

001

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK
DRILL **DEEPEN**

b. TYPE OF WELL
Oil Gas Well Well Other Single Zone Multiple Zone

2. Name of Operator
EOG RESOURCES, INC.

3. Address and Telephone Number
P.O. BOX 1815, VERNAL, UT 84078 (435)789-0790

4. Location of Well (Report location clearly and in accordance with any State requirements.)
At surface **667' FNL & 665' FEL ^{4439619Y} NE/NE ^{40.09970}**
At proposed prod. Zone **^{623498X} - 109.55116**

14. Distance in miles and direction from nearest town or post office
8.65 MILES SOUTHEAST OF OURAY, UTAH

15. Distance from proposed location to nearest property or lease line, ft. **665'**
(Also to nearest drig. Unit line, if any)

16. No. of acres in lease **1280**

17. No. of acres assigned to this well

18. Distance from proposed location to nearest well, drilling, completed, or applied for, on this lease, ft.

19. Proposed depth **7900'**

20. Rotary or cable tools
ROTARY

21. Elevations (show whether DF, RT, GR, etc.)
4769.4 FEET GRADED GROUND

22. Approx. date work will start
UPON APPROVAL

5. Lease designation and serial number
U-0803

6. If Indian, Allottee or Tribe name
UTE INDIAN TRIBE

7. Unit Agreement Name

8. Farm or lease name, well no.
NORTH DUCK CREEK 203-28

9. API Well No.
NORTH DUCK CREEK 203-28

10. Field and pool, or wildcat
WASATCH

11. Sec., T., R., M., or BLK. and survey or area
SEC. 28, T8S, R21E

12. County or parish
UINTAH

13. State
UTAH

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
11"		8 5/8"	24#	500'+/-	220-275 SX CLASS "G" + 2%
or 12 1/4"		9 5/8"	32.30#	500'+/-	CaCl2 + 1/4 #/SX CELLOFLAKE.
7 7/8"		4 1/2"	10.50#	7900'	50/50 POXMIX + 2% GEL + 10%

SEE ATTACHMENTS FOR:

- 8 POINT PLAN
- BOP SCHEMATIC
- SURFACE USE AND OPERATING PLAN
- LOCATION PLAT
- LOCATION LAYOUT
- TOPOGRAPHIC MAPS "A", "B", AND "C"
- GAS SALES PIPELINE—MAP "D"

CONFIDENTIAL

SALT TO 400' ABOVE ALL ZONES OF INTEREST (+10% EXCESS).
LIGHT CEMENT (11PPG+) + LCM TO 200' ABOVE OIL SHALE OR FRESH WATER INTERVALS (+ 5% EXCESS).

EOG RESOURCES, INC. WILL BE THE DESIGNATED OPERATOR OF THE SUBJECT WELL UNDER BOND #NM 2308

RECEIVED

JAN 02 2003

Pc: UTAH DIVISION OF OIL, GAS, AND MINING
BUREAU OF INDIAN AFFAIRS

DIV. OF OIL, GAS & MINING

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

SIGNED *[Signature]* TITLE Agent DATE 12-20-2002

(This space for Federal or State office use)

PERMIT NO. 43-047-34847 APPROVAL DATE _____

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.


CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY *[Signature]* TITLE BRADLEY G. HILL ENVIRONMENTAL SCIENTIST III DATE 01-07-03

Federal Approval of this Action is Necessary


T8S, R21E, S.L.B.&M.

Well location, N. DUCK CREEK #203-28, located as shown in the NE 1/4 NE 1/4 of Section 28, T8S, R21E, S.L.B.&M. Uintah County, Utah.

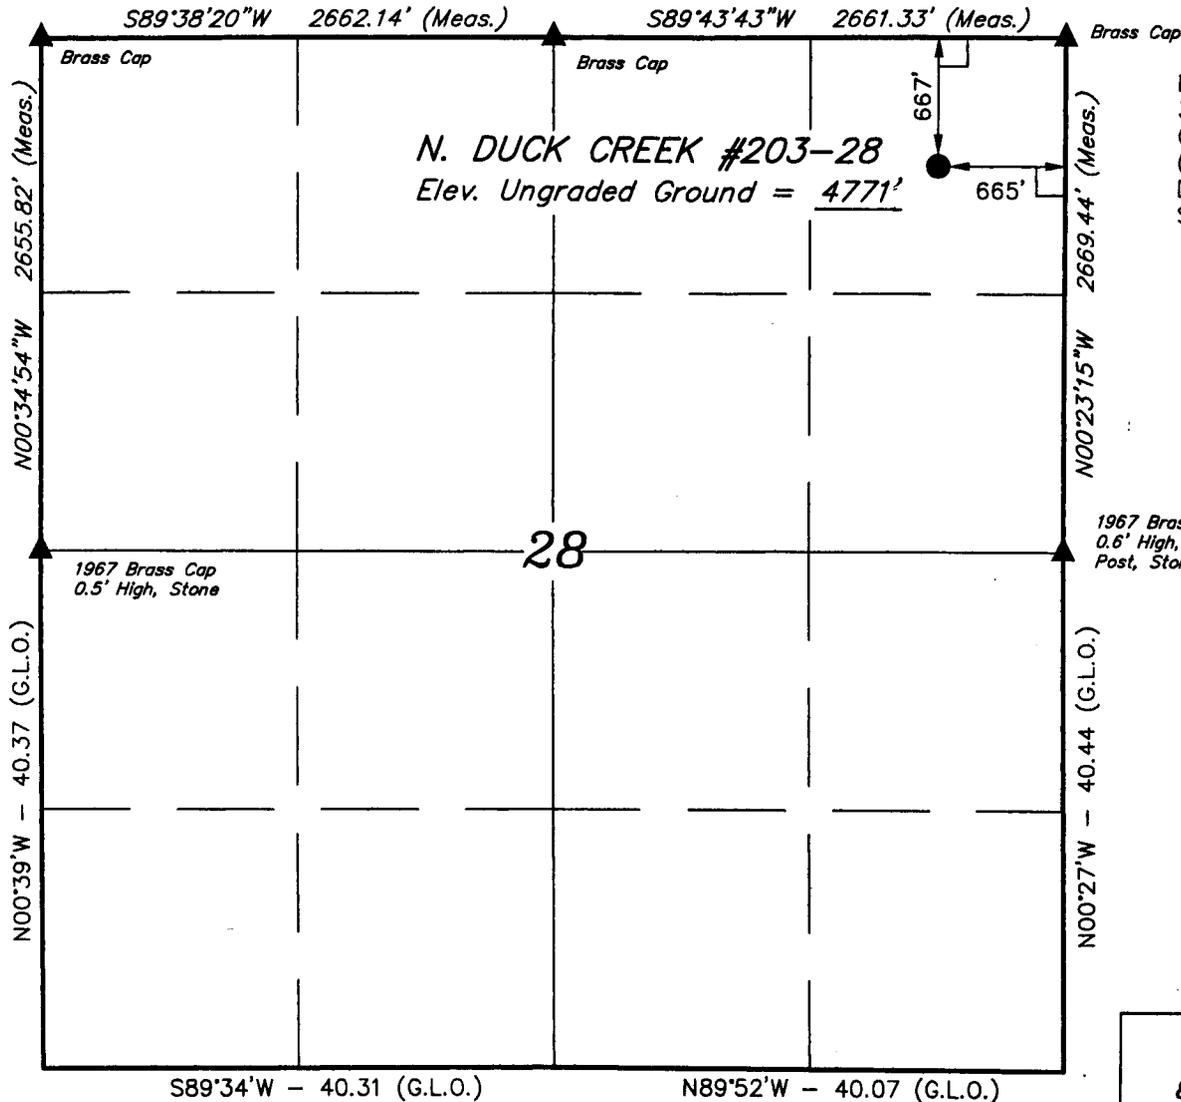

BASIS OF ELEVATION

BENCH MARK 20EAM LOCATED IN THE SE 1/4 OF SECTION 35, T8S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4697 FEET.

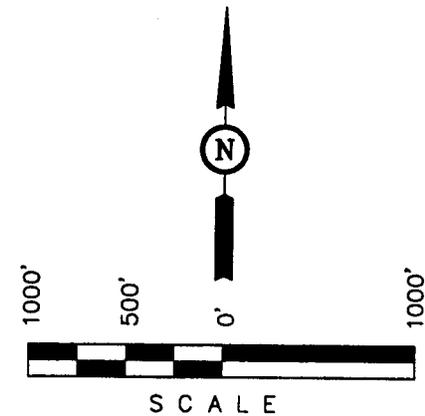

SCALE

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Robert L. Kay
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 161319
 STATE OF UTAH
 KAY

S89°34'W - 40.31 (G.L.O.) N89°52'W - 40.07 (G.L.O.)

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

(NAD 27)

LATITUDE = 40°05'58.93" (40.099667)

LONGITUDE = 109°33'04.09" (109.551825)

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

UNTAH ENGINEERING & LAND SURVEYING		
85 SOUTH 200 EAST - VERNAL, UTAH 84078		
(435) 789-1017		
SCALE 1" = 1000'	DATE SURVEYED: 07-31-02	DATE DRAWN: 08-01-02
PARTY D.A. J.A. D.R.B.	REFERENCES G.L.O. PLAT	
WEATHER HOT	FILE EOG RESOURCES, INC.	

EOG Resources, Inc.
P.O. Box 250
Big Piney, WY 83113

December 20, 2002

Utah Division of Oil, Gas, & Mining
1594 West North Temple, Suite 1210
P.O. Box 145801
Salt Lake City, UT 84114-5801

RE: APPLICATION FOR PERMIT TO DRILL
NORTH DUCK CREEK 203-28
NE/NE, SEC. 28, T8S, R21E
UINTAH COUNTY, UTAH
LEASE NO.: U-0803
UTE INDIAN TRIBAL LANDS

Enclosed please find a copy of the Application for Permit to Drill and associated attachments for the referenced well.

Please address further communication regarding this matter (including approval) to:

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Phone: (435)789-4120
Fax: (435)789-1420

Sincerely,



Ed Trotter
Agent
EOG Resources, Inc.

Attachments

EIGHT POINT PLAN
NORTH DUCK CREEK 203-28
NE/NE, SEC. 28, T8S, R21E, S.L.B.&M.
UINTAH COUNTY, UTAH

1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:

FORMATION	DEPTH	TYPE ZONES	MAXIMUM PRESSURE
Green River FM	2253		
"M" Marker	5406		
Wasatch	5830	GAS	
Chapita Wells	6516	GAS	
Buck Canyon	7417	GAS	

EST. TD: 7900

Anticipated BHP 3400 PSI

3. PRESSURE CONTROL EQUIPMENT: BOP Schematic Diagram attached.

4. CASING PROGRAM:

<u>HOLE SIZE</u>	<u>INTERVAL</u>	<u>LENGTH</u>	<u>SIZE</u>	<u>WEIGHT</u>	<u>GRADE</u>	<u>THREAD</u>	<u>MINIMUM SAFETY FACTOR</u>		
							<u>COLLAPSE</u>	<u>BURST</u>	<u>TENSILE</u>
11	0' - 500'±	500'±	8 5/8	24.0 #	J-55	ST&C	1370 PSI	2950 PSI	263,000#
or									
12 ¼	0' - 500'±	500'±	9 5/8	32.3 #	H-40	ST&C	1370 PSI	2270 PSI	254,000#
7 7/8	0' - 7900'	7900'	4 ½	10.5 #	J-55	ST&C	4010 PSI	4790 PSI	146,000#

If conductor drive pipe is used, it will be left in place if its total length is less than 20 feet below the surface. If the total length of the drive pipe is equal to or greater than 20 feet, it will be pulled prior to cementing surface casing, or it will be cemented in place. The minimum diameter of the conductor drive pipe will be 13 3/8".

All casing will be new or inspected.

5. MUD PROGRAM

<u>INTERVAL</u>	<u>MUD TYPE</u>
0' - 220'	Air
240' - 4000'	Air/Mist & Aerated Water
4000' - TD	Air/3% KCL water or KCL substitute

Lost circulation probable from 1500' to 3000'+/-.

Sufficient mud inventory will be maintained on location during drilling to handle any adverse conditions that may arise.

EIGHT POINT PLAN

NORTH DUCK CREEK 203-28
NE/NE, SEC. 28, T8S, R21E, S.L.B.&M.
UINTAH COUNTY, UTAH

6. VARIANCE REQUESTS:

- A. EOG Resources, Inc. requests a variance to regulations requiring a straight run blooie line (Where possible, a straight run blooie line will be used).
- B. EOG Resources, Inc. requests a variance to regulations requiring an automatic ignitor or continuous pilot light on the blooie line. (Not required on aerated water system).
- C. EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. To reduce location excavation, the blooie line will be 75' in length.

7. EVALUATION PROGRAM:

Logs: Platform Express
RST

TD to 4100'

TD to 4100' Frec Log Run Schlumber to process & display NPHI/DPHI, Sg, Resistivity

STACK RST WITH CCL/CBL

TD to 4100' & 200' above cement top

Cores: None Programmed

DST: None Programmed

Completion: To be submitted at a later date.

Note: If hole conditions prevent the running of open hole logs, a cased hole Dipole Sonic/Neutron/Gr will be run in lieu of open hole logs.

8. ABNORMAL CONDITIONS:

None anticipated.

9. STANDARD REQUIRED EQUIPMENT:

- A. Choke Manifold
- B. Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

EIGHT POINT PLAN

NORTH DUCK CREEK 203-28
NE/NE, SEC. 28, T8S, R21E, S.L.B.&M.
UINTAH COUNTY, UTAH

10. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.


(Attachment: BOP Schematic Diagram)

5000 PSIG DIAGRAM

ANNULAR PREVENTOR AND BOTH RAMS ARE 5000 PSIG RATED.
CASING FLANGE IS 11" 5000 PSIG RATED.
BOPE 11" 5000 PSIG

TESTING PROCEDURE:

1. BOPE's will be tested with a professional tester to conform to Onshore Order #2 with retest every 14 days.
2. Blind & Pipe rams will be tested to rated working pressure, 5000 psig.
3. Annular preventor will be tested to 50% of working pressure, 2500 psig.
4. Casing will be tested to 0.22 psi/ft. or 2500 psig. Not to exceed 70% of burst strength, whichever is greater.
5. All lines subject to well pressure will be pressure-tested to the same pressure as blind & pipe rams.
6. All BOPE specifications and configurations will meet Onshore Order #2 requirements for 5000 psig BOPE specifications.

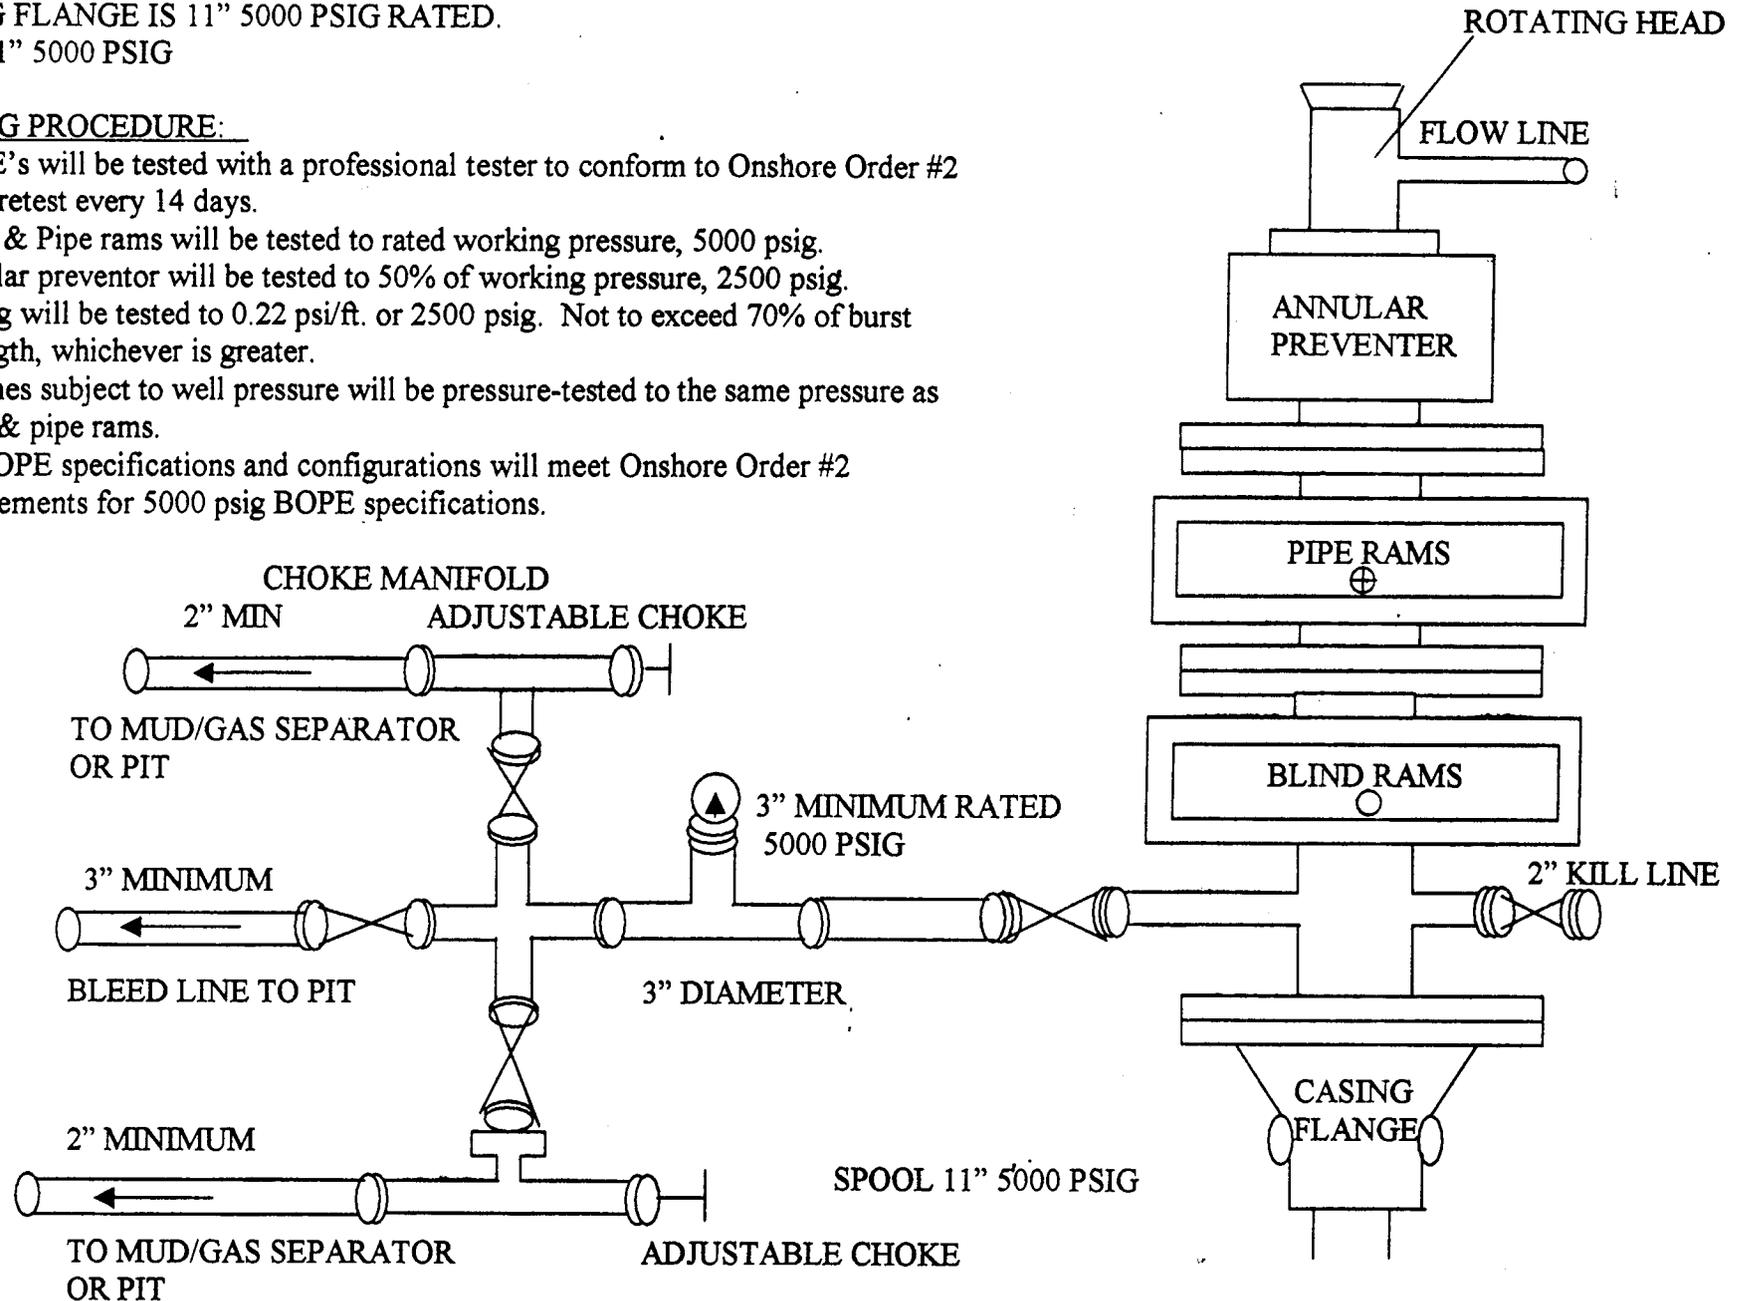

**CONDITIONS OF APPROVAL
FOR THE SURFACE USE PROGRAM OF THE
APPLICATION FOR PERMIT TO DRILL**

Company/Operator: EOG Resources, Inc.
Well Name & Number: North Duck Creek 203-28
Lease Number: U-0803
Location: 667' FNL & 665' FEL, NE/NE, Sec. 28,
T8S, R21E, S.L.B.&M., Uintah County
Surface Ownership: Ute Indian Tribe

NOTIFICATION REQUIREMENTS

Location Construction - forty-eight (48) hours prior to construction of location and access roads.

Location Completion - prior to moving on the drilling rig.

Spud Notice: - at least twenty-four (24) hours prior to spudding the well.

Casing String and Cementing - twenty-four (24) hours prior to running casing and cementing all casing strings.

BOP and related Equipment Tests - twenty-four (24) hours prior to running casing and tests.

First Production Notice - within five (5) business days after new Well begins or production resumes after Well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

THIRTEEN POINT SURFACE USE PROGRAM

1. EXISTING ROADS

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 8.65 miles southeast of Ouray, Utah - See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

2. PLANNED ACCESS ROAD

- A. The access road will be approximately 0.3 miles in length. See attached TOPO Map "B".
- B. The access road has a 30 foot ROW w/ 18 foot running surface.
- C. Maximum grade on access road will be 8%.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No culverts, bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

All travel will be confined to existing access road Right-of-Way. Access roads and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service Publication: Surface Operating Standards For Oil & Gas Exploration and Development, (1989).

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of-Way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of

drainage ditches by run off water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud-holes develop, they shall be filled in and detours around them avoided.

As operator, EOG Resources, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

3. **LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION**

- A. Abandoned wells – 2*
- B. Temporarily abandoned wells – 1*
- C. Producing wells - 12*
- D. Shut in wells – 1*

(*See attached TOPO map “C” for location)

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

A. **ON WELL PAD**

- 1. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of well head valves, separator, dehy, 210 Bbl condensate tank, meter house, and attached piping.
- 2. Gas gathering lines - A 3” gathering line will be buried from dehy to the edge of the location.

B. **OFF WELL PAD**

- 1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
- 2. A 3” OD steel above ground natural gas pipeline will be laid approximately 650’ from proposed location to a point in the NE/NE of Section 28, T8S, R21E, where it will tie into Questar Pipeline Co.’s existing line. Proposed pipeline crosses BIA administered lands, thus a Right-of -Way grant will be required.
- 3. Proposed pipeline will be a 3” OD steel, welded line laid on the surface.
- 4. Protective measures and devices for livestock and wildlife will be taken and/or installed where required.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire contents of the

largest tank within the facility/battery, unless more stringent protective requirements are deemed necessary by the authorized officer.

The production facilities will be placed on the East side of the location.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities required will be painted within 6 months of installation. Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

The required paint color is Carlsbad Canyon.

If at any time the facilities located on public land and authorized by the terms of the lease are no longer included in the lease (due to a construction in the unit or other lease or unit boundary change), the BIA will process a change in authorization to the appropriate rental or other financial obligation as determined by the authorized officer.

5. LOCATION & TYPE OF WATER SUPPLY

- A. Water supply will be from the Ouray Brine Plant at Ouray, Utah, and/or Target Trucking Inc.'s water source in the SW/SW, Sec. 35, T9S, R22E, Uintah County, Utah (State Water Right #49-1501). Produced water from the Chapita Wells and Stagecoach Units will also be used.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. SOURCE OF CONSTRUCTION MATERIAL

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of the location.
- B. All construction material will come from Tribal Land.
- C. No mineral materials will be required.

7. METHODS OF HANDLING WASTE DISPOSAL

A. METHODS AND LOCATION

- 1. Cuttings will be confined in the reserve pit.
- 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
- 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah County landfill.

4. Produced wastewater will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. After the 90 day period, the produced water will be contained in a tank on location and then disposed of at one of the following three locations: Natural Buttes Unit 21-20B SWD, Ace Disposal, or EOG Resources, Inc. drilling operations (Chapita Wells Unit, Natural Buttes Unit & Stagecoach Unit).
 5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.
- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit or be removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

On BIA administered land:

The reserve pit will be constructed so as not to leak, break, or allow discharge.

The reserve pit shall be lined.

8. **ANCILLARY FACILITIES**

- A. No airstrips or camps are planned for this well.

9. **WELLSITE LAYOUT**

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The reserve pit will be located on the Northwest corner of the location. The flare pit will be located downwind of the prevailing wind direction on the North side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled topsoil will be stored on the South side.

Access to the well pad will be from the West.

FENCING REQUIREMENTS:

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until cleanup.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BIA or SMA specifications. A cattleguard with an adjacent 16-foot gate shall be installed in any fence where a road is to be regularly traveled. If the well is a producer, the cattleguards (shall/shall not) be permanently mounted on concrete bases. Prior to crossing any fence located on Tribal land, or any fence between Tribal land and private land, the operator will contact the BIA, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

10. PLANS FOR RESTORATION OF SURFACE

A. PRODUCING LOCATION

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours.

The reserve pit will be reclaimed within 12 months from the date of well completion. Before any dirt work takes place, the reserve pit will be

completely dry and all cans, barrels, pipe, fluid, and hydrocarbons, will be removed.

Contact appropriate surface management agency for required seed mixture.

B. DRY HOLE/ABANDONED LOCATION

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BIA will attach the appropriate surface rehabilitation conditions of approval.

11. SURFACE OWNERSHIP

Access road: Tribal

Location: Tribal

12. OTHER INFORMATION

A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to:

-whether the materials appear eligible for the National Register of Historic Places;

-the mitigation measures the operator will likely have to undertake before the site can be used.

-a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs.

The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

B. As operator, EOG Resources, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable

facilities. A list of noxious weeds will be obtained from the BIA, or the appropriate County Extension Office. On BIA administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.

- C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on Tribal Lands after the conclusion of drilling operations or at any other time without BIA authorization. However, if BIA authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BIA does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

Additional Surface Stipulations

None

LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION

<u>Operations</u>		<u>Permitting</u>
EOG Resources, Inc. P.O. Box 250 Big Piney, WY 83113 Jim Schaefer Telephone (307)276-3331	EOG Resources, Inc. P.O. Box 1815 Vernal, UT 84078 George McBride Telephone (435)789-0790	Ed Trotter P.O. Box 1910 Vernal, UT 84078 Telephone: (435)789-4120 Fax: (435)789-1420

All lease or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. EOG Resources, Inc. is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.

The BIA office shall be notified upon site completion prior to moving on the drilling rig.

Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions that presently exist; that the statements made in the Plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by EOG Resources, Inc. and its contractors and subcontractors in conformity with this Plan and the terms and conditions under which it is approved.

12-20-2002
Date


Agent

EOG RESOURCES, INC

N. DUCK CREEK #203-28

LOCATED IN Uintah COUNTY, UTAH
SECTION 28, T8S, R21E, S.1.B.&M.

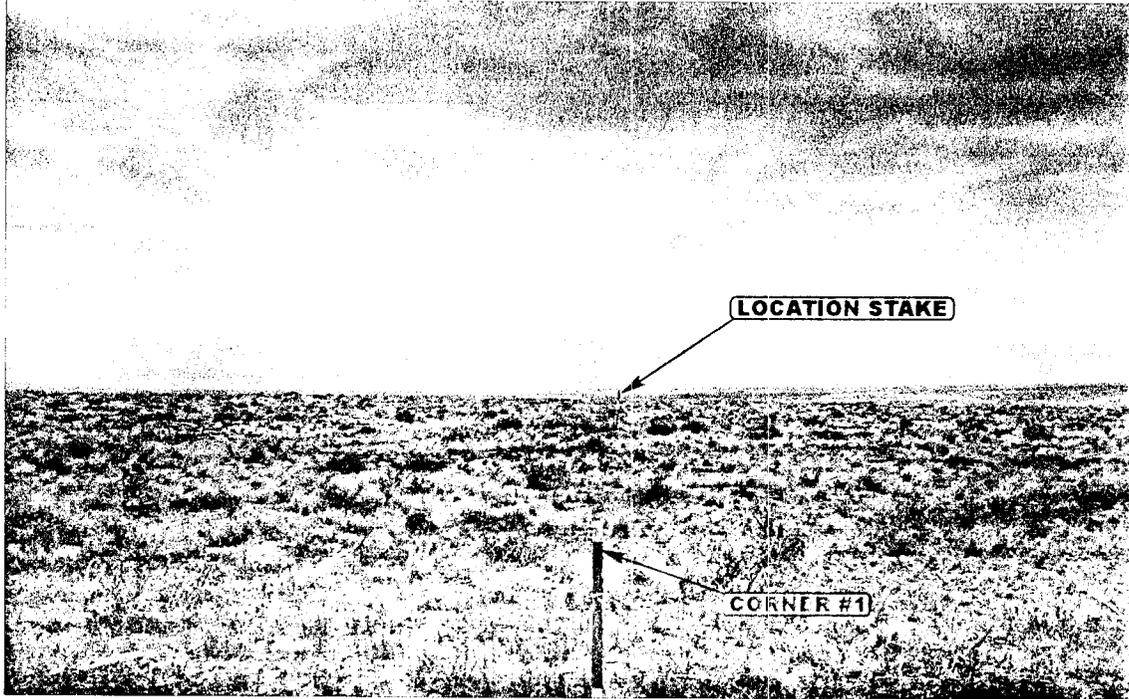


PHOTO: VIEW FROM CORNER #1 TO LOCATION STAKE

CAMERA ANGLE: NORTHERLY

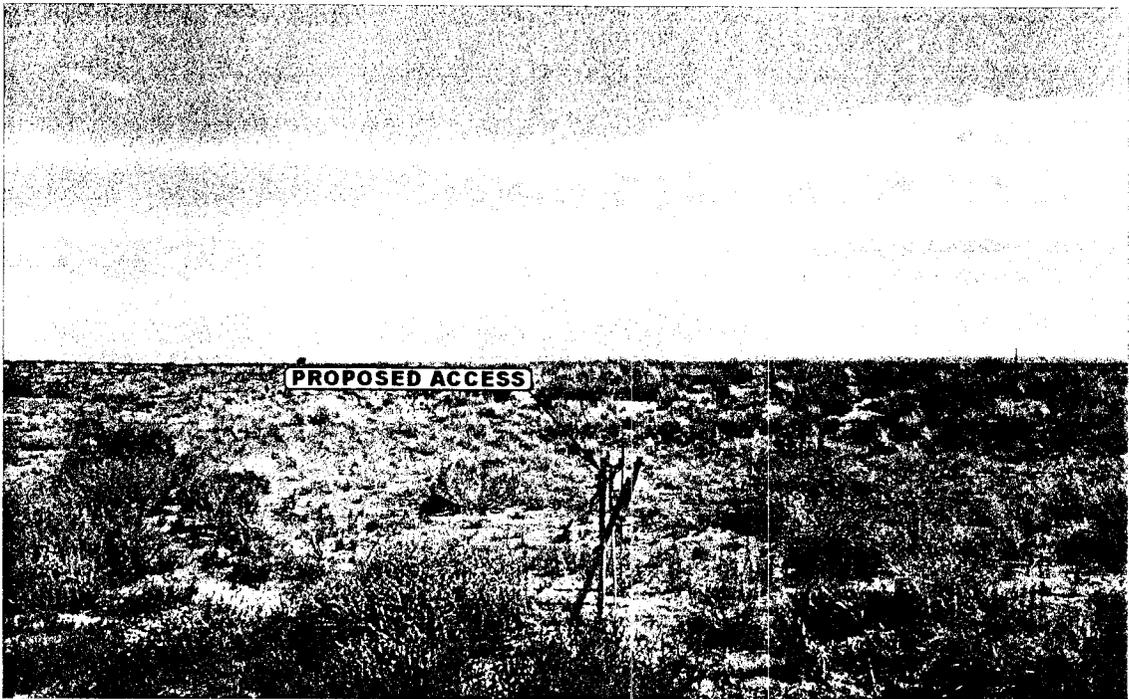


PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: SOUTHEASTERLY




Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS	8	6	02	PHOTO
TAKEN BY: D.A.	MONTH	DAY	YEAR	
DRAWN BY: K.G.	REVISED: 00-00-00			

EOG RESOURCES, INC.

LOCATION LAYOUT FOR

N. DUCK CREEK #203-28
SECTION 28, T8S, R21E, S.L.B.&M.
667' FNL 665' FEL

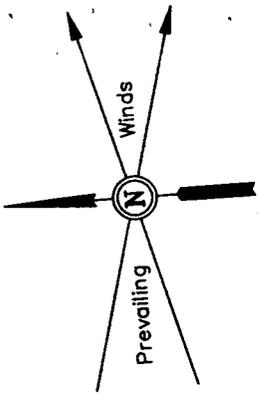

F-0.6'
El. 68.8'

GRADE
El. 69.4'

C-3.0'
El. 72.4'



SCALE: 1" = 50'
DATE: 09-01-00
Drawn By: D.R.B.

Approx.
Toe of
Fill Slope

Sta. 3+25

Approx.
Top of
Cut Slope

NOTE:
Flare Pit is to
be located a min.
of 100' from the
Well Head.

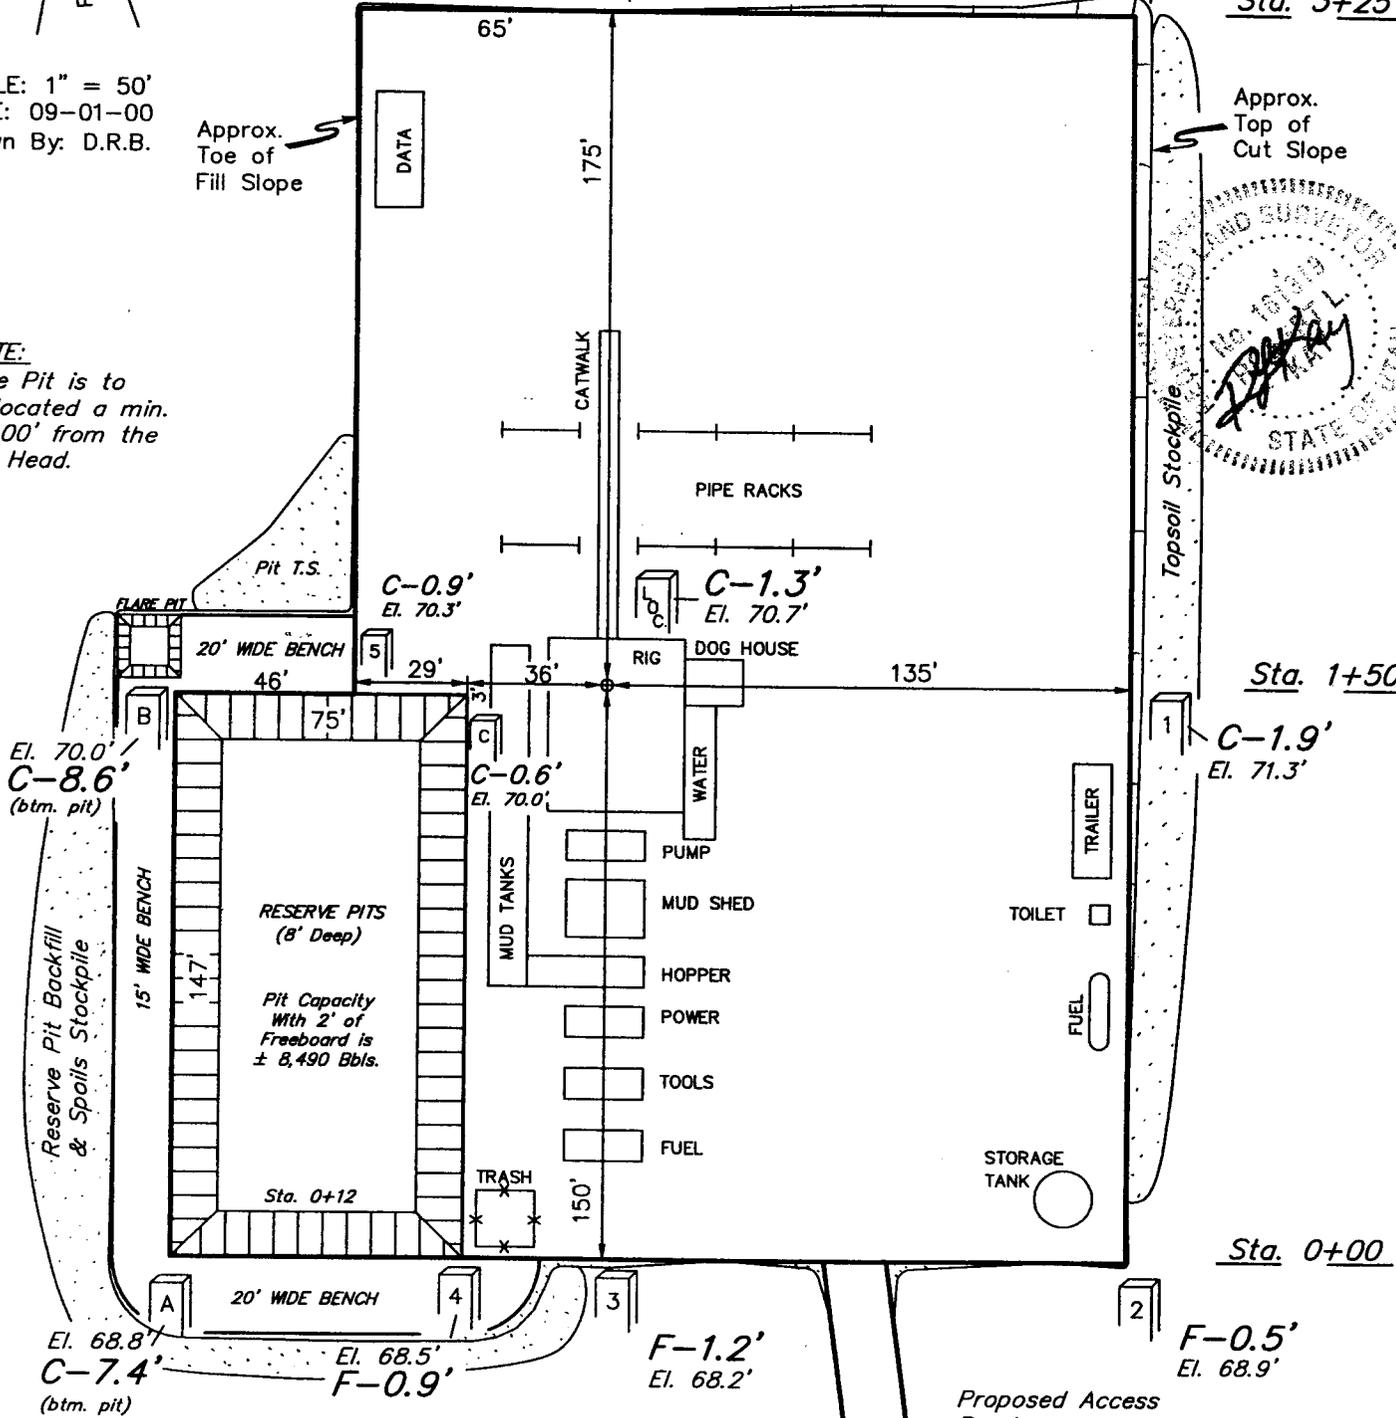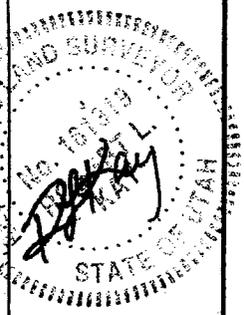


Elev. Ungraded Ground at Location Stake = 4770.7
Elev. Graded Ground at Location Stake = 4769.4'

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017





EOG RESOURCES, INC.

TYPICAL CROSS SECTIONS FOR

N. DUCK CREEK #203-28
SECTION 28, T8S, R21E, S.L.B.&M.
667' FNL 665' FEL

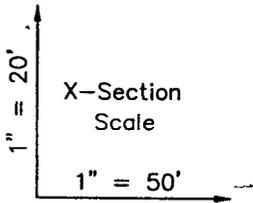

DATE: 09-01-00
Drawn By: D.R.B.

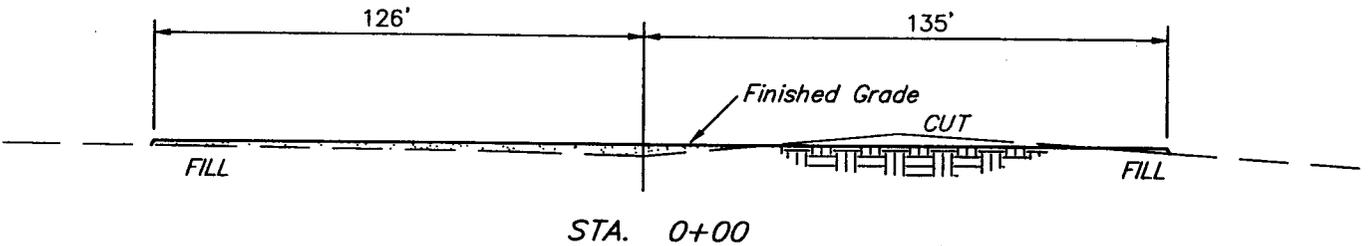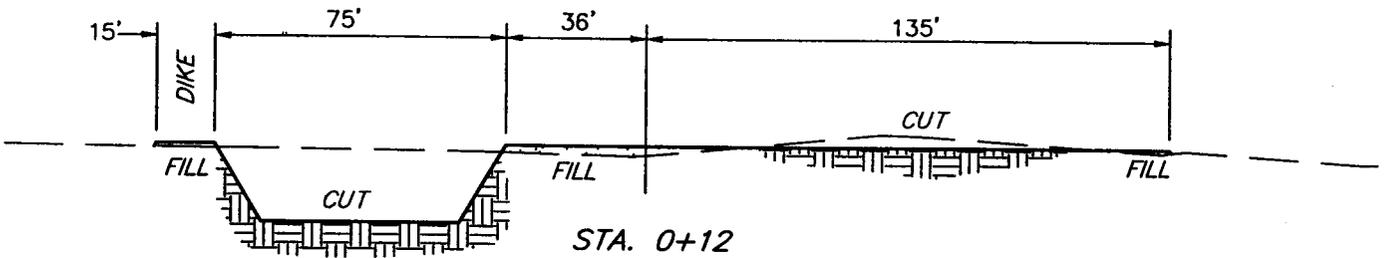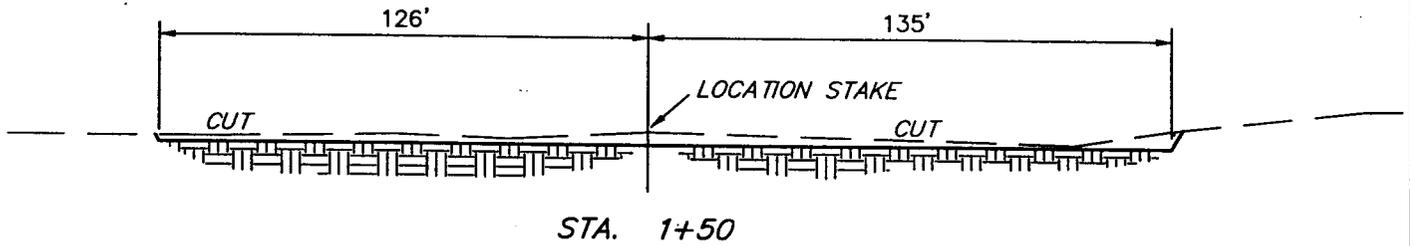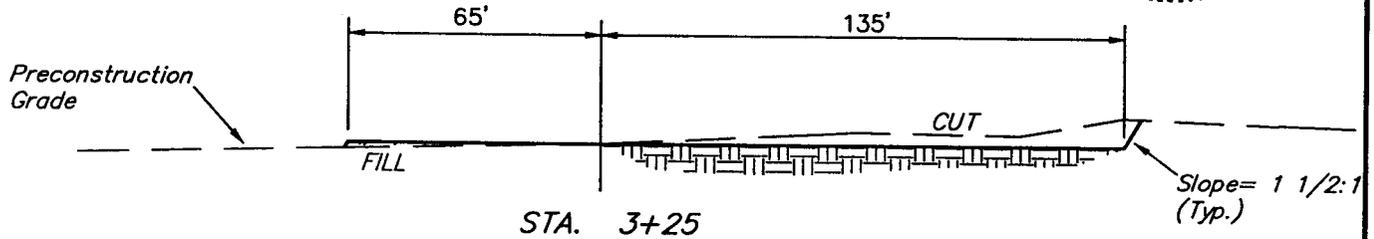


APPROXIMATE YARDAGES

(12") Topsoil Stripping	=	2,860 Cu. Yds.
Remaining Location	=	2,430 Cu. Yds.
TOTAL CUT	=	5,290 CU.YDS.
FILL	=	1,100 CU.YDS.

EXCESS MATERIAL AFTER 5% COMPACTION	=	4,130 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	=	4,130 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	=	0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

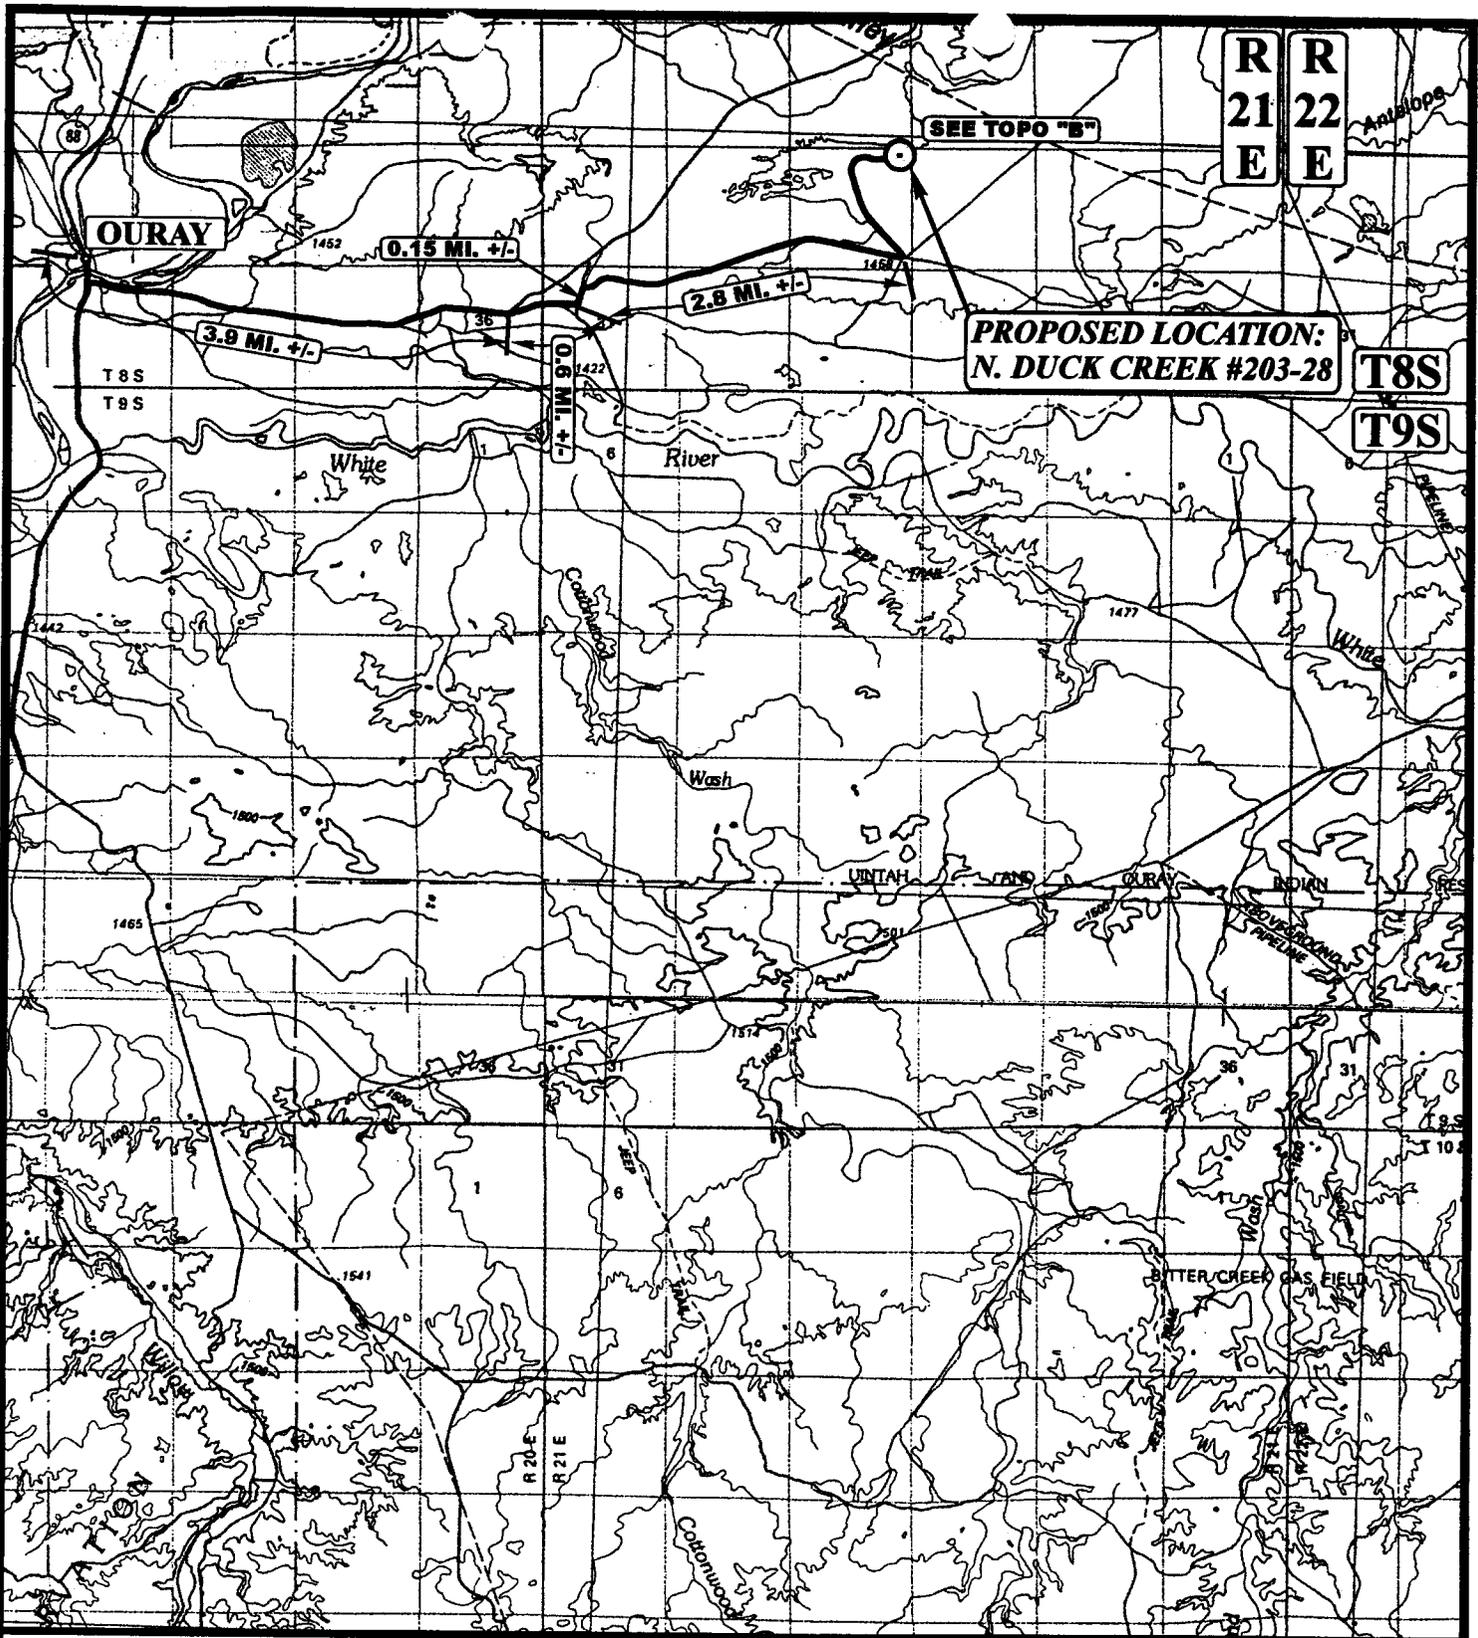

R 21 E
R 22 E

SEE TOPO "B"

OURAY

0.15 MI. +/-

2.8 MI. +/-

3.9 MI. +/-

**PROPOSED LOCATION:
N. DUCK CREEK #203-28**

T8S

T9S

T8S
T9S

White River

White River

Wash

UNTAM

OURAY

INDIAN

BITTER CREEK GAS FIELD

R 20 E
R 21 E

LEGEND:

⊙ PROPOSED LOCATION



EOG RESOURCES, INC.

**N. DUCK CREEK #203-28
SECTION 28, T8S, R21E, S.L.B.&M.
667' FNL 665' FEL**




Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC **8** **6** **02**
MAP MONTH DAY YEAR
SCALE: 1: 100,000 DRAWN BY: K.G. REVISED: 00-00-00



**R
21
E**

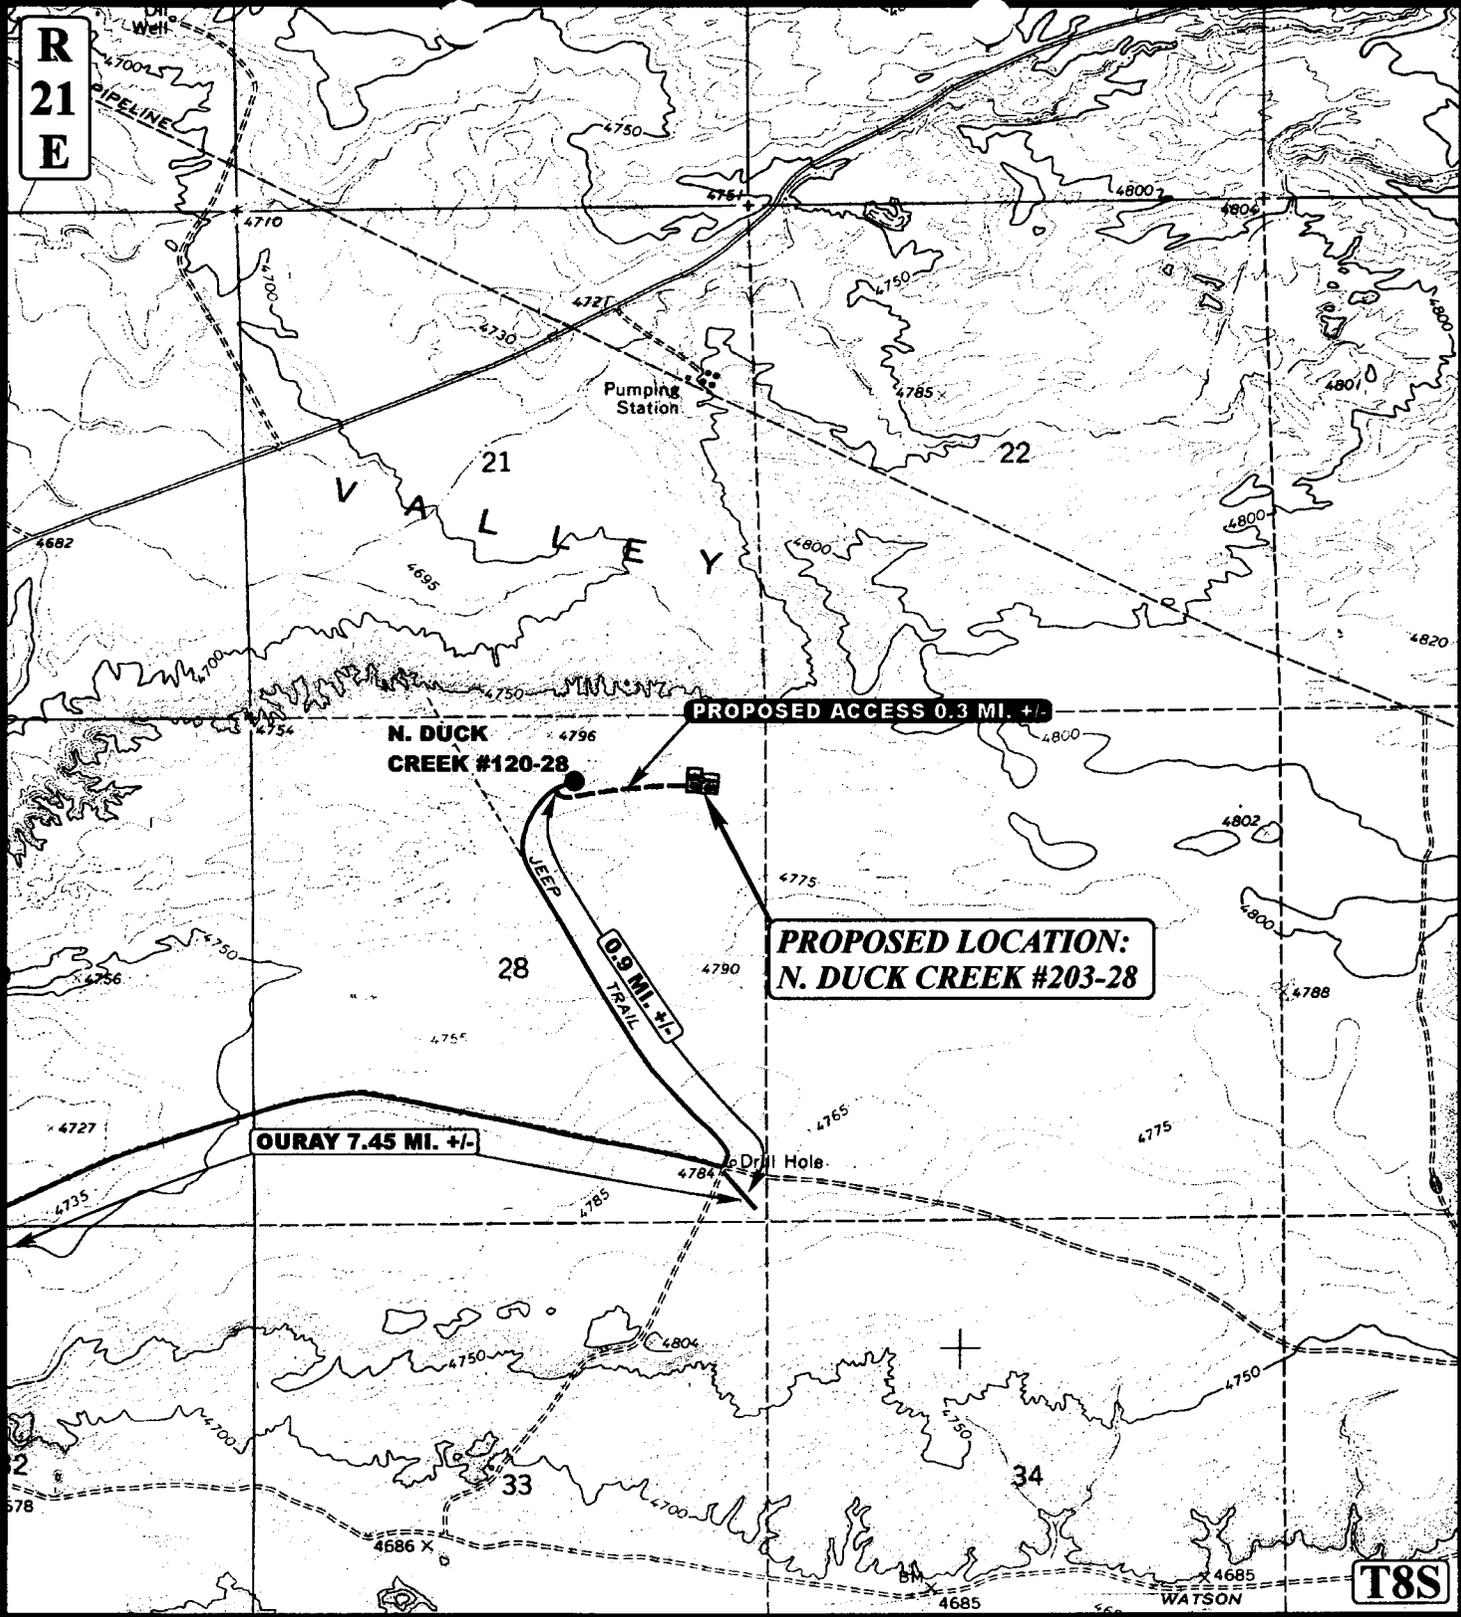

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING ROAD



EOG RESOURCES, INC.

N. DUCK CREEK #203-28
SECTION 28, T8S, R21E, S.L.B.&M.
667' FNL 665' FEL




Utah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC	8	6	02
MAP	<small>MONTH</small>	<small>DAY</small>	<small>YEAR</small>
<small>SCALE: 1" = 2000'</small>	<small>DRAWN BY: K.G.</small>		<small>REVISED: 00-00-00</small>



**R
21
E**

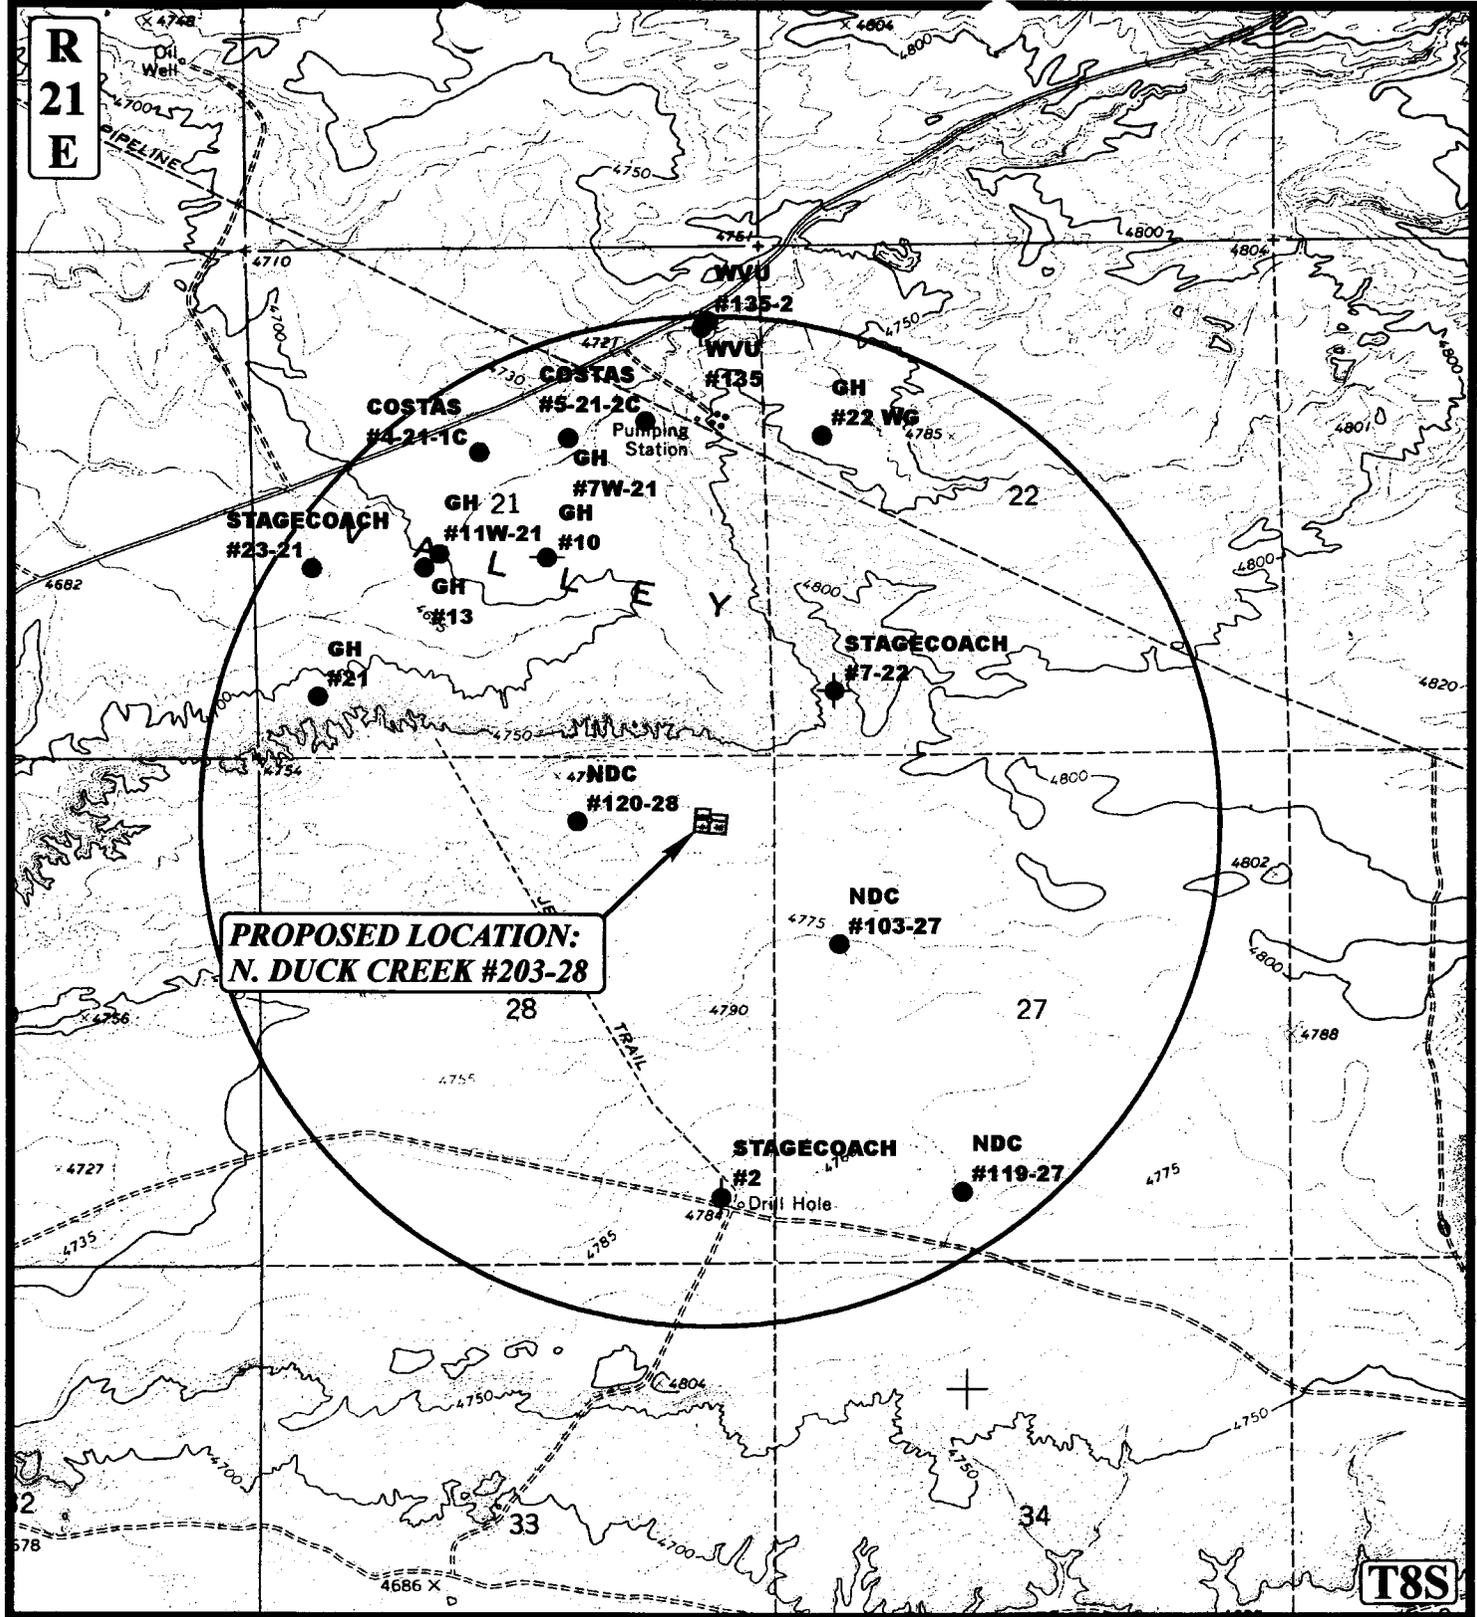

**PROPOSED LOCATION:
N. DUCK CREEK #203-28**

LEGEND:

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ⊕ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED



EOG RESOURCES, INC.


**N. DUCK CREEK #203-28
SECTION 28, T8S, R21E, S.L.B.&M.
667' FNL 665' FEL**

U&Ls Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC 8 6 02
MAP MONTH DAY YEAR
SCALE: 1" = 2000' DRAWN BY: K.G. REVISED: 00-00-00

T8S

C
TOPO

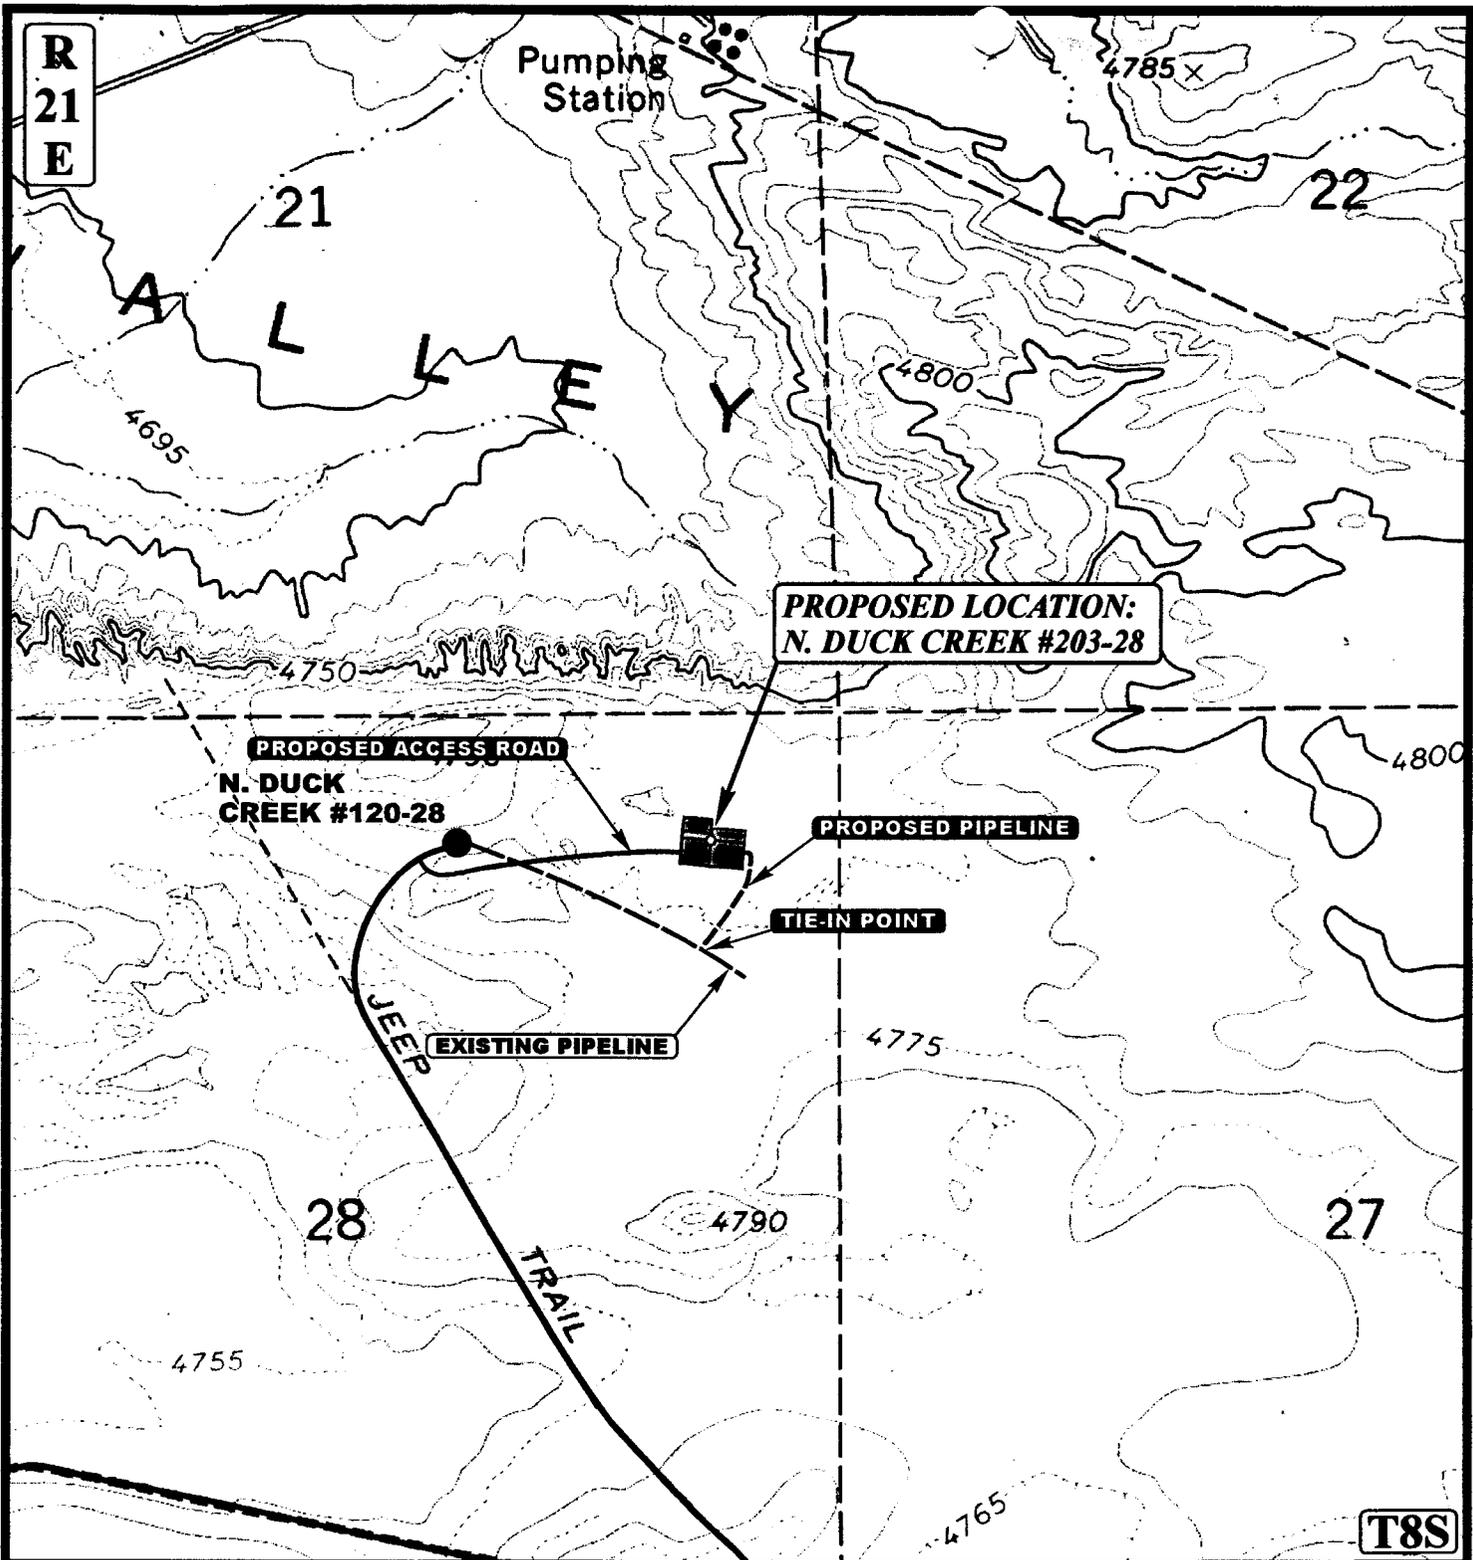

APPROXIMATE TOTAL PIPELINE DISTANCE = 650' +/-

LEGEND:

- EXISTING PIPELINE
- - - - - PROPOSED PIPELINE
- PROPOSED ACCESS



EOG RESOURCES, INC.

N. DUCK CREEK #203-28
SECTION 28, T8S, R21E, S.L.B.&M.
 667' FNL 665' FEL



Utah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC 8 6 02
MAP MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: K.G. REVISED: 00-00-00



003

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 01/02/2003

API NO. ASSIGNED: 43-047-34847

WELL NAME: N DUCK CREEK 203-28
OPERATOR: EOG RESOURCES INC (N9550)
CONTACT: ED TROTTER/AGENT

PHONE NUMBER: 435-789-0790

PROPOSED LOCATION:
NENE 28 080S 210E
SURFACE: 0667 FNL 0665 FEL
BOTTOM: 0667 FNL 0665 FEL
UINTAH
WONSITS VALLEY (710)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal
LEASE NUMBER: U-0803
SURFACE OWNER: 2 - Indian
PROPOSED FORMATION: WSTC

LATITUDE: 40.09970
LONGITUDE: 109.55116

RECEIVED AND/OR REVIEWED:


- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. NM 2308)
- N Potash (Y/N)
- N Oil Shale 190-5 (B) or 190-3 or 190-13
- N Water Permit
(No. 49-1501)
- N RDCC Review (Y/N)
(Date: _____)
- NA Fee Surf Agreement (Y/N)

LOCATION AND SITING:


- R649-2-3.
Unit _____
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: 173-16
Eff Date: 1-13-00
Siting: 460' fr boundary & 920' fr other wells.
- R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: 1-federal approval

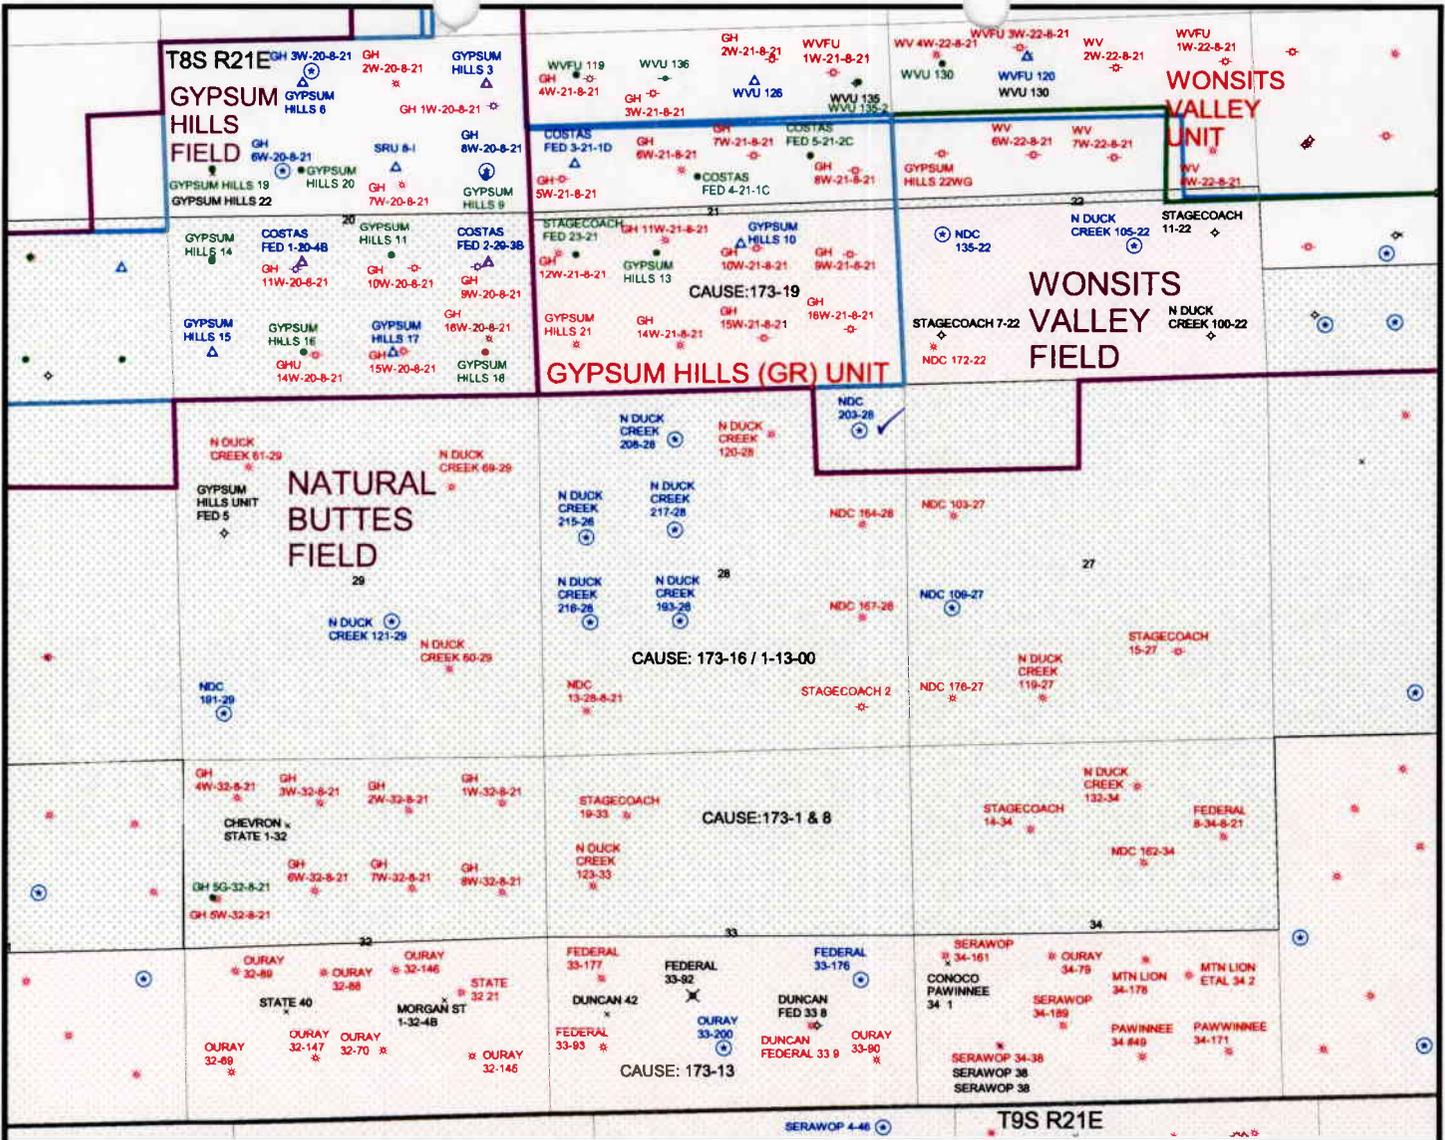


OPERATOR: EOG RESOURCES (N9550)
SEC. 28 T8S, R21E
FIELD: NATURAL BUTTES (630)
COUNTY: UINTAH
SPACING: 173-16 / 1-13-00

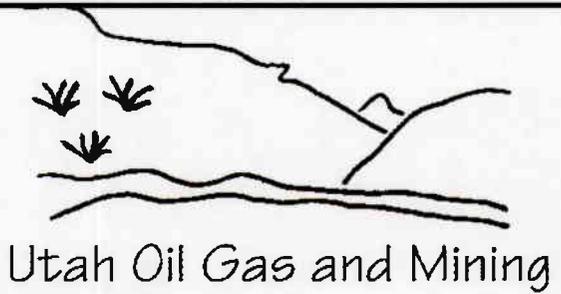

- | WELLS | | UNIT STATUS | |
|-------|---------------------|-------------|--------------|
| ♣ | GAS INJECTION | □ | EXPLORATORY |
| ◻ | GAS STORAGE | □ | GAS STORAGE |
| * | LOCATION ABANDONED | □ | NF PP OIL |
| ⊙ | NEW LOCATION | □ | NF SECONDARY |
| ◆ | PLUGGED & ABANDONED | □ | PENDING |
| • | PRODUCING GAS | □ | PI OIL |
| • | PRODUCING OIL | □ | PP GAS |
| • | SHUT-IN GAS | □ | PP GEOTHERML |
| • | SHUT-IN OIL | □ | PP OIL |
| × | TEMP. ABANDONED | □ | SECONDARY |
| ○ | TEST WELL | □ | TERMINATED |
| ▲ | WATER INJECTION | | |
| ◆ | WATER SUPPLY | | |
| ♣ | WATER DISPOSAL | | |

- | FIELD STATUS | |
|--------------|-----------------|
| □ | ABANDONED |
| □ | ACTIVE |
| □ | COMBINED |
| □ | INACTIVE |
| □ | PROPOSED |
| □ | STORAGE |
| □ | TERMINATED |
| □ | COUNTY BOUNDARY |
| □ | SECTION LINES |
| □ | TOWNSHIP LINES |

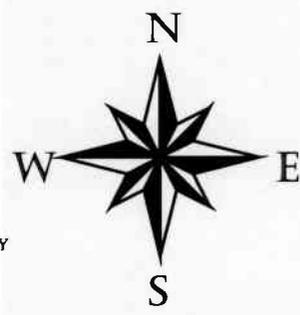

PREPARED BY: DIANA MASON
 DATE: 7-JANUARY-2003



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

1594 West North Temple, Suite 1210
PO Box 145801
Salt Lake City, Utah 84114-5801
(801) 538-5340 telephone
(801) 359-3940 fax
(801) 538-7223 TTY
www.nr.utah.gov

Michael O. Leavitt
Governor
Robert L. Morgan
Executive Director
Lowell P. Braxton
Division Director

January 7, 2003

EOG Resources, Inc
P O Box 1815
Vernal, UT 84078

Re: North Duck Creek 203-28 Well, 667' FNL, 665' FEL, NE NE, Sec. 28, T. 8 South,
R. 21 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-34847.

Sincerely,

A handwritten signature in black ink that reads "John R. Baza".

John R. Baza
Associate Director

pb

Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: EOG Resources, Inc
Well Name & Number North Duck Creek 203-28
API Number: 43-047-34847
Lease: U-0803

Location: NE NE **Sec.** 28 **T.** 8 South **R.** 21 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

005

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK
DRILL **DEEPEN**

b. TYPE OF WELL
 Oil Gas Well Well Other
 Single Zone Multiple Zone

2. Name of Operator
EOG RESOURCES, INC.

3. Address and Telephone Number
P.O. BOX 1815, VERNAL, UT 84078 (435)789-0790

4. Location of Well (Report location clearly and in accordance with any State requirements.)
 At surface **667' FNL & 665' FEL NE/NE**
 At proposed prod. Zone **RECEIVED**

14. Distance in miles and direction from nearest town or post office
8.65 MILES SOUTHEAST OF OURAY, UTAH

15. Distance from proposed location to nearest property or lease line, ft.
665'
 (Also to nearest drig. Unit line, if any)

16. No. of acres in lease
1280

17. No. of acres assigned to this well

18. Distance from proposed location to nearest well, drilling, completed, or applied for, on this lease, ft.

19. Proposed depth
7900'

20. Rotary or cable tools
ROTARY

21. Elevations (show whether DF, RT, GR, etc.)
4769.4 FEET GRADED GROUND

22. Approx. date work will start
UPON APPROVAL

5. Lease designation and serial number
U-0803

6. If Indian, Allottee or Tribe name
UTE INDIAN TRIBE

7. Unit Agreement Name

8. Farm or lease name, well no.
NORTH DUCK CREEK 203-28

9. API Well No.
NORTH DUCK CREEK 203-28

10. Field and pool, or wildcat
WASATCH

11. Sec., T., R., M., or BLK. and survey or area
SEC. 28, T8S, R21E

12. County or parish
UINTAH

13. State
UTAH

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
11"	8 5/8"	24#	500'+/-	220-275 SX CLASS "G" + 2%
or 12 1/4"	9 5/8"	32.30#	500'+/-	CaCl2 + 1/4 #/SX CELLOFLAKE.
7 7/8"	4 1/2"	10.50#	7900'	50/50 POXMIX + 2% GEL + 10%

SEE ATTACHMENTS FOR:

- 8 POINT PLAN
- BOP SCHEMATIC
- SURFACE USE AND OPERATING PLAN
- LOCATION PLAT
- LOCATION LAYOUT
- TOPOGRAPHIC MAPS "A", "B", AND "C"
- GAS SALES PIPELINE—MAP "D"

CONFIDENTIAL

SALT TO 400' ABOVE ALL ZONES OF INTEREST (+10% EXCESS).
 LIGHT CEMENT (11PPG+) + LCM TO 200' ABOVE OIL SHALE OR FRESH WATER INTERVALS (+ 5% EXCESS).

EOG RESOURCES, INC. WILL BE THE DESIGNATED OPERATOR OF THE SUBJECT WELL UNDER BOND #NM 2308

RECEIVED

Pc: UTAH DIVISION OF OIL, GAS, AND MINING
 BUREAU OF INDIAN AFFAIRS

FEB 19 2003

DIV. OF OIL, GAS & MINING

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

SIGNED *[Signature]* TITLE Agent DATE 12-20-2002

(This space for Federal or State office use)

NOTICE OF APPROVAL

PERMIT NO. _____ APPROVAL DATE _____

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

CONDITIONS OF APPROVAL, IF ANY: _____

APPROVED BY *[Signature]* TITLE Assistant Field Manager Mineral Resources DATE 02/06/2003

CONDITIONS OF APPROVAL ATTACHED

02PS 2544

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: EOG Resources Inc.

Well Name & Number: NORTH DUCK CREEK 203-28

API Number: 43-047-34847

Lease Number: UTU - 0803

Location: NENE Sec. 28 TWN: 08S RNG: 21E

Agreement: N/A

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

CONDITIONS OF APPROVAL FOR NOTICE TO DRILL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Submit an electronic copy of all logs run on this well in LAS format. This submission will replace the requirement for submittal of paper logs to the BLM

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

A. DRILLING PROGRAM

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands to this office prior to setting the next casing string or requesting plugging orders. Faxed copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a **3M** system and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

If an air compressor is on location and is being utilized to provide air for the drilling medium while drilling, the special drilling requirements in Onshore Oil and Gas Order No. 2, regarding air or gas drilling shall be adhered to. If a mist system is being utilized then the requirement for a deduster shall be waived.

3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint. Surface casing setting depths are based on ground level elevations only.

As a minimum, the usable water shall be isolated and/or protected by having a cement top for the production casing at least 200 ft. above the Green River Formation, identified at 2,380 ft. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

All Drill Stem tests (DST) shall be accomplished during daylight hours, unless specific approval to start during other hours is obtained from the AO. However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e., lighting which is adequate for visibility and vapor proof for safe operations). Packers can be released, but tripping should not begin before daylight unless prior approval is obtained from the AO.

A cement bond log (CBL) will be run from the production casing shoe to top of the cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. Two copies of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other sunneys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the AO.

6. Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

Immediate Report Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig. The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Such notification will be sent by telegram or other written communication, not later than five (5) days following the date on which the well is placed on production.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-5(d) shall be submitted to the appropriate Field Office within 60 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (1).

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within thirty (30) days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery. All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries and tested for meter accuracy at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office.

All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, you must contact one of the following individuals:

Ed Forsman (435) 828-7874
Petroleum Engineer

Kirk Fleetwood (435) 828-7875
Petroleum Engineer

BLM FAX Machine (435) 781-4410

EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids

**SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

EOG Resources, Inc. (EOG) will assure the Ute Tribe that any/all contractors and subcontractors have acquired a current Tribal Business License and have updated "Access Permits" prior to construction. All EOG personnel, contractors and subcontractors will have these permits in their vehicles at all times. Companies that have not complied with this COA will be in violation of the Ute Tribal Business License Ordinance, and will be subject to fines and penalties.

EOG employees, representatives, and/or authorized personnel (subcontractors) shall not carry firearms on their person or in their vehicles while working on the Uintah and Ouray Indian Reservation.

EOG employees and/or authorized personnel (subcontractors) in the field will have approved applicable APDs and/or ROW permits/authorizations on their person(s) during all phases of construction.

EOG will notify the Ute Tribe and Bureau of Indian Affairs (BIA) in writing of any requested modification of APDs or Rights-Of Way (ROW). EOG shall receive written notification of authorization or denial of the requested modification. Without authorization, EOG will be subject to fines and penalties.

The Ute Tribe Energy & Minerals Department shall be notified in writing 48 hours in advance of any construction activity. The Ute Tribal office is open Monday through Thursday. A Tribal Technician is to routinely monitor construction. EOG shall make arrangements with the Ute Energy & Minerals Department for all monitoring that will exceed regular working hours for Tribal Technicians. A qualified Archaeologist accompanied by a Tribal Technician will monitor any trenching required for the construction of the pipeline. EOG is to inform contractors to maintain construction of the pipelines within approved right of ways.

A corridor ROW, 30 feet wide and 1206 feet long, shall be granted for the new access road. Another corridor ROW, 30 feet wide and 514 feet long, shall be granted for the proposed pipeline. The constructed travel width of the access road will be limited to 18 feet. Upon authorization by the Ute Tribe Energy & Minerals Department, the road ROW may be wider where sharp curves; deep cuts and fills occur; or, where intersections with other roads are required.

Road base gravel will be used where sandy soils make travel and access for drilling operations hazardous or difficult. Berms, diversion ditches, cattle guards and culverts will be constructed where required.

Upon completion of the pertinent APD and ROWs, EOG will notify the Ute Tribe Energy & Minerals Department for a Tribal Technician to verify the Affidavit of Completion. Upon completion of each pipeline in the corridor an adequate description of the pipeline will be filed with the Ute Tribe Energy & Minerals Department.

Production waters, oil, and other byproducts shall not be placed on access roads or the well pad.

At any locations where the produced water is hauled for drilling purposes, the reserve pits must have adequate liners or clay soils and the produced water may not be injected down the annulus of a well location after drilling has been completed.

All vehicular traffic, personnel movement, construction and restoration operations will be confined to the areas examined and approved and to the existing roadways and/or evaluated access routes.

EOG will implement "Safety and Emergency Plan" and ensure plan compliance.

EOG shall stop construction activities and notify personnel from the Ute Tribe Energy & Minerals Department and BIA if cultural remains including paleontologic resources (vertebrate fossils) are exposed or identified during construction. The Ute Tribe Department of Cultural Rights and Protection and the BIA will provide mitigation measures prior to allowing construction.

EOG employees and/or authorized personnel (subcontractors) will not be allowed to collect artifacts and paleontologic fossils. No significant cultural resources shall be disturbed.

EOG will control noxious weeds on the well site and ROWs. EOG will be responsible for noxious weed control if weeds spread from the project area onto adjoining land.

Reserve pits will be lined with an impervious synthetic liner. A fence will be constructed around the reserve pit until it is backfilled. Prior to backfilling the reserve pit, all fluids will be pumped from the pit into trucks and hauled to approved disposal sites. When the reserve pits are backfilled, the surplus oil and mud, etc., will be buried a minimum of 3 feet below the surface of the soil.

A closed system will be used during production. This means that production fluids will be contained in leak-proof tanks. All production fluids will be disposed of at approved disposal sites.

Surface pipelines will be constructed to lay on the soil surface. The pipeline ROW will not be bladed or cleared of vegetation without authorization of the BIA. Surface pipelines shall be welded in place at well sites or on existing and proposed access roads and pulled into place with suitable equipment. Vehicles shall not use pipeline ROWs as access roads unless specifically authorized.

Buried pipelines shall be buried a minimum of 3 feet below the soil surface. After construction is completed the disturbed area shall be contoured to blend into the natural landscape and be reseeded between September 15 and November 1 of the year following construction with perennial vegetation seed mixture provided by the BIA or Ute Tribe.

Before the site is abandoned, EOG will be required to restore the well site and ROWs to near their original state. The disturbed areas will be reseeded with desirable perennial vegetation.

Soil erosion will be mitigated, by reseeding all disturbed areas.

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

Name of Company: EOG RESOURCES INC

Well Name: N DUCK CREEK 203-28

Api No: 43-047-34847 Lease Type: FEDERAL

Section 28 Township 08S Range 21E County UINTAH

Drilling Contractor DALL COOK'S RIG# AIR

SPUDDED:

Date 03/27/03

Time 8:00 AM

How ROTARY

Drilling will commence: _____

Reported by ED TROTTER

Telephone # 1-435-789-4120

Date 03/27/2003 Signed: CHD

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

CONFIDENTIAL

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

007

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
U 0803

6. If Indian, Allottee or Tribe Name
UTE INDIAN TRIBE

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		8. Well Name and No. NORTH DUCK CREEK 203-28
2. Name of Operator EOG RESOURCES, INC. Contact: KATY CARLSON E-Mail: Kathleen_Carlson@EOGResources.com		9. API Well No. 43-047-34847
3a. Address P.O. BOX 250 BIG PINEY, WY 83113	3b. Phone No. (include area code) Ph: 307.276.4842	10. Field and Pool, or Exploratory WASATCH
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 28 T8S R21E NENE 667FNL 665FEL		11. County or Parish, and State UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Well Spud
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. spud 12-1/4" surface hole at the subject location 3/29/2003. The contractor was Dall Cook's Air Drilling. Ed Forsman of the Vernal BLM office and Carol Daniels of the Utah Division of Oil, Gas & Mining were notified of spud 3/29/2003.

14. I hereby certify that the foregoing is true and correct.
Electronic Submission #20580 verified by the BLM Well Information System For EOG RESOURCES, INC., will be sent to the Vernal

Name (Printed/Typed) KATY CARLSON	Title REGULATORY ANALYST
Signature (Electronic Submission) <i>Katy Carlson</i>	Date 04/14/2003

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** DRAFT ** DRAFT ** DRAFT ** DRAFT ** DRAFT ** DRAFT ** DRAFT ****

RECEIVED
APR 17 2003

008

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING

OPERATOR: EOG Resources, Inc.
ADDRESS: P.O. BOX 250
BIG PINEY, WYOMING 83113

OPERATOR ACCT. NO. N 9550
FAX: JIM THOMPSON
(801) 359-3940

ENTITY ACTION FORM - FORM 6

F-694 P.01/01 T-870 3072763935 3072763935 From-EOG - B Big Piney, WY. Apr-30-03 01:57pm

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	LOCATION				COUNTY	SPUD DATE	EFFECTIVE DATE
					QQ	SEC.	TP	RG			
A	99999	13754	43-047-34640	NATURAL COTTON 44-17	SE/SE	17	9S	21E	UINTAH	3/22/2003	4/4/03
<i>not in unit formation for Natural Buttes</i>											
CONFIDENTIAL											
A	99999	13763	43-047-34583	NATURAL COTTON 14-7	SESW	7	8S	21E	UINTAH	4/102/2003	
CONFIDENTIAL											
A	99999	13762	43-047-34847	NORTH DUCK CREEK 203-28	NENE	28	8S	21E	UINTAH	3/29/2003	
CONFIDENTIAL											

DTS

ACTIONS CODES (See instructions on back of form)

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

Steve Parker

Signature
Regulatory Analyst

Title

Date
4/14/2003

Phone No. (307) 276-4842

(3/89)

RECEIVED
APR 30 2003

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: November 30, 2000

009

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5. Lease Serial No.
U 0803

1a. Type of Well Oil Well Gas Well Dry Other
b. Type of Completion New Well Work Over Deepen Plug Back Diff. Resvr.
Other _____

CONFIDENTIAL

6. If Indian, Allottee or Tribe Name

7. Unit or CA Agreement Name and No.

2. Name of Operator EOG RESOURCES, INC. Contact: KATY CARLSON
E-Mail: Kathleen_Carlson@EOGResources.com

8. Lease Name and Well No.
NORTH DUCK CREEK 203-28

3. Address P.O. BOX 250
BIG PINEY, WY 83113

3a. Phone No. (include area code)
Ph: 307.276.4842

9. API Well No.
43-047-34847

4. Location of Well (Report location clearly and in accordance with Federal requirements)*

At surface NENE 667FNL 665FEL 40.09967 N Lat, 109.55182 W Lon

At top prod interval reported below NENE 667FNL 665FEL 40.09967 N Lat, 109.55182 W Lon

At total depth NENE 667FNL 665FEL 40.09967 N Lat, 109.55182 W Lon

10. Field and Pool, or Exploratory
NORTH DUCK CREEK/WASATCH

11. Sec., T., R., M., or Block and Survey
or Area Sec 28 T8S R21E Mer SLB

12. County or Parish
UINTAH

13. State
UT

14. Date Spudded
03/29/2003

15. Date T.D. Reached
04/16/2003

16. Date Completed
 D & A Ready to Prod.
05/06/2003

17. Elevations (DF, KB, RT, GL)*
4771 GL

18. Total Depth: MD 7920
TVD

19. Plug Back T.D.: MD 7895
TVD

20. Depth Bridge Plug Set: MD
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
RST & CBL/VDL/GR/CCL

22. Was well cored? No Yes (Submit analysis)
Was DST run? No Yes (Submit analysis)
Directional Survey? No Yes (Submit analysis)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
			0						
			0						
			0						
12.250	9.625 J-55	36.0	0	509		275			
7.875	4.500 J-55	11.5	0	7920		1170			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2.375	7645							

25. Producing Intervals

26. Perforation Record

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) WASATCH	6872	7635	7542 TO 7635	0.380	16	PRODUCING
B)			7343 TO 7422	0.380	21	PRODUCING
C)			7128 TO 7234	0.380	22	PRODUCING
D)			6872 TO 7002	0.380	24	PRODUCING

27. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Depth Interval	Amount and Type of Material
7542 TO 7635	22,320 GALS GELLED WATER & 76,298# 20/40 SAND
7343 TO 7422	18,037 GALS GELLED WATER & 53,695# 20/40 SAND.
7128 TO 7234	17,914 GALS GELLED WATER & 82,429# 20/40 SAND.
6872 TO 7002	18,134 GALS GELLED WATER & 84,689# 20/40 SAND.

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
05/06/2003	05/12/2003	24	→	0.0	840.0	20.0			FLOWS FROM WELL
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
12/64	1140	1340.0	→	0	840	20		PGW	

CONFIDENTIAL

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						EXPIRED ON 6-6-04
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
	SI		→						

(See Instructions and spaces for additional data on reverse side)

ELECTRONIC SUBMISSION #21691 VERIFIED BY THE BLM WELL INFORMATION SYSTEM

** DRAFT **

RECEIVED

MAY 27 2003

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

29. Disposition of Gas(Sold, used for fuel, vented, etc.)
SOLD

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
GREEN RIVER	2253	5406	SHALE	WASATCH	5826
M MARKER	5406	5830	SHALE	CHAPITA WELLS	6483
WASATCH	5830	6516	SANDSTONE	BUCK CANYON	7173
CHAPITA WELLS	6516	7417	SANDSTONE		
BUCK CANYON	7417	7900	SANDSTONE		

32. Additional remarks (include plugging procedure):

33. Circle enclosed attachments:

- 1. Electrical/Mechanical Logs (1 full set req'd.)
- 2. Geologic Report
- 3. DST Report
- 4. Directional Survey
- 5. Sundry Notice for plugging and cement verification
- 6. Core Analysis
- 7 Other:

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions):

Electronic Submission #21691 Verified by the BLM Well Information System.
For EOG RESOURCES, INC., will be sent to the Vernal

Name (please print) KATY CARLSON Title REGULATORY ANALYST

Signature (Electronic Submission) *Katy Carlson* Date 05/20/2003

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
U-0803

6. If Indian, Allottee or Tribe Name
UTE INDIAN TRIBE

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
NORTH DUCK CREEK 203-28

9. API Well No.
43-047-34847

10. Field and Pool, or Exploratory
NORTH DUCK CREEK WASATCH

11. County or Parish, and State
UINTAH COUNTY, UT

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

CONFIDENTIAL

2. Name of Operator
EOG RESOURCES, INC. Contact: ALFREDA SCHULZ
E-Mail: alfreda_schulz@eogresources.com

3a. Address
P.O. BOX 250
BIG PINEY, WY 83113

3b. Phone No. (include area code)
Ph: 307.276.4833

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Sec 28 T8S R21E NENE 667FNL 665FEL
40.09967 N Lat, 109.55182 W Lon

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input checked="" type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. continued the completion of additional pay in the Wasatch/Chapita Wells formation of the referenced well as follows:

- Set composite bridge plug 6800'. Perforated Cc & Cd formation from 6707-10', 6712-14', 6728-30', 6735-37' @ 3 SPF. Fracture stimulated w/376 bbls gelled water & 63,550# 20/40 sand.
- Perforated Ph and Ca formation from 6444-50', 6549-51', 6563-66', 6576-79' @ 2 SPF. Set composite frac plug @ 6630' Fracture stimulated w/442 bbls gelled water & 80,940# 20/40 sand.
- Perforated Pf formation from 6249-53', 6288-90', 6322-26', 6328-30' w/2 SPF. Set composite frac plug @ 6370'. Fracture stimulated w/406 bbls gelled water & 81,590# 20/40 sand. Drilled out composite frac plugs. Landed tubing @ 7645'.
- Returned well to sales @ 10:30 a.m. 1/26/2004 through Questar Meter #5850.

TEST: 1/28/2004, 588 MCFD, 3 BC, 23 BW in 24 hours on a 12/64" choke, FTP 900 psig, CP 1175 psig.

14. I hereby certify that the foregoing is true and correct.
Electronic Submission #26734 verified by the BLM Well Information System
For EOG RESOURCES, INC., sent to the Vernal

Name (Printed/Typed) ALFREDA SCHULZ Title SR. REGULATORY ASSISTANT

Signature (Electronic Submission) Date 01/29/2004

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED**

RECEIVED

FEB 24 2004

DIV. OF OIL, GAS & MINING

010

XC: T Miller - Den E Bro
T Wyszynski J Lewin
Prod B Page
FORM APPROVED
OMB NO. 1004-0135 BIA/B
Expires: November 30, 2000 RGT
GMSB