

# RIG SKID

Form 3160-3  
(August 1999)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0136  
Expires November 30, 2000

001

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER <b>RIG SKID</b>		5. Lease Serial No. U-33433
b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator Westport Oil & Gas Company, L.P.		7. If Unit or CA Agreement, Name and No.
3A. Address P.O. Box 1148 Vernal, UT 84078		8. Lease Name and Well No. Southman Canyon 31-2X
3b. Phone No. (include area code) (435) 781-7023		9. API Well No. 43-047-34898
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NWNW 733' FNL, 836' FWL 4428564 Y 39.99777 At proposed prod. Zone 638682 X -109.37546		10. Field and Pool, or Exploratory Natural Gas Bonanza
14. Distance in miles and direction from nearest town or post office* 21.9 Miles Southeast of Ouray, UT		11. Sec., T., R., M., or Blk. and Survey or Area Sec. 31, T9S, R23E
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1310'	16. No. of Acres in lease 1922	17. Spacing Unit dedicated to this well 77.96
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Refer to Topo C	19. Proposed Depth 8500'	20. BLM/BIA Bond No. on file CO 1203
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5119' GL	22. Approximate date work will start* Immediate	23. Estimated duration 10 Days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- |  |   |
|--|---|
| 1. Well plat certified by a registered surveyor.   | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).   |
| 2. A Drilling Plan.  | 5. Operator certification.  |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office. | 6. Such other site specific information and/or plans as may be required by the authorized office. |

25. Signature 	Name (Printed/Typed) Cheryl Cameron	Date 3/27/2003
Title Operations	<b>Federal Approval of this Action is Necessary</b>	
Approved by (Signature) 		
Title Operations	Name (Printed/Typed) BRADLEY G. HILL	Date 040703
	Office ENVIRONMENTAL SCIENTIST III	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on reverse)

RECEIVED

MAR 28 2003

DIV. OF OIL, GAS & MINING


T9S, R23E, S.L.B.&M.

EL PASO PRODUCTION OIL & GAS COMPANY


Well location, SOUTHMAN CANYON #31-2,x located as shown in the NW 1/4 NW 1/4 of Section 31, T9S, R23E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MOUNTAIN NE QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

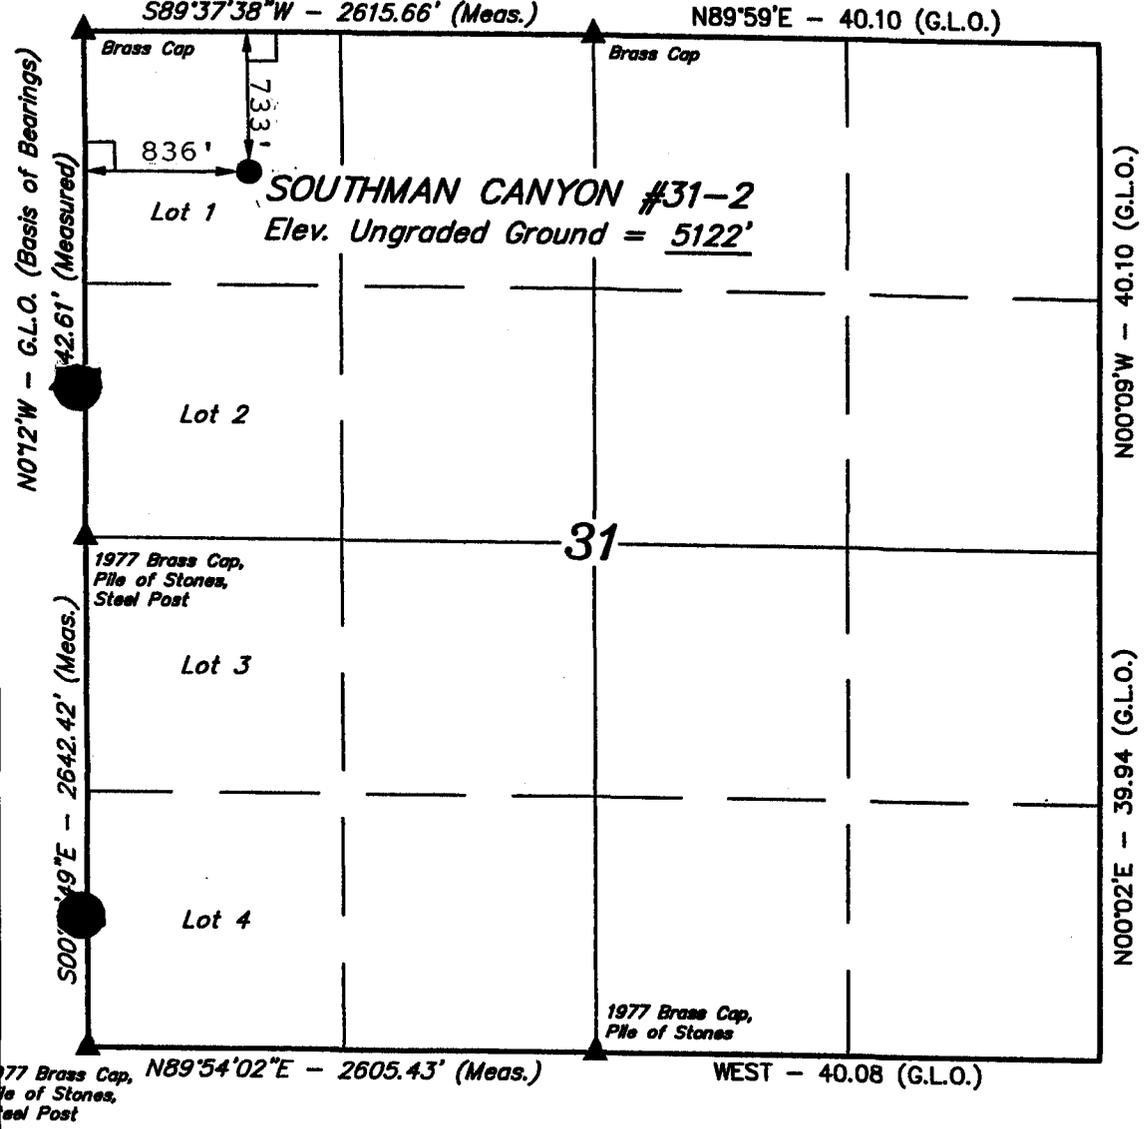

RECEIVED  
MAR 28 2003  
DIV. OF OIL, GAS & MINING



CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

NO 16819  
ROBERT L. ...  
REGISTERED LAND SURVEYOR  
REGISTRATION NO. 181318  
STATE OF UTAH

REVISED: 8-19-02

<b>UINTAH ENGINEERING &amp; LAND SURVEYING</b> 85 SOUTH 200 EAST - VERNAL, UTAH 84078 (435) 789-1017		
SCALE 1" = 1000'	DATE SURVEYED: 1-12-01	DATE DRAWN: 2-2-01
PARTY B.B. J.W. C.G.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE EL PASO PRODUCTION OIL & GAS COMPANY	

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

LATITUDE = 39°59'52"  
LONGITUDE = 109°22'31"

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

002

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.  
**UTU-33433**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.  
**Southman Canyon 31-2X**

9. API Well No.

10. Field and Pool, or Exploratory Area  
**Bonanza Natural Buttes**

11. County or Parish, State  
**Uintah, UT**

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other  
**RIG SKID**

2. Name of Operator  
**WESTPORT OIL & GAS COMPANY, L.P.**

3a. Address  
**P.O. BOX 1148 VERNAL, UT 84078**

3b. Phone No. (include area code)  
**(435) 781-7023**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

**NWNW LOT 1, 733' FNL, 836' FWL  
Sec. 31, T9S, R23E**

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other
			<b>Rig Skid</b>

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomplate in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

The footages for the subject well have been changed from 731'FNL, 832' FWL to 733' FNL, 836' FWL, due to a RIG SKID. The new well number for this location is now the Southman Canyon 31-2X. A new Location Plat and Drilling Program is attached.

The Southman Canyon 31-2 is proposed to be plugged on 3/31/03. The 9 5/8" csg shall be filled from top to bottom with approximately 160 sx Class G cmt.

14. I hereby certify that the foregoing is true and correct


Name (Printed/Typed)

**Cheryl Cameron**

Title

**Operations**

Signature



Date

**March 27, 2003**

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED

MAR 28 2003

DIV. OF OIL, GAS & MINING



# T9S, R23E, S.L.B.&M.

## EL PASO PRODUCTION OIL & GAS COMPANY

Well location, SOUTHMAN CANYON #31-2,  
located as shown in the NW 1/4 NW 1/4  
of Section 31, T9S, R23E, S.L.B.&M.  
Uintah County, Utah.


### BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION IN THE NW 1/4  
OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM  
THE BIG PACK MOUNTAIN NE QUADRANGLE, UTAH, UTAH  
COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP)  
PUBLISHED BY THE UNITED STATES DEPARTMENT OF  
THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION  
IS MARKED AS BEING 5238 FEET.

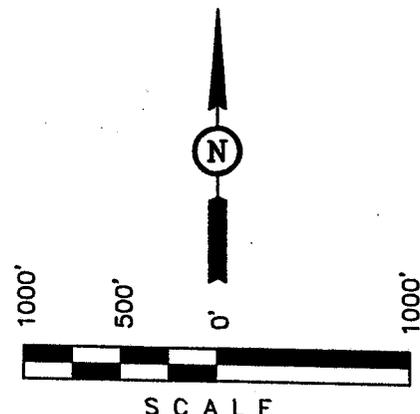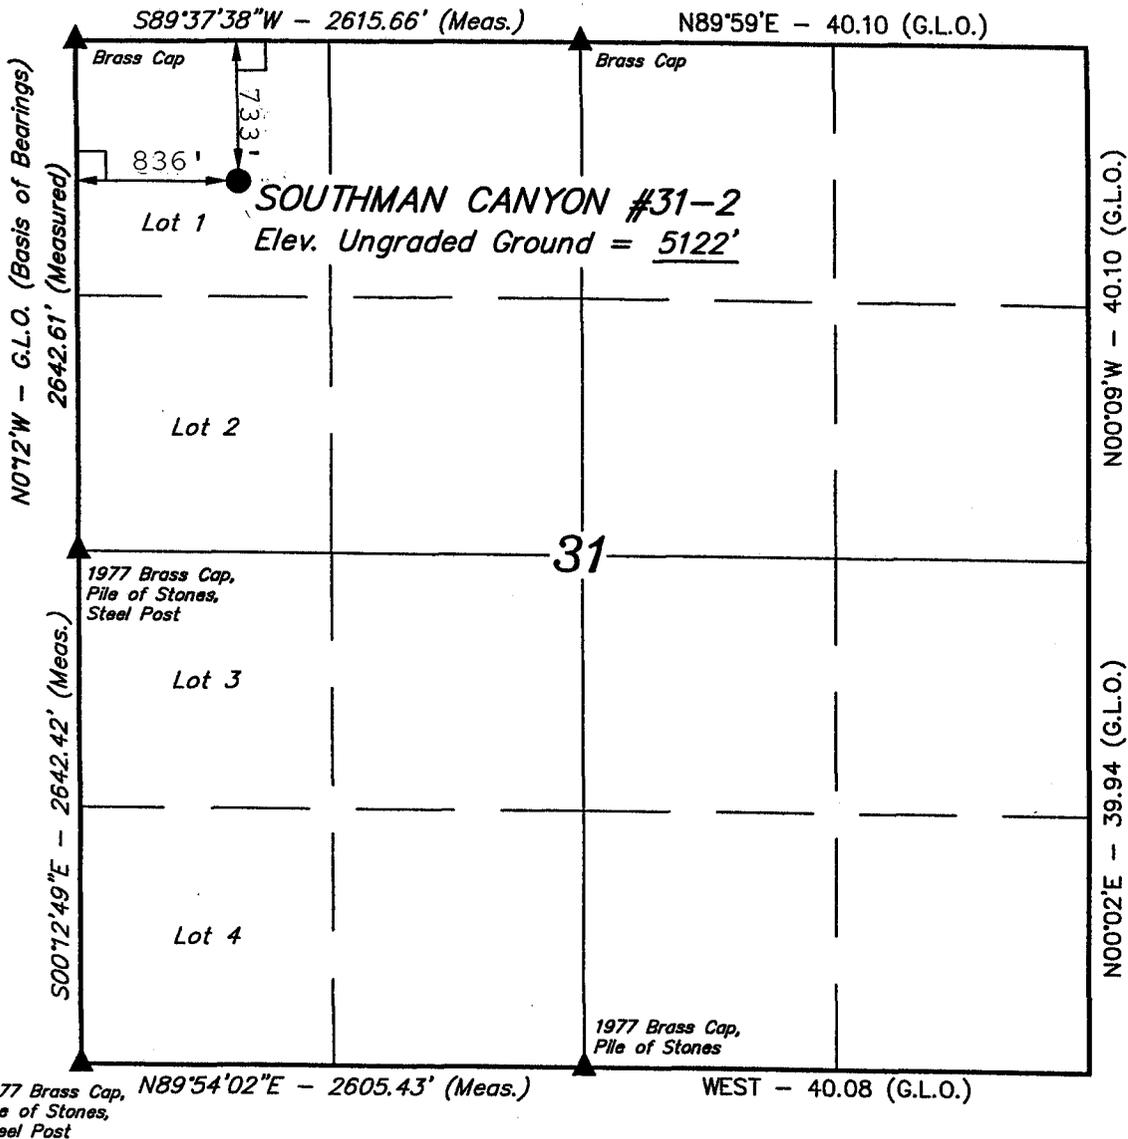

### CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM  
FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY  
SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE  
BEST OF MY KNOWLEDGE AND BELIEF.



REVISED: 8-19-02

**UINTAH ENGINEERING & LAND SURVEYING**  
 85 SOUTH 200 EAST - VERNAL, UTAH 84078  
 (435) 789-1017

RECEIVED

MAR 28 2003

### LEGEND:

- = 90° SYMBOL
- = PROPOSED WELL HEAD.
- = SECTION CORNERS LOCATED.

LATITUDE =  $39^{\circ}59'52''$   
 LONGITUDE =  $109^{\circ}22'31''$

DIV. OF OIL, GAS & MINING


SCALE 1" = 1000'	DATE SURVEYED: 1-12-01	DATE DRAWN: 2-2-01
PARTY B.B. J.W. C.G.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE EL PASO PRODUCTION OIL & GAS COMPANY	



Westport Oil and Gas Company, L.P.

**DRILLING PROGRAM**

COMPANY NAME Westport Resources Corp. DATE March 26, 2003  
 WELL NAME Southman Canyon 31-2X TD 8,500' MD/TVD \_\_\_\_\_  
 FIELD Bonanza COUNTY Uintah STATE Utah ELEVATION 5,095' KB \_\_\_\_\_  
 SURFACE LOCATION 733' FNL, 836' FWL, NW/NW, SEC. 31, T9S, R23E BHL Straight Hole  
 OBJECTIVE ZONE(S) Wasatch, Mesa Verde  
 ADDITIONAL INFO Regulatory Agencies: BLM, UDOGM, Tri-County Health Dept.

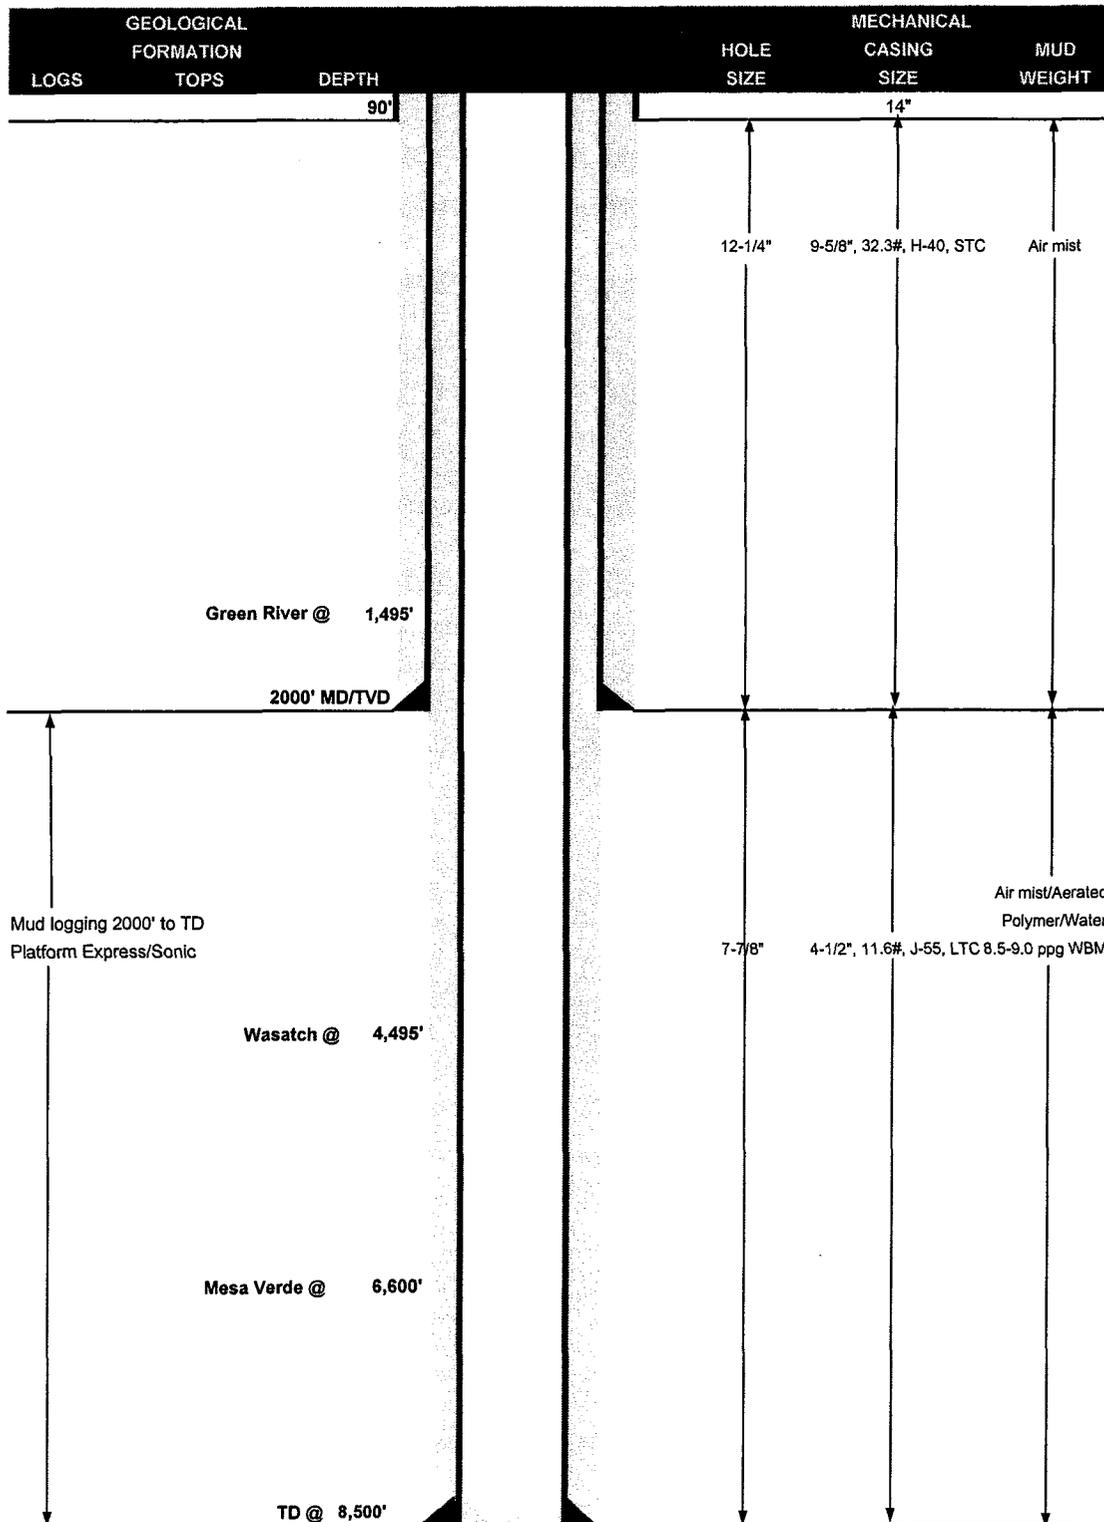



# DRILLING PROGRAM

## CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'				2270	1370	254000
SURFACE	9-5/8"	0-2000'	32.30	H-40	STC	2.02	1.46	2.08
PRODUCTION	4-1/2"	0-TD	11.60	J-55	LTC	1.78	1.12	1.09

- 1) Maximum Anticipated Surface Pressure (MASP) (Conductor and Surface Casings) = (Frac Gradient at Shoe - Gas Gradient (0.115 psi/ft))(TVD)
  - 2) MASP (Int Casing) = Pore Pressure at Next Casing Point - (Gas Gradient x TVD of Next Casing Point x 0.67) - (Mud Weight x TVD x 0.052 x 0.33)
  - 3) MASP (Prod Casing) = Pore Pressure - (Gas Gradient x TVD of Production Interval)
- (Burst Assumptions: FG @ 9-5/8" shoe = 13.0 ppg, Max Pore Pressure = 9.0 ppg EMW)  
(Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing, 50000 lbs overpull)

## CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS*	WEIGHT	YIELD
SURFACE	STAGE 1	550	Class G + 2% CaCl <sub>2</sub> + 0.25 pps celloflake	220	35%	15.80	1.16
	DV TOOL AT 1400'						
	STAGE 2	1400	Class G + 2% CaCl <sub>2</sub> + 0.25 pps celloflake	760	100%	15.80	1.16
PRODUCTION	LEAD	3,990'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	450	70%	11.00	3.38
	TAIL	4,510'	50/50 Poz/G + 10% salt + 2% gel	1340	70%	14.30	1.31

\*Substitute caliper hole volume plus 15% excess if accurate caliper is obtained

## FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

## ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 3M with one annular and 2 rams. Test to 3,000 psi (annular to 1,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.

Drop Totco surveys on bit trips. Maximum allowable hole angle is 5 degrees.

DRILLING ENGINEER: \_\_\_\_\_  
Dan Lindsey

DATE: \_\_\_\_\_

DRILLING ENGINEER: \_\_\_\_\_  
Brad Laney

DATE: \_\_\_\_\_

SOUTHMAN CANYON 31-2 X  
 NW/NW Sec. 31, T9S, R23E  
 UTAH COUNTY, UTAH  
 U-33433

ONSHORE ORDER NO. 1

***DRILLING PROGRAM***

1. **Geologic Surface Formation:**

<u>Formation</u>	<u>Depth</u>
KB	5095'
Green River	1495'
Wasatch	4495'

2. **Estimated Tops/Depths of Important Geologic Markers/Anticipated Gas:**

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
	KB	5095'
Gas	Green River	1495'
Gas	Wasatch	4495'
	TD	8500'

3. **Pressure Control Equipment** (Schematic Attached)

The BOP stack will consist of one 11" 3,000 psi annular BOP, one 11" 3,000 psi double ram, and one 11' drilling spool. The lower ram will contain pipe rams, and the upper ram will contain blind rams.

The choke and kill lines and the choke manifold will have a 3,000 psi minimum pressure rating.

The hydrill will be tested to 1,500 psi. The rams, choke manifold, kelly safety valves, drill string safety valves, and inside BOP will be tested to 3,000 psi.

4. **Proposed Casing & Cementing Program:**

The Surface casing and the Production casing will be new.

Please refer to the attached Casing & Cementing Program.

5. **Drilling Fluids Program:**

Please refer to the attached Drilling Fluids Program

6. **Evaluation Program:** (Logging)

Please refer to the attached Drilling Program.

7. **Abnormal Conditions:**

Maximum anticipated bottomhole pressure calculated @ 8,500' TD approximately equals 3,400 psi (calculated at 0.4 psi/foot). Maximum anticipated surface pressure equals approximately 1,530 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. **Anticipated Starting Dates:**

Drilling is planned to commence immediately upon approval of this application.

9. **Variations:**

None anticipated.

10. **Other:**

A Class III Archaeological Study Report prepared by AERC is on file with the Bureau of Land Management. The Paleontological Survey conducted by Uintah Paleo shall be submitted, as soon as it becomes available.

SOUTHMAN CANYON 31-2 X  
NW/NW SEC. 31, T9S, R23E  
UINTAH COUNTY, UTAH  
U-33433

ONSHORE ORDER NO. 1

*MULTI-POINT SURFACE USE & OPERATIONS PLAN*

1. **Existing Roads:**

Directions to the proposed location is attached.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

2. **Planned Access Roads:**

The proposed access road is approximately 0.3 miles. The off-lease portion of ROW in Sec. 36 shall be applied for through SITLA. Refer to Topo Map B.

The access road will be crowned (2 to 3%), ditched and constructed with a running surface of 18 feet and a maximum disturbed width of 30 feet. Graveling or capping the roadbed will be performed as necessary to provide a well constructed, safe road. Prior to construction or upgrading, the proposed road shall be cleared of any snow and allowed to dry completely.

Surface disturbance and vehicular traffic will be limited to the proposed location and proposed access route. Any additional area needed will be approved in advance. All construction shall be in conformance with the standards outlined in the BLM and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development. 1989.

The road surface and shoulders will be kept in a safe and usable condition and will be maintained in accordance with the original construction standards. All drainage ditches will be kept clear and free-flowing and will be maintained according to original construction standards. The access road surface will be kept free of trash during operations. All traffic will be confined to the approved disturbed surface. Road drainage crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing or shall the drainages be blocked by the road bed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Should mud holes develop, they shall be filled in and detours around them avoided. When snow is removed from the road during the winter months, the snow shall be pushed outside of the borrow ditches, and the turnouts kept clear so that snowmelt will be channeled away from the road.

3. **Location of Existing Wells Within a 1-Mile Radius**

Please refer to Topo Map C.

4. **Location of Existing & Proposed Facilities**

*The following guidelines will apply if the well is productive.*

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The requested color is Carlsbad Canyon (2.5 Y 6/2) as determined during the on-site inspection.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

The proposed pipeline is approximately 1,700' and will tie into the proposed pipeline from the 31-3, running southeasterly. Refer to Topo Map D.

**5. Location and Type of Water Supply:**

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec.32, T4S,R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

**6. Source of Construction Materials**

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

**7. Methods of Handling Waste Materials**

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge

of liquids.

A plastic reinforced liner with felt is to be used as discussed during on-site inspection. It will be a minimum of 12 mil thick, with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Contractors should take caution to direct blast in the pit around edges of ledge to avoid fracturing rock.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

*Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec. 35, T9S, R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E. (Request is in lieu of filing Form 3160-5, after initial production).*

**8. Ancillary Facilities**

None are anticipated.

**9. Well Site Layout: (See Location Layout Diagram)**

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

The net wire shall be no more than two inches above the ground. The barbed wire shall be

three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

***Byron Tolman, Bureau of Land Management, shall be contacted prior to location construction; a sentiment catch basin shall be constructed below location, as discussed during the on-site inspection. Refer to Topo Map B.***

**10. Plans for Reclamation of the Surface:**

*Producing Location:*

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water (s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling, and recontouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

*Dry Hole/Abandoned Location:*

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations.

**The following seed mixture shall be used for reclamation:**

Black Sage	1 lb/acre
Shadscale	3 lb/acre
Crested Wheat Grass	4 lb/acre
Beardless Blue Brush	4 lb/acre

11. **Surface Ownership:**

Bureau of Land Management  
170 South 500 East  
Vernal, UT 84078  
(435) 789-1362

12. **Other Information:**

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance. The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

13. **Lessee's or Operators's Representative & Certification:**

Cheryl Cameron  
Regulatory Analyst  
El Paso Production O&G Co.  
P.O. Box 1148  
Vernal, UT 84078  
(435) 781-7023

Scott Palmer  
Drilling Manager  
El Paso Production O&G Co.  
9 Greenway Plaza  
Houston, TX 77046  
(713) 420-4850


Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

El Paso Production Oil & Gas Company is considered to be the operator of the subject well. El Paso Production Oil & Gas Company agrees to be responsible under the terms and the conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for the lease activities is being provided by BLM Nationwide Bond #WY3457.

I hereby certify that the proposed drill site and access route has been inspected and that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

  
\_\_\_\_\_  
Cheryl Cameron


9/17/02  
Date



# Westport Oil and Gas Company, L.P.

## DRILLING PROGRAM

COMPANY NAME Westport Resources Corp. DATE March 26, 2003  
 WELL NAME Southman Canyon 31-2X TD 8,500' MD/TVD  
 FIELD Bonanza COUNTY Uintah STATE Utah ELEVATION 5,095' KB  
 SURFACE LOCATION 733' FNL, 836' FWL, NW/NW, SEC. 31, T9S, R23E BHL Straight Hole  
 OBJECTIVE ZONE(S) Wasatch, Mesa Verde  
 ADDITIONAL INFO Regulatory Agencies: BLM, UDOGM, Tri-County Health Dept.

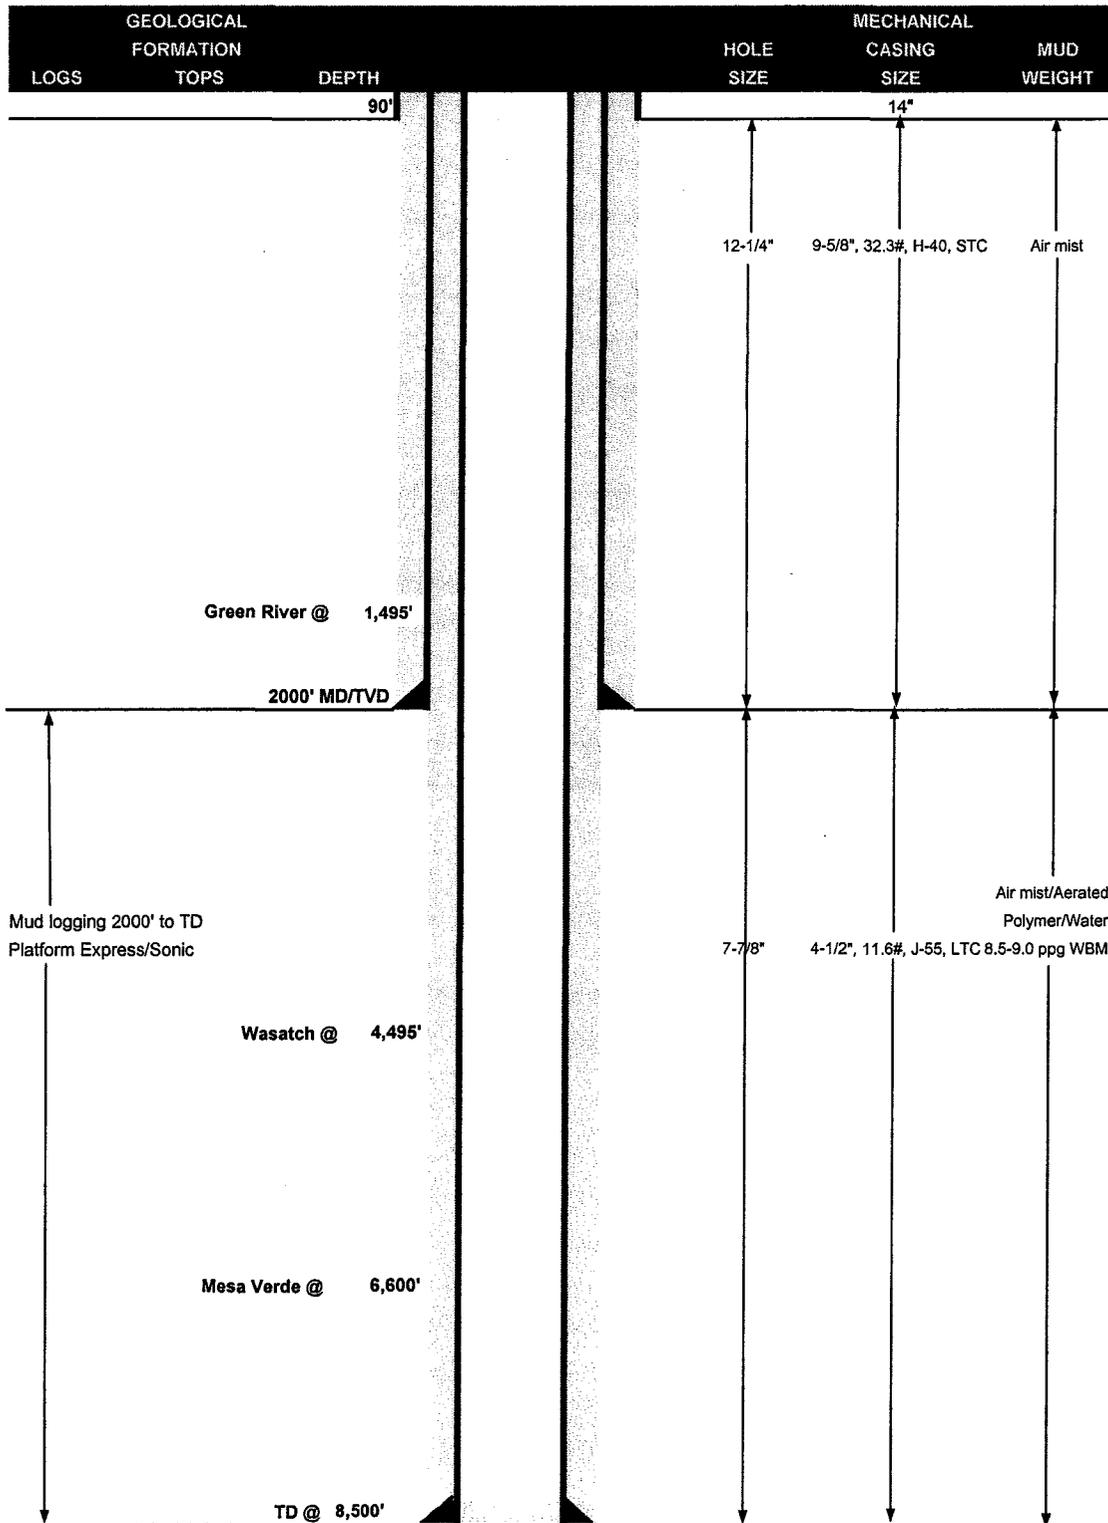



# DRILLING PROGRAM

## CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'				2270	1370	254000
SURFACE	9-5/8"	0-2000'	32.30	H-40	STC	2.02	1.46	2.08
PRODUCTION	4-1/2"	0-TD	11.60	J-55	LTC	1.78	1.12	1.09

- 1) Maximum Anticipated Surface Pressure (MASP) (Conductor and Surface Casings) = (Frac Gradient at Shoe - Gas Gradient (0.115 psi/ft))(TVD)
  - 2) MASP (Int Casing) = Pore Pressure at Next Casing Point - (Gas Gradient x TVD of Next Casing Point x 0.67) - (Mud Weight x TVD x 0.052 x 0.33)
  - 3) MASP (Prod Casing) = Pore Pressure - (Gas Gradient x TVD of Production Interval)
- (Burst Assumptions: FG @ 9-5/8" shoe = 13.0 ppg, Max Pore Pressure = 9.0 ppg EMW)  
(Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing, 50000 lbs overpull)

## CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS*	WEIGHT	YIELD
SURFACE	STAGE 1	550	Class G + 2% CaCl <sub>2</sub> + 0.25 pps celloflake	220	35%	15.80	1.16
	DV TOOL AT 1400'						
	STAGE 2	1400	Class G + 2% CaCl <sub>2</sub> + 0.25 pps celloflake	760	100%	15.80	1.16
PRODUCTION	LEAD	3,990'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	450	70%	11.00	3.38
	TAIL	4,510'	50/50 Poz/G + 10% salt + 2% gel	1340	70%	14.30	1.31

\*Substitute caliper hole volume plus 15% excess if accurate caliper is obtained

## FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

## ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 3M with one annular and 2 rams. Test to 3,000 psi (annular to 1,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.

Drop Totco surveys on bit trips. Maximum allowable hole angle is 5 degrees.

DRILLING ENGINEER: \_\_\_\_\_  
Dan Lindsey

DATE: \_\_\_\_\_

DRILLING ENGINEER: \_\_\_\_\_  
Brad Laney

DATE: \_\_\_\_\_

# COASTAL OIL & GAS CORP.

## SOUTHMAN CANYON #31-2X SECTION 31, T9S, R23E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 0.3 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN A EASTERLY DIRECTION APPROXIMATELY 12.6 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRCTION APPROXIMATELY 1.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 2.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN LEFT AND PROCEED IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 3.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN RIGHT AND PROCEED IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 0.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; STAY STRAIGHT AND PROCEED IN A SOUTHEASTELRY DIRECTION APPROXIMATELY 0.8 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE EAST; FOLLOW ROAD FLAGS IN A EASTERLY DIRECTION APPROXIMATELY 0.3 MILES TO THE PROPOSED LOCATION.

**EL PASO PRODUCTION OIL & GAS COMPANY**  
**SOUTHMAN CANYON #31-2X**  
 LOCATED IN UINTAH COUNTY, UTAH  
 SECTION 31, T9S, R23E, S.L.B.&M.

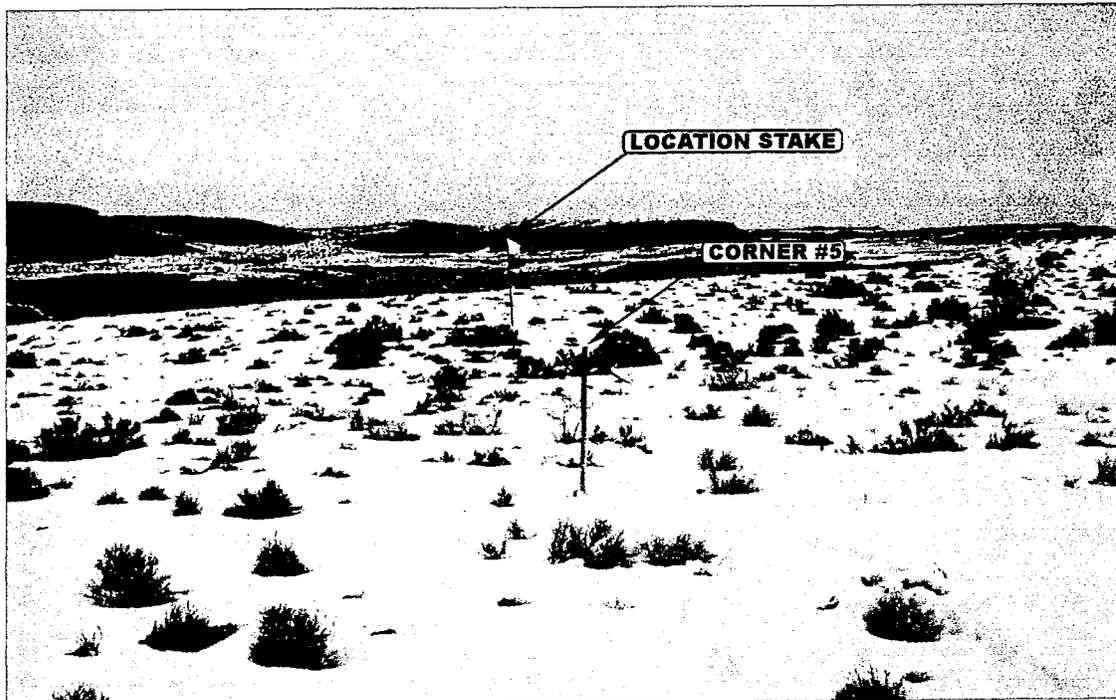


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHEASTERLY

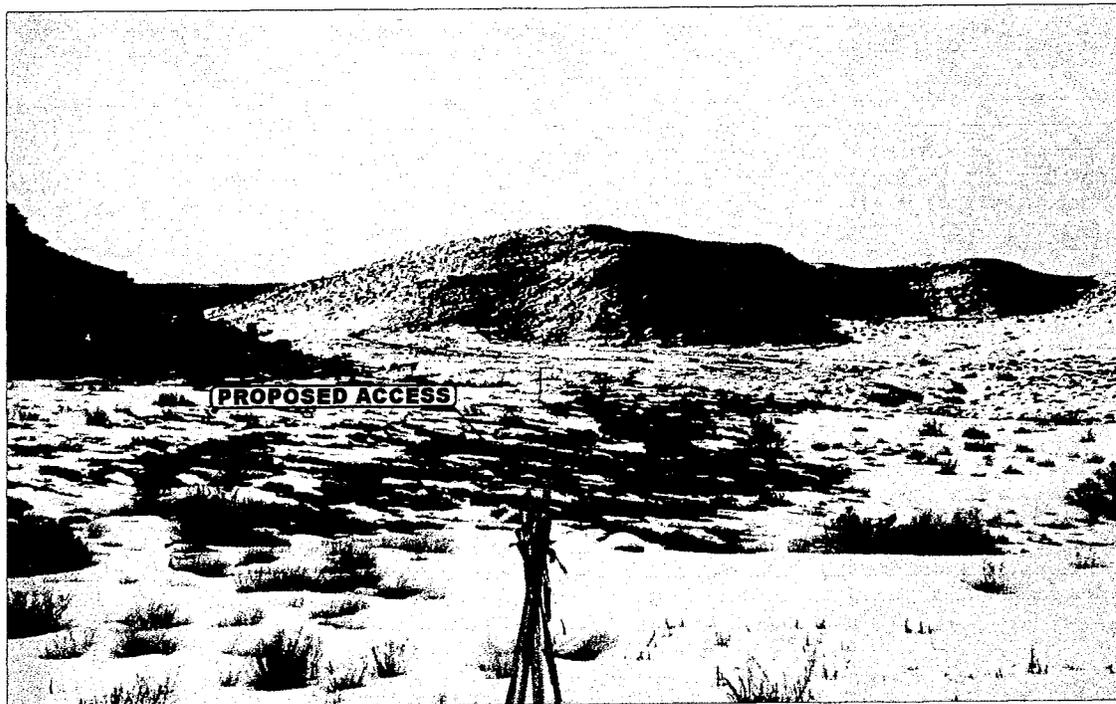


PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS


CAMERA ANGLE: EASTERLY




- Since 1964 -

**UELS** Uintah Engineering & Land Surveying  
 85 South 200 East Vernal, Utah 84078  
 435-789-1017 uels@uelsinc.com

LOCATION PHOTOS	2	7	01	PHOTO
	MONTH	DAY	YEAR	
TAKEN BY: B.B.	DRAWN BY: P.M.	REVISED: 8-19-02		

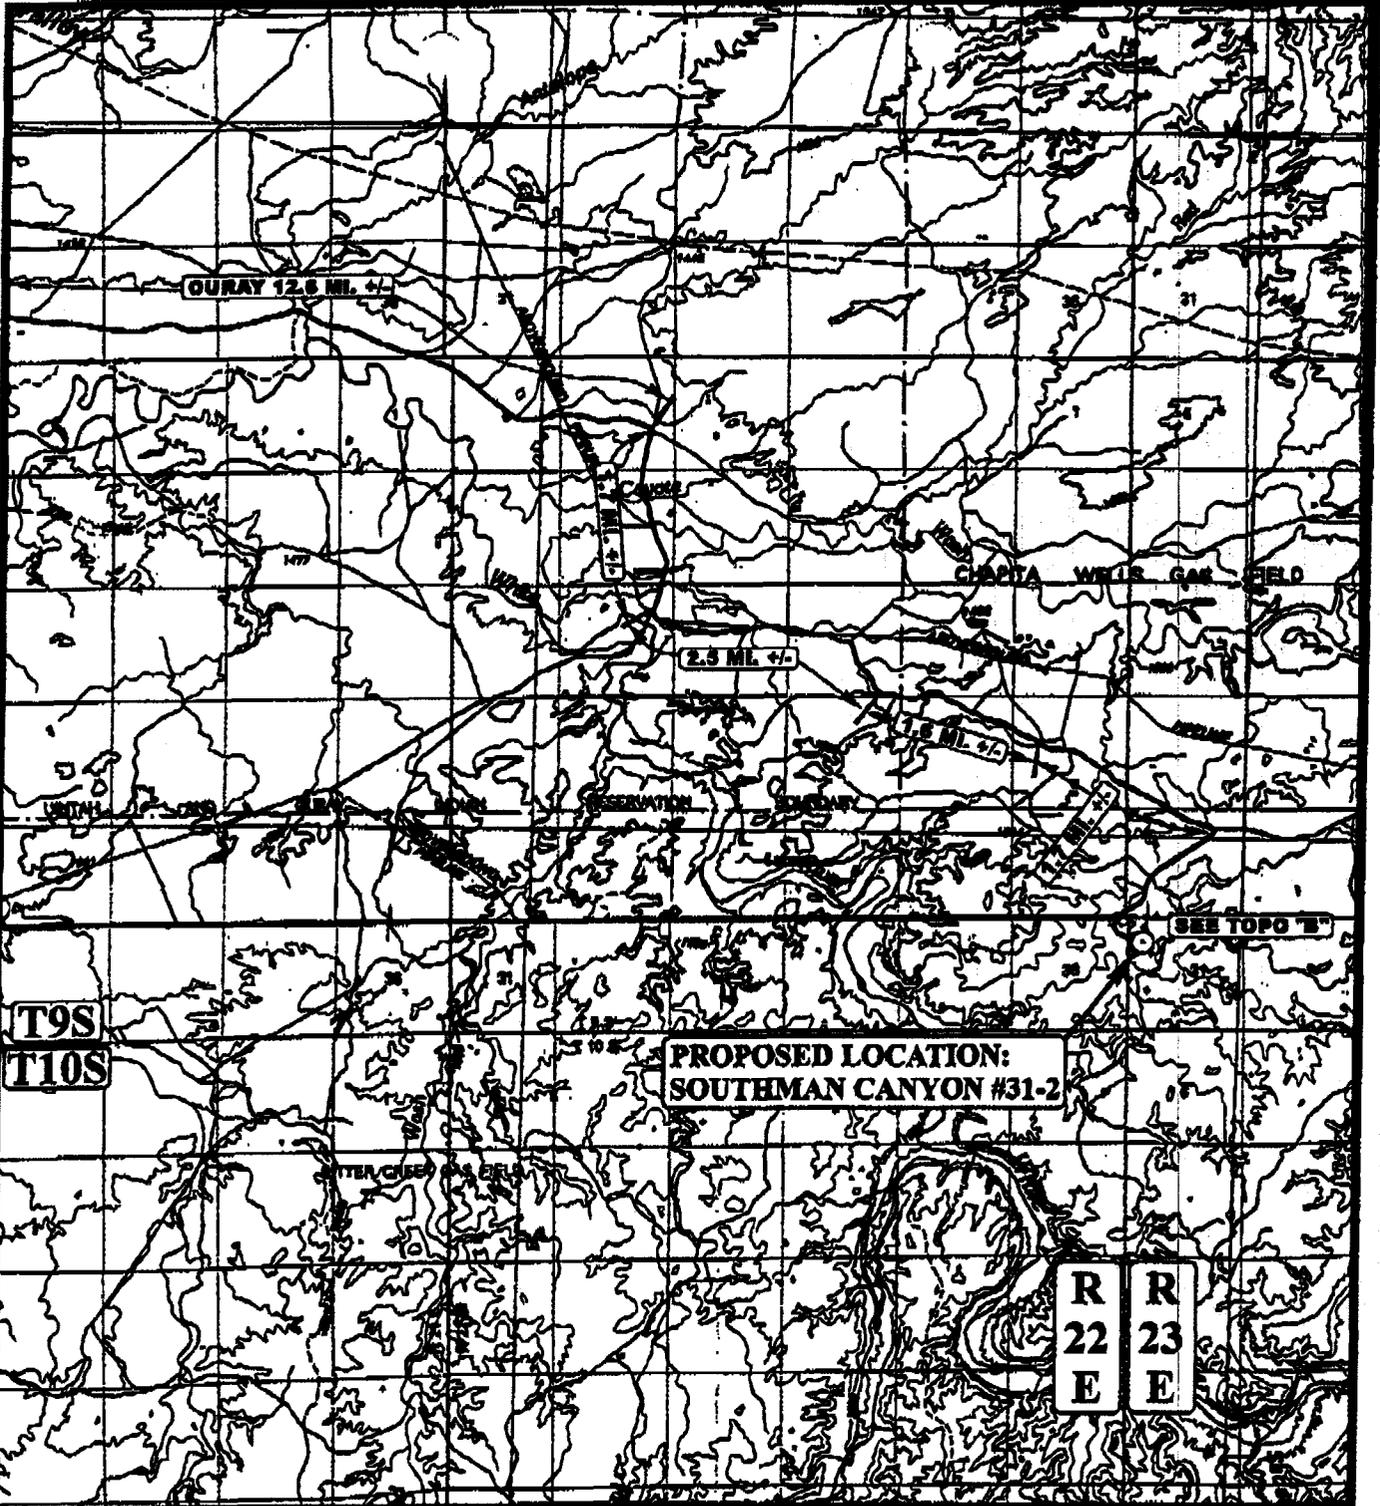

<b>LEGEND:</b>		<b>EL PASO PRODUCTION OIL &amp; GAS COMPANY</b>	
⊙	PROPOSED LOCATION	<b>SOUTHMAN CANYON #31-2X</b>	
		<b>SECTION 31, T9S, R23E, S.L.B.&amp;M.</b>	
		<b>733 FNL, 836 FWL</b>	
 <b>Uintah Engineering &amp; Land Surveying</b> 85 South 200 East Vernal, Utah 84078 (435) 789-1017 * FAX (435) 789-1813		<b>TOPOGRAPHIC</b> 2 7 01 <b>MAP</b> MONTH DAY YEAR SCALE: 1:100,000 DRAWN BY: P.M. REVISED: 8-19-02	

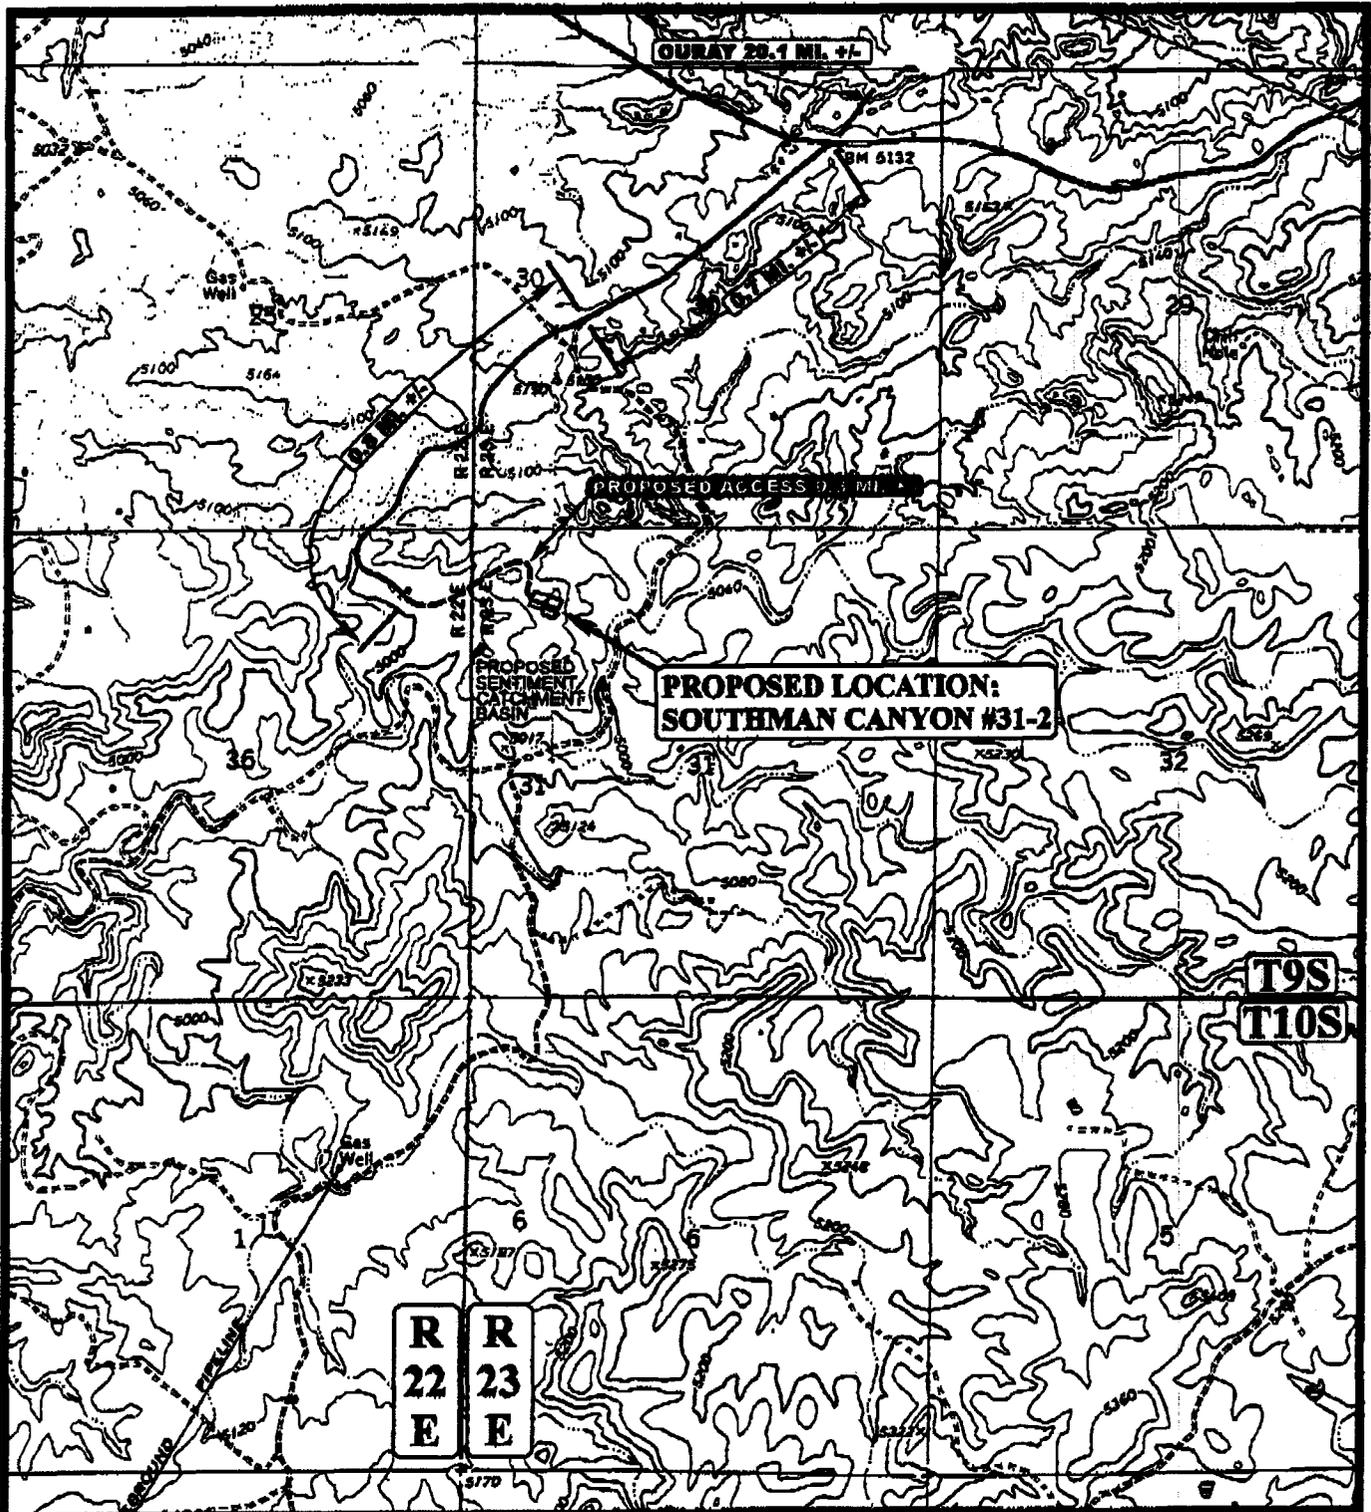

**LEGEND:**

- PROPOSED ACCESS ROAD
- EXISTING ROAD




**EL PASO PRODUCTION OIL & GAS COMPANY**  
**SOUTHMAN CANYON #31-2X**  
**SECTION 31, T9S, R23E, S.L.B.&M.**  
 733 FNL, 836 FWL



**Uintah Engineering & Land Surveying**  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC MAP**  
 2 7 01  
 MONTH DAY YEAR  
 SCALE: 1"=2000' | DRAWN BY: P.M. | REVISED: 5/02



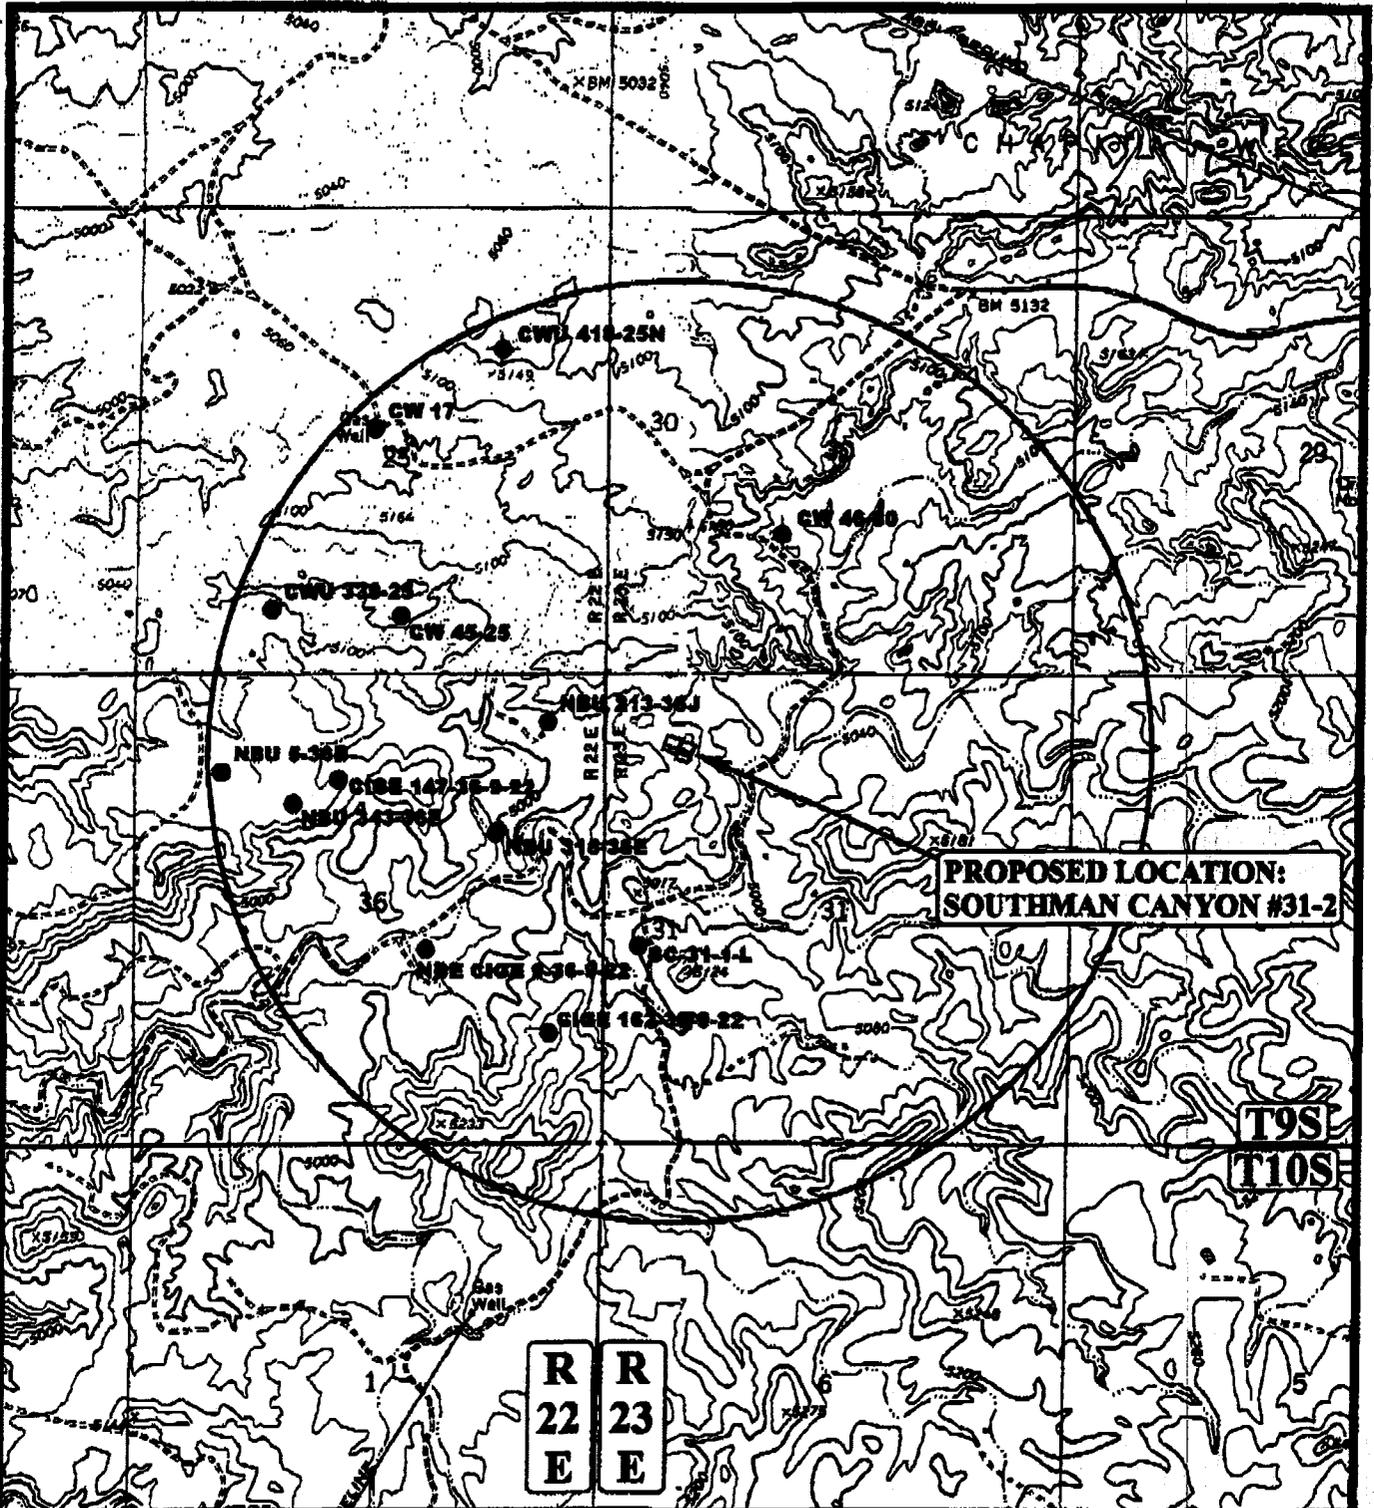

**LEGEND:**

- DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED

**EL PASO PRODUCTION OIL & GAS COMPANY**

**SOUTHMAN CANYON #31-2X**  
**SECTION 31, T9S, R23E, S.L.B.&M.**

733 FNL, 836 FWL




**Uintah Engineering & Land Surveying**  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 • FAX (435) 789-1813



**TOPOGRAPHIC MAP** 2 7 01  
 MONTH DAY YEAR  
 SCALE: 1" = 2000' DRAWN BY: P.M. | REVISED: 8-19-02



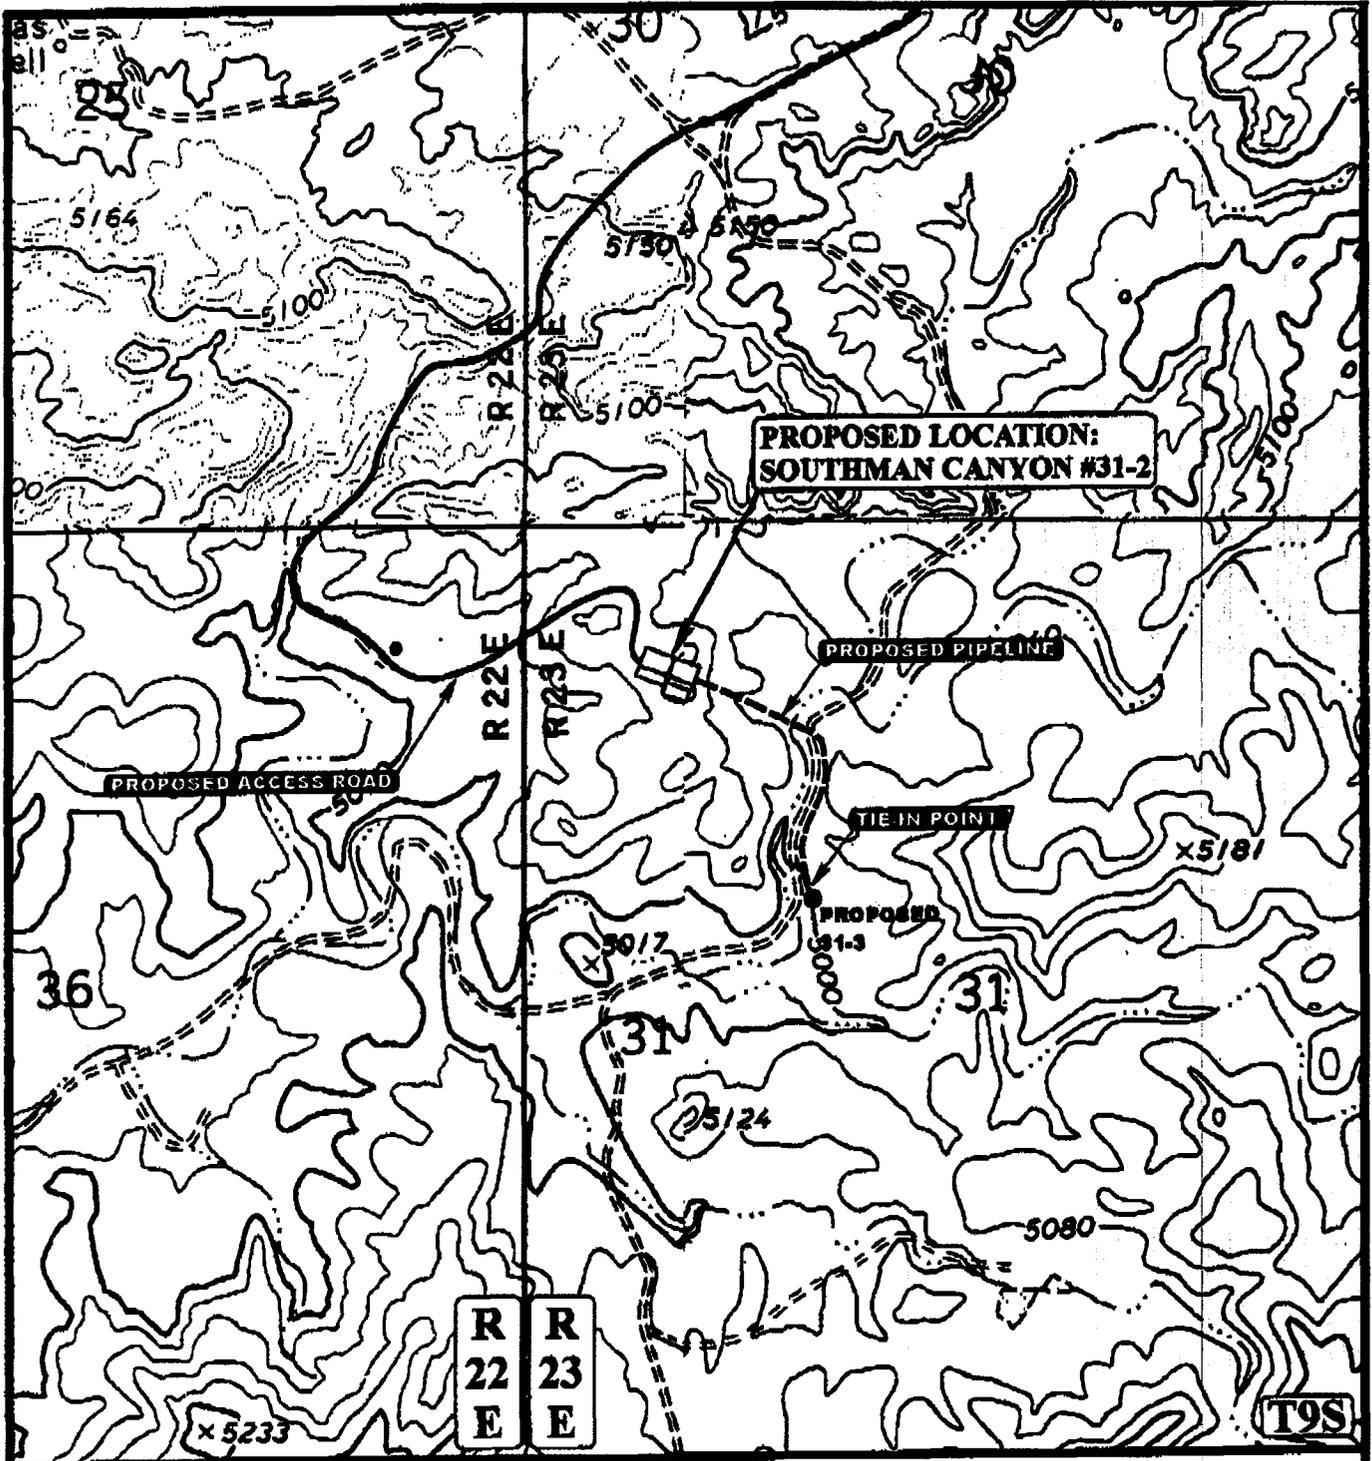

APPROXIMATE TOTAL PIPELINE DISTANCE = 1,700' +/-

**LEGEND:**

- EXISTING PIPELINE
- - - PROPOSED PIPELINE
- - - PROPOSED ACCESS

N



EL PASO PRODUCTION OIL & GAS COMPANY

SOUTHMAN CANYON #31-2X  
SECTION 31, T9S, R23E, S.L.B.&M.

733 FNL, 836 FWL



Utah Engineering & Land Surveying  
86 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813

TOPOGRAPHIC MAP


3	5	01
MONTH	DAY	YEAR

D  
TODD

SCALE: 1" = 1000' DRAWN BY: P.M. REVISED: 8-19-02


EL PASO PRODUCTION OIL & GAS COMPANY

LOCATION LAYOUT FOR  
 SOUTHMAN CANYON #31-2X  
 SECTION 31. T9S. R23E. S.L.B.&M.  
 733FWL, 836 FWL



SCALE: 1" = 50'  
 DATE: 2-2-01  
 Drawn By: C.G.  
 Revised: 8-19-02

NOTE:  
 Flare Pit is to be located  
 a min. of 100' from the  
 Well Head.

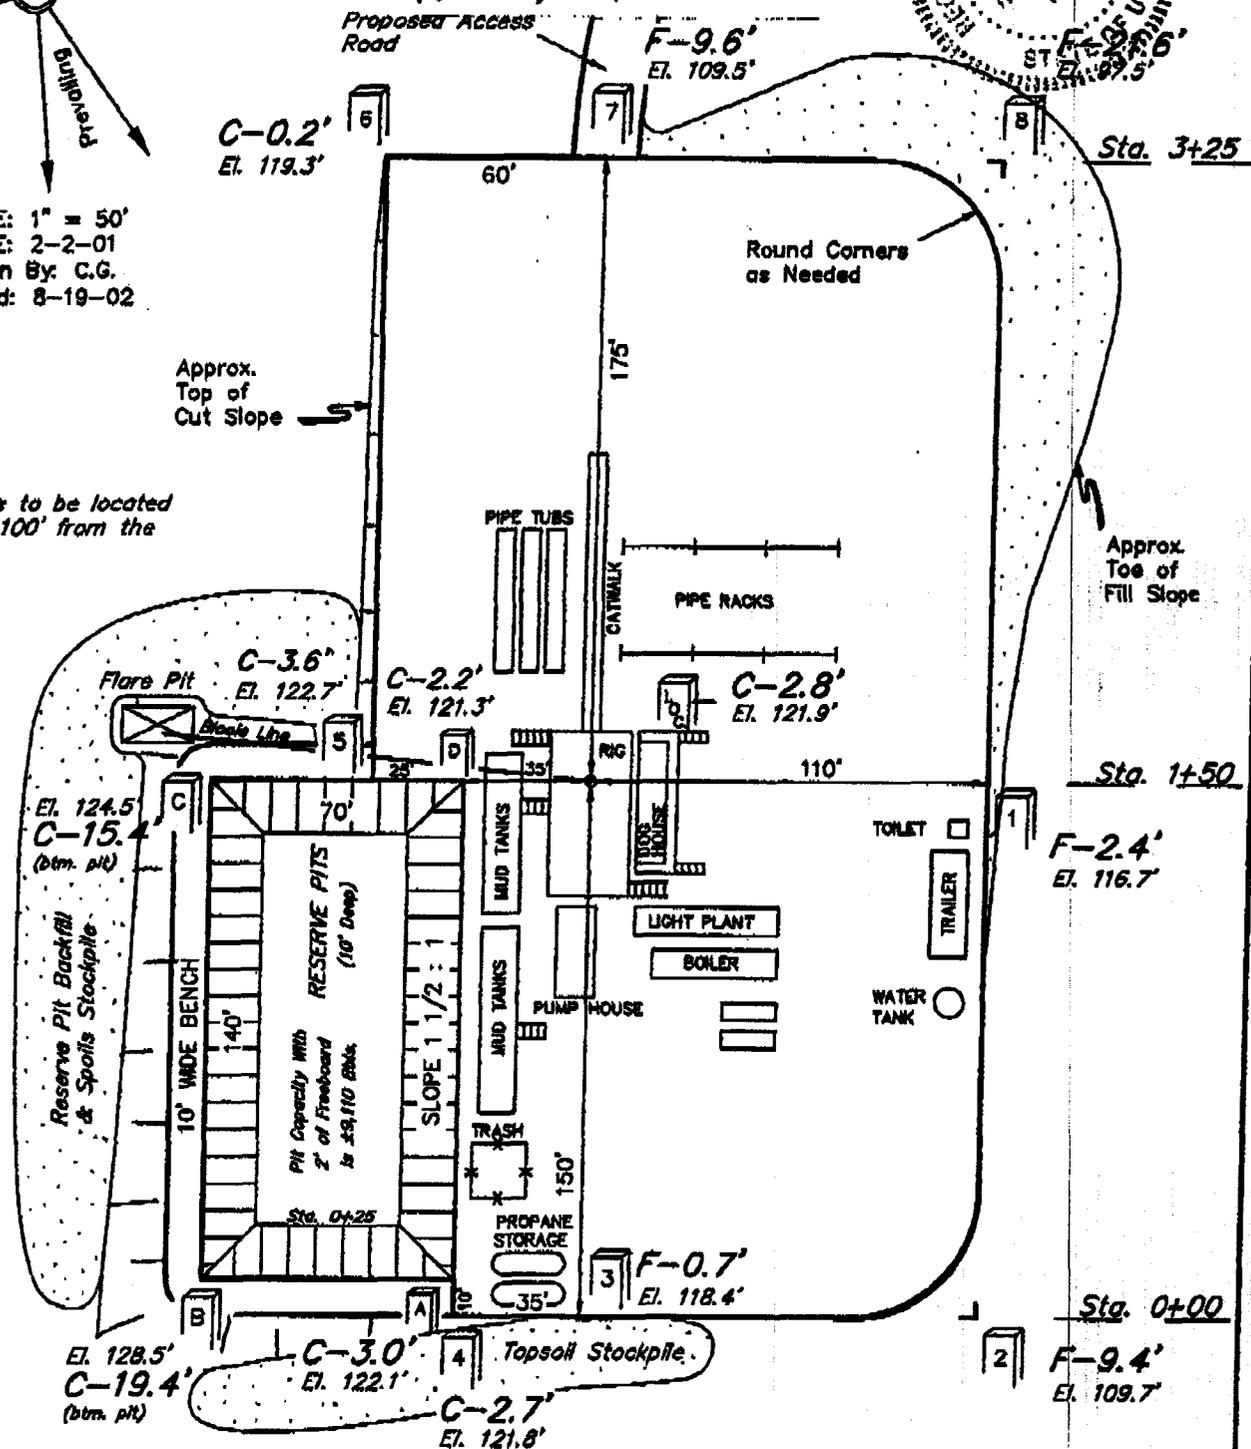

NOTES:

Elev. Ungraded Ground At Loc. Stake = 5121.9'  
 FINISHED GRADE ELEV. AT LOC. STAKE = 5119.1'

FIGURE #1


UTAH ENGINEERING & LAND SURVEYING  
 85 So. 200 East • Vernal, Utah 84078 • (435) 788-1017

EL PASO PRODUCTION OIL & GAS COMPANY

TYPICAL CROSS SECTIONS FOR


SOUTHMAN CANYON #31-2X  
SECTION 31, T9S, R23E, S.L.B.&M.

733 FNL, 836FUL



1" = 20'  
X-Section Scale  
1" = 50'

DATE: 2-2-01  
Drawn By: C.G.  
Revised: 8-19-02

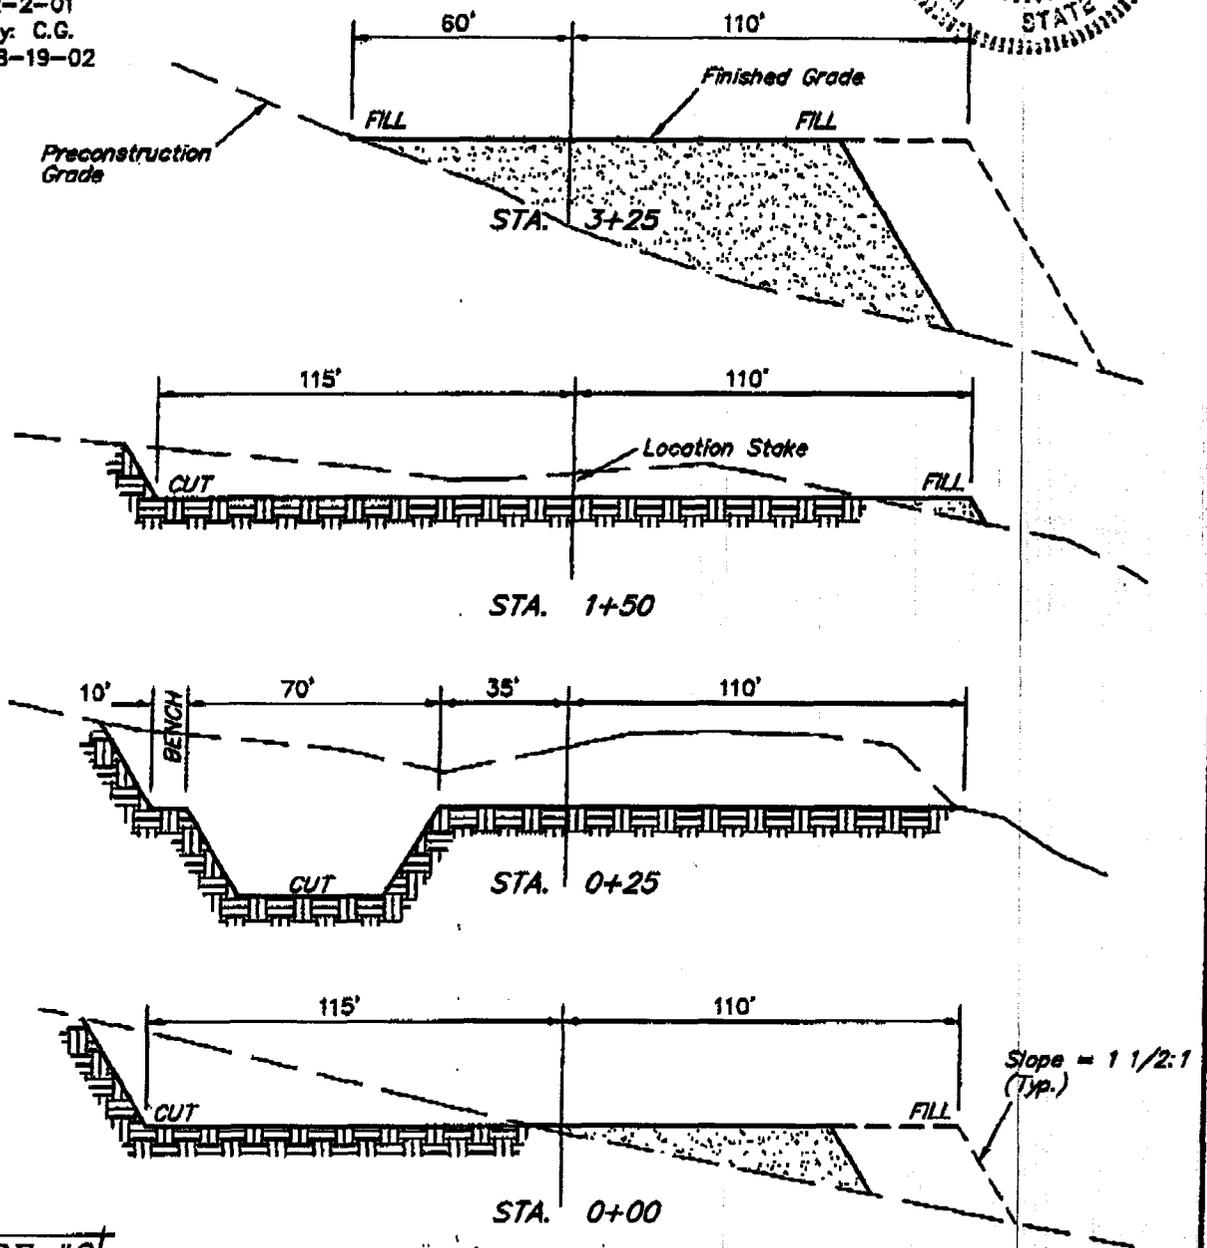

**FIGURE #2**

**APPROXIMATE YARDAGES**



CUT	
(6") Topsoil Stripping	= 1,200 Cu. Yds.
Remaining Location	= 8,710 Cu. Yds.
<b>TOTAL CUT</b>	<b>= 9,910 CU.YDS.</b>
<b>FILL</b>	<b>= 7,050 CU.YDS.</b>

EXCESS MATERIAL AFTER 5% COMPACTION	= 2,490 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 2,490 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING  
85 So. 200 East • Vernal, Utah 84078 • (435) 788-1017

3,000 PSI

# BOP STACK

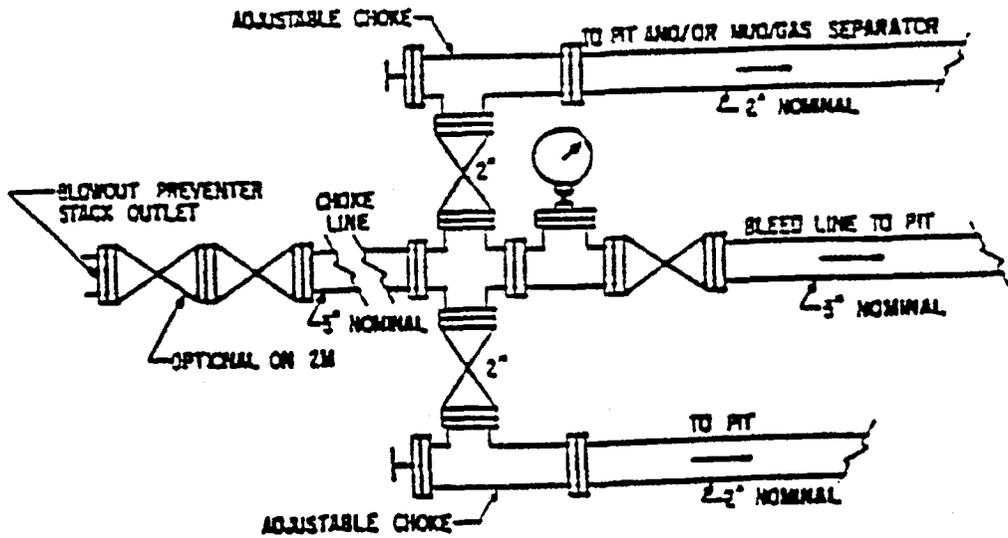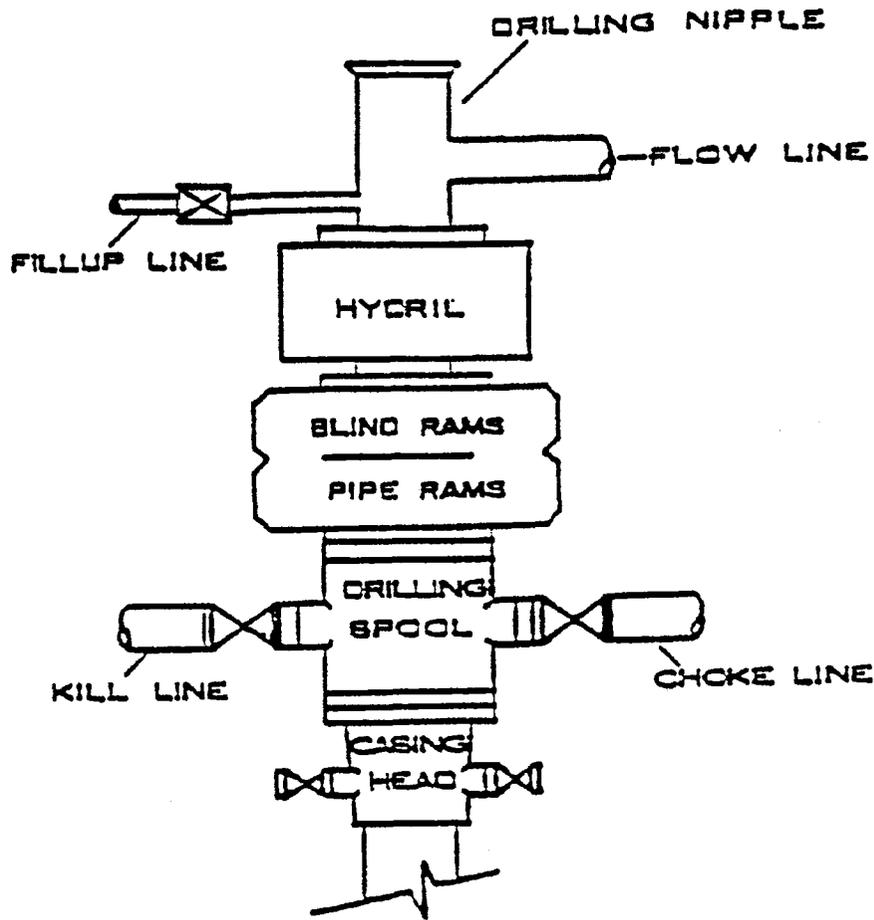

WORKSHEET  
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 03/28/2003

API NO. ASSIGNED: 43-047-34898

WELL NAME: SOUTHMAN CYN 31-2X (RIG Skid)  
OPERATOR: WESTPORT OIL & GAS CO ( N2115 )  
CONTACT: CHERYL CAMERON

PHONE NUMBER: 435-781-7023

PROPOSED LOCATION:

NWNW 31 090S 230E  
SURFACE: 0733 FNL 0836 FWL  
BOTTOM: 0733 FNL 0836 FWL  
UINTAH  
NATURAL BUTTES ( 630 )

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal  
LEASE NUMBER: U-33433  
SURFACE OWNER: 1 - Federal  
PROPOSED FORMATION: WSTC

LATITUDE: 39.99777  
LONGITUDE: 109.37546

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]  
(No. CO 1203 )
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit  
(No. 43-8496 )
- RDCC Review (Y/N)  
(Date: \_\_\_\_\_ )
- Fee Surf Agreement (Y/N)

LOCATION AND SITING:

- \_\_\_ R649-2-3.  
Unit \_\_\_\_\_
- \_\_\_ R649-3-2. General  
Siting: 460 From Qtr/Qtr & 920' Between Wells
- \_\_\_ R649-3-3. Exception
- Drilling Unit  
Board Cause No: 179-7 (80')  
Eff Date: 2-3-95  
Siting: NW or SE 1/4 within a 400' window in center of 1/4
- \_\_\_ R649-3-11. Directional Drill

COMMENTS:

STIPULATIONS:

1- Federal approval



STATE OF UTAH  
DIVISION OF OIL, GAS AND MINING  
ENTITY ACTION FORM - FORM 6

OPERATOR Westport O&G Co.L.P.  
ADDRESS P.O. Box 1148  
Vernal, UT 84078

OPERATOR ACCT. NO. N 2115

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
	99999	2900	43-047-34824	NBU 466	NWNE	32	10S	22E	Uintah	4/1/2003	4/1/2003
WELL 1 COMMENTS: Spud w/ Ski Air Rig @ 8:00 am <i>4/4/2003</i>											
ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
	99999	13752	43-047-34725	Southman Canyon 31-2	NWNW	31	9S	23E	Uintah	2/13/2003	2/13/2003
WELL 2 COMMENTS: Spud w/ Ski Air Rig @ 8:00 am <i>4/4/2003</i>											
ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
	99999	13755	Not Assigned	Southman Canyon 31-2X	NWNW	31	9S	23E	Uintah	3/31/2003	3/31/2003
WELL 3 COMMENTS: Spud w/ Skir Bucket Rig @ 8:00 am <i>4/4/03</i> <i>43-047-34898</i>											
ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
WELL 4 COMMENTS:											
ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
WELL 5 COMMENTS:											

ACTION CODES (See instructions on back of form)

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.  
(3/89)

*Sheryl [Signature]*  
Signature

RECEIVED

APR 02 2003

DIV. OF OIL, GAS & MINING

Operations 04/02/03  
Title \_\_\_\_\_ Date \_\_\_\_\_  
Phone No. (435) 781-7023

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

006

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.  
U-33433

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.  
See Below

9. API Well No.  
See Below

10. Field and Pool, or Exploratory Area  
Bonanza

11. County or Parish, State  
Uintah, UT

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
WESTPORT OIL & GAS COMPANY, L.P.

3a. Address  
P.O. BOX 1148 VERNAL, UT 84078

3b. Phone No. (include area code)  
(435) 781-7023

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
Sec. 31, T9S, R23E

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other Gathering Facility

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

Operator requests that all condensate be transferred by vacuum truck for the Southman Canyon 31-2X, Southman Canyon 31-3, and Southman Canyon 31-4 that is currently stored on each location in 200 Bbl combination tanks (condensate + water), and transferred to the Southman Canyon 31-1-L location, and stored in the existing 400 Bbl condensate tank, until sold. No new disturbance shall occur in creating the proposed gathering facility for lease U-33433.

Southman Canyon 31-2X API No. 43-047-34725 <sup>398</sup> T09S R23E SEC-31  
 Southman Canyon 31-3 API No. 43-047-34726 T09S R23E SEC-31 - Conf  
 Southman Canyon 31-4 API No. 43-047-34727 T09S R23E SEC-31 - Conf  
 Southman Canyon 31-1-L API No. 43-047-32543 T09S R23E SEC-31

RECEIVED  
APR 03 2003

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)  
Cheryl Cameron

Signature

Title  
Operations

Date  
April 1, 2003

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements **Accepted by the** as to any matter within its jurisdiction.

(Instructions on reverse)

Utah Division of  
Oil, Gas and Mining

COPY SENT TO OPERATOR  
Date: 4/7/03  
By: GHD

Date: 4/7/2003  
By:

Federal Approval Of This  
Action Is Necessary



# State of Utah

DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

1594 West North Temple, Suite 1210

PO Box 145801

Salt Lake City, Utah 84114-5801

(801) 538-5340 telephone

(801) 359-3940 fax

(801) 538-7223 TTY

[www.nr.utah.gov](http://www.nr.utah.gov)

Michael O. Leavitt  
Governor

Robert L. Morgan  
Executive Director

Lowell P. Braxton  
Division Director

April 7, 2003

Westport Oil & Gas Company, L.P.  
P O Box 1148  
Vernal, UT 84078

Re: Southman Canyon 31-2X Well, 733' FNL, 836' FWL, NW NW, Sec. 31, T. 9 South,  
R. 23 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-34898.

Sincerely,

A handwritten signature in black ink, appearing to read 'John R. Baza', written over a large, stylized flourish.

John R. Baza  
Associate Director

pab  
Enclosures

cc: Uintah County Assessor  
Bureau of Land Management, Vernal District Office

**Operator:** Westport Oil & Gas Company, L.P.  
**Well Name & Number** Southman Canyon 31-2X  
**API Number:** 43-047-34898  
**Lease:** U-33433

**Location:** NW NW      **Sec.** 31      **T.** 9 South      **R.** 23 East

### Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB NO. 1004-0135  
Expires: November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.*

5. Lease Serial No.  
UTU-33433

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

**SUBMIT IN TRIPLICATE - Other instructions on reverse side.**

8. Well Name and No.  
SOUTHMAN CANYON 31-2X (rig 2A)

9. API Well No.  
43-047-34898

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
WESTPORT OIL & GAS COMPANY L.P  
Contact: SHEILA UPCHEGO  
E-Mail: supchego@westportresourcescorp.com

3a. Address  
P.O. BOX 1148  
VERNAL, UT 84078

3b. Phone No. (include area code)  
Ph: 435.781.7024  
Fx: 435.781.7094

10. Field and Pool, or Exploratory  
BONANZA

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
Sec 31 T9S R23E NWNW 733FNL 836FWL

11. County or Parish, and State  
UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Well Spud
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

MIRU SKI BUCKET RIG & SPUD 18 1/2" CONDUCTOR HOLE @ 8 AM ON 3/13/03. DRILLED TO 50' OF 16" CONDUCTOR PIPE. CMT W/ 2 YARDS READY MIX.

RAN 9 5/8" 32.3# H-40 STC CSG. CMT W/525 SX CLASS G 1ST STAGE 'G' + 2% CACL2 .25#/SK CELLO FLAKE 490 SX @ 15.8 PPG.

14. I hereby certify that the foregoing is true and correct.  
**Electronic Submission #21021 verified by the BLM Well Information System  
For WESTPORT OIL & GAS COMPANY L.P, sent to the Vernal**

Name (Printed/Typed) SHEILA UPCHEGO

Title REGULATORY ANALYST

Signature  (Electronic Submission)

Date 04/24/2003

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved By \_\_\_\_\_

Title \_\_\_\_\_

Date \_\_\_\_\_

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office \_\_\_\_\_

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**\*\* ORIGINAL \*\* ORIGINAL \*\* ORIGINAL \*\* ORIGINAL \*\* ORIGINAL \*\* ORIGINAL \*\* ORIGINAL**

**RECEIVED**

**APR 28 2003**

DEPT. OF OIL, GAS & MINING

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB NO. 1004-0135  
Expires: November 30, 2000

009

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.*

5. Lease Serial No.  
UTU-33433

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

**SUBMIT IN TRIPLICATE - Other instructions on reverse side.**

8. Well Name and No.  
SOUTHMAN CANYON 31-2X

9. API Well No.  
43-047-34898

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
WESTPORT OIL & GAS COMPANY L.P  
Contact: SHEILA UPCHEGO  
E-Mail: supcheho@westportresourcescorp.com

3a. Address  
P.O. BOX 1148  
VERNAL, UT 84078

3b. Phone No. (include area code)  
Ph: 435.781.7024  
Fx: 435.781.7094

10. Field and Pool, or Exploratory  
BONANZA

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
Sec 31 T9S R23E NWNW 733FNL 836FWL

11. County or Parish, and State  
UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Drilling Operations
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

FINISHED DRLG F/2010' TO 8505'. RAN 4 1/2" 11.6# J-55 LTC CSG. PMP 30 BBLS AHEAD OF SCAVENGER CMT @9.5 PPG. FOLLOWED BY 440 SX PL II + 3% KCL @11.0 PPG. TAILED W/1330 SX 50/50 POZ + 10% SALT + 2% GL @14.8 PPG YIELD 1.31 FT 3/SK. NO RETURNS TO SURFACE. RD


RELEASED RIG ON 5/5/03 AT 20:00 HRS.

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #21689 verified by the BLM Well Information System  
For WESTPORT OIL & GAS COMPANY L.P, sent to the Vernal

Name (Printed/Typed) SHEILA UPCHEGO

Title REGULATORY ANALYST

Signature 

Date 05/12/2003

THIS SPACE FOR FEDERAL OR STATE OFFICE USE  
**RECEIVED**

Approved By \_\_\_\_\_

Title

**MAY 20 2003**

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

DIV. OF OIL, GAS & MINING

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**\*\* ORIGINAL \*\* ORIGINAL \*\* ORIGINAL \*\* ORIGINAL \*\* ORIGINAL \*\* ORIGINAL \*\* ORIGINAL \*\***

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**SUNDRY NOTICES AND REPORTS ON WELLS**

**Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.**

010

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

5. Lease Serial No.  
**U-33433**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.  
**SOUTHMAN CANYON 31-2X**

9. API Well No.  
**43-047-34898**

10. Field and Pool, or Exploratory Area  
**NATURAL BUTTES**

11. County or Parish, State  
**UINTAH, UT**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
**WESTPORT OIL & GAS COMPANY, L.P.**

3a. Address  
**P.O. BOX 1148 VERNAL, UT 84078**

3b. Phone No. (include area code)  
**(435) 781-7023**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**NWNW 733' FNL, 836' FWL  
SEC. 31, T9S, R23E**

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input checked="" type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

THE SUBJECT WELL WAS PLACED ON SALES ON 5/22/03 @ 1:40 PM. REFER TO THE ATTACHED CHRONOLOGICAL DRILLING & COMPLETION HISTORY REPORT.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

**CHERYL CAMERON**

Title

**OPERATIONS**

Signature

Date

**MAY 28, 2003**

**THIS SPACE FOR FEDERAL OR STATE USE**

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

**RECEIVED**  
**JUN 04 2003**  
DIV. OF OIL, GAS & MINING

## WESTPORT OIL &amp; GAS COMPANY, LP

## CHRONOLOGICAL DRILLING &amp; COMPLETION HISTORY

SOUTHMAN CANYON 31-2X

Page 1

UINTAH COUNTY, UT

## DRILLING REPORT:

Rig: Ski Drilling bucket rig  
 NW/NW 31-9S-23E  
 Target pay: Wasatch, Mesa Verde

4/2/03	TD: 50'	CSG: 16" @ 50'	MW: air	SD: DSS:
	Spudded @ 8 a.m. 3/31/03. Drilled 18 1/2" hole to 50'. Ran 16" conductor csg. Cmt w/ready-mix cmt. BLM & UDOGM notified, work witnessed by Alan Walker, BLM.			
4/3/03	TD: 50'	CSG: 16" @ 50'	MW: air	SD: DSS:
	WO air rig.			
4/4/03	TD: 50'	CSG: 16" @ 50'	MW: air	SD: DSS:
	WO air rig.			
4/7/03	TD: 50'	CSG: 16" @ 50'	MW: air	SD: DSS:
	WO air rig.			
4/8/03	TD: 50'	CSG: 16" @ 50'	MW: air	SD: DSS:
	WO air rig.			
4/9/03	TD: 50'	CSG: 16" @ 50'	MW: air	SD: DSS:
	WO air rig.			
4/10/03	TD: 50'	CSG: 16" @ 50'	MW: air	SD: DSS:
	WO air rig.			
4/11/03	TD: 50'	CSG: 16" @ 50'	MW: air	SD: DSS:
	WO air rig.			
4/14/03	TD: 50'	CSG: 16" @ 50'	MW: air	SD: DSS:
	WO air rig.			
4/15/03	TD: 50'	CSG: 16" @ 50'	MW: air	SD: DSS:
	WO air rig.			
4/16/03	TD: 50'	CSG: 16" @ 50'	MW: air	SD: DSS:
	WO air rig.			
4/17/03	TD: 845'	CSG: 16" @ 50'	MW: air	SD: DSS:
	MIRU Ski Drilling air rig. Drilled 12 1/4" hole To 845', encountered wtr, could not cont drilling. RD. WORT.			
4/21/03	Rig: Caza 81	AFE: 803066D		
	TD: 1818'	CSG: 16" @ 50'	MW: air	SD: 4/20/03 DSS: 1
	MIRU. PU BHA. Drilled 12 1/4" hole from 845' to 1818'. Drilling @ report time.			
4/22/03	AFETD: 7,400'	ATD: 8,500'		
	TD: 2010'	CSG: 16" @ 50'	MW: air	SD: 4/20/03 DSS: 1
	Drilled 192' in 5 hrs. Circ & cond, short trip. POOH, LD 8" DC. Ran 9 5/8" csg. Cmt w/BJ, 2 stages, no returns. BLM witness on loc. Running 1" tbg @ report time.			
4/23/03	TD: 2010'	CSG: 9 5/8" @ 2010'	MW: air	SD: 4/20/03 DSS: 3
	Ran 100' 1" tbg dn annulus. Top out cmt, 8 stages, 525 sx total. Cmt @ report time.			
4/24/03	TD: 2230'	CSG: 9 5/8" @ 2010'	MW: air mist	SD: 4/20/03 DSS: 4
	Finished top out cmt. Cut off csg & installed WH. NUBOP & tst. RIH w/bit. Drilled out DV tool & cmt, tst csg to 1500#. Drilled out cmt & float equip. Blew hole dry. Drilled 220' in 5 hrs w/air mist (hole is taking flu). Drilling @ report time.			
4/25/03	TD: 3550'	CSG: 9 5/8" @ 2010'	MW: 8.4	SD: 4/20/03 DSS: 5
	Drilled 1540' in 22.5 hrs. Drilling @ report time.			
4/28/03	TD: 6100'	CSG: 9 5/8" @ 2010'	MW: aerated wtr	SD: 4/20/03 DSS: 8
	Drilled 2443' in 56 hrs. TFNB (LD DC @ CAZA request, rig off daywork while LD			

& PU drill collars). Drilled 107' in 4 hrs. Drilling @ report time.

- 4/29/03 TD: 6760' CSG: 9 5/8" @ 2010' MW: aerated wtr SD: 4/20/03 DSS: 8  
Drilled 680' in 23.5 hrs. Drilling @ report time.
- 4/30/03 TD: 7055' CSG: 9 5/8" @ 2010' MW: aerated wtr SD: 4/20/03 DSS: 10  
Drilled from 6760'-7055'. TFNB. Wash & ream from 6990'-7055'. Drilling @ report time.
- 5/1/03 TD: 7660' CSG: 9 5/8" @ 2010' MW: aerated wtr SD: 4/20/03 DSS: 10  
Drilled from 7055'-7350'. Hit wtr flow @ 7200', approx. 1000 bbl/hr. Drilled from 7350'-7660' w/aerated wtr to control pit volume. Drilling at report time. NOTE. Reserve pit leaking resulting in pit water leaking thru surface fractures off location. Wtr contained & BLM notified.
- 5/5/03 TD: 8505' CSG: 9 5/8" @ 2010' MW: 8.4 SD: 4/20/03 DSS: 15  
Drilled to 8505' TD. Attempt OH logs, hit bridge @5167'. TIH. Ream 5168' 6167'. TIH to btm & CCH. POOH. Attempt OH logs. Hit bridge @ 5298'. Abort logging operations. TIH. Tagged bridge @ 5298'. TIH to btm. POOH, LDDP & BHA. Running Production Csg.
- 5/6/03 TD: 8505' CSG: 4 1/2" @ 8505' MW: 8.4 SD: 4/20/03 DSS: 16  
Run and cmt 4 1/2" Production Csg. ND. Rls rig @ 2000 hrs 5/5/03. Moving to Bonanza 10-4.
- 5/7/03 TD: 8505' CSG: 4 1/2" @ 8505' MW: 8.4 SD: 4/20/03 DSS: 16  
WO completion.
- 5/8/03 TD: 8505' CSG: 4 1/2" @ 8505' MW: 8.4 SD: 4/20/03 DSS: 16  
WO completion.
- 5/9/03 **POOH W/TBG**  
RIG CREW HELD SAFETY MEETING (MOVING RIG & RU). MOVED RIG FROM BAYLESS ST 2-1 TO SOUTHMAN CANYON. RU RIG & EQUIP. PU 3 7/8" 4 BLADED MILL, SUB & SN. PU & TALLY 2 3/8" J-55 TBG. RIH TO PBTD @ 8446'. CIRC HOLE CLEAN W/140 BBLS 2% KCL. SDFD.
- 5/12/03 **READY TO FRAC**  
RIG CREW HELD SAFETY MEETING. POOH W/TBG. POOH W/2 3/8" TBG. LD 65 JTS. STANDING BACK 96 STANDS. LD 3 7/8" MILL. RU CUTTERS. RIH & RUN CMT BOND LOG FROM 5000' TO 200' ABV CMT TOP @ 2900'. TST CSG @ 5000#. RIH W/PERF GUN TO 8351'-53', 2 SPF; 8322'-24', 2 SPF; 8284'-86', 2 SPF; 8236'-38', 2 SPF; 8204'-06', 2 SPF; 8158'-60', 2 SPF; 8107'-09', 2 SPF; W/23 GRAM CHARGES. BRK DN PERFS @ 3800#. ISIP: 2800#, FG: .78. RD CUTTERS. SIW. SDFD.
- 5/13/03 **CONT TO FRAC**  
RIG CREW HELD SAFETY MEETING W/DOWELL. TST LINES.  
STAGE 1: PMP 1446 BBLS YF116ST & 147,500# 20/40 SD. ISIP: 4004#, NPI: 1204#, 93, ATP: 4656#, MTP: 5008#, ATR: 37.8 BPM, MTR: 45.0 BPM.  
STAGE 2: RU CUTTERS WIRELINE & RIH W/4 1/2" CBP & PERF GUNS TO 8010'. SET CBP. PUH TO 7880'-86', 3 SPF; 7780'-84', 3 SPF W/23 GRAM CHARGES, 120 DEG PHASING. BRK DN PERFS @ 2271#, ISIP: 1740#, FG: .66. PMP 1404 BBLS YF116ST & 150,200# 20/40 SD. ISIP: 2148#, NPI: 408#, FG: .71, ATP: 3129#, MTP: 4414#, ATR: 34.0 BPM, MTR: 36.9 BPM.  
STAGE 3: RIH W/4 1/2" CBP & PERF GUNS TO 7710'. SET CBP. PUH. PERF @ 7594'-96', 7550'-52', 7524'-26', 7498'-7500', 7482'-84', 7458'-60', 7412'-14', 7378'-80', 7338'-40', 2 SPF, 36-HOLES W/12 GRAM CHARGES, 120-DEG PHASING. BRK DN PERF @ 1795#. ISIP: 1600#, FG: .64. PMP 2295 BBLS YF115ST & 259,000# 20/40 SD. ISIP: 2343#, NPI: 743#, FG: .64, ATP: 3958#, MTP: 4665#, ATR: 48.1 BPM, MTR: 50.3 BPM.  
STAGE 4: RIH W/4 1/2" CBP & PERF GUNS TO 7270'. SET CBP. PUH & PERF 7082'-84', 6940'-42', 6920'-22', 6890'-92', 6860'-62', 2 SPF, 20 HOLES W/12 GRAM CHARGES, 120 DEG PHASING. BRK DN PERFS @ 1765'. ISIP: 1311#, FG: .62. PMP 167 BBLS YF115ST & 190,000# 20/40 SD. ISIP: 2460#, NPI: 1149#, FG: .79, ATP: 3310#, MTP: 4480#, ATR: 38.9 BPM, MTR: 41.0 BPM. SIW. SDFD.
- 5/14/03 **DRILLING OUT CBP**  
RIG CREW HELD SAFETY MEETING W/DOWELL.  
STAGE 5: RIH W/4 1/2" CBP & PERF GUNS TO 6800'. SET CBP. PU & PERF @ 6740'-6750', 3 SPF, 30 HOLES W/23 GRAM CHARGES, 120 DEG PHASING. BRK DN PERF @ 1771#. ISIP: 1100#, FG: .60. PMP 443 BBLS YF114ST & 40,000# 20/40 SD. ISIP: 2321#,

NPI: 1221#, FG: .78, ATP: 2794#, MTP: 3806#, ATR: 27.7 BPM, MTR: 30.8 BPM.  
STAGE 6: RIH W/ 4 1/2" CBP & PERF GUN TO 6680'. SET CBP. PUH. PERF @ 6534'-  
6540', 4 SPF, 24 HOLES W/23 GRAM CHARGES, 90 DEG PHASING. BRK DN PERF @  
3765#. ISIP: 1450#, FG: .66. PMP 425 BBLs YF114ST & 40,000# 20/40 SD. ISIP: 2816#,  
NPI: 1366#, FG: .86, ATP: 3163#, MTP: 4242#, ATR: 26.9 BPM, MTR: 30.5 BPM. PU 3  
7/8" MILL TOOTH BIT. PMP OFF SUB, PSN & RIH TO 6440'. RU DRILLING EQUIP.  
SIW. SDFD.

- 5/15/03      **POOH W/FISH**  
RIG CREW HELD SAFETY MEETING (DRILLING EQUIP). EST CIRC. RIH TO CBP @  
6460'. DRILLED OUT CBP IN 12 MIN W/100# DIFF PRESS. RIH. TAG SD @  
6632'. CO 38' SD TO CBP @ 6680'. DRILLED ON CBP FOR 45 MIN. UNABLE TO  
DRILL UP CBP. RD DRILLING EQUIP. POOH TO EOT OF 6608'. WELL FLOW UP  
TBG. WO 10# BRINE. PMP 100 BBLs BRINE. KILLED WELL. POOH W/TBG LD. PU  
3 3/4" OVER SHOT W/ 2 1/2" GRAPPLE TO 6674'. TAG SD. CO 6' SD. LATCHED FISH.  
PUH TO 5360'. SIW. SDFD.
- 5/16/03      **POOH**  
RIG CREW HELD SAFETY MEETING (POOH & PMPS) SITP: 200#, SICP: 200#. BLEW  
WELL DN, KILL WELL W/ 80 BBLs BRINE WTR. POOH W/ TBG FROM 5360'. LD FISH &  
OVER SHOT. PU 3 7/8" MILL TOOTH BIT & PMP OFF SUB PSN & RIH TO 6680'. RU  
DRILLING EQUIPMENT. CIRC BRINE OUT OF HOLE. DRILLED UP CBP #2 @ 6680' IN 10  
MIN W/ 0# DIFF PRESSURE.  
CBP #3: RIH TO 6735'. TAG SD, CLEAN OUT 65' OF SD TO CBP @ 6800'. DRILLED UP  
CBP IN 12 MIN W/ 200# DIFF PRESSURE.  
CBP #4: RIH TO 7100'. TAG SD, CLEANED OUT 170' OF SD TO CBP @ 7270'. DRLD UP  
CBP IN 26 MIN W/ 300# DIFF PRESSURE.  
CBP #5: RIH TO 7565', TAG SD, CLEANED OUT 145' OF SD TO CBP @ 7710. DRILLED  
UP CBP IN 7 MIN W/ 200# DIFF PRESSURE.  
CBP #6: RIH TO 7935', TAG SD, CLEAN OUT 75' OF SD TO CBP @ 8010. DRLD OUT CBP  
40 MIN W/ 5003 DIFF PRESSURE. RIH, TAG SD @ 8290', CLEAN OUT TO 8300',  
COULDN'T CLEAN OUT ANY MORE. PU ABOVE THE PERFS. SDFD.
- 5/19/03      **FLWG BCK WELL.**  
RIG CREW HELD SAFETY MEETING (WORKING W/HIGH PRESSURE). SICP: 2300#,  
SITP: 0. BLEW WELL DN TO 1100#. POOH, LAYING DN 55 JTS. RIH W/ 27 STANDS,  
LANDED TBG W/ 1600# SICP. ND BOPE NU WH. RU CUTTERS WIRELINE. RIH W/ A 10'  
TBG GUN. PERF TBG (4 SPF) 6430-40' (40 HOLES) POOH. RD CUTTERS. OPEN UP  
WELL ON 8 CHK. FTP: 1700#, SICP: 2200#. SDFD. LAST FLW BCK REPORTED: FTP:  
2100#, CP: 2900#, CHK 12/64", 10 BWP, SAND CLEAN W/ 5520 BBLs LLTR.
- 5/20/03      **WO FACILITIES**
- 5/21/03      **WO FACILITIES. WILL PUT ON SALES TODAY.**
- 5/22/03      **WO FACILITIES. WILL PUT ON SALES TODAY.**
- 5/23/03      **WENT ON SALES 5/22/03, 1:40 PM. 1.6 MMCFD, FTP: 2200#, SICP: 3000#,  
14/64" CHK, 0 BC, 16 BWP, LP: 405#.**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB NO. 1004-0137  
Expires: November 30, 2000

**011 WELL COMPLETION OR RECOMPLETION REPORT AND LOG**

5. Lease Serial No.  
**U-33433**

1a. Type of Well  Oil Well  Gas  Dry  Other  
b. Type of Completion:  New  Work Over  Deepen  Plug Back  Diff. Resvr.  
Other \_\_\_\_\_

6. If Indian, Allottee or Tribe Name  
7. Unit or CA Agreement Name and No.

2. Name of Operator  
**Westport Oil & Gas Company L.P.**

8. Lease Name and Well No.  
**SOUTHMAN CANYON #31-2X**

3. Address **P.O. Box 1148 Vernal, Utah 84078**  
3a. Phone No. (include area code) **(435)-781-7024**

9. API Well No.  
**43-047-34898**

4. Location of Well (Report locations clearly and in accordance with Federal requirements)\*

At surface **NWNW 733'FNL & 836'FWL**

10. Field and Pool, or Exploratory  
**BONANZA**

At top prod. interval reported below

11. Sec., T., R., M., or Block and Survey or Area **SEC.31-T9S-R23E**

At total depth

12. County or Parish **UINTAH** 13. State **UTAH**

14. Date Spudded **02/13/03** 15. Date T.D. Reached **05/06/03** 16. Date Completed  D & A  Ready to Prod.  
**05/22/03**

17. Elevations (DF, RKB, RT, GL)\*  
**5119'GR**

18. Total Depth: MD **8505'** TVD 19. Plug Back T.D.: MD **8459'** TVD 20. Depth Bridge Plug Set: MD **8459'** TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)  
*PE/AH/GR, PE/CN/THASE DET DEN/5-9-03 BHCS/GR  
APS-DI-GR-CCL-GR/CBL-5-12-03 PE/MICADLOG/GR-5-9-03*

22. Was well cored?  No  Yes (Submit copy)  
Was DST run?  No  Yes (Submit copy)  
Directional Survey?  No  Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
18 1/2"	14"	50#		50'		126 SX			
12 1/4"	9 5/8"	32.3#		2010'		525 SX			
7 7/8"	4 1/2"	11.6#		8505'		1770 SX			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Set (MD)
2 3/8"	6484'							

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) SEE ADDITIONAL PAGE			SEE ADDITIONAL PAGE			
B)						
C)						
D)						

26. Perforation Record

27. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Depth Interval	Amount and type of Material
SEE ADDITIONAL PAGE	

**RECEIVED**

**JUN 16 2003**

**DIV. OF OIL, GAS & MINING**

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
05/22/03	06/03/03	24	→		2,204	255			PRODUCING
Choke Size	Tbg. Press. Flwg. #	Csg. Press. #	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Well Status	
20/64	SI	1359#	→		2204	255			FLOWING

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
05/22/03	06/03/03	24	→		2204	255			PRODUCING
Choke Size	Tbg. Press. Flwg. #	Csg. Press. #	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Well Status	
20/64	SI	1359#	→		2204	255			FLOWING

(See instructions and spaces for additional data on reverse side)

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
05/22/03	06/03/03	24	→		2204	255			PRODUCING
Choke Size	Tbg. Press. Flwg. 1037#	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	
20/64	SI	1359#	→		2204	255			FLOWING

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
05/22/03	06/03/03	24	→		2204	255			PRODUCING
Choke Size	Tbg. Press. Flwg. 1037#	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	
20/64	SI	1359#	→		2204	255			FLOWING

29. Disposition of Gas (Sold, used for fuel, vented, etc.)

**SOLD**

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
T WASATCH T MESAVERDE	4444' 6823'	6823'			

32. Additional remarks (include plugging procedure):

33. Circle enclosed attachments:

- 1. Electrical/Mechanical Logs (1 full set req'd.)
- 2. Geologic Report
- 3. DST Report
- 4. Directional Survey
- 5. Sundry Notice for plugging and cement verification
- 5. Core Analysis
- 7. Other:

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)\*

Name (please print) Sheila Upchego Title Regulatory Analyst

Signature  Date 6/10/2003

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Form 3160-4

Additional Page For Comments

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

U-33433

Lease Serial No.

**SOUTHMAN CANYON #31-2X**  
**NWNW SEC. 31-T9S-R23E**

ITEM# 25, 26 & 27

<b>INTERVAL</b>	<b>SIZE</b>	<b>NUMBER</b>
<b>MESAVERDE/WASATCH</b>		
8107'-8353'		
7780'-7886'		
7338'-7596'		36 HOLES
6860'-7084'		20 HOLES
6740'-6750'		30 HOLES
6534'-6540'		24 HOLES

<b>DEPTH INTERVAL</b>	<b>AMOUNT &amp; KIND OF MATERIAL</b>
8107'-8353'	PMP 1446 BBLs YF116ST & 147,500# 20/40 SD
7780'-7886'	PMP 1404 BBLs YF116ST & 150,200# 20/40 SD
7338'-7596'	PMP 2295 BBLs YF115ST & 259,000# 20/40 SD
6860'-7084'	PMP 1677 BBLs YF115ST & 190,000# 20/40 SD
6740'-6750'	PMP 443 BBLs YF114ST & 40,000# 20/40 SD
6534'-6540'	PMP 425 BBLs YF114ST & 40,000# 20/40 SD

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

RECEIVED

APR 05 2004

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

DIV. OF OIL, GAS & MINING

Lease Serial No.  
U-33433

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.  
**SOUTHMAN CANYON 31-2X**

9. API Well No.  
43-047-34898

10. Field and Pool, or Exploratory Area  
NATURAL BUTTES

11. County or Parish, State  
UINTAH, UTAH

012

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
WESTPORT OIL & GAS COMPANY L.P.

3a. Address  
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)  
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
NWNW SECTION 31-T9S-R23E 733'FNL & 836'FWL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input checked="" type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

1/2/04: BLEW WELL DN PMP 30 BBLS 9# BRINE WATER TO KILL WELL. NDWH NUBOP RU FLOOR & TBG EQUIP. POOH STANDING BACK 2 3/8" J-55 TBG. LD 3 7/8" BIT POBS SN & PERF'D JT. (196 TOTAL JTS TBG) FOUND ALL CONES GONE OFF BIT. KILL WELL W/ANOTHER 30 BBLS 9# BRINE WATER. PU 3 7/8" 3 BLADED MILL POBS +45 SN & RIH ON 195 JTS 2 3/8" J-55 TBG EOT @6408'.  
WELL DN EOT-MILL @8330'+ PMP 40 BBLS 10# BRINE DN TBG & 80 BBLS 10# BRINE DN CSG WORKING TBG.

TURNED WELL OVER TO PRODUCTION ON 1/8/04.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

Sheila Upchego

Title

Regulatory Analyst

Date

April 2, 2004

*Sheila Upchego*

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

MULTIPLE WELLS- SEE ATTACHED

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

MULTIPLE WELLS- SEE ATTACHED

8. Well Name and No.

MULTIPLE WELLS- SEE ATTACHED

9. API Well No.

MULTIPLE WELLS- SEE ATTACHED

10. Field and Pool, or Exploratory Area

BONANZA/SOUTHMAN CANYON

11. County or Parish, State

UINTAH COUNTY, UTAH

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well

Oil Well  Gas Well  Other

2. Name of Operator

WESTPORT OIL & GAS COMPANY, L.P.

3a. Address

1368 SOUTH 1200 EAST, VERNAL, UTAH 84078

3b. Phone No. (include area code)

435-781-7060

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

MULTIPLE WELLS- SEE ATTACHED

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other <u>VARIANCE</u>

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

Westport Oil & Gas requests a variance to Onshore Order No. 4, Part III C. a. requiring each sales tank be equipped with a pressure- vacuum thief hatch and/or vent line valve. The variance is requested as an economic analysis shows the value of the shrunk condensate will not payout the incremental cost of purchasing and maintaining the valve resulting in a loss of value over the producing life of the well.

The volume lost to shrinkage by dropping the tank pressure from 6 ozs. To 0 psig is shown to be 0.3% of the tank volume. This was determined by lab analysis of a representative sample from the field. The sample shrunk from 98.82% of original volume to 98.52% when the pressure was dropped. The average well produces approximately 6 bbls condensate per month. The resulting shrinkage would amount to 0.56 bbls per month lost volume due to shrinkage. The value of the shrunk and lost condensate does not recoup or payout the cost of installing and maintaining the valves and other devices that hold the positive tank pressure. An economic run based on the loss and costs is attached. Westport Oil & Gas requests approval of this variance in order to increase the value of the well to the operator and the mineral royalty owners.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)	Title
DEBRA DOMENICI	ENVIRONMENTAL ASSISTANT
Signature	Date
<i>Debra Domenici</i>	July 9, 2004

THIS SPACE FOR FEDERAL OR STATE USE

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Accepted by the  
Utah Division of  
Oil, Gas and Mining

Federal Approval Of This  
Action Is Necessary

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

COPY SENT TO OPERATOR  
Date: 7-16-04  
Initials: CHD

Date: 7/14/04  
By: [Signature]  
RECEIVED  
JUL 14 2004

**Westport Oil & Gas, L.P.**  
**Project Economics Worksheet**

**Instructions:** Fill in blue boxed areas with before and after project data. The evaluation results are shown below and graphed automatically at the bottom of the page. This sheet is protected to prevent accidental alteration of the formulas. See JTC for changes. OPX entered as annual costs and/or as unit OPX costs for \$/BF and \$/MCF

Project Name: **Condensate Shrinkage Economics**

Is this job a well pull or production rig job ???  Y  N (Y or N)

	BEFORE \$/Year	AFTER \$/Year	DIFFERENCE \$/Year
Gross Oil Revenue	\$1,088	\$1,099	\$11
Gross Gas Revenue	\$0	\$0	\$0
NGL Revenue	\$0	\$0	\$0
PULLING UNIT SERVICE			\$0
WIRELINE SERVICE			\$0
SUBSURF EQUIP REPAIRS			\$0
COMPANY LABOR			\$0
CONTRACT LABOR	\$0	\$200	\$200
CONTR SERVICE			\$0
LEASE FUEL GAS	\$0	\$0	\$0
UTILITIES - ELECTRICITY	\$0	\$0	\$0
CHEMICAL TREATING			\$0
MATERIAL & SUPPLY	\$0	\$150	\$150
WATER & HAULING			\$0
ADMINISTRATIVE COSTS			\$0
GAS PLANT PROCESSING			\$0
<b>Totals</b>	<b>\$0</b>	<b>\$350</b>	<b>\$350 Increased OPX Per Year</b>

**Investment Breakdown:**

	Cap/Exp Code	Cost, \$
Capital \$	820/830/840	\$1,200
Expense \$	830/860	\$0
Total \$		\$1,200

Oil Price	\$ 23.00	\$/BO
Gas Price	\$ 3.10	\$/MCF
Electric Cost	\$ -	\$/ HP / day
OPX/BF	\$ 2.00	\$/BF
OPX/MCF	\$ 0.62	\$/MCF

**Production & OPX Detail:**

	Before	After	Difference
Oil Production	0.192 BOPD	0.194 BOPD	0.002 BOPD
Gas Production	0 MCFPD	0 MCFPD	0 MCFPD
Wtr Production	0 BWPD	0 BWPD	0 BWPD
Horse Power	0 HP	0 HP	0 HP
Fuel Gas Burned	0 MCFPD	0 MCFPD	0 MCFPD

**Project Life:**

Life =  Years  
 (Life no longer than 20 years)

**Internal Rate of Return:**

After Tax IROR =

**AT Cum Cashflow:**

Operating Cashflow =  (Discounted @ 10%)

**Payout Calculation:**

Payout =  $\frac{\text{Total Investment}}{\text{Sum(OPX + Incremental Revenue)}} = 1$

Payout occurs when total AT cashflow equals investment  
 See graph below, note years when cashflow reaches zero

Payout =  Years or  Days


**Gross Reserves:**

Oil Reserves = 4 BO  
 Gas Reserves = 0 MCF  
 Gas Equip Reserves = 38 MCFE

**Notes/Assumptions:**

**An average NBU well produces 0.192 Bcpd with no tank pressure. The production is increased to 0.196 Bcpd if 4 ozs of pressure are placed on the tank. The increased production does not payout the valve cost or the estimated annual maintenance costs.**

**Project: Condensate Shrinkage Economics**

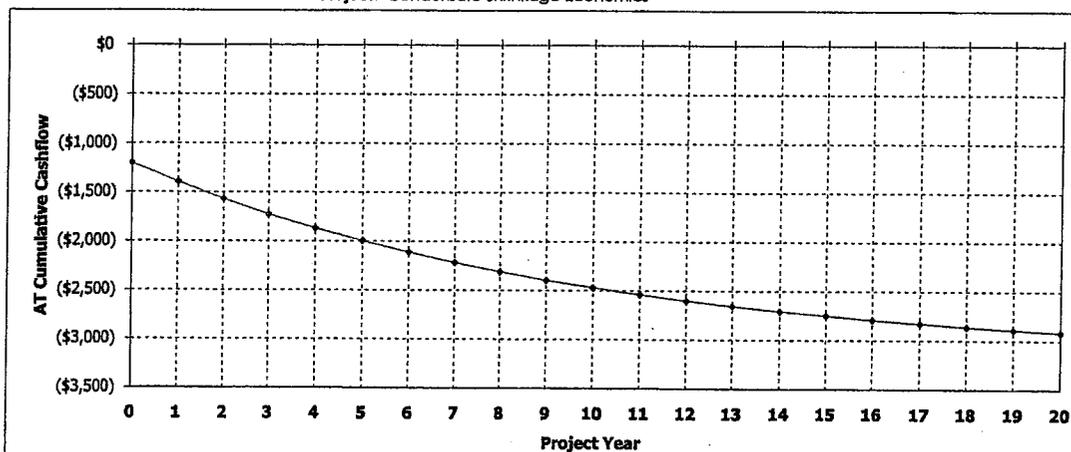

**Westport Oil and Gas, Inc.**

**NBU/Ouray Field**

RFL 2003-022

**COMPARISON OF FLASH BACK PRESSURES**

Calculated by Characterized Equation-of-State

Flash Conditions		Gas/Oil Ratio (scf/STbbl) (A)	Specific Gravity of Flashed Gas (Air=1.000)	Separator Volume Factor (B)	Separator Volume Percent (C)
psig	°F				

**Calculated at Laboratory Flash Conditions**

80	70			1.019	
0	122	30.4	0.993	1.033	101.37%
0	60	0.0	—	1.000	98.14%

**Calculated Flash with Backpressure using Tuned EOS**

80	70			1.015	
6.0 oz	65	24.6	0.777	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
4.0 oz	65	24.7	0.778	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
2.0 oz	65	24.7	0.779	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
0	65	24.8	0.780	1.003	98.82%
0	60	0.0	—	1.000	98.52%

(A) Cubic Feet of gas at 14.696 psia and 60 °F per Barrel of Stock Tank Oil at 60 °F.

(B) Barrels of oil at indicated pressure and temperature per Barrel of Stock Tank Oil at 60 °F.

(C) Oil volume at indicated pressure and temperature as a percentage of original saturated oil volume.

Note: Bubblepoint of sample in original sample container was 80 psig at 70° F with 1 cc water

**ALL WELLS ROCKY MOUNTAIN GAS- BONANZA/SOUTHMAN  
CANYON ENARDO VARIANCE**

**013**

WELL	LEGALS				STF LEASE NO	CA NUMBER	API NO
	SEC	TWN	RGE	QTR/QTR			
BONANZA 04-06	4	10S	23E	NESW	U-33433	UTU33433	430473475100S1
BONANZA 06-02	6	10S	23E	NESW	UTU38419	UTU38419	430473484300S1
BONANZA 08-02	8	10S	23E	SESE	UTU37355	UTU37355	430473408700S1
BONANZA 08-03	8	10S	23E	NWNW	U-37355	UTU37355	430473477000S1
BONANZA 09-05	9	10S	23E	SESW	U-37355	UTU37355	430473486600S1
BONANZA 09-06	9	10S	23E	NWNE	U-37355	UTU37355	430473477100S1
BONANZA 10-02	10	10S	23E	NWNW	U72028	UTU80201	430473470400S1
BONANZA 10-03	10	10S	23E	NWNE	UTU38261	CR-5	430473472800S1
BONANZA 10-04	10	10S	23E	SENE	UTU40736	CR-5	430473477200S1
BONANZA 1023-4E	4	10S	23E	SWNW	U-33433		43047353920S1
BONANZA 1023-6C	6	10S	23E	NENW	U-38419	UTU38419	430473515300S1
BONANZA 1023-7B	7	10S	23E	NWNE	U-38420	UTU38420	430473517200S1
BONANZA 1023-7L	7	10S	23E	NWSW	U-38420		430473528900S1
BONANZA 11-02	11	10S	23E	SWNW	UTU38425	CR-23	430473477300S1
BONANZA FEDERAL 03-15	15	10S	23E	NENW	UTU38428	UTU38428	430473127800S1
CANYON VIEW FEDERAL 1-18	18	10S	23E	SENE	UTU38421	UTU38421	430473037900S1
CROOKED CYN FED 1-17	17	10S	23E	NESW	UTU37355	UTU37355	430473036900S1
FLAT MESA FEDERAL 1-7	7	10S	23E	NWSE	UTU38420	UTU38420	430473036500S1
FLAT MESA FEDERAL 2-7	7	10S	23E	SENE	UTU38420	UTU38420	430473054500S1
JACK RABBIT 1-11	11	10S	23E	SWNE	UTU38425	CR-23	430473042300S1
LOOKOUT POINT STATE 1-16	16	10S	23E	NESE	ML22186A		430473054400S1
NO NAME CANYON 1-9	9	10S	23E	SENE	UTU037355	UTU37355	430473037800S1
NO NAME CANYON 2-9	9	10S	23E	NENW	UTU037355	UTU37355	430473150400S1
NSO FEDERAL 1-12	12	10S	23E	NENW	UTU38423	CR-22	430473056000S1
PETE'S FLAT 1-1	1	10S	23E	NESE	UTU40736		430473055800S1
SAGE HEN FEDERAL 1-6	6	10S	23E	NESE	UTU38419	CR-3	430473038200S1
SAGEBRUSH FEDERAL 1-8	8	10S	23E	SWNE	UTU37355	UTU37355	430473038300S1
SHEEPHERDER FEDERAL 1-10	10	10S	23E	NESE	UTU38424	CR-5	430473055900S1
SOUTHMAN CANYON 01-05 FED	5	10S	23E	SENE	UTU33433	UTU74473	430473085600S1
SOUTHMAN CANYON 04-04	4	10S	23E	NWSE	UTU33433	UTU33433	430473063200S1
SOUTHMAN CANYON 04-05	5	10S	23E	NESE	UTU33433	UTU33433	430473063300S1
SOUTHMAN CANYON 09-03M	9	10S	23E	SWSW	UTU37355	UTU37355	430473254100S1
SOUTHMAN CANYON 09-04J	9	10S	23E	NWSE	UTU37355	UTU37355	430473254100S1
SOUTHMAN CANYON 31-01-L	31	09S	23E	NWSW	UTU33433	UTU74898	430473254300S1
SOUTHMAN CANYON 31-02X	31	09S	23E	NWNW	UTU33433	UTU33433	430473489800S1
SOUTHMAN CANYON 31-03	31	09S	23E	SENE	UTU33433	UTU33433	430473472600S1
SOUTHMAN CANYON 31-04	31	09S	23E	SESW	UTU33433		430473472700S1
SOUTHMAN CANYON 923-31B	31	09S	23E	NWNE	U-33433	UTU33433	430473515000S1
SOUTHMAN CANYON 923-31J	31	09S	23E	NWSE	U-33433	UTU33433	430473514900S1
SOUTHMAN CANYON 923-31P	31	09S	23E	SESE	U-33433		430473528800S1
SOUTHMAN CANYON SWD #3	15	10S	23E	NESE	UTU-38427		430471588000S1
WHITE RIVER 1-14	14	10S	23E	NENW	UTU38427	UTU38427	430473048100S1

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

5. Lease Serial No.  
MULTIPLE WELLS- SEE ATTACHED

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.  
MULTIPLE WELLS- SEE ATTACHED

8. Well Name and No.  
MULTIPLE WELLS- SEE ATTACHED

9. API Well No.  
MULTIPLE WELLS- SEE ATTACHED

10. Field and Pool, or Exploratory Area  
MULTIPLE WELLS- SEE ATTACHED

11. County or Parish, State  
UINTAH COUNTY, UTAH

**SUBMIT IN TRIPLICATE – Other instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
WESTPORT OIL & GAS COMPANY, L.P.

3a. Address  
1368 SOUTH 1200 EAST, VERNAL, UTAH 84078

3b. Phone No. (include area code)  
435-781-7060

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
MULTIPLE WELLS- SEE ATTACHED

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input checked="" type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

WESTPORT OIL & GAS COMPANY RESCINDS ANY PREVIOUSLY APPROVED DISPOSAL SITES AND PROPOSES THAT ANY PRODUCED WATER FROM THE ATTACHED LIST OF WELLS WILL BE CONTAINED IN A WATER TANK AND WILL THEN BE HAULED BY TRUCK TO ONE OF THE FOLLOWING PRE-APPROVED DISPOSAL SITES: DALBO, INC.; RNI, SEC. 5-T9S-R22E; ACE OILFIELD, SEC. 2-T6S-R20E; SOUTHMAN CANYON #3 SWD, SEC. 15-T10S-R23E, API NO. 43047158800000S1; AND DIRTY DEVIL FEDERAL 14-10 SWD, SWC. 10-T9S-R24E, API NO. 430473056600S1.

**Accepted by the  
Utah Division of  
Oil, Gas and Mining  
FOR RECORD ONLY**

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) DEBRA DOMENICI	Title ENVIRONMENTAL ASSISTANT
Signature <i>Debra Domenici</i>	Date July 12, 2004

**THIS SPACE FOR FEDERAL OR STATE USE**

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**RECEIVED**

**JUL 14 2004**

**DIV. OF OIL, GAS & MINING**

WELL	LEGALS				STF LEASE NO	CA NUMBER	API NO
	SEC	TWN	RGE	QTR/QTR			
BONANZA 04-06	4	10S	23E	NESW	U-33433	UTU33433	430473475100S1
BONANZA 06-02	6	10S	23E	NESW	UTU38419	UTU38419	430473484300S1
BONANZA 08-02	8	10S	23E	SESE	UTU37355	UTU37355	430473408700S1
BONANZA 08-03	8	10S	23E	NWNW	U-37355	UTU37355	430473477000S1
BONANZA 09-05	9	10S	23E	SESW	U-37355	UTU37355	430473486600S1
BONANZA 09-06	9	10S	23E	NWNE	U-37355	UTU37355	430473477100S1
BONANZA 10-02	10	10S	23E	NWNW	U72028	UTU80201	430473470400S1
BONANZA 10-03	10	10S	23E	NWNE	UTU38261	CR-5	430473472800S1
BONANZA 10-04	10	10S	23E	SENE	UTU40736	CR-5	430473477200S1
BONANZA 1023-2A	2	10S	23E	NENE	ML47062		430473534700S1
BONANZA 1023-2C	2	10S	23E	NENW	ML47062		430473534600S1
BONANZA 1023-2E	2	10S	23E	SWNW	ML47062		430473534500S1
BONANZA 1023-4E	4	10S	23E	SWNW	U-33433		43047353920S1
BONANZA 1023-6C	6	10S	23E	NENW	U-38419	UTU38419	430473515300S1
BONANZA 1023-7B	7	10S	23E	NWNE	U-38420	UTU38420	430473517200S1
BONANZA 1023-7L	7	10S	23E	NWSW	U-38420		430473528900S1
BONANZA 11-02	11	10S	23E	SWNW	UTU38425	CR-23	430473477300S1
BONANZA FEDERAL 03-15	15	10S	23E	NENW	UTU38428	UTU38428	430473127800S1
CANYON VIEW FEDERAL 1-18	18	10S	23E	SENE	UTU38421	UTU38421	430473037900S1
CIGE 008	35	09S	22E	SWSE	UTU010954A	891008900A	430473042700S1
CIGE 009	36	09S	22E	NWSE	ML22650	891008900A	430473041900S1
CIGE 010	2	10S	22E	NWSE	ML22651	891008900A	430473042500S1
CIGE 031	1	10S	22E	SWNW	U011336	891008900A	430473051100S1
CIGE 062D	36	09S	22E	NWSW	ML22650	891008900A	430473088500S1
CIGE 067A	2	10S	22E	NENE	ML22651	891008900A	430473093800S1
CIGE 068D	35	09S	22E	NWSW	UTU010954A	891008900A	430473095100S1
CIGE 089D	34	09S	22E	SENE	UTU0149077	891008900A	430473114600S1
CIGE 105D	1	10S	22E	NENW	U011336	891008900A	430473175800S1
CIGE 118	35	09S	22E	NESE	UTU010954A	891008900A	430473202500S1
CIGE 144	2	10S	22E	SWNE	ML22651	891008900A	430473202200S1
CIGE 147	36	09S	22E	SESW	ML22650	891008900A	430473202000S1
CIGE 153	35	09S	22E	SESW	UTU010954A	891008900A	430473206700S1
CIGE 161	2	10S	22E	SESE	ML22651	891008900A	430473216800S1
CIGE 162	36	09S	22E	SESE	ML22650	891008900A	430473216400S1
CIGE 186	35	09S	22E	NWSE	UTU010954A	891008900A	430473259000S1
CIGE 193	35	09S	22E	SESE	UTU010954A	891008900A	430473297300S1
CIGE 194	1	10S	22E	SWNW	U011336	891008900A	430473293200S1
CIGE 195	2	10S	22E	NWNE	ML22651	891008900A	430473279700S1
CIGE 212	34	09S	22E	NENE	UTU0149077	891008900A	430473293800S1
CIGE 221	36	09S	22E	SWSW	ML22650	891008900A	430473286800S1
CIGE 222	36	09S	22E	NESW	ML22650	891008900A	430473286900S1
CIGE 223	1	10S	22E	NWNW	U011336	891008900A	430473298300S1
CLIFF EDGE 1-15	15	10S	23E	NWSE	UTU38427	UTU38427	430473046200S1
CROOKED CYN FED 1-17	17	10S	23E	NESW	UTU37355	UTU37355	430473036900S1
FLAT MESA FEDERAL 1-7	7	10S	23E	NWSE	UTU38420	UTU38420	430473036500S1
FLAT MESA FEDERAL 2-7	7	10S	23E	SENE	UTU38420	UTU38420	430473054500S1
JACK RABBIT 1-11	11	10S	23E	SWNE	UTU38425	CR-23	430473042300S1
LOOKOUT POINT STATE 1-16	16	10S	23E	NESE	ML22186A		430473054400S1
NBU 024N2	12	10S	22E	SESE	U01197A	891008900A	430473053500S1
NBU 038N2	13	10S	22E	NWSW	U06512	891008900A	430473053600S1
NBU 1022-1G	1	10S	22E	SWNE	U-11336	891008900A	430473517500S1
NBU 922-35K	35	09S	22E	NESW	UTU-010954A	891008900A	430473512600S1
NBU 922-36I	36	09S	22E	NESE	ML-22650	891008900A	430473510700S1
NO NAME CANYON 1-9	9	10S	23E	SENE	UTU037355	UTU37355	430473037800S1
NO NAME CANYON 2-9	9	10S	23E	NENW	UTU037355	UTU37355	430473150400S1
NSO FEDERAL 1-12	12	10S	23E	NENW	UTU38423	CR-22	430473056000S1
PETE'S FLAT 1-1	1	10S	23E	NESE	UTU40736		430473055800S1
SAGE HEN FEDERAL 1-6	6	10S	23E	NESE	UTU38419	CR-3	430473038200S1
SAGEBRUSH FEDERAL 1-8	8	10S	23E	SWNE	UTU37355	UTU37355	430473038300S1
SHEEPHERDER FEDERAL 1-10	10	10S	23E	NESE	UTU38424	CR-5	430473055900S1
SOUTHMAN CANYON 01-05 FED	5	10S	23E	SENE	UTU33433	UTU74473	430473085600S1

WELL	LEGALS				STF LEASE NO	CA NUMBER	API NO
	SEC	TWN	RGE	QTR/QTR			
SOUTHMAN CANYON 04-04	4	10S	23E	NWSE	UTU33433	UTU33433	430473063200S1
SOUTHMAN CANYON 04-05	5	10S	23E	NESE	UTU33433	UTU33433	430473063300S1
SOUTHMAN CANYON 09-03M	9	10S	23E	SWSW	UTU37355	UTU37355	430473254000S1
SOUTHMAN CANYON 09-04J	9	10S	23E	NWSE	UTU37355	UTU37355	430473254100S1
SOUTHMAN CANYON 31-01-L	31	09S	23E	NWSW	UTU33433	UTU74898	430473254300S1
SOUTHMAN CANYON 31-02X	31	09S	23E	NWNW	UTU33433	UTU33433	430473489800S1
SOUTHMAN CANYON 31-03	31	09S	23E	SENW	UTU33433	UTU33433	430473472600S1
SOUTHMAN CANYON 31-04	31	09S	23E	SESW	UTU33433		430473472700S1
SOUTHMAN CANYON 923-31B	31	09S	23E	NWNE	U-33433	UTU33433	430473515000S1
SOUTHMAN CANYON 923-31J	31	09S	23E	NWSE	U-33433	UTU33433	430473514900S1
SOUTHMAN CANYON 923-31P	31	09S	23E	SESE	U-33433		430473528800S1
SOUTHMAN CANYON SWD #3	15	10S	23E	NESE	UTU-38427		430471588000S1
WHITE RIVER 1-14	14	10S	23E	NENW	UTU38427	UTU38427	430473048100S1

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

**SUBMIT IN TRIPLICATE – Other instructions on reverse side**

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No.- MULTIPLE WELLS- SEE ATTACHED
2. Name of Operator WESTPORT OIL & GAS COMPANY, L.P.		6. If Indian, Allottee or Tribe Name
3a. Address 1368 SOUTH 1200 EAST, VERNAL, UTAH 84078	3b. Phone No. (include area code) 435-781-7060	7. If Unit or CA/Agreement, Name and/or No. MULTIPLE WELLS- SEE ATTACHED
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) MULTIPLE WELLS- SEE ATTACHED		8. Well Name and No. MULTIPLE WELLS- SEE ATTACHED
		9. API Well No. MULTIPLE WELLS- SEE ATTACHED
		10. Field and Pool, or Exploratory Area MULTIPLE WELLS- SEE ATTACHED
		11. County or Parish, State UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input checked="" type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input type="checkbox"/> Other _____

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

Westport Oil & Gas Company rescinds any previously approved disposal sites and proposes that any produced water from the attached list of wells on Exhibit A will be contained in a water tank and will then be hauled by truck to one of the following pre-approved disposal sites: Dalbo, Inc. Disposal Pit; RNI Disposal Pit, Sec. 5-T9S-R22E; Ace Oilfield Disposal, Sec. 2-T6S-R20E; Southman Canyon #3 SWD, Sec. 15-T10S-R23E, API No. 43047158800000S1 CIGE 9 SWD, Sec. 36-T9S-R22E; and Dirty Devil Federal 14-10 SWD, Sec. 10-T9S-R24E, API No. 430473056600S1. The disposal/emergency pits for the locations listed on Exhibit B will be reclaimed within the 2004 year. The rest of the locations that have disposal/emergency pits which are listed on Exhibit C will have their pits reclaimed by September 2008.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) DEBRA DOMENICI	Title ENVIRONMENTAL ASSISTANT
Signature <i>Debra Domenici</i>	Date July 22, 2004

**RECEIVED**  
JUL 27 2004  
DIV. OF OIL, GAS & MINING

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

**Accepted by the**  
**Utah Division of**  
**Oil, Gas and Mining**  
**FOR RECORD ONLY**

## EXHIBIT A

WELL	LEGALS				STF LEASE NO	CA NUMBER	API NO
	SEC	TWN	RGE	QTR/QTR			
BONANZA 04-06	4	10S	23E	NESW	U-33433	UTU33433	430473475100S1
BONANZA 06-02	6	10S	23E	NESW	UTU38419	UTU38419	430473484300S1
BONANZA 08-02	8	10S	23E	SESE	UTU37355	UTU37355	430473408700S1
BONANZA 08-03	8	10S	23E	NWNW	U-37355	UTU37355	430473477000S1
BONANZA 09-05	9	10S	23E	SESW	U-37355	UTU37355	430473486600S1
BONANZA 09-06	9	10S	23E	NWNE	U-37355	UTU37355	430473477100S1
BONANZA 10-02	10	10S	23E	NWNW	U72028	UTU80201	430473470400S1
BONANZA 10-03	10	10S	23E	NWNE	UTU38261	CR-5	430473472800S1
BONANZA 10-04	10	10S	23E	SENE	UTU40736	CR-5	430473477200S1
BONANZA 1023-2A	2	10S	23E	NENE	ML47062		430473534700S1
BONANZA 1023-2C	2	10S	23E	NENW	ML47062		430473534600S1
BONANZA 1023-2E	2	10S	23E	SWNW	ML47062		430473534500S1
BONANZA 1023-4E	4	10S	23E	SWNW	U-33433		43047353920S1
BONANZA 1023-6C	6	10S	23E	NENW	U-38419	UTU38419	430473515300S1
BONANZA 1023-7B	7	10S	23E	NWNE	U-38420	UTU38420	430473517200S1
BONANZA 1023-7L	7	10S	23E	NWSW	U-38420		430473528900S1
BONANZA 11-02	11	10S	23E	SWNW	UTU38425	CR-23	430473477300S1
BONANZA FEDERAL 03-15	15	10S	23E	NENW	UTU38428	UTU38428	430473127800S1
CANYON VIEW FEDERAL 1-18	18	10S	23E	SENE	UTU38421	UTU38421	430473037900S1
CIGE 008	35	09S	22E	SWSE	UTU010954A	891008900A	430473042700S1
CIGE 009	36	09S	22E	NWSE	ML22650	891008900A	430473041900S1
CIGE 010	2	10S	22E	NWSE	ML22651	891008900A	430473042500S1
CIGE 031	1	10S	22E	SWNW	U011336	891008900A	430473051100S1
CIGE 062D	36	09S	22E	NWSW	ML22650	891008900A	430473088500S1
CIGE 067A	2	10S	22E	NENE	ML22651	891008900A	430473093800S1
CIGE 068D	35	09S	22E	NWSW	UTU010954A	891008900A	430473095100S1
CIGE 089D	34	09S	22E	SENE	UTU0149077	891008900A	430473114600S1
CIGE 105D	1	10S	22E	NENW	U011336	891008900A	430473175800S1
CIGE 118	35	09S	22E	NESE	UTU010954A	891008900A	430473202500S1
CIGE 144	2	10S	22E	SWNE	ML22651	891008900A	430473202200S1
CIGE 147	36	09S	22E	SESW	ML22650	891008900A	430473202000S1
CIGE 153	35	09S	22E	SESW	UTU010954A	891008900A	430473206700S1
CIGE 161	2	10S	22E	SESE	ML22651	891008900A	430473216800S1
CIGE 162	36	09S	22E	SESE	ML22650	891008900A	430473216400S1
CIGE 186	35	09S	22E	NWSE	UTU010954A	891008900A	430473259000S1
CIGE 193	35	09S	22E	SESE	UTU010954A	891008900A	430473297300S1
CIGE 194	1	10S	22E	SWNW	U011336	891008900A	430473293200S1
CIGE 195	2	10S	22E	NWNE	ML22651	891008900A	430473279700S1
CIGE 212	34	09S	22E	NENE	UTU0149077	891008900A	430473293800S1
CIGE 221	36	09S	22E	SWSW	ML22650	891008900A	430473286800S1
CIGE 222	36	09S	22E	NESW	ML22650	891008900A	430473286900S1
CIGE 223	1	10S	22E	NWNW	U011336	891008900A	430473298300S1
CLIFF EDGE 1-15	15	10S	23E	NWSE	UTU38427	UTU38427	430473046200S1
CROOKED CYN FED 1-17	17	10S	23E	NESW	UTU37355	UTU37355	430473036900S1
FLAT MESA FEDERAL 1-7	7	10S	23E	NWSE	UTU38420	UTU38420	430473036500S1
FLAT MESA FEDERAL 2-7	7	10S	23E	SENE	UTU38420	UTU38420	430473054500S1
JACK RABBIT 1-11	11	10S	23E	SWNE	UTU38425	CR-23	430473042300S1
LOOKOUT POINT STATE 1-16	16	10S	23E	NESE	ML22186A		430473054400S1
NBU 024N2	12	10S	22E	SESE	U01197A	891008900A	430473053500S1
NBU 038N2	13	10S	22E	NWSW	U06512	891008900A	430473053600S1
NBU 1022-1G	1	10S	22E	SWNE	U-11336	891008900A	430473517500S1
NBU 922-35K	35	09S	22E	NESW	UTU-010954A	891008900A	430473512600S1
NBU 922-36I	36	09S	22E	NESE	ML-22650	891008900A	430473510700S1
NO NAME CANYON 1-9	9	10S	23E	SENE	UTU037355	UTU37355	430473037800S1
NO NAME CANYON 2-9	9	10S	23E	NENW	UTU037355	UTU37355	430473150400S1
NSO FEDERAL 1-12	12	10S	23E	NENW	UTU38423	CR-22	430473056000S1
PETE'S FLAT 1-1	1	10S	23E	NESE	UTU40736		430473055800S1
SAGE HEN FEDERAL 1-6	6	10S	23E	NESE	UTU38419	CR-3	430473038200S1
SAGEBRUSH FEDERAL 1-8	8	10S	23E	SWNE	UTU37355	UTU37355	430473038300S1
SHEEPHERDER FEDERAL 1-10	10	10S	23E	NESE	UTU38424	CR-5	430473055900S1
SOUTHMAN CANYON 01-05 FED	5	10S	23E	SENE	UTU33433	UTU74473	430473085600S1

EXHIBIT B  
PITS TO BE RECLAIMED IN 2004

WELL	LEGALS				STF LEASE NO	CA NUMBER	API NO
	SEC	TWN	RGE	QTR/QTR			
CIGE 008	35	09S	22E	SWSE	UTU010954A	891008900A	430473042700S1
CIGE 062D	36	09S	22E	NWSW	ML22650	891008900A	430473088500S1
CIGE 153	35	09S	22E	SESW	UTU010954A	891008900A	430473206700S1

EXHIBIT C  
PITS TO BE RECLAIMED BY SEPTEMBER, 2008

WELL	LEGALS				STF LEASE NO	CA NUMBER	API NO
	SEC	TWN	RGE	QTR/QTR			
CIGE 008	35	09S	22E	SWSE	UTU010954A	891008900A	430473042700S1
CIGE 009	36	09S	22E	NWSE	ML22650	891008900A	430473041900S1
CIGE 010	2	10S	22E	NWSE	ML22651	891008900A	430473042500S1
CIGE 031	1	10S	22E	SWNW	U011336	891008900A	430473051100S1
CIGE 062D	36	09S	22E	NWSW	ML22650	891008900A	430473088500S1
CIGE 067A	2	10S	22E	NENE	ML22651	891008900A	430473093800S1
CIGE 068D	35	09S	22E	NWSW	UTU010954A	891008900A	430473095100S1
CIGE 089D	34	09S	22E	SENE	UTU0149077	891008900A	430473114600S1
CIGE 105D	1	10S	22E	NENW	U011336	891008900A	430473175800S1
CIGE 118	35	09S	22E	NESE	UTU010954A	891008900A	430473202500S1
CIGE 144	2	10S	22E	SWNE	ML22651	891008900A	430473202200S1
CIGE 153	35	09S	22E	SESW	UTU010954A	891008900A	430473206700S1
CIGE 161	2	10S	22E	SESE	ML22651	891008900A	430473216800S1
CIGE 162	36	09S	22E	SESE	ML22650	891008900A	430473216400S1
NBU 024N2	12	10S	22E	SESE	U01197A	891008900A	430473053500S1
NBU 038N2	13	10S	22E	NWSW	U06512	891008900A	430473053600S1

WELL	LEGALS				STF LEASE NO	CA NUMBER	API NO
	SEC	TWN	RGE	QTR/QTR			
SOUTHMAN CANYON 04-04	4	10S	23E	NWSE	UTU33433	UTU33433	430473063200S1
SOUTHMAN CANYON 04-05	5	10S	23E	NESE	UTU33433	UTU33433	430473063300S1
SOUTHMAN CANYON 09-03M	9	10S	23E	SWSW	UTU37355	UTU37355	430473254000S1
SOUTHMAN CANYON 09-04J	9	10S	23E	NWSE	UTU37355	UTU37355	430473254100S1
SOUTHMAN CANYON 31-01-L	31	09S	23E	NWSW	UTU33433	UTU74898	430473254300S1
SOUTHMAN CANYON 31-02X	31	09S	23E	NWNW	UTU33433	UTU33433	430473489800S1
SOUTHMAN CANYON 31-03	31	09S	23E	SESW	UTU33433	UTU33433	430473472600S1
SOUTHMAN CANYON 31-04	31	09S	23E	SESW	UTU33433		430473472700S1
SOUTHMAN CANYON 923-31B	31	09S	23E	NWNE	U-33433	UTU33433	430473515000S1
SOUTHMAN CANYON 923-31J	31	09S	23E	NWSE	U-33433	UTU33433	430473514900S1
SOUTHMAN CANYON 923-31P	31	09S	23E	SESE	U-33433		430473528800S1
SOUTHMAN CANYON SWD #3	15	10S	23E	NESE	UTU-38427		430471588000S1
WHITE RIVER 1-14	14	10S	23E	NENW	UTU38427	UTU38427	430473048100S1

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

5. Lease Serial No.  
U-33433

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

8. Well Name and No.  
**SOUTHMAN CANYON 31-2X**

9. API Well No.  
43-047-34898

10. Field and Pool, or Exploratory Area  
NATURAL BUTTES

11. County or Parish, State  
UINTAH, UTAH

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
WESTPORT OIL & GAS COMPANY L.P.

3a. Address  
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)  
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
NWNW SECTION 31-T9S-R23E 733'FNL & 836'FWL

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**


TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize <input type="checkbox"/> Deepen <input type="checkbox"/> Production (Start/Resume) <input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing <input type="checkbox"/> Fracture Treat <input type="checkbox"/> Reclamation <input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair <input type="checkbox"/> New Construction <input type="checkbox"/> Recomplete <input checked="" type="checkbox"/> Other <u>CSG LEAK</u>
	<input type="checkbox"/> Change Plans <input type="checkbox"/> Plug and Abandon <input type="checkbox"/> Temporarily Abandon <u>SQZ</u>
	<input type="checkbox"/> Convert to Injection <input type="checkbox"/> Plug Back <input type="checkbox"/> Water Disposal

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

THE SUBJECT WELL LOCATION WAS LOGGED OFF SUDDENLY AND FOR NO APPARENT REASON ON DECEMBER 31, 2005. THE OPERATOR SWABBED FOR FIVE DAYS STARTING ON JANUARY 5, 2006, THE OPERATOR COULD NOT SWAB FLUID LEVEL DOWN. THE OPERATOR TESTED THE CASING WITH PACKER AT 6490' AND DISCOVERED THE CASING LEAK. THE OPERATOR REPAIRED THE CASING LEAK.

PLEASE SEE THE ATTACHED CASING LEAK JOB PERFORMED ON THE SUBJECT WELL LOCATION.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) Sheila Upchego Title Regulatory Analyst  
 Signature  Date February 1, 2006

**THIS SPACE FOR FEDERAL OR STATE USE**

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Office \_\_\_\_\_

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

**RECEIVED**  
**FEB 03 2006**

WESTPORT OIL & GAS COMPANY, LP

CHRONOLOGICAL HISTORY

SOUTHMAN CANYON 31-2X

Page 1

UINTAH COUNTY, UT

LOE WORK

- 01/13/06      PROG: ROAD RIG FROM BONANZA 1023-7P TO LOCATION. SPOT RIG & EQUIP. RU RIG, PREP TO PULL TNG ON MONDAY. SDFWE.
- 01/16/06      PROG: 0# ON WL. ND TREE, NU BOP. RIH TAG FILL @ 8212'. POOH. (SLM) TBG SCALE UP, BAD RUN BACK IN HOLE WO TRAILER TO LD TBG. HELD SAFETY MEETING, DISCUSSION ON FALLING OBJECTS. SPOT IN TRAILER, LD SCALED TBG, SWI SDFN.
- 01/17/06      PROG: TALLY & PU 2-3/8 YELLOW BAND TBG. MIRU AIR FOAM UNIT, BRK CIRC @ 5000'. PU RIH TAG @ 7855'. RU SWIVEL SPOT 8 BBL 15% HCL, CLEAN OUT W/AIR FOAM TO 7870' 15' HARD SCALE, RIH TAG FILL @ 8212', CLEAN OUT. FILL TO 8230', TBG BECAME STUCK, LOST RETURNS. TRY TO WORK FREE, COULD NOT. SDFN.
- 01/18/06      PROG: WORK STUCK, TBG COULD NOT WORK FREE. MIRU WEATHERFORD WIRE LINE, RIH W/CHEMICAL CUTTER, CUT OFF @ 404' 13' ABOVE STRING FLOAT. POOH. LD, CUT OFF, PU WASH PIPE & OUTSIDE CUTTER, RIH CUT ON TBG. TBG CAME APART, BLEW OUT OF HOLE, DAMAGE TO RIG, TBG BOARD. NO INJURIES. SDFN.
- 01/19/06      PROG: RD, REMOVE TBG BOARD F/DERRICK FOR REPAIR, SHUT DN FOR REPAIRS.
- 01/25/06      PROG: PU 13 JTS 2-3/8 RIH LATCH FISH. PU ON FISH, FREE. POOH. LD FISH, PU PLUG & PKR. RIH, SDFN. EOT @ 6500'.
- 01/26/06      PROG: SET PLUG @ 6504' TEST PLUG TO 1000# GOOD TEST SET PKR @ 6490' TEST CSG INJ RATE 1 BPM @ 600# REL PKR POOH TO ISOLATE LEAK @ 3104'-3135' INJ RT 1 BPM @ 700# RIH SPOT 2 SK SD ON RBP @ 6504' POOH. MAKE UP CMT RET RIH SET @ 2847' MIRU BIG 4 MIX & PMP 100 SKS STAGE LAST 40 SKS SQUEEZE TO 1000# STING OUT OF RET POOH. SDFN WOC
- 01/27/06      PROG: MAKE UP BIT RIH W/2-3/8 TBG. DRL OUT CMT RET IN 45 MIN. DRL CMT F/2847' TO 3006' 150' IN 6 HRS, 25 PH. POOH W/20 JTS EOT 2360'. SDFWE.
- 01/30/06      PROG: RIH, PU SWIVEL. DRL OUT CMT F/3000' TO 3135' (FELL OUT OF CMT). CIRC CLEAN, TEST CSG TO 500#, GOOD TEST. RIH TO 4000. SWAB DN TO 3000' FOR NEGATIVE TEST REC 30-BBL-FLUID. SDFN.
- 01/31/06      PROG: SWAB FLUID DN FOR NEGATIVE TEST, REC 22 BBL FL 3300', NO FLUID ENTRY. RIH CIRC SD OFF RBP. POOH. PU RET HEAD. RIH LATCH RBP & REL. POOH 20 JTS 2-3/8 SDFN.

Division of Oil, Gas and Mining  
**OPERATOR CHANGE WORKSHEET**

**ROUTING**

1. DJJ
2. CDW

**X Change of Operator (Well Sold)**

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

**1/6/2006**

<b>FROM:</b> (Old Operator): N2115-Westport Oil & Gas Co., LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024	<b>TO:</b> ( New Operator): N2995-Kerr-McGee Oil & Gas Onshore, LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024
---	--

**CA No.**

**Unit:**

WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
-----------	-----	-----	-----	--------	-----------	------------	-----------	-------------

**OPERATOR CHANGES DOCUMENTATION**

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 5/10/2006
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 5/10/2006
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- 4a. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- 4b. If **NO**, the operator was contacted on: \_\_\_\_\_
- 5a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- 5b. Inspections of LA PA state/fee well sites complete on: n/a
- 5c. Reports current for Production/Disposition & Sundries on: ok
- 6. Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 3/27/2006 BIA not yet
- 7. Federal and Indian Units:**  
The BLM or BIA has approved the successor of unit operator for wells listed on: 3/27/2006
- 8. Federal and Indian Communization Agreements ("CA"):**  
The BLM or BIA has approved the operator for all wells listed within a CA on: n/a
- 9. Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: \_\_\_\_\_

**DATA ENTRY:**

- Changes entered in the **Oil and Gas Database** on: 5/15/2006
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 5/15/2006
- Bond information entered in RBDMS on: 5/15/2006
- Fee/State wells attached to bond in RBDMS on: 5/16/2006
- Injection Projects to new operator in RBDMS on: \_\_\_\_\_
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a Name Change Only

**BOND VERIFICATION:**

- Federal well(s) covered by Bond Number: CO1203
- Indian well(s) covered by Bond Number: RLB0005239
- (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0005236
- a. The **FORMER** operator has requested a release of liability from their bond on: n/a rider added KMG  
The Division sent response by letter on: \_\_\_\_\_

**LEASE INTEREST OWNER NOTIFICATION:**

- (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 5/16/2006

**COMMENTS:**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
**KERR-McGEE OIL & GAS ONSHORE LP**

3a. Address  
**1368 SOUTH 1200 EAST VERNAL, UT 84078**

3b. Phone No. (include area code)  
**(435) 781-7024**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**SEE ATTACHED**

5. Lease Serial No.  
**MULTIPLE LEASES**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.  
**MUTIPLE WELLS**

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State  
**UINTAH COUNTY, UTAH**

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

PLEASE BE ADVISED THAT KERR-McGEE OIL & GAS ONSHORE LP, IS CONSIDERED TO BE THE OPERATOR OF THE ATTACHED WELL LOCATIONS. EFFECTIVE JANUARY 6, 2006.  
 KERR-McGEE OIL & GAS ONSHORE LP, IS RESPONSIBLE UNDER TERMS AND CONDITIONS OF THE LEASE(S) FOR THE OPERATIONS CONDUCTED UPON LEASE LANDS. BOND COVERAGE IS PROVIDED BY STATE OF UTAH NATIONWIDE BOND NO. RLB0005237.

**RECEIVED**

**MAY 10 2006**

DIV. OF OIL, GAS & MINING

*BLM BOND = C01203*  
*BIA BOND = RLB0005239*

**APPROVED 5116106**

*Earlene Russell*

**Division of Oil, Gas and Mining**  
**Earlene Russell, Engineering Technician**

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) <b>RANDY BAYNE</b>	Title <b>DRILLING MANAGER</b>
Signature <i>Randy Bayne</i>	Date <b>May 9, 2006</b>

**THIS SPACE FOR FEDERAL OR STATE USE**

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

5. Lease Serial No.

**MULTIPLE LEASES**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well

Oil Well  Gas Well  Other

8. Well Name and No.

**MUTIPLE WELLS**

2. Name of Operator

**WESTPORT OIL & GAS COMPANY L.P.**

9. API Well No.

3a. Address

**1368 SOUTH 1200 EAST VERNAL, UT 84078**

3b. Phone No. (include area code)

**(435) 781-7024**

10. Field and Pool, or Exploratory Area

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

**SEE ATTACHED**

11. County or Parish, State

**UINTAH COUNTY, UTAH**

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

EFFECTIVE JANUARY 6, 2006, WESTPORT OIL & GAS COMPANY L.P., HAS RELINQUISHED THE OPERATORSHIP OF THE ATTACHED WELL LOCATIONS TO KERR-McGEE OIL & GAS ONSHORE LP.

**APPROVED** 5/16/06  
*Earlene Russell*  
Division of Oil, Gas and Mining  
Earlene Russell, Engineering Technician

RECEIVED  
MAY 10 2006

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)	Title
<b>BRAD LANEY</b>	<b>ENGINEERING SPECIALIST</b>
Signature	Date
<i>Brad Laney</i>	<b>May 9, 2006</b>

**THIS SPACE FOR FEDERAL OR STATE USE**

Approved by	Title	Date
<i>Brad Laney</i>		<b>5-9-06</b>
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



## United States Department of the Interior

BUREAU OF LAND MANAGEMENT  
Colorado State Office  
2850 Youngfield Street  
Lakewood, Colorado 80215-7076

IN REPLY REFER TO:

CO922 (MM)  
3106  
COC017387 et. al.

March 23, 2006

### NOTICE

Kerr-McGee Oil & Gas Onshore L.P. :  
1999 Broadway, Suite 3700 : Oil & Gas  
Denver, CO 80202 :

#### Merger/Name Change - Recognized

On February 28, 2006 this office received acceptable evidence of the following mergers and name conversion:

Kerr-McGee Oil & Gas Onshore L.P., a Delaware Limited Partnership, and Kerr-McGee Oil & Gas Onshore LLC, a Delaware Limited Partnership merger with and into Westport Oil and Gas Company L.P., a Delaware Limited Partnership, and subsequent Westport Oil & Gas Company L.P. name conversion to Kerr-McGee Oil & Gas Onshore L.P.

For our purposes the merger and name conversion was effective January 4, 2006, the date the Secretary of State of Delaware authenticated the mergers and name conversion.

Kerr-McGee Oil & Gas Onshore L.P. provided a list of oil and gas leases held by the merging parties with the request that the Bureau of Land Management change all their lease records from the named entities to the new entity, Kerr-McGee Oil & Gas Onshore L.P. In response to this request each state is asked to retrieve their own list of leases in the names of these entities from the Bureau of Land Management's (BLM) automated LR2000 data base.

The oil and gas lease files identified on the list provided by Kerr-McGee Oil & Gas Onshore L.P. have been updated as to the merger and name conversion. We have not abstracted the lease files to determine if the entities affected by the acceptance of these documents holds an interest in the lease, nor have we attempt to identify leases where the entity is the operator on the ground that maintains vested record title or operating rights interests. If additional documentation, for change of operator, is required you will be contacted directly by the appropriate Field Office. The Mineral Management Services (MMS) and other applicable BLM offices were notified of the merger with a copy of this notice

Please contact this office if you identify additional leases where the merging party maintains an interest, under our jurisdiction, and we will document the case files with a copy of this notice. If the leases are under the jurisdiction of another State Office that information will be forwarded to them for their action.

Three riders accompanied the merger/name conversion documents which will add Kerr-McGee Oil and Gas Onshore LLC as a principal to the 3 Kerr-McGee bonds maintained by the Wyoming State Office. These riders will be forward to them for their acceptance.

The Nationwide Oil & Gas Continental Casualty Company Bond #158626364 (BLM Bond #CO1203), maintained by the Colorado State Office, will remain in full force and effect until an assumption rider is accepted by the Wyoming State Office that conditions their Nationwide Safeco bond to accept all outstanding liability on the oil and gas leases attached to the Colorado bond.

If you have questions about this action you may call me at 303.239.3768.

/s/Martha L. Maxwell  
Martha L. Maxwell  
Land Law Examiner  
Fluid Minerals Adjudication

Attachment:

List of OG Leases to each of the following offices:

MMS MRM, MS 357B-1

WY, UT, NM/OK/TX, MT/ND, WY State Offices

CO Field Offices

Wyoming State Office

Rider #1 to Bond WY2357

Rider #2 to Bond WY1865

Rider #3 to Bond WY1127



# United States Department of the Interior



BUREAU OF LAND MANAGEMENT  
Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155  
<http://www.blm.gov>

IN REPLY REFER TO:  
3106  
(UT-922)

March 27, 2006

## Memorandum

To: Vernal Field Office

From: Chief, Branch of Fluid Minerals

Subject: Merger Approval

Attached is an approved copy of the merger recognized by the Bureau of Land Management, Colorado State Office. We have updated our records to reflect the merger from Westport Oil and Gas Company L.P. into Kerr-McGee Onshore Oil and Gas Company. The merger was approved effective January 4, 2006.

Chief, Branch of  
Fluid Minerals

## Enclosure

Approval letter from BLM COSO (2 pp)

cc: MMS, Reference Data Branch, James Sykes, PO Box 25165, Denver CO 80225  
State of Utah, DOGM, Attn: Earlene Russell, PO Box 145801, SLC UT 84114  
Teresa Thompson  
Joe Incardine  
Connie Seare  
Dave Mascarenas  
Susan Bauman

RECEIVED

MAR 28 2006

U.S. DEPT. OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 6

**ENTITY ACTION FORM**

Operator: KERR MCGEE OIL & GAS ONSHORE LP Operator Account Number: N 2995  
 Address: P.O. Box 173779  
city DENVER  
state CO zip 80217 Phone Number: (720) 929-6029

**Well 1**

API Number	Well Name		QQ	Sec	Twp	Rng	County
See Atchmt	See Atchmt						
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
	99999	18519				5/11/2012	
<b>Comments:</b> Please see attachment with list of Wells in the Ponderosa Unit. <u>W5MVD</u>							5/30/2012

**Well 2**

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
<b>Comments:</b>							

**Well 3**

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
<b>Comments:</b>							

**ACTION CODES:**

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

**RECEIVED**

**MAY 21 2012**

Div. of Oil, Gas & Mining

Cara Mahler

Name (Please Print)

Signature

REGULATORY ANALYST

5/21/2012

Title

Date

well_name	sec	twp	rng	api	entity	lease	well	stat	qtr_qtr	bhl	surf	zone	a_stat	l_num	op_no
SOUTHMAN CANYON 31-3	31	090S	230E	4304734726	13717	1	GW	P	SENW		1	WSMVD	P	U-33433	N2995
SOUTHMAN CANYON 31-4	31	090S	230E	4304734727	13742	1	GW	S	SESW		1	WSMVD	S	UTU-33433	N2995
SOUTHMAN CYN 31-2X (RIG SKID)	31	090S	230E	4304734898	13755	1	GW	P	NWNW		1	WSMVD	P	U-33433	N2995
SOUTHMAN CYN 923-31J	31	090S	230E	4304735149	13994	1	GW	P	NWSE		1	MVRD	P	U-33433	N2995
SOUTHMAN CYN 923-31B	31	090S	230E	4304735150	13953	1	GW	P	NWNE		1	MVRD	P	U-33433	N2995
SOUTHMAN CYN 923-31P	31	090S	230E	4304735288	14037	1	GW	P	SESE		1	WSMVD	P	UTU-33433	N2995
SOUTHMAN CYN 923-31H	31	090S	230E	4304735336	14157	1	GW	P	SENE		1	WSMVD	P	U-33433	N2995
SOUTHMAN CYN 923-31O	31	090S	230E	4304737205	16827	1	GW	P	SWSE		1	MVRD	P	UTU-33433	N2995
SOUTHMAN CYN 923-31K	31	090S	230E	4304737206	16503	1	GW	P	NESW		1	WSMVD	P	UTU-33433	N2995
SOUTHMAN CYN 923-31G	31	090S	230E	4304737208	16313	1	GW	P	SWNE		1	WSMVD	P	UTU-33433	N2995
SOUTHMAN CYN 923-31E	31	090S	230E	4304737209	16521	1	GW	P	SWNW		1	WSMVD	P	UTU-33433	N2995
SOUTHMAN CYN 923-31A	31	090S	230E	4304737210	16472	1	GW	P	NENE		1	WSMVD	P	UTU-33433	N2995
SOUTHMAN CYN 923-31C	31	090S	230E	4304737227	16522	1	GW	P	NENW		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-1G	01	100S	230E	4304735512	14458	1	GW	P	SWNE		1	WSMVD	P	U-40736	N2995
BONANZA 1023-1A	01	100S	230E	4304735717	14526	1	GW	P	NENE		1	WSMVD	P	U-40736	N2995
BONANZA 1023-1E	01	100S	230E	4304735745	14524	1	GW	P	SWNW		1	WSMVD	P	U-40736	N2995
BONANZA 1023-1C	01	100S	230E	4304735754	14684	1	GW	P	NENW		1	MVRD	P	U-40736	N2995
BONANZA 1023-1K	01	100S	230E	4304735755	15403	1	GW	P	NESW		1	MVRD	P	U-38423	N2995
BONANZA 1023-1F	01	100S	230E	4304737379	16872	1	GW	P	SENW		1	MVRD	P	UTU-40736	N2995
BONANZA 1023-1B	01	100S	230E	4304737380	16733	1	GW	P	NWNE		1	MVRD	P	UTU-40736	N2995
BONANZA 1023-1D	01	100S	230E	4304737381	16873	1	GW	P	NWNW		1	MVRD	P	UTU-40736	N2995
BONANZA 1023-1H	01	100S	230E	4304737430	16901	1	GW	P	SENE		1	MVRD	P	UTU-40736	N2995
BONANZA 1023-1L	01	100S	230E	4304738300	16735	1	GW	P	NWSW		1	MVRD	P	UTU-38423	N2995
BONANZA 1023-1J	01	100S	230E	4304738302	16871	1	GW	P	NWSE		1	MVRD	P	UTU-40736	N2995
BONANZA 1023-1I	01	100S	230E	4304738810	16750	1	GW	P	NESE		1	MVRD	P	UTU-40736	N2995
BONANZA 1023-2E	02	100S	230E	4304735345	14085	3	GW	P	SWNW		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2C	02	100S	230E	4304735346	14084	3	GW	P	NENW		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2A	02	100S	230E	4304735347	14068	3	GW	P	NENE		3	MVRD	P	ML-47062	N2995
BONANZA 1023-2G	02	100S	230E	4304735661	14291	3	GW	P	SWNE		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2O	02	100S	230E	4304735662	14289	3	GW	P	SWSE		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2I	02	100S	230E	4304735663	14290	3	GW	S	NESE		3	WSMVD	S	ML-47062	N2995
BONANZA 1023-2MX	02	100S	230E	4304736092	14730	3	GW	P	SWSW		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2H	02	100S	230E	4304737093	16004	3	GW	P	SENE		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2D	02	100S	230E	4304737094	15460	3	GW	P	NWNW		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2B	02	100S	230E	4304737095	15783	3	GW	P	NWNE		3	MVRD	P	ML-47062	N2995
BONANZA 1023-2P	02	100S	230E	4304737223	15970	3	GW	P	SESE		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2N	02	100S	230E	4304737224	15887	3	GW	P	SESW		3	MVRD	P	ML-47062	N2995
BONANZA 1023-2L	02	100S	230E	4304737225	15833	3	GW	P	NWSW		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2F	02	100S	230E	4304737226	15386	3	GW	P	SENW		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2D-4	02	100S	230E	4304738761	16033	3	GW	P	NWNW		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2O-1	02	100S	230E	4304738762	16013	3	GW	P	SWSE		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2H3CS	02	100S	230E	4304750344	17426	3	GW	P	NWNE	D	3	MVRD	P	ML 47062	N2995
BONANZA 1023-2G3BS	02	100S	230E	4304750345	17428	3	GW	P	NWNE	D	3	MVRD	P	ML 47062	N2995
BONANZA 1023-2G2CS	02	100S	230E	4304750346	17429	3	GW	P	NWNE	D	3	MVRD	P	ML 47062	N2995
BONANZA 1023-2G1BS	02	100S	230E	4304750347	17427	3	GW	P	NWNE	D	3	MVRD	P	ML 47062	N2995

BONANZA 1023-2M1S	02	100S	230E	4304750379	17443	3	GW	P	SENW	D	3	MVRD	P	ML 47062	N2995
BONANZA 1023-2L2S	02	100S	230E	4304750380	17444	3	GW	P	SENW	D	3	MVRD	P	ML 47062	N2995
BONANZA 1023-2K4S	02	100S	230E	4304750381	17446	3	GW	P	SENW	D	3	MVRD	P	ML 47062	N2995
BONANZA 1023-2K1S	02	100S	230E	4304750382	17445	3	GW	P	SENW	D	3	WSMVD	P	ML 47062	N2995
BONANZA 4-6 *	04	100S	230E	4304734751	13841	1	GW	P	NESW		1	MNCS	P	UTU-33433	N2995
BONANZA 1023-4A	04	100S	230E	4304735360	14261	1	GW	P	NENE		1	WSMVD	P	U-33433	N2995
BONANZA 1023-4E	04	100S	230E	4304735392	14155	1	GW	P	SWNW		1	WSMVD	P	U-33433	N2995
BONANZA 1023-4C	04	100S	230E	4304735437	14252	1	GW	P	NENW		1	WSMVD	P	U-33433	N2995
BONANZA 1023-4M	04	100S	230E	4304735629	14930	1	GW	P	SWSW		1	WSMVD	P	U-33433	N2995
BONANZA 1023-4O	04	100S	230E	4304735688	15111	1	GW	P	SWSE		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-4I	04	100S	230E	4304735689	14446	1	GW	P	NESE		1	MVRD	P	UTU-33433	N2995
BONANZA 1023-4G	04	100S	230E	4304735746	14445	1	GW	P	SWNE		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-4D	04	100S	230E	4304737315	16352	1	GW	P	NWNW		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-4H	04	100S	230E	4304737317	16318	1	GW	P	SENE		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-4B	04	100S	230E	4304737328	16351	1	GW	P	NWNE		1	MVRD	P	UTU-33433	N2995
BONANZA 1023-4L	04	100S	230E	4304738211	16393	1	GW	P	NWSW		1	MVRD	P	UTU-33433	N2995
BONANZA 1023-4P	04	100S	230E	4304738212	16442	1	GW	P	SESE		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-4N	04	100S	230E	4304738303	16395	1	GW	P	SESW		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-4FX (RIGSKID)	04	100S	230E	4304739918	16356	1	GW	P	SENW		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-5O	05	100S	230E	4304735438	14297	1	GW	P	SWSE		1	WSMVD	P	U-33433	N2995
BONANZA 1023-5AX (RIGSKID)	05	100S	230E	4304735809	14243	1	GW	P	NENE		1	WSMVD	P	U-33433	N2995
BONANZA 1023-5C	05	100S	230E	4304736176	14729	1	GW	P	NENW		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-5G	05	100S	230E	4304736177	14700	1	GW	P	SWNE		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-5M	05	100S	230E	4304736178	14699	1	GW	P	SWSW		1	WSMVD	P	UTU-73450	N2995
BONANZA 1023-5K	05	100S	230E	4304736741	15922	1	GW	P	NESW		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-5B	05	100S	230E	4304737318	16904	1	GW	P	NWNE		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-5E	05	100S	230E	4304737319	16824	1	GW	P	SWNW		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-5H	05	100S	230E	4304737320	16793	1	GW	P	SENE		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-5N	05	100S	230E	4304737321	16732	1	GW	P	SESW		1	WSMVD	P	UTU-73450	N2995
BONANZA 1023-5L	05	100S	230E	4304737322	16825	1	GW	P	NWSW		1	MVRD	P	UTU-33433	N2995
BONANZA 1023-5J	05	100S	230E	4304737428	17055	1	GW	P	NWSE		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-5P	05	100S	230E	4304738213	16795	1	GW	P	SESE		1	MVRD	P	UTU-33433	N2995
BONANZA 1023-5N-1	05	100S	230E	4304738911	17060	1	GW	P	SESW		1	WSMVD	P	UTU-73450	N2995
BONANZA 1023-5PS	05	100S	230E	4304750169	17323	1	GW	P	NESE	D	1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-5G2AS	05	100S	230E	4304750486	17459	1	GW	P	SWNE	D	1	MVRD	P	UTU 33433	N2995
BONANZA 1023-5G2CS	05	100S	230E	4304750487	17462	1	GW	P	SWNE	D	1	MVRD	P	UTU 33433	N2995
BONANZA 1023-5G3BS	05	100S	230E	4304750488	17461	1	GW	P	SWNE	D	1	MVRD	P	UTU 33433	N2995
BONANZA 1023-5G3CS	05	100S	230E	4304750489	17460	1	GW	P	SWNE	D	1	MVRD	P	UTU 33433	N2995
BONANZA 1023-5N4AS	05	100S	230E	4304752080	18484	1	GW	DRL	SWSW	D	1	WSMVD	DRL	UTU73450	N2995
BONANZA 1023-8C2DS	05	100S	230E	4304752081	18507	1	GW	DRL	SWSW	D	1	WSMVD	DRL	UTU37355	N2995
BONANZA 6-2	06	100S	230E	4304734843	13796	1	GW	TA	NESW		1	WSMVD	TA	UTU-38419	N2995
BONANZA 1023-6C	06	100S	230E	4304735153	13951	1	GW	P	NENW		1	MVRD	P	U-38419	N2995
BONANZA 1023-6E	06	100S	230E	4304735358	14170	1	GW	P	SWNW		1	MVRD	P	U-38419	N2995
BONANZA 1023-6M	06	100S	230E	4304735359	14233	1	GW	P	SWSW		1	WSMVD	P	U-38419	N2995
BONANZA 1023-6G	06	100S	230E	4304735439	14221	1	GW	P	SWNE		1	WSMVD	P	UTU-38419	N2995
BONANZA 1023-6O	06	100S	230E	4304735630	14425	1	GW	TA	SWSE		1	WSMVD	TA	U-38419	N2995

\* not moved in unit

BONANZA 1023-6A	06	100S	230E	4304736067	14775			1	GW	P	NENE		1	WSMVD	P	U-33433	N2995
BONANZA 1023-6N	06	100S	230E	4304737211	15672			1	GW	P	SESW		1	WSMVD	P	UTU-38419	N2995
BONANZA 1023-6L	06	100S	230E	4304737212	15673			1	GW	P	NWSW		1	WSMVD	P	UTU-38419	N2995
BONANZA 1023-6J	06	100S	230E	4304737213	15620			1	GW	P	NWSE		1	WSMVD	P	UTU-38419	N2995
BONANZA 1023-6F	06	100S	230E	4304737214	15576			1	GW	TA	SENW		1	WSMVD	TA	UTU-38419	N2995
BONANZA 1023-6P	06	100S	230E	4304737323	16794			1	GW	P	SESE		1	WSMVD	P	UTU-38419	N2995
BONANZA 1023-6H	06	100S	230E	4304737324	16798			1	GW	S	SENE		1	WSMVD	S	UTU-33433	N2995
BONANZA 1023-6D	06	100S	230E	4304737429	17020			1	GW	P	NWNW		1	WSMVD	P	UTU-38419	N2995
BONANZA 1023-6B	06	100S	230E	4304740398	18291			1	GW	P	NWNE		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-6M1BS	06	100S	230E	4304750452	17578			1	GW	P	NWSW	D	1	WSMVD	P	UTU 38419	N2995
BONANZA 1023-6N1AS	06	100S	230E	4304750453	17581			1	GW	P	NWSW	D	1	WSMVD	P	UTU 38419	N2995
BONANZA 1023-6N1CS	06	100S	230E	4304750454	17580			1	GW	P	NWSW	D	1	WSMVD	P	UTU 38419	N2995
BONANZA 1023-6N4BS	06	100S	230E	4304750455	17579			1	GW	P	NWSW	D	1	WSMVD	P	UTU 38419	N2995
BONANZA 1023-6I2S	06	100S	230E	4304750457	17790			1	GW	P	NESE	D	1	WSMVD	P	UTU 38419	N2995
BONANZA 1023-6I4S	06	100S	230E	4304750458	17792			1	GW	P	NESE	D	1	WSMVD	P	UTU 38419	N2995
BONANZA 1023-6J3S	06	100S	230E	4304750459	17791			1	GW	P	NESE	D	1	WSMVD	P	UTU 38419	N2995
BONANZA 1023-6P1S	06	100S	230E	4304750460	17793			1	GW	P	NESE	D	1	WSMVD	P	UTU 38419	N2995
BONANZA 1023-6A2CS	06	100S	230E	4304751430	18292			1	GW	P	NWNE	D	1	WSMVD	P	UTU33433	N2995
BONANZA 1023-6B4BS	06	100S	230E	4304751431	18293			1	GW	P	NWNE	D	1	WSMVD	P	UTU33433	N2995
BONANZA 1023-6B4CS	06	100S	230E	4304751432	18294			1	GW	P	NWNE	D	1	WSMVD	P	UTU33433	N2995
BONANZA 1023-6C4BS	06	100S	230E	4304751449	18318			1	GW	P	NENW	D	1	WSMVD	P	UTU38419	N2995
BONANZA 1023-6D1DS	06	100S	230E	4304751451	18316			1	GW	P	NENW	D	1	WSMVD	P	UTU38419	N2995
FLAT MESA FEDERAL 2-7	07	100S	230E	4304730545	18244			1	GW	S	NENW		1	WSMVD	S	U-38420	N2995
BONANZA 1023-7B	07	100S	230E	4304735172	13943			1	GW	P	NWNE		1	MVRD	P	U-38420	N2995
BONANZA 1023-7L	07	100S	230E	4304735289	14054			1	GW	P	NWSW		1	WSMVD	P	U-38420	N2995
BONANZA 1023-7D	07	100S	230E	4304735393	14171			1	GW	P	NWNW		1	WSMVD	P	U-38420	N2995
BONANZA 1023-7P	07	100S	230E	4304735510	14296			1	GW	P	SESE		1	WSMVD	P	U-38420	N2995
BONANZA 1023-7H	07	100S	230E	4304736742	15921			1	GW	P	SENE		1	WSMVD	P	UTU-38420	N2995
BONANZA 1023-7NX (RIGSKID)	07	100S	230E	4304736932	15923			1	GW	P	SESW		1	WSMVD	P	UTU-38420	N2995
BONANZA 1023-7M	07	100S	230E	4304737215	16715			1	GW	P	SWSW		1	WSMVD	P	UTU-38420	N2995
BONANZA 1023-7K	07	100S	230E	4304737216	16714			1	GW	P	NESW		1	WSMVD	P	UTU-38420	N2995
BONANZA 1023-7E	07	100S	230E	4304737217	16870			1	GW	P	SWNW		1	WSMVD	P	UTU-38420	N2995
BONANZA 1023-7G	07	100S	230E	4304737326	16765			1	GW	P	SWNE		1	WSMVD	P	UTU-38420	N2995
BONANZA 1023-7A	07	100S	230E	4304737327	16796			1	GW	P	NENE		1	WSMVD	P	UTU-38420	N2995
BONANZA 1023-7O	07	100S	230E	4304738304	16713			1	GW	P	SWSE		1	MVRD	P	UTU-38420	N2995
BONANZA 1023-7B-3	07	100S	230E	4304738912	17016			1	GW	P	NWNE		1	WSMVD	P	UTU-38420	N2995
BONANZA 1023-07JT	07	100S	230E	4304739390	16869			1	GW	P	NWSE		1	WSMVD	P	UTU-38420	N2995
BONANZA 1023-7J2AS	07	100S	230E	4304750474	17494			1	GW	P	NWSE	D	1	WSMVD	P	UTU 38420	N2995
BONANZA 1023-7J2DS	07	100S	230E	4304750475	17495			1	GW	P	NWSE	D	1	WSMVD	P	UTU 38420	N2995
BONANZA 1023-7L3DS	07	100S	230E	4304750476	17939			1	GW	P	NWSW	D	1	WSMVD	P	UTU 38420	N2995
BONANZA 1023-7M2AS	07	100S	230E	4304750477	17942			1	GW	P	NWSW	D	1	WSMVD	P	UTU 38420	N2995
BONANZA 1023-7N2AS	07	100S	230E	4304750478	17940			1	GW	P	NWSW	D	1	WSMVD	P	UTU 38420	N2995
BONANZA 1023-7N2DS	07	100S	230E	4304750479	17941			1	GW	P	NWSW	D	1	WSMVD	P	UTU 38420	N2995
BONANZA 1023-7O4S	07	100S	230E	4304750480	17918			1	GW	P	SESE	D	1	WSMVD	P	UTU 38420	N2995
BONANZA 1023-7P2S	07	100S	230E	4304750482	17919			1	GW	P	SESE	D	1	WSMVD	P	UTU 38420	N2995
BONANZA 8-2	08	100S	230E	4304734087	13851			1	GW	P	SESE		1	MVRD	P	U-37355	N2995

BONANZA 8-3	08	100S	230E	4304734770	13843			1	GW	P	NWNW			1	MVRD	P	U-37355	N2995
BONANZA 1023-8A	08	100S	230E	4304735718	14932			1	GW	P	NENE			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8L	08	100S	230E	4304735719	14876			1	GW	P	NWSW			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8N	08	100S	230E	4304735720	15104			1	GW	P	SESW			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8F	08	100S	230E	4304735989	14877			1	GW	S	SESW			1	WSMVD	S	UTU-37355	N2995
BONANZA 1023-8I	08	100S	230E	4304738215	16358			1	GW	P	NESE			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8K	08	100S	230E	4304738216	16354			1	GW	P	NESW			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8M	08	100S	230E	4304738217	16564			1	GW	P	SWSW			1	MVRD	P	UTU-37355	N2995
BONANZA 1023-8G	08	100S	230E	4304738218	16903			1	GW	P	SWNE			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8E	08	100S	230E	4304738219	16397			1	GW	P	SWNW			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8C	08	100S	230E	4304738220	16355			1	GW	P	NENW			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8B	08	100S	230E	4304738221	16292			1	GW	P	NWNE			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8H	08	100S	230E	4304738222	16353			1	GW	P	SENE			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8O	08	100S	230E	4304738305	16392			1	GW	P	SWSE			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8B-4	08	100S	230E	4304738914	17019			1	GW	P	NWNE			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8A1DS	08	100S	230E	4304750481	17518			1	GW	P	NENE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8A4BS	08	100S	230E	4304750483	17519			1	GW	P	NENE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8B1AS	08	100S	230E	4304750484	17520			1	GW	P	NENE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8B2AS	08	100S	230E	4304750485	17521			1	GW	P	NENE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8O2S	08	100S	230E	4304750495	17511			1	GW	P	NWSE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8J1S	08	100S	230E	4304750496	17509			1	GW	P	NWSE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8O3S	08	100S	230E	4304750497	17512			1	GW	P	NWSE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8J3	08	100S	230E	4304750498	17510			1	GW	P	NWSE			1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8C4CS	08	100S	230E	4304750499	17544			1	GW	P	NENW	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8D2DS	08	100S	230E	4304750500	17546			1	GW	P	NENW	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8D3DS	08	100S	230E	4304750501	17545			1	GW	P	NENW	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8F3DS	08	100S	230E	4304750502	17543			1	GW	P	NENW	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8A4CS	08	100S	230E	4304751131	18169			1	GW	P	NWNE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8B3BS	08	100S	230E	4304751132	18167			1	GW	P	NWNE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8C1AS	08	100S	230E	4304751133	18166			1	GW	P	NWNE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8G3AS	08	100S	230E	4304751134	18168			1	GW	P	NWNE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8E2AS	08	100S	230E	4304751135	18227			1	GW	P	SESW	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8F3BS	08	100S	230E	4304751136	18227			1	GW	P	SESW	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8F4AS	08	100S	230E	4304751137	18224			1	GW	P	SESW	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8F4DS	08	100S	230E	4304751138	18225			1	GW	P	SESW	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8J2CS	08	100S	230E	4304751139	18226			1	GW	P	SESW	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8G4DS	08	100S	230E	4304751140	18144			1	GW	P	NESE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8H2DS	08	100S	230E	4304751141	18142			1	GW	P	NESE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8H3DS	08	100S	230E	4304751142	18143			1	GW	P	NESE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8H4DS	08	100S	230E	4304751143	18141			1	GW	P	NESE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8I4BS	08	100S	230E	4304751144	18155			1	GW	P	NESE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8J4BS	08	100S	230E	4304751145	18154			1	GW	P	NESE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8P1AS	08	100S	230E	4304751146	18156			1	GW	P	NESE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8P2BS	08	100S	230E	4304751147	18153			1	GW	P	NESE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8P4AS	08	100S	230E	4304751148	18157			1	GW	P	NESE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8E2DS	08	100S	230E	4304751149	18201			1	GW	P	NWSW	D		1	WSMVD	P	UTU 37355	N2995

BONANZA 1023-8E3DS	08	100S	230E	4304751150	18200			1	GW	P	NWSW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8K1CS	08	100S	230E	4304751151	18199			1	GW	P	NWSW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8K4CS	08	100S	230E	4304751152	18198			1	GW	P	NWSW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8L3DS	08	100S	230E	4304751153	18197			1	GW	P	NWSW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8M2AS	08	100S	230E	4304751154	18217			1	GW	P	SWSW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8M2DS	08	100S	230E	4304751155	18216			1	GW	P	SWSW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8N2BS	08	100S	230E	4304751156	18218			1	GW	P	SWSW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8O3CS	08	100S	230E	4304751157	18254			1	GW	P	SWSE	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8N3DS	08	100S	230E	4304751158	18215			1	GW	P	SWSW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8O4AS	08	100S	230E	4304751159	18252			1	GW	P	SWSE	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8P2CS	08	100S	230E	4304751160	18251			1	GW	P	SWSE	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8P3CS	08	100S	230E	4304751161	18253			1	GW	P	SWSE	D	1	WSMVD	P	UTU 37355	N2995
CANYON FEDERAL 2-9	09	100S	230E	4304731504	1468			1	GW	P	NENW		1	MVRD	P	U-37355	N2995
SOUTHMAN CANYON 9-3-M	09	100S	230E	4304732540	11767			1	GW	S	SWSW		1	MVRD	S	UTU-37355	N2995
SOUTHMAN CANYON 9-4-J	09	100S	230E	4304732541	11685			1	GW	S	NWSE		1	MVRD	S	UTU-37355	N2995
BONANZA 9-6	09	100S	230E	4304734771	13852			1	GW	P	NWNE		1	MVRD	P	U-37355	N2995
BONANZA 9-5	09	100S	230E	4304734866	13892			1	GW	P	SESW		1	MVRD	P	U-37355	N2995
BONANZA 1023-9E	09	100S	230E	4304735620	14931			1	GW	P	SWNW		1	WSMVD	P	U-37355	N2995
BONANZA 1023-9I	09	100S	230E	4304738223	16766			1	GW	P	NESE		1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-9D	09	100S	230E	4304738306	16398			1	GW	P	NWNW		1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-9J	09	100S	230E	4304738811	16989			1	GW	P	NWSE		1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-9B3BS	09	100S	230E	4304750503	17965			1	GW	P	SENE	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-9B3CS	09	100S	230E	4304750504	17968			1	GW	P	SENE	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-9H2BS	09	100S	230E	4304750505	17966			1	GW	P	SENE	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-9H2CS	09	100S	230E	4304750506	17967			1	GW	P	SENE	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 10-2	10	100S	230E	4304734704	13782			1	GW	P	NWNW		1	MVRD	P	U-72028	N2995
BONANZA 1023-10L	10	100S	230E	4304735660	15164			1	GW	P	NWSW		1	WSMVD	P	U-38261	N2995
BONANZA 1023-10E	10	100S	230E	4304738224	16501			1	GW	P	SWNW		1	MVRD	P	UTU-72028	N2995
BONANZA 1023-10C	10	100S	230E	4304738228	16500			1	GW	P	NENW		1	MVRD	P	UTU-72028	N2995
BONANZA 1023-10C-4	10	100S	230E	4304738915	17015			1	GW	P	NENW		1	MVRD	P	UTU-72028	N2995
BONANZA 11-2 ★	11	100S	230E	4304734773	13768			1	GW	P	SWNW		1	MVMCS	P	UTU-38425	N2995
BONANZA 1023-11K	11	100S	230E	4304735631	15132			1	GW	P	NESW		1	WSMVD	P	UTU-38425	N2995
BONANZA 1023-11B	11	100S	230E	4304738230	16764			1	GW	P	NWNE		1	MVRD	P	UTU-38425	N2995
BONANZA 1023-11F	11	100S	230E	4304738232	16797			1	GW	P	SENW		1	MVRD	P	UTU-38425	N2995
BONANZA 1023-11D	11	100S	230E	4304738233	16711			1	GW	P	NWNW		1	MVRD	P	UTU-38425	N2995
BONANZA 1023-11G	11	100S	230E	4304738235	16826			1	GW	P	SWNE		1	MVRD	P	UTU-38425	N2995
BONANZA 1023-11C	11	100S	230E	4304738309	16736			1	GW	P	NENW		1	MVRD	P	UTU-38425	N2995
BONANZA 1023-11J	11	100S	230E	4304738310	16839			1	GW	P	NWSE		1	WSMVD	P	UTU-38424	N2995
BONANZA 1023-11N	11	100S	230E	4304738311	16646			1	GW	P	SESW		1	MVRD	P	UTU-38424	N2995
BONANZA 1023-11M	11	100S	230E	4304738312	16687			1	GW	P	SWSW		1	MVRD	P	UTU-38424	N2995
BONANZA 1023-11L	11	100S	230E	4304738812	16987			1	GW	P	NWSW		1	WSMVD	P	UTU-38424	N2995
NSO FEDERAL 1-12	12	100S	230E	4304730560	1480			1	GW	P	NENW		1	MVRD	P	UTU-38423	N2995
WHITE RIVER 1-14	14	100S	230E	4304730481	1500			1	GW	S	NENW		1	MVRD	S	U-38427	N2995
BONANZA 1023-14D	14	100S	230E	4304737030	16799			1	GW	P	NWNW		1	MVRD	P	UTU-38427	N2995
BONANZA 1023-14C	14	100S	230E	4304738299	16623			1	GW	P	NENW		1	MVRD	P	UTU-38427	N2995
BONANZA FEDERAL 3-15	15	100S	230E	4304731278	8406			1	GW	P	NENW		1	MVRD	P	U-38428	N2995

★ not moved into unit

BONANZA 1023-15H	15	100S	230E	4304738316	16688		1	GW	P	SENE		1	MVRD	P	UTU-38427	N2995
BONANZA 1023-15J	15	100S	230E	4304738817	16988		1	GW	P	NWSE		1	MVRD	P	UTU-38427	N2995
BONANZA 1023-15H4CS	15	100S	230E	4304750741	17492		1	GW	P	NESE	D	1	MVRD	P	UTU 38427	N2995
BONANZA 1023-15I2AS	15	100S	230E	4304750742	17493		1	GW	P	NESE	D	1	WSMVD	P	UTU 38427	N2995
BONANZA 1023-15I4BS	15	100S	230E	4304750743	17490		1	GW	P	NESE	D	1	WSMVD	P	UTU 38427	N2995
BONANZA 1023-15P1BS	15	100S	230E	4304750744	17491		1	GW	P	NESE	D	1	WSMVD	P	UTU 38427	N2995
LOOKOUT POINT STATE 1-16	16	100S	230E	4304730544	1495		3	GW	P	NESE		3	WSMVD	P	ML-22186-A	N2995
BONANZA 1023-16J	16	100S	230E	4304737092	15987		3	GW	OPS	NWSE		3	WSMVD	OPS	ML-22186-A	N2995
BONANZA 1023-17B	17	100S	230E	4304735747	15165		1	GW	P	NWNE		1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-17C	17	100S	230E	4304738237	16585		1	GW	P	NENW		1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-17D3S	17	100S	230E	4304750511	17943		1	GW	P	NENW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-17E2S	17	100S	230E	4304750512	17944		1	GW	P	NENW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-17E3AS	17	100S	230E	4304750513	17945		1	GW	P	NENW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-17E3CS	17	100S	230E	4304750514	17946		1	GW	P	NENW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-18G	18	100S	230E	4304735621	14410		1	GW	P	SWNE		1	WSMVD	P	U-38241	N2995
BONANZA 1023-18B	18	100S	230E	4304735721	14395		1	GW	P	NWNE		1	WSMVD	P	U-38421	N2995
BONANZA 1023-18DX (RIGSKID)	18	100S	230E	4304736218	14668		1	GW	P	NWNW		1	WSMVD	P	U-38241	N2995
BONANZA 1023-18A	18	100S	230E	4304738243	16625		1	GW	P	NENE		1	WSMVD	P	UTU-38421	N2995
BONANZA 1023-18F	18	100S	230E	4304738244	16624		1	GW	P	SENW		1	WSMVD	P	UTU-38421	N2995
BONANZA 1023-18E	18	100S	230E	4304738245	16645		1	GW	P	SWNW		1	MVRD	P	UTU-38421	N2995
BONANZA 1023-18C	18	100S	230E	4304738246	16734		1	GW	P	NENW		1	MVRD	P	UTU-38421	N2995
BONANZA 1023-18G-1	18	100S	230E	4304738916	17135		1	GW	P	SWNE		1	WSMVD	P	UTU-38421	N2995
BONANZA 1023-18D3AS	18	100S	230E	4304750448	17498		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18D3DS	18	100S	230E	4304750449	17499		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18E2DS	18	100S	230E	4304750450	17497		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18E3AS	18	100S	230E	4304750451	17496		1	GW	P	SENW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18L2S	18	100S	230E	4304750520	18111		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18L3S	18	100S	230E	4304750521	18110		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18K3AS	18	100S	230E	4304751061	18112		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18K3BS	18	100S	230E	4304751063	18113		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18M2AS	18	100S	230E	4304751064	18117		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18M2DS	18	100S	230E	4304751065	18116		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18N2AS	18	100S	230E	4304751066	18114		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18N2DS	18	100S	230E	4304751067	18115		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-10F	10	100S	230E	4304738225	16565			GW	P	SENW			MVRD	P	UTU 72028	N2995
BONANZA 1023-6D1AS	6	100S	230E	4304751450	18320			GW	P	NENW	D		WSMVD	P	UTU 38419	N2995
BONANZA 1023-6C1CS	6	100S	230E	4304751448	18319			GW	P	NENW	D				UTU 38419	N2995
BONANZA 1023-6D3AS	6	100S	230E	4304751452	18317			GW	P	NENW	D		WSMVD	P	UTU 38419	N2995

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9  5. LEASE DESIGNATION AND SERIAL NUMBER: U-33433
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:  7. UNIT or CA AGREEMENT NAME: PONDEROSA
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: SOUTHMAN CYN 31-2X (RIG SKID)
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.	9. API NUMBER: 43047348980000
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	PHONE NUMBER: 720 929-6514  9. FIELD and POOL or WILDCAT: WEST VAL BUTTES
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0733 FNL 0836 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWNW Section: 31 Township: 09.0S Range: 23.0E Meridian: S	COUNTY: UINTAH  STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 7/16/2012  <input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:  <input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:  <input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> ACIDIZE  <input type="checkbox"/> CHANGE TO PREVIOUS PLANS  <input type="checkbox"/> CHANGE WELL STATUS  <input type="checkbox"/> DEEPEN  <input type="checkbox"/> OPERATOR CHANGE  <input type="checkbox"/> PRODUCTION START OR RESUME  <input type="checkbox"/> REPERFORATE CURRENT FORMATION  <input type="checkbox"/> TUBING REPAIR  <input type="checkbox"/> WATER SHUTOFF  <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING  <input type="checkbox"/> CHANGE TUBING  <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS  <input type="checkbox"/> FRACTURE TREAT  <input type="checkbox"/> PLUG AND ABANDON  <input type="checkbox"/> RECLAMATION OF WELL SITE  <input type="checkbox"/> SIDETRACK TO REPAIR WELL  <input type="checkbox"/> VENT OR FLARE  <input type="checkbox"/> SI TA STATUS EXTENSION  <input checked="" type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR  <input type="checkbox"/> CHANGE WELL NAME  <input type="checkbox"/> CONVERT WELL TYPE  <input type="checkbox"/> NEW CONSTRUCTION  <input type="checkbox"/> PLUG BACK  <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION  <input type="checkbox"/> TEMPORARY ABANDON  <input type="checkbox"/> WATER DISPOSAL  <input type="checkbox"/> APD EXTENSION  OTHER: <input type="text" value="Cement Remediation"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The operator requests approval to conduct a cement remediation job on the well. Please see the attached procedure. Thank you.

**Accepted by the  
Utah Division of  
Oil, Gas and Mining**

Date: July 23, 2012

By: David K. Quist

<b>NAME (PLEASE PRINT)</b> Jaime Scharnowske	<b>PHONE NUMBER</b> 720 929-6304	<b>TITLE</b> Regulatory Analyst
<b>SIGNATURE</b> N/A	<b>DATE</b> 7/16/2012	

**Name: Southman Canyon 923-31-2X****Location: Section 31, T9S R23E****Uintah County, UT****Date: 7/16/1 2****ELEVATIONS: 5119' GL 5134' KB****TOTAL DEPTH: 8505 PBTD: 8459 (FC)****SURFACE CASING: 9 5/8", 32.3#, M-40 ST&C @ 2010'****PRODUCTION CASING: 4 1/2", 11.6#, J-55 LT&C @ 8505'****Tubing: 4.7# J-55 w/ R Nipple****TUBULAR PROPERTIES:**

Tubular/Borehole	Drift inches	Collapse psi	Burst psi	Capacities		
				Gal./ft.	Cuft/ft.	Bbl./ft.
2.375" 4.7# N-80 tbg.	1.901	11780	11200	0.1624	0.0217	0.0039
4.5" 11.6# N-80	3.875	6350	7780	0.6528	0.0872	0.0155
9.625" 36# J-55	8.765	2020	3520	3.247	0.434	0.0773
Annular Capacities						
2.375" tbg. X 4 1/2" 11.6# csg				0.4227	0.0565	0.0101
4.5" csg X 9 5/8" 36# csg				2.4192	0.3231	0.0576
4.5" csg X 7.875 borehole				1.704	0.2276	0.0406
9 5/8" csg X 12 1/4" borehole				2.3436	0.3132	0.0558

**TOC: @ 2920'****Prognosis:**

While performing a workover on this well, a cement migration leak in the surface casing annulus was found. The surface casing went on a vacuum when 80 bbls of fresh water was injected at 3 BPM. A top cement job will be performed to isolate gas migration up the surface casing.

**Perfs:**

Legal Well Name	Date	MD Top (usft)	MD Base (usft)
SOUTHMAN CANYON 31-2X	5/1/2003	6,534.00	6,540.00
SOUTHMAN CANYON 31-2X	5/1/2003	6,740.00	6,750.00
SOUTHMAN CANYON 31-2X	5/1/2003	6,860.00	6,862.00
SOUTHMAN CANYON 31-2X	5/1/2003	6,890.00	6,892.00
SOUTHMAN CANYON 31-2X	5/1/2003	6,940.00	6,942.00
SOUTHMAN CANYON 31-2X	5/1/2003	7,082.00	7,084.00
SOUTHMAN CANYON 31-2X	5/1/2003	7,338.00	7,340.00
SOUTHMAN CANYON 31-2X	5/1/2003	7,378.00	7,380.00
SOUTHMAN CANYON 31-2X	5/1/2003	7,412.00	7,414.00
SOUTHMAN CANYON 31-2X	5/1/2003	7,458.00	7,460.00
SOUTHMAN CANYON 31-2X	5/1/2003	7,482.00	7,484.00
SOUTHMAN CANYON 31-2X	5/1/2003	7,498.00	7,500.00
SOUTHMAN CANYON 31-2X	5/1/2003	7,524.00	7,526.00
SOUTHMAN CANYON 31-2X	5/1/2003	7,550.00	7,552.00
SOUTHMAN CANYON 31-2X	5/1/2003	7,594.00	7,596.00
SOUTHMAN CANYON 31-2X	5/1/2003	7,780.00	7,784.00
SOUTHMAN CANYON 31-2X	5/1/2003	7,880.00	7,886.00
SOUTHMAN CANYON 31-2X	5/1/2003	8,107.00	8,109.00
SOUTHMAN CANYON 31-2X	5/1/2003	8,158.00	8,160.00
SOUTHMAN CANYON 31-2X	5/1/2003	8,204.00	8,206.00
SOUTHMAN CANYON 31-2X	5/1/2003	8,236.00	8,238.00
SOUTHMAN CANYON 31-2X	5/1/2003	8,284.00	8,286.00
SOUTHMAN CANYON 31-2X	5/1/2003	8,322.00	8,324.00
SOUTHMAN CANYON 31-2X	5/1/2003	8,351.00	8,353.00

$4.5'' \text{ 11.6\#} \times 9 \text{ 5/8''} \text{ 36\# csg annulus} = 0.3231 * 2010' = 635 \text{ cu ft}$

$4.5'' \text{ csg} \times 7.875'' \text{ borehole} = 0.3132 * 910' = 285 \text{ cu ft}$

Class G neat – 1.145 cuft/sxs yeild = 800 sxs

**Procedure:**

1. Trickle down production casing to ensure well is killed.
2. Hook up to surface casing and pump recommended cement job from vendor with minimal pressure in production string x surface csg annulus (800 sxs). Be sure not to exceed 400 psi.
3. WOC.
4. Observe surface pressure to ensure minimal pressure buildup in csg. Repeat if necessary.