

Dominion Exploration & Production, Inc.
P.O. 1360
Roosevelt, UT 84066

August 7, 2003

Utah Division of Oil, Gas, & Mining
1594 West North Temple, Suite 1210
P.O. Box 145801
Salt Lake City, UT 84114-5801


RE: APPLICATION FOR PERMIT TO DRILL
HILL CREEK UNIT 11-27F
NE/SW, SEC. 27, T10S, R20E
UINTAH COUNTY, UTAH
LEASE NO.: U-29784
UTE INDIAN TRIBAL LANDS

Enclosed please find a copy of the Application for Permit to Drill and associated attachments for the above-referenced well.

All further communication regarding the permit for this well, including the 7-day letter, communication regarding approval, and the approved APD should be directed to:

Ed Trotter, Agent
P.O. Box 1910
Vernal, UT 84078
Phone: (435)789-4120
Fax: (435)789-1420

Sincerely,



Ed Trotter
Agent

Dominion Exploration & Production, Inc.

Attachments

RECEIVED

AUG 11 2003

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

001

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. U-29784	
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE		6. If Indian, Allottee or Tribe Name Ute Indian Tribe	
2. Name of Operator Dominion Exploration & Production, Inc.		7. If Unit or CA Agreement, Name and No. Hill Creek Unit	
3a. Address 14000 Quail Spgs Parkway, Okla.City, OK 73134		8. Lease Name and Well No. HCU 11-27F	
3b. Phone No. (include area code) 405-749-1300		9. API Number 73-042-85130	
4. Location of Well (Report location clearly and in accordance with any state requirements.)* At surface 4419037Y 1599' FSL & 1899' FWL, NE/SW At proposed prod. zone 615141X 39.9155D -109.65282		10. Field and Pool, or Exploratory Natural Buttes	
14. Distance in miles and direction from nearest town or post office* 16.7 miles South of Ouray		11. Sec., T., R., M., or Bk and Survey or Area 27-10S-20E	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drg.unit line, if any) 1599'		12. County of Parish Uintah	
16. No. of Acres in lease 640		13 State UT	
17. Spacing Unit dedicated to this well 40		18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 1250'	
19. Proposed Depth 8,000		20. BLM/BIA Bond No. on file 76S 63050 0330	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5173'		22. Approximate date work will start* 01-Jun-04	
		23. Estimated duration 45 days	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|--|---|
| <ul style="list-style-type: none"> 1. Well plat certified by a registered surveyor. 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | <ul style="list-style-type: none"> 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 5. Operator certification. 6. Such other site specific information and/or plans as may be required by the authorized officer. |
|--|---|

25. Signature <i>Carla Christian</i>	Name (Printed/Typed) Carla Christian	Date August 7, 2003
Title Regulatory Specialist		
Approved by (Signature) <i>Bradley G. Hill</i>	Name (Printed/Typed) BRADLEY G. HILL	Date 08-18-03
Title Environmental Scientist III		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)


RECEIVED
AUG 11 2003
DIV. OF OIL, GAS & MINING

T10S, R20E, S.L.B.&M.

DOMINION EXPLR. & PROD., INC.


Well location, HCU #11-27F, located as shown in the NE 1/4 SW 1/4 of Section 27, T10S, R20E, S.L.B.&M. Uintah County Utah.

WEST - 79.83 (G.L.O.)

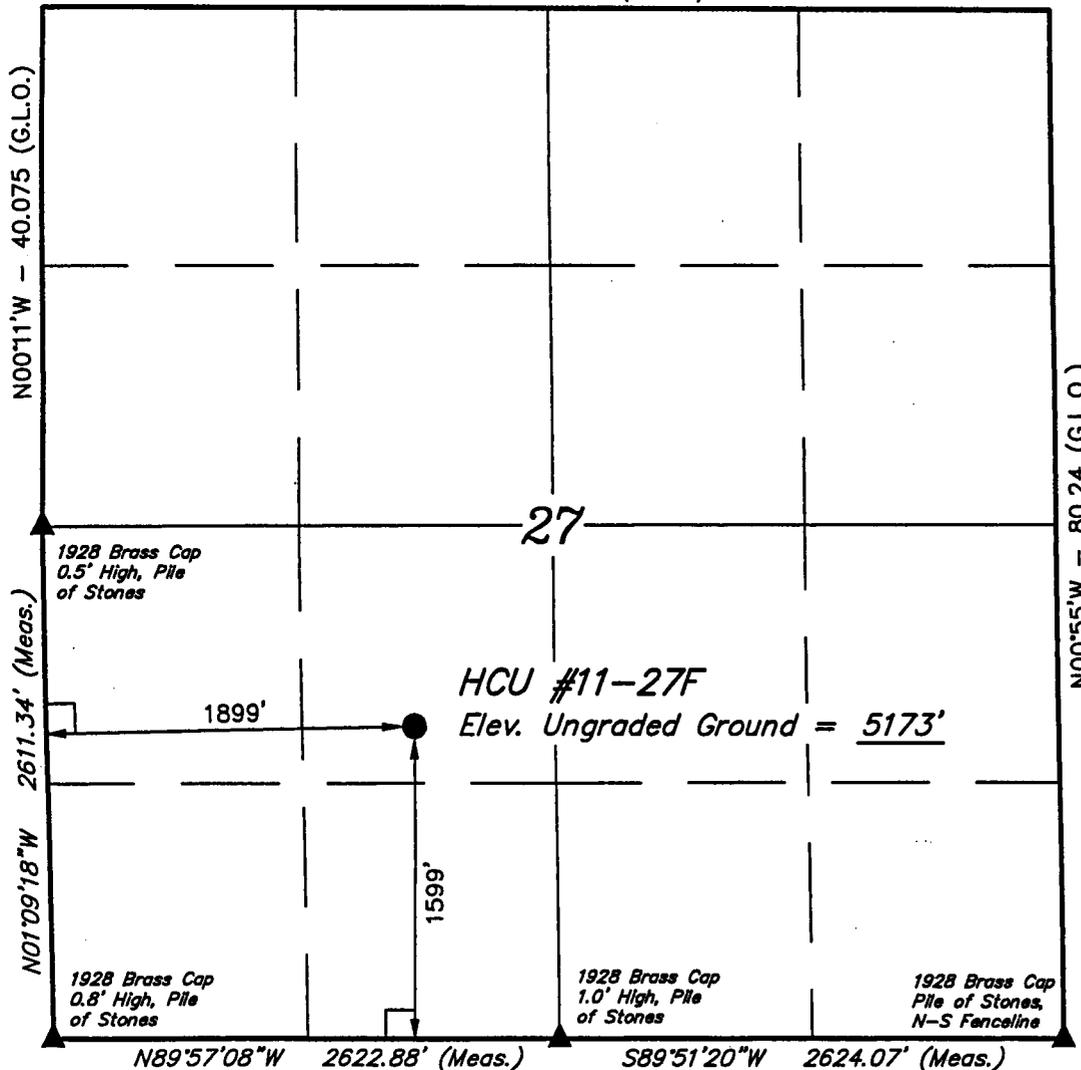

BASIS OF ELEVATION

SPOT ELEVATION AT THE SOUTHWEST CORNER OF SECTION 20, T10S, R20E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN. NW QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5251 FEET.

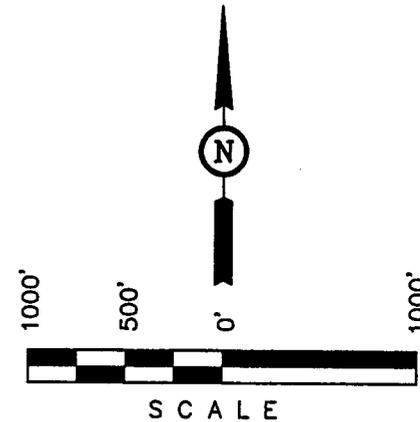

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Robert A. Kay
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 161314
 STATE OF UTAH

UINTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

(NAD 83)

LATITUDE = 39°54'55.92" (39.915533)

LONGITUDE = 109°39'13.07" (109.653631)

LEGEND:

└ = 90° SYMBOL

● = PROPOSED WELL HEAD.

▲ = SECTION CORNERS LOCATED.

SCALE 1" = 1000'	DATE SURVEYED: 04-29-03	DATE DRAWN: 05-01-03
PARTY K.K. M.B. D.R.B.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE DOMINION EXPLR. & PROD., INC	

DRILLING PLAN

APPROVAL OF OPERATIONS

Attachment for Permit to Drill

Name of Operator: Dominion Exploration & Production
Address: 14000 Quail Springs Parkway, Suite 600
Oklahoma City, OK 73134
Well Location: HCU 11-27F
1599' FSL & 1899' FWL
Section 27-10S-20E
Uintah County, UT

1. GEOLOGIC SURFACE FORMATION Uintah

2. ESTIMATED DEPTHS OF IMPORTANT GEOLOGIC MARKERS

<u>Formation</u>	<u>Depth</u>
Green River	925'
Wasatch Tongue	3,835'
Green River Tongue	4,165'
Wasatch	4,325'
Chapita Wells	5,225'
Uteland Buttes	6,425'
Mesaverde	7,525'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS

<u>Formation</u>	<u>Depth</u>	<u>Type</u>
Green River	925'	Oil
Wasatch Tongue	3,835'	Oil
Green River Tongue	4,165'	Oil
Wasatch	4,325'	Gas
Chapita Wells	5,225'	Gas
Uteland Buttes	6,425'	Gas
Mesaverde	7,525'	Gas

4. PROPOSED CASING PROGRAM

All casing used to drill this well will be new casing.

<u>Type</u>	<u>Size</u>	<u>Weight</u>	<u>Grade</u>	<u>Conn.</u>	<u>Top</u>	<u>Bottom</u>	<u>Hole</u>
Surface	13-3/8"	48.0 ppf	H-40	STC	0'	500'	17-1/2"
Intermediate	8-5/8"	32.0 ppf	J-55	LTC	0'	2,200'	12-1/4"
Production	5-1/2"	17.0 ppf	MAV-80	LTC	0'	8,000'	7-7/8"

5. OPERATOR'S MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL

Surface hole: No BOPE will be utilized.

Intermediate hole: To be drilled using a diverter stack with rotating head to divert flow from rig floor.

Production hole: Prior to drilling out the intermediate casing shoe, 3,000 psi or greater BOP equipment will be installed. The pipe rams will be operated at least once per day from intermediate casing to total depth. The blind rams will be tested once per day from intermediate casing to total depth if operations permit.

DRILLING PLAN

APPROVAL OF OPERATIONS

A diagram of the planned BOP equipment for normal drilling operations in this area is attached. As denoted there will be two valves and one check valve on the kill line, two valves on the choke line, and two adjustable chokes on the manifold system. The BOP "stack" will consist of two BOP rams (1 pipe, 1 blind) and one annular type preventer, all rated to a minimum of 3,000 psi working pressure.

The BOP equipment will be pressure tested prior to drilling below the intermediate casing shoe. All test pressures will be maintained for fifteen (15) minutes without any significant pressure decrease. Clear water will be circulated into the BOP stack and lines prior to pressure testing. The following test pressures will be used as a minimum for various equipment items.

1.	Annular BOP	1,500 psi
2.	Ram type BOP	3,000 psi
3.	Kill line valves	3,000 psi
4.	Choke line valves and choke manifold valves	3,000 psi
5.	Chokes	3,000 psi
6.	Casing, casinghead & weld	1,500 psi
7.	Upper kelly cock and safety valve	3,000 psi
8.	Dart valve	3,000 psi

6. MUD SYSTEMS

- An air or an air/mist system may be used to drill to drill the surface hole until water influx becomes too great.
- KCL mud system will be used to drill well.

<u>Depths</u>	<u>Mud Weight (ppg)</u>	<u>Mud System</u>
0' – 500'	8.4	Air foam mist, no pressure control
500' – 2,200'	8.6	Fresh water, rotating head and diverter
2,200' – 8,000'	8.6	Fresh water/2% KCL/KCL mud system

7. BLOOIE LINE

- An automatic igniter will not be installed on blooie line. The blooie will have a contact ignition source.
- A "target tee" connection will be installed on blooie line for 90° change of directions for abrasion resistance.
- "Target tee" connections will be a minimum of 50' from wellhead.
- The blooie line discharge will be a minimum of 100' from the wellhead.

8. AUXILIARY EQUIPMENT TO BE USED

- a. Kelly cock.
- b. Full opening valve with drill pipe connection will be kept on floor. Valve will be used when the kelly is not in string.

9. TESTING, LOGGING, AND CORING PROGRAMS TO BE FOLLOWED

- A drillstem test in the Wasatch Tongue is possible.
- One electric line wire-log will be run from total depth to intermediate casing.
- The gamma ray will be left on to record from total depth to intermediate casing.
- Other log curves (resistivities, porosity, and caliper) will record from total depth to intermediate casing.
- A dipmeter, percussion cores, or rotary cores may be run over selected intervals.

10. ANTICIPATED ABNORMAL PRESSURES OR TEMPERATURES EXPECTED

- Expected BHP 1,500–2,000 psi (lower than normal pressure gradient).
- No abnormal temperature or pressures are anticipated.
- The formations to be penetrated do not contain known H₂S gas.

11. WATER SUPPLY

- No water pipelines will be laid for this well.
- No water well will be drilled for this well.
- Drilling water for this will be hauled on the road(s) shown in Attachment No. 3.
- Water will be hauled from: Water Permit # 43-10447 Section 9, Township 8 South, Range 20 East

DRILLING PLAN

APPROVAL OF OPERATIONS

12. CEMENT SYSTEMS

a. Surface Cement:

Drill 17-1/2" hole to 500' and cement 13-3/8" to surface with 450 sks class "C" cement with 2% CaCl₂ and 1/4 #/sk. Poly-E-Flakes (volume includes 40% excess). Top out if necessary with Top Out cement listed below.

b. Intermediate Casing Cement:

- Drill 12-1/4" hole to 2,200'±, run and cement 8-5/8" to surface.
- Pump 20 bbls lightly weighted water spacer followed by 5 bbls fresh water. Displace with any available water.
- Casing to be run with: a) guide shoe b) insert float c) three (3) centralizers, one on each of first 3 joints d) stop ring for plug two joints off bottom e) bottom three joints thread locked f) pump job with bottom plug only.
- Cement to surface not required due to surface casing set deeper than normal.

<u>Type</u>	<u>Sacks</u>	<u>Interval</u>	<u>Density</u>	<u>Yield</u>	<u>Hole</u>	<u>Cement</u>	<u>Excess</u>
					<u>Volume</u>	<u>Volume</u>	
Lead	385	0'-1,700'	11.0 ppg	3.82 CFS	733 CF	1,466 CF	100%
Tail	370	1,700'-2,200'	15.6 ppg	1.20 CFS	220 CF	440 CF	100%

Lead Mix: Halliburton Prem Plus V blend. Blend includes Class "C" cement, gel, salt, gilsonite, EX-1 and HR-7.
Slurry yield: 3.82 cf/sack Slurry weight: 11.00 #/gal.
Water requirement: 22.95 gal/sack
Compressives @ 130°F: 157 psi after 24 hours

Tail Mix: Class "G" Cement, 1/4 lb/sk Cellophane Flakes + 2% bwoc Calcium Chloride + 44.3% fresh water.
Pump Time: 1 hr. 5 min. @ 90 °F.
Compressives @ 95 °F: 24 Hour is 4,700 psi

c. Production Casing Cement:

- Drill 7-7/8" hole to 8,000'±, run and cement 5 1/2".
- Cement interface is at 4,000', which is typically 500'-1,000' above shallowest pay.
- Pump 20 bbl Mud Clean II unweighted spacer, followed by 20 Bbls fresh H2O spacer.
- Displace with 3% KCL.

<u>Type</u>	<u>Sacks</u>	<u>Interval</u>	<u>Density</u>	<u>Yield</u>	<u>Hole</u>	<u>Cement</u>	<u>Excess</u>
					<u>Volume</u>	<u>Volume</u>	
Lead	160	3,700'-4,700'	11.5 ppg	3.12 CFS	175 CF	350 CF	100%
Tail	435	4,700'-8,000'	13.0 ppg	1.75 CFS	473 CF	946 CF	100%

Note: Caliper will be run to determine exact cement volume.


Lead Mix: Halliburton Prem Plus V blend. Blend includes Class "C" cement, gel, salt, gilsonite, EX-1 and HR-7.
Slurry yield: 3.12 cf/sack Slurry weight: 11.60 #/gal.
Water requirement: 17.71 gal/sack
Compressives @ 130°F: 157 psi after 24 hours

Tail Mix: Halliburton HLC blend (Prem Plus V/JB flyash). Blend includes Class "G" cement, KCl, EX-1, Halad 322, & HR-5.
Slurry yield: 1.75 cf/sack Slurry weight: 13.00 #/gal.
Water requirement: 9.09 gal/sack
Compressives @ 165°F: 905 psi after 24 hours


13. ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS

Starting Date: June 1, 2004
Duration: 14 Days

BOP STACK

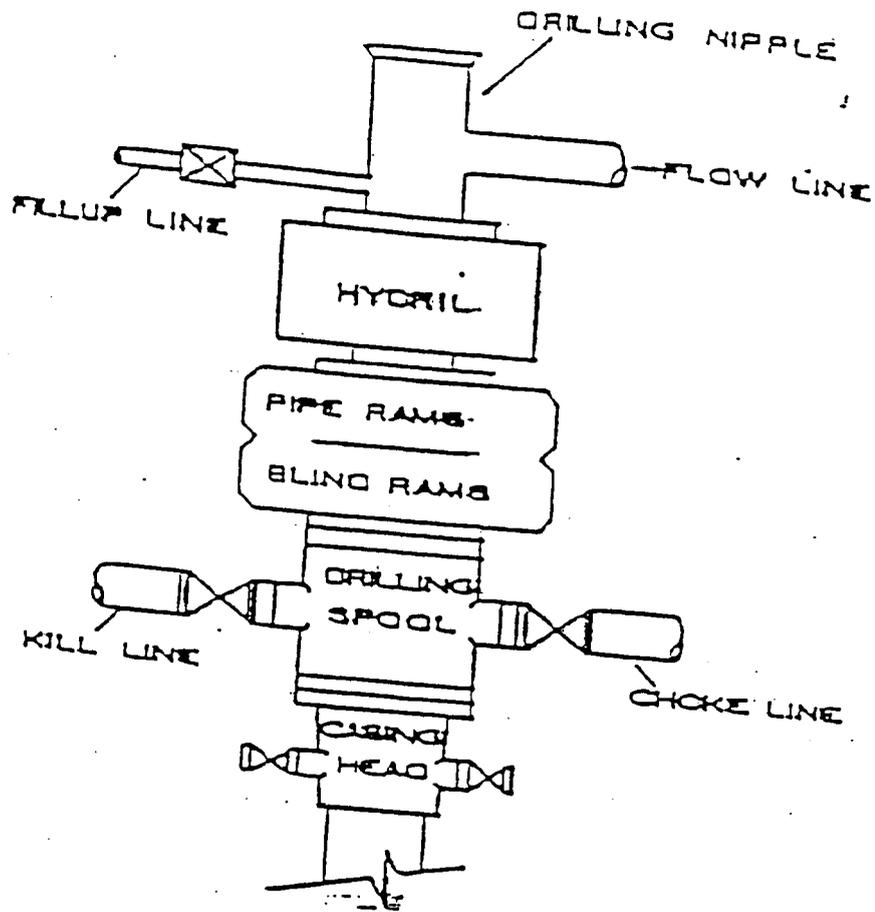





CHOKER MANIFOLD

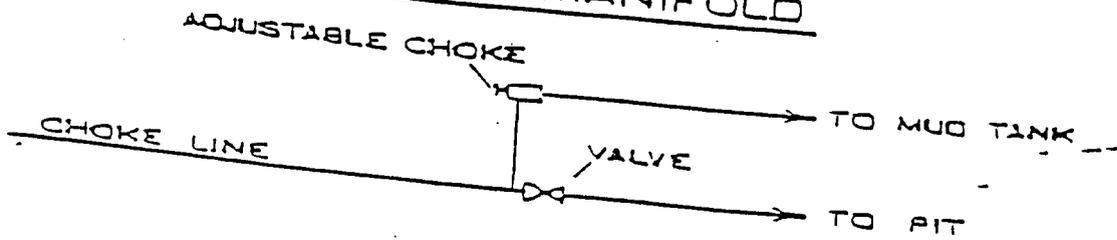

CONFIDENTIAL

LEGEND

- O = Oil Line
- G = Gas Line
- W = Water Line
- R = Relief Line (Pressure)
- C = Condensate Line
- V = Vent Line
- D = Drain Line
- M = Gas Meter
- P = Pump
- BP = Back Pressure Valve
- SWS = Sealed When Shipping
- SUS = Sealed Unless Shipping
- T = Heat Traced Line
- H = Heater
- BL = Buried Line
- ⋈ = Valve
- ↗ = Check Valve
- SC = Sealed Closed Valve
- NC = Normally Closed
- BD = Blowdown Line

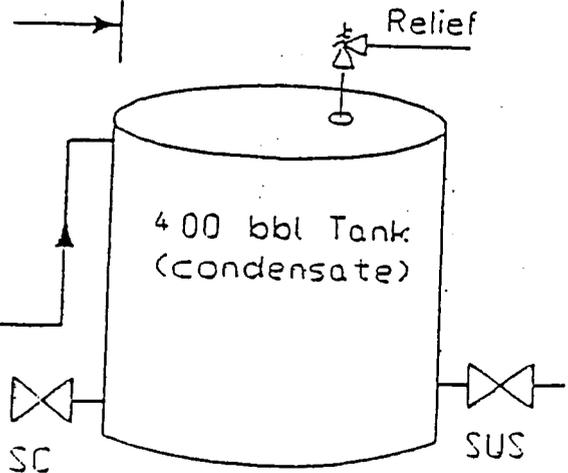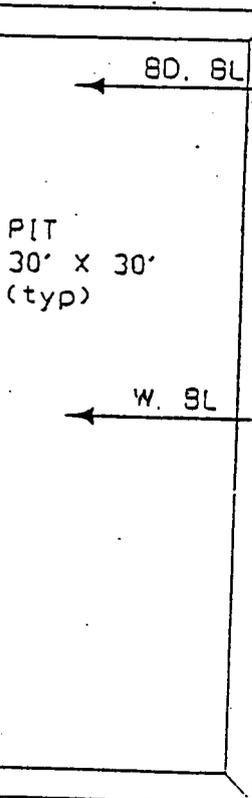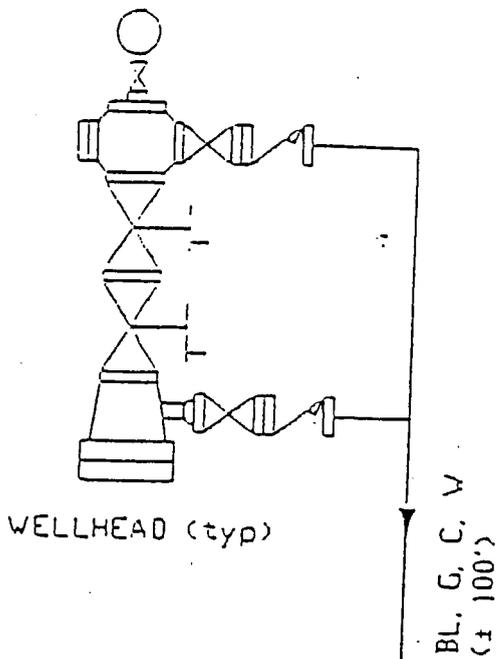

The site security plan is on file in NEPI's district office located at 1400 N. State St., Roosevelt, Utah. It can be inspected during office hours, from 6:30 AM thru 3:30 PM, Monday thru Friday..

DOMINION EXPLORATION & PRODUCTION, INC.

RIVER BEND FIELD, UINTA COUNTY

not to scale

**CONDITIONS OF APPROVAL
FOR THE SURFACE USE PROGRAM OF THE
APPLICATION FOR PERMIT TO DRILL**

Company/Operator: Dominion Exploration & Production, Inc.
Well Name & Number: Hill Creek Unit 11-27F
Lease Number: U-29784
Location: 1599' FSL & 1899' FWL, NE/SW, Sec.27,
T10S, R20E, S.L.B.&M., Uintah County
Surface Ownership: Ute Indian Tribe

NOTIFICATION REQUIREMENTS

Location Construction - forty-eight (48) hours prior to construction of location and access roads.

Location Completion - prior to moving on the drilling rig.

Spud Notice: - at least twenty-four (24) hours prior to spudding the well.

Casing String and Cementing - twenty-four (24) hours prior to running casing and cementing all casing strings.

BOP and related Equipment Tests - twenty-four (24) hours prior to running casing and tests.

First Production Notice - within five (5) business days after new Well begins or production resumes after Well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

SURFACE USE PROGRAM

1. EXISTING ROADS

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 16.7 miles south of Ouray, Utah - See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

2. PLANNED ACCESS ROAD

- A. The access road will be approximately 0.2 miles in length. See attached TOPO Map "B".
- B. The access road has a 30 foot ROW w/ 18 foot running surface.
- C. Maximum grade on access road will be 8%.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No culverts, bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

All travel will be confined to existing access road Right-of-Way. Access roads and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service Publication: Surface Operating Standards For Oil & Gas Exploration and Development, (1989).

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of-Way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by run off water shall be prevented by diverting water off at frequent

intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, Dominion Exploration & Production, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

3. **LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION**

A. Abandoned wells – 1*

B. Producing wells - 6*

(*See attached TOPO map “C” for location)

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

A. **ON WELL PAD**

1. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of wellhead valves, separator and dehy units with meter, 400 barrel vertical condensate tank, and attaching piping.
2. Gas gathering lines - A 4” gathering line will be buried from dehy to the edge of the location.
3. Surface pits – After the well is hydraulically fraced, it will be flowed back into the surface pits. After first production, a 400 barrel tank will be installed to contain produced waste water.

B. **OFF WELL PAD**

1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
2. A 4” OD steel above ground natural gas pipeline will be laid approximately 1300’ from proposed location to a point in the SW/SE of Section 27, T10S, R20E, where it will tie into Questar Pipeline Co.’s existing line. Proposed pipeline crosses Ute Indian Tribe lands within the Hill Creek Unit, thus a Right-of -Way grant will be required.
3. Proposed pipeline will be a 4” OD steel, welded line laid on the surface.
4. Protective measures and devices for livestock and wildlife will be taken and/or installed where required.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike

of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery.

The production facilities will be placed on the Northwest end of the location.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within 6 months of installation. Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

The required paint color is Desert Brown.

5. **LOCATION & TYPE OF WATER SUPPLY**

- A. Water source will be from Water Permit No. 43-10447 located in Sec. 9, T8S, R20E, Uintah County, Utah.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. **SOURCE OF CONSTRUCTION MATERIAL**

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of the location.
- B. All construction material will come from Tribal Land.
- C. No mineral materials will be required.

7. **METHODS OF HANDLING WASTE DISPOSAL**

A. **METHODS AND LOCATION**

- 1. Cuttings will be confined in the reserve pit.
- 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
- 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah County Landfill.
- 4. Produced wastewater will be confined to a lined or unlined pit or storage tank for a period not to exceed 90 days after initial production. After the 90-day period, the produced water will be contained in a tank on location and then disposed of at Ace Disposal, MCMC Disposal or Dominion's RBU 16-19F Disposal Well.

5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.
- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit or be removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

On Ute Indian Tribe administered land:

The reserve pit will be constructed so as not to leak, break, or allow discharge. If the reserve pit requires padding prior to lining (due to rocky conditions) felt padding will be used.

8. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

9. ANCILLARY FACILITIES

- A. No airstrips or camps are planned for this well.

10. WELLSITE LAYOUT

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The reserve pit will be located on the South side of the location. The flare pit will be located downwind of the prevailing wind direction on the South side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled location topsoil will be stored around Corner #3 and around Corner #6 of the location .

Access to the well pad will be from the Southeast.

Corner #8 will be rounded off to minimize excavation.

11. FENCING REQUIREMENTS:

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until clean-up.

12. PLANS FOR RESTORATION OF SURFACE

A. PRODUCING LOCATION

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours.

The reserve pit will be reclaimed within 12 months from the date of well completion. Before any dirt work takes place, the reserve pit will be completely dry and all cans, barrels, pipe, fluid, and hydrocarbons, will be removed.

Contact appropriate surface management agency for required seed mixture.

B. DRY HOLE/ABANDONED LOCATION

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BIA will attach the appropriate surface rehabilitation conditions of approval.

13. **SURFACE OWNERSHIP**

Access road: Tribal

Location: Tribal

14. **OTHER INFORMATION**

A. Dominion Exploration & Production, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to:

-whether the materials appear eligible for the National Register of Historic Places;

-the mitigation measures the operator will likely have to undertake before the site can be used.

-a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs.

The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

B. As operator, Dominion Exploration & Production, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BIA, or the appropriate County Extension Office. On BIA administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.

C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on Tribal Lands after the conclusion of drilling operations or at any other time without BIA authorization. However, if BIA authorization is obtained, it is only a temporary measure to allow time to make

arrangements for permanent storage on commercial facilities. (The BIA does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

Additional Surface Stipulations

None

LESSEE'S OR OPERATOR'S REPRESENTATIVE

CONTACTS:

OPERATIONS

Mitchiel Hall
P.O. Box 1360
Roosevelt, UT 84066
Telephone: (435) 722-4521
Fax : (435) 722-5004

PERMITTING

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Telephone: (435) 789-4120
Fax: (435)789-1420


All lease or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. Dominion Exploration & Production, Inc. is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.

CERTIFICATION:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with operations proposed herein will be performed by Dominion Exploration & Production, Inc. and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

Date 8-7-2003




Ed Trotter, Agent

Dominion Exploration & Production, Inc.

SELF-CERTIFICATION STATEMENT

Under Federal regulation, effective June 15, 1988, designation of operator forms are no longer required when the operator is not the 100% record title holder. An operator is now required to submit a self-certification statement to the appropriate office stating that said operator has the right to operate upon the leasehold premises. Said notification may be in the following format:

Please be advised that **Dominion Exploration & Production, Inc.** is considered to be the operator of **Well No. 11-27F**, located in the **NE ¼ SW ¼ of Section 27, T10S, R20E in Uintah County; Lease No. U-29784**; and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by Travelers Casualty and Surety Company of America, Bond #76S 63050 0330.



Carla Christian

Regulatory Specialist

DOMINION EXPLR. & PROD., INC.

HCU #11-27F & #13-27F

LOCATED IN UINTAH COUNTY, UTAH

SECTION 27, T10S, R20E, S.L.B.&M.

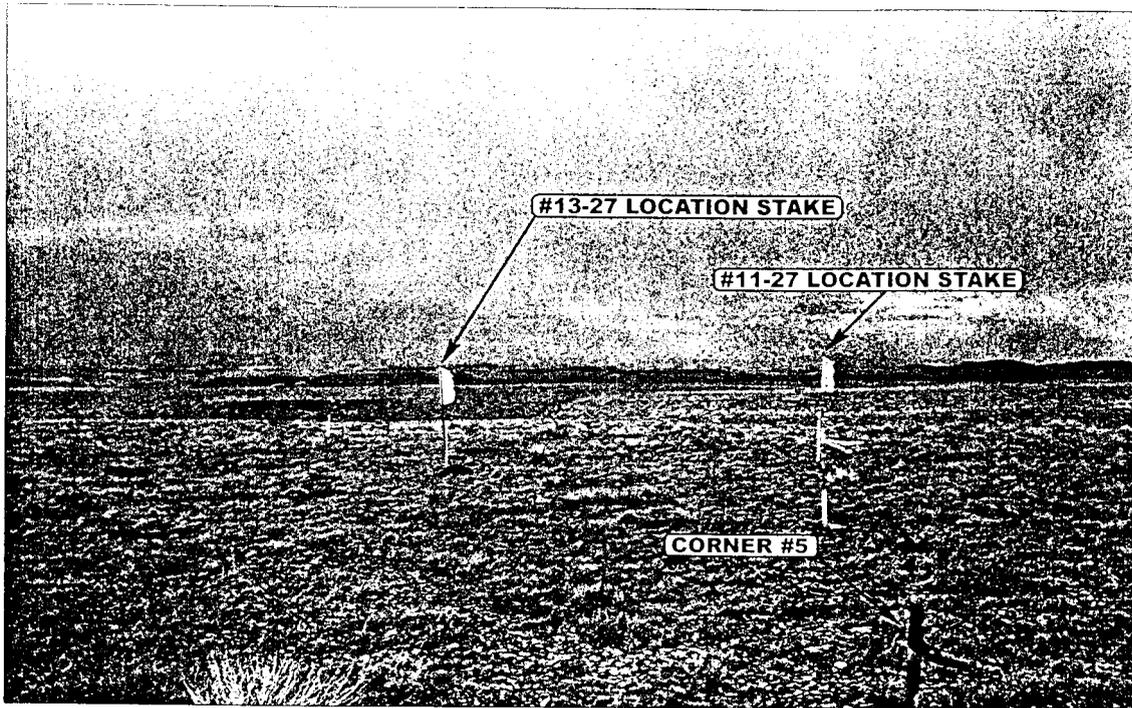


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHEASTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: WESTERLY



- Since 1964 -

UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

5

1

03

MONTH

DAY

YEAR

PHOTO

TAKEN BY: K.K.


DRAWN BY: J.L.G.

REVISED: 00-00-00

DOMINION EXPLR. & PROD., INC.





TYPICAL CROSS SECTIONS FOR

HCU #11-27F & #13-27F
SECTION 27, T10S, R20E, S.L.B.&M.
NE 1/4 SW 1/4



DATE: 05-01-03

Drawn By: D.R.B.

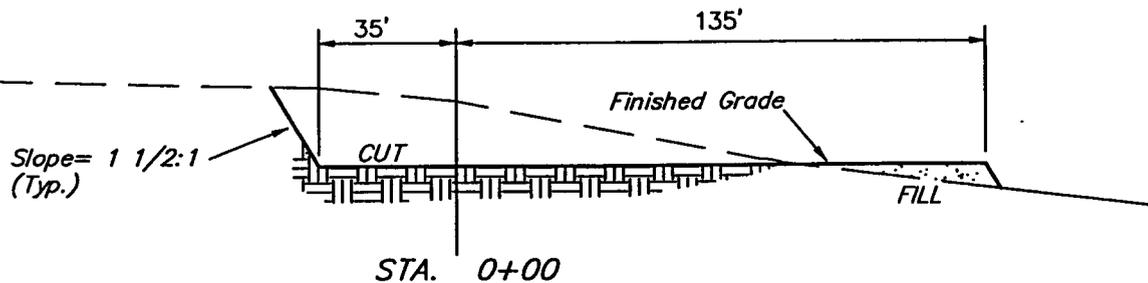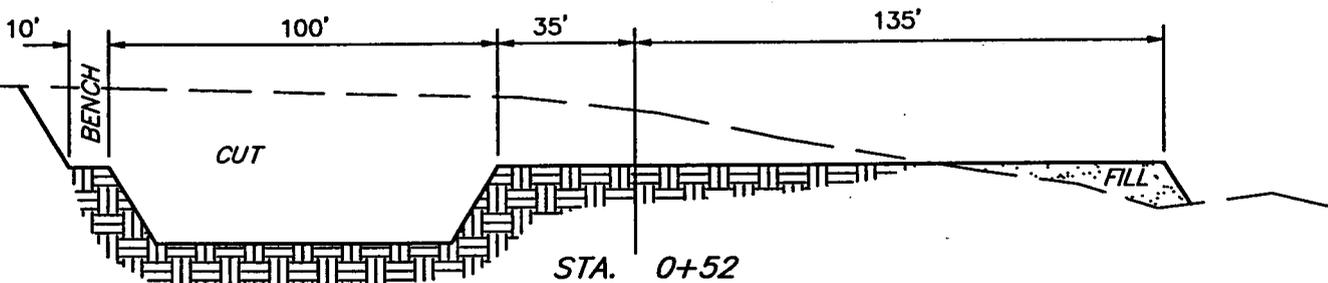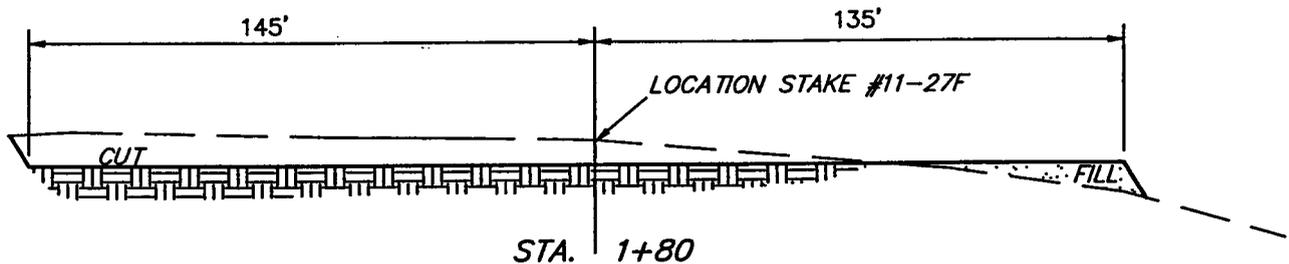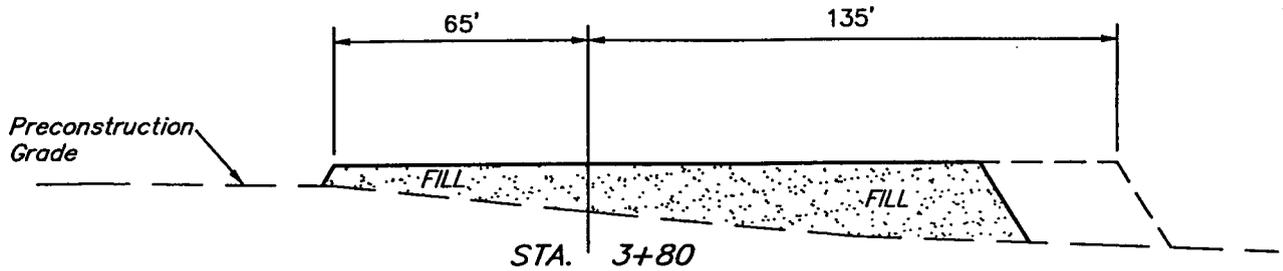


APPROXIMATE YARDAGES

CUT	
(12") Topsoil Stripping	= 3,230 Cu. Yds.
Remaining Location	= 9,110 Cu. Yds.
TOTAL CUT	= 12,340 CU.YDS.
FILL	= 7,200 CU.YDS.

EXCESS MATERIAL AFTER 5% COMPACTION	= 4,760 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 4,760 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

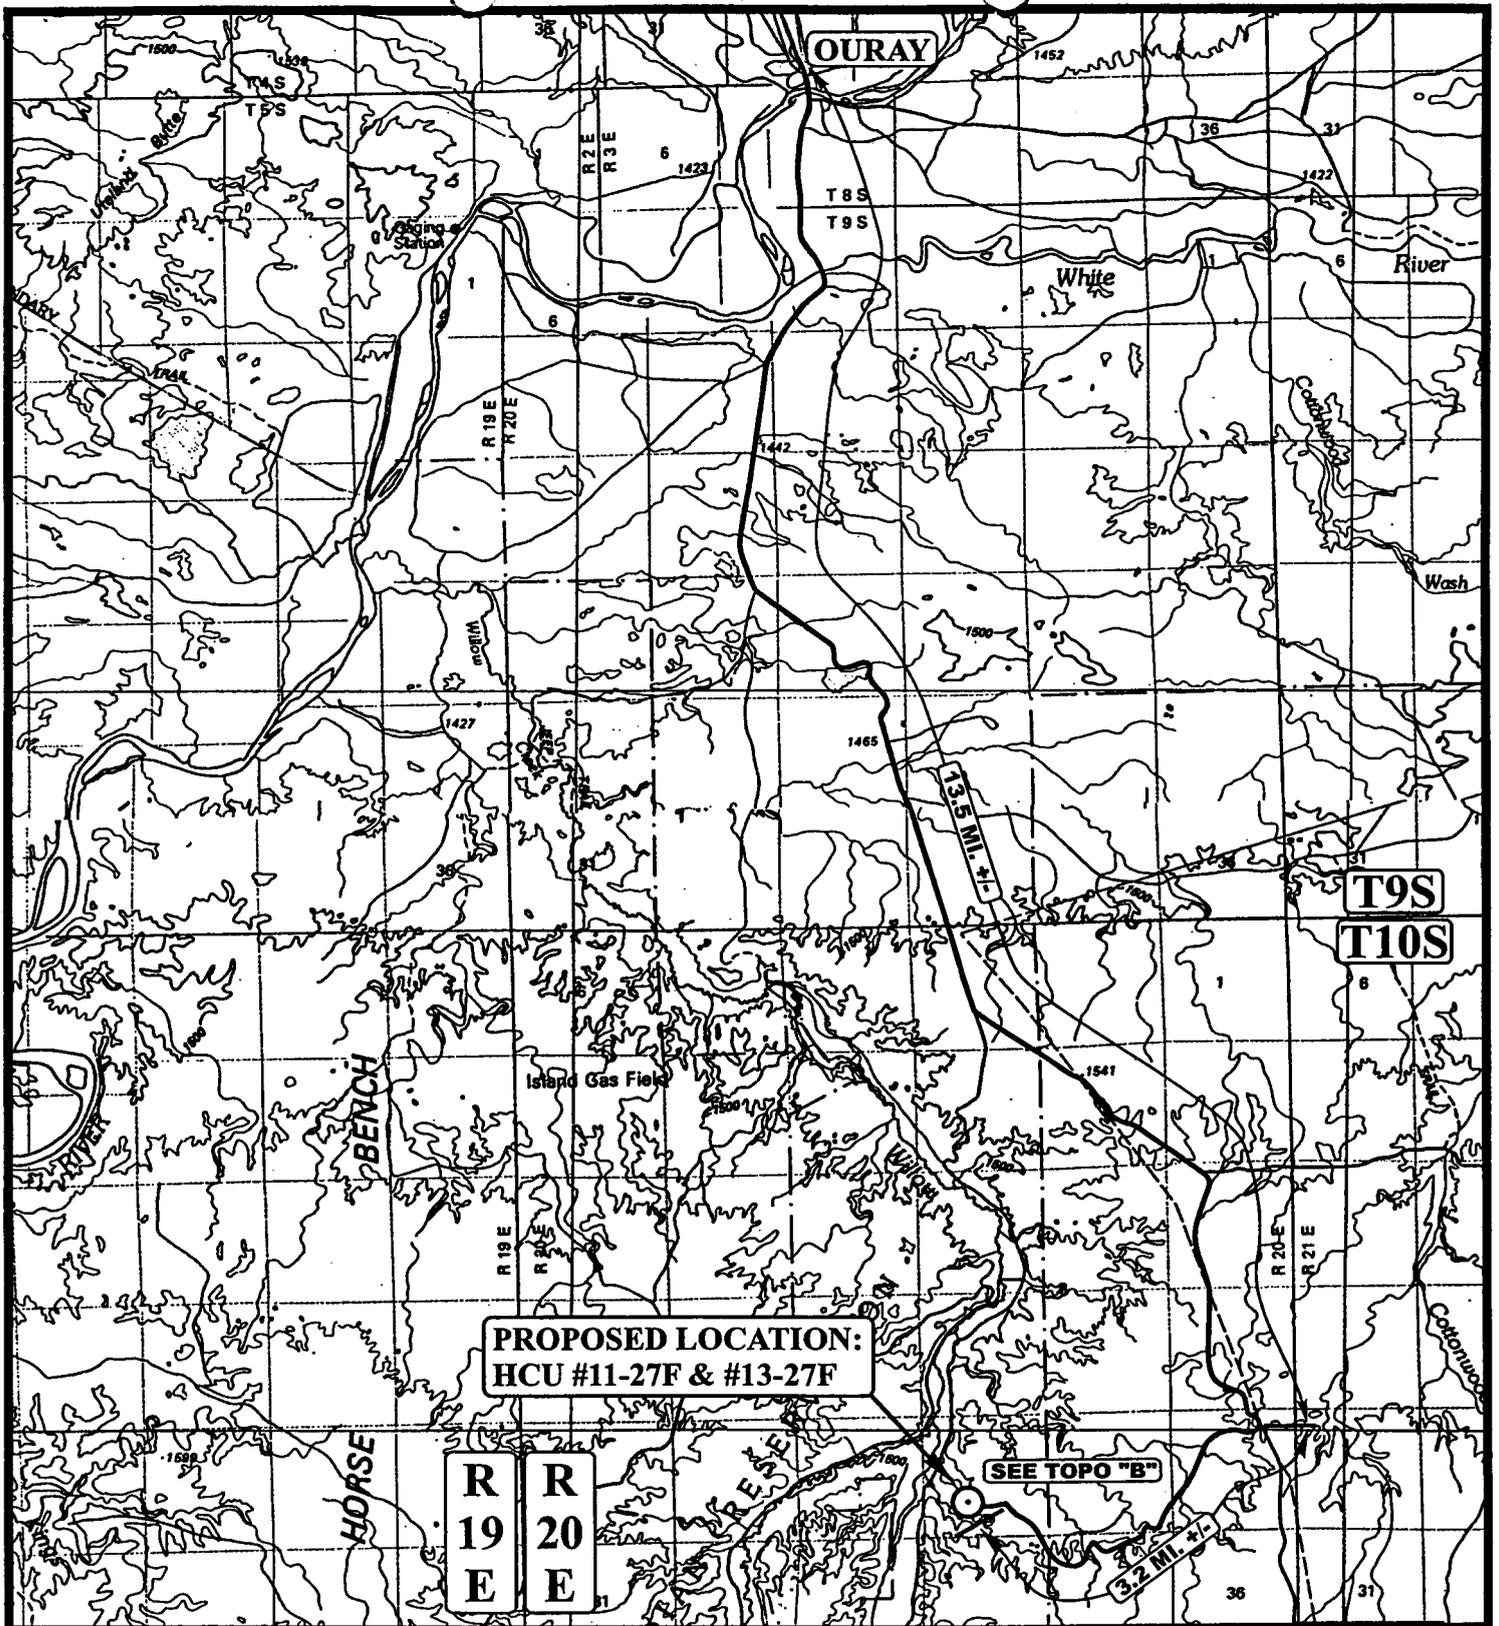

**PROPOSED LOCATION:
HCU #11-27F & #13-27F**

**R R
19 20
E E**

SEE TOPO "B"

3.2 MI. ±

LEGEND:

○ PROPOSED LOCATION



DOMINION EXPLR. & PROD., INC.

**HCU #11-27F & #13-27F
SECTION 27, T10S, R20E, S.L.B.&M.
NE 1/4 SW 1/4**



**Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813**

**TOPOGRAPHIC 5 1 03
MAP MONTH DAY YEAR
SCALE: 1:100,000 DRAWN BY: J.L.G. REVISED: 00-00-00**



R
20
E

PROPOSED LOCATION:
HCU #11-27F & #13-27F

PROPOSED ACCESS 0.2 MI. +/-

OURAY 16.7 MI. +/-

T10S
T11S

LEGEND:

- EXISTING ROAD
- - - - - PROPOSED ACCESS ROAD



DOMINION EXPLR. & PROD., INC.


HCU #11-27F & #13-27F
SECTION 27, T10S, R20E, S.L.B.&M.
NE 1/4 SW 1/4



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC	5	1	03
MAP	MONTH	DAY	YEAR
SCALE: 1" = 2000'	DRAWN BY: J.L.G.		REVISED: 00-00-00



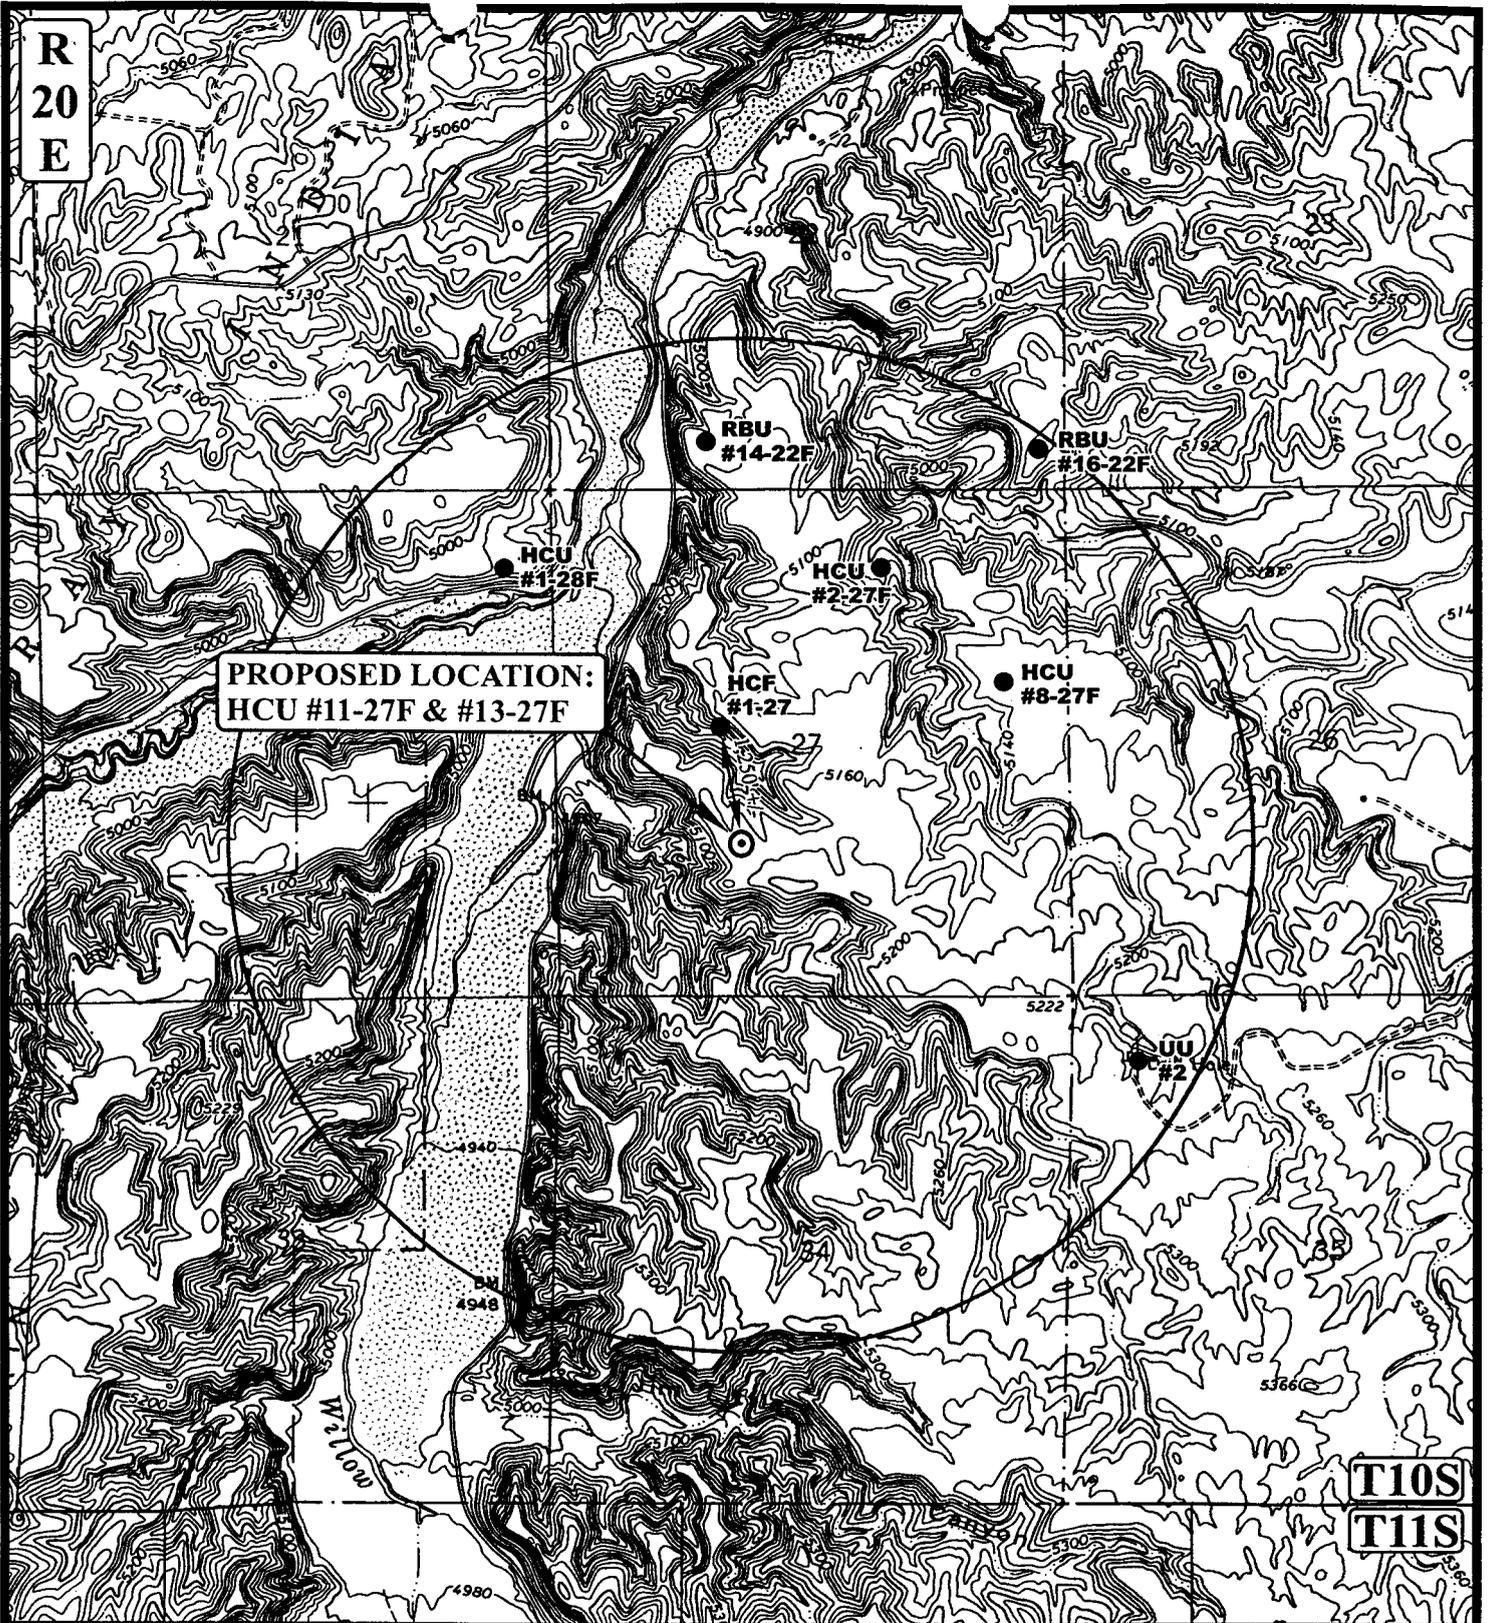

LEGEND:

- ∅ DISPOSAL WELLS
- PRODUCING WELLS
- ⬇ SHUT IN WELLS
- ∅ WATER WELLS
- ⬇ ABANDONED WELLS
- TEMPORARILY ABANDONED



DOMINION EXPLR. & PROD., INC.


HCU #11-27F & #13-27F
SECTION 27, T10S, R20E, S.L.B.&M.
NE 1/4 SW 1/4



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC 5 1 03
MAP MONTH DAY YEAR
 SCALE: 1"=2000' DRAWN BY: J.L.G. REVISED: 00-00-00



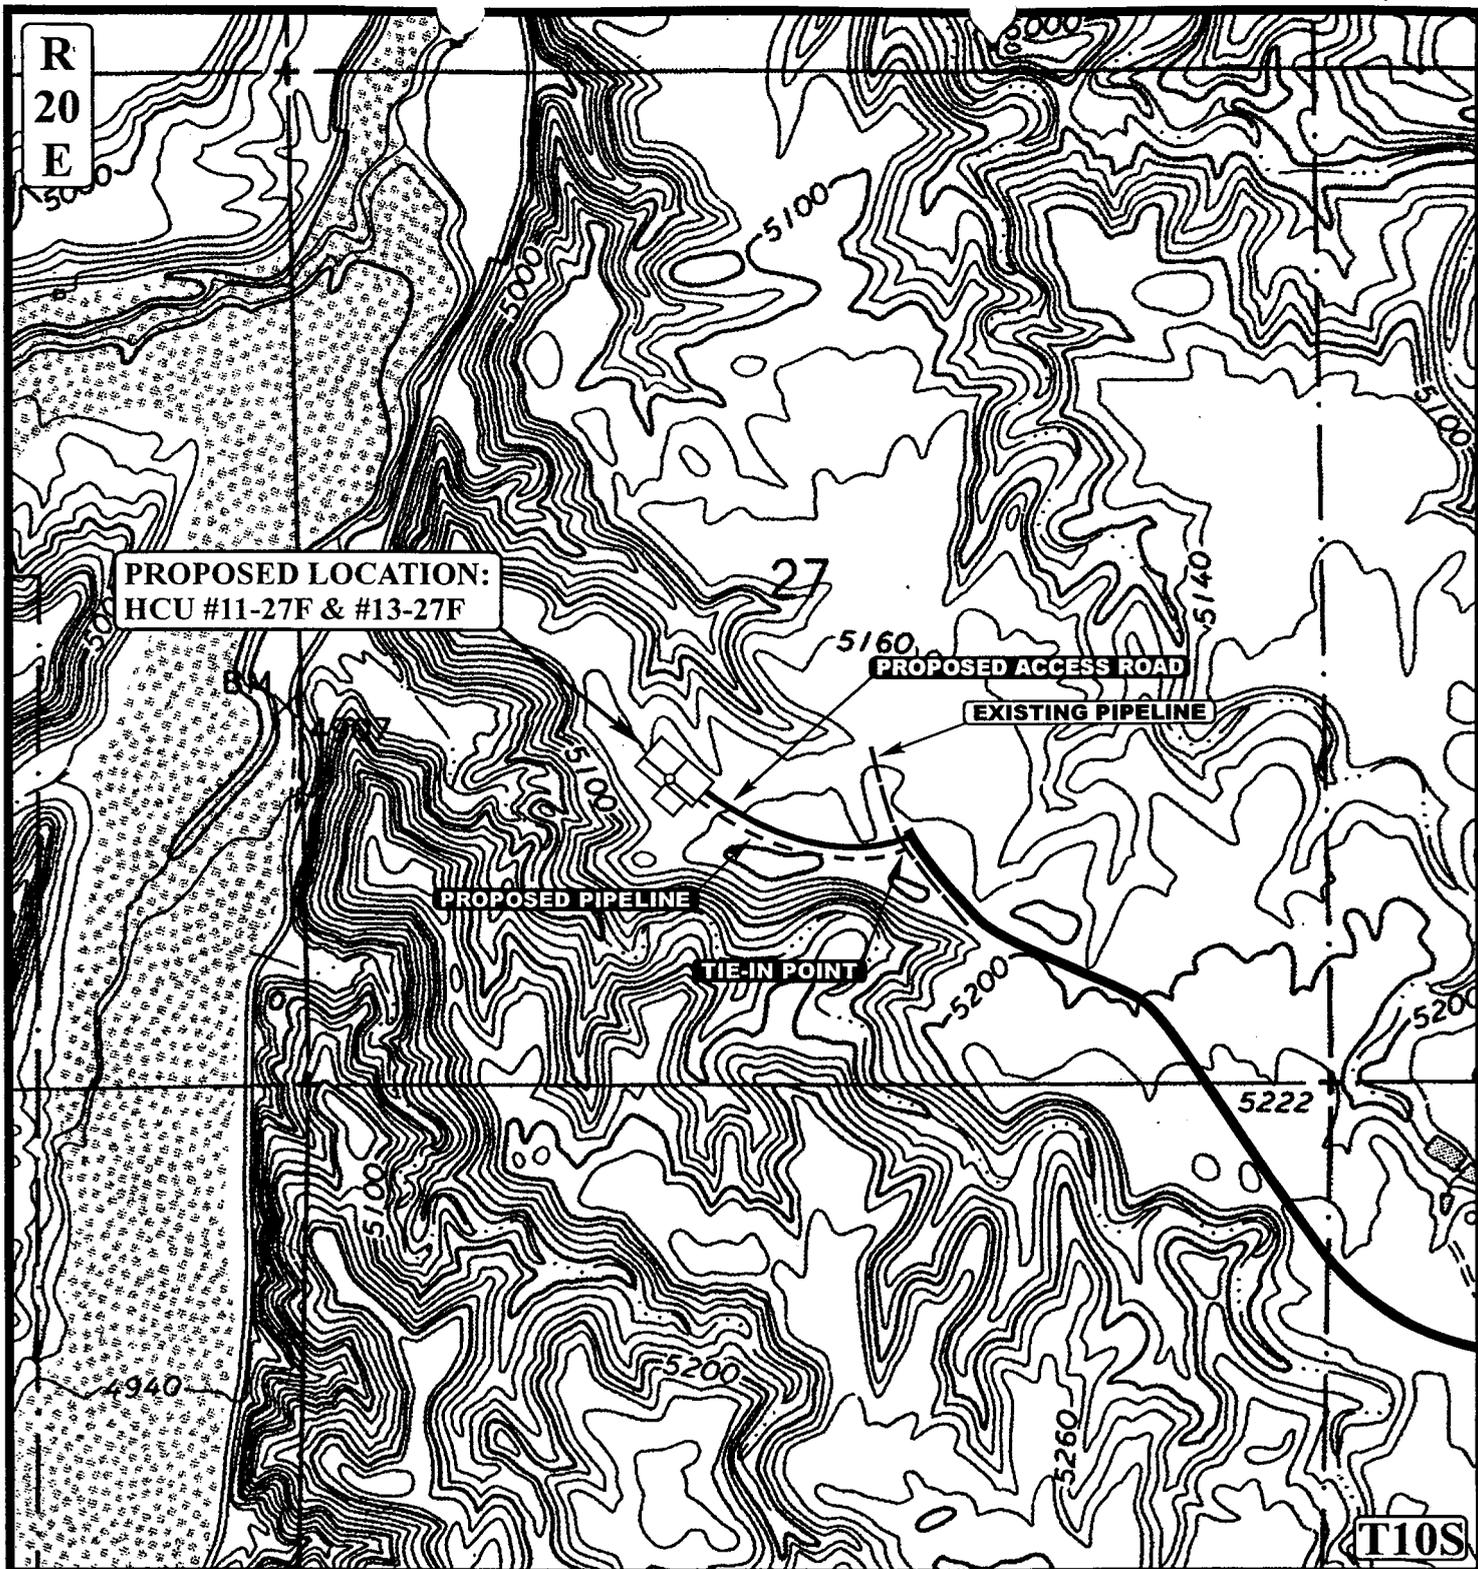

APPROXIMATE TOTAL PIPELINE DISTANCE = 1300' +/-

LEGEND:

- — — — — EXISTING PIPELINE
- - - - - PROPOSED PIPELINE
- PROPOSED ACCESS



DOMINION EXPLR. & PROD., INC.

HCU #11-27F & #13-27F
 SECTION 27, T10S, R20E, S.L.B.&M.
 NE 1/4 SW 1/4



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC 5 1 03
 MAP MONTH DAY YEAR
 SCALE: 1" = 1000' DRAWN BY: J.L.G. REVISED: 00-00-00



WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 08/11/2003

API NO. ASSIGNED: 43-047-35130

WELL NAME: HCU 11-27F

OPERATOR: DOMINION EXPL & PROD (N1095)

CONTACT: CARLA CHRISTIAN

PHONE NUMBER: 405-749-1300

PROPOSED LOCATION:

NESW 27 100S 200E
SURFACE: 1599 FSL 1899 FWL
BOTTOM: 1599 FSL 1899 FWL
UINTAH
NATURAL BUTTES (630)

LEASE TYPE: 1 - Federal

LEASE NUMBER: U-29784

SURFACE OWNER: 2 - Indian

PROPOSED FORMATION: MVRD

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LATITUDE: 39.91550

LONGITUDE: 109.65282

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. 76S630500330)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 43-10447)
- RDCC Review (Y/N)
(Date:)
- Fee Surf Agreement (Y/N)


LOCATION AND SITING:

- R649-2-3.
- Unit HILL CREEK
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: 197-11
Eff Date: 8-17-2000
Siting: 460' From Unit Boundary
- R649-3-11. Directional Drill

COMMENTS:

STIPULATIONS:


1- Federal Approval
2- OIL SHALE

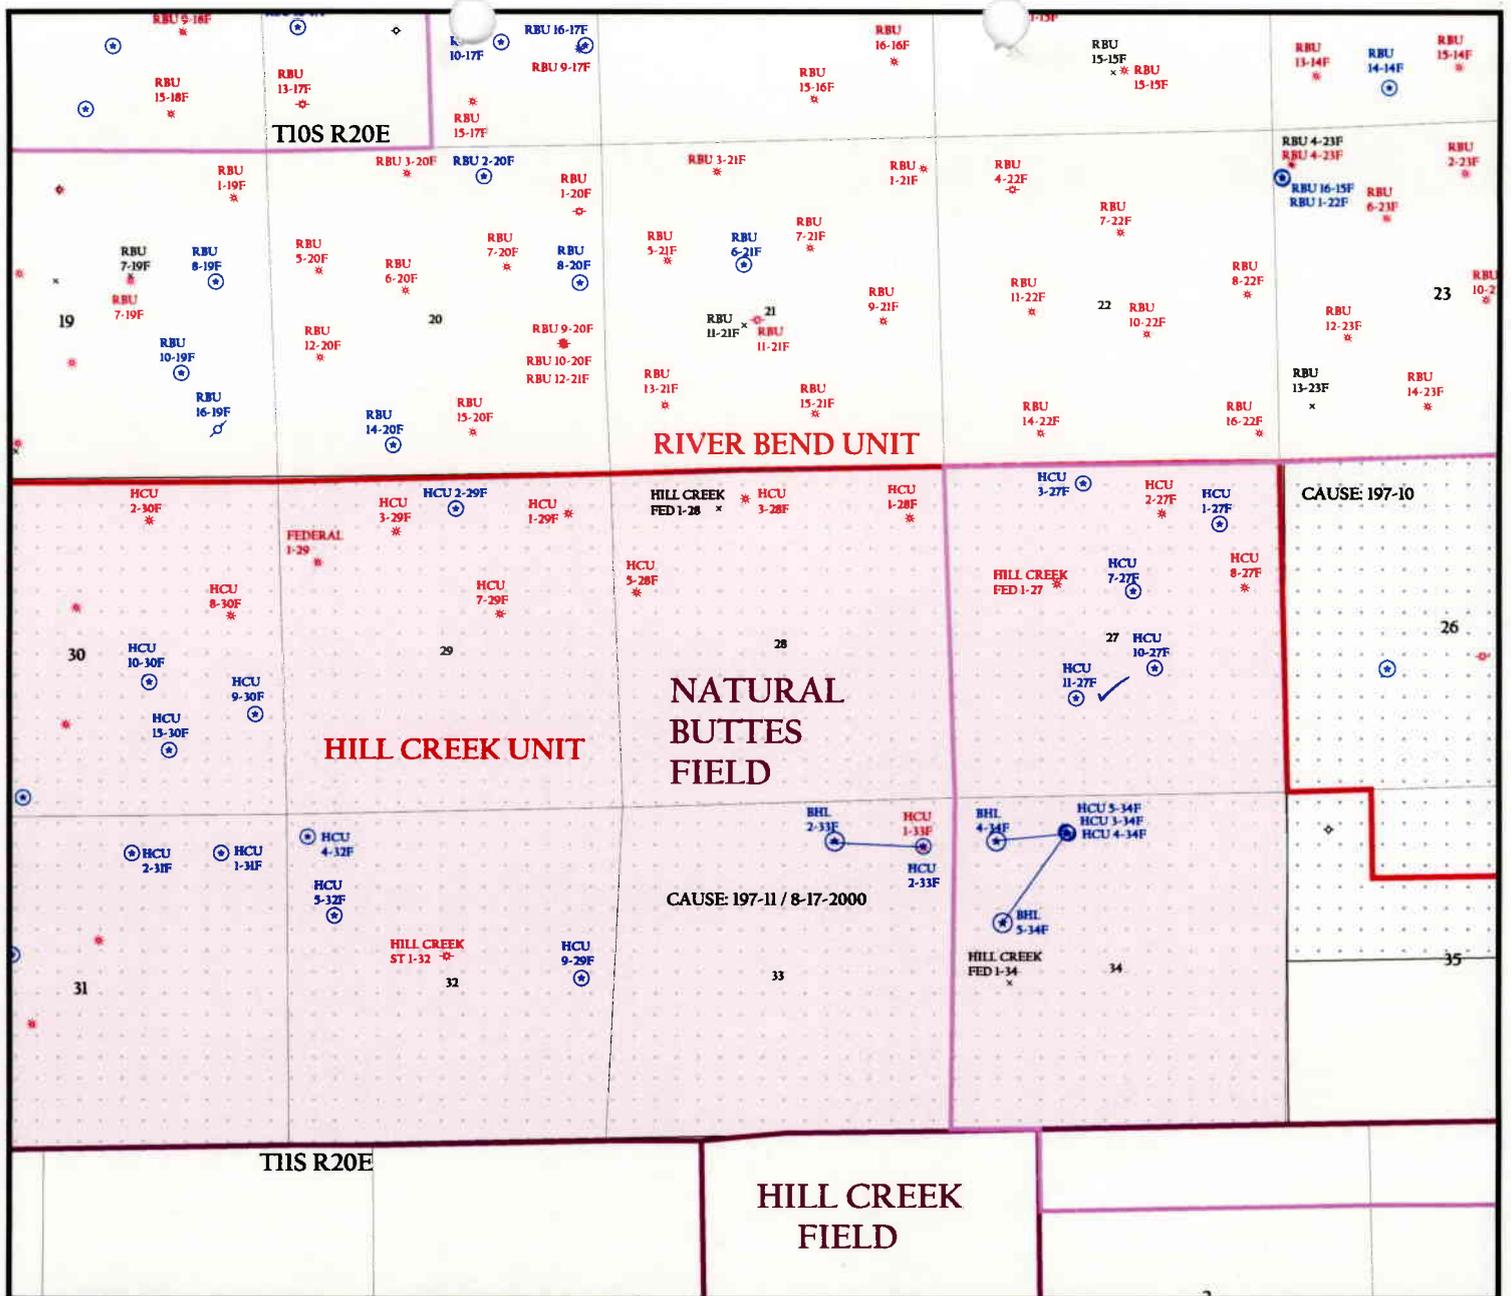

OPERATOR: DOMINION EXPL & PROD (N1095)
SEC. 27 T.10S, R.20E
FIELD: NATURAL BUTTES (630)
COUNTY: UINTAH
CAUSE: 197-11 / 8-17-2000

Wells		Unit Status	
✓	GAS INJECTION	□	EXPLORATORY
•	GAS STORAGE	□	GAS STORAGE
⊙	LOCATION ABANDONED	□	NF PP OIL
⊙	NEW LOCATION	□	NF SECONDARY
•	PLUGGED & ABANDONED	□	PENDING
•	PRODUCING GAS	□	PI OIL
•	PRODUCING OIL	□	PP GAS
•	SHUT-IN GAS	□	PP GEOTHERML
•	SHUT-IN OIL	□	PP OIL
×	TEMP. ABANDONED	□	SECONDARY
△	TEST WELL	□	TERMINATED
•	WATER INJECTION		
•	WATER SUPPLY		
✓	WATER DISPOSAL		

Field Status	
□	ABANDONED
□	ACTIVE
□	COMBINED
□	INACTIVE
□	PROPOSED
□	STORAGE
□	TERMINATED

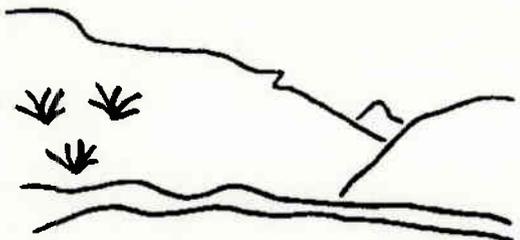

Utah Oil Gas and Mining



PREPARED BY: DIANA MASON
 DATE: 13-AUGUST-2003

United States Department of the Interior

BUREAU OF LAND MANAGEMENT
 Utah State Office
 P.O. Box 45155
 Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:

3160
 (UT-922)

August 15, 2003

Memorandum

To: Assistant District Manager Minerals, Vernal District
 From: Michael Coulthard, Petroleum Engineer
 Subject: 2003 Plan of Development Hill Creek Unit,
 Uintah County, Utah.

Pursuant to email between Diana Mason, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management. The following wells are planned for calendar year 2003 within the Hill Creek Unit, Uintah County, Utah.

Api Number	Well	Location
------------	------	----------

(Proposed PZ MesaVerde)

43-047-35130 HCU 11-27F Sec 27 T10S R20E 1599 FSL 1899 FWL
 43-047-35131 HCU 2-29F Sec 29 T10S R20E 0550 FNL 2456 FEL
 43-047-35132 HCU 9-30F Sec 30 T10S R20E 1606 FSL 0528 FEL
 43-047-35133 HCU 10-30F Sec 30 T10S R20E 2107 FSL 2201 FEL
 43-047-35134 HCU 1-31F Sec 31 T10S R20E 0611 FNL 1061 FEL
 43-047-35135 HCU 12-31F Sec 31 T10S R20E 1865 FSL 0609 FWL
 43-047-35136 HCU 5-32F Sec 32 T10S R20E 1618 FNL 0749 FWL

43-047-35137 HCU 2-33F Sec 33 T10S R20E 0777 FNL 0501 FEL
 BHL Sec 33 T10S R20E 0700 FNL 1900 FEL

43-047-35138 HCU 4-34F Sec 34 T10S R20E 0564 FNL 1771 FWL
 BHL Sec 34 T10S R20E 0700 FNL 0650 FWL

43-047-35139 HCU 5-34F Sec 34 T10S R20E 0579 FNL 1792 FWL
 BHL Sec 34 T10S R20E 2000 FNL 0750 FWL

This office has no objection to permitting the wells at this time.

/s/ Michael L. Coulthard



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

1594 West North Temple, Suite 1210
PO Box 145801
Salt Lake City, Utah 84114-5801
(801) 538-5340 telephone
(801) 359-3940 fax
(801) 538-7223 TTY
www.nr.utah.gov

Michael O. Leavitt
Governor
Robert L. Morgan
Executive Director
Lowell P. Braxton
Division Director

August 18, 2003

Dominion Exploration & Production, Inc.
14000 Quail Springs Parkway, Suite 600
Oklahoma City, OK 73134

Re: Hill Creek Unit 11-27F Well, 1599' FSL, 1899' FWL, NE SW, Sec. 27, T. 10 South,
R. 20 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-35130.


Sincerely,

A handwritten signature in black ink, appearing to read "John R. Baza".

John R. Baza
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office



UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

015

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work **DRILL** **REENTER**

1b. Type of Well: Oil Well Gas Well Other SINGLE ZONE MULTIPLE ZONE

2. Name of Operator
Dominion Exploration & Production, Inc.

3a. Address **14000 Quail Spgs Parkway, Okla. City, OK 73134** 3b. Phone No. (include area code) **405-749-1300**

4. Location of Well (Report location clearly and in accordance with any state requirements.)*
At surface **1599' FSL & 1899' FWL, NE/SW**
At proposed prod. zone

14. Distance in miles and direction from nearest town or post office*
16.7 miles South of Ouray

15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drlg. unit line, if any) **1599'**
16. No. of Acres in lease **640**

17. Spacing Unit dedicated to this well **40**
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. **1250'**
19. Proposed Depth **8,000**

20. BLM/BIA Bond No. on file **76S 63050 0330**
21. Elevations (Show whether DF, KDB, RT, GL, etc.) **5173'**
22. Approximate date work will start* **01-Jun-04**
23. Estimated duration **45 days**

5. Lease Serial No.
U-29784

6. If Indian, Allottee or Tribe Name
Ute Indian Tribe

7. If Unit or CA Agreement, Name and No.
Hill Creek Unit

8. Lease Name and Well No.
HCU 11-27F

9. API Number
43-047-35130

10. Field and Pool, or Exploratory
Natural Buttes

11. Sec., T., R., M., or Blk and Survey or Area
27-10S-20E

12. County of Parish **Uintah** 13 State **UT**

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- 1. Well plat certified by a registered surveyor.
- 2. A Drilling Plan.
- 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- 5. Operator certification.
- 6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature *Carla Christian* Name (Printed/Typed) **Carla Christian** Date **August 7, 2003**

Title **Regulatory Specialist**

Approved by (Signature) *[Signature]* Name (Printed/Typed) **Assistant Field Manager** Date **12/05/2003**

Title **Assistant Field Manager** Office **Mineral Resources**

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

RECEIVED
DEC 15 2003

DIV. OF OIL, GAS & MINING

WDOGMA -
NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED

03450578A

05/25/03

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Dominion Exploration & Production Inc.

Well Name & Number: HCU 11-27F

API Number: 43-047-35130

Lease Number: UTU - 29784

Location: NESW Sec. 27 TWN: 10S RNG: 20E

Agreement: HILL CREEK UNIT

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

CONDITIONS OF APPROVAL FOR NOTICE TO DRILL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Submit an electronic copy of all logs run on this well in LAS format. This submission will replace the requirement for submittal of paper logs to the BLM.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

A. DRILLING PROGRAM

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands encountered to John Mayers of this office prior to setting the next casing string or requesting plugging orders. Faxed copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a **3M** system and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

If an air compressor is on location and is being utilized to provide air for the drilling medium while drilling, the special drilling requirements in Onshore Oil and Gas Order No. 2, regarding air or gas drilling shall be adhered to. If a mist system is being utilized then the requirement for a deduster shall be waived.

3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint. Surface casing setting depths are based on ground level elevations only.

As a minimum, the usable water shall be isolated and/or protected by having a cement top for the intermediate casing at least 200 ft. above the top of the Green River Formation, identified at \pm 920 ft. and having a cement top for the production casing at least 200 ft. above the base of the usable water zone, identified at 5,170 ft. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

All Drill Stem tests (DST) shall be accomplished during daylight hours, unless specific approval to start during other hours is obtained from the AO. However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e., lighting which is adequate for visibility and vapor proof for safe operations). Packers can be released, but tripping should not begin before daylight unless prior approval is obtained from the AO.

A cement bond log (CBL) will be run from the production casing shoe to top of the cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. Two copies of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the AO.

6. Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig. The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Such notification will be sent by telegram or other written communication, not later than five (5) days following the date on which the well is placed on production.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-5(d) shall be submitted to the appropriate Field Office within 60 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (1).

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within thirty (30) days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery. All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries and tested for meter accuracy at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office.

All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, you must contact one of the following individuals:

Ed Forsman (435) 828-7874 BLM FAX Machine (435) 781-4410
Petroleum Engineer

Kirk Fleetwood (435) 828-7875
Petroleum Engineer

EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids

COAs Page 7 of 8

Well No.: Hill Creek Unit 11-27F: and 13-27F multi-well pad

**SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

Dominion Exploration and Production, Inc. (Dominion) will assure the Ute Tribe that any/all contractors and subcontractors have acquired a current Tribal Business License and have updated "Access Permits" prior to construction. All Dominion personnel, contractors and subcontractors will have these permits in their vehicles at all times. Companies that have not complied with this COA will be in violation of the Ute Tribal Business License Ordinance, and will be subject to fines and penalties.

Dominion employees, representatives, and/or authorized personnel (subcontractors) shall not carry firearms on their person or in their vehicles while working on the Uintah and Ouray Indian Reservation.

Dominion employees and/or authorized personnel (subcontractors) in the field will have approved applicable APDs and/or ROW permits/authorizations on their person(s) during all phases of construction.

Dominion will notify the Ute Tribe and Bureau of Indian Affairs (BIA) in writing of any requested modification of APDs or Rights-Of Way (ROW). Dominion shall receive written notification of authorization or denial of the requested modification. Without authorization, Dominion will be subject to fines and penalties.

The Ute Tribe Energy & Minerals Department shall be notified in writing 48 hours in advance of any construction activity. The Ute Tribal office is open Monday through Thursday. A Tribal Technician is to routinely monitor construction. Dominion shall make arrangements with the Ute Energy & Minerals Department for all monitoring that will exceed regular working hours for Tribal Technicians. A qualified archaeologist accompanied by a Tribal Technician will monitor any trenching construction of the pipeline.

A corridor ROW, 60 feet wide and 1052 feet long, shall be granted by BIA for the pipeline and for the access road. The constructed, travel width of the access road will be limited to 18 feet. Upon authorization by the Ute Tribe Energy & Minerals Department, the ROW may be wider where sharp curves; deep cuts and fills occur; or, where intersections with other roads are required.

Culverts and diversion ditches will be placed and constructed where needed. Road base gravel will be used where sandy soils make roadways and the drilling location hazardous for access or drilling operations.

Upon completion of the pertinent APD and ROWs, Dominion will notify the Ute Tribe Energy & Minerals Department for a Tribal Technician to verify the Affidavit of Completion.

Production waters, oil, and other byproducts shall not be placed on access roads or the well pad.

All vehicular traffic, personnel movement, construction and restoration operations will be confined to the areas examined and approved and to the existing roadways and/or evaluated access routes.

Dominion will implement "Safety and Emergency Plan" and ensure plan compliance.

Dominion shall stop construction activities and notify personnel from the Ute Tribe Energy & Minerals Department and BIA if cultural remains including paleontology resources (vertebrate fossils) are exposed or identified during construction. The Ute Tribe Department of Cultural Rights and Protection and the BIA will provide mitigation measures prior to allowing construction.

Dominion employees and/or authorized personnel (subcontractors) will not be allowed to collect artifacts and paleontology fossils. No significant cultural resources shall be disturbed.

Dominion will control noxious weeds on the well site and ROWs. Dominion will be responsible for noxious weed control if weeds spread from the project area onto adjoining land.

Reserve pits will be lined with an impervious synthetic liner. A fence will be constructed around the reserve pit until it is backfilled. Prior to backfilling the reserve pit, all fluids will be pumped from the pit into trucks and hauled, to approved disposal sites. When the reserve pits are backfilled, the surplus oil and mud, etc., will be buried a minimum of 3 feet below the surface of the soil.

A closed system will be used during production. This means that production fluids will be contained in leak-proof tanks. All production fluids will be disposed of at approved disposal sites.

Surface pipelines will be constructed to lay on the soil surface. The pipeline portion of the ROW will not be bladed or cleared of vegetation without authorization of the BIA. Surface pipelines shall be welded in place at well sites or on access roads. They shall be pulled into place and assembled with suitable equipment. Vehicles shall not use pipeline ROWs as access roads unless specifically authorized.

Buried pipelines shall be buried a minimum of 3 feet below the soil surface. After construction is completed the disturbed area shall be contoured to blend into the natural landscape and be reseeded between September 15 and November 1 of the year following construction with perennial vegetation seed mixture provided by the BIA or Ute Tribe.

Before the site is abandoned, Dominion will be required to restore the well site and ROWs to near their original state. The disturbed areas will be reseeded with desirable perennial vegetation.

Soil erosion will be mitigated, by reseeding all disturbed areas.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

008

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
U-29784

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

8. Well Name and No.
HCU 11-27F

9. API Well No.
43-047-35130

10. Field and Pool, or Exploratory
NATURAL BUTTES

11. County or Parish, and State
UINTAH COUNTY, UT

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
DOMINION EXPL. & PROD., INC. Contact: CARLA CHRISTIAN
E-Mail: Carla_M_Christian@dom.com

3a. Address
14000 QUAIL SPRINGS PARKWAY, SUITE 600
OKLAHOMA CITY, OK 73134

3b. Phone No. (include area code)
Ph: 405.749.5263
Fx: 405.749.6690

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 27 T10S R20E NESW 1599FSL 1899FWL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Well Spud
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Spud well 4/03/04. 4/4/04 ran 12 jts. 13 3/8", 48#, H-40, 8rd csg., set @ 523. Cemented w/460 sks Prem, weight 15.6, Yield 1.18, 10 bbls cmt. returned to surface. WODU

RECEIVED
APR 12 2004
DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct.
Electronic Submission #29387 verified by the BLM Well Information System For DOMINION EXPL. & PROD., INC., sent to the Vernal

Name (Printed/Typed) CARLA CHRISTIAN Title AUTHORIZED REPRESENTATIVE

Signature *Carla Christian* (Electronic Submission) Date 04/07/2004

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****

007

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

RECEIVED

FORM 6

APR 09 2004

ENTITY ACTION FORM

DIV. OF OIL, GAS & MINING

Operator: Dominion Exploration & Production, Inc.
Address: 14000 Quail Springs Parkway, Suite 600
city Oklahoma City
state Ok zip 73134

Operator Account Number: N 1095
Phone Number: (405) 749-1300

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
43-047-35130	HCU 11-27F		NESW	27	10S	20E	Uintah
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
<i>AB</i>	<i>99999</i>	<i>12829</i>	<i>4/3/2004</i>			<i>4/15/04</i>	
Comments: <i>MURD</i>							

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
Comments:							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
Comments:							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Carla Christian

Name (Please Print)

Carla Christian

Signature

Regulatory Specialist

Title

4/6/2004

Date

009



FAX COVER

To: Carol Daniels

Company : Utah Division of Oil, Gas & Mining

Fax Number : 18013593940

From : Terri Potter

Company : Dominion Exploration & Production

Fax Number : (405) 749-6675

Subject : HCU 11-27F
T105 R20E S-29 43-049-35130

Pages including cover page: 3

Date : 4/14/2004

Time : 3:34:24 PM

E-mail Address: Terri_R_Potter@dom.com
 Phone Number: (405) 749-5256

RECEIVED
 APR 13 2004
 DIV. OF OIL, GAS & MINING



WELL CHRONOLOGY REPORT

WELL NAME : HCU 11-27F
DISTRICT : ONSHORE WESTFIELD : NATURAL BUTTES 630

Event No: 1

LOCATION : 1599 FSL 1899 FWL SEC 27 T 10S R 20ECOUNTY & STATE : UINTAHUT

CONTRACTOR : .

WI % : 100.00000 AFE # : 401067API # : 43-047-35130PLAN DEPTH 8,000

SPUD DATE : .

DHC : \$392,500CWC : \$471,500AFE TOTAL : \$864,000FORMATION : WASATCH/MESAVERDEREPORT DATE: 04/04/04MD : 285TVD : 385DAYS : 1

MW : .

VISC : .

DAILY : DC : \$0CC : \$0TC : \$0CUM : DC : \$0CC : \$0TC : \$0

DAILY DETAILS RIG UP DRILL SURFACE TO 270'

REPORT DATE: 04/05/04MD : 285TVD : 285DAYS : 2

MW : .

VISC : .

DAILY : DC : \$0CC : \$0TC : \$0CUM : DC : \$28,005CC : \$0TC : \$28,005

DAILY DETAILS FINISH DRILLING SURFACE TO 540' RUN 12 JTS. 13 3/8" CSG TO 522' RIG DOWN RATHOLE MACHINE.

REPORT DATE: 04/06/04MD : 540TVD : 540DAYS : 3

MW : .

VISC : .

DAILY : DC : \$0CC : \$0TC : \$0CUM : DC : \$37,144CC : \$0TC : \$37,144

DAILY DETAILS PUMP 460 SX PREM CEMENT. 2% CACL .25 LB/SX FLOCELE.WEIGHT 15.6, YIELD 1.18, WATER 5.2.

SET IN CELLAR RING, AND LEVEL LOCATION PIT SIDE. MOVE IN AND RIG UP TRUE RIG # 26 IN UNITAH CO. UTAH. SURFACE LOCATION 1599 FSL & 1899 FWL. NE/SW SECTION 27 T10S R20E. G. ELEV 5173'. RIG KB 12' WO CREWS TO FINISH RIGGING UP

REPORT DATE: 04/07/04MD : 1,035TVD : 1,035DAYS : 4

MW : .

VISC : .

DAILY : DC : \$110,688CC : \$0TC : \$110,688CUM : DC : \$147,832CC : \$0TC : \$147,832

DAILY DETAILS FINISH RIGGING UP. PICK UP DOWNHOLE MOTOR, SHOCK SUB, 3-8" D/COLLARS AND 6 1/2" D/COLLARS. DRILL INSERT AT 492' CEMENT AND SHOE AT 535' DRILL 12 1/4" HOLE FROM 535' TO 604"

SERVICE RIG RUN TOTCO SURVEY AT 524'. .25 DEG. DRILL FROM 604' TO

REPORT DATE: 04/08/04MD : 2,230TVD : 2,230DAYS : 5MW : 8.4VISC : 27DAILY : DC : \$23,814CC : \$0TC : \$23,814CUM : DC : \$171,646CC : \$0TC : \$171,646

DAILY DETAILS DRILL FROM 1035' TO 1104' RUN TOTCO SURVEY AT 1024. 1/2 DEG. DRILL FROM 1104' TO 1359 RIG SERVICE. DRILL FROM 1359' TO 1614' RUN TOTCO SURVEY AT 1534' 1/2 deg. DRILL FROM 1614' TO 2230' CIRC. WORK PIPE, DROP TOTCO SURVEY, PUMP PILL TRIP OUT TO RUN 8 5/8" CASING.

REPORT DATE: 04/09/04MD : 3,050TVD : 3,049DAYS : 6MW : 8.5VISC : 27DAILY : DC : \$75,027CC : \$0TC : \$75,027CUM : DC : \$246,673CC : \$0TC : \$246,673

DAILY DETAILS FINISH TRIP OUT WITH D/PIPE. AND 15- 6 1/2" D/COLLARS. LAY DOWN 3-8" D/COLLARS. 6-6 1/2" D/COLLARS. SHOCK SUB AND DOWNHOLE MOTOR. HSM. RIG UP CALIBER CASING TONGS. RUN 51 JTS 8 5/8" 32 LB. J-55 ST&C CASING. SET AT 2200' FLOAT AT 2155' PICK UP LANDING JT., MAKE UP CASING HANGER, LAND 8 5/8 CASING, RIG UP CEMENTING HEAD. CIRC. HSM. TEST LINES TO 4000 PSI, PUMP 20 BLS 8.5 GEL. and 5 BLS FRESH WATER AHEAD OF 281 BLS (385 SX) CBM LITE MIXED WITH .25% FLOCELE AND 10# GILSONITE. WEIGHT 10.5, YIELD 4.17 CUFT/SX, WATER 26.27 GP/SX. TAIL PREMAG 300 76 BLS (370 SX) MIXED WITH 2 % CACL .25 # FLOCELE WEIGHT 15.8, YIELD 1.15 CUFT/SX, WATER 5.0 GP/SX. DROP PLUG DISPLACE WITH 131.2 BLS WATER. BUMP PLUG WITH 435 PSI OVER. GOOD RETURNS, 157 BLS CEMENT RETURNS. CIP 13:15 HRS N/D AND NIPPLE UP BOP STACK. TEST BOPE, UPPER AND LOWER KELLY VALVES, INSIDE BOP, PIPE AND BLIND RAMS, KILL LINE, CHOKE LINE AND MANIFOLD TESTED TO 3,000 PSI. TESTED ANNULAR PREVENTER AND 8 5/8 INTERMEDIATE TO 1,500 PSI. CALLED BLM (ED FORSMAN) AT 13:30 HRS. NO ONE FROM BLM ON LOCATION TO WITNESS BOP TEST. MAKE UP BIT, DOWNHOLE MOTOR RIH TO 2150' DRILL FLOAT AT 2155' CEMENT AND SHOE AT 2200'. LOT AT 2240' 180 PSI DRILL FROM 2240' TO 3050

RECEIVED

APR 13 2004



WELL CHRONOLOGY REPORT

WELL NAME : HCU 11-27F

Event No: 1

DISTRICT : ONSHORE WESTFIELD : NATURAL BUTTES 630LOCATION : 1599 FSL 1899 FWL SEC 27 T 10S R 20ECOUNTY & STATE : UINTAH

UT

CONTRACTOR :

WI % : 100.00000 AFE # : 401067API # : 43-047-35130PLAN DEPTH 8,000 SPUD DATE :DHC : \$392,500CWC : \$471,500AFE TOTAL : \$864,000FORMATION : WASATCH/MESAVERDE

REPORT DATE: 04/10/04 MD : 5,322 TVD : 5,319 DAYS : 7 MW : 8.5 VISC : 27
 DAILY : DC : \$20,837 CC : \$0 TC : \$20,837 CUM : DC : \$267,510 CC : \$0 TC : \$267,510

DAILY DETAILS RUN TOTCO SURVEY. MISS RUN. DRILL FROM 3050' TO 3082' RUN TOTCO SURVEY AT 3002', 1.5 DEG. DRILL FROM 3082' TO 3595' RUN TOTCO SURVEY AT 3515' 3. DEG. DRILL FROM 3595' TO 4074' RUN TOTCO SURVEY AT 3994' 3 DEG. DRILL FROM 4074' TO 4553' RUN TOTCO SURVEY AT 4473 3 1/4 DEG. DRILL FROM 4453' TO 4967' RUN TOTCO SURVEY AT 4887, 3 1/2 DEG. DRILL FROM 4967' TO 5322'

REPORT DATE: 04/11/04 MD : 6,440 TVD : 6,436 DAYS : 8 MW : 8.5 VISC : 27
 DAILY : DC : \$21,821 CC : \$0 TC : \$21,821 CUM : DC : \$289,331 CC : \$0 TC : \$289,331

DAILY DETAILS DRILL FROM 5322' TO 5380 RUN TOTCO SURVEY AT 5300' 3 DEG. DRILL FROM 5380' TO 5635' RUN TOTCO SURVEY AT 5555' 3 DEG. DRILL FROM 5635' TO 5857 RUN TOTCO SURVEY AT 5777' 2 1/2 DEG. DRILL FROM 5857' TO 6364' RUN TOTCO SURVEY AT 6284' 2 DEG. DRILL FROM 6364' TO 6440'

REPORT DATE: 04/12/04 MD : 7,065 TVD : 7,062 DAYS : 9 MW : 8.5 VISC : 27
 DAILY : DC : \$16,420 CC : \$0 TC : \$16,420 CUM : DC : \$305,751 CC : \$0 TC : \$305,751

DAILY DETAILS DRILL FROM 6440' TO 6594' PUMP PILL DROP SURVEY. TRIP OUT FOR BIT. SLIP AND CUT 120' D/LINE. TRIP IN WASH AND REAM 30' TO BOTTOM DRILL FROM 6594' TO 7065

REPORT DATE: 04/13/04 MD : 7,627 TVD : 7,623 DAYS : 10 MW : 8.6 VISC : 27
 DAILY : DC : \$17,132 CC : \$0 TC : \$17,132 CUM : DC : \$322,883 CC : \$0 TC : \$322,883

DAILY DETAILS DRILL FROM 7065 TO 7093 RUN TOTCO SURVEY AT 7013, 1 DEG. DRILL FROM 7093 TO 7131 RIG SERVICE TRIP OUT FOR BIT OR MOTOR. CHANGE OUT DOWNHOLE MOTOR. TRIP IN HOLE. WASH AND REAM 15' TO BOTTOM DRILL FROM 7131 TO 7603 RUN TOTCO SURVEY AT 7523 1 DEG DRILL FROM 7603' TO 7637

REPORT DATE: 04/14/04 MD : 8,047 TVD : 8,043 DAYS : 11 MW : 9.3 VISC : 38
 DAILY : DC : \$20,471 CC : \$0 TC : \$20,471 CUM : DC : \$343,354 CC : \$0 TC : \$343,354

DAILY DETAILS DRILL FROM 7627 TO 7761 RIG SERVICE DRILL FROM 7761 TO 8047 CBU, DROP SURVEY. PUMP PILL TRIP OUT FOR LOGS RIG UP BAKER ATLAS LOGGERS. RIH WITH LOGS, HIT BRIDGE AT 7558' TRY TO SPUD THROUGH, LOG OUT OF HOLE.

RECEIVED

APR 13 2004

DIV. OF OIL, GAS & MINING

010



Dominion

FAX COVER

To: Carol Daniels

Company : Utah Division of Oil, Gas & Mining

Fax Number : 18013593940

From : Terri Potter

Company : Dominion Exploration & Production

Fax Number : (405) 749-6675

Subject : HCU 11-27F *T10S R20E S-27 43-042-35130*

Pages including cover page: 2

Date : 4/21/2004

Time : 1:14:44 PM

E-mail Address: Terri_R_Potter@dom.com
 Phone Number: (405) 749-5256

RECEIVED
APR 21 2004
 DIV. OF OIL, GAS & MINING



WELL CHRONOLOGY REPORT

WELL NAME : HCU 11-27F
DISTRICT : ONSHORE WESTFIELD : NATURAL BUTTES 630

Event No: 1

LOCATION : 1599 FSL 1899 FWL SEC 27 T 10S R 20ECOUNTY & STATE : UINTAH

UT

CONTRACTOR : .

WI % : 100.00000 AFE # : 401067API # : 43-047-35130PLAN DEPTH 8,000 SPUD DATE : .DHC : \$392,500CWC : \$471,500AFE TOTAL : \$864,000FORMATION : WASATCH/MESAVERDEREPORT DATE: 04/15/04MD : 8,047TVD : 8,043DAYS : 12MW : 9.4VISC : 35DAILY : DC : \$12,820CC : \$0TC : \$12,820CUM : DC : \$399,426CC : \$0TC : \$399,426

DAILY DETAILS FINISH RUN LOGGS FROM 7558' TRIP IN HOLE TO 7507'

WASH AND REAM THROUGH BRIDGES AT 7507' TO 7571, 7630 AND 7630 TO 7661', RIH TO 8047' CBU.PUMP

PILL TRIP OUT FINISH RUNNING LOGS WITH BAKER ATLAS RIG DOWN BAKER ATLAS/ RIG UP

SCHLUMBERGER LOGGERS SHOOT 31 AND RECOVER 31 SIDEWALL CORES. RIG DOWN SCHLUMBERGER

TRIP IN HOLE TO COME OUT LAYING DOWN.

REPORT DATE: 04/16/04MD : 8,047TVD : 8,043DAYS : 13MW : 9.5VISC : 34DAILY : DC : \$117,455CC : \$0TC : \$117,455CUM : DC : \$516,881CC : \$0TC : \$516,881

DAILY DETAILS FINISH TRIP IN BREAK CIRC. WASH AND REAM 40' TO BOTTOM CBU. PUMP PILL LAY DOWN D/PIPE AND D/COLLARS. RIG UP CALIBER CASING TONGS RUN 5 1/2 CASING REPAIR HYDRAULIC HOSE ON CASING TONGS FINISH RUNNING 189 JTS 5 1/2 17 LB MAV-80 LT & C 8 RD. SEAT AT 8014' MARKER JTS AT 6053 TO 6043 AND 4042 TO 4032. RIG DOWN CASING TONGS/ RIG UP HALLIBURTON CEMENT HEAD AND CIRC. HOLE. TEST LINES TO 4000 PSI. PUMP 5 BLS FRESH WATER, 50 BLS MUD FLUSH AND 10 BLS KCL WATER AHEAD OF 90 Sx HI-FILL 5 MIXED WITH 16 % GEL, .6% EX-1, 3% SALT, .25 LB/SX FLOCELE, 10 LB/Sx GILSONITE. WEIGHT 11.6 PPG. YIELD 3.12 CUFT/Sx, WATER 17.83 GP/Sx.

TAIL, PUMP 785 Sx HLC-5 MIXED WITH 65% CEMENT, 35% POZ, 6% GEL, 3% KCL, 1% EX-1, .6% HALAD-322, .2% HR-5. WEIGHT 13 PPG, YIELD 1.69 CUFT/Sx, WATER 8.81 GP/Sx. DROP PLUG, PUMP 10 BLS WATER MIXED WITH 5 LB SUGAR WATER AND 1 GAL COLOROX. DISPLACE WITH 185 BLS KCL WATER. BUMP PLUG AT 800 PSI OVER. FLOATS HELD. HAD GOOD RETURNS. NO CEMENT TO SURFACE. CIP AT 00:30 HRS. 4/16/2004 LAND 5 1/2 CASING. NIPPLE DOWN, CLEAN MUD TANKS. RELEASE TRUE # 26 AT 04:30 HRS. 4/16/2004

RECEIVED
APR 21 2004
DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
U-29784

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

7. If Unit or CA/Agreement, Name and/or No.

1. Type of Well
 Oil Well Gas Well Other

8. Well Name and No.
HCU 11-27F

2. Name of Operator
DOMINION EXPL. & PROD., INC. Contact: CARLA CHRISTIAN
E-Mail: Carla_M_Christian@dom.com

9. API Well No.
43-047-35130

3a. Address
14000 QUAIL SPRINGS PARKWAY, SUITE 600
OKLAHOMA CITY, OK 73134

3b. Phone No. (include area code)
Ph: 405.749.5263
Fx: 405.749.6690

10. Field and Pool, or Exploratory
NATURAL BUTTES

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 27 T10S R20E NESW 1599FSL 1899FWL

11. County or Parish, and State
UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Drilling Operations
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

4/8/04 ran 51 jts. 8 5/8", 32#, J-55 ST&C csg., set @ 2,200'. Cemented lead w/385 sx CBM Lite, wt. 10.5 ppg, yield 4.17 cuft/sk, tailed w/370 sx Prem AG 300, wt. 15.8 ppg, yield 1.15 cuft/sk, bumped plug, 157 bbls cmt returned. 4/15/04 ran 189 jts. 5 1/2", 17#, Mav-80, LT&C, 8rd csg., set @8014'. Cemented lead w/90 sks Hi Fill 5, wt 11.6 ppg, yield 3.12 cuft/sk. Floats held, good returns, no cmt to surface. Released rig.

RECEIVED
MAY 03 2004
DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct.
Electronic Submission #30112 verified by the BLM Well Information System For DOMINION EXPL. & PROD., INC., sent to the Vernal

Name (Printed/Typed) CARLA CHRISTIAN Title AUTHORIZED REPRESENTATIVE

Signature *Carla Christian* (Electronic Submission) Date 04/29/2004

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****

012



Dominion

FAX COVER

To: Carol Daniels

Company : Utah Division of Oil, Gas & Mining

Fax Number : 18013593940

From : Terri Potter

Company : Dominion Exploration & Production

Fax Number : (405) 749-6675

Subject : HCU 11-27F

T10S R20E S-27 43-047-35130

Pages including cover page: 4

Date : 5/12/2004

Time : 12:38:08 PM

E-mail Address: Terri_R_Potter@dom.com

Phone Number: (405) 749-5256

RECEIVED
MAY 12 2004
DIV. OF OIL, GAS & MINING



WELL CHRONOLOGY REPORT

WELL NAME : HCU 11-27F

Event No: 1

DISTRICT : ONSHORE WESTFIELD : NATURAL BUTTES 630LOCATION : 1599 FSL 1899 FWL SEC 27 T 10S R 20ECOUNTY & STATE : UINTAHUT

CONTRACTOR : .

WI % : 100.00000 AFE # : 401067API # : 43-047-35130PLAN DEPTH 8,000 SPUD DATE : .DHC : \$392,500CWC : \$471,500AFE TOTAL : \$864,000FORMATION : WASATCH/MESAVERDEREPORT DATE: 05/11/04MD : 8,047TVD : 8,043DAYS : 14

MW : .

VISC : .

DAILY : DC : .

CC : .

TC : .

CUM : DC : \$516,881CC : \$0TC : \$516,881

DAILY DETAILS MIRU SCHLUMBERGER frac equipment, tested lines to 7000 psi. Held safety meeting with all personnel. Quality control on gel & breaker systems with on-site lab was verified. Frac'd Mesaverde Interval # 1, 7929-7940, 7904-7925, 7864-7890, 7795-7801, 7774-7783 1 spf, 78 holes, with 77500# 20/40 Ottawa sand. Pmpd frac at an average rate of 32.8 bpm, using 300.1 mscf of N2 and 649.8 bbls of fluid. Average surface treating pressure was 3617 psi with sands stair stepping from 2 ppg to 6 ppg.

5518 gal Pad YF120ST/N2 gel.

2878 gal YF120ST/N2 pmpd @ 2 ppg sand.

2854 gal YF120ST/N2 pmpd @ 3 ppg sand.

2834 gal YF120ST/N2 pmpd @ 4 ppg sand.

2831 gal YF120ST/N2 pmpd @ 5 ppg sand

2896 gal YF120ST/N2 pmpd @ 6 ppg sand.

7482 gal WF110 slick water flush.

Total frac fluid pmpd 733.1 bbls. N2 was cut during flush.

Ru wire line, rih and set 8K frac plug @ 7740'. RIH and perforate Stage #2 @ 7699-7706, 7649-7667, 7620-7624, 7590-7618 1 spf 61 holes using 3-1/8" csg guns, 120 deg phasing. Frac'd interval #2 w/ 80000# 20/40 Ottawa sand. Pmpd frac at an avg rate of 38.7 bpm, using 291.3 mscf of N2 and 596.6 bbls of fluid. Avg surface treating pressure was 4011 psi w/ sands stair stepping from 2 ppg to 6 ppg. Well screened out 25 bbls from being flushed there was 4600# of prop left in casing. Turned over to pumper to flow well overnight on 18/64 choke.

3488 gal Pad YF120ST/N2 gel.

2819 gal YF120ST/N2 pmpd @ 2 ppg sand.

2814 gal YF120ST/N2 pmpd @ 3 ppg sand.

2812 gal YF120ST/N2 pmpd @ 4 ppg sand.

2809 gal YF120ST/N2 pmpd @ 5 ppg sand.

4116 gal YF120ST/N2 pmpd @ 6 ppg sand.

6202 gal WF110 slick water flush.

Total frac fluid pmpd 683.5 bbs. N2 was cut during flush.

Shut down operations for the night.

RECEIVED
MAY 12 2004
DIV. OF OIL, GAS & MINING



WELL CHRONOLOGY REPORT

WELL NAME : HCU 11-27F
DISTRICT : ONSHORE WESTFIELD : NATURAL BUTTES 630

Event No: 1

LOCATION : 1599 FSL 1899 FWL SEC 27 T 10S R 20ECOUNTY & STATE : UINTAH

UT

CONTRACTOR : .

WI % : 100.00000 AFE # : 401067API # : 43-047-35130PLAN DEPTH 8,000 SPUD DATE : .DHC : \$392,500CWC : \$471,500AFE TOTAL : \$864,000FORMATION : WASATCH/MESAVERDEREPORT DATE: 05/12/04MD : 8,047TVD : 8,043DAYS : 15

MW : .

VISC : .

DAILY : DC : .

CC : .

TC : .

CUM : DC : \$516,881CC : \$0TC : \$516,881

DAILY DETAILS RIH and set 8k frac plug @ 7560', perforate Stage # 3 @ 7531-7534, 7517-7530, 7483-7490 2spf, 49 holes, 120 Deg phasing, using 3-1/8" csg guns. Frac'd stage #3 w/60771 # 20/40 Ottawa sand. Pmpd frac at an avg rate of 31.8 bpm, using 209 mscf of N2 and 502 bbls of fluid. Avg surface treating pressure was 3926 psi w/ sands stair stepping from 2 ppg to 6 ppg.

2790 gal Pad YF115ST/N2 gel.

2131 gal YF115ST/N2 pmpd @ 2 ppg sand.

2110 gal YF115ST/N2 pmpd @ 3 ppg sand.

2106 gal YF115ST/N2 pmpd @ 4 ppg sand.

2107 gal YF115ST/N2 pmpd @ 5 ppg sand.

2627 gal YF115ST/N2 pmpd @ 6 ppg sand.

7212 gal WF110 pmpd slick water flush.

Total frac fluid pmpd 567.2 bbs N2 was cut during flush.

RIH and set 5k frac plug @ 7200', perforate Stage #4 @ 7110-7117, 6 spf 43 holes, 120 Deg phasing, using 3-1/8" guns. Frac'd stage #4 w/ 52413# 20/40 Ottawa sand. Pmpd frac at an avg rate of 27.5 bpm, using 166.1 mscf of N2 and 458 bbls of fluid. Avg surface treating pressure was 3414 psi w/ sands stair stepping from 2 ppg to 6 ppg.

2790 gal Pad YF115ST/N2 gel.

1423 gal YF115ST/N2 pmpd @ 2 ppg sand.

2110 gal YF115ST/N2 pmpd @ 3 ppg sand.

2106 gal YF115ST/N2 pmpd @ 4 ppg sand.

2105 gal YF115ST/N2 pmpd @ 5 ppg sand.

1867 gal YF115ST/N2 pmpd @ 6 ppg sand.

6834 gal WF110 pmpd slick water flush

Total frac fluid pmpd 514.3 bbs N2 was cut during flush.

RIH and set 5k frac plug @ 7010', perforate stage #5 @ 6908-6916, 4 spf, 6826-6830, 6 spf 58 holes, 120 Deg phasing, using 3-1/8" guns. Frac'd stage #5 w/ 40021# 20/40 Ottawa sand. Pmpd frac at an avg rate of 27.2 bpm, using 132.8 mscf of N2 and 401.5 bbls of fluid. Avg surface treating pressure was 3525 psi w/ sands stair stepping from 2 ppg to 6 ppg.

2788 gal Pad YF115ST/N2 gel.

1426 gal YF115ST/N2 pmpd @ 2 ppg sand.

1411 gal YF115ST/N2 pmpd @ 3 ppg sand.

1408 gal YF115ST/N2 pmpd @ 4 ppg sand.

1408 gal YF115ST/N2 pmpd @ 5 ppg sand.

1867 gal YF115ST/N2 pmpd @ 6 ppg sand.

6558 gal WF110 pmpd gel water flush.

Total frac fluid pmpd 444.5 bbs N2 was cut during flush.

RIH and set 5k frac plug @ 6340 perforate Stage #6 @ 6265-6274, 6062-6078, 1 spf 27 holes, 120 Deg phasing, using 3-1/8" guns. Frac'd stage #6 w/ 52434# 20/40 Ottawa sand. Pmpd frac at an avg rate of 27.7 bpm, using 149.8 mscf of N2 and 434.6 bbls of fluid. Avg surface treating pressure was 3591 psi w/ sands stair stepping from 2 ppg to 6 ppg.

2792 gal Pad YF115ST/N2 gel.

1425 gal YF115ST/N2 pmpd @ 2 ppg sand.

2112 gal YF115ST/N2 pmpd @ 3 ppg sand.

2107 gal YF115ST/N2 pmpd @ 4 ppg sand.

2109 gal YF115ST/N2 pmpd @ 5 ppg sand.

1876 gal YF115ST/N2 pmpd @ 6 ppg sand.

5833 gal WF110 pmpd slick water flush

Total frac fluid pmpd 483.6 bbs N2 was cut during flush.

RECEIVED
MAY 12 2004

DIV. OF OIL, GAS & MINING

RIH and set 5k frac plug @ 5975', perforate Stage #7 @ 5880-6890, 6 spf 61 holes, 120 Deg phasing, using 3-1/8" guns. Frac'd stage #7 w/ 32785# 20/40 Ottawa sand. Pmpd frac at an avg rate of 27.7 bpm, using 150.2 mscf of N2 and



WELL CHRONOLOGY REPORT

WELL NAME : HCU 11-27F

Event No: 1

DISTRICT : ONSHORE WESTFIELD : NATURAL BUTTES 630LOCATION : 1599 FSL 1899 FWL SEC 27 T 10S R 20ECOUNTY & STATE : UINTAH

UT

CONTRACTOR : .

WI % : 100.00000 AFE # : 401067API # : 43-047-35130PLAN DEPTH 8,000 SPUD DATE : .DHC : \$392,500CWC : \$471,500AFE TOTAL : \$864,000FORMATION : WASATCH/MESAVERDE

313 bbls of fluid. Avg surface treating pressure was 3138 psi w/ sands stair stepping from 2 ppg to 6 ppg.

2792 gal Pad YF115ST/N2 gel.

727 gal YF115ST/N2 pmpd @ 2 ppg sand.

1409 gal YF115ST/N2 pmpd @ 3 ppg sand.

1409 gal YF115ST/N2 pmpd @ 4 ppg sand.

1409 gal YF115ST/N2 pmpd @ 5 ppg sand.

1225 gal YF115ST/N2 pmpd @ 6 ppg sand.

4171 gal WF110/N2 pmpd slick water flush

Total frac fluid pmpd 331.7 bbs N2 was pmpd during flush.

Rigged down Schlumberger. Opened well on size 12 choke.

RECEIVED**MAY 12 2004**

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

013

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		8. Well Name and No. HCU 11-27F
2. Name of Operator DOMINION EXPL. & PROD., INC.		9. API Well No. 43-047-35130
3a. Address 14000 QUAIL SPRINGS PARKWAY, SUITE 600 OKLAHOMA CITY, OK 73134		10. Field and Pool, or Exploratory NATURAL BUTTES
3b. Phone No. (include area code) Ph: 405.749.5263 Fx: 405.749.6690		11. County or Parish, and State UINTAH COUNTY, UT
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 27 T10S R20E NESW 1599FSL 1899FWL		

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Drilling Operations
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomplate in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

First sales 5/20/04.

14. I hereby certify that the foregoing is true and correct.
**Electronic Submission #31126 verified by the BLM Well Information System
For DOMINION EXPL. & PROD., INC., sent to the Vernal**

Name (Printed/Typed) CARLA CHRISTIAN	Title AUTHORIZED REPRESENTATIVE
Signature <i>Carla Christian</i> (Electronic Submission)	Date 05/25/2004

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****

RECEIVED

MAY 28 2004

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137

Expires: November 30, 2000

Lease Serial No.

014

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

U-29784

1a. Type of Well Oil Well Gas Well Dry Other
 b. Type of Completion: New Well Work Over Deepen Diff. Resrv.
 Other _____

CONFIDENTIAL

2. Name of Operator
Dominion Exploration & Production, Inc.
 3. Address
14000 Quail Springs Parkway - Ste. 600 - Okla. City, OK 73134
 3a. Phone No. (include area code)
405-749-1300
 9. API Well No.
43-047-35130

4. Location of Well (Report location clearly and in accordance with Federal requirements)
 At surface _____
 At top prod. interval reported below
1599' FSL & 1899' FWL
 At total depth _____
 10. Field and Pool, or Exploratory
Natural Buttes
 11. Sec., T., R., M., or Block and Survey or Area
27-10S-20E
 12. County or Parish
Uintah
 13. State
UT

RECEIVED
JUL 22 2004
DIV. OF OIL, GAS & MINING

14. Date Spudded
4/03/2004
 15. Date T.D. Reached
4/13/2004
 16. Date Completed
 D&A Ready to prod. 5/20/2004
 17. Elevations (DF, RKB, RT, GL)*
GL 5173'
 18. Total Depth: MD 8046' TVD
 19. Plug Back T.D.: MD 7995' TVD
 20. Depth Bridge Plug Set: MD TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
 Dual/Micro Laterolog, Comp. Z-Densilog, Comp. Neutron
 Gamma Ray/Caliper Log, Cement Bond Log
 22. Was well cored? No Yes (Submit analysis)
 Was DST run? No Yes (Submit report)
 Directional Survey? No Yes (Submit copy)

23. Casing and Liner Record (Report all string set in well)

Hole Size	Size/Grade	Wt. (#/ft)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sks & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
17 1/4"	13 3/8"	48#	Surface	523'		460 Sx		Surface	
12 1/4"	8 5/8"	32#	Surface	2,200'		755 Sx		Surface	
7 7/8"	5 1/2"	17#	Surface	8,014'		875 Sx		Est. TOC 3080'	

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2 3/8"	7723'							

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Mesaverde	7774	7940	(7774-83, 7795-01, 7864-90, 7904-25, 7929-40)		78	Open
B) Mesaverde	7590	7706	7590-18, 7620-24, 7649-67, 7699-06		61	Open
C) Mesaverde	7483	7534	7483-90, 7517-3, 7531-34		49	Open
D) Uteland Buttes	7110	7117	7110-17		43	Open
E) Uteland Buttes	6826	6916	6826-30, 6908-16		58	Open
F) Chapita Wells	6062	6274	6062-78, 6265-74		27	Open
G) Chapita Wells	5880	5890	5880-90		61	Open

26. Perforation Record

Depth Interval	Amount and Type of Material
7774' - 7940'	Frac w/77,500# 20/40 Ottawa Sand, w/300.1 Mscf of N2 and 649.8 bbls YF 120ST.
7590' - 7706'	Frac w/80,000# 20/40 Ottawa Sand, w/291.3 Mscf of N2 and 596.6 bbls YF 120ST.
7483' - 7534'	Frac w/60,771# 20/40 Ottawa Sand, w/209 Mscf of N2 and 502 bbls YF 115ST.
7110' - 7117'	Frac w/52,413# 20/40 Ottawa Sand, w/166.1 Mscf of N2 and 458 bbls YF 115ST.
6826' - 6916'	Frac w/40,021# 20/40 Ottawa Sand, w/132.8 Mscf of N2 and 401.5 bbls YF 115ST.
6062' - 6274'	Frac w/52,434# 20/40 Ottawa Sand, w/149.8 Mscf of N2 and 434.6 bbls YF 115ST.
5880' - 5890'	Frac w/32,785# 20/40 Ottawa Sand, w/150.2 Mscf of N2 and 313 bbls YF 115ST.

27. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
05/20/2004	7/8/2004	24	→	2	611	44			Flowing

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						Producing

CONFIDENTIAL PERIOD EXPIRED ON 6-20-05

28b Production - Interval C									
Date First Produced	Test Date	Hours Tested	Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Fwng. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
			→						

28c. Production - Interval D									
Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Fwng. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
			→						

29. Disposition of Gas (Sold, used for fuel, vented, etc.)

Sold

30. Summary of Porous Zones (Include Aquifers):
 Show all important zones of porosity and contents thereof. Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Description, Contents, etc.	Name	Top
					Meas. Depth
				Wasatch Tongue	3810'
				Uteland Limestone	4151'
				Wasatach	4293'
				Chapita Wells	5172'
				Uteland Buttes	6334'
				Mesaverde	7134'

32. Additional remarks (include plugging procedure)

33. Circle enclosed attachments:

- 1. Electrical/Mechanical Logs (1 full set req'd)
- 2. Geologic Report
- 3. DST Report
- 4. Directional Survey
- 5. Sundry Notice for plugging and cement verification
- 6. Core Analysis
- 7. Other:

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) Carla Christian Title Regulatory Specialist
 Signature Carla Christian Date July 20, 2004

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING
1. DJJ
2. CDW

X - Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

7/1/2007

FROM: (Old Operator): N1095-Dominion Exploration & Production, Inc 14000 Quail Springs Parkway, Suite 600 Oklahoma City, OK 73134 Phone: 1 (405) 749-1300	TO: (New Operator): N2615-XTO Energy Inc 810 Houston St Fort Worth, TX 76102 Phone: 1 (817) 870-2800
--	--

CA No.		Unit:		HILL CREEK				
WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
SEE ATTACHED LIST								

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 8/6/2007
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 8/6/2007
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 8/6/2007
- a. Is the new operator registered in the State of Utah: _____ Business Number: 5655506-0143
- b. If **NO**, the operator was contacted on: _____
- a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- b. Inspections of LA PA state/fee well sites complete on: n/a
- c. Reports current for Production/Disposition & Sundries on: ok
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM BIA
- Federal and Indian Units:**
 The BLM or BIA has approved the successor of unit operator for wells listed on: _____
- Federal and Indian Communization Agreements ("CA"):**
 The BLM or BIA has approved the operator for all wells listed within a CA on: _____
- Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: _____

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 9/27/2007
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 9/27/2007
- Bond information entered in RBDMS on: 9/27/2007
- Fee/State wells attached to bond in RBDMS on: 9/27/2007
- Injection Projects to new operator in RBDMS on: 9/27/2007
- Receipt of Acceptance of Drilling Procedures for APD/New on: 9/27/2007

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: UTB000138
 - Indian well(s) covered by Bond Number: n/a
 - a. (R649-3-1) The **NEW** operator of any state/fee well(s) listed covered by Bond Number 104312762
 - b. The **FORMER** operator has requested a release of liability from their bond on: 1/23/2008
- The Division sent response by letter on: _____

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **NEW** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: _____

COMMENTS:

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

		5. LEASE DESIGNATION AND SERIAL NUMBER:
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		8. WELL NAME and NUMBER: SEE ATTACHED
2. NAME OF OPERATOR: XTO Energy Inc. <i>N2615</i>		9. API NUMBER: SEE ATTACHED
3. ADDRESS OF OPERATOR: 810 Houston Street CITY Fort Worth STATE TX ZIP 76102		10. FIELD AND POOL, OR WILDCAT: Natural Buttes
4. LOCATION OF WELL FOOTAGES AT SURFACE: SEE ATTACHED		COUNTY: Uintah
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
Effective July 1, 2007, XTO Energy Inc. has purchased the wells listed on the attachment from:

Dominion Exploration & Production, Inc. *N1095*
14000 Quail Springs Parkway, Suite 600
Oklahoma City, OK 73134

James D. Abercrombie (405) 749-1300
James D. Abercrombie
Sr. Vice President, General Manager - Western Business Unit

Please be advised that XTO Energy Inc. is considered to be the operator on the attached list and is responsible under the terms and conditions of the lease for the operations conducted upon the lease lands. Bond coverage is provided by Nationwide BLM Bond #104312750 and Department of Natural Resources Bond #104312762.

NAME (PLEASE PRINT) <u>Edwin S. Ryan, Jr.</u>	TITLE <u>Sr. Vice President - Land Administration</u>
SIGNATURE <i>Edwin S. Ryan, Jr.</i>	DATE <u>7/31/2007</u>

(This space for State use only)

APPROVED 9127107
Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

(See Instructions on Reverse Side)

RECEIVED
AUG 06 2007
DIV. OF OIL, GAS & MINING

(5/2000)

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

api	well_name	qtr	qtr	sec	twp	rng	lease_num	entity	Lease	well	stat
4304731522	FEDERAL 1-29	SWNW	29	100S	200E	U-28203	12829	Federal	GW	P	
4304731601	HILLCREEK FED 1-30	NWSW	30	100S	200E	U-30693	12829	Federal	GW	P	
4304731675	HILL CREEK FED 1-27	SEW	27	100S	200E	U-29784	12829	Federal	GW	P	
4304733671	HCU 1-28F	NENE	28	100S	200E	14-20-H62-4783	12829	Indian	GW	S	
4304733672	HCU 1-29F	NENE	29	100S	200E	U-28203	12829	Federal	GW	P	
4304733673	HCU 2-30F	NWNE	30	100S	200E	UTU-29784	12829	Federal	GW	P	
4304733688	HCU 3-28F	NENW	28	100S	200E	U-28203	12829	Federal	GW	P	
4304733689	HCU 3-29F	NENW	29	100S	200E	U-28203	12829	Federal	GW	P	
4304733713	HCU 3-30F	NWNW	30	100S	200E	UTU-30693	12829	Federal	GW	P	
4304733835	HCU 5-30F	SWNW	30	100S	200E	U-30693	12829	Federal	GW	P	
4304733836	HCU 6-30F	SEW	30	100S	200E	U-30693	12829	Federal	GW	P	
4304733964	HCU 8-30F	SENE	30	100S	200E	UTU-29784	12829	Federal	GW	P	
4304733965	HCU 11-30F	NESW	30	100S	200E	U-30693	12829	Federal	GW	P	
4304733966	HCU 13-30F	SWSW	30	100S	200E	U-30693	12829	Federal	GW	P	
4304734045	HCU 5-28F	SWNW	28	100S	200E	U-28203	12829	Federal	GW	P	
4304734046	HCU 7-29F	SWNE	29	100S	200E	U-28203	12829	Federal	GW	P	
4304734223	HCU 9-29F	NESE	29	100S	200E	U-28203	12829	Federal	GW	P	
4304734298	HCU 3-31F	NWNW	31	100S	200E	UTU-30693	12829	Federal	GW	P	
4304734299	HCU 5-31F	SWNW	31	100S	200E	UTU-30693	12829	Federal	GW	P	
4304734300	HCU 7-31F	SEW	31	100S	200E	UTU-30693	12829	Federal	GW	P	
4304734316	HCU 2-27F	NWNE	27	100S	200E	UTU-79130	12829	Federal	GW	P	
4304734351	HCU 8-27F	SENE	27	100S	200E	UTU-79130	12829	Federal	GW	P	
4304734352	HCU 11-31F	NWSW	31	100S	200E	UTU-30693	12829	Federal	GW	P	
4304734353	HCU 13-31F	SWSW	31	100S	200E	UTU-30693	12829	Federal	GW	P	
4304734853	HCU 1-33F	NENE	33	100S	200E	14-20-H62-4782	12829	Indian	GW	P	
4304734854	HCU 3-34F	NENW	34	100S	200E	U-28203	12829	Federal	GW	P	
4304734913	HCU 1-27F	NENE	27	100S	200E	U-79130	12829	Federal	GW	P	
4304734914	HCU 3-27F	NENW	27	100S	200E	U-79130	12829	Federal	GW	P	
4304734915	HCU 7-27F	SWNE	27	100S	200E	U-79130	12829	Federal	GW	S	
4304734916	HCU 10-27F	NWSE	27	100S	200E	U-79130	12829	Federal	GW	P	
4304734917	HCU 14-30F	SWSW	30	100S	200E	U-30693	12829	Federal	GW	P	
4304734918	HCU 15-30F	SWSE	30	100S	200E	U-29784	12829	Federal	GW	P	
4304734919	HCU 2-31F	NWNE	31	100S	200E	U-30693	12829	Federal	GW	P	
4304734920	HCU 6-31F	SWNW	31	100S	200E	U-30693	12829	Federal	GW	P	
4304734921	HCU 4-31F	NWNW	31	100S	200E	U-30693	12829	Federal	GW	P	
4304735130	HCU 11-27F	NESW	27	100S	200E	U-29784	12829	Federal	GW	P	
4304735131	HCU 2-29F	NWNE	29	100S	200E	U-28203	12829	Federal	GW	P	
4304735132	HCU 9-30F	NESE	30	100S	200E	U-29784	12829	Federal	GW	P	
4304735133	HCU 10-30F	NWSE	30	100S	200E	U-29784	12829	Federal	GW	P	
4304735134	HCU 1-31F	NENE	31	100S	200E	U-36903	12829	Federal	GW	P	
4304735135	HCU 12-31F	NWSW	31	100S	200E	U-30693	12829	Federal	GW	P	
4304735137	HCU 2-33F	NENE	33	100S	200E	U-28203	12829	Federal	GW	P	
4304735139	HCU 5-34F	NENW	34	100S	200E	U-28203	12829	Federal	GW	P	
4304735154	HCU 13-27F	NESW	27	100S	200E	U-29784	12829	Federal	GW	P	
4304735230	HCU 8-33F	SENE	33	100S	200E	14-20-H62-4782	12829	Indian	GW	P	
4304735307	HCU 6-29F	SEW	29	100S	200E	U-28203	12829	Federal	GW	P	
4304735470	HCU 11-29F	NESW	29	100S	200E	U-28203	12829	Federal	GW	P	
4304735471	HCU 10-29F	NWSE	29	100S	200E	U-28203	12829	Federal	GW	P	

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

api	well name	qtr	qtr	sec	tpw	rng	lease_num	entity	Lease	well	stat
4304735507	HCU 12-29FA	NESW	29	100S	200E	U-28203	12829	Federal	GW	DRL	
4304735724	HCU 16-27F	SESE	27	100S	200E	U-79130	12829	Federal	GW	P	
4304735725	HCU 9-27F	NESE	27	100S	200E	U-79130	12829	Federal	GW	P	
4304735726	HCU 15-27F	SWSE	27	100S	200E	U-79130	12829	Federal	GW	P	
4304735727	HCU 9-34F	NESE	34	100S	200E	U-79130	12829	Federal	GW	P	
4304735728	HCU 7-34F	SWNE	34	100S	200E	U-79130	12829	Federal	GW	P	
4304735832	HCU 9-33F	NESE	33	100S	200E	U-28203	12829	Federal	GW	P	
4304735833	HCU 16-33F	SESE	33	100S	200E	U-28203	12829	Federal	GW	P	
4304735835	HCU 11-34F	NESW	34	100S	200E	U-28203	12829	Federal	GW	P	
4304735836	HCU 12-34F	NWSW	34	100S	200E	U-28203	12829	Federal	GW	P	
4304735837	HCU 13-34F	SWSW	34	100S	200E	U-28203	12829	Federal	GW	P	
4304735838	HCU 15-34F	SWSE	34	100S	200E	U-79130	12829	Federal	GW	P	
4304735875	HCU 14-34F	SWSE	34	100S	200E	U-79130	12829	Federal	GW	P	
4304735934	HCU 8-31F	SENE	31	100S	200E	U-30693	12829	Federal	GW	P	
4304735935	HCU 10-31F	NWSE	31	100S	200E	U-30693	12829	Federal	GW	P	
4304735936	HCU 9-31F	NWSE	31	100S	200E	U-30693	12829	Federal	GW	P	
4304735939	HCU 16-28F	SESE	28	100S	200E	U-28203	12829	Federal	GW	P	
4304735940	HCU 6-34F	SENE	34	100S	200E	U-28203	12829	Federal	GW	P	
4304735996	HCU 16-34F	SESE	34	100S	200E	U-79130	12829	Federal	GW	P	
4304736046	HCU 14-31F	SWSW	31	100S	200E	U-30693	12829	Federal	GW	P	
4304736251	HCU 16-30F	NESE	30	100S	200E	U-29784	12829	Federal	GW	P	
4304736319	HCU 10-28F	NWSE	28	100S	200E	U-28203	12829	Federal	GW	P	
4304736320	HCU 13-28F	SWSW	28	100S	200E	U-28203	12829	Federal	GW	P	
4304736321	HCU 14-28F	SESW	28	100S	200E	U-28203	12829	Federal	GW	P	
4304736437	HCU 5-27F	SWNW	27	100S	200E	U-29784	12829	Federal	GW	DRL	
4304736438	HCU 4-27F	SWNW	27	100S	200E	U-29784	12829	Federal	GW	DRL	
4304736439	HCU 11-28F	NESW	28	100S	200E	U-28203	12829	Federal	GW	P	
4304736440	HCU 5-30F2	SWNW	30	100S	200E	U-30693	12829	Federal	GW	DRL	
4304736601	HCU 5-33F	SWNW	33	100S	200E	U-28203	12829	Federal	GW	P	
4304736602	HCU 12-33F	NWSW	33	100S	200E	U-28203	12829	Federal	GW	P	
4304736603	HCU 6-28F	SENE	28	100S	200E	U-28203	12829	Federal	GW	S	
4304736604	HCU 12-28F	NWSW	28	100S	200E	U-28203	12829	Federal	GW	P	
4304736685	HCU 13-33F	SWSW	33	100S	200E	U-28203	12829	Federal	GW	P	
4304736846	HCU 9-28F	NESE	28	100S	200E	14-20-H62-4781	12829	Indian	GW	P	
4304736847	HCU 8-28F	SENE	28	100S	200E	14-20-H62-4783	12829	Indian	GW	P	
4304736848	HCU 7-28F	SWNE	28	100S	200E	U-28203	12829	Federal	GW	P	
4304736849	HCU 1-34F	NENE	34	100S	200E	U-79130	12829	Federal	GW	P	
4304736852	HCU 14-27F	NESW	27	100S	200E	U-29784	12829	Federal	GW	DRL	
4304736853	HCU 16-29F	SESE	29	100S	200E	U-28203	12829	Federal	GW	P	
4304737060	HCU 4-33F	NWNW	33	100S	200E	U-28203	12829	Federal	GW	P	
4304737202	HCU 6-33F	SENE	33	100S	200E	U-28203	12829	Federal	GW	P	
4304737203	HCU 3-33F	NWNE	33	100S	200E	U-28203	12829	Federal	OW	P	
4304737204	HCU 15-28F	NWNE	33	100S	200E	14-20-H62-4781	12829	Indian	OW	P	
4304737284	HCU 7-30F	SENE	30	100S	200E	U-29784	99999	Federal	OW	DRL	
4304737340	HCU 5-29F	SWNW	29	100S	200E	U-28203	12829	Federal	GW	P	
4304737360	HCU 11-33F	NWSW	33	100S	200E	U-28203	12829	Federal	GW	P	
4304737424	HCU 12-27F	NESW	27	100S	200E	U-29784	12829	Federal	OW	DRL	
4304737425	HCU 14-29F	SWSW	29	100S	200E	U-28203	12829	Federal	GW	P	

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

api	well_name	qtr_qtr	sec	twp	rng	lease_num	entity	Lease	well	stat
4304737426	HCU 13-29F	SWSW	29	100S	200E	U-28203	12829	Federal	GW	P
4304737427	HCU 8-29F	NESE	29	100S	200E	U-28203	12829	Federal	GW	P
4304737445	HCU 8-34F	SENE	34	100S	200E	U-79130	12829	Federal	OW	S
4304737446	HCU 2-34F	NWNE	34	100S	200E	U-79130	12829	Federal	OW	DRL
4304737447	HCU 7-33F	SENE	33	100S	200E	U-28203	12829	Federal	OW	DRL
4304737570	HCU 10-33F	NWSE	33	100S	200E	14-20-H62-4782	12829	Indian	GW	P
4304737749	HCU 4-28F	NENW	28	100S	200E	U-28203	99999	Federal	GW	DRL
4304737750	HCU 14-33F	SWSE	33	100S	200E	U-028203	12829	Federal	GW	DRL
4304731560	HILL CREEK ST 1-32	SENW	32	100S	200E	ML-22313	12829	State	GW	P
4304734852	HCU 4-32F	NWNW	32	100S	200E	ML-22313-2	12829	State	GW	P
4304735136	HCU 5-32F	SWNW	32	100S	200E	ML-22313-2	12829	State	GW	P
4304735870	HCU 13-32F	NESE	31	100S	200E	ML-22313-2		State	GW	LA
4304735871	HCU 12-32F	NESE	31	100S	200E	ML-22313-2		State	GW	LA
4304735872	HCU 14-32F	SESW	32	100S	200E	ML-22313-2	12829	State	GW	P
4304735873	HCU 3-32F	NENW	32	100S	200E	ML-22313-2	12829	State	GW	DRL
4304735874	HCU 11-32F	SENW	32	100S	200E	ML-22313-2	12829	State	D	PA
4304736322	HCU 16-32F	SESE	32	100S	200E	ML-22313-2	12829	State	GW	P
4304736323	HCU 9-32F	NESE	32	100S	200E	ML-22313-2	12829	State	GW	P
4304736324	HCU 8-32F	SENE	32	100S	200E	ML-22313-2	12829	State	GW	P
4304736441	HCU 1-32F2	NENE	32	100S	200E	ML-22313-2	12829	State	GW	P
4304736684	HCU 7-32F	SENE	32	100S	200E	ML-22313-2	12829	State	GW	P



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155



IN REPLY REFER TO
3180
UT-922

Dominion Exploration & Production, Inc.
Attn: James D. Abercrombie
14000 Quail Springs Parkway, #600
Oklahoma City, OK 73134-2600

August 10, 2007

Re: Hill Creek Unit
Uintah County, Utah

Gentlemen:

On August 8, 2007, we received an indenture dated June 30, 2007, whereby Dominion Exploration & Production, Inc. resigned as Unit Operator and XTO Energy Inc. was designated as Successor Unit Operator for the Hill Creek Unit, Uintah County, Utah.

This indenture was executed by all required parties and the signatory parties have complied with Sections 5 and 6 of the unit agreement. The instrument is hereby approved effective August 15, 2007. In approving this designation, the Authorized Officer neither warrants nor certifies that the designated party has obtained all required approval that would entitle it to conduct operations under the Hill Creek Unit Agreement.

Your statewide oil and gas Bond No. UTB000138 will be used to cover all operations within the River Bend Unit.

It is requested that you notify all interested parties of the change in unit operator. Copies of the approved instruments are being distributed to the appropriate federal offices, with one copy returned herewith.

Sincerely,

/s/ Greg J. Noble

Greg J. Noble
Acting Chief, Branch of Fluid Minerals

Enclosure

RECEIVED

AUG 16 2007

DIV. OF OIL, GAS & MINING