

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

001 APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: DRILL REENTER

b. Type of Well: Oil Well Gas Well Other Single Zone Multiple Zone

2. Name of Operator
WESTPORT OIL & GAS COMPANY, L.P.

3A. Address **P.O. BOX 1148, VERNAL, UTAH 84078** 3b. Phone No. (include area code) **(435)781-7060**

4. Location of Well (Report location clearly and in accordance with any State requirements. *)
At surface **NWSE** **2075 1936 4427841Y 39.99113**
At proposed prod. Zone **1936' FSL 2075' FEL 639464X -109.36645**

14. Distance in miles and direction from nearest town or post office*
23 miles southeast of Ouray, Utah

15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) **1936'**

16. No. of Acres in lease **557.96**

17. Spacing Unit dedicated to this well **80**

18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. **refer to Topo "C"**

19. Proposed Depth **8900**

20. BLM/BIA Bond No. on file **BLM BOND # CO-1203**

21. Elevations (Show whether DF, KDB, RT, GL, etc.) **5067.1' Ungraded GL**

22. Approximate date work will start* **Upon Approval**

23. Estimated duration **To Be Determined**

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification.
- Such other site specific information and/or plans as may be required by the authorized office.

25. Signature *Debra Domenici* Name (Printed/Typed) **Debra Domenici** Date **8/18/2003**

Title **Administrative Assistant**

Approved by (Signature) *Bradley G. Hill* Name (Printed/Typed) **BRADLEY G. HILL** Date **08-28-03**

Title **ENVIRONMENTAL SCIENTIST III**

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

RECEIVED

AUG 25 2003

DIV. OF OIL, GAS & MINING



T9S, T23E, S.L.B.&M.

WESTPORT OIL AND GAS COMPANY, L.P.

Well location, SOUTHMAN CANYON #923-31J, located as shown in the NW 1/4 SE 1/4 of Section 31, T9S, R23E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

BENCH MARK 58 EAM (1965) LOCATED IN THE NE 1/4 OF SECTION 30, T9S, R23E, S.L.B.&M. TAKEN FROM THE RED WASH SE, QUADRANGLE, UTAH, UTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5132 FEET.

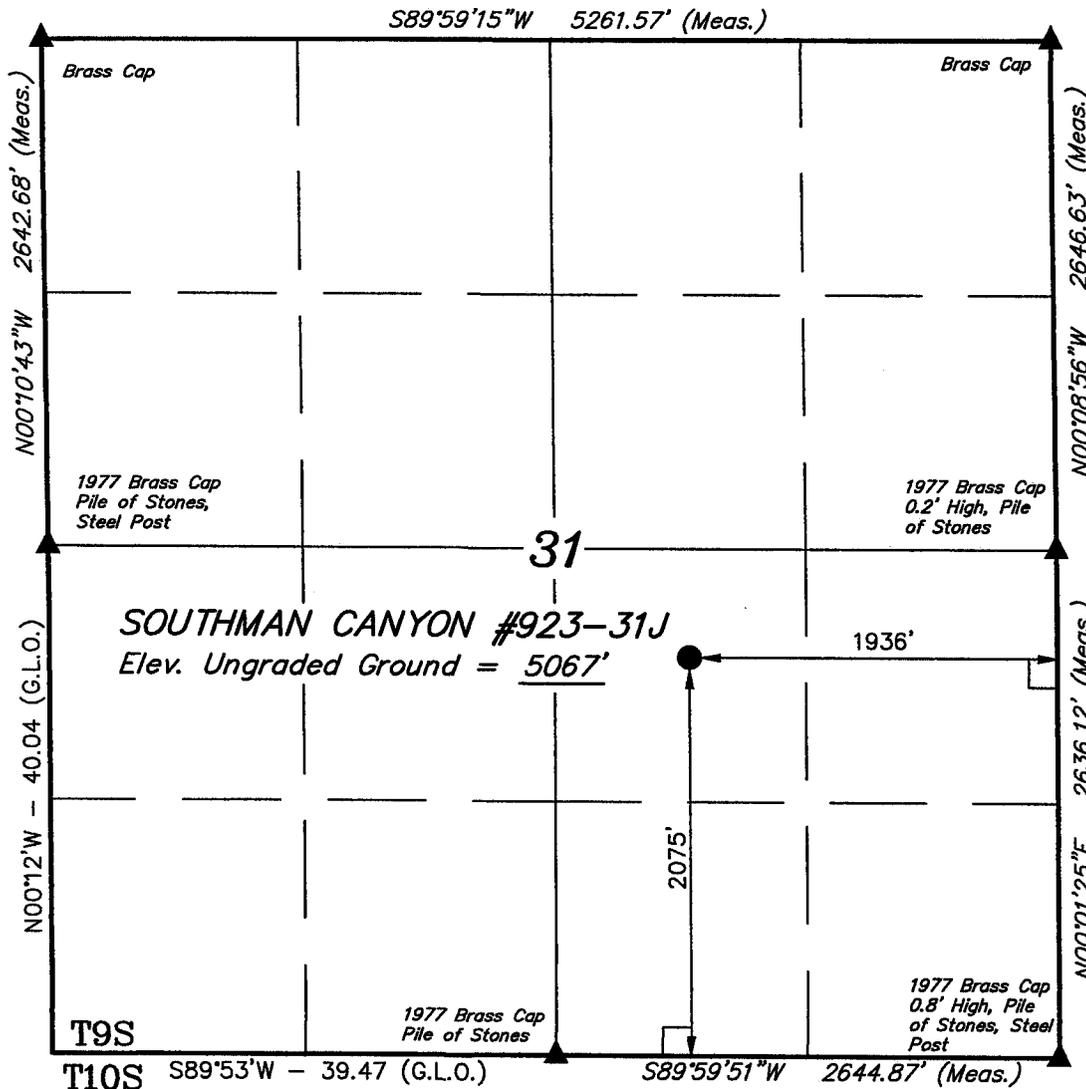

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

[Signature]
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 161319
 STATE OF UTAH

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

(AUTONOMOUS NAD 83)
 LATITUDE = 39°59'27.32" (39.990922)
 LONGITUDE = 109°22'01.40" (109.367056)

UINTAH ENGINEERING & LAND SURVEYING

85 SOUTH 200 EAST - VERNAL, UTAH 84078

(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 06-17-03	DATE DRAWN: 06-25-03
PARTY B.B. J.W. D.R.B.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE WESTPORT OIL AND GAS COMPANY, L.P.	

**SOUTHMAN CANYON #923-31J
NW/SE Sec. 31, T9S,R23E
UINTAH COUNTY, UTAH
U-33433**

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. Estimated Tops of Important Geologic Markers:

<u>Formation</u>	<u>Depth</u>
Uinta	0- Surface
Green River	1565'
Wasatch	4250'
Mesaverde	6625'
TD	8900'

2. Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
	Green River	1565'
Gas	Wasatch	4250'
Gas	Mesaverde	6625'
Water	N/A	
Other Minerals	N/A	

3. Pressure Control Equipment (Schematic Attached)

Please refer to the attached Drilling Program.

4. Proposed Casing & Cementing Program:

Please refer to the attached Drilling Program.

5. Drilling Fluids Program:

Please refer to the attached Drilling Program.

6. Evaluation Program:

Please refer to the attached Drilling Program.

7. Abnormal Conditions:

Maximum anticipated bottomhole pressure calculated at 8900' TD, approximately equals 3560 psi (calculated at 0.4 psi/foot).

Maximum anticipated surface pressure equals approximately 1602 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. **Anticipated Starting Dates:**

Drilling is planned to commence immediately upon approval of this application.

9. **Variances:**

Please refer to the attached Drilling Program.

10. **Other Information:**

Please refer to the attached Drilling Program.

SOUTHMAN CANYON #923-31J
NW/SE SEC. 31, T9S, R23E
UINTAH COUNTY, UTAH
U-33433

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. **Existing Roads:**

Directions to the proposed location are attached.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

2. **Planned Access Roads:**

The proposed new access road is approximately 0.3 Miles +/- and approximately 0.2 miles of existing road needs to be upgraded. Refer to Topo Map B.

The access road will be crowned (2 to 3%), ditched and constructed with a running surface of 18 feet and a maximum disturbed width of 30 feet. Graveling or capping the roadbed will be performed as necessary to provide a well constructed, safe road. Prior to construction or upgrading, the proposed road shall be cleared of any snow and allowed to dry completely.

Surface disturbance and vehicular traffic will be limited to the proposed location and proposed access route. Any additional area needed will be approved in advance. All construction shall be in conformance with the standards outlined in the BLM and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development. 1989.

The road surface and shoulders will be kept in a safe and usable condition and will be maintained in accordance with the original construction standards. All drainage ditches will be kept clear and free-flowing and will be maintained according to original construction standards. The access road surface will be kept free of trash during operations. All traffic will be confined to the approved disturbed surface. Road drainage crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing or shall the drainages be blocked by the road bed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Should mud holes develop, they shall be filled in and detours around them avoided. When snow is removed from the road during the winter months, the snow shall be pushed outside of the borrow ditches, and the turnouts kept clear so that snowmelt will be channeled away from the road.

3. **Location of Existing Wells Within a 1-Mile Radius:**

Please refer to Topo Map C.

4. **Location of Existing & Proposed Facilities:**

The following guidelines will apply if the well is productive.

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The requested color is Carlsbad Canyon (2.5 Y 6/2) as determined during the on-site inspection.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

Approximately 3,000' of pipeline is proposed. Refer to Topo Map D for the placement of the proposed pipeline.

5. Location and Type of Water Supply:

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec.32, T4S,R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

6. Source of Construction Materials:

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

7. Methods of Handling Waste Materials:

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge of liquids.

A plastic reinforced liner is to be used as discussed during on-site inspection. It will be a minimum of 12 mil thick and felt, with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec.35, T9S, R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E. (Request is in lieu of filing Form 3160-5, after initial production).

8. **Ancillary Facilities:**

None are anticipated.

9. **Well Site Layout:** (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

The net wire shall be no more than two inches above the ground. The barbed wire shall be three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

10. **Plans for Reclamation of the Surface:**

Producing Location:

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water (s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling, and recontouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

Dry Hole/Abandoned Location:

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations.

11. Surface Ownership:

United States of America
Bureau of Land Management
170 South 500 East
Vernal, UT 84078
(435) 789-1362

12. Other Information:

A Class III archaeological survey and a paleontological survey will be submitted when the report becomes available.

The Krugerfritz Reservoir shall be cleaned out if it is dry at the time of construction.

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance. The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

Seed Mixture:

Shadscale	4 lb/acre
Crested Wheatgrass	4 lb/acre
Wyoming Big Sage	1 lb/acre
Galleta Grass	3 lb/acre

13. Lessee's or Operators's Representative & Certification:

Debra Domenici
Sr. Administrative Assistant
Westport O&G Co.
P.O. Box 1148
Vernal, UT 84078
(435) 781-7060

Randy Bayne
Drilling Manager
Westport O&G Co.
P.O. Box 1148
Vernal, UT 84078
(435)781-7018

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Westport Oil & Gas Company is considered to be the operator of the subject well. Westport Oil & Gas Company agrees to be responsible under the terms and the conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for the lease activities is being provided by BLM Nationwide Bond #CO-1203.

I hereby certify that the proposed drill site and access route has been inspected and that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.


Debra Domenici

8/18/03
Date

WESTPORT OIL & GAS COMPANY, L.P.

SOUTHMAN CANYON #923-31J SECTION 31, T9S, R23E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 0.3 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN A EASTERLY DIRECTION APPROXIMATELY 12.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 1.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 2.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN LEFT AND PROCEED IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 3.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN RIGHT AND PROCEED IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 0.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN LEFT AND PROCEED IN A SOUTHERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 1.2 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 0.4 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN A EASTERLY DIRECTION APPROXIMATELY 0.1 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD THAT NEEDS UPGRADED TO THE NORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE EAST; FOLLOW ROAD FLAGS IN AN EASTERLY, THEN NORTHEASTERLY, THEN NORTHERLY DIRECTION APPROXIMATELY 0.3 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 53.5

WESTPORT OIL & GAS COMPANY, L.P.
SOUTHMAN CANYON #923-31J
 LOCATED IN UINTAH COUNTY, UTAH
 SECTION 31, T9S, R23E, S.L.B.&M.

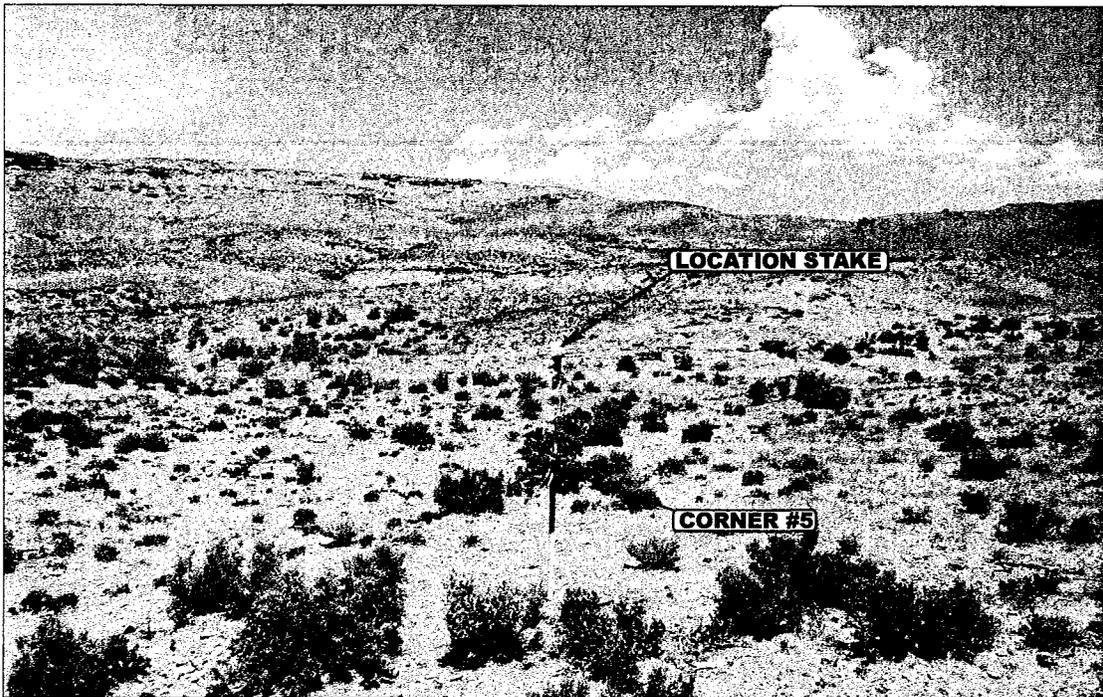


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHEASTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS


CAMERA ANGLE: NORTHEASTERLY



- Since 1964 -

U E L S Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 435-789-1017 uels@uelsinc.com

LOCATION PHOTOS			6	18	03	PHOTO
			MONTH	DAY	YEAR	
TAKEN BY: B.B.	DRAWN BY: K.G.	REVISED: 00-00-00				

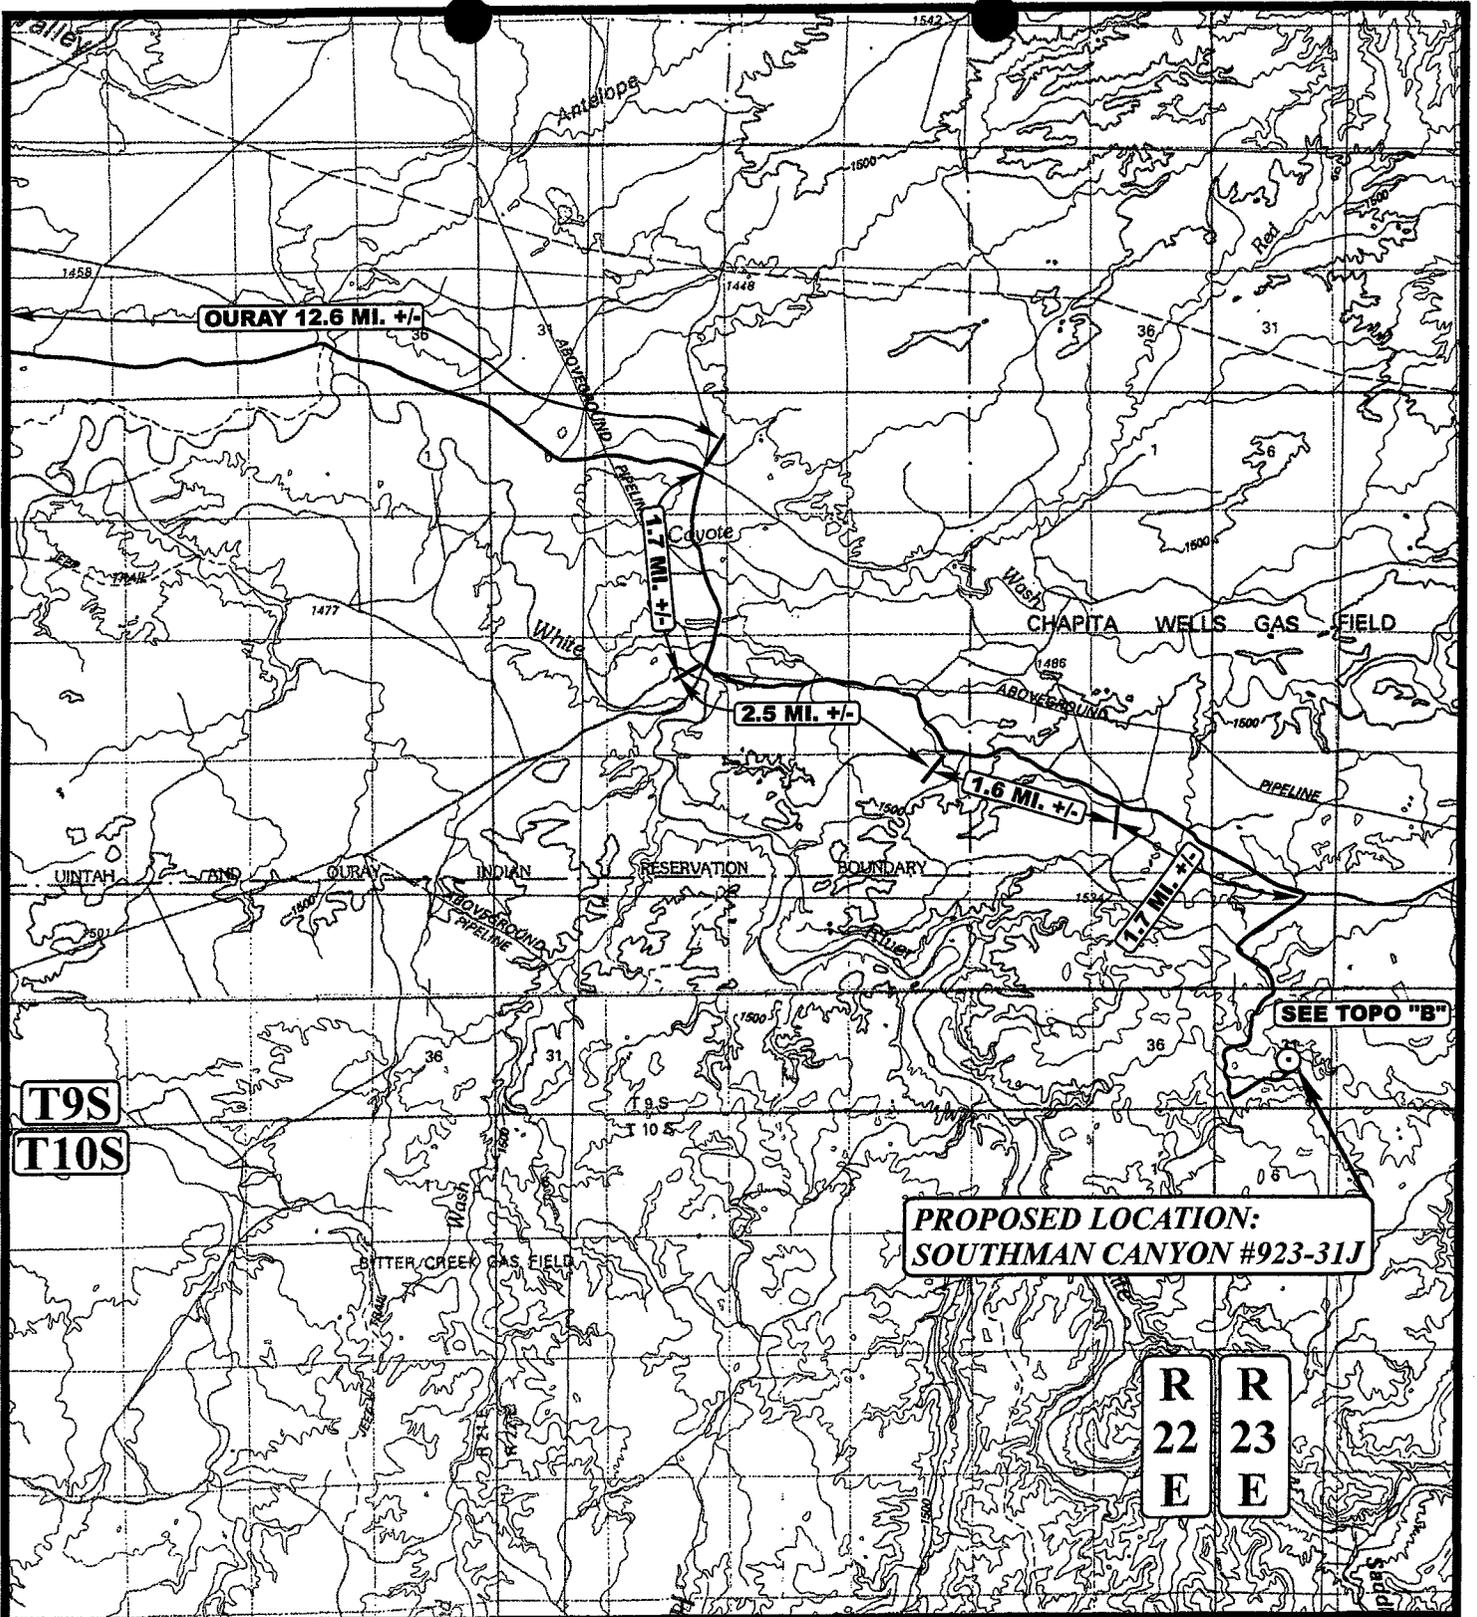

LEGEND:

⊙ PROPOSED LOCATION



WESTPORT OIL & GAS COMPANY, L.P.

SOUTHMAN CANYON #923-31J
 SECTION 31, T9S, R23E, S.L.B.&M.
 2075' FSL 1936' FEL




Utah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
 MAP

6	19	03
MONTH	DAY	YEAR

SCALE: 1:100,000 | DRAWN BY: K.G. | REVISED: 00-00-00



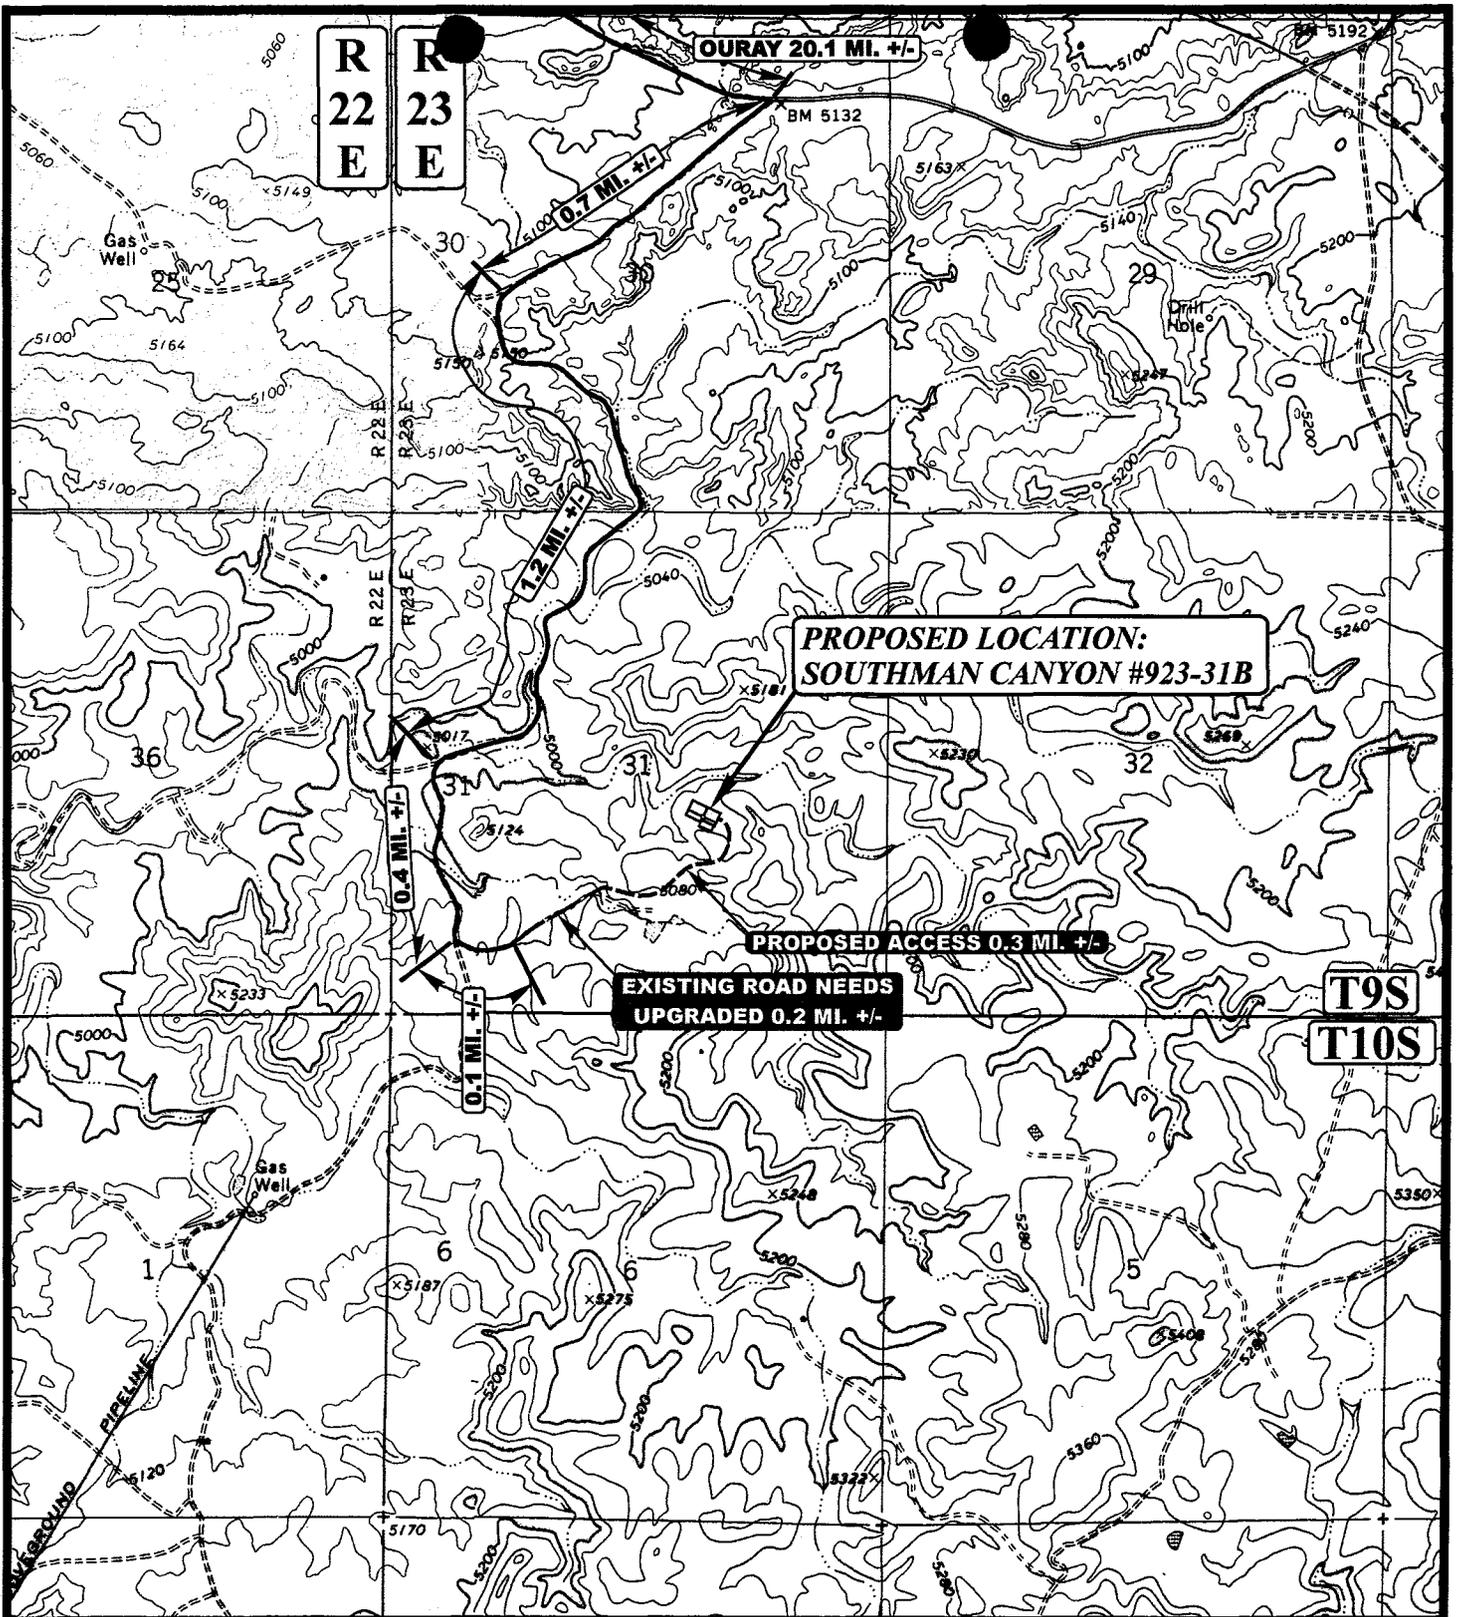

**PROPOSED LOCATION:
SOUTHMAN CANYON #923-31B**

PROPOSED ACCESS 0.3 MI. +/-

**EXISTING ROAD NEEDS
UPGRADED 0.2 MI. +/-**

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING ROAD




WESTPORT OIL & GAS COMPANY, L.P.

**SOUTHMAN CANYON #923-31J
SECTION 31, T9S, R23E, S.L.B.&M.
2075' FSL 1936' FEL**

U&L S Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC **6** **19** **03**
MAP MONTH DAY YEAR
SCALE: 1" = 2000' DRAWN BY: K.G. REVISED: 00-00-00

B
TOPO

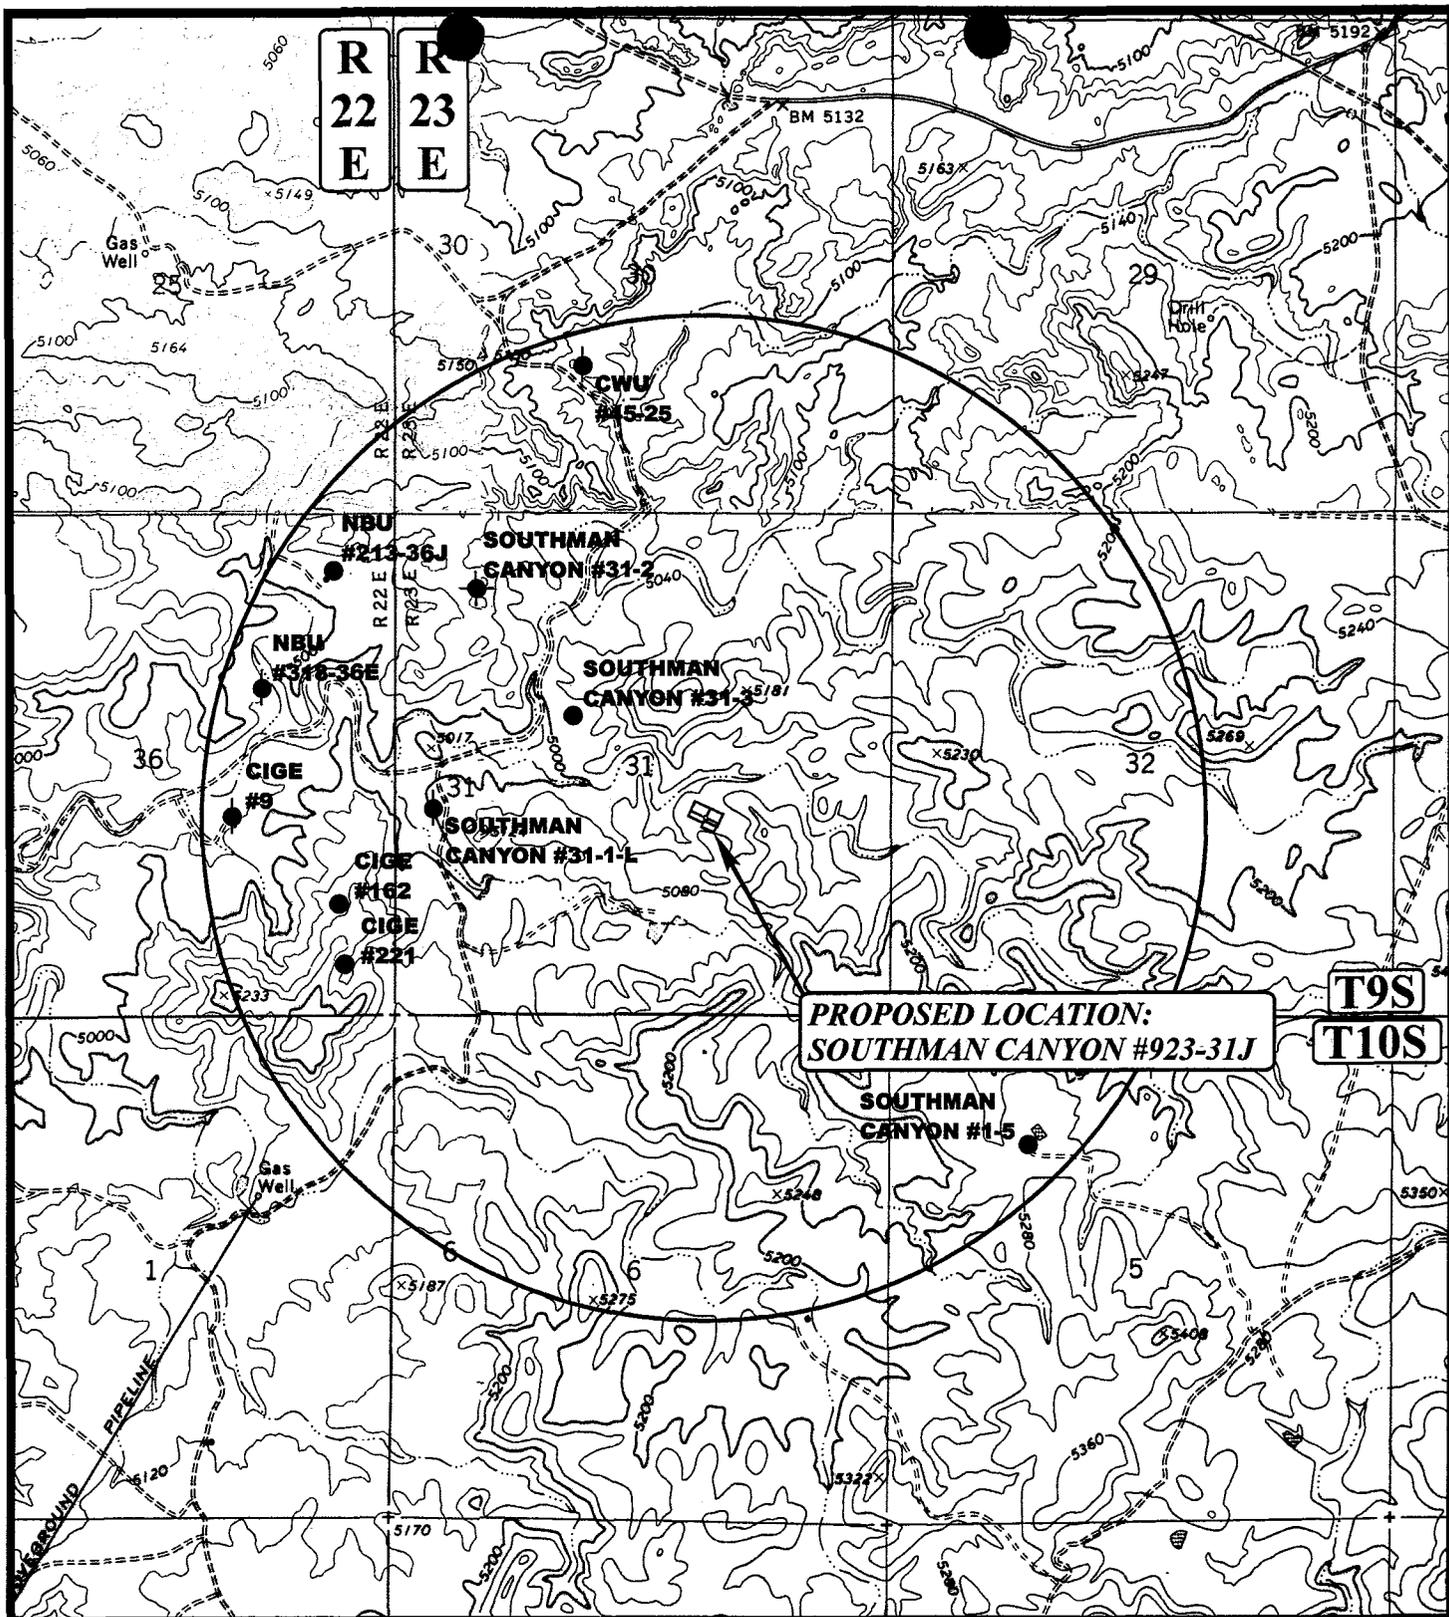

**PROPOSED LOCATION:
SOUTHMAN CANYON #923-31J**

LEGEND:

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ⊗ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED


WESTPORT OIL & GAS COMPANY, L.P.

**SOUTHMAN CANYON #923-31J
SECTION 31, T9S, R23E, S.L.B.&M.
2075' FSL 1936' FEL**

U&L S Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC MAP **6 19 03**
MONTH DAY YEAR
SCALE: 1" = 2000' DRAWN BY: K.G. REVISED: 00-00-00 **C TOPO**

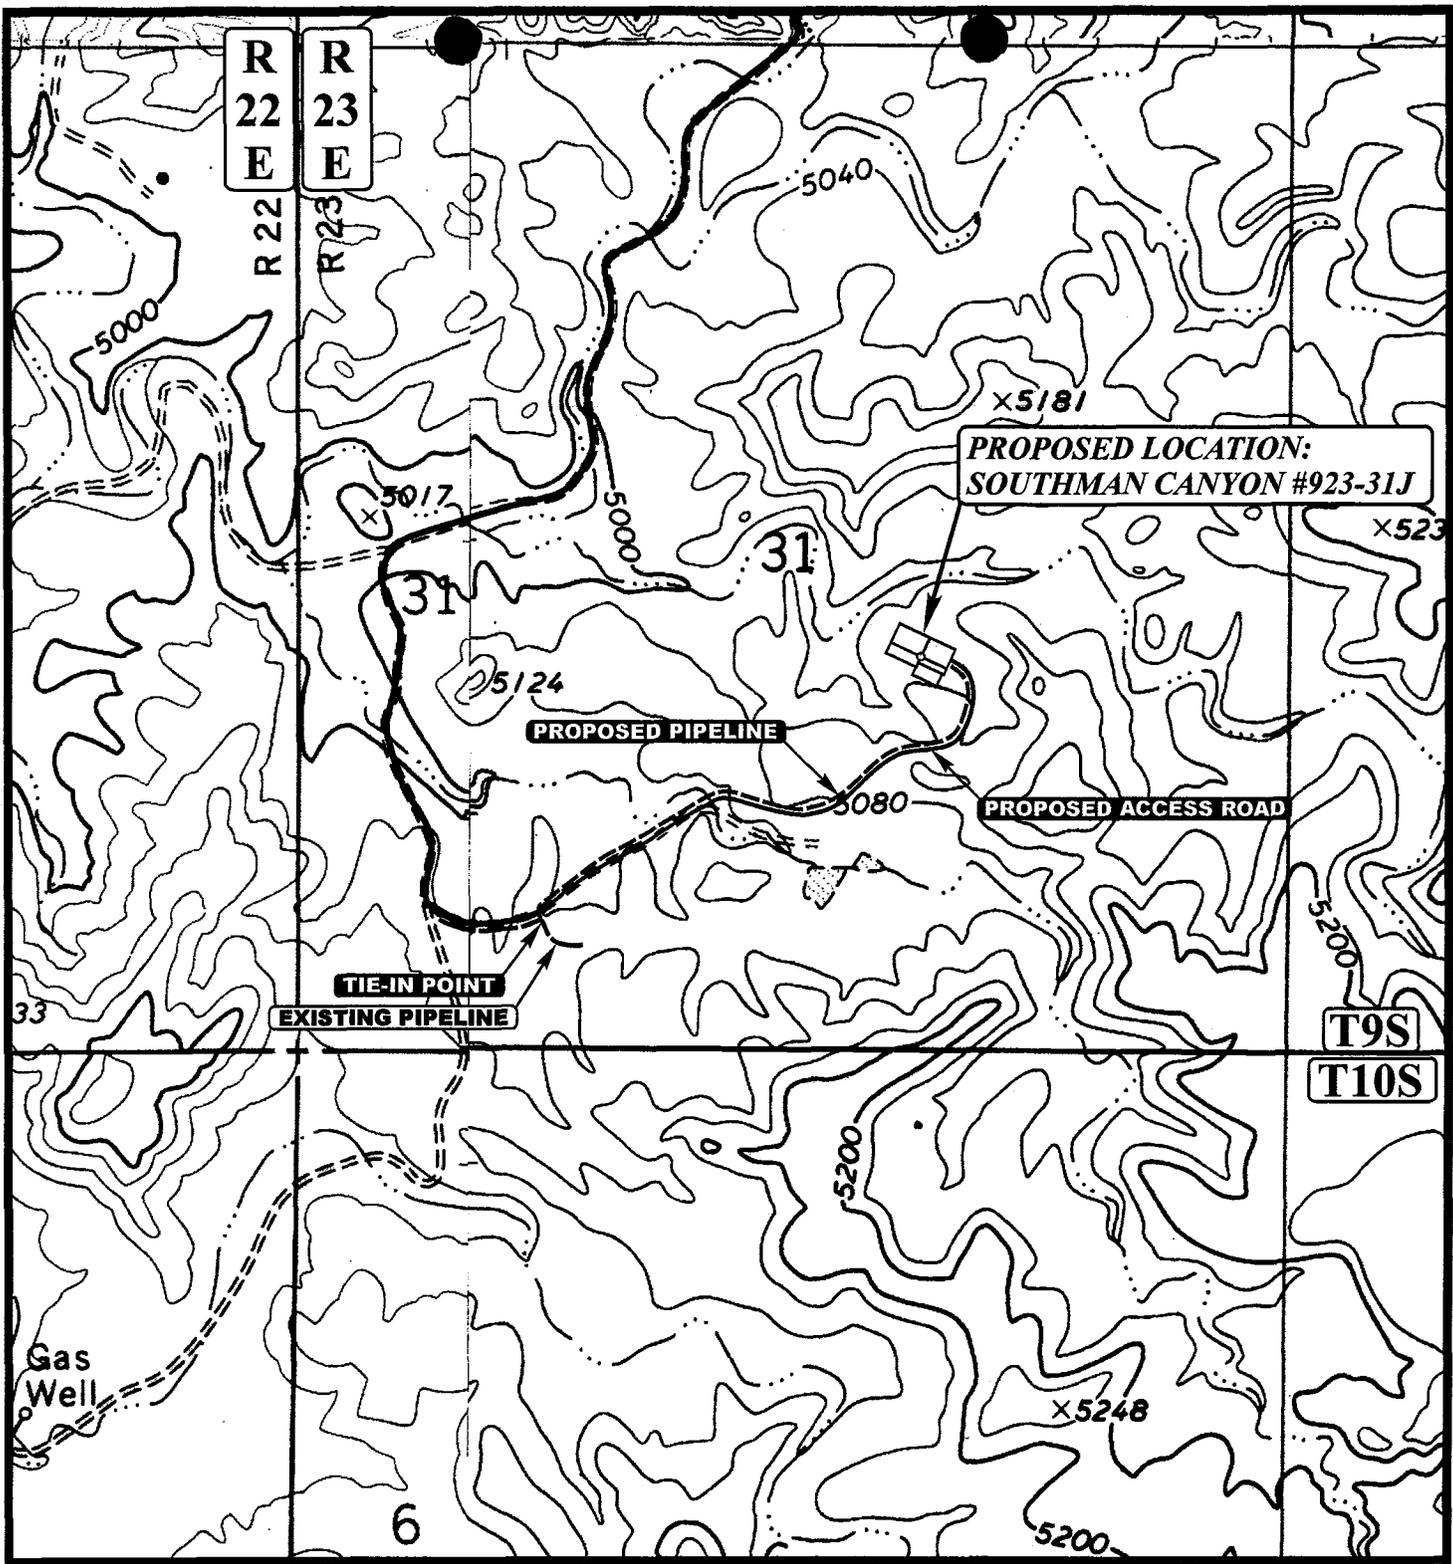

**PROPOSED LOCATION:
SOUTHMAN CANYON #923-31J**

PROPOSED PIPELINE

PROPOSED ACCESS ROAD

TIE-IN POINT

EXISTING PIPELINE

APPROXIMATE TOTAL PIPELINE DISTANCE = 3,000' +/-

LEGEND:

- EXISTING PIPELINE
- - - - - PROPOSED PIPELINE
- PROPOSED ACCESS



WESTPORT OIL & GAS COMPANY, L.P.

**SOUTHMAN CANYON #923-31J
SECTION 31, T9S, R23E, S.L.B.&M.
2075' FSL 1936' FEL**



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**

6 19 03
MONTH DAY YEAR


**D
TOPO**

SCALE: 1" = 1000' DRAWN BY: K.G. REVISED: 00-00-00

WESTPORT OIL AND GAS COMPANY, L.P.

FIGURE #1



LOCATION LAYOUT FOR
 SOUTHMAN CANYON #923-31J
 SECTION 31, T9S, R23E, S.L.B.&M.
 2075' FSL 1936' FEL



SCALE: 1" = 50'
 DATE: 06-25-03
 Drawn By: D.R.B.

NOTE:

Flare Pit is to be located a min. of 100' from the Well Head.

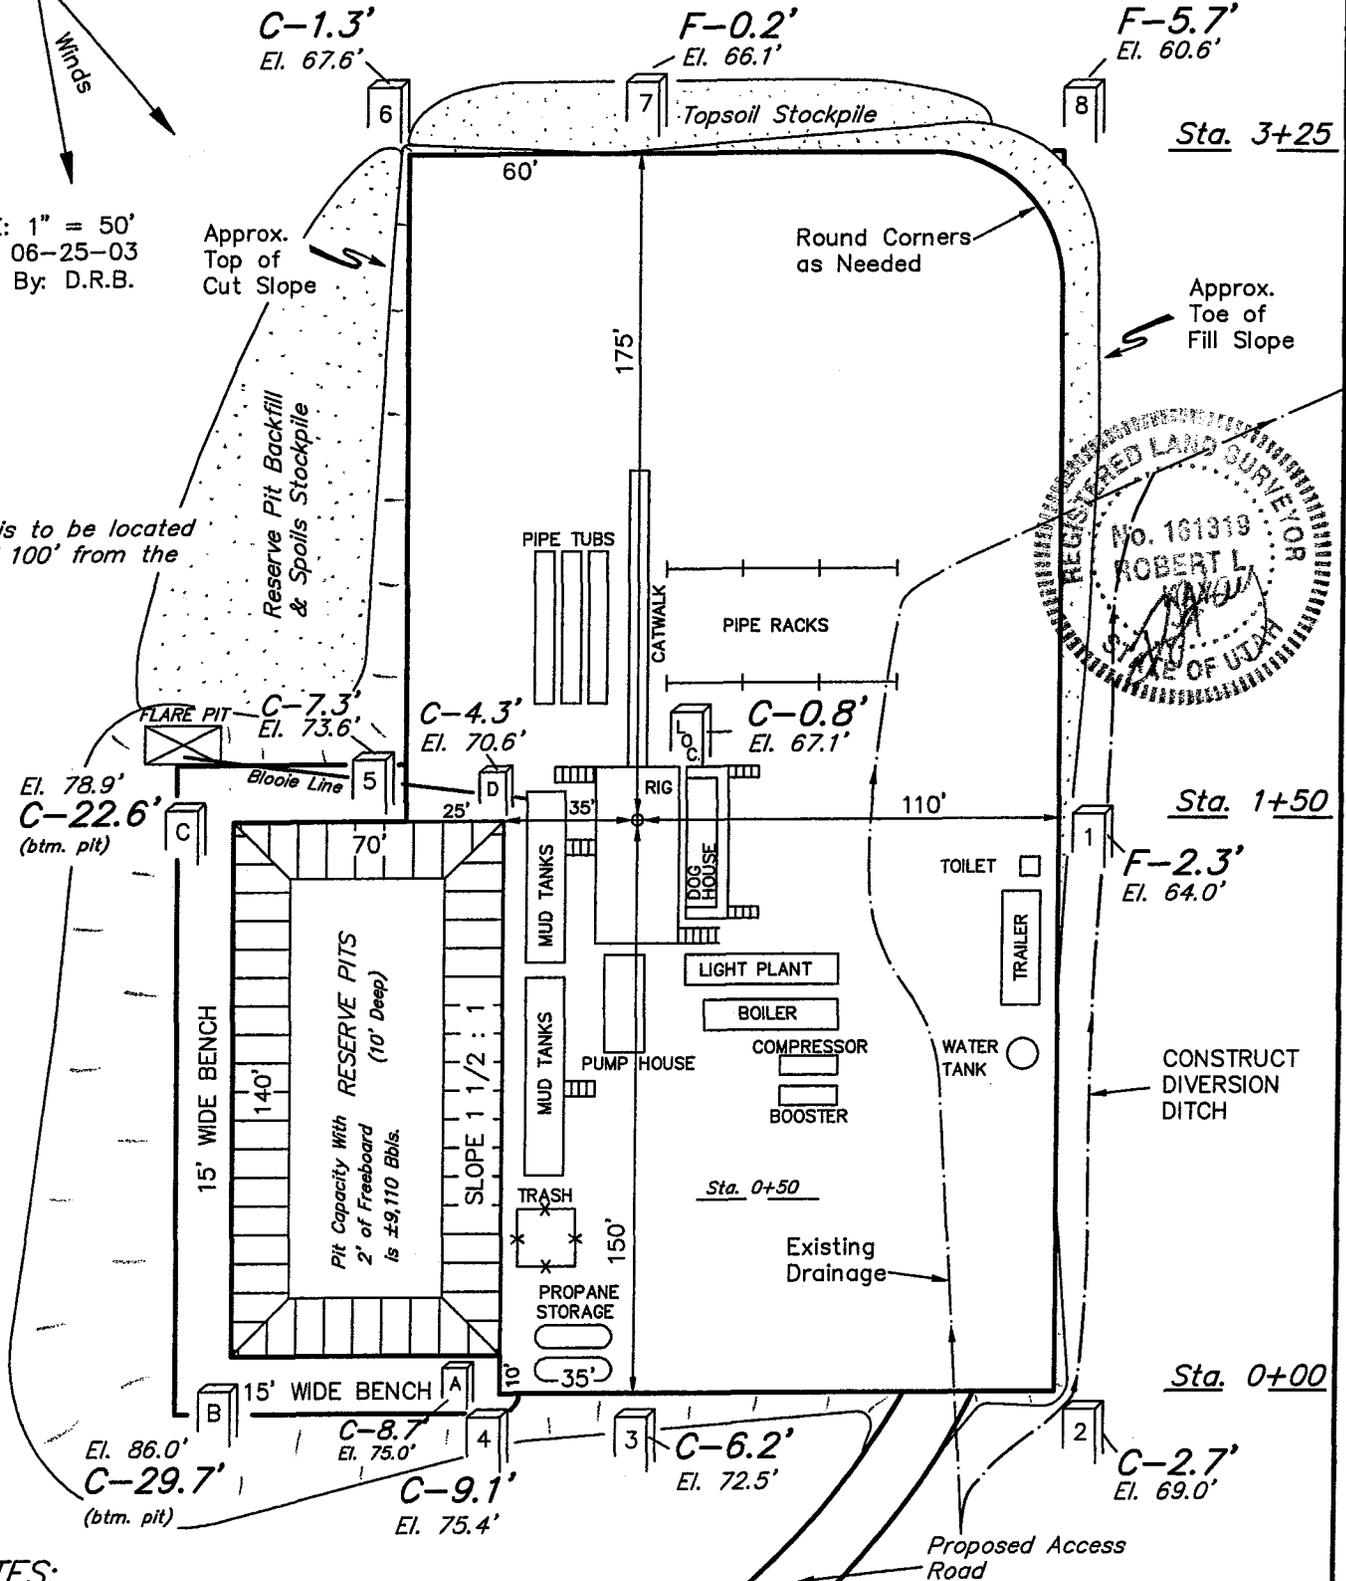

NOTES:

Elev. Ungraded Ground At Loc. Stake = 5067.1'
 FINISHED GRADE ELEV. AT LOC. STAKE = 5066.3'

UINTAH ENGINEERING & LAND SURVEYING
 85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017


WESTPORT OIL AND GAS COMPANY, L.P.

TYPICAL CROSS SECTIONS FOR
SOUTHMAN CANYON #923-31J
SECTION 31, T9S, R23E, S.L.B.&M.
2075' FSL 1936' FEL



1" = 20'
X-Section
Scale
1" = 50'

DATE: 06-25-03
Drawn By: D.R.B.

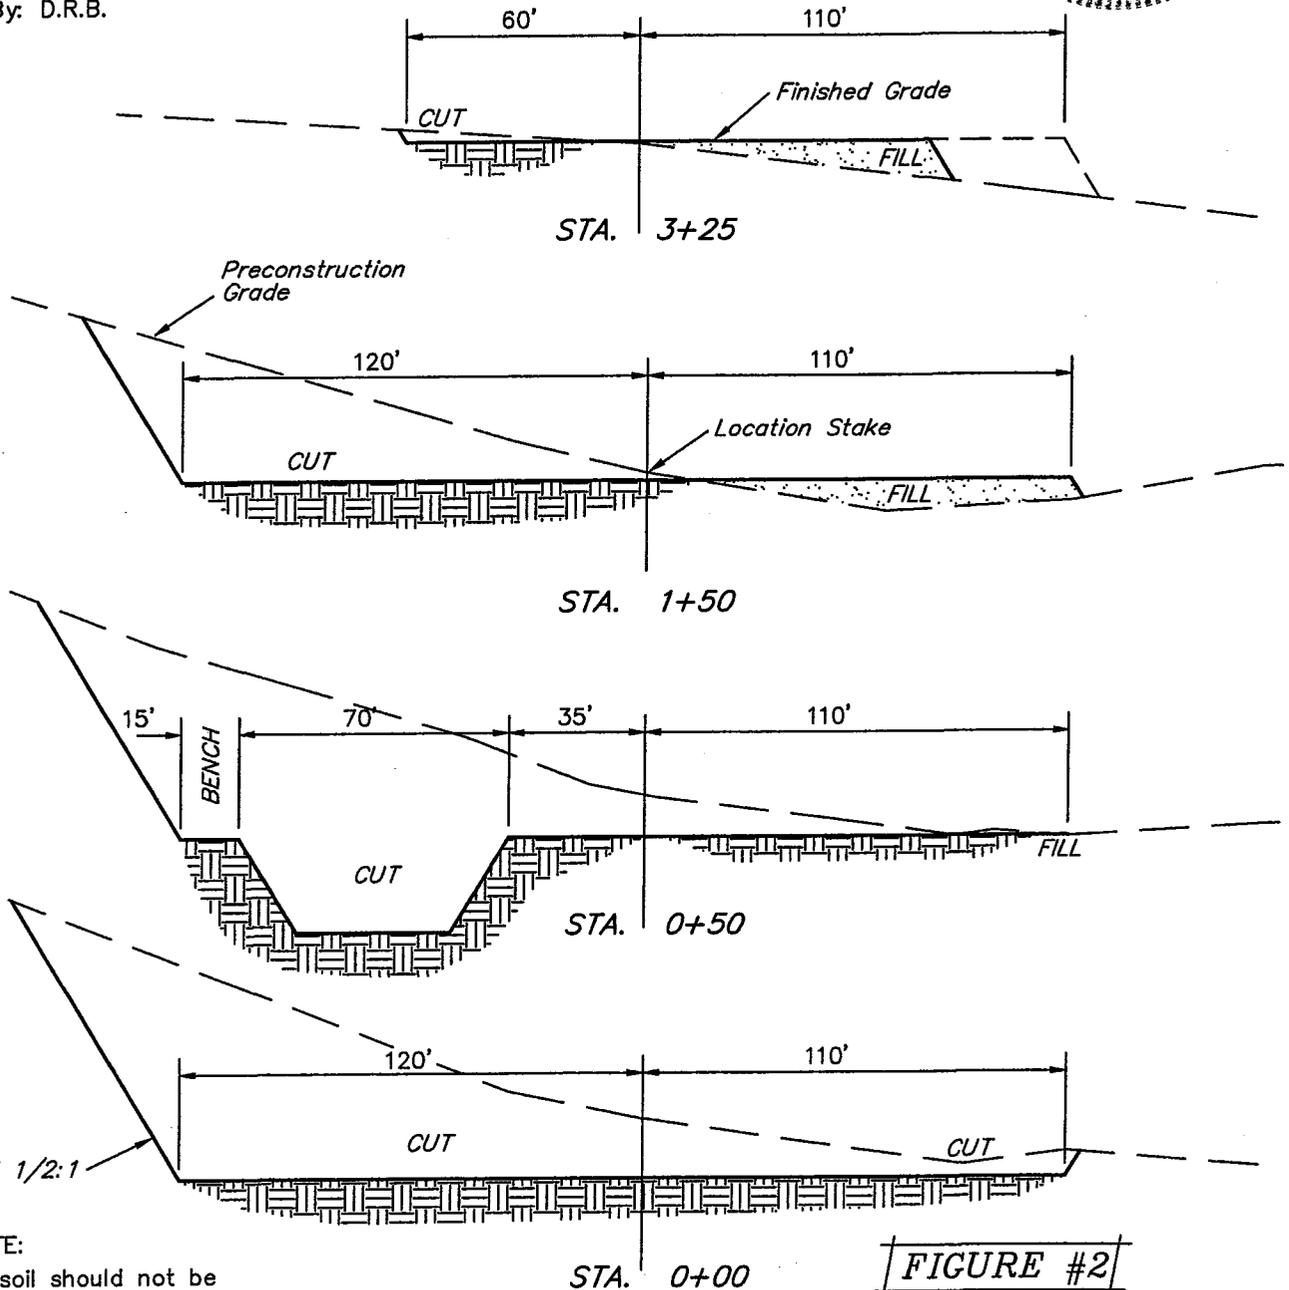

NOTE:

Topsoil should not be Stripped Below Finished Grade on Substructure Area.

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,210 Cu. Yds.
Remaining Location	= 13,640 Cu. Yds.
TOTAL CUT	= 14,850 CU.YDS.
FILL	= 2,810 CU.YDS.

FIGURE #2

EXCESS MATERIAL AFTER 5% COMPACTION	= 11,890 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 2,500 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 9,390 Cu. Yds.



Westport Oil and Gas Company, L.P.
DRILLING PROGRAM

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	16"	0-20'				2270	1370	254000
SURFACE	9-5/8"	0 to 2000	32.30	H-40	STC	7780	6350	201000
PRODUCTION	4-1/2"	0 to 2000	11.60	M-80	LTC	2.91	1.77	2.23
PRODUCTION	4-1/2"	2000 to 8900	11.60	J-55	LTC	5350	4960	162000
						1.72	1.07	2.32

- 1) Max Anticipated Surf. Press.(MASP) (Surface Casing) = (Pore Pressure at next csg point-(0.22 psi/ft-partial evac gradient x TVD of next csg point)
 2) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft-partial evac gradient x TD)
 (Burst Assumptions: TD = 10.0 ppg) .22 psi/ft = gradient for partially evac wellbore
 (Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)
 MASP 2670 psi

Burst SF is low but csg is much stronger than formation at 2000'. EMW @ 2000' for 2270# is 21.8 ppg or 1.13 psi/ft

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	LEAD	500	Premium cmt + 2% CaCl + .25 pps flocele	215	60%	15.60	1.18
	TOP OUT CMT (1)	200	20 gals sodium silicate + Premium cmt + 2% CaCl + .25 pps flocele	50		15.60	1.18
	TOP OUT CMT (2)	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
PRODUCTION	LEAD	2,750'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	290	60%	11.00	3.38
	TAIL	5,150'	50/50 Poz/G + 10% salt + 2% gel	1440	60%	14.30	1.31

* or 15% over caliper

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tall cement with bow spring centralizers.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 3M with one annular and 2 rams. Test to 3,000 psi (annular to 1,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.

Drop Totco surveys every 2000'. Maximum allowable hole angle is 5 degrees.

DRILLING ENGINEER: _____
Brad Laney



DATE: _____

DRILLING SUPERINTENDENT: _____
Randy Bayne

DATE: _____

3,000 PSI

BOP STACK

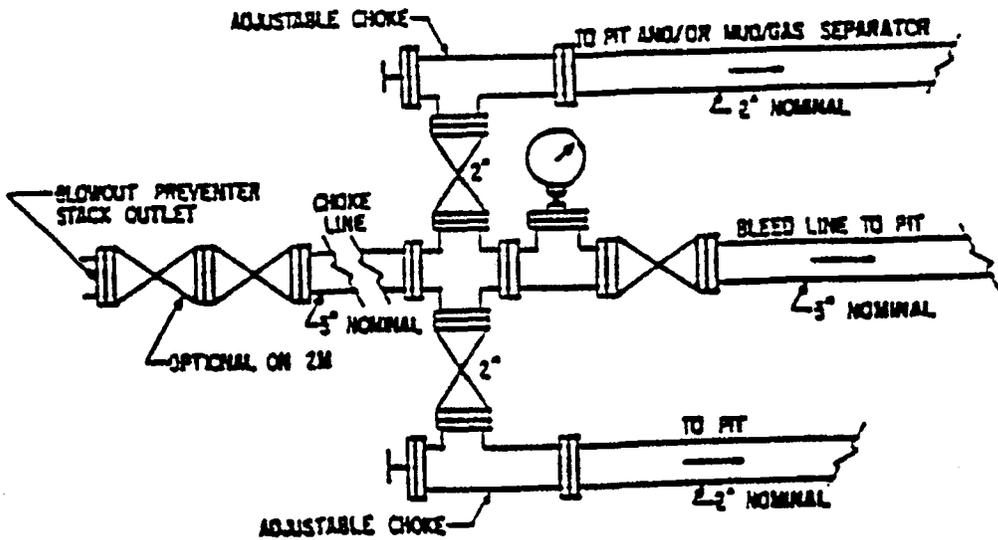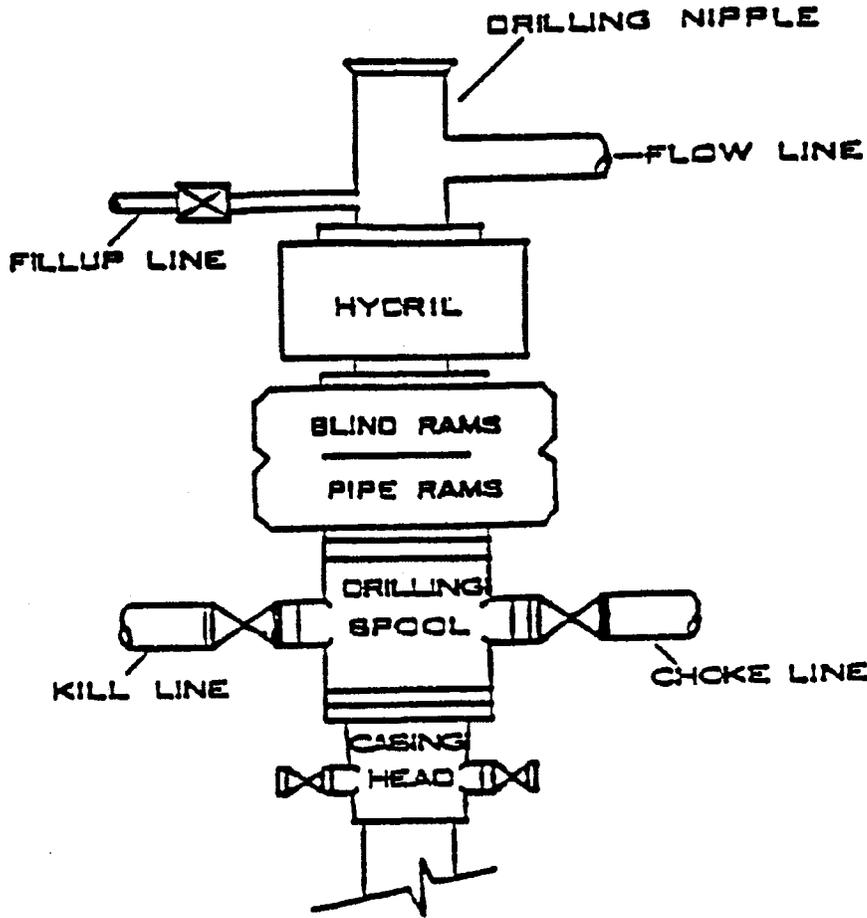

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 08/25/2003

API NO. ASSIGNED: 43-047-35149

WELL NAME: SOUTHMAN CYN 923-31J
OPERATOR: WESTPORT OIL & GAS CO (N2115)
CONTACT: DEBRA DOMENICI

PHONE NUMBER: 435-781-7060

PROPOSED LOCATION:

NWSE 31 090S 230E
SURFACE: 2075 FSL 1936 FEL
BOTTOM: 2075 FSL 1936 FEL
UINTAH
NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal
LEASE NUMBER: U-33433
SURFACE OWNER: 1 - Federal

LATITUDE: 39.99113

PROPOSED FORMATION: MVRD

LONGITUDE: 109.36645

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. CO-1203)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 43-8496)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)

LOCATION AND SITING:

- ___ R649-2-3.
Unit _____
- ___ R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- ___ R649-3-3. Exception
- Drilling Unit
Board Cause No: 179-7(80' Standup)
Eff Date: 2-3-1995
Siting: Wells to be drilled in NW 1/4 & SE 1/4 of each 1/4 Section
- ___ R649-3-11. Directional Drill

COMMENTS: Sop, Separati file

STIPULATIONS: 1-Federal approval



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

1594 West North Temple, Suite 1210
PO Box 145801
Salt Lake City, Utah 84114-5801
(801) 538-5340 telephone
(801) 359-3940 fax
(801) 538-7223 TTY
www.nr.utah.gov

Michael O. Leavitt
Governor

Robert L. Morgan
Executive Director

Lowell P. Braxton
Division Director

August 28, 2003

Westport Oil & Gas Co., L.P.
P O Box 1148
Vernal, UT 84078

Re: Southman Canyon 923-31J Well, 2075' FSL, 1936' FEL, NW SE, Sec. 31, T. 9 South,
R. 23 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-35149.

Sincerely,

A handwritten signature in black ink that reads "John R. Baza".

John R. Baza
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: Westport Oil & Gas Co., L.P.
Well Name & Number Southman Canyon 923-31J
API Number: 43-047-35149
Lease: U-33433

Location: NW SE Sec. 31 T. 9 South R. 23 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

490
RECEIVED
OCT 29 2003

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

005

APPLICATION FOR PERMIT TO DRILL OR REENTER

DIV. OF OIL, GAS & MINING
FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. U-33433
b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator WESTPORT OIL & GAS COMPANY, L.P.		7. If Unit or CA Agreement, Name and No.
3A. Address P.O. BOX 1148, VERNAL, UTAH 84078	3b. Phone No. (include area code) (435) 781-7060	8. Lease Name and Well No. SOUTHMAN CANYON 923-31J
4. Location of Well (Report location clearly and in accordance with any State requirements) At surface NWSE At proposed prod. Zone 1936' FSL 2075' FEL		9. API Well No. 43-047-35149
14. Distance in miles and direction from nearest town or post office* 23 miles southeast of Ouray, Utah		10. Field and Pool, or Exploratory Sec., T., R., M., or Blk, and Survey or Area SOUTHMAN CANYON SEC 31-T9S-R23E
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1936'	16. No. of Acres in lease 557.96	11. County or Parish Uintah
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. refer to Topo "C"	19. Proposed Depth 8900	13. State Utah
20. BLM/BIA Bond No. on file BLM BOND # CO-1203	17. Spacing Unit dedicated to this well 80	12. County or Parish Uintah
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5067.1' Ungraded GL	22. Approximate date work will start* Upon Approval	23. Estimated duration To Be Determined

RECEIVED
AUG 22 2003
BY _____

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized office. |

25. Signature <i>Debra Domenici</i>	Name (Printed/Typed) Debra Domenici	Date 8/18/2003
Title Administrative Assistant		
Approved by (Signature) <i>Howard A. Lawrence</i>	Name (Printed/Typed)	Date 10/27/2003
Title Assistant Field Manager Mineral Resources	Office	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

UDOGMA

NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Westport Oil & Gas Company, L.P.
Well Name & Number: SOUTHMAN CANYON 923-31J
API Number: 43-047-35149
Lease Number: UTU - 33433
Location: NWSE Sec. 31 TWN: 09S RNG: 23E
Agreement: N/A

NOTIFICATION REQUIREMENTS

- | | |
|---------------------------------|---|
| Location Construction | - At least forty-eight hours prior to construction of the location or access roads. |
| Location Completion | - Prior to moving on the drilling rig. |
| Spud Notice | - At least twenty-four (24) hours prior to spudding the well. |
| Casing String and Cementing | - At least twenty-four (24) hours prior to running casing and cementing all casing strings. |
| BOP and Related Equipment Tests | - At least twenty-four (24) hours prior to initiating pressure tests. |
| First Production Notice | - Within five (5) business days after new well begins, or production resumes after well has been off production for more than ninety (90) days. |

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

CONDITIONS OF APPROVAL FOR NOTICE TO DRILL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

Submit an electronic copy of all logs run on this well in LAS format. This submission will replace the requirement for submittal of paper logs to the BLM.

A. DRILLING PROGRAM

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands encountered to John Mayers of this office prior to setting the next casing string or requesting plugging orders. Faxed copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a 3M system and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

If an air compressor is on location and is being utilized to provide air for the drilling medium while drilling, the special drilling requirements in Onshore Oil and Gas Order No. 2, regarding air or gas drilling shall be adhered to. If a mist system is being utilized then the requirement for a deduster shall be waived.

3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint.

As a minimum, the usable water and oil shale resources shall be isolated and/or protected by having a cement top for the production casing at least 200 ft. above the base of the usable water zone, identified at 2,997 ft. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

A cement bond log (CBL) will be run from the production casing shoe to the top of the cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

6. Notifications of Operations

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-5(d) shall be submitted to the appropriate Field Office within 60 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (1).

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries. Tests for meter accuracy will be conducted on initial meter installations and at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, please contact one of the following individuals:

Ed Forsman (435) 828-7874
Petroleum Engineer

Kirk Fleetwood (435) 828-7875
Petroleum Engineer

BLM FAX Machine (435) 781-4410

EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids.

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids.

CONDITIONS OF APPROVAL

For The Surface Use Program Of The
Application For Permit To Drill

Company/Operator:	Westport Oil and Gas Company, L.P.	API Number:	43-047-35149
Well Name & Number:	NBU 923-31J	Surface Ownership:	BLM
Lease Number:	UTU33433	Date NOS Received:	7/18/03
Location:	NWSE Sec. 31, T9S, R23E	Date APD Received:	8/22/03

- Paint the facilities the Carlsbad Canyon color.
- Line the pit with plastic. A felt liner would not be needed unless blasting is required.
- Clean Krugar Fritz if it is dry.
- The seed mix for this location shall be:

Shadscale	<i>Atriplex confertifolia</i>	4 lbs./acre
Galleta grass	<i>Hilaria jamesii</i>	3 lbs./acre
Wyoming Bigsage	<i>Artemisia tridentata</i>	1 lbs./acre
Crested wheatgrass	<i>Agropyron cristatum</i>	4 lbs./acre

- All pounds are in pure live seed.
- Reseeding may be required if first seeding is not successful.

- 4 to 6 inches of topsoil should be stripped from the location and windrowed as shown on the cut sheet. The topsoil shall then be broadcast seeded with the recommended seed mix immediately after it has been windrowed and the seed walked into the soil with a dozer.
- The topsoil from the reserve pit should be stripped and piled separately near the reserve pit. When the reserve pit is closed, it shall be recontoured and the topsoil respread, and the area shall be seeded in the same manner as the location topsoil.
- Once the location is plugged and abandoned, it shall be recontoured to natural contours, topsoil respread where appropriate, and the entire location seeded with the recommended seed mix. Seeding should take place by broadcasting the seed and walking it into the soil with a dozer immediately after the dirt work is completed.

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATIONName of Company: WESTPORT OIL & GAS COMPANY LPWell Name: SOUTHMAN CYN 923-31JApi No: 43-047-35149 Lease Type: FEDERALSection 31 Township 09S Range 23E County UINTAHDrilling Contractor BILL JR'S RIG # RATHOLE**SPUDDED:**Date 12/11/03Time 12:30 PMHow DRY**Drilling will commence:** _____Reported by DAN LINDSAYTelephone # 1-435-828-7897Date 12/16/2003 Signed CHD

007

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING
ENTITY ACTION FORM - FORM 6

OPERATOR WESTPORT O & G CO., L.P.
ADDRESS P.O. BOX 1148
VERNAL, UTAH 84078

OPERATOR ACCT. NO. N 2115

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
A	99999	13994	43-047-35149	SOUTHMAN CANYON 923-31J	NWSE	31	9S	23E	UTAH	12/11/2003	12/18/03 12/11/2003
WELL 1 COMMENTS: MIRU BILL JR RATHOLE DRILLING AIR RIG #3 WELL SPUD 1230 HRS ON 12/11/03											
<i>MURD</i>											
WELL 2 COMMENTS:											
WELL 3 COMMENTS:											
WELL 4 COMMENTS:											
WELL 5 COMMENTS:											

ACTION CODES (See instructions on back of form)

- A - Establish new entity for new well (single)
- B - Add new well to existing entity (group of)
- C - Re-assign well from one existing entity
- D - Re-assign well from one existing entity
- E - Other (explain in comments section)

NOTE: Use COMMENT section to explain why ea
(3/89)

Post-it* Fax Note	7671	Date	# of pages
To	Erlene Russell	From	
Co./Dept.	DOGMA	Co.	
Phone #	(801) 538-5336	Phone #	
Fax #	(801) 359-3940	Fax #	

Delia Domenech
Signature

SR ADMINISTRATIVE ASST 12/12/03
Title Date

RECEIVED (435)781-7060

DEC 12 2003

DIV OF OIL, GAS & MINING

DEC-12-2003 FRI 07:40 AM EL PASO PRODUCTION

FAX NO. 4357817094

P. 01

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

008

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
U-33433

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
SOUTHMAN CANYON 923-31J

9. API Well No.
43-047-35149

10. Field and Pool, or Exploratory Area
SOUTHMAN CANYON

11. County or Parish, State
UINTAH, UTAH

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY, L.P.

3a. Address
P.O. BOX 1148, VERNAL, UTAH 84078

3b. Phone No. (include area code)
435-781-7060

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
NWSE SEC 31-T9S-R23E
1936' F E 2075' F S

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>SPUD</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

MIRU BILL JR RATHOLE DRILLING AIR RIG #3. SPUD 12 1/4" HOLE @ 1230 HRS 12/11/03. RAN 47 JTS 9 5/8" 32.3# STC CSG. PMP PRIMARY CMT AS FOLLOWS: 20 BBLS FLOGUARD, 10 BW, 160 SX CLASS G W/2% CACL2 (15.6 PPG, 1.18 FT3/SK). PMP TOP OUT CMT 100 SX CLASS G W/4% CACL2 (16.0 PPG, 1.10 FT3/SK). WOC 3 HRS. PMP TOP OUT 100 SX CLASS G W/4% CACL2, NO RETURN. WOC 2.5 HRS. PMP TOP OUT 160 SX CLASS G W/4% CACL2 AND 380 SX CLASS G W/2% CACL2, NO RETURN. WOC 2.5 HRS. PMP TOP OUT 200 SX CLASS G W/4% CACL2. PMP TOP OUT 200 SX CLASS G W/2% CACL2, NO RETURN. WOC 3 HRS. PMP TOP OUT 70 SX CLASS G W/2% CACL2, NO RETURN. WOC 1 HR. PMP TOP OUT 200 SX CLASS G (16.0 PPG, 1.10 FT3/SK) W/3% CACL2, NO RETURN. WOC 3 HRS. PMP TOP OUT 100 SX CLASS G W/4% CACL2, NO RETURN. WOC 2 HRS. PMP TOP OUT 85 SX CLASS G W/4% CACL2, CMT TO SURFACE. CMT SUMMARY: PMP 160 SX PRIMARY CMT- CLASS G W/2% CACL2 (15.6 PPG, 1.18 FT3/SK) AND 1595 SX TOP OUT CMT- CLASS G W/4% CACL2 (16.0 PPG, 1.10 FT3/SK), TOTAL CMT PMP- 1755 SX.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) DEBRA DOMENICI	Title SR ADMINISTRATIVE ASSISTANT
Signature <i>Debra Domenici</i>	Date December 19, 2003

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED
DEC 22 2003
DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

009

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
U-33433

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
SOUTHMAN CANYON 923-31J

9. API Well No.
43-047-35149

10. Field and Pool, or Exploratory
SOUTHMAN CANYON

11. County or Parish, and State
UINTAH COUNTY, UT

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY L.P
Contact: SHEILA UPCHEGO
E-Mail: supcheho@westportresourcescorp.com

3a. Address
1368 SOUTH 1200 EAST
VERNAL, UT 84078

3b. Phone No. (include area code)
Ph: 435.781.7024
Fx: 435.781.7094

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 31 T9S R23E NWSE 1936F^{EL} 2075F^{SL}

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Drilling Operations
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

FINISHED DRILLING FROM 1947' TO 8950'. RAN 4 1/2" 11.6# M-80 CSG.
CMT W/340 SX LEAD CMT, 1865 SX TAIL CMT DROP PLUG SCAVENGER BACK TO SURFACE.
CLEAN MUD PITS RELEASED RIG ON 1/3/04 AT 6 AM.

RECEIVED
JAN 12 2004
DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct.
**Electronic Submission #26543 verified by the BLM Well Information System
For WESTPORT OIL & GAS COMPANY L.P, sent to the Vernal**

Name (Printed/Typed) SHEILA UPCHEGO Title REGULATORY ANALYST

Signature *[Signature]* Date 01/05/2004

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
U-33433

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		8. Well Name and No. SOUTHMAN CANYON 923-31J
2. Name of Operator WESTPORT OIL & GAS COMPANY L.P		9. API Well No. 43-047-35149
3a. Address 1368 SOUTH 1200 EAST VERNAL, UT 84078		10. Field and Pool, or Exploratory SOUTHMAN CANYON
3b. Phone No. (include area code) Ph: 435.781.7024 Fx: 435.781.7094		11. County or Parish, and State UINTAH COUNTY, UT
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 31 T9S R23E NWSE 1936 ^{FEL} BL 2075 ^{FEL} FSL		

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Production Start-up
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	


13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

THE SUBJECT WELL LOCATION WAS PLACED ON PRODUCTION ON 1/25/04 AT 11:00 AM.
PLEASE REFER TO THE ATTACHED CHRONOLOGICAL WELL HISTORY.

RECEIVED
FEB 03 2004
DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct.

**Electronic Submission #27297 verified by the BLM Well Information System
For WESTPORT OIL & GAS COMPANY L.P, sent to the Vernal**

Name (Printed/Typed) SHEILA UPCHEGO	Title REGULATORY ANALYST
Signature  (Electronic Submission)	Date 01/28/2004

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****

WESTPORT OIL & GAS COMPANY, LP

CHRONOLOGICAL HISTORY

SOUTHMAN CANYON 923-31J

Page 1

UINTAH COUNTY, UT

SPUD	Surface Casing	Activity	Status
10/20/03		Bid Location. W/O APD	
10/21/03		Bid Location. W/O APD	
10/22/03		Bid Location. W/O APD	
10/23/03		Bid Location. W/O APD	
10/24/03		Bid Location. W/O APD	
10/27/03		Bid Location. W/O APD	
10/28/03		Bid Location. W/O APD	
10/29/03		Build Location, 10% complete	Caza 82
10/30/03		Build Location, 20% Complete	Caza 82
10/31/03		Build Location, 15% complete	Caza 82
11/3/03		Build Location, 25% Complete	Caza 82
11/4/03		Build Location, 30% complete	Caza 82
11/5/03		Build Location, 45% complete	Caza 82
11/6/03		Build Location, 45% complete	Caza 82
11/7/03		Build Location, 45% complete	Caza 82
11/10/03		Build Location, 45% complete	Caza 82
11/11/03		Build Location, 47% complete	Caza 82
11/12/03		Build Location, 47% complete	Caza 82
11/13/03		Build Location, 65% complete	Caza 82
11/14/03		Build Location, 65% complete	Caza 82
11/17/03		Build Location, 65% complete	Caza 82
11/18/03		Build Location, 70% complete	Caza 82
11/19/03		Build Location, 80% complete	Caza 82

11/20/03		Build Location, 80% complete	Caza 82
11/21/03		Build Location, 85% Complete	Caza 82
11/24/03		Build Location, 90% Complete	Caza 82
11/25/03		Build Location, 95% Complete	Caza 82
11/26/03		Build Location, 100% Complete	Caza 82
12/1/03		Location Complete	Caza 82
12/2/03		Location Complete	Caza 82
12/3/03		Location Complete	Caza 82
12/4/03		Location Complete	Caza 82
12/5/03		Location Complete	Caza 82
12/8/03		Location Complete	Caza 82
12/9/03		Build Location, 100% Complete	Caza 82
12/10/03		Set 40' 14" Conductor. WOAR	Caza 82
12/11/03		Set 40' 14" Conductor. WOAR	Caza 82
12/12/03	12/11/03	Spud 12 1/4" hole. Drlg to 350'.	Caza 82
12/15/03	12/11/03	Spud 12 1/4" hole. Drlg to 1920'.	Caza 82
12/16/03	12/11/03	9 5/8" @ 1947' Drlg to 1965'.	Caza 82
12/17/03	12/11/03	9 5/8" @ 1947'	WORT Caza 82
12/18/03	12/11/03	9 5/8" @ 1947'	WORT Caza 82
12/19/03	12/11/03	9 5/8" @ 1947'	WORT Caza 82
12/22/03	12/11/03	9 5/8" @ 1947'	WORT Caza 82
12/23/03		TD: 1965' Csg. 9 5/8" @ 1947' MW: 8.4 SD: 12/23/03 DSS:0 Rig up Caza 82. NU and test BOPE. PU BHA and DP. Tag cement @ 1886'. Drilling cement @ report time.	
12/29/03		TD: 7949' Csg. 9 5/8" @ 1947' MW10.0 SD: 12/23/03 DSS:6 Drlg from 7003'-7183'. Start to mud up system. CCH for trip. Hole tight. Increase mud weight from 8.7 ppg to 9.5 ppg. Drlg to 7379'. TFNB and MM. Drlg to 7949'. DA @ report time.	
12/30/03		TD: 8378' Csg. 9 5/8" @ 1947' MW10.2 SD: 12/23/03 DSS:6 Drlg from 7949'-8378'. DA @ report time. Raise mud weight form 10.0 ppg to 10.2 ppg to control splintering shale.	

1/2/04 TD: 8925' Csg. 9 5/8" @ 1947' MW: 10.8 SD: 12/23/03 DSS:10
TOOH for open hole logs. Wait on logging truck 2 hrs. Run OH logs to 5757'. Hit bridge. RD loggers and TIH to 3000'. Repair hydromatic, 9.5 hrs. CIH to condition well for logs @ report time.

1/5/04 TD: 8950' Csg. 9 5/8" @ 1947' MW: 11.5 SD: 12/23/03 DSS:13
Finish TIH. Drlg 25' extra rat hole to 8950' and raise mud weight to 11.5 ppg. TOOH for logs. Run PEX log. TIH and condition hole for casing. POOH laying down drill string. Run and cement 4 1/2" Production Casing @ 8950'. Set slips. ND BOPE and release rig @ 0300 hrs 1/4/03. Rig down and prepare to move to NBU 922-36I 1/6/04.

1/19/04 HELD SAFETY MEETING. RD RIG, RACK EQUIP, RDMO SC 923-31B. ROAD RIG TO SC 923-31J. MIRU, SPOT EQUIP. NDWH, NUBOP. RU FLOOR & TBG EQUIP. PU & RIH W/ 3-7/8" MILL & 240 JTS 2 3/8" NEW J-55 TBG. (SLM) EOT @ 7860'. 5:00 PM SWI. SDFWE.

1/20/04 HELD SAFETY MEETING. PU TBG. EOT (MILL) @ 7860'. CONT PU & RIH W/ 2 3/8" NEW J-55 TBG. (SLM) TAG PBT @ 8894'. TOTAL 272 JTS IN WELL. REV CIRC WELL W/ 140 BBLS 2% KCL. POOH. LD 66 JTS ON FLOAT & STOOD BACK 103 STANDS. LD MILL. RD FLOOR & TBG EQUIP. NDBOP, NU (2) 10K FRAC VALVES. MIRU DBL JACK TESTERS. TST 4 1/2" CSG & FRAC VALVES TO 7500#. (HELD GOOD) RDMO DBL JACK. RU FLOOR. MIRU CUTTERS. RIH & DUMP BAIL 12 GALS 15% HCL ACROSS PERFS @ 8588'. PERF SEGO @ 8582'-8588' & 8615'-8617' USING 3 3/8" EXP GUNS, 23 GRAM CHARGES, 0.35, 90 DEG PHASING, 4 SPF, (32 HOLES). POOH. RDMO CUTTERS. PREP TO FRAC W/ BJ IN AM. 5:00 PM SWI, SDFN.

1/21/04 MIRU CUTTERS. WO BJ (PROBS ON NBU 371). MIRU BJ. PT SURF TO 8500#. WH 150#. PERF ONLY STAGE. BRK DN SEGO PERFS @ 4222 @ 4 BPM. PMP'D 100 BBLS 2% KCL @ 6855# @ 37 BPM. ISIP: 2900#, FG: .76. CALC 14 PERFS OPEN. BALL OUT PERFS W/6 BBLS 15% HCL, 160 BBLS 2% KCL W/50 BIO-BALLS. SURGE 3 TIMES, LET BALLS FALL TO BTM, 20 MIN.
STAGE 1: RIH W/10K CBP & PERF GUN. SET PLUG @ 8250'. PERF MV 7972'-78', 8019'-26', 8043'-48', 8104'-08', 8173'-78', 3 3/8" EXP GUN, 23 GRAM CHARGES, .35" HOLE, 120 DEG PHASING, 2 SPF, 54 HOLES. POOH. 2 RUNS FOR CUTTERS. 7:00 PM SWI. SDFN.
DC:\$541,307 CONST C:\$ COMP C:\$45,790 CWC:\$587,097

1/22/04 HELD SAFETY MEETING. PT SURF LINES TO 8550#, WHP: 1670#.
STAGE 1: CONT ON. BRK DN PERFS @ 3126# @ 3 BPM. PMP'D 31 BBLS 2% KCL @ 4250# @ 24 BPM. ISIP: 2700#, FG: .77. PMP'D 2492 BBLS LIGHTNING 18 GEL, 303,405# 20/40
MESH SD. ISIP: 3250#, FG: .84, NPI: 550#, MTP: 5100#, MTR: 40.4 BPM, ATP: 4760#, ATR: 40.3 BPM. TAGGED W/ IRIIDIUM.
STAGE 2: RIH W/ 4-1/2" BAKER 10K CBP & PERF GUNS. SET CBP @ 7900'. PERF MV @ 7788'-7795', 7818'-7828' & 7850'-7862' USING 3 3/8" EXP GUNS, 23 GRAM CHARGES, 0.35, 120 DEG PHASING, 2 SPF, (58 HOLES) 2 RUNS FOR CUTTERS. BRK DN PERFS @ 4044# @ 3 BPM. PMP'D 43 BBLS 2% KCL @ 5460# @ 31 BPM. ISIP: 2800#, FG: .79. PMP'D 2494 BBLS LIGHTNING 18 GEL, 303,826# 20/40 MESH SD. ISIP: 3600#, FG: .89, NPI: 800#, MTP: 5270#, MTR: 42.5 BPM, ATP: 4930#, ATR: 42.4 BPM. TAGGED W/ IRIIDIUM. (PERF ONLY STAGE) RIH W/ 4-1/2" BAKER 5K CBP & PERF GUNS. SET CBP @ 7700'. PERF WASATCH @ 6552'-6560', MV @ 7616'-7618' & 7674'-7683' USING 3 3/8" EXP GUNS, 23 GRAM CHARGES, 0.35, 90 DEG PHASING, 4 SPF, (76 HOLES) 2 RUNS FOR CUTTERS. BRK DN PERFS @ 2029# @ 4 BPM. PMP'D 48 BBLS 2% KCL @ 4270# @ 36 BPM. ISIP: 1700#, FG: .68, CALCULATED 62 PERFS OPEN.

STAGE 3: RIH W/ 4 1/2" BAKER 5K CBP & PERF GUNS. SET CBP @ 6520'. PERF WASATCH @ 6442-6447', 2 SPF, 120 DEG PHASING & 6456'-6462', 4 SPF, 90 DEG PHASING USING 3 3/8" EXP GUNS, 23 GRAM CHARGES, 0.35, (54 HOLES) 1 RUN FOR CUTTERS. BRK DN PERFS @ 1755# @ 4 BPM. PMP'D 28 BBLs 2% KCL @ 3700# @ 32 BPM. ISIP: 2100#, FG: .76. PMP'D 1553 BBLs LIGHTNING 18 GEL, 180,408# 20/40 MESH SD. ISIP: 3000#, FG: .90, NPI: 900#, MTP: 3780#, MTR: 33.2 BPM, ATP: 3600#, ATR: 32.9 BPM.

STAGE 4: RIH W/ 4 1/2" BAKER 5K CBP & PERF GUNS. SET CBP @ 5850'. PERF WASATCH @ 5780'-5794' USING 3 3/8" EXP GUNS, 23 GRAM CHARGES, 0.35, 120 DEG PHASING, 3 SPF, (42 HOLES) 1 RUN FOR CUTTERS. DRAIN PMPS & LINES.

1/23/04

HELD SAFETY MEETING. PT SURF LINES TO 8500#. WHP: 400#.

STAGE 4: CONT ON. BRK DN PERFS @ 2100# @ 3 BPM. PMP'D 35 BBLs 2% KCL @ 2680# @ 30 BPM. ISIP: 1250#, FG: .65. PMP'D 1385 BBLs LIGHTNING 18 GEL, 155,063# 20/40

MESH SD. ISIP: 1700#, FG: .73, NPI: 450#, MTP: 2530#, MTR: 32.4 BPM, ATP: 2360#, ATR: 32 BPM.

STAGE 5: RIH W/ 4 1/2" BAKER 5K CBP & PERF GUNS. SET CBP @ 5550'. PERF WASATCH @ 5456'-5470' USING 3 3/8" EXP GUNS, 23 GRAM CHARGES, 0.35", 120 DEG PHASING, 2 SPF, (28 HOLES) 1 RUN FOR CUTTERS. BRK DN PERFS @ 2524# @ 3 BPM. PMP'D 33 BBLs 2% KCL @ 2680# @ 29 BPM. ISIP: 1500#, FG: .71, PMP'D 1421 BBLs LIGHTNING 18 GEL, 172,312# 20/40 MESH SD. ISIP: 1900#, FG: .78, NPI: 400#, MTP: 2590#, MTR: 31.2 BPM, ATP: 2435#, ATR: 31 BPM. RIH W/ 4 1/2" BAKER 5K CBP & SET @ 5250'. POOH. RDMO CUTTERS & BJ. ND FRAC VALVES, NUBOP & DRLG RUBBER. RU FLOOR & TBG EQUIP. RIH W/ 3 7/8" MILL TOOTH BIT, POBS, TRN NIPPLE & NEW 2 3/8" J-55 TBG.

EOT @ 5230'. RU SWVL. PREP TO DRILL CBP'S IN AM. TOTAL FLUID PMP: 9653 BBLs. TOTAL 20/40 MESH SD: 1,115,014#. 3:00 PM SWI, SDFN.

1/26/04

7AM (DAY 6) H.S.M. DRLG CBP'S & DRLG EQUIPMENT.

EOT (BIT) @ 5230'. ESTABLISH CIRCULATION W/ 2% KCL W/ RIG PMP.(DRLG CBP#1) @ 5250'. DRILL OUT 5K CBP IN 5 MIN. 400# DIFF. RIH, TAG SD @ 5460'C/O 90' SD.

(DRLG CBP#2) @ 5550'. DRILL OUT 5K CBP IN 25 MIN. 50# DIFF. RIH, TAG SD @ 5795'C/O 55' SD. (DRLG CBP#3) @ 5850'. DRILL OUT 5K CBP IN 10 MIN. 0# DIFF. RIH, TAG SD @ 6470'.C/O 50' SD.

(DRLG CBP#4) @ 6520'. DRILL OUT 5K CBP IN 10 MIN. 100# DIFF. RIH, TAG CBP#5 @ 7700'. (DRLG CBP#5) @ 7700'. DRILL OUT 5K CBP IN 30 MIN. 900# DIFF. RIH, TAG SD @ 7860'C/O 40' SD. (DRLG CBP#6) @ 7900'. DRILL OUT 10K CBP IN 25

MIN.400#DIFF.RIH,TAG SD @ 8180' C/O70' SD. (DRLG CBP#7) @ 8250'.DRILL OUT 10K CBP IN 20 MIN.0#DIFF. R/D SWVL, RIH TO PBTD @ 8894'. CIRC WELL CLEAN. P.O.O.H. & L/D 30 JTS ON FLOAT. LAND TBG ON HANGER W/ 242 JTS NEW 2-3/8" J-55 TBG. R/D FLOOR & TBG EQUIPMENT.

EOT @ 7935.67', TRN @ 7933.57'. NDBOP, NUWH, DROP BALL & PMP OFF THE BIT @ 0000# AVG 18 MIN/PLUG & C/O A TOTAL OF 305' SD. 4PM FLOW WELL BACK TO PIT ON OPEN CHOKE. FTP=300#, SICP=1300#. R/DRIG, RACK EQUIPMENT.5PM FTP=300#, SICP=1250#. RCVR'D 150 BBLs. TURN WELL OVER TO FLOW BACK CREW. LTR @ 5PM=6550 BBLs.

WELL WENT ON SALES: 01/25/2004, 11:00AM, 1500 MCF, 19/64" CHK, SICP: 1500#, FTP: 1450#, 8BWPB.

ON SALES

1/24/04: 1479 MCF, 0 BC, 200 BW, TP: 1259#, CP: 1600#, 19/64" CHK, 17 HRS, LP: 399#.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: November 30, 2000

011

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5. Lease Serial No.
U-33433

1a. Type of Well Oil Well Gas Well Dry Other
 b. Type of Completion New Well Work Over Deepen Plug Back Diff. Resvr.
 Other _____

2. Name of Operator: WESTPORT OIL & GAS COMPANY Contact: DEBRA DOMENICI
 E-Mail: ddomenic@westportresourcescorp.com

3. Address 1368 S 1200 E VERNAL, UT 84078 3a. Phone No. (include area code) Ph: 435.781.7060

4. Location of Well (Report location clearly and in accordance with Federal requirements)*
 Sec 31 T9S R23E Mer UBM
 At surface NWSE 1936FSL 2075FEL
 At top prod interval reported below
 At total depth

6. If Indian, Allottee or Tribe Name
 7. Unit or CA Agreement Name and No.
 8. Lease Name and Well No. SOUTHMAN CANYON 923-31J
 9. API Well No. 43-047-35149
 10. Field and Pool, or Exploratory SOUTHMAN CANYON
 11. Sec., T., R., M., or Block and Survey or Area Sec 31 T9S R23E Mer UBM
 12. County or Parish UINTAH 13. State UT
 17. Elevations (DF, KB, RT, GL)* 5067 GL

15. Date T.D. Reached 01/03/2004 16. Date Completed 01/25/2004
 D & A Ready to Prod.

18. Total Depth: MD 8950 TVD 8950 19. Plug Back T.D.: MD 8904 TVD 8904 20. Depth Bridge Plug Set: MD TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
 ✓ GRI/LC/GRI, CN/TLD/GRI, MICROLOG/GRI, 1-9-04
 GRI/CBL - Rec 1-13-04

22. Was well cored? No Yes (Submit analysis)
 Was DST run? No Yes (Submit analysis)
 Directional Survey? No Yes (Submit analysis)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sks. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
						1865	435		
12.250	9.625 J-55	32.3		1948		1755	34		
7.875	4.500 M-80	11.6		8950		340	122		
						1865	435		

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2.375	7936							

25. Producing Intervals 26. Perforation Record

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) MESAVERDE	6547	8950	8582 TO 8617		32	
B)			7972 TO 8178		54	
C)			7788 TO 7862		58	
D)			6442 TO 6462		54	

27. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Depth Interval	Amount and Type of Material
8582 TO 8617	PUMP 100 BBLS 2% KCL
7972 TO 8178	PUMP 2492 BBLS LIGHTNING 18 GEL, 303,405# 20/40 MESH SD
7788 TO 7862	PUMP 2494 BBLS LIGHTNING 18 GEL, 303,826# 20/40 MESH SD
6442 TO 6462	PUMP 1553 BBLS LIGHTNING 18 GEL, 180,408# 20/40 MESH SD

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
01/25/2004	01/31/2004	24	→	0.0	2711.0	180.0			FLOWES FROM WELL
Choke Size	Tbg. Press. Flwg.	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
26/64	SI 838	1376.0	→	0	2711	180		PGW	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg.	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
	SI		→						

RECEIVED
FEB 19 2004

DIV. OF OIL, GAS & MINING

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

29. Disposition of Gas(Sold, used for fuel, vented, etc.)
SOLD

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
GREEN RIVER	1262	4264			
WASATCH	4264	6547			
MESAVERDE	6547	8950			

32. Additional remarks (include plugging procedure):

ADDITIONAL PERFS- 5456-5470 28 HOLES FRAC- PUMP 1421 BBLS LIGHTNING 18 GEL, 172,312# 20/40 MESH SD

CEMENT INFO-

9 5/8 CSG- 1755 SX G 1.18 YIELD 15.6 PPG 188.8 CF 33.6 BBLS
4 1/2 CSG- 340 SX LIGHTWEIGHT PREM LITE II 3.38 YIELD 11 PPG 1078.22 CF 122 BBLS; 1865 SX
50/50 POZ MIX CLASS G 1.31 YIELD 14.3 PPG 2443.15 CF 435.1 BBLS

33. Circle enclosed attachments:

- | | | | |
|---|--------------------|---------------|-----------------------|
| 1. Electrical/Mechanical Logs (1 full set req'd.) | 2. Geologic Report | 3. DST Report | 4. Directional Survey |
| 5. Sundry Notice for plugging and cement verification | 6. Core Analysis | 7 Other: | |

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions):

Electronic Submission #27722 Verified by the BLM Well Information System.
For WESTPORT OIL & GAS COMPANY, sent to the Vernal

Name (please print) DEBRA DOMENICI

Title SR ADMINISTRATIVE ASSISTANT

Signature (Electronic Submission)

Date 02/09/2004

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ****

Additional data for transaction #27722 that would not fit on the form

26. Perforation Record, continued

Perf Interval	Size	No. Holes	Perf Status
5780 TO 5794		42	

27. Acid, Fracture, Treatment, Cement Squeeze, etc., continued

Depth Interval	Amount and Type of Material
5780 TO 5794	PUMP 1385 BBLs LIGHTNING 18 GEL, 155,063# 20/40 MESH SD

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY, L.P.

3a. Address
1368 SOUTH 1200 EAST, VERNAL, UTAH 84078

3b. Phone No. (include area code)
435-781-7060

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
MULTIPLE WELLS- SEE ATTACHED

5. Lease Serial No.
MULTIPLE WELLS- SEE ATTACHED

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
MULTIPLE WELLS- SEE ATTACHED

8. Well Name and No.
MULTIPLE WELLS- SEE ATTACHED

9. API Well No.
MULTIPLE WELLS- SEE ATTACHED

10. Field and Pool, or Exploratory Area
BONANZA/SOUTHMAN CANYON

11. County or Parish, State
UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize <input type="checkbox"/> Deepen <input type="checkbox"/> Production (Start/Resume) <input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing <input type="checkbox"/> Fracture Treat <input type="checkbox"/> Reclamation <input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair <input type="checkbox"/> New Construction <input type="checkbox"/> Recomplete <input checked="" type="checkbox"/> Other VARIANCE
	<input type="checkbox"/> Change Plans <input type="checkbox"/> Plug and Abandon <input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection <input type="checkbox"/> Plug Back <input type="checkbox"/> Water Disposal

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

Westport Oil & Gas requests a variance to Onshore Order No. 4, Part III C. a. requiring each sales tank be equipped with a pressure- vacuum thief hatch and/or vent line valve. The variance is requested as an economic analysis shows the value of the shrunk condensate will not payout the incremental cost of purchasing and maintaining the valve resulting in a loss of value over the producing life of the well.

The volume lost to shrinkage by dropping the tank pressure from 6 ozs. To 0 psig is shown to be 0.3% of the tank volume. This was determined by lab analysis of a representative sample from the field. The sample shrunk from 98.82% of original volume to 98.52% when the pressure was dropped. The average well produces approximately 6 bbls condensate per month. The resulting shrinkage would amount to 0.56 bbls per month lost volume due to shrinkage. The value of the shrunk and lost condensate does not recoup or payout the cost of installing and maintaining the valves and other devices that hold the positive tank pressure. An economic run based on the loss and costs is attached. Westport Oil & Gas requests approval of this variance in order to increase the value of the well to the operator and the mineral royalty owners.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) DEBRA DOMENICI	Title ENVIRONMENTAL ASSISTANT
Signature <i>Debra Domenici</i>	Date July 9, 2004

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
	Accepted by the Utah Division of Oil, Gas and Mining	

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

COPY SENT TO OPERATOR
 Date: **2-16-04**
 Initials: **CHD**

Date: **7/15/04**
 By: *[Signature]*
RECEIVED
JUL 14 2004

Westport Oil & Gas, L.P.

Project Economics Worksheet

Instructions: Fill in blue boxed areas with before and after project data. The evaluation results are shown below and graphed automatically at the bottom of the page. This sheet is protected to prevent accidental alteration of the formulas. See JTC for changes. OPX entered as annual costs and/or as unit OPX costs for \$/BF and \$/MCF

Project Name: **Condensate Shrinkage Economics**

Is this job a well pull or production rig job ??? **N** (Y or N)

	BEFORE \$/Year	AFTER \$/Year	DIFFERENCE \$/Year
Gross Oil Revenue	\$1,088	\$1,099	\$11
Gross Gas Revenue	\$0	\$0	\$0
NGL Revenue	\$0	\$0	\$0
PULLING UNIT SERVICE			\$0
WIRELINE SERVICE			\$0
SUBSURF EQUIP REPAIRS			\$0
COMPANY LABOR			\$0
CONTRACT LABOR	\$0	\$200	\$200
CONTR SERVICE			\$0
LEASE FUEL GAS	\$0	\$0	\$0
UTILITIES - ELECTRICITY	\$0	\$0	\$0
CHEMICAL TREATING			\$0
MATERIAL & SUPPLY	\$0	\$150	\$150
WATER & HAULING			\$0
ADMINISTRATIVE COSTS			\$0
GAS PLANT PROCESSING			\$0
Totals	\$0	\$350	\$350 Increased OPX Per Year

Investment Breakdown:

	Cap/Exp Code	Cost, \$
Capital \$	820/830/840	\$1,200
Expense \$	830/860	\$0
Total \$		\$1,200

Oil Price	\$ 23.00	\$/BO
Gas Price	\$ 3.10	\$/MCF
Electric Cost	\$ -	\$/ HP / day
OPX/BF	\$ 2.00	\$/BF
OPX/MCF	\$ 0.62	\$/MCF

Production & OPX Detail:

	Before	After	Difference
Oil Production	0.192 BOPD	0.194 BOPD	0.002 BOPD
Gas Production	0 MCFPD	0 MCFPD	0 MCFPD
Wtr Production	0 BWPD	0 BWPD	0 BWPD
Horse Power	0 HP	0 HP	0 HP
Fuel Gas Burned	0 MCFPD	0 MCFPD	0 MCFPD

Project Life:

Life = **20.0** Years
(Life no longer than 20 years)

Internal Rate of Return:

After Tax IROR = **#DIV/0!**

AT Cum Cashflow:

Operating Cashflow = **(\$2,917)** (Discounted @ 10%)

Payout Calculation:

$$\text{Payout} = \frac{\text{Total Investment}}{\text{Sum(OPX + Incremental Revenue)}} = 1$$

Payout occurs when total AT cashflow equals investment
See graph below, note years when cashflow reaches zero

Payout = **NEVER** Years or **#VALUE!** Days


Gross Reserves:

Oil Reserves = **6 BO**
Gas Reserves = **0 MCF**
Gas Equiv Reserves = **38 MCFE**

Notes/Assumptions:

An average NBU well produces 0.192 Bcpd with no tank pressure. The production is increased to 0.196 Bcpd if 6 ozs of pressure are placed on the tank. The increased production does not payout the valve cost or the estimated annual maintenance costs.

Project: Condensate Shrinkage Economics

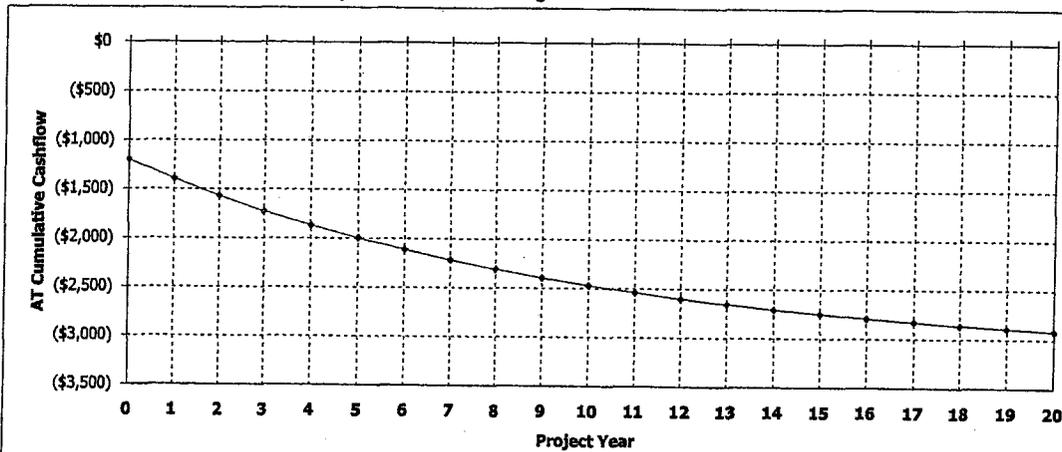

Westport Oil and Gas, Inc.
NBU/Ouray Field
RFL 2003-022

COMPARISON OF FLASH BACK PRESSURES

Calculated by Characterized Equation-of-State

Flash Conditions		Gas/Oil Ratio (scf/STbbl) (A)	Specific Gravity of Flashed Gas (Air=1.000)	Separator Volume Factor (B)	Separator Volume Percent (C)
psig	°F				

Calculated at Laboratory Flash Conditions

80	70			1.019	
0	122	30.4	0.993	1.033	101.37%
0	60	0.0	—	1.000	98.14%

Calculated Flash with Backpressure using Tuned EOS

80	70			1.015	
6.0 oz	65	24.6	0.777	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
4.0 oz	65	24.7	0.778	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
2.0 oz	65	24.7	0.779	1.003	98.82%
0	60	0.0	—	1.000	98.52%
80	70			1.015	
0	65	24.8	0.780	1.003	98.82%
0	60	0.0	—	1.000	98.52%

(A) Cubic Feet of gas at 14.696 psia and 60 °F per Barrel of Stock Tank Oil at 60 °F.

(B) Barrels of oil at indicated pressure and temperature per Barrel of Stock Tank Oil at 60 °F.

(C) Oil volume at indicated pressure and temperature as a percentage of original saturated oil volume.

Note: Bubblepoint of sample in original sample container was 80 psig at 70° F with 1 cc water

**ALL WELLS ROCKY MOUNTAIN GAS- BONANZA/SOUTHMAN
CANYON ENARDO VARIANCE**

012

WELL	LEGALS				STF LEASE NO	CA NUMBER	API NO
	SEC	TWN	RGE	QTR/QTR			
BONANZA 04-06	4	10S	23E	NESW	U-33433	UTU33433	430473475100S1
BONANZA 06-02	6	10S	23E	NESW	UTU38419	UTU38419	430473484300S1
BONANZA 08-02	8	10S	23E	SESE	UTU37355	UTU37355	430473408700S1
BONANZA 08-03	8	10S	23E	NWNW	U-37355	UTU37355	430473477000S1
BONANZA 09-05	9	10S	23E	SESW	U-37355	UTU37355	430473486600S1
BONANZA 09-06	9	10S	23E	NWNE	U-37355	UTU37355	430473477100S1
BONANZA 10-02	10	10S	23E	NWNW	U72028	UTU80201	430473470400S1
BONANZA 10-03	10	10S	23E	NWNE	UTU38261	CR-5	430473472800S1
BONANZA 10-04	10	10S	23E	SENE	UTU40736	CR-5	430473477200S1
BONANZA 1023-4E	4	10S	23E	SWNW	U-33433		43047353920S1
BONANZA 1023-6C	6	10S	23E	NENW	U-38419	UTU38419	430473515300S1
BONANZA 1023-7B	7	10S	23E	NWNE	U-38420	UTU38420	430473517200S1
BONANZA 1023-7L	7	10S	23E	NWSW	U-38420		430473528900S1
BONANZA 11-02	11	10S	23E	SWNW	UTU38425	CR-23	430473477300S1
BONANZA FEDERAL 03-15	15	10S	23E	NENW	UTU38428	UTU38428	430473127800S1
CANYON VIEW FEDERAL 1-18	18	10S	23E	SENE	UTU38421	UTU38421	430473037900S1
CROOKED CYN FED 1-17	17	10S	23E	NESW	UTU37355	UTU37355	430473036900S1
FLAT MESA FEDERAL 1-7	7	10S	23E	NWSE	UTU38420	UTU38420	430473036500S1
FLAT MESA FEDERAL 2-7	7	10S	23E	SENE	UTU38420	UTU38420	430473054500S1
JACK RABBIT 1-11	11	10S	23E	SWNE	UTU38425	CR-23	430473042300S1
LOOKOUT POINT STATE 1-16	16	10S	23E	NESE	ML22186A		430473054400S1
NO NAME CANYON 1-9	9	10S	23E	SENE	UTU037355	UTU37355	430473037800S1
NO NAME CANYON 2-9	9	10S	23E	NENW	UTU037355	UTU37355	430473150400S1
NSO FEDERAL 1-12	12	10S	23E	NENW	UTU38423	CR-22	430473056000S1
PETE'S FLAT 1-1	1	10S	23E	NESE	UTU40736		430473055800S1
SAGE HEN FEDERAL 1-6	6	10S	23E	NESE	UTU38419	CR-3	430473038200S1
SAGEBRUSH FEDERAL 1-8	8	10S	23E	SWNE	UTU37355	UTU37355	430473038300S1
SHEEPHERDER FEDERAL 1-10	10	10S	23E	NESE	UTU38424	CR-5	430473055900S1
SOUTHMAN CANYON 01-05 FED	5	10S	23E	SENE	UTU33433	UTU74473	430473085600S1
SOUTHMAN CANYON 04-04	4	10S	23E	NWSE	UTU33433	UTU33433	430473063200S1
SOUTHMAN CANYON 04-05	5	10S	23E	NESE	UTU33433	UTU33433	430473063300S1
SOUTHMAN CANYON 09-03M	9	10S	23E	SWSW	UTU37355	UTU37355	430473254000S1
SOUTHMAN CANYON 09-04J	9	10S	23E	NWSE	UTU37355	UTU37355	430473254100S1
SOUTHMAN CANYON 31-01-L	31	09S	23E	NWSW	UTU33433	UTU74898	430473254300S1
SOUTHMAN CANYON 31-02X	31	09S	23E	NWNW	UTU33433	UTU33433	430473489800S1
SOUTHMAN CANYON 31-03	31	09S	23E	SENE	UTU33433	UTU33433	430473472600S1
SOUTHMAN CANYON 31-04	31	09S	23E	SESW	UTU33433		430473472700S1
SOUTHMAN CANYON 923-31B	31	09S	23E	NWNE	U-33433	UTU33433	430473515000S1
SOUTHMAN CANYON 923-31J	31	09S	23E	NWSE	U-33433	UTU33433	430473514900S1
SOUTHMAN CANYON 923-31P	31	09S	23E	SESE	U-33433		430473528800S1
SOUTHMAN CANYON SWD #3	15	10S	23E	NESE	UTU-38427		430471588000S1
WHITE RIVER 1-14	14	10S	23E	NENW	UTU38427	UTU38427	430473048100S1

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. MULTIPLE WELLS- SEE ATTACHED
2. Name of Operator WESTPORT OIL & GAS COMPANY, L.P.		6. If Indian, Allottee or Tribe Name
3a. Address 1368 SOUTH 1200 EAST, VERNAL, UTAH 84078	3b. Phone No. (include area code) 435-781-7060	7. If Unit or CA/Agreement, Name and/or No. MULTIPLE WELLS- SEE ATTACHED
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) MULTIPLE WELLS- SEE ATTACHED		8. Well Name and No. MULTIPLE WELLS- SEE ATTACHED
		9. API Well No. MULTIPLE WELLS- SEE ATTACHED
		10. Field and Pool, or Exploratory Area MULTIPLE WELLS- SEE ATTACHED
		11. County or Parish, State UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input checked="" type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

WESTPORT OIL & GAS COMPANY RESCINDS ANY PREVIOUSLY APPROVED DISPOSAL SITES AND PROPOSES THAT ANY PRODUCED WATER FROM THE ATTACHED LIST OF WELLS WILL BE CONTAINED IN A WATER TANK AND WILL THEN BE HAULED BY TRUCK TO ONE OF THE FOLLOWING PRE-APPROVED DISPOSAL SITES: DALBO, INC.; RNI, SEC. 5-T9S-R22E; ACE OILFIELD, SEC. 2-T6S-R20E; SOUTHMAN CANYON #3 SWD, SEC. 15-T10S-R23E, API NO. 4304715880000S1; AND DIRTY DEVIL FEDERAL 14-10 SWD, SWC. 10-T9S-R24E, API NO. 430473056600S1.

**Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY**

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) DEBRA DOMENICI	Title ENVIRONMENTAL ASSISTANT
Signature <i>Debra Domenici</i>	Date July 12, 2004

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

JUL 14 2004

DIV. OF OIL, GAS & MINING

WELL	LEGALS				STF LEASE NO	CA NUMBER	API NO
	SEC	TWN	RGE	QTR/QTR			
BONANZA 04-06	4	10S	23E	NESW	U-33433	UTU33433	430473475100S1
BONANZA 06-02	6	10S	23E	NESW	UTU38419	UTU38419	430473484300S1
BONANZA 08-02	8	10S	23E	SESE	UTU37355	UTU37355	430473408700S1
BONANZA 08-03	8	10S	23E	NWNW	U-37355	UTU37355	430473477000S1
BONANZA 09-05	9	10S	23E	SESW	U-37355	UTU37355	430473486600S1
BONANZA 09-06	9	10S	23E	NWNE	U-37355	UTU37355	430473477100S1
BONANZA 10-02	10	10S	23E	NWNW	U72028	UTU80201	430473470400S1
BONANZA 10-03	10	10S	23E	NWNE	UTU38261	CR-5	430473472800S1
BONANZA 10-04	10	10S	23E	SENE	UTU40736	CR-5	430473477200S1
BONANZA 1023-2A	2	10S	23E	NENE	ML47062		430473534700S1
BONANZA 1023-2C	2	10S	23E	NENW	ML47062		430473534600S1
BONANZA 1023-2E	2	10S	23E	SWNW	ML47062		430473534500S1
BONANZA 1023-4E	4	10S	23E	SWNW	U-33433		430473539200S1
BONANZA 1023-6C	6	10S	23E	NENW	U-38419	UTU38419	430473515300S1
BONANZA 1023-7B	7	10S	23E	NWNE	U-38420	UTU38420	430473517200S1
BONANZA 1023-7L	7	10S	23E	NWSW	U-38420		430473528900S1
BONANZA 11-02	11	10S	23E	SWNW	UTU38425	CR-23	430473477300S1
BONANZA FEDERAL 03-15	15	10S	23E	NENW	UTU38428	UTU38428	430473127800S1
CANYON VIEW FEDERAL 1-18	18	10S	23E	SENE	UTU38421	UTU38421	430473037900S1
CIGE 008	35	09S	22E	SWSE	UTU010954A	891008900A	430473042700S1
CIGE 009	36	09S	22E	NWSE	ML22650	891008900A	430473041900S1
CIGE 010	2	10S	22E	NWSE	ML22651	891008900A	430473042500S1
CIGE 031	1	10S	22E	SWNW	U011336	891008900A	430473051100S1
CIGE 062D	36	09S	22E	NWSW	ML22650	891008900A	430473088500S1
CIGE 067A	2	10S	22E	NENE	ML22651	891008900A	430473093800S1
CIGE 068D	35	09S	22E	NWSW	UTU010954A	891008900A	430473095100S1
CIGE 089D	34	09S	22E	SENE	UTU0149077	891008900A	430473114600S1
CIGE 105D	1	10S	22E	NENW	U011336	891008900A	430473175800S1
CIGE 118	35	09S	22E	NESE	UTU010954A	891008900A	430473202500S1
CIGE 144	2	10S	22E	SWNE	ML22651	891008900A	430473202200S1
CIGE 147	36	09S	22E	SESW	ML22650	891008900A	430473202000S1
CIGE 153	35	09S	22E	SESW	UTU010954A	891008900A	430473206700S1
CIGE 161	2	10S	22E	SESE	ML22651	891008900A	430473216800S1
CIGE 162	36	09S	22E	SESE	ML22650	891008900A	430473216400S1
CIGE 186	35	09S	22E	NWSE	UTU010954A	891008900A	430473259000S1
CIGE 193	35	09S	22E	SESE	UTU010954A	891008900A	430473297300S1
CIGE 194	1	10S	22E	SWNW	U011336	891008900A	430473293200S1
CIGE 195	2	10S	22E	NWNE	ML22651	891008900A	430473279700S1
CIGE 212	34	09S	22E	NENE	UTU0149077	891008900A	430473293800S1
CIGE 221	36	09S	22E	SWSW	ML22650	891008900A	430473286800S1
CIGE 222	36	09S	22E	NESW	ML22650	891008900A	430473286900S1
CIGE 223	1	10S	22E	NWNW	U011336	891008900A	430473298300S1
CLIFF EDGE 1-15	15	10S	23E	NWSE	UTU38427	UTU38427	430473046200S1
CROOKED CYN FED 1-17	17	10S	23E	NESW	UTU37355	UTU37355	430473036900S1
FLAT MESA FEDERAL 1-7	7	10S	23E	NWSE	UTU38420	UTU38420	430473036500S1
FLAT MESA FEDERAL 2-7	7	10S	23E	SENE	UTU38420	UTU38420	430473054500S1
JACK RABBIT 1-11	11	10S	23E	SWNE	UTU38425	CR-23	430473042300S1
LOOKOUT POINT STATE 1-16	16	10S	23E	NESE	ML22186A		430473054400S1
NBU 024N2	12	10S	22E	SESE	U01197A	891008900A	430473053500S1
NBU 038N2	13	10S	22E	NWSW	U06512	891008900A	430473053600S1
NBU 1022-1G	1	10S	22E	SWNE	U-11336	891008900A	430473517500S1
NBU 922-35K	35	09S	22E	NESW	UTU-010954A	891008900A	430473512600S1
NBU 922-36I	36	09S	22E	NESE	ML-22650	891008900A	430473510700S1
NO NAME CANYON 1-9	9	10S	23E	SENE	UTU037355	UTU37355	430473037800S1
NO NAME CANYON 2-9	9	10S	23E	NENW	UTU037355	UTU37355	430473150400S1
NSO FEDERAL 1-12	12	10S	23E	NENW	UTU38423	CR-22	430473056000S1
PETE'S FLAT 1-1	1	10S	23E	NESE	UTU40736		430473055800S1
SAGE HEN FEDERAL 1-6	6	10S	23E	NESE	UTU38419	CR-3	430473038200S1
SAGEBRUSH FEDERAL 1-8	8	10S	23E	SWNE	UTU37355	UTU37355	430473038300S1
SHEEPHERDER FEDERAL 1-10	10	10S	23E	NESE	UTU38424	CR-5	430473055900S1
SOUTHMAN CANYON 01-05 FED	5	10S	23E	SENE	UTU33433	UTU74473	430473085600S1

WELL	LEGALS				STF LEASE NO	CA NUMBER	API NO
	SEC	TWN	RGE	QTR/QTR			
SOUTHMAN CANYON 04-04	4	10S	23E	NWSE	UTU33433	UTU33433	430473063200S1
SOUTHMAN CANYON 04-05	5	10S	23E	NESE	UTU33433	UTU33433	430473063300S1
SOUTHMAN CANYON 09-03M	9	10S	23E	SWSW	UTU37355	UTU37355	430473254000S1
SOUTHMAN CANYON 09-04J	9	10S	23E	NWSE	UTU37355	UTU37355	430473254100S1
SOUTHMAN CANYON 31-01-L	31	09S	23E	NWSW	UTU33433	UTU74898	430473254300S1
SOUTHMAN CANYON 31-02X	31	09S	23E	NWNW	UTU33433	UTU33433	430473489800S1
SOUTHMAN CANYON 31-03	31	09S	23E	SESW	UTU33433	UTU33433	430473472600S1
SOUTHMAN CANYON 31-04	31	09S	23E	SESW	UTU33433		430473472700S1
SOUTHMAN CANYON 923-31B	31	09S	23E	NWNE	U-33433	UTU33433	430473515000S1
SOUTHMAN CANYON 923-31J	31	09S	23E	NWSE	U-33433	UTU33433	430473514900S1
SOUTHMAN CANYON 923-31P	31	09S	23E	SESE	U-33433		430473528800S1
SOUTHMAN CANYON SWD #3	15	10S	23E	NESE	UTU-38427		430471588000S1
WHITE RIVER 1-14	14	10S	23E	NENW	UTU38427	UTU38427	430473048100S1

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. MULTIPLE WELLS- SEE ATTACHED
2. Name of Operator WESTPORT OIL & GAS COMPANY, L.P.		6. If Indian, Allottee or Tribe Name
3a. Address 1368 SOUTH 1200 EAST, VERNAL, UTAH 84078	3b. Phone No. (include area code) 435-781-7060	7. If Unit or CA/Agreement, Name and/or No. MULTIPLE WELLS- SEE ATTACHED
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) MULTIPLE WELLS- SEE ATTACHED		8. Well Name and No. MULTIPLE WELLS- SEE ATTACHED
		9. API Well No. MULTIPLE WELLS- SEE ATTACHED
		10. Field and Pool, or Exploratory Area MULTIPLE WELLS- SEE ATTACHED
		11. County or Parish, State UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input checked="" type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

Westport Oil & Gas Company rescinds any previously approved disposal sites and proposes that any produced water from the attached list of wells on Exhibit A will be contained in a water tank and will then be hauled by truck to one of the following pre-approved disposal sites: Dalbo, Inc. Disposal Pit; RNI Disposal Pit, Sec. 5-T9S-R22E; Ace Oilfield Disposal, Sec. 2-T6S-R20E; Southman Canyon #3 SWD, Sec. 15-T10S-R23E, API No. 43047158800000S1 CIGE 9 SWD, Sec. 36-T9S-R22E; and Dirty Devil Federal 14-10 SWD, Sec. 10-T9S-R24E, API No. 430473056600S1. The disposal/emergency pits for the locations listed on Exhibit B will be reclaimed within the 2004 year. The rest of the locations that have disposal/emergency pits which are listed on Exhibit C will have their pits reclaimed by September 2008.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) DEBRA DOMENICI	Title ENVIRONMENTAL ASSISTANT
Signature <i>Debra Domenici</i>	Date July 22, 2004

RECEIVED
JUL 27 2004
DIV. OF OIL, GAS & MINING

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

EXHIBIT A

WELL	LEGALS				STF LEASE NO	CA NUMBER	API NO
	SEC	TWN	RGE	QTR/QTR			
BONANZA 04-06	4	10S	23E	NESW	U-33433	UTU33433	430473475100S1
BONANZA 06-02	6	10S	23E	NESW	UTU38419	UTU38419	430473484300S1
BONANZA 08-02	8	10S	23E	SESE	UTU37355	UTU37355	430473408700S1
BONANZA 08-03	8	10S	23E	NWNW	U-37355	UTU37355	430473477000S1
BONANZA 09-05	9	10S	23E	SESW	U-37355	UTU37355	430473486600S1
BONANZA 09-06	9	10S	23E	NWNE	U-37355	UTU37355	430473477100S1
BONANZA 10-02	10	10S	23E	NWNW	U72028	UTU80201	430473470400S1
BONANZA 10-03	10	10S	23E	NWNE	UTU38261	CR-5	430473472800S1
BONANZA 10-04	10	10S	23E	SENE	UTU40736	CR-5	430473477200S1
BONANZA 1023-2A	2	10S	23E	NENE	ML47062		430473534700S1
BONANZA 1023-2C	2	10S	23E	NENW	ML47062		430473534600S1
BONANZA 1023-2E	2	10S	23E	SWNW	ML47062		430473534500S1
BONANZA 1023-4E	4	10S	23E	SWNW	U-33433		43047353920S1
BONANZA 1023-6C	6	10S	23E	NENW	U-38419	UTU38419	430473515300S1
BONANZA 1023-7B	7	10S	23E	NWNE	U-38420	UTU38420	430473477200S1
BONANZA 1023-7L	7	10S	23E	NWSW	U-38420		430473528900S1
BONANZA 11-02	11	10S	23E	SWNW	UTU38425	CR-23	430473477300S1
BONANZA FEDERAL 03-15	15	10S	23E	NENW	UTU38428	UTU38428	430473127800S1
CANYON VIEW FEDERAL 1-18	18	10S	23E	SENE	UTU38421	UTU38421	430473037900S1
CIGE 008	35	09S	22E	SWSE	UTU010954A	891008900A	430473042700S1
CIGE 009	36	09S	22E	NWSE	ML22650	891008900A	430473041900S1
CIGE 010	2	10S	22E	NWSE	ML22651	891008900A	430473042500S1
CIGE 031	1	10S	22E	SWNW	U011336	891008900A	430473051100S1
CIGE 062D	36	09S	22E	NWSW	ML22650	891008900A	430473088500S1
CIGE 067A	2	10S	22E	NENE	ML22651	891008900A	430473093800S1
CIGE 068D	35	09S	22E	NWSW	UTU010954A	891008900A	430473095100S1
CIGE 089D	34	09S	22E	SENE	UTU0149077	891008900A	430473114600S1
CIGE 105D	1	10S	22E	NENW	U011336	891008900A	430473175800S1
CIGE 118	35	09S	22E	NESE	UTU010954A	891008900A	430473202500S1
CIGE 144	2	10S	22E	SWNE	ML22651	891008900A	430473202200S1
CIGE 147	36	09S	22E	SESW	ML22650	891008900A	430473202000S1
CIGE 153	35	09S	22E	SESW	UTU010954A	891008900A	430473206700S1
CIGE 161	2	10S	22E	SESE	ML22651	891008900A	430473216800S1
CIGE 162	36	09S	22E	SESE	ML22650	891008900A	430473216400S1
CIGE 186	35	09S	22E	NWSE	UTU010954A	891008900A	430473259000S1
CIGE 193	35	09S	22E	SESE	UTU010954A	891008900A	430473297300S1
CIGE 194	1	10S	22E	SWNW	U011336	891008900A	430473293200S1
CIGE 195	2	10S	22E	NWNE	ML22651	891008900A	430473279700S1
CIGE 212	34	09S	22E	NENE	UTU0149077	891008900A	430473293800S1
CIGE 221	36	09S	22E	SWSW	ML22650	891008900A	430473286800S1
CIGE 222	36	09S	22E	NESW	ML22650	891008900A	430473286900S1
CIGE 223	1	10S	22E	NWNW	U011336	891008900A	430473298300S1
CLIFF EDGE 1-15	15	10S	23E	NWSE	UTU38427	UTU38427	430473046200S1
CROOKED CYN FED 1-17	17	10S	23E	NESW	UTU37355	UTU37355	430473036900S1
FLAT MESA FEDERAL 1-7	7	10S	23E	NWSE	UTU38420	UTU38420	430473036500S1
FLAT MESA FEDERAL 2-7	7	10S	23E	SENE	UTU38420	UTU38420	430473054500S1
JACK RABBIT 1-11	11	10S	23E	SWNE	UTU38425	CR-23	430473042300S1
LOOKOUT POINT STATE 1-16	16	10S	23E	NESE	ML22186A		430473054400S1
NBU 024N2	12	10S	22E	SESE	U01197A	891008900A	430473053500S1
NBU 038N2	13	10S	22E	NWSW	U06512	891008900A	430473053600S1
NBU 1022-1G	1	10S	22E	SWNE	U-11336	891008900A	430473517500S1
NBU 922-35K	35	09S	22E	NESW	UTU-010954A	891008900A	430473512600S1
NBU 922-36I	36	09S	22E	NESE	ML-22650	891008900A	430473510700S1
NO NAME CANYON 1-9	9	10S	23E	SENE	UTU037355	UTU37355	430473037800S1
NO NAME CANYON 2-9	9	10S	23E	NENW	UTU037355	UTU37355	430473150400S1
NSO FEDERAL 1-12	12	10S	23E	NENW	UTU38423	CR-22	430473056000S1
PETE'S FLAT 1-1	1	10S	23E	NESE	UTU40736		430473055800S1
SAGE HEN FEDERAL 1-6	6	10S	23E	NESE	UTU38419	CR-3	430473038200S1
SAGEBRUSH FEDERAL 1-8	8	10S	23E	SWNE	UTU37355	UTU37355	430473038300S1
SHEEPHERDER FEDERAL 1-10	10	10S	23E	NESE	UTU38424	CR-5	430473055900S1
SOUTHMAN CANYON 01-05 FED	5	10S	23E	SENE	UTU33433	UTU74473	430473085600S1

EXHIBIT B
PITS TO BE RECLAIMED IN 2004

WELL	LEGALS				STF LEASE NO	CA NUMBER	API NO
	SEC	TWN	RGE	QTR/QTR			
CIGE 008	35	09S	22E	SWSE	UTU010954A	891008900A	430473042700S1
CIGE 062D	36	09S	22E	NWSW	ML22650	891008900A	430473088500S1
CIGE 153	35	09S	22E	SESW	UTU010954A	891008900A	430473206700S1

EXHIBIT C
PITS TO BE RECLAIMED BY SEPTEMBER, 2008

WELL	LEGALS				STF LEASE NO	CA NUMBER	API NO
	SEC	TWN	RGE	QTR/QTR			
CIGE 008	35	09S	22E	SWSE	UTU010954A	891008900A	430473042700S1
CIGE 009	36	09S	22E	NWSE	ML22650	891008900A	430473041900S1
CIGE 010	2	10S	22E	NWSE	ML22651	891008900A	430473042500S1
CIGE 031	1	10S	22E	SWNW	U011336	891008900A	430473051100S1
CIGE 062D	36	09S	22E	NWSW	ML22650	891008900A	430473088500S1
CIGE 067A	2	10S	22E	NENE	ML22651	891008900A	430473093800S1
CIGE 068D	35	09S	22E	NWSW	UTU010954A	891008900A	430473095100S1
CIGE 089D	34	09S	22E	SENE	UTU0149077	891008900A	430473114600S1
CIGE 105D	1	10S	22E	NENW	U011336	891008900A	430473175800S1
CIGE 118	35	09S	22E	NESE	UTU010954A	891008900A	430473202500S1
CIGE 144	2	10S	22E	SWNE	ML22651	891008900A	430473202200S1
CIGE 153	35	09S	22E	SESW	UTU010954A	891008900A	430473206700S1
CIGE 161	2	10S	22E	SESE	ML22651	891008900A	430473216800S1
CIGE 162	36	09S	22E	SESE	ML22650	891008900A	430473216400S1
NBU 024N2	12	10S	22E	SESE	U01197A	891008900A	430473053500S1
NBU 038N2	13	10S	22E	NWSW	U06512	891008900A	430473053600S1

014

WELL	LEGALS				STF LEASE NO	CA NUMBER	API NO
	SEC	TWN	RGE	QTR/QTR			
SOUTHMAN CANYON 04-04	4	10S	23E	NWSE	UTU33433	UTU33433	430473063200S1
SOUTHMAN CANYON 04-05	5	10S	23E	NESE	UTU33433	UTU33433	430473063300S1
SOUTHMAN CANYON 09-03M	9	10S	23E	SWSW	UTU37355	UTU37355	430473254000S1
SOUTHMAN CANYON 09-04J	9	10S	23E	NWSE	UTU37355	UTU37355	430473254100S1
SOUTHMAN CANYON 31-01-L	31	09S	23E	NWSW	UTU33433	UTU74898	430473254300S1
SOUTHMAN CANYON 31-02X	31	09S	23E	NWNW	UTU33433	UTU33433	430473489800S1
SOUTHMAN CANYON 31-03	31	09S	23E	SESW	UTU33433	UTU33433	430473472600S1
SOUTHMAN CANYON 31-04	31	09S	23E	SESW	UTU33433		430473472700S1
SOUTHMAN CANYON 923-31B	31	09S	23E	NWNE	U-33433	UTU33433	430473515000S1
SOUTHMAN CANYON 923-31J	31	09S	23E	NWSE	U-33433	UTU33433	430473514900S1
SOUTHMAN CANYON 923-31P	31	09S	23E	SESE	U-33433		430473528800S1
SOUTHMAN CANYON SWD #3	15	10S	23E	NESE	UTU-38427		430471588000S1
WHITE RIVER 1-14	14	10S	23E	NENW	UTU38427	UTU38427	430473048100S1

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING

1. DJJ
2. CDW

X Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

1/6/2006

FROM: (Old Operator): N2115-Westport Oil & Gas Co., LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024	TO: (New Operator): N2995-Kerr-McGee Oil & Gas Onshore, LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024
---	--

WELL NAME	CA No.	Unit:	SEC TWN RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
-----------	--------	-------	-------------	--------	-----------	------------	-----------	-------------

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 5/10/2006
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 5/10/2006
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- If **NO**, the operator was contacted on: _____
- (R649-9-2)Waste Management Plan has been received on: IN PLACE
- Inspections of LA PA state/fee well sites complete on: n/a
- Reports current for Production/Disposition & Sundries on: ok
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 3/27/2006 BIA not yet
- Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: 3/27/2006
- Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: n/a
- Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: _____

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 5/15/2006
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 5/15/2006
- Bond information entered in RBDMS on: 5/15/2006
- Fee/State wells attached to bond in RBDMS on: 5/16/2006
- Injection Projects to new operator in RBDMS on: _____
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a Name Change Only

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: CO1203
- Indian well(s) covered by Bond Number: RLB0005239
- (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0005236
- The **FORMER** operator has requested a release of liability from their bond on: n/a rider added KMG
The Division sent response by letter on: _____

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 5/16/2006

COMMENTS:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
KERR-McGEE OIL & GAS ONSHORE LP

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEE ATTACHED

5. Lease Serial No.
MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State
UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

PLEASE BE ADVISED THAT KERR-McGEE OIL & GAS ONSHORE LP, IS CONSIDERED TO BE THE OPERATOR OF THE ATTACHED WELL LOCATIONS. EFFECTIVE JANUARY 6, 2006.
 KERR-McGEE OIL & GAS ONSHORE LP, IS RESPONSIBLE UNDER TERMS AND CONDITIONS OF THE LEASE(S) FOR THE OPERATIONS CONDUCTED UPON LEASE LANDS. BOND COVERAGE IS PROVIDED BY STATE OF UTAH NATIONWIDE BOND NO. RLB0005237.

RECEIVED

MAY 10 2006

DIV. OF OIL, GAS & MINING

*BLM BOND = C01203
 BIA BOND = RLB0005239*

APPROVED 5116106

Earlene Russell

**Division of Oil, Gas and Mining
 Earlene Russell, Engineering Technician**

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) RANDY BAYNE	Title DRILLING MANAGER
Signature <i>Randy Bayne</i>	Date May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

5. Lease Serial No.
MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State
UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY L.P.

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEE ATTACHED

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

EFFECTIVE JANUARY 6, 2006, WESTPORT OIL & GAS COMPANY L.P., HAS RELINQUISHED THE OPERATORSHIP OF THE ATTACHED WELL LOCATIONS TO KERR-McGEE OIL & GAS ONSHORE LP.

APPROVED 5/16/06
Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

RECEIVED
MAY 10 2006

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) BRAD LANEY	Title ENGINEERING SPECIALIST
Signature <i>Brad Laney</i>	Date May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by <i>Brad Laney</i>	Title	Date 5-9-06
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT
Colorado State Office
2850 Youngfield Street
Lakewood, Colorado 80215-7076

IN REPLY REFER TO:

CO922 (MM)
3106
COC017387 et. al.

March 23, 2006

NOTICE

Kerr-McGee Oil & Gas Onshore L.P. :
1999 Broadway, Suite 3700 : Oil & Gas
Denver, CO 80202 :

Merger/Name Change - Recognized

On February 28, 2006 this office received acceptable evidence of the following mergers and name conversion:

Kerr-McGee Oil & Gas Onshore L.P., a Delaware Limited Partnership, and Kerr-McGee Oil & Gas Onshore LLC, a Delaware Limited Partnership merger with and into Westport Oil and Gas Company L.P., a Delaware Limited Partnership, and subsequent Westport Oil & Gas Company L.P. name conversion to Kerr-McGee Oil & Gas Onshore L.P.

For our purposes the merger and name conversion was effective January 4, 2006, the date the Secretary of State of Delaware authenticated the mergers and name conversion.

Kerr-McGee Oil & Gas Onshore L.P. provided a list of oil and gas leases held by the merging parties with the request that the Bureau of Land Management change all their lease records from the named entities to the new entity, Kerr-McGee Oil & Gas Onshore L.P. In response to this request each state is asked to retrieve their own list of leases in the names of these entities from the Bureau of Land Management's (BLM) automated LR2000 data base.

The oil and gas lease files identified on the list provided by Kerr-McGee Oil & Gas Onshore L.P. have been updated as to the merger and name conversion. We have not abstracted the lease files to determine if the entities affected by the acceptance of these documents holds an interest in the lease, nor have we attempt to identify leases where the entity is the operator on the ground that maintains vested record title or operating rights interests. If additional documentation, for change of operator, is required you will be contacted directly by the appropriate Field Office. The Mineral Management Services (MMS) and other applicable BLM offices were notified of the merger with a copy of this notice

Please contact this office if you identify additional leases where the merging party maintains an interest, under our jurisdiction, and we will document the case files with a copy of this notice. If the leases are under the jurisdiction of another State Office that information will be forwarded to them for their action.

Three riders accompanied the merger/name conversion documents which will add Kerr-McGee Oil and Gas Onshore LLC as a principal to the 3 Kerr-McGee bonds maintained by the Wyoming State Office. These riders will be forward to them for their acceptance.

The Nationwide Oil & Gas Continental Casualty Company Bond #158626364 (BLM Bond #CO1203), maintained by the Colorado State Office, will remain in full force and effect until an assumption rider is accepted by the Wyoming State Office that conditions their Nationwide Safeco bond to accept all outstanding liability on the oil and gas leases attached to the Colorado bond.

If you have questions about this action you may call me at 303.239.3768.

/s/Martha L. Maxwell
Martha L. Maxwell
Land Law Examiner
Fluid Minerals Adjudication

Attachment:

List of OG Leases to each of the following offices:

MMS MRM, MS 357B-1

WY, UT, NM/OK/TX, MT/ND, WY State Offices

CO Field Offices

Wyoming State Office

Rider #1 to Bond WY2357

Rider #2 to Bond WY1865

Rider #3 to Bond WY1127



United States Department of the Interior



BUREAU OF LAND MANAGEMENT
Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155
<http://www.blm.gov>

IN REPLY REFER TO:
3106
(UT-922)

March 27, 2006

Memorandum

To: Vernal Field Office

From: Chief, Branch of Fluid Minerals

Subject: Merger Approval

Attached is an approved copy of the merger recognized by the Bureau of Land Management, Colorado State Office. We have updated our records to reflect the merger from Westport Oil and Gas Company L.P. into Kerr-McGee Onshore Oil and Gas Company. The merger was approved effective January 4, 2006.

Chief, Branch of
Fluid Minerals

Enclosure

Approval letter from BLM COSO (2 pp)

cc: MMS, Reference Data Branch, James Sykes, PO Box 25165, Denver CO 80225
State of Utah, DOGM, Attn: Earlene Russell, PO Box 145801, SLC UT 84114
Teresa Thompson
Joe Incardine
Connie Seare
Dave Mascarenas
Susan Bauman

RECEIVED

MAR 28 2006

U.S. DEPT. OF THE INTERIOR

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
U-33433

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
SOUTHMAN CANYON 923-31J

9. API Well No.
4304735149

10. Field and Pool, or Exploratory Area
UNDESIGNATED

11. County or Parish, State
UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
KERR-McGEE OIL & GAS ONSHORE LP

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
NWSE SEC. 31, T9S, R23E 1936'FSL, 2075'FEL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other MAINTENANCE

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

A MAINTENANCE WORK WAS PERFORMED ON THE SUBJECT WELL LOCATION.

PLEASE REFER TO THE ATTACHED CHRONOLOGICAL WELL HISTORY.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

Sheila Upchego

Title

Regulatory Analyst

Signature



Date

November 1, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

NOV 07 2006

(Instructions on reverse)

DIV. OF OIL, GAS & MINING

KERR MCGEE OIL & GAS ONSHORE LP

CHRONOLOGICAL HISTORY

SOUTHMAN CANYON 923-31J

Page 1

UINTAH COUNTY, UT

- 08/31/06** PROG: 7AM (DAY 1) J.S.A.#1
RDMO DIABLO 924-31C. ROAD RIG TO SOUTHMAN CYN 923-31J. FOUND WELL SHUT IN. SICP=800, SIATP=800. OPEN WELL TO SALES. MIRU, SPOT EQUIPMENT. BLEW WELL DOWN. KILL WELL DN TBG W/ 40 BBLs 2% KCL WATER. NDWH, NUBOP. R/U FLOOR & TBG EQUIPMENT. UNLAND TBG & L/D HANGER. POOH STANDING BACK 2-3/8" J-55 TBG. L/D BTM 8 JTS W/ HVY SCALE ON O.D. OF TBG. NORM READING OF 45. ACID WILL NOT EAT SCALE. P/U 3-7/8" RBS MILL, POBS W/ R NIPPLE & RIH ON 2-3/8" J-55 TBG. EOT @ 2000'. BRAKES FAILED THAT CONTROL BLOCKS, CAUSING BLOCKS TO FALL LANDING ON FLOOR & BENDING TBG IN BOP. CALL FOR CRANE. MIRU J & C CRANE SERV. MOVE BLOCKS OFF FLOOR & LIFT UP ON TBG. FOUND TBG HAD PARTED & DROPPED DN HOLE. (PBT @ 8894') L/D TOP PARTED JT . RDMO J&C CRANE.LTR=50 BBLs.
8 PM LEAVE WELL OPEN TO SALES. SHUT DN FOR NIGHT. INVESTIGATE ACCIDENT IN AM.
- 09/01/06** PROG: SECURED WELL FOR WEEKEND. W/O RIG REPAIR. (LEED 698 RIG)
- 09/05/06** PROG: 7AM (DAY 3)

LAY DOWN 84 STANDS 2-3/8" TBG ON GROUND W/ SILLS UNDER TBG. R/D DERRICK. WORK ON REPLACING TOP SHEAVES ON DERRICK. N/C FROM LEED.NEW SHEAVES SHOULD BE ON FREIGHT IN AM.
- 09/06/06** LOE: REPLACE BAD TBG, C/O WELLBORE
PROG: W/O RIG
- 09/07/06** PROG: 7AM [DAY 5] HELD SAFETY MTG.

REPLACE CROWN SHEAVES. R/U RIG. INSTALL NEW DRILL LINE & INSPECTED BLOCKS. FCP=80#. KILL WELL W/ 60 BBLs 2% KCL WATER. NDBOP, N/U NEW BOP. SENT OLD BOP TO TOWN FOR REPAIR & INSPECTION. P/U SHOE, SKIRTED MILL, 1 COLLAR,BUMPER SUB, JARS, 3 COLLARS, CHANGE OVER & 40 JTS NEW 2-3/8" N-80 TBG {WORK STRING} & RIH. {SLM} TBG WAS DRIFTED. EOT @ 1600'.
- 09/08/06** PROG: 7AM [DAY 6] J.S.A.#6

FISHING 2290' OF 2-3/8" J-55 TBG W/ RBS MILL & POBS W/ R NIPPLE AT EOT.
SITP=0#, SICP=0#.WORK STRING EOT @ 1600'. CONTINUE P/U 2-3/8" N-80 TBG & RIH. (SLM) TBG WAS DRIFTED. TAG FISH TOP @ 5648'. R/U SWVL & WTFRD FOAM UNIT. ESTABLISH CIRCULATION IN 55 MIN. DRILL & CLEAN UP FISH TOP TO 5650'+-. KILL TBG W/ 50 BBLs 2% KCL. POOH STANDING BACK TBG. L/D B.H.A.

P/U O.S. BOWEN LBS, BOWEN JAR, 4 DRILL COLLARS, BOWEN INTENSIFIER,
XO SUB, 2-3/8" X 6' PUP JT & RIH ON 2-3/8" N-80 TBG FROM DERRICK. EOT
@ 2600'
PMP'D 150 BBLs. RCVR'D 50 BBLs. LTR=100 BBLs.

- 09/11/06 PROG: RIH W/ OVERSHOT TAG FISH TOP @ 5650'. WORK OVER FISH & LATCH ON.
JAR ONE TIME ON FISH. POOH. STAND DC BACK. PULL & LAY DOWN FISH. RIH W/
DC, PULL & LAY DOWN DC & FISHING TOOLS. MAKE UP BIT RIH TO 5400' SDFN.
- 09/12/06 PROG: 7AM [DAY 8] J.S.A.#5. EOT @ 4600'. SICP=500#. BLEW WELL DOWN. RIH ON 2-
3/8" N-80 TBG. (SLM) TBG WAS DRIFTED. TAG FILL @ 8009'. INSTALL STRING
FLOAT. R/U SWVL & FOAM UNIT. ESTABLISH CIRCULATION IN 1.5 HRS. DRILL &
C/O 203' SCALE TO 8212.12'.LAST 2 JTS DRILLED REALLY HARD. CIRCULATE
WELL CLEAN.KILL TBG W/ 10 BBLs 2% KCL R/D SWVL & FOAM UNIT. POOH & L/D
WORK STRING. RETREIVE STRING FLOAT. EOT @ 5400'. REPLACE DRLG RUBBER.
LTR=245 BBLs.
- 5:30 PM LEAVE WELL OPEN TO SALES. PREP TO FINISH L/D WORK STRING IN AM &
P/U& RIH W/ PRODUCTION STRING & LAND TBG.
- 09/13/06 PROG: 7AM [DAY 9] J.S.A. #2. EOT @ 5400'. FCP=100#. WELL MADE 138 BBLs WATER
OVERNIGHT.KILL WELL W/ 30 BBLs 2% KCL. CONTINUE POOH & L/D 2-3/8" N-80
WORK STRING. L/D B.H.A. P/U FAST EDDIE "R" NIPPLE, 33 JTS 2-3/8" J-55 USED TBG
FROM GROUND.(SLM) P/U 82 STANDS 2-3/8" YELL/BND J-55 TBG FROM GROUND &
RIH. (SLM) TBG WAS DRIFTED.PUMPED 150 BBLs THROUGH OUT DAY TO CONTROL
WELL. LTR=0 BBLs. EOT @ 6437'. 6 PM LEAVE WELL OPEN TO SALES. SDFN
PREP TO LAND TBG, BROACH & PICKLE TBG IN AM.
- 09/14/06 PROG: 7AM (DAY 10) J.S.A.#5. FOUND WELL HAD SHUT IN OVERNIGHT. SITP=500#,
SICP=500#. BLEW WELL DOWN. KILL TBG W/ 50 BBLs T.P.W. P/U 2-3/8" YELL/BND J-
55 TBG FROM TRAILER & RIH. LAND TBG ON HANGER W/ 243 JTS 2-3/8" YELL/BND J-
55 TBG. EOT @ 7899.38' & R NIPPLE @ 7897.96'. TBG WAS BROACHED. MIRU
NALCO. PMP 5 BBL PAD, 1 BBL ACID BLEND & CHASE W/ 31 BBLs T.P.W. SLOWLY
TO EOT. RDMO NALCO. NDBOP, NUWH. SWI TO BUILD PRESSURE. LTR=87 BBLs.
RACK EQUIPMENT. TO WINDY TO RIG DOWN. PREP TO MOVE TO MULLIGAN 822-
24H IN AM.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: KERR MCGEE OIL & GAS ONSHORE LP Operator Account Number: N 2995
 Address: P.O. Box 173779
city DENVER
state CO zip 80217 Phone Number: (720) 929-6029

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
See Atchmt	See Atchmt						
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
	99999	18519				5/11/2012	
Comments: Please see attachment with list of Wells in the Ponderosa Unit. <u>W5MVD</u>							5/30/2012

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
Comments:							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
Comments:							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

RECEIVED

MAY 21 2012

Cara Mahler

Name (Please Print)

Signature

REGULATORY ANALYST

5/21/2012

Title

Date

well_name	sec	twp	rng	api	entity	lease	well	stat	qtr_qtr	bhl	surf	zone	a_stat	l_num	op_no
SOUTHMAN CANYON 31-3	31	090S	230E	4304734726	13717	1	GW	P	SENW		1	WSMVD	P	U-33433	N2995
SOUTHMAN CANYON 31-4	31	090S	230E	4304734727	13742	1	GW	S	SESW		1	WSMVD	S	UTU-33433	N2995
SOUTHMAN CYN 31-2X (RIG SKID)	31	090S	230E	4304734898	13755	1	GW	P	NWNW		1	WSMVD	P	U-33433	N2995
SOUTHMAN CYN 923-31J	31	090S	230E	4304735149	13994	1	GW	P	NWSE		1	MVRD	P	U-33433	N2995
SOUTHMAN CYN 923-31B	31	090S	230E	4304735150	13953	1	GW	P	NWNE		1	MVRD	P	U-33433	N2995
SOUTHMAN CYN 923-31P	31	090S	230E	4304735288	14037	1	GW	P	SESE		1	WSMVD	P	UTU-33433	N2995
SOUTHMAN CYN 923-31H	31	090S	230E	4304735336	14157	1	GW	P	SENE		1	WSMVD	P	U-33433	N2995
SOUTHMAN CYN 923-31O	31	090S	230E	4304737205	16827	1	GW	P	SWSE		1	MVRD	P	UTU-33433	N2995
SOUTHMAN CYN 923-31K	31	090S	230E	4304737206	16503	1	GW	P	NESW		1	WSMVD	P	UTU-33433	N2995
SOUTHMAN CYN 923-31G	31	090S	230E	4304737208	16313	1	GW	P	SWNE		1	WSMVD	P	UTU-33433	N2995
SOUTHMAN CYN 923-31E	31	090S	230E	4304737209	16521	1	GW	P	SWNW		1	WSMVD	P	UTU-33433	N2995
SOUTHMAN CYN 923-31A	31	090S	230E	4304737210	16472	1	GW	P	NENE		1	WSMVD	P	UTU-33433	N2995
SOUTHMAN CYN 923-31C	31	090S	230E	4304737227	16522	1	GW	P	NENW		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-1G	01	100S	230E	4304735512	14458	1	GW	P	SWNE		1	WSMVD	P	U-40736	N2995
BONANZA 1023-1A	01	100S	230E	4304735717	14526	1	GW	P	NENE		1	WSMVD	P	U-40736	N2995
BONANZA 1023-1E	01	100S	230E	4304735745	14524	1	GW	P	SWNW		1	WSMVD	P	U-40736	N2995
BONANZA 1023-1C	01	100S	230E	4304735754	14684	1	GW	P	NENW		1	MVRD	P	U-40736	N2995
BONANZA 1023-1K	01	100S	230E	4304735755	15403	1	GW	P	NESW		1	MVRD	P	U-38423	N2995
BONANZA 1023-1F	01	100S	230E	4304737379	16872	1	GW	P	SENW		1	MVRD	P	UTU-40736	N2995
BONANZA 1023-1B	01	100S	230E	4304737380	16733	1	GW	P	NWNE		1	MVRD	P	UTU-40736	N2995
BONANZA 1023-1D	01	100S	230E	4304737381	16873	1	GW	P	NWNW		1	MVRD	P	UTU-40736	N2995
BONANZA 1023-1H	01	100S	230E	4304737430	16901	1	GW	P	SENE		1	MVRD	P	UTU-40736	N2995
BONANZA 1023-1L	01	100S	230E	4304738300	16735	1	GW	P	NWSW		1	MVRD	P	UTU-38423	N2995
BONANZA 1023-1J	01	100S	230E	4304738302	16871	1	GW	P	NWSE		1	MVRD	P	UTU-40736	N2995
BONANZA 1023-1I	01	100S	230E	4304738810	16750	1	GW	P	NESE		1	MVRD	P	UTU-40736	N2995
BONANZA 1023-2E	02	100S	230E	4304735345	14085	3	GW	P	SWNW		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2C	02	100S	230E	4304735346	14084	3	GW	P	NENW		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2A	02	100S	230E	4304735347	14068	3	GW	P	NENE		3	MVRD	P	ML-47062	N2995
BONANZA 1023-2G	02	100S	230E	4304735661	14291	3	GW	P	SWNE		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2O	02	100S	230E	4304735662	14289	3	GW	P	SWSE		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2I	02	100S	230E	4304735663	14290	3	GW	S	NESE		3	WSMVD	S	ML-47062	N2995
BONANZA 1023-2MX	02	100S	230E	4304736092	14730	3	GW	P	SWSW		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2H	02	100S	230E	4304737093	16004	3	GW	P	SENE		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2D	02	100S	230E	4304737094	15460	3	GW	P	NWNW		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2B	02	100S	230E	4304737095	15783	3	GW	P	NWNE		3	MVRD	P	ML-47062	N2995
BONANZA 1023-2P	02	100S	230E	4304737223	15970	3	GW	P	SESE		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2N	02	100S	230E	4304737224	15887	3	GW	P	SESW		3	MVRD	P	ML-47062	N2995
BONANZA 1023-2L	02	100S	230E	4304737225	15833	3	GW	P	NWSW		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2F	02	100S	230E	4304737226	15386	3	GW	P	SENW		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2D-4	02	100S	230E	4304738761	16033	3	GW	P	NWNW		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2O-1	02	100S	230E	4304738762	16013	3	GW	P	SWSE		3	WSMVD	P	ML-47062	N2995
BONANZA 1023-2H3CS	02	100S	230E	4304750344	17426	3	GW	P	NWNE	D	3	MVRD	P	ML 47062	N2995
BONANZA 1023-2G3BS	02	100S	230E	4304750345	17428	3	GW	P	NWNE	D	3	MVRD	P	ML 47062	N2995
BONANZA 1023-2G2CS	02	100S	230E	4304750346	17429	3	GW	P	NWNE	D	3	MVRD	P	ML 47062	N2995
BONANZA 1023-2G1BS	02	100S	230E	4304750347	17427	3	GW	P	NWNE	D	3	MVRD	P	ML 47062	N2995

BONANZA 1023-2M1S	02	100S	230E	4304750379	17443	3	GW	P	SENW	D	3	MVRD	P	ML 47062	N2995
BONANZA 1023-2L2S	02	100S	230E	4304750380	17444	3	GW	P	SENW	D	3	MVRD	P	ML 47062	N2995
BONANZA 1023-2K4S	02	100S	230E	4304750381	17446	3	GW	P	SENW	D	3	MVRD	P	ML 47062	N2995
BONANZA 1023-2K1S	02	100S	230E	4304750382	17445	3	GW	P	SENW	D	3	WSMVD	P	ML 47062	N2995
BONANZA 4-6 *	04	100S	230E	4304734751	13841	1	GW	P	NESW		1	MNCS	P	UTU-33433	N2995
BONANZA 1023-4A	04	100S	230E	4304735360	14261	1	GW	P	NENE		1	WSMVD	P	U-33433	N2995
BONANZA 1023-4E	04	100S	230E	4304735392	14155	1	GW	P	SWNW		1	WSMVD	P	U-33433	N2995
BONANZA 1023-4C	04	100S	230E	4304735437	14252	1	GW	P	NENW		1	WSMVD	P	U-33433	N2995
BONANZA 1023-4M	04	100S	230E	4304735629	14930	1	GW	P	SWSW		1	WSMVD	P	U-33433	N2995
BONANZA 1023-4O	04	100S	230E	4304735688	15111	1	GW	P	SWSE		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-4I	04	100S	230E	4304735689	14446	1	GW	P	NESE		1	MVRD	P	UTU-33433	N2995
BONANZA 1023-4G	04	100S	230E	4304735746	14445	1	GW	P	SWNE		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-4D	04	100S	230E	4304737315	16352	1	GW	P	NWNW		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-4H	04	100S	230E	4304737317	16318	1	GW	P	SENE		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-4B	04	100S	230E	4304737328	16351	1	GW	P	NWNE		1	MVRD	P	UTU-33433	N2995
BONANZA 1023-4L	04	100S	230E	4304738211	16393	1	GW	P	NWSW		1	MVRD	P	UTU-33433	N2995
BONANZA 1023-4P	04	100S	230E	4304738212	16442	1	GW	P	SESE		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-4N	04	100S	230E	4304738303	16395	1	GW	P	SESW		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-4FX (RIGSKID)	04	100S	230E	4304739918	16356	1	GW	P	SENW		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-5O	05	100S	230E	4304735438	14297	1	GW	P	SWSE		1	WSMVD	P	U-33433	N2995
BONANZA 1023-5AX (RIGSKID)	05	100S	230E	4304735809	14243	1	GW	P	NENE		1	WSMVD	P	U-33433	N2995
BONANZA 1023-5C	05	100S	230E	4304736176	14729	1	GW	P	NENW		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-5G	05	100S	230E	4304736177	14700	1	GW	P	SWNE		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-5M	05	100S	230E	4304736178	14699	1	GW	P	SWSW		1	WSMVD	P	UTU-73450	N2995
BONANZA 1023-5K	05	100S	230E	4304736741	15922	1	GW	P	NESW		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-5B	05	100S	230E	4304737318	16904	1	GW	P	NWNE		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-5E	05	100S	230E	4304737319	16824	1	GW	P	SWNW		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-5H	05	100S	230E	4304737320	16793	1	GW	P	SENE		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-5N	05	100S	230E	4304737321	16732	1	GW	P	SESW		1	WSMVD	P	UTU-73450	N2995
BONANZA 1023-5L	05	100S	230E	4304737322	16825	1	GW	P	NWSW		1	MVRD	P	UTU-33433	N2995
BONANZA 1023-5J	05	100S	230E	4304737428	17055	1	GW	P	NWSE		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-5P	05	100S	230E	4304738213	16795	1	GW	P	SESE		1	MVRD	P	UTU-33433	N2995
BONANZA 1023-5N-1	05	100S	230E	4304738911	17060	1	GW	P	SESW		1	WSMVD	P	UTU-73450	N2995
BONANZA 1023-5PS	05	100S	230E	4304750169	17323	1	GW	P	NESE	D	1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-5G2AS	05	100S	230E	4304750486	17459	1	GW	P	SWNE	D	1	MVRD	P	UTU 33433	N2995
BONANZA 1023-5G2CS	05	100S	230E	4304750487	17462	1	GW	P	SWNE	D	1	MVRD	P	UTU 33433	N2995
BONANZA 1023-5G3BS	05	100S	230E	4304750488	17461	1	GW	P	SWNE	D	1	MVRD	P	UTU 33433	N2995
BONANZA 1023-5G3CS	05	100S	230E	4304750489	17460	1	GW	P	SWNE	D	1	MVRD	P	UTU 33433	N2995
BONANZA 1023-5N4AS	05	100S	230E	4304752080	18484	1	GW	DRL	SWSW	D	1	WSMVD	DRL	UTU73450	N2995
BONANZA 1023-8C2DS	05	100S	230E	4304752081	18507	1	GW	DRL	SWSW	D	1	WSMVD	DRL	UTU37355	N2995
BONANZA 6-2	06	100S	230E	4304734843	13796	1	GW	TA	NESW		1	WSMVD	TA	UTU-38419	N2995
BONANZA 1023-6C	06	100S	230E	4304735153	13951	1	GW	P	NENW		1	MVRD	P	U-38419	N2995
BONANZA 1023-6E	06	100S	230E	4304735358	14170	1	GW	P	SWNW		1	MVRD	P	U-38419	N2995
BONANZA 1023-6M	06	100S	230E	4304735359	14233	1	GW	P	SWSW		1	WSMVD	P	U-38419	N2995
BONANZA 1023-6G	06	100S	230E	4304735439	14221	1	GW	P	SWNE		1	WSMVD	P	UTU-38419	N2995
BONANZA 1023-6O	06	100S	230E	4304735630	14425	1	GW	TA	SWSE		1	WSMVD	TA	U-38419	N2995

* not moved in unit

BONANZA 1023-6A	06	100S	230E	4304736067	14775			1	GW	P	NENE		1	WSMVD	P	U-33433	N2995
BONANZA 1023-6N	06	100S	230E	4304737211	15672			1	GW	P	SESW		1	WSMVD	P	UTU-38419	N2995
BONANZA 1023-6L	06	100S	230E	4304737212	15673			1	GW	P	NWSW		1	WSMVD	P	UTU-38419	N2995
BONANZA 1023-6J	06	100S	230E	4304737213	15620			1	GW	P	NWSE		1	WSMVD	P	UTU-38419	N2995
BONANZA 1023-6F	06	100S	230E	4304737214	15576			1	GW	TA	SENW		1	WSMVD	TA	UTU-38419	N2995
BONANZA 1023-6P	06	100S	230E	4304737323	16794			1	GW	P	SESE		1	WSMVD	P	UTU-38419	N2995
BONANZA 1023-6H	06	100S	230E	4304737324	16798			1	GW	S	SENE		1	WSMVD	S	UTU-33433	N2995
BONANZA 1023-6D	06	100S	230E	4304737429	17020			1	GW	P	NWNW		1	WSMVD	P	UTU-38419	N2995
BONANZA 1023-6B	06	100S	230E	4304740398	18291			1	GW	P	NWNE		1	WSMVD	P	UTU-33433	N2995
BONANZA 1023-6M1BS	06	100S	230E	4304750452	17578			1	GW	P	NWSW	D	1	WSMVD	P	UTU 38419	N2995
BONANZA 1023-6N1AS	06	100S	230E	4304750453	17581			1	GW	P	NWSW	D	1	WSMVD	P	UTU 38419	N2995
BONANZA 1023-6N1CS	06	100S	230E	4304750454	17580			1	GW	P	NWSW	D	1	WSMVD	P	UTU 38419	N2995
BONANZA 1023-6N4BS	06	100S	230E	4304750455	17579			1	GW	P	NWSW	D	1	WSMVD	P	UTU 38419	N2995
BONANZA 1023-6I2S	06	100S	230E	4304750457	17790			1	GW	P	NESE	D	1	WSMVD	P	UTU 38419	N2995
BONANZA 1023-6I4S	06	100S	230E	4304750458	17792			1	GW	P	NESE	D	1	WSMVD	P	UTU 38419	N2995
BONANZA 1023-6J3S	06	100S	230E	4304750459	17791			1	GW	P	NESE	D	1	WSMVD	P	UTU 38419	N2995
BONANZA 1023-6P1S	06	100S	230E	4304750460	17793			1	GW	P	NESE	D	1	WSMVD	P	UTU 38419	N2995
BONANZA 1023-6A2CS	06	100S	230E	4304751430	18292			1	GW	P	NWNE	D	1	WSMVD	P	UTU33433	N2995
BONANZA 1023-6B4BS	06	100S	230E	4304751431	18293			1	GW	P	NWNE	D	1	WSMVD	P	UTU33433	N2995
BONANZA 1023-6B4CS	06	100S	230E	4304751432	18294			1	GW	P	NWNE	D	1	WSMVD	P	UTU33433	N2995
BONANZA 1023-6C4BS	06	100S	230E	4304751449	18318			1	GW	P	NENW	D	1	WSMVD	P	UTU38419	N2995
BONANZA 1023-6D1DS	06	100S	230E	4304751451	18316			1	GW	P	NENW	D	1	WSMVD	P	UTU38419	N2995
FLAT MESA FEDERAL 2-7	07	100S	230E	4304730545	18244			1	GW	S	NENW		1	WSMVD	S	U-38420	N2995
BONANZA 1023-7B	07	100S	230E	4304735172	13943			1	GW	P	NWNE		1	MVRD	P	U-38420	N2995
BONANZA 1023-7L	07	100S	230E	4304735289	14054			1	GW	P	NWSW		1	WSMVD	P	U-38420	N2995
BONANZA 1023-7D	07	100S	230E	4304735393	14171			1	GW	P	NWNW		1	WSMVD	P	U-38420	N2995
BONANZA 1023-7P	07	100S	230E	4304735510	14296			1	GW	P	SESE		1	WSMVD	P	U-38420	N2995
BONANZA 1023-7H	07	100S	230E	4304736742	15921			1	GW	P	SENE		1	WSMVD	P	UTU-38420	N2995
BONANZA 1023-7NX (RIGSKID)	07	100S	230E	4304736932	15923			1	GW	P	SESW		1	WSMVD	P	UTU-38420	N2995
BONANZA 1023-7M	07	100S	230E	4304737215	16715			1	GW	P	SWSW		1	WSMVD	P	UTU-38420	N2995
BONANZA 1023-7K	07	100S	230E	4304737216	16714			1	GW	P	NESW		1	WSMVD	P	UTU-38420	N2995
BONANZA 1023-7E	07	100S	230E	4304737217	16870			1	GW	P	SWNW		1	WSMVD	P	UTU-38420	N2995
BONANZA 1023-7G	07	100S	230E	4304737326	16765			1	GW	P	SWNE		1	WSMVD	P	UTU-38420	N2995
BONANZA 1023-7A	07	100S	230E	4304737327	16796			1	GW	P	NENE		1	WSMVD	P	UTU-38420	N2995
BONANZA 1023-7O	07	100S	230E	4304738304	16713			1	GW	P	SWSE		1	MVRD	P	UTU-38420	N2995
BONANZA 1023-7B-3	07	100S	230E	4304738912	17016			1	GW	P	NWNE		1	WSMVD	P	UTU-38420	N2995
BONANZA 1023-07JT	07	100S	230E	4304739390	16869			1	GW	P	NWSE		1	WSMVD	P	UTU-38420	N2995
BONANZA 1023-7J2AS	07	100S	230E	4304750474	17494			1	GW	P	NWSE	D	1	WSMVD	P	UTU 38420	N2995
BONANZA 1023-7J2DS	07	100S	230E	4304750475	17495			1	GW	P	NWSE	D	1	WSMVD	P	UTU 38420	N2995
BONANZA 1023-7L3DS	07	100S	230E	4304750476	17939			1	GW	P	NWSW	D	1	WSMVD	P	UTU 38420	N2995
BONANZA 1023-7M2AS	07	100S	230E	4304750477	17942			1	GW	P	NWSW	D	1	WSMVD	P	UTU 38420	N2995
BONANZA 1023-7N2AS	07	100S	230E	4304750478	17940			1	GW	P	NWSW	D	1	WSMVD	P	UTU 38420	N2995
BONANZA 1023-7N2DS	07	100S	230E	4304750479	17941			1	GW	P	NWSW	D	1	WSMVD	P	UTU 38420	N2995
BONANZA 1023-7O4S	07	100S	230E	4304750480	17918			1	GW	P	SESE	D	1	WSMVD	P	UTU 38420	N2995
BONANZA 1023-7P2S	07	100S	230E	4304750482	17919			1	GW	P	SESE	D	1	WSMVD	P	UTU 38420	N2995
BONANZA 8-2	08	100S	230E	4304734087	13851			1	GW	P	SESE		1	MVRD	P	U-37355	N2995

BONANZA 8-3	08	100S	230E	4304734770	13843			1	GW	P	NWNW			1	MVRD	P	U-37355	N2995
BONANZA 1023-8A	08	100S	230E	4304735718	14932			1	GW	P	NENE			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8L	08	100S	230E	4304735719	14876			1	GW	P	NWSW			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8N	08	100S	230E	4304735720	15104			1	GW	P	SESW			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8F	08	100S	230E	4304735989	14877			1	GW	S	SENW			1	WSMVD	S	UTU-37355	N2995
BONANZA 1023-8I	08	100S	230E	4304738215	16358			1	GW	P	NESE			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8K	08	100S	230E	4304738216	16354			1	GW	P	NESW			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8M	08	100S	230E	4304738217	16564			1	GW	P	SWSW			1	MVRD	P	UTU-37355	N2995
BONANZA 1023-8G	08	100S	230E	4304738218	16903			1	GW	P	SWNE			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8E	08	100S	230E	4304738219	16397			1	GW	P	SWNW			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8C	08	100S	230E	4304738220	16355			1	GW	P	NENW			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8B	08	100S	230E	4304738221	16292			1	GW	P	NWNE			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8H	08	100S	230E	4304738222	16353			1	GW	P	SENE			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8O	08	100S	230E	4304738305	16392			1	GW	P	SWSE			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8B-4	08	100S	230E	4304738914	17019			1	GW	P	NWNE			1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-8A1DS	08	100S	230E	4304750481	17518			1	GW	P	NENE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8A4BS	08	100S	230E	4304750483	17519			1	GW	P	NENE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8B1AS	08	100S	230E	4304750484	17520			1	GW	P	NENE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8B2AS	08	100S	230E	4304750485	17521			1	GW	P	NENE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8O2S	08	100S	230E	4304750495	17511			1	GW	P	NWSE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8J1S	08	100S	230E	4304750496	17509			1	GW	P	NWSE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8O3S	08	100S	230E	4304750497	17512			1	GW	P	NWSE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8J3	08	100S	230E	4304750498	17510			1	GW	P	NWSE			1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8C4CS	08	100S	230E	4304750499	17544			1	GW	P	NENW	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8D2DS	08	100S	230E	4304750500	17546			1	GW	P	NENW	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8D3DS	08	100S	230E	4304750501	17545			1	GW	P	NENW	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8F3DS	08	100S	230E	4304750502	17543			1	GW	P	NENW	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8A4CS	08	100S	230E	4304751131	18169			1	GW	P	NWNE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8B3BS	08	100S	230E	4304751132	18167			1	GW	P	NWNE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8C1AS	08	100S	230E	4304751133	18166			1	GW	P	NWNE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8G3AS	08	100S	230E	4304751134	18168			1	GW	P	NWNE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8E2AS	08	100S	230E	4304751135	18227			1	GW	P	SENW	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8F3BS	08	100S	230E	4304751136	18227			1	GW	P	SENW	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8F4AS	08	100S	230E	4304751137	18224			1	GW	P	SENW	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8F4DS	08	100S	230E	4304751138	18225			1	GW	P	SENW	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8J2CS	08	100S	230E	4304751139	18226			1	GW	P	SENW	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8G4DS	08	100S	230E	4304751140	18144			1	GW	P	NESE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8H2DS	08	100S	230E	4304751141	18142			1	GW	P	NESE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8H3DS	08	100S	230E	4304751142	18143			1	GW	P	NESE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8H4DS	08	100S	230E	4304751143	18141			1	GW	P	NESE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8I4BS	08	100S	230E	4304751144	18155			1	GW	P	NESE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8J4BS	08	100S	230E	4304751145	18154			1	GW	P	NESE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8P1AS	08	100S	230E	4304751146	18156			1	GW	P	NESE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8P2BS	08	100S	230E	4304751147	18153			1	GW	P	NESE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8P4AS	08	100S	230E	4304751148	18157			1	GW	P	NESE	D		1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8E2DS	08	100S	230E	4304751149	18201			1	GW	P	NWSW	D		1	WSMVD	P	UTU 37355	N2995

BONANZA 1023-8E3DS	08	100S	230E	4304751150	18200			1	GW	P	NWSW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8K1CS	08	100S	230E	4304751151	18199			1	GW	P	NWSW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8K4CS	08	100S	230E	4304751152	18198			1	GW	P	NWSW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8L3DS	08	100S	230E	4304751153	18197			1	GW	P	NWSW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8M2AS	08	100S	230E	4304751154	18217			1	GW	P	SWSW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8M2DS	08	100S	230E	4304751155	18216			1	GW	P	SWSW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8N2BS	08	100S	230E	4304751156	18218			1	GW	P	SWSW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8O3CS	08	100S	230E	4304751157	18254			1	GW	P	SWSE	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8N3DS	08	100S	230E	4304751158	18215			1	GW	P	SWSW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8O4AS	08	100S	230E	4304751159	18252			1	GW	P	SWSE	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8P2CS	08	100S	230E	4304751160	18251			1	GW	P	SWSE	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-8P3CS	08	100S	230E	4304751161	18253			1	GW	P	SWSE	D	1	WSMVD	P	UTU 37355	N2995
CANYON FEDERAL 2-9	09	100S	230E	4304731504	1468			1	GW	P	NENW		1	MVRD	P	U-37355	N2995
SOUTHMAN CANYON 9-3-M	09	100S	230E	4304732540	11767			1	GW	S	SWSW		1	MVRD	S	UTU-37355	N2995
SOUTHMAN CANYON 9-4-J	09	100S	230E	4304732541	11685			1	GW	S	NWSE		1	MVRD	S	UTU-37355	N2995
BONANZA 9-6	09	100S	230E	4304734771	13852			1	GW	P	NWNE		1	MVRD	P	U-37355	N2995
BONANZA 9-5	09	100S	230E	4304734866	13892			1	GW	P	SESW		1	MVRD	P	U-37355	N2995
BONANZA 1023-9E	09	100S	230E	4304735620	14931			1	GW	P	SWNW		1	WSMVD	P	U-37355	N2995
BONANZA 1023-9I	09	100S	230E	4304738223	16766			1	GW	P	NESE		1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-9D	09	100S	230E	4304738306	16398			1	GW	P	NWNW		1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-9J	09	100S	230E	4304738811	16989			1	GW	P	NWSE		1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-9B3BS	09	100S	230E	4304750503	17965			1	GW	P	SENE	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-9B3CS	09	100S	230E	4304750504	17968			1	GW	P	SENE	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-9H2BS	09	100S	230E	4304750505	17966			1	GW	P	SENE	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-9H2CS	09	100S	230E	4304750506	17967			1	GW	P	SENE	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 10-2	10	100S	230E	4304734704	13782			1	GW	P	NWNW		1	MVRD	P	U-72028	N2995
BONANZA 1023-10L	10	100S	230E	4304735660	15164			1	GW	P	NWSW		1	WSMVD	P	U-38261	N2995
BONANZA 1023-10E	10	100S	230E	4304738224	16501			1	GW	P	SWNW		1	MVRD	P	UTU-72028	N2995
BONANZA 1023-10C	10	100S	230E	4304738228	16500			1	GW	P	NENW		1	MVRD	P	UTU-72028	N2995
BONANZA 1023-10C-4	10	100S	230E	4304738915	17015			1	GW	P	NENW		1	MVRD	P	UTU-72028	N2995
BONANZA 11-2 ★	11	100S	230E	4304734773	13768			1	GW	P	SWNW		1	MVMCS	P	UTU-38425	N2995
BONANZA 1023-11K	11	100S	230E	4304735631	15132			1	GW	P	NESW		1	WSMVD	P	UTU-38425	N2995
BONANZA 1023-11B	11	100S	230E	4304738230	16764			1	GW	P	NWNE		1	MVRD	P	UTU-38425	N2995
BONANZA 1023-11F	11	100S	230E	4304738232	16797			1	GW	P	SENW		1	MVRD	P	UTU-38425	N2995
BONANZA 1023-11D	11	100S	230E	4304738233	16711			1	GW	P	NWNW		1	MVRD	P	UTU-38425	N2995
BONANZA 1023-11G	11	100S	230E	4304738235	16826			1	GW	P	SWNE		1	MVRD	P	UTU-38425	N2995
BONANZA 1023-11C	11	100S	230E	4304738309	16736			1	GW	P	NENW		1	MVRD	P	UTU-38425	N2995
BONANZA 1023-11J	11	100S	230E	4304738310	16839			1	GW	P	NWSE		1	WSMVD	P	UTU-38424	N2995
BONANZA 1023-11N	11	100S	230E	4304738311	16646			1	GW	P	SESW		1	MVRD	P	UTU-38424	N2995
BONANZA 1023-11M	11	100S	230E	4304738312	16687			1	GW	P	SWSW		1	MVRD	P	UTU-38424	N2995
BONANZA 1023-11L	11	100S	230E	4304738812	16987			1	GW	P	NWSW		1	WSMVD	P	UTU-38424	N2995
NSO FEDERAL 1-12	12	100S	230E	4304730560	1480			1	GW	P	NENW		1	MVRD	P	UTU-38423	N2995
WHITE RIVER 1-14	14	100S	230E	4304730481	1500			1	GW	S	NENW		1	MVRD	S	U-38427	N2995
BONANZA 1023-14D	14	100S	230E	4304737030	16799			1	GW	P	NWNW		1	MVRD	P	UTU-38427	N2995
BONANZA 1023-14C	14	100S	230E	4304738299	16623			1	GW	P	NENW		1	MVRD	P	UTU-38427	N2995
BONANZA FEDERAL 3-15	15	100S	230E	4304731278	8406			1	GW	P	NENW		1	MVRD	P	U-38428	N2995

★ not moved into unit

BONANZA 1023-15H	15	100S	230E	4304738316	16688		1	GW	P	SENE		1	MVRD	P	UTU-38427	N2995
BONANZA 1023-15J	15	100S	230E	4304738817	16988		1	GW	P	NWSE		1	MVRD	P	UTU-38427	N2995
BONANZA 1023-15H4CS	15	100S	230E	4304750741	17492		1	GW	P	NESE	D	1	MVRD	P	UTU 38427	N2995
BONANZA 1023-15I2AS	15	100S	230E	4304750742	17493		1	GW	P	NESE	D	1	WSMVD	P	UTU 38427	N2995
BONANZA 1023-15I4BS	15	100S	230E	4304750743	17490		1	GW	P	NESE	D	1	WSMVD	P	UTU 38427	N2995
BONANZA 1023-15P1BS	15	100S	230E	4304750744	17491		1	GW	P	NESE	D	1	WSMVD	P	UTU 38427	N2995
LOOKOUT POINT STATE 1-16	16	100S	230E	4304730544	1495		3	GW	P	NESE		3	WSMVD	P	ML-22186-A	N2995
BONANZA 1023-16J	16	100S	230E	4304737092	15987		3	GW	OPS	NWSE		3	WSMVD	OPS	ML-22186-A	N2995
BONANZA 1023-17B	17	100S	230E	4304735747	15165		1	GW	P	NWNE		1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-17C	17	100S	230E	4304738237	16585		1	GW	P	NENW		1	WSMVD	P	UTU-37355	N2995
BONANZA 1023-17D3S	17	100S	230E	4304750511	17943		1	GW	P	NENW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-17E2S	17	100S	230E	4304750512	17944		1	GW	P	NENW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-17E3AS	17	100S	230E	4304750513	17945		1	GW	P	NENW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-17E3CS	17	100S	230E	4304750514	17946		1	GW	P	NENW	D	1	WSMVD	P	UTU 37355	N2995
BONANZA 1023-18G	18	100S	230E	4304735621	14410		1	GW	P	SWNE		1	WSMVD	P	U-38241	N2995
BONANZA 1023-18B	18	100S	230E	4304735721	14395		1	GW	P	NWNE		1	WSMVD	P	U-38421	N2995
BONANZA 1023-18DX (RIGSKID)	18	100S	230E	4304736218	14668		1	GW	P	NWNW		1	WSMVD	P	U-38241	N2995
BONANZA 1023-18A	18	100S	230E	4304738243	16625		1	GW	P	NENE		1	WSMVD	P	UTU-38421	N2995
BONANZA 1023-18F	18	100S	230E	4304738244	16624		1	GW	P	SENW		1	WSMVD	P	UTU-38421	N2995
BONANZA 1023-18E	18	100S	230E	4304738245	16645		1	GW	P	SWNW		1	MVRD	P	UTU-38421	N2995
BONANZA 1023-18C	18	100S	230E	4304738246	16734		1	GW	P	NENW		1	MVRD	P	UTU-38421	N2995
BONANZA 1023-18G-1	18	100S	230E	4304738916	17135		1	GW	P	SWNE		1	WSMVD	P	UTU-38421	N2995
BONANZA 1023-18D3AS	18	100S	230E	4304750448	17498		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18D3DS	18	100S	230E	4304750449	17499		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18E2DS	18	100S	230E	4304750450	17497		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18E3AS	18	100S	230E	4304750451	17496		1	GW	P	SENW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18L2S	18	100S	230E	4304750520	18111		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18L3S	18	100S	230E	4304750521	18110		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18K3AS	18	100S	230E	4304751061	18112		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18K3BS	18	100S	230E	4304751063	18113		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18M2AS	18	100S	230E	4304751064	18117		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18M2DS	18	100S	230E	4304751065	18116		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18N2AS	18	100S	230E	4304751066	18114		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-18N2DS	18	100S	230E	4304751067	18115		1	GW	P	SWNW	D	1	WSMVD	P	UTU 38421	N2995
BONANZA 1023-10F	10	100S	230E	4304738225	16565			GW	P	SENW			MVRD	P	UTU 72028	N2995
BONANZA 1023-6D1AS	6	100S	230E	4304751450	18320			GW	P	NENW	D		WSMVD	P	UTU 38419	N2995
BONANZA 1023-6C1CS	6	100S	230E	4304751448	18319			GW	P	NENW	D			P	UTU 38419	N2995
BONANZA 1023-6D3AS	6	100S	230E	4304751452	18317			GW	P	NENW	D		WSMVD	P	UTU 38419	N2995