

**EOG Resources, Inc.**  
**P.O. 1910**  
**Vernal, UT 84078**

November 20, 2003

Utah Division of Oil, Gas, & Mining  
1594 West North Temple, Suite 1210  
P.O. Box 145801  
Salt Lake City, UT 84114-5801

**RE: APPLICATION FOR PERMIT TO DRILL  
CHAPITA WELLS UNIT 882-22  
SW/NE, SEC. 22, T9S, R22E  
UINTAH COUNTY, UTAH  
LEASE NO.: U-0284-A  
FEDERAL LANDS**

Enclosed please find a copy of the Application for Permit to Drill and associated attachments for the referenced well.

Please address further communication regarding this matter (including approval) to:

Ed Trotter  
P.O. Box 1910  
Vernal, UT 84078  
Phone: (435)789-4120  
Fax: (435)789-1420

Sincerely,



Ed Trotter  
Agent  
EOG Resources, Inc.

Attachments

**RECEIVED**

**DEC 10 2003**




T9S, R22E, S.L.B.&M.

E 1/4 Cor. Sec. 15, Brass Cap


EOG RESOURCES, INC.

Well location, CWU #882-22, located as shown in the SW 1/4 NE 1/4 of Section 22, T9S, R22E, S.L.B.&M. Uintah County, Utah.

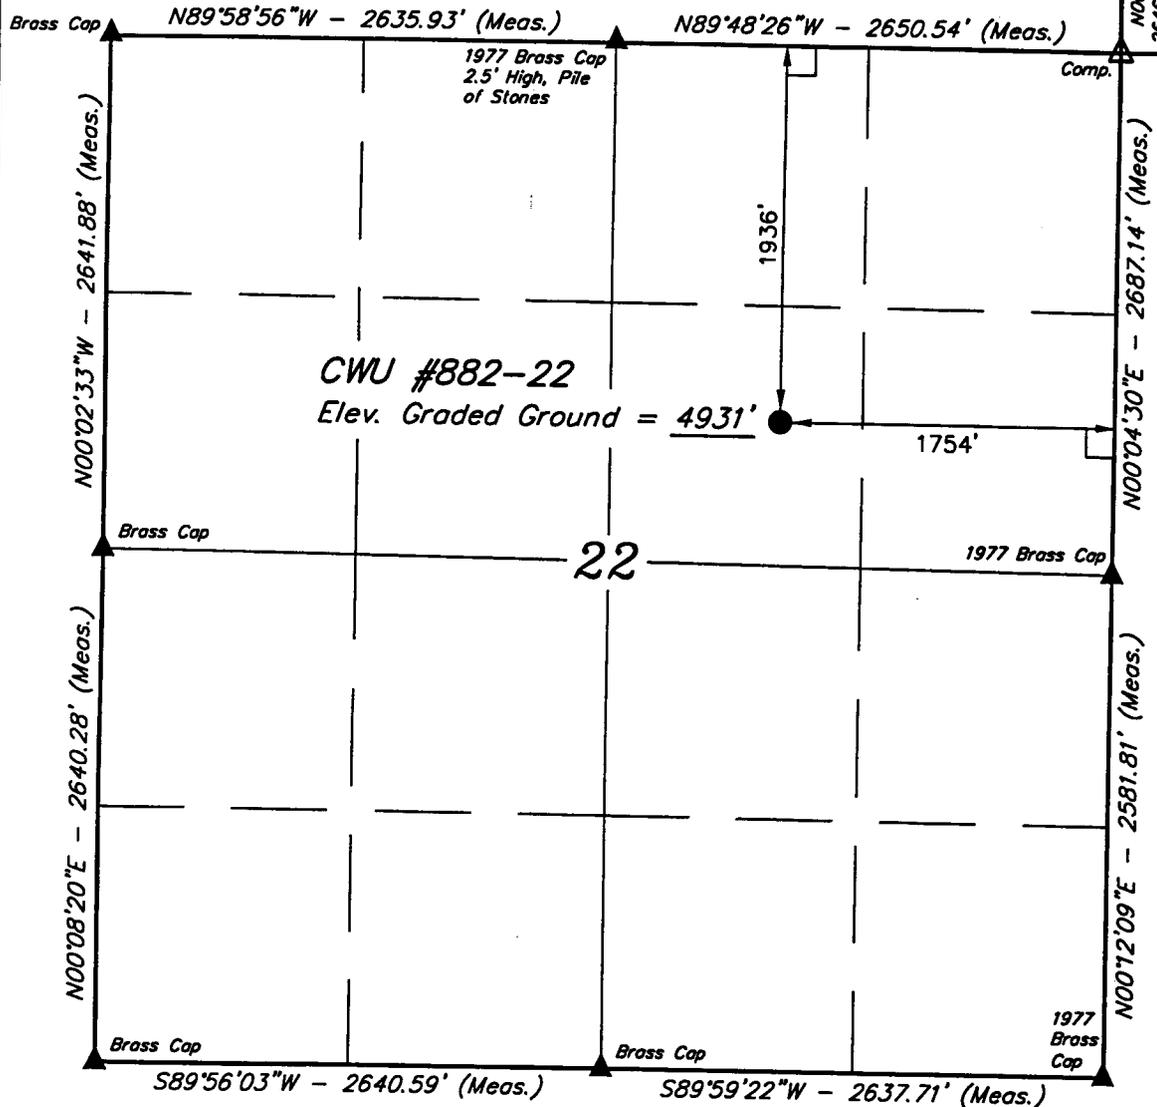

BASIS OF ELEVATION

BENCH MARK 20EAM LOCATED IN THE SE 1/4 OF SECTION 35, T8S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4697 FEET.



CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS, MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

*Robert A. Hays*  
REGISTERED LAND SURVEYOR  
REGISTRATION NO. 01319  
STATE OF UTAH

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

(NAD 27)

LATITUDE = 40°01'24.39" (40.023442)

LONGITUDE = 109°25'20.03" (109.422231)

LEGEND:

└─┘ = 90° SYMBOL

● = PROPOSED WELL HEAD.

▲ = SECTION CORNERS LOCATED.

△ = SECTION CORNERS RE-ESTABLISHED BY DOUBLE PROPORTION METHOD. (Not Set On Ground)

UINTAH ENGINEERING & LAND SURVEYING  
85 SOUTH 200 EAST - VERNAL, UTAH 84078  
(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 10-09-03	DATE DRAWN: 10-13-03
PARTY G.S. M.B. D.COX	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE EOG RESOURCES, INC.	

**EIGHT POINT PLAN**

**CHAPITA WELLS UNIT 882-22**  
**SW/NE, SEC. 22, T9S, R22E, S.L.B.&M.**  
**UINTAH COUNTY, UTAH**

**1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:**

<b>FORMATION</b>	<b>DEPTH (KB)</b>
Green River	1,706'
Wasatch	4,766'
Island	7,236'
KMV Price River	7,421'
KMV Price River Middle	8,106'
KMV Price River Lower	8,921'
Sego	9,346'
KMV Castlegate	9,526'
Base Castlegate SS	9,756'
Bit Trip Black Hawk Shale	9,946'
KMV Black Hawk	9,966'

EST. TD: 10,336

Anticipated BHP 4500 PSI

- 3. PRESSURE CONTROL EQUIPMENT:** Surface Hole - 3000 PSIG  
Production Hole - 5000 PSIG  
BOP Schematic Diagrams attached.

**4. CASING PROGRAM:**

<b><u>HOLE SIZE</u></b>	<b><u>INTERVAL</u></b>	<b><u>LENGTH</u></b>	<b><u>SIZE</u></b>	<b><u>WEIGHT</u></b>	<b><u>GRADE</u></b>	<b><u>THREAD</u></b>	<b><u>RATING FACTOR</u></b>		
							<b><u>COLLAPSE</u></b>	<b><u>BURST</u></b>	<b><u>TENSILE</u></b>
12 1/4"	0' - 2400' +/- KB	2400' +/-	9 5/8"	36.0 #	J-55	ST&C	2020 PSI	3520 PSI	394,000#
7 7/8"	2400' - TD +/-KB	10,336' +/-	4 1/2"	11.6 #	N-80	LT&C	6350 PSI	7780 PSI	223,000#

All casing will be new or inspected.

**5. Float Equipment:**

**Surface Hole Procedure (0-2400' Below GL):**

(PDC drillable)

Float Collar (PDC drillable)

Centralizers: 1-5' above shoe, top of jts. #2 and #3 then every 5<sup>th</sup> joint to surface (15 total.)

**Production Hole Procedure (2400'-TD'):**

FS, 1 joint of casing, FC, and balance of casing to surface. Run 11.6#, N-80 burst rating or equivalent marker collars or short casing joints at  $\pm 8,100'$  and  $\pm 7,500'$  (alter depth if needed to avoid placing across any potentially- productive intervals). Centralize 5' above shoe on joint #1, top of joint #2, then every 2nd joint to 400' above Island top (40 total). Thread lock FS, top and bottom of FC, and top of 2<sup>nd</sup> joint.

**EIGHT POINT PLAN**

**CHAPITA WELLS UNIT 882-22**  
**SW/NE, SEC. 22, T9S, R22E, S.L.B.&M.**  
**UINTAH COUNTY, UTAH**

**6. MUD PROGRAM**

**Surface Hole Procedure (0-2400' below GL):**

Air – Air Water Mist

**Production Hole Procedure (2400'-TD):**

2300' – 5000': Circulate fresh water through reserve pit and add Crystal Drill. Sweep with Barazan D and Barolift.

5000' - 9000': Close in pits and add 6 ppb DAP. Add Crystal Drill to keep water clear. Add NaCl water for weight. Sweep with Barazan D and Barolift

9000' – TD: Close in pits and add 6 ppb DAP. Add Crystal Drill to keep water clear. Add barite for weight. Add sea mud for viscosity as needed. Sweep with Barazan D and Barolift

**7. VARIANCE REQUESTS:**

- A. EOG Resources, Inc. requests a variance to regulations requiring a straight run blooie line (Where possible, a straight run blooie line will be used).
- B. EOG Resources, Inc. requests a variance to regulations requiring an automatic ignitor or continuous pilot light on the blooie line. (Not required on aerated water system).
- C. EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. To reduce location excavation, the blooie line will be 75' in length.

**8. EVALUATION PROGRAM:**

Logs: RST (Reservoir Saturation Tool) Cased logs                      TD to Surface

**9. CEMENT PROGRAM:**

**Surface Hole Procedure (0-2400' Below GL)**

**Lead:** 1376 sks: (100% excess volume) Class 'G' cement with 2% S001 (CaCl<sub>2</sub>) & 0.25 pps D29 (cellophane flakes), mixed at 15.8 ppg, 1.16 ft<sup>3</sup>/sk., 4.95 gps water.

**Top Out:** Top out with Class 'G' cement with 2% S1 (CaCl<sub>2</sub>) in mix water, 15.8 ppg, 1.16 ft<sup>3</sup>/sk., 4.95 gps via 1" tubing set at 25' if needed.

**EIGHT POINT PLAN**

**CHAPITA WELLS UNIT 882-22**  
**SW/NE, SEC. 22, T9S, R22E, S.L.B.&M.**  
**UINTAH COUNTY, UTAH**

**CEMENT PROGRAM Continued):**

**Production Hole Procedure (2400' to TD)**

**Lead: 150 sks. 35:65 Poz: Class "G" w/ 4% D20 (Bentonite), + 2% D174 + 0.75% D112 + 0.2% D46 + 0.15% D13 + 0.25 pps D29, mixed at 13.0 ppg, 1.73 ft<sup>3</sup>/sk., 9.06 gps water.**

**Tail: 280 sks 50:50 Poz: Class "G" w/ 2% D20 (Bentonite), + 0.1% D46 + 0.075% D800 + 0.2% D167 + 0.2% D65 + 35% D66, mixed at 14.1 ppg, 1.28 ft<sup>3</sup>/sk., 5.9 gps water.**

**10. ABNORMAL CONDITIONS:**

**Production Hole (2400'-TD):**

Sloughing shale's and key seat development are possible in the Wasatch Formation. CO<sub>2</sub> contamination in the mud is possible in Price River (Mesa Verde).

**11. STANDARD REQUIRED EQUIPMENT:**

- A. Choke Manifold
- B. Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

**12. HAZARDOUS CHEMICALS:**

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.


(Attachment: BOP Schematic Diagram)

## 3000 PSIG DIAGRAM

ANNULAR PREVENTOR AND BOTH RAMS ARE 3000 PSIG RATED.  
CASING FLANGE IS 11" 3000 PSIG RATED.  
BOPE 11" 3000 PSIG

### TESTING PROCEDURE:

1. BOPE's will be tested with a professional tester to conform to Onshore Order #2 with retest every 14 days.
2. Blind & Pipe rams will be tested to rated working pressure, 3000 psig.
3. Annular preventor will be tested to 50% of working pressure, 1500 psig.
4. Casing will be tested to 0.22 psi/ft. or 1500 psig. Not to exceed 70% of burst strength, whichever is greater.
5. All lines subject to well pressure will be pressure-tested to the same pressure as blind & pipe rams.
6. All BOPE specifications and configurations will meet Onshore Order #2 requirements for 3000 psig BOPE specifications.


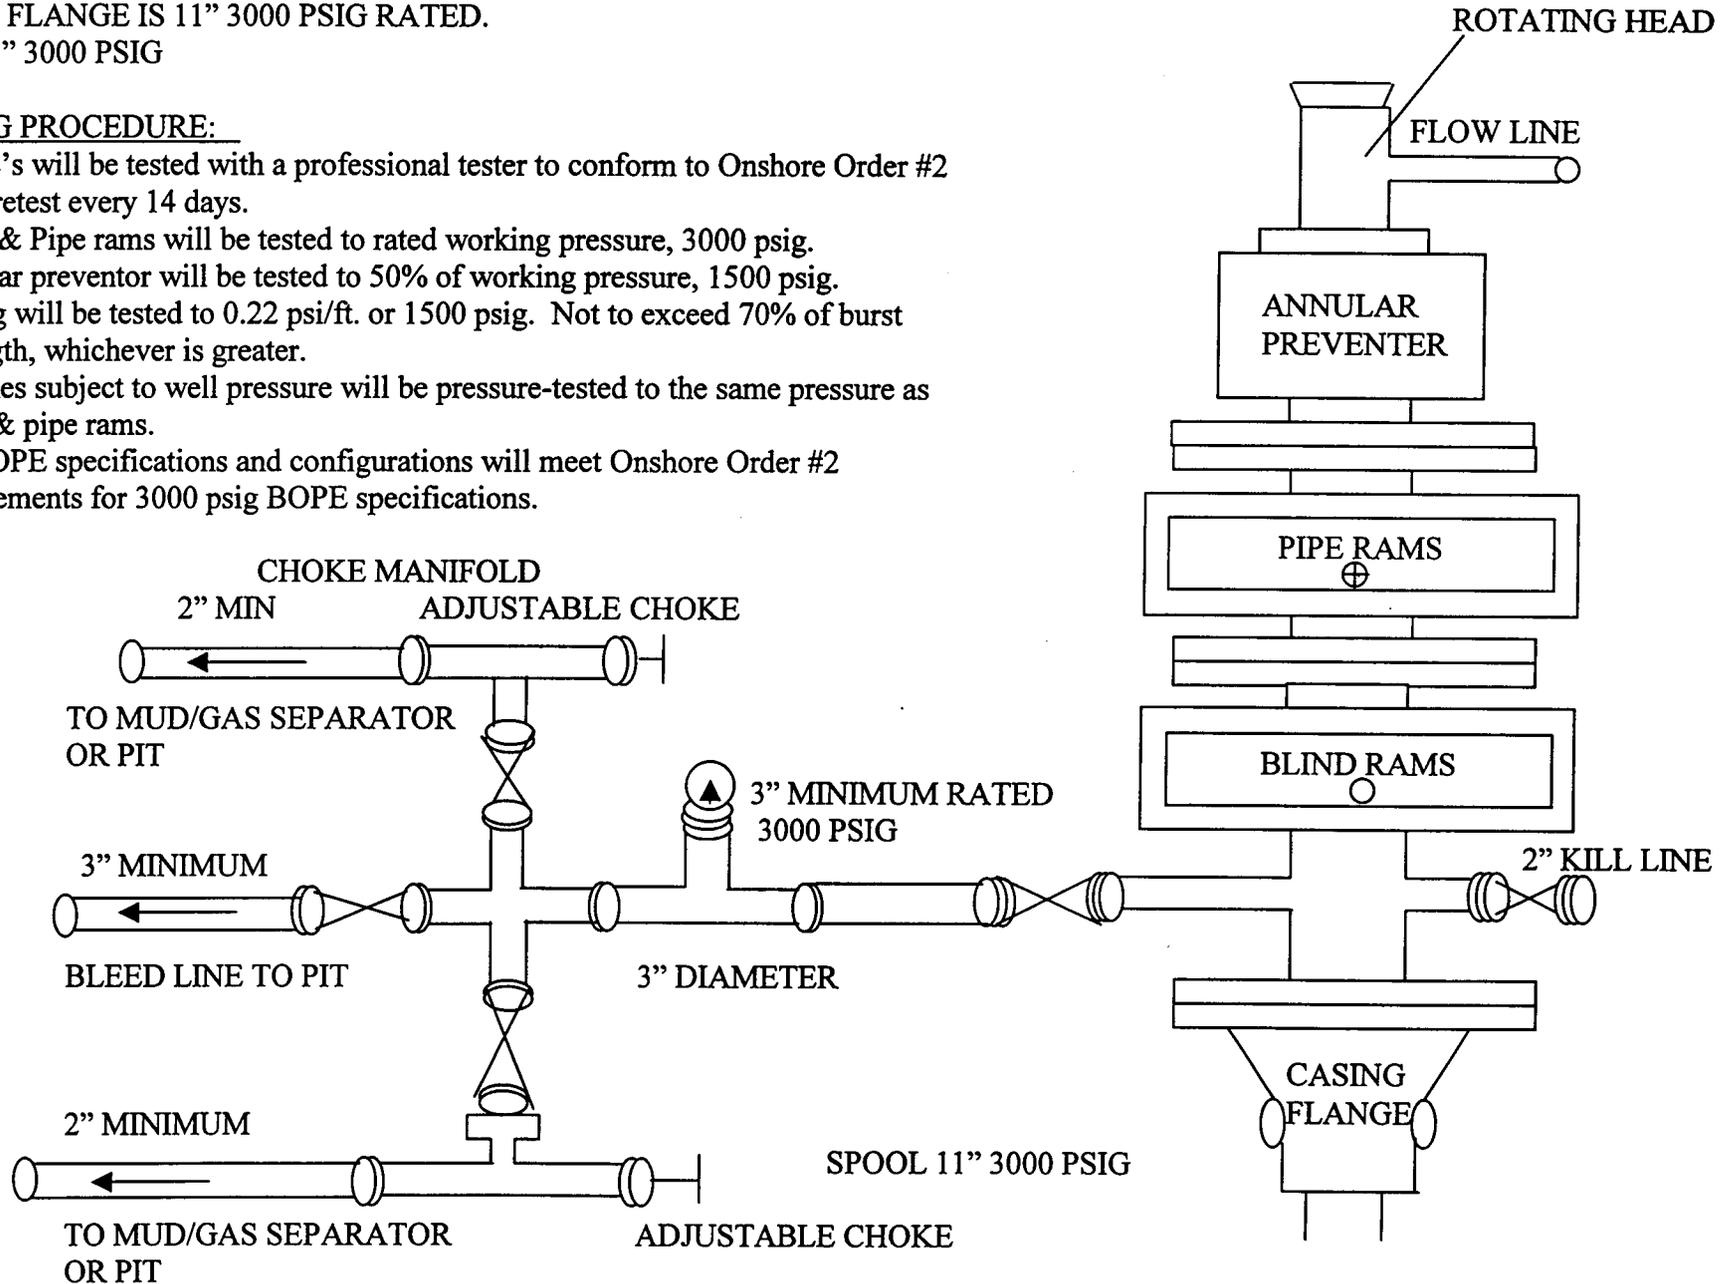


## 5000 PSIG DIAGRAM

ANNULAR PREVENTOR AND BOTH RAMS ARE 5000 PSIG RATED.  
 CASING FLANGE IS 11" 5000 PSIG RATED.  
 BOPE 11" 5000 PSIG

### TESTING PROCEDURE:

1. BOPE's will be tested with a professional tester to conform to Onshore Order #2 with retest every 14 days.
2. Blind & Pipe rams will be tested to rated working pressure, 5000 psig.
3. Annular preventor will be tested to 50% of working pressure, 2500 psig.
4. Casing will be tested to 0.22 psi/ft. or 2500 psig. Not to exceed 70% of burst strength, whichever is greater.
5. All lines subject to well pressure will be pressure-tested to the same pressure as blind & pipe rams.
6. All BOPE specifications and configurations will meet Onshore Order #2 requirements for 5000 psig BOPE specifications.

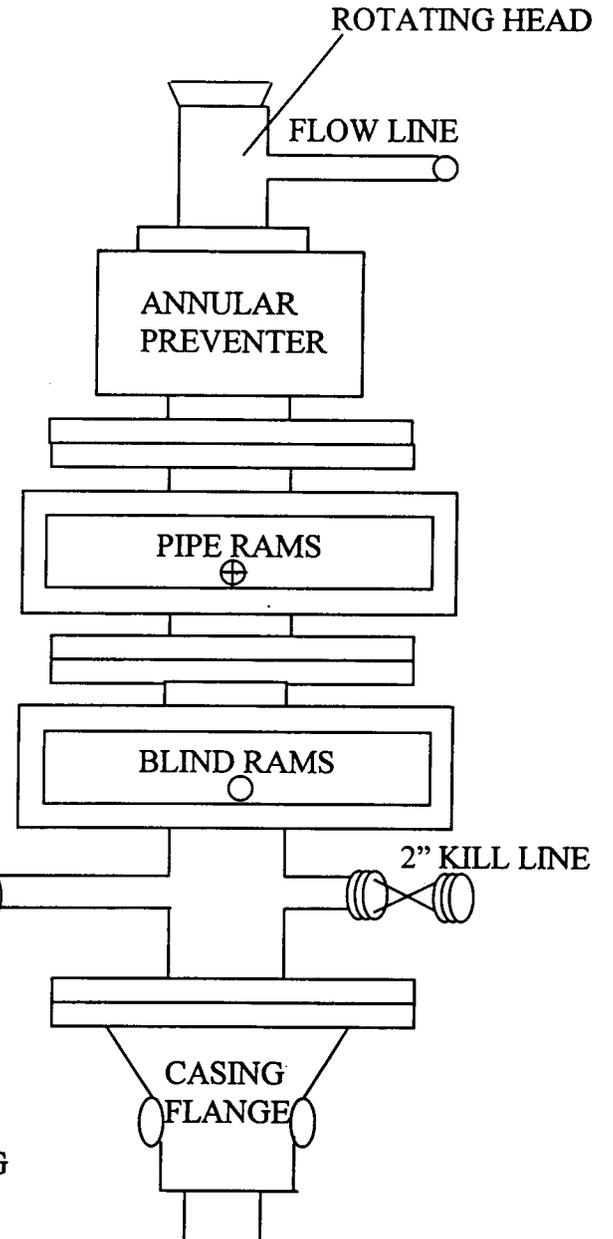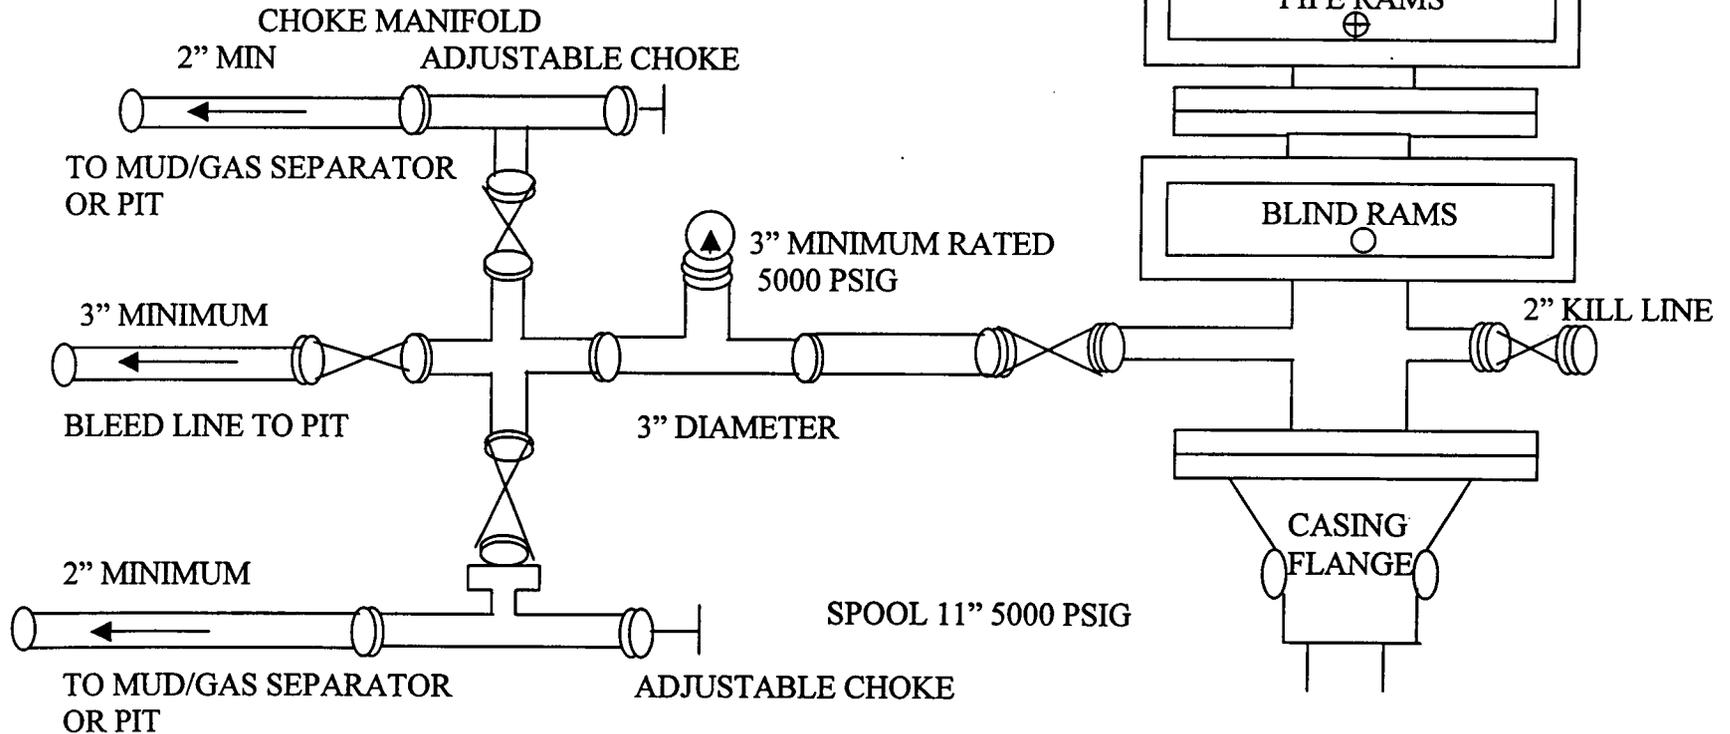

EOG RESOURCES, INC.  
CWU #882-22  
SECTION 22, T9S, R22E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 0.3 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 12.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 1.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 1.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 0.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 0.15 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN RIGHT AND PROCEED IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 0.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN LEFT AND PROCEED IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 0.1 MILES TO THE CWU #324-22 AND THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 48.45 MILES.

**CONDITIONS OF APPROVAL  
FOR THE SURFACE USE PROGRAM OF THE  
APPLICATION FOR PERMIT TO DRILL**

Company/Operator:	<u>EOG Resources, Inc.</u>
Well Name & Number:	<u>Chapita Wells Unit 882-22</u>
Lease Number:	<u>U-0284-A</u>
Location:	<u>1936' FNL &amp; 1754' FEL, SW/NE, Sec. 22, T9S, R22E, S.L.B.&amp;M., Uintah County, Utah</u>
Surface Ownership:	<u>Federal</u>

**NOTIFICATION REQUIREMENTS**

Location Construction - forty-eight (48) hours prior to construction of location and access roads.

Location Completion - prior to moving on the drilling rig.

Spud Notice: - at least twenty-four (24) hours prior to spudding the well.

Casing String and Cementing - twenty-four (24) hours prior to running casing and cementing all casing strings.

BOP and related Equipment Tests - twenty-four (24) hours prior to running casing and tests.

First Production Notice - within five (5) business days after new Well begins or production resumes after Well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

## **THIRTEEN POINT SURFACE USE PROGRAM**

### **1. EXISTING ROADS**

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 17.45 miles southeast of Ouray, Utah - See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

### **2. PLANNED ACCESS ROAD**

- A. An existing access road will be utilized to access this well. See attached TOPO Map "B".
- B. The access road has a 30 foot ROW w/ 18 foot running surface.
- C. Maximum grade on access road will be 8%.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No culverts, bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of-Way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by run off water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, EOG Resources, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

3. **LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION**

- A. Abandoned wells - 6\*
- B. Producing wells - 55\*
- C. Shut in wells - 2\*

(\*See attached TOPO map "C" for location)

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

A. **ON WELL PAD**

- 1. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of wellhead valves, combo separator-dehy unit with meter, 300 Bbl vertical or 200 Bbl low profile, condensate tank, and attaching piping.
- 2. Gas gathering lines - A 3" gathering line will be buried from dehy to the edge of the location.

B. **OFF WELL PAD**

- 1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
- 2. Protective measures and devices for livestock and wildlife will be taken and/or installed where required.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery.

The production facilities will be placed on the East side of the location.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within 6 months of installation. Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

The required paint color is Carlsbad Canyon.

If at any time the facilities located on public land and authorized by the terms of the lease are no longer included in the lease (due to a contraction

in the unit or other lease or unit boundary change), BLM will process a change in authorization to the appropriate statute. The authorization will be subject to appropriate rental or other financial obligation as determined by the authorized officer.

**5. LOCATION & TYPE OF WATER SUPPLY**

- A. Water supply will be from Ouray Municipal Water Plant at Ouray, Utah, and/or Target Trucking Inc.'s water source in the SW/SW, Sec. 35, T9S, R22E, Uintah County, Utah (State Water Right #49-1501). Produced water from the Chapita Wells and Stagecoach Units will also be used.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

**6. SOURCE OF CONSTRUCTION MATERIAL**

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of the location.
- B. All construction material will come from Federal Land.
- C. No mineral materials will be required.

**7. METHODS OF HANDLING WASTE DISPOSAL**

**A. METHODS AND LOCATION**

- 1. Cuttings will be confined in the reserve pit.
- 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
- 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah County Landfill.
- 4. Produced wastewater will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. After the 90 day period, the produced water will be contained in a tank on location and then disposed of at one of the following three locations: Natural Buttes Unit 21-20B SWD, Ace Disposal, or EOG Resources, Inc. drilling operations (Chapita Wells Unit, Natural Buttes Unit & Stagecoach Unit).
- 5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.

- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit or be removed and disposed of at an authorized disposal site. Introduction of well bore

hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

**On BLM administered land:**

The reserve pit will be constructed so as not to leak, break, or allow discharge. If the reserve pit requires padding prior to lining (due to rocky conditions) felt padding will be used.

**The reserve pit shall be lined with a plastic liner. A felt liner will also be installed if rock is encountered during pit construction.**

**8. ANCILLARY FACILITIES**

- A. No airstrips or camps are planned for this well.

**9. WELLSITE LAYOUT**

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.
- D. The approved seed mixture for this location is:
  - Indian Rice Grass – 4 pounds per acre
  - Four Wing Salt Bush – 3 pounds per acre
  - Hi Crest Crested Wheat Grass – 2 pounds per acre

The reserve pit will be located on the Northwest corner of the location. The flare pit will be located downwind of the prevailing wind direction on the North side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled pit topsoil will be stored separate from the location topsoil East of Corners B and 5. The stockpiled location topsoil will be stored between Corners #1 and #2. Upon completion of construction, the stockpiled topsoil from the location will be broadcast seeded with the approved seed mixture for this location and then walked down with a cat.

Access to the well pad will be from the West.

**FENCING REQUIREMENTS:**

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).

- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BLM or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is to be regularly traveled. If the well is a producer, the cattleguards (shall/shall not) be permanently mounted on concrete bases. Prior to crossing any fence located on Federal land, or any fence between Federal land and private land, the operator will contact the BLM, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

## **10. PLANS FOR RESTORATION OF SURFACE**

### **A. PRODUCING LOCATION**

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The stockpiled pit topsoil will then be spread over the pit area and broadcast seeded with the prescribed seed mixture for this location. The seeded area will then be walked down with a cat.

**B. DRY HOLE/ABANDONED LOCATION**

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BLM will attach the appropriate surface rehabilitation conditions of approval.

**11. SURFACE OWNERSHIP**

Access road: Federal

Location: Federal

**12. OTHER INFORMATION**

A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to:

- whether the materials appear eligible for the National Register of Historic Places;
- the mitigation measures the operator will likely have to undertake before the site can be used.
- a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

B. As operator, EOG Resources, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BLM, or the appropriate County Extension Office. On BLM administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.

- C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on BLM lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

**Additional Surface Stipulations**

None

**LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION**

**PERMITTING AGENT**

Ed Trotter  
P.O. Box 1910  
Vernal, UT 84078  
Telephone: (435)789-4120  
Fax: (435)789-1420

**DRILLING OPERATIONS**

Donald Presenkowski  
EOG Resources, Inc.  
P.O. Box 250  
Big Piney, WY 83113  
Telephone: (307)276-4865

All lease or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. EOG Resources, Inc. is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.

**Certification**

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions that presently exist; that the statements made in the Plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by EOG Resources, Inc. and its contractors and subcontractors in conformity with this Plan and the terms and conditions under which it is approved.

Please be advised that EOG Resources, Inc. is considered to be the operator of the **Chapita Wells Unit 882-22 Well, located in the SW/NE of Section 22, T9S, R22E, Uintah County, Utah; Lease #U0284-A;** and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond Coverage is provided under Bond #NM 2308.

11-20-2003  
Date

  
Agent

# EOG RESOURCES, INC.

CWU #882-22

LOCATED IN UINTAH COUNTY, UTAH  
SECTION 22, T9S, R22E, S.1.B.&M.

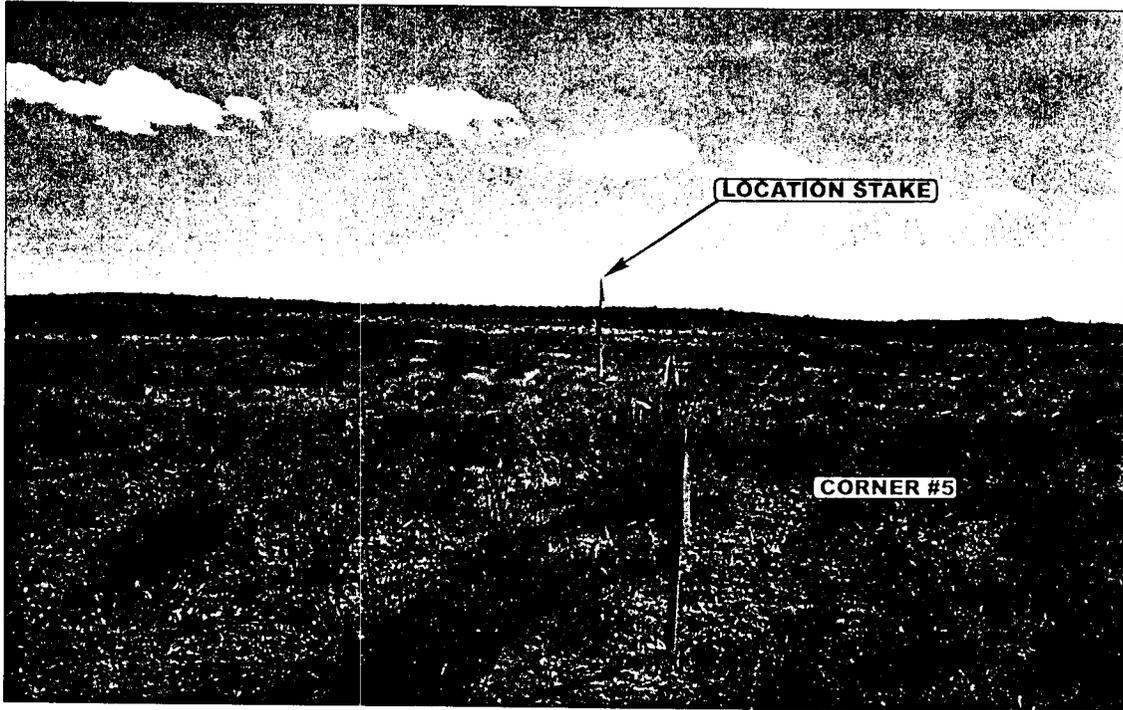


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: SOUTHERLY

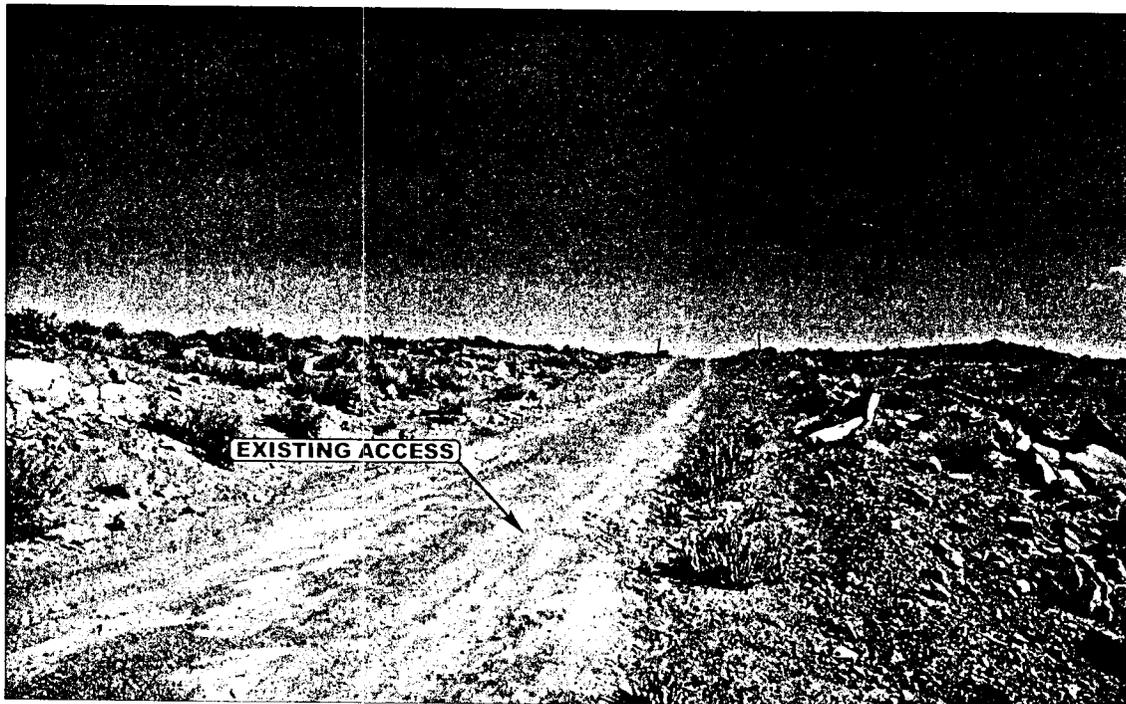


PHOTO: VIEW OF EXISTING ACCESS

CAMERA ANGLE: NORTHEASTERLY



Since 1964

**UELS** Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS	10	21	03	PHOTO
	MONTH	DAY	YEAR	
TAKEN BY: G.S.	DRAWN BY: J.L.G.		REVISED: 00-00-00	




EOG RESOURCES, INC.

TYPICAL CROSS SECTIONS FOR





CWU #882-22

SECTION 22, T9S, R22E, S.L.B.&M.

1936' FNL 1754' FEL



DATE: 10-13-03  
Drawn By: D.COX

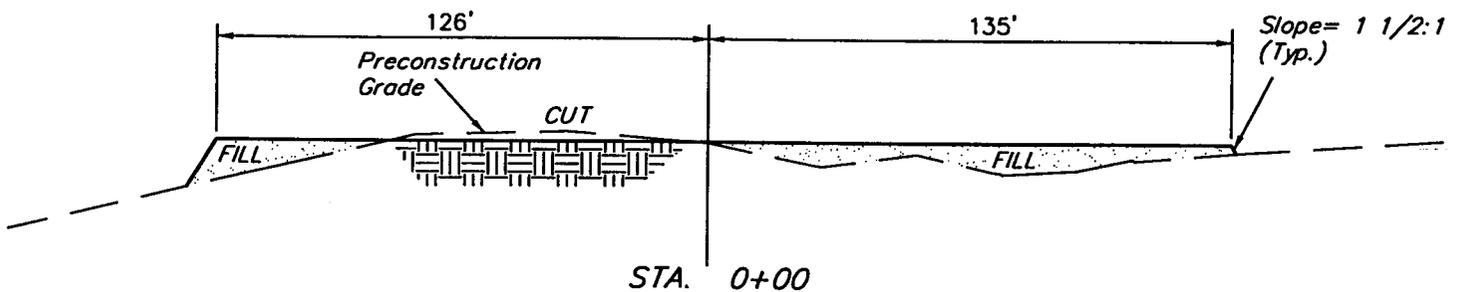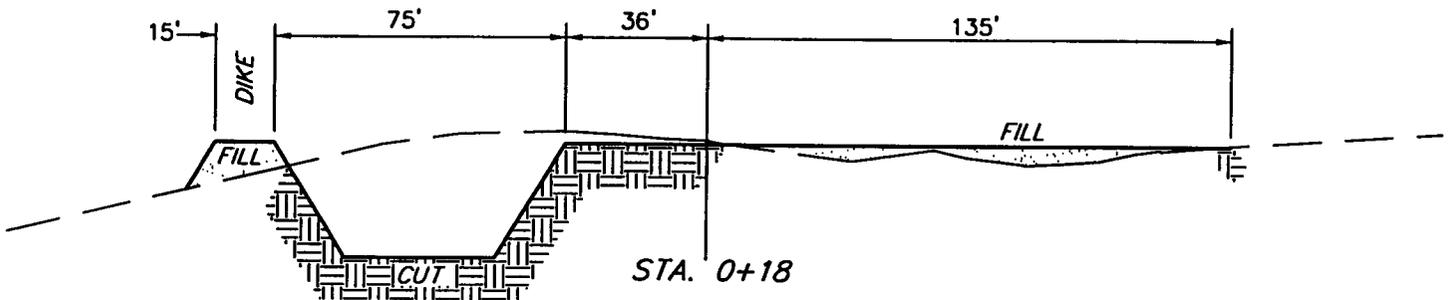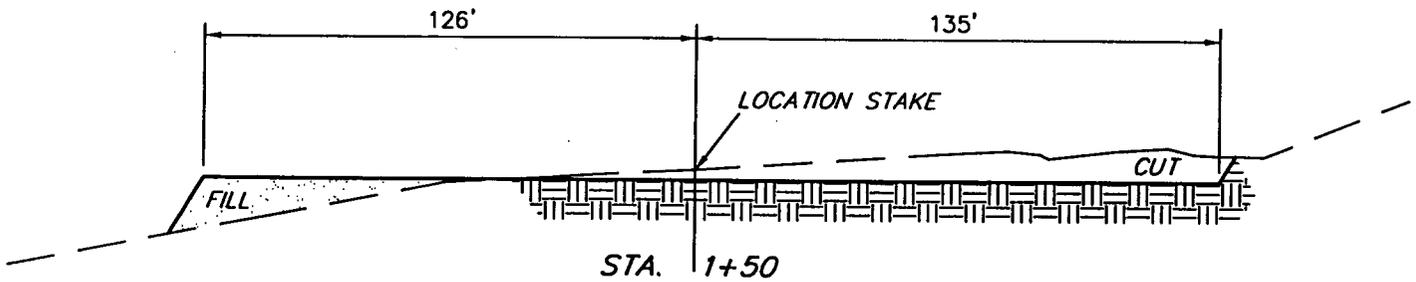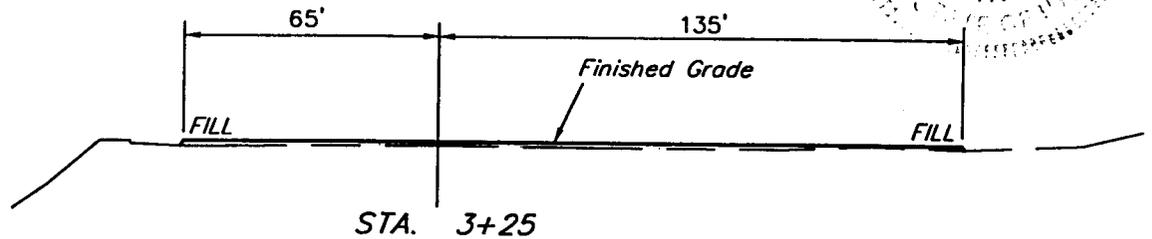

APPROXIMATE YARDAGES

(6") Topsoil Stripping = 1,010 Cu. Yds.  
(New Construction Only)

Remaining Location = 4,370 Cu. Yds.


TOTAL CUT = 5,380 CU.YDS.

FILL = 2,580 CU.YDS.

EXCESS MATERIAL AFTER 5% COMPACTION = 2,670 Cu. Yds.

Topsoil & Pit Backfill (1/2 Pit Vol.) = 2,670 Cu. Yds.

EXCESS UNBALANCE (After Rehabilitation) = 0 Cu. Yds.

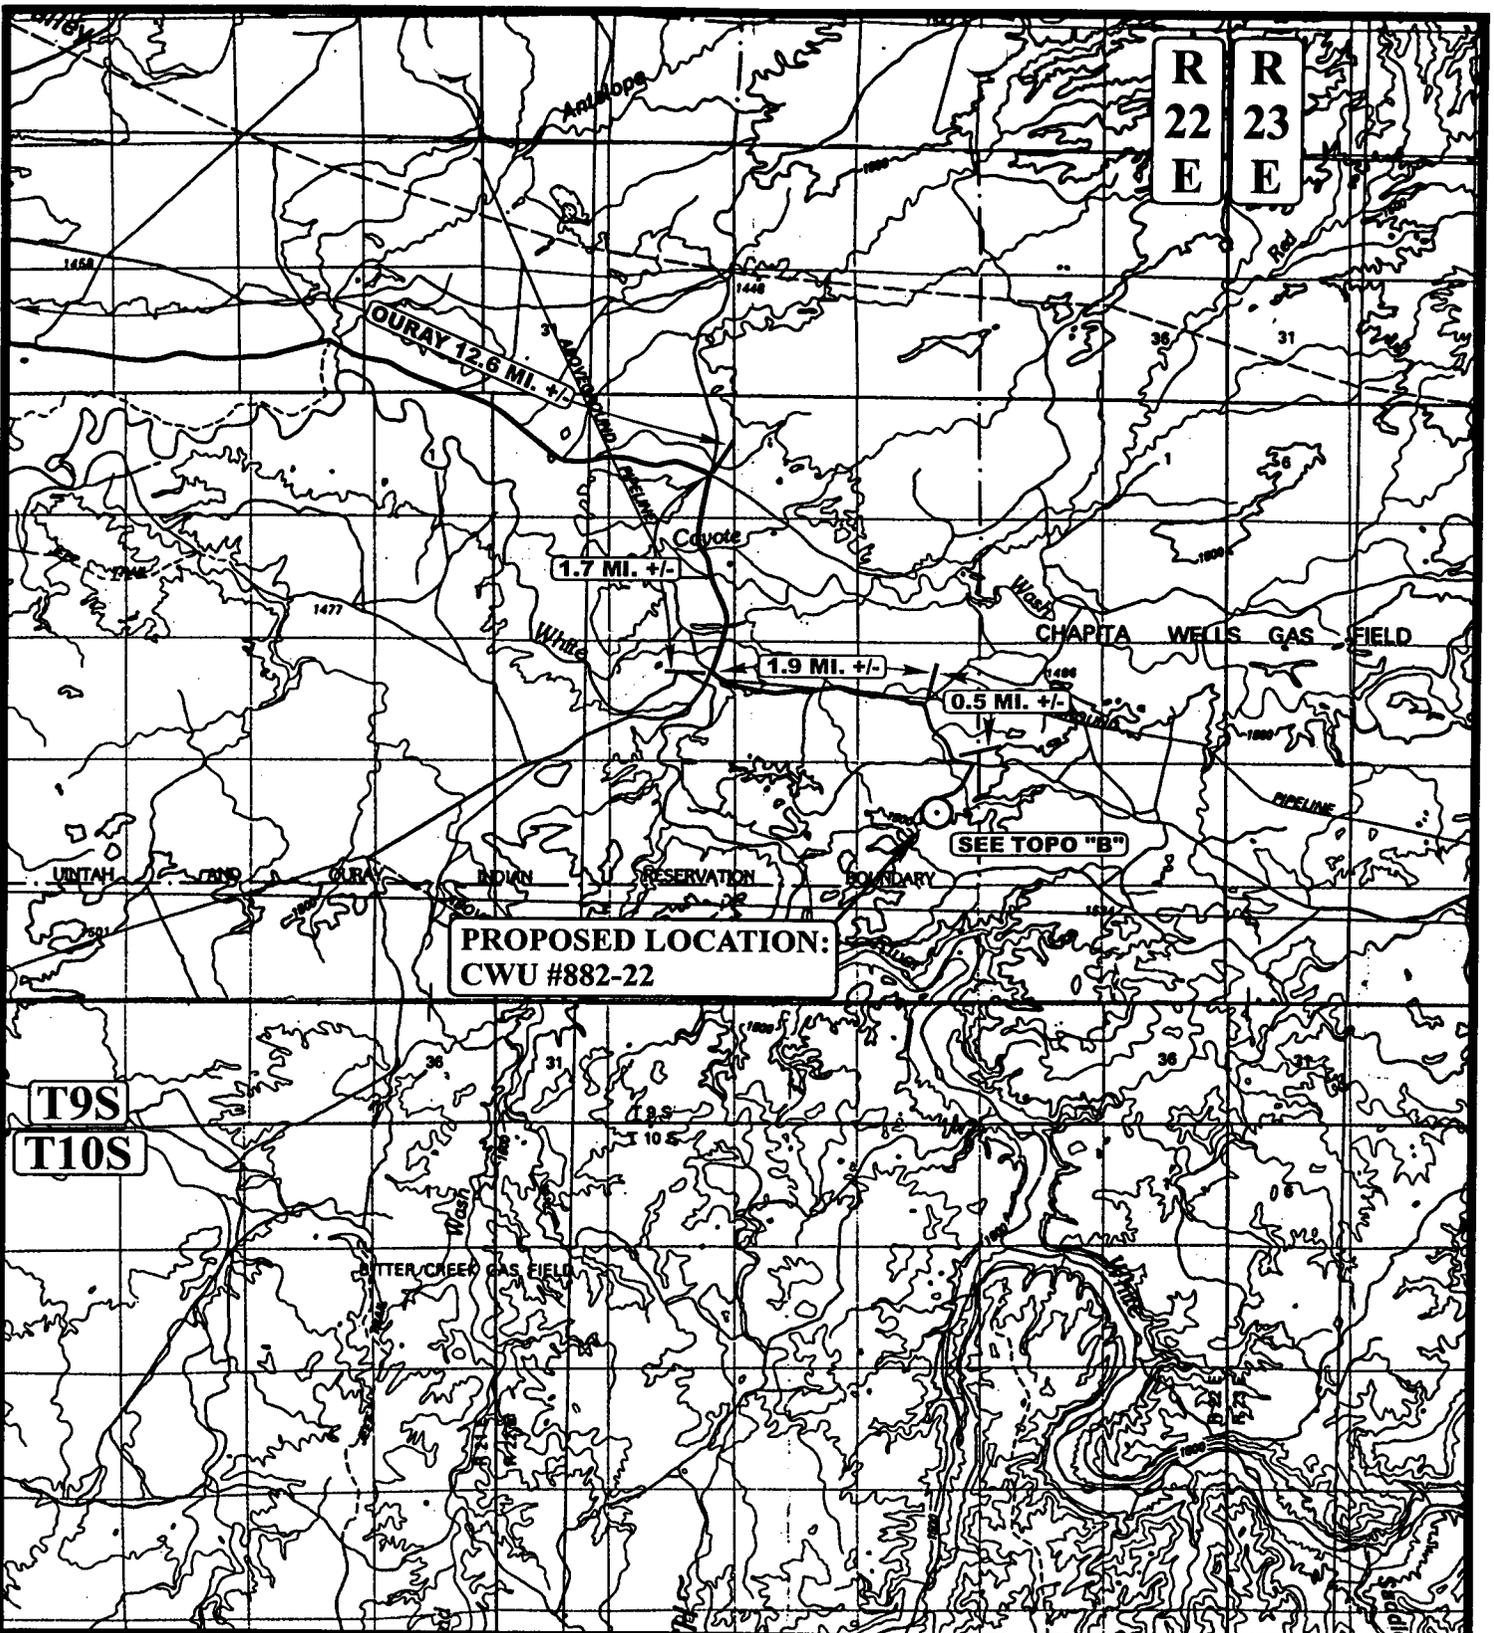

**PROPOSED LOCATION:  
CWU #882-22**

SEE TOPO "B"

**LEGEND:**

⊙ PROPOSED LOCATION



**EOG RESOURCES, INC.**


**CWU #882-22  
SECTION 22, T9S, R22E, S.L.B.&M.  
1936' FNL 1754' FEL**



**Utah Engineering & Land Surveying**  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC** 10 21 03  
**MAP** MONTH DAY YEAR  
SCALE: 1:100,000 DRAWN BY: J.L.G. REVISED: 00-00-00



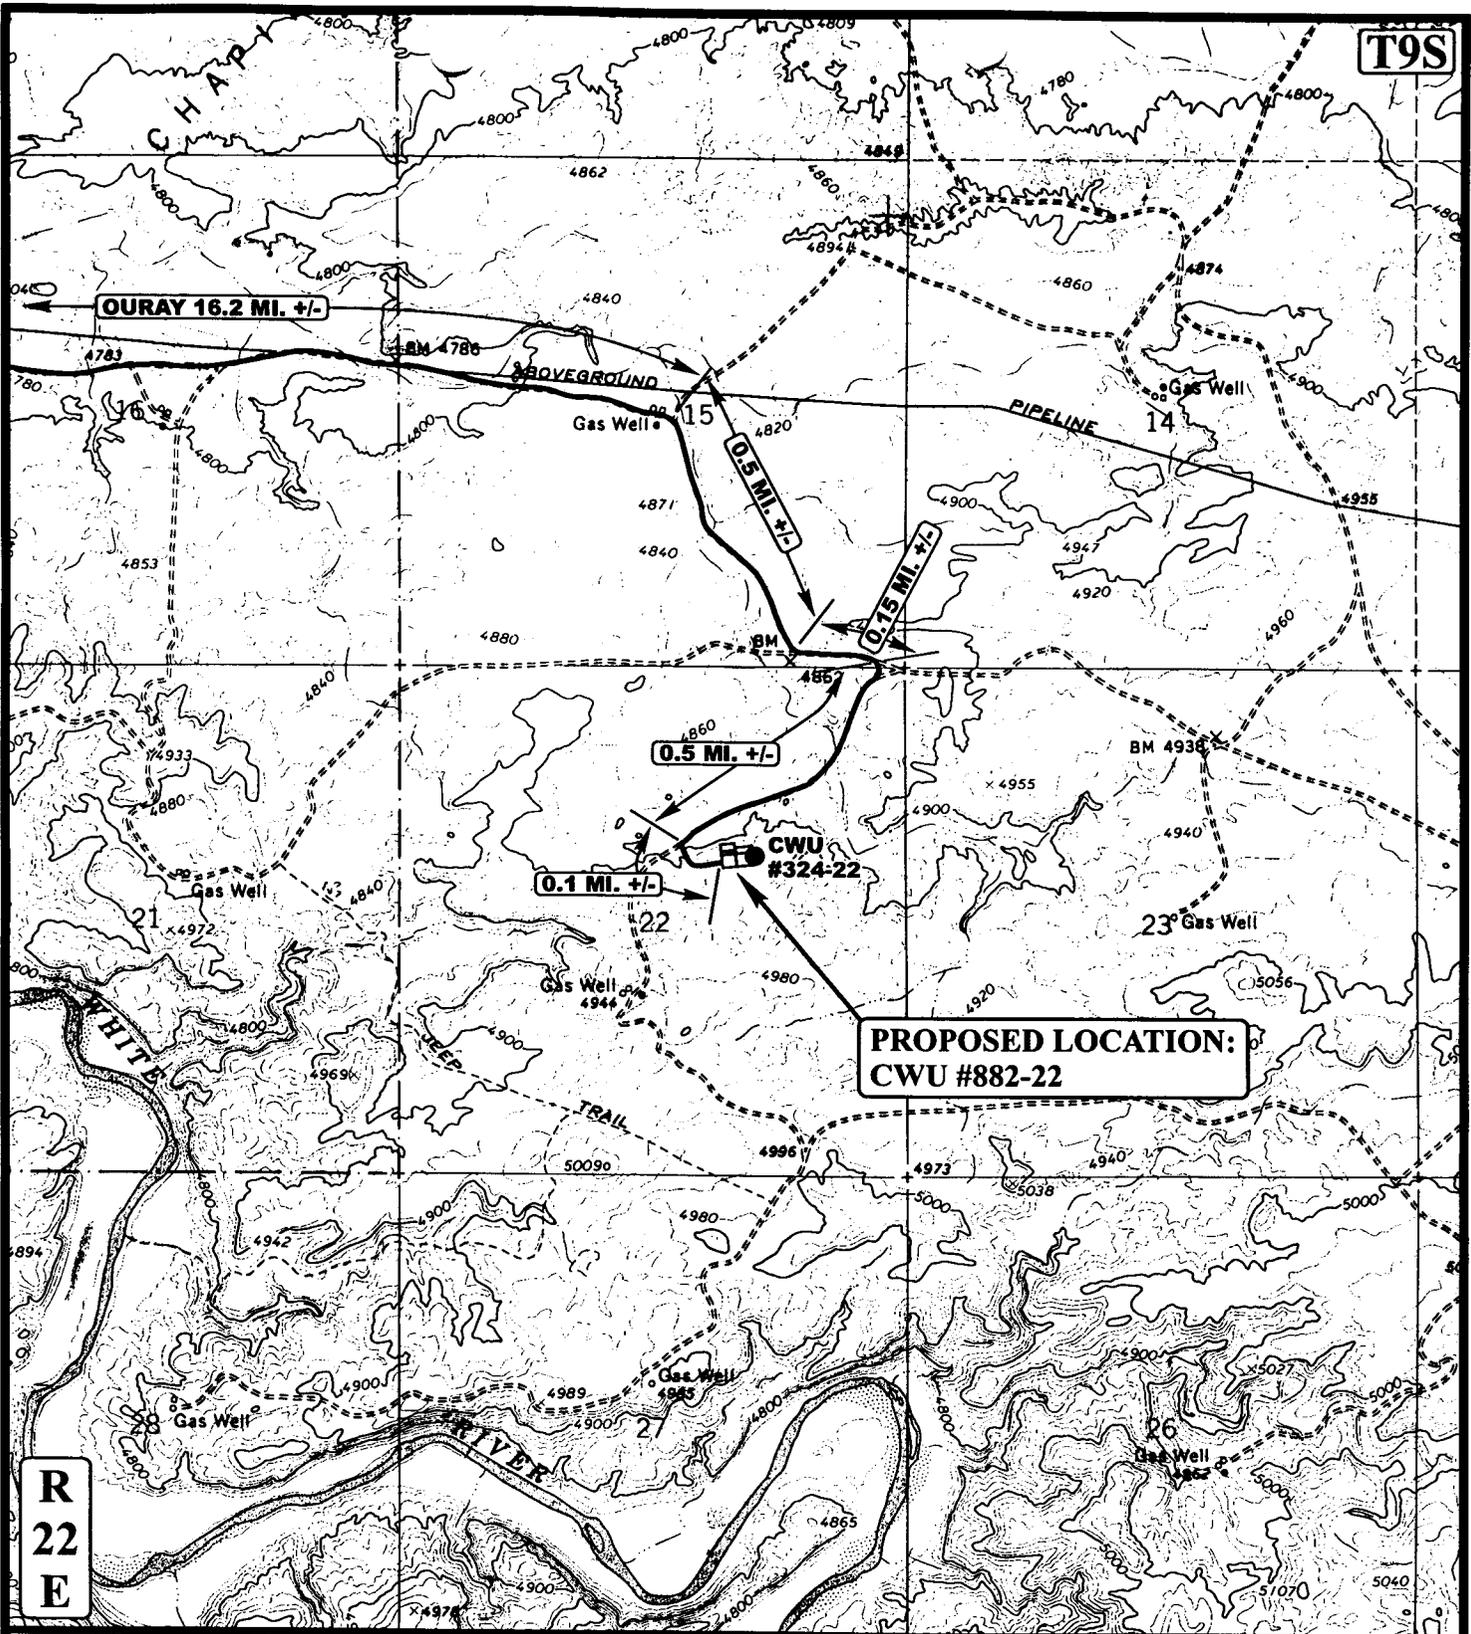

**LEGEND:**

— EXISTING ROAD



**Uintah Engineering & Land Surveying**  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813



**EOG RESOURCES, INC.**

**CWU #882-22**  
**SECTION 22, T9S, R22E, S.L.B.&M.**  
**1936' FNL 1754' FEL**

**TOPOGRAPHIC**  
**MAP**

<b>10</b>	<b>21</b>	<b>03</b>
MONTH	DAY	YEAR


SCALE: 1" = 2000'

DRAWN BY: J.L.G.

REVISED: 00-00-00

**B**  
**TOPO**

T9S

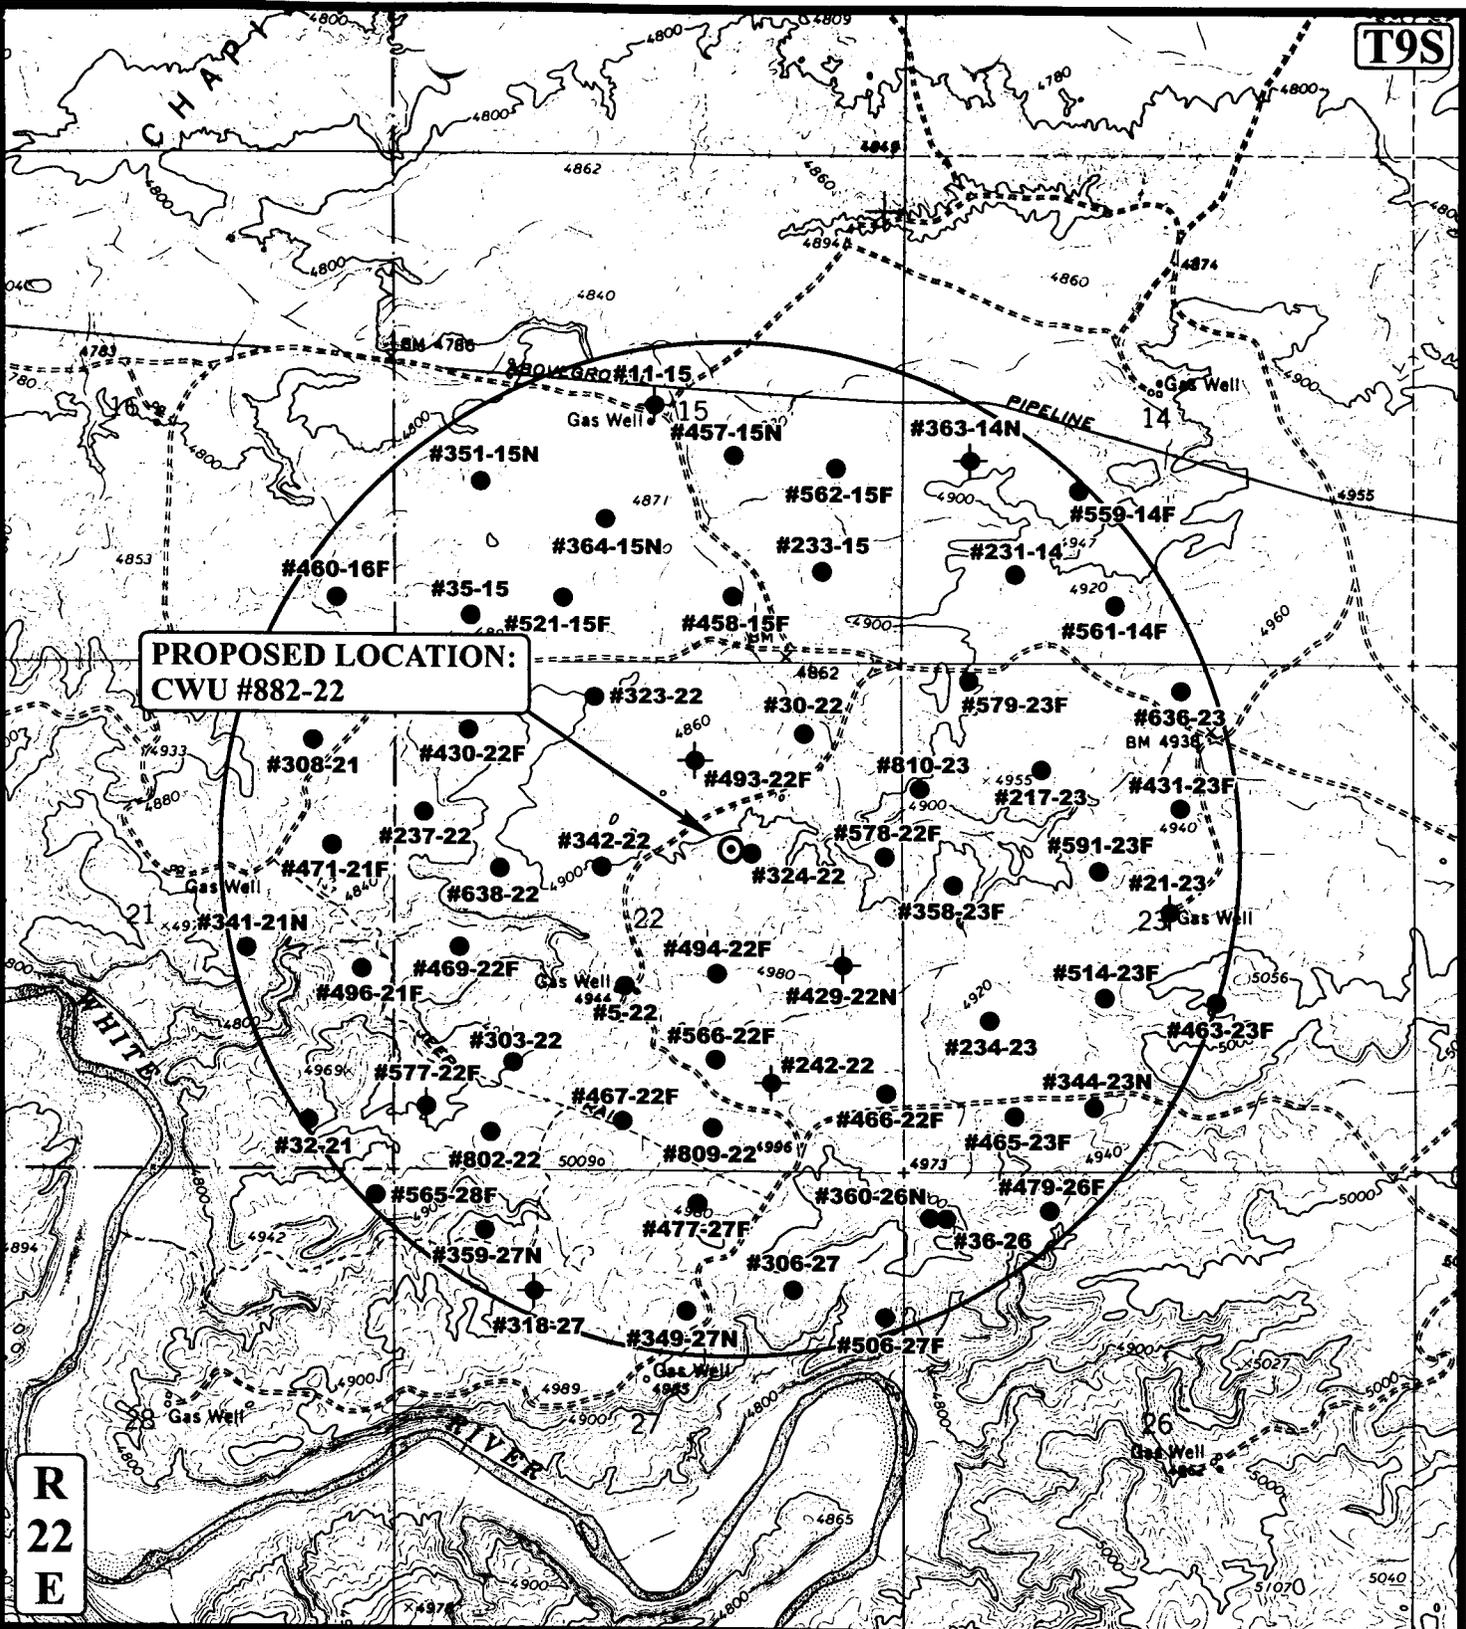

**PROPOSED LOCATION:**  
**CWU #882-22**

**R**  
**22**  
**E**

**LEGEND:**

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- ⬮ SHUT IN WELLS
- ⊕ WATER WELLS
- ⬮ ABANDONED WELLS
- ⬮ TEMPORARILY ABANDONED



**EOG RESOURCES, INC.**

**CWU #882-22**  
**SECTION 22, T9S, R22E, S.L.B.&M.**  
**1936' FNL 1754' FEL**



**Utah Engineering & Land Surveying**  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC** 10 21 03  
**MAP** MONTH DAY YEAR  
 SCALE: 1" = 2000' DRAWN BY: J.L.G. REVISED: 00-00-00



004

WORKSHEET  
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 12/10/2003

API NO. ASSIGNED: 43-047-35397

WELL NAME: CWU 882-22

OPERATOR: EOG RESOURCES INC ( N9550 )

CONTACT: ED TROTTER

PHONE NUMBER: 435-789-4120

PROPOSED LOCATION:

SWNE 22 090S 220E  
SURFACE: 1936 FNL 1754 FEL  
BOTTOM: 1936 FNL 1754 FEL  
UINTAH  
NATURAL BUTTES ( 630 )

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal

LEASE NUMBER: U-0284-A

SURFACE OWNER: 1 - Federal

LATITUDE: 40.02362

PROPOSED FORMATION: BLKHK

LONGITUDE: 109.42244

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]  
(No. NM 2308 )
- Potash (Y/N)
- Oil Shale 190-5 (B) for 190-3 or 190-13
- Water Permit  
(No. 49-1501 )
- RDCC Review (Y/N)  
(Date: \_\_\_\_\_ )
- Fee Surf Agreement (Y/N)


LOCATION AND SITING:

- R649-2-3.
- Unit CHAPITA WELLS
- R649-3-2. General  
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit  
Board Cause No: 179-8  
Eff Date: 8/10/1999  
Siting: Suspends General Siting
- R649-3-11. Directional Drill


COMMENTS: \_\_\_\_\_

STIPULATIONS: 1- Federal Approval

2- OIL SHALE

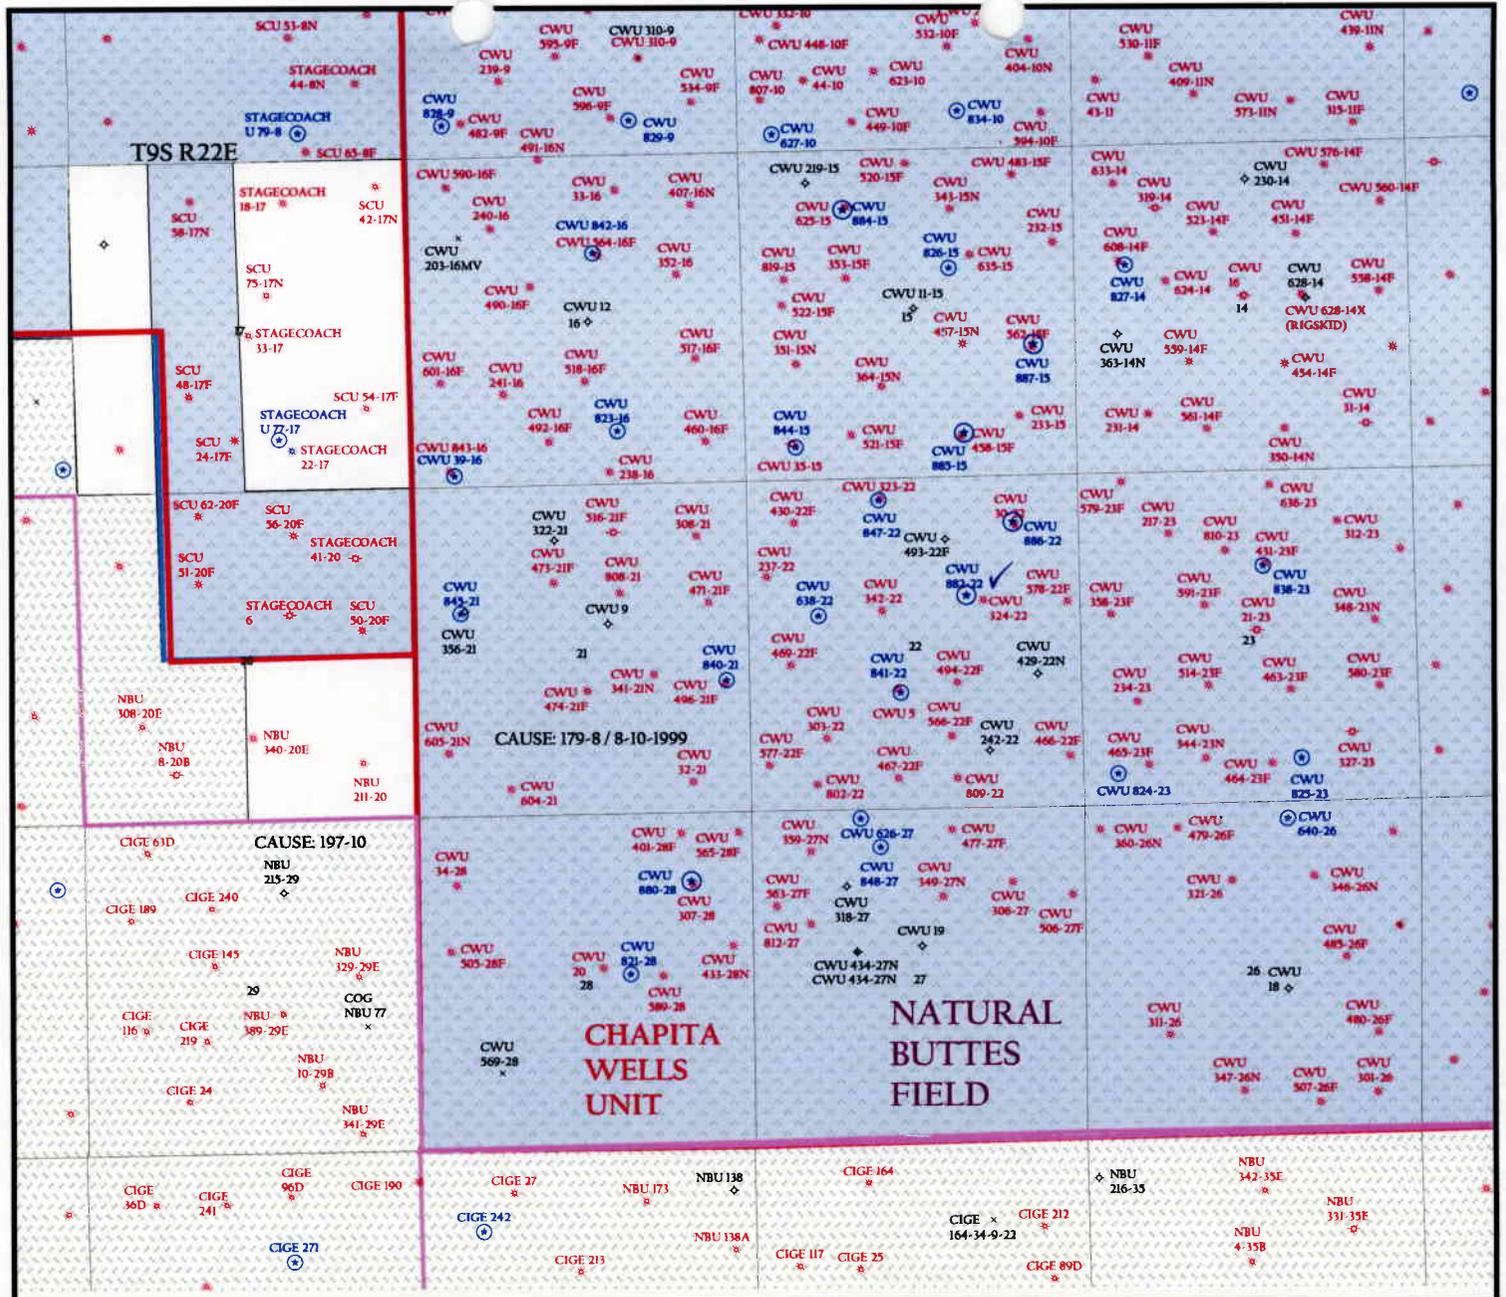

OPERATOR: EOG RESOURCES INC (N9550)  
 SEC. 22 T.9S, R.22E  
 FIELD: NATURAL BUTTES (630)  
 COUNTY: UINTAH  
 CAUSE: 179-8/ 8-10-1999

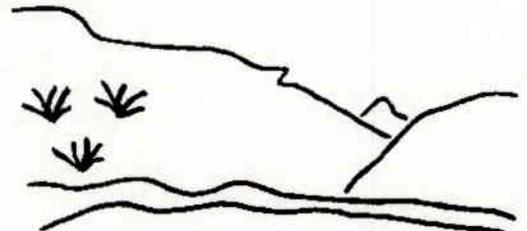

Utah Oil Gas and Mining

- Wells**
- GAS INJECTION
  - GAS STORAGE
  - LOCATION ABANDONED
  - NEW LOCATION
  - PLUGGED & ABANDONED
  - PRODUCING GAS
  - PRODUCING OIL
  - SHUT-IN GAS
  - SHUT-IN OIL
  - TEMP. ABANDONED
  - TEST WELL
  - WATER INJECTION
  - WATER SUPPLY
  - WATER DISPOSAL

- Unit Status**
- EXPLORATORY
  - GAS STORAGE
  - NF PP OIL
  - NF SECONDARY
  - PENDING
  - PI OIL
  - PP GAS
  - PP GEOTHERML
  - PP OIL
  - SECONDARY
  - TERMINATED

- Field Status**
- ABANDONED
  - ACTIVE
  - COMBINED
  - INACTIVE
  - PROPOSED
  - STORAGE
  - TERMINATED



PREPARED BY: DIANA WHITNEY  
 DATE: 11-DECEMBER-2003

# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office

P.O. Box 45155

Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:

3160

(UT-922)

December 11, 2003

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2003 Plan of Development Chapita Wells Unit  
 Uintah County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2003 within the Chapita Wells Unit, Uintah County, Utah.

API#	WELL NAME	LOCATION
(Proposed PZ Mesaverde)		
43-047-35394	CWU 855-15	Sec. 15 T. 9S R. 22E 0662 FSL 1786 FEL
43-047-35395	CWU 887-15	Sec. 15 T. 9S R. 22E 2070 FSL 0687 FEL
43-047-35396	CWU 884-15	Sec. 15 T. 9S R. 22E 0925 FNL 1658 FWL
43-047-35397	CWU 882-22	Sec. 22 T. 9S R. 22E 1936 FNL 1754 FEL
43-047-35398	CWU 886-22	Sec. 22 T. 9S R. 22E 0771 FNL 1019 FEL
43-047-35399	CWU 880-28	Sec. 28 T. 9S R. 22E 1111 FNL 0693 FEL
43-047-35400	CWU 878-34	Sec. 34 T. 9S R. 23E 0659 FSL 2079 FEL
43-047-35401	CWU 877-34	Sec. 34 T. 9S R. 23E 1782 FSL 2038 FWL

This office has no objection to permitting the wells at this time.

/s/ Michael L. Coulthard

bcc: File - Chapita Wells Unit  
 Division of Oil Gas and Mining  
 Agr. Sec. Chron  
 Fluid Chron

MCoulthard:mc:12-11-03



State of Utah  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

1594 West North Temple, Suite 1210  
PO Box 145801  
Salt Lake City, Utah 84114-5801  
(801) 538-5340 telephone  
(801) 359-3940 fax  
(801) 538-7223 TTY  
www.nr.utah.gov

Michael O. Leavitt  
Governor  
Robert L. Morgan  
Executive Director  
Lowell P. Braxton  
Division Director

December 11, 2003

EOG Resources, Inc.  
P O Box 1910  
Vernal, UT 84078

Re: Chapita Wells Unit 882-22 Well, 1936' FNL, 1754' FEL, SW NE, Sec. 22, T. 9 South,  
R. 22 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-35397.

Sincerely,

John R. Baza  
Associate Director

pab  
Enclosures

cc: Uintah County Assessor  
Bureau of Land Management, Vernal District Office

**Operator:** EOG Resources, Inc.  
**Well Name & Number** Chapita Wells Unit 882-22  
**API Number:** 43-047-35397  
**Lease:** U-0284-A

**Location:** SW NE                      **Sec.** 22                      **T.** 9 South                      **R.** 22 East

### Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.


5. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

**UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT**

006

**APPLICATION FOR PERMIT TO DRILL OR REENTER**

1a. TYPE OF WORK <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease serial No.  U-0284-A	
b. TYPE OF WELL <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe name  CHAPITA WELLS UNIT	
2. Name of Operator  EOG RESOURCES, INC.		7. If Unit or CA Agreement, Name and No. CHAPITA WELLS UNIT	
3a. Address P.O. BOX 1910, VERNAL, UT 84078		8. Lease Name and Well No. CHAPITA WELLS UNIT 882-22	
3b. Telephone Number: (435)789-4120		9. API Well No. 43-047-35397	
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface 1936' FNL & 1754' FEL                      SW/NE At proposed prod. Zone		10. Field and pool, or Exploratory NATURAL BUTTES	
14. Distance in miles and direction from nearest town or post office* 17.45 MILES SOUTHEAST OF OURAY, UTAH		11. Sec., T., R., M., or BLK. And survey of area SEC. 22, T9S, R22E, S.L.B.&M.	
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. Unit line, if any)                      1754'		12. County or parish UINTAH	
16. No. of acres in lease                      1240		13. State UTAH	
18. Distance from proposed location* to nearest well, drilling, completed, or applied for, on this lease, ft.                      See Map C		17. Spacing Unit dedicated to this well	
19. Proposed depth                      10,336'		20. BLM/BIA Bond No. on file #NM 2308	
21. Elevations (show whether DF, KDB, RT, GL, etc.) 4930.4 FEET GRADED GROUND		22. Approx. date work will start* UPON APPROVAL	
23. Estimated duration RECEIVED JAN 22 2004		24. Attachments	



DIV. OF OIL, GAS & MINING

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- |                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ol style="list-style-type: none"> <li>1. Well plat certified by a registered surveyor.</li> <li>2. A Drilling Plan</li> <li>3. A Surface Use Plan (if the location is on National Forest System lands, the SUPO shall be filed with the appropriate Forest Service Office.</li> </ol> | <ol style="list-style-type: none"> <li>4. Bond to cover the operations unless covered by an existing bond on file (see item 20 above).</li> <li>5. Operator certification.</li> <li>6. Such other site specific information and/or plans as may be required by the Authorized officer.</li> </ol> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

25. Signature 	Name (Printed/ Typed) Ed Trotter	Date 11-20-2003
Title Agent		
Approved by (Signature) 	Name (Printed/Typed) ED TROTTER	Date 1/13/04
Title Agent		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on reverse)

**CONDITIONS OF APPROVAL ATTACHED**

CONDITIONS OF APPROVAL  
APPLICATION FOR PERMIT TO DRILL

Company/Operator: EOG Resources, Inc.

Well Name & Number: CWU 882-22

Lease Number: U-0284A

API Number: 43-047-35397

Location: SWNE Sec. 22 T.9S R. 22E

Agreement: Chapita Wells Unit

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

**CONDITIONS OF APPROVAL**

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

A. DRILLING PROGRAM

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands to John Mayers of this office **prior to setting the next casing string or requesting plugging orders**. Faxed copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a 5M system (production hole) and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint. Surface casing setting depths are based on ground level elevations only.

The top of the Wasatch formation has been identified at  $\pm 4830'$ , the proposed casing/cementing program will not be adequate to protect this resource. As a minimum requirement, the cement behind the production casing must extend to the top of the Wasatch formation.

All casing strings below the conductor shall be pressure tested to 0.22 psi/ft of casing string length or 1500 psi, whichever is greater but not to exceed 70% of the minimum internal yield.

If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

A cement bond log (CBL) will be run from the production casing shoe to top of the cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after

completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. Two copies of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the AO.

**Please submit to this office, in LAS format, an electronic copy of all logs run on this well. This submission will replace the requirement for submittal of paper logs to the BLM.**

6. Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Written notification of such must be submitted to this office not later than five (5) days following the date on which the well is placed on production.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas

can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-5(d) shall be submitted to the appropriate Field Office within 60 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (1).

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergencies, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within thirty (30) days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling onlease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries and tested for meter accuracy at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, you must contact one of the following individuals:

Ed Forsman (435) 828-7874  
Petroleum Engineer

Kirk Fleetwood (435) 828-7875  
Petroleum Engineer

BLM FAX Machine (435) 781-4410

## EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids.

007

STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER:

U-0284-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

CHAPITA WELLS UNIT

8. WELL NAME and NUMBER:

CHAPITA WELLS UNIT 882-22

9. API NUMBER:

4304735397

10. FIELD AND POOL, OR WILDCAT:

NATURAL BUTTES

1. TYPE OF WELL

OIL WELL

GAS WELL

OTHER \_\_\_\_\_

2. NAME OF OPERATOR:

EOG RESOURCES, INC.

3. ADDRESS OF OPERATOR:

P.O. BOX 1910

CITY VERNAL

STATE UT

ZIP 84078

PHONE NUMBER:

(435) 789-4120

4. LOCATION OF WELL

FOOTAGES AT SURFACE: 1936' FNL, 1754' FEL

COUNTY: UINTAH

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWNE 22 9S 22E S

STATE:

UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input checked="" type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. is requesting authorization to change the TD of the subject well to a depth of 9475 feet. The revised drilling plan is attached.

Approved by the  
Utah Division of  
Oil, Gas and Mining

Date: 08-23-04  
By: [Signature]

RECEIVED

AUG 09 2004

DIV. OF OIL, GAS & MINING

COPY SENT TO OPERATOR

Date: 8-26-04  
Initials: CTO

NAME (PLEASE PRINT) Ed Trotter

TITLE Agent

SIGNATURE [Signature]

DATE 7/7/2004

(This space for State use only)

**EIGHT POINT PLAN**

**CHAPITA WELLS UNIT 882-22**  
**SW/NE, SEC. 22, T9S, R22E, S.L.B.&M.**  
**UINTAH COUNTY, UTAH**

**1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:**

<b>FORMATION</b>	<b>DEPTH (KB)</b>
Green River	1,706'
Wasatch	4,766'
Island	7,236'
KMV Price River	7,421'
KMV Price River Middle	8,106'
KMV Price River Lower	8,921'
Sego	9,346'

EST. TD: **9,475'**

Anticipated BHP 4100 PSI

**3. PRESSURE CONTROL EQUIPMENT:** A 5M BOP will be used on the Production Hole only. (See attached BOP Diagram), Pressure Control Equipment will not be used on the Surface Hole.

**4. CASING PROGRAM:**

<b>HOLE SIZE</b>	<b>INTERVAL</b>	<b>LENGTH</b>	<b>SIZE</b>	<b>WEIGHT</b>	<b>GRADE</b>	<b>THREAD</b>	<b><u>MINIMUM SAFETY FACTOR</u></b>		
							<b><u>COLLAPSE</u></b>	<b><u>BURST</u></b>	<b><u>TENSILE</u></b>
20"	0' - 45'+/- GL	45'+/-	13 3/8"	48.0 #	H-40	ST&C	770 PSI	1730 PSI	322,000#
12 1/4"	45' - 2300'+/- KB	2300' +/-	9 5/8"	36.0 #	J-55	ST&C	2020 PSI	3520 PSI	394,000#
7 7/8"	2300' - TD+/-KB	9475'+/-	4 1/2"	11.6 #	N-80	LT&C	6350 PSI	7780 PSI	223,000#

The 12 1/4" Intermediate hole will be drilled to a total depth of 200' below the base of the Green River lost circulation zone and 9 5/8" casing will be set to that depth. Actual setting depth of the 9 5/8" casing may be less than 2300' in this well.

All casing will be new or inspected.

**5. Float Equipment:**

**CONDUCTOR HOLE PROCEDURE (0-45' Below GL):**

None

**SURFACE HOLE PROCEDURE (45'-2300'):**

Guide Shoe

Insert Float Collar (PDC drillable)

Cents.: 1-5' above shoe, top of jts. #2 and #3 then every 5<sup>th</sup> joint to surface. (15 total)

**PRODUCTION HOLE PROCEDURE 2300'-TD:**

FS, 1 joint of casing, FC, and balance of casing to surface.

**EIGHT POINT PLAN**

**CHAPITA WELLS UNIT 882-22**  
**SW/NE, SEC. 22, T9S, R22E, S.L.B.&M.**  
**UINTAH COUNTY, UTAH**

**6. MUD PROGRAM**

**CONDUCTOR HOLE PROCEDURE (0-45' Below GL):**

Dry or light mud as needed to support drilling by Bucket Rig.

**SURFACE HOLE PROCEDURE (45'-2300'):**

Air, Air Mist and Water (circulate through reserve pit) with Gel/LCM sweeps.

**PRODUCTION HOLE PROCEDURE 2300'-TD:**

2300'- 4500' Water (circulate through reserve pit) with Gel/LCM sweeps.

4500'- 6900' Close in mud system. "Mud up" with **6.0 ppb** Diammonium Phosphate (DAP). Drill with DAP water, POLYPLUS for viscosity and hole cleaning, adding KLA-GARD B for supplemental inhibition. Also sweep hole periodically w/ Durogel / LCM sweeps to clean the hole and seal loss zones. Add additional LCM as hole dictates. Mud weight and vis as needed, water loss – no control.

6900'- TD Discontinue KLA-GARD B. Utilize POLYPAC-R for fluid loss control. Maintain **5.5 ppb** DAP. **Do not mix caustic or lime.** Maintain 7.5-8.5 pH. Weight up system and add vis as hole conditions require. Run LCM sweep periodically to seal off loss zones or more often as hole dictates. Water loss: 20 cc's maximum. Expect increasing gas shows requiring heavier mud weights from top of Island onward. Treat CO<sub>2</sub> contamination with DESCO CF and OSIL (Oxygen scavenger) if mud properties dictate.

**7. VARIANCE REQUESTS:**

- A. EOG Resources, Inc. requests a variance to regulations requiring a straight run blooie line (Where possible, a straight run blooie line will be used).
- B. EOG Resources, Inc. requests a variance to regulations requiring an automatic ignitor or continuous pilot light on the blooie line. (Not required on aerated water system).
- C. EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. To reduce location excavation, the blooie line will be 75' in length.

**8. EVALUATION PROGRAM:**

Logs: Schlumberger Platform Express TD – Surface Casing, with Di-pole Sonic from TD to surface in 1 run.

**EIGHT POINT PLAN**

**CHAPITA WELLS UNIT 882-22**  
**SW/NE, SEC. 22, T9S, R22E, S.L.B.&M.**  
**UINTAH COUNTY, UTAH**

**9. CEMENT PROGRAM:**

**CONDUCTOR HOLE PROCEDURE (0-45' Below GL):**

Cement to surface with Redi-Mix cement

**SURFACE HOLE PROCEDURE (45'-2300'+/-):**

**Option #1: Well circulates or drills with air.**

**Tail: 500'** of Class 'G' mixed at 15.8 ppg w/ 2% CaCl<sub>2</sub> & 0.25 pps Flocele + 35% Excess or Type 5 Cement mixed at 15.6 ppg w/ 2% CaCl<sub>2</sub> & 0.25 pps Flocele + 35% Excess.

**Lead: Hi-Fill Cement** mixed at 11 ppg with 16% Gel, 10#/sx Gilsonite, 3% salt, 3#/sx GR-3 and 0.25 #/sx Flocele plus 35% Excess to get cement returns to surface.

**Option #2: Well does not circulate.**

Class 'G' cement mixed at 15.8 ppg w/ 2% CaCl<sub>2</sub> & 0.25 pps Flocele + 35% Excess or Type 5 Cement mixed at 15.6 ppg w/ 2% CaCl<sub>2</sub> & 0.25 pps Flocele + 35% Excess to 100' above the lost circulation zone and top out with same with 3-4% CaCl<sub>2</sub> to get cement returns to surface.

**PRODUCTION HOLE PROCEDURE 2300'-TD:**

**Lead: 110 sks** 35:65 Poz G w/ 4% D20 (Bentonite), 2% D174 (Extender), 0.2% D65 (Dispersant), 0.2% D46 (Antifoam), 0.75% D112 (Fluid Loss Additive), 0.15% D13 (Retarder), 0.25 pps D29 (cello flakes), mixed at 13.0 ppg, 1.73 cu. ft./sk., 9.06 gps water

**Tail: 190 sks:** 50:50 Poz G w/ 2% D20 (Bentonite), 0.1% D46 (Antifoam), 0.15% D13 (Retarder), 0.2% D167 (Fluid Loss Additive), 0.2% D65 (Dispersant), mixed at 14.1 ppg, 1.28 cu. ft./sk., 5.9 gps water.

**10. ABNORMAL CONDITIONS:**

**SURFACE HOLE (45'-2300')**

**Potential Problems:** Lost circulation below 1800' and minor amounts of gas may be present.

**PRODUCTION HOLE 2300'-TD**

**Potential Problems:** Sloughing shales and key seat development are possible in the Wasatch Formation. CO<sub>2</sub> contamination in the mud is possible in the Price River (Mesa Verde).

**EIGHT POINT PLAN**

**CHAPITA WELLS UNIT 882-22**  
**SW/NE, SEC. 22, T9S, R22E, S.L.B.&M.**  
**UINTAH COUNTY, UTAH**

**11. STANDARD REQUIRED EQUIPMENT:**

- A. Choke Manifold
- B. Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

**12. HAZARDOUS CHEMICALS:**

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.


(Attachment: BOP Schematic Diagram)

## 5000 PSIG DIAGRAM

ANNULAR PREVENTOR AND BOTH RAMS ARE 5000 PSIG RATED.  
 CASING FLANGE IS 11" 5000 PSIG RATED.  
 BOPE 11" 5000 PSIG

### TESTING PROCEDURE:

1. BOPE's will be tested with a professional tester to conform to Onshore Order #2 with retest every 14 days.
2. Blind & Pipe rams will be tested to rated working pressure, 5000 psig.
3. Annular preventor will be tested to 50% of working pressure, 2500 psig.
4. Casing will be tested to 0.22 psi/ft. or 2500 psig. Not to exceed 70% of burst strength, whichever is greater.
5. All lines subject to well pressure will be pressure-tested to the same pressure as blind & pipe rams.
6. All BOPE specifications and configurations will meet Onshore Order #2 requirements for 5000 psig BOPE specifications.

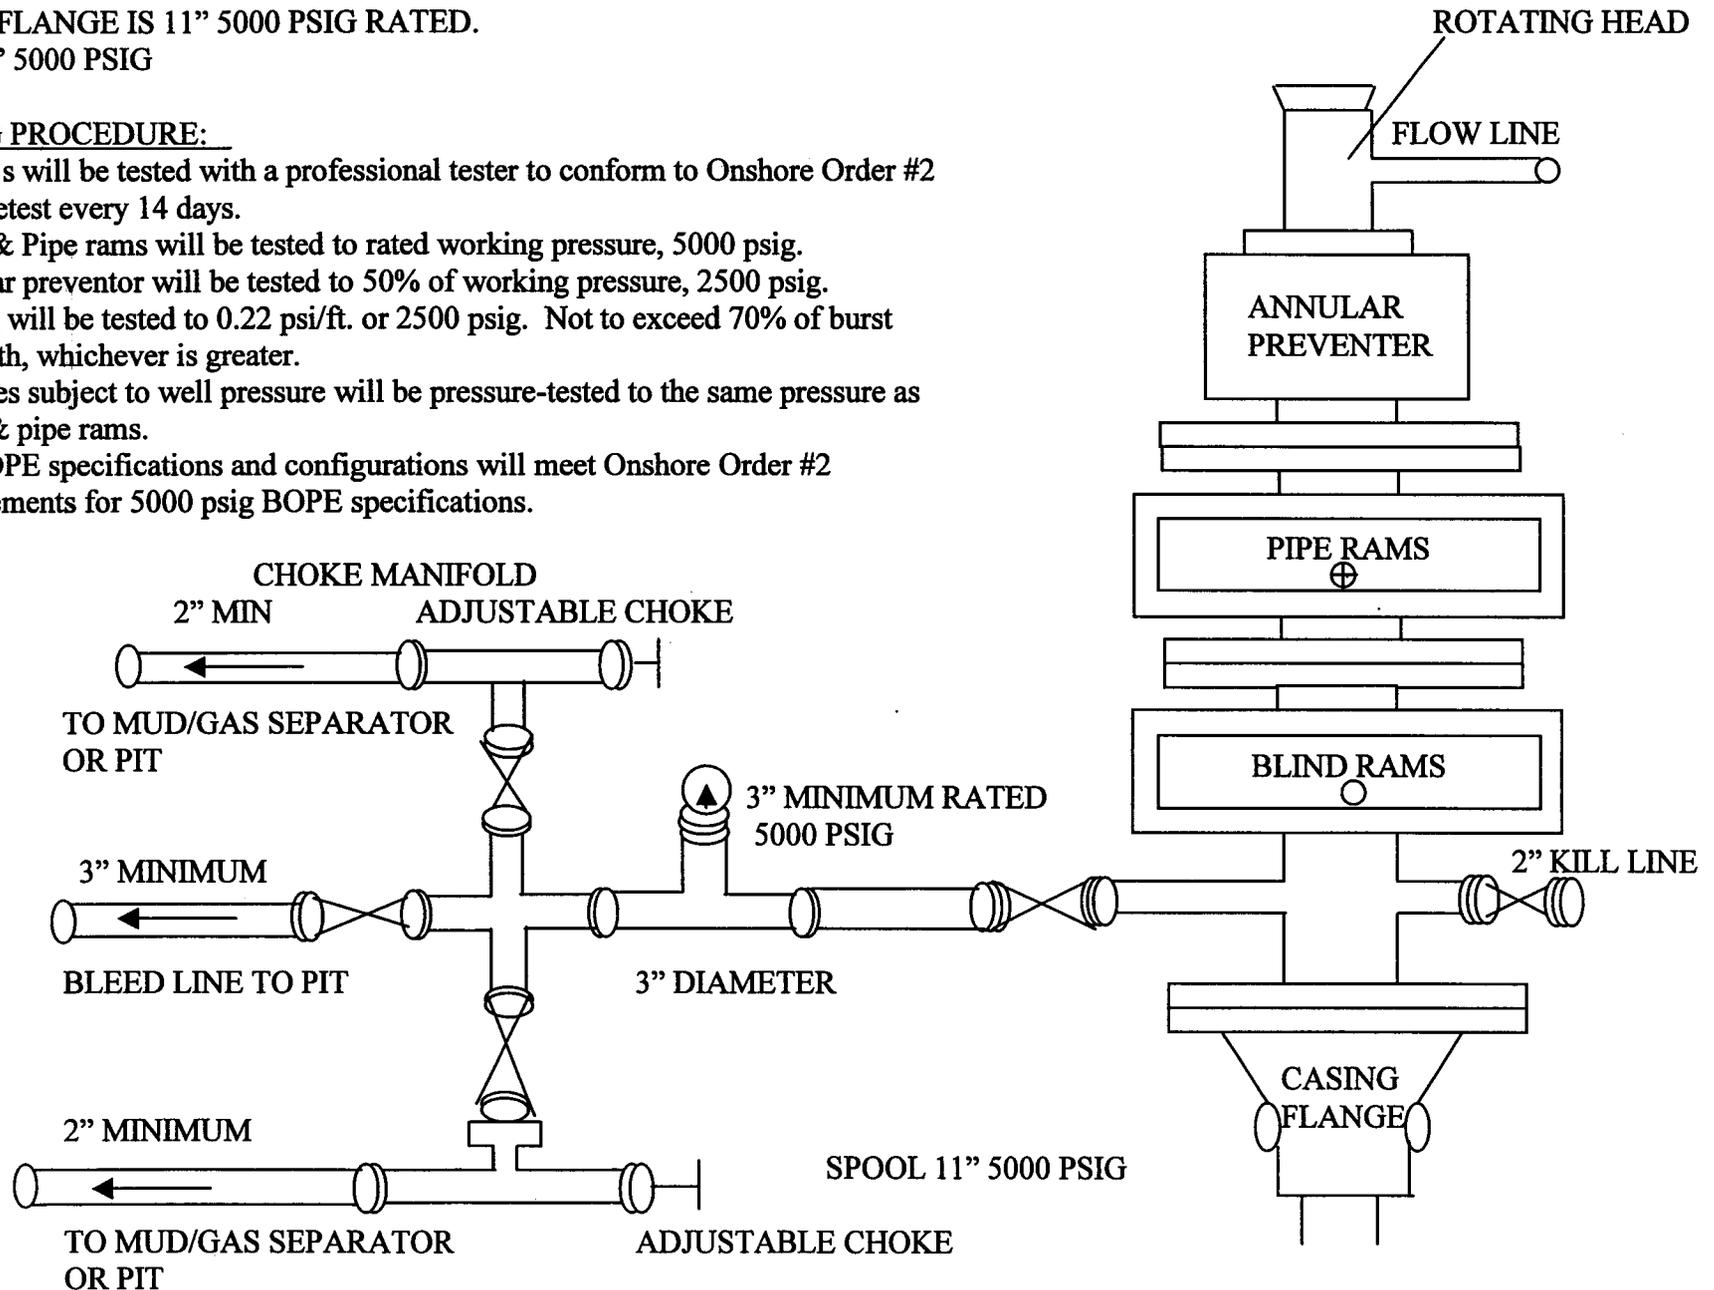

008

STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER:  
**U-0284-A**

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:  
**CHAPITA WELLS UNIT**

8. WELL NAME and NUMBER:  
**CHAPITA WELLS UNIT 882-22**

9. API NUMBER:  
**4304735397**

10. FIELD AND POOL, OR WILDCAT:  
**NATURAL BUTTES**

1. TYPE OF WELL  
OIL WELL  GAS WELL  OTHER \_\_\_\_\_

2. NAME OF OPERATOR:  
**EOG RESOURCES, INC.**

3. ADDRESS OF OPERATOR:  
**P.O. BOX 1910** CITY **VERNAL** STATE **UT** ZIP **84078**

PHONE NUMBER:  
**(435) 789-4120**

4. LOCATION OF WELL  
FOOTAGES AT SURFACE: **1936' FNL, 1754' FEL**

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: **SWNE 22 9S 22E S**

COUNTY: **UINTAH**

STATE: **UTAH**

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____  <input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Extension Request</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.  
**EOG Resources, Inc. is requesting that the APD for the subject well be extended for one year.**

**Approved by the  
Utah Division of  
Oil, Gas and Mining**

Date: 12-08-04  
By: [Signature]

COPY SENT TO OPERATOR  
Date: 12-9-04  
Initials: CHD

NAME (PLEASE PRINT) Ed Trotter TITLE Agent

SIGNATURE [Signature] DATE 12/1/2004

(This space for State use only)

**RECEIVED**  
**DEC 03 2004**  
DIV. OF OIL, GAS & MINING

**Application for Permit to Drill  
Request for Permit Extension  
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

**API:** 4304735397  
**Well Name:** CHAPITA WELLS UNIT 882-22  
**Location:** 1936' FNL, 1754' FEL, SWNE, SEC. 22, T9S, R22E,  
**Company Permit Issued to:** EOG RESOURCES, INC.  
**Date Original Permit Issued:** 12/11/2003

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes  No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes  No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes  No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes  No

Has the approved source of water for drilling changed? Yes  No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes  No

Is bonding still in place, which covers this proposed well? Yes  No

  
\_\_\_\_\_  
Signature

12/1/2004  
\_\_\_\_\_  
Date

Title: Agent  
\_\_\_\_\_

Representing: EOG Resources, Inc.  
\_\_\_\_\_

RECEIVED  
DEC 03 2004  
DIV. OF OIL, GAS & MINING

**DIVISION OF OIL, GAS AND MINING**

**SPUDDING INFORMATION**

Name of Company: EOG RESOURCES INC

Well Name: CWU 882-22

Api No: 43-047-35397 Lease Type: FEDERAL

Section 22 Township 09S Range 22E County UINTAH

Drilling Contractor PETE MARTIN'S RIG # BUCKET

**SPUDED:**

Date 12/29/2004

Time 10:00 AM

How DRY

**Drilling will commence:** \_\_\_\_\_

Reported by DALL COOK

Telephone # 1-435-828-3630

Date 12/29/2004 Signed CHD

STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 6

010

ENTITY ACTION FORM

Operator: EOG RESOURCES Operator Account Number: N 9660  
 Address: P.O. BOX 250  
city BIG PINEY  
state WY zip 83113 Phone Number: (307) 276-3331

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304735029	CHAPITA WELLS UNIT 650-03		NENW	3	9S	22E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
A	99999	14473	1/4/2005			1/4/05	
Comments: <u>PRRV = MVRD</u> <b>CONFIDENTIAL</b>							

K

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304735253	NATURAL BUTTES 537-18E		NWSE	18	10S	21E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
A	99999	2900	12/30/2004			1/6/04	
Comments: <u>WSTC = WSMVD</u>							

K

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304735397	CHAPITA WELLS UNIT 882-22		SWNE	22	9S	22E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
A	99999	13650	12/29/2004			1/4/05	
Comments: <u>PRRV = MVRD</u>							

K

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Kaylene R. Gardner

Name (Please Print)

*Kaylene R. Gardner*  
Signature

Regulatory Assistant

1/4/2005

Title

Date

(9/2000)

RECEIVED

JAN 04 2005

DIV. OF OIL, GAS & MINING

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB NO. 1004-0135  
Expires: November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.*

011

5. Lease Serial No.  
U-0284-A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.  
CHAPITA WELLS UNI

8. Well Name and No.  
CHAPITA WELLS UNIT 882-22

9. API Well No. *43-047*  
~~83017~~-35397

10. Field and Pool, or Exploratory  
NATURAL BUTTES

11. County or Parish, and State  
UINTAH COUNTY, UT

**SUBMIT IN TRIPLICATE - Other instructions on reverse side.**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
EOG RESOURCES, INC. Contact: KAYLENE R GARDNER  
E-Mail: KAYLENE\_GARDNER@EOGRESOUR

3a. Address  
P.O. BOX 4022  
BIG PINEY, WY 83113

3b. Phone No. (include area code)  
Ph: 307-276-3331 Ext: 4842

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
Sec 22 T9S R22E SWNE 1936FNL 1754FEL  
40.02344 N Lat, 109.42223 W Lon

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Well Spud
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. spud a 20" surface hole at the referenced location 12/29/2004 at 10:00 a.m. The contractor was Pete Martin's Bucket Rig. Dall Cook, representative for EOG, notified Ed Forsman of the Vernal BLM office and Carol Daniels of the Utah Division of Oil Gas and Mining of the spud 12/29/2004 @ 8:30 a.m.

14. I hereby certify that the foregoing is true and correct.  
**Electronic Submission #52598 verified by the BLM Well Information System For EOG RESOURCES, INC., sent to the Vernal**

Name (Printed/Typed) KAYLENE R GARDNER Title REGULATORY ASSISTANT

Signature (Electronic Submission) Date 01/04/2005

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved By \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office \_\_\_\_\_

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**\*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED**

RECEIVED  
JAN 07 2005  
DIV. OF OIL, GAS & MINING

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB NO. 1004-0135  
Expires: November 30, 2000

012

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.*

5. Lease Serial No.  
U-0284-A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.  
CHAPITA WELLS UNI

8. Well Name and No.  
CHAPITA WELLS UNIT 882-22

9. API Well No.  
833047-35397

10. Field and Pool, or Exploratory  
NATURAL BUTTES

11. County or Parish, and State  
UINTAH COUNTY, UT

**SUBMIT IN TRIPLICATE - Other instructions on reverse side.**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
EOG RESOURCES, INC. Contact: KAYLENE R GARDNER  
E-Mail: KAYLENE\_GARDNER@EOGRESOUR

3a. Address  
P.O. BOX 250  
BIG PINEY, WY 83113

3b. Phone No. (include area code)  
Ph: 307-276-3331 Ext: 4842

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
Sec 22 T9S R22E SWNE 1936FNL 1754FEL  
40.02344 N Lat, 109.42223 W Lon

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input checked="" type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. requests authorization for disposal of produced water from the referenced well to any of the following locations.

1. Natural Buttes Unit 21-20B SWD.
2. Ace Disposal
3. RN Industries.

**Accepted by the  
Utah Division of  
Oil, Gas and Mining  
FOR RECORD ONLY**

14. I hereby certify that the foregoing is true and correct.  
**Electronic Submission #52597 verified by the BLM Well Information System  
For EOG RESOURCES, INC., sent to the Vernal**

Name (Printed/Typed) KAYLENE R GARDNER Title REGULATORY ASSISTANT

Signature (Electronic Submission) Date 01/04/2005

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved By \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office \_\_\_\_\_

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**\*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED**

**RECEIVED  
JAN 07 2005**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

013

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

**SUBMIT IN TRIPLICATE- Other instructions on reverse side.**

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. U-0284-A
2. Name of Operator EOG RESOURCES, INC.		6. If Indian, Allottee or Tribe Name
3a. Address P.O. BOX 250 Big Piney WY, 83113	3b. Phone No. (include area code) 307-276-3331	7. If Unit or CA/Agreement, Name and/or No. CHAPITA WELLS UNIT
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) SECTION 22, T9S, R22E SW/NE 1936 FNL 1754 FEL 40.023442 LAT 109.422231 LON		8. Well Name and No. CHAPITA WELLS 882-22
		9. API Well No. 43-047-35397
		10. Field and Pool, or Exploratory Area NATURAL BUTTES
		11. County or Parish, State UINTAH COUNTY, UT


**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <b>DRILLING</b>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<b>OPERATIONS</b>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

No drilling activity has occurred since spud 12/29/2004.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) Kaylene R. Gardner	Title Regulatory Assistant
Signature 	Date 01/21/2005

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office _____	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

RECEIVED

JAN 24 2005

DIV. OF OIL, GAS & MINING

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires: March 31, 2007

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

**014**

<b>SUBMIT IN TRIPLICATE- Other instructions on reverse side.</b>		5. Lease Serial No. <b>U-0284-A</b>
1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		6. If Indian, Allottee or Tribe Name
2. Name of Operator <b>EOG RESOURCES, INC.</b>		7. If Unit or CA/Agreement, Name and/or No. <b>CHAPITA WELLS UNIT</b>
3a. Address <b>P.O. BOX 250 Big Piney WY, 83113</b>	3b. Phone No. (include area code) <b>307-276-3331</b>	8. Well Name and No. <b>CHAPITA WELLS 882-22</b>
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) <b>SECTION 22, T9S, R22E SW/NE 1936 FNL 1754 FEL 40.023442 LAT 109.422231 LON</b>		9. API Well No. <b>43-047-35397</b>
		10. Field and Pool, or Exploratory Area <b>NATURAL BUTTES</b>
		11. County or Parish, State <b>UINTAH COUNTY, UT</b>

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**


TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <b>DRILLING</b>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<b>OPERATIONS</b>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

No drilling activity has occurred since spud 12/29/2004.

**RECEIVED**  
**JAN 31 2005**  
DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) <b>Kaylene R. Gardner</b>	Title <b>Regulatory Assistant</b>
Signature 	Date <b>01/28/2005</b>

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires: March 31, 2007

015

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

<b>SUBMIT IN TRIPLICATE- Other instructions on reverse side.</b>		5. Lease Serial No. <b>U-0284-A</b>
1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		6. If Indian, Allottee or Tribe Name
2. Name of Operator <b>EOG RESOURCES, INC.</b>		7. If Unit or CA/Agreement, Name and/or No. <b>CHAPITA WELLS UNIT</b>
3a. Address <b>P.O. BOX 250 Big Piney WY, 83113</b>	3b. Phone No. (include area code) <b>307-276-3331</b>	8. Well Name and No. <b>CHAPITA WELLS 882-22</b>
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) <b>SECTION 22, T9S, R22E SW/NE 1936 FNL 1754 FEL 40.023442 LAT 109.422231 LON</b>		9. API Well No. <b>43-047-35397</b>
		10. Field and Pool, or Exploratory Area <b>NATURAL BUTTES</b>
		11. County or Parish, State <b>UINTAH COUNTY, UT</b>

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <b>DRILLING</b>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<b>OPERATIONS</b>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	


13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

No drilling activity has occurred since spud 12/29/2004.

RECEIVED

FEB 08 2005

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct	
Name (Printed/Typed) <b>Kaylene R. Gardner</b>	Title <b>Regulatory Assistant</b>
Signature 	Date <b>02/04/2005</b>

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office _____	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires: March 31, 2007

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

016

<b>SUBMIT IN TRIPLICATE- Other instructions on reverse side.</b>		5. Lease Serial No. <b>U-0284-A</b>
1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		6. If Indian, Allottee or Tribe Name
2. Name of Operator <b>EOG RESOURCES, INC.</b>		7. If Unit or CA/Agreement, Name and/or No. <b>CHAPITA WELLS UNIT</b>
3a. Address <b>P.O. BOX 250 Big Piney WY, 83113</b>	3b. Phone No. (include area code) <b>307-276-3331</b>	8. Well Name and No. <b>CHAPITA WELLS 882-22</b>
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) <b>SECTION 22, T9S, R22E SW/NE 1936 FNL 1754 FEL 40.023442 LAT 109.422231 LON</b>		9. API Well No. <b>43-047-35397</b>
		10. Field and Pool, or Exploratory Area <b>NATURAL BUTTES</b>
		11. County or Parish, State <b>UINTAH COUNTY, UT</b>


**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <b>DRILLING</b>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<b>OPERATIONS</b>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomplate in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

**Please see the attached well chronology report for drilling operations from 2/04/2005 - 2/11/2005.**

14. I hereby certify that the foregoing is true and correct  
Name (Printed/Typed) **Kaylene R. Gardner** Title **Regulatory Assistant**

Signature  Date **02/11/2005**

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by _____ Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Title _____	Date _____
	Office _____	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**RECEIVED**

**FEB 15 2005**

DIV. OF OIL, GAS & MINING



## WELL CHRONOLOGY REPORT

Report Generated On: 02-11-2005

<b>Well Name</b>	CWU 882-22	<b>Well Type</b>	DEVG	<b>Division</b>	DENVER
<b>Field</b>	CHAPITA WELLS DEEP	<b>API #</b>	43-047-35397	<b>Well Class</b>	DRIL
<b>County, State</b>	UINTAH, UT	<b>Spud Date</b>		<b>Class Date</b>	
<b>Tax Credit</b>	N	<b>TVD / MD</b>	9,475/ 9,475	<b>Property #</b>	053629
<b>Water Depth</b>	0	<b>Last CSG</b>	9.625	<b>Shoe TVD / MD</b>	2,432/ 2,432
<b>KB / GL Elev</b>	4,945/ 4,930				
<b>Location</b>	Section 22, T9S, R22E, SWNE, 1936 FNL & 1754 FEL				

<b>Event No</b>	1.0	<b>Description</b>	DRILL & COMPLETE		
<b>Operator</b>	EOG RESOURCES, INC	<b>WI %</b>	27.5	<b>NRI %</b>	28.65

<b>AFE No</b>	302540	<b>AFE Total</b>		<b>DHC / CWC</b>	
<b>Rig Contr</b>	TRUE	<b>Rig Name</b>	TRUE #15	<b>Start Date</b>	12-15-2003
				<b>Release Date</b>	
12-15-2003      Reported By					
<b>Daily Costs: Drilling</b>	\$0	<b>Completion</b>	\$0	<b>Daily Total</b>	\$0
<b>Cum Costs: Drilling</b>	\$0	<b>Completion</b>	\$0	<b>Well Total</b>	\$0
<b>MD</b>	0	<b>TVD</b>	0	<b>Progress</b>	0
				<b>Days</b>	0
				<b>MW</b>	0.0
				<b>Visc</b>	0.0
<b>Formation :</b>		<b>PBTD : 0.0</b>		<b>Perf :</b>	<b>PKR Depth : 0.0</b>

**Activity at Report Time: LOCATION DATA**

Start	End	Hrs	Activity Description
06:00	06:00	24.0	LOCATION DATA
			1936' FNL & 1754' FEL (SW/NE)
			SECTION 22, T9S, R22E
			UINTAH COUNTY, UTAH
			TRUE RIG #15
			OBJECTIVE: 9475' MESAVERDE
			CHAPITA WELLS DEEP PROSPECT
			CHAPITA WELLS UNIT
			DW/GAS
			LEASE: U-0284-A
			ELEVATION: 4932' NAT GL, 4930' PREP GL, 4945 KB (15')
			EOG WI 27.50%, NRI 28.65%
			WESTPORT WI 50%
			ST MARY WI 22.5%

<b>02-08-2005</b>	<b>Reported By</b>	ED TROTTER
<b>Daily Costs: Drilling</b>	<b>Completion</b>	<b>Daily Total</b>

**Cum Costs: Drilling****Completion****Well Total**

<b>MD</b>	2,470	<b>TVD</b>	2,470	<b>Progress</b>	0	<b>Days</b>	0	<b>MW</b>	0.0	<b>Visc</b>	0.0
-----------	-------	------------	-------	-----------------	---	-------------	---	-----------	-----	-------------	-----

**Formation :****PBTD : 0.0****Perf :****PKR Depth : 0.0****Activity at Report Time: WORT**

<b>Start</b>	<b>End</b>	<b>Hrs</b>	<b>Activity Description</b>
--------------	------------	------------	-----------------------------

06:00	06:00	24.0	MIRU BILL JR'S BUCKET RIG. SPURRED 20" HOLE @ 10:00 AM, 12/29/04.
-------	-------	------	-------------------------------------------------------------------

DRILLED 20" HOLE TO 45'. RAN 45' OF 13 3/8", 54#, H-40 CONDUCTOR PIPE AND CEMENTED TO SURFACE. DRILLED AND LINED RAT AND MOUSE HOLES. RD BUCKET RIG.

MIRU BILL JR'S AIR RIG. DRILLED 12 1/4" HOLE TO 2470'. RU WIRELINE UNIT AND RAN DIRECTIONAL SURVEY, SURVEY 1.5 DEGREE @ 2460'. RAN 59 JTS (2417.20') OF 9-5/8", 36.0#/FT, J-55, ST&C CASING. LANDED @ 2431.70' KB. RU BIG 4 CEMENTERS. PRESSURE TESTED LINES AND CEMENT VALVE TO 1500 PSIG. PUMP 170 BBLs WATER AHEAD. MIXED & PUMPED 20 BBLs GELLED WATER AHEAD OF CEMENT.

LEAD CEMENT: MIXED & PUMPED 220 SX PREMIUM CEMENT W/16% GEL & 10#/SX GILSONITE-3% SALT, 2% CACL2 & 1/4 #/SX FLOCELE. MIXED CEMENT @ 11.0 PPG W/YIELD OF 3.82 CF/SX (149.70 BBLs).

TAIL CEMENT: MIXED & PUMPED 200 SX PREMIUM CEMENT W/2% CACL2 & 1/4 #/SX FLOCELE. MIXED CEMENT @ 15.6 PPG W/YIELD OF 1.18 CF/SX (40.9 BBLs). DISPLACED CEMENT W/184.2 BBLs WATER, BUMPED PLUG W/1100#, CHECKED FLOAT, FLOAT HELD, SHUT-IN CASING VALVE. HAD CEMENT RETURNS TO SURFACE BUT FELL BACK. RAN 1" PIPE DOWN ANNULUS.

TOP OUT #1: MIXED & PUMPED 100 SX PREMIUM CEMENT W/2% CACL2 & 1/4 #/SX FLOCELE. MIXED CEMENT @ 16.0 PPG W/YIELD OF 1.18 CF/SX (21.00 BBLs). HAD CEMENT RETURNS TO SURFACE, CEMENT FELL BACK.

TOP OUT #2: MIXED & PUMPED 150 SX PREMIUM CEMENT W/2% CACL2 & 1/4 #/SX FLOCELE. MIXED CEMENT @ 16.0 PPG W/YIELD OF 1.18 CF/SX (30.7 BBLs). HAD CEMENT RETURNS TO SURFACE, CEMENT STAYED AT SURFACE.

TOP OUT #3: MIXED & PUMPED 100 SX PREMIUM CEMENT W/2% CACL2 & 1/4 #/SX FLOCELE. MIXED CEMENT @ 16.0 PPG W/YIELD OF 1.18 CF/SX (21.00 BBLs). HAD CEMENT RETURNS TO SURFACE, CEMENT FELL BACK.

TOP OUT #4: MIXED & PUMPED 150 SX PREMIUM CEMENT W/2% CACL2 & 1/4 #/SX FLOCELE. MIXED CEMENT @ 16.0 PPG W/YIELD OF 1.18 CF/SX (30.7 BBLs). HAD 5 BBLs CEMENT RETURNS TO SURFACE, CEMENT STAYED AT SURFACE.

TOP OUT #5: MIXED & PUMPED 100 SX PREMIUM CEMENT W/2% CACL2 & 1/4 #/SX FLOCELE. MIXED CEMENT @ 16.0 PPG W/YIELD OF 1.18 CF/SX (20.5 BBLs). HAD 6 BBLs CEMENT RETURNS TO SURFACE, CEMENT STAYED AT SURFACE.

RD BIG 4 CEMENTERS. PREPARED LOCATION FOR ROTARY RIG. WORT. WILL DROP FROM REPORT UNTIL FURTHER ACTIVITY.

DALL COOK NOTIFIED ED FORSMAN W/BLM & CAROL DANIELS W/UOGM AT 8:30 AM, 12/29/04 OF SPUDDING WELL.

8 CENTRALIZERS: ON 1ST, 2ND & 3RD COLLARS AND EVERY 5TH COLLAR.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

017

**SUBMIT IN TRIPLICATE- Other instructions on reverse side.**

1. Type of Well  
 Oil Well     Gas Well     Other

2. Name of Operator **EOG RESOURCES, INC.**

3a. Address  
**P.O. BOX 250 Big Piney WY, 83113**

3b. Phone No. (include area code)  
**307-276-3331**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**SECTION 22, T9S, R22E SW/NE 1936 FNL 1754 FEL 40.023442 LAT 109.422231 LON**

5. Lease Serial No.  
**U-0284-A**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.  
**CHAPITA WELLS UNIT**

8. Well Name and No.  
**CHAPITA WELLS 882-22**

9. API Well No.  
**43-047-35397**

10. Field and Pool, or Exploratory Area  
**NATURAL BUTTES**

11. County or Parish, State  
**UINTAH COUNTY, UT**

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <b>DRILLING</b>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<b>OPERATIONS</b>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

**Please see the attached well chronology report for drilling operations from 2/11/2005 - 2/18/2005.**

RECEIVED

FEB 24 2005


DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct  
 Name (Printed/Typed)

**Kaylene R. Gardner**

Title **Regulatory Assistant**

Signature



Date

**02/18/2005**

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)



## WELL CHRONOLOGY REPORT

Report Generated On: 02-18-2005

<b>Well Name</b>	CWU 882-22	<b>Well Type</b>	DEVG	<b>Division</b>	DENVER
<b>Field</b>	CHAPITA WELLS DEEP	<b>API #</b>	43-047-35397	<b>Well Class</b>	DRIL
<b>County, State</b>	UINTAH, UT	<b>Spud Date</b>		<b>Class Date</b>	
<b>Tax Credit</b>	N	<b>TVD / MD</b>	9,475 / 9,475	<b>Property #</b>	053629
<b>Water Depth</b>	0	<b>Last CSG</b>	9.625	<b>Shoe TVD / MD</b>	2,432 / 2,432
<b>KB / GL Elev</b>	4,945 / 4,930				
<b>Location</b>	Section 22, T9S, R22E, SWNE, 1936 FNL & 1754 FEL				

<b>Event No</b>	1.0	<b>Description</b>	DRILL & COMPLETE		
<b>Operator</b>	EOG RESOURCES, INC	<b>WI %</b>	27.5	<b>NRI %</b>	28.65

<b>AFE No</b>		<b>AFE Total</b>		<b>DHC / CWC</b>	
<b>Rig Contr</b>	TRUE	<b>Rig Name</b>	TRUE #15	<b>Start Date</b>	12-15-2003
<b>12-15-2003</b>	<b>Reported By</b>			<b>Release Date</b>	
<b>Daily Costs: Drilling</b>	\$0	<b>Completion</b>	\$0	<b>Daily Total</b>	\$0
<b>Cum Costs: Drilling</b>	\$0	<b>Completion</b>	\$0	<b>Well Total</b>	\$0
<b>MD</b>	0	<b>TVD</b>	0	<b>Progress</b>	0
<b>Days</b>	0	<b>MW</b>	0.0	<b>Visc</b>	0.0
<b>Formation :</b>		<b>PBTD : 0.0</b>		<b>Perf :</b>	
				<b>PKR Depth : 0.0</b>	

**Activity at Report Time: LOCATION DATA**

Start	End	Hrs	Activity Description
06:00	06:00	24.0	LOCATION DATA
			1936' FNL & 1754' FEL (SW/NE)
			SECTION 22, T9S, R22E
			UINTAH COUNTY, UTAH
			TRUE RIG #15
			OBJECTIVE: 9475' MESAVERDE
			CHAPITA WELLS DEEP PROSPECT
			CHAPITA WELLS UNIT
			DW/GAS
			LEASE: U-0284-A
			ELEVATION: 4932' NAT GL, 4930' PREP GL, 4945 KB (15')
			EOG WI 27.50%, NRI 28.65%
			WESTPORT WI 50%
			ST MARY WI 22.5%

<b>02-08-2005</b>	<b>Reported By</b>	ED TROTTER
<b>Daily Costs: Drilling</b>	<b>Completion</b>	<b>Daily Total</b>

Cum Costs: Drilling			Completion			Well Total					
MD	2,470	TVD	2,470	Progress	0	Days	0	MW	0.0	Visc	0.0
Formation :			PBT D : 0.0			Perf :			PKR Depth : 0.0		
Activity at Report Time: WORT											

Start	End	Hrs	Activity Description
-------	-----	-----	----------------------

06:00	06:00	24.0	MIRU BILL JR'S BUCKET RIG. SPUDED 20" HOLE @ 10:00 AM, 12/29/04.
-------	-------	------	------------------------------------------------------------------

DRILLED 20" HOLE TO 45'. RAN 45' OF 13 3/8", 54#, H-40 CONDUCTOR PIPE AND CEMENTED TO SURFACE. DRILLED AND LINED RAT AND MOUSE HOLES. RD BUCKET RIG.

MIRU BILL JR'S AIR RIG. DRILLED 12 1/4" HOLE TO 2470'. RU WIRELINE UNIT AND RAN DIRECTIONAL SURVEY, SURVEY 1.5 DEGREE @ 2460'. RAN 59 JTS (2417.20') OF 9-5/8", 36.0#/FT, J-55, ST&C CASING. LANDED @ 2431.70' KB. RU BIG 4 CEMENTERS. PRESSURE TESTED LINES AND CEMENT VALVE TO 1500 PSIG. PUMP 170 BBLs WATER AHEAD. MIXED & PUMPED 20 BBLs GELLED WATER AHEAD OF CEMENT.

LEAD CEMENT: MIXED & PUMPED 220 SX PREMIUM CEMENT W/16% GEL & 10#/SX GILSONITE-3% SALT, 2% CaCl<sub>2</sub> & 1/4 #/SX FLOCELE. MIXED CEMENT @ 11.0 PPG W/YIELD OF 3.82 CF/SX (149.70 BBLs).

TAIL CEMENT: MIXED & PUMPED 200 SX PREMIUM CEMENT W/2% CaCl<sub>2</sub> & 1/4 #/SX FLOCELE. MIXED CEMENT @ 15.6 PPG W/YIELD OF 1.18 CF/SX (40.9 BBLs). DISPLACED CEMENT W/184.2 BBLs WATER, BUMPED PLUG W/1100#, CHECKED FLOAT, FLOAT HELD, SHUT-IN CASING VALVE. HAD CEMENT RETURNS TO SURFACE BUT FELL BACK. RAN 1" PIPE DOWN ANNULUS.

TOP OUT #1: MIXED & PUMPED 100 SX PREMIUM CEMENT W/2% CaCl<sub>2</sub> & 1/4 #/SX FLOCELE. MIXED CEMENT @ 16.0 PPG W/YIELD OF 1.18 CF/SX (21.00 BBLs). HAD CEMENT RETURNS TO SURFACE, CEMENT FELL BACK.

TOP OUT #2: MIXED & PUMPED 150 SX PREMIUM CEMENT W/2% CaCl<sub>2</sub> & 1/4 #/SX FLOCELE. MIXED CEMENT @ 16.0 PPG W/YIELD OF 1.18 CF/SX (30.7 BBLs). HAD CEMENT RETURNS TO SURFACE, CEMENT STAYED AT SURFACE.

TOP OUT #3: MIXED & PUMPED 100 SX PREMIUM CEMENT W/2% CaCl<sub>2</sub> & 1/4 #/SX FLOCELE. MIXED CEMENT @ 16.0 PPG W/YIELD OF 1.18 CF/SX (21.00 BBLs). HAD CEMENT RETURNS TO SURFACE, CEMENT FELL BACK.

TOP OUT #4: MIXED & PUMPED 150 SX PREMIUM CEMENT W/2% CaCl<sub>2</sub> & 1/4 #/SX FLOCELE. MIXED CEMENT @ 16.0 PPG W/YIELD OF 1.18 CF/SX (30.7 BBLs). HAD 5 BBLs CEMENT RETURNS TO SURFACE, CEMENT STAYED AT SURFACE.

TOP OUT #5: MIXED & PUMPED 100 SX PREMIUM CEMENT W/2% CaCl<sub>2</sub> & 1/4 #/SX FLOCELE. MIXED CEMENT @ 16.0 PPG W/YIELD OF 1.18 CF/SX (20.5 BBLs). HAD 6 BBLs CEMENT RETURNS TO SURFACE, CEMENT STAYED AT SURFACE.

RD BIG 4 CEMENTERS. PREPARED LOCATION FOR ROTARY RIG. WORT. WILL DROP FROM REPORT UNTIL FURTHER ACTIVITY.

DALL COOK NOTIFIED ED FORSMAN W/BLM & CAROL DANIELS W/UOGM AT 8:30 AM, 12/29/04 OF SPUDDING WELL.

8 CENTRALIZERS: ON 1ST, 2ND & 3RD COLLARS AND EVERY 5TH COLLAR.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

018

**SUBMIT IN TRIPLICATE- Other instructions on reverse side.**

1. Type of Well  
 Oil Well     Gas Well     Other

2. Name of Operator    **EOG RESOURCES, INC.**

3a. Address    **P.O. BOX 250 Big Piney WY, 83113**

3b. Phone No. (include area code)  
**307-276-3331**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**SECTION 22, T9S, R22E SW/NE 1936 FNL 1754 FEL 40.023442 LAT 109.422231 LON**

5. Lease Serial No.  
**U-0284-A**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.  
**CHAPITA WELLS UNIT**

8. Well Name and No.  
**CHAPITA WELLS 882-22**

9. API Well No.  
**43-047-35397**

10. Field and Pool, or Exploratory Area  
**NATURAL BUTTES**

11. County or Parish, State  
**UINTAH COUNTY, UT**

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION				
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off	
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity	
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <b>DRILLING</b>	
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<b>OPERATIONS</b>	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal		

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Please see the attached well chronology report for drilling operations from 2/18/2005 - 2/25/2005.

**RECEIVED**  
**MAR 01 2005**  
 DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)    **Kaylene R. Gardner**    Title    **Regulatory Assistant**

Signature    *Kaylene R. Gardner*    Date    **02/25/2005**

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Office \_\_\_\_\_

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)



**WELL CHRONOLOGY  
REPORT**

Report Generated On: 02-25-2005

<b>Well Name</b>	CWU 882-22	<b>Well Type</b>	DEVG	<b>Division</b>	DENVER
<b>Field</b>	CHAPITA WELLS DEEP	<b>API #</b>	43-047-35397	<b>Well Class</b>	DRIL
<b>County, State</b>	UINTAH, UT	<b>Spud Date</b>	02-19-2005	<b>Class Date</b>	
<b>Tax Credit</b>	N	<b>TVD / MD</b>	9,475/ 9,475	<b>Property #</b>	053629
<b>Water Depth</b>	0	<b>Last CSG</b>	9.625	<b>Shoe TVD / MD</b>	2,432/ 2,432
<b>KB / GL Elev</b>	4,945/ 4,930				
<b>Location</b>	Section 22, T9S, R22E, SWNE, 1936 FNL & 1754 FEL				

<b>Event No</b>	1.0	<b>Description</b>	DRILL & COMPLETE		
<b>Operator</b>	EOG RESOURCES, INC	<b>WI %</b>	27.5	<b>NRI %</b>	28.65

AFE No	AFE Total		DHC / CWC				
<b>Rig Contr</b>	TRUE	<b>Rig Name</b>	TRUE #15	<b>Start Date</b>	02-13-2005	<b>Release Date</b>	
<b>Rig Contr</b>	TRUE	<b>Rig Name</b>	TRUE #15	<b>Start Date</b>	12-15-2003	<b>Release Date</b>	
<b>12-15-2003</b>	<b>Reported By</b>						
<b>Daily Costs: Drilling</b>	\$0	<b>Completion</b>	\$0	<b>Daily Total</b>	\$0		
<b>Cum Costs: Drilling</b>	\$0	<b>Completion</b>	\$0	<b>Well Total</b>	\$0		
<b>MD</b>	0	<b>TVD</b>	0	<b>Progress</b>	0	<b>Days</b>	0
		<b>MW</b>	0.0	<b>Visc</b>	0.0		
<b>Formation :</b>	<b>PBTD : 0.0</b>		<b>Perf :</b>	<b>PKR Depth : 0.0</b>			

**Activity at Report Time: LOCATION DATA**

Start	End	Hrs	Activity Description
06:00	06:00	24.0	LOCATION DATA
			1936' FNL & 1754' FEL (SW/NE)
			SECTION 22, T9S, R22E
			UINTAH COUNTY, UTAH
			TRUE RIG #15
			OBJECTIVE: 9475' MESAVERDE
			CHAPITA WELLS DEEP PROSPECT
			CHAPITA WELLS UNIT
			DW/GAS
			LEASE: U-0284-A
			ELEVATION: 4932' NAT GL, 4930' PREP GL, 4945 KB (15')
			EOG WI 27.50%, NRI 28.65%
			WESTPORT WI 50%
			ST MARY WI 22.5%

02-08-2005      Reported By      ED TROTTER

<b>Daily Costs: Drilling</b>			<b>Completion</b>				<b>Daily Total</b>				
<b>Cum Costs: Drilling</b>			<b>Completion</b>				<b>Well Total</b>				
<b>MD</b>	2,470	<b>TVD</b>	2,470	<b>Progress</b>	0	<b>Days</b>	0	<b>MW</b>	0.0	<b>Visc</b>	0.0
<b>Formation :</b>			<b>PBTD : 0.0</b>		<b>Perf :</b>		<b>PKR Depth : 0.0</b>				

Activity at Report Time: WORT

Start	End	Hrs	Activity Description
06:00	06:00	24.0	MIRU BILL JR'S BUCKET RIG. SPUDED 20" HOLE @ 10:00 AM, 12/29/04.

DRILLED 20" HOLE TO 45'. RAN 45' OF 13 3/8", 54#, H-40 CONDUCTOR PIPE AND CEMENTED TO SURFACE. DRILLED AND LINED RAT AND MOUSE HOLES. RD BUCKET RIG.

MIRU BILL JR'S AIR RIG. DRILLED 12 1/4" HOLE TO 2470'. RU WIRELINE UNIT AND RAN DIRECTIONAL SURVEY, SURVEY 1.5 DEGREE @ 2460'. RAN 59 JTS (2417.20') OF 9-5/8", 36.0#/FT, J-55, ST&C CASING. LANDED @ 2431.70' KB. RU BIG 4 CEMENTERS. PRESSURE TESTED LINES AND CEMENT VALVE TO 1500 PSIG. PUMP 170 BBLs WATER AHEAD. MIXED & PUMPED 20 BBLs GELLED WATER AHEAD OF CEMENT.

LEAD CEMENT: MIXED & PUMPED 220 SX PREMIUM CEMENT W/16% GEL & 10#/SX GILSONITE-3% SALT, 2% CACL2 & 1/4 #/SX FLOCELE. MIXED CEMENT @ 11.0 PPG W/YIELD OF 3.82 CF/SX (149.70 BBLs).

TAIL CEMENT: MIXED & PUMPED 200 SX PREMIUM CEMENT W/2% CACL2 & 1/4 #/SX FLOCELE. MIXED CEMENT @ 15.6 PPG W/YIELD OF 1.18 CF/SX (40.9 BBLs). DISPLACED CEMENT W/184.2 BBLs WATER, BUMPED PLUG W/1100#, CHECKED FLOAT, FLOAT HELD, SHUT-IN CASING VALVE. HAD CEMENT RETURNS TO SURFACE BUT FELL BACK. RAN 1" PIPE DOWN ANNULUS.

TOP OUT #1: MIXED & PUMPED 100 SX PREMIUM CEMENT W/2% CACL2 & 1/4 #/SX FLOCELE. MIXED CEMENT @ 16.0 PPG W/YIELD OF 1.18 CF/SX (21.00 BBLs). HAD CEMENT RETURNS TO SURFACE, CEMENT FELL BACK.

TOP OUT #2: MIXED & PUMPED 150 SX PREMIUM CEMENT W/2% CACL2 & 1/4 #/SX FLOCELE. MIXED CEMENT @ 16.0 PPG W/YIELD OF 1.18 CF/SX (30.7 BBLs). HAD CEMENT RETURNS TO SURFACE, CEMENT STAYED AT SURFACE.

TOP OUT #3: MIXED & PUMPED 100 SX PREMIUM CEMENT W/2% CACL2 & 1/4 #/SX FLOCELE. MIXED CEMENT @ 16.0 PPG W/YIELD OF 1.18 CF/SX (21.00 BBLs). HAD CEMENT RETURNS TO SURFACE, CEMENT FELL BACK.

TOP OUT #4: MIXED & PUMPED 150 SX PREMIUM CEMENT W/2% CACL2 & 1/4 #/SX FLOCELE. MIXED CEMENT @ 16.0 PPG W/YIELD OF 1.18 CF/SX (30.7 BBLs). HAD 5 BBLs CEMENT RETURNS TO SURFACE, CEMENT STAYED AT SURFACE.

TOP OUT #5: MIXED & PUMPED 100 SX PREMIUM CEMENT W/2% CACL2 & 1/4 #/SX FLOCELE. MIXED CEMENT @ 16.0 PPG W/YIELD OF 1.18 CF/SX (20.5 BBLs). HAD 6 BBLs CEMENT RETURNS TO SURFACE, CEMENT STAYED AT SURFACE.

RD BIG 4 CEMENTERS. PREPARED LOCATION FOR ROTARY RIG. WORT. WILL DROP FROM REPORT UNTIL FURTHER ACTIVITY.

DALL COOK NOTIFIED ED FORSMAN W/BLM & CAROL DANIELS W/UOGM AT 8:30 AM, 12/29/04 OF SPUDDING WELL.

8 CENTRALIZERS: ON 1ST, 2ND & 3RD COLLARS AND EVERY 5TH COLLAR.

02-19-2005 Reported By PAT CLARK

<b>Daily Costs: Drilling</b>				<b>Completion</b>				<b>Daily Total</b>			
<b>Cum Costs: Drilling</b>				<b>Completion</b>				<b>Well Total</b>			
<b>MD</b>	2,470	<b>TVD</b>	2,470	<b>Progress</b>	0	<b>Days</b>	0	<b>MW</b>	0.0	<b>Visc</b>	0.0
<b>Formation :</b>		<b>PBTD : 0.0</b>		<b>Perf :</b>				<b>PKR Depth : 0.0</b>			

Activity at Report Time: TEST BOPS

Start	End	Hrs	Activity Description
06:00	24:00	18.0	MIRU.
24:00	01:00	1.0	NU BOP. RIG ON DAYWORK @ 24:00 HRS, 2/18/05.
01:00	06:00	5.0	TESTED BOPS HIGH 5000 PSIG, LOW 250 PSIG. KELLY VALVES, PIPE & BLIND RAMS, KILL LINE, CHOKE LINE, MANIFOLD HIGH 2500 PSIG, LOW 250 PSIG ANNULAR. TESTED CASING TO 1500 PSI FOR 30 MINUTES.

SAFETY MEETING: RIGGING UP/100% TIE OFF OVER 6'

02-20-2005 Reported By PAT CLARK

<b>Daily Costs: Drilling</b>				<b>Completion</b>				<b>Daily Total</b>			
<b>Cum Costs: Drilling</b>				<b>Completion</b>				<b>Well Total</b>			
<b>MD</b>	3,208	<b>TVD</b>	3,208	<b>Progress</b>	738	<b>Days</b>	1	<b>MW</b>	8.4	<b>Visc</b>	26.0
<b>Formation :</b>		<b>PBTD : 0.0</b>		<b>Perf :</b>				<b>PKR Depth : 0.0</b>			

Activity at Report Time: DRILLING

Start	End	Hrs	Activity Description
06:00	14:00	8.0	INSTALLED WEAR BUSHING. PU BHA & DRILL PIPE. TAGGED CEMENT @ 2318'.
14:00	15:00	1.0	DISPLACED HOLE, FIXED LEAKS.
15:00	18:30	3.5	DRILL CEMENT/FLOAT EQUIPMENT & 10' NEW HOLE TO 2480'.
18:30	19:00	0.5	CIRCULATED BOTTOMS UP, SPOT GEL PILL ON BOTTOM. PERFORM LOT. LEAKED OFF AT 400 PSIG, 11.4 EMW.
19:00	20:00	1.0	DRILL & ROTATE 2480' - 2553', WOB 15K, RPM 50, ROP 73 FPH.
20:00	20:15	0.25	SURVEY, 1/2 DEG.
20:15	02:45	6.5	DRILL & ROTATE 2553' - 3054', WOB 22K, RPM 50, ROP 77 FPH.
02:45	03:15	0.5	SURVEY, 2 DEG. INSTALLED ROTATING HEAD & DRIVE BUSHINGS.
03:15	06:00	2.75	DRILL & ROTATE 3054' - 3208', WOB 20-25K, RPM 50, ROP 55 FPH.

SAFETY MEETING: PROPER LIFTING/PICKING UP PIPE  
BOP DRILL 90 SECONDS

06:00 18.0 SPUD 7 7/8" SURFACE HOLE AT 18:00 HRS, 2/19/05.

02-21-2005 Reported By PAT CLARK

<b>Daily Costs: Drilling</b>				<b>Completion</b>				<b>Daily Total</b>			
<b>Cum Costs: Drilling</b>				<b>Completion</b>				<b>Well Total</b>			
<b>MD</b>	4,480	<b>TVD</b>	4,480	<b>Progress</b>	1,272	<b>Days</b>	2	<b>MW</b>	8.5	<b>Visc</b>	28.0
<b>Formation :</b>		<b>PBTD : 0.0</b>		<b>Perf :</b>				<b>PKR Depth : 0.0</b>			

Activity at Report Time: DRILLING

Start	End	Hrs	Activity Description
06:00	09:15	3.25	DRILL ROTATE 3208' - 3334', WOB 22K, RPM 45-50, ROP 39 FPH.

09:15 09:45 0.5 SERVICED RIG.  
 09:45 13:45 4.0 DRILL & ROTATE 3334' - 3553', WOB 20-25K, RPM 55, ROP 55 FPH.  
 13:45 14:15 0.5 SURVEY, 1 3/4 DEG.  
 14:15 23:30 9.25 DRILL & ROTATE 3553' - 4086', WOB 22K, RPM 45-55, ROP 58 FPH.  
 23:30 24:00 0.5 SURVEY, 2 DEG.  
 24:00 06:00 6.0 DRILL & ROTATE 4086' - 4480', WOB 22K, RPM 50, ROP 66 FPH.

SAFETY MEETING: AIR TUGGER.  
 BOP DRILL EVENING TOUR 115 SECONDS

BG GAS 1200-6100U  
 CONN GAS 0-4000U, OVER BG GAS  
 SH 80%, SS 15%, LS 5%

02-22-2005 Reported By PAT CLARK

<b>Daily Costs: Drilling</b>			<b>Completion</b>			<b>Daily Total</b>					
<b>Cum Costs: Drilling</b>			<b>Completion</b>			<b>Well Total</b>					
MD	5,092	TVD	5,092	Progress	612	Days	3	MW	9.3	Visc	33.0
<b>Formation :</b>			<b>PBTD : 0.0</b>			<b>Perf :</b>			<b>PKR Depth : 0.0</b>		

Activity at Report Time: DRILLING

Start	End	Hrs	Activity Description
06:00	07:30	1.5	DRILL & ROTATE 4480' - 4560', WOB 22K, RPM 50-55, ROP 54 FPH.
07:30	08:15	0.75	SURVEY, 2 3/4 DEG. SERVICED RIG.
08:15	12:30	4.25	DRILL & ROTATE 4560' - 4714', WOB 22K, RPM 50, ROP 36 FPH.
12:30	21:30	9.0	CIRCULATED & WEIGHT UP MUD, WORKED TIGHT HOLE.
21:30	06:00	8.5	DRILL & ROTATE 4714' - 5092', WOB 22K, RPM 50, ROP 45 FPH.

SAFETY MEETING: MOVING MUD PRODUCTS

BG GAS 250-4500U, CONN GAS 1000-2500U OVER BG GAS, DOWN TIME GAS-7929U @ 4559'  
 SH 75%, SS 20%, LS 5%  
 WASATCH @ 4768'

02-23-2005 Reported By PAT CLARK

<b>Daily Costs: Drilling</b>			<b>Completion</b>			<b>Daily Total</b>					
<b>Cum Costs: Drilling</b>			<b>Completion</b>			<b>Well Total</b>					
MD	5,895	TVD	5,895	Progress	803	Days	4	MW	9.5	Visc	33.0
<b>Formation :</b>			<b>PBTD : 0.0</b>			<b>Perf :</b>			<b>PKR Depth : 0.0</b>		

Activity at Report Time: DRILLING

Start	End	Hrs	Activity Description
06:00	06:30	0.5	SURVEY, MISRUN.
06:30	07:00	0.5	DRILL & ROTATE 5092' - 5123', WOB 22K, RPM 50, ROP 62 FPH.
07:00	07:30	0.5	SURVEY, 2 3/4 DEG.
07:30	21:00	13.5	DRILL & ROTATE 5123' - 5624', WOB 17-25K, RPM 45-50, ROP 37 FPH.
21:00	22:00	1.0	SERVICED RIG. SURVEY, 2 3/4 DEG.

22:00 06:00 8.0 DRILL & ROTATE 5624' - 5895', WOB 20-25K, RPM 50-55, ROP 34 FPH.

SAFETY MEETING: RUNNING SURVEYS/WORKING SHORT HANDED  
FUNCTION TESTED PIPE RAMS, CHECKED CROWN-O-MATIC

BG GAS 130-350U, CONN GAS 200-3000 OVER BG GAS  
SH-55%, SS-45%  
CHAPITA WELLS @ 5307'

02-24-2005 Reported By TOM STONE

<b>Daily Costs: Drilling</b>				<b>Completion</b>				<b>Daily Total</b>			
<b>Cum Costs: Drilling</b>				<b>Completion</b>				<b>Well Total</b>			
<b>MD</b>	6,530	<b>TVD</b>	6,530	<b>Progress</b>	635	<b>Days</b>	5	<b>MW</b>	9.9	<b>Visc</b>	34.0
<b>Formation :</b>			<b>PBTD : 0.0</b>			<b>Perf :</b>			<b>PKR Depth : 0.0</b>		

Activity at Report Time: DRILLING

Start	End	Hrs	Activity Description
06:00	13:30	7.5	DRILL & ROTATE 5895' - 6121', ROP 30.1 FPH, WOB 20/22, RPM 45/55.
13:30	14:00	0.5	SURVEY AT 6075', 2 3/4 DEG.
14:00	14:30	0.5	SERVICED RIG.
14:30	06:00	15.5	DRILLED 6121' - 6530', ROP 26.4 FPH, WOB 20/24, RPM 45/50.

SAFETY MEETING: ADDING METHANOL TO AIR TANKS/LIGHT PLANT/HOUSEKEEPING  
FUNCTION TESTED PIPE RAMS & CHECKED CROWN-O-MATIC

02-25-2005 Reported By TOM STONE

<b>Daily Costs: Drilling</b>				<b>Completion</b>				<b>Daily Total</b>			
<b>Cum Costs: Drilling</b>				<b>Completion</b>				<b>Well Total</b>			
<b>MD</b>	6,810	<b>TVD</b>	6,810	<b>Progress</b>	280	<b>Days</b>	6	<b>MW</b>	10.0	<b>Visc</b>	35.0
<b>Formation :</b>			<b>PBTD : 0.0</b>			<b>Perf :</b>			<b>PKR Depth : 0.0</b>		

Activity at Report Time: DRILLING.

Start	End	Hrs	Activity Description
06:00	07:30	1.5	DRILLED 6530' - 6551'. ROP 14 FPH. WOB 20/24, RPM 45/55.
07:30	08:00	0.5	PUMP SLUG AND DROP SURVEY.
08:00	12:30	4.5	TRIP OOH. HAD TIGHT HOLE AT 4780' - 4670'. BIT #1 HAD ONE BROKEN CUTTER. ALL OTHER CUTTERS IN GOOD CONDITION. MADE UP BIT #2. SURVEY 2 1/4 DEG. FUNCTION BLIND RAMS.
12:30	16:30	4.0	TRIP IN HOLE. HIT TIGHT HOLE AT 4680'.
16:30	19:00	2.5	WASH/REAM 4680' - 4775'.
19:00	20:00	1.0	FINISH TRIP IN HOLE. WASHED 30' TO 6551'.
20:00	06:00	10.0	DRILLED 6551' - 6810'. ROP 25.9 FPH, WOB 20/28, RPM 40/55.

SAFETY MTG: FORKLIFT OPERATIONS, TRIP HAZARDS, TRIPPING PIPE.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires: March 31, 2007

019

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

**SUBMIT IN TRIPLICATE- Other instructions on reverse side.**

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. U-0284-A
2. Name of Operator EOG RESOURCES, INC.		6. If Indian, Allottee or Tribe Name
3a. Address P.O. BOX 250 Big Piney WY, 83113	3b. Phone No. (include area code) 307-276-3331	7. If Unit or CA/Agreement, Name and/or No. CHAPITA WELLS UNIT
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) SECTION 22, T9S, R22E SW/NE 1936 FNL 1754 FEL 40.023442 LAT 109.422231 LON		8. Well Name and No. CHAPITA WELLS 882-22
		9. API Well No. 43-047-35397
		10. Field and Pool, or Exploratory Area NATURAL BUTTES
		11. County or Parish, State UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <b>DRILLING</b>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<b>OPERATIONS</b>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Please see the attached well chronology report for drilling operations from 2/25/2005 - 3/4/2005.

RECEIVED  
MAR 0 / 2005  
DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) Kaylene R. Gardner	Title Regulatory Assistant
Signature 	Date 03/05/2005

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by ----- Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Title ----- Office	Date -----
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------	---------------

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)



**WELL CHRONOLOGY  
REPORT**

Report Generated On: 03-04-2005

Well Name	CWU 882-22	Well Type	DEVG	Division	DENVER
Field	CHAPITA WELLS DEEP	API #	43-047-35397	Well Class	DRIL
County, State	UINTAH, UT	Spud Date	02-19-2005	Class Date	
Tax Credit	N	TVD / MD	9,475/ 9,475	Property #	053629
Water Depth	0	Last CSG	4.5	Shoe TVD / MD	0/ 0
KB / GL Elev	4,945/ 4,930				
Location	Section 22, T9S, R22E, SWNE, 1936 FNL & 1754 FEL				

Event No	1.0	Description	DRILL & COMPLETE		
Operator	EOG RESOURCES, INC	WI %	27.5	NRI %	28.65

AFE No	302540	AFE Total		DHC / CWC							
Rig Contr	TRUE	Rig Name	TRUE #15	Start Date	02-13-2005	Release Date					
Rig Contr	TRUE	Rig Name	TRUE #15	Start Date	12-15-2003	Release Date					
12-15-2003	Reported By										
Daily Costs: Drilling	\$0	Completion	\$0	Daily Total	\$0						
Cum Costs: Drilling	\$0	Completion	\$0	Well Total	\$0						
MD	0	TVD	0	Progress	0	Days	0	MW	0.0	Visc	0.0
Formation :	PBTB : 0.0		Perf :		PKR Depth : 0.0						

Activity at Report Time: LOCATION DATA

Start	End	Hrs	Activity Description
06:00	06:00	24.0	LOCATION DATA
			1936' FNL & 1754' FEL (SW/NE)
			SECTION 22, T9S, R22E
			UINTAH COUNTY, UTAH
			TRUE RIG #15
			OBJECTIVE: 9475' MESAVERDE
			CHAPITA WELLS DEEP PROSPECT
			CHAPITA WELLS UNIT
			DW/GAS
			LEASE: U-0284-A
			ELEVATION: 4932' NAT GL, 4930' PREP GL, 4945 KB (15')
			EOG WI 27.50%, NRI 28.65%
			WESTPORT WI 50%
			ST MARY WI 22.5%

02-08-2005      Reported By      ED TROTTER

22:00 06:00 8.0 DRILL & ROTATE 5624' - 5895', WOB 20-25K, RPM 50-55, ROP 34 FPH.

SAFETY MEETING: RUNNING SURVEYS/WORKING SHORT HANDED  
FUNCTION TESTED PIPE RAMS, CHECKED CROWN-O-MATIC

BG GAS 130-350U, CONN GAS 200-3000 OVER BG GAS  
SH-55%, SS-45%  
CHAPITA WELLS @ 5307'

02-24-2005 Reported By TOM STONE

<b>Daily Costs: Drilling</b>					<b>Completion</b>			<b>Daily Total</b>			
<b>Cum Costs: Drilling</b>					<b>Completion</b>			<b>Well Total</b>			
<b>MD</b>	6,530	<b>TVD</b>	6,530	<b>Progress</b>	635	<b>Days</b>	5	<b>MW</b>	9.9	<b>Visc</b>	34.0
<b>Formation :</b>	<b>PBTD : 0.0</b>				<b>Perf :</b>			<b>PKR Depth : 0.0</b>			

Activity at Report Time: DRILLING

Start	End	Hrs	Activity Description
06:00	13:30	7.5	DRILL & ROTATE 5895' - 6121', ROP 30.1 FPH, WOB 20/22, RPM 45/55.
13:30	14:00	0.5	SURVEY AT 6075', 2 3/4 DEG.
14:00	14:30	0.5	SERVICED RIG.
14:30	06:00	15.5	DRILLED 6121' - 6530', ROP 26.4 FPH, WOB 20/24, RPM 45/50.

SAFETY MEETING: ADDING METHANOL TO AIR TANKS/LIGHT PLANT/HOUSEKEEPING  
FUNCTION TESTED PIPE RAMS & CHECKED CROWN-O-MATIC

02-25-2005 Reported By TOM STONE

<b>Daily Costs: Drilling</b>					<b>Completion</b>			<b>Daily Total</b>			
<b>Cum Costs: Drilling</b>					<b>Completion</b>			<b>Well Total</b>			
<b>MD</b>	6,810	<b>TVD</b>	6,810	<b>Progress</b>	280	<b>Days</b>	6	<b>MW</b>	10.0	<b>Visc</b>	35.0
<b>Formation :</b>	<b>PBTD : 0.0</b>				<b>Perf :</b>			<b>PKR Depth : 0.0</b>			

Activity at Report Time: DRILLING

Start	End	Hrs	Activity Description
06:00	07:30	1.5	DRILLED 6530' - 6551', ROP 14 FPH, WOB 20/24, RPM 45/55.
07:30	08:00	0.5	PUMPED SLUGGED & DROPPED SURVEY.
08:00	12:30	4.5	TOH, HAD TIGHT HOLE AT 4780' - 4670'. BIT #1 HAD ONE BROKEN CUTTER, ALL OTHER CUTTERS IN GOOD CONDITION. MADE UP BIT #2. SURVEY 2 1/4 DEG. FUNCTION TESTED BLIND RAMS.
12:30	16:30	4.0	TIH. HIT TIGHT HOLE AT 4680'.
16:30	19:00	2.5	WASH/REAM 4680' - 4775'.
19:00	20:00	1.0	FINISH TRIP IN HOLE. WASHED 30' TO 6551'.
20:00	06:00	10.0	DRILLED 6551' - 6810', ROP 25.9 FPH, WOB 20/28, RPM 40/55.

SAFETY MEETING: FORKLIFT OPERATIONS/TRIP HAZARDS/TRIPPING PIPE

02-26-2005 Reported By TOM STONE

<b>Daily Costs: Drilling</b>					<b>Completion</b>			<b>Daily Total</b>			
<b>Cum Costs: Drilling</b>					<b>Completion</b>			<b>Well Total</b>			
<b>MD</b>	7,395	<b>TVD</b>	7,395	<b>Progress</b>	585	<b>Days</b>	7	<b>MW</b>	9.8	<b>Visc</b>	36.0

Formation : PBTB : 0.0 Perf : PKR Depth : 0.0

Activity at Report Time: DRILLING

Start	End	Hrs	Activity Description
06:00	08:30	2.5	DRILLED 6810' - 6872', ROP 24.8 FPH, WOB 26/28, RPM 40/45.
08:30	09:00	0.5	SERVICED RIG. FUNCTION TESTED PIPE RAMS. CHECKED CROWN-O-MATIC.
09:00	06:00	21.0	DRILLED 6872' - 7395', ROP 24.9 FPH, WOB 26/28, RPM 45. LOST 100 BBL MUD AT 7180' WHILE WEIGHTING UP MUD TO 10.3 PPG, ADDED LCM.

SAFETY MEETING: MSDS FOR DIESEL FUEL/MIXING BARITE

02-27-2005 Reported By TOM STONE

Daily Costs: Drilling			Completion			Daily Total					
Cum Costs: Drilling			Completion			Well Total					
MD	8,010	TVD	8,010	Progress	615	Days	8	MW	10.5	Visc	40.0

Formation : PBTB : 0.0 Perf : PKR Depth : 0.0

Activity at Report Time: DRILLING

Start	End	Hrs	Activity Description
06:00	08:00	2.0	DRILLED 7395' - 7465', ROP 35 FPH, WOB 25/28, RPM 40/45.
08:00	08:30	0.5	SERVICED RIG. FUNCTION TESTED PIPE RAMS. CHECKED CROWN-O-MATIC.
08:30	06:00	21.5	DRILLED 7465' - 8010', ROP 25.3 FPH, WOB 26/28, RPM 40/45.

SAFETY MEETING: RIG CLEANING/HANGING TONGS/DRIVING

02-28-2005 Reported By TOM STONE

Daily Costs: Drilling			Completion			Daily Total					
Cum Costs: Drilling			Completion			Well Total					
MD	8,552	TVD	8,552	Progress	542	Days	9	MW	10.4	Visc	39.0

Formation : PBTB : 0.0 Perf : PKR Depth : 0.0

Activity at Report Time: DRILLING

Start	End	Hrs	Activity Description
06:00	09:30	3.5	DRILLED 8010' - 8088', ROP 22.3 FPH, WOB 26/28, RPM 40/45.
09:30	10:30	1.0	SERVICED RIG. FUNCTION TESTED PIPE RAMS. CHECKED CROWN-O-MATIC.
10:30	06:00	19.5	DRILLED 8088' - 8552', ROP 23.8 FPH, WOB 26/28, RPM 40/60. CONDITIONED MUD TO 10.8 PPG FOR BIT TRIP.

SAFETY MEETING: MIXING CHEMICALS/WELL CONTROL/BAR HOPPER

03-01-2005 Reported By TOM STONE

Daily Costs: Drilling			Completion			Daily Total					
Cum Costs: Drilling			Completion			Well Total					
MD	8,690	TVD	8,690	Progress	138	Days	10	MW	10.8	Visc	36.0

Formation : PBTB : 0.0 Perf : PKR Depth : 0.0

Activity at Report Time: DRILLING

Start	End	Hrs	Activity Description
06:00	07:30	1.5	CONDITION MUD TO 10.8 PPG. DROPPED SURVEY & PUMPED SLUG.
07:30	14:00	6.5	TOH FOR BIT. BIT #2 HAD 1BROKEN CUTTER. SURVEY, MISS-RUN.

14:00	21:00	7.0 MADE UP BIT #3. TIH TO TIGHT HOLE AT 5508'. KELLIED UP, UNABLE TO ROTATE. LAYED DOWN 1 JT.
21:00	00:30	3.5 WASH/REAM TIGHT HOLE 6185' - 6279'. TIH TO TIGHT HOLE AT 7027'. WASHED TIGHT HOLE FROM 7027' - 7090'.
00:30	01:30	1.0 FINISHED TIH, NO FILL.
01:30	06:00	4.5 DRILLED 8552' - 8690', ROP 30.7 FPH, WOB 23/25, RPM 50/55.

## SAFETY MEETING: DESIGNATED SMOKING AREA/TRIP PIPE

<b>03-02-2005</b>	<b>Reported By</b>		<b>TOM STONE</b>								
<b>Daily Costs: Drilling</b>					<b>Completion</b>					<b>Daily Total</b>	
<b>Cum Costs: Drilling</b>					<b>Completion</b>					<b>Well Total</b>	
<b>MD</b>	9,190	<b>TVD</b>	9,190	<b>Progress</b>	500	<b>Days</b>	11	<b>MW</b>	10.7	<b>Visc</b>	37.0
<b>Formation :</b>	<b>PBTD : 0.0</b>				<b>Perf :</b>	<b>PKR Depth : 0.0</b>					
<b>Activity at Report Time: DRILLING</b>											
<b>Start</b>	<b>End</b>	<b>Hrs</b>	<b>Activity Description</b>								
06:00	06:00	24.0	DRILLED 8690' - 9190', ROP 20.8 FPH, WOB 23/25, RPM 45/55. FUNCTION TESTED PIPE RAMS. HELD BOP DRILL.								

## SAFETY MEETING: TRIPPING PIPE/LOOSE CLOTHING &amp; MACHINERY/SAFETY GLASSES

<b>03-03-2005</b>	<b>Reported By</b>		<b>TOM STONE</b>								
<b>Daily Costs: Drilling</b>					<b>Completion</b>					<b>Daily Total</b>	
<b>Cum Costs: Drilling</b>					<b>Completion</b>					<b>Well Total</b>	
<b>MD</b>	9,420	<b>TVD</b>	9,420	<b>Progress</b>	230	<b>Days</b>	12	<b>MW</b>	11.0	<b>Visc</b>	39.0
<b>Formation :</b>	<b>PBTD : 0.0</b>				<b>Perf :</b>	<b>PKR Depth : 0.0</b>					
<b>Activity at Report Time: CIRCULATE/CONDITION MUD</b>											
<b>Start</b>	<b>End</b>	<b>Hrs</b>	<b>Activity Description</b>								
06:00	14:30	8.5	DRILLED 9190' - 9396', ROP 24.2 FPH, WOB 20/25, RPM 50/55.								
14:30	15:00	0.5	SERVICED RIG. FUNCTION TESTED PIPE RAMS. CHECKED CROWN-O-MATIC.								
15:00	21:00	6.0	DRILLED 9396' - 9420', ROP 4 FPH, WOB 20/30, RPM 40/55.								
21:00	00:30	3.5	CONDITION MUD TO 11.3 PPG. BGG DECREASED FROM 3000/3900U TO 1600U BEHIND GAS BUSTER. PUMPED SLUG.								
00:30	02:30	2.0	MADE 20 STD WIPER TRIP. 5900U SHORT TRIP GAS W/20' FLARE.								
02:30	06:00	3.5	CONDITIONED MUD TO 11.5 PPG. STARTED LOSING PARTIAL RETURNS, 125 BBL AT REPORT TIME. ADDING LCM TO SYSTEM & BUILDING MUD VOLUME. CIRC AT SLOW PUMP RATE W/EST 70% RETURNS. 11.5 PPG IN, 11.3+ PPG OUT, BGG 600U.								

<b>03-04-2005</b>	<b>Reported By</b>		<b>TOM STONE</b>								
<b>Daily Costs: Drilling</b>					<b>Completion</b>					<b>Daily Total</b>	
<b>Cum Costs: Drilling</b>					<b>Completion</b>					<b>Well Total</b>	
<b>MD</b>	9,420	<b>TVD</b>	9,420	<b>Progress</b>	0	<b>Days</b>	13	<b>MW</b>	11.3	<b>Visc</b>	40.0
<b>Formation :</b>	<b>PBTD : 0.0</b>				<b>Perf :</b>	<b>PKR Depth : 0.0</b>					
<b>Activity at Report Time: RUNNING PRODUCTION CASING.</b>											
<b>Start</b>	<b>End</b>	<b>Hrs</b>	<b>Activity Description</b>								
06:00	07:00	1.0	CIRCULATE AND ADD LCM TO MUD. PUMP PILL AND START OOH.								
07:00	22:30	15.5	POOH LAYING DOWN DRILL STRING. BROKE AND SET BACK KELLY. PULL WEAR BUSHING.								

22:30 06:00 7.5 R/U FRANKS WESTATES CASING TOOLS. HELD SAFETY MTG. RAN 4 1/2", 11.6 #/FT, N-80, LTC CASING.  
HAVE 7050 IN HOLE AT REPORT TIME.

SAFETY MTG: LAY DOWN DRILL PIPE AND DRILL COLLARS.

MUD LOG TOPS: WASATCH - 4768' ISLAND - 7178'  
CHAPITA WELLS - 5328' KMV PRICE RIVER - 7442'  
BUCK CANYON - 5984' PRICE RIVER MID - 8095'  
NORTH HORN - 6648' PRICE RIVER LOW - 8902'  
SEGO - 9345'

---

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

020

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

<b>SUBMIT IN TRIPLICATE- Other instructions on reverse side.</b>		5. Lease Serial No. <b>U-0284-A</b>
1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		6. If Indian, Allottee or Tribe Name
2. Name of Operator <b>EOG RESOURCES, INC.</b>		7. If Unit or CA/Agreement, Name and/or No. <b>CHAPITA WELLS UNIT</b>
3a. Address <b>P.O. BOX 250 Big Piney WY, 83113</b>	3b. Phone No. (include area code) <b>307-276-3331</b>	8. Well Name and No. <b>CHAPITA WELLS 882-22</b>
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) <b>SECTION 22, T9S, R22E SW/NE 1936 FNL 1754 FEL 40.023442 LAT 109.422231 LON</b>		9. API Well No. <b>43-047-35397</b>
		10. Field and Pool, or Exploratory Area <b>NATURAL BUTTES</b>
		11. County or Parish, State <b>UINTAH COUNTY, UT</b>

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <b>DRILLING</b>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<b>OPERATIONS</b>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Please see the attached well chronology report for drilling operations from 3/4/2005 - 3/18/2005.

**RECEIVED**  
**MAR 21 2005**

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct Name (Printed/Typed) <b>Kaylene R. Gardner</b>		Title <b>Regulatory Assistant</b>
Signature 		Date <b>03/18/2005</b>

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office _____	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)



14:00	21:00	7.0	MADE UP BIT #3. TIH TO TIGHT HOLE AT 5508'. KELLIED UP, UNABLE TO ROTATE. LAYED DOWN 1 JT.
21:00	00:30	3.5	WASH/REAM TIGHT HOLE 6185' - 6279'. TIH TO TIGHT HOLE AT 7027'. WASHED TIGHT HOLE FROM 7027' - 7090'.
00:30	01:30	1.0	FINISHED TIH, NO FILL.
01:30	06:00	4.5	DRILLED 8552' - 8690', ROP 30.7 FPH, WOB 23/25, RPM 50/55.

## SAFETY MEETING: DESIGNATED SMOKING AREA/TRIP PIPE

<b>03-02-2005</b>	<b>Reported By</b>	<b>TOM STONE</b>									
<b>DailyCosts: Drilling</b>				<b>Completion</b>				<b>Daily Total</b>			
<b>Cum Costs: Drilling</b>				<b>Completion</b>				<b>Well Total</b>			
<b>MD</b>	9,190	<b>TVD</b>	9,190	<b>Progress</b>	500	<b>Days</b>	11	<b>MW</b>	10.7	<b>Visc</b>	37.0
<b>Formation :</b>			<b>PBTD : 0.0</b>			<b>Perf :</b>			<b>PKR Depth : 0.0</b>		
<b>Activity at Report Time: DRILLING</b>											
<b>Start</b>	<b>End</b>	<b>Hrs</b>	<b>Activity Description</b>								
06:00	06:00	24.0	DRILLED 8690' - 9190', ROP 20.8 FPH, WOB 23/25, RPM 45/55. FUNCTION TESTED PIPE RAMS. HELD BOP DRILL.								

## SAFETY MEETING: TRIPPING PIPE/LOOSE CLOTHING &amp; MACHINERY/SAFETY GLASSES

<b>03-03-2005</b>	<b>Reported By</b>	<b>TOM STONE</b>									
<b>DailyCosts: Drilling</b>				<b>Completion</b>				<b>Daily Total</b>			
<b>Cum Costs: Drilling</b>				<b>Completion</b>				<b>Well Total</b>			
<b>MD</b>	9,420	<b>TVD</b>	9,420	<b>Progress</b>	230	<b>Days</b>	12	<b>MW</b>	11.0	<b>Visc</b>	39.0
<b>Formation :</b>			<b>PBTD : 0.0</b>			<b>Perf :</b>			<b>PKR Depth : 0.0</b>		
<b>Activity at Report Time: CIRCULATE/CONDITION MUD</b>											
<b>Start</b>	<b>End</b>	<b>Hrs</b>	<b>Activity Description</b>								
06:00	14:30	8.5	DRILLED 9190' - 9396', ROP 24.2 FPH, WOB 20/25, RPM 50/55.								
14:30	15:00	0.5	SERVICED RIG. FUNCTION TESTED PIPE RAMS. CHECKED CROWN-O-MATIC.								
15:00	21:00	6.0	DRILLED 9396' - 9420' TD, ROP 4 FPH, WOB 20/30, RPM 40/55. REACHED TD AT 21:00 HRS, 3/2/05.								
21:00	00:30	3.5	CONDITION MUD TO 11.3 PPG. BGG DECREASED FROM 3000/3900U TO 1600U BEHIND GAS BUSTER. PUMPED SLUG.								
00:30	02:30	2.0	MADE 20 STD WIPER TRIP. 5900U SHORT TRIP GAS W/20' FLARE.								
02:30	06:00	3.5	CONDITIONED MUD TO 11.5 PPG. STARTED LOSING PARTIAL RETURNS, 125 BBL AT REPORT TIME. ADDING LCM TO SYSTEM & BUILDING MUD VOLUME. CIRC AT SLOW PUMP RATE W/EST 70% RETURNS. 11.5 PPG IN, 11.3+ PPG OUT, BGG 600U.								

<b>03-04-2005</b>	<b>Reported By</b>	<b>TOM STONE</b>									
<b>DailyCosts: Drilling</b>				<b>Completion</b>				<b>Daily Total</b>			
<b>Cum Costs: Drilling</b>				<b>Completion</b>				<b>Well Total</b>			
<b>MD</b>	9,420	<b>TVD</b>	9,420	<b>Progress</b>	0	<b>Days</b>	13	<b>MW</b>	11.3	<b>Visc</b>	40.0
<b>Formation :</b>			<b>PBTD : 0.0</b>			<b>Perf :</b>			<b>PKR Depth : 0.0</b>		
<b>Activity at Report Time: RUN PROD CASING</b>											
<b>Start</b>	<b>End</b>	<b>Hrs</b>	<b>Activity Description</b>								
06:00	07:00	1.0	CIRCULATED & ADDED LCM TO MUD. PUMPED PILL & STARTED OOH.								
07:00	22:30	15.5	POH LAYING DOWN DRILL STRING. BROKE & SET BACK KELLY. PULLED WEAR BUSHING.								

22:30 06:00 7.5 RU FRANK WESTATES CASING TOOLS. HELD SAFETY MTG. RAN 4 1/2", 11.6 #/FT, N-80, LTC CASING. HAVE 7050' IN HOLE AT REPORT TIME.

SAFETY MEETING: LD DP & DC

MUD LOG TOPS:

- WASATCH 4768'
- CHAPITA WELLS 5328'
- BUCK CANYON 5984'
- NORTH HORN 6648'
  
- ISLAND 7178'
- KMV PRICE RIVER 7442'
- PRICE RIVER MID 8095'
- PRICE RIVER LOW 8902'
- SEGO 9345'

03-05-2005 Reported By TOM STONE

<b>Daily Costs: Drilling</b>				<b>Completion</b>				<b>Daily Total</b>			
<b>Cum Costs: Drilling</b>				<b>Completion</b>				<b>Well Total</b>			
<b>MD</b>	9,420	<b>TVD</b>	9,420	<b>Progress</b>	0	<b>Days</b>	14	<b>MW</b>	11.3	<b>Visc</b>	40.0
<b>Formation :</b>			<b>PBTD : 0.0</b>		<b>Perf :</b>		<b>PKR Depth : 0.0</b>				

Activity at Report Time: WO COMPLETION

Start	End	Hrs	Activity Description
06:00	08:00	2.0	RAN 215 4 1/2", 11.6 #, N-80, LTC CASING AS FOLLOWS: FLOAT SHOE, MARKER JOING AT 9399', FLOAT COLLAR, 46 JTS CASING, MARKER COLLAR AT 7381', 70 JTS, MARKER COLLAR AT 4322', 99 JTS CASING. TOTAL LENGTH 9426'. LANDED CASING AT 9420'.
08:00	10:00	2.0	CIRCULATED BOTTOMS UP. RD CASING TOOLS. HELD SAFETY MTG W/SCHLUMBERGER.
10:00	13:00	3.0	RU SCHLUMBERGER. TESTED SURFACE LINES TO 5000 PSI. CEMENTED AS FOLLOWS: PUMPED 20 BBL WATER SPACER, 20 BBL CHEM WASH, 495 SKS 35:65 POZG + ADDITIVES, 1.75 CFS, 8.8 GPS, 13.0 PPG. SLURRY VOL 154.3 BBL. TAIL IN W/1450 SKS 50:50 POZG + ADDITIVES, 1.29 CFS, 5.96 GPS, 14.1 PPG. SLURRY VOL 333.1 BBL. DISPLACED CEMENT W/TOTAL 146 BBL WATER + 2 GAL/1000 L064. BEGAN DISPLACEMENT W/EST 100% RETURNS. RETURNS STEADILY DECREASED TO 0 W/110 BBL DISPLACED. PUMPED LAST 36 BBL W/NO RETURNS. BUMPED PLUG W/3350 PSI. FLOATS HELD. CIP 1218 HRS. RD CEMENT TOOLS.
13:00	15:00	2.0	ND ROTATING HEAD & PU BOP. SET CONTINGENCY SLIPS W/64K ON SAME. CUT OFF LANDING JT. SET BOP & TESTED PACKOFF TO 500 PSI. NU ROTATING HEAD.
15:00	16:30	1.5	FINISHED CLEANING MUD TANKS.

RIG RELEASED TO CWU 895-26 16:30 HRS, 3/4/05  
 DIESEL FUEL 2569 GAL, PROPANE 7100 GAL  
 SAFETY MEETING: RUN CASING & CEMENT

16:30 7.5 RELEASED RIG AT 16:30 HRS, 3/4/05.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

021

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

**SUBMIT IN TRIPLICATE- Other instructions on reverse side.**

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. U-0284-A
2. Name of Operator EOG RESOURCES, INC.		6. If Indian, Allottee or Tribe Name
3a. Address P.O. BOX 250 Big Piney WY, 83113	3b. Phone No. (include area code) 307-276-3331	7. If Unit or CA/Agreement, Name and/or No. CHAPITA WELLS UNIT
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) SECTION 22, T9S, R22E SW/NE 1936 FNL 1754 FEL 40.023442 LAT 109.422231 LON		8. Well Name and No. CHAPITA WELLS 882-22
		9. API Well No. 43-047-35397
		10. Field and Pool, or Exploratory Area NATURAL BUTTES
		11. County or Parish, State UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other <b>DRILLING</b>
			<b>OPERATIONS</b>


13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Please see the attached well chronology report for completion operations from 3/18/2005 - 3/24/2005.

RECEIVED

MAR 28 2005

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct Name (Printed/Typed) Kaylene R. Gardner		Title Regulatory Assistant
Signature 		Date 03/18/2005

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

## WELL CHRONOLOGY REPORT

Report Generated On: 03-24-2005

<b>Well Name</b>	CWU 882-22	<b>Well Type</b>	DEVG	<b>Division</b>	DENVER
<b>Field</b>	CHAPITA WELLS DEEP	<b>API #</b>	43-047-35397	<b>Well Class</b>	COMP
<b>County, State</b>	UINTAH, UT	<b>Spud Date</b>	02-19-2005	<b>Class Date</b>	
<b>Tax Credit</b>	N	<b>TVD / MD</b>	9,475/ 9,475	<b>Property #</b>	053629
<b>Water Depth</b>	0	<b>Last CSG</b>	4.5	<b>Shoe TVD / MD</b>	9,420/ 9,420
<b>KB / GL Elev</b>	4,945/ 4,930				
<b>Location</b>	Section 22, T9S, R22E, SWNE, 1936 FNL & 1754 FEL				

<b>Event No</b>	1.0	<b>Description</b>	DRILL & COMPLETE		
<b>Operator</b>	EOG RESOURCES, INC	<b>WI %</b>	27.5	<b>NRI %</b>	28.65

<b>AFE No</b>	302540	<b>AFE Total</b>	DHC / CWC								
<b>Rig Contr</b>	TRUE	<b>Rig Name</b>	TRUE #15	<b>Start Date</b>	02-13-2005	<b>Release Date</b>	03-04-2005				
<b>Rig Contr</b>	TRUE	<b>Rig Name</b>	TRUE #15	<b>Start Date</b>	12-15-2003	<b>Release Date</b>	03-04-2005				
<b>12-15-2003      Reported By</b>											
<b>Daily Costs: Drilling</b>	\$0	<b>Completion</b>	\$0	<b>Daily Total</b>	\$0						
<b>Cum Costs: Drilling</b>	\$0	<b>Completion</b>	\$0	<b>Well Total</b>	\$0						
<b>MD</b>	0	<b>TVD</b>	0	<b>Progress</b>	0	<b>Days</b>	0	<b>MW</b>	0.0	<b>Visc</b>	0.0
<b>Formation :</b>	PBTB : 0.0			<b>Perf :</b>	PKR Depth : 0.0						

**Activity at Report Time: LOCATION DATA**

Start	End	Hrs	Activity Description
06:00	06:00	24.0	LOCATION DATA 1936' FNL & 1754' FEL (SW/NE) SECTION 22, T9S, R22E UINTAH COUNTY, UTAH
			TRUE RIG #15 OBJECTIVE: 9475' MESAVERDE CHAPITA WELLS DEEP PROSPECT CHAPITA WELLS UNIT DW/GAS
			LEASE: U-0284-A ELEVATION: 4932' NAT GL, 4930' PREP GL, 4945 KB (15')
			EOG WI 27.50%, NRI 28.65%
			WESTPORT WI 50%
			ST MARY WI 22.5%

---

02-08-2005      **Reported By**      ED TROTTER

22:30 06:00 7.5 RU FRANK WESTATES CASING TOOLS. HELD SAFETY MTG. RAN 4 1/2", 11.6 #/FT, N-80, LTC CASING. HAVE 7050' IN HOLE AT REPORT TIME.

SAFETY MEETING: LD DP & DC

MUD LOG TOPS:

- WASATCH 4768'
- CHAPITA WELLS 5328'
- BUCK CANYON 5984'
- NORTH HORN 6648'
  
- ISLAND 7178'
- KMV PRICE RIVER 7442'
- PRICE RIVER MID 8095'
- PRICE RIVER LOW 8902'
- SEGO 9345'

03-05-2005 Reported By TOM STONE

<b>Daily Costs: Drilling</b>			<b>Completion</b>			<b>Daily Total</b>					
<b>Cum Costs: Drilling</b>			<b>Completion</b>			<b>Well Total</b>					
<b>MD</b>	9,420	<b>TVD</b>	9,420	<b>Progress</b>	0	<b>Days</b>	14	<b>MW</b>	11.3	<b>Visc</b>	40.0
<b>Formation :</b>			<b>PBTD : 0.0</b>			<b>Perf :</b>			<b>PKR Depth : 0.0</b>		

Activity at Report Time: WO COMPLETION

Start	End	Hrs	Activity Description
06:00	08:00	2.0	RAN 215 4 1/2", 11.6 #, N-80, LTC CASING AS FOLLOWS: FLOAT SHOE, MARKER JOING AT 9399', FLOAT COLLAR, 46 JTS CASING, MARKER COLLAR AT 7381', 70 JTS, MARKER COLLAR AT 4322', 99 JTS CASING. TOTAL LENGTH 9426'. LANDED CASING AT 9420'.
08:00	10:00	2.0	CIRCULATED BOTTOMS UP. RD CASING TOOLS. HELD SAFETY MTG W/SCHLUMBERGER.
10:00	13:00	3.0	RU SCHLUMBERGER. TESTED SURFACE LINES TO 5000 PSI. CEMENTED AS FOLLOWS: PUMPED 20 BBL WATER SPACER, 20 BBL CHEM WASH, 495 SKS 35:65 POZG + ADDITIVES, 1.75 CFS, 8.8 GPS, 13.0 PPG. SLURRY VOL 154.3 BBL. TAIL IN W/1450 SKS 50:50 POZG + ADDITIVES, 1.29 CFS, 5.96 GPS, 14.1 PPG. SLURRY VOL 333.1 BBL. DISPLACED CEMENT W/TOTAL 146 BBL WATER + 2 GAL/1000 L064. BEGAN DISPLACEMENT W/EST 100% RETURNS. RETURNS STEADILY DECREASED TO 0 W/110 BBL DISPLACED. PUMPED LAST 36 BBL W/NO RETURNS. BUMPED PLUG W/3350 PSI. FLOATS HELD. CIP 1218 HRS. RD CEMENT TOOLS.
13:00	15:00	2.0	ND ROTATING HEAD & PU BOP. SET CONTINGENCY SLIPS W/64K ON SAME. CUT OFF LANDING JT. SET BOP & TESTED PACKOFF TO 500 PSI. NU ROTATING HEAD.
15:00	16:30	1.5	FINISHED CLEANING MUD TANKS.

RIG RELEASED TO CWU 895-26 16:30 HRS, 3/4/05  
 DIESEL FUEL 2569 GAL, PROPANE 7100 GAL  
 SAFETY MEETING: RUN CASING & CEMENT

16:30 7.5 RELEASED RIG AT 16:30 HRS, 3/4/05.

03-19-2005 Reported By SEARLE



UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires: March 31, 2007

022

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

<b>SUBMIT IN TRIPLICATE- Other instructions on reverse side.</b>		5. Lease Serial No. U-0284-A
1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		6. If Indian, Allottee or Tribe Name
2. Name of Operator EOG RESOURCES, INC.		7. If Unit or CA/Agreement, Name and/or No. CHAPITA WELLS UNIT
3a. Address P.O. BOX 250 Big Piney WY, 83113		8. Well Name and No. CHAPITA WELLS 882-22
3b. Phone No. (include area code) 307-276-3331		9. API Well No. 43-047-35397
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) SECTION 22, T9S, R22E SW/NE 1936 FNL 1754 FEL 40.023442 LAT 109.422231 LON		10. Field and Pool, or Exploratory Area NATURAL BUTTES
		11. County or Parish, State UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <b>DRILLING</b>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<b>OPERATIONS</b>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Please see the attached well chronology report for completion operations from 3/24/2005 - 4/1/2005.

EOG Resources, Inc. operates under Nationwide Bond #2308

RECEIVED

APR 05 2005

DIV. OF OIL, GAS & MINERAL

14. I hereby certify that the foregoing is true and correct	
Name (Printed/Typed) Kaylene R. Gardner	Title Regulatory Assistant
Signature 	Date 04/01/2005
<b>THIS SPACE FOR FEDERAL OR STATE OFFICE USE</b>	

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

## WELL CHRONOLOGY REPORT

Report Generated On: 04-01-2005

<b>Well Name</b>	CWU 882-22	<b>Well Type</b>	DEVG	<b>Division</b>	DENVER
<b>Field</b>	CHAPITA WELLS DEEP	<b>API #</b>	43-047-35397	<b>Well Class</b>	COMP
<b>County, State</b>	UINTAH, UT	<b>Spud Date</b>	02-19-2005	<b>Class Date</b>	
<b>Tax Credit</b>	N	<b>TVD / MD</b>	9,475/ 9,475	<b>Property #</b>	053629
<b>Water Depth</b>	0	<b>Last CSG</b>	2.375	<b>Shoe TVD / MD</b>	0/ 0
<b>KB / GL Elev</b>	4,945/ 4,930				
<b>Location</b>	Section 22, T9S, R22E, SWNE, 1936 FNL & 1754 FEL				

<b>Event No</b>	1.0	<b>Description</b>	DRILL & COMPLETE		
<b>Operator</b>	EOG RESOURCES, INC	<b>WI %</b>	27.5	<b>NRI %</b>	28.65

<b>AFE No</b>	302540	<b>AFE Total</b>					
<b>Rig Contr</b>	TRUE	<b>Rig Name</b>	TRUE #15	<b>Start Date</b>	02-13-2005	<b>Release Date</b>	03-04-2005
<b>Rig Contr</b>	TRUE	<b>Rig Name</b>	TRUE #15	<b>Start Date</b>	12-15-2003	<b>Release Date</b>	03-04-2005
12-15-2003 <b>Reported By</b>							
<b>Daily Costs: Drilling</b>	\$0	<b>Completion</b>	\$0	<b>Daily Total</b>	\$0		
<b>Cum Costs: Drilling</b>	\$0	<b>Completion</b>	\$0	<b>Well Total</b>	\$0		
<b>MD</b>	0	<b>TVD</b>	0	<b>Progress</b>	0	<b>Days</b>	0
<b>MW</b>	0.0	<b>Visc</b>	0.0				
<b>Formation :</b>	PBTD : 0.0			<b>Perf :</b>	PKR Depth : 0.0		

**Activity at Report Time: LOCATION DATA**

Start	End	Hrs	Activity Description
06:00	06:00	24.0	LOCATION DATA
			1936' FNL & 1754' FEL (SW/NE)
			SECTION 22, T9S, R22E
			UINTAH COUNTY, UTAH
			TRUE RIG #15
			OBJECTIVE: 9475' MESAVERDE
			CHAPITA WELLS DEEP PROSPECT
			CHAPITA WELLS UNIT
			DW/GAS
			LEASE: U-0284-A
			ELEVATION: 4932' NAT GL, 4930' PREP GL, 4945 KB (15')
			EOG WI 27.50%, NRI 28.65%
			WESTPORT WI 50%
			ST MARY WI 22.5%

02-08-2005      Reported By      ED TROTTER

**Daily Costs: Drilling** **Completion** **Daily Total**  
**Cum Costs: Drilling** **Completion** **Well Total**  
**MD** 9,420 **TVD** 9,420 **Progress** 0 **Days** 15 **MW** 0.0 **Visc** 0.0  
**Formation : MESAVERDE** **PBTD : 0.0** **Perf : 8917-9291** **PKR Depth : 0.0**

**Activity at Report Time: FLOW TEST**

Start	End	Hrs	Activity Description
06:00	06:00	24.0	3/10/2005: RU SCHLUMBERGER. RAN RST/CBL/VDL/GR/CCL FROM PBTD TO 900'. RD SCHLUMBERGER. CEMENT TOP @ 1400'.

3/17/2005: NU 10M BOPE. TESTED CASING & BOPE TO 6500 PSIG.

3/18/2005: RU CUTTERS WIRELINE. PERFORATED LPR FROM 9142'-44', 9176'-77', 9184'-85', 9217'-19', 9236'-39', 9268'-69' & 9290'-91' @ 2 SPF & 180° PHASING. RDWL. RU SCHLUMBERGER. FRAC DOWN CASING WITH 165 GAL GYPTRON T-106, 4957 GAL YF125ST PAD, 45,109 GAL YF125ST & YF118ST & 169,089# 20/40 SAND @ 1-8 PPG. MTP 6494 PSIG. MTR 49.5 BPM. ATP 5829 PSIG. ATR 45.3 BPM. ISIP 2900 PSIG. RD SCHLUMBERGER.

RUWL. SET 10K COMPOSITE FRAC PLUG @ 9120'. PERFORATED LPR FROM 8917'-18', 8936'-38', 8972'-73', 9006'-07', 9023'-24', 9038'-39', 9064'-65' & 9102'-03' @ 3 SPF & 120° PHASING. RDWL. RU SCHLUMBERGER. FRAC DOWN CASING WITH 165 GAL GYPTRON T-106, 4979 GAL YF125ST PAD, 36,654 GAL YF125ST & YF118ST & 130,715# 20/40 SAND @ 1-8 PPG. MTP 6299 PSIG. MTR 49.9 BPM. ATP 5663 PSIG. ATR 46.8 BPM. ISIP 3100 PSIG. RD SCHLUMBERGER.

RUWL. RIH WITH PLUG & GUNS. SET DOWN @ 5825'. WORKED PLUG DOWN TO 6423'. PLUG STUCK. SET PLUG & POH. RDWL.

FLOWED 19 HRS. 12/64" CHOKE. FCP 1900 PSIG. 30-40 BFPH. RECOVERED 790 BLW. 1821 BLWTR.

**03-20-2005** **Reported By** SEARLE

**Daily Costs: Drilling** **Completion** **Daily Total**  
**Cum Costs: Drilling** **Completion** **Well Total**  
**MD** 9,420 **TVD** 9,420 **Progress** 0 **Days** 16 **MW** 0.0 **Visc** 0.0  
**Formation : MESAVERDE** **PBTD : 0.0** **Perf : 8912-9291** **PKR Depth : 0.0**

**Activity at Report Time: FLOW TEST**

Start	End	Hrs	Activity Description
06:00	06:00	24.0	FLOWED 24 HRS. 16/64" CHOKE. FCP 2100 PSIG. 3-5 BFPH. LIGHT TO MODERATE CONDENSATE. RECOVERED 616 BLW. 1205 BLWTR.

**03-21-2005** **Reported By** SEARLE

**Daily Costs: Drilling** **Completion** **Daily Total**  
**Cum Costs: Drilling** **Completion** **Well Total**  
**MD** 9,420 **TVD** 9,420 **Progress** 0 **Days** 17 **MW** 0.0 **Visc** 0.0  
**Formation : MESAVERDE** **PBTD : 0.0** **Perf : 8912-9291** **PKR Depth : 0.0**

**Activity at Report Time: SI WAIT ON SU**

Start	End	Hrs	Activity Description
06:00	08:00	2.0	FLOWED 2 HRS. 16/64" CHOKE. FCP 2100 PSIG. 3-5 BFPH. LIGHT CONDENSATE. RECOVERED 8 BLW. 1197 BLWTR. SI. WO RIG.

**03-28-2005** **Reported By** HANSEN

<b>Daily Costs: Drilling</b>					<b>Completion</b>			<b>Daily Total</b>			
<b>Cum Costs: Drilling</b>					<b>Completion</b>			<b>Well Total</b>			
<b>MD</b>	9,420	<b>TVD</b>	9,420	<b>Progress</b>	0	<b>Days</b>	18	<b>MW</b>	0.0	<b>Visc</b>	0.0
<b>Formation : MESAVERDE</b>	<b>PBTD : 0.0</b>				<b>Perf : 8912-9291</b>		<b>PKR Depth : 0.0</b>				

Activity at Report Time: FLOW TEST

<b>Start</b>	<b>End</b>	<b>Hrs</b>	<b>Activity Description</b>								
24:00	06:00	6.0	SICP 3400 PSIG. FLOW 6 HRS. 16/64" CHOKE. FCP 2100 PSIG. 3-5 BFPH. RECOVERED 27 BLW. 1170 BLWTR. LIGHT CONDENSATE.								

03-29-2005 Reported By HANSEN

<b>Daily Costs: Drilling</b>					<b>Completion</b>			<b>Daily Total</b>			
<b>Cum Costs: Drilling</b>					<b>Completion</b>			<b>Well Total</b>			
<b>MD</b>	9,420	<b>TVD</b>	9,420	<b>Progress</b>	0	<b>Days</b>	19	<b>MW</b>	0.0	<b>Visc</b>	0.0
<b>Formation : MESAVERDE</b>	<b>PBTD : 0.0</b>				<b>Perf : 8912-9291</b>		<b>PKR Depth : 0.0</b>				

Activity at Report Time: DRILL PLUGS

<b>Start</b>	<b>End</b>	<b>Hrs</b>	<b>Activity Description</b>								
06:00	17:00	11.0	FLOWED 2 HRS. 16/64" CHOKE. FCP 2100 PSIG. 3-5 BFPH. RECOVERED 10 BLW. 1160 BLWTR.								

MIRU SWABCO WELL SERVICE. PUMPED 20 BBLs TREATED WATER DOWN CASING. RU CUTTERS WL. SET 10K COMPOSITE BRIDGE PLUG @ 6400'. RDWL. BLEW WELL DOWN. PUMPED 60 BBLs TREATED WATER DOWN CASING. RIH W/3-7/8" BIT & PUMP OFF SUB. CLEANED OUT & DRILLED OUT PLUGS @ 6400' & 6423'. RIH TO 8797'. SDFN. 1240 BLWTR.

03-30-2005 Reported By HANSEN

<b>Daily Costs: Drilling</b>					<b>Completion</b>			<b>Daily Total</b>			
<b>Cum Costs: Drilling</b>					<b>Completion</b>			<b>Well Total</b>			
<b>MD</b>	9,420	<b>TVD</b>	9,420	<b>Progress</b>	0	<b>Days</b>	20	<b>MW</b>	0.0	<b>Visc</b>	0.0
<b>Formation : MESAVERDE</b>	<b>PBTD : 9390.0</b>				<b>Perf : 8912-9291</b>		<b>PKR Depth : 0.0</b>				

Activity at Report Time: SI - WO FACILITIES

<b>Start</b>	<b>End</b>	<b>Hrs</b>	<b>Activity Description</b>								
06:30	14:00	7.5	SITP 0 PSIG (FLOAT). SICP 1900 PSIG. RIH. CLEANED OUT & DRILLED OUT PLUG @ 9120'. RIH. CLEANED OUT FROM 9304' TO PBTD @ 9390'. LANDED TUBING @ 8899' KB. ND BOPE. NU TREE. PUMPED OFF BIT & SUB. RDMOSU.								

FLOWED 3 HRS. 16/64" CHOKE. FTP 2050 PSIG. CP 2100 PSIG. 3-5 BFPH. RECOVERED 53 BLW. 1187 BLWTR. LIGHT CONDENSATE. SI. WO FACILITIES. FINAL REPORT UNTIL FURTHER ACTIVITY.

FINAL COMPLETION DATE 3/29/05

TUBING DETAIL: LENGTH:

PUMP OFF ASSEMBLY .91'  
 1 JT 2-3/8" 4.7# J55 TUBING 32.43'  
 XN NIPPLE 1.10'  
 272 JTS 2-3/8" 4.7# J55 TUBING 8849.10'  
 BELOW KB 15.00'  
 TUBING LANDED @ 8898.54' KB

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires: March 31, 2007

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

023

**SUBMIT IN TRIPLICATE- Other instructions on reverse side.**

1. Type of Well  
 Oil Well     Gas Well     Other

2. Name of Operator    **EOG RESOURCES, INC.**

3a. Address    **P.O. BOX 250 Big Piney WY, 83113**

3b. Phone No. (include area code)  
**307-276-3331**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**SECTION 22, T9S, R22E SW/NE 1936 FNL 1754 FEL 40.023442 LAT 109.422231 LON**

5. Lease Serial No.  
**U-0284-A**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.  
**CHAPITA WELLS UNIT**

8. Well Name and No.  
**CHAPITA WELLS 882-22**

9. API Well No.  
**43-047-35397**

10. Field and Pool, or Exploratory Area  
**NATURAL BUTTES**

11. County or Parish, State  
**UINTAH COUNTY, UT**

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input checked="" type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

**INITIAL PRODUCTION: The referenced well was turned to sales at 9:15 a.m., 4/04/2005 through Questar meter # 6674 on a 10/64" choke. Opening pressure, FTP 2700 psig, CP 3650 psig.**

**EOG Resources, Inc. operates under Nationwide Bond #2308**


**RECEIVED**  
**APR 08 2005**  
 DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct  
 Name (Printed/Typed)

**Kaylene R. Gardner**

Title **Regulatory Assistant**

Signature



Date

**04/05/2005**

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by \_\_\_\_\_

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

FORM APPROVED  
OMBNO. 1004-0137  
Expires: March 31, 2007

5. Lease Serial No. U-0284-A

6. If Indian, Allottee or Tribe Name

7. Unit or CA Agreement Name and No. **CHAPITA WELLS UNIT**

8. Lease Name and Well No. **CWU 882-22**

9. AFI Well No. **43-047-35397**

10. Field and Pool, or Exploratory **NATURAL BUTTES/MESAVE**

11. Sec., T., R., M., on Block and Survey or Area **22, T9S, R22E**

12. County or Parish **UINTAH** 13. State **UT**

14. Date Spudded **12/29/2004** 15. Date T.D. Reached **03/02/2005** 16. Date Completed **04/04/2005**  
 D & A  Ready to Prod. 17. Elevations (DF, RKB, RT, GL)\* **4945 KB**

18. Total Depth: MD **9420** TVD **9420** 19. Plug Back T.D.: MD **9390** TVD **9390** 20. Depth Bridge Plug Set: MD **9390** TVD **9390**

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)  
**RST/CBL/VDL/GR/CCL**

22. Was well cored?  No  Yes (Submit analysis)  
Was DST run?  No  Yes (Submit report)  
Directional Survey?  No  Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12-1/4	9-5/8	J-55	36#	0-2432		1020			
7-7/8	4-1/2	N-80	11.6#	0-9420		1945			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-3/8	8899							

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) MESAVERDE	8917	9291	9142-9291		2/SPF	
B)			8917-9103		3/SPF	
C)						
D)						

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

Depth Interval	Amount and Type of Material
9142-9291	1192 BBLs GELLED WATER & 169,089 # 20/40 SAND
8917-9103	991 BBLs GELLED WATER & 130,715# 20/40 SAND

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
04/04/2005	04/11/2005	24	→	22	531	74			FLOWS FROM WELL
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
10/64	SI 1710	2000	→	22	531	74			PRODUCING GAS WELL

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

\*(See instructions and spaces for additional data on page 2)

RECEIVED  
MAY 05 2005

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

29. Disposition of Gas (Sold, used for fuel, vented, etc.)

**SOLD**

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
MESAVERDE	8917	9291		<b>WASATCH</b> <b>CHAPITA WELLS</b> <b>BUCK CANYON</b> <b>NORTH HORN</b> <b>ISLAND</b> <b>MESAVERDE BUGTOP</b> <b>MIDDLE PRICE RIVER</b> <b>LOWER PRICE RIVER</b> <b>SEGO</b>	<b>4763</b> <b>5357</b> <b>6071</b> <b>6714</b> <b>7153</b> <b>7445</b> <b>8111</b> <b>8867</b> <b>9363</b>

32. Additional remarks (include plugging procedure):

**TURNED TO SALES THROUGH QUESTAR METER # 6674. Two 400 bbl tanks # 80571V & 80572V are on location. Perforated the Lower Price River from 9142-44', 9176-77', 9184-85', 9217-19', 9236-39', 9268-69' & 9290-91' w/2 SPF. Perforated the Lower Price River from 8917-18', 8936-38', 8972-73', 9006-07', 9023-24', 9038-39', 9064-65' & 9102-03' w/3 SPF.**


33. Indicate which items have been attached by placing a check in the appropriate boxes:

- Electrical/Mechanical Logs (1 full set req'd.)   
  Geologic Report   
  DST Report   
  Directional Survey  
 Sundry Notice for plugging and cement verification   
  Core Analysis   
  Other:

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)\*

Name (please print) Kaylene R. Gardner

Title Regulatory Assistant

Signature 

Date 05/03/2005

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires: March 31, 2007

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

**SUBMIT IN TRIPLICATE- Other instructions on reverse side.**

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. <b>U-0284-A</b>
2. Name of Operator <b>EOG RESOURCES, INC.</b>		6. If Indian, Allottee or Tribe Name
3a. Address <b>P.O. BOX 250 Big Piney WY, 83113</b>	3b. Phone No. (include area code) <b>307-276-3331</b>	7. If Unit or CA/Agreement, Name and/or No. <b>CHAPITA WELLS UNIT</b>
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) <b>SWNE 1936 FNL 1754 FEL 40.023442 LAT 109.422231 LON SECTION 22, T9S, R22E</b>		8. Well Name and No. <b>CWU 882-22</b>
		9. API Well No. <b>43-047-35397</b>
		10. Field and Pool, or Exploratory Area <b>NATURAL BUTTES/MESAVERDE</b>
		11. County or Parish, State <b>UINTAH COUNTY, UT</b>

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <b>CONTINUED</b>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<b>COMPLETION</b>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. continued completion of the referenced well opening additional pay in the Measverde as follows:

- Set 10k composite frac plug @ 8903'. Perforated the Middle Price River from 8615-17', 8653-55', 8766-68', 8832-35', 8856-57' & 8871-73' w/2 SPF. Fracture stimulated with 1368 bbls gelled water & 208,416 # 20/40 sand.
- Set 10k composite frac plug @ 8598'. Perforated the Middle Price River from 8394-95', 8435-38', 8468-69', 8525-27', 8557-58' & 8567-68' w/3 SPF. Fracture stimulated with 1205 bbls gelled water & 171,025 # 20/40 sand. Fracture stimulated with 171,025 # 20/40 sand.
- Set 10k composite frac plug @ 8360'. Perforated the Middle Price River from 8180-82', 8206-08', 8251-53', 8271-73', 8295-97' & 8320-22' w/2 SPF. Fracture stimulated with 1499 bbls gelled water & 240,452 # 20/40 sand.
- Set 10k composite frac plug @ 8155'. Perforated the Upper Price River from 7921-23', 7964-66', 8003-05', 8045-47', 8093-95' & 8123-25' w/2 SPF. Fracture stimulated with 1501 bbls gelled water & 241,084 # 20/40 sand.
- Set 10k composite frac plug @ 7881'. Perforated the Upper Price River from 7666-67', 7718-20', 7768-70', 7829-32' & 7849-51' w/2 SPF. Fracture stimulated with 1352 bbls gelled water & 169,809 # 20/40 sand.
- Set 10k composite frac plug @ 7610'. Perforated the Upper Price River from 7472-74', 7494-95', 7503-04', 7512-13', 7545-47', 7560-61', 7569-71' & 7594-96' w/2 SPF. Fracture stimulated with 1410 bbls gelled water & 223,635 # 20/40 sand. Set 10k composite frac plug @ 7436'. Drilled out composite frac plugs @ 7436', 7610', 7881', 8155', 8360', 8598' & 8903'. Tubing landed @ 7435'. Returned to sales 5/12/2005 through Questar meter # 6674.


TEST: 5/18/05, 878 MCF, 50 BO, 271 BW in 24 hours on 12/64" choke. FTP 1800, CP 2600 psig.

14. I hereby certify that the foregoing is true and correct  
Name (Printed/Typed)

**Kaylene R. Gardner**

Title **Regulatory Assistant**

Signature



Date

**06/01/2005**

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**RECEIVED**

(Instructions on page 2)

**JUN 06 2005**

DIV. OF OIL, GAS & MINING

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires: March 31, 2007

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

**SUBMIT IN TRIPLICATE- Other instructions on reverse side.**

1. Type of Well  
 Oil Well     Gas Well     Other

2. Name of Operator    **EOG Resources, Inc.**

3a. Address  
**600 17th Street, Suite 1000N, Denver, CO 80202**

3b. Phone No. (include area code)  
**303-824-5526**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

**1936' FNL & 1754' FEL (SW/NE)  
 Sec. 22-T9S-R22E 40.023442 LAT 109.422231 LON**

5. Lease Serial No.

**U-0284-A**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

**Chapita Wells Unit**

8. Well Name and No

**Chapita Wells Unit 882-22**

9. API Well No.

**43-047-35397**

10. Field and Pool, or Exploratory Area

**Natural Buttes/Wasatch/Mesaverde**

11. County or Parish, State

**Uintah County, Utah**

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <b>Pit reclamation</b>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

**The reserve pit for the referenced location was closed on 6/2/2006 as per the APD procedure.**

14. I hereby certify that the foregoing is true and correct  
 Name (Printed/Typed)

**Mary A. Maestas**

Title **Regulatory Assistant**

Signature

*Mary A. Maestas*

Date

**01/09/2007**

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

RECEIVED

JAN 10 2007

DIV. OF OIL, GAS & MINING