

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

001

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU-037166
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator WESTPORT OIL AND GAS COMPANY		7. If Unit or CA Agreement, Name and No.
Contact: RALEEN SEARLE E-Mail: rsearle@westportresourcescorp.com		8. Lease Name and Well No. FEDERAL 1022-33G
3a. Address 1368 SOUTH 1200 EAST VERNAL, UT 84078	3b. Phone No. (include area code) Ph: 435.781.7044 Fx: 435.781.7094	9. API Well No. 4304735742
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface SWNE 1650FNL 2052FEL 39.90817 N Lat, 109.44261 W Lon At proposed prod. zone 633173 X 39.90811 4418510 Y -109.44202		10. Field and Pool, or Exploratory NATURAL BUTTES
14. Distance in miles and direction from nearest town or post office* 54 +/- MILES FROM VERNAL, UT		11. Sec., T., R., M., or Blk. and Survey or Area Sec 33 T10S R22E Mer SLB SME: BLM
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1650' +/-	16. No. of Acres in Lease 560.00	12. County or Parish UINTAH
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. REFER TO TOPO C	19. Proposed Depth 8500 MD	13. State UT
21. Elevations (Show whether DF, KB, RT, GL, etc.) 5531 GL	22. Approximate date work will start	17. Spacing Unit dedicated to this well 40.00
		20. BLM/BIA Bond No. on file CO-1203
		23. Estimated duration

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|--|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature (Electronic Submission) <i>Raleen Searle</i>	Name (Printed/Typed) RALEEN SEARLE	Date 05/14/2004
Title PREPARER		
Approved by (Signature) <i>Bradley G. Hill</i>	Name (Printed/Typed) BRADLEY G. HILL	Date 05-01-04
Title	Office ENVIRONMENTAL SCIENTIST III	

Federal Approval of this Action is Necessary

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

Electronic Submission #30723 verified by the BLM Well Information System
For WESTPORT OIL AND GAS COMPANY, sent to the Vernal

RECEIVED
MAY 18 2004
DIV. OF OIL, GAS & MINING

** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED **


T10S, R22E, S.L.B.&M.

WESTPORT OIL AND GAS COMPANY, L.P.

1991 Alum. Cap,
0.3' High, Pile
of Stones

1991 Alum. Cap,
0.3' High, Pile
of Stones

Well location, FEDERAL #1022-33G, located as shown in the SW 1/4 NE 1/4 of Section 33, T10S, R22E, S.L.B.&M. Uintah County, Utah.

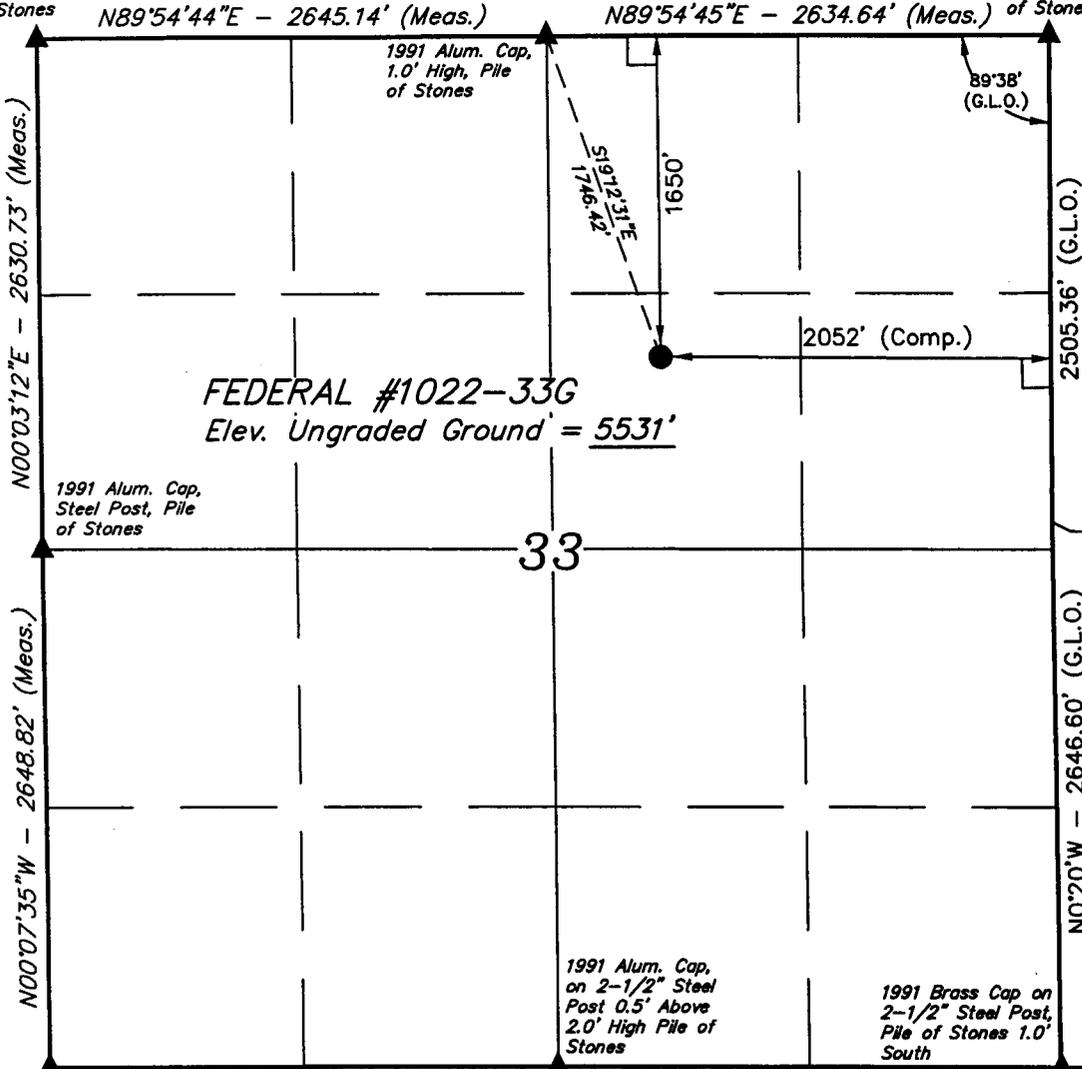


BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

BASIS OF BEARINGS


BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

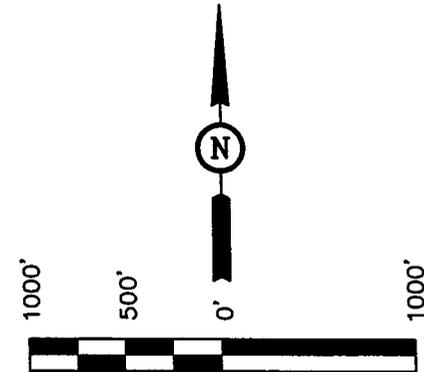

SCALE

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT AND PREPARED FROM FIELD NOTES OF ACTUAL SURVEY MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

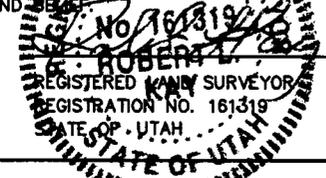

1991 Alum. Cap, 589°56'56"W - 2641.74' (Meas.)
Pile of Stones

N89°51'17"W - 2642.52' (Meas.)

LEGEND:

└─┘ = 90° SYMBOL

● = PROPOSED WELL HEAD.

▲ = SECTION CORNERS LOCATED.

(NAD 83)

LATITUDE = 39°54'29.40" (39.908167)

LONGITUDE = 109°26'33.40" (109.442611)

UINTAH ENGINEERING & LAND SURVEYING
85 SOUTH 200 EAST - VERNAL, UTAH 84078
(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 3-22-04	DATE DRAWN: 3-29-04
PARTY G.O. K.G. C.G.	REFERENCES G.L.O. PLAT	
WEATHER COOL	FILE	WESTPORT OIL AND GAS COMPANY, L.P.

**FEDERAL #1022-33G
SW/NE SECTION 33, T10S, R22E
UINTAH COUNTY, UTAH
UTU-037166**

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. Estimated Tops of Important Geologic Markers:

<u>Formation</u>	<u>Depth</u>
Uinta	0- Surface
Green River	1000'
Wasatch	4050'
Mesaverde	6450'
TD	8500'

2. Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
	Green River	1000'
Gas	Wasatch	4050'
Gas	Mesaverde	6450'
Water	N/A	
Other Minerals	N/A	

3. Pressure Control Equipment (Schematic Attached)

Please refer to the attached Drilling Program.

4. Proposed Casing & Cementing Program:

Please refer to the attached Drilling Program.

5. Drilling Fluids Program:

Please refer to the attached Drilling Program.

6. Evaluation Program:

Please refer to the attached Drilling Program.

7. Abnormal Conditions:

Maximum anticipated bottomhole pressure calculated at 8500' TD, approximately equals 3400 psi (calculated at 0.4 psi/foot).

Maximum anticipated surface pressure equals approximately 1530 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. **Anticipated Starting Dates:**

Drilling is planned to commence immediately upon approval of this application.

9. **Variances:**

Please refer to the attached Drilling Program.

10. **Other Information:**

Please refer to the attached Drilling Program.



Westport Oil and Gas Company, L.P.
DRILLING PROGRAM

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'				2270	1370	254000
SURFACE	9-5/8"	0 to 1700	32.30	H-40	STC	0.89	1.72	5.28
PRODUCTION	4-1/2"	0 to 8500	11.60	M-80 or I-80	LTC	3.05	1.44	201000

- 1) Max Anticipated Surf. Press. (MASP) (Surface Casing) = (Pore Pressure at next csg point - (0.22 psi/ft - partial evac gradient x TVD of next csg point))
 2) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft - partial evac gradient x TD)
 (Burst Assumptions: TD = 10.0 ppg) .22 psi/ft = gradient for partially evac wellbore
 (Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing * Buoy. Fact. of water)
 MASP 2550 psi

***** Burst SF is low but csg is much stronger than formation at 2000'. EMW @ 2000' for 2270# is 21.8 ppg or 1.13 psi/ft

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	LEAD	500	Premium cmt + 2% CaCl + .25 pps flocele	215	60%	15.60	1.18
Option 1	TOP OUT CMT (1)	200	20 gals sodium silicate + Premium cmt + 2% CaCl + .25 pps flocele	50		15.60	1.18
	TOP OUT CMT (2)	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
SURFACE			NOTE: If well will circulate water to surface, option 2 will be utilized				
Option 2	LEAD	1500	Prem cmt + 16% Gel + 10 pps gilsonite + .25 pps Flocele + 3% salt BWOC	170	35%	11.00	3.82
	TAIL	500	Premium cmt + 2% CaCl + .25 pps flocele	180	35%	15.60	1.18
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
PRODUCTION	LEAD	3,550'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	390	60%	11.00	3.38
	TAIL	4,950'	50/50 Poz/G + 10% salt + 2% gel + .1% R-3	1390	60%	14.30	1.31

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained
 *Substitute caliper hole volume plus 15% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

ADDITIONAL INFORMATION



Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.
 BOPE: 11" 3M with one annular and 2 rams. Test to 3,000 psi (annular to 1,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.
 Drop Totco surveys every 2000'. Maximum allowable hole angle is 5 degrees.

DRILLING ENGINEER: _____
 Brad Laney
 DRILLING SUPERINTENDENT: _____
 Randy Bayne DHD_FED1022-33G_APD

DATE: _____
 DATE: _____

3,000 PSI

BOP STACK

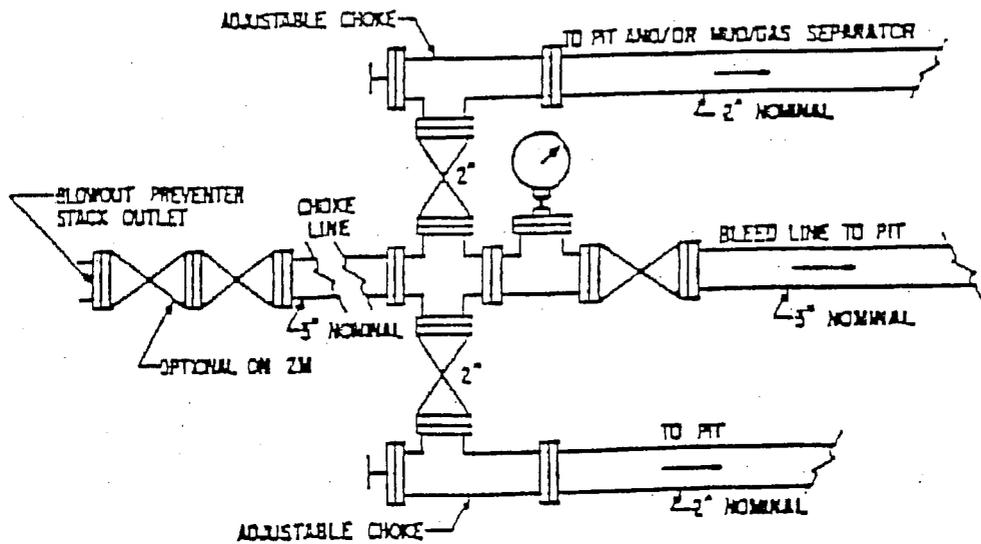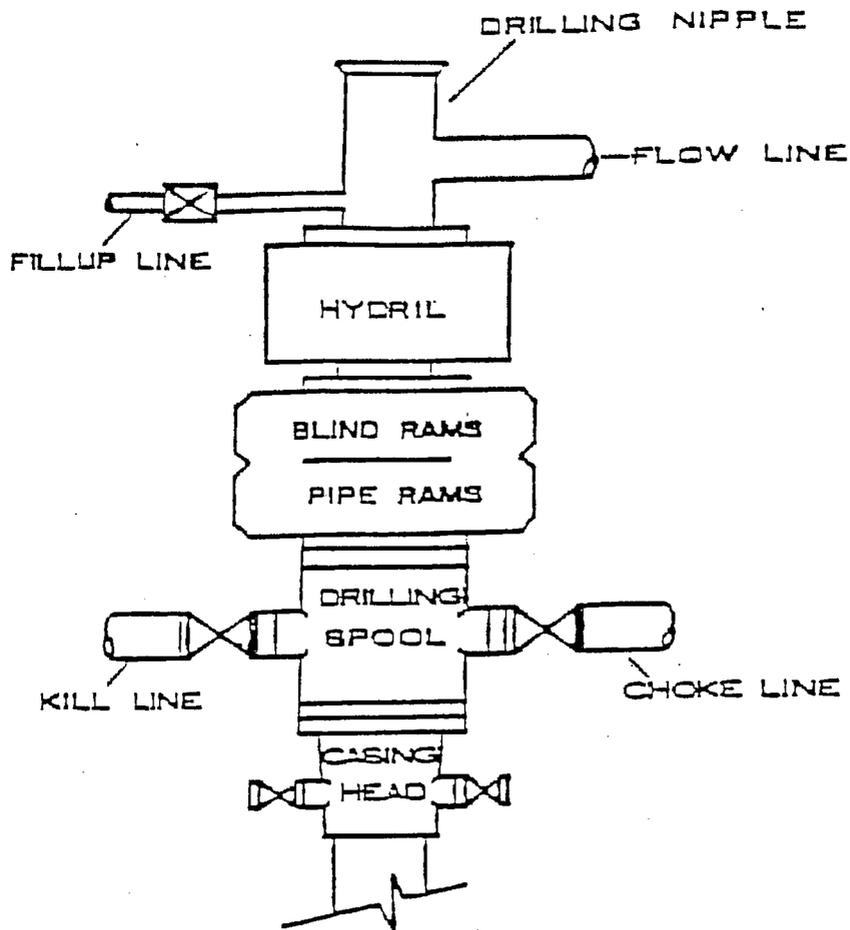

FEDERAL #1022-33G
SW/NE SECTION 33, T10S, R22E
UINTAH COUNTY, UTAH
U-037166

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. Existing Roads:

Directions to the proposed location are attached.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

2. Planned Access Roads:

The proposed access road is approximately 0.5 miles +/- . Refer to Topo Map B.

The access road will be crowned (2 to 3%), ditched and constructed with a running surface of 18 feet and a maximum disturbed width of 30 feet. Graveling or capping the roadbed will be performed as necessary to provide a well constructed, safe road. Prior to construction or upgrading, the proposed road shall be cleared of any snow and allowed to dry completely.

Surface disturbance and vehicular traffic will be limited to the proposed location and proposed access route. Any additional area needed will be approved in advance. All construction shall be in conformance with the standards outlined in the BLM and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development. 1989.

The road surface and shoulders will be kept in a safe and usable condition and will be maintained in accordance with the original construction standards. All drainage ditches will be kept clear and free-flowing and will be maintained according to original construction standards. The access road surface will be kept free of trash during operations. All traffic will be confined to the approved disturbed surface. Road drainage crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing or shall the drainages be blocked by the road bed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Should mud holes develop, they shall be filled in and detours around them avoided. When snow is removed from the road during the winter months, the snow shall be pushed outside of the borrow ditches, and the turnouts kept clear so that snowmelt will be channeled away from the road.

3. Location of Existing Wells Within a 1-Mile Radius:

Please refer to Topo Map C.

4. Location of Existing & Proposed Facilities & Pipelines:

The following guidelines will apply if the well is productive.

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The requested color is Carlsbad Canyon (2.5 Y 6/2) as determined during the on-site inspection.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

Approximately 2600' of up to 6" pipeline is proposed. The pipeline will be butt-welded together. Refer to Topo Map D for the placement of the proposed pipeline.

5. Location and Type of Water Supply:

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec.32, T4S,R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

6. Source of Construction Materials:

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

7. Methods of Handling Waste Materials:

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge of liquids.

A plastic reinforced liner is to be used as discussed during on-site inspection. It will be a minimum of 16 mil thick and felt, with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec.35, T9S, R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E. (Request is in lieu of filing Form 3160-5, after initial production).

8. Ancillary Facilities:

None are anticipated.

9. Well Site Layout: (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

The net wire shall be no more than two inches above the ground. The barbed wire shall be three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

10. Plans for Reclamation of the Surface:

Producing Location:

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water (s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling, and recontouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

Dry Hole/Abandoned Location:

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations.

11. Surface Ownership:

United States of America
Bureau of Land Management
170 South 500 East
Vernal, UT 84078
(435) 789-1362

12. Wildlife Stipulations:

Antelope Stipulations:

No drilling or construction commence drilling the antelope season which is from May 15 to June 20.

13. Other Information:

A Class III archaeological survey and a paleontological survey will be submitted when they are received by our office.

This location is not within 460' from the boundary of the Natural Buttes Unit, nor is it within 460' of any non-committed tract lying within the boundaries of the unit.

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance. The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

Seed Mixture:

Black Sage	1 lb/acre
Shadscale	3 lb/acre
Indian Rice Grass	4 lb/acre
Needle and Thread	4 lb/acre

13. Lessee's or Operators's Representative & Certification:

Raleen Searle
Regulatory Administrator
Westport O&G Co.
1368 South 1200 East
Vernal, UT 84078
(435) 781-7044

Randy Bayne
Drilling Manager
Westport O&G Co.
1368 South 1200 East
Vernal, UT 84078
(435)781-7018

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Westport Oil & Gas Company is considered to be the operator of the subject well. Westport Oil & Gas Company agrees to be responsible under the terms and the conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for the lease activities is being provided by BLM Nationwide Bond #CO-1203.

I hereby certify that the proposed drill site and access route has been inspected and that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.


/s/ Raleen Searle
Raleen Searle

May 13, 2004
Date

WESTPORT OIL AND GAS COMPANY, L.P.
FEDERAL #1022-33G
SECTION 33, T10S, R22E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED ALONG THE SEEP RIDGE ROAD APPROXIMATELY 11.2 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 9.6 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 1.1 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE BEGINNING OF THE PROPOSED ACCESS FOR THE STATE #1022-32H TO THE EAST; FOLLOW ROAD FLAGS IN A EASTERLY DIRECTION APPROXIMATELY 0.1 MILES TO THE BEGINNING OF THE PROPOSED ACCESS FOR THE STATE #1022-32I TO THE SOUTH; FOLLOW ROAD FLAGS IN A SOUTHERLY, THEN SOUTHEASTERLY, THEN SOUTHERLY DIRECTION APPROXIMATELY 0.3 MILES TO THE BEGINNING OF THE PROPOSED ACCESS FOR THE FEDERAL #1022-33L TO THE EAST; FOLLOW ROAD FLAGS IN A EASTERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE BEGINNING OF THE PROPOSED ACCESS FOR THE FEDERAL #1022-33G TO THE NORTHEAST; FOLLOW ROAD FLAGS IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.5 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 54.2 MILES.

WESTPORT OIL AND GAS COMPANY, L.P.


TYPICAL CROSS SECTIONS FOR

FEERAL #1022-33G

SECTION 33, T10S, R22E, S.L.B.&M.


1650' FNL 2052' FEL

FIGURE #2

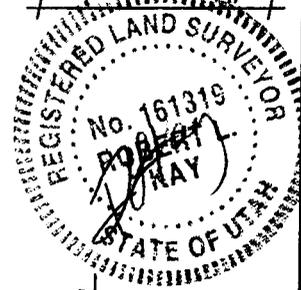

1" = 20'
X-Section Scale
1" = 50'

DATE: 3-29-04
Drawn By: C.G.

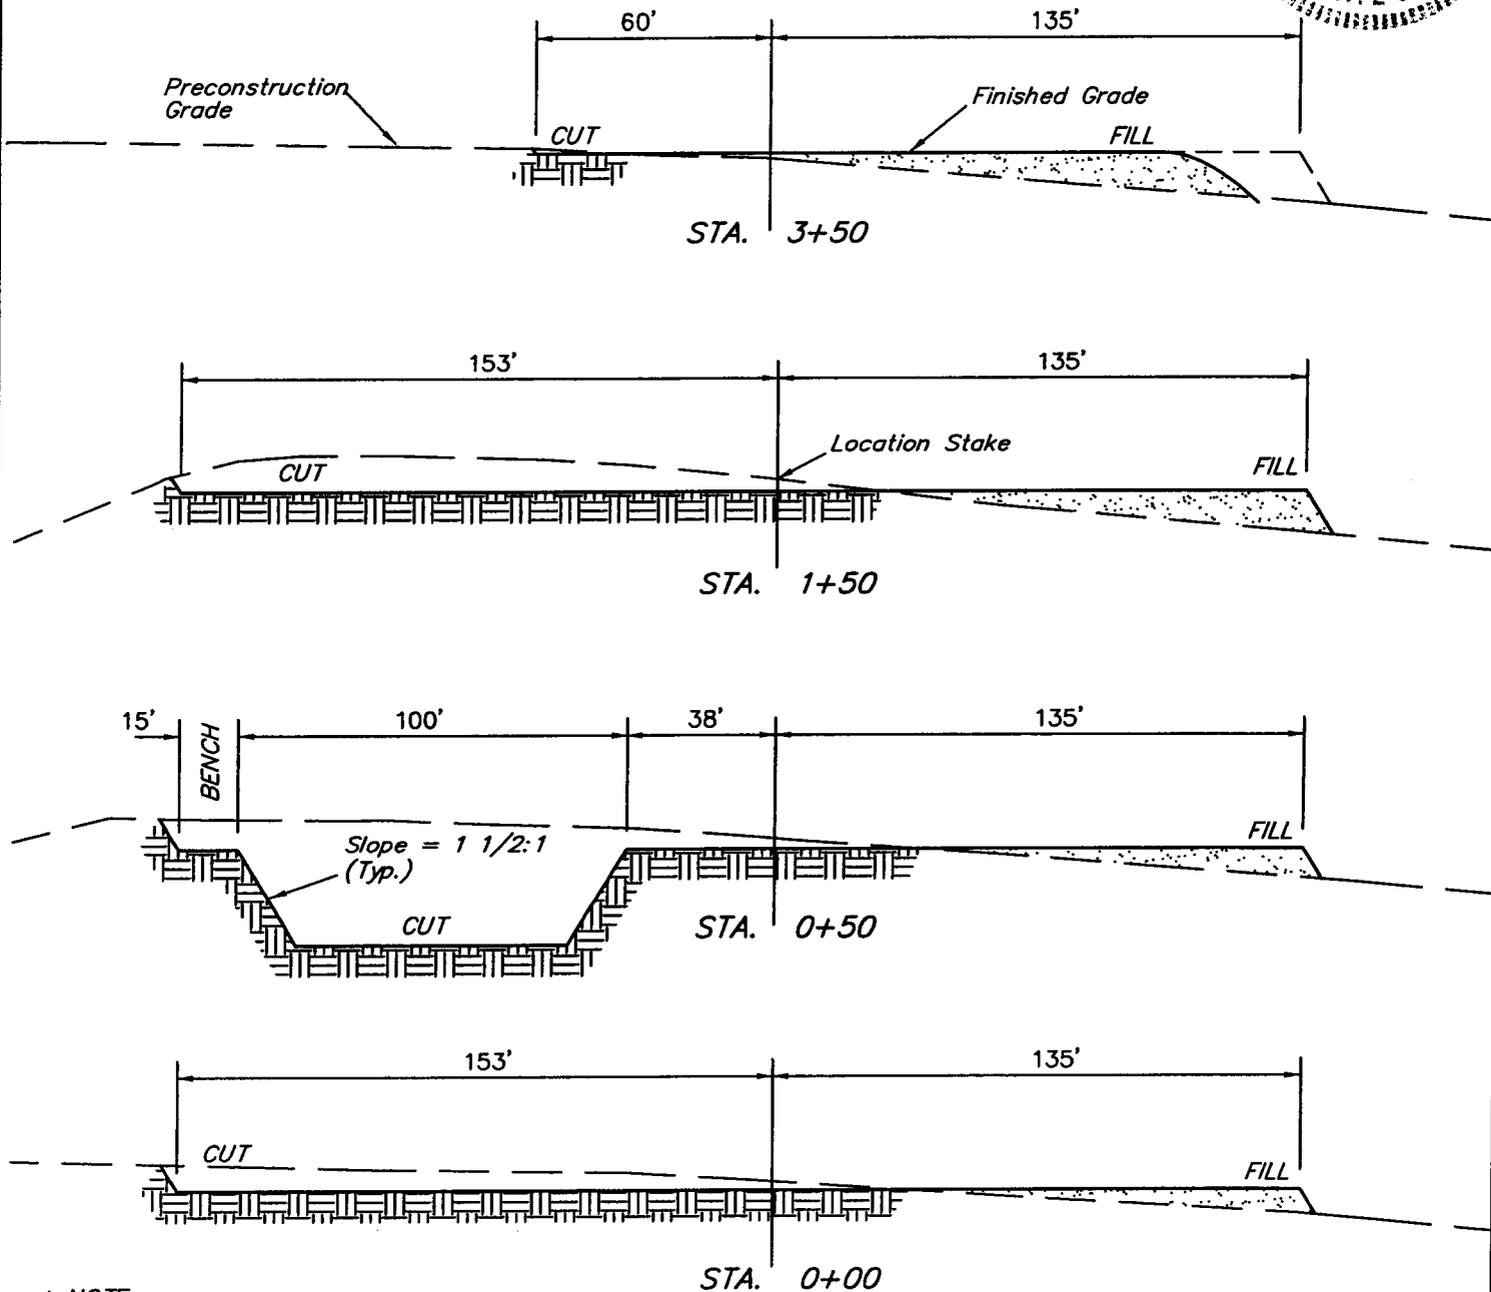

* NOTE:
FILL QUANTITY INCLUDES
5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,730 Cu. Yds.
Remaining Location	= 6,570 Cu. Yds.
TOTAL CUT	= 8,300 CU.YDS.
FILL	= 4,610 CU.YDS.

EXCESS MATERIAL	= 3,690 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,690 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.


UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

WESTPORT OIL AND GAS COMPANY, L.P.

FIGURE #1



LOCATION LAYOUT FOR

FEERAL #1022-33G
SECTION 33, T10S, R22E, S.L.B.&M.
1650' FNL 2052' FEL

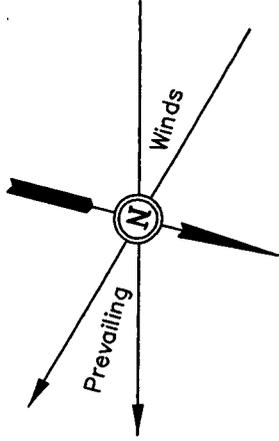


SCALE: 1" = 50'
DATE: 3-29-04
Drawn By: C.G.

NOTE:
Flare Pit is to be located a min. of 100' from the Well Head.

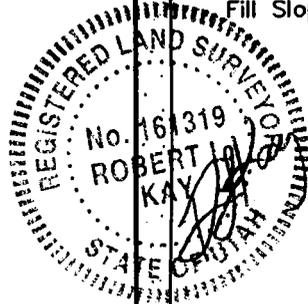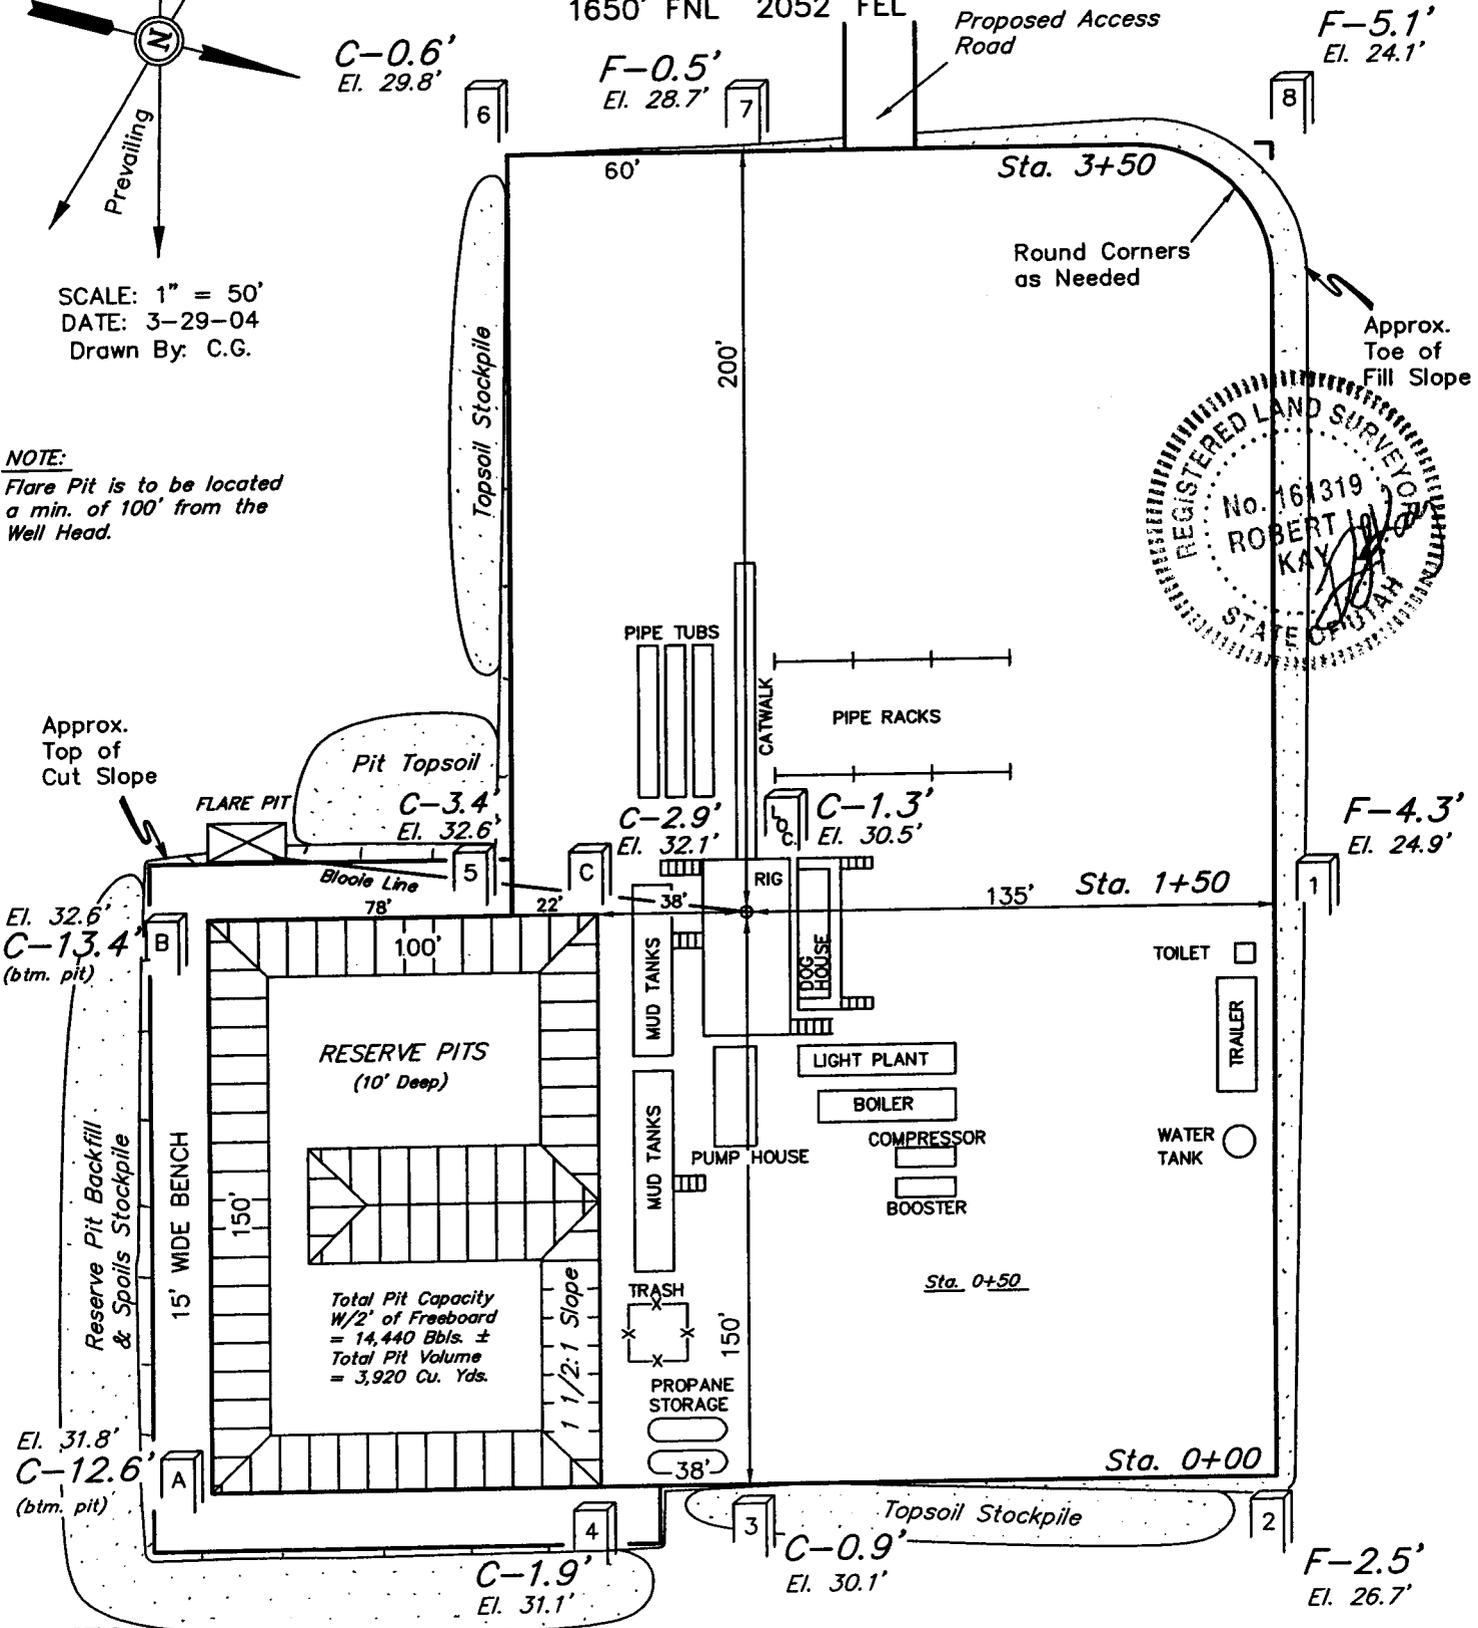

NOTES:

Elev. Ungraded Ground At Loc. Stake = 5530.5'
FINISHED GRADE ELEV. AT LOC. STAKE = 5529.2'

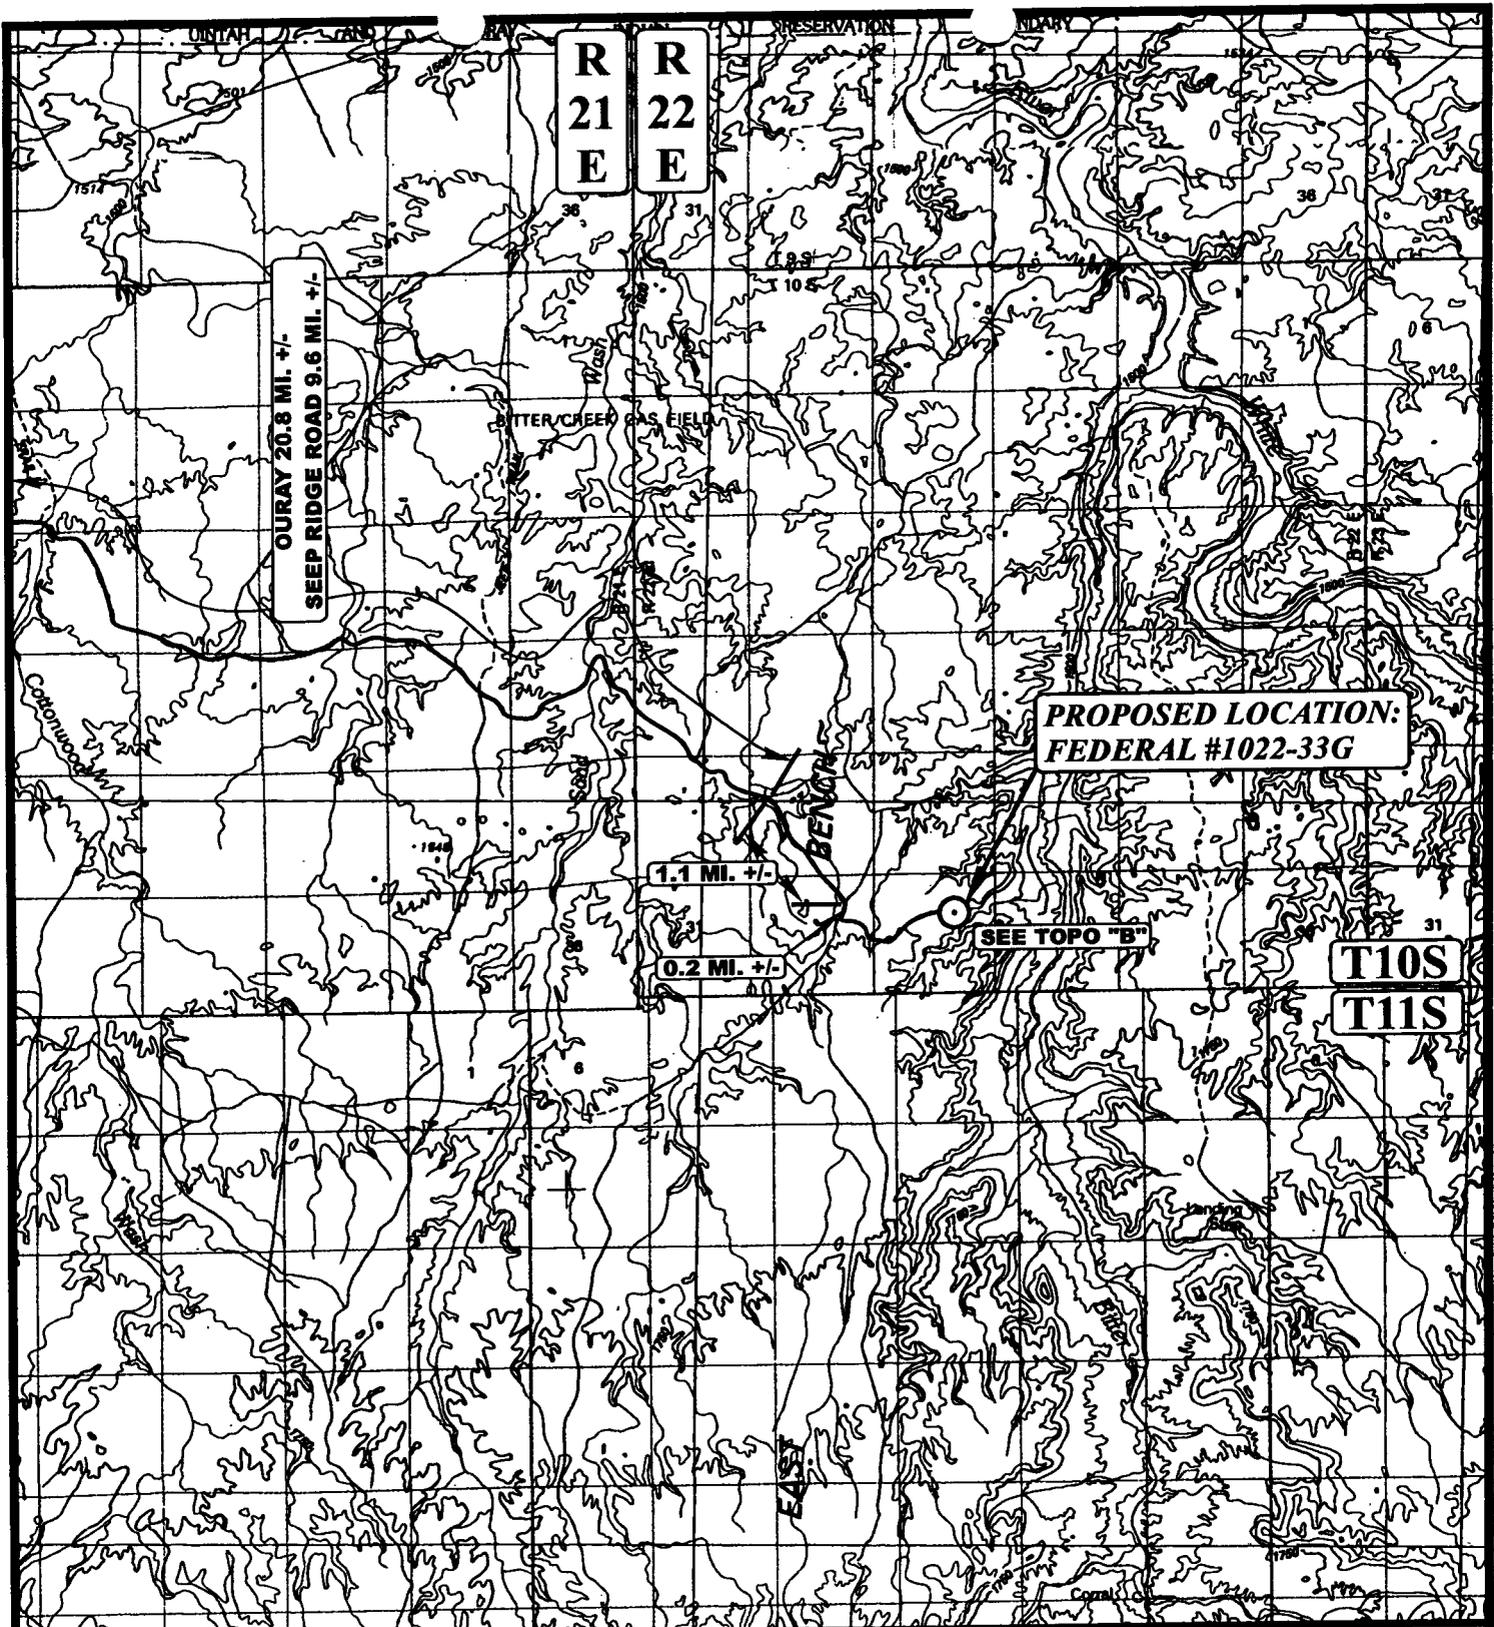

LEGEND:

⊙ PROPOSED LOCATION



WESTPORT OIL AND GAS COMPANY, L.P.

FEDERAL #1022-33G
SECTION 33, T10S, R22E, S.L.B.&M.
1650' FNL 2052' FEL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

3	24	04
MONTH	DAY	YEAR

SCALE: 1:100,000 DRAWN BY: K.G. REV: 5-5-04 K.G.



WESTPORT OIL AND GAS COMPANY, L.P.

FEDERAL #1022-33G

LOCATED IN UINTAH COUNTY, UTAH
SECTION 33, T10S, R22E, S.L.B.&M.

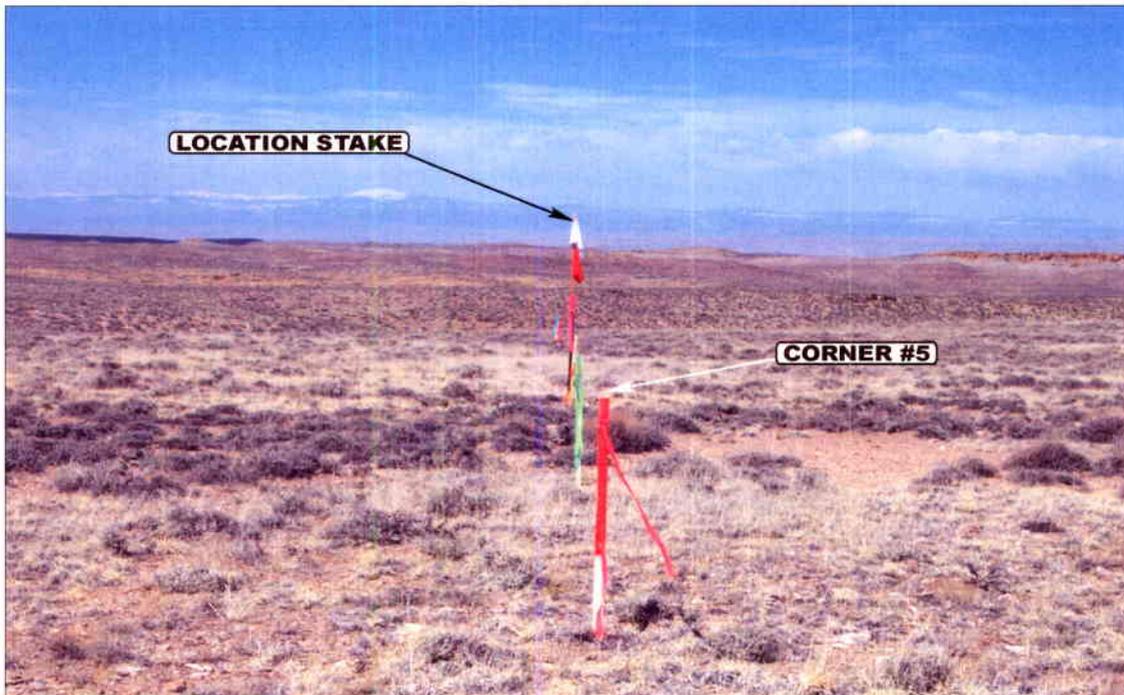


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHERLY



PHOTO: VIEW FROM PROPOSED ACCESS

CAMERA ANGLE: NORTHEASTERLY



- Since 1964 -

UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS


03 24 04
MONTH DAY YEAR

PHOTO

TAKEN BY: G.O.

DRAWN BY: T.H.

REVISED: 00-00-00

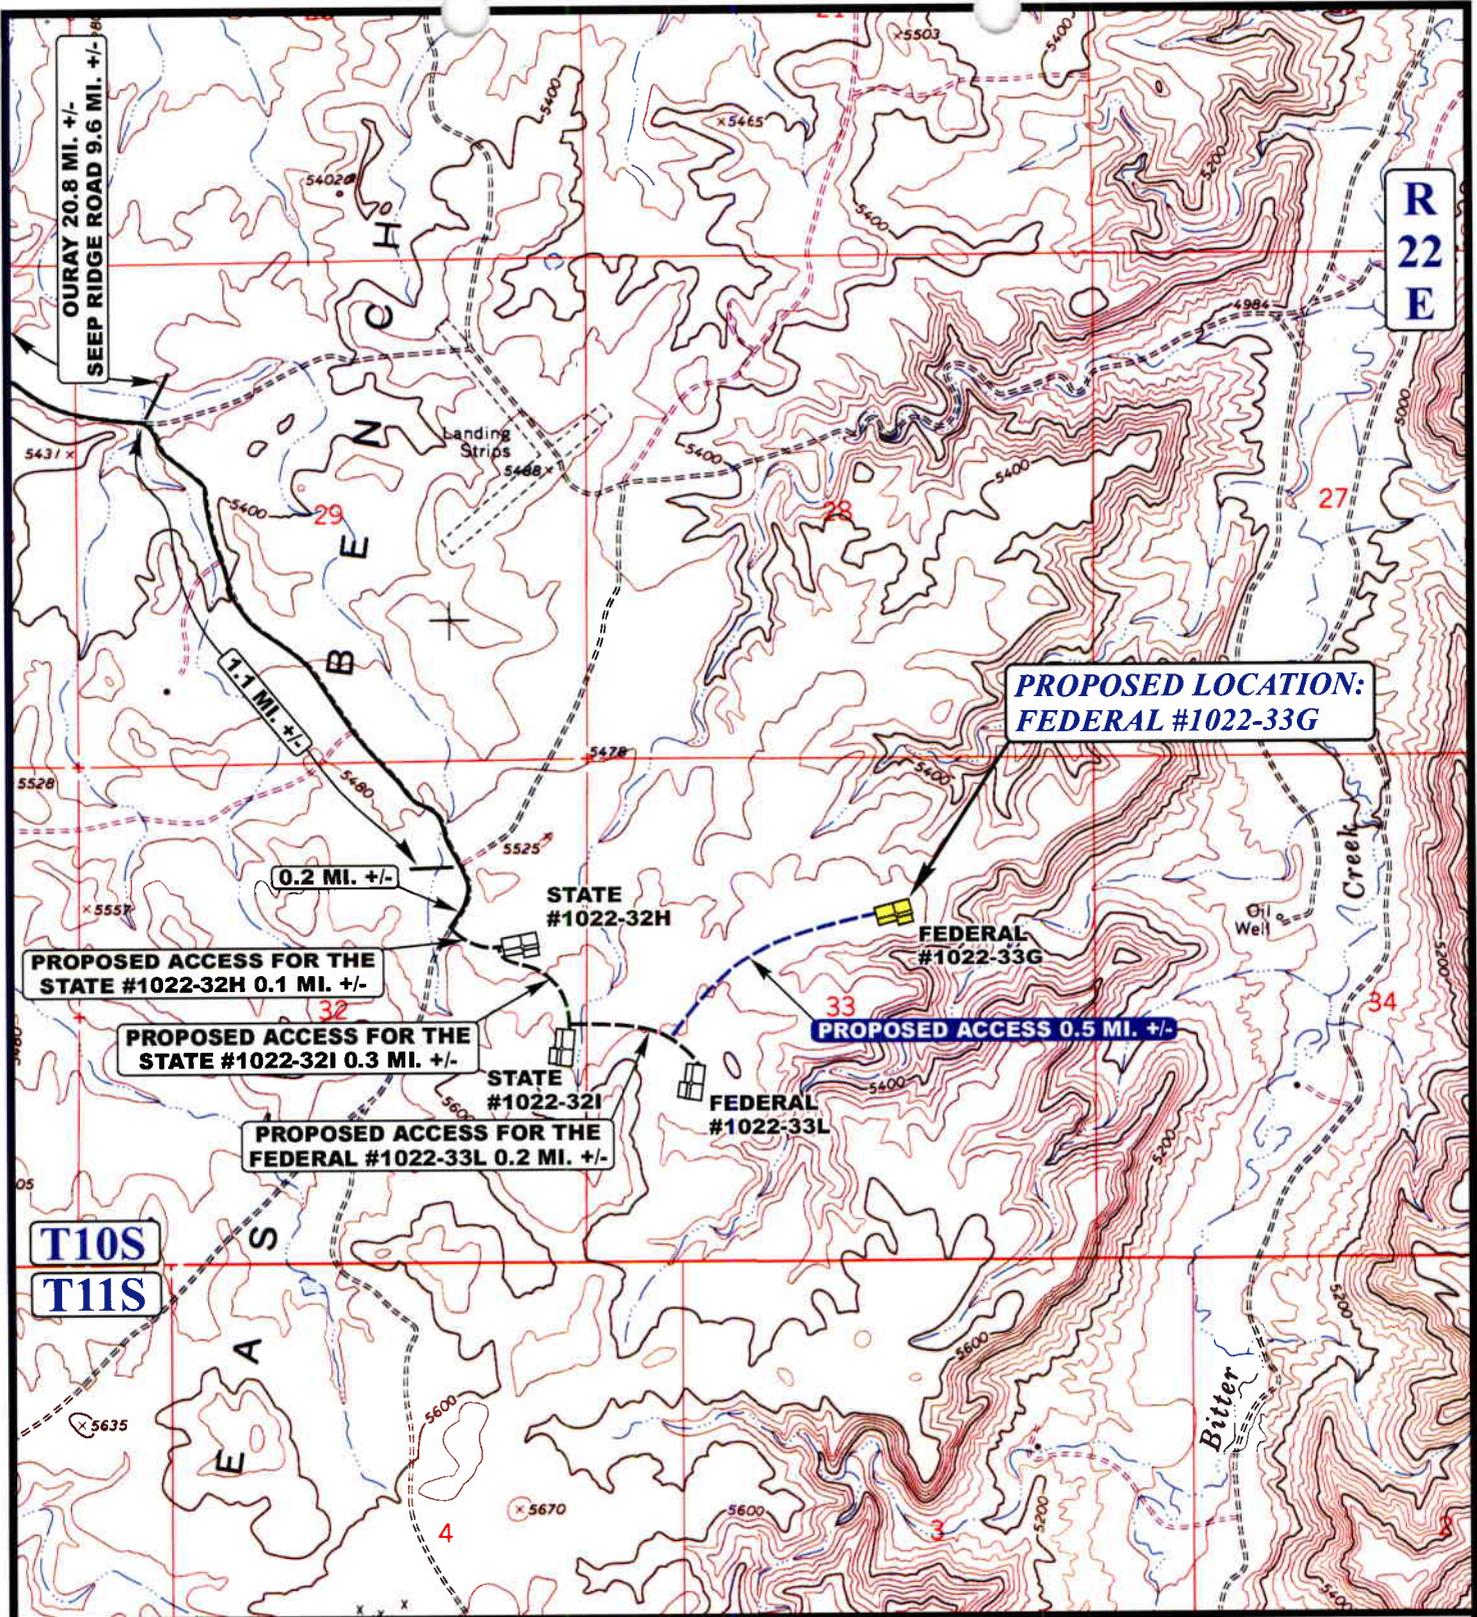

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING ROAD



WESTPORT OIL AND GAS COMPANY, L.P.

FEDERAL #1022-33G
SECTION 33, T10S, R22E, S.L.B.&M.
1650' FNL 2052' FEL




Utah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

03 MONTH
24 DAY
04 YEAR

SCALE: 1" = 2000' DRAWN BY: T.H. REV: 5-5-04 K.G.



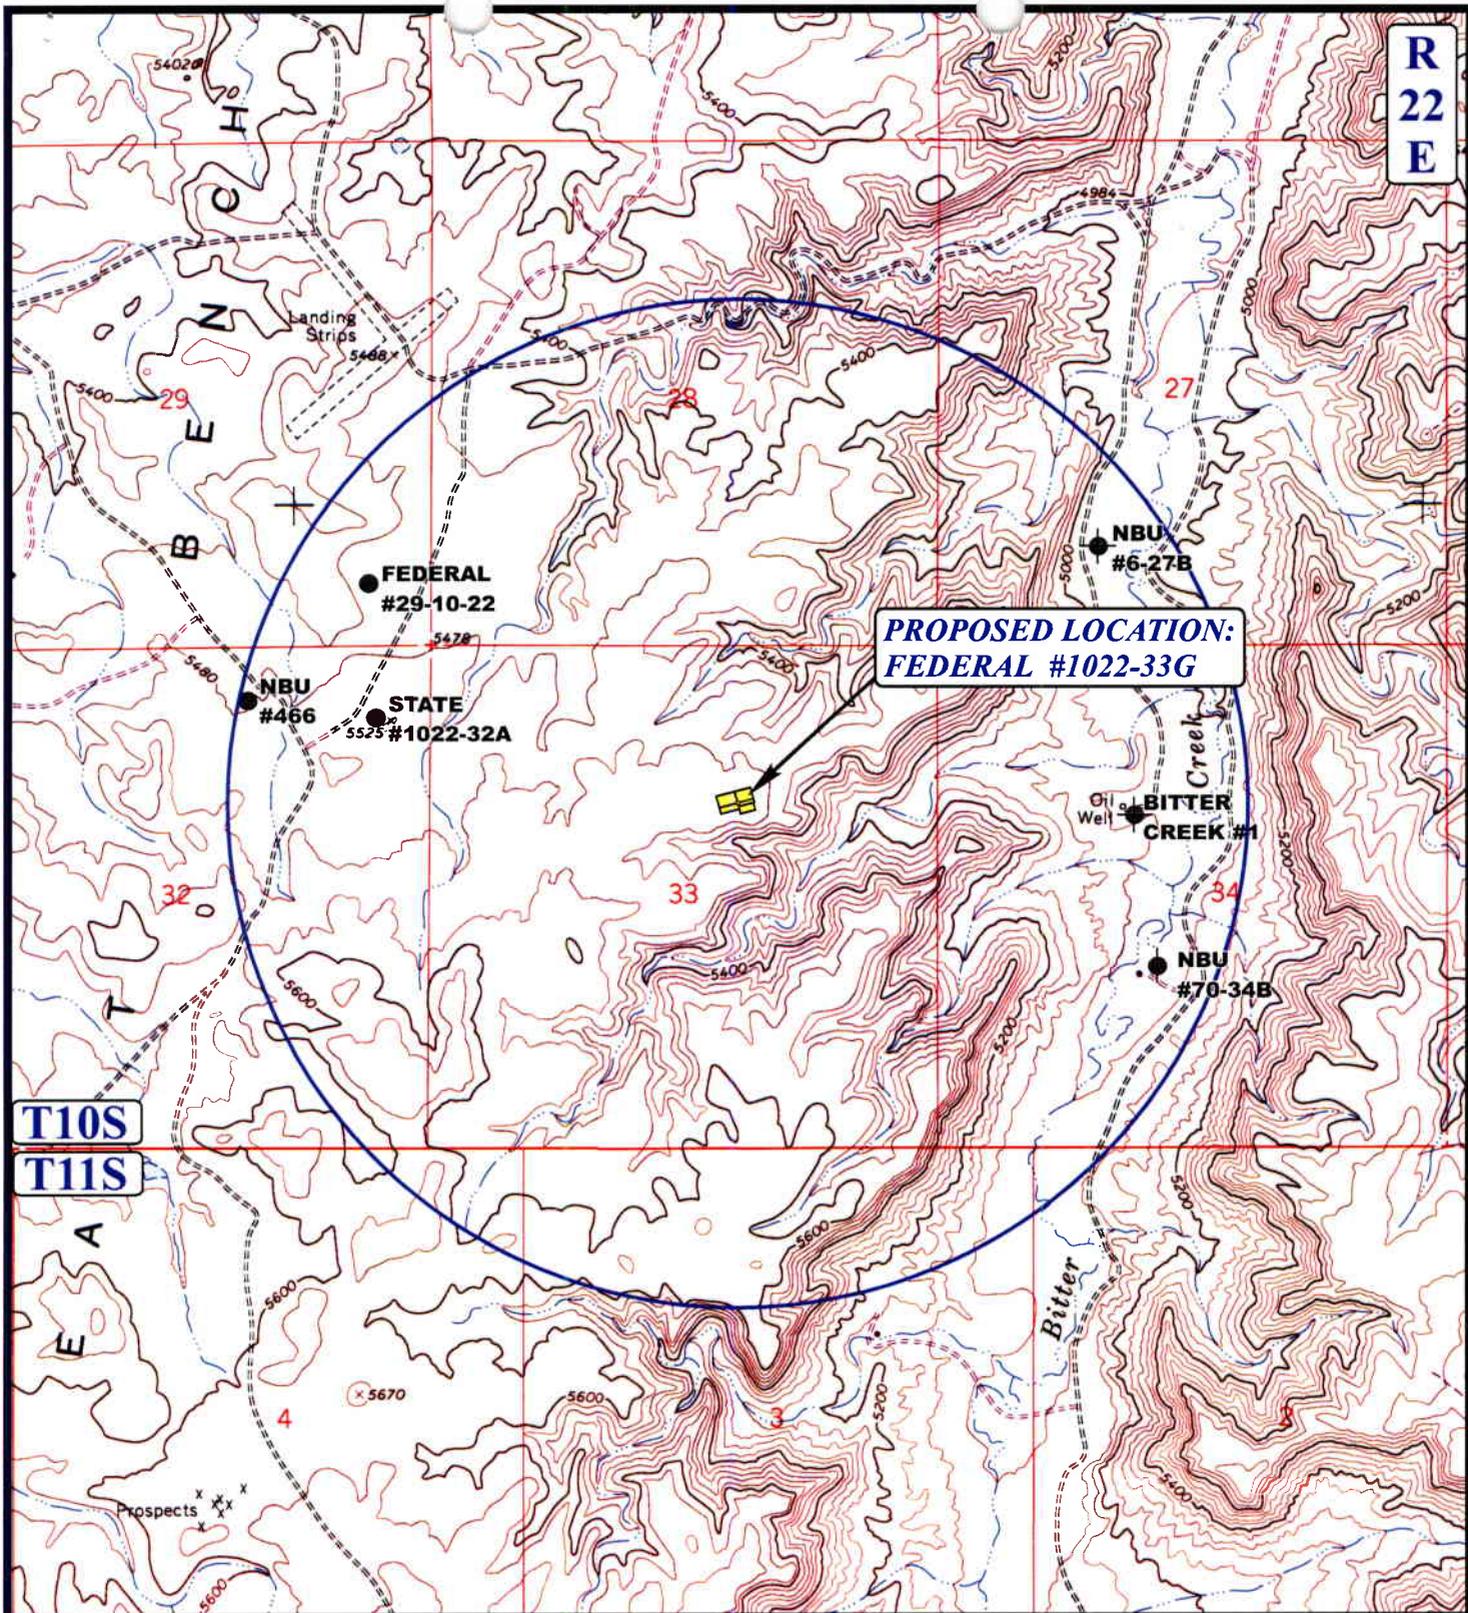

**PROPOSED LOCATION:
FEDERAL #1022-33G**

LEGEND:

- ∅ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ∅ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED

WESTPORT OIL AND GAS COMPANY, L.P.

**FEDERAL #1022-33G
SECTION 33, T10S, R22E, S.L.B.&M.
1650' FNL 2052' FEL**



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813




**TOPOGRAPHIC
MAP**

03 24 04
MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: T.H. REVISED: 00-00-00



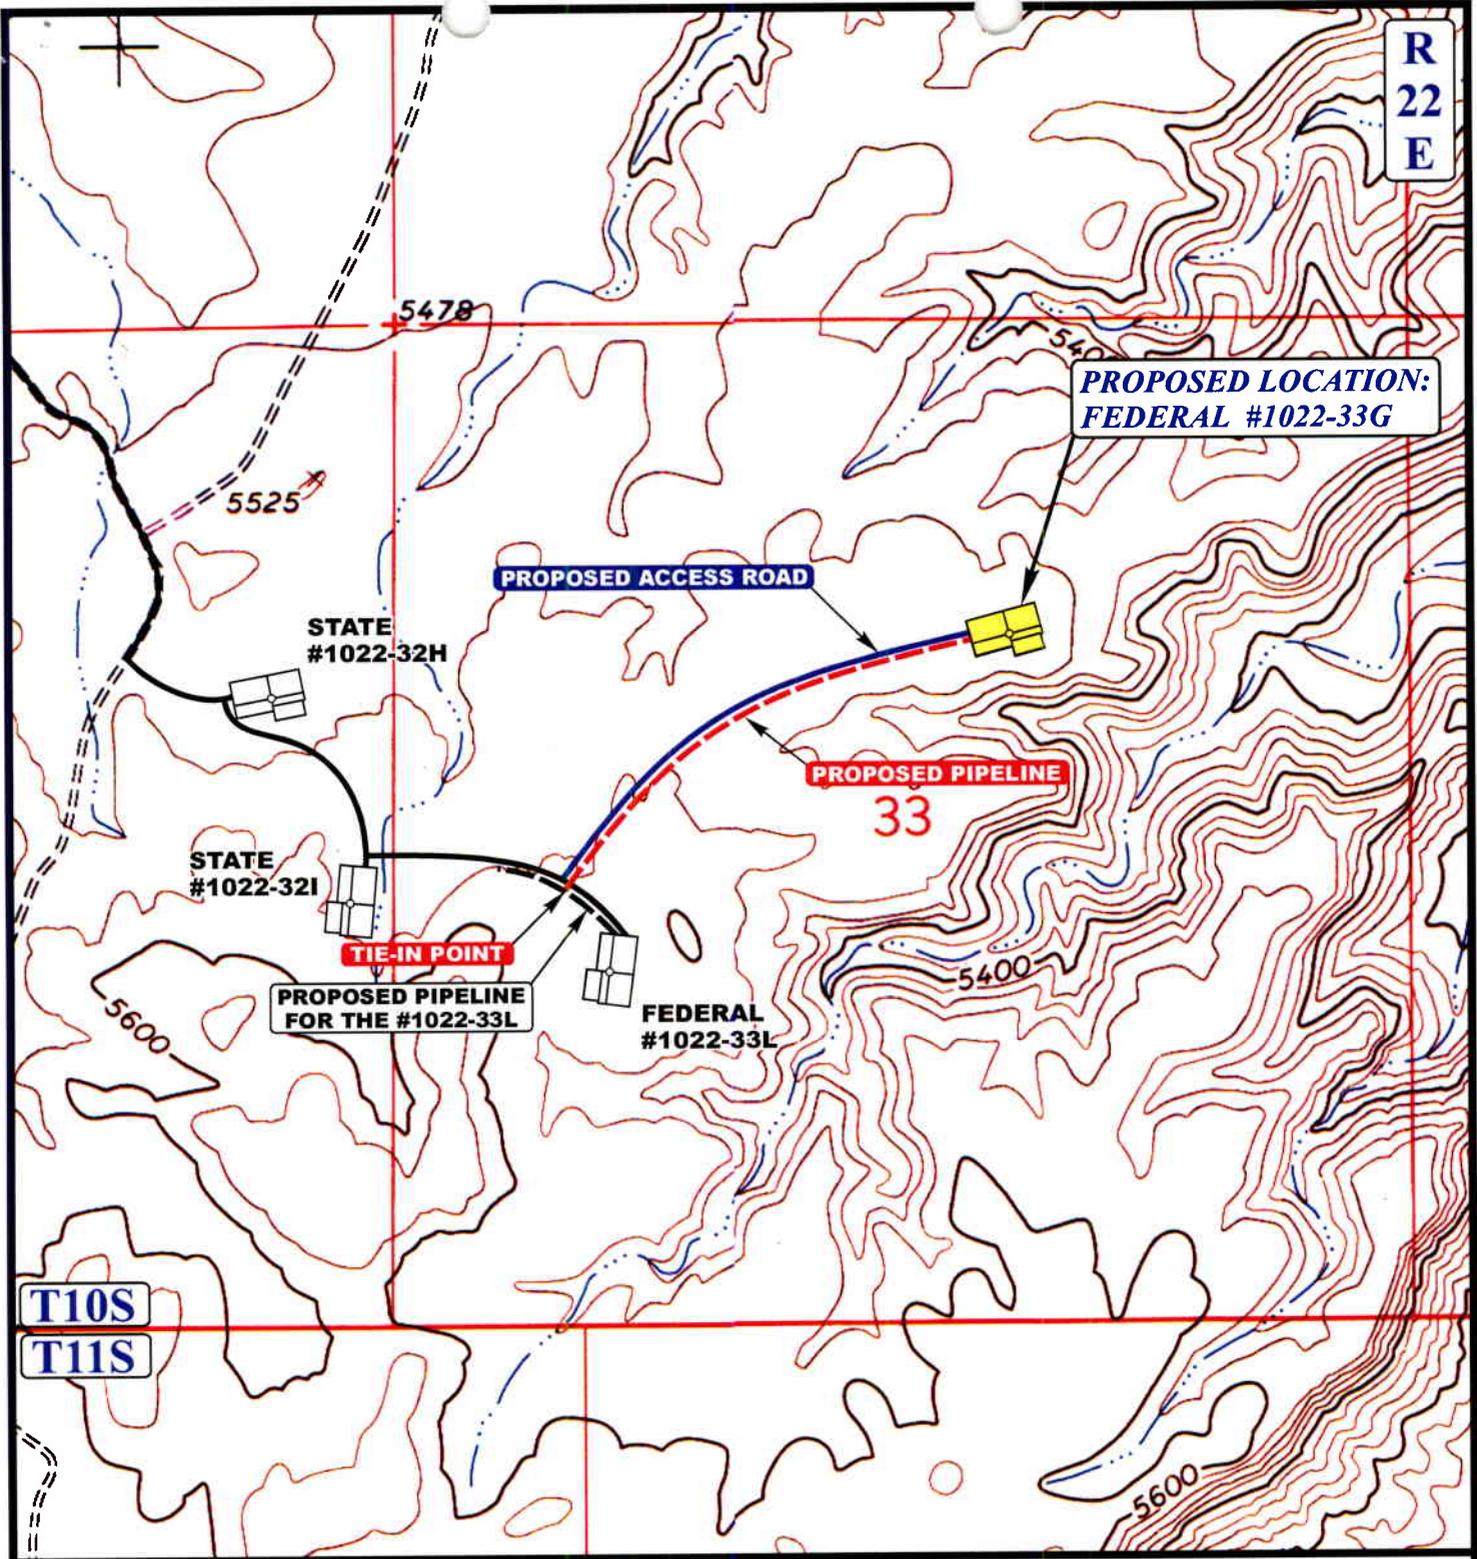

**PROPOSED LOCATION:
FEDERAL #1022-33G**

PROPOSED ACCESS ROAD

PROPOSED PIPELINE

33

TIE-IN POINT

**PROPOSED PIPELINE
FOR THE #1022-33L**

**FEDERAL
#1022-33L**

**STATE
#1022-32H**

**STATE
#1022-32I**

T10S

T11S

**R
22
E**

APPROXIMATE TOTAL PIPELINE DISTANCE = 2,600' +/-

LEGEND:

-  PROPOSED ACCESS ROAD
-  EXISTING PIPELINE
-  PROPOSED PIPELINE



WESTPORT OIL AND GAS COMPANY, L.P.

**FEDERAL #1022-33G
SECTION 33, T10S, R22E, S.L.B.&M.
1650' FNL 2052' FEL**



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**

03 24 04
MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: T.H. REV: 5-5-04 K.G.



WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 05/18/2004

API NO. ASSIGNED: 43-047-35742

WELL NAME: FEDERAL 1022-33G

OPERATOR: WESTPORT OIL & GAS CO (N2115)

CONTACT: RALEEN SEARLE

PHONE NUMBER: 435-781-7044

PROPOSED LOCATION:

SWNE 33 100S 220E
SURFACE: 1650 FNL 2052 FEL
BOTTOM: 1650 FNL 2052 FEL
UINTAH
NATURAL BUTTES (630)

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-037166

SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: MVRD

COALBED METHANE WELL? NO

INSPECT LOCATN BY: / /

Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LATITUDE: 39.90811

LONGITUDE: 109.44202

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. CO-1203)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 43-8496)
- RDCC Review (Y/N)
(Date:)
- Fee Surf Agreement (Y/N)


LOCATION AND SITING:

- R649-2-3.
Unit _____
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: _____
Eff Date: _____
Siting: _____
- R649-3-11. Directional Drill


COMMENTS: _____

STIPULATIONS: _____

1- Federal Approval
2- Spacing Slip
3- OIL SHALE

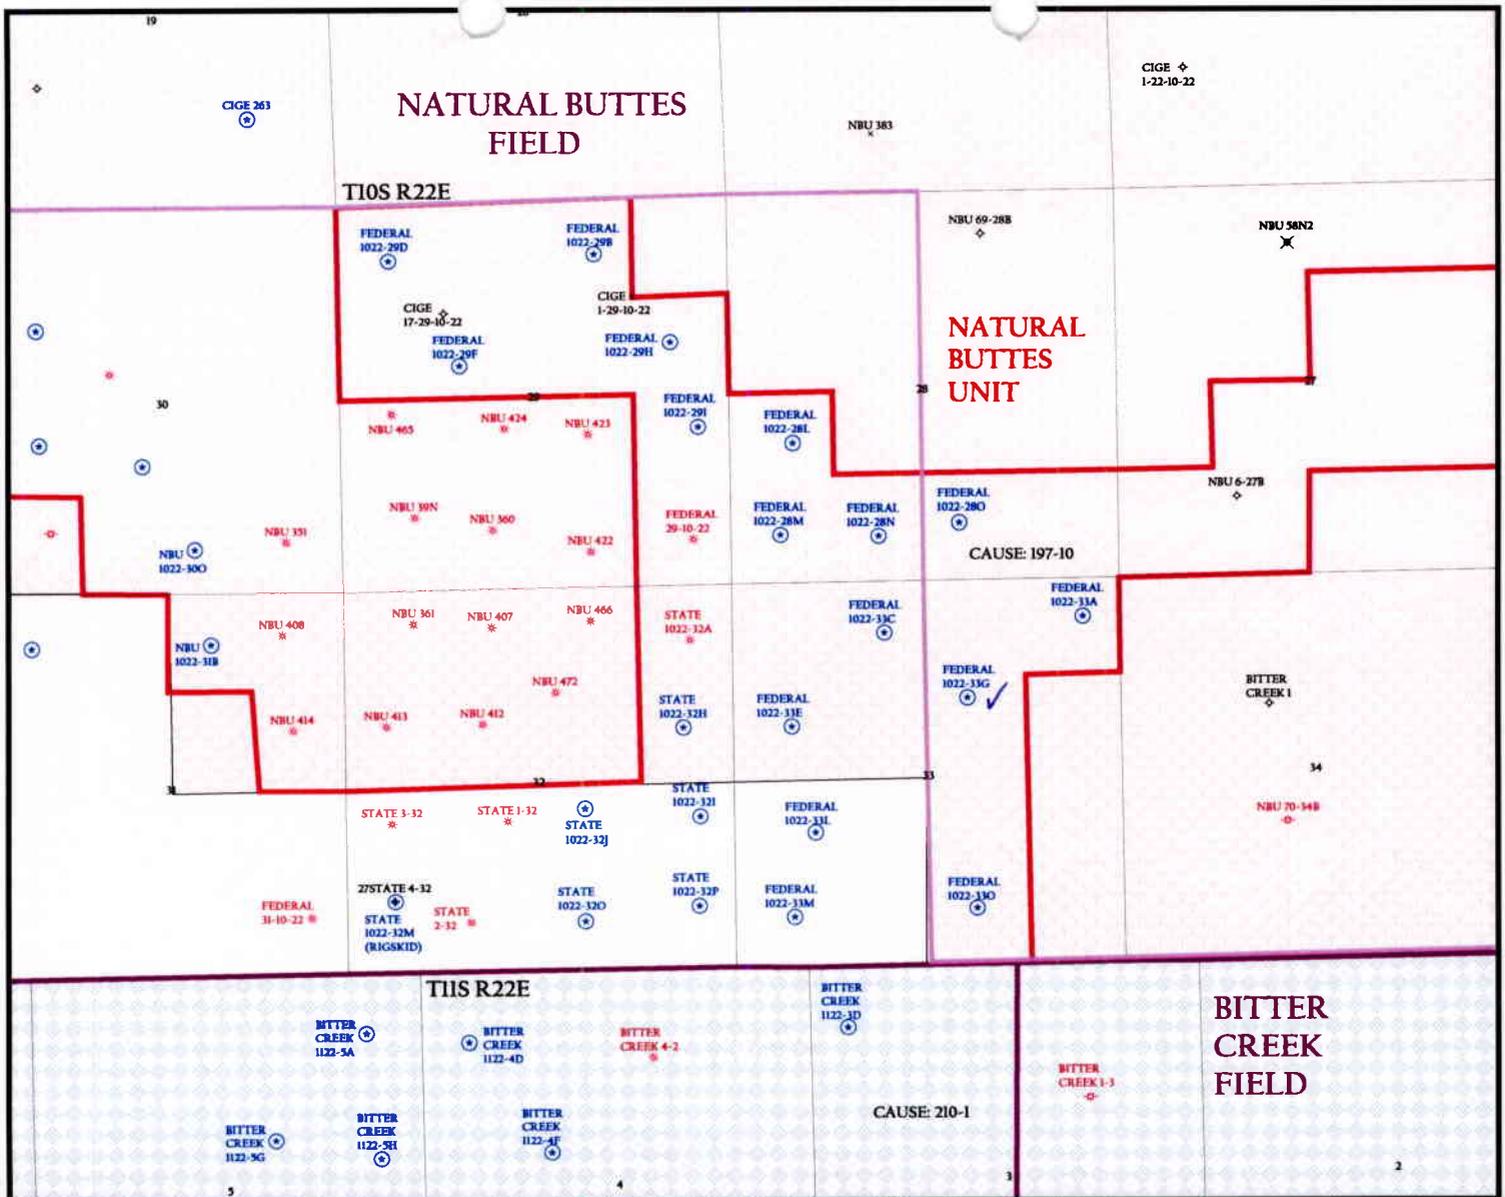

OPERATOR: WESTPORT O&G CO (N2115)
 SEC. 33 T.10S, R.22E
 FIELD: NATURAL BUTTES (630)
 COUNTY: Uintah
 CAUSE: R649-3-3 / EXCEPTION LOCATION

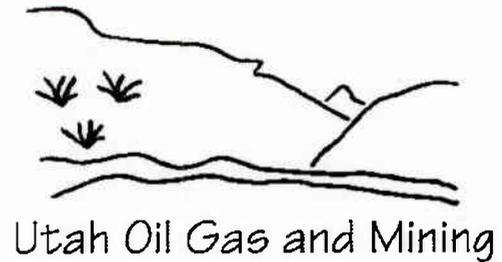

Well Status

- ⚡ GAS INJECTION
- ⊛ GAS STORAGE
- ✕ LOCATION ABANDONED
- ⊕ NEW LOCATION
- ⚡ PLUGGED & ABANDONED
- ★ PRODUCING GAS
- PRODUCING OIL
- ⊛ SHUT-IN GAS
- ⊛ SHUT-IN OIL
- ✕ TEMP. ABANDONED
- ⊕ TEST WELL
- ⊕ WATER INJECTION
- ⊕ WATER SUPPLY
- ⊕ WATER DISPOSAL

Unit Status

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED

Field Status

- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED



PREPARED BY: DIANA WHITNEY
 DATE: 19-MAY-2004



WESTPORT OIL AND GAS COMPANY, L.P.

1670 Broadway Suite 2800 Denver Colorado 80202
Telephone: 303 573 5404 Fax: 303 573 5609

May 19, 2004

Ms. Diana Whitney
Division of Oil, Gas and Mining
P.O. Box 145801
Salt Lake City, UT 84114-6100

RE: Exception Location
Federal 1022-33G
SW/4NE/4 (1,650' FNL, 2,052' FEL) Sec 33-T10S-R22E
Uintah County, Utah
Natural Buttes Prospect

Dear Ms. Whitney:

Westport Oil and Gas Company, L.P. has permitted to drill the captioned well to a depth of 8,500' to test the Wasatch and Mesaverde formations. The well is located at an exception location to State Rule 649-3-2. The well location was moved for topographic reasons. Westport owns 100% of the leasehold within 460 feet of the exception location and has no objection to the exception location.

Westport requests your approval of this exception location. If you have any questions, call me at 303-607-3445. Thank you for your assistance.

Sincerely,



Bruce E. Johnston
Land Manager
BEJ/251
cc Raleen Searle

RECEIVED

MAY 28 2004

DIV. OF OIL, GAS & MINING



State of Utah

Department of
Natural Resources

ROBERT L. MORGAN
Executive Director

Division of
Oil, Gas & Mining

LOWELL P. BRAXTON
Division Director

OLENE S. WALKER
Governor

GAYLE F. McKEACHNIE
Lieutenant Governor

June 1, 2004

Westport Oil & Gas Company
1368 S 1200 E
Vernal, UT 84078

Re: Federal 1022-33G Well, 1650' FNL, 2052' FEL, SW NE, Sec. 33, T. 10 South,
R. 22 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

Appropriate information has been submitted to DOGM and administrative approval of the requested exception location is hereby granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-35742.

Sincerely,

John R. Baza
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: Westport Oil & Gas Company
Well Name & Number Federal 1022-33G
API Number: 43-047-35742
Lease: UTU-037166

Location: SW NE **Sec.** 33 **T.** 10 South **R.** 22 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

Page 2

Conditions of Approval API # 43-047-35742

June 1, 2004

6. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

006

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU-037166
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator WESTPORT OIL AND GAS COMPANY		7. If Unit or CA Agreement, Name and No.
3a. Address 1368 SOUTH 1200 EAST VERNAL, UT 84078		8. Lease Name and Well No. FEDERAL 1022-33G
3b. Phone No. (include area code) Ph: 435.781.7044 Fx: 435.781.7094		9. API Well No. 43.047.35742
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SWNE 1650FNL 2052FEL 39.90817 N Lat, 109.44261 W Lon At proposed prod. zone		10. Field and Pool, or Exploratory NATURAL BUTTES
14. Distance in miles and direction from nearest town or post office* 54 +/- MILES FROM VERNAL, UT		11. Sec., T., R., M., or Blk. and Survey or Area Sec 33 T10S R22E Mer SLB SME: BLM
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1650' +/-		12. County or Parish UINTAH
16. No. of Acres in Lease 560.00		13. State UT
17. Spacing Unit dedicated to this well 40.00		18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. REFER TO TOPO C
19. Proposed Depth 8500 MD		20. BLM/BIA Bond No. on file CO-1203
21. Elevations (Show whether DF, KB, RT, GL, etc.) 5531 GL		22. Approximate date work will start
23. Estimated duration		

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature (Electronic Submission)	Name (Printed/Typed) RALEEN SEARLE	Date 05/14/2004
Title PREPARER	RECEIVED	
Approved by (Signature) 	Name (Printed/Typed) Assistant Field Manager	Date 01/24/2005
Title Assistant Field Manager Mineral Resources	Office DIV. OF OIL, GAS & MINING	

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

Electronic Submission #30723 verified by the BLM Well Information System
For WESTPORT OIL AND GAS COMPANY, sent to the Vernal
Committed to AFMSS for processing by LESLIE WALKER on 05/19/2004 ()

400610
NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED

** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED **

041B1357A

105 4/1/04

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Westport Oil & Gas Company, L.P.
Well Name & Number: FEDERAL 1022-33G
API Number: 43-047-35742
Lease Number: UTU - 037166
Location: SWNE Sec. 33 TWN: 10S RNG: 22E
Agreement: N/A

NOTIFICATION REQUIREMENTS

- Location Construction - At least forty-eight hours prior to construction of the location or access roads.
- Location Completion - Prior to moving on the drilling rig.
- Spud Notice - At least twenty-four (24) hours prior to spudding the well.
- Casing String and Cementing - At least twenty-four (24) hours prior to running casing and cementing all casing strings.
- BOP and Related Equipment Tests - At least twenty-four (24) hours prior to initiating pressure tests.
- First Production Notice - Within five (5) business days after new well begins, or production resumes after well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

CONDITIONS OF APPROVAL FOR NOTICE TO DRILL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

Submit an electronic copy of all logs run on this well in LAS format. This submission will replace the requirement for submittal of paper logs to the BLM.

A. DRILLING PROGRAM

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands encountered to John Mayers of this office prior to setting the next casing string or requesting plugging orders. Faxed copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a 3M system and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

If an air compressor is on location and is being utilized to provide air for the drilling medium while drilling, the special drilling requirements in Onshore Oil and Gas Order No. 2, regarding air or gas drilling shall be adhered to. If a mist system is being utilized then the requirement for a deduster shall be waived.

3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint.

As a minimum, the usable water and oil shale resources shall be isolated and/or protected by having a cement top for the production casing at least 200 ft. above the top of the Mahogany Oil Shale, identified at 1,736 ft. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

A cement bond log (CBL) will be run from the production casing shoe to the top of the cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

6. Notifications of Operations

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-5(d) shall be submitted to the appropriate Field Office within 60 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (1).

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries. Tests for meter accuracy will be conducted on initial meter installations and at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, please contact one of the following individuals:

Ed Forsman (435) 828-7874
Petroleum Engineer

Kirk Fleetwood (435) 828-7875
Petroleum Engineer

BLM FAX Machine (435) 781-4410

EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids.

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids.

CONDITIONS OF APPROVAL
For The Surface Use Program Of The
Application For Permit To Drill

Company/Operator:	Westport Oil and Gas	API Number:	43-047-35742
Well Name & Number:	1022-33G	Surface Ownership:	BLM
Lease Number:	UTU037166	Date NOS Received:	04/01/04
Location:	SWNE, Sec. 33, T10S, R22E	Date APD Received:	05/14/04

- If any paleontological or cultural materials are encountered, stop work immediately and report the find to this office.
- No construction or drilling may occur from May 15 through June 20 to protect pronghorn antelope kidding season.
- The seed mix for this location shall be:

Indian Ricegrass	<i>Achnatherum hymenoides</i>	4 lbs./acre
Shadscale	<i>Atriplex confertifolia</i>	3 lbs./acre
Black sage	<i>Artemisia nova</i>	1 lbs./acre
Needle & Threadgrass	<i>Hesperostipa comata ssp. comata</i>	4 lbs./acre

 - All pounds are in pure live seed.
 - Reseeding may be required if first seeding is not successful.
- 4 to 6 inches of topsoil should be stripped from the location and windrowed as shown on the cut sheet. The topsoil shall then be broadcast seeded with the recommended seed mix immediately after it has been windrowed and the seed walked into the soil with a dozer.
- The topsoil from the reserve pit should be stripped and piled separately near the reserve pit. When the reserve pit is closed, it shall be recontoured and the topsoil respread, and the area shall be seeded in the same manner as the location topsoil.
- Once the location is plugged and abandoned, it shall be recontoured to natural contours, topsoil respread where appropriate, and the entire location seeded with the recommended seed mix. Seeding should take place by broadcasting the seed and walking it into the soil with a dozer immediately after the dirt work is completed.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No. UTU-037166
6. If Indian, Allottee or Tribe Name
7. If Unit or CA/Agreement, Name and/or No.
8. Well Name and No. FEDERAL 1022-33G
9. API Well No. 43-047-35742
10. Field and Pool, or Exploratory Area NATURAL BUTTES
11. County or Parish, State UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other	
2. Name of Operator WESTPORT OIL & GAS COMPANY, L.P.	
3a. Address 1368 S. 1200 E., VERNAL, UT 84078	3b. Phone No. (include area code) 435-781-7044
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Section 33, T10S, R22E, SLB&M 1650' FNL, 2052 FEL, SWNE	

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	APD EXTENSION
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

Westport Oil & Gas Company, L.P. hereby requests an one year extension on the APD.

Approved by the
Utah Department of
Oil, Gas and Mining
Date: 06-27-05
B *[Signature]*

COPIES SENT TO OPERATOR
Date: 6-28-05
Initials: CH

14. I hereby certify that the foregoing is true and correct	
Name (Printed/Typed) Raleen Weddle	Title Regulatory Analyst
Signature <i>Raleen Weddle</i>	Date June 21, 2005

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

(Instructions on reverse)

JUN 23 2005

DEPT. OF OIL, GAS & MINING



**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304735742
Well Name: FEDERAL 1022-33G
Location: 1650' FNL, 2052' FEL, SWNE SEC. 33, T10S, R22E
Company Permit Issued to: WESTPORT OIL & GAS COMPANY, LP
Date Original Permit Issued: 6/1/2004

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

Raleen Weddle
Signature

6/21/2005
Date

Title: REGULATORY ANALYST

Representing: WESTPORT OIL & GAS COMPANY

RECEIVED

JUN 24 2005

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

RECEIVED
DEC 16 2005

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No. **UTU-037166**
6. If Indian, Allottee or Tribe Name
7. If Unit or CA/Agreement, Name and/or No.
8. Well Name and No. **FEDERAL 1022-33G**
9. API Well No. **43-047-35742**
10. Field and Pool, or Exploratory Area **NATURAL BUTTES**
11. County or Parish, State **UINTAH COUNTY, UTAH**

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other
2. Name of Operator **WESTPORT OIL & GAS COMPANY L.P.**
3a. Address **1368 SOUTH 1200 EAST VERNAL, UT 84078**
3b. Phone No. (include area code) **(435) 781-7024**
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) **SWNE SECTION 33-T10S-R22E 1650'FNL & 2052'FEL**

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other BLM APD EXTENSION
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

THE OPERATOR REQUESTS AUTHORIZATION FOR AN ONE YEAR EXTENSION FOR THE SUBJECT WELL LOCATION. SO THAT THE DRILLING OPERATIONS MAY BE COMPLETED. THE ORIGINAL APD WAS APPROVED BY THE BUREAU OF LAND MANAGEMENT ON JANUARY 24, 2005.

CONDITIONS OF APPROVAL ATTACHED

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) Sheila Upchego	Title Regulatory Analyst
Signature <i>Sheila Upchego</i>	Date December 15, 2005

THIS SPACE FOR FEDERAL OR STATE USE

Approved by <i>Mark Baker</i>	Title Petroleum Engineer	Date DEC 21 2005
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

JAN 6 2006



CONDITIONS OF APPROVAL

Westport Oil & Gas Co.

Notice of Intent APD Extension

Lease: UTU-037166
Well: NBU 1022-33G
Location: SWNE Sec 33-T10S-R22E

An extension for the referenced APD is granted with the following conditions:

1. The extension and APD shall expire on 1/24/07
2. No other extension shall be granted.

If you have any other questions concerning this matter, please contact Matt Baker of this office at (435) 781-4490

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU-037166

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
FEDERAL 1022-33G

9. API Well No.
4304735742

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH, UTAH

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
KERR-MCGEE OIL & GAS ONSHORE LP

3a. Address
1368 SOUTH 1200 EAST, VERNAL, UTAH 84078

3b. Phone No. (include area code)
435-781-7003

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
**1650' FNL 2052' FEL
SWNE SEC 33T-10S-R22E**

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Deepen
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Fracture Treat
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Plug and Abandon
	<input type="checkbox"/> Plug Back
	<input type="checkbox"/> Production (Start/Resume)
	<input type="checkbox"/> Reclamation
	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Water Disposal
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Well Integrity
	<input checked="" type="checkbox"/> Other APD EXTENSION
	DOGM

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

THE OPERATOR REQUESTS AUTHORIZATION FOR AN ONE YEAR EXTENSION FOR THE SUBJECT WELL LOCATION SO THAT THE DRILLING OPERATIONS MAY BE COMPLETED. THE ORIGINAL APD WAS APPROVED BY THE DIVISION OF OIL, GAS AND MINING ON JUNE 1, 2004.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: **05-19-06**
By: *[Signature]*

**RECEIVED
MAY 15 2006**

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) Ramey Hoopes	Title Regulatory Clerk
Signature <i>Ramey Hoopes</i>	Date May 10, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RESE

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304735742
Well Name: FEDERAL 1022-33G
Location: SWNE, SEC 33-T10S-R22E
Company Permit Issued to: KERR MCGEE OIL AND GAS ONSHORE LP
Date Original Permit Issued: 6/1/2004

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

Ramey Hoopes
Signature

5/10/2006
Date

Title: REGULATORY CLERK

Representing: KERR MCGEE OIL AND GAS ONSHORE L

RECEIVED
MAY 15 2006
DIV. OF OIL, GAS & MINING

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING
1. DJJ
2. CDW

X Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

1/6/2006

FROM: (Old Operator):
 N2115-Westport Oil & Gas Co., LP
 1368 South 1200 East
 Vernal, UT 84078
 Phone: 1-(435) 781-7024

TO: (New Operator):
 N2995-Kerr-McGee Oil & Gas Onshore, LP
 1368 South 1200 East
 Vernal, UT 84078
 Phone: 1-(435) 781-7024

WELL NAME	CA No.	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
-----------	--------	-----	-----	-----	--------	-----------	------------	-----------	-------------

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 5/10/2006
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 5/10/2006
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- If **NO**, the operator was contacted on: _____
- (R649-9-2)Waste Management Plan has been received on: IN PLACE
- Inspections of LA PA state/fee well sites complete on: n/a
- Reports current for Production/Disposition & Sundries on: ok
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 3/27/2006 BIA not yet
- Federal and Indian Units:**
 The BLM or BIA has approved the successor of unit operator for wells listed on: 3/27/2006
- Federal and Indian Communization Agreements ("CA"):**
 The BLM or BIA has approved the operator for all wells listed within a CA on: n/a
- Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: _____

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 5/15/2006
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 5/15/2006
- Bond information entered in RBDMS on: 5/15/2006
- Fee/State wells attached to bond in RBDMS on: 5/16/2006
- Injection Projects to new operator in RBDMS on: _____
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a Name Change Only

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: CO1203
- Indian well(s) covered by Bond Number: RLB0005239
- (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0005236
- The **FORMER** operator has requested a release of liability from their bond on: n/a rider added KMG
 The Division sent response by letter on: _____

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 5/16/2006

COMMENTS:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

8. Well Name and No.
MUTIPLE WELLS

2. Name of Operator
KERR-McGEE OIL & GAS ONSHORE LP

9. API Well No.

3a. Address **1368 SOUTH 1200 EAST VERNAL, UT 84078**
3b. Phone No. (include area code) **(435) 781-7024**

10. Field and Pool, or Exploratory Area

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEE ATTACHED

11. County or Parish, State
UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomplate in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

PLEASE BE ADVISED THAT KERR-McGEE OIL & GAS ONSHORE LP, IS CONSIDERED TO BE THE OPERATOR OF THE ATTACHED WELL LOCATIONS. EFFECTIVE JANUARY 6, 2006.
KERR-McGEE OIL & GAS ONSHORE LP, IS RESPONSIBLE UNDER TERMS AND CONDITIONS OF THE LEASE(S) FOR THE OPERATIONS CONDUCTED UPON LEASE LANDS. BOND COVERAGE IS PROVIDED BY STATE OF UTAH NATIONWIDE BOND NO. RLB0005237.

RECEIVED

MAY 10 2006

DIV. OF OIL, GAS & MINING

*BLM BOND = C01203
BIA BOND = RLB0005239*

APPROVED 5116106

Earlene Russell

**Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician**

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)
RANDY BAYNE
Signature
Randy Bayne

Title
DRILLING MANAGER
Date
May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Office _____

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

5. Lease Serial No.
MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State
UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY L.P.

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEE ATTACHED

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Deepen
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Fracture Treat
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Plug and Abandon
	<input type="checkbox"/> Convert to Injection
	<input type="checkbox"/> Plug Back
	<input type="checkbox"/> Production (Start/Resume)
	<input type="checkbox"/> Reclamation
	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Water Disposal
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Well Integrity
	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

EFFECTIVE JANUARY 6, 2006, WESTPORT OIL & GAS COMPANY L.P., HAS RELINQUISHED THE OPERATORSHIP OF THE ATTACHED WELL LOCATIONS TO KERR-McGEE OIL & GAS ONSHORE LP.

APPROVED 5/16/06
Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

RECEIVED
MAY 10 2006

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) BRAD LANEY	Title ENGINEERING SPECIALIST
Signature	Date May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by <i>Brad Laney</i>	Title	Date 5-9-06
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT
Colorado State Office
2850 Youngfield Street
Lakewood, Colorado 80215-7076

IN REPLY REFER TO:

CO922 (MM)
3106
COC017387 et. al.

March 23, 2006

NOTICE

Kerr-McGee Oil & Gas Onshore L.P. :
1999 Broadway, Suite 3700 : Oil & Gas
Denver, CO 80202 :

Merger/Name Change - Recognized

On February 28, 2006 this office received acceptable evidence of the following mergers and name conversion:

Kerr-McGee Oil & Gas Onshore L.P., a Delaware Limited Partnership, and Kerr-McGee Oil & Gas Onshore LLC, a Delaware Limited Partnership merger with and into Westport Oil and Gas Company L.P., a Delaware Limited Partnership, and subsequent Westport Oil & Gas Company L.P. name conversion to Kerr-McGee Oil & Gas Onshore L.P.

For our purposes the merger and name conversion was effective January 4, 2006, the date the Secretary of State of Delaware authenticated the mergers and name conversion.

Kerr-McGee Oil & Gas Onshore L.P. provided a list of oil and gas leases held by the merging parties with the request that the Bureau of Land Management change all their lease records from the named entities to the new entity, Kerr-McGee Oil & Gas Onshore L.P. In response to this request each state is asked to retrieve their own list of leases in the names of these entities from the Bureau of Land Management's (BLM) automated LR2000 data base.

The oil and gas lease files identified on the list provided by Kerr-McGee Oil & Gas Onshore L.P. have been updated as to the merger and name conversion. We have not abstracted the lease files to determine if the entities affected by the acceptance of these documents holds an interest in the lease, nor have we attempt to identify leases where the entity is the operator on the ground that maintains vested record title or operating rights interests. If additional documentation, for change of operator, is required you will be contacted directly by the appropriate Field Office. The Mineral Management Services (MMS) and other applicable BLM offices were notified of the merger with a copy of this notice

Please contact this office if you identify additional leases where the merging party maintains an interest, under our jurisdiction, and we will document the case files with a copy of this notice. If the leases are under the jurisdiction of another State Office that information will be forwarded to them for their action.

Three riders accompanied the merger/name conversion documents which will add Kerr-McGee Oil and Gas Onshore LLC as a principal to the 3 Kerr-McGee bonds maintained by the Wyoming State Office. These riders will be forward to them for their acceptance.

The Nationwide Oil & Gas Continental Casualty Company Bond #158626364 (BLM Bond #CO1203), maintained by the Colorado State Office, will remain in full force and effect until an assumption rider is accepted by the Wyoming State Office that conditions their Nationwide Safeco bond to accept all outstanding liability on the oil and gas leases attached to the Colorado bond.

If you have questions about this action you may call me at 303.239.3768.

/s/Martha L. Maxwell
Martha L. Maxwell
Land Law Examiner
Fluid Minerals Adjudication

Attachment:

List of OG Leases to each of the following offices:

MMS MRM, MS 357B-1

WY, UT, NM/OK/TX, MT/ND, WY State Offices

CO Field Offices

Wyoming State Office

Rider #1 to Bond WY2357

Rider #2 to Bond WY1865

Rider #3 to Bond WY1127



United States Department of the Interior



BUREAU OF LAND MANAGEMENT
Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155
<http://www.blm.gov>

IN REPLY REFER TO:
3106
(UT-922)

March 27, 2006

Memorandum

To: Vernal Field Office

From: Chief, Branch of Fluid Minerals

Subject: Merger Approval

Attached is an approved copy of the merger recognized by the Bureau of Land Management, Colorado State Office. We have updated our records to reflect the merger from Westport Oil and Gas Company L.P. into Kerr-McGee Onshore Oil and Gas Company. The merger was approved effective January 4, 2006.

Chief, Branch of
Fluid Minerals

Enclosure

Approval letter from BLM COSO (2 pp)

cc: MMS, Reference Data Branch, James Sykes, PO Box 25165, Denver CO 80225
State of Utah, DOGM, Attn: Earlene Russell, PO Box 145801, SLC UT 84114
Teresa Thompson
Joe Incardine
Connie Seare
Dave Mascarenas
Susan Bauman

RECEIVED

MAR 28 2006

CH. OF OIL, GAS & MIN. B.

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

Name of Company: KERR-MCGEE OIL & GAS ONSHORE LP

Well Name: FEDERAL 1022-33G

Api No: 43-047-35742 Lease Type: FEDERAL

Section 33 Township 10S Range 22E County UINTAH

Drilling Contractor PETE MARTINS RIG # BUCKET

SPUDDED:

Date 6/04/06

Time 11:30 PM

How DRY

Drilling will Commence: _____

Reported by LOU WELDON

Telephone # (435) 828-7035

Date 06/06/2006 Signed CHD

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: KERR MCGEE OIL & GAS ONSHORE LP Operator Account Number: N 2995
 Address: 1368 SOUTH 1200 EAST
 city VERNAL
 state UT zip 84078 Phone Number: (435) 781-7024

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304735742	FEDERAL 1022-33G		SWNE	33	10S	22E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
<i>C</i> <u>A</u>	99999	<u>15404</u>	6/4/2006		<u>6/8/06</u>		
Comments: <u>MIRU PETE MARTIN BUCKET RIG. <i>mvrD</i></u> <u>SPUD WELL LOCATION ON 06/04/2006 AT 11:30 AM.</u> <u>-K</u>							

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
Comments:							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
Comments:							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

SHEILA UPCHEGO

Name (Please Print) *Sheila Upchego*
 Signature *Sheila Upchego*
 REGULATORY ANALYST 6/5/2006
 Title Date

To EARLENE RUSSELL From SHEILA UPCHEGO
 (6/2000) Co./Dept. UTDGM Co. KMG
 Phone # (801) 534-5380 Phone # (435) 781-7024
 Fax # (801) 369-3940 Fax # (435) 781-7094

JUN 05 2006

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

UTU-037166

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

FEDERAL 1022-33G

9. API Well No.

4304735742

10. Field and Pool, or Exploratory Area

NATURAL BUTTES

11. County or Parish, State

UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

KERR-McGEE OIL & GAS ONSHORE LP

3a. Address

1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SWNE SECTION 33, T10S, R22E 1650'FNL, 2052'FEL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>WELL SPUD</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

MIRU PETE MARTIN BUCKET RIG. DRILLED 20" CONDUCTOR HOLE TO 40'. RAN 14" 36.7# SCHEDULE 10 PIPE. CMT W/28 SX READY MIX.

SPUD WELL LOCATION ON 06/04/2006 AT 11:30 AM.

RECEIVED
JUN 12 2006

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

Sheila Upchego

Signature

Title

Regulatory Analyst

Date

June 5, 2006

DIV. OF OIL, GAS & MINING

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU-037166

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
FEDERAL 1022-33G

9. API Well No.
4304735742

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
KERR-McGEE OIL & GAS ONSHORE LP

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SWNE SECTION 33, T10S, R22E 1650'FNL, 2052'FEL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other SET SURFACE
			CSG

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

MIRU BILL MARTIN AIR RIG ON 06/06/2006. DRILLED 12 1/4" SURFACE HOLE TO 1750'. RAN 9 5/8" 32.3# H-40 SURFACE CSG. RAN 200' OF 1" PIPE. LEAD CMT W/140 SX HIFILL CLASS G @11.0 PPG 3.82 YIELD, TAILED CMT W/200 SX PREM CLASS G @15.8 PPG 1.15 YIELD 17 BBLS LEAD CMT TO PIT. TOP OUT W/100 SX CLASS G @15.8 PPG CMT TO SURFACE HOLE STAYED FULL.

WORT

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)
Sheila Upchego

Title
Regulatory Analyst

Signature

Date
June 8, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

JUN 12 2006

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU-037166

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
FEDERAL 1022-33G

9. API Well No.
4304735742

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
KERR-McGEE OIL & GAS ONSHORE LP

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SWNE SECTION 33, T10S, R22E 1650'FNL, 2052'FEL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other FINAL DRILLING OPERATIONS

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

FINISHED DRILLING FROM 1750' TO 8419' ON 08/21/2006. RAN 4 1/2" 11.6# I-80 PRODUCTION CSG. LEAD CMT W/341 SX PREM LITE II @11.0 PPG 3.38 YIELD. TAILED CMT W/1270 SX 50/50 POZ @14.3 PPG 1.31 YIELD. DROP PLUG AND DISPLACED W/130 BBLs WATER W/CLAYTREAT & MAGNACIDE. BUMP PLUG 500 PSI OVER @3000 PSI RELEASED PSI FE HELD WASH STACK ND BOP SET SLIPS W/85K MAKE ROUGH CUT ON 4 1/2" CSG. CLEAN MUD TANKS.

RELEASED ENSIGN RIG 81 ON 08/22/2006 AT 1500 HRS.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) Sheila Upchego	Title Regulatory Analyst
Signature 	Date August 23, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED
AUG 28 2006
DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU-037166

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
FEDERAL 1022-33G

9. API Well No.
4304735742

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH, UT

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
KERR MCGEE OIL AND GAS ONSHORE LP

3a. Address
1368 SOUTH 1200 EAST, VERNAL, UT 84078

3b. Phone No. (include area code)
435-781-7003

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
**SWNE, SEC 33-T10S-R22E
1650' FNL 2052' FEL**

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other PRODUCTION START UP
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

THE SUBJECT WELL LOCATION WAS PLACED ON PRODUCTION ON 9/3/06 AT 1:30 PM.

PLEASE REFER TO THE ATTACHED CHRONOLOGICAL WELL HISTORY.

RECEIVED
SEP 15 2006
DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) **RAMEY HOOPES** Title **REGULATORY CLERK**

Signature *Ramey Hoopes* Date **September 5, 2006**

THIS SPACE FOR FEDERAL OR STATE USE

Approved by _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Office _____

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

KERR MCGEE OIL AND GAS ONSHORE LP

CHRONOLOGICAL HISTORY

FEDERAL 1022-33G

UINTAH COUNTY, UT

	SPUD	Surface Casing	Activity	Status
	05/14/06		Build Location, 10% complete	Caza 81
	05/15/06		Build Location, 20% complete	Caza 81
	05/16/06		Build Location, 30% complete	Caza 81
	05/17/06		Build Location, 40% complete	Caza 81
	05/18/06		Build Location, 50% complete	Caza 81
	05/22/06		Build Location, 50% complete	Caza 81
	05/23/06		Build Location, 50% complete	Caza 81
	05/24/06		Build Location, 50% complete	Caza 81
	05/26/06		Build Location, 70% complete	Caza 81
	05/30/06		Build Location, 80% complete	Caza 81
	05/31/06		Build Location, 90% complete	Caza 81
	06/01/06		Build Location, 90% complete	Caza 81
	06/02/06		Build Location, 95% complete	Caza 81
	06/05/06		Build Location, 100% complete	Caza 81
	06/08/06	6/4/06	Set conductor,	Caza 81
		6/6/06	9 5/8" @ 1727' WORT	
	06/19/06	6/6/06	9 5/8" @ 1727' Ring In, WORT	Caza 81
	08/10/06	TD: 1750'	Csg. 9 5/8" @ 1742' MW: 8.4 SD: 8/XX/06 DSS: 0	
		Move to Federal 1022-33G.	Spot rig and RURT. Will raise derrick at daylight.	
	08/11/06	TD: 1750'	Csg. 9 5/8" @ 1742' MW: 8.4 SD: 8/XX/06 DSS: 0	
		Finish RURT. NU and test BOPE. PU BHA. Dropped collar clamp bolt in hole. POOH @	report time.	

08/14/06 TD: 4260' Csg. 9 5/8" @ 1742' MW: 8.4 SD: 8/11/06 DSS: 3
FOOH. PU magnet and TIH to 1750'. POOH and recovered collar clamp bolt. PU dropping bit, MM and TIH. Drill FE. Drill from 1750'-4054'. TFNB. Drill to 4260'. Penetration rate fell off. POOH and change bits. TIH @ report time.

08/15/06 TD: 5050' Csg. 9 5/8" @ 1742' MW: 9.5 SD: 8/11/06 DSS: 4
FIH. Drill from 4260'-5050'. DA @ report time.

08/16/06 TD: 5580' Csg. 9 5/8" @ 1742' MW: 9.6 SD: 8/11/06 DSS: 5
Drill from 5050'-5122'. Trip for dropping bit. Drill to 5580'. DA @ report time

08/17/06 TD: 6215' Csg. 9 5/8" @ 1742' MW: 9.8 SD: 8/11/06 DSS: 6
Drill from 5580'-6215'. DA @ report time.

08/18/06 TD: 6815' Csg. 9 5/8" @ 1742' MW: 10.0 SD: 8/11/06 DSS: 7
Drill from 6215'-6238'. TFNB. Drill to 6815'. DA @ report time.

08/21/06 TD: 8419' Csg. 9 5/8" @ 1742' MW: 11.1 SD: 8/11/06 DSS: 10
Drill from 6815'-7990'. TFNB. Drill to 8419'. CCH and short trip 20 stands. Circ BU. LDDP @ report time.

08/22/06 TD: 8419' Csg. 9 5/8" @ 1742' MW: 11.1 SD: 8/11/06 DSS: 11
Finish LDDS. RU and run logs to TD. Run 4.5" prod csg. Prep to CCH for cmt @ report time.

08/23/06 TD: 8419' Csg. 9 5/8" @ 1742' MW: 11.1 SD: 8/11/06 DSS: 12
CCH and cmt 4.5" prod csg. Set slips, NDBOP, cut csg, and clean pits. Release rig @ 1500 hrs on 8/22/06. Moving to Federal 1022-33C @ report time.

08/28/06 PROG: 7:AM HSM . MOVE IN RU RIG . SPOT EQUIP . ND WELLHEAD , NU BOP . PU 37/8 " MILL . RIH PU 2 3/8" TBG . GOT TO 7000' . POOH W/ 23/8 TBG & MILL . SWI . 6:PM

08/29/06 PROG: 7:AM HSM. OPEN WELL. ND BOP. NU FRAC VALVES. RU CUTTERS & RUN CBL. TAG @ 8298'. LOG WELL TO SURFACE. FILL WELL. RU B&C QUICK TEST & PRES TEST TO 7500 PSI. RIH & PERF 8021-25 , 8176-81 , 4SPF , 36 HOLES. SWI 2:PM

08/30/06 PROG: 08/30/06 7:AM HSM . RU BJ & CUTTERS . STAGE 1# . PERFS 8021-8181 . BROKE @ 3690 , IR 35.9 , IP 4480 , ISIP 2600 , FG .75 , MP 4989 , MR 44.5 , AP 4366 , AR 44.4 , FG .79 , ISIP 2900 , NPI 300 . CLEAN 567 BBLS , SAND 39,300# 20# GEL STAGE 2# . SET CBP @ 7883 , PERF 7563-66 , 7690-94 , 7848-53 , 4SPF , 48 HOLES , BROKE @ 4496 , IR 45.6 , IP 5150 , ISIP 2350 , FG .73 , MP 5533 , MR 49.8 , AP 5149 , AR 49.5 , FG .76 , ISIP 2550 , NPI 200 , CLEAN 2613 BBLS , SAND 338,647# , 20# GEL STAGE 3# SET CBP @ 7072 , PERF 6781-83 , 6829-31 , 6959-62 , 7038-42 , 4SPF , 44 HOLES , BROKE @ 1995 , IR 50.6 , IP 4280 , ISIP 2150 , FG .74 , MP 4450 , MR 50.5 , AP 4235 , AR 50.4 , FG .78 , ISIP 2450 , NPI 300 , CLEAN 2542 BBLS , SAND 337,800# , 18# GEL STAGE 4# SET CBP @ 6629 , PERF 6501-05 , 6595-99 , 4SPF 32 HOLES . SWI 7:PM

08/31/06 7:AM . HSM .STAGE 4# PERFS 6501-6599 . BROKE @ 2729 , IR 45.9 , IP 4747 , ISIP 2550 , FG .82 ,MP 4769 , MR 50.5 , AP 4590 , AR 50.3 , FG .89 , ISIP 3050 , NPI 500 , CLEAN 611 BBLS , SAND 68,750# , 18# GEL STAGE 5# SET CBP @ 6364' , PERF 6328-34 , 4SPF , 24 HOLES . BROKE @ 2253 , IR 35.8 , IP 4200 , ISIP 2350 , FG .80 , MP 4023 , MR 35.2 , AP 3742 , AR 35.1 , FG .86 , ISIP 2750 , NPI 400 , CLEAN 605 BBLS # , SAND 71,150# . 18# GEL . STAGE 6# SET CBP @ 5633' , PERF 5598-03 , 4SPF , 20 HOLES , BROKE @ 1407 , IR 24.5 , IP 2800 , ISIP 1900 , FG .77 , MP 2763 , MR 25.5 , AP 2600 , AR 25.4 , FG .82 , ISIP 2200 , NPI 300 , CLEAN 623 BBLS , SAND 77,215# , 18# GEL . TOTALS = 932,862# SAND, 7,561

BBLs CLEAN . 584 GAL DVE . SET CBP @ 5530' . RD CUTTERS & BJ . ND FRAC VALVES . NU BOP . PU 37/8" BIT , POBS , R-NIPPLE . RIH W/ 23/8" TBG . TAG @ 5530 . RU DRILL EQUIP . BROKE CONV CIR . DRILL UP CBP . 100 PSI INC . RIH , TAG @ 5603' . DRILL DOWN TO 2# CBP @ 5633' . DRILL UP CBP . 150 PSI INC . CIR CLEAN . PU TO 5500 SWI . 5:PM

09/1/06

PROG: 7:AM HSM. RIH TAG @ 6600', 29' SAND.
DRILL DOWN TO 3# CBP @ 6629'. DRILL UP CBP, 200 PSI INC. RIH, TAG @ 7042', 30' SAND.
DRILL DOWN TO 4# CBP @ 7072'. DRILL UP CBP, 200 PSI INC. RIH, TAG @ 7853', 30' SAND.
DRILL DOWN TO 5# CBP @ 7883'. DRILL UP CBP, 200 PSI INC. RIH, TAG @ 8200.
CLEANOUT TO PBTB @ 8350'. CIR WELL CLEAN. POOH LD EXCESS TBG. LAND WELL. EOT @ 7267'. ND BOP, NU WELLHEAD. DROP BALL POBS. PUT WELL FLOWING TO PIT. TURN WELL OVER TO FLOWTESTERS. 5 PM. RD RIG.

PROG: 9/4/06 WELL ON FLOWBACK, FLOWBACK REPORT: CP: 1575#, TP: 825#, 22/64 CHK, 25 BWPH, 24 HRS, SD: CLEAN, TTL BBLs FLWD: 600 BBLs, TODAY'S LTR: 1440 BBLs, LOAD REC TODAY: 600 BBLs, REMAINING LTR: 840 BBLs, TOTAL LOAD REC TO DATE: 6265 BBLs.

PROG: 9/3/06 WELL ON FLOWBACK, FLOWBACK REPORT: CP: 1700#, TP: 850#, 22/64 CHK, 30 BWPH, 24 HRS, SD: TRACE, TTL BBLs FLWD: 720 BBLs, TODAY'S LTR: 2160 BBLs, LOAD REC TODAY: 720 BBLs, REMAINING LTR: 1440 BBLs, TOTAL LOAD REC TO DATE: 5665 BBLs.

PROG: 9/2/06 WELL ON FLOWBACK, FLOWBACK REPORT: CP: 1850#, TP: 750#, 22/64 CHK, 35 BWPH, 24 HRS, SD: LIGHT, TTL BBLs FLWD: 1155 BBLs, TODAY'S LTR: 3315 BBLs, LOAD REC TODAY: 1155 BBLs, REMAINING LTR: 2160 BBLs, TOTAL LOAD REC TO DATE: 4945 BBLs.

PROG: 9/1/06 WELL ON FLOWBACK, FLOWBACK REPORT: CP: 550#, TP: 100#, OPEN CHK, 90 BWPH, 18 HRS, SD: LIGHT, TTL BBLs FLWD: 1790 BBLs, TODAY'S LTR: 5105 BBLs, LOAD REC TODAY: 1790 BBLs, REMAINING LTR: 3315 BBLs, TOTAL LOAD REC TO DATE: 3790 BBLs.

WELL WENT ON SALES: 09/03/2006, 1:30 P.M. 700 MCF, 22/64 CHK, SICP:1800#. FTP: 800/1800. 30BWPH.

09/05/06

ON SALES
09/03/06: 580 MCF, 0 BC, 465 BW, TP: 850#, CP: 1700#, 22/64 CHK, 15.5 HRS, LP: 140#.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires: November 30, 2000

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5. Lease Serial No.
UTU-037166

1a. Type of Well Oil Well Gas Dry Other
b. Type of Completion: New Work Over Deepen Plug Back Diff. Reserv.
Other _____

6. If Indian, Allottee or Tribe Name

2. Name of Operator
KERR MCGEE OIL & GAS ONSHORE LP

7. Unit or CA Agreement Name and No

3. Address 3a. Phone No. (include area code)
1368 SOUTH 1200 EAST VERNAL, UTAH 84078 (435)-781-7024

8. Lease Name and Well No.
FEDERAL 1022-33G

4. Location of Well (Report locations clearly and in accordance with Federal requirements)*

At surface SWNE 1650'FNL, 2052'FEL

9. API Well No.
4304735742

At top prod. interval reported below

10. Field and Pool, or Exploratory
NATURAL BUTTES

At total depth

11. Sec., T., R., M., or Block and Survey or Area SEC 33, T10S, R22E

14. Date Spudded 15. Date T.D. Reached 16. Date Completed
06/04/06 08/21/06 09/03/06
 D & A Ready to Prod.

12. County or Parish 13. State
UINTAH UTAH

17. Elevations (DF, RKB, RT, GL)*
5531'GL

18. Total Depth: MD 8419' TVD 19. Plug Back T.D.: MD 8350' TVD 20. Depth Bridge Plug Set: MD TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each) 22. Was well cored? No Yes (Submit copy)
Was DST run? No Yes (Submit copy)
Directional Survey? No Yes (Submit copy)

CBL-CCL-GR

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
20"	14"	36.7#		40'		28 SX			
12 1/4"	9 5/8"	32.3#		1750'		440 SX			
7 7/8"	4 1/2"	11.6#		8419'		1611 SX			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Set (MD)
2 3/8"	7265'							

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) WASATCH	5598'	6334'	5598'-6334'	0.35	44	OPEN
B) MESAVERDE	6501'	8181'	6501'-8181'	0.35	160	OPEN
C)						
D)						

27. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Depth Interval	Amount and type of Material
5598'-6334'	PMP 1228 BBLs LIGHTNING 18 & 148,365# 20/40 MESH SD
6501'-8181'	PMP 6333 BBLs LIGHTNING 18, 20 & 784,497# 20/40 MESH SD

OCT 11 2006

DIV. OF OIL & GAS

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
09/03/06	09/09/06	24	→	0	964	360			FLows FROM WELL
Choke Size	Tbg. Press. Flwg. 425# SI	Csg. Press. 1088#	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Well Status	
23/64	SI	1088#	→	0	964	360			PRODUCING GAS WELL

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
09/03/06	09/09/06	24	→	0	964	360			FLows FROM WELL
Choke Size	Tbg. Press. Flwg. 425# SI	Csg. Press. 1088#	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Well Status	
23/64	SI	1088#	→	0	964	360			PRODUCING GAS WELL

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	

29. Disposition of Gas (Sold, used for fuel, vented, etc.)

SOLD

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
WASATCH MESAVERDE	3996' 6380'	6380'			

32. Additional remarks (include plugging procedure):

33. Circle enclosed attachments:

- 1. Electrical/Mechanical Logs (1 full set req'd.)
- 2. Geologic Report
- 3. DST Report
- 4. Directional Survey
- 5. Sundry Notice for plugging and cement verification
- 5. Core Analysis
- 7. Other:

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) SHEILA UPCHEGO Title REGULATORY ANALYST

Signature  Date 10/2/2006

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU-037166

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
FEDERAL 1022-33G

9. API Well No.
4304735742

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
KERR-McGEE OIL & GAS ONSHORE LP

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SWNE SEC. 33, T10S, R22E 1650'FNL, 2052'FEL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other MAINTENANCE

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

10/10/06
RR FR STATE 1022-320 TO LOC. SPOT RIG & EQUIP. RU RIG. KILL WELL. DNWH, NU BOP. UNLND TBG. POOH W/TBG WHILE INSPECTING FOR PINCH. TBG JTS #96 & 99 HAD CRIMPS FROM RIG SLIPS, DEPTHS WERE 3063' & 3161' RESPECTIVELY. PU LUBRICATOR & BROACH. RIH, BROACH TO SN. POOH W/BROACH & SB LUB. RIH W/TBG, PU 2 NEW JTS TO REPLC #s 96 & 99. PU LUB RIH W/BROACH TO BE SURE TBG WAS CLR TO 3600'. POOH, LD BRCH & LUB. RU PMP TO WELL, KILL. PU HNGR, LND TBG W/230 JTS IN HOLE. EOT @ 8419.49'. RD RIG FLR, ND BOP, NU WH & FL. TURN WELL OVER TO PRODUCTION.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) Sheila Upchego	Title Regulatory Analyst
Signature 	Date November 1, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED

NOV 07 2006

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

UTU-037166

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

FEDERAL 1022-33G

9. API Well No.

4304735742

10. Field and Pool, or Exploratory Area

NATURAL BUTTES

11. County or Parish, State

UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

KERR-McGEE OIL & GAS ONSHORE LP

3a. Address

1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SWNE SEC. 33, T10S, R22E 1650'FNL, 2052'FEL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other <u>MAINTENANCE</u>

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

01/04/07 C/O SCALED RIG UP, SPOT EQUIP, TBG. HAD 300 PSI, CSG. HAD 200 PSI, BLED OFF, PUMP 20 BBLs. DOWN CSG. PULL & TALLY TBG. SCALE IN TBG. GOT PROGRESSIVELY WORSE, FOUND PLUNGER IN TBG. @ 6100', COULD NOT GET OUT. PICK UP 51 JTS. YB TBG. OFF FLOAT & RUN IN HOLE, PULLED & STOOD IN DERRICK, START RUNNING SCALED UP TBG. OUT OF DERRICK, RUN 14 STANDS, SDFN 5:30PM. 01/05/07 TBG & CSG HAD 800 PSI, BLEED DOWN, KILL WELL W/20 BBLs. RUN 136 JTS TBG OUT OF DERRICK, SCALE CLEANED UP, LAY DOWN 137 JTS SCALY TBG ON FLOAT. BREAK OUT R NIPPLE, SPRING SCALED IN BOTTOM JT. MAKE UP 3 7/8" MILL ON POBS, RUN 142 JTS OUT OF DERRICK, REMOVE PROTECTORS. TALLY, PICK UP & RUN 116 JTS OFF FLOAT. TAG UP @ 8266', 85' RAT HOLE. LAY DOWN 27 JTS, LAND TBG. ON HANGER W/ 232 JTS IN HOLE, EOT @ 7455'. DROP BALL & PUMP OF POBS. SDFN 5:00PM 01/08/07 LAND TBG/RDMO TBG. & CSG. HAD 1200 PSI, BLEED DOWN, KILL WELL W/ 20BBLs. MAKE UP BROACH & RUN TO 7400', OK, LAY DOWN SINKER BARS & LUBRICATOR, ND BOP'S, NU WELL HEAD. RD, CLEAN UP

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

SHEILA UPCHEGO

Signature

Title

SENIOR LAND ADMIN SPECIALIST

Date

January 17, 2007

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

JAN 27 2007

DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-037166
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: FEDERAL 1022-33G
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.	9. API NUMBER: 43047357420000
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	PHONE NUMBER: 720 929-6007 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1650 FNL 2052 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNE Section: 33 Township: 10.0S Range: 22.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 5/15/2010	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input checked="" type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: _____

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

THIS WELL RETURNED TO PRODUCTION ON 5/15/2010.

**Accepted by the
Utah Division of
Oil, Gas and Mining**

FOR RECORD ONLY

June 17, 2010

NAME (PLEASE PRINT) Andy Lytle	PHONE NUMBER 720 929-6100	TITLE Regulatory Analyst
SIGNATURE N/A		DATE 6/15/2010

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-037166
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: FEDERAL 1022-33G
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.	9. API NUMBER: 43047357420000
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	PHONE NUMBER: 720 929-6007 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1650 FNL 2052 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNE Section: 33 Township: 10.0S Range: 22.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 5/15/2010	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input checked="" type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: _____

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

THIS WELL RETURNED TO PRODUCTION ON 5/15/2010.

**Accepted by the
Utah Division of
Oil, Gas and Mining**

FOR RECORD ONLY

June 17, 2010

NAME (PLEASE PRINT) Andy Lytle	PHONE NUMBER 720 929-6100	TITLE Regulatory Analyst
SIGNATURE N/A		DATE 6/15/2010

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

5. LEASE DESIGNATION AND SERIAL NUMBER:
UTU-037166

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

1. TYPE OF WELL
Gas Well

8. WELL NAME and NUMBER:
FEDERAL 1022-33G

2. NAME OF OPERATOR:
KERR-MCGEE OIL & GAS ONSHORE, L.P.

9. API NUMBER:
43047357420000

3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779
PHONE NUMBER: 720 929-6515 Ext

9. FIELD and POOL or WILDCAT:
NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE:
1650 FNL 2052 FEL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:
Qtr/Qtr: SWNE Section: 33 Township: 10.0S Range: 22.0E Meridian: S

COUNTY:
UINTAH

STATE:
UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start: <input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 2/17/2011 <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input checked="" type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The subject well location has returned to production from a shut-in status on Thursday, February 17, 2011.

**Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY**

NAME (PLEASE PRINT) Gina Becker	PHONE NUMBER 720 929-6086	TITLE Regulatory Analyst II
SIGNATURE N/A	DATE 3/21/2011	

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: KERR MCGEE OIL & GAS ONSHORE LP Operator Account Number: N 2995
 Address: 1368 SOUTH 1200 EAST
city VERNAL
state UT zip 84078 Phone Number: (435) 781-7024

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
Various	NBU REVISION						UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
E	Various	2900	3/13/2012			2/1/2012	
Comments: MOVE THE ATTACHED WELLS INTO THE NATURAL BUTTES UNIT REVISION EFFECTIVE 02/01/2012. <i>72 wells</i> 5/31/2012							

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
Comments:							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
Comments:							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

SHEILA WOPSOCK

Name (Please Print)

Signature

REGULATORY ANALYST

Title

5/30/2012

Date

RECEIVED

MAY 31 2012

Div. of Oil, Gas & Mining

Entity Action Form Attachment for wells moved into the Natural Buttes Unit Effective 02/01/2012.

API	Well Name	QTR/QTR / Section	TWNSHP	RANGE	Producing Intervals
4304737079	FEDERAL 920-25I	NESE <i>orig entity</i> 15431	25 9S	20E	WASATCH/MESAVERDE
4304737080	FEDERAL 920-25H	SENE 15761	25 9S	20E	WASATCH/MESAVERDE
4304737081	FEDERAL 920-25A	NENE 15553	25 9S	20E	WASATCH/MESAVERDE from MURD
4304739098	STATE 1021-28M	SWSW 16499	28 10S	21E	WASATCH To WSMVD
4304737918	FEDERAL 1021-26L	NWSW 16390	26 10S	21E	MESAVERDE To WSMVD
4304737919	FEDERAL 1021-26N	SESW 16391	26 10S	21E	WASATCH/MESAVERDE
4304737916	FEDERAL 1021-25O	SWSE 16277	25 10S	21E	WASATCH/MESAVERDE
4304739112	STATE 1021-31M	SWSW 16454	31 10S	21E	WASATCH To WSMVD
4304739127	STATE 1021-32P	SESE 16471	32 10S	21E	WASATCH/MESAVERDE
4304739128	STATE 1021-32O	SWSE 17513	32 10S	21E	WASATCH/MESAVERDE
4304739131	STATE 1021-32L	NWSW 16902	32 10S	21E	WASATCH/MESAVERDE
4304739133	STATE 1021-32J	NWSE 17529	32 10S	21E	WASATCH/MESAVERDE
4304739134	STATE 1021-32I	NESE 16905	32 10S	21E	WSMVD
4304739135	STATE 1021-32H	SENE 17528	32 10S	21E	WASATCH/MESAVERDE
4304735714	FEDERAL 1022-29H	SENE 15147	29 10S	22E	WASATCH/MESAVERDE
4304735715	FEDERAL 1022-29F	SENW 15162	29 10S	22E	WASATCH/MESAVERDE
4304735716	FEDERAL 1022-29B	NWNE 11492	29 10S	22E	WASATCH/MESAVERDE
4304735737	FEDERAL 1022-29I	NESE 15001	29 10S	22E	WASATCH/MESAVERDE
4304735738	FEDERAL 1022-29D	NWNW 15016	29 10S	22E	MESAVERDE To WSMVD
4304734862	FEDERAL 31-10-22	SESE 13879	31 10S	22E	MESAVERDE To WSMVD
4304735173	FEDERAL 1022-31D	NWNW 14132	31 10S	22E	WASATCH/MESAVERDE
4304736492	FEDERAL 1022-31N	SESW 16255	31 10S	22E	WASATCH/MESAVERDE
4304736493	FEDERAL 1022-31I	NESE 15089	31 10S	22E	WASATCH/MESAVERDE
4304736494	FEDERAL 1022-31G	SWNE 15075	31 10S	22E	WASATCH/MESAVERDE
4304736495	FEDERAL 1022-31F	SENE 15230	31 10S	22E	WASATCH/MESAVERDE
4304736574	FEDERAL 1022-31C	NENW 15090	31 10S	22E	WASATCH/MESAVERDE
4304736575	FEDERAL 1022-31J	NWSE 15214	31 10S	22E	WASATCH/MESAVERDE
4304736576	FEDERAL 1022-31L	NWSW 16276	31 10S	22E	WASATCH/MESAVERDE
4304734317	STATE 1-32	NESW 13419	32 10S	22E	WASATCH/MESAVERDE
4304734831	STATE 2-32	SESW 13842	32 10S	22E	MESAVERDE To WSMVD
4304734832	STATE 3-32	NWSW 13844	32 10S	22E	WASATCH/MESAVERDE
4304735095	STATE 1022-32J	NWSE 114097	32 10S	22E	WSMVD
4304735096	STATE 1022-32A	NENE 13914	32 10S	22E	WASATCH/MESAVERDE
4304735186	STATE 1022-32P	SESE 14131	32 10S	22E	MESAVERDE To WSMVD
4304735315	STATE 1022-32O	SWSE 14114	32 10S	22E	WASATCH/MESAVERDE
4304735647	STATE 1022-32H	SENE 14348	32 10S	22E	MESAVERDE To WSMVD
4304736413	STATE 1021-36O	SWSE 15619	36 10S	21E	WASATCH/MESAVERDE
*4304738157	WELL BELONGS TO QEP ENERGY CORP "GH 8-20-8-21" PERMIT NOT APPROVED				
4304734839	FEDERAL 1022-15F	SENW 14618	15 10S	22E	WASATCH/MESAVERDE
4304736414	STATE 1021-36J	NWSE 15651	36 10S	21E	WASATCH/MESAVERDE
4304738152	STATE 1021-36L	NWSW 16012	36 10S	21E	WASATCH/MESAVERDE
4304735440	FEDERAL 1022-15J	NWSE 14617	15 10S	22E	WASATCH/MESAVERDE
4304736415	STATE 1021-36I	NESE 15684	36 10S	21E	WASATCH/MESAVERDE
4304738845	STATE 1021-36D	NWNW 16455	36 10S	21E	WASATCH/MESAVERDE

4304750096	FEDERAL 1022-27H	SENE	17626	27 10S	22E	WASATCH/MESAVERDE	
4304736416	STATE 1021-36H	SENE	15335	36 10S	21E	WASATCH/MESAVERDE	
4304738846	STATE 1021-36E	SWNW	16523	36 10S	21E	WASATCH/MESAVERDE	
4304735676	FEDERAL 1022-28L	NWSW	15110	28 10S	22E	WASATCH/MESAVERDE	
4304736417	STATE 1021-36G	SWNE	15297	36 10S	21E	WASATCH/MESAVERDE	
4304738847	STATE 1021-36F	SENE	16394	36 10S	21E	WASATCH/MESAVERDE	
4304735713	FEDERAL 1022-28N	SESW	15145	28 10S	22E	WASATCH/MESAVERDE	
4304736418	STATE 1021-36B	NWNE	14953	36 10S	21E	WASATCH/MESAVERDE	
4304738848	STATE 1021-36N	SESW	16359	36 10S	21E	WASATCH/MESAVERDE	
4304735735	FEDERAL 1022-28O	SWSE	15285	28 10S	22E	WASATCH/MESAVERDE	from MURD
4304736419	STATE 1021-36A	NENE	15035	36 10S	21E	WASATCH/MESAVERDE	
4304738849	STATE 1021-36K	NESW	16084	36 10S	21E	WASATCH/MESAVERDE	
4304735736	FEDERAL 1022-28M	SWSW	15286	28 10S	22E	WASATCH/MESAVERDE	
4304736420	STATE 1021-36P	SESE	15372	36 10S	21E	WASATCH/MESAVERDE	
4304738850	STATE 1021-36C	NENW	16396	36 10S	21E	WASATCH/MESAVERDE	
4304734861	FEDERAL 29-10-22	SESE	14006	29 10S	22E	MESAVERDE	TO WSMVD
4304735577	FEDERAL 1022-33O	SWSE	15080	33 10S	22E	WASATCH/MESAVERDE	
4304735739	FEDERAL 1022-33E	SWNW	15193	33 10S	22E	WASATCH/MESAVERDE	
4304735740	FEDERAL 1022-33M	SWSW	15373	33 10S	22E	WASATCH/MESAVERDE	
4304735741	FEDERAL 1022-33L	NWSW	15511	33 10S	22E	WASATCH/MESAVERDE	
4304735742	FEDERAL 1022-33G	SWNE	15404	33 10S	22E	WASATCH/MESAVERDE	from MURD
4304735743	FEDERAL 1022-33C	NENW	15405	33 10S	22E	WASATCH/MESAVERDE	
4304735744	FEDERAL 1022-33A	NENE	15539	33 10S	22E	WASATCH/MESAVERDE	
4304737105	FEDERAL 1022-33D	NWNW	16502	33 10S	22E	WASATCH/MESAVERDE	
4304737106	FEDERAL 1022-33F	SENE	16560	33 10S	22E	WASATCH/MESAVERDE	from WSTC
4304737107	FEDERAL 1022-33K	NESW	16124	33 10S	22E	WASATCH/MESAVERDE	
4304737109	FEDERAL 1022-33N	SESW	16126	33 10S	22E	WASATCH/MESAVERDE	
4304737110	FEDERAL 1022-33B	NWNE	16561	33 10S	22E	WASATCH/MESAVERDE	
4304735810	STATE 1021-36E	SWNW	14295	36 10S	21E	WASATCH/MESAVERDE	

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-037166
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: FEDERAL 1022-33G
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.	9. API NUMBER: 43047357420000
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	PHONE NUMBER: 720 929-6100
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1650 FNL 2052 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNE Section: 33 Township: 10.0S Range: 22.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 5/6/2014 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input checked="" type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The operator requests authorization to plug and abandon the subject well location. Attached is the plug and abandonment procedure.

**Accepted by the
 Utah Division of
 Oil, Gas and Mining
 May 07, 2014**

Date: _____

By: Debra K. Quist

NAME (PLEASE PRINT) Teena Paulo	PHONE NUMBER 720 929-6236	TITLE Staff Regulatory Specialist
SIGNATURE N/A	DATE 5/6/2014	

FEDERAL 1022-33G
1650' FNL & 2052' FEL
SWNE SEC. 33, T10S, R22E
Uintah County, UT

KBE: 5545'
GLE: 5531'
TD: 8419'
PBTD: 8350'

API NUMBER: 4304735742
LEASE NUMBER: UTU-037166

CASING : 12 ¼" hole
 9.625" 32.3# H-40 @ 1750'
 Cmt w/ 565sx

7.875" hole
 4.5" 11.6# I-80 @ 8419'
 8rd LTC Threads
 TOC @ Surface

PERFORATIONS: Wasatch 5598' - 6334'
 Mesaverde 6501' - 8181'

TUBING: Tubing and rods pulled 4/23/12.

Tubular/Borehole	Drift inches	Collapse psi	Burst Psi	Capacities		
				Gal./ft.	Cuft./ft.	Bbl./ft.
2.375" 4.7# J-55 tbg.	1.901	8100	7700	0.1626	0.02171	0.00387
4.5" 11.6# N/M/I-80 csg	3.875	6350	7780	0.6528	0.0872	0.0155
9.625" 32.3# H-40 csg	8.845	1400	2270	3.3055	0.4418	0.0787
Annular Capacities						
2.375" tbg. X 4.5" 11.6# csg.				0.4226	0.0565	0.01
4.5" csg. X 9.625" 32.3# csg.				2.478	0.3314	0.059
4.5" csg. X 7.875" hole				1.7052	0.2278	0.0406
9.625" csg. X 12.25" hole				2.3436	0.3132	0.0558

GEOLOGIC INFORMATION:

Formation	Depth to top, ft.
Uinta	Surface
Green River	970'
Bird's Nest	1336'
Mahogany	1692'
Base of Parachute	2469'
Wasatch	3996'
Mesaverde	6380'

Tech. Pub. #92 Base of USDW's

USDW Elevation ~1200' MSL
 USDW Depth ~4345' KBE

FEDERAL 1022-33G PLUG & ABANDONMENT PROCEDURE

GENERAL

- H₂S MAY BE PRESENT. CHECK FOR H₂S AND TAKE APPROPRIATE PRECAUTIONS.
- CEMENT QUANTITIES BELOW ASSUME NEAT CLASS G, YIELD 1.145 CUFT./SX. IF A DIFFERENT PRODUCT IS USED, WELLSITE PERSONNEL ARE RESPONSIBLE FOR CORRECTING QUANTITIES TO YIELD THE STATED SLURRY VOLUME. WHEN SQUEEZING, INCLUDE 10% EXCESS PER 1000' OF DEPTH.
- TREATED FRESH WATER WILL BE PLACED BETWEEN ALL PLUGS INSTEAD OF BRINE.
- ALL DISPLACEMENT FLUID SHALL CONTAIN CORROSION INHIBITOR AND BIOCIDES. PREMIX 5 GALLONS PER 100 BBLs FLUID.
- NOTIFY APPROPRIATE AGENCY 24 HOURS BEFORE MOVING ON LOCATION.
- A GPS READING WILL NEED TO BE TAKEN AT THE WELL SITE AND RECORDED IN OPENWELLS. PLEASE TAKE IT TO THE 6TH DECIMAL PLACE.

PROCEDURE

Note: Approx. 256 sx Class "G" cement needed for procedure & (1) 4.5" CIBP

Note: No gyro survey on record for this wellbore.

1. A GPS READING WILL NEED TO BE TAKEN AT THE WELL SITE AND RECORDED IN OPENWELLS. PLEASE TAKE IT TO THE 6TH DECIMAL PLACE.
2. MIRU. KILL WELL AS NEEDED. ND WH, NU AND TEST BOPE.
3. POOH W/ TBG & L/D SAME. RU WIRELINE AND MAKE A GAUGE RING RUN TO CHECK FOR FILL. RUN GYRO SURVEY.
4. **PLUG #1, ISOLATE MESAVERDE/WASATCH PERFORATIONS (5598' - 8181')RIH W/ 4 ½" CIBP. SET @ ~5580'. RELEASE CIBP, PUH 10', BRK CIRC W/ FRESH WATER. RELEASE CIBP, PUH 10', BRK CIRC W/ TREATED FRESH WATER. DISPLACE A MINIMUM OF 8.7 CUFT / 1.5 BBL /~8 SX ON TOP OF PLUG. PUH ABOVE TOC (~5480'). REVERSE CIRCULATE W/ TREATED WATER (~15.8 BBLs).**
5. **PLUG #2, PROTECT WASATCH TOP (3996') & BASE OF USDW (~4345'): PUH TO ~4460'. BRK CIRC W/ FRESH WATER. DISPLACE 50.6 CUFT / 9.0 BBL /~44 SX AND BALANCE PLUG W/ TOC @ ~3880' (580' COVERAGE). PUH ABOVE TOC. REVERSE CIRCULATE W/ TREATED WATER (~19.8 BBLs).**
6. **PLUG #3, PROTECT BASE OF PARACHUTE (~2469'): PUH TO ~2600'. BRK CIRC W/ FRESH WATER. DISPLACE 26.2 CUFT / 4.7 BBL /~23 SX AND BALANCE PLUG W/ TOC @ ~2300' (300' COVERAGE). PUH ABOVE TOC. REVERSE CIRCULATE W/ TREATED WATER (~7.8 BBLs).**
7. **PLUG #4, PROTECT TOP OF MAHOGANY (1692'), TOP OF BIRD'S NEST (~1336') & TOP OF GREEN RIVER (970'): PUH TO ~1800'. BRK CIRC W/ FRESH WATER. DISPLACE 81.1 CUFT / 14.4 BBL /~71 SX AND BALANCE PLUG W/ TOC @ ~870' (930' COVERAGE). PUH ABOVE TOC. REVERSE CIRCULATE W/ TREATED WATER (~8.8 BBLs).**
8. **PLUG #5, FILL SURFACE HOLE & ANNULUS: POOH. HOOK UP 1" PIPE AND PUMP 125.6 CUFT / 22.4 BBL /~110 SX OR SUFFICIENT VOLUME TO FILL 4 ½" CASING AND 4.5" X 9.625" ANNULUS F/ 300' TO SURFACE.**
9. CUT OFF WELLHEAD AND INSTALL MARKER PER REGULATIONS.
10. RDMO. TURN OVER TO OPERATIONS FOR SURFACE REHAB. SURFACE RECLAMATION TO BE PERFORMED IN ACCORDANCE TO REGULATIONS.

ALM 5/1/2014

RECEIVED: May. 06, 2014




PROJECT COMPUTATIONS

NO. _____ OF _____ SHEETS

DATE _____ PROJECT Fed 1022-336 JOB NO. _____

BY _____ CHK.: _____ SUBJECT _____

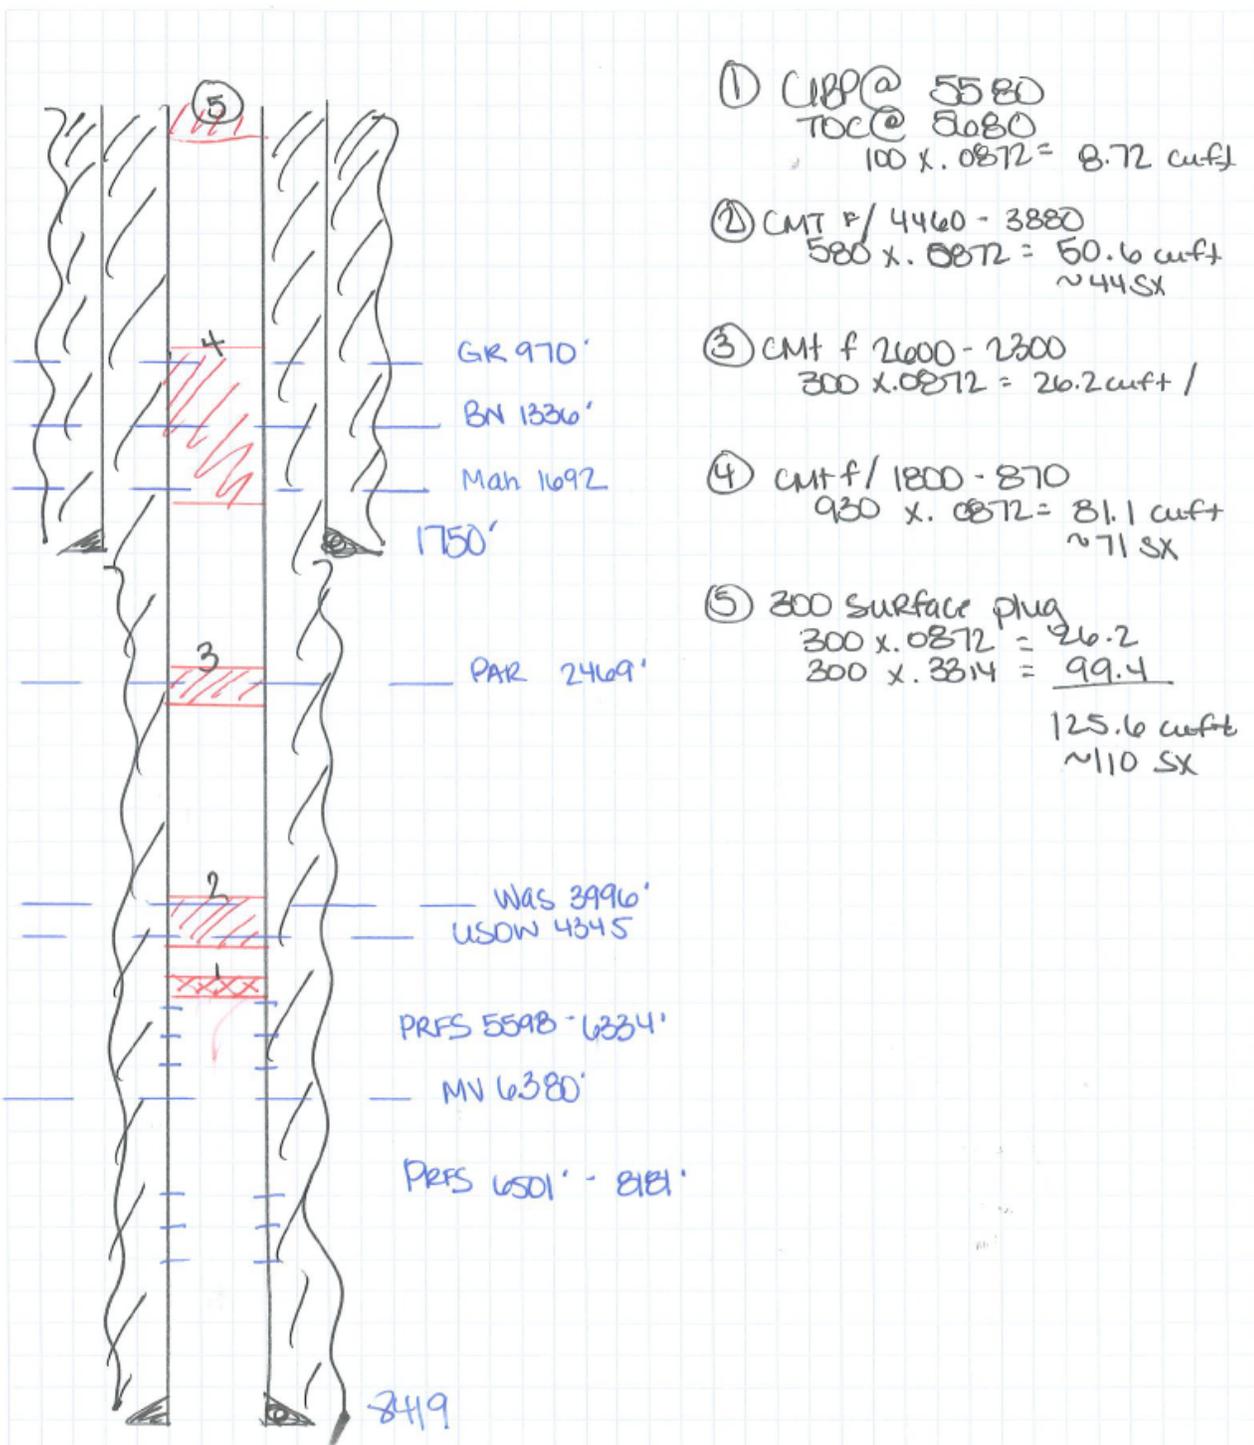

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-037166
SUNDRY NOTICES AND REPORTS ON WELLS		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
1. TYPE OF WELL Gas Well		8. WELL NAME and NUMBER: FEDERAL 1022-33G
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		9. API NUMBER: 43047357420000
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	PHONE NUMBER: 720 929-6507	9. FIELD and POOL or WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1650 FNL 2052 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNE Section: 33 Township: 10.0S Range: 22.0E Meridian: S		COUNTY: UINTAH
		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start: <input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 12/30/2015 <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> OPERATOR CHANGE <input checked="" type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> WILDCAT WELL DETERMINATION <input type="checkbox"/> OTHER	
	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.		
Kerr-McGee Oil & Gas Onshore, LP has plugged and abandoned the FEDERAL 1022-33G well. Please see the operations summary report for details. Thank you.		
Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY January 06, 2016		
NAME (PLEASE PRINT) Jennifer Thomas	PHONE NUMBER 720 929-6808	TITLE Regulatory Specialist
SIGNATURE N/A		DATE 1/4/2016

US ROCKIES REGION
Operation Summary Report

US ROCKIES REGION								
Operation Summary Report								
Well: FEDERAL 1022-33G					Spud date: 8/11/2006			
Project: UTAH-UINTAH			Site: FEDERAL 1022-33G			Rig name no.: WESTERN WELL SERVICES 9/9		
Event: ABANDONMENT			Start date: 11/30/2015		End date: 12/30/2015			
Active datum: RKB @5,542.99usft (above Mean Sea Level)				UWI: FEDERAL 1022-33G				
Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD from (usft)	Operation
12/28/2015	7:00 - 7:15	0.25	ABANDP	48		P		HSM, JSA
	7:15 - 10:30	3.25	ABANDP	30	G	P		ROAD RIG FROM LOVE UNIT 1-12 TO FEDERAL 1022-33G
	10:30 - 18:00	7.50	ABANDP	30	A	P		MIRU, 2000# SICP, BLOW WELL DN FOR 3 HRS, PUMP 70BBLS T-MAC & COULDENT KILL WELL, CALL FOR FLOWBACK CREW TO FLOW OVER NIGHT
12/29/2015	7:00 - 7:15	0.25	ABANDP	48		P		HSM, JSA
	7:15 - 8:00	0.75	ABANDP	30	F	P		100# FCP, CONTROL WELL W/ 20 BBLS T-MAC, ND WH, NU BOP'S, RU FLOOR & TBG EQUIP
	8:00 - 10:00	2.00	ABANDP	34	I	P		MIRU CUTTERS WIRELINE, RIH W/ GAUGE RING TO 5600', POOH W/ GAUGE, RIH & SET CIBP @ 5580', POOH
	10:00 - 13:30	3.50	ABANDP	31	I	P		P/U TBG, TALLY & DRIFT TO CIBP @ 5580'
	13:30 - 16:30	3.00	ABANDP	51	D	P		MIRU PRO PETRO, FILL HOLE W/ T-MAC & PRESSURE TEST CSG TO 500#, MIX & PUMP 10SX @ 15.8PPG, DISPLACE W/ T-MAC, PUH TO 4460', MIX & PUMP 44SX @ 15.8PPG, DISPLACE W/ T-MAC, PUH TO 2600', MIX & PUMP 23 SX @ 15.8PPG, DISPLACE W/ T-MAC, PUH TO 1800', MIX & PUMP 71 SX @ 15.8PPG, DISPLACE W/ T-MAC, TOOH & LD REMAING JTS TBG
	16:30 - 18:00	1.50	ABANDP	34	H	P		RIH W/ PERF GUN, PERF CSG @ 300', POOH RD CUTTERS
12/30/2015	7:00 - 7:15	0.25	ABANDP	48		P		HSM, JSA
	7:15 - 8:30	1.25	ABANDP	30	C	P		PUMP DN 4-1/2" CSG & COULDENT CIRC UP 9-5/8" CSG, ND BOP'S NU WH, RDMO
	8:30 - 9:30	1.00	ABANDP	53	A	P		DIG AROUND WELLHEAD & CUT WELLHEAD OFF, FOUND 9-5/8" CSG ALREADY FULL
	9:30 - 10:00	0.50	ABANDP	51	D	P		RUN 100' OF 1" DN 4-1/2" CSG & FILL TO SURFACE W/ CMT
	10:00 - 12:00	2.00	ABANDP	53	A	P		WELD ON MARKER PLATE & BACKFILL