

NEWFIELD



December 17, 2004

State of Utah
Division of Oil, Gas & Mining
Attn: Diana Whitney
1594 West North Temple - Suite 1210
P.O. Box 145801
Salt Lake City, Utah 84114-5801

RE: Applications for Permit to Drill: Federal 5-19-8-18, 6-19-8-18, 9-19-8-18,
10-19-8-18, 11-19-8-18, 12-19-8-18, 13-19-8-18, 14-19-8-18, 15-19-8-18, and
16-19-8-18.

Dear Diana:

Enclosed find APD's on the above referenced wells. The proposed Federal 5-19-8-18 and 6-19-8-18 are Exception Locations. Our Land Department will send you the required Exception Location Letter. If you have any questions, feel free to give either Brad or myself a call.

Sincerely,


Mandie Crozier
Regulatory Specialist

mc
enclosures

RECEIVED
DEC 20 2004
DIV. OF OIL, GAS & MINING

Form 3160-3
(September 2001)

FORM APPROVED
OMB No. 1004-0136
Expires January 31, 2004

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

5. Lease Serial No.
UTU-36846

6. If Indian, Allottee or Tribe Name
N/A

7. If Unit or CA Agreement, Name and No.
N/A

8. Lease Name and Well No.
Federal 14-19-8-18

9. API Well No.
43-047-36192

10. Field and Pool, or Exploratory
Eight Mile Flat

11. Sec., T., R., M., or Blk. and Survey or Area
SE/SW Sec. 19, T8S R18E

12. County or Parish
Uintah

13. State
UT

1a. Type of Work: DRILL REENTER

1b. Type of Well: Oil Well Gas Well Other Single Zone Multiple Zone

2. Name of Operator
Newfield Production Company

3a. Address
Route #3 Box 3630, Myton UT 84052

3b. Phone No. (include area code)
(435) 646-3721

4. Location of Well (Report location clearly and in accordance with any State requirements. *)
At surface SE/SW 659' FSL 1979' FWL 590548X 40.098131
At proposed prod. zone 4438979Y - 109.917739

14. Distance in miles and direction from nearest town or post office*
Approximatley 16.9 miles southeast of Myton, Utah

15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) Approx. 659' f/lse, NA f/unit
16. No. of Acres in lease
1178.69

17. Spacing Unit dedicated to this well
40 Acres

18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 1290'
19. Proposed Depth
6360'

20. BLM/BIA Bond No. on file
UTU0056

21. Elevations (Show whether DF, KDB, RT, GL, etc.)
5069' GL

22. Approximate date work will start*
2nd Quarter 2005

23. Estimated duration
Approximately seven (7) days from spud to rig release.

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification.
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature *Mandie Crozier* Name (Printed/Typed) Mandie Crozier Date 12/17/04

Title Regulatory Specialist

Approved by Signature *Bradley G. Hill* Name (Printed/Typed) BRADLEY G. HILL Date 12-27-04

Title ENVIRONMENTAL SCIENTIST III

Application approval does not warrant or certify the the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

Federal Approval of this
Action is Necessary

RECEIVED
DEC 20 2004
DIV. OF OIL, GAS & MINING

NEWFIELD PRODUCTION COMPANY
FEDERAL #14-19-8-18
SE/SW SECTION 19, T8S, R18E
UINTAH COUNTY, UTAH

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. GEOLOGIC SURFACE FORMATION:

Uinta formation of Upper Eocene Age

2. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:

Uinta	0' – 1640'
Green River	2380'
Wasatch	6360'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:

Green River Formation 2380' – 6360' - Oil

4. PROPOSED CASING PROGRAM

Please refer to the Monument Butte Field Standard Operation Procedure (SOP).

5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

Please refer to the Monument Butte Field SOP. See Exhibit "C".

6. TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:

Please refer to the Monument Butte Field SOP.

7. AUXILIARY SAFETY EQUIPMENT TO BE USED:

Please refer to the Monument Butte Field SOP.

8. TESTING, LOGGING AND CORING PROGRAMS:

Please refer to the Monument Butte Field SOP.

9. ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:

The anticipated maximum bottom hole pressure is 1800 psi. It is not anticipated that abnormal temperatures will be encountered.

10. ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:

Please refer to the Monument Butte Field SOP.

NEWFIELD PRODUCTION COMPANY
FEDERAL #14-19-8-18
SE/SW SECTION 19, T8S, R18E
UINTAH COUNTY, UTAH

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site Federal #14-19-8-18 located in the SE 1/4 SW 1/4 Section 19, T8S, R18E, Uintah County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 - 1.6 miles \pm to the junction of this highway and UT State Hwy 53; proceed southeasterly along Hwy 53 - 9.1 miles \pm to it's junction with an existing dirt road to the east; proceed easterly - 6.2 miles \pm to it's junction with the beginning of the proposed access road; proceed along the proposed access road - 4005' \pm to the proposed well location.

2. PLANNED ACCESS ROAD

See Topographic Map "B" for the location of the proposed access road.

3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

Please refer to the Monument Butte Field Standard Operating Procedure (SOP).

5. LOCATION AND TYPE OF WATER SUPPLY

Please refer to the Monument Butte Field SOP. See Exhibit "A".

6. SOURCE OF CONSTRUCTION MATERIALS

Please refer to the Monument Butte Field SOP.

7. METHODS FOR HANDLING WASTE DISPOSAL

Please refer to the Monument Butte Field SOP.

8. ANCILLARY FACILITIES

Please refer to the Monument Butte Field SOP.

9. WELL SITE LAYOUT

See attached Location Layout Diagram.

10. PLANS FOR RESTORATION OF SURFACE

Please refer to the Monument Butte Field SOP.

11. SURFACE OWNERSHIP - Bureau Of Land Management

12. OTHER ADDITIONAL INFORMATION

The Paleontological Resource Survey for this area is attached. Paleontological Resource Survey prepared by, Wade E. Miller, 9/27/04. See attached report cover page, Exhibit "D". The Archaeological Resource Survey will be forthcoming.

For the Federal #14-19-8-18 Newfield Production Company requests a 480' ROW be granted in Lease UTU-75532, 795' of disturbed area be granted in Lease UTU-74870, and 2730' of disturbed area be granted in Lease UTU-36846 to allow for construction of the proposed access road. **Refer to Topographic Map "B"**. The proposed access road will be an 18' crown road (9' either side of the centerline) with drainage ditches along either side of the proposed road whether it is deemed necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area. The maximum grade will be less than 8%. There will be no culverts required along this access road. There will be barrow ditches and turnouts as needed along this road. There are no fences encountered along this proposed road. There will be no new gates or cattle guards required. All construction material for this access road will be borrowed material accumulated during construction of the access road.

Newfield Production Company requests a 480' ROW be granted in Lease UTU-75532, 795' of disturbed area be granted in Lease UTU-74870, and 2730' of disturbed area be granted in Lease UTU-36846 to allow for construction of the proposed gas lines. It is proposed that the ROW and disturbed area will be 50' wide to allow for construction of a 6" gas gathering line, and a 3" poly fuel gas line. Both lines will tie in to the existing pipeline infrastructure. **Refer to Topographic Map "C."** For a ROW plan of development, please refer to the Monument Butte Field SOP.

Water Disposal

Immediately upon first production, all produced water will be confined to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E) or at State of Utah approved surface disposal facilities.

Threatened, Endangered, And Other Sensitive Species

None.

Reserve Pit Liner

Please refer to the Monument Butte Field SOP.

Location and Reserve Pit Reclamation

Please refer to the Monument Butte Field SOP.

The following seed mixture will be used on the topsoil stockpile, to the recontoured surface of the reserve pit, and for final reclamation: (All poundages are in pure live seed)

Shadscale	<i>Atriplex confertifolia</i>	4 lbs/acre
-----------	-------------------------------	------------

Gardner Saltbush	<i>Atriplex gardneri</i>	4 lbs/acre
Indian Rice Grass	<i>Oryzopsis hymenoides</i>	4 lbs/acre

Details of the On-Site Inspection

The proposed Federal #14-19-8-18 was on-sited on 9/15/04. The following were present; Brad Mecham (Newfield Production), David Gerbig (Newfield Production), and Byron Tolman (Bureau of Land Management). Weather conditions were clear at 75 degrees.

13. LESSEE'S OR OPERATORS REPRESENTATIVE AND CERTIFICATION

Representative

Name: Brad Mecham
Address: Route #3 Box 3630
Myton, UT 84052
Telephone: (435) 646-3721


Certification

Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #14-19-8-18 SE/SW Section 19, Township 8S, Range 18E: Lease UTU-36846 Uintah County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by Hartford Accident #4488944.

I hereby certify that the proposed drillsite and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

12/17/04



Date


Mandie Crozier
Regulatory Specialist
Newfield Production Company

NEWFIELD PRODUCTION COMPANY

FEDERAL 1A-19-8-18

Section 19, T8S, R18E, S.L.B.&M.

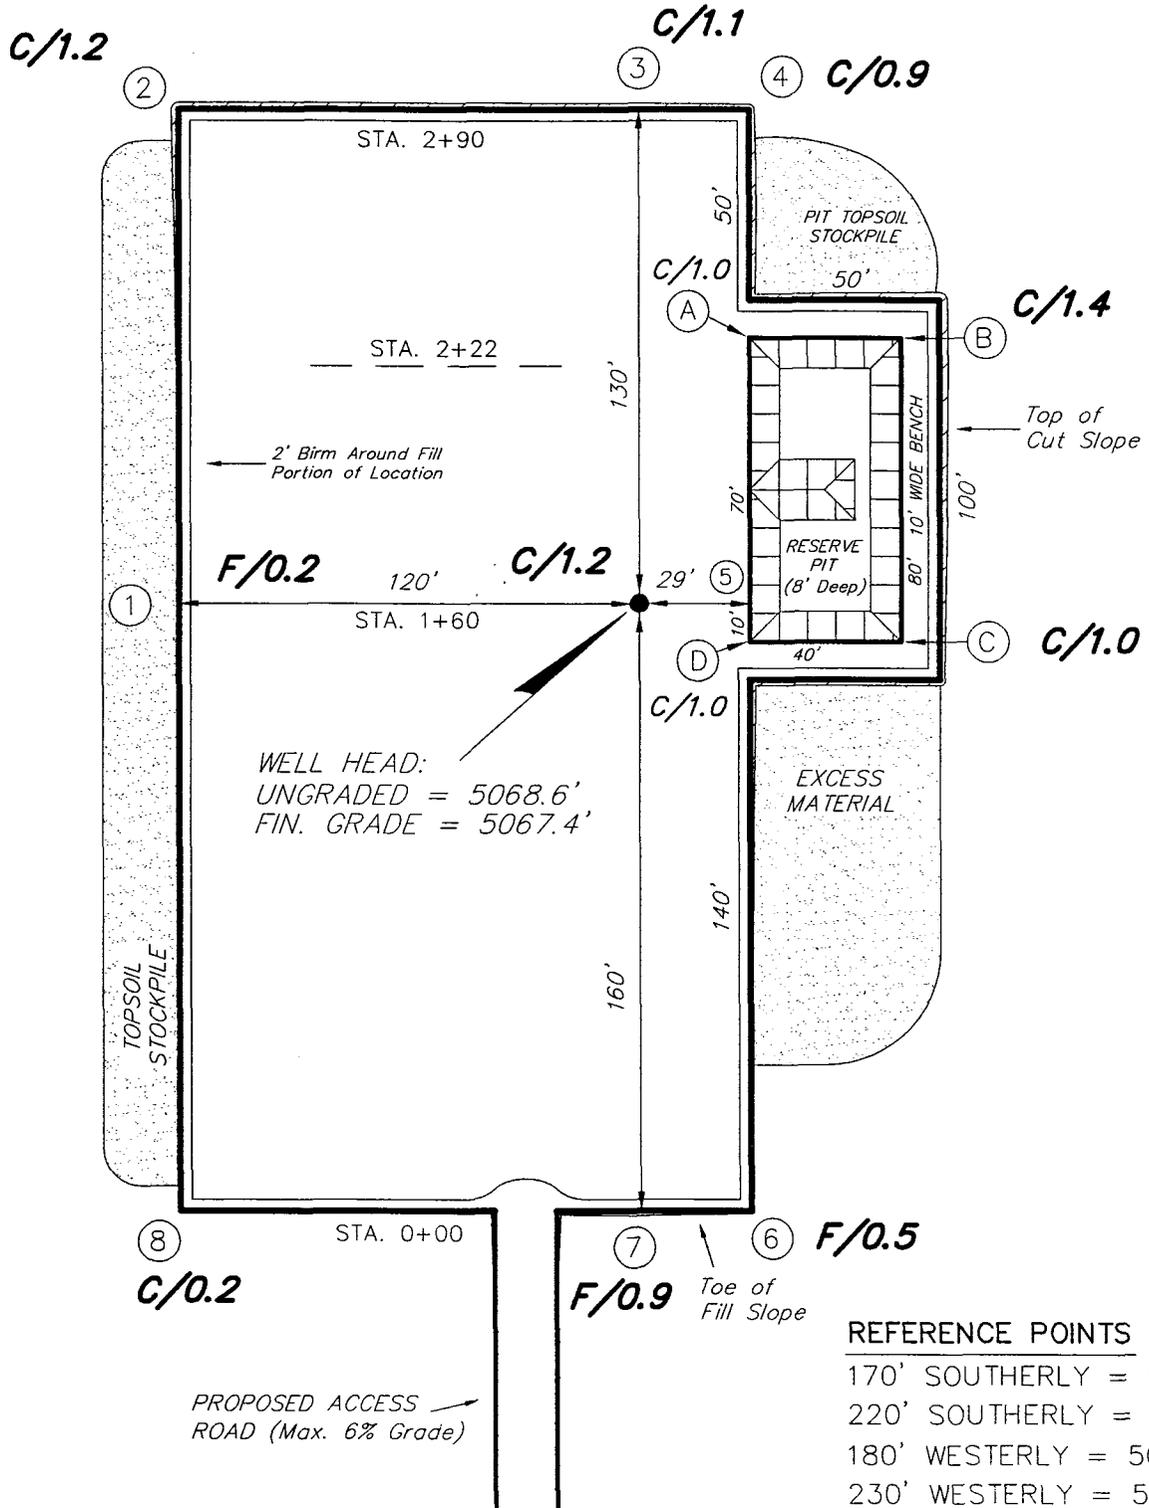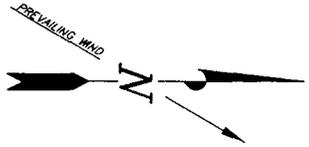

REFERENCE POINTS

- 170' SOUTHERLY = 5067.4'
- 220' SOUTHERLY = 5067.2'
- 180' WESTERLY = 5068.7'
- 230' WESTERLY = 5069.1'


SURVEYED BY: J.M.	SCALE: 1" = 50'
DRAWN BY: F.T.M.	DATE: 11-9-04

Tri State (435) 781-2501
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD PRODUCTION COMPANY


CROSS SECTIONS

FEDERAL 14-19-8-18

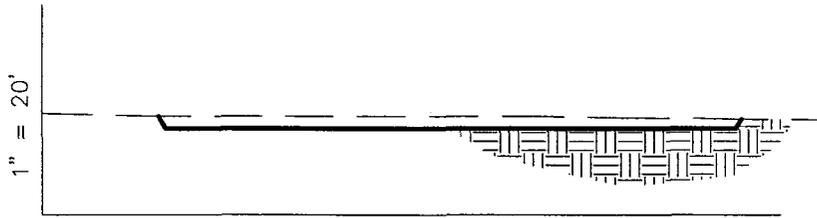


1" = 50'

STA. 2+90

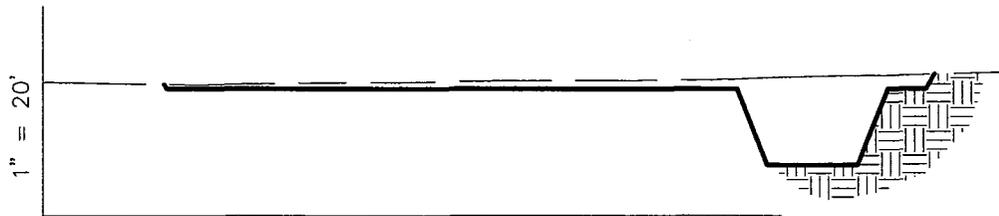


1" = 50'

STA. 2+22

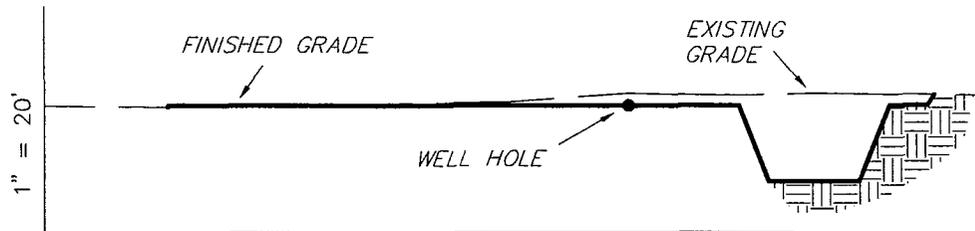

1" = 50'

STA. 1+60

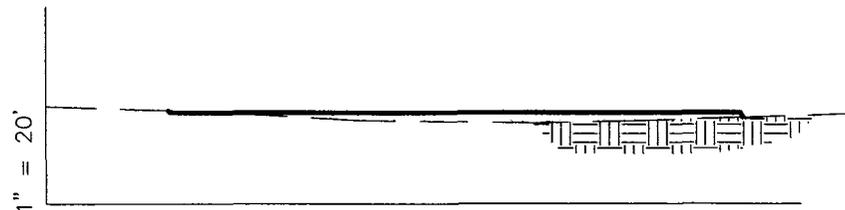

1" = 50'

STA. 0+00

NOTE:
UNLESS OTHERWISE NOTED
ALL CUT/FILL SLOPES ARE
AT 1.5:1

ESTIMATED EARTHWORK QUANTITIES
(No Shrink or swell adjustments have been used)
(Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	430	430	Topsoil is not included in Pad Cut	0
PIT	640	0		640
TOTALS	1,070	430	890	640

SURVEYED BY: J.M.

SCALE: 1" = 50'

DRAWN BY: F.T.M.


DATE: 11-9-04

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078
(435) 781-2501

NEWFIELD PRODUCTION COMPANY


TYPICAL RIG LAYOUT

FEDERAL 14-19-8-18

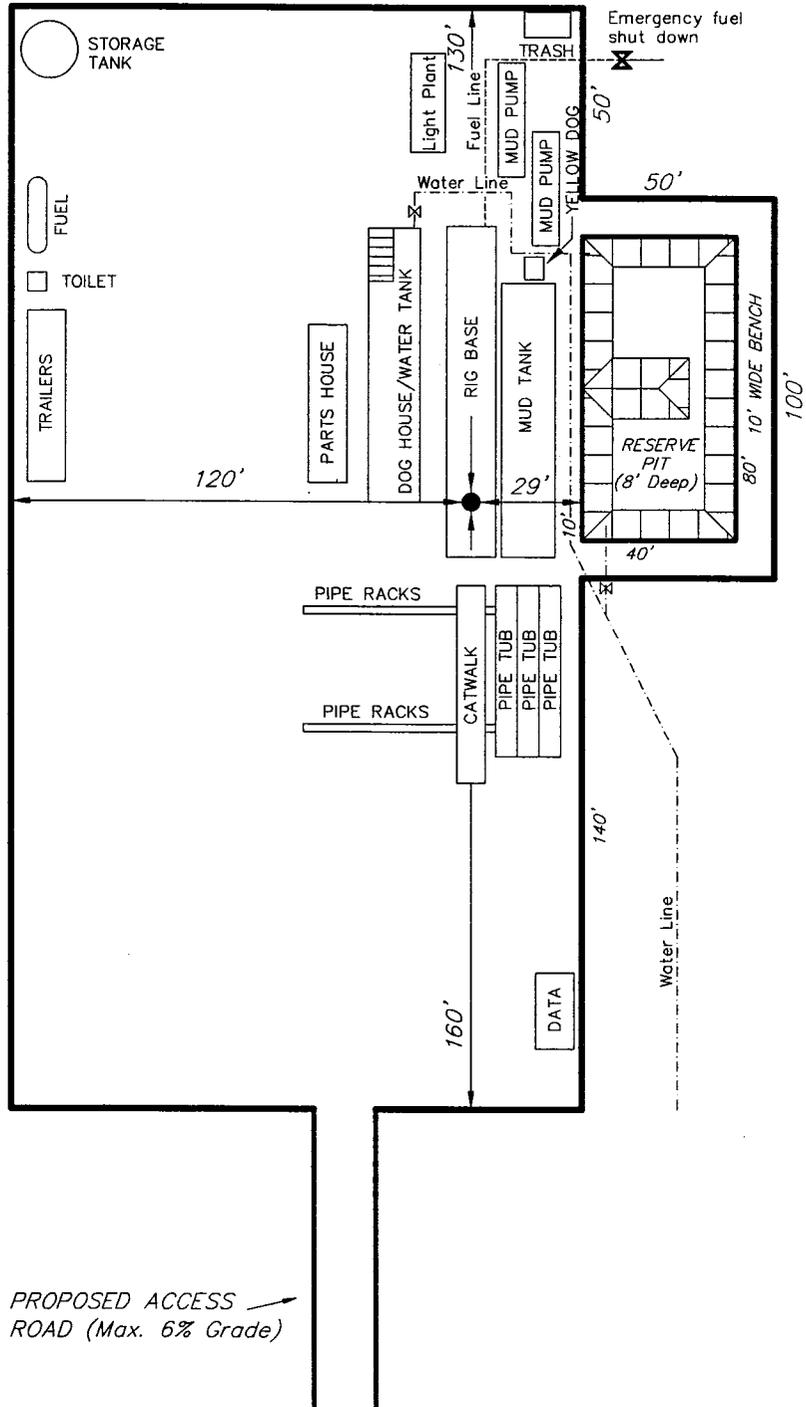

PROPOSED ACCESS ROAD (Max. 6% Grade) →

SURVEYED BY: J.M.	SCALE: 1" = 50'	Tri State Land Surveying, Inc. 180 NORTH VERNAL AVE. VERNAL, UTAH 84078 (435) 781-2501
DRAWN BY: F.T.M.	DATE: 11-9-04	

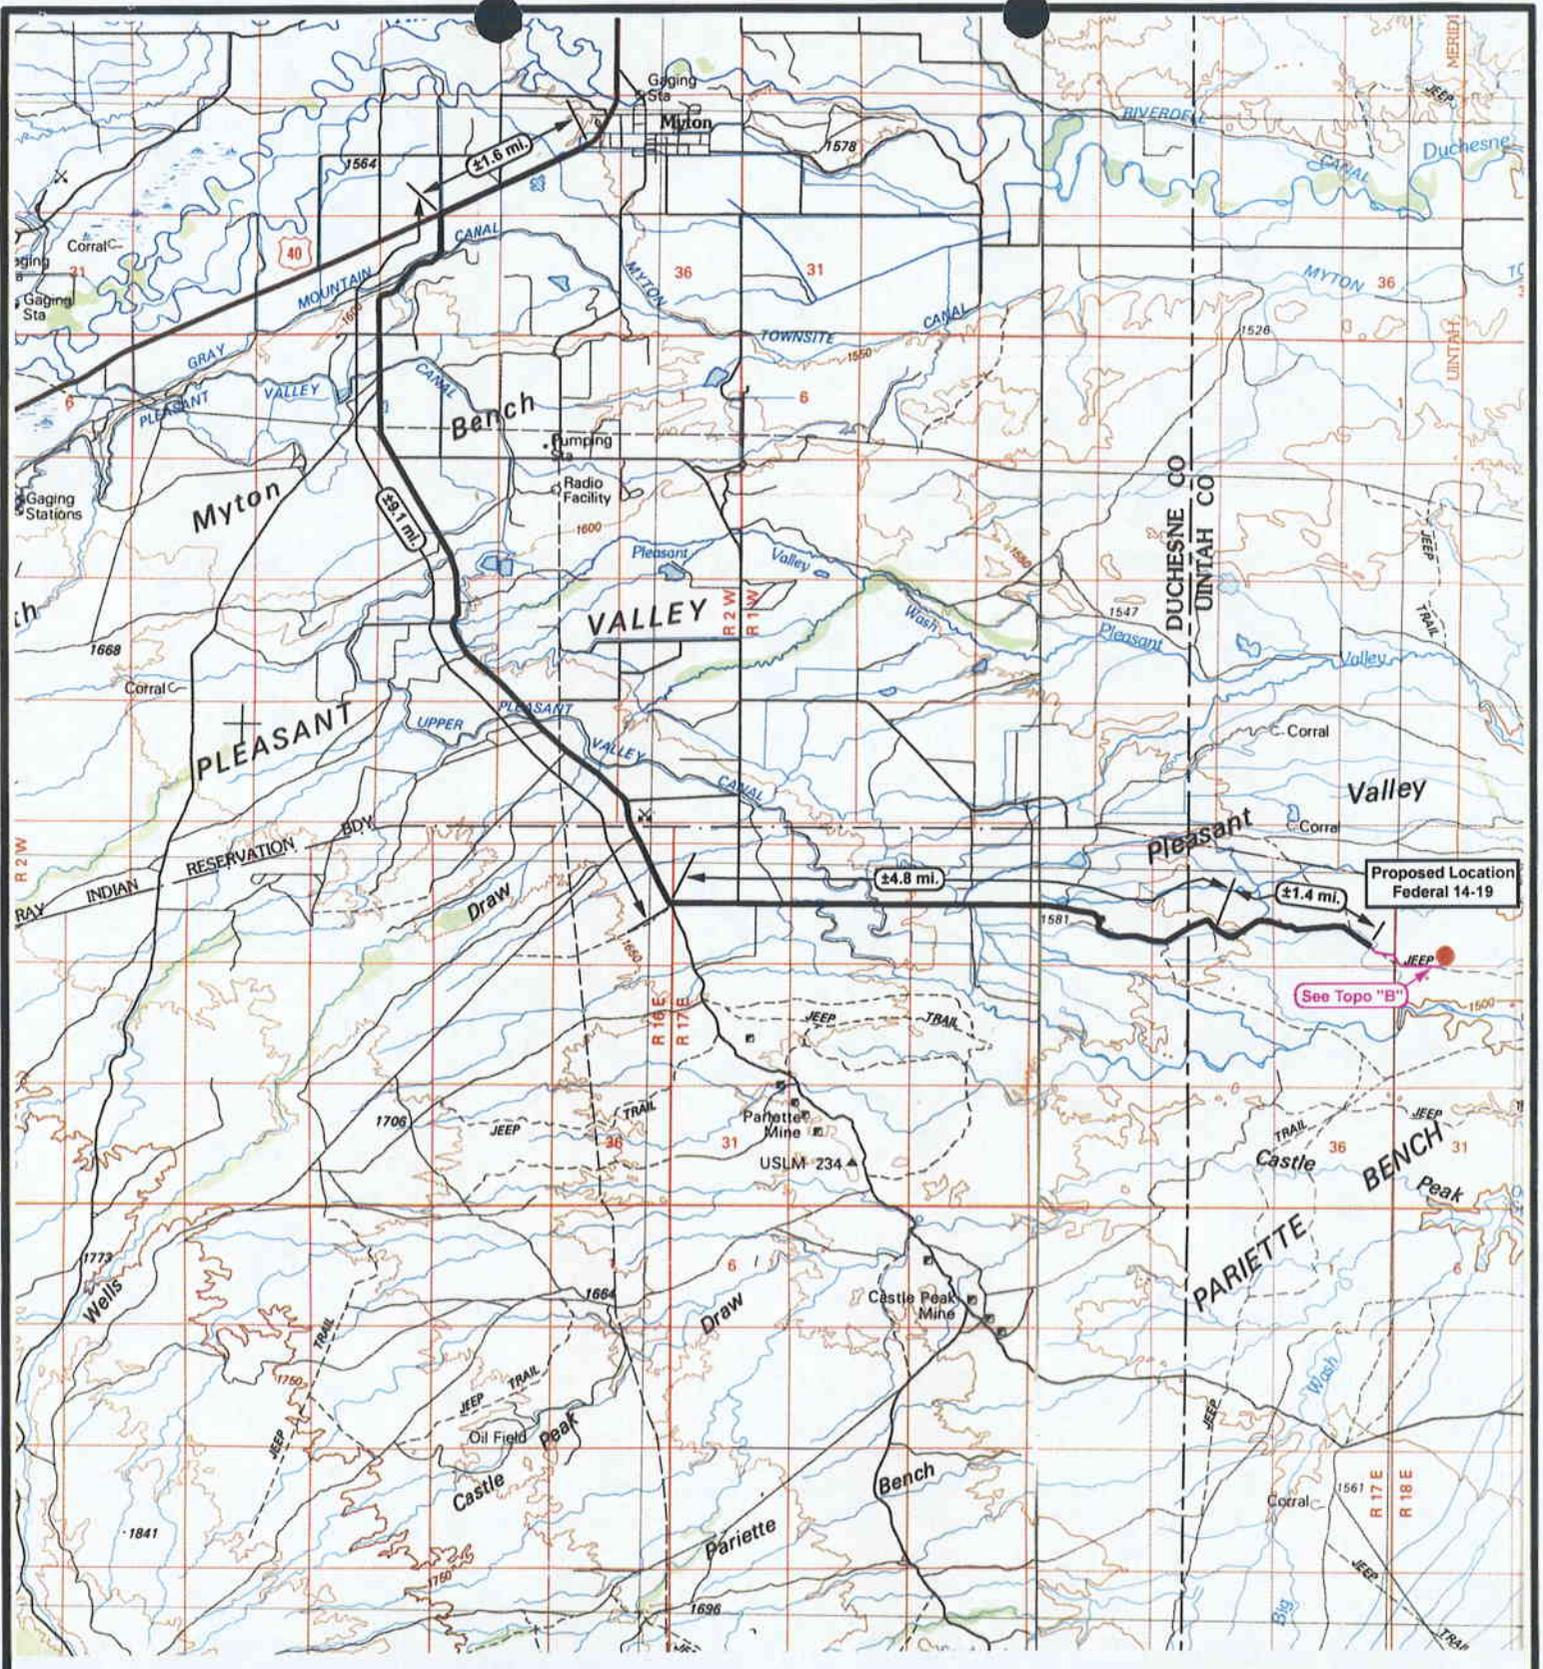



NEWFIELD
 Exploration Company

Federal Unit 14-19
SEC. 19, T8S, R18E, S.L.B.&M.





Tri-State
Land Surveying Inc.
 (435) 781-2501
 38 West 100 North Vernal, Utah 84078

SCALE: 1" = 100,000'
 DRAWN BY: MW
 DATE: 11-11-2004

Legend

 Existing Road
 Proposed Access

TOPOGRAPHIC MAP
"A"

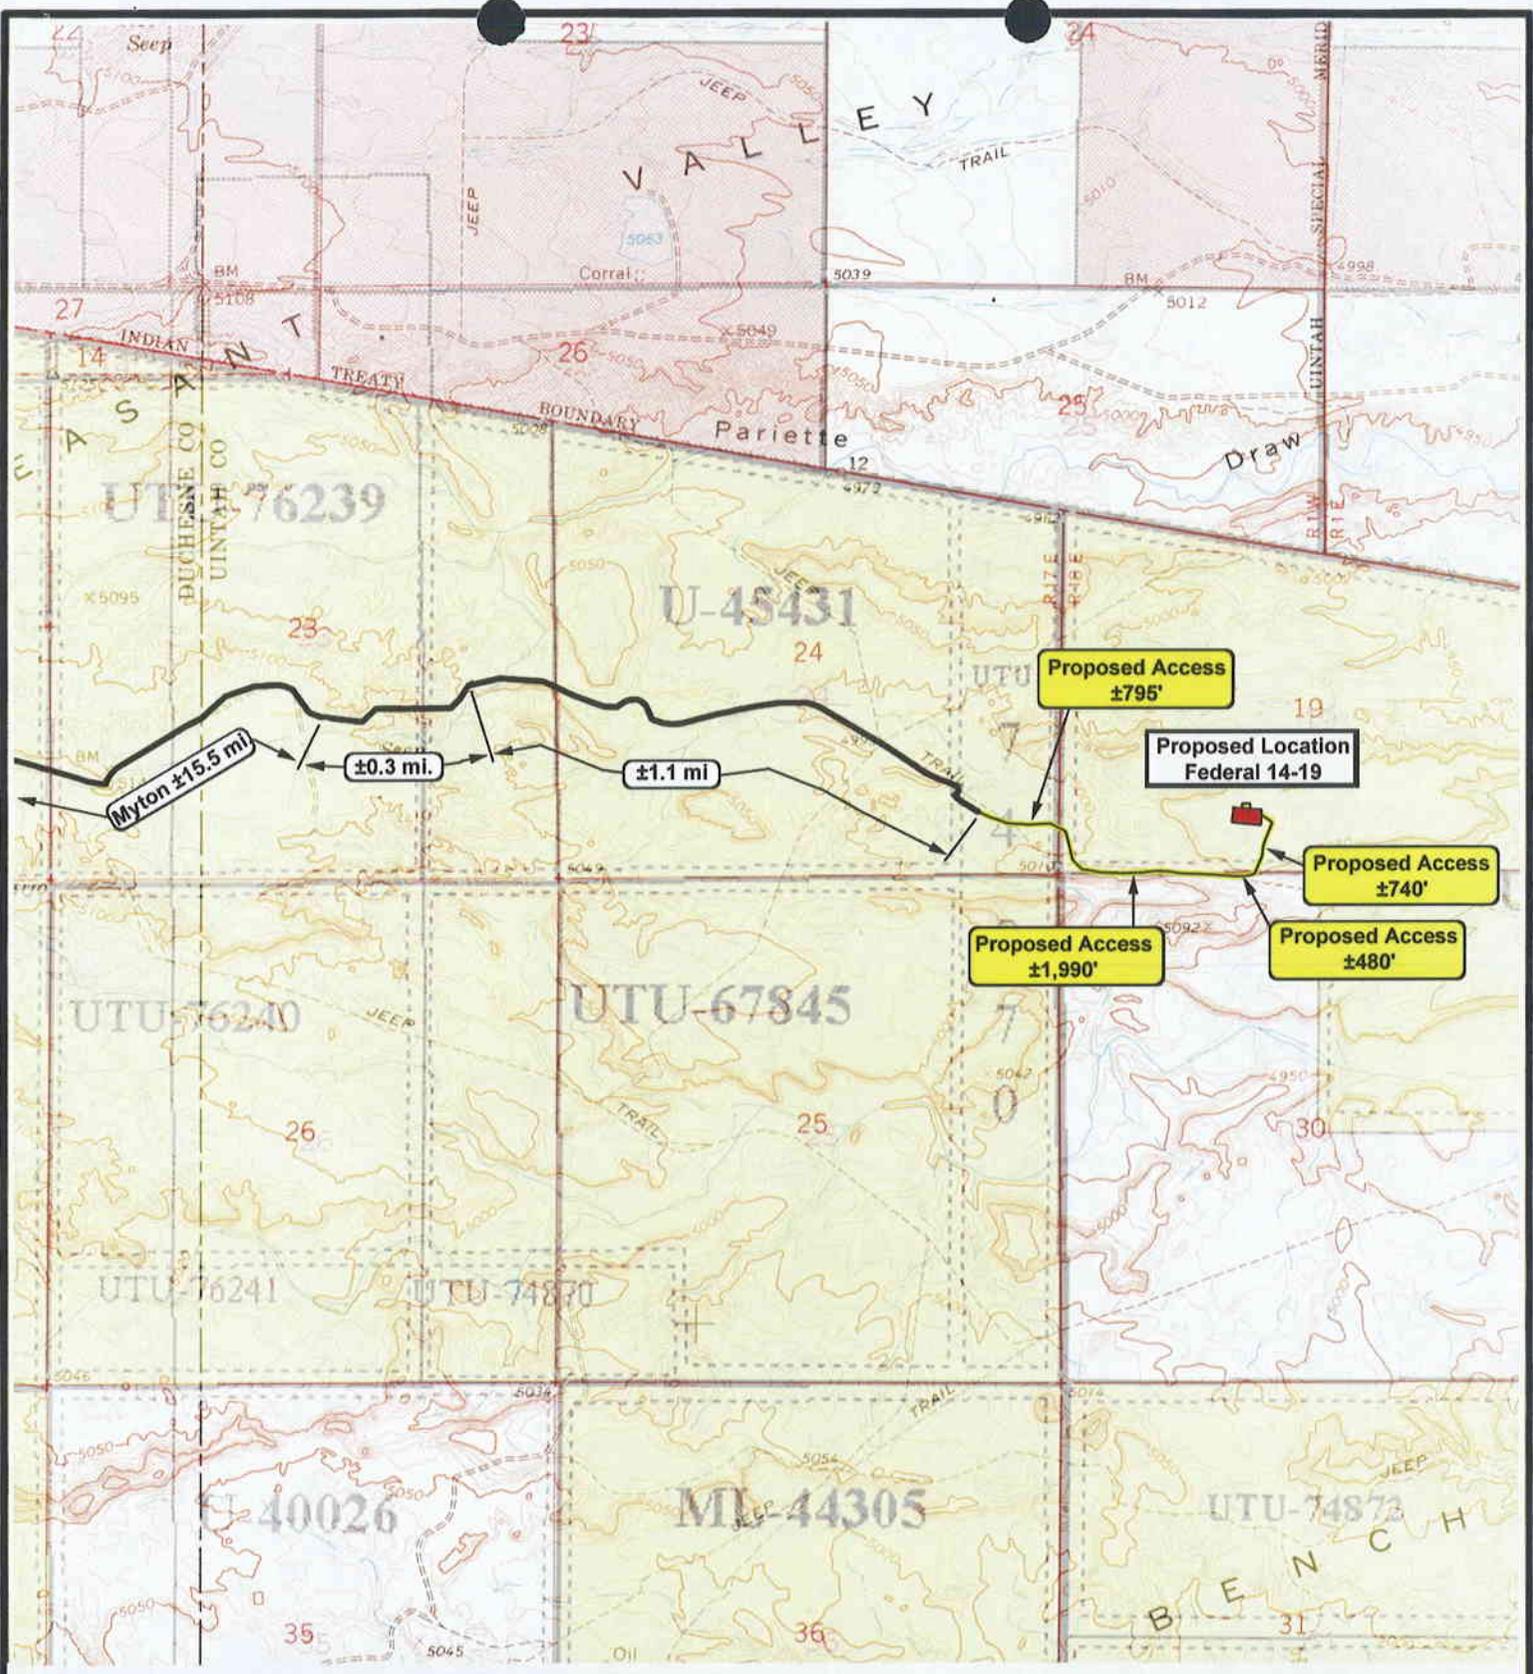

NEWFIELD
Exploration Company

Federal Unit 14-19
SEC. 19, T8S, R18E, S.L.B.&M.




Tri-State
Land Surveying Inc.
(435) 781-2501
38 West 100 North Vernal, Utah 84078

SCALE: 1" = 2000"
DRAWN BY: MW
DATE: 11-11-2004

Legend

- Existing Road
- Proposed Access

TOPOGRAPHIC MAP
"B"

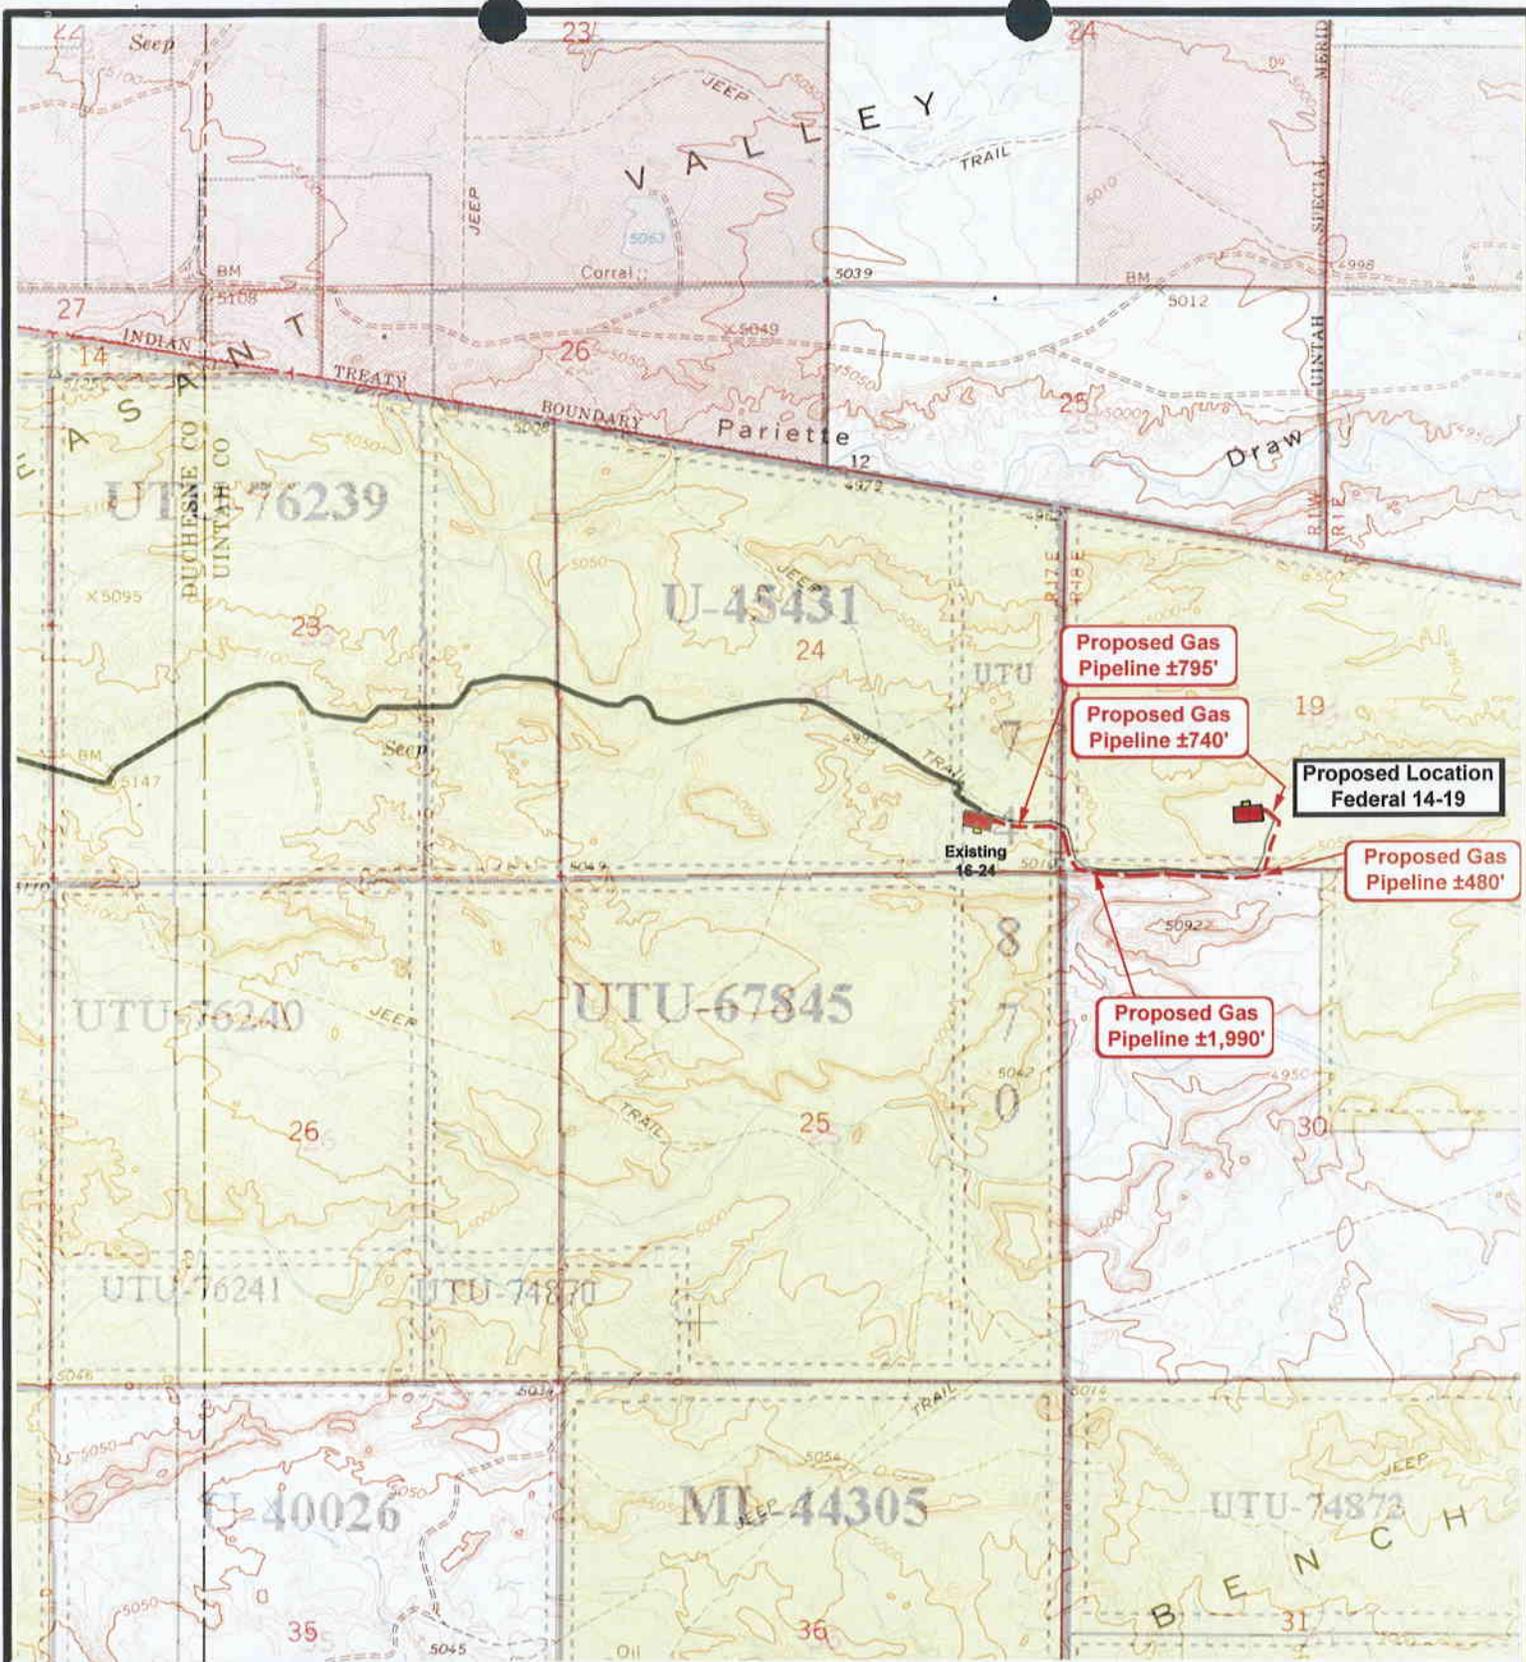


NEWFIELD
 Exploration Company

Federal Unit 14-19
SEC. 19, T8S, R18E, S.L.B.&M.




Tri-State
 Land Surveying Inc.
 (435) 781-2501
 38 West 100 North Vernal, Utah 84078


SCALE: 1" = 2000"
DRAWN BY: MW
DATE: 11-11-2004

Legend

-  Roads
-  Existing Gas Line
-  Proposed Gas Line

TOPOGRAPHIC MAP
"C"

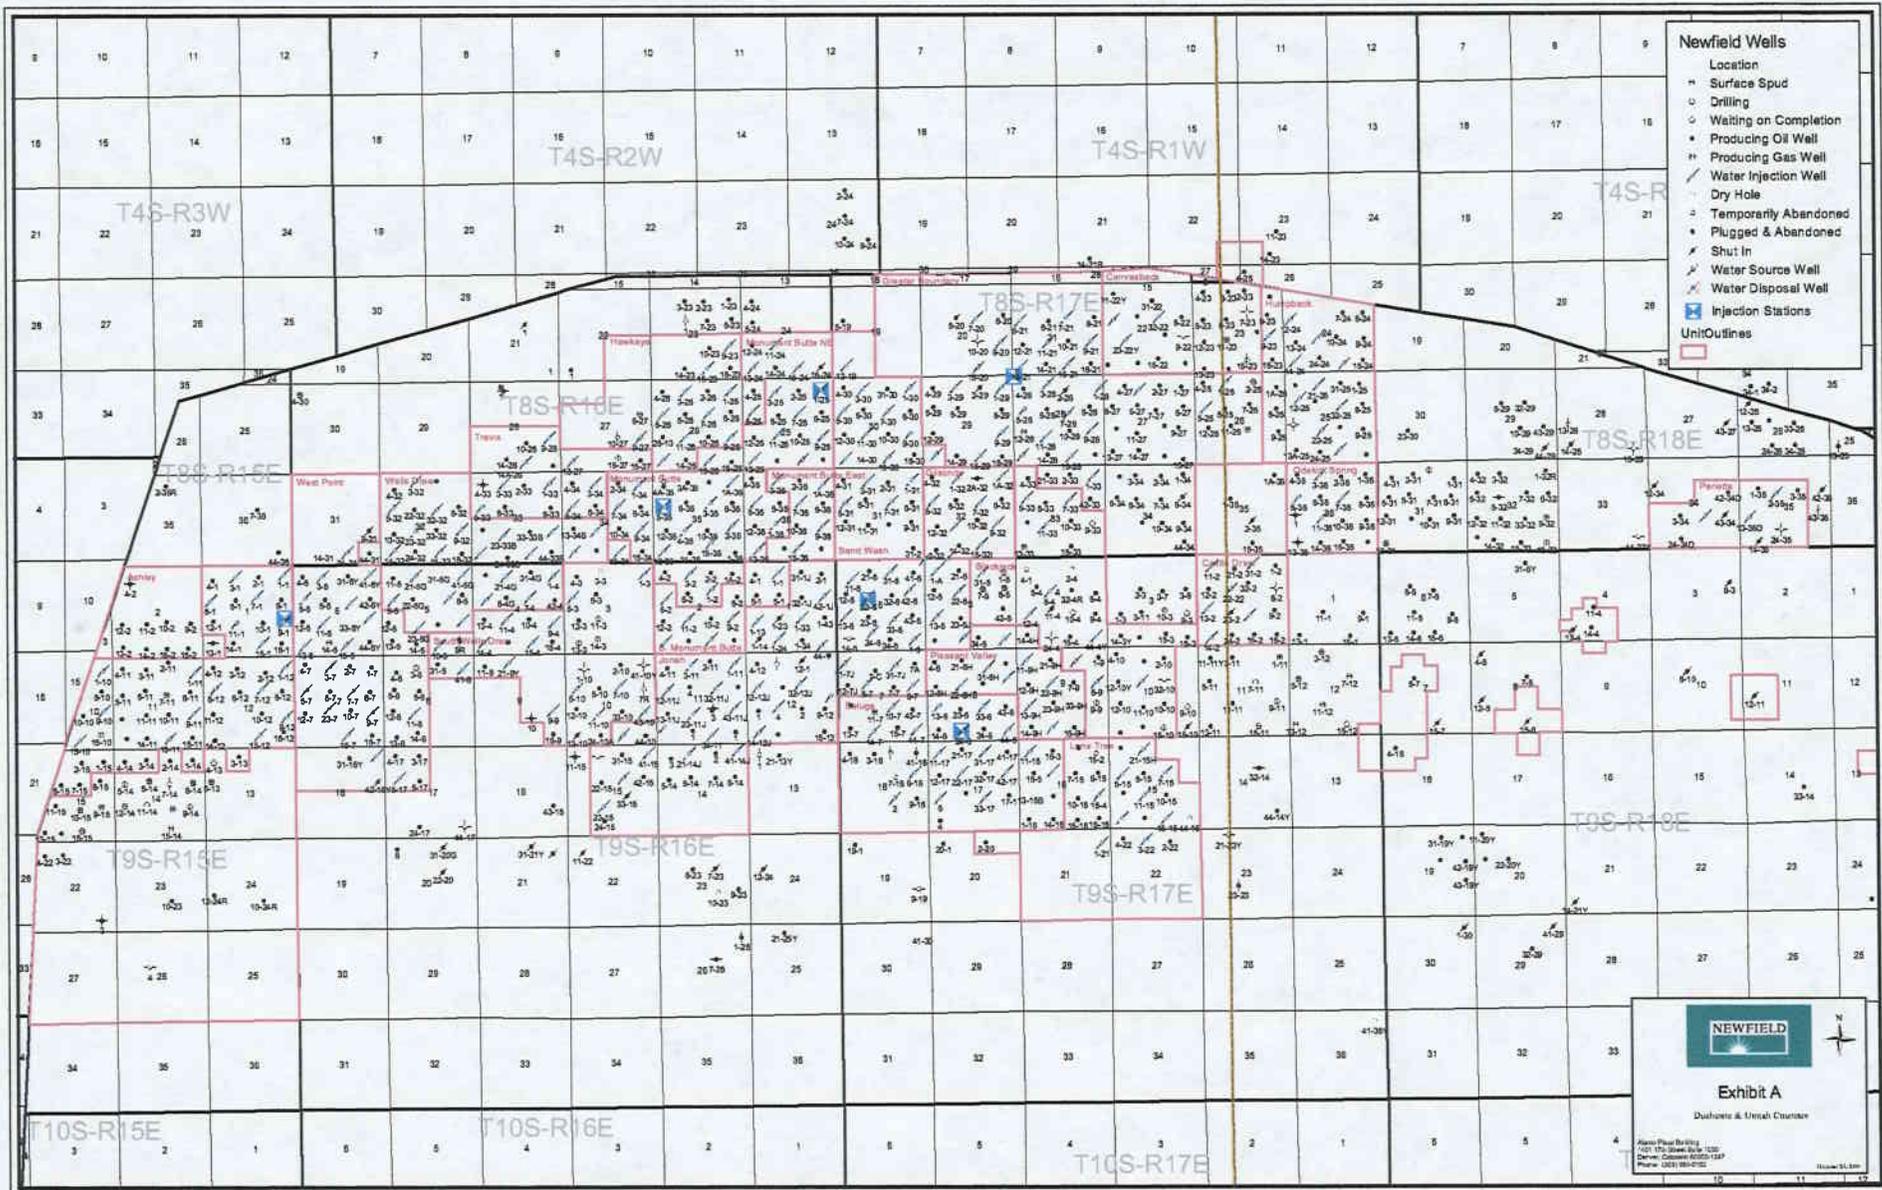

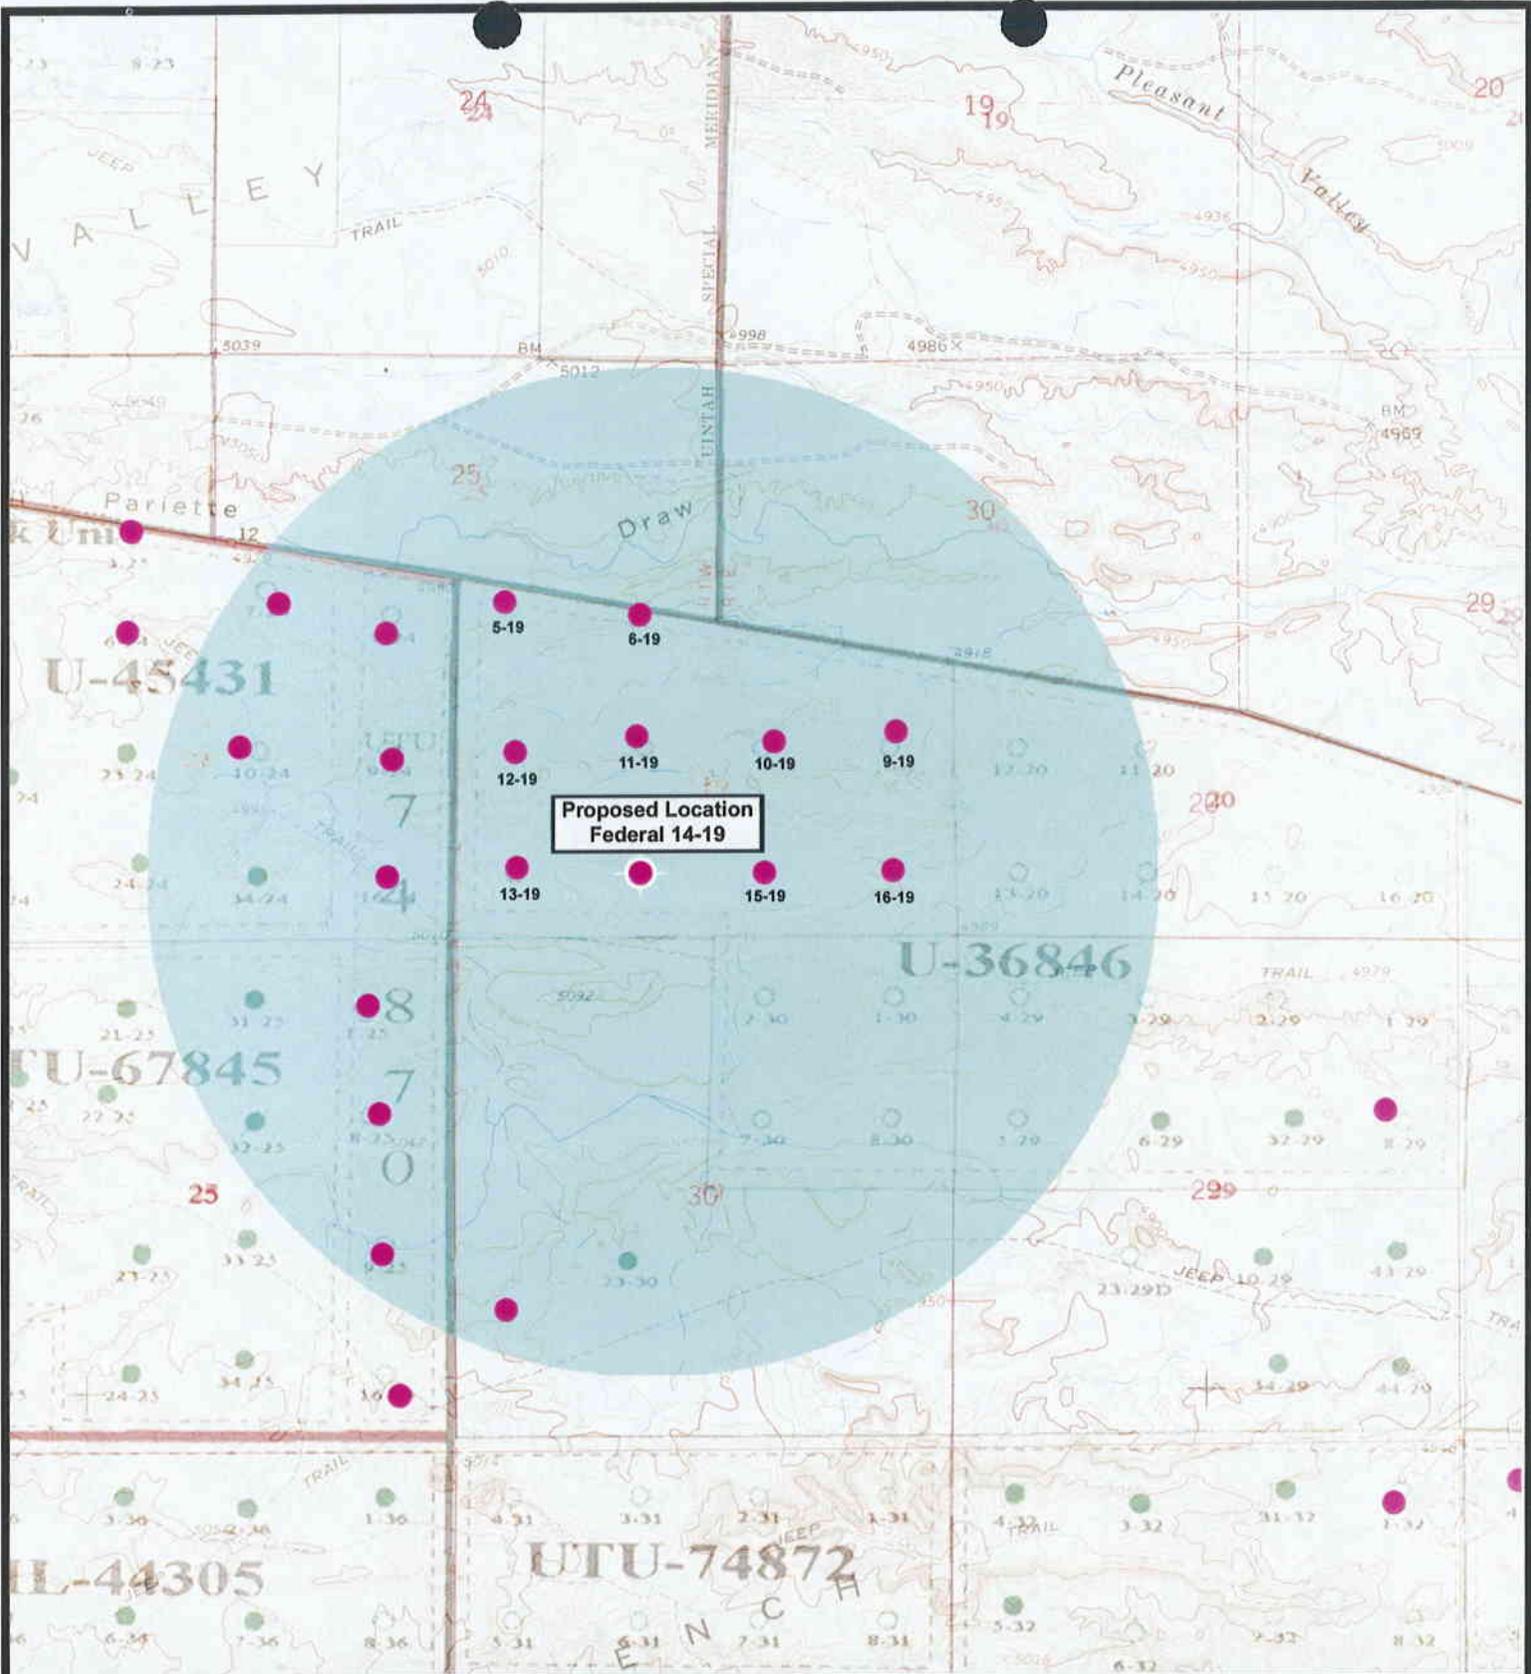

Proposed Location
Federal 14-19



Federal Unit 14-19
SEC. 19, T8S, R18E, S.L.B.&M.



Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2000'
DRAWN BY: MW
DATE: 11-10-2004

Legend

- Well Locations
- One-Mile Radius

Exhibit "B"

2-M SYSTEM

Blowout Prevention Equipment Systems

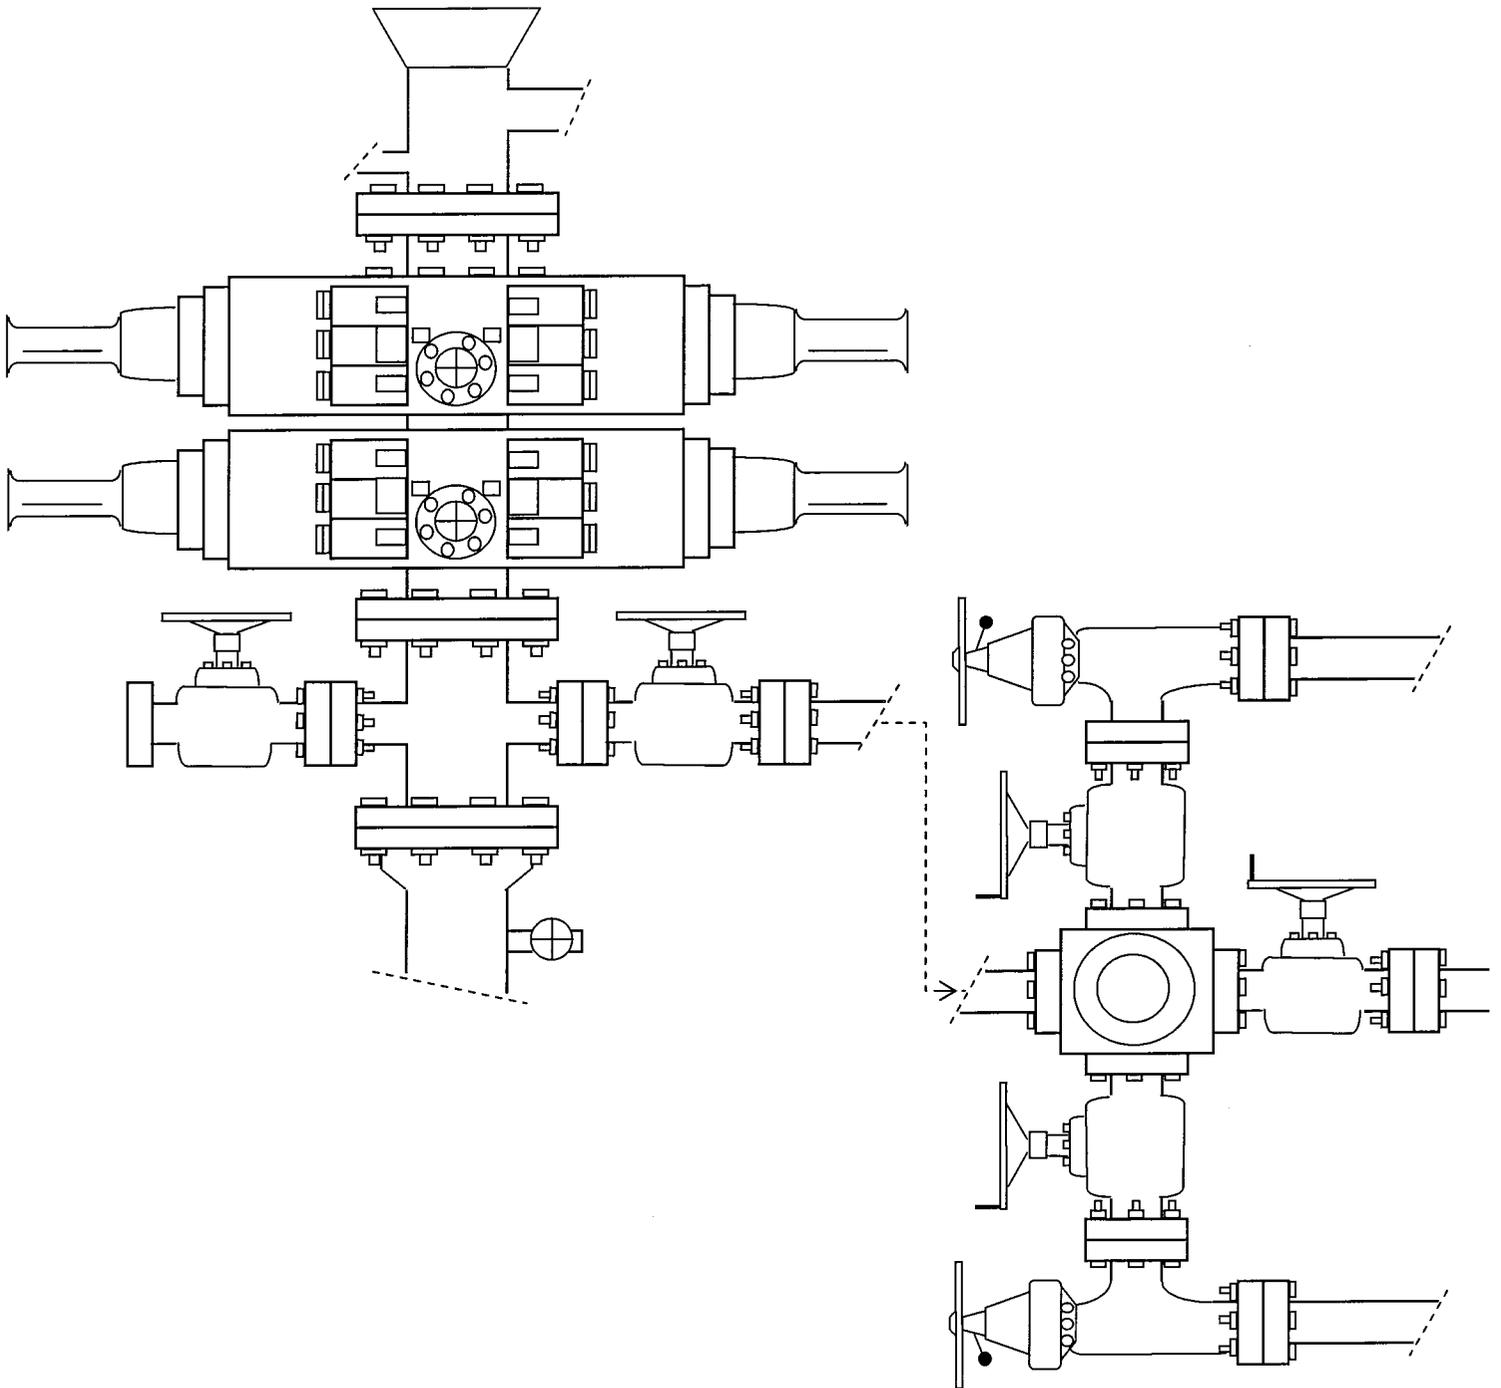


EXHIBIT C

NEWFIELD PRODUCTION COMPANY

**PALEONTOLOGICAL FIELD SURVEY OF PROPOSED
PRODUCTION DEVELOPMENT AREAS,
UINTAH COUNTY, UTAH**

(SW 1/4 & SE 1/4, NW 1/4 + South 1/2 Section 19; South 1/2 Section 20
[excluding NE 1/4, SE 1/4]; NE 1/4, NW 1/4 & SE 1/4, NE 1/4; NE 1/4,
NW 1/4 & SW 1/4, NW 1/4; NW 1/4, SW 1/4 & SE 1/4, SW 1/4, Section 29;
Section 30 [excluding NE 1/4, SW 1/4], Township 8 South, Range 18 East)

REPORT OF SURVEY

Prepared for:

Newfield Production Company

Prepared by:

Wade E. Miller
Consulting Paleontologist
September 27, 2004

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 12/20/2004

API NO. ASSIGNED: 43-047-36192

WELL NAME: FEDERAL 14-19-8-18

OPERATOR: NEWFIELD PRODUCTION (N2695)

CONTACT: MANDIE CROZIER

PHONE NUMBER: 435-646-3721

PROPOSED LOCATION:

SESW 19 080S 180E
SURFACE: 0659 FSL 1979 FWL
BOTTOM: 0659 FSL 1979 FWL
UINTAH
8 MILE FLAT NORTH (590)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-36846

SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: GRRV

COALBED METHANE WELL? NO

LATITUDE: 40.09813

LONGITUDE: -109.9377

RECEIVED AND/OR REVIEWED:


- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. UTU0056)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. MUNICIPAL)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)

LOCATION AND SITING:

- R649-2-3.
- Unit _____
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: _____
Eff Date: _____
Siting: _____
- R649-3-11. Directional Drill

COMMENTS: See Separate File

STIPULATIONS: 1 - Federal Approval
2 - Spacing Strip

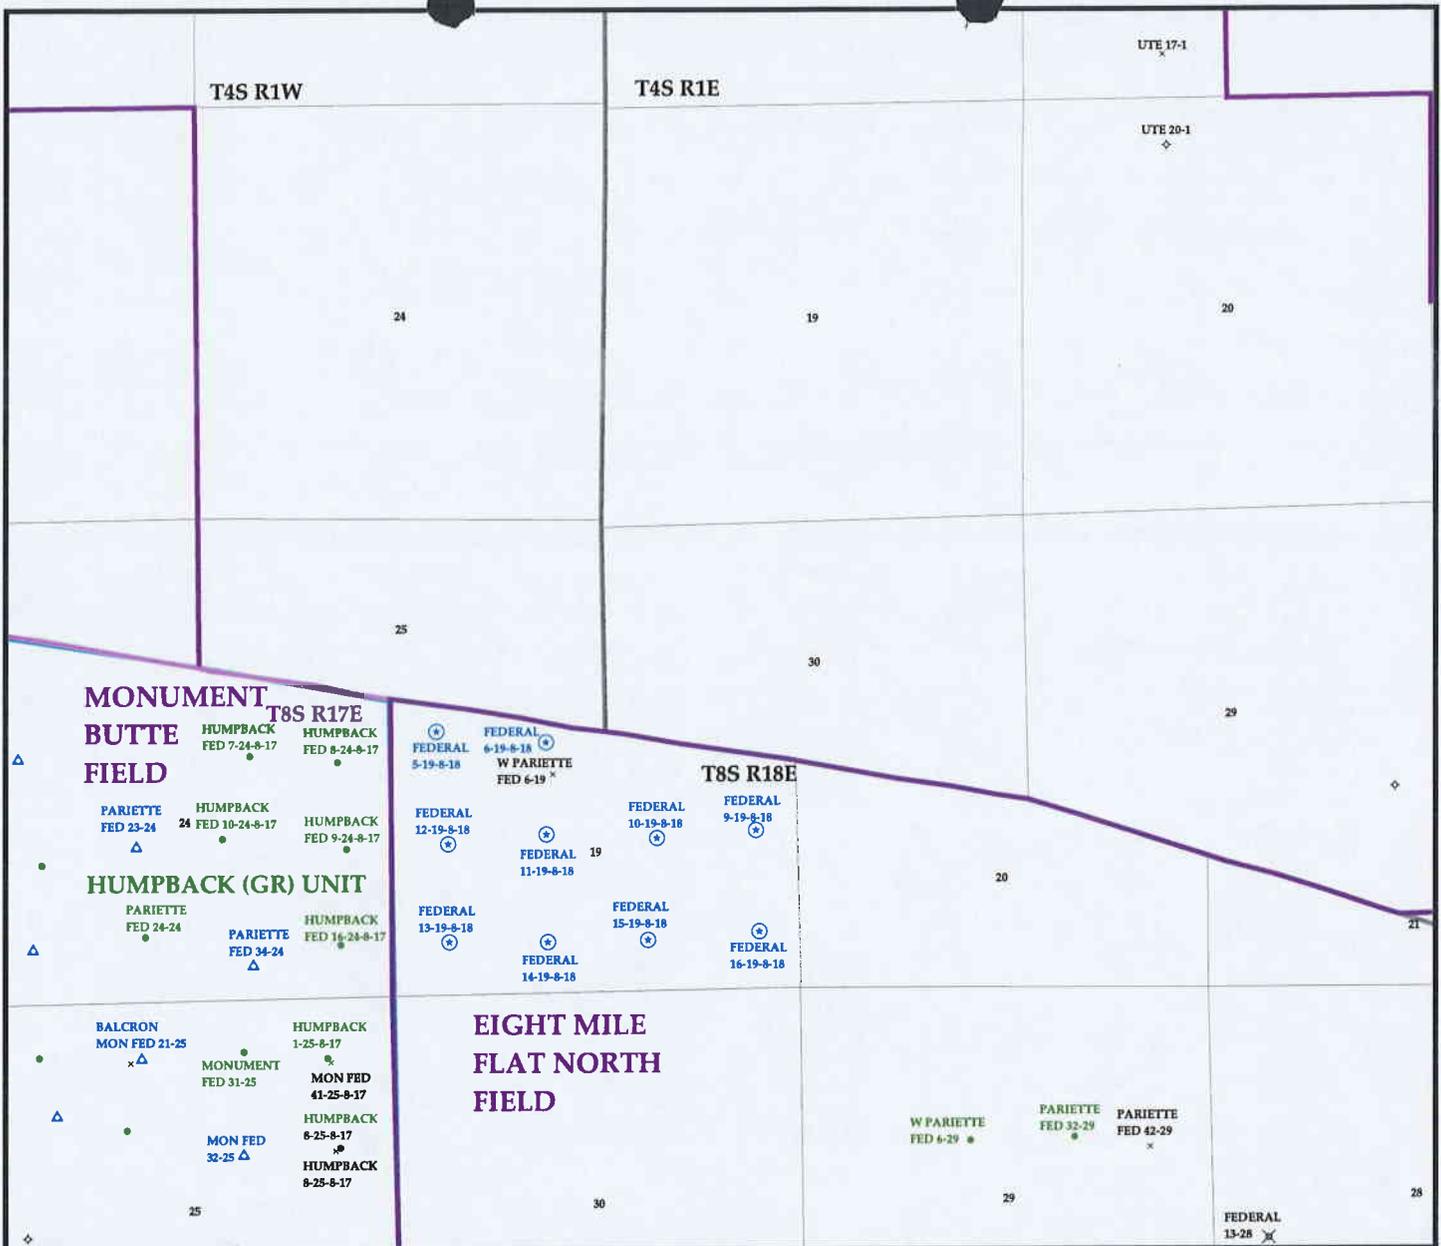


OPERATOR: NEWFIELD PROD CO (N2695)

SEC. 19 T.8S R.18E

FIELD: EIGHT MILE FLAT NORTH (590)

COUNTY: UINTAH**

SPACING: R649-3-2 / GENERAL SITING

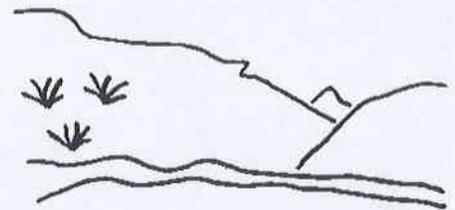

Utah Oil Gas and Mining



PREPARED BY: DIANA WHITNEY
DATE: 27-DECEMBER-2004

Wells	Units.shp	Fields.shp
☆ GAS INJECTION	□ EXPLORATORY	□ ABANDONED
☆ GAS STORAGE	□ GAS STORAGE	□ ACTIVE
× LOCATION ABANDONED	□ NF PP OIL	□ COMBINED
⊕ NEW LOCATION	□ NF SECONDARY	□ INACTIVE
⊕ PLUGGED & ABANDONED	□ PENDING	□ PROPOSED
* PRODUCING GAS	□ PI OIL	□ STORAGE
● PRODUCING OIL	□ PP GAS	□ TERMINATED
⊖ SHUT-IN GAS	□ PP GEOTHERML	
⊖ SHUT-IN OIL	□ PP OIL	
× TEMP. ABANDONED	□ SECONDARY	
○ TEST WELL	□ TERMINATED	
△ WATER INJECTION		
◆ WATER SUPPLY		
♣ WATER DISPOSAL		



State of Utah

Department of
Natural Resources

ROBERT L. MORGAN
Executive Director

Division of
Oil, Gas & Mining

MARY ANN WRIGHT
Acting Division Director

OLENE S. WALKER
Governor

GAYLE F. McKEACHNIE
Lieutenant Governor

December 27, 2004

Newfield Production Company
Rt. #3, Box 3630
Myton, UT 84052

Re: Federal 14-19-8-18 Well, 659' FSL, 1979' FWL, SE SW, Sec. 19, T. 8 South,
R. 18 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-36192.

Sincerely,


(for) John R. Baza
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: Newfield Production Company

Well Name & Number Federal 14-19-8-18

API Number: 43-047-36192

Lease: UTU-36846

Location: SE SW Sec. 19 T. 8 South R. 18 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry a different reservoir.
Use "APPLICATION FOR PERMIT -" for such proposals

5. Lease Designation and Serial No.
UTU-36846

6. If Indian, Allottee or Tribe Name
NA

7. If Unit or CA, Agreement Designation
N/A

SUBMIT IN TRIPLICATE

1. Type of Well
 Oil Well Gas Well Other

8. Well Name and No.
FEDERAL 14-19-8-18

2. Name of Operator
NEWFIELD PRODUCTION COMPANY

9. API Well No.
43-047-36192

3. Address and Telephone No.
Rt. 3 Box 3630, Myton Utah, 84052 435-646-3721

10. Field and Pool, or Exploratory Area
8 MILE FLAT NORTH

4. Location of Well (Footage, Sec., T., R., m., or Survey Description)
659 FSL 1979 FWL SE/SW Section 19, T8S R18E

11. County or Parish, State
UINTAH COUNTY, UT.

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- Notice of Intent
- Subsequent Report
- Final Abandonment Notice

TYPE OF ACTION

- Abandonment
- Recompletion
- Plugging Back
- Casing Repair
- Altering Casing
- Other **Permit Extension**
- Change of Plans
- New Construction
- Non-Routine Fracturing
- Water Shut-Off
- Conversion to Injection
- Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Newfield Production Company requests to extend the Permit to Drill this well for one year. The original approval date was 12/27/04 (expiration 12/27/05).

This APD has not been approved yet by the BLM.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: 12-01-05
By: [Signature]

CONSENT TO OPERATE

Date: 12-2-05
Initials: CHD

14. I hereby certify that the foregoing is true and correct

Signed Mandie Crozier Title Regulatory Specialist Date 11/29/2005

CC: UTAH DOGM

(This space for Federal or State office use)

Approved by _____ Title _____

Conditions of approval, if any:

CC: Utah DOGM

RECEIVED
NOV 30 2005

RESET

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-36192
Well Name: Federal 14-19-8-18
Location: SE/SW Section 19, T8S R18E
Company Permit Issued to: Newfield Production Company
Date Original Permit Issued: 12/27/2004

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No NA

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

Mandi Cozjin
Signature

12/6/2005
Date

Title: Regulatory Specialist

Representing: Newfield Production Company

RECEIVED
NOV 30 2005
DIV. OF OIL, GAS & MINING

DEC 20 2004

Form 3160-3
(September 2001)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0136
Expires January 31, 2004

5. Lease Serial No.
UTU-36846

6. If Indian, Allottee or Tribe Name
N/A

7. If Unit or CA Agreement, Name and No.
N/A

8. Lease Name and Well No.
Federal 14-19-8-18

9. API Well No.
43,047,36192

10. Field and Pool, or Exploratory
Eight Mile Flat

11. Sec., T., R., M., or Blk. and Survey or Area
SE/SW Sec. 19, T8S R18E

12. County or Parish
Uintah

13. State
UT

1a. Type of Work: DRILL REENTER

1b. Type of Well: Oil Well Gas Well Other Single Zone Multiple Zone

2. Name of Operator
Newfield Production Company

3a. Address
Route #3 Box 3630, Myton UT 84052

3b. Phone No. (include area code)
(435) 646-3721

4. Location of Well (Report location clearly and in accordance with any State requirements. *)
At surface SE/SW 659' FSL 1979' FWL
At proposed prod. zone

14. Distance in miles and direction from nearest town or post office*
Approximatley 16.9 miles southeast of Myton, Utah

15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) Approx. 659' f/lse, NA f/unit

16. No. of Acres in lease
1178.69

17. Spacing Unit dedicated to this well
40 Acres

18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 1290'

19. Proposed Depth
6360'

20. BLM/BIA Bond No. on file
UTU0056

21. Elevations (Show whether DF, KDB, RT, GL, etc.)
5069' GL

22. Approximate date work will start*
2nd Quarter 2005

23. Estimated duration
Approximately seven (7) days from spud to rig release.

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:

- 1. Well plat certified by a registered surveyor.
- 2. A Drilling Plan.
- 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- 5. Operator certification.
- 6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature *Mandie Crozier* Name (Printed/Typed) Mandie Crozier Date 12/17/04
Title Regulatory Specialist

Approved by (Signature) *Thomas B. Cleary* Name (Printed/Typed) Office Date 02/13/2006
Title Assistant Field Manager Mineral Resources

Application approval does not warrant or certify the the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

RECEIVED
FEB 17 2006

4006m
NOTICE OF APPROVAL

DIV. OF OIL, GAS & MINING
CONDITIONS OF APPROVAL ATTACHED

05JMO301A

No. 108



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East VERNAL, UT 84078 (435) 781-4400



**CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO
DRILL**

Company: NEWFIELD PRODUCTION CO **Location:** SESW Sec.19, T8S, R18E
Well No: Federal 14-19-8-18 **Lease No:** UTU-36846
API No: 43-047-36192 **Agreement:** N/A

Petroleum Engineer:	Matt Baker	Office: 435-781-4490	Cell: 435-828-4470
Petroleum Engineer:	Michael Lee	Office: 435-781-4432	Cell: 435-828-7875
Supervisory Petroleum Technician:	Jamie Sparger	Office: 435-781-4502	Cell: 435-828-3913
Environmental Scientist:	Paul Buhler	Office: 435-781-4475	Cell: 435-828-4029
Environmental Scientist:	Karl Wright	Office: 435-781-4484	
Natural Resource Specialist:	Holly Villa	Office: 435-781-4404	
Natural Resource Specialist:	Melissa Hawk	Office: 435-781-4476	
Office Fax: (435) 781-4410	After hours message number: (435) 781-4513		

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a one-year period. An additional year extension may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

- Location Construction (Notify Melissa Hawk ES / NRS) - Forty-Eight (48) hours prior to construction of location and access roads.
- Location Completion (Notify Melissa Hawk ES / NRS) - Prior to moving on the drilling rig.
- Spud Notice (Notify PE) - Twenty-Four (24) hours prior to spudding the well.
- Casing String & Cementing (Notify Jamie Sparger SPT) - Twenty-Four (24) hours prior to running casing and cementing all casing strings.
- BOP & Related Equipment Tests (Notify Jamie Sparger SPT) - Twenty-Four (24) hours prior to initiating pressure tests.
- First Production Notice (Notify PE) - Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

-This well is being approved in accordance with Washington Instruction Memorandum 2005-247 and Section 390 (Category 3) of the Energy Policy Act which establishes statutory categorical exclusions (CX) under the National Environmental Policy Act (NEPA). Category 3 states that an oil or gas well can be drilled within a developed field for which an approved land use plan or any environmental document prepared pursuant to NEPA analyzed drilling as a reasonably foreseeable activity, so long as such plan or document was approved within five (5) years prior to the date of spudding the well. This well is covered under the *Final Environmental Impact Statement and Record of Decision Castle Peak and Eightmile Flat Oil and Gas Exploration Project Newfield Rocky Mountains Inc.*, signed November 21, 2005. If the well has not been spudded by November 21, 2010, a new environmental document will have to be prepared prior to the approval of the APD.

-No construction or drilling will be allowed during the golden eagle nesting season (2-1 to 7-15), unless a clearance is given by the Vernal Field Office wildlife biologist. If the nest is found to be active or was active in the previous year, no drilling will be allowed until the nest has been inactive for two consecutive years.

-A qualified archeologist shall be present to monitor the construction of the access road. If the archeologist determines that any archeological sites would be destroyed which are of historical importance, the operator shall immediately stop work that might further disturb such materials and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation will be necessary for the discovered archeological material.

-If paleontologic materials are uncovered during construction, the operator shall immediately stop work that might further disturb such materials and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation will be necessary for the discovered paleontologic material.

-4 to 6 inches of topsoil shall be stripped from the location and placed where it can most easily be accessed for interim reclamation instead of as shown in the APD.

-Within 90 calendar days of the approval date for this Application for Permit to Drill (APD), the operator/lessee shall submit to the Authorized Officer (AO), on Sundry Notice Form 3160-5, an Interim Surface Reclamation Plan for surface disturbance on well Pads, access roads, and pipelines. At a minimum, this will include the reshaping of the pad to the original contour to the extent possible; the respreading of the topsoil up to the rig anchor points; and the area reseeded using appropriate reclamation methods. The AO will provide written approval or concurrence within 30 calendar days of receipt.

-The pipeline(s) shall be buried within the identified construction width of an access corridor that contains the access road and pipelines. The operator may request in writing an exception to this COA. Exceptions to this COA may include but are not limited to: laterally extensive, hard indurated bedrock, such as sandstone, which is at or within 2 feet of the surface; and soil types with a poor history for successful rehabilitation. The exception request will be reviewed by the AO and a determination made.

- Following well plugging and abandonment, the location, access roads, pipelines, and other facilities shall be reclaimed. All disturbed surfaces shall be reshaped to approximate the original contour; the top soil respread over the surface; and the surface revegetated. The surface of approved staging areas where construction activities did not occur may require disking or ripping and reseeding.

-Prior to abandonment of a buried pipeline, the operator will obtain authorization from the appropriate regulatory agency. BLM will determine whether the pipeline and all above ground pipeline facilities

shall be removed and unsalvageable materials disposed of at approved sites or abandoned in place. Reshaping and revegetation of disturbed land areas will be completed where necessary. The seed mix identified in the APD shall be used. Other reclamation methods including but not limited to mulching or soil treatments may be require on a site-specific basis.

DOWNHOLE CONDITIONS OF APPROVAL

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

SITE SPECIFIC DOWNHOLE CONDITIONS OF APPROVAL

1. Casing cementing operations for production casing shall return cement to surface.

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

1. There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well. Any changes in operation must have prior approval from the BLM, Vernal Field Office Petroleum Engineers.
2. The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
3. **Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.**
4. Blowout prevention equipment (BOPE) will remain in use until the well is completed or abandoned. Closing unit controls must remain unobstructed and readily accessible at all times. Choke manifolds must be located outside of the rig substructure.

All BOPE components will be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests must be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test must be reported in the driller's log.

BOP drills must be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.

Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.

No aggressive/fresh hard-banded drill pipe shall be used within casing.

5. All shows of fresh water and minerals will be reported and protected. A sample will be taken of any water flows and a water analysis furnished the BLM, Vernal Field Office. All oil and gas shows will be adequately tested for commercial possibilities, reported, and protected.
6. No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the BLM, Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM, Vernal Field Office must be obtained and notification given before resumption of operations.

7. Chronologic drilling progress reports must be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.

Any change in the program must be approved by the BLM, Vernal Field Office. "Sundry Notices and Reports on Wells" (Form BLM 3160-5) must be filed for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Emergency approval may be obtained orally, but such approval does not waive the written report requirement. Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, will require the filing of a suitable plan pursuant to Onshore Oil & Gas Order No. 1 of 43 CFR 3164.1 and prior approval by the BLM, Vernal Field Office.

In accordance with 43 CFR 3162.4-3, this well must be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.

8. Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) will be submitted only when requested by the BLM, Vernal Field Office.

Please submit an electronic copy of all logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM. The cement bond log must be submitted in raster format (TIF, PDF other).

9. All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the BLM, Vernal Field Office.

All measurement points shall be identified as point of sales or allocation for royalty determination prior to the installation of facilities.

10. Oil and gas meters will be calibrated in place prior to any deliveries. The Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the BLM, Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement.

11. A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM, Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
12. This APD is approved subject to the requirement that, should the well be successfully completed for production, the BLM, Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - a. Operator name, address, and telephone number.
 - b. Well name and number.
 - c. Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - d. Date well was placed in a producing status (date of first production for which royalty will be paid).
 - e. The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - f. The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - g. Unit agreement and / or participating area name and number, if applicable.
 - h. Communitization agreement number, if applicable.
13. Any venting or flaring of gas will be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from Field Office Petroleum Engineers.
14. All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events as defined in NTL3A, will be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production
15. Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.

16. Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

Name of Company: NEWFIELD PRODUCTION COMPANY

Well Name: FEDERAL 14-19-8-18

Api No: 43-047-36192 Lease Type: FEDERAL

Section 19 Township 08S Range 18E County UINTAH

Drilling Contractor NDSI RIG # NS#1

SPUDDED:

Date 03/17/06

Time 10:00 AM

How DRY

Drilling will Commence: _____

Reported by FLOYD MITCHELL

Telephone # 1-435-823-3610

Date 03/17/2006 Signed CHD

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING
ENTITY ACTION FORM - FORM 6

OPERATOR: NEWFIELD PRODUCTION COMPANY
ADDRESS: RT. 3 BOX 3638
MYTON, UT 84062

OPERATOR ACCT. NO. N2695

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
B	99999	14844	43-047-36026	FEDERAL 15-33-8-18	SW8E	33	8S	18E	UINTAH	03/15/06	3/23/06
WELL 1 COMMENTS: <i>GRRV Sundance</i> — K											
A	99999	15258	43-047-36192	FEDERAL 14-19-8-18	SE8W	19	8S	18E	UINTAH	03/18/06	3/23/06
WELL 2 COMMENTS: <i>GRRV</i> — K											
B	99999	14844	43-047-36346	FEDERAL 8-8-9-18	SE/NE	8	9S	18E	UINTAH	03/18/06	3/23/06
WELL 3 COMMENTS: <i>GRRV Sundance</i> — K											
A	99999	15259	43-047-36193	FEDERAL 15-19-8-18	SWSE	19	8S	18E	UINTAH	03/20/06	3/23/06
WELL 4 COMMENTS: <i>GRRV</i> — K											
B	99999	14844	43-047-36345	FEDERAL 9-8-9-18	NE8E	8	9S	18E	UINTAH	03/21/06	3/23/06
WELL 5 COMMENTS: <i>GRRV Sundance</i> — K											
A	99999	15260	43-047-36226	FEDERAL 4-30-8-18	NW/NW	30	8S	18E	UINTAH	03/21/06	3/23/06
WELL 6 COMMENTS: <i>GRRV</i> — K											

ACTION CODES (See instructions on back of form)

- A - Establish a new entity for new well (single well only)
- B - Add new well to existing entity (group or well well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (specify in comment section)

NOTE: Use COMMENTS section to explain why each Action Code was selected.

RECEIVED
MAR 23 2006

Lana Nebeker
Signature
Production Clerk
March 23, 2006
Date

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU36846

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
FEDERAL 14-19-8-18

9. API Well No.
4304736192

10. Field and Pool, or Exploratory Area
Monument Butte

11. County or Parish, State
Uintah, UT

SUBMIT IN TRIPLICATE - Other Instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
NEWFIELD PRODUCTION COMPANY

3a. Address Route 3 Box 3630
Myton, UT 84052

3b. Phone No. (include are code)
435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
659 FSL 1979 FWL
SE/SW Section 19 T8S R18E

12. CHECK APPROPRIATE BOX(ES) TO INIDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production(Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input checked="" type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Formation water is produced to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E) or at State of Utah approved surface disposal facilities.

**Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY**

I hereby certify that the foregoing is true and correct Name (Printed, Typed) Mandie Crozier	Title Regulatory Specialist
Signature <i>Mandie Crozier</i>	Date 04/21/2006

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office _____	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED
APR 24 2006
DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires January 31, 2004

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU36846

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
FEDERAL 14-19-8-18

9. API Well No.
4304736192

10. Field and Pool, or Exploratory Area
Monument Butte

11. County or Parish, State
Uintah, UT

SUBMIT IN TRIPLICATE - Other Instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
NEWFIELD PRODUCTION COMPANY

3a. Address Route 3 Box 3630 3b. Phone No. (include are code)
 Myton, UT 84052 435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
 659 FSL 1979 FWL
 SE/SW Section 19 T8S R18E

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production(Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Spud Notice
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 3-17-2006 MIRU NDSI NS # 1. Spud well @ 10:00 AM. Drill 310' of 12 1/4" hole with air mist. TIH W/ 7 Jt's 8 5/8" J-55 24 # csgn. Set @ 315.87' / KB On 3-18-2006 cement with 160 sks of class "G" w/ 2% CaCL2 + 1/4# sk Cello- Flake Mixed @ 15.8 ppg > 1.17 cf/ sk yeild. Returned 5.5 bbls cement to pit. WOC.BLM Present for surface Cement Job.

I hereby certify that the foregoing is true and correct	Title
Name (Printed/ Typed) Troy Zufelt	Drilling Foreman
Signature	Date
	03/18/2006

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on reverse)

RECEIVED
MAR 22 2006
DIV. OF OIL, GAS & MINING

NEWFIELD PRODUCTION COMPANY - CASING & CEMENT REPORT

8 5/8 CASING SET AT 315.87

LAST CASING 8 5/8" SET AT 315.87'
 DATUM 12' KB
 DATUM TO CUT OFF CASING _____
 DATUM TO BRADENHEAD FLANGE _____
 TD DRILLER 310' LOGGER _____
 HOLE SIZE 12 1/4

OPERATOR Newfield Production Company
 WELL Federal 14-19-8-18
 FIELD/PROSPECT Monument Butte
 CONTRACTOR & RIG # NDSI NS #1

LOG OF CASING STRING:							
PIECES	OD	ITEM - MAKE - DESCRIPTION	WT / FT	GRD	THREAD	CONDT	LENGTH
		Shoe Joint 40.38'					
		WHI - 92 csg head			8rd	A	0.95
7	8 5/8"	Maverick ST&C csg	24#	J-55	8rd	A	304.02
		GUIDE shoe			8rd	A	0.9
CASING INVENTORY BAL.		FEET	JTS	TOTAL LENGTH OF STRING			305.87
TOTAL LENGTH OF STRING		305.87	7	LESS CUT OFF PIECE			2
LESS NON CSG. ITEMS		1.85		PLUS DATUM TO T/CUT OFF CSG			12
PLUS FULL JTS. LEFT OUT		0		CASING SET DEPTH			315.87
TOTAL		304.02	7	} COMPARE			
TOTAL CSG. DEL. (W/O THRDS)		312.88	7				
TIMING		1ST STAGE					
BEGIN RUN CSG.	Spud	3/17/2006	10:00 AM	GOOD CIRC THRU JOB <u>YES</u>			
CSG. IN HOLE		3/18/2006	10:00 AM	Bbls CMT CIRC TO SURFACE <u>5.5</u>			
BEGIN CIRC		3/18/2006	2:52 PM	RECIPROCATED PIPE FOR <u>N/A</u>			
BEGIN PUMP CMT		3/18/2006	3:02 PM				
BEGIN DSPL. CMT		3/18/2006	3:15 PM	BUMPED PLUG TO <u>480</u> PSI			
PLUG DOWN		3/18/2006	3:24 PM				
CEMENT USED		CEMENT COMPANY- B. J.					
STAGE	# SX	CEMENT TYPE & ADDITIVES					
1	160	Class "G" w/ 2% CaCL2 + 1/4#/sk Cello-Flake mixed @ 15.8 ppg 1.17 cf/sk yield					
CENTRALIZER & SCRATCHER PLACEMENT		SHOW MAKE & SPACING					
Centralizers - Middle first, top second & third for 3							

COMPANY REPRESENTATIVE Troy Zufelt DATE 3/18/2006

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires January 31, 2004

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU36846

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
FEDERAL 14-19-8-18

9. API Well No.
4304736192

10. Field and Pool, or Exploratory Area
Monument Butte

11. County or Parish, State
Uintah, UT

SUBMIT IN TRIPLICATE - Other Instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
NEWFIELD PRODUCTION COMPANY

3a. Address Route 3 Box 3630
Myton, UT 84052

3b. Phone No. (include are code)
435.646.3721


4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
659 FSL 1979 FWL
SE/SW Section 19 T8S R18E

12. CHECK APPROPRIATE BOX(ES) TO INIDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production(Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Weekly Status Report
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 3/20/2006 MIRU Patterson Rig # 155. Set all equipment. Pressure test Kelly, TIW, Choke manifold, & Bop's to 2,000 psi. Test 8.625 csgn to 1,500 psi. Vernal BLM field, & Roosevelt DOGM office was notified of test. PU BHA and tag cement @ 268'. Drill out cement & shoe. Drill a 7.875 hole with fresh water to a depth of 6,470'. Lay down drill string & BHA. Open hole log w/ Dig/SP/GR log's TD to surface. PU & TIH with Guide shoe, shoe jt, float collar, 151 jt's of 5.5 J-55, 15.5# csgn. Set @ 6447.88' / KB. Cement with 375 sks cement mixed @ 11.0 ppg & 3.43 yld. The 475 sks cement mixed @ 14.4 ppg & 1.24 yld. With all spacers returned to pit. Nipple down Bop's. Drop slips @ 95,000 #'s tension. Release rig 12:30 am on 3/25/2006.

I hereby certify that the foregoing is true and correct Name (Printed/ Typed) Floyd Mitchell	Title Drilling Supervisor
Signature 	Date 03/25/2006

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office _____	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on reverse)

MAR 29 2006

NEWFIELD PRODUCTION COMPANY - CASING & CEMENT REPORT

5 1/2" CASING SET AT 6447.88

LAST CASING 8 5/8" SET AT 308'
 DATUM 12' KB
 DATUM TO CUT OFF CASING 12'
 DATUM TO BRADENHEAD FLANGE _____
 TD Driller 6470' Loggers TD 6461'
 HOLE SIZE 7 7/8"

Flt cllr @ 6406
 OPERATOR Newfield Production Company
 WELL Federal 14-19-8-18
 FIELD/PROSPECT Monument Butte
 CONTRACTOR & RIG # Patterson-UTI Rig # 155

LOG OF CASING STRING:							
PIECES	OD	ITEM - MAKE - DESCRIPTION	WT / FT	GRD	THREAD	CONDT	LENGTH
		Landing Jt					14
	SHJT	5.92' @ 4396'					
151	5 1/2"	ETC LT & C casing	15.5#	J-55	8rd	A	6392
		Float collar					0.6
1	5 1/2"	ETC LT&C csg	15.5#	J-55	8rd	A	42.63
		GUIDE shoe			8rd	A	0.65
CASING INVENTORY BAL.		FEET	JTS	TOTAL LENGTH OF STRING			6449.88
TOTAL LENGTH OF STRING		6449.88	152	LESS CUT OFF PIECE			14
LESS NON CSG. ITEMS		15.25		PLUS DATUM TO T/CUT OFF CSG			12
PLUS FULL JTS. LEFT OUT		171.51	4	CASING SET DEPTH			6447.88
TOTAL		6606.14	156	} COMPARE			
TOTAL CSG. DEL. (W/O THRS)		6606.14	156				
TIMING		1ST STAGE	2nd STAGE	GOOD CIRC THRU JOB <u>NO</u>			
BEGIN RUN CSG.		3/24/2006	12:30 PM	Bbls CMT CIRC TO SURFACE <u>All spacers to pit</u>			
CSG. IN HOLE		3/24/2006	4:30 PM	RECIPROCATED PIPE FOR <u>THRUSTROKE</u>			
BEGIN CIRC		3/24/2006	4:30 PM	DID BACK PRES. VALVE HOLD ? <u>Yes</u>			
BEGIN PUMP CMT		3/24/2006	6:14 PM	BUMPED PLUG TO <u>2350</u> PSI			
BEGIN DSPL. CMT		3/24/2006	19:11				
PLUG DOWN		3/24/2006	7:41 PM				
CEMENT USED		4 CEMENT COMPANY- B. J.					
STAGE	# SX	CEMENT TYPE & ADDITIVES					
1	375	Premlite II w/ 10% gel + 3% KCL, 3#s /sk CSE + 2# sk/kolseal + 1/2#s/sk Cello Flake					
		mixed @ 11.0 ppg W / 3.43 cf/sk yield					
2	475	50/50 poz W/ 2% Gel + 3% KCL, .5%EC1, 1/4# sk C.F. 2% gel. 3% SM mixed @ 14.4 ppg W/ 1.24 YLD					
CENTRALIZER & SCRATCHER PLACEMENT			SHOW MAKE & SPACING				
Centralizers - Middle first, top second & third. Then every third collar for a total of 20.							

COMPANY REPRESENTATIVE Floyd Mitchell DATE 3/25/2006

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires January 31, 2004

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other Instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
 NEWFIELD PRODUCTION COMPANY

3a. Address Route 3 Box 3630
 Myton, UT 84052

3b. Phone No. (include area code)
 435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
 659 FSL 1979 FWL
 SE/SW Section 19 T8S R18E

5. Lease Serial No.
 UTU36846

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
 FEDERAL 14-19-8-18

9. API Well No.
 4304736192

10. Field and Pool, or Exploratory Area
 Monument Butte

11. County or Parish, State
 Uintah, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Variance _____
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	_____

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Newfield Production Company is requesting a variance from Onshore Order 43 CFR Part 3160 Section 4 requiring production tanks to be equipped with Enardo or equivalent vent line valves. Newfield operates wells that produce from the Green River formation, which are relatively low gas producers (20 mcfpd). The majority of the wells are equipped with a three phase separator to maximize gas separation and sales.

Newfield is requesting a variance for safety reasons. Crude oil production tanks equipped with back pressure devices will emit a surge of gas when the thief hatches are open. While gauging tanks, lease operators will be subject to breathing toxic gases as well as risk a fire hazard, under optimum conditions

Accepted by
 Utah Division of
 Oil, Gas and Mining

Federal Approval Of This
 Action Is Necessary

6/7/06
 CHD

Date: 4/25/06
 By: [Signature]

I hereby certify that the foregoing is true and correct

Name (Printed/ Typed) Title
 Mandie Crozier Regulatory Specialist

Signature Date
 [Signature] 04/21/2006

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on reverse)

RECEIVED

APR 24 2006

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an
abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU36846

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
FEDERAL 14-19-8-18

9. API Well No.
4304736192

10. Field and Pool, or Exploratory Area
Monument Butte

11. County or Parish, State
Uintah, UT

SUBMIT IN TRIPlicate - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
NEWFIELD PRODUCTION COMPANY

3a. Address Route 3 Box 3630
Myton, UT 84052

3b. Phone No. (include are code)
435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
659 FSL 1979 FWL
SE/SW Section 19 T8S R18E

12. CHECK APPROPRIATE BOX(ES) TO INIDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production(Start/Resume)	<input type="checkbox"/> Water Shut-Off	
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity	
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____	
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Weekly Status Report	
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal		

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Status report for time period 04/11/06 - 04/20/06

Subject well had completion procedured initiated in the Green River formation on 04-11-06 without the use of a service rig over the well. A cement bond log was run and a total of six Green River intervals were perforated and hydraulically fracture treated with 20/40 mesh sand. Perforated intervals are as follows: Stage #1 (6317'-6332'); Stage #2 (6112'-6128'); Stage #3 (5937'-5950'); Stage #4 (5760'-5772'); Stage #5 (5408'-5427'); Stage #6 (4810'-4824'). All perforations, were 4 JSPF. Composite flow-through frac plugs were used between stages. Fracs were flowed back through chokes. A service rig was moved over the well on 04-18-2006. Bridge plugs were drilled out and well was cleaned to 6404'. Zones were swab tested for sand cleanup. A new 1 1/2" bore rod pump was run in well on sucker rods. Well was placed on production via rod pump on 04-20-2006.

I hereby certify that the foregoing is true and correct	Title
Name (Printed/ Typed) Lana Nebeker	Production Clerk
Signature <i>Lana Nebeker</i>	Date 05/15/2006

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by _____	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on reverse)

RECEIVED
MAY 16 2006
DIV OF OIL GAS & MINING

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT**

5. LEASE DESIGNATION AND SERIAL NO.

UTU-36846

WELL COMPLETION OR RECOMPLETION REPORT AND LOG*

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

NA

1a. TYPE OF WORK

OIL WELL GAS WELL DRY Other _____

7. UNIT AGREEMENT NAME

NA

1b. TYPE OF WELL

NEW WELL WORK OVER DEEPEN PLUG BACK DIFF RESVR. Other _____

8. FARM OR LEASE NAME, WELL NO.

Federal 14-19-8-18

2. NAME OF OPERATOR

Newfield Exploration Company

9. WELL NO.

43-047-36192

3. ADDRESS AND TELEPHONE NO.

1401 17th St. Suite 1000 Denver, CO 80202

10. FIELD AND POOL OR WILDCAT

Eight Mile Flat

4. LOCATION OF WELL (Report locations clearly and in accordance with any State requirements. *)

At Surface 659' FSL & 1979' FWL (SE/SW) Sec. 19, T8S, R18E

11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA

Sec. 19, T8S, R18E

At top prod. Interval reported below

At total depth

14. API NO. 43-047-36192 DATE ISSUED 12/27/04

12. COUNTY OR PARISH Uintah

13. STATE UT

15. DATE SPUNDED 3/17/06

16. DATE T.D. REACHED 3/24/06

17. DATE COMPL. (Ready to prod.) 4/20/06

18. ELEVATIONS (DF, RKB, RT, GR, ETC.)* 5069' GL

5081' KB

19. ELEV. CASINGHEAD

20. TOTAL DEPTH, MD & TVD 6470'

21. PLUG BACK T.D., MD & TVD 6404'

22. IF MULTIPLE COMPL. HOW MANY*

23. INTERVALS DRILLED BY ----->

ROTARY TOOLS X

CABLE TOOLS

24. PRODUCING INTERVAL(S) OF THIS COMPLETION--TOP, BOTTOM, NAME (MD AND TVD)*

Green River 4810'-6332'

25. WAS DIRECTIONAL SURVEY MADE

No

26. TYPE ELECTRIC AND OTHER LOGS RUN

✓ Dual Induction Guard, SP, Compensated Density, Compensated Neutron, GR, Caliper, Cement Bond Log

27. WAS WELL CORED

No

23. CASING RECORD (Report all strings set in well)

CASING SIZE/GRADE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	TOP OF CEMENT, CEMENTING RECORD	AMOUNT PULLED
8-5/8" - J-55	24#	316'	12-1/4"	To surface with 160 sx Class "G" cmt	
5-1/2" - J-55	15.5#	6448'	7-7/8"	375 sx Premlite II and 475 sx 50/50 Poz	

29. LINER RECORD

30. TUBING RECORD

SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
					2-7/8"	EOT @ 6311'	TA @ 6078'

31. PERFORATION RECORD (Interval, size and number)

32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.

INTERVAL	SIZE	SPF/NUMBER	DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
(CP5) 6317'-6332'	.46"	4/60	6317'-6332'	Frac w/ 54,386# 20/40 sand in 563 bbls fluid
(CP2) 6112'-6128'	.43"	4/64	6112'-6128'	Frac w/ 69,980# 20/40 sand in 673 bbls fluid
(LODC) 5937'-5950'	.43"	4/52	5937'-5950'	Frac w/ 35,047# 20/40 sand in 407 bbls fluid
(A2) 5760'-5772'	.43"	4/48	5760'-5772'	Frac w/ 30,222# 20/40 sand in 363 bbls fluid
(C) 5408'-5427'	.43"	4/76	5408'-5427'	Frac w/ 54,950# 20/40 sand in 537 bbls fluid
(PB7) 4810'-4824'	.43"	4/56	4810'-8424'	Frac w/ 39,596# 20/40 sand in 417 bbls fluid

33.* PRODUCTION

DATE FIRST PRODUCTION	PRODUCTION METHOD (Flowing, gas lift, pumping--size and type of pump)	WELL STATUS (Producing or shut-in)					
4/20/06	2-1/2" x 1-1/2" x 14' RHAC SM Plunger Pump	PRODUCING					
DATE OF TEST	HOURS TESTED	CHOKED SIZE	PROD'N. FOR TEST PERIOD	OIL--BBL.	GAS--MCF	WATER--BBL.	GAS-OIL RATIO
30 day ave			----->	78	11	43	141
FLOW TUBING PRESS	CASING PRESSURE	CALCULATED 24-HOUR RATE	OIL--BBL.	GAS--MCF	WATER--BBL.	OIL GRAVITY--API(CORR.)	
		----->					

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.)

Sold & Used for Fuel

11. USE WELL NUMBER
MAY 23 2006

35. LIST OF ATTACHMENTS

DIV. OF OIL, GAS & MINING

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records.

A. Sanchez-Cruz

SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries);

38.	GEOLOGIC MARKERS			
	FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.
				<p style="text-align: center;">Well Name Federal 14-19-8-18</p>
				<p style="text-align: center;">NAME</p> <p>Garden Gulch Mkr Garden Gulch 1 Garden Gulch 2 Point 3 Mkr X Mkr Y-Mkr Douglas Creek Mkr BiCarbonate Mkr B Limestone Mkr Castle Peak Basal Carbonate Total Depth (LOGGERS)</p>
				<p style="text-align: center;">MEAS. DEPTH</p> <p>4216' 4392' 4514' 4779' 5006' 5040' 5176' 5450'</p>
				<p style="text-align: center;">TOP</p>
				<p style="text-align: center;">TRUE VERT. DEPTH</p>

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-36846
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
		7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)
1. TYPE OF WELL Oil Well		8. WELL NAME and NUMBER: FEDERAL 14-19-8-18
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY		9. API NUMBER: 43047361920000
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052	PHONE NUMBER: 435 646-4825 Ext	9. FIELD and POOL or WILDCAT: 8 MILE FLAT NORTH
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0659 FSL 1979 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 19 Township: 08.0S Range: 18.0E Meridian: S		COUNTY: UINTAH
		STATE: UTAH

11.

CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 11/20/2014	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input checked="" type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input checked="" type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The subject well has been converted from a producing oil well to an injection well on 11/20/2014. Initial MIT on the above listed well. On 11/20/2014 the casing was pressured up to 1493 psig and charted for 30 minutes with no pressure loss. The well was not injecting during the test. The tubing pressure was 0 psig during the test. There was not an EPA representative available to witness the test. EPA# UT22197-10632

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
 December 18, 2014

NAME (PLEASE PRINT) Lucy Chavez-Naupoto	PHONE NUMBER 435 646-4874	TITLE Water Services Technician
SIGNATURE N/A	DATE 12/11/2014	

Mechanical Integrity Test

Casing or Annulus Pressure Mechanical Integrity Test

U.S. Environmental Protection Agency
Underground Injection Control Program
999 18th Street, Suite 500 Denver, CO 80202-2466

EPA Witness: _____ Date: 11 20 14
 Test conducted by: Dale Giles
 Others present: _____

Well Name: <u>Federal 14-19-8-18</u>	Type: ER SWD	Status: AC TA UC
Field: <u>Monument Butte</u>		
Location: <u>SE/SW</u> Sec: <u>19</u> T <u>8</u> N <u>18</u> R <u>15</u> E/W	County: <u>Uintah</u>	State: <u>UT</u>
Operator: <u>Newfield Production</u>		
Last MIT: <u>1</u>	Maximum Allowable Pressure: _____	PSIG

Is this a regularly scheduled test? Yes No
 Initial test for permit? Yes No
 Test after well rework? Yes No
 Well injecting during test? Yes No If Yes, rate: _____ bpd

Pre-test casing/tubing annulus pressure: 0 psig

MIT DATA TABLE	Test #1	Test #2	Test #3
TUBING PRESSURE			
Initial Pressure	<u>0</u> psig	psig	psig
End of test pressure	<u>0</u> psig	psig	psig
CASING / TUBING ANNULUS PRESSURE			
0 minutes	<u>1490</u> psig	psig	psig
5 minutes	<u>1491</u> psig	psig	psig
10 minutes	<u>1492</u> psig	psig	psig
15 minutes	<u>1492</u> psig	psig	psig
20 minutes	<u>1493</u> psig	psig	psig
25 minutes	<u>1493</u> psig	psig	psig
30 minutes	<u>1493</u> psig	psig	psig
_____ minutes	psig	psig	psig
_____ minutes	psig	psig	psig
RESULT	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	<input type="checkbox"/> Pass <input type="checkbox"/> Fail	<input type="checkbox"/> Pass <input type="checkbox"/> Fail


Does the annulus pressure build back up after the test? Yes No

MECHANICAL INTEGRITY PRESSURE TEST

Additional comments for mechanical integrity pressure test, such as volume of fluid added to annulus and bled back at end of test, reason for failing test (casing head leak, tubing leak, other), etc.:

Signature of Witness: _____

Federal 14-19-8-18 Conversion MIT
11/20/2014 9:33:02 AM

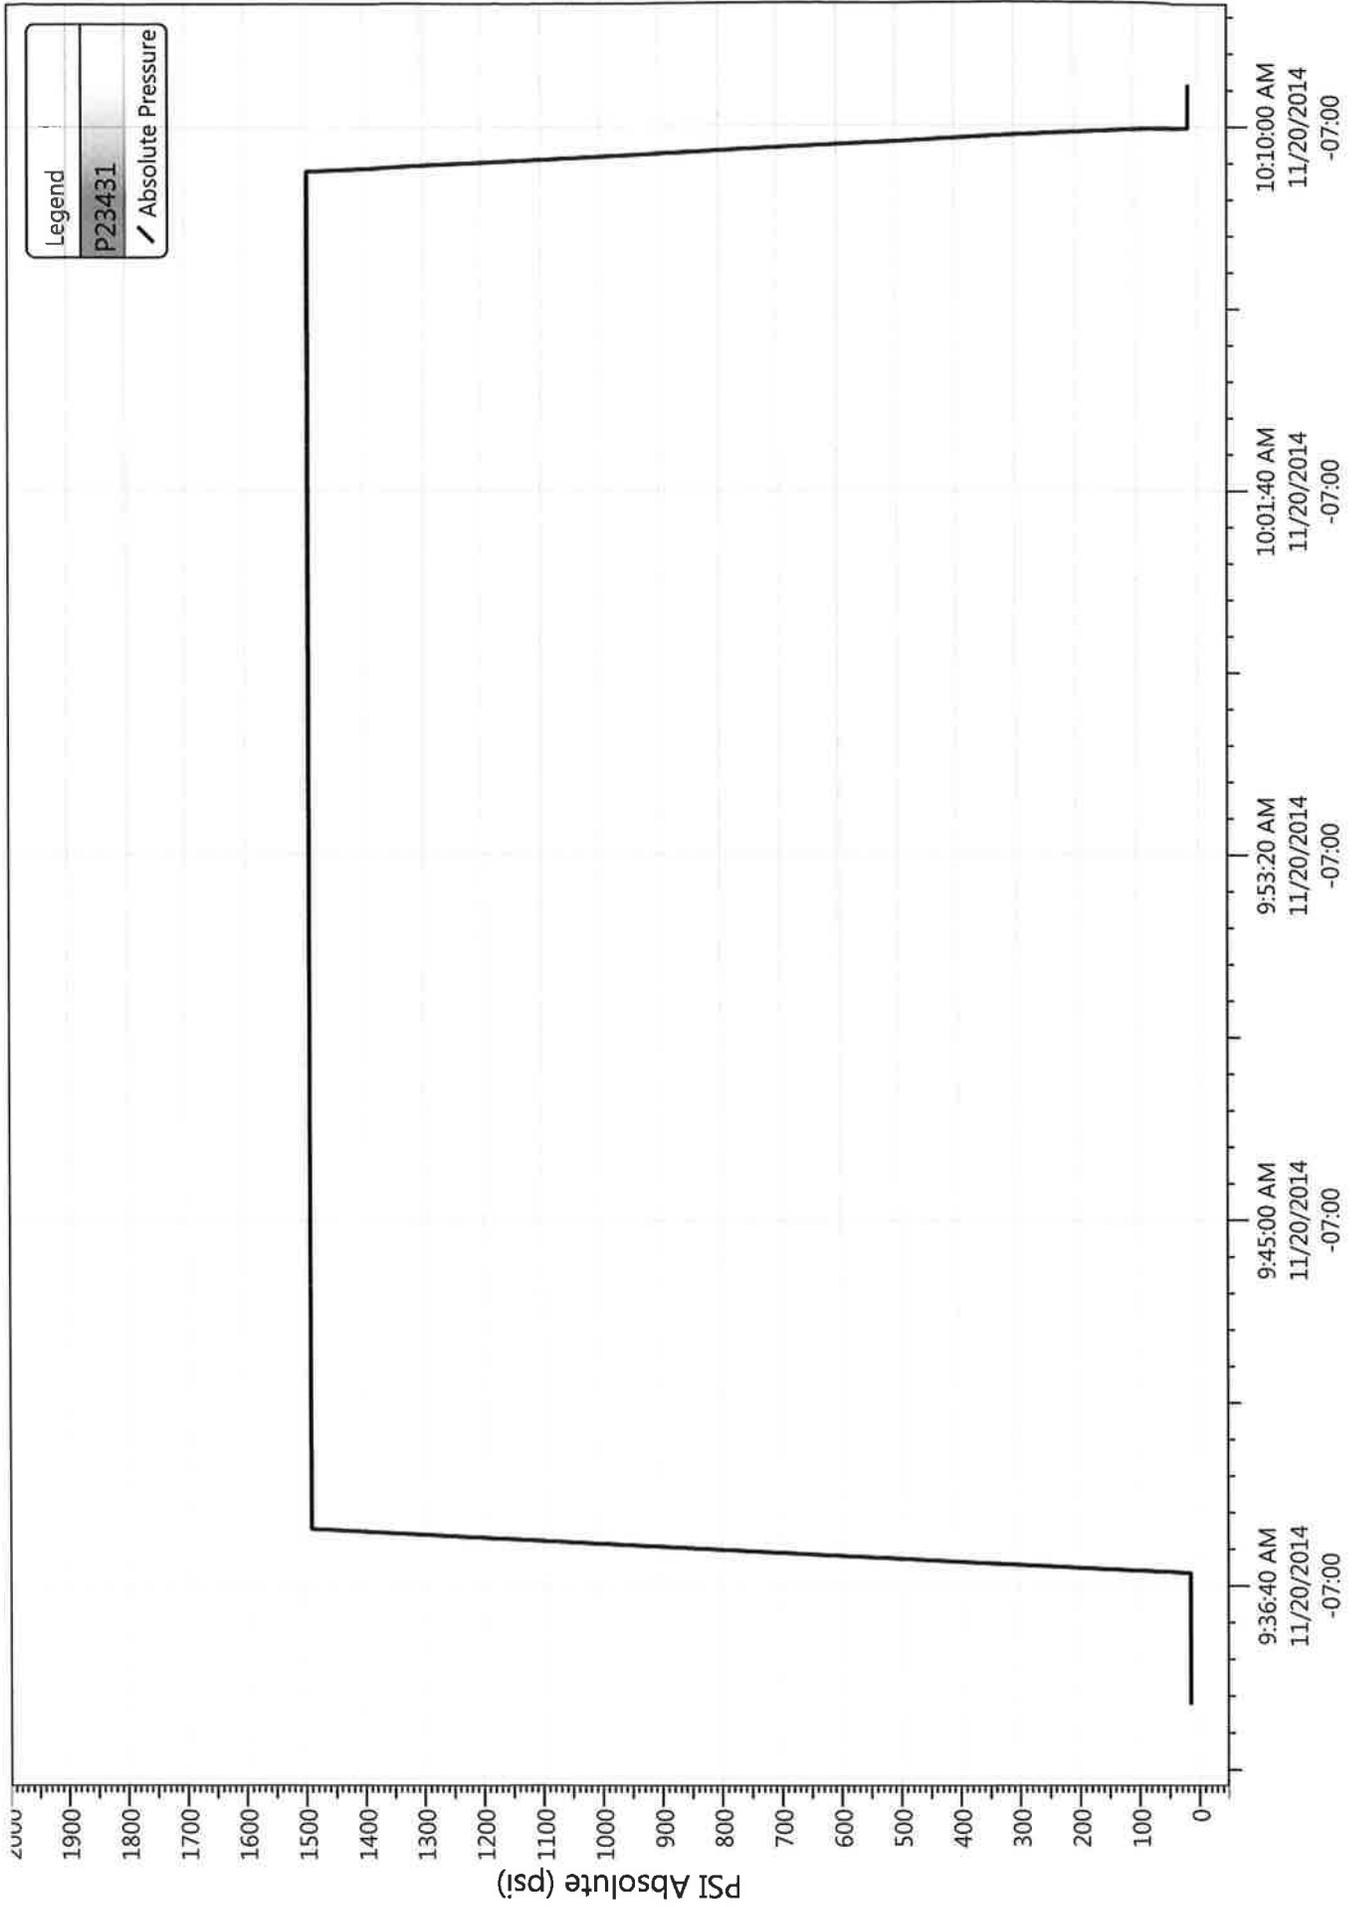

Well Name: Federal 14-19-8-18


Surface Legal Location 19-8S-18E		API/UWI 43047361920000	Well RC 500159323	Lease	State/Province Utah	Field Name GMBU CTB9	County UINTAH
Spud Date 3/17/2006	Rig Release Date 3/25/2006	On Production Date 4/20/2006	Original KB Elevation (ft) 5,081	Ground Elevation (ft) 5,069	Total Depth All (TVD) (ftKB)	PBD (All) (ftKB) Original Hole - 6,404.0	

Most Recent Job

Job Category Production / Workover	Primary Job Type Conversion	Secondary Job Type Basic	Job Start Date 11/17/2014	Job End Date 11/20/2014
---------------------------------------	--------------------------------	-----------------------------	------------------------------	----------------------------

TD: 6,470.0

Vertical - Original Hole, 12/4/2014 1:53:02 PM

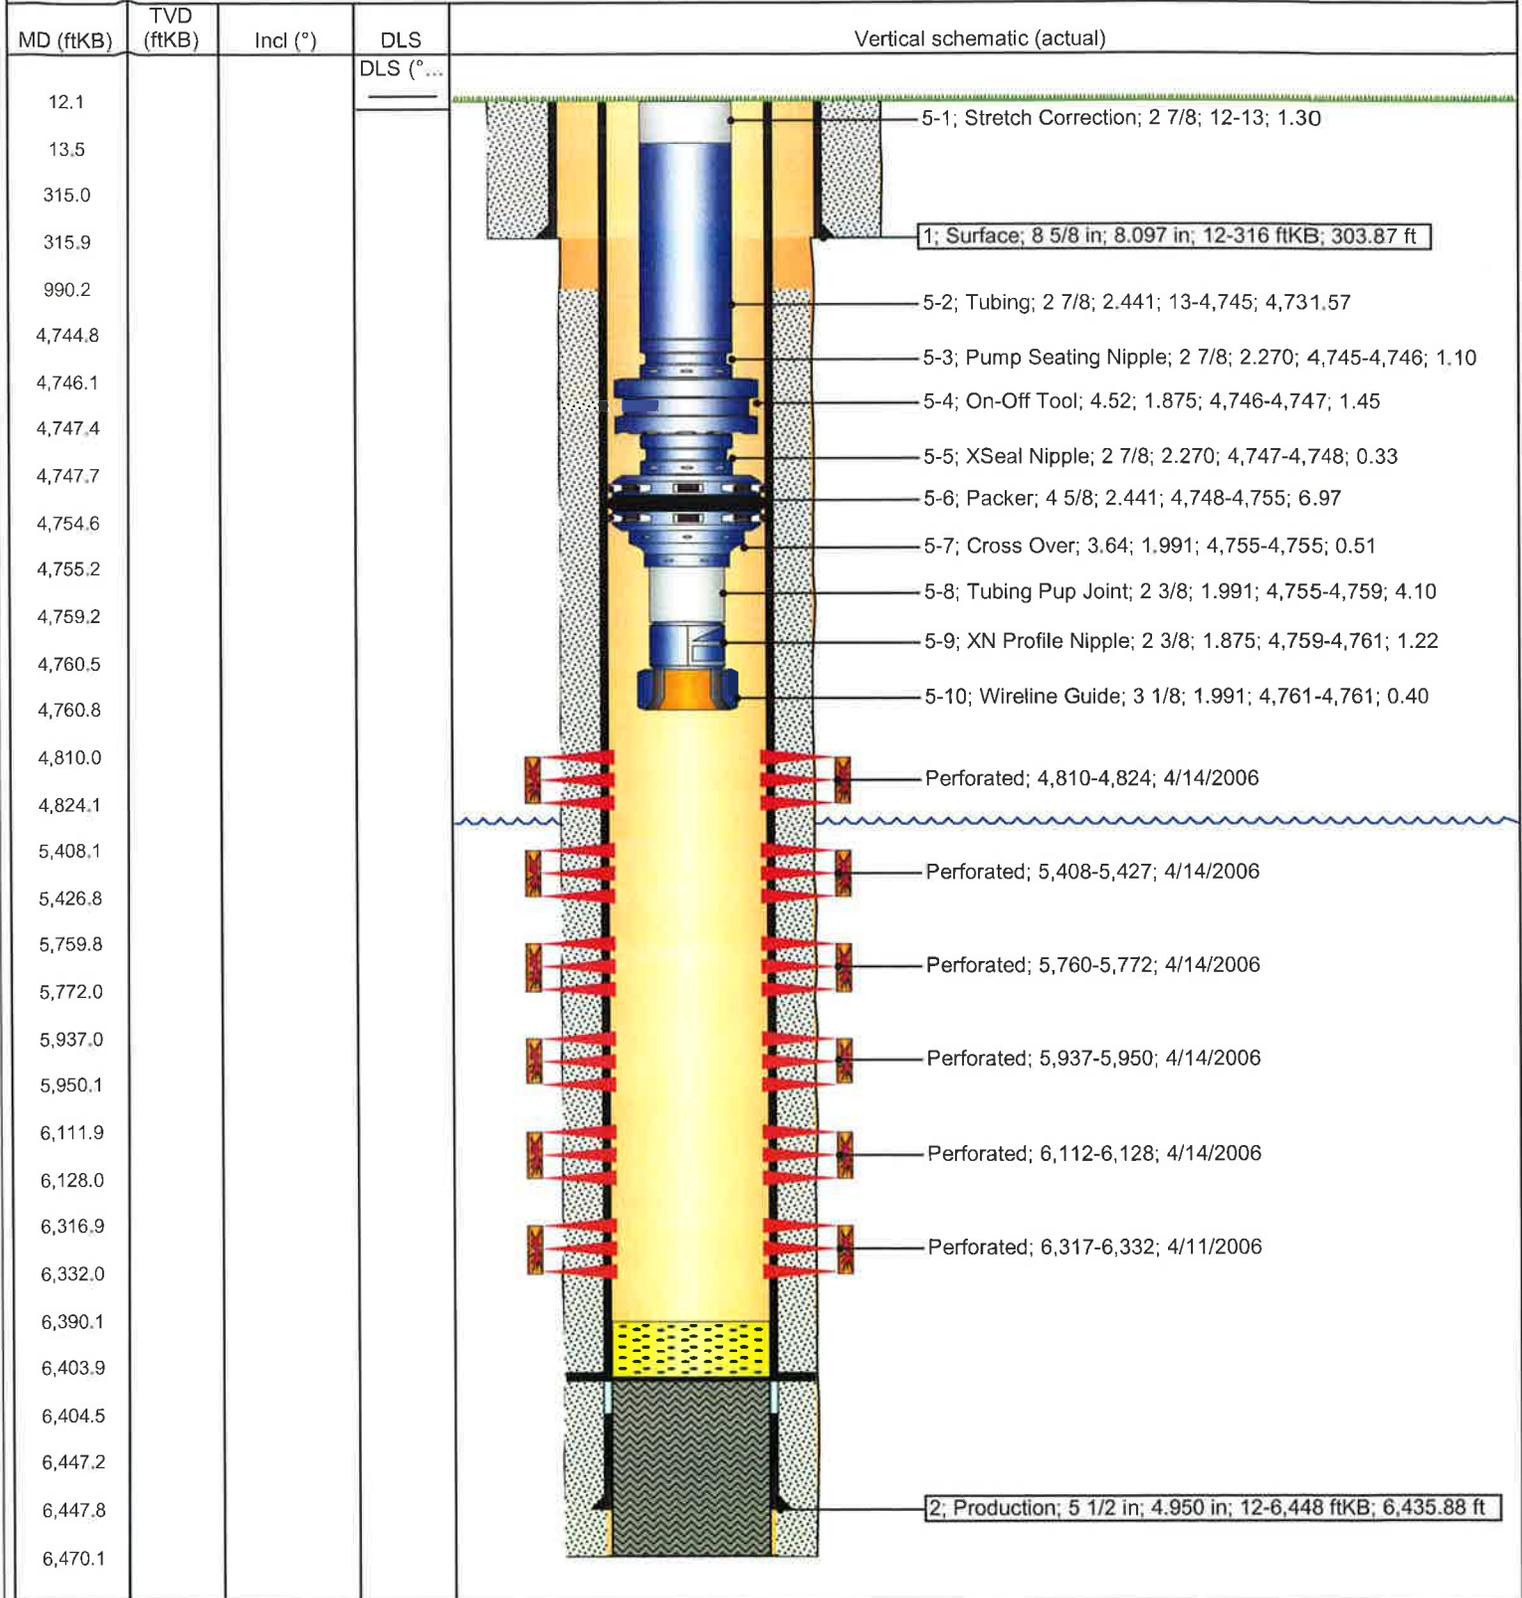

NEWFIELD**Newfield Wellbore Diagram Data
Federal 14-19-8-18**

Surface Legal Location 19-8S-18E		API/UWI 43047361920000		Lease	
County UINTAH		State/Province Utah		Basin Uintah Basin	
Well Start Date 3/17/2006		Spud Date 3/17/2006		Final Rig Release Date 3/25/2006	
Original KB Elevation (ft) 5,081		Ground Elevation (ft) 5,069		Total Depth (ftKB) 6,470.0	
				Total Depth All (TVD) (ftKB) Original Hole - 6,404.0	

Casing Strings

Csg Des	Run Date	OD (in)	ID (in)	Wt/Len (lb/ft)	Grade	Set Depth (ftKB)
Surface	3/17/2006	8 5/8	8.097	24.00	J-55	316
Production	3/24/2006	5 1/2	4.950	15.50	J-55	6,448

Cement**String: Surface, 316ftKB 3/18/2006**

Cementing Company BJ Services Company		Top Depth (ftKB) 12.0	Bottom Depth (ftKB) 315.9	Full Return?	Vol Cement Ret (bbl)
Fluid Description 2% CaCL2 + 1/4#/sk		Fluid Type Lead	Amount (sacks) 160	Class G	Estimated Top (ftKB) 12.0

String: Production, 6,448ftKB 3/24/2006

Cementing Company BJ Services Company		Top Depth (ftKB) 990.0	Bottom Depth (ftKB) 6,470.0	Full Return?	Vol Cement Ret (bbl)
Fluid Description 10% gel + 3% KCL, 3#'s /sk CSE + 2# sk/kolseal + 1/2#'s/sk Cello Flake		Fluid Type Lead	Amount (sacks) 375	Class Premlite II	Estimated Top (ftKB) 990.0
Fluid Description 2% Gel + 3% KCL, .5%EC1, 1/4# sk C.F. 2% gel. 3% SM mixed		Fluid Type Tail	Amount (sacks) 475	Class 50/50 POZ	Estimated Top (ftKB) 3,730.0

Tubing Strings

Tubing Description 11/17/2014		Run Date 11/17/2014		Set Depth (ftKB) 4,761.0				
Item Des	Jts	OD (in)	ID (in)	Wt (lb/ft)	Grade	Len (ft)	Top (ftKB)	Btm (ftKB)
Stretch Correction	1	2 7/8				1.30	12.0	13.3
Tubing	147	2 7/8	2.441	6.50	J-55	4,731.57	13.3	4,744.9
Pump Seating Nipple	1	2 7/8	2.270			1.10	4,744.9	4,746.0
On-Off Tool	1	4.515	1.875			1.45	4,746.0	4,747.4
XSeal Nipple	1	2 7/8	2.270			0.33	4,747.4	4,747.8
Packer	1	4 5/8	2.441			6.97	4,747.8	4,754.7
Cross Over	1	3.635	1.991			0.51	4,754.7	4,755.2
Tubing Pup Joint	1	2 3/8	1.991			4.10	4,755.2	4,759.3
XN Profile Nipple	1	2 3/8	1.875			1.22	4,759.3	4,760.6
Wireline Guide	1	3 1/8	1.991			0.40	4,760.6	4,761.0

Rod Strings

Rod Description		Run Date		Set Depth (ftKB)			
Item Des	Jts	OD (in)	Wt (lb/ft)	Grade	Len (ft)	Top (ftKB)	Btm (ftKB)

Other In Hole

Des	Top (ftKB)	Btm (ftKB)	Run Date	Pull Date
Fill	6,390	6,404	10/1/2007	

Perforation Intervals

Stage#	Zone	Top (ftKB)	Btm (ftKB)	Shot Dens (shots/ft)	Phasing (°)	Norm Hole Dia (in)	Date
6	PB7, Original Hole	4,810	4,824	4	90	0.430	4/14/2006
5	C, Original Hole	5,408	5,427	4	90	0.430	4/14/2006
4	A2, Original Hole	5,760	5,772	4	90	0.430	4/14/2006
3	LODC, Original Hole	5,937	5,950	4	90	0.430	4/14/2006
2	CP2, Original Hole	6,112	6,128	4	90	0.430	4/14/2006
1	CP5, Original Hole	6,317	6,332	4	120	0.460	4/11/2006

Stimulations & Treatments

Stage#	ISIP (psi)	Frac Gradient (psi/ft)	Max Rate (bbl/min)	Max PSI (psi)	Total Clean Vol (bbl)	Total Slurry Vol (bbl)	Vol Recov (bbl)
1	2,350	0.81	25.3	2,275			
2	2,850	0.9	30.3	3,065			
3	1,780	0.73	25.5	1,845			
4	4,180		25.0	2,710			
5	1,500	0.71	25.3	1,610			
6	2,000	0.85	14.5	1,920			

NEWFIELD



**Newfield Wellbore Diagram Data
Federal 14-19-8-18**

Proppant		
Stage#	Total Prop Vol Pumped (lb)	Total Add Amount
1		Proppant Sand 54386 lb
2		Proppant Sand 69980 lb
3		Proppant Sand 35047 lb
4		Proppant Sand 30222 lb
5		Proppant Sand 54950 lb
6		Proppant Sand 39596 lb



Well Name: Federal 14-19-8-18

Job Detail Summary Report

Jobs		Job Start Date	Job End Date
Primary Job Type	Conversion	11/17/2014	11/20/2014

Daily Operations			
Report Start Date	Report End Date	24hr Activity Summary	
11/17/2014	11/17/2014	MIRU	
Start Time	End Time	Comment	
05:30	06:00	C/Travl	
Start Time	End Time	Comment	
06:00	07:00	: Moved From 8-29-8-17	
Start Time	End Time	Comment	
07:00	08:00	: MIRUSU	
Start Time	End Time	Comment	
08:00	09:30	: RDPU, Wait On H/O	
Start Time	End Time	Comment	
09:30	10:30	: BMW H/O Pmped 60BW d/Csg w/ Biocides	
Start Time	End Time	Comment	
10:30	10:45	LD & Strip Polished Rod, US Rod Pmp	
Start Time	End Time	Comment	
10:45	11:30	: Flushed Rods w/ 40BW	
Start Time	End Time	Comment	
11:30	12:00	: Soft Seat Test Tbg, 37BW to Fill, Tbg Failed @ 3200psi,	
Start Time	End Time	Comment	
12:00	15:30	POOH LD Rod String on Trl, 2', 8' x 7/8" Pony Rod, 99- 7/8" 4per Guided, 140- 3/4" 4per Guided, 6- 1 1/2" Wt Bars, (Scale Threw out String), LD Rod Pump (Stuck Around Seat) Flushed w/ 30BW during Trip	
Start Time	End Time	Comment	
15:30	16:30	: XO For Tbg, ND WH Flang, Function Test BOPs, NU BOPs, RU Workfloo	
Start Time	End Time	Comment	
16:30	17:00	: Released TAC, SWIFN.....1730 to 1800 C/Travl	
Report Start Date	Report End Date	24hr Activity Summary	
11/18/2014	11/18/2014	POOH B&D Collars, PU Scrapper	
Start Time	End Time	Comment	
05:30	06:00	C/Travl	
Start Time	End Time	Comment	
06:00	07:00	: Safety Meeting	
Start Time	End Time	Comment	
07:00	12:00	: SICP 100psi SITP 50psi, OWU	
Start Time	End Time	Comment	
12:00	14:30	: POOH w/ 195- Jts, Located Failure in Jt # 150- LD on Trl, LD TAC- PSN- PBGA (Thick Scale on Outside of Tbg), 20'- Of Fill in Tail Jt	
Start Time	End Time	Comment	
14:30	16:00	: Wait on Scrapper	
Start Time	End Time	Comment	
16:00	18:00	MU Slauch Scrapper, TIH w/ 194- Jts,	
Start Time	End Time	Comment	
18:00	18:30	PU 5- Jts, Tag Fill @ 6400' (4' Of Fill on PB, 68' Below Bottom Perf), LD 5- Jts	
Start Time	End Time	Comment	
18:30	19:30	: Steamed on Stack, H/O Flushed Tbg w/ 30BW	
Start Time	End Time	Comment	
19:30	22:00	: POOH w/ 80- Jts B&D Collars	
Start Time	End Time	Comment	
22:00	22:30	SWIFN... H/O Transferred 110Bbbs Oil From TK3 ..1730 to 1800 C/Travl	
Report Start Date	Report End Date	24hr Activity Summary	
11/19/2014	11/19/2014	POOH B&D Collars	



Well Name: Federal 14-19-8-18

Job Detail Summary Report

Start Time	05:30	End Time	06:00	Comment
Start Time	06:00	End Time	07:00	C/Travl Safety Meeting
Start Time	07:00	End Time	07:30	SICP 50psi SITP 50psi, OWU
Start Time	07:30	End Time	11:00	POOH w/ 67- Jts B&D Collars (147- Jts Total, 4731.57')
Start Time	11:00	End Time	12:00	LD Remaining 48- Jts on Trl
Start Time	12:00	End Time	16:00	MU 5 1/2" Arrow Set Injection PKR Assa, TIH w/ 147- Jts
Start Time	16:00	End Time	16:30	H/O Pmped 20BW d/ Tbg, Drop S/Valve, RIH w/ S/Line to Seat, 25BW to Fill
Start Time	16:30	End Time	18:45	PT Tbg to 3050psi, Observ Pressure, 1600: NO PRESSURE LOSS in 30 Min, GOOD TBG TEST!, Retrieved S/Valv
Start Time	18:45	End Time	19:30	RD Workfloor, ND BOPs, Tighten Well Head, MU Injection Tree
Start Time	19:30	End Time	19:45	H/O Pmped 50BW d/ Annulus w/ Multi-Chem PKR Fluids, No Circulation
Start Time	19:45	End Time	21:00	Set AS-1X PKR CE @ 4751' w/ 15000# of Tension, NU 3K Injection Tree, 35BW to Fill, Allowed Gas to Surface
Start Time	21:00	End Time	21:30	PT Csg to 1550psi.....SWIFN w/ 1550psi on Csg...1830 to 1900 C/Travl
Report Start Date	11/20/2014	Report End Date	11/20/2014	24hr Activity Summary
Start Time	05:30	End Time	06:00	C/Trvl
Start Time	06:00	End Time	07:00	Safety meeting
Start Time	07:00	End Time	09:45	SICP 1490psi SITP 50psi, Open Tbg
Start Time	09:45	End Time	10:15	NFX Wtr Service Rep Performed MIT Initial MIT on the above listed well. On 11/20/2014 the casing was pressured up to 1493 psig and charted for 30 minutes with no pressure loss. The well was not injecting during the test. The tubing pressure was 0 psig during the test. There was not an EPA representative available to witness the test. EPA# UT22197-10632
Start Time	10:15	End Time	11:00	MIT Passed, 6psi Gain in 30Min, 1100: RDMOSU.....FINAL RIG REPORT.....WELL READY FOR INJECTION

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-36846	
SUNDRY NOTICES AND REPORTS ON WELLS	
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	
6. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)	
1. TYPE OF WELL Water Injection Well	
8. WELL NAME and NUMBER: FEDERAL 14-19-8-18	
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY	
9. API NUMBER: 43047361920000	
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052	
PHONE NUMBER: 435 646-4825 Ext	
9. FIELD and POOL or WILDCAT: 8 MILE FLAT NORTH	
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0659 FSL 1979 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 19 Township: 08.0S Range: 18.0E Meridian: S	
COUNTY: UINTAH	
STATE: UTAH	

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 1/7/2015	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input checked="" type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input checked="" type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The above reference well was put on injection at 4:45 PM on 01/07/2015. EPA # UT22197-10632

**Accepted by the
 Utah Division of
 Oil, Gas and Mining
 FOR RECORD ONLY
 January 15, 2015**

NAME (PLEASE PRINT) Lucy Chavez-Naupoto	PHONE NUMBER 435 646-4874	TITLE Water Services Technician
SIGNATURE N/A	DATE 1/14/2015	