

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT
(highlight changes)

001

APPLICATION FOR PERMIT TO DRILL			5. MINERAL LEASE NO: ML-47060	6. SURFACE: State
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>			7. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>			8. UNIT or CA AGREEMENT NAME:	
2. NAME OF OPERATOR: WESTPORT OIL & GAS COMPANY, L.P.			9. WELL NAME and NUMBER: STATE 1021-36P	
3. ADDRESS OF OPERATOR: 1368 S 1200 E CITY VERNAL STATE UT ZIP 84078			PHONE NUMBER: (435) 781-7060	10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 547' FSL 742' FEL AT PROPOSED PRODUCING ZONE:			11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 36 10S 21E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 25.5 MILES SOUTHEAST OF OURAY, UTAH			12. COUNTY: UINTAH	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 547'	16. NUMBER OF ACRES IN LEASE: 640	17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 40		
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) REFER TO TOPO C	19. PROPOSED DEPTH: 8,600	20. BOND DESCRIPTION: STATE SURETY RLB0005236		
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 5458' UNGRADED GL	22. APPROXIMATE DATE WORK WILL START:	23. ESTIMATED DURATION: TO BE DETERMINED		

24. **PROPOSED CASING AND CEMENTING PROGRAM**

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT	SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT		
12 1/4"	9 5/8" 32.3# H-40, STC	1,800	PREM CMT	265 SX	1.18 15.6
7 7/8"	4 1/2" 11.6# I-80, LTC	8,600	PREM LITE II	390 SX	3.38 11.0
			50/50 POZ G	1420 SX	1.31 14.3

25. **ATTACHMENTS**

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:

<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER	<input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR CORPORATION OTHER THAN THE LEASE OWNER

RECEIVED
MAR 18 2005

NAME (PLEASE PRINT) DEBRA DOMENICI TITLE ENVIRONMENTAL ASSISTANT

SIGNATURE *Debra Domenici* DATE 3/11/05

(This space for State use only)

API NUMBER ASSIGNED: 43-047-36420 APPROVAL:

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 04-18-05
By: *[Signature]*

T10S, R21E, S.L.B.&M.

WESTPORT OIL AND GAS COMPANY, L.P.


Well location, STATE 1021-36P, located as shown in the SE 1/4 SE 1/4 of Section 36, T10S, R21E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.



SCALE
CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.


John L. Heu
REGISTERED LAND SURVEYOR
REGISTRATION NO. 161319
STATE OF UTAH

UINTAH ENGINEERING & LAND SURVEYING
85 SOUTH 200 EAST - VERNAL, UTAH 84078
(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 12-6-04	DATE DRAWN: 12-29-04
PARTY B.B. J.M. K.G.		REFERENCES G.L.O. PLAT
WEATHER COLD	FILE WESTPORT OIL AND GAS COMPANY, L.P.	

S89°43'W - 1328.25' (G.L.O.) S89°43'W - 1328.25' (G.L.O.) S89°44'27"W - 2655.41' (Meas.)

R
21
E R
22
E

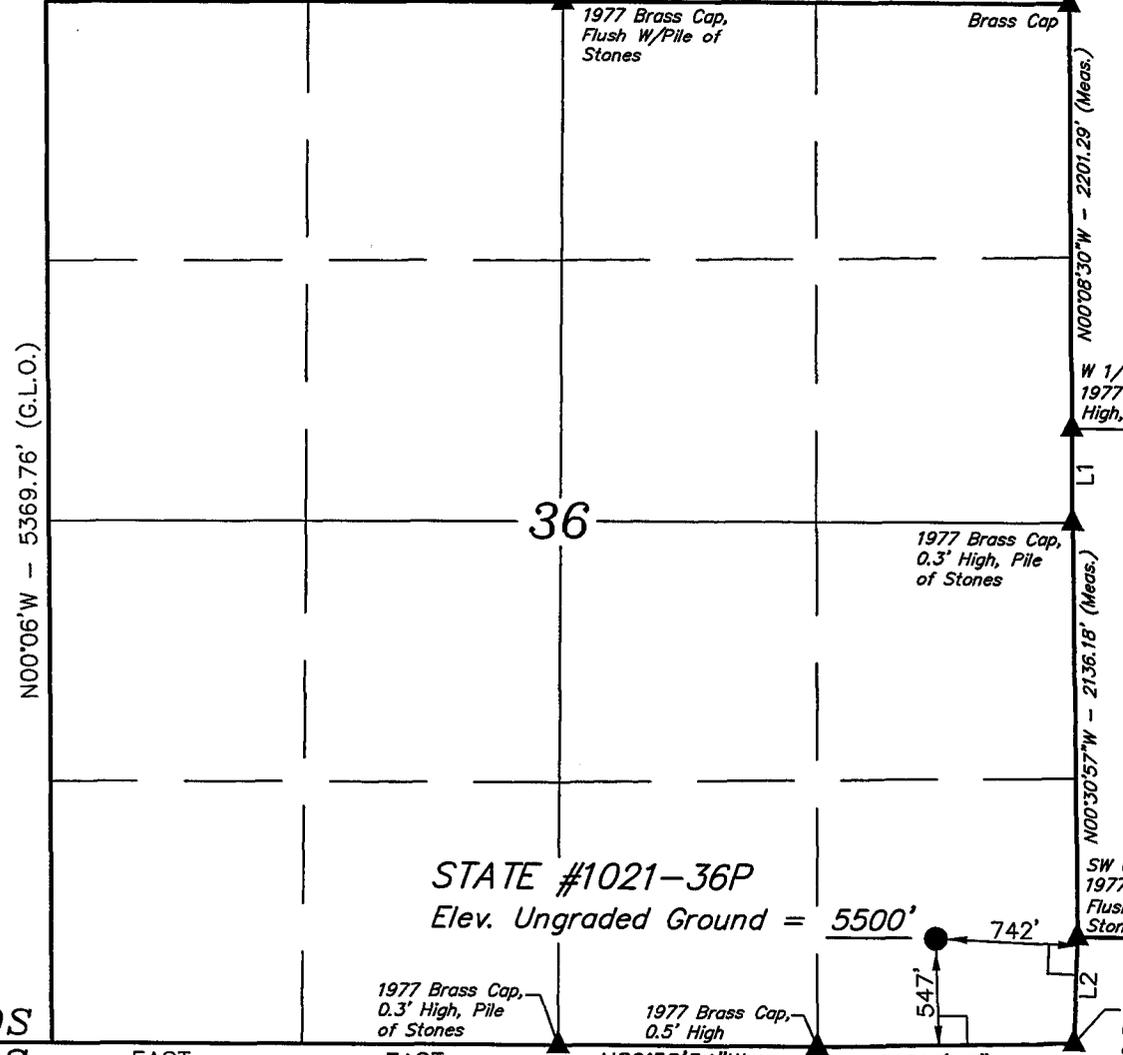

EAST - 1290.96' (G.L.O.) EAST - 1335.18' (G.L.O.) N89°58'54"W - 1360.59' (Meas.) S88°47'38"W - 1346.08' (Meas.)

LINE TABLE

LINE	DIRECTION	LENGTH
L1	N00°13'23"W	484.64'
L2	N02°12'25"E	546.05'

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)
LATITUDE = 39°53'53.35" (39.898153)
LONGITUDE = 109°29'33.09" (109.492525)
(NAD 27)
LATITUDE = 39°53'53.47" (39.898186)
LONGITUDE = 109°29'30.63" (109.491842)

STATE #1021-36P
SESE Sec. 36, T10S-R21E
Uintah County, UT
ML-47060

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. **Existing Roads:**

Refer to Topo Map A for directions to the location.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

2. **Planned Access Roads:**

Approximately 0.3 miles of new access road is proposed. Refer to Topo Map B for the location of the proposed access road.

The upgraded and new portions of the access road will be crowned and ditched with a running surface of 18 feet and a maximum disturbed width of 30 feet. Appropriate water control will be installed to control erosion.

Existence of pipelines; maximum grade; turnouts; major cut and fills, culverts, or bridges; gates, cattle guards, fence cuts, or modifications to existing facilities will be determined at the on-site.

The access road was centerline flagged during time of staking.

Surfacing material may be necessary, depending upon weather conditions.

Surface disturbance and vehicular traffic will be limited to the approved location and approved access route. Any additional area needed will be approved in advance.

3. **Location of Existing Wells Within a 1-Mile Radius**

Please refer to Topo Map C.

4. **Location of Existing & Proposed Facilities & Pipelines**

The following guidelines will apply if the well is productive.

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes

will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The required color is Carlsbad Canyon, standard color number 2.5Y 6/2.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

Approximately 1150' of up to 8" pipeline is proposed. The pipeline will be butt-welded together. Refer to Topo D for the proposed pipeline.

5. Location and Type of Water Supply:

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec. 32, T4S, R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

6. Source of Construction Materials

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

7. Methods of Handling Waste Materials

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge of liquids.

A plastic reinforced liner and felt will be used, it will be a minimum of 16 mil thick, with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec. 35, T9S, R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E.

8. Ancillary Facilities

None are anticipated.

9. Well Site Layout: (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

The reserve pit will be lined, and when the reserve pit is closed, the pit liner will be buried below plow depth.

All pits will be fenced according to the following minimum standards:

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

The net wire shall be no more than two inches above the ground. The barbed wire shall be three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Location size may change prior to the drilling of the well due to current rig availability. If the proposed location is not large enough to accommodate the drilling rig the location will be re-surveyed and a Form 9 shall be submitted.

10. Plans for Reclamation of the Surface:

Producing Location:

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

A plastic, nylon reinforced liner will be used, it shall be torn and perforated before backfilling of the reserve pit.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water (s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling, and recontouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

Dry Hole/Abandoned Location:

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations.

11. Surface Ownership:

SITLA
675 East 500 South, Suite 500
Salt Lake City, UT 84102

12. Other Information:

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance.

The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

A Class III archaeological survey will be submitted when it is received by our office.

This location is not within 460' from the boundary of the Natural Buttes Unit, nor is it Within 460' of any non-committed tract lying within the boundaries of the Unit.

13. Lessee's or Operators's Representative & Certification:

Debra Domenici
Environmental Assistant
Westport O&G Co.
1368 South 1200 East
Vernal, UT 84078
(435) 781-7060

Randy Bayne
Drilling Operations Manager
Westport O&G Co.
1368 South 1200 East
Vernal, UT 84078
(435)781-7018

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Westport O&G Co. is considered to be the operator of the subject well. Westport O&G Co. agrees to be responsible under terms and conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by State Surety Bond #RLB0005236.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

Debra Domenici
Debra Domenici

3/16/05
Date

STATE #1021-36P
SESE SECTION 36-T10S-R21E
UINTAH COUNTY, UTAH
LEASE NUMBER: ML-47060

ONSHORE ORDER NO. 1
WESTPORT OIL & GAS COMPANY

DRILLING PROGRAM

1. **Estimated Tops of Important Geologic Markers:**

<u>Formation</u>	<u>Depth</u>
Uinta	Surface
Green River	948'
Wasatch	4048'
Mesa Verde	6548'
Total Depth	8600'

2. **Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:**

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
	Green River	948'
Gas	Wasatch	4048'
	Mesa Verde	6548'
Water	N/A	
Other Minerals	N/A	

3. **Pressure Control Equipment:**

Please refer to the attached Drilling Program.

4. **Proposed Casing & Cementing Program:**

Please refer to the attached Drilling Program.

5. **Drilling Fluids Program:**

Please refer to the attached Drilling Program.

6. **Evaluation Program:**

Please refer to the attached Drilling Program.

7. Abnormal Conditions:

Maximum anticipated bottomhole pressure at 8600' TD approximately equals 3440 psi (calculated at 0.4 psi/foot).

Maximum anticipated surface pressure equals approximately 1548 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. Anticipated Starting Dates & Notification of Operations:

Please refer to the attached Drilling Program.

9. Variances:

Please refer to the attached Drilling Program.

10. Other Information:

Please refer to the attached Drilling Program.


Westport Oil and Gas Company, L.P.
DRILLING PROGRAM

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'						
SURFACE	9-5/8"	0 to 1800	32.30	H-40	STC	2270	1370	254000
						0.88*****	1.63	4.99
PRODUCTION	4-1/2"	0 to 8600	11.60	I-80	LTC	7780	6350	201000
						3.02	1.42	2.31

- 1) Max Anticipated Surf. Press.(MASP) (Surface Casing) = (Pore Pressure at next csg point-(0.22 psi/ft-partial evac gradient x TVD of next csg point)
 2) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft-partial evac gradient x TD)
 (Burst Assumptions: TD = 10.0 ppg) .22 psi/ft = gradient for partially evac wellbore
 (Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)
 MASP 2580 psi

***** Burst SF is low but csg is much stronger than formation at 2000'. EMW @ 2000' for 2270# is 21.8 ppg or 1.13 psi/ft

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE Option 1	LEAD	500	Premium cmt + 2% CaCl + .25 pps flocele	215	60%	15.60	1.18
	TOP OUT CMT (1)	200	20 gals sodium silicate + Premium cmt + 2% CaCl + .25 pps flocele	50		15.60	1.18
	TOP OUT CMT (2)	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
NOTE: If well will circulate water to surface, option 2 will be utilized							
SURFACE Option 2	LEAD	1500	Prem cmt + 16% Gel + 10 pps gilsonite + .25 pps Flocele + 3% salt BWOC	170	35%	11.00	3.82
	TAIL	500	Premium cmt + 2% CaCl + .25 pps flocele	180	35%	15.60	1.18
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
PRODUCTION	LEAD	3,540'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	390	60%	11.00	3.38
	TAIL	5,060'	50/50 Poz/G + 10% salt + 2% gel +.1% R-3	1420	60%	14.30	1.31

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained
 *Substitute caliper hole volume plus 15% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.
 BOPE: 11" 3M with one annular and 2 rams. Test to 3,000 psi (annular to 1,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.
 Drop Totco surveys every 2000'. Maximum allowable hole angle is 5 degrees.

DRILLING ENGINEER: _____
 Brad Laney

DATE: _____

DRILLING SUPERINTENDENT: _____
 Randy Bayne STATE1021-36P_APD.xls

DATE: _____

WESTPORT OIL & GAS COMPANY, L.P.

STATE #1021-36P

LOCATED IN UINTAH COUNTY, UTAH

SECTION 36, T10S, R21E, S.L.B.&M.

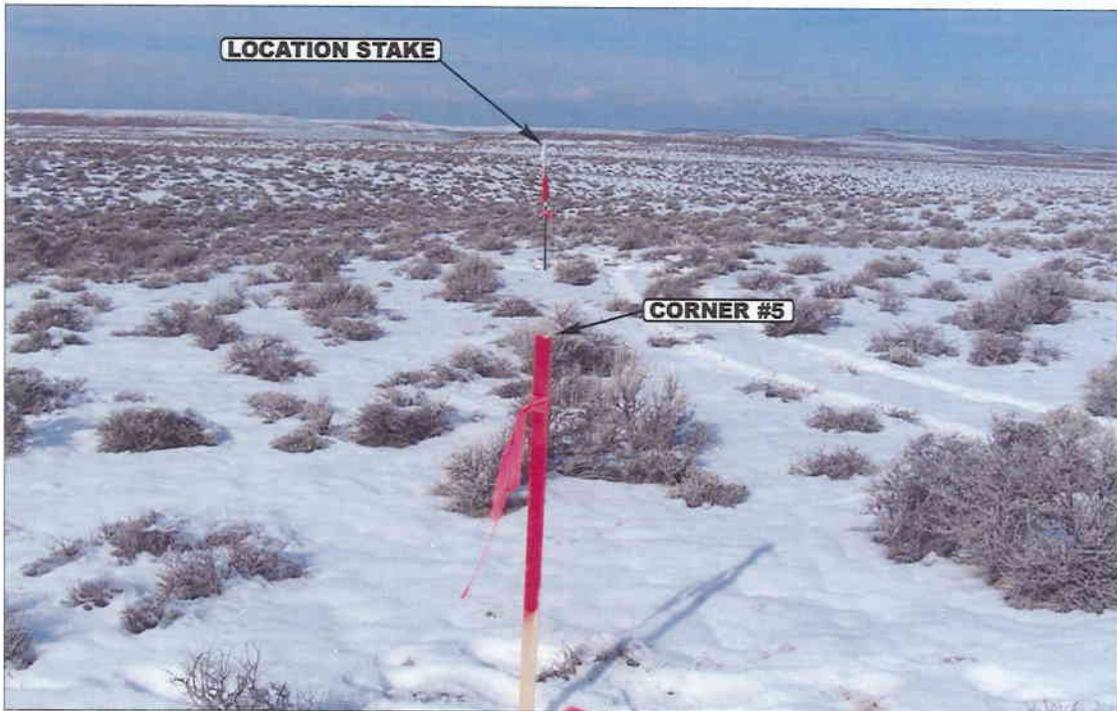


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHWESTERLY



- Since 1964 -

U
E
L
S Uintah Engineering & Land Surveying

85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS


12 14 04
MONTH DAY YEAR

PHOTO

TAKEN BY: B.B.

DRAWN BY: L.K.

REVISED: 00-00-00

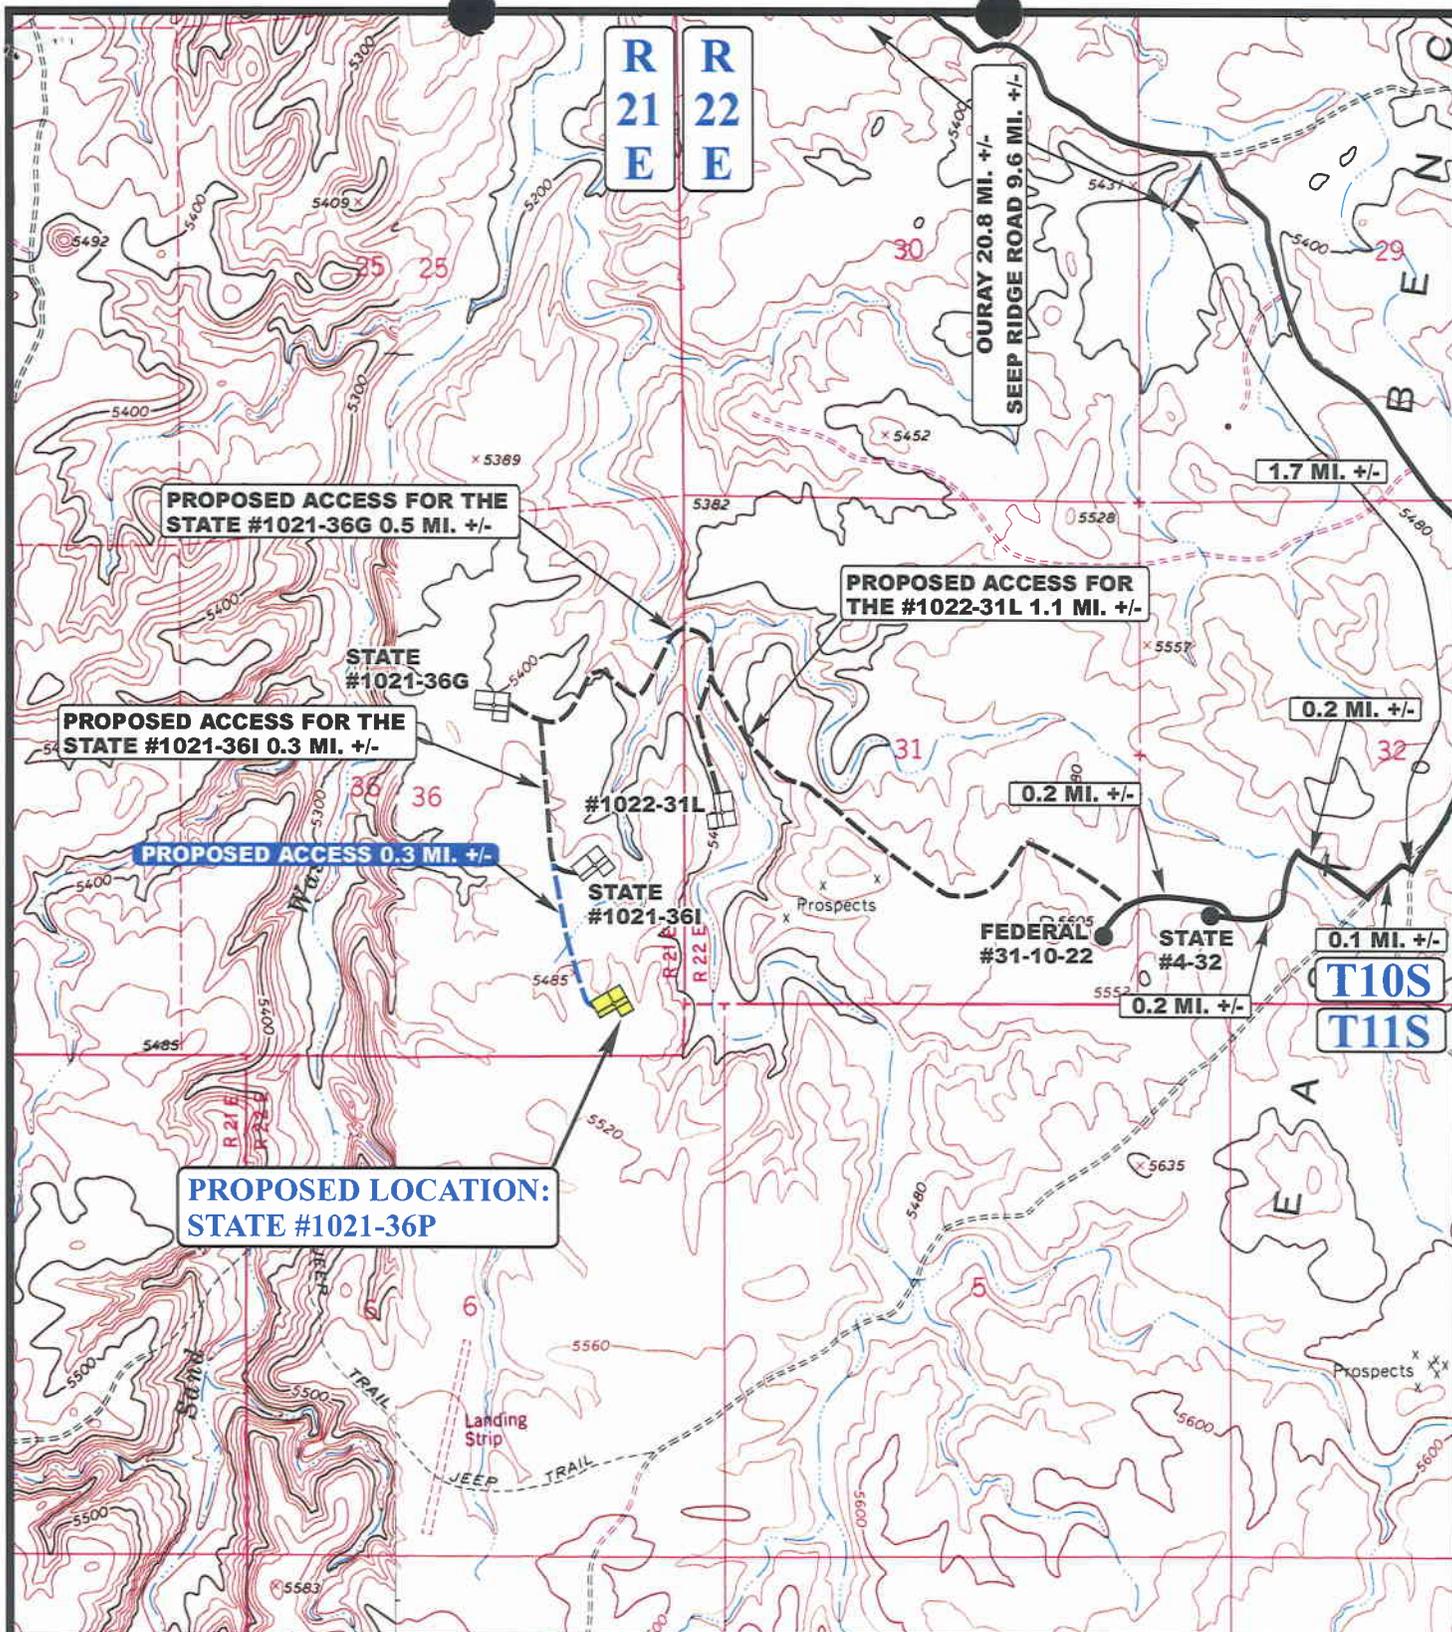

LEGEND:

- EXISTING ROAD
- PROPOSED ACCESS ROAD



WESTPORT OIL AND GAS COMPANY, L.P.

STATE #1021-36P
SECTION 36, T10S, R21E, S.L.B.&M.
547' FSL 724' FEL

Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC

MAP

SCALE: 1" = 2000'


12 14 04

MONTH DAY YEAR

DRAWN BY: L.K. REV: 03-14-05 L.K.

B

TOPO

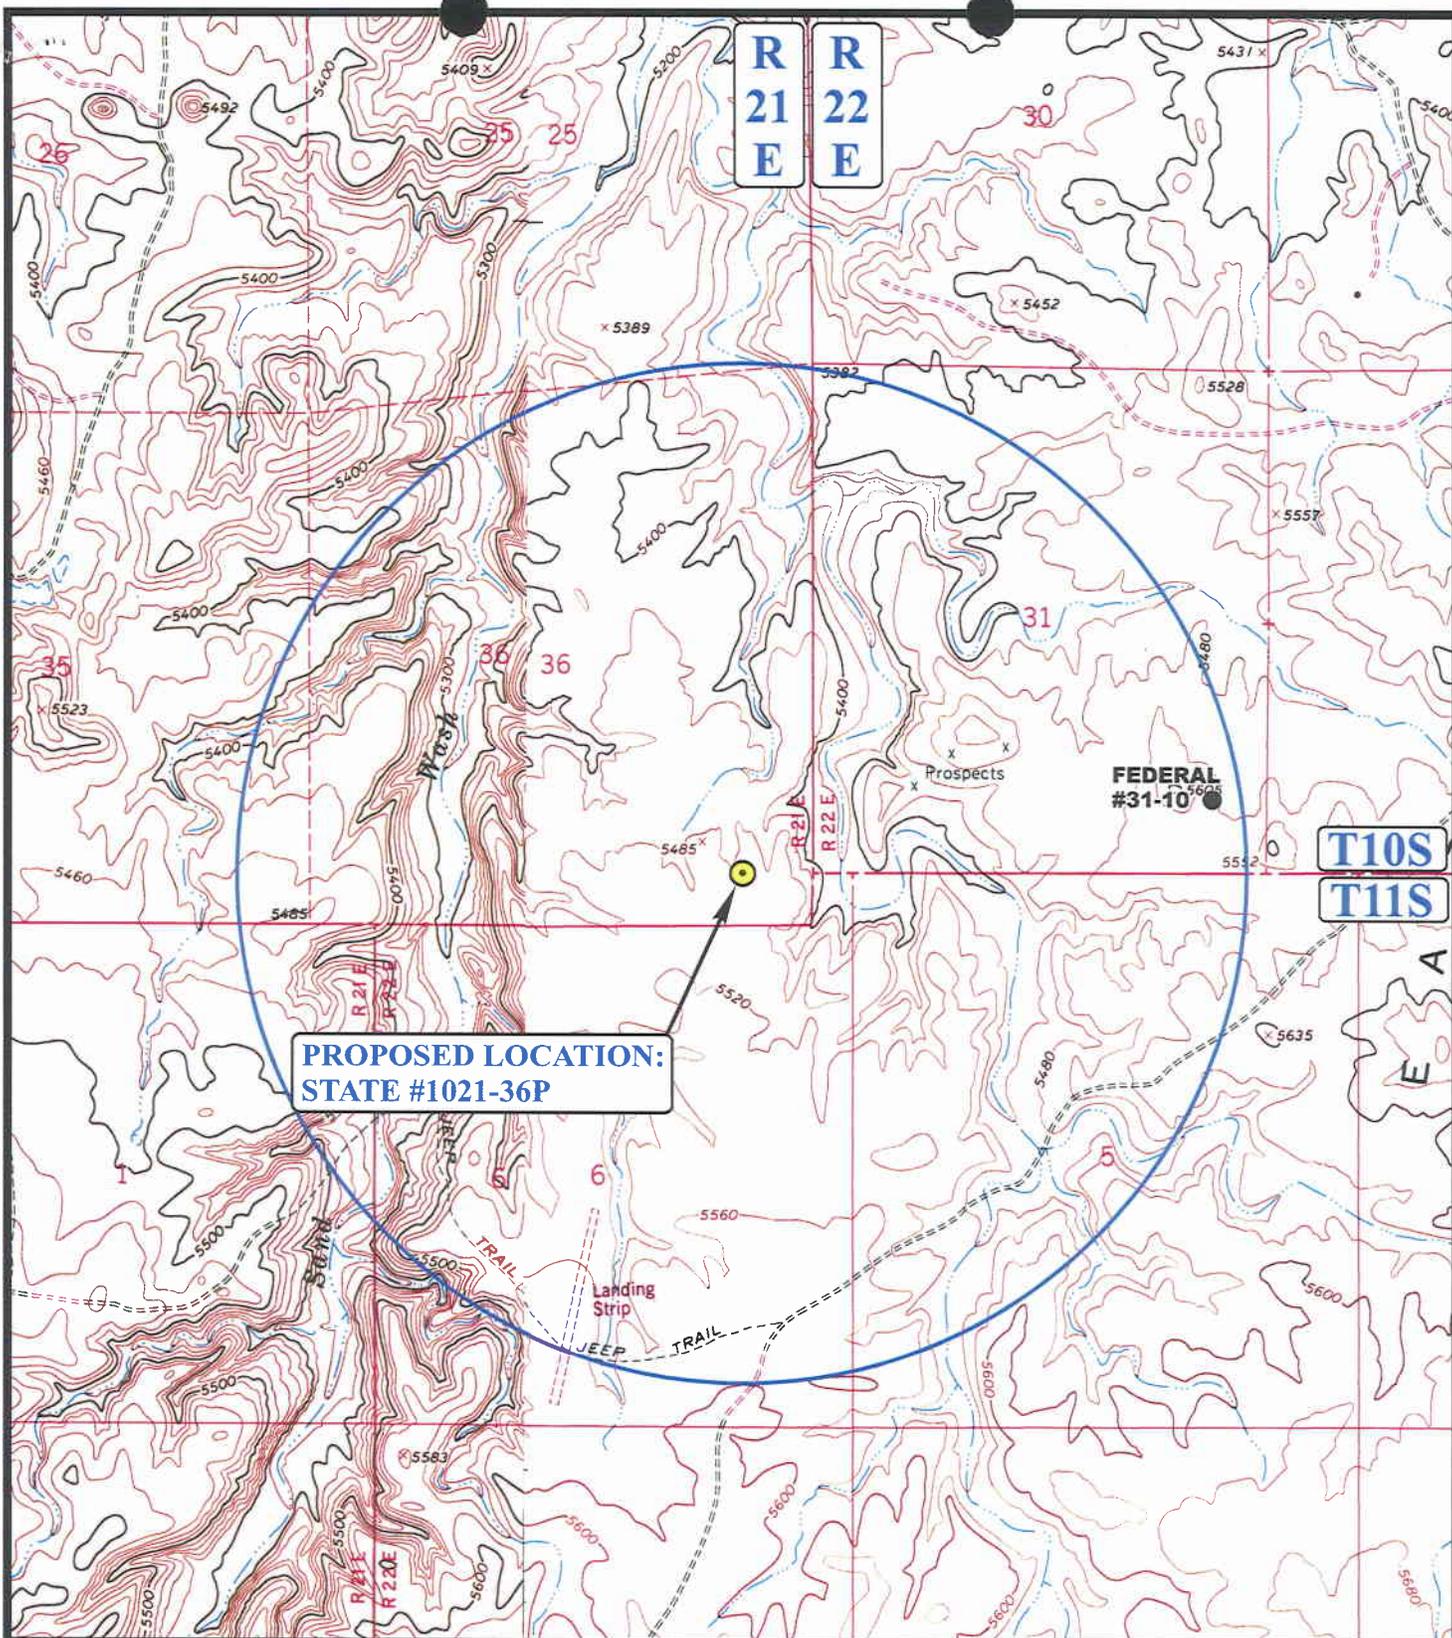

**PROPOSED LOCATION:
STATE #1021-36P**

LEGEND:

- | | |
|-------------------|-------------------------|
| ⊗ DISPOSAL WELLS | ⊗ WATER WELLS |
| ● PRODUCING WELLS | ● ABANDONED WELLS |
| ● SHUT IN WELLS | ● TEMPORARILY ABANDONED |

WESTPORT OIL & GAS COMPANY, L.P.

**STATE #1021-36P
SECTION 36, T10S, R21E, S.L.B.&M.
547' FSL 724' FEL**




Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**

12 14 04
MONTH DAY YEAR



SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 00-00-00

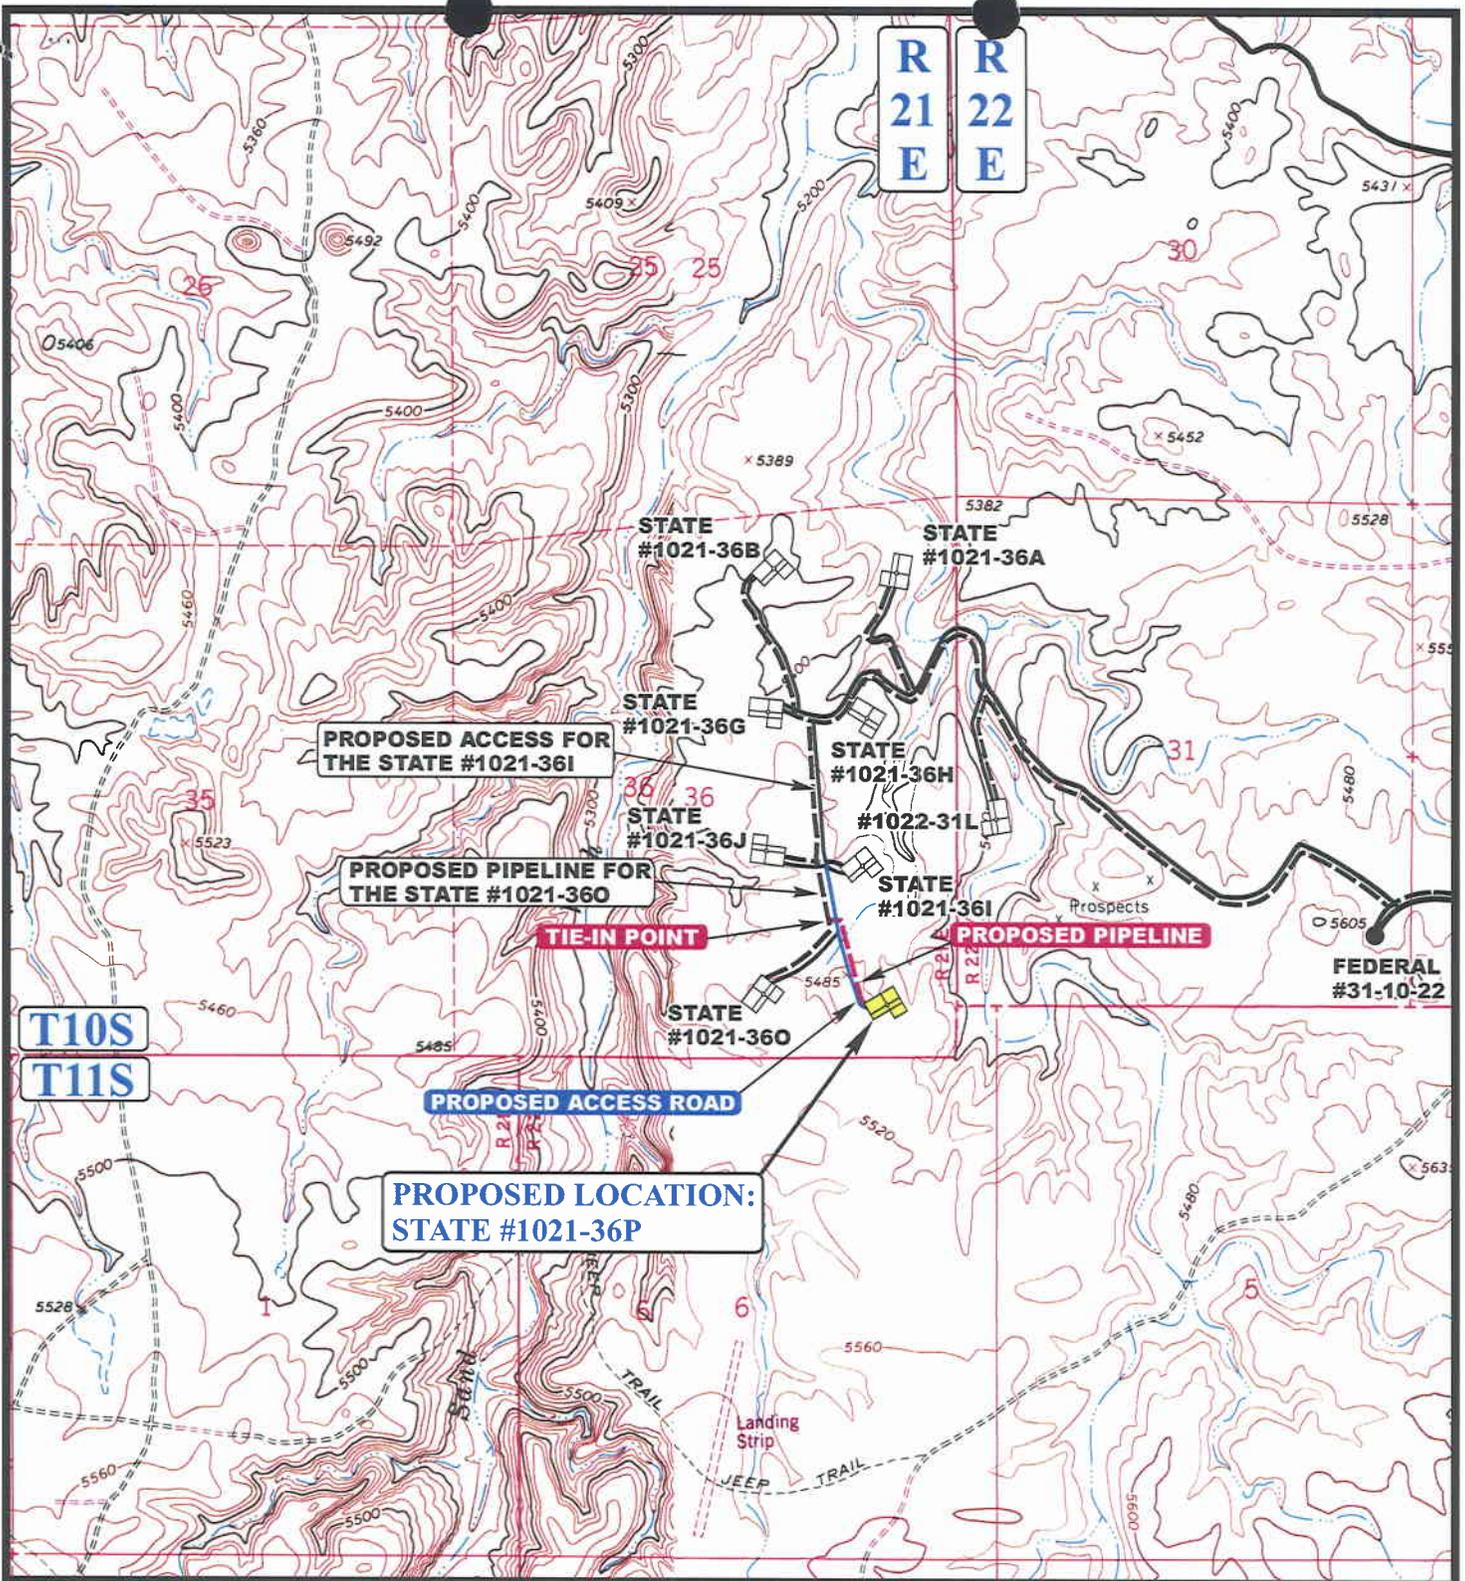

APPROXIMATE TOTAL PIPELINE DISTANCE = 1150' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- - - - - PROPOSED PIPELINE

WESTPORT OIL AND GAS COMPANY, L.P.

STATE #1021-36P
SECTION 36, T10S, R21E, S.L.B.&M.
547' FSL 724' FEL

UEIS
Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC MAP **12 14 04**
 MONTH DAY YEAR
 SCALE: 1" = 2000' DRAWN BY: L.K. REV: 03-14-05 L.K. **D**
 TOPO


WESTPORT OIL AND GAS COMPANY, L.P.

FIGURE #1

LOCATION LAYOUT FOR



STATE #1021-36P
SECTION 36, T10S, R21E, S.L.B.&M.
547' FSL 742' FEL

Proposed Access Road

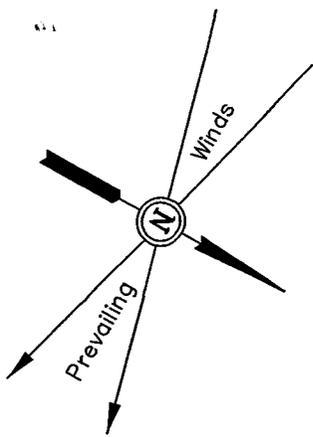

SCALE: 1" = 50'
DATE: 12-29-04
Drawn By: K.G.

NOTE:
Flare Pit is to be located
a min. of 100' from the
Well Head.

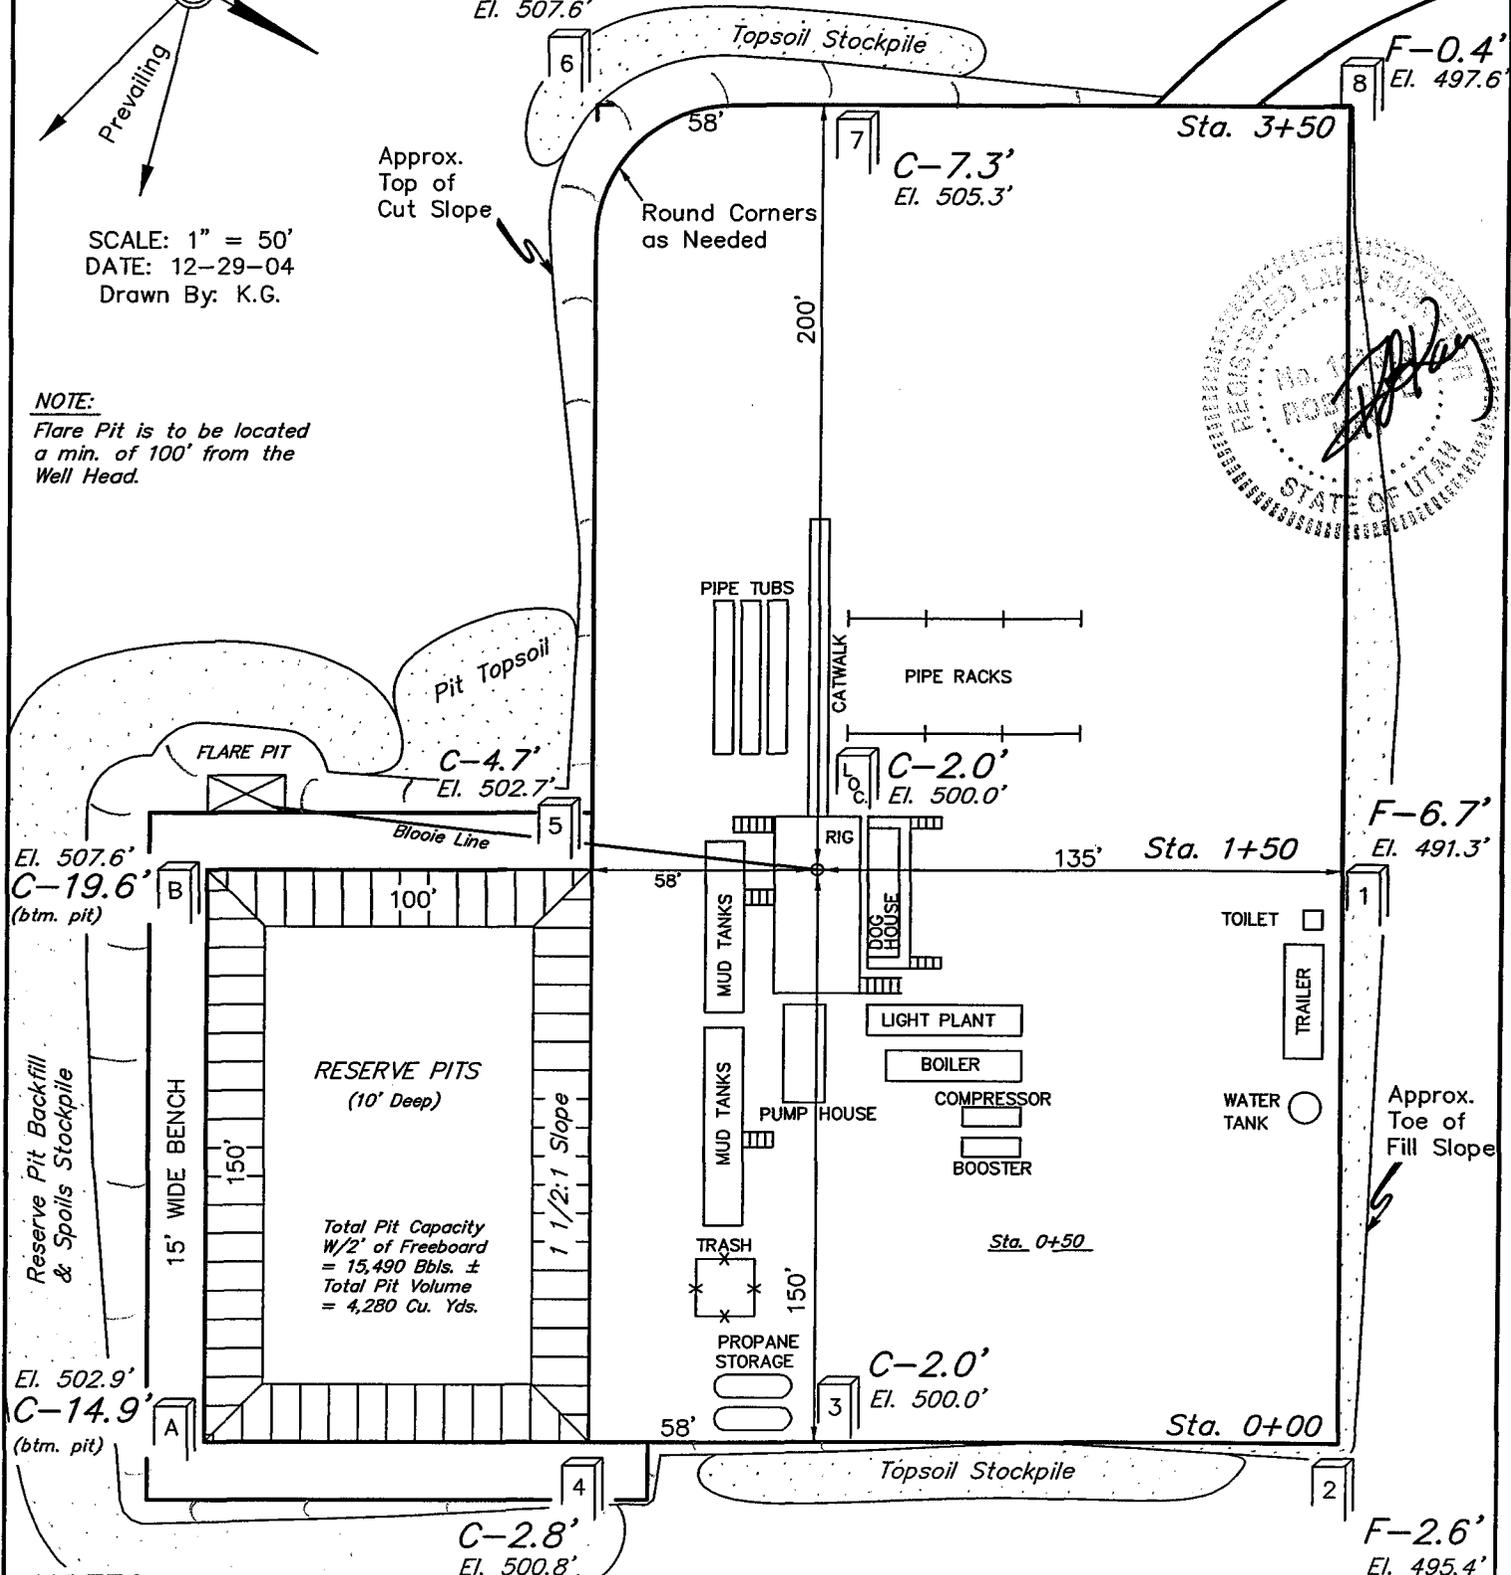

NOTES:

Elev. Ungraded Ground At Loc. Stake = 5500.0'
FINISHED GRADE ELEV. AT LOC. STAKE = 5498.0'

WESTPORT OIL AND GAS COMPANY, L.P.





FIGURE #2

TYPICAL CROSS SECTIONS FOR

STATE #1021-36P
SECTION 36, T10S, R21E, S.L.B.&M.
547' FSL 742' FEL

1" = 20'
X-Section Scale
1" = 50'

DATE: 12-29-04
Drawn By: K.G.

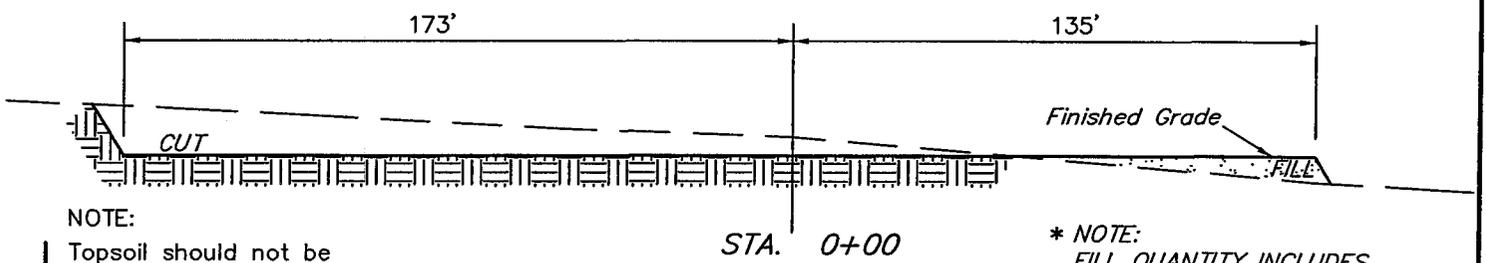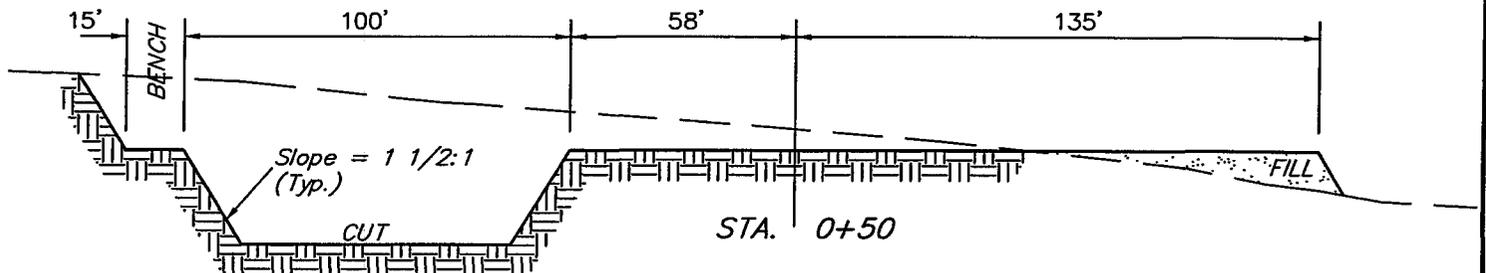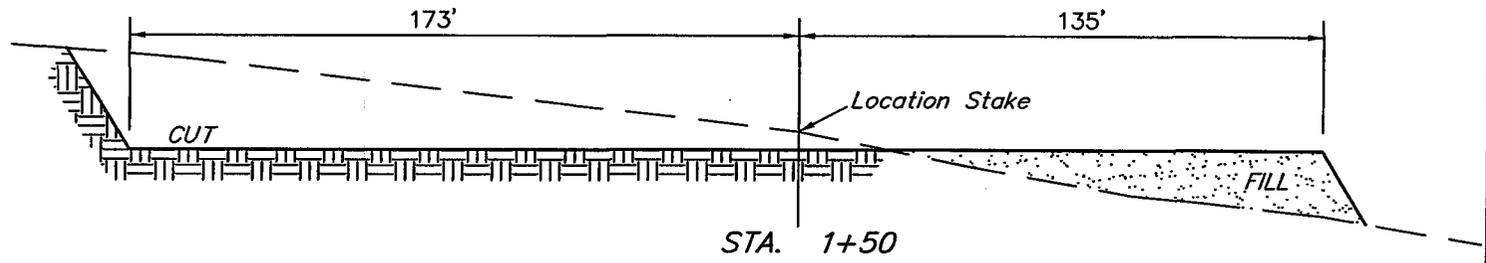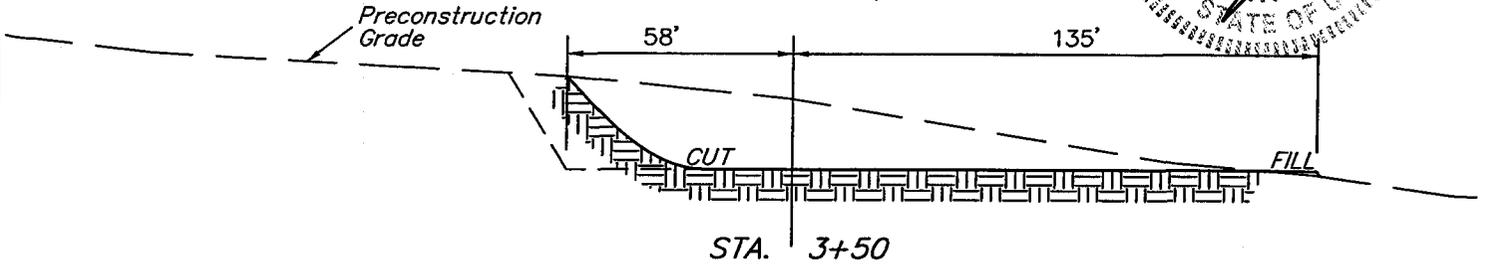

NOTE:

Topsoil should not be Stripped Below Finished Grade on Substructure Area.

* NOTE:

FILL QUANTITY INCLUDES 5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,890 Cu. Yds.
Remaining Location	= 12,640 Cu. Yds.
TOTAL CUT	= 14,530 CU.YDS.
FILL	= 4,840 CU.YDS.

EXCESS MATERIAL	= 9,690 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 4,030 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 5,660 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 03/18/2005

API NO. ASSIGNED: 43-047-36420

WELL NAME: STATE 1021-36P
OPERATOR: WESTPORT OIL & GAS CO (N2115)
CONTACT: DEBRA DOMENICI

PHONE NUMBER: 435-781-7060

PROPOSED LOCATION:

SESE 36 100S 210E
SURFACE: 0547 FSL 0742 FEL
BOTTOM: 0547 FSL 0742 FEL
UINTAH
NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering	DWD	4/15/05
Geology		
Surface		

LEASE TYPE: 3 - State
LEASE NUMBER: ML-47060
SURFACE OWNER: 3 - State
PROPOSED FORMATION: WSMVD
COALBED METHANE WELL? NO

LATITUDE: 39.89814
LONGITUDE: -109.4918

RECEIVED AND/OR REVIEWED:


- Plat
- Bond: Fed[] Ind[] Sta[] Fee[]
(No. RLB0005236)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 43-8496)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)

LOCATION AND SITING:


- ___ R649-2-3.
Unit _____
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- ___ R649-3-3. Exception
- ___ Drilling Unit
Board Cause No: _____
Eff Date: _____
Siting: _____
- ___ R649-3-11. Directional Drill

COMMENTS: Needs Presite (03-30-05)

STIPULATIONS: 1- Spacing Strip
2- STATEMENT OF BASIS
3- OIL SHALE

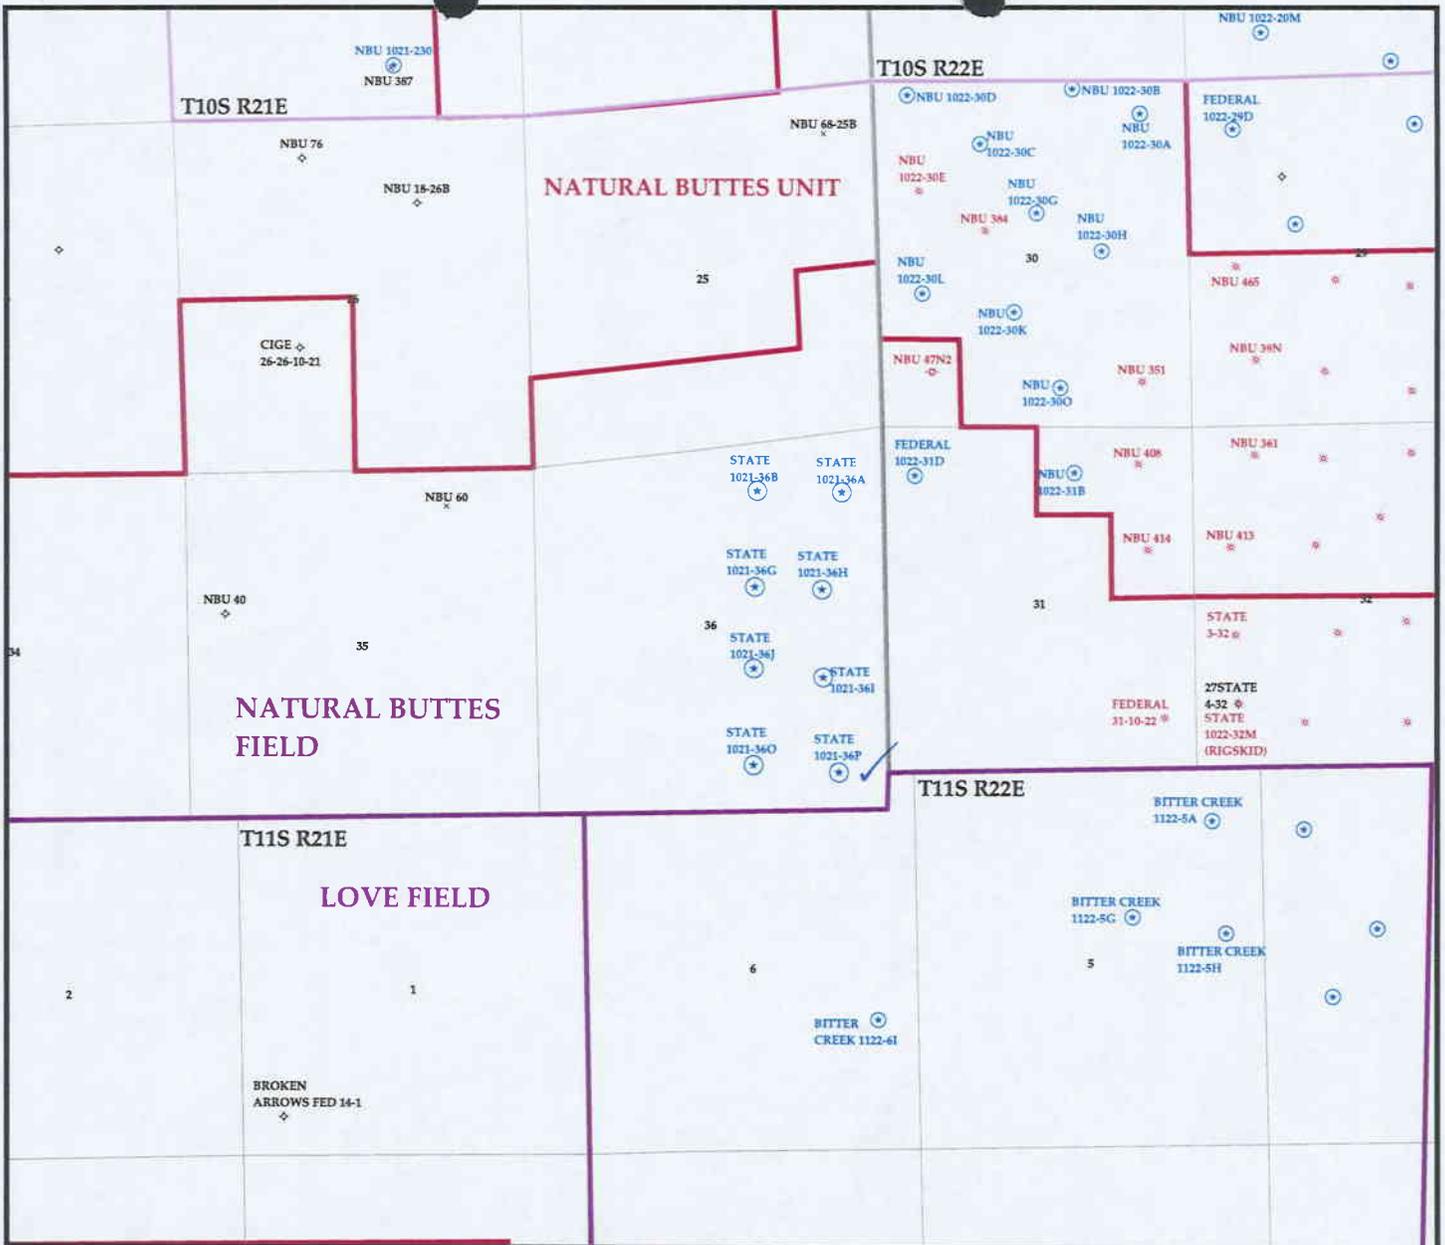

OPERATOR- WESTPORT O&G CO (N2115)
 SEC. 36 T.10S R.21E
 FIELD: NATURAL BUTTES (630)
 COUNTY: UINTAH
 SPACING: R649-3-2 / GENERAL SITING



Utah Oil Gas and Mining

Wells	Units.shp	Fields.shp
○ GAS INJECTION	□ EXPLORATORY	□ ABANDONED
○ GAS STORAGE	□ GAS STORAGE	□ ACTIVE
× LOCATION ABANDONED	□ NF PP OIL	□ COMBINED
⊙ NEW LOCATION	□ NF SECONDARY	□ INACTIVE
◇ PLUGGED & ABANDONED	□ PENDING	□ PROPOSED
✱ PRODUCING GAS	□ PI OIL	□ STORAGE
● PRODUCING OIL	□ PP GAS	□ TERMINATED
⊙ SHUT-IN GAS	□ PP GEOTHERML	
⊙ SHUT-IN OIL	□ PP OIL	
× TEMP. ABANDONED	□ SECONDARY	
○ TEST WELL	□ TERMINATED	
△ WATER INJECTION		
◆ WATER SUPPLY		
♣ WATER DISPOSAL		



PREPARED BY: DIANA WHITNEY
 DATE: 18-MARCH-2005

ON-SITE PREDRILL EVALUATION
Division of Oil, Gas and Mining

OPERATOR: Westport Oil and Gas Company L.P.
WELL NAME & NUMBER: State 1021-36P
API NUMBER: 43-047-36420
LEASE: ML-47060 FIELD/UNIT: Natural Buttes
LOCATION: 1/4,1/4 SE/SE Sec: 36 TWP: 10S RNG: 21E 547 FSL 742' FEL
LEGAL WELL SITING: 460 F SEC. LINE; 460 F 1/4,1/4 LINE; 920 F ANOTHER WELL.
GPS COORD (UTM): _____ SURFACE OWNER: STATE OF UTAH

PARTICIPANTS

Brad Hill (DOGM), Floyd Bartlett (DWR), Clay Einerson, Carroll Estes, (WESTPORT), David Kay (UELS).

REGIONAL/LOCAL SETTING & TOPOGRAPHY

Site is on a fairly flat hillside with a slight slope to the north. There is a small north trending drainage that runs through the center of the pad.

SURFACE USE PLAN

CURRENT SURFACE USE: Wildlife and livestock grazing, hunting.

PROPOSED SURFACE DISTURBANCE: Location will be 350' by 293'. Access road will require 2.2 miles of new construction. 1.9 miles of this road will be common with other proposed wells in this section.

LOCATION OF EXISTING WELLS WITHIN A 1 MILE RADIUS: See map included in well file.

LOCATION OF PRODUCTION FACILITIES AND PIPELINES: All production facilities will be on location and added after the well is drilled. Proposed pipeline will follow the access road and connect to an existing line in Section 31.

SOURCE OF CONSTRUCTION MATERIAL: All construction material will be Borrowed from site during construction of location.

ANCILLARY FACILITIES: None will be required.

WILL DRILLING AT THIS LOCATION GENERATE PUBLIC INTEREST OR CONCERNS?
(EXPLAIN): No

WASTE MANAGEMENT PLAN:

Drilled cuttings will be settled into reserve pit. Liquids from pit will be allowed to evaporate. Formation water will be confined to storage tanks. Sewage facilities, storage and disposal will be handled by commercial contractor. Trash will be contained in trash baskets and hauled to an approved landfill.

ENVIRONMENTAL PARAMETERS

AFFECTED FLOODPLAINS AND/OR WETLANDS: None

FLORA/FAUNA: Sage, Prickly pear, Barrel cactus, Shadscale, Vetch, Sparse grasses: Pronghorn, Rodents, Songbirds, Raptors, Coyote, Rabbits, Deer.

SOIL TYPE AND CHARACTERISTICS: Light brown silty clay with abundant rock fragments.

SURFACE FORMATION & CHARACTERISTICS: Uinta Formation and Quaternary Alluvium derived from the Uinta Formation.

EROSION/SEDIMENTATION/STABILITY: Very little natural erosion. Sedimentation and stability are not a problem and location construction shouldn't cause an increase in stability or erosion problems.

PALEONTOLOGICAL POTENTIAL: None observed.

RESERVE PIT

CHARACTERISTICS: 150' BY 100' and 10' deep. The pit will be placed in cut on a flat hill top. There is a minor N-E drainage to the east of the pit.

LINER REQUIREMENTS (Site Ranking Form attached): A 20 mil liner and felt subliner will be installed in the reserve pit.

SURFACE RESTORATION/RECLAMATION PLAN

As per SITLA.

SURFACE AGREEMENT: As per SITLA.

CULTURAL RESOURCES/ARCHAEOLOGY: Site has been inspected by Montgomery Archeological Consultants. A report of this investigation will be placed on file.

OTHER OBSERVATIONS/COMMENTS

This predrill investigation was conducted on a cool sunny day.

ATTACHMENTS

Photos of this site were taken and will be placed on file.

Brad Hill
DOGM REPRESENTATIVE

03-30-05, 12:45 PM
DATE/TIME

**Evaluation Ranking Criteria and Ranking Scale
For Reserve and Onsite Pit Liner Requirements**

<u>Site-Specific Factors</u>	<u>Ranking</u>	<u>Site Ranking</u>
Distance to Groundwater (feet)		
>200	0	
100 to 200	5	
75 to 100	10	
25 to 75	15	
<25 or recharge area	20	<u>5</u>
Distance to Surf. Water (feet)		
>1000	0	
300 to 1000	2	
200 to 300	10	
100 to 200	15	
< 100	20	<u>15</u>
Distance to Nearest Municipal Well (feet)		
>5280	0	
1320 to 5280	5	
500 to 1320	10	
<500	20	<u>0</u>
Distance to Other Wells (feet)		
>1320	0	
300 to 1320	10	
<300	20	<u>0</u>
Native Soil Type		
Low permeability	0	
Mod. permeability	10	
High permeability	20	<u>15</u>
Fluid Type		
Air/mist	0	
Fresh Water	5	
TDS >5000 and <10000	10	
TDS >10000 or Oil Base Mud Fluid	15	
containing significant levels of hazardous constituents	20	<u>5</u>
Drill Cuttings		
Normal Rock	0	
Salt or detrimental	10	<u>0</u>
Annual Precipitation (inches)		
<10	0	
10 to 20	5	
>20	10	<u>5</u>
Affected Populations		
<10	0	
10 to 30	6	
30 to 50	8	
>50	10	<u>0</u>
Presence of Nearby Utility Conduits		
Not Present	0	
Unknown	10	
Present	15	<u>0</u>

Final Score 45 (Level I Sensitivity)

Sensitivity Level I = 20 or more: total containment is required.

Sensitivity Level II = 15-19: lining is discretionary.

Sensitivity Level III = below 15: no specific lining is required.







**DIVISION OF OIL, GAS AND MINING
APPLICATION FOR PERMIT TO DRILL
STATEMENT OF BASIS**

OPERATOR: WESTPORT OIL AND GAS COMPANY, L.P.
WELL NAME & NUMBER: STATE 1021-36P
API NUMBER: 43-047-36420
LOCATION: 1/4,1/4 SE/SE Sec: 36 TWP: 10S RNG: 21E 547 FSL 742 FEL

Geology/Ground Water:

Westport proposes to set 1,800' of surface casing at this location. The depth to the base of the moderately saline water at this location is estimated to be at a depth of 3,400'. A search of Division of Water Rights records shows no water wells within a 10,000 foot radius of the center of Section 36. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be a significant source of useable ground water.

Reviewer: Brad Hill **Date:** 04/05/05

Surface:

The predrill investigation of the surface was performed on 03/30/05. Floyd Bartlett with DWR and Ed Bonner with SITLA were invited to this investigation on 03/22/05. Ed Bonner from SITLA did not attend. DWR had no significant concerns regarding the construction of this location or the drilling of the well. Mr. Bartlett stated that a sage grouse lek is located about 2 miles to the south but that this well should have no effect on the lek. This site is on State surface, with State minerals, and appears to be the best site for a location in the immediate area. There are numerous sandstone outcroppings on the slopes below this site. Mr. Estes stated that they would be installing a 20 mil liner with a felt subliner in the reserve pit.

Reviewer: Brad Hill **Date:** 04/05/05

Conditions of Approval/Application for Permit to Drill:

1. A synthetic liner with a minimum thickness of 20 mils and a felt subliner shall be properly installed and maintained in the reserve pit.
2. The entire pad shall be bermed to prevent any fluids from leaving the location.

Well name:

04-05 Westport State 1021-361

Operator: **Westport Oil & Gas**

String type: **Surface**

Project ID:
43-047-36420

Location: **Uintah County**

Design parameters:

Collapse

Mud weight: 8.400 ppg
Design is based on evacuated pipe.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Environment:

H2S considered? No
Surface temperature: 75 °F
Bottom hole temperature: 100 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 1,500 ft

Cement top: 441 ft

Burst

Max anticipated surface pressure: 1,584 psi
Internal gradient: 0.120 psi/ft
Calculated BHP 1,800 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)

Tension is based on buoyed weight.
Neutral point: 1,578 ft

Non-directional string.

Re subsequent strings:

Next setting depth: 8,600 ft
Next mud weight: 10.000 ppg
Next setting BHP: 4,468 psi
Fracture mud wt: 19.250 ppg
Fracture depth: 1,800 ft
Injection pressure 1,800 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	1800	9.625	32.30	H-40	ST&C	1800	1800	8.876	114.1
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	785	1370	1.744	1800	2270	1.26	51	254	4.98 J

Prepared by: Clinton Dworshak
Utah Div. of Oil & Mining

Phone: 801-538-5280
FAX: 801-359-3940

Date: April 6, 2005
Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 1800 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Well name:

04-05 Westport State 1021-36I

Operator: **Westport Oil & Gas**

String type: Production

Project ID:

43-047-36420

Location: Uintah County

Design parameters:

Collapse

Mud weight: 10.000 ppg
Design is based on evacuated pipe.

Minimum design factors:

Collapse:

Design factor 1.125

Environment:

H2S considered? No
Surface temperature: 75 °F
Bottom hole temperature: 195 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 1,500 ft

Burst:

Design factor 1.00

Cement top: Surface

Burst

Max anticipated surface pressure: 3,435 psi
Internal gradient: 0.120 psi/ft
Calculated BHP 4,467 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)

Non-directional string.

Tension is based on buoyed weight.
Neutral point: 7,314 ft

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft ³)
1	8600	4.5	11.60	M-80	LT&C	8600	8600	3.875	199.3
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	4467	6350	1.421	4467	7780	1.74	85	267	3.15 B

Prepared by: Clinton Dworshak
Utah Div. of Oil & Mining

Phone: 801-538-5280
FAX: 801-359-3940

Date: April 6, 2005
Salt Lake City, Utah


Remarks:

Collapse is based on a vertical depth of 8600 ft, a mud weight of 10 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

04-05 Westport State 1021-3
Casing Schematic

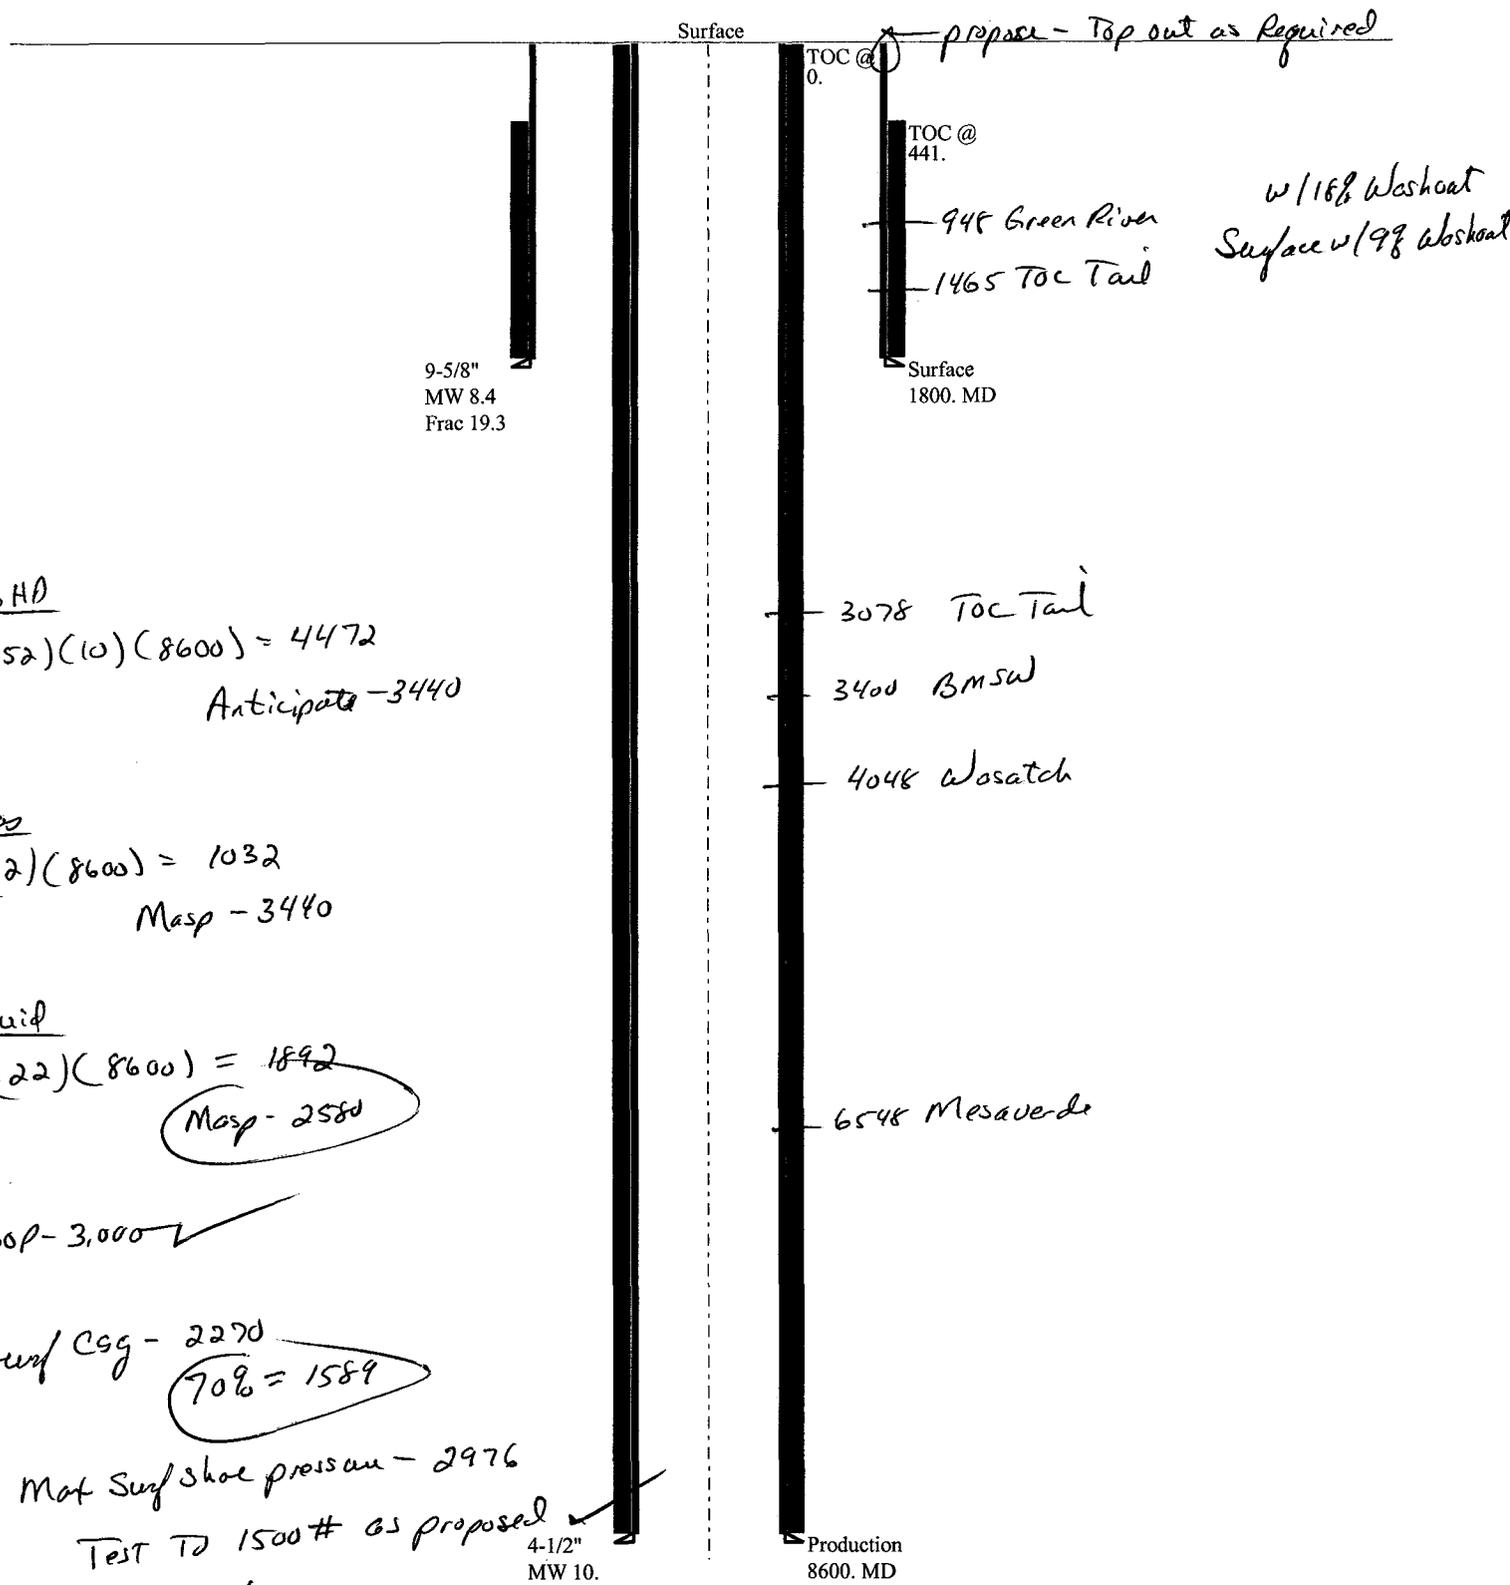

BHD
 $(.052)(10)(8600) = 4472$
 Anticipate - 3440

Gas
 $(.12)(8600) = 1032$
 Masp - 3440

fluid
 $(.22)(8600) = 1892$
 Masp - 2580

BOP - 3,000 ✓

Surf csg - 2270
 70% = 1589

Mat Surf shoe pressure - 2976
 Test to 1500# as proposed
 4-1/2" MW 10.

✓ Adequate D&D 4/15/05

3078 TOC Tail
 3400 BMSW
 4048 Wasatch
 6548 Mesaverde

w/16% Washcoat
 Surface w/9% Washcoat

From: Ed Bonner
To: Whitney, Diana
Date: 4/6/2005 4:10:32 PM
Subject: Well Clearance

The following wells have been given cultural resource clearance by the Trust Lands Cultural Resources Group:

Westport Oil & Gas Company

NBU 921-33F
NBU 921-33G
NBU 921-33I
NBU 921-33J
NBU 921-33K
NBU 921-33P
NBU 921-34H
NBU 921-34K
NBU 921-34L
NBU 1022-12I
NBU 1022-12P
State 1021-36A
State 1021-36B
State 1021-36G
State 1021-36H
State 1021-36I
State 1021-36J
State 1021-36O
State 1021-36P

If you have any questions regarding this matter please give me a call.

CC: Garrison, LaVonne; Hill, Brad; Hunt, Gil

**State of Utah****Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

MARY ANN WRIGHT
Acting Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

April 18, 2005

Westport Oil & Gas Company, LP
1368 South 1200 East
Vernal, Utah 84078


Re: State 1021-36P Well, 547' FSL, 742' FEL, SE SE, Sec. 36, T. 10 South,
R. 21 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-36420.

Sincerely,



John R. Baza
Associate Director

jc
Enclosures

cc: Uintah County Assessor
SITLA

Operator: Westport Oil & Gas Company, LP
Well Name & Number State 1021-36P
API Number: 43-047-36420
Lease: ML-47060

Location: SE SE **Sec.** 36 **T.** 10 South **R.** 21 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for Permit to Drill.

2. Notification Requirements

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- 24 hours prior to cementing or testing casing
- 24 hours prior to testing blowout prevention equipment
- 24 hours prior to spudding the well
- within 24 hours of any emergency changes made to the approved drilling program
- prior to commencing operations to plug and abandon the well

The following are Division of Oil, Gas and Mining contacts and their work telephone numbers (please leave a voice mail message if the person is not available to take the call):

- Dan Jarvis at (801) 538-5338
- Carol Daniels at (801) 538-5284 (spud)

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. Compliance with the State of Utah Antiquities Act forbids disturbance of archeological, historical, or paleontological remains. Should archeological, historical or paleontological remains be encountered during your operations, you are required to immediately suspend all operations and immediately inform the Trust Lands Administration and the Division of State History of the discovery of such remains.

5. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)

6. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

Page 2

API # 43-047-36420

April 18, 2005

7. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-47060
2. NAME OF OPERATOR: WESTPORT OIL AND GAS COMPANY LP		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: 1368 SOUTH 1200 EAST CITY VERNAL STATE UT ZIP 84078		7. UNIT or CA AGREEMENT NAME:
PHONE NUMBER: 781-7003		8. WELL NAME and NUMBER: STATE 1021-36P
4. LOCATION OF WELL FOOTAGES AT SURFACE: 547' FSL, 742' FEL		9. API NUMBER: 4304736420
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 36 10S 21E		10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES
COUNTY: UINTAH		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____ <input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>APD EXTENSION</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

THE OPERATOR REQUESTS AUTHORIZATION FOR AN ONE YEAR EXTENSION FOR THE SUBJECT WELL LOCATION. SO THAT THE DRILLING OPERATIONS MAY BE COMPLETED. THE ORIGINAL APD WAS APPROVED BY THE DIVISION OF OIL, GAS, AND MINING DEPARTMENT ON APRIL 18, 2005.

**Approved by the
Utah Division of
Oil, Gas and Mining**
Date: 04-13-06
By: [Signature]

NAME (PLEASE PRINT) RAMEY HOOPES	TITLE REGULATORY CLERK
SIGNATURE <u>Ramey Hoopes</u>	DATE 3/21/2006

(This space for State use only)

RECEIVED
APR 12 2006

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304736420
Well Name: STATE 1021-36P
Location: SESE, SEC 36-T10S-R21E
Company Permit Issued to: Westport Oil and Gas Company LP
Date Original Permit Issued: 4/18/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No


Signature

3/21/2006
Date

Title: REGULATORY CLERK

Representing: Westport Oil and Gas Company LP

RECEIVED

APR 12 2006

DIV. OF OIL, GAS & MINING

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

Name of Company: WESTPORT OIL & GAS COMPANY LP

Well Name: STATE 1021-36P

Api No: 43-047-36420 Lease Type: STATE

Section 36 Township 10S Range 21E County UINTAH

Drilling Contractor ROCKY MOUNTAIN DRILLING RIG # 1

SPUDDED:

Date 05/05/06

Time 10:00 AM

How DRY

Drilling will Commence: _____

Reported by LOU WELDON

Telephone # (435) 828-7035

Date 05/05/2006 Signed CHD

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: KERR MCGEE OIL & GAS ONSHORE LP
Address: 1368 SOUTH 1200 EAST
city VERNAL
state UT zip 84078

Operator Account Number: N2995
Phone Number: (435) 781-7024

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304737777	NBU 1022-180		SWSE	18	10S	22E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
B	99999	2900	5/4/2006		5/18/06		
Comments: MIRU PETE MARTIN BUCKET RIG. <i>WSTMVD</i> SPUD WELL LOCATION ON 05/04/2006 AT 1200 HRS. — K							

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304736420	STATE 1021-36P		SESE	36	10S	21E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
A	99999	15372	5/5/2006		5/18/06		
Comments: MIRU ROCKY MTN BUCKET RIG. <i>WSTMVD</i> SPUD WELL LOCATION ON 05/05/2006 AT 1000 HRS. — K							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
Comments:							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

SHEILA UPCHEGO

Name (Please Print)

[Signature]

Signature

REGULATORY ANALYST

5/9/2006

Title

RECEIVED

MAY 09 2006

(5/2000)

To: <u>EARLENE RUSSELL</u>	From: <u>SHEILA UPCHEGO</u>
Co./Dept: <u>UTDOG M</u>	<u>KERR-MCGEE OIL & GAS CO</u>
Phone: <u>(801) 538-5336</u>	Phone: <u>(435) 781-7024</u>
Fax #: <u>(801) 780-2011</u>	Fax #: <u>(435) 781-7094</u>

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER:
ML-47060

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

8. WELL NAME and NUMBER:
STATE 1021-36P

9. API NUMBER:
4304736420

10. FIELD AND POOL, OR WILDCAT:
NATURAL BUTTES

1. TYPE OF WELL OIL WELL GAS WELL OTHER _____

2. NAME OF OPERATOR:
KERR MCGEE OIL & GAS ONSHORE LP

3. ADDRESS OF OPERATOR: CITY STATE ZIP PHONE NUMBER:
1368 S. 1200 E. VERNAL UT 84078 (435) 781-7024

4. LOCATION OF WELL

FOOTAGES AT SURFACE: **547'FSL, 742'FEL** COUNTY: **UINTAH**

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: **SESE 36 10S 21E** STATE: **UTAH**

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: WELL SPUD
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

MIRU ROCKY MTN BUCKET RIG. DRILLED 20" CONDUCTOR HOLE TO 40'. RAN 14" 36.7# SCHEDULE 10 PIPE. CMT W/28 SX READY MIX CMT.

SPUD WELL LOCATION ON 05/05/2006 AT 1000 HRS.

NAME (PLEASE PRINT) **SHEILA UPCHEGO** TITLE **REGULATORY ANALYST**

SIGNATURE  DATE **5/9/2006**

(This space for State use only)

RECEIVED
MAY 15 2006
DIV. OF OIL, GAS & MINING

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING

1. DJJ
2. CDW

X Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

1/6/2006

FROM: (Old Operator): N2115-Westport Oil & Gas Co., LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024	TO: (New Operator): N2995-Kerr-McGee Oil & Gas Onshore, LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024
---	--

CA No.

Unit:

WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
-----------	-----	-----	-----	--------	-----------	------------	-----------	-------------

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 5/10/2006
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 5/10/2006
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- a. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- b. If **NO**, the operator was contacted on:
- 5a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- 5b. Inspections of LA PA state/fee well sites complete on: n/a
- 5c. Reports current for Production/Disposition & Sundries on: ok
- 6. Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 3/27/2006 BIA not yet

7. Federal and Indian Units:

The BLM or BIA has approved the successor of unit operator for wells listed on: 3/27/2006

8. Federal and Indian Communization Agreements ("CA"):

The BLM or BIA has approved the operator for all wells listed within a CA on: n/a

9. Underground Injection Control ("UIC") The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on:

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 5/15/2006
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 5/15/2006
- Bond information entered in RBDMS on: 5/15/2006
- Fee/State wells attached to bond in RBDMS on: 5/16/2006
- Injection Projects to new operator in RBDMS on: _____
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a Name Change Only

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: CO1203
- Indian well(s) covered by Bond Number: RLB0005239
- (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0005236
- a. The **FORMER** operator has requested a release of liability from their bond on: n/a rider added KMG
The Division sent response by letter on: _____

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 5/16/2006

COMMENTS:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

KERR-McGEE OIL & GAS ONSHORE LP

3a. Address

1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEE ATTACHED

8. Well Name and No.

MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State

UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

PLEASE BE ADVISED THAT KERR-McGEE OIL & GAS ONSHORE LP, IS CONSIDERED TO BE THE OPERATOR OF THE ATTACHED WELL LOCATIONS. EFFECTIVE JANUARY 6, 2006. KERR-McGEE OIL & GAS ONSHORE LP, IS RESPONSIBLE UNDER TERMS AND CONDITIONS OF THE LEASE(S) FOR THE OPERATIONS CONDUCTED UPON LEASE LANDS. BOND COVERAGE IS PROVIDED BY STATE OF UTAH NATIONWIDE BOND NO. RLB0005237.

RECEIVED

MAY 10 2006

DIV. OF OIL, GAS & MINING

BLM BOND = C01203
BIA BOND = RLB0005239

APPROVED 5/16/06
Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

RANDY BAYNE

Title

DRILLING MANAGER

Signature

Randy Bayne

Date

May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

8. Well Name and No.

MUTIPLE WELLS

2. Name of Operator

WESTPORT OIL & GAS COMPANY L.P.

9. API Well No.

3a. Address

1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7024

10. Field and Pool, or Exploratory Area

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEE ATTACHED

11. County or Parish, State

UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

EFFECTIVE JANUARY 6, 2006, WESTPORT OIL & GAS COMPANY L.P., HAS RELINQUISHED THE OPERATORSHIP OF THE ATTACHED WELL LOCATIONS TO KERR-McGEE OIL & GAS ONSHORE LP.

APPROVED 5/16/06
Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

RECEIVED
MAY 10 2006

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

BRAD LANEY

Title

ENGINEERING SPECIALIST

Signature

Date

May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by <i>Brad Laney</i>	Title	Date 5-9-06
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS			5. LEASE DESIGNATION AND SERIAL NUMBER: ML-47060
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.			6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____			7. UNIT or CA AGREEMENT NAME:
2. NAME OF OPERATOR: KERR MCGEE OIL & GAS ONSHORE LP			8. WELL NAME and NUMBER: STATE 1021-36P
3. ADDRESS OF OPERATOR: 1368 SOUTH 1200 EAST CITY VERNAL STATE UT ZIP 84078		PHONE NUMBER: (435) 781-7024	9. API NUMBER: 4304736420
4. LOCATION OF WELL FOOTAGES AT SURFACE: 547'FSL, 742'FEL			10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 36 10S 21E			COUNTY: UINTAH
			STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>SET SURFACE CSG</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

MIRU BILL MARTIN AIR RIG ON 05/10/2006. DRILLED 12 1/4" SURFACE HOLE TO 1860'. RAN 9 5/8" 32.3# H-40 SURFACE CSG. LEAD CMT W/150 SX HIFILL CLASS G @11.0 PPG 3.82 YIELD. TAILED CMT W/200 SX PREM CLASS G @15.8 PPG 1.15 YIELD. GOOD RETURNS +/- 30 BBLS LEAD CMT TO PIT. 1ST TOP OUT W/125 SX CLASS G @15.8 PPG 1.15 YIELD. GOOD CMT TO SURFACE AND FELL BACK 2ND TOP OUT W/100 SX DOWN BACKSIDE CMT TO SURFACE HOLE STAYED FULL.

WORT

NAME (PLEASE PRINT) <u>SHEILA UPCHEGO</u>	TITLE <u>REGUALTORY ANALYST</u>
SIGNATURE	DATE <u>5/15/2006</u>

(This space for State use only)

RECEIVED
MAY 19 2006
DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

5. LEASE DESIGNATION AND SERIAL NUMBER:
ML-47060

SUNDRY NOTICES AND REPORTS ON WELLS

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

7. UNIT or CA AGREEMENT NAME:

8. WELL NAME and NUMBER:
STATE 1021-36P

9. API NUMBER:
4304736420

10. FIELD AND POOL, OR WILDCAT:
NATURAL BUTTES

1. TYPE OF WELL OIL WELL GAS WELL OTHER _____

2. NAME OF OPERATOR:
KERR MCGEE OIL & GAS ONSHORE LP

3. ADDRESS OF OPERATOR:
1368 SOUTH 1200 EAST CITY VERNAL STATE UT ZIP 84078

PHONE NUMBER:
(435) 781-7024

4. LOCATION OF WELL
FOOTAGES AT SURFACE: **547FSL, 742'FEL**

COUNTY: **UINTAH**

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: **SESE 36 10S 21E**

STATE: **UTAH**

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: FINAL DRILLING OPERATIONS
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

FINISHED DRILLING FROM 1860' TO 8552' ON 07/09/2006. RAN 4 1/2" 11.6# I-80 PRODUCTION CSG. LEAD CMT W/380 SX PREM LITE II @11.1 PPG 3.25 YIELD. TAILED CMT W/1740 SX 50/50 POZ @14.3 PPG 1.31 YIELD. NIPPLE DOWN CUT OFF CSG SET CSG SLIPS W/85K STRING WT. CLEAN PITS.

RELEASED ENSIGN RIG 81 ON 07/09/2006 AT 1400 HRS.


NAME (PLEASE PRINT) **SHEILA UPCHEGO**

TITLE **REGULATORY ANALYST**

SIGNATURE 

DATE **7/10/2006**

(This space for State use only)



STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS			5. LEASE DESIGNATION AND SERIAL NUMBER: ML-47060
			6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.			7. UNIT or CA AGREEMENT NAME:
			8. WELL NAME and NUMBER: STATE 1021-36P
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____	2. NAME OF OPERATOR: KERR MCGEE OIL & GAS ONSHORE LP		9. API NUMBER: 4304736420
3. ADDRESS OF OPERATOR: 1368 SOUTH 1200 EAST CITY VERNAL STATE UT ZIP 84078		PHONE NUMBER: (435) 781-7024	10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL FOOTAGES AT SURFACE: 547FSL, 742'FEL			COUNTY: UINTAH
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 36 10S 21E			STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: PRODUCTION START-UP
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

THE SUBJECT WELL LOCATION WAS PLACED ON PRODUCTION ON 07/31/2006 AT 11:30 AM.

PLEASE REFER TO THE ATTACHED CHRONOLOGICAL WELL HISTORY.

NAME (PLEASE PRINT) SHEILA UPCHEGO	TITLE REGULATORY ANALYST
SIGNATURE	DATE 8/2/2006

(This space for State use only)

RECEIVED

AUG 21 2006
(See Instructions on Reverse Side)

(5/2000)

DIV. OF OIL, GAS & MINING

KERR MCGEE OIL & GAS ONSHORE, LP

CHRONOLOGICAL HISTORY

STATE 1021-36P

	SPUD	Surface Casing	Activity	Status
04/13/06			Build Location, 20% Complete	Caza 81
04/17/06			Build Location, 35% Complete	Caza 81
04/18/06			Build Location, 40% Complete	Caza 81
04/19/06			Build Location, 50% Complete	Caza 81
04/20/06			Build Location, 60% Complete	Caza 81
04/21/06			Build Location, 60% Complete, DRL	Caza 81
04/24/06			Build Location, 60% Complete, DRL	Caza 81
04/25/06			Build Location, 60% Complete, DRL	Caza 81
04/26/06			Build Location, 60% Complete, DRL	Caza 81
04/27/06			Build Location, 60% Complete, DRL	Caza 81
04/28/06			Build Location, 65% Complete	Caza 81
05/01/06			Build Location, 85% Complete	Caza 81
05/02/06			Build Location, 90% Complete	Caza 81
05/03/06			Build Location, 95% Complete	Caza 81
05/04/06			Build Location, 95% Complete	Caza 81
05/05/06			Location Complete.	Caza 81
05/12/06	5/5/06 5/10/06		Set conductor, Air rig spud, Drlg	Caza 81
05/15/06	5/10/06	9 5/8" @ 1790'	WORT	Caza 81
05/22/06	5/10/06	9 5/8" @ 1790'	Ring in, WORT	Caza 81
06/07/06	TD: 1860'	Csg. 9 5/8" @ 1826'	MW: 8.3 RDRT and move rig to State 1021-36P. Spot rig and RURT.	SD: 6/XX/06 DSS: 0

06/08/06 TD: 1977' Csg. 9 5/8" @ 1826' MW: 8.3 SD: 6/8/06 DSS: 0
Finish RURT. NU and test BOPE. PU BHA and DP and drill FE. Drill from 1860'-1977'.
DA @ report time.

06/09/06 TD: 3440' Csg. 9 5/8" @ 1826' MW: 8.4 SD: 6/8/06 DSS: 2
Drill and survey from 1977'-3440'. DA @ report time.

06/12/06 TD: 6022' Csg. 9 5/8" @ 1826' MW: 10.3 SD: 6/8/06 DSS: 5
Drill and survey from 3440'-3730'. POOH to shoe and replace hydraulic pump. TIH and drill
from 3730'-6022'. DA @ report time.

06/13/06 TD: 6780' Csg. 9 5/8" @ 1826' MW: 10.4 SD: 6/8/06 DSS: 6
Drill from 6022'-6780'. DA @ report time.

06/14/06 TD: 7410' Csg. 9 5/8" @ 1826' MW: 10.4 SD: 6/8/06 DSS: 7
Drill from 6780'-7410'. DA @ report time.

06/15/06 TD: 7938' Csg. 9 5/8" @ 1826' MW: 10.6 SD: 6/8/06 DSS: 8
Drill from 7410'-7938'. Slug pipe and TFNB @ report time.

06/16/06 TD: 7938' Csg. 9 5/8" @ 1826' MW: 10.7 SD: 6/8/06 DSS: 9
POOH to 2663'. Pipe stuck. Circulate and work stuck pipe. Pick up surface jars and jar on
pipe. Run freepoint and back off @2187'. PU fishing tools. Screw into fish and jar on fish
@ report time.

06/19/06 TD: 7938' Csg. 9 5/8" @ 1826' MW: 10.7 SD: 6/8/06 DSS: 9
Jar on fish. No movement. Back off and POOH. PU wash pipe and wash over fish from
2212'-2450'. CCH and POOH. Lost #1 pump and #2 pump. Replace both pumps with F-
1000 pump. Plumb in new pump. Unable to get charge pump running. TIH and screw into
fish. Jar on fish. Moved fish 2' down hole. RU and run free point @ report time. Callout
BJ to circulate hole.

06/20/06 TD: 7938' Csg. 9 5/8" @ 1826' MW: 10.7 SD: 6/8/06 DSS: 1
RU and run free point and back off at top of DC. Circulate with BJ and POOH into shoe.
Move out back of rig and install #1 pump. FOOH and lay down fishing tools. PU wash pipe
and start in hole @ report time.

06/21/06 TD: 7938' Csg. 9 5/8" @ 1826' MW: 10.7 SD: 6/8/06 DSS: 14
FIH w/wash pipe and wash over fish to 2481'. POOH and lay down wash pipe. TIH with
DP, screw into fish and freepoint. 100% stuck @ 2256'. Prepare to displace hole from 2240'
with 9.4 ppg mud @ report time.

06/22/06 TD: 7938' Csg. 9 5/8" @ 1826' MW: 10.7 SD: 6/8/06 DSS: 14
Displace hole from 2240' with 9.4 ppg mud. Spot diesel pill around fish. Jar on fish. RIH
w/freepoint and string shot and back off @ 2371'. POOH and lay down fish. Recovered 4
drill collars. PU wash pipe and TIH @ report time.

06/23/06 TD: 7938' Csg. 9 5/8" @ 1826' MW: 10.3 SD: 6/8/06 DSS: 15
TIH w/ wash pipe and w/o f/ 2365'-2527'. (top of stabilizer) POOH, PU fishing tools, and
TIH. Screw into fish and run FP. Pipe stuck at 2396'. PU kelly and circ and jar while
waiting on diesel. Spot diesel and pipe free @ report time.

06/26/06 TD: 7938' Csg. 9 5/8" @ 1826' MW: 10.3 SD: 6/8/06 DSS: 18
RIH w/ wireline. Pipe free to 2492'. Back off at 2492' recovering 4 DC. TIH w/ wash pipe
and start to wash over IBS. Took four shoes to wash over stabilizer. Washed down to 2630'

which is ±9' below IBS when shoe stopped drilling. POOH and left 3 jts of wash pipe in hole. Top of DC ±2492' and top of wash pipe ±2535'. TIH w/ screw in sub and drilling jars to prep for free point and back off @ report time.

06/27/06 TD: 7938' Csg. 9 5/8" @ 1826' MW: 10.3 SD: 6/8/06 DSS: 20
TIH w/ screw in sub and drilling jars and back off drill collars @ 2589'. POOH and lay down fish. RIH with spear and engage wash pipe @ 2535'. Pull 200K with no movement. Release spear and POOH. Pick up spear stop and TIH. Engage fish and pull 100K. Spear pulled out. Attempt to engage fish without success. POOH for new grapple @ report time.

06/28/06 TD: 7938' Csg. 9 5/8" @ 1826' MW: 10.3 SD: 6/8/06 DSS: 20
Change out grapple and TIH. Attempt to spear into wash pipe. Would not engage fish. POOH and make up 6' spear extension. TIH and engage fish. Jar on wash pipe, fish came free. POOH and lay down fish. Make up wash pipe and TIH. Wash over remaining fish from 2575'-2642'. @ report time. Stabilizer @ 2621', bit @ 2663'.

06/29/06 TD: 7938' Csg. 9 5/8" @ 1826' MW: 10.4 SD: 6/8/06 DSS: 21
Washover fish f/ 2642'-2663'. Spot pipe free and POOH. Left 2 jts wash pipe in hole. PU spear and TIH and fish wash pipe. POOH and LD wash pipe. PU BHA w/ screw in sub and TIH. Screw into fish and pull 55K over to free fish. TOOH w/ fish @ report time.

06/30/06 TD: 7938' Csg. 9 5/8" @ 1826' MW: 10.4 SD: 6/8/06 DSS: 23
POOH L/D fishing tools & fish, P/U bit inspect BHA break circulation @ shoe. Pump #2 down stay in casing until both pumps are working. Waiting on parts for repair @ report time

07/03/06 TD: 7938' Csg. 9 5/8" @ 1826' MW: 11.4 SD: 6/8/06 DSS: 25
Wait on parts. Stage in hole to 3757'. W&R 3757'-3957'. Stage in hole to 4681'. W&R 4681'-5570'. Stage in hole and W&R to 6208'. TOOH to c/o MM. TIH @ report time

07/05/06 TD: 7942' Csg. 9 5/8" @ 1826' MW: 11.4 SD: 6/8/06 DSS: 27
Finish TIH. W&R f/ 6203'-7938'. Drill to 7942' w/ no signs of junk on btm. Trip for PDC bit @ report time

07/06/06 TD: 8238' Csg. 9 5/8" @ 1826' MW: 11.5 SD: 6/8/06 DSS: 28
LD 20 jts of drill pipe. Finish bit trip. Strap in hole. Drill f/ 7942'-8238'. DA @ report time

07/07/06 TD: 8475' Csg. 9 5/8" @ 1826' MW: 11.5 SD: 6/8/06 DSS: 29
Drill f/ 8238'-8475'. DA @ report time.

07/10/06 TD: 8552' Csg. 9 5/8" @ 1826' MW: 11.5 SD: 6/8/06 DSS: 32
Drill f/ 8475'-8552'. CCH and short trip. POOH and run logs. TIH, CCH, and LDDS. Run and cmt 4.5" csg. Set slips, NDBOP, and rls rig 1400 hrs on 7/9/06. Will move on 7/12/06. Rig on repair @ report time.

07/11/06 TD: 8552' Csg. 9 5/8" @ 1826' MW: 11.5 SD: 6/8/06 DSS: 32
Repair rig. Will move on 7/12/06.

07/12/06 TD: 8552' Csg. 9 5/8" @ 1826' MW: 11.5 SD: 6/8/06 DSS: 32
Repair rig. Will move to Federal 1022-33M this am.

07/24/06 PROG: MIRU NIPPLE BOP TALLY & PICK UP 2,3/8 TBG TAG 8500' POOH SDFN

07/25/06 PROG: MIRU CUTTERS LOG CBL-CCL PERF @

07/26/06

PROG: MIRU SCHLUNBERGER - CUTTERS & FRAC

STAGE#1 BRK PERF @ 5186# INJ RT 51.2 BPM INJ PSI 6100# ISIP 3200# FG .83 FRAC W/
17800# 30/50 SAND + 750 BBL OF SLICKWATER MP 7719# MR 51.4 BPM AP 5961# AR 40
BPM ISIP 2880# FG .79 NPI -320#

STAGE # 2 RIH SET 8K CBP @ 8085' PERF @ 7973'-75' 3 SPF 8023'-28' 3 SPF 8048'-55' 3 SPF
BRK PERF @4082# INJ RT 51.7 BPM INJ PSI 5400# ISIP 2400# FG .74 FRAC W/ 68800#
30/50 SAND + 1832 BBL OF SLICKWATER MP 6525# MR 52.2 BPM AP 4723# AR 49.7
BPM ISIP 2900# FG .80 NPI 500#

STAGE # 3 RIH SET 8K CBP @7895' PERF @ 7813'-16' 4 SPF 7843'-48' 3 SPF 7861'-65' 4 SPF
BRK PERF @ 6850# INJ RT 45 BPM INJ PSI 5650# ISIP 2900# FG .81 FRAC W/ 20700#
30/50 SAND + 625 BBL OF SLICKWATER MP 6220# MR 50 BPM AP 4581 AR 43.3 BPM #
ISIP 2450# FG .75 NPI -450#

STAGE # 4 RIH SET 8K CBP @ 7020' PERF @ 7554'-60' 3 SPF 7648'-52' 3 SPF 7668'-72' 3 SPF
BRK PERF @ 7500# INJ RT 52 BPM INJ PSI 5100# ISIP 2400# FG .75 FRAC W/ 86300#
30/50 SAND + 2268 BBL OF SLICKWATER MP 5564# MR 52.3 BPM AP 3773# AR 50.4 ISIP
2580# FG .78 NPI 180#

STAGE #5 RIH SET 8K CBP @7402' PERF @ 7362'-72' 4 SPF BRK PERF @ 4013# INJ RT 52
BPM INJ PSI 4650# ISIP 1550# FG .65 FRAC W/ 45750# 30/50 SAND + 1253 BBL OF
SLICKWATER MP 4679# MR 55.1 BPM AP 3739# AR 49.3 BPM ISIP 2550# FG .78 NPI
1000#

STAGE #6 RIH SET 8K CBP @ 7223' PERF @ 7038'-42' 4 SPF 7073'-75' 3 SFF 7169'-73' 3 SPF
7190'93' 3 SPF BRK PERF @ 3593# INJ RT 50 BPM INJ PSI 4500# ISIP 1600# FG .66 FRAC
W/ 50350+ 1358 BBL FO SLICKWATER MP4815# MR 50.2 BPM AP3840# AR 47.3 BPM
ISIP 2800# FG .83 NPI 1200#

07/27/06

PROG: BRK PERF @ 3805 INJ RT 50 BPM INJ PSI 4075# ISIP 1700# FG .68 FRAC W/
77670# 30/50 SAND + 2028 BBL OF SLICKWATER MP 4573# MR 51 BPM AP 3847# AR
48.7 BPM ISIP 2800# FG .84 NPI 1200# (NOTE USED 2000 BBL RECLAIMED FRAC
WATER ON STAGE #7, FROM FLOWBACK TANK ON NBU 1022-16G.)

STAGE #8 RIH SET 8K CBP @ 6684' PERF @ 6590'-98' 3 SPF 6648'-54' 3 SPF BRK PERF @
2908# INJ RT 51 BPM INJ PSI 4630# ISIP 1600# FG .68 FRAC W/ 41750# 30/50 SAND + 1188
BBL OF SLICKWATER MP 5539# MR 51.2 BPM AP 4323# AR 47.9 BPM ISIP 2650# FG .84
NPI 1050#

STAGE #9 RIH SET 8K CBP @6407' PERF @ 6122'-28'3 SPF 6369'-77' 3 SPF BRK PERF @
2742# INJ RT 50.9 BPM INJ PSI 3400# ISIP 1550# FG .69 FRAC W/ 32510# 30/50 SAND +
628 BBL OF SLICKWATER MP 3934# MR 52 BPM AP 3455# AR 48 BPM ISIP 2650# FG .86
NPI 1100# RIH SET 8K CBP @6022' POOH RIG DOWN SCHLUMBERGER - CUTTERS RIH
W/ BIT POBS 2,3/8 TBG TAGG CBP RIG UP DRILG EQUIP DRILL OUT CBP @ 6022' 1000#
KICK RIH TAG @ 6377' 30' SAND ON PLUG DRILL OUT SAND & CBP @ 6407' 800# KICK

07/28/06

07/28/06 PROG: RIH TAG @ 6654' 30' SAND ON PLUG DRILL OUT SAND & CBP @ 6684'
300# KICK RIH TAG @ 6980' 30 SAND ON CBP DRILL OUT SAND & CBP @ 7000' 400#
KICK RIH TAG @ 7193' 30' SAND ON PLUG DRILL OUT SAND & CBP @ 7223' 400# KICK
RIH TAG @ 7374' 30 ' SAND ON CBP DRILL OUT SAND & PLUG @ 7404' 200# KICK RIH
TAG @ 7670' 30' SAND ON CBP DRILL OUT SAND & CBP @ 7702' 100# KICK RIH TAG @

7865' 30' SAND ON CBP DRILL OUT SAND & CBP @ 7895' 500# KICK RIH TAG @ 8055'
30' SAND ON PLUG DRILL OUT SAND & CBP @ 8085' 200# KICK RIH C/O TO PB @ 8500'
POOH LAY DOWN 30 JTS 2,3/8 LAND ON WELLHEAD W/ 235 JTS 2,3/8 J-55 TBG NIPPLE
DOWN BOP NIPPLE UP TREE PUMP OFF BIT RIG DOWN TRUN WELL TO

07/29/2006 PROG: WELL ON FLOWBACK, FLOWBACK REPORT: CP: 1000#, TP: 875 #,
20/64 CHK, 24 BWPH, 18 HRS, SD: TRACE, TTL BBLs FLWD: 598 BBLs, TODAY'S LTR:
11000 BBLs, LOAD REC TODAY: 598 BBLs, REMAINING LTR: 10402 BBLs, TOTAL
LOAD REC TO DATE: 598 BBLs.

07/30/2006 PROG: WELL ON FLOWBACK, FLOWBACK REPORT: CP: 1275#, TP: 1125 #,
20/64 CHK, 10 BWPH, 24 HRS, SD: TRACE, TTL BBLs FLWD: 270 BBLs, TODAY'S LTR:
9898 BBLs, LOAD REC TODAY: 270 BBLs, REMAINING LTR: 9628 BBLs, TOTAL LOAD
REC TO DATE: 1372 BBLs.

07/31/06 PROG: WELL ON FLOWBACK, FLOWBACK REPORT: CP: 1975#, TP: 1250 #, 20/64 CHK,
20 BWPH, 24 HRS, SD: CLEAN, TTL BBLs FLWD: 480 BBLs, TODAY'S LTR: 9628 BBLs,
LOAD REC TODAY: 480 BBLs, REMAINING LTR: 9148 BBLs, TOTAL LOAD REC TO
DATE: 1852 BBLs.

08/01/06 PROG: WELL ON FLOWBACK, FLOWBACK REPORT: CP: 2400#, TP: 1400 #, 20/64 CHK,
12 BWPH, 24 HRS, SD: CLEAN, TTL BBLs FLWD: 387 BBLs, TODAY'S LTR: 9148 BBLs,
LOAD REC TODAY: 387 BBLs, REMAINING LTR: 8761 BBLs, TOTAL LOAD REC TO
DATE: 2239 BBLs.

WELL WENT ON SALES: 07/31/2006, 11:30 A.M. 450 MCF, 20/64 CHK, SICP: 1175 #. FTP:
1400 #, 20 BWPH.

08/02/06 **ON SALES**
07/31/06: 295 MCF, 0 BC, 480 BW, TP: 251#, CP: 0#, 20/64 CHK, 24 HRS, LP: 244#.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

AMENDED REPORT FORM 8
(highlight changes)

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5. LEASE DESIGNATION AND SERIAL NUMBER:
ML-47060

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT or CA AGREEMENT NAME

8. WELL NAME and NUMBER:
STATE 1021-36P

9. API NUMBER:
4304736420

10. FIELD AND POOL, OR WILDCAT
NATURAL BUTTES

11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:
SESE 36 10S 21E

12. COUNTY
UINTAH

13. STATE
UTAH

14. DATE SPUNDED: **5/5/2006**

15. DATE T.D. REACHED: **7/9/2006**

16. DATE COMPLETED: **7/31/2006**

ABANDONED READY TO PRODUCE

17. ELEVATIONS (DF, RKB, RT, GL):
5458'GL

18. TOTAL DEPTH: MD **8,552**

TVD

19. PLUG BACK T.D.: MD **8,509**

TVD

20. IF MULTIPLE COMPLETIONS, HOW MANY? *

21. DEPTH BRIDGE MD

PLUG SET: TVD

22. TYPE ELECTRIC AND OTHER MECHANICAL LOGS RUN (Submit copy of each)
CBL-CCL-GR

23.

WAS WELL CORED? NO YES (Submit analysis)

WAS DST RUN? NO YES (Submit report)

DIRECTIONAL SURVEY? NO YES (Submit copy)

24. CASING AND LINER RECORD (Report all strings set in well)

HOLE SIZE	SIZE/GRADE	WEIGHT (#/ft.)	TOP (MD)	BOTTOM (MD)	STAGE CEMENTER DEPTH	CEMENT TYPE & NO. OF SACKS	SLURRY VOLUME (BBL)	CEMENT TOP **	AMOUNT PULLED
20"	14" STL	36.7#		40		28			
12 1/4"	9 5/8 H-40	32.3#		1,860		575			
7 7/8"	4 1/2 I-80	11.6#		8,552		2120			

25. TUBING RECORD

SIZE	DEPTH SET (MD)	PACKER SET (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
2 3/8"	7,436							

26. PRODUCING INTERVALS

FORMATION NAME	TOP (MD)	BOTTOM (MD)	TOP (TVD)	BOTTOM (TVD)	INTERVAL (Top/Bot - MD)	SIZE	NO. HOLES	PERFORATION STATUS	
(A) WASATCH	6,122	6,590			6,122 6,590	0.35	77	Open <input checked="" type="checkbox"/>	Squeezed <input type="checkbox"/>
(B) MESAVERDE	6,825	8,254			6,825 8,254	0.35	295	Open <input checked="" type="checkbox"/>	Squeezed <input type="checkbox"/>
(C)								Open <input type="checkbox"/>	Squeezed <input type="checkbox"/>
(D)								Open <input type="checkbox"/>	Squeezed <input type="checkbox"/>

27. PERFORATION RECORD

28. ACID, FRACTURE, TREATMENT, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL	AMOUNT AND TYPE OF MATERIAL
6122'-6590'	PMP 1816 BBLS SLICK H2O & 74,260# 30/50 SD
6825'-8254'	PMP 10,114 BBLS SLICK H2O & 367,378# 30/50 SD

RECEIVED

AUG 31 2006

DIV. OF OIL, GAS & MINING

29. ENCLOSED ATTACHMENTS:

ELECTRICAL/MECHANICAL LOGS

SUNDRY NOTICE FOR PLUGGING AND CEMENT VERIFICATION

GEOLOGIC REPORT

CORE ANALYSIS

DST REPORT

OTHER: _____

DIRECTIONAL SURVEY

30. WELL STATUS:
PROD

31. INITIAL PRODUCTION

INTERVAL A (As shown in item #26)

DATE FIRST PRODUCED: 7/31/2006		TEST DATE: 8/2/2006		HOURS TESTED: 24		TEST PRODUCTION RATES: →		OIL - BBL: 0	GAS - MCF: 1,305	WATER - BBL: 600	PROD. METHOD: FLOWING
CHOKE SIZE: 22/64	TBG. PRESS. 859	CSG. PRESS. 1,640	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL - BBL: 0	GAS - MCF: 1,305	WATER - BBL: 600	INTERVAL STATUS: PROD	

INTERVAL B (As shown in item #26)

DATE FIRST PRODUCED: 7/31/2006		TEST DATE: 8/2/2006		HOURS TESTED: 24		TEST PRODUCTION RATES: →		OIL - BBL: 0	GAS - MCF: 1,305	WATER - BBL: 600	PROD. METHOD: FLOWING
CHOKE SIZE: 22/64	TBG. PRESS. 859	CSG. PRESS. 1,640	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL - BBL: 0	GAS - MCF: 1,305	WATER - BBL: 600	INTERVAL STATUS: PROD	

INTERVAL C (As shown in item #26)

DATE FIRST PRODUCED:		TEST DATE:		HOURS TESTED:		TEST PRODUCTION RATES: →		OIL - BBL:	GAS - MCF:	WATER - BBL:	PROD. METHOD:
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL - BBL:	GAS - MCF:	WATER - BBL:	INTERVAL STATUS:	

INTERVAL D (As shown in item #26)

DATE FIRST PRODUCED:		TEST DATE:		HOURS TESTED:		TEST PRODUCTION RATES: →		OIL - BBL:	GAS - MCF:	WATER - BBL:	PROD. METHOD:
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL - BBL:	GAS - MCF:	WATER - BBL:	INTERVAL STATUS:	

32. DISPOSITION OF GAS (Sold, Used for Fuel, Vented, Etc.)

SOLD

33. SUMMARY OF POROUS ZONES (Include Aquifers):

Show all important zones of porosity and contents thereof. Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

Formation	Top (MD)	Bottom (MD)	Descriptions, Contents, etc.	Name	Top (Measured Depth)
WASATCH MESAVERDE	4,032 6,680	6,680			

35. ADDITIONAL REMARKS (Include plugging procedure)

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records.

NAME (PLEASE PRINT) SHEILA UPCHEGO TITLE REGULATORY ANALYST
 SIGNATURE  DATE 8/8/2006

This report must be submitted within 30 days of

- completing or plugging a new well
- drilling horizontal laterals from an existing well bore
- recompleting to a different producing formation
- reentering a previously plugged and abandoned well
- significantly deepening an existing well bore below the previous bottom-hole depth
- drilling hydrocarbon exploratory holes, such as core samples and stratigraphic tests

* ITEM 20: Show the number of completions if production is measured separately from two or more formations.

** ITEM 24: Cement Top - Show how reported top(s) of cement were determined (circulated (CIR), calculated (CAL), cement bond log (CBL), temperature survey (TS)).

Send to: Utah Division of Oil, Gas and Mining Phone: 801-538-5340
 1594 West North Temple, Suite 1210
 Box 145801 Fax: 801-359-3940
 Salt Lake City, Utah 84114-5801

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-47060
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME:
2. NAME OF OPERATOR: KERR MCGEE OIL & GAS ONSHORE LP		8. WELL NAME and NUMBER: STATE 1021-36P
3. ADDRESS OF OPERATOR: 1368 SOUTH 1200 EAST CITY VERNAL STATE UT ZIP 84078	PHONE NUMBER: (435) 781-7024	9. API NUMBER: 4304736420
4. LOCATION OF WELL FOOTAGES AT SURFACE: 547FSL, 742'FEL		10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 36 10S 21E		COUNTY: UINTAH
		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input checked="" type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
12/18/2006: PMP 6 BBLs KCL TO KILL 3 DRUMS OF 15% ACID & 6 BBL FLUSH DOWN TBG.

RECEIVED
DEC 26 2006
DIV. OF OIL, GAS & MINING

NAME (PLEASE PRINT) SHEILA UPCHEGO	TITLE SENIOR LAND ADMIN SPECIALIST
SIGNATURE	DATE 12/20/2006

(This space for State use only)

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-47060
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME:
2. NAME OF OPERATOR: KERR MCGEE OIL & GAS ONSHORE LP		8. WELL NAME and NUMBER: STATE 1021-36P
3. ADDRESS OF OPERATOR: 1368 SOUTH 1200 EAST CITY VERNAL STATE UT ZIP 84078	PHONE NUMBER: (435) 781-7024	9. API NUMBER: 4304736420
4. LOCATION OF WELL FOOTAGES AT SURFACE: 547FSL, 742'FEL		10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 36 10S 21E		COUNTY: UINTAH
		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>MAINTENANCE</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

12/27/06 MIRU
Days On WellWork: 1
Daily Detail : ROAD RIG (MILES#2) FROM PAD WELLS TO LOCATION. MIRU. SICP 1000#, FTP 200#. BLEED PRESS OFF IN 2 HRS. NDWH, NUBOP. PREP TO POOH IN AM.

12/28/06 C/O
Days On WellWork: 2
Daily Detail: 7 AM: HSM. POOH W/ TBG F/ 7434'. LD BHA. PU NEW 3 7/8" MILL, POBS & RIH. PU 33 JTS TBG OFF TRAILER. TAG PBTD @ 8360' (106' RATHOLE). XO. POOH. LD 33 JTS. LAND TBG @ 7431'. NDBOP, DROP BALL, NUWH. PUMP 40 BBLS. DID NOT SEE POBS GO. RU FLOWBACK LINES. SWI FOR PBU, SDFN.

12/29/06 BROACH TUBING
Days On WellWork: 3
Daily Detail : SITP 500#. RU SWAB EQUIP. RIH W/ FULL GAUGE BROACH. TAG SN. POOH. RD SWAB. RD & RACK OUT EQUIP. TURN TO PROD 1PM. FINAL REPORT.

NAME (PLEASE PRINT) <u>SHEILA UPCHEGO</u>	TITLE <u>SENIOR LAND ADMIN SPECIALIST</u>
SIGNATURE 	DATE <u>1/17/2007</u>

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: KERR MCGEE OIL & GAS ONSHORE LP Operator Account Number: N 2995
 Address: 1368 SOUTH 1200 EAST
city VERNAL
state UT zip 84078 Phone Number: (435) 781-7024

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
Various	NBU REVISION						UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
E	Various	2900	3/13/2012			2/1/2012	
Comments: MOVE THE ATTACHED WELLS INTO THE NATURAL BUTTES UNIT REVISION EFFECTIVE 02/01/2012. <i>72 wells</i> 5/31/2012							

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
Comments:							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
Comments:							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

SHEILA WOPSOCK

Name (Please Print)

Signature

REGULATORY ANALYST

Title

5/30/2012

Date

RECEIVED

MAY 31 2012

Div. of Oil, Gas & Mining

Entity Action Form Attachment for wells moved into the Natural Buttes Unit Effective 02/01/2012.

API	Well Name	QTR/QTR	Section	TWNSHP	RANGE	Producing Intervals
4304737079	FEDERAL 920-25I	NESE	15431	25 9S	20E	WASATCH/MESAVERDE
4304737080	FEDERAL 920-25H	SENE	15761	25 9S	20E	WASATCH/MESAVERDE
4304737081	FEDERAL 920-25A	NENE	15553	25 9S	20E	WASATCH/MESAVERDE from MURD
4304739098	STATE 1021-28M	SWSW	16499	28 10S	21E	WASATCH To WSMVD
4304737918	FEDERAL 1021-26L	NWSW	16390	26 10S	21E	MESAVERDE To WSMVD
4304737919	FEDERAL 1021-26N	SESW	16391	26 10S	21E	WASATCH/MESAVERDE
4304737916	FEDERAL 1021-25O	SWSE	16277	25 10S	21E	WASATCH/MESAVERDE
4304739112	STATE 1021-31M	SWSW	16454	31 10S	21E	WASATCH To WSMVD
4304739127	STATE 1021-32P	SESE	16471	32 10S	21E	WASATCH/MESAVERDE
4304739128	STATE 1021-32O	SWSE	17513	32 10S	21E	WASATCH/MESAVERDE
4304739131	STATE 1021-32L	NWSW	16902	32 10S	21E	WASATCH/MESAVERDE
4304739133	STATE 1021-32J	NWSE	17529	32 10S	21E	WASATCH/MESAVERDE
4304739134	STATE 1021-32I	NESE	16905	32 10S	21E	WSMVD
4304739135	STATE 1021-32H	SENE	17528	32 10S	21E	WASATCH/MESAVERDE
4304735714	FEDERAL 1022-29H	SENE	15147	29 10S	22E	WASATCH/MESAVERDE
4304735715	FEDERAL 1022-29F	SENW	15162	29 10S	22E	WASATCH/MESAVERDE
4304735716	FEDERAL 1022-29B	NWNE	11492	29 10S	22E	WASATCH/MESAVERDE
4304735737	FEDERAL 1022-29I	NESE	15001	29 10S	22E	WASATCH/MESAVERDE
4304735738	FEDERAL 1022-29D	NWNW	15016	29 10S	22E	MESAVERDE To WSMVD
4304734862	FEDERAL 31-10-22	SESE	13879	31 10S	22E	MESAVERDE To WSMVD
4304735173	FEDERAL 1022-31D	NWNW	14132	31 10S	22E	WASATCH/MESAVERDE
4304736492	FEDERAL 1022-31N	SESW	16255	31 10S	22E	WASATCH/MESAVERDE
4304736493	FEDERAL 1022-31I	NESE	15089	31 10S	22E	WASATCH/MESAVERDE
4304736494	FEDERAL 1022-31G	SWNE	15075	31 10S	22E	WASATCH/MESAVERDE
4304736495	FEDERAL 1022-31F	SENE	15230	31 10S	22E	WASATCH/MESAVERDE
4304736574	FEDERAL 1022-31C	NENW	15090	31 10S	22E	WASATCH/MESAVERDE
4304736575	FEDERAL 1022-31J	NWSE	15214	31 10S	22E	WASATCH/MESAVERDE
4304736576	FEDERAL 1022-31L	NWSW	16276	31 10S	22E	WASATCH/MESAVERDE
4304734317	STATE 1-32	NESW	13419	32 10S	22E	WASATCH/MESAVERDE
4304734831	STATE 2-32	SESW	13842	32 10S	22E	MESAVERDE To WSMVD
4304734832	STATE 3-32	NWSW	13844	32 10S	22E	WASATCH/MESAVERDE
4304735095	STATE 1022-32J	NWSE	114097	32 10S	22E	WSMVD
4304735096	STATE 1022-32A	NENE	13914	32 10S	22E	WASATCH/MESAVERDE
4304735186	STATE 1022-32P	SESE	14131	32 10S	22E	MESAVERDE To WSMVD
4304735315	STATE 1022-32O	SWSE	14114	32 10S	22E	WASATCH/MESAVERDE
4304735647	STATE 1022-32H	SENE	14348	32 10S	22E	MESAVERDE To WSMVD
4304736413	STATE 1021-36O	SWSE	15619	36 10S	21E	WASATCH/MESAVERDE
*4304738157	WELL BELONGS TO QEP ENERGY CORP "GH 8-20-8-21" PERMIT NOT APPROVED					
4304734839	FEDERAL 1022-15F	SENW	14618	15 10S	22E	WASATCH/MESAVERDE
4304736414	STATE 1021-36J	NWSE	15651	36 10S	21E	WASATCH/MESAVERDE
4304738152	STATE 1021-36L	NWSW	16012	36 10S	21E	WASATCH/MESAVERDE
4304735440	FEDERAL 1022-15J	NWSE	14617	15 10S	22E	WASATCH/MESAVERDE
4304736415	STATE 1021-36I	NESE	15684	36 10S	21E	WASATCH/MESAVERDE
4304738845	STATE 1021-36D	NWNW	16455	36 10S	21E	WASATCH/MESAVERDE

4304750096	FEDERAL 1022-27H	SENE	17626	27 10S	22E	WASATCH/MESAVERDE	
4304736416	STATE 1021-36H	SENE	15335	36 10S	21E	WASATCH/MESAVERDE	
4304738846	STATE 1021-36E	SWNW	16523	36 10S	21E	WASATCH/MESAVERDE	
4304735676	FEDERAL 1022-28L	NWSW	15110	28 10S	22E	WASATCH/MESAVERDE	
4304736417	STATE 1021-36G	SWNE	15297	36 10S	21E	WASATCH/MESAVERDE	
4304738847	STATE 1021-36F	SENE	16394	36 10S	21E	WASATCH/MESAVERDE	
4304735713	FEDERAL 1022-28N	SESW	15145	28 10S	22E	WASATCH/MESAVERDE	
4304736418	STATE 1021-36B	NWNE	14953	36 10S	21E	WASATCH/MESAVERDE	
4304738848	STATE 1021-36N	SESW	16359	36 10S	21E	WASATCH/MESAVERDE	
4304735735	FEDERAL 1022-28O	SWSE	15285	28 10S	22E	WASATCH/MESAVERDE	from MURD
4304736419	STATE 1021-36A	NENE	15035	36 10S	21E	WASATCH/MESAVERDE	
4304738849	STATE 1021-36K	NESW	16084	36 10S	21E	WASATCH/MESAVERDE	
4304735736	FEDERAL 1022-28M	SWSW	15286	28 10S	22E	WASATCH/MESAVERDE	
4304736420	STATE 1021-36P	SESE	15372	36 10S	21E	WASATCH/MESAVERDE	
4304738850	STATE 1021-36C	NENW	16396	36 10S	21E	WASATCH/MESAVERDE	
4304734861	FEDERAL 29-10-22	SESE	14006	29 10S	22E	MESAVERDE	TO WSMVD
4304735577	FEDERAL 1022-33O	SWSE	15080	33 10S	22E	WASATCH/MESAVERDE	
4304735739	FEDERAL 1022-33E	SWNW	15193	33 10S	22E	WASATCH/MESAVERDE	
4304735740	FEDERAL 1022-33M	SWSW	15373	33 10S	22E	WASATCH/MESAVERDE	
4304735741	FEDERAL 1022-33L	NWSW	15511	33 10S	22E	WASATCH/MESAVERDE	
4304735742	FEDERAL 1022-33G	SWNE	15404	33 10S	22E	WASATCH/MESAVERDE	from MURD
4304735743	FEDERAL 1022-33C	NENW	15405	33 10S	22E	WASATCH/MESAVERDE	
4304735744	FEDERAL 1022-33A	NENE	15539	33 10S	22E	WASATCH/MESAVERDE	
4304737105	FEDERAL 1022-33D	NWNW	16502	33 10S	22E	WASATCH/MESAVERDE	
4304737106	FEDERAL 1022-33F	SENE	16560	33 10S	22E	WASATCH/MESAVERDE	from WSTC
4304737107	FEDERAL 1022-33K	NESW	16124	33 10S	22E	WASATCH/MESAVERDE	
4304737109	FEDERAL 1022-33N	SESW	16126	33 10S	22E	WASATCH/MESAVERDE	
4304737110	FEDERAL 1022-33B	NWNE	16561	33 10S	22E	WASATCH/MESAVERDE	
4304735810	STATE 1021-36E	SWNW	14295	36 10S	21E	WASATCH/MESAVERDE	