

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

001 APPLICATION FOR PERMIT TO DRILL OR REENTER



1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU-0143551
b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator WESTPORT OIL & GAS COMPANY L.P.		7. If Unit or CA Agreement, Name and No.
3A. Address 1368 SOUTH 1200 EAST VERNAL, UT 84078		8. Lease Name and Well No. FEDERAL 1022-31G
3b. Phone No. (include area code) (435)-781-7024		9. API Well No. 43-047-36494
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SWNE 1908'FNL & 2019'FEL 629986X 39.907309		10. Field and Pool, or Exploratory NATURAL BUTTES
At proposed prod. Zone 4418366Y -109.479323		11. Sec., T., R., M., or Blk, and Survey or Area SECTION 31-T10S-R22E
14. Distance in miles and direction from nearest town or post office* 32.3 MILES SOUTHEAST OF OURAY, UTAH		12. County or Parish UINTAH
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1908'		13. State UTAH
16. No. of Acres in lease 577.36		17. Spacing Unit dedicated to this well 40.00
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. REFER TO TOPO C 8500'		20. BLM/BIA Bond No. on file CO-1203
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5455'GL		22. Approximate date work will start*
		23. Estimated duration

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized office. |

RECEIVED
APR 04 2005
DIV. OF OIL, GAS & MINING

25. Signature 	Name (Printed/Typed) SHEILA UPCHEGO	Date 3/29/2005
Title REGULATORY ANALYST		
Approved by (Signature) 	Name (Printed/Typed) BRADLEY G. HILL	Date 04-06-05
Title ENVIRONMENTAL SCIENTIST III		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

Federal Approval of this Action is Necessary

25

R
21
E
R
22
E

T10S, R22E, S.L.B.&M.

30

N00°08'46"W
456.46' (Meas.)

1977 Brass Cap
0.9' High, Pile
of Stones

N89°51'00"W - 2141.01' (Meas.)

S89°58'34"W - 2642.33' (Meas.)

1991 Alum. Cap.
Pile of Stones

1991 Brass Cap,
0.3' High, Mound
of Stones

NE Cor. Section
36, T10S, R21E,
S.L.B.&M.

LOT 1

1908'

N00°00'25"W - 2646.47' (Meas.)

BASIS OF ELEVATION
TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE, QUADRANGLE, UTAH, UTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

BASIS OF ELEVATION

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

LOT 2

FEDERAL #1022-31G
Elev. Ungraded Ground = 5455'

2019'

N00°08'33"W - 2657.75' (Meas.)

S00°27'42"E - 2620.82' (Meas.)

1977 Brass Cap
0.6' High, Pile
of Stones

31

1991 Brass Cap,
0.6' High, Mound
of Stones

36

LOT 3

N00°00'38"W - 2641.38' (Meas.)

LOT 4

1977 Brass Cap
Flush with Pile
of Stones

1991 Alum. Cap,
0.2' High, Pile
of Stones

T10S

N89°46'37"W - 2105.36' (Meas.) T11S S89°52'38"E - 2651.07' (Meas.)

1991 Alum. Cap,
1.3' High, Pile
of Stones

T10S

T11S

LEGEND:

└─┘ = 90° SYMBOL

● = PROPOSED WELL HEAD.

▲ = SECTION CORNERS LOCATED.

(NAD 83)
LATITUDE = 39°54'26.74" (39.907428)
LONGITUDE = 109°28'48.47" (109.480131)
(NAD 27)
LATITUDE = 39°54'26.86" (39.907461)
LONGITUDE = 109°28'46.01" (109.479447)

WESTPORT OIL AND GAS COMPANY, L.P.


Well location, FEDERAL #1022-31G, located as shown in the SW 1/4 NE 1/4 of Section 31, T10S, R22E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE, QUADRANGLE, UTAH, UTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

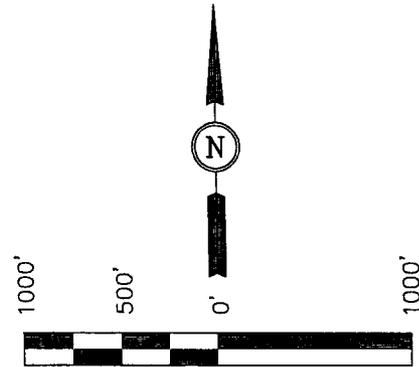

SCALE

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Robert J. Gray
REGISTERED LAND SURVEYOR
REGISTRATION NO. 16379
STATE OF UTAH

UINTAH ENGINEERING & LAND SURVEYING

85 SOUTH 200 EAST - VERNAL, UTAH 84078

(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 1-4-05	DATE DRAWN: 1-14-05
PARTY M.A. C.R. E.C.O.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE	WESTPORT OIL AND GAS COMPANY, L.P.

6

**FEDERAL 1022-31G
SW/NE SEC. 31, T10S, R22E
UINTAH COUNTY, UTAH
UTU-0143551**

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. Geologic Surface Formation:

Uinta – at Surface

2. Estimated Tops/Depths of Important Geologic Markers/Anticipated Gas:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
	KB	Uinta
	Green River	1090'
Gas	Wasatch	4100'
Gas	Mesaverde	6525'
	TD	8500'

3. Pressure Control Equipment (Schematic Attached)

The BOP stack will consist of one 11" 3,000 psi annular BOP, one 11" 3,000 psi double ram, and one 11' drilling spool. The lower ram will contain pipe rams, and the upper ram will contain blind rams.

The choke and kill lines and the choke manifold will have a 3,000 psi minimum pressure rating.

The hydrill will be tested to 1,500 psi. The rams, choke manifold, kelly safety valves, drill string safety valves, and inside BOP will be tested to 3,000 psi.

4. Proposed Casing & Cementing Program:

The Surface casing and the Production casing will be new.

Please refer to the attached Casing & Cementing Program.

5. Drilling Fluids Program:

Please refer to the attached Drilling Fluids Program

6. **Evaluation Program:** (Logging)

Please refer to the attached Drilling Program.

7. **Abnormal Conditions:**

Maximum anticipated bottomhole pressure calculated @8,500' TD approximately equals 3,400 psi (calculated at 0.4 psi/foot). Maximum anticipated surface pressure equals approximately 1,530 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. **Anticipated Starting Dates:**

Drilling is planned to commence immediately upon approval of this application.

9. **Variations:**

None anticipated.

10. **Other:**

A Class III Archaeological Study Report, will be submitted when report becomes available.



Westport Oil and Gas Company, L.P.
DRILLING PROGRAM

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'				2270	1370	254000
SURFACE	9-5/8"	0 to 1800	32.30	H-40	STC	0.89*****	1.63	4.99
						7780	6350	201000
PRODUCTION	4-1/2"	0 to 8500	11.60	I-80	LTC	3.05	1.44	2.34

- 1) Max Anticipated Surf. Press. (MASP) (Surface Casing) = (Pore Pressure at next csg point - (0.22 psi/ft-partial evac gradient x TVD of next csg point))
 2) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft-partial evac gradient x TVD)
 (Burst Assumptions: TD = 10.0 ppg) .22 psi/ft = gradient for partially evac wellbore
 (Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing * Buoy. Fact. of water)
 MASP 2550 psi

***** Burst SF is low but csg is much stronger than formation at 2000'. EMW @ 2000' for 2270# is 21.8 ppg or 1.13 psi/ft

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE Option 1	LEAD	500	Premium cmt + 2% CaCl + .25 pps flocele	215	60%	15.60	1.18
	TOP OUT CMT (1)	200	20 gals sodium silicate + Premium cmt + 2% CaCl + .25 pps flocele	50		15.60	1.18
	TOP OUT CMT (2)	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
NOTE: If well will circulate water to surface, option 2 will be utilized							
SURFACE Option 2	LEAD	1500	Prem cmt + 16% Gel + 10 pps gilsonite + .25 pps flocele + 3% salt BWOC	170	35%	11.00	3.82
	TAIL	500	Premium cmt + 2% CaCl + .25 pps flocele	180	35%	15.60	1.18
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
PRODUCTION	LEAD	3,600'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	390	60%	11.00	3.38
	TAIL	4,900'	50/50 Poz/G + 10% salt + 2% gel + .1% R-3	1370	60%	14.30	1.31

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained
 *Substitute caliper hole volume plus 15% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.
 BOPE: 11" 3M with one annular and 2 rams. Test to 3,000 psi (annular to 1,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.
 Drop Tolco surveys every 2000'. Maximum allowable hole angle is 5 degrees.

DRILLING ENGINEER: _____
 Brad Laney
 DRILLING SUPERINTENDENT: _____
 Randy Bayne

DATE: _____
 DATE: _____

FEDERAL 1022-31G
SW/NE SEC. 31, T10S, R22E
UINTAH COUNTY, UTAH
UTU-0143551

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. **Existing Roads:**

Directions to the proposed location are attached.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

2. **Planned Access Roads:**

The access road will be crowned (2 to 3%), ditched and constructed with a running surface of 18 feet and a maximum disturbed width of 30 feet. Graveling or capping the roadbed will be performed as necessary to provide a well constructed, safe road. Prior to construction or upgrading, the proposed road shall be cleared of any snow and allowed to dry completely.

Surface disturbance and vehicular traffic will be limited to the proposed location and proposed access route. Any additional area needed will be approved in advance. All construction shall be in conformance with the standards outlined in the BLM and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development. 1989.

The road surface and shoulders will be kept in a safe and usable condition and will be maintained in accordance with the original construction standards. All drainage ditches will be kept clear and free-flowing and will be maintained according to original construction standards. The access road surface will be kept free of trash during operations. All traffic will be confined to the approved disturbed surface. Road drainage crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing or shall the drainages be blocked by the road bed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Should mud holes develop, they shall be filled in and detours around them avoided. When snow is removed from the road during the winter months, the snow shall be pushed outside of the borrow ditches, and the turnouts kept clear so that snowmelt will be channeled away from the road.

Approximately 0.2 Miles +/- of access road is proposed. Please refer to Topo Map B.

3. **Location of Existing Wells Within a 1-Mile Radius:**

Please refer to Topo Map C.

4. **Location of Existing & Proposed Facilities:**

The following guidelines will apply if the well is productive.

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The requested color is Carlsbad Canyon (2.5 Y 6/2) as determined during the on-site inspection.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

A approximately 1190' with 4" steel pipeline with a width of 30' of pipeline is proposed. The pipeline will follow the access road. The 4" pipeline shall be butt-welded. Please refer to the attached Topo Map D.

5. **Location and Type of Water Supply:**

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec.32, T4S,R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

6. **Source of Construction Materials:**

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

7. **Methods of Handling Waste Materials:**

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit

walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge of liquids.

A plastic reinforced liner is to be used as discussed during on-site inspection. It will be a minimum of 16 mil thick and felt, with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec.35, T9S, R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E. (Request is in lieu of filing Form 3160-5, after initial production).

8. Ancillary Facilities:

None are anticipated.

9. Well Site Layout: (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

Location size may change prior to drilling of the well due to the current rig availability. If the proposed location is not large enough to accommodate the drilling rig. The location will be re-surveyed and a form 3160-5 will be submitted.

The net wire shall be no more than two inches above the ground. The barbed wire shall be three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

10. Plans for Reclamation of the Surface:

Producing Location:

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water (s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling, and recontouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

Dry Hole/Abandoned Location:

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation

of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations.

11. Surface Ownership:

Bureau of Land Management
 170 South 500 East
 Vernal, UT 84078
 (435) 781-4400

12. Other Information:

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance. The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

Seed Mixture:

Wyoming Big Sagebrush	1 lb/acre
Scarlet Globe Mallow	4 lb/acre
Galletta Grass	3 lb/acre
Shade Scale	4 lb/acre

WILDLIFE STIPULATIONS:

ANTELOPE: NO CONSTRUCTION OR DRILLING MAY 15TH THROUGH JUNE 20TH.

13. Lessee's or Operators's Representative & Certification:

Sheila Upchego
 Regulatory Analyst
 Westport O&G Co. L.P.
 P.O. Box 1148
 Vernal, UT 84078
 (435) 781-7024

Randy Bayne
 Drilling Manager
 Westport O&G Co. L.P.
 P.O. Box 1148
 Vernal, UT 84078
 (435) 781-7018

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Westport Oil & Gas Company L.P., is considered to be the operator of the subject well. Westport Oil & Gas Company L.P., agrees to be responsible under the terms and the conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for the lease activities is being provided by BLM Nationwide Bond #CO-1203.

I hereby certify that the proposed drill site and access route has been inspected and that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

/s/ Sheila Upchego 
Sheila Upchego

3/29/05
Date

WESTPORT OIL AND GAS COMPANY, L.P.
FEDERAL #1022-31G
SECTION 31, T10S, R22E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 11.2 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 9.6 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 0.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN RIGHT AND PROCEED IN A SOUTHWESTERLY, THEN WESTERLY DIRECTION APPROXIMATELY 0.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 0.1 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE SOUTHWEST; FOLLOW ROAD FLAGS IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 53.7 MILES.

WESTPORT OIL AND GAS COMPANY, L.P.

FEDERAL #1022-31G
LOCATED IN UTAH COUNTY, UTAH
SECTION 31, T10S, R22E, S.L.B.&M.

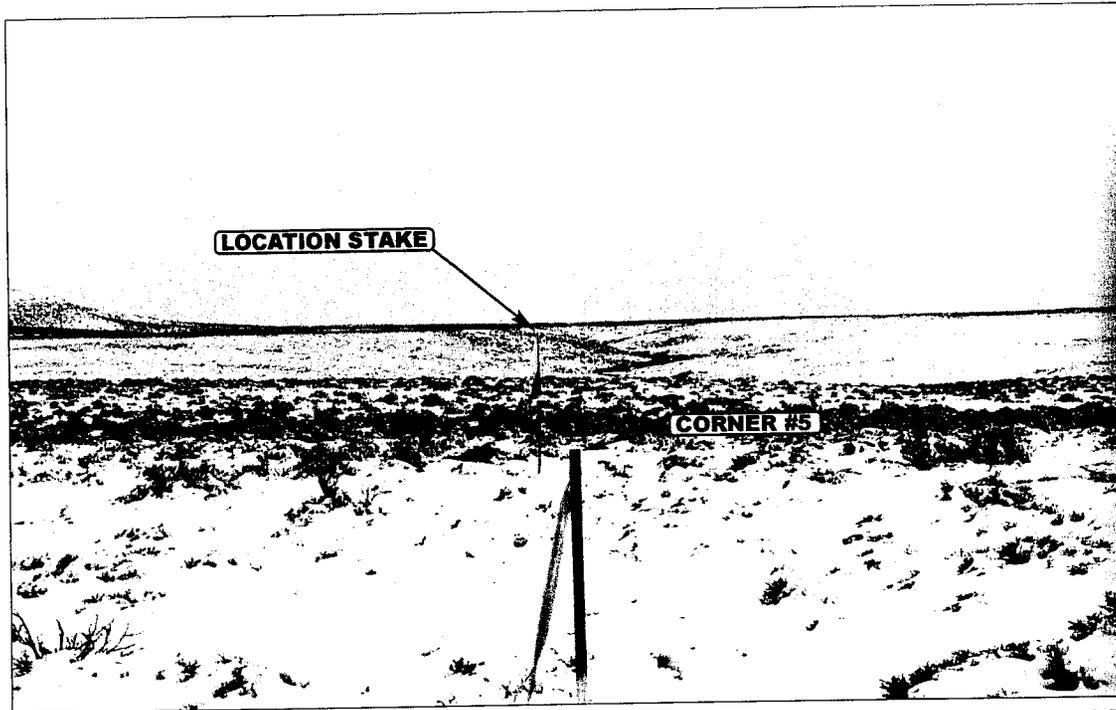


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: SOUTHERLY

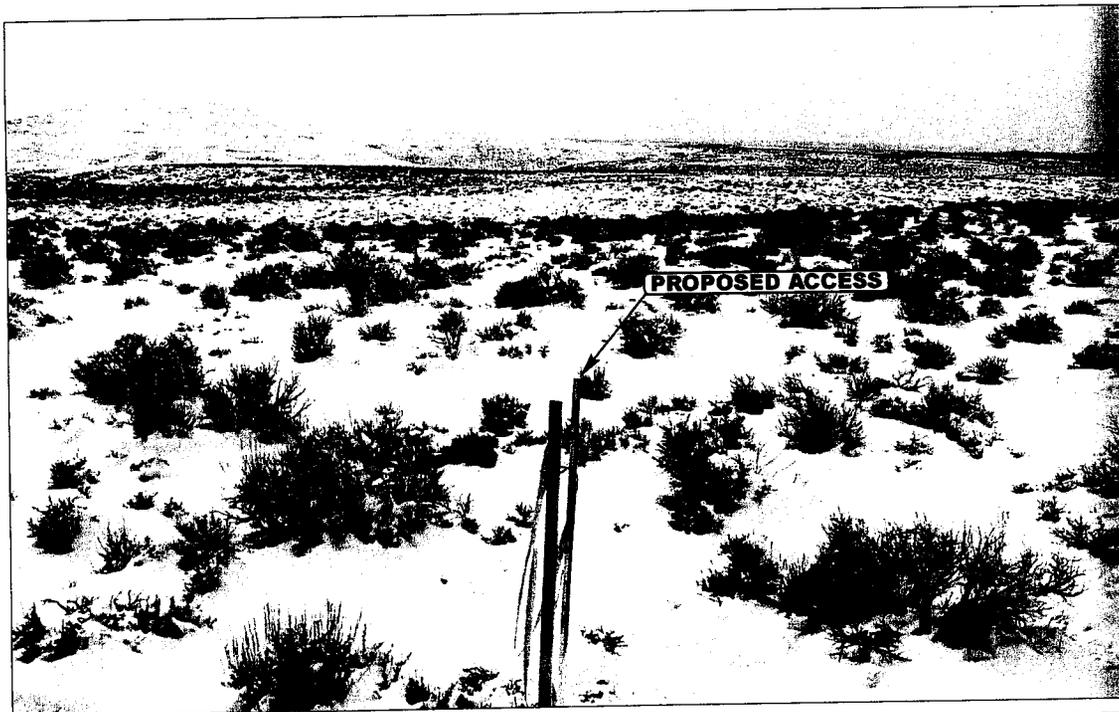


PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: WESTERLY



- Since 1964 -

UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS


01 **07** **05**
MONTH DAY YEAR

PHOTO

TAKEN BY: M.A.

DRAWN BY: L.K.

REVISED: 00-00-00

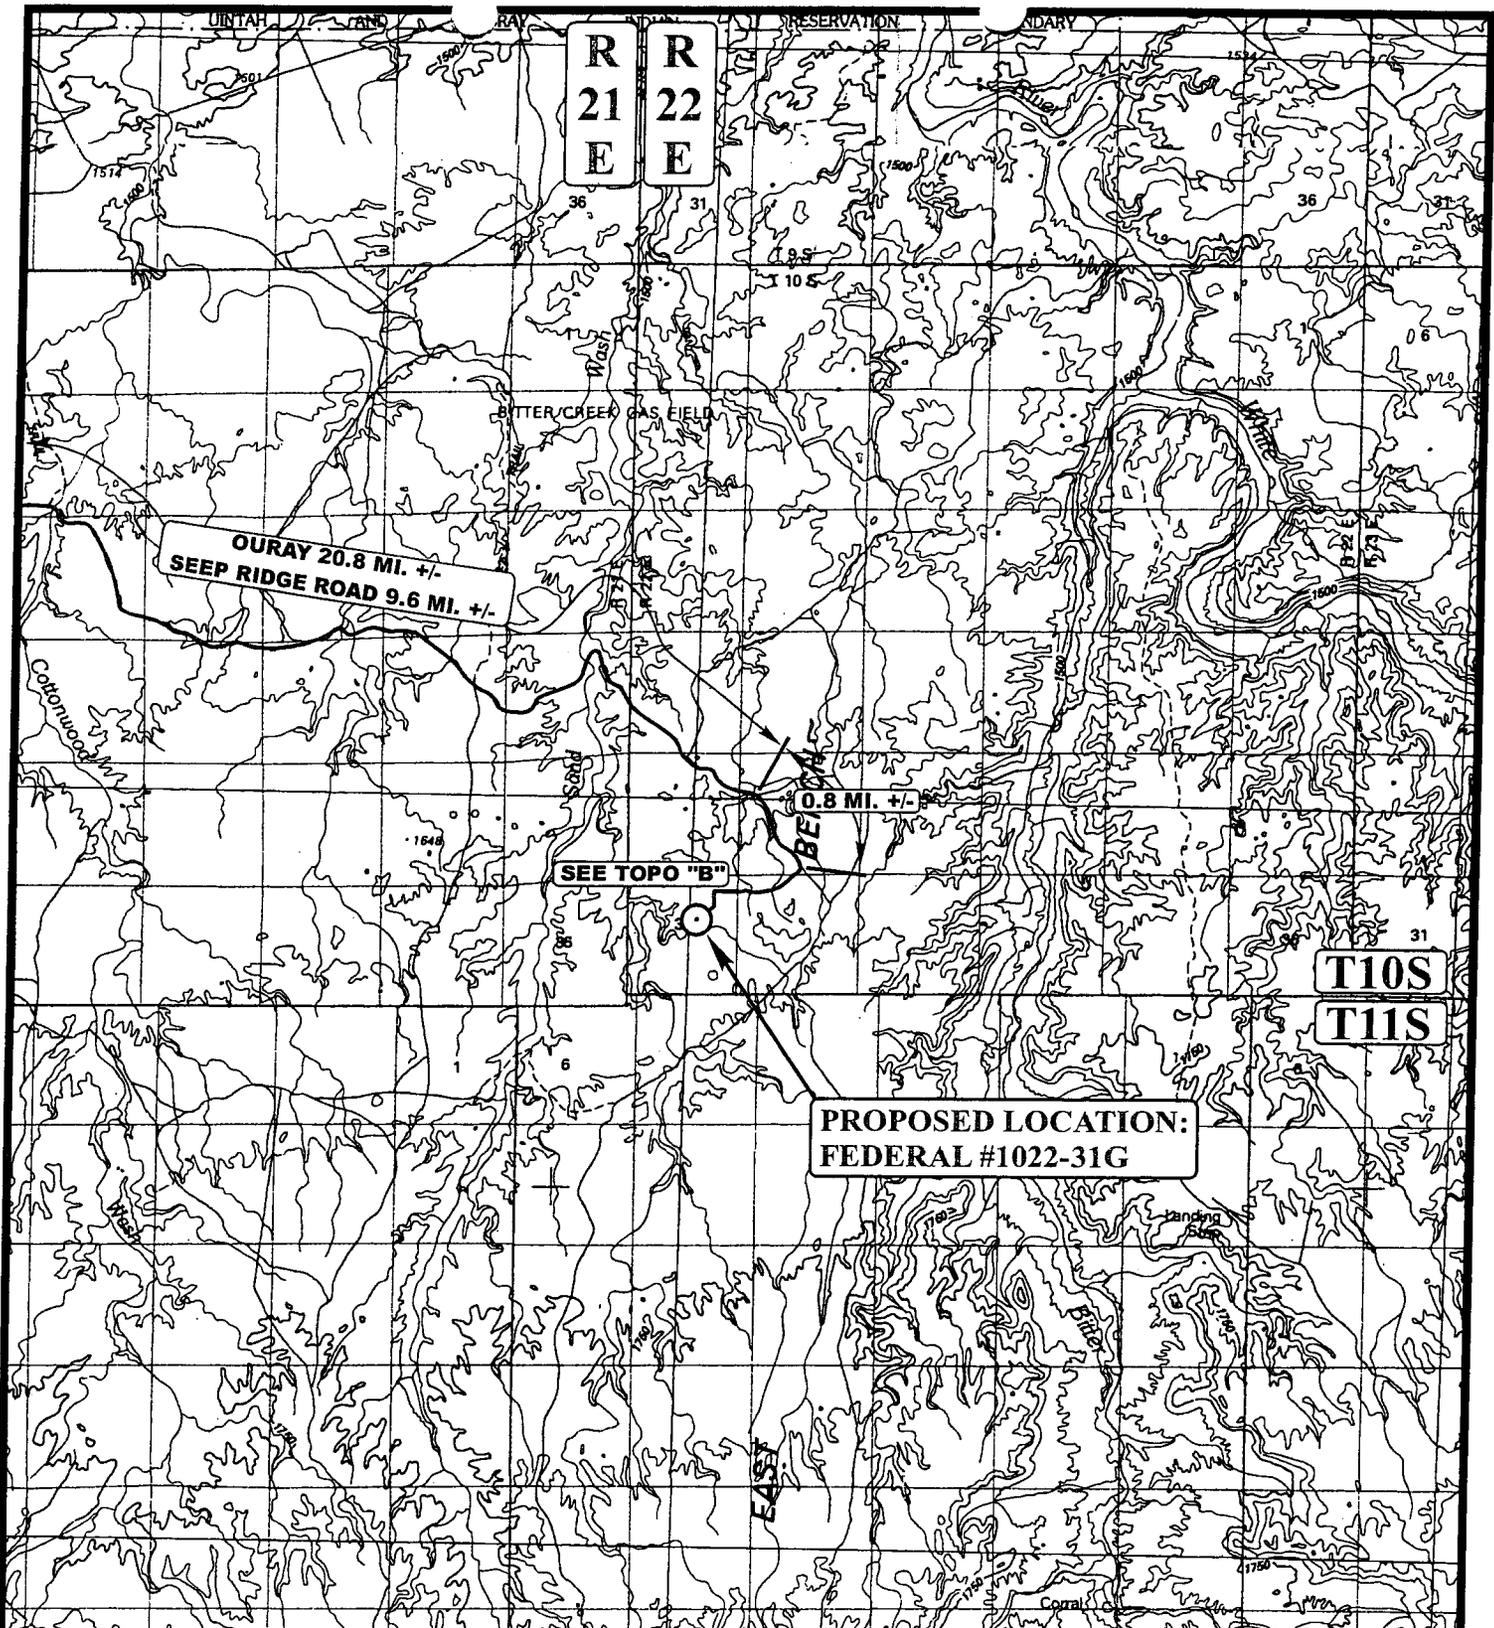

LEGEND:

○ PROPOSED LOCATION

WESTPORT OIL AND GAS COMPANY, L.P.

FEDERAL #1022-31G
SECTION 31, T10S, R22E, S.L.B.&M.
1908' FNL 2019' FEL



Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813




TOPOGRAPHIC
MAP

01 07 05
MONTH DAY YEAR

SCALE: 1:100,000 | DRAWN BY: L.K. | REVISED: 00-00-00



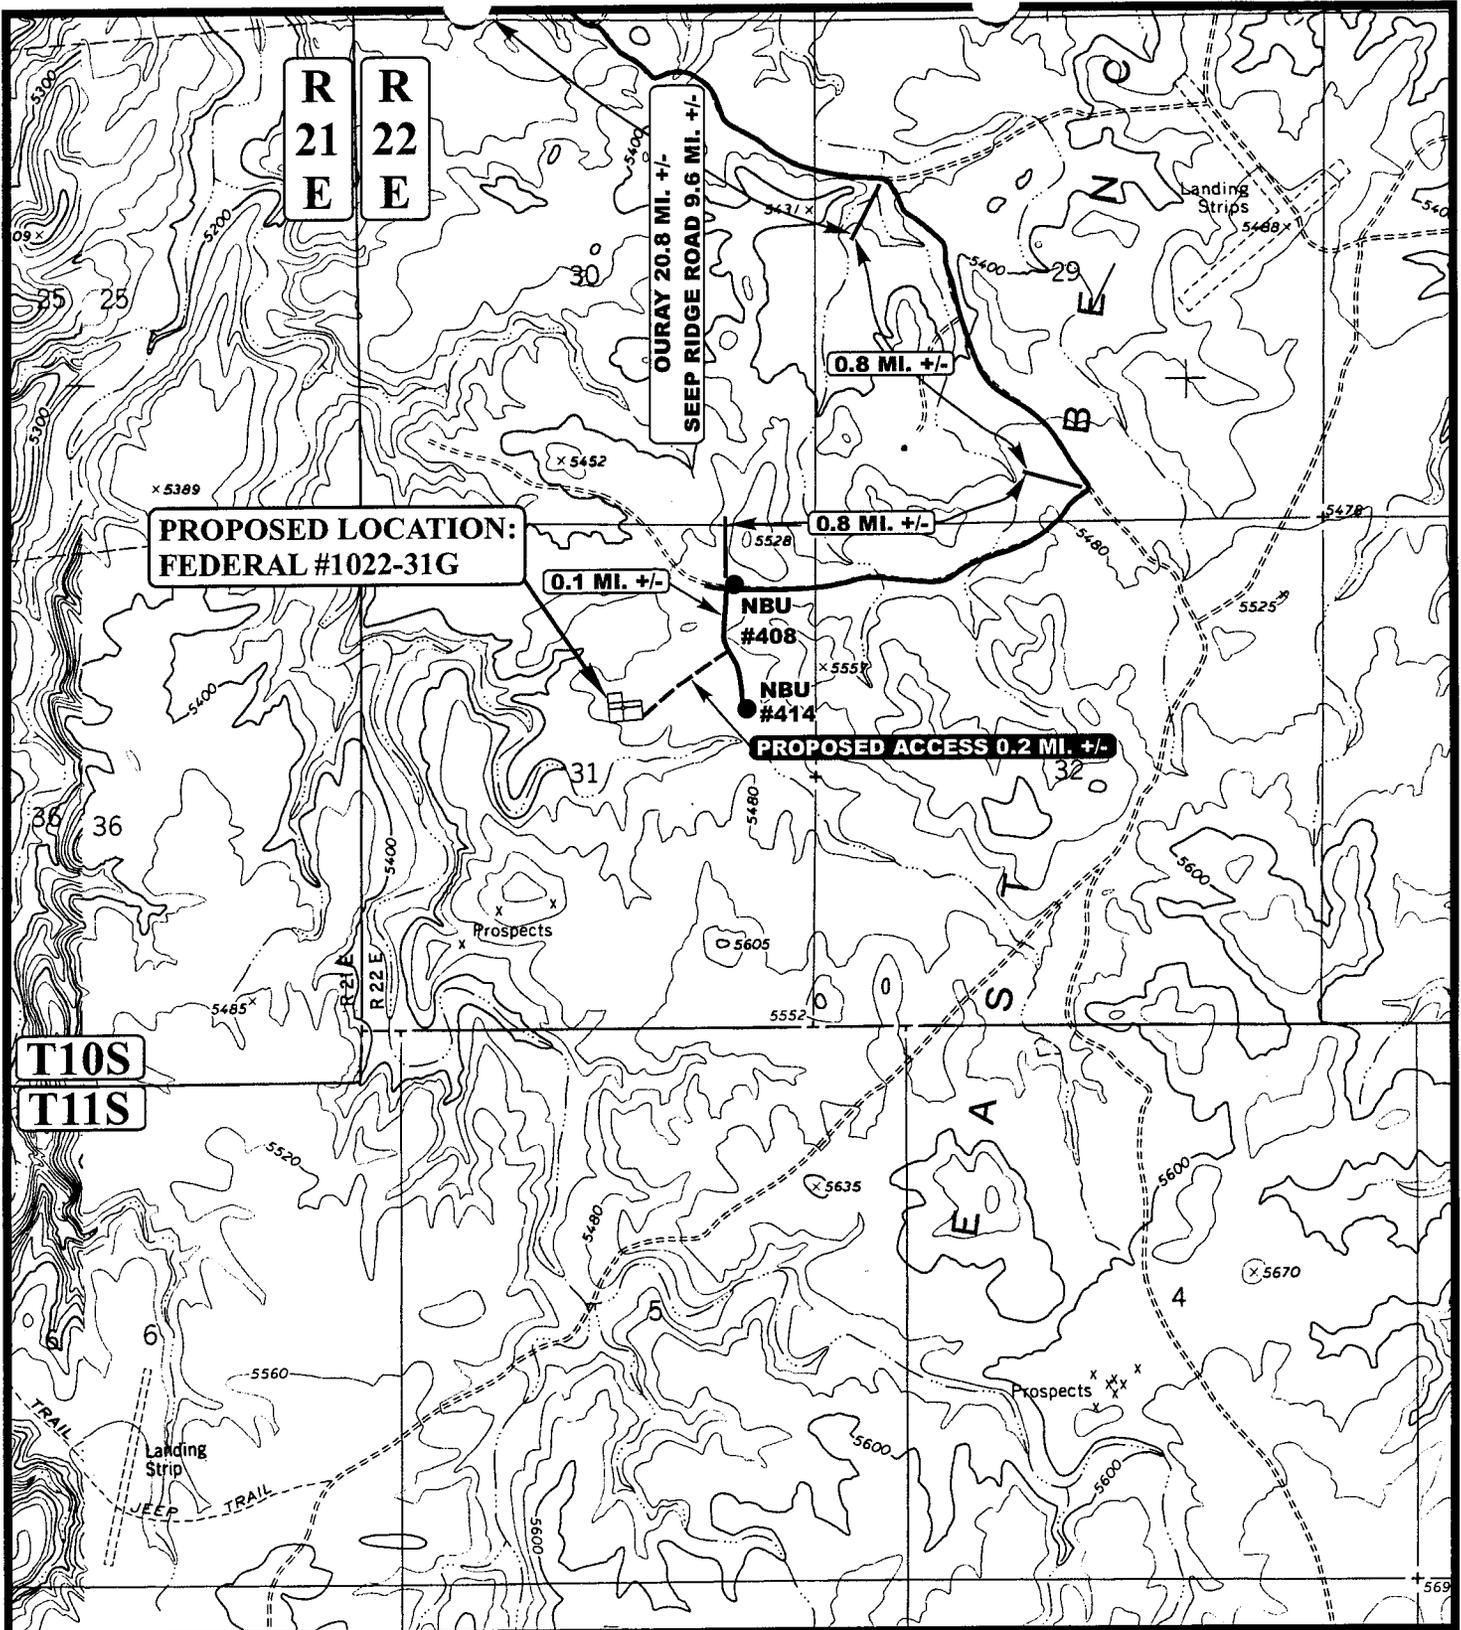

LEGEND:

- EXISTING ROAD
- PROPOSED ACCESS ROAD



WESTPORT OIL AND GAS COMPANY, L.P.

**FEDERAL #1022-31G
SECTION 31, T10S, R22E, S.L.B.&M.
1908' FNL 2019' FEL**




Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**

01	07	05
MONTH	DAY	YEAR

**B
TOPO**

SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 00-00-00

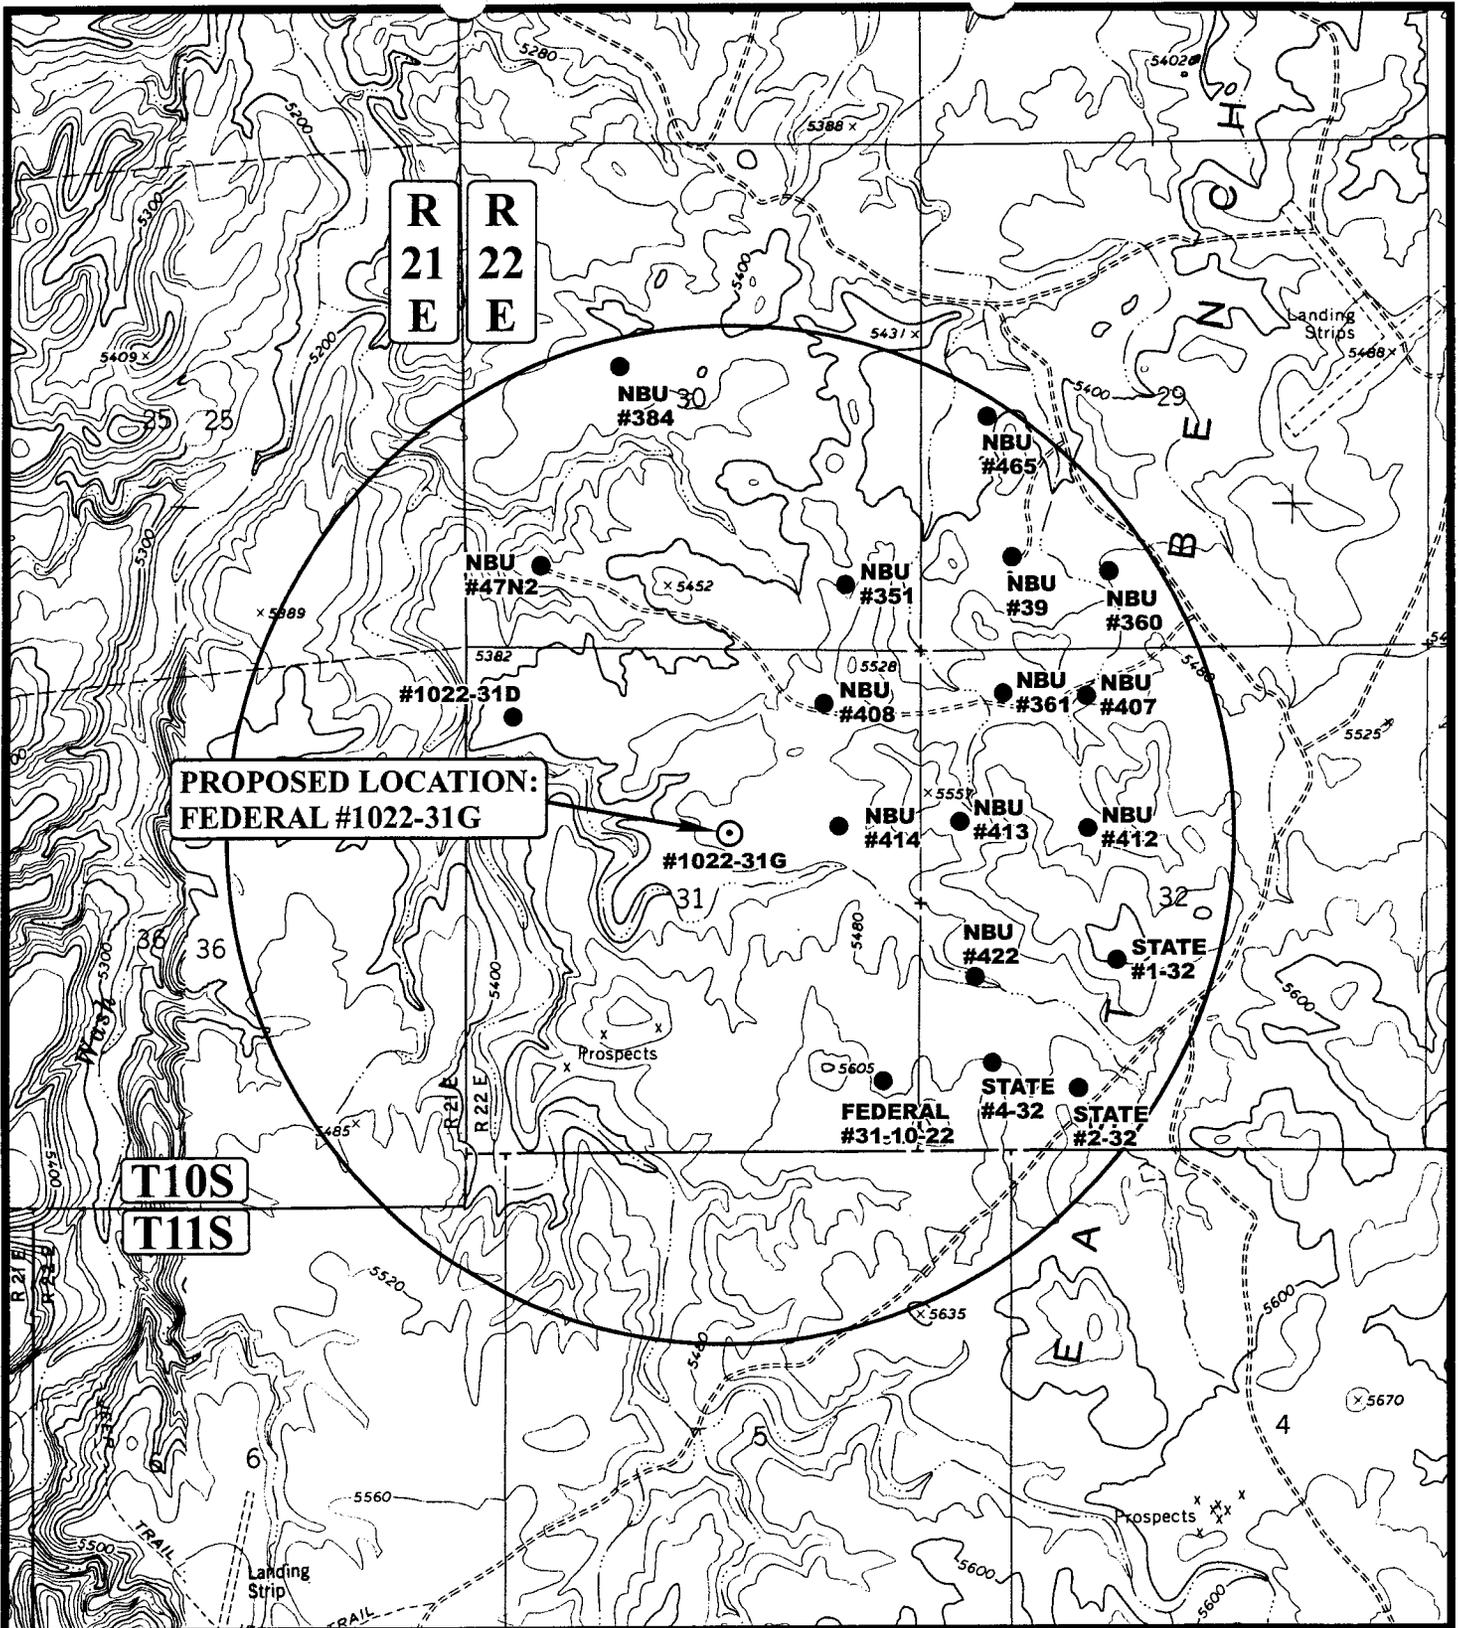

**PROPOSED LOCATION:
FEDERAL #1022-31G**

**T10S
T11S**

LEGEND:

- | | |
|-------------------|-------------------------|
| ⊗ DISPOSAL WELLS | ⊗ WATER WELLS |
| ● PRODUCING WELLS | ⊖ ABANDONED WELLS |
| ⊖ SHUT IN WELLS | ⊖ TEMPORARILY ABANDONED |

WESTPORT OIL AND GAS COMPANY, L.P.

**FEDERAL #1022-31G
SECTION 31, T10S, R22E, S.L.B.&M.
1908' FNL 2019' FEL**



Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813




**TOPOGRAPHIC
MAP**

01 | 07 | 05
MONTH | DAY | YEAR




SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 00-00-00

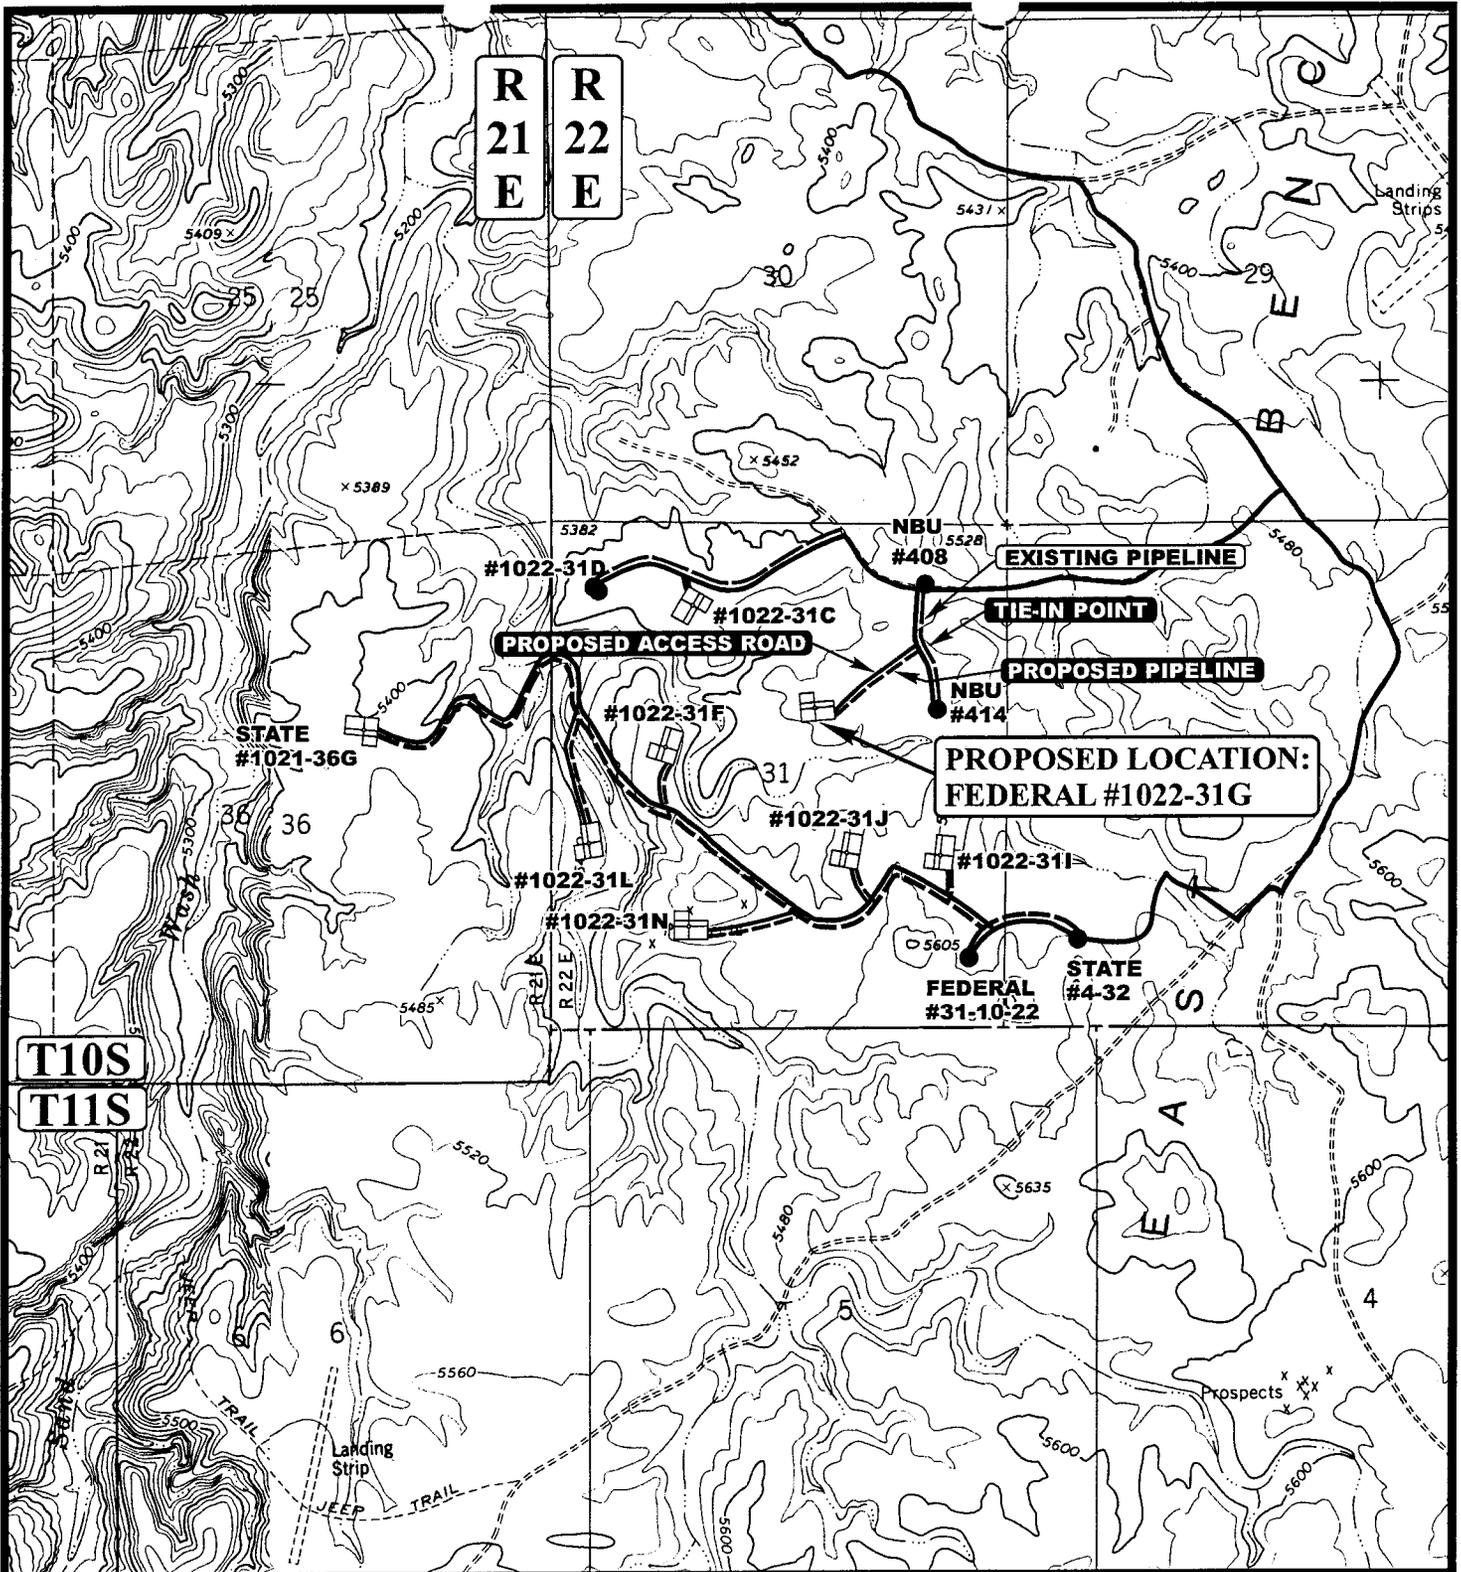

APPROXIMATE TOTAL PIPELINE DISTANCE = 1190' +/-

LEGEND:

-  PROPOSED ACCESS ROAD
-  EXISTING PIPELINE
-  PROPOSED PIPELINE



WESTPORT OIL AND GAS COMPANY, L.P.

FEDERAL #1022-31G
SECTION 31, T10S, R22E, S.L.B.&M.
1908' FNL 2019' FEL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC **01** **07** **05**
MAP MONTH DAY YEAR
 SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 00-00-00



WESTPORT OIL AND GAS COMPANY, L.P.

FIGURE #1

LOCATION LAYOUT FOR


FEDERAL #1022-31G
SECTION 31, T10S, R22E, S.L.B.&M.

C-2.2', 1908' FNL 2019' FEL
El. 56.0'


C-2.4'
El. 56.2'

Approx. Top of Cut Slope

C-1.5'
El. 55.3'




SCALE: 1" = 50'
DATE: 1-14-05
Drawn By: E.C.O.



NOTE:

Flare Pit is to be located a min. of 100' from the Well Head.

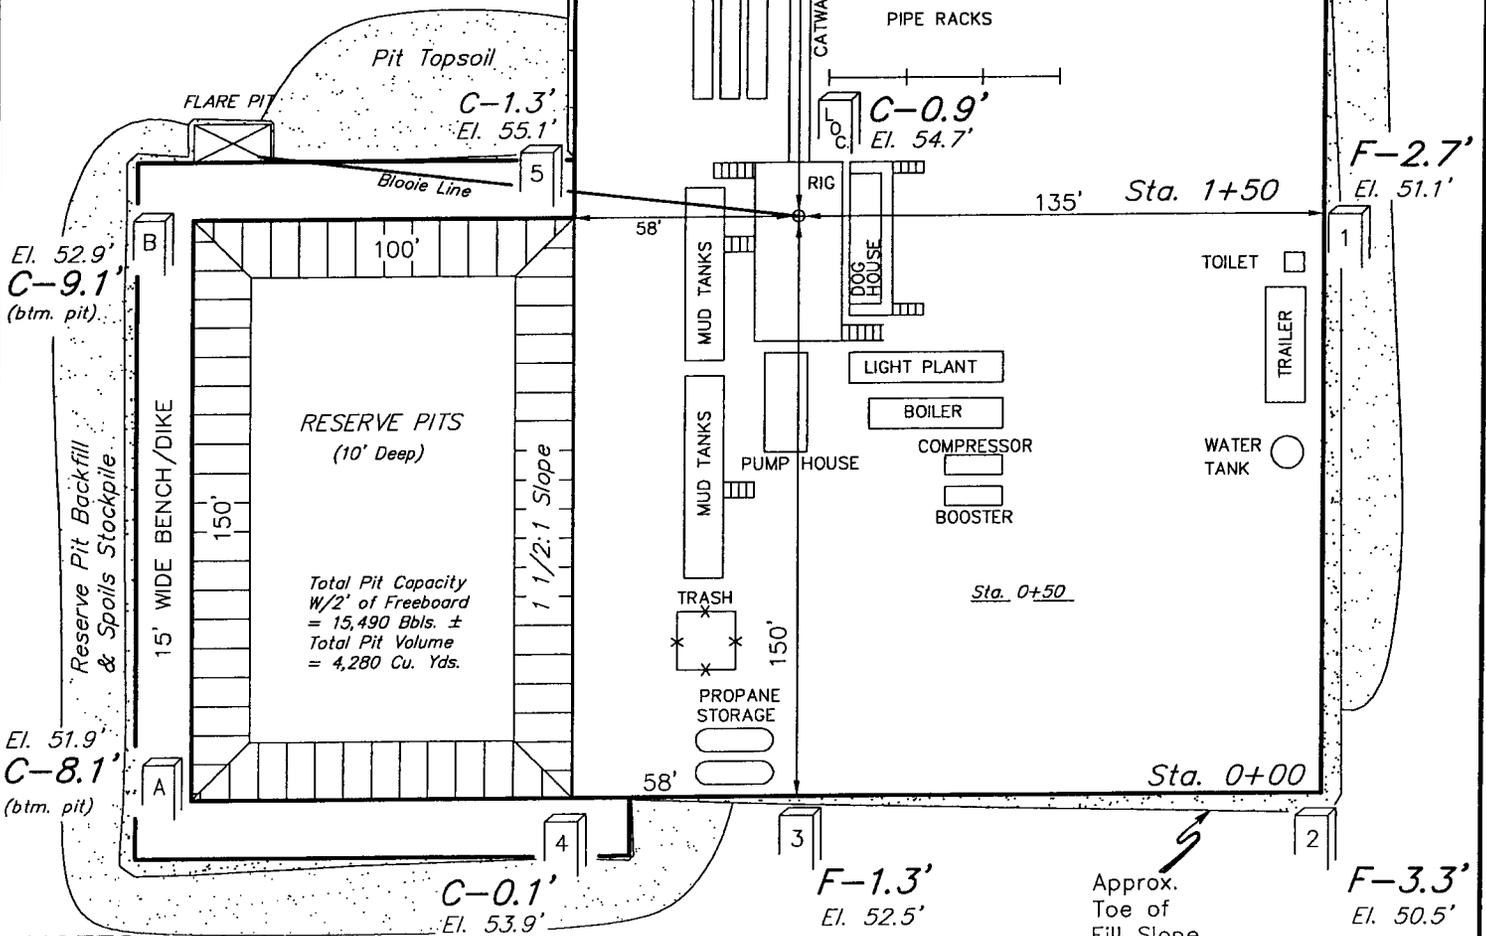

NOTES:

Elev. Ungraded Ground At Loc. Stake = 5454.7'
FINISHED GRADE ELEV. AT LOC. STAKE = 5453.8'

WESTPORT OIL AND GAS COMPANY, L.P.

FIGURE #2

TYPICAL CROSS SECTIONS FOR






FEDERAL #1022-31G

SECTION 31, T10S, R22E, S.L.B.&M.

1908' FNL 2019' FEL

1" = 20'
X-Section Scale
1" = 50'

DATE: 1-14-05
Drawn By: E.C.O.

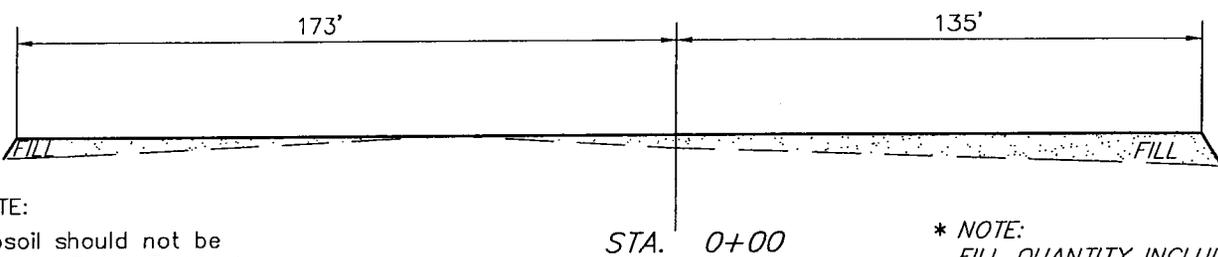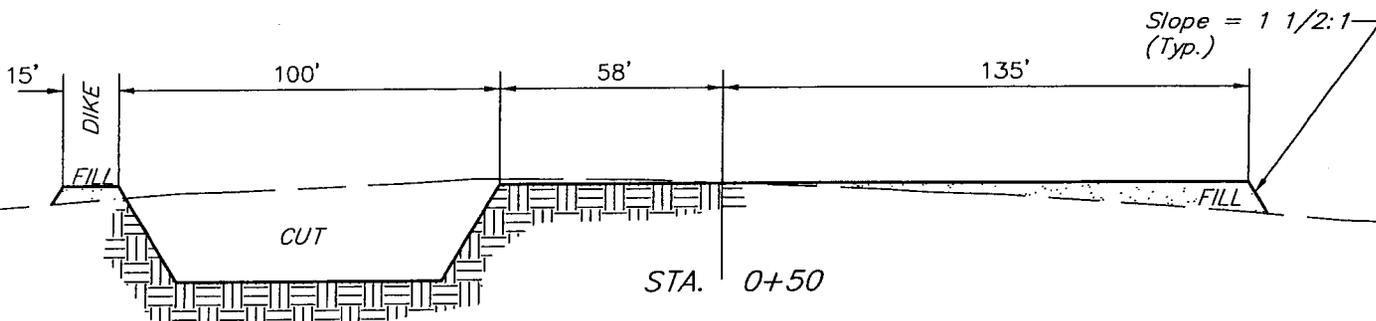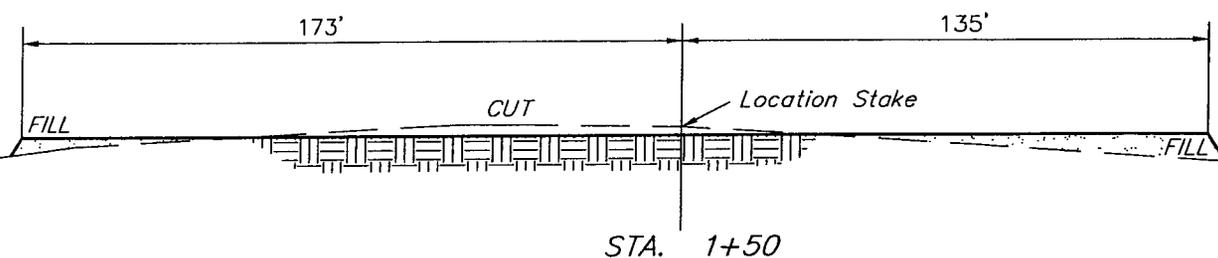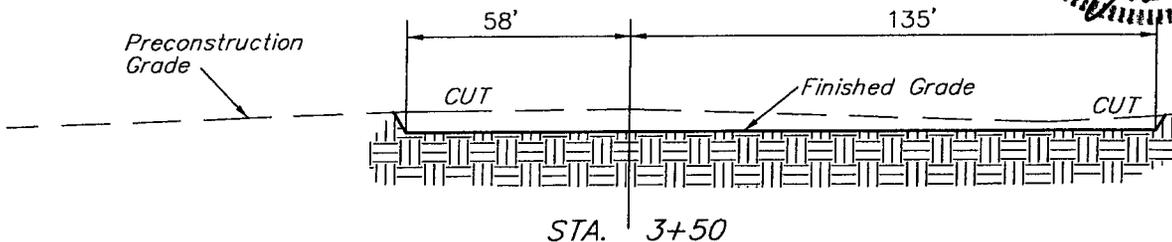

NOTE:
Topsoil should not be Stripped Below Finished Grade on Substructure Area.

* NOTE:
FILL QUANTITY INCLUDES 5% FOR COMPACTION

APPROXIMATE YARDAGES



CUT	
(6") Topsoil Stripping	= 1,750 Cu. Yds.
Remaining Location	= 4,700 Cu. Yds.
TOTAL CUT	= 6,450 CU.YDS.
FILL	= 2,560 CU.YDS.

EXCESS MATERIAL	= 3,890 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,890 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

3,000 PSI

BOP STACK

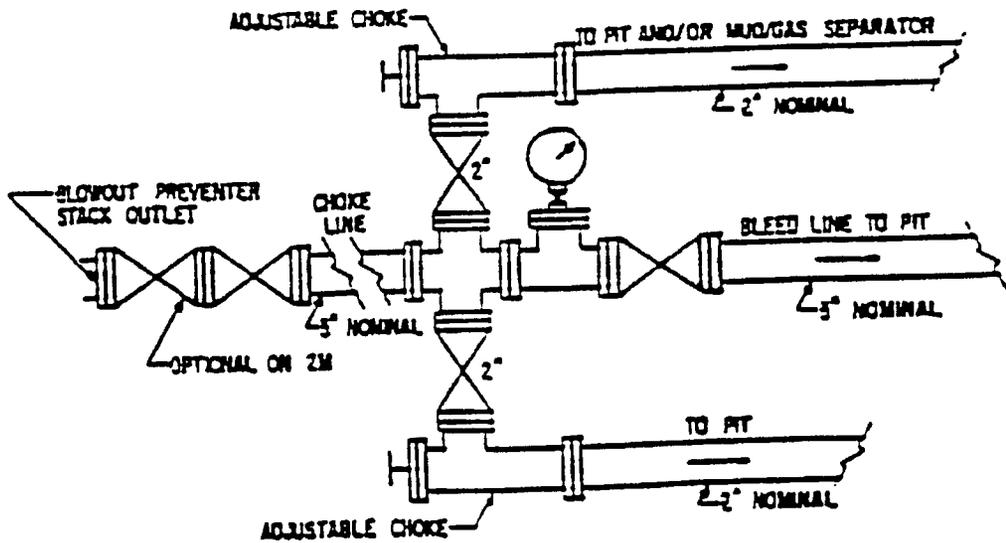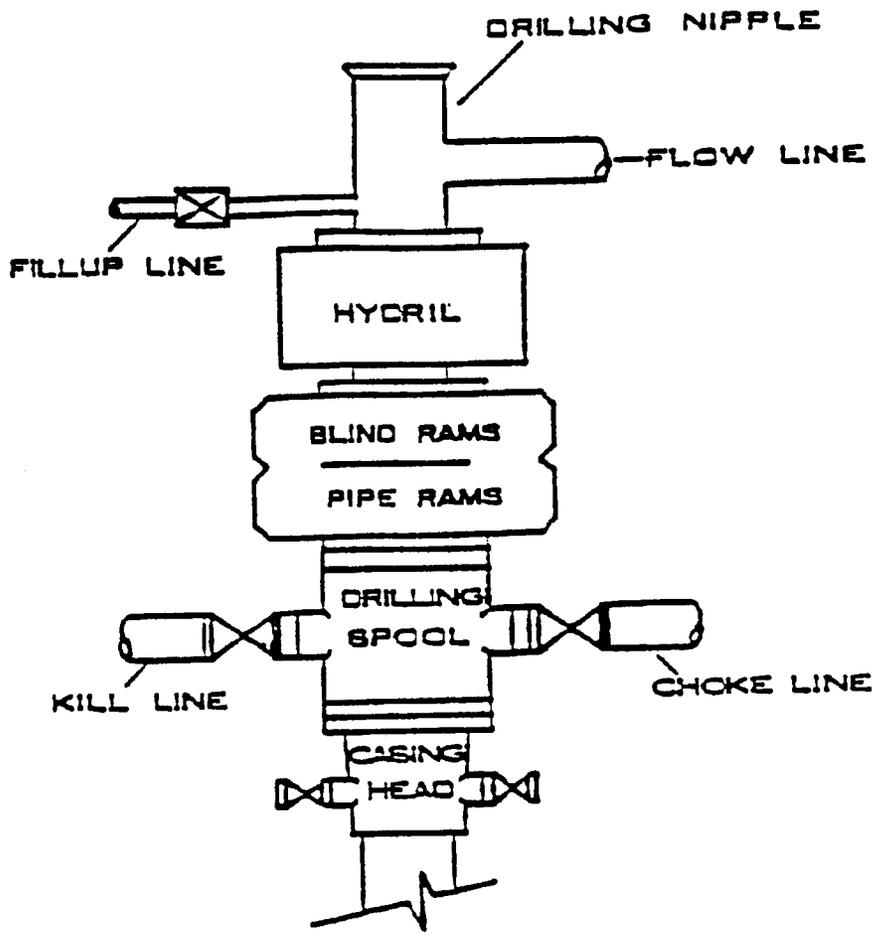

003

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 04/04/2005

API NO. ASSIGNED: 43-047-36494

WELL NAME: FEDERAL 1022-31G
OPERATOR: WESTPORT OIL & GAS CO (N2115)
CONTACT: SHEILA UPCHEGO

PHONE NUMBER: 435-781-7024

PROPOSED LOCATION:
SWNE 31 100S 220E
SURFACE: 1908 FNL 2019 FEL
BOTTOM: 1908 FNL 2019 FEL
UINTAH
NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal
LEASE NUMBER: UTU-0143551
SURFACE OWNER: 1 - Federal
PROPOSED FORMATION: WSMVD
COALBED METHANE WELL? NO

LATITUDE: 39.90731
LONGITUDE: -109.4793

RECEIVED AND/OR REVIEWED:

Plat

Bond: Fed[1] Ind[] Sta[] Fee[]
(No. CO-1203)

Potash (Y/N)

Oil Shale 190-5 (B) or 190-3 or 190-13

Water Permit
(No. 43-8496)

RDCC Review (Y/N)
(Date:)

Fee Surf Agreement (Y/N)

LOCATION AND SITING:

___ R649-2-3.

Unit _____

R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells

___ R649-3-3. Exception

___ Drilling Unit
Board Cause No: _____
Eff Date: _____
Siting: _____

___ R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: _____
1- Federal Approval
2- Spacing Strip
3- OIL SHALE

004



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

MARY ANN WRIGHT
Acting Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

April 6, 2005

Westport Oil & Gas Company LP
1368 South 1200 East
Vernal, UT 84078

Re: Federal 1022-31G Well, 1908' FNL, 2019' FEL, SW NE, Sec. 31, T. 10 South,
R. 22 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-36494.

Sincerely,

A handwritten signature in black ink, appearing to read "John R. Baza".

John R. Baza
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: Westport Oil & Gas Company LP
Well Name & Number Federal 1022-31G
API Number: 43-047-36494
Lease: UTU-0143551

Location: SW NE **Sec.** 31 **T.** 10 South **R.** 22 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

5. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

6. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

APR 04 2005

Form 3160-3
(August 1999)

FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT



APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU-0143551	
b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name	
2. Name of Operator WESTPORT OIL & GAS COMPANY L.P.		7. If Unit or CA Agreement, Name and No.	
3A. Address 1368 SOUTH 1200 EAST VERNAL, UT 84078		8. Lease Name and Well No. FEDERAL 1022-31G	
3b. Phone No. (include area code) (435)-781-7024		9. API Well No. 43-047-36494	
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SWNE 1908'FNL & 2019'FEL At proposed prod. Zone		10. Field and Pool, or Exploratory NATURAL BUTTES	
14. Distance in miles and direction from nearest town or post office* 32.3 MILES SOUTHEAST OF OURAY, UTAH		11. Sec., T., R., M., or Blk, and Survey or Area SECTION 31-T10S-R22E	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1908'	16. No. of Acres in lease 577.36	17. Spacing Unit dedicated to this well 40.00	
18. Distance from proposed* location to nearest well, drilling, completed, applied for, on this lease, ft. REFER TO TOPO C	19. Proposed Depth 8500'	20. BLM/BIA Bond No. on file CO-1203	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5455'GL	22. Approximate date work will start*	23. Estimated duration	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized office. |

25. Signature 	Name (Printed/Typed) SHEILA UPCHEGO	Date 3/29/2005
Title REGULATORY ANALYST		
Approved By (Signature) 	Name (Printed/Typed) Ronald B. Lawrence	Date 08/31/2005
Title Assistant Field Manager Mineral Resources	Office	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

RECEIVED

SEP 14 2005

DIV. OF OIL, GAS & MINING

4006M

CONDITIONS OF APPROVAL ATTACHED

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Westport Oil and Gas Company LP.
Well Name & Number: Federal 1022-31G
Lease Number: U-0143551
API Number: 43-047-36494
Location: SWNE Sec. 31 T.10S R. 22E
Agreement: N/A

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

CONDITIONS OF APPROVAL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

A. **DRILLING PROGRAM**

1. **Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered**

Report ALL water shows and water-bearing sands to John Mayers of this office prior to setting the next casing string or requesting plugging orders. Faxed copies of State of Utah form OGC-8-X are acceptable.

2. **Pressure Control Equipment**

The variances requested in section 9 of the NBU Field SOP are granted with the following conditions:

Where the location and rig layout allows, the blooie line shall be straight and extend 100' from the wellbore. This requirement will be waived only in the case where the location is too small to accommodate it.

3. Casing Program and Auxiliary Equipment

As a minimum requirement, the cement behind the production casing must extend at least 200' above the surface casing shoe.

4. Mud Program and Circulating Medium

None

5. Coring, Logging and Testing Program

Cement Bond Logs will be required from TD to the top of cement.

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

Please submit an electronic copy of all logs run on this well in LAS format. This submission will supersede the requirement for submittal of paper logs to the BLM. The cement bond log must be submitted in raster format (TIF, PDF or other).

6. Notifications of Operations

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

7. Other Information

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, you must contact one of the following individuals:

Michael Lee (435) 828-7875
Petroleum Engineer

Matt Baker (435) 828-4470
Petroleum Engineer

BLM FAX Machine (435) 781-4410

- If any paleontological or cultural materials are encountered, stop work immediately and report the find to this office.
- Paint all facilities Fuller O'Brian color Carlsbad Canyon (2.5Y 6/2). Any paint brand may be used provided the colors match.
- No drilling or construction would be allowed between May 15th through June 20th to protect pronghorn during kidding season.
- The authorized officer may prohibit surface disturbing activities during wet and muddy periods to minimize watershed damage. This limitation does not apply to operation and maintenance of producing wells.
- The seed mix for this location shall be:

Wyoming big sage	<i>Artemisia tridentata</i>	1lbs. /acre
Galleta grass	<i>Hilaria jamesii</i>	3lbs. /acre
Scarlet globemallow	<i>Sphaeralcea coccinea</i>	4lbs. /acre
Shadscale	<i>Atriplex confertifolia</i>	4lbs. /acre

 - All pounds are in pure live seed.
 - Reseeding may be required if first seeding is not successful.
- The topsoil from the reserve pit should be stripped and piled separately near the reserve pit. When the reserve pit is closed, it shall be recontoured and the topsoil respread, and the area shall be seeded in the same manner as the location topsoil.
- Once the location is plugged and abandoned, it shall be recontoured to natural contours, topsoil respread where appropriate, and the entire location seeded with the recommended seed mix. Seeding should take place by broadcasting the seed and walking it into the soil with a dozer immediately after the dirt work is completed.
- Within 90 calendar days of the approval date for this Application for Permit to Drill (APD), the operator/lessee shall submit to the Authorized Officer (AO), on Sundry Notice Form 3160-5, an Interim Surface Reclamation Plan for surface disturbance on well pads, access roads, and pipelines. At a minimum, this will include the reshaping of the pad to the original contour to the extent possible; the respreading of the top soil up to the rig anchor points; and, the area reseeded using appropriate reclamation methods. The AO will provide written approval or concurrence within 30 calendar days of receipt.

Within 90 calendar days of the approval date for this Application for Permit to Drill (APD), the operator/lessee shall submit to the Authorized Officer (AO), on Sundry Notice Form 3160-5, an Interim Surface Reclamation Plan for surface disturbance on well pads, access roads, and pipelines. At a minimum, this will include the reshaping of the pad to the original contour to the extent possible; the respreading of the top soil up to the rig anchor points; and, the area reseeded using appropriate reclamation methods. The AO will provide written approval or concurrence within 30 calendar days of receipt

The pipeline shall be buried within the identified construction width of an access corridor that contains the access road and pipelines. The operator may request in writing an exception to this COA. Exceptions to this COA may be include but are not limited to: laterally extensive, hard indurated bedrock, such as sandstone, which is at or within 2 feet of the surface; and, soil types

with a poor history for successful rehabilitation. The exception request will be reviewed by the authorized officer (AO) and a determination made.

Prior to abandonment of a buried pipeline, the operator will obtain authorization from the appropriate regulatory agency. BLM will determine whether the pipeline and all above ground pipeline facilities shall be removed and unsalvageable materials disposed of at approved sites or abandoned in place. Reshaping and revegetation of disturbed land areas will be completed where necessary.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. UTU-0143551
2. Name of Operator WESTPORT OIL & GAS COMPANY, L.P.		6. If Indian, Allottee or Tribe Name
3a. Address 1368 SOUTH 1200 EAST, VERNAL, UTAH 84078	3b. Phone No. (include area code) 435-781-7060	7. If Unit or CA/Agreement, Name and/or No.
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) SWNE SEC 31-T10S-R22E 1908' FNL 2019' FEL		8. Well Name and No. FEDERAL 1022-31G
		9. API Well No. 43-047-36494
		10. Field and Pool, or Exploratory Area NATURAL BUTTES
		11. County or Parish, State UINTAH, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input checked="" type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input type="checkbox"/> Other
			PIPELINE BURIAL
			EXCEPTION

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

OPERATOR REQUESTS AN EXCEPTION TO THE CONDITION OF APPROVAL THAT THE PIPELINE SHALL BE BURIED. THE EXCEPTION TO THIS BEST MANAGEMENT PRACTICE SHOULD BE GRANTED BY THE AUTHORIZING OFFICER BECAUSE INDURATED BEDROCK IS AT OR WITHIN 2 FEET OF THE SURFACE AND THE SOIL HAS A POOR HISTORY FOR SUCCESSFUL REHABILITATION.

COPY SENT TO OPERATOR
Date: 9-22-05
Initials: CJO

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) DEBRA DOMENICI	Title ASSOCIATE ENVIRONMENTAL ANALYST
Signature <i>Debra Domenici</i>	Date September 19, 2005

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title ACCEPTED Utah Division	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office Oil, Gas and Mining	Federal Approval Of This Action Is Necessary
Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.	Date 9/27/05	

(Instructions on reverse)

By: [Signature]
RECEIVED
SEP 26 2005 2 6 2005
DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU-0143551

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
FEDERAL 1022-31G

9. API Well No.
43-047-36494

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH, UTAH

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY, L.P.

3a. Address
1368 SOUTH 1200 EAST, VERNAL, UTAH 84078

3b. Phone No. (include area code)
435-781-7060

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SWNE SEC 31-T10S-R22E
1908' FNL 2019' FEL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize <input type="checkbox"/> Deepen <input type="checkbox"/> Production (Start/Resume) <input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing <input type="checkbox"/> Fracture Treat <input type="checkbox"/> Reclamation <input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair <input type="checkbox"/> New Construction <input type="checkbox"/> Recomplete <input type="checkbox"/> Other
	<input checked="" type="checkbox"/> Change Plans <input type="checkbox"/> Plug and Abandon <input type="checkbox"/> Temporarily Abandon INTERIM SURFACE
	<input type="checkbox"/> Convert to Injection <input type="checkbox"/> Plug Back <input type="checkbox"/> Water Disposal RECLAMATION PLAN

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

WHEN THE PIT IS BACKFILLED OPERATOR SHALL SPREAD THE TOPSOIL PILE ON THE LOCATION UP TO THE ANCHOR POINTS. THE LOCATION WILL BE RESHAPED TO THE ORIGINAL CONTOUR TO THE EXTENT POSSIBLE. OPERATOR WILL RESEED THE AREA USING THE BLM RECOMMENDED SEED MIXTURE AND RECLAMATION METHODS.

COPY SENT TO OPERATOR
Date: 9-22-05
Initials: GHO

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) DEBRA DOMENICI Title ASSOCIATE ENVIRONMENTAL ANALYST

Signature *Debra Domenici* Date September 19, 2005

THIS SPACE FOR FEDERAL OR STATE USE

Approved by Title Date

Office **Utah Division of Oil, Gas and Mining** Date: 9/27/05

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Federal Approval Of This Action Is Necessary

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

SEP 26 2005
DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No. UTU-0143551
6. If Indian, Allottee or Tribe Name
7. If Unit or CA/Agreement, Name and/or No.
8. Well Name and No. FEDERAL 1022-31G
9. API Well No. 43-047-36494
10. Field and Pool, or Exploratory Area NATURAL BUTTES
11. County or Parish, State UINTAH, UTAH

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY, L.P.

3a. Address
1368 SOUTH 1200 EAST, VERNAL, UTAH 84078

3b. Phone No. (include area code)
435-781-7060

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
**SWNE SEC 31-T10S-R22E
1908' FNL 2019' FEL**

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize <input type="checkbox"/> Deepen <input type="checkbox"/> Production (Start/Resume) <input type="checkbox"/> Water Shut-Off <input type="checkbox"/> Alter Casing <input type="checkbox"/> Fracture Treat <input type="checkbox"/> Reclamation <input type="checkbox"/> Well Integrity <input type="checkbox"/> Subsequent Report <input type="checkbox"/> Casing Repair <input type="checkbox"/> New Construction <input type="checkbox"/> Recomplete <input type="checkbox"/> Other AMENDED <input type="checkbox"/> Final Abandonment Notice <input checked="" type="checkbox"/> Change Plans <input type="checkbox"/> Plug and Abandon <input type="checkbox"/> Temporarily Abandon INTERIM SURFACE <input type="checkbox"/> Convert to Injection <input type="checkbox"/> Plug Back <input type="checkbox"/> Water Disposal RECLAMATION PLAN

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

WHEN THE PIT IS BACKFILLED, WITHIN 180 DAYS OF COMPLETION, OPERATOR SHALL SPREAD THE TOPSOIL PILE ON THE LOCATION UP TO THE RIG ANCHOR POINTS. THE LOCATION WILL BE RESHAPED TO THE ORIGINAL CONTOUR TO THE EXTENT POSSIBLE. OPERATOR WILL RESEED THE AREA USING THE BLM RECOMMENDED SEED MIXTURE AND RECLAMATION METHODS.

**Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY**

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) DEBRA DOMENICI	Title ASSOCIATE ENVIRONMENTAL ANALYST
Signature <i>Debra Domenici</i>	Date October 28, 2005

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED

NOV 02 2005

DIV. OF OIL, GAS & MINING

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

Name of Company: WESTPORT OIL & GAS COMPANY LP

Well Name: FEDERAL 1022-31G

Api No: 43-047-36494 Lease Type: FEDERAL

Section 31 Township 10S Range 22E County UINTAH

Drilling Contractor BILL JR'S RIG # AIR

SPUDDED:

Date 11/21/05

Time _____

How DRY

Drilling will Commence: _____

Reported by KENNY MORRIS

Telephone # 1-435-828-0985

Date 11/22/2005 Signed CHD

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: WESTPORT OIL & GAS COMPANY L.P. Operator Account Number: N 2115
 Address: 1368 SOUTH 1200 EAST
city VERNAL
state UT zip 84078 Phone Number: (435) 781-7024

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304736494	FEDERAL 1022-31G		SWNE	31	10S	22E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
A	99999	15075	11/22/2005			11/23/05	
Comments: MIRU PETE MARTIN BUCKET RIG. <i>WSTMVD</i> SPUD WELL LOCATION ON 11/22/05 AT 1300 HRS. <i>not in unit - J</i>							

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
Comments:							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
Comments:							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

(6/2000)

To <u>EARLENE Russell</u>	From <u>SHEILA UPCHEGO</u>
Co./Dept. <u>LD D0617</u>	Co. <u>WESTPORT OIL & GAS CO</u>
Phone <u>(801) 539-5320</u>	Phone <u>(435) 781-7024</u>
Fax # <u>(801) 359-3940</u>	Fax # <u>(435) 781-7024</u>

SHEILA UPCHEGO

Name (Please Print)

[Signature]
Signature

REGULATORY ANALYST 11/23/2005

Title

RECEIVED

NOV 23 2005

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU-0143551

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
FEDERAL 1022-31G

9. API Well No.
43-047-36494

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY L.P.

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SWNE SECTION 31-T10S-R22E 1908'FNL & 2019'FEL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other <u>WELL SPUD</u>

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

MIRU PETE MARTIN BUCKET RIG. DRILLED 20" CONDUCTOR HOLE TO 40'.
RAN 14" 36.7# SCHEDULE 10 PIPE. CMT W/28 SX READY MIX.

SPUD WELL LOCATION ON 11/22/2005 AT 1300 HRS.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) Sheila Upchego	Title Regulatory Analyst
Signature 	Date November 23, 2005

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED

NOV 30 2005

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU-0143551

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE – Other instructions on reverse side

8. Well Name and No.
FEDERAL 1022-31G

9. API Well No.
43-047-36494

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH COUNTY, UTAH

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY L.P.

3a. Address **1368 SOUTH 1200 EAST VERNAL, UT 84078**
3b. Phone No. (include area code) **(435) 781-7024**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SWNE SECTION 31-T10S-R22E 1908'FNL & 2019'FEL


12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other SET SURFACE
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	CSG
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

MIRU BILL MARTIN AIR RIG. DRILLED 12 1/4" SURFACE HOLE TO 1860'. RAN 9 5/8" 32.3# H-40 SURFACE CSG. LEAD CMT W/160 SX CLASS G @11.0 PPG 3.82 YIELD. TAILED CMT W/200 SX CLASS G @15.6 PPG 1.18 YIELD. 1" TAIL 100 SX CLASS G @15.6 PPG 1.18 YIELD. TOP OUT W/100 SX CLASS G @15.6 PPG 1.18 YIELD. CMT TO SURFACE.

WORT

14. I hereby certify that the foregoing is true and correct **DEC 06 2005**
Name (Printed/Typed) **Sheila Upchego** Title **Regulatory Analyst**
Signature  Date **November 29, 2005**

THIS SPACE FOR FEDERAL OR STATE USE

Approved by _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Office _____

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU-0143551

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
FEDERAL 1022-31G

9. API Well No.
43-047-36494

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY L.P.

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SWNE SECTION 31-T10S-R22E 1908'FNL & 2019'FEL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other FINAL DRILLING OPERATIONS

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

FINISHED DRILLING FROM 1860' TO 8560'. RAN 4 1/2" 11.6# I-80 PRODUCTION CSG.
 LEAD CMT W/285 SX PREM LITE II @11.0 PPG 3.82 YIELD. TAILED CMT W/1226 SX
 50/50 POZ @14.3 PPG 1.31 YIELD. SET SLIP @85K CLEAN MUD TANKS.

RELEASED PIONEER RIG 38 ON 12/20/05 AT 0600 HRS.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) Sheija Upchego	Title Regulatory Analyst
Signature 	Date December 20, 2005

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU-0143551

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
FEDERAL 1022-31G

9. API Well No.
43-047-36494

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY L.P.

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SWNE SECTION 31-T10S-R22E 1908'FNL & 2019'FEL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other PRODUCTION START-UP
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

THE SUBJECT WELL LOCATION WAS PLACED ON PRODUCTION ON 01/15/2006 AT 1:00 PM.

PLEASE REFER TO THE ATTACHED CHRONOLOGICAL WELL HISTORY.

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) Sheila Upchego	Title Regulatory Analyst
Signature 	Date January 17, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

WESTPORT OIL & GAS COMPANY, LP

CHRONOLOGICAL HISTORY

FEDERAL 1022-31G

UINTAH COUNTY, UT

SPUD	Surface Casing	Activity	Status
11/03/05		Build Location, 10% complete	Pioneer 38
11/04/05		Build Location, 25% complete	Pioneer 38
11/07/05		Build Location, 40% complete	Pioneer 38
11/08/05		Build Location, 55% complete	Pioneer 38
11/09/05		Build Location, 55% complete	Pioneer 38
11/10/05		Build Location, 70% complete	Pioneer 38
11/14/05		Location Built, WOBR	Pioneer 38
11/21/05	11/17/05	Set conductor, 11/17/05. WOAR	Pioneer 38
11/28/05	11/21/05	9 5/8" @ 1844' Air Rig Spud 11/21/05, Wort, Working on ring	Pioneer38
11/29/05	11/21/05	9 5/8" @ 1844' Celler ring in, 11/28/05, WORT	Pioneer38
12/07/05	TD: 1860'	Csg. 9 5/8"@ 1844' MW: 8.3 SD: 12/XX/05 DSS: 0 Move to Federal 1022-31G, 100% moved, 50% rigged up.	
12/08/05	TD: 1860'	Csg. 9 5/8"@ 1844' MW: 8.3 SD: 12/XX/05 DSS: 0 RURT. Thaw frozen lines.	
12/09/05	TD: 1860'	Csg. 9 5/8"@ 1844' MW: 8.3 SD: 12/XX/05 DSS: 0 Thaw frozen lines and NUBOPE. Start BOP test. Boiler broke and BOP stack froze up. Could not finish test. Waiting on parts to repair boiler. Rig on repair @ report time.	
12/12/05	TD: 4268'	Csg. 9 5/8"@ 1844' MW: 9.8 SD: 12/11/05 DSS: 1 Repair boiler. Test BOPE. RIH with 7 7/8" PDC bit and Mud Motor and drill cement and FE. Drill from 1828'-4019'. Took kick and shut in well. Mud up and kill well. Drill from 4019'-4268'. DA @ report time.	
12/13/05	TD: 5884'	Csg. 9 5/8"@ 1844' MW: 10.1 SD: 12/11/05 DSS: 3 Drill from 4268'-5884'. DA @ report time.	
12/14/05	TD: 6834'	Csg. 9 5/8"@ 1844' MW: 10.3 SD: 12/11/05 DSS: 4 Drill from 5884'-6834'. DA @ report time.	

JAN 23 2006

12/15/05 TD: 7619' Csg. 9 5/8"@ 1844' MW: 10.3 SD: 12/11/05 DSS: 5
Drill from 6834'-7619'. DA @ report time.

12/16/05 TD: 8111' Csg. 9 5/8"@ 1844' MW: 10.8 SD: 12/11/05 DSS: 6
Drill from 7619'-8111'. Raise MW to 10.8 to control sloughing shales. DA @ report time.

12/19/05 TD: 8560' Csg. 9 5/8"@ 1844' MW: 11.5 SD: 12/11/05 DSS: 9
Drill from 8111'-8560' TD. Circulate out gas and short trip to 3000'. CCH for logs. POOH.
Hole tight to 7100'. RIH and CCH. POOH and run triple combo. TIH and CCH for casing. POOH laying down drill string @ report time.

12/20/05 TD: 8560' Csg. 9 5/8"@ 1844' MW: 11.5 SD: 12/11/05 DSS: 10
Finish laying down drill string. Run and cement 4 1/2" Production Casing set @ 8538'. Set slips and release rig @ 0600 hrs 12/20/05. RDRT @ report time.

12/21/05 TD: 8560' Csg. 9 5/8"@ 1844' MW: 11.5 SD: 12/11/05 DSS: 10
RDRT in preparation to move to Federal 1022-31C this am.

01/12/06 PROG: 7:00 AM MOVE IN RU RIG. SPOT EQUIP. ND WLHEAD. NU BOP. PU 3-7/8" MILL. RIH PU 2-3/8" TBG. GOT TO 4800'. POOH. STANDING BACK TBG. ND BOP. NU FRAC VALVES. PRESS TEST TO 7500#. PREP TO FRAC. SWI 5:00 PM.

01/12/06 PROG: RU CUTTERS & BJ. PERFD 8055-8058 & 8230-8235' =32 HOLES, GOT 31,000# OF SD INTO PERFS, SCREENED OFF, FLWD WL, GOT FLUSHED, PERF STAGE 2 7185-7189 & 7287-7292' =36 HOLES, PMP 258,670# OF SD. RIH SET CBP. PERF 6827-6829 & 7047-7053' =32 HOLES, PMP 35,000# OF SD. STAGE 4 RIH SET CBP. PERF 6380-6385 & 6557-6561'. PREP TO FRAC IN AM.

01/13/06 PROG: 7:00 AM STAGE 4#: OPEN WL SIP 550. BROKE @ 3074, INJ R: 23.2, INJ P: 3670, ISIP: 2650, FG: .90, MP: 3486, MR: 25.1, AP: 3318, AR: 25, FG: .90, ISIP: 2990, NPI: 340, CLEAN 473, SD 52,274#.

STAGE 5#: RIH SET CBP @ 5410, PERF 5368-80, 4 SPF, 48 HOLES, BROKE @ 2929, INJ R: 20.5, INJ P: 1880, ISIP: 1200, FG: .66, MP: 2240, MR: 20.3, AP: 2151, AR: 20.2, FG: .86, ISIP: 2290, NPI: 1090, CLEAN 722, SD 94,153#. RIH SET CBP @ 5300. RD CUTTERS & BJ. ND FRAC VALVES. NU BOP. PU 3-7/8" BIT, POBS. RIH W/2-3/8" TBG. TAG TOP KILL @ 5300. RU DRL EQUIP. BROKE CONV CIRC. DRILL UP CBP, 100# INC, RIH, TAG @ 6560, DRL DN TO CBP @ 6550. DRL UP CBP. CIRC WL CLEAN POOH TO 5300. SWI 5:00 PM.

01/14/06 PROG: 7:00 AM OPEN WL 2000# ON WELL, OPEN TO PIT . RIH, TAG @ 8193. DRL & CIRC DN TO 8350. CIRC WL CLEAN. POOH LD EXCESS TBG. 224 JTS IN WL, LAND TBG W/EOT @ 7094. ND BOP. NU WLHEAD. DROP BALL POBS. PUT WL FLWG TO PIT 12:00 PM 500# ON CSG. 3000 BBLS LEFT TO REC.

01/15/06: WELL ON FLOWBACK, FLOWBACK REPORT: CP: 1500#, TP: 950#, 22/64 CHK, 20 BWPH, 19 HRS, SD: TRACE, TTL BBLS FLWD: 2070, TODAY'S LTR: 4500 BBLS, LOAD REC TODAY: 2070 BBLS, REMAINING LTR: 2430 BBLS, TOTAL LOAD REC TO DATE: N/A BBLS.

JAN 23 2006

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires: November 30, 2000

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5. Lease Serial No.
UTU-0143551

1a. Type of Well Oil Well Gas Dry Other
b. Type of Completion: New Work Over Deepen Plug Back Diff. Resrv.
Other _____

6. If Indian, Allottee or Tribe Name

7. Unit or CA Agreement Name and No.

2. Name of Operator
WESTPORT OIL & GAS COMPANY L.P.

8. Lease Name and Well No.
FEDERAL 1022-31G

3. Address **1368 SOUTH 1200 EAST VERNAL, UTAH 84078**
3a. Phone No. (include area code) **(435)-781-7024**

9. API Well No.
43-047-36494

4. Location of Well (Report locations clearly and in accordance with Federal requirements)*
At surface **SWNE 1908'FNL & 2019'FEL**

10. Field and Pool, or Exploratory
NATURAL BUTTES

At top prod. interval reported below

11. Sec., T., R., M., or Block and Survey or Area **SEC 31-T10S-R22E**

At total depth

12. County or Parish **UINTAH** 13. State **UTAH**

14. Date Spudded **11/22/05** 15. Date T.D. Reached **12/16/05** 16. Date Completed D & A Ready to Prod. **01/15/06**

17. Elevations (DF, RKB, RT, GL)*
5455'GL

18. Total Depth: MD **8560'** TVD **MD 8494'** TVD

20. Depth Bridge Plug Set: MD **MD** TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
CBL-CCL-GR

22. Was well cored? No Yes (Submit copy)
Was DST run? No Yes (Submit copy)
Directional Survey? No Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
20"	14"	36.7#		40'		28 SX			
12 1/4"	9 5/8"	32.3#		1860'		560 SX			
7 7/8"	4 1/2"	11.6#		8560'		1511 SX			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Set (MD)
2 3/8"	7095'							

25. Producing Intervals **WSMVD** 26. Perforation Record

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) WASATCH	5368'	5380'	5368'-5380'	0.34	48	OPEN
B) WASATCH/MESAVERDE	6380'	6561'	6380'-6561'	0.35	36	OPEN
C) MESAVERDE	6827'	8235'	6827'-8235'	0.35	100	OPEN
D)						

27. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Depth Interval	Amount and type of Material
5368'-5380'	PMP 722 BBLs LIGHTNING 18 & 94,153# 20/40 MESH SD
6380'-6561'	PMP 473 BBLs LIGHTNING 18 & 52,274# 20/40 MESH SD
6827'-8235'	PMP 2915 BBLs LIGHTNING 18 & 20, & 324,670# 20/40 MESH SD

FEB 27 2006

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
01/15/06	01/16/06	24	→	0	2,238	350			FLows FROM WELL
Choke Size	Tbg. Press. Flwg. 1100#	Csg. Press. 1500#	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Well Status	
22/64	SI	1500#	→	0	2238	350			PRODUCING GAS WELL

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
01/15/06	01/16/06	24	→	0	2238	350			FLows FROM WELL
Choke Size	Tbg. Press. Flwg. 1100#	Csg. Press. 1500#	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Well Status	
22/64	SI	1500#	→	0	2238	350			PRODUCING GAS WELL

(See instructions and spaces for additional data on reverse side)

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
01/15/06	01/16/06	24	→	0	2238	350			FLOWS FROM WELL
Choke Size	Tbg. Press. Flwg. 1100# SI	Csg. Press. 1500#	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	
22/64	SI	1500#	→	0	2238	350		PRODUCING GAS WELL	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas : Oil Ratio	Well Status	
			→						

29. Disposition of Gas (Sold, used for fuel, vented, etc.)

SOLD

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
WASATCH MESAVERDE	4061' 6513'	6513'			


32. Additional remarks (include plugging procedure):

33. Circle enclosed attachments:

- 1. Electrical/Mechanical Logs (1 full set req'd.)
- 2. Geologic Report
- 3. DST Report
- 4. Directional Survey
- 5. Sundry Notice for plugging and cement verification
- 5. Core Analysis
- 7. Other:

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) SHEILA UPCHEGO Title REGULATORY ANALYST

Signature  Date 2/14/2006

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING

1. DJJ
2. CDW

X Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

1/6/2006

FROM: (Old Operator):
 N2115-Westport Oil & Gas Co., LP
 1368 South 1200 East
 Vernal, UT 84078
 Phone: 1-(435) 781-7024

TO: (New Operator):
 N2995-Kerr-McGee Oil & Gas Onshore, LP
 1368 South 1200 East
 Vernal, UT 84078
 Phone: 1-(435) 781-7024

WELL NAME	CA No.	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
-----------	--------	-----	-----	-----	--------	-----------	------------	-----------	-------------

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 5/10/2006
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 5/10/2006
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- 4a. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- 4b. If **NO**, the operator was contacted on: _____
- 5a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- 5b. Inspections of LA PA state/fee well sites complete on: n/a
- 5c. Reports current for Production/Disposition & Sundries on: ok

6. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 3/27/2006 BIA not yet

7. **Federal and Indian Units:**
 The BLM or BIA has approved the successor of unit operator for wells listed on: 3/27/2006

8. **Federal and Indian Communization Agreements ("CA"):**
 The BLM or BIA has approved the operator for all wells listed within a CA on: n/a

9. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: _____

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 5/15/2006
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 5/15/2006
- Bond information entered in RBDMS on: 5/15/2006
- Fee/State wells attached to bond in RBDMS on: 5/16/2006
- Injection Projects to new operator in RBDMS on: _____
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a Name Change Only

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: CO1203
- Indian well(s) covered by Bond Number: RLB0005239
- (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0005236
- a. The **FORMER** operator has requested a release of liability from their bond on: n/a rider added KMG
 The Division sent response by letter on: _____

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 5/16/2006

COMMENTS:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

Oil Well Gas Well Other

8. Well Name and No.

MUTIPLE WELLS

2. Name of Operator

KERR-McGEE OIL & GAS ONSHORE LP

9. API Well No.

3a. Address

1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7024

10. Field and Pool, or Exploratory Area

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEE ATTACHED

11. County or Parish, State

UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

PLEASE BE ADVISED THAT KERR-McGEE OIL & GAS ONSHORE LP, IS CONSIDERED TO BE THE OPERATOR OF THE ATTACHED WELL LOCATIONS. EFFECTIVE JANUARY 6, 2006.

RECEIVED

KERR-McGEE OIL & GAS ONSHORE LP, IS RESPONSIBLE UNDER TERMS AND CONDITIONS OF THE LEASE(S) FOR THE OPERATIONS CONDUCTED UPON LEASE LANDS. BOND COVERAGE IS PROVIDED BY STATE OF UTAH NATIONWIDE BOND NO. RLB0005237.

MAY 10 2006

DIV. OF OIL, GAS & MINING

*BLM BOND = C01203
BIA BOND = RLB0005239*

APPROVED 5116106

Earlene Russell

**Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician**

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

RANDY BAYNE

Title

DRILLING MANAGER

Signature

Date

May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State
UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
WESTPORT OIL & GAS COMPANY L.P.

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEE ATTACHED

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

EFFECTIVE JANUARY 6, 2006, WESTPORT OIL & GAS COMPANY L.P., HAS RELINQUISHED THE OPERATORSHIP OF THE ATTACHED WELL LOCATIONS TO KERR-McGEE OIL & GAS ONSHORE LP.

APPROVED 5/16/06
Earlene Russell
 Division of Oil, Gas and Mining
 Earlene Russell, Engineering Technician

RECEIVED
 MAY 10 2006

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) BRAD LANEY	Title ENGINEERING SPECIALIST
Signature	Date May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by <i>Brad Laney</i>	Title	Date 5-9-06
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office

Title 18 U.S.C. Section 1001, make it a crime knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT
Colorado State Office
2850 Youngfield Street
Lakewood, Colorado 80215-7076

IN REPLY REFER TO:

CO922 (MM)
3106
COC017387 et. al.

March 23, 2006

NOTICE

Kerr-McGee Oil & Gas Onshore L.P. :
1999 Broadway, Suite 3700 : Oil & Gas
Denver, CO 80202 :

Merger/Name Change - Recognized

On February 28, 2006 this office received acceptable evidence of the following mergers and name conversion:

Kerr-McGee Oil & Gas Onshore L.P., a Delaware Limited Partnership, and Kerr-McGee Oil & Gas Onshore LLC, a Delaware Limited Partnership merger with and into Westport Oil and Gas Company L.P., a Delaware Limited Partnership, and subsequent Westport Oil & Gas Company L.P. name conversion to Kerr-McGee Oil & Gas Onshore L.P.

For our purposes the merger and name conversion was effective January 4, 2006, the date the Secretary of State of Delaware authenticated the mergers and name conversion.

Kerr-McGee Oil & Gas Onshore L.P. provided a list of oil and gas leases held by the merging parties with the request that the Bureau of Land Management change all their lease records from the named entities to the new entity, Kerr-McGee Oil & Gas Onshore L.P. In response to this request each state is asked to retrieve their own list of leases in the names of these entities from the Bureau of Land Management's (BLM) automated LR2000 data base.

The oil and gas lease files identified on the list provided by Kerr-McGee Oil & Gas Onshore L.P. have been updated as to the merger and name conversion. We have not abstracted the lease files to determine if the entities affected by the acceptance of these documents holds an interest in the lease, nor have we attempt to identify leases where the entity is the operator on the ground that maintains vested record title or operating rights interests. If additional documentation, for change of operator, is required you will be contacted directly by the appropriate Field Office. The Mineral Management Services (MMS) and other applicable BLM offices were notified of the merger with a copy of this notice

Please contact this office if you identify additional leases where the merging party maintains an interest, under our jurisdiction, and we will document the case files with a copy of this notice. If the leases are under the jurisdiction of another State Office that information will be forwarded to them for their action.

Three riders accompanied the merger/name conversion documents which will add Kerr-McGee Oil and Gas Onshore LLC as a principal to the 3 Kerr-McGee bonds maintained by the Wyoming State Office. These riders will be forward to them for their acceptance.

The Nationwide Oil & Gas Continental Casualty Company Bond #158626364 (BLM Bond #CO1203), maintained by the Colorado State Office, will remain in full force and effect until an assumption rider is accepted by the Wyoming State Office that conditions their Nationwide Safeco bond to accept all outstanding liability on the oil and gas leases attached to the Colorado bond.

If you have questions about this action you may call me at 303.239.3768.

/s/Martha L. Maxwell
Martha L. Maxwell
Land Law Examiner
Fluid Minerals Adjudication

Attachment:

List of OG Leases to each of the following offices:

MMS MRM, MS 357B-1

WY, UT, NM/OK/TX, MT/ND, WY State Offices

CO Field Offices

Wyoming State Office

Rider #1 to Bond WY2357

Rider #2 to Bond WY1865

Rider #3 to Bond WY1127



United States Department of the Interior



BUREAU OF LAND MANAGEMENT
Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155
<http://www.blm.gov>

IN REPLY REFER TO:
3106
(UT-922)

March 27, 2006

Memorandum

To: Vernal Field Office

From: Chief, Branch of Fluid Minerals

Subject: Merger Approval

Attached is an approved copy of the merger recognized by the Bureau of Land Management, Colorado State Office. We have updated our records to reflect the merger from Westport Oil and Gas Company L.P. into Kerr-McGee Onshore Oil and Gas Company. The merger was approved effective January 4, 2006.

Chief, Branch of
Fluid Minerals

Enclosure

Approval letter from BLM COSO (2 pp)

cc: MMS, Reference Data Branch, James Sykes, PO Box 25165, Denver CO 80225
State of Utah, DOGM, Attn: Earlene Russell, PO Box 145801, SLC UT 84114
Teresa Thompson
Joe Incardine
Connie Seare
Dave Mascarenas
Susan Bauman

RECEIVED

MAR 28 2006

U.S. DEPT. OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: KERR MCGEE OIL & GAS ONSHORE LP Operator Account Number: N 2995
 Address: 1368 SOUTH 1200 EAST
city VERNAL
state UT zip 84078 Phone Number: (435) 781-7024

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
Various	NBU REVISION						UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
E	Various	2900	3/13/2012			2/1/2012	
Comments: MOVE THE ATTACHED WELLS INTO THE NATURAL BUTTES UNIT REVISION EFFECTIVE 02/01/2012. <i>72 wells</i> 5/31/2012							

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
Comments:							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
Comments:							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

SHEILA WOPSOCK

Name (Please Print)

Signature

REGULATORY ANALYST

Title

5/30/2012

Date

RECEIVED

MAY 31 2012

Div. of Oil, Gas & Mining

Entity Action Form Attachment for wells moved into the Natural Buttes Unit Effective 02/01/2012.

API	Well Name	QTR/QTR / Section	TWNSHP	RANGE	Producing Intervals
4304737079	FEDERAL 920-25I	NESE <i>orig entity</i> 15431	25 9S	20E	WASATCH/MESAVERDE
4304737080	FEDERAL 920-25H	SENE 15761	25 9S	20E	WASATCH/MESAVERDE
4304737081	FEDERAL 920-25A	NENE 15553	25 9S	20E	WASATCH/MESAVERDE from MURD
4304739098	STATE 1021-28M	SWSW 16499	28 10S	21E	WASATCH To WSMVD
4304737918	FEDERAL 1021-26L	NWSW 16390	26 10S	21E	MESAVERDE To WSMVD
4304737919	FEDERAL 1021-26N	SESW 16391	26 10S	21E	WASATCH/MESAVERDE
4304737916	FEDERAL 1021-25O	SWSE 16277	25 10S	21E	WASATCH/MESAVERDE
4304739112	STATE 1021-31M	SWSW 16454	31 10S	21E	WASATCH To WSMVD
4304739127	STATE 1021-32P	SESE 16471	32 10S	21E	WASATCH/MESAVERDE
4304739128	STATE 1021-32O	SWSE 17513	32 10S	21E	WASATCH/MESAVERDE
4304739131	STATE 1021-32L	NWSW 16902	32 10S	21E	WASATCH/MESAVERDE
4304739133	STATE 1021-32J	NWSE 17529	32 10S	21E	WASATCH/MESAVERDE
4304739134	STATE 1021-32I	NESE 16905	32 10S	21E	WSMVD
4304739135	STATE 1021-32H	SENE 17528	32 10S	21E	WASATCH/MESAVERDE
4304735714	FEDERAL 1022-29H	SENE 15147	29 10S	22E	WASATCH/MESAVERDE
4304735715	FEDERAL 1022-29F	SENW 15162	29 10S	22E	WASATCH/MESAVERDE
4304735716	FEDERAL 1022-29B	NWNE 11492	29 10S	22E	WASATCH/MESAVERDE
4304735737	FEDERAL 1022-29I	NESE 15001	29 10S	22E	WASATCH/MESAVERDE
4304735738	FEDERAL 1022-29D	NWNW 15016	29 10S	22E	MESAVERDE To WSMVD
4304734862	FEDERAL 31-10-22	SESE 13879	31 10S	22E	MESAVERDE To WSMVD
4304735173	FEDERAL 1022-31D	NWNW 14132	31 10S	22E	WASATCH/MESAVERDE
4304736492	FEDERAL 1022-31N	SESW 16255	31 10S	22E	WASATCH/MESAVERDE
4304736493	FEDERAL 1022-31I	NESE 15089	31 10S	22E	WASATCH/MESAVERDE
4304736494	FEDERAL 1022-31G	SWNE 15075	31 10S	22E	WASATCH/MESAVERDE
4304736495	FEDERAL 1022-31F	SENE 15230	31 10S	22E	WASATCH/MESAVERDE
4304736574	FEDERAL 1022-31C	NENW 15090	31 10S	22E	WASATCH/MESAVERDE
4304736575	FEDERAL 1022-31J	NWSE 15214	31 10S	22E	WASATCH/MESAVERDE
4304736576	FEDERAL 1022-31L	NWSW 16276	31 10S	22E	WASATCH/MESAVERDE
4304734317	STATE 1-32	NESW 13419	32 10S	22E	WASATCH/MESAVERDE
4304734831	STATE 2-32	SESW 13842	32 10S	22E	MESAVERDE To WSMVD
4304734832	STATE 3-32	NWSW 13844	32 10S	22E	WASATCH/MESAVERDE
4304735095	STATE 1022-32J	NWSE 114097	32 10S	22E	WSMVD
4304735096	STATE 1022-32A	NENE 13914	32 10S	22E	WASATCH/MESAVERDE
4304735186	STATE 1022-32P	SESE 14131	32 10S	22E	MESAVERDE To WSMVD
4304735315	STATE 1022-32O	SWSE 14114	32 10S	22E	WASATCH/MESAVERDE
4304735647	STATE 1022-32H	SENE 14348	32 10S	22E	MESAVERDE To WSMVD
4304736413	STATE 1021-36O	SWSE 15619	36 10S	21E	WASATCH/MESAVERDE
*4304738157	WELL BELONGS TO QEP ENERGY CORP "GH 8-20-8-21" PERMIT NOT APPROVED				
4304734839	FEDERAL 1022-15F	SENW 14618	15 10S	22E	WASATCH/MESAVERDE
4304736414	STATE 1021-36J	NWSE 15651	36 10S	21E	WASATCH/MESAVERDE
4304738152	STATE 1021-36L	NWSW 16012	36 10S	21E	WASATCH/MESAVERDE
4304735440	FEDERAL 1022-15J	NWSE 14617	15 10S	22E	WASATCH/MESAVERDE
4304736415	STATE 1021-36I	NESE 15684	36 10S	21E	WASATCH/MESAVERDE
4304738845	STATE 1021-36D	NWNW 16455	36 10S	21E	WASATCH/MESAVERDE

4304750096	FEDERAL 1022-27H	SENE	17626	27 10S	22E	WASATCH/MESAVERDE	
4304736416	STATE 1021-36H	SENE	15335	36 10S	21E	WASATCH/MESAVERDE	
4304738846	STATE 1021-36E	SWNW	16523	36 10S	21E	WASATCH/MESAVERDE	
4304735676	FEDERAL 1022-28L	NWSW	15110	28 10S	22E	WASATCH/MESAVERDE	
4304736417	STATE 1021-36G	SWNE	15297	36 10S	21E	WASATCH/MESAVERDE	
4304738847	STATE 1021-36F	SENE	16394	36 10S	21E	WASATCH/MESAVERDE	
4304735713	FEDERAL 1022-28N	SESW	15145	28 10S	22E	WASATCH/MESAVERDE	
4304736418	STATE 1021-36B	NWNE	14953	36 10S	21E	WASATCH/MESAVERDE	
4304738848	STATE 1021-36N	SESW	16359	36 10S	21E	WASATCH/MESAVERDE	
4304735735	FEDERAL 1022-28O	SWSE	15285	28 10S	22E	WASATCH/MESAVERDE	from MURD
4304736419	STATE 1021-36A	NENE	15035	36 10S	21E	WASATCH/MESAVERDE	
4304738849	STATE 1021-36K	NESW	16084	36 10S	21E	WASATCH/MESAVERDE	
4304735736	FEDERAL 1022-28M	SWSW	15286	28 10S	22E	WASATCH/MESAVERDE	
4304736420	STATE 1021-36P	SESE	15372	36 10S	21E	WASATCH/MESAVERDE	
4304738850	STATE 1021-36C	NENW	16396	36 10S	21E	WASATCH/MESAVERDE	
4304734861	FEDERAL 29-10-22	SESE	14006	29 10S	22E	MESAVERDE	TO WSMVD
4304735577	FEDERAL 1022-33O	SWSE	15080	33 10S	22E	WASATCH/MESAVERDE	
4304735739	FEDERAL 1022-33E	SWNW	15193	33 10S	22E	WASATCH/MESAVERDE	
4304735740	FEDERAL 1022-33M	SWSW	15373	33 10S	22E	WASATCH/MESAVERDE	
4304735741	FEDERAL 1022-33L	NWSW	15511	33 10S	22E	WASATCH/MESAVERDE	
4304735742	FEDERAL 1022-33G	SWNE	15404	33 10S	22E	WASATCH/MESAVERDE	from MURD
4304735743	FEDERAL 1022-33C	NENW	15405	33 10S	22E	WASATCH/MESAVERDE	
4304735744	FEDERAL 1022-33A	NENE	15539	33 10S	22E	WASATCH/MESAVERDE	
4304737105	FEDERAL 1022-33D	NWNW	16502	33 10S	22E	WASATCH/MESAVERDE	
4304737106	FEDERAL 1022-33F	SENE	16560	33 10S	22E	WASATCH/MESAVERDE	from WSTC
4304737107	FEDERAL 1022-33K	NESW	16124	33 10S	22E	WASATCH/MESAVERDE	
4304737109	FEDERAL 1022-33N	SESW	16126	33 10S	22E	WASATCH/MESAVERDE	
4304737110	FEDERAL 1022-33B	NWNE	16561	33 10S	22E	WASATCH/MESAVERDE	
4304735810	STATE 1021-36E	SWNW	14295	36 10S	21E	WASATCH/MESAVERDE	