

EOG Resources, Inc.
P.O. 1910
Vernal, UT 84078

May 19, 2005

Utah Division of Oil, Gas, & Mining
1594 West North Temple, Suite 1210
P.O. Box 145801
Salt Lake City, UT 84114-5801

RE: APPLICATION FOR PERMIT TO DRILL
WILD HORSE FEDERAL 118-35
SW/NE, SEC. 35, T10S, R19E
UINTAH COUNTY, UTAH
LEASE NO.: U-3405
FEDERAL LANDS


RECEIVED
MAY 23 2005

Enclosed please find a copy of the Application for Permit to Drill and associated ^{DIV. OF OIL, GAS & MINING} attachments for the referenced well.

Please address further communication regarding this matter (including approval) to:

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Phone: (435)789-4120
Fax: (435)789-1420

Sincerely,

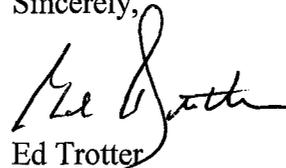

Ed Trotter
Agent
EOG Resources, Inc.

Attachments

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires March 31, 2007

001 APPLICATION FOR PERMIT TO DRILL OR REENTER

5. Lease Serial No.
U-3405

6. If Indian, Allottee or Tribe Name

1a. Type of Work: DRILL REENTER

1b. Type of Well: Oil Well Gas Well Other Single Zone Multiple Zone

7. If Unit or CA Agreement, Name and No.

8. Lease Name and Well No.
Wild Horse Federal 118-35

2. Name of Operator
EOG RESOURCES, INC.

9. API Well No.
43-047-36750

3a. Address **P.O. BOX 1815
VERNAL, UT 84078**

3b. Phone No. (Include area code)
(435)789-0790

10. Field and Pool, or Exploratory
NATURAL BUTTES

4. Location of Well (Report location clearly and in accordance with any State requirements.)*

At surface **1800' FNL, 2164' FEL 607105 X 39.905912 SW/NE**

At proposed prod. Zone **441 7856y -109.747015**

11. Sec., T., R., M., or Blk. and Survey or Area
**SEC. 35, T10S, R19E,
S.L.B.&M.**

14. Distance in miles and direction from nearest town or post office*

23.7 MILES SOUTHWEST OF OURAY, UTAH

12. County or Parish **UINTAH** 13. State **UTAH**

15. Distance from proposed* location to nearest property or lease line, ft. **1800'**
(Also to nearest drig. Unit line, if any)

16. No. of Acres in lease
1600

17. Spacing Unit dedicated to this well
40

**RECEIVED
MAY 23 2005**

18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. See Topo Map C

19. Proposed Depth
8150'

20. BLM/BIA Bond No. on file
NM-2308 DIV. OF OIL, GAS & MINING

21. Elevations (Show whether DF, KDB, RT, GL, etc.)
5349.0 FEET GRADED GROUND

22. Approximate date work will start*
UPON APPROVAL

23. Estimated duration
45 DAYS

24. Attachments

Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification.
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature

[Signature]
Agent

Name (Printed/Typed)
Ed Trotter

Date
May 19, 2005

Approved by (Signature)

[Signature]
Title

Name (Printed/Typed)
**BRADLEY G. HILL
ENVIRONMENTAL SCIENTIST III**

Date
05-26-05

Office


Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of Approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)

**Federal Approval of this
Action is Necessary**

T10S, R19E, S.L.B.&M.

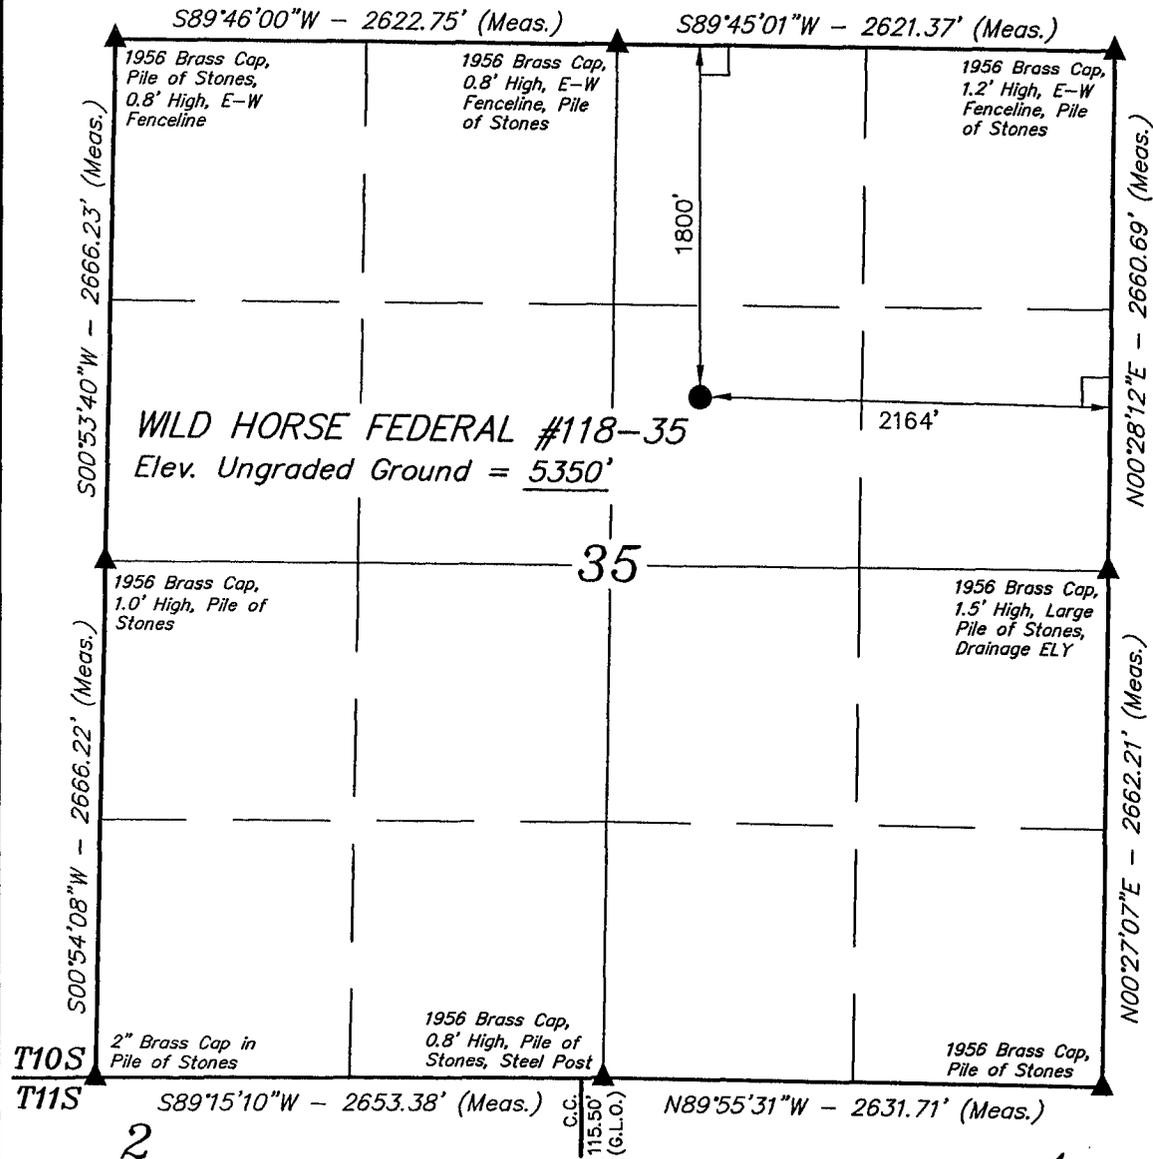

LEGEND:

- = 90° SYMBOL
- = PROPOSED WELL HEAD.
- = SECTION CORNERS LOCATED.

(NAD 83)
 LATITUDE = 39°54'21.39" (39.905942)
 LONGITUDE = 109°44'51.92" (109.747756)
 (NAD 27)
 LATITUDE = 39°54'21.52" (39.905978)
 LONGITUDE = 109°44'49.42" (109.747061)

EOG RESOURCES, INC.


Well location, WILD HORSE FEDERAL #118-35, located as shown in the SW 1/4 NE 1/4 of Section 35, T10S, R19E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

SPOT ELEVATION AT THE SOUTHWEST CORNER OF SECTION 20, T10S, R20E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN. NW QUADRANGLE, UTAH, UTAH COUNTY 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5251 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

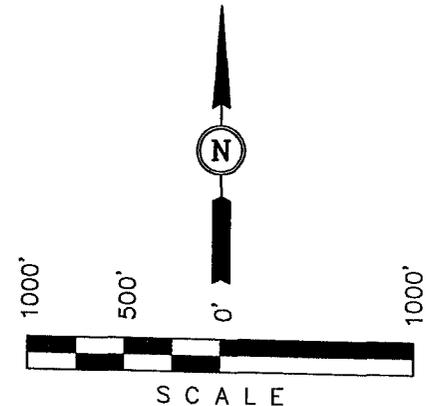

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

John A. Gray
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 161319
 STATE OF UTAH

UINTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 03-21-05	DATE DRAWN: 03-31-05
PARTY G.S. B.C. P.M.	REFERENCES G.L.O. PLAT	
WEATHER COOL	FILE EOG RESOURCES, INC.	

EIGHT POINT PLAN

WILD HORSE FEDERAL 118-35
SW/NE, SEC. 35, T10S, R19E, S.L.B.&M.
UINTAH COUNTY, UTAH

1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:

FORMATION	DEPTH (KB)
Green River	2,361'
Wasatch	4,340'
Chapita Wells	4,953'
Buck Canyon	5,678'
North Horn	6,561'
KMV Price River	7,986'

EST. TD: 8,150'

Anticipated BHP 3500 PSI

3. PRESSURE CONTROL EQUIPMENT:

Intermediate Hole – 3000 PSIG
Production Hole – 3000 PSIG
BOP Schematic Diagrams attached.

4. CASING PROGRAM:

<u>HOLE SIZE</u>	<u>INTERVAL</u>	<u>LENGTH</u>	<u>SIZE</u>	<u>WEIGHT</u>	<u>GRADE</u>	<u>THREAD</u>	<u>RATING FACTOR</u>		
							<u>COLLAPSE</u>	<u>BURST</u>	<u>TENSILE</u>
17 1/2"	0' – 250'	250'	13 3/8"	48.0#	H-40	STC	770 PSI	1730 PSI	322,000#
12 1/4"	250' - 2300' +/- KB	2300' +/-	9 5/8"	36.0 #	J-55	ST&C	2020 PSI	3520 PSI	394,000#
7 7/8"	2300' – TD +/-KB	8,150' +/-	4 1/2"	11.6 #	N-80	LT&C	6350 PSI	7780 PSI	223,000#

Note: The 12 1/4" Intermediate hole will be drilled to a total depth of 200' below the base of the Green River lost circulation zone and 9 5/8" casing will be set to that depth. Actual setting depth of the 9 5/8" casing may be less than 2300' in this well.

All casing will be new or inspected.

5. Float Equipment:

Surface Hole Procedure (0-250' Below GL):

Guide Shoe

Insert Baffle

Wooden wiper plug

Centralizers: 1 – 5-10' above shoe, every collar for next 3 joints (4 total).

Intermediate Hole Procedure (250' - ±2300')

Guide Shoe

Insert Float Collar (PDC drillable)

Cents.: 1-5' above shoe, top of jts. #2 and #3 then every 5th joint to surface. (15 total)

EIGHT POINT PLAN

WILD HORSE FEDERAL 118-35 SW/NE, SEC. 35, T10S, R19E, S.L.B.&M. UINTAH COUNTY, UTAH

Float Equipment (Continued):

Production Hole Procedure ($\pm 2300'$ -TD):

FS, 1 joint of casing, FC, and balance of casing to surface. Run 11.6#, N-80 burst rating or equivalent marker collars or short casing joints at $\pm 7,986'$ (Top of Price River) and $\pm 3,900'$ (400' above the Wasatch) (alter depth if needed to avoid placing across any potentially-productive intervals). Centralize 5' above shoe on joint #1, top of joint #2, then every 2nd joint to 400' above Price River top (± 30 total). Thread lock FS, top and bottom of FC, and top of 2nd joint.

6. MUD PROGRAM

Surface Hole Procedure (0-250' below GL):

Air – Air Water Mist

Intermediate Hole Procedure (250' \pm 2300'):

Water (circulate through reserve pit) with Gel/LCM sweeps.

Production Hole Procedure ($\pm 2300'$ -TD):

± 2300 -7500' Use water (circulated through reserve pit) with PHPA polymer sweeps on a regular basis. Adjust frequency of sweeps based on cuttings quality and hole conditions. Gel/LCM sweeps can also be used for additional cleaning and for reducing seepage, but should not be "substituted" for the PHPA sweeps.

While on water, spot either salt water or pre-mixed weighted mud as required to prevent flow during trips after gas influxes have been encountered. Watch cuttings size, shape and quantity to determine if increase in mud weight is required. Increased mud weight is often the key to shale stability in this area. Treat for any CO₂ contamination with Lime and Gyp.

7500'- TD' Close mud system in. "Mud up" with Hi-Yield bentonite for primary viscosity and PHPA polymer for supplemental viscosity and clay encapsulation/inhibition. Utilize white Starch or PAC for filtration control. Treat with bactericide if required. Maintain pH in 9.0-10.0 range.

Expect increasing gas influxes requiring heavier mud weights as drilling progresses. Adjust mud weight as needed. Use deflocculants/thinners if required to maintain good flow properties.

Run LCM sweeps periodically to seal-off loss zones. Adjust sweep frequency based on observed losses. Maintain water loss 15 cc's or less. Treat CO₂ contamination with Lime and/or Gypsum.

EIGHT POINT PLAN

WILD HORSE FEDERAL 118-35
SW/NE, SEC. 35, T10S, R19E, S.L.B.&M.
UINTAH COUNTY, UTAH

7. VARIANCE REQUESTS:

- A. EOG Resources, Inc. requests a variance to regulations requiring a straight run blooie line (Where possible, a straight run blooie line will be used).
- B. EOG Resources, Inc. requests a variance to regulations requiring an automatic igniter or continuous pilot light on the blooie line. (Not required on aerated water system).
- C. EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. To reduce location excavation, the blooie line will be 75' in length.

8. EVALUATION PROGRAM:

**Logs: No Open Hole Logs
Cased Hole Logs.**

9. CEMENT PROGRAM:

Surface Hole Procedure (0-250' Below GL)

Lead: 300 sks (100% excess volume) Class 'G' cement with 2% S1 (CaCl₂) & 0.25 pps D29 (cellophane flakes), mixed at 15.8 ppg, 1.16 ft³/sk., 4.95 gps water.

Top Out: Top out with Class 'G' cement with 2% S1 (CaCl₂) in mix water, 15.8 ppg, 1.16 ft³/sk., 4.95 gps via 1" tubing set at 25' if needed.

Intermediate Hole Procedure (250'± 2300'):

Option #1

Lead: 85 sks: (50% excess volume) Class 'G' lead cement (coverage from 1700-1000') with 5% D44 (Salt), 12% D20 (Bentonite), 1% D79% (Extender), 0.25% D112 (Fluid Loss Additive), 0.2% D46 (Anti-Foamer) & 0.25 pps D29 (Cellophane flakes) mixed at 11.0 ppg, 3.91 ft³/sk., 24.5 gps water.

Tail: 290 sks: (50% excess volume) Class 'G' cement (coverage from 2700-1700') with 10% D53 (Gypsum), 2% S1 (CaCl₂) & 0.25 pps D29 (Cellophane flakes) mixed at 14.2 ppg, 1.61 ft³/sk., 7.9 gps water.

Option 2:

Lead: 210 sks: (60% excess volume) Class 'G' lead cement (coverage from 2300-1800') with 2% BWOC (Calcium Chloride), ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft³/sk., 5.2 gps water.

Tail: 720 sks: (60% excess volume) Class 'G' cement (coverage from 1800'-Surface) with 2% BWOC (Calcium Chloride), ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft³/sk., 5.2 gps water.

EIGHT POINT PLAN

WILD HORSE FEDERAL 118-35
SW/NE, SEC. 35, T10S, R19E, S.L.B.&M.
UINTAH COUNTY, UTAH

CEMENT PROGRAM (Continued):

Production Hole Procedure (\pm 2300' to TD)

Lead: 110 sks 35:65 Poz G w/ 4% D20 (Bentonite), 2% D174 (Extender), 0.2% D65 (Dispersant), 0.2% D46 (Antifoam), 0.75% D112 (Fluid Loss Additive), 0.15% D13 (Retarder), 0.25 pps D29 (cello flakes), mixed at 13.0 ppg, 1.73 ft³/sk., 9.06 gps water

Tail: 190 sks: 50:50 Poz G w/ 2% D20 (Bentonite), 0.1% D46 (Antifoam), 0.15% D13 (Retarder), 0.2% D167 (Fluid Loss Additive), 0.2% D65 (Dispersant), mixed at 14.1 ppg, 1.28 ft³/sk., 5.9 gps water.

10. ABNORMAL CONDITIONS:

Intermediate Hole (250'- \pm 2300'):

Lost circulation

Production Hole (\pm 2300'-TD):

Sloughing shales and key seat development are possible in the Wasatch Formation.

11. STANDARD REQUIRED EQUIPMENT:

- A. Choke Manifold
- B. Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

12. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.


(Attachment: BOP Schematic Diagram)

3000 PSIG DIAGRAM

ANNULAR PREVENTOR AND BOTH RAMS ARE 3000 PSIG RATED.
 CASING FLANGE IS 11" 3000 PSIG RATED.
 BOPE 11" 3000 PSIG

TESTING PROCEDURE:

1. BOPE's will be tested with a professional tester to conform to Onshore Order #2 with retest every 14 days.
2. Blind & Pipe rams will be tested to rated working pressure, 3000 psig.
3. Annular preventor will be tested to 50% of working pressure, 1500 psig.
4. Casing will be tested to 0.22 psi/ft. or 1500 psig. Not to exceed 70% of burst strength, whichever is greater.
5. All lines subject to well pressure will be pressure-tested to the same pressure as blind & pipe rams.
6. All BOPE specifications and configurations will meet Onshore Order #2 requirements for 3000 psig BOPE specifications.

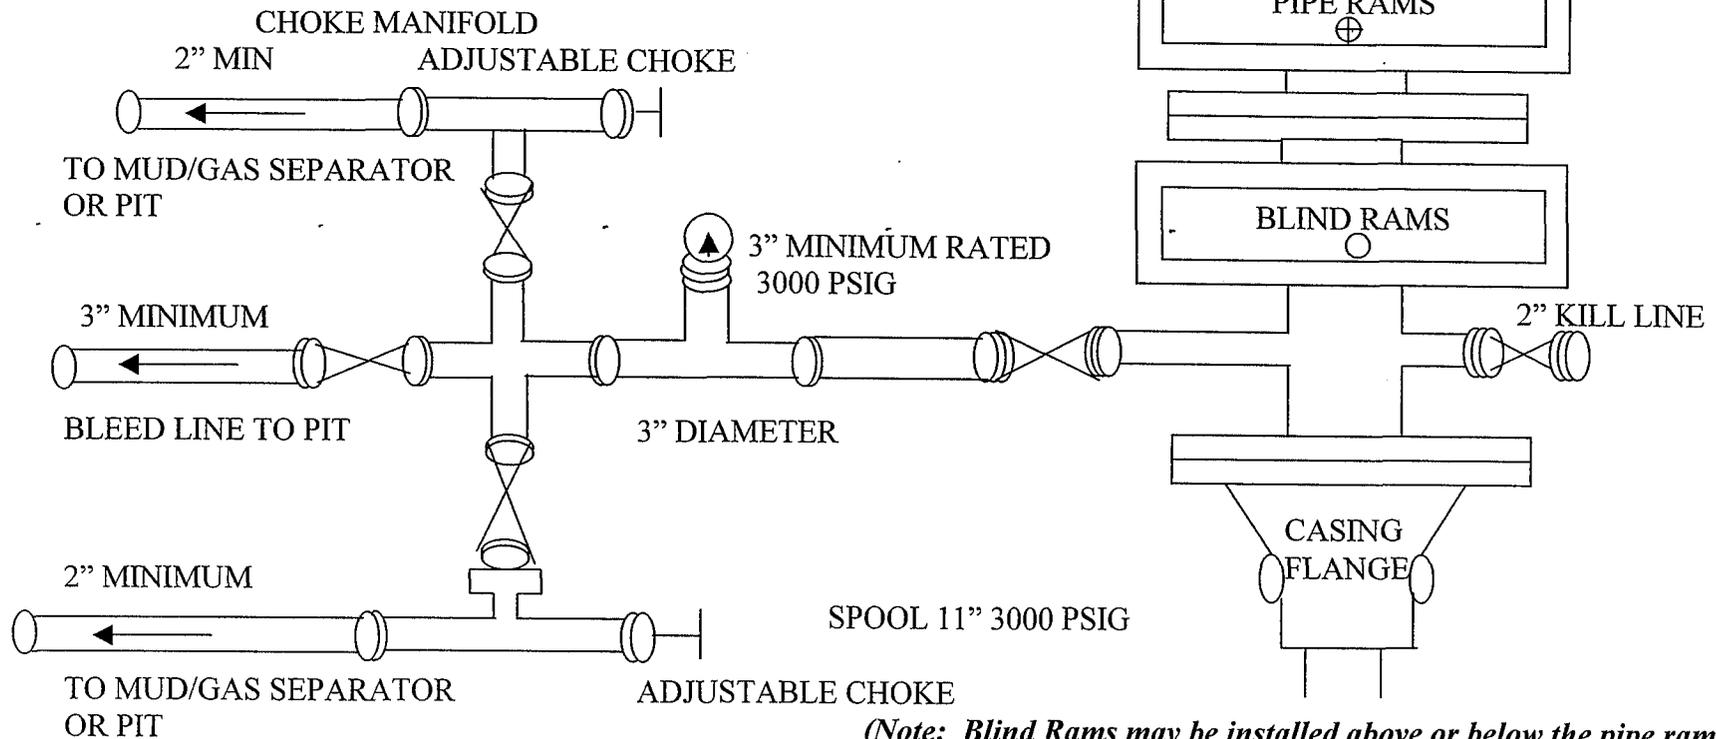

(Note: Blind Rams may be installed above or below the pipe rams)

**CONDITIONS OF APPROVAL
FOR THE SURFACE USE PROGRAM OF THE
APPLICATION FOR PERMIT TO DRILL**

Company/Operator: EOG Resources, Inc.
Well Name & Number: Wild Horse Federal 118-35
Lease Number: U-3405
Location: 1800' FNL & 2164' FEL, SW/NE, Sec. 35,
T10S, R19E, S.L.B.&M., Uintah County, Utah
Surface Ownership: Federal

NOTIFICATION REQUIREMENTS

Location Construction - forty-eight (48) hours prior to construction of location and access roads.

Location Completion - prior to moving on the drilling rig.

Spud Notice: - at least twenty-four (24) hours prior to spudding the well.

Casing String and Cementing - twenty-four (24) hours prior to running casing and cementing all casing strings.

BOP and related Equipment Tests - twenty-four (24) hours prior to running casing and tests.

First Production Notice - within five (5) business days after new Well begins or production resumes after Well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

THIRTEEN POINT SURFACE USE PROGRAM

1. EXISTING ROADS

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 23.7 miles southwest of Ouray, Utah - See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

2. PLANNED ACCESS ROAD

- A. The access road will be approximately 0.3 miles in length. See attached TOPO Map "B".
- B. The access road has a 30 foot ROW w/ 18 foot running surface.
- C. Maximum grade on access road will be 8%.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No culverts, bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of-Way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by run off water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, EOG Resources, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

3. **LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION**

- A. Abandoned wells - 2*
- B. Producing wells - 16*
- C. Shut in wells - 2*

(*See attached TOPO map "C" for location)

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

A. **ON WELL PAD**

- 1. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of wellhead valves, combo separator-dehy unit with meter, 300 Bbl vertical or 200 Bbl low profile, condensate tank, and attaching piping.
- 2. Gas gathering lines - A 4" gathering line will be buried from dehy to the edge of the location.

B. **OFF WELL PAD**

- 1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
- 2. A 4" OD steel above ground natural gas pipeline will be laid approximately 2034' from proposed location to a point in the NE/SW of Section 35, T10S, R19E, where it will tie into Questar Pipeline Co.'s existing line. Proposed pipeline crosses Federal lands, thus a Right-of-Way grant will be required.
- 3. Proposed pipeline will be a 4" OD steel, welded line laid on the surface.
- 4. Protective measures and devices for livestock and wildlife will be taken and/or installed where required.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery.

The production facilities will be placed on the North side of the location.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within 6 months of installation. Facilities

required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

The required paint color is Carlsbad Canyon.

If at any time the facilities located on public land and authorized by the terms of the lease are no longer included in the lease (due to a contraction in the unit or other lease or unit boundary change), BLM will process a change in authorization to the appropriate statute. The authorization will be subject to appropriate rental or other financial obligation as determined by the authorized officer.

5. **LOCATION & TYPE OF WATER SUPPLY**

- A. Water supply will be from Ouray Municipal Water Plant at Ouray, Utah, and/or Target Trucking Inc.'s water source in the SW/SW, Sec. 35, T9S, R22E, Uintah County, Utah (State Water Right #49-1501). Produced water from the Chapita Wells and Stagecoach Units will also be used.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. **SOURCE OF CONSTRUCTION MATERIAL**

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of the location.
- B. All construction material will come from Federal Land.
- C. No mineral materials will be required.

7. **METHODS OF HANDLING WASTE DISPOSAL**

A. METHODS AND LOCATION

- 1. Cuttings will be confined in the reserve pit.
- 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
- 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah County Landfill.
- 4. Produced wastewater will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. After the 90 day period, the produced water will be contained in a tank on location and then disposed of at one of the following three locations: Natural Buttes Unit 21-20B SWD, Ace Disposal, or EOG Resources, Inc. drilling operations (Chapita Wells Unit, Natural Buttes Unit & Stagecoach Unit).

5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.
- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit or be removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

On BLM administered land:

The reserve pit will be constructed so as not to leak, break, or allow discharge. If the reserve pit requires padding prior to lining (due to rocky conditions) felt padding will be used.

The reserve pit shall be lined with felt and a 12 millimeter plastic liner.

8. **ANCILLARY FACILITIES**

- A. No airstrips or camps are planned for this well.

9. **WELLSITE LAYOUT**

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The approved seed mixture for this location is:

Gardner Saltbush/Fourwing – 3 pounds per acre
Shadscale – 3 pounds per acre
Indian Rice Grass - 2 pounds per acre
Hi-Crest Crested Wheat Grass – 1 pound per acre

The reserve pit will be located on the Northeast corner of the location. The flare pit will be located downwind of the prevailing wind direction on the East side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled pit topsoil will be stored separate from the location topsoil South of Corners B and 5. The stockpiled location topsoil will be stored from Northwest of Corner #2 to Corner #8. Upon completion of construction, the stockpiled topsoil from the location will be broadcast seeded with the approved seed mixture for this location and then walked down with a Caterpillar tractor.

Access to the well pad will be from the South.

Corners #2 & #6 will be rounded off to minimize excavation.

FENCING REQUIREMENTS:

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BLM or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is to be regularly traveled. If the well is a producer, the cattleguards (shall/shall not) be permanently mounted on concrete bases. Prior to crossing any fence located on Federal land, or any fence between Federal land and private land, the operator will contact the BLM, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

10. PLANS FOR RESTORATION OF SURFACE

A. PRODUCING LOCATION

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The stockpiled pit topsoil will then be spread over the pit area and broadcast seeded with the prescribed seed mixture for this location. The seeded area will then be walked down with a cat.

B. DRY HOLE/ABANDONED LOCATION

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BLM will attach the appropriate surface rehabilitation conditions of approval.

11. SURFACE OWNERSHIP

Access road: Federal

Location: Federal

12. OTHER INFORMATION

A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to:

- whether the materials appear eligible for the National Register of Historic Places;
- the mitigation measures the operator will likely have to undertake before the site can be used.
- a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification

from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

- B. As operator, EOG Resources, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BLM, or the appropriate County Extension Office. On BLM administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.

- C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on BLM lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

Additional Surface Stipulations

X No construction of access road or location shall be conducted during wet weather due to critical soils stipulations.

LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION

PERMITTING AGENT

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Telephone: (435)789-4120
Fax: (435)789-1420

DRILLING OPERATIONS

Donald Presenkowski
EOG Resources, Inc.
P.O. Box 250
Big Piney, WY 83113
Telephone: (307)276-4865

All lease or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. EOG Resources, Inc. is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.

Certification


I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions that presently exist; that the statements made in the Plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by EOG Resources, Inc. and its contractors and subcontractors in conformity with this Plan and the terms and conditions under which it is approved.

Please be advised that EOG Resources, Inc. is considered to be the operator of the **Wild Horse Federal 118-35 Well, located in the SW/NE of Section 35, T10S, R19E, Uintah County, Utah; Lease #U-3405**; and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond Coverage is provided under Bond #NM 2308.

5-19-2005

Date

Agent

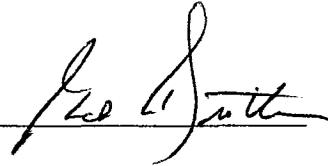

EOG RESOURCES, INC.
WILD HORSE FEDERAL #118-35
SECTION 35, T10S, R19E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 9.1 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 2.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE WEST; TURN RIGHT AND PROCEED IN A WESTERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 0.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTH; TURN RIGHT AND PROCEED IN A NORTHERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 2.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; PROCEED IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 2.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHWEST; TURN RIGHT AND PROCEED IN A NORTHWESTERLY DIRECTION APPROXIMATELY 2.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN LEFT AND PROCEED IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 0.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN LEFT AND PROCEED IN A SOUTHERLY, THEN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 0.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN RIGHT AND PROCEED IN A SOUTHWESTERLY, THEN SOUTHERLY DIRECTION APPROXIMATELY 0.6 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN LEFT AND PROCEED IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 0.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.1 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE EAST; FOLLOW ROAD FLAGS IN AN EASTERLY, THEN NORTHEASTERLY DIRECTION APPROXIMATELY 0.3 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 54.7 MILES.

EOG RESOURCES, INC.
WILD HORSE FEDERAL #118-35
 LOCATED IN UTAH COUNTY, UTAH
 SECTION 35, T10S, R19E, S.L.B.&M.

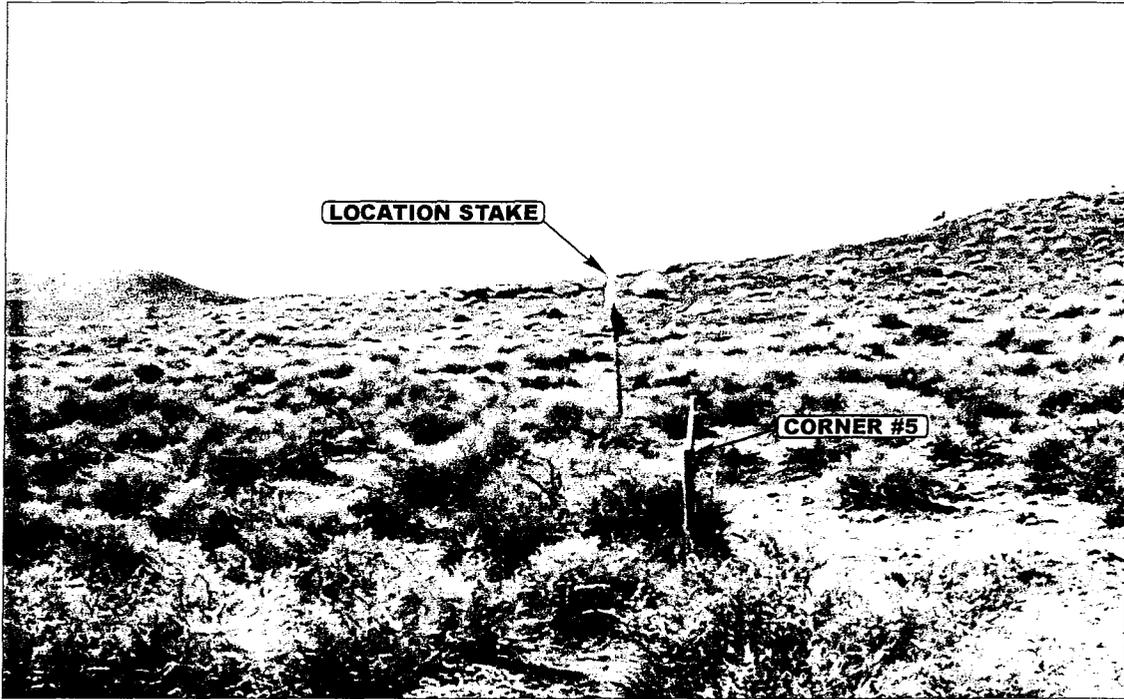


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: SOUTHWESTERLY

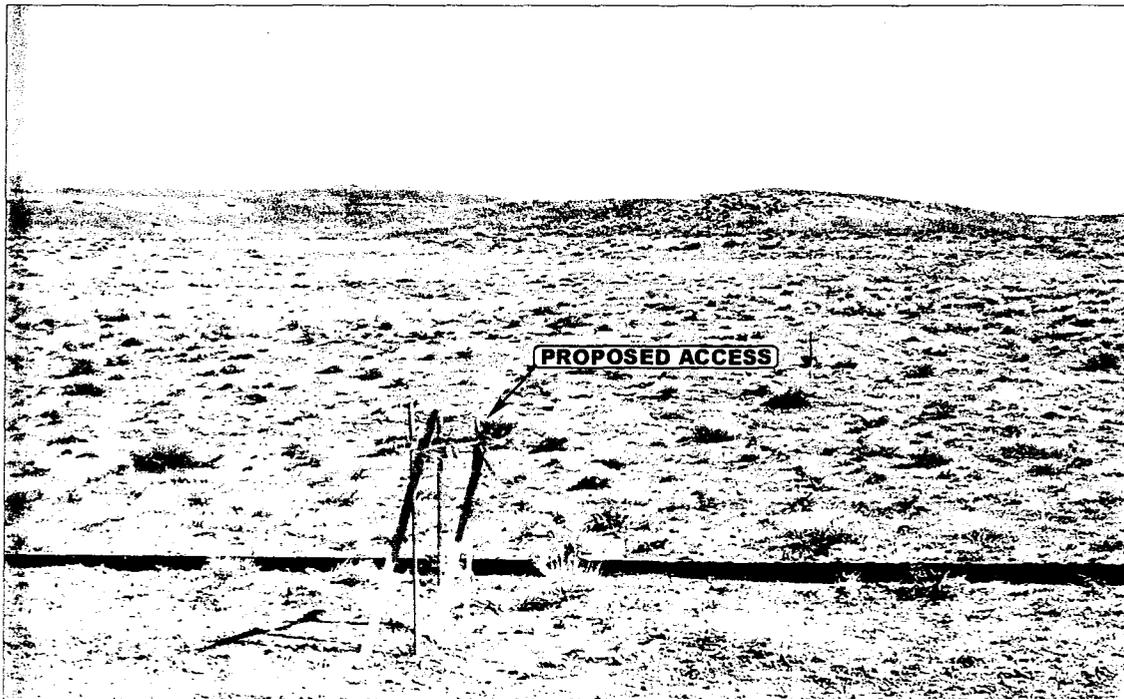


PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: EASTERLY



- Since 1964 -


E&L S Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 435-789-1017 uels@uelsinc.com

LOCATION PHOTOS	03	23	05	PHOTO
	MONTH	DAY	YEAR	
TAKEN BY: G.S.	DRAWN BY: L.K.	REVISED: 00-00-00		






EOG RESOURCES, INC.

FIGURE #2

TYPICAL CROSS SECTIONS FOR
WILD HORSE FEDERAL #118-35
SECTION 35, T10S, R19E, S.L.B.&M.
1800' FNL 2164' FEL



DATE: 03-31-05
Drawn By: P.M.

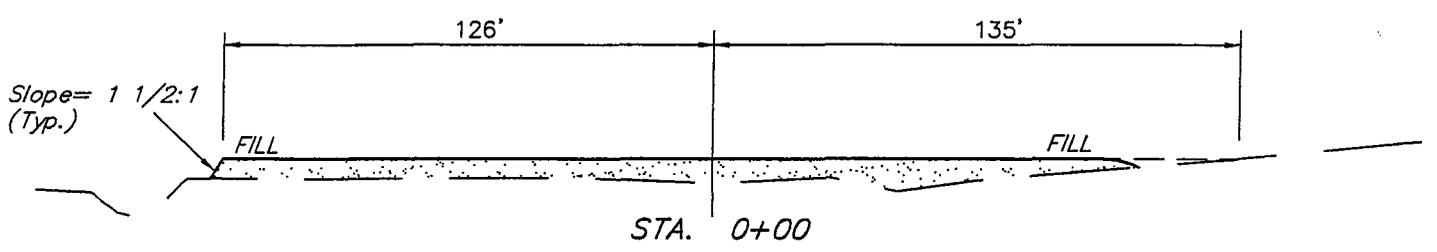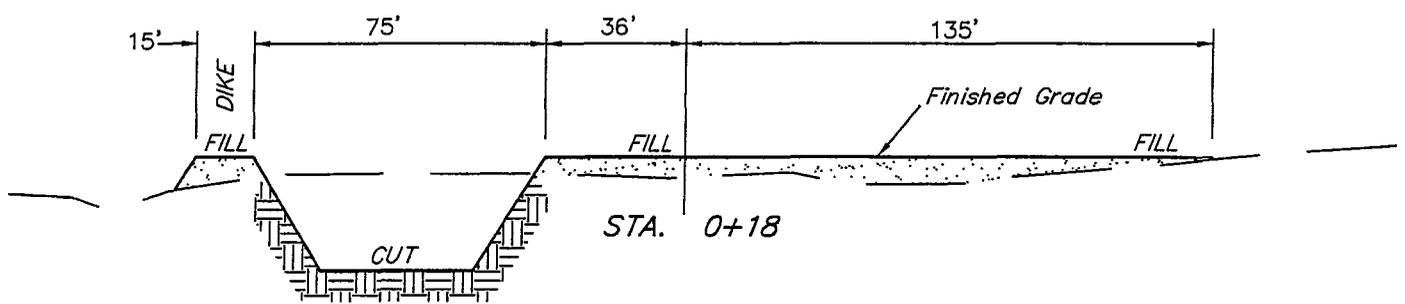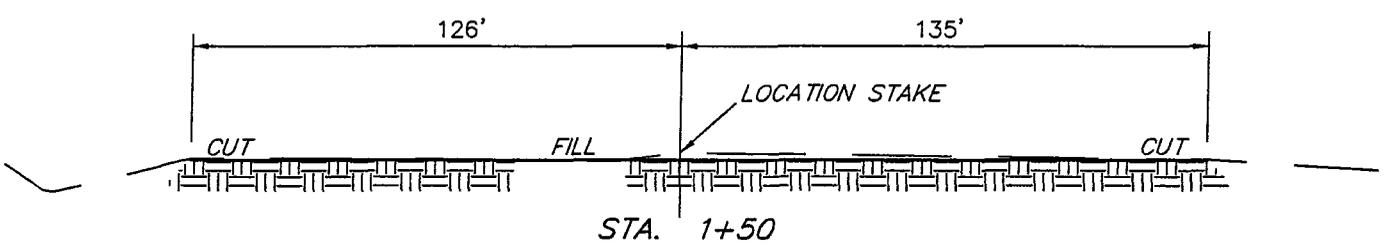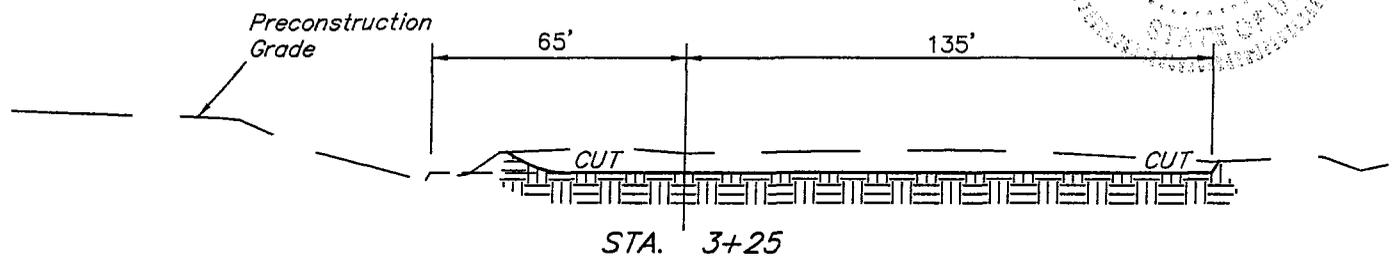


NOTE:
Topsoil should not be Stripped Below Finished Grade on Substructure Area.

* NOTE:
FILL QUANTITY INCLUDES 5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,510 Cu. Yds.
Remaining Location	= 3,840 Cu. Yds.
TOTAL CUT	= 5,350 CU.YDS.
FILL	= 2,180 CU.YDS.

EXCESS MATERIAL	= 3,170 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,170 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.

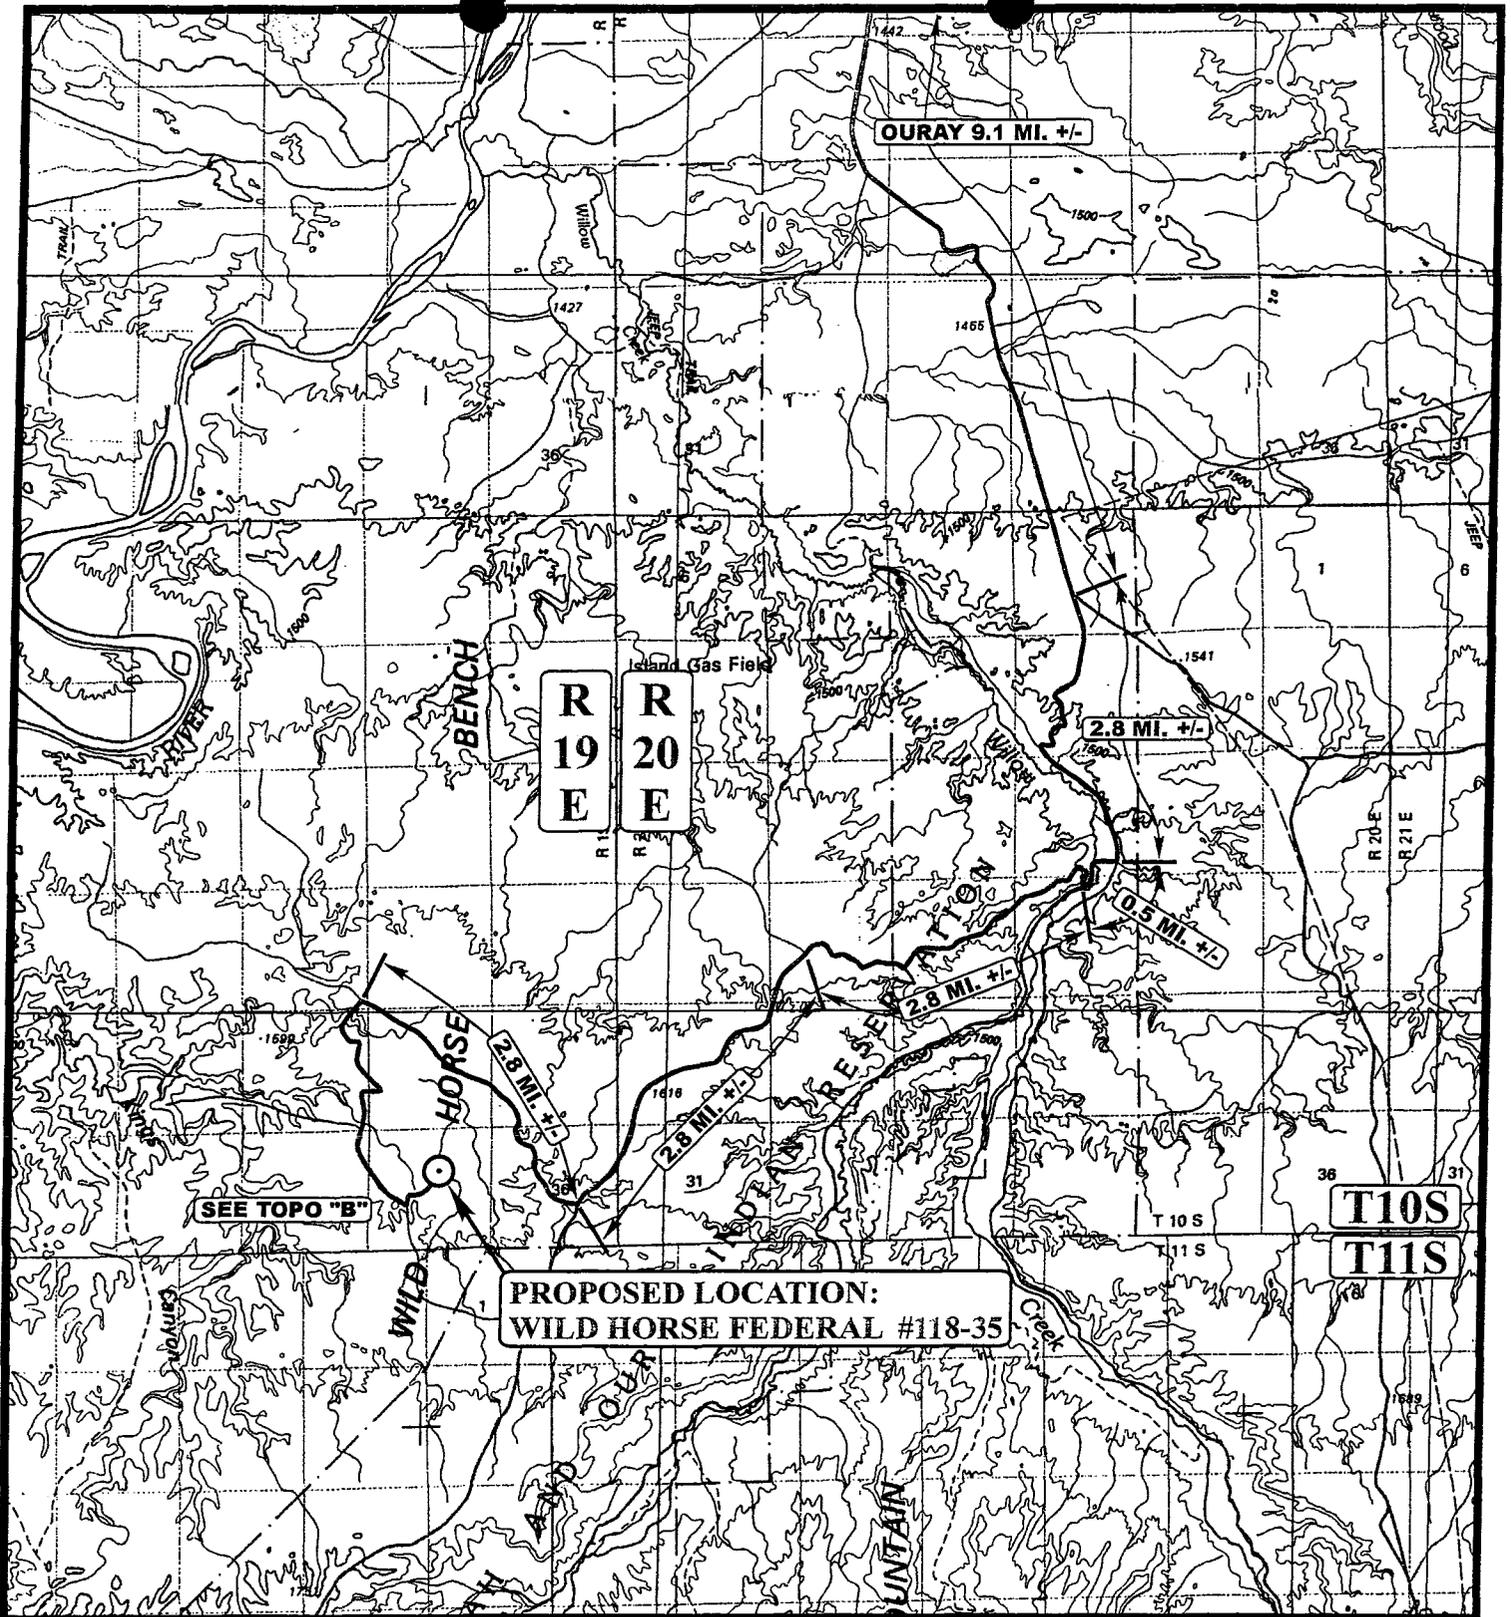

LEGEND:

○ PROPOSED LOCATION



EOG RESOURCES, INC.

**WILD HORSE FEDERAL #118-35
SECTION 35, T10S, R19E, S.L.B.&M.
1800' FNL 2164' FEL**




Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC 03 23 05
MAP MONTH DAY YEAR

SCALE: 1:100,000 DRAWN BY: L.K. REVISED: 00-00-00



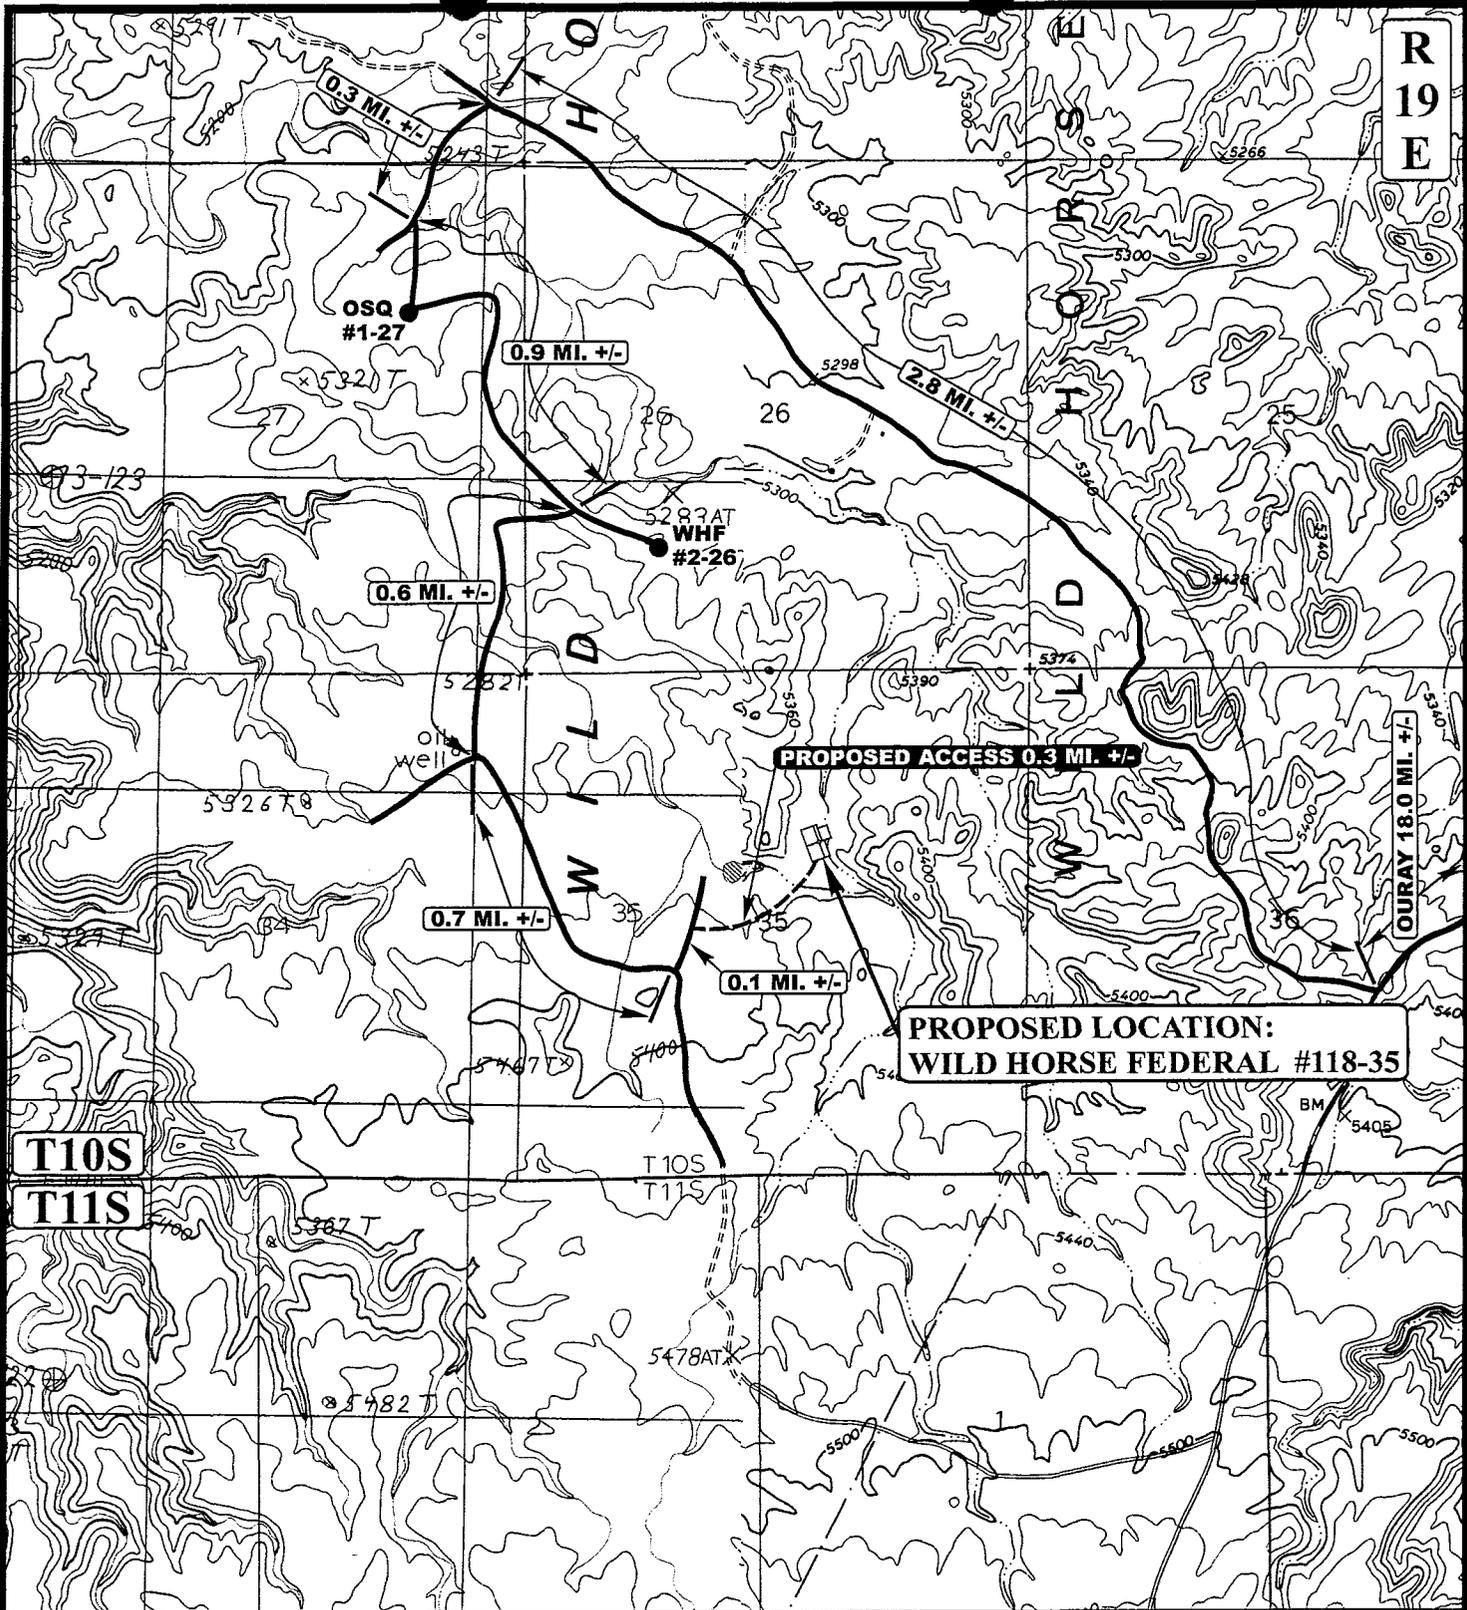

R
19
E

T10S
T11S

**PROPOSED LOCATION:
WILD HORSE FEDERAL #118-35**

LEGEND:

- EXISTING ROAD
- - - - - PROPOSED ACCESS ROAD



EOG RESOURCES, INC.


**WILD HORSE FEDERAL #118-35
SECTION 35, T10S, R19E, S.L.B.&M.
1800' FNL 2164' FEL**



Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC 03 23 05
MAP MONTH DAY YEAR
SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 00-00-00



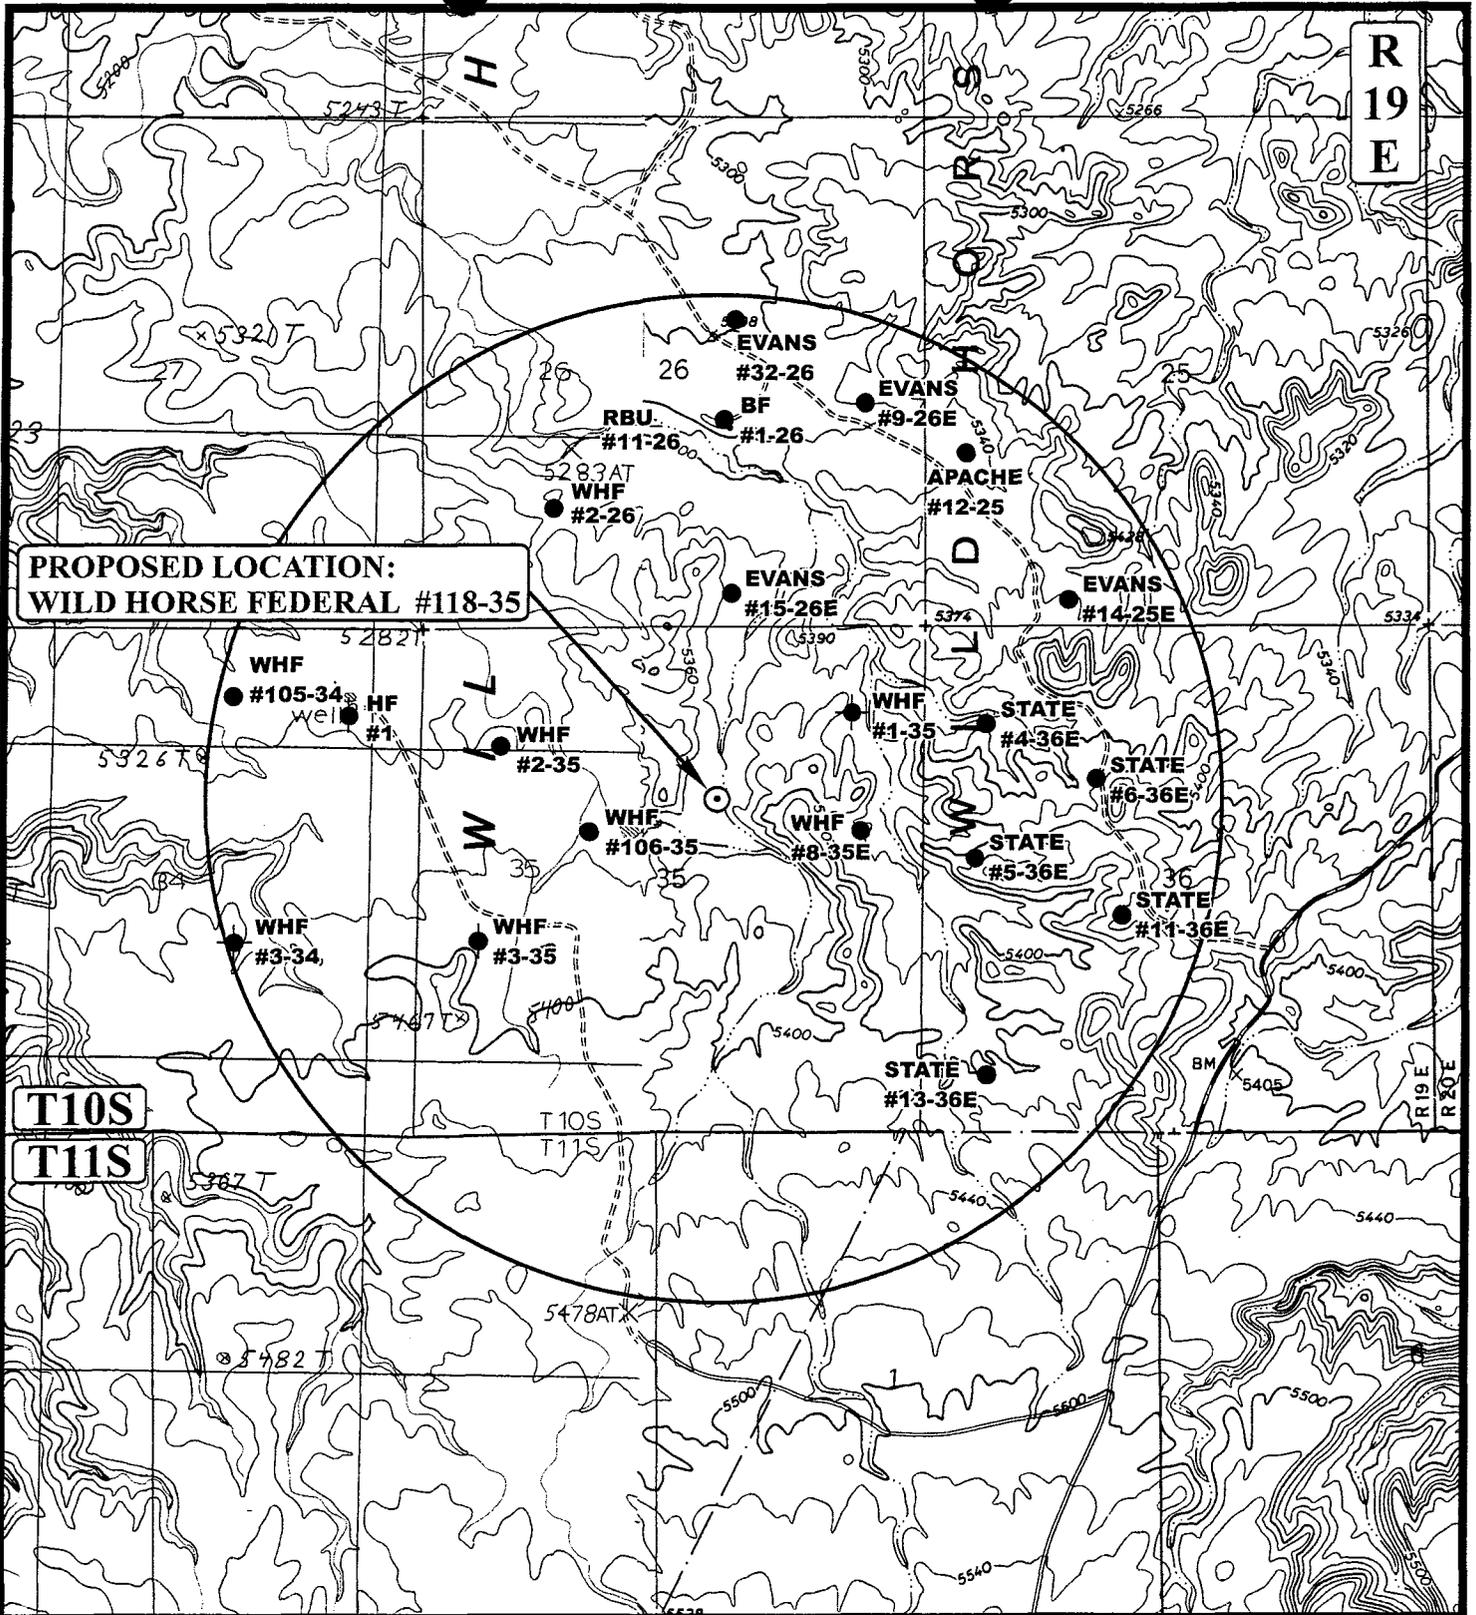

**PROPOSED LOCATION:
WILD HORSE FEDERAL #118-35**

T10S

T11S

**R
19
E**

LEGEND:

- ∅ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ♂ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED

EOG RESOURCES, INC.

**WILD HORSE FEDERAL #118-35
SECTION 35, T10S, R19E, S.L.B.&M.
1800' FNL 2164' FEL**



Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC MAP
03 23 05
MONTH DAY YEAR
SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 00-00-00



APD RECEIVED: 05/23/2005

API NO. ASSIGNED: 43-047-36750

WELL NAME: WH FED 118-35
OPERATOR: EOG RESOURCES INC (N9550)
CONTACT: ED TROTTER

PHONE NUMBER: 435-789-4120

PROPOSED LOCATION:

SWNE 35 100S 190E
SURFACE: 1800 FNL 2164 FEL
BOTTOM: 1800 FNL 2164 FEL
UINTAH
NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal
LEASE NUMBER: U-3405
SURFACE OWNER: 1 - Federal
PROPOSED FORMATION: PRRV
COALBED METHANE WELL? NO

LATITUDE: 39.90591
LONGITUDE: -109.7470

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. NM-2308)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 49-1501)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)


LOCATION AND SITING:

- R649-2-3.
- Unit _____
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: _____
Eff Date: _____
Siting: _____
- R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: _____

1- Federal Approval
2- Spacing Slip

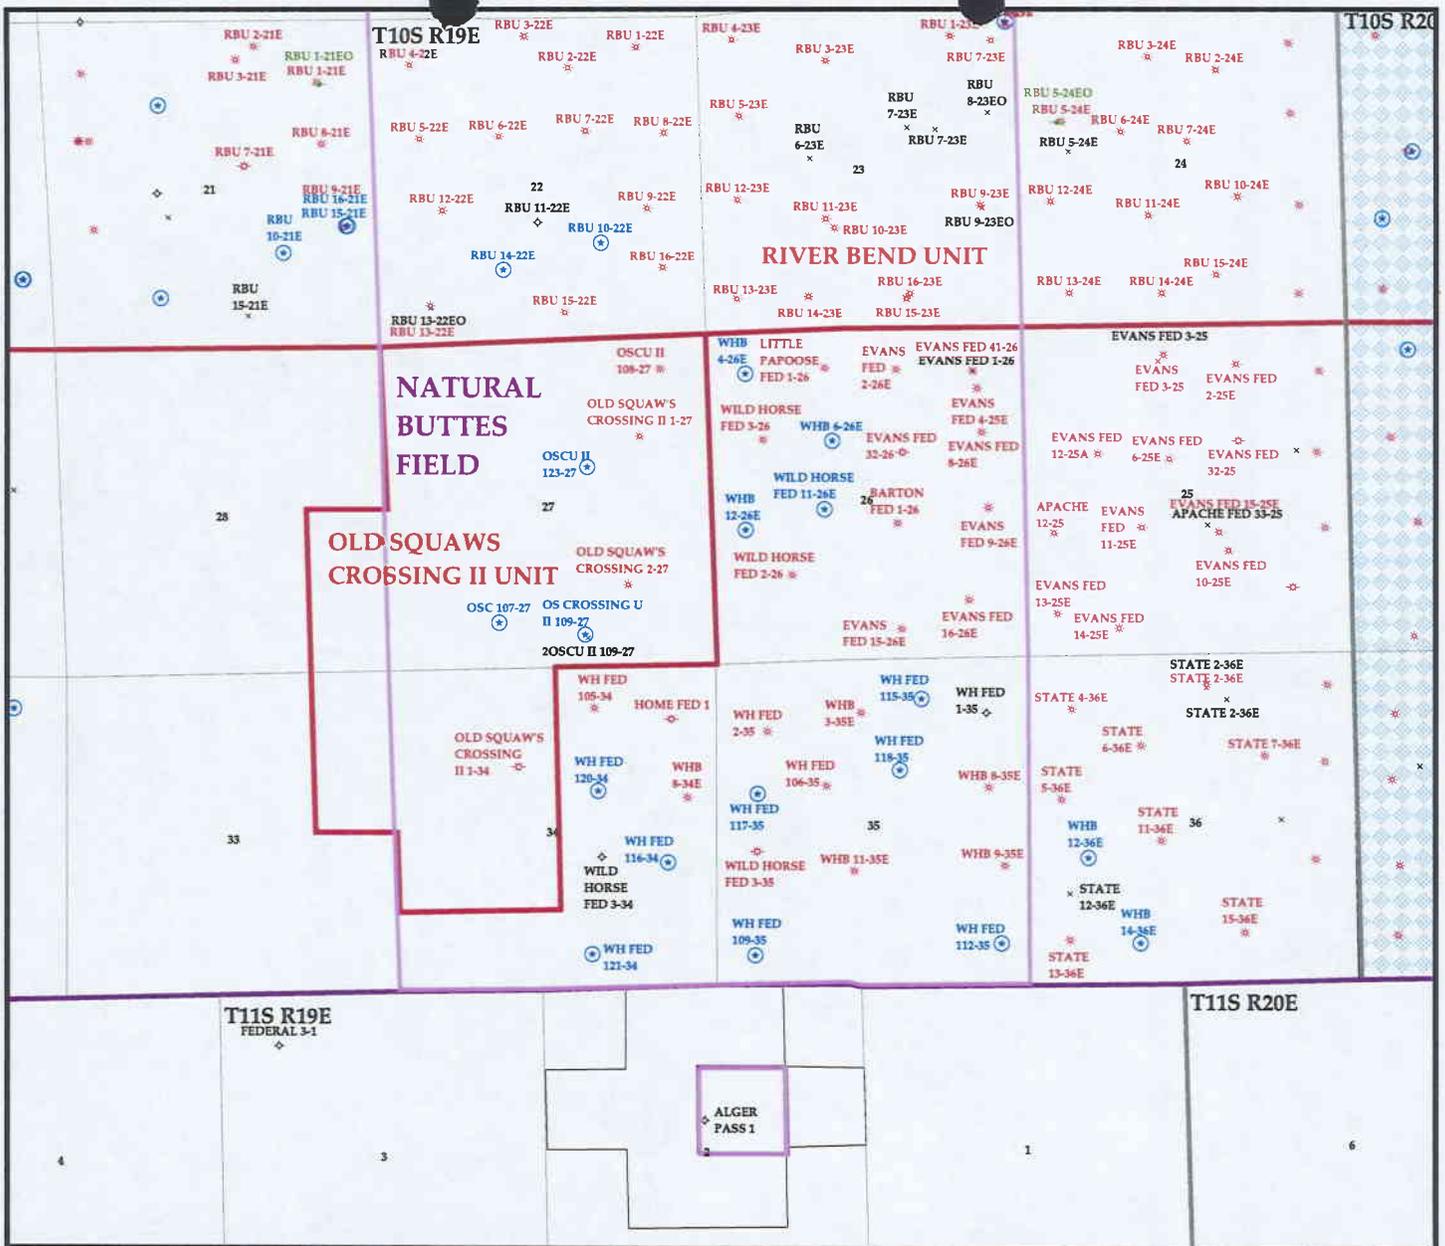

OPERATOR: EOG RESOURCES INC (N9550)

SEC: 35 T. 10S R. 19E

FIELD: NATUREAL BUTTES (630)

COUNTY: UINTAH

SPACING: R649-3-2 / GENERAL SITING



Wells	Units.shp	Fields.shp
☆ GAS INJECTION	□ EXPLORATORY	□ ABANDONED
☆ GAS STORAGE	□ GAS STORAGE	□ ACTIVE
× LOCATION ABANDONED	□ NF PP OIL	□ COMBINED
⊕ NEW LOCATION	□ NF SECONDARY	□ INACTIVE
◇ PLUGGED & ABANDONED	□ PENDING	□ PROPOSED
☆ PRODUCING GAS	□ PI OIL	□ STORAGE
● PRODUCING OIL	□ PP GAS	□ TERMINATED
⊖ SHUT-IN GAS	□ PP GEOTHERML	
⊖ SHUT-IN OIL	□ PP OIL	
× TEMP. ABANDONED	□ SECONDARY	
○ TEST WELL	□ TERMINATED	
◆ WATER INJECTION		
◆ WATER SUPPLY		
◆ WATER DISPOSAL		



PREPARED BY: DIANA WHITNEY
DATE: 26-MAY-2005

**State of Utah****Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

May 26, 2005

EOG Resources, Inc.
P O Box 1815
Vernal, UT 84078

Re: Wild Horse Federal 118-35 Well, 1800' FNL, 2164' FEL, SW NE, Sec. 35,
T. 10 South, R. 19 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-36750.

Sincerely,

Gil Hunt
Acting Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: EOG Resources, Inc.
Well Name & Number Wild Horse Federal 118-35
API Number: 43-047-36750
Lease: U-3405

Location: SW NE Sec. 35 T. 10 South R. 19 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED
SEP 20 2005

APPLICATION FOR PERMIT TO DRILL OR REENTER

5. Lease Serial No.
U-3405

6. If Indian, Allottee or Tribe Name

7. If Unit or CA Agreement, Name and No.

8. Lease Name and Well No.
Wild Horse Federal 118-35

9. API Well No.
43-047-36750

10. Field and Pool, or Exploratory
NATURAL BUTTES

11. Sec., T., R., M., or Blk. and Survey or Area
**SEC. 35, T10S, R19E,
S.L.B.&M.**

12. County or Parish
UINTAH

13. State
UTAH

17. Spacing Unit dedicated to this well
40

20. BLM/BIA Bond No. on file
NM-2308

23. Estimated duration
45 DAYS

1a. Type of Work: DRILL REENTER

1b. Type of Well: Oil Well Gas Well Other Single Zone Multiple Zone

2. Name of Operator
EOG RESOURCES, INC.

3a. Address **P.O. BOX 1815
VERNAL, UT 84078**

3b. Phone No. (Include area code)
(435)789-0790

4. Location of Well (Report location clearly and in accordance with any State requirements. *)
At surface **1800' FNL, 2164' FEL** **SW/NE**
At proposed prod. Zone

14. Distance in miles and direction from nearest town or post office*
23.7 MILES SOUTHWEST OF OURAY, UTAH

15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. Unit line, if any)
1800'

16. No. of Acres in lease
1600

18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. See Topo Map C

19. Proposed Depth
8150'

21. Elevations (Show whether DF, KDB, RT, GL, etc.)
5349.0 FEET GRADED GROUND


22. Approximate date work will start*
UPON APPROVAL

24. Attachments

Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:


- 1. Well plat certified by a registered surveyor.
- 2. A Drilling Plan.
- 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- 5. Operator certification.
- 6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature  Name (Printed/Typed) **Ed Trotter** Date **May 19, 2005**

Title
Agent

RECEIVED
SEP 06 2005

DIV. OF OIL, GAS & MINING
Date **08/31/2005**

Approved by (Signature)  Name (Printed/Typed) _____ Date _____
Title **Mineral Resources** Office _____

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of Approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)
NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED

CONDITIONS OF APPROVAL
APPLICATION FOR PERMIT TO DRILL

Company/Operator: EOG Resources, Inc.

Well Name & Number: Wild Horse 118-35

Lease Number: U-3405

API Number: 43-047-36750

Location: SWNW Sec. 35 T.10S R. 19E

Agreement: N/A

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

CONDITIONS OF APPROVAL FOR NOTICE TO DRILL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands to John Mayers of this office **prior to setting the next casing string or requesting plugging orders**. Faxed copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a **3M** system and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint. Surface casing setting depths are based on ground level elevations only.

All casing strings below the conductor shall be pressure tested to 0.22 psi/ft of casing string length or 1500 psi, whichever is greater but not to exceed 70% of the minimum internal yield.

As a minimum requirement, the cement behind to production casing must extend at least 200' above the top of the Wasatch Formation which has been identified at ±3749'.

If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

A cement bond log (CBL) will be run from the production casing shoe to top of the cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. Two copies of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the AO.

Please submit an electronic copy of all logs run on this well in LAS format. This submission will supersede the requirement for submittal of paper logs to the BLM. The cement bond log must be submitted in raster format (TIF, PDF or other).

6. Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Written notification of such must be submitted to this office not later than five (5) days following the date on which the well is placed on production.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-5(d) shall be submitted to the appropriate Field Office within 60 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (1).

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergencies, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within thirty (30) days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling onlease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas

meters will be calibrated in place prior to any deliveries and tested for meter accuracy at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, you must contact one of the following individuals:

Kirk Fleetwood (435) 828-7874
Petroleum Engineer

Michael Lee (435) 828-7875
Petroleum Engineer

Matt Baker (435) 828-4470
Petroleum Engineer

BLM FAX Machine (435) 781-4410

EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids.

Company/Operator: EOG Resources Inc.

API Number 43-047-36750

Well Name & Number: WHF 118-35

Lease number: UTU-03405

Location: SWNE Sec. 35 T.10S. R. 19E.

Surface Ownership: BLM

Date NOS Received: 4/14/05

Date APD Received: 5/20/05

Within 90 calendar days of the approval date for this Application for Permit to Drill (APD), the operator/lessee shall submit to the Authorized Officer (AO), on Sundry Notice Form 3160-5, an Interim Surface Reclamation Plan for surface disturbance on well pads, access roads, and pipelines. At a minimum, this will include the reshaping of the pad to the original contour to the extent possible; the respreading of the top soil up to the rig anchor points; and, the area reseeded using appropriate reclamation methods. The AO will provide written approval or concurrence within 30 calendar days of receipt.

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

Name of Company: EOG RESOURCES INC

Well Name: WH FED 118-35

Api No: 43-047-36750 Lease Type: FEDERAL

Section 35 Township 10S Range 19E County UINTAH

Drilling Contractor ROCKER DRILLING RIG # 1

SPUDDED:

Date 03/03/06

Time 8:00 AM

How DRY

Drilling will Commence: _____

Reported by DALL COOK

Telephone # 1-435-828-3630

Date 03/03/2006 Signed CHD

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE- Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator **EOG RESOURCES, INC.**

3a. Address
P.O. Box 1815 Vernal, UT 84078

3b. Phone No. (include area code)
435-781-9111

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
**(SW/NE) 1800 FNL 2164 FEL
 SECTION 35, T10S, R19E 39.905942 LAT 109.747756 LON**

5. Lease Serial No.
U-3405

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
WILD HORSE FEDERAL 118-35

9. API Well No.
43-047-36750

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input checked="" type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. requests authorization for disposal of produced water from the referenced well to any of the following locations.

- 1. Natural Buttes Unit 21-20B SWD.**
- 2. Ace Disposal**
- 3. RN Industries.**


Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

14. I hereby certify that the foregoing is true and correct
 Name (Printed/Typed)

Kaylene R. Gardner

Title **Regulatory Assistant**

Signature



Date

03/07/2006

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

RECEIVED

MAR 08 2006

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE- Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator **EOG RESOURCES, INC.**

3a. Address
P.O. Box 1815 Vernal, UT 84078

3b. Phone No. (include area code)
435-781-9111

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
**(SW/NE) 1800 FNL 2164 FEL
 SECTION 35, T10S, R19E 39.905942 LAT 109.747756 LON**

5. Lease Serial No.
U-3405

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
WILD HORSE FEDERAL 118-35

9. API Well No.
43-047-36750

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH COUNTY, UT


12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other WELL SPUD
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. spud a 20" surface hole at the referenced location 3/3/2006 at 8:00 a.m. Dall Cook, representative for EOG, notified Matt Baker of the Vernal BLM office and Carol Daniels of the Utah Division of Oil Gas and Mining of the spud 3/2/2006 @ 8:30 p.m.

14. I hereby certify that the foregoing is true and correct
 Name (Printed/Typed) **Kaylene R. Gardner** Title **Regulatory Assistant**

Signature  Date **03/07/2006**

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

RECEIVED

MAR 08 2006

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

ENTITY ACTION FORM

Operator: EOG RESOURCES Operator Account Number: N 9550
 Address: P.O. BOX 1815
city VERNAL
state UT zip 84078 Phone Number: (435) 781-9111

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
43-047-36585	EAST CHAPITA 2-05		SWNW	5	9S	23E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
PA	99999	15220	2/24/2006			3/9/06	
Comments: <u>PRRV = MVRD</u> - J							

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
43-047-36749	WILD HORSE FEDERAL 115-35		NWNE	35	10S	19E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
PA	99999	15221	3/1/2005			3/9/06	
Comments: <u>PRRV = MVRD</u> - J							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
43-047-36750	WILD HORSE FEDERAL 118-35		SWNE	35	10S	19E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
PA	99999	15222	3/1/06			3/9/06	
Comments: <u>PRRV = MVRD</u> - J							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Keylene R. Gardner

Name (Please Print)



Signature
Regulatory Assistant

3/7/2006

Title

Date

(9/2000)

RECEIVED

MAR 08 2006

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE- Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator **EOG RESOURCES, INC.**

3a. Address
P.O. Box 1815 Vernal, UT 84078

3b. Phone No. (include area code)
435-781-9111

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
**(SW/NE) 1800 FNL 2164 FEL
 SECTION 35, T10S, R19E 39.905942 LAT 109.747756 LON**

5. Lease Serial No.
U-3405

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
WILD HORSE FEDERAL 118-35

9. API Well No.
43-047-36750

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input checked="" type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. requests authorization for disposal of produced water from the referenced well to any of the following locations.

- 1. Natural Buttes Unit 21-20B SWD.
- 2. Ace Disposal
- 3. RN Industries.

**Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY**

14. I hereby certify that the foregoing is true and correct
 Name (Printed/Typed)

Kaylene R. Gardner

Title **Regulatory Assistant**

Signature

Date

03/07/2006

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by _____

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

RECEIVED

MAR 08 2006

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE- Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
EOG Resources, Inc.

3a. Address
600 17th St., Suite 1000N, Denver, CO 80202

3b. Phone No. (include area code)
303-824-5526

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
**(SW/NE) 1800 FNL 2164 FEL
 SECTION 35, T10S, R19E 39.905942 LAT 109.747756 LON**

5. Lease Serial No.
U-3405

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
WILD HORSE FEDERAL 118-35

9. API Well No.
43-047-36750

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other Drilling operations

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

No drilling activity has occurred since spud 3/3/2006.


EOG Resources, Inc. operates under Nationwide Bond #2308.

14. I hereby certify that the foregoing is true and correct
 Name (Printed/Typed)

Mary Maestas

Title **Operations Clerk**

Signature



Date

03/09/2006

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

RECEIVED

MAR 13 2006

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE- Other instructions on reverse side.

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. U-3405
2. Name of Operator EOG RESOURCES, INC.		6. If Indian, Allottee or Tribe Name
3a. Address 600 17th St., Suite 1000N, Denver, CO 80202	3b. Phone No. (include area code) 303-824-5526	7. If Unit or CA/Agreement, Name and/or No.
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) SWNE 1800 FNL 2164 FEL SECTION 35, T10S, R19E 39.905942 LAT 109.747756 LON		8. Well Name and No. Wild Horse Federal 118-35
		9. API Well No. 43-047-36750
		10. Field and Pool, or Exploratory Area NATURAL BUTTES
		11. County or Parish, State UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Commingling
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. requests authorization for commingling of production from the Wasatch and Mesaverde formations in the referenced wellbore. In the event allocation of production is necessary, the allocation will be based on proportionate net pay as calculated from open hole logs. Production from the Wasatch and Mesaverde formations will be commingled in the wellbore and produced through open ended 2-3/8" tubing landed below all perforations in the 4-1/2" production casing.

Attached is a map showing the location of all wells on contiguous oil and gas leases or drilling units and an affidavit showing that this application has been provided to owners of all contiguous oil and gas leases or drilling units overlying the pool.

EOG Resources, Inc. operates under Nationwide Bond #2308

**Accepted by the
Utah Division of
Oil, Gas and Mining**

**Federal Approval of This
Action is Necessary**

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

Mary Maestas

Date: **5/16/06**
By: *[Signature]*
Title: **Operations Clerk**

Signature

[Signature: Mary Maestas]

Date

04/21/2006

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

**6-21-06
CHO**

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**RECEIVED
APR 24 2006
DIV. OF OIL, GAS & MINING**

STATE OF COLORADO)
)ss
COUNTY OF DENVER)

AFFIDAVIT

Mary Maestas, of lawful age, being first duly sworn upon oath, deposes and says: She is the Operations Clerk of EOG Resources, Inc., of Denver, Colorado. EOG Resources, Inc. is the operator of the following described well:


**Wild Horse Federal 118-35
1800 FNL 2164 FEL (SWNE)
SECTION 35, T10S, R19E
UINTAH COUNTY, UTAH**

EOG Resources, Inc., and Dominion Exploration & Production, Inc., Exhibit A, are the only owners in the well and/or of all contiguous oil and gas leases or drilling units overlying the pool.

On the 21st day of April, 2006 she placed in the United States mail, with postage prepaid, a copy of the attached Application for Commingling in one wellbore for the subject well.


Said envelope which contained these instruments was addressed to the Utah Division of Oil, Gas & Mining, Bureau of Land Management, and Dominion Exploration & Production, Inc.

Further affiant sayeth not.



Mary Maestas
Operations Clerk

Subscribed and sworn before me this 21st day of April, 2006.



My Commission Expires 07/26/2007
My Commission Expires:




Notary Public


Exhibit "A" to Affidavit
Wild Horse Federal 118-35 Application to Commingle

Dominion Exploration & Production, Inc.
14000 Quail Springs Parkway, Suite 600
Oklahoma City, Oklahoma 73134-2600
Attention: Mr. Rusty Waters

R 19 E

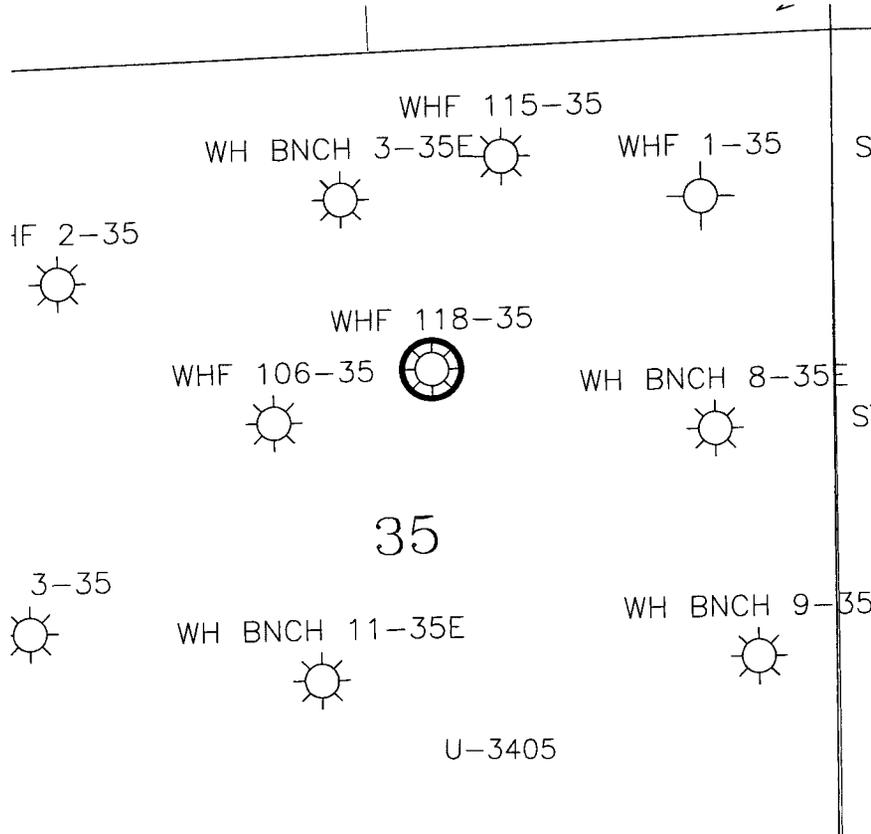

○ WILD HORSE FEDERAL 118-35



Geog resources		Denver Division
EXHIBIT "A"		
WILD HORSE FEDERAL 118-35		
Commingling Application		
Uintah County, Utah		
Scale: 1" = 1000'	D:\utah\Commingled\page_WhF118-35_commingled.WELL	Author TLM
		Apr 20, 2006 - 2:00pm

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE- Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator **EOG RESOURCES, INC.**

3a. Address
P.O. Box 1815 Vernal, UT 84078

3b. Phone No. (include area code)
435-781-9111

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
**(SW/NE) 1800 FNL 2164 FEL
 SECTION 35, T10S, R19E 39.905942 LAT 109.747756 LON**

5. Lease Serial No.
U-3405

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
WILD HORSE FEDERAL 118-35

9. API Well No.
43-047-36750

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other WATER
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	EVAPORATION
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. respectfully requests permission to utilize the reserve pit on the referenced location for purposes of water evaporation. Pit water will be hauled into the referenced pit for evaporation purposes only. EOG will reclaim the reserve pit on the referenced location no later than November, 2006.

REQUEST DENIED
 Utah Division of
 Oil, Gas and Mining

Date: 06/07/06
 By: [Signature]

6/20/06
 CJO

14. I hereby certify that the foregoing is true and correct
 Name (Printed/Typed)

Kaylene R. Gardner

Title **Regulatory Assistant**

Signature

[Signature]

Date

06/06/2006

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

JUN 07 2006

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE- Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator **EOG Resources, Inc.**

3a. Address
600 17th Street, Suite 1000N, Denver, CO 80202

3b. Phone No. (include area code)
303-824-5526

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
**1800' FNL & 2164' FEL (SW/NE)
 Sec. 35-T10S-R19E 39.905942 LAT 109.747756 LON**

5. Lease Serial No.
U-3405

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
Wild Horse Federal 118-35

9. API Well No.
43-047-36750

10. Field and Pool, or Exploratory Area
Natural Buttes/Wasatch

11. County or Parish, State
Uintah County, Utah

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Water evaporation unit
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. placed a water evaporation system on the referenced location as per verbal approval with Paul Buhler, BLM Vernal Field Office. Each unit consists of a 3" trash pump, a single/double evaporation unit consisting of 16-32 spray nozzles sprinkling fluids approximately 3'-4' into the atmosphere. All fluids are fully contained within the reserve pit. The unit will be in place until the pit is fully evaporated. The pit has been reclaimed.

**Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY**

**RECEIVED
SEP 18 2006**

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct
 Name (Printed/Typed)

Mary A. Maestas

Title **Regulatory Assistant**

Signature

Mary A. Maestas

Date

09/15/2006

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE- Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator **EOG RESOURCES, INC.**

3a. Address
P.O. Box 1815 Vernal, UT 84078

3b. Phone No. (include area code)
435-781-9111

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
**(SW/NE) 1800 FNL 2164 FEL
 SECTION 35, T10S, R19E 39.905942 LAT 109.747756 LON**

5. Lease Serial No.
U-3405

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
WILD HORSE FEDERAL 118-35

9. API Well No.
43-047-36750

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>CHANGE TANK</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<u>SIZE</u>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	


13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. respectfully requests permission to set two (2) 400 bbl vertical condensate tanks and attaching piping on the referenced location.

*10/6/06
DM*

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) **Kaylene R. Gardner** Title **Regulatory Assistant**

Signature  Date **05/22/2006**

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by _____ Title **Utah Division of Oil, Gas and Mining** Date _____ Federal Approval Of This Action Is Necessary

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Date: *6/12/06*

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

RECEIVED
MAY 31 2006

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No. U-3405
6. If Indian, Allottee or Tribe Name
7. If Unit or CA/Agreement, Name and/or No.
8. Well Name and No. WILD HORSE FEDERAL 118-35
9. API Well No. 43-047-36750
10. Field and Pool, or Exploratory Area NATURAL BUTTES
11. County or Parish, State UINTAH COUNTY, UT

SUBMIT IN TRIPLICATE- Other instructions on reverse side.


1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other	
2. Name of Operator EOG RESOURCES, INC.	
3a. Address P.O. Box 1815 Vernal, UT 84078	3b. Phone No. (include area code) 435-781-9111
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) (SW/NE) 1800 FNL 2164 FEL SECTION 35, T10S, R19E 39.905942 LAT 109.747756 LON	

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input checked="" type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input type="checkbox"/> Other _____

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

INITIAL PRODUCTION: The referenced well was turned to sales at 9:30 a.m., 5/29/2006 through Questar meter # 7005 on a 12/64" choke. Opening pressure, FTP 1600 psig, CP 1900 psig.

14. I hereby certify that the foregoing is true and correct Name (Printed/Typed) Kaylene R. Gardner		Title Regulatory Assistant
Signature 	Date 05/31/2006	
THIS SPACE FOR FEDERAL OR STATE OFFICE USE		

Approved by _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office _____	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

RECEIVED
JUN 02 2006
DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
WELL COMPLETION OR RECOMPLETION REPORT AND LOG

FORM APPROVED
OMB NO. 1004-0137
Expires: March 31, 2007

5. Lease Serial No. **U-3405**

6. If Indian, Allottee or Tribe Name

7. Unit or CA Agreement Name and No.

8. Lease Name and Well No. **Wild Horse Federal 118-35**

9. AFI Well No. **43-047-36750**

10. Field and Pool, or Exploratory **Natural Buttes/Wasatch**

11. Sec., T., R., M., on Block and Survey or Area **Sec. 35-T10S-R19E**

12. County or Parish **Uintah County** | 13. State **UT**

17. Elevations (DF, RKB, RT, GL)* **5350' NAT GL**

1a. Type of Well Oil Well Gas Well Dry Other

b. Type of Completion: New Well Work Over Deepen Plug Back Diff. Resrv.,
Other _____

2. Name of Operator **EOG Resources, Inc.**

3. Address **600 17th Street, Suite 1000N, Denver, CO 80202** 3a. Phone No. (include area code) **303-824-5526**

14. Date Spudded **03/03/2006** 15. Date T.D. Reached **04/07/2006** 16. Date Completed **05/29/2006**
 D & A Ready to Prod.

18. Total Depth: MD **8150** 19. Plug Back T.D.: MD **8122** 20. Depth Bridge Plug Set: MD
TVD TVD TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each) **RST/CBL/CCL/VDL/GR**

22. Was well cored? No Yes (Submit analysis)
Was DST run? No Yes (Submit report)
Directional Survey? No Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sks. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12-1/4"	9-5/8"	J-55	40.0#	0-2278		875 sx			
7-7/8"	4-1/2"	N-80	11.6#	0-8145		1455 sx			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-3/8"	6699							

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Wasatch	4972	7918	7835-7918		3/spf	
B)			7750-7782		3/spf	
C)			7187-7466		2/spf	
D)			6764-7117		2/spf	

26. Perforation Record

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

Depth Interval	Amount and Type of Material
7835-7918	42,921 GALS GELLED WATER & 127,200# 20/40 SAND
7750-7782	43,131 GALS GELLED WATER & 139,400# 20/40 SAND
7187-7466	29,455 GALS GELLED WATER & 75,400# 20/40 SAND
6764-7117	29,397 GALS GELLED WATER & 73,600# 20/40 SAND

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
05/29/2006	06/03/2006	24	→	23	977	13			FLOWS FROM WELL
Choke Size	Tbg. Press. Flwg. SI	Csg. Press. SI	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	Production Method
12/64"	SI 1900	1900	→						PRODUCING GAS WELL

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press. SI	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	Production Method
			→						

*(See instructions and spaces for additional data on page 2)

RECEIVED
JUL 26 2006

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

29. Disposition of Gas (Sold, used for fuel, vented, etc.)

SOLD

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
Wasatch	4972	7918		Wasatch Chapita Wells Buck Canyon North Horn Top Mesaverde	4347 4918 5640 6553 7905

32. Additional remarks (include plugging procedure):

SEE ATTACHED SHEET.

33. Indicate which items have been attached by placing a check in the appropriate boxes:

- Electrical/Mechanical Logs (1 full set req'd.)
 Geologic Report
 DST Report
 Directional Survey
 Sundry Notice for plugging and cement verification
 Core Analysis
 Other:

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) Mary A. Maestas

Title Operations Clerk

Signature

Mary A. Maestas

Date 07/19/2006

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Wild Horse Federal 118-35 - ADDITIONAL REMARKS (CONTINUED):

26. PERFORATION RECORD

6259-6547	2/spf
5907-6079	3/spf
5674-5774	3/spf
5466-5530	3/spf
5163-5335	3/spf
4972-5069	3/spf

27. ACID, FRACTURE TREATMENT, CEMENT SQUEEZE, ETC.

6259-6547	22,638 GALS GELLED WATER & 77,700# 20/40 SAND
5907-6079	17,682 GALS GELLED WATER & 48,000# 20/40 SAND
5674-5774	21,336 GALS GELLED WATER & 77,000# 20/40 SAND
5466-5530	29,064 GALS GELLED WATER & 120,000# 20/40 SAND
5163-5335	25,452 GALS GELLED WATER & 96,000# 20/40 SAND
4972-5069	19,320 GALS GELLED WATER & 67,120# 20/40 SAND

Perforated the Mesaverde/Island from 7835'-37', 7840'-44', 7852'-54' & 7916'-18' w/ 3 spf.

Perforated the Island from 7750'-54', 7762'-64' & 7778'-82' w/ 3 spf.

Perforated the North Horn from 7187'-88', 7198'-99', 7278'-79', 7286'-88', 7346'-48', 7418'-20' & 7465'-66' w/ 2 spf.

Perforated the North Horn from 6764'-65', 6942'-43', 7035'-37', 7079'-81', 7108'-09' & 7115'-17' w/ 2 spf.

Perforated the Buck Canyon from 6259'-60', 6288'-89', 6341'-42', 6388'-90', 6456'-58' & 6545'-47' w/ 2 spf.

Perforated the Buck Canyon from 5907'-09', 5919'-20', 5930'-32', 5952'-54', 5986'-87', 6064'-65' & 6078'-79' w/ 3 spf.

Perforated the Buck Canyon from 5674'-76', 5680'-82', 5691'-93' & 5773'-74' w/ 3 spf.

Perforated the Chapita Wells from 5466'-68', 5480'-82', 5492'-94', 5522'-23' & 5528'-30' w/ 3 spf.

Perforated the Chapita Wells from 5163'-67', 5178'-80', 5190'-94' & 5333'-35' w/ 3 spf.

Perforated the Chapita Wells from 4972'-74', 5054'-56', 5061'-62' & 5067'-69' w/ 3 spf.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE- Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator **EOG Resources, Inc.**

3a. Address **600 17th Street, Suite 1000N, Denver, CO 80202**

3b. Phone No. (include area code)
303-824-5526

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
**1800' FNL & 2164' FEL (SW/NE)
 Sec. 35-T10S-R19E 39.905942 LAT 109.747756 LON**

5. Lease Serial No.
U-3405

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
Wild Horse Federal 118-35

9. API Well No.
43-047-36750

10. Field and Pool, or Exploratory Area
Natural Buttes/Wasatch

11. County or Parish, State
Uintah County, Utah

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Pit reclamation
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

The reserve pit for the referenced location was closed 8/5/2006 as per the APD procedure.

14. I hereby certify that the foregoing is true and correct
 Name (Printed/Typed)

Mary A. Maestas

Title **Regulatory Assistant**

Signature

Mary A. Maestas

Date

01/16/2007

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

RECEIVED

JAN 18 2007

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
U-3405

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE – Other instructions on page 2.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
EOG Resources, Inc.

3a. Address
600 17th Street, Suite 1000N
Denver, CO 80202

3b. Phone No. (include area code)
(303) 262-2812

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
1,800' FNL & 2,164' FEL (SWNE) Sec. 35-T10S-R19E 39.905942 LAT 109.747756 LON

7. If Unit of CA/Agreement, Name and/or No.

8. Well Name and No.
Wild Horse Federal 118-35

9. API Well No.
43-047-36750

10. Field and Pool or Exploratory Area
Natural Buttes/Wasatch/Mesaverde

11. Country or Parish, State
Uintah County, Utah

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>Interim reclamation</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

All material, debris, trash, and junk was removed from the location. The reserve pit was reclaimed. Stockpiled topsoil was spread over the pit area and broadcast seeded with the prescribed seed mixture. The seeded area was then walked down with a cat. Interim reclamation was completed on June 8, 2007.

RECEIVED


AUG 31 2007

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct.

Name (Printed/Typed)
Carrie MacDonald

Title Operations Clerk

Signature 

Date 08/30/2007

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET (for state use only)

ROUTING
CDW

X - Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

10/1/2011

FROM: (Old Operator): N9550-EOG Resources, Inc. 1060 E Highway 40 Vernal, UT 84078 Phone: 1 (435) 781-9145	TO: (New Operator): N3755-Koch Exploration Company, LLC. 9777 Pyramid Court, Suite 210 Englewood, CO 80112 Phone: 1 (303) 325-2561
---	--

CA No.

Unit:

WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
SEE ATTACHED LIST - 28 WELLS								

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 11/9/2011
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 11/9/2011
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 6/29/2011
- Is the new operator registered in the State of Utah: _____ Business Number: 5078823-0161
- (R649-9-2) Waste Management Plan has been received on: _____ Requested 12/19/2011
- Inspections of LA PA state/fee well sites complete on: n/a
- Reports current for Production/Disposition & Sundries on: ok
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 11/2/2011 BIA
- Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: 10/24/2011
- Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: not yet
- Underground Injection Control ("UIC")** Division has approved UIC Form 5 Transfer of Authority to Inject, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: n/a

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 12/19/2011
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 12/19/2011
- Bond information entered in RBDMS on: n/a
- Fee/State wells attached to bond in RBDMS on: n/a
- Injection Projects to new operator in RBDMS on: n/a
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: COB000296
- Indian well(s) covered by Bond Number: n/a
- (R649-3-1) The **NEW** operator of any state/fee well(s) listed covered by Bond Number n/a
- The **FORMER** operator has requested a release of liability from their bond on: n/a

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **NEW** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: n/a

COMMENTS: Five undrilled APDs are not being transferred at this time and may be rescinded in the future.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
Multiple Leases

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2.

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		7. If Unit of CA/Agreement, Name and/or No. Natural Buttes
2. Name of Operator EOG Resources, Inc N9550		8. Well Name and No. Multiple Wells
3a. Address 1060 EAST HIGHWAY 40, VERNAL, UT 84078	3b. Phone No. (include area code) 435-781-9145	9. API Well No. See Attached
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) See Attached		10. Field and Pool or Exploratory Area Natural Buttes
		11. Country or Parish, State Uintah, Utah

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>Change of Operator</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. has assigned all of its right, title and interest in the wells described in the attached list (the "Subject Wells") to Koch Exploration Company, LLC and will relinquish and transfer operatorship of all of the Subject Wells to Koch Exploration Company, LLC on October 1, 2011.

As of October 1, 2011, Koch Exploration Company, LLC will be considered to be the operator of each of the Subject Wells and will be responsible under the terms and conditions of the applicable lease for the operations conducted upon the leased lands. Bond coverage is provided under Koch Exploration Company, LLC's Nationwide BLM Bond No. COB00296.

KOCH EXPLORATION COMPANY, LLC **N3755**

By:  Date: September 1, 2011
Brian J. Kissick
Vice President

Address: 9777 Pyramid Court, Suite 210
Englewood, Colorado 80112

Telephone Number: (303) 325-2561


RECEIVED

NOV 09 2011


DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct.

Name (Printed/Typed) J. Michael Schween Title Agent and Attorney-in-Fact

Signature  Date 09/01/2011

THIS SPACE FOR FEDERAL OR STATE OFFICE USE APPROVED 12/19/2011

Approved by 
Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



Change of Operator from EOG Resources, Inc (N9555)
to Koch Exploration Company, LLC (N3755)

HOME FED 1	34	100S	190E	4304730223	10	Federal	GW	S
LITTLE PAPOOSE FED 1-26	26	100S	190E	4304731779	10715	Federal	GW	P
WH FED 2-26	26	100S	190E	4304731882	11051	Federal	GW	P
WH FED 2-35	35	100S	190E	4304731901	11254	Federal	GW	P
WH FED 3-26	26	100S	190E	4304732377	11439	Federal	GW	P
WH FED 3-35	35	100S	190E	4304732389	11444	Federal	GW	P
WILDHORSE FED 105-34	34	100S	190E	4304733419	12689	Federal	GW	S
WILDHORSE FED 106-35	35	100S	190E	4304733420	12688	Federal	GW	P
WHB 8-35E	35	100S	190E	4304735038	14118	Federal	GW	S
WHB 8-34E	34	100S	190E	4304735044	14404	Federal	GW	P
WHB 11-35E	35	100S	190E	4304735053	14426	Federal	GW	P
WHB 3-35E	35	100S	190E	4304735066	14403	Federal	GW	P
WHB 9-35E	35	100S	190E	4304735067	14405	Federal	GW	P
WH FED 120-34	34	100S	190E	4304736744	15224	Federal	GW	P
WH FED 121-34	34	100S	190E	4304736745	15602	Federal	GW	S
WH FED 116-34	34	100S	190E	4304736746	15616	Federal	GW	P
WH FED 109-35	35	100S	190E	4304736747	15252	Federal	GW	P
WH FED 112-35	35	100S	190E	4304736748	15613	Federal	GW	S
WH FED 115-35	35	100S	190E	4304736749	15221	Federal	GW	P
WH FED 118-35	35	100S	190E	4304736750	15222	Federal	GW	S
WH FED 117-35	35	100S	190E	4304736751	15251	Federal	GW	P
WH FED 108-34	34	100S	190E	4304737668	16115	Federal	GW	P
WH FED 110-35	35	100S	190E	4304737669	16081	Federal	GW	P
WH FED 107-34	34	100S	190E	4304737681	15958	Federal	GW	P
WH FED 111-35	35	100S	190E	4304737682	16001	Federal	GW	P
WH FED 119-35	35	100S	190E	4304737683	16047	Federal	GW	P
WH FED 122-34	34	100S	190E	4304739436	16900	Federal	GW	P
WH FED 123-35	35	100S	190E	4304739437	16960	Federal	GW	P

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

SEP 22 2011

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
Multiple Leases

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
EOG Resources, Inc

3a. Address
1060 EAST HIGHWAY 40, VERNAL, UT 84078

3b. Phone No. (include area code)
435-781-9145

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
See Attached

7. If Unit of CA/Agreement, Name and/or No.
Natural Buttes

8. Well Name and No.
Multiple Wells

9. API Well No.
See Attached

10. Field and Pool or Exploratory Area
Natural Buttes

11. Country or Parish, State
Uintah, Utah

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>Change of Operator</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomple horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomple in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. has assigned all of its right, title and interest in the wells described in the attached list (the "Subject Wells") to Koch Exploration Company, LLC and will relinquish and transfer operatorship of all of the Subject Wells to Koch Exploration Company, LLC on October 1, 2011.

As of October 1, 2011, Koch Exploration Company, LLC will be considered to be the operator of each of the Subject Wells and will be responsible under the terms and conditions of the applicable lease for the operations conducted upon the leased lands. Bond coverage is provided under Koch Exploration Company, LLC's Nationwide BLM Bond No. COB000296.

KOCH EXPLORATION COMPANY, LLC

By:  Date: September 1, 2011
Brian J. Kissick
Vice President

Address: 9777 Pyramid Court, Suite 210
Englewood, Colorado 80112

Telephone Number: (303) 325-2561

RECEIVED


NOV 04 2011

DIV. OF OIL, GAS & MINING


14. I hereby certify that the foregoing is true and correct.

Name (Printed/Typed)
J. Michael Schween

Title Agent and Attorney-in-Fact

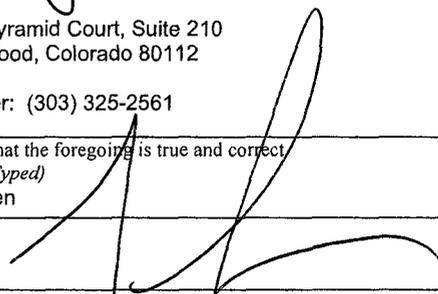Signature  Date 09/01/2011

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by  Assistant Field Manager
Lands & Mineral Resources

Date NOV 02 2011

Office VERNAL FIELD OFFICE

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

UDOGM



EXHIBIT A

API #	Well Name	Lease #	Unit Name	Unit #	Legal Description
4304730223	HOME FEDERAL 1-34	UTU3405	N/A	N/A	10S-19E-34-NENE
4304731722	OSCU II 1-27	UTU49518	North Alger	UTU063094X	10S-19E-27-SENE
4304731898	OSCU II 2-27	UTU49518	North Alger	UTU063094X	10S-19E-27-NWSE
4304733463	OSCU II 108-27	UTU49518	North Alger	UTU063094X	10S-19E-27-NENE
4304736269	OSCU II 109-27	UTU49518	North Alger	UTU063094X	10S-19E-27-SWSE
4304737680	OSCU II 116-27	UTU49518	North Alger	UTU063094X	10S-19E-27-NESE
4304737678	OSCU II 122-27	UTU49518	North Alger	UTU063094X	10S-19E-27-NWNE
4304736743	OSCU II 123-27	UTU49518	North Alger	UTU063094X	10S-19E-27-SWNE
4304737679	OSCU II 124-27	UTU49518	North Alger	UTU063094X	10S-19E-27-SESE
4304738902	OSCU II 125-34	UTU49523	North Alger	UTU063094X	10S-19E-34-NENNW
4304738901	OSCU II 126-34	UTU49523	North Alger	UTU063094X	10S-19E-34-NESW
4304735066	WHB 3-35E	UTU3405	N/A	N/A	10S-19E-35-NENNW
4304735044	WHB 8-34E	UTU3405	N/A	N/A	10S-19E-34-SENE
4304735038	WHB 8-35E	UTU3405	N/A	N/A	10S-19E-35-SENE
4304735067	WHB 9-35E	UTU3405	N/A	N/A	10S-19E-35-NESE
4304735053	WHB 11-35E	UTU3405	N/A	N/A	10S-19E-35-NESW
4304731901	WILD HORSE FED 2-35	UTU3405	N/A	N/A	10S-19E-35-NWNW
4304732389	WILD HORSE FED 3-35	UTU3405	N/A	N/A	10S-19E-35-NWSW
4304733419	WILD HORSE FED 105-34	UTU3405	N/A	N/A	10S-19E-34-NWNE
4304733420	WILD HORSE FED 106-35	UTU3405	N/A	N/A	10S-19E-35-SENW
4304737681	WILD HORSE FED 107-34	UTU49523	N/A	N/A	10S-19E-34-SESW
4304737668	WILD HORSE FED 108-34	UTU3405	N/A	N/A	10S-19E-34-SESE
4304736747	WILD HORSE FED 109-35	UTU3405	N/A	N/A	10S-19E-35-SWSW
4304737669	WILD HORSE FED 110-35	UTU3405	N/A	N/A	10S-19E-35-SWSE
4304737682	WILD HORSE FED 111-35	UTU3405	N/A	N/A	10S-19E-35-SESW
4304736748	WILD HORSE FED 112-35	UTU3405	N/A	N/A	10S-19E-35-SESE
4304736749	WILD HORSE FED 115-35	UTU3405	N/A	N/A	10S-19E-35-NWNE
4304736746	WILD HORSE FED 116-34	UTU3405	N/A	N/A	10S-19E-34-NESE
4304736751	WILD HORSE FED 117-35	UTU3405	N/A	N/A	10S-19E-35-SWNW
4304736750	WILD HORSE FED 118-35	UTU3405	N/A	N/A	10S-19E-35-SWNE
4304737683	WILD HORSE FED 119-35	UTU3405	N/A	N/A	10S-19E-35-NWSE
4304736744	WILD HORSE FED 120-34	UTU3405	N/A	N/A	10S-19E-34-SWNE
4304736745	WILD HORSE FED 121-34	UTU3405	N/A	N/A	10S-19E-34-SWSE
4304739436	WILD HORSE FED 122-34	UTU3405	N/A	N/A	10S-19E-34-NWSE
4304739437	WILD HORSE FED 123-35	UTU3405	N/A	N/A	10S-19E-35-NENE

United States Department of the Interior



BUREAU OF LAND MANAGEMENT
Green River District-Vernal Field Office
170 South 500 East
Vernal, UT 84078
(435) 781-4400 Fax: (435) 781-4410
<http://www.blm.gov/ut/st/en/fo/vernal.html>



43-047-36750

IN REPLY REFER TO:
3162.3 (UTG011)

NOV 02 2011

Brian J. Kissick
Koch Exploration Company, LLC
9777 Pyramid Court, Suite 210
Englewood, CO 80112

Re: Change of Operator
Well No. Wild Horse Federal 118-35
SWNE, Sec. 35, T10S, R19E
Uintah County, Utah
Lease No. UTU-3405

Dear Mr. Kissick:

This correspondence is in regard to the self-certification statement submitted requesting a change of operator for the above referenced well. After a review by this office, the change of operator request is approved. Effective October 1, 2011, Koch Exploration Company, LLC is responsible for all operations performed on the referenced well. All liability will now fall under your bond, BLM Bond No. COB000296, for all operations conducted on the referenced well on the leased land.

If you have any questions regarding this matter, please contact Cindy Severson of this office at (435) 781-4455.

Sincerely,

/s/ Jerry Kenczka

Jerry Kenczka
Assistant Field Manager
Lands & Mineral Resources

Enclosure

cc: UDOGM
XTO Energy, Inc.
EOG Resources, Inc.

bcc: Well File
Reading File

RECEIVED

NOV 04 2011

DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-3405
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
1. TYPE OF WELL Gas Well		7. UNIT or CA AGREEMENT NAME:
2. NAME OF OPERATOR: KOCH EXPLORATION COMPANY LLC		8. WELL NAME and NUMBER: WH FED 118-35
3. ADDRESS OF OPERATOR: 9777 Pyramid Court Ste 210 , Englewood, CO, 80112		9. API NUMBER: 43047367500000
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1800 FNL 2164 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNE Section: 35 Township: 10.0S Range: 19.0E Meridian: S		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
		COUNTY: UINTAH
		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 2/15/2012	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input checked="" type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Koch Exploration Company, LLC (KEC) worked over the WHF 118-35 from 2-9-2012 through 2-15-2012 to cleanout rathole, reland tubing, and subsequently return the well to production. Note: the WHF 118-35 was first returned to production on 2-1-2012. The well had been shut-in since 06/2011. KEC tested the well for 9 days before the rig moved onto location to start the workover.

**Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
March 26, 2012**

NAME (PLEASE PRINT) Natalie Naeve	PHONE NUMBER 303 325-2565	TITLE Operations Engineer
SIGNATURE N/A	DATE 3/26/2012	

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-3405
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: WH FED 118-35	
2. NAME OF OPERATOR: KOCH EXPLORATION COMPANY LLC	9. API NUMBER: 43047367500000	
3. ADDRESS OF OPERATOR: 9777 Pyramid Court Ste 210 , Englewood, CO, 80112	PHONE NUMBER: 303 325-2562 Ext	9. FIELD and POOL or WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1800 FNL 2164 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNE Section: 35 Township: 10.0S Range: 19.0E Meridian: S	COUNTY: UINTAH	
		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 7/15/2014	<input type="checkbox"/> ALTER CASING	
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> CHANGE TUBING	
	<input type="checkbox"/> CHANGE WELL STATUS	
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	
	<input type="checkbox"/> DEEPEN	
	<input type="checkbox"/> FRACTURE TREAT	
	<input type="checkbox"/> OPERATOR CHANGE	
	<input type="checkbox"/> PLUG AND ABANDON	
	<input type="checkbox"/> PRODUCTION START OR RESUME	
	<input type="checkbox"/> RECLAMATION OF WELL SITE	
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	
	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	
	<input type="checkbox"/> TUBING REPAIR	
	<input type="checkbox"/> VENT OR FLARE	
	<input type="checkbox"/> WATER SHUTOFF	
	<input type="checkbox"/> SI TA STATUS EXTENSION	
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	
	<input checked="" type="checkbox"/> OTHER	
	OTHER: <input type="text" value="WB cleanout & biocide treatm"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.		
7/11/2014 - MIRUSU Kill well. Pull tbg 7/12/2014 - TIH w/ work string 7/13/2014 - Clean out hole with air/foam/mist and drill out hard stringers of scale/sulfide. 7/14/2014 - Tag below perfs @ 8126' (208' below btm perf = 196' fill in 2-years). Spot 50-gal biocide @ 8126'. 7/15/2014 - RIH w/ tbg & RTP.		
Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY October 09, 2014		
NAME (PLEASE PRINT) J. Darlene Tadlock	PHONE NUMBER 505 334-9111	TITLE E&P Technician
SIGNATURE N/A	DATE 10/2/2014	

