

*Enduring Resources*

475 17th Street Suite 1500 Denver Colorado 80202
Telephone 303 573-1222 Fax 303 573 0461

July 1, 2005

Utah Division of Oil, Gas and Mining
1594 West North Temple, Suite 1210
P. O. Box 145801
Salt Lake City, Utah 84114-5801

Attn.: Ms. Diana Whitney

RE: Archy Bench 11-24-24-32
SESW Sec 32 T11S-R24E
Uintah County, Utah

Dear Ms. Whitney:

Enclosed are two original applications to drill concerning the referenced proposed well. According to Enduring Resources' references, this acreage is managed by the School and Institutional Trust Lands Administration. Therefore, this information was also submitted to them.

Enduring Resources, LLC is requesting the Utah Division of Oil, Gas and Mining to hold this application and all future information as confidential.

If any questions arise or additional information is required, please contact me at 303-350-5114.

Sincerely,

Phyllis Sobotik
Regulatory Specialist

/ps

Enclosures:

xc: School and Institutional Trust Lands Administration
675 East 500 South, Suite 500
Salt Lake City, Utah 84102
Attn: Mr. Ed Bonner

RECEIVED

JUL 05 2005

DIV. OF OIL, GAS & MINING

001

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING



CONFIDENTIAL

FORM 3

AMENDED REPORT
(highlight changes)

APPLICATION FOR PERMIT TO DRILL

1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>		5. MINERAL LEASE NO: ML-49762	6. SURFACE: State
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input checked="" type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>		7. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A	
2. NAME OF OPERATOR: Enduring Resources, LLC		8. UNIT or CA AGREEMENT NAME: N/A	
3. ADDRESS OF OPERATOR: 475 17th St, Suite 1500 CITY Denver STATE CO ZIP 80202		PHONE NUMBER: (303) 350-5114	9. WELL NAME and NUMBER: Archy Bench 11-24-24-32
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 660' FSL 1780' FWL Sec 32 T11S R24E S.L.B.&M. AT PROPOSED PRODUCING ZONE: Same as above		10. FIELD AND POOL, OR WLD CAT: 11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESW 32 11S 24E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 26.3 miles southwesterly from Bonanza, Utah		12. COUNTY: Uintah	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 660'	16. NUMBER OF ACRES IN LEASE: 560	17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 40	
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) 3057.70'	19. PROPOSED DEPTH: 6,040	20. BOND DESCRIPTION: RLB0008031	
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 5981.0' GR Ungraded	22. APPROXIMATE DATE WORK WILL START: 10/15/2005	23. ESTIMATED DURATION: 20 days	

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT	SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT
12-1/4"	8-5/8" J-55 24#	2,000	65/35 Poz 462 sx 1.81 12.6 ppg
			Prem 236 sx 1.18 15.6 ppg
7-7/8"	4-1/2" N-80/I-80 11.6#	6,040	Prem Lite II 291 sx 3.38 11.0 ppg
			50/50 Poz CI G 948 sx 1.31 14.3 ppg

ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:

- | | |
|--|--|
| <input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER | <input checked="" type="checkbox"/> COMPLETE DRILLING PLAN |
| <input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER | <input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER |

NAME (PLEASE PRINT) Phyllis Sobotik TITLE Regulatory Specialist

SIGNATURE *Phyllis Sobotik* DATE July 1, 2005

RECEIVED

JUL 05 2005

(This space for State use only)

API NUMBER ASSIGNED: 43-047-36819

APPROVAL:

DIV. OF OIL, GAS & MINING

**Enduring Resources, LLC
Archy Bench #11-24-24-32
SESW Sec. 32 T11S-R24E
Uintah County, Utah
Lease # ML-49762**

Directions to Location

Directions to the proposed location are as follows:

Beginning at the town of Bonanza, Utah, proceed south on State Hwy 45 for a distance of approximately 3.7 miles to the Baxter Pass Road (still on SH 45). Turn left onto the dirt road and continue southeasterly for approximately 5.7 miles to the Greek Corrals. Turn right onto the Watson road and continue in a southwesterly direction for approximately 6.8 miles to the Rainbow Road junction. Stay right on the King's Well Road (Class B County Road #4190) traveling in a southwesterly direction for approximately 8.7 miles (go approximately 1.5 miles past the King's Well to the corrals on the right). Turn right (north) onto a Class D County Road (Oil Springs Gas Field Road) and proceed for approximately 1.2 miles. Turn right and travel southeasterly approximately 890 feet (0.2 miles) along the proposed access road to the proposed Archy Bench #11-24-24-32 well pad.

The proposed well site is located approximately 26.3 miles Southwesterly from Bonanza, Utah.

**Enduring Resources, LLC
Archy Bench 11-24-24-32
SESW Sec. 32 T11S-R24E
Uintah County, Utah
Lease # ML-49762**

ONSHORE ORDER 1 - DRILLING PLAN

1. Estimated Tops of Geological Markers:

<u>Formation</u>	<u>Depth</u>
Uinta	Surface
Green River	701'
Wasatch	2581'
Mesaverde	4033'

2. Estimated Depths of Anticipated Water, Oil, Gas or Other Minerals: (5990.1' estimated KB)

Substance	Formation	Depth
	Uinta	Surface
Oil / Gas	Green River	701'
Oil / Gas	Wasatch	2581'
Oil / Gas	Mesaverde	4033'
	Estimated TD	6040'

A 12-1/4" hole will be drilled to approximately 2000 feet. The depth will be determined by the depth that the Birds Nest zone is encountered. The hole will be drilled 400 feet beyond the top of the Birds Nest zone and surface casing will be set.

3. Pressure Control Equipment: (3000 psi schematic attached)

A. Type: Eleven (11) inch double gate hydraulic BOP with eleven (11) inch annular preventer with 3,000 psi Casinghead and 3,000 psi Tubinghead equipped per the attached diagrams for 3,000 psi. BOPE as specified in *Onshore Oil & Gas Order Number 2*. A PVT, Stroke Counter and flow sensor will be installed to check for flow and monitor pit volume.

B. Pressure Rating: 3,000 psi BOPE

C. Kelly will be equipped with upper and lower Kelly valves.

D. Testing Procedure: Annular Preventer

At a minimum, the annular preventer will be pressure tested to 50% of the stack rated working pressure for a period of ten (10) minutes or until provisions of the test are met, whichever is longer.

At a minimum, the above pressure test will be performed:

1. When the annular preventer is initially installed;
2. Whenever any seal subject to test pressure is broken;
3. Following related repairs; and
4. At thirty (30) day intervals.

In addition to the above, the annular preventer will be functionally operated at least weekly.

Blow-Out Preventer

At a minimum, the BOP, choke manifold, and related equipment will be pressure tested to the approved working pressure of the BOP stack (if isolated from the surface casing by a test plug) or to 70% of the internal yield strength of the surface casing (if the BOP is not isolated from the casing by a test plug). Pressure will be maintained for a period of at least ten (10) minutes or until the requirements of the test are met, whichever is longer.

At a minimum, the above pressure test will be performed:

1. When the BOP is initially installed;
2. Whenever any seal subject to test pressure is broken;
3. Following related repairs; and
4. At thirty (30) day intervals.

In addition to the above, the pipe and blind rams will be activated each trip, but not more than once each day. All BOP drills and tests will be recorded in the IADC driller's log.

D. Miscellaneous Information:

The blowout preventer and related pressure control equipment will be installed, tested and maintained in compliance with the specifications in and requirements of *Onshore Oil & Gas Order Number 2*.

Totco directional surveys will be dropped every 2000 feet. Maximum allowable angle is 5 degrees.

4. Proposed Casing & Cementing Program:**A. Casing Program: All New**

Hole Size	Casing Size	Wt./Ft.	Grade	Joint	Depth Set (md)
20"	16"				40'
12-1/4"	8-5/8"	24#	J-55	ST&C	0 – 2,000' est
7-7/8"	4-1/2"	11.6#	N-80/I-80	LT&C	0 – 6040'

The surface casing will have guide shoe, 1 jt., insert float collar. Centralize the first 3 joints with bowspring centralizers. Thread lock guide shoe.

Casing string(s) will be pressure tested to 0.22 psi/foot of casing string length or 1500 psi, whichever is greater (not to exceed 70% of the internal yield strength of the casing), after cementing and prior to drilling out from under the casing shoe.

B. Casing Design Parameters:

Depth (md)	Casing	Collapse(psi)/SF	Burst (psi)/SF	Tension(mlbs)/SF
40	16"			
2000	8-5/8", 24#/ft, J55, STC	1370/1.53(a)	4460/4.98(b)	244/5.08(c)
6040	4-1/2", 11.6#/ft, N-80, LTC	6350/2.04 (d)	7780/2.71 (e)	223/3.70 (f)

(a.) based on full evacuation with 8.6 ppg fluid on annulus

(b.) based on 8.6 ppg gradient with no fluid on annulus

(c.) based on casing string weight in 8.6 ppg mud

(d.) based on full evacuation with 10.0 ppg fluid on annulus, pipe evacuated

(e.) based on 9.2 ppg gradient, gas to surface, with no fluid on annulus, no gas gradient.

(f.) based on casing string weight in 9.2 ppg mud

PROPOSED CEMENTING PROGRAM

Surface Casing (if well will circulate)-Cemented to surface

CASING	SLURRY	FT. of FILL	CEMENT TYPE	SXS	EXCESS (%)	WEIGHT (ppg)	YIELD (ft ³ /sx)
8-5/8"	Lead	1500	65/35 POZ +6% Gel +10 pps gilsonite + .25 pps Flocele + 3% salt BWOW	462	35%	12.6	1.81
8-5/8"	Tail	500	Premium cmt +2% CaCl +.25 pps flocele	236	35%	15.6	1.18

A cement top job is required if cement fallback is greater than 10' below ground level. Top job cement will be premium cement w/2% CaCl. Volume as required.

Surface Casing (if well will not circulate)-Cemented to surface

CASING	SLURRY	FT. of FILL	CEMENT TYPE	SXS	EXCESS (%)	WEIGHT (ppg)	YIELD (ft ³ /sx)
8-5/8"	Lead	500	Premium cmt + 2% CaCl +.25 pps flocele	280	60	15.6	1.18
8-5/8"	Top job	As req.	Premium cement + 2% CaCl	Req.		15.6	1.18

Production Casing and Liner-Cemented TD to Surface

CASING	SLURRY	FT. of FILL	CEMENT TYPE	SXS	EXCESS (%)	WEIGHT (ppg)	YIELD (ft ³ /sx)
4-1/2"	Lead	2540	Premium Lite II +3% KCL +0.25 pps celloflake +5 pps gilsonite +10% gel +0.5% extender	291	60	11.0	3.38
4-1/2"	Tail	3500	50/50 POZ Class G +10% salt + 2% gel + 1% R-3	948	60	14.3	1.31

Cement volumes for the 4-1/2" Production Casing will be calculated to provide a top of cement to surface. Cement volumes are approximate and were calculated under the assumption that a gauge hole will be achieved. Actual cement volumes may vary due to variations in the actual hole size and will be determined by running a caliper log on the drilled hole.

All waiting on cement (WOC) times will be adequate to achieve a minimum of 500 psi compressive strength at the casing shoe prior to drilling out.

5. Drilling Fluids (mud) Program:

Interval	Mud Weight	Fluid Loss	Viscosity	Mud Type
0' - 2000'		No cntrl		Air/mist
2000'-3000'	8.4-8.6	No cntrl	28-36	Water
3000'-6040'	8.8-10.2	8 - 10 ml	32-42	Water/Gel

Sufficient mud material(s) to maintain mud properties, control lost circulation and contain a blowout will be available at the well site during drilling operations.

6. Evaluation Program:

Tests: No tests are currently planned.

Coring: No cores are currently planned.

Samples: None

Logging: Dual Induction – SFL /Gamma Ray Caliper: TD to Base Surface Casing
 Compensated Neutron/Litho Density Temperature/Gamma Ray: TD to Base Surface Casing
 Cement Bond Log / Gamma Ray: PBTD to Top of Cement

Stimulation: A stimulation or frac treatment will be designed for completion of this well based on openhole log analysis. The drill site, as approved, will be sufficient size to accommodate all completion activities.

7. Abnormal Conditions:

No abnormal temperatures or pressures are anticipated. No H₂S has been encountered or known to exist from previous wells drilled to similar depths in the general area.

Maximum anticipated bottom hole pressure equals approximately 3141 psi (calculated at 0.52 max psi/foot of hole) and maximum anticipated surface pressure equals approximately 1812 psi (anticipated bottom hole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot of hole).

8. Anticipated Starting Dates:

Anticipated Commencement Date- October 15, 2005
 Drilling Days- Approximately 10 days
 Completion Days - Approximately 10 days
 Anticipate location construction within 30 days of permit issue.

9. Variations:



None anticipated

10. Other:

A Cultural Resource Inventory and Paleontology reconnaissance shall be conducted for the well location, access route and pipeline. The reports shall be submitted to the Division of Oil, Gas and Mining and to the School and Institutional Trust Lands Administration upon their receipt.

3,000 PSI

BOP STACK

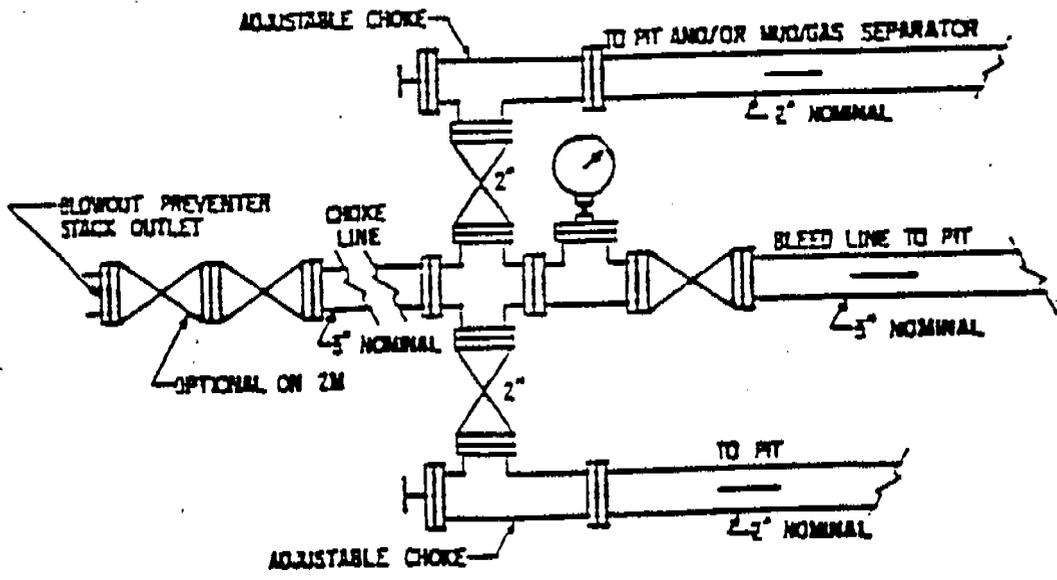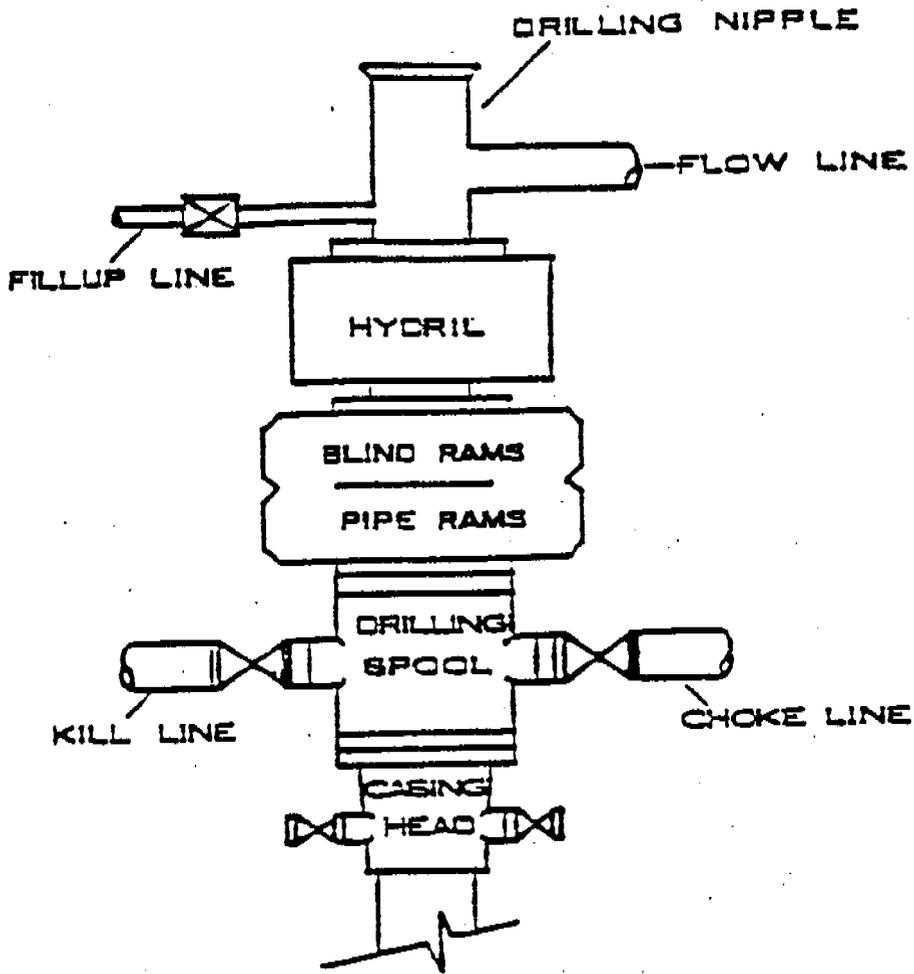

**Enduring Resources, LLC
Archy Bench 11-24-24-32
SESW Sec. 32 T11S-R24E
Uintah County, Utah
Lease # ML-49762**

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. Existing Roads:

Directions to the proposed location are as follows:

Beginning at the town of Bonanza, Utah, proceed south on State Hwy 45 for a distance of approximately 3.7 miles to the Baxter Pass Road (still on SH 45). Turn left onto the dirt road and continue southeasterly for approximately 5.7 miles to the Greek Corrals. Turn right onto the Watson road and continue in a southwesterly direction for approximately 6.8 miles to the Rainbow Road junction. Stay right on the King's Well Road (Class B County Road #4190) traveling in a southwesterly direction for approximately 8.7 miles (go approximately 1.5 miles past the King's Well to the corrals on the right). Turn right (north) onto a Class D County Road (Oil Springs Gas Field Road) and proceed for approximately 1.2 miles. Turn right and travel southeasterly approximately 890 feet (0.2 miles) along the proposed access road to the proposed Archy Bench #11-24-24-32 well pad.

The proposed well site is located approximately 26.3 miles Southwesterly from Bonanza, Utah. Refer to attached Topographic Map "A" and "B"

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

2. Planned Access Roads:

The proposed access road will be approximately 890 feet (0.2 miles) of new construction entering the location from the Class D County road. The proposed access road utilizes approximately 1.2 miles of an existing Class D County road requiring no new construction or upgrades. Please refer to Topo Map "B".

The access road will be crowned 2% to 3%, ditched and constructed with a running surface of 18 feet and a maximum disturbed width of 30 feet right-of-way. Maximum grade of road is 5% or less. Graveling or capping the roadbed will be performed as necessary to provide a well constructed, safe road. No fence crossings, culverts, turnouts, cattleguards or major cuts and fills are expected to be required. Prior to construction or upgrading, the proposed road shall be cleared of any snow and allowed to dry completely.

Surface disturbance and vehicular traffic will be limited to the proposed location and proposed access route. Any additional area needed will be approved in advance. All construction shall be in conformance with the standards outlined in the BLM and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development. 1989.

The road surface and shoulders will be kept in a safe usable condition and will be maintained in accordance with the original construction standards. All drainage ditches will be kept clear and free flowing and will be maintained according to original construction standards. The access road surface will be kept free of trash during operations. All traffic will be confined to the approved disturbed surface. Road drainage crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing nor shall the drainages be blocked by the road bed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided. When snow is removed from the road during the winter months, the snow shall be pushed outside of the borrow ditches and the turnouts kept clear so that snowmelt will be channeled away from the road.

3. **Location of Existing Wells Within a One Mile Radius:** Please refer to Topographic Map "C"

There are no known temporarily abandoned wells, water wells, disposal wells, monitoring or observation wells, or injection wells located within a one (1) mile radius of the proposed location.

There are two known producing wells – Oil Springs Unit 5 NESW Sec 5 T12S-R24E
- Oil Springs Unit 10 NENE Sec 5 T12S-R24E

There is one known shut in wells – Oil Springs 12 SWNW Sec 5 T12S-R24E

There is one known plugged and abandoned wells – Hanging Rock Fed E 31-11 NESW Sec 31 T11S-R24E

There may be drilling activity or permitted wells within in the area.

4. **Location of Existing &/or Proposed Facilities:**

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain fluids (i.e. production tanks, produced water tanks and/or heater treater.) These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank and be independent of the back cut.

All permanent (on site for six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Inter-Agency Committee.

All facilities will be painted within 6 months of installation. The color shall be Carlsbad Canyon (2.5Y 6/2). Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

If the well is capable of economic production, a surface gas gathering line and related equipment shall be installed. The gas gathering line shall be in use year round. A total of approximately 7,100 feet (1.34 miles) of 6 inch or less diameter steel, unpainted, welded gas gathering line is proposed to be laid. Approximately 1,980 feet (0.34 miles) is proposed to be laid on state acreage; approximately 5,120 feet (1.0 miles) is proposed to be laid on BLM acreage. The proposed line shall begin at the well site being laid alongside the access road, continue in a northwesterly direction turning southwesterly then southerly to tie into an existing pipeline located in Sec. 5 T12S-R24E. The proposed gathering line shall be placed above ground alongside the access road (Class D County Road). The line will be welded together and pulled from the well site location and tie-in point when practical; however, it may be necessary to utilize the access road for welding of the line. The line will then be boomed off to the side of the road. The gas meter run will be located within 500 feet of the wellhead. The meter run will be housed. The gas gathering line will be buried or anchored down from the wellhead to the meter. Please refer to the attached Topographic Map "D".

Upon plugging and abandonment, the gas gathering line will be removed and the disturbed area will be re-contoured and restored as near as practical to the original condition. If necessary, re-seeding operations will be performed after completion of other reclamation operations. The appropriate surface management agency will be contacted for the required seed mixture and seeding dates.

5. **Location and Type of Water Supply:**

Water will be obtained from the White River by Tu and Frum, Inc. Water User Claim #49-2185, Application #T75517, or by Target Trucking Water User Claim #43-2195, or by Dalbo Inc. Water User Claim #43-8496.

Water will be hauled to the location over the roads marked on Topographic Maps "A" and "B".

No water well is to be drilled on this lease.

6. Source of Construction Materials:

Surface and subsoil materials in the immediate area will be utilized for location and access road construction.

Any gravel will be obtained from a commercial source; however, gravel sized rock debris associated with location and access road construction may be used as access road surfacing material.

7. Methods of Handling Waste Materials:

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break or allow discharge of liquids.

A plastic reinforced liner is to be used. It will be a minimum of 12 mil thick and felt with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, salt water or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical portable toilet will be furnished with the drilling rig. The toilet will be replaced periodically utilizing a licensed contractor to transport by truck the portable chemical toilet so that its contents can be delivered to the Vernal Wastewater Treatment Facility in accordance with state and county regulations.

Garbage, trash and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported or disposed of annually in association with the drilling, completion or testing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported or disposed of in association with the drilling, completion or testing of this well.

Produced oil will be stored in an oil tank and then hauled by truck to a crude purchaser facility. Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to an approved disposal site.

8. Ancillary Facilities:

During drilling operations, approximately 20 days, the site will be a manned camp. Three or four additional trailers will be on location to serve as the crew's housing and eating facility. These will be located on the perimeter of the pad site within the topsoil stockpiles. Refer to Sheet #5.

9. Well Site Layout: (Refer to Sheet #3, #4 & #5)

The attached Location Layout Diagrams describes drill pad cross-sections, cuts and fills and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s) and surface material stockpiles(s).

Please see the attached diagram for rig orientation and access roads.

All pits shall be fenced to the following minimum standards:

39 inch net wire shall be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

The net wire shall be no more than 2 inches above the ground. The barbed wire shall be 3 inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two fence posts shall be no greater than 16 feet.

All wire shall be stretched by, using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Location size may change prior to drilling the well due to the current rig availability. If the proposed location is not large enough to accommodate the drilling rig, the location will be re-surveyed and a Form 9 will be submitted.

10. Plans for Surface Reclamation:**Producing Location:**

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, materials, trash and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 40 CFR 3162.7.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be re-contoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water(s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface 3 feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling and re-contouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites or other applicable facilities.

Dry Hole / Abandoned Location:

Abandoned well sites, roads and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions and re-establishment of vegetation as specified.

All disturbed surfaces will be re-contoured to the approximate natural contours with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. If necessary, re-seeding operations will be performed after completion of other reclamation operations.

Seed Mixture:

The appropriate surface management agency will be contacted for the required seed mixture and seeding dates.

11. Surface Ownership: Location, Access Road & Pipeline

School and Institutional Trust Lands Administration
675 East 500 South, Suite 500
Salt Lake City, Utah 84102
Attn: Mr. Ed Bonner

12. Other Information:


Wildlife Stipulations: Wildlife stipulations and possible activity restrictions will be detailed in the "Conditions of Approval" received with an approved Permit to Drill. Operator will comply with these wildlife stipulations.

Archeology: A Cultural Resource Inventory shall be conducted for the well location, access route and pipeline. The report shall be submitted to the Division of Oil, Gas and Mining and the School and Institutional Trust Lands Administration upon its receipt.

Paleontology: A Paleontology reconnaissance shall be conducted for the well location, access route and pipeline. The report shall be submitted to the Division of Oil, Gas and Mining and the School and Institutional Trust Lands Administration upon its receipt.

If, during operations, any archaeological or historical sites, or any objects of antiquity (subject to the Antiquities Act of June 8, 1906) are discovered, all operations which would affect such sites will be suspended and the discovery reported promptly to the surface management agency.

All lease operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations and any applicable Notice to Lessees. The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

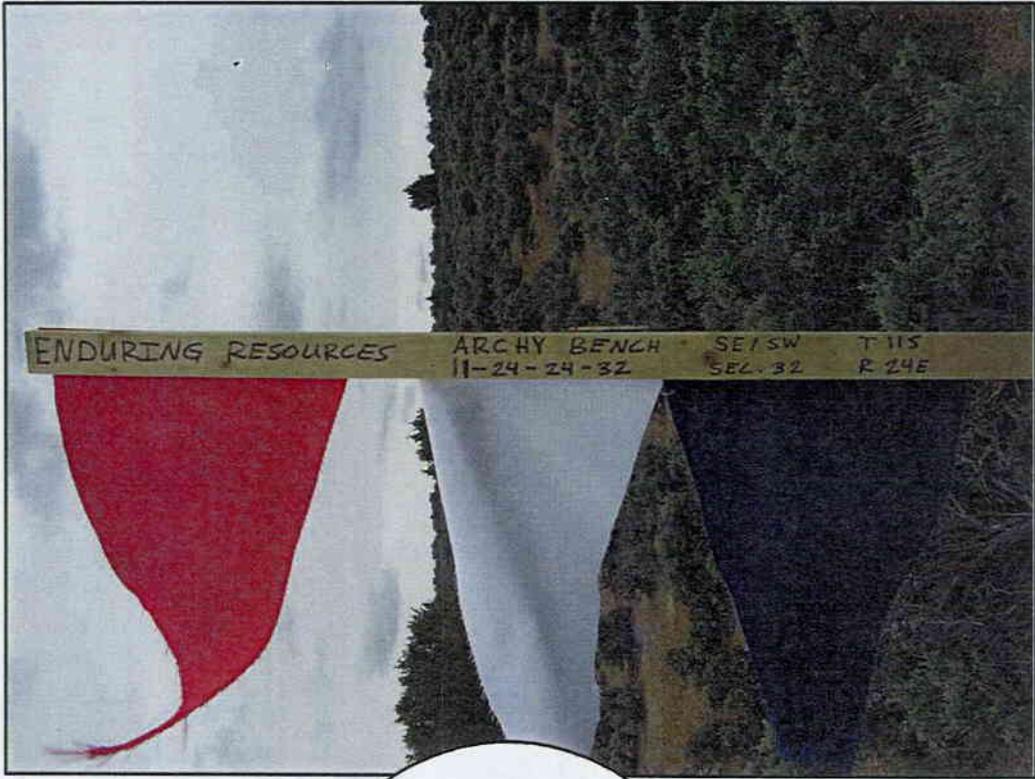


ENDURING RESOURCES
A.B. 11-24-24-32


Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078



NORTH


ENDURING RESOURCES
A.B. 11-24-24-32

Date Photographed: 05/17/2005
Date Drawn: 05/24/2005
Drawn By: mw


*Tri-State
Land Surveying Inc.*
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

EAST






SOUTH


ENDURING RESOURCES
A.B. 11-24-24-32

Date Photographed: 05/17/2005
Date Drawn: 05/24/2005
Drawn By: mw



Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

WEST

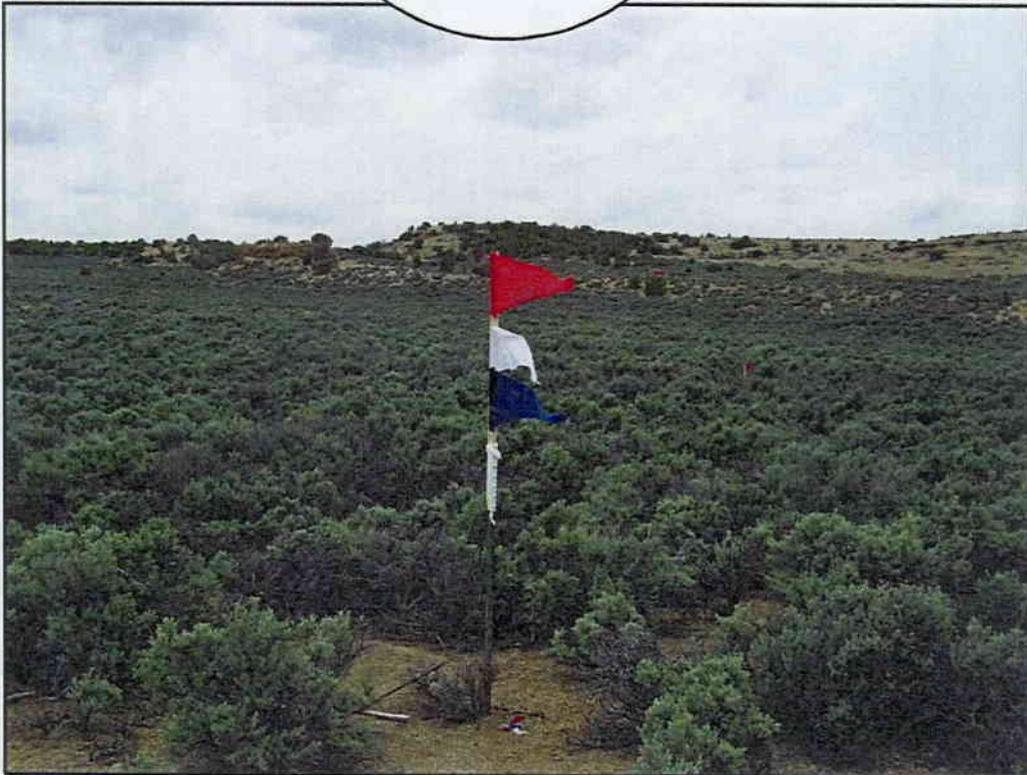

ENDURING RESOURCES

ARCHY BENCH 11-24-24-32
Section 32, T11S, R24E, S.L.B.&M.

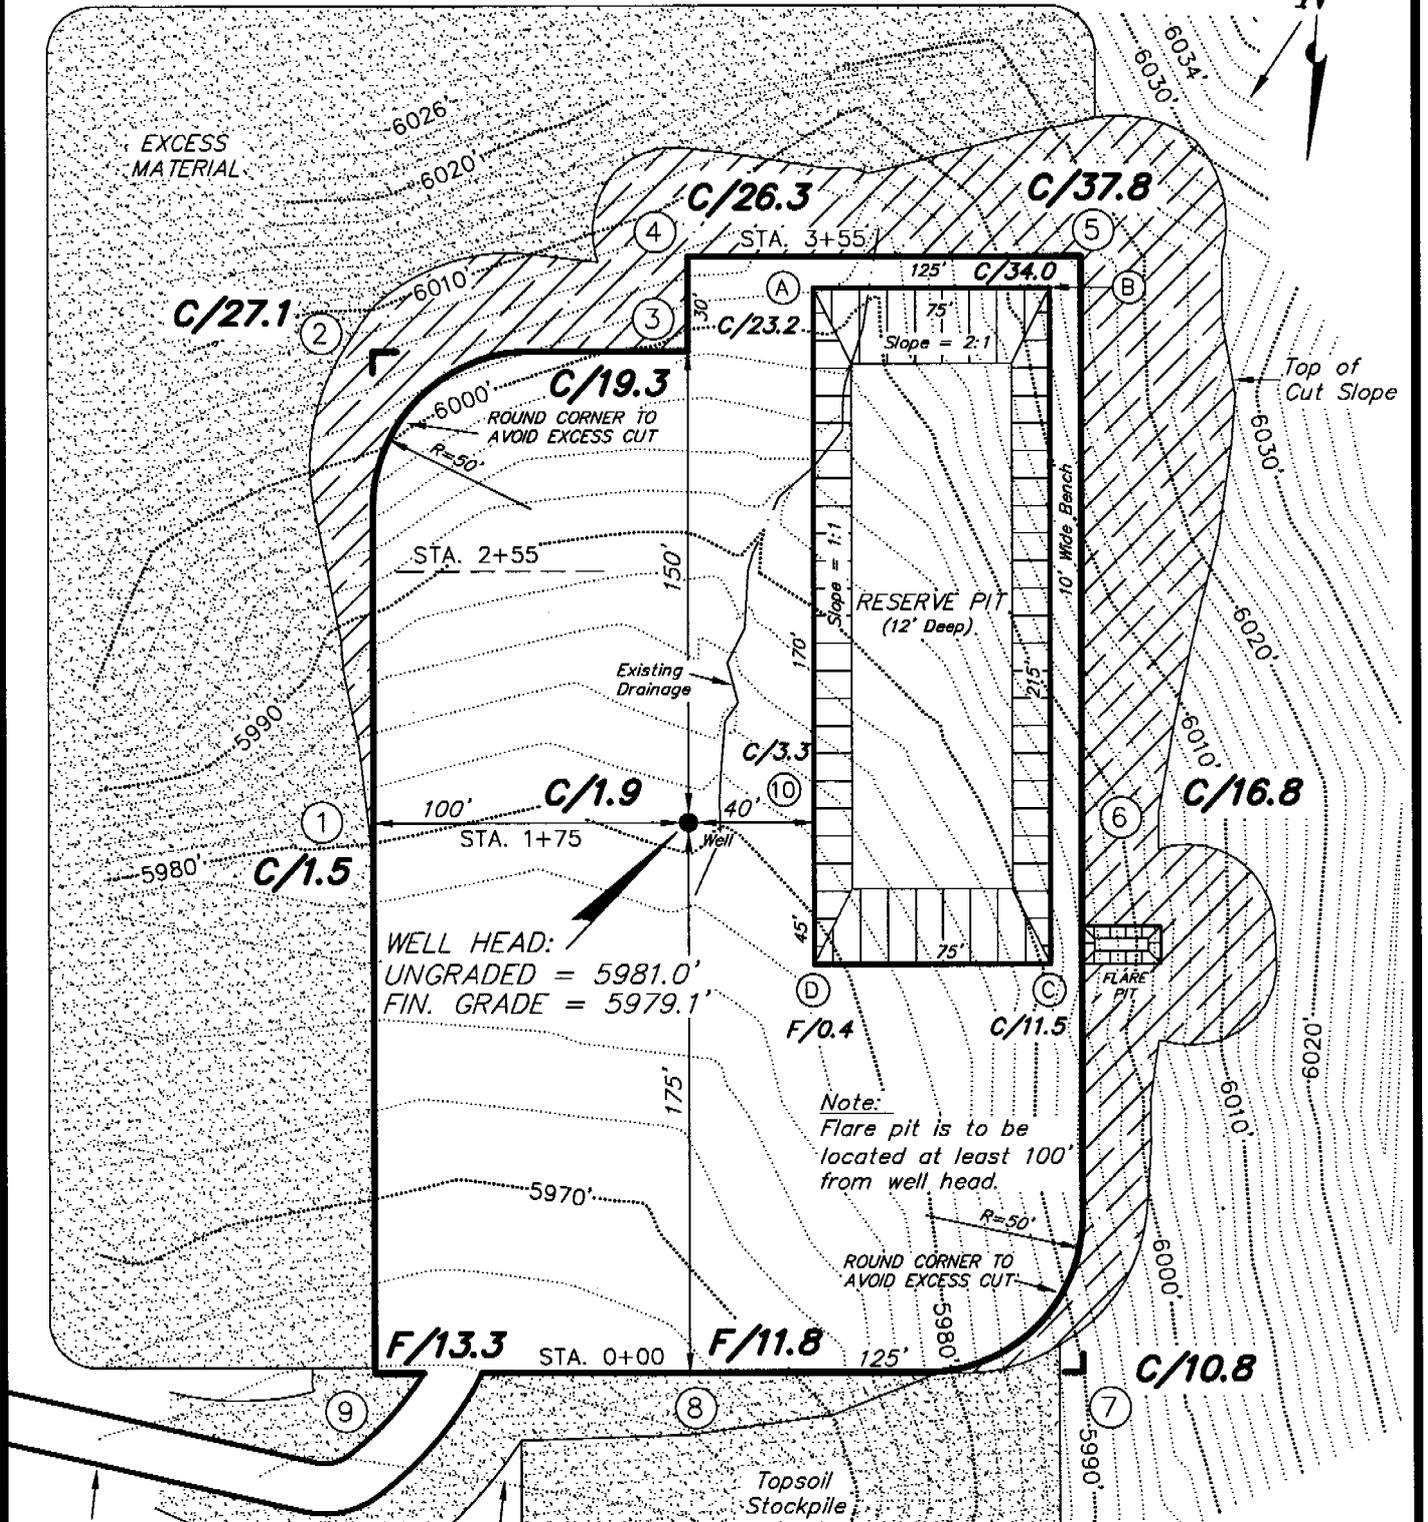

WELL HEAD:
UNGRADED = 5981.0'
FIN. GRADE = 5979.1'

Note:
Flare pit is to be
located at least 100'
from well head.

REFERENCE POINTS
225' NORTHERLY = 5963.7'
275' NORTHERLY = 5961.0'

SURVEYED BY: C.M.	DATE DRAWN: 5-5-05
DRAWN BY: F.T.M.	SCALE: 1" = 60'
NOTES:	





Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078
(435) 781-2501

SHEET
3
OF 9

ENDURING RESOURCES

CROSS SECTIONS

ARCHY BENCH 11-24-24-32

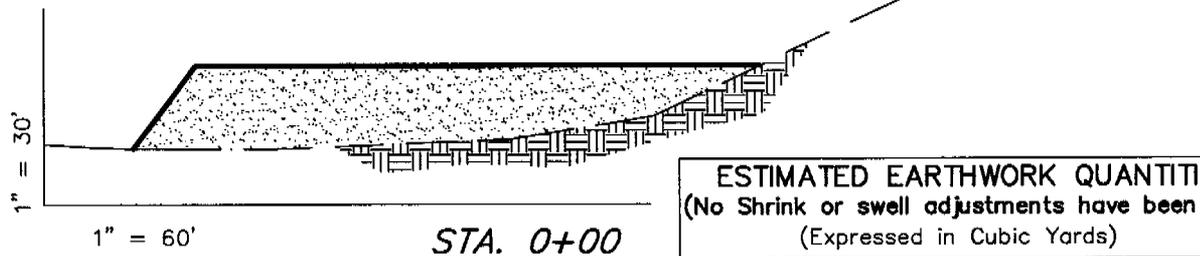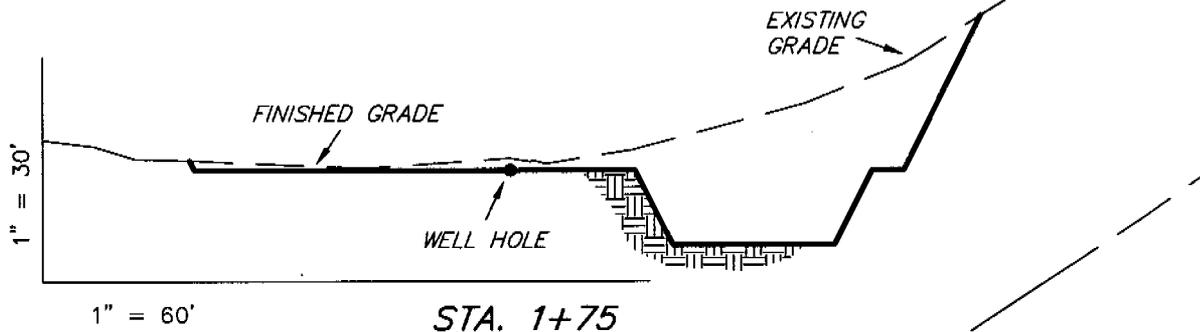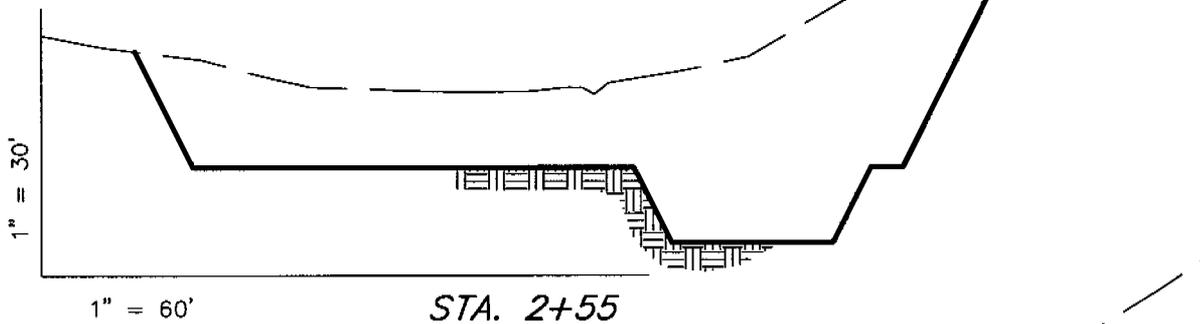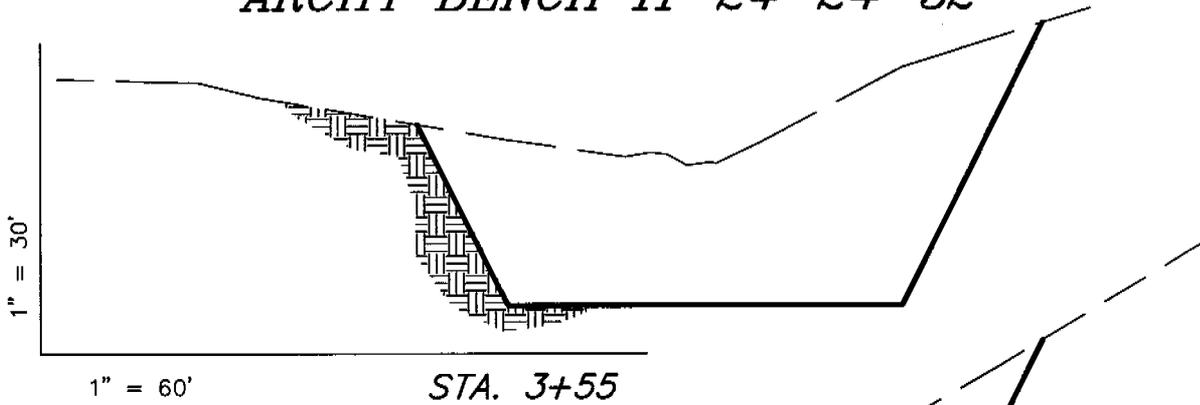

ESTIMATED EARTHWORK QUANTITIES
(No Shrink or swell adjustments have been used)
(Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	32,020	7,270	Topsail is not included in Pad Cut	24,750
PIT	5,390	0		5,390
TOTALS	37,410	7,270	1,960	30,140


NOTE:
UNLESS OTHERWISE NOTED
CUT SLOPES ARE AT 1:1
FILL SLOPES ARE AT 1.5:1

SURVEYED BY: C.M. DATE DRAWN: 5-5-05
DRAWN BY: F.T.M. SCALE: 1" = 60'
NOTES:

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078 (435) 781-2501

SHEET
4
OF 9

ENDURING RESOURCES
TYPICAL RIG LAYOUT
ARCHY BENCH 11-24-24-32

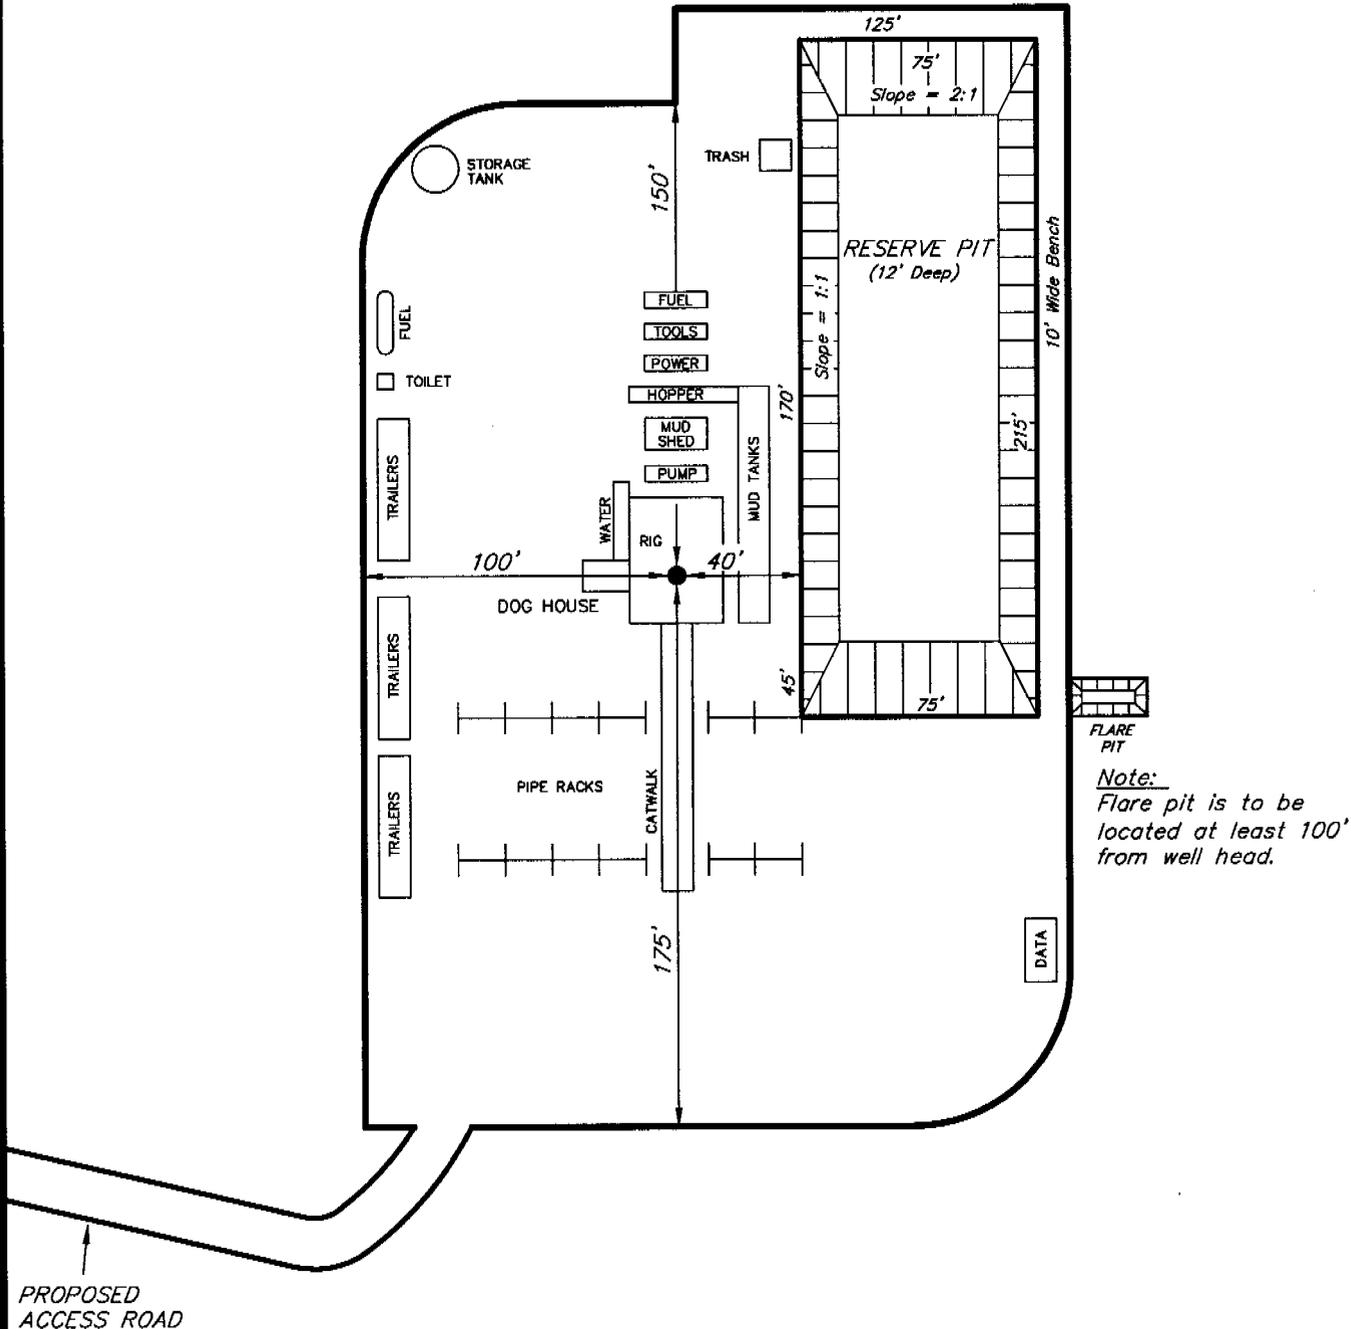


FLARE PIT
Note:
 Flare pit is to be located at least 100' from well head.

SURVEYED BY: C.M.	DATE DRAWN: 5-5-05
DRAWN BY: F.T.M.	SCALE: 1" = 60'
NOTES:	

Tri State
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

(435) 781-2501

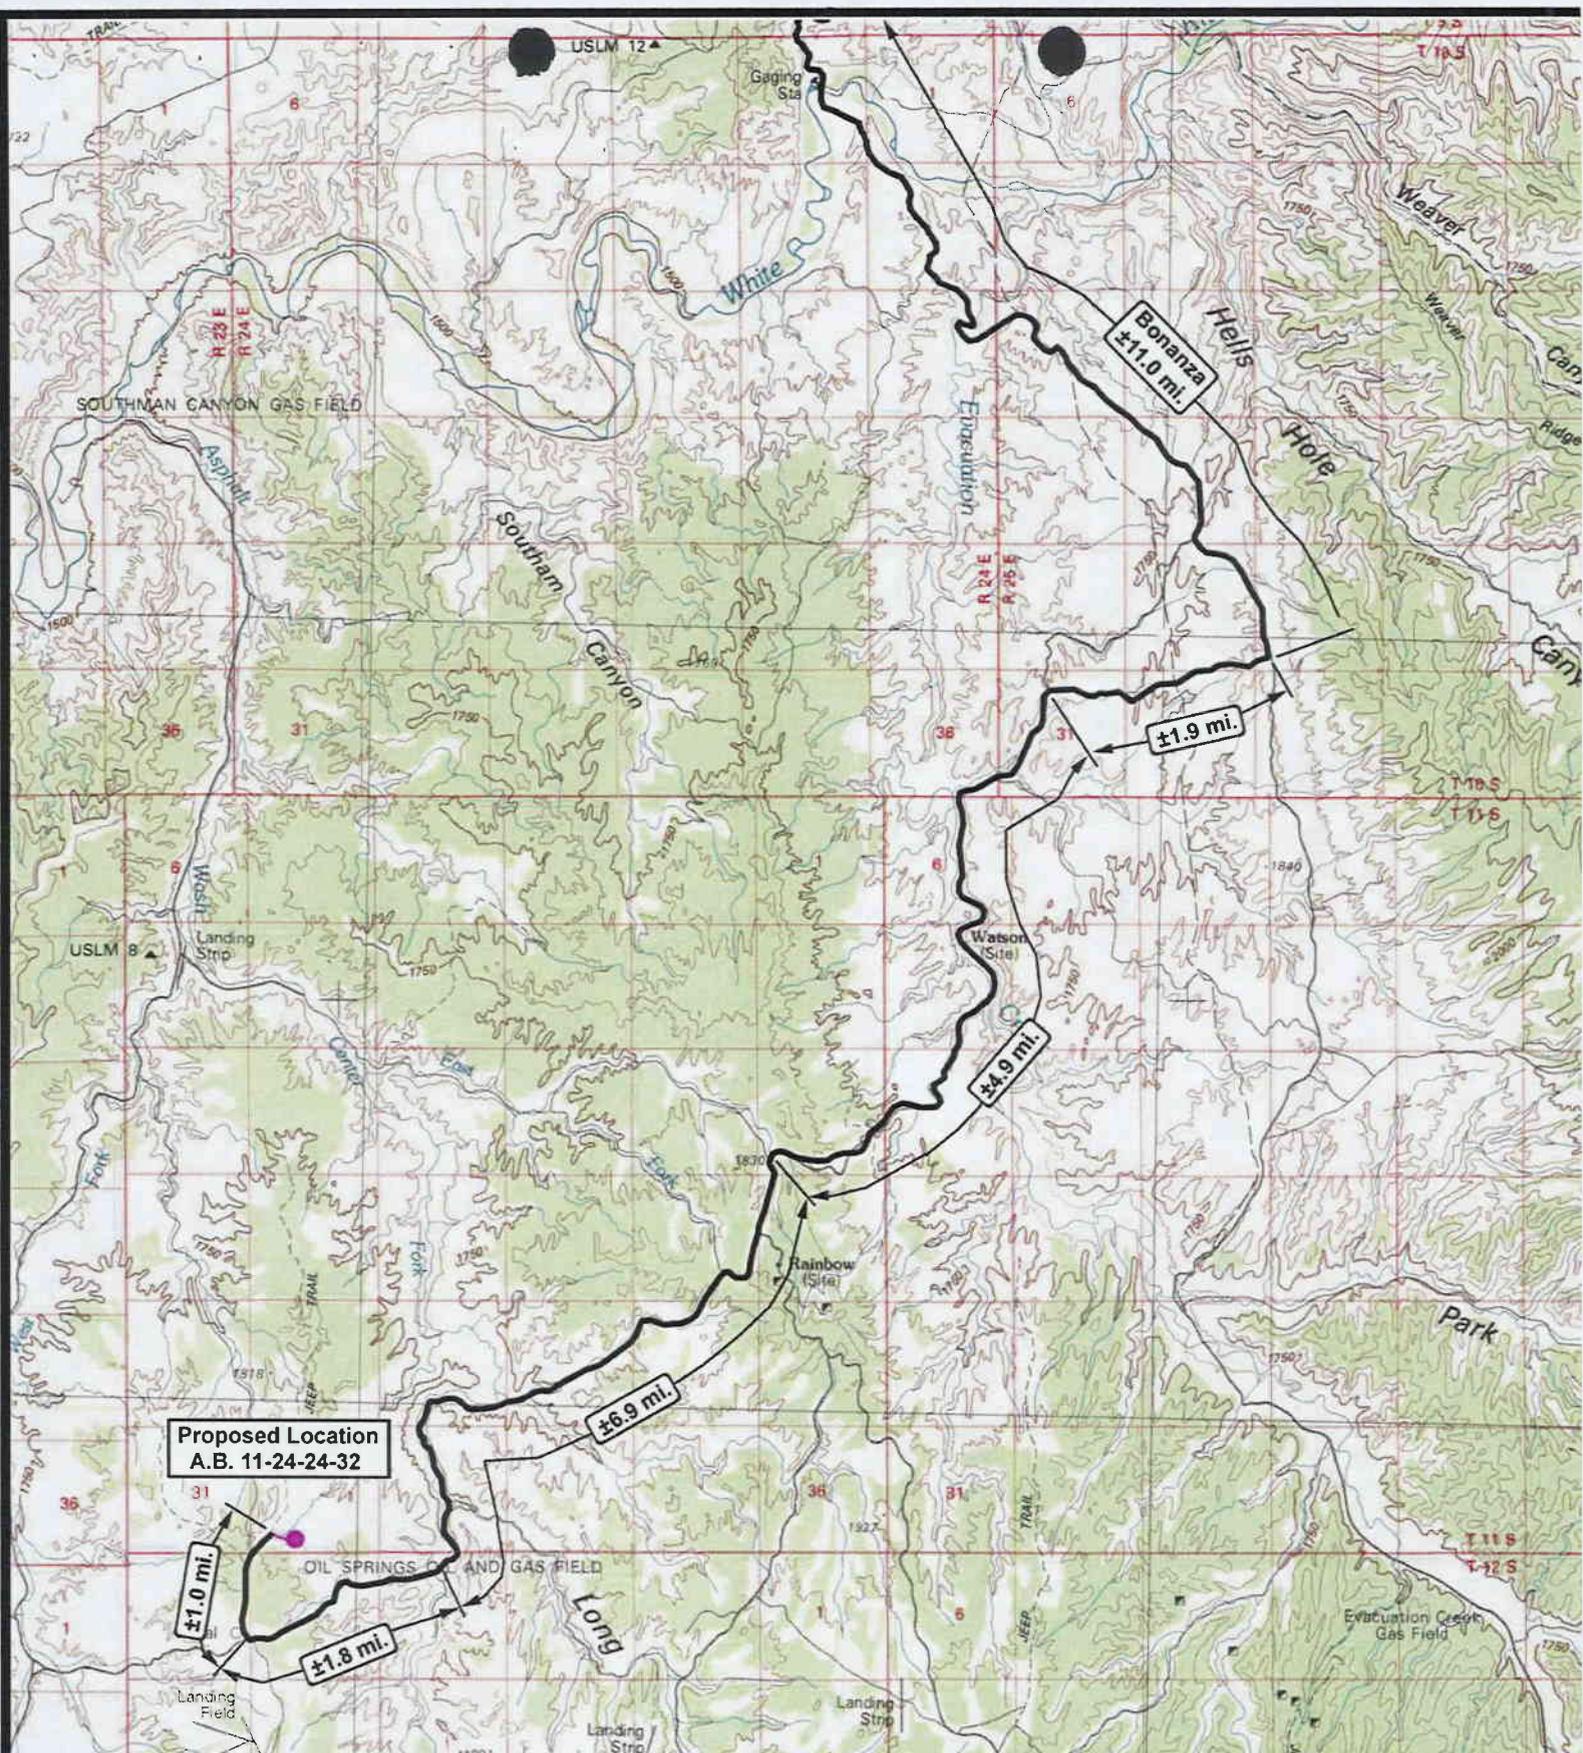



ENDURING RESOURCES
 Archy Bench 11-24-24-32
 Sec. 32, T11S, R24E, S.L.B.&M.




Tri-State
Land Surveying Inc.
 (435) 781-2501
 180 North Vernal Ave. Vernal, Utah 84078
 SCALE: 1" = 100,000'
 DRAWN BY: mw
 DATE: 06-29-2005

Legend
 Existing Road
 Proposed Access
TOPOGRAPHIC MAP
"A"
SHEET
6
 OF 9

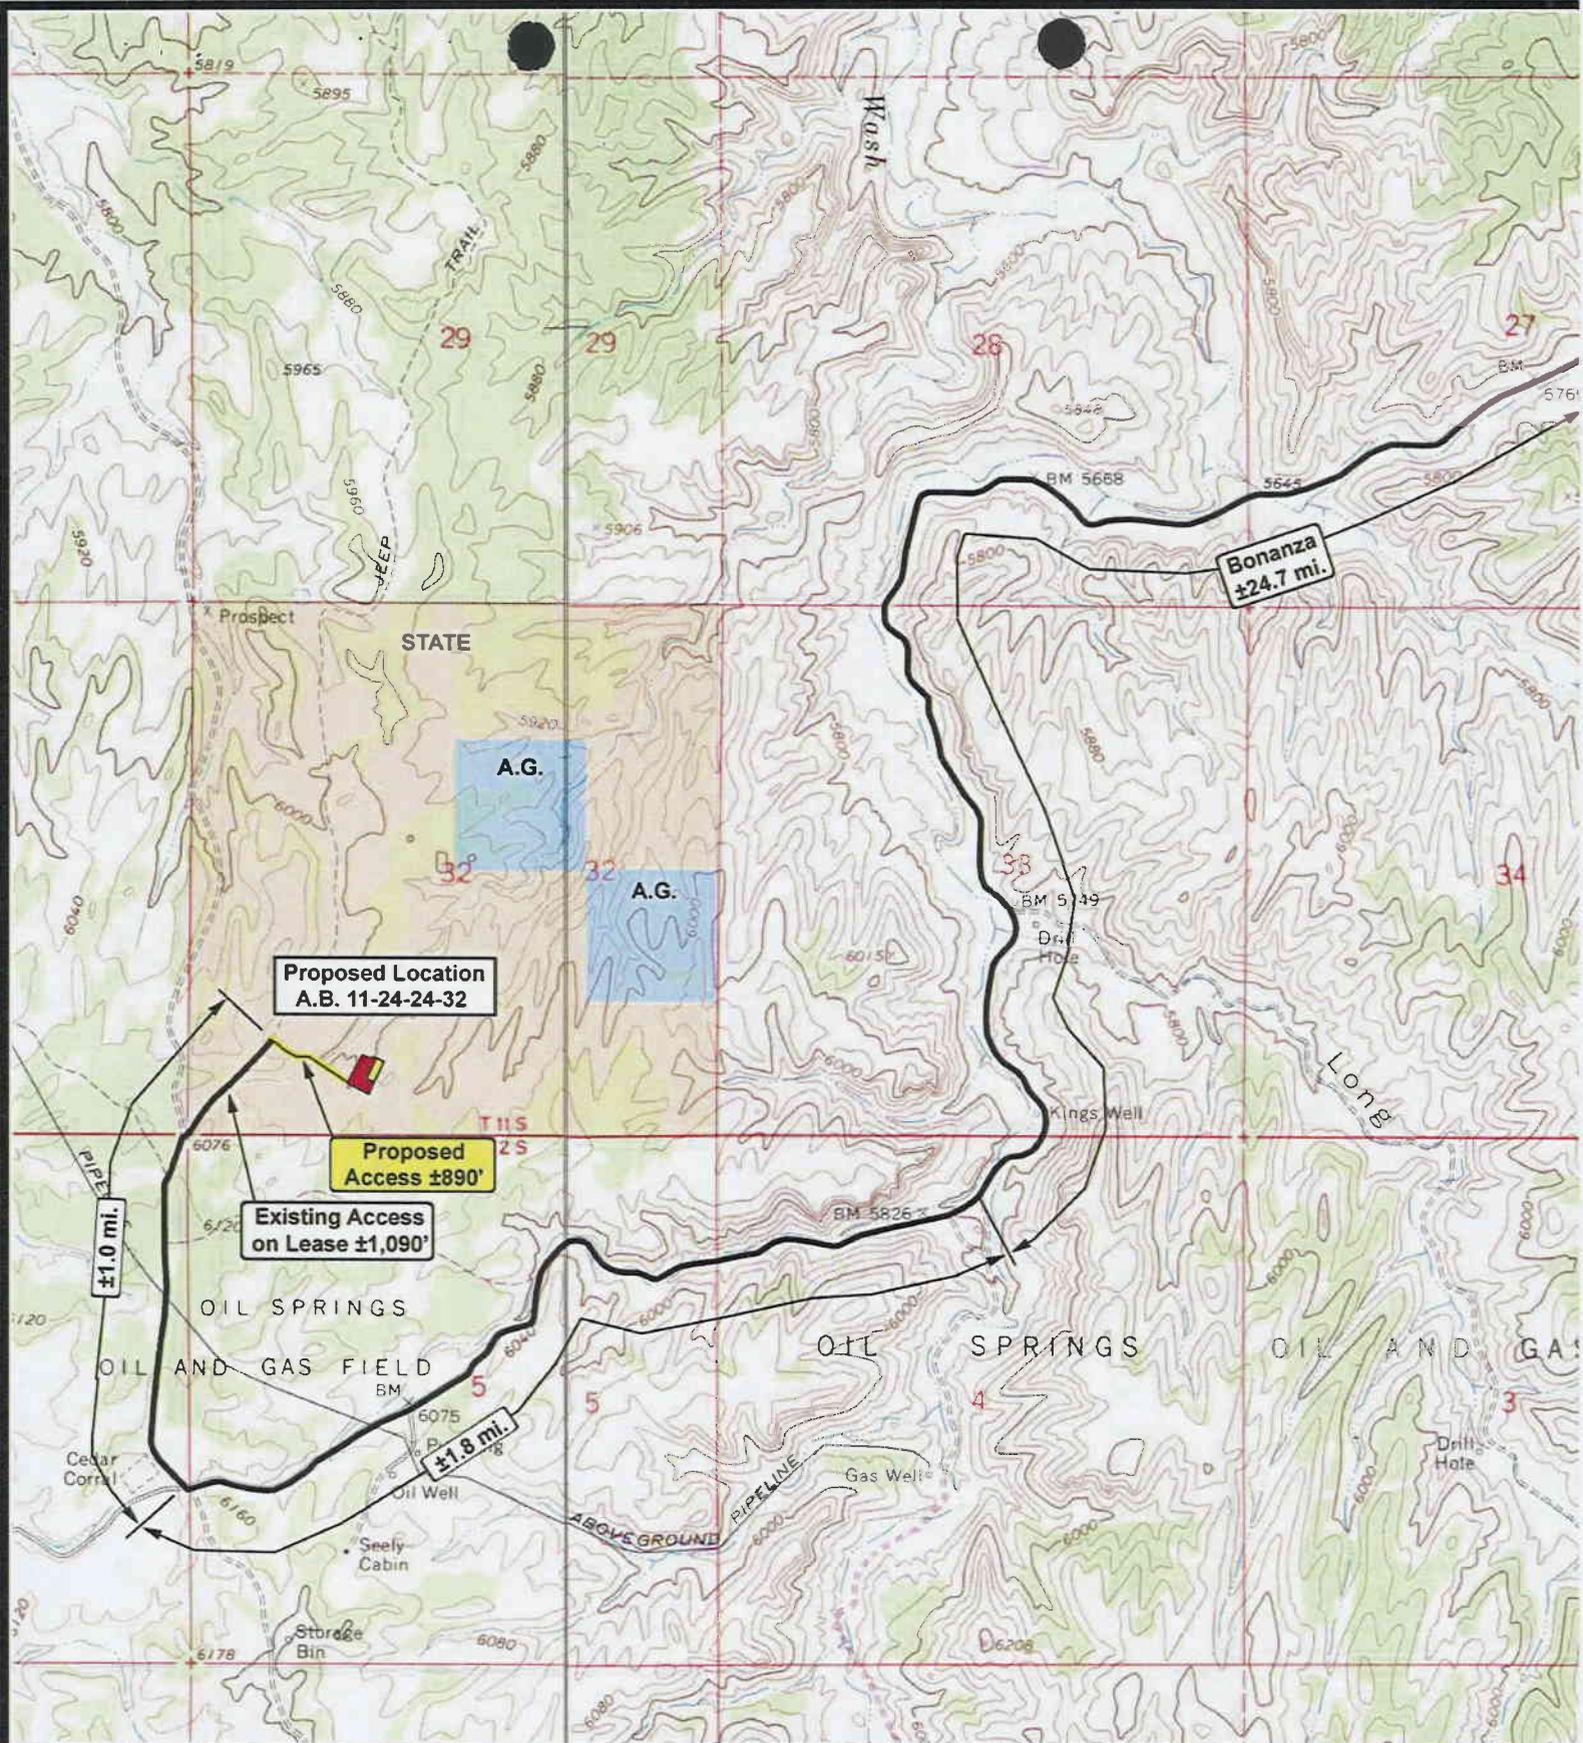

Proposed Location
A.B. 11-24-24-32

Proposed Access
±890'

Existing Access
on Lease ±1,090'

Bonanza
±24.7 mi.

Proposed Location
A.B. 11-24-24-32

Proposed Access
±890'

Existing Access
on Lease ±1,090'

Bonanza
±24.7 mi.

Proposed Location
A.B. 11-24-24-32

Proposed Access
±890'

Existing Access
on Lease ±1,090'

Bonanza
±24.7 mi.



ENDURING RESOURCES

Archy Bench 11-24-24-32
Sec. 32, T11S, R24E, S.L.B.&M.




Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'
DRAWN BY: mw
DATE: 06-29-2005

Legend

- Existing Road
- Proposed Access

TOPOGRAPHIC MAP SHEET
"B" 7 OF 9

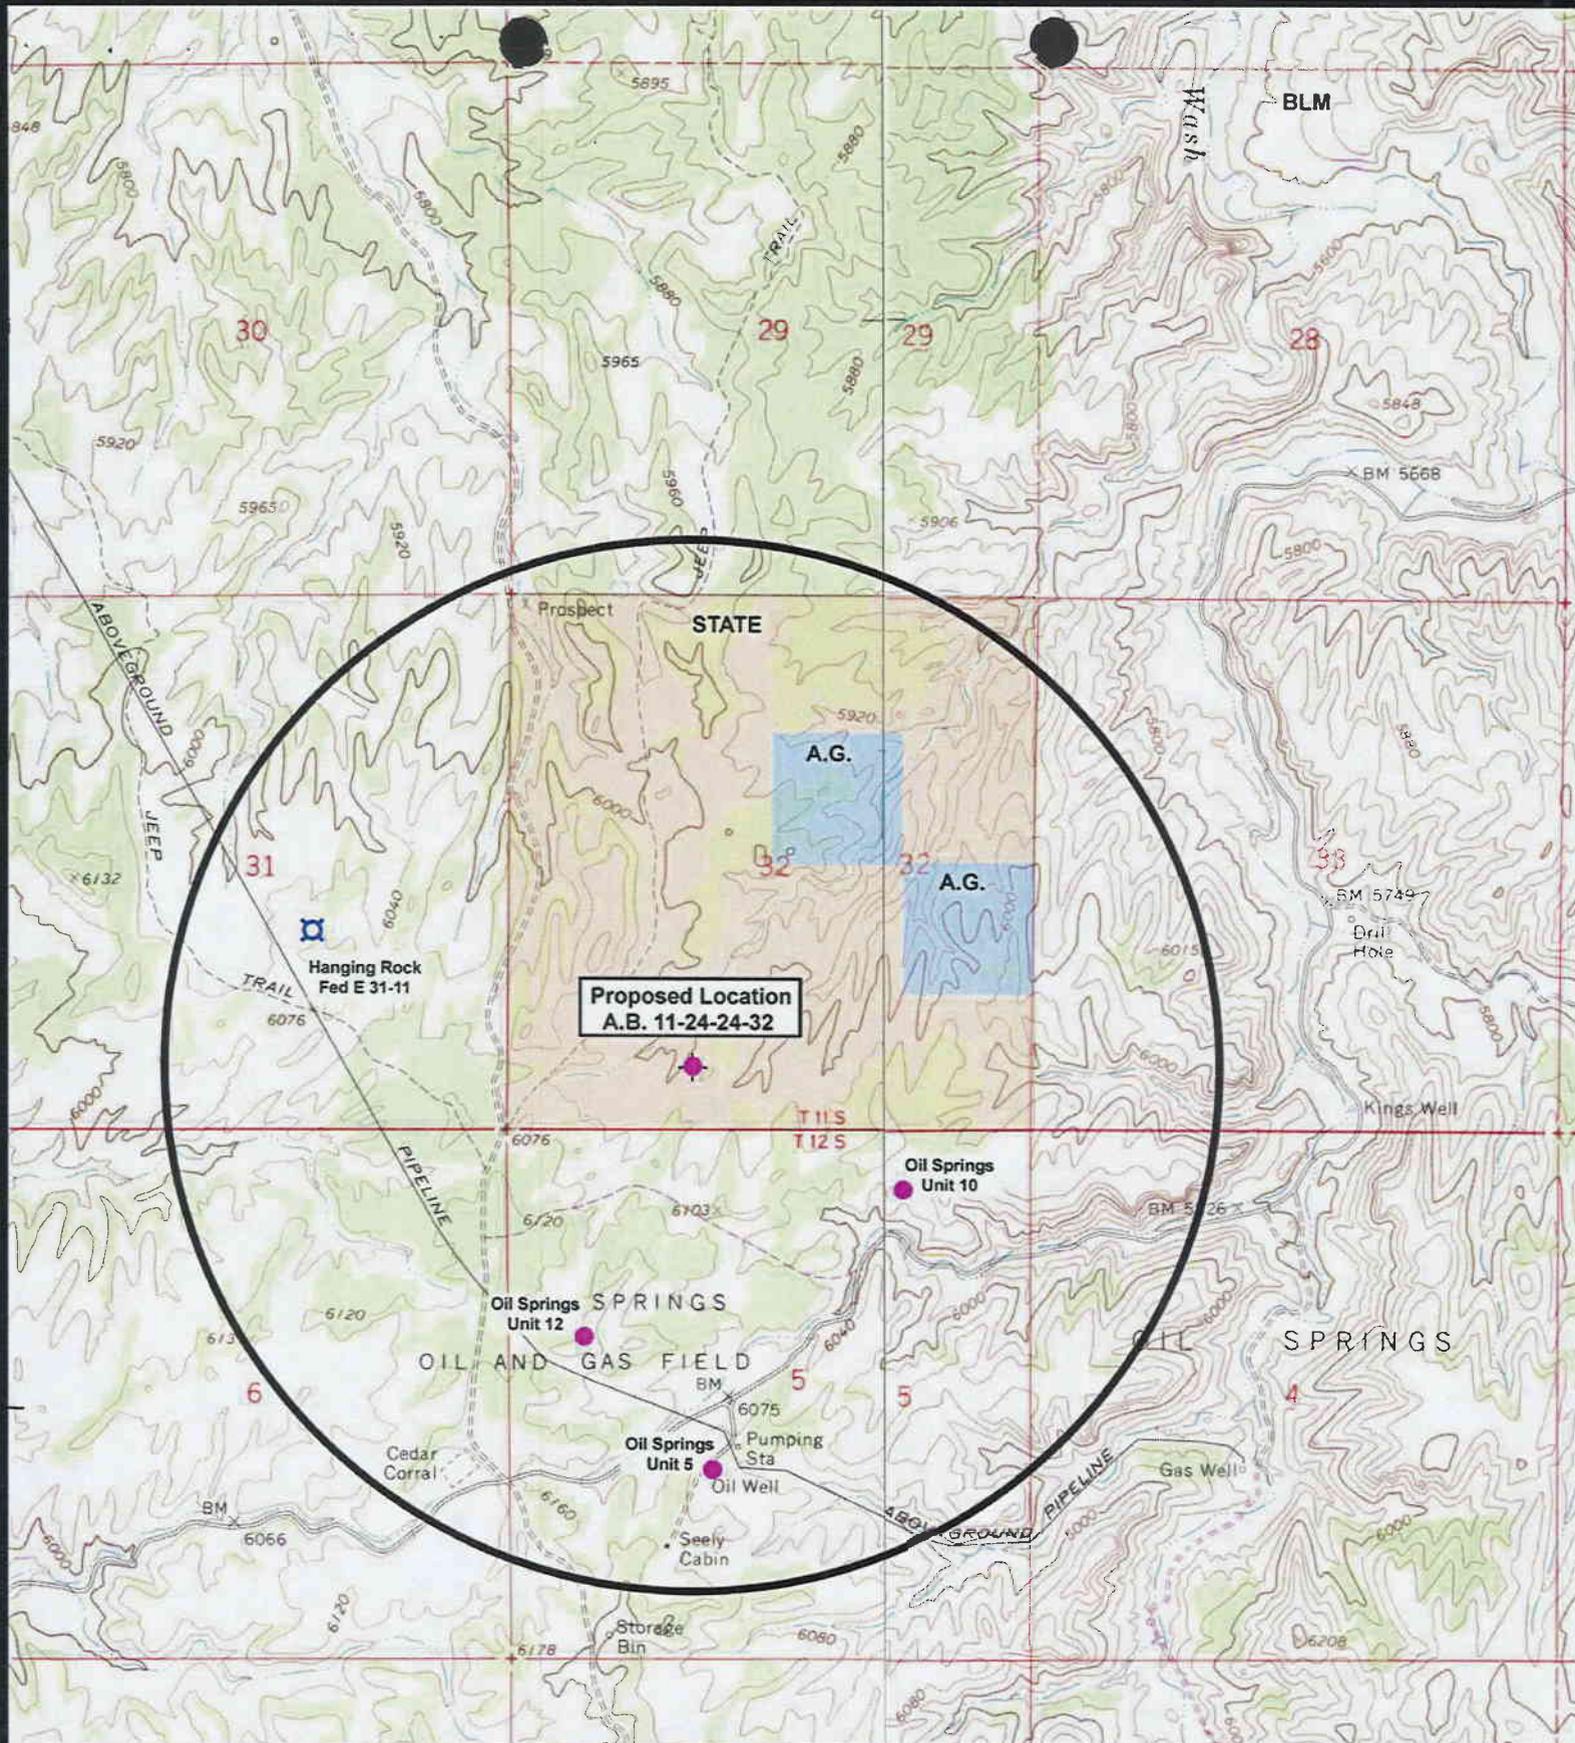

**Proposed Location
A.B. 11-24-24-32**



ENDURING RESOURCES

**Archy Bench 11-24-24-32
SEC. 32, T11S, R24E, S.L.B.&M.**




**Tri-State
Land Surveying Inc.**
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'
DRAWN BY: mw
DATE: 06-29-2005

Legend

- Location
- One-Mile Radius
- ⊠ Plugged & Abandoned

TOPOGRAPHIC MAP SHEE **8**
"C" OF 9

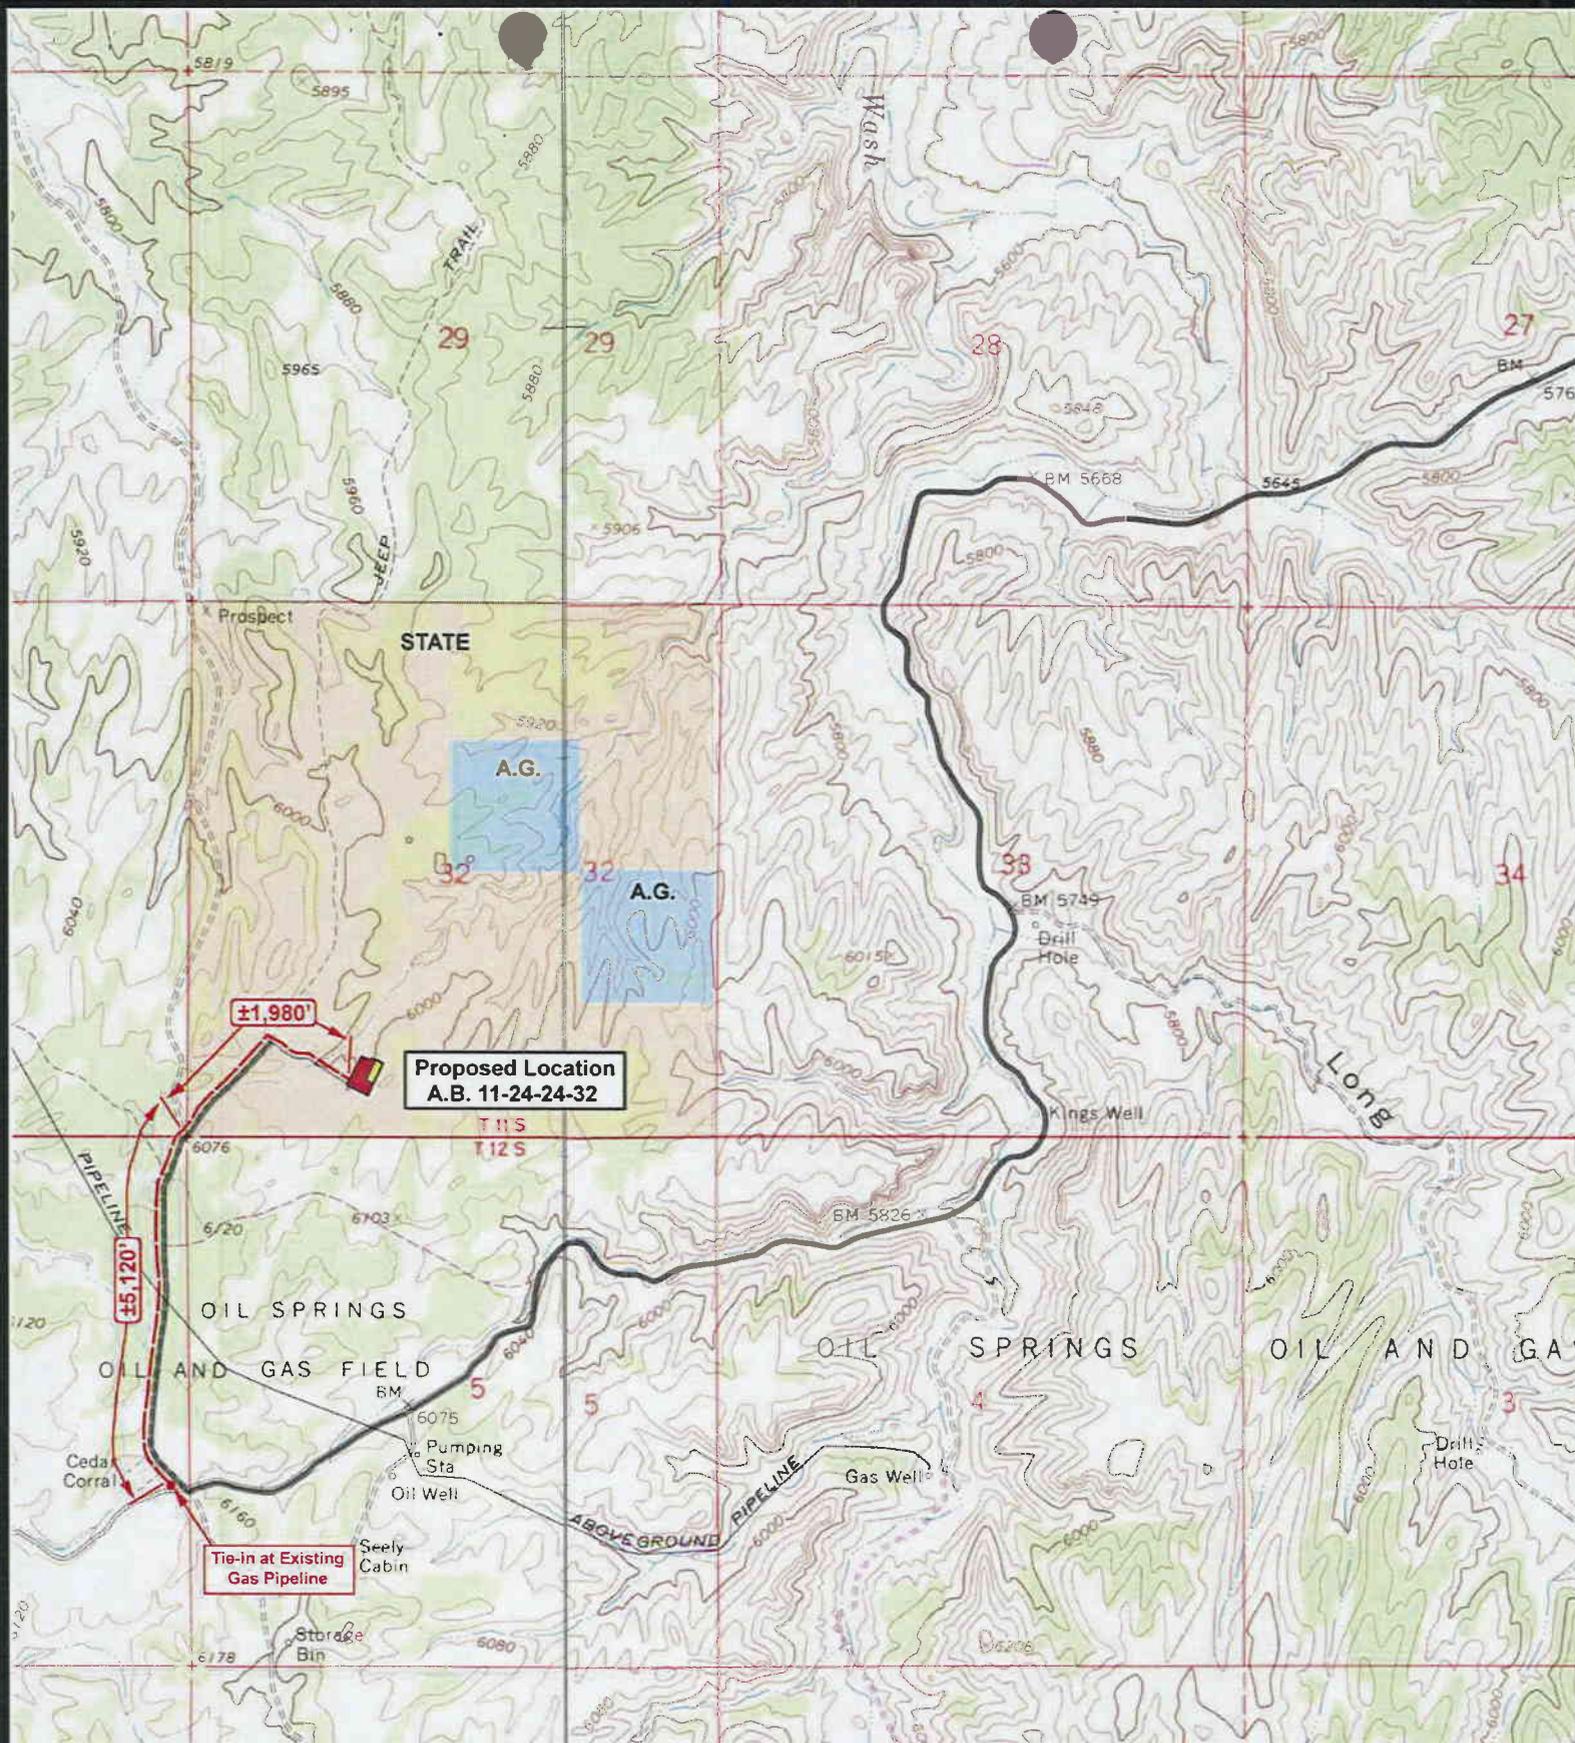

ENDURING RESOURCES

**Archy Bench 11-24-24-32
Sec. 32, T11S, R24E, S.L.B.&M.**



Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'
DRAWN BY: bgm
DATE: 06-29-2005

Legend	
	Roads
	Proposed Gas Line
TOPOGRAPHIC MAP	
"D"	
SHEET	9
OF 9	

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 07/05/2005

API NO. ASSIGNED: 43-047-36819

WELL NAME: ARCHY BENCH 11-24-24-32
 OPERATOR: ENDURING RESOURCES, LLC (N2750)
 CONTACT: PHYLLIS SOBOTIK

PHONE NUMBER: 303-350-5114

PROPOSED LOCATION:

SESW 32 110S 240E
 SURFACE: 0660 FSL 1780 FWL
 BOTTOM: 0660 FSL 1780 FWL
 UINTAH
 OIL SPRINGS (635)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering	Died	8/5/05
Geology		
Surface		

LEASE TYPE: 3 - State
 LEASE NUMBER: ML-49762
 SURFACE OWNER: 3 - State
 PROPOSED FORMATION: MVRD
 COALBED METHANE WELL? NO

LATITUDE: 39.81304
 LONGITUDE: -109.2571

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[] Ind[] Sta[] Fee[]
(No. RLB0008031)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 49-2185)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)

LOCATION AND SITING:


- ___ R649-2-3.
- Unit _____
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- ___ R649-3-3. Exception
- ___ Drilling Unit
Board Cause No: _____
Eff Date: _____
Siting: _____
- ___ R649-3-11. Directional Drill

COMMENTS:

Needs Permit (07-20-05)

STIPULATIONS:

- 1- Spacing Wap
- 2- Surface Csg Cont Stop
- 3- STATEMENT OF BASIS

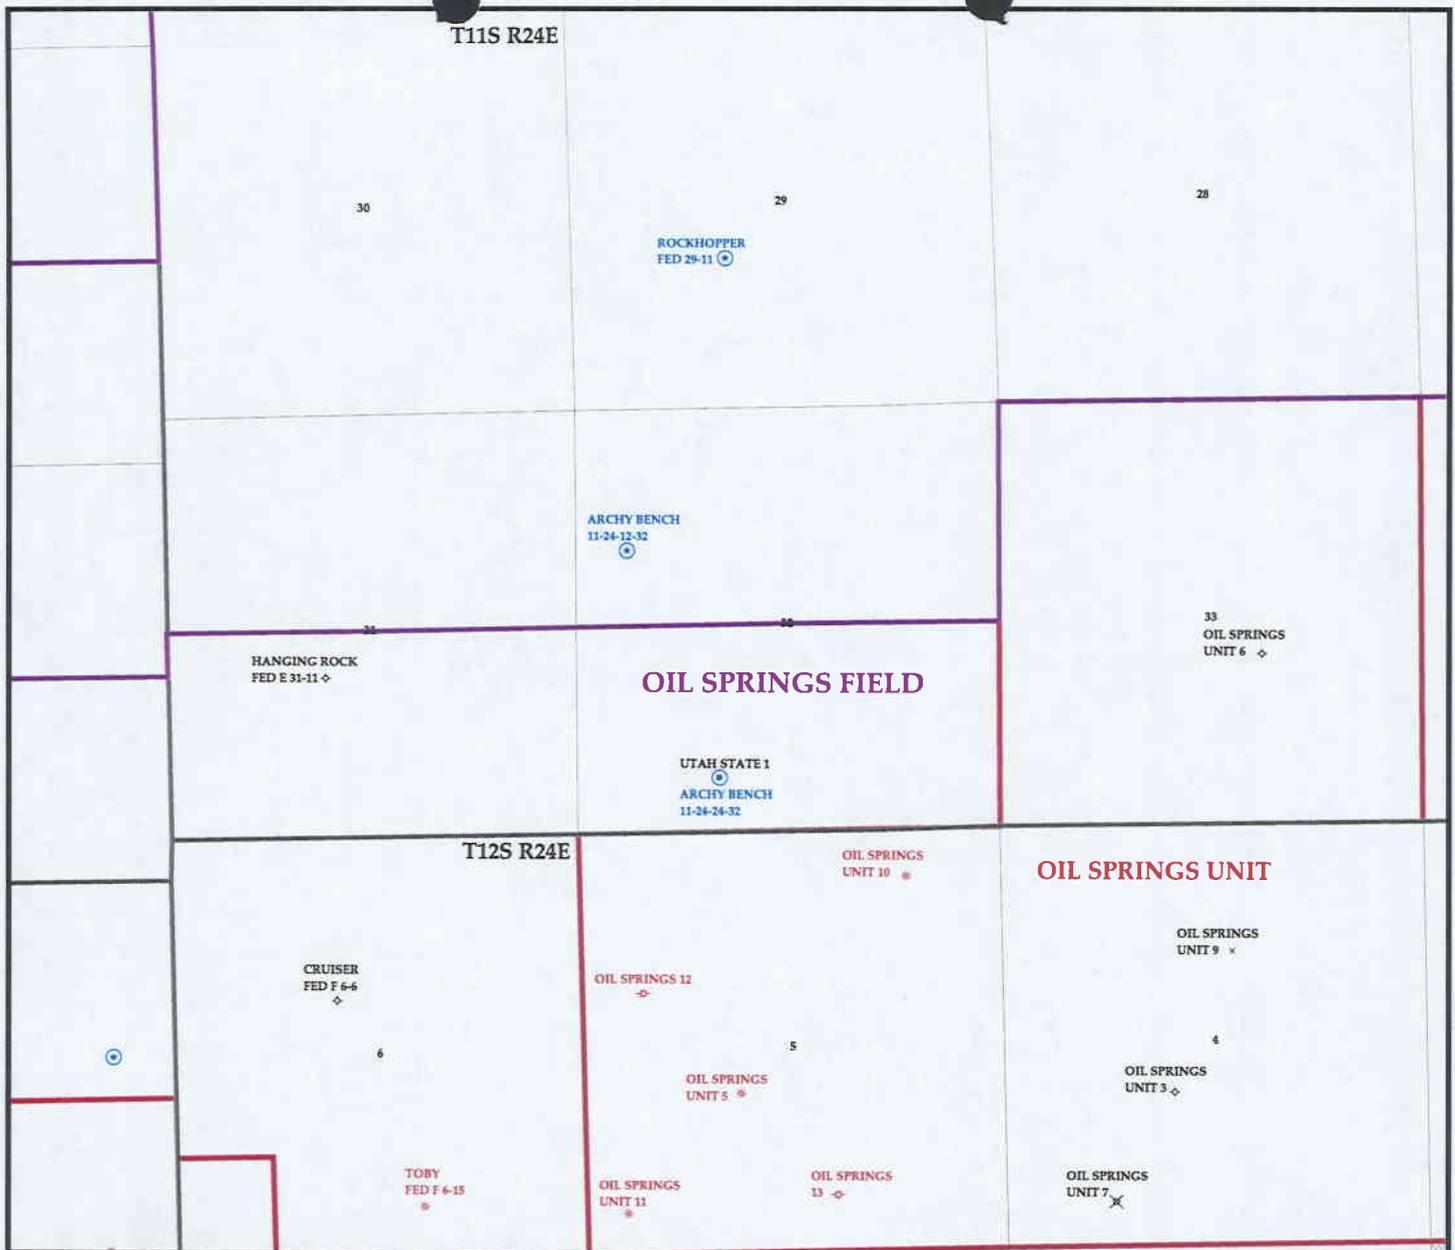


OPERATOR: ENDURING RES LLC (N2750)

SEC: 32 T. 11S R. 24E

FIELD: OIL SPRINGS (635)

COUNTY: UINTAH

SPACING: R649-3-2 / GENERAL SITING



Utah Oil Gas and Mining

Wells

- ♣ GAS INJECTION
- ✱ GAS STORAGE
- × LOCATION ABANDONED
- ⊕ NEW LOCATION
- ⬠ PLUGGED & ABANDONED
- ✱ PRODUCING GAS
- PRODUCING OIL
- ✱ SHUT-IN GAS
- ✱ SHUT-IN OIL
- × TEMP. ABANDONED
- TEST WELL
- ▲ WATER INJECTION
- ◆ WATER SUPPLY
- ♣ WATER DISPOSAL

Units.shp

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED

Fields.shp

- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED



PREPARED BY: DIANA WHITNEY
DATE: 11-JULY-2005

**DIVISION OF OIL, GAS AND MINING
APPLICATION FOR PERMIT TO DRILL
STATEMENT OF BASIS**

OPERATOR: ENDURING RESOURCES, LLC
WELL NAME & NUMBER: ARCHEY BENCH 11-24-24-32
API NUMBER: 43-047-36819
LOCATION: 1/4,1/4 SE/SW Sec: 32 TWP: 11S RNG: 24E 660' FSL 1780' FWL

Geology/Ground Water:

Enduring proposes to set 2,000 feet of surface casing cemented to the surface. The base of the moderately saline water is estimated at 3,500 feet. A search of Division of Water Rights records shows 1 water well within a 10,000 foot radius of the center of section 32. This well is over a mile from the proposed location. The well is 82 feet deep and is listed as being used for stock watering. The surface formation at this location is the Uinta/Green River Formation transition. The Uinta Formation is made up of discontinuous sands interbedded with shales and are not expected to produce prolific aquifers. The Green River Formation is made up of interbedded limestones, shales and sandstones. Fresh water aquifers can be found in the Green River Formation and should be protected. Production casing cement should be brought up above the base of the moderately saline ground water to isolate it from fresh waters uphole. The proposed surface casing should adequately protect any potentially useable aquifers.

Reviewer: Brad Hill Date: 07-26-05

Surface:

The predrill investigation of the surface was performed on 7/20/05. This site is on State surface, with State minerals, and appears to be a good site for a well location in this drilling window. Ed Bonner of SITLA and Chris Wood of DWR were invited to attend this investigation. Neither agency was in attendance. And, neither Mr. Bonner nor Mr. Wood stated any concerns with drilling on this location.

Reviewer: Richard Powell Date: 7/22/2005

Conditions of Approval/Application for Permit to Drill:

1. A synthetic liner with a minimum thickness of 12 mils with a felt subliner shall be properly installed and maintained in the reserve pit.

ON-SITE PREDRILL EVALUATION
Division of Oil, Gas and Mining

OPERATOR: ENDURING RESOURCES, LLC
WELL NAME & NUMBER: ARCHY BENCH 11-24-24-32
API NUMBER: 43-047-36819
LEASE: ML-49762 FIELD/UNIT: N/A
LOCATION: 1/4,1/4 SE/SW Sec: 32 TWP: 11S RNG: 24E 660' FSL 1780' FWL
LEGAL WELL SITING: 460 F SEC. LINE; 460 F 1/4,1/4 LINE; 920 F ANOTHER WELL.
GPS COORD (UTM): 12S 0649196 4408248 SURFACE OWNER: SITLA.

PARTICIPANTS

RICHARD POWELL (DOGM), COREY MILLER (TRISTATE SURVEYING), DOUG HAMMOND (ENDURING), CHUCK WISE (DIRT CONTRACTOR).

REGIONAL/LOCAL SETTING & TOPOGRAPHY

GENTLY ROLLING AND STEEP HILLS WITH OUTCROPINGS OF STONE AND SHALE LAYERS TYPIFY THE TOPOGRAPHY OF THIS REGION. LOCATION IS SET IN A RELATIVELY FLAT VALLEY WITH A SMALL RIDGE IMMEDIATELY TO THE EAST AND A LARGER RIDGE APPROXIMATELY 200 YARDS TO THE WEST. THE VALLEY DRAINS TO THE NORTH GRADUALLY. VALLEY FLOOR IS DOMINATED BY SAGE BRUSH WITH THE SLOPES CONTAINING PINYON AND JUNIPER. BONANZA IS APPROXIMATELY 26.5 MILES TO THE NORTH.

SURFACE USE PLAN

CURRENT SURFACE USE: WILDLIFE AND LIVESTOCK GRAZING.

PROPOSED SURFACE DISTURBANCE: LOCATION WILL BE 355' BY 225'. PROPOSED NEW ACCESS ROAD APPROXIMATELY 890'.

LOCATION OF EXISTING WELLS WITHIN A 1 MILE RADIUS: SEE ATTACHED MAP FROM GIS DATABASE.

LOCATION OF PRODUCTION FACILITIES AND PIPELINES: ALL PRODUCTION FACILITIES WILL BE ON LOCATION AND ADDED AFTER DRILLING WELL. PIPELINE WILL FOLLOW ACCESS ROAD.

SOURCE OF CONSTRUCTION MATERIAL: ALL CONSTRUCTION MATERIAL WILL BE BORROWED FROM SITE DURING CONSTRUCTION OF LOCATION.

ANCILLARY FACILITIES: NONE WILL BE REQUIRED.

WILL DRILLING AT THIS LOCATION GENERATE PUBLIC INTEREST OR CONCERNS? (EXPLAIN): UNLIKELY.

WASTE MANAGEMENT PLAN:

DRILLED CUTTINGS WILL BE SETTLED INTO RESERVE PIT. LIQUIDS FROM PIT WILL BE ALLOWED TO EVAPORATE. FORMATION WATER WILL BE CONFINED TO STORAGE TANKS. SEWAGE FACILITIES, STORAGE AND DISPOSAL WILL BE HANDLED BY

COMMERCIAL CONTRACTOR. TRASH WILL BE CONTAINED IN TRASH BASKETS AND HAULED TO AN APPROVED LAND FILL.

ENVIRONMENTAL PARAMETERS

AFFECTED FLOODPLAINS AND/OR WETLANDS: NO SURFACE WATER NEAR LOCATION.

FLORA/FAUNA: RABBIT BRUSH, GREASE WOOD, SAGEBRUSH, SHADSCALE, PRICKLY PEAR, UTAH JUNIPER, AND PINYON. DEER, ELK, RODENTS, RAPTORS, COYOTE, SONGBIRDS, RABBIT, BOBCAT, PRONGHORN.

SOIL TYPE AND CHARACTERISTICS: LIGHT BROWN SANDY CLAY WITH UNDERLYING SHALE.

EROSION/SEDIMENTATION/STABILITY: VERY LITTLE NATURAL EROSION. SEDIMENTATION AND STABILITY ARE NOT A PROBLEM AND LOCATION CONSTRUCTION SHOULDN'T CAUSE AN INCREASE IN STABILITY OR EROSION PROBLEMS.

PALEONTOLOGICAL POTENTIAL: NONE OBSERVED

RESERVE PIT

CHARACTERISTICS: 215' BY 75' AND TWELVE FEET DEEP. RESERVE PIT TO BE PLACED IN CUT.

LINER REQUIREMENTS (Site Ranking Form attached): A LINER AND FELT SUB-LINER WILL BE REQUIRED FOR RESERVE PIT.

SURFACE RESTORATION/RECLAMATION PLAN

AS PER SITLA

SURFACE AGREEMENT: AS PER SITLA

CULTURAL RESOURCES/ARCHAEOLOGY: ARCHAEOLOGY STUDY HAS NOT BEEN DONE.

OTHER OBSERVATIONS/COMMENTS

NORTH ARROW ON LOCATION PLAT WAS POINTED IN THE WRONG DIRECTION; TRISTATE SURVEYING STATED THEY WOULD SUBMIT AN AMMENDED PLAT.

ATTACHMENTS

PHOTOS OF THIS SITE WERE TAKEN AND PLACED ON FILE.

RICHARD POWELL
DOGM REPRESENTATIVE

07/20/2005 02:15 AM
DATE/TIME

**Evaluation Ranking Criteria and Ranking Score
For Reserve and Onsite Pit Liner Requirements**

<u>Site-Specific Factors</u>	<u>Ranking</u>	<u>Site Ranking</u>
Distance to Groundwater (feet)		
>200	0	
100 to 200	5	
75 to 100	10	
25 to 75	15	
<25 or recharge area	20	<u>5</u>
Distance to Surf. Water (feet)		
>1000	0	
300 to 1000	2	
200 to 300	10	
100 to 200	15	
< 100	20	<u>0</u>
Distance to Nearest Municipal Well (feet)		
>5280	0	
1320 to 5280	5	
500 to 1320	10	
<500	20	<u>0</u>
Distance to Other Wells (feet)		
>1320	0	
300 to 1320	10	
<300	20	<u>0</u>
Native Soil Type		
Low permeability	0	
Mod. permeability	10	
High permeability	20	<u>20</u>
Fluid Type		
Air/mist	0	
Fresh Water	5	
TDS >5000 and <10000	10	
TDS >10000 or Oil Base Mud Fluid	15	
containing significant levels of hazardous constituents	20	<u>5</u>
Drill Cuttings		
Normal Rock	0	
Salt or detrimental	10	<u>0</u>
Annual Precipitation (inches)		
<10	0	
10 to 20	5	
>20	10	<u>0</u>
Affected Populations		
<10	0	
10 to 30	6	
30 to 50	8	
>50	10	<u>0</u>
Presence of Nearby Utility Conduits		
Not Present	0	
Unknown	10	
Present	15	<u>0</u>

Final Score 30 (Level I Sensitivity)

Sensitivity Level I = 20 or more; total containment is required.
Sensitivity Level II = 15-19; lining is discretionary.
Sensitivity Level III = below 15; no specific lining is required.





JUL 20 2005



JUL 20 2005

utah
gov

State Online Services Agency for Business and Industry

Search Utah.gov



GO

UTAH DIVISION OF WATER RIGHTS

WRPLAT Program Output Listing

Version: 2004.12.30.00 Rundate: 07/26/2005 01:59 PM

Radius search of 10000 feet from a point N2640 E2640 from the SW corner, section 32, Township 11S, Range 24E, SL b&m
Criteria:wrtypes=W,C,E podtypes=U status=U,A,P usetypes=all

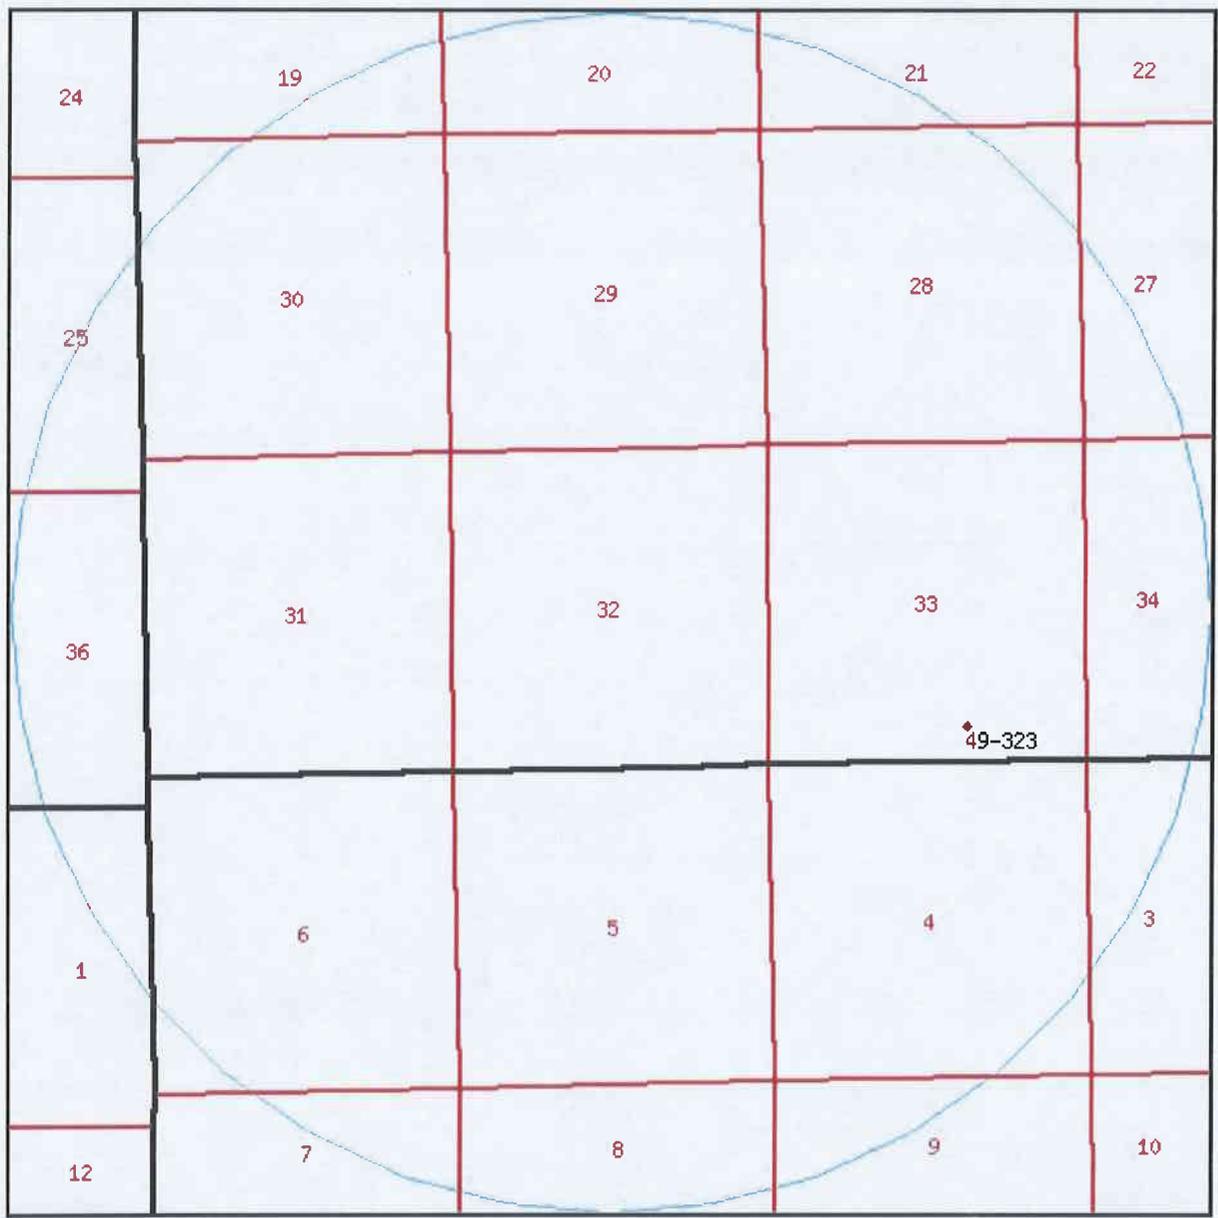


Water Rights

WR Number	Diversion Type/Location	Well Log	Status	Priority	Uses	CFS	ACFT	Owner Name
49-323	Underground N560 E660 S4 33 11S 24E SL		A	19770310	S	0.018	0.000	VERNAL DISTRICT USA BUREAU OF LAND MANAGEMENT 170 SOUTH 500 EAST

[Natural Resources](#) | [Contact](#) | [Disclaimer](#) | [Privacy Policy](#) | [Accessibility Policy](#)

05 Enduring Archy Bench 1F-24-24-32

Casing Schematic

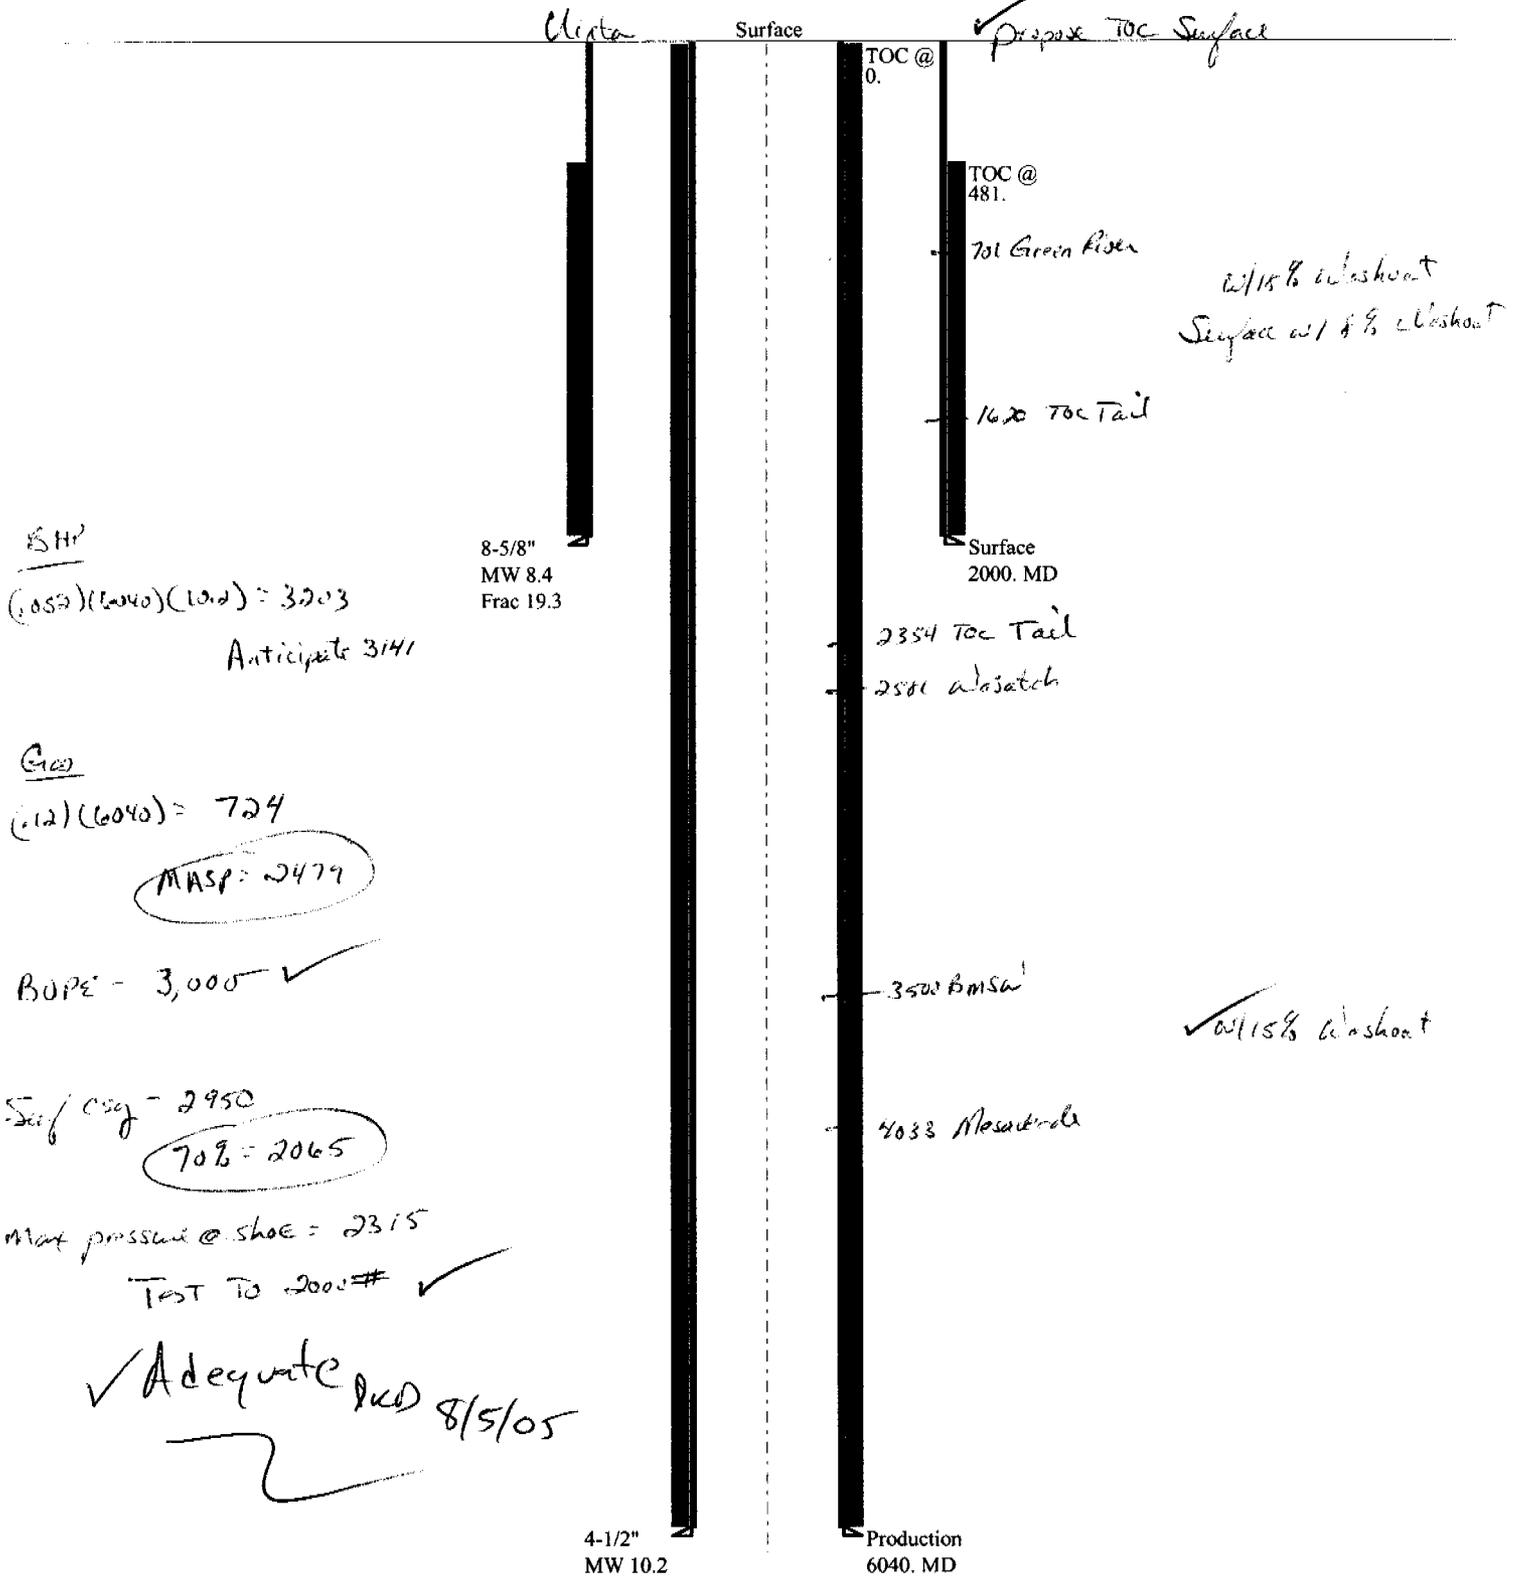

Well name:	08-05 Enduring Archy Bench 11-24-24-32	
Operator:	Enduring Resources, LLC	
String type:	Surface	Project ID: 43-047-36819
Location:	Uintah County	

Design parameters:

Collapse
Mud weight: 8.400 ppg
Design is based on evacuated pipe.

Burst
Max anticipated surface pressure: 1,744 psi
Internal gradient: 0.120 psi/ft
Calculated BHP 1,984 psi

No backup mud specified.

Minimum design factors:

Collapse:
Design factor 1.125

Burst:
Design factor 1.00

Tension:
8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)

Tension is based on buoyed weight.
Neutral point: 1,748 ft

Environment:

H2S considered? No
Surface temperature: 75 °F
Bottom hole temperature: 103 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 350 ft

Cement top: 481 ft

Completion type is subs
Non-directional string.

Re subsequent strings:
Next setting depth: 6,800 ft
Next mud weight: 10.200 ppg
Next setting BHP: 3,603 psi
Fracture mud wt: 19.250 ppg
Fracture depth: 1,982 ft
Injection pressure 1,982 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	2000	8.625	24.00	J-55	ST&C	2000	2000	7.972	96.3

Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	873	1368	1.567	1984	2950	1.49	42	244	5.82 J

Prepared by: Clinton Dworshak
Utah Div. of Oil & Mining

Phone: 801-538-5280
FAX: 801-359-3940

Date: August 2, 2005
Salt Lake City, Utah

Remarks:
Collapse is based on a vertical depth of 2000 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Well name:

08-05 Enduring Archy Bench 11-24-24-32Operator: **Enduring Resources, LLC**String type: **Production**

Project ID:

43-047-36819

Location: **Uintah County****Design parameters:****Collapse**Mud weight: 10.200 ppg
Design is based on evacuated pipe.**Burst**Max anticipated surface
pressure: 2,476 psi
Internal gradient: 0.120 psi/ft
Calculated BHP 3,200 psi

No backup mud specified.

Minimum design factors:**Collapse:**

Design factor 1.125

Burst:

Design factor 1.00

Tension:8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)

Tension is based on buoyed weight.

Neutral point: 5,119 ft

Environment:H2S considered? No
Surface temperature: 75 °F
Bottom hole temperature: 160 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 1,500 ft

Cement top: Surface

Completion type is subs
Non-directional string.

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	6040	4.5	11.60	N-80	LT&C	6040	6040	3.875	140

Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	3200	6346	1.983	3200	7780	2.43	59	223	3.76 J

Prepared by: Clinton Dworshak
Utah Div. of Oil & MiningPhone: 801-538-5280
FAX: 801-359-3940Date: August 2,2005
Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 6040 ft, a mud weight of 10.2 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.



Enduring Resources

475 17th Street Suite 1500 Denver Colorado 80202
Telephone 303 573-1222 Fax 303 573 0461

August 4, 2005

Utah Division of Oil, Gas and Mining
1594 West North Temple, Suite 1210
P. O. Box 145801
Salt Lake City, Utah 84114-5801

Attn.: Ms. Diana Whitney

RE: Archy Bench 11-24-24-32
SESW Sec 32 T11S-R24E
Uintah County, Utah

Dear Ms. Whitney:

Enclosed, in duplicate, are revised original pages for the application to drill concerning the referenced proposed well.

Form 3
Sheets #3, 4, 5
Drilling Plan

The initial application to drill was submitted July 1, 2005. During the onsite conducted on July 20, 2005, it was discovered Sheets #3, 4, and 5 displayed data for the Archy Bench 11-24-12-32 instead of for the Archy Bench 11-24-24-32 and vice versa. No changes were made to the physical location. Modifications to the drilling plan have occurred due to the previous incorrect labeling of these sheets – changes are highlighted.

This information has also been submitted to the School and Institutional Trust Lands Administration.

Enduring Resources, LLC is requesting the Utah Division of Oil, Gas and Mining to hold this application and all future information as confidential.

If any questions arise or additional information is required, please contact me at 303-350-5114.

Sincerely,

Phyllis Sobotik
Regulatory Specialist

Enclosures:

xc: School and Institutional Trust Lands Administration
675 East 500 South, Suite 500
Salt Lake City, Utah 84102
Attn: Mr. Ed Bonner

RECEIVED
AUG 08 2005

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING



CONFIDENTIAL

FORM 3

AMENDED REPORT
(highlight changes)

APPLICATION FOR PERMIT TO DRILL			5. MINERAL LEASE NO: ML-49762	6. SURFACE: State
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>	7. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A		8. UNIT or CA AGREEMENT NAME: N/A	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input checked="" type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>	2. NAME OF OPERATOR: Enduring Resources, LLC		9. WELL NAME and NUMBER: Archy Bench 11-24-24-32	
3. ADDRESS OF OPERATOR: 475 17th St, Suite 1500 CITY Denver STATE CO ZIP 80202		PHONE NUMBER: (303) 350-5114	10. FIELD AND POOL, OR WILDCAT: Undesignated	
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 660' FSL 1780' FWL Sec 32 T11S R24E S.L.B.&M. AT PROPOSED PRODUCING ZONE: Same as above			11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESW 32 11S 24E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 26.3 miles southwesterly from Bonanza, Utah			12. COUNTY: Uintah	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 660'	16. NUMBER OF ACRES IN LEASE: 560	17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 40		
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) 3057.70'	19. PROPOSED DEPTH: 6,069	20. BOND DESCRIPTION: RLB0008031		
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 6008.6' GR Ungraded	22. APPROXIMATE DATE WORK WILL START: 10/15/2005	23. ESTIMATED DURATION: 20 days		

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT	SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT		
12-1/4"	8-5/8" J-55 24#	2,000	65/35 Poz	462 sx	1.81 12.6 ppg
			Prem	236 sx	1.18 15.6 ppg
7-7/8"	4-1/2" N-80/I-80 11.6#	6,069	Prem Lite II	293 sx	3.38 11.0 ppg
			50/50 Poz CI G	951 sx	1.31 14.3 ppg

ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:

- | | |
|--|--|
| <input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER | <input checked="" type="checkbox"/> COMPLETE DRILLING PLAN |
| <input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER | <input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER |

NAME (PLEASE PRINT) Phyllis Sobotik TITLE Regulatory Specialist
SIGNATURE *Phyllis Sobotik* DATE Aug 4 2005

(This space for State use only)

API NUMBER ASSIGNED: 43-047-36819

Approved by the
Utah Division of
Oil, Gas and Mining
APPROVAL:


Date: 09-22-05
By: *[Signature]*
(See Instructions on Reverse Side)

RECEIVED
AUG 08 2005

DIV. OF OIL, GAS & MINING

T11S, R24E, S.L.B.&M.


ENDURING RESOURCES

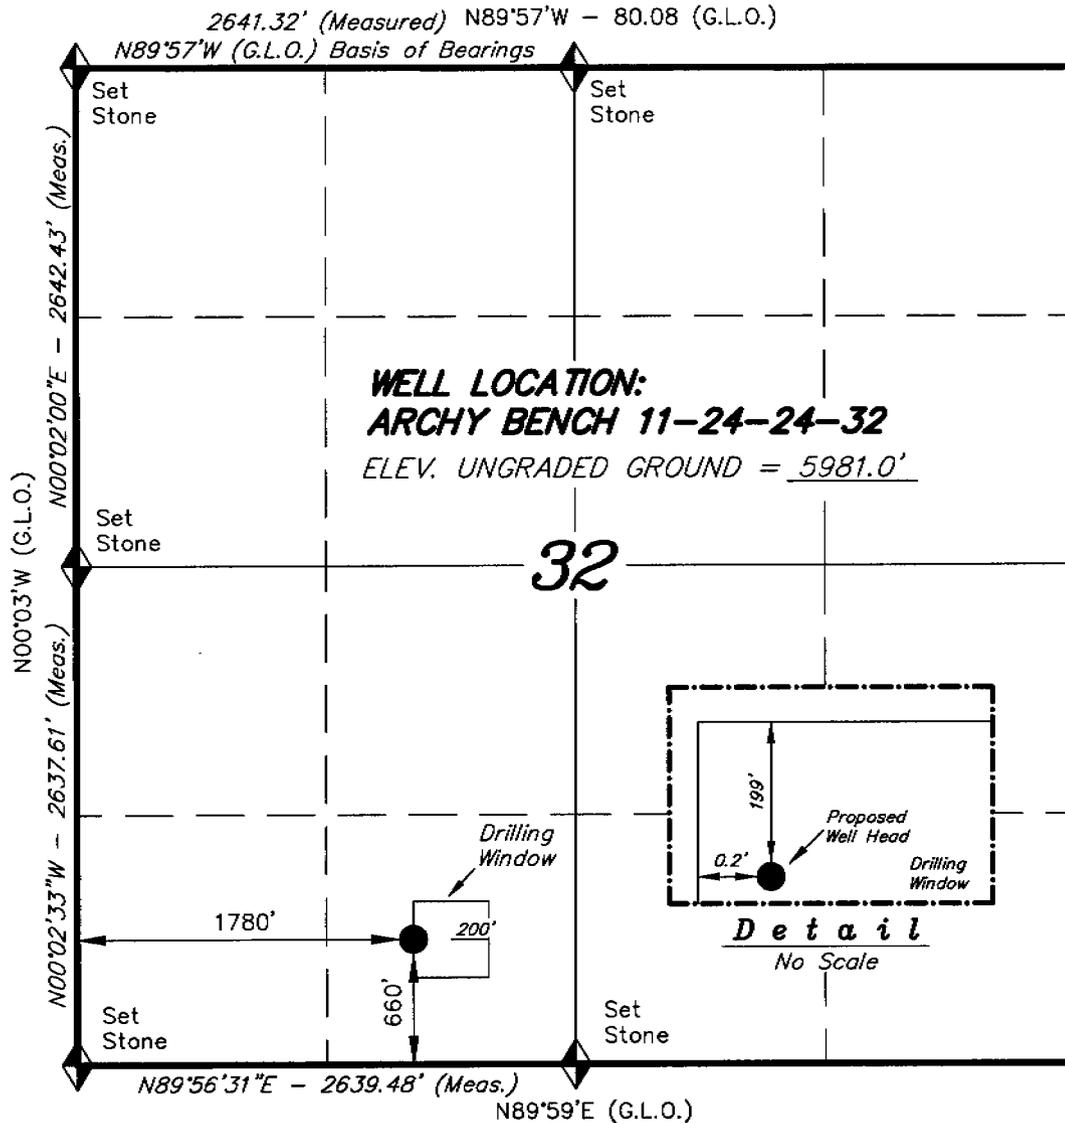

WELL LOCATION, ARCHY BENCH 11-24-24-32, LOCATED AS SHOWN IN THE SE 1/4 SW 1/4 OF SECTION 32, T11S, R24E, S.L.B.&M. UTAH COUNTY, UTAH.



THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF. No.189377

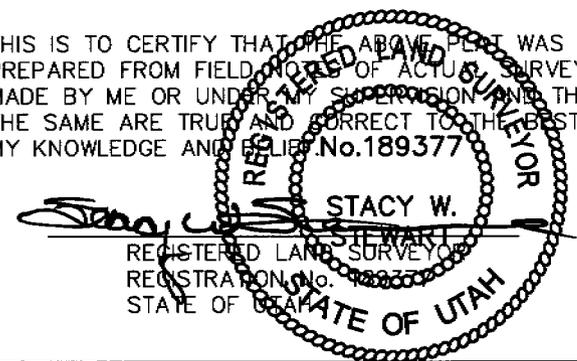

◆ = SECTION CORNERS LOCATED
 BASIS OF ELEV; U.S.G.S. 7-1/2 min QUAD (ARCHY BENCH SE)

ARCHY BENCH 11-24-24-32
 (Surface Location) NAD 83
 LATITUDE = 39° 48' 46.66"
 LONGITUDE = 109° 15' 27.60"

TRI STATE LAND SURVEYING & CONSULTING 180 NORTH VERNAL AVE. - VERNAL, UTAH 84078 (435) 781-2501		
DATE DRAWN: 5-9-05	SURVEYED BY: C.M.	SHEET 2 OF 9
REVISED: 6-29-05	DRAWN BY: F.T.M.	
NOTES:	SCALE: 1" = 1000'	

**Enduring Resources, LLC
Archy Bench 11-24-24-32
SESW Sec. 32 T11S-R24E
Uintah County, Utah
Lease # ML-49762**

ONSHORE ORDER 1 - DRILLING PLAN

1. Estimated Tops of Geological Markers:

<u>Formation</u>	<u>Depth</u>
Uinta	Surface
Green River	730'
Wasatch	2610'
Mesaverde	4062'

2. Estimated Depths of Anticipated Water, Oil, Gas or Other Minerals: (6018.8' estimated KB)

Substance	Formation	Depth
	Uinta	Surface
Oil / Gas	Green River	730'
Oil /Gas	Wasatch	2610'
Oil /Gas	Mesaverde	4062'
	Estimated TD	6069'

A 12-1/4" hole will be drilled to approximately 2000 feet. The depth will be determined by the depth that the Birds Nest zone is encountered. The hole will be drilled 400 feet beyond the top of the Birds Nest zone and surface casing will be set.

3. Pressure Control Equipment: (3000 psi schematic attached)

A. Type: Eleven (11) inch double gate hydraulic BOP with eleven (11) inch annular preventer with 3,000 psi Casinghead and 3,000 psi Tubinghead equipped per the attached diagrams for 3,000 psi. BOPE as specified in *Onshore Oil & Gas Order Number 2*. A PVT, Stroke Counter and flow sensor will be installed to check for flow and monitor pit volume.

B. Pressure Rating: 3,000 psi BOPE

C. Kelly will be equipped with upper and lower Kelly valves.

D. Testing Procedure: Annular Preventer

At a minimum, the annular preventer will be pressure tested to 50% of the stack rated working pressure for a period of ten (10) minutes or until provisions of the test are met, whichever is longer.

At a minimum, the above pressure test will be performed:

1. When the annular preventer is initially installed;
2. Whenever any seal subject to test pressure is broken;
3. Following related repairs; and
4. At thirty (30) day intervals.

In addition to the above, the annular preventer will be functionally operated at least weekly.

Blow-Out Preventer

At a minimum, the BOP, choke manifold, and related equipment will be pressure tested to the approved working pressure of the BOP stack (if isolated from the surface casing by a test plug) or to 70% of the internal yield strength of the surface casing (if the BOP is not isolated from the casing by a test plug). Pressure will be maintained for a period of at least ten (10) minutes or until the requirements of the test are met, whichever is longer.

At a minimum, the above pressure test will be performed:

1. When the BOP is initially installed;
2. Whenever any seal subject to test pressure is broken;
3. Following related repairs; and
4. At thirty (30) day intervals.

In addition to the above, the pipe and blind rams will be activated each trip, but not more than once each day. All BOP drills and tests will be recorded in the IADC driller's log.

D. Miscellaneous Information:

The blowout preventer and related pressure control equipment will be installed, tested and maintained in compliance with the specifications in and requirements of *Onshore Oil & Gas Order Number 2*.

Totco directional surveys will be dropped every 2000 feet. Maximum allowable angle is 5 degrees.

4. Proposed Casing & Cementing Program:**A. Casing Program: All New**

Hole Size	Casing Size	Wt./Ft.	Grade	Joint	Depth Set (md)
20"	16"				40'
12-1/4"	8-5/8"	24#	J-55	ST&C	0 – 2,000' est
7-7/8"	4-1/2"	11.6#	N-80/I-80	LT&C	0 – 6069'

The surface casing will have guide shoe, 1 jt., insert float collar. Centralize the first 3 joints with bowspring centralizers. Thread lock guide shoe.

Casing string(s) will be pressure tested to 0.22 psi/foot of casing string length or 1500 psi, whichever is greater (not to exceed 70% of the internal yield strength of the casing), after cementing and prior to drilling out from under the casing shoe.

B. Casing Design Parameters:

Depth (md)	Casing	Collapse(psi)/SF	Burst (psi)/SF	Tension(mlbs)/SF
40	16"			
2000	8-5/8", 24#/ft, J55, STC	1370/1.53(a)	4460/4.98(b)	244/5.08(c)
6069	4-1/2", 11.6#/ft, N-80, LTC	6350/2.03 (d)	7780/2.70 (e)	223/3.69 (f)

- (a.) based on full evacuation with 8.6 ppg fluid on annulus
- (b.) based on 8.6 ppg gradient with no fluid on annulus
- (c.) based on casing string weight in 8.6 ppg mud
- (d.) based on full evacuation with 10.0 ppg fluid on annulus, pipe evacuated

(e.) based on 9.2 ppg gradient, gas to surface, with no fluid on annulus, no gas gradient.

(f.) based on casing string weight in 9.2 ppg mud

PROPOSED CEMENTING PROGRAM

Surface Casing (if well will circulate)-Cemented to surface

CASING	SLURRY	FT. of FILL	CEMENT TYPE	SXS	EXCESS (%)	WEIGHT (ppg)	YIELD (ft ³ /sx)
8-5/8"	Lead	1500	65/35 POZ +6% Gel +10 pps gilsonite + .25 pps Flocele + 3% salt BWOW	462	35%	12.6	1.81
8-5/8"	Tail	500	Premium cmt +2% CaCl +.25 pps flocele	236	35%	15.6	1.18

A cement top job is required if cement fallback is greater than 10' below ground level. Top job cement will be premium cement w/2% CaCl. Volume as required.

Surface Casing (if well will not circulate)-Cemented to surface

CASING	SLURRY	FT. of FILL	CEMENT TYPE	SXS	EXCESS (%)	WEIGHT (ppg)	YIELD (ft ³ /sx)
8-5/8"	Lead	500	Premium cmt + 2% CaCl +.25 pps flocele	280	60	15.6	1.18
8-5/8"	Top job	As req.	Premium cement + 2% CaCl	Req.		15.6	1.18

Production Casing and Liner-Cemented TD to Surface

CASING	SLURRY	FT. of FILL	CEMENT TYPE	SXS	EXCESS (%)	WEIGHT (ppg)	YIELD (ft ³ /sx)
4-1/2"	Lead	2559	Premium Lite II +3% KCL +0.25 pps celloflake +5 pps gilsonite +10% gel +0.5% extender	293	60	11.0	3.38
4-1/2"	Tail	3510	50/50 POZ Class G +10% salt + 2% gel + 1% R-3	951	60	14.3	1.31

Cement volumes for the 4-1/2" Production Casing will be calculated to provide a top of cement to surface. Cement volumes are approximate and were calculated under the assumption that a gauge hole will be achieved. Actual cement volumes may vary due to variations in the actual hole size and will be determined by running a caliper log on the drilled hole.

All waiting on cement (WOC) times will be adequate to achieve a minimum of 500 psi compressive strength at the casing shoe prior to drilling out.

5. Drilling Fluids (mud) Program:

Interval	Mud Weight	Fluid Loss	Viscosity	Mud Type
0' - 2000'		No cntrl		Air/mist
2000'-3000'	8.4-8.6	No cntrl	28-36	Water
3000'-6069'	8.8-10.2	8 - 10 ml	32-42	Water/Gel

Sufficient mud material(s) to maintain mud properties, control lost circulation and contain a blowout will be available at the well site during drilling operations.

6. Evaluation Program:

Tests: No tests are currently planned.

Coring: No cores are currently planned.

Samples: None

Logging: Dual Induction – SFL /Gamma Ray Caliper: TD to Base Surface Casing
 Compensated Neutron/Litho Density Temperature/Gamma Ray: TD to Base Surface Casing
 Cement Bond Log / Gamma Ray: PBTD to Top of Cement

Stimulation: A stimulation or frac treatment will be designed for completion of this well based on openhole log analysis. The drill site, as approved, will be sufficient size to accommodate all completion activities.

7. Abnormal Conditions:

No abnormal temperatures or pressures are anticipated. No H₂S has been encountered or known to exist from previous wells drilled to similar depths in the general area.

Maximum anticipated bottom hole pressure equals approximately 3156 psi (calculated at 0.52 max psi/foot of hole) and maximum anticipated surface pressure equals approximately 1821 psi (anticipated bottom hole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot of hole).

8. Anticipated Starting Dates:

Anticipated Commencement Date- October 15, 2005
 Drilling Days- Approximately 10 days
 Completion Days - Approximately 10 days
 Anticipate location construction within 30 days of permit issue.

9. Variations:



None anticipated

10. Other:

A Cultural Resource Inventory and Paleontology reconnaissance shall be conducted for the well location, access route and pipeline. The reports shall be submitted to the Division of Oil, Gas and Mining and to the School and Institutional Trust Lands Administration upon their receipt.


3,000 PSI

BOF STACK

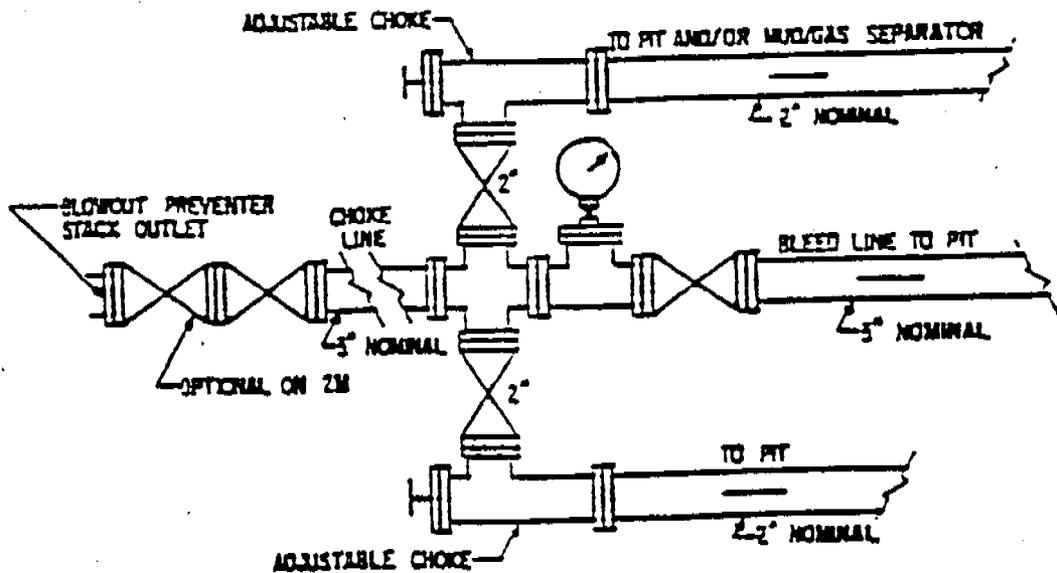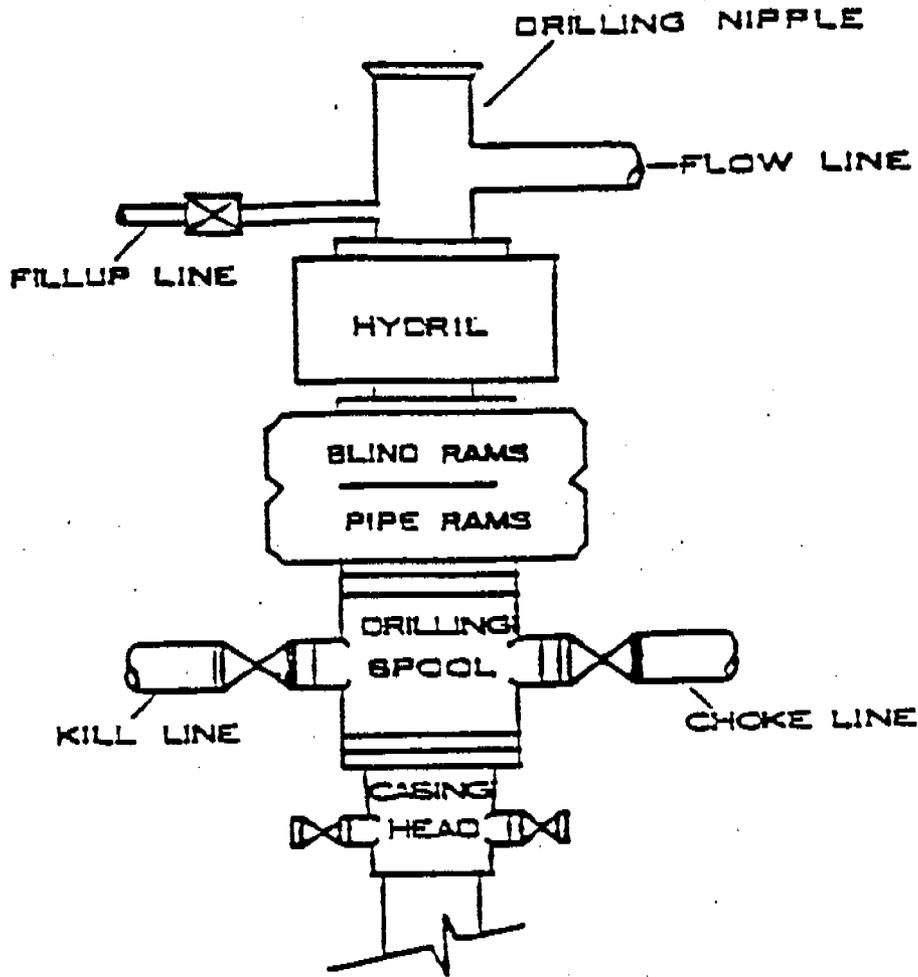

ENDURING RESOURCES

ARCHY BENCH 11-24-24-32
Section 32, T11S, R24E, S.L.B.&M.

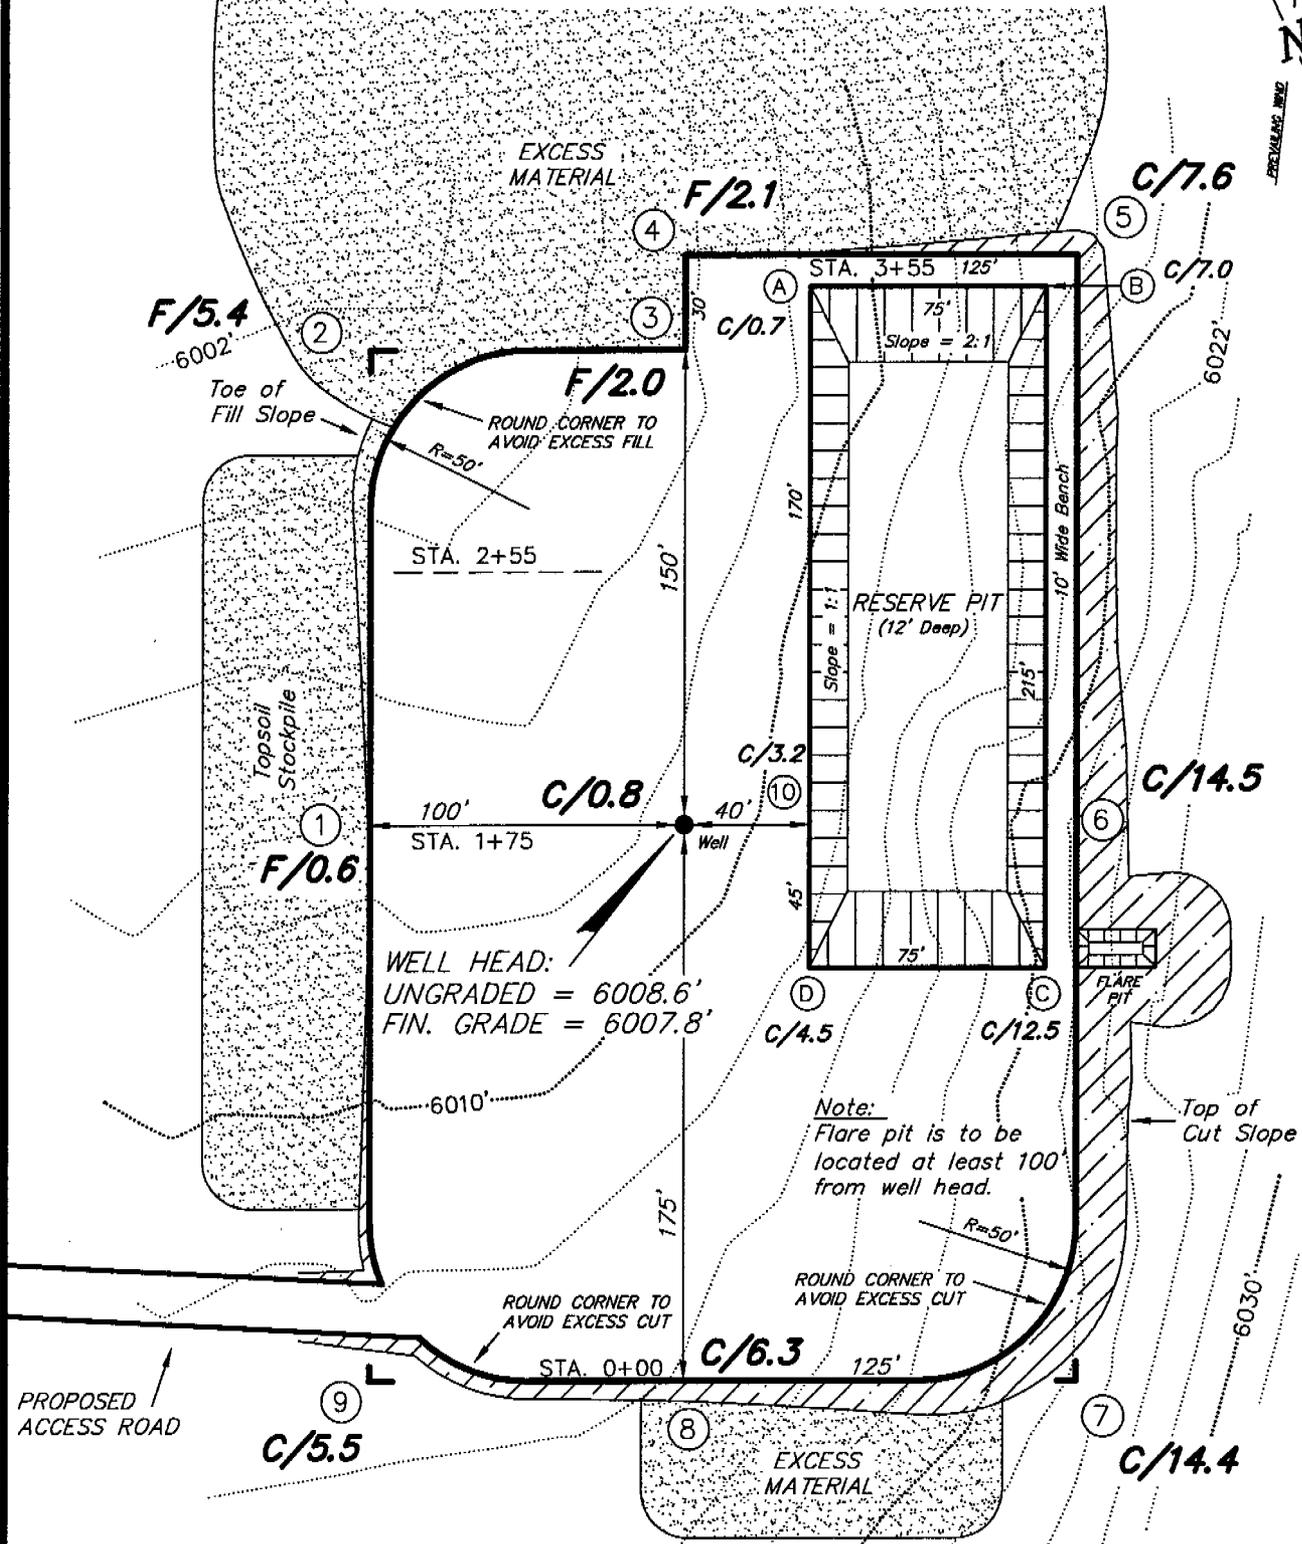

WELL HEAD:
UNGRADED = 6008.6'
FIN. GRADE = 6007.8'

Note:
Flare pit is to be located at least 100' from well head.

REFERENCE POINTS
150' NORTHWEST = 6007.9'
200' NORTHWEST = 6007.3'

SURVEYED BY: C.M.	DATE DRAWN: 7-21-05
DRAWN BY: F.T.M.	SCALE: 1" = 60'
NOTES:	





Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

SHEET
3
OF 9

ENDURING RESOURCES

CROSS SECTIONS

ARCHY BENCH 11-24-24-32

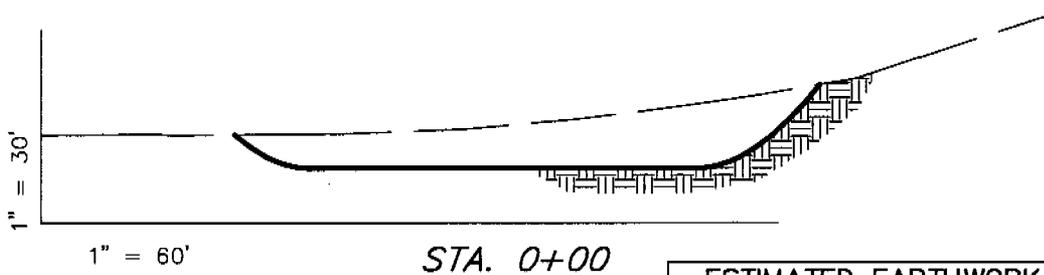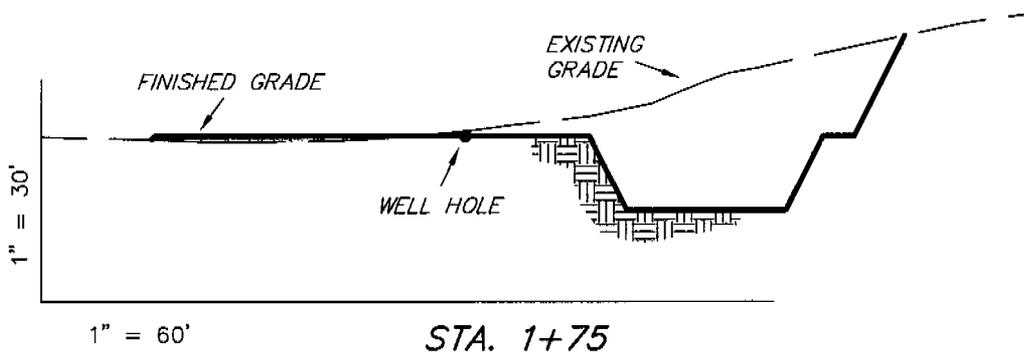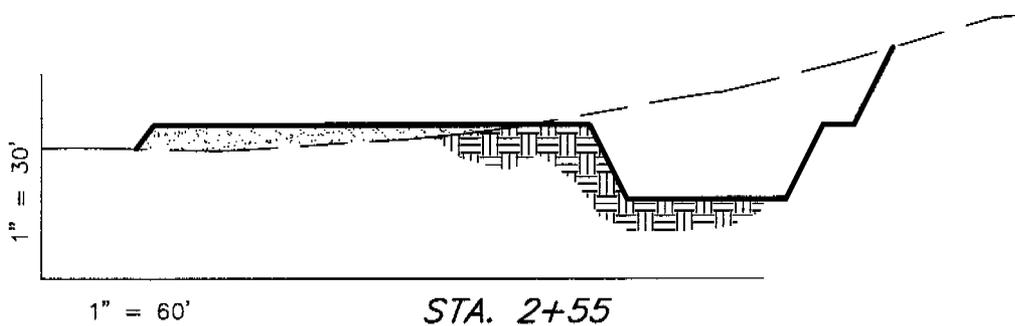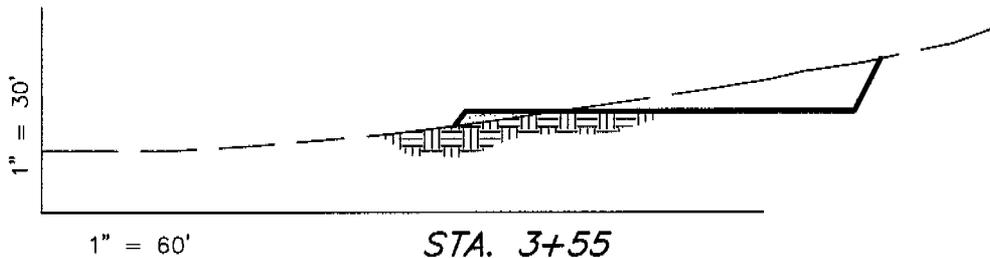

ESTIMATED EARTHWORK QUANTITIES (No Shrink or swell adjustments have been used) (Expressed in Cubic Yards)				
ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	12,490	1,880	Topsoil is not included in Pad Cut	10,610
PIT	5,390	0		5,390
TOTALS	17,880	1,880	1,580	16,000


NOTE:
UNLESS OTHERWISE NOTED
CUT SLOPES ARE AT 1:1
FILL SLOPES ARE AT 1.5:1

SURVEYED BY: C.M. DATE DRAWN: 7-21-05
DRAWN BY: F.T.M. SCALE: 1" = 60'
NOTES:

Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

SHEET
4
OF 9

ENDURING RESOURCES
TYPICAL RIG LAYOUT
ARCHY BENCH 11-24-24-32

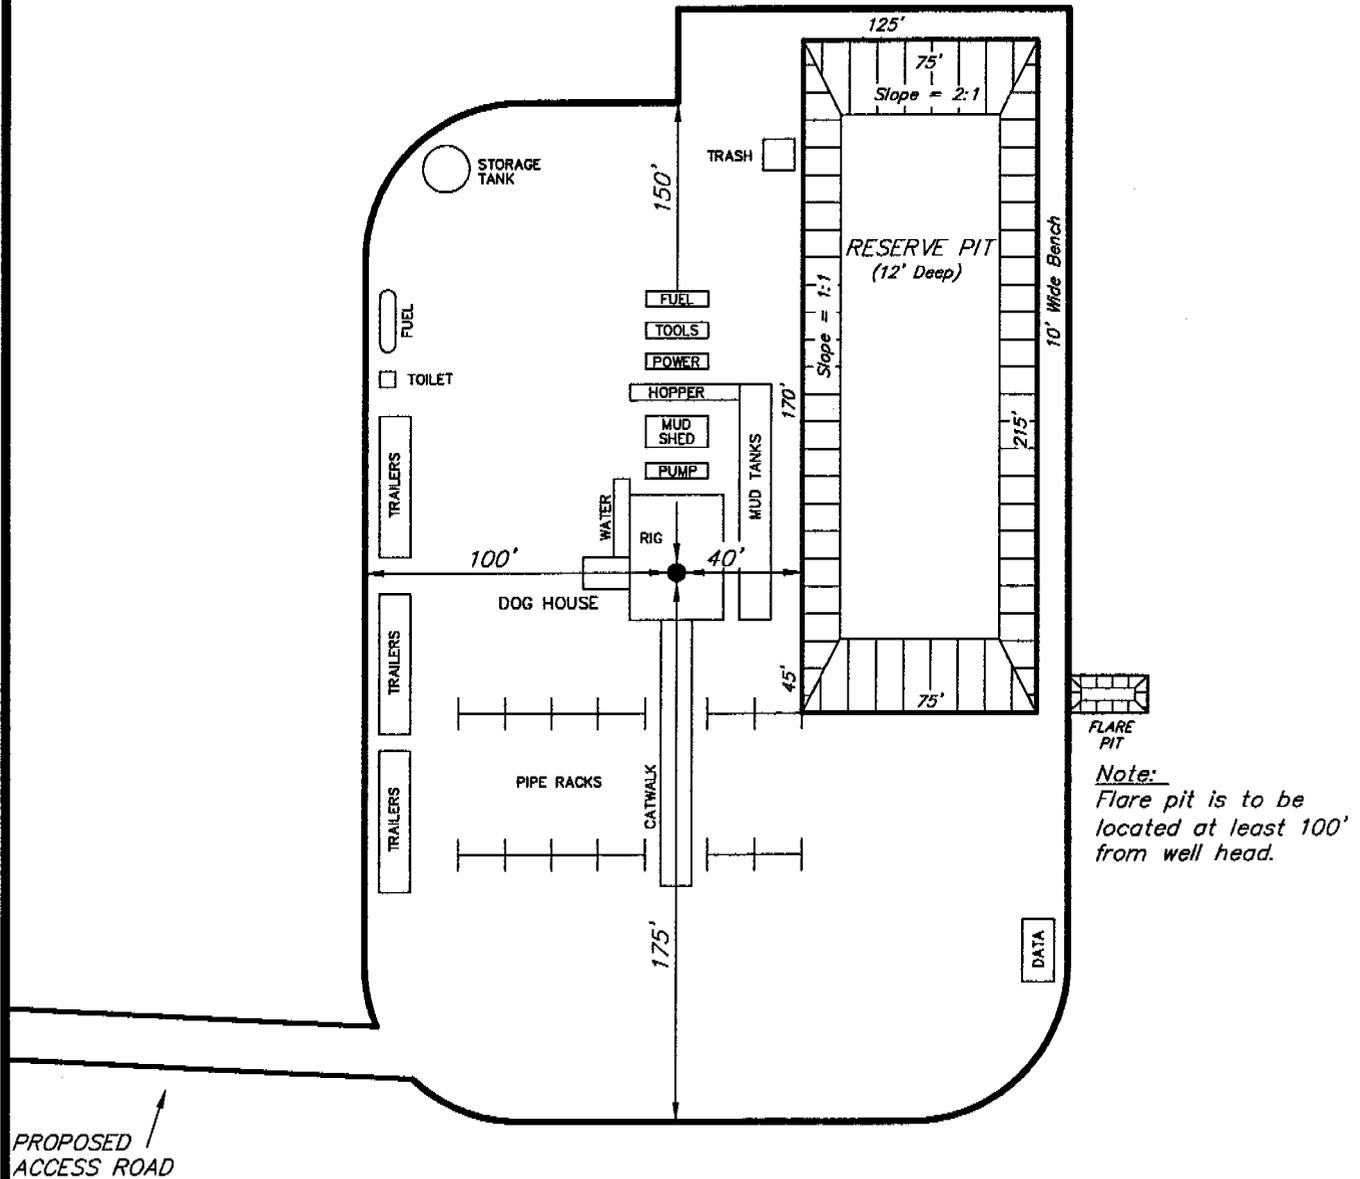

FLARE PIT

Note:
 Flare pit is to be located at least 100' from well head.

SURVEYED BY: C.M.	DATE DRAWN: 7-21-05
DRAWN BY: F.T.M.	SCALE: 1" = 60'
NOTES:	

Tri State
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

(435) 781-2501

SHEET
5
 OF 9

From: Ed Bonner
To: Whitney, Diana
Date: 9/22/2005 9:37:44 AM
Subject: Well Clearance

The following wells have been given cultural resource clearance by the Trust Lands Cultural Resources Group:

Enduring Resources, LLC
Archy Bench 11-24-12-32
Archy Bench 11-24-24-32
Rainbow 12-24-12-16
Rainbow 12-24-41-16

GLNA, LLC
Paradox Basin #1

The Houston Exploration Company
Little Pack Mountain 1-16-12-20
Little Pack Mountain 7-32-12-20

Quaneco, LLC
Murphy Ridge 7-32

Rosewood Resources
Stirrup State 7-32

Westport Oil & Gas Company
Bonanza 1023-2B (1 significant site which must be avoided)
Bonanza 1023-2D
Bonanza 1023-2H
Bonanza 1023-16J

XTO Energy Inc
State of Utah 17-8-18-14
State of Utah 17-8-18-12

If you have any questions regarding this matter please give me a call.

CC: Garrison, LaVonne; Hill, Brad; Hunt, Gil



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

September 22, 2005

Enduring Resources, LLC
475 17th St., Suite 1500
Denver, CO 80202

Re: Archy Bench 11-24-24-32 Well, 660' FSL, 1780' FWL, SE SW, Sec. 32,
T. 11 South, R. 24 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-36819.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
SITLA

Operator: Enduring Resources, LLC
Well Name & Number Archy Bench 11-24-24-32
API Number: 43-047-36819
Lease: ML-49762

Location: SE SW Sec. 32 T. 11 South R. 24 East

Conditions of Approval

1. **General**

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for Permit to Drill.

2. **Notification Requirements**

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- 24 hours prior to cementing or testing casing
- 24 hours prior to testing blowout prevention equipment
- 24 hours prior to spudding the well
- within 24 hours of any emergency changes made to the approved drilling program
- prior to commencing operations to plug and abandon the well

The following are Division of Oil, Gas and Mining contacts and their work telephone numbers (please leave a voice mail message if the person is not available to take the call):

- Dan Jarvis at (801) 538-5338
- Carol Daniels at (801) 538-5284 (spud)

3. **Reporting Requirements**

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. Compliance with the State of Utah Antiquities Act forbids disturbance of archeological, historical, or paleontological remains. Should archeological, historical or paleontological remains be encountered during your operations, you are required to immediately suspend all operations and immediately inform the Trust Lands Administration and the Division of State History of the discovery of such remains.

5. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)

6. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.
7. Surface casing shall be cemented to the surface.

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

Name of Company: ENDURING RESOURCES LLC

Well Name: ARCHY BENCH 11-24-24-32

Api No: 43-047-36819 Lease Type: STATE

Section 32 Township 11S Range 24E County UINTAH

Drilling Contractor PETE MARTIN'S RIG # BUCKET

SPUDDED:

Date 03/21/06

Time 8:00 AM

How DRY

Drilling will Commence: _____

Reported by DOUG HAMMOND

Telephone # 435-790-6996

Date 03/22/2006 Signed CHD

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: Enduring Resources, LLC Operator Account Number: N 2750
 Address: 475 17th Street, Suite 1500
city Denver
state CO zip 80202 Phone Number: (303) 350-5114

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304736819	Archy Bench 11-24-24-32		SESW	32	11S	24E	Uintah
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
A	99999	15249	3/21/2006		3/23/06		
Comments: <u>m VRD</u> CONFIDENTIAL J							

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
Comments:							

Well 3


API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
Comments:							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Alvin R. (AJ) Arlian

Name (Please Print)



Signature

Landman-Regulatory

3/22/2006

Title

Date

(5/2000)

RECEIVED

MAR 22 2006

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: ML 49762
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME: N/A
2. NAME OF OPERATOR: Enduring Resources, LLC		8. WELL NAME and NUMBER: Archy Bench 11-24-24-32
3. ADDRESS OF OPERATOR: 375 17th Street, Suite 1500 CITY Denver STATE CO ZIP 80202		9. API NUMBER: 4304736819
4. LOCATION OF WELL FOOTAGES AT SURFACE: 660' FSL - 1780' FWL S.L.B.& M.		10. FIELD AND POOL, OR WILDCAT: undesignated
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESW 32 11S 24E S		COUNTY: Uintah
		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: <u>3/21/2006</u>	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input checked="" type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Change Plans</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Change type of well planned...

FROM: Single Zone

TO: Multiple Zone

NAME (PLEASE PRINT) <u>Alvin R. (Al) Arlian</u>	TITLE <u>Landman - Regulatory Specialist</u>
SIGNATURE	DATE <u>3/21/2006</u>

(This space for State use only)

MAR 24 2006

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-49762
2. NAME OF OPERATOR: Enduring Resources, LLC		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A
3. ADDRESS OF OPERATOR: 375 17th Street, Suite 1500 CITY Denver STATE CO ZIP 80202		7. UNIT or CA AGREEMENT NAME: N/A
4. LOCATION OF WELL FOOTAGES AT SURFACE: 660' FSL - 1780' FWL S.L.B. & M.		8. WELL NAME and NUMBER: Archy Bench 11-24-24-32
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESW 32 11S 24E S		9. API NUMBER: 4304736819
COUNTY: Uintah STATE: UTAH		10. FIELD AND POOL, OR WILDCAT: undesignated

CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: 4/17/2006	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Change Plans</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Change total depth from permitted depth of 6,069' to 6,160', or less, to provide additional rat hole.

APPROVED BY OPERATOR
04-26-06
LHO

NAME (PLEASE PRINT) <u>Alvin R. (Al) Arlian</u>	TITLE <u>Landman - Regulatory Specialist</u>
SIGNATURE	DATE <u>4/17/2006</u>

(This space for State use only)

APPROVED BY THE STATE
OF UTAH
OIL, GAS AND MINING
DATE: 4/18/06 (See instructions on Reverse Side)
BY:

RECEIVED
APR 17 2006

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: ML 49762
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME: N/A
2. NAME OF OPERATOR: Enduring Resources, LLC		8. WELL NAME and NUMBER: Archy Bench 11-24-24-32
3. ADDRESS OF OPERATOR: 375 17th Street, Suite 1500 CITY Denver STATE CO ZIP 80202		9. API NUMBER: 4304736819
4. LOCATION OF WELL FOOTAGES AT SURFACE: 660' FSL - 1780' FWL S.L.B.& M.		10. FIELD AND POOL, OR WILDCAT: undesigned
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESW 32 11S 24E S		COUNTY: Uintah
		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: 4/18/2006	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input checked="" type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: Change Plans
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Change pipeline route (shorten).


Pipeline will only be about 900' long. All on-lease. Only the northwest portion of pipeline will be needed.

- The RockHopper Federal 29-11 pipeline has already been built., and
- Well will tie-in directly into RockHopper Federal 29-11 surface pipeline.

(2) Attachments... RockHopper Federal 29-11 pipeline route which has now been built, and Archy Bench 11-24-24-32 pipeline route which will now be shortened.

cc: SITLA

*5-1-06
CHD*


NAME (PLEASE PRINT) <u>Alvin R. (Al) Arlian</u>	TITLE <u>Landman - Regulatory Specialist</u>
SIGNATURE 	DATE <u>4/18/2006</u>

(This space for State use only)

**Accepted by the
Utah Division of
Oil, Gas and Mining
For Record Only** (See Instructions on Reverse Side)

**RECEIVED
APR 24 2006
DIV. OF OIL, GAS & MINING**

(5/2000)

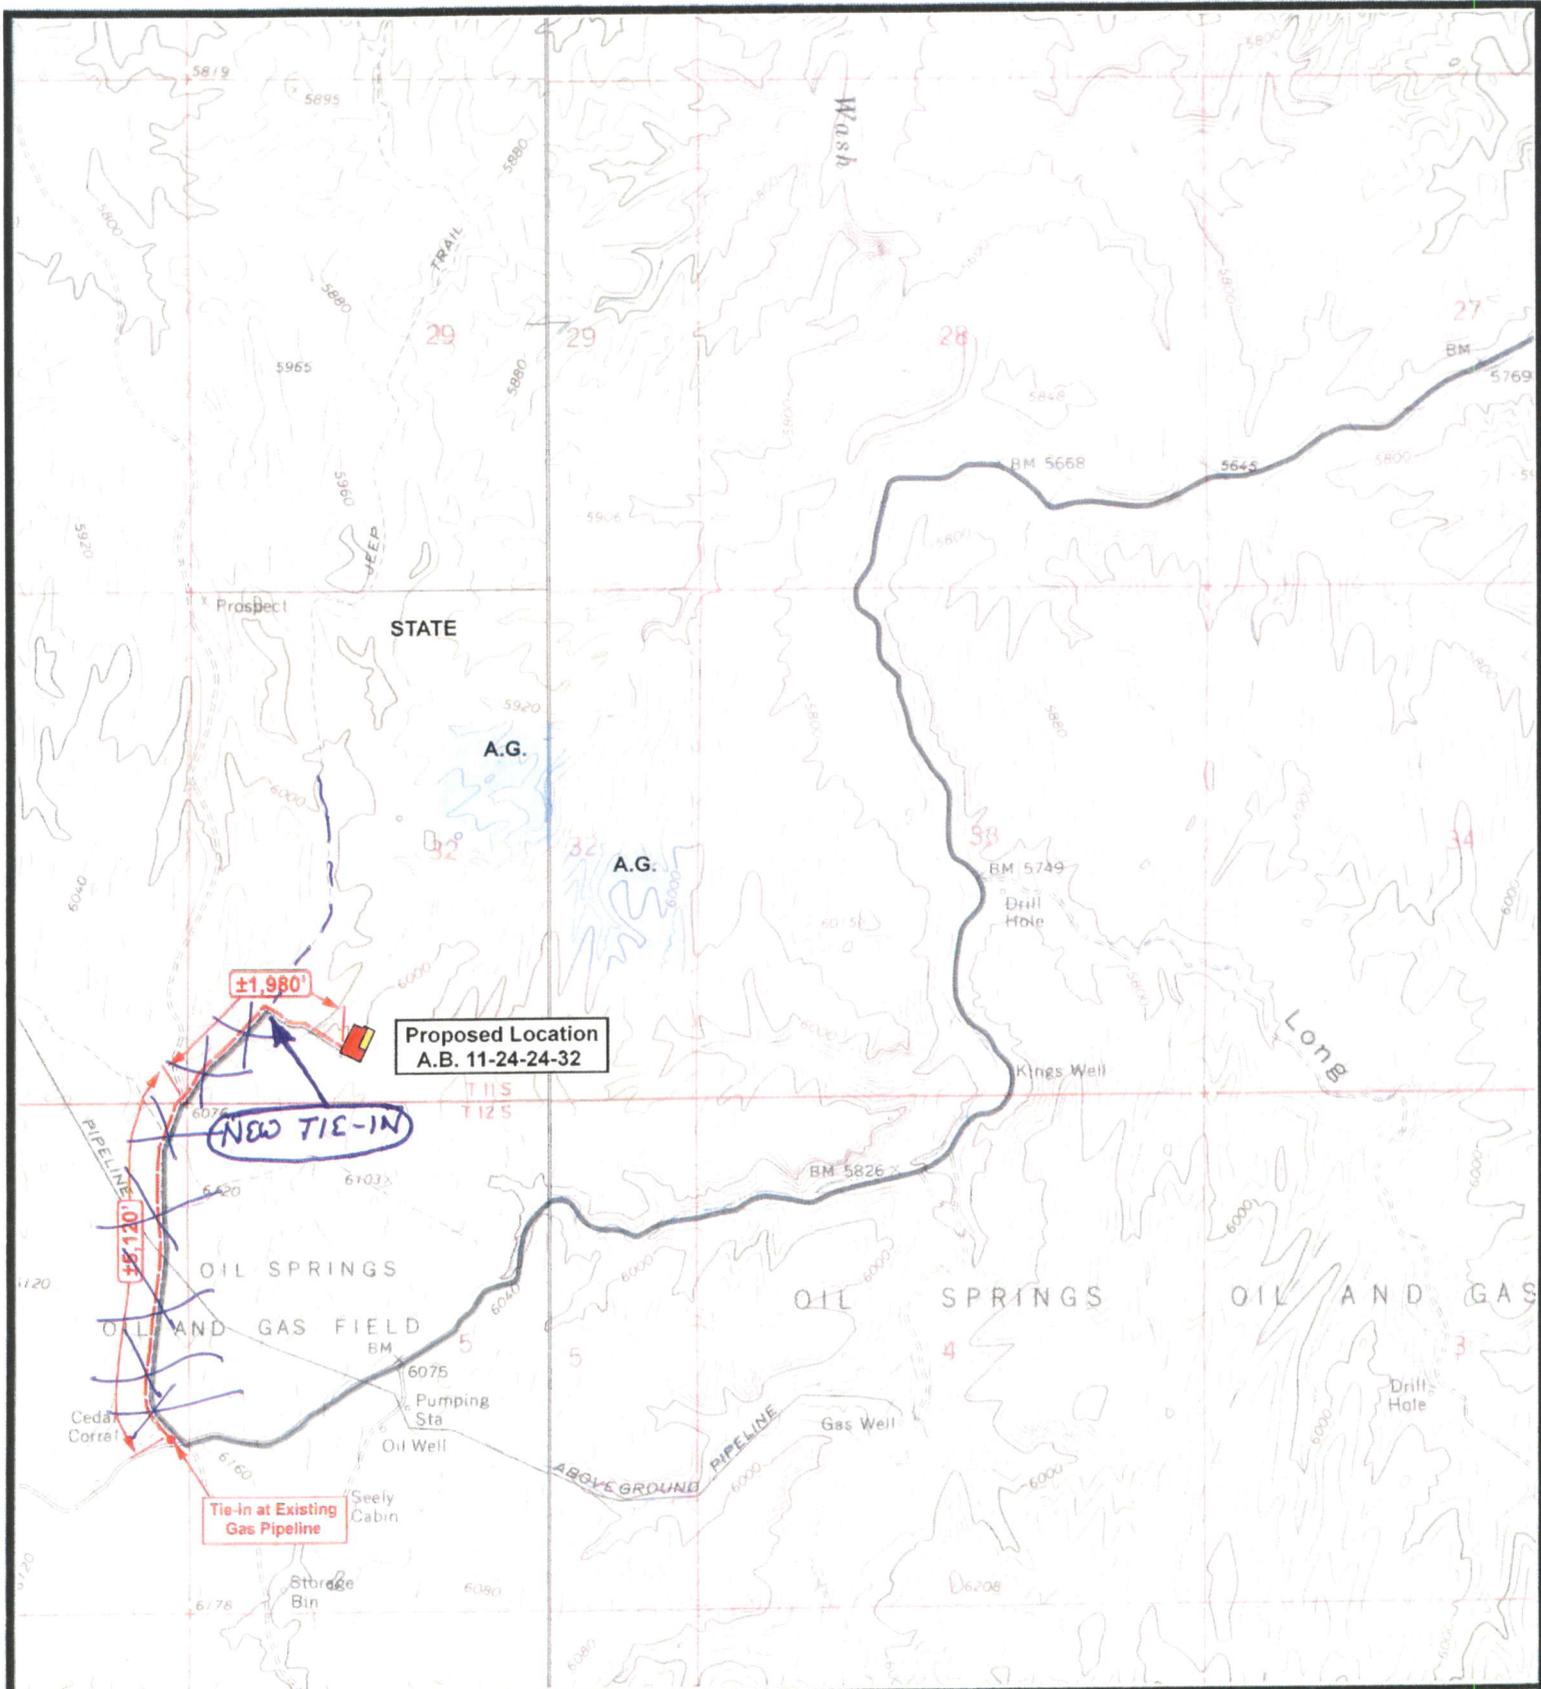

ENDURING RESOURCES

Archy Bench 11-24-24-32
Sec. 32, T11S, R24E, S.L.B.&M.



Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84076

SCALE: 1" = 2,000'
DRAWN BY: bgm
DATE: 06-29-2005

Legend

- Roads
- Proposed Gas Line

TOPOGRAPHIC MAP SHEET
"D" 9 OF 9

R 23 E
R 24 E

PROPOSED LOCATION:
ROCKHOPPER FEDERAL #29-11

PROPOSED ACCESS ROAD

PROPOSED PIPELINE

BUILT

NEW-TIE

T11S
T12S

EXISTING PIPELINE

TIE-IN POINT

APPROXIMATE TOTAL PIPELINE DISTANCE - 12,500' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- PROPOSED PIPELINE

McELVAIN OIL & GAS PROP., INC.

ROCKHOPPER FEDERAL #29-11
SECTION 29, T11S, R24E, S.1.B.&M.
1870' FSL, 1909' FWL

UEIS
Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP 11 02 04
MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: P.M. REVISED: 00-00-00

D
TOPO





State of Utah

School and Institutional
TRUST LANDS ADMINISTRATION

675 East 500 South, Suite 500
Salt Lake City, Utah 84102-2818
801-538-5100
801-355-0922 (Fax)
<http://www.trustlands.com>

Jon M. Huntsman, Jr.
Governor

Kevin S. Carter
Director

May 17, 2006

Division of Oil, Gas and Mining
1594 W. North Temple, Suite 1210
Salt Lake City, UT 84116

43,047,36819

RE: Sundry Notice Pipeline Route Change – Enduring Resources, LLC
Township 11 South, Range 24 East SLB&M
Section 32: (within)

To Whom It May Concern:

This letter is in response to the enclosed Sundry Notice regarding a change in the pipeline route to service the Archy Bench 11-24-24-32 well. The Trust Lands Administration, as the surface owner, approves of this change.

Sincerely,

Chris Fausett
Trust Lands Resource Specialist

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

RECEIVED
MAY 19 2006
DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

CONFIDENTIAL

AMENDED REPORT FORM 8
(highlight changes)

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. TYPE OF WELL: OIL WELL GAS WELL DRY OTHER _____

b. TYPE OF WORK: NEW WELL HORIZ. LATS. DEEP-EN RE-ENTRY DIFF. RESVR. OTHER _____

2. NAME OF OPERATOR: **Enduring Resources, LLC**

3. ADDRESS OF OPERATOR: **475 17th St, Suite 1500** CITY **Denver** STATE **CO** ZIP **80202** PHONE NUMBER: **(303) 573-1222**

4. LOCATION OF WELL (FOOTAGES)
AT SURFACE: **660' FSL - 1780' FWL S.L.B.& M.**
AT TOP PRODUCING INTERVAL REPORTED BELOW: **660' FSL - 1780' FWL S.L.B.& M.**
AT TOTAL DEPTH: **660' FSL - 1780' FWL S.L.B.& M.**

5. LEASE DESIGNATION AND SERIAL NUMBER: **ML-49762**

6. IF INDIAN, ALLOTTEE OR TRIBE NAME: **N/A**

7. UNIT or CA AGREEMENT NAME: **N/A**

8. WELL NAME and NUMBER: **Archy Bench 11-24-24-32**

9. API NUMBER: **4304736819**

10. FIELD AND POOL, OR WILDCAT: **undesignated**

11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: **SESW 32 11S 24E S**

12. COUNTY: **Uintah** 13. STATE: **UTAH**

14. DATE SPURRED: **4/14/2006** 15. DATE T.D. REACHED: **4/18/2006** 16. DATE COMPLETED: **5/30/2006** ABANDONED READY TO PRODUCE

17. ELEVATIONS (DF, RKB, RT, GL): **6024.6 RKB**

18. TOTAL DEPTH: MD **6,084** TVD **6,084** 19. PLUG BACK T.D.: MD **6,067** TVD **6,067** 20. IF MULTIPLE COMPLETIONS, HOW MANY? **6**

21. DEPTH BRIDGE MD **5,852** TVD **5,852** PLUG SET:

22. TYPE ELECTRIC AND OTHER MECHANICAL LOGS RUN (Submit copy of each): **Previously Submitted.**

23. WAS WELL CORED? NO YES (Submit analysis)
WAS DST RUN? NO YES (Submit report)
DIRECTIONAL SURVEY? NO YES (Submit copy)

24. CASING AND LINER RECORD (Report all strings set in well)

HOLE SIZE	SIZE/GRADE	WEIGHT (#/ft.)	TOP (MD)	BOTTOM (MD)	STAGE CEMENTER DEPTH	CEMENT TYPE & NO. OF SACKS	SLURRY VOLUME (BBL)	CEMENT TOP **	AMOUNT PULLED
20"	14"	Line Pipe	0	40		3 yards		0 (CIR)	0
12-1/4"	8-5/8 J-55	32#	16	1,987		CL G 717	256	0 (CIR)	0
7-7/8"	4.5 N-80	11.6#	16	6,079		CL G 1,235	280	0 (CIR)	0

25. TUBING RECORD

SIZE	DEPTH SET (MD)	PACKER SET (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
2-3/8"	5,655							

26. PRODUCING INTERVALS

FORMATION NAME	TOP (MD)	BOTTOM (MD)	TOP (TVD)	BOTTOM (TVD)	INTERVAL (Top/Bot - MD)	SIZE	NO. HOLES	PERFORATION STATUS
(A) Wasatch	3,223	3,877			3,223 3,877	1'slot	2	Open <input checked="" type="checkbox"/> Squeezed <input type="checkbox"/>
(B) Mesaverde	4,204	5,816			4,204 5,816	1'slot	4	Open <input checked="" type="checkbox"/> Squeezed <input type="checkbox"/>
(C)								Open <input type="checkbox"/> Squeezed <input type="checkbox"/>
(D)								Open <input type="checkbox"/> Squeezed <input type="checkbox"/>

27. PERFORATION RECORD

28. ACID, FRACTURE, TREATMENT, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL	AMOUNT AND TYPE OF MATERIAL
3223' - 3877'	Placed 102,933 lbs 20/40 Ottawa Sand in 2 Wasatch Formations
4204' - 5816'	Placed 206,233 lbs 20/40 Ottawa Sand in 4 Mesaverde Formations

29. ENCLOSED ATTACHMENTS:

- ELECTRICAL/MECHANICAL LOGS GEOLOGIC REPORT DST REPORT DIRECTIONAL SURVEY
 SUNDRY NOTICE FOR PLUGGING AND CEMENT VERIFICATION CORE ANALYSIS OTHER: _____

30. WELL STATUS:

SHUT-IN

RECEIVED

AUG 16 2006

31. INITIAL PRODUCTION

INTERVAL A (As shown in item #26)

DATE FIRST PRODUCED:		TEST DATE:		HOURS TESTED:		TEST PRODUCTION RATES: →	OIL - BBL: 0	GAS - MCF: 0	WATER - BBL: 0	PROD. METHOD:
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL - BBL:	GAS - MCF:	WATER - BBL:	INTERVAL STATUS: SHUT-IN

INTERVAL B (As shown in item #26)

DATE FIRST PRODUCED:		TEST DATE:		HOURS TESTED:		TEST PRODUCTION RATES: →	OIL - BBL:	GAS - MCF:	WATER - BBL:	PROD. METHOD:
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL - BBL:	GAS - MCF:	WATER - BBL:	INTERVAL STATUS:

INTERVAL C (As shown in item #26)

DATE FIRST PRODUCED:		TEST DATE:		HOURS TESTED:		TEST PRODUCTION RATES: →	OIL - BBL:	GAS - MCF:	WATER - BBL:	PROD. METHOD:
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL - BBL:	GAS - MCF:	WATER - BBL:	INTERVAL STATUS:

INTERVAL D (As shown in item #26)

DATE FIRST PRODUCED:		TEST DATE:		HOURS TESTED:		TEST PRODUCTION RATES: →	OIL - BBL:	GAS - MCF:	WATER - BBL:	PROD. METHOD:
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL - BBL:	GAS - MCF:	WATER - BBL:	INTERVAL STATUS:

32. DISPOSITION OF GAS (Sold, Used for Fuel, Vented, Etc.)

33. SUMMARY OF POROUS ZONES (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

34. FORMATION (Log) MARKERS:

Formation	Top (MD)	Bottom (MD)	Descriptions, Contents, etc.	Name	Top (Measured Depth)
Uteland Butte	2,392				
Wasatch	2,465				
Mesaverde	3,971				

35. ADDITIONAL REMARKS (include plugging procedure)

Subject well has not produced any hydrocarbons or water since completion.

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records.

NAME (PLEASE PRINT) Christian Veillette TITLE Engineer
 SIGNATURE *Christian Veillette* DATE 8/11/2006

This report must be submitted within 30 days of

- completing or plugging a new well
- drilling horizontal laterals from an existing well bore
- recompleting to a different producing formation
- reentering a previously plugged and abandoned well
- significantly deepening an existing well bore below the previous bottom-hole depth
- drilling hydrocarbon exploratory holes, such as core samples and stratigraphic tests

* ITEM 20: Show the number of completions if production is measured separately from two or more formations.

** ITEM 24: Cement Top - Show how reported top(s) of cement were determined (circulated (CIR), calculated (CAL), cement bond log (CBL), temperature survey (TS)).

Send to: Utah Division of Oil, Gas and Mining
 1594 West North Temple, Suite 1210
 Box 145801
 Salt Lake City, Utah 84114-5801

Phone: 801-538-5340
 Fax: 801-359-3940

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: ML 49762
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME: N/A
2. NAME OF OPERATOR: Enduring Resources, LLC		8. WELL NAME and NUMBER: Archy Bench 11-24-24-32
3. ADDRESS OF OPERATOR: 375 17th Street, Suite 1500 CITY Denver STATE CO ZIP 80202		9. API NUMBER: 4304736819
		10. FIELD AND POOL, OR WILDCAT: undesigned
4. LOCATION OF WELL FOOTAGES AT SURFACE: 660' FSL - 1780' FWL S.L.B.& M. COUNTY: Uintah		
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESW 32 11S 24E S STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: 11/9/2007	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input checked="" type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: Pit Closed and Reseeded
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

11-9-2007 Pit has been backfilled and reseeded.

NAME (PLEASE PRINT) <u>Alvin R. (Al) Arlian</u>	TITLE <u>Landman - Regulatory Specialist</u>
SIGNATURE	DATE <u>11/9/2007</u>

(This space for State use only)

RECEIVED
NOV 14 2007
DIV. OF OIL, GAS & MINING

Page 2
Mr. Arlian
July 30, 2008

For extended SI/TA consideration the operator shall provide the Division with the following:


1. Reasons for SI/TA of the well (R649-3-36-1.1).
2. The length of time the well is expected to be SI/TA (R649-3-36-1.2), and
3. An explanation and supporting data if necessary, for showing the well has integrity, meaning that the casing, cement, equipment condition, static fluid level, pressure, existence or absence of Underground Sources of Drinking Water and other factors do not make the well a risk to public health and safety or the environment (R649-3-36-1.3)

Submitting the information suggested below may help show well integrity and may help qualify your well for extended SI/TA. **Note: As of July 1, 2003, wells in violation of the SI/TA rule R649-3-36 may be subject to full cost bonding (R649-3-1-4.2, 4.3).**

1. Wellbore diagram, and
2. Copy of recent casing pressure test, and
3. Current pressures on the wellbore (tubing pressure, casing pressure, and casing/casing annuli pressure) showing wellbore has integrity, and
4. Fluid level in the wellbore, and
5. An explanation of how the submitted information proves integrity.

If the required information is not received within 30 days of the date of this notice, further actions will be initiated. If you have any questions concerning this matter, please contact me at (801) 538-5281.

Sincerely,



Dustin K. Doucet
Petroleum Engineer

JP:js
Enclosure

cc: Compliance File
Well File
Jim Davis, SITLA

Attachment A

	Well Name	API	Lease Type	Years Inactive
1	DWR 12-23-13-22	4304733345	FEE	7 YEARS 6 MONTHS
2	DWR 12-23-34-16	4304733346	FEE	7 YEARS 3 MONTHS
3	DWR 12-23-41-21	4304733480	FEE	8 YEARS 1 MONTH
4	DWR 12-23-13-28	4304733481	FEE	7 YEARS 8 MONTHS
5	DWR 12-23-24-16	4304733482	FEE	8 YEARS 1 MONTH
6	DWR 12-23-24-28	4304733483	FEE	7 YEARS 8 MONTHS
7	DWR 12-23-31-21	4304733484	FEE	8 YEARS 2 MONTHS
8	DWR 12-23-42-29	4304733487	FEE	7 YEARS 11 MONTHS
9	DWR 12-23-44-16	4304733489	FEE	7 YEARS 8 MONTHS
10	QUEST 11-25-13-21	4304733935	FEE	4 YEARS 6 MONTHS
11	QUEST 11-25-24-10	4304734118	FEE	7 YEARS 0 MONTHS
12	QUEST 11-25-31-28	4304735310	FEE	4 YEARS 4 MONTHS
13	QUEST 11-25-34-21	4304735297	FEE	4 YEARS 4 MONTHS
14	QUEST 11-25-11-27	4304735298	FEE	4 YEARS 5 MONTHS
15	QUEST 11-25-14-22	4304735299	FEE	2 YEARS 9 MONTHS
16	HOSS 9-25-34-20	4304734756	ML-45558	2 YEARS 7 MONTHS
17	BONANZA 9-24-22-36	4304735860	ML-46527	2 YEARS 6 MONTHS
18	BONANZA 9-24-11-36	4304735861	ML-46527	1 YEAR 5 MONTHS
19	BONANZA 9-25-13-20	4304735929	ML-45558	2 YEARS 11 MONTHS
20	RAINBOW 11-24-31-16	4304736184	ML-47080	1 YEAR 1 MONTH
21	SOUTHAM CYN 10-25-21-32	4304736421	ML 47065	1 YEAR 10 MONTHS
22	AGENCY DRAW 12-21-31-36	4304736424	ML 47086	2 YEARS 1 MONTH
23	BONANZA 9-24-32-22	4304736753	FEE	2 YEARS 6 MONTHS
24	ARCHY BENCH 12-23-22-16	4304736800	ML-48957	2 YEARS 0 MONTHS
25	ARCHY BENCH 11-24-24-32	4304736819	ML-49762	1 YEAR 4 MONTHS
26	ASPHALT WASH 11-24-42-16	4304736875	ML47080	2 YEARS 2 MONTHS
27	SOUTHAM CYN 9-24-23-36	4304736880	FEE	1 YEARS 1 MONTH
28	SOUTHAM CYN 10-25-11-6	4304736933	FEE	1 YEAR 3 MONTHS
29	BUCK CYN 12-21-43-16	4304737091	ML-47085	2 YEARS 9 MONTHS



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

July 30, 2008

CERTIFIED MAIL NO.: 7004 2510 0004 1824 5834

Mr. Alvin Arlian
Enduring Resources, LLC
475 17th Street, Suite 1500
Denver, CO 80202

43 047 36819
Archy Bench 11-24-24-32
11S 24E 32

Re: Extended Shut-in and Temporarily Abandoned Requirements for Wells on Fee or State Leases

Dear Mr. Arlian:

Enduring Resources, LLC has eighteen (18) Fee Lease Wells and eleven (11) Mineral Lease Wells (see attachment A) that are currently in non-compliance for extended shut-in and temporary abandonment (SI/TA) status. Wells SI/TA beyond twelve (12) consecutive months require the filing of a Sundry Notice in accordance with R649-3-36-1 for Utah Division of Oil, Gas & Mining ("Division") approval. Wells with five (5) years non-activity or non-productivity shall be plugged, unless the Division grants approval for extended shut-in time upon a showing of good cause by the operator (R649-3-36-1.3.3).

This is a second notice of non-compliance for wells 1 through 14 listed on Attachment A. The Division notified the previous operators, TCC Royalty, Ranken Energy, Mak-J Energy and Houston Exploration, on several occasions by certified mail about these wells non-compliance issues. Several plans to produce or plug were submitted, but no action has been taken to date on these wells. It has also come to the Divisions attention that Enduring no longer holds a valid lease for the DWR wells (wells 1 through 9 on Attachment A). Immediate action is required on these wells. The Division feels that sufficient time has passed to make a decision on these wells. Please submit your plans to produce or plug these wells. If this is not addressed within 30 days, a Notice of Violation will be issued for these wells. A similar response is required for the other fifteen wells listed in Attachment A.



STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

		5. LEASE DESIGNATION AND SERIAL NUMBER: ML 49762
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A
		7. UNIT or CA AGREEMENT NAME: N/A
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		8. WELL NAME and NUMBER: Archy Bench 11-24-24-32
2. NAME OF OPERATOR: Enduring Resources, LLC		9. API NUMBER: 4304736819
3. ADDRESS OF OPERATOR: 375 17th Street, Suite 1500 CITY Denver STATE CO ZIP 80202		10. FIELD AND POOL, OR WILDCAT: undesigned
4. LOCATION OF WELL FOOTAGES AT SURFACE: 660' FSL - 1780' FWL S.L.B. & M. COUNTY: Uintah QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESW 32 11S 24E S STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Well Status Report</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

This well has 29 psig SITP and 28 psig SICP in August 2008.

Enduring is requesting a 30 day extension to finish up an evaluation of this well. There appear to be behind pipe Green River zones at 2814-35', 3114-18' & 3185-94'.

COPY SENT TO OPERATOR

Date: 1. 28. 2009

Initials: KS

NAME (PLEASE PRINT) <u>Alvin R. (Al) Arlian</u>	TITLE <u>Landman - Regulatory Specialist</u>
SIGNATURE	DATE <u>8/29/2008</u>

(This space for State use only)


**APPROVED BY THE STATE
OF UTAH DIVISION OF
OIL, GAS, AND MINING**
DATE: 1/27/09
BY: Dickinson (See Instructions on Reverse Side)

RECEIVED
SEP 04 2008
DIV. OF OIL, GAS & MINING



ARCHY BENCH 11-24-24-32: 8/27/2008 (KB-Grd: 16.0ft)

ftKB (MD) Schematic - Actual

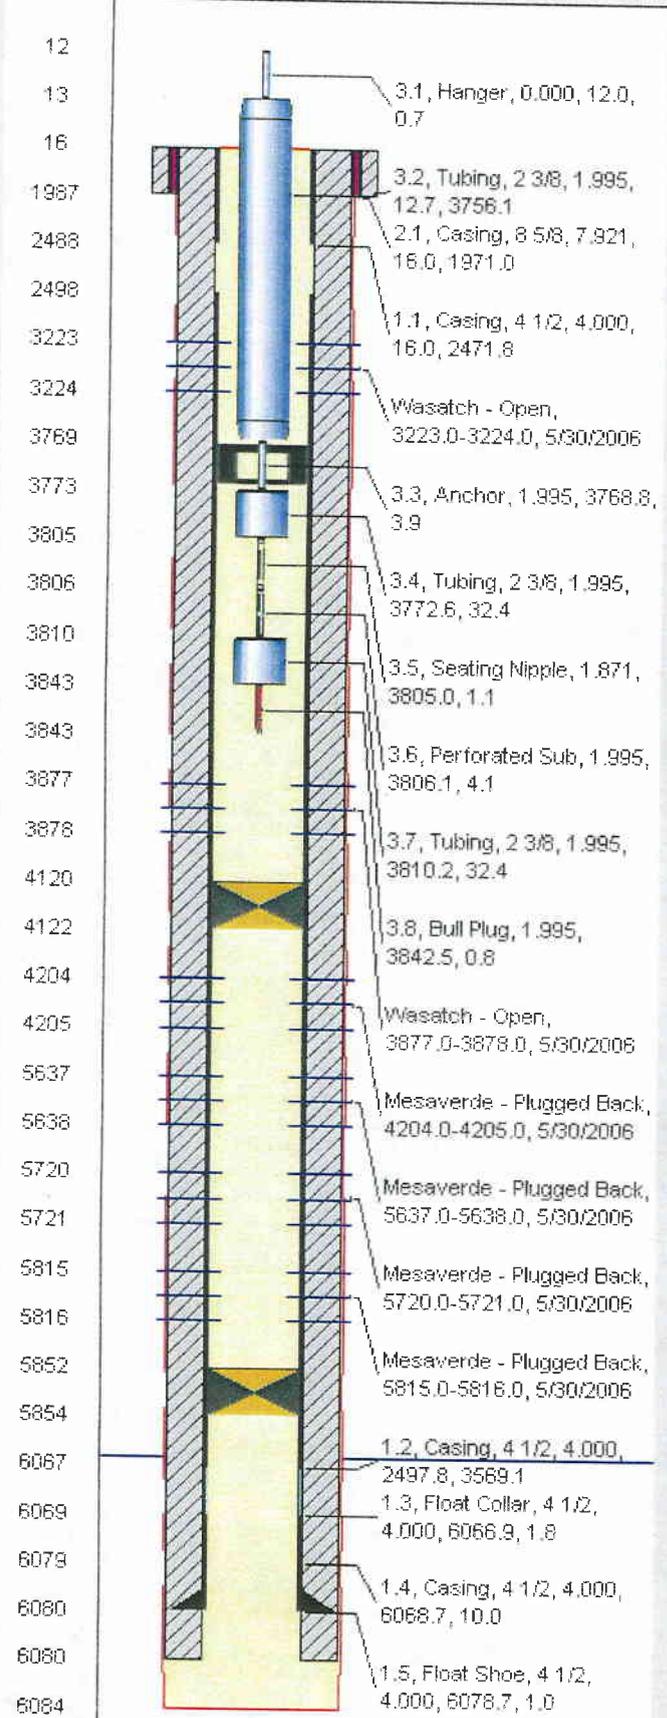

WellName										WellUserID	
ARCHY BENCH 11-24-24-32										UT0104.01	
APICode						County					
430473681900						UINTAH, UT					
Sec	Twn	Rge	Qtr1	Qtr2	Qtr3	XLoc	YLoc	Latitude	Longitude		
32	11S	24E		SE	SW						
1780 Feet From			W Line		660 Feet From			S Line			
Engineer				Technician				Pumper			
Alex Clough								TR4,			
SpudDate		Comp Date		KB Height		TD Drill Dept		TD Log Dept		TVD	
4/14/2006				16		6084		0		0	

Casing									
Date In	Casing Type	Hole Dia	Size	Wt	Grade	Depth	Jts	Ft	
4/22/2005	. Production	7.875	4.500	11.60	N-80	5079.65	44.0	6060.89	
4/5/2006	3. Surface	12.250	8.625	32.00	J-55	1987.00	14.00	0.00	

Tubing									
Date In	Size	Wt	Grade	Cou OD	ID	Depth	Avg Jt	Intake	
10/11/2006	2.375	4.7	J-55	3.063	1.995	3843	32.38	3806	

Sucker Rods

Formations

Perforations								
Upper	Lower	Formation	Date	Status	Gun Sz	Shot/Ft	Phasg	
3223	3224	Wasatch	5/30/2006	Open	3 3/8"	3	120	
3877	3878	Wasatch	5/30/2006	Open	3 3/8"	3	120	
4204	4205	Mesaverde	5/30/2006	ugged Ba	3 3/8"	3	120	
5637	5638	Mesaverde	5/30/2006	ugged Ba	3 3/8"	3	120	
5720	5721	Mesaverde	5/30/2006	ugged Ba	3 3/8"	3	120	
5815	5816	Mesaverde	5/30/2006	ugged Ba	3 3/8"	3	120	

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: ML 49762
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME: N/A
2. NAME OF OPERATOR: Enduring Resources, LLC		8. WELL NAME and NUMBER: Archy Bench 11-24-24-32
3. ADDRESS OF OPERATOR: 375 17th Street, Suite 1500 CITY Denver STATE CO ZIP 80202		9. API NUMBER: 4304736819
4. LOCATION OF WELL FOOTAGES AT SURFACE: 660' FSL - 1780' FWL S.L.B.& M.		10. FIELD AND POOL, OR WILDCAT: undesignated
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESW 32 11S 24E S		COUNTY: Uintah
		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: 1/5/2009	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Well Status Report</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Shut-in, waiting re-completion attempt review.

NAME (PLEASE PRINT) <u>Alvin R. (Al) Arlian</u>	TITLE <u>Landman - Regulatory Specialist</u>
SIGNATURE <u></u>	DATE <u>1/5/2009</u>

(This space for State use only)

RECEIVED
JAN 08 2009
DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: ML 49762
2. NAME OF OPERATOR: Enduring Resources, LLC		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A
3. ADDRESS OF OPERATOR: 375 17th Street, Suite 1500 CITY Denver STATE CO ZIP 80202		7. UNIT or CA AGREEMENT NAME: N/A
4. LOCATION OF WELL FOOTAGES AT SURFACE: 660' FSL - 1780' FWL S.L.B. & M. COUNTY: Uintah		8. WELL NAME and NUMBER: Archy Bench 11-24-24-32
PHONE NUMBER: (303) 350-5114		9. API NUMBER: 4304736819
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESW 32 11S 24E S STATE: UTAH		10. FIELD AND POOL, OR WILDCAT: undesignated

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: 1/30/2009	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Well Status Report</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Shut-in, waiting re-completion attempt review for next summer.

NAME (PLEASE PRINT) <u>Alvin R. (Al) Arlian</u>	TITLE <u>Landman - Regulatory Specialist</u>
SIGNATURE	DATE <u>1/30/2009</u>

(This space for State use only)

RECEIVED

FEB 03 2009

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

		5. LEASE DESIGNATION AND SERIAL NUMBER: ML 49762
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A
		7. UNIT or CA AGREEMENT NAME: N/A
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		8. WELL NAME and NUMBER: Archy Bench 11-24-24-32
2. NAME OF OPERATOR: Enduring Resources, LLC		9. API NUMBER: 4304736819
3. ADDRESS OF OPERATOR: 375 17th Street, Suite 1500 CITY Denver STATE CO ZIP 80202		10. FIELD AND POOL, OR WILDCAT: undesignated
PHONE NUMBER: (303) 350-5114		
4. LOCATION OF WELL FOOTAGES AT SURFACE: 660' FSL - 1780' FWL S.L.B.& M. _____		COUNTY: Uintah
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESW 32 11S 24E S		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: 4/1/2009	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Well Status Report</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

MONTHLY WELL STATUS REPORT:

This well shall continue to be shut-in for the month of April, 2009.

1. Enduring is preparing an "Action Plan" for this and other shut-in wells.
2. By May 1, 2009, the Action Plan is to be submitted for the approval of the DOG&M.

NAME (PLEASE PRINT) <u>Alvin R. (Al) Arlian</u>	TITLE <u>Landman - Regulatory Specialist</u>
SIGNATURE	DATE <u>3/30/2009</u>

(This space for State use only)

RECEIVED
APR 02 2009

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: ML-49762
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: ARCHY BENCH 11-24-24-32
2. NAME OF OPERATOR: Enduring Resources, LLC	9. API NUMBER: 43047368190000
3. ADDRESS OF OPERATOR: 475 17th Street, Suite 1500 , Denver, CO, 80202	PHONE NUMBER: 303 350-5114 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0660 FSL 1780 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 32 Township: 11.0S Range: 24.0E Meridian: S	9. FIELD and POOL or WILDCAT: OIL SPRINGS COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 5/29/2009	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input checked="" type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: Monthly Status Report

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
 5-29-2009 Pursuant to an Action Plan submitted to DOG&M May-2009, this well shall continue to be shut-in while six other wells are being plugged commencing June-2009.

Accepted by the
 Utah Division of
 Oil, Gas and Mining
FOR RECORD ONLY
 June 01, 2009

NAME (PLEASE PRINT) Alvin Arlian	PHONE NUMBER 303 350-5114	TITLE Landman-Regulatory
SIGNATURE N/A		DATE 5/29/2009

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: ML-49762
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: ARCHY BENCH 11-24-24-32
2. NAME OF OPERATOR: Enduring Resources, LLC	9. API NUMBER: 43047368190000
3. ADDRESS OF OPERATOR: 475 17th Street, Suite 1500 , Denver, CO, 80202	PHONE NUMBER: 303 350-5114 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0660 FSL 1780 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 32 Township: 11.0S Range: 24.0E Meridian: S	9. FIELD and POOL or WILDCAT: OIL SPRINGS COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input checked="" type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: Monthly Status Report
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 6/30/2009			
<input type="checkbox"/> SPUD REPORT Date of Spud:			
<input type="checkbox"/> DRILLING REPORT Report Date:			

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

6-30-2009 Pursuant to an Action Plan submitted to and approved by the DOG&M in May-2009, this well shall continue to be shut-in while six other wells are being plugged commencing June-2009.

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
 June 30, 2009

NAME (PLEASE PRINT) Alvin Arlian	PHONE NUMBER 303 350-5114	TITLE Landman-Regulatory
SIGNATURE N/A		DATE 6/30/2009



GARY R. HERBERT
Governor

SPENCER J. COX
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

September 4, 2014

CERTIFIED MAIL NO.: 7011 2970 0001 8828 1610

Mr. John Conley
Enduring Resources, LLC
511 16TH Street STE 700
Denver, CO 80202

43 047 36819
Archy Bench 11-24-24-32
32 115 24E

Subject: Extended Shut-in and Temporary Abandoned Well Requirements for Fee or State Leases

Dear Mr. Conley:

As of April 2014, Enduring Resources, LLC (Enduring) has twenty (20) State Lease Wells and six (6) Fee Lease Wells (see attachment A) that are currently in non-compliance with the requirements for extended shut-in or temporarily abandoned (SI/TA) status. Four (4) wells in 2013 and seven (7) wells in 2014 were added to Enduring's SI/TA list.

Several of these wells (attachment A) have previously been issued notices of non-compliance and have remained in non-compliance. The Division has worked with Enduring to reduce the immense amount of wells that were in non-compliance. In 2010 Enduring provided the Division with a list of wells to be plugged (attachment A), and the Division recognizes that Enduring most recently plugged a number of wells in 2012. However in 2013 only two wells were plugged while four (4) additional wells were added, while nothing has been done in 2014 on any of the wells. Enduring never submitted plugging procedures for the remaining wells listed to be plugged and therefore has not followed through with these plans to bring these wells or any other wells into compliance.

Enduring shall immediately submit plans and timeframes for each well stating which wells will be plugged, placed back on production, or requesting SI/TA extension with proof of wellbore integrity and good cause for such request. All wells need an individual sundry filed and are required to meet the SI/TA rules as listed below.

Wells SI/TA beyond twelve (12) consecutive months requires filing a Sundry Notice (R649-3-36-1). Wells with five (5) years non-activity or non-productivity shall be plugged, unless the Division grants approval for extended shut-in time upon a showing of good cause by the operator (649-3-36-1.3.3). For extended SI/TA consideration the operator shall provide the Utah Division of Oil, Gas & Mining with the following:


1. Reasons for SI/TA of the well (R649-3-36-1.1)
2. The length of time the well is expected to be SI/TA (R649-3-36-1.2), and
3. An explanation and supporting data if necessary, for showing the well has integrity, meaning that the casing, cement, equipment condition, static fluid level, pressure, existence or absence of Underground Sources of Drinking Water and other factors do not make the well a risk to public health and safety or the environment (R649-3-36-1.3).

Please note that the Divisions preferred method for showing well integrity is by MIT

Submitting the information suggested below may help show well integrity and may help qualify your well for extended SI/TA. **Note: As of July 1, 2003, wells in violation of the SI/TA rule R649-3-36 may be subject to full cost bonding (R649-3-1-4.2, 4.3).**

1. Wellbore diagram, and
2. Copy of recent casing pressure test, and
3. Current pressures on the wellbore (tubing pressure, casing pressure, and casing/casing annuli pressure) showing wellbore has integrity, and
4. Fluid level in the wellbore, and
5. An explanation of how the submitted information proves integrity.

If the required information is not received within 30 days of the date of this notice, further actions may be initiated. If you have any questions concerning this matter, please contact me at (801) 538-5281.

Sincerely,

Dustin K. Doucet
Petroleum Engineer

DKD/JP/js

cc: Compliance File
Well File

LaVonne Garrison, SITLA

N:\O&G Reviewed Docs\ChronFile\PetroleumEngineer\SITA

ATTACHMENT A

	Well Name	API	LEASE	Years Inactive	Prior Notice	Proposed PA
1	AGENCY DRAW 12-21-31-36	43-047-36424	ML 47086	7 years 10 months	1 ST NOTICE	12/31/2014
2	ASPHALT WASH 11-24-42-16	43-047-36875	ML 47080	7 years 11 months	1 ST NOTICE	12/31/2014
3	ARCHY BENCH 11-24-24-32	43-047-36819	ML 49762	7 years 1 month	1 ST NOTICE	12/31/2012
4	SOUTHAM CYN 10-25-11-6	43-047-36933	FEE	7 years	1 ST NOTICE	12/31/2012
5	N HORSESHOE 3-13-6-21	43-047-37391	ML 49317	5 years 6 months	2 ND NOTICE	Extension valid to 9/1/2014
6	BUCK CAMP 12-22-21-2	43-047-37656	ML 47087	6 years 8 months	1 ST NOTICE	12/31/2014
7	DWR 12-23-13-21	43-047-33344	FEE	6 years		12/31/2014
8	DWR 12-23-31-21	43-047-33484	FEE	5 years 4 months	1 ST NOTICE	12/31/2013
9	ARCHY BENCH 12-23-42-16	43-047-36802	ML 48957	6 years 1 month		12/31/2014
10	ARCHY BENCH 11-24-12-32	43-047-36822	ML 49762	5 years 5 months		12/31/2013
11	ROCK HOUSE 10-22-33-36	43-047-37789	ML 49959	5 years 5 months		12/31/2014
12	HANGING ROCK 11-23-24-36	43-047-38278	ML 50085	5 years 3 months		5/18/2012
13	N WALKER HOLLOW 2-32-6-23	43-047-37399	ML 47777	4 years 7 months	1 ST NOTICE	
14	BUCK CAMP 12-22-31-2	43-047-36273	ML-47087	3 years 6 months		
15	SOUTHAM CYN 9-24-13-36	43-047-38910	FEE	3 years 9 months		
16	DWR 12-23-12-28	43-047-33343	FEE	2 years 6 months		
17	BONANZA 9-24-11-16	43-047-35622	ML-46526	2 years 6 months		
18	ROCK HOUSE 10-22-32-36	43-047-36409	ML-47061	2 years 5 months		
19	BUCK CYN 12-21-43-16	43-047-37091	ML-47085	2 years 6 months		
20	BUCK CAMP 11-22-11-36	43-047-36277	ML-47077	2 years 1 month		
21	HANGING ROCK 11-23-42-36	43-047-38280	ML-50085	2 years 2 months		
22	HANGING ROCK 11-23-43-36	43-047-38282	ML-50085	1 years 5 months		
23	ROCK HOUSE 10-22-21-36	43-047-36407	ML-47061	2 years 2 months		
24	ROCK HOUSE 10-23-21-30	43-047-37832	FEE	2 years 3 months		
25	SOUTHMAN CYN 9-23-21-36	43-047-36530	ML-47782	2 years		
26	SOUTHMAN CYN 9-23-33-36	43-047-35363	ML-47782	1 year 9 months		

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9 5.LEASE DESIGNATION AND SERIAL NUMBER: ML-49762
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7.UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well		8. WELL NAME and NUMBER: ARCHY BENCH 11-24-24-32
2. NAME OF OPERATOR: Enduring Resources, LLC		9. API NUMBER: 43047368190000
3. ADDRESS OF OPERATOR: 511-16th Street, Suite 700 , Denver, CO, 80202		9. FIELD and POOL or WILDCAT: OIL SPRINGS
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0660 FSL 1780 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 32 Township: 11.0S Range: 24.0E Meridian: S		COUNTY: Uintah STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 7/1/2015	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input checked="" type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width:100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Plugging proposal attached for approval.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: May 18, 2015

By: *Derek Duff*

Please Review Attached Conditions of Approval

NAME (PLEASE PRINT) Travis Whitam	PHONE NUMBER 303 350-5716	TITLE Landman
SIGNATURE N/A	DATE 4/22/2015	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Sundry Conditions of Approval Well Number 43047368190000

- 1. Notify the Division at least 24 hours prior to conducting abandonment operations. Please call Dan Jarvis at 801-538-5338.**
- 2. Note Plug #3: Reports state cement on production string was circulated to surface. The reported amount of cement pumped would support that as well. It is unlikely that casing can be cut and pulled from 2037'. If CBL shows cement is above 2037', then a 200' cement plug (± 15 sx) shall be balanced from 2087' to 1887'. If TOC is below 2037', then proceed as proposed in the procedure.**
- 3. Note Plug #4: Reports state cement on production string was circulated to surface. The reported amount of cement pumped would support that as well. It is unlikely that casing can be cut and pulled from 2037'. If casing is not pulled, a cement plug shall be placed inside the 4 1/2" casing and all annuli shall be cemented from a minimum depth of 100' back to surface.**
- 4. All balanced plugs shall be tagged to ensure that they are at the depth specified.**
- 5. Surface reclamation shall be done in accordance with R649-3-34 – Well Site Restoration.**
- 6. All requirements in the Oil and Gas Conservation General Rule R649-3-24 shall apply.**
- 7. If there are any changes to the procedure or the wellbore configuration, notify Dustin Doucet at 801-538-5281 (ofc) or 801-733-0983 (home) prior to continuing with the procedure.**
- 8. All other requirements for notice and reporting in the Oil and Gas Conservation General Rules shall apply.**

Wellbore Diagram

API Well No: 43-047-36819-00-00 Permit No: Well Name/No: ARCHY BENCH 11-24-24-32
 Company Name: ENDURING RESOURCES, LLC
 Location: Sec: 32 T: 11S R: 24E Spot: SESW
 Coordinates: X: 649128 Y: 4408455
 Field Name: OIL SPRINGS
 County Name: UINTAH

String Information

String	Bottom (ft sub)	Diameter (inches)	Weight (lb/ft)	Length (ft)	Capacity (cf/ft)
HOL1	40	20			
COND	40	14			
HOL2	1987	12.25			
SURF	1987	8.625	32	1987	2.922
HOL3	6084	7.875			
CIBP	4120	4.5			
PROD	6079	4.5	11.6	6079	11.459
TI	5655	2.375			

$100' / (1.15) (2.922) = 305x$
 $305x \text{ proposed } 7\frac{7}{8}'' \times 4\frac{1}{2}'' (108)$
 $100' / (1.15) (2.443) = 305x$
 $305x \text{ proposed } 7\frac{7}{8}'' \text{ O.H. } (108)$

Cement Information

String	BOC (ft sub)	TOC (ft sub)	Class	Sacks
COND	40	0		
PROD	6079	0	G	280 1235
SURF	1987	0	G	256 717


$280 \uparrow 8915$
 $256 \uparrow 717$

Perforation Information

String	Top (ft sub)	Bottom (ft sub)	Shts/Ft	No Shts	Dt Squeeze
PROD	3223	3877			
PROD	4204	5816			

Formation Information

Formation	Depth
UTEBT	2392
BMSW	3100
WSTC	3465
MVRD	3971

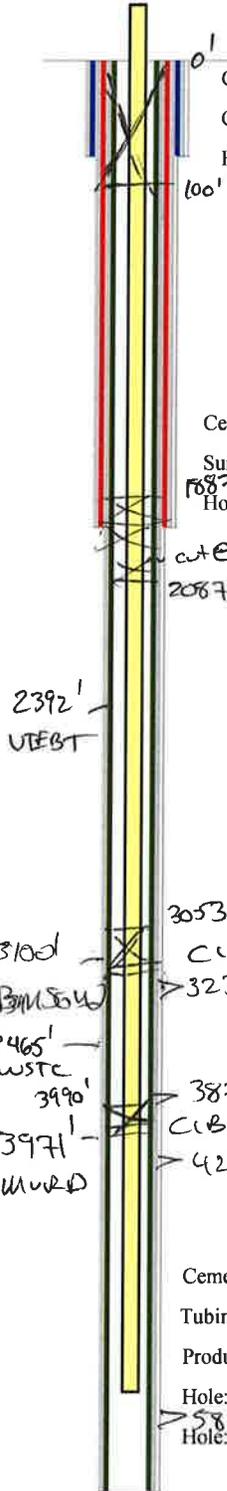

Cement from 40 ft. to surface
 Conductor: 14 in. @ 40 ft.
 Hole: 20 in. @ 40 ft.

Cement from 1987 ft. to surface
 Surface: 8.625 in. @ 1987 ft.
 Hole: 12.25 in. @ 1987 ft.

cut @ 2037'
 2087'

2392'
 UTEBT

3100'
 BMSW

3465'
 WSTC

3990'
 3971'
 MVRD

3053'
 CIBP @ 3183'
 3233'

3877'
 CIBP @ 4120'
 4204'

Cement from 6079 ft. to surface
 Tubing: 2.375 in. @ 5655 ft.
 Production: 4.5 in. @ 6079 ft.
 Hole: Unknown
 5816'
 Hole: 7.875 in. @ 6084 ft.

Plug # 4

Plug # 3

Plug # 2

Plug # 1

* Cmt reworked cin to surf.
 IF CBL shows cmt top below 2037'
 Proceed As Planned:
 stub 50' / (1.15) (11.459) = 45x
 5H 50' / (1.15) (2.443) = 185x
 8 7/8" 100' / (1.15) (2.922) = 305x
 IF TOC above 2037' → set for 2087' to 1867'
 200' / (1.15) (4.459) = 155x

105x = 130'
 TOC @ 3053'

(105x) (1.15) (11.459) = 131'
 TOC @ 3990'

TD: 6084 TVD: 6084 PBD: 6067

RECOMMENDED PROCEDURE

PLUG AND ABANDONMENT

Operator: Enduring Resources

Well Name: Archy Bench 11-24-24-32

Legals: SESW 32, T11S, R24E

Location: Uintah County, Utah

API: 43-047-36819

Surface: 8 5/8 32# J-55 Hole size: 12 1/4 TOC: surface

Production: 4 1/2 11.6,N-80 Hole size: 7 7/8 TOC:

Tubing: 2 3/8 4.7#, J-55 EOT: NA' 117 joints

Rods: 3 -7/8" pony, 97 3/4" rods, 1- 1/2" sinker bars, 1- 1/2 " pump

Perforations: Notches @ 3233', 3877'

PBTD: 4120'

TD: 6084'

1. Conduct pre-job safety meeting and complete daily JSA
2. Prior to MIRU, check rig anchors and blow down well if necessary
3. Dig out around wellhead and check surface annulus for pressure, if present call for orders.
4. MIRU P&A equipment
5. TOH rods
6. ND wellhead NU BOP
7. TIH and tag CIBP @ 4120'
8. Pump 10 sacks cement on top of CIBP (10 sacks is 130' inside 4 1/2)
9. TOH and tally tubing
10. PU 4 1/2 casing scraper and TIH to 3240' TOH, LD scraper
11. PU 4 1/2 CIBP , TIH and set @ 3183' (50' above top perfs)
12. Pump 10 sacks cement on top of CIBP (10 sacks is 130' inside 4 1/2)
13. TOH 10 joints
14. Roll hole with 45 bbls water with corrosion inhibitor
15. Pressure test casing to 500psi for 15 min. If pressure doesn't hold, call for orders.
TOH, stand back 2087'
16. RU wireline, cut casing @ 2037' RD wireline
17. TOH and LD 4 1/2" casing
18. TIH tubing to 2087'(50' inside casing stub)
19. Pump 50 sacks cement from 2087' to 1887'(100' inside surface casing)
20. TOH, WOC
21. TIH and tag, must be 1887' TOH
22. ND BOP
23. TIH to 100' Circulate 30 sacks cement to surface, TOH
24. RDMO

25. Dig up wellhead and cut off Top off if necessary
26. Weld on information plate and backfill, clean up location

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: ML-49762
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: ARCHY BENCH 11-24-24-32	
2. NAME OF OPERATOR: Enduring Resources, LLC	9. API NUMBER: 43047368190000	
3. ADDRESS OF OPERATOR: 511-16th Street, Suite 700 , Denver, CO, 80202	PHONE NUMBER: 303 350-5114 Ext	9. FIELD and POOL or WILDCAT: OIL SPRINGS
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0660 FSL 1780 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 32 Township: 11.0S Range: 24.0E Meridian: S		COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 7/5/2016	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input checked="" type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
 P&A procedure attached.

**Approved by the
 Utah Division of
 Oil, Gas and Mining**

Date: June 28, 2016
By: *David K. Quist*

Please Review Attached Conditions of Approval

NAME (PLEASE PRINT) Travis Whitham	PHONE NUMBER 303 350-5716	TITLE Landman
SIGNATURE N/A	DATE 6/8/2016	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Sundry Conditions of Approval Well Number 43047368190000

- 1. Notify the Division at least 24 hours prior to conducting abandonment operations. Please call Dan Jarvis at 801-538-5338.**
- 2. All balanced plugs shall be tagged to ensure that they are at the depth specified.**
- 3. All annuli shall be cemented from a minimum depth of 100' to the surface.**
- 4. Surface reclamation shall be done in accordance with R649-3-34 – Well Site Restoration.**
- 5. All requirements in the Oil and Gas Conservation General Rule R649-3-24 shall apply.**
- 6. If there are any changes to the procedure or the wellbore configuration, notify Dustin Doucet at 801-538-5281 (ofc) or 801-733-0983 (home) prior to continuing with the procedure.**
- 7. All other requirements for notice and reporting in the Oil and Gas Conservation General Rules shall apply.**

NOTE: THIS APPROVAL AMENDS APPROVAL DATED MAY 18, 2015.

6/28/2016

Wellbore Diagram


r263

API Well No: 43-047-36819-00-00 **Permit No:**
Company Name: ENDURING RESOURCES, LLC
Location: Sec: 32 T: 11S R: 24E Spot: SESW
Coordinates: X: 649128 Y: 4408455
Field Name: OIL SPRINGS
County Name: Uintah

Well Name/No: ARCHY BENCH 11-24-24-32

String Information

String	Bottom (ft sub)	Diameter (inches)	Weight (lb/ft)	Length (ft)	Capacity (cf/ct)
HOL1	40	20			
COND	40	14			
HOL2	1987	12.25			
SURF	1987	8.625	32	1987	
HOL3	6084	7.875			
CIBP	4120	4.5			
PROD	6079	4.5	11.6	6079	11.459
T1	5655	2.375			

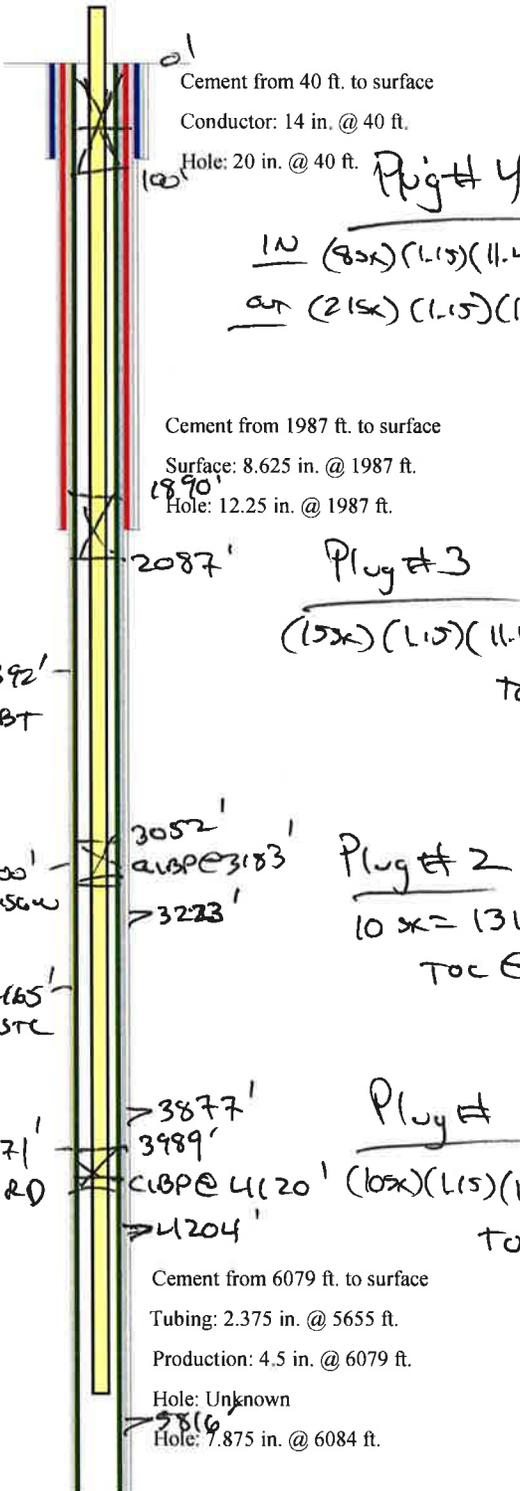

Cement Information

String	BOC (ft sub)	TOC (ft sub)	Class	Sacks
COND	40	0		
PROD	6079	0	G	280
SURF	1987	0	G	256

Perforation Information

Top (ft sub)	Bottom (ft sub)	Shts/Ft	No Shts	Dt Squeeze
3223	3877			
4204	5816			

Formation Information

Formation	Depth
UTEBT	2392
BMSW	3100
WSTC	3465
MVRD	3971

TD: 6084 TVD: 6084 PBTD: 6067



Recommended Procedure

Plug and Abandonment

Operator:	Enduring Resources, LLC		
Well name:	Archy Bench #11-24-24-32		
Legal:	SESW, Section 32, Township 11 South, Range 24 East		
Location:	Uintah County, Utah		
GPS:	39.81301, -109.25774		
API:	43-047-36819		
Surface:	8-5/8" 32# at 1,987'	Hole size: 12-1/4"	TOC: Surface
Production:	4-1/2" 11.6# at 6,063'	Hole size: 7-7/8"	TOC: 1,800' (CBL)
Tubing:	2-3/8" 4.7# at 3,843' (TAC: 3,772')		
Rods:	102		
Perforations:	3,233' & 3,877' (Wasatch); 4,204', 5,637', 5,720', & 5,815' (Mesaverde, Isolated by CIBP)		
PBTD:	4,120' (Existing CIBP)		
TD:	6,084'		

Procedure based off of completion reports and well history, this is NOT a final procedure

1. Conduct pre-job safety meeting and complete daily JSA
2. Prior to MIRU, check rig anchors and blow down well/kill if necessary
3. Dig out around wellhead and check surface annulus for pressure
(If present call Tommy Joyce #817-933-9759 and Craig Owen #970-646-3933 for orders)
4. MIRU P&A equipment, NDWH, NUBOP, Load and circulate wellbore clean
5. TOH and tally 3,843' of tubing to derrick, PU 277' of 2-3/8" 4.7# workstring
6. TIH to 4,120' and tag existing CIBP (84' above topmost Mesaverde perms)
7. Pump 10 sxs of 15.8# class G neat 1.15 cu.ft./sack yield cement on top of CIBP
(10 sxs is 131' in 4-1/2", TOC: 3,989')
8. TOH and LD to 3,800', Reverse circulate tubing clean
9. Pump 11 bbl. of water treated with corrosion inhibitor
10. TOH, Stand back 3,183', PU 4-1/2" 11.6# casing scraper/bumper sub, TIH to 3,183', TOH, LD BHA
11. PU 4-1/2" 11.6#, 10K, CIBP, TIH and set at 3,183' (50' above topmost Wasatch perms)
12. Pump 10 sxs of 15.8# class G neat 1.15 cu.ft./sack yield cement on top of CIBP
(10 sxs is 131' in 4-1/2", TOC: 3,052')
13. TOH and LD to 2,900', Reverse circulate tubing clean, Pressure test casing to 500 psi for 5 minutes
(If test fails call Tommy Joyce and Craig Owen for orders)

Note: If casing pressure test fails (step 13) additional steps/services required by the Utah DOGM/BLM are not included in this bid and will be billed per our 2016 Time and Material Price Schedule.

14. Circulate 45 bbl. of water treated with corrosion inhibitor
15. TOH and LD to 2,087' (100' below surface casing shoe)
16. Pump 15 sxs of 15.8# class G neat 1.15 cu.ft./sack yield cement to cover surface casing shoe
(15 sxs is 197' in 4-1/2", TOC: 1,890')
17. TOH to 1,700', Reverse circulate tubing clean, WOC 4 hours, TIH and tag TOC at 1,937' or higher
18. TOH and LD to 100', Establish circulation to surface
19. Circulate 8 sxs of 15.8# class G neat 1.15 cu.ft./sack yield cement to surface
20. TOH and LD tubing, Dig out and cut off wellhead 6' below restored ground level
21. TIH 100' in 4-1/2" x 8-5/8" with 1" tubing, Establish circulation to surface
22. Circulate 21 sxs of 15.8# class G neat 1.15 cu.ft./sack yield cement to surface
23. TOH and LD tubing, RDMO, Top off if necessary
24. Weld on info plate, backfill, clean location, P&A complete

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS	5. LEASE DESIGNATION AND SERIAL NUMBER: ML-49762
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
1. TYPE OF WELL Gas Well	7. UNIT or CA AGREEMENT NAME:
2. NAME OF OPERATOR: Enduring Resources, LLC	8. WELL NAME and NUMBER: ARCHY BENCH 11-24-24-32
3. ADDRESS OF OPERATOR: 511-16th Street, Suite 700 , Denver, CO, 80202	9. API NUMBER: 43047368190000
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0660 FSL 1780 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 32 Township: 11.0S Range: 24.0E Meridian: S	9. FIELD and POOL or WILDCAT: OIL SPRINGS
	COUNTY: Uintah
	STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 7/19/2016	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input checked="" type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Plugging report attached. Well is waiting on reclamation and re-seeding planned for this fall.

**Accepted by the
 Utah Division of
 Oil, Gas and Mining
 FOR RECORD ONLY
 July 20, 2016**

NAME (PLEASE PRINT) Travis Whitham	PHONE NUMBER 303 350-5716	TITLE Landman
SIGNATURE N/A	DATE 7/20/2016	

Enduring Resources

Chronological Plugging Report

Archy Bench 11-24-24-32

7/12/16

MIRU Magna #34. Tailgate safety meeting. Bleed off tbg and csg to tank. Unseat pump. LD 1 7/8" rod and two ponies. Hang ogg rods. Circulate wellbore clean with Hot Oiler. POOH LD polish rod, 156 7/8 rods, two weight bars and pump. Well spitting whole time up csg and tbg. Wait on 9# brine. Circ wellbore with 65 bbls 9# brine to kill. RU floor and tbg handling equip. Cut off tie down bolts with torch. Install BOPE. Unseat hanger and attempt to release anchor/catcher. Secure well for night. Wait on small slips so we can get hanger off in AM to work tbg to release anchor.

7/13/16

Tailgate safety meeting. ND BOPE. Remove hanger. Strip on BOP. Work and release anchor. Pulled 3 stds and anchor hung up in csg collar. Work free but will only go down hole. Push anchor down hole to CIBP @4120'. Tried to call DOGM for permission to shoot off and leave in hole but got no calls back. Wait on wireline. Cut off tbg in first jt above anchor with jet cutter. POOH LD 1 jt tbg. Pump 20 sack cement plug on top of anchor as follows. 1 bbl fresh, 20 sacks cement, 1 bbl fresh and displace w/12.5 bbls water. Cement from 4010' to 3750'. LD 10 jts tbg. TOOH w/tbg and cut jt. SWIFN.

7/14/16

Hold tailgate safety meeting. TIH w/bit and scraper to 3195'. TOOH LD bit and scraper. PU 4.5" CIBP and TIH on 98 jts tbg and set @3185'. Roll hole w/water treated w/corrosion inhibitor. Pressure test csg to 500 psi for 5 min, good. Spot 10 sks cement on top of CIBP as follows: 1 bbl fresh, 10 sacks cement, 1 bbl fresh and displace w/10 bbls treated water. Cement top @3055'. LD 34 jts tbg, EOT @2082'. Pump 15 sks balanced cement plug as follows: 1 bbl fresh, 15 sks cement, 1 bbl fresh and displace w/5.5 bbls treated water. LD 60 jts tbg. EOT @130'. Circulate cement to fill 4.5" csg from 130' to surface. LD 4 jts tbg. RD floor. ND BOPE. Rack out all equip. Will cut-off WH and top off csg strings Tuesday. Rig will move to the Rockhopper 11-24-23-29.

7/19/16

Tail gate safety meeeting. Dig out WH. Cut off 8 5/8 and 4 1/2 csg. Run 100' of 1" pipe down annulus. Top off both strings w/20 sks cement. RD cement equip and move to Rock Hopper. Weld on information plate and backfill hole. Final report until reclamation.