

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

5. Lease Serial No.
UTU-460

6. If Indian, Allottee or Tribe Name

7. If Unit or CA Agreement, Name and No.
NATURAL BUTTES UNIT

8. Lease Name and Well No.
NBU 920-35K

9. API Well No.
43-047-37024

1a. Type of Work: DRILL REENTER

b. Type of Well: Oil Well Gas Well Other Single Zone Multiple Zone

2. Name of Operator
WESTPORT OIL & GAS COMPANY, L.P.

3A. Address
1368 SOUTH 1200 EAST, VERNAL, UTAH 84078

3b. Phone No. (include area code)
(435) 781-7060

4. Location of Well (Report location clearly and in accordance with any State requirements.)*
At surface **NESW 2075' FSL 2066' FWL 616550X 39.989697**
At proposed prod. Zone **44272964 - 109.634861**

10. Field and Pool, or Exploratory
NATURAL BUTTES

11. Sec., T., R., M., or Blk, and Survey or Area
SEC 35-T9S-R20E

12. County or Parish
UINTAH

13. State
UT

14. Distance in miles and direction from nearest town or post office*
8.9 MILES SOUTHEAST OF OURAY, UTAH

15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) **2066'**

16. No. of Acres in lease **320**

17. Spacing Unit dedicated to this well **40**

18. Distance from proposed* location to nearest well, drilling, completed, applied for, on this lease, ft. **REFER TO TOPO C**

19. Proposed Depth **10000'**

20. BLM/BIA Bond No. on file **CO-1203**

21. Elevations (Show whether DF, KDB, RT, GL, etc.)
4881.9' GL


22. Approximate date work will start*
UPON APPROVAL

23. Estimated duration
TO BE DETERMINED


24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|--|
| <ul style="list-style-type: none"> 1. Well plat certified by a registered surveyor. 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office. | <ul style="list-style-type: none"> 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 5. Operator certification. 6. Such other site specific information and/or plans as may be required by the authorized office. |
|---|--|

25. Signature  Name (Printed/Typed) **DEBRA DOMENICI** Date **8/17/2005**

Title **ASSOCIATE ENVIRONMENTAL ANALYST**

Approved by (Signature)  Name (Printed/Typed) **BRADLEY G. HILL** Date **08-25-05**

Title **ENVIRONMENTAL SCIENTIST III**

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)


RECEIVED
AUG 19 2005
DIV. OF OIL, GAS & MINING

Federal Approval of this Action Is Necessary

T9S, R20E, S.L.B.&M.

WESTPORT OIL AND GAS COMPANY, L.P.

Well location, NBU #920-35K, located as shown in the NE 1/4 SW 1/4 of Section 35, T9S, R20E, S.L.B.&M. Uintah County, Utah.

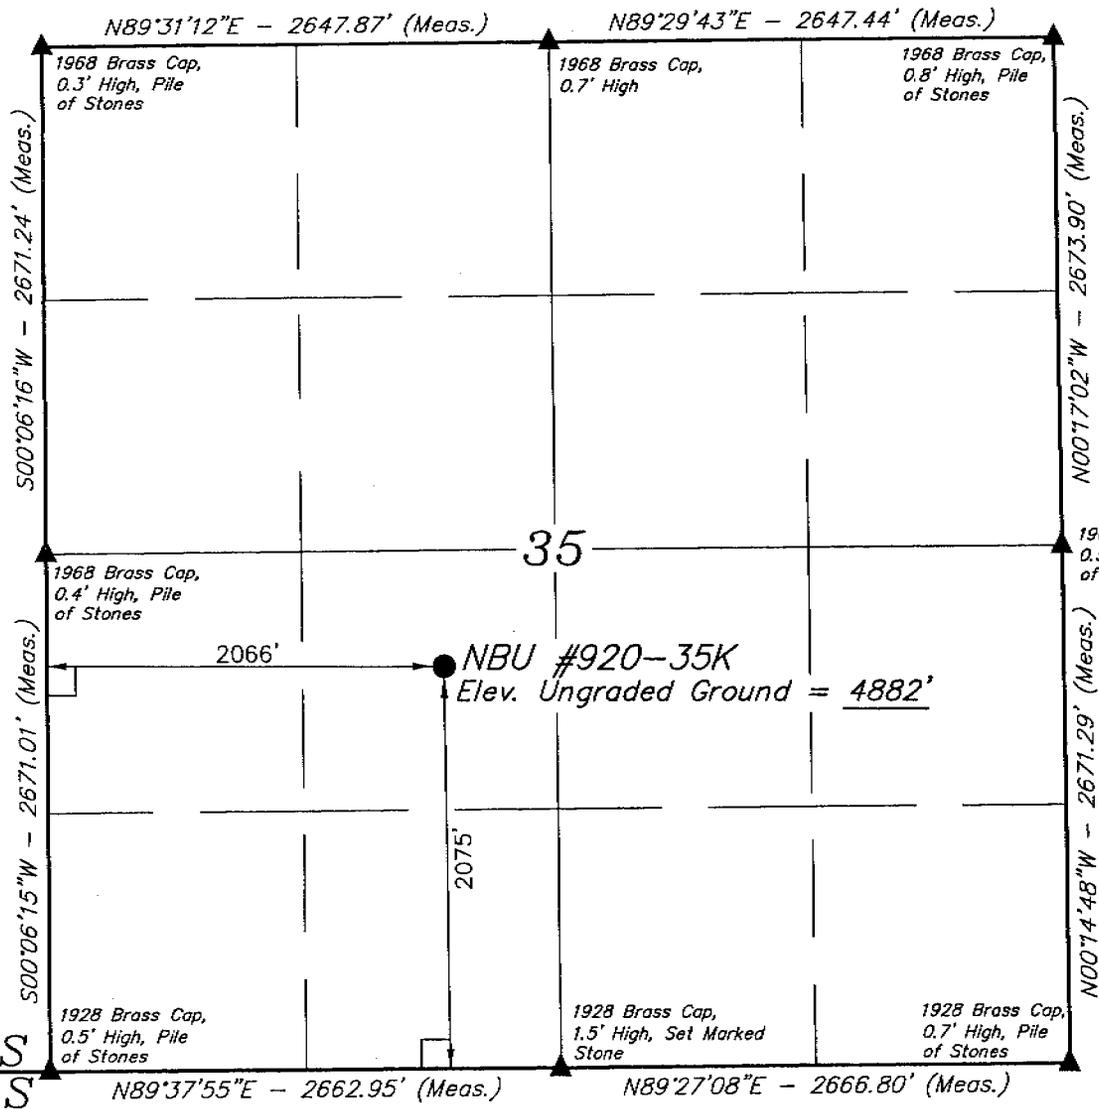


BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE QUADRANGLE, UTAH, UTAH COUNTY, 7.5 MINUTE QUAD (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

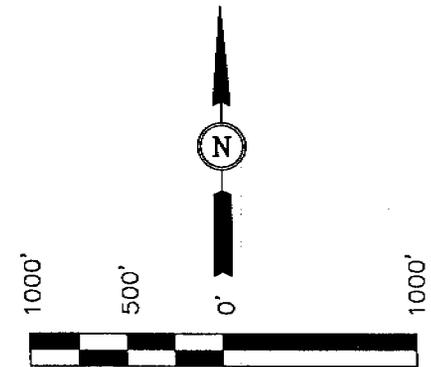

SCALE

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

[Signature]
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. AG 319
 STATE OF UTAH

UINTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

LEGEND:

- = 90° SYMBOL
- = PROPOSED WELL HEAD.
- = SECTION CORNERS LOCATED.

(NAD 83)
 LATITUDE = 39°59'22.85" (39.989681)
 LONGITUDE = 109°38'07.99" (109.635553)
 (NAD 27)
 LATITUDE = 39°59'22.98" (39.989717)
 LONGITUDE = 109°38'05.50" (109.634861)

SCALE 1" = 1000'	DATE SURVEYED: 06-06-05	DATE DRAWN: 06-15-05
PARTY D.K. L.K. L.K.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE WESTPORT OIL AND GAS COMPANY, L.P.	

NBU #920-35K
NESW Sec. 35, T9S, R20E
UINTAH COUNTY, UTAH
UTU-460

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. **Estimated Tops of Important Geologic Markers:**

<u>Formation</u>	<u>Depth</u>
Uinta	0- Surface
Green River	1750'
Wasatch	5075'
Mesaverde	8110'
TD	10000'

2. **Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:**

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
	Green River	1750'
Gas	Wasatch	5075'
Gas	Mesaverde	8110'
Water	N/A	
Other Minerals	N/A	

3. **Pressure Control Equipment** (Schematic Attached)

Please see the Natural Buttes Unit Standard Operating Procedure (SOP).

4. **Proposed Casing & Cementing Program:**

Please see the Natural Buttes Unit SOP.

5. **Drilling Fluids Program:**

Please see the Natural Buttes Unit SOP.

6. **Evaluation Program:**

Please see the Natural Buttes Unit SOP.

7. **Abnormal Conditions:**

Maximum anticipated bottomhole pressure calculated at 10000' TD, approximately equals 4000 psi (calculated at 0.4 psi/foot).

Maximum anticipated surface pressure equals approximately 1800 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. **Anticipated Starting Dates:**

Drilling is planned to commence immediately upon approval of this application.

9. **Variiances:**

Please see Natural Buttes Unit SOP.

10. **Other Information:**

Please see Natural Buttes Unit SOP.



Westport Oil and Gas Company, L.P.
DRILLING PROGRAM

CASING PROGRAM

	SIZE	INTERVAL	WT	GR	CPLG	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'				2270	1370	254000
SURFACE	9-5/8"	0 to 2300	32.30	H-40	STC	0.52*****	1.27	3.33
	9-5/8"	2300 to 2700	36.00	J-55	STC	1.04*****	1.60	7.39
PRODUCTION	4-1/2"	0 to 10000	11.60	I-80	LTC	1.77	0.96	1.99

- 1) Max Anticipated Surf. Press.(MASP) (Surface Casing) = (Pore Pressure at next csg point-(0.22 psi/ft-partial evac gradient x TVD of next csg point)
- 2) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft-partial evac gradient x TD)
- (Burst Assumptions: TD = 12.7 ppg) .22 psi/ft = gradient for partially evac wellbore
- (Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)
- MASP 4404 psi
- ***** Burst SF is low but csg is stronger than formation at 2700 feet
- ***** EMW @ 2700 for 2270# is 16.2 ppg or 0.8 psi/ft

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE Option 1	LEAD	500	Premium cmt + 2% CaCl + .25 pps flocele	215	60%	15.60	1.18
	TOP OUT CMT (1)	250	20 gals sodium silicate + Premium cmt + 2% CaCl + .25 pps flocele	100		15.60	1.18
	TOP OUT CMT (2)	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
SURFACE Option 2	LEAD	2000	NOTE: If well will circulate water to surface, option 2 will be utilized Prem cmt + 16% Gel + 10 pps gilsonite +.25 pps Flocele + 3% salt BWO	230	35%	11.00	3.82
	TAIL	500	Premium cmt + 2% CaCl + .25 pps flocele	180	35%	15.60	1.18
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
PRODUCTION	LEAD	4,570'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	500	60%	11.00	3.38
	TAIL	5,430'	50/50 Poz/G + 10% salt + 2% gel +.1% R-3	1520	60%	14.30	1.31

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained
*Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

ADDITIONAL INFORMATION

Test casing head to 760 psi after installing. Test surface casing to 1,500 psi prior to drilling out.


BOPE: 11" 5M with one annular and 2 rams. Test to 5,000 psi (annular to 2,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.

Drop Totco surveys every 2000'. Maximum allowable hole angle is 5 degrees.

DRILLING ENGINEER: _____ DATE: _____
Brad Laney

DRILLING SUPERINTENDENT: _____ DATE: _____
Randy Bayne NBU920-35K_I80_APD(pipeline).xls

5M BOP STACK and CHOKE MANIFOLD SYSTEM

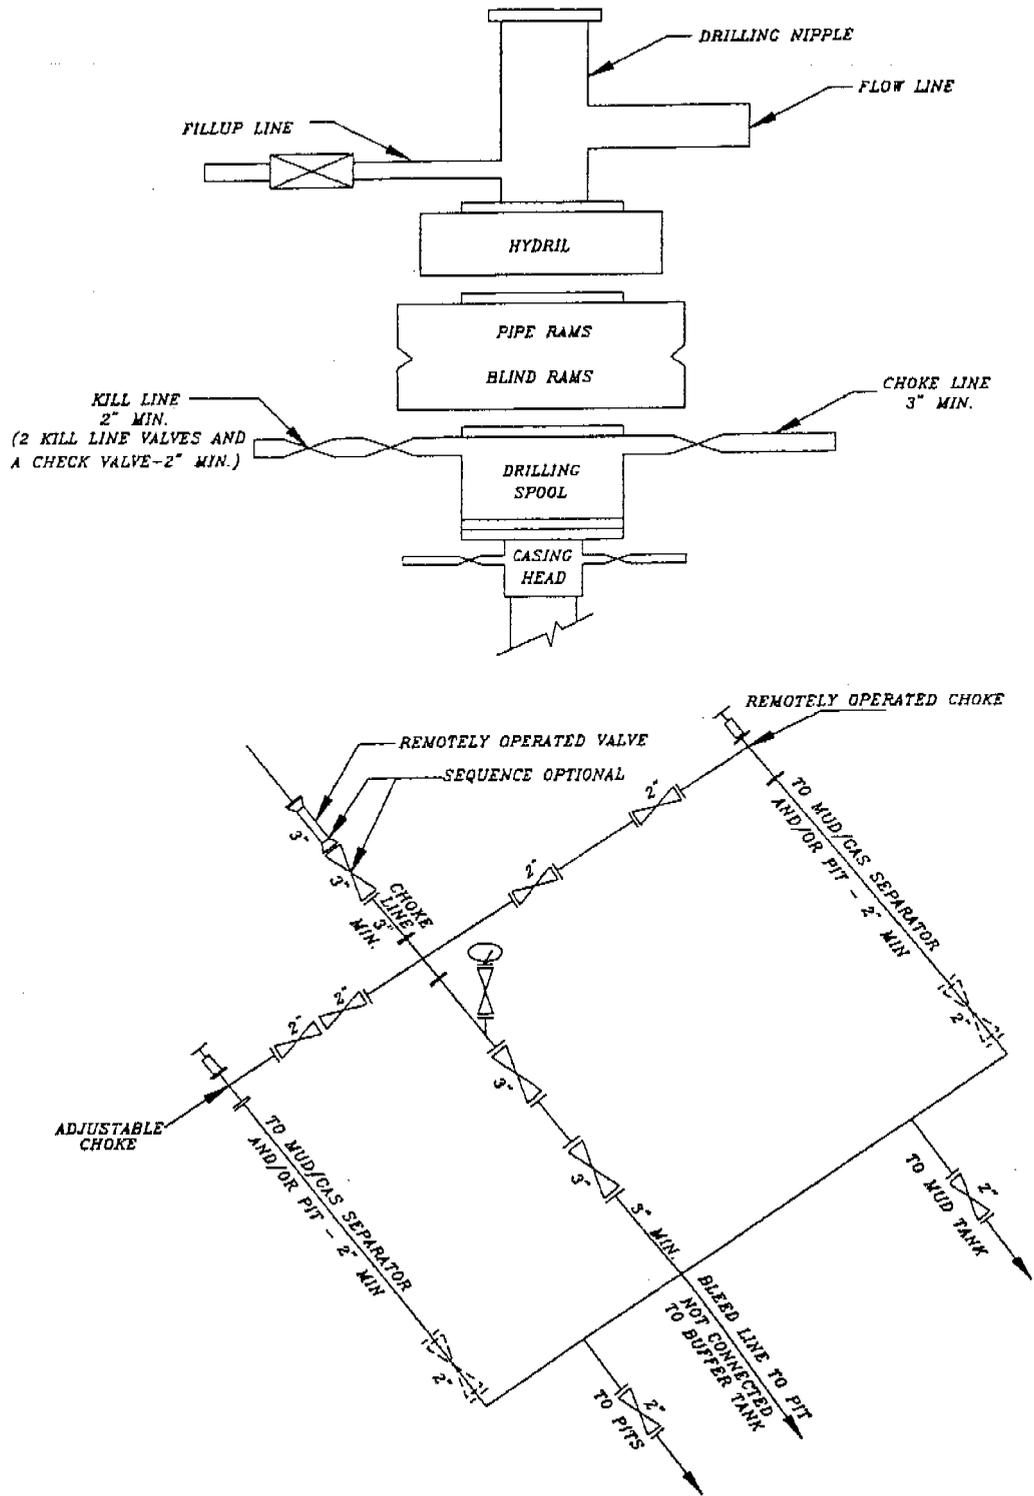

NBU #920-35K
NESW SEC 35-T9S-R20E
UINTAH COUNTY, UTAH
UTU-460

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

An onsite inspection was conducted for the NBU #920-35K on 8/9/05, for the subject well.

1. **Existing Roads:**

Refer to the attached location directions.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

2. **Planned Access Roads:**

Please see the Natural Buttes Unit Standard Operating Procedure (SOP).

Approximately 70' of existing 2-track needs upgraded and approximately 0.1 miles of new access road is proposed. Refer to Topo Map B.

3. **Location of Existing Wells Within a 1-Mile Radius**

Please refer to Topo Map C.

4. **Location of Existing & Proposed Facilities**

Please see the Natural Buttes Unit SOP.

Refer to Topo Maps D and D1 for the location of the proposed pipelines.

Variances to Best Management Practices (BMPs) Requested:

Approximately 614' of 4" steel pipeline will be installed on surface within the access corridor for the well location. As a Best Management Practice (BMP), the pipeline would be buried within the access road corridor if possible. The construction of pipelines requires the corridor of 30 feet.

This exception to the BMP should be granted by the BLM Authorized Officer because indurate bedrock, such as sandstone, is at or within 2 feet of the surface.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The requested color is Carlsbad Canyon Brown (2.5Y 6/2), a non-reflective earthtone.

5. **Location and Type of Water Supply:**

Please see the Natural Buttes SOP.

6. Source of Construction Materials

Please see the Natural Buttes SOP.

7. Methods of Handling Waste Materials

Please see the Natural Buttes SOP.

Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec. 35, T9S R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E (*Request is in lieu of filing Form 3160-5, after initial production*).

8. Ancillary Facilities

Please see the Natural Buttes SOP.

9. Well Site Layout: (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads. The hillside on the northwest side of the pit will be avoided.

As per previous onsite discussion, a 20 mil reserve pit liner with felt will be used.

Location size may change prior to the drilling of the well due to the current rig availability. If the proposed location is not large enough to accommodate the drilling rig. The location will be re-surveyed and a form 3160-5 will be submitted.

10. Plans for Reclamation of the Surface:

Please see the Natural Buttes SOP.

The following seed mixture will be used to reclaim the surface. A total of 12 lbs/acre will be used if the seeds are drilled (24 lbs/acre if the seeds are broadcast). The per acre requirements for *drilled* seed are:

Shadscale	3 lbs.
Gardiner Saltbush	3 lbs.
Galleta Grass	3 lbs.
Scarlet Globe Mallow	3 lbs.

The topsoil shall be spread on the location where practical and reseeded one time.

11. Surface Ownership:

The well pad and access road are located on lands owned by:

United States of America
Bureau of Land Management
170 South 500 East
Vernal, UT 84078
(435)781-4400

12. Stipulations:**Wildlife Stipulations:****Antelope Stipulations:**

No construction from May 15 through June 20. A variance may be granted upon request.

13. Other Information:

A Class III archaeological survey and a paleontological survey have been performed and will be filed when received.

This location is not within 460' from the boundary of the Natural Buttes Unit, nor is it within 460' of any non-committed tract lying within the boundaries of the Unit.

13. Lessee's or Operator's Representative & Certification:

Debra Domenici
Associate Environmental Analyst
Westport O&G Co.
1368 South 1200 East
Vernal, UT 84078
(435) 781-7060

Randy Bayne
Drilling Manager
Westport O&G Co.
1368 South 1200 East
Vernal, UT 84078
(435) 781-7018

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

Westport O&G Co. is considered to be the operator of the subject well. Westport O&G Co. agrees to be responsible under the terms and conditions of the lease for the operations conducted upon leased lands.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by BLM Nationwide Bond #CO-1203.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.


Debra Domenici

8/17/2005

Date

WESTPORT OIL AND GAS COMPANY, L.P.

NBU #920-35K

SECTION 35, T9S, R20E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; TURN LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 6.9 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 1.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING TWO-TRACK ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 70' TO THE BEGINNING OF THE PROPOSED ACCESS TO THE SOUTHWEST; FOLLOW ROAD FLAGS IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 0.1 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 39.9 MILES.

WESTPORT OIL AND GAS COMPANY, L.P.

NBU #920-35K
LOCATED IN UINTAH COUNTY, UTAH
SECTION 35, T9S, R20E, S.L.B.&M.

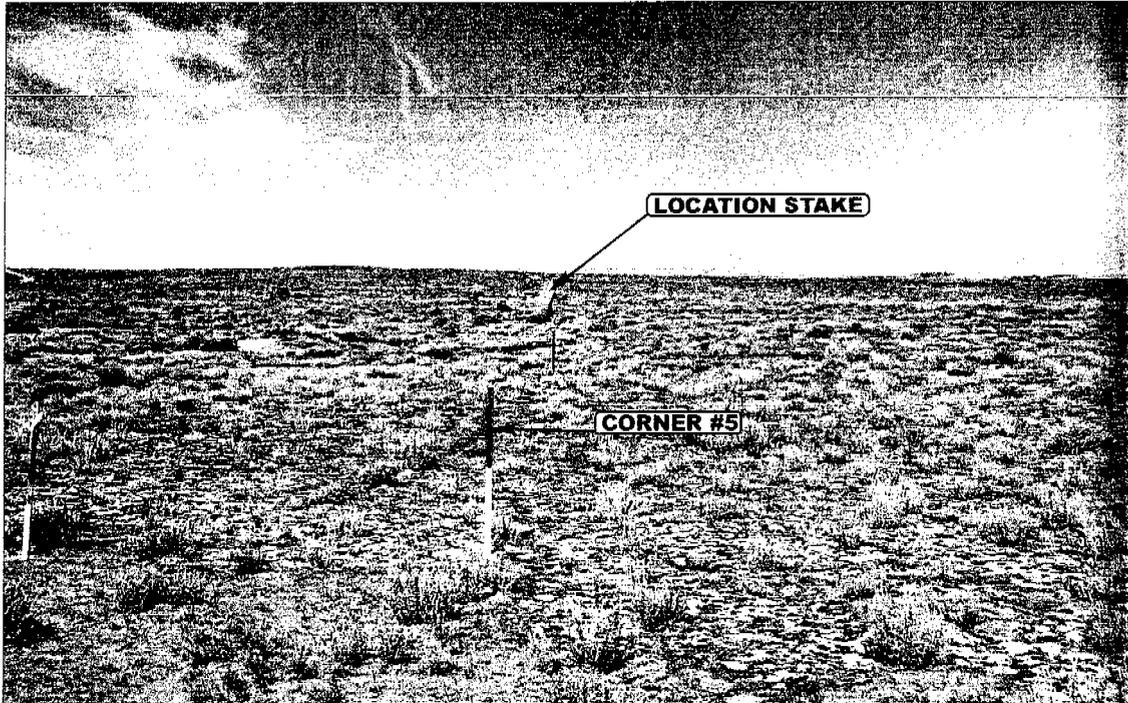


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: SOUTHWESTERLY

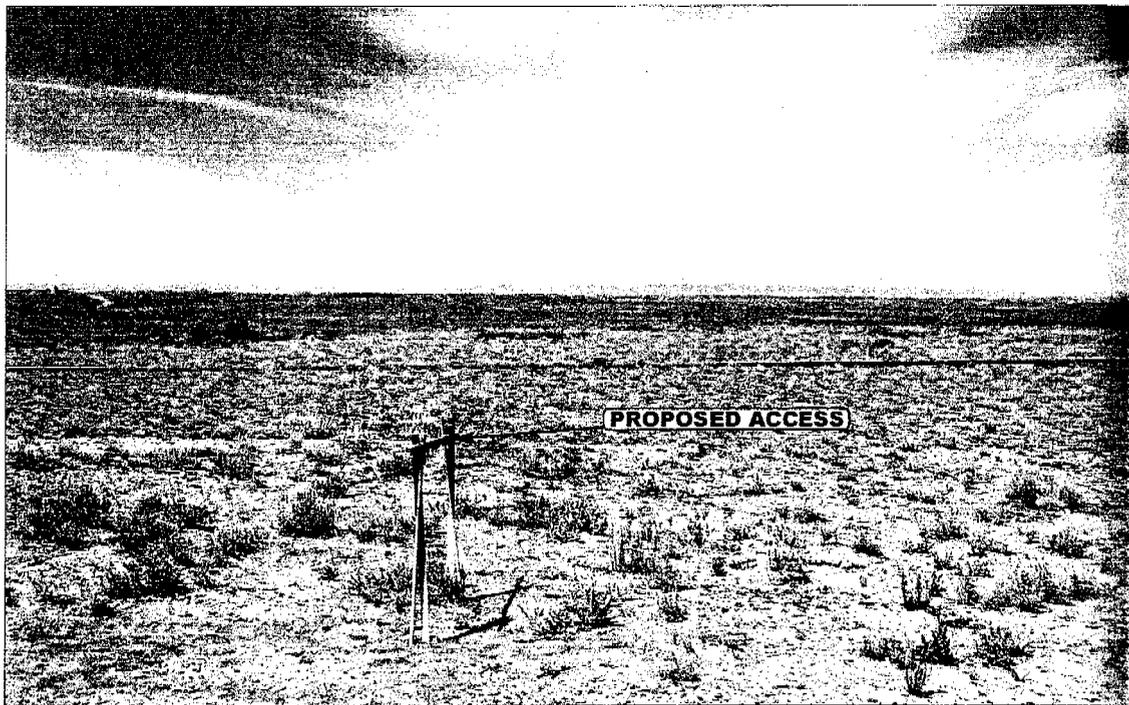


PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS


CAMERA ANGLE: SOUTHWESTERLY



- Since 1964 -

UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS	06	21	05	PHOTO
	MONTH	DAY	YEAR	
TAKEN BY: D.K.	DRAWN BY: C.P.	REVISED: 00-00-00		

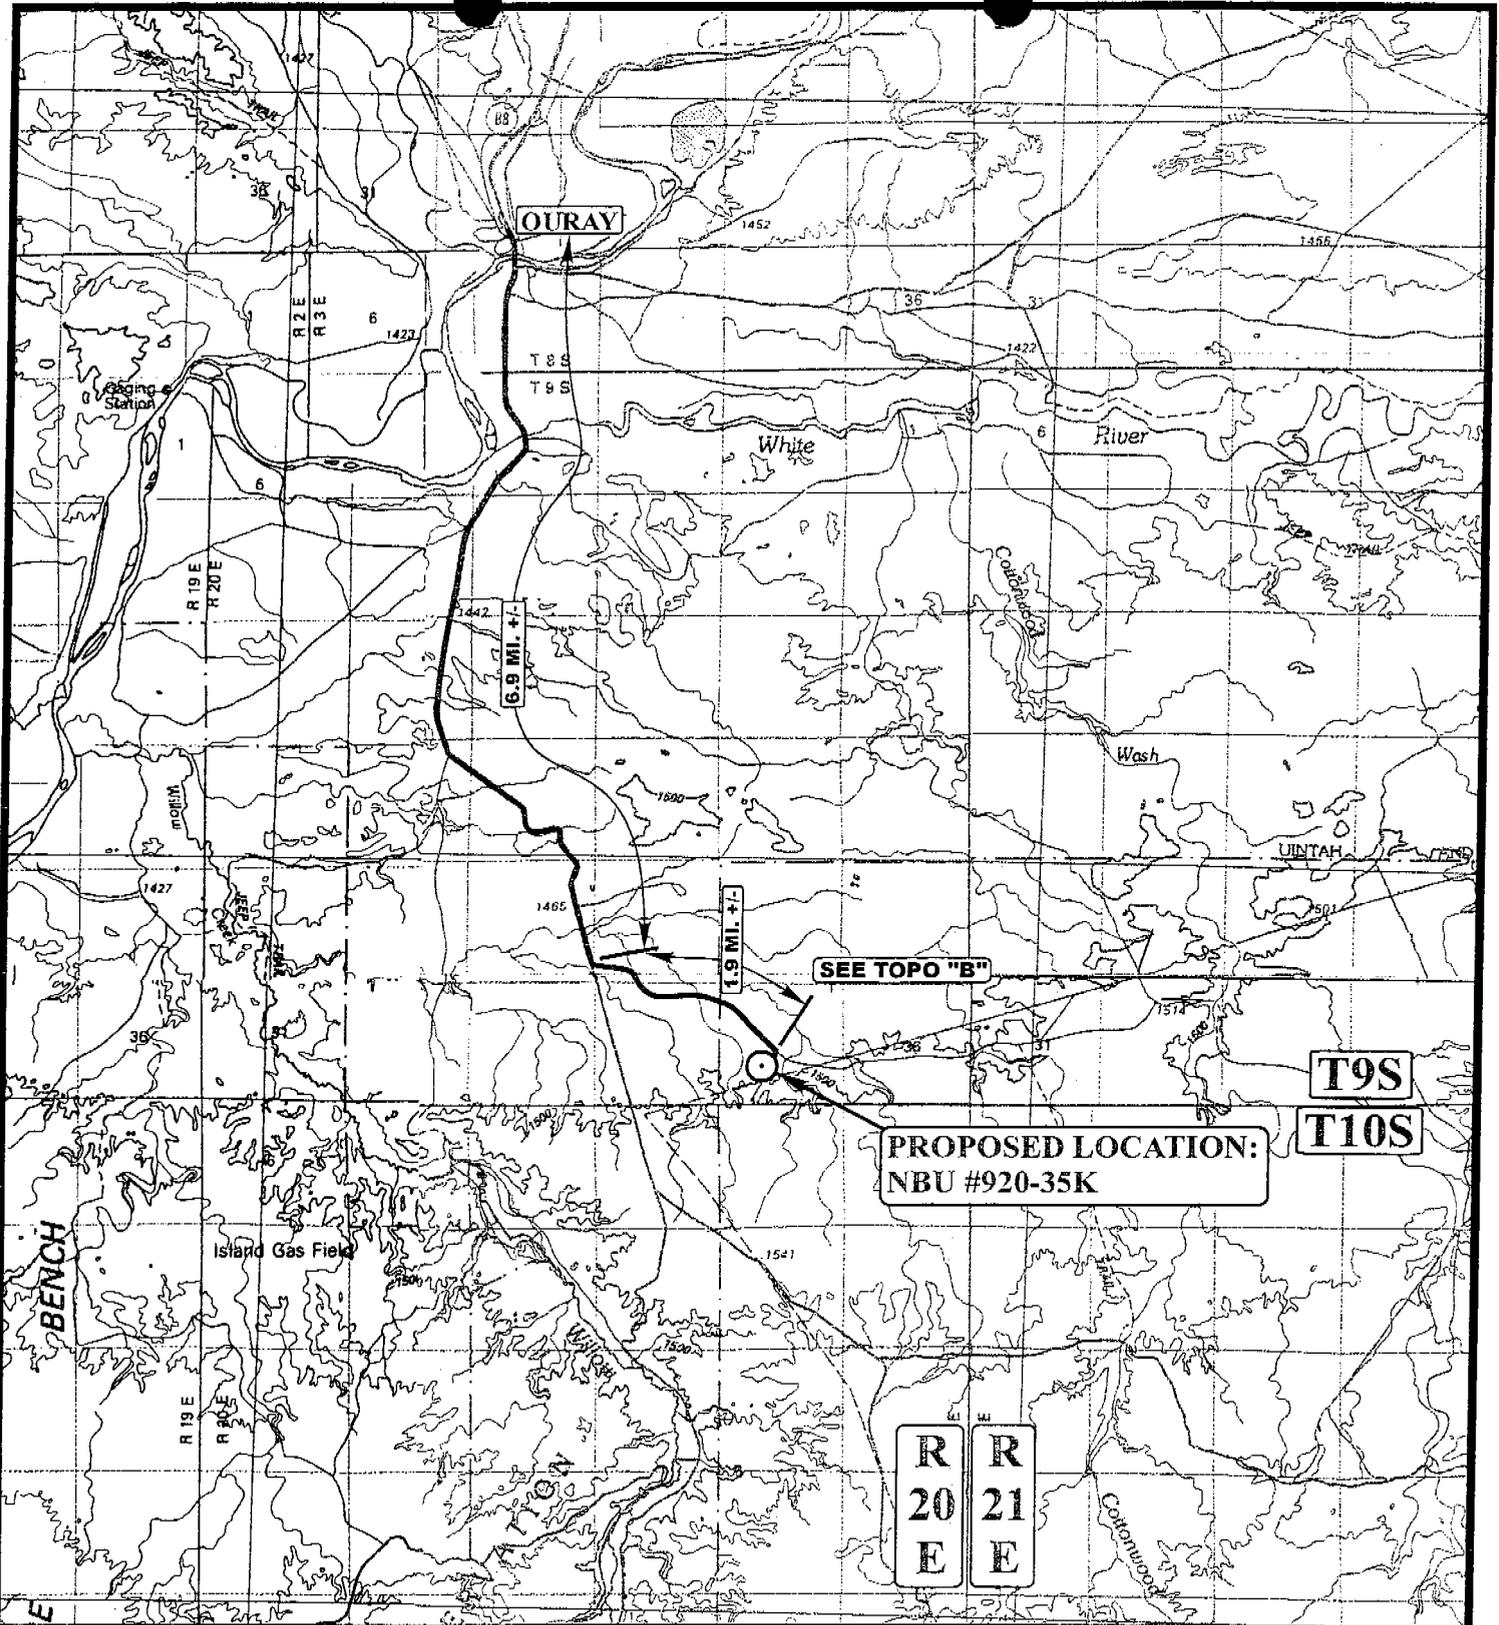

LEGEND:

⊙ PROPOSED LOCATION

WESTPORT OIL AND GAS COMPANY, L.P.

NBU #920-35K

SECTION 35, T9S, R20E, S.L.B.&M.

2075' FSL 2066' FWL




Uints Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC MAP 06 21 05
MONTH DAY YEAR
SCALE: 1:100,000 DRAWN BY: C.P. REVISED: 00-00-00



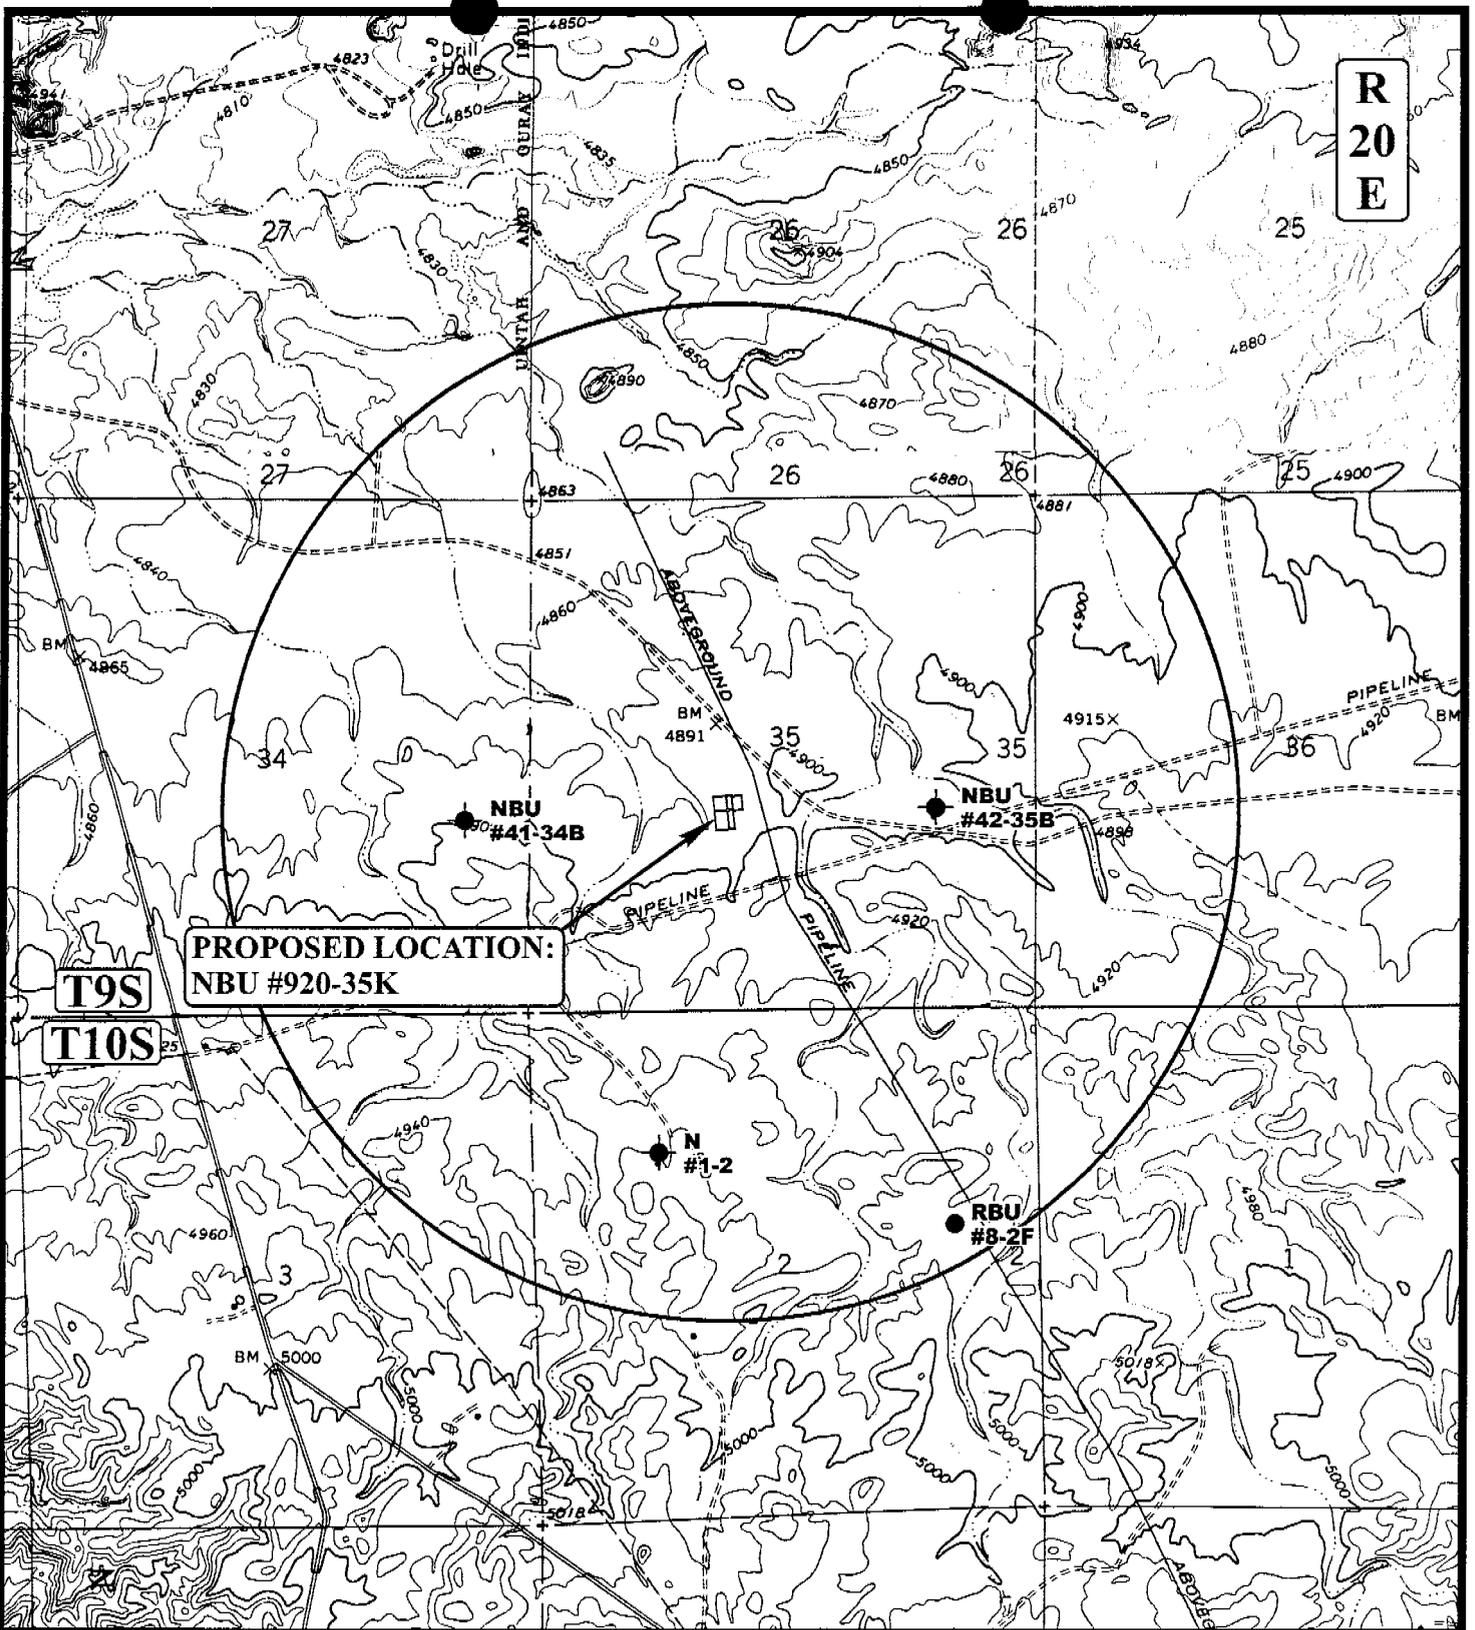

R
20
E

T9S

T10S

**PROPOSED LOCATION:
NBU #920-35K**

LEGEND:

- | | |
|-------------------|-------------------------|
| ⊗ DISPOSAL WELLS | ♂ WATER WELLS |
| ● PRODUCING WELLS | ● ABANDONED WELLS |
| ● SHUT IN WELLS | ● TEMPORARILY ABANDONED |



WESTPORT OIL AND GAS COMPANY, L.P.

**NBU #920-35K
SECTION 35, T9S, R20E, S.L.B.&M.
2075' FSL 2066' FWL**




Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**

06	21	05
MONTH	DAY	YEAR

SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00



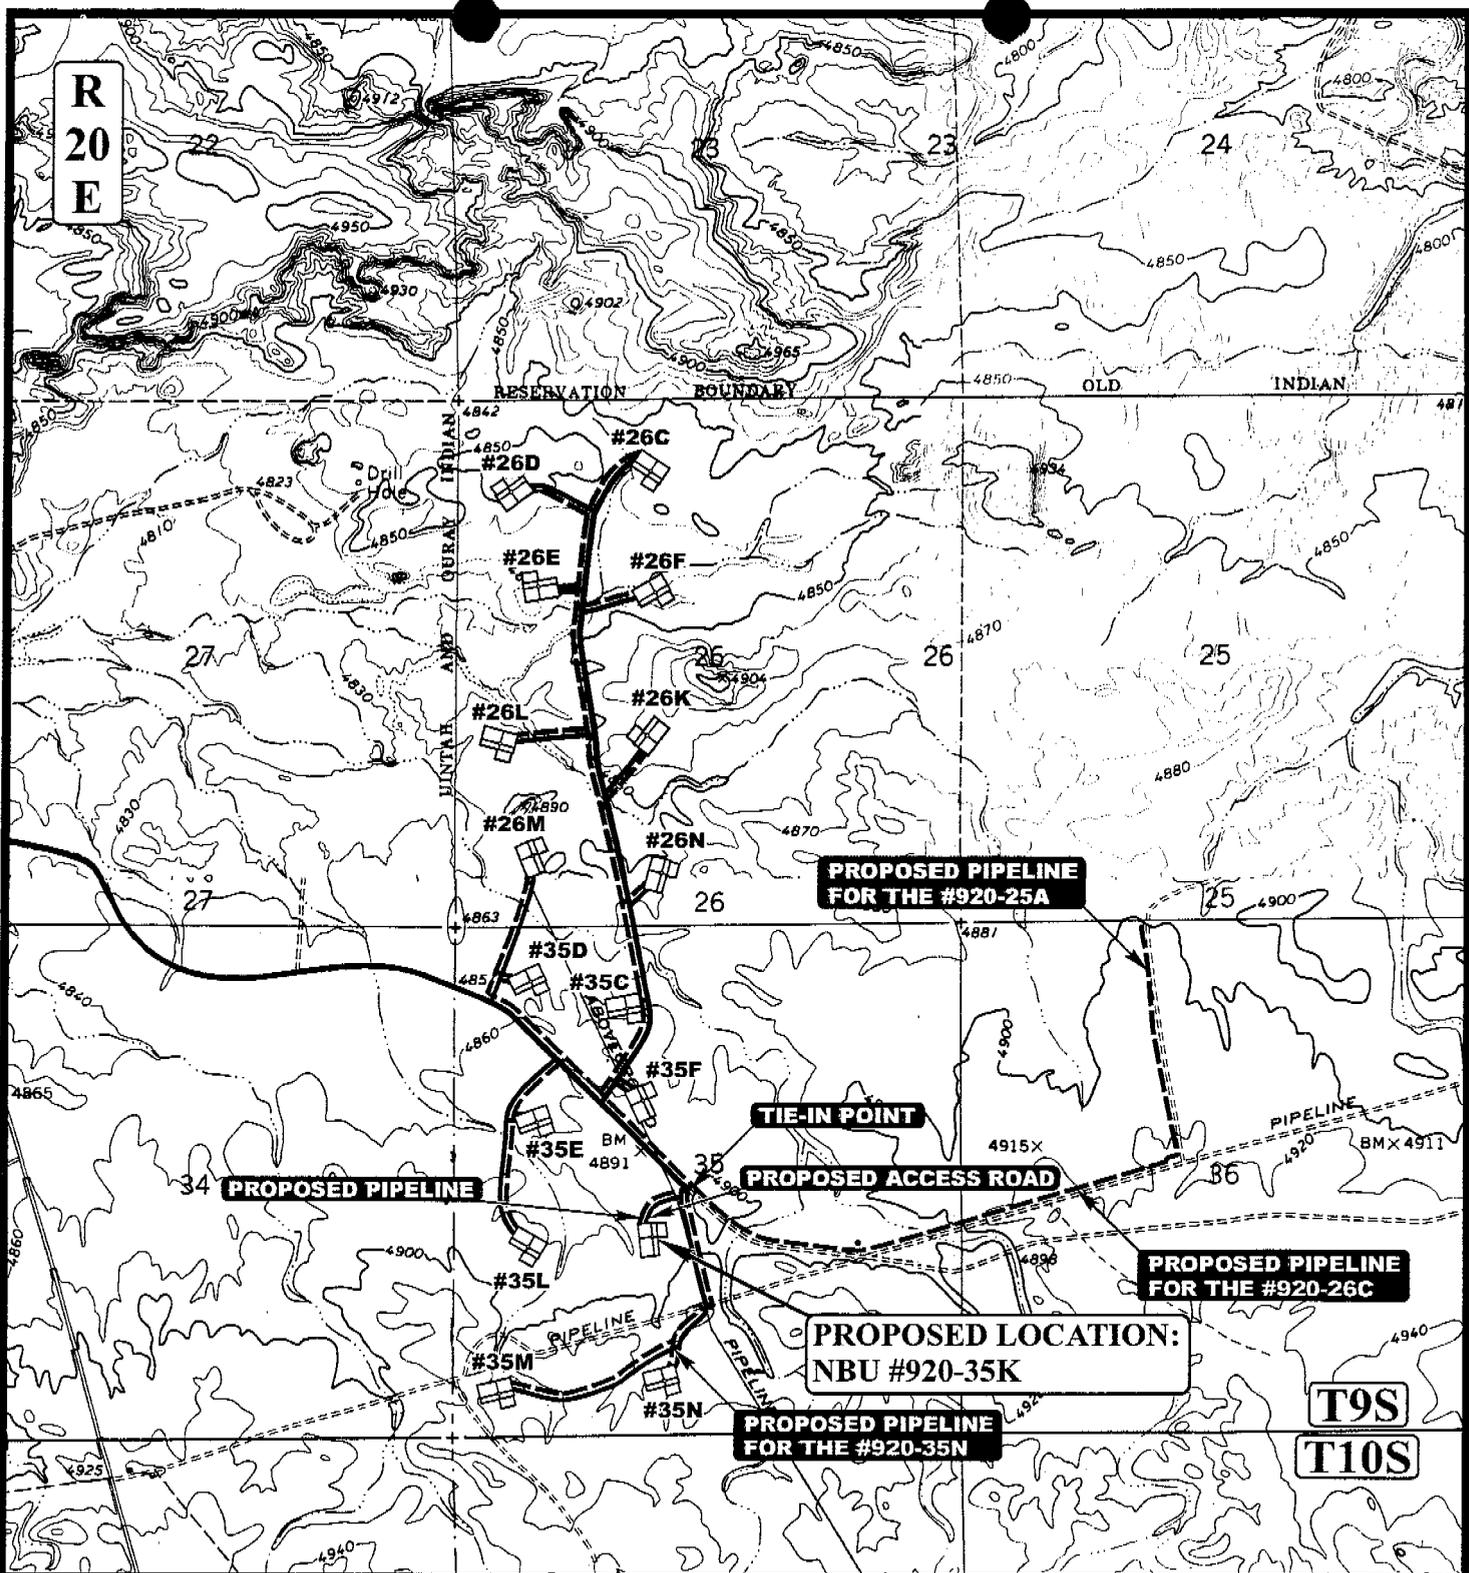

APPROXIMATE TOTAL PIPELINE DISTANCE = 614' +/-

LEGEND:

-  PROPOSED ACCESS ROAD
-  PROPOSED PIPELINE
-  PROPOSED PIPELINE (SERVICING OTHER WELLS)

WESTPORT OIL AND GAS COMPANY, L.P.

NBU #920-35K

SECTION 35, T9S, R20E, S.L.B.&M.

2075' FSL 2066' FWL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813




TOPOGRAPHIC
MAP

06	21	05
MONTH	DAY	YEAR

SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 07-07-05

D
TOPO

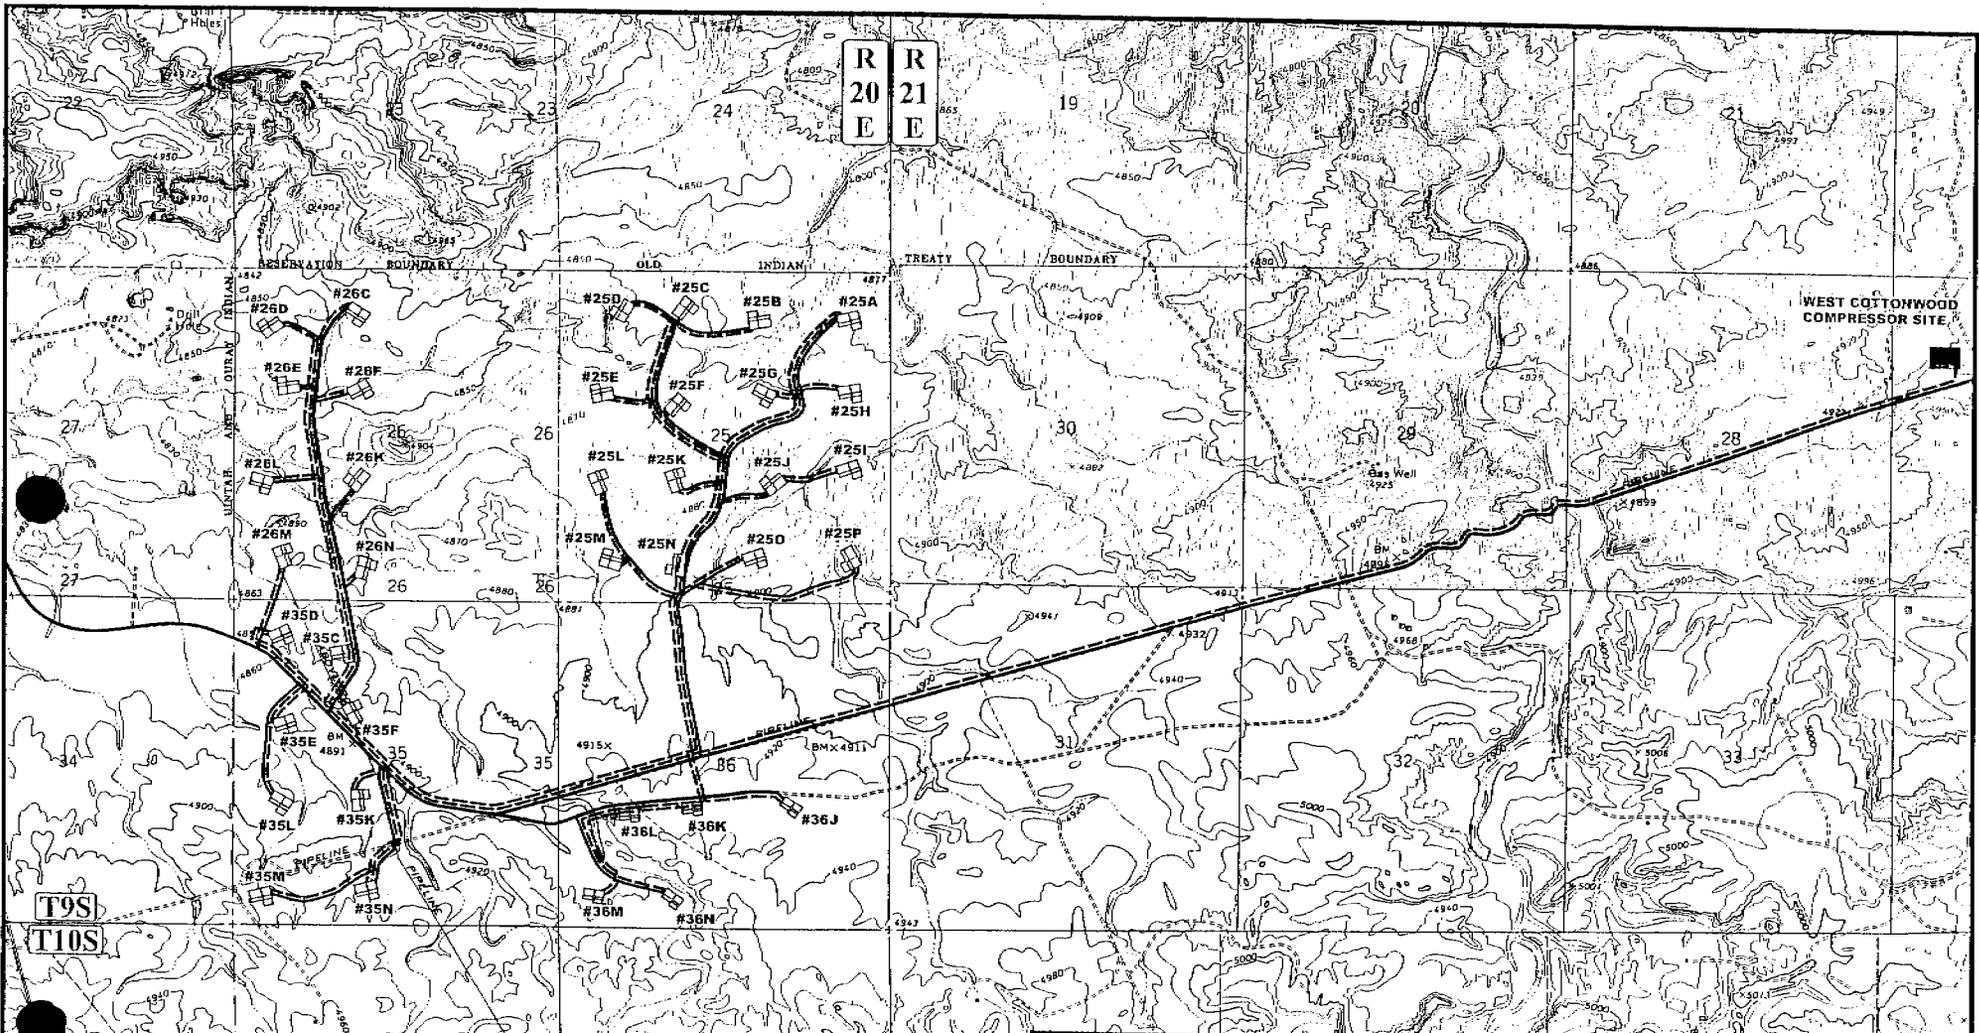

R 20 E
R 21 E

T9S
T10S

LEGEND:

-----	4" PIPELINE
-----	6" PIPELINE
-----	8" PIPELINE

U&L S Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

WESTPORT OIL AND GAS COMPANY, L.P.
 PIPELINE SYSTEM
 SECTIONS 25, 26, 35, 36, T9S, R20E, S.L.B.&M.
 SECTIONS 27, 28, 29, 31, 32, T9S, R21E, S.L.B.&M.

TOPOGRAPHIC MAP 08 15 05
 MONTH DAY YEAR
 SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00 **D1**

WESTPORT OIL AND GAS COMPANY, L.P.


FIGURE #1

LOCATION LAYOUT FOR

NBU #920-35K

SECTION 35, T9S, R20E, S.L.B.&M.

2075' FSL 2066' FWL





CONSTRUCT DIVERSION DITCH

C-1.7' El. 83.2'

C-0.4' El. 81.9'

SCALE: 1" = 50'
DATE: 06-15-05
Drawn By: L.K.

NOTE:
Flare Pit is to be located a min. of 100' from the Well Head.

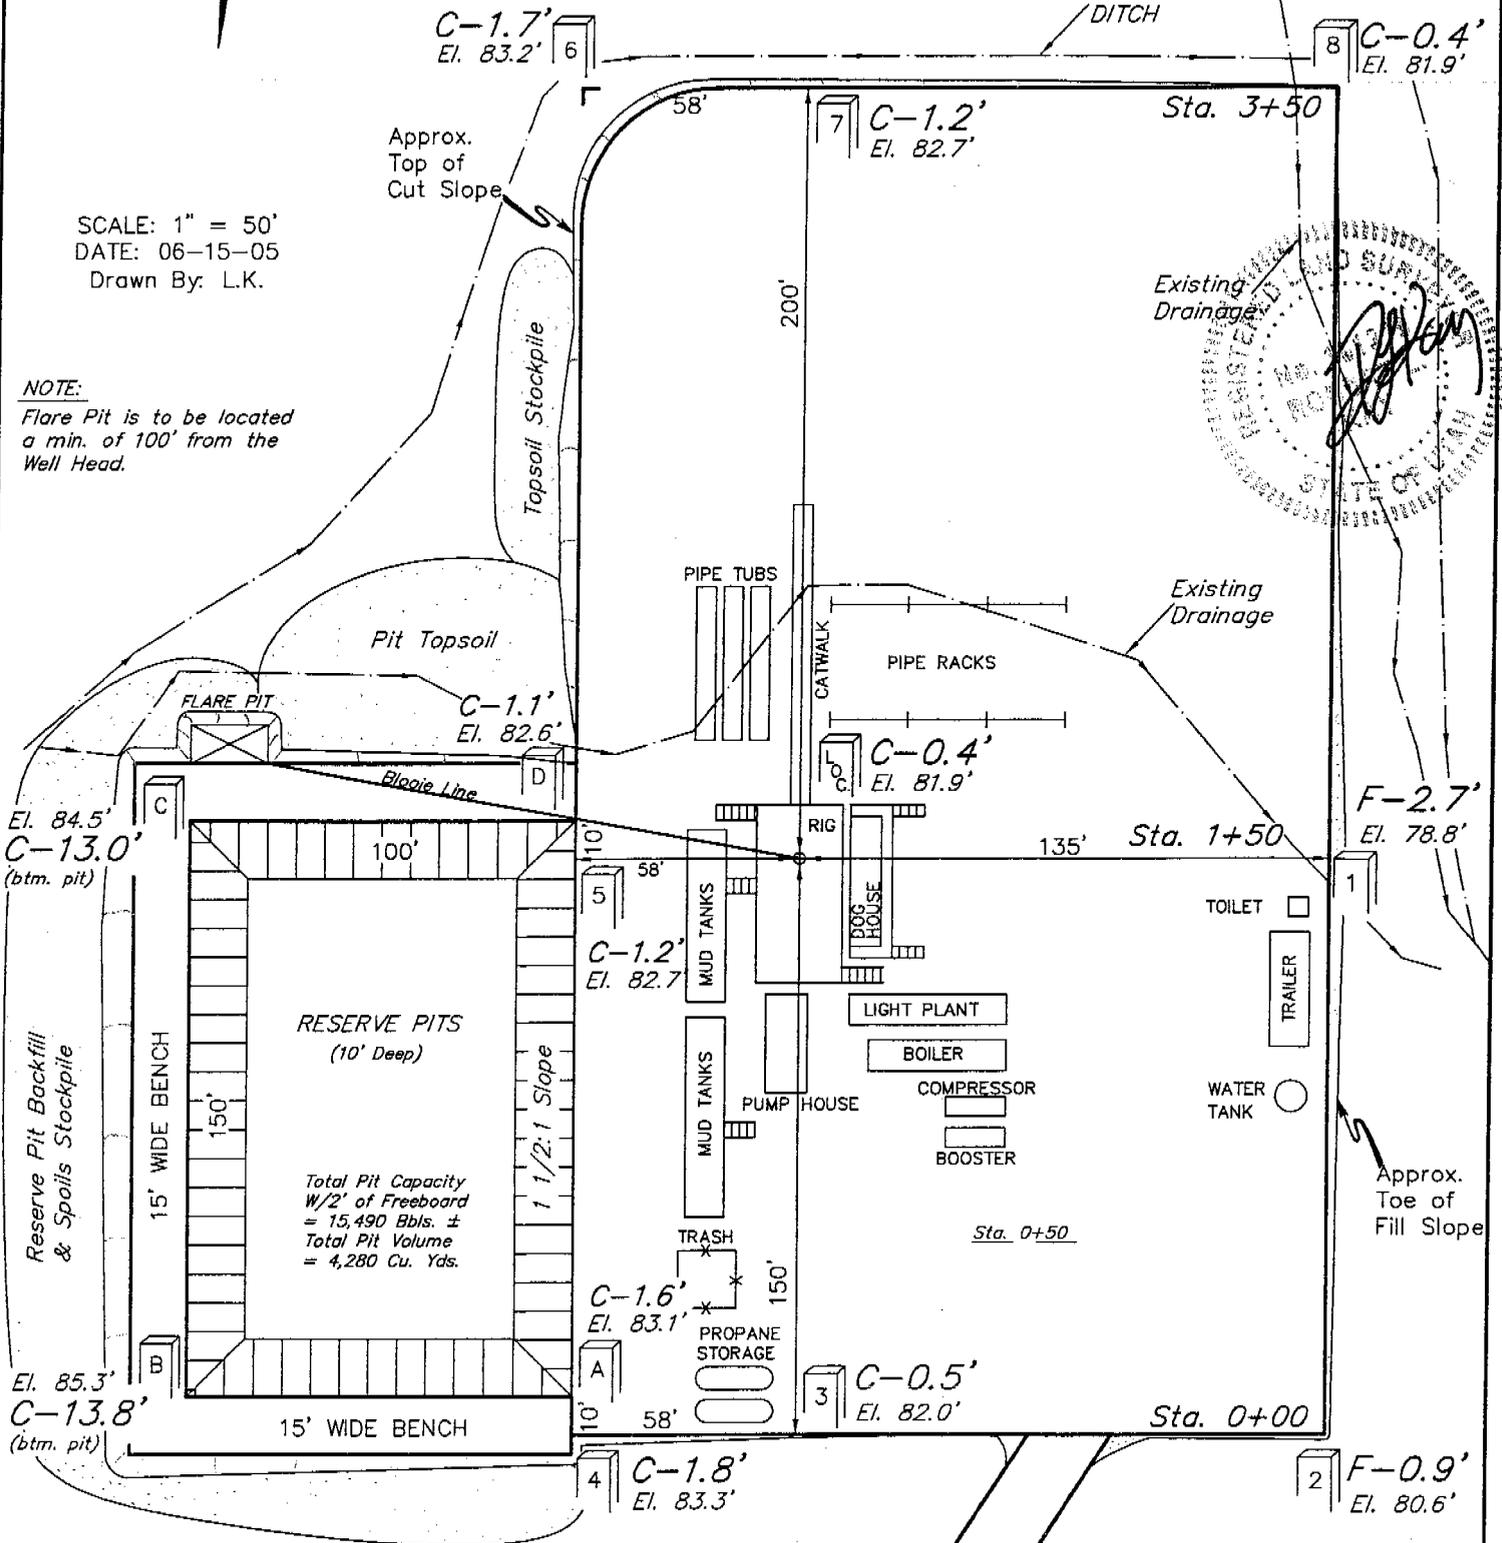

NOTES:

Elev. Ungraded Ground At Loc. Stake = 4881.9'
FINISHED GRADE ELEV. AT LOC. STAKE = 4881.5'

WESTPORT OIL AND GAS COMPANY, L.P.

FIGURE #2

TYPICAL CROSS SECTIONS FOR


NBU #920-35K

SECTION 35, T9S, R20E, S.L.B.&M.

2075' FSL 2066' FWL

1" = 20'
X-Section
Scale
1" = 50'

DATE: 06-15-05
Drawn By: L.K.

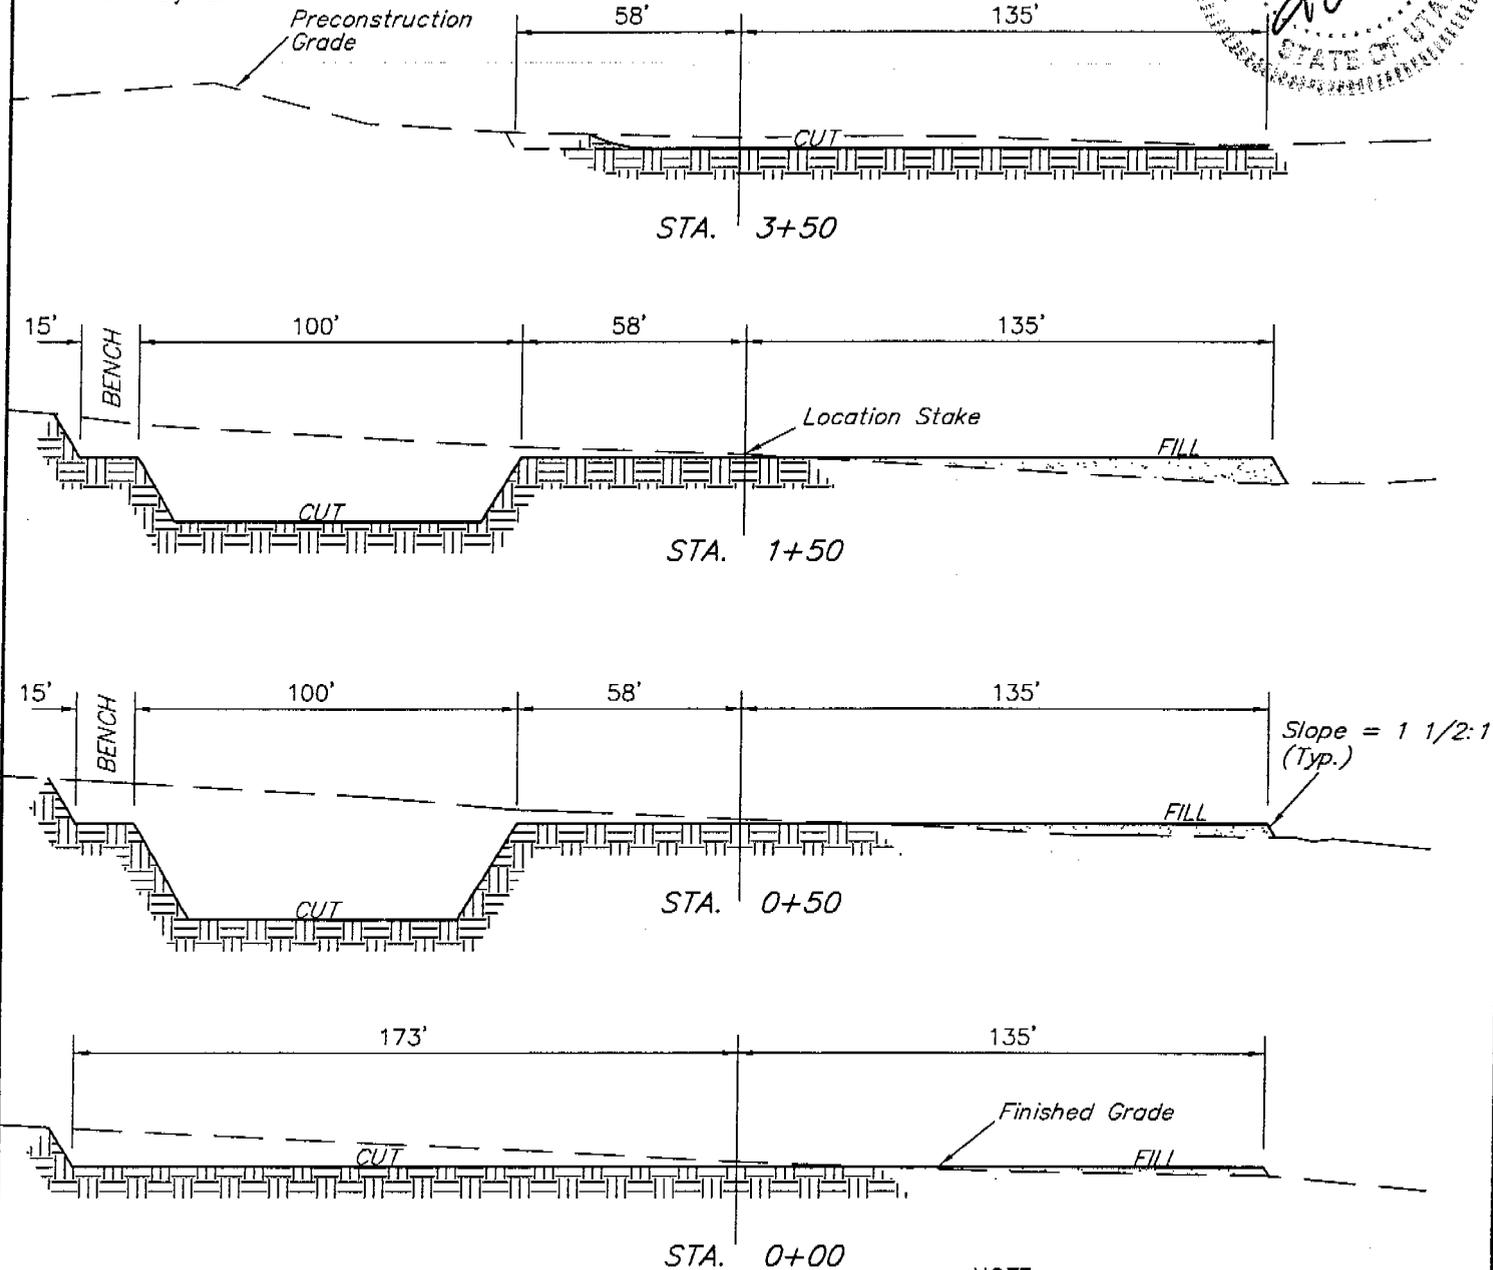

* NOTE:
FILL QUANTITY INCLUDES
5% FOR COMPACTION

NOTE:
Topsoil should not be
Stripped Below Finished
Grade on Substructure Area.

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,740 Cu. Yds.
Remaining Location	= 6,800 Cu. Yds.
TOTAL CUT	= 8,540 CU.YDS.
FILL	= 2,140 CU.YDS.

EXCESS MATERIAL	= 6,400 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,880 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 2,520 Cu. Yds.

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 08/19/2005

API NO. ASSIGNED: 43-047-37024

WELL NAME: NBU 920-35K
 OPERATOR: WESTPORT OIL & GAS CO (N2115)
 CONTACT: DEBRA DOMENICI

PHONE NUMBER: 435-781-7060

PROPOSED LOCATION:

NESW 35 090S 200E
 SURFACE: 2075 FSL 2066 FWL
 BOTTOM: 2075 FSL 2066 FWL
 UINTAH
 NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal
 LEASE NUMBER: UTU-460
 SURFACE OWNER: 1 - Federal
 PROPOSED FORMATION: WSMVD
 COALBED METHANE WELL? NO

LATITUDE: 39.98970
 LONGITUDE: -109.6349

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. CO-1203)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 43-8496)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)

LOCATION AND SITING:

- R649-2-3.
- Unit NATURAL BUTTES
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: 173-14
Eff Date: 12-2-99
Siting: 460' fr u bary C uncomm. tract
- R649-3-11. Directional Drill

COMMENTS: See Separate file

STIPULATIONS: 1- Federal approval
2- Oil Shale

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:
3160
(UT-922)

August 25, 2005

Memorandum

To: Assistant District Manager Minerals, Vernal District
From: Michael Coulthard, Petroleum Engineer
Subject: 2005 Plan of Development Natural Buttes Unit Uintah
County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2005 within the Natural Buttes Unit, Uintah County, Utah.

API#	WELL NAME	LOCATION
------	-----------	----------

(Proposed PZ Wasatch-MesaVerde)

43-047-36998	NBU 920-25K	Sec 25 T09S R20E 2025 FSL 1908 FWL
43-047-36999	NBU 920-25L	Sec 25 T09S R20E 1993 FSL 0650 FWL
43-047-37000	NBU 920-25M	Sec 25 T09S R20E 0696 FSL 0841 FWL
43-047-37001	NBU 920-25N	Sec 25 T09S R20E 0584 FSL 1888 FWL
43-047-37002	NBU 920-25O	Sec 25 T09S R20E 0724 FSL 2156 FEL
43-047-37003	NBU 920-25P	Sec 25 T09S R20E 0707 FSL 0666 FEL
43-047-37005	NBU 920-25C	Sec 25 T09S R20E 0579 FNL 2047 FWL
43-047-37006	NBU 920-25D	Sec 25 T09S R20E 0627 FNL 1002 FWL
43-047-37007	NBU 920-25E	Sec 25 T09S R20E 2005 FNL 0666 FWL
43-047-37008	NBU 920-25F	Sec 25 T09S R20E 2194 FNL 1924 FWL
43-047-37009	NBU 920-25G	Sec 25 T09S R20E 2012 FNL 2051 FEL
43-047-37010	NBU 920-25J	Sec 25 T09S R20E 1956 FSL 1903 FEL
43-047-37012	NBU 920-26C	Sec 26 T09S R20E 0740 FNL 1996 FWL
43-047-37013	NBU 920-26D	Sec 26 T09S R20E 0938 FNL 0552 FWL
43-047-37014	NBU 920-26E	Sec 26 T09S R20E 1926 FNL 0841 FWL
43-047-37015	NBU 920-26F	Sec 26 T09S R20E 1997 FNL 2053 FWL
43-047-37016	NBU 920-26K	Sec 26 T09S R20E 1969 FSL 1986 FWL
43-047-37017	NBU 920-26L	Sec 26 T09S R20E 1907 FSL 0461 FWL
43-047-37018	NBU 920-26N	Sec 26 T09S R20E 0538 FSL 2143 FWL
43-047-37019	NBU 920-35C	Sec 35 T09S R20E 0865 FNL 1787 FWL

Page 2

API #	WELL NAME	LOCATION
(Proposed PZ Wasatch-MesaVerde)		
43-047-37023	NBU 920-35F	Sec 35 T09S R20E 1805 FNL 1962 FWL
43-047-37024	NBU 920-35K	Sec 35 T09S R20E 2075 FSL 2066 FWL
43-047-37026	NBU 920-35N	Sec 35 T09S R20E 0574 FSL 2195 FWL
43-047-37029	NBU 1021-14M	Sec 14 T10S R21E 1260 FSL 1330 FWL

This office has no objection to permitting the wells at this time.

/s/ Michael L. Coulthard

bcc: File – Natural Buttes Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron
Fluid Chron



State of Utah

Department of
Natural Resources

MICHAEL R. STYLER
Executive Director

Division of
Oil, Gas & Mining

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

August 25, 2005

Westport Oil & Gas Company, LP
1368 South 1200 East
Vernal, UT 84078

Re: Natural Buttes Unit 920-35K Well, 2075' FSL, 2066' FWL, NE SW, Sec. 35,
T. 9 South, R. 20 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-37024.

Sincerely,



Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: Westport Oil & Gas Company, LP
Well Name & Number Natural Buttes Unit 920-35K
API Number: 43-047-37024
Lease: UTU-460

Location: NE SW Sec. 35 T. 9 South R. 20 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

5. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

RECEIVED

AUG 17 2005

Form 3160-3
(August 1999)

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: DRILL REENTER

b. Type of Well: Oil Well Gas Well Other Single Zone Multiple Zone

2. Name of Operator
WESTPORT OIL & GAS COMPANY, L.P.

3A. Address
1368 SOUTH 1200 EAST, VERNAL, UTAH 84078

3b. Phone No. (include area code)
(435) 781-7060

4. Location of Well (Report location clearly and in accordance with any State requirements. *)
At surface NESW 2075' FSL 2066' FWL
At proposed prod. Zone

14. Distance in miles and direction from nearest town or post office*
8.9 MILES SOUTHEAST OF OURAY, UTAH

15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)
2066'

16. No. of Acres in lease
320

17. Spacing Unit dedicated to this well
40

18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.
REFER TO TOPO C

19. Proposed Depth
10000'

20. BLM/BIA Bond No. on file
CO-1203

21. Elevations (Show whether DF, KDB, RT, GL, etc.)
4881.9' GL

22. Approximate date work will start*
UPON APPROVAL

23. Estimated duration
TO BE DETERMINED

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- 1. Well plat certified by a registered surveyor.
- 2. A Drilling Plan.
- 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office.
- 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- 5. Operator certification.
- 6. Such other site specific information and/or plans as may be required by the authorized office.

25. Signature *Debra Domenici* Name (Printed/Typed) DEBRA DOMENICI Date 8/17/2005

Title ASSOCIATE ENVIRONMENTAL ANALYST

Approval by (Signature) *Thomas B. Cooney* Name (Printed/Typed) Date 02/13/2006

Title Assistant Field Manager Office Mineral Resources

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

NOTICE OF APPROVAL CONDITIONS OF APPROVAL ATTACHED

Accepted by
Utah Division
of Gas and Mineral Resources

FEB 16 2006



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East VERNAL, UT 84078 (435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: Westport Oil & Gas Company, L.P. **Location:** NESW, Sec. 35, T9S, R20E
Well No: NBU 920-35K **Lease No:** UTU-460
API No: 43-047-37024 **Agreement:** Natural Buttes Unit

Petroleum Engineer:	Matt Baker	Office: 435-781-4490	Cell: 435-828-4470
Petroleum Engineer:	Michael Lee	Office: 435-781-4432	Cell: 435-828-7875
Supervisory Petroleum Technician:	Jamie Sparger	Office: 435-781-4502	Cell: 435-828-3913
Environmental Scientist:	Paul Buhler	Office: 435-781-4475	Cell: 435-828-4029
Environmental Scientist:	Karl Wright	Office: 435-781-4484	
Natural Resource Specialist:	Holly Villa	Office: 435-781-4404	
Natural Resource Specialist:	Melissa Hawk	Office: 435-781-4476	
After hours contact number:	(435) 781-4513	FAX: (435) 781-4410	

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations.

NOTIFICATION REQUIREMENTS

Location Construction (Notify Holly Villa)	- Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Holly Villa)	- Prior to moving on the drilling rig.
Spud Notice (Notify PE)	- Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Jamie Sparger SPT)	- Twenty-Four (24) hours prior to running casing and cementing all casing strings.
BOP & Related Equipment Tests (Notify Jamie Sparger SPT)	- Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify PE)	- Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

**SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

- If paleontologic materials are uncovered during construction, the operator shall immediately stop work that might further disturb such materials and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation will be necessary for the discovered paleontologic material.
- Paint all facilities Fuller O'Brian color Carlsbad Canyon (2.5Y 6/2). Any paint brand may be used provided the colors match.
- The lessee/operator is given notice that lands in the lease have been identified as containing crucial pronghorn (antelope) habitat. It is requested that the lessee/operator not initiate surface disturbing activities or drilling from May 15 through June 20. A survey may be conducted by a qualified biologist or a BLM representative during this timing period to determine if pronghorn are in the area.
- The following interim seed mixture shall be used:

Type		lbs./acre
Needle and Threadgrass	<i>Stipa commata</i>	4
Indian Ricegrass	<i>Stipa hymenoides</i>	4
Crested Wheatgrass	<i>Agropyron cristatum</i>	4
** Seed shall be drilled; but if broadcasted double the pounds per acre used and work the solids mechanically to cover the seed.		

- All pounds are in pure live seed.
 - Reseeding may be required if first seeding is not successful.
- The topsoil from the reserve pit shall be stripped and piled separately near the reserve pit. When the reserve pit is closed, it shall be recontoured and the topsoil respread, and the area shall be seeded in the same manner as the location topsoil.
- Following well plugging and abandonment, the location, access roads, pipelines, and other facilities shall be reclaimed. All disturbed surfaces shall be reshaped to approximate the original contour; the top soil respread over the surface; and, the surface revegetated. The surface of approved staging areas where construction activities did not occur may require disking or ripping and reseeded.
- Within 90 calendar days of the approval date for this Application for Permit to Drill (APD), the operator/lessee shall submit to the Authorized Officer (AO), on Sundry Notice Form 3160-5, an Interim Surface Reclamation Plan for surface disturbance on well pads, access roads, and pipelines. At a minimum, this will include the reshaping of the pad to the original contour to the extent possible; the respreading of the top soil up to the rig anchor points; and, the area reseeded using appropriate reclamation methods. The AO will provide written approval or concurrence within 30 calendar days of receipt.

DOWNHOLE CONDITIONS OF APPROVAL

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

SITE SPECIFIC DOWNHOLE CONDITIONS OF APPROVAL

- None

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well. Any changes in operation must have prior approval from the BLM, Vernal Field Office Petroleum Engineers.
- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- **Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.**
- Blowout prevention equipment (BOPE) will remain in use until the well is completed or abandoned. Closing unit controls must remain unobstructed and readily accessible at all times. Choke manifolds must be located outside of the rig substructure.
- All BOPE components will be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests must be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test must be reported in the driller's log.
- BOP drills must be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- All shows of fresh water and minerals will be reported and protected. A sample will be taken of any water flows and a water analysis furnished the BLM, Vernal Field Office. All oil and gas shows will be adequately tested for commercial possibilities, reported, and protected.

- No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the BLM, Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM, Vernal Field Office must be obtained and notification given before resumption of operations.
- Chronologic drilling progress reports must be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- Any change in the program must be approved by the BLM, Vernal Field Office. "Sundry Notices and Reports on Wells" (Form BLM 3160-5) must be filed for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.
- Emergency approval may be obtained orally, but such approval does not waive the written report requirement. Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, will require the filing of a suitable plan pursuant to Onshore Oil & Gas Order No. 1 of 43 CFR 3164.1 and prior approval by the BLM, Vernal Field Office.
- In accordance with 43 CFR 3162.4-3, this well must be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) will be submitted only when requested by the BLM, Vernal Field Office.
- **Please submit an electronic copy of all logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM. The cement bond log must be submitted in raster format (TIF, PDF other).**
- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the BLM, Vernal Field Office.
- All measurement points shall be identified as point of sales or allocation for royalty determination prior to the installation of facilities.
- Oil and gas meters will be calibrated in place prior to any deliveries. The Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration

and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the BLM, Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement.

- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM, Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- This APD is approved subject to the requirement that, should the well be successfully completed for production, the BLM, Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and / or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas will be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from Field Office Petroleum Engineers.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events as defined in NTL3A, will be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.

- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU-460

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
NATURAL BUTTES

8. Well Name and No.
NBU 920-35K

9. API Well No.
43-047-37024

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH, UTAH

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
KERR-MCGEE OIL & GAS ONSHORE LP

3a. Address
1368 SOUTH 1200 EAST, VERNAL, UTAH 84078

3b. Phone No. (include area code)
435-781-7060

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
**NESW SEC 35-T9S-R20E
 2075' FSL 2066' FWL**

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input checked="" type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	INTERIM SURFACE
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	RECLAMATION PLAN

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

WHEN THE PIT IS BACKFILLED, WITHIN 180 DAYS OF WELL COMPLETION, OPERATOR SHALL SPREAD THE TOPSOIL PILE ON THE LOCATION UP TO THE RIG ANCHOR POINTS. THE LOCATION WILL BE RESHAPED TO THE ORIGINAL CONTOUR TO THE EXTENT POSSIBLE. OPERATOR WILL RESEED THE AREA USING THE BLM RECOMMENDED SEED MIXTURE AND RECLAMATION METHODS.

Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) DEBRA DOMENICI	Title ASSOCIATE ENVIRONMENTAL ANALYST
Signature <i>Debra Domenici</i>	Date February 15, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED
FEB 21 2006
DIV OF OIL, GAS & MINING

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING

1. DJJ

2. CDW

X Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

1/6/2006

FROM: (Old Operator):

N2115-Westport Oil & Gas Co., LP
 1368 South 1200 East
 Vernal, UT 84078
 Phone: 1-(435) 781-7024

TO: (New Operator):

N2995-Kerr-McGee Oil & Gas Onshore, LP
 1368 South 1200 East
 Vernal, UT 84078
 Phone: 1-(435) 781-7024

CA No.

Unit:

NATURAL BUTTES UNIT

WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
-----------	-----	-----	-----	--------	-----------	------------	-----------	-------------

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 5/10/2006
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 5/10/2006
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- a. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- b. If **NO**, the operator was contacted on:
- 5a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- 5b. Inspections of LA PA state/fee well sites complete on: n/a 3 LA wells & all PA wells transferred
- 5c. Reports current for Production/Disposition & Sundries on: ok
- 6. Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 3/27/2006 BIA not yet
- 7. Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: 3/27/2006
- 8. Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: n/a
- 9. Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on:

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 5/15/2006
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 5/15/2006
- Bond information entered in RBDMS on: 5/15/2006
- Fee/State wells attached to bond in RBDMS on: 5/16/2006
- Injection Projects to new operator in RBDMS on: _____
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a Name Change Only

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: CO1203
- Indian well(s) covered by Bond Number: RLB0005239
- (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0005236
- a. The **FORMER** operator has requested a release of liability from their bond on: n/a rider added KMG
The Division sent response by letter on: _____

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 5/16/2006

COMMENTS:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State

UINTAH COUNTY, UTAH

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

KERR-McGEE OIL & GAS ONSHORE LP

3a. Address

1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEE ATTACHED

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other <u>CHANGE OF OPERATOR</u>

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

PLEASE BE ADVISED THAT KERR-McGEE OIL & GAS ONSHORE LP, IS CONSIDERED TO BE THE OPERATOR OF THE ATTACHED WELL LOCATIONS. EFFECTIVE JANUARY 6, 2006. KERR-McGEE OIL & GAS ONSHORE LP, IS RESPONSIBLE UNDER TERMS AND CONDITIONS OF THE LEASE(S) FOR THE OPERATIONS CONDUCTED UPON LEASE LANDS. BOND COVERAGE IS PROVIDED BY STATE OF UTAH NATIONWIDE BOND NO. RLB0005237.

RECEIVED

MAY 10 2006

DIV. OF OIL, GAS & MINING

BLM BOND = C01203

BIA BOND = RLB0005239

APPROVED 5/16/06

Earlene Russell

Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

RANDY BAYNE

Signature

Randy Bayne

Title

DRILLING MANAGER

Date

May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

WESTPORT OIL & GAS COMPANY L.P.

3a. Address

1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEE ATTACHED

5. Lease Serial No.

MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

MULTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State

UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

EFFECTIVE JANUARY 6, 2006, WESTPORT OIL & GAS COMPANY L.P., HAS RELINQUISHED THE OPERATORSHIP OF THE ATTACHED WELL LOCATIONS TO KERR-McGEE OIL & GAS ONSHORE LP.

APPROVED 5/16/06
Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

RECEIVED
MAY 10 2006

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

BRAD LANEY

Title

ENGINEERING SPECIALIST

Signature

Date

May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Brad Laney

Title

Date

5-9-06

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT
Colorado State Office
2850 Youngfield Street
Lakewood, Colorado 80215-7076

IN REPLY REFER TO:

CO922 (MM)
3106
COC017387 et. al.

March 23, 2006

NOTICE

Kerr-McGee Oil & Gas Onshore L.P. :
1999 Broadway, Suite 3700 : Oil & Gas
Denver, CO 80202 :

Merger/Name Change - Recognized

On February 28, 2006 this office received acceptable evidence of the following mergers and name conversion:

Kerr-McGee Oil & Gas Onshore L.P., a Delaware Limited Partnership, and Kerr-McGee Oil & Gas Onshore LLC, a Delaware Limited Partnership merger with and into Westport Oil and Gas Company L.P., a Delaware Limited Partnership, and subsequent Westport Oil & Gas Company L.P. name conversion to Kerr-McGee Oil & Gas Onshore L.P.

For our purposes the merger and name conversion was effective January 4, 2006, the date the Secretary of State of Delaware authenticated the mergers and name conversion.

Kerr-McGee Oil & Gas Onshore L.P. provided a list of oil and gas leases held by the merging parties with the request that the Bureau of Land Management change all their lease records from the named entities to the new entity, Kerr-McGee Oil & Gas Onshore L.P. In response to this request each state is asked to retrieve their own list of leases in the names of these entities from the Bureau of Land Management's (BLM) automated LR2000 data base.

The oil and gas lease files identified on the list provided by Kerr-McGee Oil & Gas Onshore L.P. have been updated as to the merger and name conversion. We have not abstracted the lease files to determine if the entities affected by the acceptance of these documents holds an interest in the lease, nor have we attempt to identify leases where the entity is the operator on the ground that maintains vested record title or operating rights interests. If additional documentation, for change of operator, is required you will be contacted directly by the appropriate Field Office. The Mineral Management Services (MMS) and other applicable BLM offices were notified of the merger with a copy of this notice

Please contact this office if you identify additional leases where the merging party maintains an interest, under our jurisdiction, and we will document the case files with a copy of this notice. If the leases are under the jurisdiction of another State Office that information will be forwarded to them for their action.

Three riders accompanied the merger/name conversion documents which will add Kerr-McGee Oil and Gas Onshore LLC as a principal to the 3 Kerr-McGee bonds maintained by the Wyoming State Office. These riders will be forward to them for their acceptance.

The Nationwide Oil & Gas Continental Casualty Company Bond #158626364 (BLM Bond #CO1203), maintained by the Colorado State Office, will remain in full force and effect until an assumption rider is accepted by the Wyoming State Office that conditions their Nationwide Safeco bond to accept all outstanding liability on the oil and gas leases attached to the Colorado bond.

If you have questions about this action you may call me at 303.239.3768.

/s/Martha L. Maxwell
Martha L. Maxwell
Land Law Examiner
Fluid Minerals Adjudication

Attachment:

List of OG Leases to each of the following offices:

MMS MRM, MS 357B-1

WY, UT, NM/OK/TX, MT/ND, WY State Offices

CO Field Offices

Wyoming State Office

Rider #1 to Bond WY2357

Rider #2 to Bond WY1865

Rider #3 to Bond WY1127



United States Department of the Interior



BUREAU OF LAND MANAGEMENT
Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155
<http://www.blm.gov>

IN REPLY REFER TO:
3106
(UT-922)

March 27, 2006

Memorandum

To: Vernal Field Office

From: Chief, Branch of Fluid Minerals

Subject: Merger Approval

Attached is an approved copy of the merger recognized by the Bureau of Land Management, Colorado State Office. We have updated our records to reflect the merger from Westport Oil and Gas Company L.P. into Kerr-McGee Onshore Oil and Gas Company. The merger was approved effective January 4, 2006.

Chief, Branch of
Fluid Minerals

Enclosure

Approval letter from BLM COSO (2 pp)

cc: MMS, Reference Data Branch, James Sykes, PO Box 25165, Denver CO 80225
State of Utah, DOGM, Attn: Earlene Russell, PO Box 145801, SLC UT 84114
Teresa Thompson
Joe Incardine
Connie Seare
Dave Mascarenas
Susan Bauman

RECEIVED

MAR 28 2006

DIV. OF OIL, GAS & MINERAL

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
KERR MCGEE OIL AND GAS ONSHORE LP

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
435-781-7003

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
**2075' FSL 2066' FWL
 NESW, SEC 35-T9S-R20E**

5. Lease Serial No.
UTU-460

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
NATURAL BUTTES UNIT

8. Well Name and No.
NBU 920-35K

9. API Well No.
4304737024

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Deepen
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Alter Casing
	<input type="checkbox"/> Fracture Treat
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Change Plans
	<input type="checkbox"/> Plug and Abandon
	<input type="checkbox"/> Convert to Injection
	<input type="checkbox"/> Plug Back
	<input type="checkbox"/> Production (Start/Resume)
	<input type="checkbox"/> Reclamation
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Well Integrity
	<input checked="" type="checkbox"/> Other <u>APD EXTENSION</u>
	<u>DOG M</u>

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

THE OPERATOR REQUESTS AUTHORIZATION FOR A ONE YEAR EXTENSION FOR THE SUBJECT WELL LOCATION SO THAT THE DRILLING OPERATIONS MAY BE COMPLETED. THE ORIGINAL APD WAS APPROVED BY THE DIVISION OF OIL, GAS AND MINING ON AUGUST 25, 2005.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 07-27-06
By: [Signature]

COPIES SENT TO OPERATOR
Date: 9-20-06
Initials: [Signature]

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) RAMEY HOOPES	Title REGULATORY CLERK
Signature <u>Ramey Hoopes</u>	Date July 12, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED

JUL 25 2006

DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304737024
Well Name: NBU 920-35K
Location: NESW, SEC 35-T9S-R20E
Company Permit Issued to: KERR MCGEE OIL AND GAS ONSHORE LP
Date Original Permit Issued: 8/25/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No


Signature

7/12/2006

Date

Title: REGULATORY CLERK

Representing: KERR MCGEE OIL AND GAS ONSHORE L

RECEIVED

JUL 25 2006

DIV. OF OIL, GAS & MINING

UNITED STATES

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

RECEIVED DEPARTMENT OF THE INTERIOR
VERNAL FIELD OFFICE BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

DEPT OF THE INTERIOR
BUREAU OF LAND MGMT.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

5. Lease Serial No.
UTU-460

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
NATURAL BUTTES UNIT

8. Well Name and No.
NBU 920-35K

9. API Well No.
4304737024

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH, UTAH

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
KERR MCGEE OIL AND GAS ONSHORE LP

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
435-781-7003

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
2075' FSL 2066' FWL
NESW, SEC 35-T9S-R20E

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other APD EXTENSION
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	BLM _____
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	_____

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

THE OPERATOR REQUESTS AUTHORIZATION FOR A ONE YEAR EXTENSION FOR THE SUBJECT WELL LOCATION SO THAT THE DRILLING OPERATIONS MAY BE COMPLETED. THE ORIGINAL APD WAS APPROVED BY THE BUREAU OF LAND MANAGEMENT ON FEBURARY 13, 2006.

RECEIVED
MAR 05 2007

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) RAMEY HOOPES Title REGULATORY CLERK

Signature *Ramey Hoopes* Date January 23, 2007

DIV. OF OIL, GAS & MINING

THIS SPACE FOR FEDERAL OR STATE USE

Approved by *[Signature]* Title **Petroleum Engineer** Date **FEB 6 2007**

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Office _____

Under Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false or fraudulent statements or representations as to any matter within its jurisdiction.

CONDITIONS OF APPROVAL ATTACHED

UDOCM

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304737024
Well Name: NBU 920-35K
Location: NESW, SEC 35-T9S-R20E
Company Permit Issued to: KERR MCGEE OIL AND GAS ONSHORE LP
Date Original Permit Issued: 2/13/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No


Signature

1/23/2007
Date

Title: REGULATORY CLERK

Representing: Kerr McGee Oil and Gas Onshore LP

RECEIVED
MAR 05 2007
DIV. OF OIL, GAS & MINING

CONDITIONS OF APPROVAL

Kerr McGee Oil and Gas Onshore LP.

Notice of Intent APD Extension

Lease: UTU-460
Well: NBU 920-35K
Location: NESW Sec 35-T9S-R20E

An extension for the referenced APD is granted with the following conditions:

1. The extension and APD shall expire on 2/^{1,3}~~6~~/08.
2. No other extension shall be granted.

If you have any other questions concerning this matter, please contact Matt Baker of this office at (435) 781-4490

RECEIVED

MAR 05 2007

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU-460

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
NATURAL BUTTES UNIT

8. Well Name and No.
NBU 920-35K

9. API Well No.
4304737024

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH, UTAH

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
KERR MCGEE OIL AND GAS ONSHORE LP

3a. Address
1368 SOUTH 1200 EAST, VERNAL, UTAH 84078

3b. Phone No. (include area code)
(435)781-7003

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
**2075' FSL, 2066' FWL
NESW, SEC 35-T9S-R20E**

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>APD EXTENSION</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<u>DOGM</u>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

THE OPERATOR REQUESTS AUTHORIZATION FOR A ONE YEAR EXTENSION FOR THE SUBJECT WELL LOCATION SO THAT THE DRILLING OPERATIONS MAY BE COMPLETED. THE ORIGINAL APD WAS APPROVED BY THE DIVISION OF OIL, GAS AND MINING ON AUGUST 25, 2005.

Approved by
Utah Division of
Oil, Gas and Mining

6-21-07
RM
Date: 06-20-07
By: [Signature]

RECEIVED
JUN 21 2007
DIVISION OF OIL, GAS AND MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) RAMEY HOOPES	Title LAND SPECIALIST I
Signature <u>Ramey Hoopes</u>	Date June 8, 2007

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304737024
Well Name: NBU 920-35K
Location: NESW, SEC 35-T9S-R20E
Company Permit Issued to: KERR-MCGEE OIL AND GAS ONSHORE LP
Date Original Permit Issued: 8/25/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

Ramey Hoopes
Signature

6/8/2007
Date

Title: LAND SPECIALIST I

Representing: KERR-MCGEE OIL AND GAS ONSHORE L



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

May 23, 2008

Sheila Upchego
Kerr McGee O&G Onshore LP
1368 South 1200 East
Vernal UT 84078

43 047 37024
NBU 920-35K
9S 20E 35

Re: APDs Rescinded at the request of Kerr McGee O&G Onshore LP


Dear Ms. Upchego:

Enclosed find the list of APDs that you requested to be rescinded to Kerr McGee O&G Onshore LP. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded, effective May 28, 2008.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject locations.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal



Page 2
May 28, 2008
Subject:

Federal 920-35E
Federal 920-35L
NBU 920-35K
NBU 920-35N