

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT
(highlight changes)

APPLICATION FOR PERMIT TO DRILL		5. MINERAL LEASE NO: ML-47085	6. SURFACE: State
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>		7. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>		8. UNIT or CA AGREEMENT NAME:	
2. NAME OF OPERATOR: The Houston Exploration Company		9. WELL NAME and NUMBER: Buck Canyon 13-16-12-21	
3. ADDRESS OF OPERATOR: 1100 Louisiana, Suite 200 CITY Houston STATE TX ZIP 77002		PHONE NUMBER: (713) 830-6800	10. FIELD AND POOL, OR WILDCAT: Buck Canyon Under Signatures
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 639' FSL & 856' FWL AT PROPOSED PRODUCING ZONE: same as above		11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWSW 16 12S 21E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 52.5 miles south of Vernal, UT		12. COUNTY: Uintah	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 639'	16. NUMBER OF ACRES IN LEASE:	17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 40	
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) 1,600'	19. PROPOSED DEPTH: 8,000	20. BOND DESCRIPTION:	
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 6,308 GR	22. APPROXIMATE DATE WORK WILL START: 9/30/2005	23. ESTIMATED DURATION: 30 Days	

24. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT	SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT			
11"	8 5/8" J-55 36#	2,000	PREMIUM LITE II	250 SKS	3.38 CF	11.0 PPG
			CLASS "G"	329 SKS	1.2 CF	15.6 PPG
			Calcium Chloride	200 SKS	1.10 CF	15.6 PPG
7 7/8"	4 1/2" N-80 11.6#	8,000	PREMIUM LITE II	200 SKS	3.3 CF	11.0 PPG
			CLASS "G"	400 SKS	1.56 CF	14.3 PPG

25. ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:

- WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER
- EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER

- COMPLETE DRILLING PLAN
- FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER

CONFIDENTIAL

NAME (PLEASE PRINT) William A. Ryan TITLE Agent
SIGNATURE *William A. Ryan* DATE 9/6/2005

(This space for State use only)


API NUMBER ASSIGNED: 43-047-3718

**Approved by the
Utah Division of
Oil, Gas and Mining**
Date: 10-05-05
By: *[Signature]*

RECEIVED
SEP 09 2005
DIV. OF OIL, GAS & MINING

T12S, R21E, S.L.B.&M.

S89°52'W - 5272.08' (G.L.O.)

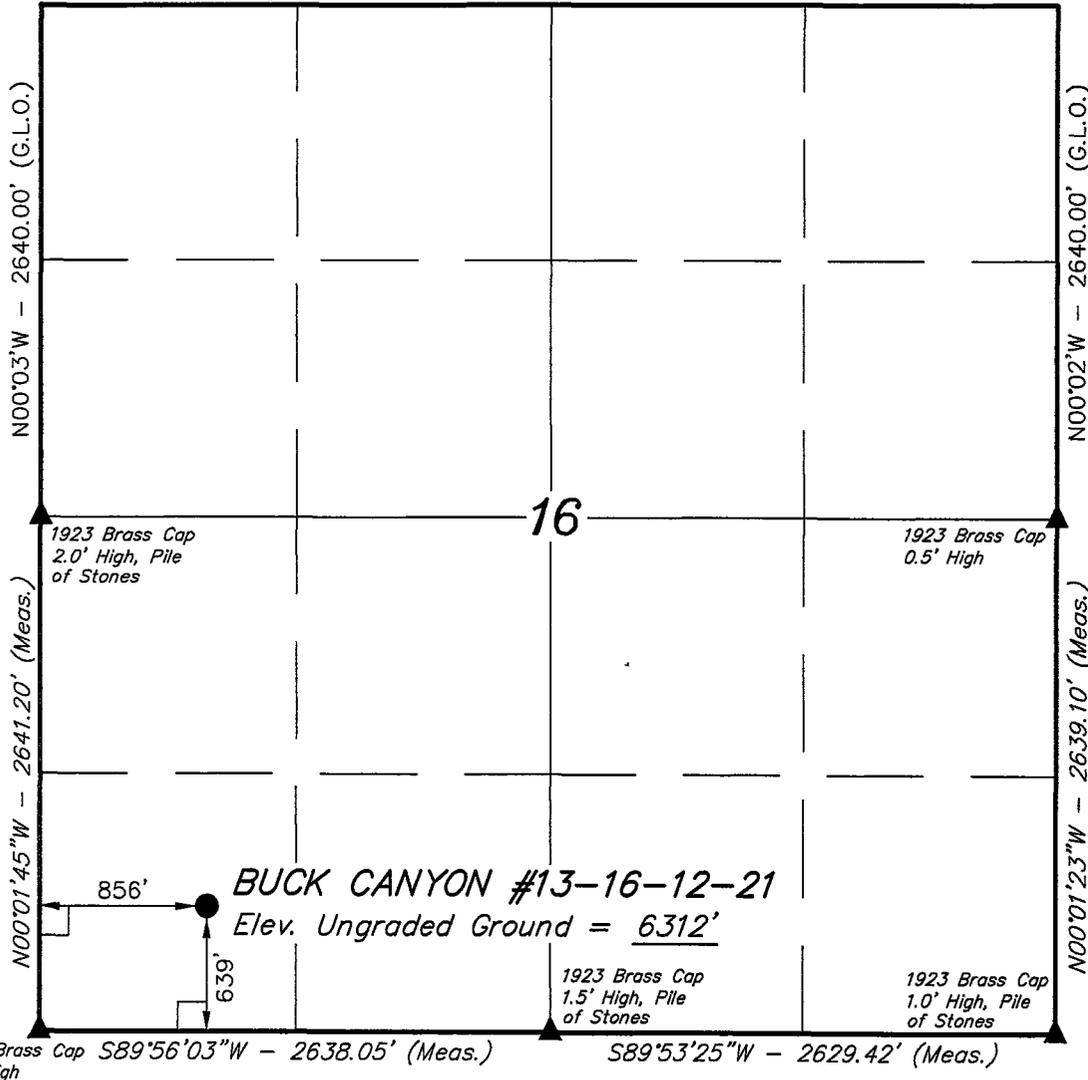

1923 Brass Cap S89°56'03"W - 2638.05' (Meas.)
1.0' High


S89°53'25"W - 2629.42' (Meas.)

THE HOUSTON EXPLORATION COMPANY

Well location, BUCK CANYON #13-16-12-21, located as shown in the SW 1/4 SW 1/4 of Section 16, T12S, R21E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION


BUCK TRIANGULATION STATION LOCATED IN THE SW 1/4 OF SECTION 23, T12S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN. SE QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 6546 FEET.

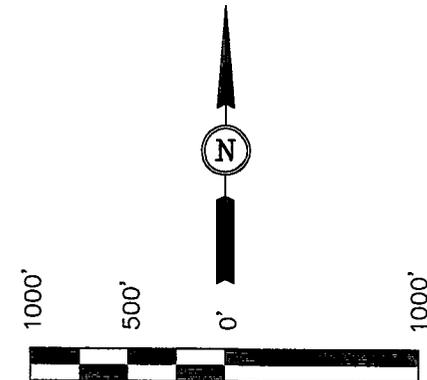

SCALE

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

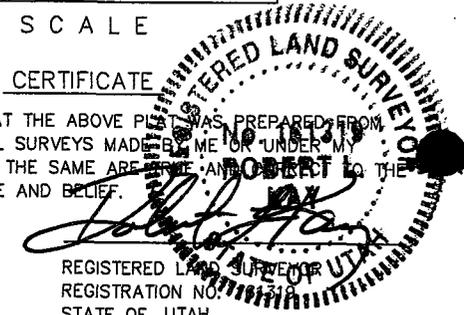

REGISTERED LAND SURVEYOR
REGISTRATION NO. 1231
STATE OF UTAH

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

(AUTONOMOUS NAD 83)
LATITUDE = 39°46'05.16" (39.768100)
LONGITUDE = 109°34'42.94" (109.578594)
(AUTONOMOUS NAD 27)
LATITUDE = 39°46'05.28" (39.768133)
LONGITUDE = 109°34'40.47" (109.577908)

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

UINTAH ENGINEERING & LAND SURVEYING

85 SOUTH 200 EAST - VERNAL, UTAH 84078

(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 08-16-05	DATE DRAWN: 08-23-05
PARTY B.H. B.W. P.M.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE THE HOUSTON EXPLORATION COMPANY	

Ten Point Plan

The Houston Exploration Company

Buck Canyon 13-16-12-21

Surface Location SW¹/₄ SW ¹/₄, Section 16, T. 12S., R. 21E.

1. Surface Formation

Green River

2. Estimated Formation Tops and Datum:

<u>Formation</u>	<u>Depth</u>	<u>Datum</u>
Green River	Surface	+6,308' G.L.
Uteland Butte Limestone	3,946	+2,362'
Wasatch	4,080	+2,228'
Mesaverda	5,747	+561'
Buck Tounge	8,080	-1,772'
Castlegate	8,152	-1,844'
Mancos	8,447	-2,139'
TD	8,000	-1,692'

A 11" hole will be drilled to 2,000' +/- . The hole depth will depend on the depth that the Birds Nest Zone is encountered. The hole will be drilled 400' beyond the top of the Birds Nest.

3. Producing Formation Depth:

Formation objective includes the Green River, Wasatch, Mesaverde and its sub-members.

Off Set Well information.

Drilling/ Permitted Well:

Buck Canyon 15-16-12-21

Buck Canyon 11-16-12-21

Buck Canyon 9-16-12-21

Abandoned Wells:

G #1-16

SQ #44-16

4. Proposed Casing:

<u>Hole Size</u>	<u>Casing Size</u>	<u>Weight/FT</u>	<u>Grade</u>	<u>Coupling & Tread</u>	<u>Casing Depth</u>	<u>New/Used</u>
11	8 5/8	36#	J-55	STC	2000	NEW
7 7/8	4 1/2	11.6#	M-55	LTC	T.D.	NEW

Cement Program:

The Surface Casing will be cemented to the Surface as follows:

	<u>Casing Size</u>	<u>Cement Type</u>	<u>Cement Amounts</u>	<u>Cement Yield</u>	<u>Cement Weight</u>
Lead:	8 5/8	Premium Lite II .05#/sk Static Free .25#/sk Cello Flake 5#/sk KOL Seal .002 gps FP-6L 10% Bentonite .5% Sodium Metasilicate 3% Potassium Chloride	250 sks. +/-	3.38ft ³ /sk	11.0 ppg
Tail:	8 5/8	Class "G" 2% Calcium Chloride .25#/sk Cello Flake	329 sks. +/-	1.2ft ³ /sk	15.6 ppg
Top Job:	8 5/8	4% Calcium Chloride .25#/sk Cello Flake	200 sks. +/-	1.10ft ³ /sk	15.6 ppg

Production casing will be cemented to 2,500' or higher as follows:

	<u>Casing Size</u>	<u>Cement Type</u>	<u>Cement Amounts</u>	<u>Cement Yield</u>	<u>Cement Weight</u>
Lead:	4 1/2	Premium Lite II .25#/sk Cello Flake .05#/sk Static Free 5#/sk Kol Seal 3% Potassium Chloride .055 gps FP-6L 10% Bentonite .5 Sodium Metasilicate	200 sks +/-	3.3ft ³ /sk	11.0 ppg
Tail:	4 1/2	Class "G" .05% Static Free 2 Sodium Chloride .1% R-3 2% Bentonite	400 sks +/-	1.56ft ³ /sk	14.3 ppg

5. BOP and Pressure Containment Data:

The anticipated bottom hole pressure will be less than 3000 psi.

A 3000-psi WP BOP system as described in the BOP and Pressure Containment Data (attached) will be installed and maintained from the 8 5/8" surface casing. The BOP system including the casing will be pressure tested to minimum standards set forth in "On Shore Order #2". The BOP will be mechanically checked daily during the drilling operation.

6. Mud Program:

<u>Interval</u>	<u>Mud weight lbs./gal.</u>	<u>Viscosity Sec./OT.</u>	<u>Fluid Loss MI/30 Mins.</u>	<u>Mud Type</u>
0-2000	Air/Clear Water	-----	No Control	Water/Gel
2000-T.D.	8.4-12.0	30	8-10	Water/Gel

7. Auxiliary Equipment

Upper Kelly cock, full opening stabbing valve, 2 1/2" choke manifold and pit level indicator.

8. Testing, Coring, Sampling and Logging:

- a) Test: None are anticipated.
- b) Coring: There is the possibility of sidewall coring.
- c) Sampling: Every 10' from 2000' to T.D.
- d) Logging:

Type	Interval
DLL/SFL W/GR and SP	T.D. to Surf. Csg
FDC/CNL W/GR and CAL	T.D. to Surf. Csg

9. Abnormalities (including sour gas):

No abnormal pressures, temperatures or other hazards are anticipated. Oil and gas shows are anticipated in the Wasatch Formation. Other wells drilled in the area have not encountered over pressured zones or H₂S.

10. Drilling Schedule:

The anticipated starting date is 9/30/2005, 2004. Duration of operations is expected to be 30 days.

THE HOUSTON EXPLORATION COMPANY

13 POINT SURFACE USE PLAN

FOR WELL

BUCK CANYON 13-16-12-21

LOCATED IN SW $\frac{1}{4}$ SW $\frac{1}{4}$

SECTION 16, T. 12S, R21E, S.L.B.&M.

UINTAH COUNTY, UTAH

LEASE NUMBER: ML-47085

SURFACE OWNERSHIP: STATE

1. Existing Roads:

To reach The Houston Exploration Co. well Buck Canyon 13-16-12-21 in Section 16, T12S, R 21E, Starting in Vernal, Utah:

Proceed in a westerly direction from Vernal, UT along US Highway 40 approximately 14.0 miles to the junction of State Hwy 88; exit left and proceed in a southerly direction approximately 17.0 miles to Ouray, UT; proceed in a southerly, then southeasterly direction approximately 19.5 miles on the Seep Ridge Road to the junction of this road and an existing two-track road to the southwest; turn right and proceed in a southwesterly, then southeasterly direction approximately 1.1 miles to the beginning of the proposed access to the southwest; follow road flags in a southwesterly direction approximately 0.9 miles to the proposed location.

Total distance from Vernal, Utah to the proposed well location is approximately 52.5 miles.

All existing roads to the proposed location are State of Utah, BLM maintained or County Class D roads. Please see the attached map for additional details.

2. Planned access road

The proposed access road will be approximately 4,752' +/- of new construction on lease.

The road will be graded once per year minimum and maintained.

- A) Approximate length 4752 ft
- B) Right of Way width 30 ft
- C) Running surface 18 ft
- D) Surface material Native soil
- E) Maximum grade 5%
- F) Fence crossing None
- G) Culvert None
- H) Turnouts None
- I) Major cuts and fills None
- J) Road Flagged Yes
- K) Access road surface ownership State
- L) All new construction on lease Yes
- M) Pipe line crossing None

Please see the attached location plat for additional details.

An off lease right-of-way will be required. An SF-299 R-o-W application has been filed with the BLM, Vernal Field Office to upgrade the off lease portion of existing two-track road for the Buck Canyon 9-16-12-21, which will be used to access the proposed location.

All surface disturbances for the road and location will be within the lease boundary.

3. Location of existing wells

The following wells are located within

for the first three months on new meter installations and at least quarterly thereafter. The authorized officer will be provided with a date and time for the initial meter calibration and all future meter-proving schedules. A copy of the meter calibration report will be submitted to the BLM's Vernal District office and State of Utah, Division of Oil, Gas, and Mining. All measurement facilities will conform to API (American Petroleum Institute) and AGA (American Gas Association) standards for gas and liquid hydrocarbon measurement.

5. Location and type of water supply

Water for drilling and cementing will come from Bitter Creek in Permit # T-75377.

6. Source of construction materials

All construction material for this location site and access road shall be borrow material accumulated during construction of the location site and access road. Additional road gravel or pit lining material will be obtained from private resources.

7. Methods for handling waste disposal

A) Pit construction and liners:

The reserve pit will be approximately **12 ft.** deep and most of the depth shall be below the surface of the existing ground

Please see the attached plat for details.

The reserve pit will be lined.

The reserve pit will be used to store water for drilling. A semi-closed system will be used to drill the well. All fresh water for drilling will come from a frac tank placed on location and from the rig tank. The pit will be used to hold non-flammable materials such as cuttings, salt, drilling fluids, chemicals, produced fluids, etc.

B) Produced fluids:

Produced water will be confined to the reserve pit, or if deemed necessary, a storage tank for a period not to exceed 90 days after initial production. During the 90-day period an application for approval for permanent disposal method and location will be submitted to the authorized officer. **Evaporation may be used instead of trucking to facilitate closing and reclamation of the reserve pit. A pumping system would be used for evaporation.**

C) Garbage:

A trash cage fabricated from expanded metal will be used to hold trash on location and will be removed to an authorized landfill location.

D) Sewage:

A portable chemical toilet will be supplied for human waste.

Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

E) Site clean-up:

After the rig is moved off the location the well site area will be cleaned and all refuse removed.

B) The net wire shall be no more than 2 inches above the ground. The barbed wire shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.

8. Ancillary facilities

There are no ancillary facilities planned at this time and none are foreseen for the future.

C) Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

9. Well-site layout

Location dimensions are as follows:

- A) Pad length 345 ft.
- B) Pad width 245 ft.
- C) Pit depth 12 ft.
- D) Pit length 150 ft.
- E) Pit width 75 ft.
- F) Max cut 22.3 ft.
- G) Max fill 13.5 ft.
- H) Total cut yds. 12,140 cu yds
- I) Pit location east end
- J) Top soil location south end
- K) Access road location south end
- L) Flare Pit corner C

D) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 ft.

E) All wire shall be stretched by using a stretching device before it is attached to the corner posts.

Please see the attached location diagram for additional details.

All pits will be fenced according to the following minimum standards:

A) Thirty nine inch net wire shall be used with at least one strand of wire on top of the net wire.

10. Plans for restoration of the surface

Prior to construction of the location, the top 6 inches of soil material will be stripped off the location and the pit area. The topsoil removed and piled will amount to approximately 1,840 cubic yards of material. Topsoil will be stockpiled in one distinct pile. Placement of the topsoil is noted on the attached location plat. The topsoil pile from the location will be seeded as soon as the soil is stock piled with the seed mix listed. When all drilling and completion activities have been completed and the pit back-filled the topsoil from the pit area will be

spread on the pit area. The pit area will be seeded when the soil has been spread. The unused portion of the location (the area outside the dead men) will be re-contoured.

The dirt contractor will be provided with an approved copy of the surface use plan prior to construction activities.

Changes to the drainage during the construction activities shall be restored to its original line of flow or as near as possible when the pit is back-filled

All disturbed areas will be re-contoured to the approximate natural contours. Prior to back filling the pit the fences around the reserve pit will be removed.

The reserve pit will be reclaimed within 90 days of well completion. If the reserve pit has not dried sufficiently to allow back filling, an extension on the time requirement for back filling the pit will be requested. Once reclamation activities have begun, they shall be completed within 30 days.

After the reserve pit has been reclaimed, no depressions in the soil covering the reserve pit will be allowed. The objective is to keep seasonal rainfall and run off from seeping into the soil used to cover the reserve pit. Diversion ditches and water bars will be used to divert the run off as needed.

When restoration activities have been completed, the location site and new access road cuts and

shoulders shall be reseeded. Prior to reseeding, all disturbed areas will be scarified and left with a rough surface.

A) Seeding dates:

Seed will be spread when topsoil is stock piled and when reclamation work is performed.

The seed mix and quantity list will be used whether the seed is broadcast or drilled.

B) Seed Mix

To be determined by the Authorized Officer.

11. Surface ownership:

Access road	State
Location	State
Pipeline	State

12. Other information:

A) Vegetation

The vegetation coverage is Slight. The majority of the existing vegetation consists of non-native species. Rabbit brush, bitter brush, and Indian Rice grass and Sagebrush are also found on the location.

B) Dwellings:

There are no dwelling or other facilities within a one-mile radius of the location.

C) Archeology:

The location has been surveyed. A copy of that survey will be forwarded to your office.

If, during operations, any archaeological or historical sites, or any objects of antiquity (subject to the antiquities act of June 8, 1906) are discovered, all operations, which would affect such sites, will be suspended and the discovery reported promptly to the surface management agency.

D) Water:

The nearest water is the Willow Creek located 2 miles to the southwest.

E) Chemicals:

No pesticides, herbicides or other possible hazardous chemicals will be used without prior application.

F) Notification:

- a) Location Construction
At least forty eight (48) hours prior to construction of location and access roads.
- b) Location completion
Prior to moving on the drilling rig.
- c) Spud notice
At least twenty-four (24) hours prior to spudding the well.
- d) Casing string and cementing

At least twenty-four (24) hours prior to running casing and cementing all casing strings.

- e) BOP and related equipment tests
At least twenty-four (24) hours prior to initial pressure tests.

- f) First production notice
Within five (5) business days after the new well begins, or production resumes after well has been off production for more than 90 days.

G) Flare pit:

The flare pit will be located in **corner C** of the reserve pit outside the pit fences and 100 feet from the bore hole on the east side of the location. All fluids will be removed from the pit within 48 hours of occurrence.

13. Lessees or Operator's representative and certification

A) Representative

William A. Ryan
Rocky Mountain Consulting
290 S 800 E
Vernal, UT 84078

Office 435-789-0968
Fax 435-789-0970
Cellular 435-828-0968

All lease and/or unit operations will be conducted in such a


manner that full compliance is made with all applicable laws, regulations, onshore oil and gas orders, and any applicable notices to lessees. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance.

This drilling permit will be valid for a period of one year from the date of approval. After permit termination, a new application will be filed for approval for any future operations.

B) Certification:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill-site and access route that I am familiar with the conditions which presently exist, that the statements made in this plan are, to the best of my knowledge and belief, true and correct, and that the work associated with the operation proposed herein will be performed by The Houston Exploration Company and its contractors and subcontractors in conformity with this plan and terms and conditions with this plan and the terms and conditions under which it is approved.

Date 9/6/05



William A. Ryan, Agent
Rocky Mountain Consulting

Onsite Dates:

Statement of use of Hazardous Materials

No chemical(s) from the EPA's consolidated list of Chemicals subject to Reporting under Title III of the Superfund Amendments and Reauthorization, Act (SARA) of 1986 will be used, produced, transported, stored, disposed, or associated with the proposed action. No extremely hazardous substances, as defined in 40 cfr 355, will be used, produced, stored, transported, disposed, or associated with the proposed action.

If you require additional information please contact:

William A Ryan
Agent for The Houston Exploration Company
Rocky Mountain Consulting
290 S 800 E
Vernal, UT 84078

435-789-0968 Office
435-828-0968 Cell
435-789-0970 Fax

THE HOUSTON EXPLORATION COMPANY

BUCK CANYON #13-16-12-21

LOCATED IN UINTAH COUNTY, UTAH
SECTION 16, T12S, R21E, S.L.B.&M.



PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: SOUTHWESTERLY



U
E
L
S Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

08 19 05
MONTH DAY YEAR

PHOTO

TAKEN BY: B.H.

DRAWN BY: C.P.

REVISED: 00-00-00

- Since 1964 -


THE HOUSTON EXPLORATION COMPANY

FIGURE #1

LOCATION LAYOUT FOR

BUCK CANYON #13-16-12-21
SECTION 16, T12S, R21E, S.L.B.&M.
639' FSL 856' FWL

SCALE: 1" = 50'
DATE: 08-23-05
Drawn By: P.M.

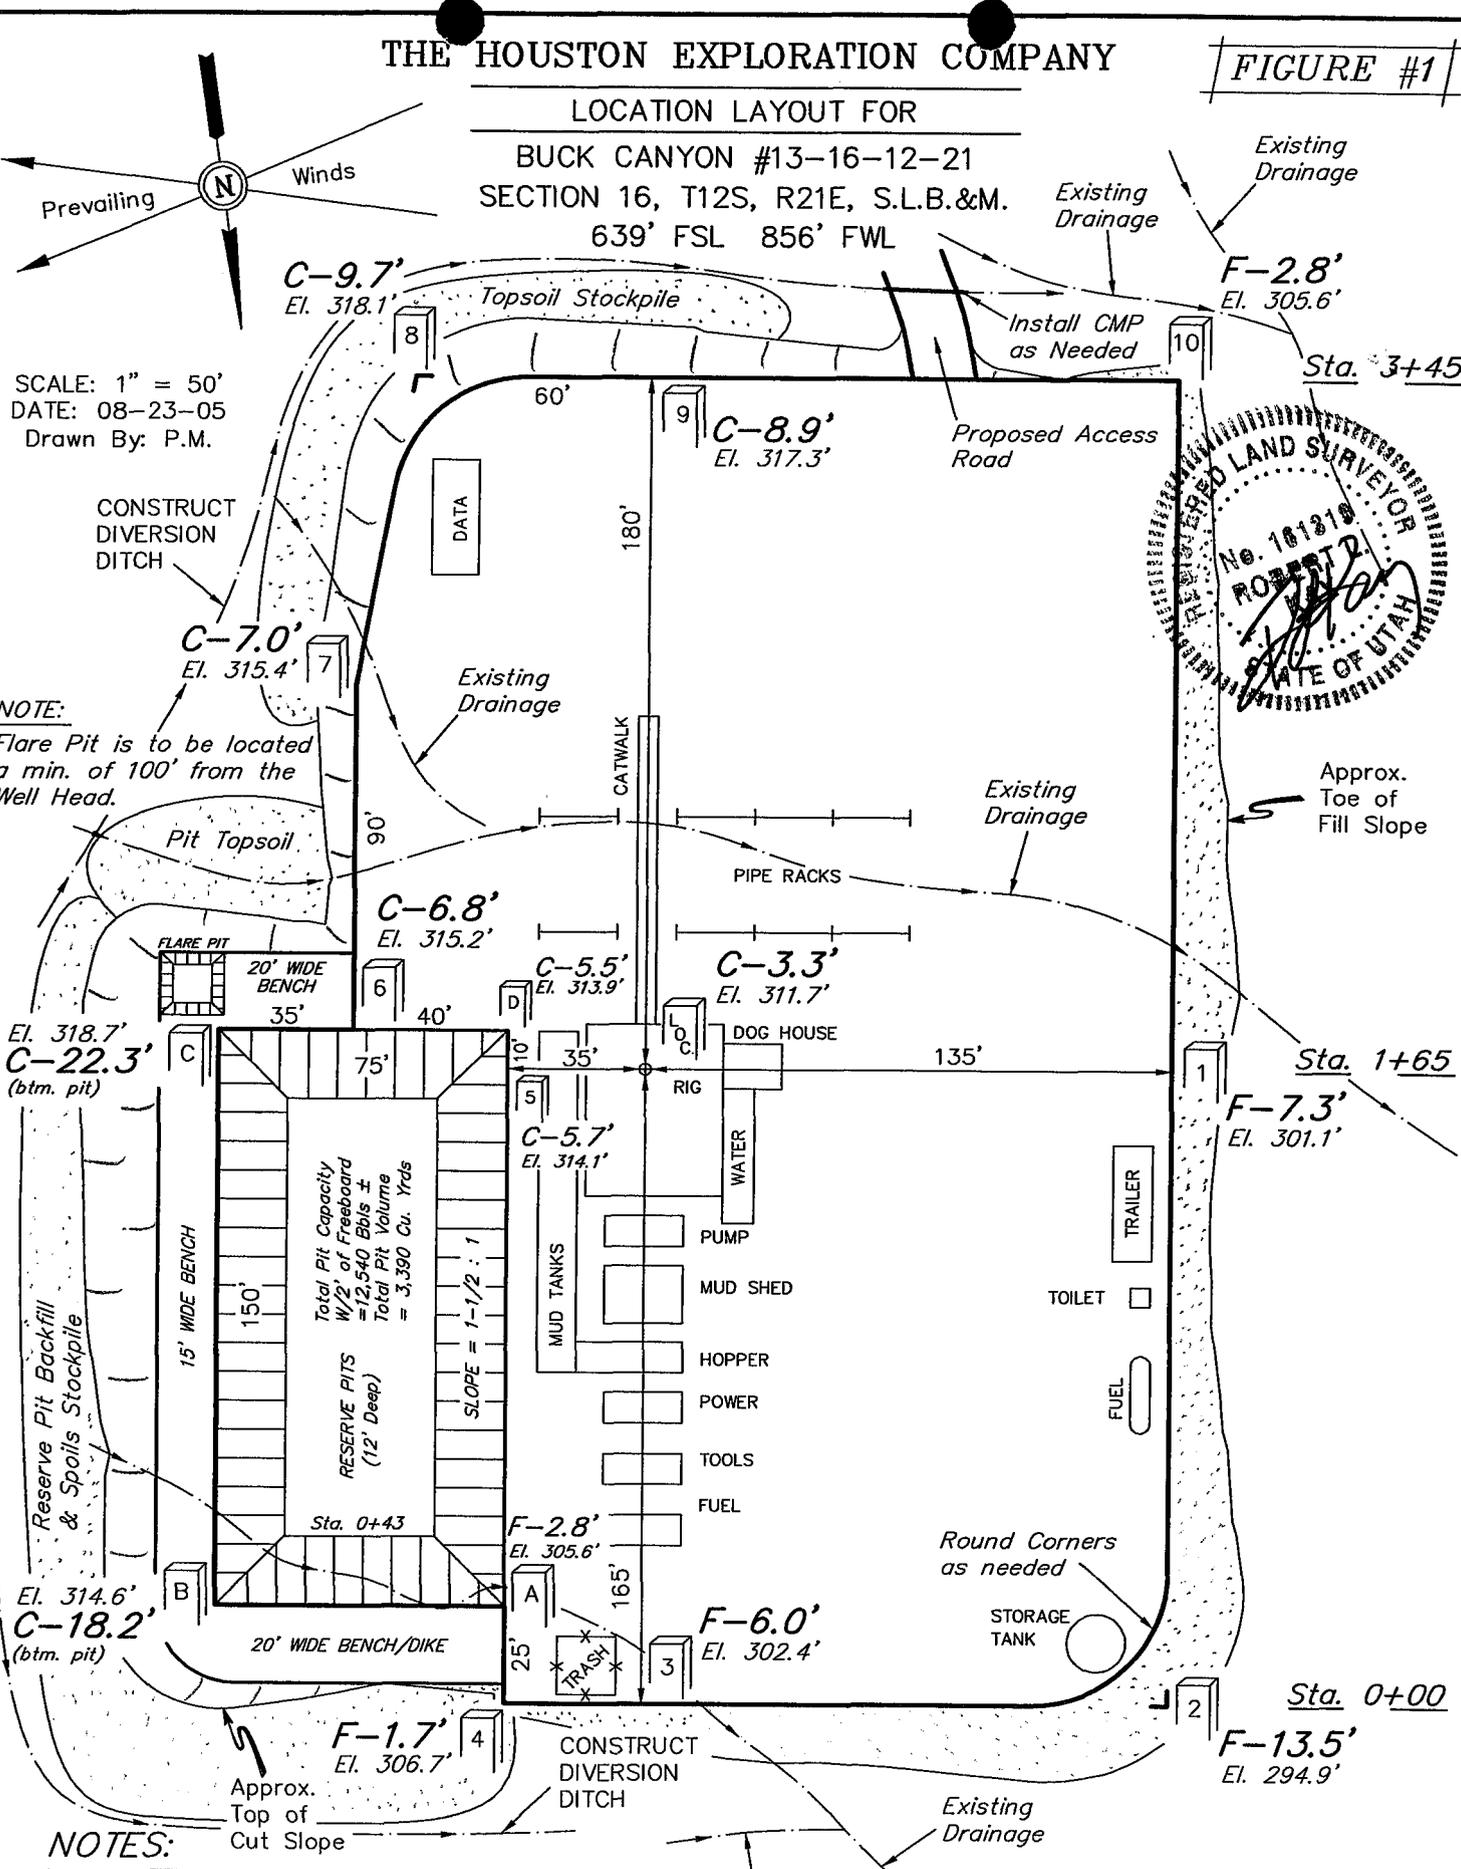

NOTE:
Flare Pit is to be located
a min. of 100' from the
Well Head.



NOTES:

Elev. Ungraded Ground At Loc. Stake = 6311.7'
FINISHED GRADE ELEV. AT LOC. STAKE = 6308.4'

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

THE HOUSTON EXPLORATION COMPANY


FIGURE #2

TYPICAL CROSS SECTIONS FOR
 BUCK CANYON #13-16-12-21
 SECTION 16, T12S, R21E, S.L.B.&M.
 639' FSL 856' FWL



1" = 20'
 X-Section Scale
 1" = 50'

DATE: 08-23-05
 Drawn By: P.M.

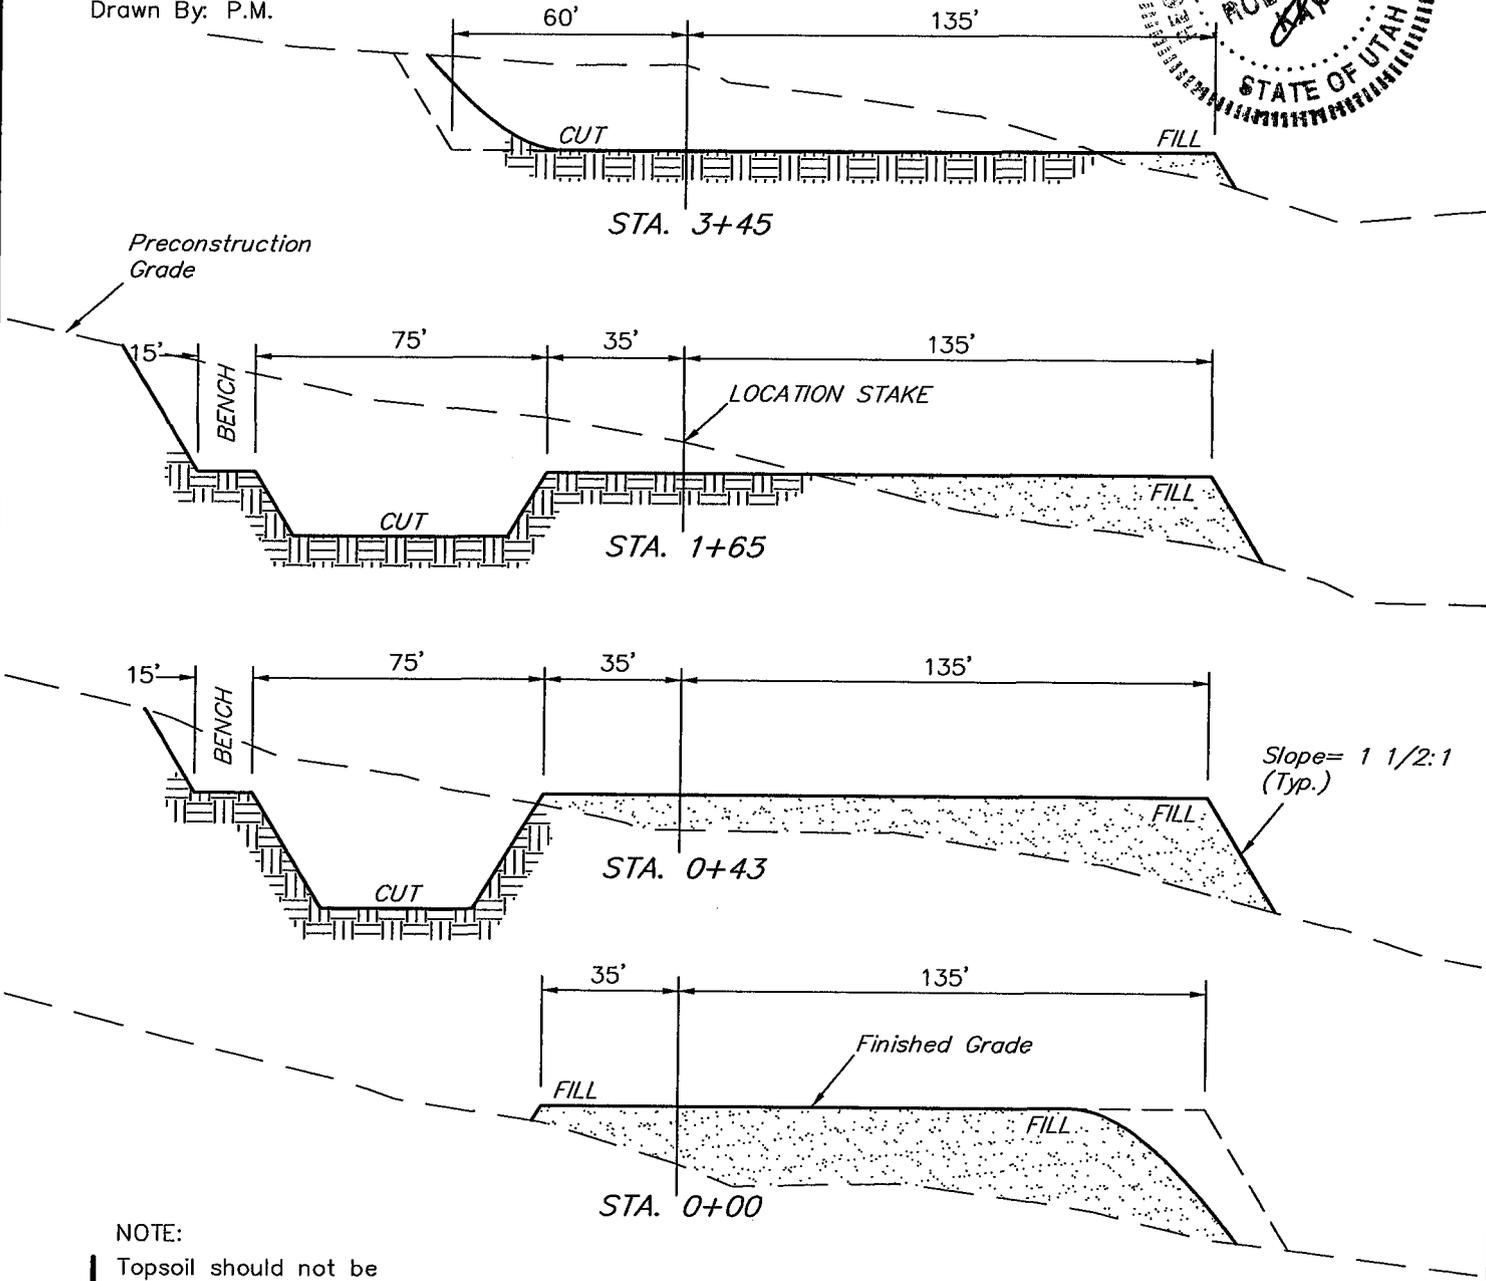

NOTE:


Topsoil should not be Stripped Below Finished Grade on Substructure Area.

* NOTE:
 FILL QUANTITY INCLUDES
 5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,840 Cu. Yds.
Remaining Location	= 10,300 Cu. Yds.
TOTAL CUT	= 12,140 CU.YDS.
FILL	= 8,610 CU.YDS.

EXCESS MATERIAL	= 3,530 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,530 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.

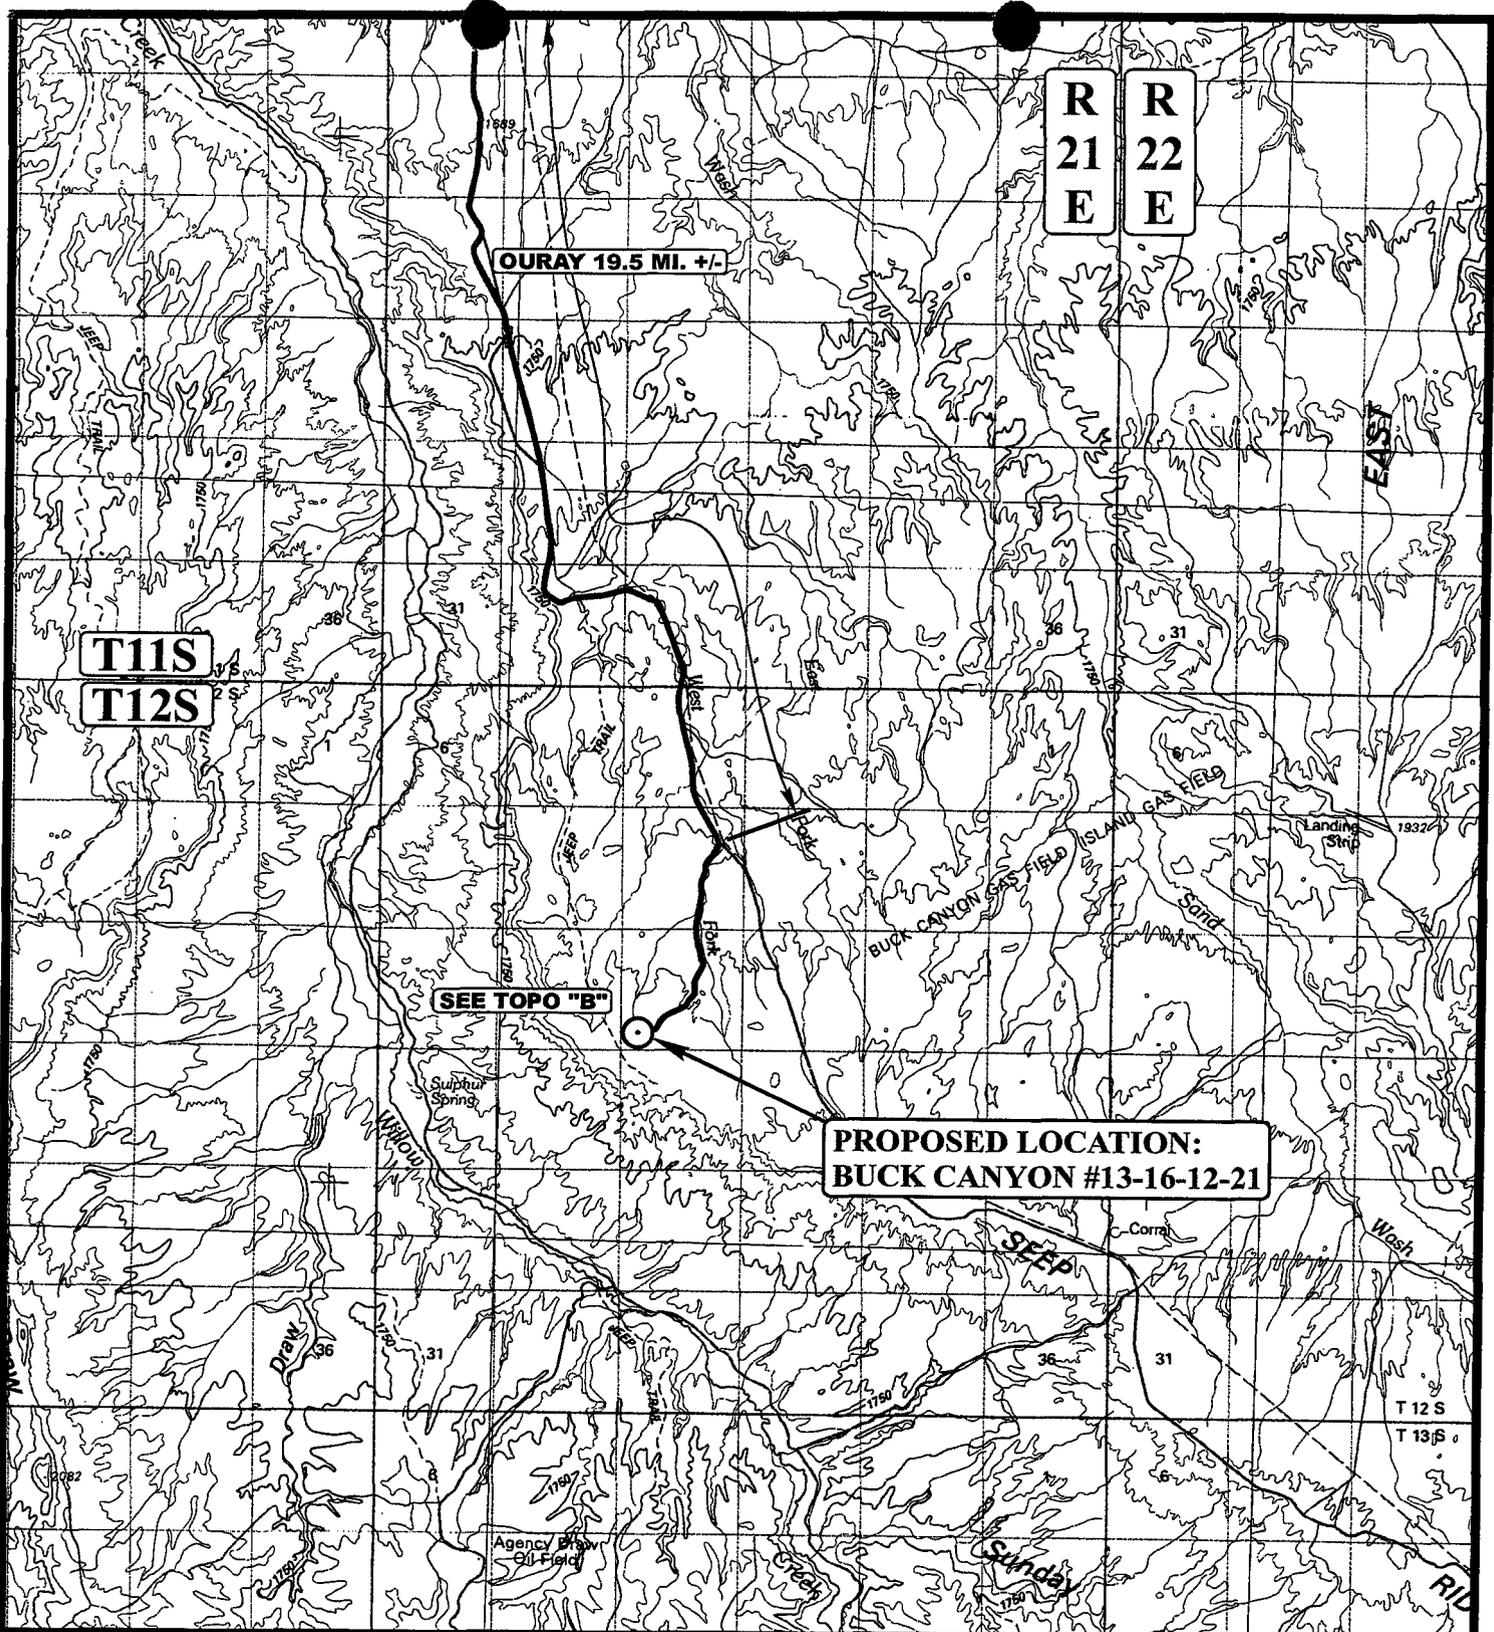

LEGEND:

⊙ PROPOSED LOCATION



THE HOUSTON EXPLORATION COMPANY

BUCK CANYON #13-16-12-21
SECTION 16, T12S, R21E, S.L.B.&M.
639' FSL 856' FWL




Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC 08 19 05
MAP MONTH DAY YEAR

SCALE: 1:100,000 DRAWN BY: C.P. REVISED: 00-00-00



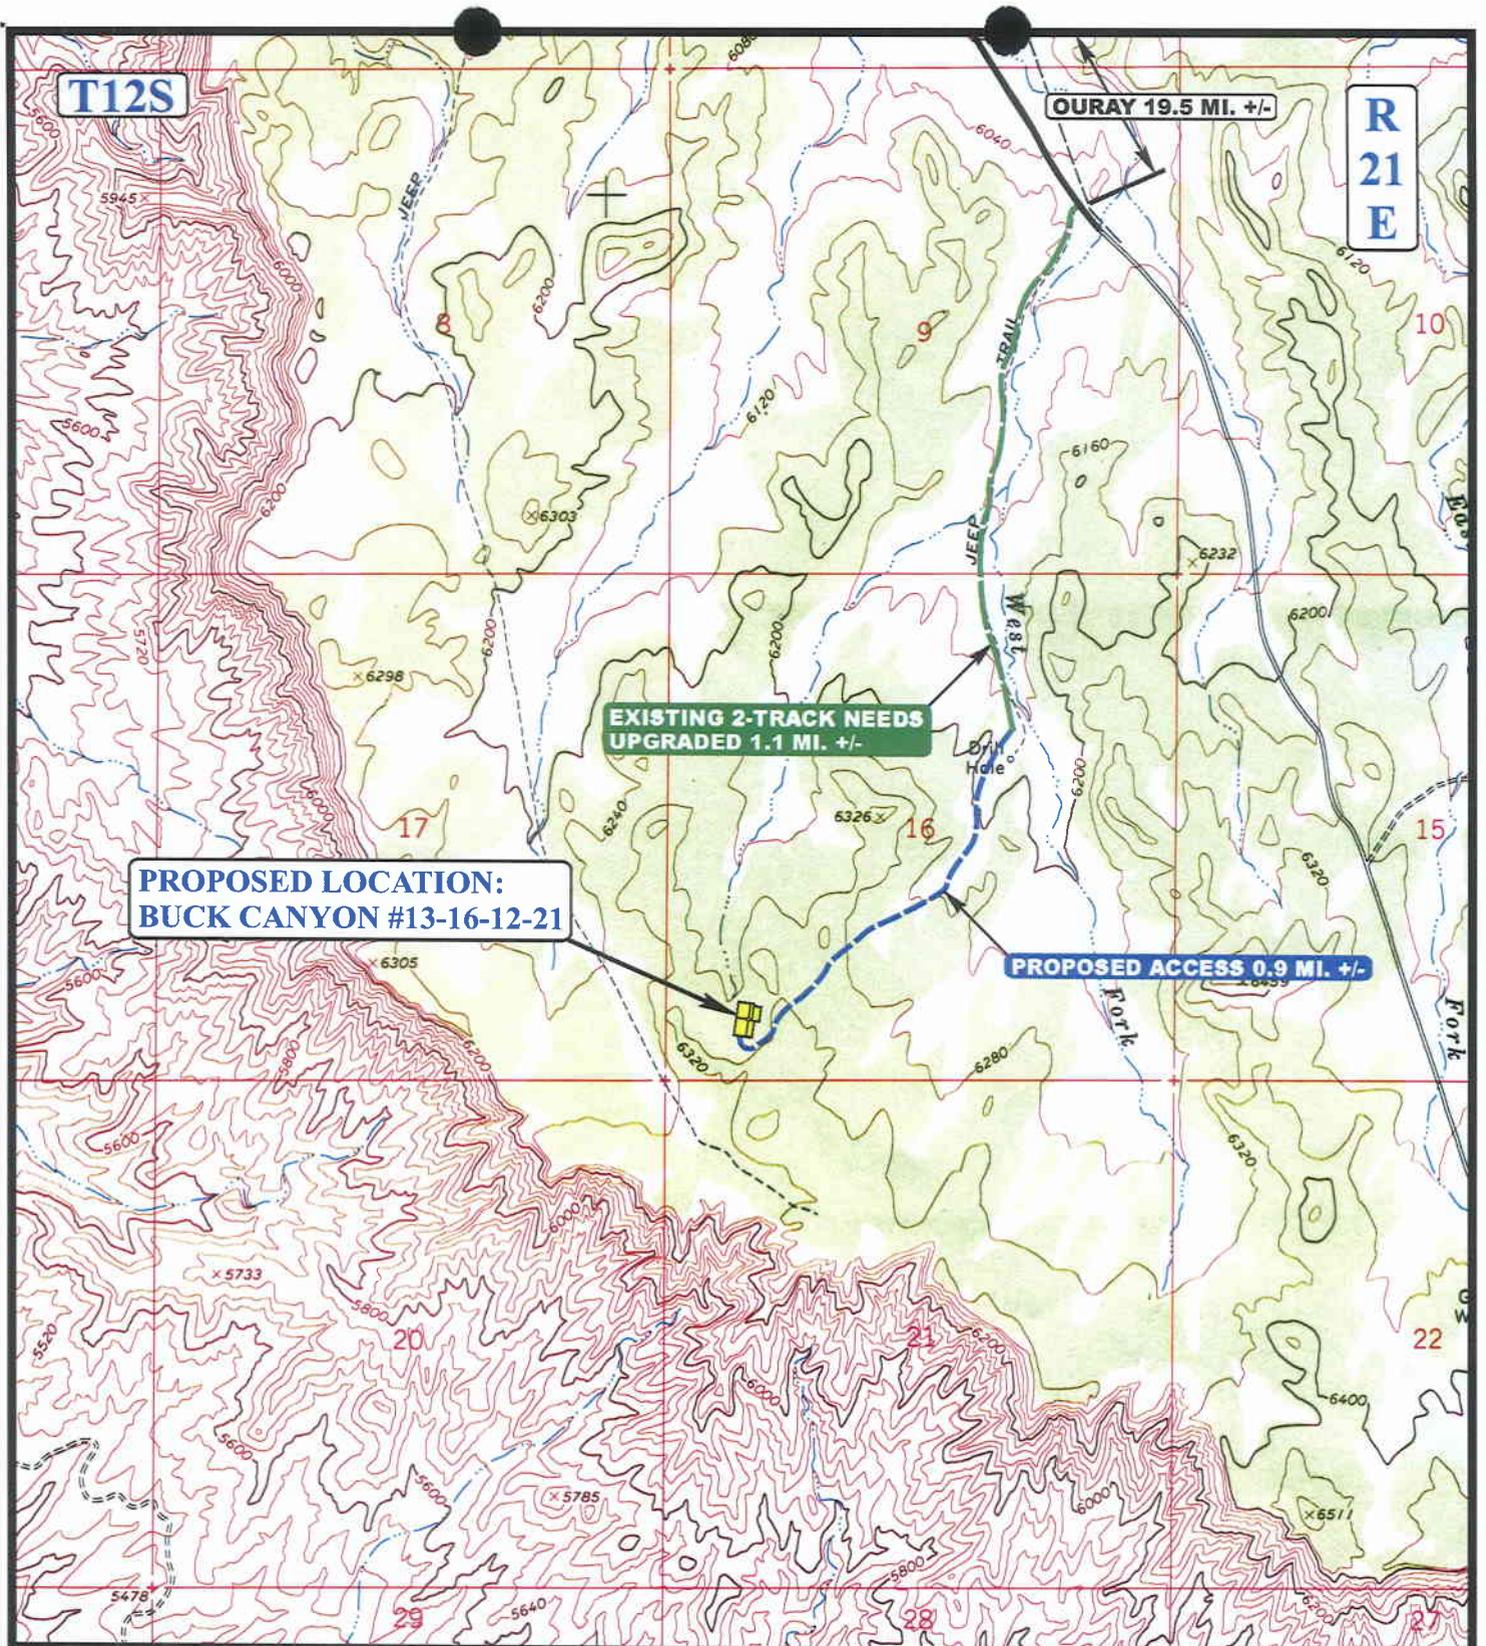

LEGEND:

-  EXISTING ROAD
-  PROPOSED ACCESS ROAD
-  EXISTING 2-TRACK NEEDS UPGRADED

THE HOUSTON EXPLORATION COMPANY

BUCK CANYON #13-16-12-21
SECTION 16, T12S, R21E, S.L.B.&M.
639' FSL 856' FWL




Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC MAP **08 19 05**
 MONTH DAY YEAR
 SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00



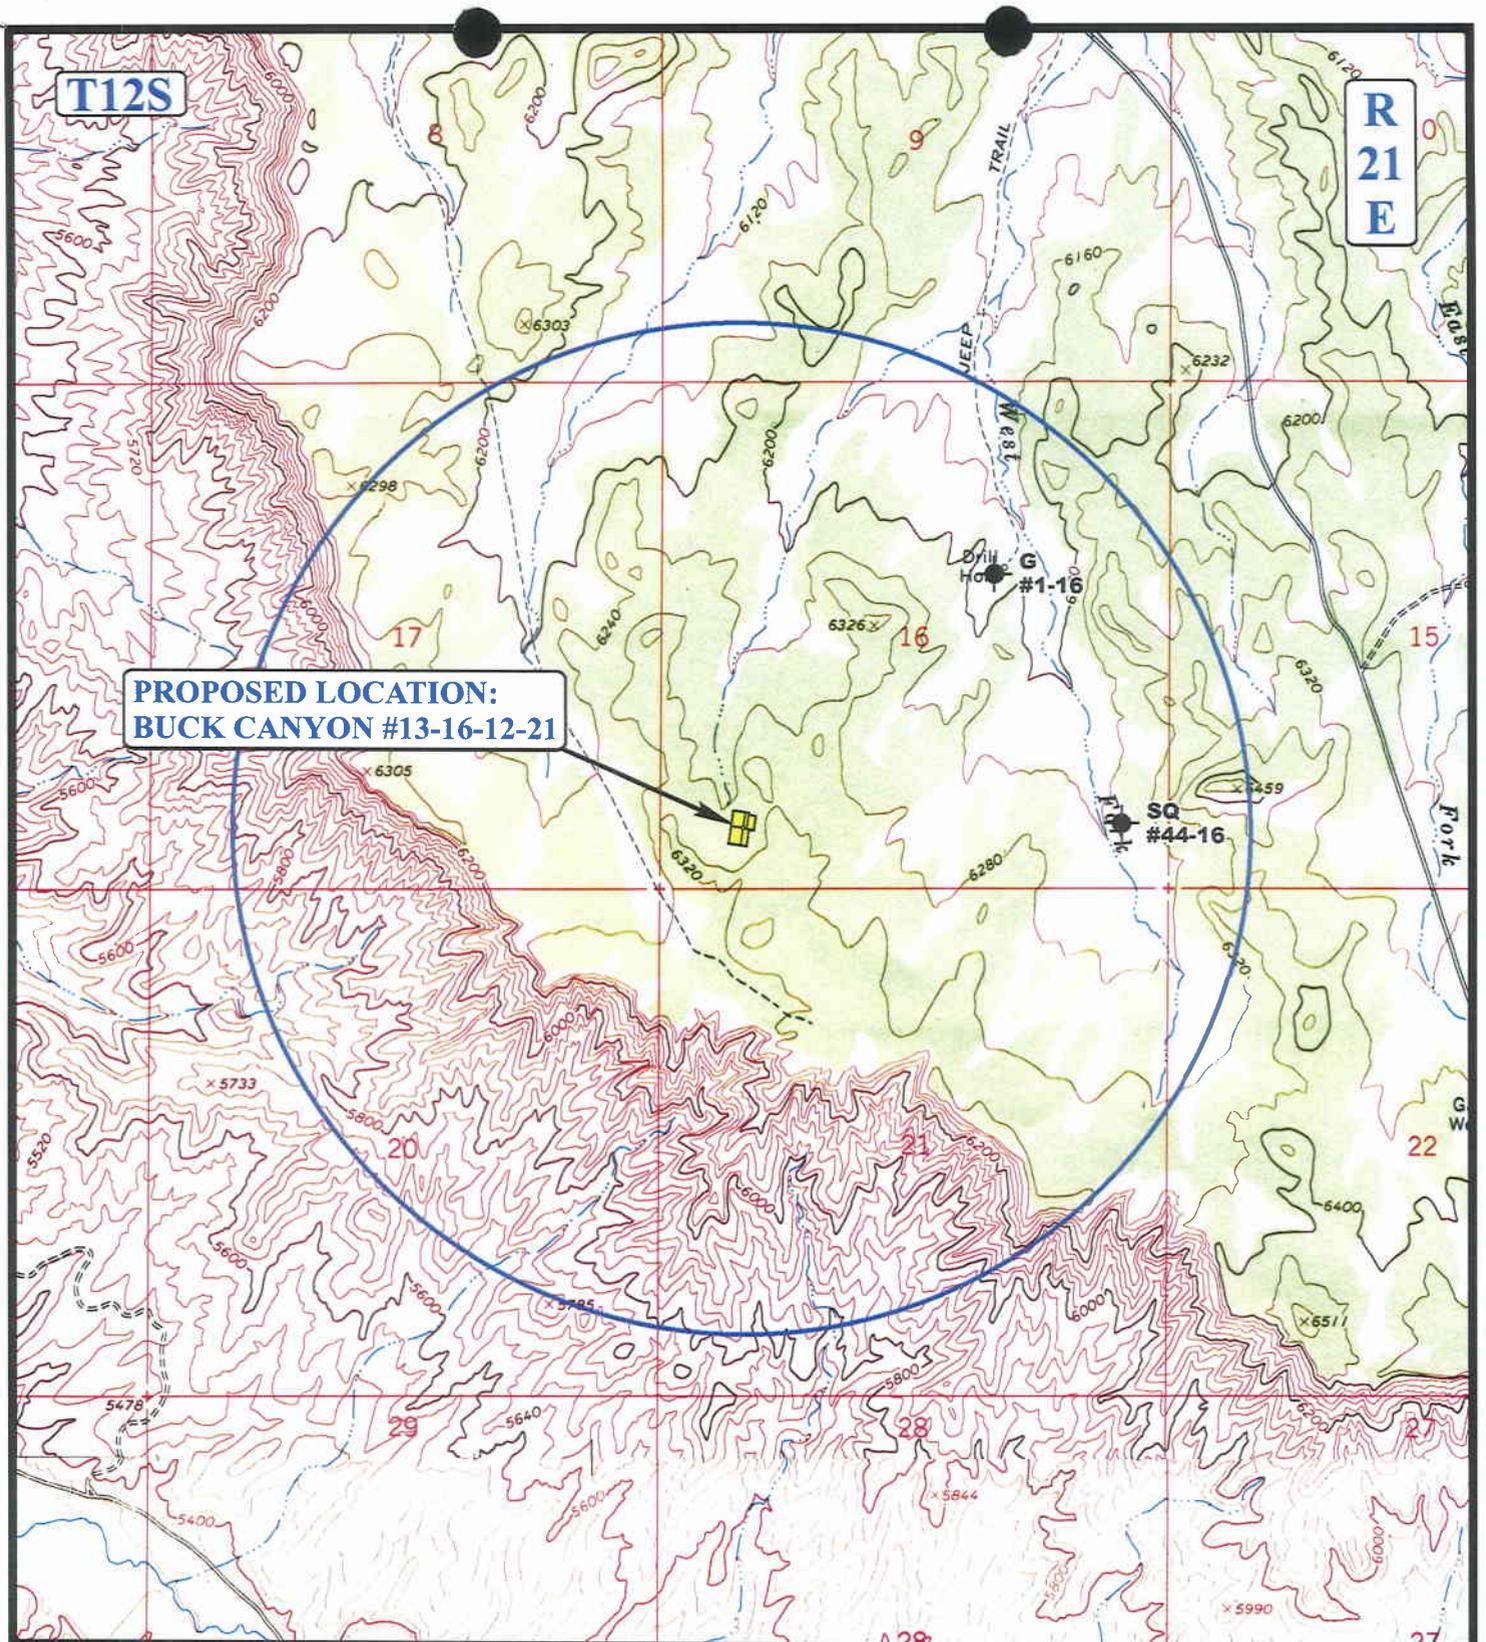

**PROPOSED LOCATION:
BUCK CANYON #13-16-12-21**

LEGEND:

- | | |
|-------------------|-------------------------|
| ⊗ DISPOSAL WELLS | ⊗ WATER WELLS |
| ● PRODUCING WELLS | ⊖ ABANDONED WELLS |
| ⊖ SHUT IN WELLS | ⊖ TEMPORARILY ABANDONED |


THE HOUSTON EXPLORATION COMPANY

**BUCK CANYON #13-16-12-21
SECTION 16, T12S, R21E, S.L.B.&M.
639' FSL 856' FWL**

U&L S Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP 08 19 05
MONTH DAY YEAR
SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00 **C TOPO**



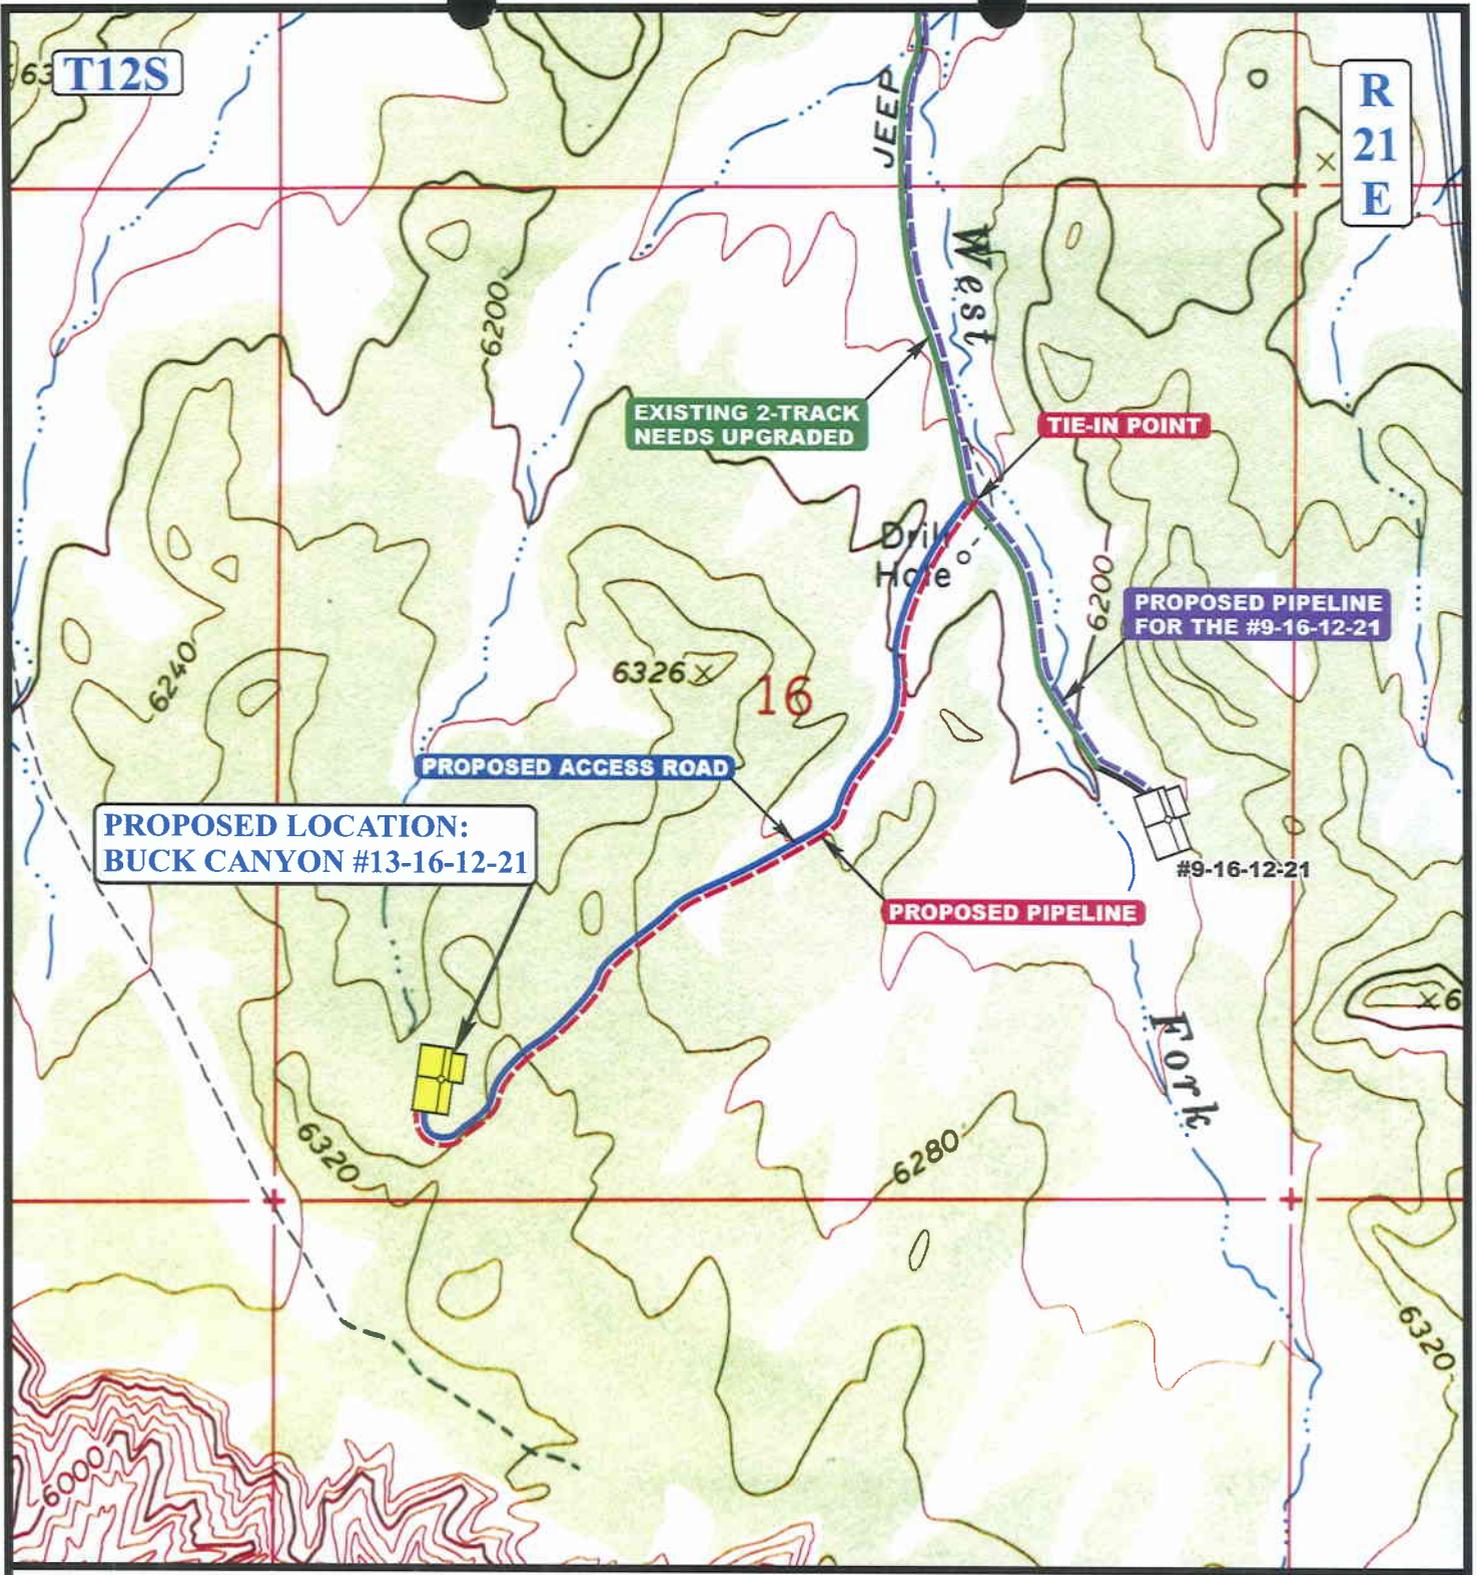

APPROXIMATE TOTAL PIPELINE DISTANCE = 4,851' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING 2-TRACK NEEDS UPGRADED
- - - - - PROPOSED PIPELINE
- - - - - PROPOSED PIPELINE (SERVICING OTHER WELLS)

THE HOUSTON EXPLORATION COMPANY

BUCK CANYON #13-16-12-21
SECTION 16, T12S, R21E, S.L.B.&M.
639' FSL 856' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC 08 19 05
MAP MONTH DAY YEAR
 SCALE: 1" = 1000' DRAWN BY: C.P. REVISED: 00-00-00



TYPICAL
GAS WELL

WATER DRAIN
PIT

water dump line

WELL HEAD

valve

valve

COMBINATION
UNIT


Valve & check

valve

TO GAS SALES

44
D
A
T
E
S
E
D

valve & check

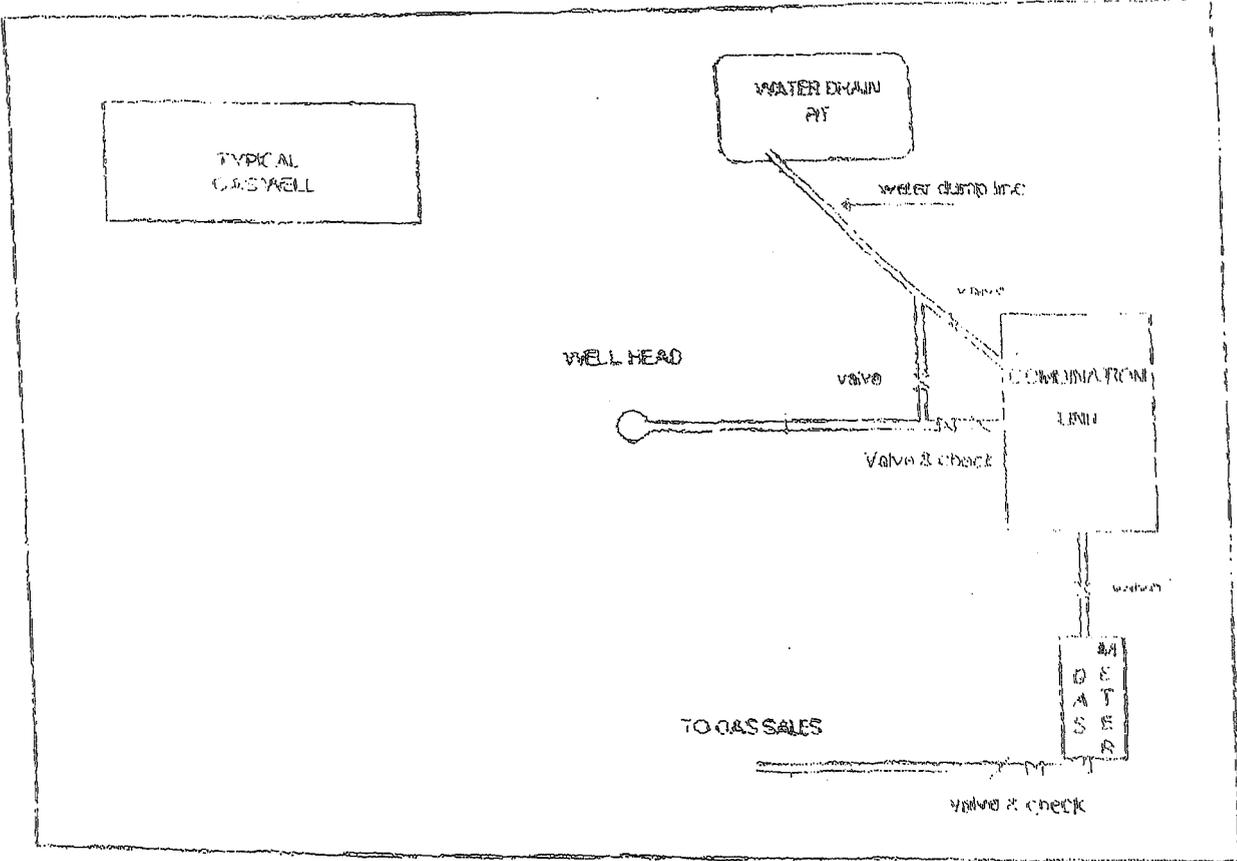

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 09/09/2005

API NO. ASSIGNED: 43-047-37118

WELL NAME: BUCK CYN 13-16-12-21

OPERATOR: Enduring Res. LLC (N2750)

CONTACT: BILL RYAN

PHONE NUMBER: 435-789-0968

PROPOSED LOCATION:

SWSW 16 120S 210E

SURFACE: 0639 FSL 0856 FWL

BOTTOM: 0639 FSL 0856 FWL

UINTAH

UNDESIGNATED (2)

LEASE TYPE: 3 - State

LEASE NUMBER: ML-47085

SURFACE OWNER: 3 - State

PROPOSED FORMATION: MNCS

COALBED METHANE WELL? NO

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering	DKD	10/4/05
Geology		
Surface		

LATITUDE: 39.76808

LONGITUDE: -109.5779

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[] Ind[] Sta[] Fee[]
(No. 104155044)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. T75377)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)

LOCATION AND SITING:

- ___ R649-2-3.
- Unit _____
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- ___ R649-3-3. Exception
- ___ Drilling Unit
Board Cause No: _____
Eff Date: _____
Siting: _____
- ___ R649-3-11. Directional Drill

COMMENTS:

Needs Permit (09-20-05)

STIPULATIONS:

- 1- Spacing Strip
- 2- STATEMENT OF BASIS
- 3- Cont st. p #3 (4 1/2" production, 2500' md)

T12S R21E

FED Q 22-9

COTTONWOOD
122-911

COTTONWOOD
WASH LINE 41

COTTONWOOD
122-10M

BUCK CANYON FIELD

GOVERNMENT
1-46

GOVERNMENT
1-45

BUCK CYN
11-16-12-21

BUCK CYN
9-16-12-21

BUCK CYN
13-16-12-21

BUCK CYN
15-16-12-21

STATE Q
4-16

FEDERAL 2-22

GOVERNMENT
1-22
GRAY KNOLL
FED 1

OPERATOR: THE HOUSTON EXPL CO (N2525)

SEC: 16 T. 12S R. 21E

FIELD: UNDESIGNATED (002)

COUNTY: UINTAH


SPACING: R649-3-2 / GENERAL SITING

Field Status	
	ABANDONED
	ACTIVE
	COMBINED
	INACTIVE
	PROPOSED
	STORAGE
	TERMINATED

Unit Status	
	EXPLORATORY
	GAS STORAGE
	NF PP OIL
	NF SECONDARY
	PENDING
	PI OIL
	PP GAS
	PP GEOTHERML
	PP OIL
	SECONDARY
	TERMINATED

Wells Status

- GAS INJECTION
- GAS STORAGE
- LOCATION ABANDONED
- NEW LOCATION
- PLUGGED & ABANDONED
- PRODUCING GAS
- PRODUCING OIL
- SHUT-IN GAS
- SHUT-IN OIL
- TEMP. ABANDONED
- TEST WELL
- WATER INJECTION
- WATER SUPPLY
- WATER DISPOSAL
- DRILLING



Utah Oil Gas and Mining



PREPARED BY: DIANA WHITNEY
DATE: 09-SEPTEMBER-2005

**DIVISION OF OIL, GAS AND MINING
APPLICATION FOR PERMIT TO DRILL
STATEMENT OF BASIS**

OPERATOR: THE HOUSTON EXPLORATION COMPANY
WELL NAME & NUMBER: BUCK CANYON 13-16-12-21
API NUMBER: 43-047-37118
LOCATION: 1/4,1/4 SWSW Sec: 16 TWP: 12S RNG: 21E 639' FSL 856' FWL

Geology/Ground Water:

Houston proposes to set 2,000' of surface casing at this location. The depth to the base of the moderately saline water at this location is estimated to be at a depth of 3,300'. A search of Division of Water Rights records shows no water wells within a 10,000 foot radius of the proposed location. The surface formation at this site is the Green River Formation. This area is a recharge area for Green River Formation aquifers. The Green River Formation is made up of interbedded limestones, shales and sandstones. The proposed casing and cementing program should adequately protect the aquifer and any underground sources of useable water.

Reviewer: Brad Hill **Date:** 09-21-05

Surface:

The pre-site investigation of the surface was performed on 9/20/05. This site is on state surface, with state minerals. Ed Bonner of SITLA was invited to attend this inspection but was not present. Ben Williams of DWR stated that this site is high value deer and elk winter range and a nesting area for Ferruginous Hawk. Mr. Williams requested that this site be closed to drilling from Nov 1 to April 15 for deer and elk considerations and also closed from March 1 to July 15 for the Ferruginous Hawk.

Reviewer: Richard Powell **Date:** 9/20/2005

Conditions of Approval/Application for Permit to Drill:

1. A synthetic liner with a minimum thickness of 12 mils with a felt subliner shall be properly installed and maintained in the reserve pit.

ON-SITE PREDRILL EVALUATION
Division of Oil, Gas and Mining

OPERATOR: THE HOUSTON EXPLORATION COMPANY

WELL NAME & NUMBER: BUCK CANYON 13-16-12-21

API NUMBER: 43-047-37118

LEASE: ML-47085 FIELD/UNIT: UNDESIGNATED

LOCATION: 1/4,1/4 SW/SW Sec: 16 TWP: 12S RNG: 21E 639' FSL 856' FWL

LEGAL WELL SITING: 460 F SEC. LINE; 460 F 1/4,1/4 LINE; 920 F ANOTHER WELL.

GPS COORD (UTM): 4402775 12S0621805 SURFACE OWNER: STATE.

PARTICIPANTS

Richard Powell (DOGM), Doug Hammond (Enduring Resources), Mike Stewart (Ponderosa Oilfield Service), Ben Williams (DWR), Ginger Stringham (Houston Exploration).

REGIONAL/LOCAL SETTING & TOPOGRAPHY

Location is set at the base of a small ridge, which slopes to the northwest. There are visible rock ledges protruding from the sides of the ridge. Scattered ridges and shallow drainages dominate the topography, but the deep Willow Creek Canyon drainage lies approximately .3 miles to the south. Ouray, UT is approximately 19.5 miles to the north.

SURFACE USE PLAN

CURRENT SURFACE USE: Livestock and Wildlife Grazing.

PROPOSED SURFACE DISTURBANCE: Location will be 345' by 245'. Proposed new access road to be approximately 0.9miles. Existing two-track road to be upgraded for approximately 1.1 miles.

LOCATION OF EXISTING WELLS WITHIN A 1-MILE RADIUS: See attached map from GIS database.

LOCATION OF PRODUCTION FACILITIES AND PIPELINES: All production facilities will be on location and added after drilling well. Pipeline will follow access road.

SOURCE OF CONSTRUCTION MATERIAL: All construction material will be borrowed from site during construction of location.

ANCILLARY FACILITIES: None will be required.

WILL DRILLING AT THIS LOCATION GENERATE PUBLIC INTEREST OF CONCERNS? (EXPLAIN): Unlikely.

WASTE MANAGEMENT PLAN:

Drilled cuttings will be settled into reserve pit. Liquids from pit will be allowed to evaporate. Formation water will be confined to storage

tanks. Portable toilets, sewage holding tanks, and onsite sewage treatment equipment will be handled by commercial contractors and regulated by the appropriate health authority. Trash will be contained in trash baskets and disposed of at an approved landfill.

ENVIRONMENTAL PARAMETERS

AFFECTED FLOODPLAINS AND/OR WETLANDS: none

FLORA/FAUNA: Pinyon pine, Juniper, Sagebrush, Greasewood, Prickly Pear, and Cheat grass / Deer, Elk, Rodents, Raptors, Coyote, Songbirds, Rabbit, Bobcat, Pronghorn.

SOIL TYPE AND CHARACTERISTICS: Light brown sandy clay. The surface is scattered with fractured shale, and rock outcroppings are visible along the slopes.

EROSION/SEDIMENTATION/STABILITY: Very little natural erosion. Sedimentation and stability are not a problem and location construction shouldn't cause an increase in stability or erosion problems.

PALEONTOLOGICAL POTENTIAL: None observed.

RESERVE PIT

CHARACTERISTICS: 150' BY 75' and twelve feet deep.

LINER REQUIREMENTS (Site Ranking Form attached): A liner and felt sub-liner will be required for reserve pit. Site ranking score is 30.

SURFACE RESTORATION/RECLAMATION PLAN:

Will be per SITLA.

SURFACE AGREEMENT: As per SITLA.

CULTURAL RESOURCES/ARCHAEOLOGY: Center stake was marked by "Sagebrush" 9/14/05.

OTHER OBSERVATIONS/COMMENTS

ATTACHMENTS

Photos of this site were taken and placed on file.

RICHARD POWELL
DOGM REPRESENTATIVE

9/20/05 12:00 PM
DATE/TIME

**Evaluation Ranking Criteria and Ranking Score
For Reserve and Onsite Pit Liner Requirements**

<u>Site-Specific Factors</u>	<u>Ranking</u>	<u>Site Ranking</u>
Distance to Groundwater (feet)		
>200	0	
100 to 200	5	
75 to 100	10	
25 to 75	15	
<25 or recharge area	20	<u>5</u>
Distance to Surf. Water (feet)		
>1000	0	
300 to 1000	2	
200 to 300	10	
100 to 200	15	
< 100	20	<u>0</u>
Distance to Nearest Municipal Well (feet)		
>5280	0	
1320 to 5280	5	
500 to 1320	10	
<500	20	<u>0</u>
Distance to Other Wells (feet)		
>1320	0	
300 to 1320	10	
<300	20	<u>0</u>
Native Soil Type		
Low permeability	0	
Mod. permeability	10	
High permeability	20	<u>20</u>
Fluid Type		
Air/mist	0	
Fresh Water	5	
TDS >5000 and <10000	10	
TDS >10000 or Oil Base Mud Fluid	15	
containing significant levels of hazardous constituents	20	<u>5</u>
Drill Cuttings		
Normal Rock	0	
Salt or detrimental	10	<u>0</u>
Annual Precipitation (inches)		
<10	0	
10 to 20	5	
>20	10	<u>0</u>
Affected Populations		
<10	0	
10 to 30	6	
30 to 50	8	
>50	10	<u>0</u>
Presence of Nearby Utility Conduits		
Not Present	0	
Unknown	10	
Present	15	<u>0</u>


Final Score 30 (Level I Sensitivity)

Sensitivity Level I = 20 or more; total containment is required.
Sensitivity Level II = 15-19; lining is discretionary.
Sensitivity Level III = below 15; no specific lining is required.





10-05 Houston Buck Cyn 13-10-12-21
Casing Schematic

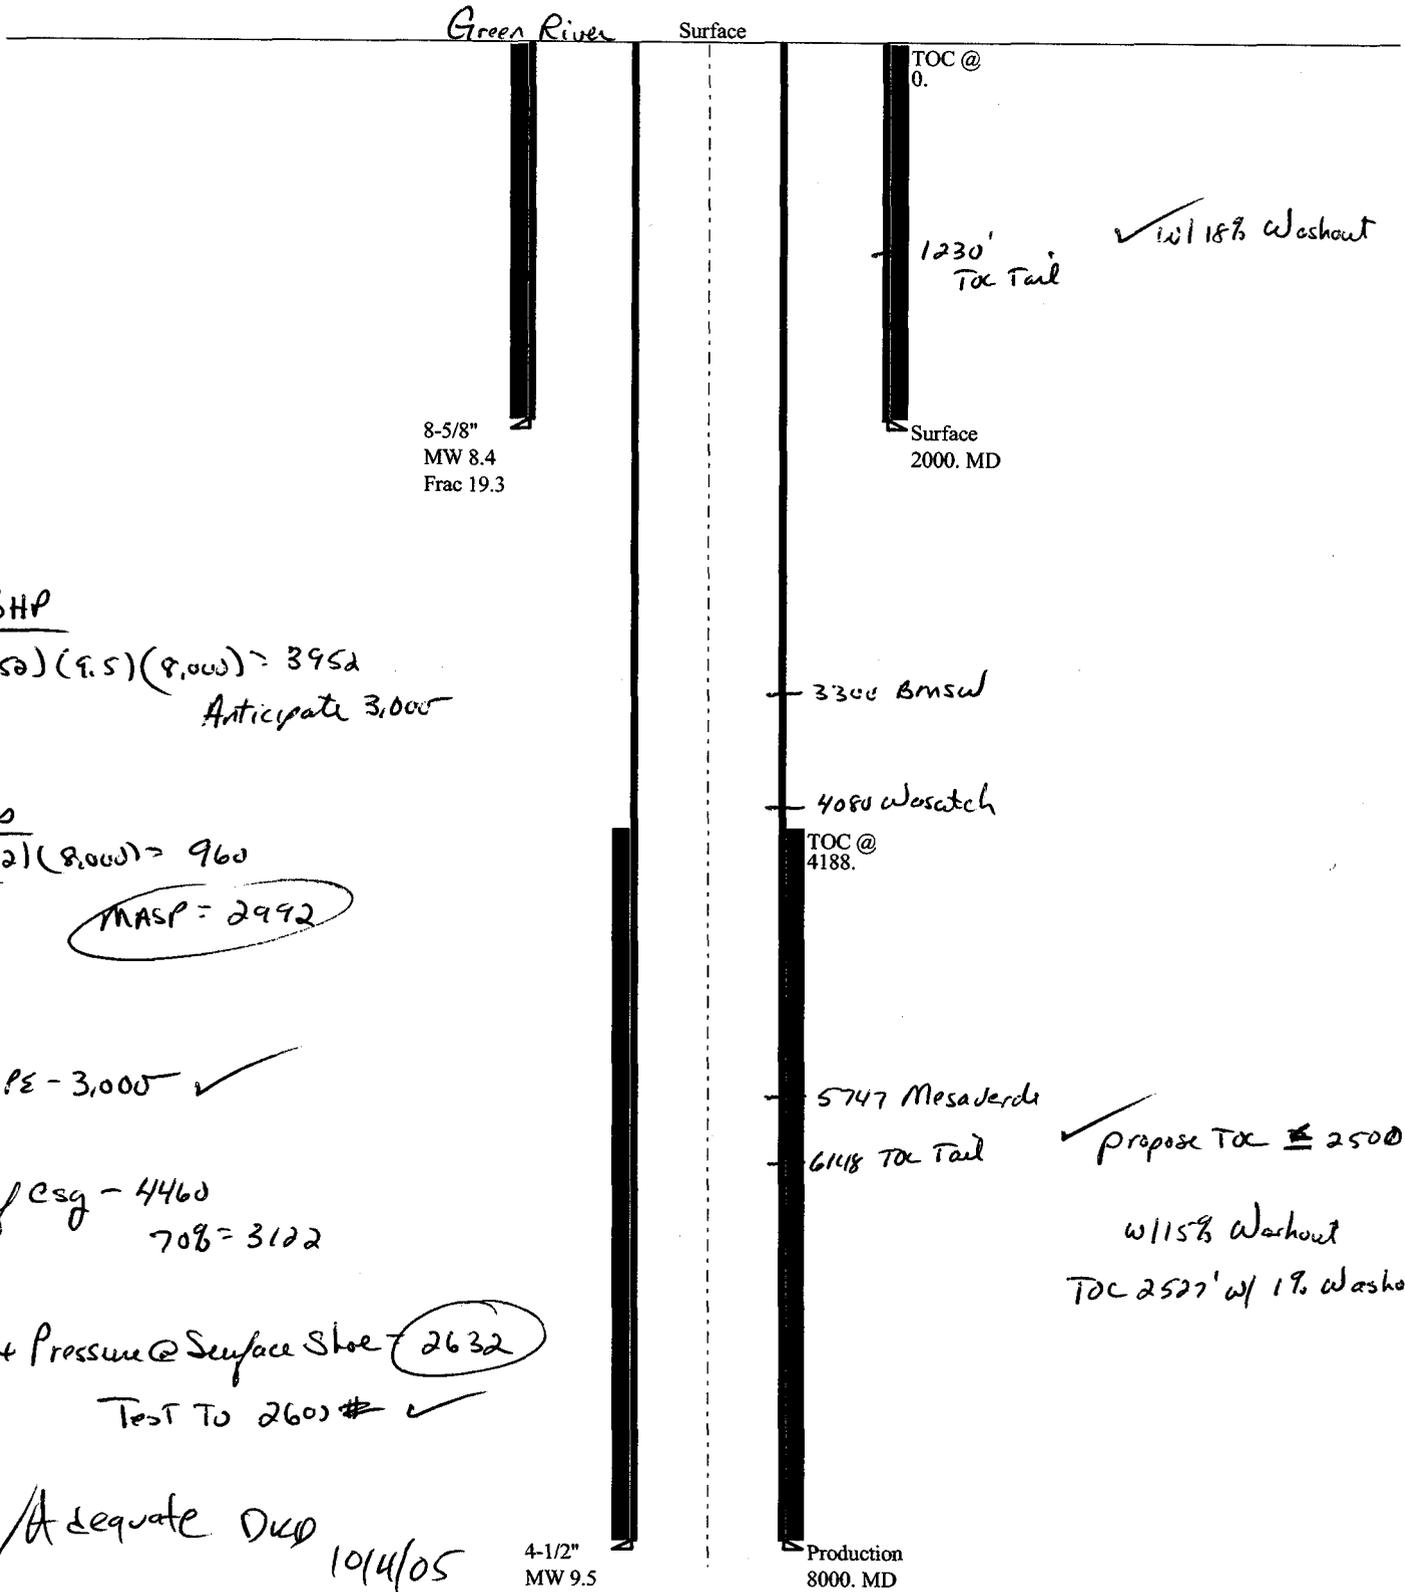

BHP
 $(1.05)(9.5)(8,000) = 3952$
 Anticipate 3,000

Gas
 $(.12)(8,000) = 960$
 MASP = 2992

BOPE - 3,000 ✓

Seal csg - 4460
 70% = 3122

Max Pressure @ Surface Shoe = 2632
 Test To 2600 # ✓

✓ Adequate DUD 10/4/05

TOC @ 0.
 1230' TOC Tail ✓ w/ 18% Washout
 Surface 2000. MD
 3300 Bmsw
 4080 Washout
 TOC @ 4188.
 5747 Mesa Jerdi
 6118 TOC Tail ✓ propose TOC ≤ 2500
 w/ 15% Washout
 TOC 2527' w/ 1% Washout
 Production 8000. MD

Well name:	10-05 Houston Buck Cyn 13-16-12-21	
Operator:	Houston Exploration Company	
String type:	Surface	Project ID: 43-047-37118
Location:	Uintah County, Utah	

Design parameters:

Collapse

Mud weight: 8.400 ppg
Design is based on evacuated pipe.

Burst

Max anticipated surface pressure: 457 psi
Internal gradient: 0.436 psi/ft
Calculated BHP: 1,330 psi

No backup mud specified.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Tension:

8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)

Tension is based on air weight.
Neutral point: 1,749 ft

Environment:

H2S considered? No
Surface temperature: 65 °F
Bottom hole temperature: 93 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 299 ft

Cement top: Surface

Non-directional string.

Re subsequent strings:

Next setting depth: 8,000 ft
Next mud weight: 9.500 ppg
Next setting BHP: 3,948 psi
Fracture mud wt: 19.250 ppg
Fracture depth: 2,000 ft
Injection pressure: 2,000 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	2000	8.625	36.00	J-55	ST&C	2000	2000	7.7	143.5

Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	873	3450	3.953	1330	4460	3.35	72	434	6.03 J

Prepared by: Clinton Dworshak
Utah Div. of Oil & Mining

Phone: (801) 538-5280
FAX: (801)359-3940

Date: October 3, 2005
Salt Lake City, Utah

ENGINEERING STIPULATIONS -

Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:	10-05 Houston Buck Cyn 13-16-12-21	
Operator:	Houston Exploration Company	
String type:	Production	Project ID: 43-047-37118
Location:	Uintah County, Utah	

Design parameters:

Collapse

Mud weight: 9.500 ppg
Design is based on evacuated pipe.

Burst

Max anticipated surface pressure: 457 psi
Internal gradient: 0.436 psi/ft
Calculated BHP: 3,948 psi

No backup mud specified.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Tension:

8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)

Tension is based on air weight.
Neutral point: 6,864 ft

Environment:

H2S considered? No
Surface temperature: 65 °F
Bottom hole temperature: 177 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 1,500 ft

Cement top: 4,189 ft

Non-directional string.

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	8000	4.5	11.60	N-80	LT&C	8000	8000	3.875	185.4
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	3948	6350	1.608	3948	7780	1.97	93	223	2.40 J

Prepared by: Clinton Dworshak
Utah Div. of Oil & Mining

Phone: (801) 538-5280
FAX: (801)359-3940

Date: October 3, 2005
Salt Lake City, Utah

ENGINEERING STIPULATIONS -

Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

From: Ed Bonner
To: Whitney, Diana
Date: 9/28/2005 11:35:37 AM
Subject: Well Clearance

The following wells have been given cultural resource clearance by the Trust Lands Cultural Resources Group:

The Houston Exploration Company
Buck Canyon 9-16-12-21
Buck Canyon 11-16-12-21
Buck Canyon 13-16-12-21
Buck Canyon 15-16-12-21

EOG Resources, Inc
Chapita Wells Unit 701-2
State of Utah 17-8-18-14

If you have any questions regarding this matter please give me a call.

CC: Garrison, LaVonne; Hill, Brad; Hunt, Gil

OPERATOR CHANGE WORKSHEET

ROUTING

- | |
|--------|
| 1. DJJ |
| 2. CDW |

X Change of Operator (Well Sold)

Designation of Agent/Operator

Operator Name Change

Merger

The operator of the well(s) listed below has changed, effective:

9/1/2005

FROM: (Old Operator): N2525-The Houston Exploration Company 1100 Louisiana, Suite 2000 Houston, TX 77002 Phone: 1-(713) 830-6938	TO: (New Operator): N2750-Enduring Resources, LLC 475 17th Street, Suite 1500 Denver, CO 80202 Phone: 1-(303) 350-5102
---	--

CA No.

Unit:

WELL(S)

NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS	
E BENCH 16-16-11-22	16	110S	220E	4304737121		State	GW	NEW	C
E BENCH 14-16-11-22	16	110S	220E	4304737122		State	GW	NEW	C
E BENCH 9-16-11-22	16	110S	220E	4304737123		State	GW	NEW	C
E BENCH 6-16-11-22	16	110S	220E	4304737124		State	GW	NEW	C
E BENCH 2-16-11-22	16	110S	220E	4304737125		State	GW	NEW	C
E BENCH 4-16-11-22	16	110S	220E	4304737126		State	GW	NEW	C
E BENCH 8-16-11-22	16	110S	220E	4304737127		State	GW	NEW	C
E BENCH 12-16-11-22	16	110S	220E	4304737128		State	GW	NEW	C
E BENCH 5-16-11-22	16	110S	220E	4304737129		State	GW	NEW	C
E BENCH 13-16-11-22	16	110S	220E	4304737130		State	GW	NEW	C
ASPHALT WASH 3-16-11-24	16	110S	240E	4304736886		State	GW	NEW	C
ASPHALT WASH 11-16-11-24	16	110S	240E	4304737088		State	GW	NEW	C
ASPHALT WASH 5-16-11-24	16	110S	240E	4304737089		State	GW	NEW	C
LITTLE PACK MTN 1-16-12-20	16	120S	200E	4304736981		State	GW	NEW	C
LITTLE PACK MTN 7-32-12-20	32	120S	200E	4304736980		State	GW	NEW	C
BUCK CYN 13-16-12-21	16	120S	210E	4304737118		State	GW	NEW	C
BUCK CYN 11-16-12-21	16	120S	210E	4304737119		State	GW	NEW	C

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 9/26/2005
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 9/26/2005
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 9/29/2005
- Is the new operator registered in the State of Utah: YES Business Number: 5771233-0161
- If **NO**, the operator was contacted on: _____
- (R649-9-2) Waste Management Plan has been received on: _____ Requested 9/29/05
- Inspections of LA PA state/fee well sites complete on: n/a

6c. Reports current for Production/Disposition & Sundries on:

9/29/2005

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM not yet BIA n/a

8. **Federal and Indian Units:**

The BLM or BIA has approved the successor of unit operator for wells listed on: _____ not yet

9. **Federal and Indian Communization Agreements ("CA"):**

The BLM or BIA has approved the operator for all wells listed within a CA on: n/a

10. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: n/a

DATA ENTRY:

1. Changes entered in the **Oil and Gas Database** on: 9/29/2005
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 9/29/2005
3. Bond information entered in RBDMS on: 9/30/2005
4. Fee/State wells attached to bond in RBDMS on: 9/30/2005
5. Injection Projects to new operator in RBDMS on: n/a
6. Receipt of Acceptance of Drilling Procedures for APD/New on: 9/26/2005

FEDERAL WELL(S) BOND VERIFICATION:

1. Federal well(s) covered by Bond Number: UTB000173

INDIAN WELL(S) BOND VERIFICATION:

1. Indian well(s) covered by Bond Number: n/a

FEE & STATE WELL(S) BOND VERIFICATION:

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0008031
2. The **FORMER** operator has requested a release of liability from their bond on: n/a
The Division sent response by letter on: _____

LEASE INTEREST OWNER NOTIFICATION:

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: n/a

COMMENTS:

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER:
2. NAME OF OPERATOR: The Houston Exploration Company <i>N2525</i>		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: 1100 Louisiana, Ste 2000 CITY Houston STATE TX ZIP 77002		7. UNIT or CA AGREEMENT NAME:
PHONE NUMBER: (713) 830-6938		8. WELL NAME and NUMBER: See Attached List
4. LOCATION OF WELL FOOTAGES AT SURFACE: See Attached List		9. API NUMBER:
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		10. FIELD AND POOL, OR WILDCAT:
COUNTY: Uintah		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: Effective 9/1/05	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE 9/1/05	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Enduring Resources, LLC Operator #N 2750 Utah State Bond #RLB0008031
475 17th Street, Ste 1500
Denver, CO 80202

Contact : Frank Hutto 303-350-5102

Frank Hutto VP. OPS
Signature & Title
Date 9/19/05

NAME (PLEASE PRINT) <u>Joanne Hresko</u>	TITLE <u>Vice President/General Manager Onshore</u>
SIGNATURE <i>Joanne Hresko</i>	DATE <u>9/2/2005</u>

(This space for State use only) **APPROVED** 9/29/2005
Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

RECEIVED
SEP 26 2005
DIV. OF OIL, GAS & MINING

TRANSFER OF OPERATOR

NATURAL BUTTES FIELD, UINTAH COUNTY, UTAH
DRILLED WELLS, TO BE OPERATED BY ENDURING RESOURCES, LLC

API Well Number	Well Name	Well Status	Qtr/Qtr	Section	Township-Range	FNL/FSL	FEL/FWL	Latitude	Longitude
43047355550000	Bonanza #10D-18	SI	NWSE	18	9S-24E	1437 S	1800 E	40.03340	-109.25282
43047355510000	Bonanza #12D-12	Producing	NWSW	12	9S-23E	1556 S	867 W	40.04788	-109.28055
43047356930000	Bonanza #2D-27	Producing	NWNE	27	9S-24E	1064 N	1824 E	40.01123	-109.19600
43047359080000	Bonanza 10-11	Producing	NWSE	11	9S-23E	1991 S	1755 E	40.04866	-109.29035
43047356920000	Bonanza 10D-8	SI	NWSE	8	9S-24E	1510 S	1768 E	40.04789	-109.23383
43047355520000	Bonanza 1-11	Producing	NWNW	11	9S-23E	990 N	990 E	40.05431	-109.29891
43047359290000	Bonanza 12-20	Drig	NWSW	20	9S-25E	1998 S	825 W	40.01947	-109.13150
43047-359210000	Bonanza 12A-18	Producing	NWSW	18	9S-24E	2067 S	813 W	40.03430	-109.26242
43047359090000	Bonanza 14-12	Evaluating	SESW	12	9S-23E	505 S	2001 W	40.04455	-109.27693
43047359940000	Bonanza 4-18	WOPL	NWNW	18	9S-24E	706 N	682 W	40.04119	-109.26288
43047-356220000	Bonanza 4D-16	Producing	NWNW	16	9S-24E	1152 N	1209 W	40.04000	-109.22349
43047358600000	Bonanza 6-36	Producing	SESW	36	9S-24E	2217 N	2009 W	39.99336	-109.16393
43047359120000	Bonanza 6B-8	Producing	SESW	8	9S-24E	2017 N	1878 W	40.05213	-109.24004
43047359200000	Bonanza 8D-7	Producing	SENE	7	9S-24E	1992 N	477 E	40.05220	-109.24845
43047359050000	Buck Canyon 15-24	P&A	SW/SE	24	12S-21E	700 S	2139 E	39.75386	-109.5134
43047348150000	Cartwright 2-35	TA	NWNE	35	9S-24E	858 N	2104 E	39.99733	-109.17882
43047332510000	East Bench 11-16	WOC	NESW	16	11S-22E	S S	1980 W	39.85889	-109.46172
43047347560000	Hoss 15	Producing	SWSE	20	9S-25E	1291 S	2088 E	40.01767	-109.12236
43047348140000	Little Joe 11-7	TA	NENE	7	9S-25E	710 N	644 E	40.05562	-109.13601
43047361500000	Rainbow 14-17	WOC	SESW	17	11S-24E	780 S	1726 W	39.85689	-109.25731
43047361840000	Rainbow 2-16	WOC	NWNE	16	11S-24E	837 N	2136 E	39.86708	-109.23348
43047353630000	Southman Canyon 10D-36	Producing	NWSE	36	9S-23E	1757 S	1650 E	39.98991	-109.27148
43047353640000	Southman Canyon 12D-36	Producing	NWSW	36	9S-23E	1518 S	1069 W	39.98977	-109.28040
43047357700000	Southman Canyon 14C-36	Producing	SESW	36	9S-23E	648 S	1717 W	39.98689	-109.27716
43047357720000	Southman Canyon 16C-36	Producing	SESE	36	9S-23E	542 S	736 E	39.98607	-109.26912
43047356910000	Southman Canyon 2D-30	Producing	NWNE	30	9S-24E	1171 N	1502 E	40.01111	-109.25269
43047353650000	Southman Canyon 2D-36	Producing	NWNE	36	9S-23E	960 N	1751 E	39.99711	-109.27228
43047353610000	Southman Canyon 4D-36	Producing	NWNW	36	9S-23E	1163 N	1137 W	39.99623	-109.28012
43047353620000	Southman Canyon 6D-36	Producing	SESW	36	9S-23E	2466 N	2271 W	39.99336	-109.27635
43047357710000	Southman Canyon 8C-36	Producing	SENE	36	9S-23E	2185 N	694 E	39.99358	-109.26783
43047355590000	Thurston Federal #12-1	Producing	SESW	12	12S-21E	692 S	1959 W	39.78280	-109.51768

TRANSFER OF OPERATOR BLM APPROVED WELLS #2

PREVIOUS OPERATOR: Houston Exploration Company

NEW OPERATOR: Enduring Resources, LLC

EFFECTIVE DATE: September 1st, 2005

Well Name	Q/Q	Sec	T	R	Lease Number	Footages f/ Sec Lines - SL	API Number
Asphalt Wash 13-7	SW/SW	7	11S	24E	UTU-73910	739' FSL & 629' FWL	43-047-36234
Bonanza 16-18	SE/SE	18	9S	24E	UTU-73457	861' FSL & 715' FEL	43-047-35992
Bonanza 4-11	NW/NW	11	9S	23E	UTU-74426	671' FNL & 729' FWL	43-047-35968
Bonanza 10D-12	NW/SE	12	9S	23E	UTU-74426	1,785' FSL & 1,855' FEL	43-047-35919
Bonanza 12-11	NW/SW	11	9S	23E	UTU-74426	1748' FSL & 420' FWL	43-047-35916
Bonanza 14-18	SE/SW	18	9S	24E	UTU-73457	472' FSL & 2,010' FWL	43-047-35993
Bonanza 14A-8	SE/SW	8	9S	24E	UTU-73457	907' FSL & 2,298' FWL	43-047-35952
Bonanza 16A-27	SE/SE	27	9S	24E	UTU-80571	862' FSL & 581' FEL	43-047-35923
Bonanza 2-21	NW/NE	21	8S	25E	UTU-73470	1,207' FNL & 1,541' FEL	43-047-35926
Bonanza 3-8	NW/NW	8	9S	24E	UTU-73457	573' FNL & 1,518' FWL	43-047-35966
Bonanza 6D-7	SE NW	7	9S	24E	UTU-73457	2,310' FNL & 2,310' FWL	43-047-35690
Bonanza 8-11	SE/NE	11	9S	23E	UTU-74426	2,163 FNL & 615' FEL	43-047-35907
Bonanza 8B-27	SE/NE	27	9S	24E	UTU-80571	1,830' FNL & 735' FEL	43-047-35923
Buck Camp 4-25	NW/NW	25	11S	22E	UTU-74424	804 FNL & 695 FWL	43-047-36276
Buck Camp 4-26	NW/NW	26	11S	22E	UTU-74974	660' FNL & 660' FWL	43-047-36274
Buck Canyon 1-24	NE/NE	24	12S	21E	UTU-73440	488' FNL & 833' FEL	43-047-35606
Buck Canyon 15-24	SW/SE	24	12S	21E	UTU-73440	700' FSL & 2,139' FEL	43-047-35905
Buck Canyon 7-24	SW/NE	24	12S	21E	UTU-73440	2,041' FNL & 2,171' FEL	43-047-35904
Buck Canyon 9-24	NE/SE	24	12S	21E	UTU-73440	1784' FSL & 855' FEL	43-047-35903
Rainbow 1-17	NE/NE	17	11S	24E	UTU-73920	795' FNL & 586' FEL	43-047-36151
Southman Canyon #14-30	SE/SW	30	9S	24E	UTU-80571	740' FSL & 1,737' FWL	43-047-35914
Southman Canyon #4C-30	NW/NW	30	9S	24E	UTU-80571	676' FNL & 568' FWL	43-047-35913
Southman Canyon 12-30	NW/SW	30	9S	24E	UTU-80571	1,912' FSL & 513' FWL	43-047-36104
Southman Canyon 8-30	SE/NE	30	9S	24E	UTU-80571	1,875' FNL & 818' FEL	43-047-35994
Southman Canyon 9-30	NE/SE	30	9S	24E	UTU-80571	2,089' FSL & 831' FEL	43-047-36019

* 43047-35906
• 43047-35953

TRANSFER OF OPERATOR STATE OF UTAH APPROVED AND PENDING

#3

PREVIOUS OPERATOR: Houston Exploration Company

NEW OPERATOR: Enduring Resources, LLC

EFFECTIVE DATE: September 1st, 2005

Well Name	Q/Q	Sec	T	R	Lease Number	Footages f/ Sec Lines - SL	API Number	FIELD	Well Type
Asphalt Wash 11-16-11-24	NESW	16	11S	24E	ML-73921	2000 FSL & 1900 FWL	43-047-37088	Undesignated	Gas
Asphalt Wash 12-16-11-24	NWSW	16	11S	24E	ML-47080	2060 FSL & 839 FWL	43-047-36873	Undesignated	Gas
Asphalt Wash 14-16-11-24	SESW	16	11S	24E	ML-47080	537 FSL & 2140 FWL	43-047-36876	Undesignated	Gas
Asphalt Wash 3-16-11-24	NENW	16	11S	24E	ML-47080	825 FNL & 2116 FWL	43-047-36886	Undesignated	Gas
Asphalt Wash 4-16-11-24	NWNW	16	11S	24E	ML-47080	521 FNL & 766 FWL	43-047-36885	Undesignated	Gas
Asphalt Wash 5-16-11-24	SWNW	16	11S	24E	ML-47080	1880 FNL & 630 FWL	43-047-37089	Undesignated	Gas
Asphalt Wash 7-16-11-24	SWNE	16	11S	24E	ML-47080	1781 FNL & 1676 FEL	43-047-36874	Undesignated	Gas
Asphalt Wash 8-16-11-24	SENE	16	11S	24E	ML-47080	1905 FNL & 642 FEL	43-047-36875	Undesignated	Gas
Bonanza 14-20	SESW	20	9S	25E	ML-45558	838' FSL & 1,922' FWL	43-047-35930	Chapita Wells	Gas
Bonanza 4-20	NWNW	20	9S	25E	ML-45558	933' FNL & 583 FWL	43-047-35924	Chapita Wells	Gas
Bonanza 4-29	NWNW	29	9S	25E	ML-45559	600' FNL & 596' FWL	43-047-36010	Chapita Wells	Gas
Bonanza 4-36	NWNW	36	9S	24E	ML-46527	258' FNL & 862' FWL	43-047-35861	Natural Buttes	Gas
Bonanza 6-20	SENW	20	9S	25E	ML-45558	2,178' FNL & 1,839' FWL	43-047-35928	Chapita Wells	Gas
Buck Canyon 9-16-12-21	NESE	16	12S	21E	ML-47085	1980' FSL & 660' FEL	43-047-37091	Buck Canyon	Gas
Buck Canyon 11-16-12-21	NESW	16	12S	21W	ML-47085	NA	43-047-37119	Undesignated	Gas
Buck Canyon 13-16-21-21	SWSW	16	21S	21W	ML-47085	NA	43-047-37118	Undesignated	Gas
Buck Canyon 15-16-12-21	SWSE	16	12S	21W	ML-47085	NA	43-047-37120	Buck Canyon	Gas
East Bench 1-16	NENE	16	11S	22E	ML-46911	660' FNL & 660' FEL	43-047-36126	Undesignated	Gas
East Bench 15-16	SWSE	16	11S	22E	ML-46911	545' FSL & 1,848' FEL	43-047-36128	Undesignated	Gas
East Bench 3-16	NENW	16	11S	22E	ML-46911	832' FNL & 1,978' FWL	43-047-36125	Undesignated	Gas
East Bench 7-16	SWNE	16	11S	22E	ML-46911	1,909' FNL & 1,643' FEL	43-047-36127	Undesignated	Gas
East Bench 12-16-11-22	NWSW	16	11S	22E	ML-46911	1862 FSL & 838 FEL	43-047-37128	Undesignated	Gas
East Bench 13-16-11-22	SWSW	16	11S	22E	ML-46911	880 FSL & 750 FWL	43-047-37130	Undesignated	Gas
East Bench 14-16-11-22	SESW	16	11S	22E	ML-46911	848 FSL & 1930 FWL	43-047-37122	Undesignated	Gas
East Bench 16-16-11-22	SESE	16	11S	22E	ML-46911	663 FSL & 1055 FEL	43-047-37121	Undesignated	Gas
East Bench 2-16-11-22	NWNE	16	11S	22E	ML-46911	705 FNL & 2077 FEL	43-047-37125	Undesignated	Gas
East Bench 4-16-11-22	NWNW	16	11S	22E	ML-46911	760 FNL & 860 FWL	43-047-37126	Undesignated	Gas
East Bench 5-16-11-22	SWNW	16	11S	22E	ML-46911	1980 FNL & 758 FWL	43-047-37129	Undesignated	Gas
East Bench 6-16-11-22	SENW	16	11S	22E	ML-46911	1887 FNL & 2138 FWL	43-047-37124	Undesignated	Gas
East Bench 8-16-11-22	SENE	16	11S	22E	ML-46911	1880 FNL & 780 FEL	43-047-37127	Undesignated	Gas
East Bench 9-16-11-22	NESE	16	11S	22E	ML-46911	2035 FSL & 1422 FEL	43-047-37123	Undesignated	Gas
Gusher 6-2	SENW	2	6S	19E	ML-49144	1550 FNL & 1025 FWL	43-047-36963	Moffit Canal	Oil
Hanging Rock 1-32	NENE	32	11S	23E	ML-47079	542' FNL & 690' FEL	43-047-36309	Undesignated	Gas
Little Pack Mountain 1-16	NWNW	16	12S	20E	ML-47082	609 FNL & 688 FEL	43-047-36981	Wildcat	Gas
Little Pack Mountain 7-32	SWNE	32	12S	20E	ML-47083	1792 FNL & 1797 FEL	43-047-36980	Wildcat	Gas
Rock House 12-36-10-23	NWSW	36	10S	23E	ML-47907	1844 FSL & 755 FWL	43-047-36534	Natural Buttes	Gas
Rock House 13-32-10-23	SWSW	32	10S	23E	ML-47063	564 FSL & 471 FWL	43-047-36411	Natural Buttes	Gas
Rock House 1-36-10-22	NENE	36	10S	22E	ML-47061	620 FNL & 850 FEL	43-047-36408	Natural Buttes	Gas
Rock House 3-36-10-22	NENW	36	10S	22E	ML-47061	934 FNL & 1783 FWL	43-047-36407	Natural Buttes	Gas
Rock House 4-32-10-23	SWNW	32	10S	23E	ML-47063	1406 FNL & 562 FWL	43-047-36412	Natural Buttes	Gas
Rock House 7-36-10-22	SWNE	36	10S	22E	ML-47061	2209 FNL & 2445 FEL	43-047-36409	Natural Buttes	Gas
Rock House 9-32-10-23	NESE	32	10S	23E	ML-47063	2008 FSL & 1042 FEL	43-047-36327	Natural Buttes	Gas
Rockhouse #13-36	SWSW	36	10S	22E	ML-46907	486 FSL & 844' FWL	43-047-35902	Natural Buttes	Gas
Rockhouse 16-2	SESE	2	11S	23E	ML-47078	909' FSL & 748' FEL	43-047-36152	Rockhouse	Gas
Seep Springs 10-13-12-24	NWSE	13	12S	24E	ML-49275	1950 FSL & 1802 FEL	43-047-36634	Undesignated	Gas
Seep Springs 1-13-12-24	NENE	13	12S	24E	ML-49275	753 FNL & 487 FEL	43-047-36628	Undesignated	Gas
Seep Springs 15-11-12-24	SWSE	11	12S	24E	ML-49274	829 FSL & 2178 FEL	43-047-36626	Undesignated	Gas
Seep Springs 15-13-12-24	SWSE	13	12S	24E	ML-49275	622 FSL & 1806 FEL	43-047-36630	Undesignated	Gas
Seep Springs 16-11-12-24	SESE	11	12S	24E	ML-49274	659 FSL & 466 FEL	43-047-36625	Undesignated	Gas
Seep Springs 16-13-12-24	SESE	13	12S	24E	ML-49275	686 FSL & 640 FEL	43-047-36629	Undesignated	Gas
Seep Springs 2-13-12-24	NWNE	13	12S	24E	ML-49275	465 FNL & 1807 FEL	43-047-36627	Undesignated	Gas
Seep Springs 7-13-12-24	SWNE	13	12S	24E	ML-49275	FNL & FEL	43-047-36631	Undesignated	Gas
Seep Springs 8-13-12-24	SENE	13	12S	24E	ML-49275	1969 FNL & 642 FEL	43-047-36632	Undesignated	Gas
Seep Springs 9-13-12-24	NESE	13	12S	24E	ML-49275	663 FSL & 1960 FEL	43-047-36633	Undesignated	Gas
Southman Canyon 11-36-9-23	NESW	36	9S	23E	ML-47782	1965 FSL & 1953 FWL	43-047-36535	Natural Buttes	Gas
Southman Canyon 13-36-9-23	SWSW	36	9S	23E	ML-47782	467 FSL & 823 FWL	43-047-36532	Natural Buttes	Gas

TRANSFER OF OPERATOR STATE OF UTAH APPROVED AND PENDING

PREVIOUS OPERATOR: Houston Exploration Company

NEW OPERATOR: Enduring Resources, LLC

EFFECTIVE DATE: September 1st, 2005

Well Name	Q/Q	Sec	T	R	Lease Number	Footages f/ Sec Lines - SL	API Number	FIELD	Well Type
Southman Canyon 1-36-9-23	NENE	36	9S	23E	ML-47782	681 FNL & 496 FEL	43-047-36537	Natural Buttes	Gas
Southman Canyon 15-36-9-23	SWSE	36	9S	23E	ML-47782	529 FSL & 1784 FEL	43-047-36529	Natural Buttes	Gas
Southman Canyon 3-36-9-23	NENW	36	9S	23E	ML-47782	464 FNL & 1815 FWL	43-047-36530	Natural Buttes	Gas
Southman Canyon 5-36-9-23	SWNW	36	9S	23E	ML-47782	2028 FNL & 499 FWL	43-047-36531	Natural Buttes	Gas
Southman Canyon 7-36-9-23	SENE	36	9S	23E	ML-47782	2184 FNL & 1994 FEL	43-047-36536	Natural Buttes	Gas
Southman Canyon 9-36-9-23	NESE	36	9S	23E	ML-47782	1978 FNL & 657 FEL	43-047-36533	Natural Buttes	Gas

TRANSFER OF OPERATOR BLM PENDING WELLS

PREVIOUS OPERATOR: Houston Exploration Company

NEW OPERATOR: Enduring Resources, LLC

EFFECTIVE DATE: September 1st, 2005

Well Name	Q/Q	Sec	T	R	Lease Number	Footages f/ Sec Lines - SL	API Number
Asphalt Wash 13-6	SW/SW	6	11S	24E	UTU-73919	400' FSL & 550' FWL	
Asphalt Wash 10-9-11-24	NW SE	9	11S	24E	UTU-73920	1846 FSL & 1942 FEL	43-047-37071
Asphalt Wash 11-9-11-24	NE SW	9	11S	24E	UTU-73920	1799 FSL & 1782 FWL	43-047-37073
Asphalt Wash 12-6-11-24	NW SW	6	11S	24E	UTU-73919	1844 FSL & 683 FWL	43-047-37066
Asphalt Wash 14-6-11-24	SE SW	6	11S	24E	UTU-73919	704 FSL & 2123 FWL	43-047-37067
Asphalt Wash 14-9-11-24	SE SW	9	11S	24E	UTU-73920	460 FSL & 2115 FWL	43-047-37076
Asphalt Wash 15-9-11-24	SW SE	9	11S	24E	UTU-73920	804 FSL & 1990 FEL	43-047-37074
Asphalt Wash 16-9-11-24	SE SE	9	11S	24E	UTU-73920	826 FSL & 472 FEL	43-047-37075
Asphalt Wash 2-6-11-24	NW NE	6	11S	24E	UTU-73919	735 FNL & 1590 FEL	43-047-37061
Asphalt Wash 2-7-11-24	NW NE	7	11S	24E	UTU-73919	621 FNL & 2462 FEL	43-047-37068
Asphalt Wash 2-9-11-24	NW NE	9	11S	24E	UTU-73920	829 FNL & 1774 FEL	43-047-37070
Asphalt Wash 3-6-11-24	NE NW	6	11S	24E	UTU-73919	792 FNL & 1925 FWL	43-047-37062
Asphalt Wash 4-6-11-24	NW NW	6	11S	24E	UTU-73919	820 FNL & 1007 FWL	43-047-37063
Asphalt Wash 5-6-11-24	SW NW	6	11S	24E	UTU-73919	1738 FNL & 716 FWL	43-047-37064
Asphalt Wash 6-7-11-24	SE NW	7	11S	24E	UTU-73919	2013 FNL & 2241 FWL	43-047-37069
Asphalt Wash 7-6-11-24	SW NE	6	11S	24E	UTU-73919	1616 FNL & 1615 FEL	43-047-37065
Asphalt Wash 7-9-11-24	SE NE	9	11S	24E	UTU-73920	1883 FNL & 1854 FEL	43-047-37072
Asphalt Wash 1-7-11-24	NE NE	7	11S	24E	UTU-73919	426 FNL & 270 FEL	43-047-37084
Asphalt Wash 4-7-11-24	NW NW	7	11S	24E	UTU-73919	856 FNL & 860 FWL	43-047-37085
Asphalt Wash 7-7-11-24	SW NE	7	11S	24E	UTU-73919	1909 FNL & 1893 FEL	43-047-37087
Asphalt Wash 8-7-11-24	SE NE	7	11S	24E	UTU-73919	1998 FNL & 683 FEL	43-047-37086
Bonanza 4-7	NW/NW	7	9S	24E	UTU-73457	809' FNL & 670' FWL	43-047-36017
Bonanza 8-17	SW/NE	17	9S	24E	UTU-73457	1865' FNL & 584' FEL	43-047-36041
Bonanza 11-11-9-23	NE SW	11	9S	23E	UTU-74426	2036 FSL & 2043 FWL	43-047-36649
Bonanza 11-12-9-23	NE SW	12	9S	23E	UTU-74426	1799 FSL & 1948 FWL	43-047-36655
Bonanza 11-18-9-24	NE SW	18	9S	24E	UTU-73457	1785 FSL & 2133 FWL	43-047-36637
Bonanza 12-23-9-24	NW/SW	23	9S	24E	UTU-81311	1882 FSL & 699 FWL	43-047-36640
Bonanza 12-35	NW/SW	35	9S	24E	UTU 73459	1374' FSL & 858' FWL	43-047-36020
Bonanza 13-11-9-23	SW SW	11	9S	23E	UTU-74426	463 FSL & 773 FWL	43-047-36650
Bonanza 13-12-9-23	SW SW	12	9S	23E	UTU-74426	661 FSL & 656 FWL	43-047-36528
Bonanza 13-18-9-24	SW SW	18	9S	24E	UTU-73457	767 FSL & 583 FWL	43-047-36638
Bonanza 14-11-9-23	SE SW	11	9S	23E	UTU-74426	756 FSL & 1859 FWL	43-047-36651
Bonanza 14-23-9-24	SE/SW	23	9S	24E	UTU-81311	560 FSL & 1878 FWL	43-047-36641
Bonanza 15-11-9-23	SW SE	11	9S	23E	UTU-74426	660 FSL & 1980 FEL	43-047-36652
Bonanza 15-12-9-23	SW SE	12	9S	23E	UTU-74426	607 FSL & 1920 FEL	43-047-36656
Bonanza 15-18-9-24	SW SE	18	9S	24E'	UTU-73457	463 FSL & 2162 FEL	43-047-36639
Bonanza 16-12-9-23	SE SE	12	9S	23E	UTU-74426	855 FSL & 536 FEL	43-047-36657
Bonanza 16-8	SE/SE	8	9S	24E	UTU-73457	588' FSL & 524' FEL	43-047-36101
Bonanza 2-11-9-23	NW NE	11	9S	23E	UTU 74426	664 FNL & 1925 FEL	43-047-36643
Bonanza 2-12-9-23	NW NE	12	9S	23E	UTU-74426	743 FNL & 1962 FEL	43-047-36527
Bonanza 3-11-9-23	NE NW	11	9S	23E	UTU 74426	499 FNL & 1898 FWL	43-047-36644
Bonanza 3-12-9-23	NE NW	12	9S	23E	UTU-74426	734 FNL & 1866 FWL	43-047-36524
Bonanza 4-35	NW/NW	35	9S	24E	UTU 73459	789' FNL & 807' FWL	43-047-35925
Bonanza 5-11-9-23	SW NW	11	9S	23E	UTU 74426	1794 FNL & 609 FWL	43-047-36645

TRANSFER OF OPERATOR BLM PENDING WELLS

PREVIOUS OPERATOR: Houston Exploration Company

NEW OPERATOR: Enduring Resources, LLC

EFFECTIVE DATE: September 1st, 2005

Well Name	Q/Q	Sec	T	R	Lease Number	Footages f/ Sec Lines - SL	API Number
Bonanza 5-12-9-23	SW NW	12	9S	23E	UTU-74426	1996 FNL & 558 FWL	43-047-36526
Bonanza 5-18-9-24	SW NW	18	9S	24E	UTU-73457	2147 FNL & 662 FWL	43-047-36635
Bonanza 5-22	SW/NW	22	8S	25E	UTU-73470	1,932' FNL & 415' FWL	43-047-35918
Bonanza 5-24-9-24	SW/NW	24	9S	24E	UTU-73458	2167 FNL & 714 FWL	43-047-36642
Bonanza 6-11-9-23	SE NW	11	9S	23E	UTU-74426	2069 FNL & 1801 FWL	43-047-36646
Bonanza 6-12-9-23	SE NW	12	9S	23E	UTU-74426	2114 FNL & 1871 FWL	43-047-36525
Bonanza 7-11-9-23	SW NE	11	9S	23E	UTU-74426	2060 FNL & 2134 FEL	43-047-36647
Bonanza 7-12-9-23	SW NE	12	9S	23E	UTU-74426	2065 FNL & 2159 FEL	43-047-36653
Bonanza 8-35	SENE	35	9S	24E	UTU-73459	1987' FNL & 909' FEL	43-047-36105
Bonanza 9-11-9-23	NE SE	11	9S	23E	UTU-74426	2008 FSL & 553 FEL	43-047-36648
Bonanza 9-12-9-23	NE SE	12	9S	23E	UTU-74426	1980 FSL & 660 FEL	43-047-36654
Bonanza 9-18-9-24	NE SE	18	9S	24E	UTU-73457	2009 FSL & 852 FEL	43-047-36636
Bonanza 9-22	NE/SE	22	9S	24E	UTU-75118	1,969' FSL & 495' FEL	43-047-36102
East Bench 9-20	NE/SE	20	11S	22E	UTU-73905	2,170' FSL & 472' FEL	43-047-36275
Rock House 12-30-10-23	NE SW	30	10S	23E	UTU-76281	2320 FSL & 1980 FWL	43-047-36548
Rock House 12-31-10-23	NW SW	31	10S	23E	UTU-76281	1900 FSL & 460 FWL	43-047-36552
Rock House 13-30-10-23	SW SW	30	10S	23E	UTU-76281	553 FSL & 573 FWL	43-047-36549
Rock House 14-31-10-23	SE SW	31	10S	23E	UTU-76281	860 FSL & 1890 FWL	43-047-36553
Rock House 3-31-10-23	NE NW	31	10S	23E	UTU-76281	854 FNL & 1940 FWL	43-047-36551
Rock House 5-30-10-23	SW NW	30	10S	23E	UTU-76281	1858 FNL & 703 FWL	43-047-36547
Rock House 5-31-10-23	SW NW	31	10S	23E	UTU-76281	2055 FNL & 2097 FWL	43-047-36550
Rock House 6-31-10-23	SE NW	31	10S	23E	UTU-76281	2059 FNL & 2111 FWL	43-047-36554
Rockhouse #12-30	NW/SW	30	10S	23E	UTU-80571	1,980' FSL & 660' FWL	43-047-36018 x
Rockhouse 13C-31	SW/SW	31	10S	23E	UTU-76281	135' FSL & 365' FWL	43-047-35911
Rockhouse 4D-30	NW NW	30	10S	23E	UTU-76281	1,116 FNL & 1,135' FWL	43-047-35882
Rockhouse 4D-31	NW NW	31	10S	23E	UTU-76281	990' FNL & 990' FWL	43-047-35807
Southman Canyon 12-3-11-24	NW/SW	3	11S	24E	UTU-73918	1,950' FSL & 514' FWL	43-047-36272
Southman Canyon 12-30-10-24	NW/SW	30	10S	24E	UTU-65371	2,118' FSL & 502' FWL	43-047-36238
Southman Canyon 13-30	SW/SW	30	9S	24E	UTU-80571	765' FSL & 303' FWL	43-047-36018
Southman Canyon 16-31-10-24	SE/SE	31	10S	24E	UTU-65371	621' FSL & 575' FEL	43-047-36270
Southman Canyon 4-30-10-24	NW/NW	30	10S	24E	UTU 65371	649' FNL & 607' FWL	43-047-36237
Southman Canyon 5-19-10-24	SW/NW	19	10S	24E	UTU-65371	1,978' FNL & 855' FWL	43-047-36236
Southman Canyon 6-30	SE/NW	30	9S	24E	UTU-80571	2,015' FNL & 2,581' FWL	43-047-36103

x Duplicate API -
Different well name



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

October 5, 2005

Enduring Resources, LLC
475 17th Street, Suite 1500
Denver, CO 80202

Re: Buck Canyon 13-16-12-21 Well, 639' FSL, 856' FWL, SW SW, Sec. 16,
T. 12 South, R. 21 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-37118.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
SITLA

Operator: Enduring Resources, LLC
Well Name & Number Buck Canyon 13-16-12-21
API Number: 43-047-37118
Lease: ML-47085

Location: SW SW Sec. 16 T. 12 South R. 21 East

Conditions of Approval

1. **General**

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for Permit to Drill.

2. **Notification Requirements**

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- 24 hours prior to cementing or testing casing
- 24 hours prior to testing blowout prevention equipment
- 24 hours prior to spudding the well
- within 24 hours of any emergency changes made to the approved drilling program
- prior to commencing operations to plug and abandon the well

The following are Division of Oil, Gas and Mining contacts and their work telephone numbers (please leave a voice mail message if the person is not available to take the call):

- Dan Jarvis at (801) 538-5338
- Carol Daniels at (801) 538-5284 (spud)

3. **Reporting Requirements**

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. Compliance with the State of Utah Antiquities Act forbids disturbance of archeological, historical, or paleontological remains. Should archeological, historical or paleontological remains be encountered during your operations, you are required to immediately suspend all operations and immediately inform the Trust Lands Administration and the Division of State History of the discovery of such remains.

5. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)

6. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.
7. Cement volume for the 4 1/2" production string shall be determined from actual hole diameter in order to place cement from the pipe setting depth back to $\pm 2500'$ MD as indicated in the submitted drilling plan.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Request to Transfer Application or Permit to Drill


(This form should accompany a Sundry Notice, Form 9, requesting APD transfer)

Well name:	Buck Canyon 13-16-21-21
API number:	4304737118
Location:	Qtr-Qtr: SWSW Section: 16 Township: 12S Range: 21E
Company that filed original application:	The Houston Exploration Company
Date original permit was issued:	10/05/2005
Company that permit was issued to:	The Houston Exploration Company

Check one	Desired Action:
	Transfer pending (unapproved) Application for Permit to Drill to new operator
	The undersigned as owner with legal rights to drill on the property, hereby verifies that the information as submitted in the pending Application for Permit to Drill, remains valid and does not require revision. The new owner of the application accepts and agrees to the information and procedures as stated in the application.
<input checked="" type="checkbox"/>	Transfer approved Application for Permit to Drill to new operator
	The undersigned as owner with legal rights to drill on the property as permitted, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.	Yes	No
If located on private land, has the ownership changed?		✓
If so, has the surface agreement been updated?		
Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location?		✓
Have there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well?		✓
Have there been any changes to the access route including ownership or right-of-way, which could affect the proposed location?		✓
Has the approved source of water for drilling changed?		✓
Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation?		✓
Is bonding still in place, which covers this proposed well? Bond No. <u>RLB0008031</u>	✓	

Any desired or necessary changes to either a pending or approved Application for Permit to Drill that is being transferred, should be filed on a Sundry Notice, Form 9, or amended Application for Permit to Drill, Form 3, as appropriate, with necessary supporting information as required.

Name (please print) Alvin R. (Al) Arlian Title Landman - Regulatory Specialist
 Signature  Date 11/03/2005
 Representing (company name) Enduring Resources, LLC

The person signing this form must have legal authority to represent the company or individual(s) to be listed as the new operator on the Application for Permit to Drill.

(3/2004)

CONFIDENTIAL

RECEIVED
NOV 04 2005
DIV. OF OIL, GAS & MINING

K

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

	5. LEASE DESIGNATION AND SERIAL NUMBER: ML-47085
--	--

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: Enduring Resources, LLC		7. UNIT or CA AGREEMENT NAME:
3. ADDRESS OF OPERATOR: 475 17th Street, Suite 1500 CITY Denver STATE CO ZIP 80202		8. WELL NAME and NUMBER: Buck Canyon 13-16-21-21
PHONE NUMBER: (303) 573-1222		9. API NUMBER: 4304737118
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1800' FSL & 2038' FWL		10. FIELD AND POOL, OR WILDCAT:

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: **SWSW 16 12S 21E S** COUNTY: **Uintah**

STATE: **UTAH**

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Change well name and number</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

CHANGE WELL NAME AND NUMBER:

FROM: Buck Canyon 13-16-21-21
TO: Buck Canyon 12-21-14-16

RECEIVED BY THE
DIVISION OF
OIL, GAS AND MINING
FOR RECORD ONLY

NAME (PLEASE PRINT) <u>Alvin R. (Al) Arlian</u>	TITLE <u>Landman - Regulatory Specialist</u>
SIGNATURE 	DATE <u>11/10/2005</u>

(This space for State use only)

RECEIVED
NOV 14 2005
DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER <u>CONFIDENTIAL</u>		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-47085
2. NAME OF OPERATOR: Enduring Resources, LLC		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: n/a
3. ADDRESS OF OPERATOR: 475 17th Street, Suite 1500 CITY Denver STATE CO ZIP 80202		7. UNIT or CA AGREEMENT NAME: n/a
4. LOCATION OF WELL FOOTAGES AT SURFACE: 639' FSL - 856' FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWSW 16 12S 21E S		8. WELL NAME and NUMBER: Buck Canyon 12-21-14-16 (13-16)
PHONE NUMBER: (303) 350-5719		9. API NUMBER: 4304737118
COUNTY: Uintah		10. FIELD AND POOL, OR WILDCAT: Wildcat
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: <u>8/25/2006</u>	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Request for APD Extension</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Enduring Resources, LLC respectfully request an extension to the expiration date of this Application for Permit to Drill

FROM: 10/5/2006
TO: 10/5/2007

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: 08-27-06
By: [Signature]

NAME (PLEASE PRINT) <u>Evette Bissett</u>	TITLE <u>Regulatory Compliance Assistant</u>
SIGNATURE <u>[Signature]</u>	DATE <u>8/25/2006</u>

(This space for State use only)

9129102
Dm

AUG 30 2006

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304737118
Well Name: Buck Canyon 12-21-14-16 (13-16)
Location: 639' FSL - 856' FWL, SWSW, Sec 16, T12S-R21E
Company Permit Issued to: Enduring Resources, LLC
Date Original Permit Issued: 10/5/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

Quetta Brant
Signature

8/25/2006
Date

Title: Regulatory Compliance Assistant

Representing: Enduring Resources, LLC

AUG 30 2006

CONFIDENTIAL

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-47085
2. NAME OF OPERATOR: Enduring Resources, LLC		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: n/a
3. ADDRESS OF OPERATOR: 475 17th Street, Suite 1500 CITY Denver STATE CO ZIP 80202		7. UNIT or CA AGREEMENT NAME: n/a
4. LOCATION OF WELL FOOTAGES AT SURFACE: 639' FSL - 856' FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWSW 16 12S 21E S		8. WELL NAME and NUMBER: Buck Canyon 12-21-14-16
PHONE NUMBER: (303) 350-5719		9. API NUMBER: 4304737118
COUNTY: Uintah		10. FIELD AND POOL, OR WILDCAT: Wildcat
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Request for APD Extension</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Enduring Resources, LLC respectfully request an extension to the expiration date of this Application for Permit to Drill

FROM: 9/27/2007
TO: 9/27/2008

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 09-27-07
By: [Signature]

9-28-07
RM

NAME (PLEASE PRINT) <u>Alvin R. (Al) Arlian</u>	TITLE <u>Landman - Regulatory Specialist</u>
SIGNATURE <u>[Signature]</u>	DATE <u>9/21/2007</u>

(This space for State use only)

RECEIVED
SEP 25 2007
DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304737118
Well Name: Buck Canyon 12-21-14-16
Location: 639' FSL - 856' FWL, SWSW, Sec 16, T12S-R21E
Company Permit Issued to: Enduring Resources, LLC
Date Original Permit Issued: 10/5/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No



Signature

9/21/2007

Date

Title: Landman - Regulatory Specialist

Representing: Enduring Resources, LLC

RECEIVED

SEP 25 2007

DIV. OF OIL, GAS & MINING



State of Utah
DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

October 23, 2008

Al Arlian
Enduring Resources, LLC
475 17TH Street, Suite 1500
Denver, CO 80202

43 047 37118
Buck Cyn 12-21-14-16
12S 2NE 16

Re: Rescind APDs

Dear Mr. Arlian:

Enclosed find the list of APDs that are being rescinded due to no drilling activity for more than the two year time frame. Therefore, approval to drill these wells is hereby rescinded, effective October 23, 2008.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject locations.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
SITLA, Ed Bonner



Buck Canyon 12-21-23-16
Buck Canyon 12-21-14-16
Buck Canyon 12-21-34-16
Asphalt Wash 11-24-34-16
Asphalt Wash 11-24-21-16
Asphalt Wash 11-24-13-16
Asphalt Wash 11-24-32-16
Asphalt Wash 11-24-24-16
Asphalt Wash 11-24-11-16
Archy Bench 12-23-31-16
Bonanza 9-25-12-30
Bonanza 9-25-22-30
Bonanza 9-25-23-30
Bonanza 9-25-14-20
Southam Canyon 9-24-44-36 (FEE)
Rainbow 12-24-41-16
Rainbow 12-24-12-16
Little Pack 12-20-41-16
Little Pack 12-20-32-32