

September 26, 2005

Fluid Minerals Group
Bureau of Land Management
Vernal Field Office
170 South 500 East
Vernal, Utah 84078

RE: Application for Permit to Drill—Dominion Exploration & Production, Inc.
KC 6-33E, 2,018' FNL & 2,157' FWL, SE/4 NW/4,
Section 33, T10S, R19E, SLB&M, Uintah County, Utah

Dear Fluid Minerals Group:

On behalf of Dominion Exploration & Production, Inc. (Dominion), Buys & Associates, Inc. respectfully submits the enclosed original and two copies of the *Application for Permit to Drill (APD)* for the above referenced well. Included with the APD is the following supplemental information:

- Exhibit "A" - Survey plats, layouts and photos of the proposed well site;
- Exhibit "B" - Proposed location maps with access and utility corridors;
- Exhibit "C" - Production site layout;
- Exhibit "D" - Drilling Plan;
- Exhibit "E" - Surface Use Plan;
- Exhibit "F" - Typical BOP and Choke Manifold diagram.

Please accept this letter as Dominion's, written request for confidential treatment of all information contained in and pertaining to this application.

Thank you very much for your timely consideration of this application. Please feel free to contact myself or Carla Christian of Dominion at 405-749-5263 if you have any questions or need additional information.

Sincerely,

Don Hamilton
Don Hamilton
Agent for Dominion

cc: Sheri Wysong, Vernal BLM
Diana Whitney, Division of Oil, Gas and Mining
Carla Christian, Dominion

RECEIVED

SEP 29 2005

DIV. OF OIL, GAS & MINING **FILE COPY**

CONFIDENTIAL

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0137
Expires March 31, 2007

5. Lease Serial No. UTU-49522	
6. If Indian, Allottee or Tribe Name N/A	
7. If Unit or CA Agreement, Name and No. N/A	
8. Lease Name and Well No. KC 6-33E	
9. API Well No. 43-047-37195	
1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER	10. Field and Pool, or Exploratory Natural Buttes
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone	11. Sec., T. R. M. or Blk. and Survey or Area Section 33, T10S, R19E, SLB&M
2. Name of Operator Dominion Exploration & Production, Inc.	12. County or Parish Uintah
3a. Address 14000 Quail Springs Parkway, Suite 600 Oklahoma City, OK 73134	13. State UT
3b. Phone No. (include area code) 405-749-5263	14. Distance in miles and direction from nearest town or post office* 13.94 miles southwest of Ouray, Utah
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface 2,018' FNL & 2,157' FWL, SE/4 NW/4, 603622X At proposed prod. zone 2,018' FNL & 2,157' FWL, SE/4 NW/4, 4417735Y	15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 2,018'
16. No. of acres in lease 560 acres	17. Spacing Unit dedicated to this well 40 acres
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 1,425'	19. Proposed Depth 9,500'
20. BLM/BIA Bond No. on file 76S 63050 0330	21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5,312' GR
22. Approximate date work will start* 01/01/2006	23. Estimated duration 14 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the BLM.

25. Signature Don Hamilton	Name (Printed/Typed) Don Hamilton	Date 09/26/2005
--------------------------------------	---	---------------------------

Title Agent for Dominion

Approved by (Signature) Bradley G. Hill	Name (Printed/Typed) BRADLEY G. HILL	Date 09-29-05
---	--	-------------------------


Title ENVIRONMENTAL SCIENTIST III

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)

**Federal Approval of this
Action is Necessary**

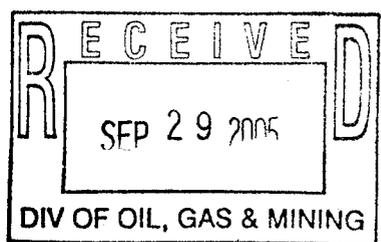


CONFIDENTIAL

T10S, R19E, S.L.B.&M.

DOMINION EXPLR. & PROD., INC.

Well location, KINGS CANYON #6-33E, located as shown in the SE 1/4 NW 1/4 of Section 33, T10S, R19E, S.L.B.&M. Uintah County, Utah.

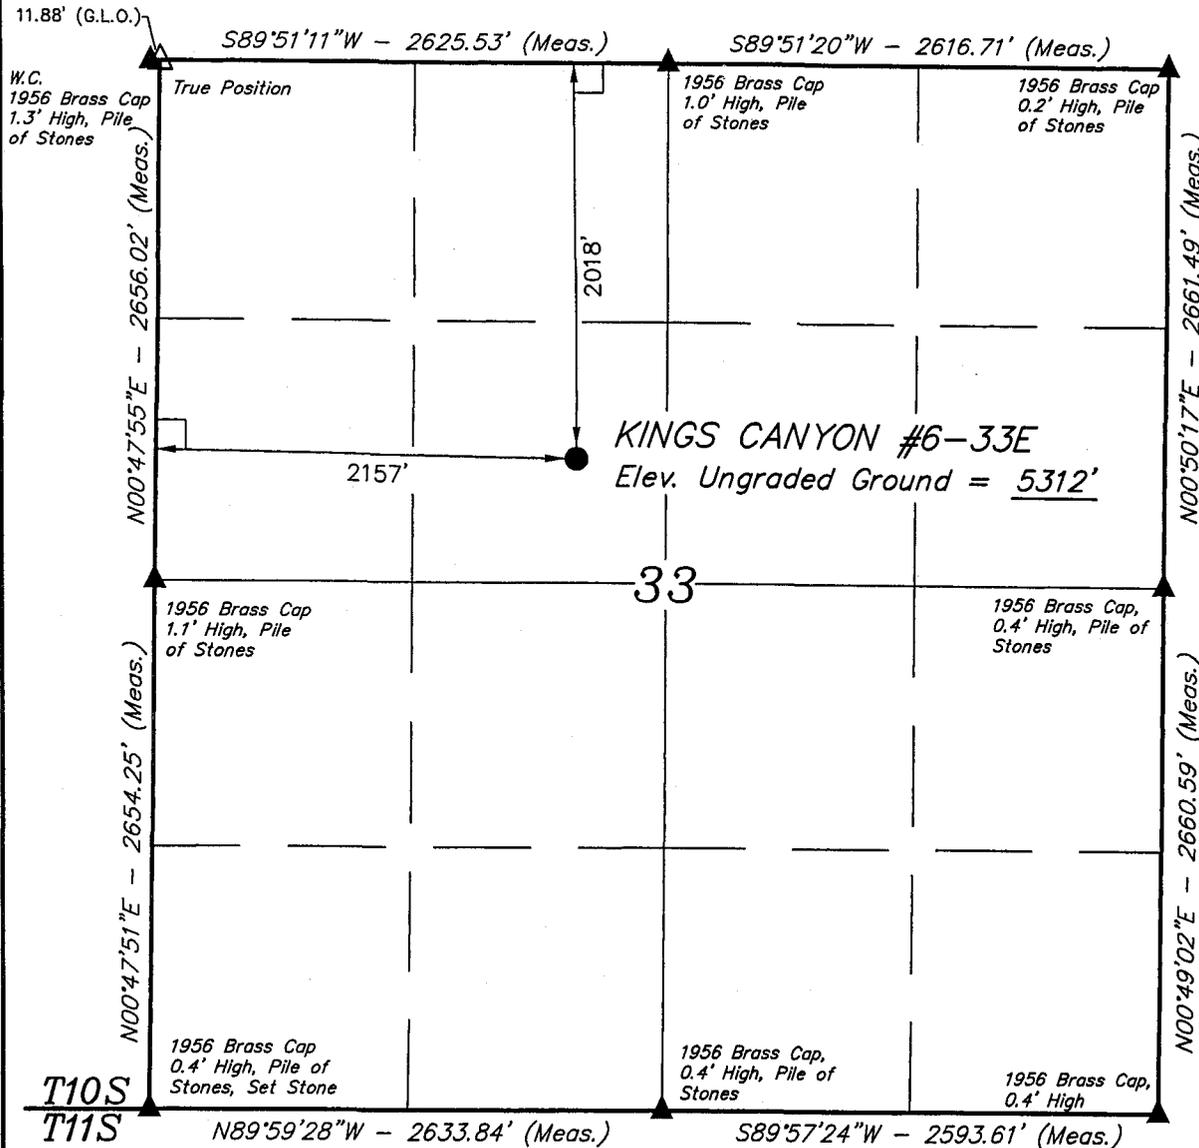


BASIS OF ELEVATION

SPOT ELEVATION AT THE SOUTHWEST CORNER OF SECTION 20, T10S, R20E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN. NW QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5251 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

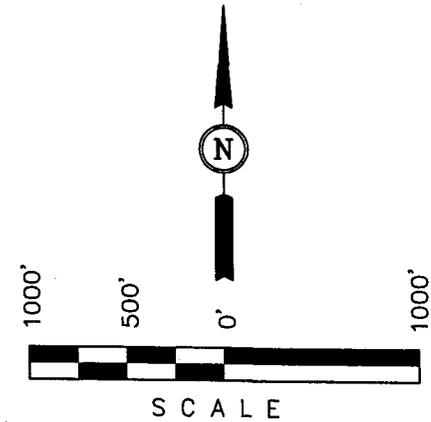

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Robert H. Ray
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 761319
 STATE OF UTAH

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)
 LATITUDE = 39°54'19.02" (39.905283)
 LONGITUDE = 109°47'18.36" (109.788433)
 (NAD 27)
 LATITUDE = 39°54'19.15" (39.905319)
 LONGITUDE = 109°47'15.85" (109.787736)

UINTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 05-25-05	DATE DRAWN: 06-03-05
PARTY B.B. J.F. D.R.B.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE DOMINION EXPLR. & PROD., INC.	

DRILLING PLAN

APPROVAL OF OPERATIONS

Attachment for Permit to Drill

Name of Operator: Dominion Exploration & Production
Address: 14000 Quail Springs Parkway, Suite 600
Oklahoma City, OK 73134
Well Location: Kings Canyon 6-33E
2018' FNL & 2157' FWL
Section 33-10S-19E
Uintah County, UT

1. GEOLOGIC SURFACE FORMATION Uintah

2. ESTIMATED DEPTHS OF IMPORTANT GEOLOGIC MARKERS

<u>Formation</u>	<u>Depth</u>
Wasatch Tongue	3,830'
Green River Tongue	4,180'
Wasatch	4,320'
Chapita Wells	5,200'
Uteland Buttes	6,270'
Mesaverde	7,170'

3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS

<u>Formation</u>	<u>Depth</u>	<u>Type</u>
Wasatch Tongue	3,830'	Oil
Green River Tongue	4,180'	Oil
Wasatch	4,320'	Gas
Chapita Wells	5,200'	Gas
Uteland Buttes	6,270'	Gas
Mesaverde	7,170'	Gas

4. PROPOSED CASING PROGRAM

All casing used to drill this well will be new casing.

<u>Type</u>	<u>Size</u>	<u>Weight</u>	<u>Grade</u>	<u>Conn.</u>	<u>Top</u>	<u>Bottom</u>	<u>Hole</u>
Surface	8-5/8"	32.0 ppf	J-55	STC	0'	2,000'	12-1/4"
Production	5-1/2"	17.0 ppf	MAV-80	LTC	0'	9,500'	7-7/8"

Note: The drilled depth of the surface hole and the setting depth of the surface casing may vary from 1,700' to 2,000'. Should a lost circulation zone be encountered while drilling, casing will be set approximately 300' below the lost circulation zone. If no lost circulation zone is encountered, casing to be set at 2,000'±.

CONFIDENTIAL

DRILLING PLAN

APPROVAL OF OPERATIONS

5. OPERATOR'S MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL

Surface hole: No BOPE will be utilized. Air foam mist, rotating head and diverter system will be utilized.

Production hole: Prior to drilling out the surface casing shoe, 3,000 psi or greater BOP equipment will be installed. The pipe rams will be operated at least once per day from intermediate casing to total depth. The blind rams will be tested once per day from intermediate casing to total depth if operations permit.

A diagram of the planned BOP equipment for normal drilling operations in this area is attached. As denoted there will be two valves and one check valve on the kill line, two valves on the choke line, and two adjustable chokes on the manifold system. The BOP "stack" will consist of two BOP rams (1 pipe, 1 blind) and one annular type preventer, all rated to a minimum of 3,000 psi working pressure.

The BOP equipment will be pressure tested prior to drilling below the intermediate casing shoe. All test pressures will be maintained for fifteen (15) minutes without any significant pressure decrease. Clear water will be circulated into the BOP stack and lines prior to pressure testing. The following test pressures will be used as a minimum for various equipment items.

1. Annular BOP	1,500 psi
2. Ram type BOP	3,000 psi
3. Kill line valves	3,000 psi
4. Choke line valves and choke manifold valves	3,000 psi
5. Chokes	3,000 psi
6. Casing, casinghead & weld	1,500 psi
7. Upper kelly cock and safety valve	3,000 psi
8. Dart valve	3,000 psi

6. MUD SYSTEMS

- An air or an air/mist system may be used to drill the surface hole until water influx becomes too great.
- KCL mud system will be used to drill well.

<u>Depths</u>	<u>Mud Weight (ppg)</u>	<u>Mud System</u>
0' - 2,000'	8.4	Air foam mist, rotating head and diverter
2,000' - 9,500'	8.6	Fresh water/2% KCL/KCL mud system

7. BLOOIE LINE

- An automatic igniter will not be installed on blooie line. The blooie will have a constant ignition source.
- A "target tee" connection will be installed on blooie line for 90° change of directions for abrasion resistance.
- "Target tee" connections will be a minimum of 50' from wellhead.
- The blooie line discharge will be a minimum of 100' from the wellhead.

8. AUXILIARY EQUIPMENT TO BE USED

- a. Kelly cock.
- b. Full opening valve with drill pipe connection will be kept on floor. Valve will be used when the kelly is not in string.

9. TESTING, LOGGING, AND CORING PROGRAMS TO BE FOLLOWED

- A drillstem test in the Wasatch Tongue is possible.
- One electric line wire-log will be run from total depth to surface casing.
- The gamma ray will be left on to record from total depth to surface casing.
- Other log curves (resistivities, porosity, and caliper) will record from total depth to surface casing.
- A dipmeter, percussion cores, or rotary cores may be run over selected intervals.

10. ANTICIPATED ABNORMAL PRESSURES OR TEMPERATURES EXPECTED

- Expected BHP 1,500-2,000 psi (lower than normal pressure gradient).
- No abnormal temperature or pressures are anticipated.
- The formations to be penetrated do not contain known H₂S gas.

CONFIDENTIAL

DRILLING PLAN

APPROVAL OF OPERATIONS

11. WATER SUPPLY

- No water pipelines will be laid for this well.
- No water well will be drilled for this well.
- Drilling water for this will be hauled on the road(s) shown in Attachment No. 3.
- Water will be hauled from: Water Permit # 43-10447 Section 9, Township 8 South, Range 20 East

12. CEMENT SYSTEMS

a. Surface Cement:

- Drill 12-1/4" hole to 2,000'±, run and cement 8-5/8" to surface (depth to vary based on depth of lost circulation zone).
- Pump 20 bbls lightly weighted water spacer followed by 5 bbls fresh water. Displace with any available water.
- Casing to be run with: a) guide shoe b) insert float c) three (3) centralizers, one on each of first 3 joints d) stop ring for plug two joints off bottom e) bottom three joints thread locked f) pump job with bottom plug only.
- Cement the casing annulus to surface. Top out jobs to be performed if needed. Depending to depth of top of cement in the annulus, a 1" tubing string may or may not be utilized.

Type	Sacks	Interval	Density	Yield	Hole Volume	Cement Volume	Excess
Lead	252	0'-1,500'	11.0 ppg	3.82 CFS	619 CF	835 CF	35%
Tail	219	1,500'-2,000'	15.6 ppg	1.18 CFS	220 CF	297 CF	35%
Top Out	100	0'-200'	15.6 ppg	1.18 CFS	95 CF	118 CF	24% (if required)

Lead Mix: Premium Plus V blend. Blend includes Class "G" cement, gel, salt, gilsonite.
 Slurry yield: 3.82 cf/sack Slurry weight: 11.00 #/gal.
 Water requirement: 22.95 gal/sack

Tail Mix: Class "G" Cement, 1/4 lb/sk Cellophane Flakes + 2% bwoc Calcium Chloride + 44.3% fresh water.
 Slurry yield: 1.18 cf/sack Slurry weight: 15.60 #/gal.
 Water requirement: 5.2 gal/sack

Top Out: Class "G" Cement, 1/4 lb/sk Cellophane Flakes + 2% bwoc Calcium Chloride + 44.3% fresh water.
 Slurry yield: 1.18 cf/sack Slurry weight: 15.60 #/gal.
 Water requirement: 5.2 gal/sack

c. Production Casing Cement:

- Drill 7-7/8" hole to 9,500'±, run and cement 5 1/2"
- Cement interface is at 4,000', which is typically 500'-1,000' above shallowest pay.
- Pump 20 bbl Mud Clean II unweighted spacer, followed by 20 Bbls fresh H2O spacer.
- Displace with 3% KCL.

Type	Sacks	Interval	Density	Yield	Hole Volume	Cement Volume	Excess
Lead	160	3,700'-4,700'	11.5 ppg	3.12 CFS	175 CF	350 CF	100%
Tail	435	4,700'-9,500'	13.0 ppg	1.75 CFS	473 CF	946 CF	100%

Note: A caliper log will be ran to determine cement volume requirements.

Lead Mix: Halliburton Prem Plus V blend. Blend includes Class "C" cement, gel, salt, gilsonite, EX-1 and HR-7.
 Slurry yield: 3.12 cf/sack Slurry weight: 11.60 #/gal.
 Water requirement: 17.71 gal/sack
 Compressives @ 130°F: 157 psi after 24 hours

Tail Mix: Halliburton HLC blend (Prem Plus V/JB flyash). Blend includes Class "G" cement, KCl, EX-1, Halad 322, & HR-5.
 Slurry yield: 1.75 cf/sack Slurry weight: 13.00 #/gal.
 Water requirement: 9.09 gal/sack
 Compressives @ 165°F: 905 psi after 24 hours

13. ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS

Starting Date: February 1, 2006
 Duration: 14 Days

SURFACE USE PLAN

CONDITIONS OF APPROVAL

Attachment for Permit to Drill

Name of Operator: Dominion Exploration & Production
Address: 14000 Quail Springs Parkway, Suite 600
Oklahoma City, OK 73134
Well Location: Kings Canyon 6-33E
2018' FNL & 2157' FWL
Section 33-10S-19E
Uintah County, UT

The dirt contractor will be provided with an approved copy of the surface use plan of operations before initiating construction.

The federal onsite inspection for the referenced well was conducted on Tuesday, September 6, 2005 at approximately 11:30 pm. In attendance at the onsite inspection were the following individuals:

Ken Secrest	Foreman	Dominion E & P, Inc.
Karl Wright	Nat. Res. Prot. Spec.	Bureau of Land Management – Vernal
Amy Torres	Biologist	Bureau of Land Management – Vernal
Brandon Bowthorpe	Surveyor	Uintah Engineering and Land Surveying
Jason Robins	Surveyor Helper	Uintah Engineering and Land Surveying
Bill McClure	Foreman	LaRose Construction

1. Existing Roads:

- a. The proposed well site is located approximately 13.94 miles southwest of Ouray, UT.
- b. Directions to the proposed well site have been attached at the end of Exhibit B.
- c. The use of roads under State and County Road Department maintenance are necessary to access the Kings Canyon area. However, an encroachment permit is not anticipated since no upgrades to the State or County Road system are proposed at this time.
- d. All existing roads will be maintained and kept in good repair during all phases of operation.
- e. Vehicle operators will obey posted speed restrictions and observe safe speeds commensurate with road and weather conditions.
- f. Since no improvements are anticipated to the State, County, Tribal or BLM access roads no topsoil striping will occur.
- g. An off-lease federal Right-of-Way is needed for the access road and utility corridor since both are located outside of the federal lease area and existing unit boundaries. This application has previously been submitted directly to the Vernal Realty office.

2. Planned Access Roads:

- a. From the proposed KC 11-33E access road an access is proposed trending northeast approximately 0.25 miles to the proposed well site. The access consists of entirely new disturbance and crosses no significant drainages. A road design plan is not anticipated at this time.
- b. The proposed access road will consist of a 24' travel surface within a 30' disturbed area.
- c. BLM approval to construct and utilize the proposed access road is requested with this application.
- d. A maximum grade of 10% will be maintained throughout the project with minor cuts and fills required to access the well.
- e. No turnouts are proposed since the access road is only 0.25 miles long and adequate site distance exists in all directions.
- f. No culverts or low water crossings are anticipated. Adequate drainage structures will be incorporated into the road.
- g. No surfacing material will come from federal or Indian lands.
- h. No gates or cattle guards are anticipated at this time.
- i. Surface disturbance and vehicular travel will be limited to the approved location access road.
- j. All access roads and surface disturbing activities will conform to the standards outlined in the Bureau of Land Management and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development. (1989).
- k. The operator will be responsible for all maintenance of the access road including drainage structures.

3. Location of Existing Wells:

- a. Exhibit B has a map reflecting these wells within a one mile radius of the proposed well.

4. Location of Production Facilities:

- a. All permanent structures will be painted a flat, non-reflective Desert Brown to match the standard environmental colors. All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) may be excluded.
- b. Site security guidelines identified in 43 CFR 3163.7-5 and Onshore Oil and Gas Order No. 3 will be adhered to.
- c. A gas meter run will be constructed and located on lease within 500 feet of the wellhead. Meter runs will be housed and/or fenced. All gas production and measurement shall comply with the provisions of 43 CFR 3162. 7-3, Onshore Oil and Gas Order No. 5, and American Gas Association (AGA) Report No. 3.

- d. A tank battery will be constructed on this lease, it will be surrounded by a dike of sufficient capacity to contain the storage capacity of the largest tank. All loading lines and valves will be placed inside the berm surrounding the tank battery. All liquid hydrocarbons production and measurement shall conform to the provisions of 43 CFR 3162.7-3 and Onshore Oil and Gas Order No. 4 and Onshore Oil and Gas Order No. 5 for natural gas production and measurement.
- e. Any necessary pits will be properly fenced to prevent any wildlife and livestock entry.
- f. All access roads will be maintained as necessary to prevent erosion and accommodate year-round traffic. The road will be maintained in a safe useable condition.
- g. The site will require periodic maintenance to ensure that drainages are kept open and free of debris, ice, and snow, and that surfaces are properly treated to reduce erosion, fugitive dust, and impacts to adjacent areas.
- h. A gas pipeline is associated with this application and is being applied for at this time. The proposed gas pipeline corridor will leave the south side of the well site and traverse 1,440' southwest to the proposed pipeline corridor that will service the KC 11-33E.
- i. The line will be buried unless conditions exist during construction require the pipeline to be surface laid.
- j. The new gas pipeline will be a 8" or less steel line within a 50' wide utility corridor. The use of the proposed well site and access roads will facilitate the staging of the pipeline construction. A new pipeline length of approximately 1,440' is associated with this well.
- k. Dominion intends on installing the pipeline below the surface by welding many joints into long lengths, dragging the long lengths into position and then completing a final welding pass to join the long lengths together. Dominion intends on connecting the pipeline together utilizing conventional welding technology.

5. Location and Type of Water Supply:

- a. The location and type of water supply has been addressed as number 11 within the previous drilling plan information.

6. Source of Construction Material:

- a. The use of materials will conform to 43 CFR 3610.2-3.
- b. No construction materials will be removed from Ute Tribal or BLM lands.
- c. If any gravel is used, it will be obtained from a state approved gravel pit.

7. Methods of Handling Waste Disposal:

- a. All wastes associated with this application will be contained and disposed of utilizing approved facilities.
- b. Drill cuttings will be contained and buried on site.
- c. The reserve pit will be located outboard of the location and along the east side of the pad.

- d. The reserve pit will be constructed so as not to leak, break, or allow any discharge.
- e. The reserve pit will be lined with 12 mil minimum thickness plastic nylon reinforced liner material. The liner will overlay a felt liner pad only if rock is encountered during excavation. The pit liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash, scrap pipe, etc., that could puncture the liner will be disposed of in the pit. Pit walls will be sloped no greater than 2:1. A minimum 2-foot freeboard will be maintained in the pit at all times during the drilling and completion operation.
- f. The reserve pit has been located in cut material. Three sides of the reserve pit will be fenced before drilling starts. The fourth side will be fenced as soon as drilling is completed, and shall remain until the pit is dry. After the reserve pit has dried, all areas not needed for production will be rehabilitated.
- g. No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completion of the well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completion of the well.
- h. Trash will be contained in a trash cage and hauled away to an approved disposal site as necessary but no later than at the completion of drilling operations. The contents of the trash container will be hauled off periodically to the approved Uintah County Landfill near Vernal, Utah.
- i. Produced fluids from the well other than water will be produced into a test tank until such time as construction of production facilities is completed. Any spills of oil, gas, salt water or other produced fluids will be cleaned up and removed.
- j. After initial clean-up, a 400 bbl tank will be installed to contain produced waste water. This water will be transported from the tank to an approved Dominion disposal well for disposal.
- k. **Produced water from the production well will be disposed of at the RBU 13-11F or RBU 16-19F disposal wells in accordance with Onshore Order #7.**
- l. Any salts and/or chemicals, which are an integral part of the drilling system, will be disposed of in the same manner as the drilling fluid.
- m. Sanitary facilities will be on site at all times during operations. Sewage will be placed in a portable chemical toilet and the toilet replaced periodically utilizing a licensed contractor to transport by truck the portable chemical toilet so that its contents can be delivered to the Vernal Wastewater Treatment Facility in accordance with state and county regulations.

8. Ancillary Facilities:

- a. Garbage Containers and Portable Toilets are the only ancillary facilities proposed in this application.

9. Well Site Layout: (See Exhibit B)

- a. The well will be properly identified in accordance with 43 CFR 3162.6.
- b. Access to the well pad will be from the south.

- c. The pad and road designs are consistent with BLM specification
- d. A pre-construction meeting with responsible company representative, contractors, and the BLM will be conducted at the project site prior to commencement of surface-disturbing activities. The pad and road will be construction-staked prior to this meeting.
- e. The pad has been staked at its maximum size of 355' X 200'; however it will be constructed smaller if possible, depending upon rig availability. Should the layout change, this application will be amended and approved utilizing a sundry notice.
- f. All surface disturbing activities, will be supervised by a qualified, responsible company representative who is aware of the terms and conditions of the APD and specifications in the approved plans.
- g. All cut and fill slopes will be such that stability can be maintained for the life of the activity.
- h. Diversion ditches will be constructed as shown around the well site to prevent surface waters from entering the well site area.
- i. The site surface will be graded to drain away from the pit to avoid pit spillage during large storm events.
- j. The stockpiled topsoil (first 6 inches or maximum available) will be stored in a windrow on the uphill side of the location to prevent any possible contamination. All topsoil will be stockpiled for reclamation in such a way as to prevent soil loss and contamination.
- k. Pits will remain fenced until site cleanup.
- l. The blooie line will be located at least 100 feet from the well head.
- m. Water injection may be implemented if necessary to minimize the amount of fugitive dust.

10. Plans for Restoration of the Surface:

- a. Site reclamation for a producing well will be accomplished for portions of the site not required for the continued operation of the well.
- b. The Operator will control noxious weeds along access road use authorizations, pipeline route authorizations, well sites, or other applicable facilities by spraying or mechanical removal. A list of noxious weeds may be obtained from the BLM or the appropriate County Extension Office. On and BLM administered land, it is required that a Pesticide Use Proposal be submitted and approved prior to the application of herbicides, pesticides or possibly hazardous chemicals.
- c. Upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1. Once the reserve pit is dry, the plastic nylon reinforced liner shall be torn and perforated before backfilling of the reserve pit. The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours.
- d. The cut and fill slopes and all other disturbed areas not needed for the production operation will be top soiled and re-vegetated. The stockpiled topsoil will be evenly distributed over the disturbed area.
- e. Prior to reseeding the site, all disturbed areas, including the access road, will be scarified and left with a rough surface. The site will then be seeded and/or planted as prescribed by the BLM. The BLM recommended seed mix will be detailed within their approval documents.

11. Surface and Mineral Ownership:

- a. Surface Ownership – Federal under the management of the Bureau of Land Management - Vernal Field Office, 170 South 500 East, Vernal, Utah 84078; 435-781-4400.
- b. Mineral Ownership – Federal under the management of the Bureau of Land Management - Vernal Field Office, 170 South 500 East, Vernal, Utah 84078; 435-781-4400.

12. Other Information:

- a. AIA Archaeological has conducted a Class III archeological survey. A copy of the report has been submitted under separate cover to the appropriate agencies by AIA Archaeological.
- b. Alden Hamblin has conducted a paleontological survey. A copy of the report has been submitted under separate cover to the appropriate agencies by Alden Hamblin.
- c. Our understanding of the results of the onsite inspection are:
 - a. No Threatened and Endangered flora and fauna species were found during the onsite inspection.
 - b. A federal SF-299 ROW application has previously been submitted for the off-lease access road and pipeline corridor and is pending approval at this time.
 - c. A burrowing owl timing limitation will be present within the approval documents.
 - d. A golden eagle timing limitation will be present within the approval documents.

13. Operator's Representative and Certification

<u>Title</u>	<u>Name</u>	<u>Office Phone</u>
Company Representative (Roosevelt)	Ken Secrest	1-435-722-4521
Company Representative (Oklahoma)	Carla Christian	1-405-749-5263
Agent for Dominion	Don Hamilton	1-435-637-4075

Certification:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exists; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Dominion Exploration & Production, Inc. and its contractors and subcontractors in conformity with this APD package and the terms and conditions under which it is approved. I also certify responsibility for the operations conducted on that portion of the leased lands associated with this application, with bond coverage being provided under Dominion's BLM bond. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

Signature: Don Hamilton Date: 9-26-05

DOMINION EXPLR. & PROD., INC.
KINGS CANYON #6-33E
SECTION 33, T10S, R19E, S.L.B.&M.


PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 9.1 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 2.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE WEST; TURN RIGHT AND PROCEED IN A WESTERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 0.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTH; TURN RIGHT AND PROCEED IN A NORTHERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 12.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING TWO-TRACK ROAD TO THE SOUTHWEST; TURN RIGHT AND PROCEED IN A SOUTHWESTERLY, THEN NORTHERLY DIRECTION APPROXIMATELY 5.2 MILES TO THE BEGINNING OF THE PROPOSED ACCESS FOR THE #11-33E TO THE NORTHEAST; FOLLOW ROAD FLAGS IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.4 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTHEAST; FOLLOW ROAD FLAGS IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.25 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 62.55 MILES.


DOMINION EXPLR. & PROD., INC.

LOCATION LAYOUT FOR

**KINGS CANYON #6-33E
SECTION 33, T10S, R19E, S.L.B.&M.
2018' FNL 2157' FWL**



SCALE: 1" = 50'
DATE: 06-03-05
Drawn By: D.R.B.

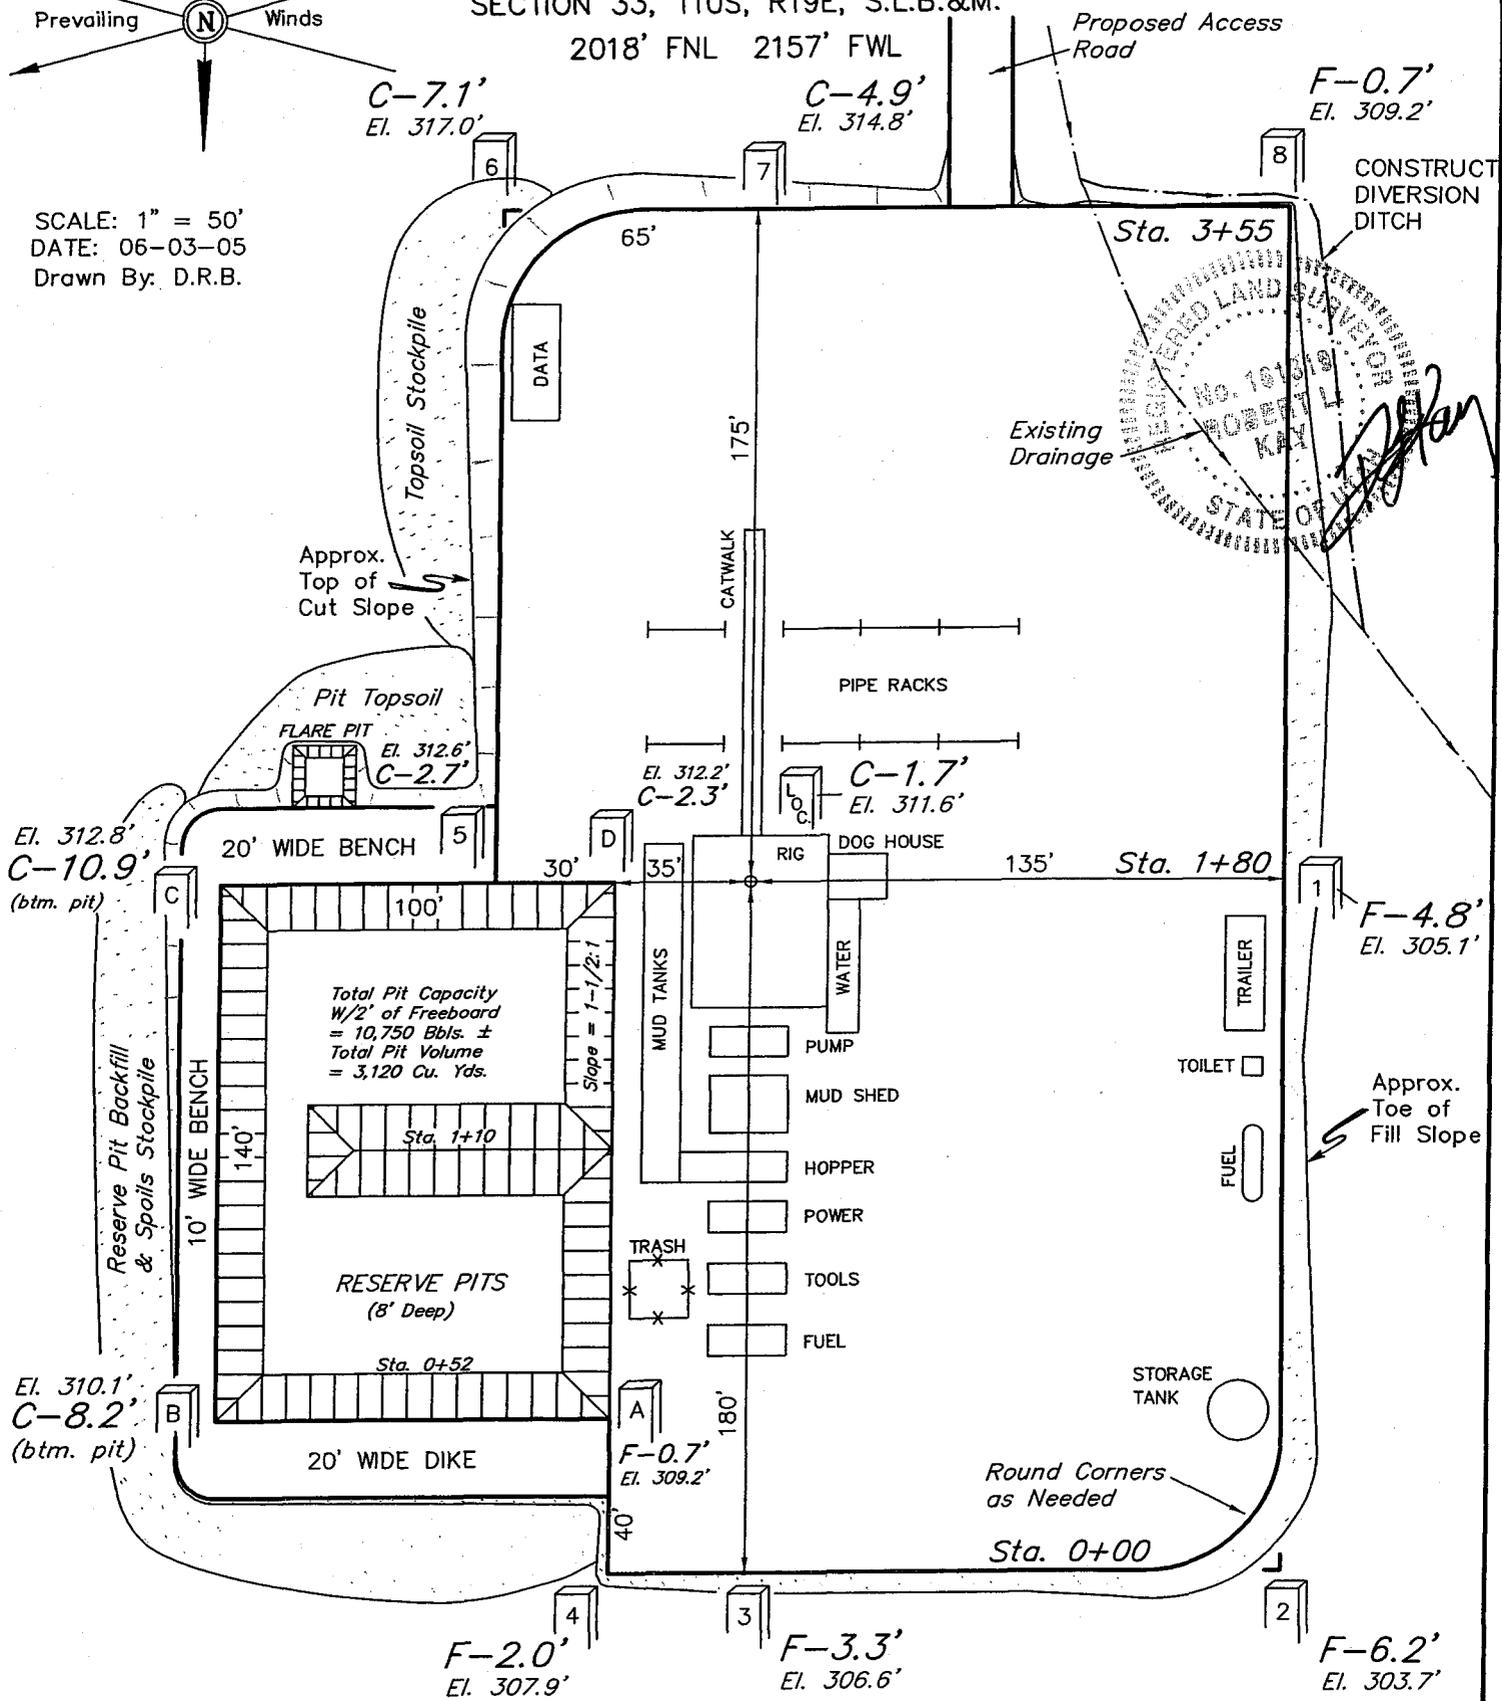

Elev. Ungraded Ground at Location Stake = 5311.6'
Elev. Graded Ground at Location Stake = 5309.9'

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

DOMINION EXPLR. & PROD., INC.





TYPICAL CROSS SECTIONS FOR

**KINGS CANYON #6-33E
SECTION 33, T10S, R19E, S.L.B.&M.
2018' FNL 2157' FWL**



1" = 20'
X-Section Scale
1" = 50'

DATE: 06-03-05
Drawn By: D.R.B.

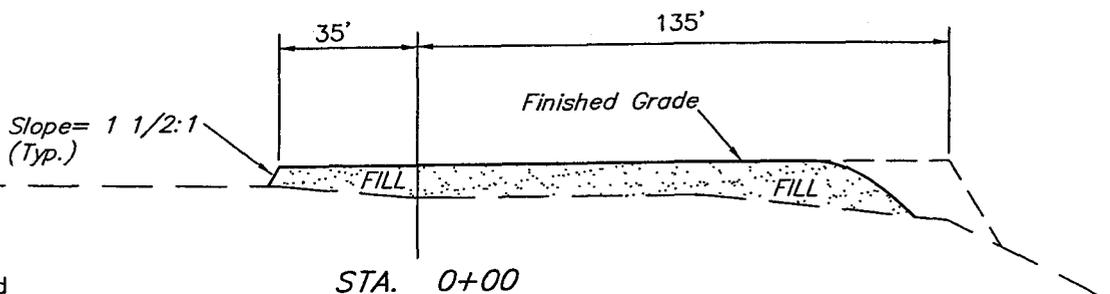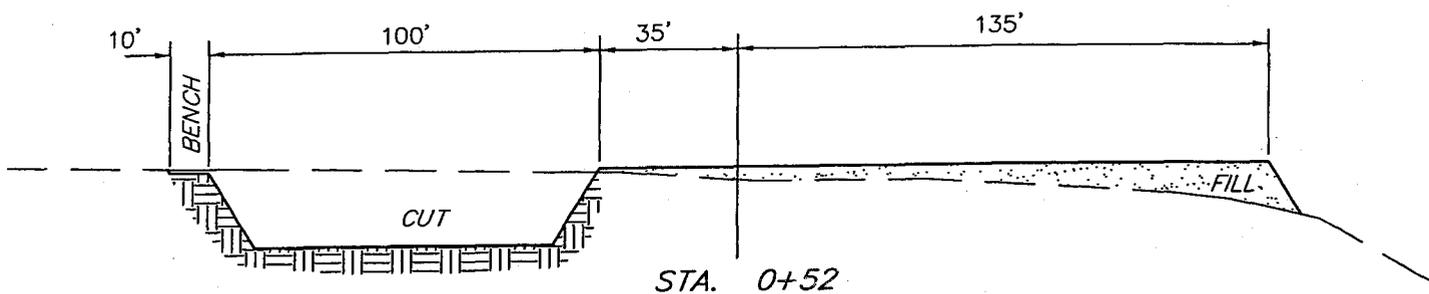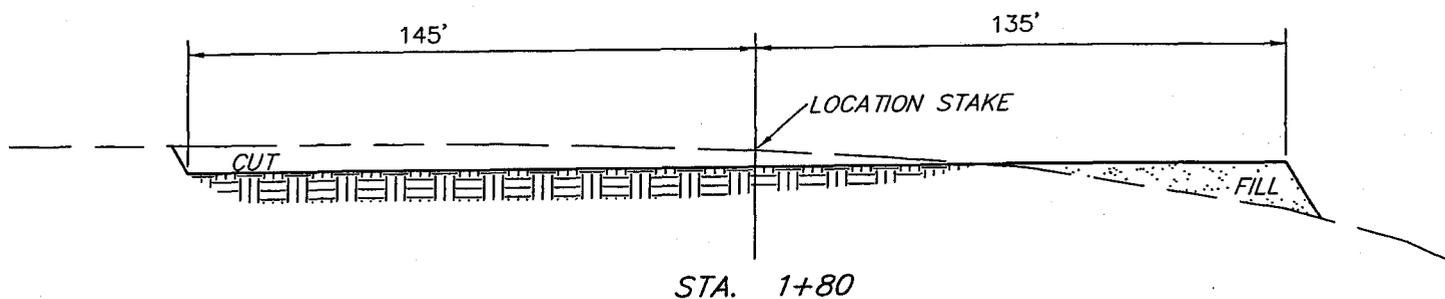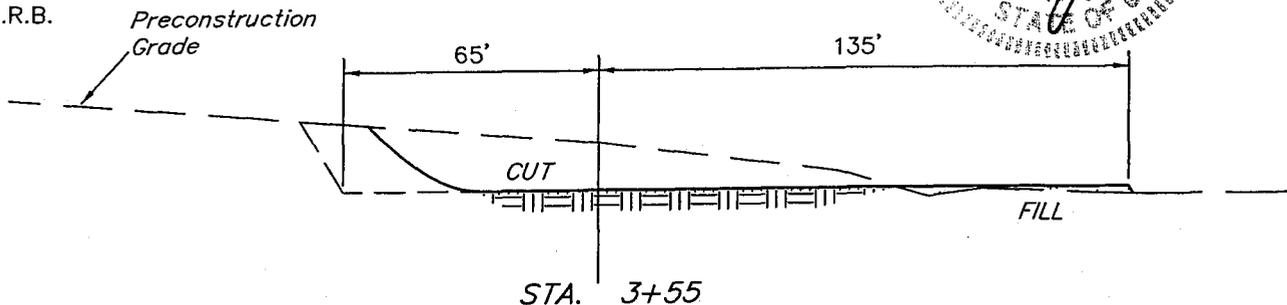

NOTE:
Topsoil should not be Stripped Below Finished Grade on Substructure Area.

* NOTE:
FILL QUANTITY INCLUDES 5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,740 Cu. Yds.
Remaining Location	= 5,940 Cu. Yds.
TOTAL CUT	= 7,680 CU.YDS.
FILL	= 4,380 CU.YDS.

EXCESS MATERIAL	= 3,300 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,300 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

DOMINION EXPLR. & PROD., INC.

KINGS CANYON #6-33E
LOCATED IN UINTAH COUNTY, UTAH
SECTION 33, 10S, R19E, S.L.B.&M.



PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: WESTERLY

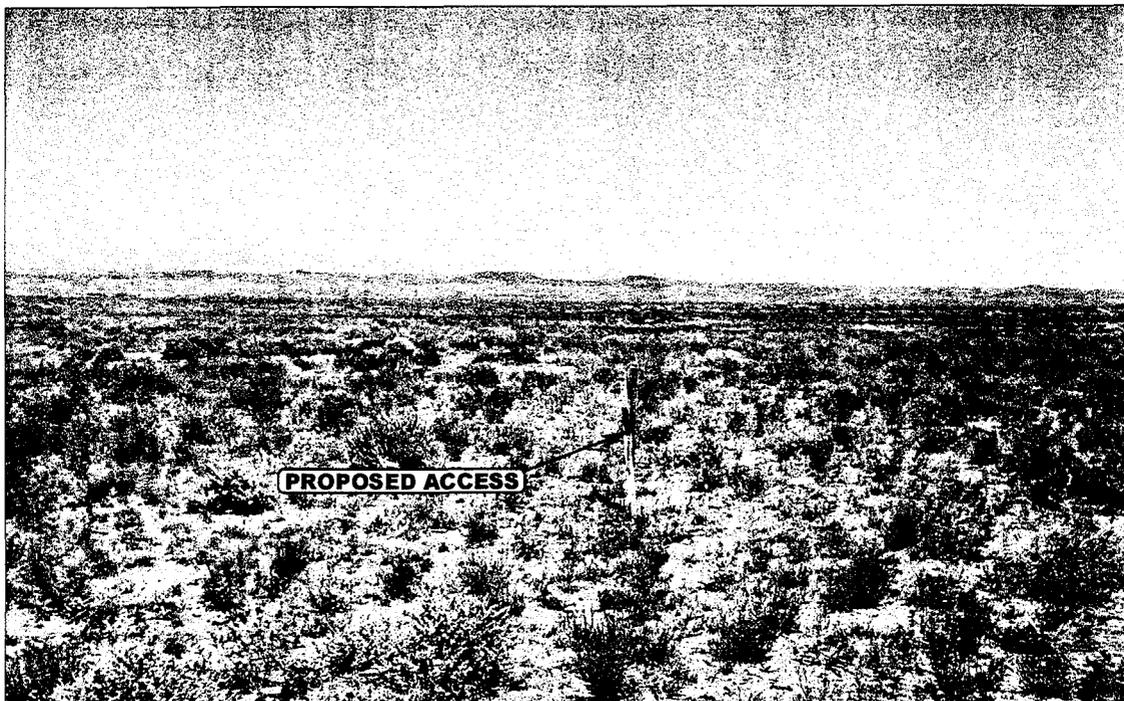


PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS


CAMERA ANGLE: NORTHEASTERLY



- Since 1964 -

E&L S Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS	06	01	05	PHOTO
	MONTH	DAY	YEAR	
TAKEN BY: J.F.	DRAWN BY: C.P.		REVISED: 00-00-00	

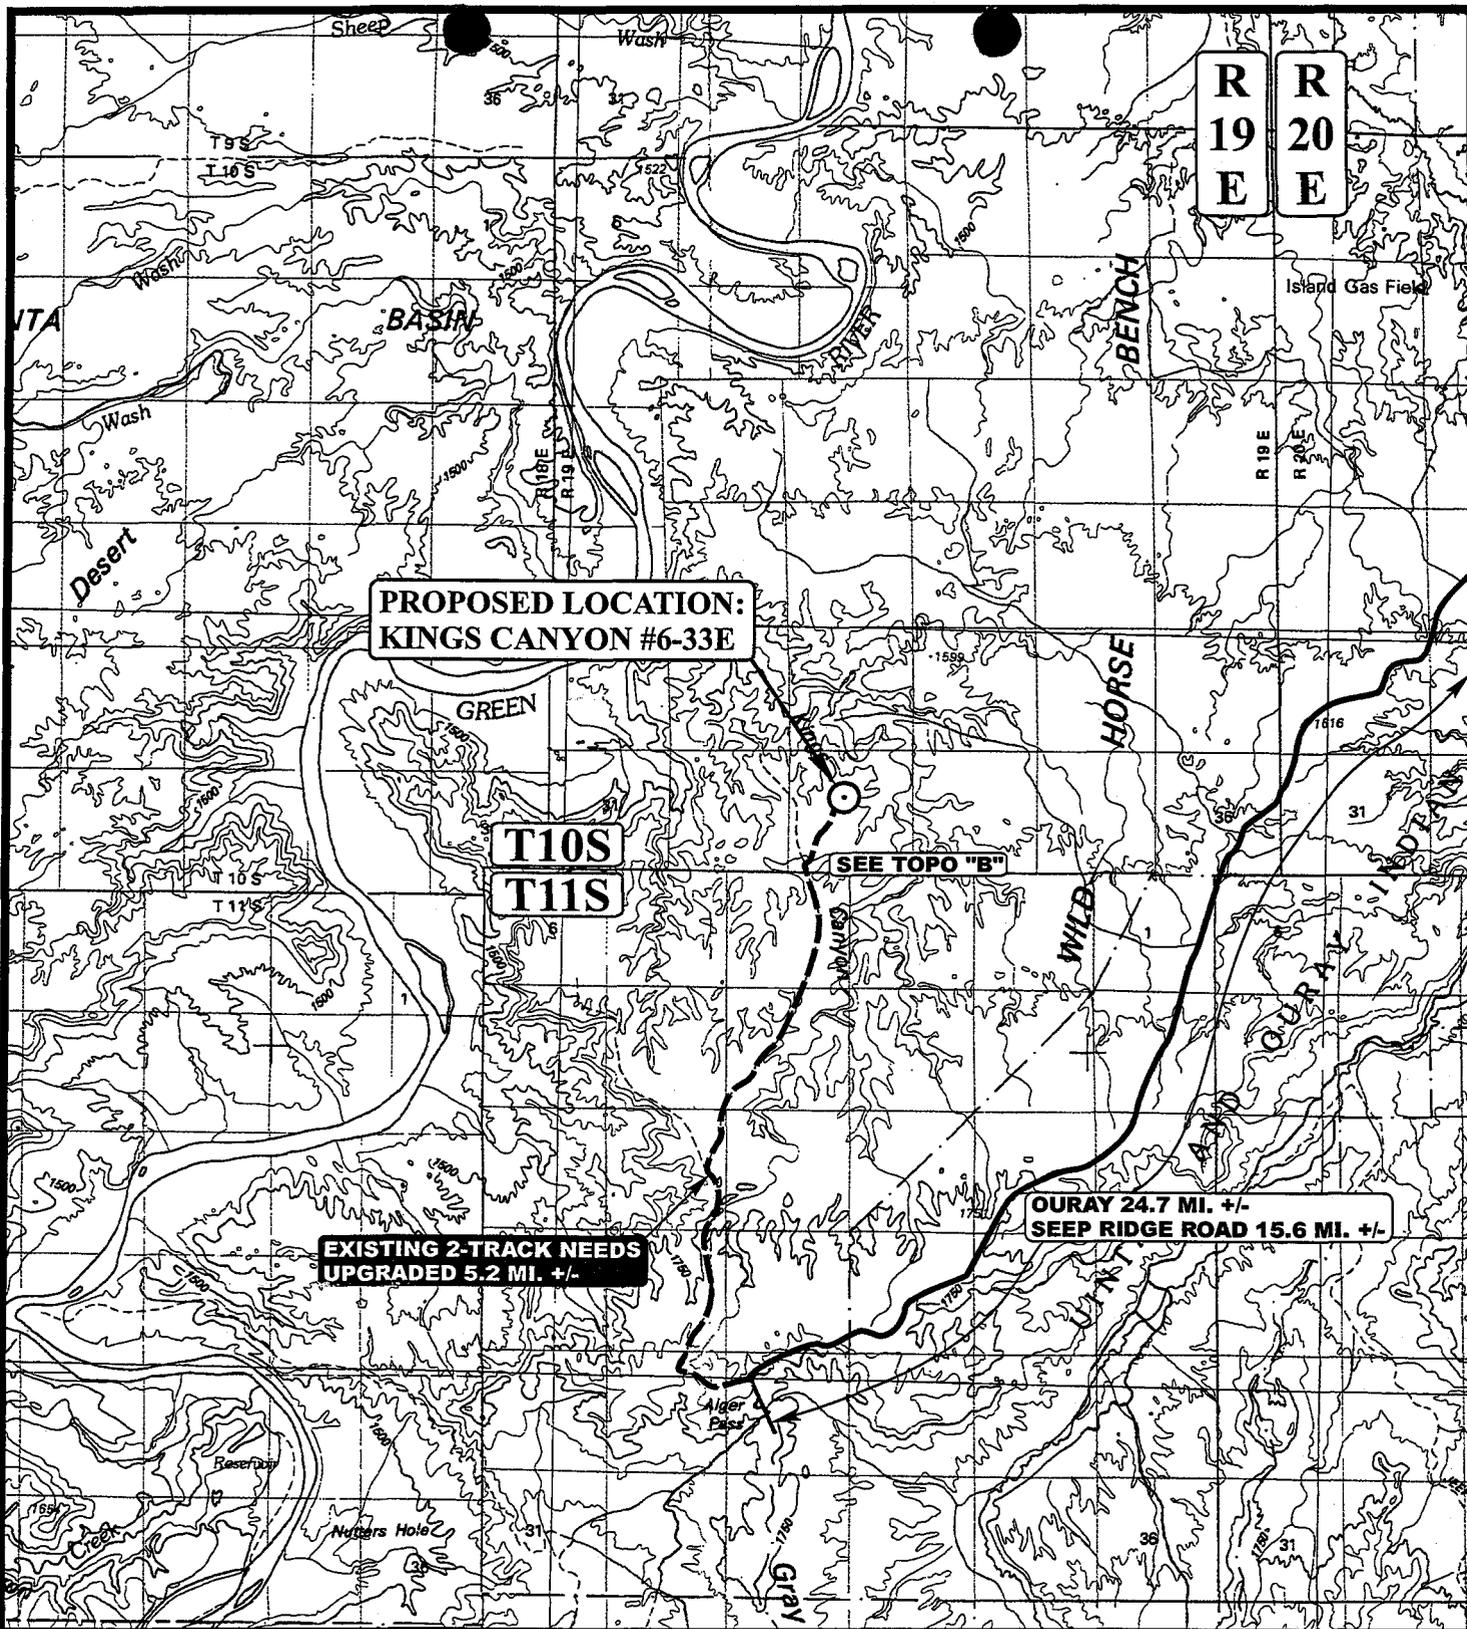

LEGEND:

⊙ PROPOSED LOCATION



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



DOMINION EXPLR. & PROD., INC.

KINGS CANYON #6-33E
SECTION 33, T10S, R19E, S.L.B.&M.
2018' FNL 2157' FWL


TOPOGRAPHIC
MAP

06	01	05
MONTH	DAY	YEAR

SCALE: 1:100,000 | DRAWN BY: C.P. | REVISED: 09-08-05



R
19
E

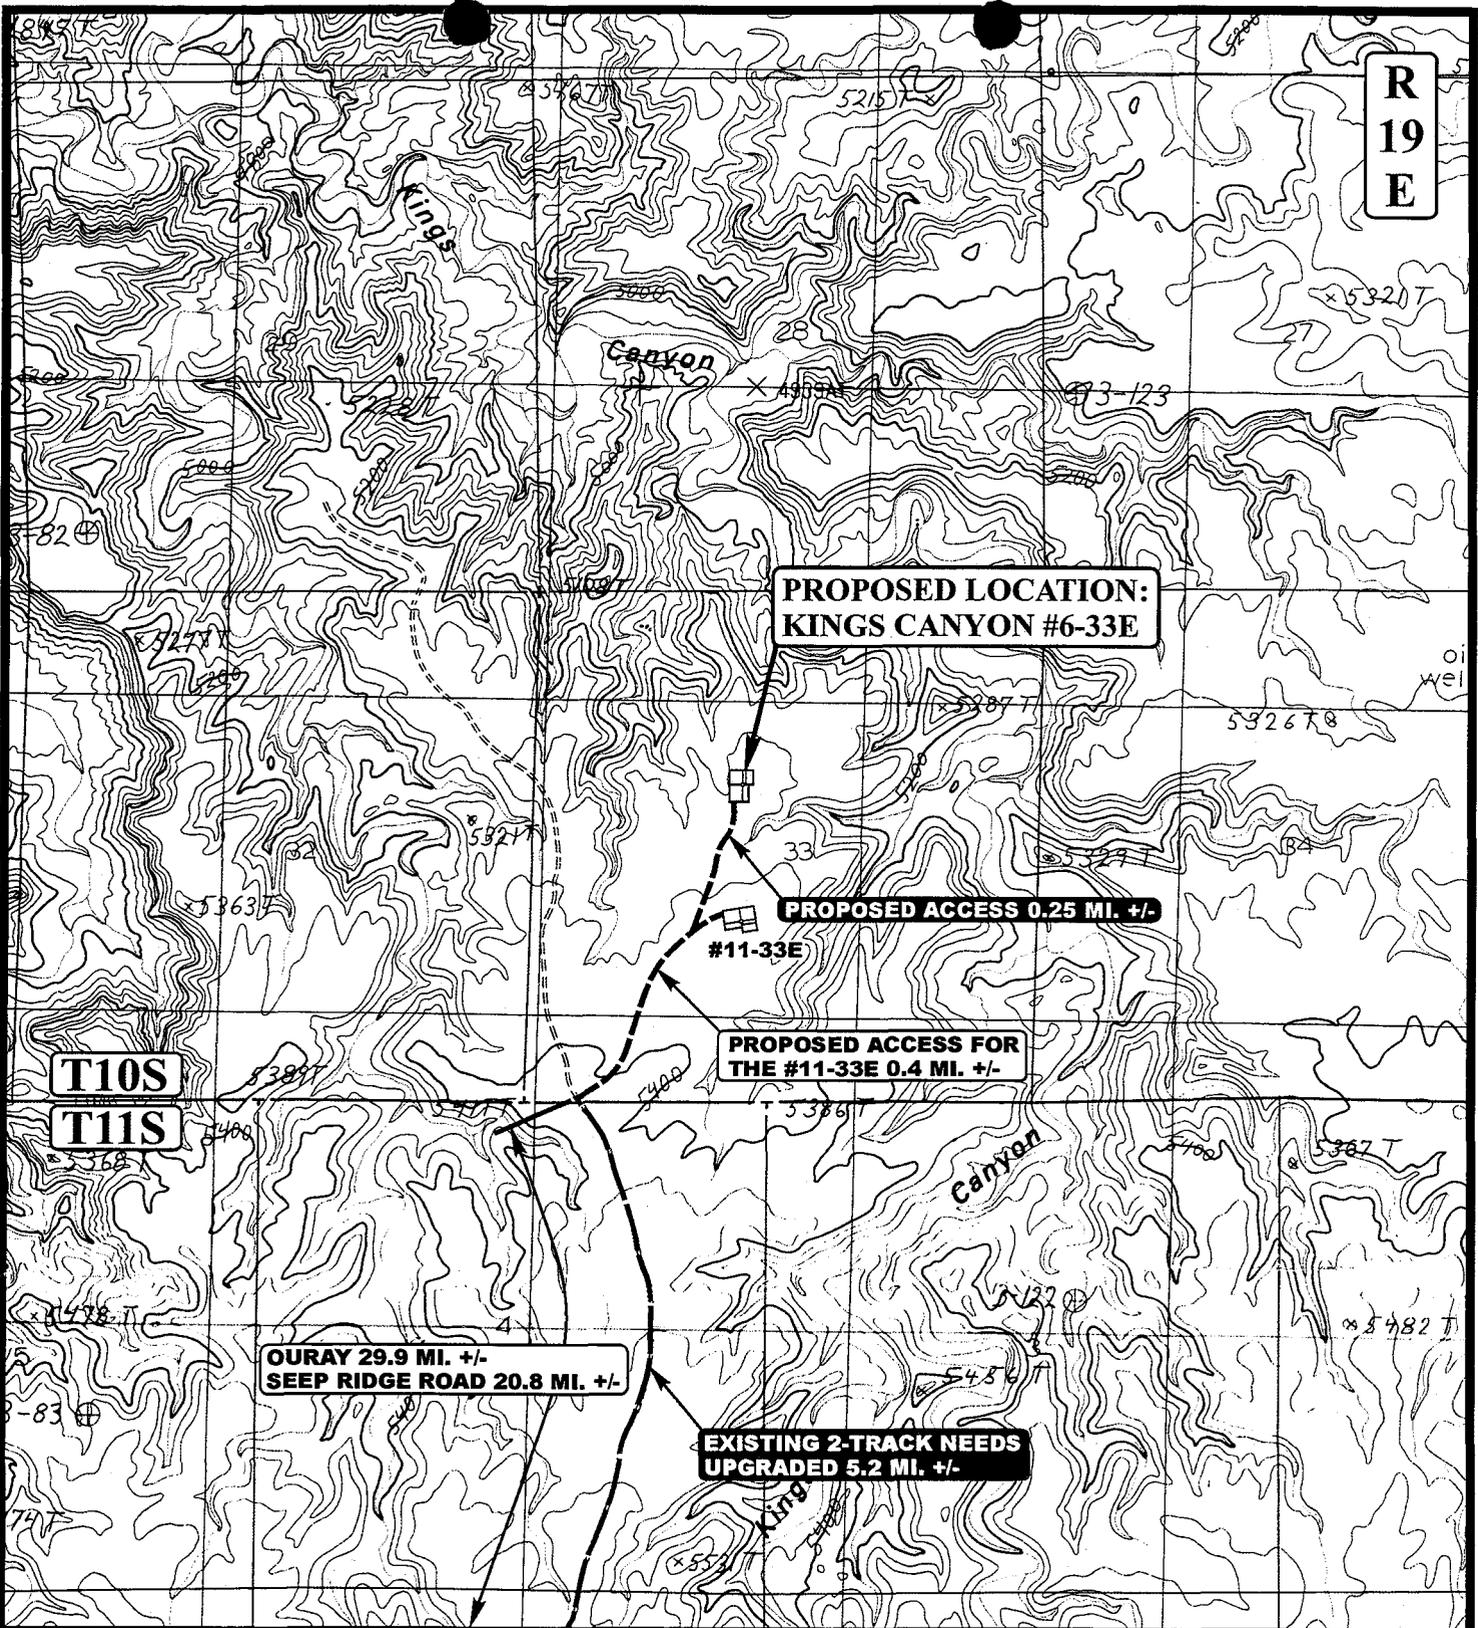

LEGEND:

- EXISTING ROAD
- - - - - PROPOSED ACCESS ROAD
- EXISTING 2-TRACK NEEDS UPGRADED



DOMINION EXPLR. & PROD., INC.

KINGS CANYON #6-33E
 SECTION 33, T10S, R19E, S.L.B.&M.
 2018' FNL 2157' FWL




Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC			06	01	05
MAP			MONTH	DAY	YEAR
SCALE: 1" = 2000'		DRAWN BY: C.P.		REVISED: 09-08-05	

B
TOPO

R
19
E

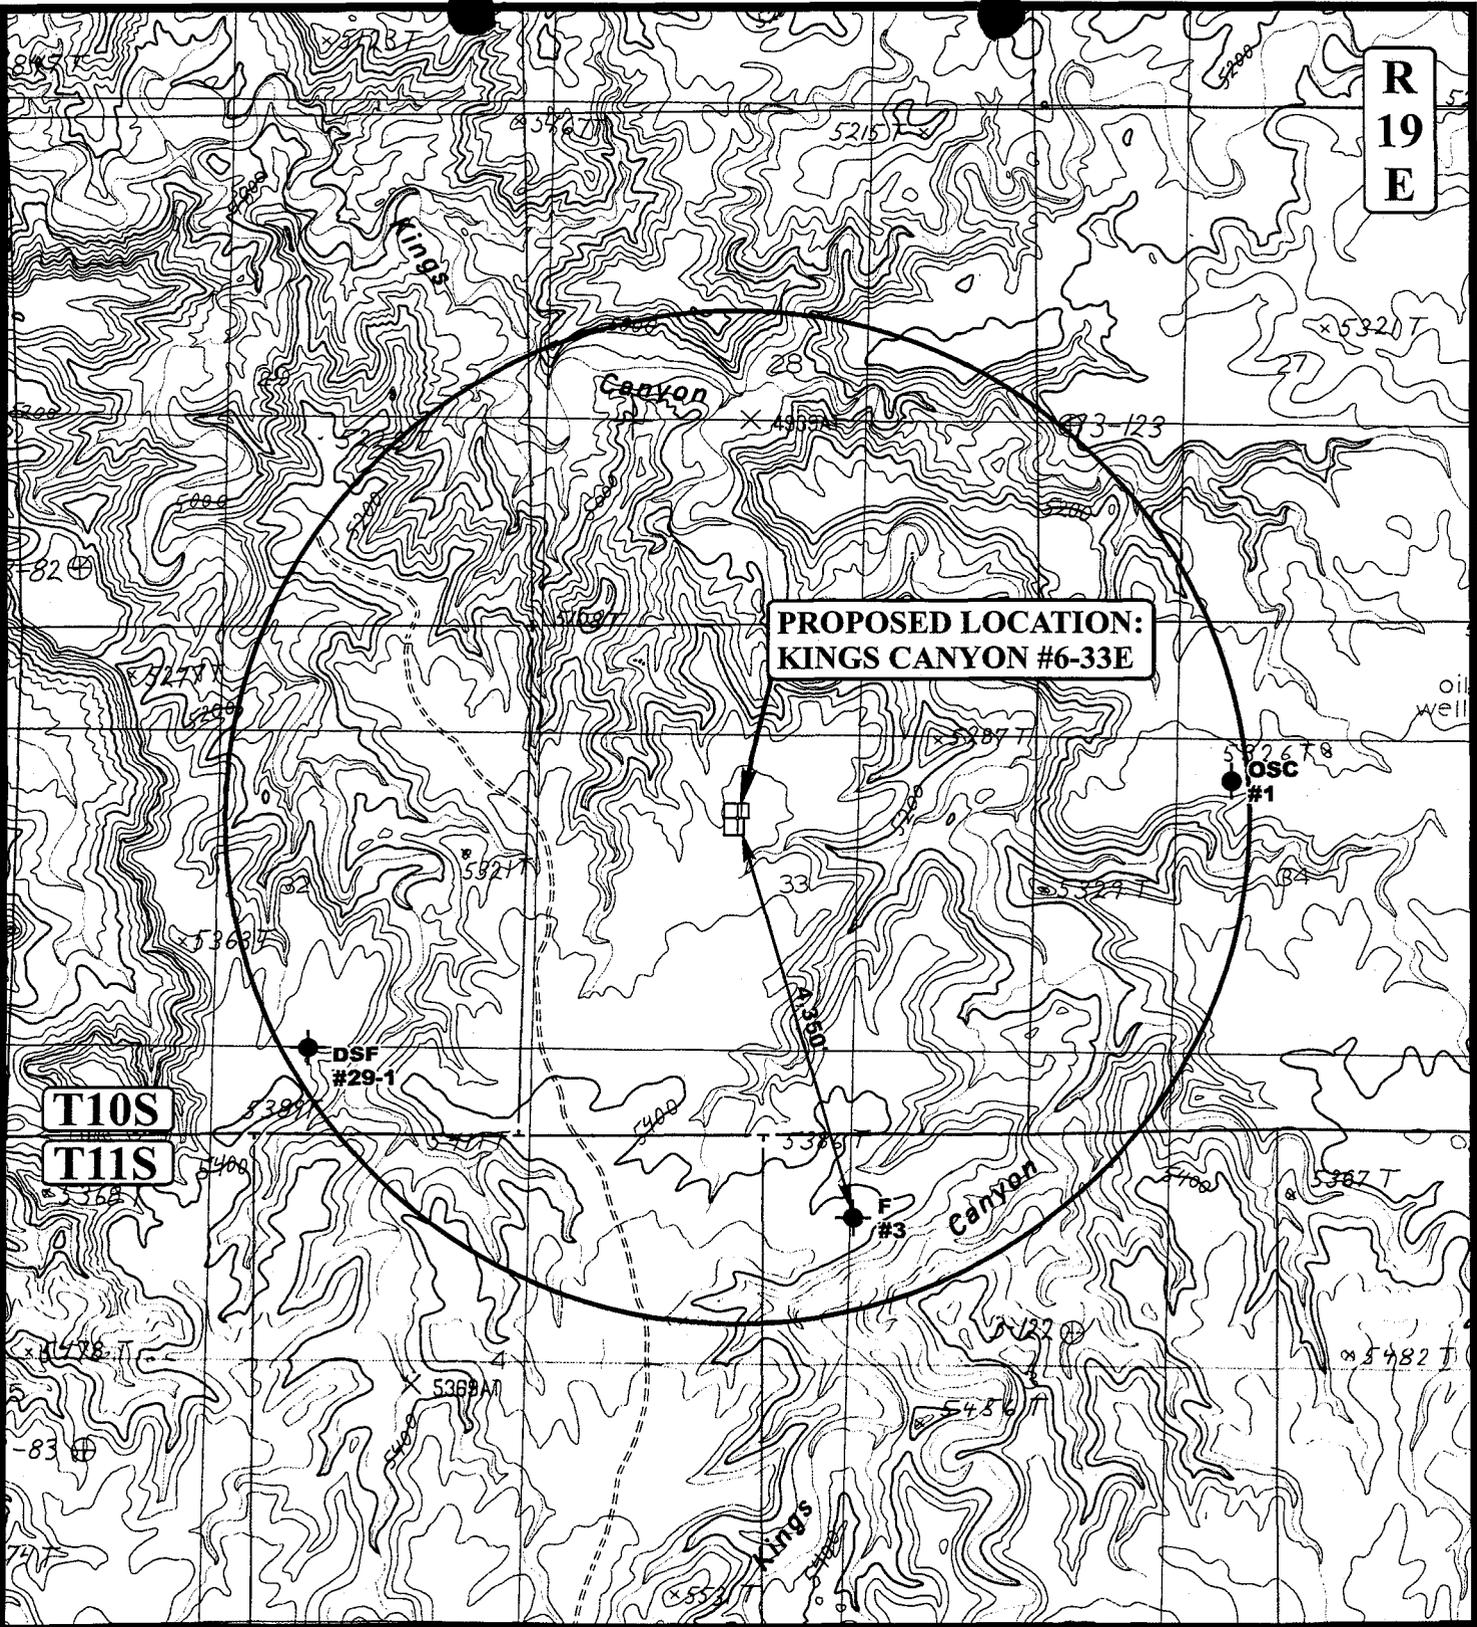

**PROPOSED LOCATION:
KINGS CANYON #6-33E**

T10S

T11S

LEGEND:

- ∅ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ♂ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED

DOMINION EXPLR. & PROD., INC.

**KINGS CANYON #6-33E
SECTION 33, T10S, R19E, S.L.B.&M.
2018' FNL 2160' FWL**

U&L S Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC MAP 06 01 05
MONTH DAY YEAR
SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00 **C TOPO**

R
19
E

PROPOSED LOCATION:
KINGS CANYON #6-33E

PROPOSED ACCESS ROAD

PROPOSED PIPELINE

#11-33E
TIE-IN POINT

PROPOSED PIPELINE
FOR THE #11-33E

T10S

T11S

Canyon

APPROXIMATE TOTAL PIPELINE DISTANCE = 1,440' +/-

LEGEND:

-  PROPOSED ACCESS ROAD
-  EXISTING 2-TRACK NEEDS UPGRADED
-  PROPOSED PIPELINE
-  PROPOSED PIPELINE (SERVICING OTHER WELLS)


DOMINION EXPLR. & PROD., INC.

KINGS CANYON #6-33E
SECTION 33, T10S, R19E, S.L.B.&M.
2018' FNL 2157' FWL

U&LS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC 06 01 05
MAP MONTH DAY YEAR
SCALE: 1" = 1000' DRAWN BY: C.P. REVISED: 00-00-00 **D**
TOPO

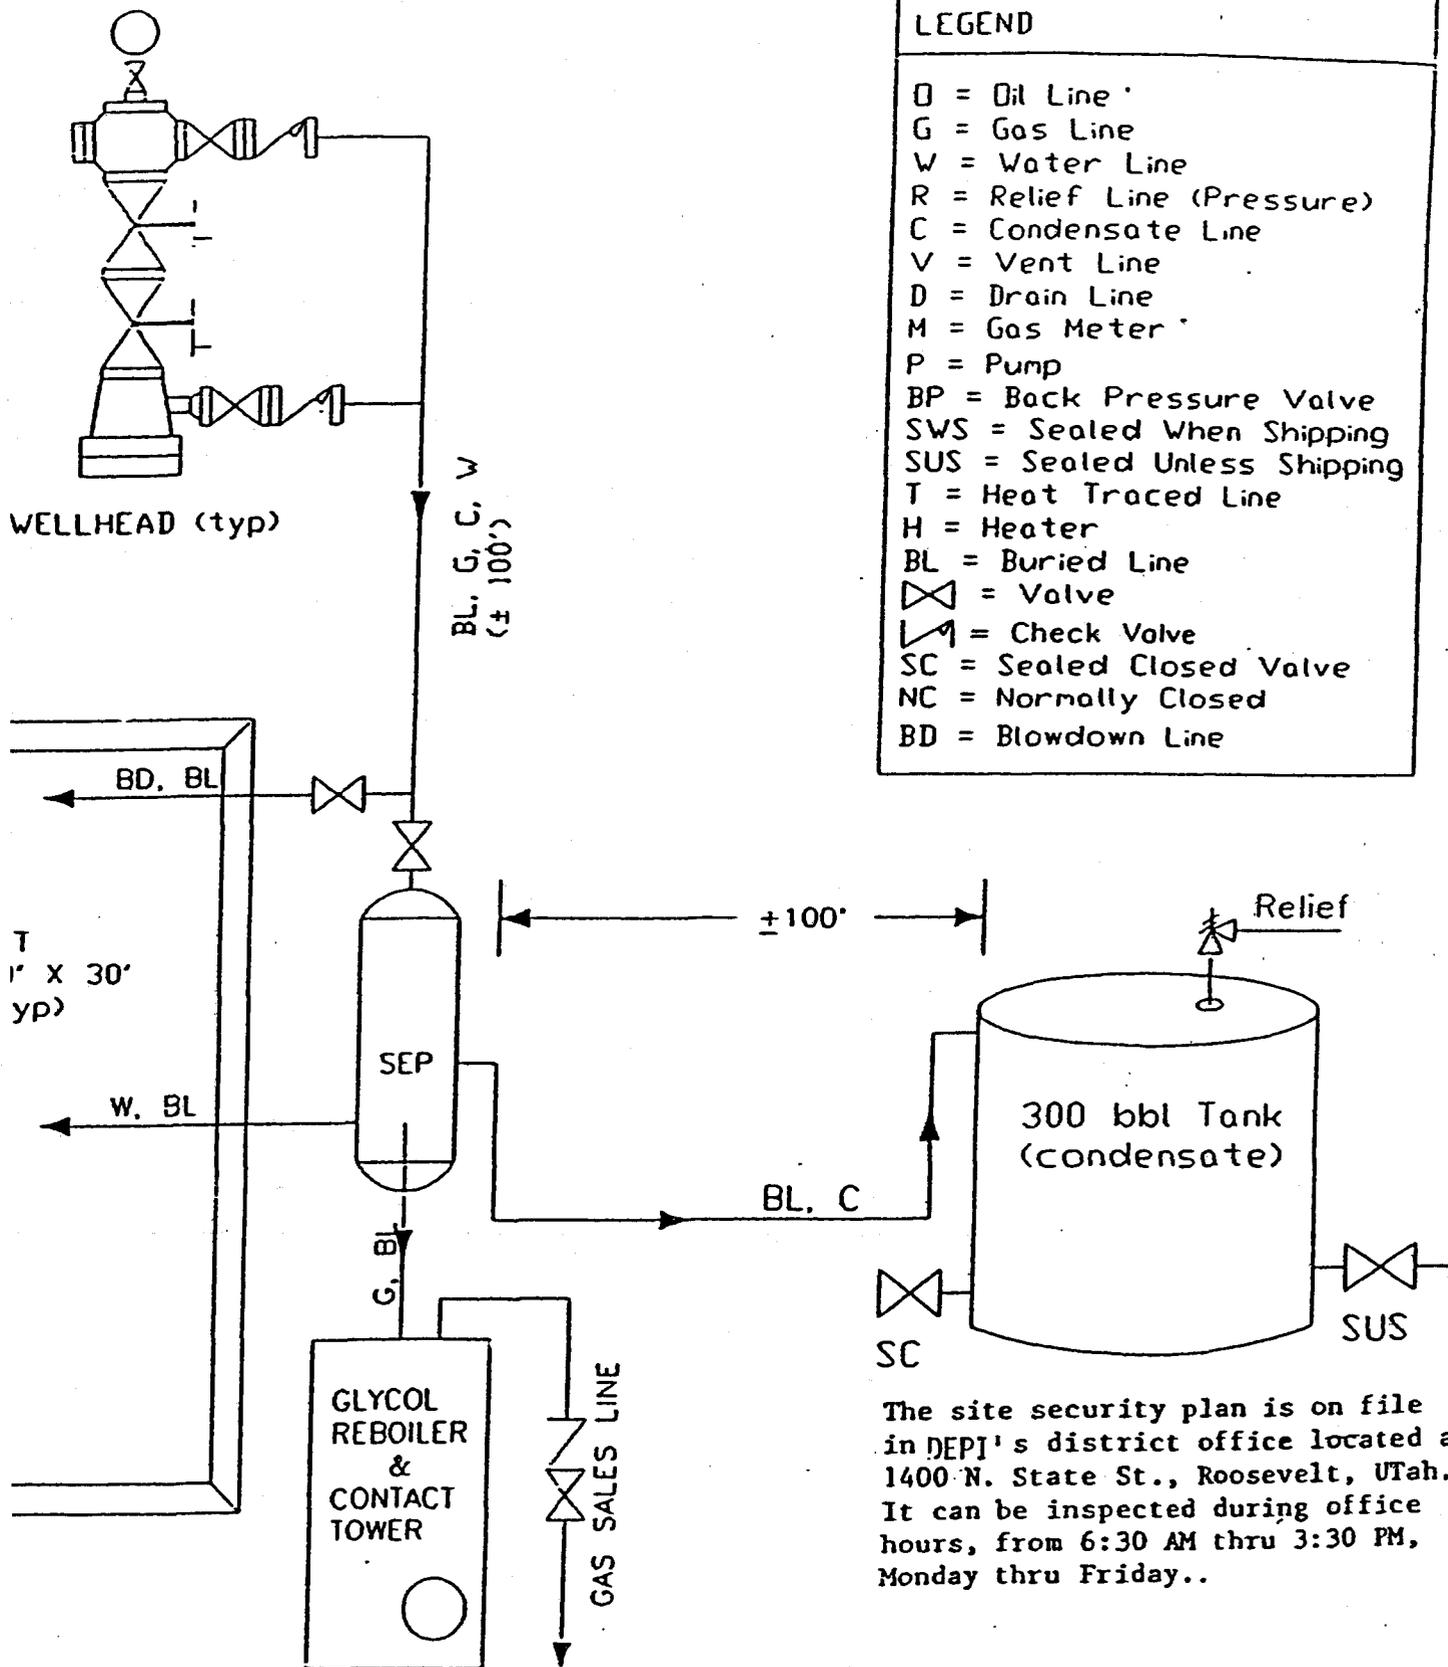


DOMINION EXPLORATION & PRODUCTION, INC.

TYPICAL FLOW DIAGRAM


not to scale

date: / /

BOP STACK

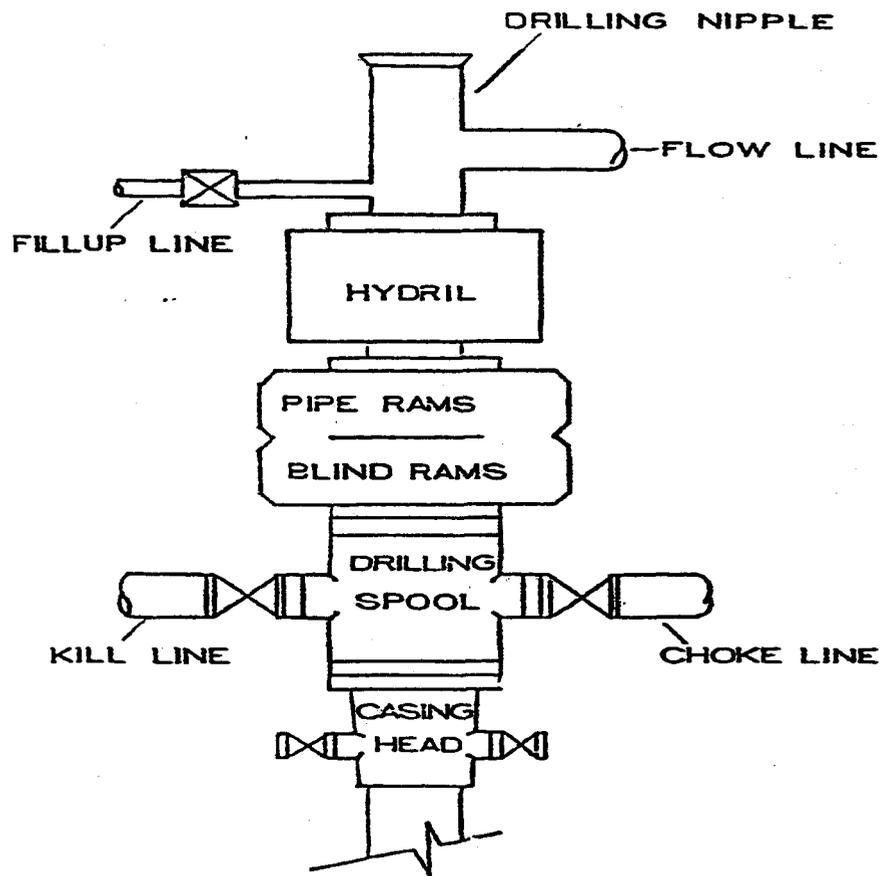

CHOKER MANIFOLD

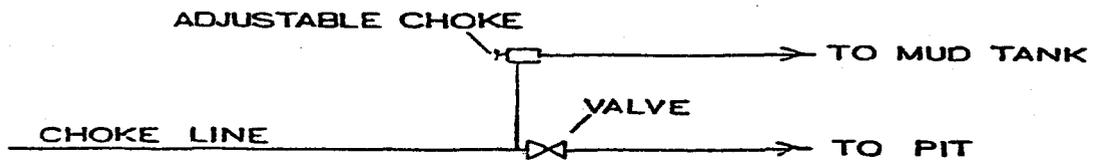

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 09/29/2005

API NO. ASSIGNED: 43-047-37195

WELL NAME: KC 6-33E
 OPERATOR: DOMINION EXPL & PROD (N1095)
 CONTACT: DON HAMILTON

PHONE NUMBER: 435-650-1886

PROPOSED LOCATION:

SENW 33 100S 190E
 SURFACE: 2018 FNL 2157 FWL
 BOTTOM: 2018 FNL 2157 FWL
 UINTAH
 NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal
 LEASE NUMBER: UTU-49522
 SURFACE OWNER: 1 - Federal
 PROPOSED FORMATION: MVRD
 COALBED METHANE WELL? NO

LATITUDE: 39.90525
 LONGITUDE: -109.7877

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. 76S630500330)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 43-10447)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)


LOCATION AND SITING:

- R649-2-3.
Unit _____
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: _____
Eff Date: _____
Siting: _____
- R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: 1. Federal Approval

2. Spacing Stip

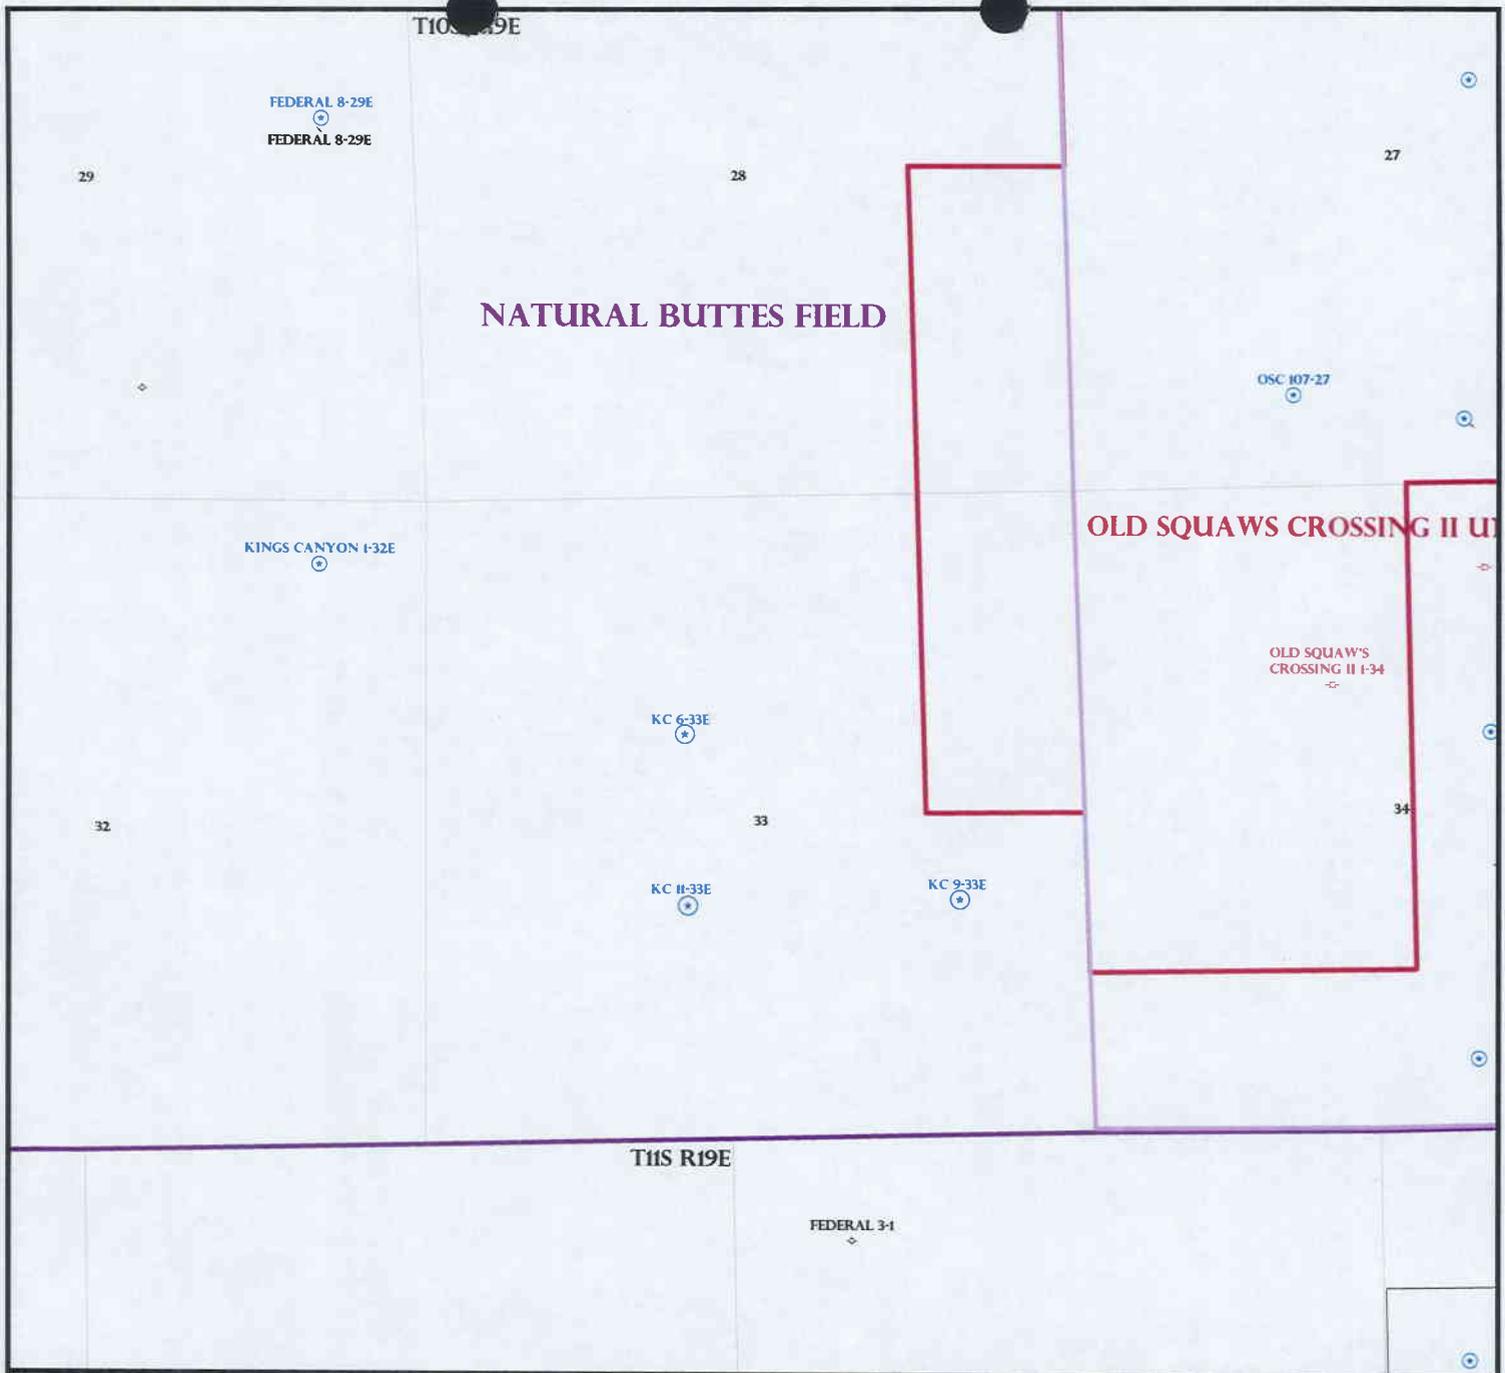

OPERATOR: DOMINION EXPL & PROD (N1095)

SEC: 33 T. 10S R. 19E

FIELD: NATURAL BUTTES (630)

COUNTY: Uintah

SPACING: R649-3-2 / GENERAL SITING

Field Status


ABANDONED
ACTIVE
COMBINED
INACTIVE
PROPOSED
STORAGE
TERMINATED

Unit Status

EXPLORATORY
GAS STORAGE
NF PP OIL
NF SECONDARY
PENDING
PI OIL
PP GAS
PP GEOTHERML
PP OIL
SECONDARY
TERMINATED

Wells Status

- ⊗ GAS INJECTION
- ⊗ GAS STORAGE
- ⊗ LOCATION ABANDONED
- ⊕ NEW LOCATION
- ⊗ PLUGGED & ABANDONED
- ⊗ PRODUCING GAS
- PRODUCING OIL
- ⊗ SHUT-IN GAS
- SHUT-IN OIL
- ⊗ TEMP. ABANDONED
- TEST WELL
- ⊕ WATER INJECTION
- ⊕ WATER SUPPLY
- ⊕ WATER DISPOSAL
- ⊕ DRILLING



Utah Oil Gas and Mining



PREPARED BY: DIANA WHITNEY
DATE: 29-SEPTEMBER-2005



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

September 29, 2005

Dominion Exploration & Production, Inc.
14000 Quail Springs Parkway, Suite 600
Oklahoma City, OK 73134

Re: Kings Canyon 6-33E Well, 2018' FNL, 2157' FWL, SE NW, Sec. 33,
T. 10 South, R. 19 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-37195.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.


1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		CONFIDENTIAL	5. Lease Serial No. UTU-49522
2. Name of Operator DOMINION EXPLORATION & PRODUCTION, INC.			6. If Indian, Allottee or Tribe Name
3a. Address Suite 600 14000 QUAIL SPGS PKWY, OKLA CITY, OK 73134		3b. Phone No. (include area code) 405-749-1300	7. If Unit or CA/Agreement, Name and/or No.
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 2018' FNL & 2157' FWL, SENW, Sec. 33-10S-19E			8. Well Name and No. Kings Canyon 6-33E
			9. API Well No. 43-047-37195
			10. Field and Pool, or Exploratory Area Natural Buttes
			11. County or Parish, State Uintah Co., Utah

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other APD Extension

13 Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

The State APD for this well expires September 29, 2006. Dominion is hereby requesting a one year extension.

Approved by the

 Date: 08-25-06
 By: [Signature]

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) Carla Christian	Title Sr. Regulatory Specialist
Signature <i>Carla Christian</i>	Date 28-Aug-06

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

9/27/06
RM

RECEIVED
AUG 31 2006
DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-37195
Well Name: Kings Canyon 6-33E
Location: Section 33-10S-19E, 2018' FNL & 2157' FWL
Company Permit Issued to: Dominion Exploration & Production, Inc.
Date Original Permit Issued: 9/29/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

Carla Hustian
Signature

8/28/2006
Date

Title: Sr. Regulatory Specialist

Representing: Dominion Exploration & Production, Inc.

RECEIVED
AUG 31 2006
DIV. OF OIL, GAS & MINING

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING

1. DJJ
2. CDW

X - Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

7/1/2007

FROM: (Old Operator): N1095-Dominion Exploration & Production, Inc 14000 Quail Springs Parkway, Suite 600 Oklahoma City, OK 73134 Phone: 1 (405) 749-1300	TO: (New Operator): N2615-XTO Energy Inc 810 Houston St Fort Worth, TX 76102 Phone: 1 (817) 870-2800
--	--

CA No.

Unit:

WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
SEE ATTACHED LIST								

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 8/6/2007
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 8/6/2007
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 8/6/2007
- Is the new operator registered in the State of Utah: _____ Business Number: 5655506-0143
- If **NO**, the operator was contacted on: _____
- (R649-9-2) Waste Management Plan has been received on: IN PLACE
- Inspections of LA PA state/fee well sites complete on: n/a
- Reports current for Production/Disposition & Sundries on: ok
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM BIA
- Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: _____
- Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: _____
- Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: _____

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 9/27/2007
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 9/27/2007
- Bond information entered in RBDMS on: 9/27/2007
- Fee/State wells attached to bond in RBDMS on: 9/27/2007
- Injection Projects to new operator in RBDMS on: 9/27/2007
- Receipt of Acceptance of Drilling Procedures for APD/New on: 9/27/2007

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: UTB000138
- Indian well(s) covered by Bond Number: n/a
- (R649-3-1) The **NEW** operator of any state/fee well(s) listed covered by Bond Number 104312762
- The **FORMER** operator has requested a release of liability from their bond on: 1/23/2008
The Division sent response by letter on: _____

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **NEW** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: _____

COMMENTS:

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER:
2. NAME OF OPERATOR: XTO Energy Inc. <i>N2615</i>		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: 810 Houston Street CITY Fort Worth STATE TX ZIP 76102		7. UNIT or CA AGREEMENT NAME:
4. LOCATION OF WELL FOOTAGES AT SURFACE: SEE ATTACHED QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		8. WELL NAME and NUMBER: SEE ATTACHED
PHONE NUMBER: (817) 870-2800		9. API NUMBER: SEE ATTACHED
COUNTY: Uintah		10. FIELD AND POOL, OR WILDCAT: Natural Buttes
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Effective July 1, 2007, XTO Energy Inc. has purchased the wells listed on the attachment from:

Dominion Exploration & Production, Inc. *N1095*
14000 Quail Springs Parkway, Suite 600
Oklahoma City, OK 73134

James D. Abercrombie (405) 749-1300
James D. Abercrombie
Sr. Vice President, General Manager - Western Business Unit

Please be advised that XTO Energy Inc. is considered to be the operator on the attached list and is responsible under the terms and conditions of the lease for the operations conducted upon the lease lands. Bond coverage is provided by Nationwide BLM Bond #104312750 and Department of Natural Resources Bond #104312762.

NAME (PLEASE PRINT) Edwin S. Ryan, Jr. TITLE Sr. Vice President - Land Administration
SIGNATURE *Edwin S. Ryan, Jr.* DATE 7/31/2007

(This space for State use only)

APPROVED 91271107
Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

(See Instructions on Reverse Side)

RECEIVED
AUG 06 2007
DIV. OF OIL, GAS & MINING

(5/2000)

7

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Request to Transfer Application or Permit to Drill

(This form should accompany a Sundry Notice, Form 9, requesting APD transfer)

Well name:	SEE ATTACHED LIST
API number:	
Location:	Qtr-Qtr: Section: Township: Range
Company that filed original application:	DOMINION E&P
Date original permit was issued:	
Company that permit was issued to:	DOMINION E&P

Check one	Desired Action:
<input type="checkbox"/>	Transfer pending (unapproved) Application for Permit to Drill to new operator
<input type="checkbox"/>	The undersigned as owner with legal rights to drill on the property, hereby verifies that the information as submitted in the pending Application for Permit to Drill, remains valid and does not require revision. The new owner of the application accepts and agrees to the information and procedures as stated in the application.
<input checked="" type="checkbox"/>	Transfer approved Application for Permit to Drill to new operator
<input type="checkbox"/>	The undersigned as owner with legal rights to drill on the property as permitted, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.	Yes	No
If located on private land, has the ownership changed?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
If so, has the surface agreement been updated?	<input type="checkbox"/>	<input type="checkbox"/>
Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Have there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Have there been any changes to the access route including ownership or right-of-way, which could affect the proposed location?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Has the approved source of water for drilling changed?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Is bonding still in place, which covers this proposed well? Bond No. <u>104312762</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Any desired or necessary changes to either a pending or approved Application for Permit to Drill that is being transferred, should be filed on a Sundry Notice, Form 9, or amended Application for Permit to Drill, Form 3, as appropriate, with necessary supporting information as required.

Name (please print) HOLLY C. PERKINS Title REGULATORY COMPLIANCE TECH
 Signature *Holly C. Perkins* Date 08/27/2007
 Representing (company name) XTO ENERGY INC.

The person signing this form must have legal authority to represent the company or individual(s) to be listed as the new operator on the Application for Permit to Drill.

AUG 30 2007

N1095 DOMINION E and P, INC. to N2615 XTO ENERGY, INC.

api	well_name	qtr_qtr	sec	twp	rng	lease_num	entity	Lease	well	stat
4303930028	SKYLINE U 14-28	SESW	28	140S	060E	UTU-77262		Federal	GW	APD
4303930029	SKYLINE U 8-7	SENE	07	150S	060E	UTU-78415		Federal	GW	APD
4304737195	KC 6-33E	SENW	33	100S	190E	UTU-49522		Federal	OW	APD
4304737196	KC 9-33E	NESE	33	100S	190E	UTU-49522		Federal	OW	APD
4304737197	KC 11-33E	NESW	33	100S	190E	UTU-49522		Federal	OW	APD
4304738075	LCU 7-9H	NWSE	09	110S	200E	UTU-76265		Federal	GW	APD
4304738689	RBU 15-8E	NENE	17	100S	190E	U-013766		Federal	GW	APD
4304738783	KC 14-33E	SESW	33	100S	190E	UTU-49522		Federal	GW	APD
4304738868	LOVE 12-20G	NWSW	20	110S	210E	UTU-076040		Federal	GW	APD
4304738889	KC 9-31E	NESE	31	100S	190E	UTU-81719		Federal	GW	APD
4304738890	KC 13-31E	SWSW	31	100S	190E	UTU-81719		Federal	GW	APD
4304738891	KC 12-33E	NWSW	33	100S	190E	UTU-49522		Federal	GW	APD
4304738948	KC 14-31E	SESW	31	100S	190E	UTU-081719		Federal	GW	APD
4304738949	KC 3-33E	NENW	33	100S	190E	UTU-49522		Federal	GW	APD
4304739051	KC 15-31E	SWSE	31	100S	190E	UTU-81719		Federal	GW	APD
4304739068	KC 7-33E	SWNE	33	100S	190E	UTU-49522		Federal	GW	APD
4304739069	KC 13-33E	SWSW	33	100S	190E	UTU-49522		Federal	GW	APD
4304739070	KC 15-33E	SWSE	33	100S	190E	UTU-49522		Federal	GW	APD
4304739415	WHB 4-5H	NWNW	05	110S	200E	UTU-39223		Federal	GW	APD
4304739416	WHB 12-5H	NWSW	05	110S	200E	UTU-39223		Federal	GW	APD
4304739417	WHB 13-5H	SWSW	05	110S	200E	UTU-39223		Federal	GW	APD
4304739440	WHB 4-8H	NWNW	08	110S	200E	UTU-39223		Federal	GW	APD
4304739441	WHB 5-5H	NWNW	05	110S	200E	UTU-39223		Federal	GW	APD
4304738262	KINGS CYN 9-32E	NESE	32	100S	190E	ML-047059		State	GW	APD
4304738342	LCU 12-12H	NWSW	12	110S	200E	FEE		Fee	GW	APD
4304738378	KINGS CYN 11-32E	NESW	32	100S	190E	ML-047059		State	GW	APD
4304738690	KINGS CYN 11-36D	NESW	36	100S	180E	ML-47058		State	GW	NEW
4304738779	KC 5-36D	SWNW	36	100S	180E	ML-47058		State	GW	APD
4304738781	KC 6-32E	SENW	32	100S	190E	ML-47059		State	GW	APD
4304738782	KC 15-32E	NWSE	32	100S	190E	ML-047059		State	GW	APD
4304738786	AP 11-2J	NESW	02	110S	190E	ML-36213		State	GW	APD
4304738787	AP 13-2J	SWSW	02	110S	190E	ML-36213		State	GW	APD
4304738950	KC 13-32E	SESW	32	100S	190E	ML-047059		State	GW	APD
4304739218	KC 14-32E	SESW	32	100S	190E	ML-047059		State	GW	APD
4304739219	KC 16-32E	SESE	32	100S	190E	ML-047059		State	GW	APD
4304739222	LCU 14-12H	SESW	12	110S	200E	FEE		Fee	GW	APD
4304739315	AP 12-2J	NWSW	02	110S	190E	ML-36213		State	GW	NEW

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-49522
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME: Undesignated
2. NAME OF OPERATOR: XTO Energy		8. WELL NAME and NUMBER: KC 6-33E
3. ADDRESS OF OPERATOR: P.O. Box 1360 Roosevelt UT 84066		9. API NUMBER: 4304737195
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2,018' FNL & 2,157' FWL QTRQTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SENW 33 10S 19E S		10. FIELD AND POOL, OR WLDCAI: Undesignated
		COUNTY: Uintah STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____ <input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Permit Extension</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

XTO Energy. hereby requests a one year extension of the state permit for the referenced well.

This is the second extension that has been requested.


**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: 10-02-07
By: [Signature]

COPY SENT TO OPERATOR
Date: 10-3-07
Initials: RM

NAME (PLEASE PRINT) <u>Marnie Griffin</u>	TITLE <u>Agent for XTO Energy</u>
SIGNATURE <u>[Signature]</u>	DATE <u>9/7/2007</u>

(This space for State use only)





**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304737195
Well Name: KC 6-33E
Location: Sec. 33, 10S-19E 2018' FNL 2,157' FWL
Company Permit Issued to: XTO Energy
Date Original Permit Issued: 9/29/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No



 Signature

9/7/2007

 Date

Title: Agent

Representing: XTO Energy

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-49522
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME: undesignated
2. NAME OF OPERATOR: XTO Energy, Inc.		8. WELL NAME and NUMBER: KC 6-33E
3. ADDRESS OF OPERATOR: P.O. Box 1360 CITY Roosevelt STATE UT ZIP 84066		9. API NUMBER: 4304737195
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2,018' FNL & 2,157' FWL COUNTY: Uintah QTR/CTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: 33 10S 19E S STATE: UTAH		10. FIELD AND POOL, OR WILDCAT: Undesignated

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____ <input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PLUG BACK <input type="checkbox"/> PRODUCTION (START/RESUME) <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	<input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> WATER SHUT-OFF <input checked="" type="checkbox"/> OTHER: <u>Permit Extension</u>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

XTO Energy, Inc. hereby requests a one year extension of the state permit for the referenced well.
This is the third extension that has been requested.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 10/30/08
By: [Signature]


NAME (PLEASE PRINT) <u>Kendell Johnson</u>	TITLE <u>Agent for XTO Energy, Inc.</u>
SIGNATURE <u>[Signature]</u>	DATE <u>9/22/2008</u>

(This space for State use only)

(5/2000)

COPY SENT TO OPERATOR
Date: 10.30.2008
Initials: KS

(See Instructions on Reverse Side)



**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304737195
Well Name: KC 6-33E
Location: 2,018' FNL & 2,157' FWL Sec. 33, 10S-19E
Company Permit Issued to: XTO Energy, Inc.
Date Original Permit Issued: 9/29/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No


Signature

9/22/2008

Date

Title: Kendell Johnson

Representing: XTO Energy, Inc.

SURFACE USE PLAN

Well Location: Kings Canyon 6-33E
2018' FNL & 2157' FWL
Section 33-10S-19E
Uintah County, UT


43-047-37195

The surface owner or surface owner representative and dirt contractor will be provided with an approved copy of the surface use plan of operations and approved conditions of approval before initiating construction.

The federal onsite inspection for the referenced well was conducted on Tuesday, September 6, 2005 at approximately 11:30 pm. In attendance at the onsite inspection were the following individuals:

Ken Secrest	Foreman	Dominion E & P, Inc.
Karl Wright	Nat. Res. Prot. Spec.	Bureau of Land Management – Vernal
Amy Torres	Biologist	Bureau of Land Management – Vernal
Brandon Bowthorpe	Surveyor	Uintah Engineering and Land Surveying
Jason Robins	Surveyor Helper	Uintah Engineering and Land Surveying
Bill McClure	Foreman	LaRose Construction

1. Location of Existing Roads:
 - a. The proposed well site is located approximately 13.94 miles southwest of Ouray, Utah.
 - b. Directions to the proposed well site have been attached at the end of Exhibit B.
 - c. The use of roads under State and County Road Department maintenance are necessary to access the Kings Canyon area. However, an encroachment permit is not anticipated since no upgrades to the State or County Road system are proposed at this time.
 - d. All existing roads will be maintained and kept in good repair during all phases of operation.
 - e. Vehicle operators will obey posted speed restrictions and observe safe speeds commensurate with road and weather conditions.
 - f. Since no improvements are anticipated to the State, County, Tribal or BLM access roads no topsoil striping will occur.
 - g. An off-lease federal Right-of-Way is not anticipated for the access road or utility corridor since both are located within the existing lease boundary.



2. Planned Access Roads:

- a. From the existing Kings Canyon Uintah County Road an access is proposed trending northeast approximately 0.65 miles to the proposed well site. The access consists of mostly new disturbance and crosses no significant drainages. A road design plan is not anticipated at this time (see attached map).
- b. A road design plan is not anticipated at this time.
- c. The proposed access road will consist of a 24' travel surface within a 30' disturbed area across entirely BLM surface.
- d. BLM approval to construct and utilize the proposed access road is requested with this application.
- e. A maximum grade of 10% will be maintained throughout the project.
- f. No turnouts are proposed since adequate site distance exists in all directions.
- g. No low-water crossings and no culverts are anticipated. Adequate drainage structures will be incorporated into the road.
- h. No surfacing material will come from federal or Indian lands.
- i. No gates or cattle guards are anticipated at this time.
- j. Surface disturbance and vehicular travel will be limited to the approved location access road.
- k. All access roads and surface disturbing activities will conform to the standards outlined in the Bureau of Land Management and Forest Service publication: Surface Operating Standards and Guidelines for Oil and Gas Exploration and Development (Gold Book –Fourth Edition - Revised 2007).
- l. The operator will be responsible for all maintenance of the access road including drainage structures.

3. Location of Existing Wells:

- a. Exhibit B has a map reflecting these wells within a one mile radius of the proposed well.

4. Location of Existing and/or Proposed Production Facilities:

- a. All permanent structures will be painted a flat, non-reflective Covert Green /Carlsbad Canyon to match the standard environmental colors. All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) may be excluded.
- b. Site security guidelines identified in 43 CFR 3163.7-5 and Onshore Oil and Gas Order No. 3 will be adhered to.
- c. A gas meter run will be constructed and located on lease within 500 feet of the wellhead. Meter runs will be housed and/or fenced. All gas production and measurement shall comply with the provisions of 43 CFR 3162. 7-3, Onshore Oil and Gas Order No. 5, and American Gas Association (AGA) Report No. 3.
- d. A tank battery will be constructed on this lease, it will be surrounded by a dike of

sufficient capacity to contain the storage capacity of the largest tank. All loading lines and valves will be placed inside the berm surrounding the tank battery. All liquid hydrocarbons production and measurement shall conform to the provisions of 43 CFR 3162.7-3 and Onshore Oil and Gas Order No. 4 and Onshore Oil and Gas Order No. 5 for natural gas production and measurement.

- e. Any necessary pits will be properly fenced to prevent any wildlife and livestock entry.
 - f. All access roads will be maintained as necessary to prevent erosion and accommodate year-round traffic. The road will be maintained in a safe useable condition.
 - g. The site will require periodic maintenance to ensure that drainages are kept open and free of debris, ice, and snow, and that surfaces are properly treated to reduce erosion, fugitive dust, and impacts to adjacent areas.
 - h. A pipeline corridor containing a single steel gas pipeline is associated with this application and is being applied for at this time. The proposed pipeline corridor will leave the south side of the well site and traverse 1,440' southwest to the proposed KC 11-33E pipeline corridor. The corridor will then continue on trending southwest approximately 2,300' to the existing KC 1-32E pipeline corridor.
 - i. The new segment of gas pipeline will be a 12" or less buried line within a 45' wide pipeline corridor.
 - j. Construction of the pipeline corridor will temporarily utilize the 30' disturbed width for the road for a total disturbed width of 75' for the road and pipeline corridors. The use of the proposed well site and access roads will facilitate the staging of the pipeline corridor construction.
 - k. The pipeline will be buried and connect the pipeline together utilizing conventional welding technology.
5. Location and Type of Water Supply:
- a. No water supply pipelines will be laid for this well.
 - b. No water well will be drilled for this well.
 - c. Drilling water for this well will be hauled on the road(s) shown in Exhibit B.
 - d. Water will be hauled from one of the following sources:
 - o Water Permit # 43-10991, Section 9, T8S, R20E;
 - o Water Permit #49-2189, Section 33, T8S, R20E;
 - o Water Permit #49-2158, Section 33, T8S, R20E;
 - o Water Permit #49-2262, Section 33, T8S, R20E;
 - o Water Permit #49-1645, Section 5, T9S, R22E;
 - o Water Permit #43-9077, Section 32, T6S, R20E;
 - o Tribal Resolution 06-183, Section 22, T10S, R20E;

6. Source of Construction Material:

- a. The use of materials will conform to 43 CFR 3610.2-3.
- b. No construction materials will be removed from Ute Tribal or BLM lands.
- c. If any gravel is used, it will be obtained from a state approved gravel pit.

7. Methods of Handling Waste:

- a. All wastes associated with this application will be contained and disposed of utilizing approved facilities.
- b. Drill cuttings will be contained and buried on site.
- c. The reserve pit will be located outboard of the location and along the east side of the pad.
- d. The reserve pit will be constructed so as not to leak, break, or allow any discharge.
- e. The reserve pit will be lined with 16 mil minimum thickness plastic nylon reinforced liner material. The liner will overlay a felt liner pad only if rock is encountered during excavation. The pit liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash, scrap pipe, etc., that could puncture the liner will be disposed of in the pit. Pit walls will be sloped no greater than 2:1. A minimum 2-foot freeboard will be maintained in the pit at all times during the drilling and completion operation.
- f. The reserve pit has been located in cut material. Three sides of the reserve pit will be fenced before drilling starts. The fourth side will be fenced as soon as drilling is completed, and shall remain until the pit is dry. After the reserve pit has dried, all areas not needed for production will be rehabilitated.
- g. No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completion of the well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completion of the well.
- h. Trash will be contained in a trash cage and hauled away to an approved disposal site as necessary but no later than at the completion of drilling operations. The contents of the trash container will be hauled off periodically to the approved Uintah County Landfill near Vernal, Utah.
- i. Produced fluids from the well other than water will be produced into a test tank until such time as construction of production facilities is completed. Any spills of oil, gas, salt water or other produced fluids will be cleaned up and removed.
- j. After initial clean-up, a 400 bbl tank will be installed to contain produced waste water. This water will be transported from the tank to an approved disposal well for disposal.
- k. Produced water from the production well will be disposed of at the RBU 13-11F or RBU 16-19F disposal wells in accordance with Onshore Order #7.
- l. Any salts and/or chemicals, which are an integral part of the drilling system, will be disposed of in the same manner as the drilling fluid.

m. Sanitary facilities will be on site at all times during operations. Sewage will be placed in a portable chemical toilet and the toilet replaced periodically utilizing a licensed contractor to transport by truck the portable chemical toilet so that its contents can be delivered to the Vernal Wastewater Treatment Facility in accordance with state and county regulations.

8. Ancillary Facilities:

- a. Garbage Containers and Portable Toilets are the only ancillary facilities proposed in this application.
- b. No camps, airstrips or staging areas are proposed with this application.

9. Well Site Layout: (See Exhibit B)

- a. The well will be properly identified in accordance with 43 CFR 3162.6.
- b. Access to the well pad will be from the south.
- c. The pad and road designs are consistent with BLM specifications.
- d. A pre-construction meeting with responsible company representative, contractors and the BLM will be conducted at the project site prior to commencement of surface-disturbing activities. The pad and road will be construction-staked prior to this meeting.
- e. The pad has been staked at its maximum size; however it will be constructed smaller if possible, depending upon rig availability. Should the layout change, this application will be amended and approved utilizing a sundry notice.
- f. All surface disturbing activities, will be supervised by a qualified, responsible company representative who is aware of the terms and conditions of the APD and specifications in the approved plans.
- g. All cut and fill slopes will be such that stability can be maintained for the life of the activity.
- h. Diversion ditches will be constructed as shown around the well site to prevent surface waters from entering the well site area.
- i. The site surface will be graded to drain away from the pit to avoid pit spillage during large storm events.
- j. The stockpiled topsoil (first 6 inches or maximum available) will be stored in a windrow on the uphill side of the location to prevent any possible contamination. All topsoil will be stockpiled for reclamation in such a way as to prevent soil loss and contamination.
- k. Pits will remain fenced until site cleanup.
- l. The blooie line will be located at least 100 feet from the well head.
- m. Water injection may be implemented if necessary to minimize the amount of fugitive dust.

10. Plans for Restoration of the Surface (Interim Reclamation and Final Reclamation):
- a. Site reclamation for a producing well will be accomplished for portions of the site not required for the continued operation of the well.
 - b. Upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1. Once the reserve pit is dry, the plastic nylon reinforced liner shall be torn and perforated before backfilling of the reserve pit. The reserve pit and that portion of the location not needed for production facilities/operations will be re-contoured to the approximate natural contours.
 - c. Following BLM published Best Management Practices the interim reclamation will be completed within 90 days of completion of the well to reestablish vegetation, reduce dust and erosion and compliment the visual resources of the area.
 - a. All equipment and debris will be removed from the area proposed for interim reclamation and the pit area will be backfilled and re-contoured.
 - b. The area outside of the rig anchors and other disturbed areas not needed for the operation of the well will be re-contoured to blend with the surrounding area and reseeded at 12 lbs /acre with the following native grass seeds:
 - o Hy-Crested Wheat Grass (4 lbs / acre)
 - o Needle and Thread Grass (4 lbs / acre)
 - o Rice Grass (4 lbs / acre)
 - c. Reclaimed areas receiving incidental disturbance during the life of the producing well will be re-contoured and reseeded as soon as practical.
 - d. The Operator will control noxious weeds along access road use authorizations, pipeline route authorizations, well sites, or other applicable facilities by spraying or mechanical removal. A list of noxious weeds may be obtained from the BLM or the appropriate County Extension Office. On BLM administered land, it is required that a Pesticide Use Proposal be submitted and approved prior to the application of herbicides, pesticides or possibly hazardous chemicals.
 - e. Prior to final abandonment of the site, all disturbed areas, including the access road, will be scarified and left with a rough surface. The site will then be seeded and/or planted as prescribed by the BLM. The BLM recommended seed mix will be detailed within their approval documents.

11. Surface and Mineral Ownership:

- a. Surface Ownership – Federal under the management of the Bureau of Land Management - Vernal Field Office, 170 South 500 East, Vernal, Utah 84078; 435-781-4400.
- b. Mineral Ownership – Federal under the management of the Bureau of Land Management - Vernal Field Office, 170 South 500 East, Vernal, Utah 84078; 435-781-4400.

12. Other Information:

a. Operators Contact Information:

Title	Name	Office Phone	Mobile Phone	e-mail
Company Rep.	Ken Secrest	435-722-4521	435-828-1450	Ken_Secrest@xtoenergy.com
Agent	Don Hamilton	435-719-2018	435-719-2018	starpoin@etv.net

- b. An Independent Archeologist. has conducted a Class III archeological survey. A copy of the report has been submitted under separate cover to the appropriate agencies by An Independent Archeologist.
- c. Alden Hamblin has conducted a paleontological survey. A copy of the report has been submitted under separate cover to the appropriate agencies by Alden Hamblin.
- d. Our understanding of the results of the onsite inspection are:
 - a. No Threatened and Endangered flora and fauna species were found during the onsite inspection.
 - b. No drainage crossings that require additional State or Federal approval are being crossed.
 - c. **The project is located in an area of known wild horse populations and will likely contain standard wild horse stipulations and restrictions.**
 - d. **The project is located in an area of known burrowing owl habitat and will likely contain standard burrowing owl stipulations and restrictions.**
 - e. **The project is located in an area of known Golden Eagle habitat and will likely contain standard burrowing owl stipulations and restrictions.**

Certification:

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exists; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application and that bond coverage is provided under XTO Energy, Inc's BLM bond UTB-000138. These statements are subject to the provisions of 18 U.S.C. 1001 for the fling of false statements.

Executed this 9th day of February, 2009.

Ken Secrest – Regulatory Coordinator for XTO Energy, Inc.
P.O. Box 1360;
Roosevelt, Utah 84066

435-722-4521
Ken_Secrest@xtoenergy.com

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		7. If Unit or CA Agreement, Name and No. N/A
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		8. Lease Name and Well No. KC 6-33E
2. Name of Operator XTO Energy, Inc.		9. API Well No. 43-047-37195
3a. Address PO Box 1360; 978 North Crescent Road Roosevelt, UT 84066	3b. Phone No. (include area code) 435-722-4521	10. Field and Pool, or Exploratory Natural Buttes
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface 2,018' FNL & 2,157' FWL, SE/4 NW/4, At proposed prod. zone		11. Sec., T. R. M. or Blk. and Survey or Area Section 33, T10S, R19E, SLB&M
14. Distance in miles and direction from nearest town or post office* 13.94 miles southwest of Ouray, Utah		12. County or Parish Uintah
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 2,018'		13. State UT
16. No. of acres in lease 560		17. Spacing Unit dedicated to this well 40 acres
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 1,425'		20. BLM/BIA Bond No. on file UTB-000138
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5,312'		22. Approximate date work will start* 06/15/2009
		23. Estimated duration 14 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM. |

25. Signature <i>Don Hamilton</i>	Name (Printed/Typed) Don Hamilton	Date 09/26/2005
--------------------------------------	--------------------------------------	--------------------

Title
Agent for XTO Energy, Inc.

Approved by (Signature)	Name (Printed/Typed)	Date
-------------------------	----------------------	------

Title	Office
-------	--------

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

RECEIVED
MAR 02 2009
DIV. OF OIL, GAS & MINING

Diana:

Attached are some updated Form 3 APD cover pages for your review. These do not need to be processed because they are already permitted but we changed the operator name on them to reflect XTO Energy, Inc. rather than Dominion and thought they may make a good addition to your files.

Don Hamilton

RECEIVED
MAR 02 2009
DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

RECEIVED
VERNAL FIELD OFFICE

FORM APPROVED
OMB No. 1004-0137
Expires July 31, 2010

2009 FEB 23 PM 12:33

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU-49522
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name N/A
2. Name of Operator XTO Energy, Inc.		7. If Unit or CA Agreement, Name and No. N/A
3a. Address PO Box 1360; 978 North Crescent Road Roosevelt, UT 84066	3b. Phone No. (include area code) 435-722-4521	8. Lease Name and Well No. KC 6-33E
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface 2,018' FNL & 2,157' FWL, SE/4 NW/4, At proposed prod. zone		9. API Well No. 43-047-37195
14. Distance in miles and direction from nearest town or post office* 13.94 miles southwest of Ouray, Utah		10. Field and Pool, or Exploratory Natural Buttes
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 2,018'	16. No. of acres in lease 560	11. Sec., T. R. M. or Blk and Survey or Area Section 33, T10S, R19E, SLB&M
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 1,425'	19. Proposed Depth 9,500'	12. County or Parish Uintah
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5,312'	22. Approximate date work will start* 06/15/2009	13. State UT
17. Spacing Unit dedicated to this well 40 acres		
20. BLM/BIA Bond No. on file UTB-000138		
23. Estimated duration 14 days		

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the BLM.

25. Signature <i>Don Hamilton</i>	Name (Printed/Typed) Don Hamilton	Date 09/26/2005
--------------------------------------	--------------------------------------	--------------------

Title
Agent for XTO Energy, Inc.

Approved by (Signature) <i>Tommy Kevorka</i>	Name (Printed/Typed) Tommy Kevorka	Date APR 06 2009
---	---------------------------------------	---------------------

Title
Assistant Field Manager
Office
VERNAL FIELD OFFICE

Application approval does not constitute a certification that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

RECEIVED

APR 20 2009

DIV. OF OIL, GAS & MINING

NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED

NOS 07/13/05

UD06M



**UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE**

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: XTO Energy, Inc.
Well No: KC 6-33E
API No: 43-047-37195

Location: SENW, SEC.33,T10S,R19E
Lease No: UTU-49522
Agreement: N/A

Title	Name	Office Phone Number	Cell Phone Number
Petroleum Engineer:	Matt Baker	(435) 781-4490	(435) 828-4470
Petroleum Engineer:	Michael Lee	(435) 781-4432	(435) 828-7875
Petroleum Engineer:	Ryan Angus	(435) 781-4430	(435) 828-7368
Supervisory Petroleum Technician:	Jamie Sparger	(435) 781-4502	(435) 828-3913
Supervisory NRS:	Karl Wright	(435) 781-4484	
NRS/Enviro Scientist:	Holly Villa	(435) 781-4404	(435) 828-3544
NRS/Enviro Scientist:	James Hereford	(435) 781-3412	(435) 828-3546
NRS/Enviro Scientist:	Chuck Macdonald	(435) 781-4441	(435) 828-7481
NRS/Enviro Scientist:	Dan Emmett	(435) 781-3414	(435) 828-4029
NRS/Enviro Scientist:	Paul Percival	(435) 781-4493	(435) 828-7381
NRS/Enviro Scientist:	Anna Figueroa	(435) 781-3407	(435) 828-3548
NRS/Enviro Scientist:	Verlyn Pindell	(435) 781-3402	(435) 828-3547
NRS/Enviro Scientist:	Nathan Packer	(435) 781-3405	(435) 828-3545
NRS/Enviro Scientist:	David Gordon	(435) 781-4424	
NRS/Enviro Scientist:	Christine Cimiluca	(435) 781-4475	
NRS/Enviro Scientist:	Lori Ford	(435) 781-4406	

Fax: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Location Construction (Notify Environmental Scientist)	-	Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	-	Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	-	Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to running casing and cementing all casing strings.
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	-	Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

SURFACE USE PROGRAM CONDITIONS OF APPROVAL (COAs)

- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

SITE SPECIFIC CONDITIONS OF APPROVAL

- An Interim Surface Reclamation Plan for surface disturbance on the well pad, access road, and pipeline would be completed. At a minimum, this would include the Best Management Practice of the reshaping of the pad to the original contour to the extent possible; the re-spreading of the top soil up to the rig anchor points; and, reseeding the area using appropriate reclamation methods. The areas of the location not needed for production operations, including portions of the pad and the reserve pits, would have the stock piled top soil spread evenly over the reclaimed surface, and be seeded with the recommended seed mix shown below. If it is determined that this well site would be used as a multi-well site the interim reclamation would be delayed until all wells are constructed at the site.

Interim Reclamation seed mix

Siberian wheatgrass	<i>Agropyron sibiricum</i>	3 lbs. /acre
bottlebrush squirrel tail grass	<i>Sitanion hystrix</i>	2 lbs. /acre
shadscale	<i>Atriplex confertifolia</i>	2 lbs. /acre
forage kochia	<i>Kochia prostrata</i>	2 lbs. /acre
scarlet globemallow	<i>Spaeralcea coccinea</i>	1 lbs. /acre

- Following well plugging and abandonment, the location, access roads, pipelines, and other facilities shall be reclaimed. All disturbed surfaces shall be reshaped to approximate the original contour; the top soil re-spread over the surface; and, the surface re-vegetated. The surface of approved staging areas where construction activities did not occur may require disking or ripping and reseeding.

Special Status Fish Species

- The best method to avoid entrainment is to pump from an off-channel location – one that does not connect to the river during high spring flows. An infiltration gallery constructed in a BLM and Service approved location is best.
- If the pump head is located in the river channel where larval fish are known to occur, the following measures apply:
 - do not situate the pump in a low-flow or no-flow area as these habitats tend to concentrate larval fishes;
 - limit the amount of pumping, to the greatest extent possible, during that period of the year when larval fish may be present (see above); and
 - limit the amount of pumping, to the greatest extent possible, during the pre-dawn hours as larval drift studies indicate that this is a period of greatest daily activity.
- Screen all pump intakes with ¼" mesh material.

**DOWNHOLE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

SITE SPECIFIC DOWNHOLE COAs:

- Production casing cement shall be brought up and into the surface casing. The minimum cement top is 200 ft above the surface casing shoe.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person

making the report (along with a telephone number) should the BLM need to obtain additional information.

- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or

data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-49522
---	--

SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME:
--	--

1. TYPE OF WELL Oil Well	8. WELL NAME and NUMBER: KC 6-33E
------------------------------------	---

2. NAME OF OPERATOR: XTO ENERGY INC	9. API NUMBER: 43047371950000
---	---

3. ADDRESS OF OPERATOR: 382 Road 3100 , Aztec, NM, 87410	PHONE NUMBER: 505 333-3159 Ext	9. FIELD and POOL or WILDCAT: NATURAL BUTTES
--	--	--

4. LOCATION OF WELL FOOTAGES AT SURFACE: 2018 FNL 2157 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SENW Section: 33 Township: 10.0S Range: 19.0E Meridian: S	COUNTY: UINTAH STATE: UTAH
---	---

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 10/30/2010 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: _____

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

XTO hereby requests a one year Extension on the State Permit for the referenced well.

Approved by the Utah Division of Oil, Gas and Mining

Date: October 26, 2009

By:

NAME (PLEASE PRINT) Eden Fine	PHONE NUMBER 505 333-3664	TITLE Permitting Clerk
SIGNATURE N/A		DATE 10/22/2009



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047371950000

API: 43047371950000

Well Name: KC 6-33E

Location: 2018 FNL 2157 FWL QTR SENW SEC 33 TWNP 100S RNG 190E MER S

Company Permit Issued to: XTO ENERGY INC

Date Original Permit Issued: 9/29/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Eden Fine **Date:** 10/22/2009
Title: Permitting Clerk **Representing:** XTO ENERGY INC

Date: October 26, 2009
By: 

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-49522
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Oil Well	8. WELL NAME and NUMBER: KC 6-33E
2. NAME OF OPERATOR: XTO ENERGY INC	9. API NUMBER: 43047371950000
3. ADDRESS OF OPERATOR: 382 Road 3100 , Aztec, NM, 87410	PHONE NUMBER: 505 333-3159 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2018 FNL 2157 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SENW Section: 33 Township: 10.0S Range: 19.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 9/28/2011 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

XTO hereby requests a one (1) year extension on the State Permit for the referenced well.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: September 29, 2010

By: 

NAME (PLEASE PRINT) Kelly Small	PHONE NUMBER 505 333-3145	TITLE Sr. Permitting Tech
SIGNATURE N/A		DATE 9/28/2010



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047371950000

API: 43047371950000

Well Name: KC 6-33E

Location: 2018 FNL 2157 FWL QTR SENW SEC 33 TWNP 100S RNG 190E MER S

Company Permit Issued to: XTO ENERGY INC

Date Original Permit Issued: 9/29/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Kelly Small

Date: 9/28/2010

Title: Sr. Permitting Tech **Representing:** XTO ENERGY INC

Date: September 29, 2010

By: 

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. UTU 49522
2. Name of Operator XTO Energy Inc.		6. If Indian, Allottee or Tribe Name N/A
3a. Address 382 CR 3100 Aztec, NM 87410	3b. Phone No. (include area code) 505-333-3100	7. If Unit or CA/Agreement, Name and/or No. N/A
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 2018' ENL & 2157' FWL SENW SEC 33-T10S-R19E		8. Well Name and No. KC 6-33E
		9. API Well No. 43-047-37195
		10. Field and Pool, or Exploratory Area Natural Buttes
		11. County or Parish, State UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>APD EXT.</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the final site is ready for final inspection.)

XTO Energy Inc., would like to request a two (2) year extension on the existing APD.

RECEIVED

FEB 03 2011

BLM VERNAL, UTAH

RECEIVED

MAR 14 2011

CONDITIONS OF APPROVAL ATTACHED

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct Name (Printed/Typed) Krista Wilson	Title Permitting Tech.
Signature <i>Krista Wilson</i>	Date 02/01/2011

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by <i>[Signature]</i>	Title Assistant Field Manager Lands & Mineral Resources	Date FEB 15 2011
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office VERNAL FIELD OFFICE

UDOGM

CONDITIONS OF APPROVAL

XTO Energy Inc.

Notice of Intent APD Extension

Lease: UTU-49522
Well: KC 6-33E
Location: SENW Sec 33-T10S-R19E

An extension for the referenced APD is granted with the following conditions:

1. The extension and APD shall expire on 4/6/13.
2. No other extension shall be granted.

If you have any other questions concerning this matter, please contact Carey Doyle of this office at (435) 781-3406

CONDITIONS OF APPROVAL

XTO Energy Inc.

Notice of Intent APD Extension

Lease: UTU-49522
Well: KC 6-33E
Location: SENW Sec 33-T10S-R19E

An extension for the referenced APD is granted with the following conditions:

1. The extension and APD shall expire on 4/6/13.
2. No other extension shall be granted.

If you have any other questions concerning this matter, please contact Carey Doyle of this office at (435) 781-3406

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-49522
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Oil Well	8. WELL NAME and NUMBER: KC 6-33E
2. NAME OF OPERATOR: XTO ENERGY INC	9. API NUMBER: 43047371950000
3. ADDRESS OF OPERATOR: 382 Road 3100 , Aztec, NM, 87410	PHONE NUMBER: 505 333-3159 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2018 FNL 2157 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SENW Section: 33 Township: 10.0S Range: 19.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 9/12/2011 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 50px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
 XTO Energy hereby requests a one (1) year extension of the State APD for the referenced well.

Approved by the Utah Division of Oil, Gas and Mining

Date: 09/14/2011

By:

NAME (PLEASE PRINT) Krista Wilson	PHONE NUMBER 505 333-3647	TITLE Permitting Tech
SIGNATURE N/A	DATE 9/12/2011	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047371950000

API: 43047371950000

Well Name: KC 6-33E

Location: 2018 FNL 2157 FWL QTR SENW SEC 33 TWNP 100S RNG 190E MER S

Company Permit Issued to: XTO ENERGY INC

Date Original Permit Issued: 9/29/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Krista Wilson

Date: 9/12/2011

Title: Permitting Tech **Representing:** XTO ENERGY INC

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-49522
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Oil Well	8. WELL NAME and NUMBER: KC 6-33E
2. NAME OF OPERATOR: XTO ENERGY INC	9. API NUMBER: 43047371950000
3. ADDRESS OF OPERATOR: 382 Road 3100 , Aztec, NM, 87410	PHONE NUMBER: 505 333-3145 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2018 FNL 2157 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SENW Section: 33 Township: 10.0S Range: 19.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 7/31/2013	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

XTO Energy requests a one (1) year extension of the State APD for the referenced well.

Approved by the Utah Division of Oil, Gas and Mining

Date: September 13, 2012

By: 

NAME (PLEASE PRINT) Richard L. Redus	PHONE NUMBER 303 397-3712	TITLE Regulatory
SIGNATURE N/A	DATE 9/11/2012	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047371950000

API: 43047371950000

Well Name: KC 6-33E

Location: 2018 FNL 2157 FWL QTR SENW SEC 33 TWP 100S RNG 190E MER S

Company Permit Issued to: XTO ENERGY INC

Date Original Permit Issued: 9/29/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

Signature: Richard L. Redus

Date: 9/11/2012

Title: Regulatory

Representing: XTO ENERGY INC

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-49522
1. TYPE OF WELL Oil Well	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME:
2. NAME OF OPERATOR: XTO ENERGY INC	8. WELL NAME and NUMBER: KC 6-33E
3. ADDRESS OF OPERATOR: PO Box 6501 , Englewood, CO, 80155	9. API NUMBER: 43047371950000
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2018 FNL 2157 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SENW Section: 33 Township: 10.0S Range: 19.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA	


TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 6/29/2014	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

XTO Energy requests a one (1) year extension of the State APD for the referenced well.

Approved by the Utah Division of Oil, Gas and Mining

Date: September 17, 2013

By: 

NAME (PLEASE PRINT) Sephra Baca	PHONE NUMBER 719 845-2103	TITLE Regulatory Analyst
SIGNATURE N/A		DATE 9/12/2013



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047371950000

API: 43047371950000

Well Name: KC 6-33E

Location: 2018 FNL 2157 FWL QTR SENW SEC 33 TWP 100S RNG 190E MER S

Company Permit Issued to: XTO ENERGY INC

Date Original Permit Issued: 9/29/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Sephra Baca

Date: 9/12/2013

Title: Regulatory Analyst Representing: XTO ENERGY INC



United States Department of the Interior



BUREAU OF LAND MANAGEMENT

Green River District
Vernal Field Office
170 South 500 East
Vernal, UT 84078

<http://www.blm.gov/ut/st/en/fo/vernal.html>

JAN 24 2014

IN REPLY REFER TO:
3160 (UTG011)

Rick Redus
XTO Energy, Inc.
PO Box 6501
Englewood, CO 80155

43 047 37195

Re: Notice of Expiration
Well No. KC 6-33E
SENW, Sec. 33, T10S, R19E
Uintah County, Utah
Lease No. UTU-49522

RECEIVED

FEB 14 2014

DIV. OF OIL, GAS & MINING

Dear Mr. Redus:

The Application for Permit to Drill (APD) for the above-referenced well was approved on April 6, 2009. A two (2) year extension of the original APD was requested. The request was reviewed and the extension approved until April 6, 2013. According to our records, no known activity has transpired at the approved location. In view of the foregoing, this office is notifying you that the approval of the referenced application has expired. If you intend to drill at this location in the future, a new Application for Permit to Drill must be submitted.

This office requires a letter confirming that no surface disturbance has been made for this drill site. Any surface disturbance associated with the approved location of this well is to be rehabilitated. A schedule for this rehabilitation must be submitted to this office. Your co-operation in this matter is appreciated.

If you have any questions regarding this matter, please contact Robin R. Hansen at (435) 781-3428.

Sincerely,

/s/ Jerry Kenczka

Jerry Kenczka
Assistant Field Manager
Lands & Mineral Resources

cc: UDOGM

bcc: Well File
I&E Asst.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS	
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	
1. TYPE OF WELL Oil Well	5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-49522
2. NAME OF OPERATOR: XTO ENERGY INC	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: PO Box 6501 , Englewood, CO, 80155	7. UNIT or CA AGREEMENT NAME:
PHONE NUMBER: 303 397-3727 Ext	8. WELL NAME and NUMBER: KC 6-33E
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2018 FNL 2157 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SENW Section: 33 Township: 10.0S Range: 19.0E Meridian: S	9. API NUMBER: 43047371950000
	9. FIELD and POOL or WILDCAT: NATURAL BUTTES
	COUNTY: UINTAH
	STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 9/30/2014	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

XTO Energy requests a one (1) year extension of the State APD for the referenced well.

Approved by the
September 23, 2014
Oil, Gas and Mining

Date: _____

By: 

NAME (PLEASE PRINT) Malia Villers	PHONE NUMBER 303 397-3670	TITLE Lead Permitting Analyst
SIGNATURE N/A	DATE 9/18/2014	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047371950000

API: 43047371950000

Well Name: KC 6-33E

Location: 2018 FNL 2157 FWL QTR SENW SEC 33 TWP 100S RNG 190E MER S

Company Permit Issued to: XTO ENERGY INC

Date Original Permit Issued: 9/29/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Malia Villers

Date: 9/18/2014

Title: Lead Permitting Analyst Representing: XTO ENERGY INC



GARY R. HERBERT
Governor

SPENCER J. COX
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

October 1, 2015

Malia Villers
XTO Energy Inc.
9127 South Jamaica St.
Englewood, CO 80112

Re: APDs Rescinded for XTO Energy Inc., Uintah County


Dear Ms. Villers:

Enclosed find the list of APDs that you asked to be rescinded. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded effective September 30, 2015.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

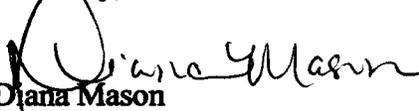
Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal

LCU 2-17H	43-047-37059
HCU 15-29F	43-047-35938
Big Pack U 9-28H	43-047-53113
KC 6-33E	43-047-37195
KC 9-33E	43-047-37196
KC 11-33E	43-047-37197