

EOG Resources, Inc.
P.O. 1910
Vernal, UT 84078

October 4, 2005

Utah Division of Oil, Gas, & Mining
1594 West North Temple, Suite 1210
P.O. Box 145801
Salt Lake City, UT 84114-5801

RE: APPLICATION FOR PERMIT TO DRILL
NORTH CHAPITA 267-5
SE/SW, SEC. 5, T9S, R22E
UINTAH COUNTY, UTAH
LEASE NO.: U-41370
UTE INDIAN TRIBAL LANDS

Enclosed please find a copy of the Application for Permit to Drill and associated attachments for the referenced well.

Please address further communication regarding this matter (including approval) to:

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Phone: (435)789-4120
Fax: (435)789-1420

Sincerely,



Ed Trotter
Agent
EOG Resources, Inc.

Attachments

RECEIVED

OCT 13 2005

N. Chapita 267-5 B

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT


APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. U-41370
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name UTE INDIAN TRIBE
2. Name of Operator EOG RESOURCES, INC.		7. If Unit or CA Agreement, Name and No.
3a. Address P.O. BOX 1815 VERNAL, UT 84078		8. Lease Name and Well No. NORTH CHAPITA 267-5
3b. Phone No. (Include area code) (435)789-0790		9. API Well No. 43-047-37251
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface 695' FSL, 1970' FWL 630868X 40.059701 SE/SW At proposed prod. Zone 4435301Y -109.465594		10. Field and Pool, or Exploratory NATURAL BUTTES
14. Distance in miles and direction from nearest town or post office* 13.35 MILES SOUTHEAST OF OURAY, UTAH		11. Sec., T., R., M., or Blk. and Survey or Area SEC. 5, T9S, R22E, S.L.B.&M.
15. Distance from proposed* location to nearest property or lease line, ft. 695' (Also to nearest drig. Unit line, if any)	16. No. of Acres in lease 524	12. County or Parish UINTAH
17. Spacing Unit dedicated to this well 40	13. State UTAH	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. See Topo Map C	19. Proposed Depth 10,125'	20. BLM/BIA Bond No. on file NM-2308
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 4795.8 FEET GRADED GROUND	22. Approximate date work will start* UPON APPROVAL	23. Esti mated duration 45 DAYS
24. Attachments		

Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification.
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature 	Name (Printed/Typed) Ed Trotter	Date October 4, 2005
Title Agent	Federal Approval of this Action is Necessary	
Approved by (Signature) 	Name (Printed/Typed) BRADLEY G. HILL ENVIRONMENTAL SCIENTIST III	Date 10-18-05
Title	Office	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of Approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)

RECEIVED


OCT 13 2005

DEPT. OF OIL, GAS & MINING

T9S, R22E, S.L.B.&M.

EOG RESOURCES, INC.

Well location, NORTH CHAPITA #267-5, located as shown in the SE 1/4 SW 1/4 of Section 5, T9S, R22E, S.L.B.&M. Uintah County, Utah.

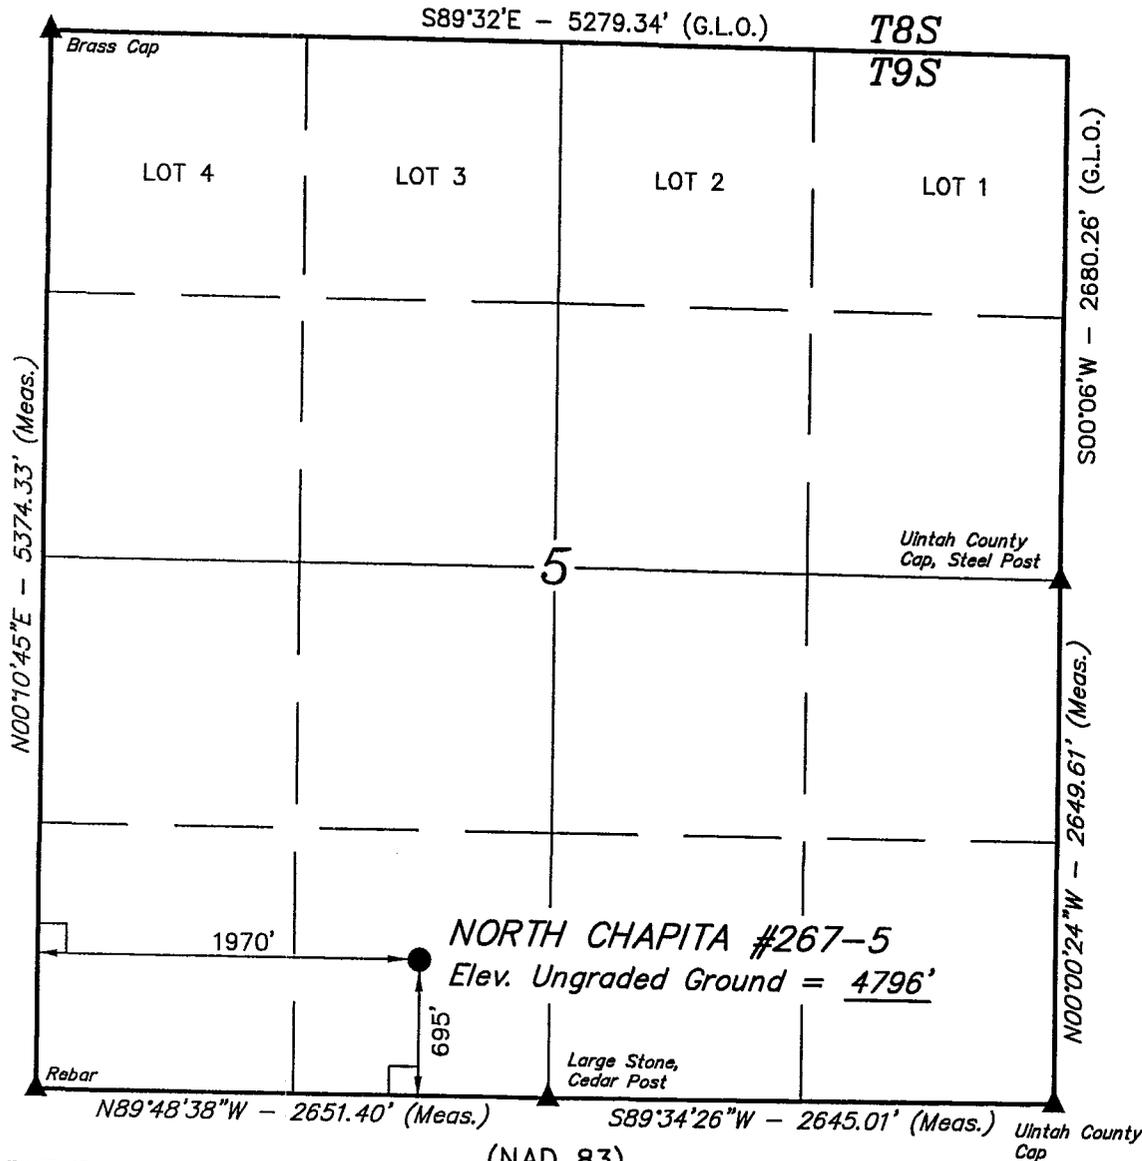


BASIS OF ELEVATION

BENCH MARK 20EAM LOCATED IN THE SE 1/4 OF SECTION 35, T8S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE, QUADRANGLE UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4697 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

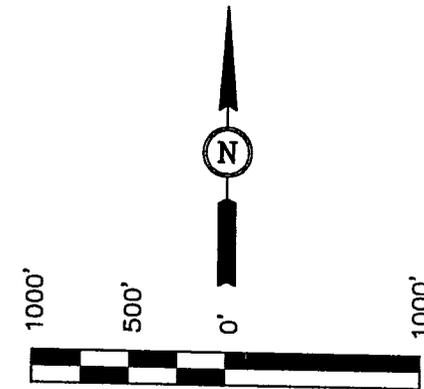

SCALE CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Robert H. ...
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 161319
 STATE OF UTAH

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)
 LATITUDE = 40°03'34.74" (40.059650)
 LONGITUDE = 109°27'58.67" (109.466297)
 (NAD 27)
 LATITUDE = 40°03'34.87" (40.059686)
 LONGITUDE = 109°27'56.20" (109.465611)

UINTAH ENGINEERING & LAND SURVEYING		
85 SOUTH 200 EAST - VERNAL, UTAH 84078		
(435) 789-1017		
SCALE 1" = 1000'	DATE SURVEYED: 01-04-05	DATE DRAWN: 01-19-05
PARTY G.S. D.C. D.R.B.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE EOG RESOURCES, INC.	

EIGHT POINT PLAN

NORTH CHAPITA 267-5
SE/SW, SEC. 5, T9S, R22E, S.L.B.&M.
UINTAH COUNTY, UTAH

1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:

FORMATION	DEPTH (KB)
Green River	2,361'
Wasatch	5,164'
Chapita Wells	5,807'
Buck Canyon	6,477'
North Horn	7,106'
Island	7,621'
KMV Price River	8,069'
KMV Price River Middle	8,735'
KMV Price River Lower	9,548'
Sego	10,013'

EST. TD: 10,125'

Anticipated BHP 4400 PSI

3. PRESSURE CONTROL EQUIPMENT:

Intermediate Hole – 3000 PSIG
Production Hole – 3000 PSIG
BOP Schematic Diagrams attached.

4. CASING PROGRAM:

<u>HOLE SIZE</u>	<u>INTERVAL</u>	<u>LENGTH</u>	<u>SIZE</u>	<u>WEIGHT</u>	<u>GRADE</u>	<u>THREAD</u>	<u>RATING FACTOR</u>		
							<u>COLLAPSE</u>	<u>BURST</u>	<u>TENSILE</u>
17 1/2"	0' – 250'	250'	13 3/8"	48.0#	H-40	STC	770 PSI	1730 PSI	322,000#
12 1/4"	250' - 2300' +/- KB	2300' +/-	9 5/8"	36.0 #	J-55	ST&C	2020 PSI	3520 PSI	394,000#
7 7/8"	2300' – TD +/-KB	10,125' +/-	4 1/2"	11.6 #	N-80	LT&C	6350 PSI	7780 PSI	223,000#

Note: The 12 1/4" Intermediate hole will be drilled to a total depth of 200' below the base of the Green River lost circulation zone and 9 5/8" casing will be set to that depth. Actual setting depth of the 9 5/8" casing may be less than 2300' in this well.

All casing will be new or inspected.

5. Float Equipment:

Surface Hole Procedure (0-250' Below GL):

Guide Shoe
Insert Baffle
Wooden wiper plug
Centralizers: 1 – 5-10' above shoe, every collar for next 3 joints (4 total).

Intermediate Hole Procedure (250' ±2300')

Guide Shoe
Insert Float Collar (PDC drillable)
Cents.: 1-5' above shoe, top of jts. #2 and #3 then every 5th joint to surface. (15 total)

EIGHT POINT PLAN

NORTH CHAPITA 267-5 SE/SW, SEC. 5, T9S, R22E, S.L.B.&M. UINTAH COUNTY, UTAH

Float Equipment (Continued):

Production Hole Procedure (\pm 2300'-TD):

FS, 1 joint of casing, FC, and balance of casing to surface. Run 11.6#, N-80 burst rating or equivalent marker collars or short casing joints at \pm 8,069' (Top of Price River) and \pm 4,700' (400' above the Wasatch) (alter depth if needed to avoid placing across any potentially-productive intervals). Centralize 5' above shoe on joint #1, top of joint #2, then every 2nd joint to 400' above Price River top (50 total). Thread lock FS, top and bottom of FC, and top of 2nd joint.

6. MUD PROGRAM

Surface Hole Procedure (0-250' below GL):

Air – Air Water Mist

Intermediate Hole Procedure (250'- \pm 2300'):

Water (circulate through reserve pit) with Gel/LCM sweeps.

Production Hole Procedure (\pm 2300'-TD):

\pm 2300-7500' Use water (circulated through reserve pit) with PHPA polymer sweeps on a regular basis. Adjust frequency of sweeps based on cuttings quality and hole conditions. Gel/LCM sweeps can also be used for additional cleaning and for reducing seepage, but should not be "substituted" for the PHPA sweeps.

While on water, spot either salt water or pre-mixed weighted mud as required to prevent flow during trips after gas influxes have been encountered. Watch cuttings size, shape and quantity to determine if increase in mud weight is required. Increased mud weight is often the key to shale stability in this area. Treat for any CO₂ contamination with Lime and Gyp.

7500'- TD' Close mud system in. "Mud up" with Hi-Yield bentonite for primary viscosity and PHPA polymer for supplemental viscosity and clay encapsulation/inhibition. Utilize white Starch or PAC for filtration control. Treat with bactericide if required. Maintain pH in 9.0-10.0 range.

Expect increasing gas influxes requiring heavier mud weights as drilling progresses. Adjust mud weight as needed. Use deflocculants/thinners if required to maintain good flow properties.

Run LCM sweeps periodically to seal-off loss zones. Adjust sweep frequency based on observed losses. Maintain water loss 15 cc's or less. Treat CO₂ contamination with Lime and/or Gypsum.

EIGHT POINT PLAN

NORTH CHAPITA 267-5
SE/SW, SEC. 5, T9S, R22E, S.L.B.&M.
UINTAH COUNTY, UTAH

7. VARIANCE REQUESTS:

- A. EOG Resources, Inc. requests a variance to regulations requiring a straight run blooie line (Where possible, a straight run blooie line will be used).
- B. EOG Resources, Inc. requests a variance to regulations requiring an automatic ignitor or continuous pilot light on the blooie line. (Not required on aerated water system).
- C. EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. To reduce location excavation, the blooie line will be 75' in length.

8. EVALUATION PROGRAM:

Logs: No Open Hole Logs
Cased Hole Logs.

9. CEMENT PROGRAM:

Surface Hole Procedure (0-250' Below GL)

Lead: 300 sks (100% excess volume) Class 'G' cement with 2% S1 (CaCl₂) & 0.25 pps D29 (cellophane flakes), mixed at 15.8 ppg, 1.16 ft³/sk., 4.95 gps water.

Top Out: Top out with Class 'G' cement with 2% S1 (CaCl₂) in mix water, 15.8 ppg, 1.16 ft³/sk., 4.95 gps via 1" tubing set at 25' if needed.

Intermediate Hole Procedure (250'-± 2300'):

Option #1

Lead: 85 sks: (50% excess volume) Class 'G' lead cement (coverage from 1700-1000') with 5% D44 (Salt), 12% D20 (Bentonite), 1% D79% (Extender), 0.25% D112 (Fluid Loss Additive), 0.2% D46 (Anti-Foamer) & 0.25 pps D29 (Cellophane flakes) mixed at 11.0 ppg, 3.91 ft³/sk., 24.5 gps water:

Tail: 290 sks: (50% excess volume) Class 'G' cement (coverage from 2700-1700') with 10% D53 (Gypsum), 2% S1 (CaCl₂) & 0.25 pps D29 (Cellophane flakes) mixed at 14.2 ppg, 1.61 ft³/sk., 7.9 gps water.

Option 2:

Lead: 210 sks: (60% excess volume) Class 'G' lead cement (coverage from 2300-1800') with 2% BWOC (Calcium Chloride), ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft³/sk., 5.2 gps water.

Tail: 720 sks: (60% excess volume) Class 'G' cement (coverage from 1800'-Surface) with 2% BWOC (Calcium Chloride), ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft³/sk., 5.2 gps water.

EIGHT POINT PLAN

NORTH CHAPITA 267-5
SE/SW, SEC. 5, T9S, R22E, S.L.B.&M.
UINTAH COUNTY, UTAH

CEMENT PROGRAM (Continued):

Production Hole Procedure (\pm 2300' to TD)

Lead: 110 sks 35:65 Poz G w/ 4% D20 (Bentonite), 2% D174 (Extender), 0.2% D65 (Dispersant), 0.2% D46 (Antifoam), 0.75% D112 (Fluid Loss Additive), 0.15% D13 (Retarder), 0.25 pps D29 (cello flakes), mixed at 13.0 ppg, 1.73 ft³/sk., 9.06 gps water

Tail: 190 sks: 50:50 Poz G w/ 2% D20 (Bentonite), 0.1% D46 (Antifoam), 0.15% D13 (Retarder), 0.2% D167 (Fluid Loss Additive), 0.2% D65 (Dispersant), mixed at 14.1 ppg, 1.28 ft³/sk., 5.9 gps water.

10. ABNORMAL CONDITIONS:

Intermediate Hole (250'- \pm 2300'):

Lost circulation

Production Hole (\pm 2300'-TD):

Sloughing shales and key seat development are possible in the Wasatch Formation.

11. STANDARD REQUIRED EQUIPMENT:

- A. Choke Manifold
- B. Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

12. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.


(Attachment: BOP Schematic Diagram)

3000 PSIG DIAGRAM

ANNULAR PREVENTOR AND BOTH RAMS ARE 3000 PSIG RATED.
 CASING FLANGE IS 11" 3000 PSIG RATED.
 BOPE 11" 3000 PSIG

TESTING PROCEDURE:

1. BOPE's will be tested with a professional tester to conform to Onshore Order #2 with retest every 14 days.
2. Blind & Pipe rams will be tested to rated working pressure, 3000 psig.
3. Annular preventor will be tested to 50% of working pressure, 1500 psig.
4. Casing will be tested to 0.22 psi/ft. or 1500 psig. Not to exceed 70% of burst strength, whichever is greater.
5. All lines subject to well pressure will be pressure-tested to the same pressure as blind & pipe rams.
6. All BOPE specifications and configurations will meet Onshore Order #2 requirements for 3000 psig BOPE specifications.

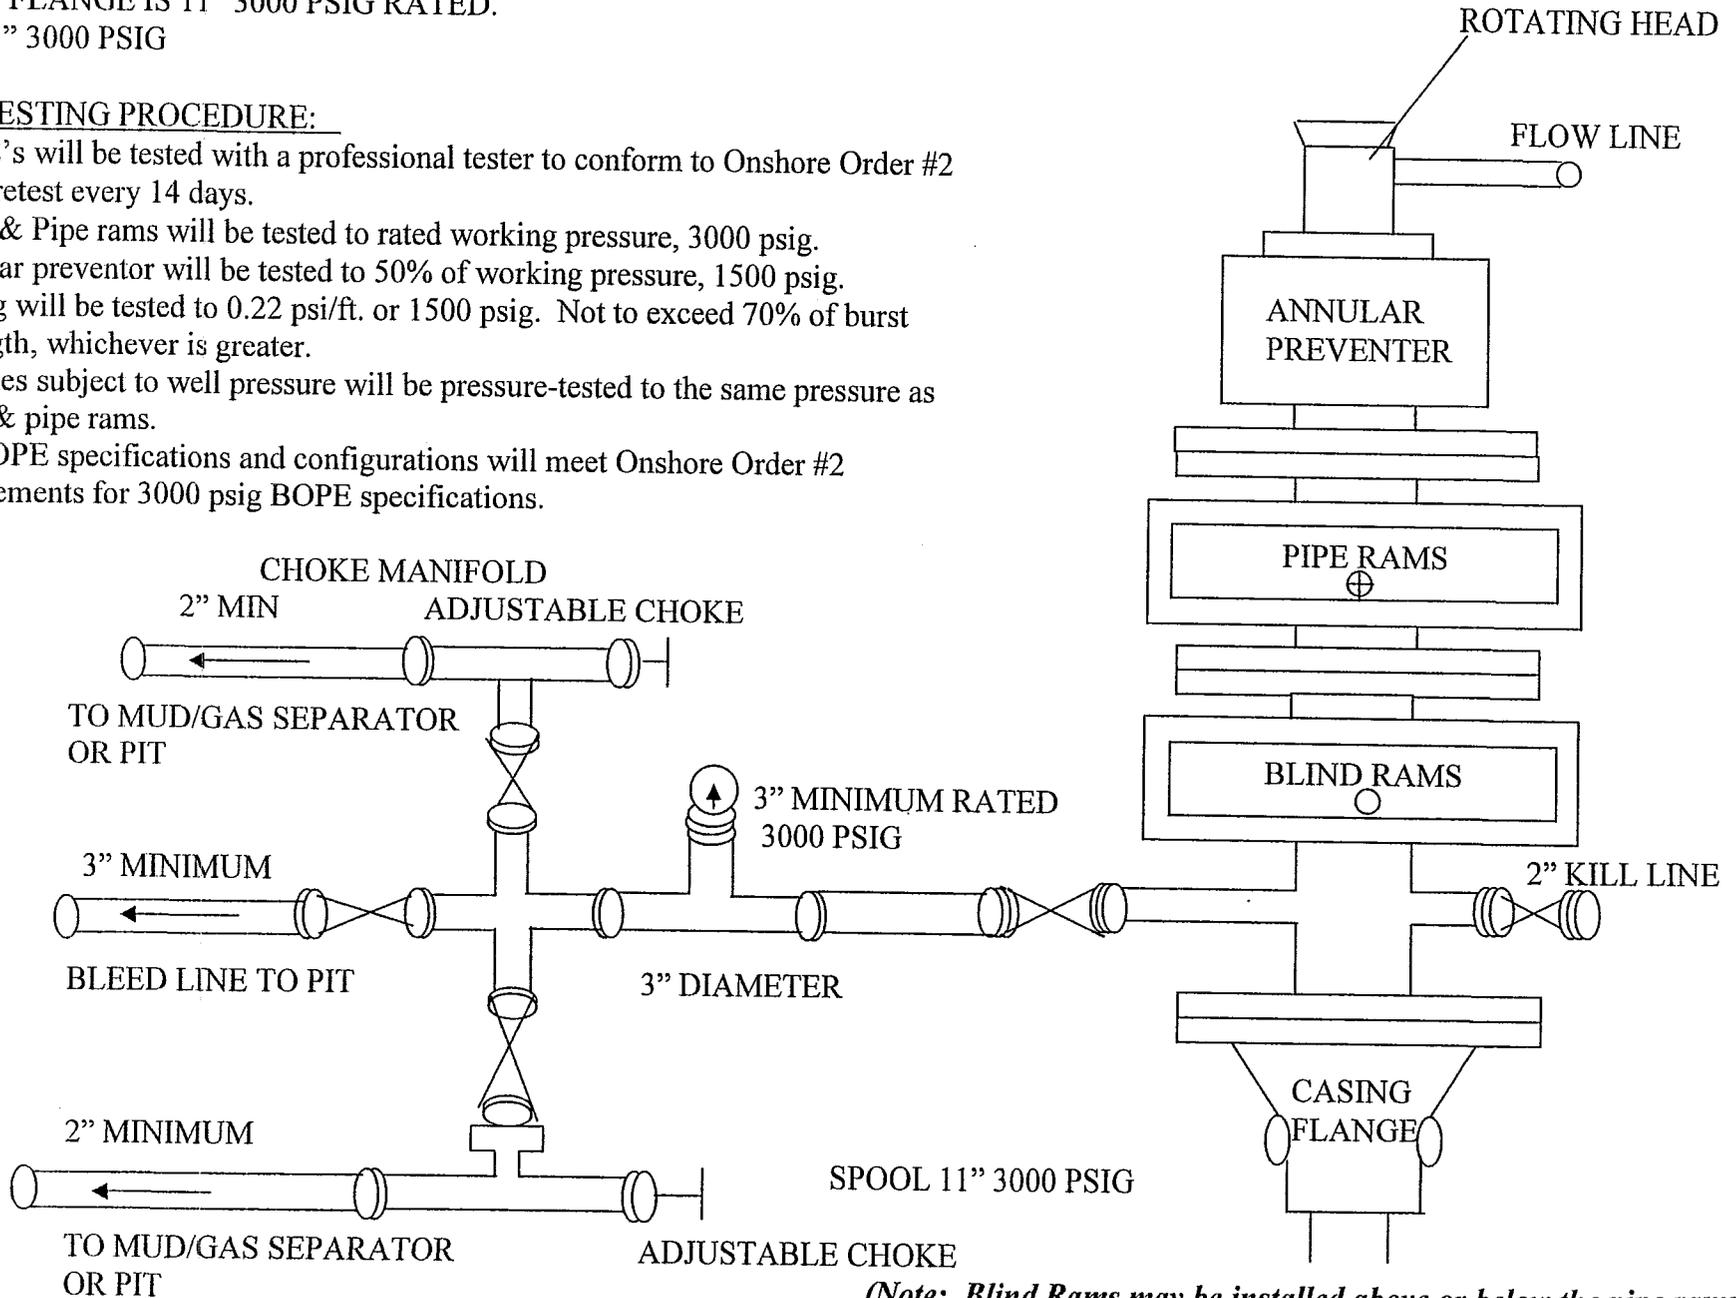

(Note: Blind Rams may be installed above or below the pipe rams)

**CONDITIONS OF APPROVAL
FOR THE SURFACE USE PROGRAM OF THE
APPLICATION FOR PERMIT TO DRILL**

Company/Operator: EOG Resources, Inc.
Well Name & Number: North Chapita 267-5
Lease Number: U-41370
Location: 695' FSL & 1970' FWL, SE/SW, Sec. 5,
T9S, R22E, S.L.B.&M., Uintah County
Surface Ownership: Ute Indian Tribe

NOTIFICATION REQUIREMENTS

Location Construction - forty-eight (48) hours prior to construction of location and access roads.

Location Completion - prior to moving on the drilling rig.

Spud Notice: - at least twenty-four (24) hours prior to spudding the well.

Casing String and
Cementing - twenty-four (24) hours prior to running casing and cementing all casing strings.

BOP and related
Equipment Tests - twenty-four (24) hours prior to running casing and tests.

First Production
Notice - within five (5) business days after new Well begins or production resumes after Well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

THIRTEEN POINT SURFACE USE PROGRAM

1. EXISTING ROADS

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 13.35 miles southeast of Ouray, Utah - See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

2. PLANNED ACCESS ROAD

- A. The access road will be approximately 250 feet in length. See attached TOPO Map "B".
- B. The access road has a 30 foot ROW w/ 18 foot running surface.
- C. Maximum grade on access road will be 8%.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No culverts, bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

All travel will be confined to existing access road Right-of-Way. Access roads and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service Publication: Surface Operating Standards For Oil & Gas Exploration and Development, (1989).

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of-Way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of

drainage ditches by run off water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, EOG Resources, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

3. **LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION**

A. Abandoned wells - 5*

B. Producing wells - 34*

(*See attached TOPO map "C" for location)

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

A. **ON WELL PAD**

1. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of well head valves, separator, dehy, 210 Bbl condensate tank, meter house, and attached piping.
2. Gas gathering lines - A 4" gathering line will be buried from dehy to the edge of the location.

B. **OFF WELL PAD**

1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
2. A 4" OD steel above ground natural gas pipeline will be laid approximately 487' from proposed location to a point in the SE/SW of Section 5, T9S, R22E, where it will tie into Questar Pipeline Co.'s existing line. Proposed pipeline crosses BIA administered lands, thus a Right-of-Way grant will be required.
3. Proposed pipeline will be a 4" OD steel, welded line laid on the surface.
4. Protective measures and devices for livestock and wildlife will be taken and/or installed where required.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery, unless more stringent protective requirements are deemed necessary by the authorized officer.

The production facilities will be placed on the Southwest side of the location.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities required will be painted within 6 months of installation. Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

The required paint color is Carlsbad Canyon.

If at any time the facilities located on public land and authorized by the terms of the lease are no longer included in the lease (due to a construction in the unit or other lease or unit boundary change), the BIA will process a change in authorization to the appropriate rental or other financial obligation as determined by the authorized officer.

5. **LOCATION & TYPE OF WATER SUPPLY**

- A. Water supply will be from the Ouray Brine Plant at Ouray, Utah, and/or Target Trucking Inc.'s water source in the SW/SW, Sec. 35, T9S, R22E, Uintah County, Utah (State Water Right #49-1501). Produced water from the Chapita Wells and Stagecoach Units will also be used.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. **SOURCE OF CONSTRUCTION MATERIAL**

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of the location.
- B. All construction material will come from Tribal Land.
- C. No mineral materials will be required.

7. **METHODS OF HANDLING WASTE DISPOSAL**

A. METHODS AND LOCATION

- 1. Cuttings will be confined in the reserve pit.
- 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
- 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah County landfill.
- 4. Produced wastewater will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. After the 90

day period, the produced water will be contained in a tank on location and then disposed of at one of the following three locations: Natural Buttes Unit 21-20B SWD, Ace Disposal, or EOG Resources, Inc. drilling operations (Chapita Wells Unit, Natural Buttes Unit & Stagecoach Unit).

5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.

- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit or be removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

On BIA administered land:

The reserve pit will be constructed so as not to leak, break, or allow discharge. If the reserve pit requires padding prior to lining (due to rocky conditions) felt padding will be used.

The reserve pit shall be lined with a plastic liner. A felt liner will also be installed if rock is encountered during pit construction.

8. **ANCILLARY FACILITIES**

- A. No airstrips or camps are planned for this well.

9. **WELLSITE LAYOUT**

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The reserve pit will be located on the East side of the location. The flare pit will be located downwind of the prevailing wind direction on the Southeast side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled topsoil will be stored between Corners #2 and #8.

Access to the well pad will be from the North.

FENCING REQUIREMENTS:

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until cleanup.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BIA or SMA specifications. A cattleguard with an adjacent 16-foot gate shall be installed in any fence where a road is to be regularly traveled. If the well is a producer, the cattleguards (shall/shall not) be permanently mounted on concrete bases. Prior to crossing any fence located on Tribal land, or any fence between Tribal land and private land, the operator will contact the BIA, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

10. PLANS FOR RESTORATION OF SURFACE

A. PRODUCING LOCATION

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 12 months from the date of well completion. Before any dirt work takes place, the reserve pit will be

completely dry and all cans, barrels, pipe, fluid, and hydrocarbons, will be removed.

Contact appropriate surface management agency for required seed mixture.

B. DRY HOLE/ABANDONED LOCATION

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BIA will attach the appropriate surface rehabilitation conditions of approval.

11. SURFACE OWNERSHIP

Access road: Tribal

Location: Tribal

12. OTHER INFORMATION

A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to:

- whether the materials appear eligible for the National Register of Historic Places;
- the mitigation measures the operator will likely have to undertake before the site can be used.
- a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs.

The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

B. As operator, EOG Resources, Inc. will control noxious weeds

along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BIA, or the appropriate County Extension Office. On BIA administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.

- C. The drilling rig and ancillary equipment will be removed from the location prior to commencement of completion operations. Completion operations will be conducted utilizing a completion/workover rig.
- D. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on Tribal Lands after the conclusion of drilling operations or at any other time without BIA authorization. However, if BIA authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BIA does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

Additional Surface Stipulations

None

LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION

PERMITTING AGENT

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Telephone: (435)789-4120
Fax: (435)789-1420

DRILLING OPERATIONS

Donald Presenkowski
EOG Resources, Inc.
P.O. Box 250
Big Piney, WY 83113
Telephone: (307)276-4865

All lease or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. EOG Resources, Inc. is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.


The BIA office shall be notified upon site completion prior to moving on the drilling rig.

Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions that presently exist; that the statements made in the Plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by EOG Resources, Inc. and its contractors and subcontractors in conformity with this Plan and the terms and conditions under which it is approved.

Please be advised that EOG Resources, Inc. is considered to be the operator of the **North Chapita 267-5 Well, located in the SE/SW of Section 5, T9S, R22E, Uintah County, Utah; Lease #U-41370;** and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond Coverage is provided under Bond #NM 2308.

10-4-2005
Date


Agent

EOG RESOURCES, INC.
NORTH CHAPITA #267-5
SECTION 5, T9S, R22E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 0.3 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 12.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 0.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHWEST; TURN RIGHT AND PROCEED IN A NORTHWESTERLY DIRECTION APPROXIMATELY 0.4 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE SOUTHWEST; FOLLOW ROAD FLAGS IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 250' TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 44.35 MILES.

EOG RESOURCES, INC.

NORTH CHAPITA #267-5

LOCATED IN UINTAH COUNTY, UTAH

SECTION 5, T9S, R22E, S.L.B.&M.

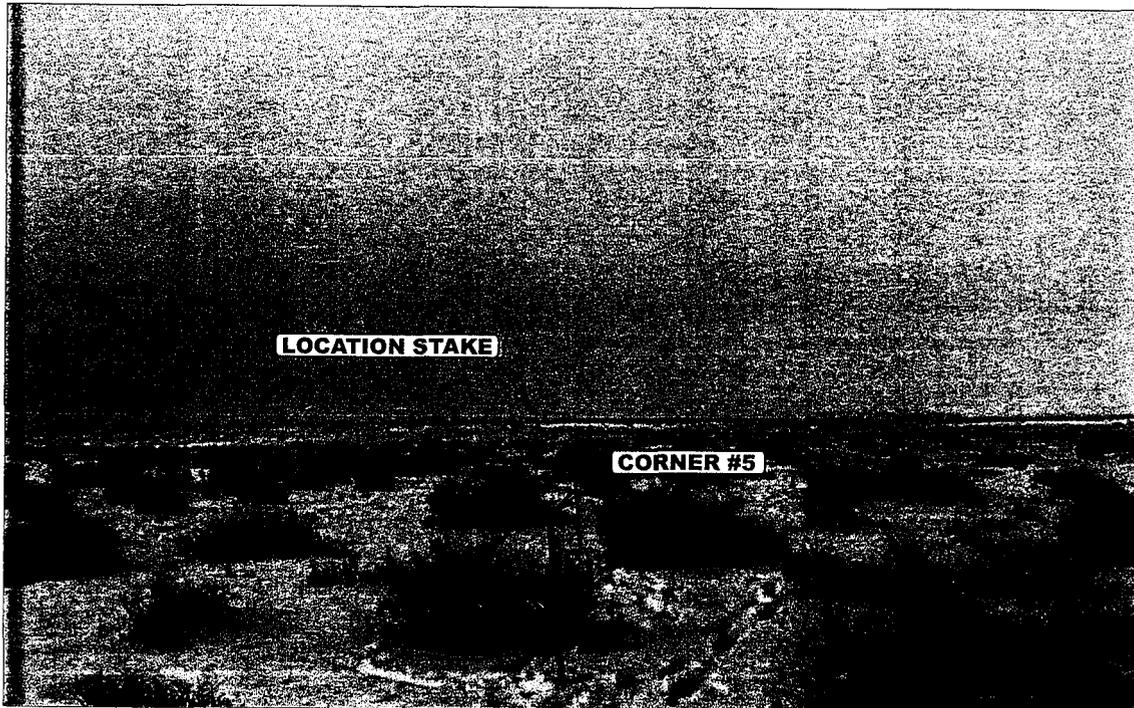


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY

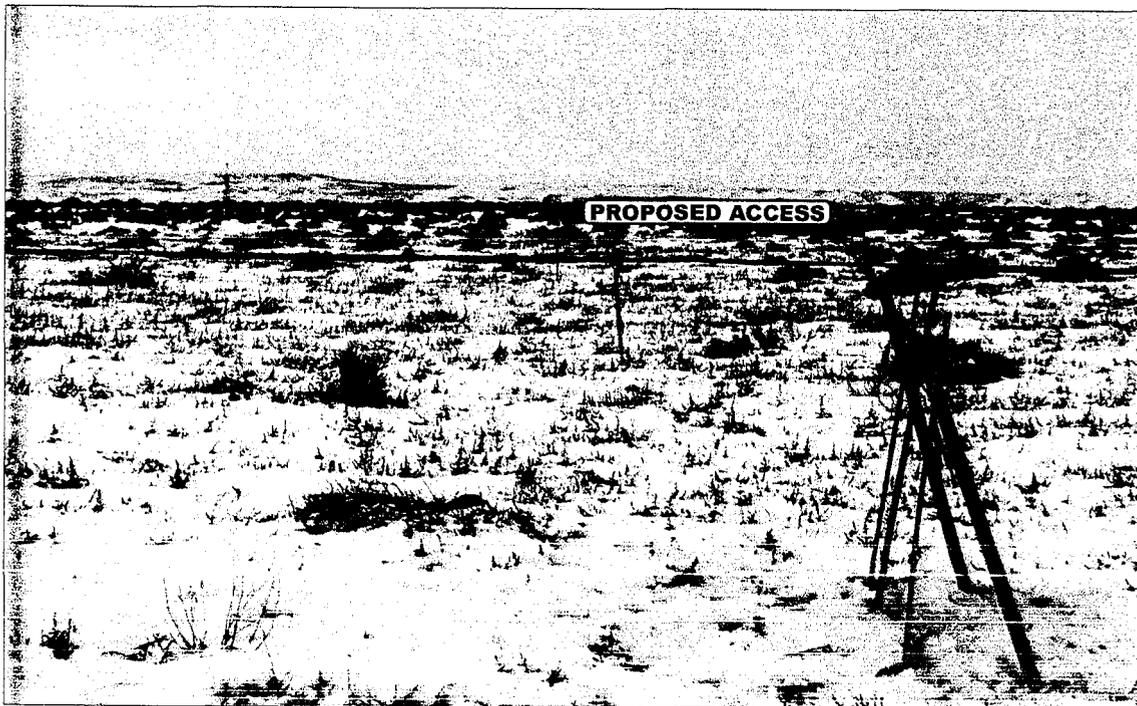


PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: SOUTHWESTERLY



- Since 1964 -

U
E
L
S
Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

01 05 05
MONTH DAY YEAR

PHOTO

TAKEN BY: G.S.

DRAWN BY: C.H.





REVISED: 00-00-00

EOG RESOURCES, INC.

TYPICAL CROSS SECTIONS FOR
 NORTH CHAPITA #267-5
 SECTION 5, T9S, R22E, S.L.B.&M.
 695' FSL 1970' FWL

1" = 20'
 X-Section Scale
 1" = 50'

DATE: 01-19-05
 Drawn By: D.R.B.

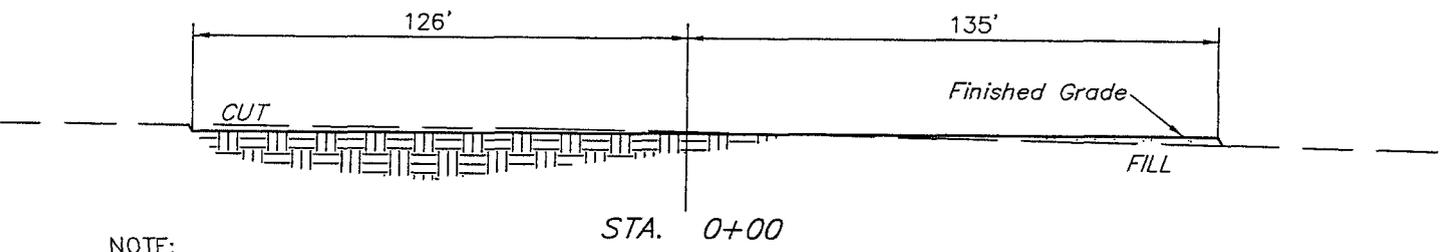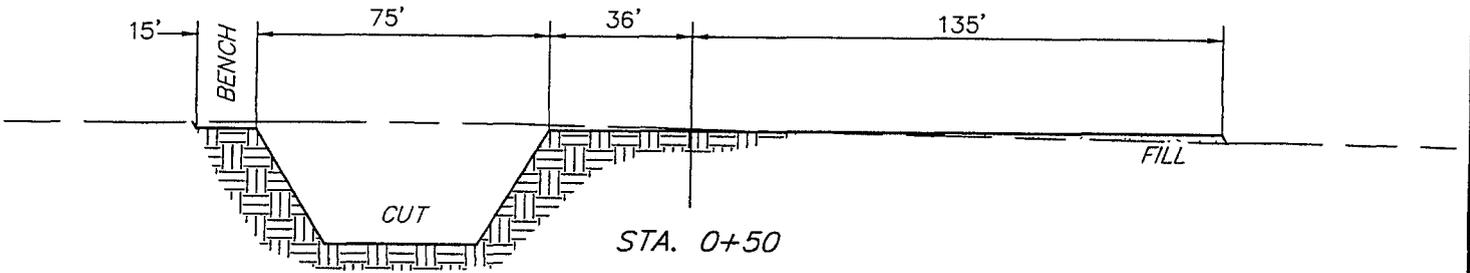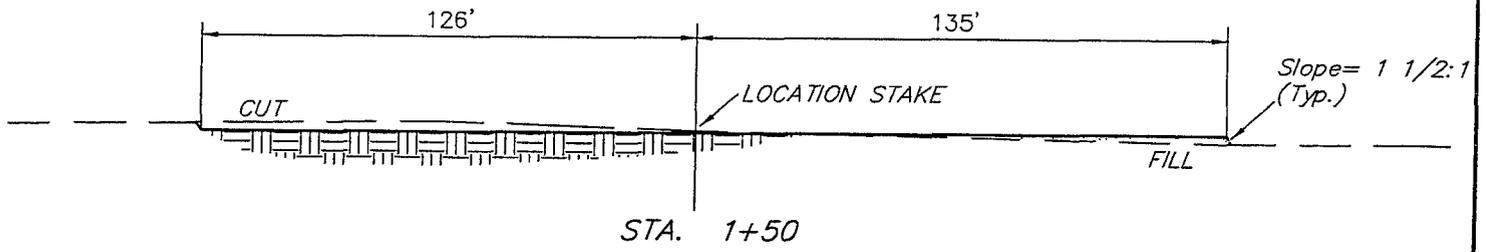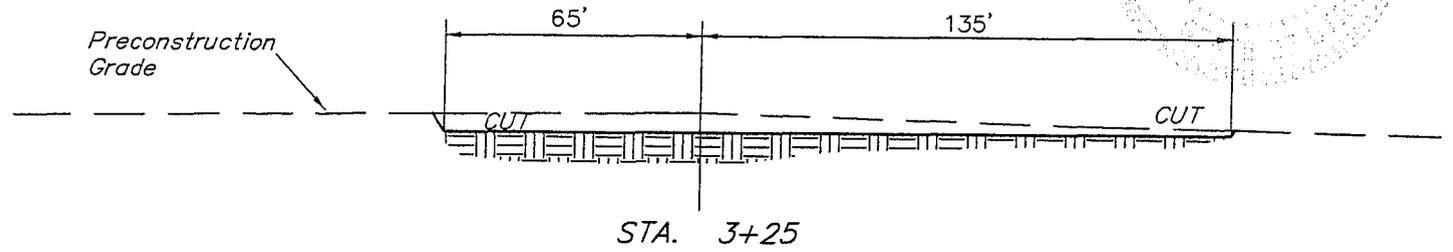

NOTE:
 Topsoil should not be Stripped Below Finished Grade on Substructure Area.


* NOTE:
 FILL QUANTITY INCLUDES 5% FOR COMPACTION

APPROXIMATE YARDAGES

(12") Topsoil Stripping	= 2,980 Cu. Yds.
Remaining Location	= 3,470 Cu. Yds.
TOTAL CUT	= 6,450 CU.YDS.
FILL	= 1,810 CU.YDS.

EXCESS MATERIAL	= 4,640 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 4,640 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
 85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

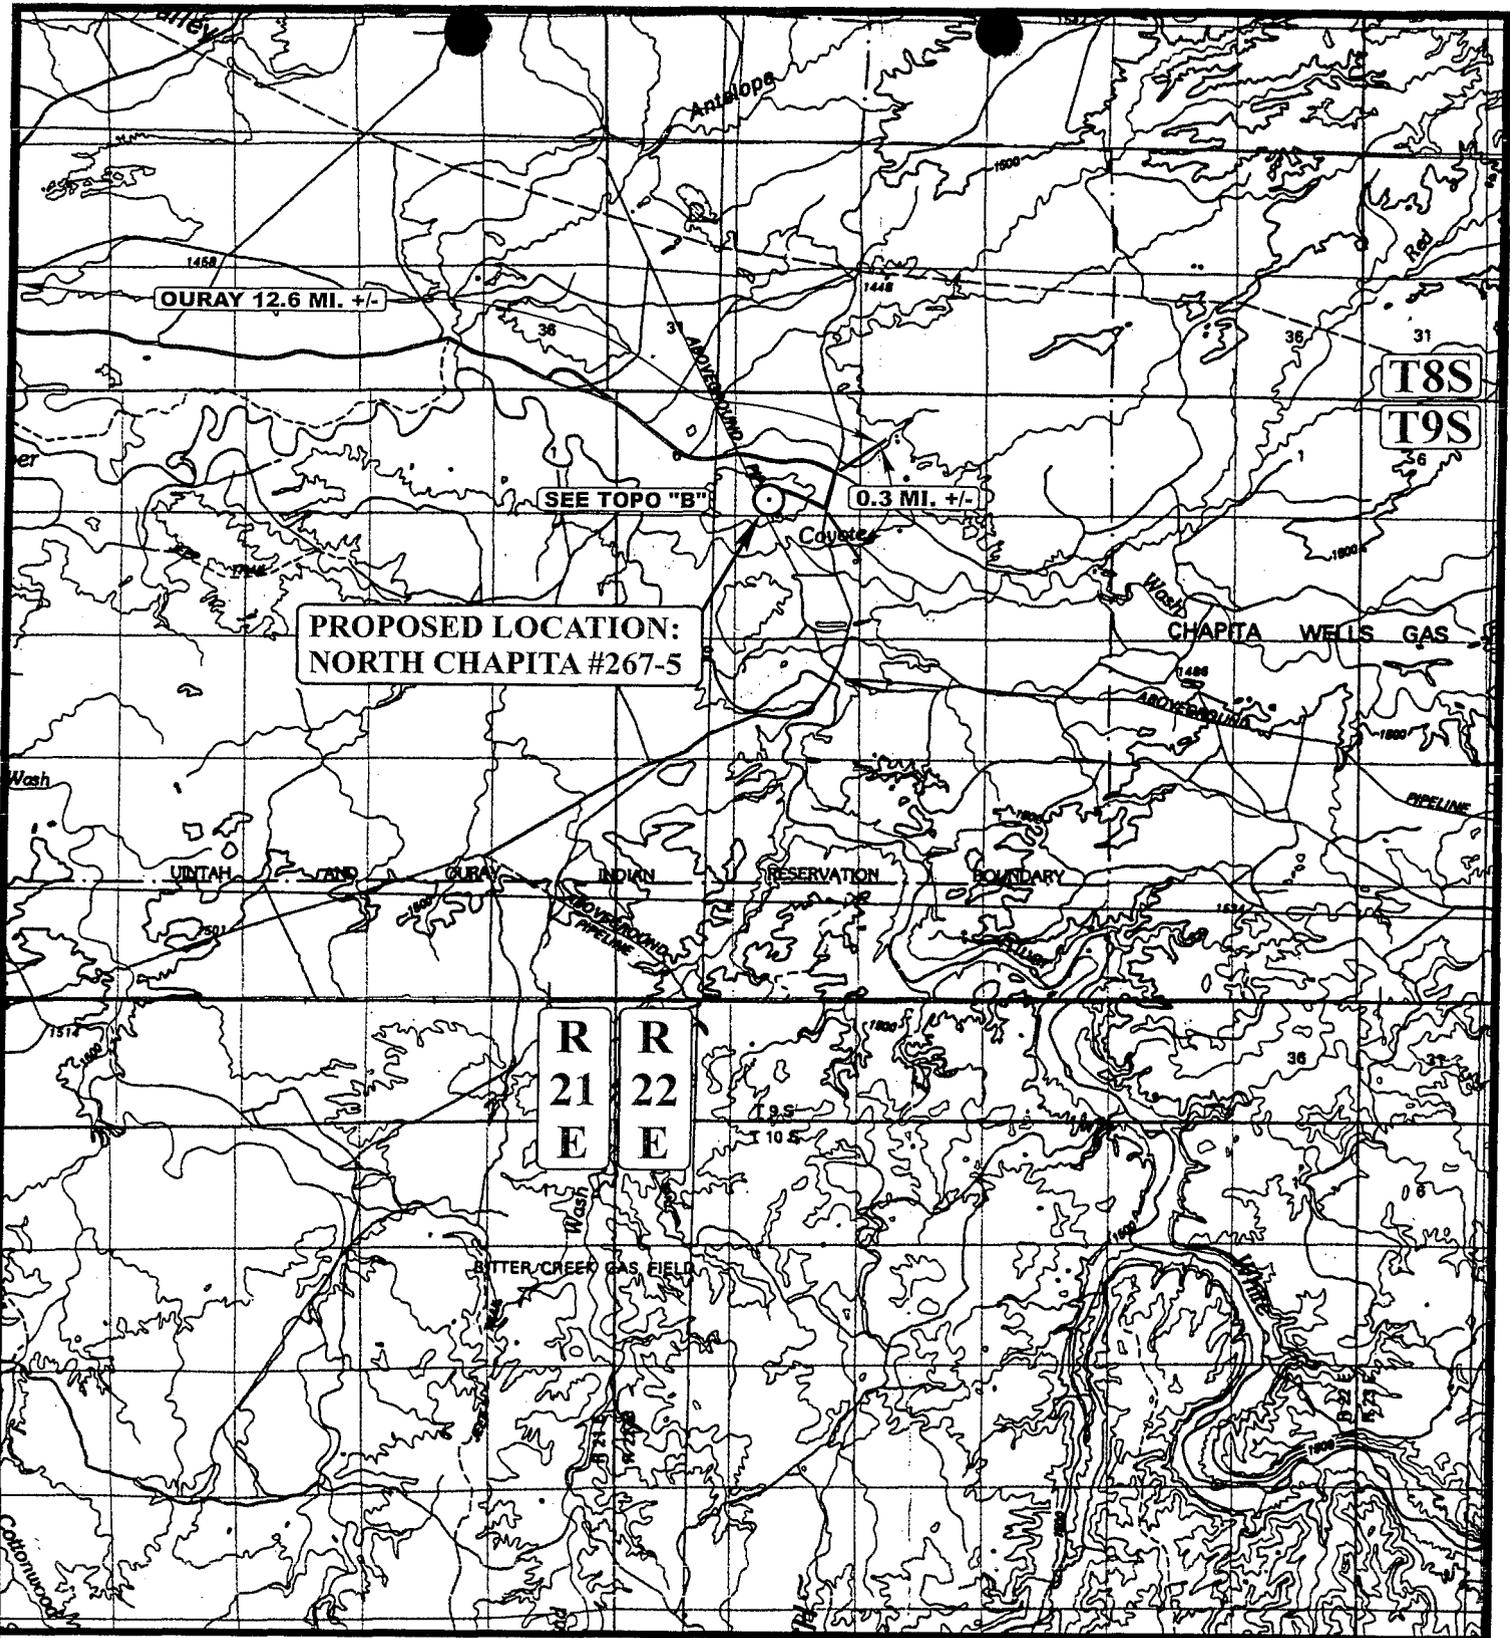

**PROPOSED LOCATION:
NORTH CHAPITA #267-5**

**R
21
E** **R
22
E**

T8S
T9S

LEGEND:

○ PROPOSED LOCATION



Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813




EOG RESOURCES, INC.

NORTH CHAPITA #267-5
SECTION 5, T9S, R22E, S.L.B.&M.
695' FSL 1970' FWL

TOPOGRAPHIC 01 05 05
MAP MONTH DAY YEAR
SCALE: 1:100,000 | DRAWN BY: C.H. | REVISED: 00-00-00



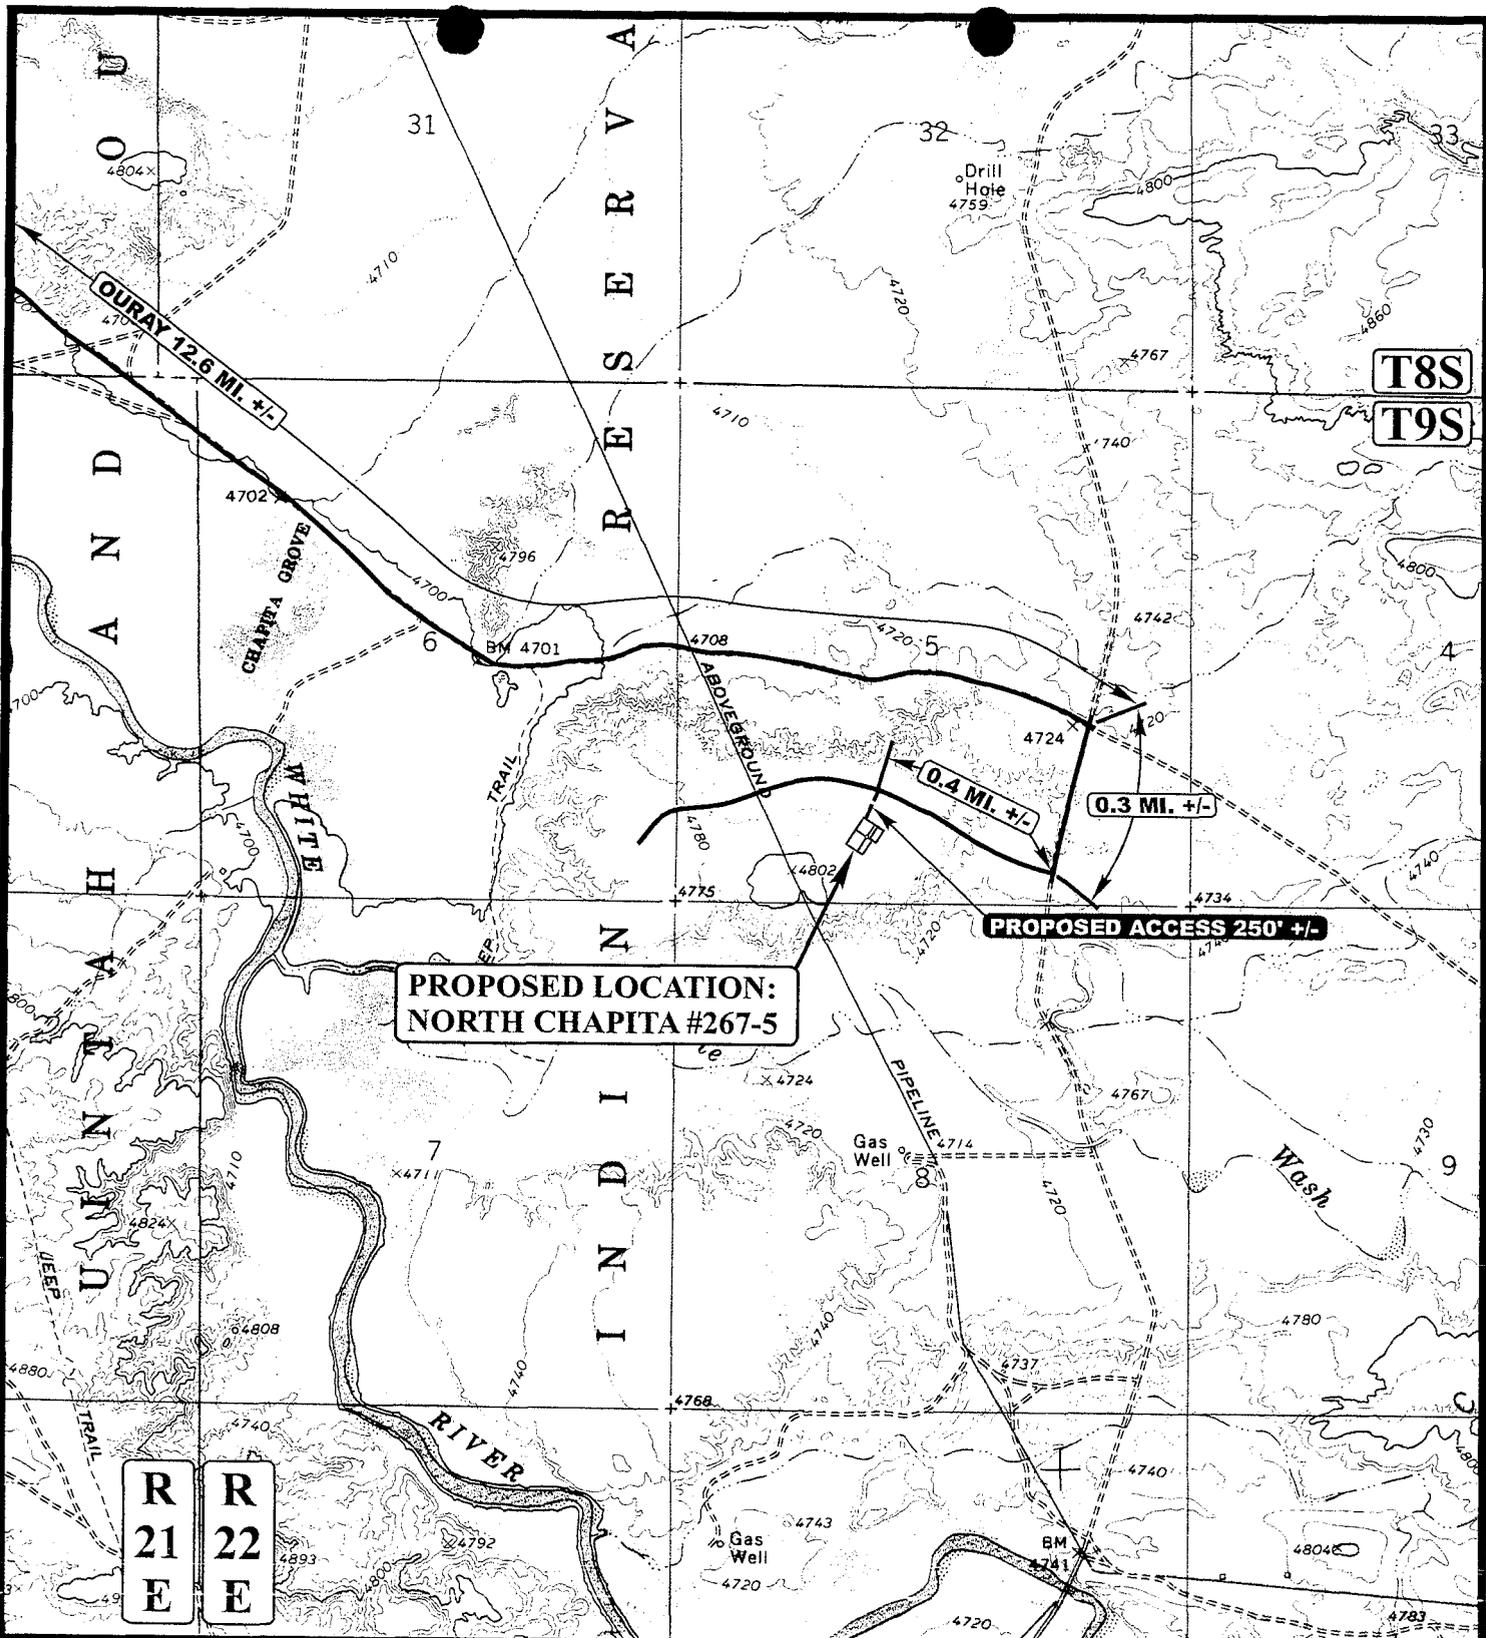

T8S
T9S

**PROPOSED LOCATION:
NORTH CHAPITA #267-5**

PROPOSED ACCESS 250' +/-

0.4 MI. +/-

0.3 MI. +/-

LEGEND:

- EXISTING ROAD
- PROPOSED ACCESS ROAD



EOG RESOURCES, INC.


NORTH CHAPITA #267-5
SECTION 5, T9S, R22E, S.L.B.&M.
695' FSL 1970' FWL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC 01 05 05
MAP MONTH DAY YEAR
SCALE: 1" = 2000' DRAWN BY: C.H. REVISED: 00-00-00



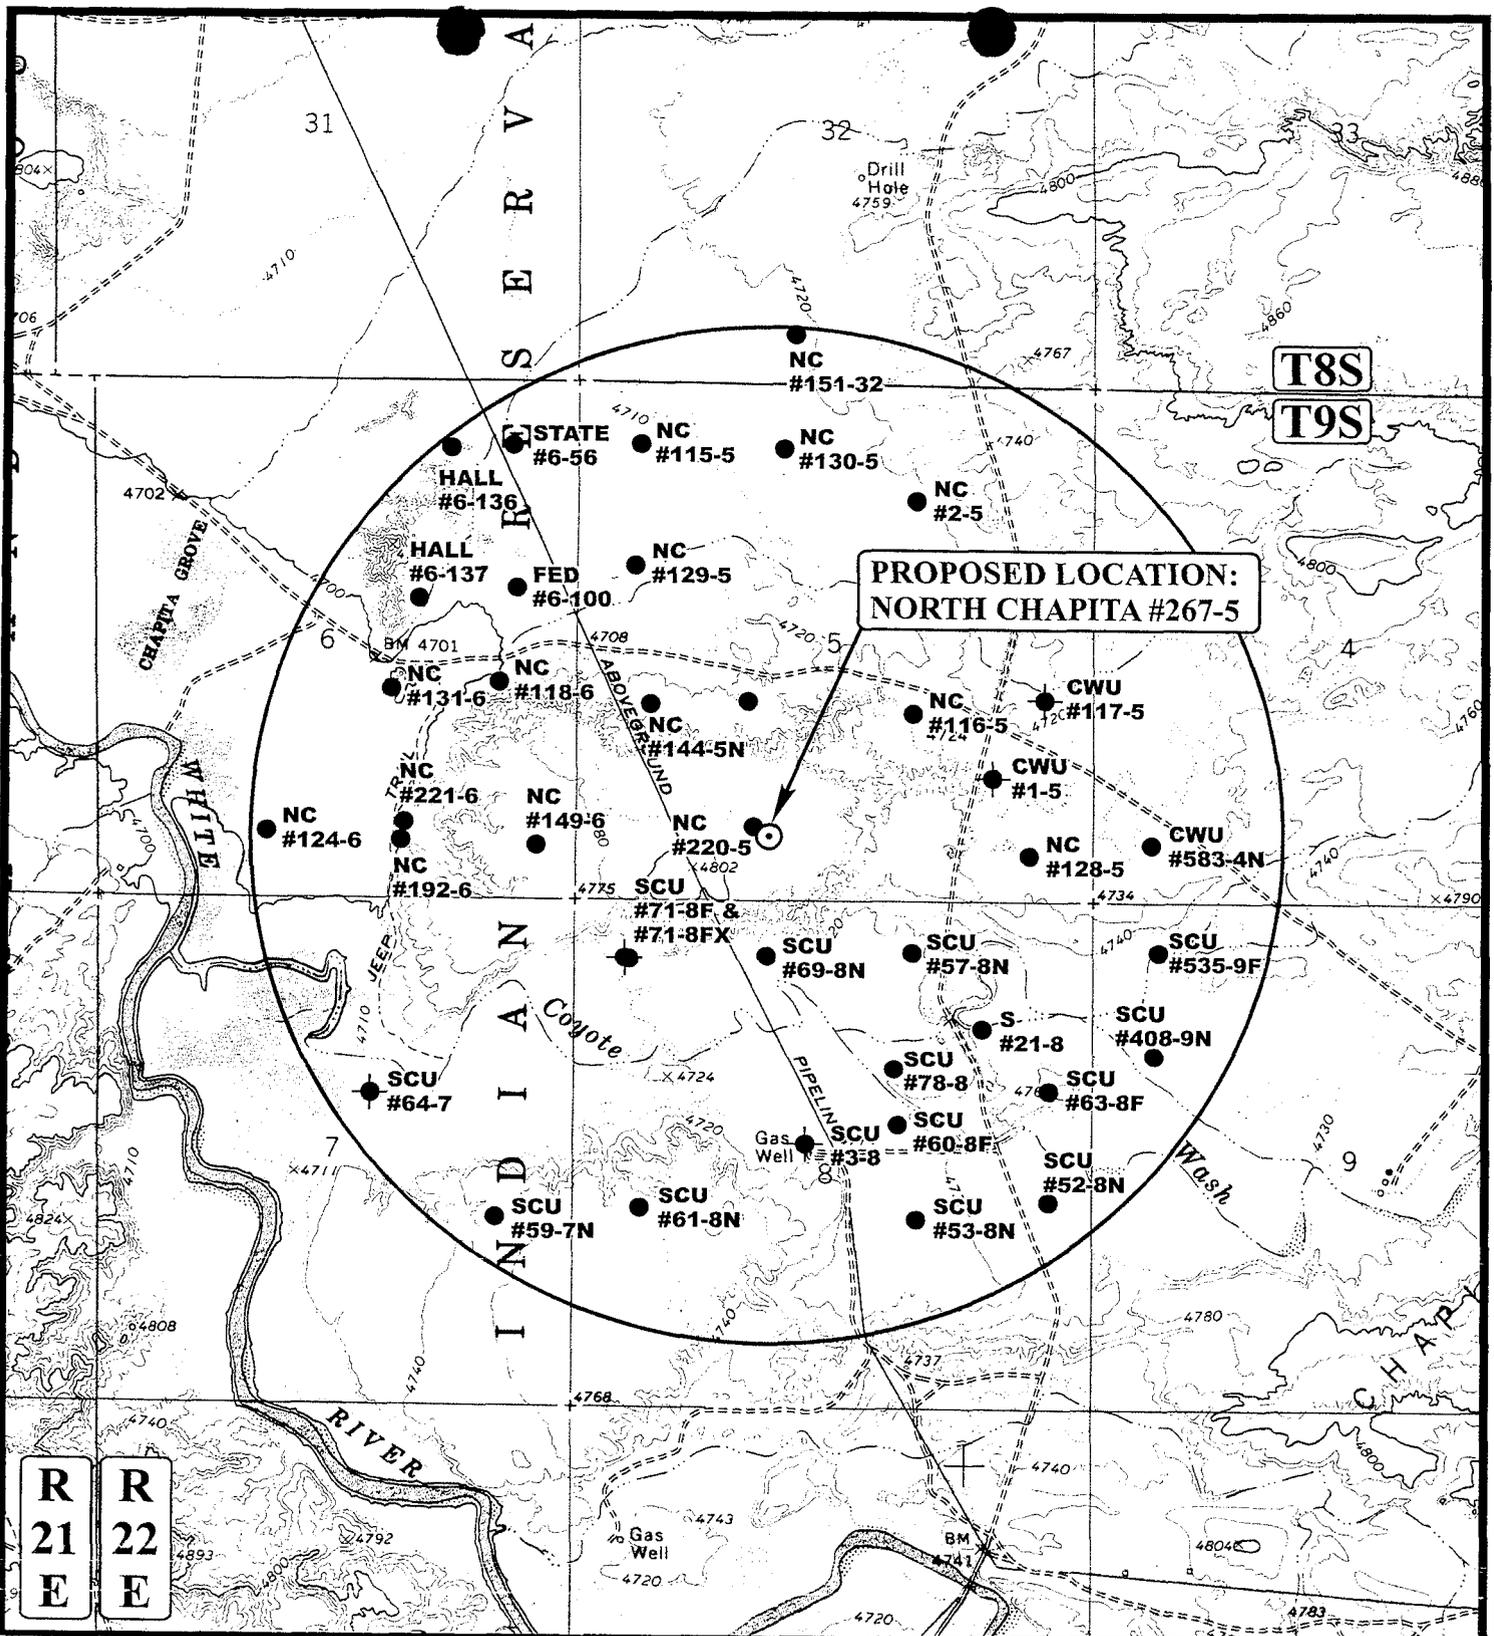

**PROPOSED LOCATION:
NORTH CHAPITA #267-5**

**R
21
E**

**R
22
E**

LEGEND:

- ◌ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ◌ WATER WELLS
- ◌ ABANDONED WELLS
- ◌ TEMPORARILY ABANDONED

U E S

Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



EOG RESOURCES, INC.


NORTH CHAPITA #267-5
SECTION 5, T9S, R22E, S.L.B.&M.
695' FSL 1970' FWL

TOPOGRAPHIC MAP

01	05	05
MONTH	DAY	YEAR

SCALE: 1" = 2000' DRAWN BY: C.H. REVISED: 00-00-00

C TOPO

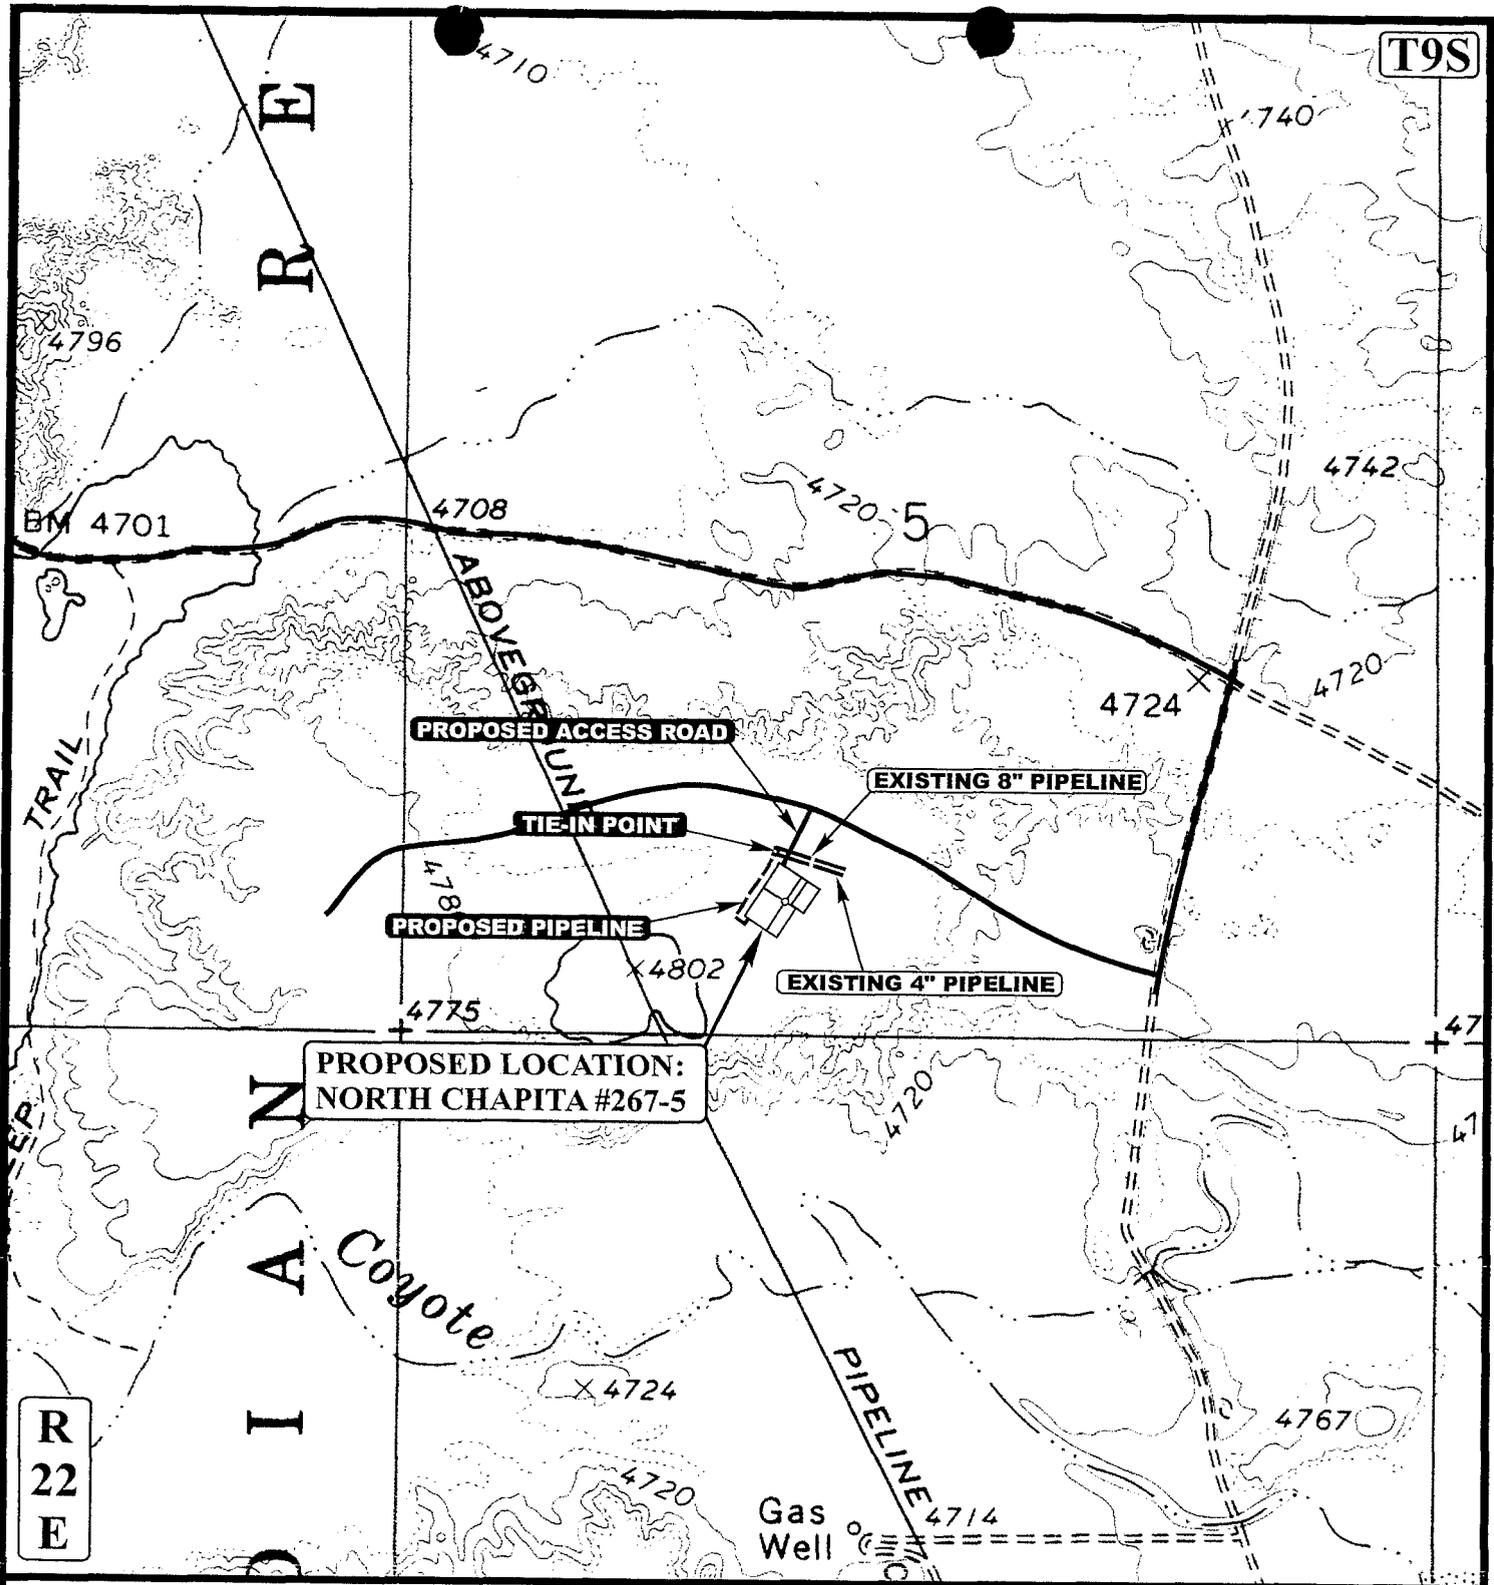

APPROXIMATE TOTAL PIPELINE DISTANCE = 487' +/-

LEGEND:

-  PROPOSED ACCESS ROAD
-  EXISTING PIPELINE
-  PROPOSED PIPELINE



EOG RESOURCES, INC.

NORTH CHAPITA #267-5
SECTION 5, T9S, R22E, S.L.B.&M.
695' FSL 1970' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC 01 05 05
MAP MONTH DAY YEAR
 SCALE: 1" = 1000' DRAWN BY: C.H. REVISED: 00-00-00



**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 10/13/2005

API NO. ASSIGNED: 43-047-37251

WELL NAME: N CHAPITA 267-5
 OPERATOR: EOG RESOURCES INC (N9550)
 CONTACT: ED TROTTER

PHONE NUMBER: 435-789-4120

PROPOSED LOCATION:

SESW 05 090S 220E
 SURFACE: 0695 FSL 1970 FWL
 BOTTOM: 0695 FSL 1970 FWL
 UINTAH
 NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal
 LEASE NUMBER: U-41370
 SURFACE OWNER: 2 - Indian
 PROPOSED FORMATION: PRRV
 COALBED METHANE WELL? NO

LATITUDE: 40.05970
 LONGITUDE: -109.4656

RECEIVED AND/OR REVIEWED:


- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. NM-2308)
- N Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 49-1501)
- N RDCC Review (Y/N)
(Date: _____)
- N/A Fee Surf Agreement (Y/N)
- N/A Intent to Commingle (Y/N)

LOCATION AND SITING:

- ___ R649-2-3.
Unit _____
- ___ R649-3-2. General
Siting: 460' From Qtr/Qtr & 920' Between Wells
- ___ R649-3-3. Exception
- Drilling Unit
Board Cause No: 173-1b
Eff Date: 1-13-2000
Siting: 460' by ext drl w bars & 920' fr other wells.
- ___ R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: 1-Federal Approval
2-OIL SHALE

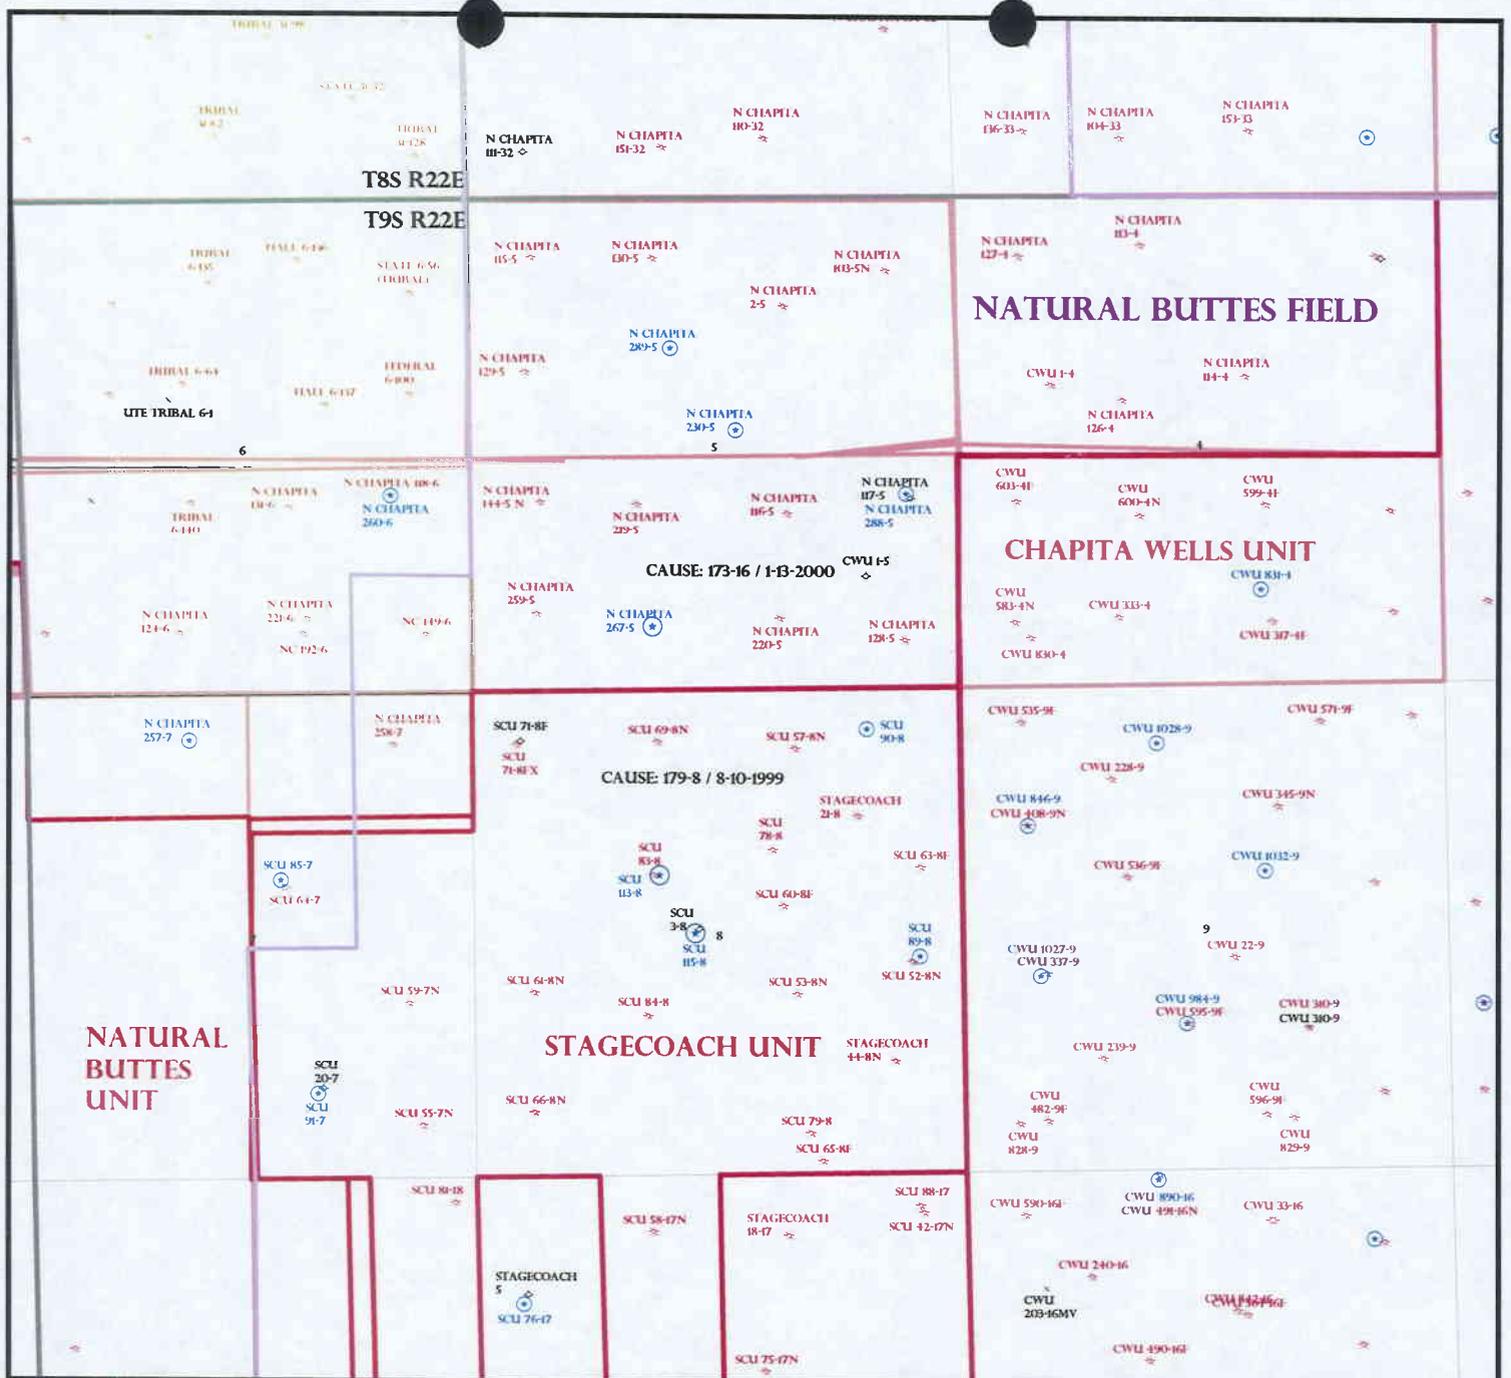

OPERATOR: EOG RESOURCES INC (N9550)

SEC: 5 T. 9S R. 22E

FIELD: NATURAL BUTTES (630)


COUNTY: UINTAH

CAUSE: 173-16 / 1-13-2000

- Field Status**
- ABANDONED
 - ACTIVE
 - COMBINED
 - INACTIVE
 - PROPOSED
 - STORAGE
 - TERMINATED

- Unit Status**
- EXPLORATORY
 - GAS STORAGE
 - NF PP OIL
 - NF SECONDARY
 - PENDING
 - PI OIL
 - PP GAS
 - PP GEOTHERML
 - PP OIL
 - SECONDARY
 - TERMINATED

- Wells Status**
- ✂ GAS INJECTION
 - ⊗ GAS STORAGE
 - × LOCATION ABANDONED
 - ⊙ NEW LOCATION
 - ⊕ PLUGGED & ABANDONED
 - ⊙ PRODUCING GAS
 - PRODUCING OIL
 - ⊙ SHUT-IN GAS
 - SHUT-IN OIL
 - ⊗ TEMP. ABANDONED
 - TEST WELL
 - ⊙ WATER INJECTION
 - ⊙ WATER SUPPLY
 - ⊙ WATER DISPOSAL
 - ⊙ DRILLING



Utah Oil Gas and Mining



PREPARED BY: DIANA WHITNEY
DATE: 14-OCTOBER-2005



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

October 18, 2005

EOG Resources, Inc.
P O Box 1815
Vernal, UT 84078

Re: North Chapita 267-5 Well, 695' FSL, 1970' FWL, SE SW, Sec. 5, T. 9 South,
R. 22 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-37251.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: EOG Resources, Inc.
Well Name & Number North Chapita 267-5
API Number: 43-047-37251
Lease: U-41370

Location: SE SW Sec. 5 T. 9 South R. 22 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

5. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.



EOG Resources, Inc.
211 South 1000 East
Vernal, UT 84078
P.O. Box 1815
Vernal, UT 84078
(435) 789-0790

March 27, 2006

43-047-37251

Mr. Matt Baker
Bureau of Land Management
1770 South 500 East
Vernal, Ut 84078

**RE: North Chapita 267-05
695 FSL 1970 FWL
SE/SW, Section 5, T9S, R22E
Uintah County, UT**

Dear Mr. Baker:

Attached please find an amended Eight Point Drilling Plan for the referenced pending Application to Drill.

Sincerely,

A handwritten signature in black ink, appearing to read "Kaylene R. Gardner".

Kaylene R. Gardner
Regulatory Assistant

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

Revised: EIGHT POINT PLAN

NORTH CHAPITA WELLS 267-05
SE/SW, SEC. 5, T9S, R22E, S.L.B.&M..
UINTAH COUNTY, UTAH

1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:

FORMATION	DEPTH (KB)
Green River FM	2,361'
Wasatch	5,164'
Chapita Wells	5,807'
Buck Canyon	6,477'
North Horn	7,106'
Island	7,621'
KMV Price River	8,068'
KMV Price River Middle	8,735'
KMV Price River Lower	9,548'
Sego	10,013'

Estimated TD: **10,125' or 100'± below Sego top**

Anticipated BHP: 5,528 Psig

1. Fresh Waters may exist in the upper, approximately 1,000 ft ± of the Green River Formation, with top at about 2,000 ft ±.
2. Cement isolation is installed to surface of the well isolating all zones by cement.

3. PRESSURE CONTROL EQUIPMENT:

Production Hole – 5000 Psig
BOP schematic diagrams attached.

4. CASING PROGRAM:

	<u>HOLE SIZE</u>	<u>INTERVAL</u>	<u>SIZE</u>	<u>WEIGHT</u>	<u>GRADE</u>	<u>THREAD</u>	<u>RATING FACTOR</u>		
							<u>COLLAPSE</u>	<u>BURST</u>	<u>TENSILE</u>
Conductor:	17 1/2"	0' – 45'	13 3/8"	48.0#	H-40	STC	770 PSI	1730 PSI	322,000#
Surface	12-1/4"	45' – 2,300'KB±	9-5/8"	36.0#	J-55	STC	2020 PSI	3520 Psi	394,000#
Production:	7-7/8"	2,300'± – TD	4-1/2"	11.6#	N-80	LTC	6350 PSI	7780 Psi	223,000#

Note: 12-1/4" surface hole will be drilled to a total depth of 200'± below the base of the Green River lost circulation zone and cased w/9-5/8" as shown to that depth. Drilled depth may be shallower or deeper than the 2300' shown above depending on the actual depth of the loss zone. All casing will be new or inspected.

5. Float Equipment:

Surface Hole Procedure (0' - 2300'±)

Guide Shoe

Insert Float Collar (PDC drillable)

Centralizers: 1-5' above shoe, top of jts. #2 and #3 then every 5th joint to surface. (15 total)

NORTH CHAPITA WELLS 267-05
SE/SW, SEC. 5, T9S, R22E, S.L.B.&M..
UINTAH COUNTY, UTAH

Float Equipment: (Cont'd)

Production Hole Procedure (2300'± - TD):

Float shoe, 1 joint casing, float collar and balance of casing to surface. 4-½", 11.6#, N-80 or equivalent marker collars or short casing joints to be placed at top of Price River and 400' above top of Wasatch. Centralizers to be placed 5' above shoe on joint #1, top of joint #2, and every 2nd joint to 400' above Wasatch Island top. Thread lock float shoe, top and bottom of float collar, and top of 2nd joint.

6. MUD PROGRAM

Surface Hole Procedure (Surface - 2300'±):

Air/air mist or aerated water.

Production Hole Procedure (2300'± - TD): Anticipated mud weight 9.5 – 10.5 ppg depending on actual wellbore conditions encountered while drilling.

2300'± - TD A closed mud system will be utilized. A bentonite gelled water mud system will be used to control viscosity w/PHPA polymer used for supplemental viscosity and clay encapsulation/inhibition. Water loss will be maintained at <15cc's using white starch or PAC. Bactericides will be used as needed. Anticipated pH will range from 9.0-10.0. Mud weight will be adjusted as necessary for well control. Deflocculants/thinners will be used as necessary to maintain mud quality. LCM sweeps will be utilized as necessary to control lost circulation and mud loss. CO2 contamination, if encountered, will be treated with lime and gypsum.

7. VARIANCE REQUESTS:

Reference: Onshore Oil and Gas Order No. 2 – Item E: Special Drilling Operations

EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. Due to reduce location excavation, the blooie line will be approximately 75' in length

8. EVALUATION PROGRAM:

Logs: Mud log from base of surface casing to TD.
Cased-hole Logs: Cased-hole logs will be run in lieu of open-hole logs consisting of the following:
Cement Bond / Casing Collar Locator and Pulsed Neutron

NORTH CHAPITA WELLS 267-05
SE/SW, SEC. 5, T9S, R22E, S.L.B.&M..
UINTAH COUNTY, UTAH

9. CEMENT PROGRAM:

Surface Hole Procedure (Surface - 2300'±):

Lead: Class "G" cement with 16% Gel, 10 #/sx Gilsonite, 3% Salt, 2% CaCl₂, 3 lb/sx GR3 ¼ #/sx Flocele mixed at 11 ppg, 3.82 ft³/sk. yield, 23 gps water.

Tail: Class "G" cement with 2% CaCl₂, ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft³/sk., 5.2 gps water.

Top Out: As necessary with Class "G" cement with 2% CaCl₂, ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft³/sk., 5.2 gps water.

Note: Cement volumes will be calculated to bring lead cement to surface and tail cement to 500' above the casing shoe.

Production Hole Procedure (2300'± - TD)

Lead: 165 sks: Hi-Lift "G" w/12% D20 (Bentonite), 1% D79 (Extender), 5% D44 (Salt), 0.2% D46 (Antifoam), 0.25% D112 (Fluid Loss Additive), 0.25 pps D29 (cello flakes) mixed at 11.0 ppg, 3.91 ft³/sk., 24.5 gps water.

Tail: 948 sks: 50:50 Poz "G" w/ 2% D20 (Bentonite), 0.1% D46 (Antifoam), 0.075% D13 (Retarder), 0.2% D167 (Fluid Loss Additive), 0.2% D65 (Dispersant), mixed at 14.1 ppg, 1.28 ft³/sk., 5.9 gps water.

Note: The above number of sacks is based on gauge-hole calculation.
Lead volume to be calculated to bring cement to 200'± above 9-5/8" casing shoe.
Tail volume to be calculated to bring cement to 400'± above top of Wasatch.
Final Cement volumes will be based upon gauge-hole plus 45% excess.

10. ABNORMAL CONDITIONS:

Surface Hole (Surface - 2300'±):

Lost circulation

Production Hole (2300'± - TD):

Sloughing shales, lost circulation and key seat development are possible in the Wasatch Formation.

Revised: EIGHT POINT PLAN

NORTH CHAPITA WELLS 267-05
SE/SW, SEC. 5, T9S, R22E, S.L.B.&M..
UINTAH COUNTY, UTAH

11. STANDARD REQUIRED EQUIPMENT:

- A. Choke Manifold
- B. Upper and Lower Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

12. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

(Attachment: BOP Schematic Diagram)

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: U-41370
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____	8. WELL NAME and NUMBER: NORTH CHAPITA 267-05	
2. NAME OF OPERATOR: EOG RESOURCES, INC.	9. API NUMBER: 43-047-37251	
3. ADDRESS OF OPERATOR: 1060 East Highway 40 CITY VERNAL STATE UT ZIP 84078	PHONE NUMBER: (435) 789-0790	10. FIELD AND POOL, OR WLD CAT: NATURAL BUTTES
4. LOCATION OF WELL FOOTAGES AT SURFACE: 695 FSL 1970 FWL 40.059650 LAT 109.466297 LON		COUNTY: UINTAH
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESW 5 9S 22E S.L.B. & M		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____ <input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: APD EXTENSION REQUEST
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: 10-24-06

By: [Signature]

10-25-06
Rm

NAME (PLEASE PRINT) <u>Kaylene R. Gardner</u>	TITLE <u>Sr. Regulatory Assistant</u>
SIGNATURE <u>[Signature]</u>	DATE <u>10/19/2006</u>

(This space for State use only)

RECEIVED
OCT 23 2006
DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-37251
Well Name: NORTH CHAPITA 267-5
Location: 695 FSL 1970 FWL (SESW), SECTION 5, T9S, R22E S.L.B.&M
Company Permit Issued to: EOG RESOURCES, INC.
Date Original Permit Issued: 10/18/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No


Signature

10/19/2006

Date

Title: SR. REGULATORY ASSISTANT

Representing: EOG RESOURCES, INC.

RECEIVED

OCT 23 2006

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: U-41370
2. NAME OF OPERATOR: EOG RESOURCES, INC.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: 1060 East Highway 40 CITY VERNAL STATE UT ZIP 84078		7. UNIT or CA AGREEMENT NAME:
PHONE NUMBER: (435) 789-0790		8. WELL NAME and NUMBER: NORTH CHAPITA 267-05
4. LOCATION OF WELL FOOTAGES AT SURFACE: 695 FSL 1970 FWL 40.059650 LAT 109.466297 LON		9. API NUMBER: 43-047-37251
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESW 5 9S 22E S.L.B. & M		10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES

COUNTY: **UINTAH**

STATE: **UTAH**

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: APD EXTENSION REQUEST
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 09-27-07
By: [Signature]

9-28-07
Rm

NAME (PLEASE PRINT) Kaylene R. Gardner	TITLE Lead Regulatory Assistant
SIGNATURE <u>[Signature]</u>	DATE 9/25/2007

(This space for State use only)

RECEIVED
SEP 27 2007

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-37251
Well Name: NORTH CHAPITA 267-5
Location: 695 FSL 1970 FWL (SESW), SECTION 5, T9S, R22E S.L.B.&M
Company Permit Issued to: EOG RESOURCES, INC.
Date Original Permit Issued: 10/18/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No


Signature

9/25/2007

Date

Title: LEAD REGULATORY ASSISTANT

Representing: EOG RESOURCES, INC.

RECEIVED
SEP 27 2007

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

5. LEASE DESIGNATION AND SERIAL NUMBER:
U-41370

SUNDRY NOTICES AND REPORTS ON WELLS

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

7. UNIT or CA AGREEMENT NAME:

1. TYPE OF WELL
OIL WELL GAS WELL OTHER _____

8. WELL NAME and NUMBER:
NORTH CHAPITA 267-05

2. NAME OF OPERATOR:
EOG RESOURCES, INC.

9. API NUMBER:
43-047-37251

3. ADDRESS OF OPERATOR:
1060 East Highway 40 CITY **VERNAL** STATE **UT** ZIP **84078**

PHONE NUMBER:
(435) 789-0790

10. FIELD AND POOL, OR WILDCAT:
NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE: **695 FSL 1970 FWL 40.059650 LAT 109.466297 LON** COUNTY: **UINTAH**
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: **SESW 5 9S 22E S.L.B. & M** STATE: **UTAH**

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: APD EXTENSION REQUEST
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: 09-30-08
By: [Signature]

NAME (PLEASE PRINT) Mickenzie Thacker TITLE Operations Clerk
SIGNATURE [Signature] DATE 9/22/2008

(This space for State use only)
COPY SENT TO OPERATOR
Date: 10.2.2008
Initials: KS
(See Instructions on Reverse Side)

RECEIVED
SEP 25 2008
DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-37251
Well Name: NORTH CHAPITA 267-5
Location: 695 FSL 1970 FWL (SESW), SECTION 5, T9S, R22E S.L.B.&M
Company Permit Issued to: EOG RESOURCES, INC.
Date Original Permit Issued: 10/18/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

Mickenzie Thacker
Signature

9/22/2008
Date

Title: Operations Clerk

Representing: EOG Resources, Inc.

RECEIVED

SEP 25 2008

DIV. OF OIL, GAS & MINING


STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: U-41370
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE 7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: N CHAPITA 267-5
2. NAME OF OPERATOR: EOG Resources, Inc.	9. API NUMBER: 43047372510000
3. ADDRESS OF OPERATOR: 1060 East Highway 40 , Vernal, UT, 84078	PHONE NUMBER: 435 781-9111 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0695 FSL 1970 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 05 Township: 09.0S Range: 22.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 9/16/2009	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: _____

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
 EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the
 Utah Division of
 Oil, Gas and Mining

Date: September 22, 2009
 By: 

NAME (PLEASE PRINT) Mickenzie Thacker	PHONE NUMBER 435 781-9145	TITLE Operations Clerk
SIGNATURE N/A		DATE 9/16/2009



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047372510000

API: 43047372510000

Well Name: N CHAPITA 267-5

Location: 0695 FSL 1970 FWL QTR SESW SEC 05 TWP 090S RNG 220E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 10/18/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No


**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Mickenzie Thacker

Date: 9/16/2009

Title: Operations Clerk **Representing:** EOG RESOURCES, INC.

Date: September 22, 2009

By: 

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: U-41370
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE 7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: N CHAPITA 267-5
2. NAME OF OPERATOR: EOG Resources, Inc.	9. API NUMBER: 43047372510000
3. ADDRESS OF OPERATOR: 600 17th Street, Suite 1000 N , Denver, CO, 80202	PHONE NUMBER: 435 781-9111 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0695 FSL 1970 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 05 Township: 09.0S Range: 22.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 9/20/2010	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: September 28, 2010

By: 

NAME (PLEASE PRINT) Mickenzie Gates	PHONE NUMBER 435 781-9145	TITLE Operations Clerk
SIGNATURE N/A	DATE 9/20/2010	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047372510000

API: 43047372510000

Well Name: N CHAPITA 267-5

Location: 0695 FSL 1970 FWL QTR SESW SEC 05 TWP 090S RNG 220E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 10/18/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Mickenzie Gates

Date: 9/20/2010

Title: Operations Clerk **Representing:** EOG RESOURCES, INC.

Date: September 28, 2010

By: 

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: U-41370
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: N CHAPITA 267-5	
2. NAME OF OPERATOR: EOG Resources, Inc.	9. API NUMBER: 43047372510000	
3. ADDRESS OF OPERATOR: 1060 East Highway 40 , Vernal, UT, 84078	PHONE NUMBER: 435 781-9111 Ext	9. FIELD and POOL or WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0695 FSL 1970 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 05 Township: 09.0S Range: 22.0E Meridian: S	COUNTY: UINTAH	
	STATE: UTAH	
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 9/23/2011 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PLUG BACK <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> SI TA STATUS EXTENSION <input checked="" type="checkbox"/> APD EXTENSION <input type="checkbox"/> WILDCAT WELL DETERMINATION <input type="checkbox"/> OTHER OTHER: <input style="width: 50px;" type="text"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.		
		Approved by the Utah Division of Oil, Gas and Mining Date: <u>09/27/2011</u> By: 
NAME (PLEASE PRINT) Mckenzie Gates	PHONE NUMBER 435 781-9145	TITLE Operations Clerk
SIGNATURE N/A	DATE 9/23/2011	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047372510000

API: 43047372510000

Well Name: N CHAPITA 267-5

Location: 0695 FSL 1970 FWL QTR SESW SEC 05 TWP 090S RNG 220E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 10/18/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Mickenzie Gates

Date: 9/23/2011

Title: Operations Clerk **Representing:** EOG RESOURCES, INC.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5.LEASE DESIGNATION AND SERIAL NUMBER: U-41370
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE 7.UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: N CHAPITA 267-5
2. NAME OF OPERATOR: EOG Resources, Inc.	9. API NUMBER: 43047372510000
3. ADDRESS OF OPERATOR: 600 17th Street, Suite 1000 N , Denver, CO, 80202	PHONE NUMBER: 435 781-9111 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0695 FSL 1970 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 05 Township: 09.0S Range: 22.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 9/12/2012	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width:100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the Utah Division of Oil, Gas and Mining

Date: September 13, 2012

By:

NAME (PLEASE PRINT) Vail Nazzaro	PHONE NUMBER 303 824-5590	TITLE Sr. Regulatory Assistant
SIGNATURE N/A	DATE 9/12/2012	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047372510000

API: 43047372510000

Well Name: N CHAPITA 267-5

Location: 0695 FSL 1970 FWL QTR SESW SEC 05 TWNP 090S RNG 220E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 10/18/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

Signature: Vail Nazzaro

Date: 9/12/2012

Title: Sr. Regulatory Assistant Representing: EOG RESOURCES, INC.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS	
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	
1. TYPE OF WELL Gas Well	5. LEASE DESIGNATION AND SERIAL NUMBER: U-41370
2. NAME OF OPERATOR: EOG Resources, Inc.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE
3. ADDRESS OF OPERATOR: 600 17th Street, Suite 1000 N , Denver, CO, 80202	7. UNIT or CA AGREEMENT NAME:
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0695 FSL 1970 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 05 Township: 09.0S Range: 22.0E Meridian: S	8. WELL NAME and NUMBER: N CHAPITA 267-5
PHONE NUMBER: 435 781-9111 Ext	9. API NUMBER: 43047372510000
9. FIELD and POOL or WILDCAT: NATURAL BUTTES	COUNTY: UINTAH
	STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 9/27/2013	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the Utah Division of Oil, Gas and Mining

Date: September 30, 2013

By: 

NAME (PLEASE PRINT) Vail Nazzaro	PHONE NUMBER 303 824-5590	TITLE Sr. Regulatory Assistant
SIGNATURE N/A	DATE 9/27/2013	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047372510000

API: 43047372510000

Well Name: N CHAPITA 267-5

Location: 0695 FSL 1970 FWL QTR SESW SEC 05 TWNP 090S RNG 220E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 10/18/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Vail Nazzaro

Date: 9/27/2013

Title: Sr. Regulatory Assistant Representing: EOG RESOURCES, INC.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9 5.LEASE DESIGNATION AND SERIAL NUMBER: U-41370
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE
1. TYPE OF WELL Gas Well		7.UNIT or CA AGREEMENT NAME:
2. NAME OF OPERATOR: EOG RESOURCES, INC.		8. WELL NAME and NUMBER: N CHAPITA 267-5
3. ADDRESS OF OPERATOR: 600 17th Street, Suite 1000 N , Denver, CO, 80202		9. API NUMBER: 43047372510000
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0695 FSL 1970 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 05 Township: 09.0S Range: 22.0E Meridian: S		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
		COUNTY: UINTAH
		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 10/10/2014	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 50px;" type="text"/>
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:			
<input type="checkbox"/> SPUD REPORT Date of Spud:			
<input type="checkbox"/> DRILLING REPORT Report Date:			

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the
October 14, 2014
Oil, Gas and Mining

Date: _____
By: 

NAME (PLEASE PRINT) Donna J Skinner	PHONE NUMBER 303 262-9467	TITLE Sr. Regulatory Assistant
SIGNATURE N/A	DATE 10/10/2014	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047372510000

API: 43047372510000

Well Name: N CHAPITA 267-5

Location: 0695 FSL 1970 FWL QTR SESW SEC 05 TWNP 090S RNG 220E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 10/18/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Donna J Skinner

Date: 10/10/2014

Title: Sr. Regulatory Assistant Representing: EOG RESOURCES, INC.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	5. LEASE DESIGNATION AND SERIAL NUMBER: U-41370
1. TYPE OF WELL Gas Well	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE
2. NAME OF OPERATOR: EOG RESOURCES, INC.	7. UNIT or CA AGREEMENT NAME:
3. ADDRESS OF OPERATOR: 1060 East Highway 40 , Vernal, UT, 84078	8. WELL NAME and NUMBER: N CHAPITA 267-5
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0695 FSL 1970 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 05 Township: 09.0S Range: 22.0E Meridian: S	9. API NUMBER: 43047372510000
9. FIELD and POOL or WILDCAT: NATURAL BUTTES	COUNTY: Uintah
9. PHONE NUMBER: 435 781-9111 Ext	STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 9/2/2015	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the
September 03, 2015
Oil, Gas and Mining

Date: _____

By:

NAME (PLEASE PRINT) Kaylene Gardner	PHONE NUMBER 435 781-9111	TITLE Regulatory Administrator
SIGNATURE N/A	DATE 9/2/2015	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047372510000

API: 43047372510000

Well Name: N CHAPITA 267-5

Location: 0695 FSL 1970 FWL QTR SESW SEC 05 TWNP 090S RNG 220E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 10/18/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Kaylene Gardner

Date: 9/2/2015

Title: Regulatory Administrator Representing: EOG RESOURCES, INC.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5.LEASE DESIGNATION AND SERIAL NUMBER: U-41370
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE 7.UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: N CHAPITA 267-5
2. NAME OF OPERATOR: EOG RESOURCES, INC.	9. API NUMBER: 43047372510000
3. ADDRESS OF OPERATOR: 600 17th Street Ste 1000N , Denver, CO, 80202	PHONE NUMBER: 435 781-9111 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0695 FSL 1970 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 05 Township: 09.0S Range: 22.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 8/22/2016	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the
August 23, 2016
Oil, Gas and Mining

Date: _____
By: 

NAME (PLEASE PRINT) Kristen Sheehan	PHONE NUMBER 303 262-9931	TITLE Assistant Regulatory
SIGNATURE N/A	DATE 8/22/2016	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047372510000

API: 43047372510000

Well Name: N CHAPITA 267-5

Location: 0695 FSL 1970 FWL QTR SESW SEC 05 TWNP 090S RNG 220E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 10/18/2005

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

Signature: Kristen Sheehan

Date: 8/22/2016

Title: Assistant Regulatory Representing: EOG RESOURCES, INC.