

EOG Resources, Inc.
P.O. 1910
Vernal, UT 84078

November 23, 2005

Utah Division of Oil, Gas, & Mining
1594 West North Temple, Suite 1210
P.O. Box 145801
Salt Lake City, UT 84114-5801

RE: APPLICATION FOR PERMIT TO DRILL
CHAPITA WELLS UNIT 3005-6GR
NW/SW (Lot 6), SEC. 6, T9S, R23E
UINTAH COUNTY, UTAH
LEASE NO.: U-01304
FEDERAL LANDS

Enclosed please find a copy of the Application for Permit to Drill and associated attachments for the referenced well.

Please address further communication regarding this matter (including approval) to:

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Phone: (435)789-4120
Fax: (435)789-1420

Sincerely,



Ed Trotter
Agent
EOG Resources, Inc.

Attachments

CWU 3005-6GR B

RECEIVED
DEC 14 2005
DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. U-01304
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator EOG RESOURCES, INC.		7. If Unit or CA Agreement, Name and No. CHAPITA WELLS UNIT
3a. Address P.O. BOX 1815 VERNAL, UT 84078		8. Lease Name and Well No. CHAPITA WELLS UNIT 3005-6GR
3b. Phone No. (Include area code) (435)789-0790		9. API Well No. 43-047-37493
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface 2081' FSL, 473' FWL At proposed prod. Zone 44358684		10. Field and Pool, or Exploratory NATURAL BUTTES
14. Distance in miles and direction from nearest town or post office* 18 MILES SOUTHEAST OF OURAY, UTAH		11. Sec., T., R., M., or Blk. and Survey or Area SEC. 6, T9S, R23E, S.L.B.&M.
15. Distance from proposed* location to nearest property or lease line, ft. 473' (Also to nearest drig. Unit line, if any)	16. No. of Acres in lease 2451	12. County or Parish UINTAH
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. See Topo Map C	19. Proposed Depth 5100'	13. State UTAH
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 4865.0 FEET GRADED GROUND	22. Approximate date work will start* UPON APPROVAL	17. Spacing Unit dedicated to this well
24. Attachments		20. BLM/BIA Bond No. on file NM-2308
23. Estimated duration 45 DAYS		

Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification.
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature 	Name (Printed/Typed) Ed Trotter	Date November 23, 2005
-------------------	---	----------------------------------

Title
Agent

Approved by (Signature) 	Name (Printed/Typed) BRADLEY G. HILL ENVIRONMENTAL SCIENTIST III	Date 01-17-06
Title	Office	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of Approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)

**Federal Approval of this
Action is Necessary**

RECEIVED

DEC 14 2005


DIV. OF OIL, GAS & MINING

EOG RESOURCES, INC.

Well location, CWU #3005-6GR, located as shown in the NW 1/4 SW 1/4 (LOT 6) of Section 6, T9S, R23E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

BENCH MARK 20EAM LOCATED IN THE SE 1/4 OF SECTION 35, T8S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4697 FEET.

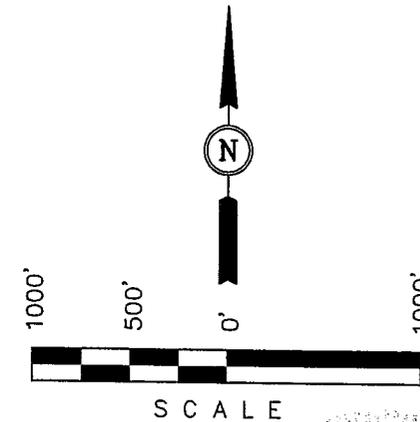

CERTIFICATE


THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Robert H. Key
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 161319
 STATE OF UTAH

UNTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 11-1-05	DATE DRAWN: 11-7-05
PARTY G.S. T.B. K.G.	REFERENCES G.L.O. PLAT	
WEATHER COOL	FILE EOG RESOURCES, INC.	

T9S, R23E, S.L.B.&M.

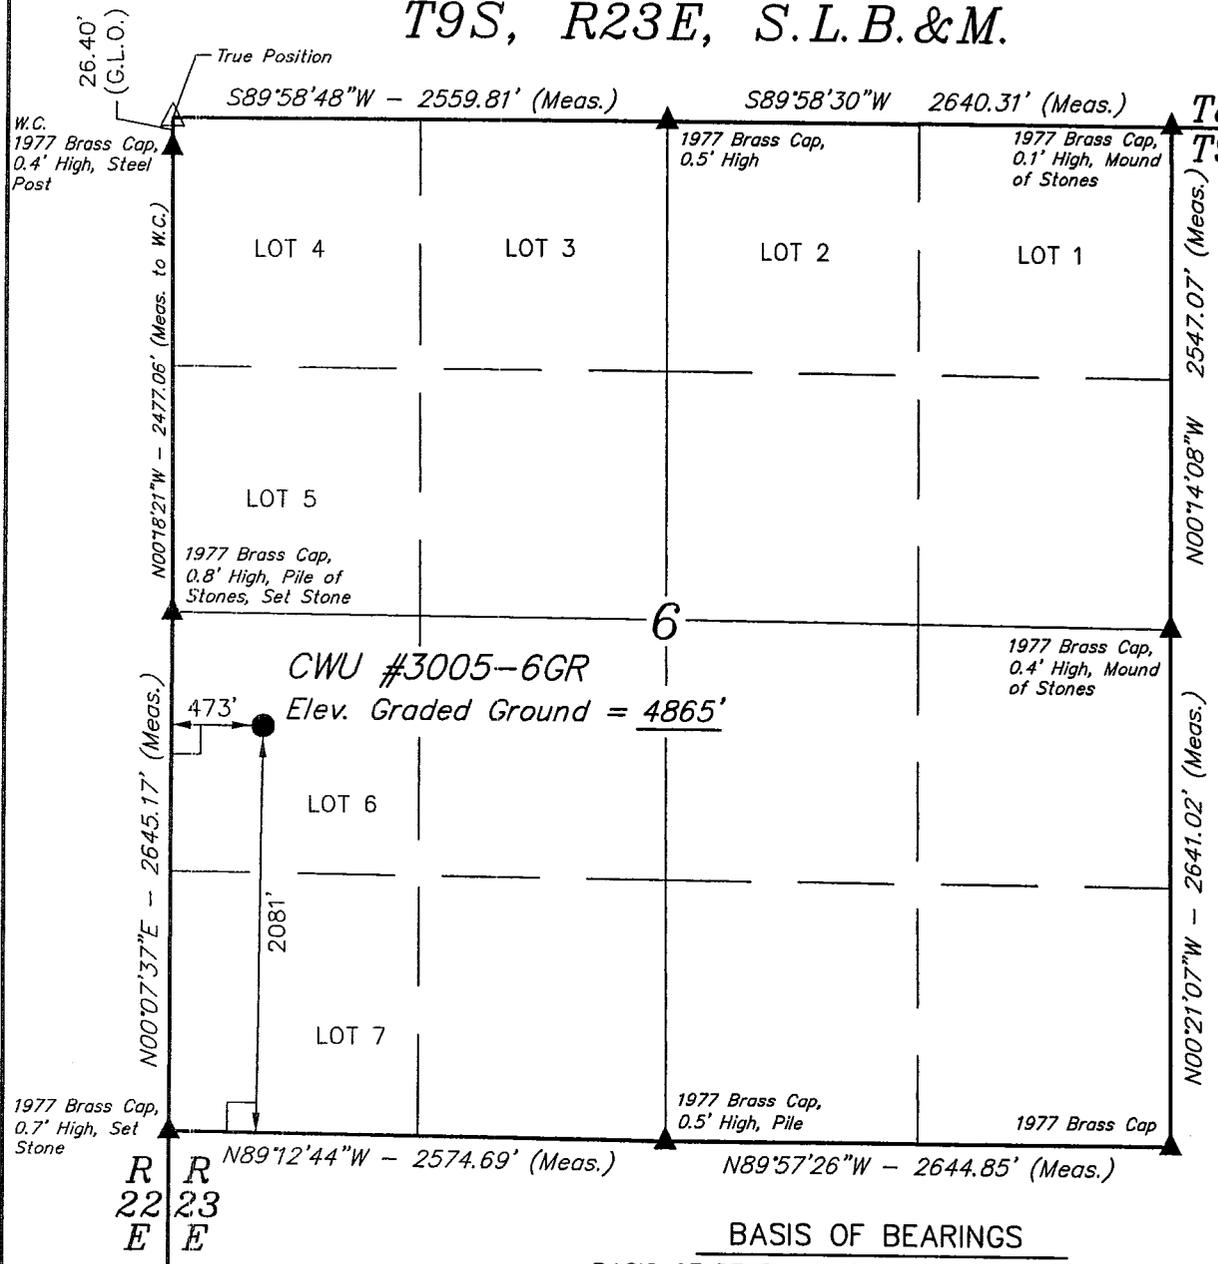

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

(NAD 83)
 LATITUDE = $40^{\circ}03'48.84''$ (40.063567)
 LONGITUDE = $109^{\circ}22'37.91''$ (109.377197)
 (NAD 27)
 LATITUDE = $40^{\circ}03'48.97''$ (40.063603)
 LONGITUDE = $109^{\circ}22'35.46''$ (109.376517)

LEGEND:

- \perp = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

R
22
E

R
23
E

EIGHT POINT PLAN
CHAPITA WELLS UNIT 3005-6GR
NW/SW, SEC. 6, T9S, R23E, S.L.B.&M.
UINTAH COUNTY, UTAH

1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:

FORMATION	DEPTH (KB)
Uinta FM	18'
Green River FM	1,990'
Mahogany Oil Shale Bed	2,661'
Garden Gulch MBR	2,730'
Middle Carb Bed	3,470'
Douglas Creek MBR	4,090'
Castle Peak MBR	4,571'
Uteland Butte MBR	4,814'

EST. TD: 5,100' or 200' ± below Uteland Butte Top Anticipated BHP: 2,520 Psig

1. Fresh Waters may exist in the upper, approximately 1,000 ft ± of the Green River Formation, with top at about 2,000 ft ±.
2. Cement isolation is installed to surface of the well isolating all zones by cement.

3. PRESSURE CONTROL EQUIPMENT: Production Hole - 3,000 Psig
 BOP Schematic Diagram attached.

4. CASING PROGRAM:

	<u>HOLE SIZE</u>	<u>INTERVAL</u>	<u>SIZE</u>	<u>WEIGHT</u>	<u>GRADE</u>	<u>THREAD</u>	<u>RATING FACTOR</u>		
							<u>COLLAPSE</u>	<u>BURST</u>	<u>TENSILE</u>
Surface	12-1/4"	0' - 500'KB±	9-5/8"	36.0#	J-55	STC	2020 Psi	3520 Psi	394,000#
Production:	7-7/8"	500'± - TD	4-1/2"	11.6#	J-55	LTC	4960 Psi	5350 Psi	162,000#

All casing will be new or inspected.

5. Float Equipment:

Surface Hole Procedure (0 - 500' ± Below GL):

Guide Shoe

Insert Float Collar (PDC drillable)

Centralizers: 1 - 5-10' above shoe, every collar for next 3 joints (4 total).

Production Hole Procedure (500' ± - TD):

Float shoe, 1 joint casing, float collar and balance of casing to surface. 4-1/2", 11.6#, J-55 or equivalent marker collars or short casing joints to be placed 400' above top of Garden Gulch. Centralizers to be placed 5' above shoe on joint #1, top of joint #2, and every 2nd joint to 400' above Garden Gulch top. (15± total). Thread lock float shoe, top and bottom of float collar, and top of 2nd joint.

EIGHT POINT PLAN
CHAPITA WELLS UNIT 3005-6GR
NW/SW, SEC. 6, T9S, R23E, S.L.B.&M.
UINTAH COUNTY, UTAH

6. **MUD PROGRAM:**

Surface Hole Procedure (0 - 500' ± below GL):

Air/air mist or aerated water

Production Hole Procedure (500' ± - TD):

Anticipated mud weight 9.0 – 9.5 ppg depending on actual wellbore condition encountered while drilling.

500'± - TD A closed mud system will be utilized. A bentonite gelled water mud system will be used to control viscosity w/PHPA polymer used for supplemental viscosity and clay encapsulation/inhibition. Water loss will be maintained at <15cc's using white starch or PAC. Bactericides will be used as needed. Anticipated pH will range from 9.0-10.0. Mud weight will be adjusted as necessary for well control. Deflocculants/thinners will be used as necessary to maintain mud quality. LCM sweeps will be utilized as necessary to control lost circulation and mud loss. CO2 contamination, if encountered, will be treated with lime and gypsum.

7. **VARIANCE REQUESTS:**

Reference: Onshore Oil and Gas Order No. 2 – Item E: Special Drilling Operations

EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. Due to reduce location excavation, the blooie line will be approximately 75' in length

8. **EVALUATION PROGRAM:**

Logs: Mud log from base of surface casing to TD.

Open-hole Logs: BHC (Schlumberger Borehole Compensated Sonic)

Schlumberger Platform Express consisting: of Open-hole gamma ray, resistivity, bulk density, and neutron porosity

9. **CEMENT PROGRAM:**

Surface Hole Procedure (0-500' ± Below GL)

Lead: Class 'G' cement with 2% S1 (CaCl₂) & 0.25 pps
D29 (cellophane flakes), mixed at 15.8 ppg, 1.16 ft³./sk., 4.95 gps water.

Top Out: Top out with Class 'G' cement with 2% S1 (CaCl₂) in mix water, 15.8 ppg, 1.16 ft³./sk., 4.95 gps via 1" tubing set at 25' if needed.

Install 6' x 4' cellar ring, drill rat and mouse holes with spud rig.

Note: **Cement volumes will be calculated to bring cement to surface.**

EIGHT POINT PLAN
CHAPITA WELLS UNIT 3005-6GR
NW/SW, SEC. 6, T9S, R23E, S.L.B.&M.
UINTAH COUNTY, UTAH

CEMENT PROGRAM (Continued):

Production Hole Procedure (500' ± to TD)

Lead: 162 sks: 35:65 Poz "G" w/4% D20 (Bentonite), 2% D174 (Extender), 0.2% D65 (Dispersant), 0.2% D46 (Antifoam), 0.75% D112 (Fluid Loss Additive), 0.200% D13 (Retarder), 0.25 pps D29 (cello flakes) mixed at 13.0 ppg, 1.75 ft³/sk., 9.19 gps water.

Tail: 505 sks: 50:50 Poz "G" w/ 2% D20 (Bentonite), 0.1% D46 (Antifoam), 0.075% D13 (Retarder), 0.2% D167 (Fluid Loss Additive), 0.2% D65 (Dispersant), mixed at 14.1 ppg, 1.28 ft³/sk., 5.9gps water.

Note: The above number of sacks is based on gauge-hole calculation.
Lead volume to be calculated to bring cement to 200'± above 9-5/8" casing shoe.
Tail volume to be calculated to bring cement to 400'± above top of Garden Gulch MBR.
Final Cement volumes will be based upon gauge-hole plus 45% excess.

10. ABNORMAL CONDITIONS:

Surface Hole (Surface - 500'±):

Lost circulation

Production Hole (500'± - TD):

Sloughing shales, lost circulation and key seat development are possible in the Garden Gulch Formation.

11. STANDARD REQUIRED EQUIPMENT:

- A. Choke Manifold
- B. Upper and Lower Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

12. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.


(Attachment: BOP Schematic Diagram)

3000 PSIG DIAGRAM

ANNULAR PREVENTOR AND BOTH RAMS ARE 3000 PSIG RATED.
 CASING FLANGE IS 11" 3000 PSIG RATED.
 BOPE 11" 3000 PSIG

TESTING PROCEDURE:

1. BOPE's will be tested with a professional tester to conform to Onshore Order #2 with retest every 14 days.
2. Blind & Pipe rams will be tested to rated working pressure, 3000 psig.
3. Annular preventor will be tested to 50% of working pressure, 1500 psig.
4. Casing will be tested to 0.22 psi/ft. or 1500 psig. Not to exceed 70% of burst strength, whichever is greater.
5. All lines subject to well pressure will be pressure-tested to the same pressure as blind & pipe rams.
6. All BOPE specifications and configurations will meet Onshore Order #2 requirements for 3000 psig BOPE specifications.

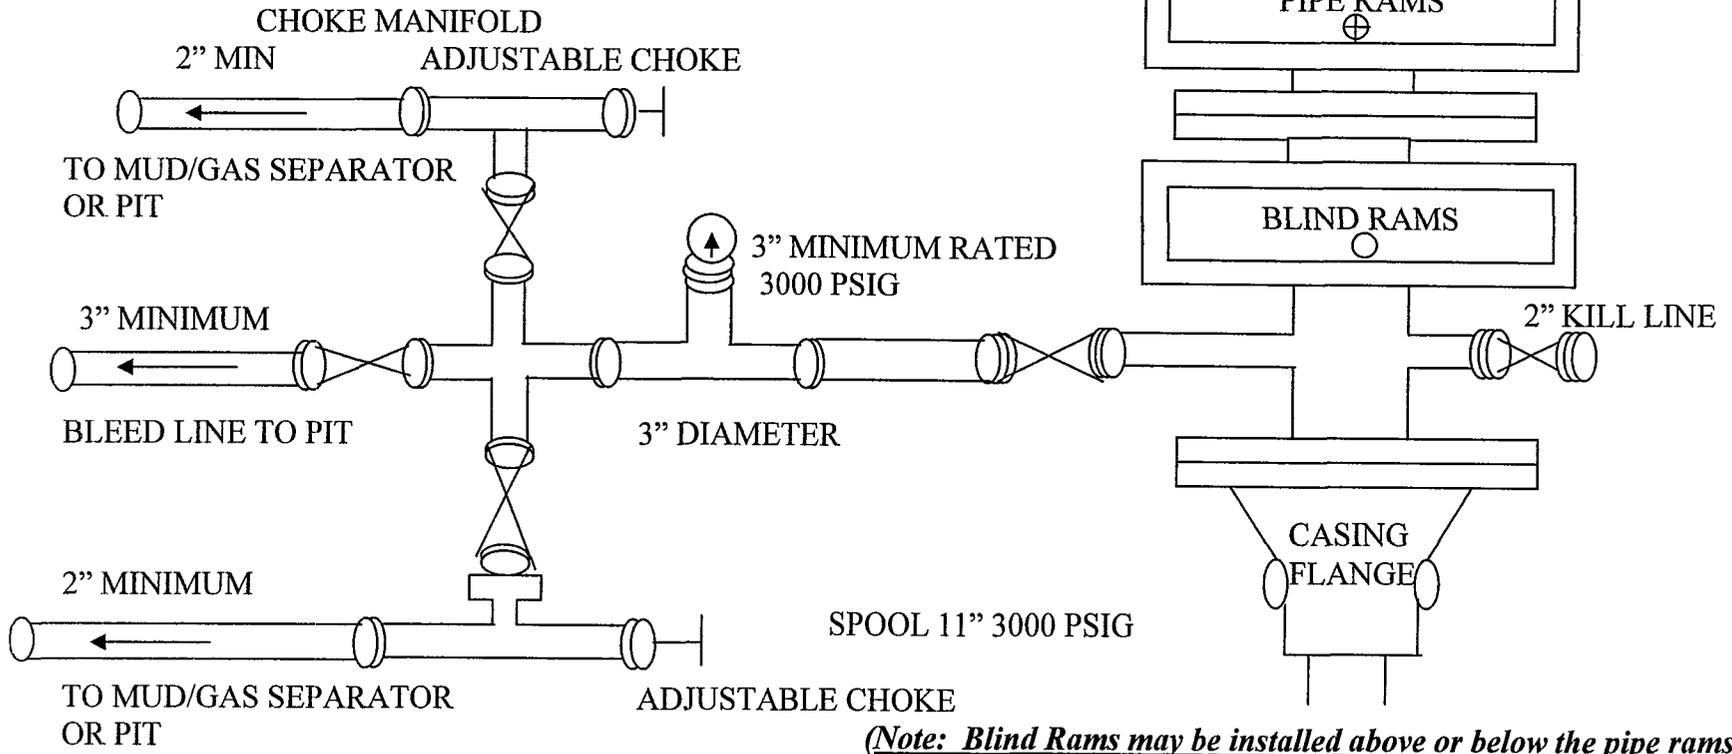

**CONDITIONS OF APPROVAL
FOR THE SURFACE USE PROGRAM OF THE
APPLICATION FOR PERMIT TO DRILL**

Company/Operator: EOG Resources, Inc.
Well Name & Number: Chapita Wells Unit 3005-6GR
Lease Number: U-01304
Location: 2081' FSL & 473' FWL, NW/SW (Lot 6), Sec. 6,
T9S, R23E, S.L.B.&M., Uintah County, Utah
Surface Ownership: Federal

NOTIFICATION REQUIREMENTS

Location Construction - forty-eight (48) hours prior to construction of location and access roads.

Location Completion - prior to moving on the drilling rig.

Spud Notice: - at least twenty-four (24) hours prior to spudding the well.

Casing String and Cementing - twenty-four (24) hours prior to running casing and cementing all casing strings.

BOP and related Equipment Tests - twenty-four (24) hours prior to running casing and tests.

First Production Notice - within five (5) business days after new Well begins or production resumes after Well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

THIRTEEN POINT SURFACE USE PROGRAM

1. EXISTING ROADS

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 18 miles southeast of Ouray, Utah - See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

2. PLANNED ACCESS ROAD

- A. An existing access road will be utilized to service this well. See attached TOPO Map "B".
- B. The access road has a 30 foot ROW w/ 18 foot running surface.
- C. Maximum grade on access road will be 8%.
- D. No turnouts will be required.
- E. **A high water crossing will be installed in the main drainage on the access road.** All other road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. **Additional culverts will be installed in the access road.**
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of-Way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by run off water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, EOG Resources, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

3. **LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION**

A. Abandoned wells - 1*

B. Producing wells - 16*

(*See attached TOPO map "C" for location)

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

A. **ON WELL PAD**

1. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of wellhead valves, combo separator-dehy unit with meter, 300 Bbl vertical or 200 Bbl low profile, condensate tank, and attaching piping.
2. Gas gathering lines - A 4" gathering line will be buried from dehy to the edge of the location.

B. **OFF WELL PAD**

1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
2. Protective measures and devices for livestock and wildlife will be taken and/or installed where required.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery.

The production facilities will be placed on the East side of the location.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within 6 months of installation. Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

The required paint color is Carlsbad Canyon.

If at any time the facilities located on public land and authorized by the terms of the lease are no longer included in the lease (due to a contraction

in the unit or other lease or unit boundary change), BLM will process a change in authorization to the appropriate statute. The authorization will be subject to appropriate rental or other financial obligation as determined by the authorized officer.

5. **LOCATION & TYPE OF WATER SUPPLY**

- A. Water supply will be from Ouray Municipal Water Plant at Ouray, Utah, and/or Target Trucking Inc.'s water source in the SW/SW, Sec. 35, T9S, R22E, Uintah County, Utah (State Water Right #49-1501). Produced water from the Chapita Wells and Stagecoach Units will also be used.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. **SOURCE OF CONSTRUCTION MATERIAL**

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of the location.
- B. All construction material will come from Federal Land.
- C. No mineral materials will be required.

7. **METHODS OF HANDLING WASTE DISPOSAL**

A. METHODS AND LOCATION

- 1. Cuttings will be confined in the reserve pit.
 - 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
 - 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah County Landfill.
 - 4. Produced wastewater will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. After the 90 day period, the produced water will be contained in a tank on location and then disposed of at one of the following three locations: Natural Buttes Unit 21-20B SWD, Ace Disposal, or EOG Resources, Inc. drilling operations (Chapita Wells Unit, Natural Buttes Unit & Stagecoach Unit).
 - 5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.
- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit or be removed and disposed of at an authorized disposal site. Introduction of well bore

hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

On BLM administered land:

The reserve pit will be constructed so as not to leak, break, or allow discharge. If the reserve pit requires padding prior to lining (due to rocky conditions) felt padding will be used.

The reserve pit shall be lined with felt and a 12 mill plastic liner.

8. **ANCILLARY FACILITIES**

A. No airstrips or camps are planned for this well.

9. **WELLSITE LAYOUT**

A. Refer to attached well site plat for related topography cuts and fills and cross sections.

B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.

C. Refer to attached well site plat for rig orientation, parking areas, and access road.

D. The approved seed mixture for this location is:

Hi-Crest Crested Wheatgrass – 9 pounds per acre

Kochia Prostrata – 3 pounds per acre.

The final abandonment seed mixture for this location is:

Gardner Salt Bush – 4 pounds per acre

Shad Scale – 3 pounds per acre

Hi-Crest Crested Wheat Grass – 2 pounds per acre

The existing reserve pit is located on the Northwest corner of the location. The flare pit is located downwind of the prevailing wind direction on the North side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled pit topsoil is stored separate from the location topsoil Northeast of Corner #5. The existing stockpiled location topsoil is on the Southwest side of the location. Upon completion of construction, the stockpiled topsoil from the location will be broadcast seeded with the approved seed mixture for this location and then walked down with a Caterpillar tractor.

Access to the well pad will be from the West.

Corners #2, #6, & #8 are rounded off to minimize excavation.

FENCING REQUIREMENTS:

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BLM or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is to be regularly traveled. If the well is a producer, the cattleguards (shall/shall not) be permanently mounted on concrete bases. Prior to crossing any fence located on Federal land, or any fence between Federal land and private land, the operator will contact the BLM, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

10. PLANS FOR RESTORATION OF SURFACE

A. PRODUCING LOCATION

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The stockpiled pit topsoil will then be spread over the pit area and broadcast seeded with the prescribed seed mixture for this location. The seeded area will then be walked down with a cat.

B. DRY HOLE/ABANDONED LOCATION

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BLM will attach the appropriate surface rehabilitation conditions of approval.

11. SURFACE OWNERSHIP

Access road: Federal

Location: Federal

12. OTHER INFORMATION

- A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to:
- whether the materials appear eligible for the National Register of Historic Places;
 - the mitigation measures the operator will likely have to undertake before the site can be used.
 - a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

- B. As operator, EOG Resources, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable

facilities. A list of noxious weeds will be obtained from the BLM, or the appropriate County Extension Office. On BLM administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.

- C. The drilling rig and ancillary equipment will be removed from the location prior to commencement of completion operations. Completion operations will be conducted utilizing a completion/workover rig.
- D. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on BLM lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

Additional Surface Stipulations

X No construction or drilling activities shall be conducted between May 15 and June 20 due to Antelope Stipulations.

Additional culverts will be installed in the access road.

A high water crossing will be installed in the main drainage on the access road.

LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION

PERMITTING AGENT

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Telephone: (435)789-4120
Fax: (435)789-1420

DRILLING OPERATIONS

Donald Presenkowski
EOG Resources, Inc.
P.O. Box 250
Big Piney, WY 83113
Telephone: (307)276-4865

All lease or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. EOG Resources, Inc. is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.


A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.

Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions that presently exist; that the statements made in the Plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by EOG Resources, Inc. and its contractors and subcontractors in conformity with this Plan and the terms and conditions under which it is approved.

Please be advised that EOG Resources, Inc. is considered to be the operator of the **Chapita Wells Unit 3005-6GR Well, located in the NW/SW of Section 6, T9S, R23E, Uintah County, Utah; Lease #U-01304;** and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond Coverage is provided under Bond #NM 2308.

11-23-2005
Date


Agent

EOG RESOURCES, INC.
CWU #3005-6GR
SECTION 6, T9S, R23E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; TURN LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 0.3 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 12.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; PROCEED IN A SOUTHEASTERLY, THEN NORTHEASTERLY DIRECTION APPROXIMATELY 2.4 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN RIGHT AND PROCEED IN AN EASTERLY, THEN NORTHEASTERLY DIRECTION APPROXIMATELY 0.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 0.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY DIRECTION APPROXIMATELY 1.3 MILES TO THE EXISTING CWU #582-1N AND AN EXISTING ROAD TO THE EAST; PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 0.4 MILES TO THE CWU #655-6 AND THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 49.0 MILES.

EOG RESOURCES, INC.

CWU #3005-6GR

LOCATED IN UINTAH COUNTY, UTAH
SECTION 6, T9S, R23E, S.L.B.&M.



PHOTO: VIEW FROM LOCATION STAKE TO CORNER #5

CAMERA ANGLE: SOUTHWESTERLY

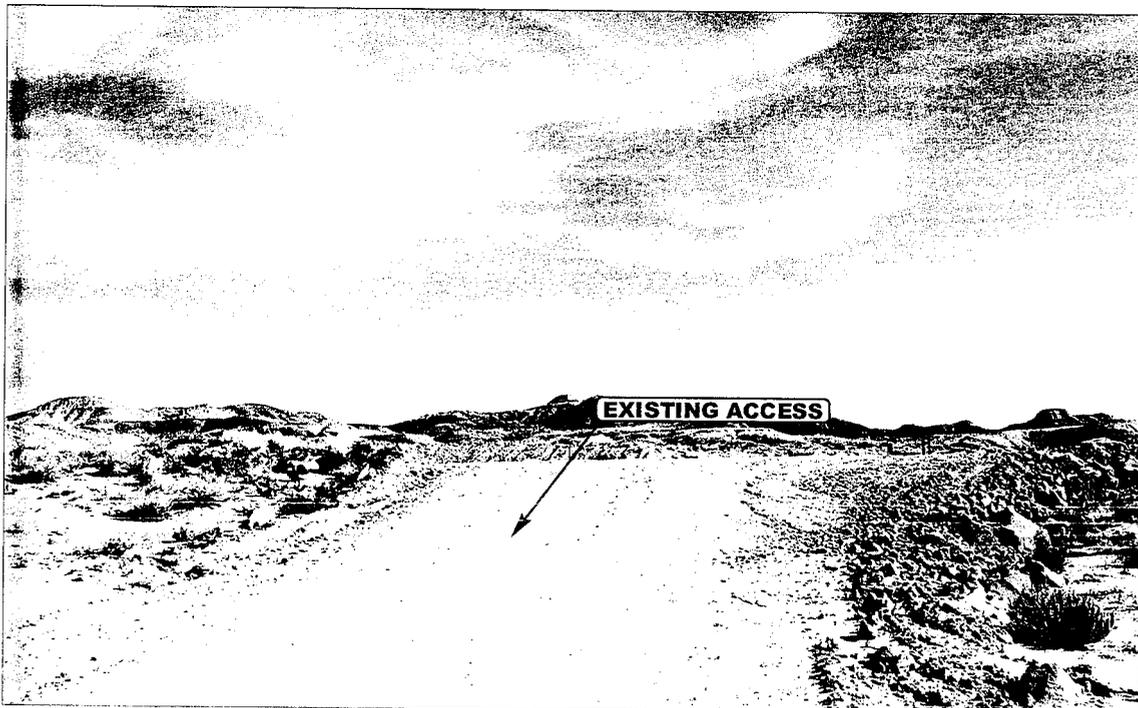


PHOTO: VIEW OF EXISTING ACCESS

CAMERA ANGLE: EASTERLY



- Since 1964 -


E&L Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS	11	03	05	PHOTO
	MONTH	DAY	YEAR	
TAKEN BY: T.B.	DRAWN BY: S.L.		REVISED: 00-00-00	

EOG RESOURCES, INC.

FIGURE #1

LOCATION LAYOUT FOR
 CWU #3005-6GR
 SECTION 6, T9S, R23E, S.L.B.&M.
 2081' FSL 473' FWL



Existing Drainage

Existing Catchment Basin

C-9.5'
 El. 74.5'

C-16.1'
 El. 81.1'

SCALE: 1" = 50'
 DATE: 11-7-05
 Drawn By: K.G.

NOTE:
 Flare Pit is to be located
 a min. of 100' from the
 Well Head.

CONSTRUCT
 DIVERSION
 DITCH

Existing
 Catchment
 Basin

FLARE PIT
 20' WIDE BENCH

El. 68.5'
 C-15.5'
 (btm. pit)

C-1.4'
 El. 66.4'

C-0.7'
 El. 65.7'

Existing Reserve Pit Backfill
 & Spoils Stockpile

Existing Pit


Existing Reserve Pit Backfill
 & Spoils Stockpile

RESERVE PITS
 (12' Deep)

Pit Extension
 Total Pit Capacity
 W/2' Of Freeboard
 = 2,310 Bbls. ±
 Total Pit Volume
 = 610 Cu. Yds.

NOTES:

FINISHED GRADE ELEV. = 4865.0'

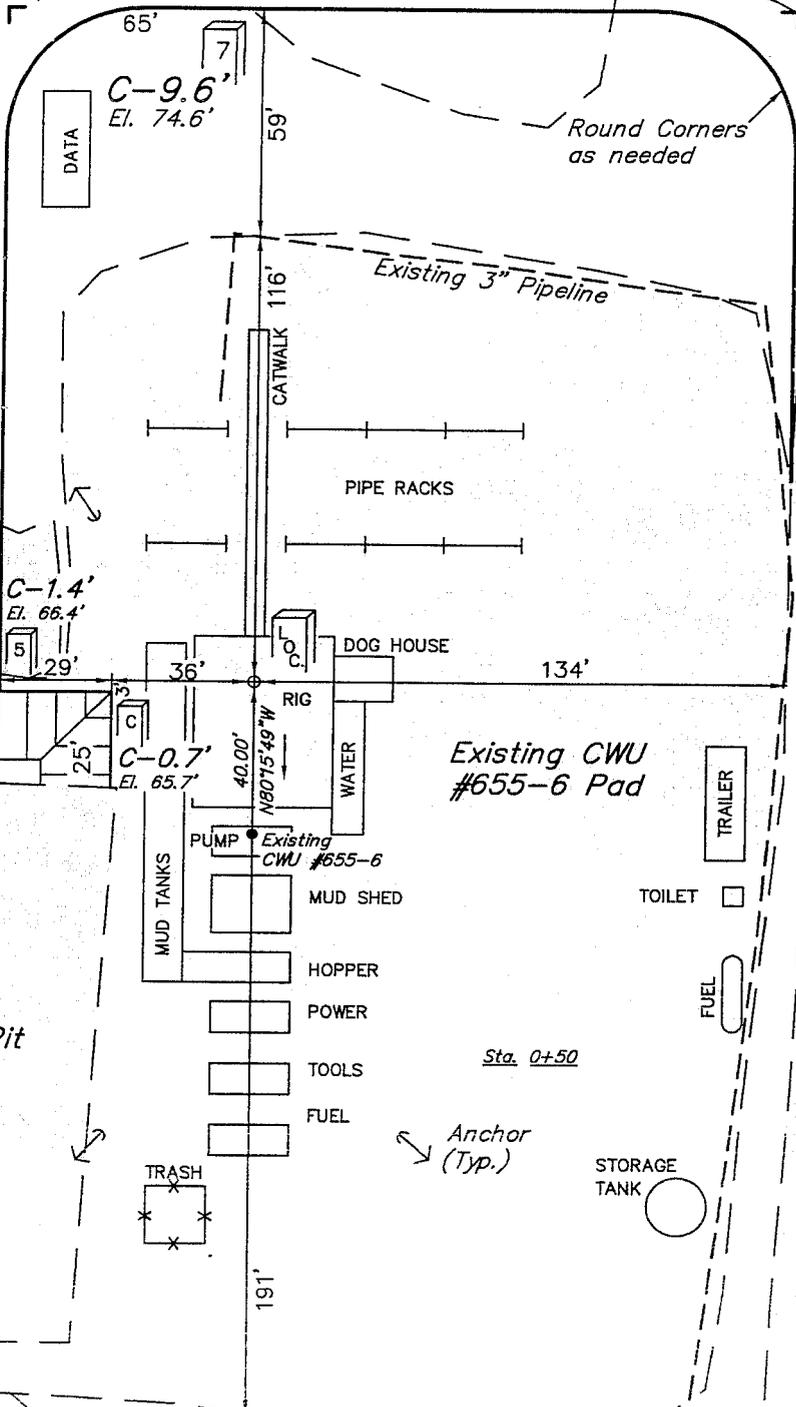

Existing CWU
 #655-6 Pad

Sta. 0+50

Anchor
 (Typ.)

Existing Access
 Road

UINTAH ENGINEERING & LAND SURVEYING
 85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

[Handwritten signature]

EOG RESOURCES, INC.

FIGURE #2

TYPICAL CROSS SECTIONS FOR



CWU #3005-6GR

SECTION 6, T9S, R23E, S.L.B.&M.

2081' FSL 473' FWL



1" = 20'
 X-Section
 Scale
 1" = 50'
 DATE: 11-7-05
 Drawn By: K.G.

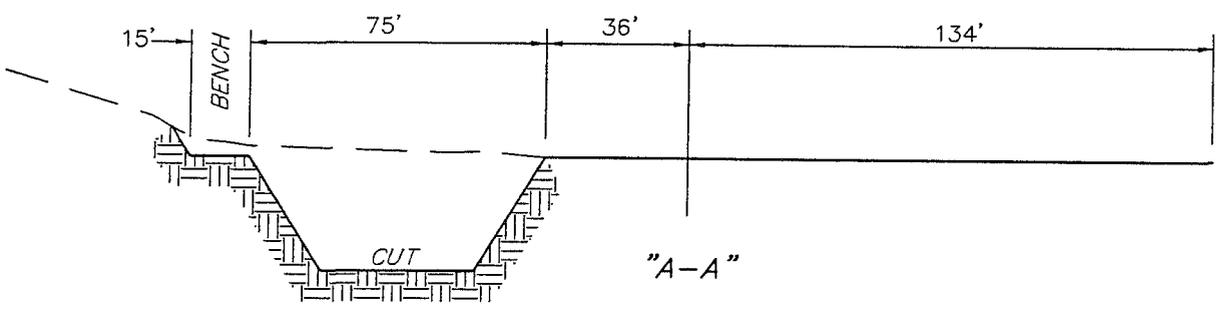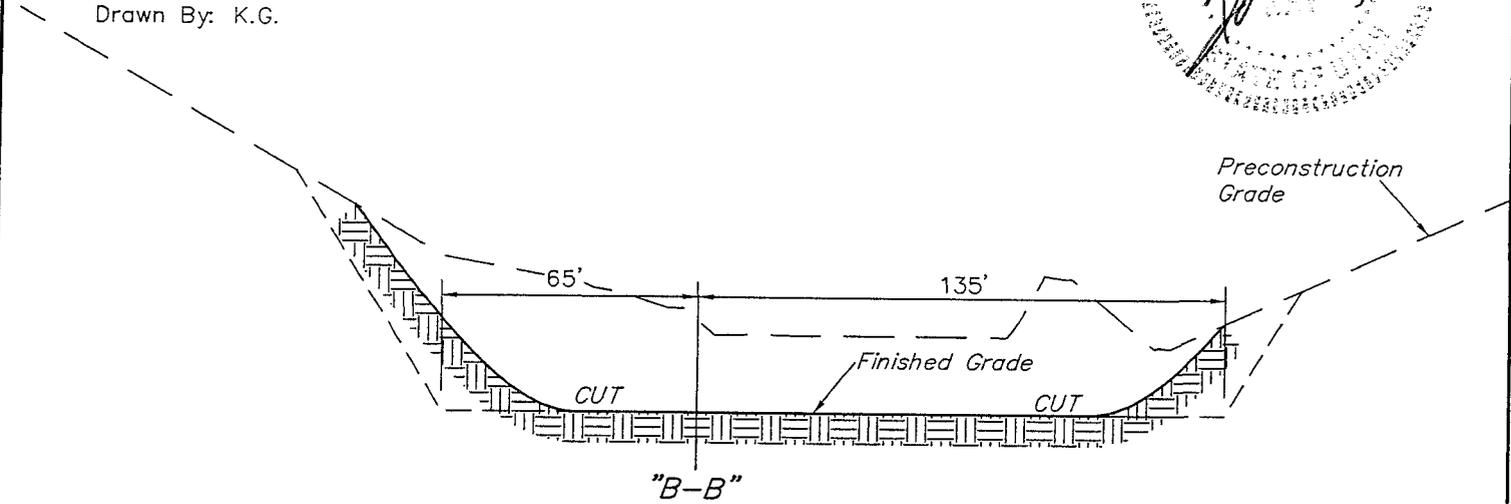


* NOTE:
 FILL QUANTITY INCLUDES
 5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 550 Cu. Yds.
(New Construction Only)	
Remaining Location	= 5,950 Cu. Yds.
TOTAL CUT	= 6,500 CU.YDS.
FILL	= 0 CU.YDS.

EXCESS MATERIAL	= 6,500 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 860 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 5,640 Cu. Yds.

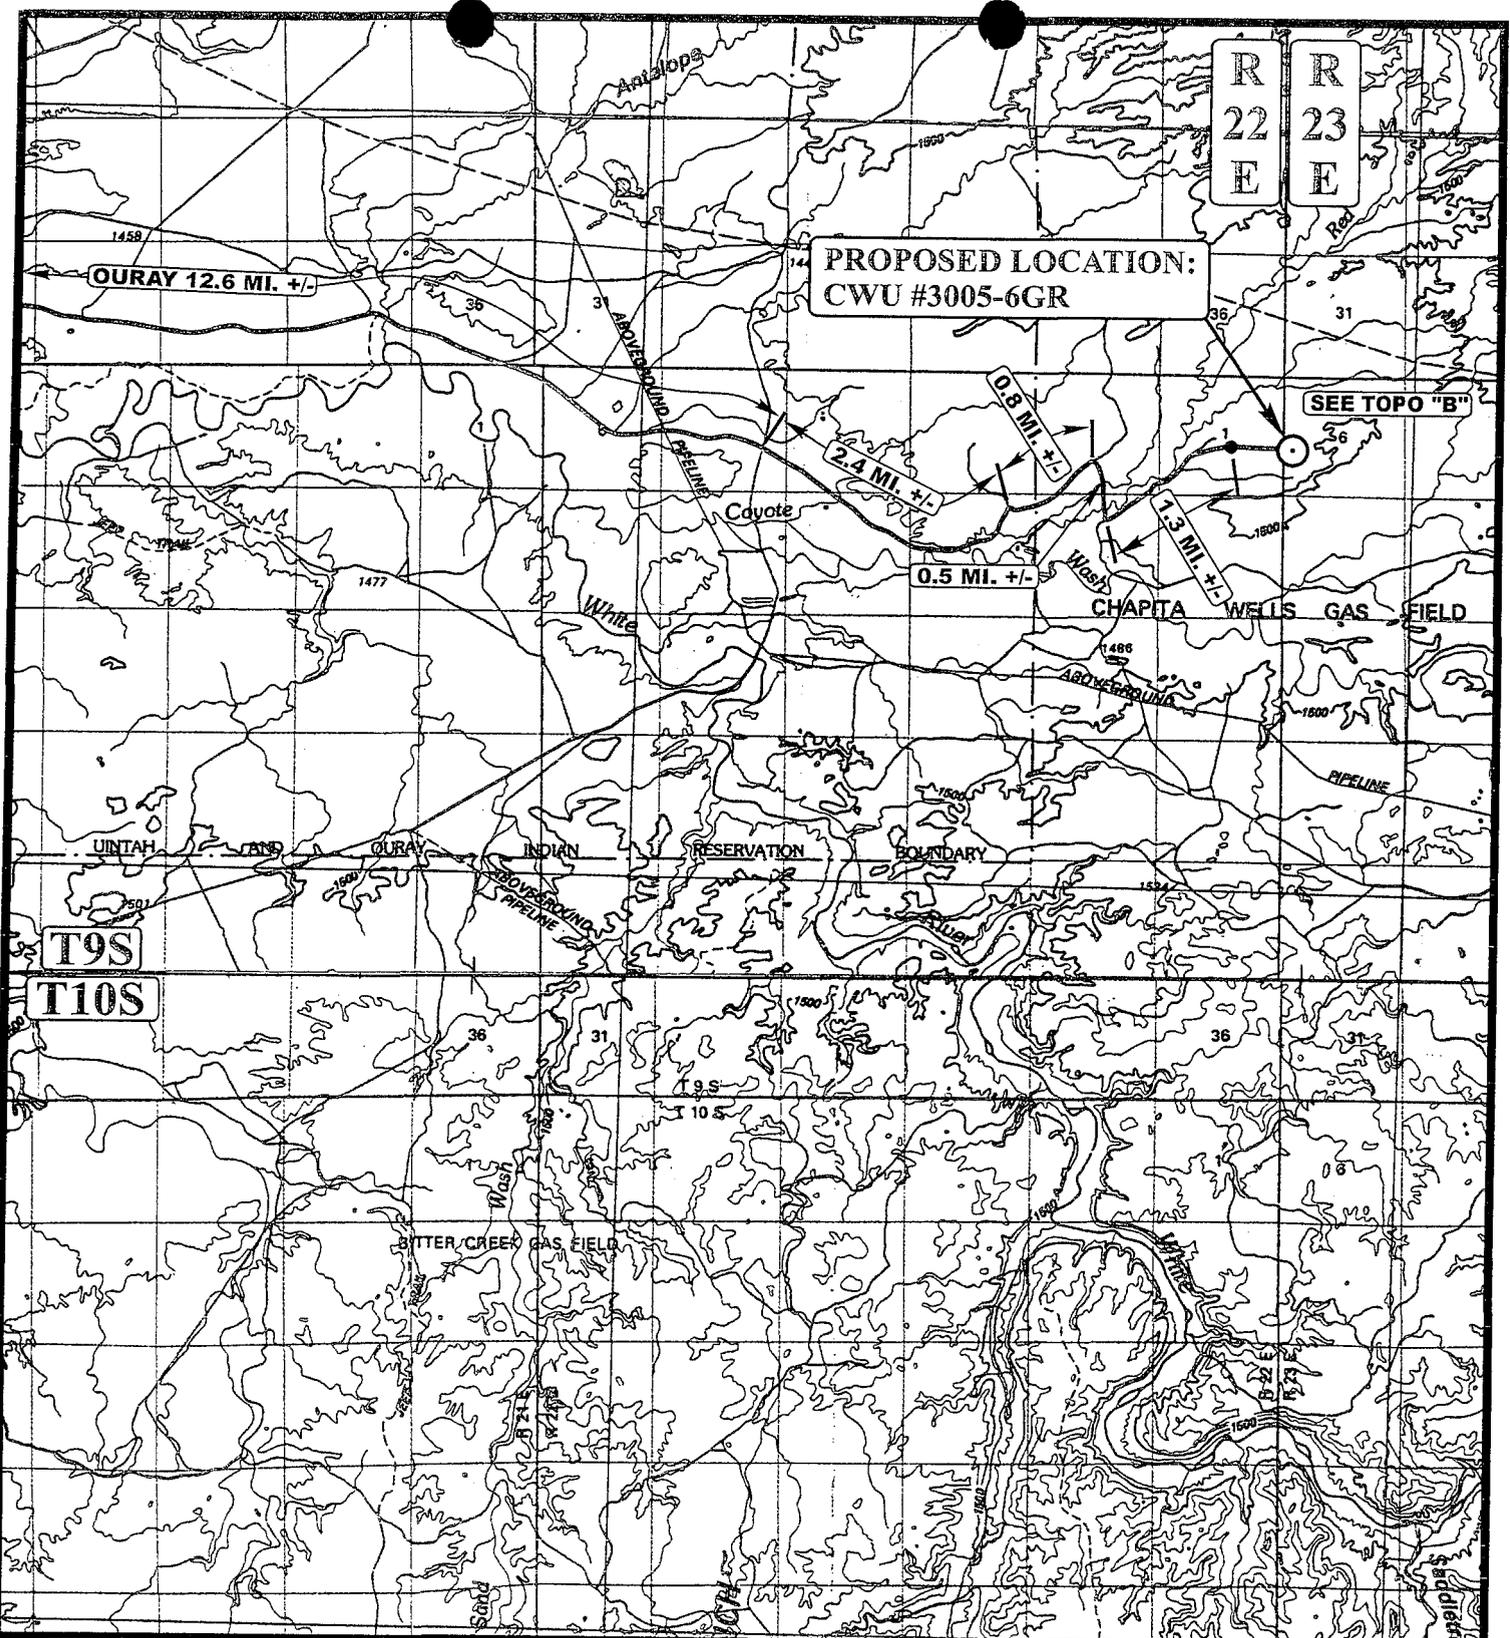

**PROPOSED LOCATION:
CWU #3005-6GR**

SEE TOPO "B"

T9S

T10S

R 22 E
R 23 E

LEGEND:

○ PROPOSED LOCATION



EOG RESOURCES, INC.


CWU #3005-6GR
SECTION 6, T9S, R23E, S.L.B.&M.
2081' FSL 473' FWL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP
11 03 05
MONTH DAY YEAR
SCALE: 1:100,000 DRAWN BY: S.L. REVISED: 00-00-00



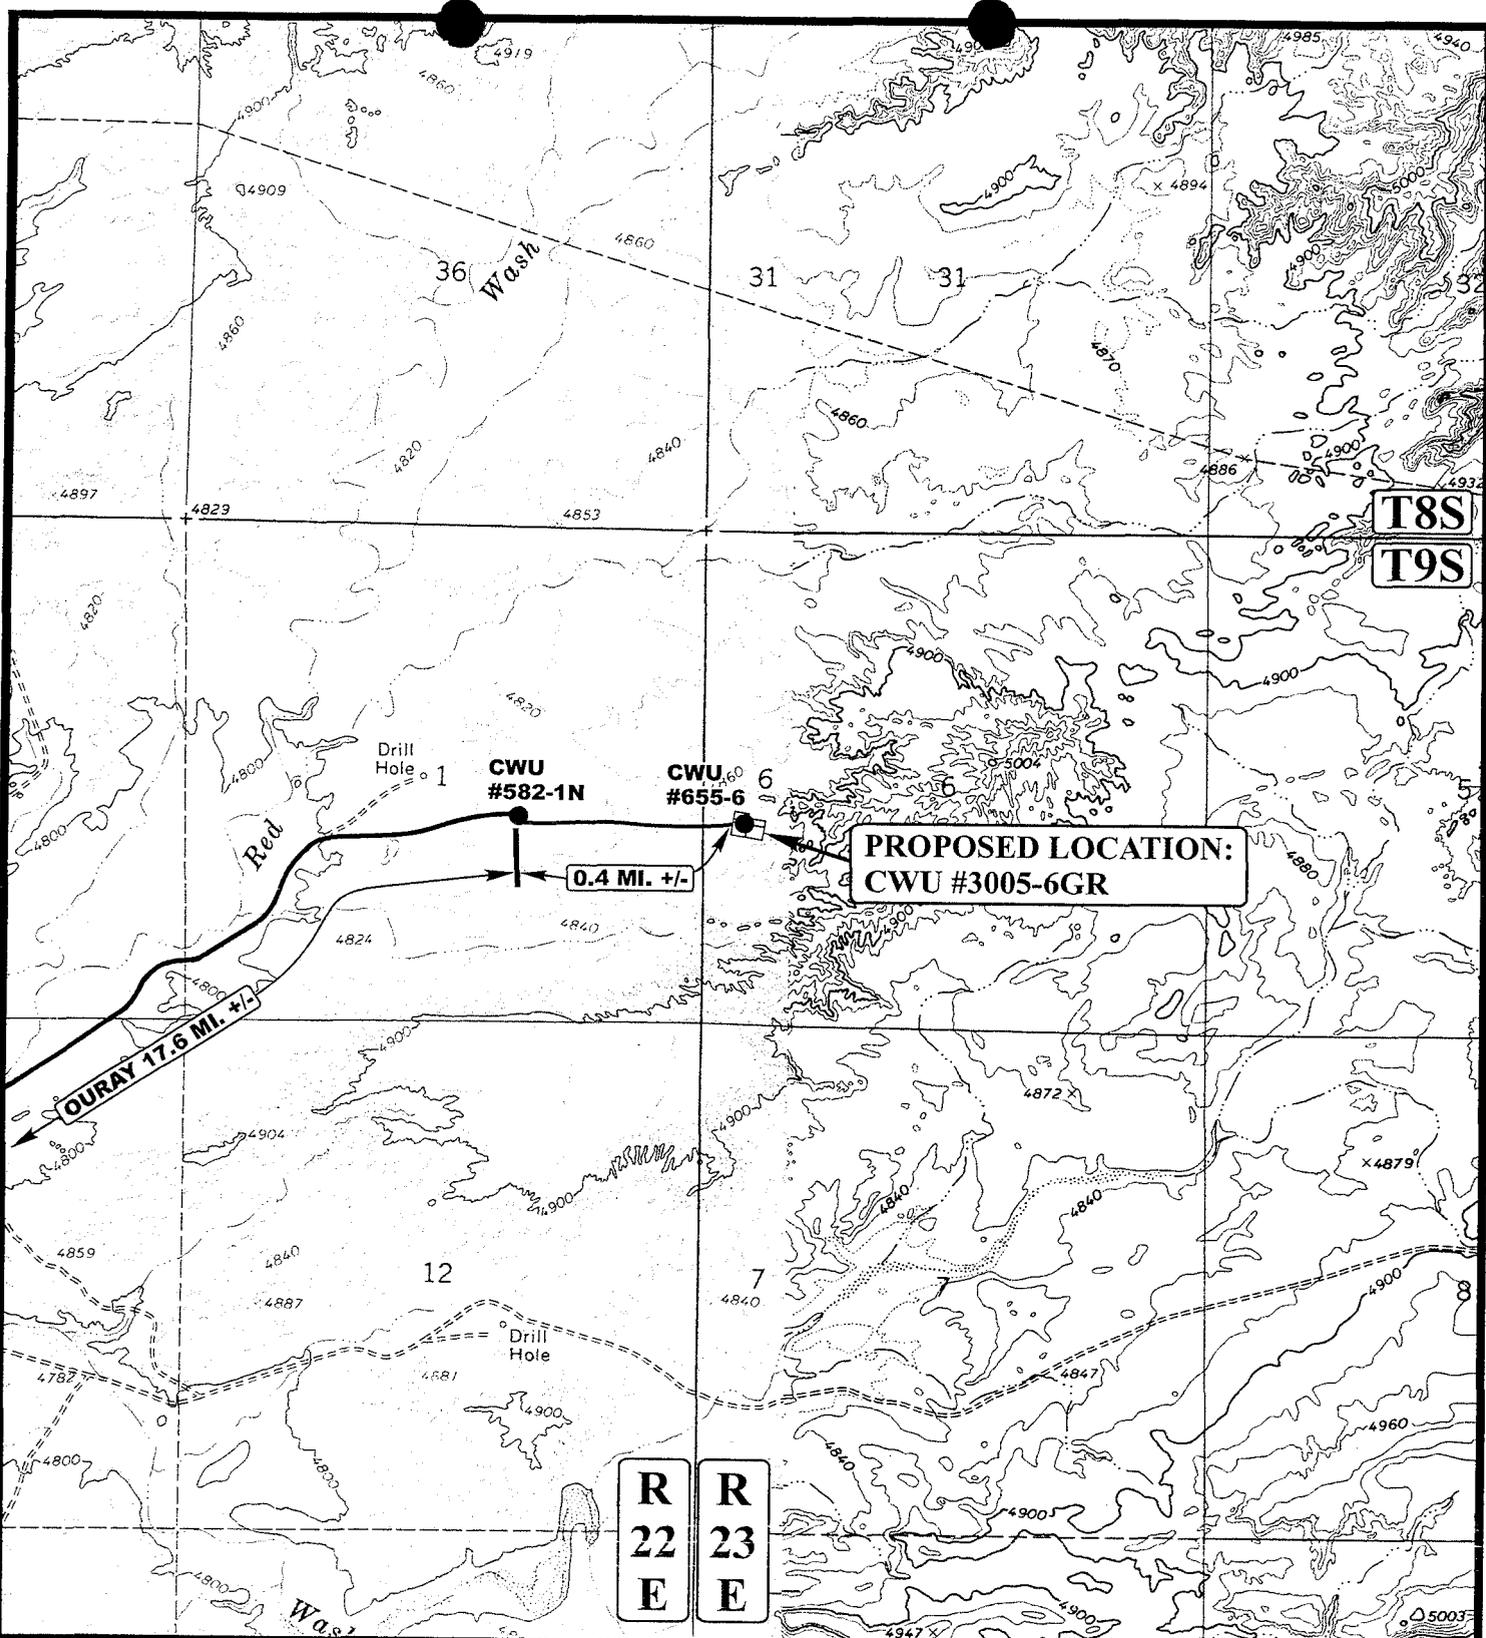

LEGEND:

— EXISTING ROAD



Utah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813




EOG RESOURCES, INC.

CWU #3005-6GR
SECTION 6, T9S, R23E, S.L.B.&M.
2081' FSL 473' FWL

TOPOGRAPHIC MAP 11 03 05
 MONTH DAY YEAR
 SCALE: 1" = 2000' DRAWN BY: S.L. REVISED: 00-00-00



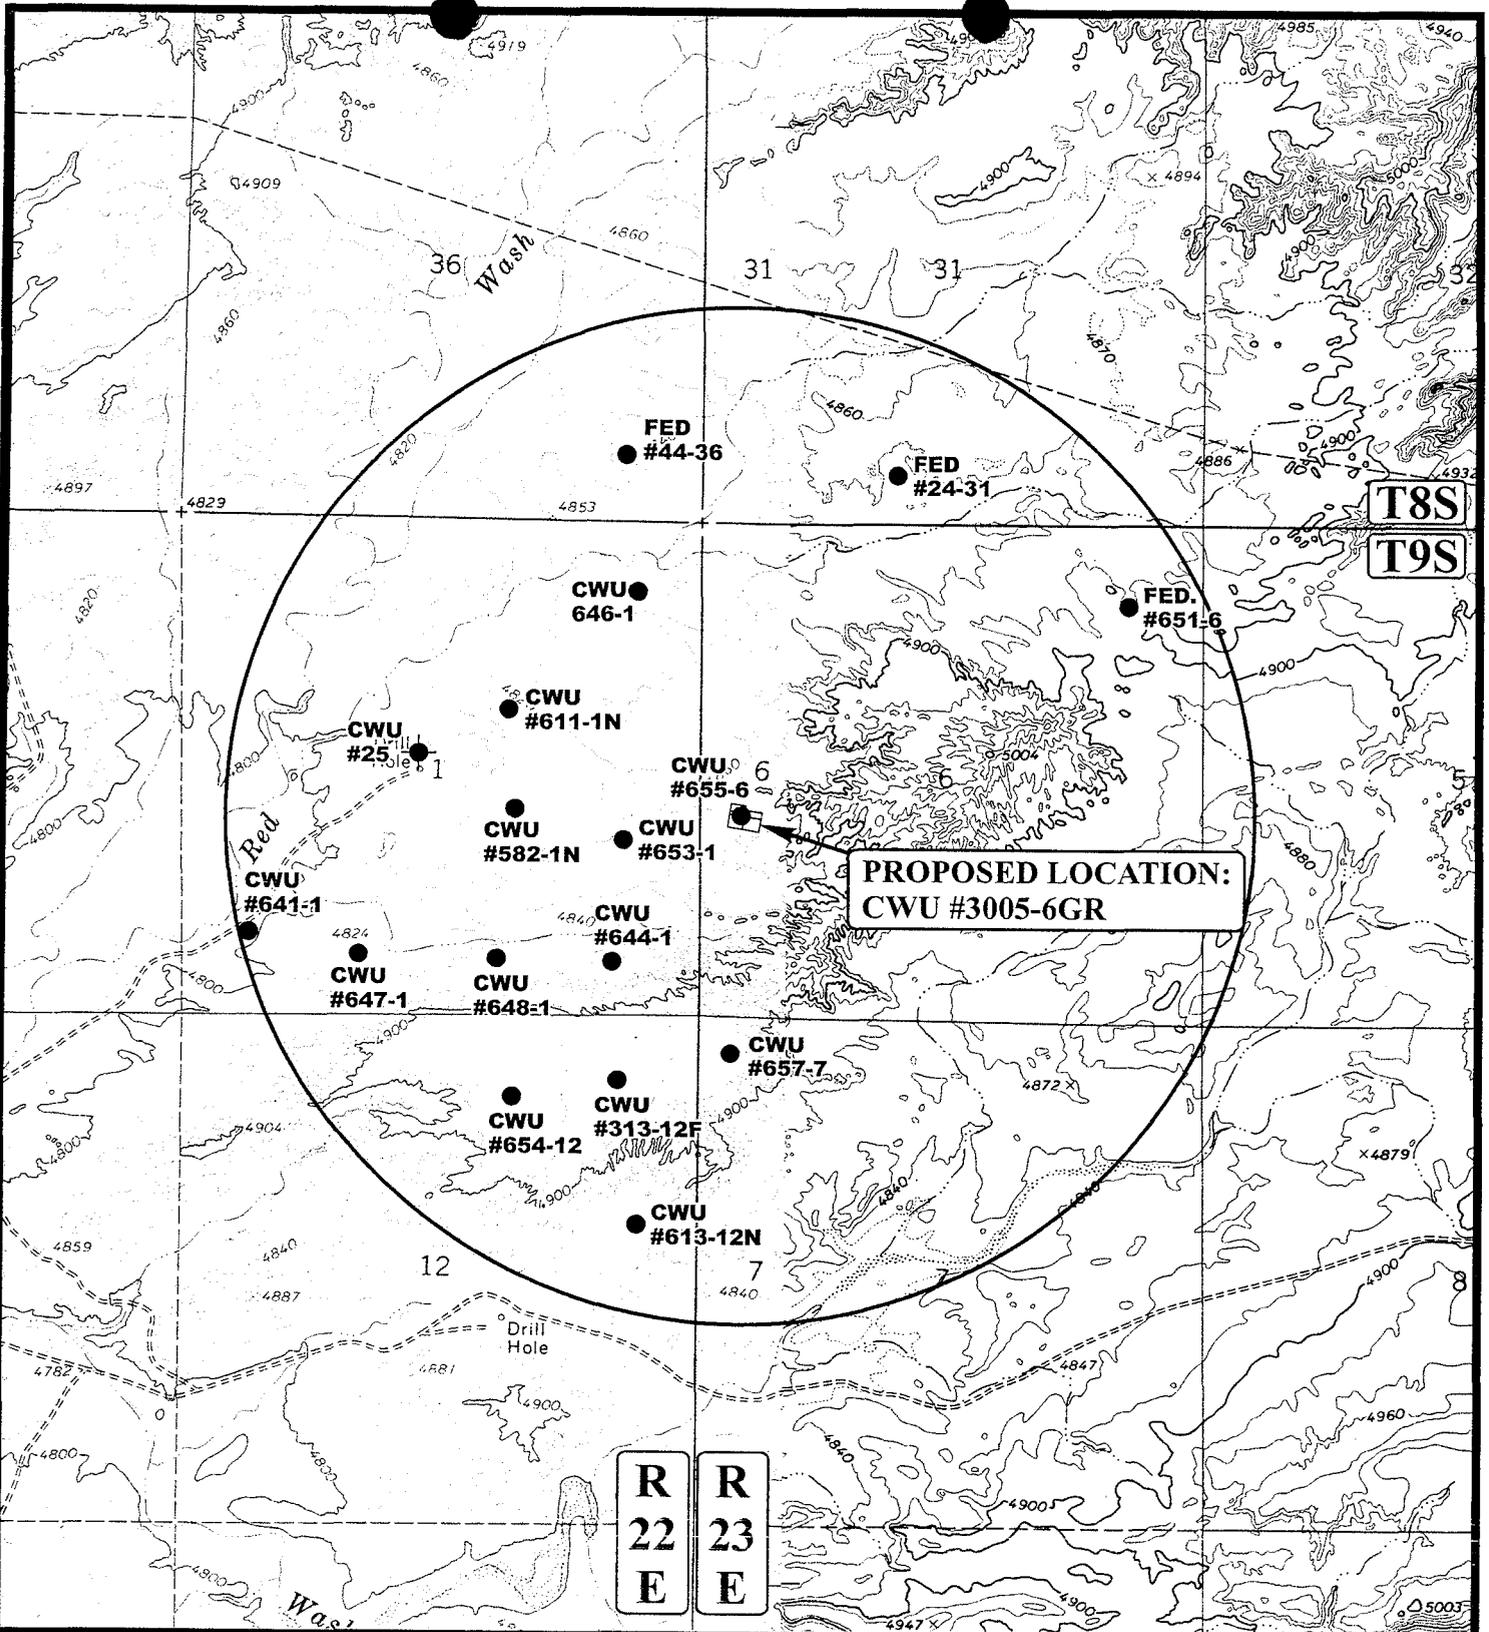

**PROPOSED LOCATION:
CWU #3005-6GR**

R 22 E **R 23 E**

LEGEND:

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ⊗ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED

EOG RESOURCES, INC.

CWU #3005-6GR
SECTION 6, T9S, R23E, S.L.B.&M.
2081' FSL 473' FWL

U&L
Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP **11 | 03 | 05**
 MONTH DAY YEAR
 SCALE: 1" = 2000' DRAWN BY: S.L. (REVISED: 00-00-00)



**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 12/14/2005

API NO. ASSIGNED: 43-047-37493

WELL NAME: CWU 3005-6GR
 OPERATOR: EOG RESOURCES INC (N9550)
 CONTACT: ED TROTTER

PHONE NUMBER: 435-789-4120

PROPOSED LOCATION:

NWSW 06 090S 230E
 SURFACE: 2081 FSL 0473 FWL
 BOTTOM: 2081 FSL 0473 FWL
 UINTAH
 NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal
 LEASE NUMBER: U-01304
 SURFACE OWNER: 1 - Federal
 PROPOSED FORMATION: CSLPK
 COALBED METHANE WELL? NO

LATITUDE: 40.06360
 LONGITUDE: -109.3766

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. NM-2308)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 49-1501)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)

LOCATION AND SITING:

- R649-2-3.
- Unit CHAPITA WELLS
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: 179-8
Eff Date: 8-10-1999
Siting: Suspend General Siting
- R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: Federal Approval



**NATURAL BUTTES FIELD
CHAPITA WELLS UNIT**

CAUSE: 179-8 / 8-10-1999

OPERATOR: EOG RESOURCES INC (N9550)
 SEC: 6,18 T. 9S R. 23E
 FIELD: NATURAL BUTTES (630)
 COUNTY: UINTAH
 CAUSE: 179-8 / 8-10-1999

Field Status	Unit Status
ABANDONED	EXPLORATORY
ACTIVE	GAS STORAGE
COMBINED	NF PP OIL
INACTIVE	NF SECONDARY
PROPOSED	PENDING
STORAGE	PI OIL
TERMINATED	PP GAS
	PP GEOTHERML
	PP OIL
	SECONDARY
	TERMINATED

Wells Status

GAS INJECTION
GAS STORAGE
LOCATION ABANDONED
NEW LOCATION
PLUGGED & ABANDONED
PRODUCING GAS
PRODUCING OIL
SHUT-IN GAS
SHUT-IN OIL
TEMP. ABANDONED
TEST WELL
WATER INJECTION
WATER SUPPLY
WATER DISPOSAL
DRILLING



PREPARED BY: DIANA WHITNEY
 DATE: 19-DECEMBER-2005

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:
3160
(UT-922)

January 12, 2006

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2005 Plan of Development Chapita Wells Unit Uintah County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2005 within the Chapita Wells Unit, Uintah County, Utah.

API #	WELL NAME	LOCATION
(Proposed PZ Green River)		
43-047-37493	CWU 3005-6GR Sec 06 T09S R23E 2081 FSL 0473 FWL	
(Proposed PZ Wasatch)		
43-047-37504	CWU 696-25 Sec 25 T09S R22E 2151 FNL 1963 FEL	
43-047-37503	CWU 702-25 Sec 25 T09S R22E 0624 FNL 1954 FWL	
43-047-37499	CWU 681-28 Sec 28 T09S R23E 0646 FSL 0754 FWL	
43-047-37500	CWU 703-29 Sec 29 T09S R23E 1777 FSL 0540 FEL	
43-047-37494	CWU 689-33 Sec 33 T09S R23E 1831 FSL 2061 FWL	
(Proposed PZ Price River)		
43-047-37495	CWU 1118-22 Sec 22 T09S R23E 1859 FSL 0463 FEL	
43-047-37496	CWU 1117-22 Sec 22 T09S R23E 1952 FSL 2134 FWL	
43-047-37501	CWU 1082-30 Sec 30 T09S R23E 1050 FNL 0380 FWL	
43-047-37497	CWU 1147-18 Sec 18 T09S R23E 0680 FNL 0680 FEL	
43-047-37498	CWU 1142-18 Sec 18 T09S R23E 0737 FNL 1928 FWL	
43-047-37505	CWU 1076-25 Sec 25 T09S R22E 1687 FSL 2224 FEL	
43-047-37502	CWU 1088-22 Sec 22 T09S R22E 2400 FNL 2392 FEL	
43-047-37506	CWU 1042-28 Sec 28 T09S R22E 0313 FNL 1172 FEL	
43-047-37607	CWU 1040-10 Sec 10 T09S R22E 1150 FSL 1070 FWL	
43-047-37606	CWU 833-3 Sec 03 T09S R22E 0808 FSL 2129 FEL	
43-047-37608	CWU 1086-22 Sec 22 T09S R22E 0323 FNL 0174 FEL	
43-047-37609	CWU 1089-22 Sec 22 T09S R22E 2256 FNL 0939 FEL	
43-047-37610	CWU 1084-30 Sec 30 T09S R23E 1580 FNL 0980 FWL	

Page 2

This office has no objection to permitting the wells at this time.

/s/ Michael L. Coulthard

bcc: File - Chapita Wells Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron
Fluid Chron

MCoulthard:mc:1-12-06



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

January 17, 2006

EOG Resources, Inc.
P O Box 1815
Vernal, UT 84078

Re: Chapita Wells Unit 3005-6GR Well, 2081' FSL, 473' FWL, NW SW, Sec. 6,
T. 9 South, R. 23 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-37493.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: EOG Resources, Inc.
Well Name & Number Chapita Wells Unit 3005-6GR
API Number: 43-047-37493
Lease: U-01304

Location: NW SW Sec. 6 T. 9 South R. 23 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED
DEC 14 2005

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. U-01304	
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name	
2. Name of Operator EOG RESOURCES, INC.		7. If Unit or CA Agreement, Name and No. CHAPITA WELLS UNIT	
3a. Address P.O. BOX 1815 VERNAL, UT 84078		8. Lease Name and Well No. CHAPITA WELLS UNIT 3005-6GR	
3b. Phone No. (Include area code) (435)789-0790		9. API Well No. 43-047-37493	
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface 2081' FSL, 473' FWL NW/SW (Lot 6) At proposed prod. Zone		10. Field and Pool, or Exploratory NATURAL BUTTES	
14. Distance in miles and direction from nearest town or post office* 18 MILES SOUTHEAST OF OURAY, UTAH		11. Sec., T., R., M., or Blk. and Survey or Area SEC. 6, T9S, R23E, S.L.B.&M.	
15. Distance from proposed* location to nearest property or lease line, ft. 473' (Also to nearest drig. Unit line, if any)	16. No. of Acres in lease 2451	17. Spacing Unit dedicated to this well	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. See Topo Map C	19. Proposed Depth 5100'	20. BLM/BIA Bond No. on file NM-2308	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 4865.0 FEET GRADED GROUND	22. Approximate date work will start* UPON APPROVAL	23. Esti mated duration 45 DAYS	
24. Attachments			

Attachments
The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification.
- Such other site specific information and/or plans as may be required by the authorized office.

25. Signature 	Name (Printed/Typed) Ed Trotter	DEC 21 2006	Date November 23, 2005
Title Agent	DIV. OF OIL, GAS & MINING		

Approved by (Signature) 	Name (Printed/Typed) JERRY KENICKA	Date 12-7-2006
Title Assistant Field Manager Lands & Mineral Resources	Office VERNAL FIELD OFFICE	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of Approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)

NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED




UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company:	EOG Resources	Location:	Lot 6, Sec 6, T9S, R23E
Well No:	CWU 3005-6GR	Lease No:	UTU-01304
API No:	43-047-37493	Agreement:	Chapita Wells Unit

Petroleum Engineer:	Matt Baker	Office: 435-781-4490	Cell: 435-828-4470
Petroleum Engineer:	Michael Lee	Office: 435-781-4432	Cell: 435-828-7875
Supervisory Petroleum Technician:	Jamie Sparger	Office: 435-781-4502	Cell: 435-828-3913
Environmental Scientist:	Paul Buhler	Office: 435-781-4475	Cell: 435-828-4029
Environmental Scientist:	Karl Wright	Office: 435-781-4484	
Natural Resource Specialist:	Holly Villa	Office: 435-781-4404	
Natural Resource Specialist:	Melissa Hawk	Office: 435-781-4476	
Natural Resource Specialist:	Scott Ackerman	Office: 435-781-4437	
After Hours Contact Number:	435-781-4513	Fax:	435-781-4410

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a one-year period. An additional year extension may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

- | | | |
|---|---|---|
| Location Construction
(Notify Paul Buhler) | - | Forty-Eight (48) hours prior to construction of location and access roads. |
| Location Completion
(Notify Paul Buhler) | - | Prior to moving on the drilling rig. |
| Spud Notice
(Notify Petroleum Engineer) | - | Twenty-Four (24) hours prior to spudding the well. |
| Casing String & Cementing
(Notify Jamie Sparger) | - | Twenty-Four (24) hours prior to running casing and cementing all casing strings |
| BOP & Related Equipment Tests
(Notify Jamie Sparger) | - | Twenty-Four (24) hours prior to initiating pressure tests |
| First Production Notice
(Notify Petroleum Engineer) | - | Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days |

**SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

Conditions for Approval are in the APD

- Within 90 calendar days of the approval date for this Application for Permit to Drill (APD), the operator/lessee shall submit to the Authorized Officer (AO), on Sundry Notice Form 3160-5, an Interim Surface Reclamation Plan for surface disturbance on well pads, access roads, and pipelines. At a minimum, this will include the reshaping of the pad to the original contour to the extent possible; the respreading of the top soil up to the rig anchor points; and, the area reseeded using appropriate reclamation methods. The AO will provide written approval or concurrence within 30 calendar days of receipt. During interim management of the surface, use the following seed mix:
- The new location will be built on an existing location and so no additional pipeline will be required off location.
- Paleontological monitoring will be required on all surface disturbance activity, by a professional Paleontologist. If paleontological materials are uncovered during construction, the operator is to immediately stop work, and contact the Authorized Officer (AO). A report will be prepared by the Paleontologist and submitted to the BLM at the completion of surface disturbing activities.
- The portion of the well pad off of the existing pad will require monitoring by a qualified paleontologist during construction.

DOWNHOLE CONDITIONS OF APPROVAL

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

SITE SPECIFIC DOWNHOLE CONDITIONS OF APPROVAL

- Production casing cement shall be brought up and into the surface casing.
- A Cement Bond Log (CBL) shall be run from the production casing shoe to the surface casing shoe. A field copy of the CBL shall be submitted to the BLM Vernal Field Office.

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well. Any changes in operation must have prior approval from the BLM, Vernal Field Office Petroleum Engineers.
- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and NOT by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- The lessee/operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled and analyzed (a copy of the analyses to be submitted to the BLM Field Office in Vernal, Utah).

- All oil and gas shows shall be adequately tested for commercial possibilities, reported, and protected.
- The lessee/operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, etc.) to Peter Sokolosky or another geologist of the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- All shows of fresh water and minerals shall be reported and protected. A sample shall be taken of any water flows and a water analysis furnished the BLM, Vernal Field Office. All oil and gas shows shall be adequately tested for commercial possibilities, reported, and protected.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM, Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM, Vernal Field Office shall be obtained and notification given before resumption of operations.
- Chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- Any change in the program shall be approved by the BLM, Vernal Field Office. "Sundry Notices and Reports on Wells" (Form BLM 3160-5) shall be filed for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.
- Emergency approval may be obtained orally, but such approval does not waive the written report requirement. Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan pursuant to Onshore Oil & Gas Order No. 1 of 43 CFR 3164.1 and prior approval by the BLM, Vernal Field Office.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip

logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- A cement bond log (CBL) will be run from the production casing shoe to the surface casing shoe and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.
- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease shall have prior written approval from the BLM, Vernal Field Office.
- All measurement points shall be identified as point of sales or allocation for royalty determination prior to the installation of facilities.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM, Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM, Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- This APD is approved subject to the requirement that, shall the well be successfully completed for production, the BLM, Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and / or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL)

4A and needs prior approval from Field Office Petroleum Engineers.

- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9


SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: U-01304
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME: Chapita Wells Unit
2. NAME OF OPERATOR: EOG RESOURCES, INC.		8. WELL NAME and NUMBER: Chapita Wells Unit 3005-06GR
3. ADDRESS OF OPERATOR: 1060 East Highway 40 CITY VERNAL STATE UT ZIP 84078		9. API NUMBER: 43-047-37493
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2081 FSL 473 FWL 40.063567 LAT 109.377197 LON		10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NWSW 6 9S 23E S.L.B. & M		COUNTY: UINTAH
		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input checked="" type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: APD Extension Request
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 12-21-06
By: 

APD - NEW OPERATIONS
DATE: 12-22-06
RM

NAME (PLEASE PRINT) <u>Kaylene R. Gardner</u>	TITLE <u>Sr. Regulatory Assistant</u>
SIGNATURE 	DATE <u>12/20/2006</u>

(This space for State use only)

RECEIVED
DEC 21 2006



**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-37493
Well Name: Chapita Wells Unit 3005-6GR
Location: 2081 FSL 473 FWL (NWSW), Section 6, T9S, R23E S.L.B.&M
Company Permit Issued to: EOG RESOURCES, INC.
Date Original Permit Issued: 1/17/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

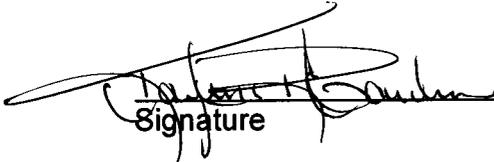
Signature

12/20/2006
Date

Title: Sr. Regulatory Assistant

Representing: EOG RESOURCES, INC.

RECEIVED
DEC 21 2006

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU01304

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

7. If Unit or CA/Agreement, Name and/or No.
UTU63013X

1. Type of Well
 Oil Well Gas Well Other

8. Well Name and No.
CWU 3005-6GR

2. Name of Operator
EOG RESOURCES INC
Contact: MARY A MAESTAS
E-Mail: mary_maestas@eogresources.com

9. API Well No.
43-047-37493-00-X1

3a. Address
1060 EAST HIGHWAY 40
VERNAL, UT 84078

3b. Phone No. (include area code)
Ph: 303-824-5526
Fx: 303-824-5527

10. Field and Pool, or Exploratory
NATURAL BUTTES

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 6 T9S R23E Lot 6 2081FSL 473FWL

11. County or Parish, and State
UINTAH COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Change to Original APD
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomplate in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. requests the APD for the referenced well, originally approved 12-7-06 be extended for two years.

VERNAL DIST.
ENG.
GEOL.
E.S.
PET.
A.M.

RECEIVED
NOV 07 2007
BLM

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #57069 verified by the BLM Well Information System
For EOG RESOURCES INC, sent to the Vernal
Committed to AFMSS for processing by GAIL JENKINS on 11/08/2007 (08GXJ0601SE)

RECEIVED
DEC 28 2007

Name (Printed/Typed) MARY A MAESTAS

Title REGULATORY ASSISTANT

Signature (Electronic Submission)

Date 11/07/2007

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By

Title **Petroleum Engineer** Date **DEC 11 2007**

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



**** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ****

CONDITIONS OF APPROVAL ATTACHED

Revisions to Operator-Submitted EC Data for Sundry Notice #57069

	Operator Submitted	BLM Revised (AFMSS)
Sundry Type:	OTHER NOI	APDCH NOI
Lease:	UTU01304	UTU01304
Agreement:	CHAPITA WELLS UNI	UTU63013X
Operator:	EOG RESOURCES INC 600 17TH STREET SUITE 1000N DENVER, CO 80202 Ph: 303-572-9000	EOG RESOURCES INC 1060 EAST HIGHWAY 40 VERNAL, UT 84078 Ph: 435.781.9111
Admin Contact:	MARY A MAESTAS REGULATORY ASSISTANT E-Mail: mary_maestas@eogresources.com Ph: 303-824-5526	MARY A MAESTAS REGULATORY ASSISTANT E-Mail: mary_maestas@eogresources.com Ph: 303-824-5526 Fx: 303-824-5527
Tech Contact:	MARY A MAESTAS REGULATORY ASSISTANT E-Mail: mary_maestas@eogresources.com Ph: 303-824-5526	MARY A MAESTAS REGULATORY ASSISTANT E-Mail: mary_maestas@eogresources.com Ph: 303-824-5526 Fx: 303-824-5527
Location:		
State:	UT	UT
County:	UINTAH	UINTAH
Field/Pool:	GREEN RIVER	NATURAL BUTTES
Well/Facility:	CHAPITA WELLS UNIT 3005-06GR Sec 6 T9S R23E NWSW 2081FSL 473FWL 40.06357 N Lat, 109.37720 W Lon	CWU 3005-6GR Sec 6 T9S R23E Lot 6 2081FSL 473FWL

CONDITIONS OF APPROVAL

EOG Resources, Inc.

Notice of Intent APD Extension

Lease: UTU-01304
Well: CWU 3005-6GR
Location: LOT 6 Sec 6-T9S-R23E

An extension for the referenced APD is granted with the following conditions:

1. The extension and APD shall expire on 12/7/08.
2. No other extension shall be granted.

If you have any other questions concerning this matter, please contact Ryan Angus of this office at (435) 781-4430

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS			5. LEASE DESIGNATION AND SERIAL NUMBER: U-01304
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.			6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
			7. UNIT or CA AGREEMENT NAME: Chapita Wells Unit
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____	2. NAME OF OPERATOR: EOG RESOURCES, INC.		8. WELL NAME and NUMBER: Chapita Wells Unit 3005-06GR
3. ADDRESS OF OPERATOR: 1060 East Highway 40 CITY VERNAL STATE UT ZIP 84078		PHONE NUMBER: (435) 789-0790	9. API NUMBER: 43-047-37493
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2081 FSL 473 FWL 40.063567 LAT 109.377197 LON			10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NWSW 6 9S 23E S.L.B. & M			COUNTY: UINTAH STATE: UTAH


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: APD Extension Request
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 01-10-08
By: 

COPY SENT TO OPERATOR
Date: 1-14-2008
Initials: KS

NAME (PLEASE PRINT) Kaylene R. Gardner TITLE Lead Regulatory Assistant
SIGNATURE  DATE 1/2/2008

(This space for State use only)

RECEIVED
JAN 10 2008
DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-37493
Well Name: CHAPITA WELLS UNIT 3005-06GR
Location: 2081 FSL 473 FWL (NWSW), SECTION 6, T9S, R23E S.L.B.&M
Company Permit Issued to: EOG RESOURCES, INC.
Date Original Permit Issued: 1/17/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

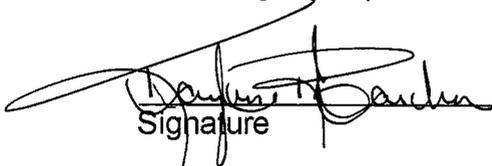

Signature

1/4/2007

Date

Title: Lead Regulatory Assistant

Representing: EOG Resources, Inc.

RECEIVED

JAN 10 2008

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

5. LEASE DESIGNATION AND SERIAL NUMBER:

UTU-01304

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

Chapita Wells

1. TYPE OF WELL

OIL WELL

GAS WELL

OTHER _____

8. WELL NAME and NUMBER:

Chapita Wells Unit 3005-06GR

2. NAME OF OPERATOR:

EOG Resources, Inc.

9. API NUMBER:

43-047-37493

3. ADDRESS OF OPERATOR:

1060 East Highway 40

VERNAL

UT

84078

PHONE NUMBER:

(435) 789-0790

10. FIELD AND POOL, OR WILDCAT:

Natural Buttes

4. LOCATION OF WELL

FOOTAGES AT SURFACE: 2081 FSL 473 FWL 40.063567 LAT 109.377197 LON

COUNTY: UINTAH

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NWSW 6 9S 23E S.L.B. & M

STATE:

UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input checked="" type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>APD Extension</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	<u>Request</u>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 01-07-09
By: [Signature]

NAME (PLEASE PRINT) Mickenzie Thacker

TITLE Operations Clerk

SIGNATURE [Signature]

DATE 12/29/2008

(This space for State use only)

COPY SENT TO OPERATOR

Date: 1-8-2009

Initials: KS

(See Instructions on Reverse Side)

RECEIVED

JAN 05 2009

DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-37493
Well Name: Chapita Wells Unit 3005-06GR
Location: 2081 FSL 473 FWL (NWSW), SECTION 6, T9S, R23E S.L.B.&M
Company Permit Issued to: EOG Resources, Inc.
Date Original Permit Issued: 1/17/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

Mickenzie Thacker
Signature

12/29/2008

Date

Title: Operations Clerk

Representing: EOG Resources, Inc.

RECEIVED

JAN 05 2009

DIV. OF OIL, GAS & MINING



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Green River District-Vernal Field Office

170 South 500 East

Vernal, UT 84078

(435) 781-4400 Fax: (435) 781-4410

<http://www.blm.gov/ut/st/en/fo/vernal/html>



IN REPLY REFER TO

3160

LLUTG01100

January 20, 2009

Kaylene R. Gardner
EOG Resources, Inc.
1060 East Highway 40
Vernal, UT 84078

43-047-37493

Re: Notice of Expiration
Well No. CWU 3005-6GR
Lot 6, Sec. 6, T9S, R23E
Uintah County, Utah
Lease No. UTU-01304
Chapita Wells Unit

Dear Ms. Gardner:

The Application for Permit to Drill (APD) the above-referenced well was approved on December 7, 2006. A two (2) year extension of the original APD was requested. The request was reviewed and the extension approved until December 7, 2008. According to our records, no known activity has transpired at the approved location. In view of the foregoing, this office is notifying you that the approval of the referenced application has expired. If you intend to drill at this location in the future, a new Application for Permit to Drill must be submitted.

This office requires a letter confirming that no surface disturbance has been made for this drill site. Any surface disturbance associated with the approved location of this well is to be rehabilitated. A schedule for this rehabilitation must be submitted to this office. Your cooperation in this matter is appreciated.

If you have any questions regarding this matter, please contact me at (435) 781-4455.

Sincerely,

Cindy Severson

Cindy Severson
Land Law Examiner

cc: UDOGM

RECEIVED

FEB 02 2009

DIV. OF OIL, GAS & MINING


STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: U-01304
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME: CHAPITA WELLS
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: CWU 3005-6GR
2. NAME OF OPERATOR: EOG Resources, Inc.	9. API NUMBER: 43047374930000
3. ADDRESS OF OPERATOR: 1060 East Highway 40 , Vernal, UT, 84078	PHONE NUMBER: 435 781-9111 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2081 FSL 0473 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWSW Section: 06 Township: 09.0S Range: 23.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 1/4/2010	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: _____

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
 EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the
 Utah Division of
 Oil, Gas and Mining

Date: January 11, 2010
By: 

NAME (PLEASE PRINT) Mickenzie Gates	PHONE NUMBER 435 781-9145	TITLE Operations Clerk
SIGNATURE N/A	DATE 1/4/2010	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047374930000

API: 43047374930000

Well Name: CWU 3005-6GR

Location: 2081 FSL 0473 FWL QTR NWSW SEC 06 TWNP 090S RNG 230E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 1/17/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

**Approved by the
Utah Division of
Oil, Gas and Mining**


Signature: Mickenzie Gates

Date: 1/4/2010

Title: Operations Clerk **Representing:** EOG RESOURCES, INC.

Date: January 11, 2010

By:



State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

May 13, 2010

Mickenzie Gates
EOG Resources Inc.
1060 East Highway 40
Vernal, Utah 84078

Re: APD Rescinded – CWU 3005-06GR, Sec. 6, T. 9S, R. 23E
Uintah County, Utah API No. 43-047-37493

Dear Ms. Gates:

The Application for Permit to Drill (APD) for the subject well was approved by the Division of Oil, Gas and Mining (Division) on January 17, 2006. On December 21, 2006, January 10, 2008, January 7, 2009 and January 11, 2010 the Division granted a one-year APD extension. On May 13, 2010, you requested that the division rescind the state approved APD. No drilling activity at this location has been reported to the division. Therefore, approval to drill the well is hereby rescinded, effective May 13, 2010.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,



Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal

