

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT
(highlight changes)

APPLICATION FOR PERMIT TO DRILL			5. MINERAL LEASE NO: ML-3276	6. SURFACE: State
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>			7. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>			8. UNIT or CA AGREEMENT NAME: NATURAL BUTTES UNIT	
2. NAME OF OPERATOR: WESTPORT OIL & GAS COMPANY, L.P.			9. WELL NAME and NUMBER: NBU 1022-16P	
3. ADDRESS OF OPERATOR: 1368 S 1200 E VERNAL UT 84078			PHONE NUMBER: (435) 781-7060	10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 724' FSL 973' FEL <i>633440x 39 943616</i> AT PROPOSED PRODUCING ZONE: <i>44224574 109.438094</i>			11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 16 10S 22E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 23.3 MILES SOUTHEAST OF OURAY, UTAH			12. COUNTY: UINTAH	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET): 724'	16. NUMBER OF ACRES IN LEASE: 480	17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 40		
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET): REFER TO TOPO C	19. PROPOSED DEPTH: 8,675	20. BOND DESCRIPTION: RLB0005238		
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 5300.7' GL	22. APPROXIMATE DATE WORK WILL START:	23. ESTIMATED DURATION: TO BE DETERMINED		

24. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT	SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT			
	14"	40				
12 1/4"	9 5/8" H-40 32.3#	2,000	PREM CMT	265 SX	1.18	15.6
7 7/8"	4 1/2" I-80 11.6#	8,750	PREM LITE II	380 SX	3.38	11
			50/50 POZ G	1390 SX	1.31	14.3

25. ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES

- | | |
|--|--|
| <input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER | <input checked="" type="checkbox"/> COMPLETE DRILLING PLAN |
| <input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER | <input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER |

NAME (PLEASE PRINT) DEBRA DOMENICI TITLE ASSOC. ENVIRONMENTAL ANALYST
SIGNATURE *Debra Domenici* DATE 2/8/2006


(This space for State use only)

API NUMBER ASSIGNED: 43-047-37766

APPROVAL:

FEB 14 2006

T10S, R22E, S.L.B.&M.

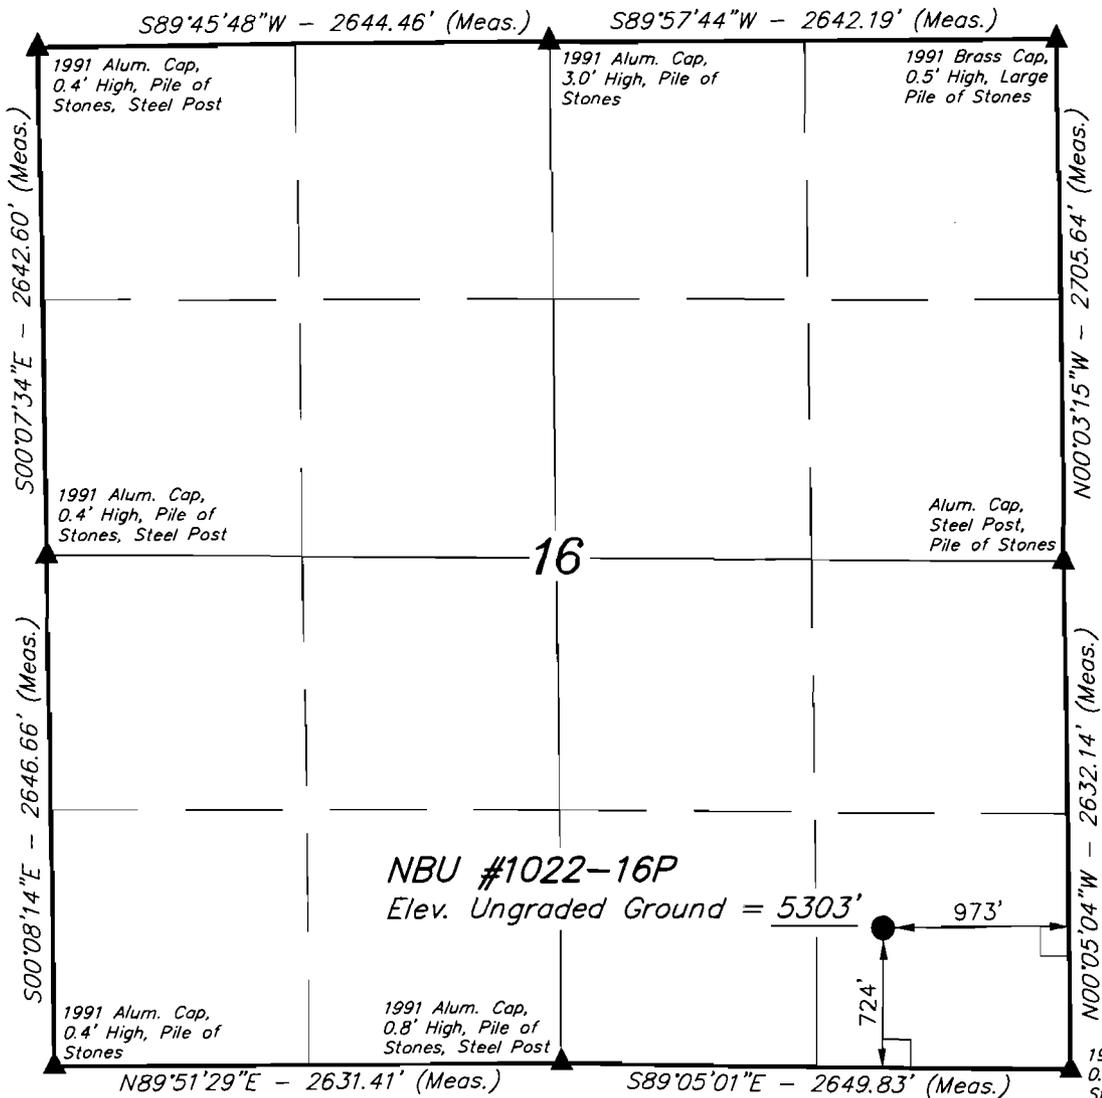

Kerr-McGee Oil & Gas Onshore LP


Well location, NBU #1022-16P, located as shown in the SE 1/4 SE 1/4 of Section 16, T10S, R22E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.



CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

[Signature]

REGISTERED LAND SURVEYOR
 REGISTRATION NO. 161319
 STATE OF UTAH

REVISED: 01-15-06

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)
 LATITUDE = $39^{\circ}56'37.10''$ (39.943639)
 LONGITUDE = $109^{\circ}26'19.68''$ (109.438800)
 (NAD 27)
 LATITUDE = $39^{\circ}56'37.22''$ (39.943672)
 LONGITUDE = $109^{\circ}26'17.22''$ (109.438117)

UINTAH ENGINEERING & LAND SURVEYING

85 SOUTH 200 EAST - VERNAL, UTAH 84078

(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 12-06-05	DATE DRAWN: 12-17-05
PARTY P.J. N.F. P.M.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE Kerr-McGee Oil & Gas Onshore LP	

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT
(highlight changes)

APPLICATION FOR PERMIT TO DRILL			5. MINERAL LEASE NO. ML-3276	6. SURFACE State
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>			7. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>			8. UNIT or CA AGREEMENT NAME: NATURAL BUTTES UNIT	
2. NAME OF OPERATOR: WESTPORT OIL & GAS COMPANY, L.P.			9. WELL NAME and NUMBER: NBU 1022-16P	
3. ADDRESS OF OPERATOR: 1368 S 1200 E VERNAL UT 84078		PHONE NUMBER: (435) 781-7060	10. FIELD AND POOL, OR WILDCAT NATURAL BUTTES	
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 724' FSL 973' FEL <i>633440x 3A 943616</i> AT PROPOSED PRODUCING ZONE: <i>44224574 109.438094</i>			11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 16 10S 22E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 23.3 MILES SOUTHEAST OF OURAY, UTAH			12. COUNTY: UINTAH	13. STATE UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 724'	16. NUMBER OF ACRES IN LEASE 480	17. NUMBER OF ACRES ASSIGNED TO THIS WELL 40		
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) REFER TO TOPO C	19. PROPOSED DEPTH: 8,675	20. BOND DESCRIPTION RLB0005238		
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 5300.7' GL	22. APPROXIMATE DATE WORK WILL START	23. ESTIMATED DURATION: TO BE DETERMINED		

24. **PROPOSED CASING AND CEMENTING PROGRAM**

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT	SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT			
	14"	40				
12 1/4"	9 5/8" H-40 32.3#	2,000	PREM CMT	265 SX	1.18	15.6
7 7/8"	4 1/2" I-80 11.6#	8,750	PREM LITE II	380 SX	3.38	11
			50/50 POZ G	1390 SX	1.31	14.3

25. **ATTACHMENTS**

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES

<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER	<input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER

NAME (PLEASE PRINT) DEBRA DOMENICI TITLE ASSOC. ENVIRONMENTAL ANALYST

SIGNATURE *Debra Domenici* DATE 2/8/2006

(This space for State use only)

API NUMBER ASSIGNED: 43-047-37766

**Approved by the
Utah Division of
Oil, Gas and Mining**


Date: 2-15-06
[Signature]

FEB 14 2006

T10S, R22E, S.L.B.&M.

Kerr-McGee Oil & Gas Onshore LP

Well location, NBU #1022-16P, located as shown in the SE 1/4 SE 1/4 of Section 16, T10S, R22E, S.L.B.&M. Uintah County, Utah.

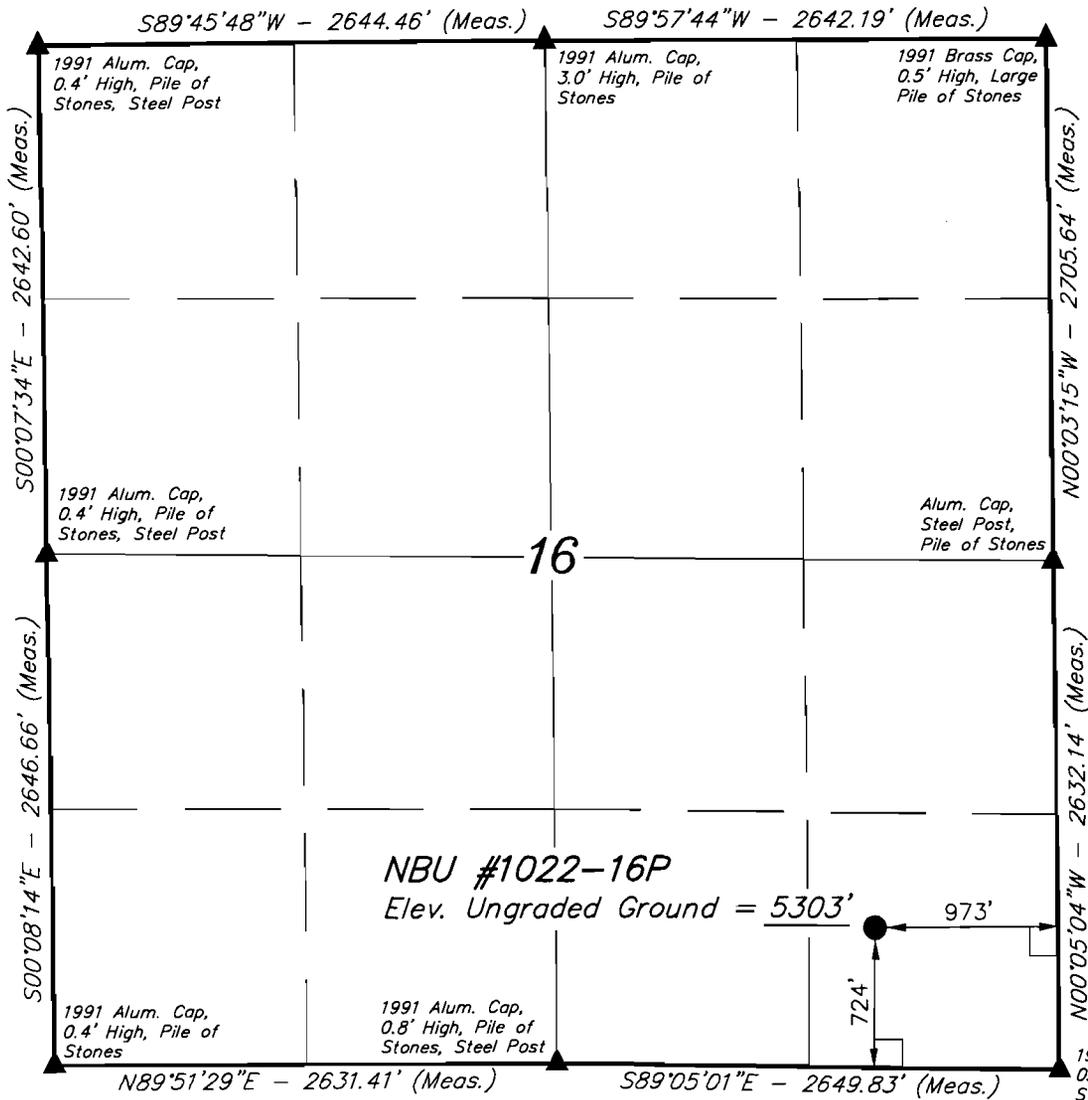


BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

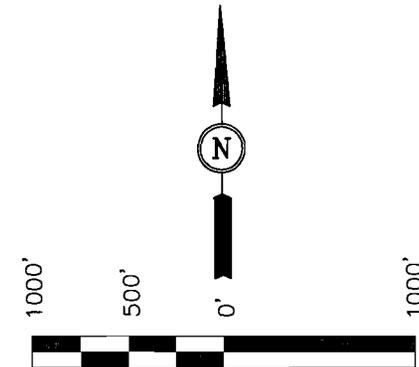

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

[Signature]
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 161319
 STATE OF UTAH

REVISED: 01-15-06

NBU #1022-16P

Elev. Ungraded Ground = 5303'

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)
 LATITUDE = 39°56'37.10" (39.943639)
 LONGITUDE = 109°26'19.68" (109.438800)
 (NAD 27)
 LATITUDE = 39°56'37.22" (39.943672)
 LONGITUDE = 109°26'17.22" (109.438117)

UINTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 12-06-05	DATE DRAWN: 12-17-05
PARTY P.J. N.F. P.M.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE Kerr-McGee Oil & Gas Onshore LP	

NBU 1022-16P
SESE SEC 16-T10S-R22E
UINTAH COUNTY, UTAH
ML-3276

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. **Estimated Tops of Important Geologic Markers:**

<u>Formation</u>	<u>Depth</u>
Uinta	0- Surface
Green River	1175'
Wasatch	4200'
Mesaverde	6650'
TD	8675'

2. **Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:**

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
	Green River	1175'
Gas	Wasatch	4200'
Gas	Mesaverde	6650'
Water	N/A	
Other Minerals	N/A	

3. **Pressure Control Equipment** (Schematic Attached)

Please refer to the attached Drilling Program.

4. **Proposed Casing & Cementing Program:**

Please refer to the attached Drilling Program.

5. **Drilling Fluids Program:**

Please refer to the attached Drilling Program.

6. **Evaluation Program:**

Please refer to the attached Drilling Program.

7. **Abnormal Conditions:**

Maximum anticipated bottomhole pressure calculated at 8675' TD, approximately equals 5378.5 psi (calculated at 0.62 psi/foot).

Maximum anticipated surface pressure equals approximately 3464.5 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. **Anticipated Starting Dates:**

Drilling is planned to commence immediately upon approval of this application.

9. **Variances:**

Please refer to the attached Drilling Program.


10. **Other Information:**

Please refer to the attached Drilling Program.



Kerr-McGee Oil & Gas Onshore LP DRILLING PROGRAM

COMPANY NAME Westport Oil and Gas Co., L.P. DATE December 28, 2005
 WELL NAME **NBU 1022-16P** TD 8,675' MD/TVD _____
 FIELD Natural Buttes COUNTY Uintah STATE Utah ELEVATION 5,303' GL KB 5,318'
 SURFACE LOCATION SESE SECTION 16-T10S-R22E 724'FSL & 973'FEL BHL Straight Hole
 Latitude: 39.943639 Longitude: 109.4388
 OBJECTIVE ZONE(S) Wasatch/Mesaverde
 ADDITIONAL INFO Regulatory Agencies: BLM (surface/minerals), UTDOGM, Tri-County Health Dept.

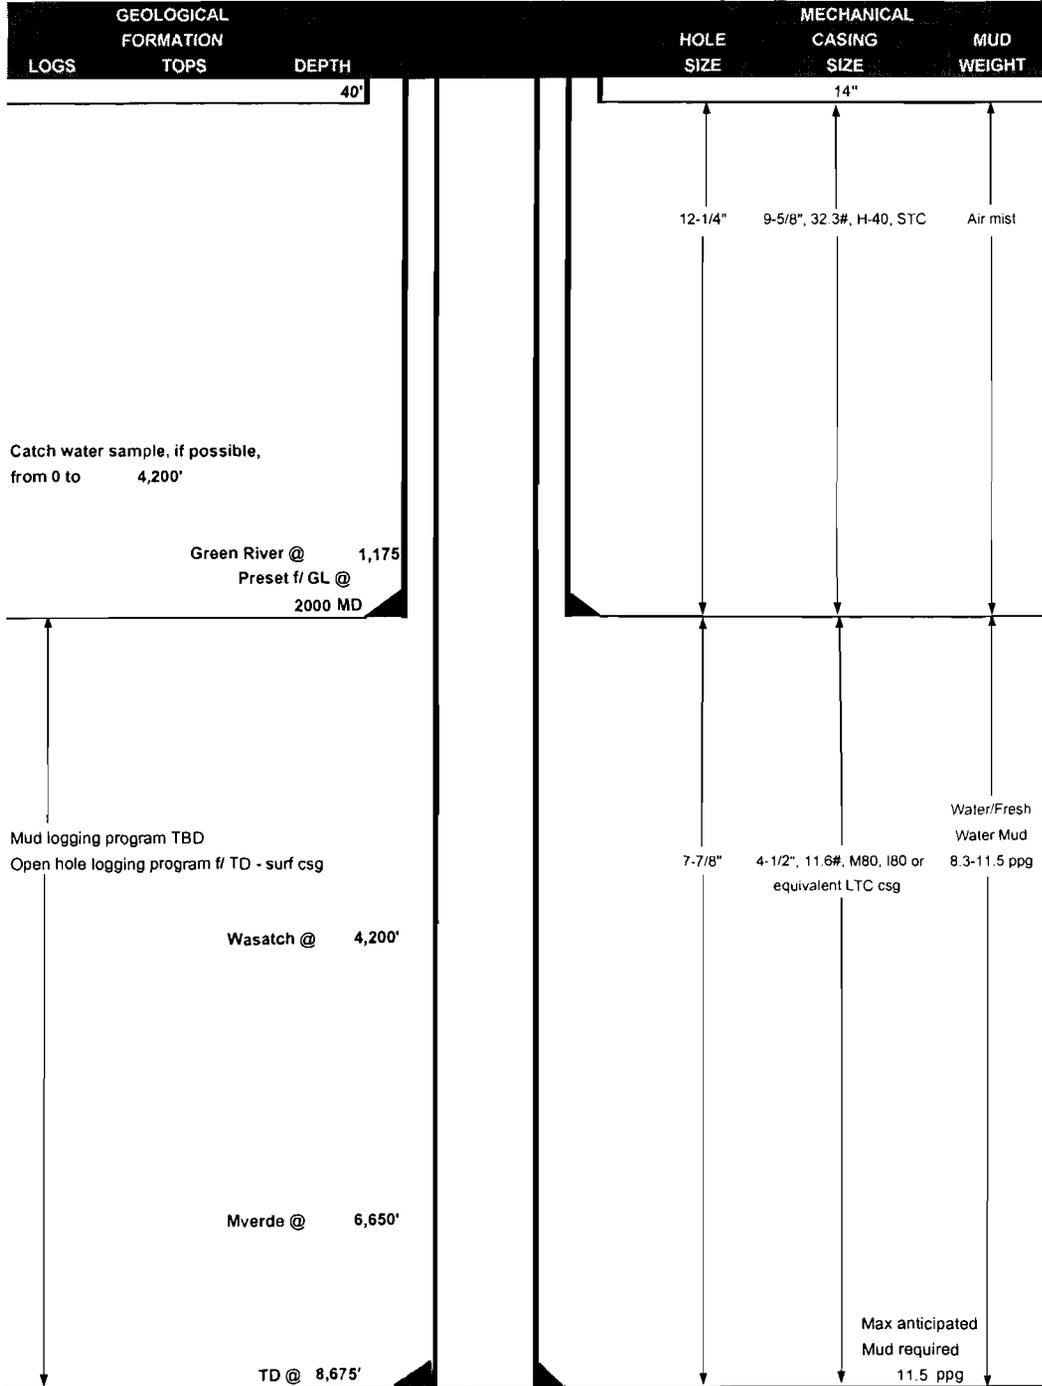



**Kerr-McGee Oil & Gas Onshore LP
DRILLING PROGRAM**

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'				2270	1370	254000
SURFACE	9-5/8"	0 to 2000	32.30	H-40	STC	0.69*****	1.58	4.49
PRODUCTION	4-1/2"	0 to 8675	11.60	M-80 or I-80	LTC	2.37	1.22	2.29

1) Max Anticipated Surf. Press. (MASP) (Surface Casing) = (Pore Pressure at next csg point - (0.22 psi/ft - partial evac gradient x TVD of next csg point))

2) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft - partial evac gradient x TD)

(Burst Assumptions: TD = 11.5 ppg)

.22 psi/ft = gradient for partially evac wellbore

(Collapse Assumption: Fully Evacuated Casing, Max MW)

(Tension Assumptions: Air Weight of Casing * Buoy. Fact. of water)

MASP 3279 psi

***** Burst SF is low but csg is much stronger than formation at 2000'. EMW @ 2000' for 2270# is 21.8 ppg or 1.13 psi/ft

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	LEAD	500	Premium cmt + 2% CaCl + .25 pps flocele	215	60%	15.60	1.18
Option 1	TOP OUT CMT (1)	200	20 gals sodium silicate + Premium cmt + 2% CaCl + .25 pps flocele	50		15.60	1.18
	TOP OUT CMT (2)	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
SURFACE		NOTE: If well will circulate water to surface, option 2 will be utilized					
Option 2	LEAD	1500	Prem cmt + 16% Gel + 10 pps gilsonite + .25 pps Flocele + 3% salt BWOC	170	35%	11.00	3.82
	TAIL	500	Premium cmt + 2% CaCl + .25 pps flocele	180	35%	15.60	1.18
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
PRODUCTION	LEAD	3,695'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	380	60%	11.00	3.38
	TAIL	4,980'	50/50 Poz/G + 10% salt + 2% gel	1390	60%	14.30	1.31

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained

*Substitute caliper hole volume plus 15% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 5M with one annular and 2 rams. Test to 5,000 psi (annular to 2,500 psi) prior to drilling out. Record on chart recorder &

tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on ng floor at all times. Kelly to be equipped with upper

& lower kelly valves.

Drop Tolco surveys every 2000'. Maximum allowable hole angle is 5 degrees.

Most rigs have PVT Systems for mud monitoring. If no PVT is available, visual monitoring will be utilized.



DRILLING ENGINEER: _____
Brad Laney

DATE: _____

DRILLING SUPERINTENDENT: _____
Randy Bayne

DATE: _____

5M BOP STACK and CHOKE MANIFOLD SYSTEM

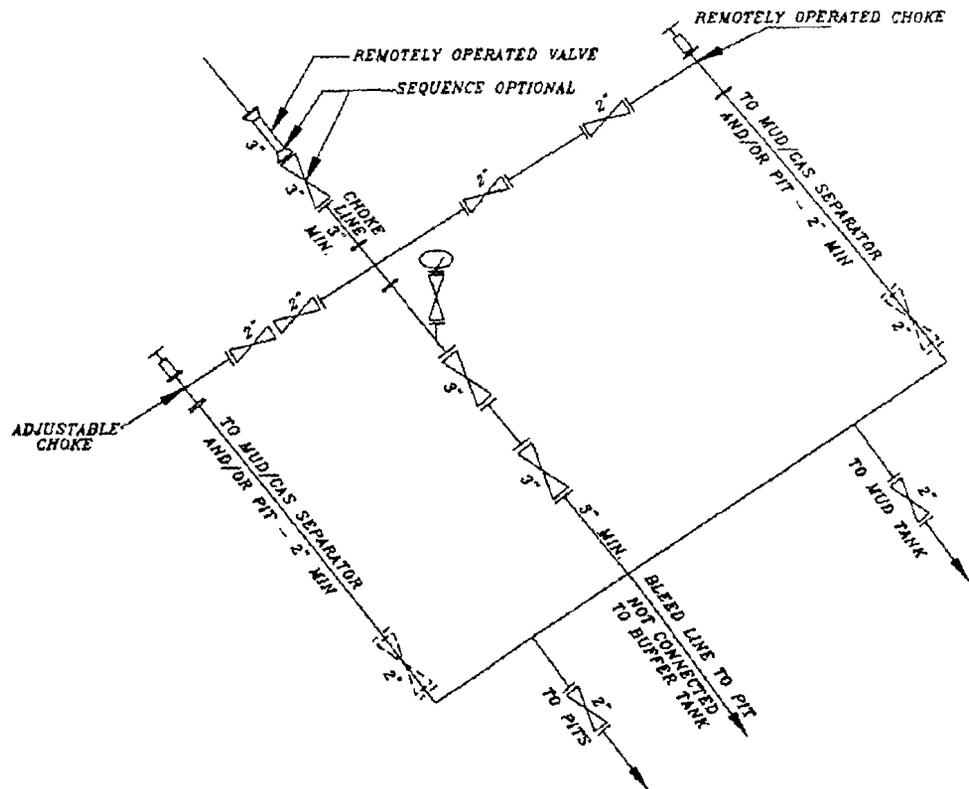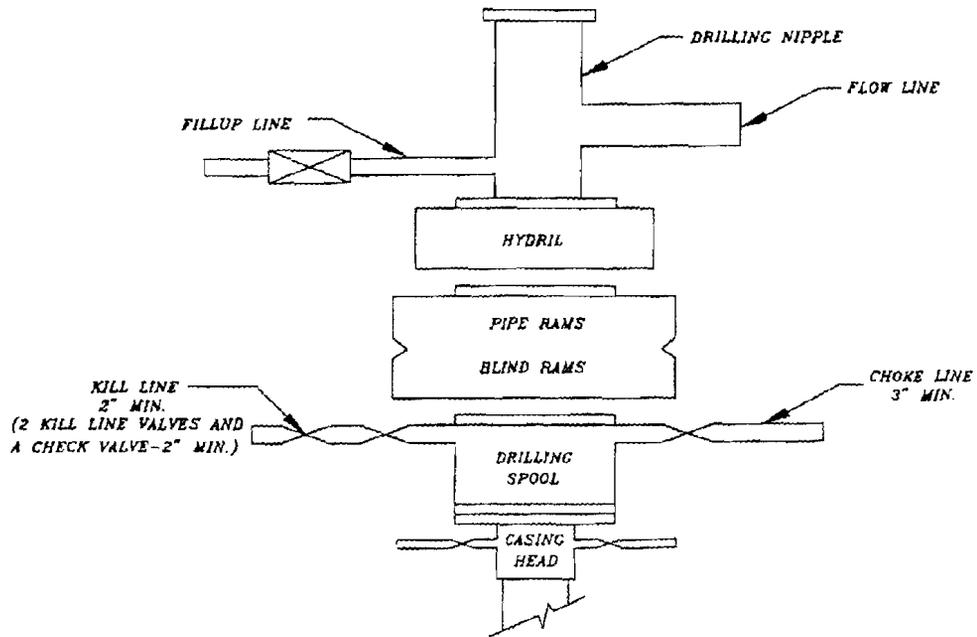

**NBU 1022-16P
SESE SEC 16-T10S-R22E
Uintah County, UT
ML-3276**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. Existing Roads:

Refer to Topo Map A for directions to the location.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

Refer to Topo Maps A and B for location of access roads within a 2 mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

2. Planned Access Roads:

Approximately 250' of new access road is proposed. Refer to Topo Map B for the location of the proposed access road.

The upgraded and new portions of the access road will be crowned and ditched with a running surface of 18 feet and a maximum disturbed width of 30 feet. Appropriate water control will be installed to control erosion.

Existence of pipelines; maximum grade; turnouts; major cut and fills, culverts, or bridges; gates, cattle guards, fence cuts, or modifications to existing facilities were determined at the on-site.

The access road was centerline flagged during time of staking.

Surfacing material may be necessary, depending upon weather conditions.

Surface disturbance and vehicular traffic will be limited to the approved location and approved access route. Any additional area needed will be approved in advance.

3. Location of Existing Wells Within a 1-Mile Radius

Please refer to Topo Map C.

4. Location of Existing & Proposed Facilities

The following guidelines will apply if the well is productive.

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain

fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The required color is Carlsbad Canyon, standard color number 2.5Y 6/2.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

Approximately 180' of pipeline is proposed. Refer to Topo D for the proposed pipeline.

5. Location and Type of Water Supply:

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec. 32, T4S, R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

6. Source of Construction Materials

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

7. Methods of Handling Waste Materials

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge of liquids.

A plastic reinforced liner and felt will be used, it will be a minimum of 20 mil thick, with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

Any produced water from the proposed well will be contained in a water tank and will then be hauled By truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec. 35, T9S, R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E.

8. Ancillary Facilities

None are anticipated.

9. Well Site Layout: (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

The reserve pit will be lined, and when the reserve pit is closed, the pit liner will be buried below plow depth.

All pits will be fenced according to the following minimum standards:

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

The net wire shall be no more than two inches above the ground. The barbed wire shall be three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Location size may change prior to the drilling of the well due to current rig availability. If the proposed location is not large enough to accommodate the drilling rig the location will be re-surveyed and a Form 9 shall be submitted.

10. Plans for Reclamation of the Surface:

Producing Location:

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

A plastic, nylon reinforced liner will be used, it shall be torn and perforated before backfilling of the reserve pit.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water (s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling, and recontouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

Dry Hole/Abandoned Location:

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations.

11. **Surface Ownership:**

SITLA
675 East 500 South, Suite 500
Salt Lake City, UT 84102

12. **Other Information:**

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance.

The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

A Class III archaeological survey has been completed and is attached.

This location is not within 460' from the boundary of the Natural Buttes Unit, nor is it Within 460' of any non-committed tract lying within the boundaries of the Unit.

13. **Lessee's or Operators's Representative & Certification:**

Debra Domenici
Associate Environmental Analyst
Kerr-McGee Oil & Gas Onshore LP
1368 South 1200 East.
Vernal, UT 84078
(435) 781-7060

Randy Bayne
Drilling Manager
Kerr-McGee Oil & Gas Onshore LP
1368 South 1200 East
Vernal, UT 84078
(435)781-7018

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Kerr-McGee Oil & Gas Onshore LP is considered to be the operator of the subject well. Kerr-McGee Oil & Gas Onshore LP agrees to be responsible under terms and conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by State Surety Bond #RLB0005236.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.


Debra Domenici

2/8/2006
Date

Kerr-McGee Oil & Gas Onshore LP
NBU #1022-16P
SECTION 16, T10S, R22E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 11.2 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 8.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY DIRECTION APPROXIMATELY 1.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN RIGHT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 1.3 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTHEAST; FOLLOW ROAD FLAGS IN A NORTHEASTERLY DIRECTION APPROXIMATELY 250' TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 54.3 MILES.

Kerr-McGee Oil & Gas Onshore LP

NBU #1022-16P

LOCATED IN UINTAH COUNTY, UTAH
SECTION 16, T10S, R22E, S.L.B.&M.

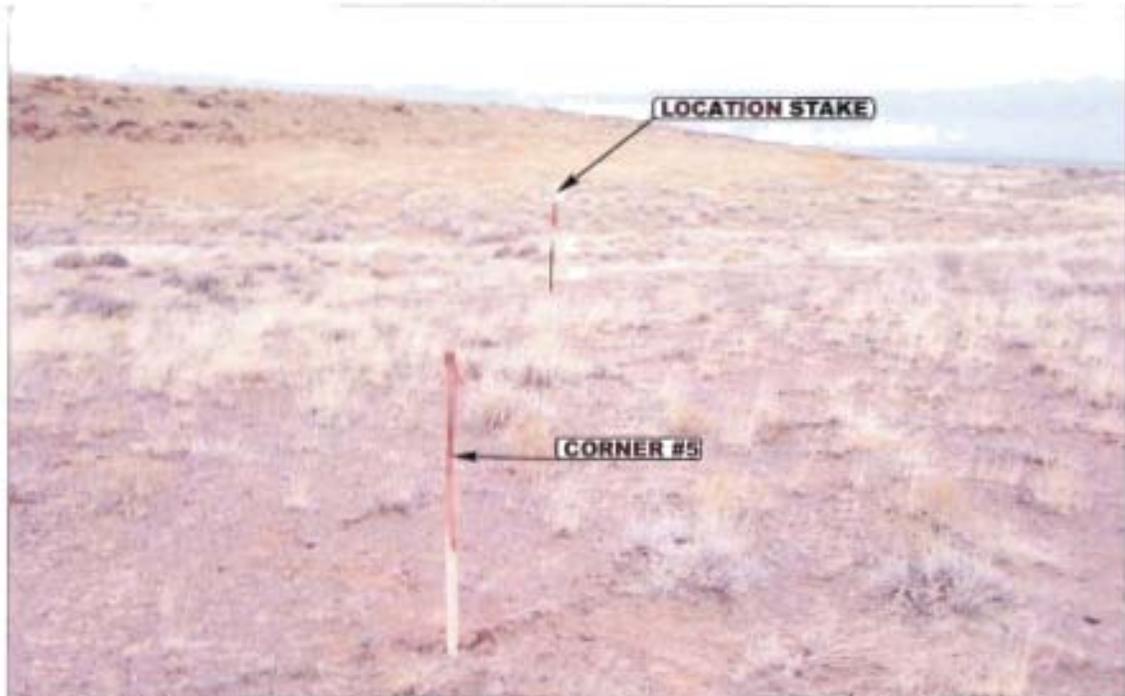


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHEASTERLY



UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

12 09 05
MONTH DAY YEAR

PHOTO

TAKEN BY: P.J.

DRAWN BY: C.P.

REVISED: 01-15-06

Kerr-McGee Oil & Gas Onshore LP

NBU #1022-16P

PIPELINE ALIGNMENT

LOCATED IN UINTAH COUNTY, UTAH

SECTION 16, T10S, R22E, S.L.B.&M.

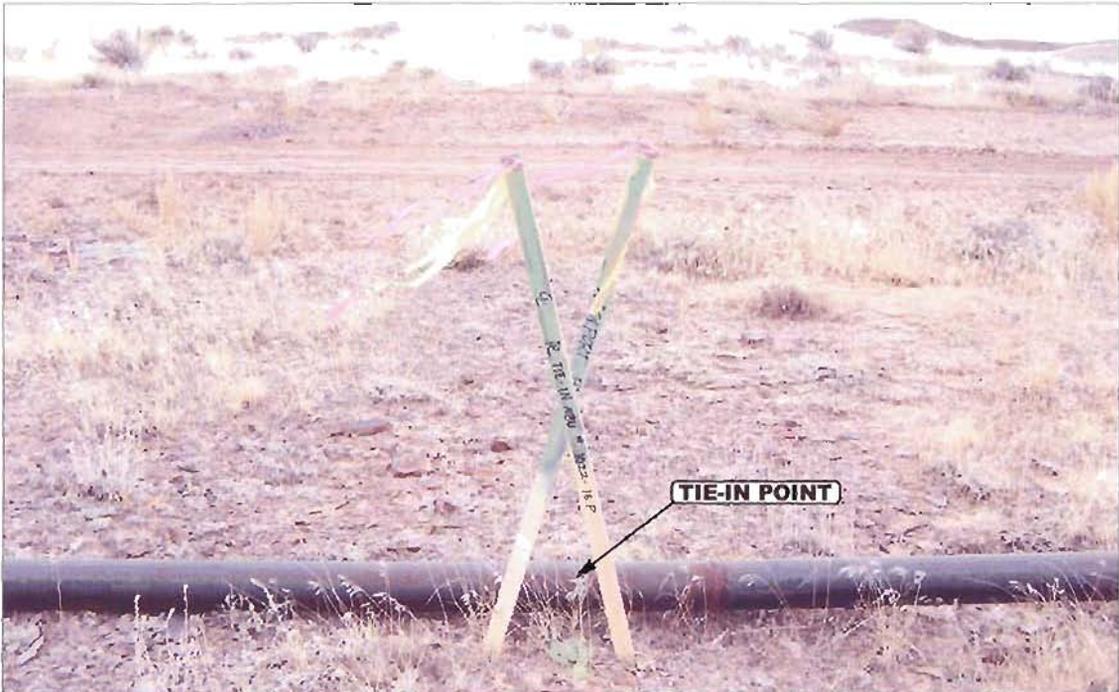


PHOTO: VIEW FROM TIE-IN POINT

CAMERA ANGLE: SOUTHERLY



PHOTO: VIEW OF PIPELINE ALIGNMENT

CAMERA ANGLE: NORTHERLY



UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

- Since 1964 -

PIPELINE PHOTOS


12 09 05
MONTH DAY YEAR

PHOTO

TAKEN BY: P.J.

DRAWN BY: C.P.

REVISED: 01-15-06

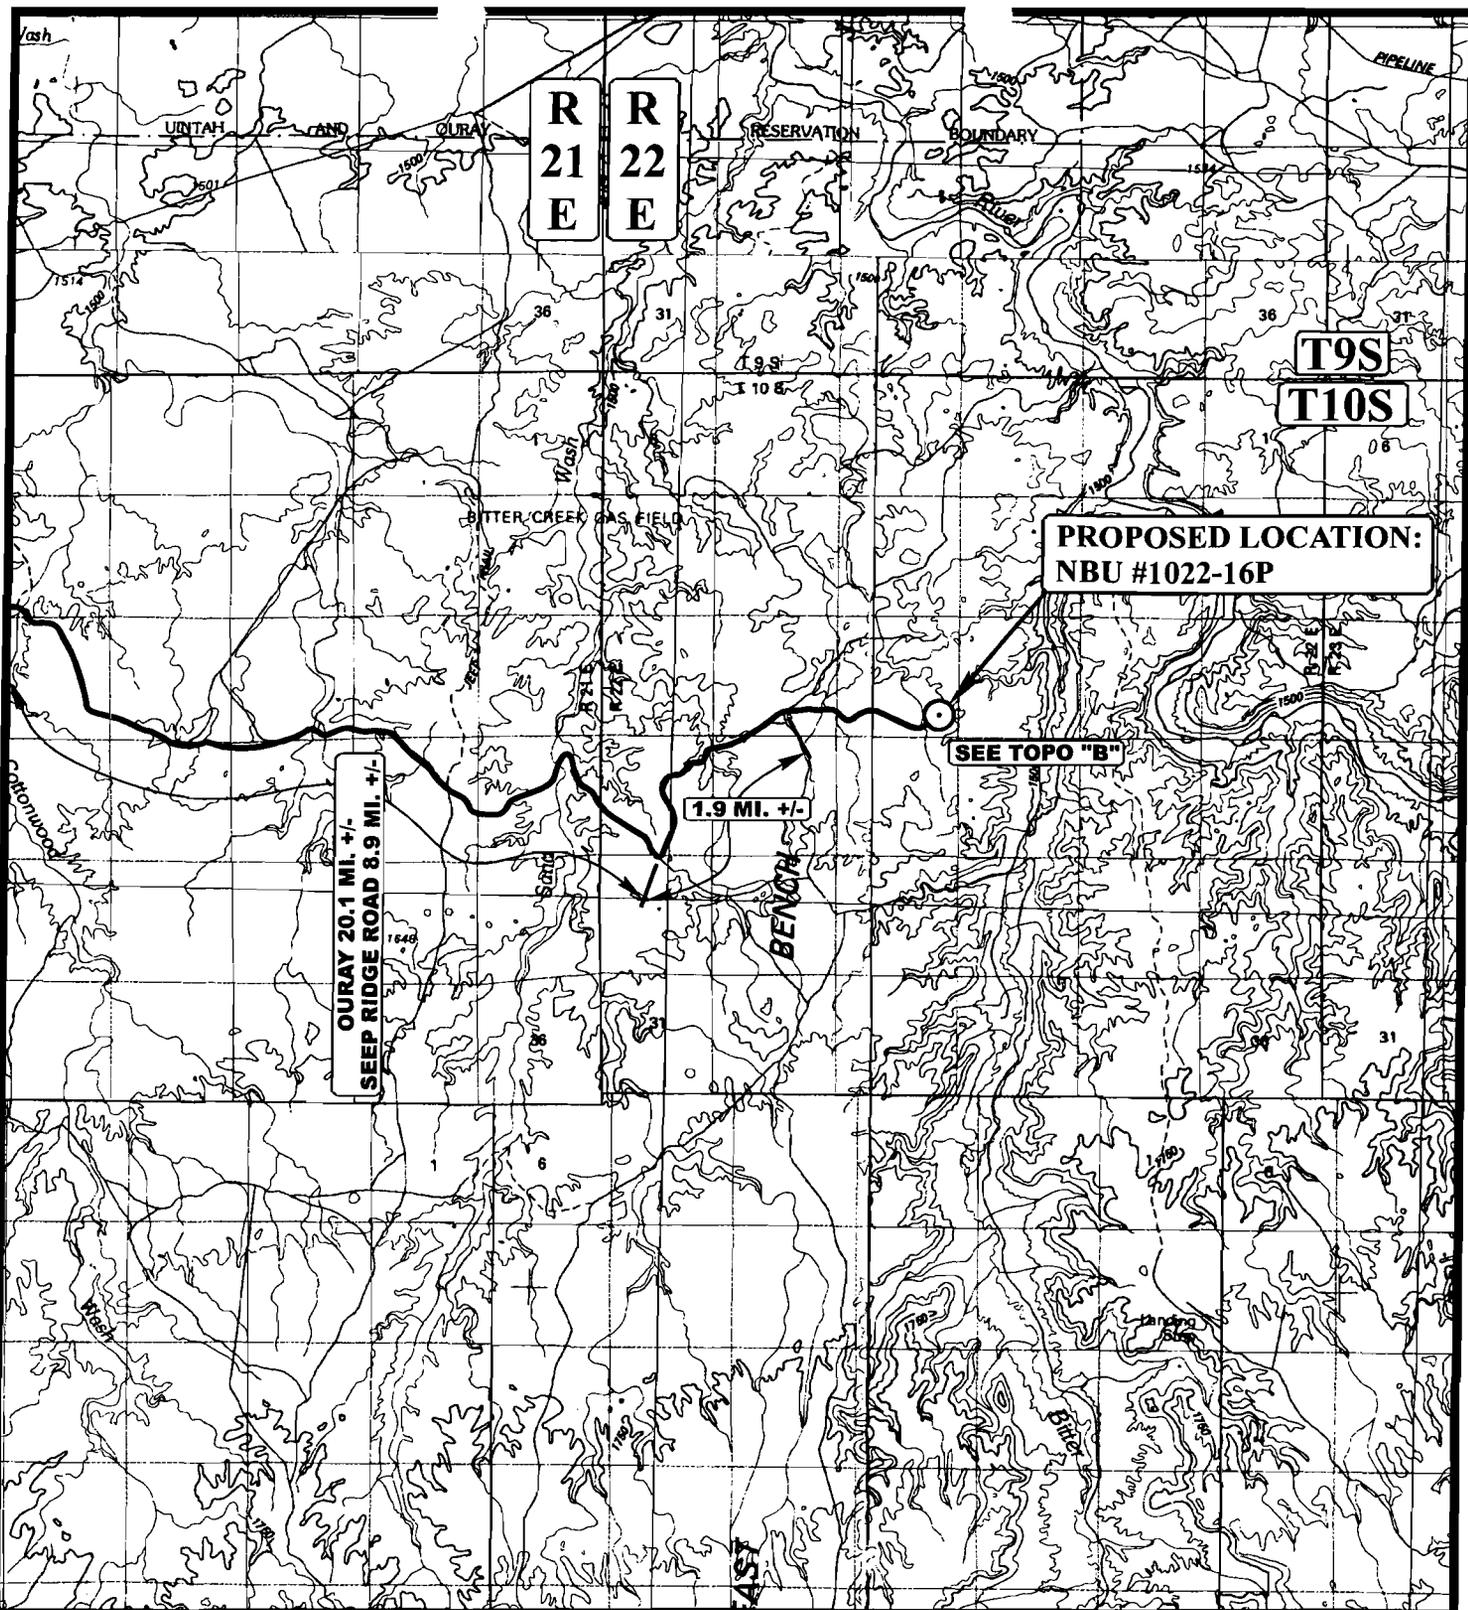

LEGEND:

⊙ PROPOSED LOCATION



Kerr-McGee Oil & Gas Onshore LP

NBU #1022-16P

SECTION 16, T10S, R22E, S.L.B.&M.

724' FSL 973' FEL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP


12 09 05
 MONTH DAY YEAR

SCALE: 1:100,000

DRAWN BY: C.P.

REVISED: 01-15-06



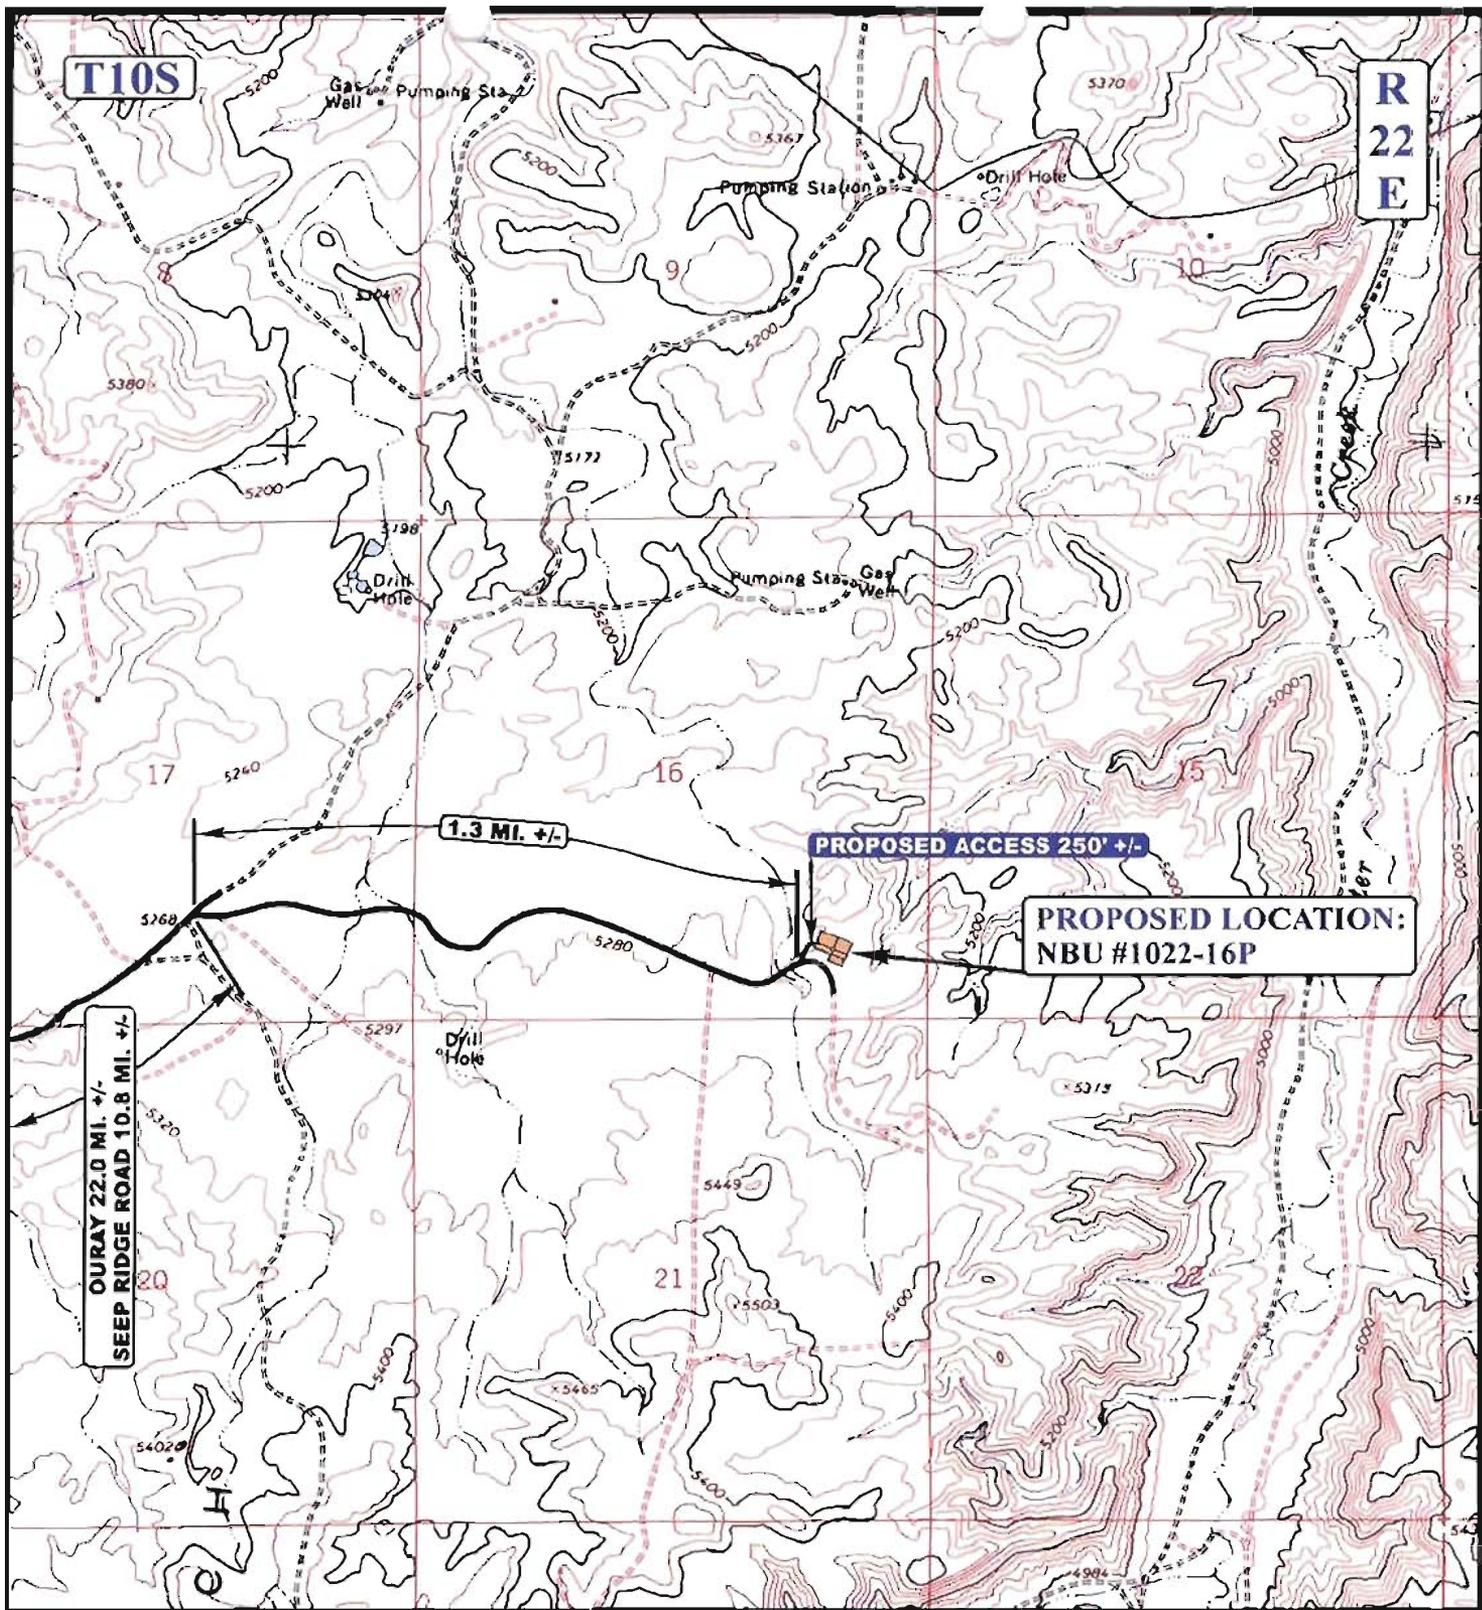

LEGEND:

- EXISTING ROAD
- - - - - PROPOSED ACCESS ROAD



Kerr-McGee Oil & Gas Onshore LP

NBU #1022-16P

SECTION 16, T10S, R22E, S.L.B.&M.

724' FSL 973' FEL




Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 ~ FAX (435) 789-1813

**TOPOGRAPHIC
 MAP**

12 09 05
 MONTH DAY YEAR



SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 01-15-06

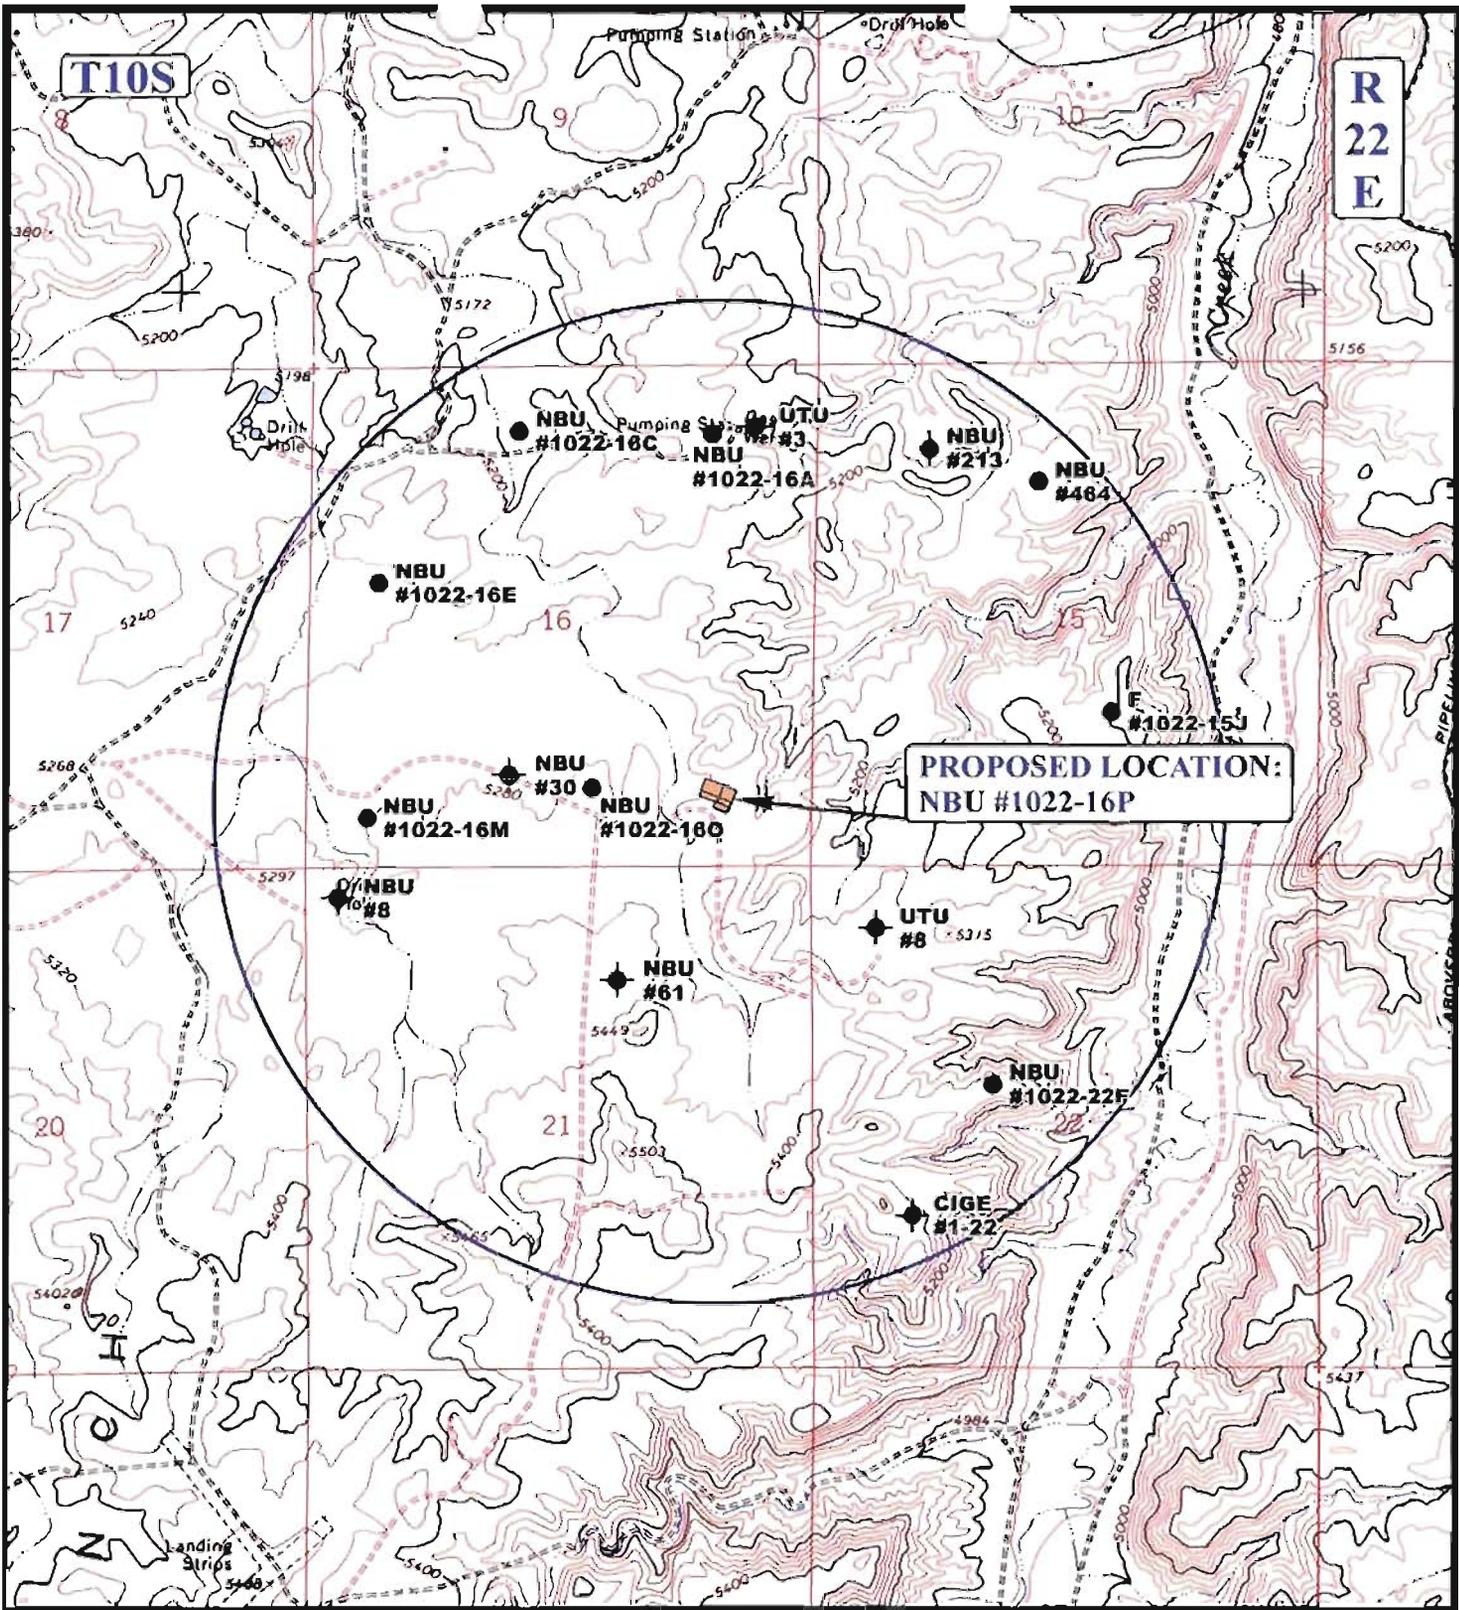

LEGEND:


- DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- WATER WELLS
- ◆ ABANDONED WELLS
- TEMPORARILY ABANDONED

Kerr-McGee Oil & Gas Onshore LP

NBU #1022-16P
 SECTION 16, T10S, R22E, S.L.B.&M.
 724' FSL 973' FEL

TOPOGRAPHIC MAP	12 09 05 MONTH DAY YEAR	C TOPO
SCALE: 1" = 2000'	DRAWN BY: C.P.	REVISED: 01-15-06

UEIS	Uintah Engineering & Land Surveying 85 South 200 East Vernal, Utah 84078 (435) 789-1017 * FAX (435) 789-1813
-------------	---

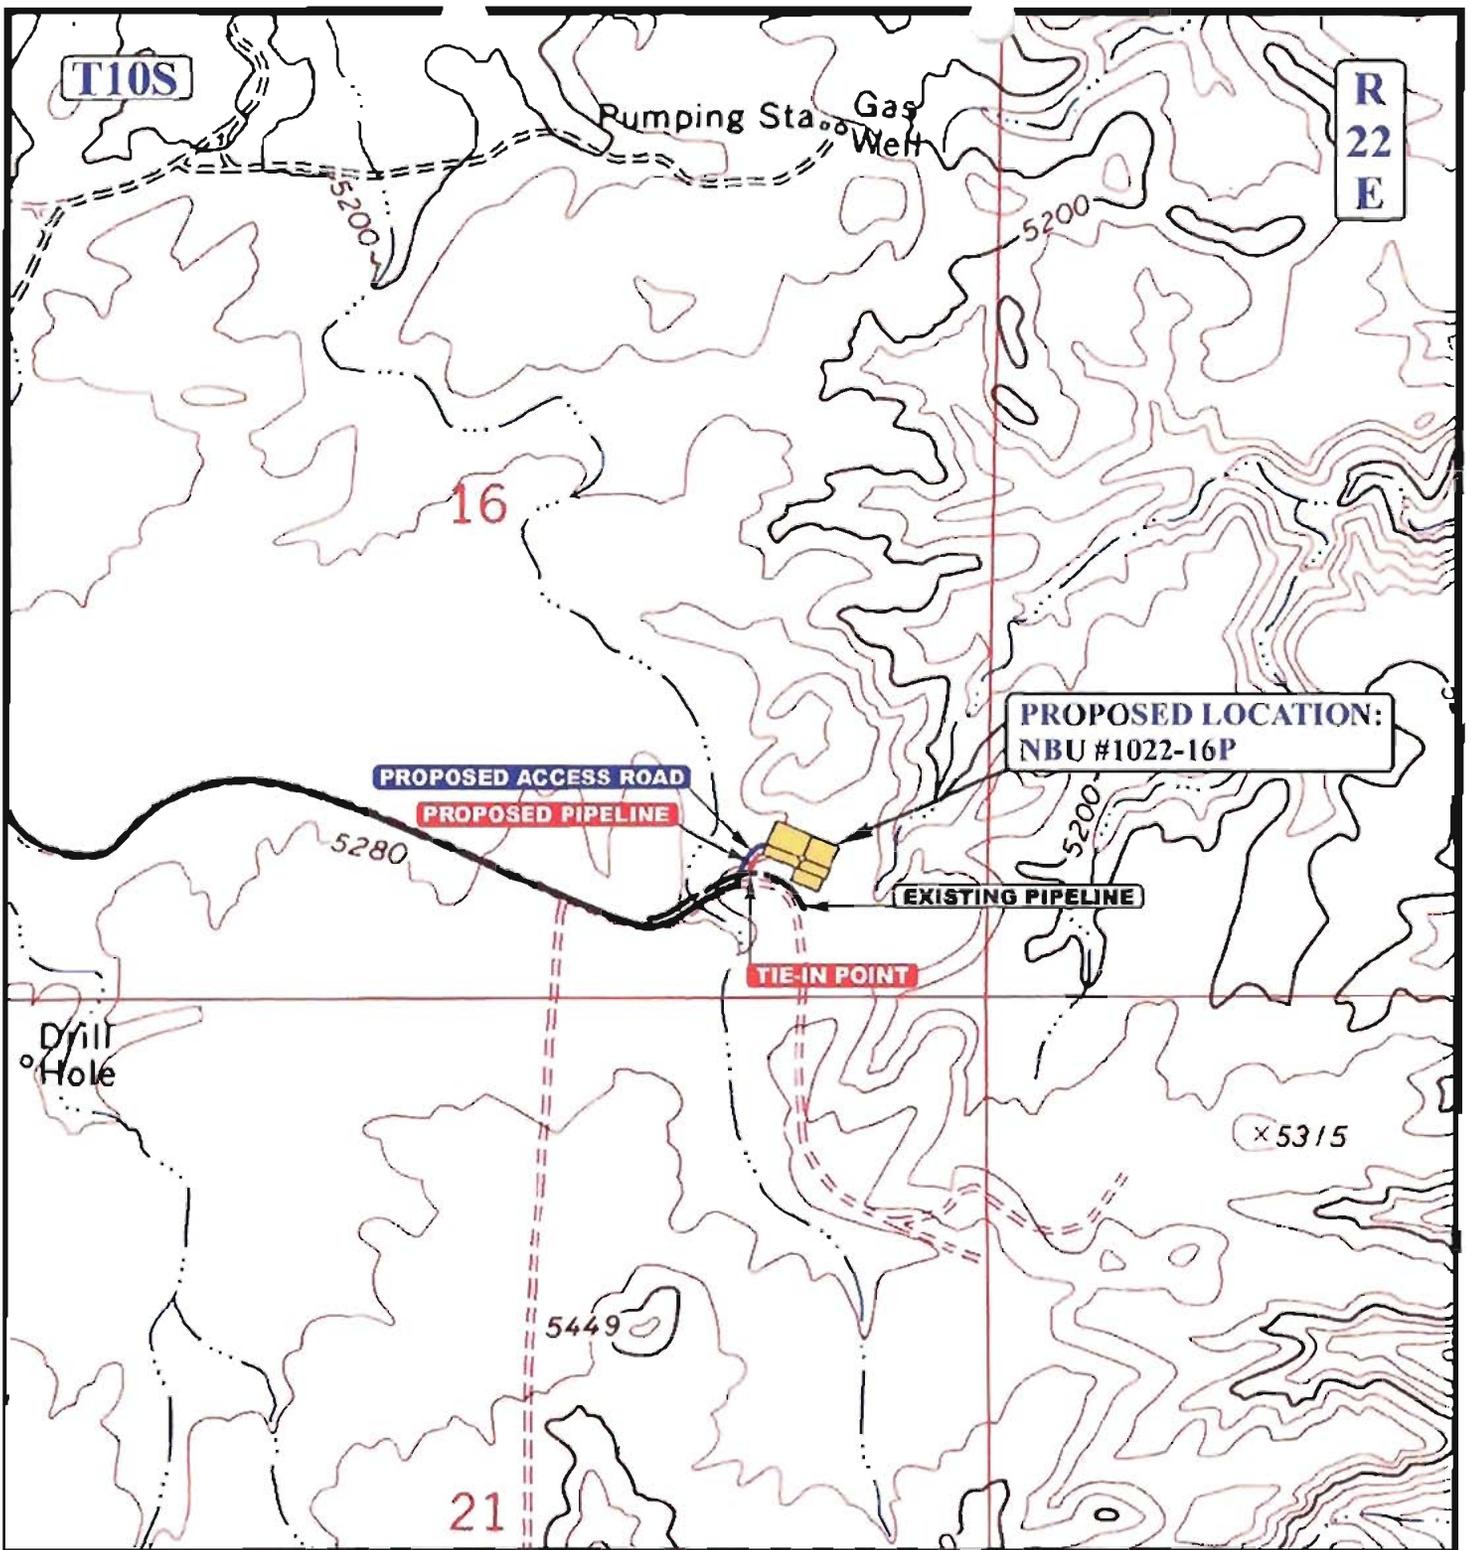

APPROXIMATE TOTAL PIPELINE DISTANCE = 180' +/-

LEGEND:

-  PROPOSED ACCESS ROAD
-  EXISTING PIPELINE
-  PROPOSED PIPELINE



Kerr-McGee Oil & Gas Onshore LP

NBU #1022-16P

SECTION 16, T10S, R22E, S.L.B.&M.

724' FSL 973' FEL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 - FAX (435) 789-1813

TOPOGRAPHIC 12 09 05
MAP MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: C.P. REVISED: 01-15-06




Kerr-McGee Oil & Gas Onshore LP

FIGURE #2

TYPICAL CROSS SECTIONS FOR
 NBU #1022-16P
 SECTION 16, T10S, R22E, S.L.B.&M.
 724' FSL 973' FEL

X-Section Scale
 1" = 20'
 1" = 50'

DATE: 12-17-05
 Drawn By: P.M.
 Revised: 01-15-06

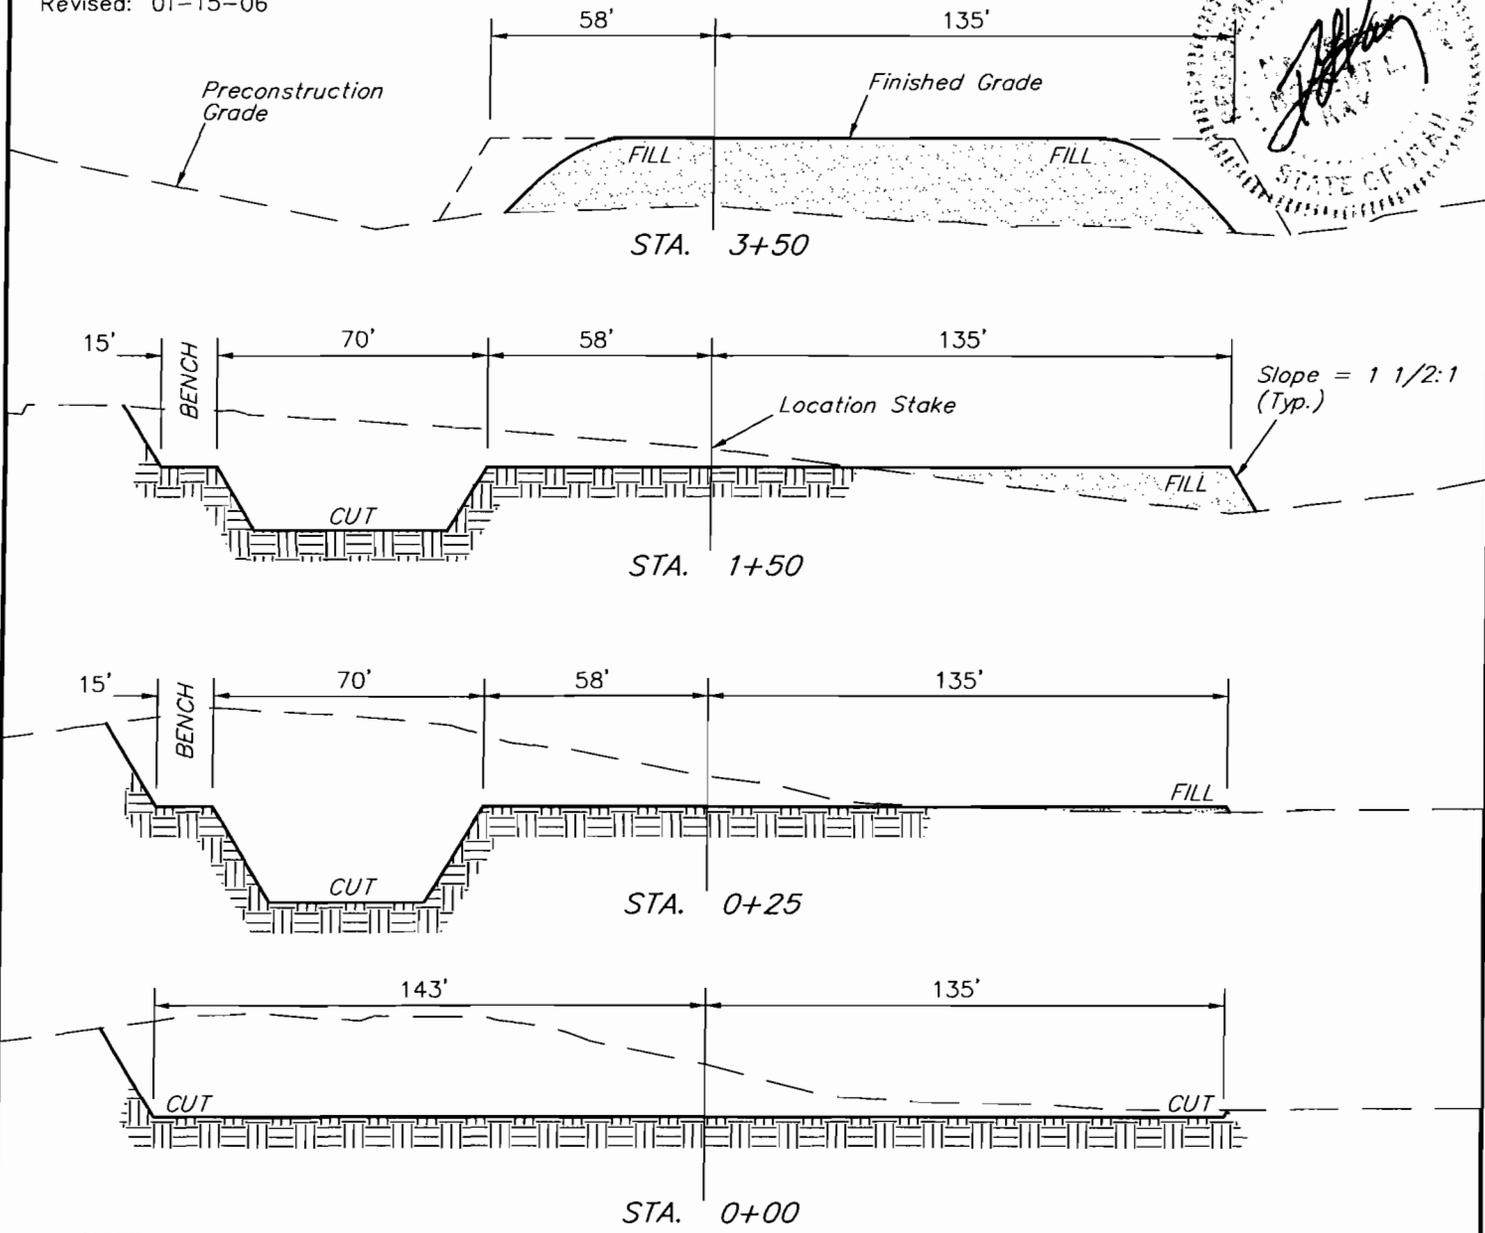

NOTE:

Topsoil should not be Stripped Below Finished Grade on Substructure Area.

*** NOTE:**

FILL QUANTITY INCLUDES 5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,840 Cu. Yds.
Remaining Location	= 9,140 Cu. Yds.
TOTAL CUT	= 10,980 CU.YDS.
FILL	= 7,750 CU.YDS.

EXCESS MATERIAL	= 3,230 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,230 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
 85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 02/14/2006

API NO. ASSIGNED: 43-047-37766

WELL NAME: NBU 1022-16P

OPERATOR: WESTPORT OIL & GAS CO (N2115)

CONTACT: DEBRA DOMENICI

PHONE NUMBER: 435-781-7060

PROPOSED LOCATION:

SESE 16 100S 220E
 SURFACE: 0724 FSL 0973 FEL
 BOTTOM: 0724 FSL 0973 FEL
 COUNTY: UINTAH
 LATITUDE: 39.94362 LONGITUDE: -109.4381
 UTM SURF EASTINGS: 633440 NORTHINGS: 4422457
 FIELD NAME: NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering	DKD	3/14/06
Geology		
Surface		

LEASE TYPE: 3 - State
 LEASE NUMBER: ML-3276
 SURFACE OWNER: 3 - State

PROPOSED FORMATION: WSMVD
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[] Ind[] Sta[] Fee[]
(No. RLB0005236)
- N Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 43-8496)
- N RDCC Review (Y/N)
(Date: _____)
- N/A Fee Surf Agreement (Y/N)
- N/A Intent to Commingle (Y/N)

LOCATION AND SITING:


- ____ R649-2-3.
- Unit: NATURAL BUTTES
- ____ R649-3-2. General
Siting: 460' From Qtr/Qtr & 920' Between Wells
- ____ R649-3-3. Exception
- Drilling Unit
Board Cause No: 173-14
Eff Date: 12-2-1999
Siting: 460' fr whrg f ncmpr. Tract
- ____ R649-3-11. Directional Drill

COMMENTS:

Needs Present (02-24-06)

STIPULATIONS:

- 1- OIL SHALE
- 2- STATEMENT OF BASIS
- 3- Surface Csg Cont Stip

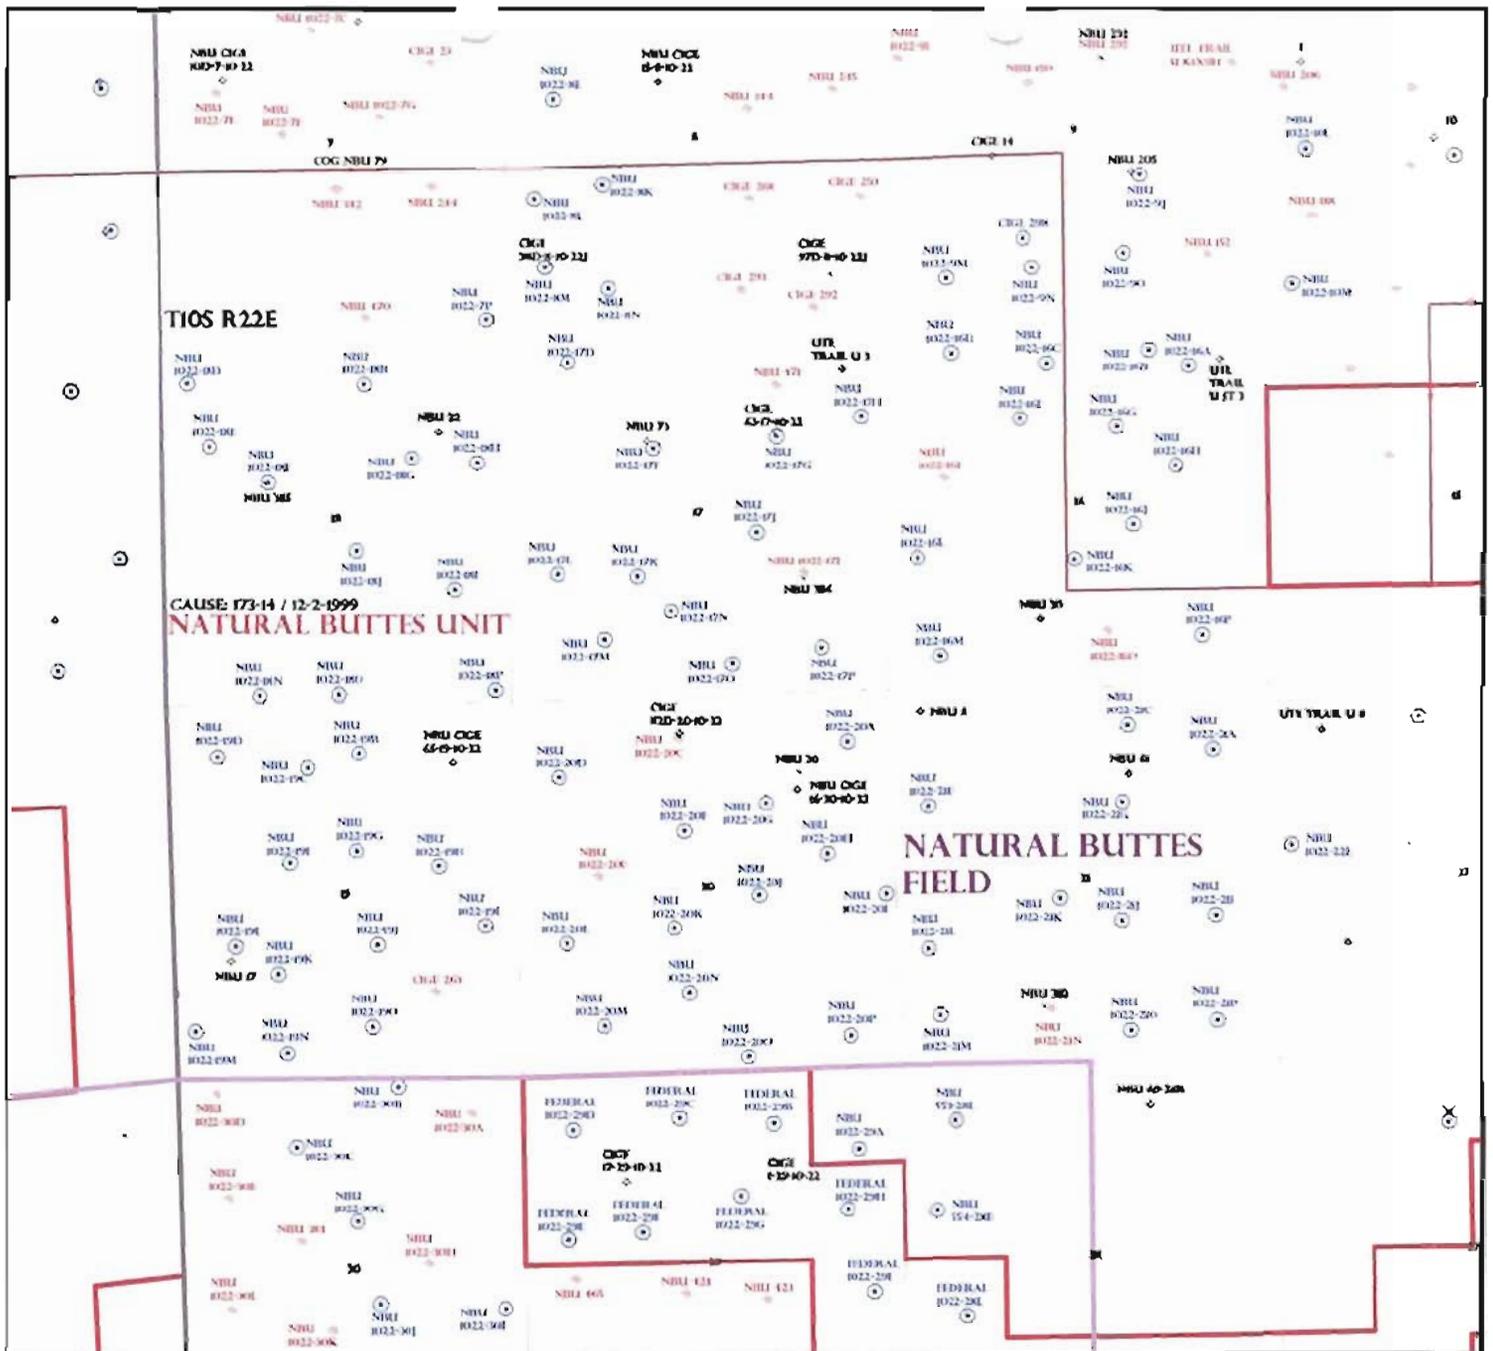

OPERATOR: WESTPORT O&G CO (N2115)

SEC: 16,18,19 T. 10S R. 22E

FIELD: NATURAL BUTTES (630)

COUNTY: UINTAH

CAUSE: 173-14 / 12-2-1999

- Field Status**
- ABANDONED
 - ACTIVE
 - COMBINED
 - INACTIVE
 - PROPOSED
 - STORAGE
 - TERMINATED

- Unit Status**
- EXPLORATORY
 - GAS STORAGE
 - NF PP OIL
 - NF SECONDARY
 - PENDING
 - PI OIL
 - PP GAS
 - PP GEOTHERML
 - PP OIL
 - SECONDARY
 - TERMINATED

- Wells Status**
- GAS INJECTION
 - GAS STORAGE
 - ✕ LOCATION ABANDONED
 - NEW LOCATION
 - PLUGGED & ABANDONED
 - PRODUCING GAS
 - PRODUCING OIL
 - SHUT-IN GAS
 - SHUT-IN OIL
 - ✕ TEMP. ABANDONED
 - TEST WELL
 - WATER INJECTION
 - WATER SUPPLY
 - WATER DISPOSAL
 - DRILLING



PREPARED BY: DIANA WHITNEY
DATE: 16-FEBRUARY-2006

**DIVISION OF OIL, GAS AND MINING
APPLICATION FOR PERMIT TO DRILL
STATEMENT OF BASIS**

OPERATOR: Westport Oil & Gas Company, L.P.
WELL NAME & NUMBER: NBU 1022-16P
API NUMBER: 43-047-37766
LOCATION: 1/4,1/4 SE/SE Sec: 16TWP: 10S RNG: 22E ; 724' FSL 973'FEL

Geology/Ground Water:

Westport proposes to set 2,000' of surface casing at this location. The depth to the base of the moderately saline water at this location is estimated to be at a depth of 5,100'. A search of Division of Water Rights records shows no water wells within a 10,000 foot radius of the center of Section 16. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be a significant source of useable ground water. The production casing cement should be brought above the base of the moderately saline groundwater to isolate it from fresher waters uphole.

Reviewer: Brad Hill **Date:** 03/06/06

Surface:

The pre-drill investigation of the surface was performed on February 24, 2006. The site is State surface and State Mineral. The proposed location poses no obvious problems for drilling a well and appears to be the best location for a well in the immediate area.

Ed Bonner and Jim Davis of SITLA and Ben Williams of UDWR were invited to attend the presite on Feb.14, 2006. Mr. Davis and Mr. Williams attended.

Mr. Williams of the UDWR stated that the area is classified as critical yearlong antelope range, however he did not recommend any stipulations, as water is the limiting factor affecting the population not forage. No other wildlife are expected to be affected. He gave Mr. Davis and Mr. Estes copies of his write-up and a DWR recommended seed mix to use on the reserve pit and when closing the location.

This predrill investigation was conducted on a cool sunny day.

Reviewer: Floyd Bartlett **Date:** 02/28/2006 \

Conditions of Approval/Application for Permit to Drill:

1. A synthetic liner with a minimum thickness of 16 mils with a felt sub-liner shall be properly installed and maintained in the reserve pit.

ON-SITE PREDRILL EVALUATION
Division of Oil, Gas and Mining

OPERATOR: Westport Oil & Gas Company, L.P.
WELL NAME & NUMBER: NBU 1022-16P
API NUMBER: 43-047-37766
LEASE: ML-3276 **FIELD/UNIT:** Natural Buttes
LOCATION: 1/4,1/4 SE/SE Sec: 16 TWP: 10S RNG: 22E ; 724' FSL 973' FEL
LEGAL WELL SITING: 460' from unit boundary and uncommitted tracts.
GPS COORD (UTM): 4422457 Y 0633440 X **SURFACE OWNER:** State of Utah (SITLA)

PARTICIPANTS

Floyd Bartlett (DOGM), Carol Estes (Westport), Clay Einerson (Westport), David Kay and Luke Kay (Uintah Engineering & Land Survey), Jim Davis (SITLA), Ben Williams (Utah Division of Wildlife Resources).

REGIONAL/SETTING TOPOGRAPHY

General area is the north East Bench area of Uintah, County. This area is approximately 36 air miles south of Vernal, Utah and approximately 23 miles southeast of Ouray, Utah. East Bench lies between Sand Wash on the west and Bitter Creek on the East. Access is by State of Utah Highway, Uintah County and oilfield development roads.

Topography is characterized by broad open flats dissected by numerous sub-drainages, which often become steep with ridges and draws with exposed sandstone layers. No perennial streams occur in the area. Individual draws or washes are ephemeral with spring runoff or flows from sometimes-intense summer rainstorms. White River is to the northeast about 4 miles. No springs exist in the area. An occasional constructed pond occurs furnishing water for antelope or livestock.

This site is on the north slope of a ridge, which slopes slightly into a gentle swale. A ridge with outcrops of bedrock occurs to the south. No drainages intersect the location nor are drainage problems expected to occur. Approximately 250 feet of new road will be constructed from an existing road.

SURFACE USE PLAN

CURRENT SURFACE USE: Sheep grazing, limited hunting and recreation.

PROPOSED SURFACE DISTURBANCE: Location of 350' x 193' and a reserve pit of 100' x 150' x 10 feet deep and an additional 15' wide bench. Approximately 250 feet of new road will be required. All material for the location and road will be obtained onsite.

LOCATION OF EXISTING WELLS WITHIN A 1 MILE RADIUS: See attached map from GIS data base.

LOCATION OF PRODUCTION FACILITIES AND PIPELINES: All production

facilities will be on location and added after drilling well. A pipeline 180 feet in length will follow access road.

SOURCE OF CONSTRUCTION MATERIAL: All construction material will be obtained from the site.

ANCILLARY FACILITIES: None will be required.

WILL DRILLING AT THIS LOCATION GENERATE PUBLIC INTEREST CONCERNS? (EXPLAIN). Unlikely, as the general use in the area is oil-field related with numerous other wells in the surrounding area.

WASTE MANAGEMENT PLAN:

Drilled cuttings will be settled into reserve pit. Liquids from pit will be allowed to evaporate. Formation water will be confined to storage tanks. Commercial contractor will handle sewage facilities, storage and disposal. Trash will be contained in trash baskets and hauled to an approved land fill.

ENVIRONMENTAL PARAMETERS

AFFECTED FLOODPLAINS AND/OR WETLANDS: None.

FLORA/FAUNA: A poor desert type vegetation cover consisting of Gardner saltbush, shadscale, big sagebrush, prickly pear and curly mesquite. Antelope, rabbits, small reptiles, birds and mammals. Sheep graze the area in the winter.

SOIL TYPE AND CHARACTERISTICS: Deep sandy loam with fractures angular surface rock.

EROSION/SEDIMENTATION/STABILITY: Little natural erosion. Sedimentation and stability are not a problem and location construction shouldn't cause an increase in stability or erosion problems. No drainages intersect the location.

PALEONTOLOGICAL POTENTIAL: Survey completed by IPC on 10/21/05 and furnished for the file.

RESERVE PIT

CHARACTERISTICS: 100' by 150' and 10' deep. The reserve pit is all within cut on the south east side of the location. A 15' wide bench is planned around the outer edges and 2' of freeboard.

LINER REQUIREMENTS (Site Ranking Form attached): Level 1 sensitivity. A 16 mil liner with a felt pad will be required for the reserve pit.

SURFACE RESTORATION/RECLAMATION PLAN

As per SITLA requirements.

SURFACE AGREEMENT:

As per SITLA requirements.

CULTURAL RESOURCES/ARCHAEOLOGY: Site was surveyed by MOAC on 10/09/05. A copy has been furnished to SITLA.

OTHER OBSERVATIONS/COMMENTS

Ben Williams of the UDWR stated that the area is classified as critical yearlong antelope range, however he did not recommend any stipulations, as water is the limiting factor affecting the population not forage. No other wildlife is expected to be affected.

This predrill investigation was conducted on a cool sunny day.

ATTACHMENTS

Photos of this site were taken and placed on file.

FLOYD BARTLETT
DOGM REPRESENTATIVE

02/24/06; 3:45 PM

DATE/TIME

**Evaluation Ranking Criteria and Ranking Score
For Reserve and Onsite Pit Liner Requirements**

<u>Site-Specific Factors</u>	<u>Ranking</u>	<u>Site Ranking</u>
Distance to Groundwater (feet)		
>200	0	
100 to 200	5	
75 to 100	10	
25 to 75	15	
<25 or recharge area	20	<u>0</u>
Distance to Surf. Water (feet)		
>1000	0	
300 to 1000	2	
200 to 300	10	
100 to 200	15	
< 100	20	
Distance to Nearest Municipal Well (feet)		
>5280	0	
1320 to 5280	5	
500 to 1320	10	
<500	20	<u>0</u>
Distance to Other Wells (feet)		
>1320	0	
300 to 1320	10	
<300	20	<u>10</u>
Native Soil Type		
Low permeability	0	
Mod. permeability	10	
High permeability	20	<u>10</u>
Fluid Type		
Air/mist	0	
Fresh Water	5	
TDS >5000 and <10000	10	
TDS >10000 or Oil Base Mud Fluid	15	
containing significant levels of hazardous constituents	20	<u>5</u>
Drill Cuttings		
Normal Rock	0	
Salt or detrimental	10	<u>0</u>
Annual Precipitation (inches)		
<10	0	
10 to 20	5	
>20	10	<u>0</u>
Affected Populations		
<10	0	
10 to 30	6	
30 to 50	8	
>50	10	<u>0</u>
Presence of Nearby Utility Conduits		
Not Present	0	
Unknown	10	
Present	15	<u>0</u>


Final Score 25 (Level I Sensitivity)

Sensitivity Level I = 20 or more; total containment is required.

Sensitivity Level I = 15-19; lining is discretionary.

Sensitivity Level II = below 15; no specific lining is required.

Casing Schematic

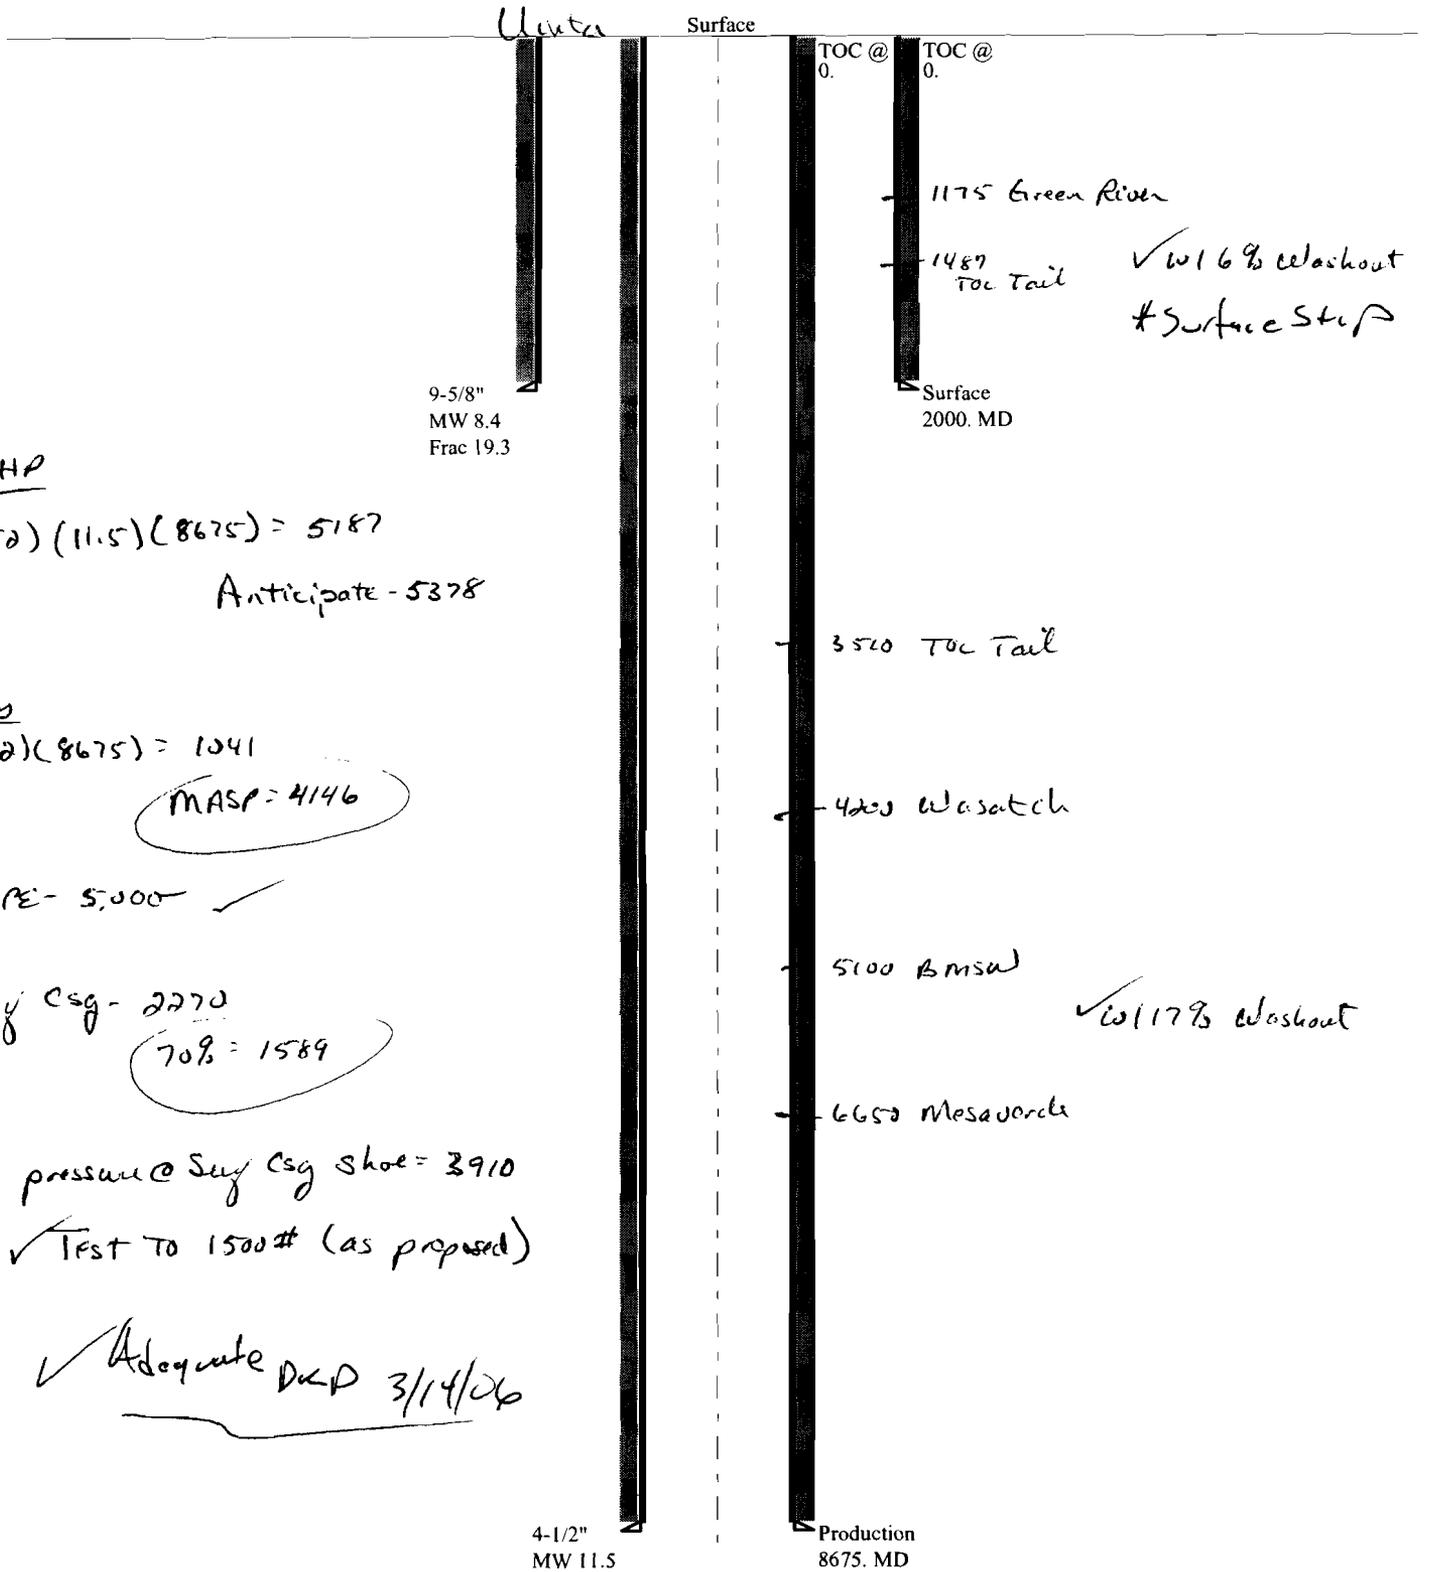

BHP

$(0.52)(11.5)(8675) = 5187$

Anticipate - 5378

Gas

$(.12)(8675) = 1041$

MASP = 4146

BORE - 5,000 ✓

Say csg - 2270

70% = 1589

Max pressure @ Say csg shoe = 3910

✓ Test to 1500# (as proposed)

✓ Adequate D&D 3/14/06

Well name:	03-06 Westport NBU 1022-16P	
Operator:	Westport Oil & Gas	Project ID:
String type:	Surface	43-047-37766
Location:	Uintah County, Utah	

Design parameters:

Collapse

Mud weight: 8.400 ppg
 Design is based on evacuated pipe.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Environment:

H2S considered? No
 Surface temperature: 75 °F
 Bottom hole temperature: 103 °F
 Temperature gradient: 1.40 °F/100ft
 Minimum section length: 1,500 ft

Cement top: Surface

Burst

Max anticipated surface pressure: 1,760 psi
 Internal gradient: 0.120 psi/ft
 Calculated BHP 2,000 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)
 8 Round LTC: 1.80 (J)
 Buttress: 1.60 (J)
 Premium: 1.50 (J)
 Body yield: 1.50 (B)

Non-directional string.

Tension is based on buoyed weight.
 Neutral point: 1,753 ft

Re subsequent strings:

Next setting depth: 8,675 ft
 Next mud weight: 11.500 ppg
 Next setting BHP: 5,182 psi
 Fracture mud wt: 19.250 ppg
 Fracture depth: 2,000 ft
 Injection pressure 2,000 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	2000	9.625	32.30	H-40	ST&C	2000	2000	8.876	126.8
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	873	1370	1.570	2000	2270	1.14	57	254	4.49 J

Prepared by: Clinton Dworshak
 Utah Div. of Oil & Mining

Phone: (810) 538-5280
 FAX: (801) 359-3940

Date: March 7, 2006
 Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 2000 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:	03-06 Westport NBU 1022-16P	
Operator:	Westport Oil & Gas	Project ID:
String type:	Production	43-047-37766
Location:	Uintah County, Utah	

Design parameters:

Collapse

Mud weight: 11.500 ppg
Design is based on evacuated pipe.

Burst

Max anticipated surface pressure: 4,141 psi
Internal gradient: 0.120 psi/ft
Calculated BHP: 5,182 psi

No backup mud specified.

Minimum design factors:

Collapse:

Design factor: 1.125

Burst:

Design factor: 1.00

Tension:

8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)

Tension is based on buoyed weight.
Neutral point: 7,184 ft

Environment:

H2S considered? No
Surface temperature: 75 °F
Bottom hole temperature: 196 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 1,500 ft

Cement top: Surface

Non-directional string.

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	8675	4.5	11.60	M-80	LT&C	8675	8675	3.875	201.1
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	5182	6350	1.225	5182	7780	1.50	83	267	3.20 B

Prepared by: Clinton Dworshak
Utah Div. of Oil & Mining

Phone: (810) 538-5280
FAX: (801) 359-3940

Date: March 7, 2006
Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 8675 ft, a mud weight of 11.5 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

From: Ed Bonner
To: Whitney, Diana
Date: 2/22/2006 4:16:52 PM
Subject: Well Clearance

The following wells have been given cultural resource clearance by the Trust Lands Cultural Resources Group:

Newfield Production Company

- Gilsonite State G-32-8-17
- Gilsonite State H-32-8-17
- Gilsonite State M-32-8-17
- Gilsonite State N-32-8-17
- Gilsonite State Q-32-8-17
- Castle Draw State G-2-9-17
- Monument Butte State I-36-8-16
- Monument Butte State L-36-8-16
- Monument Butte State S-36-8-16

Westport Oil & Gas Company

- NBU 1022-16J
- NBU 1022-16L
- NBU 1022-16P
- NBU 1022-18B
- NBU 1022-18D
- NBU 1022-18E
- NBU 1022-18G
- NBU 1022-18H
- NBU 1022-18I
- NBU 1022-18J
- NBU 1022-18N
- NBU 1022-18O
- NBU 1022-18P

If you have any questions regarding this matter please give me a call.

CC: Davis, Jim; Garrison, LaVonne; Hill, Brad; Hunt, Gil

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:
3160
(UT-922)

March 2, 2006

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2006 Plan of Development Natural Buttes Unit Uintah
County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2006 within the Natural Buttes Unit, Uintah County, Utah.

API #	WELL NAME	LOCATION
(Proposed PZ Wasatch-MesaVerde)		
43-047-37738	NBU 1022-19F	Sec 19 T10S R22E 2239 FNL 1622 FWL
43-047-37739	NBU 1022-19D	Sec 19 T10S R22E 0732 FNL 0640 FWL
43-047-37740	NBU 1022-19C	Sec 19 T10S R22E 0896 FNL 1891 FWL
43-047-37765	NBU 1022-16J	Sec 16 T10S R22E 2302 FSL 1901 FEL
43-047-37766	NBU 1022-16P	Sec 16 T10S R22E 0724 FSL 0973 FEL
43-047-37767	NBU 1022-16L	Sec 16 T10S R22E 1904 FSL 0343 FWL
43-047-37768	NBU 1022-18H	Sec 18 T10S R22E 1947 FNL 0465 FEL
43-047-37769	NBU 1022-18G	Sec 18 T10S R22E 1870 FNL 1383 FEL
43-047-37770	NBU 1022-18I	Sec 18 T10S R22E 1592 FSL 0803 FEL
43-047-37771	NBU 1022-18E	Sec 18 T10S R22E 1656 FNL 0606 FWL
43-047-37772	NBU 1022-18J	Sec 18 T10S R22E 2158 FSL 2171 FEL
43-047-37773	NBU 1022-18N	Sec 18 T10S R22E 0125 FSL 1249 FWL
43-047-37774	NBU 1022-18B	Sec 18 T10S R22E 0818 FNL 2040 FEL
43-047-37775	NBU 1022-18P	Sec 18 T10S R22E 0169 FSL 0249 FEL
43-047-37776	NBU 1022-18D	Sec 18 T10S R22E 0765 FNL 0311 FWL
43-047-37777	NBU 1022-18O	Sec 18 T10S R22E 0134 FSL 2445 FEL
43-047-37783	NBU 1022-19K	Sec 19 T10S R22E 1509 FSL 1427 FWL
43-047-37778	NBU 1022-19H	Sec 19 T10S R22E 2298 FNL 1086 FEL
43-047-37779	NBU 1022-19B	Sec 19 T10S R22E 0696 FNL 2180 FEL
43-047-37780	NBU 1022-19G	Sec 19 T10S R22E 2069 FNL 2241 FEL
43-047-37781	NBU 1022-19I	Sec 19 T10S R22E 2135 FSL 0460 FEL
43-047-37782	NBU 1022-19O	Sec 19 T10S R22E 0740 FSL 2065 FEL
43-047-37734	NBU 1021-27E	Sec 27 T10S R21E 1862 FNL 0535 FWL
43-047-37728	NBU 1021-28G	Sec 28 T10S R21E 1952 FNL 1971 FEL
43-047-37721	NBU 1021-13C	Sec 13 T10S R21E 0576 FNL 1772 FWL
43-047-37722	NBU 1021-13A	Sec 13 T10S R21E 0651 FNL 1311 FEL

Page 2

43-047-37723	NBU 1021-13G	Sec 13	T10S	R21E	1444	FNL	2651	FEL
43-047-37724	NBU 1021-13K	Sec 13	T10S	R21E	1935	FSL	1486	FWL
43-047-37725	NBU 1021-13I	Sec 13	T10S	R21E	2353	FSL	0668	FEL
43-047-37727	NBU 1021-13O	Sec 13	T10S	R21E	0777	FSL	1573	FEL
43-047-37761	NBU 920-20P	Sec 20	T09S	R20E	0769	FSL	0978	FEL
43-047-37760	NBU 920-20O	Sec 20	T09S	R20E	0842	FSL	1913	FEL
43-047-37759	NBU 920-20N	Sec 20	T09S	R20E	0803	FSL	1885	FWL
43-047-37758	NBU 920-20M	Sec 20	T09S	R20E	0630	FSL	0838	FWL
43-047-37757	NBU 920-20L	Sec 20	T09S	R20E	2104	FSL	0827	FWL
43-047-37756	NBU 920-20J	Sec 20	T09S	R20E	1466	FSL	1653	FEL
43-047-37755	NBU 920-20I	Sec 20	T09S	R20E	1955	FSL	0717	FEL
43-047-37732	NBU 920-22E	Sec 22	T09S	R20E	2009	FNL	0756	FWL
43-047-37764	NBU 920-24M	Sec 24	T09S	R20E	0614	FSL	0851	FWL
43-047-37753	NBU 920-14M	Sec 14	T09S	R20E	0536	FSL	0612	FWL
43-047-37754	NBU 920-14N	Sec 14	T09S	R20E	0732	FSL	1805	FWL

This office has no objection to permitting the wells at this time.

/s/ Michael L. Coulthard

bcc: File – Natural Buttes Unit
Division of Oil Gas and Mining
Central Files



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

March 15, 2006

Westport Oil & Gas Company, LP
1368 S 1200 E
Vernal, UT 84078

Re: Natural Buttes Unit 1022-16P Well, 724' FSL, 973' FEL, SE SE, Sec. 16,
T. 10 South, R. 22 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-37766.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
SITLA
Bureau of Land Management, Vernal District Office

Operator: Westport Oil & Gas Company, LP
Well Name & Number Natural Buttes Unit 1022-16P
API Number: 43-047-37766
Lease: ML-3276

Location: SE SE **Sec.** 16 **T.** 10 South **R.** 22 East

Conditions of Approval

1. **General**

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. **Notification Requirements**

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- 24 hours prior to cementing or testing casing
- 24 hours prior to testing blowout prevention equipment
- 24 hours prior to spudding the well
- within 24 hours of any emergency changes made to the approved drilling program
- prior to commencing operations to plug and abandon the well

The following are Division of Oil, Gas and Mining contacts and their work telephone numbers (please leave a voice mail message if the person is not available to take the call):

- Dan Jarvis at (801) 538-5338
- Carol Daniels at (801) 538-5284 (spud)

3. **Reporting Requirements**

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. Compliance with the State of Utah Antiquities Act forbids disturbance of archeological, historical, or paleontological remains. Should archeological, historical or paleontological remains be encountered during your operations, you are required to immediately suspend all operations and immediately inform the Trust Lands Administration and the Division of State History of the discovery of such remains.

5. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)

6. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.
7. Surface casing shall be cemented to the surface.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-3276
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES UNIT
2. NAME OF OPERATOR: WESTPORT OIL & GAS COMPANY L.P.		8. WELL NAME and NUMBER: NBU 1022-16P
3. ADDRESS OF OPERATOR: 1368 S. 1200 E. CITY VERNAL STATE UT ZIP 84078		9. API NUMBER: 4304737766
4. LOCATION OF WELL FOOTAGES AT SURFACE: 724'FSL, 973'FEL		10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 16 10S 22E		COUNTY: UINTAH
		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>PIPELINE CHANGE</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

THE OPERATOR REQUESTS AUTHORIZATION TO AMEND THE PIPELINE ROUTE PROPOSED IN THE APD. THE OPERATOR PROPOSES TO RUN APPROXIMATELY 1300' +/- OF 4" HIGH PRESSURE PIPELINE AND APPROXIMATELY 180' +/- OF LOW PRESSURE PIPELINE FROM THE PROPOSED LOCATION TO THE TIE-IN POINT OF THE JUNCTION TO THE EXISTING PIPELINE.


PLEASE REFER TO THE ATTACHED CHRONOLOGICAL WELL HISTORY.

NAME (PLEASE PRINT) <u>SHEILA UPCHEGO</u>	TITLE <u>REGULATORY ANALYST</u>
SIGNATURE	DATE <u>4/5/2006</u>

(This space for State use only)

**Accepted by the
Utah Division of
Oil, Gas and Mining
For Record Only**

RECEIVED
APR 12 2006
DIV. OF OIL, GAS & MINING

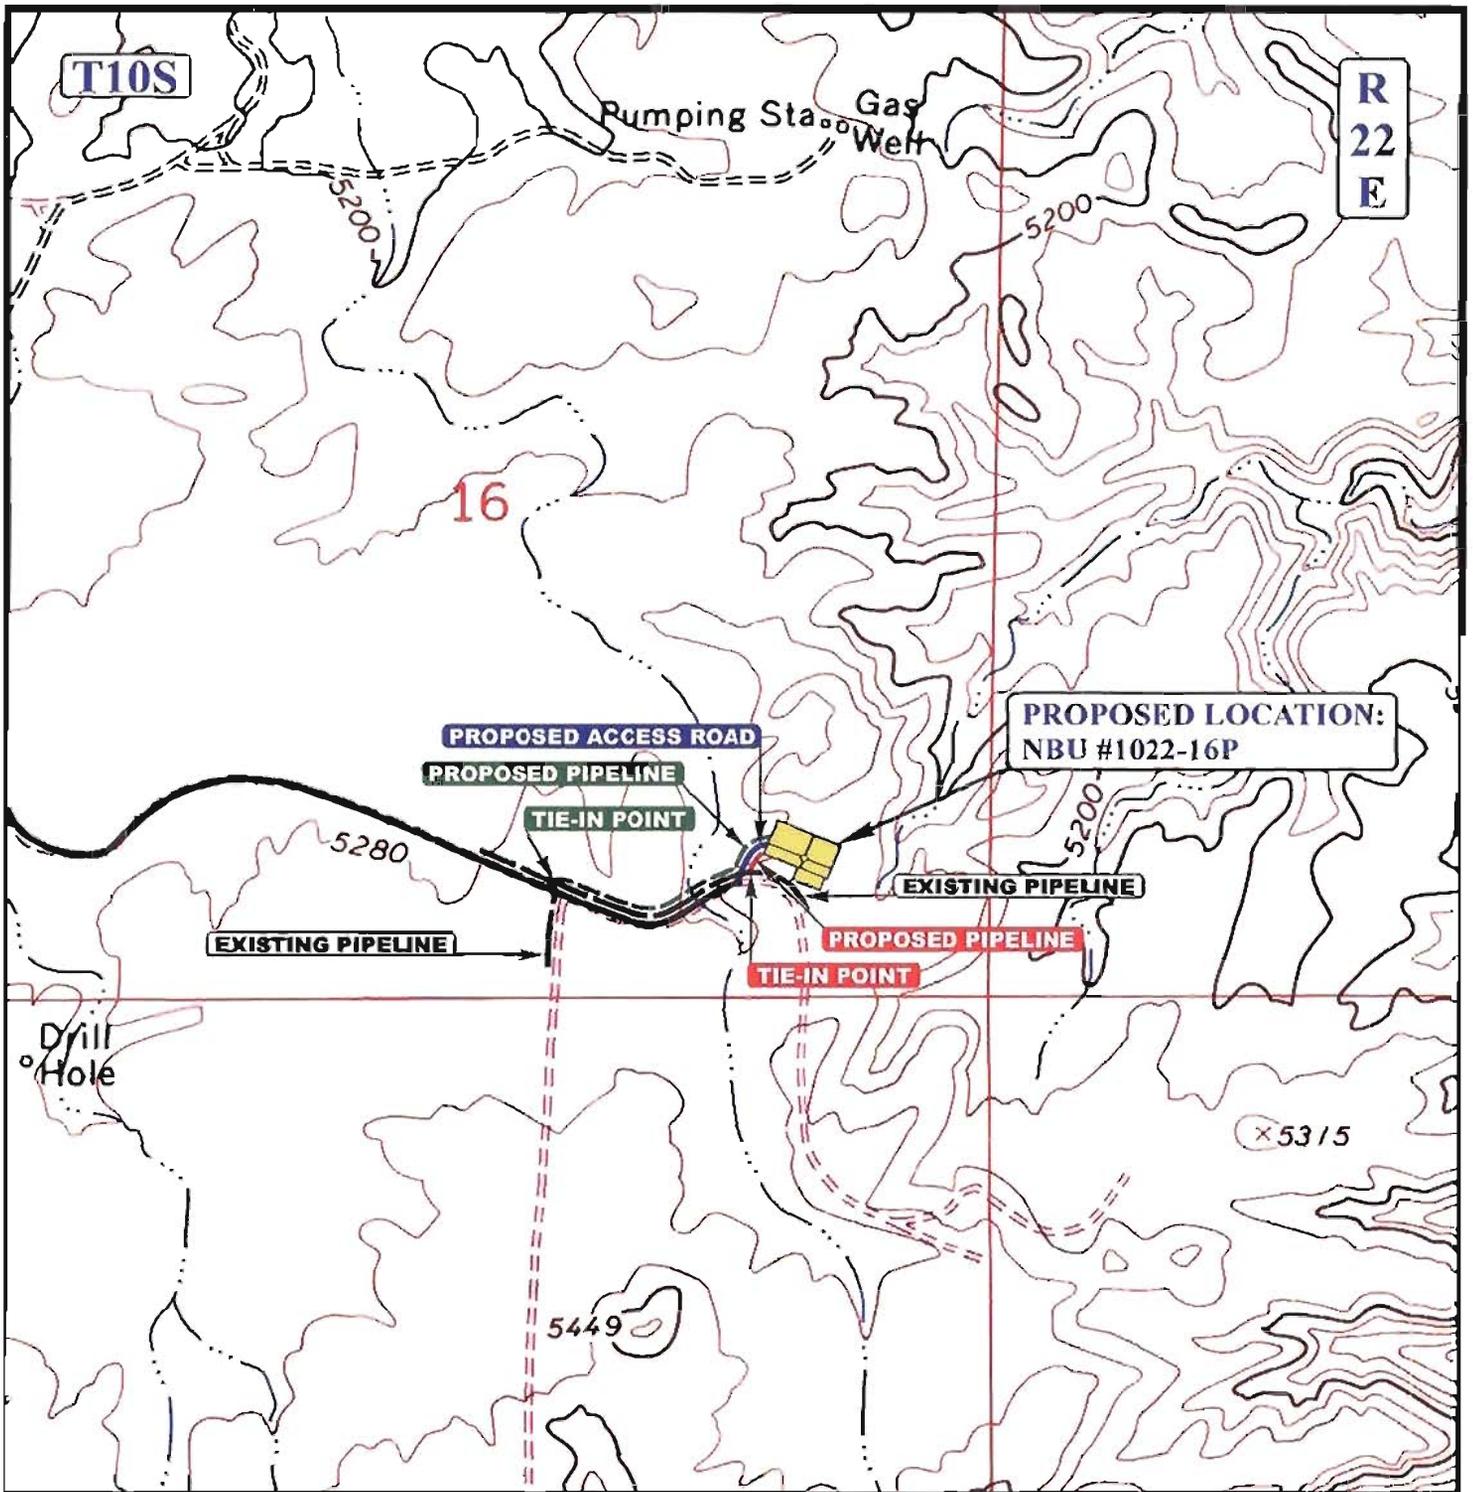

APPROXIMATE TOTAL HIGH-PRESSURE PIPELINE DISTANCE = 1,300' +/-

APPROXIMATE TOTAL LOW-PRESSURE PIPELINE DISTANCE = 180' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- PROPOSED LOW-PRESSURE PIPELINE
- PROPOSED HIGH-PRESSURE PIPELINE



Kerr-McGee Oil & Gas Onshore LP

NBU #1022-16P

SECTION 16, T10S, R22E, S.L.B.&M.

724' FSL 973' FEL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
 MAP**

01	15	06
MONTH	DAY	YEAR



SCALE: 1" = 1000' DRAWN BY: C.P. REVISED: 03-27-06

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING

1. DJJ
2. CDW

X Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

1/6/2006

FROM: (Old Operator): N2115-Westport Oil & Gas Co., LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024	TO: (New Operator): N2995-Kerr-McGee Oil & Gas Onshore, LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024
---	--

WELL NAME	CA No.	Unit:	NATURAL BUTTES UNIT					
	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 5/10/2006
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 5/10/2006
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- If **NO**, the operator was contacted on: _____
- (R649-9-2)Waste Management Plan has been received on: IN PLACE
- Inspections of LA PA state/fee well sites complete on: n/a 3 LA wells & all PA wells transferred
- Reports current for Production/Disposition & Sundries on: ok

6. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 3/27/2006 BIA not yet

7. **Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: 3/27/2006

8. **Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: n/a

9. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: _____

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 5/15/2006
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 5/15/2006
- Bond information entered in RBDMS on: 5/15/2006
- Fee/State wells attached to bond in RBDMS on: 5/16/2006
- Injection Projects to new operator in RBDMS on: _____
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a Name Change Only

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: CO1203
- Indian well(s) covered by Bond Number: RLB0005239
- (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0005236
- The **FORMER** operator has requested a release of liability from their bond on: n/a rider added KMG
The Division sent response by letter on: _____

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 5/16/2006

COMMENTS:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
KERR-McGEE OIL & GAS ONSHORE LP

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEE ATTACHED

5. Lease Serial No.
MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State
UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

PLEASE BE ADVISED THAT KERR-McGEE OIL & GAS ONSHORE LP, IS CONSIDERED TO BE THE OPERATOR OF THE ATTACHED WELL LOCATIONS. EFFECTIVE JANUARY 6, 2006. KERR-McGEE OIL & GAS ONSHORE LP, IS RESPONSIBLE UNDER TERMS AND CONDITIONS OF THE LEASE(S) FOR THE OPERATIONS CONDUCTED UPON LEASE LANDS. BOND COVERAGE IS PROVIDED BY STATE OF UTAH NATIONWIDE BOND NO. RLB0005237.

RECEIVED

MAY 10 2006

DIV. OF OIL, GAS & MINING

*BLM BOND = C01203
BIA BOND = RLB0005239*

APPROVED 5116106

Earlene Russell

**Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician**

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

RANDY BAYNE

Title

DRILLING MANAGER

Signature

Randy Bayne

Date

May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

WESTPORT OIL & GAS COMPANY L.P.

3a. Address

1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEE ATTACHED

5. Lease Serial No.

MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State

UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

EFFECTIVE JANUARY 6, 2006, WESTPORT OIL & GAS COMPANY L.P., HAS RELINQUISHED THE OPERATORSHIP OF THE ATTACHED WELL LOCATIONS TO KERR-McGEE OIL & GAS ONSHORE LP.

APPROVED 5/16/06
Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

RECEIVED
MAY 10 2006

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

BRAD LANEY

Title

ENGINEERING SPECIALIST

Signature

Date

May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Brad Laney

Title

Date

5-9-06

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

5. LEASE DESIGNATION AND SERIAL NUMBER:
ML-3276

SUNDRY NOTICES AND REPORTS ON WELLS

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

7. UNIT or CA AGREEMENT NAME:
UNIT #891008900A

1. TYPE OF WELL
OIL WELL GAS WELL OTHER _____

8. WELL NAME and NUMBER:
NBU 1022-16P

2. NAME OF OPERATOR:
KERR MCGEE OIL & GAS ONSHORE LP

9. API NUMBER:
4304737766

3. ADDRESS OF OPERATOR:
1368 SOUTH 1200 EAST CITY **VERNAL** STATE **UT** ZIP **84078**

PHONE NUMBER:
(435) 781-7024

10. FIELD AND POOL, OR WILDCAT:
NATURAL BUTTES

4. LOCATION OF WELL
FOOTAGES AT SURFACE: **724'FSL, 973'FEL**

COUNTY: **UINTAH**

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: **SESE 16 10S 22E**

STATE: **UTAH**

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: DOGM APD
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	EXTENSION

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

THE OPERATOR REQUESTS AUTHORIZATION FOR A ONE YEAR EXTENSION FOR THE SUBJECT WELL LOCATION. SO THAT THE DRILLING OPERATIONS MAY BE COMPLETED. THE ORIGINAL APD WAS APPROVED BY THE DIVISION OF OIL, GAS AND MINING ON MARCH 15, 2006.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 02-25-08
By: [Signature]

COPY SENT TO OPERATOR
Date: 2-26-2008
Initials: KS

NAME (PLEASE PRINT) **SHEILA UPCHEGO**
SIGNATURE [Signature]

TITLE **SENIOR LAND ADMIN SPECIALIST**
DATE **2/6/2008**

(This space for State use only)

RECEIVED
FEB 25 2008

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304737766
Well Name: NBU 1022-16P
Location: SE/SE SEC. 16, T10S, R22E
Company Permit Issued to: WESTPORT OIL & GAS COMPANY
Date Original Permit Issued: 3/15/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No


Signature

2/6/2008

Date

Title: SENOIR LAND ADMIN SPECIALIST

Representing: KERR-McGEE OIL & GAS ONSHORE LP

RECEIVED

FEB 25 2008

DIV. OF OIL, GAS & MINING



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

February 26, 2009

Kerr McGee O&G Onshore LP
1368 South 1200 East
Vernal, UT 84078

Re: APD Rescinded – NBU 1022-16P, Sec. 16 T. 10S, R. 22E
Uintah County, Utah API No. 43-047-37766

Ladies and Gentlemen:

The Application for Permit to Drill (APD) for the subject well was approved by the Division of Oil, Gas and Mining (Division) on March 15, 2006. On February 21, 2007 and on February 25, 2008, the Division granted a one-year APD extension. No drilling activity at this location has been reported to the division. Therefore, approval to drill the well is hereby rescinded, effective February 25, 2009.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
SITLA, Ed Bonner



STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT
(highlight changes)

APPLICATION FOR PERMIT TO DRILL			5. MINERAL LEASE NO: ML-3276	6. SURFACE: State
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>			7. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
8. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>			8. UNIT or CA AGREEMENT NAME: NATURAL BUTTES UNIT	
2. NAME OF OPERATOR: WESTPORT OIL & GAS COMPANY, L.P.			9. WELL NAME and NUMBER: NBU 1022-16P	
3. ADDRESS OF OPERATOR: 1368 S 1200 E VERNAL UT 84078			PHONE NUMBER: (435) 781-7060	10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 724' FSL 973' FEL <i>633440x 39 943616</i> AT PROPOSED PRODUCING ZONE: <i>44224574 109.438094</i>			11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 16 10S 22E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 23.3 MILES SOUTHEAST OF OURAY, UTAH			12. COUNTY: UINTAH	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET): 724'	16. NUMBER OF ACRES IN LEASE: 480	17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 40		
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET): REFER TO TOPO C	19. PROPOSED DEPTH: 8,675	20. BOND DESCRIPTION: RLB0005238		
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 5300.7' GL	22. APPROXIMATE DATE WORK WILL START:	23. ESTIMATED DURATION: TO BE DETERMINED		

24. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT	SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT			
	14"	40				
12 1/4"	9 5/8" H-40 32.3#	2,000	PREM CMT	265 SX	1.18	15.6
7 7/8"	4 1/2" I-80 11.6#	8,750	PREM LITE II	380 SX	3.38	11
			50/50 POZ G	1390 SX	1.31	14.3

25. ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES

- | | |
|--|--|
| <input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER | <input checked="" type="checkbox"/> COMPLETE DRILLING PLAN |
| <input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER | <input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER |

NAME (PLEASE PRINT) DEBRA DOMENICI TITLE ASSOC. ENVIRONMENTAL ANALYST
SIGNATURE *Debra Domenici* DATE 2/8/2006


(This space for State use only)

API NUMBER ASSIGNED: 43-047-37766

APPROVAL:

FEB 14 2006

T10S, R22E, S.L.B.&M.

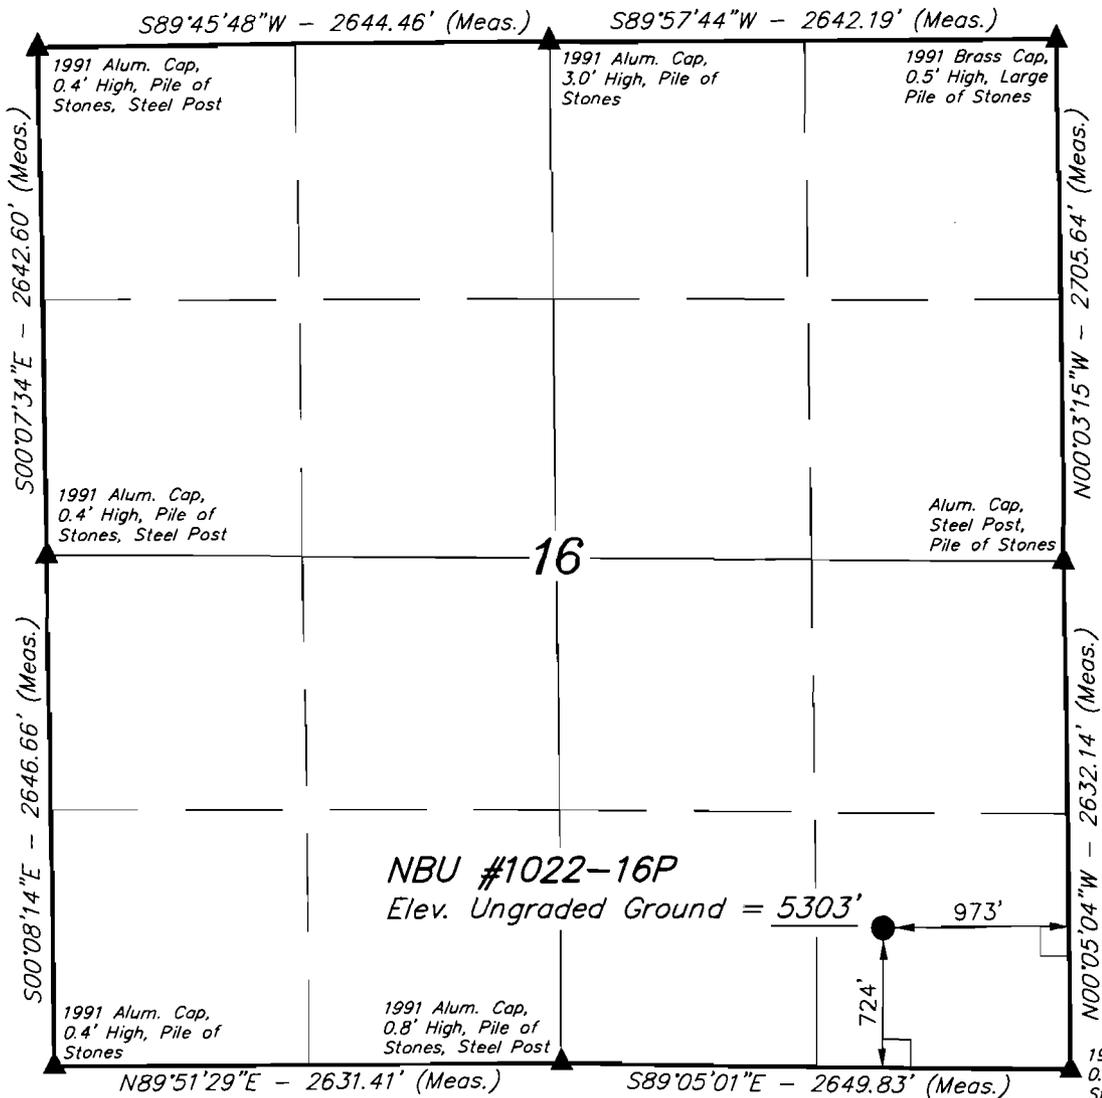

Kerr-McGee Oil & Gas Onshore LP


Well location, NBU #1022-16P, located as shown in the SE 1/4 SE 1/4 of Section 16, T10S, R22E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

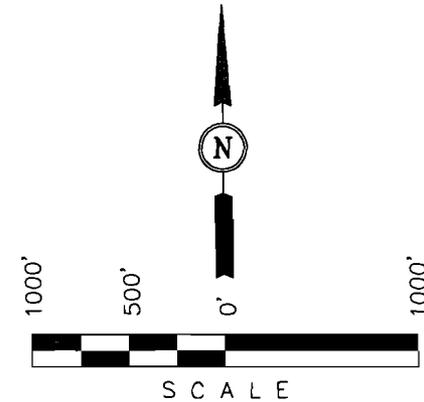

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

[Signature]

REGISTERED LAND SURVEYOR
REGISTRATION NO. 161319
STATE OF UTAH

REVISED: 01-15-06

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)
 LATITUDE = $39^{\circ}56'37.10''$ (39.943639)
 LONGITUDE = $109^{\circ}26'19.68''$ (109.438800)
 (NAD 27)
 LATITUDE = $39^{\circ}56'37.22''$ (39.943672)
 LONGITUDE = $109^{\circ}26'17.22''$ (109.438117)

UINTAH ENGINEERING & LAND SURVEYING

85 SOUTH 200 EAST - VERNAL, UTAH 84078

(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 12-06-05	DATE DRAWN: 12-17-05
PARTY P.J. N.F. P.M.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE Kerr-McGee Oil & Gas Onshore LP	

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT
(highlight changes)

APPLICATION FOR PERMIT TO DRILL		5. MINERAL LEASE NO. ML-3276	6. SURFACE State
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>		7. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>		8. UNIT or CA AGREEMENT NAME: NATURAL BUTTES UNIT	
2. NAME OF OPERATOR: WESTPORT OIL & GAS COMPANY, L.P.		9. WELL NAME and NUMBER: NBU 1022-16P	
3. ADDRESS OF OPERATOR: 1368 S 1200 E VERNAL UT 84078		PHONE NUMBER: (435) 781-7060	10. FIELD AND POOL, OR WILDCAT NATURAL BUTTES
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 724' FSL 973' FEL <i>633440x 3A 943616</i> AT PROPOSED PRODUCING ZONE: <i>44224574 109.438094</i>		11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 16 10S 22E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 23.3 MILES SOUTHEAST OF OURAY, UTAH		12. COUNTY: UINTAH	13. STATE UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 724'	16. NUMBER OF ACRES IN LEASE 480	17. NUMBER OF ACRES ASSIGNED TO THIS WELL 40	
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) REFER TO TOPO C	19. PROPOSED DEPTH: 8,675	20. BOND DESCRIPTION RLB0005238	
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 5300.7' GL	22. APPROXIMATE DATE WORK WILL START	23. ESTIMATED DURATION: TO BE DETERMINED	

24. **PROPOSED CASING AND CEMENTING PROGRAM**

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT	SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT			
	14"	40				
12 1/4"	9 5/8" H-40 32.3#	2,000	PREM CMT	265 SX	1.18	15.6
7 7/8"	4 1/2" I-80 11.6#	8,750	PREM LITE II	380 SX	3.38	11
			50/50 POZ G	1390 SX	1.31	14.3

25. **ATTACHMENTS**

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES

<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER	<input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER

NAME (PLEASE PRINT) DEBRA DOMENICI TITLE ASSOC. ENVIRONMENTAL ANALYST

SIGNATURE *Debra Domenici* DATE 2/8/2006

(This space for State use only)

API NUMBER ASSIGNED: 43-047-37766


**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: 2-15-06

[Signature]

FEB 14 2006

T10S, R22E, S.L.B.&M.

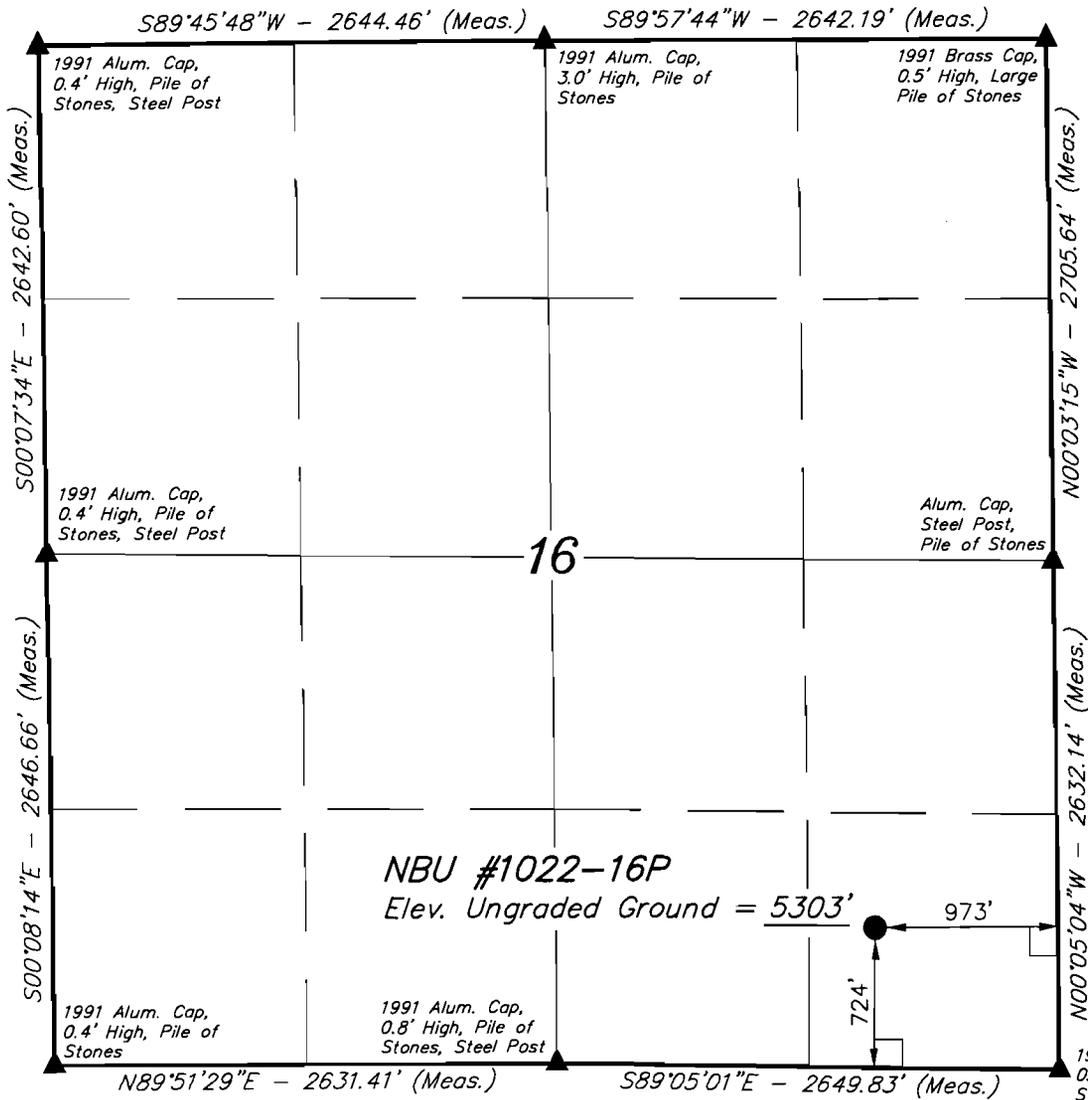

Kerr-McGee Oil & Gas Onshore LP


Well location, NBU #1022-16P, located as shown in the SE 1/4 SE 1/4 of Section 16, T10S, R22E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

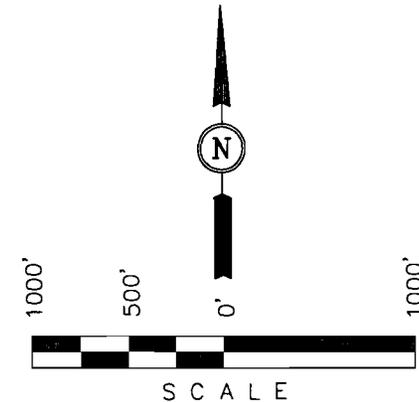

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

[Signature]
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 161319
 STATE OF UTAH

REVISED: 01-15-06

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)
 LATITUDE = 39°56'37.10" (39.943639)
 LONGITUDE = 109°26'19.68" (109.438800)
 (NAD 27)
 LATITUDE = 39°56'37.22" (39.943672)
 LONGITUDE = 109°26'17.22" (109.438117)

UINTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 12-06-05	DATE DRAWN: 12-17-05
PARTY P.J. N.F. P.M.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE Kerr-McGee Oil & Gas Onshore LP	

NBU 1022-16P
SESE SEC 16-T10S-R22E
UINTAH COUNTY, UTAH
ML-3276

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. **Estimated Tops of Important Geologic Markers:**

<u>Formation</u>	<u>Depth</u>
Uinta	0- Surface
Green River	1175'
Wasatch	4200'
Mesaverde	6650'
TD	8675'

2. **Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:**

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
	Green River	1175'
Gas	Wasatch	4200'
Gas	Mesaverde	6650'
Water	N/A	
Other Minerals	N/A	

3. **Pressure Control Equipment** (Schematic Attached)

Please refer to the attached Drilling Program.

4. **Proposed Casing & Cementing Program:**

Please refer to the attached Drilling Program.

5. **Drilling Fluids Program:**

Please refer to the attached Drilling Program.

6. **Evaluation Program:**

Please refer to the attached Drilling Program.

7. **Abnormal Conditions:**

Maximum anticipated bottomhole pressure calculated at 8675' TD, approximately equals 5378.5 psi (calculated at 0.62 psi/foot).

Maximum anticipated surface pressure equals approximately 3464.5 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. **Anticipated Starting Dates:**

Drilling is planned to commence immediately upon approval of this application.

9. **Variances:**

Please refer to the attached Drilling Program.

10. **Other Information:**

Please refer to the attached Drilling Program.



**Kerr-McGee Oil & Gas Onshore LP
DRILLING PROGRAM**

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'				2270	1370	254000
SURFACE	9-5/8"	0 to 2000	32.30	H-40	STC	0.69*****	1.58	4.49
PRODUCTION	4-1/2"	0 to 8675	11.60	M-80 or I-80	LTC	2.37	1.22	201000

1) Max Anticipated Surf. Press. (MASP) (Surface Casing) = (Pore Pressure at next csg point - (0.22 psi/ft - partial evac gradient x TVD of next csg point)

2) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft - partial evac gradient x TD)

(Burst Assumptions: TD = 11.5 ppg)

.22 psi/ft = gradient for partially evac wellbore

(Collapse Assumption: Fully Evacuated Casing, Max MW)

(Tension Assumptions: Air Weight of Casing * Buoy. Fact. of water)

MASP 3279 psi

***** Burst SF is low but csg is much stronger than formation at 2000'. EMW @ 2000' for 2270# is 21.8 ppg or 1.13 psi/ft

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	LEAD	500	Premium cmt + 2% CaCl + .25 pps flocele	215	60%	15.60	1.18
Option 1	TOP OUT CMT (1)	200	20 gals sodium silicate + Premium cmt + 2% CaCl + .25 pps flocele	50		15.60	1.18
	TOP OUT CMT (2)	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
SURFACE		NOTE: If well will circulate water to surface, option 2 will be utilized					
Option 2	LEAD	1500	Prem cmt + 16% Gel + 10 pps gilsonite + .25 pps Flocele + 3% salt BWOC	170	35%	11.00	3.82
	TAIL	500	Premium cmt + 2% CaCl + .25 pps flocele	180	35%	15.60	1.18
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
PRODUCTION	LEAD	3,695'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	380	60%	11.00	3.38
	TAIL	4,980'	50/50 Poz/G + 10% salt + 2% gel	1390	60%	14.30	1.31

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained

*Substitute caliper hole volume plus 15% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 5M with one annular and 2 rams. Test to 5,000 psi (annular to 2,500 psi) prior to drilling out. Record on chart recorder &

tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on ng floor at all times. Kelly to be equipped with upper

& lower kelly valves.

Drop Tolco surveys every 2000'. Maximum allowable hole angle is 5 degrees.

Most rigs have PVT Systems for mud monitoring. If no PVT is available, visual monitoring will be utilized.



DRILLING ENGINEER: _____
Brad Laney

DATE: _____

DRILLING SUPERINTENDENT: _____
Randy Bayne

DATE: _____

5M BOP STACK and CHOKE MANIFOLD SYSTEM

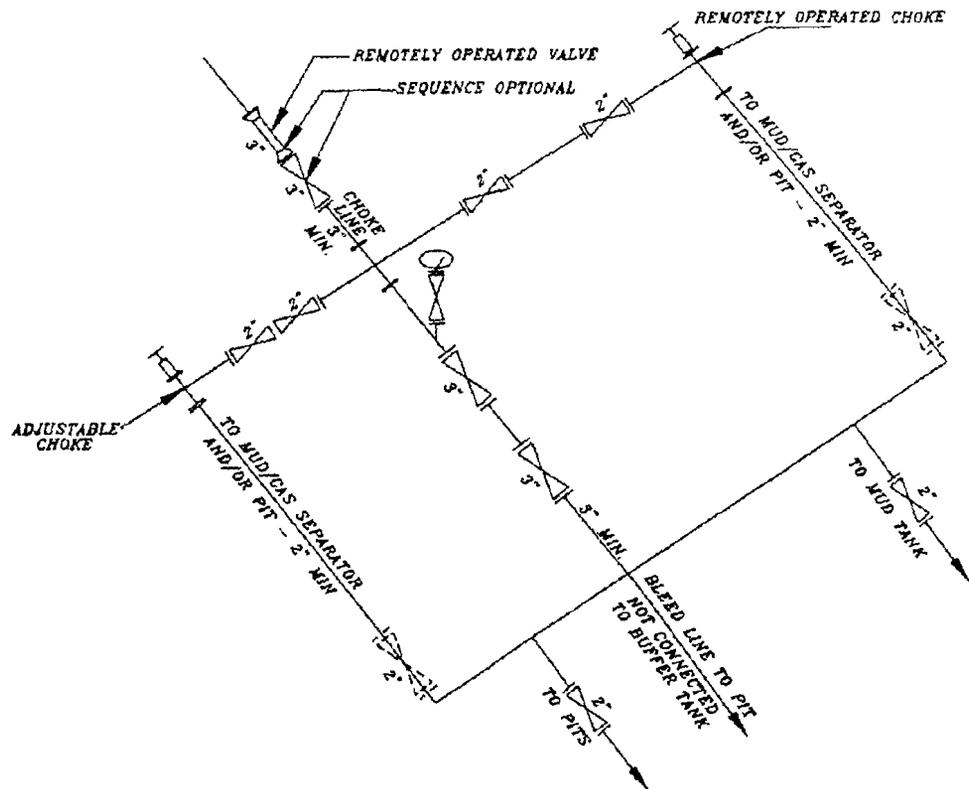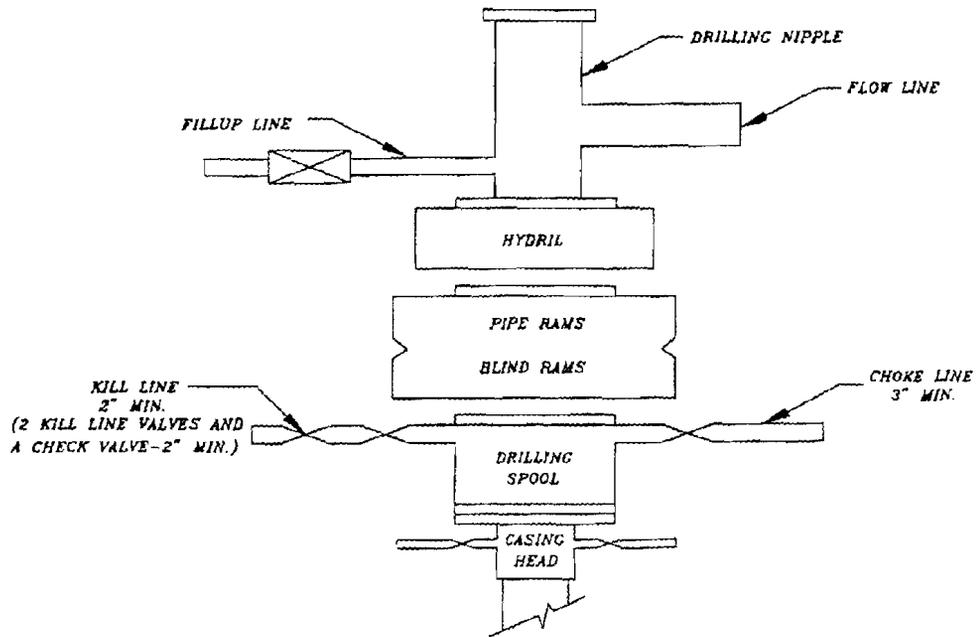

**NBU 1022-16P
SESE SEC 16-T10S-R22E
Uintah County, UT
ML-3276**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. Existing Roads:

Refer to Topo Map A for directions to the location.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

Refer to Topo Maps A and B for location of access roads within a 2 mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

2. Planned Access Roads:

Approximately 250' of new access road is proposed. Refer to Topo Map B for the location of the proposed access road.

The upgraded and new portions of the access road will be crowned and ditched with a running surface of 18 feet and a maximum disturbed width of 30 feet. Appropriate water control will be installed to control erosion.

Existence of pipelines; maximum grade; turnouts; major cut and fills, culverts, or bridges; gates, cattle guards, fence cuts, or modifications to existing facilities were determined at the on-site.

The access road was centerline flagged during time of staking.

Surfacing material may be necessary, depending upon weather conditions.

Surface disturbance and vehicular traffic will be limited to the approved location and approved access route. Any additional area needed will be approved in advance.

3. Location of Existing Wells Within a 1-Mile Radius

Please refer to Topo Map C.

4. Location of Existing & Proposed Facilities

The following guidelines will apply if the well is productive.

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain

fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The required color is Carlsbad Canyon, standard color number 2.5Y 6/2.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

Approximately 180' of pipeline is proposed. Refer to Topo D for the proposed pipeline.

5. Location and Type of Water Supply:

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec. 32, T4S, R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

6. Source of Construction Materials

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

7. Methods of Handling Waste Materials

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge of liquids.

A plastic reinforced liner and felt will be used, it will be a minimum of 20 mil thick, with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec. 35, T9S, R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E.

8. Ancillary Facilities

None are anticipated.

9. Well Site Layout: (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

The reserve pit will be lined, and when the reserve pit is closed, the pit liner will be buried below plow depth.

All pits will be fenced according to the following minimum standards:

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

The net wire shall be no more than two inches above the ground. The barbed wire shall be three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Location size may change prior to the drilling of the well due to current rig availability. If the proposed location is not large enough to accommodate the drilling rig the location will be re-surveyed and a Form 9 shall be submitted.

10. Plans for Reclamation of the Surface:

Producing Location:

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

A plastic, nylon reinforced liner will be used, it shall be torn and perforated before backfilling of the reserve pit.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water (s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling, and recontouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

Dry Hole/Abandoned Location:

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations.

11. **Surface Ownership:**

SITLA
675 East 500 South, Suite 500
Salt Lake City, UT 84102

12. **Other Information:**

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance.

The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

A Class III archaeological survey has been completed and is attached.

This location is not within 460' from the boundary of the Natural Buttes Unit, nor is it Within 460' of any non-committed tract lying within the boundaries of the Unit.

13. **Lessee's or Operators's Representative & Certification:**

Debra Domenici
Associate Environmental Analyst
Kerr-McGee Oil & Gas Onshore LP
1368 South 1200 East.
Vernal, UT 84078
(435) 781-7060

Randy Bayne
Drilling Manager
Kerr-McGee Oil & Gas Onshore LP
1368 South 1200 East
Vernal, UT 84078
(435)781-7018

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Kerr-McGee Oil & Gas Onshore LP is considered to be the operator of the subject well. Kerr-McGee Oil & Gas Onshore LP agrees to be responsible under terms and conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by State Surety Bond #RLB0005236.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.



Debra Domenici

2/8/2006

Date

Kerr-McGee Oil & Gas Onshore LP
NBU #1022-16P
SECTION 16, T10S, R22E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 11.2 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 8.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY DIRECTION APPROXIMATELY 1.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN RIGHT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 1.3 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTHEAST; FOLLOW ROAD FLAGS IN A NORTHEASTERLY DIRECTION APPROXIMATELY 250' TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 54.3 MILES.

Kerr-McGee Oil & Gas Onshore LP

NBU #1022-16P

LOCATED IN UINTAH COUNTY, UTAH
SECTION 16, T10S, R22E, S.L.B.&M.

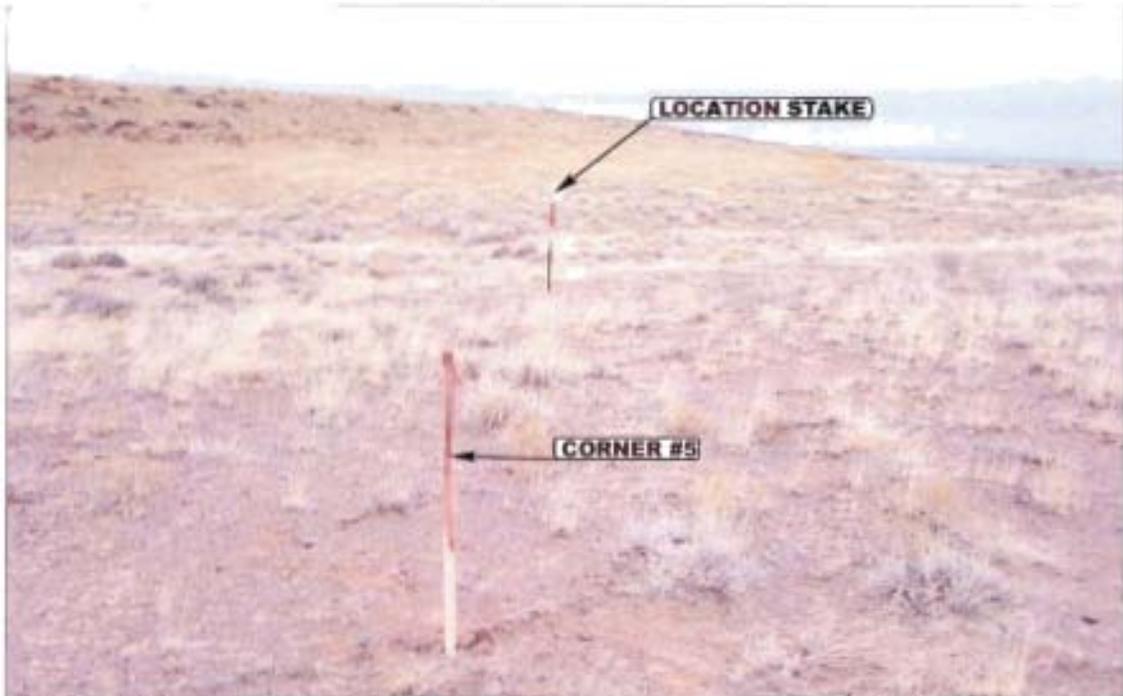


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHEASTERLY



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

12 09 05
MONTH DAY YEAR

PHOTO

TAKEN BY: P.J.

DRAWN BY: C.P.

REVISED: 01-15-06

- Since 1964 -

Kerr-McGee Oil & Gas Onshore LP

NBU #1022-16P

PIPELINE ALIGNMENT

LOCATED IN UINTAH COUNTY, UTAH

SECTION 16, T10S, R22E, S.L.B.&M.

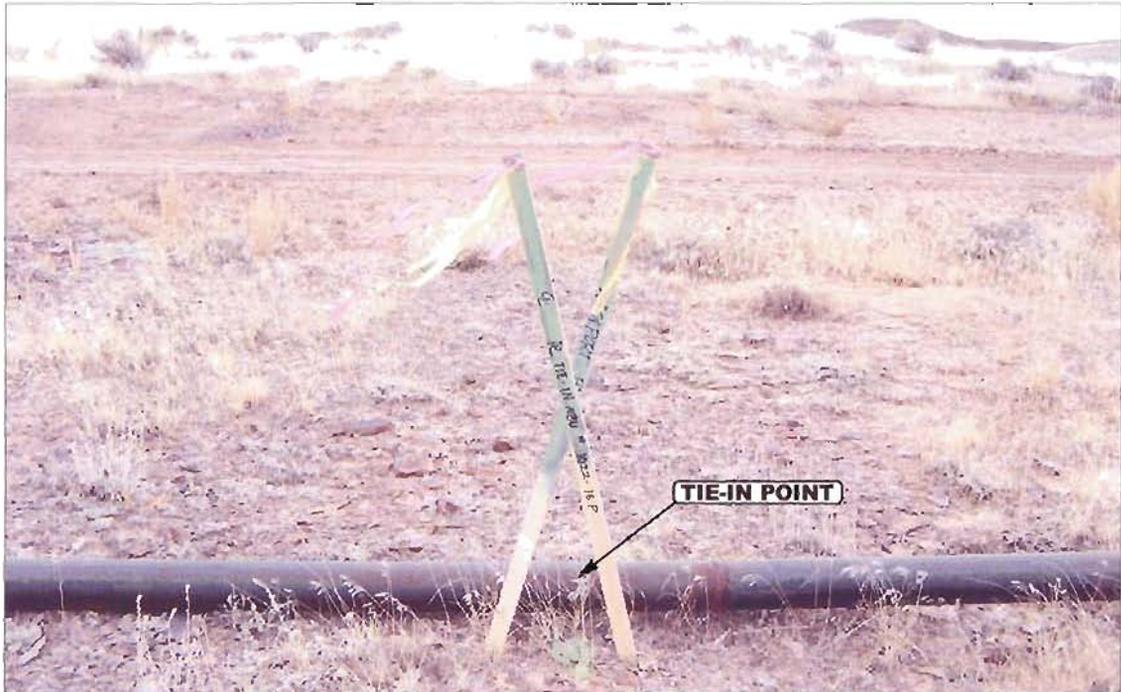


PHOTO: VIEW FROM TIE-IN POINT

CAMERA ANGLE: SOUTHERLY



PHOTO: VIEW OF PIPELINE ALIGNMENT

CAMERA ANGLE: NORTHERLY



UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

- Since 1964 -

PIPELINE PHOTOS


12 09 05
MONTH DAY YEAR

PHOTO

TAKEN BY: P.J.

DRAWN BY: C.P.

REVISED: 01-15-06

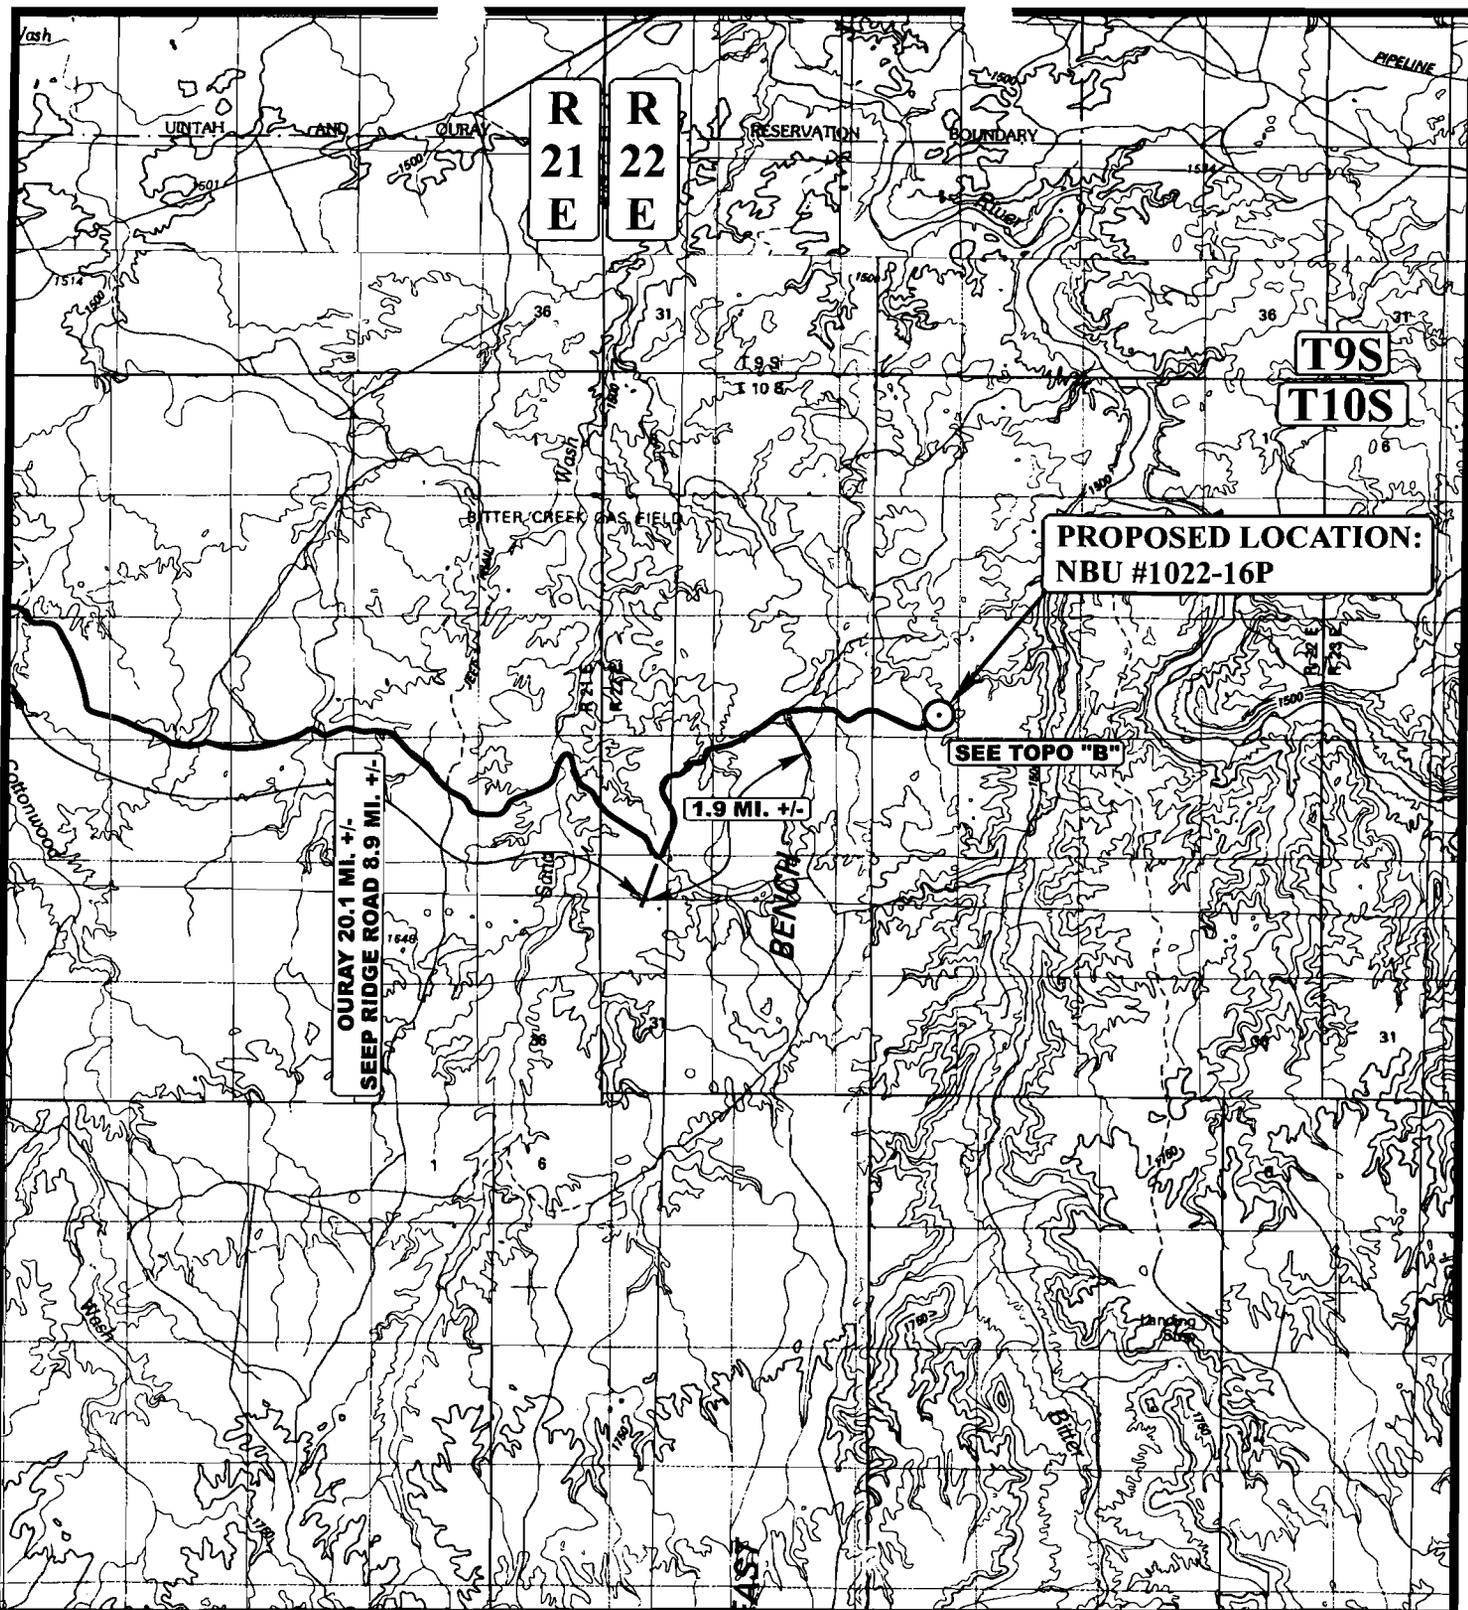

LEGEND:

⊙ PROPOSED LOCATION



Kerr-McGee Oil & Gas Onshore LP

NBU #1022-16P

SECTION 16, T10S, R22E, S.L.B.&M.

724' FSL 973' FEL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP


12 09 05
 MONTH DAY YEAR

SCALE: 1:100,000

DRAWN BY: C.P.

REVISED: 01-15-06



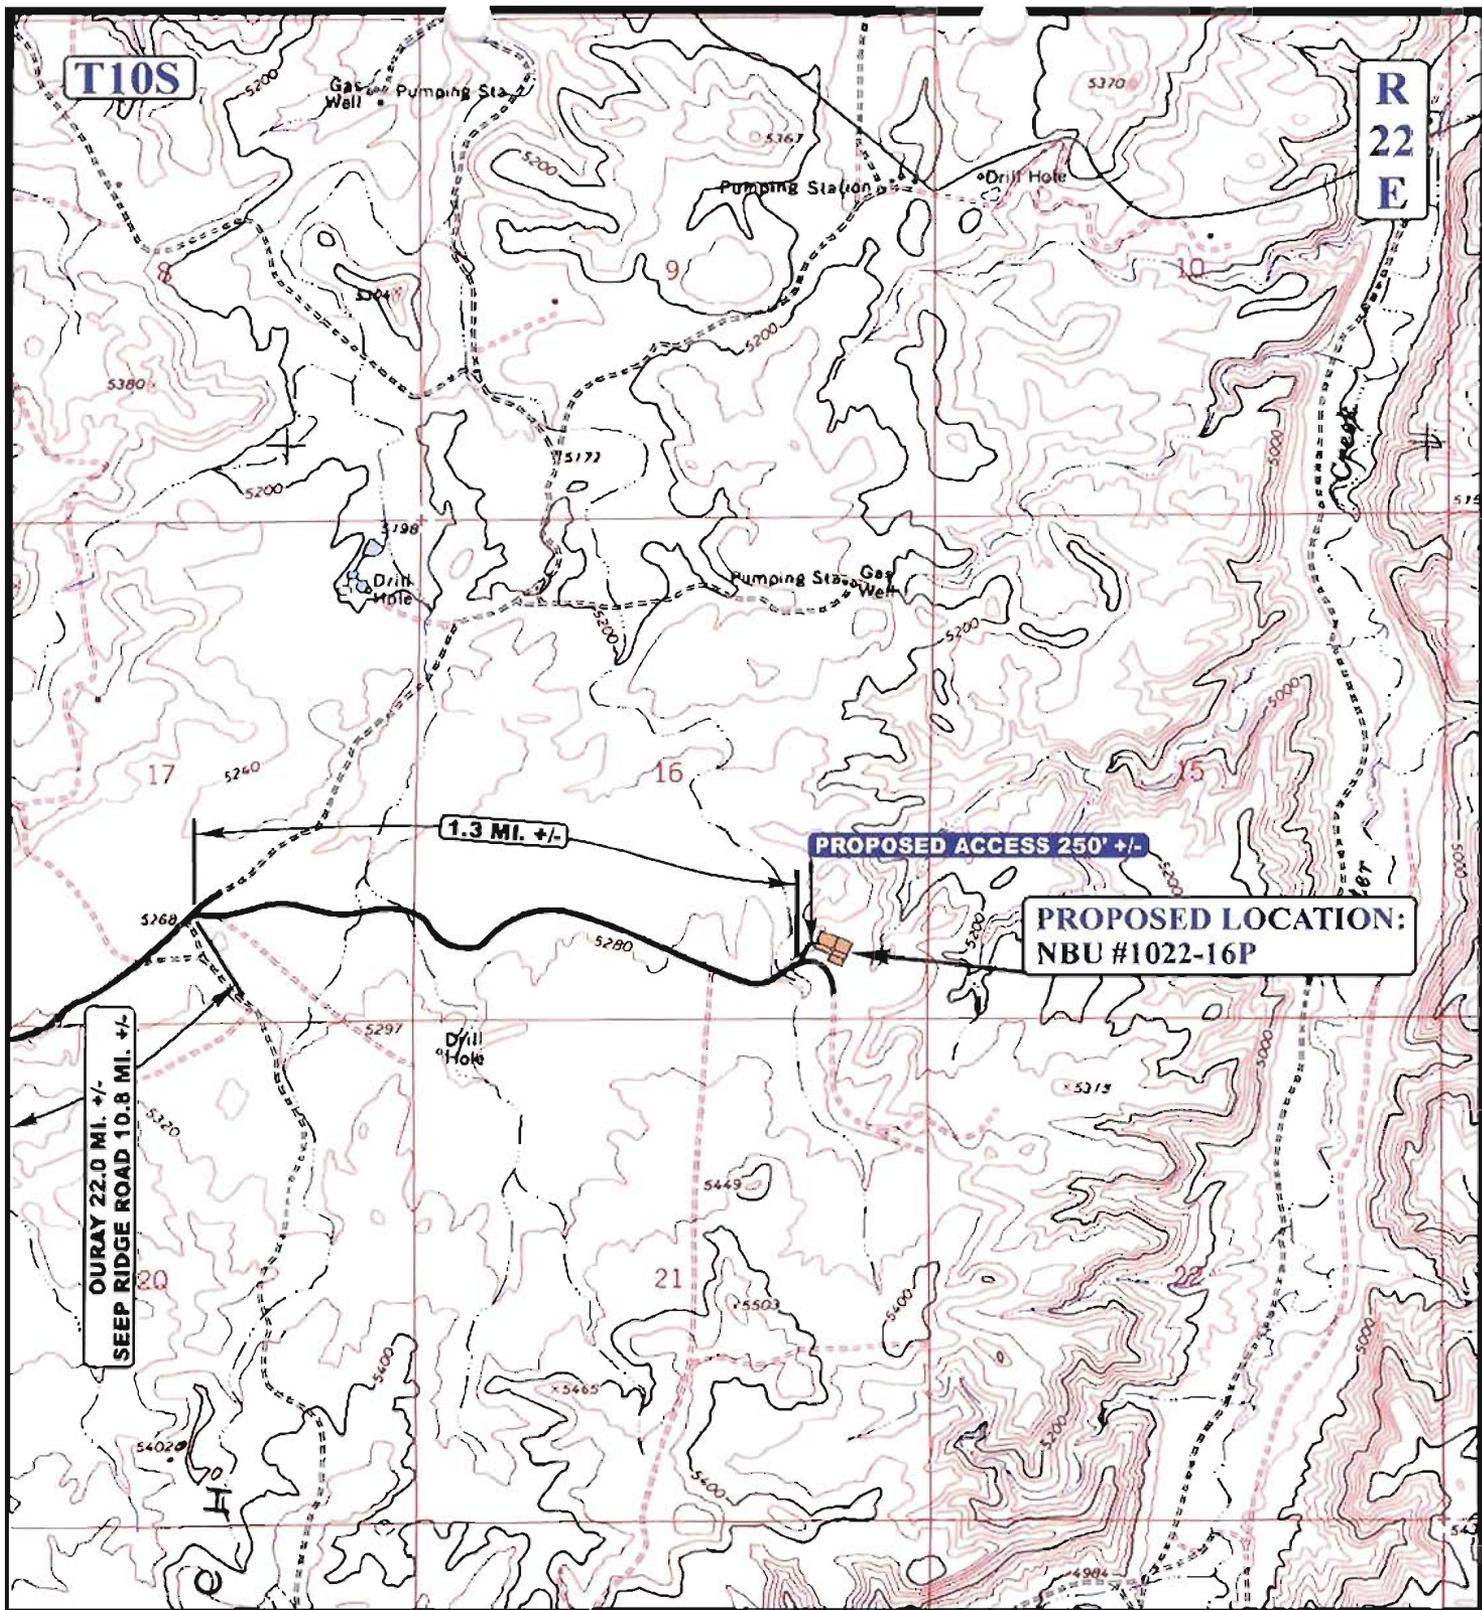

LEGEND:

- EXISTING ROAD
- - - - - PROPOSED ACCESS ROAD



Kerr-McGee Oil & Gas Onshore LP

NBU #1022-16P

SECTION 16, T10S, R22E, S.L.B.&M.

724' FSL 973' FEL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 ~ FAX (435) 789-1813

**TOPOGRAPHIC
 MAP**


12 09 05
 MONTH DAY YEAR



SCALE: 1" = 2000'

DRAWN BY: C.P.

REVISED: 01-15-06

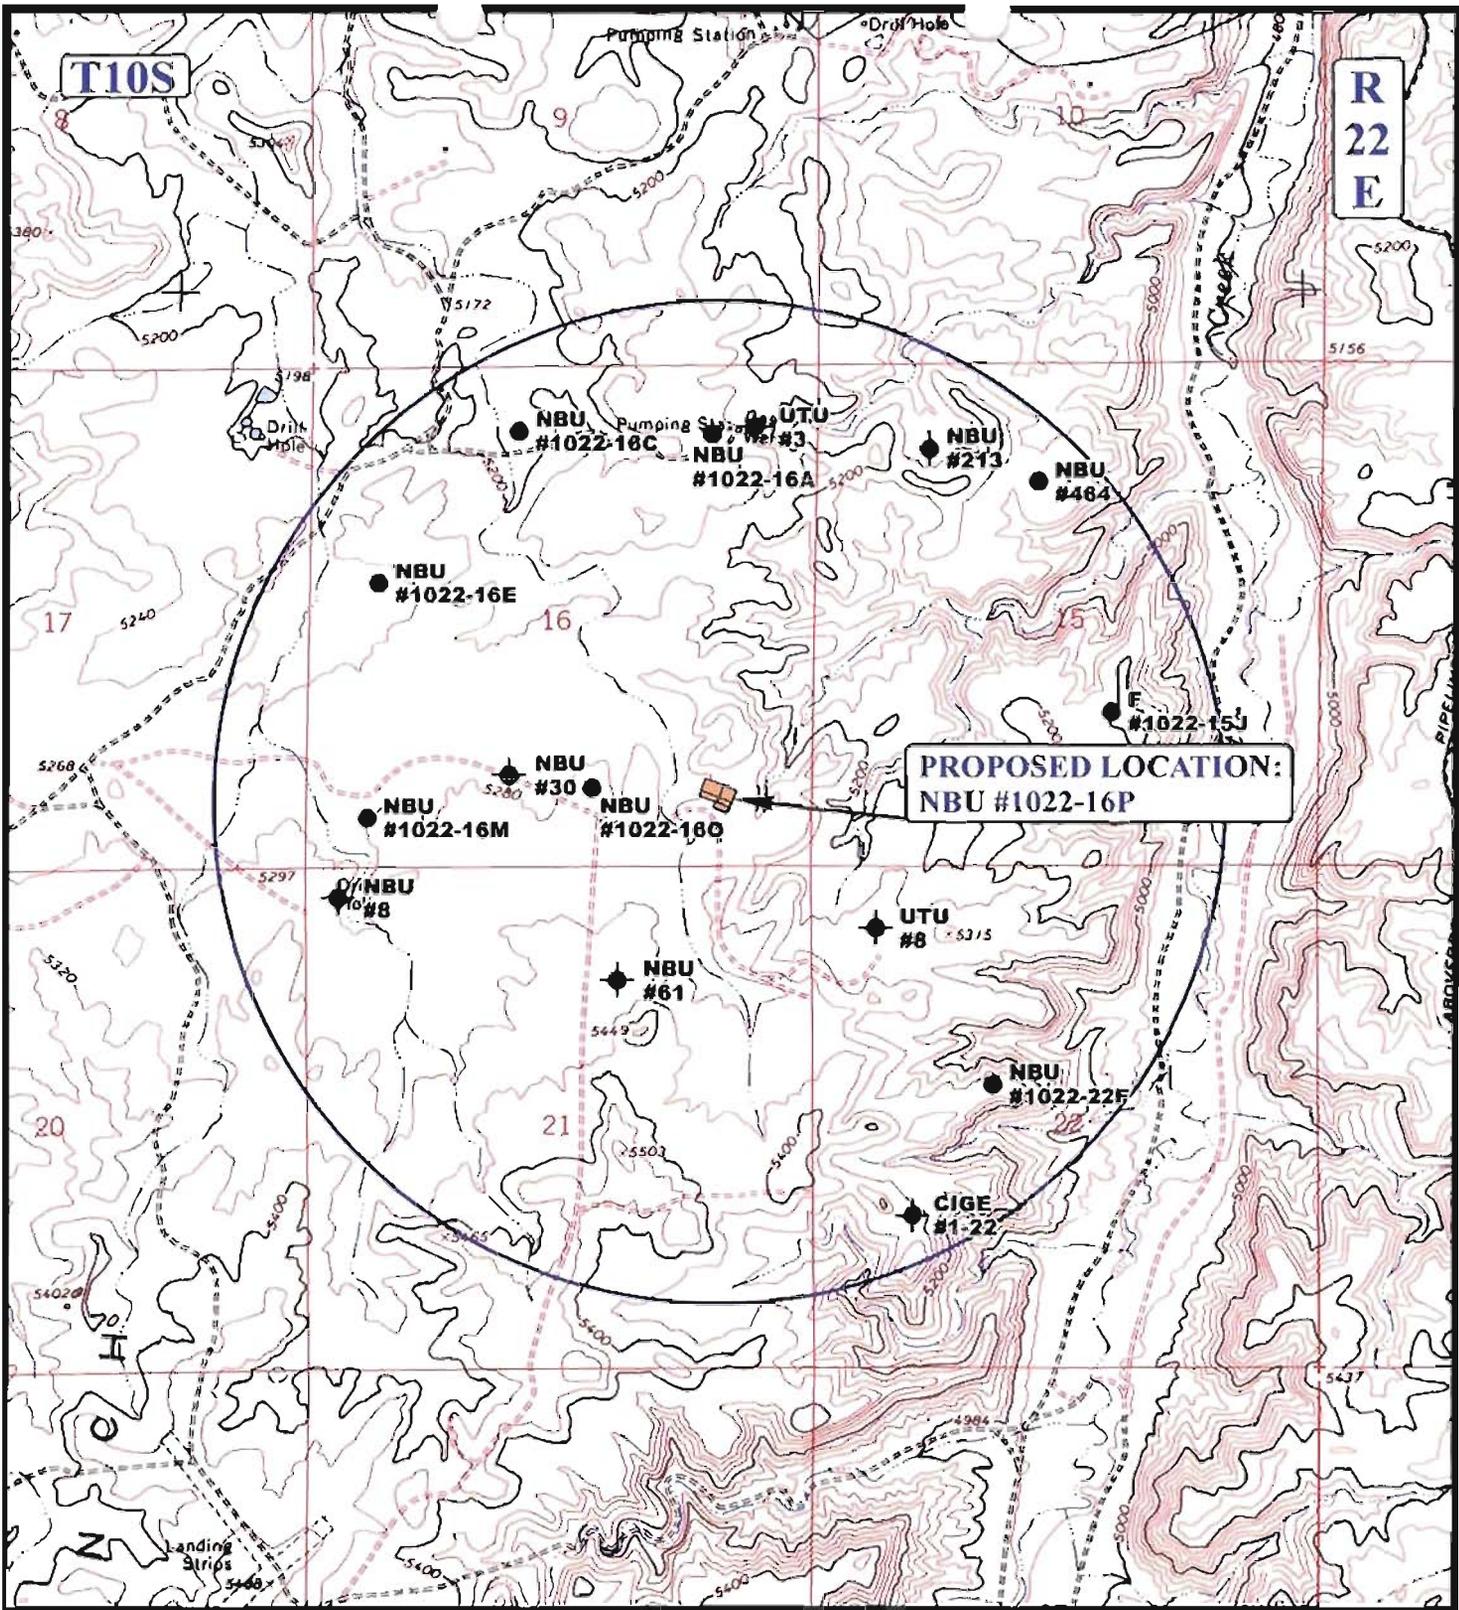

**PROPOSED LOCATION:
NBU #1022-16P**

LEGEND:

- DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- WATER WELLS
- ◆ ABANDONED WELLS
- TEMPORARILY ABANDONED


Kerr-McGee Oil & Gas Onshore LP

**NBU #1022-16P
SECTION 16, T10S, R22E, S.L.B.&M.
724' FSL 973' FEL**

UEIS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC MAP 12 09 05
MONTH DAY YEAR
SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 01-15-06 **C TOPO**

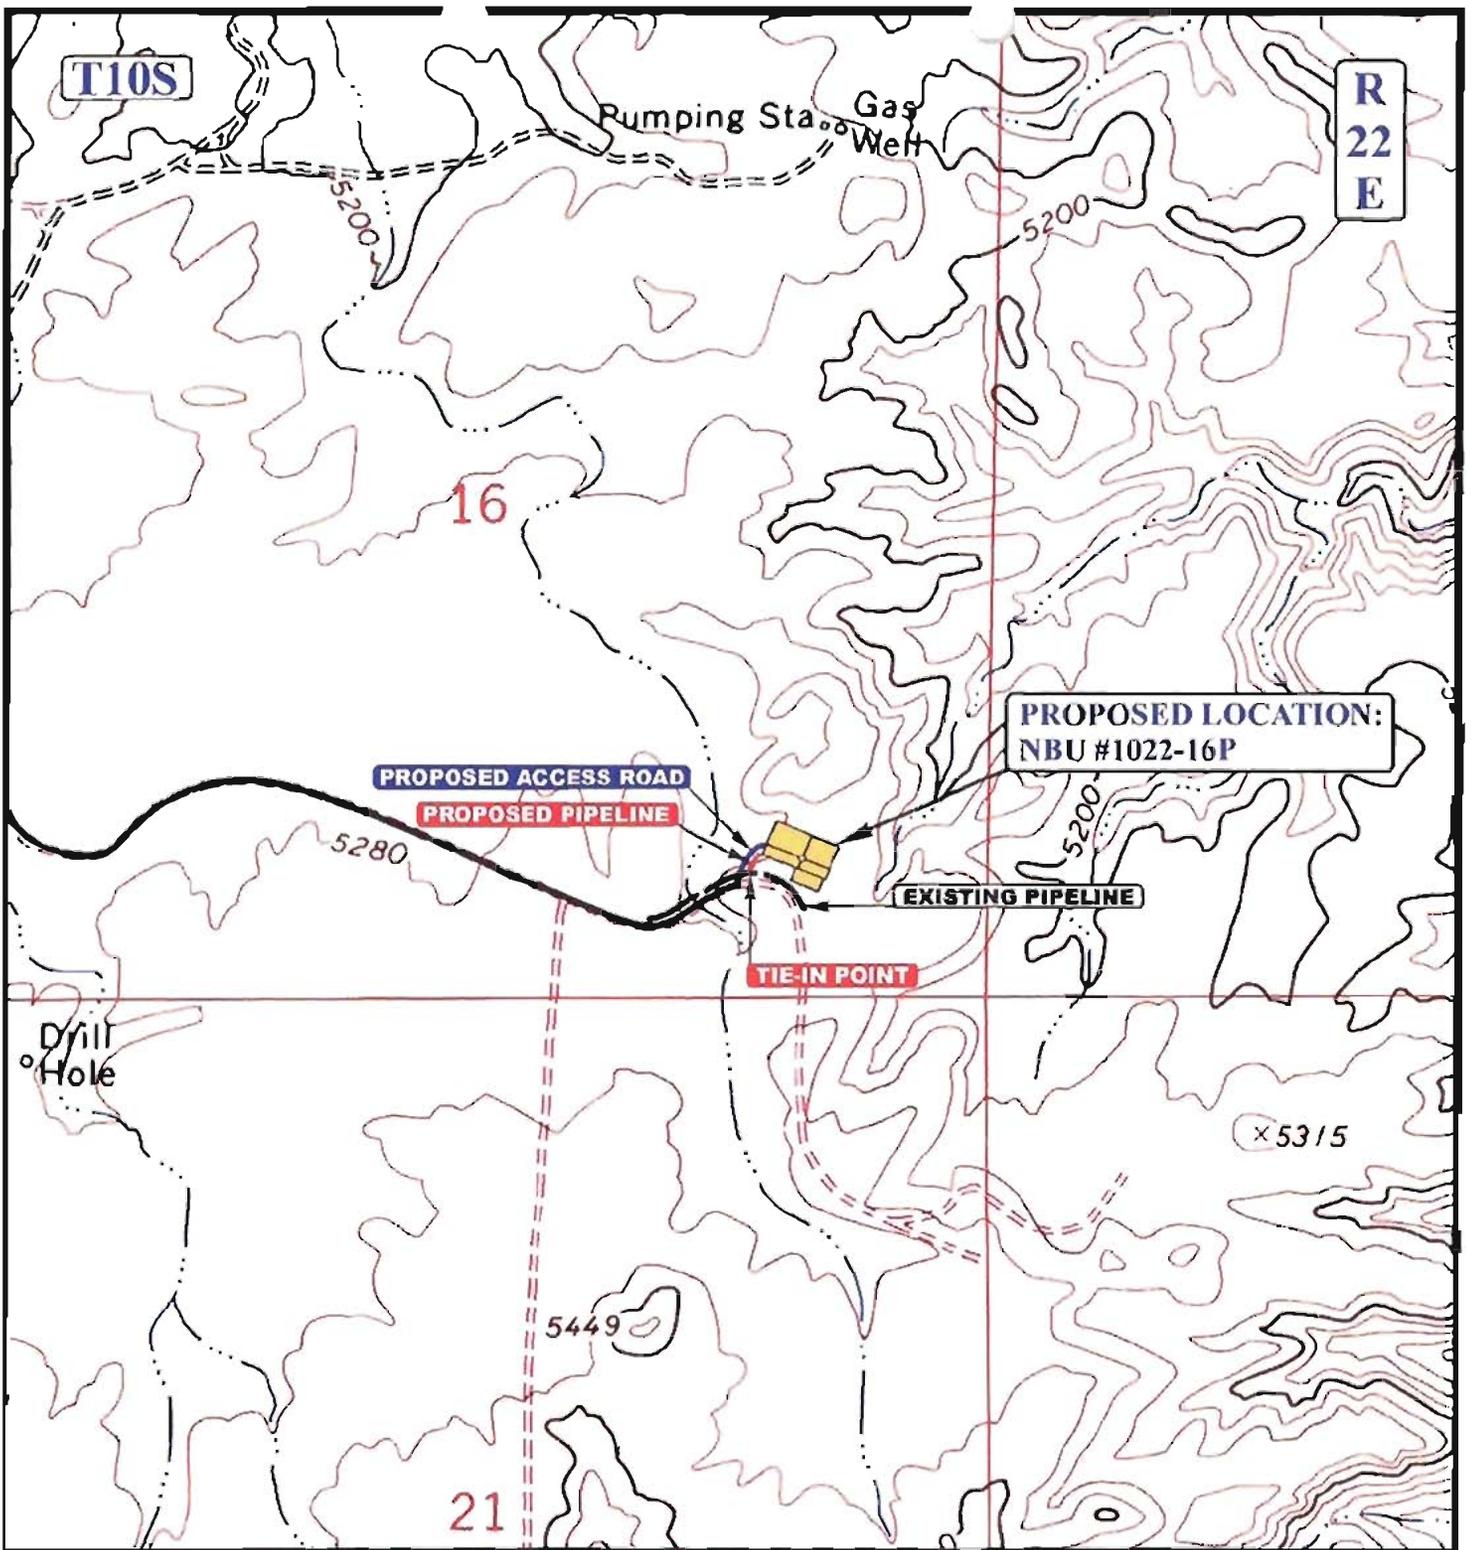

APPROXIMATE TOTAL PIPELINE DISTANCE = 180' +/-

LEGEND:

-  PROPOSED ACCESS ROAD
-  EXISTING PIPELINE
-  PROPOSED PIPELINE

Kerr-McGee Oil & Gas Onshore LP

NBU #1022-16P

SECTION 16, T10S, R22E, S.L.B.&M.

724' FSL 973' FEL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 - FAX (435) 789-1813



TOPOGRAPHIC **12 09 05**
MAP MONTH DAY YEAR
 SCALE: 1" = 1000' DRAWN BY: C.P. REVISED: 01-15-06




Kerr-McGee Oil & Gas Onshore LP

FIGURE #1

LOCATION LAYOUT FOR

NBU #1022-16P
SECTION 16, T10S, R22E, S.L.B.&M.
724' FSL 973' FEL

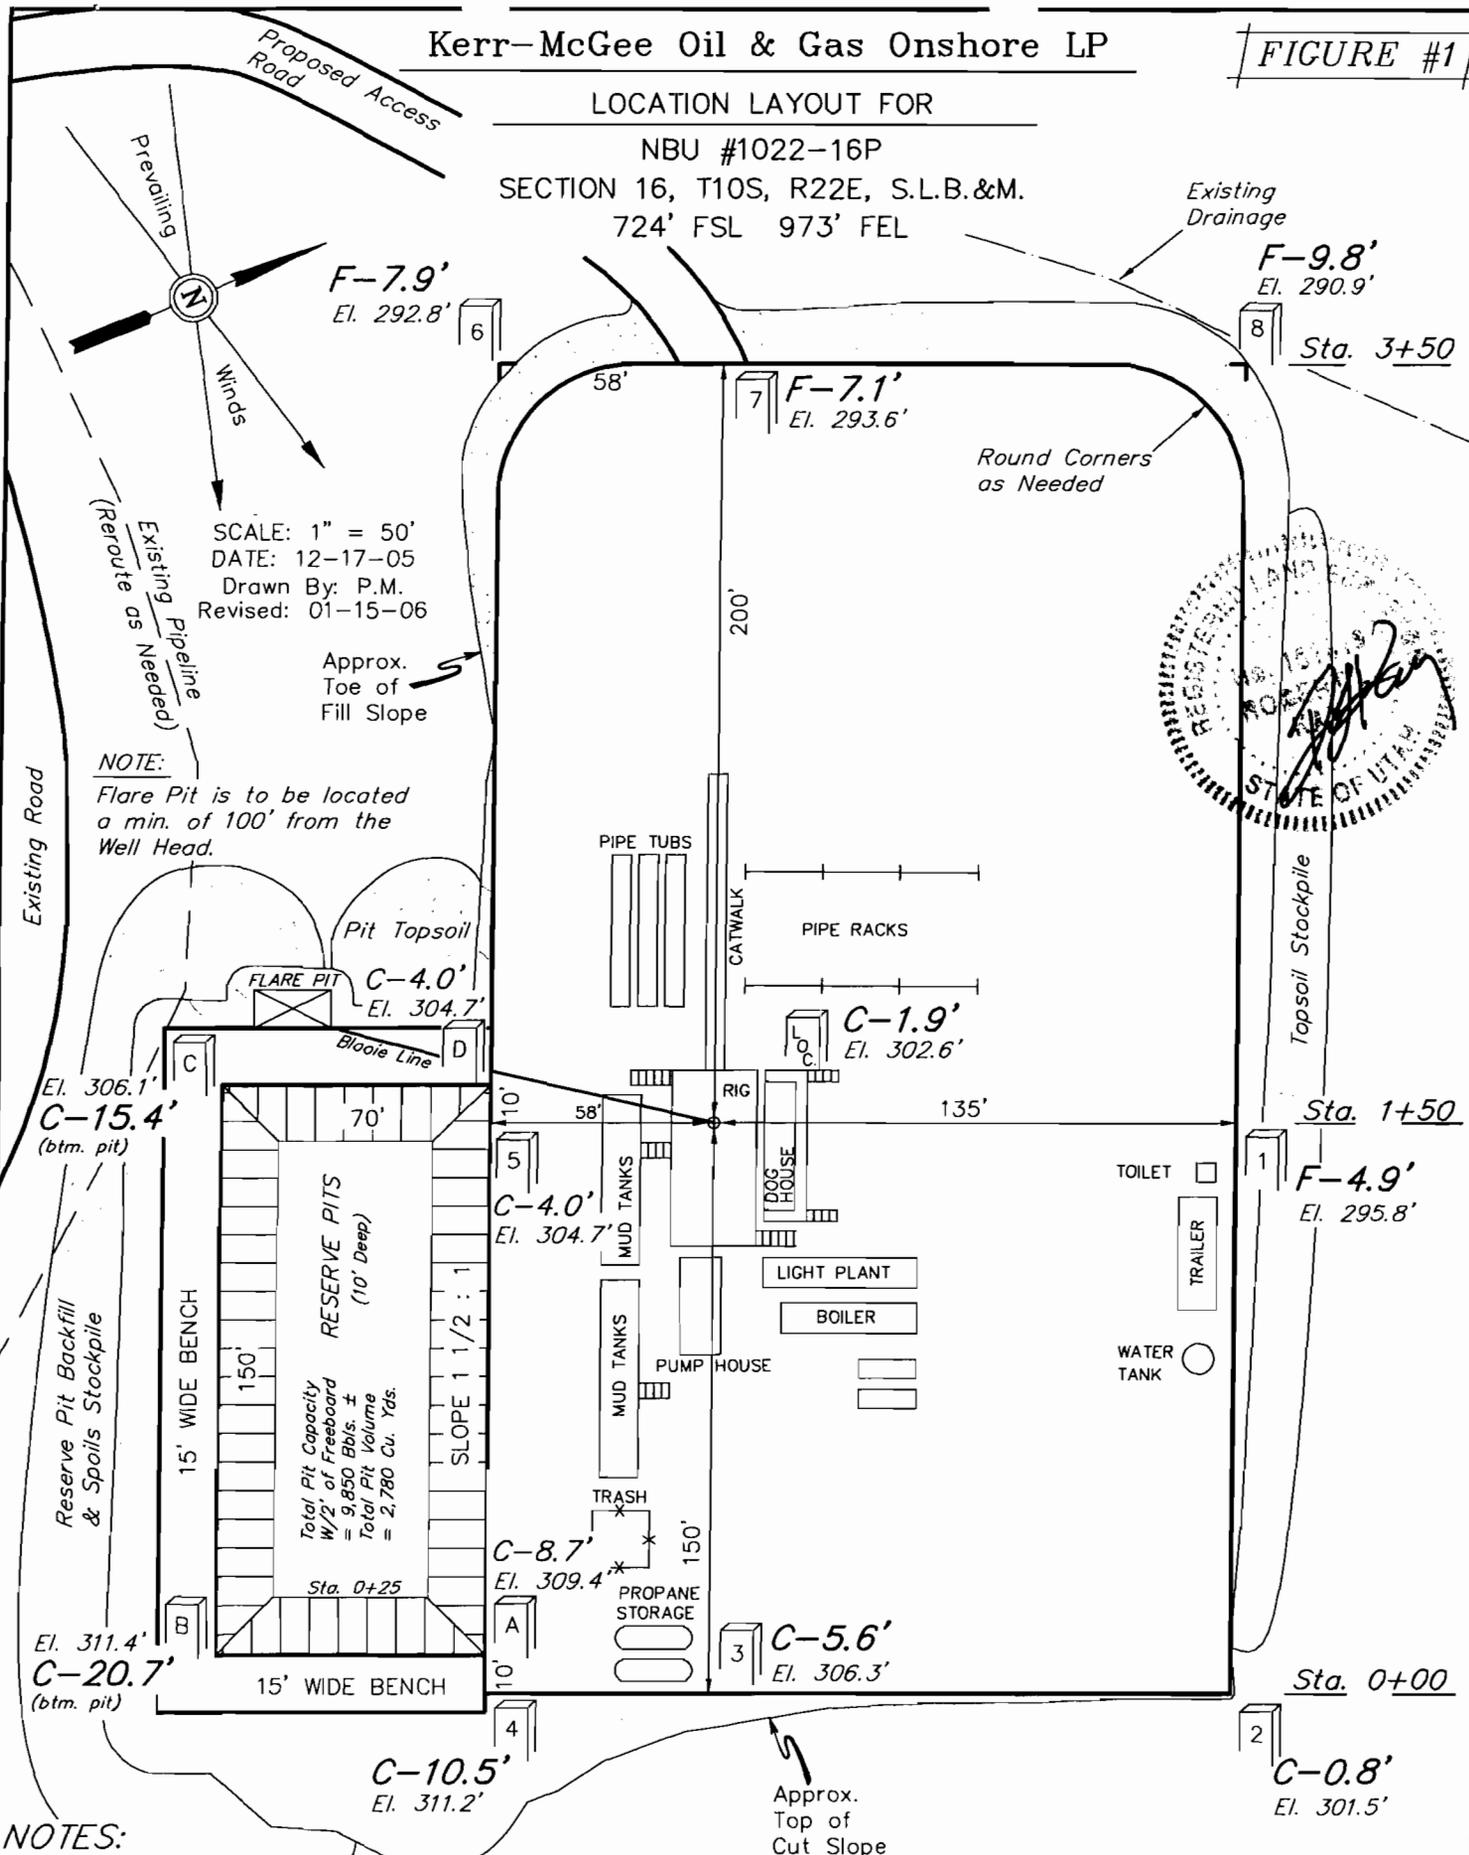

SCALE: 1" = 50'
DATE: 12-17-05
Drawn By: P.M.
Revised: 01-15-06

NOTE:
Flare Pit is to be located
a min. of 100' from the
Well Head.

NOTES:

Elev. Ungraded Ground At Loc. Stake = 5302.6'
FINISHED GRADE ELEV. AT LOC. STAKE = 5300.7'


Kerr-McGee Oil & Gas Onshore LP

FIGURE #2

TYPICAL CROSS SECTIONS FOR
 NBU #1022-16P
 SECTION 16, T10S, R22E, S.L.B.&M.
 724' FSL 973' FEL

X-Section Scale
 1" = 20'
 1" = 50'

DATE: 12-17-05
 Drawn By: P.M.
 Revised: 01-15-06

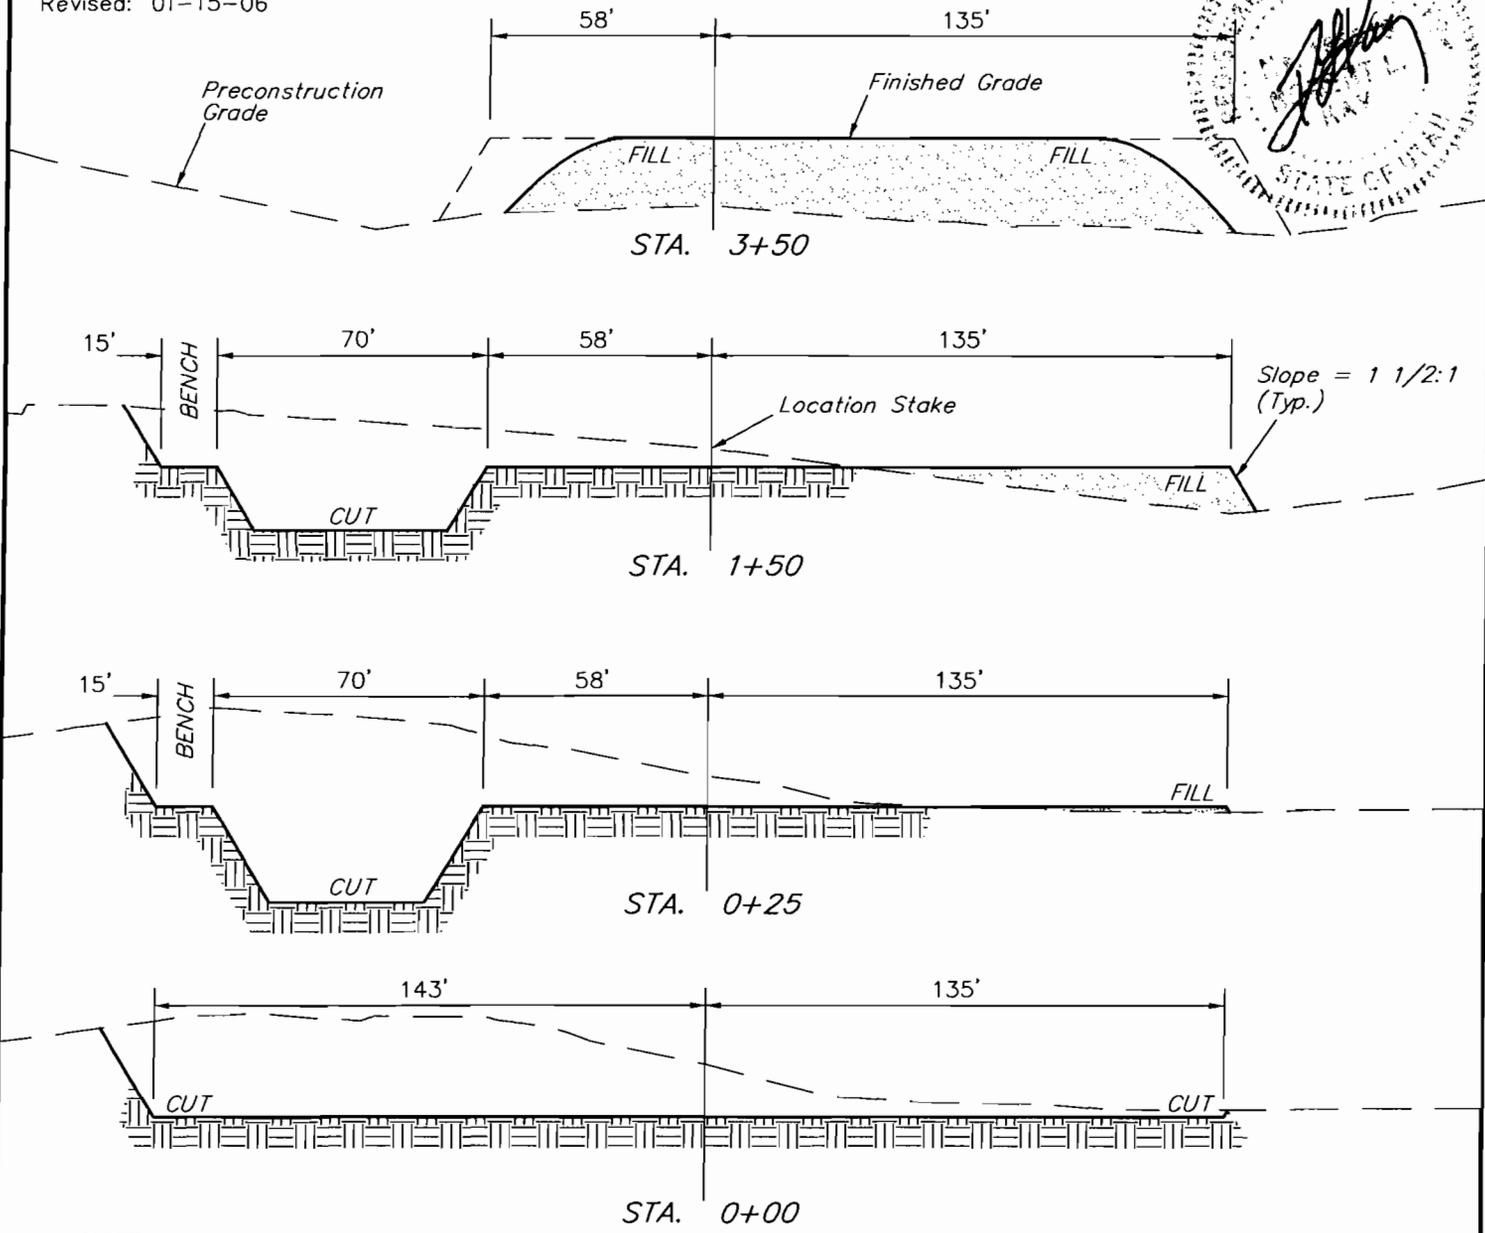

NOTE:

Topsoil should not be Stripped Below Finished Grade on Substructure Area.

*** NOTE:**

FILL QUANTITY INCLUDES 5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,840 Cu. Yds.
Remaining Location	= 9,140 Cu. Yds.
TOTAL CUT	= 10,980 CU.YDS.
FILL	= 7,750 CU.YDS.

EXCESS MATERIAL	= 3,230 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,230 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
 85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 02/14/2006

API NO. ASSIGNED: 43-047-37766

WELL NAME: NBU 1022-16P

OPERATOR: WESTPORT OIL & GAS CO (N2115)

CONTACT: DEBRA DOMENICI

PHONE NUMBER: 435-781-7060

PROPOSED LOCATION:

SESE 16 100S 220E
 SURFACE: 0724 FSL 0973 FEL
 BOTTOM: 0724 FSL 0973 FEL
 COUNTY: UINTAH
 LATITUDE: 39.94362 LONGITUDE: -109.4381
 UTM SURF EASTINGS: 633440 NORTHINGS: 4422457
 FIELD NAME: NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering	DKD	3/14/06
Geology		
Surface		

LEASE TYPE: 3 - State
 LEASE NUMBER: ML-3276
 SURFACE OWNER: 3 - State

PROPOSED FORMATION: WSMVD
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[] Ind[] Sta[] Fee[]
(No. RLB0005236)
- N Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 43-8496)
- N RDCC Review (Y/N)
(Date: _____)
- NA Fee Surf Agreement (Y/N)
- NA Intent to Commingle (Y/N)

LOCATION AND SITING:


- ____ R649-2-3.
- Unit: NATURAL BUTTES
- ____ R649-3-2. General
Siting: 460' From Qtr/Qtr & 920' Between Wells
- ____ R649-3-3. Exception
- Drilling Unit
Board Cause No: 173-14
Eff Date: 12-2-1999
Siting: 460' fr whrg f ncu... Drac
- ____ R649-3-11. Directional Drill

COMMENTS:

Needs Present (02-24-06)

STIPULATIONS:

- 1- OIL SHALE
- 2- STATEMENT OF BASIS
- 3- Surface Csg Cont Stip

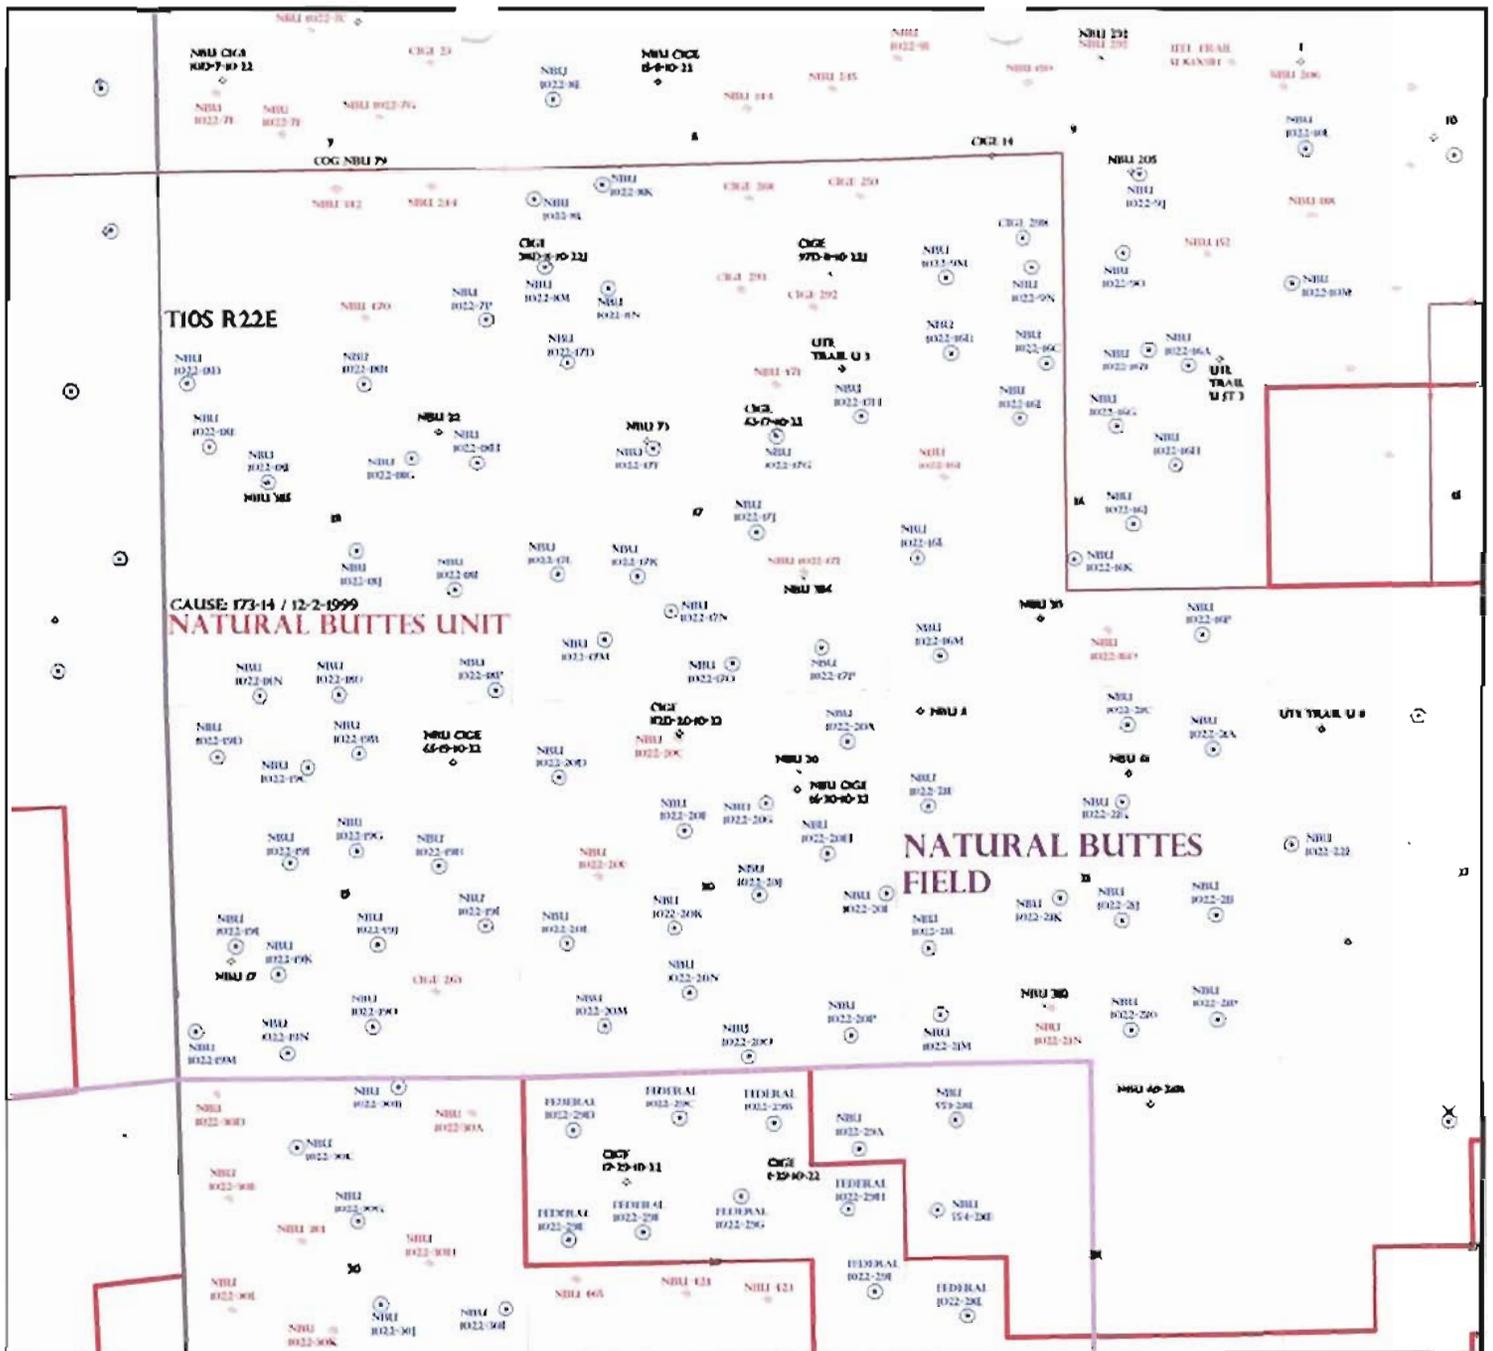

OPERATOR: WESTPORT O&G CO (N2115)

SEC: 16,18,19 T. 10S R. 22E

FIELD: NATURAL BUTTES (630)

COUNTY: UINTAH

CAUSE: 173-14 / 12-2-1999

- Field Status**
- ABANDONED
 - ACTIVE
 - COMBINED
 - INACTIVE
 - PROPOSED
 - STORAGE
 - TERMINATED

- Unit Status**
- EXPLORATORY
 - GAS STORAGE
 - NF PP OIL
 - NF SECONDARY
 - PENDING
 - PI OIL
 - PP GAS
 - PP GEOTHERML
 - PP OIL
 - SECONDARY
 - TERMINATED

- Wells Status**
- GAS INJECTION
 - GAS STORAGE
 - × LOCATION ABANDONED
 - NEW LOCATION
 - PLUGGED & ABANDONED
 - PRODUCING GAS
 - PRODUCING OIL
 - SHUT-IN GAS
 - SHUT-IN OIL
 - TEMP. ABANDONED
 - TEST WELL
 - WATER INJECTION
 - WATER SUPPLY
 - WATER DISPOSAL
 - DRILLING



PREPARED BY: DIANA WHITNEY
DATE: 16-FEBRUARY-2006

**DIVISION OF OIL, GAS AND MINING
APPLICATION FOR PERMIT TO DRILL
STATEMENT OF BASIS**

OPERATOR: Westport Oil & Gas Company, L.P.
WELL NAME & NUMBER: NBU 1022-16P
API NUMBER: 43-047-37766
LOCATION: 1/4,1/4 SE/SE Sec: 16TWP: 10S RNG: 22E ; 724' FSL 973'FEL

Geology/Ground Water:

Westport proposes to set 2,000' of surface casing at this location. The depth to the base of the moderately saline water at this location is estimated to be at a depth of 5,100'. A search of Division of Water Rights records shows no water wells within a 10,000 foot radius of the center of Section 16. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be a significant source of useable ground water. The production casing cement should be brought above the base of the moderately saline groundwater to isolate it from fresher waters uphole.

Reviewer: Brad Hill **Date:** 03/06/06

Surface:

The pre-drill investigation of the surface was performed on February 24, 2006. The site is State surface and State Mineral. The proposed location poses no obvious problems for drilling a well and appears to be the best location for a well in the immediate area.

Ed Bonner and Jim Davis of SITLA and Ben Williams of UDWR were invited to attend the presite on Feb.14, 2006. Mr. Davis and Mr. Williams attended.

Mr. Williams of the UDWR stated that the area is classified as critical yearlong antelope range, however he did not recommend any stipulations, as water is the limiting factor affecting the population not forage. No other wildlife are expected to be affected. He gave Mr. Davis and Mr. Estes copies of his write-up and a DWR recommended seed mix to use on the reserve pit and when closing the location.

This predrill investigation was conducted on a cool sunny day.

Reviewer: Floyd Bartlett **Date:** 02/28/2006 \

Conditions of Approval/Application for Permit to Drill:

1. A synthetic liner with a minimum thickness of 16 mils with a felt sub-liner shall be properly installed and maintained in the reserve pit.

ON-SITE PREDRILL EVALUATION
Division of Oil, Gas and Mining

OPERATOR: Westport Oil & Gas Company, L.P.
WELL NAME & NUMBER: NBU 1022-16P
API NUMBER: 43-047-37766
LEASE: ML-3276 **FIELD/UNIT:** Natural Buttes
LOCATION: 1/4, 1/4 SE/SE Sec: 16 TWP: 10S RNG: 22E ; 724' FSL 973' FEL
LEGAL WELL SITING: 460' from unit boundary and uncommitted tracts.
GPS COORD (UTM): 4422457 Y 0633440 X **SURFACE OWNER:** State of Utah (SITLA)

PARTICIPANTS

Floyd Bartlett (DOGM), Carol Estes (Westport), Clay Einerson (Westport), David Kay and Luke Kay (Uintah Engineering & Land Survey), Jim Davis (SITLA), Ben Williams (Utah Division of Wildlife Resources).

REGIONAL/SETTING TOPOGRAPHY

General area is the north East Bench area of Uintah, County. This area is approximately 36 air miles south of Vernal, Utah and approximately 23 miles southeast of Ouray, Utah. East Bench lies between Sand Wash on the west and Bitter Creek on the East. Access is by State of Utah Highway, Uintah County and oilfield development roads.

Topography is characterized by broad open flats dissected by numerous sub-drainages, which often become steep with ridges and draws with exposed sandstone layers. No perennial streams occur in the area. Individual draws or washes are ephemeral with spring runoff or flows from sometimes-intense summer rainstorms. White River is to the northeast about 4 miles. No springs exist in the area. An occasional constructed pond occurs furnishing water for antelope or livestock.

This site is on the north slope of a ridge, which slopes slightly into a gentle swale. A ridge with outcrops of bedrock occurs to the south. No drainages intersect the location nor are drainage problems expected to occur. Approximately 250 feet of new road will be constructed from an existing road.

SURFACE USE PLAN

CURRENT SURFACE USE: Sheep grazing, limited hunting and recreation.

PROPOSED SURFACE DISTURBANCE: Location of 350' x 193' and a reserve pit of 100' x 150' x 10 feet deep and an additional 15' wide bench. Approximately 250 feet of new road will be required. All material for the location and road will be obtained onsite.

LOCATION OF EXISTING WELLS WITHIN A 1 MILE RADIUS: See attached map from GIS data base.

LOCATION OF PRODUCTION FACILITIES AND PIPELINES: All production

facilities will be on location and added after drilling well. A pipeline 180 feet in length will follow access road.

SOURCE OF CONSTRUCTION MATERIAL: All construction material will be obtained from the site.

ANCILLARY FACILITIES: None will be required.

WILL DRILLING AT THIS LOCATION GENERATE PUBLIC INTEREST CONCERNS? (EXPLAIN). Unlikely, as the general use in the area is oil-field related with numerous other wells in the surrounding area.

WASTE MANAGEMENT PLAN:

Drilled cuttings will be settled into reserve pit. Liquids from pit will be allowed to evaporate. Formation water will be confined to storage tanks. Commercial contractor will handle sewage facilities, storage and disposal. Trash will be contained in trash baskets and hauled to an approved land fill.

ENVIRONMENTAL PARAMETERS

AFFECTED FLOODPLAINS AND/OR WETLANDS: None.

FLORA/FAUNA: A poor desert type vegetation cover consisting of Gardner saltbush, shadscale, big sagebrush, prickly pear and curly mesquite. Antelope, rabbits, small reptiles, birds and mammals. Sheep graze the area in the winter.

SOIL TYPE AND CHARACTERISTICS: Deep sandy loam with fractures angular surface rock.

EROSION/SEDIMENTATION/STABILITY: Little natural erosion. Sedimentation and stability are not a problem and location construction shouldn't cause an increase in stability or erosion problems. No drainages intersect the location.

PALEONTOLOGICAL POTENTIAL: Survey completed by IPC on 10/21/05 and furnished for the file.

RESERVE PIT

CHARACTERISTICS: 100' by 150' and 10' deep. The reserve pit is all within cut on the south east side of the location. A 15' wide bench is planned around the outer edges and 2' of freeboard.

LINER REQUIREMENTS (Site Ranking Form attached): Level 1 sensitivity. A 16 mil liner with a felt pad will be required for the reserve pit.

SURFACE RESTORATION/RECLAMATION PLAN

As per SITLA requirements.

SURFACE AGREEMENT:

As per SITLA requirements.

CULTURAL RESOURCES/ARCHAEOLOGY: Site was surveyed by MOAC on 10/09/05. A copy has been furnished to SITLA.

OTHER OBSERVATIONS/COMMENTS

Ben Williams of the UDWR stated that the area is classified as critical yearlong antelope range, however he did not recommend any stipulations, as water is the limiting factor affecting the population not forage. No other wildlife is expected to be affected.

This predrill investigation was conducted on a cool sunny day.

ATTACHMENTS

Photos of this site were taken and placed on file.

FLOYD BARTLETT
DOGM REPRESENTATIVE

02/24/06; 3:45 PM

DATE/TIME

**Evaluation Ranking Criteria and Ranking Score
For Reserve and Onsite Pit Liner Requirements**

<u>Site-Specific Factors</u>	<u>Ranking</u>	<u>Site Ranking</u>
Distance to Groundwater (feet)		
>200	0	
100 to 200	5	
75 to 100	10	
25 to 75	15	
<25 or recharge area	20	<u>0</u>
Distance to Surf. Water (feet)		
>1000	0	
300 to 1000	2	
200 to 300	10	
100 to 200	15	
< 100	20	
Distance to Nearest Municipal Well (feet)		
>5280	0	
1320 to 5280	5	
500 to 1320	10	
<500	20	<u>0</u>
Distance to Other Wells (feet)		
>1320	0	
300 to 1320	10	
<300	20	<u>10</u>
Native Soil Type		
Low permeability	0	
Mod. permeability	10	
High permeability	20	<u>10</u>
Fluid Type		
Air/mist	0	
Fresh Water	5	
TDS >5000 and <10000	10	
TDS >10000 or Oil Base Mud Fluid	15	
containing significant levels of hazardous constituents	20	<u>5</u>
Drill Cuttings		
Normal Rock	0	
Salt or detrimental	10	<u>0</u>
Annual Precipitation (inches)		
<10	0	
10 to 20	5	
>20	10	<u>0</u>
Affected Populations		
<10	0	
10 to 30	6	
30 to 50	8	
>50	10	<u>0</u>
Presence of Nearby Utility Conduits		
Not Present	0	
Unknown	10	
Present	15	<u>0</u>


Final Score 25 (Level I Sensitivity)

Sensitivity Level I = 20 or more; total containment is required.

Sensitivity Level I = 15-19; lining is discretionary.

Sensitivity Level II = below 15; no specific lining is required.

Casing Schematic

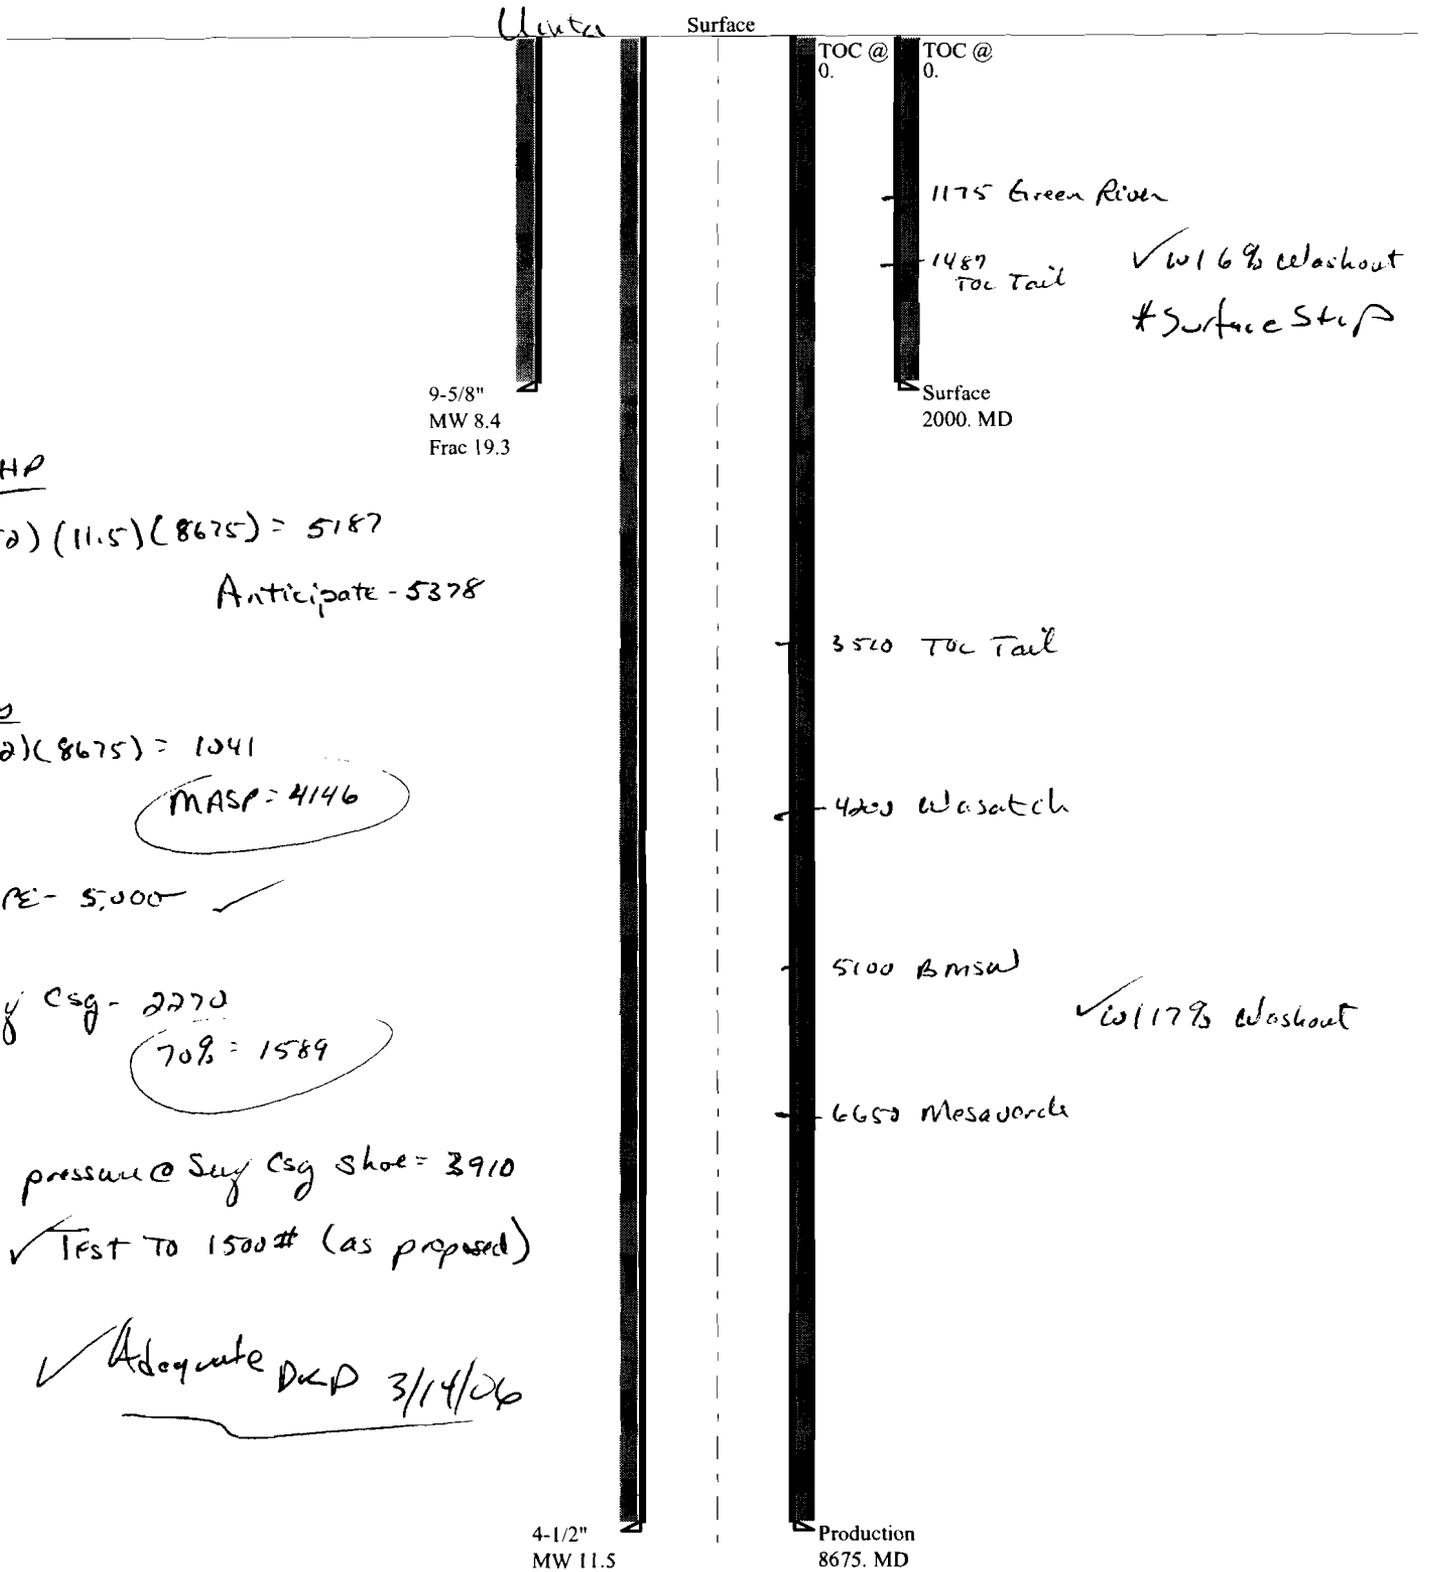

BHP

$(0.52)(11.5)(8675) = 5187$

Anticipate - 5378

Gas

$(.12)(8675) = 1041$

MASP = 4146

BORE - 5,000 ✓

Say csg - 2270

70% = 1589

Max pressure @ Say csg shoe = 3910

✓ Test to 1500# (as proposed)

✓ Adequate DWD 3/14/06

Well name:

03-06 Westport NBU 1022-16P

Operator: **Westport Oil & Gas**

String type: **Surface**

Project ID:
43-047-37766

Location: **Uintah County, Utah**

Design parameters:

Collapse

Mud weight: 8.400 ppg
Design is based on evacuated pipe.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Environment:

H2S considered? No
Surface temperature: 75 °F
Bottom hole temperature: 103 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 1,500 ft

Cement top: Surface

Burst

Max anticipated surface pressure: 1,760 psi
Internal gradient: 0.120 psi/ft
Calculated BHP 2,000 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)

Tension is based on buoyed weight.
Neutral point: 1,753 ft

Non-directional string.

Re subsequent strings:

Next setting depth: 8,675 ft
Next mud weight: 11.500 ppg
Next setting BHP: 5,182 psi
Fracture mud wt: 19.250 ppg
Fracture depth: 2,000 ft
Injection pressure 2,000 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	2000	9.625	32.30	H-40	ST&C	2000	2000	8.876	126.8

Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	873	1370	1.570	2000	2270	1.14	57	254	4.49 J

Prepared by: Clinton Dworshak
Utah Div. of Oil & Mining

Phone: (810) 538-5280
FAX: (801) 359-3940

Date: March 7, 2006
Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 2000 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:	03-06 Westport NBU 1022-16P	
Operator:	Westport Oil & Gas	Project ID:
String type:	Production	43-047-37766
Location:	Uintah County, Utah	

Design parameters:

Collapse

Mud weight: 11.500 ppg
Design is based on evacuated pipe.

Burst

Max anticipated surface pressure: 4,141 psi
Internal gradient: 0.120 psi/ft
Calculated BHP: 5,182 psi

No backup mud specified.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Tension:

8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)

Tension is based on buoyed weight.
Neutral point: 7,184 ft

Environment:

H2S considered? No
Surface temperature: 75 °F
Bottom hole temperature: 196 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 1,500 ft

Cement top: Surface

Non-directional string.

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	8675	4.5	11.60	M-80	LT&C	8675	8675	3.875	201.1
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	5182	6350	1.225	5182	7780	1.50	83	267	3.20 B

Prepared by: Clinton Dworshak
Utah Div. of Oil & Mining

Phone: (810) 538-5280
FAX: (801) 359-3940

Date: March 7, 2006
Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 8675 ft, a mud weight of 11.5 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

From: Ed Bonner
To: Whitney, Diana
Date: 2/22/2006 4:16:52 PM
Subject: Well Clearance

The following wells have been given cultural resource clearance by the Trust Lands Cultural Resources Group:

Newfield Production Company

- Gilsonite State G-32-8-17
- Gilsonite State H-32-8-17
- Gilsonite State M-32-8-17
- Gilsonite State N-32-8-17
- Gilsonite State Q-32-8-17
- Castle Draw State G-2-9-17
- Monument Butte State I-36-8-16
- Monument Butte State L-36-8-16
- Monument Butte State S-36-8-16

Westport Oil & Gas Company

- NBU 1022-16J
- NBU 1022-16L
- NBU 1022-16P
- NBU 1022-18B
- NBU 1022-18D
- NBU 1022-18E
- NBU 1022-18G
- NBU 1022-18H
- NBU 1022-18I
- NBU 1022-18J
- NBU 1022-18N
- NBU 1022-18O
- NBU 1022-18P

If you have any questions regarding this matter please give me a call.

CC: Davis, Jim; Garrison, LaVonne; Hill, Brad; Hunt, Gil

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:
3160
(UT-922)

March 2, 2006

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2006 Plan of Development Natural Buttes Unit Uintah
County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2006 within the Natural Buttes Unit, Uintah County, Utah.

API #	WELL NAME	LOCATION
(Proposed PZ Wasatch-MesaVerde)		
43-047-37738	NBU 1022-19F	Sec 19 T10S R22E 2239 FNL 1622 FWL
43-047-37739	NBU 1022-19D	Sec 19 T10S R22E 0732 FNL 0640 FWL
43-047-37740	NBU 1022-19C	Sec 19 T10S R22E 0896 FNL 1891 FWL
43-047-37765	NBU 1022-16J	Sec 16 T10S R22E 2302 FSL 1901 FEL
43-047-37766	NBU 1022-16P	Sec 16 T10S R22E 0724 FSL 0973 FEL
43-047-37767	NBU 1022-16L	Sec 16 T10S R22E 1904 FSL 0343 FWL
43-047-37768	NBU 1022-18H	Sec 18 T10S R22E 1947 FNL 0465 FEL
43-047-37769	NBU 1022-18G	Sec 18 T10S R22E 1870 FNL 1383 FEL
43-047-37770	NBU 1022-18I	Sec 18 T10S R22E 1592 FSL 0803 FEL
43-047-37771	NBU 1022-18E	Sec 18 T10S R22E 1656 FNL 0606 FWL
43-047-37772	NBU 1022-18J	Sec 18 T10S R22E 2158 FSL 2171 FEL
43-047-37773	NBU 1022-18N	Sec 18 T10S R22E 0125 FSL 1249 FWL
43-047-37774	NBU 1022-18B	Sec 18 T10S R22E 0818 FNL 2040 FEL
43-047-37775	NBU 1022-18P	Sec 18 T10S R22E 0169 FSL 0249 FEL
43-047-37776	NBU 1022-18D	Sec 18 T10S R22E 0765 FNL 0311 FWL
43-047-37777	NBU 1022-18O	Sec 18 T10S R22E 0134 FSL 2445 FEL
43-047-37783	NBU 1022-19K	Sec 19 T10S R22E 1509 FSL 1427 FWL
43-047-37778	NBU 1022-19H	Sec 19 T10S R22E 2298 FNL 1086 FEL
43-047-37779	NBU 1022-19B	Sec 19 T10S R22E 0696 FNL 2180 FEL
43-047-37780	NBU 1022-19G	Sec 19 T10S R22E 2069 FNL 2241 FEL
43-047-37781	NBU 1022-19I	Sec 19 T10S R22E 2135 FSL 0460 FEL
43-047-37782	NBU 1022-19O	Sec 19 T10S R22E 0740 FSL 2065 FEL
43-047-37734	NBU 1021-27E	Sec 27 T10S R21E 1862 FNL 0535 FWL
43-047-37728	NBU 1021-28G	Sec 28 T10S R21E 1952 FNL 1971 FEL
43-047-37721	NBU 1021-13C	Sec 13 T10S R21E 0576 FNL 1772 FWL
43-047-37722	NBU 1021-13A	Sec 13 T10S R21E 0651 FNL 1311 FEL

Page 2

43-047-37723	NBU 1021-13G	Sec 13	T10S	R21E	1444	FNL	2651	FEL
43-047-37724	NBU 1021-13K	Sec 13	T10S	R21E	1935	FSL	1486	FWL
43-047-37725	NBU 1021-13I	Sec 13	T10S	R21E	2353	FSL	0668	FEL
43-047-37727	NBU 1021-13O	Sec 13	T10S	R21E	0777	FSL	1573	FEL
43-047-37761	NBU 920-20P	Sec 20	T09S	R20E	0769	FSL	0978	FEL
43-047-37760	NBU 920-20O	Sec 20	T09S	R20E	0842	FSL	1913	FEL
43-047-37759	NBU 920-20N	Sec 20	T09S	R20E	0803	FSL	1885	FWL
43-047-37758	NBU 920-20M	Sec 20	T09S	R20E	0630	FSL	0838	FWL
43-047-37757	NBU 920-20L	Sec 20	T09S	R20E	2104	FSL	0827	FWL
43-047-37756	NBU 920-20J	Sec 20	T09S	R20E	1466	FSL	1653	FEL
43-047-37755	NBU 920-20I	Sec 20	T09S	R20E	1955	FSL	0717	FEL
43-047-37732	NBU 920-22E	Sec 22	T09S	R20E	2009	FNL	0756	FWL
43-047-37764	NBU 920-24M	Sec 24	T09S	R20E	0614	FSL	0851	FWL
43-047-37753	NBU 920-14M	Sec 14	T09S	R20E	0536	FSL	0612	FWL
43-047-37754	NBU 920-14N	Sec 14	T09S	R20E	0732	FSL	1805	FWL

This office has no objection to permitting the wells at this time.

/s/ Michael L. Coulthard

bcc: File – Natural Buttes Unit
Division of Oil Gas and Mining
Central Files



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

March 15, 2006

Westport Oil & Gas Company, LP
1368 S 1200 E
Vernal, UT 84078

Re: Natural Buttes Unit 1022-16P Well, 724' FSL, 973' FEL, SE SE, Sec. 16,
T. 10 South, R. 22 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-37766.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
SITLA
Bureau of Land Management, Vernal District Office

Operator: Westport Oil & Gas Company, LP
Well Name & Number Natural Buttes Unit 1022-16P
API Number: 43-047-37766
Lease: ML-3276

Location: SE SE **Sec.** 16 **T.** 10 South **R.** 22 East

Conditions of Approval

1. **General**

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. **Notification Requirements**

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- 24 hours prior to cementing or testing casing
- 24 hours prior to testing blowout prevention equipment
- 24 hours prior to spudding the well
- within 24 hours of any emergency changes made to the approved drilling program
- prior to commencing operations to plug and abandon the well

The following are Division of Oil, Gas and Mining contacts and their work telephone numbers (please leave a voice mail message if the person is not available to take the call):

- Dan Jarvis at (801) 538-5338
- Carol Daniels at (801) 538-5284 (spud)

3. **Reporting Requirements**

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. Compliance with the State of Utah Antiquities Act forbids disturbance of archeological, historical, or paleontological remains. Should archeological, historical or paleontological remains be encountered during your operations, you are required to immediately suspend all operations and immediately inform the Trust Lands Administration and the Division of State History of the discovery of such remains.

5. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)

6. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

7. Surface casing shall be cemented to the surface.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-3276
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES UNIT
2. NAME OF OPERATOR: WESTPORT OIL & GAS COMPANY L.P.		8. WELL NAME and NUMBER: NBU 1022-16P
3. ADDRESS OF OPERATOR: 1368 S. 1200 E. CITY VERNAL STATE UT ZIP 84078		9. API NUMBER: 4304737766
4. LOCATION OF WELL FOOTAGES AT SURFACE: 724'FSL, 973'FEL		10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 16 10S 22E		COUNTY: UINTAH
		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>PIPELINE CHANGE</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

THE OPERATOR REQUESTS AUTHORIZATION TO AMEND THE PIPELINE ROUTE PROPOSED IN THE APD. THE OPERATOR PROPOSES TO RUN APPROXIMATELY 1300' +/- OF 4" HIGH PRESSURE PIPELINE AND APPROXIMATELY 180' +/- OF LOW PRESSURE PIPELINE FROM THE PROPOSED LOCATION TO THE TIE-IN POINT OF THE JUNCTION TO THE EXISTING PIPELINE.


PLEASE REFER TO THE ATTACHED CHRONOLOGICAL WELL HISTORY.

NAME (PLEASE PRINT) <u>SHEILA UPCHEGO</u>	TITLE <u>REGULATORY ANALYST</u>
SIGNATURE	DATE <u>4/5/2006</u>

(This space for State use only)

**Accepted by the
Utah Division of
Oil, Gas and Mining
For Record Only**

RECEIVED
APR 12 2006
DIV. OF OIL, GAS & MINING

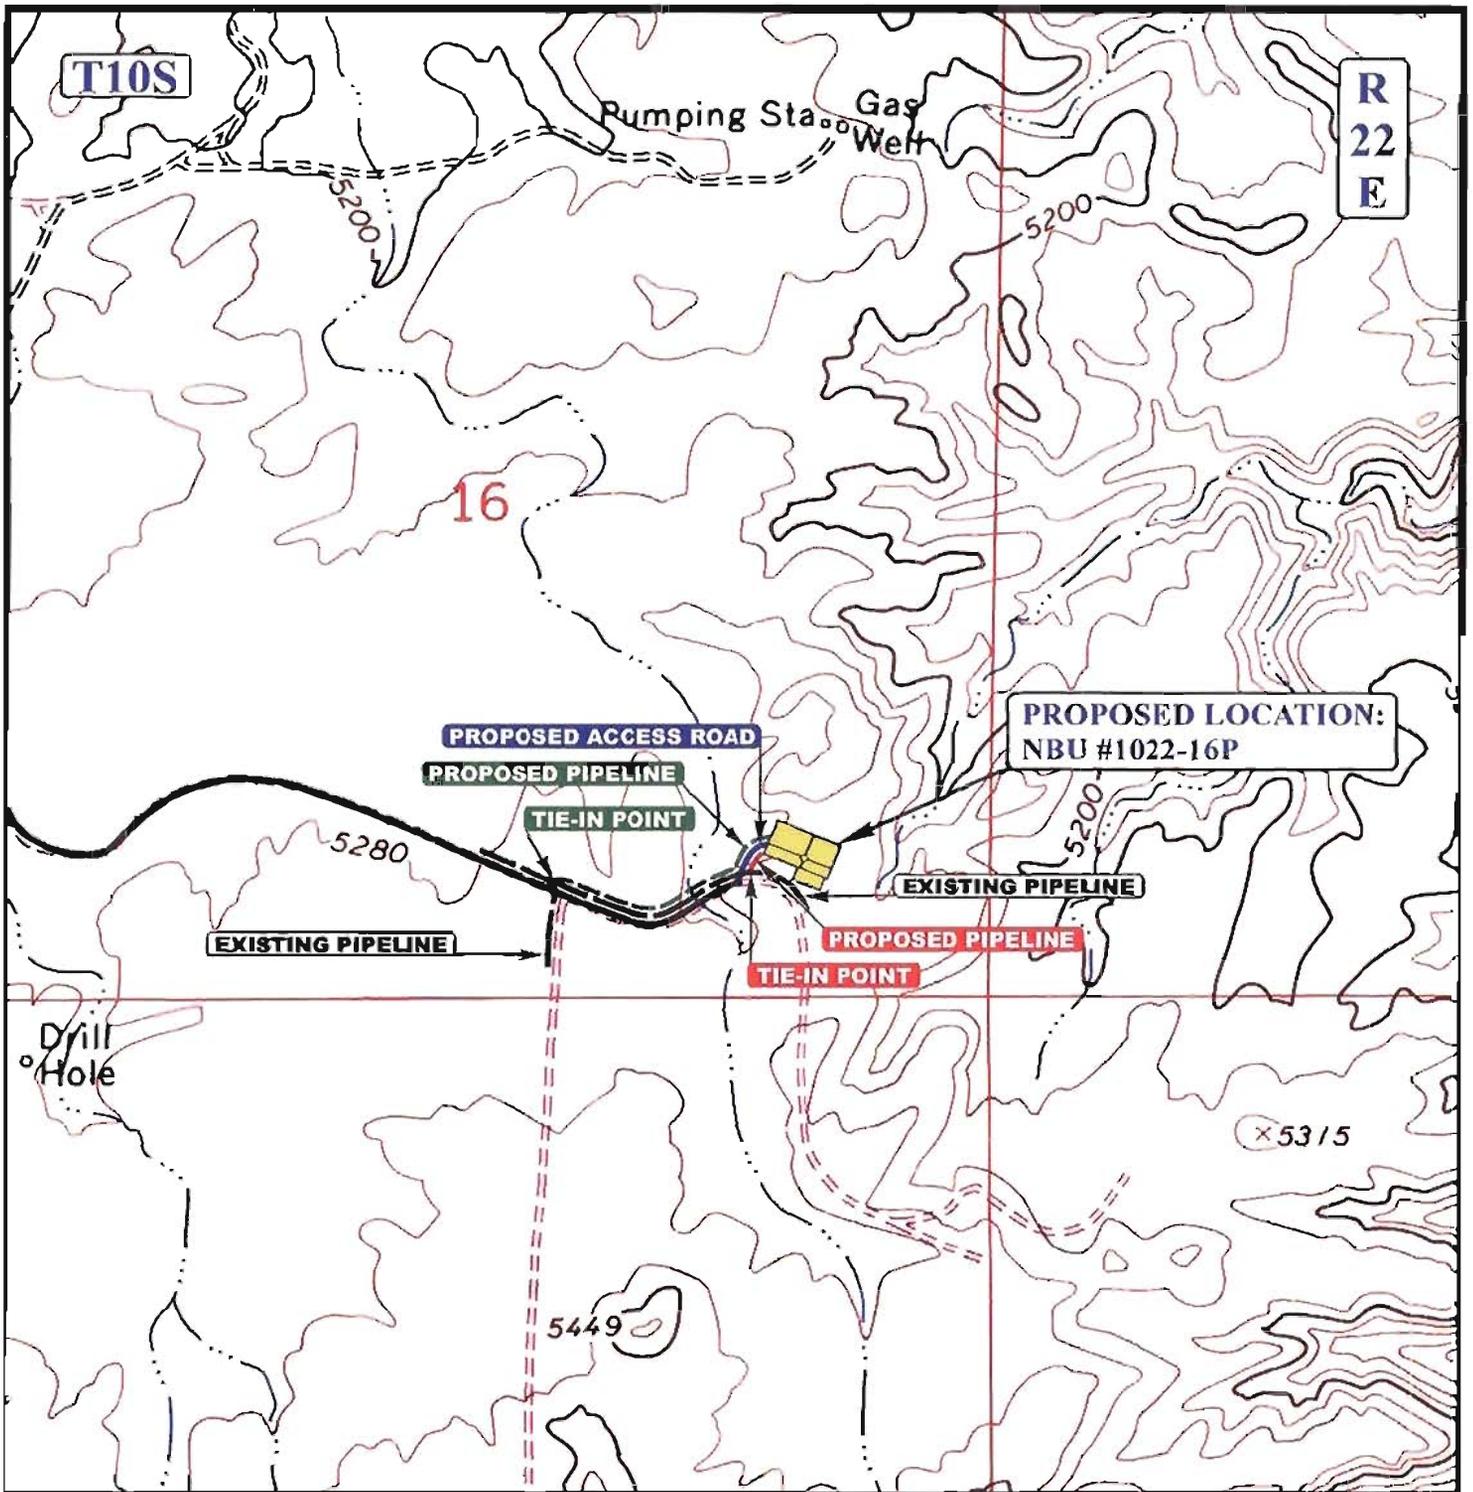

APPROXIMATE TOTAL HIGH-PRESSURE PIPELINE DISTANCE = 1,300' +/-

APPROXIMATE TOTAL LOW-PRESSURE PIPELINE DISTANCE = 180' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- PROPOSED LOW-PRESSURE PIPELINE
- PROPOSED HIGH-PRESSURE PIPELINE



Kerr-McGee Oil & Gas Onshore LP

NBU #1022-16P

SECTION 16, T10S, R22E, S.L.B.&M.

724' FSL 973' FEL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**

01	15	06
MONTH	DAY	YEAR



SCALE: 1" = 1000' DRAWN BY: C.P. REVISED: 03-27-06

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING

1. DJJ
2. CDW

X Change of Operator (Well Sold)

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

1/6/2006

FROM: (Old Operator): N2115-Westport Oil & Gas Co., LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024	TO: (New Operator): N2995-Kerr-McGee Oil & Gas Onshore, LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024
---	--

WELL NAME	CA No.	Unit:	NATURAL BUTTES UNIT					
	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 5/10/2006
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 5/10/2006
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- If **NO**, the operator was contacted on:
- (R649-9-2) Waste Management Plan has been received on: IN PLACE
- Inspections of LA PA state/fee well sites complete on: n/a 3 LA wells & all PA wells transferred
- Reports current for Production/Disposition & Sundries on: ok

6. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 3/27/2006 BIA not yet

7. **Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: 3/27/2006

8. **Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: n/a

9. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on:

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 5/15/2006
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 5/15/2006
- Bond information entered in RBDMS on: 5/15/2006
- Fee/State wells attached to bond in RBDMS on: 5/16/2006
- Injection Projects to new operator in RBDMS on: _____
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a Name Change Only

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: CO1203
- Indian well(s) covered by Bond Number: RLB0005239
- (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0005236
- The **FORMER** operator has requested a release of liability from their bond on: n/a rider added KMG
The Division sent response by letter on: _____

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 5/16/2006

COMMENTS:

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
KERR-McGEE OIL & GAS ONSHORE LP

3a. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEE ATTACHED

5. Lease Serial No.
MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State
UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

PLEASE BE ADVISED THAT KERR-McGEE OIL & GAS ONSHORE LP, IS CONSIDERED TO BE THE OPERATOR OF THE ATTACHED WELL LOCATIONS. EFFECTIVE JANUARY 6, 2006. KERR-McGEE OIL & GAS ONSHORE LP, IS RESPONSIBLE UNDER TERMS AND CONDITIONS OF THE LEASE(S) FOR THE OPERATIONS CONDUCTED UPON LEASE LANDS. BOND COVERAGE IS PROVIDED BY STATE OF UTAH NATIONWIDE BOND NO. RLB0005237.

RECEIVED

MAY 10 2006

DIV. OF OIL, GAS & MINING

*BLM BOND = C01203
BIA BOND = RLB0005239*

APPROVED 5116106

Earlene Russell

**Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician**

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) RANDY BAYNE	Title DRILLING MANAGER
Signature <i>Randy Bayne</i>	Date May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

MULTIPLE LEASES

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

WESTPORT OIL & GAS COMPANY L.P.

3a. Address

1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7024

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

SEE ATTACHED

8. Well Name and No.

MUTIPLE WELLS

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State

UINTAH COUNTY, UTAH

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other CHANGE OF OPERATOR

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

EFFECTIVE JANUARY 6, 2006, WESTPORT OIL & GAS COMPANY L.P., HAS RELINQUISHED THE OPERATORSHIP OF THE ATTACHED WELL LOCATIONS TO KERR-McGEE OIL & GAS ONSHORE LP.

APPROVED 5/16/06
Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

RECEIVED
MAY 10 2006

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

BRAD LANEY

Title

ENGINEERING SPECIALIST

Signature

Date

May 9, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Brad Laney

Title

Date

5-9-06

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-3276
2. NAME OF OPERATOR: Kerr McGee Oil and Gas Onshore LP		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: NATURAL BUTTES
3. ADDRESS OF OPERATOR: 1368 S. 1200 E. CITY VERNAL STATE UT ZIP 84078		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
PHONE NUMBER: (435) 781-7003		8. WELL NAME and NUMBER: NBU 1022-16P
4. LOCATION OF WELL FOOTAGES AT SURFACE: 724' FSL 973' FEL COUNTY: UINTAH		9. API NUMBER: 4304737766
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 16 10S 22E STATE: UTAH		10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>APD EXTENSION</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

THE OPERATOR REQUESTS AUTHORIZATION FOR A ONE YEAR EXTENSION FOR THE SUBJECT WELL LOCATION SO THAT THE DRILLING OPERATIONS MAY BE COMPLETED. THE ORIGINAL APD WAS APPROVED BY THE DIVISION OF OIL, GAS AND MINING ON MARCH 15, 2006.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 02-21-07
By: [Signature]

COPY SENT TO OPERATOR
Date: 2-22-07
Initials: [Signature]

NAME (PLEASE PRINT) <u>RAMEY HOOPES</u>	TITLE <u>REGULATORY CLERK</u>
SIGNATURE <u>[Signature]</u>	DATE <u>2/12/2007</u>

(This space for State use only)

RECEIVED
FEB 20 2007

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304737766
Well Name: NBU 1022-16P
Location: SESE, SEC 16-T10S-R22E
Company Permit Issued to: KERR MCGEE OIL AND GAS ONSHORE LP
Date Original Permit Issued: 3/15/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

Ramey Hooper
Signature

2/12/2007
Date

Title: Regulatory Clerk

Representing: Kerr McGee Oil & Gas Onshore LP

RECEIVED
FEB 20 2007
DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-3276
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME: UNIT #891008900A
2. NAME OF OPERATOR: KERR MCGEE OIL & GAS ONSHORE LP		8. WELL NAME and NUMBER: NBU 1022-16P
3. ADDRESS OF OPERATOR: 1368 SOUTH 1200 EAST CITY VERNAL STATE UT ZIP 84078		9. API NUMBER: 4304737766
PHONE NUMBER: (435) 781-7024		10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL FOOTAGES AT SURFACE: 724'FSL, 973'FEL		COUNTY: UINTAH
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 16 10S 22E		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>DOGM APD</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	<u>EXTENSION</u>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

THE OPERATOR REQUESTS AUTHORIZATION FOR A ONE YEAR EXTENSION FOR THE SUBJECT WELL LOCATION. SO THAT THE DRILLING OPERATIONS MAY BE COMPLETED. THE ORIGINAL APD WAS APPROVED BY THE DIVISION OF OIL, GAS AND MINING ON MARCH 15, 2006.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 02-25-08
By: [Signature]

COPY SENT TO OPERATOR
Date: 2-26-2008
Initials: KS

NAME (PLEASE PRINT) SHEILA UPCHEGO	TITLE SENIOR LAND ADMIN SPECIALIST
SIGNATURE <u>[Signature]</u>	DATE 2/6/2008

(This space for State use only)

RECEIVED
FEB 25 2008

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304737766
Well Name: NBU 1022-16P
Location: SE/SE SEC. 16, T10S, R22E
Company Permit Issued to: WESTPORT OIL & GAS COMPANY
Date Original Permit Issued: 3/15/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No


Signature

2/6/2008

Date

Title: SENOIR LAND ADMIN SPECIALIST

Representing: KERR-McGEE OIL & GAS ONSHORE LP

RECEIVED

FEB 25 2008

DIV. OF OIL, GAS & MINING



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

February 26, 2009

Kerr McGee O&G Onshore LP
1368 South 1200 East
Vernal, UT 84078

Re: APD Rescinded – NBU 1022-16P, Sec. 16 T. 10S, R. 22E
Uintah County, Utah API No. 43-047-37766

Ladies and Gentlemen:

The Application for Permit to Drill (APD) for the subject well was approved by the Division of Oil, Gas and Mining (Division) on March 15, 2006. On February 21, 2007 and on February 25, 2008, the Division granted a one-year APD extension. No drilling activity at this location has been reported to the division. Therefore, approval to drill the well is hereby rescinded, effective February 25, 2009.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
SITLA, Ed Bonner

