

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**APPLICATION FOR PERMIT TO DRILL OR REENTER**

1a. Type of Work:  DRILL  REENTER

1b. Type of Well:  Oil Well  Gas Well  Other  Single Zone  Multiple Zone

5. Lease Serial No.  
**U-0282**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA Agreement, Name and No.  
**CHAPITA WELLS UNIT**

8. Lease Name and Well No.  
**CHAPITA WELLS UNIT 924-23**

2. Name of Operator  
**EOG RESOURCES, INC.**

9. API Well No.  
**43-047-37845**

3a. Address **P.O. BOX 1815  
VERNAL, UT 84078**

3b. Phone No. (Include area code)  
**(435)789-0790**

10. Field and Pool, or Exploratory  
**NATURAL BUTTES**

4. Location of Well (Report location clearly and in accordance with any State requirements. \*)

At surface **1812' FSL, 2032' FEL** *630177X 40, 017257* NW/SE

At proposed prod. Zone *44309047 109.40403*

11. Sec., T., R., M., or Blk. and Survey or Area  
**SEC. 23, T9S, R22E,  
S.L.B.&M.**

14. Distance in miles and direction from nearest town or post office\*  
**18.3 MILES SOUTHEAST OF OURAY, UTAH**

12. County or Parish  
**UINTAH**

13. State  
**UTAH**

15. Distance from proposed\* location to nearest property or lease line, ft. **1812'**  
(Also to nearest drig. Unit line, if any)

16. No. of Acres in lease  
**2440**

17. Spacing Unit dedicated to this well

18. Distance from proposed location\* to nearest well, drilling, completed, applied for, on this lease, ft. See Topo Map C

19. Proposed Depth  
**9475'**

20. BLM/BIA Bond No. on file  
**NM-2308**

21. Elevations (Show whether DF, KDB, RT, GL, etc.)  
**5010.2 FEET GRADED GROUND**

22. Approximate date work will start\*  
**UPON APPROVAL**


23. Estimated duration  
**45 DAYS**

24. Attachments

**Attachments**

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:


- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification.
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature 

Title  
**Agent**

Name (Printed/Typed)  
**Ed Trotter**

Date  
**February 15, 2006**

Approved by (Signature) 

Title

Name (Printed/Typed)  
**BRADLEY G. HILL  
ENVIRONMENTAL MANAGER**

Date  
**03-07-06**

Office


Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of Approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

# T9S, R22E, S.L.B.&M.

EOG RESOURCES, INC.

Well location, CWU #924-23, located as shown in the NW 1/4 SE 1/4 of Section 23, T9S, R22E, S.L.B.&M. Uintah County, Utah.

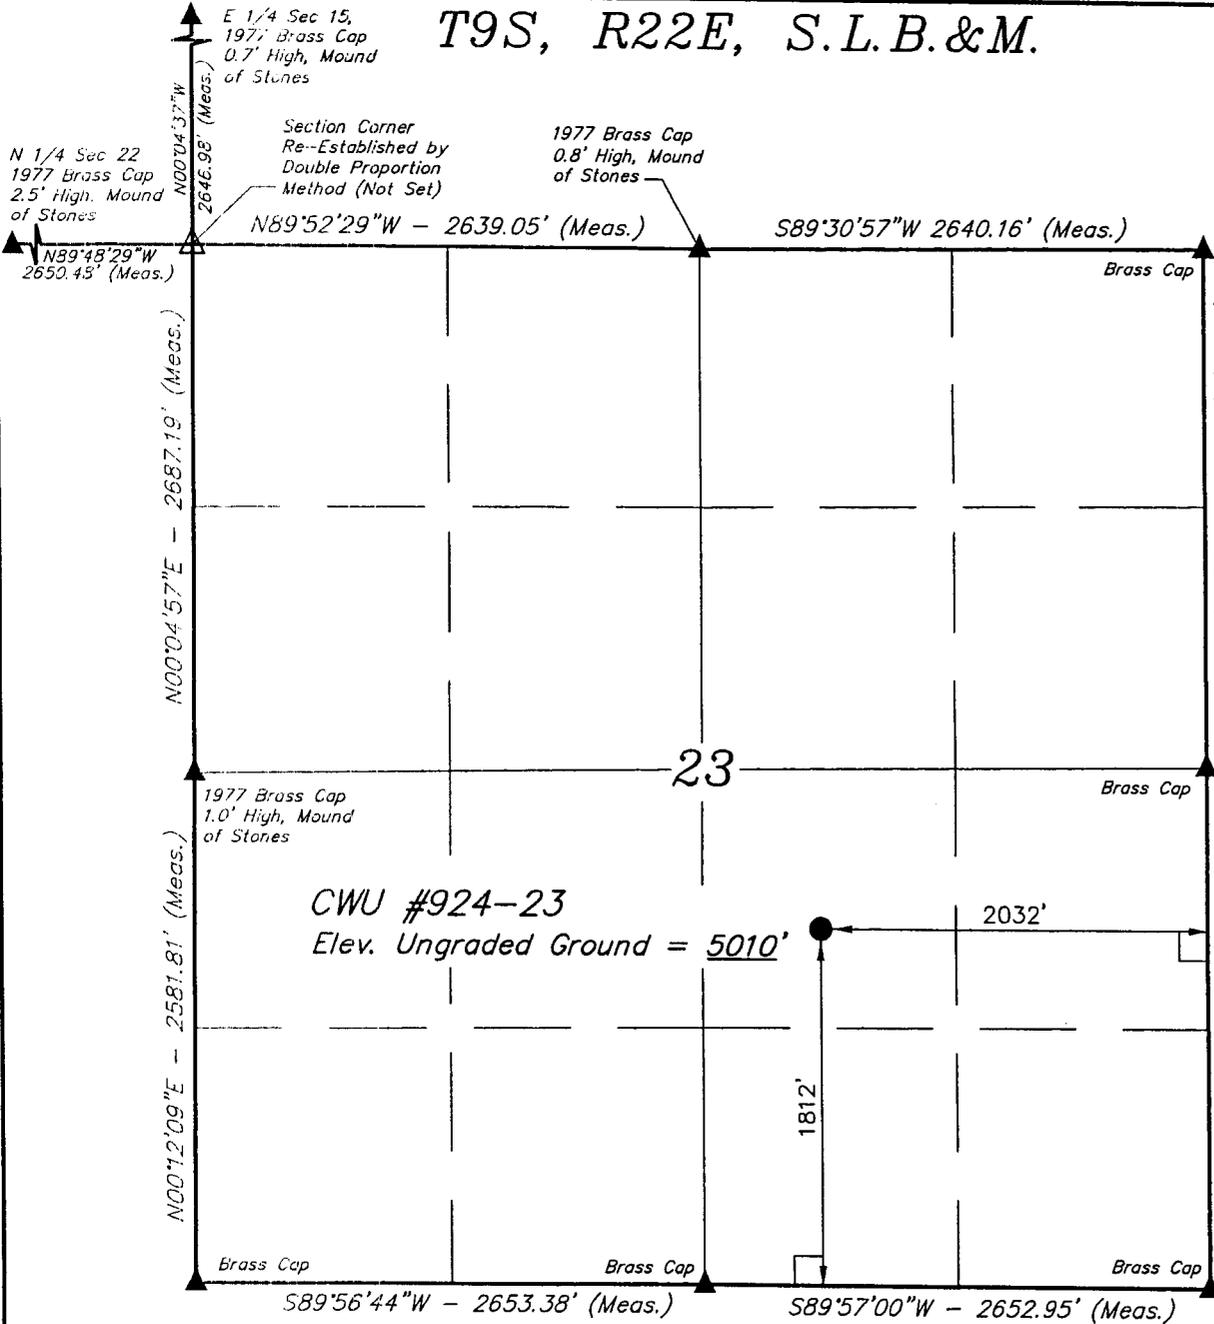


## BASIS OF ELEVATION

BENCH MARK 20EAM LOCATED IN THE SE 1/4 OF SECTION 35, T8S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4697 FEET.

## BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

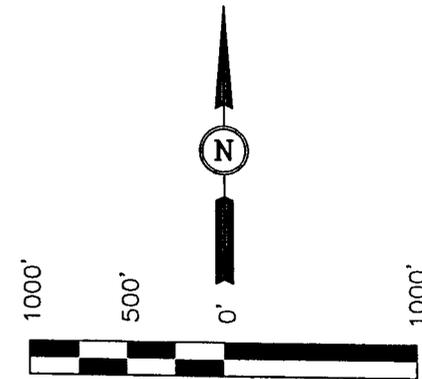

SCALE  
CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

*Robert A. Key*  
REGISTERED LAND SURVEYOR  
REGISTRATION NO. 161319  
STATE OF UTAH

**UINTAH ENGINEERING & LAND SURVEYING**  
85 SOUTH 200 EAST - VERNAL, UTAH 84078  
(435) 789-1017

### LEGEND:

- └─┘ = 90° SYMBOL
  - = PROPOSED WELL HEAD.
  - ▲ = SECTION CORNERS LOCATED.
  - △ = SECTION CORNERS RE-ESTABLISHED. (Not Set On Ground)
- (NAD 27)
- LATITUDE = 40°01'09.29" (40.019247)  
LONGITUDE = 109°24'15.64" (109.404344)

SCALE 1" = 1000'	DATE SURVEYED: 08-19-04	DATE DRAWN: 08-23-04
PARTY G.S. W.L. D.COX	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE EOG RESOURCES, INC.	

**EIGHT POINT PLAN**  
**CHAPITA WELL UNIT 924-23**  
**NW/SE, SEC. 23, T9S, R22E, S.L.B.&M.**  
**UINTAH COUNTY, UTAH**

**1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:**

<b>FORMATION</b>	<b>DEPTH (KB)</b>
Green River FM	1,747'
Wasatch	4,729'
North Horn	6,656'
Island	6,996'
KMV Price River	7,143'
KMV Price River Middle	7,985'
KMV Price River Lower	8,806'
Sego	9,273'

Estimated TD: **9,475' or 200'± below Sego top**

**Anticipated BHP: 5,175 Psig**

1. Fresh Waters may exist in the upper, approximately 1,000 ft ± of the Green River Formation, with top at about 2,000 ft ±.
2. Cement isolation is installed to surface of the well isolating all zones by cement.

**3. PRESSURE CONTROL EQUIPMENT:**

Production Hole – 5000 Psig  
 BOP schematic diagrams attached.

**4. CASING PROGRAM:**

	<u>HOLE SIZE</u>	<u>INTERVAL</u>	<u>SIZE</u>	<u>WEIGHT</u>	<u>GRADE</u>	<u>THREAD</u>	<u>RATING FACTOR</u>		
							<u>COLLAPSE</u>	<u>BURST</u>	<u>TENSILE</u>
<b>Conductor:</b>	17 ½"	0' – 45'	13 ¾"	48.0#	H-40	STC	770 PSI	1730 PSI	322,000#
<b>Surface</b>	12-1/4"	45' – 2,300'KB±	9-5/8"	36.0#	J-55	STC	2020 PSI	3520 Psi	394,000#
<b>Production:</b>	7-7/8"	2,300'± – TD	4-½"	11.6#	N-80	LTC	6350 PSI	7780 Psi	223,000#

**Note:** 12-¼" surface hole will be drilled to a total depth of 200'± below the base of the Green River lost circulation zone and cased w/9-5/8" as shown to that depth. Drilled depth may be shallower or deeper than the 2300' shown above depending on the actual depth of the loss zone. **All casing will be new or inspected.**

**5. Float Equipment:**

**Surface Hole Procedure (0' - 2300'±)**

Guide Shoe

Insert Float Collar (PDC drillable)

Centralizers: 1-5' above shoe, top of jts. #2 and #3 then every 5<sup>th</sup> joint to surface. (15 total)

**EIGHT POINT PLAN**  
**CHAPITA WELL UNIT 924-23**  
**NW/SE, SEC. 23, T9S, R22E, S.L.B.&M.**  
**UINTAH COUNTY, UTAH**

**Float Equipment: (Cont'd)**

**Production Hole Procedure (2300'± - TD):**

Float shoe, 1 joint casing, float collar and balance of casing to surface. 4-½", 11.6#, N-80 or equivalent marker collars or short casing joints to be placed at top of Price River and 400' above top of Wasatch. Centralizers to be placed 5' above shoe on joint #1, top of joint #2, and every 2nd joint to 400' above Wasatch Island top. (30± total). Thread lock float shoe, top and bottom of float collar, and top of 2<sup>nd</sup> joint.

**6. MUD PROGRAM**

**Surface Hole Procedure (Surface - 2300'±):**

Air/air mist or aerated water.

**Production Hole Procedure (2300'± - TD):** Anticipated mud weight 9.5 – 10.5 ppg depending on actual wellbore conditions encountered while drilling.

**2300'± - TD** A closed mud system will be utilized. A bentonite gelled water mud system will be used to control viscosity w/PHPA polymer used for supplemental viscosity and clay encapsulation/inhibition. Water loss will be maintained at <15cc's using white starch or PAC. Bactericides will be used as needed. Anticipated pH will range from 9.0-10.0. Mud weight will be adjusted as necessary for well control. Deflocculants/thinners will be used as necessary to maintain mud quality. LCM sweeps will be utilized as necessary to control lost circulation and mud loss. CO2 contamination, if encountered, will be treated with lime and gypsum.

**7. VARIANCE REQUESTS:**

**Reference: Onshore Oil and Gas Order No. 2 – Item E: Special Drilling Operations**

EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. Due to reduce location excavation, the blooie line will be approximately 75' in length

**8. EVALUATION PROGRAM:**

**Logs:** Mud log from base of surface casing to TD.

**Cased-hole Logs:** Cased-hole logs will be run in lieu of open-hole logs consisting of the following:  
**Cement Bond / Casing Collar Locator and Pulsed Neutron**

**9. CEMENT PROGRAM:**

**Surface Hole Procedure (Surface - 2300'±):**

**Lead:** Class "G" cement with 16% Gel, 10 #/sx Gilsonite, 3% Salt, 2% CaCl<sub>2</sub>, 3 lb/sx GR3 ¼ #/sx Flocele mixed at 11 ppg, 3.82 ft<sup>3</sup>/sk. yield. 23 gps water.

**Tail:** Class "G" cement with 2% CaCl<sub>2</sub>, ¼#/sk Flocele mixed at 15.6 ppg. 1.18 ft<sup>3</sup>/sk.. 5.2 gps water.

**EIGHT POINT PLAN**  
**CHAPITA WELL UNIT 924-23**  
**NW/SE, SEC. 23, T9S, R22E, S.L.B.&M.**  
**UINTAH COUNTY, UTAH**

**CEMENT PROGRAM (Continued):**

**Top Out:** As necessary with Class "G" cement with 2% CaCl<sub>2</sub>, 1/4#/sk Flocele mixed at 15.6 ppg, 1.18 ft<sup>3</sup>/sk., 5.2 gps water.

**Note:** Cement volumes will be calculated to bring lead cement to surface and tail cement to 500' above the casing shoe.

**Production Hole Procedure (2300'± - TD)**

**Lead:** 139 sks: 35:65 Poz "G" w/4% D20 (Bentonite), 2% D174 (Extender), 0.2% D65 (Dispersant), 0.2% D46 (Antifoam), 0.75% D112 (Fluid Loss Additive), 0.200% D13 (Retarder), 0.25 pps D29 (cello flakes) mixed at 13.0 ppg, 1.75 ft<sup>3</sup>/sk., 9.19 gps water.

**Tail:** 910 sks: 50:50 Poz "G" w/ 2% D20 (Bentonite), 0.1% D46 (Antifoam), 0.075% D13 (Retarder), 0.2% D167 (Fluid Loss Additive), 0.2% D65 (Dispersant), mixed at 14.1 ppg, 1.28 ft<sup>3</sup>/sk., 5.9gps water.

**Note:** The above number of sacks is based on gauge-hole calculation.  
Lead volume to be calculated to bring cement to 200'± above 9-5/8" casing shoe.  
Tail volume to be calculated to bring cement to 400'± above top of Wasatch.

**Final Cement volumes will be based upon gauge-hole plus 45% excess.**

**10. ABNORMAL CONDITIONS:**

**Surface Hole (Surface - 2300'±):**

Lost circulation

**Production Hole (2300'± - TD):**

Sloughing shales, lost circulation and key seat development are possible in the Wasatch Formation.

**11. STANDARD REQUIRED EQUIPMENT:**


- A. Choke Manifold
- B. Upper and Lower Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

**12. HAZARDOUS CHEMICALS:**

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.


(Attachment: BOP Schematic Diagram)

EOG RESOURCES 11" 5,000 PSI W.P. BOP  
CONFIGURATION

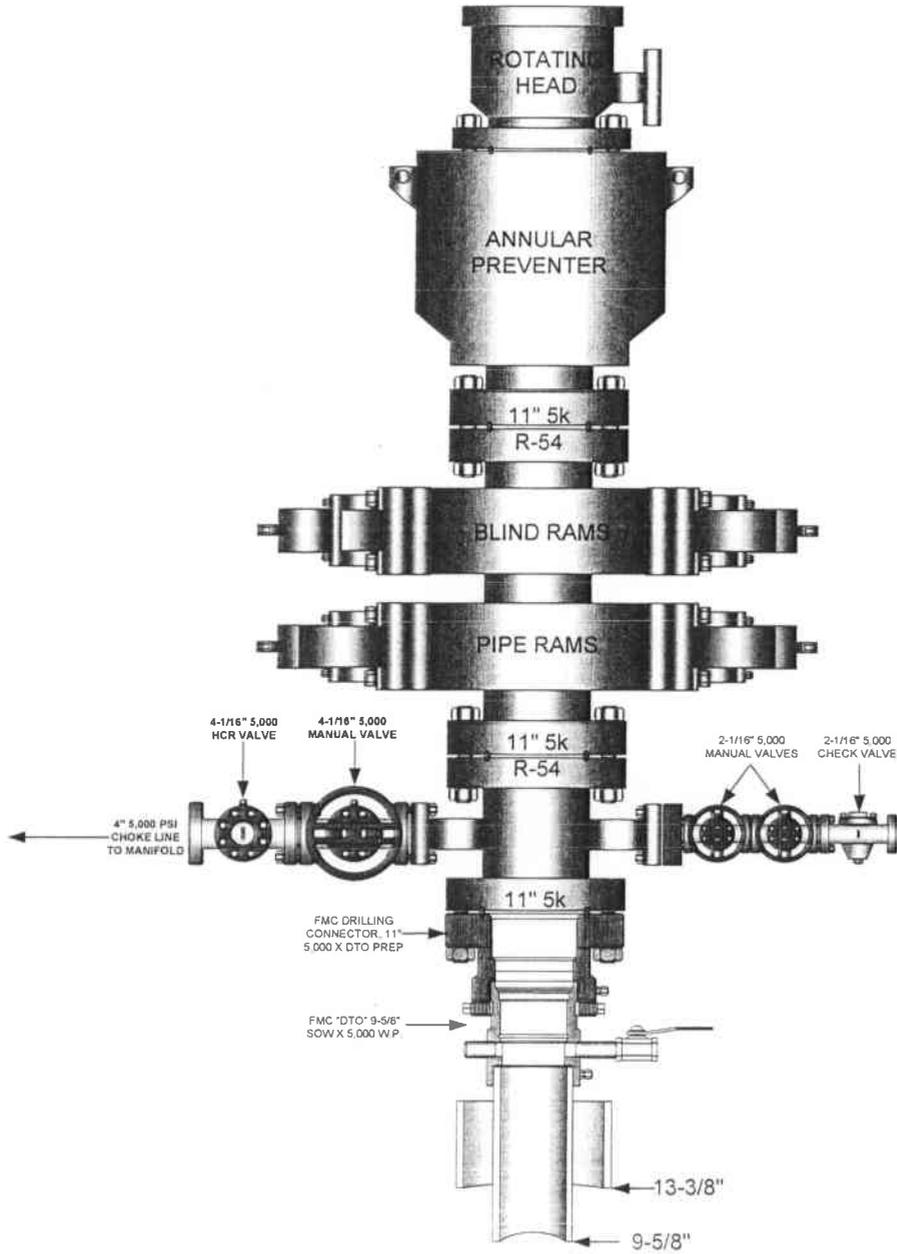

EOG RESOURCES CHOKE MANIFOLD CONFIGURATION  
W/ 5,000 PSI WP VALVES

PAGE 2 OF 2

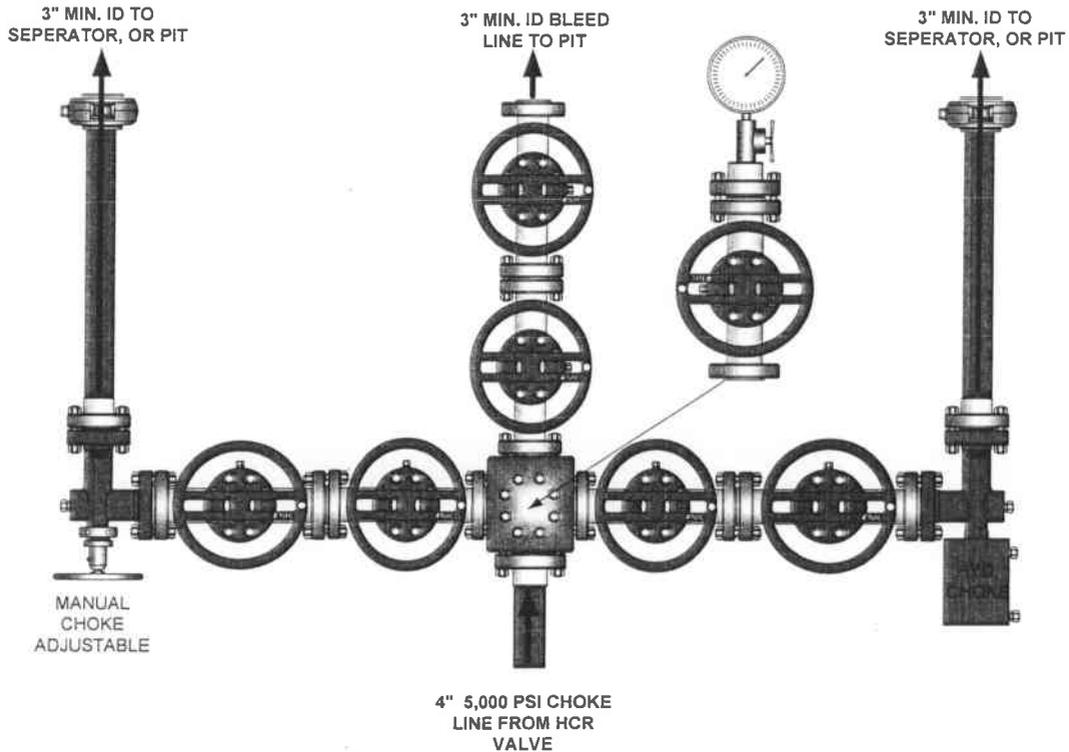

Testing Procedure:

1. BOP will be tested with a professional tester to conform to Onshore Order #2.
2. Blind and Pipe rams will be tested to rated working pressure, 5,000 psi.
3. Annular Preventer will be tested to 50% working pressure, 2,500 psi.
4. Casing will be tested to 0.22 psi / ft. or 1,500 psi. Not to exceed 70% of burst strength, whichever is greater.
5. All lines subject to well pressure will be tested to the same pressure as blind and pipe rams.
6. All BOPE specifications and configurations will meet Onshore Order #2 requirements.

**CONDITIONS OF APPROVAL  
FOR THE SURFACE USE PROGRAM OF THE  
APPLICATION FOR PERMIT TO DRILL**

Company/Operator: EOG Resources, Inc.  
Well Name & Number: Chapita Wells Unit 924-23  
Lease Number: U-0282  
Location: 1812' FSL & 2032' FEL, NW/SE, Sec. 23,  
T9S, R22E, S.L.B.&M., Uintah County, Utah  
Surface Ownership: Federal

**NOTIFICATION REQUIREMENTS**

Location Construction - forty-eight (48) hours prior to construction of location and access roads.

Location Completion - prior to moving on the drilling rig.

Spud Notice: - at least twenty-four (24) hours prior to spudding the well.

Casing String and Cementing - twenty-four (24) hours prior to running casing and cementing all casing strings.

BOP and related Equipment Tests - twenty-four (24) hours prior to running casing and tests.

First Production Notice - within five (5) business days after new Well begins or production resumes after Well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

## THIRTEEN POINT SURFACE USE PROGRAM

### 1. EXISTING ROADS

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 18.3 miles southeast of Ouray, Utah - See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

### 2. PLANNED ACCESS ROAD

- A. An existing access road will be utilized to service this well. See attached TOPO Map "B".
- B. The access road has a 30 foot ROW w/ 18 foot running surface.
- C. Maximum grade on access road will be 8%.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No culverts, bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of-Way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by run off water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, EOG Resources, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

3. **LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION**

- A. Abandoned wells - 7\*
- B. Producing wells - 42\*
- C. Shut in wells - 1\*

(\*See attached TOPO map "C" for location)

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

A. **ON WELL PAD**

- 1. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of wellhead valves, combo separator-dehy unit with meter, 300 Bbl vertical or 200 Bbl low profile, condensate tank, and attaching piping.
- 2. Gas gathering lines - A 4" gathering line will be buried from dehy to the edge of the location.

B. **OFF WELL PAD**

- 1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
- 2. Protective measures and devices for livestock and wildlife will be taken and/or installed where required.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery.

The production facilities will be placed on the Southeast side of the location.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within 6 months of installation. Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

The required paint color is Carlsbad Canyon.

If at any time the facilities located on public land and authorized by the terms of the lease are no longer included in the lease (due to a contraction in the unit or other lease or unit boundary change), BLM will process a change in authorization to the appropriate statute. The authorization will be subject to appropriate rental or other financial obligation as determined by the authorized officer.

5. **LOCATION & TYPE OF WATER SUPPLY**

- A. Water supply will be from Ouray Municipal Water Plant at Ouray, Utah, and/or Target Trucking Inc.'s water source in the SW/SW, Sec. 35, T9S, R22E, Uintah County, Utah (State Water Right #49-1501). Produced water from the Chapita Wells and Stagecoach Units will also be used.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. **SOURCE OF CONSTRUCTION MATERIAL**

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of the location.
- B. All construction material will come from Federal Land.
- C. No mineral materials will be required.

7. **METHODS OF HANDLING WASTE DISPOSAL**

A. METHODS AND LOCATION

- 1. Cuttings will be confined in the reserve pit.
  - 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
  - 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah County Landfill.
  - 4. Produced wastewater will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. After the 90 day period, the produced water will be contained in a tank on location and then disposed of at one of the following three locations: Natural Buttes Unit 21-20B SWD, Ace Disposal, or EOG Resources, Inc. drilling operations (Chapita Wells Unit, Natural Buttes Unit & Stagecoach Unit).
  - 5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.
- B. Water from drilling fluids and recovered during testing operations will be

disposed of by either evaporating in the reserve pit or be removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

**On BLM administered land:**

The reserve pit will be constructed so as not to leak, break, or allow discharge. If the reserve pit requires padding prior to lining (due to rocky conditions) felt padding will be used.

**The reserve pit shall be lined with felt and a 12 mill plastic liner.**

8. **ANCILLARY FACILITIES**

A. No airstrips or camps are planned for this well.

9. **WELLSITE LAYOUT**

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.
- D. The approved interim seed mixture for this location is:
  - Hi-Crest Crested Wheatgrass – 9 pounds per acre
  - Kochia Prostrata – 3 pounds per acre.

The final abandonment seed mixture for this location is:

- Gardner Salt Bush – 4 pounds per acre
- Shad Scale – 3 pounds per acre
- Hi-Crest Crested Wheat Grass – 2 pounds per acre

The reserve pit will be located on the South side of the location. The flare pit will be located downwind of the prevailing wind direction on the Southwest side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled pit topsoil will be stored separate from the location topsoil. The stockpiled location topsoil will be stored between Corners #2 and #4. Upon completion of construction, the stockpiled topsoil from the location will be broadcast seeded with the approved seed mixture for this location and then walked down with a Caterpillar tractor.

Access to the well pad will be from the West.

Corners #2, #6, & #8 will be rounded off to minimize excavation.

## **FENCING REQUIREMENTS:**

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BLM or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is to be regularly traveled. If the well is a producer, the cattleguards (shall/shall not) be permanently mounted on concrete bases. Prior to crossing any fence located on Federal land, or any fence between Federal land and private land, the operator will contact the BLM, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

## **10. PLANS FOR RESTORATION OF SURFACE**

### **A. PRODUCING LOCATION**

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The stockpiled pit topsoil will then be spread over the pit area and broadcast seeded with the prescribed seed mixture for this location. The seeded area will then be walked down with a cat.

**B. DRY HOLE/ABANDONED LOCATION**

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BLM will attach the appropriate surface rehabilitation conditions of approval.

**11. SURFACE OWNERSHIP**

Access road: Federal

Location: Federal

**12. OTHER INFORMATION**

A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to:

- whether the materials appear eligible for the National Register of Historic Places;
- the mitigation measures the operator will likely have to undertake before the site can be used.
- a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

B. As operator, EOG Resources, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable

facilities. A list of noxious weeds will be obtained from the BLM, or the appropriate County Extension Office. On BLM administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.

- C. The drilling rig and ancillary equipment will be removed from the location prior to commencement of completion operations. Completion operations will be conducted utilizing a completion/workover rig.
- D. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on BLM lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

**Additional Surface Stipulations**

None

**LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION**

**PERMITTING AGENT**

Ed Trotter  
P.O. Box 1910  
Vernal, UT 84078  
Telephone: (435)789-4120  
Fax: (435)789-1420

**DRILLING OPERATIONS**

Donald Presenkowski  
EOG Resources, Inc.  
P.O. Box 250  
Big Piney, WY 83113  
Telephone: (307)276-4865

All lease or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. EOG Resources, Inc. is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.


**Certification**

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions that presently exist; that the statements made in the Plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by EOG Resources, Inc. and its contractors and subcontractors in conformity with this Plan and the terms and conditions under which it is approved.

Please be advised that EOG Resources, Inc. is considered to be the operator of the **Chapita Wells Unit 924-23 Well, located in the NW/SE of Section 23, T9S, R22E, Uintah County, Utah; Lease #U-0282;** and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond Coverage is provided under Bond #NM 2308.

2-15-2006

Date

  
Agent

EOG RESOURCES, INC.  
CWU #924-23  
SECTION 23, T9S, R22E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 0.3 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 12.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 1.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 1.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 0.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 0.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY, THEN SOUTHWESTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 0.7 MILES TO THE #463-23F AND THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 49.3 MILES.

# EOG RESOURCES, INC.

CWU #924-23

LOCATED IN UINTAH COUNTY, UTAH  
SECTION 23, T9S, R22E, S.L.B.&M.



PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHEASTERLY

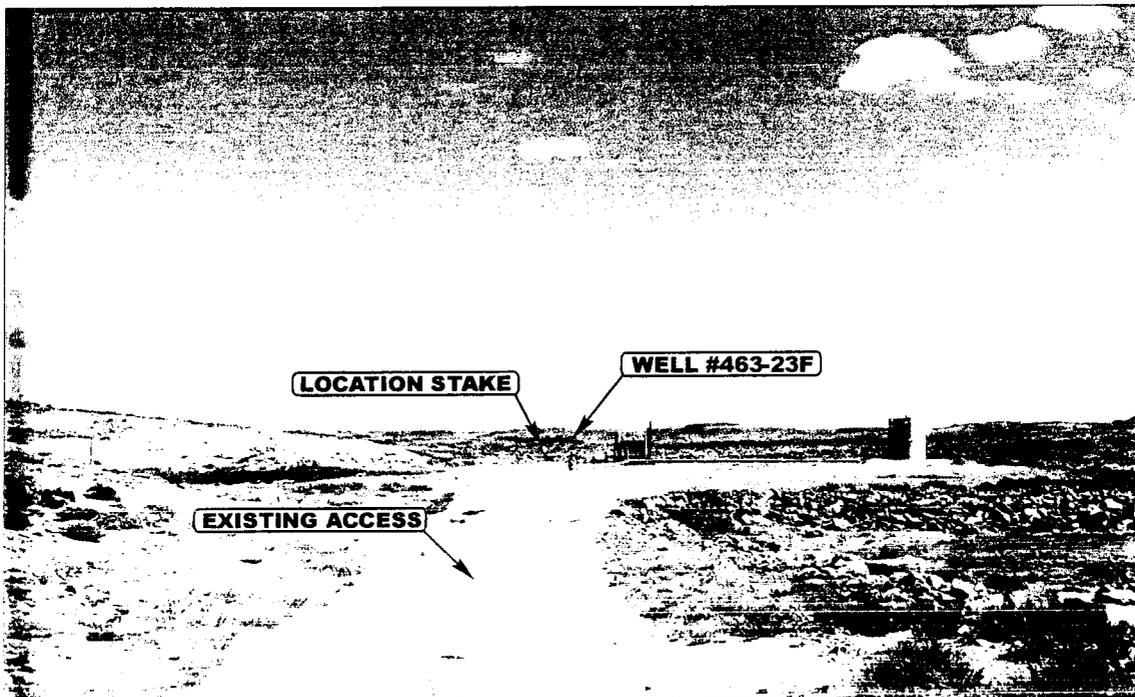


PHOTO: VIEW OF EXISTING ACCESS

CAMERA ANGLE: SOUTHEASTERLY



ELS

Utah Engineering & Land Surveying

85 South 200 East Vernal, Utah 84078  
435-789-1017 uels@uelsinc.com

Since 1964


DATE	MONTH	DAY	YEAR	PHOTO
TAKEN BY: GS.	DRAWN BY: P.M.		REVISED: 00-00-00	

EOG RESOURCES, INC.


LOCATION LAYOUT FOR  
 CWU #924-23  
 SECTION 23, T9S, R22E, S.L.B.&M.  
 1812' FSL 2032' FEL

FIGURE #1

SCALE: 1" = 50'  
 DATE: 08-25-04  
 Drawn By: D.COX

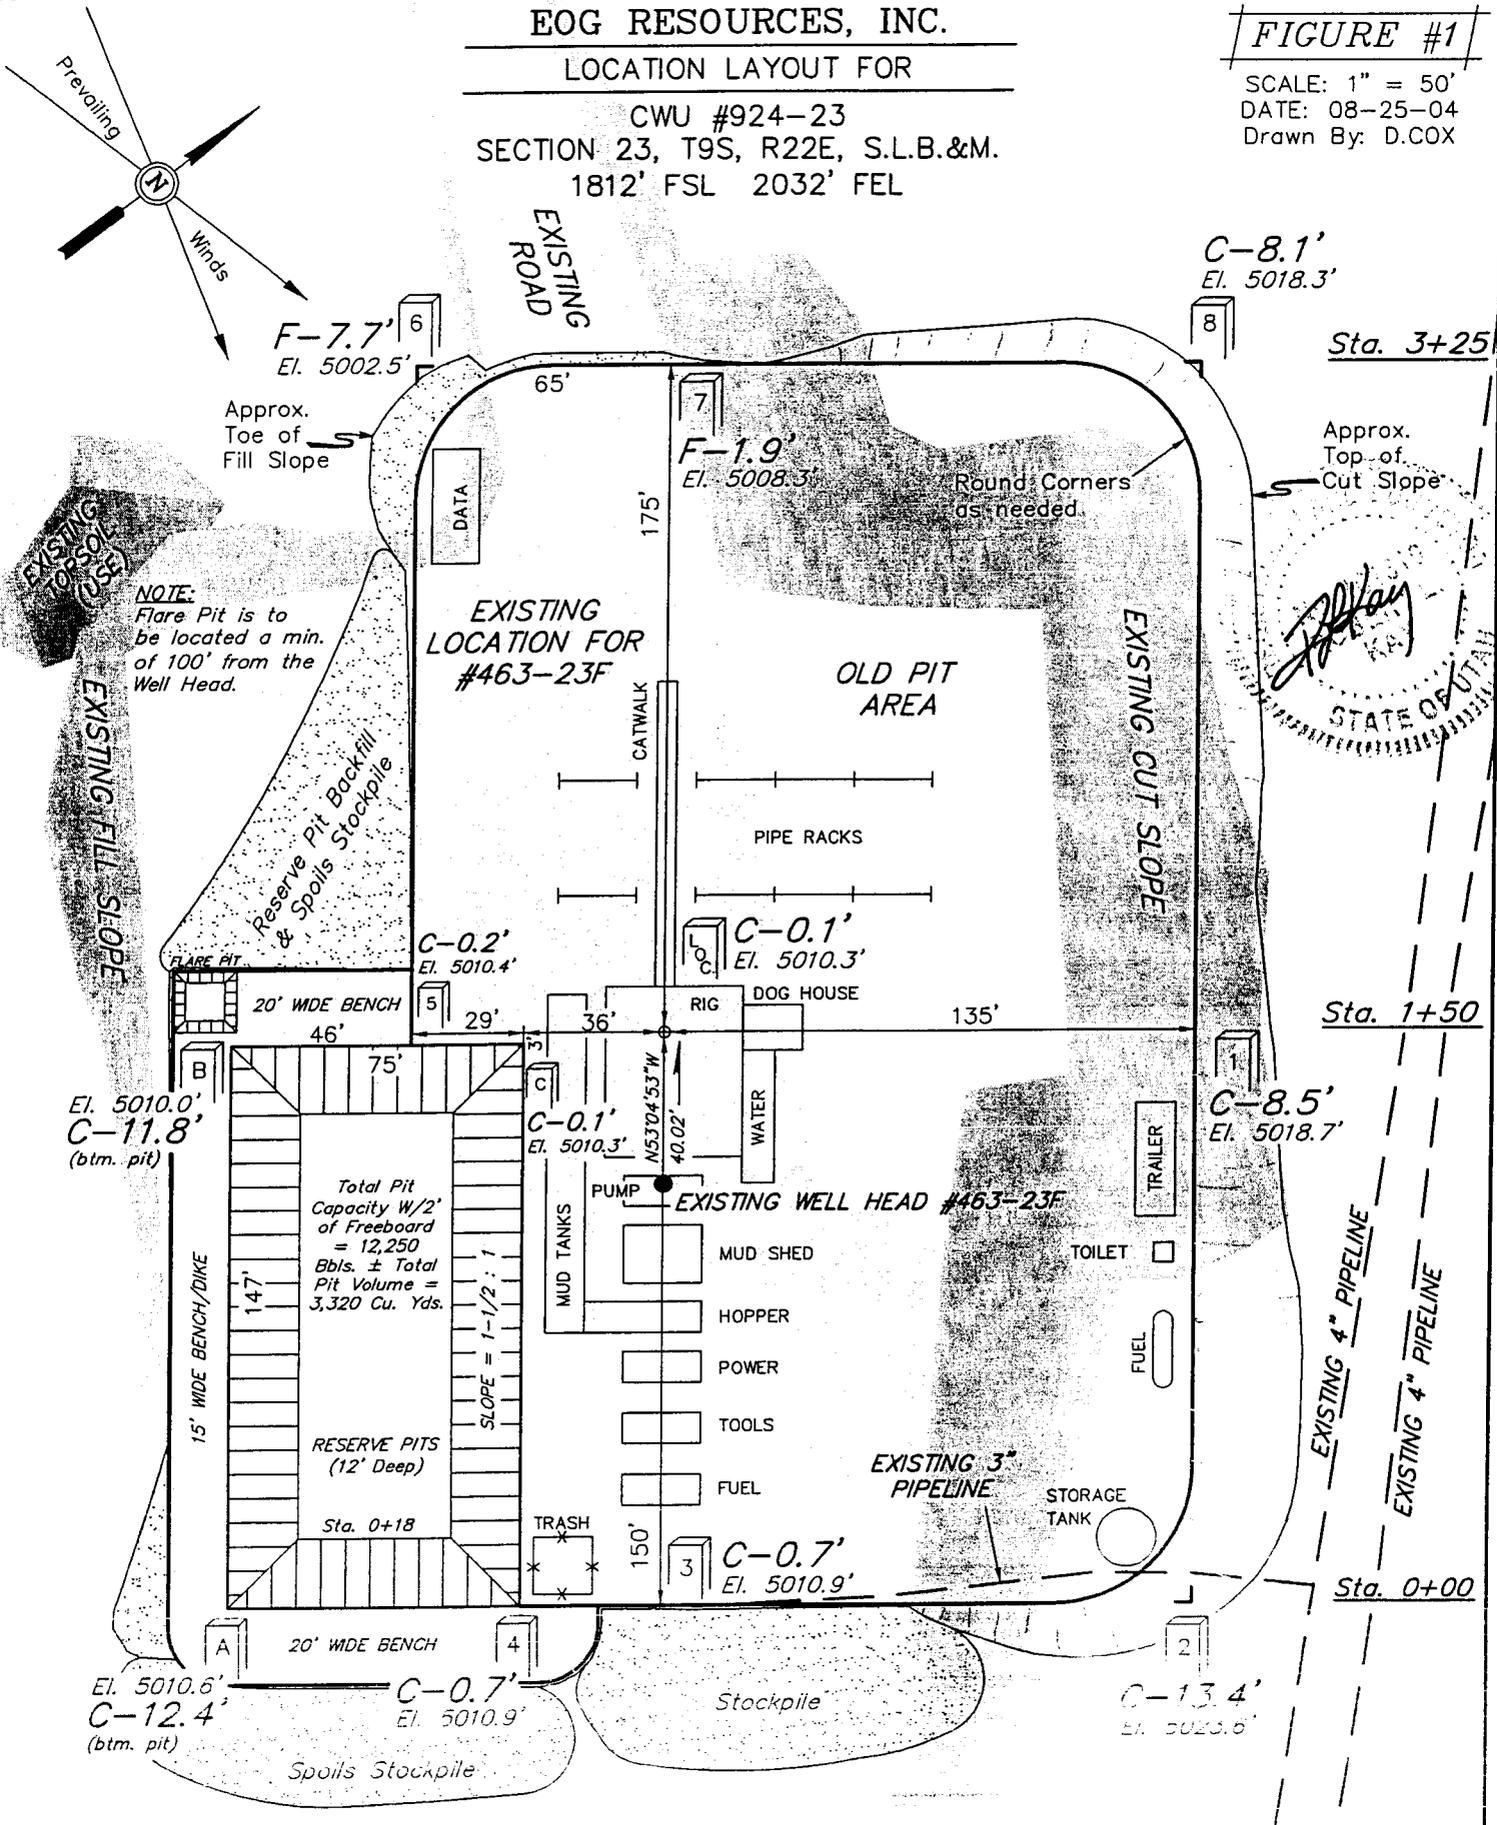

NOTE:  
 Flare Pit is to be located a min. of 100' from the Well Head.




NOTES:  
 Elev. Ungraded Ground at Location Stake = 5010.3'  
 Elev. Graded Ground at Location Stake = 5010.2'

UINTAH ENGINEERING & LAND SURVEYING  
 85 So. 200 East \* Vernal, Utah 84078 \* (435) 789-1017

EOG RESOURCES, INC.


TYPICAL CROSS SECTIONS FOR

CWU #924-23  
SECTION 23, T9S, R22E, S.L.B.&M.  
1812' FSL 2032' FEL



1" = 20'  
X-Section Scale  
1" = 50'

DATE: 08-25-04  
Drawn By: D.COX

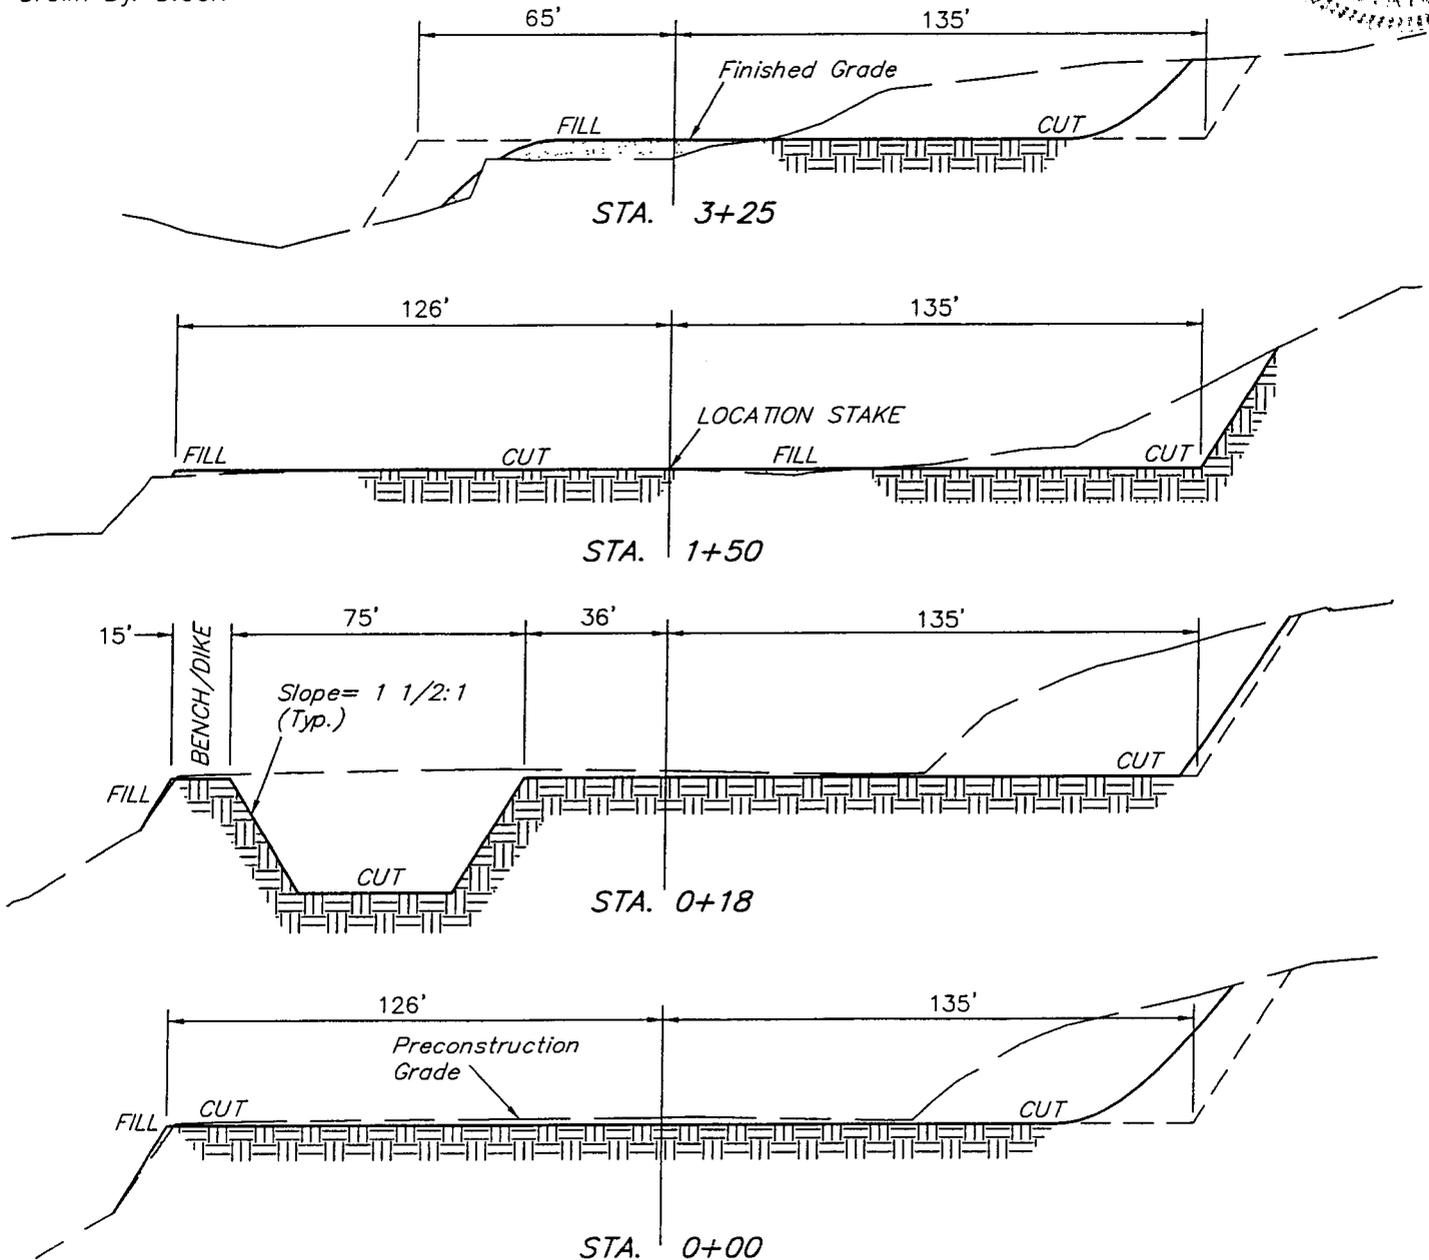


\* NOTE:  
FILL QUANTITY INCLUDES  
5% FOR COMPACTION

**APPROXIMATE YARDAGES**

No Topsoil Stripping	
TOTAL CUT	= 9,610 CU.YDS.
FILL	= 920 CU.YDS.

EXCESS MATERIAL	=	8,690 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	=	1,660 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	=	7,030 Cu. Yds.

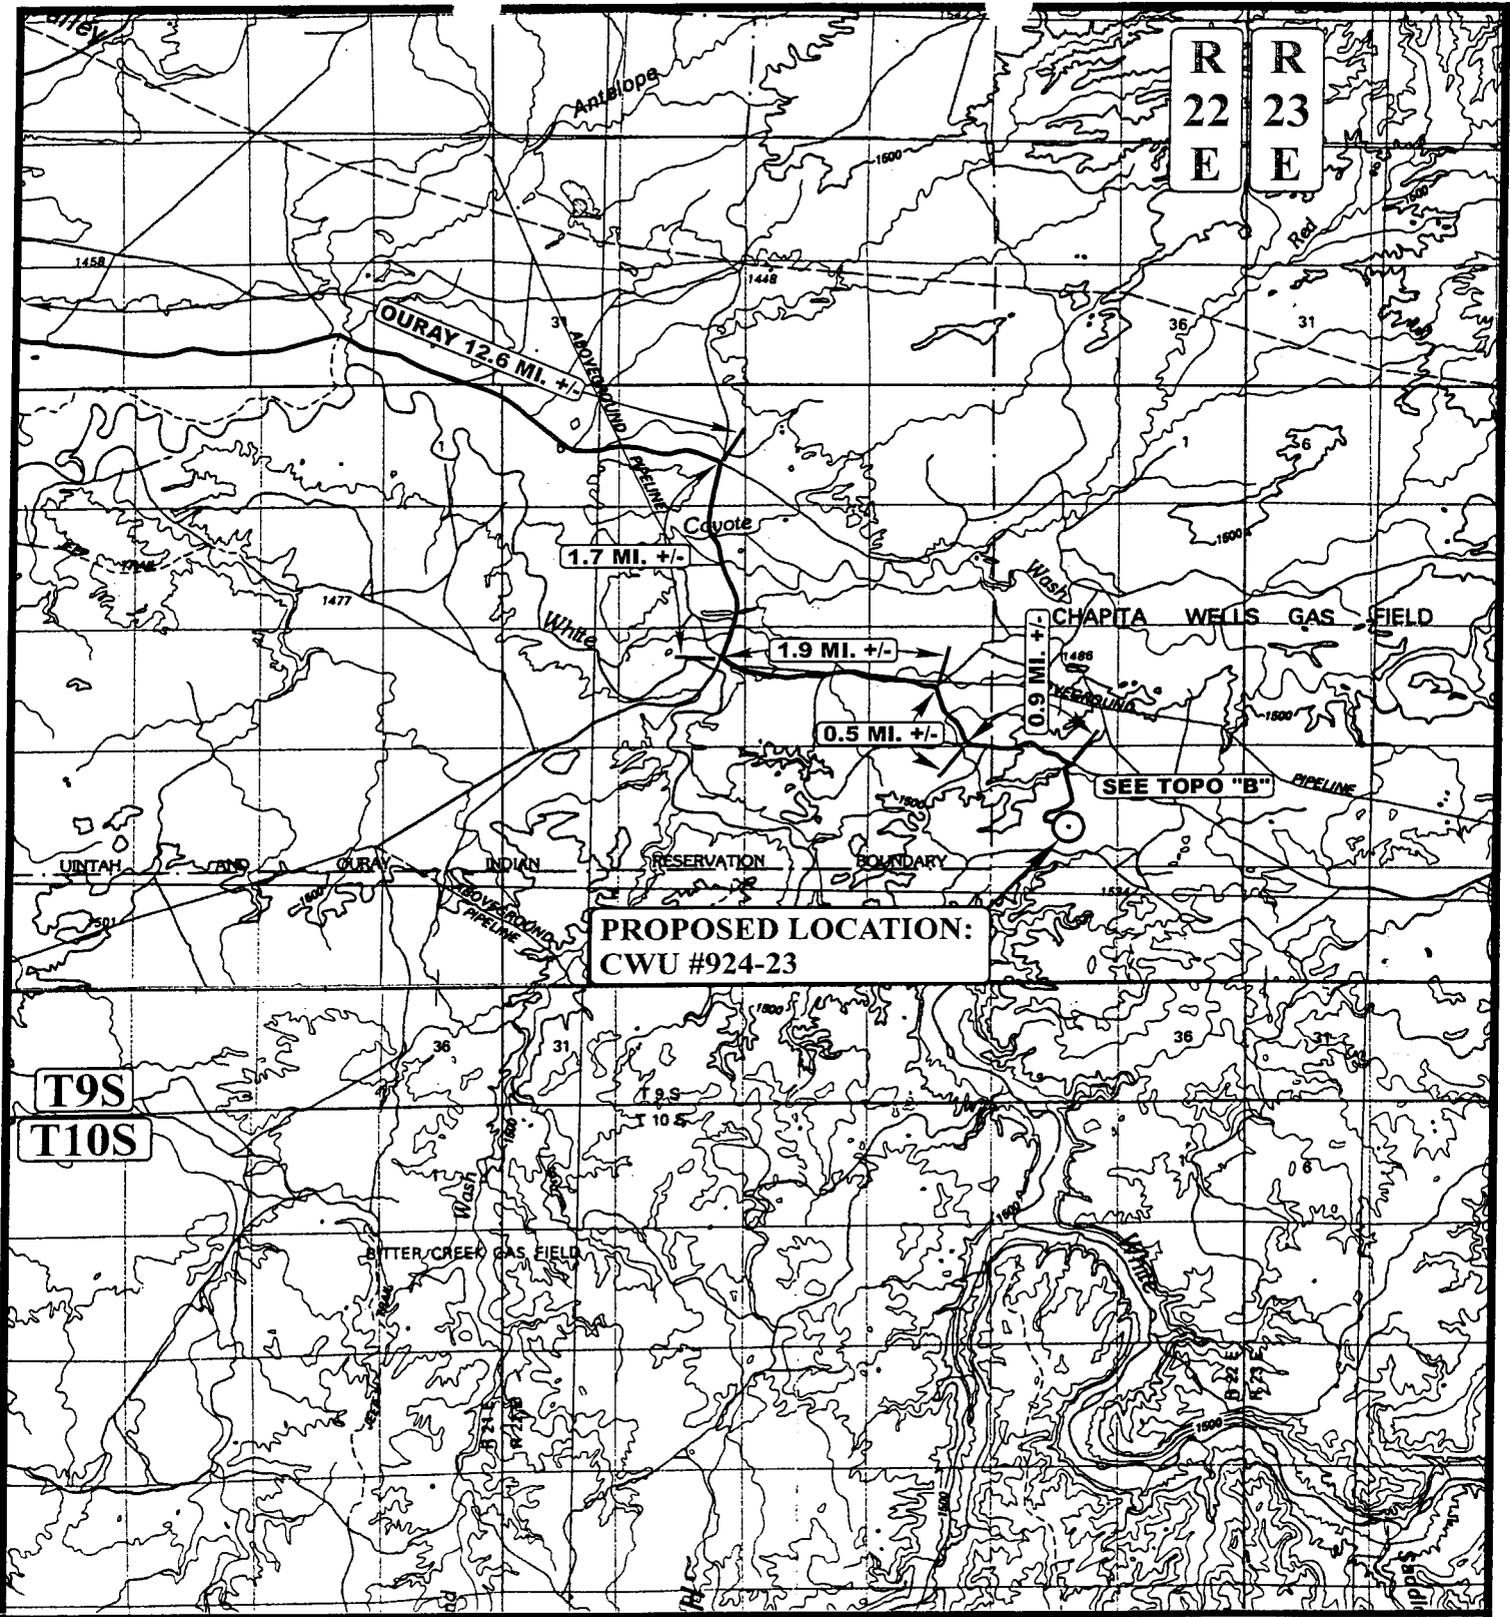

**LEGEND:**

○ PROPOSED LOCATION



Utah Engineering & Land Surveying  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813




**EOG RESOURCES, INC.**

CWU #924-23  
 SECTION 23, T9S, R22E, S.L.B.&M.  
 1812' FSL 2032' FEL

TOPOGRAPHIC MAP 08 26 04  
 MONTH DAY YEAR  
 SCALE: 1:100,000 DRAWN BY: P.M. REVISED: 00-00-00



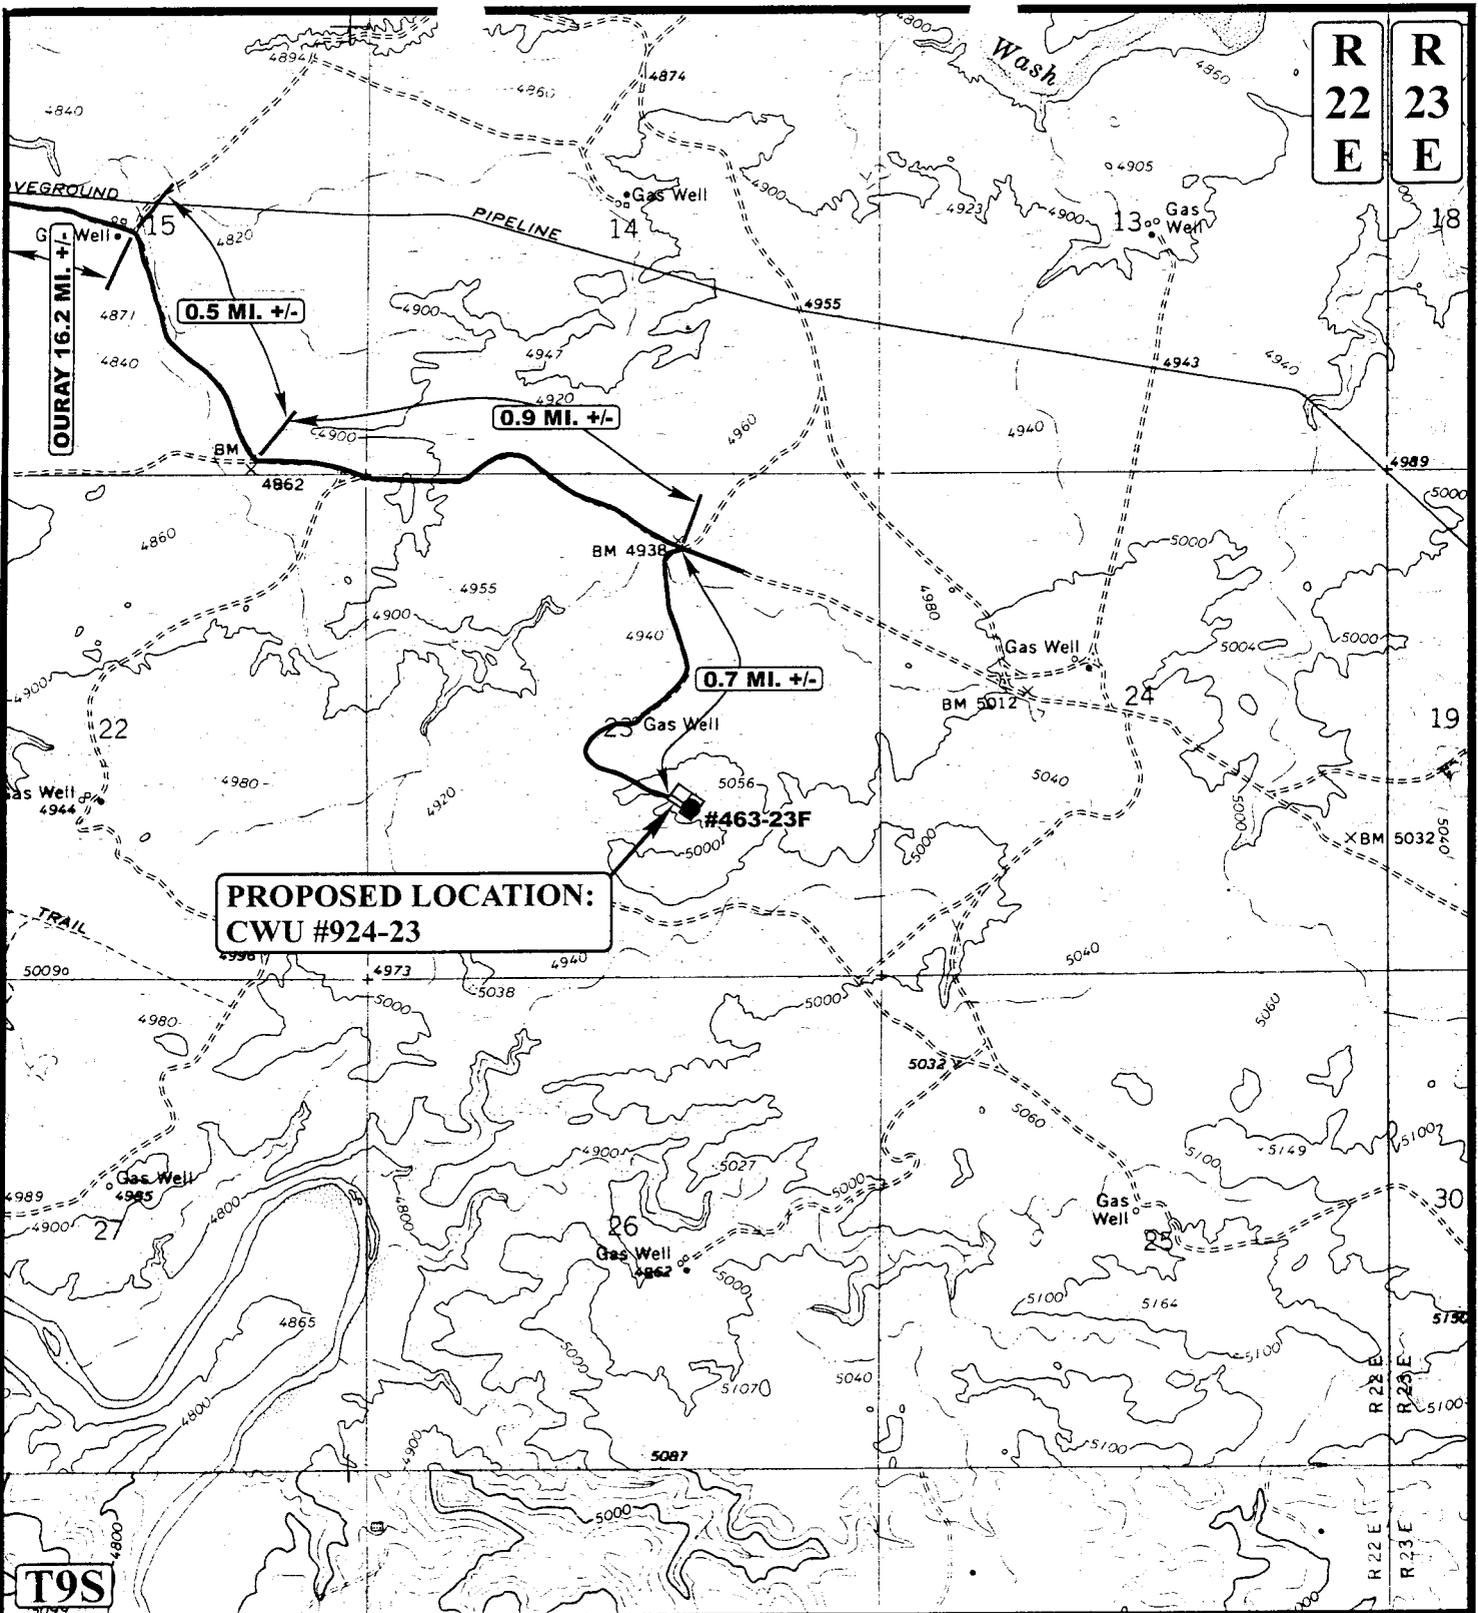

**PROPOSED LOCATION:  
CWU #924-23**

**LEGEND:**

— EXISTING ROAD



**Utah Engineering & Land Surveying**  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813




**EOG RESOURCES, INC.**

**CWU #924-23**  
**SECTION 23, T9S, R22E, S.L.B.&M.**  
**1812' FSL 2032' FEL**

**TOPOGRAPHIC MAP** 08/26/04  
MONTH | DAY | YEAR  
SCALE: 1" = 2000' | DRAWN BY: P.M. | REVISED: 00-00-00



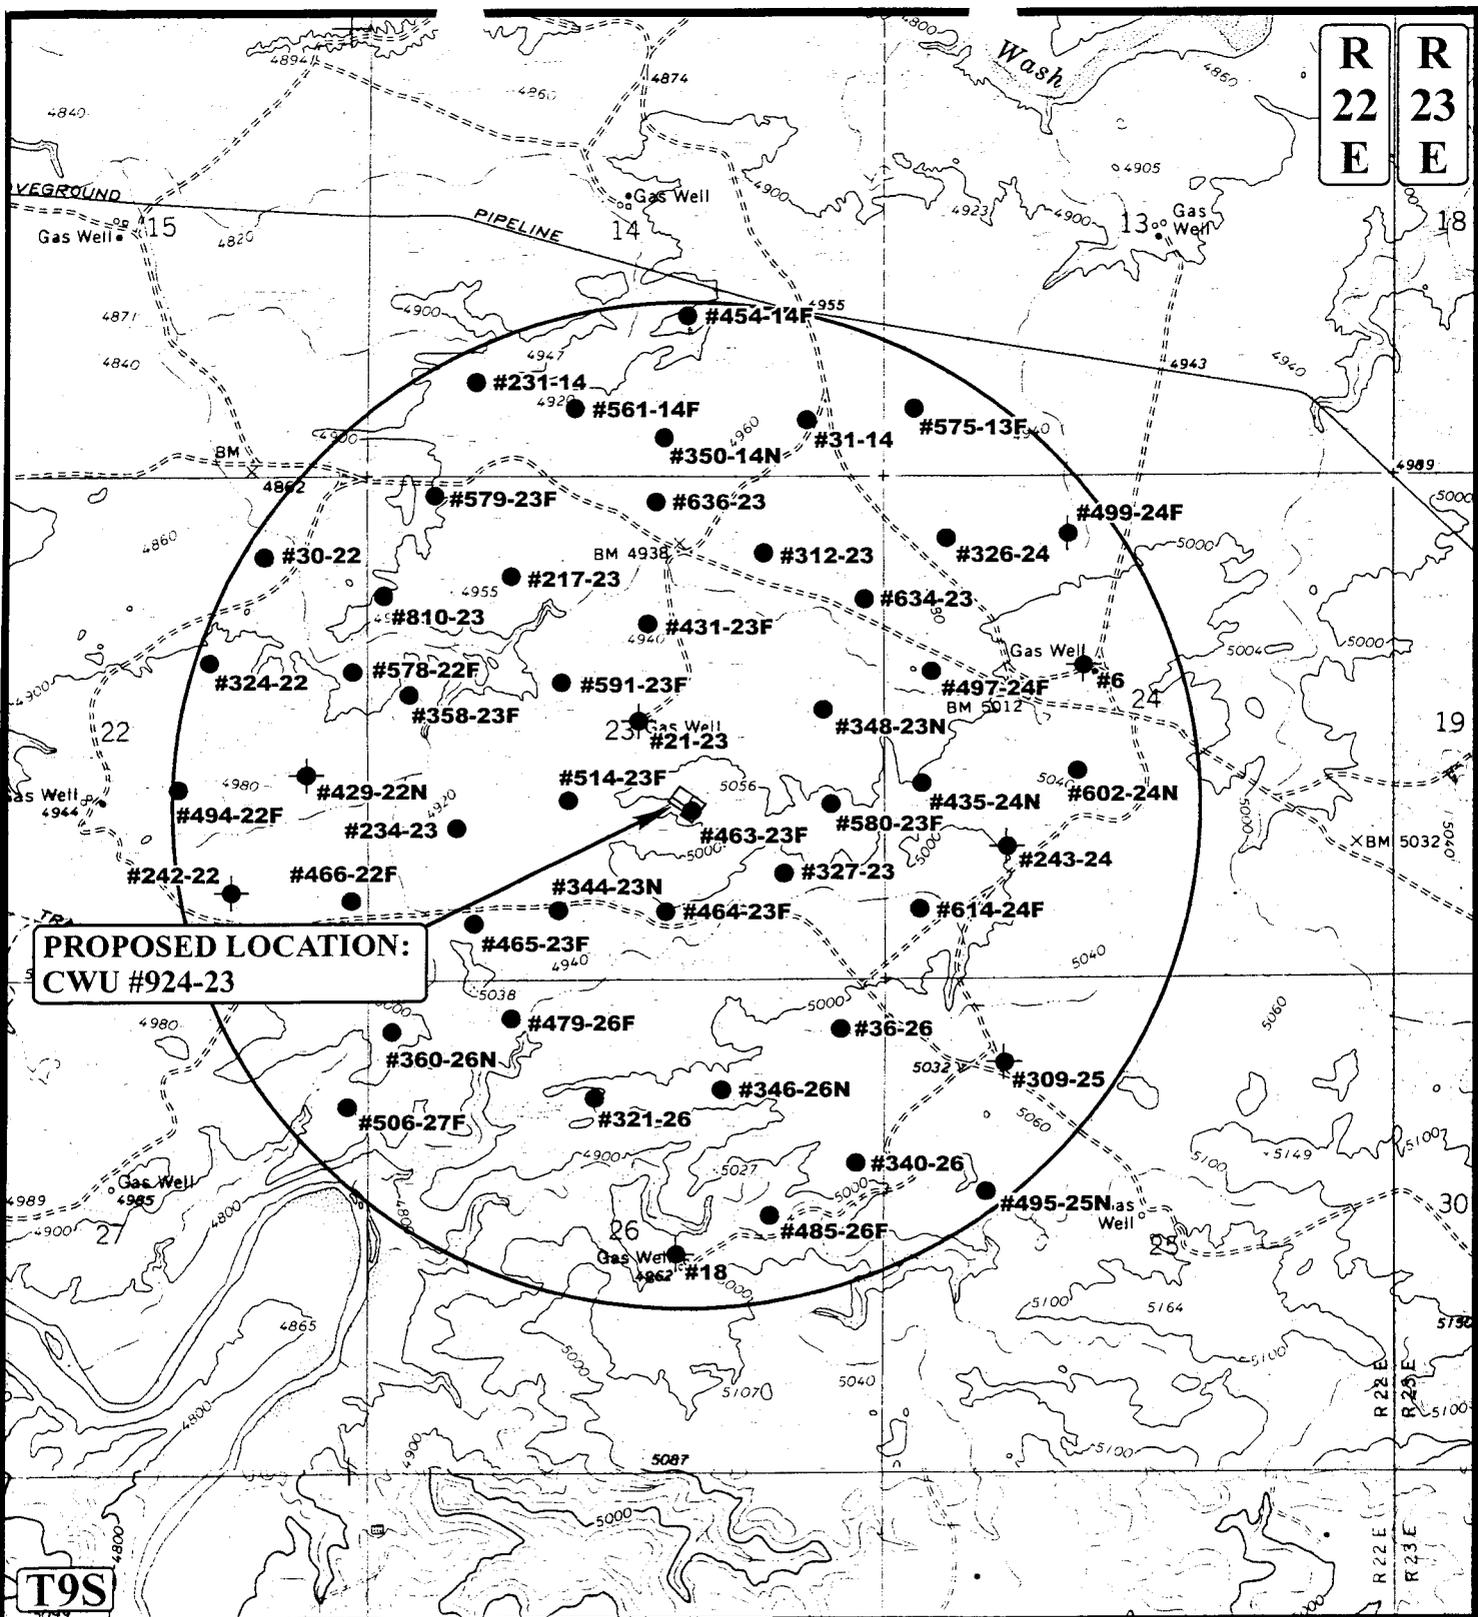

**PROPOSED LOCATION:  
CWU #924-23**

**LEGEND:**

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ⊗ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED



Utah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813



**EOG RESOURCES, INC.**

CWU #924-23  
SECTION 23, T9S, R22E, S.L.B.&M.  
1812' FSL 2032' FEL

TOPOGRAPHIC MAP  
08 | 26 | 04  
MONTH | DAY | YEAR  
SCALE: 1" = 2000' DRAWN BY: P.M. REVISED: 00-00-00



**WORKSHEET  
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 02/23/2006

API NO. ASSIGNED: 43-047-37845

WELL NAME: CWU 924-23  
 OPERATOR: EOG RESOURCES INC ( N9550 )  
 CONTACT: ED TROTTER

PHONE NUMBER: 435-789-4120

PROPOSED LOCATION:

NWSE 23 090S 220E  
 SURFACE: 1812 FSL 2032 FEL  
 BOTTOM: 1812 FSL 2032 FEL  
 COUNTY: UINTAH  
 LATITUDE: 40.01926 LONGITUDE: -109.4043  
 UTM SURF EASTINGS: 636178 NORTHINGS: 4430904  
 FIELD NAME: NATURAL BUTTES ( 630 )

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal  
 LEASE NUMBER: U-0282  
 SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: PRRV  
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]  
(No. NM-2308 )
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit  
(No. 49-1501 )
- RDCC Review (Y/N)  
(Date: \_\_\_\_\_ )
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)


LOCATION AND SITING:

- R649-2-3.
- Unit: CHAPITA WELLS
- R649-3-2. General  
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit  
Board Cause No: 179-8  
Eff Date: 8-16-49  
Siting: Suspended General Siting
- R649-3-11. Directional Drill

COMMENTS: \_\_\_\_\_

STIPULATIONS: 1- Federal Approval

2- Oil Susac

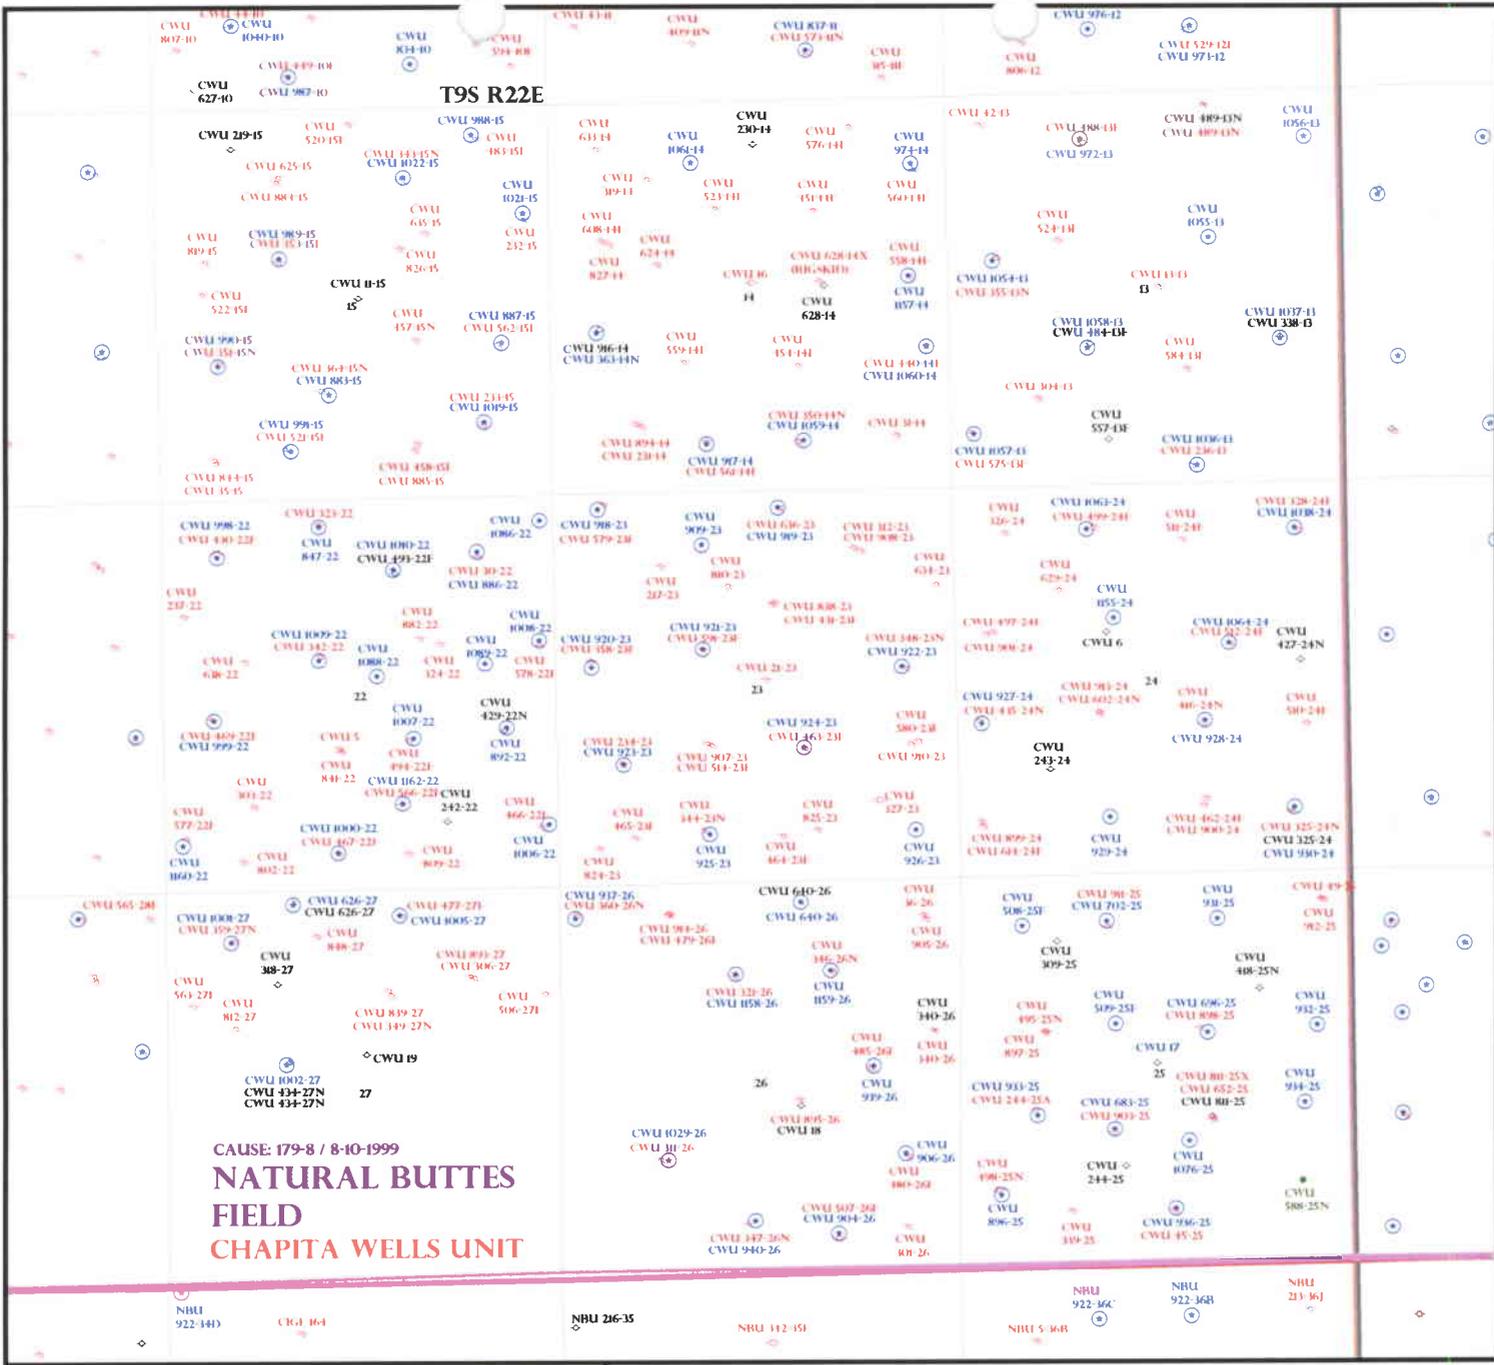

CAUSE: 179-8 / 8-10-1999  
**NATURAL BUTTES  
 FIELD**  
 CHAPITA WELLS UNIT

OPERATOR: EOG RESOURCES INC (N9550)  
 SEC: 15,22,23,24,25,26 T. 9S R. 22E  
 FIELD: NATURAL BUTTES (630)  
 COUNTY: UINTAH  
 CAUSE: 179-8 / 8-10-1999

- |                     |                    |
|---------------------|--------------------|
| <b>Field Status</b> | <b>Unit Status</b> |
| ABANDONED           | EXPLORATORY        |
| ACTIVE              | GAS STORAGE        |
| COMBINED            | NF PP OIL          |
| INACTIVE            | NF SECONDARY       |
| PROPOSED            | PENDING            |
| STORAGE             | PI OIL             |
| TERMINATED          | PP GAS             |
|                     | PP GEOTHERML       |
|                     | PP OIL             |
|                     | SECONDARY          |
|                     | TERMINATED         |

- Wells Status**
- ▲ GAS INJECTION
  - ★ GAS STORAGE
  - × LOCATION ABANDONED
  - NEW LOCATION
  - ◇ PLUGGED & ABANDONED
  - ★ PRODUCING GAS
  - PRODUCING OIL
  - SHUT-IN GAS
  - SHUT-IN OIL
  - × TEMP. ABANDONED
  - TEST WELL
  - ▲ WATER INJECTION
  - ▲ WATER SUPPLY
  - ▲ WATER DISPOSAL
  - DRILLING



PREPARED BY: DIANA WHITNEY  
 DATE: 02-MARCH-2006

**EOG Resources, Inc.**  
**P.O. 1910**  
**Vernal, UT 84078**

February 15, 2006

Utah Division of Oil, Gas, & Mining  
1594 West North Temple, Suite 1210  
P.O. Box 145801  
Salt Lake City, UT 84114-5801

RE: APPLICATION FOR PERMIT TO DRILL  
CHAPITA WELLS UNIT 924-23  
NW/SE, SEC. 23, T9S, R22E  
UINTAH COUNTY, UTAH  
LEASE NO.: U-0282  
FEDERAL LANDS

Enclosed please find a copy of the Application for Permit to Drill and associated attachments for the referenced well.

Please address further communication regarding this matter (including approval) to:

Ed Trotter  
P.O. Box 1910  
Vernal, UT 84078  
Phone: (435)789-4120  
Fax: (435)789-1420

Sincerely,



Ed Trotter  
Agent  
EOG Resources, Inc.

Attachments

RECEIVED

FEB 23 2006

UTAH DIVISION OF OIL & GAS

CWU 924-23 B

# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:  
3160  
(UT-922)

March 6, 2006

### Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2006 Plan of Development Chapita Wells Unit Uintah County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2006 within the Chapita Wells Unit, Uintah County, Utah.

API #	WELL NAME	LOCATION
(Proposed PZ Wasatch)		
43-047-37859	CWU 704-29 Sec 29 T09S R23E 0780	FSL 2122 FEL
(Proposed PZ Price River)		
43-047-37833	CWU 1019-15 Sec 15 T09S R22E 1009	FSL 0895 FEL
43-047-37839	CWU 1021-15 Sec 15 T09S R22E 1463	FNL 0350 FEL
43-047-37840	CWU 1022-15 Sec 15 T09S R22E 0954	FNL 1936 FEL
43-047-37841	CWU 988-15 Sec 15 T09S R22E 0400	FNL 1024 FEL
43-047-37842	CWU 1160-22 Sec 22 T09S R22E 0633	FSL 0253 FWL
43-047-37843	CWU 1162-22 Sec 22 T09S R22E 1164	FSL 2082 FEL
43-047-37844	CWU 923-23 Sec 23 T09S R22E 1632	FSL 0877 FWL
43-047-37845	CWU 924-23 Sec 23 T09S R22E 1812	FSL 2032 FEL
43-047-37846	CWU 919-23 Sec 23 T09S R22E 0211	FNL 2305 FEL
43-047-37847	CWU 927-24 Sec 24 T09S R22E 2080	FSL 0347 FWL
43-047-37848	CWU 930-24 Sec 24 T09S R22E 0852	FSL 0741 FEL
43-047-37849	CWU 509-25F Sec 25 T09S R22E 2007	FNL 2050 FWL
43-047-37850	CWU 508-25F Sec 25 T09S R22E 0666	FNL 0825 FWL
43-047-37851	CWU 1159-26 Sec 26 T09S R22E 1203	FNL 1736 FEL
43-047-37852	CWU 1158-26 Sec 26 T09S R22E 1224	FNL 2315 FWL
43-047-37838	CWU 1172-03 Sec 03 T09S R22E 2197	FSL 0715 FEL
43-047-37834	CWU 1177-03 Sec 03 T09S R22E 0695	FNL 0736 FWL
43-047-37858	CWU 943-29 Sec 29 T09S R23E 2107	FSL 1936 FEL

Page 2

This office has no objection to permitting the wells at this time.

/s/ Michael L. Coulthard



**State of Utah**

**Department of  
Natural Resources**

MICHAEL R. STYLER  
*Executive Director*

**Division of  
Oil, Gas & Mining**

JOHN R. BAZA  
*Division Director*

JON M. HUNTSMAN, JR.  
*Governor*

GARY R. HERBERT  
*Lieutenant Governor*

March 7, 2006

EOG Resources, Inc.  
P O Box 1815  
Vernal, UT 84078

Re: Chapita Wells Unit 924-23 Well, 1812' FSL, 2032' FEL, NW SE, Sec. 23,  
T. 9 South, R. 22 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-37845.

Sincerely,

Gil Hunt  
Associate Director

pab  
Enclosures

cc: Uintah County Assessor  
Bureau of Land Management, Vernal District Office

**Operator:** EOG Resources, Inc.  
**Well Name & Number** Chapita Wells Unit 924-23  
**API Number:** 43-047-37845  
**Lease:** U-0282

**Location:** NW SE                      **Sec.** 23                      **T.** 9 South                      **R.** 22 East

### **Conditions of Approval**

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

5. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9


<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>		5. LEASE DESIGNATION AND SERIAL NUMBER: <b>U-0282</b>
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME: <b>Chapita Wells Unit</b>
2. NAME OF OPERATOR: <b>EOG Resources, Inc.</b>		8. WELL NAME and NUMBER: <b>Chapita Wells Unit 924-23</b>
3. ADDRESS OF OPERATOR: 600 17th St., Suite 1000N CITY <b>Denver</b> STATE <b>CO</b> ZIP <b>80202</b>		9. API NUMBER: <b>43-047-37845</b>
PHONE NUMBER: <b>(303) 824-5526</b>		10. FIELD AND POOL, OR WILDCAT: <b>Natural Buttes/Mesaverde</b>
4. LOCATION OF WELL FOOTAGES AT SURFACE: <b>1812' FSL &amp; 2032' FEL 40.019247 LAT 109.404344 LON</b>		COUNTY: <b>Uintah</b>
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: <b>NWSE 23 9S 22E S</b>		STATE: <b>UTAH</b>

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> (Submit in Duplicate)  Approximate date work will start: _____  <input type="checkbox"/> <b>SUBSEQUENT REPORT</b> (Submit Original Form Only)  Date of work completion: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u><b>APD Extension</b></u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	


12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. requests the APD for the referenced well be extended for one year.

Approved by the  
Utah Division of  
Oil, Gas and Mining

Date: 02-26-2007  
By: 

RECEIVED  
FEB 26 2007  
RM

NAME (PLEASE PRINT) <u>Mary A. Maestas</u>	TITLE <u>Regulatory Assistant</u>
SIGNATURE 	DATE <u>2/23/2007</u>

(This space for State use only)

**RECEIVED**  
**FEB 26 2007**  
DIV. OF OIL, GAS & MINING

**Application for Permit to Drill  
Request for Permit Extension  
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

**API:** 43-047-37845  
**Well Name:** Chapita Wells Unit 924-23  
**Location:** 1812 FSL 2032 FEL (NWSE) SECTION 23, T9S, R22E, S.L.B.&M.  
**Company Permit Issued to:** EOG RESOURCES, INC.  
**Date Original Permit Issued:** 3/7/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes  No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes  No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes  No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes  No

Has the approved source of water for drilling changed? Yes  No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes  No

Is bonding still in place, which covers this proposed well? Yes  No

Mary A. Martin  
Signature

2/23/2007  
Date

**Title:** REGULATORY ASSISTANT

**Representing:** EOG RESOURCES, INC.

RECEIVED

FEB 26 2007

DIV. OF OIL, GAS & MINING

# DIVISION OF OIL, GAS AND MINING

## **SPUDDING INFORMATION**

Name of Company: EOG RESOURCES INC

Well Name: CWU 924-23

Api No: 43-047-37845 Lease Type: FEDERAL

Section 23 Township 09S Range 22E County UINTAH

Drilling Contractor ROCKY MOUNTAIN DRLG RIG # RATHOLE

### **SPUDDED:**

Date 03/09/07

Time 1:30 PM

How DRY

**Drilling will Commence:** \_\_\_\_\_

Reported by KYLAN COOK

Telephone # (435) 790-8236

Date 03/09/07 Signed CHD

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 6

**ENTITY ACTION FORM**

Operator: EOG RESOURCES, INC. Operator Account Number: N 9550  
 Address: 600 17th Street  
city Denver  
state CO zip 80202 Phone Number: (303) 262-2812

**Well 1**

API Number	Well Name		QQ	Sec	Twp	Rng	County
43-047-37845	CHAPITA WELLS UNIT 924-23		NWSE	23	9S	22E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
<i>XB</i>	99999	<i>13650</i>	3/9/2007		<i>3/15/07</i>		
Comments: <i>PRRU=MVRD</i>							

**Well 2**

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
Comments:							

**Well 3**

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
Comments:							

**ACTION CODES:**

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Carrie MacDonald

Name (Please Print)

*Carrie MacDonald*

Signature

Operations Clerk

3/13/2007

Title

Date

**RECEIVED**  
**MAR 14 2007**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires: March 31, 2007

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*


<b>SUBMIT IN TRIPLICATE- Other instructions on reverse side.</b>		5. Lease Serial No. <b>U-0282</b>
1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		6. If Indian, Allottee or Tribe Name
2. Name of Operator <b>EOG Resources, Inc.</b>		7. If Unit or CA/Agreement, Name and/or No. <b>Chapita Wells Unit</b>
3a. Address <b>600 17th Street, Suite 1000N, Denver, CO 80202</b>		8. Well Name and No. <b>Chapita Wells Unit 924-23</b>
3b. Phone No. (include area code) <b>303-262-2812</b>		9. API Well No. <b>43-047-37845</b>
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) <b>1,812' FSL &amp; 2,032' FEL (NWSE) Sec. 23-T9S-R22E 40.019247 LAT 109.404344 LON</b>		10. Field and Pool, or Exploratory Area <b>Natural Buttes/Mesaverde</b>
		11. County or Parish, State <b>Uintah County, Utah</b>

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <b>Well spud</b>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

**The referenced well spud on 3/9/2007.**

14. I hereby certify that the foregoing is true and correct Name (Printed/Typed) <b>Carrie MacDonald</b>		Title <b>Operations Clerk</b>
Signature 		Date <b>03/13/2007</b>

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by _____	Title _____	Date _____
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office _____	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**RECEIVED**

**MAR 14 2007**

**DIV. OF OIL, GAS & MINING**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires: March 31, 2007

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

**SUBMIT IN TRIPLICATE- Other instructions on reverse side.**

1. Type of Well  
 Oil Well     Gas Well     Other

2. Name of Operator    **EOG Resources, Inc.**

3a. Address  
**600 17th Street, Suite 1000N, Denver, CO 80202**

3b. Phone No. (include area code)  
**303-262-2812**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**1,812' FSL & 2,032' FEL (NWSE)  
 Sec. 23-T9S-R22E 40.019247 LAT 109.404344 LON**

5. Lease Serial No.  
**U-0282**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.  
**Chapita Wells Unit**

8. Well Name and No.  
**Chapita Wells Unit 924-23**

9. API Well No.  
**43-047-37845**

10. Field and Pool, or Exploratory Area  
**Natural Buttes/Mesaverde**

11. County or Parish, State  
**Uintah County, Utah**

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input checked="" type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

**EOG Resources, Inc. requests authorization for disposal of produced water from the referenced well to any of the following locations.**

- 1. Natural Buttes Unit 21-20B SWD
- 2. Chapita Wells Unit 550-30N SWD
- 3. Ace Disposal
- 4. RN Industries


**Accepted by the  
Utah Division of  
Oil, Gas and Mining  
FOR RECORD ONLY**

14. I hereby certify that the foregoing is true and correct  
 Name (Printed/Typed)

**Carrie MacDonald**

Title **Operations Clerk**

Signature



Date

**03/13/2007**

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by \_\_\_\_\_

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**RECEIVED**

**MAR 14 2007**

**DIV. OF OIL, GAS & MINING**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMBNO. 1004-0137  
Expires: March 31, 2007

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. Type of Well  Oil Well  Gas Well  Dry  Other  
 b. Type of Completion:  New Well  Work Over  Deepen  Plug Back  Diff. Resvr.,  
 Other \_\_\_\_\_

2. Name of Operator **EOG RESOURCES, INC**

3. Address **600 17th Street, Suite 1000N, Denver, CO 80202** 3a. Phone No. (include area code)  
**303-262-2812**

4. Location of Well (Report location clearly and in accordance with Federal requirements)\*  
 At surface **1,812' FSL & 2,032' FEL (NWSE) 40.019247 LAT 109.404344 LON**  
 At top prod. interval reported below **Same**  
 At total depth **Same**

5. Lease Serial No.  
**U-0282**

6. If Indian, Allottee or Tribe Name

7. Unit or CA Agreement Name and No.  
**Chapita Wells Unit**

8. Lease Name and Well No.  
**Chapita Wells Unit 924-23**

9. AFI Well No.  
**43-047-37845**

10. Field and Pool, or Exploratory  
**Natural Buttes/Mesaverde**

11. Sec., T., R., M., on Block and Survey or Area **Sec. 23-T9S-R22E**

12. County or Parish **Uintah County** 13. State **UT**

14. Date Spudded **03/09/2007** 15. Date T.D. Reached **04/13/2007** 16. Date Completed **05/25/2007**  
 D & A  Ready to Prod.

17. Elevations (DF, RKB, RT, GL)\*  
**5,010' GL**

18. Total Depth: MD **9,475'** 19. Plug Back T.D.: MD **9,417'** 20. Depth Bridge Plug Set: MD  
 TVD TVD TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)  
**RST/CBL/VDL/CCL/GR**

22. Was well cored?  No  Yes (Submit analysis)  
 Was DST run?  No  Yes (Submit report)  
 Directional Survey?  No  Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sks. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12-1/4"	9-5/8"	36	J-55	0 - 2354		550 sx			
7-7/8"	4-1/2"	11.6	N-80	0 - 9462		1,946 sx			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-3/8"	7545							

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Mesaverde	7158	9241	8974 - 9241		3/spf	
B)			8731 - 8915		3/spf	
C)			8426 - 8661		3/spf	
D)			8289 - 8385		3/spf	

26. Perforation Record

Depth Interval	Amount and Type of Material
8974 - 9241	42,488 GALS GELLED WATER & 131,200# 20/40 SAND
8731 - 8915	51,085 GALS GELLED WATER & 168,000# 20/40 SAND
8426 - 8661	51,007 GALS GELLED WATER & 169,100# 20/40 SAND
8289 - 8385	51,258 GALS GELLED WATER & 168,800# 20/40 SAND

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
05/25/2007	05/31/2007	24	→	40	551	297			FLOWING
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	Production Method
12/64"	SI 1750	2850	→	40	551	297		PRODUCING	

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	Production Method
			→						

\*(See instructions and spaces for additional data on page 2)

RECEIVED

JUN 29 2007

DIV. OF OIL, GAS & MINING

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

29. Disposition of Gas (Sold, used for fuel, vented, etc.)

**SOLD**

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
Mesaverde	7158	9241		Wasatch Chapita Wells Buck Canyon Mesaverde Middle Price River Lower Price River Sego	4729 5316 6005 7117 7984 8758 9251


32. Additional remarks (include plugging procedure):

**SEE ATTACHED SHEET.**

33. Indicate which items have been attached by placing a check in the appropriate boxes:

- Electrical/Mechanical Logs (1 full set req'd.)    
  Geologic Report    
  DST Report    
  Directional Survey  
 Sundry Notice for plugging and cement verification    
  Core Analysis    
  Other:

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)\*

Name (please print) Carrie MacDonald Title Operations Clerk  
 Signature  Date 06/22/2007

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**Chapita Wells Unit 924-23 - ADDITIONAL REMARKS (CONTINUED):**

**26. PERFORATION RECORD**

8081-8223	2/spf
7922-8037	3/spf
7629-7842	3/spf
7377-7516	3/spf
7158-7279	3/spf

**27. ACID, FRACTURE TREATMENT, CEMENT SQUEEZE, ETC.**

8081-8223	55,733 GALS GELLED WATER & 192,300# 20/40 SAND
7922-8037	51,293 GALS GELLED WATER & 169,700# 20/40 SAND
7629-7842	38,828 GALS GELLED WATER & 99,600# 20/40 SAND
7377-7516	51,110 GALS GELLED WATER & 169,600# 20/40 SAND
7158-7279	45,030 GALS GELLED WATER & 148,762# 20/40 SAND

Perforated the Lower Price River from 8974-8975', 8995-8996', 9058-9059', 9070-9071', 9091-9092', 9111-9112', 9152-9153', 9168-9169', 9204-9205', 9211-9212', 9221-9222', 9234-9235', 9240-9241' w/ 3 spf.

Perforated the Lower Price River from 8731-8732', 8741-8742', 8754-8755', 8797-8798', 8817-8818', 8828-8829', 8837-8838', 8872-8873', 8878-8879', 8884-8885', 8904-8905', 8914-8915' w/ 3 spf.

Perforated the Middle Price River from 8426-8427', 8445-8446', 8459-8460', 8487-8488', 8509-8510', 8535-8536', 8554-8555', 8576-8577', 8596-8597', 8616-8617', 8635-8636', 8660-8661' w/ 3 spf.

Perforated the Middle Price River from 8289-8290', 8297-8298', 8301-8302', 8307-8308', 8317-8318', 8321-8322', 8339-8340', 8346-8347', 8358-8359', 8363-8364', 8381-8382', 8384-8385' w/ 3 spf.

Perforated the Middle Price River from 8081-8082', 8099-8100', 8103-8104', 8120-8121', 8130-8131', 8139-8140', 8148-8149', 8154-8155', 8168-8169', 8178-8179', 8192-8193', 8198-8199', 8217-8218', 8222-8223' w/ 2 spf.

Perforated the Middle Price River from 7922-7923', 7928-7929', 7936-7937', 7979-7980', 7982-7983', 7998-7999', 8005-8006', 8013-8014', 8018-8019', 8025-8026', 8032-8033', 8036-8037' w/ 3 spf.

Perforated the Upper Price River from 7629-7630', 7646-7647', 7666-7667', 7686-7687', 7713-7714', 7746-7747', 7768-7769', 7796-7797', 7824-7825', 7832-7833', 7840-7842' w/ 3 spf.

Perforated the Upper Price River from 7377-7378', 7386-7387', 7396-7397', 7425-7426', 7459-7460', 7475-7476', 7480-7481', 7486-7487', 7492-7493', 7505-7506', 7511-7512', 7515-7516' w/ 3 spf.

Perforated the Upper Price River from 7158-7159', 7195-7196', 7202-7204', 7209-7210', 7223-7224', 7233-7234', 7237-7238', 7242-7243', 7258-7259', 7273-7274', 7278-7279' w/ 3 spf.

**REPORT OF WATER ENCOUNTERED DURING DRILLING**

Well name and number: CWU 924-23

API number: 43-047-37845

Well Location: QQ NWSE Section 23 Township 9S Range 22E County UINTAH

Well operator: EOG Resources, Inc.

Address: 1060 E HWY 40

city VERNAL state UT zip 84078

Phone: (435) 781-9111

Drilling contractor: CRAIG'S ROUSTABOUT SERVICE

Address: PO BOX 41

city JENSEN state UT zip 84035

Phone: (435) 781-1367


Water encountered (attach additional pages as needed):

DEPTH		VOLUME (FLOW RATE OR HEAD)	QUALITY (FRESH OR SALTY)
FROM	TO		
1,760	1,800	NO FLOW	NOT KNOWN
2,230	2,240	NO FLOW	NOT KNOWN

Formation tops:	1 _____	2 _____	3 _____
(Top to Bottom)	4 _____	5 _____	6 _____
	7 _____	8 _____	9 _____
	10 _____	11 _____	12 _____

If an analysis has been made of the water encountered, please attach a copy of the report to this form.

I hereby certify that this report is true and complete to the best of my knowledge.

NAME (PLEASE PRINT) Carrie MacDonald  
SIGNATURE 

TITLE Operations Clerk  
DATE 6/22/2007

**RECEIVED**  
**JUN 29 2007**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB NO. 1004-0135  
Expires: July 31, 2010

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.*

5. Lease Serial No.  
UTU0282

6. If Indian, Allottee or Tribe Name

**SUBMIT IN TRIPLICATE - Other instructions on reverse side.**

7. If Unit or CA/Agreement, Name and/or No.  
CHAPITA WELLS UNI

1. Type of Well  
 Oil Well  Gas Well  Other

8. Well Name and No.  
CHAPITA WELLS UNIT 924-23

2. Name of Operator  
EOG RESOURCES INC

Contact: MARY A. MAESTAS  
E-Mail: mary\_maestas@eogresources.com

9. API Well No.  
43-047-37845

3a. Address  
600 17TH STREET SUITE 1000N  
DENVER, CO 80202

3b. Phone No. (include area code)  
Ph: 303-824-5526

10. Field and Pool, or Exploratory  
NATURAL BUTTES/MESAVERDE

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
  
Sec 23 T9S R22E NWSE 1812FSL 2032FEL  
40.01925 N Lat, 109.40434 W Lon

11. County or Parish, and State  
UINTAH COUNTY, UT

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input checked="" type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

All material, debris, trash, and junk was removed from the location. The reserve pit was reclaimed. Stockpiled topsoil was spread over the pit area and broadcast seeded with the prescribed seed mixture. The seeded area was then walked down with a cat.

**RECEIVED**  
**JAN 17 2008**  
DIV. OF OIL, GAS & MINING


14. I hereby certify that the foregoing is true and correct.

**Electronic Submission #58037 verified by the BLM Well Information System  
For EOG RESOURCES INC, sent to the Vernal**

Name (Printed/Typed) MARY A. MAESTAS

Title REGULATORY ASSISTANT

Signature



Date 01/14/2008

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved By \_\_\_\_\_

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**\*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED \*\***