

APPLICATION FOR PERMIT TO DRILL			5. MINERAL LEASE NO: U-0281	6. SURFACE: Federal
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>			7. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input checked="" type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>			8. UNIT or CA AGREEMENT NAME: CHAPITA WELLS UNIT	
2. NAME OF OPERATOR: EOG RESOURCES, INC			9. WELL NAME and NUMBER: CHAPITA WELLS UNIT 837-11X	
3. ADDRESS OF OPERATOR: P.O. BOX 1815 CITY VERNAL STATE UT ZIP 84078		PHONE NUMBER: (435) 789-0790	10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES	
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 668 FSL 1827 FEL 40.045017 LAT 109.404219 LON <i>636183 X 40.045130</i> AT PROPOSED PRODUCING ZONE: SAME <i>4433777 Y 109.403621</i>			11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWSE 11 9S 22E S	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 18 MILES SOUTHEAST OF OURAY, UTAH			12. COUNTY: UINTAH	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 668	16. NUMBER OF ACRES IN LEASE: 2558	17. NUMBER OF ACRES ASSIGNED TO THIS WELL:		
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) 2890'	19. PROPOSED DEPTH: 9,500	20. BOND DESCRIPTION: NM-2308		
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 4794 GR	22. APPROXIMATE DATE WORK WILL START: 3/27/2006	23. ESTIMATED DURATION: 45 DAYS		

24. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT			SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT
17-1/2	13-3/8	H-40	48#	60	SEE ATTACHED 8 POINT PLAN
12-1/4	9-5/8	J-55	36#	2,300	SEE ATTACHED 8 POINT PLAN
7-7/8	4-1/2	N-80	11.6#	9,500	SEE ATTACHED 8 POINT PLAN

25. ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:

- | | |
|--|--|
| <input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER | <input checked="" type="checkbox"/> COMPLETE DRILLING PLAN |
| <input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER | <input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER |

NAME (PLEASE PRINT) KAYLENE R. GARDNER TITLE REGULATORY ASSISTANT
SIGNATURE *Kaylene Gardner* DATE 3/21/2006

(This space for State use only)

API NUMBER ASSIGNED: 43-047-379-12

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 03-30-06
By: *[Signature]*

MAR 27 2006

T9S, R22E, S.L.B.&M.

EOG RESOURCES, INC.



Well location, CWU #837-11X, located as shown in the SW 1/4 SE 1/4 of Section 11, T9S, R22E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

BENCH MARK 20EAM LOCATED IN THE SE 1/4 OF SECTION 35, T8S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4697 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

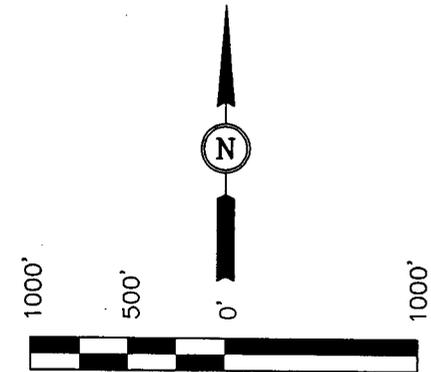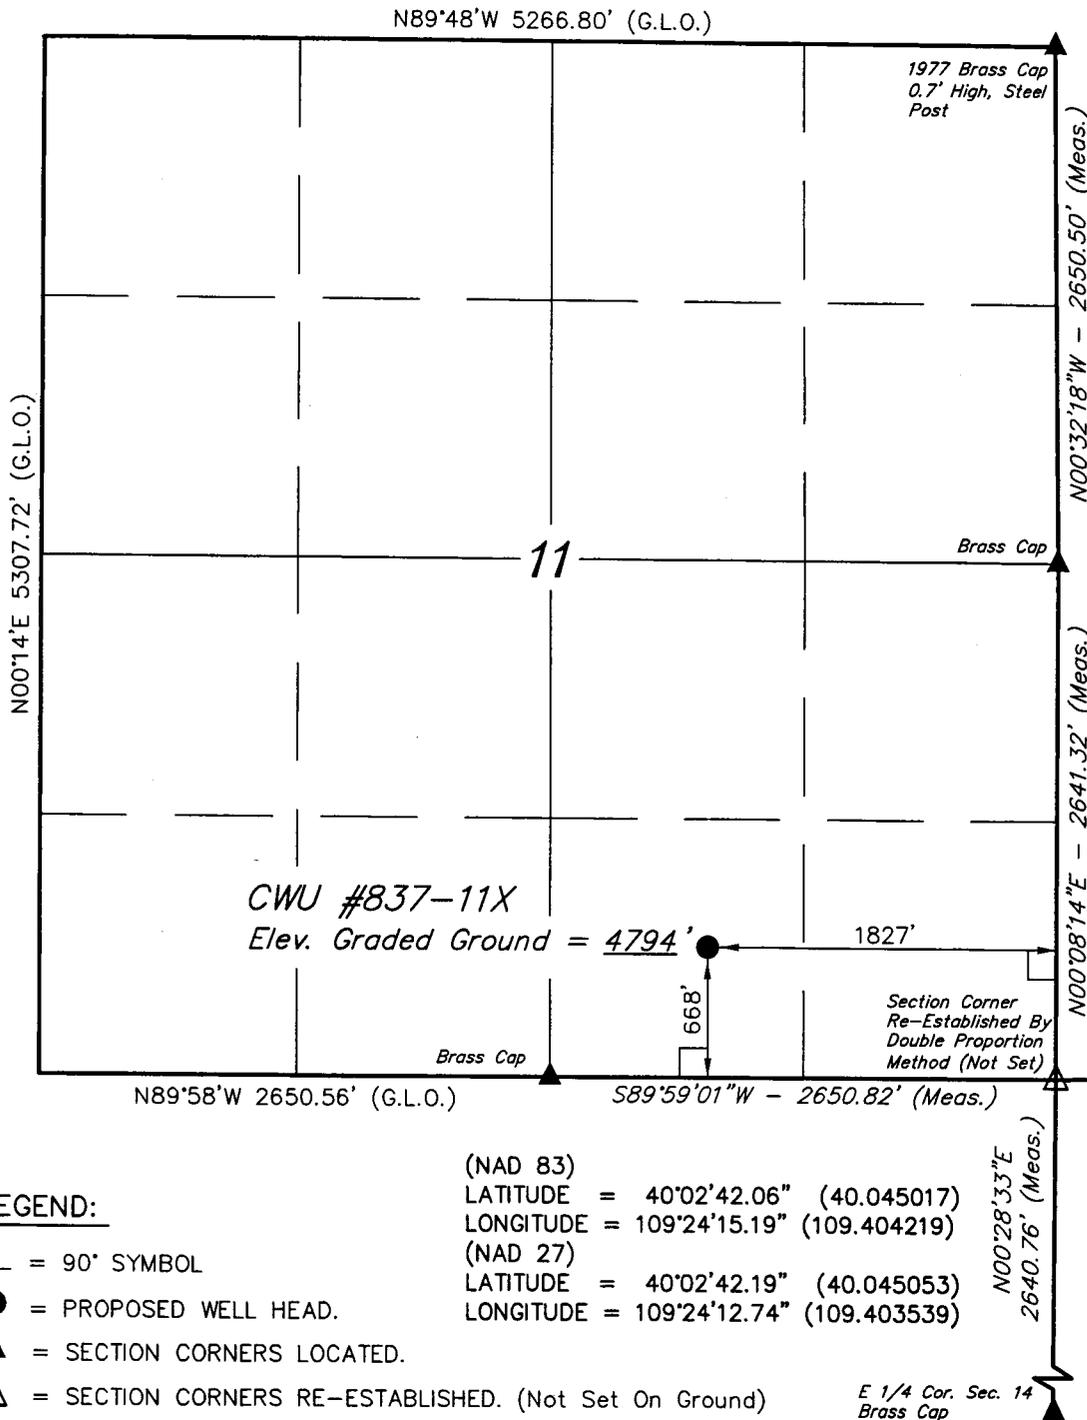

SCALE

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

S 1/4 Sec. 12
1977 Brass Cap 0.5'
High, Loose Stones

John A. ...
REGISTERED LAND SURVEYOR
REGISTRATION NO. 161319
STATE OF UTAH

LEGEND:

- = 90° SYMBOL
- = PROPOSED WELL HEAD.
- = SECTION CORNERS LOCATED.
- = SECTION CORNERS RE-ESTABLISHED. (Not Set On Ground)

(NAD 83)
LATITUDE = 40°02'42.06" (40.045017)
LONGITUDE = 109°24'15.19" (109.404219)
(NAD 27)
LATITUDE = 40°02'42.19" (40.045053)
LONGITUDE = 109°24'12.74" (109.403539)

E 1/4 Cor. Sec. 14
Brass Cap

UINTAH ENGINEERING & LAND SURVEYING
85 SOUTH 200 EAST - VERNAL, UTAH 84078
(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 03-16-06	DATE DRAWN: 03-16-06
PARTY D.A. T.A. D.R.B.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE EOG RESOURCES, INC.	

EIGHT POINT PLAN

CHAPITA WELLS UNIT 837-11X
SW/NE, SEC. 11, T9S, R22E, S.L.B.&M..
UINTAH COUNTY, UTAH

1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:

FORMATION	DEPTH (KB)
Green River	1,868'
Wasatch	4,852'
North Horn	6,717'
Island	6,945'
KMV Price River	7,291'
KMV Price River Middle	8,126'
KMV Price River Lower	8,859'
Sego	9,335'

Estimated TD: **9,500' or 165'± below Se-go top**

Anticipated BHP: 5,190 Psig

1. Fresh Waters may exist in the upper, approximately 1,000 ft ± of the Green River Formation, with top at about 2,000 ft ±.
2. Cement isolation is installed to surface of the well isolating all zones by cement.

3. PRESSURE CONTROL EQUIPMENT:

Production Hole – 5000 Psig
BOP schematic diagrams attached.

4. CASING PROGRAM:

	<u>HOLE SIZE</u>	<u>INTERVAL</u>	<u>SIZE</u>	<u>WEIGHT</u>	<u>GRADE</u>	<u>THREAD</u>	<u>RATING FACTOR</u>		
							<u>COLLAPSE</u>	<u>BURST</u>	<u>TENSILE</u>
Conductor:	17 ½"	0' – 60'	13 ⅜"	48.0#	H-40	STC	770 PSI	1730 PSI	322,000#
Surface	12-1/4"	45' – 2,300'KB±	9-5/8"	36.0#	J-55	STC	2020 PSI	3520 Psi	394,000#
Production:	7-7/8"	2,300'± – TD	4-½"	11.6#	N-80	LTC	6350 PSI	7780 Psi	223,000#

Note: 12-¼" surface hole will be drilled to a total depth of 200'± below the base of the Green River lost circulation zone and cased w/9-5/8" as shown to that depth. Drilled depth may be shallower or deeper than the 2300' shown above depending on the actual depth of the loss zone. All casing will be new or inspected.

5. Float Equipment:

Surface Hole Procedure (0'- 2300'±)

Guide Shoe

Insert Float Collar (PDC drillable)

Centralizers: 1-5' above shoe, top of jts. #2 and #3 then every 5th joint to surface. (15 total)

EIGHT POINT PLAN

CHAPITA WELLS UNIT 837-11X SW/NE, SEC. 11, T9S, R22E, S.L.B.&M.. UINTAH COUNTY, UTAH

Float Equipment: (Cont'd)

Production Hole Procedure (2300'± - TD):

Float shoe, 1 joint casing, float collar and balance of casing to surface. 4-½", 11.6#, N-80 or equivalent marker collars or short casing joints to be placed at top of Price River and 400' above top of Wasatch. Centralizers to be placed 5' above shoe on joint #1, top of joint #2, and every 2nd joint to 400' above Wasatch Island top. Thread lock float shoe, top and bottom of float collar, and top of 2nd joint.

6. MUD PROGRAM

Surface Hole Procedure (Surface - 2300'±):

Air/air mist or aerated water.

Production Hole Procedure (2300'± - TD): Anticipated mud weight 9.5 – 10.5 ppg depending on actual wellbore conditions encountered while drilling.

2300'± - TD A closed mud system will be utilized. A bentonite gelled water mud system will be used to control viscosity w/PHPA polymer used for supplemental viscosity and clay encapsulation/inhibition. Water loss will be maintained at <15cc's using white starch or PAC. Bactericides will be used as needed. Anticipated pH will range from 9.0-10.0. Mud weight will be adjusted as necessary for well control. Deflocculants/thinners will be used as necessary to maintain mud quality. LCM sweeps will be utilized as necessary to control lost circulation and mud loss. CO2 contamination, if encountered, will be treated with lime and gypsum.

7. VARIANCE REQUESTS:

Reference: Onshore Oil and Gas Order No. 2 – Item E: Special Drilling Operations

EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. Due to reduce location excavation, the blooie line will be approximately 75' in length

8. EVALUATION PROGRAM:

Logs: Mud log from base of surface casing to TD.
Cased-hole Logs: Cased-hole logs will be run in lieu of open-hole logs consisting of the following:
Cement Bond / Casing Collar Locator and Pulsed Neutron

EIGHT POINT PLAN

CHAPITA WELLS UNIT 837-11X
SW/NE, SEC. 11, T9S, R22E, S.L.B.&M..
UINTAH COUNTY, UTAH

9. CEMENT PROGRAM:

Surface Hole Procedure (Surface - 2300'±):

Lead: Class "G" cement with 16% Gel, 10 #/sx Gilsonite, 3% Salt, 2% CaCl₂, 3 lb/sx GR3 ¼ #/sx Flocele mixed at 11 ppg, 3.82 ft³/sk. yield, 23 gps water.

Tail: Class "G" cement with 2% CaCl₂, ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft³/sk., 5.2 gps water.

Top Out: As necessary with Class "G" cement with 2% CaCl₂, ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft³/sk., 5.2 gps water.

Note: Cement volumes will be calculated to bring lead cement to surface and tail cement to 500' above the casing shoe.

Production Hole Procedure (2300'± - TD)

Lead: 144 sks: Hi-Lift "G" w/12% D20 (Bentonite), 1% D79 (Extender), 5% D44 (Salt), 0.2% D46 (Antifoam), 0.25% D112 (Fluid Loss Additive), 0.25 pps D29 (cello flakes) mixed at 11.0 ppg, 3.91 ft³/sk., 24.5 gps water.

Tail: 900 sks: 50:50 Poz "G" w/ 2% D20 (Bentonite), 0.1% D46 (Antifoam), 0.075% D13 (Retarder), 0.2% D167 (Fluid Loss Additive), 0.2% D65 (Dispersant), mixed at 14.1 ppg, 1.28 ft³/sk., 5.9 gps water.

Note: The above number of sacks is based on gauge-hole calculation.
Lead volume to be calculated to bring cement to 200'± above 9-5/8" casing shoe.
Tail volume to be calculated to bring cement to 400'± above top of Wasatch.
Final Cement volumes will be based upon gauge-hole plus 45% excess.

10. ABNORMAL CONDITIONS:

Surface Hole (Surface - 2300'±):

Lost circulation

Production Hole (2300'± - TD):

Sloughing shales, lost circulation and key seat development are possible in the Wasatch Formation.

EIGHT POINT PLAN

CHAPITA WELLS UNIT 837-11X
SW/NE, SEC. 11, T9S, R22E, S.L.B.&M..
UINTAH COUNTY, UTAH

11. STANDARD REQUIRED EQUIPMENT:

- A. Choke Manifold
- B. Upper and Lower Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

12. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

(Attachment: BOP Schematic Diagram)

**CONDITIONS OF APPROVAL
FOR THE SURFACE USE PROGRAM OF THE
APPLICATION FOR PERMIT TO DRILL**

Company/Operator: EOG Resources, Inc.
Well Name & Number: Chapita Wells Unit 837-11
Lease Number: U-0281
Location: 662' FSL & 1831' FEL, SW/SE, Sec. 11,
T9S, R22E, S.L.B.&M., Uintah County, Utah
Surface Ownership: Federal

NOTIFICATION REQUIREMENTS

Location Construction - forty-eight (48) hours prior to construction of location and access roads.

Location Completion - prior to moving on the drilling rig.

Spud Notice: - at least twenty-four (24) hours prior to spudding the well.

Casing String and Cementing - twenty-four (24) hours prior to running casing and cementing all casing strings.

BOP and related Equipment Tests - twenty-four (24) hours prior to running casing and tests.

First Production Notice - within five (5) business days after new Well begins or production resumes after Well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

THIRTEEN POINT SURFACE USE PROGRAM

1. EXISTING ROADS

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 17.99 miles southeast of Ouray, Utah - See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

2. PLANNED ACCESS ROAD

- A. The access road will be approximately 200 feet in length. See attached TOPO Map "B".
- B. The access road has a 30 foot ROW w/ 18 foot running surface.
- C. Maximum grade on access road will be 8%.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No culverts, bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of-Way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by run off water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, EOG Resources, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

3. **LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION**

- A. Abandoned wells - 4*
- B. Producing wells - 41*
- C. Shut in wells - 3*

(*See attached TOPO map "C" for location)

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

A. **ON WELL PAD**

- 1. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of wellhead valves, combo separator-dehy unit with meter, 300 Bbl vertical or 200 Bbl low profile, condensate tank, and attaching piping.
- 2. Gas gathering lines - A 4" gathering line will be buried from dehy to the edge of the location.

B. **OFF WELL PAD**

- 1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
- 2. Protective measures and devices for livestock and wildlife will be taken and/or installed where required.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery.

The production facilities will be placed on the East side of the location.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within 6 months of installation. Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

The required paint color is Carlsbad Canyon.

If at any time the facilities located on public land and authorized by the terms of the lease are no longer included in the lease (due to a contraction in the unit or other lease or unit boundary change), BLM will process a

change in authorization to the appropriate statute. The authorization will be subject to appropriate rental or other financial obligation as determined by the authorized officer.

5. LOCATION & TYPE OF WATER SUPPLY

- A. Water supply will be from Ouray Municipal Water Plant at Ouray, Utah, and/or Target Trucking Inc.'s water source in the SW/SW, Sec. 35, T9S, R22E, Uintah County, Utah (State Water Right #49-1501). Produced water from the Chapita Wells and Stagecoach Units will also be used.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. SOURCE OF CONSTRUCTION MATERIAL

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of the location.
- B. All construction material will come from Federal Land.
- C. No mineral materials will be required.

7. METHODS OF HANDLING WASTE DISPOSAL

A. METHODS AND LOCATION

- 1. Cuttings will be confined in the reserve pit.
 - 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
 - 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah County Landfill.
 - 4. Produced wastewater will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. After the 90 day period, the produced water will be contained in a tank on location and then disposed of at one of the following three locations: Natural Buttes Unit 21-20B SWD, Ace Disposal, or EOG Resources, Inc. drilling operations (Chapita Wells Unit, Natural Buttes Unit & Stagecoach Unit).
 - 5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.
- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit or be removed and disposed of at an authorized disposal site. Introduction of well bore

hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

On BLM administered land:

The reserve pit will be constructed so as not to leak, break, or allow discharge. If the reserve pit requires padding prior to lining (due to rocky conditions) felt padding will be used.

The reserve pit shall be lined with a plastic liner. A felt liner will also be installed if rock is encountered during pit construction.

8. ANCILLARY FACILITIES

A. No airstrips or camps are planned for this well.

9. WELLSITE LAYOUT

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The approved seed mixture for this location is:

- Four-Wing Salt Bush – 3 pounds per acre
- Indian Rice Grass – 2 pounds per acre
- Needle and Thread Grass – 2 pounds per acre
- Globe Mallow – 1 pound per acre
- Hi-Crest Crested Wheat Grass – 1 pound per acre.

The reserve pit will be located on the Southeast corner of the location. The flare pit will be located downwind of the prevailing wind direction on the South side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled pit topsoil will be stored separate from the location topsoil West of Corners B and 5. The stockpiled location topsoil will be stored East of Corner #3, as well as North of Corner #6. Upon completion of construction, the stockpiled topsoil from the location will be broadcast seeded with the approved seed mixture for this location and then walked down with a cat.

Access to the well pad will be from the West.

Corners #2, #6, & #8 will be rounded off to minimize excavation.

FENCING REQUIREMENTS:

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BLM or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is to be regularly traveled. If the well is a producer, the cattleguards (shall/shall not) be permanently mounted on concrete bases. Prior to crossing any fence located on Federal land, or any fence between Federal land and private land, the operator will contact the BLM, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

10. PLANS FOR RESTORATION OF SURFACE

A. PRODUCING LOCATION

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The stockpiled pit topsoil will then be spread over the pit area and broadcast seeded with the prescribed seed mixture for this location. The seeded area will then be walked down with a cat.

B. DRY HOLE/ABANDONED LOCATION

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BLM will attach the appropriate surface rehabilitation conditions of approval.

11. SURFACE OWNERSHIP

Access road: Federal

Location: Federal

12. OTHER INFORMATION

A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to:

- whether the materials appear eligible for the National Register of Historic Places;
- the mitigation measures the operator will likely have to undertake before the site can be used.
- a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

B. As operator, EOG Resources, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable

facilities. A list of noxious weeds will be obtained from the BLM, or the appropriate County Extension Office. On BLM administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.

- C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on BLM lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

Additional Surface Stipulations

None

LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION

PERMITTING AGENT

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Telephone: (435)789-4120
Fax: (435)789-1420


DRILLING OPERATIONS

Donald Presenkowski
EOG Resources, Inc.
P.O. Box 250
Big Piney, WY 83113
Telephone: (307)276-4865

All lease or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. EOG Resources, Inc. is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.


A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.

EOG RESOURCES 11" 5,000 PSI W.P. BOP CONFIGURATION

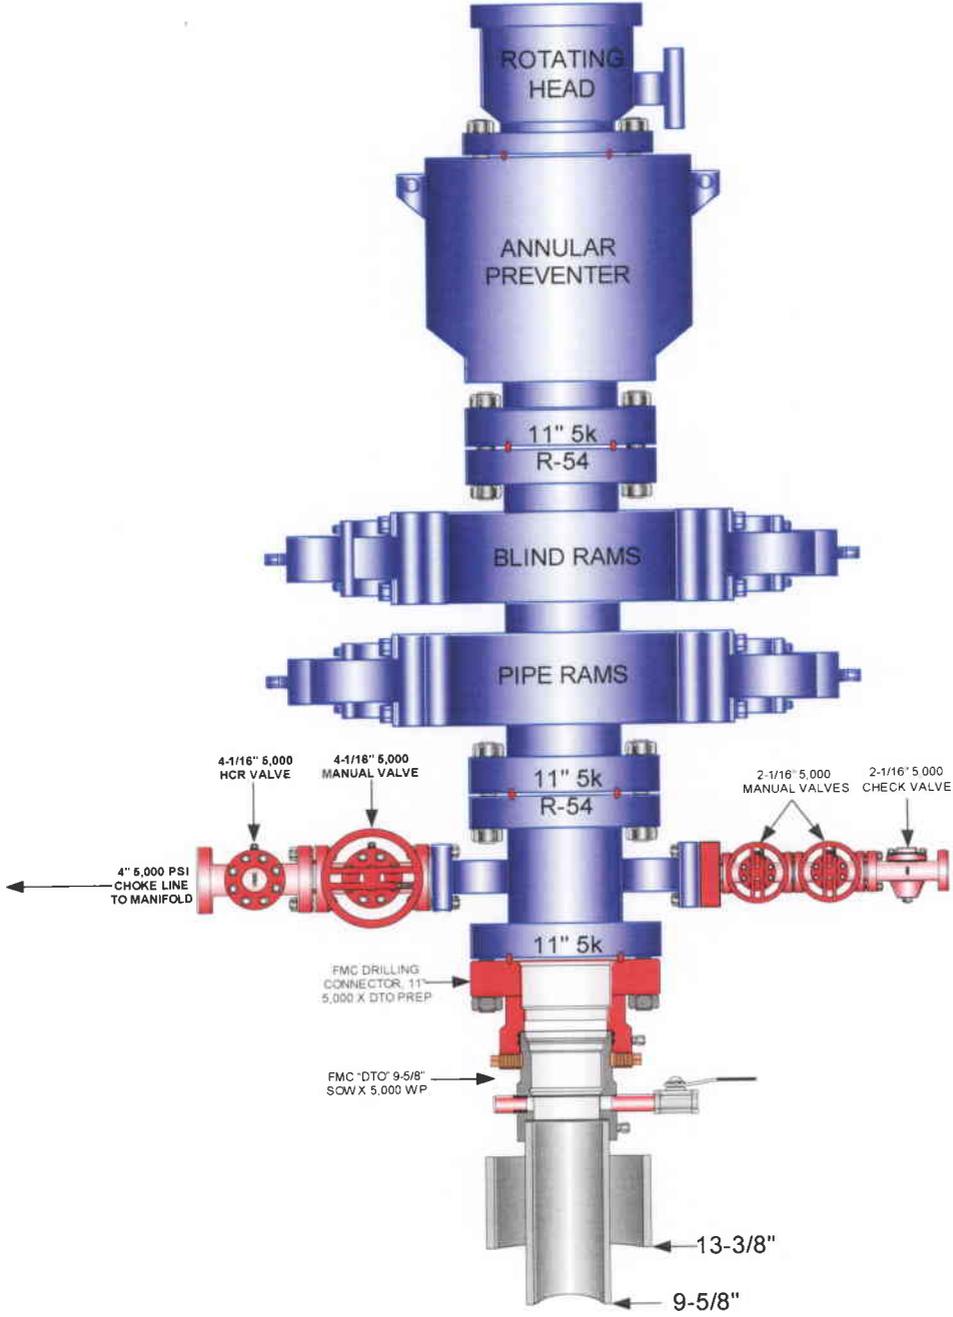

EOG RESOURCES CHOKE MANIFOLD CONFIGURATION
W/ 5,000 PSI WP VALVES

PAGE 2 OF

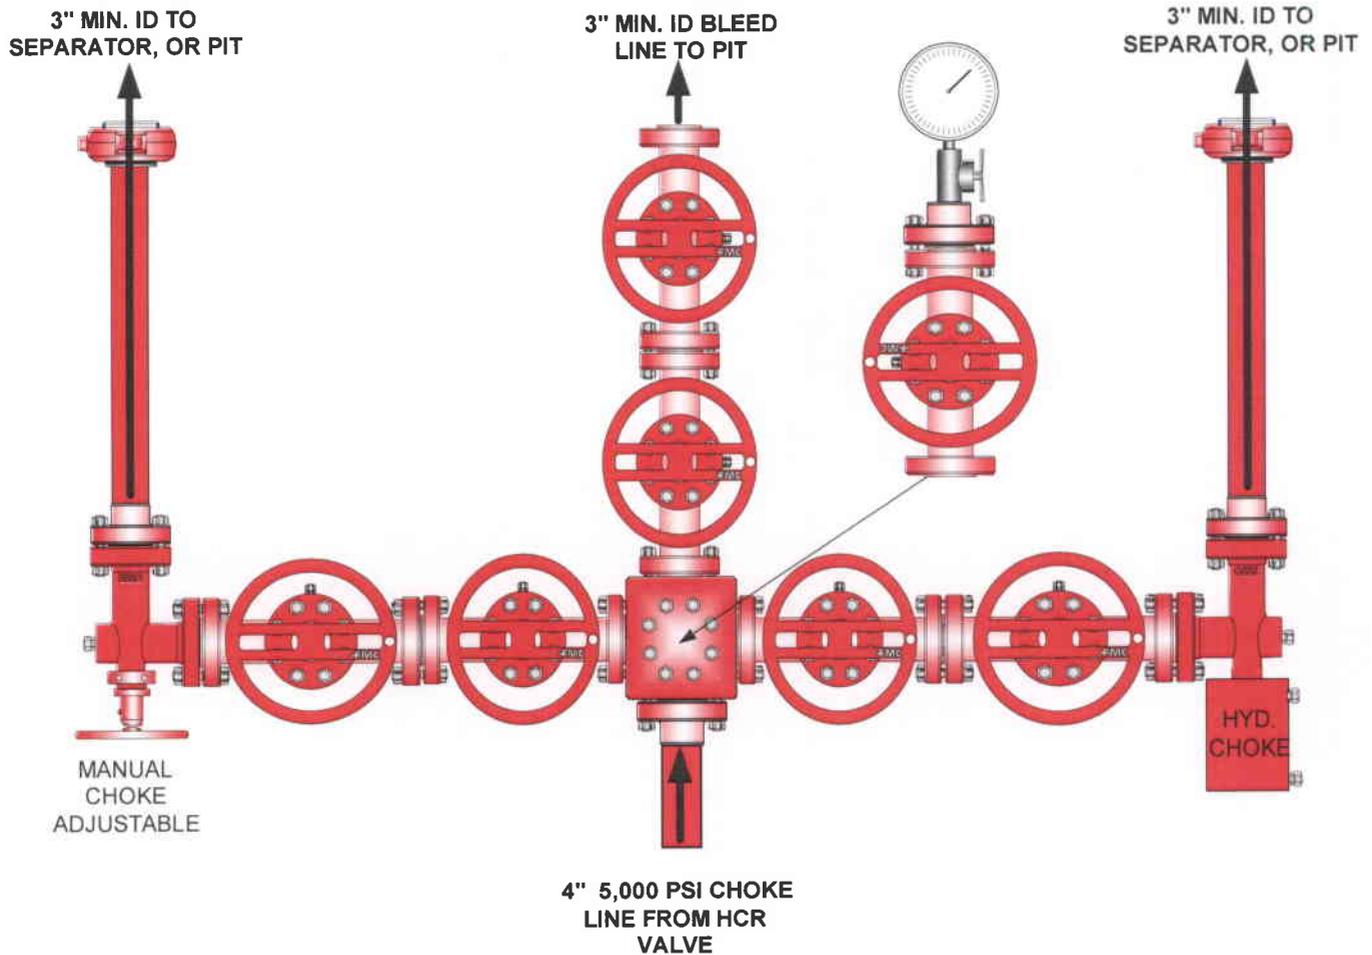

Testing Procedure:

1. BOP will be tested with a professional tester to conform to Onshore Order #2.
2. Blind and Pipe rams will be tested to rated working pressure, 5,000 psi.
3. Annular Preventer will be tested to 50% working pressure, 2,500 psi. Casing will be tested to 0.22 psi / ft. or 1,500 psi. Not to exceed 70% of burst strength, **whichever is greater.**
4. All lines subject to well pressure will be tested to the same pressure as blind and pipe rams.
5. All BOPE specifications and configurations will meet Onshore Order #2 requirements.

EOG RESOURCES, INC.

CWU #837-11X

LOCATED IN UINTAH COUNTY, UTAH
SECTION 11, T9S, R22E, S.L.B.&M.

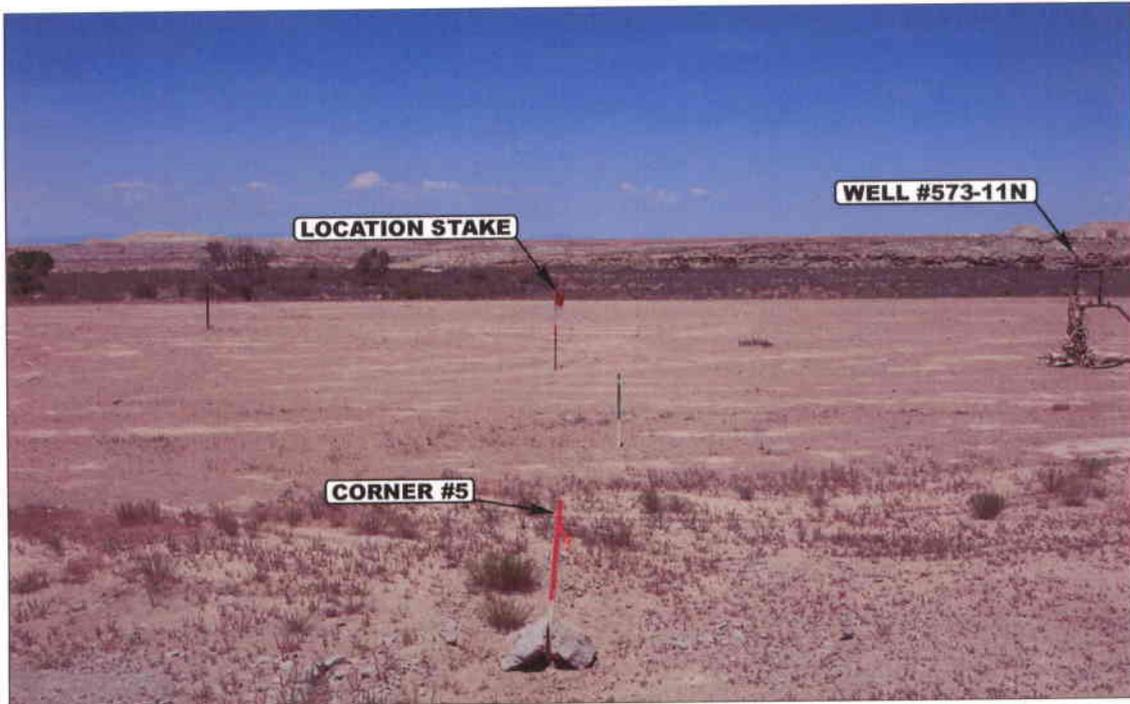


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHERLY

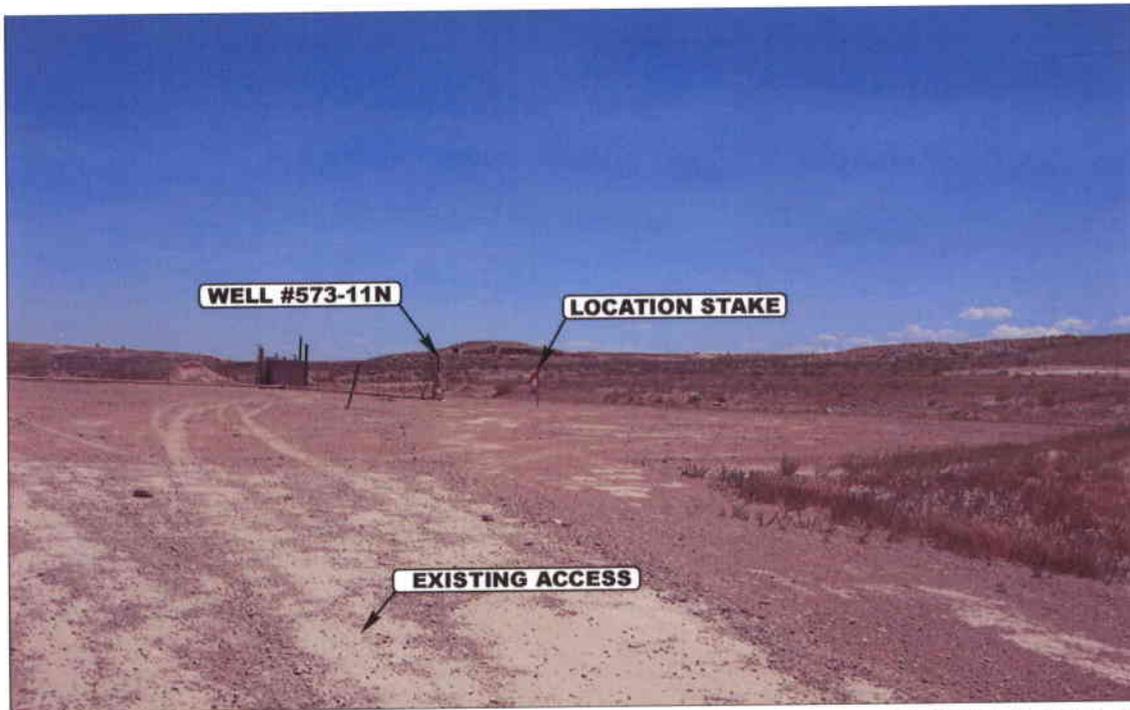


PHOTO: VIEW OF EXISTING ACCESS

CAMERA ANGLE: EASTERLY



UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

07 01 04
MONTH DAY YEAR

PHOTO

TAKEN BY: D.A.

DRAWN BY: P.M.


REVISED: 03-16-06

EOG RESOURCES, INC.

LOCATION LAYOUT FOR

CWU #837-11X
SECTION 11, T9S, R22E, S.L.B.&M.
668 FSL 1827' FEL

Existing Access Road



Existing Road

F-6.4'
El. 788.2'

Sta. 3+25

SCALE: 1" = 50'
DATE: 07-08-04
Drawn By: D.COX
Revised: 03-16-06 D.R.B.

C-8.2'
El. 802.8'

C-2.7'
El. 797.3'

Round Corners
as needed

Exist. Topsoil Pile
(To Be Moved)

NOTE:
Flare Pit is to
be located a min.
of 100' from the
Well Head.


Approx.
Top of
Cut Slope

Approx.
Toe of
Fill Slope

Sta. 1+50

F-2.8'
El. 791.8'

Sta. 0+00

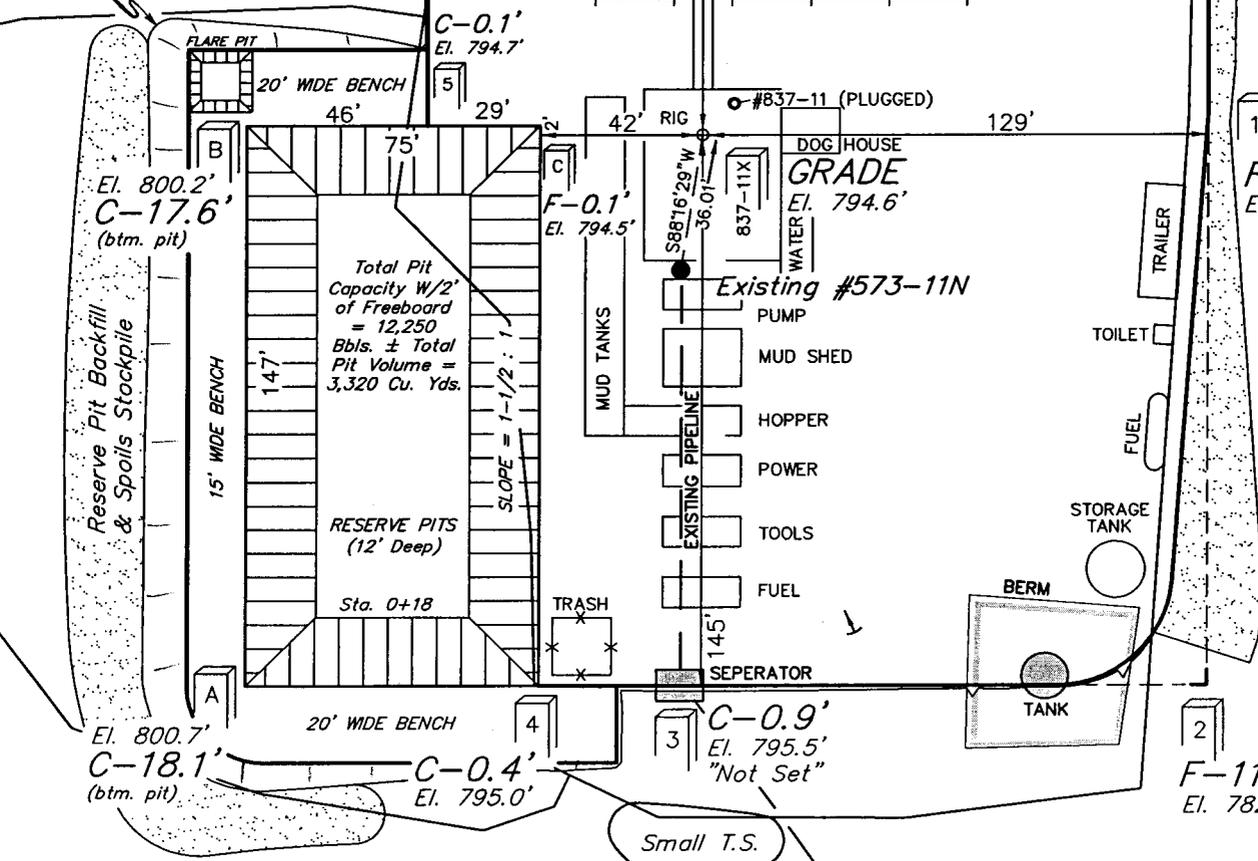

Total Pit
Capacity W/2'
of Freeboard
= 12,250
Bbls. ± Total
Pit Volume =
3,320 Cu. Yds.

RESERVE PITS
(12' Deep)

Sta. 0+18

Small T.S.

FIGURE #1

NOTES:
Elev. Graded Ground at Location Stake = 4794.3'

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017


EOG RESOURCES, INC.

TYPICAL CROSS SECTIONS FOR

CWU #837-11X
SECTION 11, T9S, R22E, S.L.B.&M.
668 FSL 1827' FEL

1" = 20'
X-Section Scale
1" = 50'

DATE: 07-08-04
Drawn By: D.COX
Revised: 03-16-06 D.R.B.

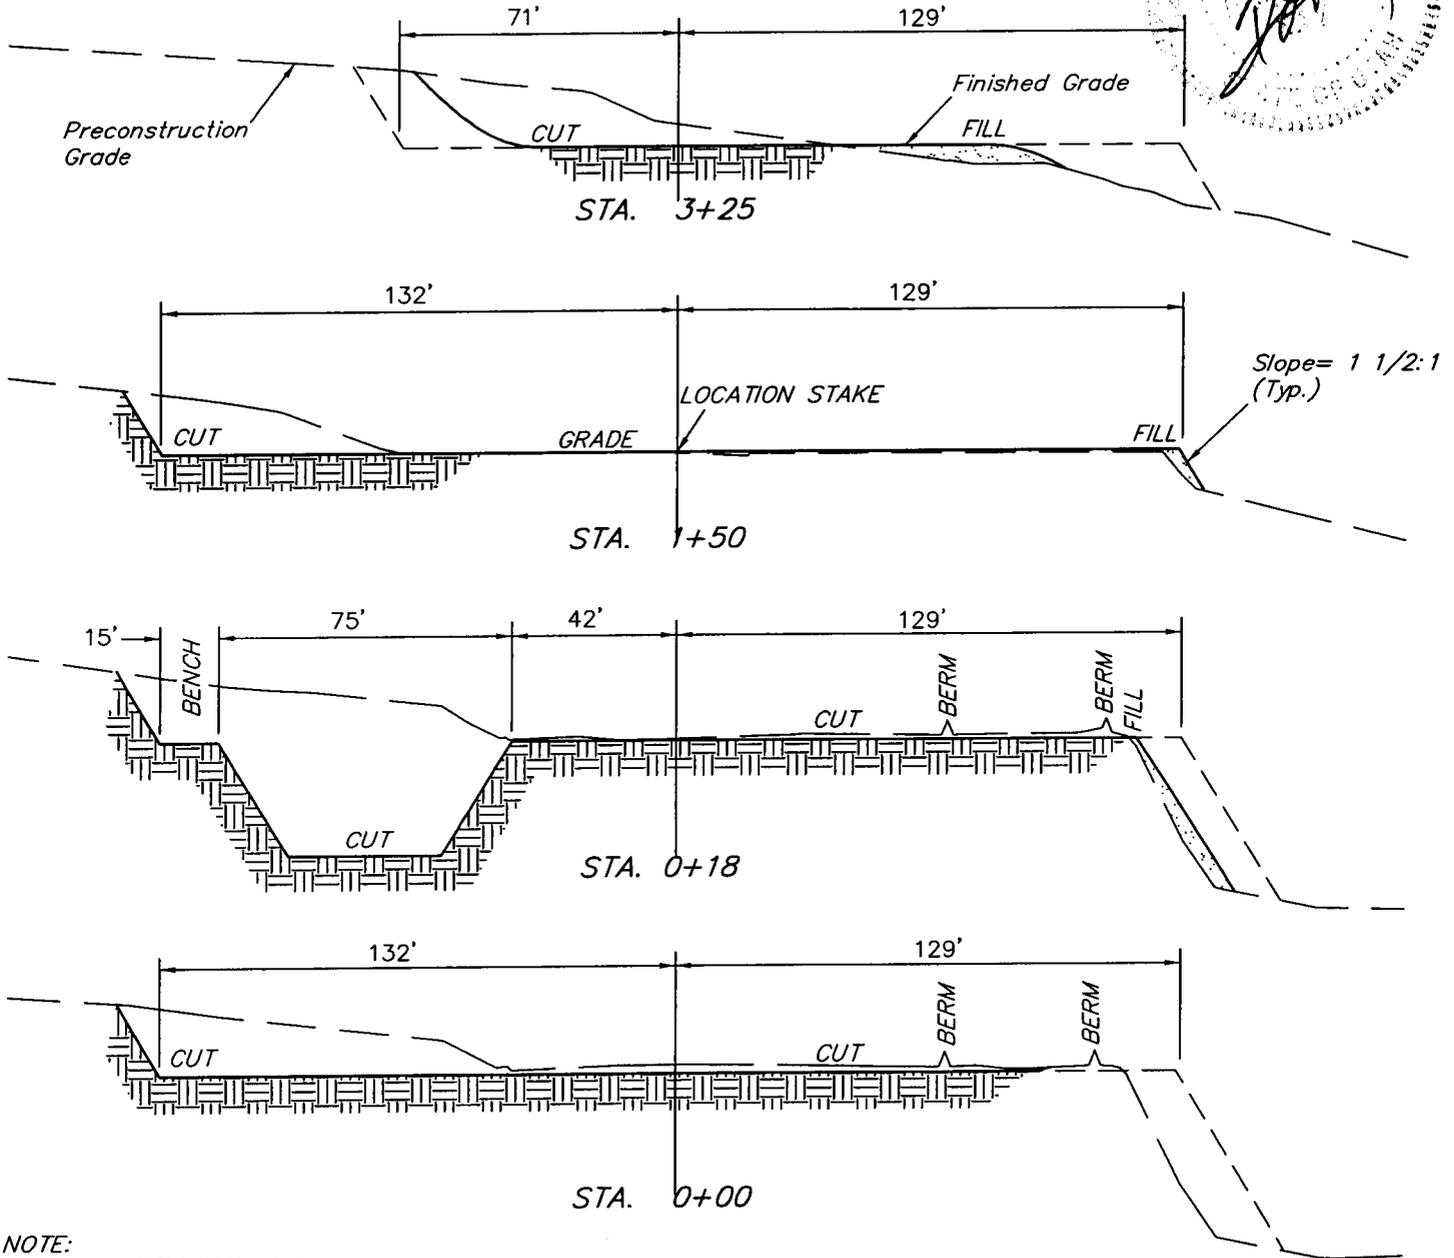


* NOTE:
FILL QUANTITY INCLUDES
5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 460 Cu. Yds.
"NEW CONSTRUCTION ONLY"	
Remaining Location	= 6,430 Cu. Yds.
TOTAL CUT	= 6,890 CU.YDS.
FILL	= 1,510 CU.YDS.

EXCESS MATERIAL	=	5,380 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	=	2,120 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	=	3,260 Cu. Yds.

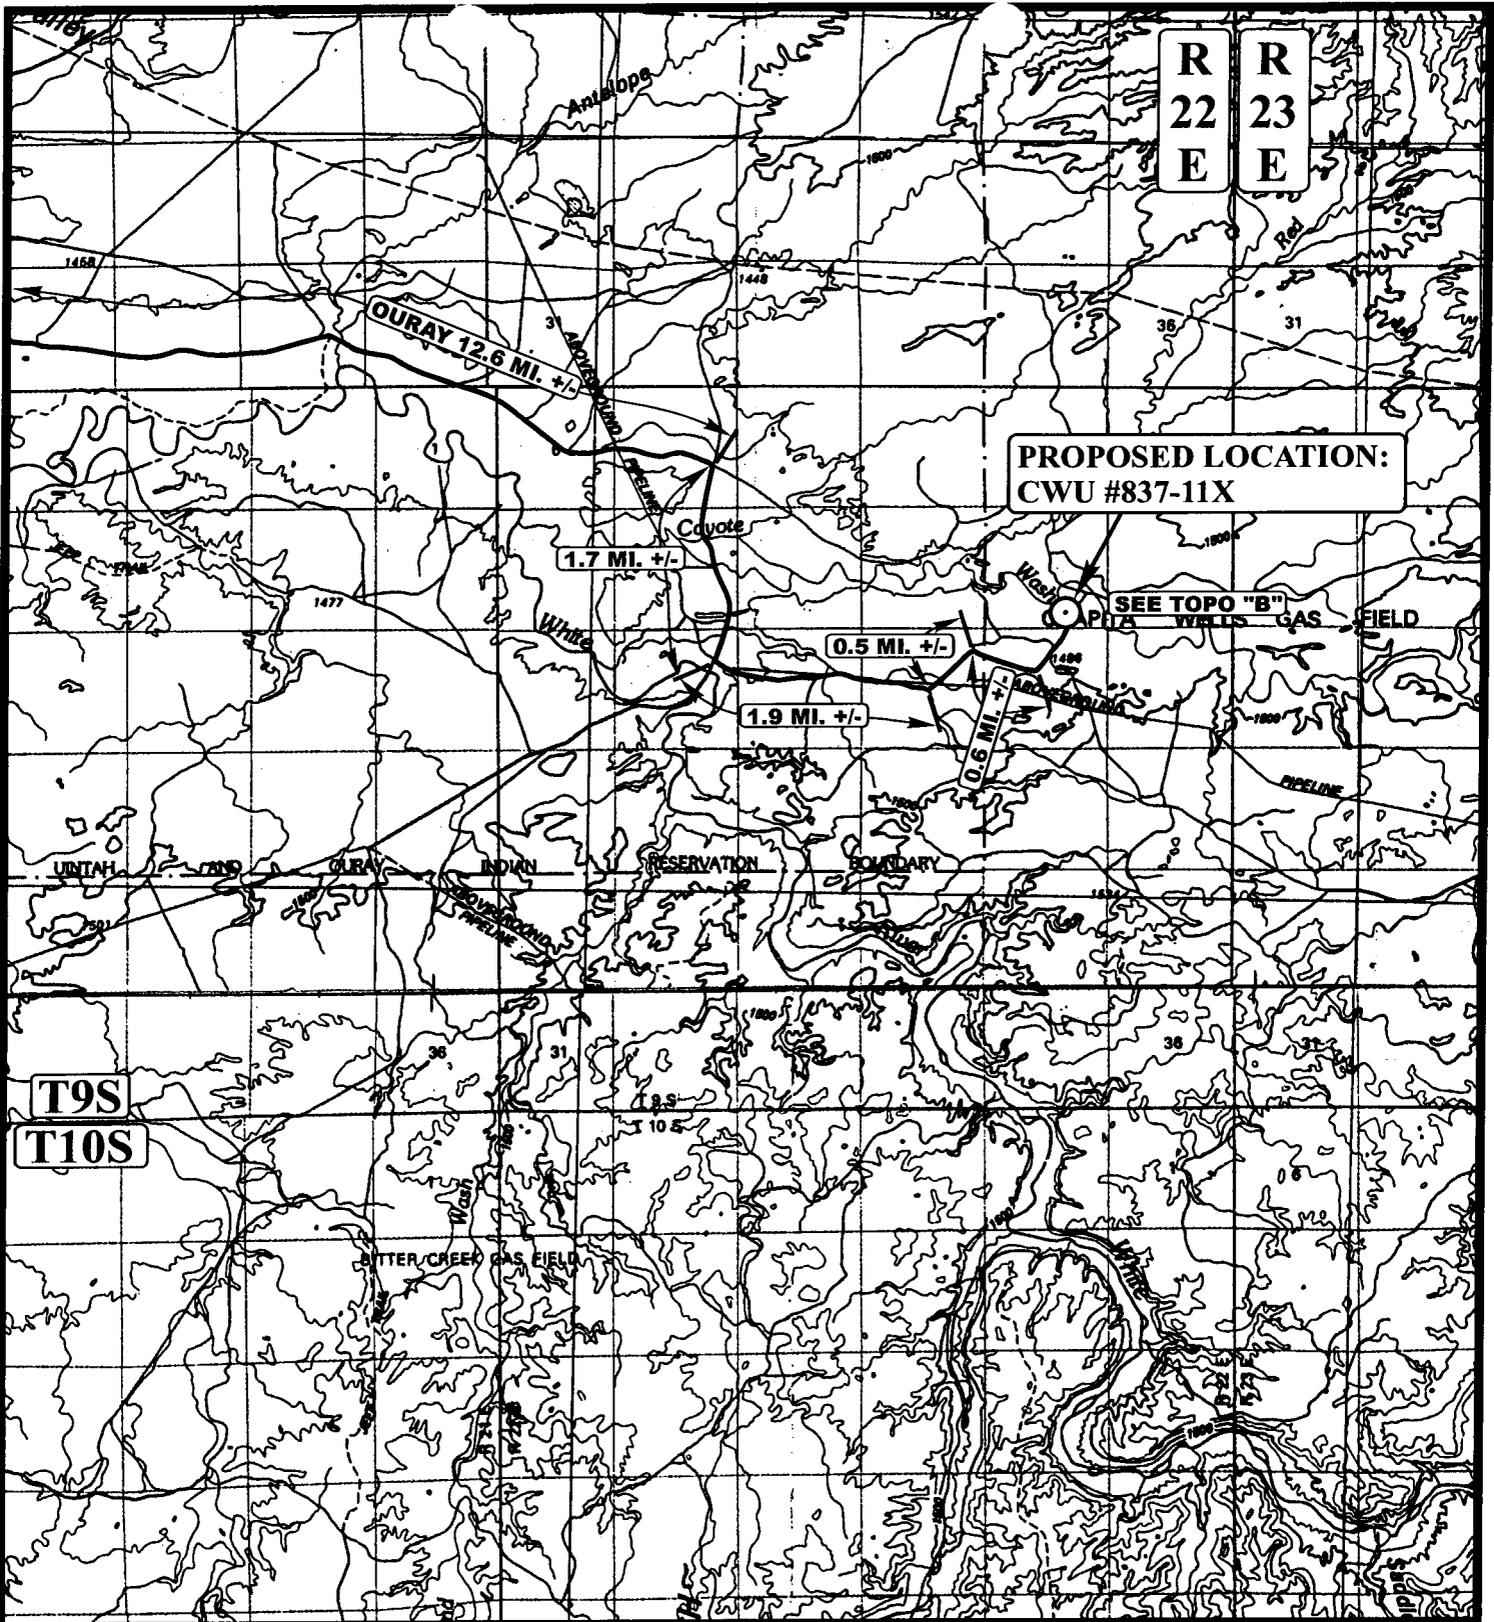

R
22
E

R
23
E

**PROPOSED LOCATION:
CWU #837-11X**

SEE TOPO "B" WELLS GAS FIELD

T9S
T10S

LEGEND:

⊙ PROPOSED LOCATION

EOG RESOURCES, INC.

**CWU #837-11X
SECTION 11, T9S, R22E, S.L.B.&M.
668' FSL 1827' FEL**



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813




TOPOGRAPHIC MAP 07 01 04
MONTH DAY YEAR
SCALE: 1:100,000 DRAWN BY: P.M. REVISED: 03-16-06



R
22
E

R
23
E

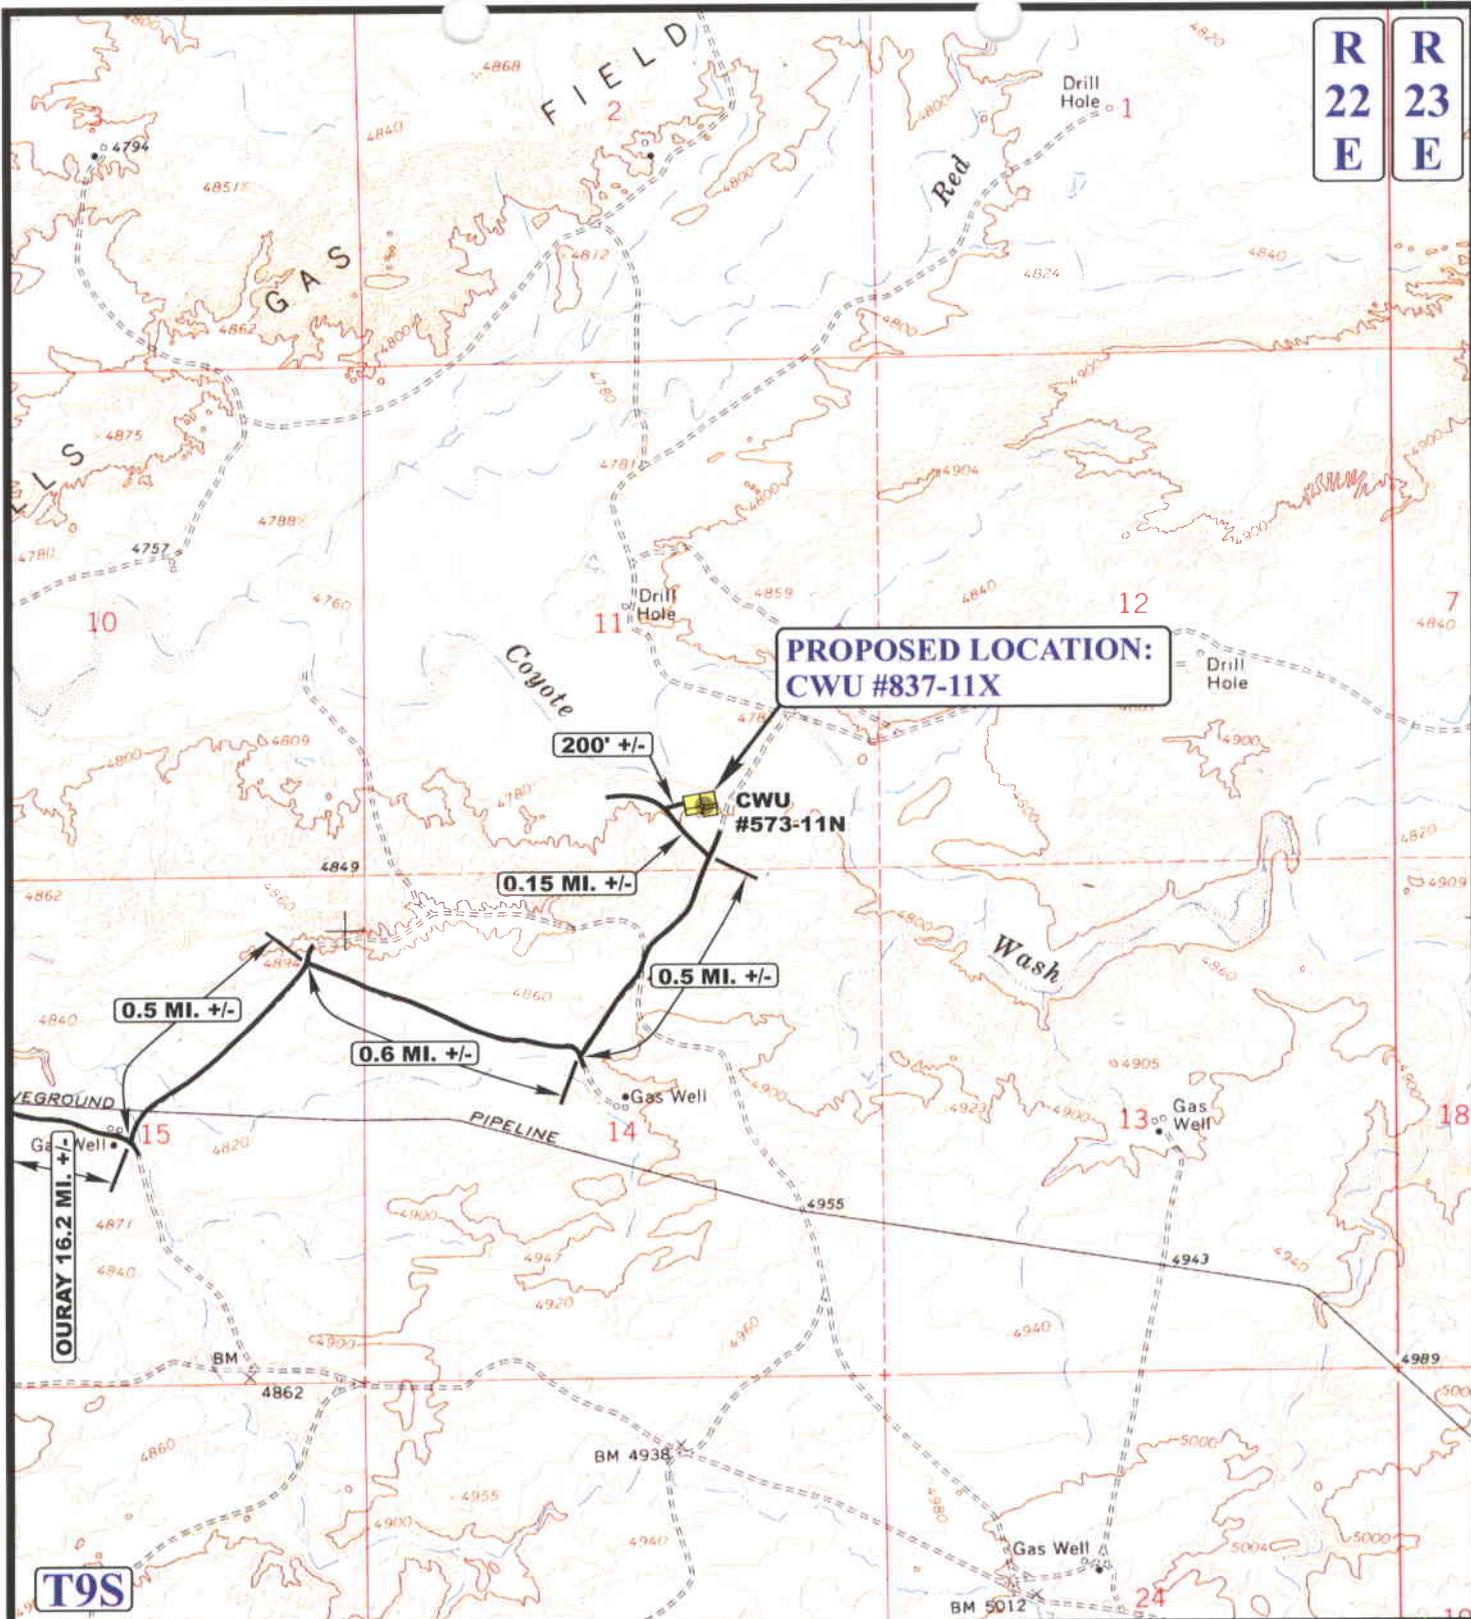

LEGEND:

————— EXISTING ROAD



EOG RESOURCES, INC.

CWU #837-11X
SECTION 11, T9S, R22E, S.L.B.&M.
668' FSL 1827' FEL



Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**

07 01 04
MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: P.M. REVISED: 03-16-06

**B
TOPO**

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 03/27/2006

API NO. ASSIGNED: 43-047-37942

WELL NAME: CWU 837-11X(RIGSKID)
 OPERATOR: EOG RESOURCES INC (N9550)
 CONTACT: KAYLENE GARDNER

PHONE NUMBER: 435-789-0790

PROPOSED LOCATION:

SWSE 11 090S 220E
 SURFACE: 0668 FSL 1827 FEL
 BOTTOM: 0668 FSL 1827 FEL
 COUNTY: UINTAH
 LATITUDE: 40.04513 LONGITUDE: -109.4036
 UTM SURF EASTINGS: 636183 NORTHINGS: 4433777
 FIELD NAME: NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal
 LEASE NUMBER: U-0281
 SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: PRRV
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. NM-2308)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 49-1501)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)

LOCATION AND SITING:

- R649-2-3.
- Unit: CHAPITA WELLS *OK*
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: 179-8
Eff Date: 8-10-99
Siting: Suspension General Siting
- R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: 1- Federal Approval

2- OIL SHALE

CWU 1156-1

CWU 570-2I

CWU 486-2I

CWU 630-2

CWU 410-2N

CWU 37-II

T9S R22E

CWU 442-III

CWU 1176-10

CWU 533-10I

CWU 320-II

CWU 320-IX (RIG-SKID)

CWU 441-III

CWU 555-10I

CWU 556-III

CWU 632-II

CWU 229-12

CWU 980-12

CWU 443-III

CWU 531-III

CWU 592-III

CWU 15

CWU 593-III

II

NATURAL BUTTES FIELD CHAPITA WELLS UNIT

CAUSE: 179-8 / 8-10-1999

CWU 574-12N

○

CWU 971-II

CWU 439-II

CWU 530-III

CWU 43-II

CWU 837-IX (RIGSKID)

CWU 837-II

CWU 573-IIN

CWU 594-10I

CWU 836-II

CWU 409-IIN

CWU 315-III

CWU 576-14I

CWU 42-13

CWU 633-14

CWU 230-14

CWU 1061-14

CWU 974-14

CWU 580-14I


OPERATOR: EOG RESOURCES INC (N9550)

SEC: 11 T. 9S R. 22E

FIELD: NATURAL BUTTES (630)

COUNTY: UINTAH

CAUSE: 179-8 / 8-10-1999



Utah Oil Gas and Mining

- Field Status**
- ABANDONED
 - ACTIVE
 - COMBINED
 - INACTIVE
 - PROPOSED
 - STORAGE
 - TERMINATED

- Unit Status**
- EXPLORATORY
 - GAS STORAGE
 - NF PP OIL
 - NF SECONDARY
 - PENDING
 - PI OIL
 - PP GAS
 - PP GEOTHERML
 - PP OIL
 - SECONDARY
 - TERMINATED

- Wells Status**
- GAS INJECTION
 - GAS STORAGE
 - LOCATION ABANDONED
 - NEW LOCATION
 - PLUGGED & ABANDONED
 - PRODUCING GAS
 - PRODUCING OIL
 - SHUT-IN GAS
 - SHUT-IN OIL
 - TEMP. ABANDONED
 - TEST WELL
 - WATER INJECTION
 - WATER SUPPLY
 - WATER DISPOSAL
 - DRILLING



PREPARED BY: DIANA WHITNEY
DATE: 29-MARCH-2006



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

March 30, 2006

EOG Resources, Inc.
P O Box 1815
Vernal, UT 84078

Re: Chapita Wells Unit 837-11X Well, 668' FSL, 1827' FEL, SW SE, Sec. 11,
T. 9 South, R. 22 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-37942.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: EOG Resources, Inc.

Well Name & Number Chapita Wells Unit 837-11X

API Number: 43-047-37942

Lease: U-0281

Location: SW SE **Sec.** 11 **T.** 9 South **R.** 22 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

5. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE- Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator **EOG RESOURCES, INC.**

3a. Address
P.O. BOX 250 Big Piney WY, 83113

3b. Phone No. (include area code)
307-276-3331

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

**SWSE SECTION 11, T9S, R22E
 668 FSL 1827 FEL 40.045017 LAT 109.404219 LON**

5. Lease Serial No.

U-0281

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

CHAPITA WELLS UNIT

8. Well Name and No.

CHAPITA WELLS UNIT 837-11X

9. API Well No.

43-047-37942

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State

UINTAH, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Well Spud
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)


EOG Resources, Inc. spud a 20" surface hole at the referenced location 2/15/2006.

14. I hereby certify that the foregoing is true and correct
 Name (Printed/Typed)

Kaylene R. Gardner

Title **Regulatory Assistant**

Signature



Date

04/04/2006

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

RECEIVED

DIV. OF OIL, GAS & MINING

MAY 24 2006

FORM APPROVED
OMB No. 1004-0137
Expires March 31, 2007

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT


APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. U-0281
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator EOG RESOURCES, INC.		7. If Unit or CA Agreement, Name and No. CHAPITA WELLS UNIT
3a. Address P.O. Box 1815 Vernal Ut 84078		8. Lease Name and Well No. CHAPITA WELLS UNIT 837-11X
3b. Phone No. (include area code) 435-781-9111		9. API Well No. 43-047-37942
4. Location of Well (Report location clearly and in accordance with any State requirements.) At surface 668 FSL 1827 FEL 40.045017 LAT 109.404219 LON SWSE At proposed prod. zone SAME		10. Field and Pool, or Exploratory NATURAL BUTTES
14. Distance in miles and direction from nearest town or post office* 18 MILES SOUTHEAST OR OURAY, UTAH		11. Sec., T. R. M. or Blk. and Survey or Area SECTION 11, T9S, R22E S.L.B.&M
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 668'	16. No. of acres in lease 2558	17. Spacing Unit dedicated to this well
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 2890	19. Proposed Depth 9500	20. BLM/BIA Bond No. on file NM 2308
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 4794 GL	22. Approximate date work will start* 03/29/2006	23. Estimated duration 45 DAYS

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the BLM.

25. Signature 	Name (Printed/Typed) Kaylene R. Gardner	Date 03/24/2006
Title Regulatory Assistant		
Approved by (Signature) 	Name (Printed/Typed)	Date 04/04/2006
Title	Office	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

CONDITIONS OF APPROVAL ATTACHED

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)

NOTICE OF APPROVAL
RECEIVED
APR 06 2006
DIV. OF OIL, GAS & MINING

UDOGM



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East VERNAL, UT 84078 (435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: **EOG Resources, Inc.** Location: **SWSE, Sec 11, T9S, R22E**
Well No: **CWU 837-11X** Lease No: **UTU-0281**
API No: **43-047-37942** Agreement: **Chapita Wells Unit**

Petroleum Engineer:	Matt Baker	Office: 435-781-4490	Cell: 435-828-4470
Petroleum Engineer:	Michael Lee	Office: 435-781-4432	Cell: 435-828-7875
Supervisory Petroleum Technician:	Jamie Sparger	Office: 435-781-4502	Cell: 435-828-3913
Environmental Scientist:	Paul Buhler	Office: 435-781-4475	Cell: 435-828-4029
Environmental Scientist:	Karl Wright	Office: 435-781-4484	
Natural Resource Specialist:	Holly Villa	Office: 435-781-4404	
Natural Resource Specialist:	Melissa Hawk	Office: 435-781-4476	
After Hours Contact Number:	435-781-4513	Fax: 435-781-4410	

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a one-year period. An additional year extension may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

- Location Construction (Notify Paul Buhler) - Forty-Eight (48) hours prior to construction of location and access roads.
- Location Completion (Notify Paul Buhler) - Prior to moving on the drilling rig.
- Spud Notice (Notify Petroleum Engineer) - Twenty-Four (24) hours prior to spudding the well.
- Casing String & Cementing (Notify Jamie Sparger) - Twenty-Four (24) hours prior to running casing and cementing all casing strings.
- BOP & Related Equipment Tests (Notify Jamie Sparger) - Twenty-Four (24) hours prior to initiating pressure tests.
- First Production Notice (Notify Petroleum Engineer) - Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

1. No new construction or drilling will be allowed from April 1 - July 15. If construction/drilling are proposed during this time frame, a nest survey will need to be completed after May 31. If the nests were determined to be inactive, then construction/drilling can begin.

DOWNHOLE CONDITIONS OF APPROVAL

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

SITE SPECIFIC DOWNHOLE CONDITIONS OF APPROVAL

1. A variance is granted for O.O. #2 III. E. 1; Blooie line can be 75'.
2. A surface casing shoe integrity test shall be performed.
3. Production casing cement top shall be 200' above the surface casing shoe.
4. A cement bond log shall be run from TD to the base of the surface shoe and a field copy shall be furnished to this office.

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

1. There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well. Any changes in operation must have prior approval from the BLM, Vernal Field Office Petroleum Engineers.
2. The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
3. **Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.**
4. Blowout prevention equipment (BOPE) will remain in use until the well is completed or abandoned. Closing unit controls must remain unobstructed and readily accessible at all times. Choke manifolds must be located outside of the rig substructure.

All BOPE components will be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests must be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test must be reported in the driller's log.

BOP drills must be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.

Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.

No aggressive/fresh hard-banded drill pipe shall be used within casing.

5. All shows of fresh water and minerals will be reported and protected. A sample will be taken of any water flows and a water analysis furnished the BLM, Vernal Field Office. All oil and gas shows will be adequately tested for commercial possibilities, reported, and protected.
6. No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the BLM, Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM, Vernal Field Office must be obtained and notification given before resumption of operations.
7. Chronologic drilling progress reports must be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.

Any change in the program must be approved by the BLM, Vernal Field Office. "Sundry Notices and Reports on Wells" (Form BLM 3160-5) must be filed for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Emergency approval may be obtained orally, but such approval does not waive the written report requirement. Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, will require the filing of a suitable plan pursuant to Onshore Oil & Gas Order No. 1 of 43 CFR 3164.1 and prior approval by the BLM, Vernal Field Office.

In accordance with 43 CFR 3162.4-3, this well must be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.

8. Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) will be submitted only when requested by the BLM, Vernal Field Office.

Please submit an electronic copy of all logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM. The cement bond log must be submitted in raster format (TIF, PDF other).

9. All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the BLM, Vernal Field Office.

All measurement points shall be identified as point of sales or allocation for royalty determination prior to the installation of facilities.

10. Oil and gas meters will be calibrated in place prior to any deliveries. The Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the BLM, Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement.
11. A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM, Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
12. This APD is approved subject to the requirement that, should the well be successfully completed for production, the BLM, Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
- a. Operator name, address, and telephone number.
 - b. Well name and number.
 - c. Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - d. Date well was placed in a producing status (date of first production for which royalty will be paid).
 - e. The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - f. The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - g. Unit agreement and / or participating area name and number, if applicable.
 - h. Communitization agreement number, if applicable.
13. Any venting or flaring of gas will be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from Field Office Petroleum Engineers.
14. All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events as defined in NTL3A, will be reported

verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production

15. Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
16. Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: EOG RESOURCES Operator Account Number: N 9550
 Address: P.O. BOX 1815
city VERNAL
state UT zip 84078 Phone Number: (435) 781-9111

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
43-047-35203	CHAPITA WELLS UNIT 853-32		NENW	32	9S	23E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
B	99999	13884	4/13/2006		4/27/06		
Comments: <u>CALGT = MURD</u> — <u>K</u>							

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
43-047-36896	CHAPITA WELLS UNIT 939-25		SENE	26	9S	22E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
A	99999	15332	4/13/2006		4/27/06		
Comments: <u>PRRV = MURD</u> — <u>K</u>							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
43-047-37942	CHAPITA WELLS UNIT 837-11X		SWSE	11	9S	22E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
B	99999	14852	2/15/2006		4/27/06		
Comments: <u>PRRV = MURD</u> — <u>K</u>							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Kaylene R. Gardner

Name (Please Print)

Kaylene R. Gardner
Signature

Regulatory Assistant

Title

4/19/2006

Date

RECEIVED

APR 26 2006

(6/2006)

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE- Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator **EOG RESOURCES, INC.**

3a. Address
P.O. BOX 250 Big Piney WY, 83113

3b. Phone No. (include area code)
307-276-3331

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
**SWSE SECTION 11, T9S, R22E
 668 FSL 1827 FEL 40.045017 LAT 109.404219 LON**

5. Lease Serial No.
U-0281

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.
CHAPITA WELLS UNIT

8. Well Name and No.
CHAPITA WELLS UNIT 837-11X

9. API Well No.
43-047-37942

10. Field and Pool, or Exploratory Area
NATURAL BUTTES

11. County or Parish, State
UINTAH, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Well Spud
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

INITIAL PRODUCTION: The referenced well was turned to sales at 12:00 p.m., 5/30/2006 through Questar meter # 6996 on a 12/64" choke. Opening pressure, FTP 1900 psig, CP 2900 psig.

14. I hereby certify that the foregoing is true and correct
 Name (Printed/Typed)

Kaylene R. Gardner

Title **Regulatory Assistant**

Signature



Date **05/31/2006**

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by _____
 Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title _____ Date _____
 Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

RECEIVED

JUN 02 2006

BUREAU OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

FORM APPROVED
OMB NO. 1004-0137
Expires: March 31, 2007

5. Lease Serial No. **U-0281**

6. If Indian, Allottee or Tribe Name

7. Unit or CA Agreement Name and No.
Chapita Wells Unit

8. Lease Name and Well No.
Chapita Wells Unit 837-11X

9. AFI Well No.
43-047-37942

10. Field and Pool, or Exploratory
Natural Buttes/Mesaverde

11. Sec., T., R., M., on Block and Survey or Area **Sec. 11-T9S-R22E**

12. County or Parish **Uintah County** 13. State **UT**

17. Elevations (DF, RKB, RT, GL)*
4795 NAT GL

1a. Type of Well Oil Well Gas Well Dry Other

b. Type of Completion: New Well Work Over Deepen Plug Back Diff. Resrv.,
Other _____

2. Name of Operator **EOG Resources, Inc.**

3. Address **600 17th Street, Suite 1000N, Denver, CO 80202** 3a. Phone No. (include area code)
303-824-5526

14. Date Spudded **02/15/2006** 15. Date T.D. Reached **04/18/2006** 16. Date Completed **05/30/2006**
 D & A Ready to Prod.

18. Total Depth: MD **9500** 19. Plug Back T.D.: MD **9436** 20. Depth Bridge Plug Set: MD
TVD TVD TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
RST/CBL/CCL/VDL/GR

22. Was well cored? No Yes (Submit analysis)
Was DST run? No Yes (Submit report)
Directional Survey? No Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12-1/4"	9-5/8"	J-55	36.0#	0-2415		585 sx			
7-7/8"	4-1/2"	N-80	11.6#	0-9481		1805 sx			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-3/8"	7301							

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Mesaverde	7308	9144	8789-9144		2/spf	
B)			8508-8712		2/spf	
C)			8273-8465		2/spf	
D)			8088-8218		2/spf	

26. Perforation Record

Depth Interval	Amount and Type of Material
8789-9144	49,335 GALS GELLED WATER & 171,166# 20/40 SAND
8508-8712	52,098 GALS GELLED WATER & 192,575# 20/40 SAND
8273-8465	48,707 GALS GELLED WATER & 152,943# 20/40 SAND
8088-8218	49,640 GALS GELLED WATER & 171,191# 20/40 SAND

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
05/30/2006	06/05/2006	24	→	75	503	220			FLOWS FROM WELL
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	PRODUCING GAS WELL
12/64"	SI 1800	2500	→						

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

*(See instructions and spaces for additional data on page 2)

RECEIVED

JUL 26 2006

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

29. Disposition of Gas (Sold, used for fuel, vented, etc.)

SOLD

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
Mesaverde	7308	9144		Wasatch Chapita Wells Buck Canyon North Horn Island Top Price River Middle Price River Lower Price River	4843 5403 6137 6698 6911 7301 8120 8832

32. Additional remarks (include plugging procedure):

SEE ATTACHED SHEET.

33. Indicate which items have been attached by placing a check in the appropriate boxes:

- Electrical/Mechanical Logs (1 full set req'd.)
 Geologic Report
 DST Report
 Directional Survey
 Sundry Notice for plugging and cement verification
 Core Analysis
 Other:

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) Mary A. Maestas

Title Operations Clerk

Signature

Mary A. Maestas

Date 07/19/2006

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Chapita Wells Unit 837-11X - ADDITIONAL REMARKS (CONTINUED):

26. PERFORATION RECORD

7796-8032	2/spf
7554-7716	2/spf
7308-7484	2/spf

27. ACID, FRACTURE TREATMENT, CEMENT SQUEEZE, ETC.

7796-8032	48,847 GALS GELLED WATER & 171,135# 20/40 SAND
7554-7716	52,639 GALS GELLED WATER & 182,298# 20/40 SAND
7308-7484	55,224 GALS GELLED WATER & 195,791# 20/40 SAND

Perforated the Lower Price River from 8789-90', 8815-16', 8824-25', 8836-37', 8879-80', 8931-32', 8942-43', 8960-61', 8987-88', 9005-06', 9017-18', 9038-39', 9085-86' & 9143-44' w/ 2 spf.

Perforated the Middle Price River from 8508-09', 8521-22', 8530-31', 8536-37', 8546-47', 8558-59', 8603-04', 8621-22', 8651-52', 8674-75', 8687-88', 8702-03' & 8710-12' w/ 2 spf.

Perforated the Middle Price River from 8273-74', 8293-94', 8300-01', 8309-10', 8328-29', 8350-51', 8363-64', 8384-85', 8395-96', 8405-06', 8414-15', & 8464-65' w/ 2 spf.

Perforated the Middle Price River from 8088-89', 8125-26', 8137-38', 8145-46', 8170-71', 8182-83', 8193-94', 8205-06' & 8216-18' w/ 2 spf.

Perforated the Upper Price River from 7796-97', 7812-13', 7824-25', 7841-42', 7873-74', 7910-11', 7917-18', 7982-83', 7995-96', 8009-10', 8021-22' & 8031-32' w/ 2 spf.

Perforated the Upper Price River from 7554-55', 7561-62', 7598-99', 7604-05', 7616-17', 7634-35', 7643-44', 7649-50', 7659-60', 7667-68', 7673-74' & 7715-16' w/ 2 spf.

Perforated the Upper Price River from 7308-09', 7316-17', 7323-24', 7352-53', 7359-60', 7366-67', 7396-97', 7407-08', 7414-15', 7421-22', 7446-47', 7456-57', 7470-71' & 7483-84' w/ 2 spf.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OM B No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE- Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator **EOG Resources, Inc.**

3a. Address
600 17th Street, Suite 1000N, Denver, CO 80202

3b. Phone No. (include area code)
303-824-5526

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

**668' FSL & 1827' FEL (SW/SE)
 Sec. 11-T9S-R22E 40.045017 LAT 109.404219 LON**

5. Lease Serial No.

U-0281

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

Chapita Wells Unit

8. Well Name and No.

Chapita Wells Unit 837-11X

9. API Well No.

43-047-37942

10. Field and Pool, or Exploratory Area

Natural Buttes/Mesaverde

11. County or Parish, State

Uintah County, Utah

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Pit reclamation
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

The reserve pit for the referenced well was closed on 6/5/2006 as per the APD procedure.

14. I hereby certify that the foregoing is true and correct
 Name (Printed/Typed)

Mary A. Maestas

Title **Regulatory Assistant**

Signature

Mary A. Maestas

Date

01/09/2007

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

RECEIVED

JAN 10 2007

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE- Other instructions on reverse side.		5. Lease Serial No. U-0281
1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		6. If Indian, Allottee or Tribe Name
2. Name of Operator EOG Resources, Inc.		7. If Unit or C/A/Agreement, Name and/or No. Chapita Wells Unit
3a. Address 600 17th Street, Suite 1000N, Denver, CO 80202	3b. Phone No. (include area code) 303-824-5526	8. Well Name and No. Chapita Wells Unit 837-11X
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 668' FSL & 1827' FEL (SW/SE) Sec. 11-T9S-R22E 40.045017 LAT 109.404219 LON		9. API Well No. 43-047-37942
		10. Field and Pool, or Exploratory Area Natural Buttes/Mesaverde
		11. County or Parish, State Uintah County, Utah


12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION				
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off	
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity	
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Interim reclamation	
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon		
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal		

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

All material, debris, trash, and junk was removed from the location. The reserve pit was reclaimed. Stockpiled topsoil was spread over the pit area and broadcast seeded with the prescribed seed mixture. The seeded area was then walked down with a cat. Interim reclamation was completed on May 1, 2007.

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

14. I hereby certify that the foregoing is true and correct Name (Printed/Typed) Mary A. Maestas		Title Regulatory Assistant
Signature 	Date 05/15/2007	

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

RECEIVED

MAY 17 2007

DIV. OF OIL, GAS & MINING



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155

IN REPLY REFER TO
3180
UT-922

AUG 06 2007

EOG Resources, Inc.
Attn: Debbie Spears
600 Seventeenth Street
Suite 100N
Denver, Colorado 80202

Re: 1st Revision of the
Consolidated Mesaverde Formation PA
"A-B-D-E-F-G-H-J-K-L-N" Chapita Wells Unit
Uintah County, Utah

Gentlemen:

The 1st Revision of the Consolidated Mesaverde Formation PA "A-B-D-E-F-G-H-J-K-L-N, Chapita Wells Unit, CRS No. UTU63013AF, AFS No. 892000905AF, is hereby approved effective as of May 1, 2006, pursuant to Section 11 of the Chapita Wells Unit Agreement, Uintah County, Utah.

The 1st Revision of the Consolidated Mesaverde Formation PA "A-B-D-E-F-G-H-J-K-L-N" results in the addition of 400.00 acres to the participating area for a total of 8,314.69 acres and is based upon the completion of the following wells as capable of producing unitized substances in paying quantities:

To 13650

WELL NO.	API NO.	LOCATION	LEASE NO.
837-11X	43-047-37942	SW $\frac{1}{4}$ SE $\frac{1}{4}$, 11-9S-22E	UTU0281
916-14	43-047-36338	NW $\frac{1}{4}$ SW $\frac{1}{4}$, 14-9S-22E	UTU0282
887-15	43-047-35395	NE $\frac{1}{4}$ SE $\frac{1}{4}$, 15-9S-22E	UTU0283-A
896-25	43-047-35537	SW $\frac{1}{4}$ SW $\frac{1}{4}$, 25-9S-22E	UTU010956
865-33X	43-047-37786	NE $\frac{1}{4}$ NW $\frac{1}{4}$, 33-9S-23E	UTU0336

from 14852

RECEIVED

AUG 10 2007

DIV. OF OIL, GAS & MINING

Copies of the approved request are being distributed to the appropriate federal agencies and one copy is returned herewith. Please advise all interested parties of the approval of the 1 Revision of the Consolidated Mesaverde Formation PA "A-B-D-E-F-G-H-J-K-L-N", Chapita Wells Unit, and the effective date.

Sincerely,

/s/ Greg J. Noble

Greg J. Noble
Chief Branch of Fluid Minerals

Enclosure

bcc: Division of Oil, Gas & Mining
SITLA
Chapita Wells Unit w/enclosure
Field Manager - Vernal w/enclosure
MMS - Data Management Division (Attn: James Sykes)
Fluids - Mickey
Fluids - Judy
Agr. Sec. Chron.
Reading File
Central Files

CSeare:cs: (08/03/2007)1st rev cons chapita abdefghjklN

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: EOG Resources, Inc. Operator Account Number: N 9550
 Address: 600 17th St., Suite 1000N
city Denver
state CO zip 80202 Phone Number: (303) 824-5526

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
43-047-35015	CWU 830-4		SWSW	4	9S	22E	Uintah
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
C	14200	13650	6/20/2004		5/1/2006		
Comments: <u>MVRD</u> <u>12/31/07</u>							

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
43-047-37942	CWU 837-11X		SWSE	11	9S	22E	Uintah
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
C	14852	13650	2/15/2006		5/1/2006		
Comments: <u>MVRD</u> <u>12/31/07</u>							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
43-047-36338	CWU 916-14		NWSW	14	9S	22E	Uintah
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
C	15239	13650	3/10/2006		5/1/2006		
Comments: <u>MVRD</u> <u>12/31/07</u>							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Mary A. Maestas

Name (Please Print)

Mary A. Maestas

Signature

Regulatory Assistant

12/26/2007

Title

Date

RECEIVED

DEC 26 2007

DIV. OF OIL, GAS & MINING