

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE*

FORM APPROVED
OMB NO. 1040-0136
Expires: February 28, 1995

5. LEASE DESIGNATION AND SERIAL NO.
UTU-22158

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
N/A

7. UNIT AGREEMENT NAME
WONSITS VALLEY UNIT

8. FARM OR LEASE NAME, WELL NO.
WV 13AML-8-8-22

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

TYPE OF WORK
DRILL DEEPEN

TYPE OF WELL
 SINGLE MULTIPLE
OIL WELL GAS WELL OTHER ZONE ZONE

2. NAME OF OPERATOR
QEP UINTA BASIN, INC.
Contact: Jan Nelson
E-Mail: jan.nelson@questar.com

9. API NUMBER:
43047-379

3. ADDRESS
11002 E. 17500 S. Vernal, Ut 84078
Telephone number
Phone 435-781-4331 Fax 435-781-4323

10. FIELD AND POOL, OR WILDCAT
WONSITS VALLEY UNIT 710

4. LOCATION OF WELL (Report location clearly and in accordance with and State requirements*)
At Surface 630427X 1285' FSL 1252' FWL, SW 1/4, SEC. 8, T8S, R22E
At proposed production zone 444-6274 40.134757 -109.469089

11. SEC., T, R, M, OR BLK & SURVEY OR AREA
SEC. 8, T8S, R22E Mer SLB

14. DISTANCE IN MILES FROM NEAREST TOWN OR POSTOFFICE*
11 +/- EAST OF OURAY, UTAH

12. COUNTY OR PARISH
Uintah
13. STATE
UT

15. DISTANCE FROM PROPOSED LOCATION TO NEAREST
PROPERTY OR LEASE LINE, FT.
(also to nearest drig, unit line if any)
1252' +/-

16. NO. OF ACRES IN LEASE
1278.24

17. NO. OF ACRES ASSIGNED TO THIS WELL
20

18. DISTANCE FROM PROPOSED location to nearest well, drilling,
completed, applied for, on this lease, ft

19. PROPOSED DEPTH
11330'

20. BLM/BIA Bond No. on file
ESB000024

21. ELEVATIONS (Show whether DF, RT, GR, ect.)
5053.4' GR

22. DATE WORK WILL START
ASAP

23. Estimated duration
20 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- 1. Well plat certified by a registered surveyor.
- 2. A Drilling Plan
- 3. A surface Use Plan (if location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- 5. Operator certification.
- 6. Such other site specific information and/or plans as may be required by the authorized officer.

SIGNED Jan Nelson Name (printed/typed) Jan Nelson DATE 3-10-06

TITLE Regulatory Affairs

(This space for Federal or State office use)

PERMIT NO. 43047-37945 APPROVAL DATE _____

Application approval does not warrant or certify the applicant holds any legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon

CONDITIONS OF APPROVAL IF ANY:

APPROVED BY Bradley G. Hill TITLE BRADLEY G. HILL ENVIRONMENTAL MANAGER

DATE 04-13-06

*See Instructions On Reverse Side

Title 18 U.S.C Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any mater within its jurisdiction


Federal Approval of this
Action is Necessary

MAR 27 2006

T8S, R22E, S.L.B.&M.

QUESTAR EXPLR. & PROD.

Well location, WV #13AML-8-8-22, located as shown in the SW 1/4 of Section 8, T8S, R22E, S.L.B.&M. Uintah County, Utah.

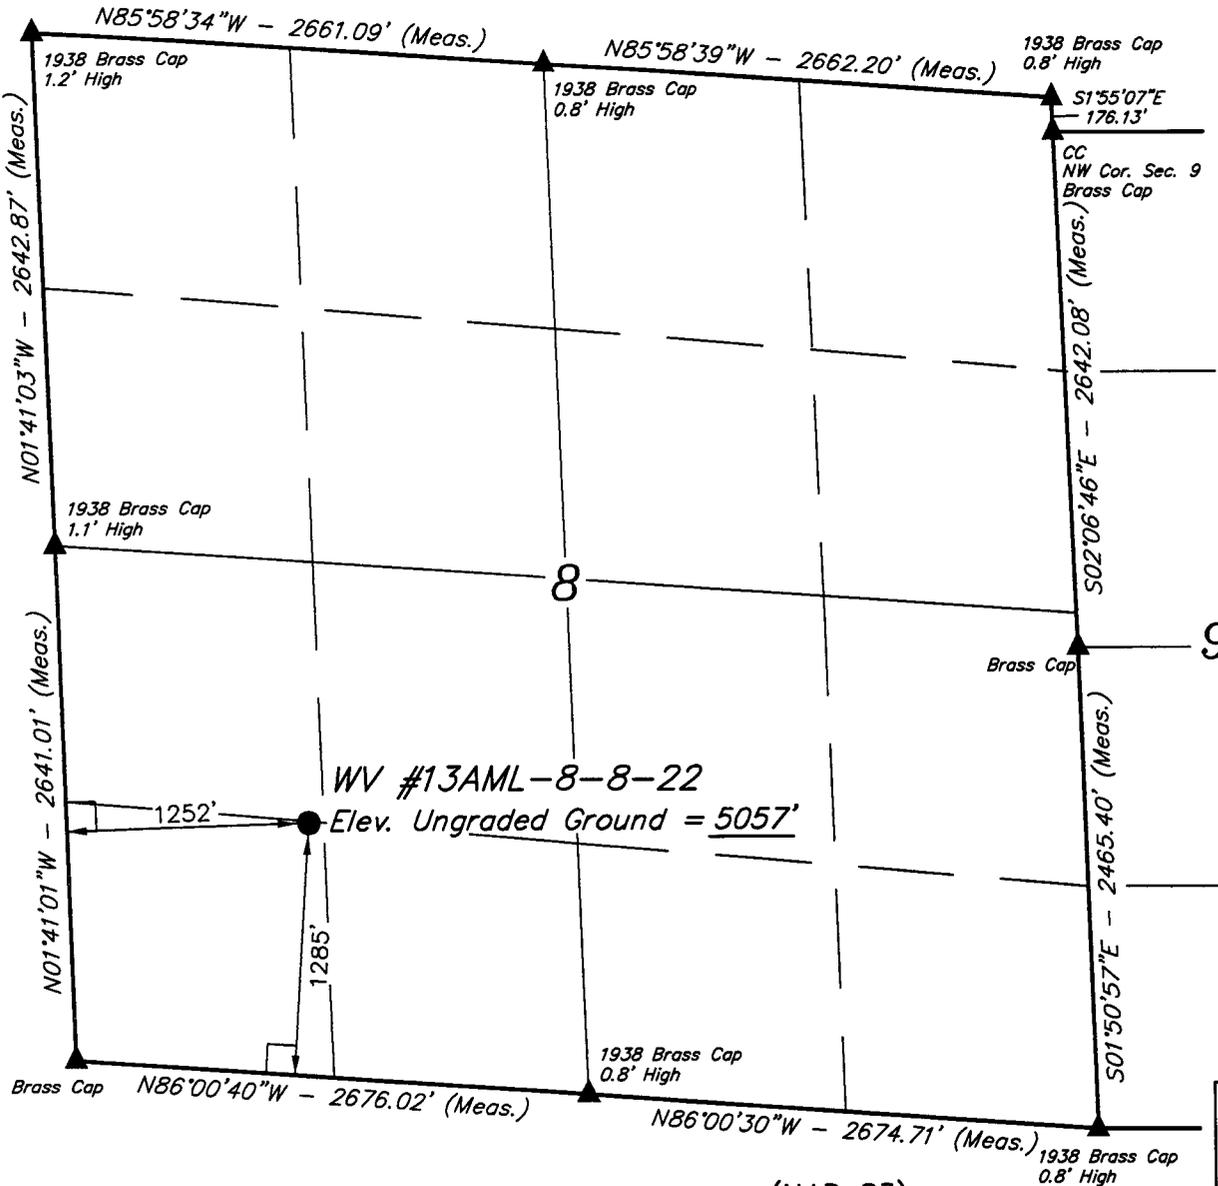


BASIS OF ELEVATION

BENCH MARK 20EAM LOCATED IN THE SE 1/4 OF SECTION 35, T8S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4697 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.



CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

John H. Hay
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 161319
 STATE OF UTAH

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)
 LATITUDE = 40°08'04.99" (40.134719)
 LONGITUDE = 109°28'11.28" (109.469800)
 (NAD 27)
 LATITUDE = 40°08'05.12" (40.134756)
 LONGITUDE = 109°28'08.81" (109.469114)

UINTAH ENGINEERING & LAND SURVEYING

85 SOUTH 200 EAST - VERNAL, UTAH 84078

(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 12-27-05	DATE DRAWN: 01-24-06
PARTY D.A. C.F. L.K.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE QUESTAR EXPLR. & PROD.	

QUESTAR**Questar Exploration and Production Company**

11002 East 17500 South

Vernal, UT 84078

Tel 435 781 4300 • Fax 435 781 4329

April 4, 2006


Division of Oil, Gas & Mining
1594 W. N. Temple STE 1210
Salt Lake City, UT 84114-5801

To Whom It May Concern:

In reference to the State Oil and Gas Conservation rule R649-3-3 QEP Uinta Basin, Inc. WV 13AML-8-8-22 is an exception to this rule due to cause 187-06. This well will be drilled on 20 acre spacing, as the general well location regulations have been vacated for this Wonsits Valley Unit.

There are no additional lease owners within 460' of the proposed location. If you have any question please contact Jan Nelson @ (435) 781-4331.

Thank you,



Jan Nelson
Regulatory Affairs

RECEIVED
APR 04 2006
DIV. OF OIL, GAS & MINING

T8S, R22E, S.L.B.&M.

QUESTAR EXPLR. & PROD.


Well location, WV #13AML-8-8-22, located as shown in the SW 1/4 of Section 8, T8S, R22E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

BENCH MARK 20EAM LOCATED IN THE SE 1/4 OF SECTION 35, T8S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE, QUADRANGLE, UTAH, UTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4697 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

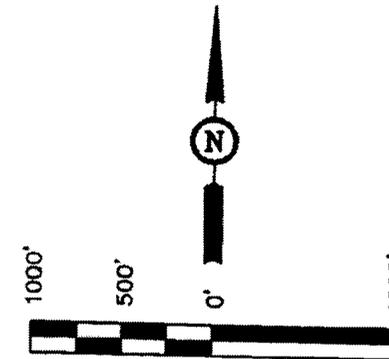


SCALE

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

John H. ...
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 165107
 STATE OF UTAH

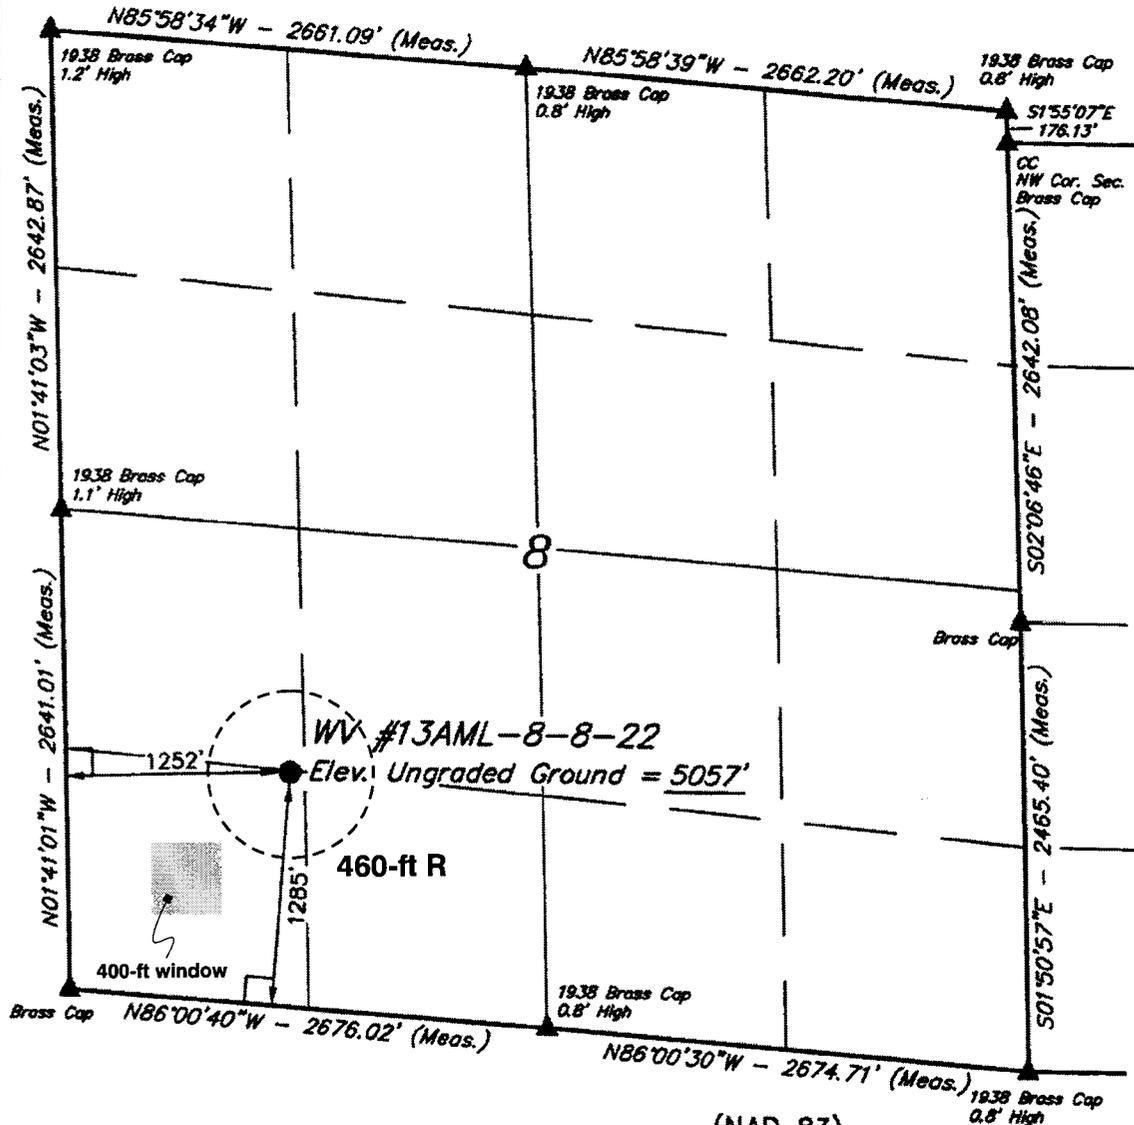

LEGEND:

- └ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)
 LATITUDE = 40°08'04.99" (40.134719)
 LONGITUDE = 109°28'11.28" (109.469800)
 (NAD 27)
 LATITUDE = 40°08'05.12" (40.134756)
 LONGITUDE = 109°28'08.81" (109.469114)

UINTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 12-27-05	DATE DRAWN: 01-24-06
PARTY D.A. C.F. L.K.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE QUESTAR EXPLR. & PROD.	

Additional Operator Remarks

QEP Uinta Basin, Inc. proposes to drill a well to 11330' to test the MesaVerde. If productive, casing will be run and the well completed. If dry, the well will be plugged and abandoned as per BLM and State of Utah requirements"

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and undesignated fields in Townships 07, 08 and 09 South, Ranges 21 and 25 East.

See attached Onshore No. 1

Please be advised that QEP Uinta Basin Inc. agrees to be responsible under the terms and conditions of the lease for the operations conducted upon the lease lands.

Bond coverage for this well is provided by Bond No.ESB000024. The principal is QEP Uinta Basin Inc. via surety as consent as provided for the 43 CFR 3104.2.

DRILLING PROGRAM

ONSHORE OIL & GAS ORDER NO. 1
Approval of Operations on Onshore
Federal Oil and Gas Leases

All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas No. 1, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

1. Formation Tops

The estimated tops of important geologic markers are as follows:

<u>Formation</u>	<u>Depth</u>	<u>Prod. Phase Anticipated</u>
Uinta	Surface	
Green River	2950'	
Wasatch	6330'	Gas
Mesa Verde	9200'	
TD	11330'	

2. Anticipated Depths of Oil Gas Water and Other Mineral Bearing Zones

The estimated depths at which the top and bottom of the anticipated water, oil, gas. Or other mineral bearing formations are expected to be encountered are as follows:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
Oil/Gas	Mesa Verde	11330'

All fresh water and prospectively valuable minerals encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

All water shows and water-bearing sands will be reported to the BLM in Vernal, Utah. Copies of State of Utah form OGC-8-X are acceptable. If no flows are detected, samples will be submitted to the BLM along with any water analyses conducted. Fresh water will be obtained from Wonsits Valley water right #36125 or Red Wash water right # 49-2153 to supply fresh water for drilling purposes.

All water resulting from drilling operations will be disposed of at Red Wash Central Battery Disposal Site; SWSE, Section 27, T7S, R23E or Wonsits Valley Disposal Site; SWNW, Section 12, T8S, R21E.

DRILLING PROGRAM

3. Operator's Specification for Pressure Control Equipment:

- A. 5,000 psi W.P. Double Gate BOP or Single Gate BOP (schematic attached)
- B. Functional test daily
- C. All casing strings shall be pressure tested (0.2 psi/foot or 1500 psi, (or 70% of burst whichever is greater) prior to drilling the plug after cementing; test pressure shall not exceed the internal yield pressure of the casing.
- D. Ram type preventers and associated equipment shall be tested to approved stack working pressure if isolated by test plug or to 50 percent of internal yield pressure of casing whichever is less. BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc..., for a 5M system and individual components shall be operable as designed.

4. Casing Program

	<u>Depth</u>	<u>Hole Size</u>	<u>Csg Size</u>	<u>Type</u>	<u>Weight</u>
Surface	700'	12 1/4"	9-5/8"	J-55	36 lb/ft (new) LT&C
TD	11330'	7 -7/8"	4 -1/2"	P-110	11.60 lb/ft (new)LT&C

5. Auxiliary Equipment

- A. Kelly Cock – yes
- B. Float at the bit – no
- C. Monitoring equipment on the mud system – visually and/or PVT/Flow Show
- D. Full opening safety valve on the rig floor – yes
- E. Rotating Head – yes
- If drilling with air the following will be used:
- F. The blooie line shall be at least 6" in diameter and extend at least 100' from the well bore into the reserve/blooie pit.
- G. Blooie line ignition shall be provided by a continuous pilot (ignited when drilling below 500').
- H. Compressor shall be tied directly to the blooie line through a manifold.

DRILLING PROGRAM

- I. A mister with a continuous stream of water shall be installed near the end of the blowie lines for dust suppression.

Surface hole will be drilled with air, air/mist, foam, or mud depending on hole conditions. Drilling below surface casing will be with water based drilling fluids consisting primarily of fresh water, bentonite, lignite, caustic, lime, soda ash and polymers. No chromates will be used. It is not intended to use oil in the mud, however, in the event it is used, oil concentration will be less than 4% by volume. Maximum anticipated mud weight is 9.5 ppg.

No minimum quantity of weight material will be required to be kept on location.

PVT/Flow Show will be used from base of surface casing to TD.

Gas detector will be used from surface casing depth to TD.

6. Testing, logging and coring program

A. Cores – none anticipated

B. DST – none anticipated

Logging – Mud logging – 4500 to TD
GR-SP-Induction
Neutron Density
MRI

C. Formation and Completion Interval: Mesa Verde interval, final determination of completion will be made by analysis of logs.
Stimulation – Stimulation will be designed for the particular area of interest as encountered.

DRILLING PROGRAM

7. Cementing Program

<u>Casing</u>	<u>Volume</u>	<u>Type & Additives</u>
Surface	399sx	Class "G" single slurry mixed to 15.6 ppg, yield = 1.19 cf/sx. Cement to surface with 160 cf (1541sx) calculated. Tail plug used. Allowed to set under pressure
Production	Lead-687sx* Tail-1666sx*	Lead/Tail oilfield type cement circulated in place . Tail slurry: Class "G" + gilsonite and additives as required, mixed to 14.8 ppg, yield = 1.34 cf/sx. Tail to 5800' ($\pm 500'$ above production zone). Cement Characteristics: Lead slurry: Class "G" + extender and additives as required, mixed to 11.0 ppg, yield = 3.82 cf/sx. Lead to surface. Tail plug used. Allowed to set under pressure.

*Final cement volumes to be calculated from caliper log with an attempt to be made to circulate cement to the surface. A bond log will be run across the zone of interest and across zones as required by the authorized officer to insure protection of natural resources.

8. Anticipated Abnormal Pressures and Temperatures, Other Potential Hazards

No abnormal temperatures or pressures are anticipated. No H2S has been encountered in or known to exist from previous wells drilled to similar depths in the general area. Maximum anticipated bottom hole pressure equals approximately 4914.0 psi. Maximum anticipated bottom hole temperature is 140° F.

5000 PSIG DIAGRAM


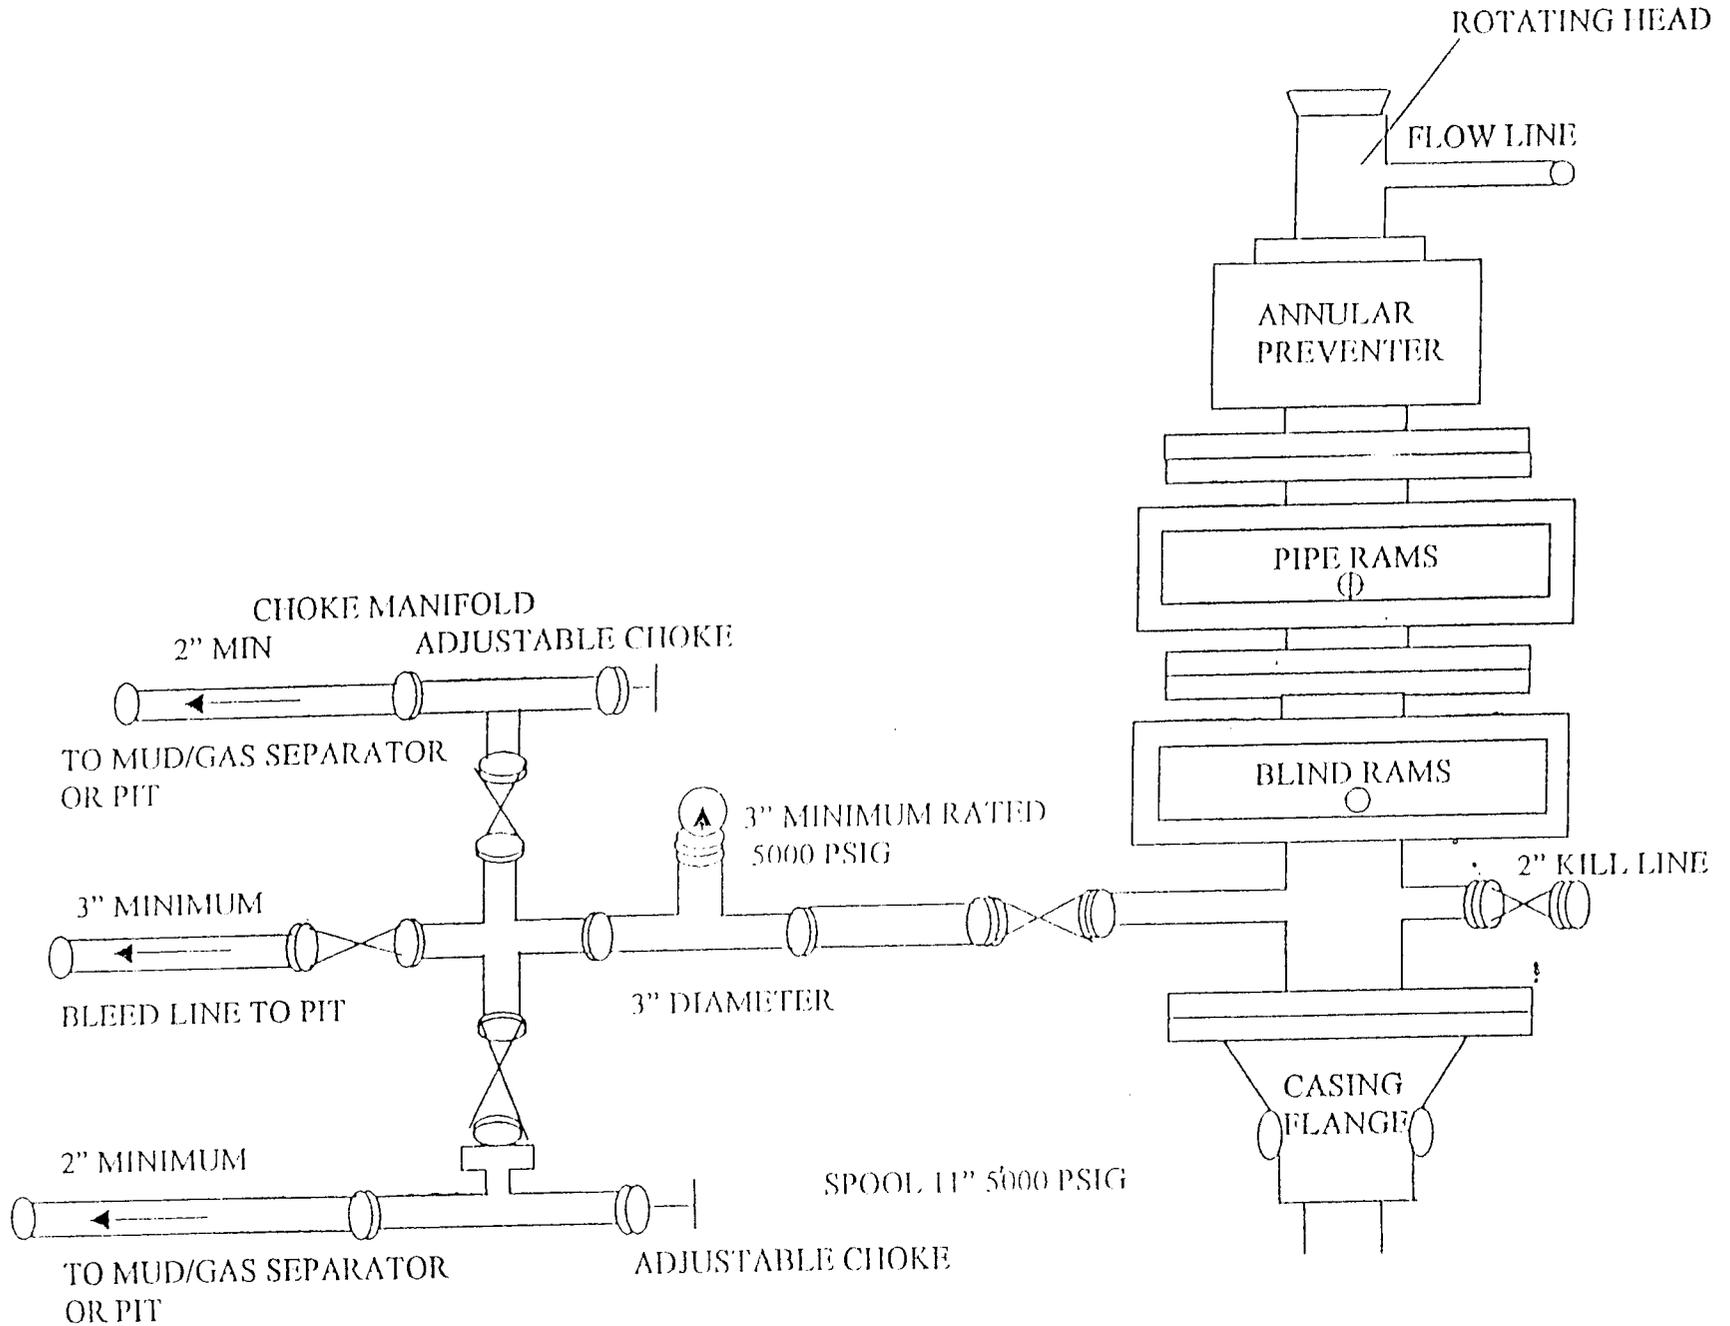


EXHIBIT B CONTINUED

Federal Register / Vol. 53, No. 221 / Friday, November 18, 1988 / Rules and Regulations

46813

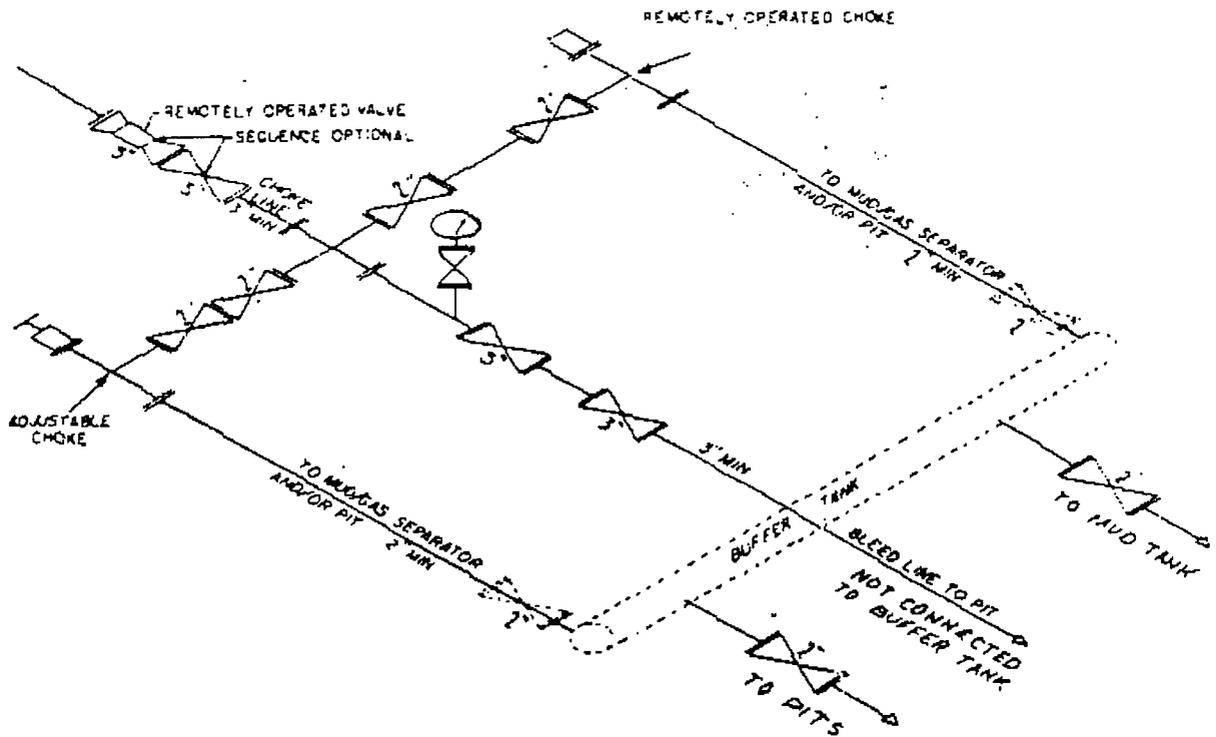

② 5M CHOKE MANIFOLD EQUIPMENT — CONFIGURATION OF CHOKES MAY VARY

[FR Doc. 88-28738 Filed 11-17-88; 8:45 am]
 BILLING CODE 4310-04-C

QEP UINTA BASIN, INC.
WV 13AML-8-8-22
1285' FSL 1252' FWL
SW 1/4, SECTION 8, T8S, R22E
UINTAH COUNTY, UTAH
LEASE # UTU-22158

ONSHORE ORDER NO. 1

MULTI – POINT SURFACE USE & OPERATIONS PLAN

An onsite inspection was conducted for the WV 13AML-8-8-22 on February 7, 2006 . Weather conditions were cold and clear at the time of the onsite. In attendance at the inspection were the following individuals:

Paul Buhler	Bureau of Land Management
Amy Torres	Bureau of Land Management
Nate West	Bureau of Land Management
Jan Nelson	QEP Uinta Basin Inc.

1. Existing Roads:

The proposed well site is approximately 11 miles east of Ouray, Utah.

Refer to Topo Maps A and B for location of access roads within a 2 – mile radius.

There will be no improvements made to existing roads.

2. Planned Access Roads:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

Refer to Topo Map B for the location of the proposed access road.

3. Location of Existing Wells Within a 1 – Mile Radius:

Please refer to Topo Map C.

4. Location of Existing & Proposed Facilities:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

Refer to Topo Map D for the location of the proposed pipeline.

QEP requests a surface pipeline based on the following justification included in the attached "Request for Exception".

5. Location and Type of Water Supply:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

6. Source of Construction Materials:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

7. Methods of Handling Waste Materials:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

8. Ancillary Facilities:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

9. Well Site Layout: (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

A pit liner is required. A felt pit liner will be required if bedrock is encountered.

10. Plans for Reclamation of the Surface:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

Interim Reclamation

Please see attached Interim Reclamation plan.

Once the well is put onto production, QEP will reclaim as much of the well pad as possible that will allow for operations to continue in a safe and reasonable manner. Reseeding will be done in the spring or fall of every year to allow winter precipitation to aid in the success of reclamation.

Seed Mix:

Interim Reclamation:

6 lbs Hycrest Crested Wheatgrass

6 lbs Needle & Thread Grass

Final Reclamation:

Seed Mix # 2 3 lb. Western Wheat Grass, 3 lbs. Needle & Thread Grass, 2 lbs. Fourwing Saltbush
1 lb. Globe Mellow & 4 lbs. Hycrest Crested Wheat.

11. Surface Ownership:

Bureau of Land Management
170 South 500 East
Vernal, Utah 84078
(435) 781-4400

12. Other Information

A Class III archaeological survey was conducted by Montgomery Archaeology Consultants. A copy of this report was submitted directly to the appropriate agencies by Montgomery Archaeology Consultants. Cultural resource clearance was recommended for this location.

A class III paleontological survey was conducted by Intermountain Paleo Consulting. A copy of this report was submitted directly to the appropriate agencies by Stephen D. Sandau. However, if vertebrate fossil(s) are found during construction a paleontologist should be immediately notified. QEP will provide paleo monitor if needed.

QEP Uinta Basin, Inc.
Request for Exception to Buried Pipeline
for
WV 13AML-8-8-22

QEP respectfully requests an exception to burying this pipeline. We understand the standard Condition of Approval (COA) that may be included in the approved Application for Permit to Drill (APD) is: *“As a Best Management Practice (BMP), the pipeline would be buried within the identified construction width of an access corridor that contains the access road and pipelines. The construction width for the access corridor would increase from 30 feet, by an additional 20 feet, to a total of 50 feet. Exceptions to this BMP may be granted where laterally extensive, hard indurated bedrock, such as sandstone, is at or within 2 feet of the surface; and, soil types with a poor history of successful rehabilitation.”* QEP will install the pipeline within the access corridor and will avoid cross-country installation when possible. Our reason for requesting a surface line is based on the following justification:

Class IV VRM

- ◆ This area’s designated Visual Resource Management is classified as Class IV. The Class IV objective is to provide for management activities that require major modification to the existing character of the landscape. The level of change to the landscape can be high. The management activities may dominate the view and may be the major focus of the viewer attention. However, every attempt should be made to minimize the impact of these activities through careful location, minimal disturbance, and repetition of the basic visual elements of form, line, color, and texture.
- ◆ QEP feels that surface pipe will comply with this classification more so than buried pipe due to the amount of surface disturbance that will be required to bury it. We believe surface installation within the access corridor will minimize the disturbance so that the pipeline does not dominate the view.

Environmental and Safety Concerns

- ◆ Buried pipe will greatly increase surface disturbance and habitat fragmentation. The soil in this area has a poor history of successful rehabilitation. Buried pipe will have an increased corrosion rate and would need to be dug up for repairs or replacement; the constant surface disturbance will not allow time for successful reclamation.
- ◆ Increasing surface disturbance will greatly increase noxious and invasive weed infestation.

- ◆ With the increased corrosion rate, buried pipe may have undetectable leaks that could go unnoticed for months. Small leaks may turn into large plumes of underground hazards because they are not easily monitored and not seen right away. An undetected leak also increases the potential for explosive incidents. Once detected, the surface will need to be disturbed, once again, to dig up the line and replace or repair it.
- ◆ Accidents associated with pipe breaks during construction activities could increase substantially as the number of buried lines increases.
- ◆ The additional surface disturbance will increase the risk of disturbing paleontological sites.

Operational and Mechanical Concerns for Gas Lines

- ◆ Cathodic protection will be required for buried pipe. Cathodic protection requires anode beds that must be maintained. This will add substantial costs in labor and material. Additional power lines will need to be installed to the anode beds. The additional costs for equipment and labor will be approximately \$50,000.00 per section.
- ◆ Pipeline markers need to be used with buried pipe. This will add costs in labor and material.
- ◆ Every tie in requires a valve. The average distance between valves is approximately ¼ mile. Valves will have to be placed in “freeze boxes” or “valve boxes”. Valve boxes will be considered confined space which increases the manpower needed to repair or replace valves. Every valve box will also require bright yellow guard rails.
- ◆ Additional equipment required for buried pipe can include blades/dozers, trenchers (cutting or blasting in hard rock), side booms, etc. which increases installation costs.
- ◆ Buried pipe must have fusion bonded epoxy (FBE) coating. FBE pipe will cost an additional \$2.00 per foot compared to bare pipe.
- ◆ This pipeline has the potential for being upgraded/upsized to a larger pipe diameter depending on production volumes. If upsizing is required, the pipe will need to be dug up which will cause additional surface disturbance and will not allow adequate time for successful reclamation.
- ◆ Surface lines are sometimes relocated to accommodate new locations; this is done in an effort to minimize the amount of pipe needed and the amount of surface disturbed. If this pipe is buried, this will no longer be an option.

Lessee's or Operator's Representative:

Jan Nelson
Red Wash Rep.
QEP Uinta Basin, Inc.
11002 East 17500 South
Vernal, Utah 84078
(435) 781-4331


Certification:

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil & Gas Orders, the approved plan of operations, and any applicable Notice to Lessees.

QEP Uinta Basin Inc. will be fully responsible for the actions of their subcontractors.

A complete copy of the approved Application for Permit to Drill will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by QEP Uinta Basin, Inc. it's contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.



Jan Nelson
Red Wash Representative

10-Mar-06

Date

QUESTAR EXPLR. & PROD.

WV #13AML-8-8-22

LOCATED IN UINTAH COUNTY, UTAH
SECTION 8, T8S, R22E, S.L.B.&M.

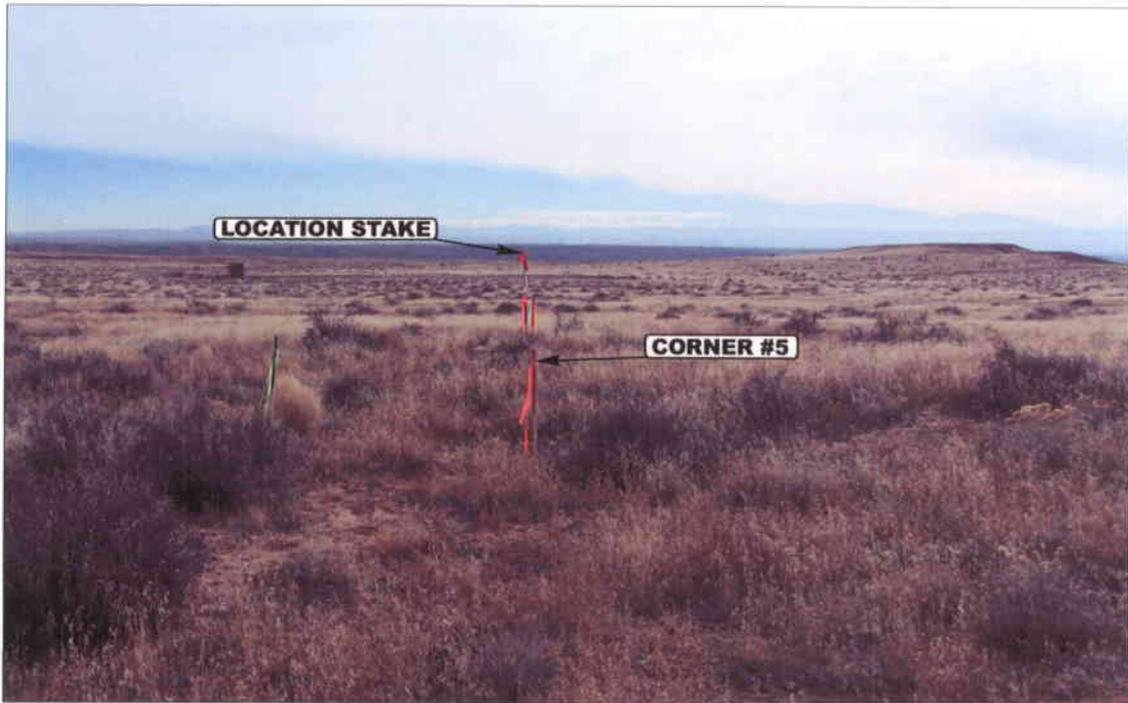


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: SOUTHEASTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: SOUTHERLY



- Since 1964 -

U **E** **L** **S** Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

01 09 06
MONTH DAY YEAR

PHOTO

TAKEN BY: D.A.

DRAWN BY: C.P.


REVISED: 00-00-00

QUESTAR EXPLR. & PROD.

FIGURE #1

LOCATION LAYOUT FOR

WV #13AML-8-8-22
SECTION 8, T8S, R22E, S.L.B.&M.
1285' FSL 1252' FWL

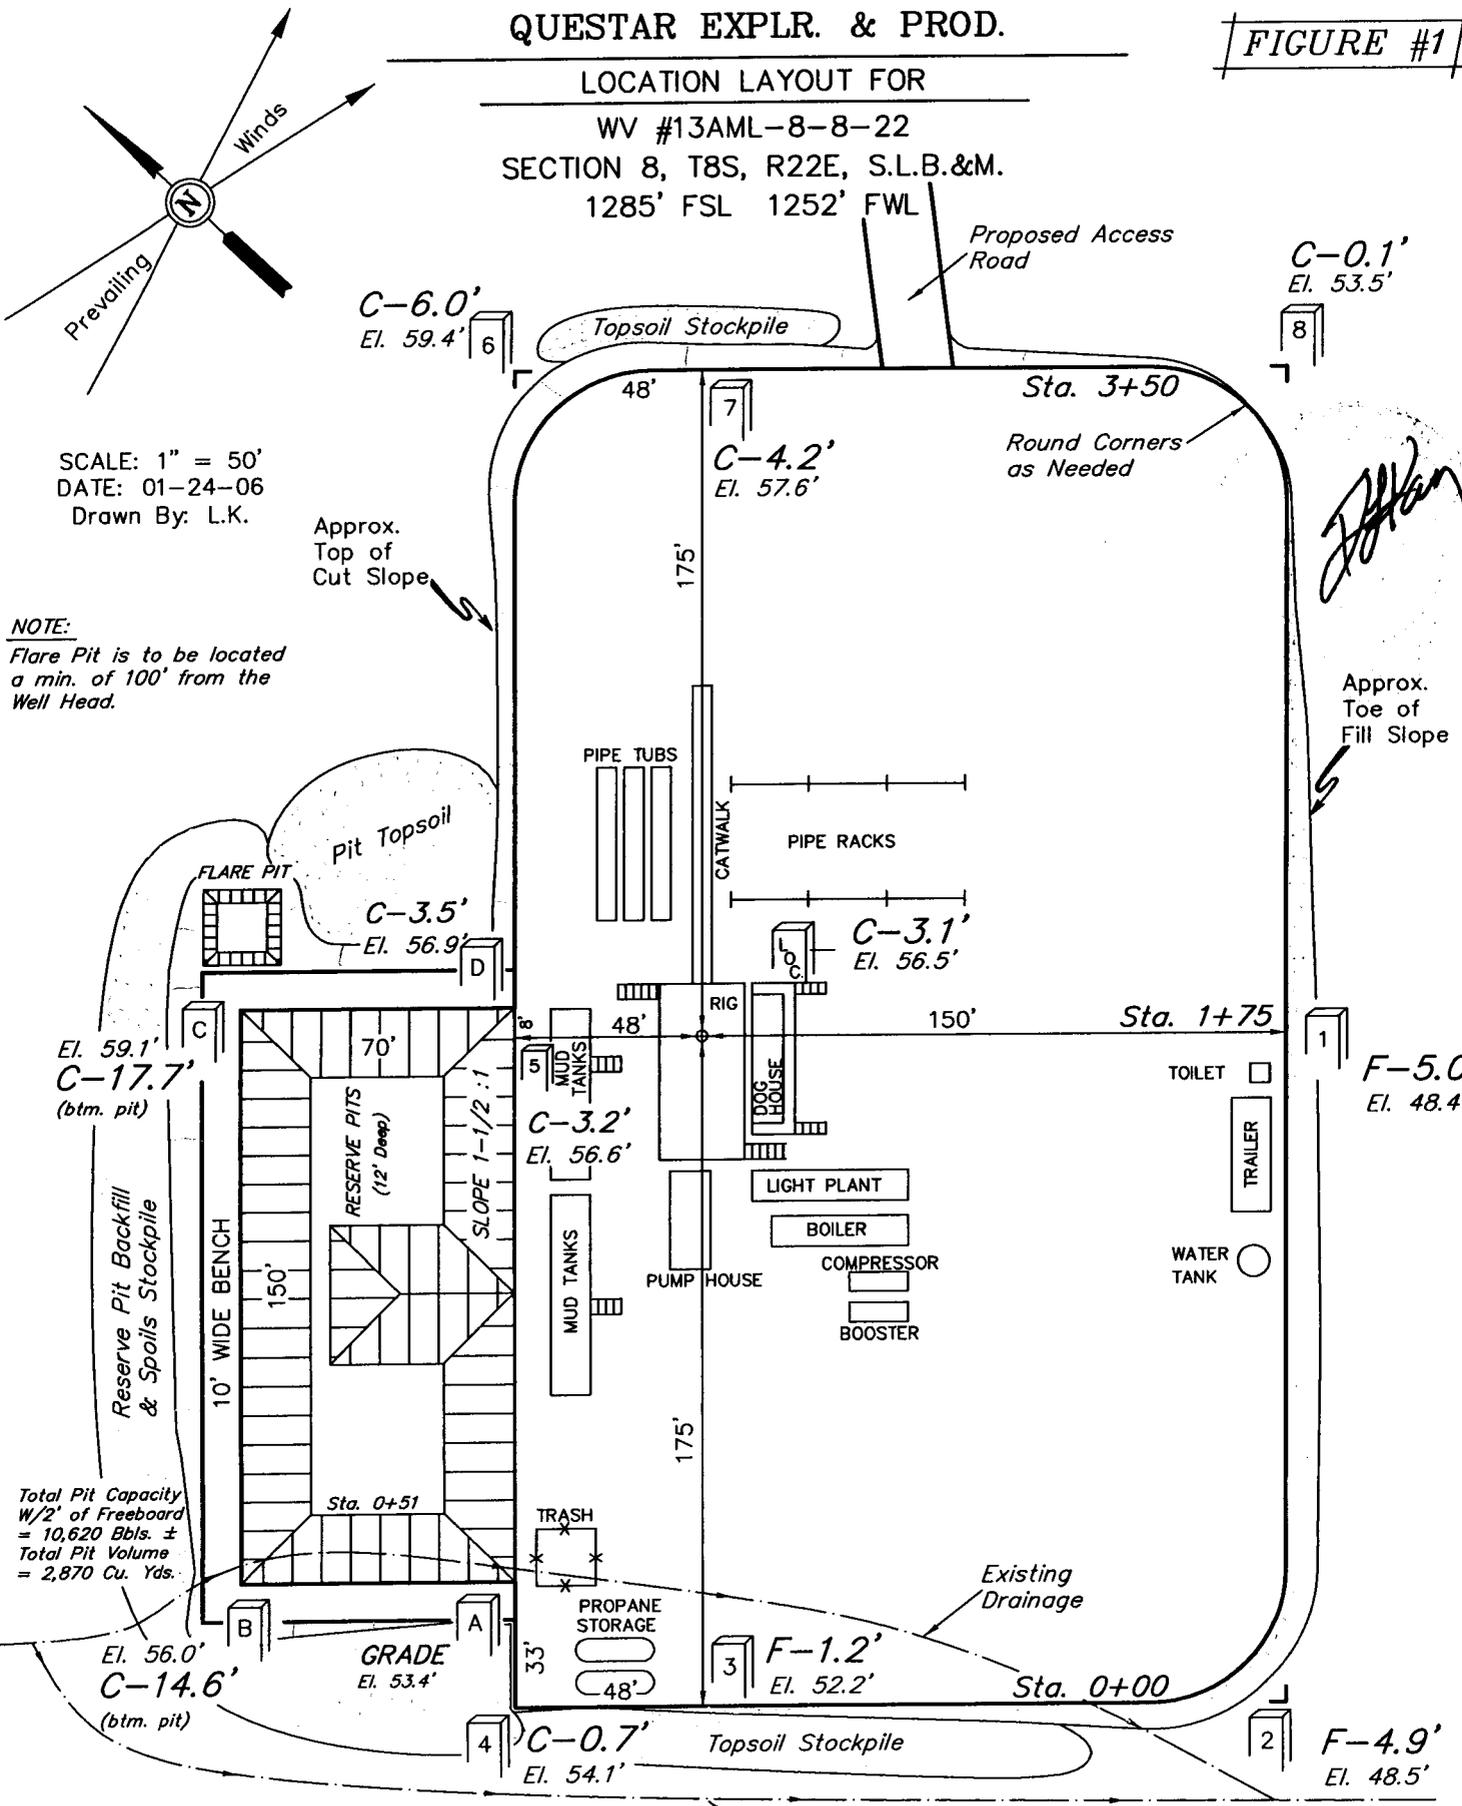

SCALE: 1" = 50'
DATE: 01-24-06
Drawn By: L.K.

NOTE:
Flare Pit is to be located
a min. of 100' from the
Well Head.

Total Pit Capacity
W/2' of Freeboard
= 10,620 Bbls. ±
Total Pit Volume
= 2,870 Cu. Yds.

NOTES:
Elev. Ungraded Ground At Loc. Stake = 5056.5'
FINISHED GRADE ELEV. AT LOC. STAKE = 5053.4'

CONSTRUCT
DIVERSION
DITCH

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

QUESTAR EXPLR. & PROD.

FIGURE #2

TYPICAL CROSS SECTIONS FOR


WV #13AML-8-8-22

SECTION 8, T8S, R22E, S.L.B.&M.

1285' FSL 1252' FWL

1" = 20'
X-Section
Scale
1" = 50'

DATE: 01-24-06
Drawn By: L.K.

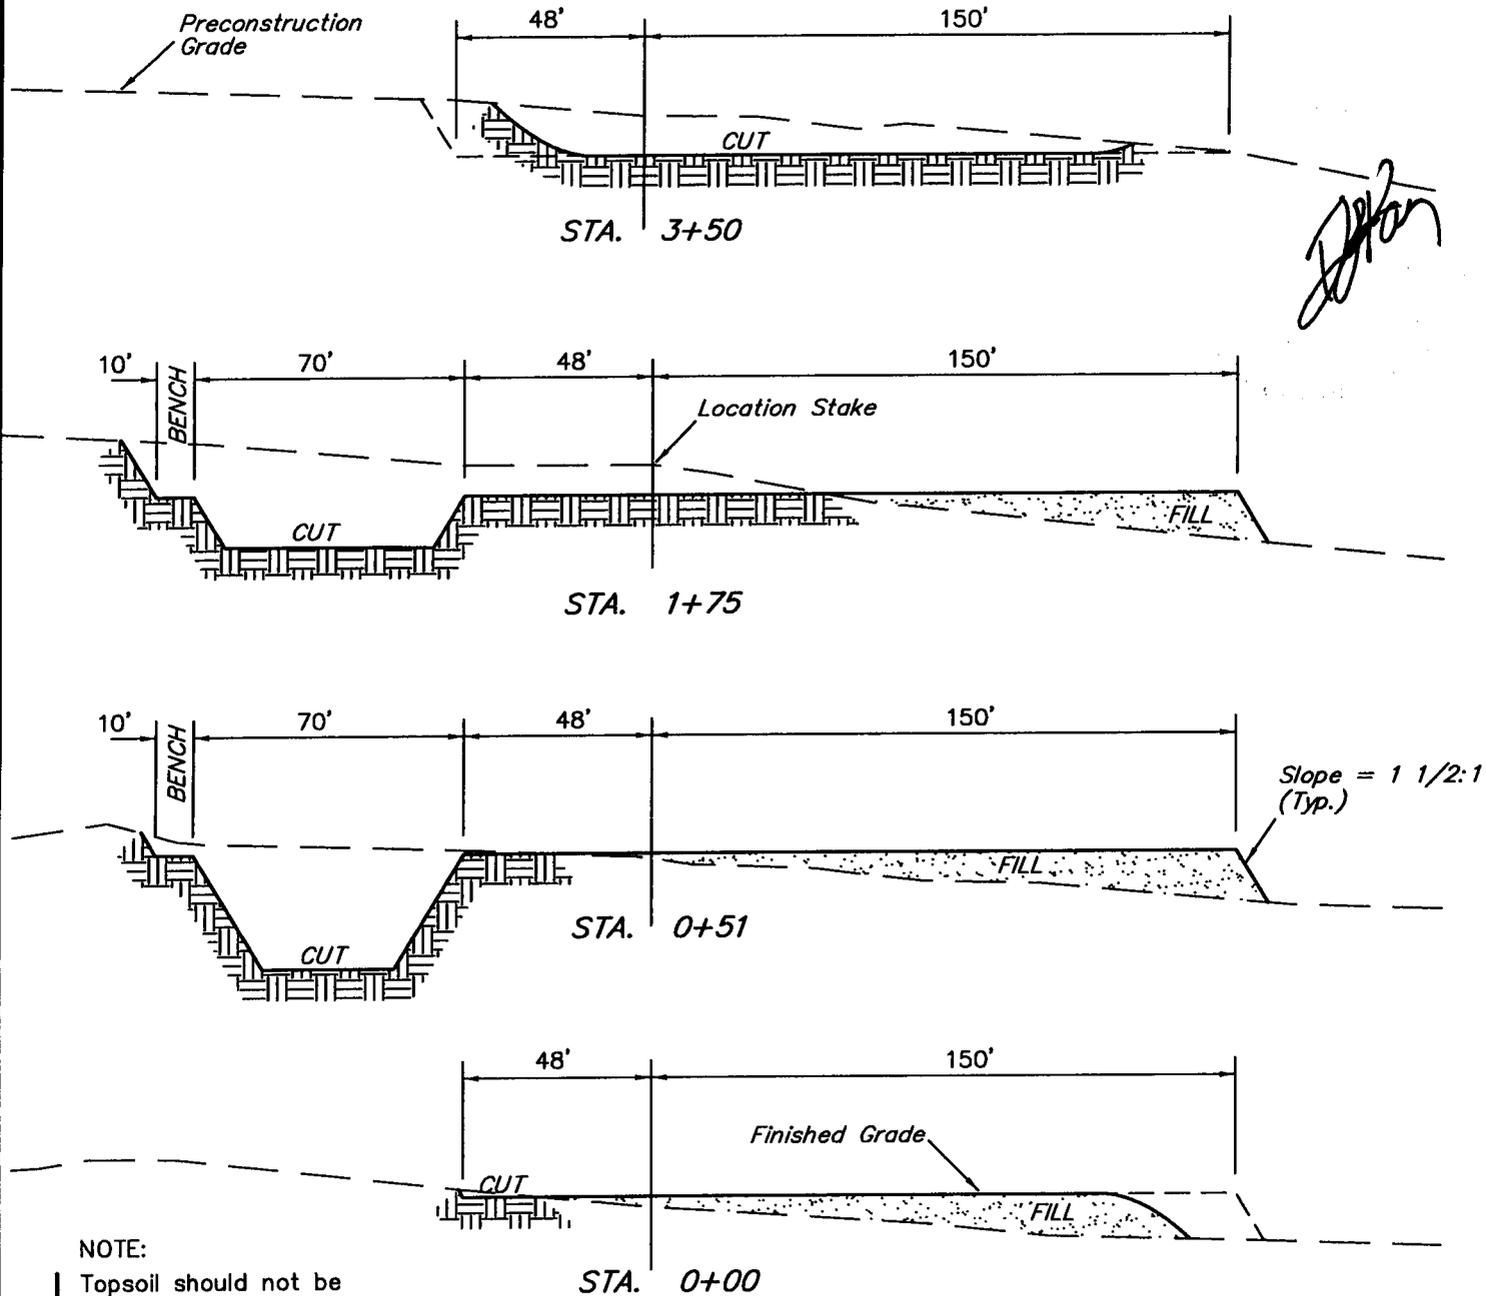

[Handwritten signature]

NOTE:
Topsoil should not be Stripped Below Finished Grade on Substructure Area.

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,690 Cu. Yds.
Remaining Location	= 6,200 Cu. Yds.
TOTAL CUT	= 7,890 CU.YDS.
FILL	= 4,760 CU.YDS.

* NOTE:
FILL QUANTITY INCLUDES 5% FOR COMPACTION

Excess Material	= 3,130 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,130 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.

QUESTAR EXPLR. & PROD.

FIGURE #3

INTERIM RECLAMATION PLAN FOR


WV #13AML-8-8-22

SECTION 8, T8S, R22E, S.L.B.&M.


1285' FSL 1252' FWL



SCALE: 1" = 50'
DATE: 01-24-06
Drawn By: L.K.

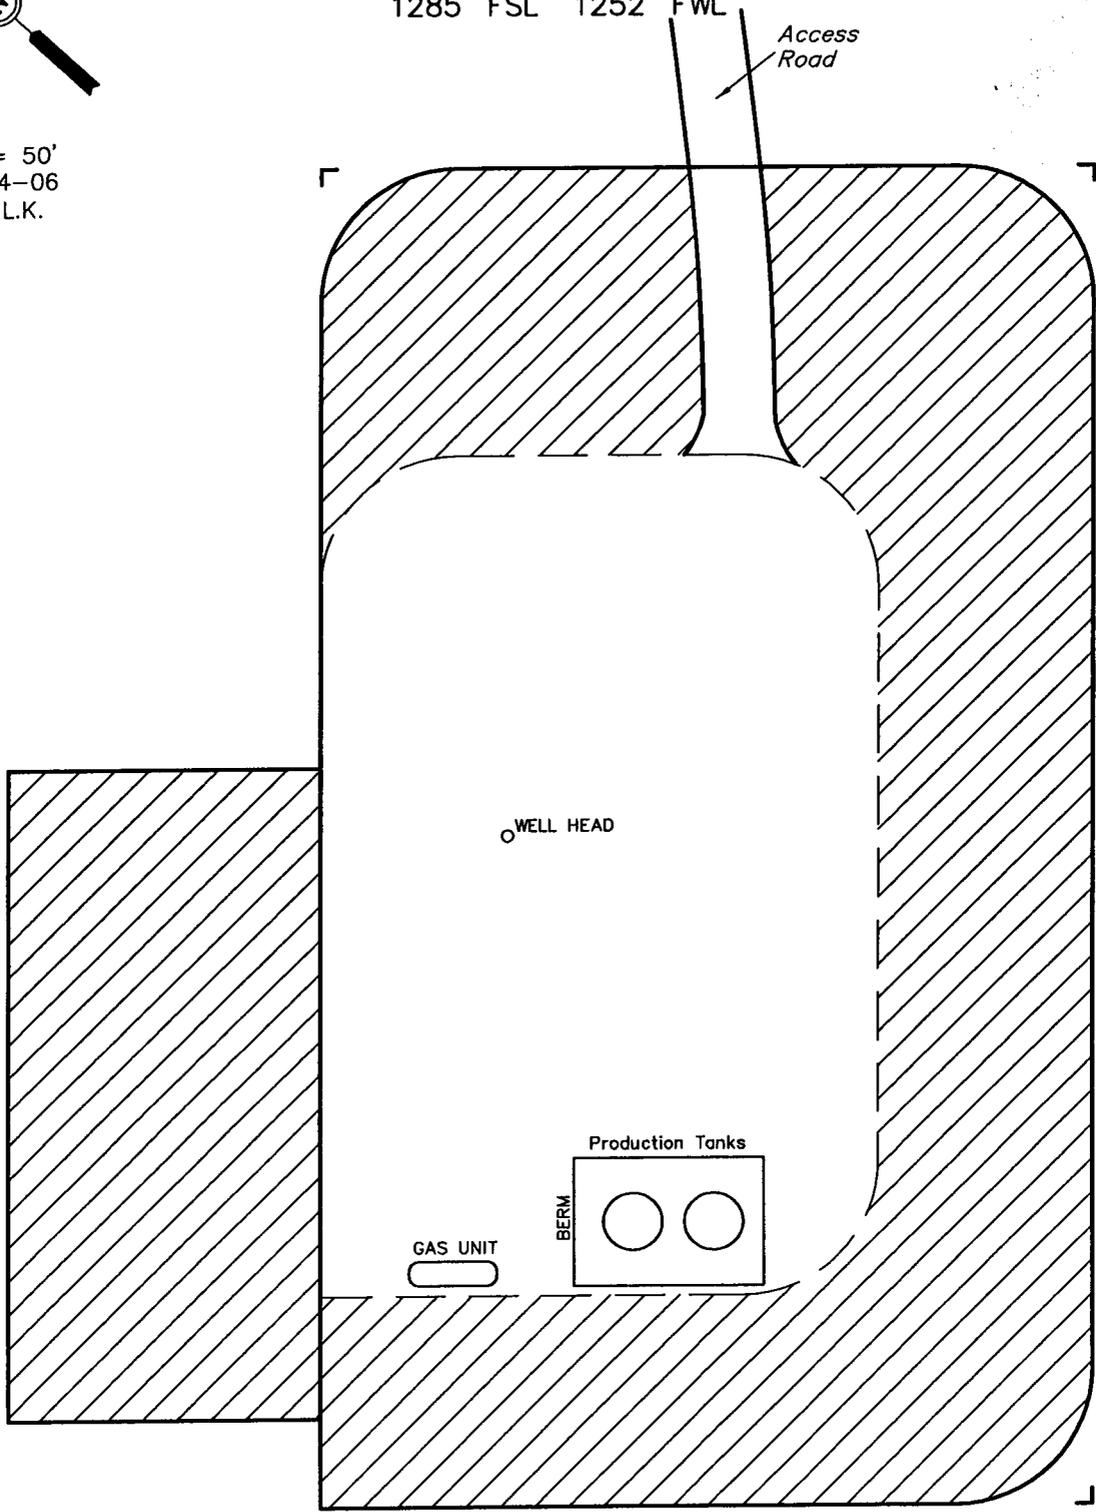

 INTERIM RECLAMATION

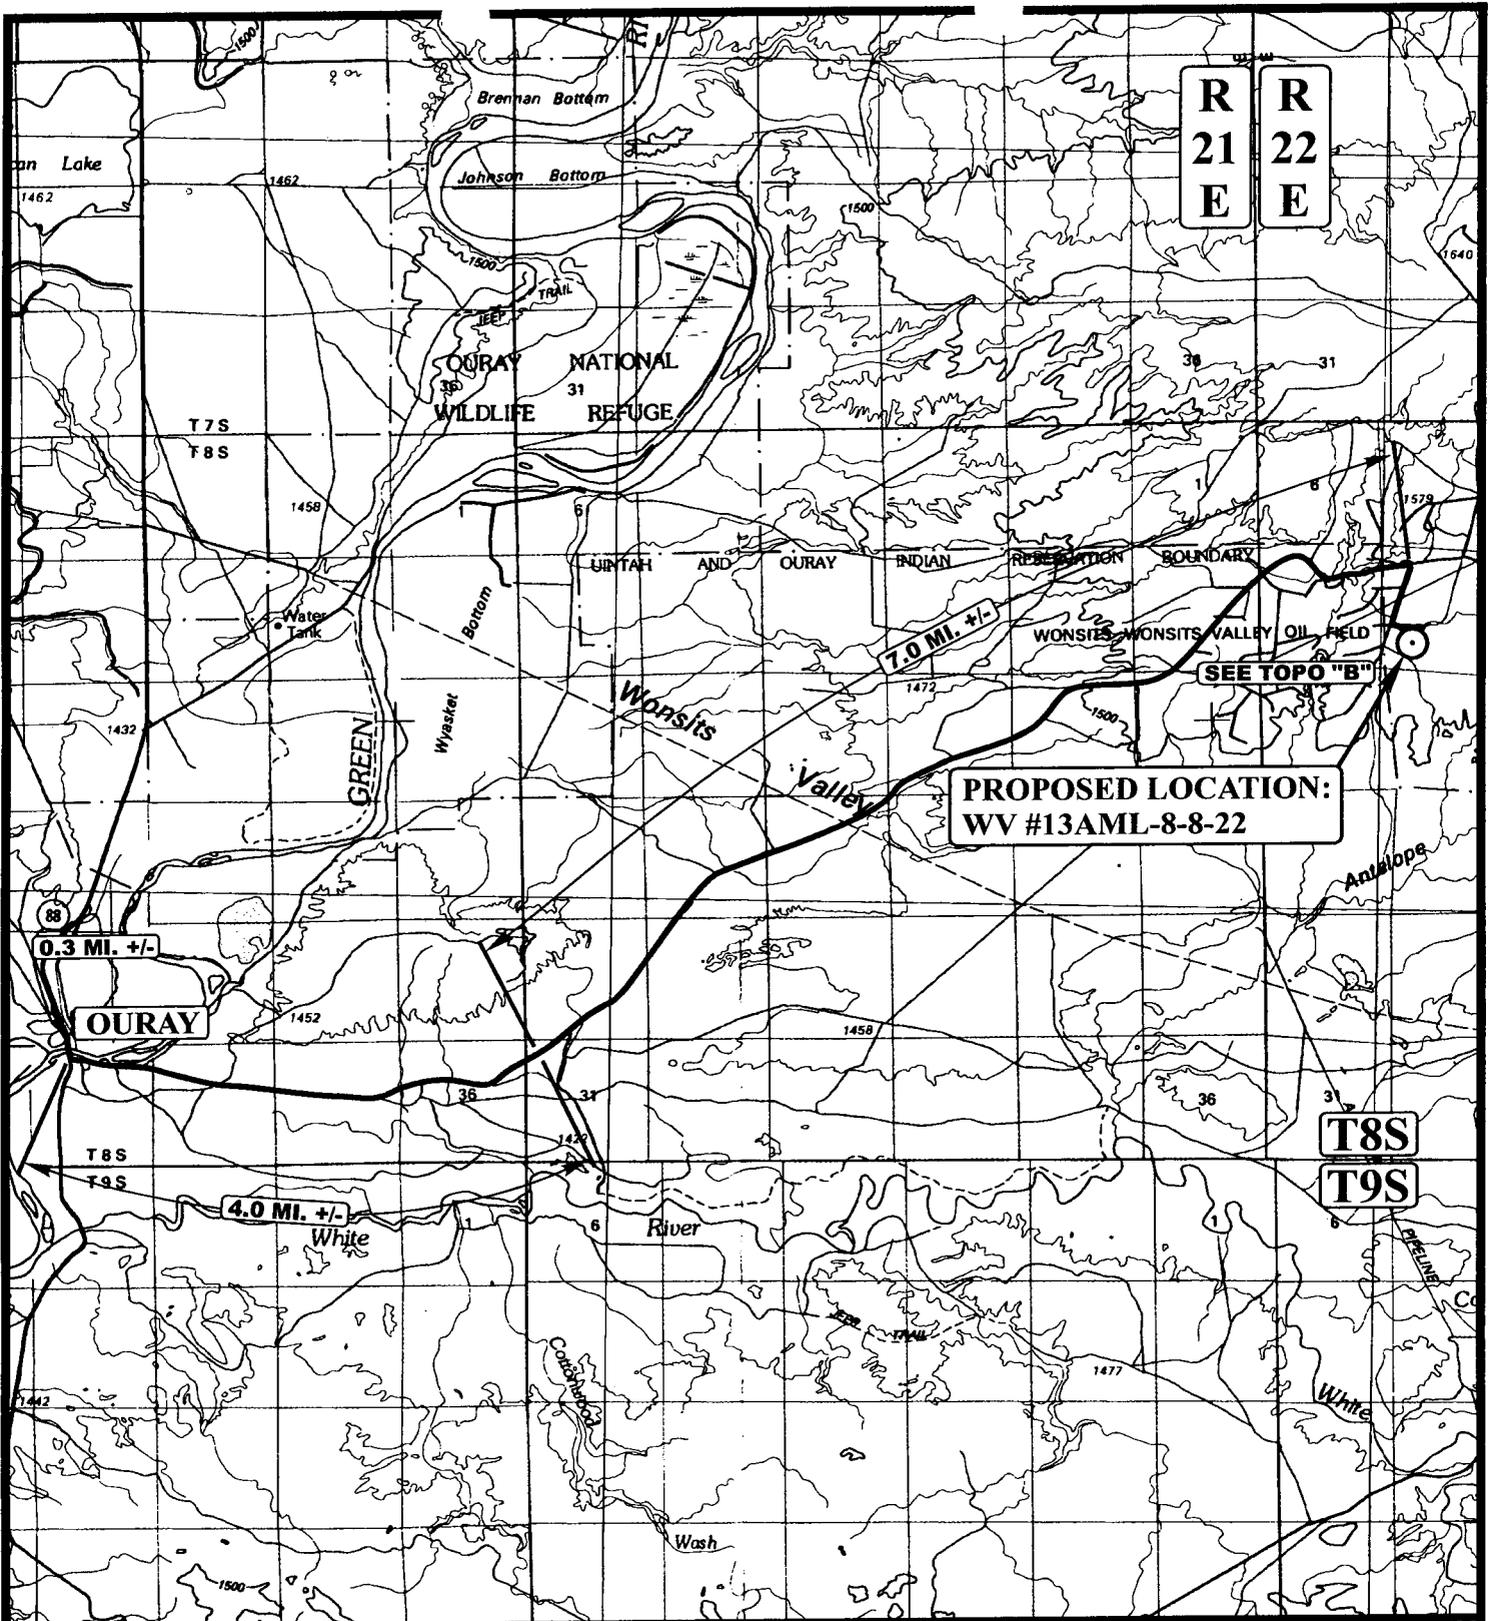

R
21
E

R
22
E

**PROPOSED LOCATION:
WV #13AML-8-8-22**

LEGEND:

⊙ PROPOSED LOCATION



QUESTAR EXPLR. & PROD.


WV #13AML-8-8-22
SECTION 8, T8S, R22E, S.L.B.&M.
1285' FSL 1252' FWL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC 01 09 06
MAP MONTH DAY YEAR
SCALE: 1:100,000 DRAWN BY: C.P. REVISED: 00-00-00



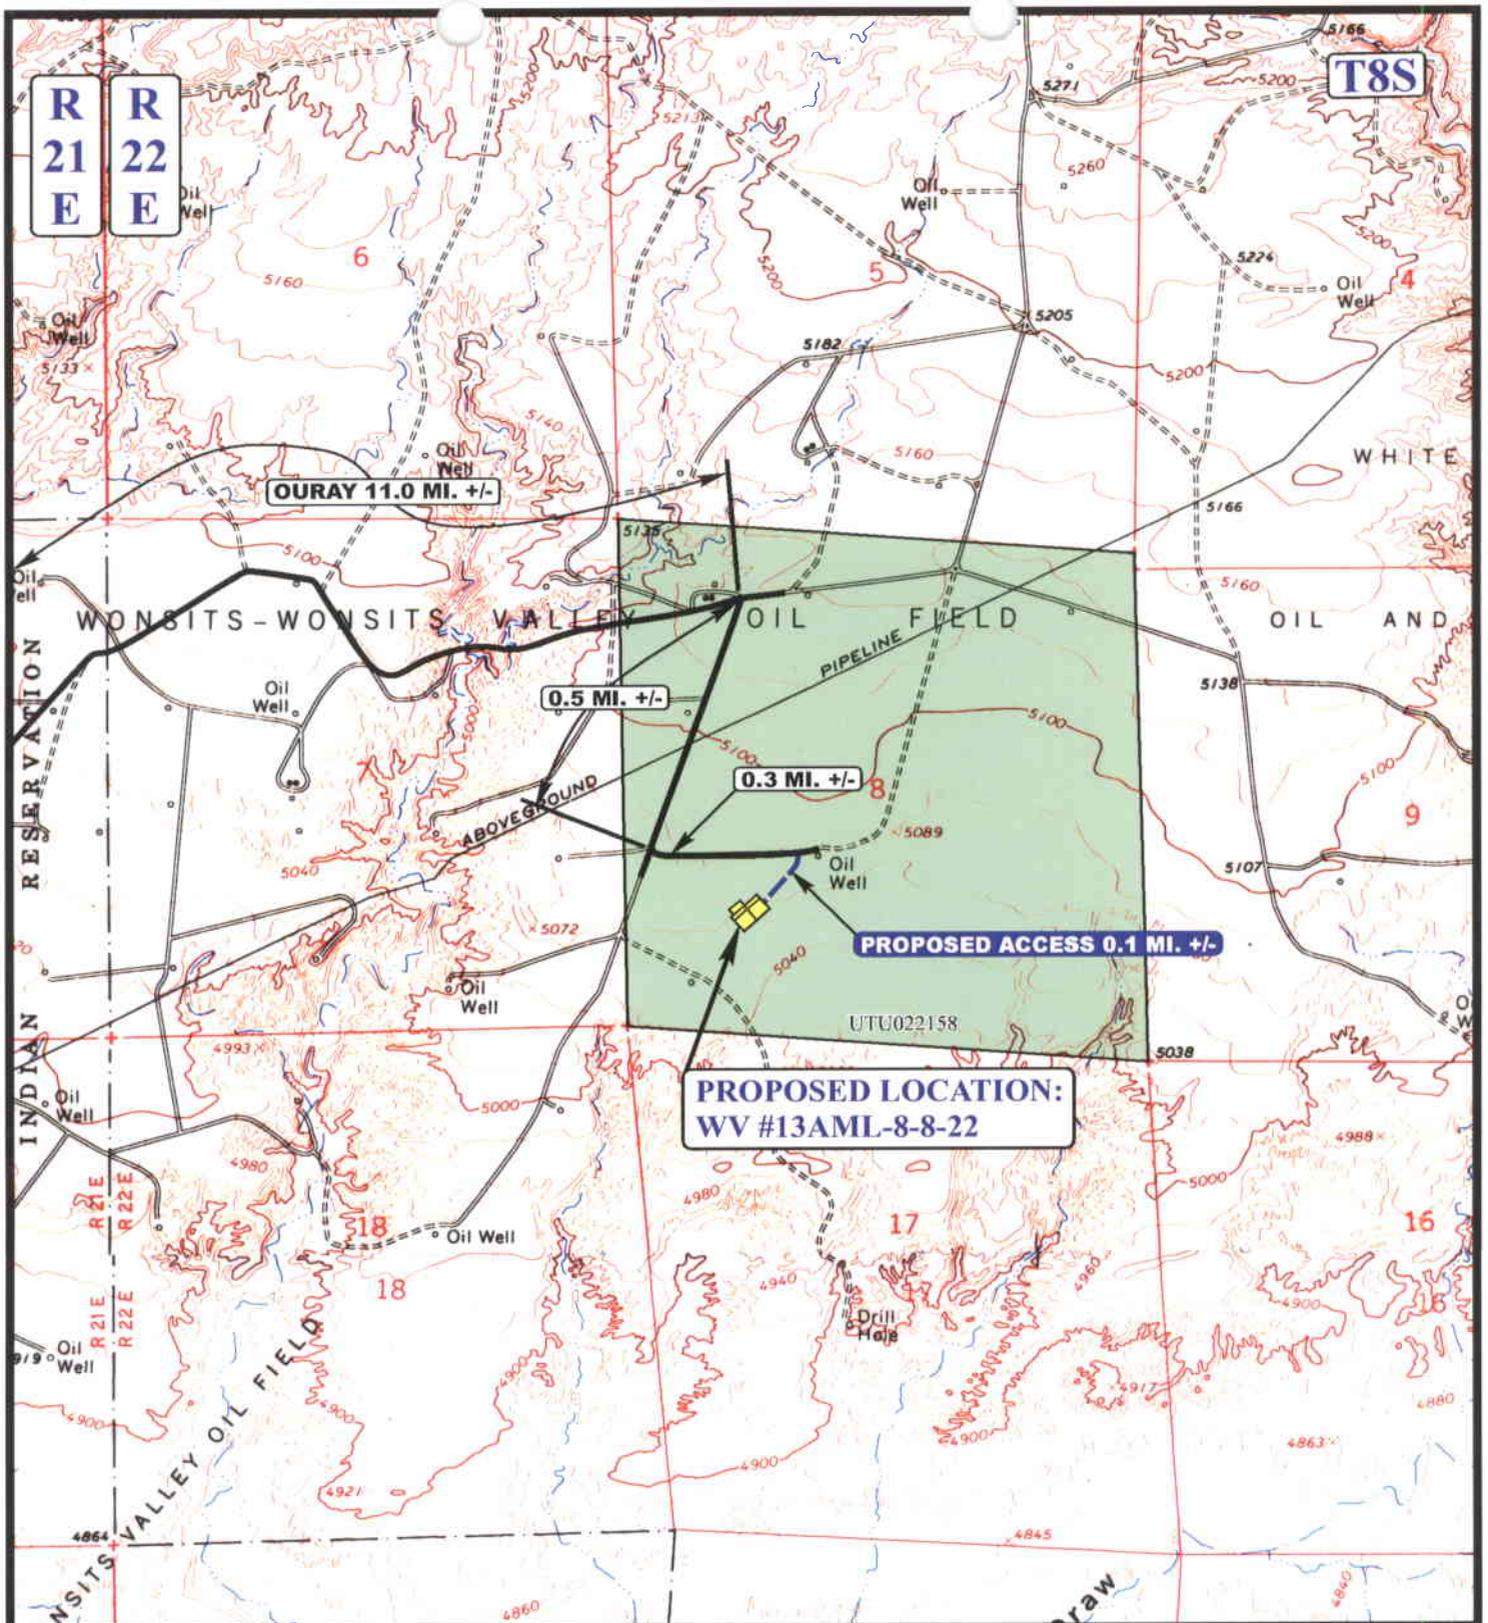

LEGEND:

- EXISTING ROAD
- - - - - PROPOSED ACCESS ROAD



QUESTAR EXPLR. & PROD.

WV #13AML-8-8-22
 SECTION 8, T8S, R22E, S.L.B.&M.
 1285' FSL 1252' FWL




Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP

01	09	06
MONTH	DAY	YEAR

SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00



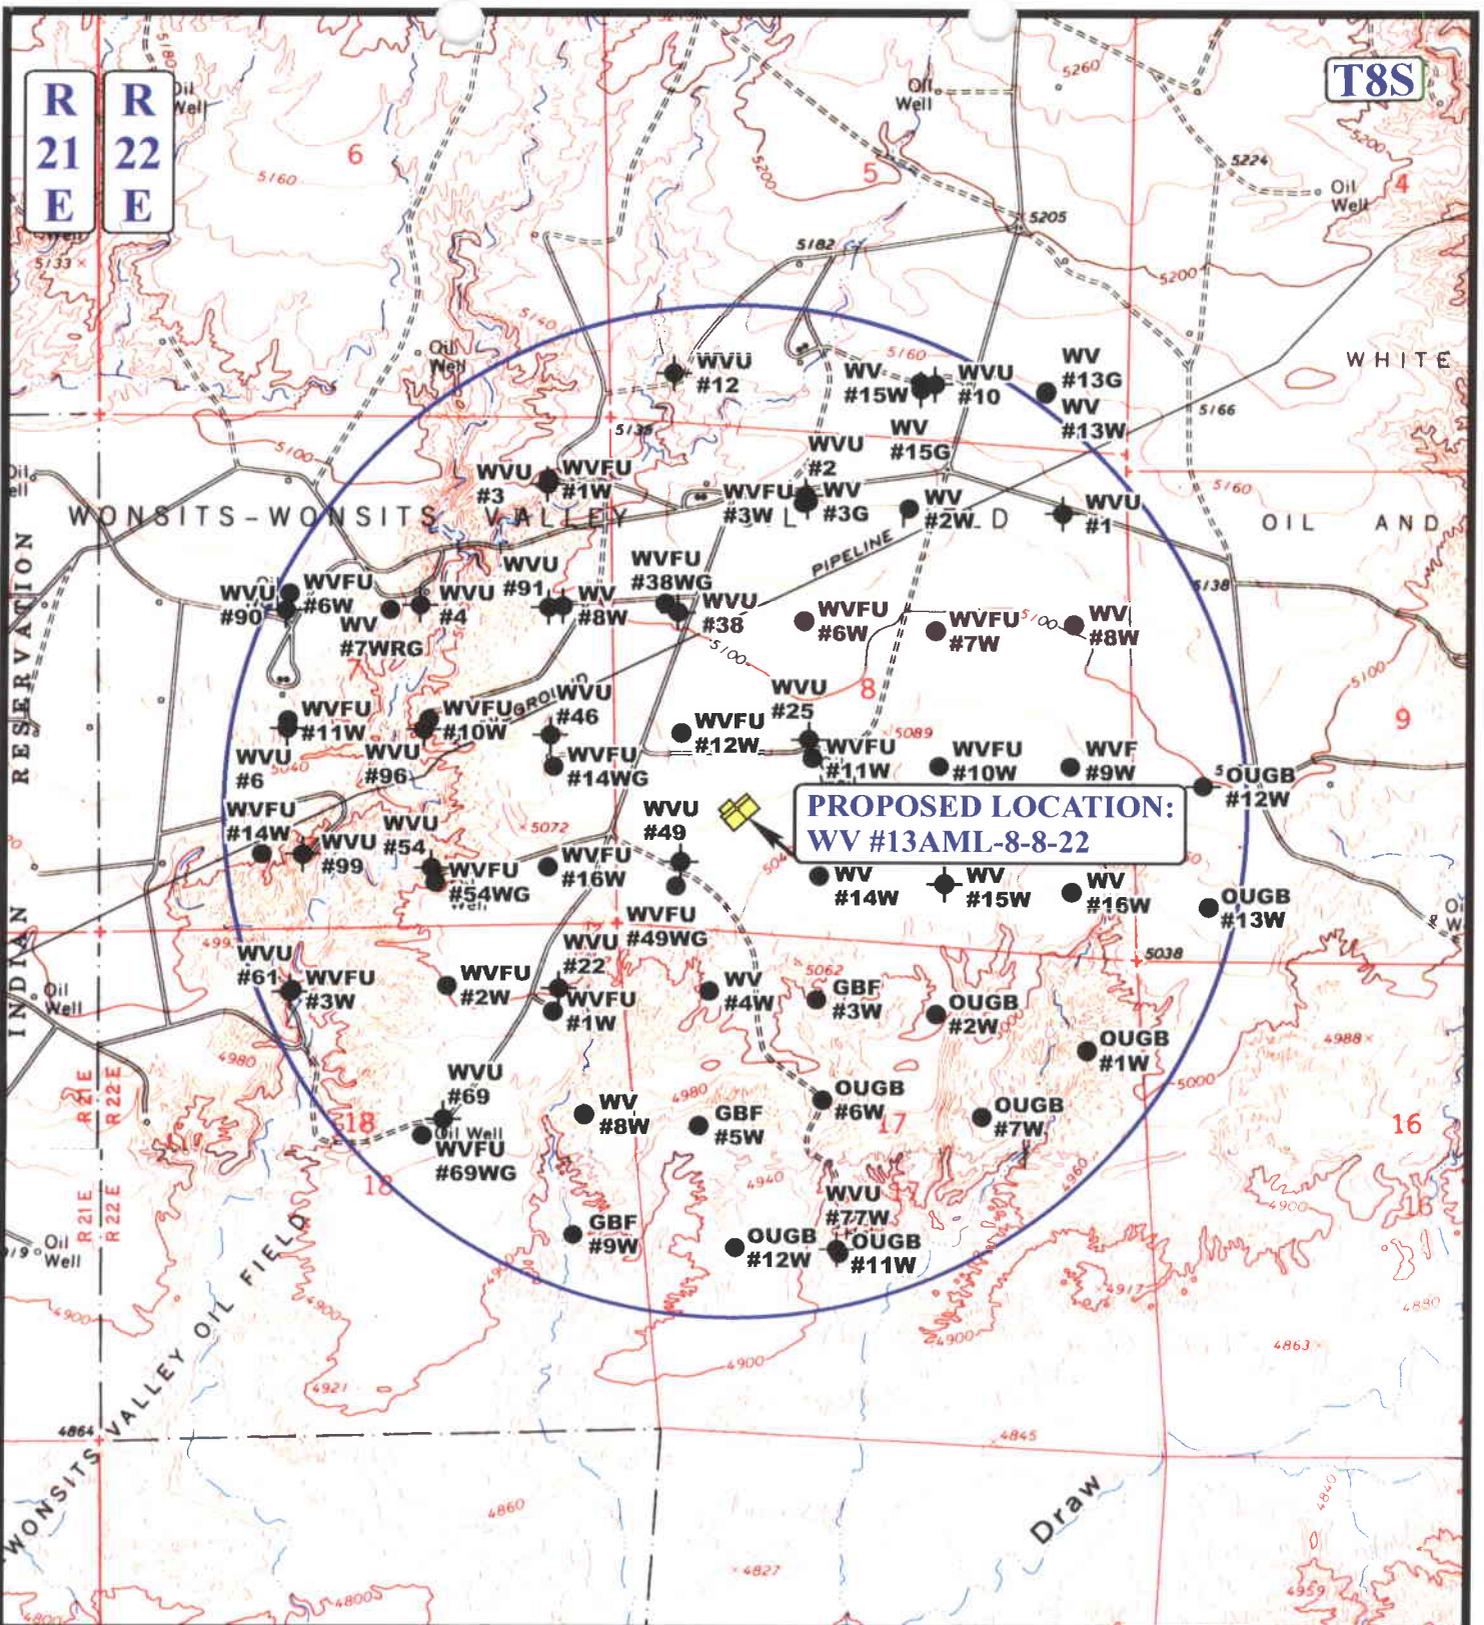

LEGEND:

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ⊗ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED

QUESTAR EXPLR. & PROD.

WV #13AML-8-8-22
SECTION 8, T8S, R22E, S.L.B.&M.
1285' FSL 1252' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813




TOPOGRAPHIC
MAP

01	09	06
MONTH	DAY	YEAR

SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00



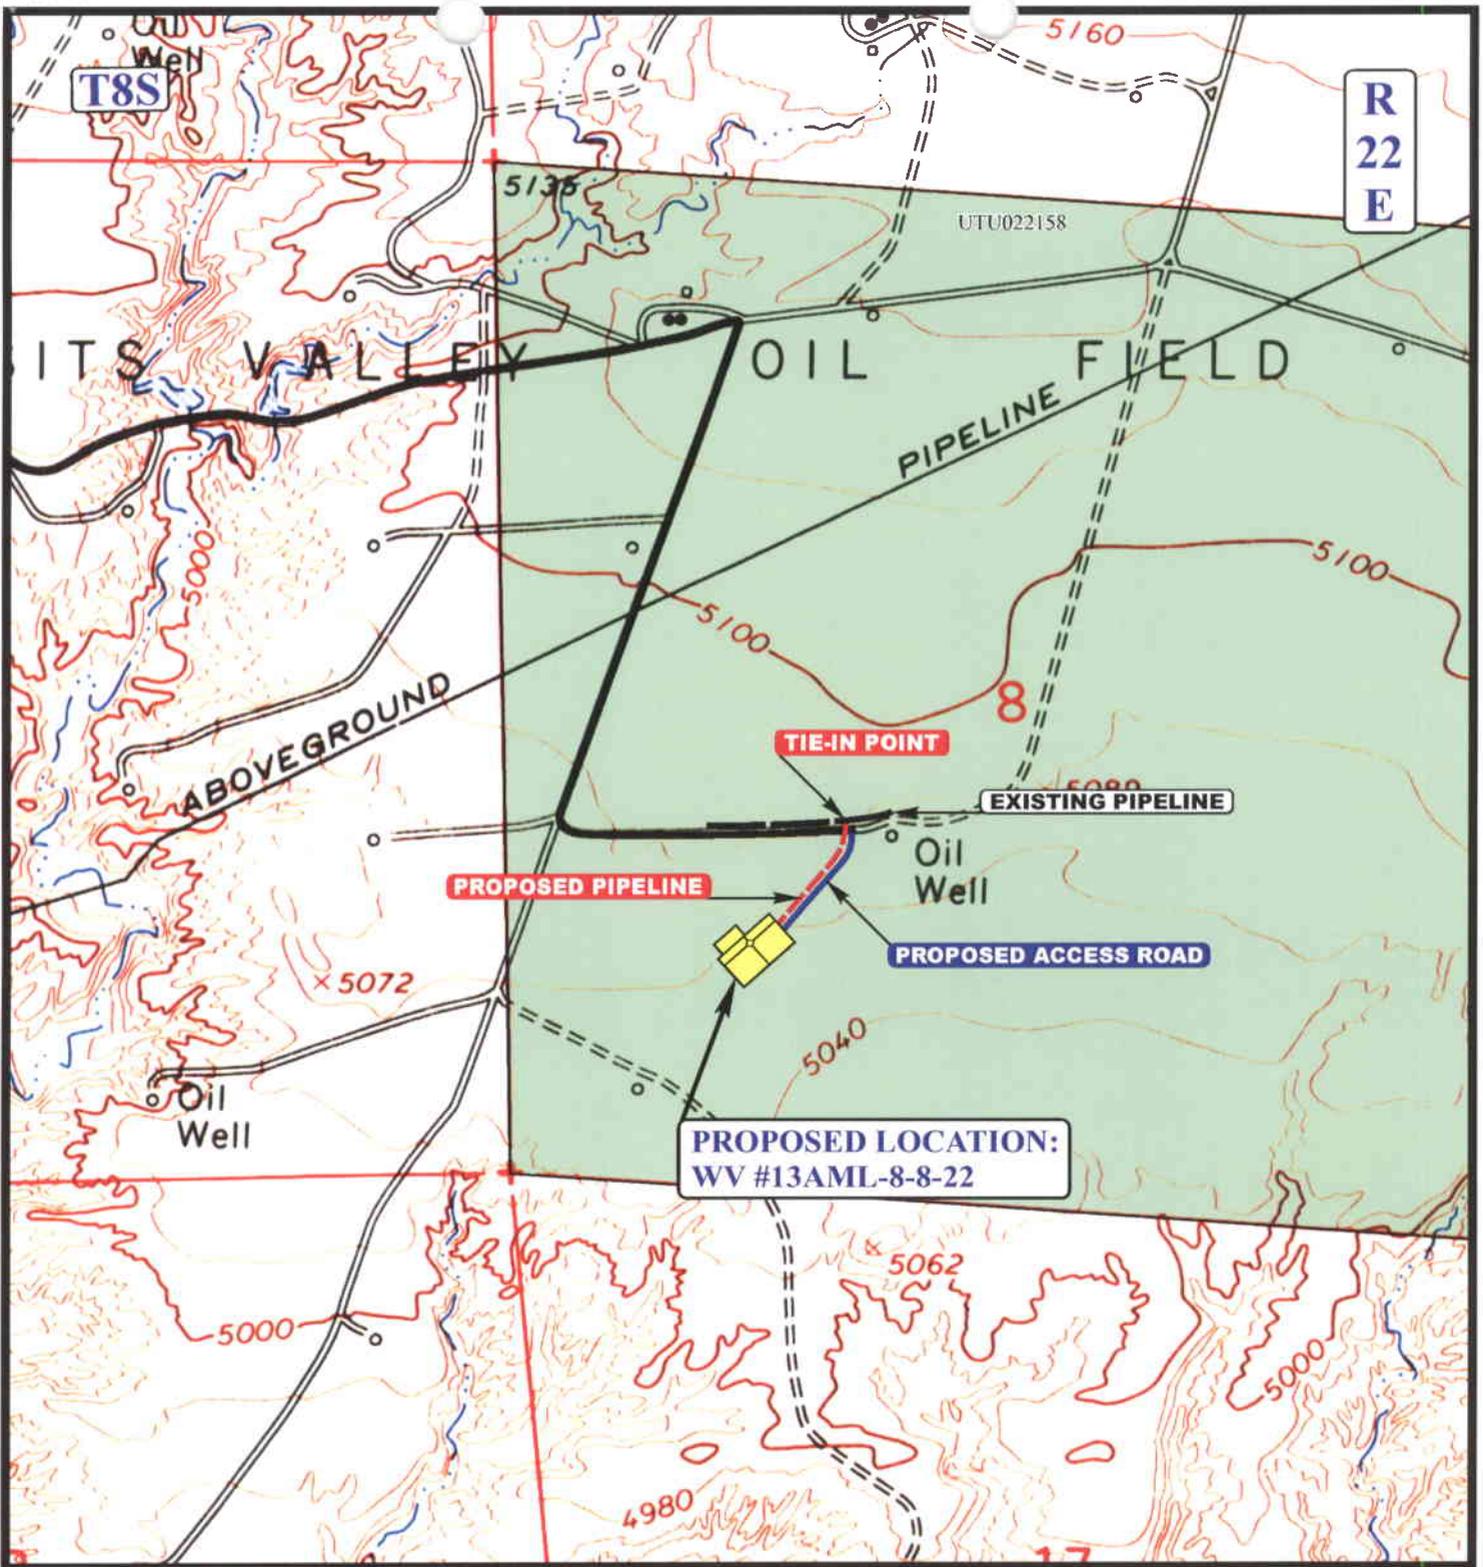

APPROXIMATE TOTAL PIPELINE DISTANCE = 613' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- - - - - EXISTING PIPELINE
- - - - - PROPOSED PIPELINE

QUESTAR EXPLR. & PROD.

WV #13AML-8-8-22
 SECTION 8, T8S, R22E, S.L.B.&M.
 1285' FSL 1252' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP 01 09 06
MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: C.P. REVISED: 00-00-00



**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 03/27/2006

API NO. ASSIGNED: 43-047-37945

WELL NAME: WV 13AML-8-8-22

OPERATOR: QEP UINTA BASIN, INC. (N2460)

CONTACT: JAN NELSON

PHONE NUMBER: 435-781-4331

PROPOSED LOCATION:

SWSW 08 080S 220E
 SURFACE: 1285 FSL 1252 FWL
 BOTTOM: 1285 FSL 1252 FWL
 COUNTY: UINTAH
 LATITUDE: 40.13476 LONGITUDE: -109.4691
 UTM SURF EASTINGS: 630427 NORTHINGS: 4443627
 FIELD NAME: WONSITS VALLEY (710)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal
 LEASE NUMBER: UTU-22158
 SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: MVRD
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. ESB000024)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 49-2153)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)

LOCATION AND SITING:


- R649-2-3.
- Unit: WONSITS VALLEY
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: 187-06
Eff Date: 8-2-01
Siting: 460' fr a boundary
- R649-3-11. Directional Drill

COMMENTS:

Sup. Separate file

STIPULATIONS:

1. Lease Approval

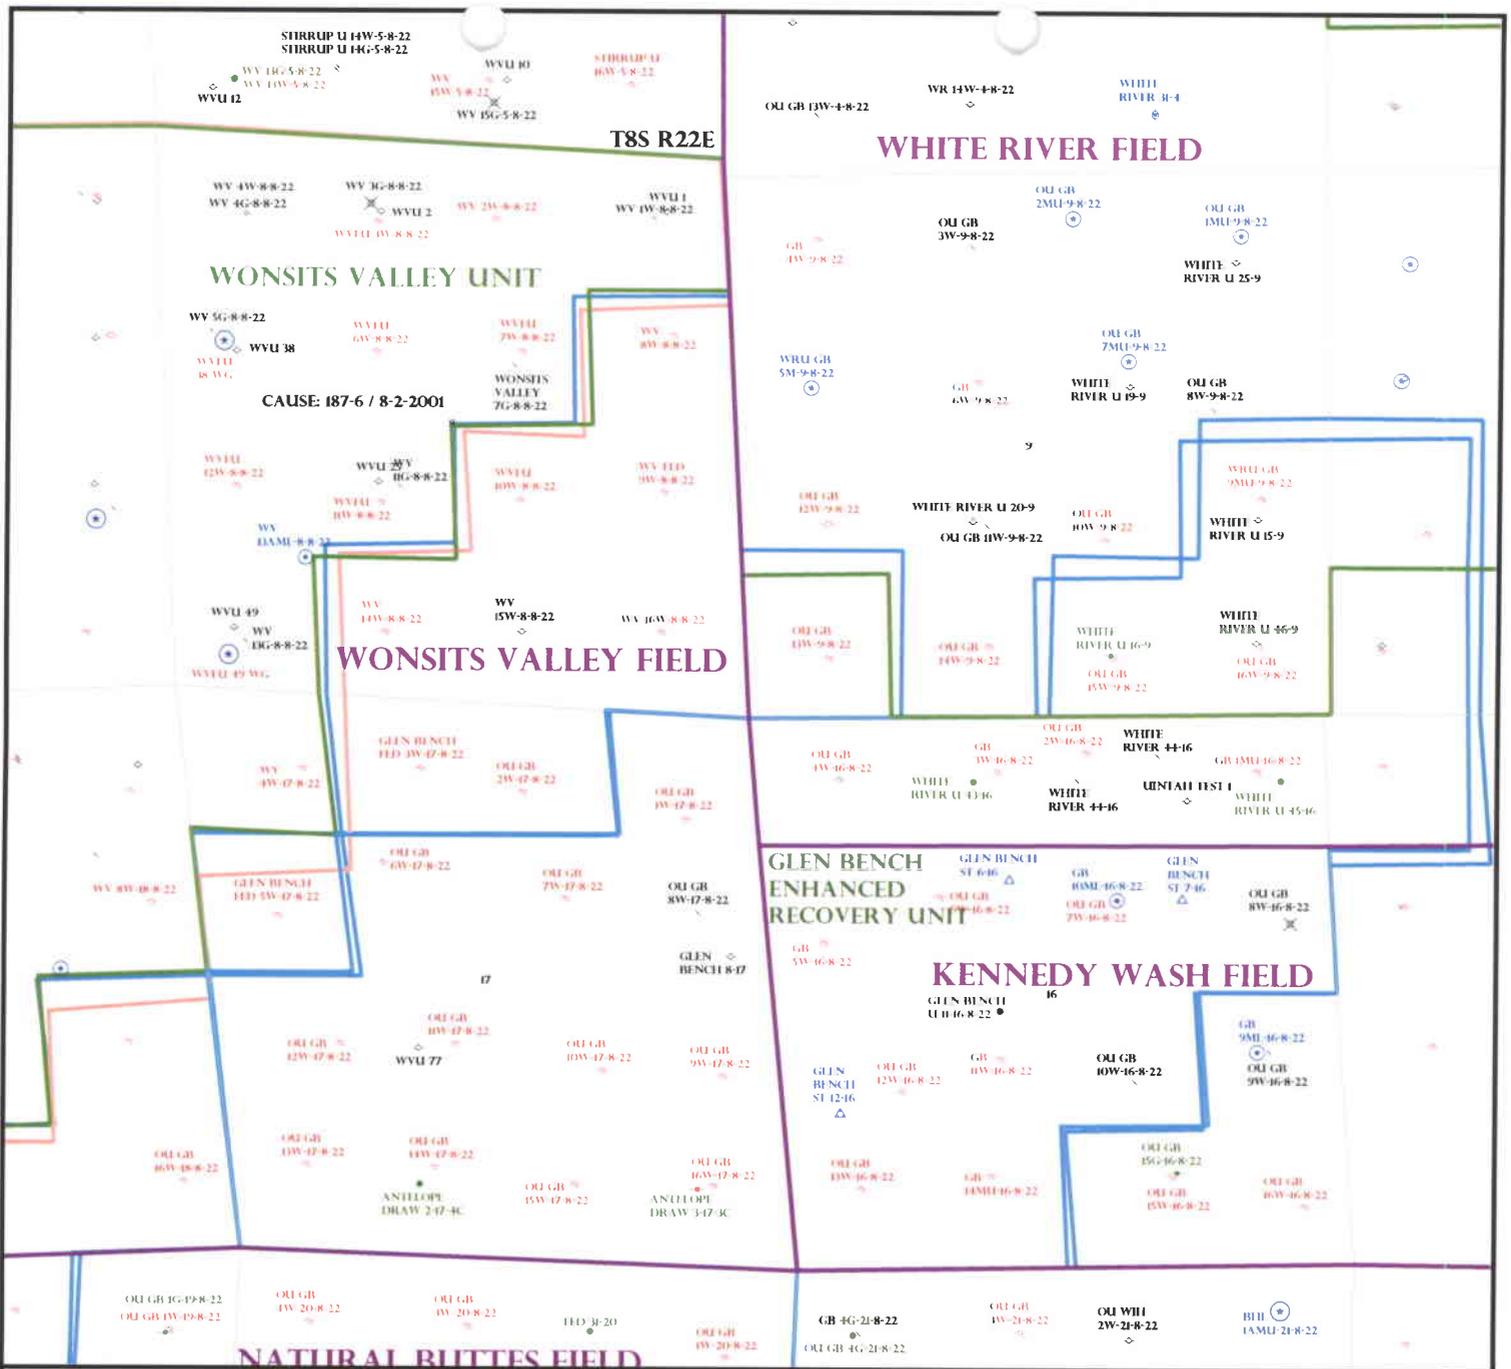

OPERATOR: QEP UINTA BASIN (N2460)

SEC: 8 T. 8S R. 22E

FIELD: WONSITS VALLEY (710)

COUNTY: UINTAH

CAUSE: 187-6 / 8-2-2001

- Field Status**
- ABANDONED
 - ACTIVE
 - COMBINED
 - INACTIVE
 - PROPOSED
 - STORAGE
 - TERMINATED

- Unit Status**
- EXPLORATORY
 - GAS STORAGE
 - NF PP OIL
 - NF SECONDARY
 - PENDING
 - PI OIL
 - PP GAS
 - PP GEOTHERML
 - PP OIL
 - SECONDARY
 - TERMINATED

- Wells Status**
- GAS INJECTION
 - GAS STORAGE
 - LOCATION ABANDONED
 - NEW LOCATION
 - PLUGGED & ABANDONED
 - PRODUCING GAS
 - PRODUCING OIL
 - SHUT-IN GAS
 - SHUT-IN OIL
 - TEMP. ABANDONED
 - TEST WELL
 - WATER INJECTION
 - WATER SUPPLY
 - WATER DISPOSAL
 - DRILLING



PREPARED BY: DIANA WHITNEY
DATE: 4-APRIL-2006



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

April 13, 2006

QEP Uinta Basin, Inc.
11002 E 17500 S
Vernal, UT 84078

Re: Wonsits Valley 13AML-8-8-22 Well, 1285' FSL, 1252' FWL, SW SW, Sec. 8,
T. 8 South, R. 22 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

Appropriate information has been submitted to DOGM and administrative approval of the requested exception location is hereby granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-37945.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: QEP Uinta Basin, Inc.

Well Name & Number Wonsits Valley 13AML-8-8-22

API Number: 43-047-37945

Lease: UTU-22158

Location: SW SW **Sec.** 8 **T.** 8 South **R.** 22 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

RECEIVED

CONFIDENTIAL

Form 3160-3 (July 1992)

MAR 22 2006 UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT BLM VERNAL, UTAH

SUBMIT IN TRIPLICATE*

FORM APPROVED OMB NO. 1040-0136 Expires: February 28, 1995

5. LEASE DESIGNATION AND SERIAL NO. UTU-22158

6. IF INDIAN, ALLOTTEE OR TRIBE NAME N/A

7. UNIT AGREEMENT NAME WONSITS VALLEY UNIT

8. FARM OR LEASE NAME, WELL NO. WV 13AML-8-8-22

9. API NUMBER: 4310A-7137145

10. FIELD AND POOL, OR WILDCAT WONSITS VALLEY UNIT

11. SEC., T, R, M, OR BLK & SURVEY OR AREA SEC. 8, T8S, R22E Mer SLB

12. COUNTY OR PARISH Uintah 13. STATE UT

17. NO. OF ACRES ASSIGNED TO THIS WELL 20

20. BLM/BIA Bond No. on file ESB000024

23. Estimated duration 20 days

TYPE OF WORK DRILL [x] DEEPEN [] TYPE OF WELL [] SINGLE ZONE [x] MULTIPLE ZONE [] OIL WELL [] GAS WELL [x] OTHER []

2. NAME OF OPERATOR QEP UINTA BASIN, INC. Contact: Jan Nelson E-Mail: jan.nelson@questar.com

3. ADDRESS 11002 E. 17500 S. Vernal, Ut 84078 Telephone number Phone 435-781-4331 Fax 435-781-4323

4. LOCATION OF WELL (Report location clearly and in accordance with and State requirements*) At Surface 1285' FSL 1252' FWL, SW 1/4, SEC. 8, T8S, R22E At proposed production zone

14. DISTANCE IN MILES FROM NEAREST TOWN OR POSTOFFICE* 11 +/- EAST OF OURAY, UTAH

15. DISTANCE FROM PROPOSED LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (also to nearest drig, unit line if any) 1252' +/- 16. NO. OF ACRES IN LEASE 1278.24

18. DISTANCE FROM PROPOSED location to nearest well, drilling, completed, applied for, on this lease, ft 19. PROPOSED DEPTH 11330'

21. ELEVATIONS (Show whether DF, RT, GR, ect.) 5053.4' GR 22. DATE WORK WILL START ASAP

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- 1. Well plat certified by a registered surveyor. 2. A Drilling Plan 3. A surface Use Plan (if location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 5. Operator certification. 6. Such other site specific information and/or plans as may be required by the authorized officer.

SIGNED [Signature] Name (printed/typed) Jan Nelson DATE 3-10-06 TITLE Regulatory Affairs (This space for Federal or State office use)

PERMIT NO. APPROVAL DATE

Application approval does not warrant or certify the applicant holds any legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon

CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY [Signature] TITLE Assistant Field Manager DATE 3-23-2006 *See Instructions On Reverse Side

Title 18 U.S.C Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED RECEIVED

SEP 01 2006

DIV. OF OIL, GAS & MINING

***SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

Conditions for Approval are in the APD or SOP

- The buried pipeline exception request has been received. It has been determined that the pipeline route has bedrock exposed at the surface. The exception is granted for a surface pipeline.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work, and contact the Authorized Officer (AO). A report will be prepared by the Paleontologist and submitted to the BLM at the completion of surface disturbing activities.

DOWNHOLE CONDITIONS OF APPROVAL

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

SITE SPECIFIC DOWNHOLE CONDITIONS OF APPROVAL

- Production casing cement shall be brought up and into the surface casing.
- A cement Bond Log (CBL) shall be run from the production casing shoe to the surface casing shoe.

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well. Any changes in operation must have prior approval from the BLM, Vernal Field Office Petroleum Engineers.
- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- **Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.**
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- All shows of fresh water and minerals shall be reported and protected. A sample shall be taken of any water flows and a water analysis furnished the BLM, Vernal Field Office. All oil and gas shows shall be adequately tested for commercial possibilities, reported, and protected.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior

approval of the BLM, Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM, Vernal Field Office shall be obtained and notification given before resumption of operations.

- Chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- Any change in the program shall be approved by the BLM, Vernal Field Office. "Sundry Notices and Reports on Wells" (Form BLM 3160-5) shall be filed for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.
- Emergency approval may be obtained orally, but such approval does not waive the written report requirement. Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan pursuant to Onshore Oil & Gas Order No. 1 of 43 CFR 3164.1 and prior approval by the BLM, Vernal Field Office.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.
- A cement bond log (CBL) will be run from the production casing shoe to the surface casing shoe and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease shall have prior written approval from the BLM, Vernal Field Office.
- All measurement points shall be identified as point of sales or allocation for royalty determination prior to the installation of facilities.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The Field Office

Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM, Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement.

- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM, Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- This APD is approved subject to the requirement that, should the well be successfully completed for production, the BLM, Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and / or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from Field Office Petroleum Engineers.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in

order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

Form 3160-5
(November 1994)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires July 31, 1996

5. Lease Serial No.

UT#-22158

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA/Agreement, Name and/or No.

Wonsits Valley Unit

8. Well Name and No.

WV 13AML-8-8-22

9. API Well No.

43-047-37945

10. Field and Pool, or Exploratory Area

Wonsits Valley

11. County or Parish, State

Uintah

SUBMIT IN TRIPLICATE - Other Instructions on reverse side

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

QEP Uinta Basin, Inc.

Contact: Darryl knop

3a. Address

11002 East 17500 South, Vernal, UT 84078

3b. Phone No. (include area code)

435-828-0394

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1285' FSL, 1252' FWL, SW 1/4, Section 8, T8S, R22E

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize
<input type="checkbox"/> Subsequent Report	<input checked="" type="checkbox"/> Alter Casing
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Change Plans
	<input type="checkbox"/> Convert to Injection
	<input type="checkbox"/> Deepen
	<input type="checkbox"/> Fracture Treat
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Plug and Abandon
	<input type="checkbox"/> Plug Back
	<input type="checkbox"/> Production (Start/Resume)
	<input type="checkbox"/> Reclamation
	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Water Disposal
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Well Integrity
	<input checked="" type="checkbox"/> Other <u>TD Change</u>

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomple horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once Testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

QEP Uinta Basin Inc. proposes to add 7" intermediate casing to 7,800' to cover up potential loss circulation zones. Attached is a new 8-Point plan showing the new setting depth and cement program and TD Change. The original TD was 11,330' the new proposed TD will be 11,600'.

Approved by the
Utah Division of
Oil, Gas and Mining

COPY SENT TO OPERATOR
Date: 10-23-06
Initials: DM

Federal Approval of this
Action is Necessary

Date: 10-19-06
By: [Signature]

RECEIVED
OCT 17 2006

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) Jan Nelson	Title Regulatory Affairs
Signature [Signature]	Date October 13, 2006

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

DRILLING PROGRAM

ONSHORE OIL & GAS ORDER NO. 1
Approval of Operations on Onshore
Federal Oil and Gas Leases

All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas No. 1, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

1. **Formation Tops**

The estimated tops of important geologic markers are as follows:

<u>Formation</u>	<u>Depth, TVD</u>
Uinta	Surface
Green River	2,970'
Mahogany	3,760'
Wasatch	6,290'
Mesaverde	9,185'
Sego	11,395'
TD	11,600'

2. **Anticipated Depths of Oil Gas Water and Other Mineral Bearing Zones**

The estimated depths at which the top and bottom of the anticipated water, oil, gas, or other mineral bearing formations are expected to be encountered are as follows:

<u>Substance</u>	<u>Formation</u>	<u>Depth, TVD</u>
Gas	Wasatch	6,290'
Gas	Mesaverde	9,185'

All fresh water and prospectively valuable minerals encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

All water shows and water-bearing sands will be reported to the BLM in Vernal, Utah. Copies of State of Utah form OGC-8-X are acceptable. If flows are detected, samples will be submitted to the BLM along with any water analyses conducted. Fresh water will be obtained from Wonsits Valley water right # A36125 (which was filed on May 7, 1964,) or Red Wash water right # 49-2153 (which was filed on March 25, 1960). It was determined by the Fish and Wildlife Service that any water right number filed before 1989 is not depleting to the Upper Colorado River System, to supply fresh water for drilling purposes. All water resulting from drilling operations will be disposed of at Red Wash Central

DRILLING PROGRAM

Battery Disposal Site; SWSE, Section 27, T7S, R23E or Wonsits Valley Disposal Site; SWNW, Section 12, T8S, R21E.

3. Operator's Specification for Pressure Control Equipment:

- A. 5,000 psi W.P. Double Gate BOP, 5,000 psi annular (schematic attached)
- B. Functional test daily
- C. All casing strings shall be pressure tested (0.22 psi/foot or 1500 psi, whichever is greater) prior to drilling the plug after cementing; test pressure shall not exceed the internal yield pressure of the casing.
- D. Ram type preventers and associated equipment shall be tested to approved stack working pressure if isolated by test plug or to 50 percent of internal yield pressure of casing whichever is less. BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc..., for a 5M system and individual components shall be operable as designed.

4. Casing Program

Hole Size	Csg. Size	Top (MD)	Bottom (MD)	Wt.	Grade	Thread	Cond.
20"	14"	sfc	40'	Steel	Cond.	None	Used
12-1/4"	9-5/8"	sfc	450'	36.0	J-55	STC	New
8-3/4"	7"	sfc	7,800'	26.0	J-55	LTC	New
6-1/8"	4-1/2"	sfc	11,600'	11.6	P-110	LTC	New

Casing Strengths:				Collapse	Burst	Tensile (minimum)
9-5/8"	36.0 lb.	J-55	STC	2,020 psi	3,520 psi	394,000 lb.
7"	26.0 lb.	J-55	LTC	4,320 psi	4,980 psi	367,000 lb.
4-1/2"	11.6 lb.	P-110	LTC	7,580 psi	10,690 psi	279,000 lb.

DRILLING PROGRAM

5. Auxiliary Equipment

- A. Kelly Cock – yes
- B. Float at the bit – no
- C. Monitoring equipment on the mud system – visually and/or PVT/Flow Show
- D. Full opening safety valve on the rig floor – yes
- E. Rotating Head – yes
- F. If drilling with air the following will be used:
 - G. The blooie line shall be at least 6” in diameter and extend at least 100’ from the well bore into the reserve/blooie pit.
 - H. Blooie line ignition shall be provided by a continuous pilot (ignited when drilling below 500’).
 - I. Compressor shall be tied directly to the blooie line through a manifold.
 - J. A mister with a continuous stream of water shall be installed near the end of the blooie lines for dust suppression.

Surface hole will be drilled with air, air/mist, foam, or mud depending on hole conditions. Drilling below surface casing will be with water based drilling fluids consisting primarily of fresh water, bentonite, lignite, caustic, lime, soda ash and polymers. No chromates will be used. It is not intended to use oil in the mud, however, in the event it is used, oil concentration will be less than 4% by volume. Maximum anticipated mud weight is 11.5 ppg.

No minimum quantity of weight material will be required to be kept on location.

PVT/Flow Show will be used from base of surface casing to TD.

Gas detector will be used from surface casing depth to TD.

DRILLING PROGRAM

6. **Testing, logging and coring program**

- A. Cores – none anticipated
- B. DST – none anticipated
- C. Logging – Mud Logging – 1500' to TD
GR-SP-Induction
Neutron Density
- D. Formation and Completion Interval: Green River/Wasatch/Mesaverde interval, final determination of completion will be made by analysis of logs.
Stimulation: Stimulation will be designed for the particular area of interest as encountered.

7. **Cementing Program**

14" Conductor:

Cement to surface with construction cement.

9-5/8" Surface Casing: sfc - 450' (MD)

Lead/Tail Slurry: 0' – 450'. 240 sks (280 cu ft) Premium AG cement + 2% CaCl₂ + 0.25 lb/sk celloflake. Slurry wt: 15.8 ppg, Slurry yield: 1.17 ft³/sk, Slurry volume: 12-1/4" hole + 100% excess.

7" Intermediate Casing: sfc - 7,800' (MD)

Lead Slurry: 0' – 5,500'. 315 sks (1215 cu ft) Halliburton Hi-Fill cement. Slurry wt: 11.0 ppg, Slurry yield: 3.86 ft³/sk, Slurry volume: 8-3/4" hole + 50% excess in open hole section.

Tail Slurry: 5,500' – 7,800'. 420 sks (520 cu ft) of 50/50 Poz Premium AG + 2.0% Bentonite + 0.6% Halad (R)-322 fluid loss + 2.0% Microbond M expander + 5% salt + 0.25 lb/sk Flocele. Slurry wt: 14.35 ppg, Slurry yield: 1.24 ft³/sk, Slurry volume: 8-3/4" hole + 50% excess.

4-1/2" Production Casing: sfc - 11,600' (MD)

Lead Slurry: 0' - 5,500'. 150 sks (575 cu ft) Halliburton Hi-Fill cement + 16% Bentonite + 0.75% Econolite + 3% salt + 0.8% HR-7 retarder. Slurry wt: 11.0 ppg, Slurry yield: 3.84 ft³/sk, Slurry volume: 4-1/2" casing inside 7" casing.

Tail Slurry: 5,500' – 11,600'. 745 sks (925 cu ft) of 50/50 Poz Premium AG + 2.0% Bentonite + 0.6% Halad (R)-322 fluid loss + 2.0% Microbond M expander + 5% salt + 0.2% HR-5 retarder + 0.25 lb/sk Flocele. Slurry wt: 14.35 ppg, Slurry yield: 1.24 ft³/sk, Slurry volume: 6-1/8" hole + 20% excess in open hole section.

DRILLING PROGRAM

*Final cement volumes to be calculated from caliper log with an attempt to be made to circulate cement to the surface. A bond log will be run across the zone of interest and across zones as required by the authorized officer to insure protection of natural resources.

8. Anticipated Abnormal Pressures and Temperatures, Other Potential Hazards

No abnormal temperatures or pressures are anticipated. No H₂S has been encountered in or known to exist from previous wells drilled to similar depths in the general area. Maximum anticipated bottom hole pressure equals approximately 6,935 psi. Maximum anticipated bottom hole temperature is 220° F.

5M BOP STACK

11" Rotating Head

11" Spacer Spool

11" 5M Annular

11" 5M Double Ram

2" Kill Line

3" Choke Line


G.L.


2" 5M Check Manual 2" 5M Manual

3" 5M Manual 3" 5M HGR

11" 5M x 5M Multi-Bowl Head

9 5/8" 5M Casing Head

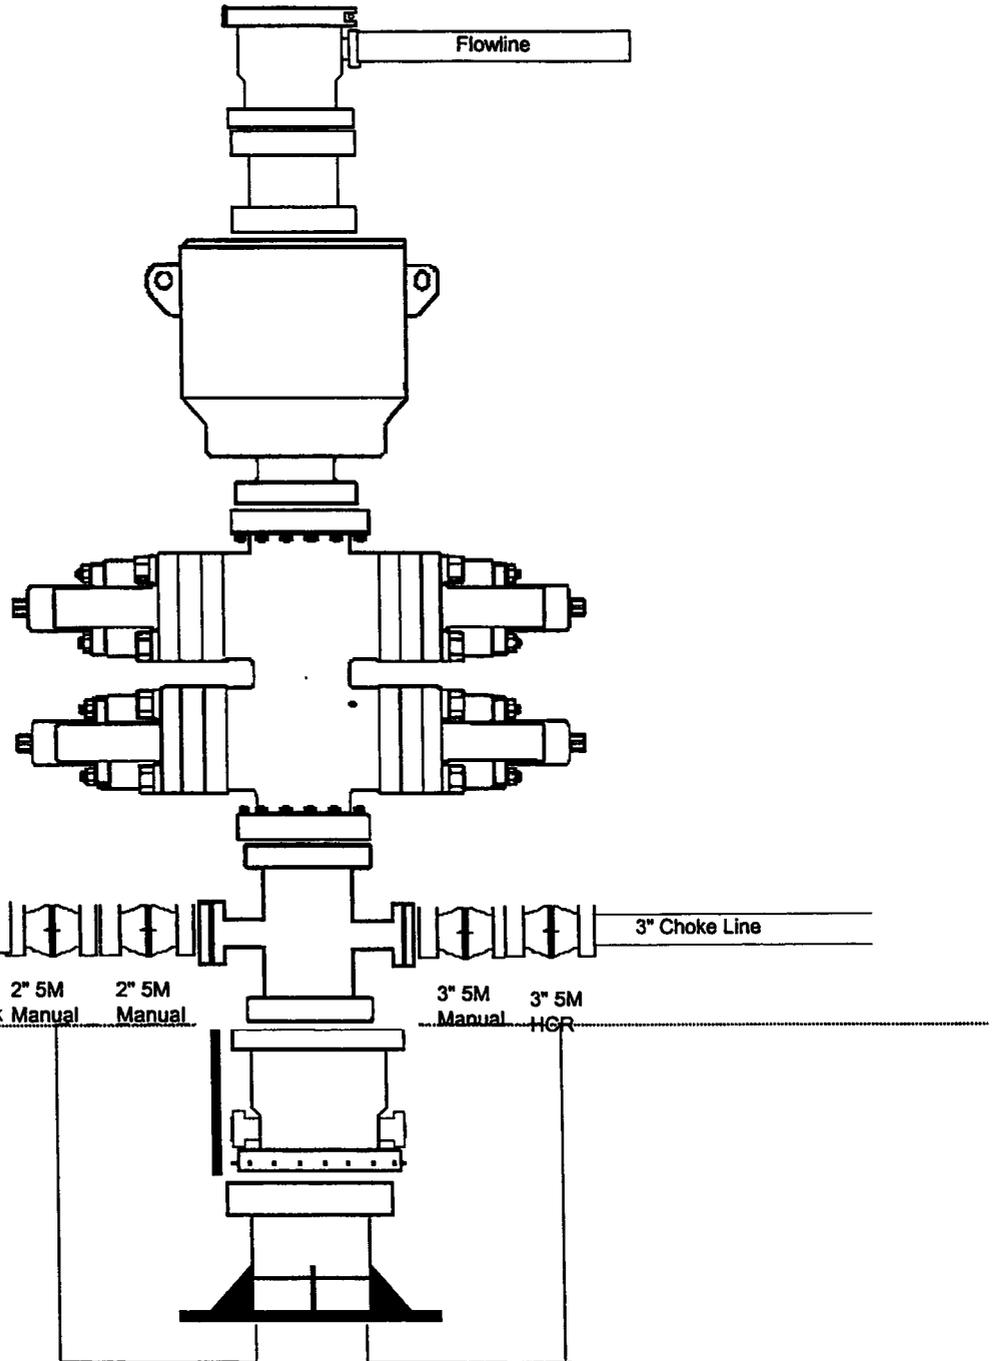

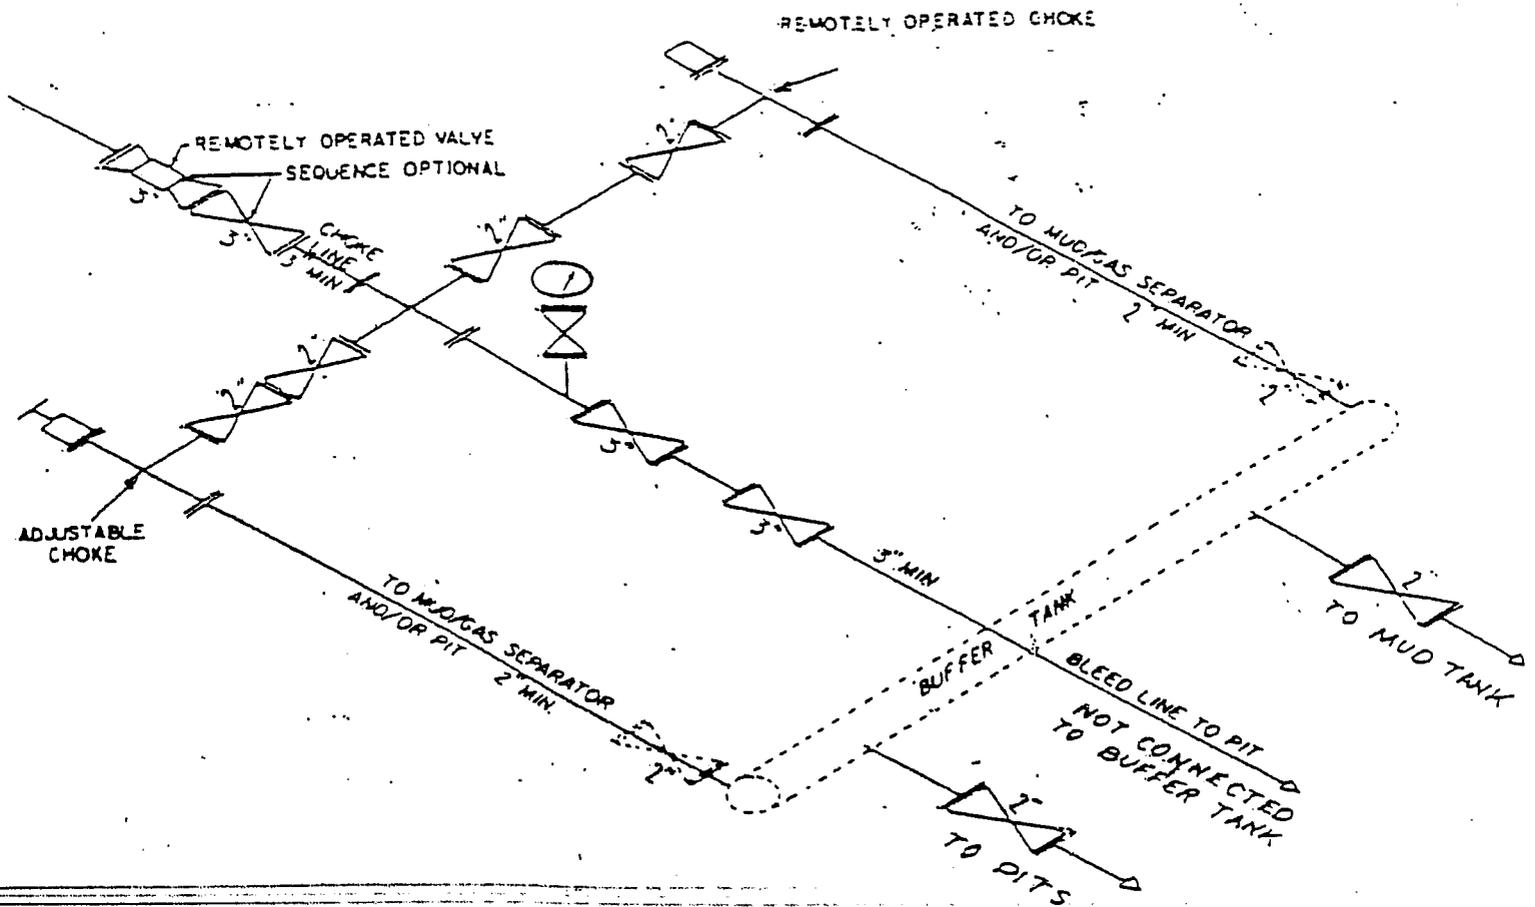

② 5M CHOKE MANIFOLD EQUIPMENT — CONFIGURATION OF CHOKES MAY VARY

**Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET**

ROUTING
1. DJJ
2. CDW

Change of Operator (Well Sold)

X - Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

1/1/2007

FROM: (Old Operator): N2460-QEP Uinta Basin, Inc. 1050 17th St, Suite 500 Denver, CO 80265 Phone: 1 (303) 672-6900	TO: (New Operator): N5085-Questar E&P Company 1050 17th St, Suite 500 Denver, CO 80265 Phone: 1 (303) 672-6900
---	--

CA No.		Unit:		WONSITS VALLEY UNIT				
WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
SEE ATTACHED LISTS				*				

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 4/19/2007
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 4/16/2007
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 1/31/2005
- Is the new operator registered in the State of Utah: Business Number: 764611-0143
- (R649-9-2)Waste Management Plan has been received on: IN PLACE
- Inspections of LA PA state/fee well sites complete on: n/a
- Reports current for Production/Disposition & Sundries on: n/a
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 4/23/2007 BIA
- Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: 4/23/2007
- Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: _____
- Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: _____

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 4/30/2007 and 5/15/2007
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 4/30/2007 and 5/15/2007
- Bond information entered in RBDMS on: 4/30/2007 and 5/15/2007
- Fee/State wells attached to bond in RBDMS on: 4/30/2007 and 5/15/2007
- Injection Projects to new operator in RBDMS on: 4/30/2007 and 5/15/2007
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: ESB000024
- Indian well(s) covered by Bond Number: 799446
- (R649-3-1) The **NEW** operator of any state/fee well(s) listed covered by Bond Number 965003033
- The **FORMER** operator has requested a release of liability from their bond on: n/a

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **NEW** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: n/a

COMMENTS: THIS IS A COMPANY NAME CHANGE.

SOME WELL NAMES HAVE BEEN CHANGED AS REQUESTED

QEP Uinta Basin (N2460) to QUESTAR E and P (N5085)
WONSITS VALLEY UNIT

4/30/2007 and 5/15/2007

Original Well Name	Well Name & No.	Q/Q	SEC	TWP	RNG	API	Entity	Lease	Well Type	Status
WVU 16	WV 16	NENE	15	080S	210E	4304715447	5265	Federal	WI	A
WVU 31	WV 31	NENW	14	080S	210E	4304715460	5265	Federal	WI	A
WVU 35	WV 35	NESW	14	080S	210E	4304715463	5265	Federal	WI	A
WV 36	WV 36	NESW	10	080S	210E	4304715464	5265	Federal	WI	A
WVU 41	WV 41	NENW	15	080S	210E	4304715469	5265	Federal	WI	A
WV 43	WV 43	SWSW	11	080S	210E	4304715471	5265	Federal	OW	P
WV 48	WV 48	SWNE	10	080S	210E	4304715476	5265	Federal	OW	P
WVU 50	WV 50	SWNE	15	080S	210E	4304715477	5265	Federal	WI	A
WV 53	WV 53	SWSE	10	080S	210E	4304720003	5265	Federal	OW	P
WVU 55	WV 55	SWNE	14	080S	210E	4304720005	5265	Federal	OW	P
WVU 59	WV 59	SWNW	14	080S	210E	4304720018	5265	Federal	WI	A
WVU 60	WV 60	SWSE	15	080S	210E	4304720019	5265	Federal	WI	A
WV 62	WV 62	SWSW	10	080S	210E	4304720024	5265	Federal	OW	P
WVU 65	WV 65	SWNW	15	080S	210E	4304720041	5265	Federal	OW	P
WVU 67	WV 67	NESW	15	080S	210E	4304720043	5265	Federal	WI	A
WVU 68	WV 68	NESE	15	080S	210E	4304720047	5265	Federal	WI	A
WVU 83	WV 83 WG	NENW	23	080S	210E	4304720205	14864	Federal	GW	S
WV 97	WV 97	NWSW	11	080S	210E	4304730014	5265	Federal	WI	A
WVU 103	WV 103	NWNW	14	080S	210E	4304730021	5265	Federal	OW	P
WVU 104	WV 104	NWNE	15	080S	210E	4304730022	5265	Federal	OW	P
WV 105	WV 105	SESE	10	080S	210E	4304730023	5265	Federal	OW	P
WVU 109	WV 109	SENE	15	080S	210E	4304730045	5265	Federal	OW	P
WVU 110	WV 110	SENE	14	080S	210E	4304730046	5265	Federal	OW	P
WVU 112	WV 112	SENE	15	080S	210E	4304730048	5265	Federal	OW	P
WVU 124	WV 124	NWSE	15	080S	210E	4304730745	5265	Federal	OW	P
WVU 126	WV 126	NWNE	21	080S	210E	4304730796	5265	Federal	WI	A
WV 128	WV 128	SESW	10	080S	210E	4304730798	5265	Federal	OW	P
WVU 132	WV 132	NWSW	15	080S	210E	4304730822	5265	Federal	OW	P
WVU 136	WV 136	NENW	21	080S	210E	4304731047	5265	Federal	OW	S
WV 137	WV 137	SENE	11	080S	210E	4304731523	5265	Federal	OW	P
WV 28-2	WV 28-2	NESW	11	080S	210E	4304731524	99990	Federal	WI	A
WVU 133	WV 133	SESW	15	080S	210E	4304731706	5265	Federal	OW	P
WVU 140	WV 140	NWNW	15	080S	210E	4304731707	5265	Federal	WI	A
WV 40-2	WV 40-2	NESE	10	080S	210E	4304731798	5265	Federal	WI	A
WVU 144	WV 144	SENE	10	080S	210E	4304731807	5265	Federal	OW	P
WV 143	WV 143	NWSE	10	080S	210E	4304731808	5265	Federal	WI	A
WVU 145	WV 145	NWNW	18	080S	220E	4304731820	14864	Federal	GW	P
WVU 121	WV 121	NWSW	14	080S	210E	4304731873	5265	Federal	OW	TA
WVU 135-2	WV 135-2	NENE	21	080S	210E	4304732016	5265	Federal	OW	P
WVU 130	WV 130	NWNW	22	080S	210E	4304732307	5265	Federal	OW	P
WVU 71-2	WV 71-2	SWSW	15	080S	210E	4304732449	5265	Federal	WI	A

QEP Uinta Basin (N2460) to QUESTAR E and P (N5085)
WONSITS VALLEY UNIT

4/30/2007 and 5/15/2007

Original Well Name	Well Name & No.	Q/Q	SEC	TWP	RNG	API	Entity	Lease	Well Type	Status
WVFU 119	WV 119	NWNW	21	080S	210E	4304732461	5265	Federal	OW	P
WVFU 120	WV 120	NENW	22	080S	210E	4304732462	5265	Federal	WI	A
WVFU 54 WG	WV 54 WG	SWSE	07	080S	220E	4304732821	14864	Federal	GW	P
WVFU 69 WG	WV 69 WG	SWNE	18	080S	220E	4304732829	14864	Federal	GW	P
WVFU 38 WG	WV 38 WG	SWNW	08	080S	220E	4304732831	14864	Federal	GW	P
WVFU 49 WG	WV 49 WG	SWSW	08	080S	220E	4304732832	14864	Federal	GW	P
WVFU 138 WG	WV 138 WG	SWNW	18	080S	220E	4304733054	14864	Federal	GW	P
WVFU 14 WG	WV 14 WG	SWSE	12	080S	210E	4304733070	14864	Federal	GW	P
WVFU 11 WG	WV 11 WG	SWNE	12	080S	210E	4304733085	14864	Federal	GW	P
WVFU 81 WG	WV 81 WG	SWNW	24	080S	210E	4304733086	14864	Federal	GW	P
WVFU 146 WG	WV 146 WG	NWNW	19	080S	220E	4304733128	14864	Federal	GW	P
WVFU 1W-14-8-21	WV 1W-14-8-21	NENE	14	080S	210E	4304733220	14864	Federal	GW	P
WVFU 5W-13-8-21	WV 5W-13-8-21	SWNW	13	080S	210E	4304733221	14864	Federal	GW	P
WVFU 46 WG	WVFU 46 WG	NESE	07	080S	220E	4304733241	14864	Federal	GW	P
WVFU 9W-14-8-21	WV 9W-14-8-21	NESE	14	080S	210E	4304733269	14864	Federal	GW	P
WVFU 7W-13-8-21	WV 7W-13-8-21	SWNE	13	080S	210E	4304733270	14864	Federal	GW	P
WVFU 1W-18-8-22	WV 1W-18-8-22	NENE	18	080S	220E	4304733294	14864	Federal	GW	P
WVFU 11W-8-8-22	WV 11W-8-8-22	NESW	08	080S	220E	4304733295	14864	Federal	GW	P
WVFU 3W-8-8-22	WV 3W-8-8-22	NENW	08	080S	220E	4304733493	14864	Federal	GW	S
WVFU 5W-7-8-22	WV 5W-7-8-22	SWNW	07	080S	220E	4304733494	14864	Federal	GW	P
WVFU 11W-7-8-22	WV 11W-7-8-22	NESW	07	080S	220E	4304733495	14864	Federal	GW	P
WVFU 13W-7-8-22	WV 13W-7-8-22	SWSW	07	080S	220E	4304733496	14864	Federal	GW	P
WVFU 1W-7-8-22	WV 1W-7-8-22	NENE	07	080S	220E	4304733501	14864	Federal	GW	P
WVFU 3W-7-8-22	WV 3W-7-8-22	NENW	07	080S	220E	4304733502	14864	Federal	GW	P
WV 7WRG-7-8-22	WV 7WRG-7-8-22	SWNE	07	080S	220E	4304733503	5265	Federal	OW	P
WVFU 16W-9-8-21	WV 16W-9-8-21	SESE	09	080S	210E	4304733529	14864	Federal	GW	P
WVFU 1W-12-8-21	WV 1W-12-8-21	NENE	12	080S	210E	4304733531	14864	Federal	GW	P
WVFU 1W-13-8-21	WV 1W-13-8-21	NENE	13	080S	210E	4304733532	14864	Federal	GW	P
WVFU 3W-18-8-22	WV 3W-18-8-22	NENW	18	080S	220E	4304733533	14864	Federal	GW	P
WVFU 9W-12-8-21	WV 9W-12-8-21	NESE	12	080S	210E	4304733534	14864	Federal	GW	P
WVFU 11W-12-8-21	WV 11W-12-8-21	NESW	12	080S	210E	4304733535	14864	Federal	GW	P
WVFU 11W-13-8-21	WV 11W-13-8-21	NESW	13	080S	210E	4304733536	14864	Federal	GW	P
WVFU 13W-12-8-21	WV 13W-12-8-21	SWSW	12	080S	210E	4304733537	14864	Federal	GW	S
WVFU 13W-18-8-22	WV 13W-18-8-22	SWSW	18	080S	220E	4304733538	14864	Federal	GW	P
WVFU 16G-9-8-21	WV 16G-9-8-21	SESE	09	080S	210E	4304733565	5265	Federal	OW	P
WVFU 1W-21-8-21	WV 1W-21-8-21	NENE	21	080S	210E	4304733602	14864	Federal	GW	P
WVFU 3W-13-8-21	WV 3W-13-8-21	NENW	13	080S	210E	4304733603	14864	Federal	GW	S
WVFU 3W-22-8-21	WV 3W-22-8-21	NENW	22	080S	210E	4304733604	14864	Federal	GW	P
WVFU 3W-24-8-21	WV 3W-24-8-21	NENW	24	080S	210E	4304733605	14864	Federal	GW	P
WVFU 13W-13-8-21	WV 13W-13-8-21	SWSW	13	080S	210E	4304733606	14864	Federal	GW	S
WVFU 13W-14-8-21	WV 13W-14-8-21	SWSW	14	080S	210E	4304733607	14864	Federal	GW	P

QEP Uinta Basin (N2460) to QUESTAR E and P (N5085)
WONSITS VALLEY UNIT

4/30/2007 and 5/15/2007

Original Well Name	Well Name & No.	Q/Q	SEC	TWP	RNG	API	Entity	Lease	Well Type	Status
WVFU 15W-13-8-21	WV 15W-13-8-21	SWSE	13	080S	210E	4304733608	14864	Federal	GW	S
WVFU 1W-24-8-21	WV 1W-24-8-21	NENE	24	080S	210E	4304733613	14864	Federal	GW	P
WVFU 11W-18-8-22	WV 11W-18-8-22	NESW	18	080S	220E	4304733626	14864	Federal	GW	P
WV 2W-10-8-21	WV 2W-10-8-21	NWNE	10	080S	210E	4304733655	14864	Federal	GW	P
WV 4W-11-8-21	WV 4W-11-8-21	NWNW	11	080S	210E	4304733657	14864	Federal	GW	P
WV 12W-10-8-21	WV 12W-10-8-21	NWSW	10	080S	210E	4304733659	14864	Federal	GW	S
WV 12G-10-8-21	WV 12G-10-8-21	NWSW	10	080S	210E	4304733660	5265	Federal	OW	P
WVFU 15W-9-8-21	WV 15W-9-8-21	SWSE	09	080S	210E	4304733661	14864	Federal	GW	P
WVFU 15G-9-8-21	WV 15G-9-8-21	SWSE	09	080S	210E	4304733662	5265	Federal	OW	P
WVFU 2W-13-8-21	WV 2W-13-8-21	NWNE	13	080S	210E	4304733791	14864	Federal	GW	P
WVFU 6W-13-8-21	WV 6W-13-8-21	SENE	13	080S	210E	4304733792	14864	Federal	GW	P
WVFU 8W-13-8-21	WV 8W-13-8-21	SENE	13	080S	210E	4304733793	14864	Federal	GW	P
WV 10W-1-8-21	WV 10W-1-8-21	NWSE	01	080S	210E	4304733794	14864	Federal	GW	TA
WVFU 10W-13-8-21	WV 10W-13-8-21	NWSE	13	080S	210E	4304733795	14864	Federal	GW	P
WVFU 12W-7-8-22	WV 12W-7-8-22	NWSW	07	080S	220E	4304733808	14864	Federal	GW	P
WVFU 6W-8-8-22	WV 6W-8-8-22	SENE	08	080S	220E	4304733811	14864	Federal	GW	P
WVFU 7W-8-8-22	WV 7W-8-8-22	SWNE	08	080S	220E	4304733812	14864	Federal	GW	S
WVFU 10W-7-8-22	WV 10W-7-8-22	NWSE	07	080S	220E	4304733813	14864	Federal	GW	P
WVFU 12W-8-8-22	WV 12W-8-8-22	NWSW	08	080S	220E	4304733815	14864	Federal	GW	P
WVFU 14W-7-8-22	WV 14W-7-8-22	SESE	07	080S	220E	4304733816	14864	Federal	GW	P
WVFU 16W-7-8-22	WV 16W-7-8-22	SESE	07	080S	220E	4304733817	14864	Federal	GW	P
WVFU 6W-7-8-22	WV 6W-7-8-22	SENE	07	080S	220E	4304733828	14864	Federal	GW	P
WVFU 6W-18-8-22	WV 6W-18-8-22	SENE	18	080S	220E	4304733842	14864	Federal	GW	P
WVFU 6WC-18-8-22	WV 6WC-18-8-22	SENE	18	080S	220E	4304733843	14864	Federal	GW	P
WVFU 6WD-18-8-22	WV 6WD-18-8-22	SENE	18	080S	220E	4304733844	14864	Federal	GW	P
WVFU 5W-23-8-21	WV 5W-23-8-21	SWNW	23	080S	210E	4304733860	14864	Federal	GW	P
WVFU 7W-23-8-21	WV 7W-23-8-21	SWNE	23	080S	210E	4304733861	14864	Federal	GW	P
WVFU 8W-12-8-21	WV 8W-12-8-21	SENE	12	080S	210E	4304733862	14864	Federal	GW	P
WVFU 10W-12-8-21	WV 10W-12-8-21	NWSE	12	080S	210E	4304733863	14864	Federal	GW	P
WVFU 14W-12-8-21	WV 14W-12-8-21	SESE	12	080S	210E	4304733864	14864	Federal	GW	P
WVFU 16W-12-8-21	WV 16W-12-8-21	SESE	12	080S	210E	4304733865	14864	Federal	GW	P
WVFU 1W-15-8-21	WV 1W-15-8-21	NENE	15	080S	210E	4304733902	14864	Federal	GW	S
WVFU 1W-22-8-21	WV 1W-22-8-21	NENE	22	080S	210E	4304733903	14864	Federal	GW	P
WVFU 1W-23-8-21	WV 1W-23-8-21	NENE	23	080S	210E	4304733904	14864	Federal	GW	P
WV 6W-11-8-21	WV 6W-11-8-21	SENE	11	080S	210E	4304733906	14864	Federal	GW	P
WVFU 7W-24-8-21	WV 7W-24-8-21	SWNE	24	080S	210E	4304733908	14864	Federal	GW	P
WV 10W-11-8-21	WV 10W-11-8-21	NWSE	11	080S	210E	4304733910	14864	Federal	GW	P
WVFU 11W-15-8-21	WV 11W-15-8-21	NESW	15	080S	210E	4304733911	14864	Federal	GW	P
WV 13W-11-8-21	WV 13W-11-8-21	SWSW	11	080S	210E	4304733913	14864	Federal	GW	S
WVFU 13W-15-8-21	WV 13W-15-8-21	SWSW	15	080S	210E	4304733914	14864	Federal	GW	P
WV 15W-10-8-21	WV 15W-10-8-21	SWSE	10	080S	210E	4304733916	14864	Federal	GW	P

QEP Uinta Basin (N2460) to QUESTAR E and P (N5085)
WONSITS VALLEY UNIT

4/30/2007 and 5/15/2007

Original Well Name	Well Name & No.	Q/Q	SEC	TWP	RNG	API	Entity	Lease	Well Type	Status
WVFU 15W-15-8-21	WV 15W-15-8-21	SWSE	15	080S	210E	4304733917	14864	Federal	GW	P
WVFU 5W-14-8-21	WV 5W-14-8-21	SWNW	14	080S	210E	4304733953	14864	Federal	GW	P
WVFU 7W-14-8-21	WV 7W-14-8-21	SWNE	14	080S	210E	4304733955	14864	Federal	GW	P
WV 8W-11-8-21	WV 8W-11-8-21	SENE	11	080S	210E	4304733957	14864	Federal	GW	S
WVFU 8W-14-8-21	WV 8W-14-8-21	SENE	14	080S	210E	4304733958	14864	Federal	GW	P
WVFU 9W-15-8-21	WV 9W-15-8-21	NESE	15	080S	210E	4304733959	14864	Federal	GW	P
WVFU 12W-13-8-21	WV 12W-13-8-21	NWSW	13	080S	210E	4304733961	14864	Federal	GW	P
WVFU 14W-13-8-21	WV 14W-13-8-21	SESW	13	080S	210E	4304733962	14864	Federal	GW	P
WVFU 15W-14-8-21	WV 15W-14-8-21	SWSE	14	080S	210E	4304733963	14864	Federal	GW	P
WVFU 2W-18-8-22	WV 2W-18-8-22	NWNE	18	080S	220E	4304733986	14864	Federal	GW	P
WV 8W-18-8-22	WV 8W-18-8-22	SENE	18	080S	220E	4304733989	14864	Federal	GW	P
WVFU 10W-18-8-22	WV 10W-18-8-22	NWSE	18	080S	220E	4304733991	14864	Federal	GW	P
WVFU 12W-18-8-22	WV 12W-18-8-22	NWSW	18	080S	220E	4304733993	14864	Federal	GW	P
WV 14W-18-8-22	WV 14W-18-8-22	SESW	18	080S	220E	4304733995	14864	Federal	GW	P
WVFU 8W-1-8-21	WV 8W-1-8-21	SENE	01	080S	210E	4304734009	14864	Federal	GW	DRL
WV 4W-17-8-22	WV 4W-17-8-22	NWNW	17	080S	220E	4304734038	14864	Federal	GW	P
WV 12G-1-8-21	WV 12G-1-8-21	NWSW	01	080S	210E	4304734108	5265	Federal	OW	TA
WV 2W-14-8-21	WV 2W-14-8-21	NWNE	14	080S	210E	4304734140	14864	Federal	GW	P
GH 2W-21-8-21	GH 2W-21-8-21	NWNE	21	080S	210E	4304734141	14864	Federal	GW	P
WV 2W-23-8-21	WV 2W-23-8-21	NWNE	23	080S	210E	4304734142	14864	Federal	GW	P
GH 3W-21-8-21	WV 3W-21-8-21	NENW	21	080S	210E	4304734143	14864	Federal	GW	P
WV 4W-13-8-21	WV 4W-13-8-21	NWNW	13	080S	210E	4304734144	14864	Federal	GW	P
GH 4W-21-8-21	WV 4W-21-8-21	NWNW	21	080S	210E	4304734145	14864	Federal	GW	P
WV 4W-22-8-21	WV 4W-22-8-21	NWNW	22	080S	210E	4304734146	14864	Federal	GW	P
WV 16W-11-8-21	WV 16W-11-8-21	SESE	11	080S	210E	4304734155	14864	Federal	GW	TA
WV 3W-19-8-22	WV 3W-19-8-22	NENW	19	080S	220E	4304734187	14864	Federal	GW	P
WV 4W-23-8-21	WV 4W-23-8-21	NWNW	23	080S	210E	4304734188	14864	Federal	GW	P
WV 6W-23-8-21	WV 6W-23-8-21	SENE	23	080S	210E	4304734189	14864	Federal	GW	P
WV 2W-15-8-21	WV 2W-15-8-21	NWNE	15	080S	210E	4304734242	14864	Federal	GW	P
WV 2W-22-8-21	WV 2W-22-8-21	NWNE	22	080S	210E	4304734243	14864	Federal	GW	P
WV 4W-14-8-21	WV 4W-14-8-21	NWNW	14	080S	210E	4304734244	14864	Federal	GW	P
WV 6W-12-8-21	WV 6W-12-8-21	SENE	12	080S	210E	4304734245	5265	Federal	GW	S
WV 7W-15-8-21	WV 7W-15-8-21	SWNE	15	080S	210E	4304734246	14864	Federal	GW	P
WV 8W-15-8-21	WV 8W-15-8-21	SENE	15	080S	210E	4304734247	14864	Federal	GW	P
WV 12W-12-8-21	WV 12W-12-8-21	NWSW	12	080S	210E	4304734248	14864	Federal	GW	S
WV 14W-15-8-21	WV 14W-15-8-21	SESW	15	080S	210E	4304734249	14864	Federal	GW	P
WV 16W-10-8-21	WV 16W-10-8-21	SESE	10	080S	210E	4304734250	14864	Federal	GW	P
WV 16W-15-8-21	WV 16W-15-8-21	SESE	15	080S	210E	4304734251	14864	Federal	GW	P
WV 2W-12-8-21	WV 2W-12-8-21	NWNE	12	080S	210E	4304734265	14864	Federal	GW	OPS
WV 3W-12-8-21	WV 3W-12-8-21	NENW	12	080S	210E	4304734267	14864	Federal	GW	OPS
WV 4W-12-8-21	WV 4D-12-8-21	NWNW	12	080S	210E	4304734268	12436	Federal	GW	DRL

QEP Uinta Basin (N2460) to QUESTAR E and P (N5085)
WONSITS VALLEY UNIT

4/30/2007 and 5/15/2007

Original Well Name	Well Name & No.	Q/Q	SEC	TWP	RNG	API	Entity	Lease	Well Type	Status
WV 5W-12-8-21	WV 5W-12-8-21	SWNW	12	080S	210E	4304734270	14864	Federal	GW	OPS
WV 6W-14-8-21	WV 6W-14-8-21	SENW	14	080S	210E	4304734271	14864	Federal	GW	P
WV 9W-11-8-21	WV 9W-11-8-21	NESE	11	080S	210E	4304734274	14864	Federal	GW	DRL
WV 10W-14-8-21	WV 10W-14-8-21	NWSE	14	080S	210E	4304734275	14864	Federal	GW	S
WV 11W-14-8-21	WV 11W-14-8-21	NESW	14	080S	210E	4304734277	14864	Federal	GW	P
WV 12W-14-8-21	WV 12W-14-8-21	NWSW	14	080S	210E	4304734279	14864	Federal	GW	S
WV 14M-11-8-21	WV 14M-11-8-21	SESW	11	080S	210E	4304734280	14864	Federal	GW	P
WV 14W-14-8-21	WV 14W-14-8-21	SESW	14	080S	210E	4304734281	14864	Federal	GW	P
WV 16W-14-8-21	WV 16G-14-8-21	SESE	14	080S	210E	4304734283	5265	Federal	OW	S
WV 3MU-15-8-21	WV 3MU-15-8-21	NENW	15	080S	210E	4304734289	14864	Federal	GW	P
WV 4MU-15-8-21	WV 4MU-15-8-21	NWNW	15	080S	210E	4304734291	14864	Federal	GW	P
WV 5MU-15-8-21	WV 5MU-15-8-21	SWNW	15	080S	210E	4304734293	14864	Federal	GW	P
WV 6W-15-8-21	WV 6W-15-8-21	SENW	15	080S	210E	4304734294	14864	Federal	GW	P
WV 10W-15-8-21	WV 10W-15-8-21	NWSE	15	080S	210E	4304734295	14864	Federal	GW	P
WVU 4W-24-8-21	WV 4W-24-8-21	NWNW	24	080S	210E	4304734330	14864	Federal	GW	P
WV 8M-23-8-21	WV 8M-23-8-21	SENE	23	080S	210E	4304734339	14864	Federal	GW	P
WVU 8W-24-8-21	WV 8W-24-8-21	SENE	24	080S	210E	4304734340	14864	Federal	GW	P
WV 2W-8-8-22	WV 2W-8-8-22	NWNE	08	080S	220E	4304734468	14864	Federal	GW	P
WV 8W-7-8-22	WV 8W-7-8-22	SENE	07	080S	220E	4304734469	14864	Federal	GW	S
WV 8W-22-8-21	WV 8W-22-8-21	SENE	22	080S	210E	4304734564	14864	Federal	GW	P
WV 3G-8-8-22	WV 3G-8-8-22	NENW	08	080S	220E	4304734596	5265	Federal	OW	TA
WV 14MU-10-8-21	WV 14MU-10-8-21	SESW	10	080S	210E	4304735879	14864	Federal	GW	P
WV 13MU-10-8-21	WV 13MU-10-8-21	SWSW	10	080S	210E	4304736305	14864	Federal	GW	P
WV 3DML-13-8-21	WV 3D-13-8-21	SENW	13	080S	210E	4304737923	14864	Federal	GW	DRL
WV 14DML-12-8-21	WV 14DML-12-8-21	SESW	12	080S	210E	4304737924	14864	Federal	GW	DRL
WV 15AML-12-8-21	WV 15AML-12-8-21	NWSE	12	080S	210E	4304737925		Federal	GW	APD
WV 13DML-10-8-21	WV 13DML-10-8-21	SWSW	10	080S	210E	4304737926	14864	Federal	GW	P
WV 4DML-15-8-21	WV 4DML-15-8-21	NWNW	15	080S	210E	4304737927	14864	Federal	GW	DRL
WV 13AD-8-8-22	WV 13AD-8-8-22	SWSW	08	080S	220E	4304737945		Federal	GW	APD
WV 11AML-14-8-21	WV 11AD-14-8-21	NWSE	14	080S	210E	4304738049	15899	Federal	GW	APD
WV 11DML-14-8-21	WV 11DML-14-8-21	SESW	14	080S	210E	4304738050		Federal	GW	APD
WV 4AML-19-8-22	WV 4AML-19-8-22	NWNW	19	080S	220E	4304738051		Federal	GW	APD
WV 13CML-8-8-22	WV 13CML-8-8-22	SWSW	08	080S	220E	4304738431		Federal	GW	APD
WV 13BML-18-8-22	WV 13BML-18-8-22	SWSW	18	080S	220E	4304738432		Federal	GW	APD
WV 8BML-18-8-22	WV 8BML-18-8-22	E/NE	18	080S	220E	4304738433		Federal	GW	APD
WV 6ML-24-8-21	WV 6-24-8-21	SENW	24	080S	210E	4304738663		Federal	GW	APD
WV 2ML-24-8-21	WV 2ML-24-8-21	NWNE	24	080S	210E	4304738664		Federal	GW	APD
WV 1DML-13-8-21	WV 1DML-13-8-21	NENE	13	080S	210E	4304738733		Federal	GW	APD
WV 4DML-13-8-21	WV 4DML-13-8-21	NWNW	13	080S	210E	4304738734		Federal	GW	APD
WV 3AML-14-8-21	WV 3AML-14-8-21	NENW	14	080S	210E	4304738736		Federal	GW	APD
WV 16CML-14-8-21	WV 16C-14-8-21	SESE	14	080S	210E	4304738737		Federal	GW	APD

QEP Uinta Basin (N2460) to QUESTAR E and P (N5085)
WONSITS VALLEY UNIT

4/30/2007 and 5/15/2007

Original Well Name	Well Name & No.	Q/Q	SEC	TWP	RNG	API	Entity	Lease	Well Type	Status
WVU 21	WV 21	NENE	16	080S	210E	4304715452	99990	State	WI	A
WVU 32	WV 32	NENW	16	080S	210E	4304716513	5265	State	OW	P
WVU 72	WV 72	SWSW	16	080S	210E	4304720058	99990	State	WI	A
WVU 73	WV 73	NESE	16	080S	210E	4304720066	5265	State	WI	A
WVU 74	WV 74	SWSE	16	080S	210E	4304720078	5265	State	OW	P
WVU 75	WV 75	SWNE	16	080S	210E	4304720085	5265	State	OW	P
WVU 78	WV 78	NESW	16	080S	210E	4304720115	99990	State	WI	A
WVU 134	WV 134	SESE	16	080S	210E	4304731118	5265	State	OW	P
WVU 141	WV 141	NWSE	16	080S	210E	4304731609	5265	State	OW	P
WVU 127	WV 127	SENE	16	080S	210E	4304731611	5265	State	OW	P
WVU 142	WV 142	SESW	16	080S	210E	4304731612	5265	State	OW	P
WVUFU 9W-13-8-21	WV 9W-13-8-21	NESE	13	080S	210E	4304733223	14864	State	GW	S
WVUFU 2W-16-8-21	WV 2W-16-8-21	NWNE	16	080S	210E	4304733246	14864	State	GW	P
WVUFU 2G-16-8-21	WV 2G-16-8-21	NWNE	16	080S	210E	4304733247	5265	State	OW	P
WVUFU 6W-16-8-21	WV 6W-16-8-21	SENW	16	080S	210E	4304733527	14864	State	GW	P
WVUFU 6G-16-8-21	WV 6G-16-8-21	SENW	16	080S	210E	4304733564	5265	State	OW	P
WVUFU 16W-2-8-21	WV 16W-2-8-21	SESE	02	080S	210E	4304733645	5265	State	OW	S
WVUFU 9W-2-8-21	WV 9W-2-8-21	NESE	02	080S	210E	4304733648	14864	State	GW	P
WVUFU 12W-16-8-21	WV 12W-16-8-21	NWSW	16	080S	210E	4304733649	14864	State	GW	P
WVUFU 12G-16-8-21	WV 12G-16-8-21	NWSW	16	080S	210E	4304733650	5265	State	OW	P
WVUFU 16W-13-8-21	WV 16W-13-8-21	SESE	13	080S	210E	4304733796	14864	State	GW	P
WV 10G-2-8-21	WV 10G-2-8-21	NWSE	02	080S	210E	4304734035	5265	State	OW	P
WV 14G-2-8-21	WV 14G-2-8-21	SESW	02	080S	210E	4304734036	5265	State	OW	P
WV 13G-2-8-21	WV 13G-2-8-21	SWSW	02	080S	210E	4304734068	5265	State	OW	P
WV 5G-16-8-21	WV 5G-16-8-21	SWNW	16	080S	210E	4304734107	5265	State	OW	P
WV 11W-16-8-21	WV 11W-16-8-21	NESW	16	080S	210E	4304734190	14864	State	GW	P
WV 13W-16-8-21	WV 13W-16-8-21	SWSW	16	080S	210E	4304734191	14864	State	GW	P
WV 14W-16-8-21	WV 14W-16-8-21	SESW	16	080S	210E	4304734192	14864	State	GW	P
WV 15W-16-8-21	WV 15W-16-8-21	SWSE	16	080S	210E	4304734224	14864	State	GW	P
WV 16W-16-8-21	WV 16W-16-8-21	SESE	16	080S	210E	4304734225	14864	State	GW	P
WV 1MU-16-8-21	WV 1MU-16-8-21	NENE	16	080S	210E	4304734288	14864	State	GW	P
WV 3W-16-8-21	WV 3W-16-8-21	NENW	16	080S	210E	4304734290		State	GW	LA
WV 4W-16-8-21	WV 4W-16-8-21	NWNW	16	080S	210E	4304734292	12436	State	D	PA
WVU 5W-16-8-21	WV 5W-16-8-21	SWNW	16	080S	210E	4304734321	14864	State	GW	P
WV 7W-16-8-21	WV 7W-16-8-21	SWNE	16	080S	210E	4304734322	14864	State	GW	P
WV 8ML-16-8-21	WV 8ML-16-8-21	SENE	16	080S	210E	4304734323	14864	State	GW	P
WV 9W-16-8-21	WV 9W-16-8-21	NESE	16	080S	210E	4304734325	14864	State	GW	P
WV 10W-16-8-21	WV 10W-16-8-21	NWSE	16	080S	210E	4304734326	14864	State	GW	P
WV 12BML-16-8-21	WV 12BML-16-8-21	SWNW	16	080S	210E	4304737824	14864	State	GW	P
WV 12DML-16-8-21	WV 12D-16-8-21	NWSW	16	080S	210E	4304737870		State	GW	APD
WV 15CML-16-8-21	WV 15CML-16-8-21	SESW	16	080S	210E	4304737871	14864	State	GW	P

QEP Uinta Basin (N2460) to QUESTAR E and P (N5085)
WONSITS VALLEY UNIT

4/30/2007 and 5/15/2007

Original Well Name	Well Name & No.	Q/Q	SEC	TWP	RNG	API	Entity	Lease	Well Type	Status
WV 15DML-16-8-21	WV 15DML-16-8-21	SWSE	16	080S	210E	4304737872		State	GW	APD
WV 16DML-13-8-21	WV 16DML-13-8-21	SESE	13	080S	210E	4304738735		State	GW	APD

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: see attached
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: see attached
		7. UNIT or CA AGREEMENT NAME: see attached
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____	8. WELL NAME and NUMBER: see attached	
2. NAME OF OPERATOR: QUESTAR EXPLORATION AND PRODUCTION COMPANY		9. API NUMBER: attached
3. ADDRESS OF OPERATOR: 1050 17th Street Suite 500 CITY Denver STATE CO ZIP 80265	PHONE NUMBER: (303) 308-3068	10. FIELD AND POOL, OR WILDCAT:

4. LOCATION OF WELL

FOOTAGES AT SURFACE: attached COUNTY: Uintah


QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: <u>1/1/2007</u>	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Operator Name Change</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	


12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Effective January 1, 2007 operator of record, QEP Uinta Basin, Inc., will hereafter be known as QUESTAR EXPLORATION AND PRODUCTION COMPANY. This name change involves only an internal corporate name change and no third party change of operator is involved. The same employees will continue to be responsible for operations of the properties described on the attached list. All operations will continue to be covered by bond numbers:
Federal Bond Number: 965002976 (BLM Reference No. ESB000024)
Utah State Bond Number: 965003033
Fee Land Bond Number: 965003033
Current operator of record, QEP UINTA BASIN, INC., hereby resigns as operator of the properties as described on the attached list.


 Jay B. Neese, Executive Vice President, QEP Uinta Basin, Inc.

Successor operator of record, QUESTAR EXPLORATION AND PRODUCTION COMPANY, hereby assumes all rights, duties and obligations as operator of the properties as described on the attached list


 Jay B. Neese, Executive Vice President
 Questar Exploration and Production Company

NAME (PLEASE PRINT) <u>Debra K. Stanberry</u>	TITLE <u>Supervisor, Regulatory Affairs</u>
SIGNATURE 	DATE <u>3/16/2007</u>

(This space for State use only)

RECEIVED
APR 19 2007

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: see attached
2. NAME OF OPERATOR: QUESTAR EXPLORATION AND PRODUCTION COMPANY		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: see attached
3. ADDRESS OF OPERATOR: 1050 17th Street Suite 500 <small>CITY</small> Denver <small>STATE</small> CO <small>ZIP</small> 80265		7. UNIT or CA AGREEMENT NAME: see attached
4. LOCATION OF WELL FOOTAGES AT SURFACE: attached		8. WELL NAME and NUMBER: see attached
PHONE NUMBER: (303) 308-3068		9. API NUMBER: attached
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		10. FIELD AND POOL, OR WILDCAT:

COUNTY: Uintah

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: <u>1/1/2007</u>	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Well Name Changes</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

PER THE ATTACHED LIST OF WELLS, QUESTAR EXPLORATION AND PRODUCTION COMPANY REQUESTS THAT THE INDIVIDUAL WELL NAMES BE UPDATED IN YOUR RECORDS.

NAME (PLEASE PRINT) <u>Debra K. Stappberry</u>	TITLE <u>Supervisor, Regulatory Affairs</u>
SIGNATURE	DATE <u>4/17/2007</u>

(This space for State use only)

RECEIVED

APR 19 2007

DIV. OF OIL, GAS & MINING



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155



IN REPLY REFER TO
3180
UT-922

April 23, 2007

Questar Exploration and Production Company
1050 17th Street, Suite 500
Denver, Colorado 80265

Re: Wonsits Valley Unit
Uintah County, Utah

Gentlemen:

On April 12, 2007, we received an indenture dated April 6, 2007, whereby QEP Uinta Basin, Inc. resigned as Unit Operator and Questar Exploration and Production Company was designated as Successor Unit Operator for the Wonsits Valley Unit, Uintah County, Utah.

This indenture was executed by all required parties and the signatory parties have complied with Sections 5 and 6 of the unit agreement. The instrument is hereby approved effective April 23, 2007. In approving this designation, the Authorized Officer neither warrants nor certifies that the designated party has obtained all required approval that would entitle it to conduct operations under the Wonsits Valley Unit Agreement.

Your nationwide oil and gas bond No. ESB000024 will be used to cover all federal operations within the Wonsits Valley Unit.

It is requested that you notify all interested parties of the change in unit operator. Copies of the approved instruments are being distributed to the appropriate federal offices, with one copy returned herewith.

Sincerely,

/s/ Greg J. Noble

Greg J. Noble
Acting Chief, Branch of Fluid Minerals

Enclosure

bcc: Field Manager - Vernal (w/enclosure)
SITLA
Division of Oil, Gas & Mining
File - Wonsits Valley Unit (w/enclosure)
Agr. Sec. Chron
Reading File
Central Files

UT922:TAThompson:tt:4/23/07

RECEIVED

APR 30 2007

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

CONFIDENTIAL

5. Well Serial No.
WV 13AML-8-8-22
6. If Indian, Allowance or Tribe Name
N/A

SUBMIT IN TRIPLICATE - Other Instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
QEP UINTA BASIN, INC. Contact: *Jim Davidson*

3a. Address **1571 East 1700 South, Vernal, UT 84078**
3b. Phone No. (include area code) **303-308-3090**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
1285' FSL 1252' FWL SWSW SECTION 8, T8S, R22E

7. If Unit or CA/Agreement, Name and/or No.
WONSITS VALLEY UNIT

WONSITS VALLEY UNIT

WV 13AML-8-8-22

9. API Well No.
43-047-37945

10. Field and Pool, or Exploratory Area
WONSITS VALLEY

11. County or Parish, State
Uintah

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other TD CHANGE & NAME CHANGE

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once Testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

QEP Uinta Basin, Inc. proposes to drill this well to the Dakota formation. The proposed TD was 11,600', the new proposed TD will be 16,700'. Please refer to revised 8-point drilling plan, cement and BOP.

3-21-07 RM

Qep Uinta Basin, Inc. proposes to change the well name from WV 13AML-8-8-22 to **Approved by the Utah Division of Oil, Gas and Mining**

Federal Approval of this Action is Necessary

Date: *03-20-07*

By: *[Signature]*

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) Jan Nelson	Title Regulatory Affairs
Signature <i>Jan Nelson</i>	Date March 16, 2007

THIS SPACE FOR FEDERAL OR STATE USE

Approved by _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED

MAR 19 2007

CONFIDENTIAL

DRILLING PROGRAM

ONSHORE OIL & GAS ORDER NO. 1
Approval of Operations on Onshore
Federal Oil and Gas Leases

All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas No. 1, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

1. **Formation Tops**

The estimated tops of important geologic markers are as follows:

<u>Formation</u>	<u>Depth</u>
Uinta	Surface
Green River	2,970'
Wasatch	6,290'
Mesaverde	9,185'
Sego	11,395'
Castlegate	11,615'
Blackhawk	11,946'
Mancos Shale	12,385'
Mancos B	12,836'
Frontier	15,510'
Dakota Silt	16,383'
Dakota	16,372'
Morrison	16,615'
TD	16,700'

2. **Anticipated Depths of Oil Gas Water and Other Mineral Bearing Zones**

The estimated depths at which the top and bottom of the anticipated water, oil, gas. Or other mineral bearing formations are expected to be encountered are as follows:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
Gas	Wasatch	6,290'
Gas	Mesaverde	9,185'
Gas	Blackhawk	11,946'
Gas	Mancos Shale	12,385'
Gas	Mancos B	12,836'
Gas	Dakota	16,700'

DRILLING PROGRAM

All fresh water and prospectively valuable minerals encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

All water shows and water-bearing sands will be reported to the BLM in Vernal, Utah. Copies of State of Utah form OGC-8-X are acceptable. If flows are detected, samples will be submitted to the BLM along with any water analyses conducted. Fresh water will be obtained from Wonsits Valley water right # A36125 (which was filed on May 7, 1964,) or Red Wash water right # 49-2153 (which was filed on March 25, 1960). It was determined by the Fish and Wildlife Service that any water right number filed before 1989 is not depleting to the Upper Colorado River System, to supply fresh water for drilling purposes. All water resulting from drilling operations will be disposed of at Red Wash Central Battery Disposal Site; SWSE, Section 27, T7S, R23E or Wonsits Valley Disposal Site; SWNW, Section 12, T8S, R21E.

3. **Operator's Specification for Pressure Control Equipment:**

- A. 11" or 13-5/8" 10,000 psi double gate, 10,000 psi single gate, 10,000 psi annular BOP (schematic included) from 9-5/8" casing point to total depth. The choice of BOP stacks is based on the drilling contractor's availability.
- B. Functional test daily
- C. All casing strings shall be pressure tested (0.2 psi/foot or 1500 psi, whichever is greater) prior to drilling the plug after cementing; test pressure shall not exceed the internal yield pressure of the casing.
- D. Ram type preventers and associated equipment shall be tested to the approved stack working pressure if isolated by test plug or to 50 percent of internal yield pressure of casing whichever is less. BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc..., for a 10M system and individual components shall be operable as designed.

DRILLING PROGRAM

4. **Casing Design:**

Hole Size	Csg. Size	Top (MD)	Bottom (MD)	Wt.	Grade	Thread	Cond.
26"	20"	Sfc	40-60'	Steel	Cond.	None	Used
14-3/4"	10-3/4"	Sfc	700'	40.5	J-55	LTC	New
8-3/4"	7"	Sfc	9000'	26	HCP-110	LTC	New
8-3/4"	7"	9000'	11,500'	29* SDrift	HCP-110	LTC	New
6-1/8"	4-1/2"	sfc	13,700'	15.1	P-110	LTC	New
6-1/8"	4-1/2"	13,700'	16,700'	15.1	Q-125	LTC	New

Casing Strengths:				Collapse	Burst	Tensile (minimum)
40.5"	40.5 lb.	J-55	STC	1,580 psi	3,130 psi	420,000 lb.
7"	26 lb.	HCP-110	LTC	7,800 psi	9,950 psi	693,000 lb.
7"	29 lb.*	HCP-110	LTC	9,200 psi	11,220 psi	797,000 lb.
4-1/2"	15.1 lb.	P-110	LTC	14,350 psi	14,420 psi	406,000 lb.
4-1/2"	15.1 lb.	Q-125	LTC	15,840 psi	16,380 psi	438,000 lb.

* **Special Drift**

MINIMUM DESIGN FACTORS:

COLLAPSE: 1.125
 BURST: 1.10
 TENSION: 1.80

Area Fracture Gradient: 0.9 psi/foot
 Maximum anticipated mud weight: 15.4 ppg
 Maximum surface treating pressure: 12,500 psi

DRILLING PROGRAM

5. **Auxiliary Equipment**

- A. Kelly Cock – yes
- B. Float at the bit – no
- C. Monitoring equipment on the mud system – visually and/or PVT/Flow Show
- D. Full opening safety valve on the rig floor – yes
- E. Rotating Head – yes
If drilling with air the following will be used:
- F. The blooie line shall be at least 6” in diameter and extend at least 100’ from the well bore into the reserve/blooie pit.
- G. Blooie line ignition shall be provided by a continuous pilot (ignited when drilling below 500’).
- H. Compressor shall be tied directly to the blooie line through a manifold.
- I. A mister with a continuous stream of water shall be installed near the end of the blooie lines for dust suppression.

Surface hole will be drilled with air, air/mist, foam, or mud depending on hole conditions. Drilling below surface casing will be with water based drilling fluids consisting primarily of fresh water, bentonite, lignite, caustic, lime, soda ash and polymers. No chromates will be used. It is not intended to use oil in the mud, however, in the event it is used, oil concentration will be less than 4% by volume. Maximum anticipated mud weight is 15.4 ppg.

No minimum quantity of weight material will be required to be kept on location.

PVT/Flow Show will be used from base of surface casing to TD.

Gas detector will be used from surface casing depth to TD.

6. **Testing, logging and coring program**

- A. Cores – none anticipated
- B. DST – none anticipated
- C. Logging – Mud logging – 4500’ to TD
GR-SP-Induction, Neutron Density, FMI

DRILLING PROGRAM

- D. Formation and Completion Interval: Mancos interval, final determination of completion will be made by analysis of logs.
Stimulation – Stimulation will be designed for the particular area of interest as encountered.

7. Cementing Program

20" Conductor:

Cement to surface with construction cement.

10-3/4" Surface Casing: sfc – 700' (MD)

Slurry: 0' – 700'. 365 sxs (430 cu ft) Premium cement + 0.25 lbs/sk Flocele + 2% CaCl₂
Slurry wt: 15.6 ppg, slurry yield: 1.20 ft³/sx, slurry volume: 12/1/4" hole + 100% excess.

7" Intermediate Casing: sfc - 11,500' (MD)

Foamed Lead Slurry 2: 6,000' – 11,000'. 762 sks (1127 cu ft) 50/50 Poz Premium + 5 lb/sk silicalite compacted light weight additive + 20% SSA-1 additive + 0.3% FDP-C766-05 fluid loss + 0.2% Versaset thixotropic additive + 1.5% Zonesealant 2000 foamer.
Slurry wt: 14.3 ppg, foamed 11.5 ppg, Slurry yield: 1.48 ft³/sk, Slurry yield foamed: 1.96 ft³/sk, Slurry volume: 8-3/4" hole + 50% excess.

Tail Slurry: 11,000' – 11,500'. 76 sks (113 cu ft) of 50/50 Poz Premium + 5 lb/sk silicalite compacted light weight additive + 20% SSA-1 additive + 0.3% FDP-C766-05 fluid loss + 0.2% Versaset thixotropic additive. Slurry wt: 14.3 ppg, Slurry yield: 1.48 ft³/sk, Slurry volume: 8-3/4" hole + 50% excess.

4-1/2" Production Casing: sfc - 16,700' (MD)

Lead/Tail Slurry: 6,000 - 16,700'. 768 sks (1259 cu ft) Premium Cement + 0.5% HR-12 retarder + 35% SSA-1 + 0.2% Suspend HT + 0.4% Halad(R)-344 fluid loss + 0.3% Halad(R)-413 fluid loss + 0.4% Super CBL gas migration + 0.2% HR-25 retarder. Slurry wt: 15.25 ppg, Slurry yield: 1.64 ft³/sk, Slurry volume: 6-1/8" hole + 25% in open hole section.

*Final cement volumes to be calculated from caliper log with an attempt to be made to circulate cement to the surface on the intermediate string and 5,000' on the production string. A bond log will be run across the zone of interest and across zones as required by the authorized officer to insure protection of natural resources.

DRILLING PROGRAM

8. **Anticipated Abnormal Pressures and Temperatures, Other Potential Hazards**


No abnormal temperatures or pressures are anticipated. No H₂S has been encountered in or known to exist from previous wells drilled to similar depths in the general area. Maximum anticipated bottom hole pressure equals approximately 10,420 psi. Maximum anticipated bottom hole temperature is 320° F.

DRILLING PROGRAM


Purpose:

Either an 11" 10,000 psi stack or an 13-5/8" 10,000 psi stack will be used for well control in the slim hole environment.

BOP Requirements:

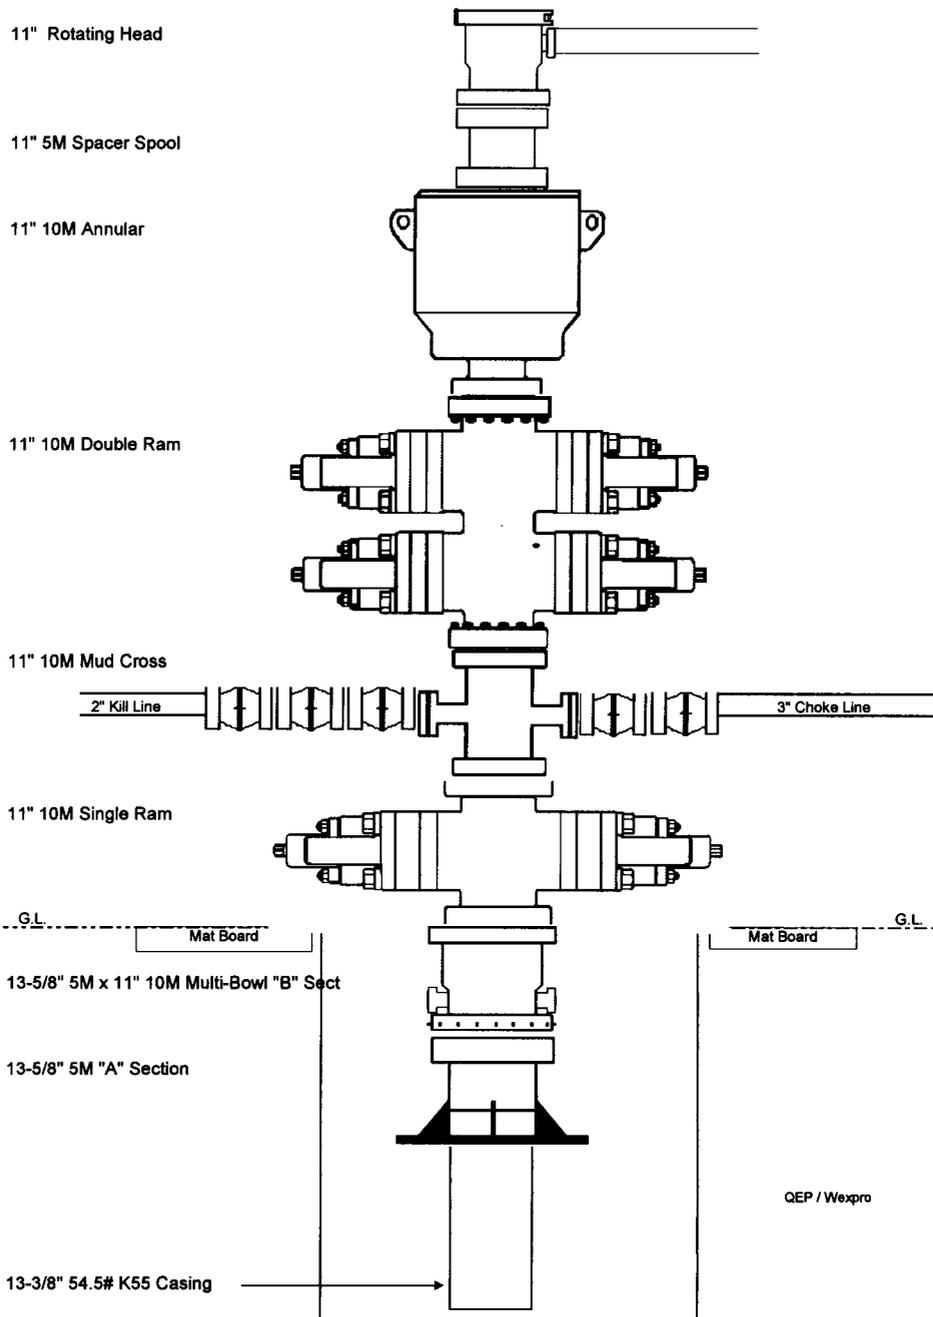

Attachment I. Diagrams of Choke Manifold Equipment

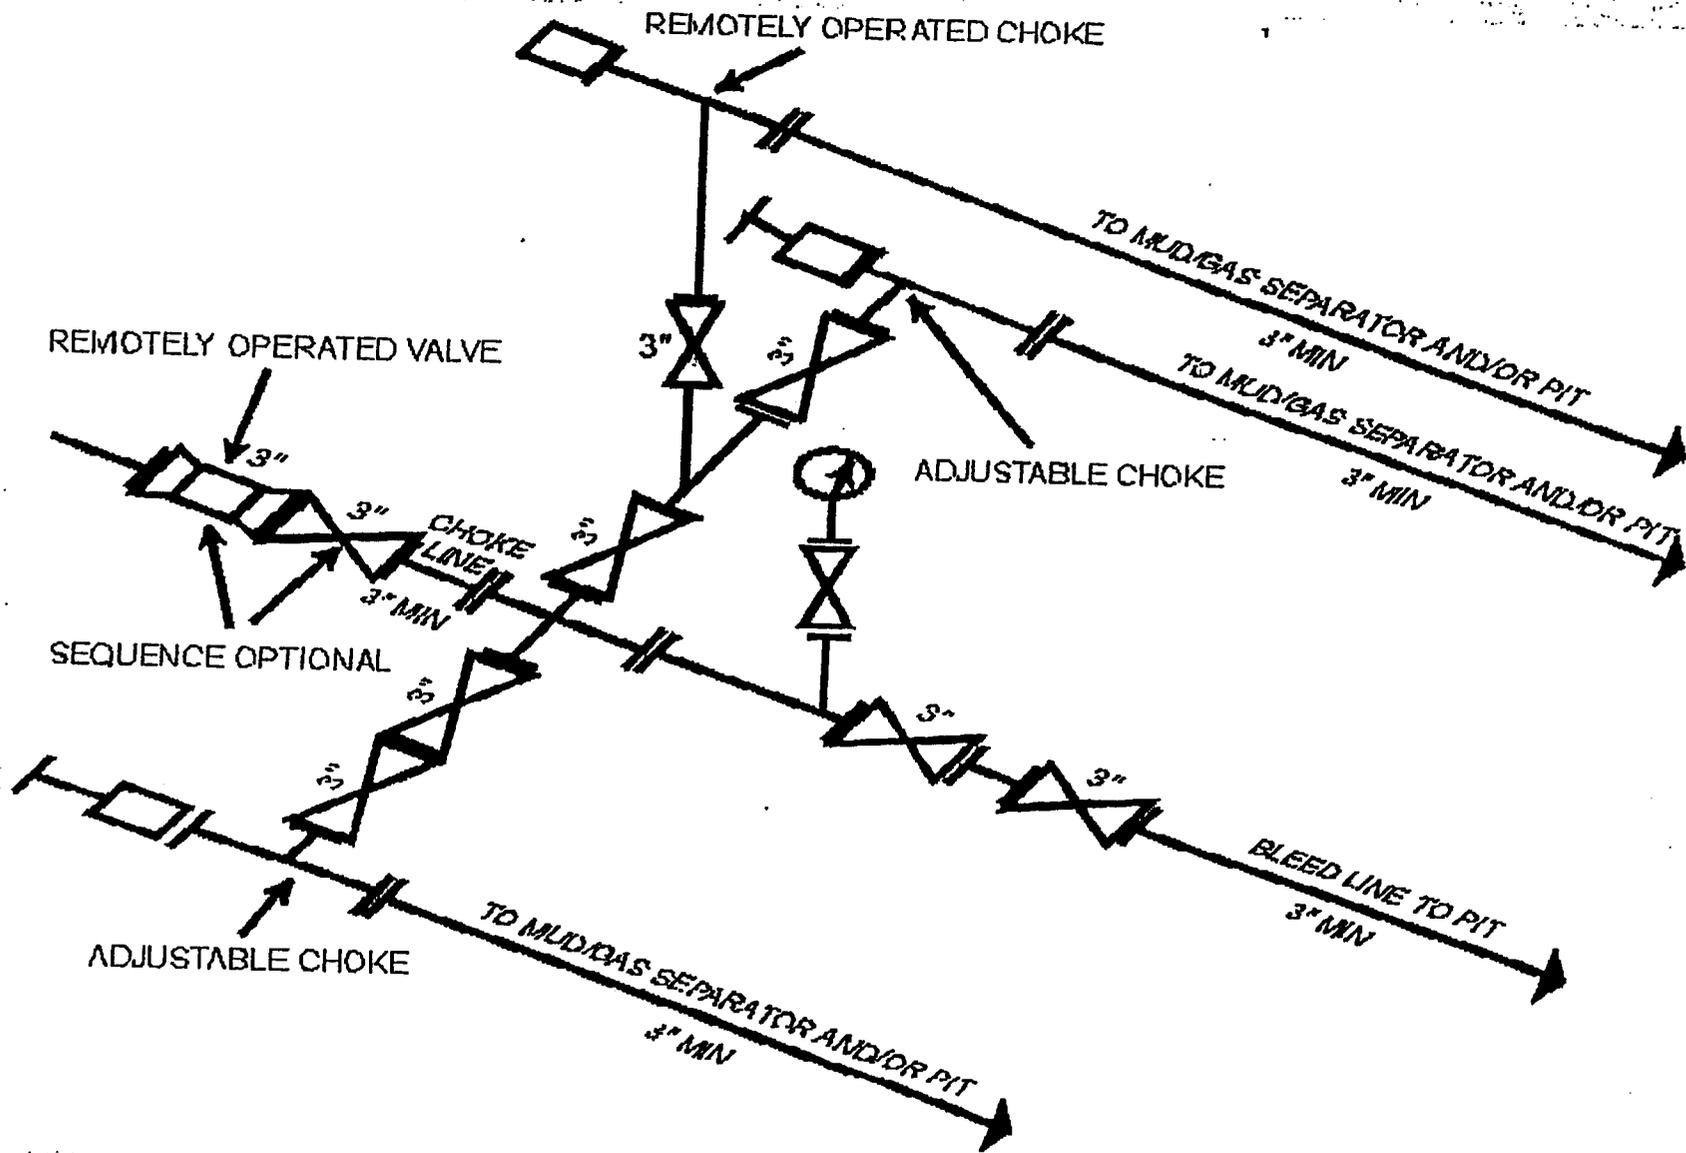

I-4-10M and 15M Choke Manifold Equipment -- Configuration of chokes may vary

[54 FR 39528, Sept. 27, 1989]

Last Updated March 2, 1997 by John Broderick

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-22158
2. NAME OF OPERATOR: QEP UINTA BASIN, INC		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A
3. ADDRESS OF OPERATOR: 1571 E. 1700 S. CITY VERNAL STATE UT ZIP 84078		7. UNIT or CA AGREEMENT NAME: WONSITS VALLEY UNIT
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1285' FSL 1252' FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWSW 8 8S 22E		8. WELL NAME and NUMBER: WV 13AD-8-8-22
PHONE NUMBER: (435) 781-4031		9. API NUMBER: 4304737645
COUNTY: UINTAH		10. FIELD AND POOL, OR WLD CAT: WONSITS, VALLEY
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>APD EXTENSION</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
QEP Uinta Basin, Inc. hereby requests a 1 year extension on the WV 13AD-8-8-22.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 04-10-07
By: [Signature]

DATE RECEIVED BY OPERATOR
DATE: 4-11-07
INITIALS: RM

NAME (PLEASE PRINT) <u>Laura Bills</u>	TITLE <u>Regulatory Assistant</u>
SIGNATURE <u>[Signature]</u>	DATE <u>4/9/2007</u>

(This space for State use only)

RECEIVED
APR 10 2007

DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-37945
Well Name: WV 13AD-8-8-22
Location: 1285' FSL 1252' FWL, SWSW, SECTION 8, T8S, R22E
Company Permit Issued to: QEP UINTA BASIN, INC.
Date Original Permit Issued: 4/13/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No


Signature

4/9/2007
Date

Title: REGULATORY ASSISTANT

Representing: QEP UINTA BASIN, INC.

RECEIVED
APR 10 2007
DIV. OF OIL, GAS & MINING

Form 3160-5
(November 1994)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0135
Expires July 31, 1996

5. Lease Serial No.

UTU-22158

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA/Agreement, Name and/or No.

WONSITS VALLEY UNIT

WONSITS VALLEY UNIT

WV 13AD-8-8-22

9. API Well No.

43-047-37945

10. Field and Pool, or Exploratory Area

WONSITS VALLEY

11. County or Parish, State

Uintah

SUBMIT IN TRIPLICATE - Other Instructions on reverse side

1. Type of Well

Oil Well Gas Well Other

2. Name of Operator

QUESTAR EXPLORATION & PRODUCTION, CO.

3a. Address

1571 East 1700 South, Vernal, UT 84078

3b. Phone No. (include area code)

303-308-3090

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1285' FSL 1252' FWL SWSW SECTION 8, T8S, R22E

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input checked="" type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input type="checkbox"/> Other _____

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Questar Exploration & Production, Co. proposes to change the surface casing depth from 700' to 1100'. Please refer to revised 8-point drilling plan, cement and casing depth.

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

Jan Nelson

Signature

Title

Regulatory Affairs

Date

May 10, 2007

THIS SPACE FOR FEDERAL OR STATE USE

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

RECEIVED

MAY 14 2007

DIV. OF OIL, GAS & MINING

CONFIDENTIAL

DRILLING PROGRAM

ONSHORE OIL & GAS ORDER NO. 1
Approval of Operations on Onshore
Federal Oil and Gas Leases

All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas No. 1, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

1. Formation Tops

The estimated tops of important geologic markers are as follows:

<u>Formation</u>	<u>Depth</u>
Uinta	Surface
Green River	2,970'
Wasatch	6,290'
Mesaverde	9,185'
Sego	11,395'
Castlegate	11,615'
Blackhawk	11,946'
Mancos Shale	12,385'
Mancos B	12,836'
Frontier	15,510'
Dakota Silt	16,383'
Dakota	16,372'
Morrison	16,615'
TD	16,700'

2. Anticipated Depths of Oil Gas Water and Other Mineral Bearing Zones

The estimated depths at which the top and bottom of the anticipated water, oil, gas. Or other mineral bearing formations are expected to be encountered are as follows:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
Gas	Wasatch	6,290'
Gas	Mesaverde	9,185'
Gas	Blackhawk	11,946'
Gas	Mancos Shale	12,385'
Gas	Mancos B	12,836'
Gas	Dakota	16,700'

DRILLING PROGRAM

All fresh water and prospectively valuable minerals encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

All water shows and water-bearing sands will be reported to the BLM in Vernal, Utah. Copies of State of Utah form OGC-8-X are acceptable. If flows are detected, samples will be submitted to the BLM along with any water analyses conducted. Fresh water will be obtained from Wonsits Valley water right # A36125 (which was filed on May 7, 1964,) or Red Wash water right # 49-2153 (which was filed on March 25, 1960). It was determined by the Fish and Wildlife Service that any water right number filed before 1989 is not depleting to the Upper Colorado River System, to supply fresh water for drilling purposes. All water resulting from drilling operations will be disposed of at Red Wash Central Battery Disposal Site; SWSE, Section 27, T7S, R23E or Wonsits Valley Disposal Site; SWNW, Section 12, T8S, R21E.

3. **Operator's Specification for Pressure Control Equipment:**

- A. 11" or 13-5/8" 10,000 psi double gate, 10,000 psi single gate, 10,000 psi annular BOP (schematic included) from 9-5/8" casing point to total depth. The choice of BOP stacks is based on the drilling contractor's availability.
- B. Functional test daily
- C. All casing strings shall be pressure tested (0.2 psi/foot or 1500 psi, whichever is greater) prior to drilling the plug after cementing; test pressure shall not exceed the internal yield pressure of the casing.
- D. Ram type preventers and associated equipment shall be tested to the approved stack working pressure if isolated by test plug or to 50 percent of internal yield pressure of casing whichever is less. BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc..., for a 10M system and individual components shall be operable as designed.

DRILLING PROGRAM

4. **Casing Design:**

Hole Size	Csg. Size	Top (MD)	Bottom (MD)	Wt.	Grade	Thread	Cond.
26"	20"	Sfc	40-60'	Steel	Cond.	None	Used
14-3/4"	10-3/4"	Sfc	1100'	40.5	J-55	LTC	New
8-3/4"	7"	Sfc	9000'	26	HCP-110	LTC	New
8-3/4"	7"	9000'	11,500'	29* SDrift	HCP-110	LTC	New
6-1/8"	4-1/2"	sfc	13,700'	15.1	P-110	LTC	New
6-1/8"	4-1/2"	13,700'	16,700'	15.1	Q-125	LTC	New

Casing Strengths:				Collapse	Burst	Tensile (minimum)
40.5"	40.5 lb.	J-55	STC	1,580 psi	3,130 psi	420,000 lb.
7"	26 lb.	HCP-110	LTC	7,800 psi	9,950 psi	693,000 lb.
7"	29 lb.*	HCP-110	LTC	9,200 psi	11,220 psi	797,000 lb.
4-1/2"	15.1 lb.	P-110	LTC	14,350 psi	14,420 psi	406,000 lb.
4-1/2"	15.1 lb.	Q-125	LTC	15,840 psi	16,380 psi	438,000 lb.

* **Special Drift**

MINIMUM DESIGN FACTORS:

COLLAPSE: 1.125
 BURST: 1.10
 TENSION: 1.80

Area Fracture Gradient: 0.9 psi/foot
 Maximum anticipated mud weight: 15.4 ppg
 Maximum surface treating pressure: 12,500 psi

DRILLING PROGRAM

5. **Auxiliary Equipment**

- A. Kelly Cock – yes
- B. Float at the bit – no
- C. Monitoring equipment on the mud system – visually and/or PVT/Flow Show
- D. Full opening safety valve on the rig floor – yes
- E. Rotating Head – yes
If drilling with air the following will be used:
- F. The blooie line shall be at least 6” in diameter and extend at least 100’ from the well bore into the reserve/blooie pit.
- G. Blooie line ignition shall be provided by a continuous pilot (ignited when drilling below 500’).
- H. Compressor shall be tied directly to the blooie line through a manifold.
- I. A mister with a continuous stream of water shall be installed near the end of the blooie lines for dust suppression.

Surface hole will be drilled with air, air/mist, foam, or mud depending on hole conditions. Drilling below surface casing will be with water based drilling fluids consisting primarily of fresh water, bentonite, lignite, caustic, lime, soda ash and polymers. No chromates will be used. It is not intended to use oil in the mud, however, in the event it is used, oil concentration will be less than 4% by volume. Maximum anticipated mud weight is 15.4 ppg.

No minimum quantity of weight material will be required to be kept on location.

PVT/Flow Show will be used from base of surface casing to TD.

Gas detector will be used from surface casing depth to TD.

6. **Testing, logging and coring program**

- A. Cores – none anticipated
- B. DST – none anticipated

DRILLING PROGRAM

- C. Logging – Mud logging – 4500' to TD
GR-SP-Induction, Neutron Density, FMI
- D. Formation and Completion Interval: Mancos interval, final determination of completion will be made by analysis of logs.
Stimulation – Stimulation will be designed for the particular area of interest as encountered.

7. **Cementing Program**

20" Conductor:

Cement to surface with construction cement.

10-3/4" Surface Casing: sfc – 1100' (MD)

Slurry: 0' – 1100'. 1020 sxs (1224 cu ft) Premium cement + 0.25 lbs/sk Flocele + 2% CaCl₂ Slurry wt: 15.6 ppg, slurry yield: 1.20 ft³/sx, slurry volume: 12-1/4" hole + 100% excess.

7" Intermediate Casing: sfc - 11,500' (MD)

Foamed Lead Slurry 2: 6,000' – 11,000'. 762 sks (1127 cu ft) 50/50 Poz Premium + 5 lb/sk silicalite compacted light weight additive + 20% SSA-1 additive + 0.3% FDP-C766-05 fluid loss + 0.2% Versaset thixotropic additive + 1.5% Zonesealant 2000 foamer. Slurry wt: 14.3 ppg, foamed 11.5 ppg, Slurry yield: 1.48 ft³/sk, Slurry yield foamed: 1.96 ft³/sk, Slurry volume: 8-3/4" hole + 50% excess.

Tail Slurry: 11,000' – 11,500'. 76 sks (113 cu ft) of 50/50 Poz Premium + 5 lb/sk silicalite compacted light weight additive + 20% SSA-1 additive + 0.3% FDP-C766-05 fluid loss + 0.2% Versaset thixotropic additive. Slurry wt: 14.3 ppg, Slurry yield: 1.48 ft³/sk, Slurry volume: 8-3/4" hole + 50% excess.

4-1/2" Production Casing: sfc - 16,700' (MD)

Lead/Tail Slurry: 6,000 - 16,700'. 768 sks (1259 cu ft) Premium Cement + 0.5% HR-12 retarder + 35% SSA-1 + 0.2% Suspend HT + 0.4% Halad(R)-344 fluid loss + 0.3% Halad(R)-413 fluid loss + 0.4% Super CBL gas migration + 0.2% HR-25 retarder. Slurry wt: 15.25 ppg, Slurry yield: 1.64 ft³/sk, Slurry volume: 6-1/8" hole + 25% in open hole section.

*Final cement volumes to be calculated from caliper log with an attempt to be made to circulate cement to the surface on the intermediate string and 5,000' on the production string. A bond log will be run across the zone of interest and across zones as required by the authorized officer to insure protection of natural resources.

DRILLING PROGRAM

8. **Anticipated Abnormal Pressures and Temperatures, Other Potential Hazards**

No abnormal temperatures or pressures are anticipated. No H₂S has been encountered in or known to exist from previous wells drilled to similar depths in the general area. Maximum anticipated bottom hole pressure equals approximately 10,420 psi. Maximum anticipated bottom hole temperature is 320° F.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other Instructions on reverse side.

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. UTU 22158
2. Name of Operator Questar Exploration and Production Company		6. If Indian, Allottee, or Tribe Name n/a
3a. Address 1571 E 1700 S VERNAL UT 84078	3b. Phone No. (include area code) 435-781-4032	7. If Unit or CA. Agreement Name and/or No. Wonsits Valley Unit
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) SW/4 SW/4 1285 1252 8 T8S R22E Long. 109.469800 FSL FWL		8. Well Name and No. WV 13AD-8-8-22
Lat. 40.134719		9. API Well No. 43-047-37945
		10. Field and Pool, or Exploratory Area Wonsits Valley
		11. County or Parish, State UINTAH UTAH

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/ Resume)	<input type="checkbox"/> Water Shut-off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and abandon	<input type="checkbox"/> Temporarily Abandon	_____
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug back	<input type="checkbox"/> Water Disposal	_____

13. Describe Proposed or Completed Operation (clearly state all pertinent details including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths or pertinent markers and sands. Attach the Bond under which the work will performed or provide the Bond No. on file with the BLM/ BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notice shall be filed only after all requirements, including reclamantion, have been completed, and the operator has determined that the site is ready for final inspection.)

THIS SUNDRY IS BEING SUBMITTED TO DOCUMENT TELEPHONE CONVERSATIONS OF MAY 13, 2007 BETWEEN JIM ASHLEY OF YOUR OFFICE AND JON GENT, REGIONAL DRILLING MANAGER FOR QUESTAR. QUESTAR SPUD THIS WELL 5/12/07. QUESTAR WAS DRILLING THE SURFACE HOLE AND BECAME STUCK AT 1040' ON 5/13/07; UNABLE TO GET OUT OF HOLE AND HOLE COLLAPSED. BLM AND UDOGM REPRESENTATIVES WERE NOTIFIED EVENING OF MAY 13, 2007 THAT QUESTAR PLANNED TO P&A THIS SURFACE HOLE AND SKID RIG. THE HOLE WAS CEMENTED WITH 400 SACKS 15.8 PPG (2% CACL) FROM 690' TO 1035'. A SECOND CEMENT PLUG 200' TO SURFACE IS BEING SET 5/14/07 AM. THERE IS A MUD SPACER BETWEEN THESE TWO PLUGS. THESE CEMENT JOBS ARE BEING WITNESSED BY JAMIE SPARGER OF THE VERNAL BLM OFFICE.

If additional information is needed, please contact Jan Nelson (435) 781-4032.

14. I hereby certify that the foregoing is true and correct.

Name (Printed/ Typed) Jan Nelson	Title Regulatory Affairs
Signature 	Date May 14, 2007

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001 AND Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

RECEIVED
MAY 15 2007
DIV. OF OIL GAS & ...

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

CONFIDENTIAL

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other Instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
 Questar Exploration and Production Company

3a. Address
 1571 E 1700 S
 VERNAL UT 84078

3b. Phone No. (include area code)
 435-781-4032

4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Lat. 40.134719
 SW/4 SW/4 1285 1252 8 T8S R22E Long. 109.469800
 FSL FWL

5. Lease Serial No.
UTU 22158

6. If Indian, Allottee, or Tribe Name
 n/a

7. If Unit or CA. Agreement Name and/or No.
Wonsits Valley Unit

8. Well Name and No.
WV 13AD-8-8-22

9. API Well No.
43-047-37945

10. Field and Pool, or Exploratory Area
Wonsits Valley

11. County or Parish, State
UINTAH UTAH

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/ Resume)	<input type="checkbox"/> Water Shut-off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and abandon	<input type="checkbox"/> Temporarily Abandon	_____
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug back	<input type="checkbox"/> Water Disposal	_____

13. Describe Proposed or Completed Operation (clearly state all pertinent details including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths or pertinent markers and sands. Attach the Bond under which the work will performed or provide the Bond No. on file with the BLM/ BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notice shall be filed only after all requirements, including reclamantion, have been completed, and the operator has determined that the site is ready for final inspection.)

THIS SUNDRY IS BEING SUBMITTED TO DOCUMENT THE P&A PROCEDURE ON THIS WELLBORE:

QUESTAR SPUD THE WELL 5/12/07 AND WAS DRILLING THE SURFACE HOLE AND BECAME STUCK AT 1040' ON 5/13/07; UNABLE TO GET OUT OF HOLE AND HOLE COLLAPSED. EVENING OF MAY 13, 2007 INTO MORNING OF MAY 14, 2007 PUMPED 400 SACKS 15.8 PPG (2% CACL) FROM 690' TO 1035'. 5/14/07 TAGGED CEMENT AT 565'. PUMPED ANOTHER 450 SACKS OF 15.8 PPG (2% CACL) CEMENT. PULLED OUT OF HOLE AND SPOTTED 350 SACKS OF 15.8 PPG (2% CACL) CEMENT FOR FINAL PLUG AT SURFACE. HOLE FROM SURFACE TO TD FILLED WITH CEMENT. CEMENT JOBS WERE WITNESSED BY JAMIE SPARGER OF THE VERNAL BLM OFFICE. MAY 14, 2007 RIGGED DOWN AND MOVED OFF; RIG RELEASED. If additional information is needed, please contact Jan Nelson (435) 781-4032.

14. I hereby certify that the foregoing is true and correct.

Name (Printed/ Typed) Jan Nelson	Title Regulatory Affairs
Signature 	Date May 16, 2007

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

RECEIVED

Title 18 U.S.C. Section 1001 AND Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

MAY 18 2007

(Instructions on page 2)

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other Instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
 Questar Exploration and Production Company

3a. Address
 1571 E 1700 S
 VERNAL UT 84078

3b. Phone No. (include area code)
 435-781-4032

4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Lat. 40.134719
 SW/4 SW/4 1285 1252 8 T8S R22E Long. 109.469800
 FSL FWL

5. Lease Serial No.
UTU 22158

6. If Indian, Allottee, or Tribe Name
 n/a

7. If Unit or CA. Agreement Name and/or No.
Wonsits Valley Unit

8. Well Name and No.
WV 13AD-8-8-22

9. API Well No.
43-047-37945

10. Field and Pool, or Exploratory Area
Wonsits Valley

11. County or Parish, State
UINTAH UTAH

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and abandon	<input type="checkbox"/> Temporarily Abandon	_____
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug back	<input type="checkbox"/> Water Disposal	_____

13. Describe Proposed or Completed Operation (clearly state all pertinent details including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths or pertinent markers and sands. Attach the Bond under which the work will performed or provide the Bond No. on file with the BLM/ BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notice shall be filed only after all requirements, including reclamantion, have been completed, and the operator has determined that the site is ready for final inspection.)

THIS SUNDRY IS BEING SUBMITTED TO DOCUMENT THE P&A PROCEDURE ON THIS WELLBORE:
 QUESTAR SPUD THE WELL 5/12/07 AND WAS DRILLING THE SURFACE HOLE AND BECAME STUCK AT 1040' ON 5/13/07; UNABLE TO GET OUT OF HOLE AND HOLE COLLAPSED. EVENING OF MAY 13, 2007 INTO MORNING OF MAY 14, 2007 PUMPED 400 SACKS 15.8 PPG (2% CACL) FROM 690' TO 1035'. 5/14/07 TAGGED CEMENT AT 565'. PUMPED ANOTHER 450 SACKS OF 15.8 PPG (2% CACL) CEMENT. PULLED OUT OF HOLE AND SPOTTED 350 SACKS OF 15.8 PPG (2% CACL) CEMENT FOR FINAL PLUG AT SURFACE. HOLE FROM SURFACE TO TD FILLED WITH CEMENT. CEMENT JOBS WERE WITNESSED BY JAMIE SPARGER OF THE VERNAL BLM OFFICE. MAY 14, 2007 RIGGED DOWN AND MOVED OFF; RIG RELEASED.
 If additional information is needed, please contact Jan Nelson (435) 781-4032.

14. I hereby certify that the foregoing is true and correct.

Name (Printed/ Typed) Title
 Jan Nelson Regulatory Affairs

Signature Date
 May 16, 2007

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by Title Date
 _____ _____ _____

Conditions of approval, if any are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001 AND Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

MAY 18 2007

(Instructions on page 2)

**UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
WELL COMPLETION OR RECOMPLETION REPORT AND LOG**

FORM APPROVED

OMB NO 1004-0137

Expires March 31, 2007

5 LEASE DESIGNATION AND SERIAL NO

UTU 22158

1a Type of Well Oil Well Gas Well Dry Other

b Type of Completion New Well Workover Deepen Plug Back Diff Resvr

Other _____

6 INDIAN ALLOTTEE OR TRIBE NAME

N/A

7 UNIT AGREEMENT

WONSITS VALLEY UNIT

8 FARM OR LEASE NAME

WV 13AD-8-8-22

2 Name of Operator
Questar Exploration and Production Company

CONFIDENTIAL

3 Address

1571 E 1700 S VERNAL UT 84078

3a Phone No (include area code)

(303) 308-3068

9 API WELL NO

43-047-37945

4 Location of Well (Report location clearly and in accordance with Federal requirements)*

At surface **1285' FSL x 1252' FWL SW/4 SECTION 8-T8S-R22E**

At top prod. Interval reported below **same**

At total depth **same**

10 FIELD NAME

Wonsits Valley

11 SEC. T, R, M., OR BLOCK AND SURVEY OR AREA **8 T8S R22E**

12 COUNTY OR PARISH

UINTAH

13 STATE

UTAH

17 ELEVATIONS (DF, RKB, RT, GR, etc)*

14 Date Spudded

5/12/2007

15 Date T.D. Reached

5/13/2007

16 Date Completed **5/14/07**

X P & A

Ready to Prod

18 Total Depth MD 1040'

TVD

19 Plug back T.D. MD

TVD

20 Depth Bridge Plug Set MD

TVD

21 Type Electric & other Logs Run (Submit a copy of each)
none

22. Was well cored? No Yes (Submit analysis)
Was DST run? No Yes (Submit report)
Directional Survey? No Yes (Submit copy)

23 Casing and Liner Record (Report all strings set in well)

Hole Size	Size/ Grade	Wt (#/ft.)	Top (MD)	Bottom(MD)	Stage Cementer Depth	No. of Sks. & Type of Cement	Slurry Vol. (Bbl)	Cement Top*	Amount Pulled
14-3/4"	10-3/4"	40.5	surface	1040'		1200 sx cmt		surface	
						15.8 ppg (2%CACL)			

24 Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)

25 Producing Intervals

Formation	Top	Bottom
A)		
B)		
C)		
D)		

26 Perforation Record

Perforated Interval	Size	No. of Holes	Perf Status

27 Acid, Fracture Treatment, Cement Squeeze, Etc.

Depth Interval	Amount and Type of Material

RECEIVED

MAY 31 2007

DIV. OF OIL, GAS & MINERAL

28 Production- Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil Bbl	Gas MCF	Water Bbl	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press Flwg. SI	Csg. Press	24 Hr. Rate	Oil Bbl	Gas MCF	Water Bbl	Gas: Oil Ratio	Well Status	
			→						P+A

28a Production- Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil Bbl	Gas MCF	Water Bbl	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press Flwg. SI	Csg. Press	24 Hr. Rate	Oil Bbl	Gas MCF	Water Bbl	Gas: Oil Ratio	Well Status	
			→						

* See instructions and spaces for additional data on page 2)

CONFIDENTIAL

28b. Production- Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil Bbl	Gas MCF	Water Bbl	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press Flwg. SI	Csg. Press.	24 Hr Rate →	Oil Bbl	Gas MCF	Water Bbl	Gas Oil Ratio	Well Status	

28c. Production- Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil Bbl	Gas MCF	Water Bbl	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press Flwg. SI	Csg. Press.	24 Hr Rate →	Oil Bbl	Gas MCF	Water Bbl	Gas Oil Ratio	Well Status	

29. Disposition of Gas (Sold, used for fuel, vented, etc.)

30. Summary of Porous Zones (include Aquifers):
Show all important zones of porosity and contents thereof. Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries

31. Formation (Log) Markers:

Formation	Top	Bottom	Descriptions Contents, Etc.	Name	Top
					Measured Depth

32. Additional remarks (include plugging procedure):


Surface hole collapsed 5/13/07. P&A'd this wellbore; will skid rig on location.

33. Indicate which items have been attached by placing a check in the appropriate boxes:

<input type="checkbox"/> Electrical/ Mechanical Logs (1 full set required)	<input type="checkbox"/> Geologic Report	<input type="checkbox"/> DST Report	<input type="checkbox"/> Directional Survey
<input type="checkbox"/> Sundry Notice for plugging and cement verification	<input type="checkbox"/> Core Analysis	<input type="checkbox"/> Other:	

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) Debra K. Stanbery Title Supervisor, Regulatory Affairs

Signature  Date 29-May-07

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
 Questar Exploration and Production Company

3a. Address
 1571 E 1700 S
 VERNAL UT 84078

3b. Phone No. (include area code)
 435-781-4032

4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Lat. 40.134719
 SW/4 SW/4 1285 1252 8 T8S R22E Long. 109.469800
 FSL FWL

CONFIDENTIAL

5. Lease Serial No. **UTU 22158**

6. If Indian, Allottee, or Tribe Name
 n/a

7. If Unit or CA. Agreement Name and/or No.
Wonsits Valley Unit

8. Well Name and No.
WV 13AD-8-8-22

9. API Well No.
43-047-37945

10. Field and Pool, or Exploratory Area
Wonsits Valley

11. County or Parish, State
UINTAH UTAH

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and abandon	<input type="checkbox"/> Temporarily Abandon	_____
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug back	<input type="checkbox"/> Water Disposal	_____

13. Describe Proposed or Completed Operation (clearly state all pertinent details including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths or pertinent markers and sands. Attach the Bond under which the work will performed or provide the Bond No. on file with the BLM/ BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notice shall be filed only after all requirements, including reclamantion, have been completed, and the operator has determined that the site is ready for final inspection.)

THIS SUNDRY IS BEING SUBMITTED TO DOCUMENT THE P&A PROCEDURE ON THIS WELLBORE:

QUESTAR SPUD THIS WELL 5/12/07 AND WAS DRILLING THE SURFACE HOLE AND BECAME STUCK AT 1040' ON 5/13/07; UNABLE TO GET OUT OF HOLE AND HOLE COLLAPSED. EVENING OF MAY 13, 2007 INTO MORNING OF MAY 14, 2007 PUMPED 400 SACKS 15.8 PPG (2% CACL) FROM 690' TO 1035'. 5/14/07 TAGGED CEMENT AT 565'. PUMPED ANOTHER 450 SACKS OF 15.8 PPG (2% CACL) CEMENT. PULLED OUT OF HOLE AND SPOTTED 350 SACKS OF 15.8 PPG (2% CACL) CEMENT FOR FINAL PLUG AT SURFACE. HOLE FROM SURFACE TO TD FILLED WITH CEMENT. CEMENT JOBS WERE WITNSSED BY JAMIE SPARGER OF THE VERNAL BLM OFFICE. MAY 14, 2007 RIGGED DOWN AND MOVED OFF; RIG RELEASED. If additional information is needed, please contact Jan Nelson (435) 781-4032.

RECEIVED
MAY 21 2007

14. I hereby certify that the foregoing is true and correct.

Name (Printed/ Typed) Jan Nelson	Title Regulatory Affairs
Signature	Date May 16, 2007

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001 AND Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No 1004-0137
Expires: March 31, 2007

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other Instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
 Questar Exploration and Production Company

3a. Address
 1571 E 1700 S
 VERNAL UT 84078

3b. Phone No. (include area code)
 435-781-4032

4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Lat. Long.
 SW/4 SW/4 1285 1252 8 T8S R22E Long. 40.134719 109.469800
 FSL FWL

5. Lease Serial No.
UTU 22158

6. If Indian, Allottee, or Tribe Name
 n/a

7. If Unit or CA. Agreement Name and/or No.
Wonsits Valley Unit

8. Well Name and No.
WV 13AD-8-8-22

9. API Well No.
43-047-37945

10. Field and Pool, or Exploratory Area
Wonsits Valley

11. County or Parish, State
UINTAH UTAH

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/ Resume)	<input type="checkbox"/> Water Shut-off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths or pertinent markers and sands. Attach the Bond under which the work will be performed or provide the Bond No. on file with the BLM/ BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notice shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

THIS SUNDRY IS BEING SUBMITTED TO DOCUMENT TELEPHONE CONVERSATIONS OF MAY 13, 2007 BETWEEN JIM ASHLEY OF YOUR OFFICE AND JON GENT, REGIONAL DRILLING MANAGER FOR QUESTAR. QUESTAR SPUD THIS WELL 5/12/07. QUESTAR WAS DRILLING THE SURFACE HOLE AND BECAME STUCK AT 1040' ON 5/13/07; UNABLE TO GET OUT OF HOLE AND HOLE COLLAPSED. BLM AND UDOGM REPRESENTATIVES WERE NOTIFIED EVENING OF MAY 13, 2007 THAT QUESTAR PLANNED TO P&A THIS SURFACE HOLE AND SKID RIG. THE HOLE WAS CEMENTED WITH 400 SACKS 15.8 PPG (2% CACL) FROM 690' TO 1035'. A SECOND CEMENT PLUG 200' TO SURFACE IS BEING SET 5/14/07 AM. THERE IS A MUD SPACER BETWEEN THESE TWO PLUGS. THESE CEMENT JOBS ARE BEING WITNESSED BY JAMIE SPARGER OF THE VERNAL BLM OFFICE.

If additional information is needed, please contact Jan Nelson (435) 781-4032.

RECEIVED
MAY 31 2007

14. I hereby certify that the foregoing is true and correct.

Name (Printed/ Typed) Jan Nelson	Title DIV. OF OIL, GAS & MINING Regulatory Affairs
Signature <i>Jan Nelson</i>	Date May 14, 2007

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by <i>James F. Ashley</i>	Title Petroleum Engineer	Date MAY 14 2007
---------------------------------------	-----------------------------	---------------------

Conditions of approval, if any are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001 AND Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

CONFIDENTIAL

CONDITIONS OF APPROVAL FOR WELL ABANDONMENT

Company **Questar E & P**
Well No. **WV 13AD-8-8-22**

Location: **Sec 8 T8S R22E**
Lease No. **UTU-22158**

GOVERNMENT CONTACTS
BUREAU OF LAND MANAGEMENT - VERNAL FIELD OFFICE
170 South 500 East, Vernal, Utah 84078 (435) 781-4400

Petroleum Engineer: Matt Baker	Cell: 828-4470	Office: 781-4490
Petroleum Engineer: Jim Ashley	Cell: 828-7874	Office: 781-4470
Petroleum Engineer: Ryan Angus	Cell: 828-7368	Office: 781-4430
Petroleum Engineer: Michael Lee	Cell: 828-7875	Office: 781-4432
Suprv. I&E Inspector: Jamie Sparger	Cell: 828-3913	Office: 781-4502

**A COPY OF THESE CONDITIONS SHALL BE GIVEN TO
YOUR FIELD REPRESENTATIVE TO ENSURE COMPLIANCE**

STANDARD CONDITIONS OF APPROVAL

1. This office shall be notified sufficiently in advance of actual plugging work so that a representative may have an opportunity to witness the operation. If time permits, please try to notify this office at least 24 hours in advance of rigging up. **Notify Jamie Sparger**
2. Prior to perforating any casing string, adequate BOPs, lubricators, and controls shall be installed and function tested.
3. If paraffin or scale deposits are detected while pulling the tubing or any other production equipment out of the wellbore, hot water treatments and/or scraper runs shall be conducted before placing any cement plugs.
4. It will be left to the discretion of the BLM representative on location while plugging as to whether or not any of the plugs shall need to be tagged.
5. Upon completion of the approved plugging program, a dry hole marker shall be installed in accordance with 43 CFR 3162.6(b) and clean up the site. The marker shall be a flat plate (with a weep hole) not less than 1/4 inch in thickness and large enough to contain all of the information identified below and shall be buried a minimum of three (3) foot below re-contoured surface level. Pits must be fenced unless approved otherwise by the authorized officer.
6. The following minimum information will be permanently and legibly placed on the marker with a plate, cap or welded bead:

CONFIDENTIAL

- A. Name of the operator.
 - B. Lease serial number.
 - C. Well number.
 - D. Surveyed description of the well; section, township and range and either footages or quarter-quarter section.
7. Within 30 days after well bore plugging operations have been completed, Form 3160-5 (formerly Form 9-331), Subsequent Report of Abandonment, shall be submitted to this office. The report must show the location of all plugs or any mechanical setting device, quantity and type of cement and additives in each plug, amount of casing or any tubulars left in the hole, methods used to test plugs and test results, and the status of the surface restoration. If a temporary delay in the removal of equipment or surface cleanup is deemed necessary, so justify in your report. This abandonment report will be approved by this office with surface stipulations. Liability for the well shall not be released until the surface management agency approves the actual site rehabilitation.
8. If not previously filed, submit in duplicate, Form 3160-4 (formerly Form 9-330), Well completion or Recompletion Report and Log, well history, electric logs, any other surveys, and, if taken, core analysis. This completion report must be filed within 30 days after the culmination of downhole plugging operations.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

5. Lease Designation and Serial No.
UTU-22158

6. If Indian, Allottee or Tribe Name
N/A

7. If Unit or CA, Agreement Designation
WONSITS VALLEY UNIT

8. Well Name and No.
WV 13AD 8 8 22

9. API Well No.
43-047-37945

10. Field and Pool, or Exploratory Area
WONSITS VALLEY

11. County or Parish, State
UINTAH, UTAH

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to deepen or reentry to a different reservoir
Use "APPLICATION FOR PERMIT..." for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
Oil Gas
 Well Well Other

2. Name of Operator
QUESTAR EXPLORATION & PRODUCTION, CO.

3. Address and Telephone No
1571 E. 1700 S. - VERNAL, UT 84078-8526
Contact: **Dahn.Caldwell@questar.com**
435-781-4342 Fax 435-781-4357

4. Location of Well (Footage, Sec. T. R. M., or Survey Description)
1285' F8L, 1252' FW1, SWSW, SEC 8-T8S-R22E

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Abandonment
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Plugging Back
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Altering Casing
	<input checked="" type="checkbox"/> Other <u>SPUD</u>
	<input type="checkbox"/> Change of Plans
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Dispose Water

(Note) Report results of multiple completion on Well Completion or Recognition Report and Log Form.

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface location and measured and true vertical depths for all markers and zones pertinent to this work)
On 5/10/07 - Drilled 80' of 26" conductor hole. Set 20" conductor pipe. Cement w/ Ready Mix.

RECEIVED
JUN 04 2007
DIV. OF OIL, GAS

3 - BLM, 2 - Utah OG&M, 1 - Denver, 1 - Etc. Ward Supervisor

14. I hereby certify that the foregoing is true and correct.
Signed **Dahn F. Caldwell** *Dahn Caldwell* **Office Administrator II** Date **6/1/07**

(This space for Federal or State office use)
Approved by: _____ Title _____ Date _____
Conditions of approval, if any _____

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any materially false statements or representations as to any matter within its jurisdiction.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir
Use "APPLICATION FOR PERMIT—" for such proposals

5. Lease Designation and Serial No.

UTU-22158

6. If Indian, Allottee or Tribe Name

N/A

7. If Unit or CA, Agreement Designation

WONSITS VALLEY UNIT

8. Well Name and No.

WV 13AD 8 8 22

9. API Well No.

43-047-37945

10. Field and Pool, or Exploratory Area

WONSITS VALLEY

11. County or Parish, State

UINTAH, UTAH

SUBMIT IN TRIPLICATE

1. Type of Well

Oil Gas
 Well Well Other

CONFIDENTIAL

2. Name of Operator

QUESTAR EXPLORATION & PRODUCTION, CO.

3. Address and Telephone No.

1571 E. 1700 S. - VERNAL, UT 84078-8526

Contact: Dahn.Caldwell@questar.com

435-781-4342 Fax 435-781-4357

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1285' FSL, 1252' FWL, SWSW, SEC 8-T8S-R22E

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input checked="" type="checkbox"/> Abandonment
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Plugging Back
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Altering Casing
	<input checked="" type="checkbox"/> Other <u>P&A</u>
	<input type="checkbox"/> Change of Plans
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Dispose Water

(Note) Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work)

Please be advised that on 5/13/07 - 5/14/07 we plugged & abandon this well.

- 1 - On 5/13/07, Trip in to P&A hole.
- 2 - Pump 400 sxs of cement @ 690' will tag top of plug.
- 3 - Trip in & tag top of plug @ 570'. Pump 450 sxs of cement.
- 4 - Pump 350 sxs of cement.
- 5 - BLM was on location for plugging/Jamie.

RECEIVED

JUL 20 2007

DIV. OF OIL, GAS & MINING

3 - BLM, 2- Utah OG&M, 1 - Denver, 1 - file Word file-server

14. I hereby certify that the foregoing is true and correct.

Signed **Jim Simonton**

Jim Simonton (Signature)

Completion Supervisor

Date

7/10/07

(This space for Federal or State office use)

Approved by:

Title

Date

Conditions of approval, if any

CONFIDENTIAL