

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED  
OMB No. 1004-0136  
Expires November 30, 2000

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. <b>UTU-37355</b>
b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator <b>KERR MCGEE OIL &amp; GAS ONSHORE LP</b>		7. If Unit or CA Agreement, Name and No.
3A. Address <b>1368 SOUTH 1200 EAST VERNAL, UT 84078</b>	3b. Phone No. (include area code) <b>(435) 781-7024</b>	8. Lease Name and Well No. <b>BONANZA 1023-17G</b>
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface <b>SWNE 2208'FNL, 1850'FEL 641186X 39. 950071</b> At proposed prod. Zone <b>4423313Y -109. 347272</b>		9. API Well No. <b>43-047-38236</b>
14. Distance in miles and direction from nearest town or post office* <b>27.8 MILES SOUTHEAST OF OURAY, UTAH</b>		10. Field and Pool, or Exploratory <b>NATURAL BUTTES</b>
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) <b>1850'</b>	16. No. of Acres in lease <b>1920.00</b>	11. Sec., T., R., M., or Blk, and Survey or Area <b>SECTION 17, T10S, R23E</b>
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. <b>REFER TO TOPO C</b>	19. Proposed Depth <b>7760'</b>	12. County or Parish <b>UINTAH</b>
21. Elevations (Show whether DF, KDB, RT, GL, etc.) <b>5181'GL</b>	22. Approximate date work will start*	13. State <b>UTAH</b>
20. BLM/BIA Bond No. on file <b>BOND NO. 2971100-2533</b>		17. Spacing Unit dedicated to this well <b>40.00</b>
23. Estimated duration		

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- |  |   |
|--|---|
| 1. Well plat certified by a registered surveyor.   | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).   |
| 2. A Drilling Plan.  | 5. Operator certification.  |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office. | 6. Such other site specific information and/or plans as may be required by the authorized office. |

25. Signature 	Name (Printed/Typed) <b>SHEILA UPCHEGO</b>	Date <b>5/31/2006</b>
Title <b>REGULATORY ANALYST</b>		
Approved by Signature 	Name (Printed/Typed) <b>BRADLEY G. HILL</b>	Date <b>06-15-06</b>
Title <b>ENVIRONMENTAL MANAGER</b>	Office	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on reverse)

Federal Approval of this  
Action is Necessary

RECEIVED  
JUN 05 2006  
DIV. OF OIL, GAS & MINING

# T10S, R23E, S.L.B.&M.

## Kerr-McGee Oil & Gas Onshore LP


Well location, BONANZA #1023-17G, located as shown in the SW 1/4 NE 1/4 of Section 17, T10S, R23E, S.L.B.&M. Uintah County, Utah.

### BASIS OF ELEVATION

BENCH MARK 58 EAM (1965) LOCATED IN THE NE 1/4 OF SECTION 30, T9S, R23E, S.L.B.&M. TAKEN FROM THE RED WASH SE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5132 FEET.

### BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.




SCALE

### CERTIFICATION

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

*Robert A. ...*  
 REGISTERED LAND SURVEYOR  
 REGISTRATION NO. 101319  
 STATE OF UTAH

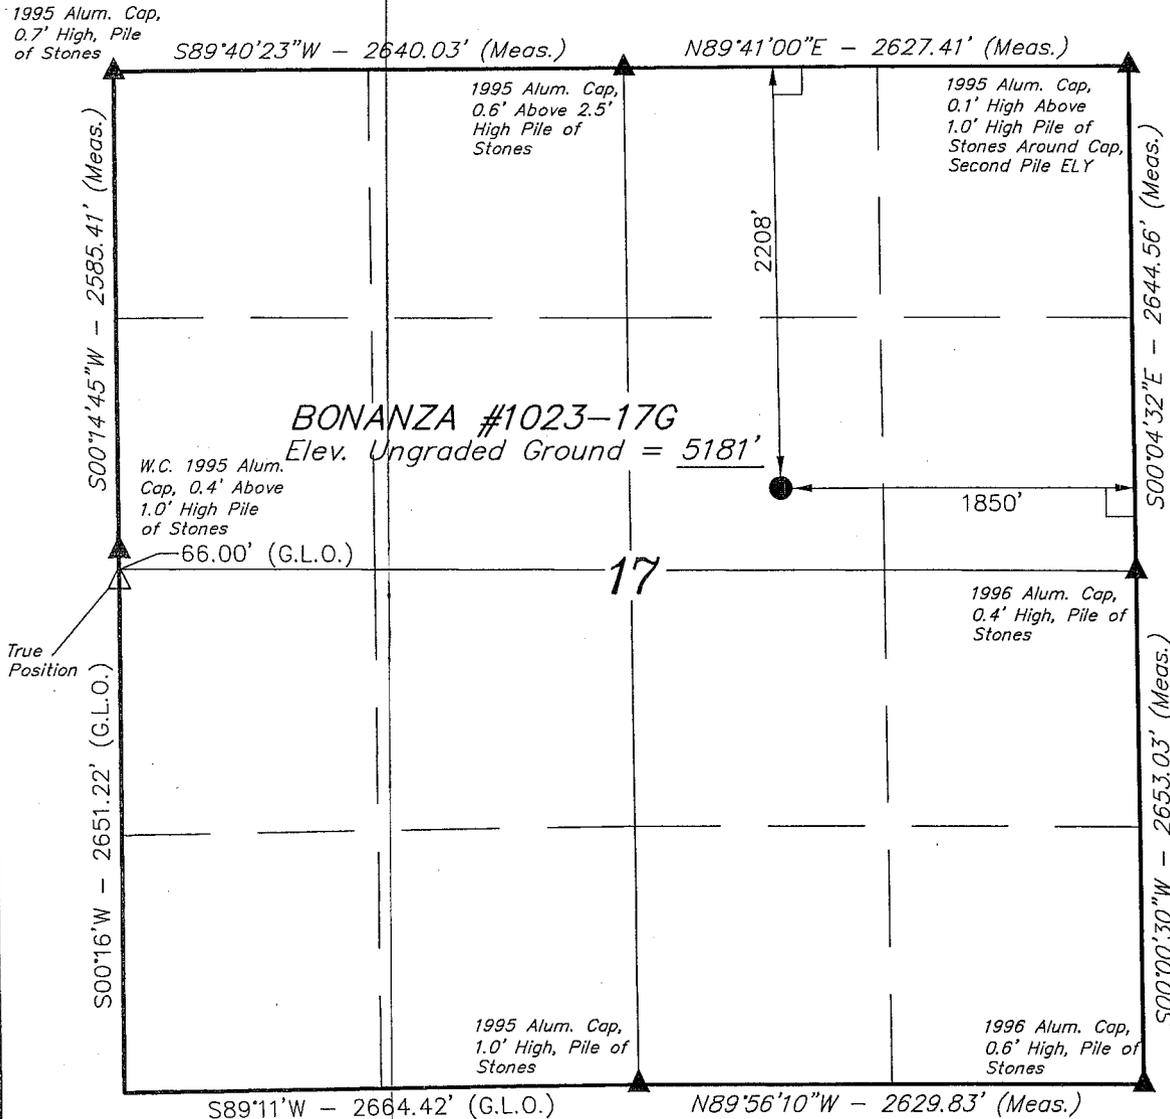

### LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.
- △ = SECTION CORNERS RE-ESTABLISHED. (Not Set on Ground.)

(NAD 83)  
 LATITUDE = 39°57'00.72" (39.950200)  
 LONGITUDE = 109°20'52.45" (109.347903)  
 (NAD 27)  
 LATITUDE = 39°57'00.84" (39.950233)  
 LONGITUDE = 109°20'50.01" (109.347225)

**UINTAH ENGINEERING & LAND SURVEYING**  
 85 SOUTH 200 EAST - VERNAL, UTAH 84078  
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 02-28-06	DATE DRAWN: 03-08-06
PARTY J.R. L.M. C.H.	REFERENCES G.L.O. PLAT	
WEATHER COOL	FILE Kerr-McGee Oil & Gas Onshore LP	

**BONANZA #1023-17G  
SW/NE Sec. 17, T10S,R23E  
UINTAH COUNTY, UTAH  
UTU-37355**

**ONSHORE ORDER NO. 1**

***DRILLING PROGRAM***

**1. Estimated Tops of Important Geologic Markers:**

<u>Formation</u>	<u>Depth</u>
Uinta	0- Surface
Green River	886'
Top of Birds Nest Water	1076'
Mahogany	1662'
Wasatch	3764'
Mesaverde	5901'
MVU2	6730'
MVL1	7277'
TD	7760'

**2. Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:**

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
Water	Green River	886'
	Top of Birds Nest Water	1076'
	Mahogany	1662'
Gas	Wasatch	3764'
	Mesaverde	5901'
Gas	MVU2	6730'
Gas	MVL1	7277'
Water	N/A	
Other Minerals	N/A	

**3. Pressure Control Equipment (Schematic Attached)**

*Please refer to the attached Drilling Program.*

**4. Proposed Casing & Cementing Program:**

*Please refer to the attached Drilling Program.*

**5. Drilling Fluids Program:**

*Please refer to the attached Drilling Program.*

**6. Evaluation Program:**

*Please refer to the attached Drilling Program.*

7. **Abnormal Conditions:**

Maximum anticipated bottomhole pressure calculated at 7760' TD, approximately equals 4811 psi (calculated at 0.62 psi/foot).

Maximum anticipated surface pressure equals approximately 3104 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. **Anticipated Starting Dates:**

*Drilling is planned to commence immediately upon approval of this application.*

9. **Variances:**

*Please refer to the attached Drilling Program.*


10. **Other Information:**

*Please refer to the attached Drilling Program.*



# KERR-McGEE OIL & GAS ONSHORE LP DRILLING PROGRAM

COMPANY NAME KERR-McGEE OIL & GAS ONSHORE LP DATE May 31, 2006  
 WELL NAME BONANZA 1023-17G TD 7,760' MD/TVD \_\_\_\_\_  
 FIELD Natural Buttes COUNTY Uintah STATE Utah ELEVATION 5,181' GL KB 5,196'  
 SURFACE LOCATION SWNE SECTION 17, T10S, R23E 2208'FNL, 1850'FEL BHL Straight Hole  
 Latitude: 39.950200 Longitude: 109.347903  
 OBJECTIVE ZONE(S) Wasatch/Mesaverde  
 ADDITIONAL INFO Regulatory Agencies: BLM (SURF & MINERALS), UDOGM, Tri-County Health Dept.

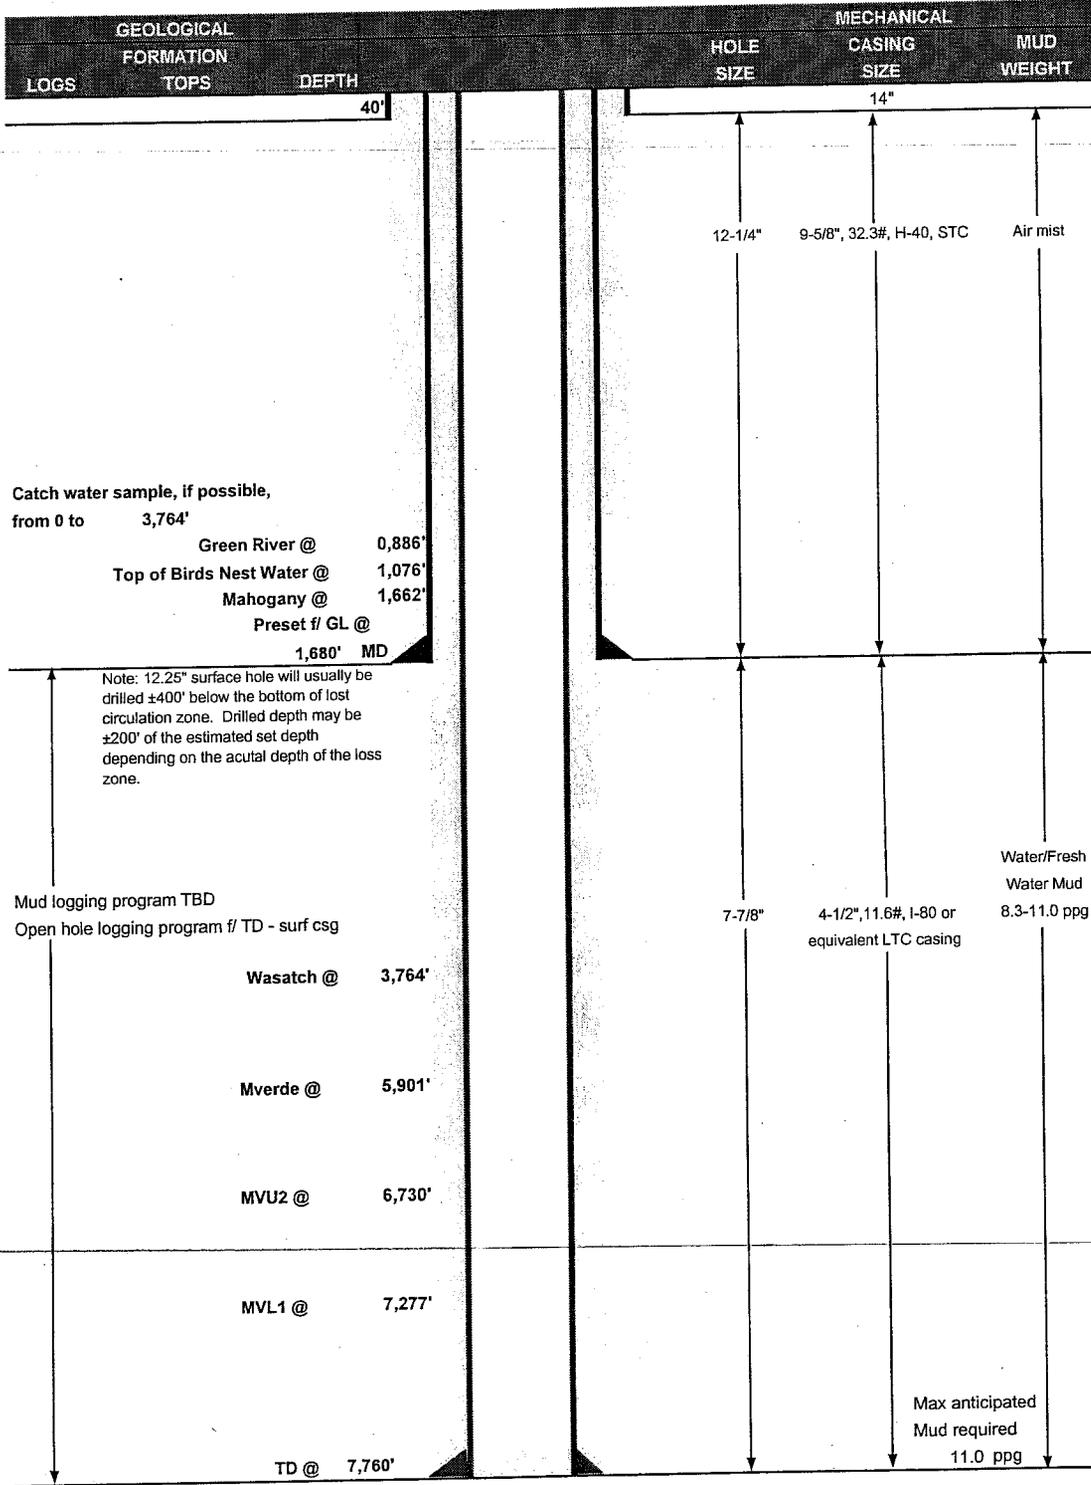



**KERR-McGEE OIL & GAS ONSHORE LP  
DRILLING PROGRAM**

**CASING PROGRAM**

	SIZE	INTERVAL	WT.	GR.	CPLG	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'				2270	1370	254000
SURFACE	9-5/8"	0 to 1680	32.30	H-40	STC	0.83***** 7780	1.74 6350	5.35 201000
PRODUCTION	4-1/2"	0 to 7760	11.60	I-80	LTC	2.85	1.43	2.56

1) Max Anticipated Surf. Press.(MASP) (Surface Casing) = (Pore Pressure at next csg point-(0.22 psi/ft-partial evac gradient x TVD of next csg point)  
 2) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft-partial evac gradient x TD)  
 (Burst Assumptions: TD = 11.0 ppg) .22 psi/ft = gradient for partially evac wellbore  
 (Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing\*Buoy.Fact. of water)  
 MASP 2732 psi  
 \*\*\*\*\* Burst SF is low but csg is much stronger than formation at 2000'. EMW @ 2000' for 2270# is 21.8 ppg or 1.13 psi/ft

**CEMENT PROGRAM**

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	LEAD	500	Premium cmt + 2% CaCl + .25 pps flocele	215	60%	15.60	1.18
<b>Option 1</b>	TOP OUT CMT (1)	200	20 gals sodium silicate + Premium cmt + 2% CaCl + .25 pps flocele	50		15.60	1.18
	TOP OUT CMT (2)	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
SURFACE		<b>NOTE: If well will circulate water to surface, option 2 will be utilized</b>					
<b>Option 2</b>	LEAD	1500	Prem cmt + 16% Gel + 10 pps gilsonite + .25 pps Flocele + 3% salt BWOC	170	35%	11.00	3.82
	TAIL	500	Premium cmt + 2% CaCl + .25 pps flocele	180	35%	15.60	1.18
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
PRODUCTION	LEAD	3,260'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	360	60%	11.00	3.38
	TAIL	4,500'	50/50 Poz/G + 10% salt + 2% gel +.1% R-3	1260	60%	14.30	1.31

\*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained  
 \*Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

**FLOAT EQUIPMENT & CENTRALIZERS**

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.



**ADDITIONAL INFORMATION**

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.  
 BOPE: 11" 5M with one annular and 2 rams. Test to 5,000 psi (annular to 2,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.  
 Drop Totco surveys every 2000'. Maximum allowable hole angle is 5 degrees.  
 Most rigs have PVT Systems for mud monitoring. If no PVT is available, visual monitoring will be utilized.

DRILLING ENGINEER: \_\_\_\_\_  
 Brad Laney  
 DRILLING SUPERINTENDENT: \_\_\_\_\_  
 Randy Bayne

DATE: \_\_\_\_\_  
 DATE: \_\_\_\_\_

# 5M BOP STACK and CHOKE MANIFOLD SYSTEM

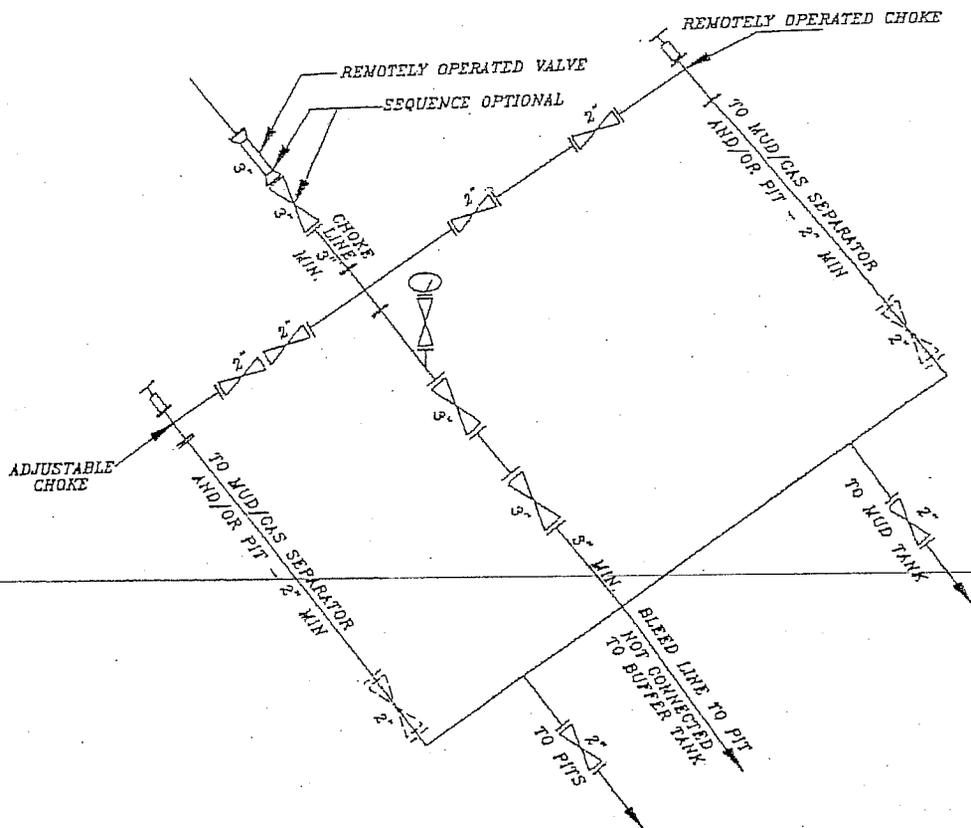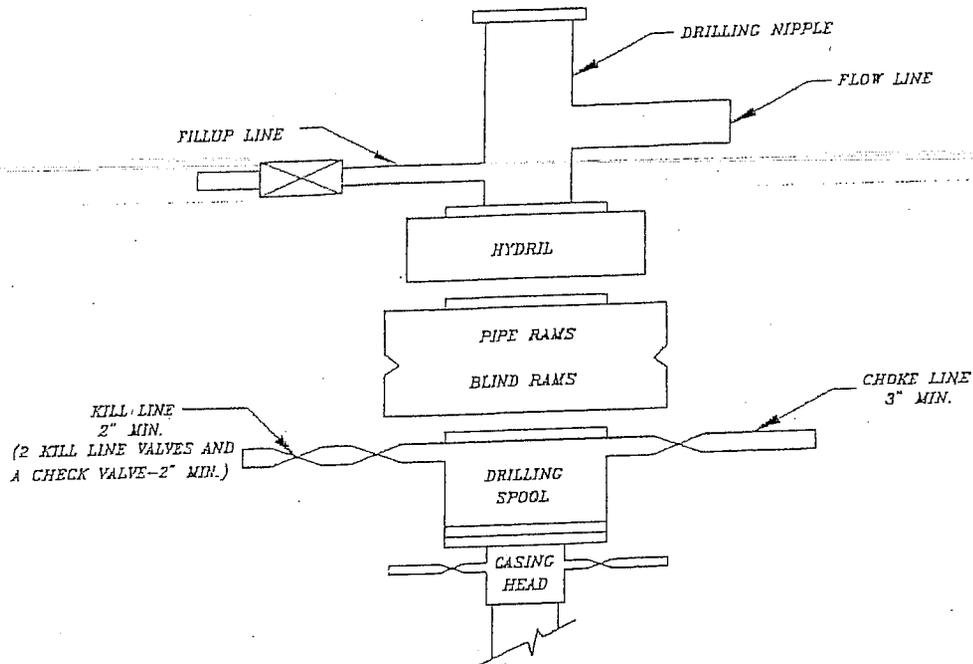

**BONANZA 1023-17G  
SW/NE SECTION 17, T10S, R23E  
UINTAH COUNTY, UTAH  
UTU-37355**

**ONSHORE ORDER NO. 1**

***MULTI-POINT SURFACE USE & OPERATIONS PLAN***

**1. Existing Roads:**

Directions to the proposed location are attached.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

**2. Planned Access Roads:**

Approximately 0.1 +/- miles of new access roads is proposed. Refer to Topo Map B.

The access road will be crowned (2 to 3%), ditched and constructed with a running surface of 18 feet and a maximum disturbed width of 30 feet. Graveling or capping the roadbed will be performed as necessary to provide a well constructed, safe road. Prior to construction or upgrading, the proposed road shall be cleared of any snow and allowed to dry completely.

Surface disturbance and vehicular traffic will be limited to the proposed location and proposed access route. Any additional area needed will be approved in advance. All construction shall be in conformance with the standards outlined in the BLM and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development. 1989.

The road surface and shoulders will be kept in a safe and usable condition and will be maintained in accordance with the original construction standards. All drainage ditches will be kept clear and free-flowing and will be maintained according to original construction standards. The access road surface will be kept free of trash during operations. All traffic will be confined to the approved disturbed surface. Road drainage crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing or shall the drainages be blocked by the road bed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Should mud holes develop, they shall be filled in and detours around them avoided. When snow is removed from the road during the winter months, the snow shall be pushed outside of the borrow ditches, and the turnouts kept clear so that snowmelt will be channeled away from the road.

**3. Location of Existing Wells Within a 1-Mile Radius**

Please refer to Topo Map C.

**4. Location of Existing & Proposed Facilities & Pipelines**

*The following guidelines will apply if the well is productive.*

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The requested color is Carlsbad Canyon (2.5 Y 6/2) as determined during the on-site inspection.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

**Variations to Best Management Practices (BMP) Requests:**

Approximately 322' of 4" steel pipeline. Please refer to the Topo Map D. The pipeline will be butt-welded together.

The pipeline shall be installed on surface within access corridor for the well location. As a Best Management Practice (BMP), the pipeline would be buried within the access road corridor if possible. The construction of pipelines requires the corridor of 30 feet.

This exception to the BMP should be granted by the BLM Authorized Officer because indurated bedrock, such as sandstone, is at or within 2 feet of the surface and the soil has a poor history for successful rehabilitation.

**5. Location and Type of Water Supply:**

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec.32, T4S,R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

**6. Source of Construction Materials**

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

7. **Methods of Handling Waste Materials**

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge of liquids.

A plastic reinforced liner is to be used as discussed during on-site inspection. It will be a minimum of 20 mil thick and felt with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

*Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec. 35, T9S, R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E. (Request is in lieu of filing Form 3160-5, after initial production).*

8. **Ancillary Facilities**

None are anticipated.

9. **Well Site Layout:** (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

The net wire shall be no more than two inches above the ground. The barbed wire shall be three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

10. **Plans for Reclamation of the Surface:**

*Producing Location:*

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water (s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling, and recontouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

*Dry Hole/Abandoned Location:*

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations.

When the pit is backfilled, the topsoil pile shall be spread on the location up to the rig anchor points. The location will be reshaped to the original contour to the extent possible. The following seed mixture will be used to reclaim the surface for interim reclamation using appropriate reclamation methods. A total of 12 lbs/acre will be used if the seeds are drilled (24 lbs/acre if the seeds are broadcast). The per acre requirements for drilled seeds are:

Crested Wheatgrass	4 lbs.
Needle and Thread Grass	4 lbs
Indian Rice Grass	4 lbs.

The operator shall call BLM for the seed mixture when final reclamation occurs.

**11. Surface Ownership:**

United States of America  
Bureau of Land Management  
170 South 500 East  
Vernal, UT 84078  
(435) 781-4400

**12. Other Information:**

A Class III Archaeological Report has been performed and completed on April 27, 2005, the Archaeological Report No. 05-114.  
Paleontological Reconnaissance Report will be submitted when report becomes available.

**WILDLIFE STIPULATIONS:**

**CRITICAL WILDLIFE HABITAT:** No construction or drilling activity May 10<sup>th</sup> – July 15<sup>th</sup>.  
Submit a letter to the BLM requesting a stipulation waiver.

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance. The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

13. Lessee's or Operators's Representative & Certification:

Sheila Upchego  
Regulatory Analyst  
Kerr-McGee Oil & Gas Onshore LP  
1368 South 1200 East  
Vernal, UT 84078  
(435) 781-7024

Randy Bayne  
Drilling Manager  
Kerr-McGee Oil & Gas Onshore LP  
1368 South 1200 East  
Vernal, UT 84078  
(435)781-7018

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Kerr-McGee Oil & Gas Onshore LP is considered to be the operator of the subject well. Westport Oil & Gas Company agrees to be responsible under the terms and the conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for the lease activities is being provided by BLM Nationwide Bond #2971100-2533.

I hereby certify that the proposed drill site and access route has been inspected and that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

  
Sheila Upchego

May 31, 2006  
Date

**Kerr-McGee Oil & Gas Onshore LP**  
**BONANZA #1023-17G**  
**SECTION 17, T10S, R23E, S.L.B.&M.**

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 0.3 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 12.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 1.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 1.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 0.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 3.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN RIGHT AND PROCEED IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 0.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 5.1 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN LEFT AND PROCEED IN A SOUTHEASTERLY, THEN NORTHEASTERLY DIRECTION APPROXIMATELY 0.4 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN RIGHT AND PROCEED IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 0.8 MILES TO THE BEGINNING OF THE PROPOSED ACCESS FOR THE #1023-17H TO THE SOUTH; FOLLOW ROAD FLAGS IN A SOUTHERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE #1023-17H AND THE BEGINNING OF THE PROPOSED ACCESS FOR THE #1023-17K TO THE SOUTHWEST; FOLLOW ROAD FLAGS IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 200' TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTHWEST; FOLLOW ROAD FLAGS IN A NORTHWESTERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 0.1 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 58.8 MILES.

# Kerr-McGee Oil & Gas Onshore LP

BONANZA #1023-17G  
LOCATED IN UINTAH COUNTY, UTAH  
SECTION 17, T10S, R23E, S.L.B.&M.

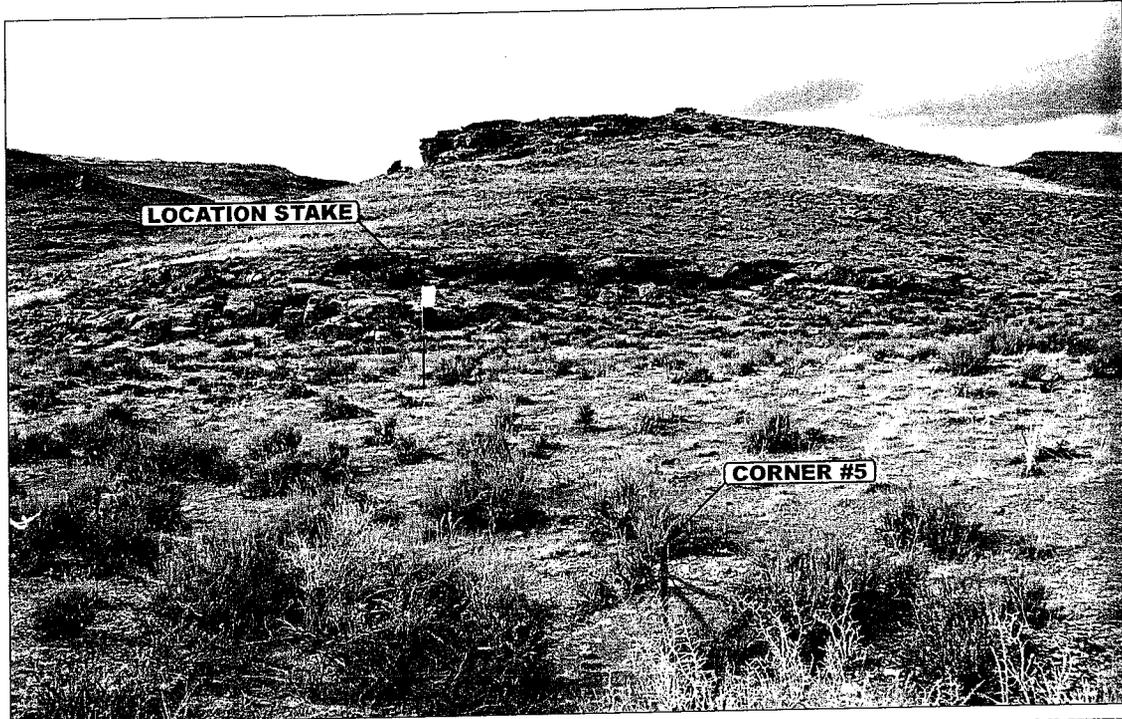


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHWESTERLY



- Since 1964 -

**U E L S** Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS


03 11 06  
MONTH DAY YEAR

PHOTO

TAKEN BY: J.R. | DRAWN BY: B.C. | REVISED: 00-00-00



T10S

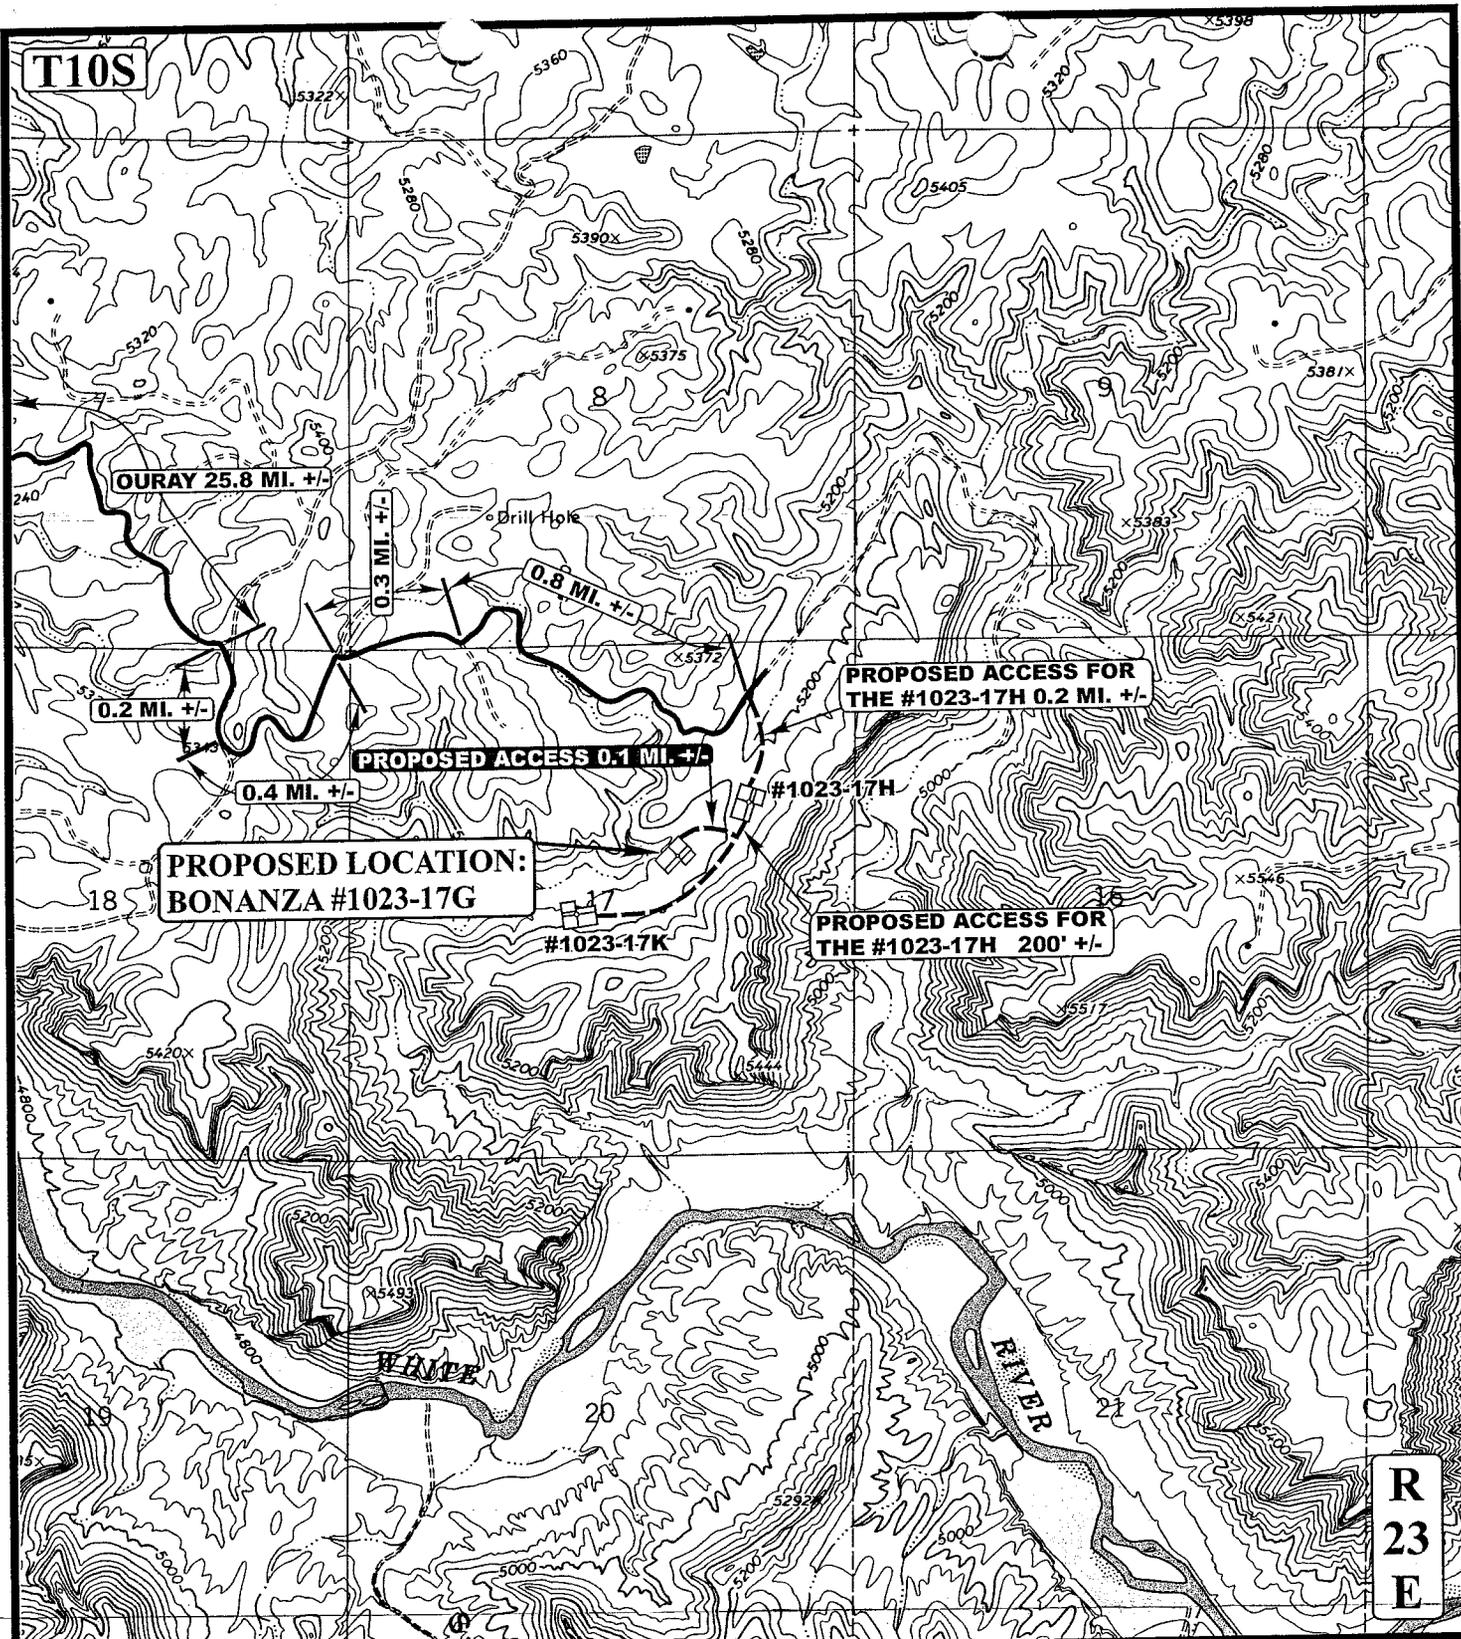

PROPOSED ACCESS FOR THE #1023-17H 0.2 MI. +/-

PROPOSED ACCESS 0.1 MI. +/-

PROPOSED LOCATION: BONANZA #1023-17G

PROPOSED ACCESS FOR THE #1023-17H 200' +/-

R  
23  
E

**LEGEND:**

- EXISTING ROAD
- - - - - PROPOSED ACCESS ROAD



**Kerr-McGee Oil & Gas Onshore LP**

**BONANZA #1023-17G**  
**SECTION 17, T10S, R23E, S.L.B.&M.**  
**2208' FNL 1850' FEL**




**Utah Engineering & Land Surveying**  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC** 03 10 06  
**MAP** MONTH DAY YEAR  
 SCALE: 1" = 2000' DRAWN BY: B.C. REVISED: 00-00-00

**B**  
**TOPO**

T10S

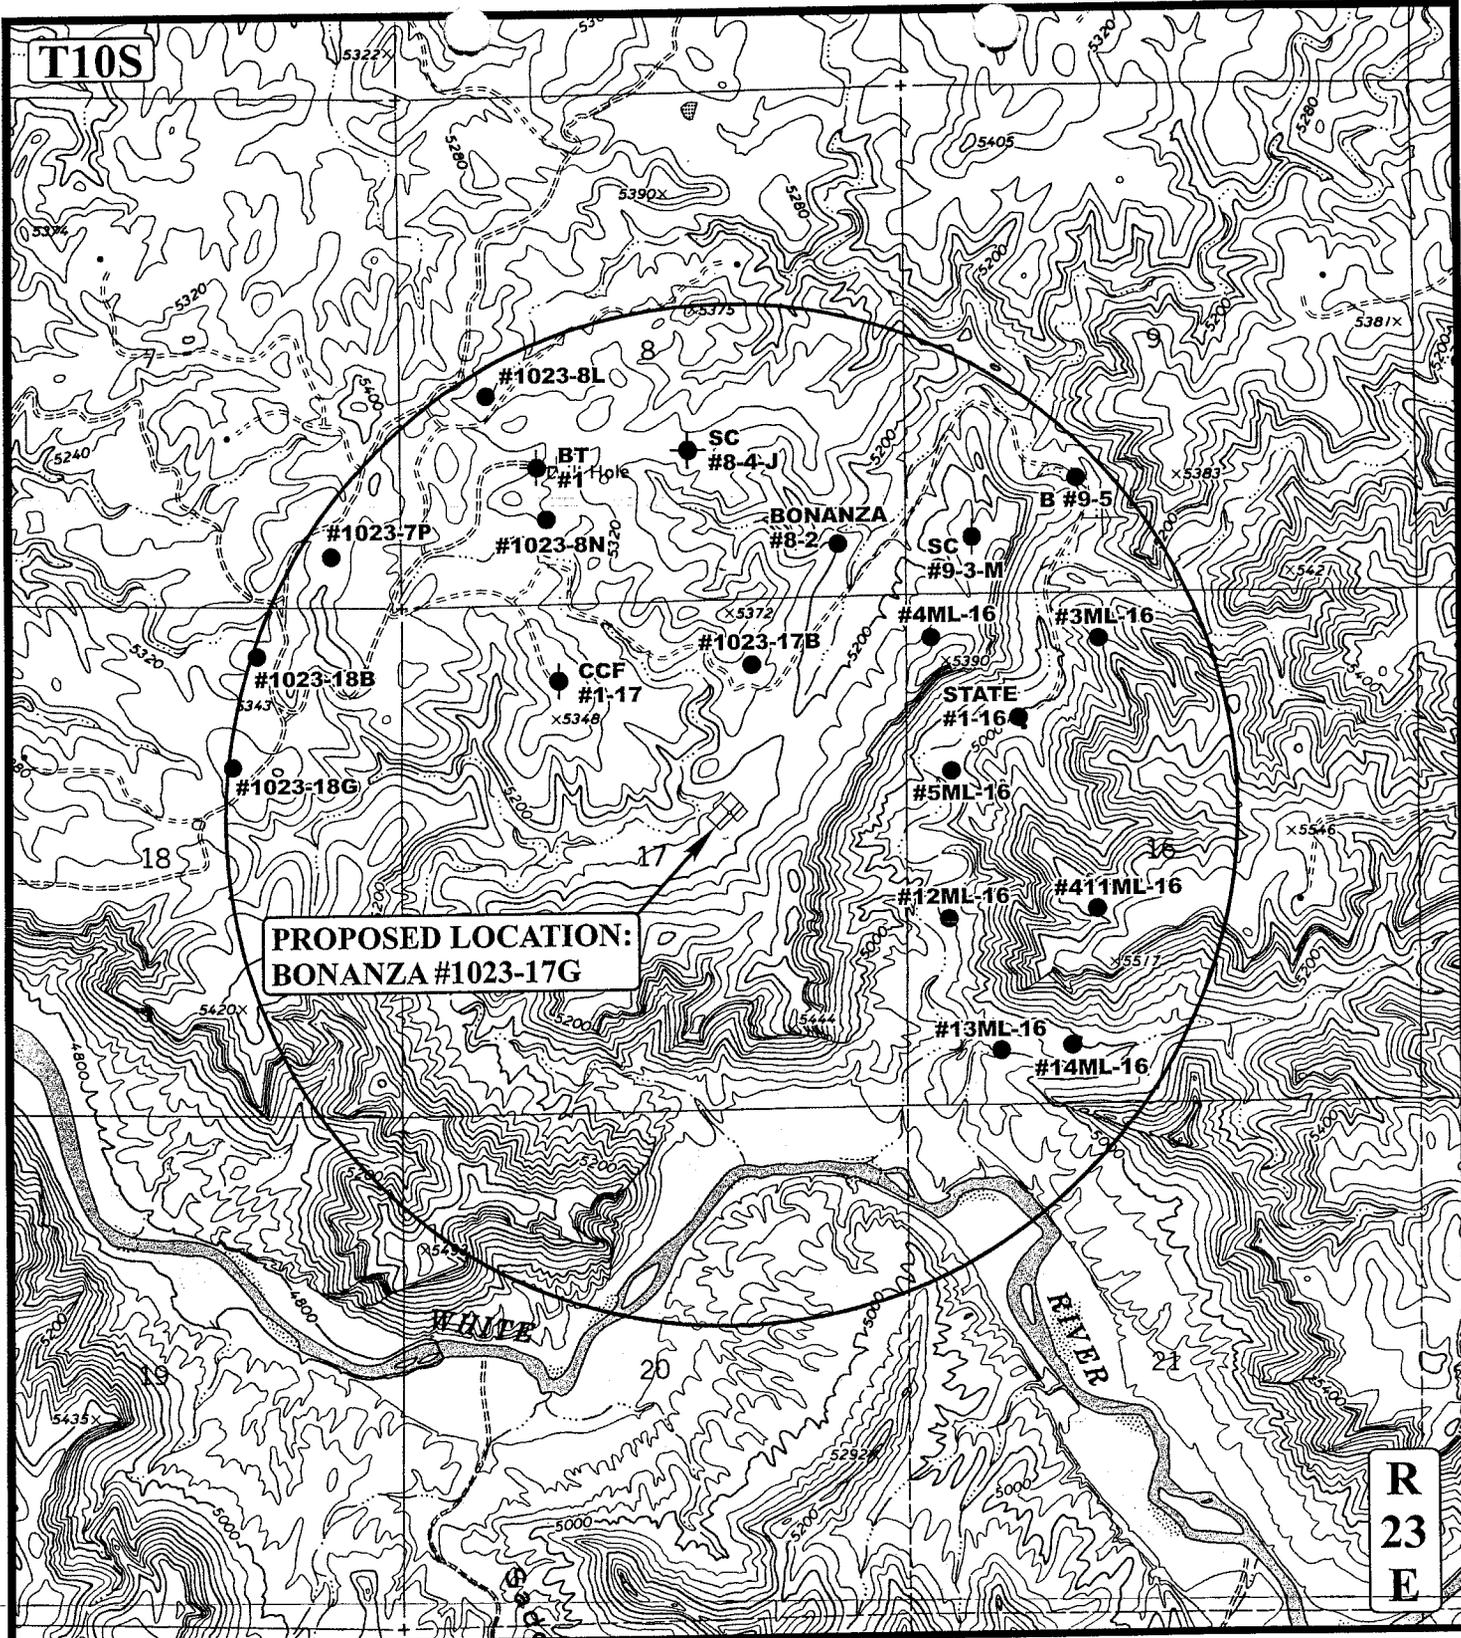

PROPOSED LOCATION:  
BONANZA #1023-17G

R  
23  
E

**LEGEND:**

- DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED

**Kerr-McGee Oil & Gas Onshore LP**

**BONANZA #1023-17G**  
**SECTION 17, T10S, R23E, S.L.B.&M.**  
**2208' FNL 1850' FEL**

**U&Ls**  
**Uintah Engineering & Land Surveying**  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813



TOPOGRAPHIC MAP	03	10	06	C TOPO
	MONTH	DAY	YEAR	
SCALE: 1" = 2000'	DRAWN BY: B.C.		REVISED: 00-00-00	

T10S

Drill Hole

5320

X5372

5200

X5390

EXISTING PIPELINE

X5348

PROPOSED ACCESS ROAD

PROPOSED PIPELINE FOR THE #1023-17H

PROPOSED LOCATION: BONANZA #1023-17G

#1023-17H

PROPOSED PIPELINE

PROPOSED PIPELINE FOR THE #1023-17K

#1023-17K

TIE-IN POINT

5200

5200

5444

R 23 E

APPROXIMATE TOTAL PIPELINE DISTANCE = 322' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- PROPOSED PIPELINE
- PROPOSED PIPELINE (SERVICING OTHER WELLS)



Kerr-McGee Oil & Gas Onshore LP

BONANZA #1023-17G  
SECTION 17, T10S, R23E, S.L.B.&M.  
2208' FNL 1850' FEL



Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813

TOPOGRAPHIC MAP  
03 10 06  
MONTH DAY YEAR  
SCALE: 1" = 1000' DRAWN BY: B.C. REVISED: 00-00-00

D  
TOPO

# Kerr-McGee Oil & Gas Onshore LP

BONANZA #1023-17G

PIPELINE ALIGNMENT

LOCATED IN UINTAH COUNTY, UTAH

SECTION 17, T10S, R23E, S.L.B.&M.

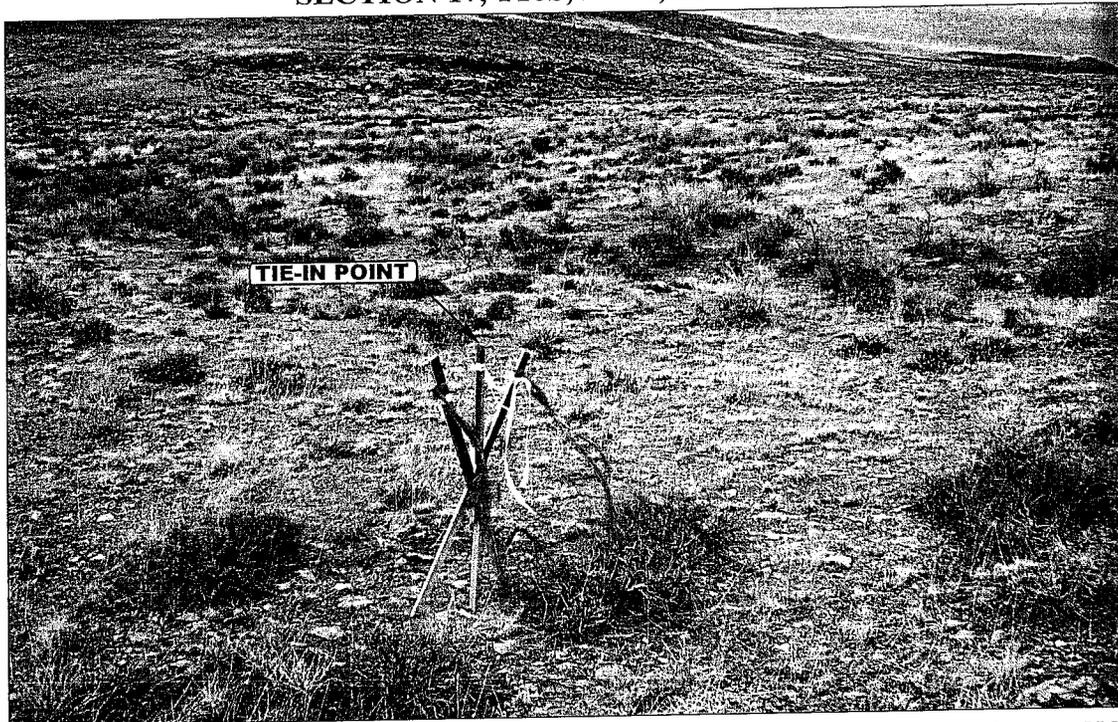


PHOTO: VIEW OF TIE-IN POINT

CAMERA ANGLE: NORTHERLY

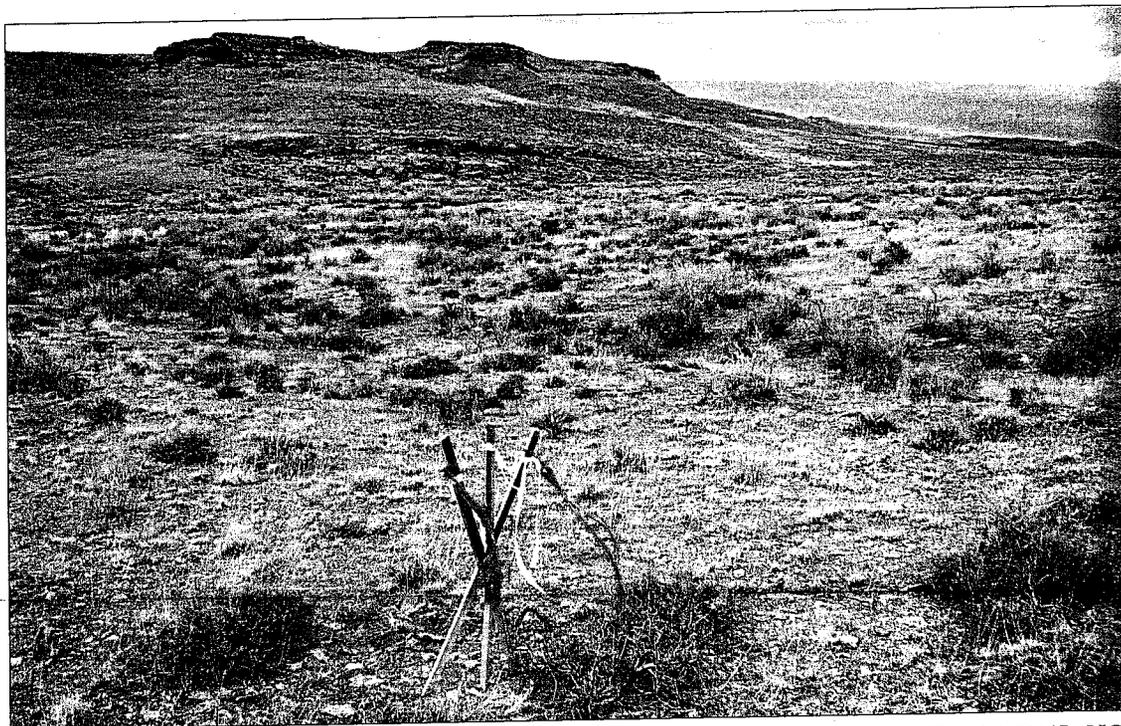


PHOTO: VIEW OF PIPELINE ALIGNMENT

CAMERA ANGLE: NORTHERLY



- Since 1964 -

**UELS** Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
435-789-1017 uels@uelsinc.com

PIPELINE PHOTOS

03  
MONTH

11  
DAY

06  
YEAR

PHOTO

TAKEN BY: J.R.

DRAWN BY: B.C.

REVISED: 00-00-00


LOCATION LAYOUT FOR

BONANZA #1023-17G

SECTION 17, T10S, R23E, S.L.B.&M.



C-1.5' 2208' FNL 1850' FEL  
El. 81.6'

F-9.8'  
El. 70.3'

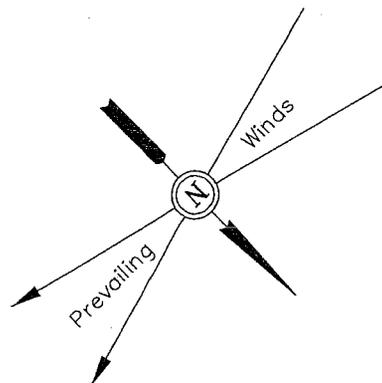

SCALE: 1" = 50'  
DATE: 03-08-06  
Drawn By: C.H.

NOTE:  
Flare Pit is to be located a min. of 100' from the Well Head.

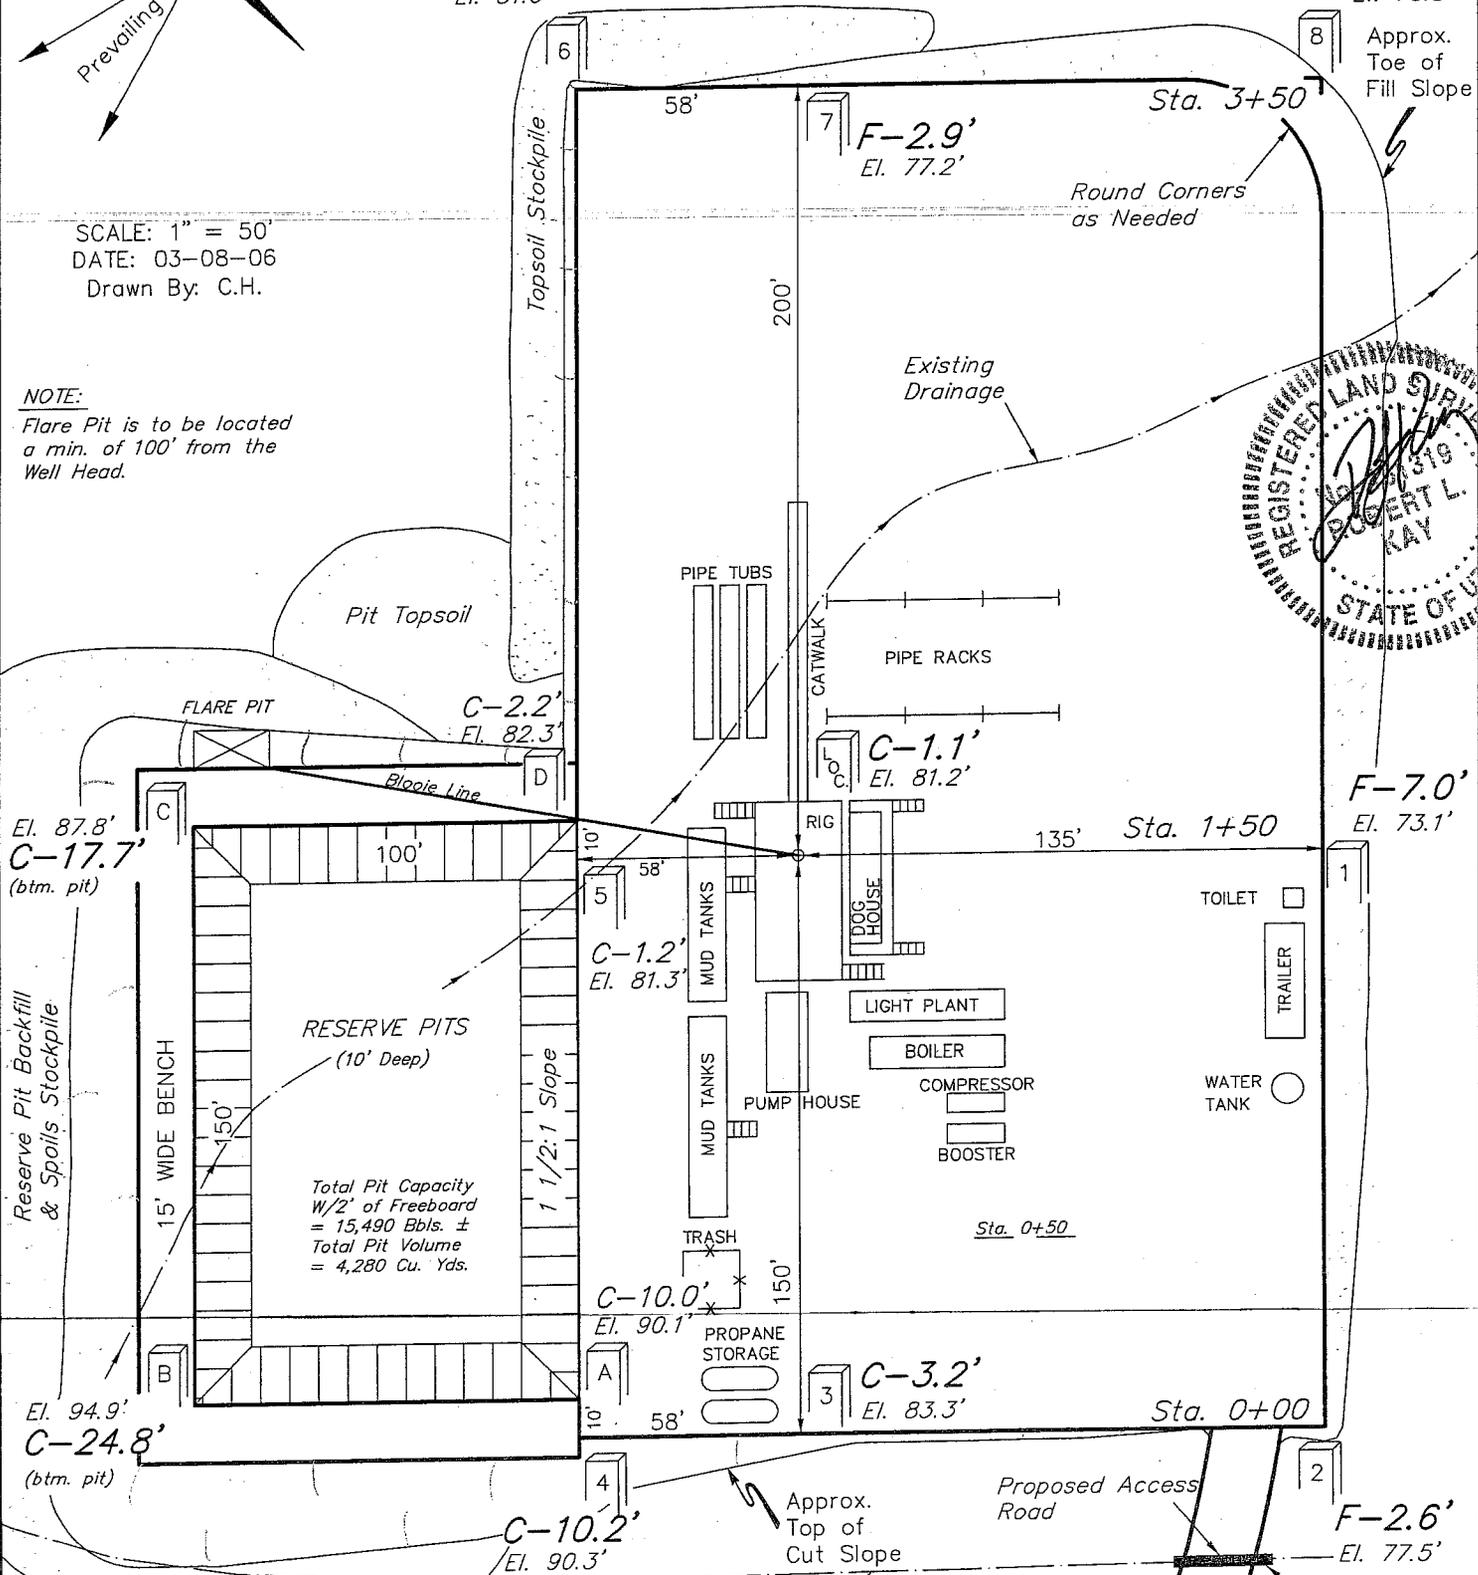

NOTES:  
Elev. Ungraded Ground At Loc. Stake = 5181.2'  
FINISHED GRADE ELEV. AT LOC. STAKE = 5180.1'

CONSTRUCT DIVERSION DITCH

UINTEH ENGINEERING & LAND SURVEYING  
85 So. 200 East \* Vernal, Utah 84078 \* (435) 789-1017



Kerr-McGee Oil & Gas Onshore

FIGURE #2

TYPICAL CROSS SECTIONS FOR  
 BONANZA #1023-17G  
 SECTION 17, T10S, R23E, S.L.B.&M.  
 2208' FNL 1850' FEL

1" = 20'  
 X-Section  
 Scale  
 1" = 50'

DATE: 03-08-06  
 Drawn By: C.H.

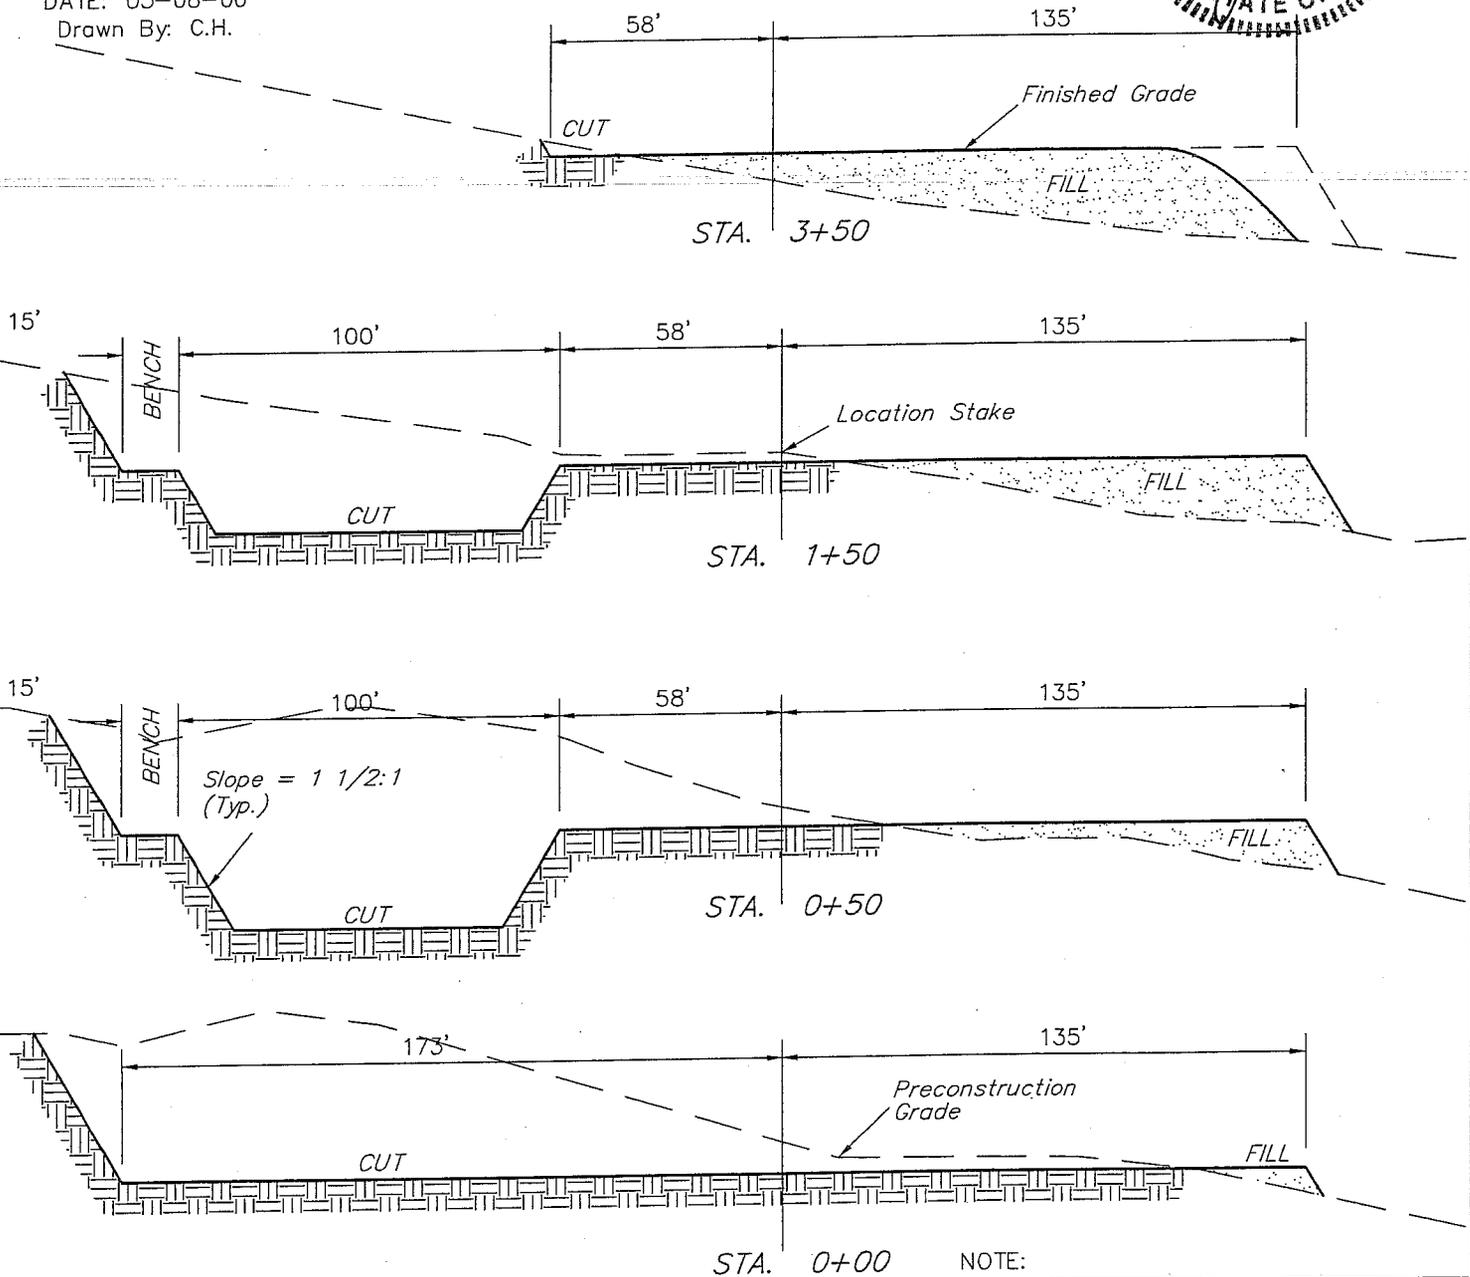

\* NOTE:  
 FILL QUANTITY INCLUDES  
 5% FOR COMPACTION

NOTE:  
 Topsoil should not be  
 Stripped Below Finished  
 Grade on Substructure Area.

APPROXIMATE YARDAGES

CUT  
 (6") Topsoil Stripping = 1,990 Cu. Yds.  
 Remaining Location = 14,120 Cu. Yds.

EXCESS MATERIAL = 6,080 Cu. Yds.  
 Topsoil & Pit Backfill = 4,130 Cu. Yds.  
 (1/2 Pit Vol.)  
 EXCESS UNBALANCE = 1,950 Cu. Yds.  
 (After Interim Rehabilitation)

TOTAL CUT = 16,110 CU.YDS.  
 FILL = 10,030 CU.YDS.

UINTAH ENGINEERING & LAND SURVEYING  
 85 So. 200 East \* Vernal, Utah 84078 \* (435) 789-1017

**WORKSHEET  
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 06/05/2006

API NO. ASSIGNED: 43-047-38236

WELL NAME: BONANZA 1023-17G  
 OPERATOR: KERR-MCGEE OIL & GAS ( N2995 )  
 CONTACT: SHEILA UPCHEGO

PHONE NUMBER: 435-781-7024

PROPOSED LOCATION:

SWNE 17 100S 230E  
 SURFACE: 2208 FNL 1850 FEL  
 BOTTOM: 2208 FNL 1850 FEL  
 COUNTY: UINTAH  
 LATITUDE: 39.95007 LONGITUDE: -109.3473  
 UTM SURF EASTINGS: 641186 NORTHINGS: 4423313  
 FIELD NAME: NATURAL BUTTES ( 630 )

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal  
 LEASE NUMBER: UTU-37355  
 SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: WSMVD  
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]  
(No. 2971100-2533 )
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit  
(No. 43-8496 )
- RDCC Review (Y/N)  
(Date: \_\_\_\_\_ )
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)

LOCATION AND SITING:

- \_\_\_\_\_ R649-2-3.
- Unit: \_\_\_\_\_
- \_\_\_\_\_ R649-3-2. General  
Siting: 460 From Qtr/Qtr & 920' Between Wells
- \_\_\_\_\_ R649-3-3. Exception
- Drilling Unit  
Board Cause No: 179-12  
Eff Date: 7-5-05  
Siting: 460' except 240' & 920' from other Wells.
- \_\_\_\_\_ R649-3-11. Directional Drill

COMMENTS: \_\_\_\_\_


\_\_\_\_\_

\_\_\_\_\_

STIPULATIONS: 1 - Federal Approval

\_\_\_\_\_

\_\_\_\_\_

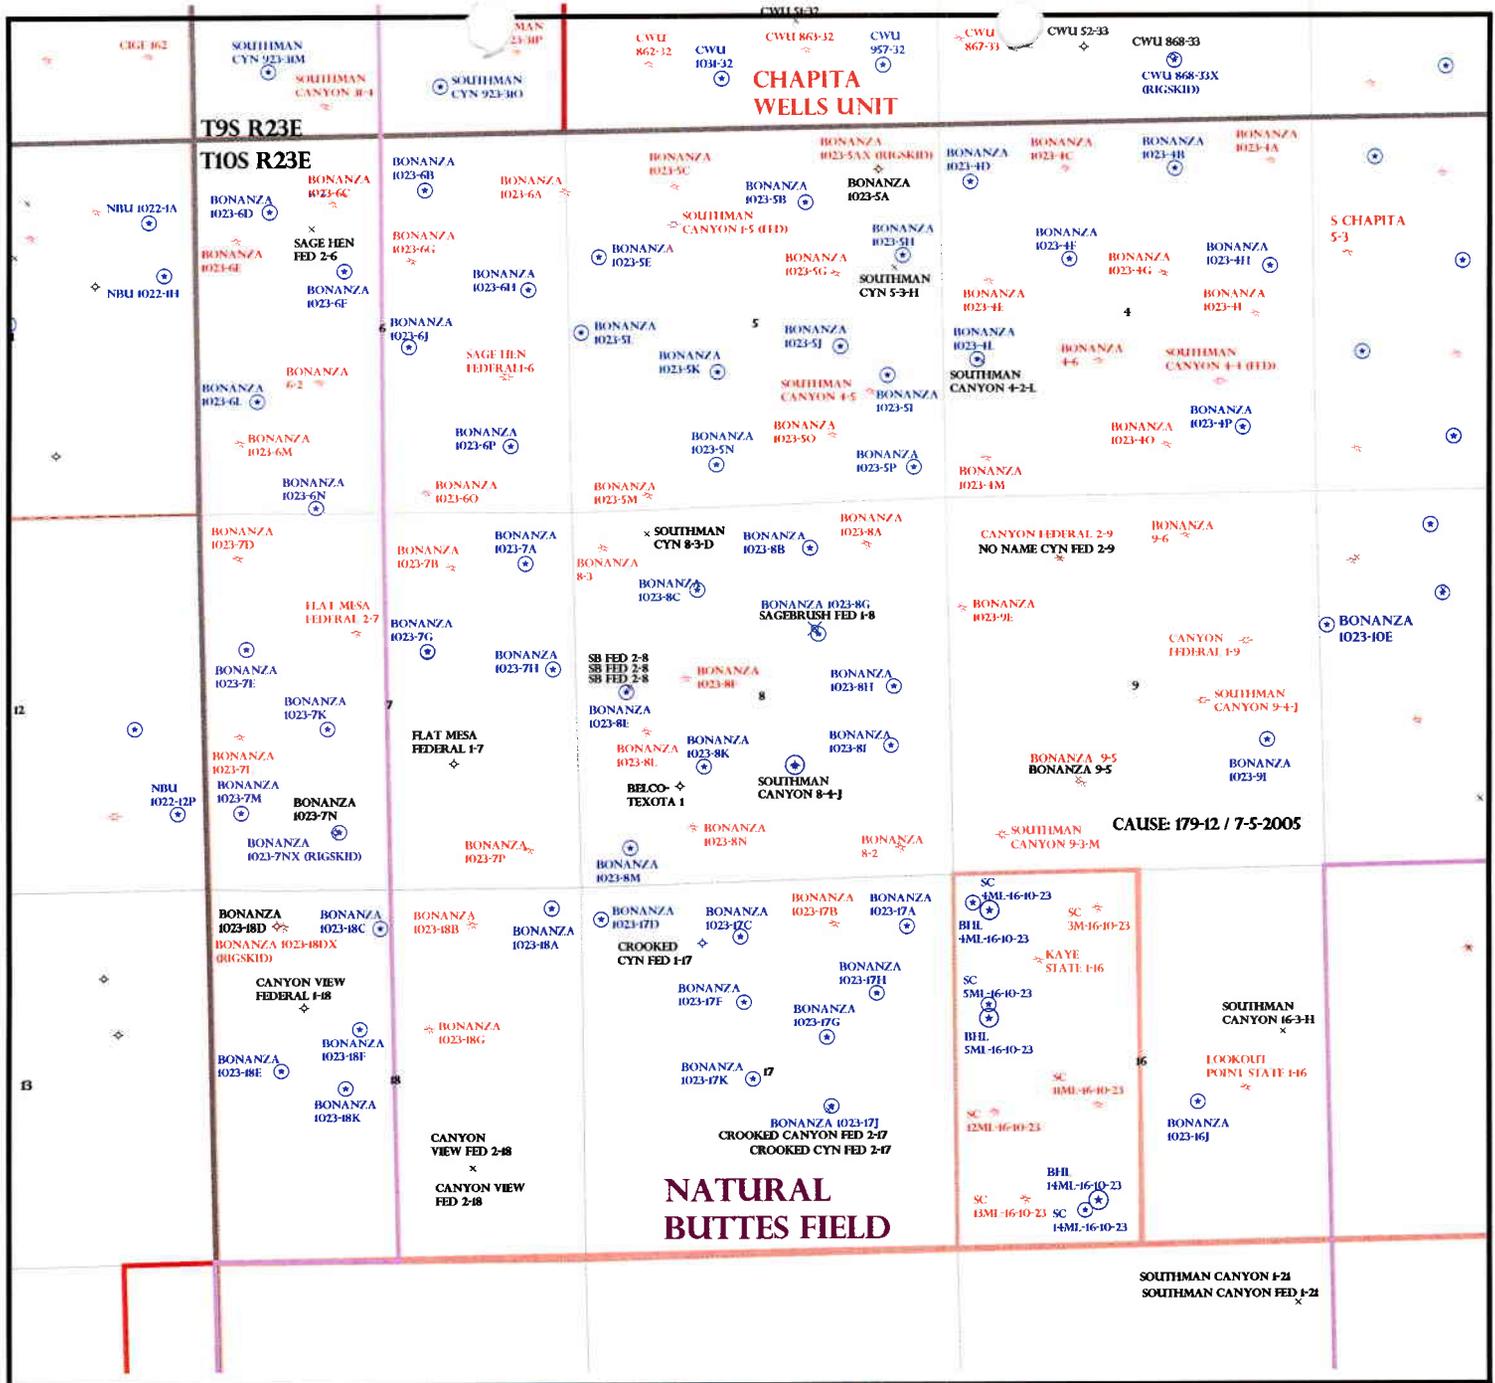

OPERATOR: KERR MCGEE O&G (N2995)

SEC: 4,5,8,9,17,18 T. 10S R. 23E

FIELD: NATURAL BUTTES (630)


COUNTY: UINTAH

CAUSE: 179-12 / 7-5-2005

- Field Status**
- ABANDONED
  - ACTIVE
  - COMBINED
  - INACTIVE
  - PROPOSED
  - STORAGE
  - TERMINATED

- Unit Status**
- EXPLORATORY
  - GAS STORAGE
  - NF PP OIL
  - NF SECONDARY
  - PENDING
  - PI OIL
  - PP GAS
  - PP GEOTHERML
  - PP OIL
  - SECONDARY
  - TERMINATED

- Wells Status**
- \* GAS INJECTION
  - \* GAS STORAGE
  - X LOCATION ABANDONED
  - \* NEW LOCATION
  - X PLUGGED & ABANDONED
  - \* PRODUCING GAS
  - \* PRODUCING OIL
  - \* SHUT-IN GAS
  - \* SHUT-IN OIL
  - X TEMP. ABANDONED
  - \* TEST WELL
  - \* WATER INJECTION
  - \* WATER SUPPLY
  - \* WATER DISPOSAL
  - \* DRILLING



Utah Oil Gas and Mining



PREPARED BY: DIANA WHITNEY  
DATE: 14-JUNE-2006



**State of Utah**

**Department of  
Natural Resources**

MICHAEL R. STYLER  
*Executive Director*

**Division of  
Oil, Gas & Mining**

JOHN R. BAZA  
*Division Director*

JON M. HUNTSMAN, JR.  
*Governor*

GARY R. HERBERT  
*Lieutenant Governor*

June 15, 2006

Kerr-McGee Oil & Gas Onshore LP  
1368 S 1200 E  
Vernal, UT 84078

Re: Bonanza 1023-17G Well, 2208' FNL, 1850' FEL, SW NE, Sec. 17, T. 10 South,  
R. 23 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-38236.

Sincerely,

Gil Hunt  
Associate Director

pab  
Enclosures

cc: Uintah County Assessor  
Bureau of Land Management, Vernal District Office

**Operator:** Kerr-McGee Oil & Gas Onshore LP  
**Well Name & Number** Bonanza 1023-17G  
**API Number:** 43-047-38236  
**Lease:** UTU-37355

**Location:** SW NE                      **Sec.** 17                      **T.** 10 South                      **R.** 23 East

**Conditions of Approval**

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.  
UTU-37355

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

8. Well Name and No.  
**BONANZA 1023-17G**

9. API Well No.  
**43-047-38236**

10. Field and Pool, or Exploratory Area  
**NATURAL BUTTES**

11. County or Parish, State  
**UINTAH COUNTY, UTAH**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
**KERR-McGEE OIL & GAS ONSHORE LP**

3a. Address  
**1368 SOUTH 1200 EAST VERNAL, UT 84078**

3b. Phone No. (include area code)  
**(435) 781-7024**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**SWNE SEC 17, T10S, R23E 2208'FNL, 1850'FEL**

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize <input type="checkbox"/> Deepen <input type="checkbox"/> Production (Start/Resume) <input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing <input type="checkbox"/> Fracture Treat <input type="checkbox"/> Reclamation <input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair <input type="checkbox"/> New Construction <input type="checkbox"/> Recomplete <input checked="" type="checkbox"/> Other <b>REVISED</b>
	<input checked="" type="checkbox"/> Change Plans <input type="checkbox"/> Plug and Abandon <input type="checkbox"/> Temporarily Abandon <b>LOCATION LAYOUT</b>
	<input type="checkbox"/> Convert to Injection <input type="checkbox"/> Plug Back <input type="checkbox"/> Water Disposal


13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

THE OPERATOR HAS CHANGED THE LOCATION LAYOUT AND CUT SHEETS FOR THE SUBJECT WELL LOCATION.

PLEASE REFER TO THE REVISED LOCATION LAYOUT AND CUT SHEETS.

**RECEIVED**  
**JUN 26 2006**  
DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) <b>Sheila Upchego</b>	Title <b>Regulatory Analyst</b>
Signature 	Date <b>June 20, 2006</b>

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title <b>Accepted by the Utah Division of Oil, Gas and Mining</b>	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Federal Approval Of This Action Is Necessary

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



By: 

Kerr-McGee Oil & Gas Onshore LP

FIGURE #1


LOCATION LAYOUT FOR

BONANZA #1023-17G  
SECTION 17, T10S, R23E, S.L.B.&M.  
2208' FNL 1850' FEL

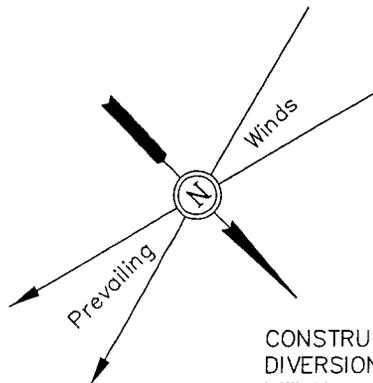

SCALE: 1" = 50'  
DATE: 03-08-06  
Drawn By: C.H.  
REVISED: 05-25-06

NOTE:  
Flare Pit is to be located  
a min. of 100' from the  
Well Head.

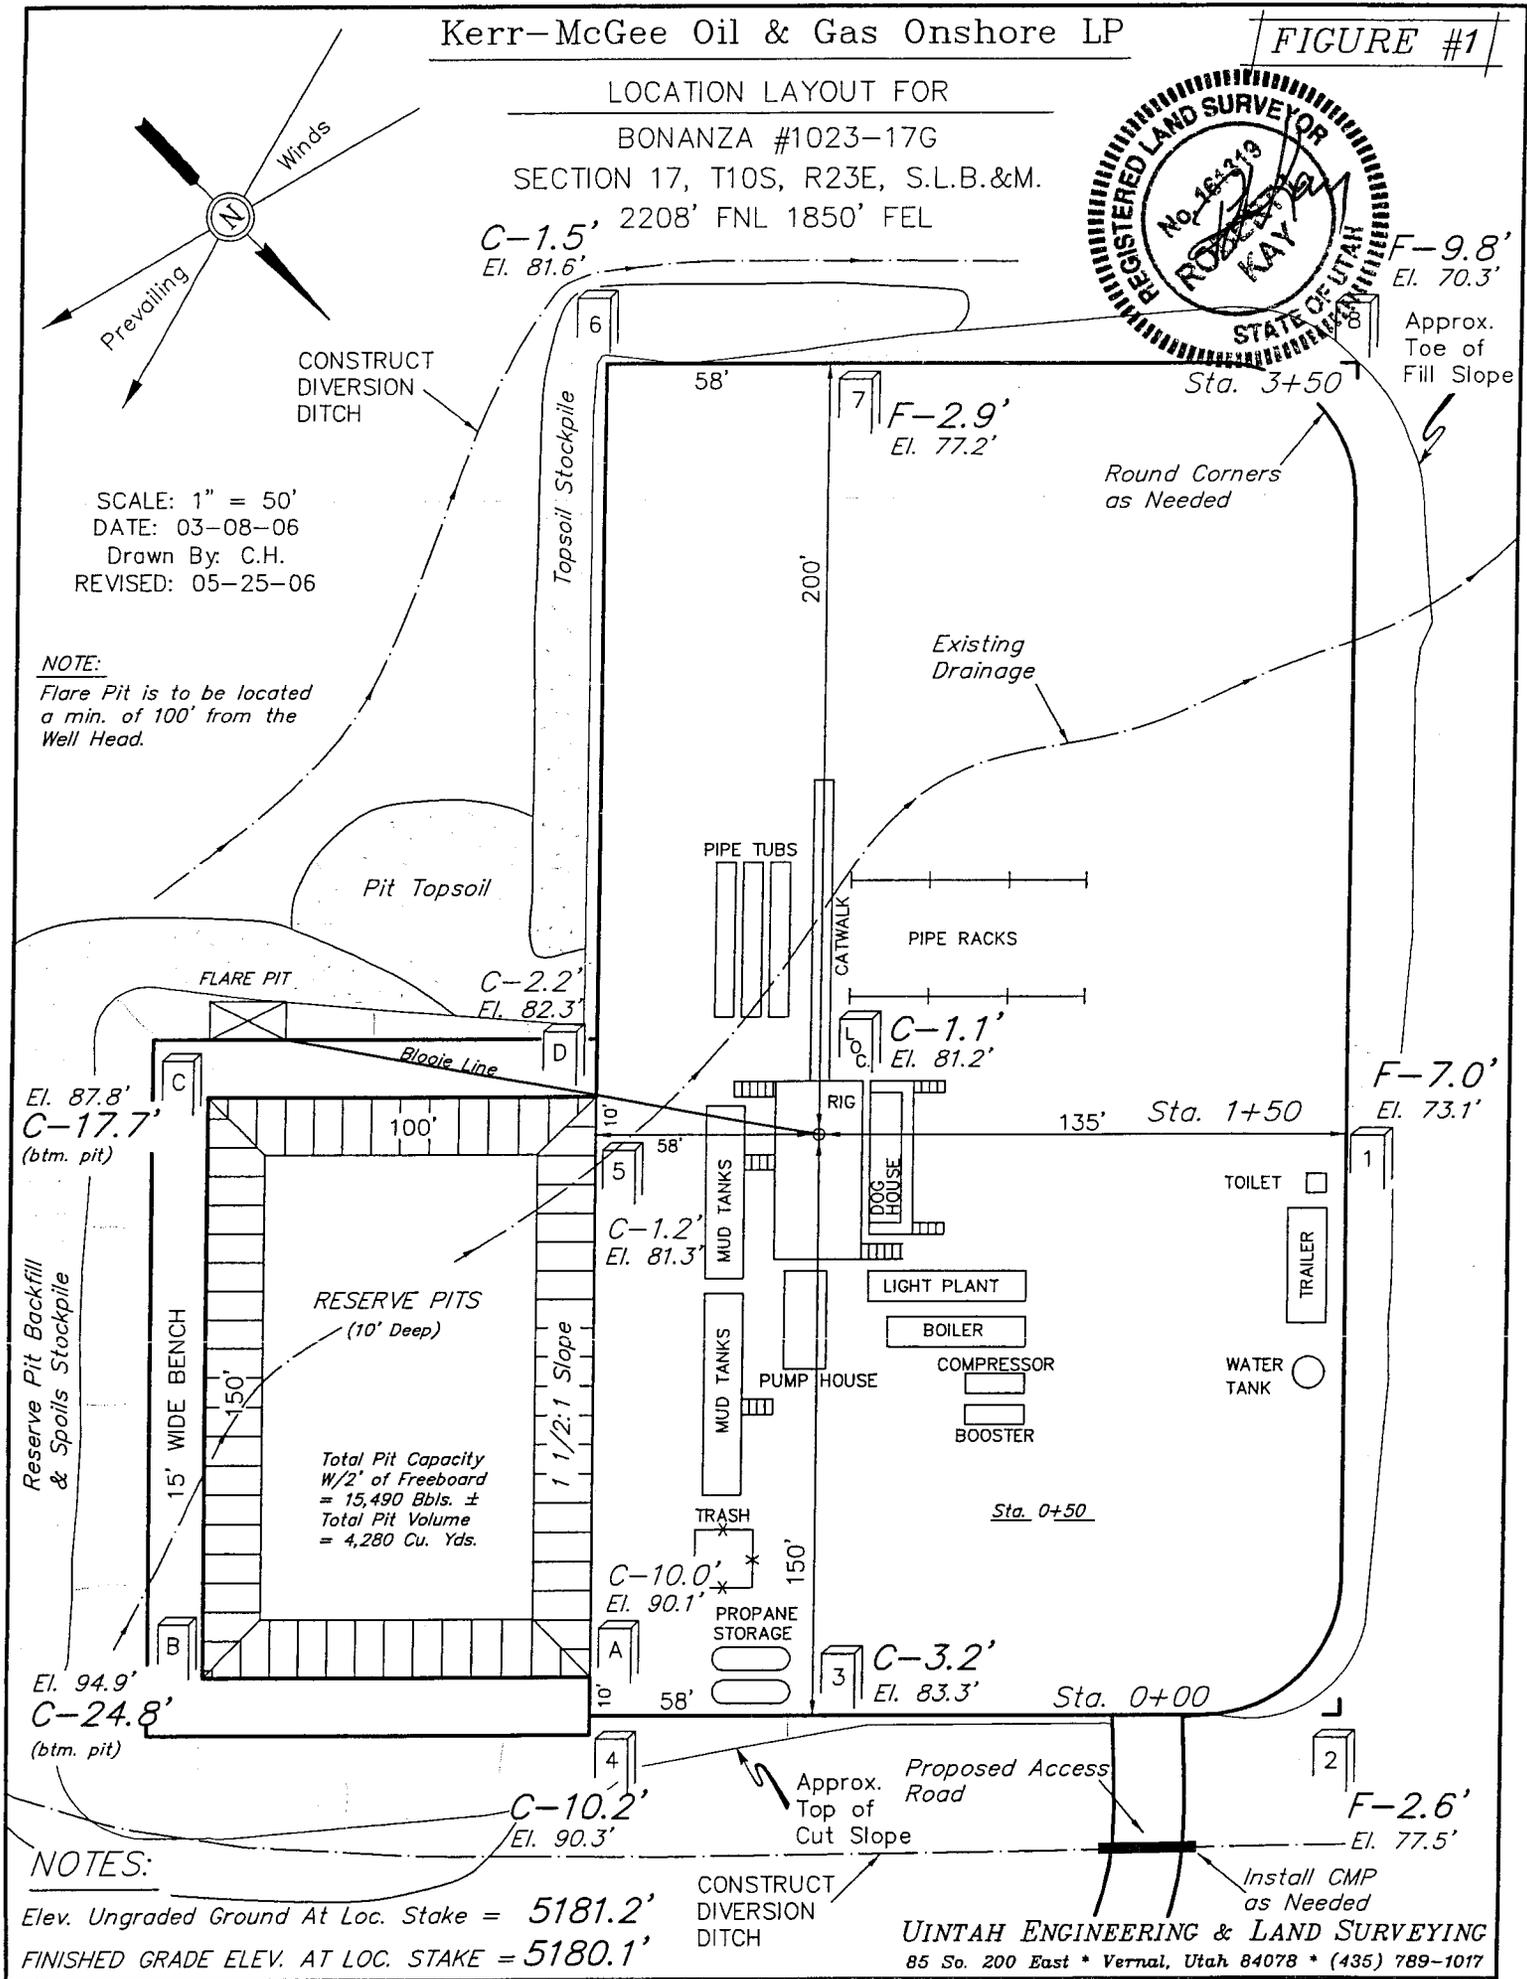

NOTES:

Elev. Ungraded Ground At Loc. Stake = 5181.2'  
FINISHED GRADE ELEV. AT LOC. STAKE = 5180.1'

CONSTRUCT  
DIVERSION  
DITCH

Install CMP  
as Needed  
UINTAH ENGINEERING & LAND SURVEYING  
85 So. 200 East \* Vernal, Utah 84078 \* (435) 789-1017


# Kerr-McGee Oil & Gas Onshore LP

TYPICAL CROSS SECTIONS FOR  
 BONANZA #1023-17G  
 SECTION 17, T10S, R23E, S.L.B.&M.  
 2208' FNL 1850' FEL



X-Section Scale  
 1" = 20'  
 1" = 50'

DATE: 03-08-06  
 Drawn By: C.H.  
 REVISED: 05-25-06

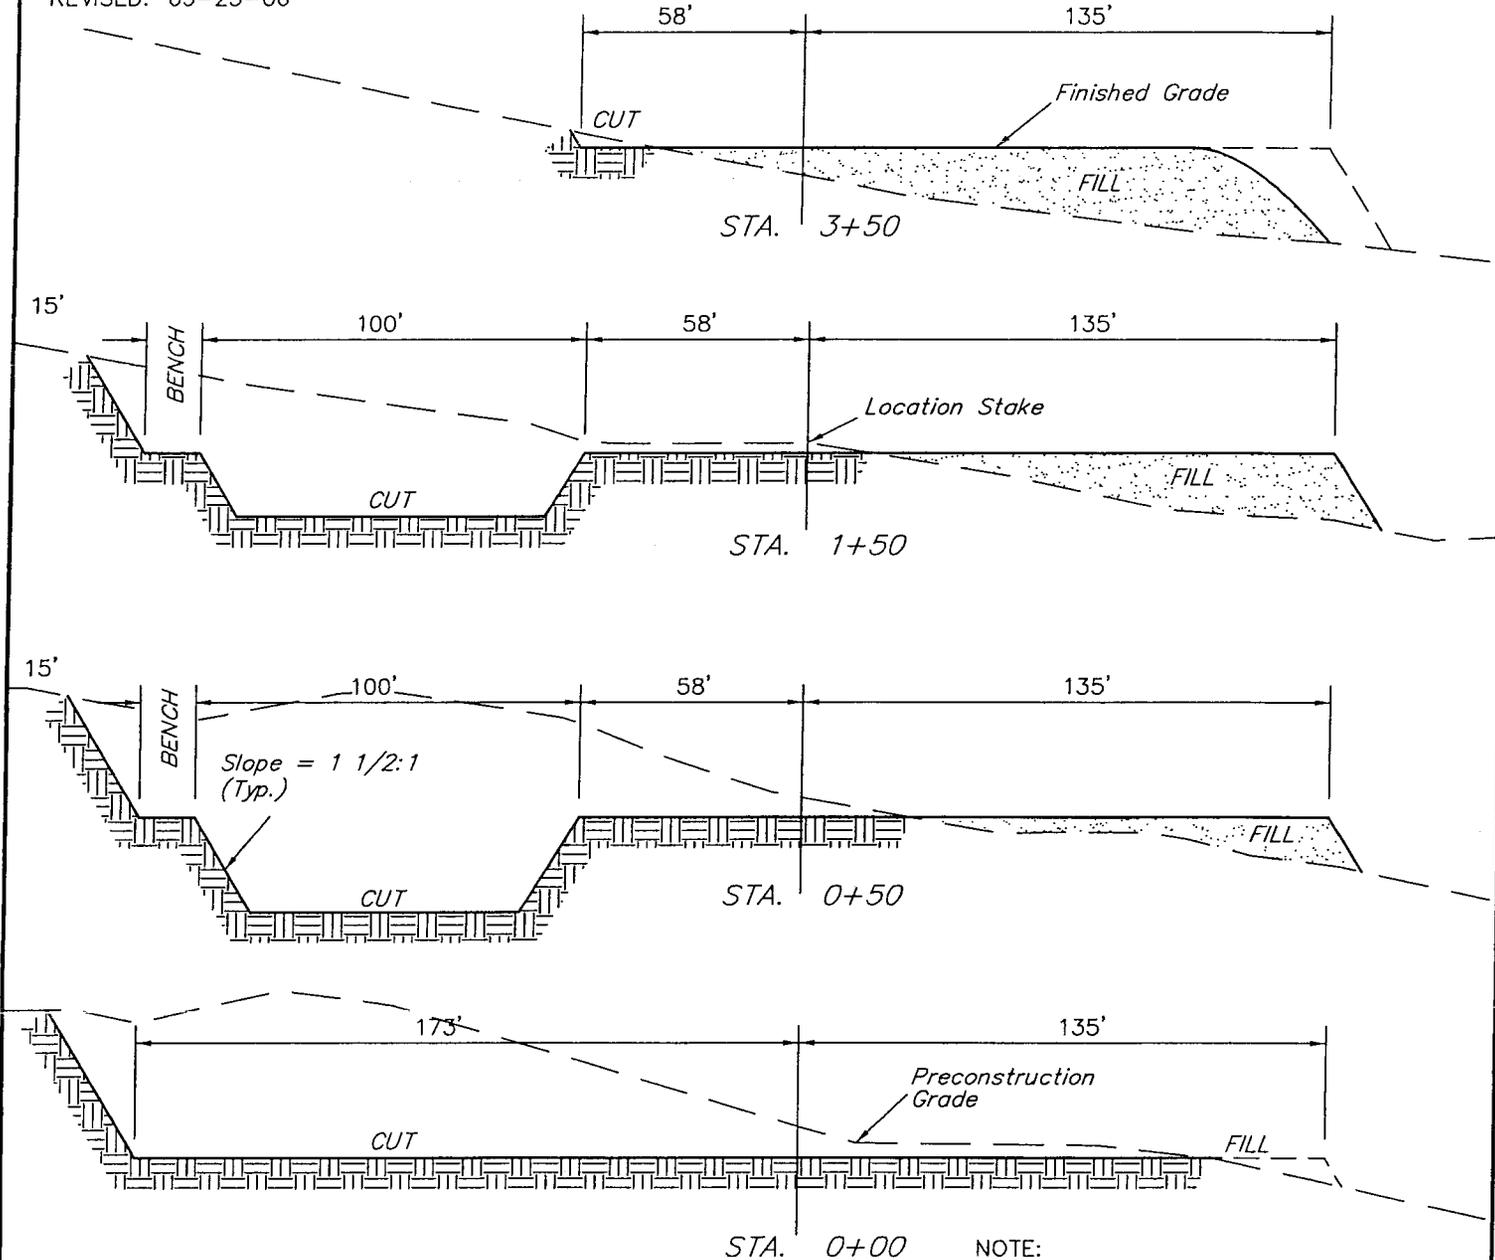

\* NOTE:  
 FILL QUANTITY INCLUDES  
 5% FOR COMPACTION

NOTE:  
 Topsoil should not be  
 Stripped Below Finished  
 Grade on Substructure Area.

APPROXIMATE YARDAGES

CUT		
(6") Topsoil Stripping	=	1,990 Cu. Yds.
Remaining Location	=	14,120 Cu. Yds.
<b>TOTAL CUT</b>	<b>=</b>	<b>16,110 CU.YDS.</b>
<b>FILL</b>	<b>=</b>	<b>10,030 CU.YDS.</b>

EXCESS MATERIAL	=	6,080 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	=	4,130 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	=	1,950 Cu. Yds.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

RECEIVED

JUN 01 2006

FORM APPROVED  
OMB No. 1004-0136  
Expires November 30, 2000

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. <b>UTU-37355</b>
b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator <b>KERR MCGEE OIL &amp; GAS ONSHORE LP</b>		7. If Unit or CA Agreement, Name and No.
3a. Address <b>1368 SOUTH 1200 EAST VERNAL, UT 84078</b>	3b. Phone No. (include area code) <b>(435) 781-7024</b>	8. Lease Name and Well No. <b>BONANZA 1023-17G</b>
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface <b>SWNE 2208'FNL, 1850'FEL</b>		9. API Well No. <b>43, DAT, 38236</b>
14. Distance in miles and direction from nearest town or post office* <b>27.8 MILES SOUTHEAST OF OURAY, UTAH</b>		10. Field and Pool, or Exploratory <b>NATURAL BUTTES</b>
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) <b>1850'</b>	16. No. of Acres in lease <b>1920.00</b>	11. Sec., T., R., M., or Blk, and Survey or Area <b>SECTION 17, T10S, R23E</b>
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. <b>REFER TO TOPO C</b>	19. Proposed Depth <b>7760'</b>	12. County or Parish <b>UINTAH</b>
21. Elevations (Show whether DF, KDB, RT, GL, etc.) <b>5181'GL</b>	20. BLM/BIA Bond No. on file <b>BOND NO. 2971100-2533</b>	13. State <b>UTAH</b>
22. Approximate date work will start*		23. Estimated duration

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- |   |   |
|---|---|
| 1. Well plat certified by a registered surveyor.  | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).   |
| 2. A Drilling Plan.   | 5. Operator certification.  |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized office. |

25. Signature 	Name (Printed/Typed) <b>SHEILA UPCHEGO</b>	Date <b>5/31/2006</b>
Title <b>REGULATORY ANALYST</b>		
Approved by (Signature) 	Name (Printed/Typed) <b>Terry Kavela</b>	Date <b>2-15-2007</b>
Title <b>Assistant Field Manager Lands &amp; Mineral Resources</b>	Office	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached. **CONDITIONS OF APPROVAL ATTACHED**

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on reverse)

NOTICE OF APPROVAL

RECEIVED

FEB 21 2007

DIV. OF OIL, GAS & MINING

06BM11357A  
UDOGM



**UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
VERNAL FIELD OFFICE**

**170 South 500 East      VERNAL, UT 84078      (435) 781-4400**



**CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL**

<b>Company:</b> Kerr-McGee O&G Onshore, LP	<b>Location:</b> SWNE, Sec 17, T10S, R23E
<b>Well No:</b> Bonanza 1023-17G	<b>Lease No:</b> UTU-37355
<b>API No:</b> 43-047-38236	<b>Agreement:</b> N/A

Petroleum Engineer:	Ryan Angus	Office: 435-781-4430	Cell: 435-828-
Petroleum Engineer:	James Ashley	Office: 435-781-4470	Cell: 435-828-7874
Petroleum Engineer:	Matt Baker	Office: 435-781-4490	Cell: 435-828-4470
Petroleum Engineer:	Michael Lee	Office: 435-781-4432	
Supervisory Petroleum Technician:	Jamie Sparger	Office: 435-781-4502	Cell: 435-828-3913
NRS/Environmental Scientist:	Scott Ackerman	Office: 435-781-4437	
NRS/Environmental Scientist:	Paul Buhler	Office: 435-781-4475	Cell: 435-828-4029
NRS/Environmental Scientist:	Jannice Cutler	Office: 435-781-3400	
NRS/Environmental Scientist:	Michael Cutler	Office: 435-781-3401	
NRS/Environmental Scientist:	Anna Figueroa	Office: 435-781-3407	
NRS/Environmental Scientist:	Melissa Hawk	Office: 435-781-4476	
NRS/Environmental Scientist:	Chuck Macdonald	Office: 435-781-4441	
NRS/Environmental Scientist:	Nathan Packer	Office: 435-781-3405	
NRS/Environmental Scientist:	Verlyn Pindell	Office: 435-781-3402	
NRS/Environmental Scientist:	Holly Villa	Office: 435-781-4404	
NRS/Environmental Scientist:	Darren Williams	Office: 435-781-4447	
NRS/Environmental Scientist:	Karl Wright	Office: 435-781-4484	
<b>After Hours Contact Number:</b> 435-781-4513		Fax: 435-781-4410	

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR  
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a one-year period. An additional year extension may be applied for by sundry notice prior to expiration.**

**NOTIFICATION REQUIREMENTS**

- Location Construction (Notify NRS) - Forty-Eight (48) hours prior to construction of location and access roads.
- Location Completion (Notify NRS) - Prior to moving on the drilling rig.
- Spud Notice (Notify Petroleum Engineer) - Twenty-Four (24) hours prior to spudding the well.
- Casing String & Cementing (Notify Supervisory Petroleum Technician) - Twenty-Four (24) hours prior to running casing and cementing all casing
- BOP & Related Equipment Tests (Notify Supervisory Petroleum Technician) - Twenty-Four (24) hours prior to initiating pressure tests.
- First Production Notice (Notify Petroleum Engineer) - Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM  
CONDITIONS OF APPROVAL (COAs)***

1. If paleontologic materials are uncovered during construction, the operator shall immediately stop work that might further disturb such materials and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation will be necessary for the discovered paleontologic material.
2. The topsoil from the reserve pit shall be stripped and piled separately near the reserve pit. When the reserve pit is closed, it shall be re-contoured and the topsoil re-spread, and the area shall be seeded in the same manner as the location topsoil.
3. Once the location is plugged and abandoned, it shall be re-contoured to natural contours, topsoil re-spread where appropriate, and the entire location seeded with the recommended seed mix. Seeding shall take place by broadcasting the seed and walking it into the soil with a dozer immediately after the dirt work is completed.
4. The lessee/operator is given notice that lands on the lease have a stipulation. It is requested that the lessee/operator not initiate surface disturbing activities or drilling from May 15 through July
5. The lessee/operator is given notice that lands on the lease have a stipulation. It is requested that the lessee/operator not initiate surface disturbing activities or drilling from May 15 through July 20.

### ***DOWNHOLE CONDITIONS OF APPROVAL***

**All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to.** The following items are emphasized:

#### **SITE SPECIFIC DOWNHOLE CONDITIONS OF APPROVAL**

1. The top of the production casing cement shall extend a minimum of 200 feet above the surface casing shoe.
2. A Cement Bond Log (CBL) shall be run in the production casing from the TD to the top of cement. A field copy of the CBL shall be submitted to the BLM Vernal Field Office for review.

#### **DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS**

1. There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well. Any changes in operation must have prior approval from the BLM, Vernal Field Office Petroleum Engineers.
2. The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
3. **Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.**
4. Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.

All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.

BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.

Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.

No aggressive/fresh hard-banded drill pipe shall be used within casing.

5. The lessee/operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled and analyzed (a copy of the analyses to be submitted to the BLM Field Office in Vernal, Utah).

6. All oil and gas shows shall be adequately tested for commercial possibilities, reported, and protected.
7. The lessee/operator must report encounters of all non oil & gas mineral resources (such as gilsonite, tar sands, oil shale, etc.) to a geologist of the Vernal Field Office in writing within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
8. No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM, Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM, Vernal Field Office shall be obtained and notification given before resumption of operations.
9. Chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.

Any change in the program shall be approved by the BLM, Vernal Field Office. "Sundry Notices and Reports on Wells" (Form BLM 3160-5) shall be filed for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Emergency approval may be obtained orally, but such approval does not waive the written report requirement. Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan pursuant to Onshore Oil & Gas Order No. 1 of 43 CFR 3164.1 and prior approval by the BLM, Vernal Field Office.

In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.

10. Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

A cement bond log (CBL) will be run from the production casing shoe to the surface casing shoe and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

**Please submit an electronic copy of all other logs run on this well in LAS format to UT\_VN\_Wellogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**

11. All off-lease storage, off-lease measurement, or commingling on-lease or off-lease shall have prior written approval from the BLM, Vernal Field Office.  
  
All measurement points shall be identified as point of sales or allocation for royalty determination prior to the installation of facilities.
12. Oil and gas meters shall be calibrated in place prior to any deliveries. The Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM, Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement.
13. A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM, Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
14. This APD is approved subject to the requirement that, should the well be successfully completed for production, the BLM, Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
  - a. Operator name, address, and telephone number.
  - b. Well name and number.
  - c. Well location (¼¼, Sec., Twn, Rng, and P.M.).
  - d. Date well was placed in a producing status (date of first production for which royalty will be paid).
  - e. The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
  - f. The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.

- g. Unit agreement and / or participating area name and number, if applicable.
  - h. Communitization agreement number, if applicable.
15. Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from Field Office Petroleum Engineers.
  16. All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production
  17. Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
  18. Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.



**Application for Permit to Drill  
Request for Permit Extension  
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

**API:** 4304738236  
**Well Name:** BONANZA 1023-17G  
**Location:** SWNE, SEC 17-T10S-R23E  
**Company Permit Issued to:** KERR-MCGEE OIL AND GAS ONSHORE LP  
**Date Original Permit Issued:** 6/15/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes  No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes  No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes  No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes  No

Has the approved source of water for drilling changed? Yes  No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes  No

Is bonding still in place, which covers this proposed well? Yes  No

Ramsey Hoopes pu  
Signature

5/23/2007

Date

Title: REGULATORY CLERK

Representing: KERR-MCGEE OIL AND GAS ONSHORE L

RECEIVED

MAY 29 2007

DIV. OF OIL, GAS & MINING



JON M. HUNTSMAN, JR.  
Governor

GARY R. HERBERT  
Lieutenant Governor

# State of Utah

## DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER  
Executive Director

### Division of Oil, Gas and Mining

JOHN R. BAZA  
Division Director

June 12, 2007

Raleen White  
Kerr McGee O&G Onshore LP  
1999 Broadway, Suite 3700  
Denver, CO 80202

Re: APDs Rescinded at the request of Kerr McGee O&G Onshore LP.

Dear Ms. White:

Enclosed find the list of APDs that you requested to be rescinded to Kerr McGee O&G Onshore LP. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded, effective June 11, 2007.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject locations.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

  
Diana Mason  
Environmental Scientist

cc: Well File  
Bureau of Land Management, Vernal

Page 2  
June 12, 2007  
Subject:

Bonanza 1023-12B

Bonanza 1023-1N

Bonanza 1023-1O

Bonanza 1023-11A

Bonanza 1023-11H

Bonanza 1023-14F

Bonanza 1023-15O

Bonanza 1023-15E

Bonanza 1023-17A

Bonanza 1023-17H

Bonanza 1023-17G

Bonanza 1023-17K

Bonanza 1023-17F

Bonanza 1023-17D

Bonanza 1023-18J