

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE*

FORM APPROVED
OMB NO. 1040-0136
Expires: February 28, 1995

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

TYPE OF WORK DRILL <input checked="" type="checkbox"/> DEEPEN <input type="checkbox"/>		5. LEASE DESIGNATION AND SERIAL NO. UTU-0806
TYPE OF WELL <input type="checkbox"/> OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input checked="" type="checkbox"/> SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE		6. IF INDIAN, ALLOTTEE OR TRIBE NAME UTE TRIBE
2. NAME OF OPERATOR QEP UINTA BASIN, INC.		7. UNIT AGREEMENT NAME WONSITS VALLEY UNIT
3. ADDRESS 11002 E. 17500 S. Vernal, Ut 84078		8. FARM OR LEASE NAME, WELL NO. WV 16DML-13-8-21
Contact: Jan Nelson E-Mail: jan.nelson@questar.com		9. API NUMBER: 43047-38735
Telephone number Phone 435-781-4331 Fax 435-781-4323		10. FIELD AND POOL, OR WILDCAT WONSITS VALLEY
4. LOCATION OF WELL (Report location clearly and in accordance with and State requirements*) At Surface 628401X 419' FSL 265' FEL SESE SECTION 13 T8S R21E At proposed production zone 4441698Y 40.117693 - 109.493247		11. SEC., T, R, M, OR BLK & SURVEY OR AREA SEC. 13, T8S, R21E Mer SLB
14. DISTANCE IN MILES FROM NEAREST TOWN OR POSTOFFICE* 10 +/- EAST OF OURAY, UTAH		12. COUNTY OR PARISH Uintah
15. DISTANCE FROM PROPOSED LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (also to nearest drig, unit line if any) 265' +/-		13. STATE UT
16. NO. OF ACRES IN LEASE 2480.00		17. NO. OF ACRES ASSIGNED TO THIS WELL 20
18. DISTANCE FROM PROPOSED location to nearest well, drilling, completed, applied for, on this lease, ft 1000' +/-		19. PROPOSED DEPTH 11,200'
20. BLM/BIA Bond No. on file ESB000024		21. ELEVATIONS (Show whether DF, RT, GR, ect.) 4885.6' GR
22. DATE WORK WILL START ASAP		23. Estimated duration 20 days
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan
- A surface Use Plan (if location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification.
- Such other site specific information and/or plans as may be required by the authorized officer.

SIGNED Jan Nelson Name (printed/typed) Jan Nelson DATE 10-16-06

TITLE Regulatory Affairs

(This space for Federal or State office use)

PERMIT NO. 43047-38735 APPROVAL DATE _____

CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY Bradley G. Hill TITLE BRADLEY G. HILL ENVIRONMENTAL MANAGER DATE 10-30-06

*See Instructions On Reverse Side

Title 18 U.S.C Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

Federal Approval of this
Action is Necessary

CONFIDENTIAL

RECEIVED
OCT 19 2006
DIV. OF OIL, GAS & MINING

T8S, R21E, S.L.B.&M.

R
21
E

R
22
E

QUESTAR EXPLR. & PROD.



Well location, WV #16DML-13-8-21, located as shown in the SE 1/4 SE 1/4 of Section 13, T8S, R21E, S.L.B.&M., Uintah County, Utah.

BASIS OF ELEVATION

BENCH MARK 20EAM LOCATED IN THE SE 1/4 OF SECTION 35, T8S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4697 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

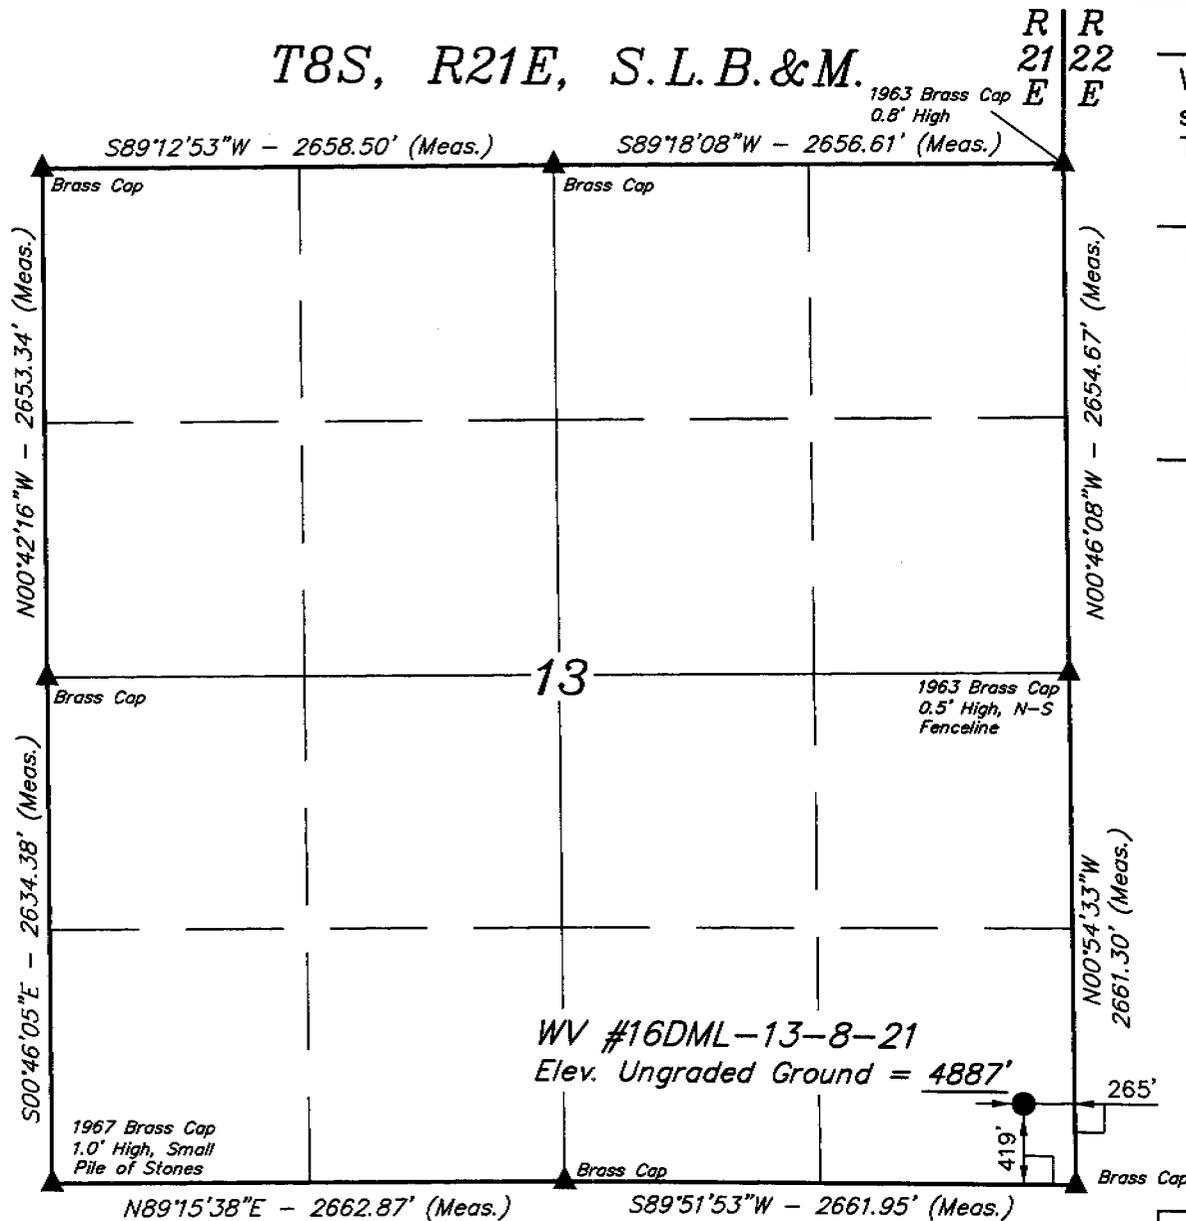

CERTIFY
 REGISTERED LAND SURVEYOR
 STATE OF UTAH
 REGISTRATION NO. 16319

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEY MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

UINTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

- LEGEND:
- └─┘ = 90° SYMBOL
 - = PROPOSED WELL HEAD.
 - ▲ = SECTION CORNERS LOCATED.

(NAD 83)
 LATITUDE = 40°07'03.66" (40.117683)
 LONGITUDE = 109°26'37.96" (109.443878)
 (NAD 27)
 LATITUDE = 40°07'03.79" (40.117719)
 LONGITUDE = 109°26'35.49" (109.443192)

SCALE 1" = 1000'	DATE SURVEYED: 05-23-06	DATE DRAWN: 06-01-06
PARTY D.A. T.A. L.K.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE QUESTAR EXPLR. & PROD.	

Additional Operator Remarks

QEP Uinta Basin, Inc. proposes to drill a well to 11,200' to test the MesaVerde. If productive, casing will be run and the well completed. If dry, the well will be plugged and abandoned as per BLM and State of Utah requirements"

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

Please be advised that QEP Uinta Basin Inc. agrees to be responsible under the terms and conditions of the lease for the operations conducted upon the lease lands.

Bond coverage for this well is provided by Bond No.ESB000024. The principal is QEP Uinta Basin Inc. via surety as consent as provided for the 43 CFR 3104.2.

DRILLING PROGRAM

ONSHORE OIL & GAS ORDER NO. 1
Approval of Operations on Onshore
Federal Oil and Gas Leases

All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas No. 1, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

1. **Formation Tops**

The estimated tops of important geologic markers are as follows:

<u>Formation</u>	<u>Depth, TVD</u>
Uinta	Surface
Green River	2,569'
Wasatch	5,844'
Mesaverde	8,819'
Sego	11,134'
TD	11,200'

2. **Anticipated Depths of Oil Gas Water and Other Mineral Bearing Zones**

The estimated depths at which the top and bottom of the anticipated water, oil, gas, or other mineral bearing formations are expected to be encountered are as follows:

<u>Substance</u>	<u>Formation</u>	<u>Depth, TVD</u>
Gas	Wasatch	5,844'
Gas	Mesaverde	8,819'

All fresh water and prospectively valuable minerals encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

All water shows and water-bearing sands will be reported to the BLM in Vernal, Utah. Copies of State of Utah form OGC-8-X are acceptable. If flows are detected, samples will be submitted to the BLM along with any water analyses conducted. Fresh water will be obtained from Wonsits Valley water right # A36125 (which was filed on May 7, 1964,) or Red Wash water right # 49-2153 (which was filed on March 25, 1960). It was determined by the Fish and Wildlife Service that any water right number filed before 1989 is not depleting to the Upper Colorado River System, to supply fresh water for drilling purposes.

DRILLING PROGRAM

All water resulting from drilling operations will be disposed of at Red Wash Central Battery Disposal Site; SWSE, Section 27, T7S, R23E or Wonsits Valley Disposal Site; SWNW, Section 12, T8S, R21E.

3. Operator's Specification for Pressure Control Equipment:

- A. 5,000 psi W.P. Double Gate BOP, 5,000 psi annular (schematic attached)
- B. Functional test daily
- C. All casing strings shall be pressure tested (0.22 psi/foot or 1500 psi, whichever is greater) prior to drilling the plug after cementing; test pressure shall not exceed the internal yield pressure of the casing.
- D. Ram type preventers and associated equipment shall be tested to approved stack working pressure if isolated by test plug or to 50 percent of internal yield pressure of casing whichever is less. BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc..., for a 5M system and individual components shall be operable as designed.

4. Casing Program

Hole Size	Csg. Size	Top (MD)	Bottom (MD)	Wt.	Grade	Thread	Cond.
20"	14"	sfc	40'	Steel	Cond.	None	Used
12-1/4"	9-5/8"	sfc	450'	36.0	J-55	STC	New
8-3/4"	7"	sfc	7,800'	26.0	J-55	LTC	New
6-1/8"	4-1/2"	sfc	11,200'	11.6	P-110	LTC	New

Casing Strengths:				Collapse	Burst	Tensile (minimum)
9-5/8"	36.0 lb.	J-55	STC	2,020 psi	3,520 psi	394,000 lb.
7"	26.0 lb.	J-55	LTC	4,320 psi	4,980 psi	367,000 lb.
4-1/2"	11.6 lb.	P-110	LTC	7,580 psi	10,690 psi	279,000 lb.

DRILLING PROGRAM

5. **Auxiliary Equipment**

- A. Kelly Cock – yes
- B. Float at the bit – no
- C. Monitoring equipment on the mud system – visually and/or PVT/Flow Show
- D. Full opening safety valve on the rig floor – yes
- E. Rotating Head – yes
- F. If drilling with air the following will be used:
- G. The blooie line shall be at least 6” in diameter and extend at least 100’ from the well bore into the reserve/blooie pit.
- H. Blooie line ignition shall be provided by a continuous pilot (ignited when drilling below 500’).
- I. Compressor shall be tied directly to the blooie line through a manifold.
- J. A mister with a continuous stream of water shall be installed near the end of the blooie lines for dust suppression.

Surface hole will be drilled with air, air/mist, foam, or mud depending on hole conditions. Drilling below surface casing will be with water based drilling fluids consisting primarily of fresh water, bentonite, lignite, caustic, lime, soda ash and polymers. No chromates will be used. It is not intended to use oil in the mud, however, in the event it is used, oil concentration will be less than 4% by volume. Maximum anticipated mud weight is 11.5 ppg.

No minimum quantity of weight material will be required to be kept on location.

PVT/Flow Show will be used from base of surface casing to TD.

Gas detector will be used from surface casing depth to TD.

DRILLING PROGRAM

6. **Testing, logging and coring program**

- A. Cores – none anticipated
- B. DST – none anticipated
- C. Logging – Mud Logging – 1500' to TD
GR-SP-Induction
Neutron Density
- D. Formation and Completion Interval: Green River/Wasatch/Mesaverde interval, final determination of completion will be made by analysis of logs.
Stimulation: Stimulation will be designed for the particular area of interest as encountered.

7. **Cementing Program**

14" Conductor:

Cement to surface with construction cement.

9-5/8" Surface Casing: sfc - 450' (MD)

Lead/Tail Slurry: 0' – 450'. 240 sks (280 cu ft) Premium AG cement + 2% CaCl₂ + 0.25 lb/sk celloflake. Slurry wt: 15.8 ppg, Slurry yield: 1.17 ft³/sk, Slurry volume: 12-1/4" hole + 100% excess.

7" Intermediate Casing: sfc - 7,800' (MD)

Lead Slurry: 0' – 5,400'. 310 sks (1200 cu ft) Halliburton Hi-Fill cement. Slurry wt: 11.0 ppg, Slurry yield: 3.86 ft³/sk, Slurry volume: 8-3/4" hole + 50% excess in open hole section.

Tail Slurry: 5,400' – 7,800'. 435 sks (540 cu ft) of 50/50 Poz Premium AG + 2.0% Bentonite + 0.6% Halad (R)-322 fluid loss + 2.0% Microbond M expander + 5% salt + 0.25 lb/sk Flocele. Slurry wt: 14.35 ppg, Slurry yield: 1.24 ft³/sk, Slurry volume: 8-3/4" hole + 50% excess.

4-1/2" Production Casing: sfc - 11,200' (MD)

Lead Slurry: 0' - 5,400'. 150 sks (575 cu ft) Halliburton Hi-Fill cement + 16% Bentonite + 0.75% Econolite + 3% salt + 0.8% HR-7 retarder. Slurry wt: 11.0 ppg, Slurry yield: 3.84 ft³/sk, Slurry volume: 4-1/2" casing inside 7" casing.

Tail Slurry: 5,400' – 11,200'. 700 sks (870 cu ft) of 50/50 Poz Premium AG + 2.0% Bentonite + 0.6% Halad (R)-322 fluid loss + 2.0% Microbond M expander + 5% salt + 0.2% HR-5 retarder + 0.25 lb/sk Flocele. Slurry wt: 14.35 ppg, Slurry yield: 1.24 ft³/sk, Slurry volume: 6-1/8" hole + 20% excess in open hole section.

DRILLING PROGRAM

*Final cement volumes to be calculated from caliper log with an attempt to be made to circulate cement to the surface. A bond log will be run across the zone of interest and across zones as required by the authorized officer to insure protection of natural resources.

8. Anticipated Abnormal Pressures and Temperatures, Other Potential Hazards

No abnormal temperatures or pressures are anticipated. No H₂S has been encountered in or known to exist from previous wells drilled to similar depths in the general area. Maximum anticipated bottom hole pressure equals approximately 6,700 psi. Maximum anticipated bottom hole temperature is 215° F.

9. Surface is owned by the Ute Indian tribe.

5M BOP STACK

11" Rotating Head

11" Spacer Spool


11" 5M Annular


11" 5M Double Ram

G.L.

11" 5M x 5M Multi-Bowl Head

9 5/8" 5M Casing Head

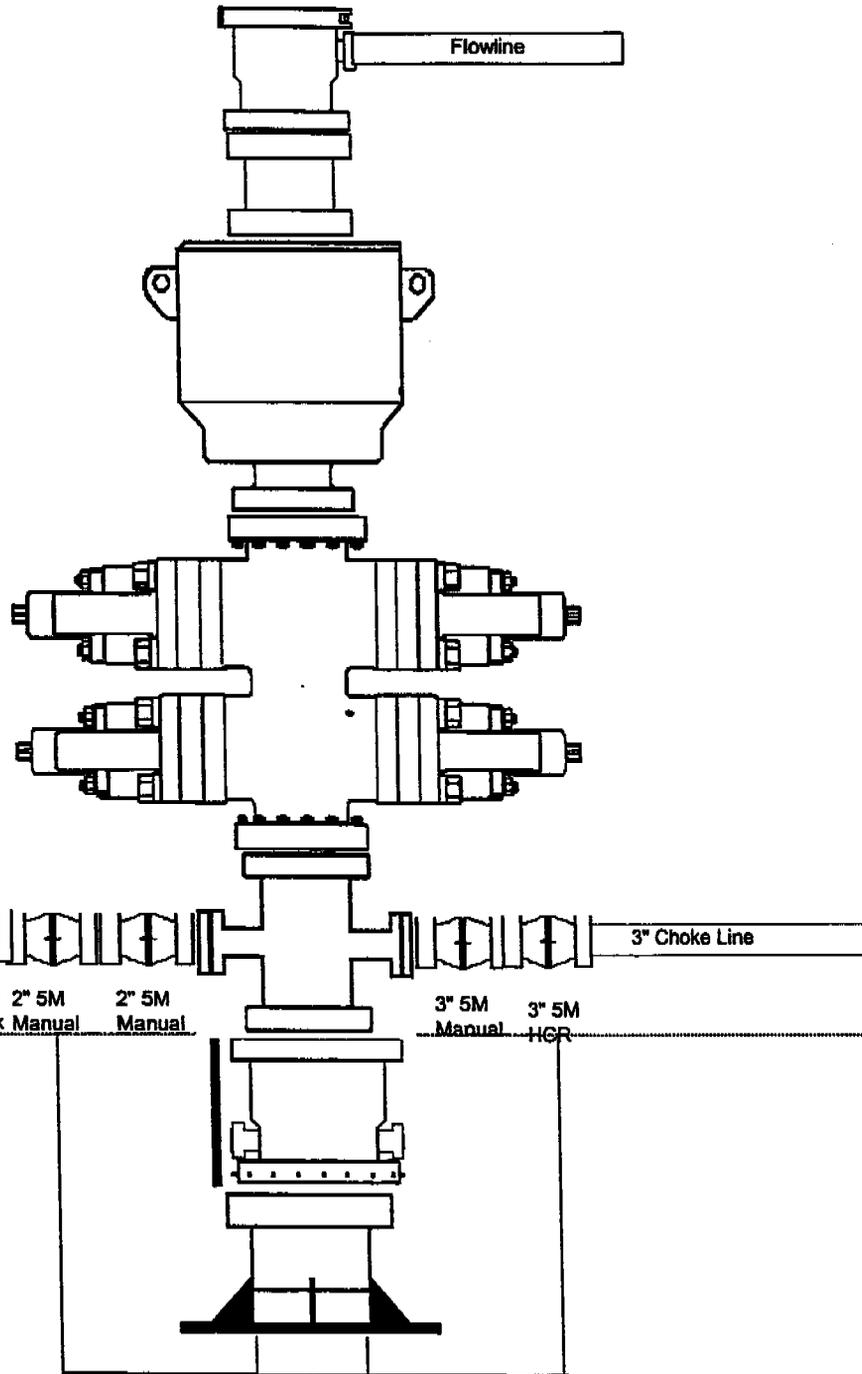

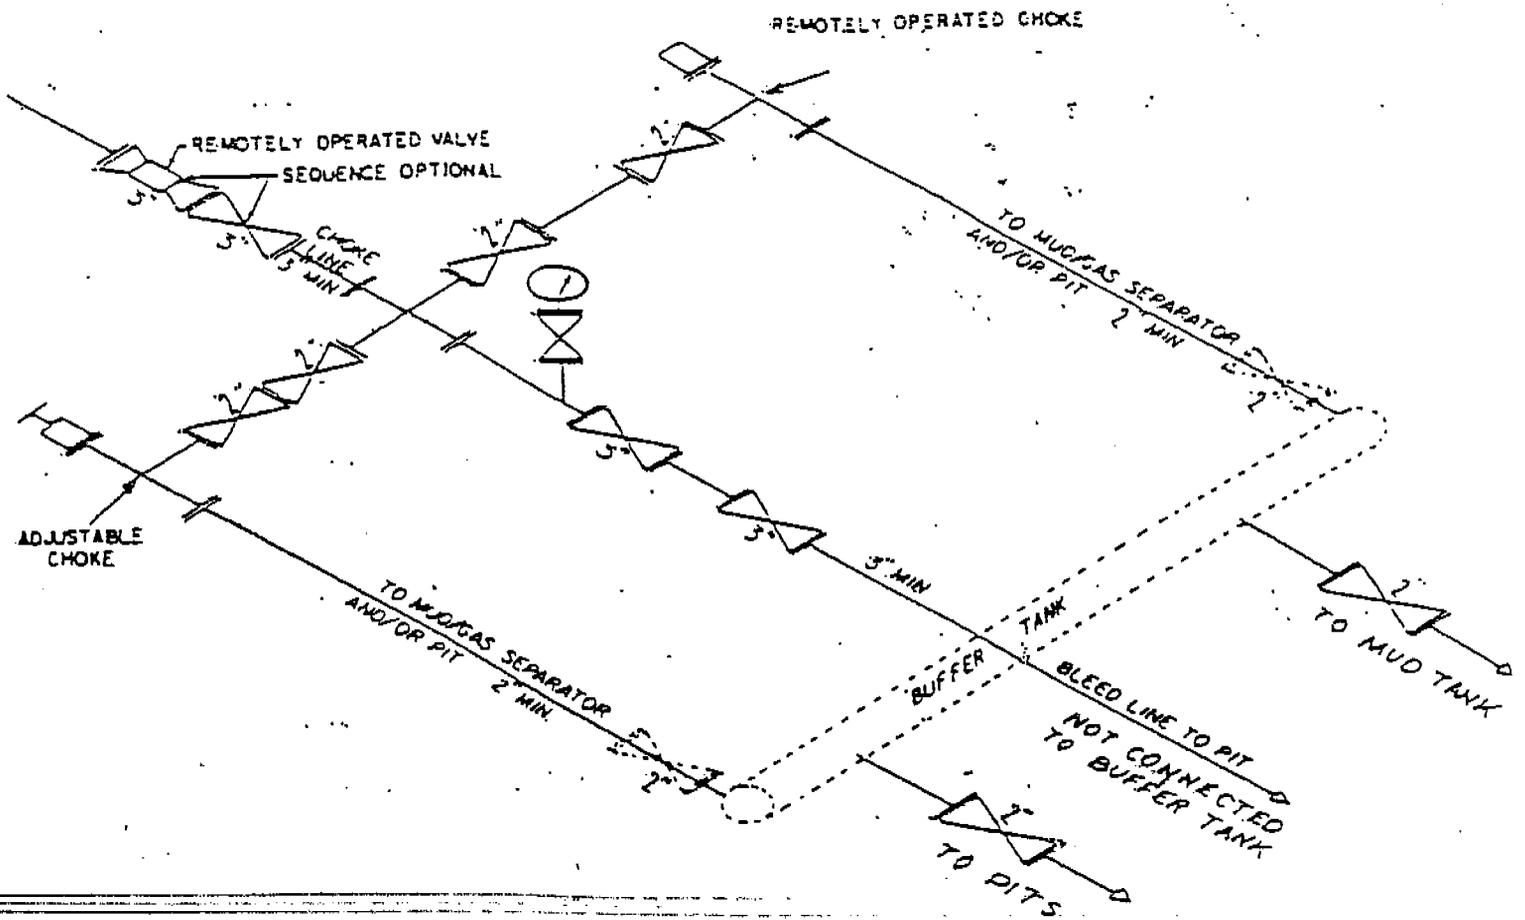

② 5M CHOKE MANIFOLD EQUIPMENT — CONFIGURATION OF CHOKES MAY VARY

QEP UINTA BASIN, INC.
WV 16DML-13-8-21
419' FSL 265' FEL
SESE, SECTION 13, T8S, R21E
UINTAH COUNTY, UTAH
LEASE # UTU-0806

ONSHORE ORDER NO. 1

MULTI – POINT SURFACE USE & OPERATIONS PLAN

1. **Existing Roads:**

The proposed well site is approximately 10 miles east of Ouray, Utah.

Refer to Topo Maps A and B for location of access roads within a 2 – mile radius.

There will be no improvements made to existing roads.

2. **Planned Access Roads:**

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

Refer to Topo Map B for the location of the proposed access road.

3. **Location of Existing Wells Within a 1 – Mile Radius:**

Please refer to Topo Map C.

4. **Location of Existing & Proposed Facilities:**

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

Refer to Topo Map D for the location of the proposed pipeline.

5. **Location and Type of Water Supply:**

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

6. **Source of Construction Materials:**

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

7. Methods of Handling Waste Materials:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

8. Ancillary Facilities:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

9. Well Site Layout: (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

A pit liner is required. A felt pit liner will be required if bedrock is encountered.

10. Plans for Reclamation of the Surface:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

Interim Reclamation

Please see attached Interim Reclamation plan.

Once the well is put onto production, QEP will reclaim as much of the well pad as possible that will allow for operations to continue in a safe and reasonable manner. Reseeding will be done in the spring or fall of every year to allow winter precipitation to aid in the success of reclamation.

Seed Mix:

Interim Reclamation:

6 lbs Hycrest Crested Wheatgrass

6 lbs Needle & Threadgrass

Final Reclamation:

Seed Mix # 1 3 lbs. Fourwing Saltbush, 3 lbs. Indian Rice Grass, 4 lbs. Hycrest Crested Wheat Grass,
1 lb. Needle & Threadgrass

11. Surface Ownership:

The well pad and access road are located on lands owned by:

Ute Tribe

PO Box 70

FT. Duchesne, UT 84026

12. Other Information

A Class III archaeological survey was conducted by Montgomery Archaeology Consultants. A copy of this report was submitted directly to the appropriate agencies by Montgomery Archaeology Consultants. Cultural resource clearance was recommended for this location.

Lessee's or Operator's Representative:

Jan Nelson
Red Wash Rep.
QEP Uinta Basin, Inc.
11002 East 17500 South
Vernal, Utah 84078
(435) 781-4331


Certification:

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil & Gas Orders, the approved plan of operations, and any applicable Notice to Lessees.

QEP Uinta Basin Inc. will be fully responsible for the actions of their subcontractors.

A complete copy of the approved Application for Permit to Drill will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by QEP Uinta Basin, Inc. it's contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.



Jan Nelson
Red Wash Representative

16-Oct-06

Date

QUESTAR EXPLR. & PROD.

WV #16DML-13-8-21

LOCATED IN UINTAH COUNTY, UTAH
SECTION 13, T8S, R21E, S.L.B.&M.

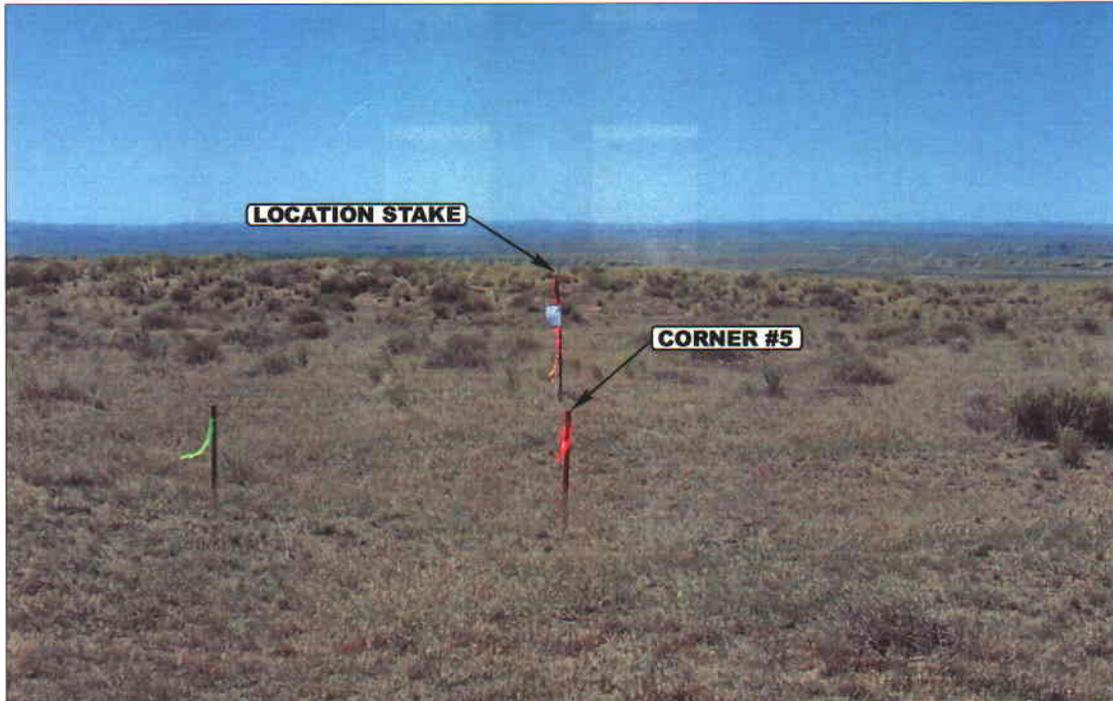


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: SOUTHERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: SOUTHEASTERLY



UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

06 07 06
MONTH DAY YEAR

PHOTO

TAKEN BY: D.A.

DRAWN BY: L.K.


REVISED: 00-00-00

- Since 1964 -

QUESTAR EXPLR. & PROD.



FIGURE #1

LOCATION LAYOUT FOR
 WV #16DML-13-8-21
 SECTION 13, T8S, R21E, S.L.B.&M.
 419' FSL 265' FEL



SCALE: 1" = 50'
 DATE: 06-01-06
 Drawn By: L.K.

NOTE:
 Flare Pit is to be located
 a min. of 100' from the
 Well Head.

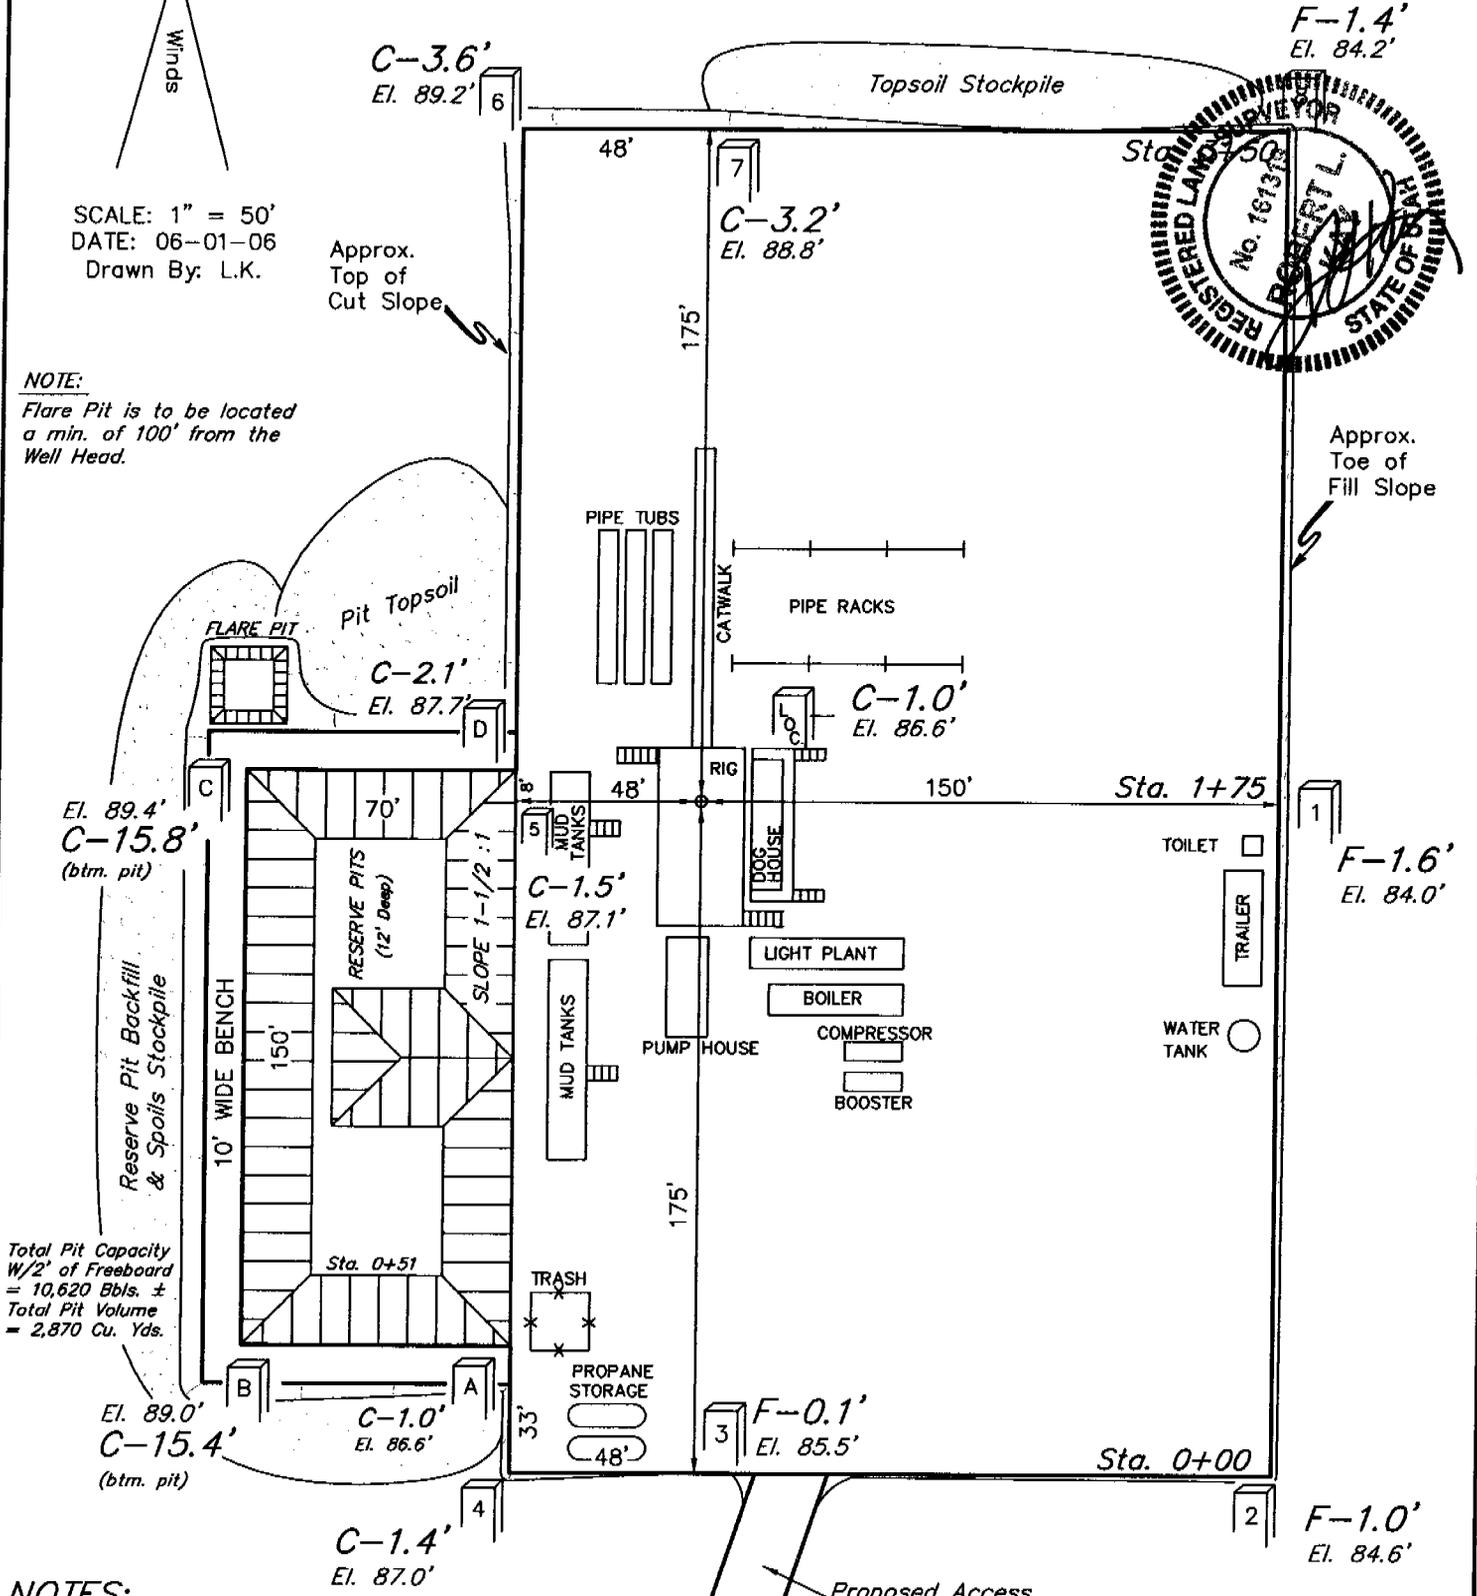

Total Pit Capacity
 W/2' of Freeboard
 = 10,620 Bbls. ±
 Total Pit Volume
 = 2,870 Cu. Yds.

NOTES:

Elev. Ungraded Ground At Loc. Stake = 4886.6'
 FINISHED GRADE ELEV. AT LOC. STAKE = 4885.6'





QUESTAR EXPLR. & PROD.

FIGURE #2

TYPICAL CROSS SECTIONS FOR
 WV #16DML-13-8-21
 SECTION 13, T8S, R21E, S.L.B.&M.
 419' FSL 265' FEL

X-Section Scale
 1" = 20'
 1" = 50'

DATE: 06-01-06
 Drawn By: L.K.

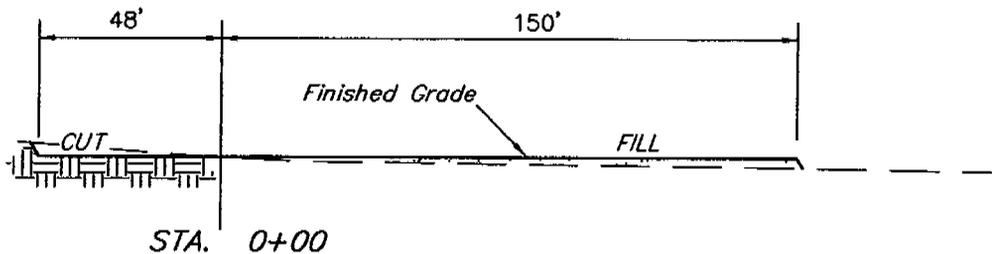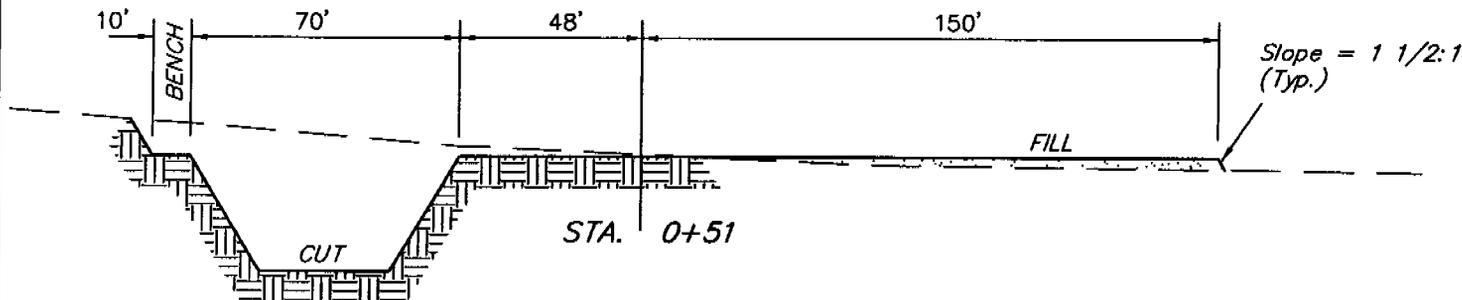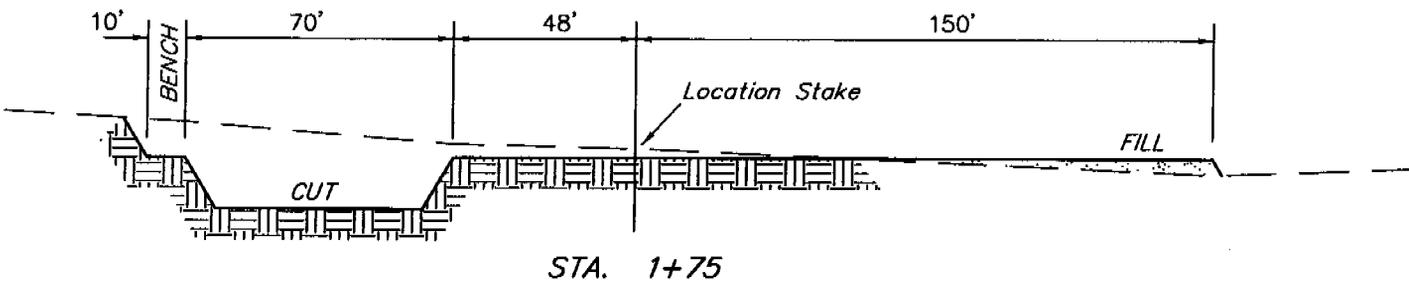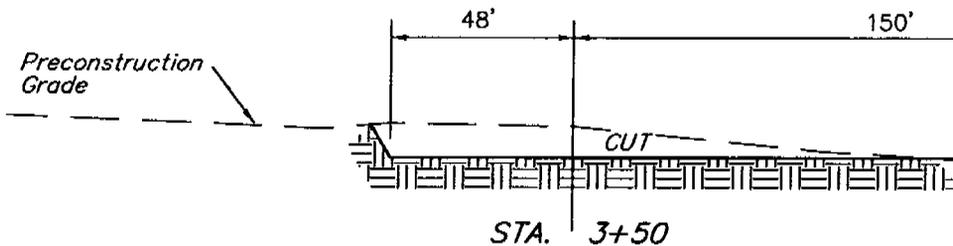

NOTE:
 Topsoil should not be Stripped Below Finished Grade on Substructure Area.

APPROXIMATE YARDAGES

CUT	
(12") Topsoil Stripping	= 3,290 Cu. Yds.
Remaining Location	= 4,240 Cu. Yds.
TOTAL CUT	= 7,530 CU.YDS.
FILL	= 2,800 CU.YDS.

* NOTE:
 FILL QUANTITY INCLUDES 5% FOR COMPACTION
 Excess Material = 4,730 Cu. Yds.
 Topsoil & Pit Backfill = 4,730 Cu. Yds.
 (1/2 Pit Vol.)
 EXCESS UNBALANCE = 0 Cu. Yds.
 (After Interim Rehabilitation)


QUESTAR EXPLR. & PROD.

INTERIM RECLAMATION PLAN FOR

WV #16DML-13-8-21
SECTION 13, T8S, R21E, S.L.B.&M.
419' FSL 265' FEL




SCALE: 1" = 50'
DATE: 06-01-06
Drawn By: L.K.

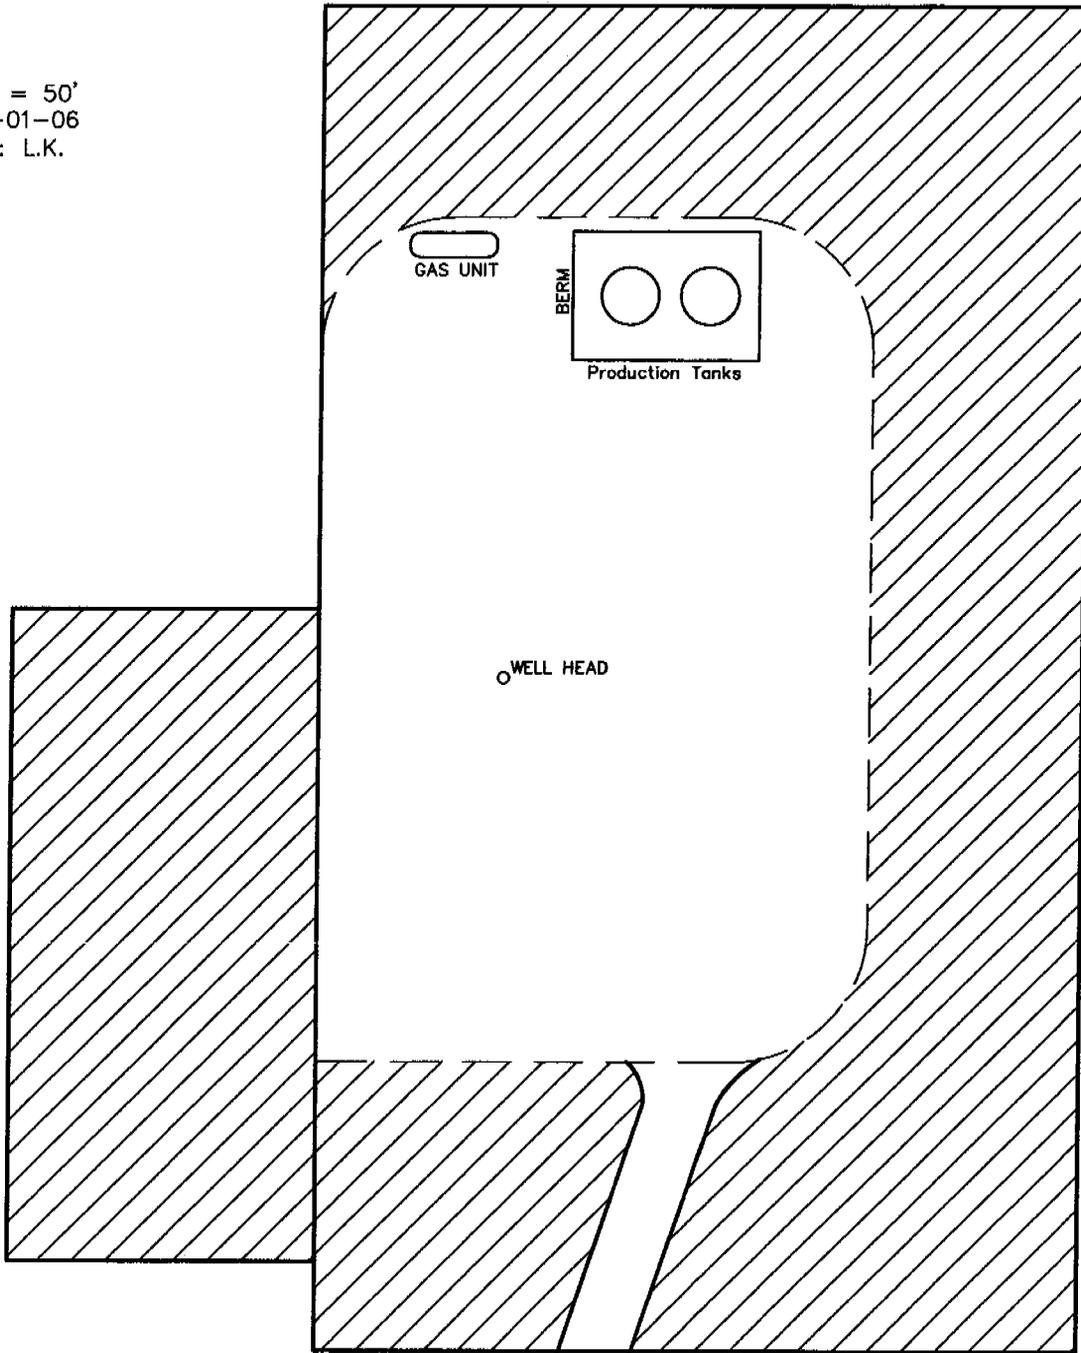

 INTERIM RECLAMATION

Access
Road

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

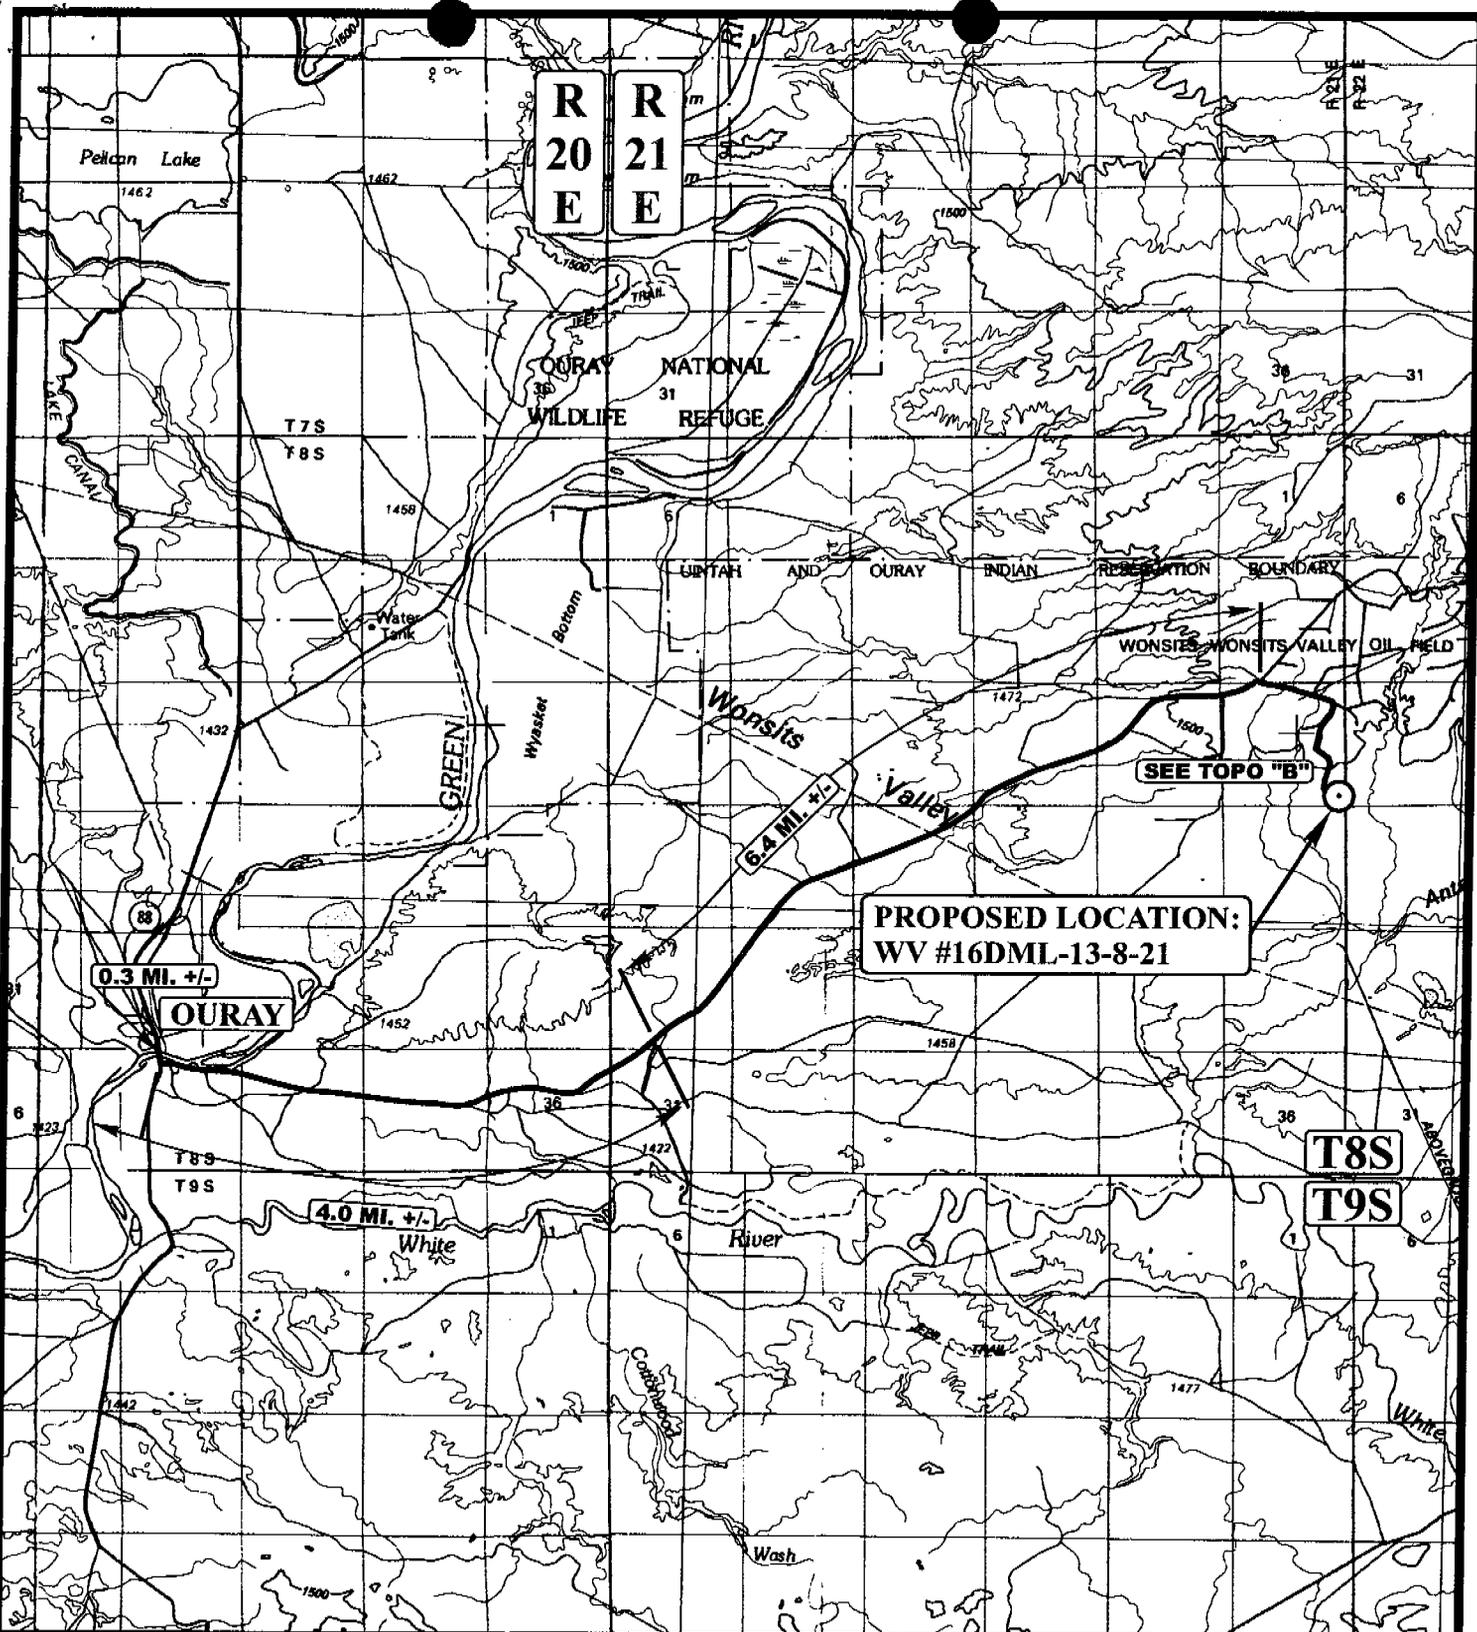

LEGEND:

○ PROPOSED LOCATION



QUESTAR EXPLR. & PROD.


WV #16DML-13-8-21
SECTION 13, T8S, R21E, S.L.B.&M.
419' FSL 265' FEL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP
06 MONTH 07 DAY 06 YEAR
SCALE: 1:100,000 DRAWN BY: L.K. REVISED: 00-00-00



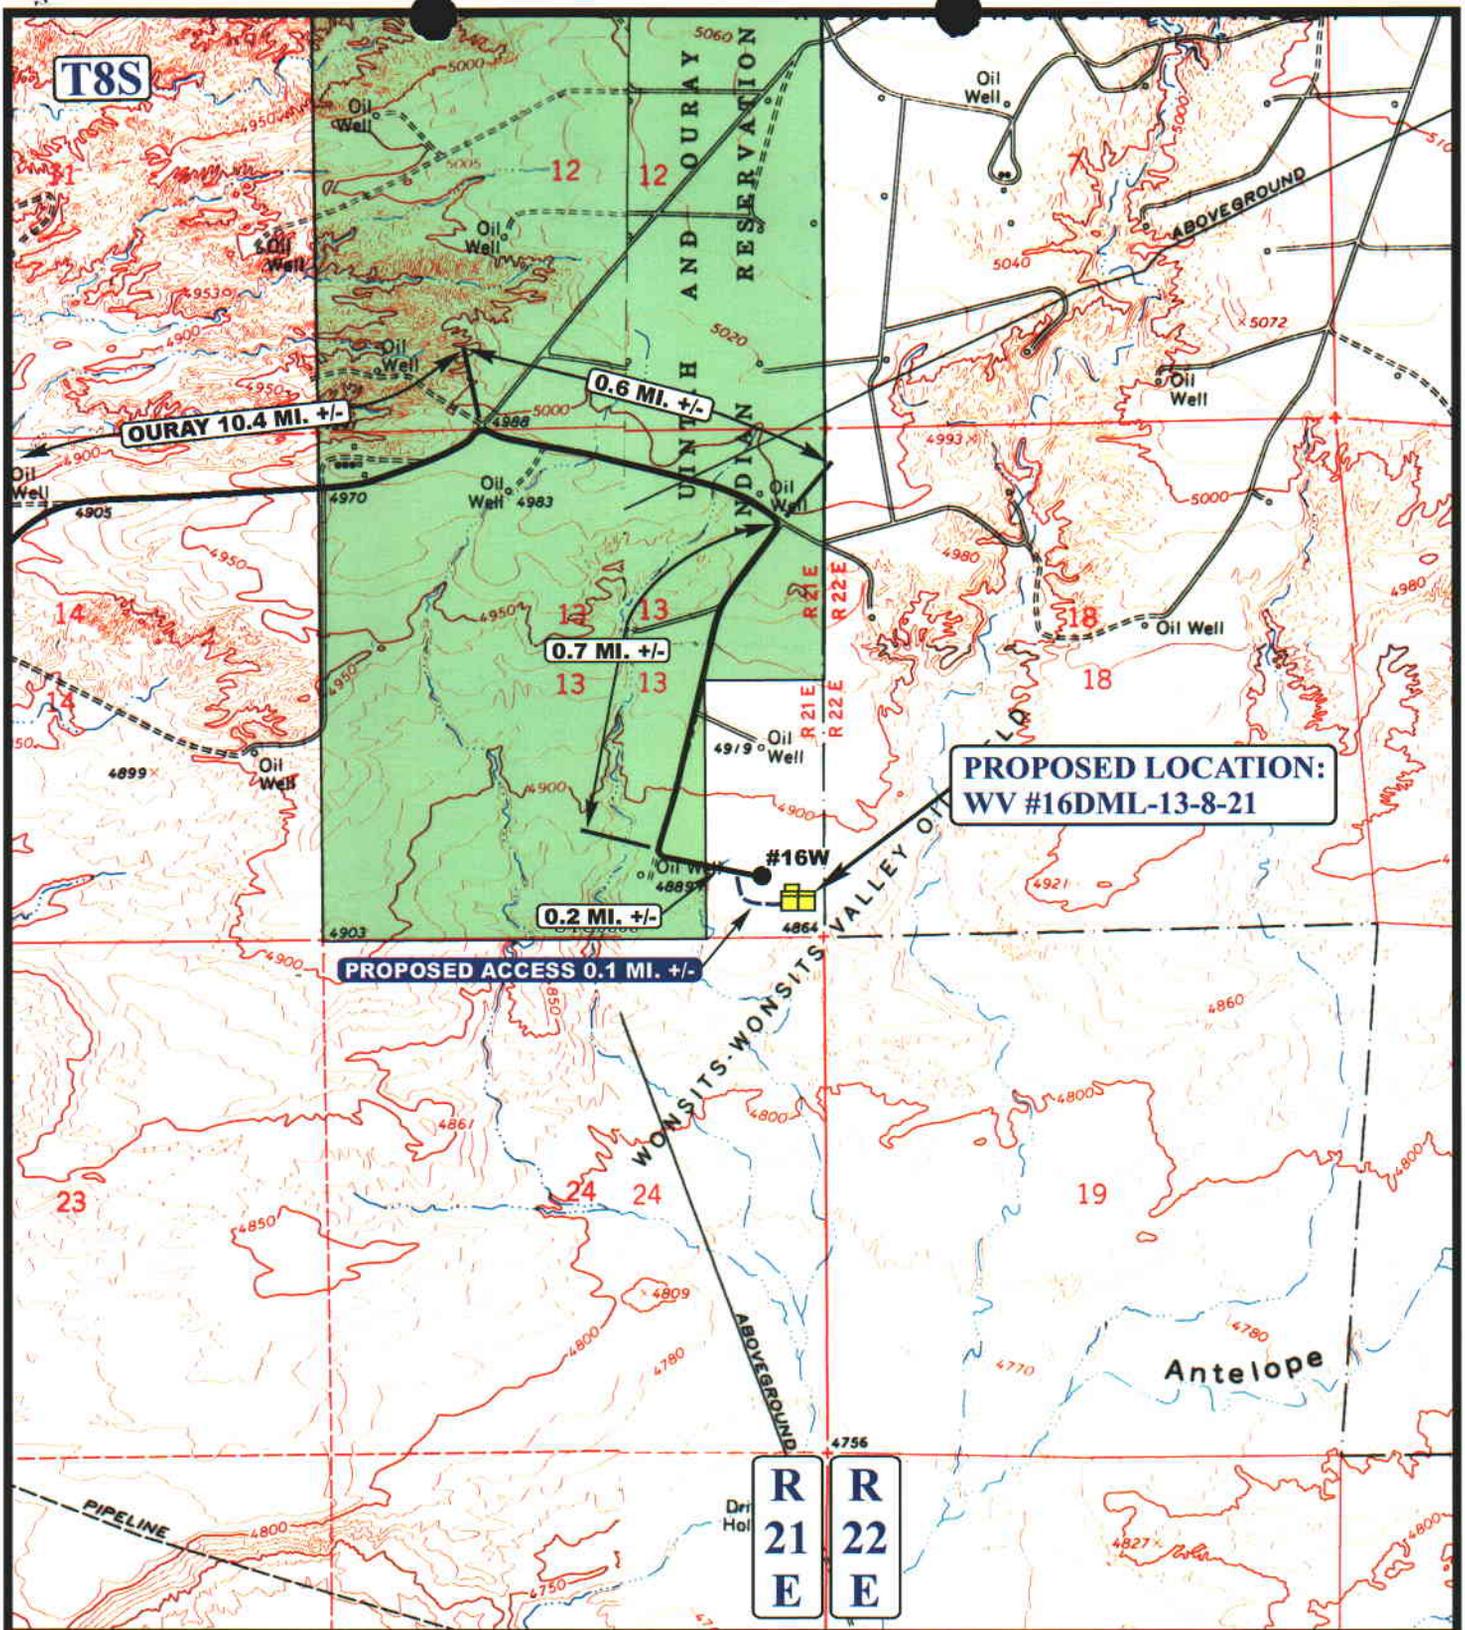

LEGEND:

- EXISTING ROAD
- PROPOSED ACCESS ROAD

QUESTAR EXPLR. & PROD.


WV #16DML-13-8-21
 SECTION 13, T8S, R21E, S.L.B.&M.
 419' FSL 265' FEL

UEIS Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC MAP 06 07 06
 MONTH DAY YEAR
 SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 00-00-00

B
 TOPO

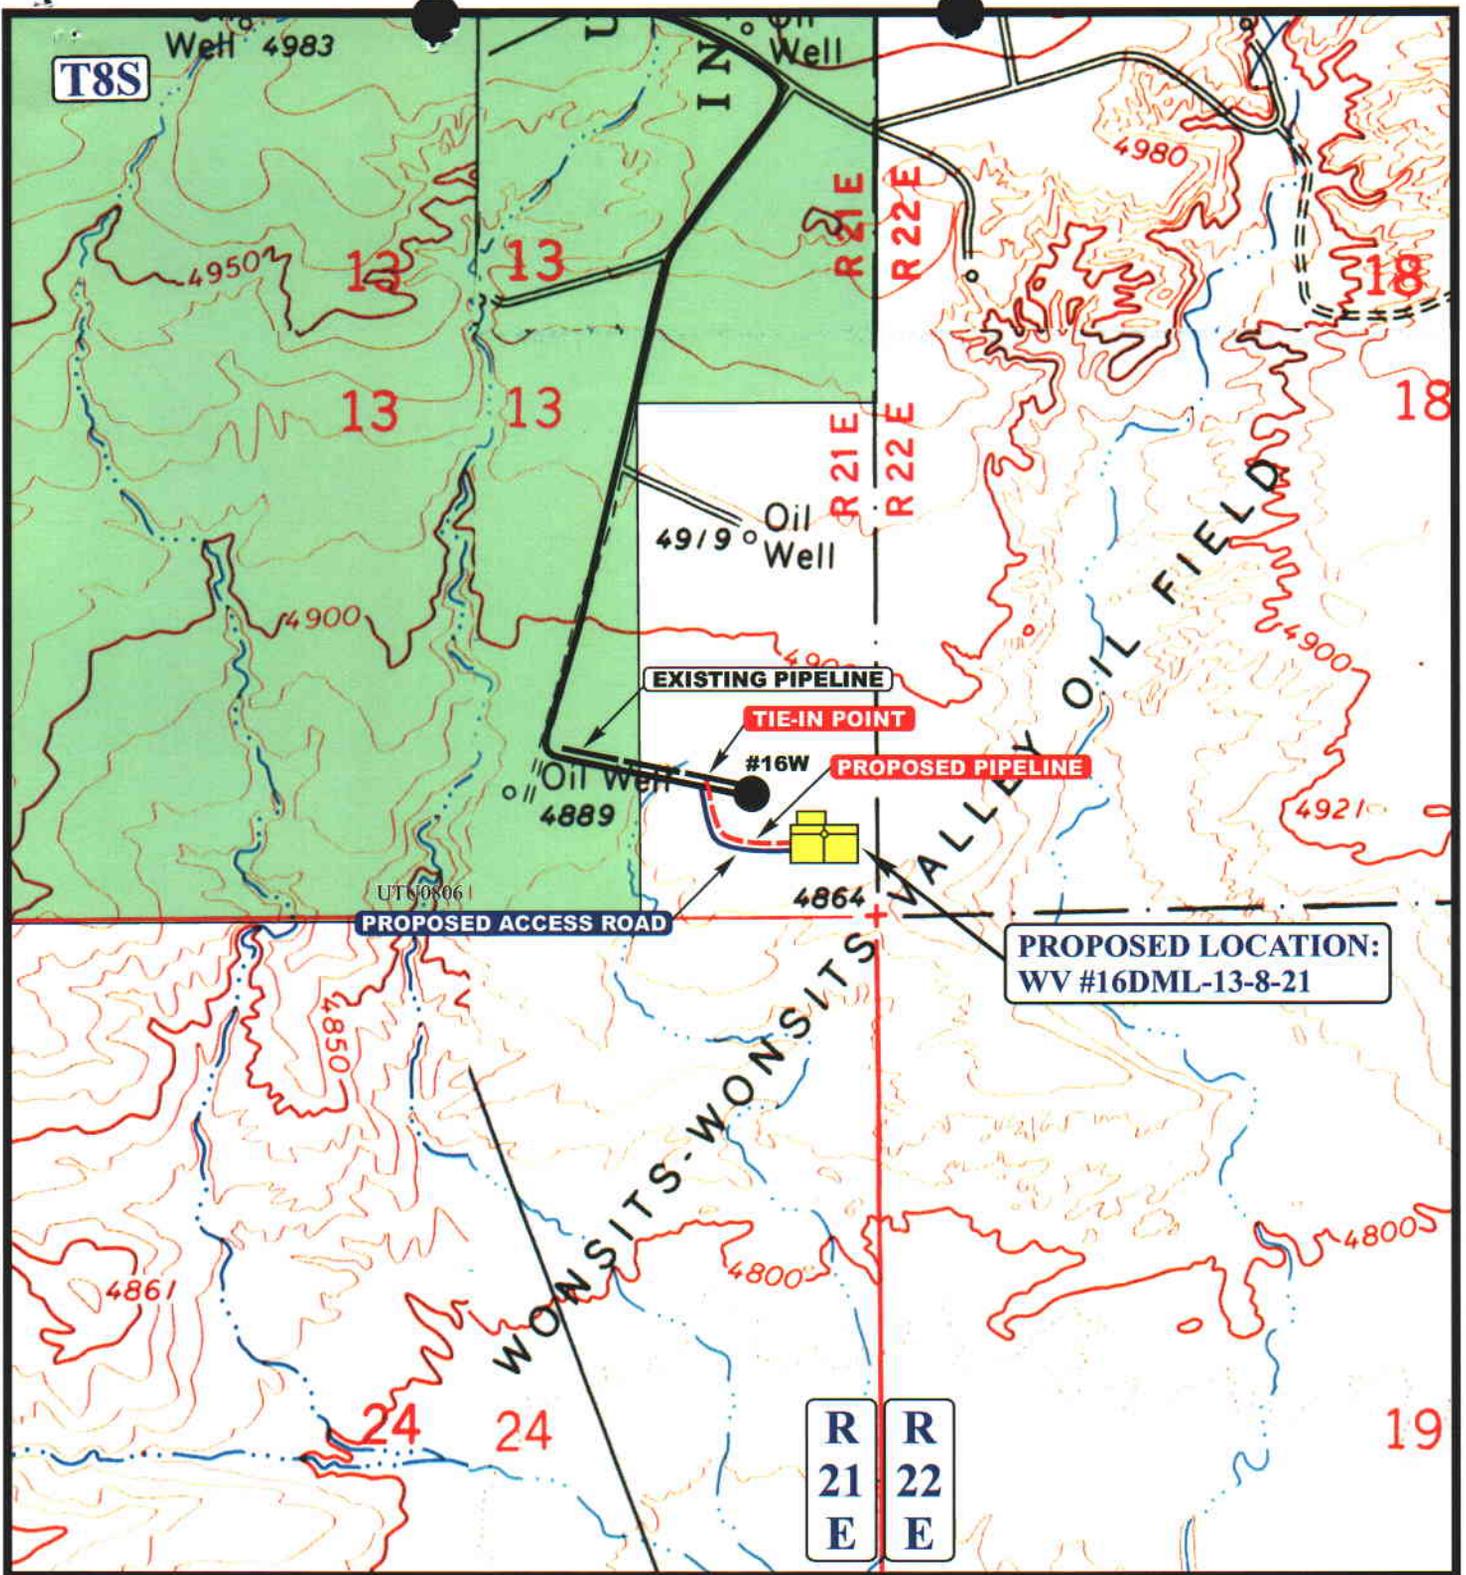

APPROXIMATE TOTAL PIPELINE DISTANCE = 710' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- PROPOSED PIPELINE
- PROPOSED PIPELINE (SERVICING OTHER WELLS)

QUESTAR EXPLR. & PROD.

WV #16DML-13-8-21
SECTION 13, T8S, R21E, S.L.B.&M.
419' FSL 265' FEL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC MAP 06 07 06
MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: L.K. REVISED: 00-00-00



**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 10/19/2006

API NO. ASSIGNED: 43-047-38735

WELL NAME: WV 16DML-13-8-21

OPERATOR: QEP UINTA BASIN, INC. (N2460)

CONTACT: JAN NELSON

PHONE NUMBER: 435-781-4331

PROPOSED LOCATION:

SESE 13 080S 210E
 SURFACE: 0419 FSL 0265 FEL
 BOTTOM: 0419 FSL 0265 FEL
 COUNTY: UINTAH
 LATITUDE: 40.11769 LONGITUDE: -109.4933
 UTM SURF EASTINGS: 628401 NORTHINGS: 4441698
 FIELD NAME: WONSITS VALLEY (710)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-0806

SURFACE OWNER: 2 - Indian

PROPOSED FORMATION: MVRD

COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. ESB000024)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 49-2153)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)

LOCATION AND SITING:

- R649-2-3.
- Unit: WONSITS VALLEY
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: 187-06
Eff Date: 8-20-2001
Siting: Suspends General Siting
- R649-3-11. Directional Drill

COMMENTS:

Sup, Separate file

STIPULATIONS:

1- Federal Approval

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:
3160
(UT-922)

October 27, 2006

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2006 Plan of Development Wonsits Valley Unit Uintah
County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2006 within the Wonsits Valley Unit, Uintah County, Utah.

API #	WELL NAME	LOCATION
-------	-----------	----------

(Proposed PZ MesaVerde)

43-047-38733	WV 01DML-13-8-21 Sec 13 T08S R21E 1242 FNL 0320 FEL	
43-047-38734	WV 04DML-13-8-21 Sec 13 T08S R21E 1142 FNL 1263 FWL	
43-047-38735	WV 16DML-13-8-21 Sec 13 T08S R21E 0419 FSL 0265 FEL	
43-047-38736	WV 03AML-14-8-21 Sec 14 T08S R21E 0127 FNL 2572 FWL	
43-047-38737	WV 16CML-14-8-21 Sec 14 T08S R21E 0048 FSL 1092 FEL	

This office has no objection to permitting the wells at this time.

/s/ Michael L. Coulthard

bcc: File – Wonsits Valley Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

October 30, 2006

QEP Uinta Basin, Inc.
11002 E 17500 S
Vernal, UT 84078

Re: Wonsits Valley 16DML-13-8-21 Well, 419' FSL, 265' FEL, SE SE, Sec. 13,
T. 8 South, R. 21 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-38735.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Bureau of Land Management, Vernal District Office

Operator: QEP Uinta Basin, Inc.
Well Name & Number Wonsits Valley 16DML-13-8-21
API Number: 43-047-38735
Lease: UTU-0806

Location: SE SE Sec. 13 T. 8 South R. 21 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

**Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET**

ROUTING

1. DJJ
2. CDW

Change of Operator (Well Sold)

X - Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:

1/1/2007

FROM: (Old Operator): N2460-QEP Uinta Basin, Inc. 1050 17th St, Suite 500 Denver, CO 80265 Phone: 1 (303) 672-6900	TO: (New Operator): N5085-Questar E&P Company 1050 17th St, Suite 500 Denver, CO 80265 Phone: 1 (303) 672-6900
---	--

WELL NAME	CA No.	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
SEE ATTACHED LISTS					*				

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 4/19/2007
2. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 4/16/2007
3. The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 1/31/2005
- 4a. Is the new operator registered in the State of Utah: Business Number: 764611-0143
- 5a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- 5b. Inspections of LA PA state/fee well sites complete on: n/a
- 5c. Reports current for Production/Disposition & Sundries on: n/a
6. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 4/23/2007 BIA
7. **Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: 4/23/2007
8. **Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: _____
9. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: _____

DATA ENTRY:

1. Changes entered in the **Oil and Gas Database** on: 4/30/2007 and 5/15/2007
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 4/30/2007 and 5/15/2007
3. Bond information entered in RBDMS on: 4/30/2007 and 5/15/2007
4. Fee/State wells attached to bond in RBDMS on: 4/30/2007 and 5/15/2007
5. Injection Projects to new operator in RBDMS on: 4/30/2007 and 5/15/2007
6. Receipt of Acceptance of Drilling Procedures for APD/New on: n/a

BOND VERIFICATION:

1. Federal well(s) covered by Bond Number: ESB000024
2. Indian well(s) covered by Bond Number: 799446
- 3a. (R649-3-1) The **NEW** operator of any state/fee well(s) listed covered by Bond Number 965003033
- 3b. The **FORMER** operator has requested a release of liability from their bond on: n/a

LEASE INTEREST OWNER NOTIFICATION:

4. (R649-2-10) The **NEW** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: n/a

COMMENTS: THIS IS A COMPANY NAME CHANGE.

SOME WELL NAMES HAVE BEEN CHANGED AS REQUESTED

QEP Uinta Basin (N2460) to QUESTAR E and P (N5085)
WONSITS VALLEY UNIT

4/30/2007 and 5/15/2007

Original Well Name	Well Name & No.	Q/Q	SEC	TWP	RNG	API	Entity	Lease	Well Type	Status
WVU 16	WV 16	NENE	15	080S	210E	4304715447	5265	Federal	WI	A
WVU 31	WV 31	NENW	14	080S	210E	4304715460	5265	Federal	WI	A
WVU 35	WV 35	NESW	14	080S	210E	4304715463	5265	Federal	WI	A
WV 36	WV 36	NESW	10	080S	210E	4304715464	5265	Federal	WI	A
WVU 41	WV 41	NENW	15	080S	210E	4304715469	5265	Federal	WI	A
WV 43	WV 43	SWSW	11	080S	210E	4304715471	5265	Federal	OW	P
WV 48	WV 48	SWNE	10	080S	210E	4304715476	5265	Federal	OW	P
WVU 50	WV 50	SWNE	15	080S	210E	4304715477	5265	Federal	WI	A
WV 53	WV 53	SWSE	10	080S	210E	4304720003	5265	Federal	OW	P
WVU 55	WV 55	SWNE	14	080S	210E	4304720005	5265	Federal	OW	P
WVU 59	WV 59	SWNW	14	080S	210E	4304720018	5265	Federal	WI	A
WVU 60	WV 60	SWSE	15	080S	210E	4304720019	5265	Federal	WI	A
WV 62	WV 62	SWSW	10	080S	210E	4304720024	5265	Federal	OW	P
WVU 65	WV 65	SWNW	15	080S	210E	4304720041	5265	Federal	OW	P
WVU 67	WV 67	NESW	15	080S	210E	4304720043	5265	Federal	WI	A
WVU 68	WV 68	NESE	15	080S	210E	4304720047	5265	Federal	WI	A
WVU 83	WV 83 WG	NENW	23	080S	210E	4304720205	14864	Federal	GW	S
WV 97	WV 97	NWSW	11	080S	210E	4304730014	5265	Federal	WI	A
WVU 103	WV 103	NWNW	14	080S	210E	4304730021	5265	Federal	OW	P
WVU 104	WV 104	NWNE	15	080S	210E	4304730022	5265	Federal	OW	P
WV 105	WV 105	SESE	10	080S	210E	4304730023	5265	Federal	OW	P
WVU 109	WV 109	SENE	15	080S	210E	4304730045	5265	Federal	OW	P
WVU 110	WV 110	SENE	14	080S	210E	4304730046	5265	Federal	OW	P
WVU 112	WV 112	SENE	15	080S	210E	4304730048	5265	Federal	OW	P
WVU 124	WV 124	NWSE	15	080S	210E	4304730745	5265	Federal	OW	P
WVU 126	WV 126	NWNE	21	080S	210E	4304730796	5265	Federal	WI	A
WV 128	WV 128	SESW	10	080S	210E	4304730798	5265	Federal	OW	P
WVU 132	WV 132	NWSW	15	080S	210E	4304730822	5265	Federal	OW	P
WVU 136	WV 136	NENW	21	080S	210E	4304731047	5265	Federal	OW	S
WV 137	WV 137	SENE	11	080S	210E	4304731523	5265	Federal	OW	P
WV 28-2	WV 28-2	NESW	11	080S	210E	4304731524	99990	Federal	WI	A
WVU 133	WV 133	SESW	15	080S	210E	4304731706	5265	Federal	OW	P
WVU 140	WV 140	NWNW	15	080S	210E	4304731707	5265	Federal	WI	A
WV 40-2	WV 40-2	NESE	10	080S	210E	4304731798	5265	Federal	WI	A
WVU 144	WV 144	SENE	10	080S	210E	4304731807	5265	Federal	OW	P
WV 143	WV 143	NWSE	10	080S	210E	4304731808	5265	Federal	WI	A
WVU 145	WV 145	NWNW	18	080S	220E	4304731820	14864	Federal	GW	P
WVU 121	WV 121	NWSW	14	080S	210E	4304731873	5265	Federal	OW	TA
WVU 135-2	WV 135-2	NENE	21	080S	210E	4304732016	5265	Federal	OW	P
WVU 130	WV 130	NWNW	22	080S	210E	4304732307	5265	Federal	OW	P
WVU 71-2	WV 71-2	SWSW	15	080S	210E	4304732449	5265	Federal	WI	A

QEP Uinta Basin (N2460) to QUESTAR E and P (N5085)
WONSITS VALLEY UNIT

4/30/2007 and 5/15/2007

Original Well Name	Well Name & No.	Q/Q	SEC	TWP	RNG	API	Entity	Lease	Well Type	Status
WVFU 119	WV 119	NWNW	21	080S	210E	4304732461	5265	Federal	OW	P
WVFU 120	WV 120	NENW	22	080S	210E	4304732462	5265	Federal	WI	A
WVFU 54 WG	WV 54 WG	SWSE	07	080S	220E	4304732821	14864	Federal	GW	P
WVFU 69 WG	WV 69 WG	SWNE	18	080S	220E	4304732829	14864	Federal	GW	P
WVFU 38 WG	WV 38 WG	SWNW	08	080S	220E	4304732831	14864	Federal	GW	P
WVFU 49 WG	WV 49 WG	SWSW	08	080S	220E	4304732832	14864	Federal	GW	P
WVFU 138 WG	WV 138 WG	SWNW	18	080S	220E	4304733054	14864	Federal	GW	P
WVFU 14 WG	WV 14 WG	SWSE	12	080S	210E	4304733070	14864	Federal	GW	P
WVFU 11 WG	WV 11 WG	SWNE	12	080S	210E	4304733085	14864	Federal	GW	P
WVFU 81 WG	WV 81 WG	SWNW	24	080S	210E	4304733086	14864	Federal	GW	P
WVFU 146 WG	WV 146 WG	NWNW	19	080S	220E	4304733128	14864	Federal	GW	P
WVFU 1W-14-8- 21	WV 1W-14-8- 21	NENE	14	080S	210E	4304733220	14864	Federal	GW	P
WVFU 5W-13- 8-21	WV 5W-13- 8-21	SWNW	13	080S	210E	4304733221	14864	Federal	GW	P
WVFU 46 WG	WVFU 46 WG	NESE	07	080S	220E	4304733241	14864	Federal	GW	P
WVFU 9W-14-8-21	WV 9W-14-8-21	NESE	14	080S	210E	4304733269	14864	Federal	GW	P
WVFU 7W-13-8-21	WV 7W-13-8-21	SWNE	13	080S	210E	4304733270	14864	Federal	GW	P
WVFU 1W-18-8-22	WV 1W-18-8-22	NENE	18	080S	220E	4304733294	14864	Federal	GW	P
WVFU 11W-8-8-22	WV 11W-8-8-22	NESW	08	080S	220E	4304733295	14864	Federal	GW	P
WVFU 3W-8-8-22	WV 3W-8-8-22	NENW	08	080S	220E	4304733493	14864	Federal	GW	S
WVFU 5W-7-8-22	WV 5W-7-8-22	SWNW	07	080S	220E	4304733494	14864	Federal	GW	P
WVFU 11W-7-8-22	WV 11W-7-8-22	NESW	07	080S	220E	4304733495	14864	Federal	GW	P
WVFU 13W-7-8-22	WV 13W-7-8-22	SWSW	07	080S	220E	4304733496	14864	Federal	GW	P
WVFU 1W-7-8-22	WV 1W-7-8-22	NENE	07	080S	220E	4304733501	14864	Federal	GW	P
WVFU 3W-7-8-22	WV 3W-7-8-22	NENW	07	080S	220E	4304733502	14864	Federal	GW	P
WV 7WRG-7-8-22	WV 7WRG-7-8-22	SWNE	07	080S	220E	4304733503	5265	Federal	OW	P
WVFU 16W-9-8-21	WV 16W-9-8-21	SESE	09	080S	210E	4304733529	14864	Federal	GW	P
WVFU 1W-12-8-21	WV 1W-12-8-21	NENE	12	080S	210E	4304733531	14864	Federal	GW	P
WVFU 1W-13-8-21	WV 1W-13-8-21	NENE	13	080S	210E	4304733532	14864	Federal	GW	P
WVFU 3W-18-8-22	WV 3W-18-8-22	NENW	18	080S	220E	4304733533	14864	Federal	GW	P
WVFU 9W-12-8-21	WV 9W-12-8-21	NESE	12	080S	210E	4304733534	14864	Federal	GW	P
WVFU 11W-12-8-21	WV 11W-12-8-21	NESW	12	080S	210E	4304733535	14864	Federal	GW	P
WVFU 11W-13-8-21	WV 11W-13-8-21	NESW	13	080S	210E	4304733536	14864	Federal	GW	P
WVFU 13W-12-8-21	WV 13W-12-8-21	SWSW	12	080S	210E	4304733537	14864	Federal	GW	S
WVFU 13W-18-8-22	WV 13W-18-8-22	SWSW	18	080S	220E	4304733538	14864	Federal	GW	P
WVFU 16G-9-8-21	WV 16G-9-8-21	SESE	09	080S	210E	4304733565	5265	Federal	OW	P
WVFU 1W-21-8-21	WV 1W-21-8-21	NENE	21	080S	210E	4304733602	14864	Federal	GW	P
WVFU 3W-13-8-21	WV 3W-13-8-21	NENW	13	080S	210E	4304733603	14864	Federal	GW	S
WVFU 3W-22-8-21	WV 3W-22-8-21	NENW	22	080S	210E	4304733604	14864	Federal	GW	P
WVFU 3W-24-8-21	WV 3W-24-8-21	NENW	24	080S	210E	4304733605	14864	Federal	GW	P
WVFU 13W-13-8-21	WV 13W-13-8-21	SWSW	13	080S	210E	4304733606	14864	Federal	GW	S
WVFU 13W-14-8-21	WV 13W-14-8-21	SWSW	14	080S	210E	4304733607	14864	Federal	GW	P

QEP Uinta Basin (N2460) to QUESTAR E and P (N5085)
WONSITS VALLEY UNIT

4/30/2007 and 5/15/2007

Original Well Name	Well Name & No.	Q/Q	SEC	TWP	RNG	API	Entity	Lease	Well Type	Status
WVFU 15W-13-8-21	WV 15W-13-8-21	SWSE	13	080S	210E	4304733608	14864	Federal	GW	S
WVFU 1W-24-8-21	WV 1W-24-8-21	NENE	24	080S	210E	4304733613	14864	Federal	GW	P
WVFU 11W-18-8-22	WV 11W-18-8-22	NESW	18	080S	220E	4304733626	14864	Federal	GW	P
WV 2W-10-8-21	WV 2W-10-8-21	NWNE	10	080S	210E	4304733655	14864	Federal	GW	P
WV 4W-11-8-21	WV 4W-11-8-21	NWNW	11	080S	210E	4304733657	14864	Federal	GW	P
WV 12W-10-8-21	WV 12W-10-8-21	NWSW	10	080S	210E	4304733659	14864	Federal	GW	S
WV 12G-10-8-21	WV 12G-10-8-21	NWSW	10	080S	210E	4304733660	5265	Federal	OW	P
WVFU 15W-9-8-21	WV 15W-9-8-21	SWSE	09	080S	210E	4304733661	14864	Federal	GW	P
WVFU 15G-9-8-21	WV 15G-9-8-21	SWSE	09	080S	210E	4304733662	5265	Federal	OW	P
WVFU 2W-13-8-21	WV 2W-13-8-21	NWNE	13	080S	210E	4304733791	14864	Federal	GW	P
WVFU 6W-13-8-21	WV 6W-13-8-21	SENE	13	080S	210E	4304733792	14864	Federal	GW	P
WVFU 8W-13-8-21	WV 8W-13-8-21	SENE	13	080S	210E	4304733793	14864	Federal	GW	P
WV 10W-1-8-21	WV 10W-1-8-21	NWSE	01	080S	210E	4304733794	14864	Federal	GW	TA
WVFU 10W-13-8-21	WV 10W-13-8-21	NWSE	13	080S	210E	4304733795	14864	Federal	GW	P
WVFU 12W-7-8-22	WV 12W-7-8-22	NWSW	07	080S	220E	4304733808	14864	Federal	GW	P
WVFU 6W-8-8-22	WV 6W-8-8-22	SENE	08	080S	220E	4304733811	14864	Federal	GW	P
WVFU 7W-8-8-22	WV 7W-8-8-22	SWNE	08	080S	220E	4304733812	14864	Federal	GW	S
WVFU 10W-7-8-22	WV 10W-7-8-22	NWSE	07	080S	220E	4304733813	14864	Federal	GW	P
WVFU 12W-8-8-22	WV 12W-8-8-22	NWSW	08	080S	220E	4304733815	14864	Federal	GW	P
WVFU 14W-7-8-22	WV 14W-7-8-22	SESW	07	080S	220E	4304733816	14864	Federal	GW	P
WVFU 16W-7-8-22	WV 16W-7-8-22	SESE	07	080S	220E	4304733817	14864	Federal	GW	P
WVFU 6W-7-8-22	WV 6W-7-8-22	SENE	07	080S	220E	4304733828	14864	Federal	GW	P
WVFU 6W-18-8-22	WV 6W-18-8-22	SENE	18	080S	220E	4304733842	14864	Federal	GW	P
WVFU 6WC-18-8-22	WV 6WC-18-8-22	SENE	18	080S	220E	4304733843	14864	Federal	GW	P
WVFU 6WD-18-8-22	WV 6WD-18-8-22	SENE	18	080S	220E	4304733844	14864	Federal	GW	P
WVFU 5W-23-8-21	WV 5W-23-8-21	SWNW	23	080S	210E	4304733860	14864	Federal	GW	P
WVFU 7W-23-8-21	WV 7W-23-8-21	SWNE	23	080S	210E	4304733861	14864	Federal	GW	P
WVFU 8W-12-8-21	WV 8W-12-8-21	SENE	12	080S	210E	4304733862	14864	Federal	GW	P
WVFU 10W-12-8-21	WV 10W-12-8-21	NWSE	12	080S	210E	4304733863	14864	Federal	GW	P
WVFU 14W-12-8-21	WV 14W-12-8-21	SESW	12	080S	210E	4304733864	14864	Federal	GW	P
WVFU 16W-12-8-21	WV 16W-12-8-21	SESE	12	080S	210E	4304733865	14864	Federal	GW	P
WVFU 1W-15-8-21	WV 1W-15-8-21	NENE	15	080S	210E	4304733902	14864	Federal	GW	S
WVFU 1W-22-8-21	WV 1W-22-8-21	NENE	22	080S	210E	4304733903	14864	Federal	GW	P
WVFU 1W-23-8-21	WV 1W-23-8-21	NENE	23	080S	210E	4304733904	14864	Federal	GW	P
WV 6W-11-8-21	WV 6W-11-8-21	SENE	11	080S	210E	4304733906	14864	Federal	GW	P
WVFU 7W-24-8-21	WV 7W-24-8-21	SWNE	24	080S	210E	4304733908	14864	Federal	GW	P
WV 10W-11-8-21	WV 10W-11-8-21	NWSE	11	080S	210E	4304733910	14864	Federal	GW	P
WVFU 11W-15-8-21	WV 11W-15-8-21	NESW	15	080S	210E	4304733911	14864	Federal	GW	P
WV 13W-11-8-21	WV 13W-11-8-21	SWSW	11	080S	210E	4304733913	14864	Federal	GW	S
WVFU 13W-15-8-21	WV 13W-15-8-21	SWSW	15	080S	210E	4304733914	14864	Federal	GW	P
WV 15W-10-8-21	WV 15W-10-8-21	SWSE	10	080S	210E	4304733916	14864	Federal	GW	P

QEP Uinta Basin (N2460) to QUESTAR E and P (N5085)
WONSITS VALLEY UNIT

4/30/2007 and 5/15/2007

Original Well Name	Well Name & No.	Q/Q	SEC	TWP	RNG	API	Entity	Lease	Well Type	Status
WVFU 15W-15-8-21	WV 15W-15-8-21	SWSE	15	080S	210E	4304733917	14864	Federal	GW	P
WVFU 5W-14-8-21	WV 5W-14-8-21	SWNW	14	080S	210E	4304733953	14864	Federal	GW	P
WVFU 7W-14-8-21	WV 7W-14-8-21	SWNE	14	080S	210E	4304733955	14864	Federal	GW	P
WV 8W-11-8-21	WV 8W-11-8-21	SENE	11	080S	210E	4304733957	14864	Federal	GW	S
WVFU 8W-14-8-21	WV 8W-14-8-21	SENE	14	080S	210E	4304733958	14864	Federal	GW	P
WVFU 9W-15-8-21	WV 9W-15-8-21	NESE	15	080S	210E	4304733959	14864	Federal	GW	P
WVFU 12W-13-8-21	WV 12W-13-8-21	NWSW	13	080S	210E	4304733961	14864	Federal	GW	P
WVFU 14W-13-8-21	WV 14W-13-8-21	SESW	13	080S	210E	4304733962	14864	Federal	GW	P
WVFU 15W-14-8-21	WV 15W-14-8-21	SWSE	14	080S	210E	4304733963	14864	Federal	GW	P
WVFU 2W-18-8-22	WV 2W-18-8-22	NWNE	18	080S	220E	4304733986	14864	Federal	GW	P
WV 8W-18-8-22	WV 8W-18-8-22	SENE	18	080S	220E	4304733989	14864	Federal	GW	P
WVFU 10W-18-8-22	WV 10W-18-8-22	NWSE	18	080S	220E	4304733991	14864	Federal	GW	P
WVFU 12W-18-8-22	WV 12W-18-8-22	NWSW	18	080S	220E	4304733993	14864	Federal	GW	P
WV 14W-18-8-22	WV 14W-18-8-22	SESW	18	080S	220E	4304733995	14864	Federal	GW	P
WVFU 8W-1-8-21	WV 8W-1-8-21	SENE	01	080S	210E	4304734009	14864	Federal	GW	DRL
WV 4W-17-8-22	WV 4W-17-8-22	NWNW	17	080S	220E	4304734038	14864	Federal	GW	P
WV 12G-1-8-21	WV 12G-1-8-21	NWSW	01	080S	210E	4304734108	5265	Federal	OW	TA
WV 2W-14-8-21	WV 2W-14-8-21	NWNE	14	080S	210E	4304734140	14864	Federal	GW	P
GH 2W-21-8-21	GH 2W-21-8-21	NWNE	21	080S	210E	4304734141	14864	Federal	GW	P
WV 2W-23-8-21	WV 2W-23-8-21	NWNE	23	080S	210E	4304734142	14864	Federal	GW	P
GH 3W-21-8-21	WV 3W-21-8-21	NENW	21	080S	210E	4304734143	14864	Federal	GW	P
WV 4W-13-8-21	WV 4W-13-8-21	NWNW	13	080S	210E	4304734144	14864	Federal	GW	P
GH 4W-21-8-21	WV 4W-21-8-21	NWNW	21	080S	210E	4304734145	14864	Federal	GW	P
WV 4W-22-8-21	WV 4W-22-8-21	NWNW	22	080S	210E	4304734146	14864	Federal	GW	P
WV 16W-11-8-21	WV 16W-11-8-21	SESE	11	080S	210E	4304734155	14864	Federal	GW	TA
WV 3W-19-8-22	WV 3W-19-8-22	NENW	19	080S	220E	4304734187	14864	Federal	GW	P
WV 4W-23-8-21	WV 4W-23-8-21	NWNW	23	080S	210E	4304734188	14864	Federal	GW	P
WV 6W-23-8-21	WV 6W-23-8-21	SENE	23	080S	210E	4304734189	14864	Federal	GW	P
WV 2W-15-8-21	WV 2W-15-8-21	NWNE	15	080S	210E	4304734242	14864	Federal	GW	P
WV 2W-22-8-21	WV 2W-22-8-21	NWNE	22	080S	210E	4304734243	14864	Federal	GW	P
WV 4W-14-8-21	WV 4W-14-8-21	NWNW	14	080S	210E	4304734244	14864	Federal	GW	P
WV 6W-12-8-21	WV 6W-12-8-21	SENE	12	080S	210E	4304734245	5265	Federal	GW	S
WV 7W-15-8-21	WV 7W-15-8-21	SWNE	15	080S	210E	4304734246	14864	Federal	GW	P
WV 8W-15-8-21	WV 8W-15-8-21	SENE	15	080S	210E	4304734247	14864	Federal	GW	P
WV 12W-12-8-21	WV 12W-12-8-21	NWSW	12	080S	210E	4304734248	14864	Federal	GW	S
WV 14W-15-8-21	WV 14W-15-8-21	SESW	15	080S	210E	4304734249	14864	Federal	GW	P
WV 16W-10-8-21	WV 16W-10-8-21	SESE	10	080S	210E	4304734250	14864	Federal	GW	P
WV 16W-15-8-21	WV 16W-15-8-21	SESE	15	080S	210E	4304734251	14864	Federal	GW	P
WV 2W-12-8-21	WV 2W-12-8-21	NWNE	12	080S	210E	4304734265	14864	Federal	GW	OPS
WV 3W-12-8-21	WV 3W-12-8-21	NENW	12	080S	210E	4304734267	14864	Federal	GW	OPS
WV 4W-12-8-21	WV 4D-12-8-21	NWNW	12	080S	210E	4304734268	12436	Federal	GW	DRL

QEP Uinta Basin (N2460) to QUESTAR E and P (N5085)
WONSITS VALLEY UNIT

4/30/2007 and 5/15/2007

Original Well Name	Well Name & No.	Q/Q	SEC	TWP	RNG	API	Entity	Lease	Well Type	Status
WV 5W-12-8-21	WV 5W-12-8-21	SWNW	12	080S	210E	4304734270	14864	Federal	GW	OPS
WV 6W-14-8-21	WV 6W-14-8-21	SENE	14	080S	210E	4304734271	14864	Federal	GW	P
WV 9W-11-8-21	WV 9W-11-8-21	NESE	11	080S	210E	4304734274	14864	Federal	GW	DRL
WV 10W-14-8-21	WV 10W-14-8-21	NWSE	14	080S	210E	4304734275	14864	Federal	GW	S
WV 11W-14-8-21	WV 11W-14-8-21	NESW	14	080S	210E	4304734277	14864	Federal	GW	P
WV 12W-14-8-21	WV 12W-14-8-21	NWSW	14	080S	210E	4304734279	14864	Federal	GW	S
WV 14M-11-8-21	WV 14M-11-8-21	SESW	11	080S	210E	4304734280	14864	Federal	GW	P
WV 14W-14-8-21	WV 14W-14-8-21	SESW	14	080S	210E	4304734281	14864	Federal	GW	P
WV 16W-14-8-21	WV 16G-14-8-21	SESE	14	080S	210E	4304734283	5265	Federal	OW	S
WV 3MU-15-8-21	WV 3MU-15-8-21	NENW	15	080S	210E	4304734289	14864	Federal	GW	P
WV 4MU-15-8-21	WV 4MU-15-8-21	NWNW	15	080S	210E	4304734291	14864	Federal	GW	P
WV 5MU-15-8-21	WV 5MU-15-8-21	SWNW	15	080S	210E	4304734293	14864	Federal	GW	P
WV 6W-15-8-21	WV 6W-15-8-21	SENE	15	080S	210E	4304734294	14864	Federal	GW	P
WV 10W-15-8-21	WV 10W-15-8-21	NWSE	15	080S	210E	4304734295	14864	Federal	GW	P
WVU 4W-24-8-21	WV 4W-24-8-21	NWNW	24	080S	210E	4304734330	14864	Federal	GW	P
WV 8M-23-8-21	WV 8M-23-8-21	SENE	23	080S	210E	4304734339	14864	Federal	GW	P
WVU 8W-24-8-21	WV 8W-24-8-21	SENE	24	080S	210E	4304734340	14864	Federal	GW	P
WV 2W-8-8-22	WV 2W-8-8-22	NWNE	08	080S	220E	4304734468	14864	Federal	GW	P
WV 8W-7-8-22	WV 8W-7-8-22	SENE	07	080S	220E	4304734469	14864	Federal	GW	S
WV 8W-22-8-21	WV 8W-22-8-21	SENE	22	080S	210E	4304734564	14864	Federal	GW	P
WV 3G-8-8-22	WV 3G-8-8-22	NENW	08	080S	220E	4304734596	5265	Federal	OW	TA
WV 14MU-10-8-21	WV 14MU-10-8-21	SESW	10	080S	210E	4304735879	14864	Federal	GW	P
WV 13MU-10-8-21	WV 13MU-10-8-21	SWSW	10	080S	210E	4304736305	14864	Federal	GW	P
WV 3DML-13-8-21	WV 3D-13-8-21	SENE	13	080S	210E	4304737923	14864	Federal	GW	DRL
WV 14DML-12-8-21	WV 14DML-12-8-21	SESW	12	080S	210E	4304737924	14864	Federal	GW	DRL
WV 15AML-12-8-21	WV 15AML-12-8-21	NWSE	12	080S	210E	4304737925		Federal	GW	APD
WV 13DML-10-8-21	WV 13DML-10-8-21	SWSW	10	080S	210E	4304737926	14864	Federal	GW	P
WV 4DML-15-8-21	WV 4DML-15-8-21	NWNW	15	080S	210E	4304737927	14864	Federal	GW	DRL
WV 13AD-8-8-22	WV 13AD-8-8-22	SWSW	08	080S	220E	4304737945		Federal	GW	APD
WV 11AML-14-8-21	WV 11AD-14-8-21	NWSE	14	080S	210E	4304738049	15899	Federal	GW	APD
WV 11DML-14-8-21	WV 11DML-14-8-21	SESW	14	080S	210E	4304738050		Federal	GW	APD
WV 4AML-19-8-22	WV 4AML-19-8-22	NWNW	19	080S	220E	4304738051		Federal	GW	APD
WV 13CML-8-8-22	WV 13CML-8-8-22	SWSW	08	080S	220E	4304738431		Federal	GW	APD
WV 13BML-18-8-22	WV 13BML-18-8-22	SWSW	18	080S	220E	4304738432		Federal	GW	APD
WV 8BML-18-8-22	WV 8BML-18-8-22	E/NE	18	080S	220E	4304738433		Federal	GW	APD
WV 6ML-24-8-21	WV 6-24-8-21	SENE	24	080S	210E	4304738663		Federal	GW	APD
WV 2ML-24-8-21	WV 2ML-24-8-21	NWNE	24	080S	210E	4304738664		Federal	GW	APD
WV 1DML-13-8-21	WV 1DML-13-8-21	NENE	13	080S	210E	4304738733		Federal	GW	APD
WV 4DML-13-8-21	WV 4DML-13-8-21	NWNW	13	080S	210E	4304738734		Federal	GW	APD
WV 3AML-14-8-21	WV 3AML-14-8-21	NENW	14	080S	210E	4304738736		Federal	GW	APD
WV 16CML-14-8-21	WV 16C-14-8-21	SESE	14	080S	210E	4304738737		Federal	GW	APD

QEP Uinta Basin (N2460) to QUESTAR E and P (N5085)
WONSITS VALLEY UNIT

4/30/2007 and 5/15/2007

Original Well Name	Well Name & No.	Q/Q	SEC	TWP	RNG	API	Entity	Lease	Well Type	Status
WVU 21	WV 21	NENE	16	080S	210E	4304715452	99990	State	WI	A
WVU 32	WV 32	NENW	16	080S	210E	4304716513	5265	State	OW	P
WVU 72	WV 72	SWSW	16	080S	210E	4304720058	99990	State	WI	A
WVU 73	WV 73	NESE	16	080S	210E	4304720066	5265	State	WI	A
WVU 74	WV 74	SWSE	16	080S	210E	4304720078	5265	State	OW	P
WVU 75	WV 75	SWNE	16	080S	210E	4304720085	5265	State	OW	P
WVU 78	WV 78	NESW	16	080S	210E	4304720115	99990	State	WI	A
WVU 134	WV 134	SESE	16	080S	210E	4304731118	5265	State	OW	P
WVU 141	WV 141	NWSE	16	080S	210E	4304731609	5265	State	OW	P
WVU 127	WV 127	SENE	16	080S	210E	4304731611	5265	State	OW	P
WVU 142	WV 142	SESW	16	080S	210E	4304731612	5265	State	OW	P
WVUFU 9W-13-8-21	WV 9W-13-8-21	NESE	13	080S	210E	4304733223	14864	State	GW	S
WVUFU 2W-16-8-21	WV 2W-16-8-21	NWNE	16	080S	210E	4304733246	14864	State	GW	P
WVUFU 2G-16-8-21	WV 2G-16-8-21	NWNE	16	080S	210E	4304733247	5265	State	OW	P
WVUFU 6W-16-8-21	WV 6W-16-8-21	SENW	16	080S	210E	4304733527	14864	State	GW	P
WVUFU 6G-16-8-21	WV 6G-16-8-21	SENW	16	080S	210E	4304733564	5265	State	OW	P
WVUFU 16W-2-8-21	WV 16W-2-8-21	SESE	02	080S	210E	4304733645	5265	State	OW	S
WVUFU 9W-2-8-21	WV 9W-2-8-21	NESE	02	080S	210E	4304733648	14864	State	GW	P
WVUFU 12W-16-8-21	WV 12W-16-8-21	NWSW	16	080S	210E	4304733649	14864	State	GW	P
WVUFU 12G-16-8-21	WV 12G-16-8-21	NWSW	16	080S	210E	4304733650	5265	State	OW	P
WVUFU 16W-13-8-21	WV 16W-13-8-21	SESE	13	080S	210E	4304733796	14864	State	GW	P
WV 10G-2-8-21	WV 10G-2-8-21	NWSE	02	080S	210E	4304734035	5265	State	OW	P
WV 14G-2-8-21	WV 14G-2-8-21	SESW	02	080S	210E	4304734036	5265	State	OW	P
WV 13G-2-8-21	WV 13G-2-8-21	SWSW	02	080S	210E	4304734068	5265	State	OW	P
WV 5G-16-8-21	WV 5G-16-8-21	SWNW	16	080S	210E	4304734107	5265	State	OW	P
WV 11W-16-8-21	WV 11W-16-8-21	NESW	16	080S	210E	4304734190	14864	State	GW	P
WV 13W-16-8-21	WV 13W-16-8-21	SWSW	16	080S	210E	4304734191	14864	State	GW	P
WV 14W-16-8-21	WV 14W-16-8-21	SESW	16	080S	210E	4304734192	14864	State	GW	P
WV 15W-16-8-21	WV 15W-16-8-21	SWSE	16	080S	210E	4304734224	14864	State	GW	P
WV 16W-16-8-21	WV 16W-16-8-21	SESE	16	080S	210E	4304734225	14864	State	GW	P
WV 1MU-16-8-21	WV 1MU-16-8-21	NENE	16	080S	210E	4304734288	14864	State	GW	P
WV 3W-16-8-21	WV 3W-16-8-21	NENW	16	080S	210E	4304734290		State	GW	LA
WV 4W-16-8-21	WV 4W-16-8-21	NWNW	16	080S	210E	4304734292	12436	State	D	PA
WVU 5W-16-8-21	WV 5W-16-8-21	SWNW	16	080S	210E	4304734321	14864	State	GW	P
WV 7W-16-8-21	WV 7W-16-8-21	SWNE	16	080S	210E	4304734322	14864	State	GW	P
WV 8ML-16-8-21	WV 8ML-16-8-21	SENE	16	080S	210E	4304734323	14864	State	GW	P
WV 9W-16-8-21	WV 9W-16-8-21	NESE	16	080S	210E	4304734325	14864	State	GW	P
WV 10W-16-8-21	WV 10W-16-8-21	NWSE	16	080S	210E	4304734326	14864	State	GW	P
WV 12BML-16-8-21	WV 12BML-16-8-21	SWNW	16	080S	210E	4304737824	14864	State	GW	P
WV 12DML-16-8-21	WV 12D-16-8-21	NWSW	16	080S	210E	4304737870		State	GW	APD
WV 15CML-16-8-21	WV 15CML-16-8-21	SESW	16	080S	210E	4304737871	14864	State	GW	P

QEP Uinta Basin (N2460) to QUESTAR E and P (N5085)
WONSITS VALLEY UNIT

4/30/2007 and 5/15/2007

Original Well Name	Well Name & No.	Q/Q	SEC	TWP	RNG	API	Entity Lease	Well Type	Status
WV 15DML-16-8-21	WV 15DML-16-8-21	SWSE	16	080S	210E	4304737872	State	GW	APD
WV 16DML-13-8-21	WV 16DML-13-8-21	SESE	13	080S	210E	4304738735	State	GW	APD

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING


FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: see attached
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: see attached
		7. UNIT or CA AGREEMENT NAME: see attached
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____	8. WELL NAME and NUMBER: see attached	
2. NAME OF OPERATOR: QUESTAR EXPLORATION AND PRODUCTION COMPANY		9. API NUMBER: attached
3. ADDRESS OF OPERATOR: 1050 17th Street Suite 500 CITY Denver STATE CO ZIP 80265	PHONE NUMBER: (303) 308-3068	10. FIELD AND POOL, OR WILDCAT:
4. LOCATION OF WELL FOOTAGES AT SURFACE: attached		COUNTY: Uintah
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		STATE: UTAH


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: <u>1/1/2007</u>	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Operator Name Change</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	


12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Effective January 1, 2007 operator of record, QEP Uinta Basin, Inc., will hereafter be known as QUESTAR EXPLORATION AND PRODUCTION COMPANY. This name change involves only an internal corporate name change and no third party change of operator is involved. The same employees will continue to be responsible for operations of the properties described on the attached list. All operations will continue to be covered by bond numbers:
 Federal Bond Number: 965002976 (BLM Reference No. ESB000024)
 Utah State Bond Number: 965003033
 Fee Land Bond Number: 965003033
 Current operator of record, QEP UINTA BASIN, INC., hereby resigns as operator of the properties as described on the attached list.


 Jay B. Neese, Executive Vice President, QEP Uinta Basin, Inc.

Successor operator of record, QUESTAR EXPLORATION AND PRODUCTION COMPANY, hereby assumes all rights, duties and obligations as operator of the properties as described on the attached list


 Jay B. Neese, Executive Vice President
 Questar Exploration and Production Company

NAME (PLEASE PRINT) <u>Debra K. Stanberry</u>	TITLE <u>Supervisor, Regulatory Affairs</u>
SIGNATURE 	DATE <u>3/16/2007</u>

(This space for State use only)

RECEIVED
APR 19 2007

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: see attached
2. NAME OF OPERATOR: QUESTAR EXPLORATION AND PRODUCTION COMPANY		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: see attached
3. ADDRESS OF OPERATOR: 1050 17th Street Suite 500 <small>CITY</small> Denver <small>STATE</small> CO <small>ZIP</small> 80265		7. UNIT or CA AGREEMENT NAME: see attached
4. LOCATION OF WELL FOOTAGES AT SURFACE: attached		8. WELL NAME and NUMBER: see attached
PHONE NUMBER: (303) 308-3068		9. API NUMBER: attached
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		10. FIELD AND POOL, OR WILDCAT:
		COUNTY: Uintah
		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: <u>1/1/2007</u>	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Well Name Changes</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

PER THE ATTACHED LIST OF WELLS, QUESTAR EXPLORATION AND PRODUCTION COMPANY REQUESTS THAT THE INDIVIDUAL WELL NAMES BE UPDATED IN YOUR RECORDS.

NAME (PLEASE PRINT) <u>Debra K. Stanberry</u>	TITLE <u>Supervisor, Regulatory Affairs</u>
SIGNATURE	DATE <u>4/17/2007</u>

(This space for State use only)

RECEIVED

APR 19 2007

DIV. OF OIL, GAS & MINING



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155



IN REPLY REFER TO
3180
UT-922

April 23, 2007

Questar Exploration and Production Company
1050 17th Street, Suite 500
Denver, Colorado 80265

Re: Wonsits Valley Unit
Uintah County, Utah

Gentlemen:

On April 12, 2007, we received an indenture dated April 6, 2007, whereby QEP Uinta Basin, Inc. resigned as Unit Operator and Questar Exploration and Production Company was designated as Successor Unit Operator for the Wonsits Valley Unit, Uintah County, Utah.

This indenture was executed by all required parties and the signatory parties have complied with Sections 5 and 6 of the unit agreement. The instrument is hereby approved effective April 23, 2007. In approving this designation, the Authorized Officer neither warrants nor certifies that the designated party has obtained all required approval that would entitle it to conduct operations under the Wonsits Valley Unit Agreement.

Your nationwide oil and gas bond No. ESB000024 will be used to cover all federal operations within the Wonsits Valley Unit.

It is requested that you notify all interested parties of the change in unit operator. Copies of the approved instruments are being distributed to the appropriate federal offices, with one copy returned herewith.

Sincerely,

/s/ Greg J. Noble

Greg J. Noble
Acting Chief, Branch of Fluid Minerals

Enclosure

bcc: Field Manager - Vernal (w/enclosure)
SITLA
Division of Oil, Gas & Mining
File - Wonsits Valley Unit (w/enclosure)
Agr. Sec. Chron
Reading File
Central Files

UT922:TAThompson:tt:4/23/07

RECEIVED

APR 30 2007

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 3

APPLICATION FOR PERMIT TO DRILL		5. MINERAL LEASE NO: ML-3084	6. SURFACE: TRIBAL
1A. TYPE OF WORK: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN		7. IF INDIAN, ALLOTTEE OR TRIBE NAME N/A	
B. TYPE OF WELL <input type="checkbox"/> OIL <input checked="" type="checkbox"/> GAS OTHER _____ <input checked="" type="checkbox"/> SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE		8. UNIT OF CA AGREEMENT NAME: WONSITS VALLEY UNIT	
2. NAME OF OPERATOR: QEP UINTA BASIN, INC.		9. WELL NAME and NUMBER: WV 16DML-13-8-21	
3. ADDRESS OF OPERATOR: 1571 E. 1700 S. CITY VERNAL STATE UT ZIP 84078		10. FIELD AND POOL, OR WILDCAT: WONSITS VALLEY	
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 419' FSL 265' FEL AT PROPOSED PRODUCING ZONE: SAME		11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 13 8S 21E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 10 + \ - MILES FROM REDWASH, UTAH		12. COUNTY: UINTAH	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 265' +/-	16. NUMBER OF ACRES IN LEASE: 2480	17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 40	
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) 1000 +/-	19. PROPOSED DEPTH 11,200'	20. BOND DESCRIPTION: 965003033	
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 4885.6' GL	22. APPROXIMATE DATE WORK WILL START: ASAP	23. ESTIMATED DURATION: 20 DAYS	

24 PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT			SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT
20"	14" Cond			40'	SEE 8-POINT DRILLING
12 1/4"	9 5/8"	J-55	36 lb/ft (new) ST&C	450'	
8 3/4"	7"	J-55	26 lb/ft (new) LT&C	7,800'	
6 1/8"	4 1/2"	P-110	11.60 lb/ft (new) LT&C	11,200'	

25 ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERATION GENERAL RULES:

- WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER COMPLETE DRILLING PLAN
 EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNI

NAME (PLEASE PRINT) Jan Nelson TITLE Regulatory Affairs
SIGNATURE *Jan Nelson* DATE 2/14/07

(This space for State use only)

API NUMBER ASSIGNED: 43-047-38735 APPROVAL: _____

(11/2001)

Approved by the Utah Division of Oil, Gas and Mining
(See Instruction on Reverse Side)

RECEIVED
FEB 20 2007
DIV. OF OIL, GAS & MINING

Date: 03-21-07
By: *[Signature]*

CONFIDENTIAL

T8S, R21E, S.L.B.&M.

R
21
E

R
22
E

1963 Brass Cap
0.8' High

S89°12'53"W - 2658.50' (Meas.)

S89°18'08"W - 2656.61' (Meas.)

N00°42'16"W - 2653.34' (Meas.)

N00°46'08"W - 2654.67' (Meas.)

S00°46'05"E - 2634.38' (Meas.)

N00°54'33"W
2661.30' (Meas.)

WV #16DML-13-8-21
Elev. Ungraded Ground = 4887'

1967 Brass Cap
1.0' High, Small
Pile of Stones

N89°15'38"E - 2662.87' (Meas.)

S89°51'53"W - 2661.95' (Meas.)

QUESTAR EXPLR. & PROD.


Well location, WV #16DML-13-8-21, located as shown in the SE 1/4 SE 1/4 of Section 13, T8S, R21E, S.L.B.&M., Uintah County, Utah.

BASIS OF ELEVATION

BENCH MARK 20EAM LOCATED IN THE SE 1/4 OF SECTION 35, T8S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4697 FEET.

BASIS OF BEARINGS


BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

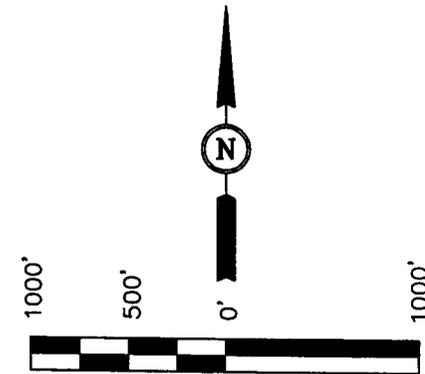

SCALE

CERTIFIED

THIS IS TO CERTIFY THAT THE ABOVE WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME, UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

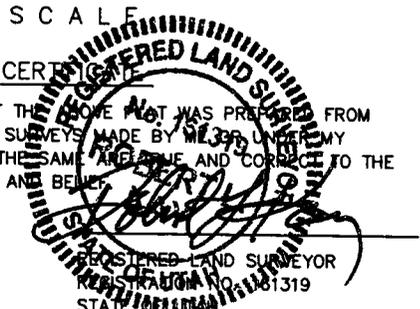

LEGEND:

└ = 90° SYMBOL

● = PROPOSED WELL HEAD.

▲ = SECTION CORNERS LOCATED.

(NAD 83)

LATITUDE = 40°07'03.66" (40.117683)

LONGITUDE = 109°26'37.96" (109.443878)

(NAD 27)

LATITUDE = 40°07'03.79" (40.117719)

LONGITUDE = 109°26'35.49" (109.443192)

UINTAH ENGINEERING & LAND SURVEYING

85 SOUTH 200 EAST - VERNAL, UTAH 84078

(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 05-23-06	DATE DRAWN: 06-01-06
PARTY D.A. T.A. L.K.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE QUESTAR EXPLR. & PROD.	

Additional Operator Remarks

QEP Uinta Basin, Inc. proposes to drill a well to 11,200' to test the Mesa Verde. If productive, casing will be run and the well completed. If dry, the well will be plugged and abandoned as per BLM and State of Utah requirement.

See Onshore Order No. 1 attached

Please be advised that QEP Uinta Basin, Inc. agrees to be responsible under the terms and conditions of the lease for the operations conducted upon the lease lands.

Bond coverage for this well is provided by Bond No. 965003033. The principal is QEP Uinta Basin, Inc. via surety as consent as provided for the 43 CFR 3104.2.

ONSHORE OIL & GAS ORDER NO. 1

QEP Uinta Basin, Inc.

WV 16DML-13-8-21

DRILLING PROGRAM

ONSHORE OIL & GAS ORDER NO. 1

Approval of Operations on Onshore
Federal Oil and Gas Leases

All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas No. 1, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

1. **Formation Tops**

The estimated tops of important geologic markers are as follows:

<u>Formation</u>	<u>Depth, TVD</u>
Uinta	Surface
Green River	2,569'
Wasatch	5,844'
Mesaverde	8,819'
Sego	11,134'
TD	11,200'

2. **Anticipated Depths of Oil Gas Water and Other Mineral Bearing Zones**

The estimated depths at which the top and bottom of the anticipated water, oil, gas, or other mineral bearing formations are expected to be encountered are as follows:

<u>Substance</u>	<u>Formation</u>	<u>Depth, TVD</u>
Gas	Wasatch	5,844'
Gas	Mesaverde	8,819'

All fresh water and prospectively valuable minerals encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

All water shows and water-bearing sands will be reported to the BLM in Vernal, Utah. Copies of State of Utah form OGC-8-X are acceptable. If flows are detected, samples will be submitted to the BLM along with any water analyses conducted. Fresh water will be obtained from Wonsits Valley water right # A36125 (which was filed on May 7, 1964,) or Red Wash water right # 49-2153 (which was filed on March 25, 1960). It was determined by the Fish and Wildlife Service that any water right number filed before 1989 is not depleting to the Upper Colorado River System, to supply fresh water for drilling purposes.

DRILLING PROGRAM

All water resulting from drilling operations will be disposed of at Red Wash Central Battery Disposal Site; SWSE, Section 27, T7S, R23E or Wonsits Valley Disposal Site; SWNW, Section 12, T8S, R21E.

3. Operator's Specification for Pressure Control Equipment:

- A. 5,000 psi W.P. Double Gate BOP, 5,000 psi annular (schematic attached)
- B. Functional test daily
- C. All casing strings shall be pressure tested (0.22 psi/foot or 1500 psi, whichever is greater) prior to drilling the plug after cementing; test pressure shall not exceed the internal yield pressure of the casing.
- D. Ram type preventers and associated equipment shall be tested to approved stack working pressure if isolated by test plug or to 50 percent of internal yield pressure of casing whichever is less. BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc..., for a 5M system and individual components shall be operable as designed.

4. Casing Program

Hole Size	Csg. Size	Top (MD)	Bottom (MD)	Wt.	Grade	Thread	Cond.
20"	14"	sfc	40'	Steel	Cond.	None	Used
12-1/4"	9-5/8"	sfc	450'	36.0	J-55	STC	New
8-3/4"	7"	sfc	7,800'	26.0	J-55	LTC	New
6-1/8"	4-1/2"	sfc	11,200'	11.6	P-110	LTC	New

Casing Strengths:				Collapse	Burst	Tensile (minimum)
9-5/8"	36.0 lb.	J-55	STC	2,020 psi	3,520 psi	394,000 lb.
7"	26.0 lb.	J-55	LTC	4,320 psi	4,980 psi	367,000 lb.
4-1/2"	11.6 lb.	P-110	LTC	7,580 psi	10,690 psi	279,000 lb.

DRILLING PROGRAM

5. Auxiliary Equipment

- A. Kelly Cock – yes
- B. Float at the bit – no
- C. Monitoring equipment on the mud system – visually and/or PVT/Flow Show
- D. Full opening safety valve on the rig floor – yes
- E. Rotating Head – yes
- F. If drilling with air the following will be used:
- G. The blooie line shall be at least 6” in diameter and extend at least 100’ from the well bore into the reserve/blooie pit.
- H. Blooie line ignition shall be provided by a continuous pilot (ignited when drilling below 500’).
- I. Compressor shall be tied directly to the blooie line through a manifold.
- J. A mister with a continuous stream of water shall be installed near the end of the blooie lines for dust suppression.

Surface hole will be drilled with air, air/mist, foam, or mud depending on hole conditions. Drilling below surface casing will be with water based drilling fluids consisting primarily of fresh water, bentonite, lignite, caustic, lime, soda ash and polymers. No chromates will be used. It is not intended to use oil in the mud, however, in the event it is used, oil concentration will be less than 4% by volume. Maximum anticipated mud weight is 11.5 ppg.

No minimum quantity of weight material will be required to be kept on location.

PVT/Flow Show will be used from base of surface casing to TD.

Gas detector will be used from surface casing depth to TD.

DRILLING PROGRAM

6. **Testing, logging and coring program**

- A. Cores – none anticipated
- B. DST – none anticipated
- C. Logging – Mud Logging – 1500' to TD
GR-SP-Induction
Neutron Density
- D. Formation and Completion Interval: Green River/Wasatch/Mesaverde interval, final determination of completion will be made by analysis of logs.
Stimulation: Stimulation will be designed for the particular area of interest as encountered.

7. **Cementing Program**

14" Conductor:

Cement to surface with construction cement.

9-5/8" Surface Casing: sfc - 450' (MD)

Lead/Tail Slurry: 0' – 450'. 240 sks (280 cu ft) Premium AG cement + 2% CaCl₂ + 0.25 lb/sk celloflake. Slurry wt: 15.8 ppg, Slurry yield: 1.17 ft³/sk, Slurry volume: 12-1/4" hole + 100% excess.

7" Intermediate Casing: sfc - 7,800' (MD)

Lead Slurry: 0' – 5,400'. 310 sks (1200 cu ft) Halliburton Hi-Fill cement. Slurry wt: 11.0 ppg, Slurry yield: 3.86 ft³/sk, Slurry volume: 8-3/4" hole + 50% excess in open hole section.

Tail Slurry: 5,400' – 7,800'. 435 sks (540 cu ft) of 50/50 Poz Premium AG + 2.0% Bentonite + 0.6% Halad (R)-322 fluid loss + 2.0% Microbond M expander + 5% salt + 0.25 lb/sk Flocele. Slurry wt: 14.35 ppg, Slurry yield: 1.24 ft³/sk, Slurry volume: 8-3/4" hole + 50% excess.

4-1/2" Production Casing: sfc - 11,200' (MD)

Lead Slurry: 0' - 5,400'. 150 sks (575 cu ft) Halliburton Hi-Fill cement + 16% Bentonite + 0.75% Econolite + 3% salt + 0.8% HR-7 retarder. Slurry wt: 11.0 ppg, Slurry yield: 3.84 ft³/sk, Slurry volume: 4-1/2" casing inside 7" casing.

Tail Slurry: 5,400' – 11,200'. 700 sks (870 cu ft) of 50/50 Poz Premium AG + 2.0% Bentonite + 0.6% Halad (R)-322 fluid loss + 2.0% Microbond M expander + 5% salt + 0.2% HR-5 retarder + 0.25 lb/sk Flocele. Slurry wt: 14.35 ppg, Slurry yield: 1.24 ft³/sk, Slurry volume: 6-1/8" hole + 20% excess in open hole section.

ONSHORE OIL & GAS ORDER NO. 1
QEP Uinta Basin, Inc.
WV 16DML-13-8-21

DRILLING PROGRAM


*Final cement volumes to be calculated from caliper log with an attempt to be made to circulate cement to the surface. A bond log will be run across the zone of interest and across zones as required by the authorized officer to insure protection of natural resources.


8. Anticipated Abnormal Pressures and Temperatures, Other Potential Hazards

No abnormal temperatures or pressures are anticipated. No H₂S has been encountered in or known to exist from previous wells drilled to similar depths in the general area. Maximum anticipated bottom hole pressure equals approximately 6,700 psi. Maximum anticipated bottom hole temperature is 215° F.

9. Surface is owned by the Ute Indian tribe.

5M BOP STACK

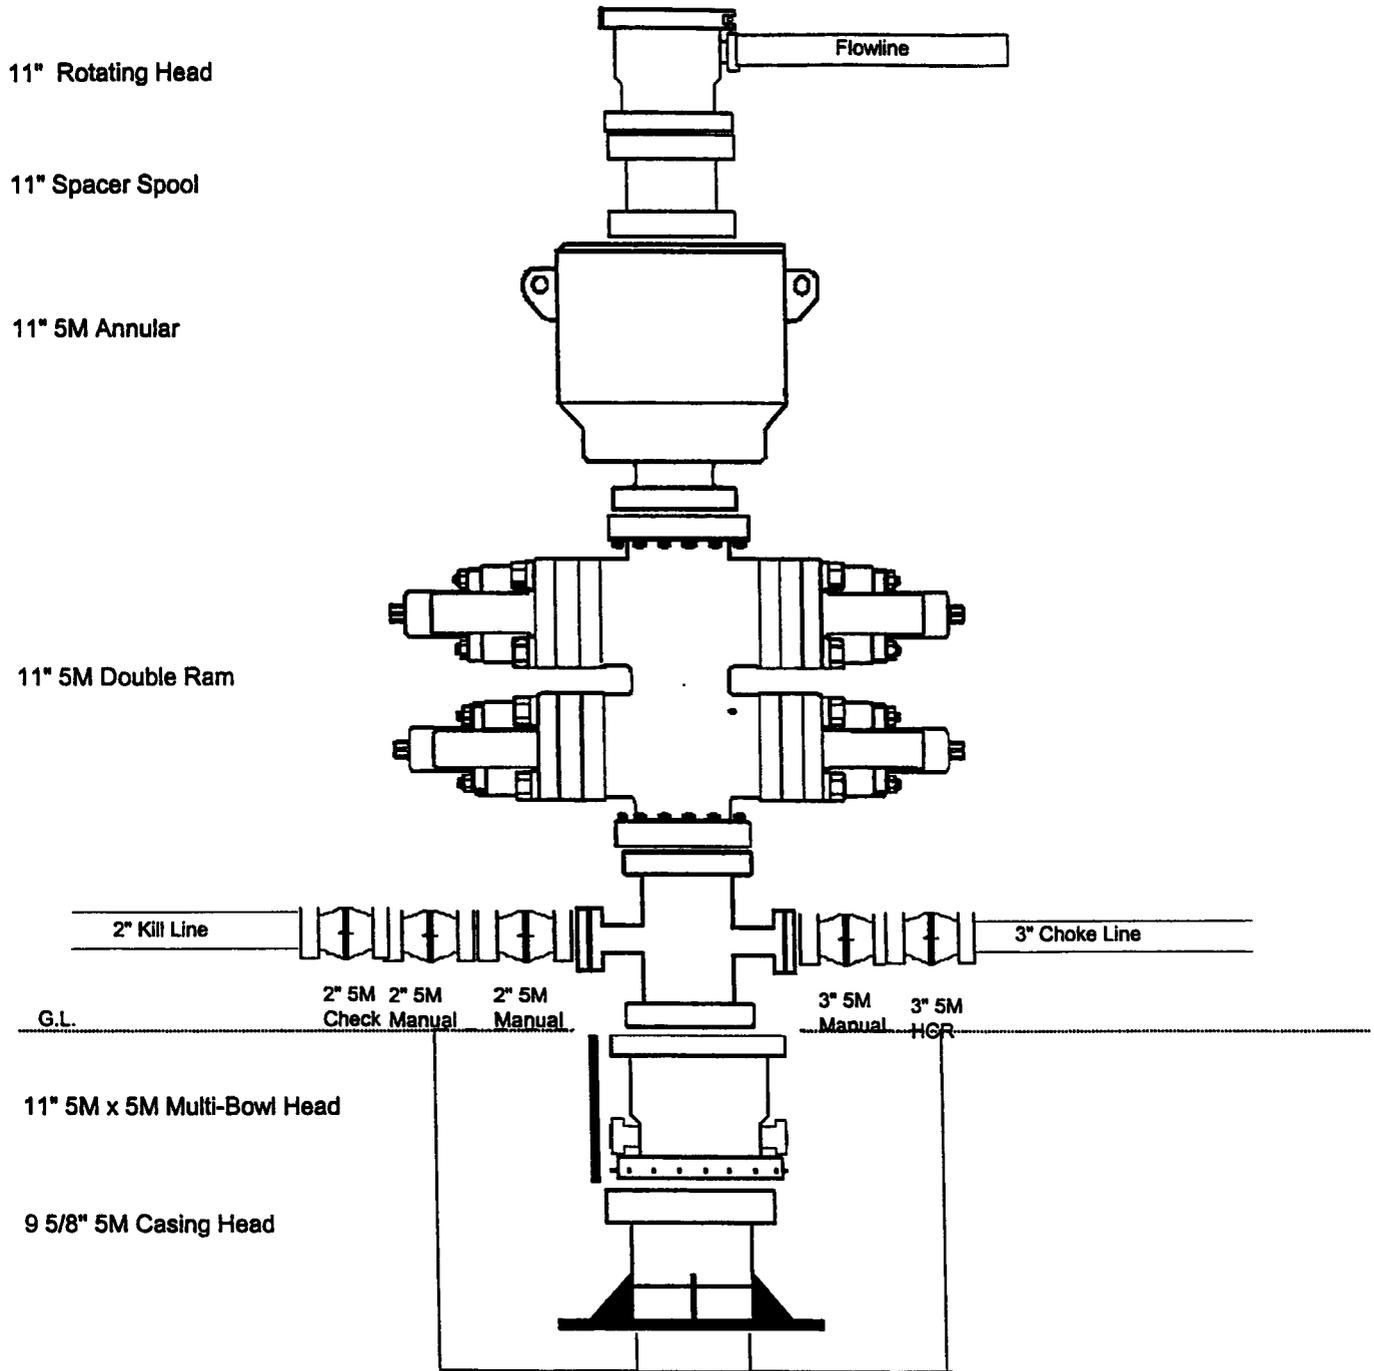

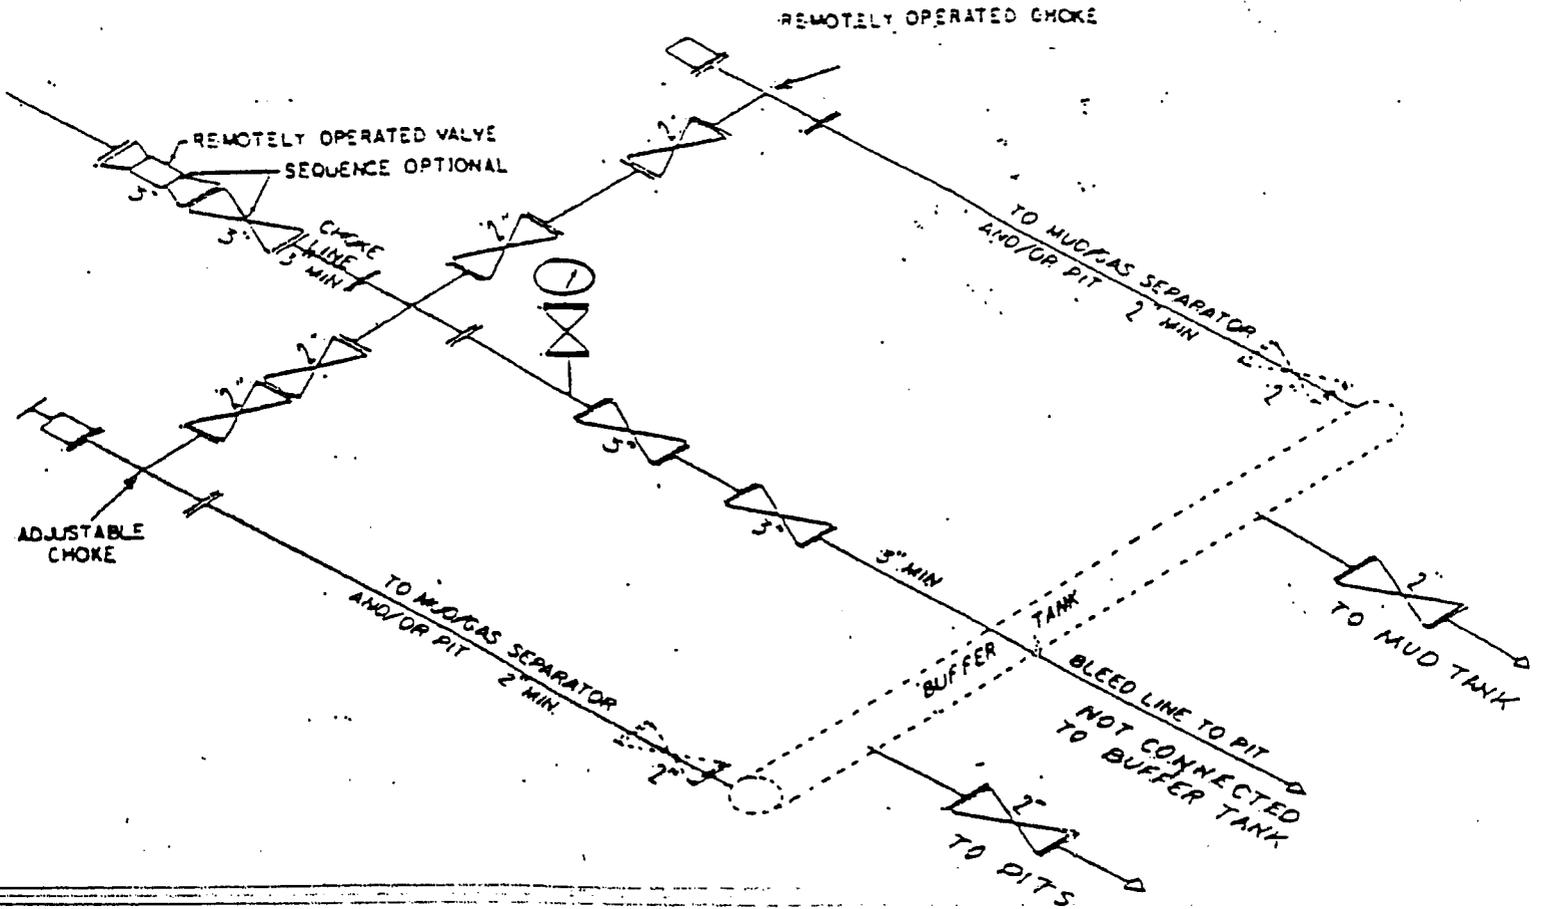

② 5M CHOKE MANIFOLD EQUIPMENT — CONFIGURATION OF CHOKES MAY VARY

**QEP UINTA BASIN, INC.
WV 16DML-13-8-21
419' FSL 265' FEL
SESE, SECTION 13, T8S, R21E
UINTAH COUNTY, UTAH
LEASE # UTU-0806**

ONSHORE ORDER NO. 1

MULTI – POINT SURFACE USE & OPERATIONS PLAN

1. Existing Roads:

The proposed well site is approximately 10 miles east of Ouray, Utah.

Refer to Topo Maps A and B for location of access roads within a 2 – mile radius.

There will be no improvements made to existing roads.

2. Planned Access Roads:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

Refer to Topo Map B for the location of the proposed access road.

3. Location of Existing Wells Within a 1 – Mile Radius:

Please refer to Topo Map C.

4. Location of Existing & Proposed Facilities:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

Refer to Topo Map D for the location of the proposed pipeline.

5. Location and Type of Water Supply:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

6. Source of Construction Materials:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

7. Methods of Handling Waste Materials:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

8. Ancillary Facilities:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

9. Well Site Layout: (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

A pit liner is required. A felt pit liner will be required if bedrock is encountered.

10. Plans for Reclamation of the Surface:

Please see QEP Uinta Basin, Inc. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

Interim Reclamation

Please see attached Interim Reclamation plan.

Once the well is put onto production, QEP will reclaim as much of the well pad as possible that will allow for operations to continue in a safe and reasonable manner. Reseeding will be done in the spring or fall of every year to allow winter precipitation to aid in the success of reclamation.

Seed Mix:

Interim Reclamation:

6 lbs Hycrest Crested Wheatgrass

6 lbs Needle & Threadgrass

Final Reclamation:

Seed Mix # 1 3 lbs. Fourwing Saltbush, 3 lbs. Indian Rice Grass, 4 lbs. Hycrest Crested Wheat Grass,
1 lb. Needle & Threadgrass

11. Surface Ownership:

The well pad and access road are located on lands owned by:

Ute Tribe

PO Box 70

FT. Duchesne, UT 84026

12. Other Information

A Class III archaeological survey was conducted by Montgomery Archaeology Consultants. A copy of this report was submitted directly to the appropriate agencies by Montgomery Archaeology Consultants. Cultural resource clearance was recommended for this location.

Lessee's or Operator's Representative:

Jan Nelson
Red Wash Rep.
QEP Uinta Basin, Inc.
11002 East 17500 South
Vernal, Utah 84078
(435) 781-4331


Certification:

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil & Gas Orders, the approved plan of operations, and any applicable Notice to Lessees.

QEP Uinta Basin, Inc. will be fully responsible for the actions of their subcontractors.

A complete copy of the approved Application for Permit to Drill will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by QEP Uinta Basin, Inc. its' contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.



Jan Nelson
Red Wash Representative

14-Feb-07

Date

QUESTAR EXPLR. & PROD.

WV #16DML-13-8-21

LOCATED IN UINTAH COUNTY, UTAH
SECTION 13, T8S, R21E, S.L.B.&M.

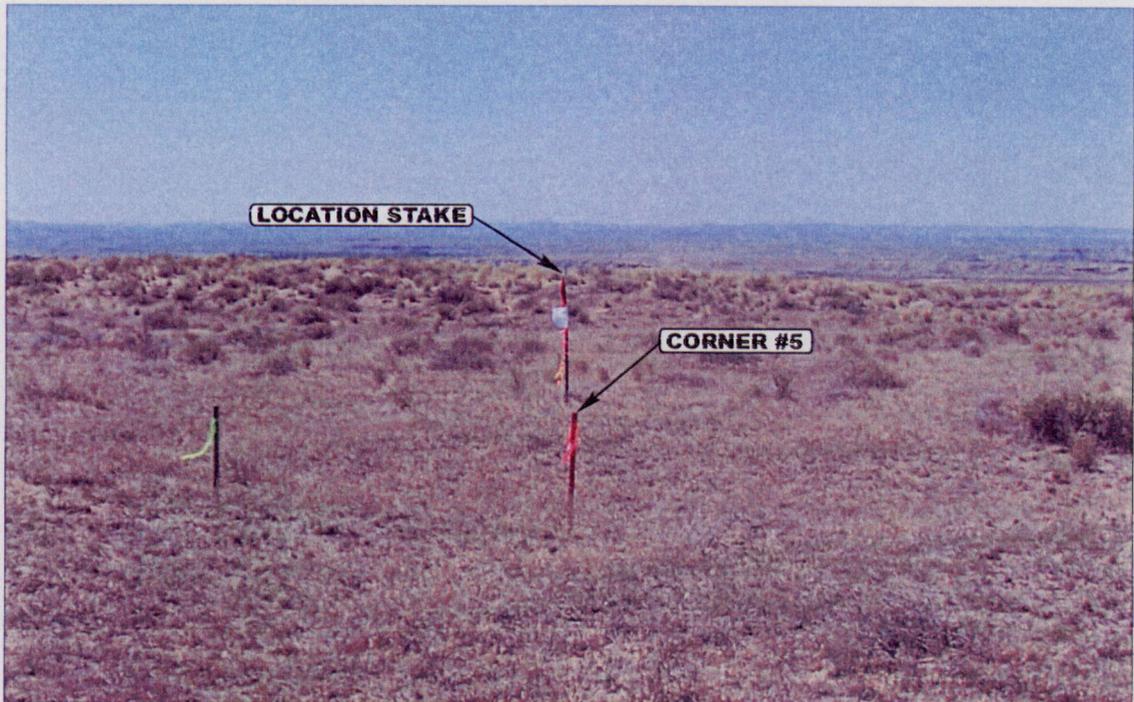


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: SOUTHERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: SOUTHEASTERLY



- Since 1964 -

Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

06 07 06
MONTH DAY YEAR

PHOTO

TAKEN BY: D.A.


DRAWN BY: L.K.

REVISED: 00-00-00

QUESTAR EXPLR. & PROD.



FIGURE #1

LOCATION LAYOUT FOR
 WV #16DML-13-8-21
 SECTION 13, T8S, R21E, S.L.B.&M.
 419' FSL 265' FEL



SCALE: 1" = 50'
 DATE: 06-01-06
 Drawn By: L.K.

NOTE:
 Flare Pit is to be located
 a min. of 100' from the
 Well Head.

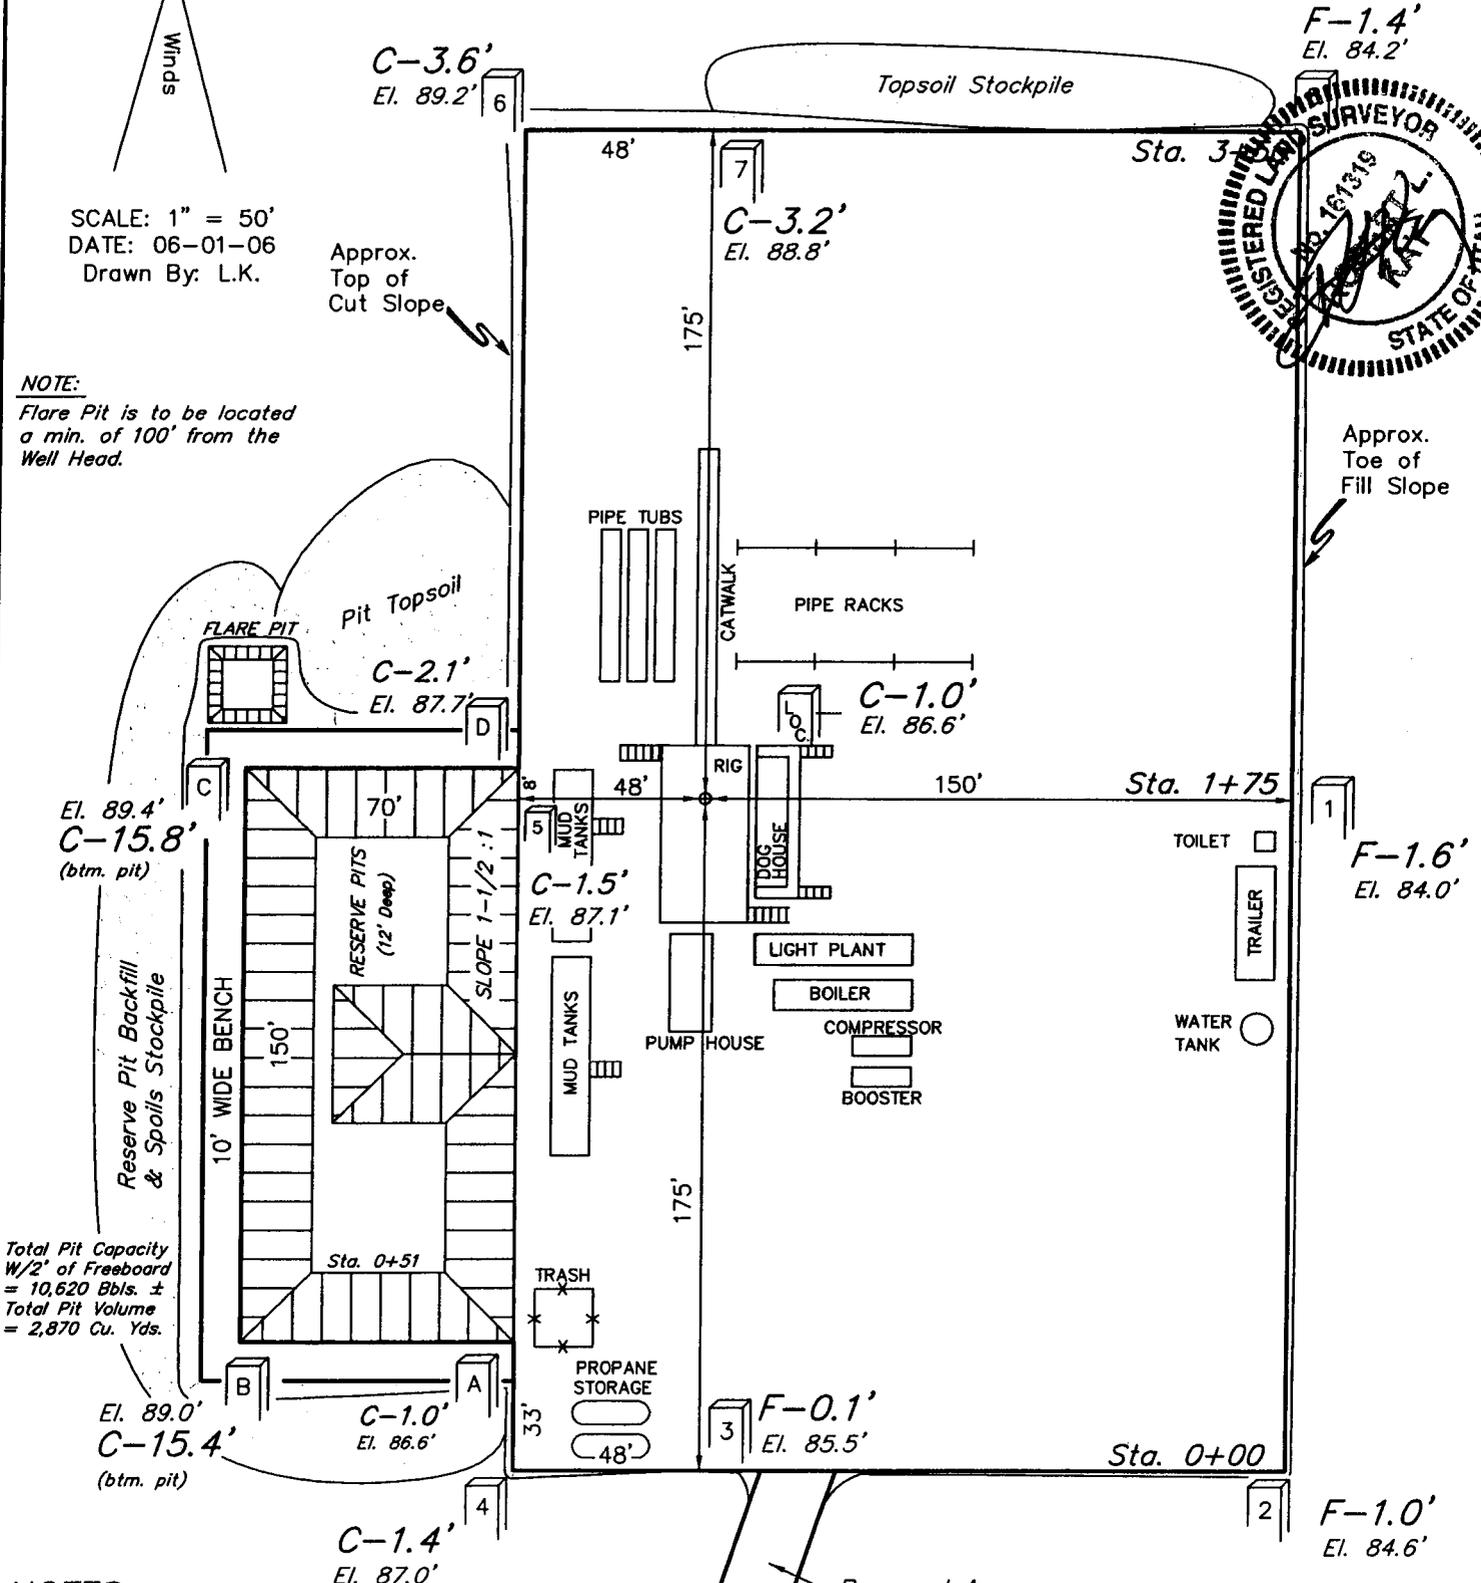

NOTES:
 Elev. Ungraded Ground At Loc. Stake = 4886.6'
 FINISHED GRADE ELEV. AT LOC. STAKE = 4885.6'

UINTAH ENGINEERING & LAND SURVEYING
 85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017






QUESTAR EXPLR. & PROD.

FIGURE #2

TYPICAL CROSS SECTIONS FOR
 WV #16DML-13-8-21
 SECTION 13, T8S, R21E, S.L.B.&M.
 419' FSL 265' FEL

X-Section Scale
 1" = 20'
 1" = 50'

DATE: 06-01-06
 Drawn By: L.K.

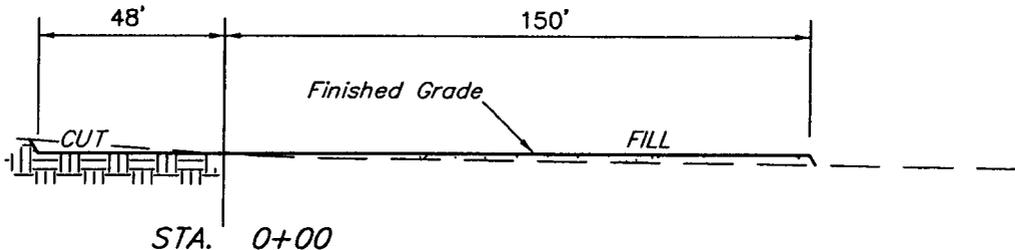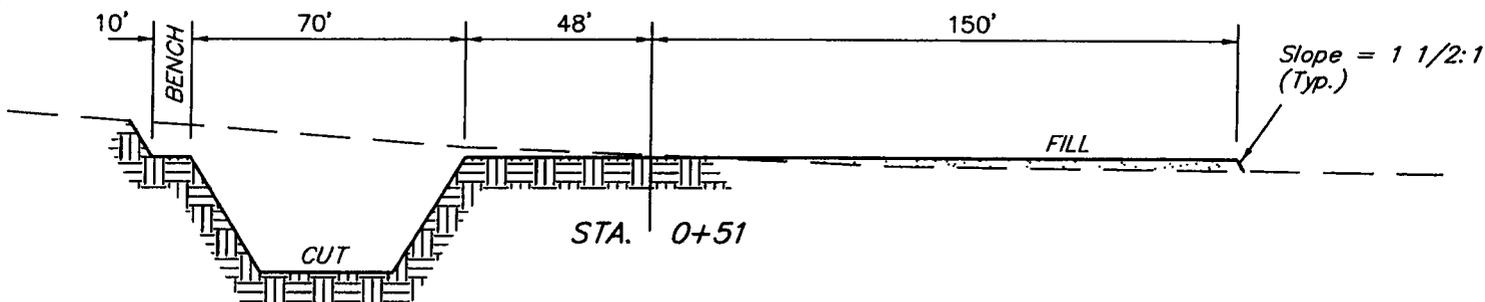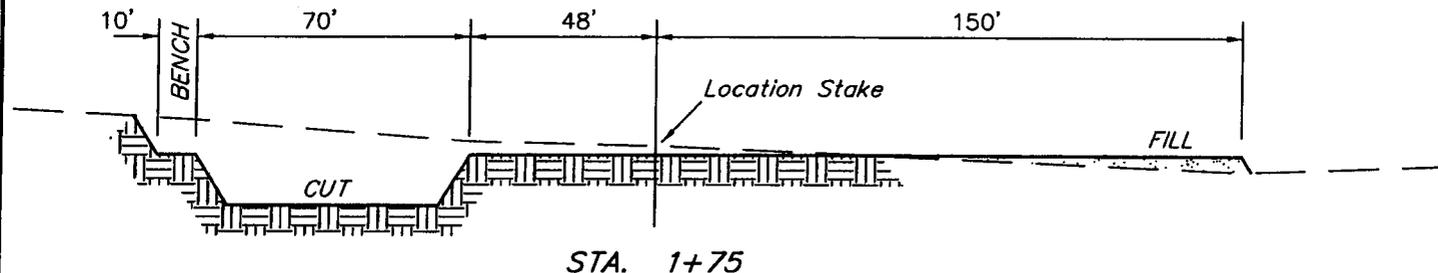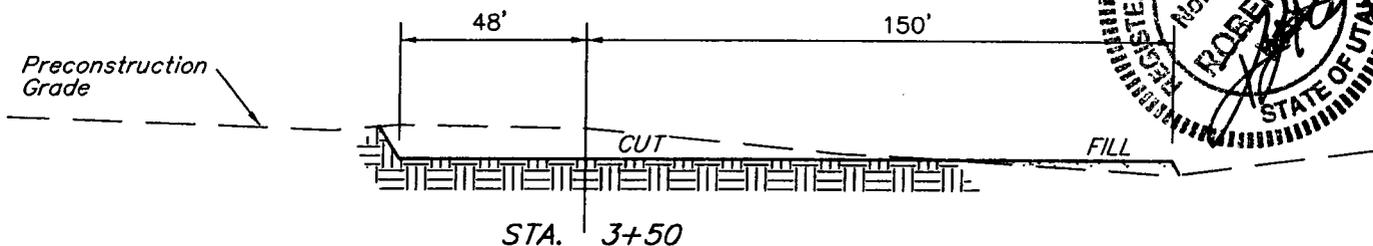

NOTE:

Topsoil should not be Stripped Below Finished Grade on Substructure Area.

APPROXIMATE YARDAGES

CUT	
(12") Topsoil Stripping	= 3,290 Cu. Yds.
Remaining Location	= 4,240 Cu. Yds.
TOTAL CUT	= 7,530 CU.YDS.
FILL	= 2,800 CU.YDS.

* NOTE:

FILL QUANTITY INCLUDES 5% FOR COMPACTION

Excess Material	= 4,730 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 4,730 Cu. Yds.
EXCESS UNBALANCE	= 0 Cu. Yds.
(After Interim Rehabilitation)	

QUESTAR EXPLR. & PROD.


INTERIM RECLAMATION PLAN FOR

WV #16DML-13-8-21
SECTION 13, T8S, R21E, S.L.B.&M.
419' FSL 265' FEL

FIGURE #3




SCALE: 1" = 50'
DATE: 06-01-06
Drawn By: L.K.

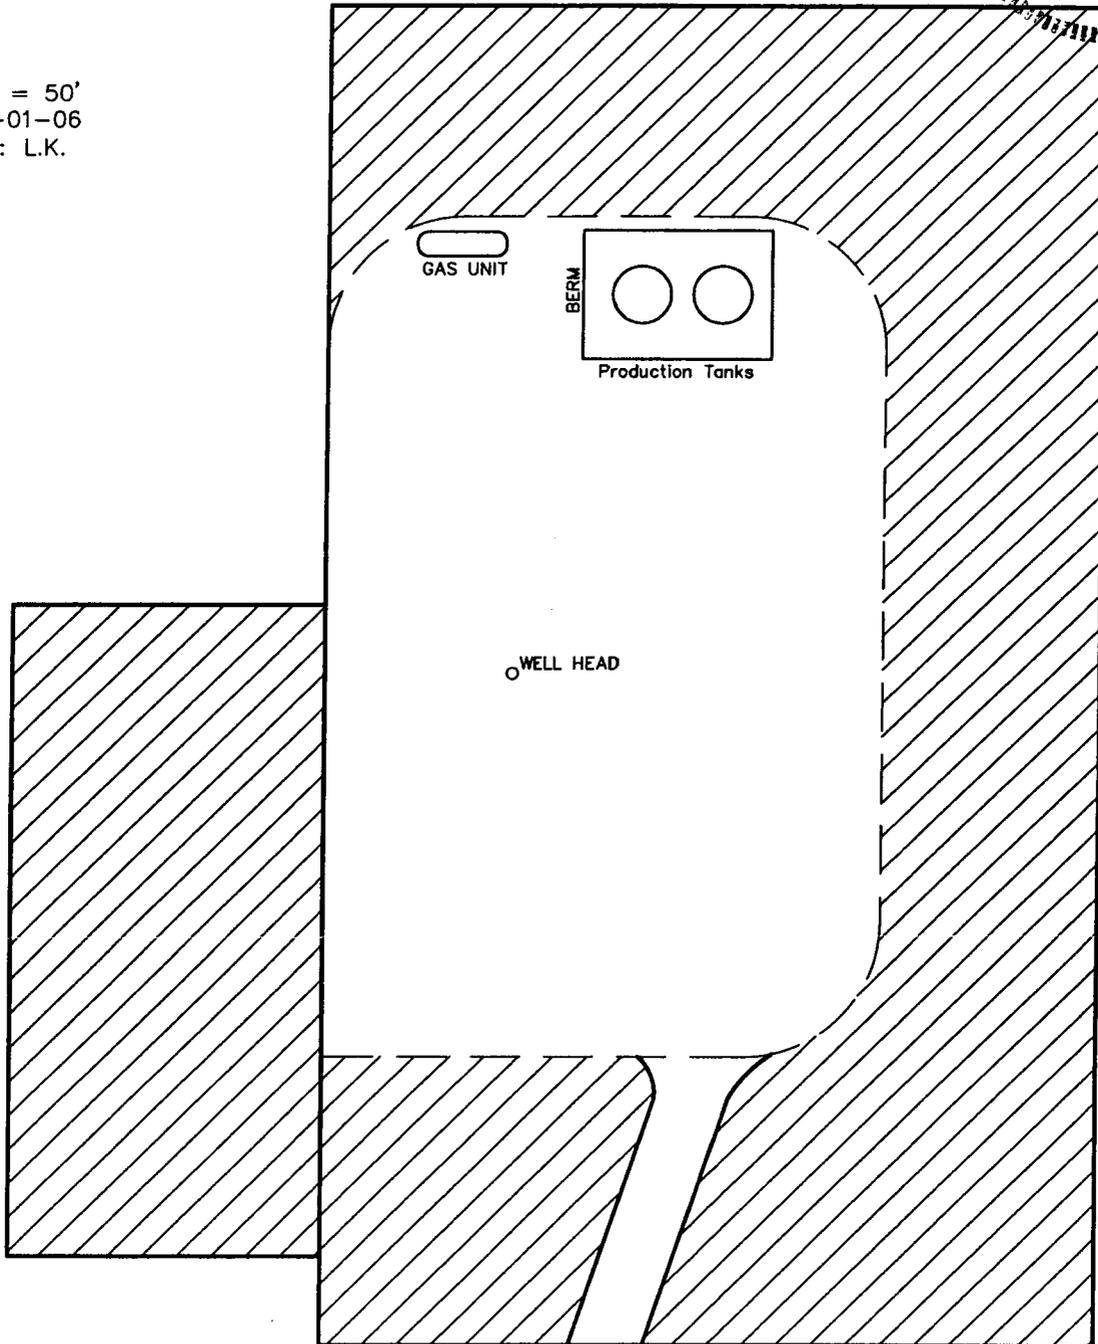

 INTERIM RECLAMATION

Access
Road

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

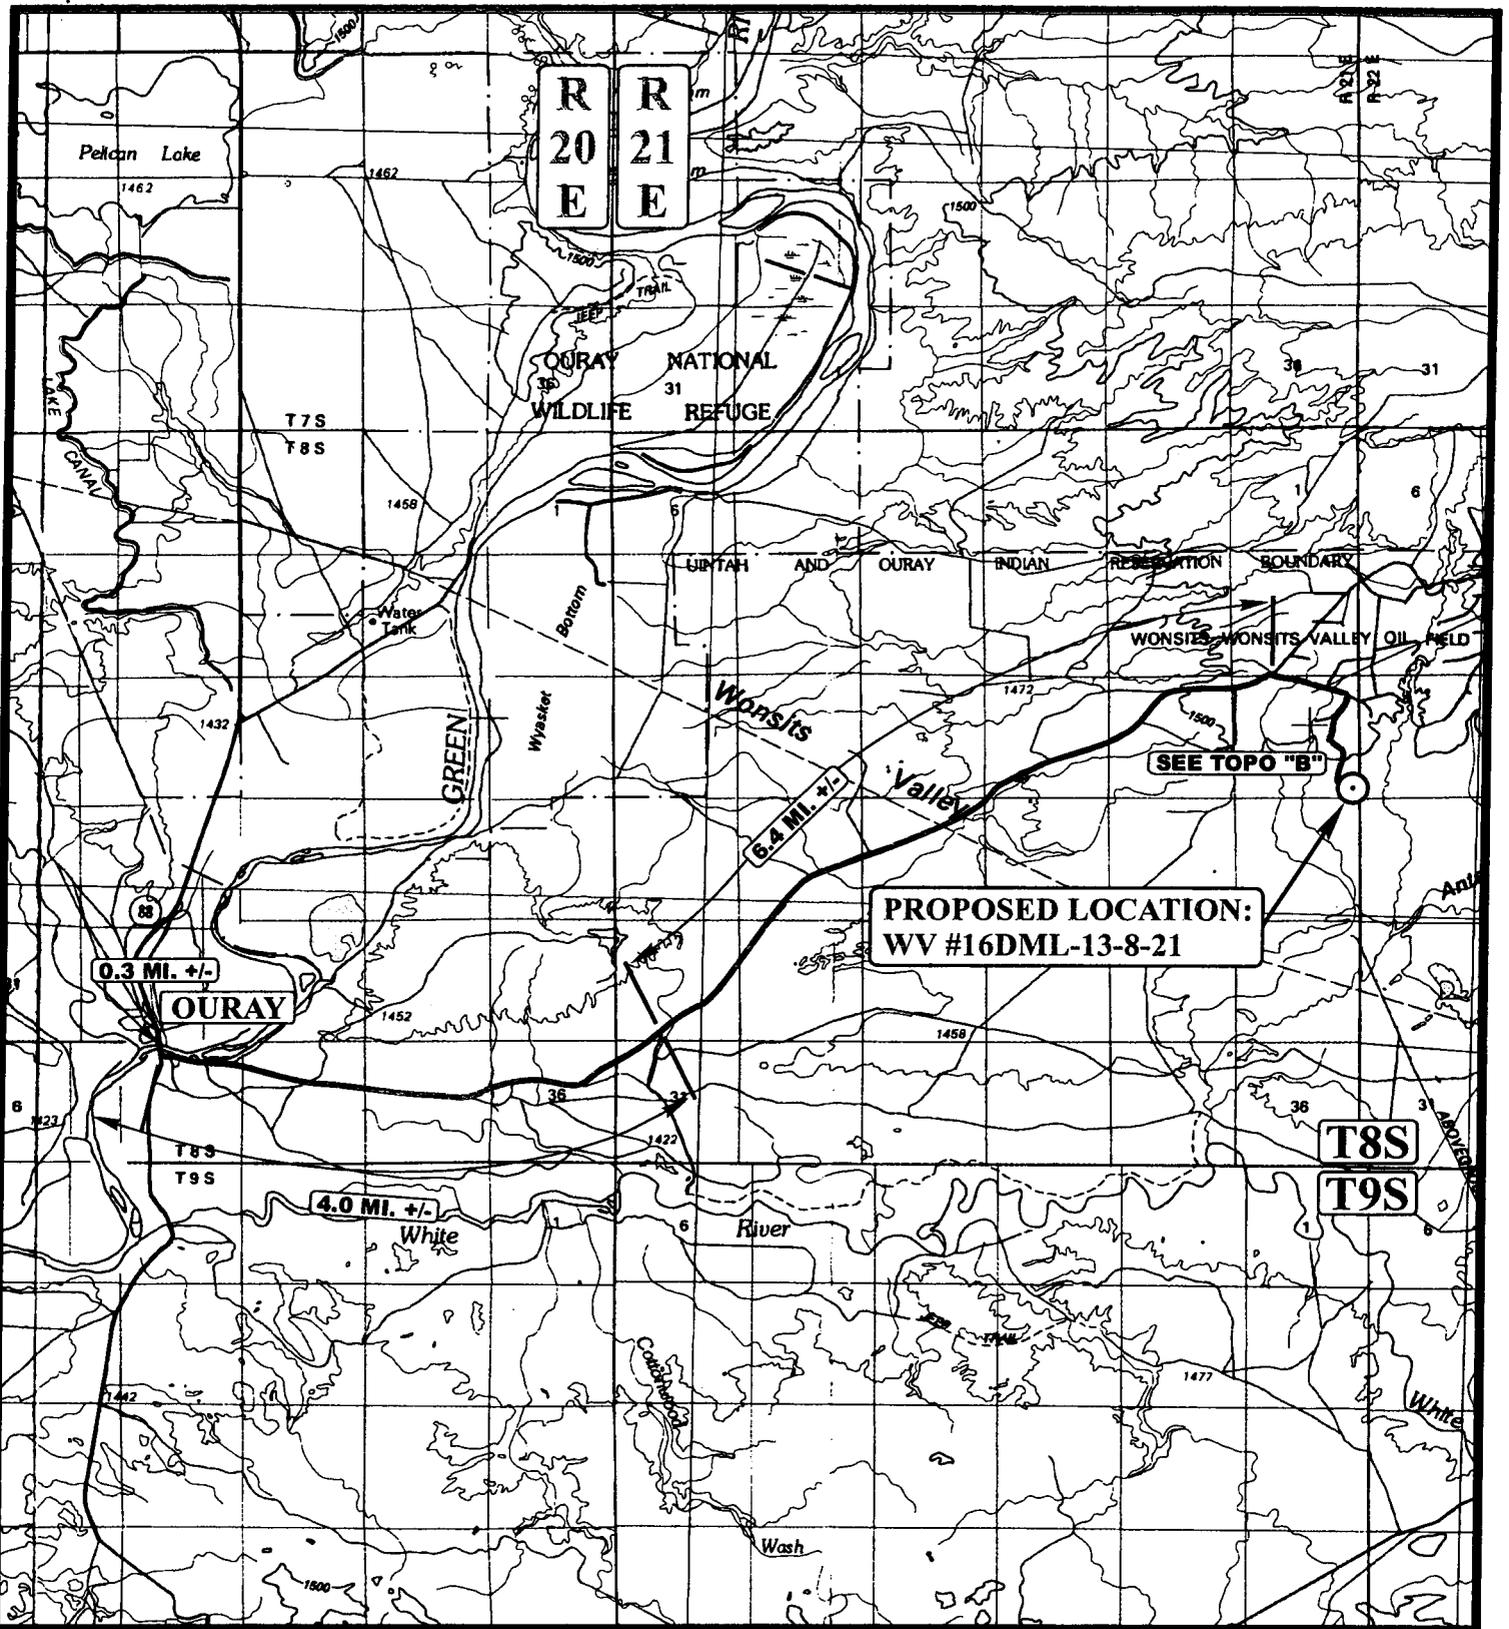

LEGEND:

○ PROPOSED LOCATION



QUESTAR EXPLR. & PROD.


WV #16DML-13-8-21
 SECTION 13, T8S, R21E, S.L.B.&M.
 419' FSL 265' FEL



Utah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP 06 07 06
 MONTH DAY YEAR
 SCALE: 1:100,000 DRAWN BY: L.K. REVISED: 00-00-00



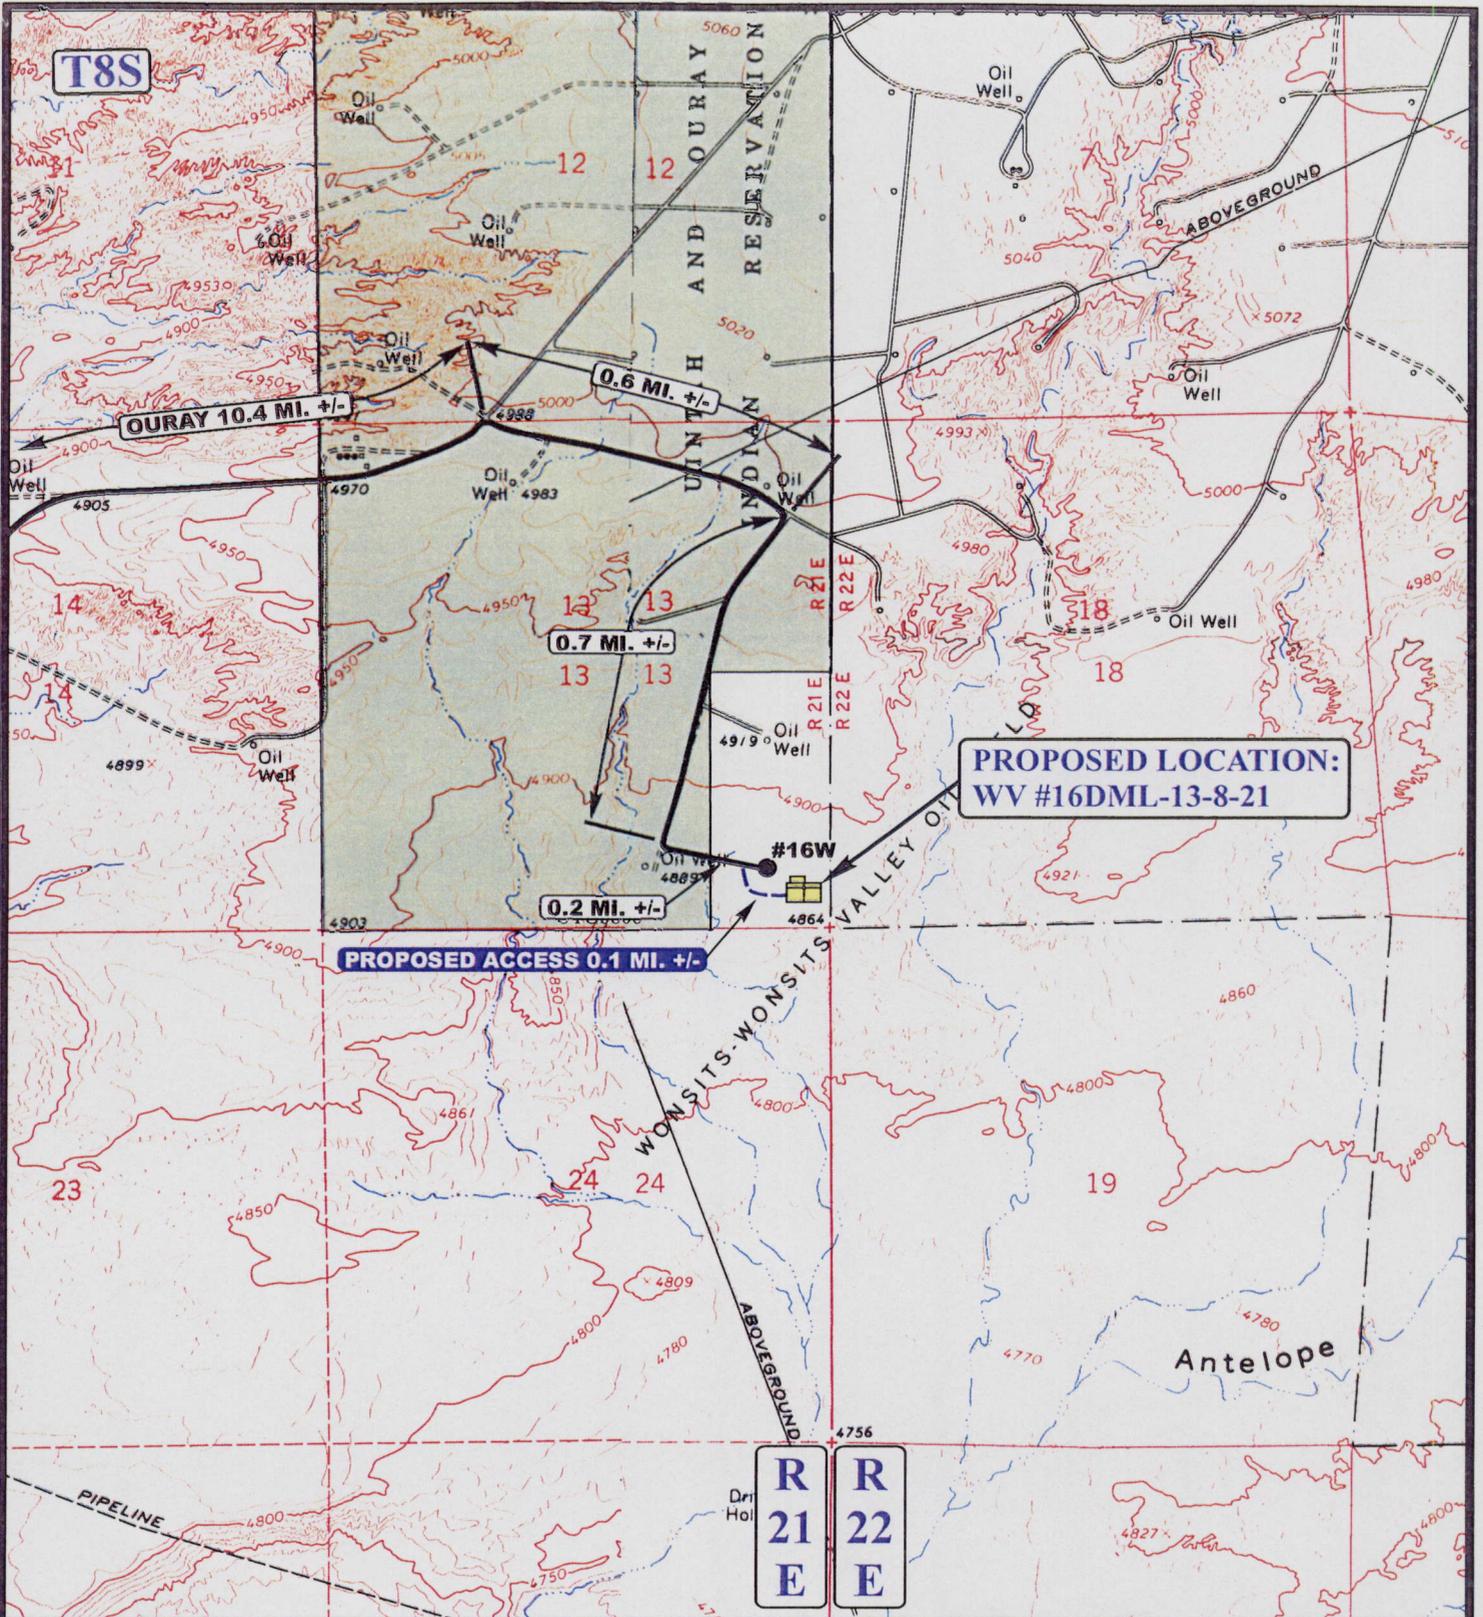

LEGEND:

- EXISTING ROAD
- - - PROPOSED ACCESS ROAD



QUESTAR EXPLR. & PROD.

WV #16DML-13-8-21
SECTION 13, T8S, R21E, S.L.B.&M.
419' FSL 265' FEL




Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP

06	07	06
MONTH	DAY	YEAR

SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 00-00-00



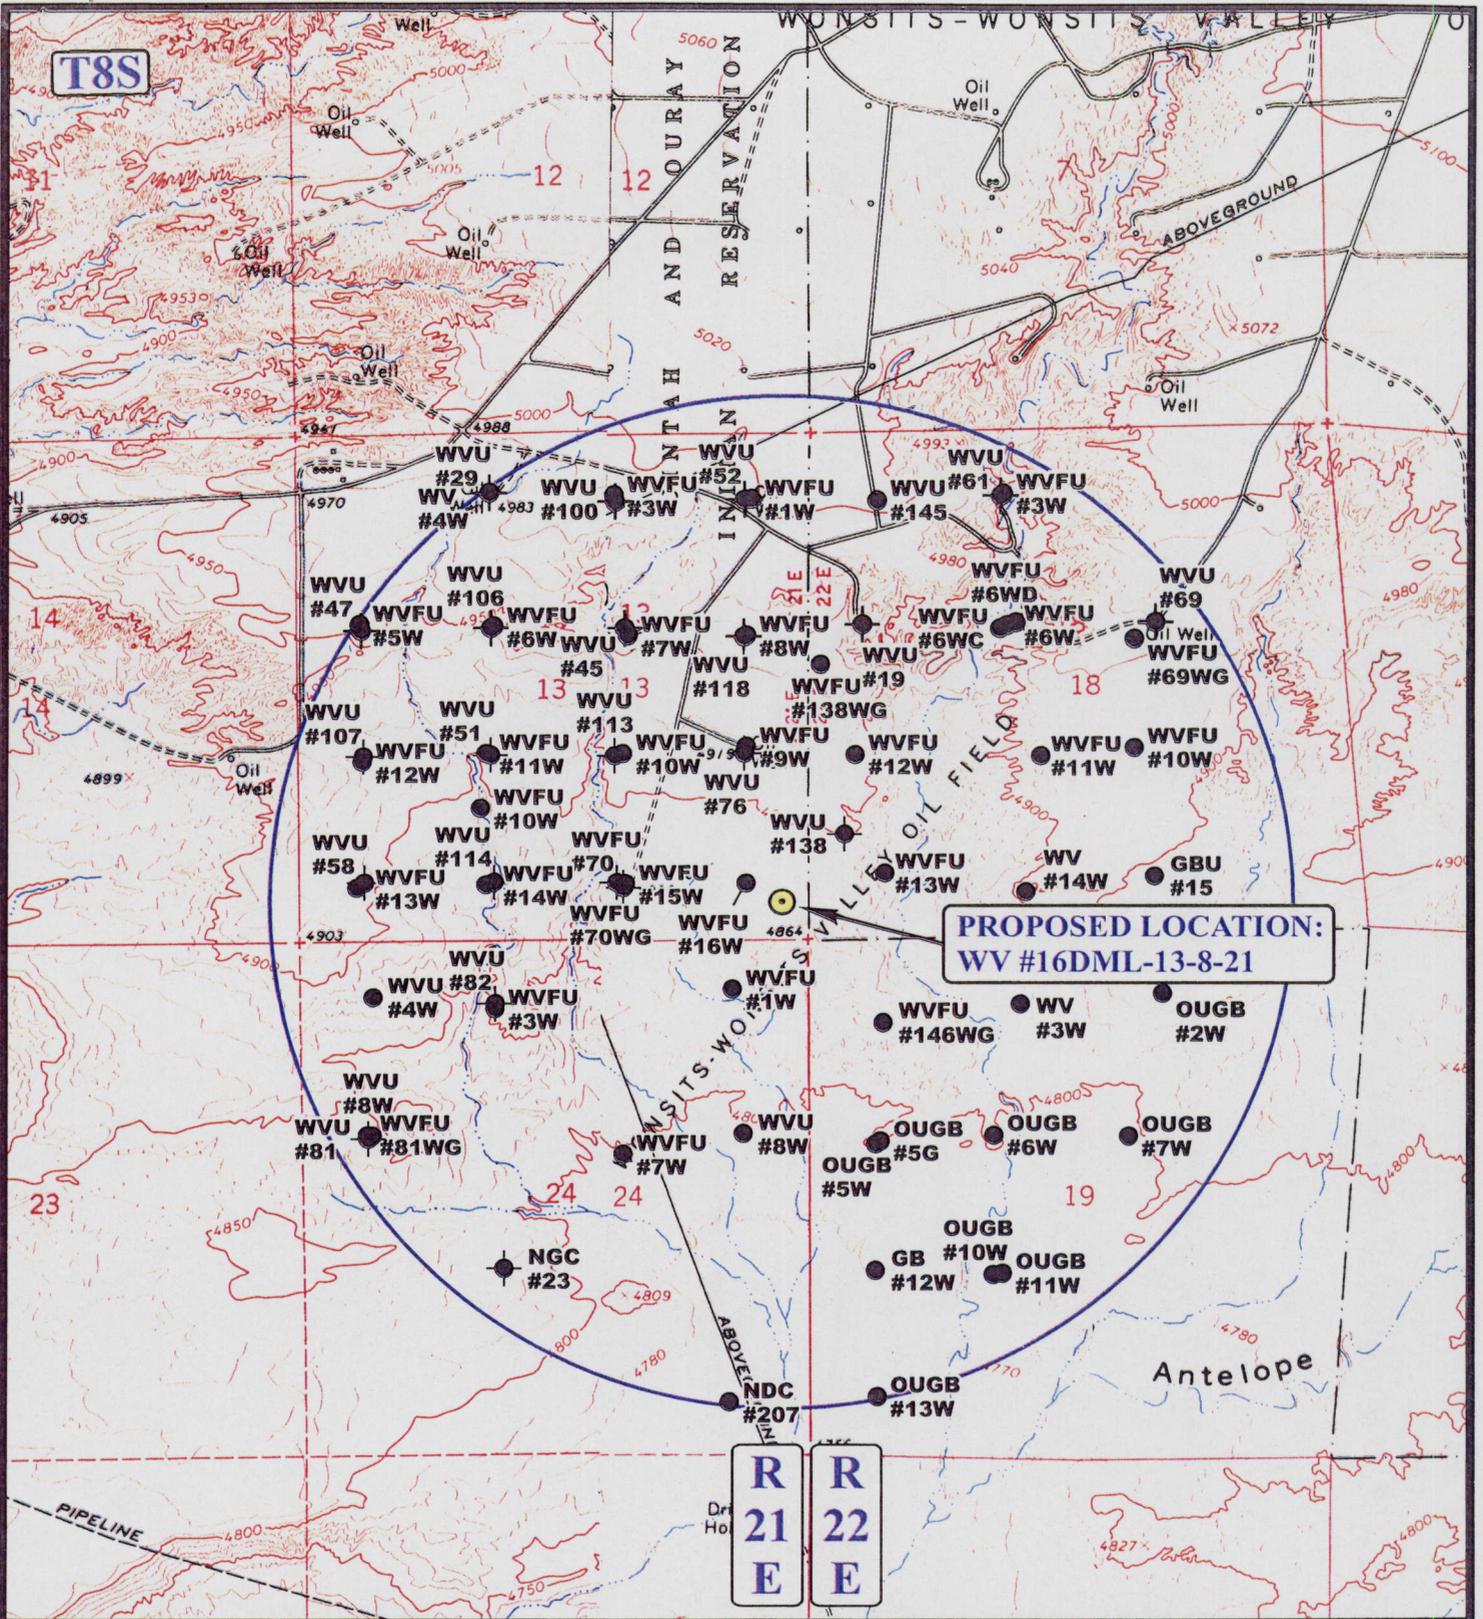

LEGEND:

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ⊗ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED

QUESTAR EXPLR. & PROD.

WV #16DML-13-8-21
SECTION 13, T8S, R21E, S.L.B.&M.
419' FSL 265' FEL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813




TOPOGRAPHIC
MAP

06 07 06
 MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 00-00-00



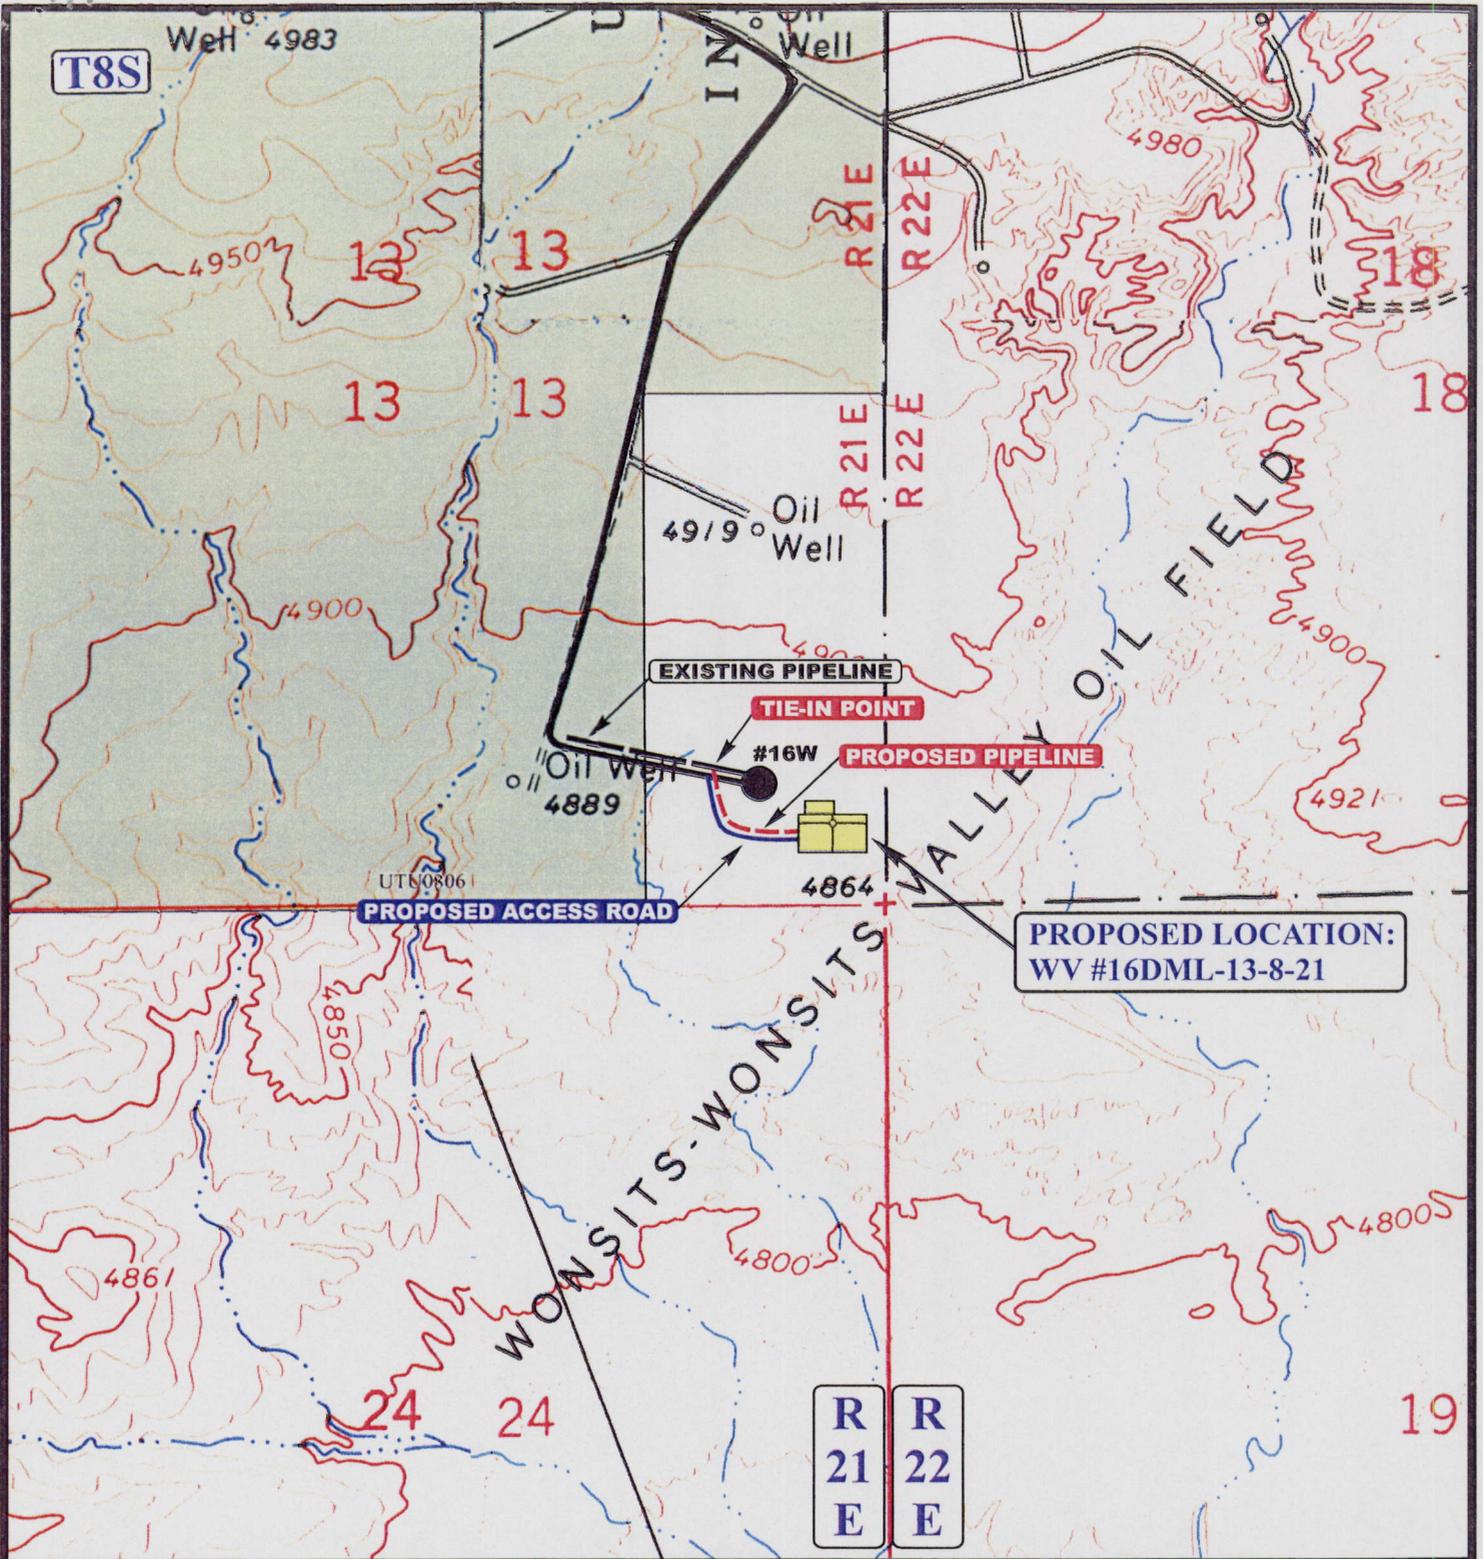

APPROXIMATE TOTAL PIPELINE DISTANCE = 710' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- PROPOSED PIPELINE
- PROPOSED PIPELINE (SERVICING OTHER WELLS)

QUESTAR EXPLR. & PROD.

WV #16DML-13-8-21
SECTION 13, T8S, R21E, S.L.B.&M.
419' FSL 265' FEL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC
MAP

06 07 06
MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: L.K. REVISED: 00-00-00



**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 10/19/2006

API NO. ASSIGNED: 43-047-38735

WELL NAME: WV 16DML-13-8-21

OPERATOR: QEP UINTA BASIN, INC. (N2460)

CONTACT: JAN NELSON

PHONE NUMBER: 435-781-4331

PROPOSED LOCATION:

SESE 13 080S 210E
 SURFACE: 0419 FSL 0265 FEL
 BOTTOM: 0419 FSL 0265 FEL
 COUNTY: UINTAH
 LATITUDE: 40.11769 LONGITUDE: -109.4933
 UTM SURF EASTINGS: 628401 NORTHINGS: 4441698
 FIELD NAME: WONSITS VALLEY (710)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering	DND	3/2/07
Geology		
Surface		

LEASE TYPE: 3 - State
 LEASE NUMBER: ML-3084
 SURFACE OWNER: 2 - Indian

PROPOSED FORMATION: MVRD
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

___ Plat
 ___ Bond: Fed[1] Ind[] Sta[] Fee[]
 (No. ESB000024)
 ___ Potash (Y/N)
 ___ Oil Shale 190-5 (B) or 190-3 or 190-13
 ___ Water Permit
 (No. 49-2153)
 ___ RDCC Review (Y/N)
 (Date: _____)
 ___ Fee Surf Agreement (Y/N)
 ___ Intent to Commingle (Y/N)

LOCATION AND SITING:

___ R649-2-3.
 Unit: WONSITS VALLEY
 ___ R649-3-2. General
 Siting: 460 From Qtr/Qtr & 920' Between Wells
 ___ R649-3-3. Exception
 ___ Drilling Unit
 Board Cause No: _____
 Eff Date: _____
 Siting: _____
 ___ R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS:

1- Cement stop at 3 (7" intermediate, surface)
2- STATEMENT OF BASIS

Application for Permit to Drill

Statement of Basis

3/21/2007

Utah Division of Oil, Gas and Mining

Page 1

APD No	API WellNo	Status	Well Type	Surf Ownr	CBM
348	43-047-38735-00-00		GW	I	No
Operator	QEP UINTA BASIN, INC.		Surface Owner-APD		
Well Name	WV 16DML-13-8-21	Unit	WONSITS VALLEY		
Field	WONSITS VALLEY		Type of Work		
Location	SESE 13 8S 21E S 0 FL 0 FL GPS Coord (UTM) 628401E 4441698N				

Geologic Statement of Basis

QEP proposes to set 450 feet of surface casing cemented to the surface and 7,800 feet of intermediate casing. The base of the moderately saline water is estimated at 1,900 feet. A search of Division of Water Rights records shows 1 water well within a 10,000 foot radius of the proposed location. The well is located approximately 1.75 miles north of the proposed location and is 40 feet deep. The use is listed as stock watering and domestic. The surface formation at this location is the Uinta Formation. The Uinta Formation is made up of discontinuous sands interbedded with shales and is not expected to produce prolific aquifers. The intermediate casing cement should be brought up above the base of the moderately saline ground water to isolate it from fresher waters uphole. The proposed casing and cement program should adequately protect usable ground water in the area.

Brad Hill
APD Evaluator

3/21/2007
Date / Time

Surface Statement of Basis

The surface rights at the proposed location are owned by the Ute Tribe. The operator is responsible for obtaining any needed permits and/or rights-of-way from the Ute Tribe.

Brad Hill
Onsite Evaluator

3/21/2007
Date / Time

Conditions of Approval / Application for Permit to Drill

Category	Condition
	None.



[Online Services](#)
[Agency List](#)
[Business](#)


Utah Division of Water Rights

WRPLAT Program Output Listing

Version: 2007.03.14.00 Rundate: 03/21/2007 03:39 PM

Radius search of 10000 feet from a point N419 W265 from the SE corner, section 13, Township 8S, Range 21E, SL b&m Criteria:wrtypes=W,C,E podtypes=U status=U,A,P usetypes=all

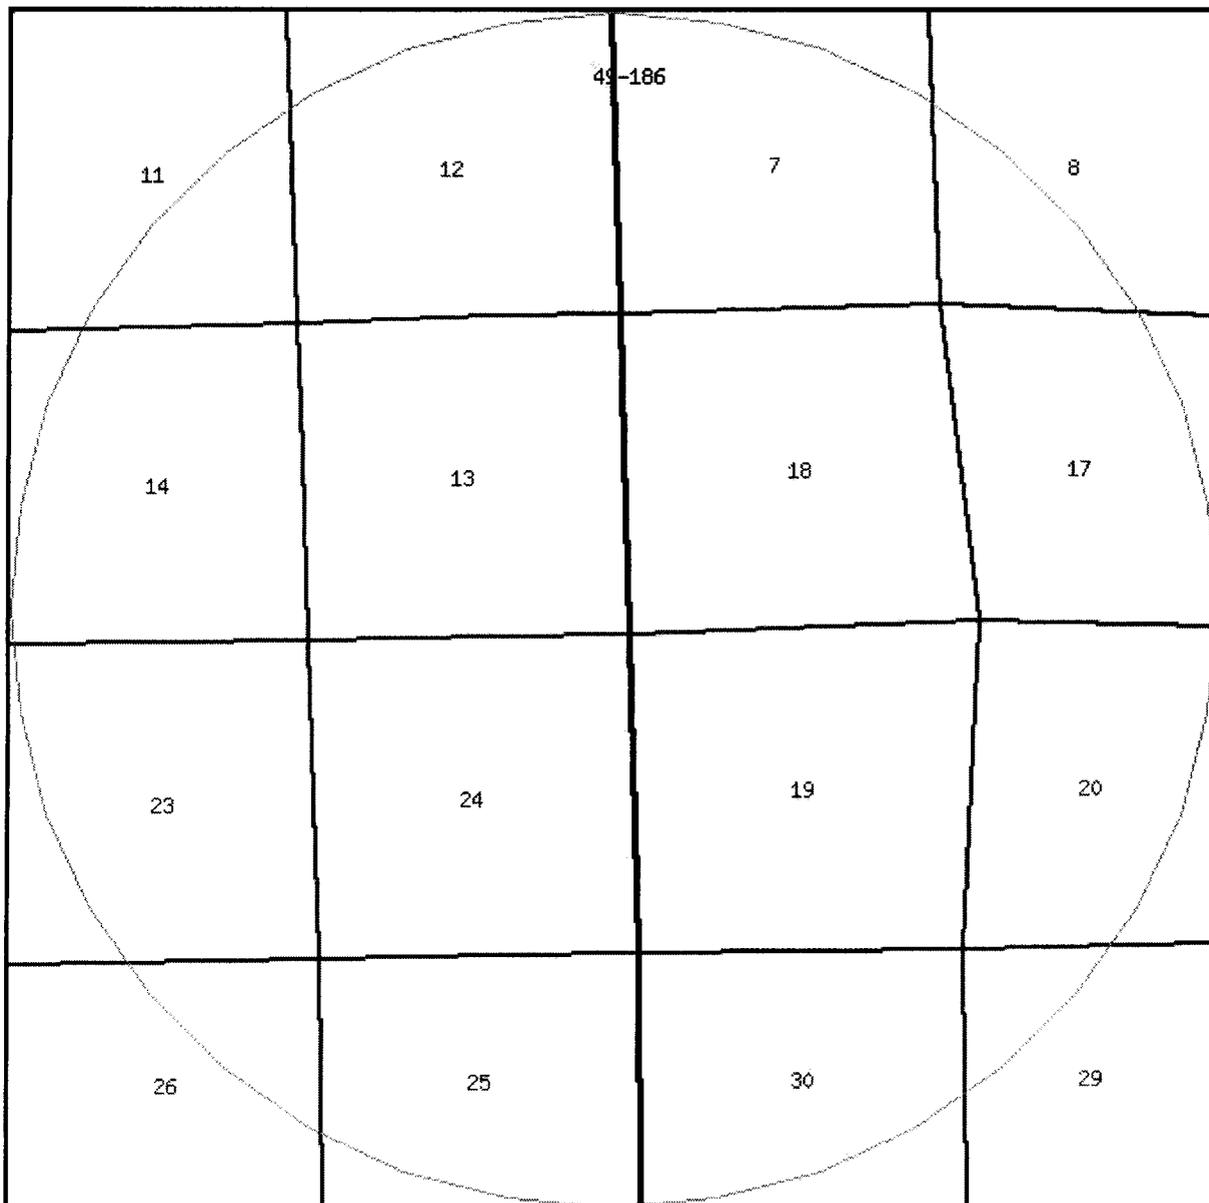


0 1300 2600 3900 5200 ft

Water Rights

WR Number	Diversion Type/Location	Well Log Status	Priority	Uses	CFS	ACFT
<u>49-186</u>	Underground S1154 W265 NE 12 8S 21E SL	P	19510910	DS	0.015	0.000

[Natural Resources](#) | [Contact](#) | [Disclaimer](#) | [Privacy Policy](#) | [Accessibility Policy](#)

Casing Schematic

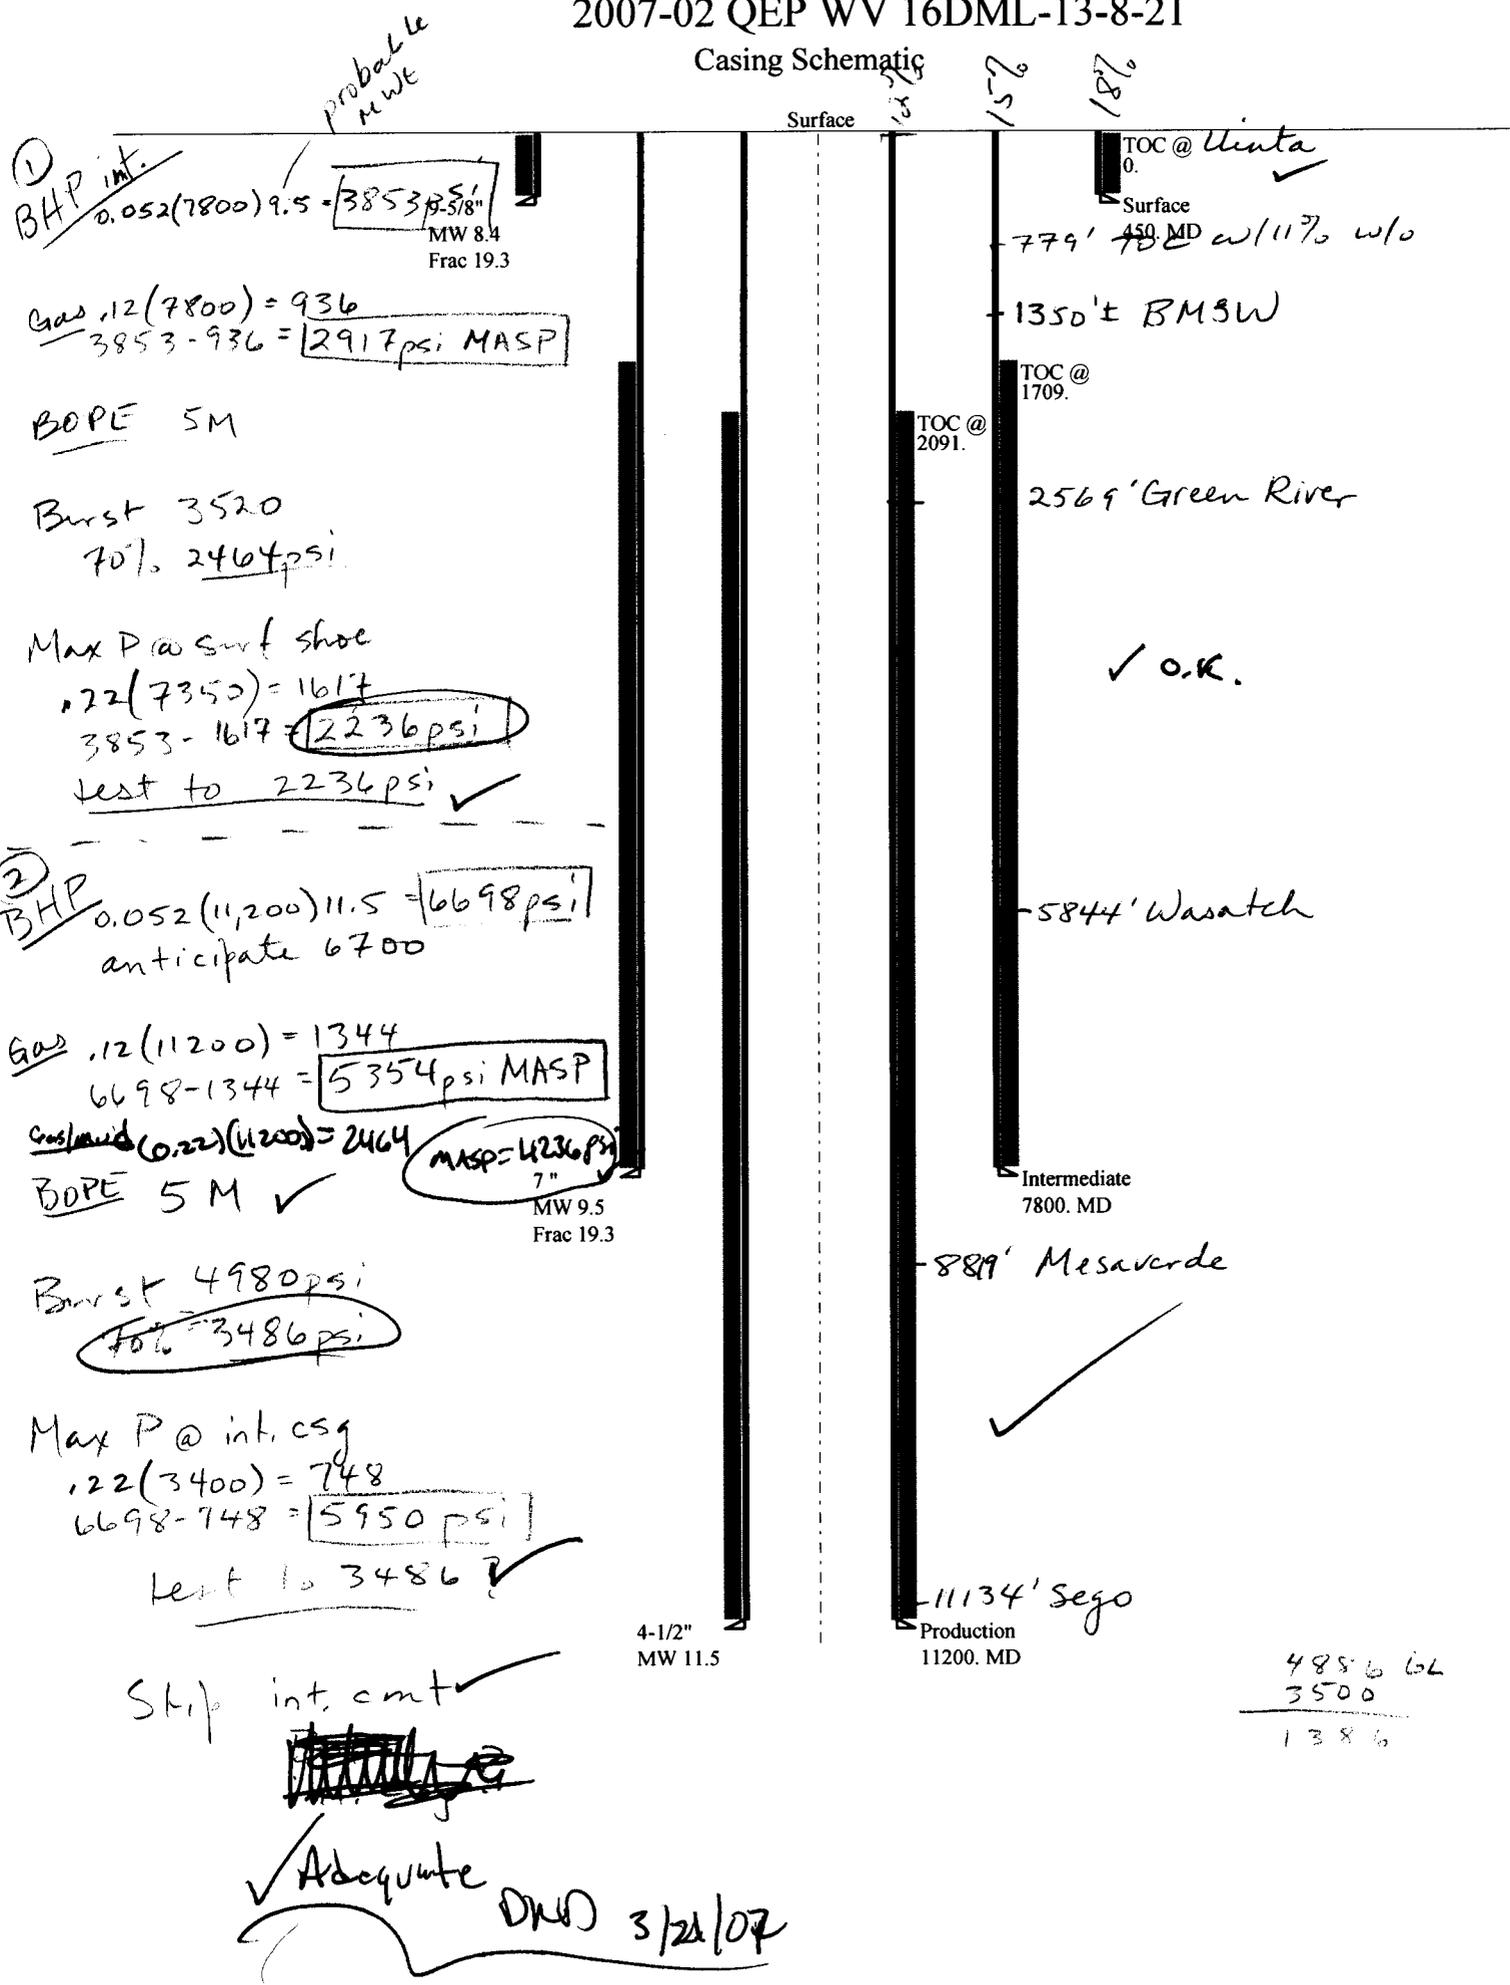

① BHP int. $0.052(7800)9.5 = 3853 \text{ psi}$
 Probable MW 8.4
 Frac 19.3

Gas $.12(7800) = 936$
 $3853 - 936 = 2917 \text{ psi MASP}$

BOPE 5M
 Burst 3520
 70% 2464 psi

Max P @ surf shoe
 $.22(7350) = 1617$
 $3853 - 1617 = 2236 \text{ psi}$
 test to 2236 psi ✓

② BHP $0.052(11,200)11.5 = 6698 \text{ psi}$
 anticipate 6700

Gas $.12(11200) = 1344$
 $6698 - 1344 = 5354 \text{ psi MASP}$

Gas/mud $(0.22)(11200) = 2464$
 BOPE 5M ✓
 MASP = 4236 psi
 7" MW 9.5
 Frac 19.3

Burst 4980 psi
 70% 3486 psi

Max P @ int. csg
 $.22(3400) = 748$
 $6698 - 748 = 5950 \text{ psi}$
 test to 3486 ✓

Skip int. cmt ✓
~~int. cmt~~

✓ Adequate
 DWD 3/21/07

TOC @ Uinta
 0.
 Surface
 779' 450 MD w/11% w/o

1350' ± BMSW

TOC @ 1709.
 TOC @ 2091.
 2569' Green River

✓ O.K.

5844' Wasatch

Intermediate
 7800. MD

889' Mesaverde

11134' Sego

Production
 11200. MD

4-1/2"
 MW 11.5

4856 GL
 3500
 1386

Well name:	2007-02 QEP WV 16DML-13-8-21	
Operator:	QEP Uinta Basin, Inc.	Project ID:
String type:	Surface	43-047-38735
Location:	Uintah County	

Design parameters:

Collapse

Mud weight: 8.400 ppg
 Design is based on evacuated pipe.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Environment:

H2S considered? No
 Surface temperature: 75 °F
 Bottom hole temperature: 81 °F
 Temperature gradient: 1.40 °F/100ft
 Minimum section length: 450 ft

Cement top: Surface

Burst

Max anticipated surface pressure: 396 psi
 Internal gradient: 0.120 psi/ft
 Calculated BHP 450 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)
 8 Round LTC: 1.80 (J)
 Buttress: 1.60 (J)
 Premium: 1.50 (J)
 Body yield: 1.50 (B)

Tension is based on buoyed weight.
 Neutral point: 394 ft

Non-directional string.

Re subsequent strings:

Next setting depth: 7,800 ft
 Next mud weight: 9,500 ppg
 Next setting BHP: 3,849 psi
 Fracture mud wt: 19,250 ppg
 Fracture depth: 450 ft
 Injection pressure: 450 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	450	9.625	36.00	J-55	ST&C	450	450	8.796	195.3
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	196	2020	10.287	450	3520	7.82	14	394	27.77 J

Prepared by: Helen Sadik-Macdonald
 Div of Oil, Gas & Minerals

Phone: 801-538-5357
 FAX: 801-359-3940

Date: February 21, 2007
 Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 450 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:	2007-02 QEP WV 16DML-13-8-21	
Operator:	QEP Uinta Basin, Inc.	Project ID:
String type:	Production	43-047-38735
Location:	Uintah County	

Design parameters:	Minimum design factors:	Environment:
<u>Collapse</u>	<u>Collapse:</u>	H2S considered? No
Mud weight: 11.500 ppg	Design factor 1.125	Surface temperature: 75 °F
Design is based on evacuated pipe.		Bottom hole temperature: 232 °F
		Temperature gradient: 1.40 °F/100ft
		Minimum section length: 1,500 ft
	<u>Burst:</u>	Cement top: 2,091 ft
	Design factor 1.00	
<u>Burst</u>		
Max anticipated surface pressure: 4,227 psi	<u>Tension:</u>	Non-directional string.
Internal gradient: 0.220 psi/ft	8 Round STC: 1.80 (J)	
Calculated BHP 6,691 psi	8 Round LTC: 1.80 (J)	
No backup mud specified.	Buttress: 1.60 (J)	
	Premium: 1.50 (J)	
	Body yield: 1.50 (B)	
	Tension is based on buoyed weight.	
	Neutral point: 9,275 ft	

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	11200	4.5	11.60	P-110	LT&C	11200	11200	3.875	977.4
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	6691	7580	1.133	6691	10690	1.60	108	279	2.59 J

Prepared by: Helen Sadik-Macdonald
Div of Oil, Gas & Minerals

Phone: 801-538-5357
FAX: 801-359-3940

Date: February 21, 2007
Salt Lake City, Utah

Remarks:
Collapse is based on a vertical depth of 11200 ft, a mud weight of 11.5 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

March 21, 2007

*Amended

QEP Uinta Basin, Inc
1571 E 1700 S
Vernal, UT 84078

Re: Wonsits Valley 16DML-13-8-21 Well, 419' FSL, 265' FEL, SE SE, Sec. 13,
T. 8 South, R. 21 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-38735.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor (via e-mail)
Bureau of Land Management, Vernal District Office
SITLA

Operator: QEP Uinta Basin, Inc
Well Name & Number Wonsits Valley 16DML-13-8-21
API Number: 43-047-38735
Lease: *ML-3084

Location: SE SE **Sec.** 13 **T.** 8 South **R.** 21 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

The operator is required to notify the Division of Oil, Gas and Mining of the following action during drilling of this well:

- 24 hours prior to cementing or testing casing – contact Dan Jarvis
- 24 hours prior to testing blowout prevention equipment – contact Dan Jarvis
- 24 hours prior to spudding the well – contact Carol Daniels
- Within 24 hours of any emergency changes made to the approved drilling program – contact Dustin Doucet
- Prior to commencing operations to plug and abandon the well – contact Dan Jarvis

The operator is required to get approval from the Division of Oil, Gas and Mining before performing any of the following actions during the drilling of this well:

- Plugging and abandonment or significant plug back of this well – contact Dustin Doucet
- Any changes to the approved drilling plan – contact Dustin Doucet

The following are Division of Oil, Gas and Mining contacts and their telephone numbers (please leave a voice mail message if the person is not available to take the call):

- Dan Jarvis at: (801) 538-5338 office
 (801) 942-0873 home
- Carol Daniels at: (801) 538-5284 office
- Dustin Doucet at: (801) 538-5281 office
 (801) 733-0983 home

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. Compliance with the State of Utah Antiquities Act forbids disturbance of archeological, historical, or paleontological remains. Should archeological, historical or paleontological remains be encountered during your operations, you are required to immediately suspend all operations and immediately inform the Trust Lands Administration and the Division of State History of the discovery of such remains.
5. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)
6. Cement volume for the 7" intermediate string shall be determined from actual hole diameter in order to place cement from the pipe setting depth back to the surface.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-3084
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE TRIBE
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME: WONSITS VALLEY UNIT
2. NAME OF OPERATOR: QUESTAR EXPLORATION & PRODUCTION COMPANY		8. WELL NAME and NUMBER: WV 16DML-13-8-21
3. ADDRESS OF OPERATOR: 11002 E. 17500 S. CITY VERNAL STATE UT ZIP 84078	PHONE NUMBER: (435) 781-4301	9. API NUMBER: 4304738735
4. LOCATION OF WELL FOOTAGES AT SURFACE: 419' FSL 265' FEL		10. FIELD AND POOL, OR WILDCAT: WONSITS VALLEY
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 13 8S 21E		COUNTY: UINTAH
		STATE: UTAH


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>APD EXTENSION</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	


12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Questar Exploration & Production Co. hereby requests a 1 year extension on the WV 16DML-13-8-21.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 03-18-08
By: 

COPY SENT TO OPERATOR
Date: 3.19.2008
Initials: KS

NAME (PLEASE PRINT) <u>Laura Bills</u>	TITLE <u>Associate Regulatory Affairs Analyst</u>
SIGNATURE 	DATE <u>3/13/2008</u>

(This space for State use only)

RECONFIDENTIAL

MAR 17 2008

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-38735
Well Name: WV 16DML-13-8-21
Location: 419' FSL 265' FEL, SESE, SEC. 13, T8S, R21E
Company Permit Issued to: Questar Exploration & Production Co.
Date Original Permit Issued: 3/21/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No


Signature

3/13/2008

Date

Title: Associate Regulatory Affairs Analyst

Representing: Questar Exploration & Production Co.

RECEIVED

MAR 17 2008

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-3084
2. NAME OF OPERATOR: QUESTAR EXPLORATION & PRODUCTION COMPANY		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE TRIBE
3. ADDRESS OF OPERATOR: 11002 E. 17500 S. CITY VERNAL STATE UT ZIP 84078		7. UNIT or CA AGREEMENT NAME: WONSITS VALLEY UNIT
4. LOCATION OF WELL FOOTAGES AT SURFACE: 419' FSL 265' FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 13 8S 21E		8. WELL NAME and NUMBER: WV 16DML-13-8-21
PHONE NUMBER: (435) 781-4301		9. API NUMBER: 4304738735
		10. FIELD AND POOL, OR WILDCAT: WONSITS VALLEY
		COUNTY: UINTAH
		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>APD EXTENSION</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Questar Exploration & Production Co. hereby requests a 1 year extension on the WV 16DML-13-8-21.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 03-16-09
By: [Signature]

COPY SENT TO OPERATOR

Date: 3.18.2009

Initials: KS

NAME (PLEASE PRINT) <u>Laura Bills</u>	TITLE <u>Associate Regulatory Affairs Analyst</u>
SIGNATURE <u>[Signature]</u>	DATE <u>3/10/2009</u>

(This space for State use only)

RECEIVED

MAR 11 2009

CONFIDENTIAL

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-38735
Well Name: WV 16DML-13-8-21
Location: 419' FSL 265' FEL, SESE, SEC. 13, T8S, R21E
Company Permit Issued to: Questar Exploration & Production Co.
Date Original Permit Issued: 3/21/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No


Signature

3/10/2009
Date

Title: Associate Regulatory Affairs Analyst

Representing: Questar Exploration & Production Co.

RECEIVED
MAR 11 2009
DIV. OF OIL, GAS & MINING



State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

March 9, 2010

Jan Nelson
Questar Exploration & Production Co.
11002 East 17500 South
Vernal, UT 84078


Dear Ms. Nelson:

Re: APD Rescinded – WV 16DML-13-8-21, Sec. 13, T.8S, R. 21E
Uintah County, Utah API No. 43-047-38735

The Application for Permit to Drill (APD) for the subject well was approved by the Division of Oil, Gas and Mining (Division) on March 21, 2007. On March 18, 2008 and March 11, 2009 the Division granted a one-year APD extension. On March 4, 2010, you requested that the division rescind the state approved APD. No drilling activity at this location has been reported to the division. Therefore, approval to drill the well is hereby rescinded, effective March 4, 2010.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

dm
Enclosure
cc: SITLA, Ed Bonner



Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET (for state use only)

ROUTING
 CDW

Change of Operator (Well Sold)

X - Operator Name Change

The operator of the well(s) listed below has changed, effective:

6/14/2010

FROM: (Old Operator): N5085-Questar Exploration and Production Company 1050 17th St, Suite 500 Denver, CO 80265 Phone: 1 (303) 308-3048	TO: (New Operator): N3700-QEP Energy Company 1050 17th St, Suite 500 Denver, CO 80265 Phone: 1 (303) 308-3048
--	--

WELL NAME		CA No.	Unit:		WONSITS VALLEY				
		SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
SEE ATTACHED									

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 6/28/2010
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 6/28/2010
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 6/24/2010
- Is the new operator registered in the State of Utah: Business Number: 764611-0143
- (R649-9-2) Waste Management Plan has been received on: Requested
- Inspections of LA PA state/fee well sites complete on: n/a
- Reports current for Production/Disposition & Sundries on: ok
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 8/16/2010 BIA not yet
- Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: 8/16/2010
- Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: N/A
- Underground Injection Control ("UIC")** Division has approved UIC Form 5 Transfer of Authority to **Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: 6/29/2010

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 6/30/2010
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 6/30/2010
- Bond information entered in RBDMS on: 6/30/2010
- Fee/State wells attached to bond in RBDMS on: 6/30/2010
- Injection Projects to new operator in RBDMS on: 6/30/2010
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: ESB000024
- Indian well(s) covered by Bond Number: 965010693
- (R649-3-1) The **NEW** operator of any state/fee well(s) listed covered by Bond Number 965010695
- The **FORMER** operator has requested a release of liability from their bond on: n/a

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **NEW** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: n/a

COMMENTS:

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

5. LEASE DESIGNATION AND SERIAL NUMBER:
See attached

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
See attached

7. UNIT or CA AGREEMENT NAME:
See attached

8. WELL NAME and NUMBER:
See attached

9. API NUMBER:
Attached

10. FIELD AND POOL, OR WILDCAT:
See attached

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL: OIL WELL GAS WELL OTHER _____

2. NAME OF OPERATOR:
Questar Exploration and Production Company *N5085*

3. ADDRESS OF OPERATOR:
1050 17th Street, Suite 500 *City* Denver STATE *CO* ZIP *80265* PHONE NUMBER: *(303) 672-6900*

4. LOCATION OF WELL:
FOOTAGES AT SURFACE: *See attached* COUNTY: *Attached*
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: STATE: *UTAH*

11 CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: <u>6/14/2010</u>	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Operator Name Change</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12 DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Effective June 14, 2010 Questar Exploration and Production Company changed its name to QEP Energy Company. This name change involves only an internal corporate name change and no third party change of operator is involved. The same employees will continue to be responsible for operations of the properties described on the attached list. All operations will continue to be covered by bond numbers:

Federal Bond Number: 965002976 (BLM Reference No. ESB000024) *N3700*
Utah State Bond Number: ~~965003033~~
Fee Land Bond Number: ~~965003033~~ } *965010695*
BIA Bond Number: ~~799446~~ *965010693*

The attached document is an all inclusive list of the wells operated by Questar Exploration and Production Company. As of June 14, 2010 QEP Energy Company assumes all rights, duties and obligations as operator of the properties as described on the list

NAME (PLEASE PRINT) Morgan Anderson TITLE Regulatory Affairs Analyst
SIGNATURE *Morgan Anderson* DATE 6/23/2010

(This space for State use only)

RECEIVED
JUN 28 2010

DIV. OF OIL, GAS & MINING

(See Instructions on Reverse Side)

APPROVED 6/13/2010
Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

Questar Exploration Production Company (N5085) to QEP Energy Company (N3700)
WONSITS VALLEY
effective June 14, 2010

well_name	sec	twp	rng	api	entity	mineral lease	type	stat	C
WV 32	16	080S	210E	4304716513	5265	State	OW	P	
WV 74	16	080S	210E	4304720078	5265	State	OW	P	
WV 75	16	080S	210E	4304720085	5265	State	OW	P	
WV 134	16	080S	210E	4304731118	5265	State	OW	P	
WV 141	16	080S	210E	4304731609	5265	State	OW	P	
WV 127	16	080S	210E	4304731611	5265	State	OW	P	
WV 142	16	080S	210E	4304731612	5265	State	OW	P	
WV 9W-13-8-21	13	080S	210E	4304733223	14864	State	GW	PA	
WV 2W-16-8-21	16	080S	210E	4304733246	17123	State	GW	P	
WV 2G-16-8-21	16	080S	210E	4304733247	5265	State	OW	P	
WV 6W-16-8-21	16	080S	210E	4304733527	17123	State	GW	P	
WV 6G-16-8-21	16	080S	210E	4304733564	5265	State	OW	P	
WV 16W-2-8-21	02	080S	210E	4304733645	5265	State	OW	S	
WV 9W-2-8-21	02	080S	210E	4304733648	17123	State	GW	P	
WV 12W-16-8-21	16	080S	210E	4304733649	17123	State	GW	P	
WV 12G-16-8-21	16	080S	210E	4304733650	5265	State	OW	P	
WV 16W-13-8-21	13	080S	210E	4304733796	17123	State	GW	P	
WV 10G-2-8-21	02	080S	210E	4304734035	5265	State	OW	P	
WV 14G-2-8-21	02	080S	210E	4304734036	5265	State	OW	P	
WV 13G-2-8-21	02	080S	210E	4304734068	5265	State	OW	P	
WV 5G-16-8-21	16	080S	210E	4304734107	5265	State	OW	P	
WV 11W-16-8-21	16	080S	210E	4304734190	17123	State	GW	P	
WV 13W-16-8-21	16	080S	210E	4304734191	17123	State	GW	P	
WV 14W-16-8-21	16	080S	210E	4304734192	17123	State	GW	P	
WV 15W-16-8-21	16	080S	210E	4304734224	17123	State	GW	P	
WV 16W-16-8-21	16	080S	210E	4304734225	17123	State	GW	P	
WV 1MU-16-8-21	16	080S	210E	4304734288	17123	State	GW	P	
WV 3W-16-8-21	16	080S	210E	4304734290		State	GW	LA	
WV 4W-16-8-21	16	080S	210E	4304734292	12436	State	D	PA	
WV 5W-16-8-21	16	080S	210E	4304734321	17123	State	GW	P	
WV 7W-16-8-21	16	080S	210E	4304734322	17123	State	GW	P	
WV 8ML-16-8-21	16	080S	210E	4304734323	17123	State	GW	P	
WV 9W-16-8-21	16	080S	210E	4304734325	17123	State	GW	P	
WV 10W-16-8-21	16	080S	210E	4304734326	17123	State	GW	P	
WV 12BML-16-8-21	16	080S	210E	4304737824	17123	State	GW	P	
WV 12D-16-8-21	16	080S	210E	4304737870		State	GW	LA	
WV 15CML-16-8-21	16	080S	210E	4304737871	17123	State	GW	P	
WV 15DML-16-8-21	16	080S	210E	4304737872		State	GW	LA	
WV 16DML-13-8-21	13	080S	210E	4304738735		State	GW	LA	