

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED  
OMB No. 1004-0136  
Expires November 30, 2000

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. <b>UTU-01198-B</b>	
b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name	
2. Name of Operator <b>KERR MCGEE OIL &amp; GAS ONSHORE LP</b>		7. If Unit or CA Agreement, Name and No. <b>UNIT #891008900A</b>	
3A. Address <b>1368 SOUTH 1200 EAST VERNAL, UT 84078</b>		8. Lease Name and Well No. <b>NBU 1022-15N</b>	
3b. Phone No. (include area code) <b>(435) 781-7024</b>		9. API Well No. <b>43-047-38925</b>	
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface <b>SESW 673'FSL, 1900'FWL 634316 X 39.943479</b> At proposed prod. Zone <b>4422457 Y -109.427844</b>		10. Field and Pool, or Exploratory <b>NATURAL BUTTES</b>	
14. Distance in miles and direction from nearest town or post office* <b>35.6 MILES SOUTH OF VERNAL, UTAH</b>		11. Sec., T., R., M., or Blk, and Survey or Area <b>SEC. 15, T10S, R22E</b>	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) <b>673'</b>	16. No. of Acres in lease <b>2040.00</b>	17. Spacing Unit dedicated to this well <b>40.00</b>	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. <b>REFER TO TOPO C</b>	19. Proposed Depth <b>8400'</b>	20. BLM/BIA Bond No. on file <b>BOND NO. WY-2357</b>	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) <b>5225' UNGRADED GL</b>	22. Approximate date work will start*	23. Estimated duration	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- |   |   |
|---|---|
| 1. Well plat certified by a registered surveyor.  | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).   |
| 2. A Drilling Plan.   | 5. Operator certification.  |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized office. |

25. Signature 	Name (Printed/Typed) <b>SHEILA UPCHEGO</b>	Date <b>12/4/2006</b>
Title <b>SENIOR LAND ADMIN SPECIALIST</b>		
Approved by (Signature) 	Name (Printed/Typed) <b>BRADLEY G. HILL</b>	Date <b>12-14-06</b>
Title <b>ENVIRONMENTAL MANAGER</b>		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on reverse)

RECEIVED

Federal Approval of this  
Action is Necessary


DEC 11 2006

DIV. OF OIL, GAS & MINING

# T10S, R22E, S.L.B.&M.


## Kerr-McGee Oil & Gas Onshore LP

Well location, NBU #1022-15N, located as shown in the SE 1/4 SW 1/4 of Section 15, T10S, R22E, S.L.B.&M. Uintah County, Utah.

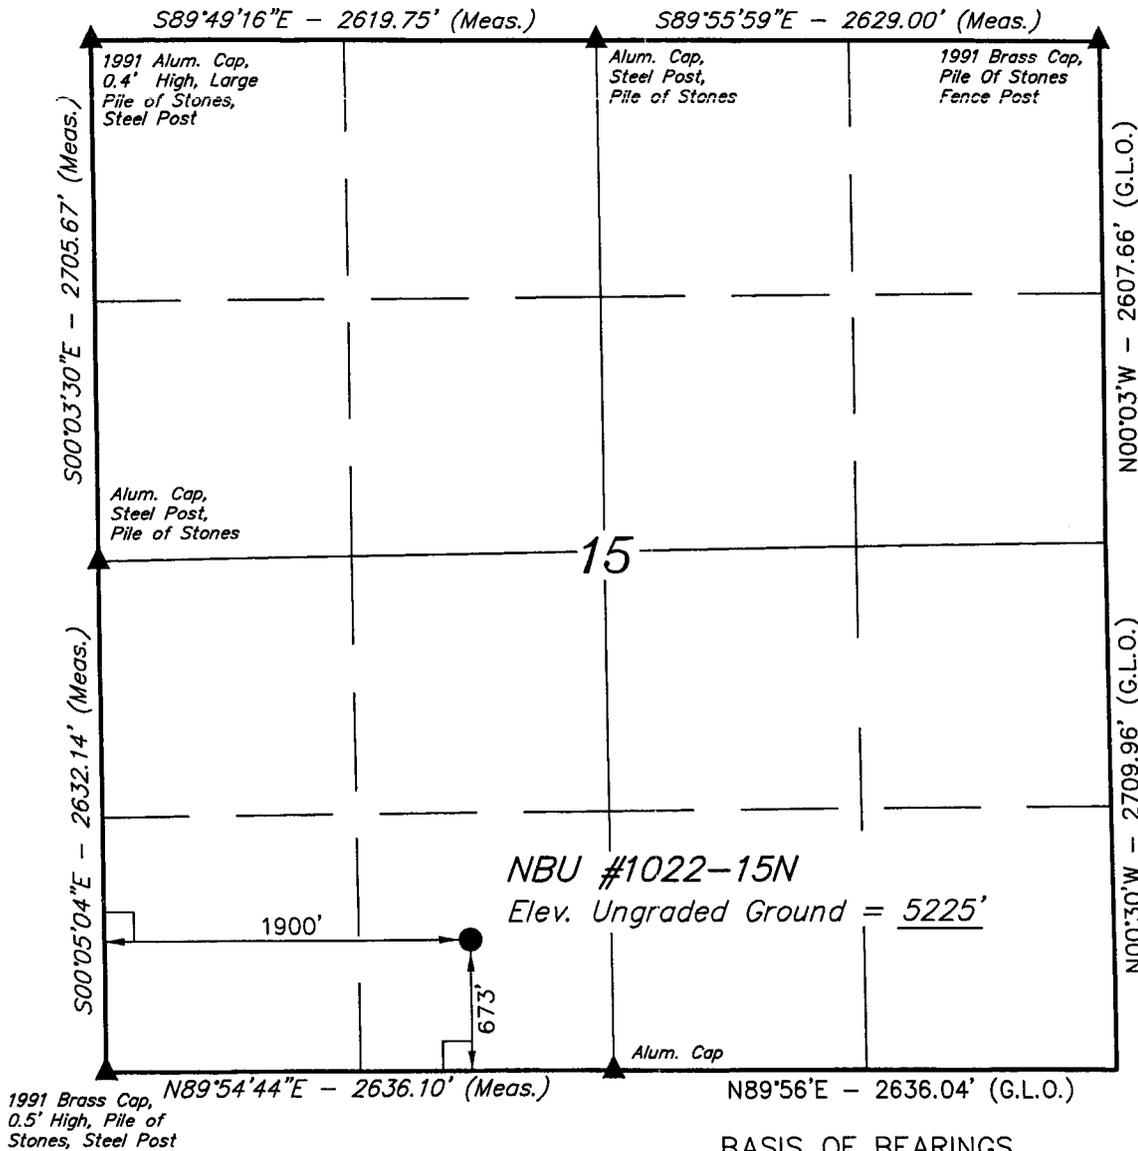


### BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE QUADRANGLE, UTAH, UTAH COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

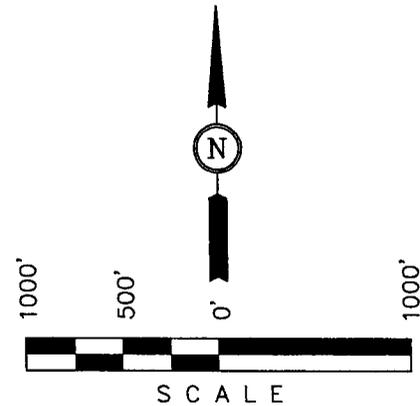

### CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



### BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

### LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)  
 LATITUDE =  $39^{\circ}56'36.46''$  (39.943461)  
 LONGITUDE =  $109^{\circ}25'42.81''$  (109.428558)  
 (NAD 27)  
 LATITUDE =  $39^{\circ}56'36.58''$  (39.943494)  
 LONGITUDE =  $109^{\circ}25'40.36''$  (109.427878)

UTAH ENGINEERING & LAND SURVEYING  
 85 SOUTH 200 EAST - VERNAL, UTAH 84078  
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 05-18-06	DATE DRAWN: 05-23-06
PARTY J.R. A.A. C.H.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE Kerr-McGee Oil & Gas Onshore LP	

NBU #1022-15N  
SESW SEC 15, T10S, R22E  
UINTAH COUNTY, UTAH  
UTU-01198-B

ONSHORE ORDER NO. 1

**DRILLING PROGRAM**

1. **Estimated Tops of Important Geologic Markers:**

<u>Formation</u>	<u>Depth</u>
Uinta	0- Surface
Green River	1098'
Top of Birds Nest Water	1301'
Mahogany	1857'
Wasatch	4129'
Mesaverde	6422'
MVU2	7444'
MVL1	7953'
TD	8440'

2. **Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:**

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
	Green River	1098'
	Top of Birds Nest Water	1301'
	Mahogany	1857'
	Wasatch	4129'
Gas	Mesaverde	6422'
Gas	MVU2	7444'
Gas	MVL1	7953'
Water	N/A	
Other Minerals	N/A	

3. **Pressure Control Equipment** (Schematic Attached)

*Please see the Natural Buttes Unit Standard Operating Procedure (SOP).*

4. **Proposed Casing & Cementing Program:**

*Please see the Natural Buttes Unit SOP.*

5. **Drilling Fluids Program:**

*Please see the Natural Buttes Unit SOP.*

6. **Evaluation Program:**

*Please see the Natural Buttes Unit SOP.*

7. **Abnormal Conditions:**

Maximum anticipated bottomhole pressure calculated at 8440' TD, approximately equals 5233 psi (calculated at 0.62 psi/foot).

Maximum anticipated surface pressure equals approximately 3376 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. **Anticipated Starting Dates:**

*Drilling is planned to commence immediately upon approval of this application.*

9. **Variations:**

*Please see Natural Buttes Unit SOP.*

10. **Other Information:**

*Please see Natural Buttes Unit SOP.*



# KERR-McGEE OIL & GAS ONSHORE LP DRILLING PROGRAM

COMPANY NAME KERR-McGEE OIL & GAS ONSHORE LP DATE December 4, 2006  
 W/ELL NAME NBU 1022-15N TD 8,400' MD/TVD \_\_\_\_\_  
 FIELD Natural Buttes COUNTY Uintah STATE Utah ELEVATION 5,224' GL KB 5,239'  
 SURFACE LOCATION SESW SECTION 15, T10S, R22E 673'FSL, 1900'FWL BHL Straight Hole  
 Latitude: 39.943461 Longitude: 109.428558  
 OBJECTIVE ZONE(S) Wasatch/Mesaverde  
 ADDITIONAL INFO Regulatory Agencies: BLM (SURF & MINERALS), UDOGM, Tri-County Health Dept.

GEOLOGICAL FORMATION		MECHANICAL			
LOGS	TOPS	DEPTH	HOLE SIZE	CASING SIZE	MUD WEIGHT
		40'		14"	
			12-1/4"	9-5/8", 32.3#, H-40, STC	Air mist
Catch water sample, if possible, from 0 to 4,129' <div style="margin-left: 100px;">Green River @ 1,098'</div> <div style="margin-left: 100px;">Top of Birds Nest Water @ 1301'</div>					
		Preset ff/ GL @ 1,810' MD			
Note: 12.25" surface hole will usually be drilled ±400' below the bottom of lost circulation zone. Drilled depth may be ±200' of the estimated set depth depending on the actual depth of the loss zone.					
		Mahogany ( 1,857'			Water/Fresh Water Mud 8.3-11.2 ppg
Mud logging program TBD Open hole logging program / TD - surf csg			7-7/8"	4-1/2", 11.6#, I-80 or equivalent LTC casing	
		Wasatch @ 4,129'			
		Mverde @ 6,422'			
		MVU2 @ 7,444'			
		MVL1 @ 7,953'			
		TD @ 8,440'			Max anticipated Mud required 11.2 ppg



**KERR-McGEE OIL & GAS ONSHORE LP**  
**DRILLING PROGRAM**

**CASING PROGRAM**

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'				2270	1370	254000
SURFACE	9-5/8"	0 to 1810	32.30	H-40	STC	0.74*****	1.62	4.96
PRODUCTION	4-1/2"	0 to 8440	11.60	I-80	LTC	2.54	1.29	201000

- 1) Max Anticipated Surf. Press.(MASP) (Surface Casing) = (Pore Pressure at next csg point-(0.22 psi/ft-partial evac gradient x TVD of next csg point)  
 2) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft-partial evac gradient x TD)  
 (Burst Assumptions: TD = 11.2 ppg) .22 psi/ft = gradient for partially evac wellbore  
 (Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing\*Buoy.Fact. of water)  
 MASP 3059 psi  
 \*\*\*\*\* Burst SF is low but csg is much stronger than formation at 2000'. EMW @ 2000' for 2270# is 21.8 ppg or 1.13 psi/ft

**CEMENT PROGRAM**

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	LEAD	500	Premium cmt + 2% CaCl + .25 pps flocele	215	60%	15.60	1.18
Option 1	TOP OUT CMT (1)	200	20 gals sodium silicate + Premium cmt + 2% CaCl + .25 pps flocele	50		15.60	1.18
	TOP OUT CMT (2)	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
<b>NOTE: If well will circulate water to surface, option 2 will be utilized</b>							
SURFACE	LEAD	1500	Prem cmt + 16% Gel + 10 pps gilsonite + .25 pps Flocele + 3% salt BWOC	170	35%	11.00	3.82
Option 2	TAIL	500	Premium cmt + 2% CaCl + .25 pps flocele	180	35%	15.60	1.18
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
PRODUCTION	LEAD	3,620'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	400	60%	11.00	3.38
	TAIL	4,820'	50/50 Poz/G + 10% salt + 2% gel + .1% R-3	1350	60%	14.30	1.31

\*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained  
 \*Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

**FLOAT EQUIPMENT & CENTRALIZERS**

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.


**ADDITIONAL INFORMATION**

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.  
 BOPE: 11" 5M with one annular and 2 rams. Test to 5,000 psi (annular to 2,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.  
 Drop Totco surveys every 2000'. Maximum allowable hole angle is 5 degrees.  
 Most rigs have PVT Systems for mud monitoring. If no PVT is available, visual monitoring will be utilized.

DRILLING ENGINEER: \_\_\_\_\_  
 Brad Laney  
 DRILLING SUPERINTENDENT: \_\_\_\_\_  
 Randy Bayne

DATE: \_\_\_\_\_  
 DATE: \_\_\_\_\_

# 5M BOP STACK and CHOKE MANIFOLD SYSTEM

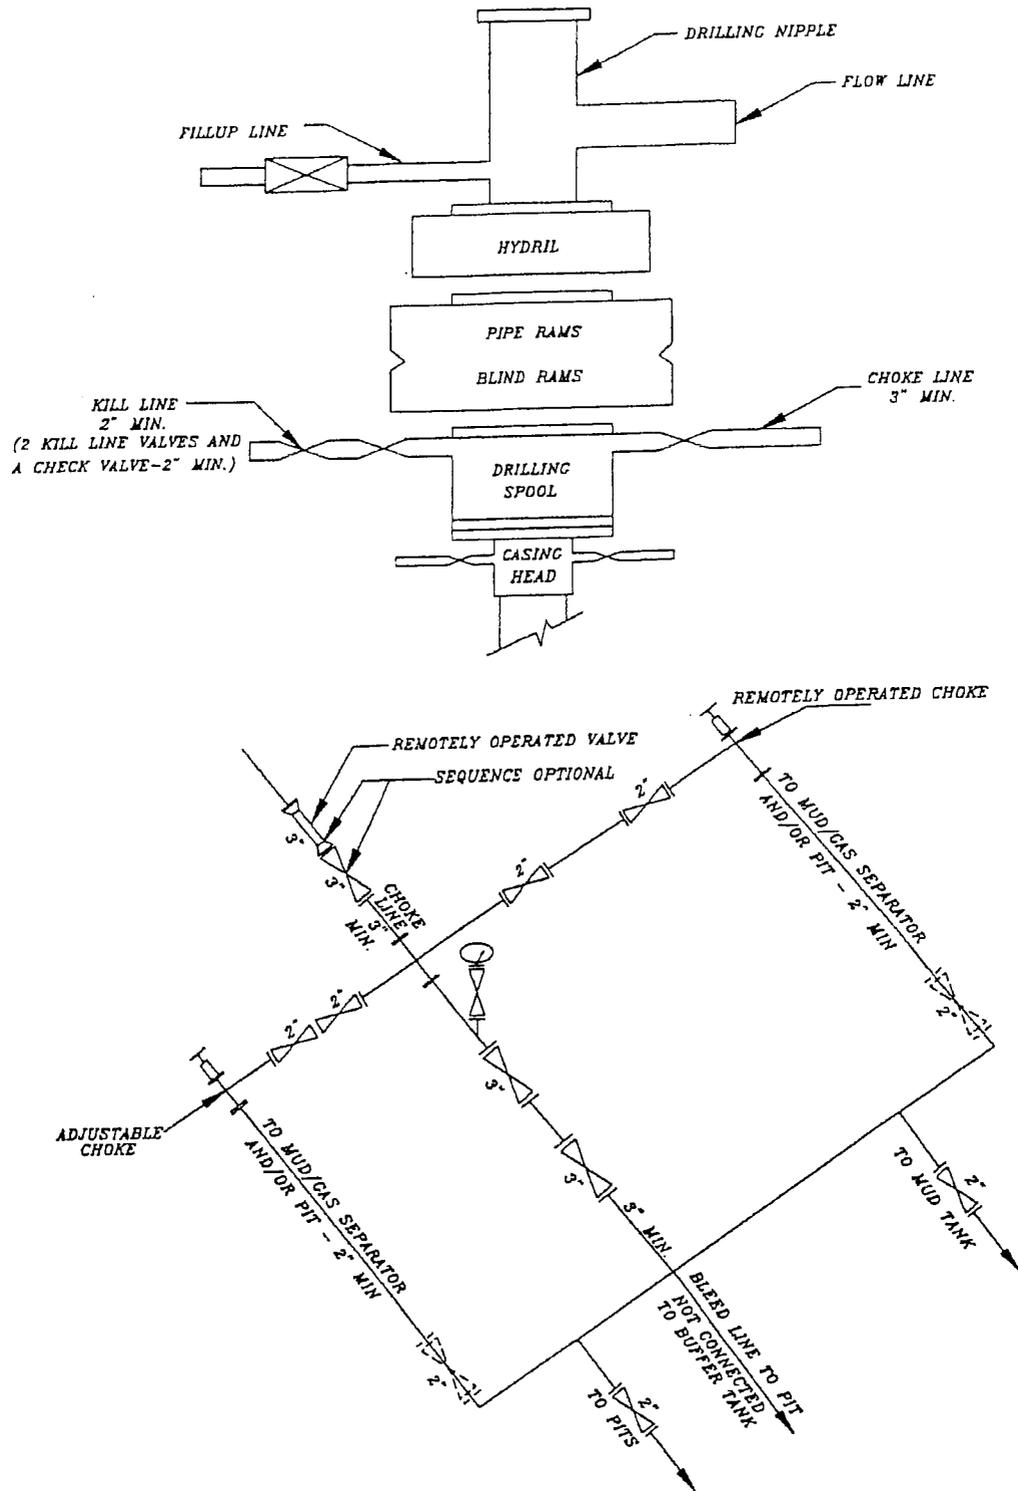

NBU #1022-15N  
SESW SEC 15, T10S, R22E  
UINTAH COUNTY, UTAH  
UTU-01198-B

ONSHORE ORDER NO. 1

*MULTI-POINT SURFACE USE & OPERATIONS PLAN*

1. **Existing Roads:**

Refer to the attached location directions.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

2. **Planned Access Roads:**

*Please see the Natural Buttes Unit Standard Operating Procedure (SOP).*

Approximately 0.1 +/- miles of re-route access road is proposed. Please refer to the attached Topo Map B.

Approximately 260' +/- of proposed access road The proposed access road from the proposed location. Refer to TOPO Map B.

3. **Location of Existing Wells Within a 1-Mile Radius:**

Please refer to Topo Map C.

4. **Location of Existing & Proposed Facilities:**

*Please see the Natural Buttes Unit SOP.*

A 30' of rights-of-way is required. Approximately 717' +/- of 6" pipeline is proposed from the location, to cross into Sec. 22, T10S, R22E (Lease #UTU-01198-B), the pipeline shall tie-into an tie-in point. Approximately 1511' +/- of 4" pipeline is proposed from a tie-in point in Section 22, T10S, R22E to the proposed pipeline for the NBU 1022-22D tie-in point. Please refer to the attached Topo Map D.

**Variances to Best Management Practices (BMPs) Requested:**

The pipeline shall be installed on surface within the access corridor for the well location. As a Best Management Practice (BMP), the pipeline would be buried within the access road corridor if possible. The construction of pipelines requires the corridor of 30 feet.

This exception to the BMP should be granted by the BLM Authorized Officer because indurated bedrock, such as sandstone, is at or within 2 feet of the surface and the soil has a poor history for successful rehabilitation.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The requested color is Carlsbad Canyon Brown (2.5Y 6/2), a non-reflective earthtone.

5. **Location and Type of Water Supply:**

*Please see the Natural Buttes SOP.*

6. **Source of Construction Materials:**

*Please see the Natural Buttes SOP.*

7. **Methods of Handling Waste Materials:**

*Please see the Natural Buttes SOP.*

Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec. 35, T9S R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E (*Request is in lieu of filing Form 3160-5, after initial production*).

8. **Ancillary Facilities:**

*Please see the Natural Buttes SOP.*

9. **Well Site Layout:** (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

A 20 mil reserve pit liner with felt (**Double Layer**) will be used. As discussed at the on-site inspection.

Location size may change prior to the drilling of the well due to the current rig availability. If the proposed location is not large enough to accommodate the drilling rig. The location will be re-surveyed and a form 3160-5 will be submitted.

10. **Plans for Reclamation of the Surface:**

*Please see the Natural Buttes SOP.*

When the pit is backfilled, the topsoil pile shall be spread on the location up to the rig anchor points. The location will be reshaped to the original contour to the extent possible. The following seed mixture will be used to reclaim the surface for interim reclamation using appropriate reclamation methods. A total of 12 lbs/acre will be used if the seeds are drilled (24 lbs/acre if the seeds are broadcast). The per acre requirements for *drilled* seed are:

Galleta Grass

20 lbs.

Operator shall call the BLM for the seed mixture when final reclamation occurs.

11. **Surface Ownership:**

The well pad and access road are located on lands owned by:

United States of America  
Bureau of Land Management  
170 South 500 East  
Vernal, UT 84078  
(435)781-4400

12. **Other Information:**

A Class III archaeological survey has been performed and completed on June 15, 2006; The archaeological report No. 06-245 is attached. The paleontological survey have been performed and completed on August 22, 2006 the paleontological survey report No. 06-192; these reports are being submitted along with the Application for Permit to Drill.

**WILDLIFE STIPULATIONS:**

**ANTELOPE:** No construction or drilling May 15<sup>th</sup> – June 20<sup>th</sup>.

**GOLDEN EAGLE:** No construction or drilling February 1<sup>st</sup> – July 15<sup>th</sup>.  
These stipulations may be waived if letter sent into the BLM for waiver.

13. **Lessee's or Operator's Representative & Certification:**

Sheila Ucphego  
Regulatory Analyst  
Kerr-McGee Oil & Gas Onshore LP  
1368 South 1200 East  
Vernal, UT 84078  
(435) 781-7024

Randy Bayne  
Drilling Manager  
Kerr-McGee Oil & Gas Onshore LP  
1368 South 1200 East  
Vernal, UT 84078  
(435) 781-7018


Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

Kerr-McGee Oil & Gas Onshore LP is considered to be the operator of the subject well. Kerr-McGee Oil & Gas Onshore LP agrees to be responsible under the terms and conditions of the lease for the operations conducted upon leased lands.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by BLM Nationwide Bond #WY-2357.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

  
Sheila Upchego

12/4/2006  
Date

Kerr-McGee Oil & Gas Onshore LP  
NBU #1022-15N  
SECTION 15, T10S, R22E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 11.2 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 10.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY DIRECTION APPROXIMATELY 1.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN RIGHT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 0.8 MILES TO THE BEGINNING OF THE ROAD RE-ROUTE TO THE NORTHEAST; FOLLOW ROAD FLAGS IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.1 MILES TO AN EXISTING ROAD TO THE NORTHEAST; PROCEED IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.4 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTHWEST; FOLLOW ROAD FLAGS IN A NORTHWESTERLY DIRECTION APPROXIMATELY 260' TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 55.9 MILES.

# Kerr-McGee Oil & Gas Onshore LP

NBU #1022-15N  
LOCATED IN UINTAH COUNTY, UTAH  
SECTION 15, T10S, R22E, S.L.B.&M.

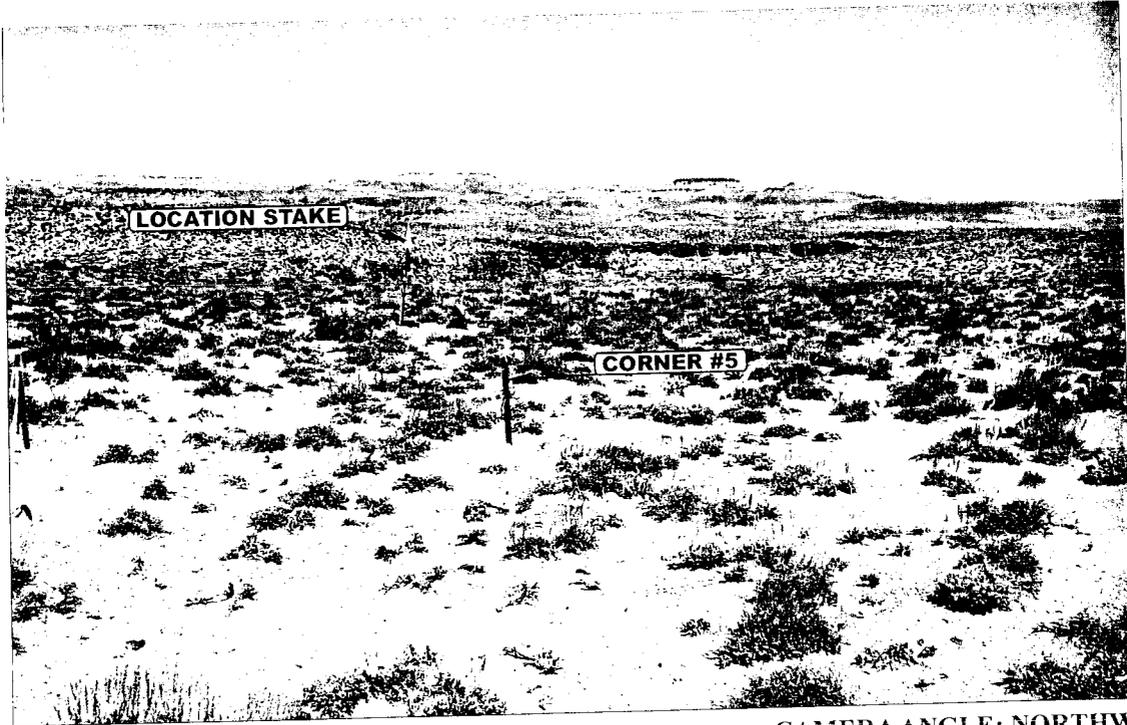


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY

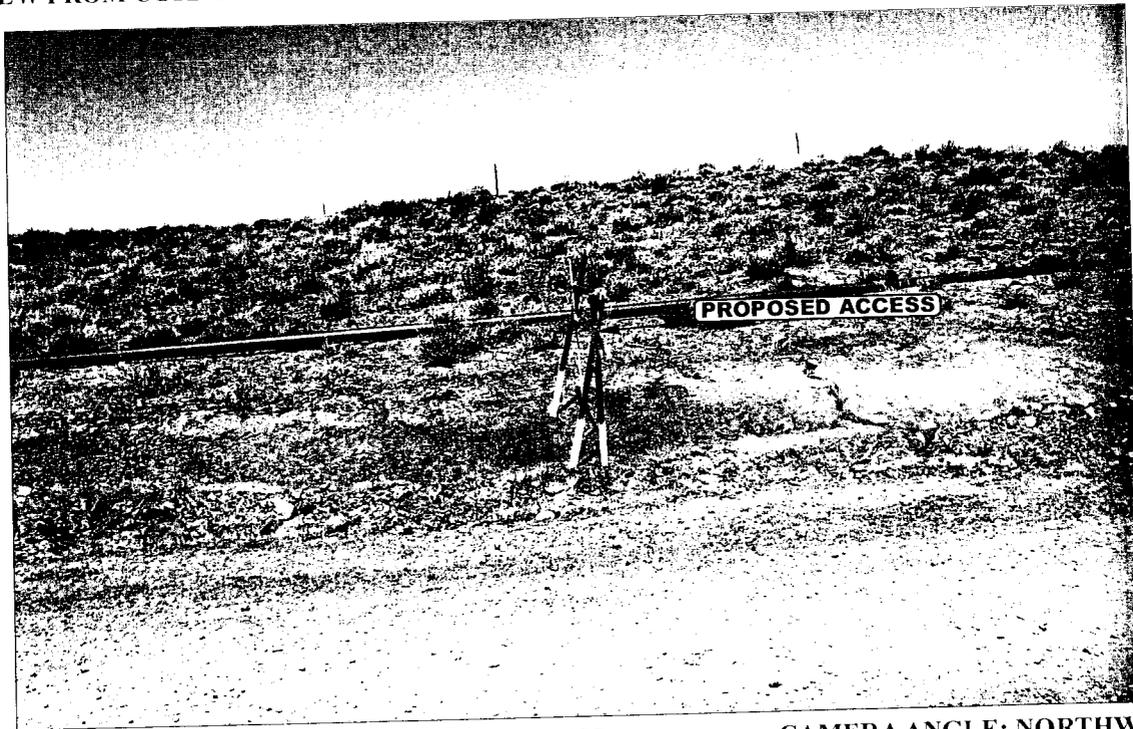


PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS


CAMERA ANGLE: NORTHWESTERLY



**E&L S** Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS	05	19	06	PHOTO
	MONTH	DAY	YEAR	
TAKEN BY: J.R.	DRAWN BY: C.P.		REVISED: 00-00-00	

- Since 1964 -

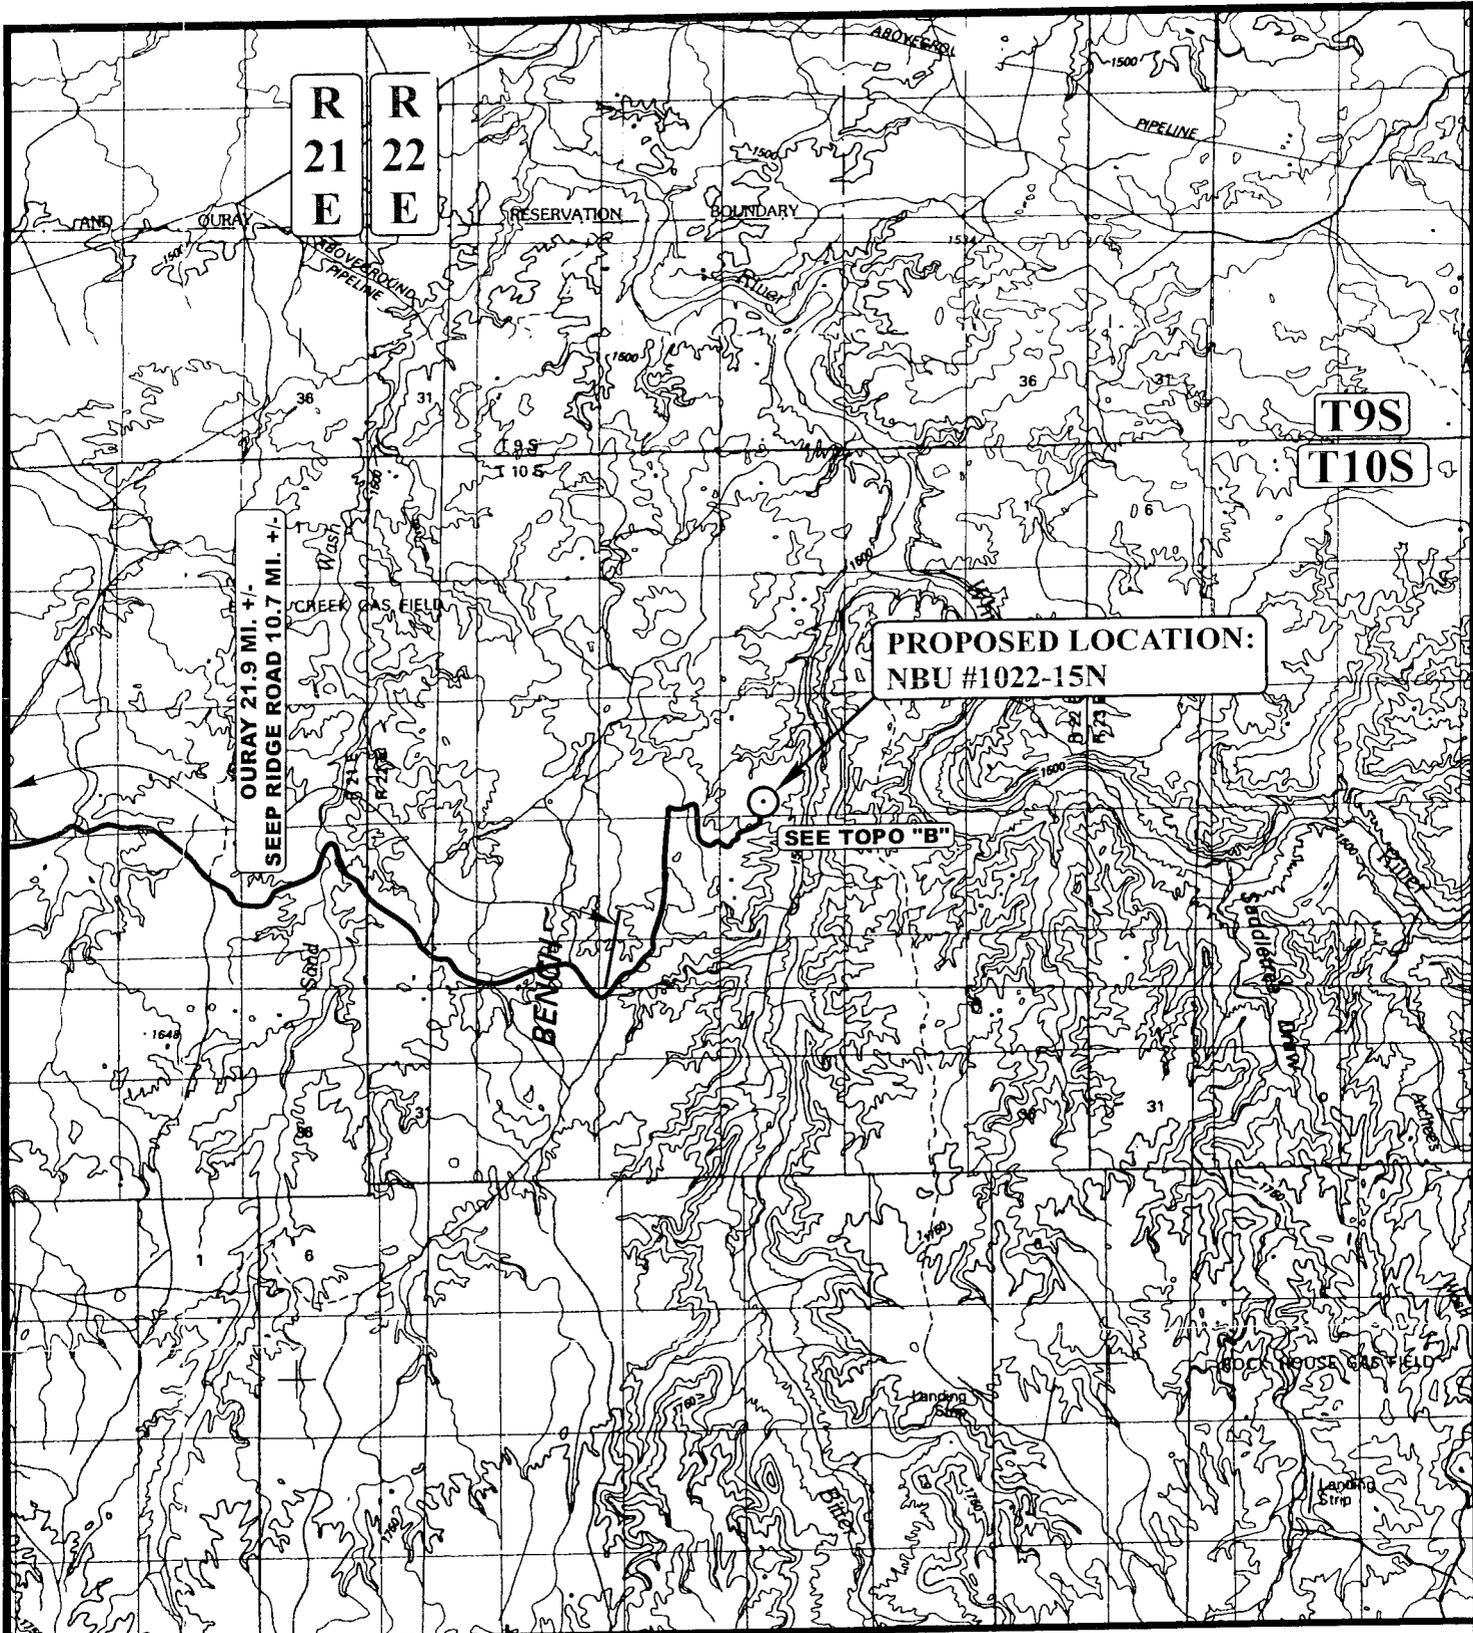

**LEGEND:**

○ PROPOSED LOCATION



Uintah Engineering & Land Surveying  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813




**Kerr-McGee Oil & Gas Onshore LP**

NBU #1022-15N  
 SECTION 15, T10S, R22E, S.L.B.&M.  
 673' FSL 1900' FWL

TOPOGRAPHIC	05	19	06
MAP	MONTH	DAY	YEAR
SCALE: 1:100,000	DRAWN BY: C.P.		REVISED: 00-00-00



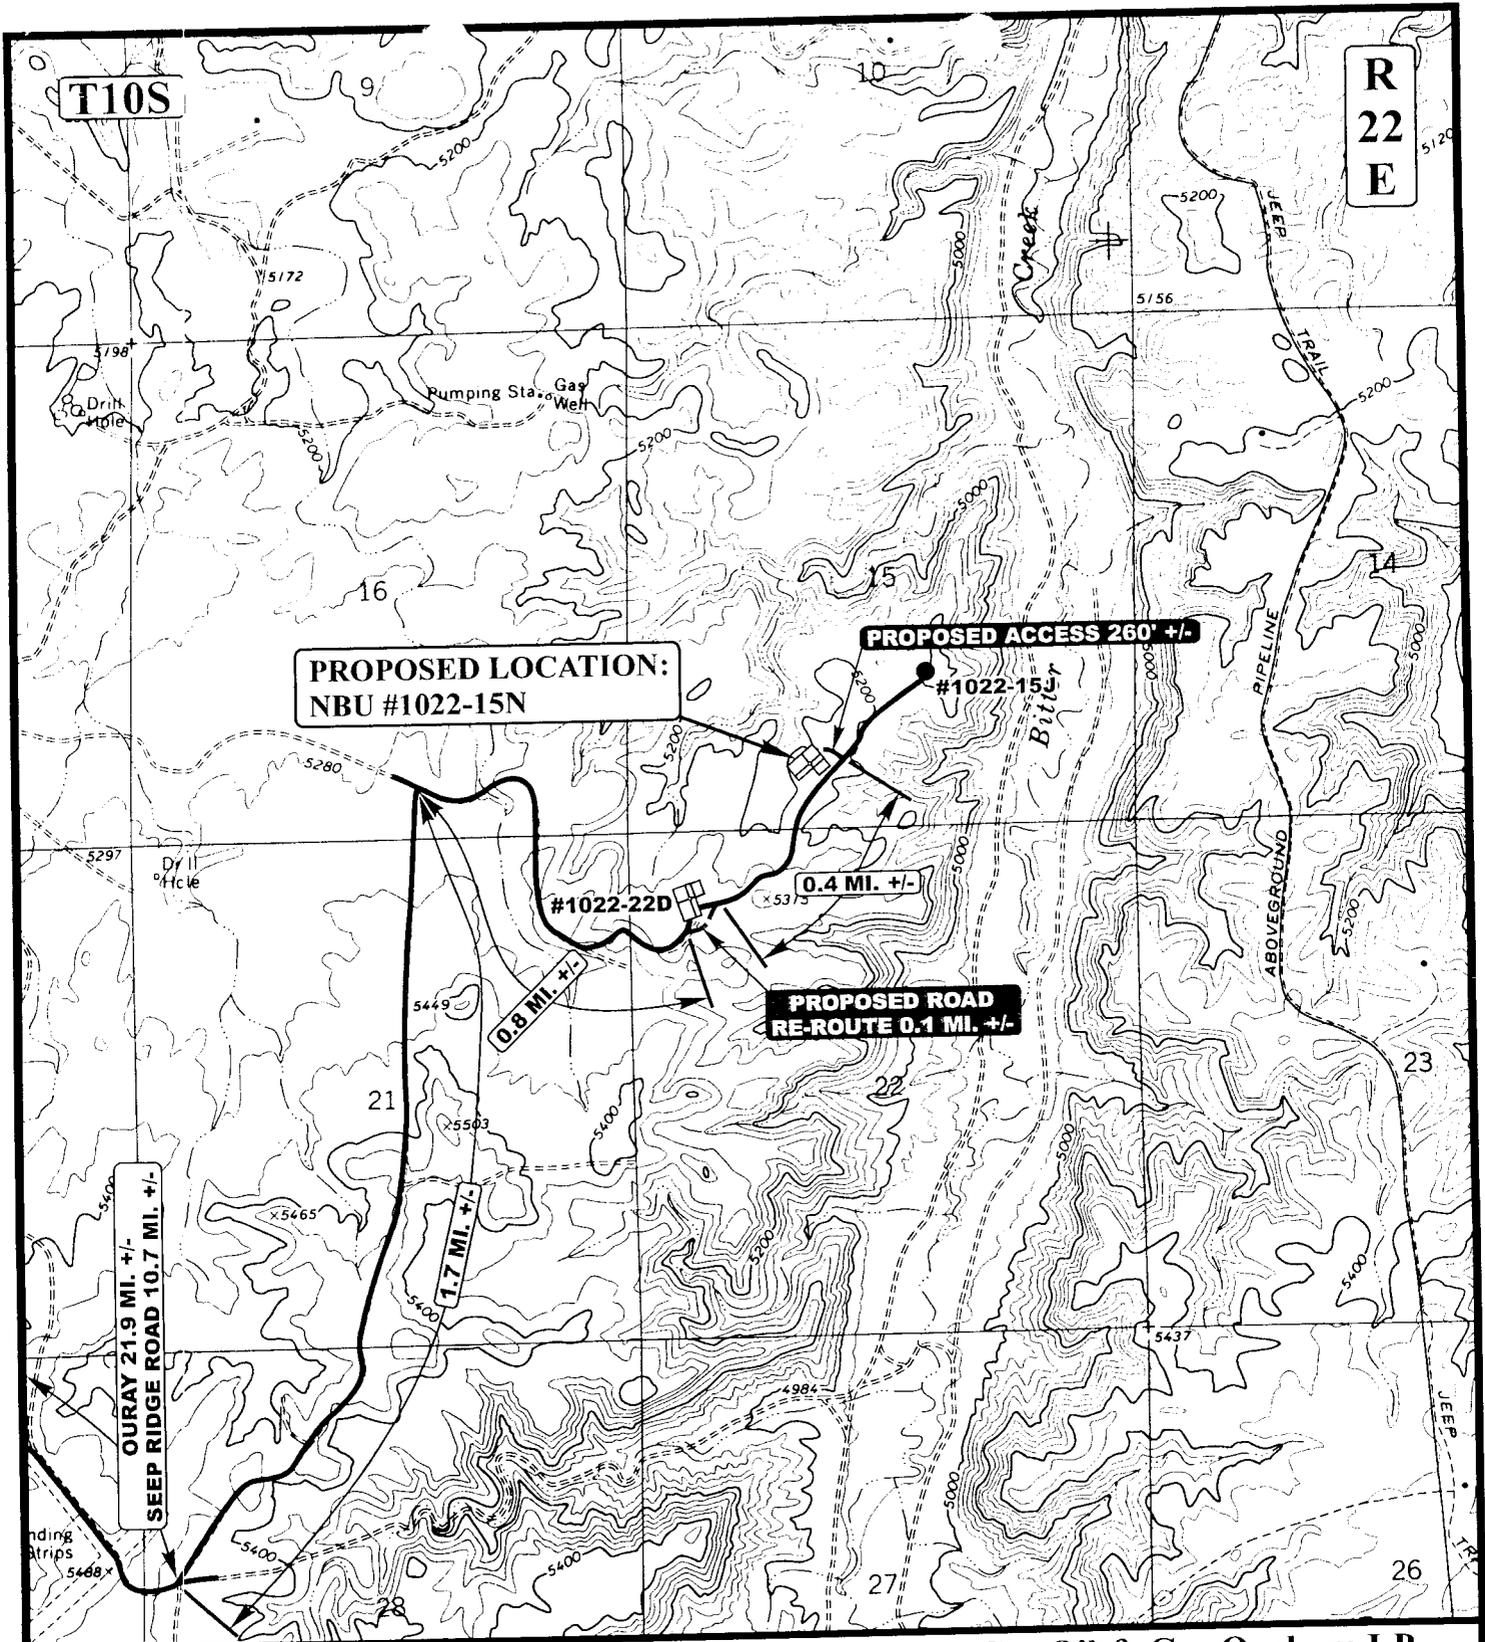

**LEGEND:**

- EXISTING ROAD
- PROPOSED ACCESS ROAD
- PROPOSED ROAD RE-ROUTE

**Kerr-McGee Oil & Gas Onshore LP**


NBU #1022-15N  
 SECTION 15, T10S, R22E, S.L.B.&M.  
 673' FSL 1900' FWL



**Utah Engineering & Land Surveying**  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC** 05 19 06  
 MAP MONTH DAY YEAR  
 SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00



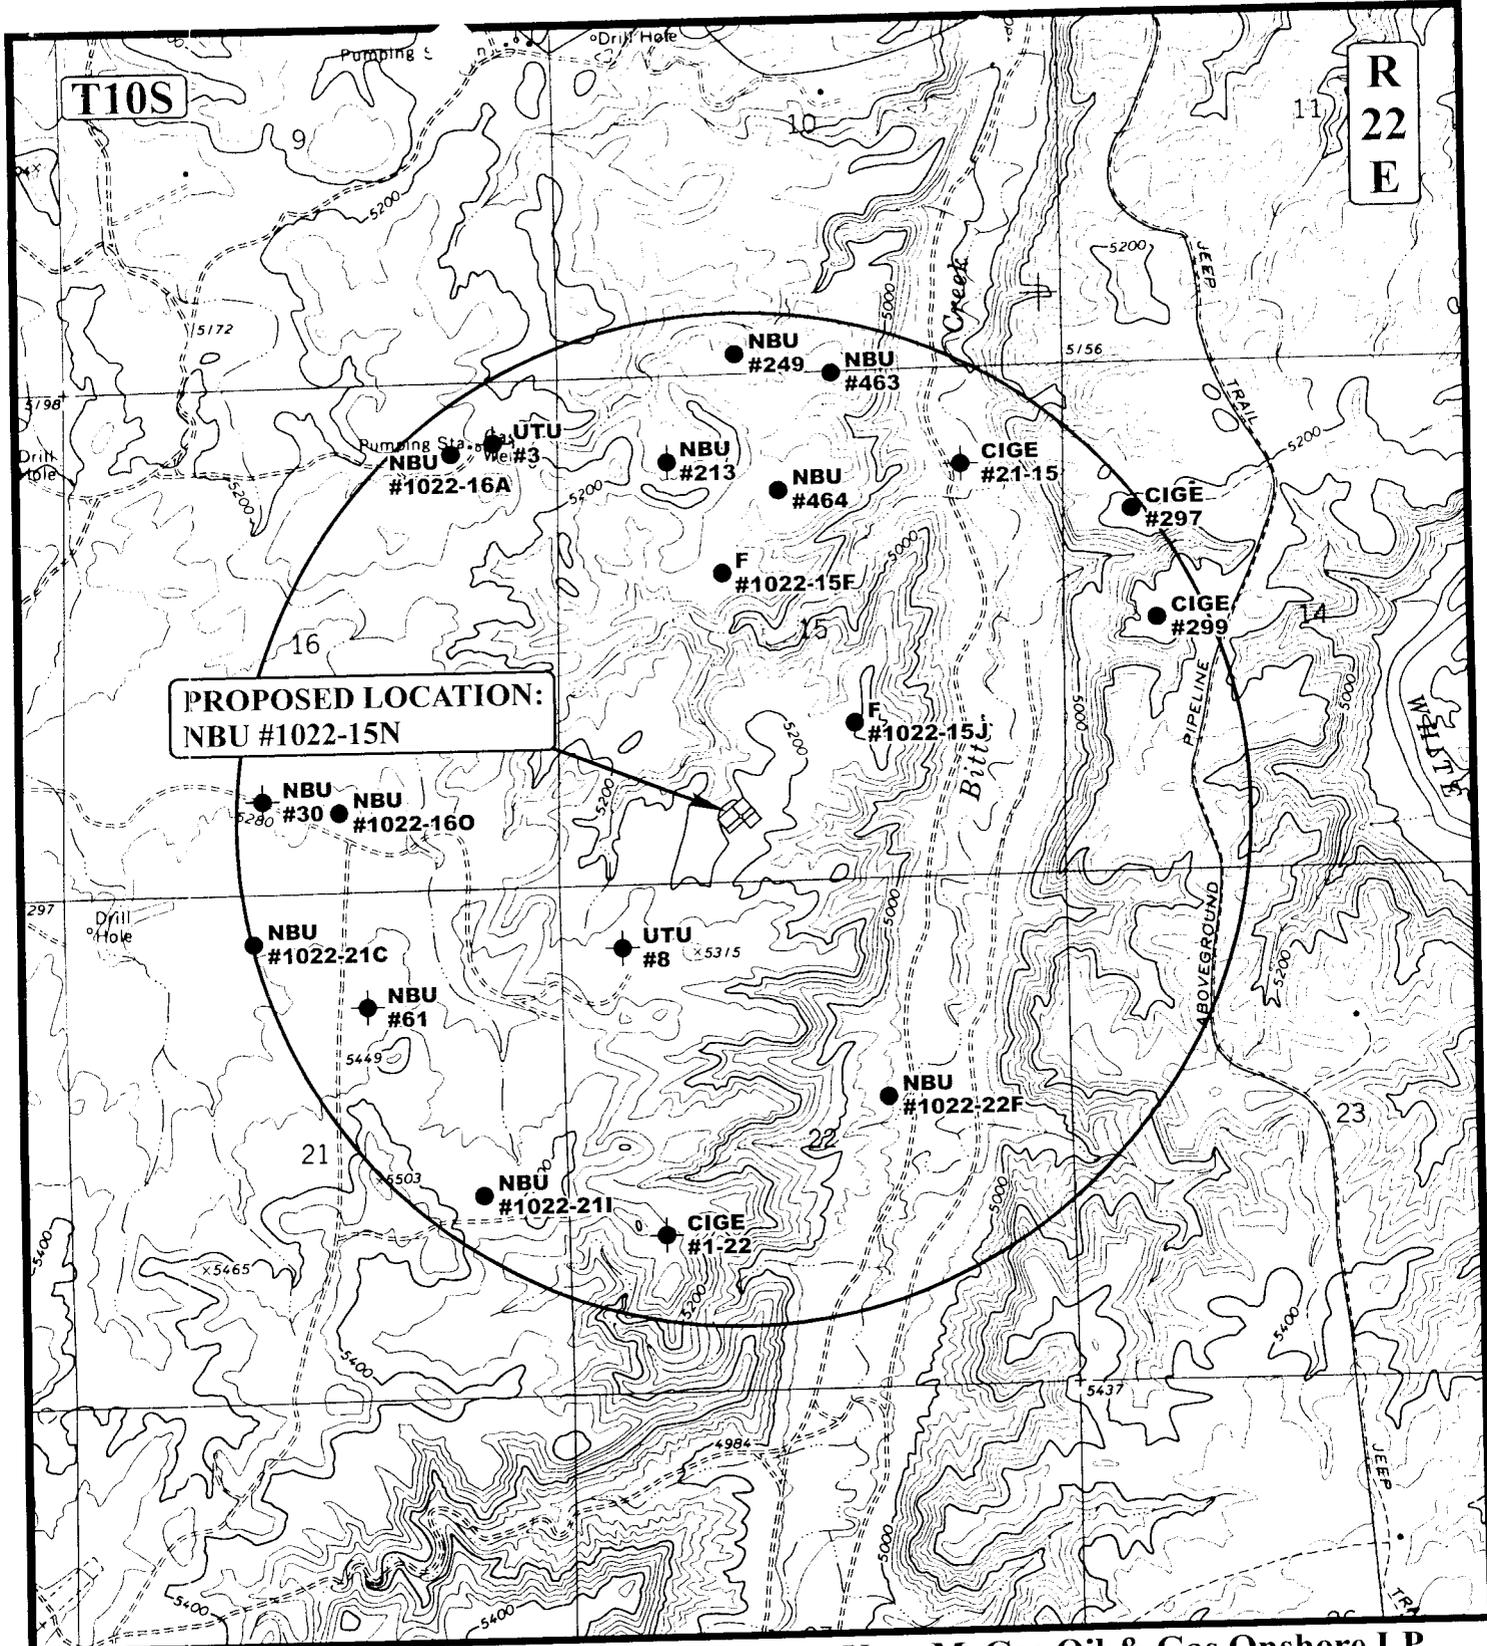

**PROPOSED LOCATION:  
NBU #1022-15N**

**LEGEND:**

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ⊗ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED

**Kerr-McGee Oil & Gas Onshore LP**

**NBU #1022-15N  
SECTION 15, T10S, R22E, S.L.B.&M.  
673' FSL 1900' FWL**




**Utah Engineering & Land Surveying**  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813



<b>TOPOGRAPHIC MAP</b>	<b>05</b>	<b>19</b>	<b>06</b>
	MONTH	DAY	YEAR
SCALE: 1" = 2000'	DRAWN BY: C.P.		REVISED: 00-00-00



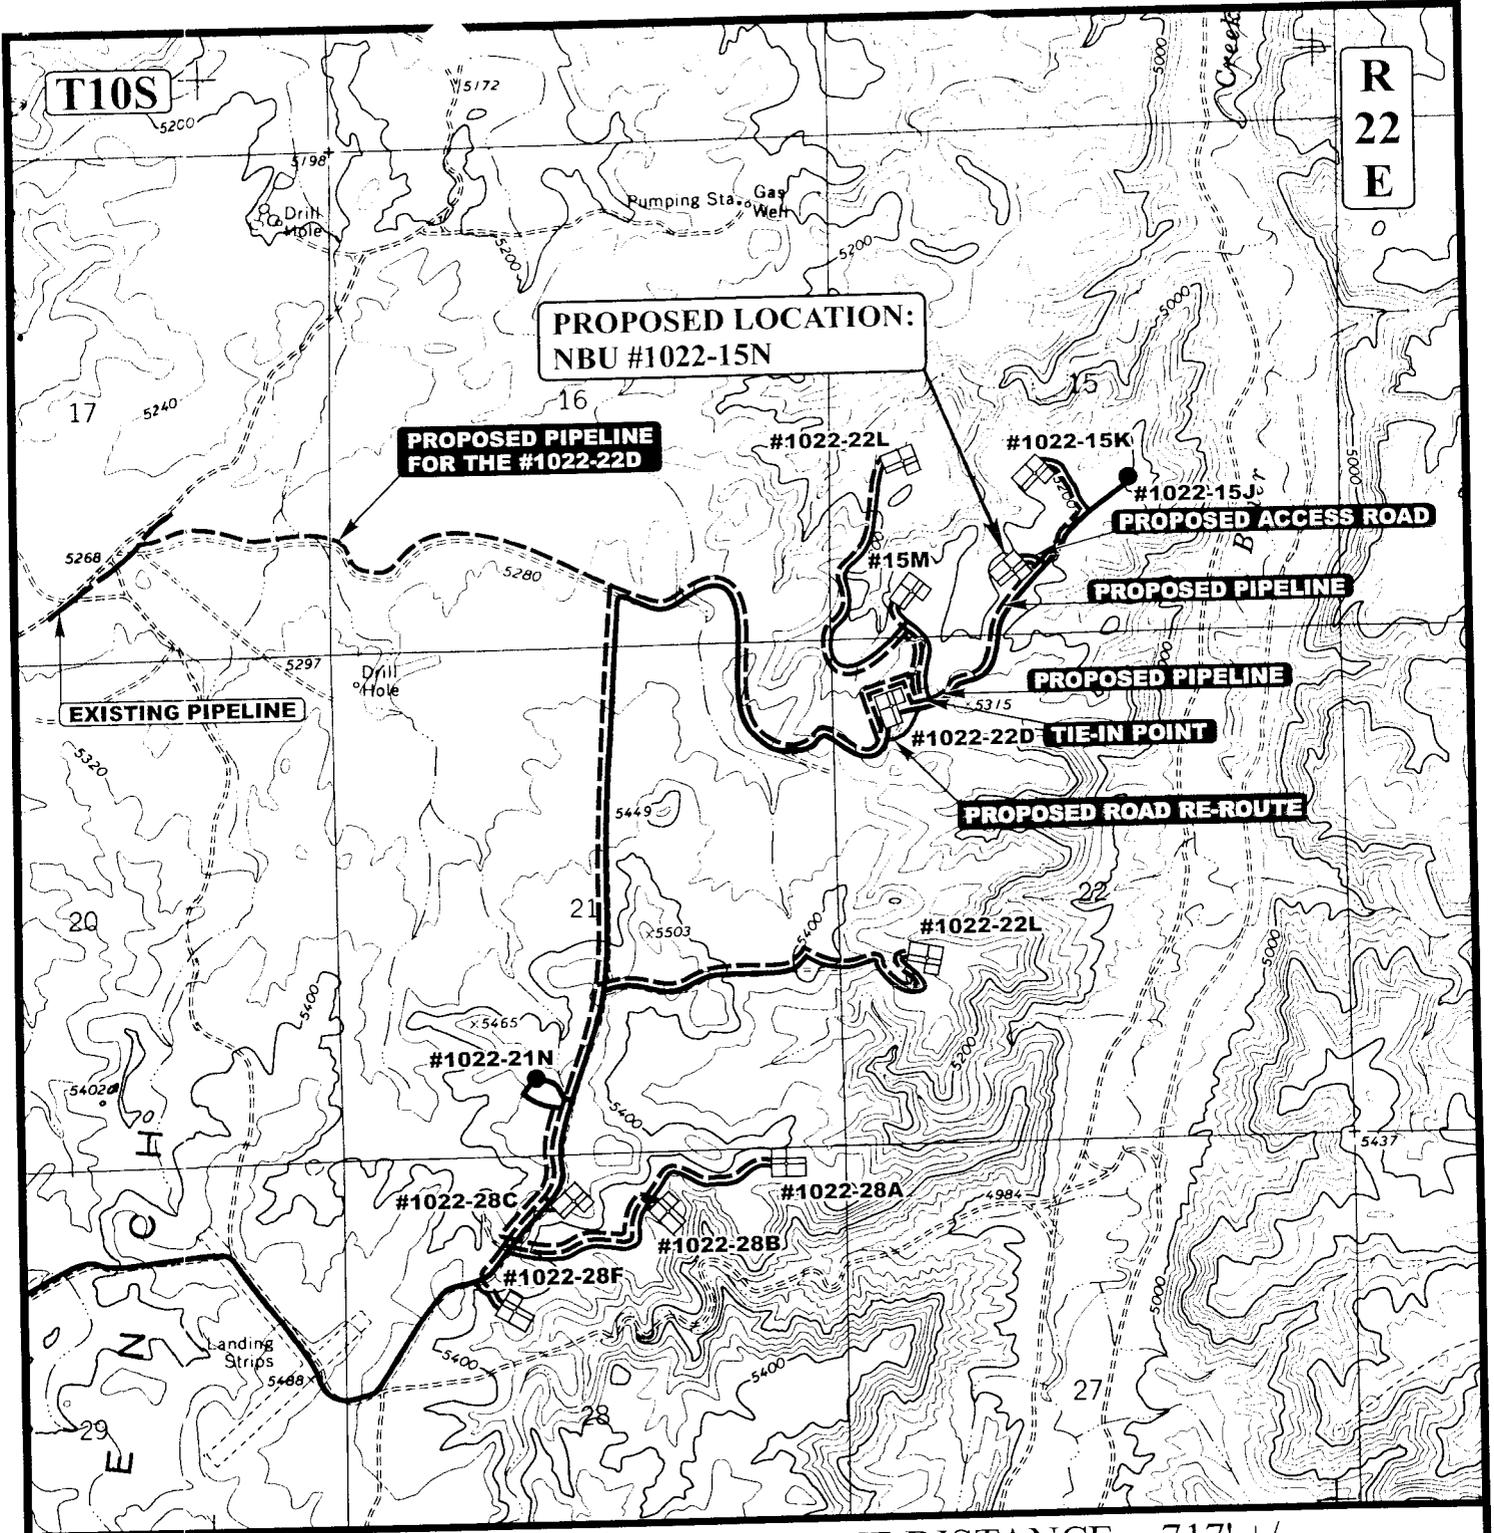

APPROXIMATE TOTAL 6" PIPELINE DISTANCE = 717' +/-  
 APPROXIMATE TOTAL 4" PIPELINE DISTANCE = 1,511' +/-

**LEGEND:**

- PROPOSED ROAD RE-ROUTE
- EXISTING PIPELINE
- PROPOSED ACCESS ROAD
- PROPOSED PIPELINE
- PROPOSED PIPELINE (SERVICING OTHER WELLS)

**Kerr-McGee Oil & Gas Onshore LP**

**NBU #1022-15N**  
**SECTION 15, T10S, R22E, S.L.B.&M.**  
**673' FSL 1900' FWL**

**UEIS** Uintah Engineering & Land Surveying  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813



**TOPOGRAPHIC MAP** **05 19 06**  
 MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00 **D TOPO**

# Kerr-McGee Oil & Gas Onshore LP

NBU #1022-15N  
PIPELINE ALIGNMENT  
LOCATED IN UINTAH COUNTY, UTAH  
SECTION 15, T10S, R22E, S.L.B.&M.

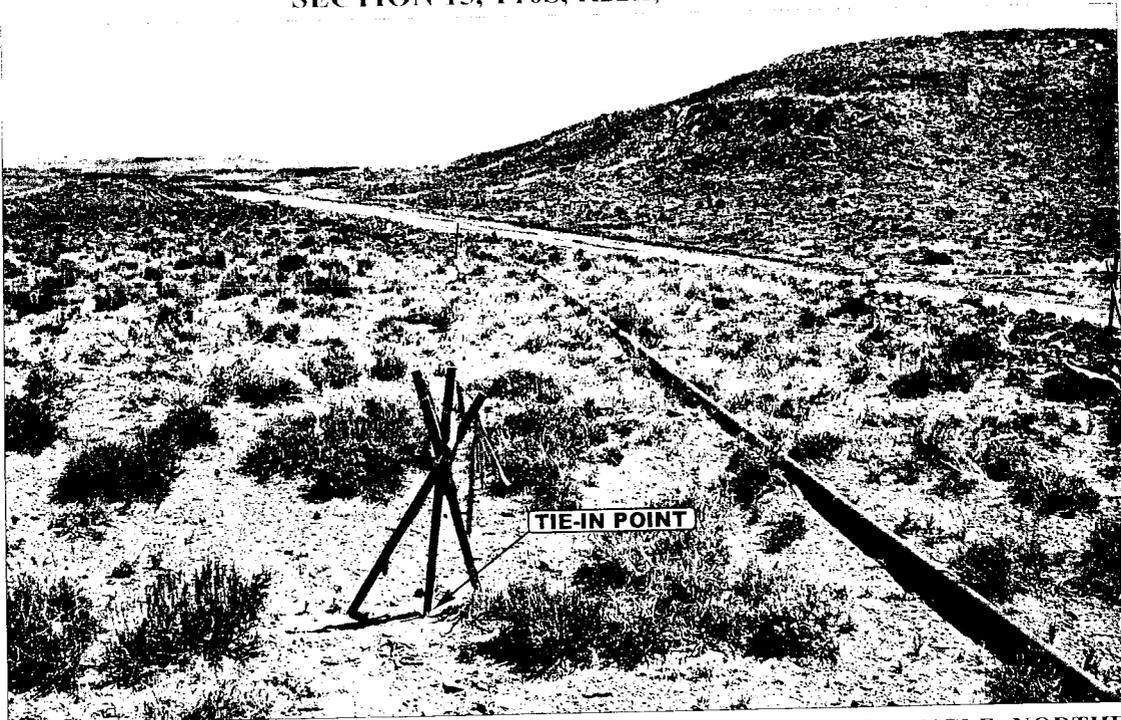


PHOTO: VIEW FROM TIE-IN POINT

CAMERA ANGLE: NORTHEASTERLY

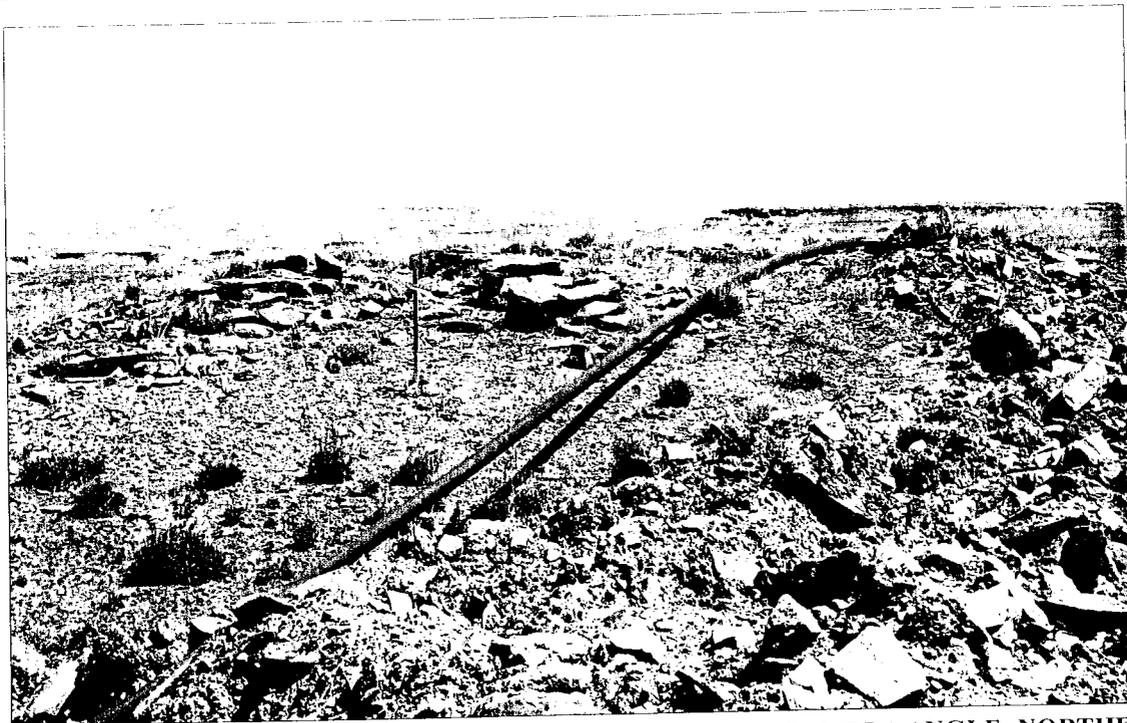


PHOTO: VIEW OF PIPELINE ALIGNMENT

CAMERA ANGLE: NORTHEASTERLY



- Since 1964 -

**E&L S** Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
435-789-1017 uels@uelsinc.com

PIPELINE PHOTOS

05 19 06  
MONTH DAY YEAR

PHOTO

TAKEN BY: J.R.


DRAWN BY: C.P.

REVISED: 00-00-00

McGee Oil & Gas Onshore LP

LOCATION LAYOUT FOR

NBU #1022-15N  
SECTION 15, T10S, R22E, S.L.B.&M.  
673' FSL 1900' FWL

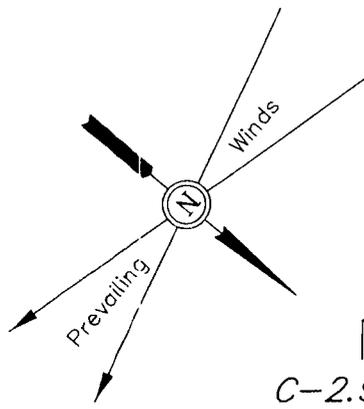

SCALE: 1" = 50'  
DATE: 05-23-06  
Drawn By: C.H.


F-8.1'  
El. 15.5'

Sta. 3+50

C-2.9'  
El. 26.5'

C-0.2'  
El. 23.8'

Round Corners  
as Needed



Approx.  
Top of  
Cut Slope

NOTE:

Flare Pit is to be located  
a min. of 100' from the  
Well Head.

Existing  
Pipeline

Reserve Pit Backfill  
& Spoils Stockpile

El. 27.2'  
C-13.6'  
(btm. pit)

C-3.8'  
El. 27.4'


C-1.8'  
El. 25.4'

Sta. 1+50

F-9.5'  
El. 14.1'

Sta. 0+00

F-9.5'  
El. 14.1'

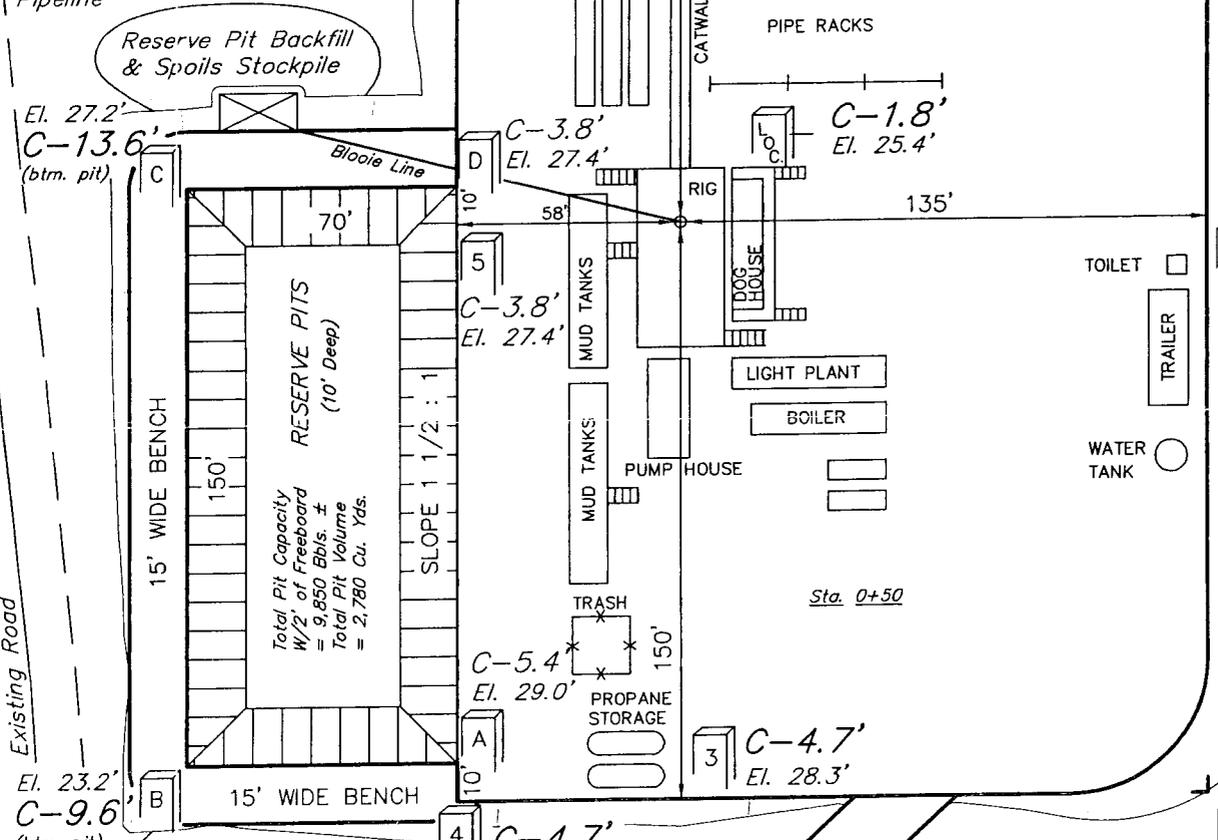

NOTES:

Elev. Ungraded Ground At Loc. Stake = 5225.4'  
FINISHED GRADE ELEV. AT LOC. STAKE = 5223.6'

Proposed Access  
Road

FIGURE #1

TYPICAL CROSS SECTIONS FOR

NBU #1022-15N

SECTION 15, T10S, R22E, S.L.B.&M.





673' FSL 1900' FWL



1" = 20'  
X-Section  
Scale  
1" = 50'

DATE: 05-23-06

Drawn By: C.H.

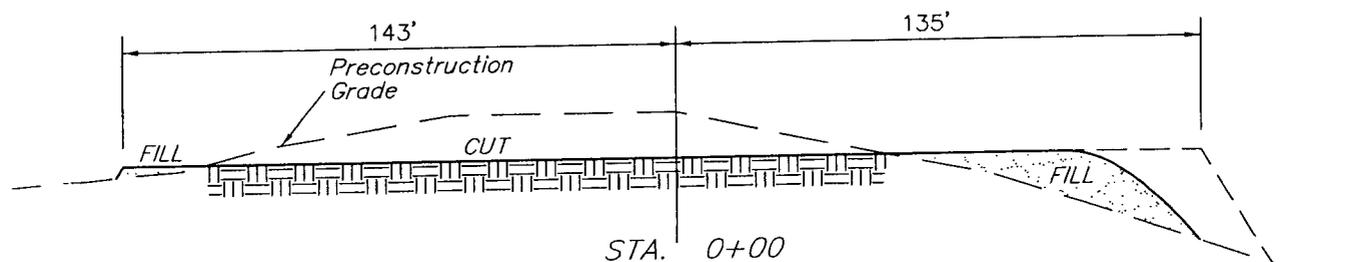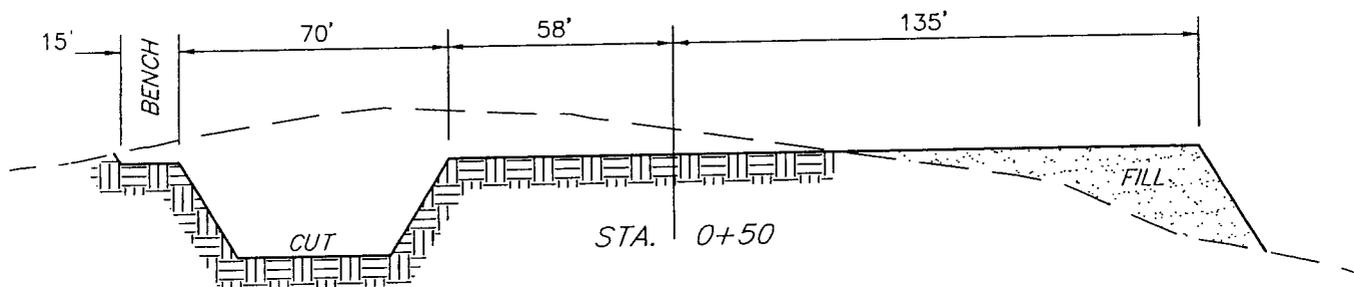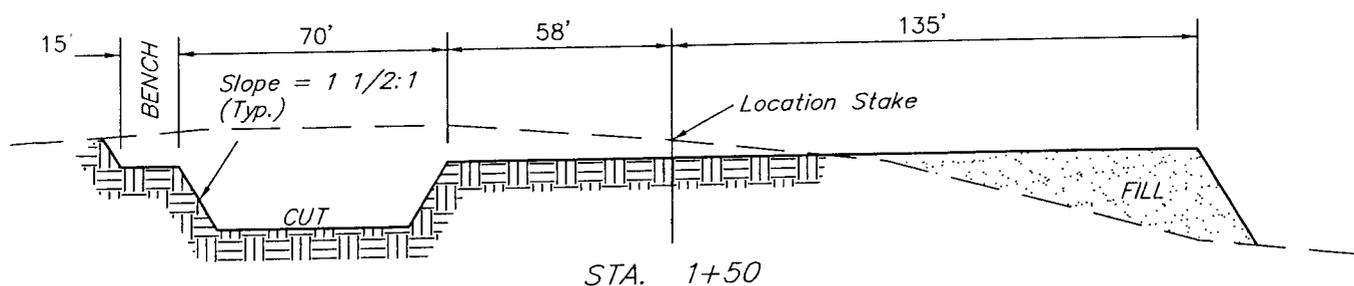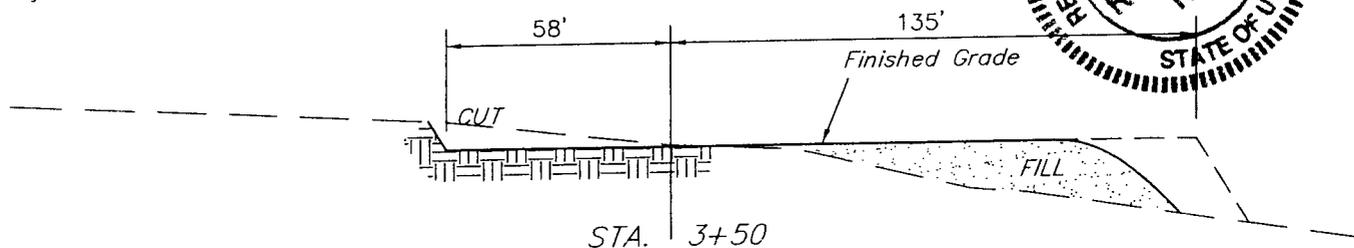

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,770 Cu. Yds.
Remaining Location	= 8,270 Cu. Yds.
<b>TOTAL CUT</b>	<b>= 10,040 CU.YDS.</b>
<b>FILL</b>	<b>= 6,880 CU.YDS.</b>

EXCESS MATERIAL	= 3,160 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,160 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	= 0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING  
85 So. 200 East \* Vernal, Utah 84078 \* (435) 789-1017

**WORKSHEET  
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 12/11/2006

API NO. ASSIGNED: 43-047-38925

WELL NAME: NBU 1022-15N

OPERATOR: KERR-MCGEE OIL & GAS ( N2995 )

CONTACT: SHEILA UPCHEGO

PHONE NUMBER: 435-781-7024

PROPOSED LOCATION:

SESW 15 100S 220E

SURFACE: 0673 FSL 1900 FWL

BOTTOM: 0673 FSL 1900 FWL

COUNTY: UINTAH

LATITUDE: 39.94348 LONGITUDE: -109.4278

UTM SURF EASTINGS: 634316 NORTHINGS: 4422457

FIELD NAME: NATURAL BUTTES ( 630 )

INSPECT LOCATN BY: / /		
<b>Tech Review</b>	<b>Initials</b>	<b>Date</b>
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-01198-B

SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: WSMVD

COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]  
(No. WY-2357 )
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit  
(No. 43-8496 )
- RDCC Review (Y/N)  
(Date: \_\_\_\_\_ )
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)

LOCATION AND SITING:

- R649-2-3.
- Unit: NATURAL BUTTES
- R649-3-2. General  
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit  
Board Cause No: 173-14  
Eff Date: 12-2-1994  
Siting: 460' by 460' & 920' between wells
- R649-3-11. Directional Drill

COMMENTS:

See Separate file

STIPULATIONS:

1- Federal Approval  
2- Oil Shale



OPERATOR: KERR MCGEE O&G (N2995)

SEC: 3,4,8,9,15 T.10S R. 22E

FIELD: NATURAL BUTTES (630)


COUNTY: UINTAH

CAUSE: 173-14 / 12-2-1999

- Field Status**
- ABANDONED
  - ACTIVE
  - COMBINED
  - INACTIVE
  - PROPOSED
  - STORAGE
  - TERMINATED

- Unit Status**
- EXPLORATORY
  - GAS STORAGE
  - NF PP OIL
  - NF SECONDARY
  - PENDING
  - PI OIL
  - PP GAS
  - PP GEOTHERML
  - PP OIL
  - SECONDARY
  - TERMINATED

- Wells Status**
- \* GAS INJECTION
  - \* GAS STORAGE
  - x LOCATION ABANDONED
  - o NEW LOCATION
  - x PLUGGED & ABANDONED
  - \* PRODUCING GAS
  - o PRODUCING OIL
  - \* SHUT-IN GAS
  - o SHUT-IN OIL
  - x TEMP. ABANDONED
  - o TEST WELL
  - o WATER INJECTION
  - o WATER SUPPLY
  - o WATER DISPOSAL
  - o DRILLING



Utah Oil Gas and Mining



PREPARED BY: DIANA MASON  
DATE: 13-DECEMBER-2006

# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, Utah 84145-0155

**IN REPLY REFER TO:**  
**3160**  
**(UT-922)**

December 14, 2006

**Memorandum**

**To:** Assistant District Manager Minerals, Vernal District  
**From:** Michael Coulthard, Petroleum Engineer  
**Subject:** 2006 Plan of Development Natural Buttes Unit Uintah County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2006 within the Natural Buttes Unit, Uintah County, Utah.

API #	WELL NAME	LOCATION
-------	-----------	----------

(Proposed PZ Wasatch/MesaVerde)

43-047-38917	NBU 1022-3E-1	Sec 03 T10S R22E 1406 FNL 1202 FWL
43-047-38918	NBU 1022-4H-3	Sec 04 T10S R22E 2426 FNL 1163 FEL
43-047-38919	NBU 1022-4H-2	Sec 04 T10S R22E 1383 FNL 1164 FEL
43-047-38920	NBU 1022-4E-3	Sec 04 T10S R22E 2171 FNL 0137 FWL
43-047-38922	NBU 1022-9A-4	Sec 09 T10S R22E 1253 FNL 0140 FEL
43-047-38923	NBU 1022-15M	Sec 15 T10S R22E 0469 FSL 0849 FWL
43-047-38925	NBU 1022-15N	Sec 15 T10S R22E 0673 FSL 1900 FWL

This office has no objection to permitting the wells at this time.

/s/ Michael L. Coulthard

**bcc:** File – Natural Buttes Unit  
Division of Oil Gas and Mining  
Central Files  
Agr. Sec. Chron  
Fluid Chron



State of Utah

Department of  
Natural Resources

MICHAEL R. STYLER  
*Executive Director*

Division of  
Oil, Gas & Mining

JOHN R. BAZA  
*Division Director*

JON M. HUNTSMAN, JR.  
*Governor*

GARY R. HERBERT  
*Lieutenant Governor*

December 14, 2006

Kerr-McGee Oil & Gas Onshore LP  
1368 S 1200 E  
Vernal, UT 84078

Re: Natural Buttes Unit 1022-15N Well, 673' FSL, 1900' FWL, SE SW, Sec. 15,  
T. 10 South, R. 22 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-38925.

Sincerely,

Gil Hunt  
Associate Director

pab  
Enclosures

cc: Uintah County Assessor (via e-mail)  
Bureau of Land Management, Vernal District Office

**Operator:** Kerr-McGee Oil & Gas Onshore LP  
**Well Name & Number** Natural Buttes Unit 1022-15N  
**API Number:** 43-047-38925  
**Lease:** UTU-01198-B

**Location:** SE SW                      **Sec.** 15                      **T.** 10 South                      **R.** 22 East

### **Conditions of Approval**

#### **1. General**

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

#### **2. Notification Requirements**

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

#### **3. Reporting Requirements**

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

5. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

5. Lease Serial No.  
**UTU-01198-D**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.  
**NATURAL BUTTES UNIT  
UNIT # 891008900A**

8. Well Name and No.  
**NBU 1022-15N**

9. API Well No.  
**43-047-38925**

10. Field and Pool, or Exploratory Area  
**NATURAL BUTTES**

11. County or Parish, State  
**UINTAH, UTAH**

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
**KERR-MCGEE OIL & GAS ONSHORE LP**

3a. Address -  
1999 BROADWAY, STE 3700, DENVER, CO 80202 Attention - Raleen White

3b. Phone No. (include area code)  
**720-929-6666**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**673' FSL, 1900' FWL  
SESW, SECTION 15, T10S, R22E SLB&M**

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <b>APD EXTENSION</b>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	<b>DOGM</b>
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

THE OPERATOR REQUESTS AUTHORIZATION FOR A ONE YEAR EXTENSION FOR THE SUBJECT WELL LOCATION. SO THE DRILLING OPERATIONS MAY BE COMPLETED. THE ORIGINAL APD WAS APPROVED BY THE DIVISION OF OIL, GAS AND MINING ON DECEMBER 14, 2006.

Approved by the  
Utah Division of  
Oil, Gas and Mining

**COPY SENT TO OPERATOR**  
Date: **12-17-07**  
Initials: **[Signature]**

Date: **12-17-07**  
By: **[Signature]**

**RECEIVED**  
**DEC 06 2007**  
DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) <b>RALEEN WHITE</b>	Title <b>SR. REGULATORY ANALYST</b>
Signature <b>Raleen White</b>	Date <b>December 4, 2007</b>

**THIS SPACE FOR FEDERAL OR STATE USE**

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RESET

**Application for Permit to Drill  
Request for Permit Extension  
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

**API:** 4304738925  
**Well Name:** NBU 1022-15N  
**Location:** SESW SECTION 15, T10S, R22E SLB&M  
**Company Permit Issued to:** KERR-MCGEE OIL & GAS ONSHORE LP  
**Date Original Permit Issued:** 12/14/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes  No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes  No


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes  No


Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes  No

Has the approved source of water for drilling changed? Yes  No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes  No

Is bonding still in place, which covers this proposed well? Yes  No

  
Signature

  
Date

Title: SR. REGULATORY ANALYST

Representing: KERR-MCGEE OIL & GAS ONSHORE LP

**RECEIVED**  
**DEC 06 2007**  
DIV. OF OIL, GAS & MINING

**RECEIVED**

FORM APPROVED  
OMB No. 1004-0136  
Expires November 30, 2000

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

DEC 04 2006

**BLM**

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. <b>UTU-01198-B</b>	
b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name	
2. Name of Operator <b>KERR McGEE OIL &amp; GAS ONSHORE LP</b>		7. If Unit or CA Agreement, Name and No. <b>UNIT #891008900A</b>	
3A. Address <b>1368 SOUTH 1200 EAST VERNAL, UT 84078</b>		8. Lease Name and Well No. <b>NBU 1022-15N</b>	
3b. Phone No. (include area code) <b>(435) 781-7024</b>		9. API Well No. <b>43 0A7 38925</b>	
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface <b>SESW 673'FSL, 1900'FWL</b> At proposed prod. Zone		10. Field and Pool, or Exploratory <b>NATURAL BUTTES</b>	
14. Distance in miles and direction from nearest town or post office* <b>35.6 MILES SOUTH OF VERNAL, UTAH</b>		11. Sec., T., R., M., or Blk, and Survey or Area <b>SEC. 15, T10S, R22E</b>	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) <b>673'</b>	16. No. of Acres in lease <b>2040.00</b>	17. Spacing Unit dedicated to this well <b>40.00</b>	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. <b>REFER TO TOPO C</b>	19. Proposed Depth <b>8400'</b>	20. BLM/BIA Bond No. on file <b>BOND NO. WY-2357- WYB000291</b>	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) <b>5225' UNGRADED GL</b>	22. Approximate date work will start*	23. Estimated duration	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- |   |   |
|---|---|
| 1. Well plat certified by a registered surveyor.  | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).   |
| 2. A Drilling Plan.   | 5. Operator certification.  |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized office. |

25. Signature 	Name (Printed/Typed) <b>SHEILA UPCHEGO</b>	Date <b>12/4/2006</b>
Title <b>SENIOR LAND ADMIN SPECIALIST</b>		
Approved by (Signature) 	Name (Printed/Typed) <b>Kelly Kendrick</b>	Date <b>6-24-2009</b>
Title <b>Assistant Field Manager Lands &amp; Mineral Resources</b>	Office <b>VERNAL FIELD OFFICE</b>	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

**CONDITIONS OF APPROVAL ATTACHED**

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on reverse)

**NOTICE OF APPROVAL**

**RECEIVED**

**JUN 26 2008**

**DIV. OF OIL, GAS & MINING**

**UDOGH**

06 Bm 1783A

NOS 5/31/06



**UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
VERNAL FIELD OFFICE**

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



**CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL**

<b>Company:</b>	<b>Kerr-McGee Oil &amp; Gas Onshore, LP</b>	<b>Location:</b>	<b>SESW, Sec. 15, T10S, R22E</b>
<b>Well No:</b>	<b>NBU 1022-15N</b>	<b>Lease No:</b>	<b>UTU-01198-B</b>
<b>API No:</b>	<b>43-047-38925</b>	<b>Agreement:</b>	<b>Natural Buttes Unit</b>

<b>Title</b>	<b>Name</b>	<b>Office Phone Number</b>	<b>Cell Phone Number</b>
Petroleum Engineer:	Matt Baker	(435) 781-4490	(435) 828-4470
Petroleum Engineer:	Michael Lee	(435) 781-4432	(435) 828-7875
Petroleum Engineer:	James Ashley	(435) 781-4470	(435) 828-7874
Petroleum Engineer:	Ryan Angus	(435) 781-4430	(435) 828-7368
Supervisory Petroleum Technician:	Jamie Sparger	(435) 781-4502	(435) 828-3913
Supervisory NRS:	Karl Wright	(435) 781-4484	(435) 828-7381
NRS/Enviro Scientist:	Holly Villa	(435) 781-4404	(435) 828-3544
NRS/Enviro Scientist:	James Hereford	(435) 781-3412	
NRS/Enviro Scientist:	Chuck Macdonald	(435) 781-4441	(435) 828-7481
NRS/Enviro Scientist:	Dan Emmett	(435) 781-3414	
NRS/Enviro Scientist:	Paul Percival	(435) 781-4493	
NRS/Enviro Scientist:	Michael Cutler	(435) 781-3401	(435) 828-3546
NRS/Enviro Scientist:	Anna Figueroa	(435) 781-3407	(435) 828-3548
NRS/Enviro Scientist:	Verlyn Pindell	(435) 781-3402	(435) 828-3547
NRS/Enviro Scientist:	Darren Williams	(435) 781-4447	(435) 828-4029
NRS/Enviro Scientist:	Nathan Packer	(435) 781-3405	(435) 828-3545

**Fax: (435) 781-3420**

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR  
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

**NOTIFICATION REQUIREMENTS**

Location Construction (Notify Environmental Scientist)	-	Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	-	Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	-	Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to running casing and cementing all casing strings.
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	-	Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM  
CONDITIONS OF APPROVAL (COAs)***

***Surface COAs:***

- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

***Site Specific COAs:***

- The topsoil from the reserve pit shall be stripped and piled separately near the reserve pit. When the reserve pit is closed, it shall be re-contoured and the topsoil re-spread, and the area shall be seeded in the same manner as the location topsoil.
- Once the location is plugged and abandoned, it shall be re-contoured to natural contours, topsoil re-spread where appropriate, and the entire location seeded with the recommended seed mix. Seeding shall take place by broadcasting the seed and walking it into the soil with a dozer immediately after the dirt work is completed.
- The lessee/operator is given notice that lands in the lease have been identified as containing Golden eagle nesting habitat. It is requested that the lessee/operator not initiate surface disturbing activities or drilling from February 2<sup>nd</sup> through July 15<sup>th</sup>. A survey may be conducted by a qualified biologist or a BLM representative during this timing period to determine if golden eagles are in the area .
- The lessee/operator is given notice that lands in the lease have been identified as containing Golden Eagle nesting habitat. It is requested that the lessee/operator not initiate surface disturbing activities or drilling from February 1<sup>st</sup> through July 15<sup>th</sup>. A survey may be conducted by a qualified biologist or a BLM representative during this timing period to determine if golden eagles are in the area .

## ***DOWNHOLE CONDITIONS OF APPROVAL ( COAs)***

### **SITE SPECIFIC DOWNHOLE COAs:**

- Electronic/mechanical mud monitoring equipment shall be required, from surface casing shoe to TD, which shall include as a minimum: pit volume totalizer (PVT); stroke counter; and flow sensor.
- A formation integrity test shall be performed at the surface casing shoe.
- The top of the production casing cement shall extend a minimum of 200 feet above the surface casing shoe.

**All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to.** The following items are emphasized:

### **DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS**

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**

- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- Chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT\_VN\_Wellogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

## **OPERATING REQUIREMENT REMINDERS:**

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
  - Operator name, address, and telephone number.
  - Well name and number.
  - Well location ( $\frac{1}{4}$  $\frac{1}{4}$ , Sec., Twn, Rng, and P.M.).
  - Date well was placed in a producing status (date of first production for which royalty will be paid).
  - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
  - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
  - Unit agreement and/or participating area name and number, if applicable.
  - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.

- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.
- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.

- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: <b>UTU-01198B</b>
2. NAME OF OPERATOR: <b>Kerr-McGee Oil &amp; Gas Onshore, LP</b>		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: <b>N/A</b>
3. ADDRESS OF OPERATOR: P.O. Box 173779 CITY <b>Denver</b> STATE <b>CO</b> ZIP <b>80217-3779</b>		7. UNIT or CA AGREEMENT NAME: <b>891008900A</b>
4. LOCATION OF WELL FOOTAGES AT SURFACE: <b>673' FSL &amp; 1900' FWL</b>		8. WELL NAME and NUMBER: <b>NBU 1022-15N</b>
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: <b>SESW 15 10S 22E</b>		9. API NUMBER: <b>4304738925</b>
COUNTY: <b>Uintah</b>		10. FIELD AND POOL, OR WILDCAT: <b>Natural Buttes Field</b>
STATE: <b>UTAH</b>		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u><b>APD Extension</b></u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Kerr-McGee Oil & Gas Onshore, LP, respectfully requests a one year extension for this APD in order to complete drilling operations. The Utah Division of Oil, Gas, and Mining initially approved this APD on 12/14/2006.

Approved by the  
Utah Division of  
Oil, Gas and Mining

Date: 12-22-08  
By: [Signature]

NAME (PLEASE PRINT) <u>Kevin McIntyre</u>	TITLE <u>Regulatory Analyst</u>
SIGNATURE <u>[Signature]</u>	DATE <u>12/16/2008</u>

(This space for State use only)

COPY SENT TO OPERATOR

Date: 12.30.2008

Initials: KS

(See Instructions on Reverse Side)

**RECEIVED**

**DEC 17 2008**

DIV. OF OIL, GAS & MINING



**Application for Permit to Drill  
Request for Permit Extension  
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

**API:** 4304738925  
**Well Name:** NBU 1022-15N  
**Location:** SESW 673' FSL & 1900' FWL, Sec. 15, T10S R22E  
**Company Permit Issued to:** Kerr-McGee Oil & Gas Onshore, LP  
**Date Original Permit Issued:** 12/14/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes  No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes  No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes  No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes  No

Has the approved source of water for drilling changed? Yes  No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes  No

Is bonding still in place, which covers this proposed well? Yes  No

  
\_\_\_\_\_  
Signature

12/16/2008  
\_\_\_\_\_  
Date

Title: Regulatory Analyst

Representing: Kerr-McGee Oil & Gas Onshore, LP

**RECEIVED**  
**DEC 17 2008**  
**DIV. OF OIL, GAS & MINING**

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>  <b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU-01198-B
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7. UNIT or CA AGREEMENT NAME:</b> NATURAL BUTTES
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> NBU 1022-15N
<b>2. NAME OF OPERATOR:</b> KERR-MCGEE OIL & GAS ONSHORE, L.P.	<b>9. API NUMBER:</b> 43047389250000
<b>3. ADDRESS OF OPERATOR:</b> P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	<b>PHONE NUMBER:</b> 720 929-6007 Ext
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 0673 FSL 1900 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SESW Section: 15 Township: 10.0S Range: 22.0E Meridian: S	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES  <b>COUNTY:</b> UINTAH  <b>STATE:</b> UTAH

**11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 12/22/2009	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: _____

**12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.**

Kerr-McGee Oil & Gas Onshore, L.P. (Kerr-McGee) respectfully requests an extension to this APD for the maximum time allowed. Please contact the undersigned with any questions and/or comments. Thank you.

**Approved by the Utah Division of Oil, Gas and Mining**

**Date:** December 21, 2009

**By:**

<b>NAME (PLEASE PRINT)</b> Danielle Piernot	<b>PHONE NUMBER</b> 720 929-6156	<b>TITLE</b> Regulatory Analyst
<b>SIGNATURE</b> N/A		<b>DATE</b> 12/17/2009



**The Utah Division of Oil, Gas, and Mining**

- State of Utah  
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

**Request for Permit Extension Validation Well Number 43047389250000**

**API:** 43047389250000

**Well Name:** NBU 1022-15N

**Location:** 0673 FSL 1900 FWL QTR SESW SEC 15 TWNP 100S RNG 220E MER S

**Company Permit Issued to:** KERR-MCGEE OIL & GAS ONSHORE, L.P.

**Date Original Permit Issued:** 12/14/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated?  Yes  No
  
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location?  Yes  No
  
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well?  Yes  No
  
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location?  Yes  No
  
- Has the approved source of water for drilling changed?  Yes  No
  
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation?  Yes  No
  
- Is bonding still in place, which covers this proposed well?  Yes  No


**Approved by the  
Utah Division of  
Oil, Gas and Mining**

**Signature:** Danielle Piernot

**Date:** 12/17/2009

**Title:** Regulatory Analyst **Representing:** KERR-MCGEE OIL & GAS ONSHORE, L.P.

**Date:** December 21, 2009

**By:** 

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>  <b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU-01198-B
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7. UNIT or CA AGREEMENT NAME:</b> NATURAL BUTTES
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> NBU 1022-15N
<b>2. NAME OF OPERATOR:</b> KERR-MCGEE OIL & GAS ONSHORE, L.P.	<b>9. API NUMBER:</b> 43047389250000
<b>3. ADDRESS OF OPERATOR:</b> P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	<b>PHONE NUMBER:</b> 720 929-6007 Ext
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 0673 FSL 1900 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SESW Section: 15 Township: 10.0S Range: 22.0E Meridian: S	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES  <b>COUNTY:</b> UINTAH  <b>STATE:</b> UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 12/14/2010  <input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:  <input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:  <input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Kerr-McGee Oil & Gas Onshore, L.P. (Kerr-McGee) respectfully requests an extension to this APD for the maximum time allowed. Please contact the undersigned with any questions and/or comments. Thank you.

**Approved by the  
Utah Division of  
Oil, Gas and Mining**

Date: 12/23/2010  
 By: 

<b>NAME (PLEASE PRINT)</b> Danielle Piernot	<b>PHONE NUMBER</b> 720 929-6156	<b>TITLE</b> Regulatory Analyst
<b>SIGNATURE</b> N/A		<b>DATE</b> 12/14/2010



**The Utah Division of Oil, Gas, and Mining**

- State of Utah  
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

**Request for Permit Extension Validation Well Number 43047389250000**

**API:** 43047389250000

**Well Name:** NBU 1022-15N

**Location:** 0673 FSL 1900 FWL QTR SESW SEC 15 TWNP 100S RNG 220E MER S

**Company Permit Issued to:** KERR-MCGEE OIL & GAS ONSHORE, L.P.

**Date Original Permit Issued:** 12/14/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated?  Yes  No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location?  Yes  No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well?  Yes  No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location?  Yes  No
- Has the approved source of water for drilling changed?  Yes  No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation?  Yes  No
- Is bonding still in place, which covers this proposed well?  Yes  No

**Approved by the  
Utah Division of  
Oil, Gas and Mining**

**Signature:** Danielle Piernot

**Date:** 12/14/2010

**Title:** Regulatory Analyst **Representing:** KERR-MCGEE OIL & GAS ONSHORE,

**Date:** 12/23/2010  
**By:** 

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>  <b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU-01198-B
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7. UNIT or CA AGREEMENT NAME:</b> NATURAL BUTTES
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> NBU 1022-15N
<b>2. NAME OF OPERATOR:</b> KERR-MCGEE OIL & GAS ONSHORE, L.P.	<b>9. API NUMBER:</b> 43047389250000
<b>3. ADDRESS OF OPERATOR:</b> P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	<b>PHONE NUMBER:</b> 720 929-6515 Ext
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 0673 FSL 1900 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SESW Section: 15 Township: 10.0S Range: 22.0E Meridian: S	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES  <b>COUNTY:</b> UINTAH  <b>STATE:</b> UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 12/14/2011  <input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:  <input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:  <input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 50px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Kerr-McGee Oil & Gas Onshore, L.P. (Kerr-McGee) respectfully requests an extension to this APD for the maximum time allowed. Please contact the undersigned with any questions and/or comments. Thank you.

**Approved by the Utah Division of Oil, Gas and Mining**

**Date:** 11/30/2011

**By:**

<b>NAME (PLEASE PRINT)</b> Danielle Piernot	<b>PHONE NUMBER</b> 720 929-6156	<b>TITLE</b> Regulatory Analyst
<b>SIGNATURE</b> N/A	<b>DATE</b> 11/29/2011	



**The Utah Division of Oil, Gas, and Mining**

- State of Utah  
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

**Request for Permit Extension Validation Well Number 43047389250000**

**API:** 43047389250000

**Well Name:** NBU 1022-15N

**Location:** 0673 FSL 1900 FWL QTR SESW SEC 15 TWNP 100S RNG 220E MER S

**Company Permit Issued to:** KERR-MCGEE OIL & GAS ONSHORE, L.P.

**Date Original Permit Issued:** 12/14/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated?  Yes  No
  
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location?  Yes  No
  
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well?  Yes  No
  
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location?  Yes  No
  
- Has the approved source of water for drilling changed?  Yes  No
  
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation?  Yes  No
  
- Is bonding still in place, which covers this proposed well?  Yes  No

**Signature:** Danielle Piernot

**Date:** 11/29/2011

**Title:** Regulatory Analyst **Representing:** KERR-MCGEE OIL & GAS ONSHORE, L.P.



# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Green River District-Vernal Field Office

170 South 500 East

Vernal, UT 84078

(435) 781-4400 Fax: (435) 781-4410

<http://www.blm.gov/ut/st/en/fo/vernal.html>



**APR 13 2012**

IN REPLY REFER TO:  
3160 (UTG011)

Julie Jacobson  
Anadarko Petroleum Corporation  
Kerr McGee Oil & Gas Onshore LP  
1099 18<sup>th</sup> Street, Suite 600  
Denver, CO 80202

43 047 38925

Re: Notice of Expiration  
Well No. NBU 1022-15N  
SESW, Sec. 15, T10S, R22E  
Uintah County, Utah  
Lease No. UTU-01198-B  
Natural Buttes Unit

Dear Ms. Jacobson:

The Application for Permit to Drill (APD) for the above-referenced well was approved on June 24, 2008. No extension request of the original APD was received. According to our records, no known activity has transpired at the approved location. In view of the foregoing, this office is notifying you that the approval of the referenced application has expired. If you intend to drill at this location in the future, a new Application for Permit to Drill must be submitted.

This office requires a letter confirming that no surface disturbance has been made for this drill site. Any surface disturbance associated with the approved location of this well is to be rehabilitated. A schedule for this rehabilitation must be submitted to this office. Your cooperation in this matter is appreciated.

If you have any questions regarding this matter, please contact Cindy Severson at (435) 781-4455.

Sincerely,

Jerry Kenczka  
Assistant Field Manager  
Lands & Mineral Resources

cc: UDOGM

**RECEIVED**

**MAY 02 2012**

**DIV OF OIL, GAS, & MINING**



GARY R. HERBERT  
Governor

GREG BELL  
Lieutenant Governor

# State of Utah

## DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER  
Executive Director

### Division of Oil, Gas and Mining

JOHN R. BAZA  
Division Director

June 14, 2012

Jenn Hawkins  
Anadarko Petroleum Corporation  
1099 18<sup>th</sup> Street, Ste. 1800  
Denver, CO 80202

43 047 38925  
NBU 1022-15N  
10S 22E 15

Re: APDs Rescinded for Anadarko Petroleum Corporation  
Uintah County

Dear Ms. Hawkins:

Enclosed find the list of APDs that you requested to be rescinded. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded, effective June 5, 2012.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

  
Diana Mason  
Environmental Scientist

cc: Well File  
Bureau of Land Management, Vernal



43-047-39314	NBU 612-23E
43-047-39317	NBU 610-23E
43-047-39318	NBU 609-23E
43-047-38173	FEDERAL 1021-24O
43-047-40121	HATCH 923-14K
43-047-40122	HATCH 923-24C
43-047-40123	HATCH 923-24E
43-047-38315	BONANZA 1023-15G
43-047-39418	NBU 441-12E
43-047-50519	HATCH 923-14M
43-047-37031	BONANZA 1023-14E
43-047-38746	LOVE 1121-8B
43-047-39797	NBU 606-35E
43-047-39855	NBU 659-01E
43-047-39857	NBU 440-01E
43-047-39859	NBU 652-06E
→ 43-047-38925	NBU 1022-15N
<del>43-047-39868</del>	<del>NBU 656-01E</del>