

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT
(highlight changes)

APPLICATION FOR PERMIT TO DRILL				5. MINERAL LEASE NO: ML-21330	6. SURFACE: State
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>				7. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>				8. UNIT or CA AGREEMENT NAME: UNIT #891008900A	
2. NAME OF OPERATOR: KERR MCGEE OIL & GAS ONSHORE L.P.				9. WELL NAME and NUMBER: NBU 1021-29C	
3. ADDRESS OF OPERATOR: 1368 S 1200 E CITY VERNAL STATE UT ZIP 84078			PHONE NUMBER: (435) 781-7024	10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES	
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 476'FNL, 2501'FWL AT PROPOSED PRODUCING ZONE:				11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NENW 29 10S 21E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 19 MILES SOUTH OF OURAY, UTAH				12. COUNTY: UINTAH	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 476'	16. NUMBER OF ACRES IN LEASE: 640.00		17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 40.00		
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) REFER TO TOPO C	19. PROPOSED DEPTH: 9,300		20. BOND DESCRIPTION: RLB0005237		
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 5193'GL	22. APPROXIMATE DATE WORK WILL START:		23. ESTIMATED DURATION:		

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT			SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT		
12 1/4"	9 5/8	H-40	32.3#	2,000	265 SX CLASS G	1.18 YIELD	15.6 PPG
7 7/8"	4 1/2	I-80	11.6#	9,300	1970 SX 50/50 POZ	1.31 YIELD	14.3 PPG

ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:

- | | |
|--|--|
| <input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER | <input checked="" type="checkbox"/> COMPLETE DRILLING PLAN |
| <input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER | <input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER |

NAME (PLEASE PRINT) SHEILA UPCHEGO TITLE SENIOR LAND ADMIN SPECIALIST
SIGNATURE *[Signature]* DATE 1/23/2007

(This space for State use only)

**Approved by the
Utah Division of
Oil, Gas and Mining**

API NUMBER ASSIGNED: 43-047-39018

APPROVAL:

Date: 05-23-07
By: *[Signature]*

**RECEIVED
FEB 02 2007
DIV. OF OIL, GAS & MINING**


T10S, R21E, S.L.B.&M.

Set Marked
Stones

1977 Brass Cap
0.8' High, Pile of
Stones


Kerr-McGee Oil & Gas Onshore LP

Well location, NBU #1021-29C, located as shown in the NE 1/4 NW 1/4 of Section 29, T10S, R21E, S.L.B.&M., Uintah County, Utah.

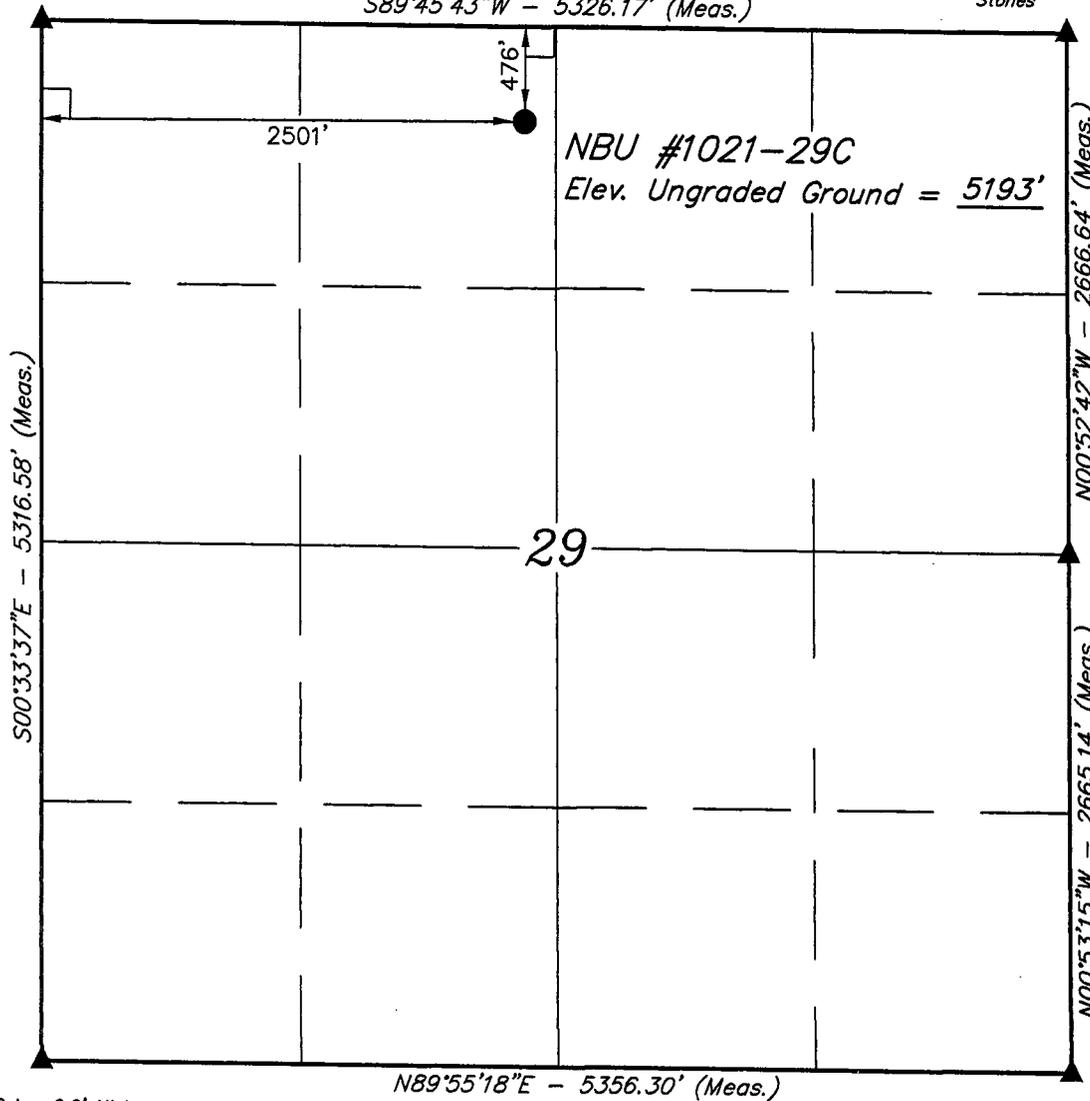


BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

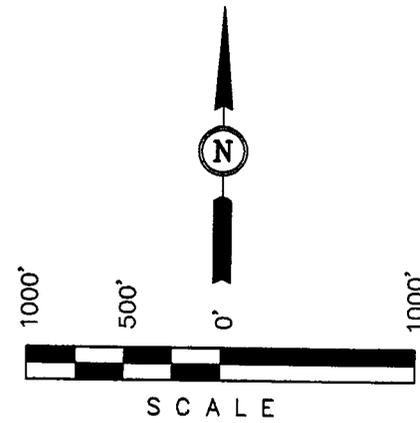

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



1977 Brass Cap
0.6' High, Pile of
Stones

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

(NAD 83)
 LATITUDE = $39^{\circ}55'28.44''$ (39.924567)
 LONGITUDE = $109^{\circ}34'34.52''$ (109.576256)
 (NAD 27)
 LATITUDE = $39^{\circ}55'28.56''$ (39.924600)
 LONGITUDE = $109^{\circ}34'32.04''$ (109.575567)

LEGEND:

- = 90° SYMBOL
- = PROPOSED WELL HEAD.
- = SECTION CORNERS LOCATED.

UNTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 11-17-06	DATE DRAWN: 11-21-06
PARTY L.K. J.M. C.H.	REFERENCES G.L.O. PLAT	
WEATHER COOL	FILE Kerr-McGee Oil & Gas Onshore LP	

NBU 1021-29C
NE/NW SEC. 29, T10S, R21E
UINTAH COUNTY, UTAH
ML-21330

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. Estimated Tops of Important Geologic Markers:

<u>Formation</u>	<u>Depth</u>
Uinta	0- Surface
Green River	1027'
Top of Birds Nest Water	1255'
Mahogany	1819'
Wasatch	4226'
Mesaverde	7152'
MVU2	8104'
MVL1	8626'
TD	9300'

2. Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
Water	Green River	1027'
	Top of Birds Nest Water	1255'
	Mahogany	1819'
Gas	Wasatch	4226'
Gas	Mesaverde	7152'
Gas	MVU2	8104'
Gas	MVL1	8626'
Water	N/A	
Other Minerals	N/A	

3. Pressure Control Equipment (Schematic Attached)

Please refer to the attached Drilling Program.

4. Proposed Casing & Cementing Program:

Please refer to the attached Drilling Program.

5. Drilling Fluids Program:

Please refer to the attached Drilling Program.

6. Evaluation Program:

Please refer to the attached Drilling Program.

7. **Abnormal Conditions:**

Maximum anticipated bottomhole pressure calculated at 9300' TD, approximately equals 5766 psi (calculated at 0.62 psi/foot).

Maximum anticipated surface pressure equals approximately 3720 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. **Anticipated Starting Dates:**

Drilling is planned to commence immediately upon approval of this application.

9. **Variations:**

Please refer to the attached Drilling Program.

10. **Other Information:**

Please refer to the attached Drilling Program.



KERR-McGEE OIL & GAS ONSHORE LP DRILLING PROGRAM

COMPANY NAME KERR-McGEE OIL & GAS ONSHORE LP DATE January 23, 2007
 WELL NAME NBU 1021-29C TD 9,300' MD/TVD _____
 FIELD Natural Buttes COUNTY Uintah STATE Utah ELEVATION 5,193' GL KB 5,208'
 SURFACE LOCATION NE/NW SEC. 29, T10S, R21E 476'FNL, 2501'FWL BHL Straight Hole
 Latitude: 39.924567 Longitude: 109.576256
 OBJECTIVE ZONE(S) Wasatch/Mesaverde
 ADDITIONAL INFO Regulatory Agencies: UDOGM (SURF & MINERALS), BLM, Tri-County Health Dept.

GEOLOGICAL			MECHANICAL		
LOGS	FORMATION TOPS	DEPTH	HOLE SIZE	CASING SIZE	MUD WEIGHT
		40'		14"	
			12-1/4"	9-5/8", 32.3#, H-40, STC	Air mist
<p>Catch water sample, if possible, from 0 to 4,226'</p> <p style="margin-left: 40px;">Green River @ 1,027'</p> <p style="margin-left: 40px;">Top of Birds Nest Water @ 1255'</p> <p style="margin-left: 40px;">Mahogany @ 1,819'</p> <p style="margin-left: 40px;">Preset f/ GL @ 1,900' MD</p> <p>Note: 12.25" surface hole will usually be drilled ±400' below the bottom of lost circulation zone. Drilled depth may be ±200' of the estimated set depth depending on the actual depth of the loss zone.</p> <p>Mud logging program TBD</p> <p>Open hole logging program f/ TD - surf csg</p>					
	Wasatch @	4,226'	7-7/8"	4-1/2", 11.6#, I-80 or equivalent LTC casing	Water/Fresh Water Mud 8.3-11.5 ppg
	Mverde @	7,152'			
	MVU2 @	8,104'			
	MVL1 @	8,626'			
	TD @	9,300'			Max anticipated Mud required 11.5 ppg



KERR-McGEE OIL & GAS ONSHORE LP
DRILLING PROGRAM

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'				2270	1370	254000
SURFACE	9-5/8"	0 to 1900	32.30	H-40	STC	0.65*****	1.54	4.73
PRODUCTION	4-1/2"	0 to 9300	11.60	I-80	LTC	7780	6350	201000
						2.21	1.14	2.13

- 1) Max Anticipated Surf. Press.(MASP) (Surface Casing) = (Pore Pressure at next csg point-(0.22 psi/ft-partial evac gradient x TVD of next csg point)
 2) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft-partial evac gradient x TD)
 (Burst Assumptions: TD = 11.5 ppg) .22 psi/ft = gradient for partially evac wellbore
 (Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)
 MASP 3515 psi

***** Burst SF is low but csg is much stronger than formation at 2000'. EMW @ 2000' for 2270# is 21.8 ppg or 1.13 psi/ft

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	LEAD	500	Premium cmt + 2% CaCl + .25 pps flocele	215	60%	15.60	1.18
Option 1	TOP OUT CMT (1)	200	20 gals sodium silicate + Premium cmt + 2% CaCl + .25 pps flocele	50		15.60	1.18
	TOP OUT CMT (2)	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
SURFACE		NOTE: If well will circulate water to surface, option 2 will be utilized					
Option 2	LEAD	1500	Prem cmt + 16% Gel + 10 pps gilsonite +.25 pps Flocele + 3% salt BWOC	170	35%	11.00	3.82
	TAIL	500	Premium cmt + 2% CaCl + .25 pps flocele	180	35%	15.60	1.18
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
PRODUCTION	LEAD	3,720'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	410	60%	11.00	3.38
	TAIL	5,580'	50/50 Poz/G + 10% salt + 2% gel +.1% R-3	1560	60%	14.30	1.31

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained
 *Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS



SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.
 BOPE: 11" 5M with one annular and 2 rams. Test to 5,000 psi (annular to 2,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.
 Drop Totco surveys every 2000'. Maximum allowable hole angle is 5 degrees.
 Most rigs have PVT Systems for mud monitoring. If no PVT is available, visual monitoring will be utilized.

DRILLING ENGINEER: _____ DATE: _____
 Brad Laney
 DRILLING SUPERINTENDENT: _____ DATE: _____
 Randy Bayne
 NBU1021-29C DHD.xls

5M BOP STACK and CHOKE MANIFOLD SYSTEM

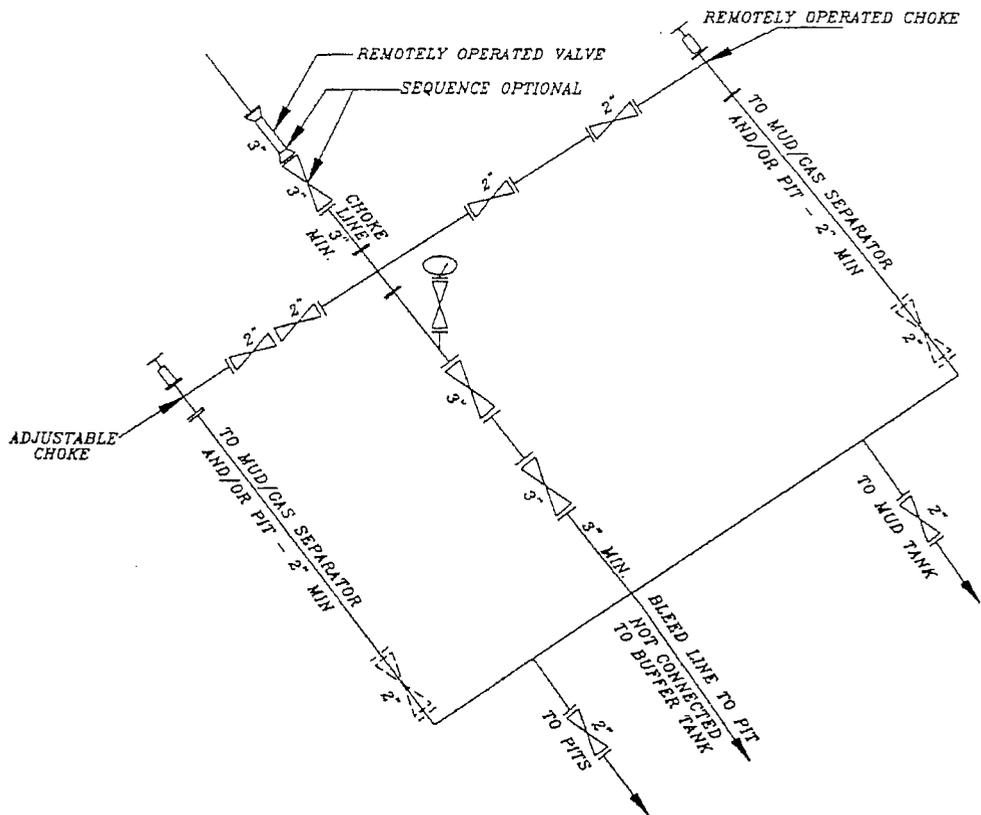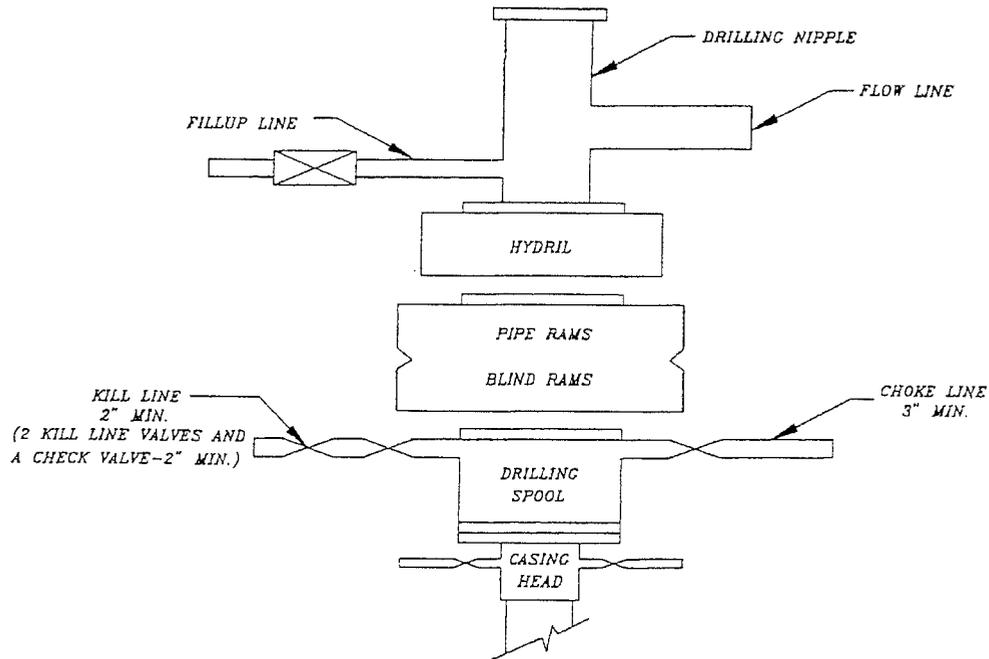

NBU 1021-29C
NE/NW SEC. 29, T10S, R21E
Uintah County, UT
ML-21330

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. **Existing Roads:**

Refer to Topo Map A for directions to the location.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

Refer to Topo Maps A and B for location of access roads within a 2 mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

2. **Planned Access Roads:**

Approximately 0.2 +/- miles of new access road is proposed. Refer to Topo Map B for the location of the proposed access road.

The upgraded and new portions of the access road will be crowned and ditched with a running surface of 18 feet and a maximum disturbed width of 30 feet. Appropriate water control will be installed to control erosion.

Existence of pipelines; maximum grade; turnouts; major cut and fills, culverts, or bridges; gates, cattle guards, fence cuts, or modifications to existing facilities were determined at the on-site.

The access road was centerline flagged during time of staking.

Surfacing material may be necessary, depending upon weather conditions.

Surface disturbance and vehicular traffic will be limited to the approved location and approved access route. Any additional area needed will be approved in advance.

3. **Location of Existing Wells Within a 1-Mile Radius:**

Please refer to Topo Map C.

4. **Location of Existing & Proposed Facilities:**

The following guidelines will apply if the well is productive.

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain

fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The required color is Carlsbad Canyon, standard color number 2.5Y 6/2.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

Approximately 2000' +/- of 4" pipeline is proposed from the location to a tie-in point. Refer to Topo Map D.

5. Location and Type of Water Supply:

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec. 32, T4S, R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

6. Source of Construction Materials:

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

7. Methods of Handling Waste Materials:

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge of liquids.

A plastic reinforced liner and felt will be used, it will be a minimum of 20 mil thick, with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec. 35, T9S, R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E.

8. Ancillary Facilities:

None are anticipated.

9. Well Site Layout: (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

The reserve pit will be lined, and when the reserve pit is closed, the pit liner will be buried below plow depth.

All pits will be fenced according to the following minimum standards:

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

The net wire shall be no more than two inches above the ground. The barbed wire shall be three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance

between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Location size may change prior to the drilling of the well due to current rig availability. If the proposed location is not large enough to accommodate the drilling rig the location will be re-surveyed and a Form 9 shall be submitted.

10. **Plans for Reclamation of the Surface:**

Producing Location:

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

A plastic, nylon reinforced liner will be used, it shall be torn and perforated before backfilling of the reserve pit.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water (s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling, and recontouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

Dry Hole/Abandoned Location:

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations.

11. Surface Ownership:

SITLA
675 East 500 South, Suite 500
Salt Lake City, UT 84102

12. Other Information:

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance.

The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

A Class III archaeological survey will be submitted when report becomes available.

This location is not within 460' from the boundary of the Natural Buttes Unit, nor is it within 460' of any non-committed tract lying within the boundaries of the Unit.

13. Lessee's or Operators's Representative & Certification:

Sheila Upchego
Senior Land Admin Specialist
Kerr-McGee Oil & Gas Onshore LP
1368 South 1200 East.
Vernal, UT 84078
(435) 781-7024

Randy Bayne
Drilling Manager
Kerr-McGee Oil & Gas Onshore LP
1368 South 1200 East
Vernal, UT 84078
(435)781-7018

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Kerr-McGee Oil & Gas Onshore LP is considered to be the operator of the subject well. Kerr-McGee Oil & Gas Onshore LP agrees to be responsible under terms and conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by State Surety Bond #RLB0005237.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.



Sheila Upchego

1/23/2007

Date

Kerr-McGee Oil & Gas Onshore LP

NBU #1021-29C

SECTION 29, T10S, R21E, S.L.B.&M.


PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; TURN LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 15.6 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 1.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTH; TURN LEFT AND PROCEED IN A NORTHERLY, THEN NORTHEASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 1.6 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTH; TURN LEFT AND PROCEED IN A NORTHERLY, THEN NORTHWESTERLY DIRECTION APPROXIMATELY 0.3 MILES TO THE EXISTING #359 AND THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTHWEST; FOLLOW ROAD FLAGS IN A NORTHWESTERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 50.0 MILES.

Kerr-McGee Oil & Gas Onshore LP

NBU #1021-29C

LOCATED IN UINTAH COUNTY, UTAH
SECTION 29, T10S, R21E, S.L.B.&M.

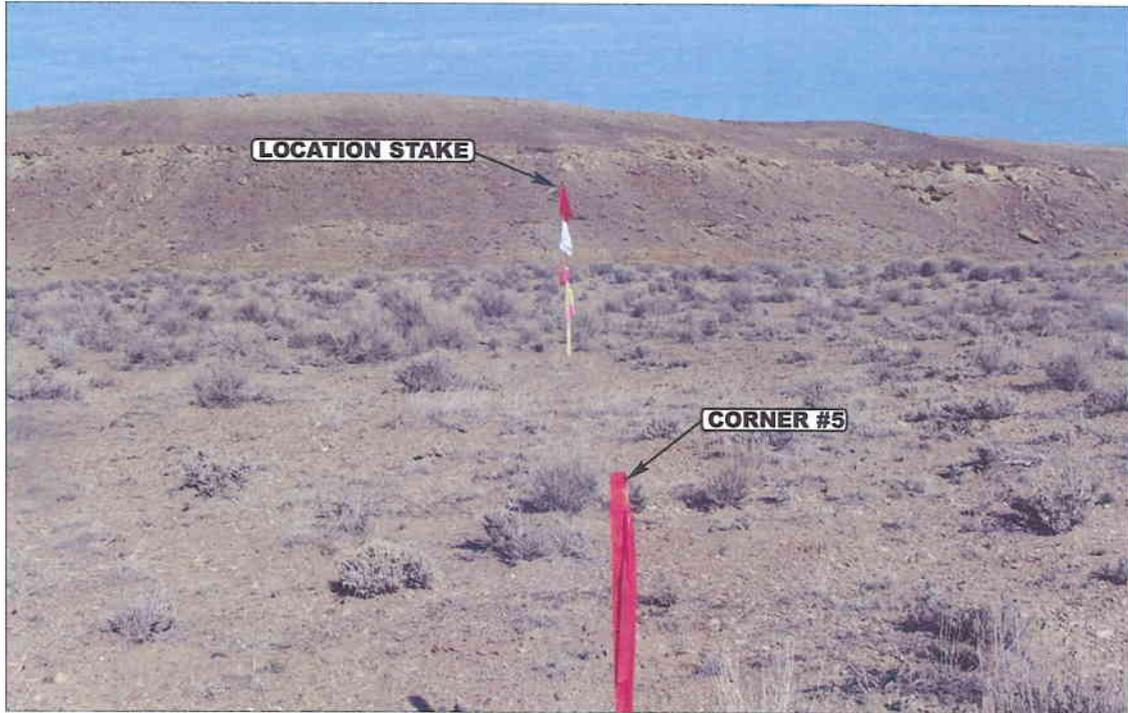

LOCATION STAKE

CORNER #5

PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY



PROPOSED ACCESS

PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHWESTERLY



- Since 1964 -

UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS


11 21 06
MONTH DAY YEAR

PHOTO

TAKEN BY: M.A.

DRAWN BY: L.K.

REVISED: 00-00-00

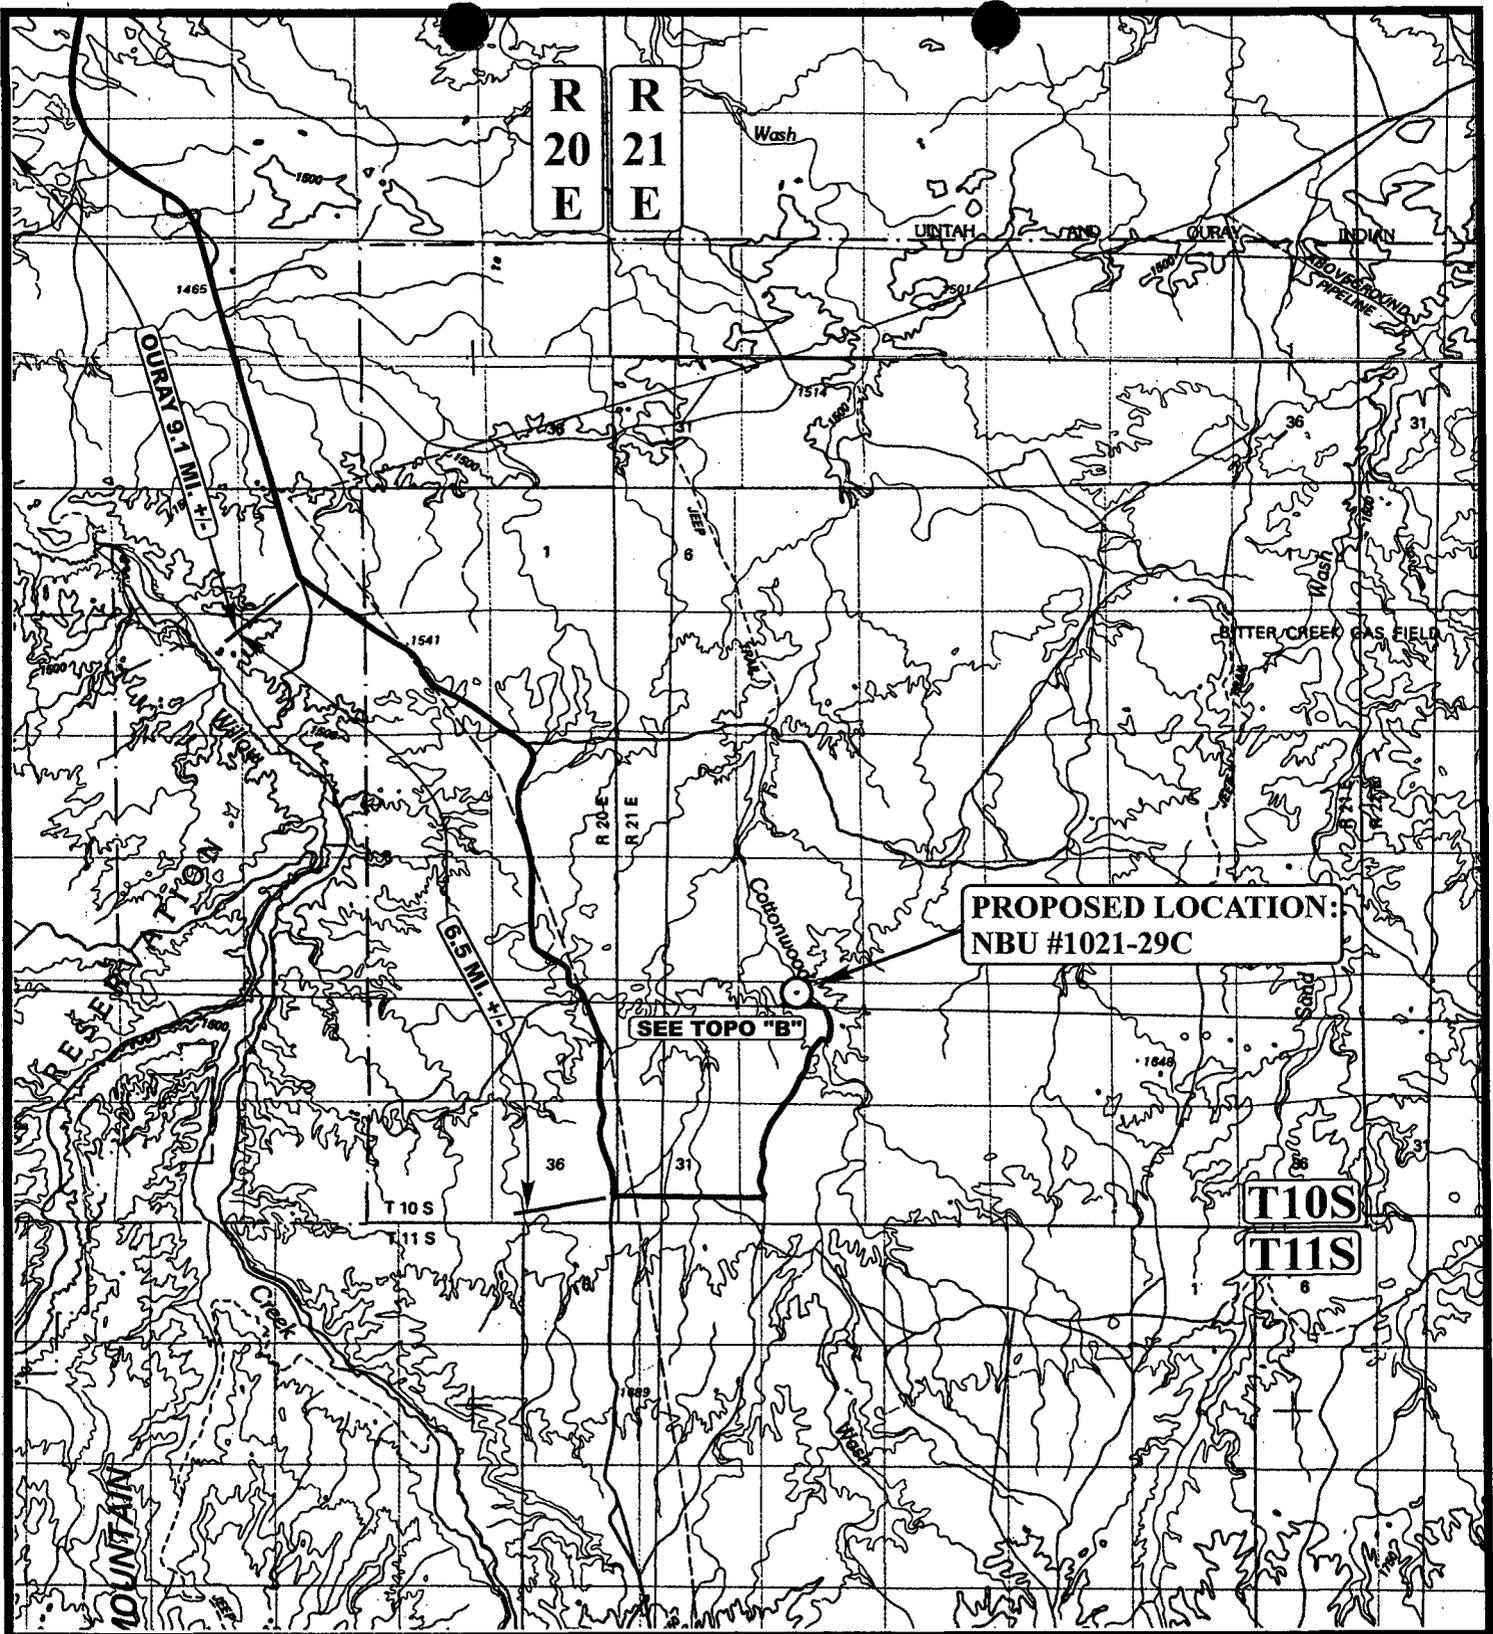

**PROPOSED LOCATION:
NBU #1021-29C**

SEE TOPO "B"

LEGEND:

○ PROPOSED LOCATION

Kerr-McGee Oil & Gas Onshore LP

NBU #1021-29C

SECTION 29, T10S, R21E, S.L.B.&M.


476' FNL 2501' FWL

UES **Utah Engineering & Land Surveying**
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC **11 21 06**
MAP MONTH DAY YEAR
 SCALE: 1:100,000 DRAWN BY: L.K. REVISED: 00-00-00



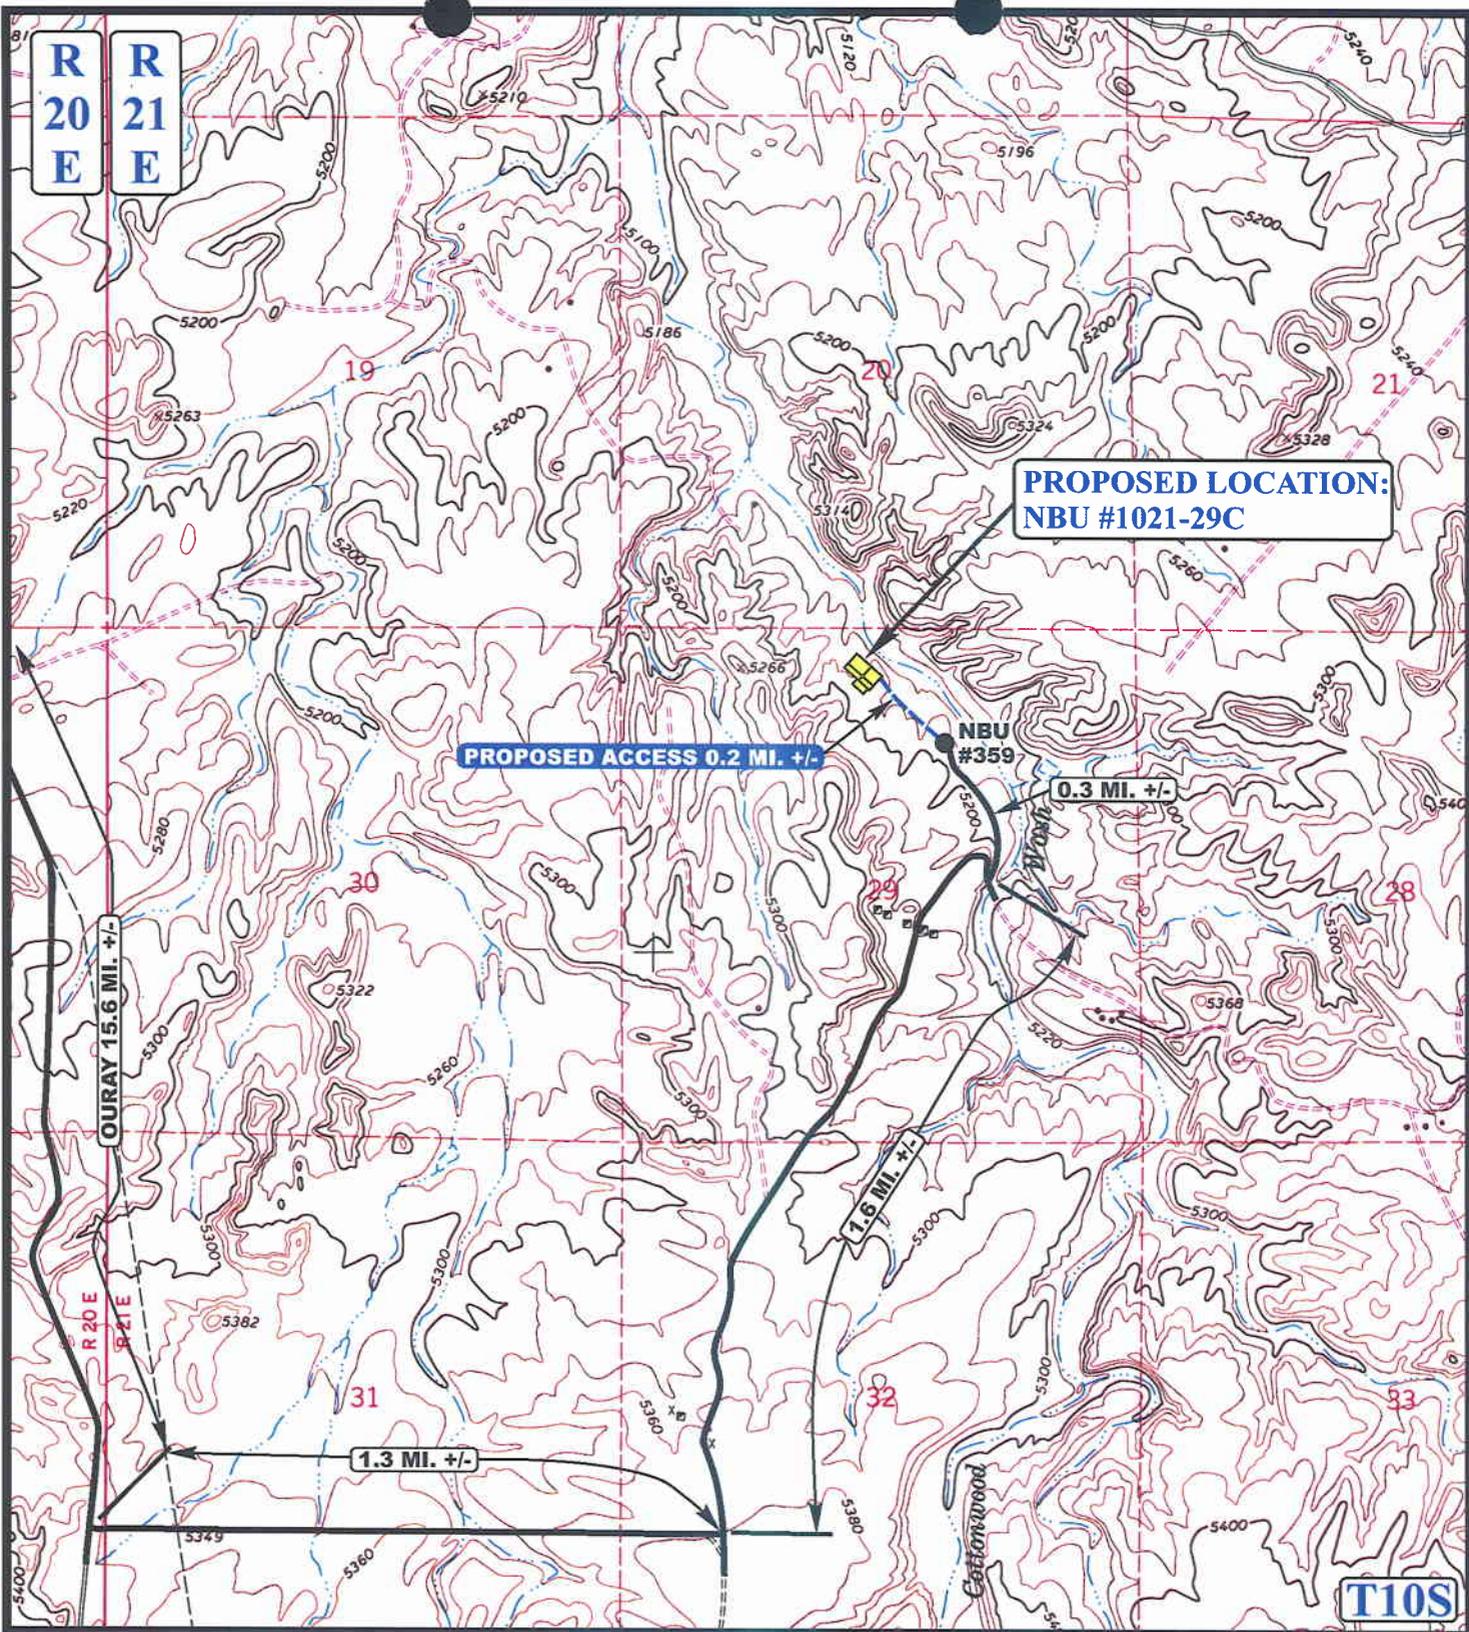

**PROPOSED LOCATION:
NBU #1021-29C**

PROPOSED ACCESS 0.2 MI. +/-

NBU #359

0.3 MI. +/-

OURAY 15.6 MI. +/-

1.6 MI. +/-

1.3 MI. +/-

T10S

LEGEND:

-  EXISTING ROAD
-  PROPOSED ACCESS ROAD




Kerr-McGee Oil & Gas Onshore LP

**NBU #1021-29C
SECTION 29, T10S, R21E, S.L.B.&M.
476' FNL 2501' FWL**

U E L S
Utah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC **11 21 06**
MAP MONTH DAY YEAR
 SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 00-00-00 **B**
 TOPO

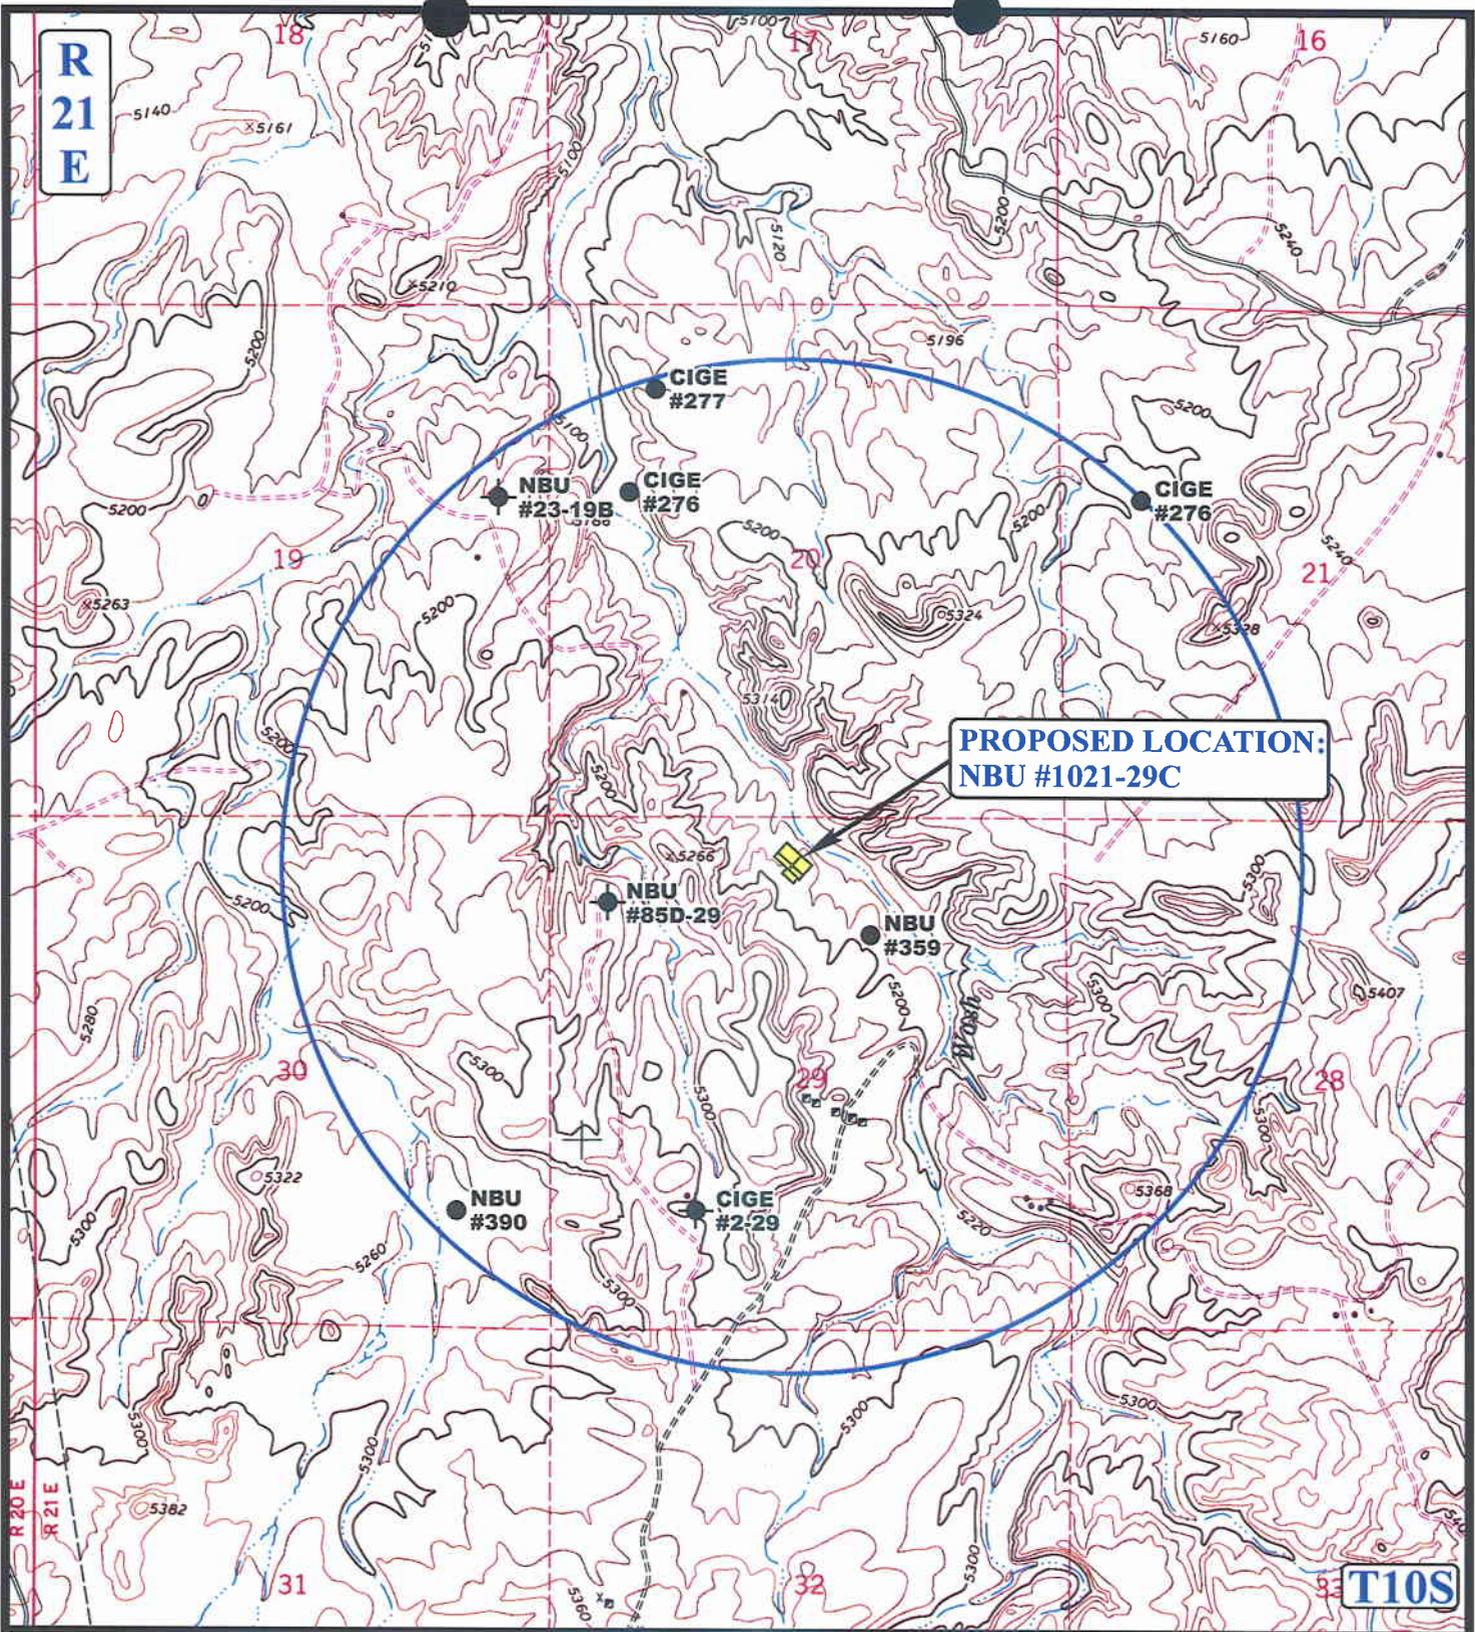

**PROPOSED LOCATION:
NBU #1021-29C**

LEGEND:

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- ⬮ SHUT IN WELLS
- ⊗ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED



Kerr-McGee Oil & Gas Onshore LP

**NBU #1021-29C
SECTION 29, T10S, R21E, S.L.B.&M.
476' FNL 2501' FWL**




Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC 11 21 06
MAP MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 00-00-00



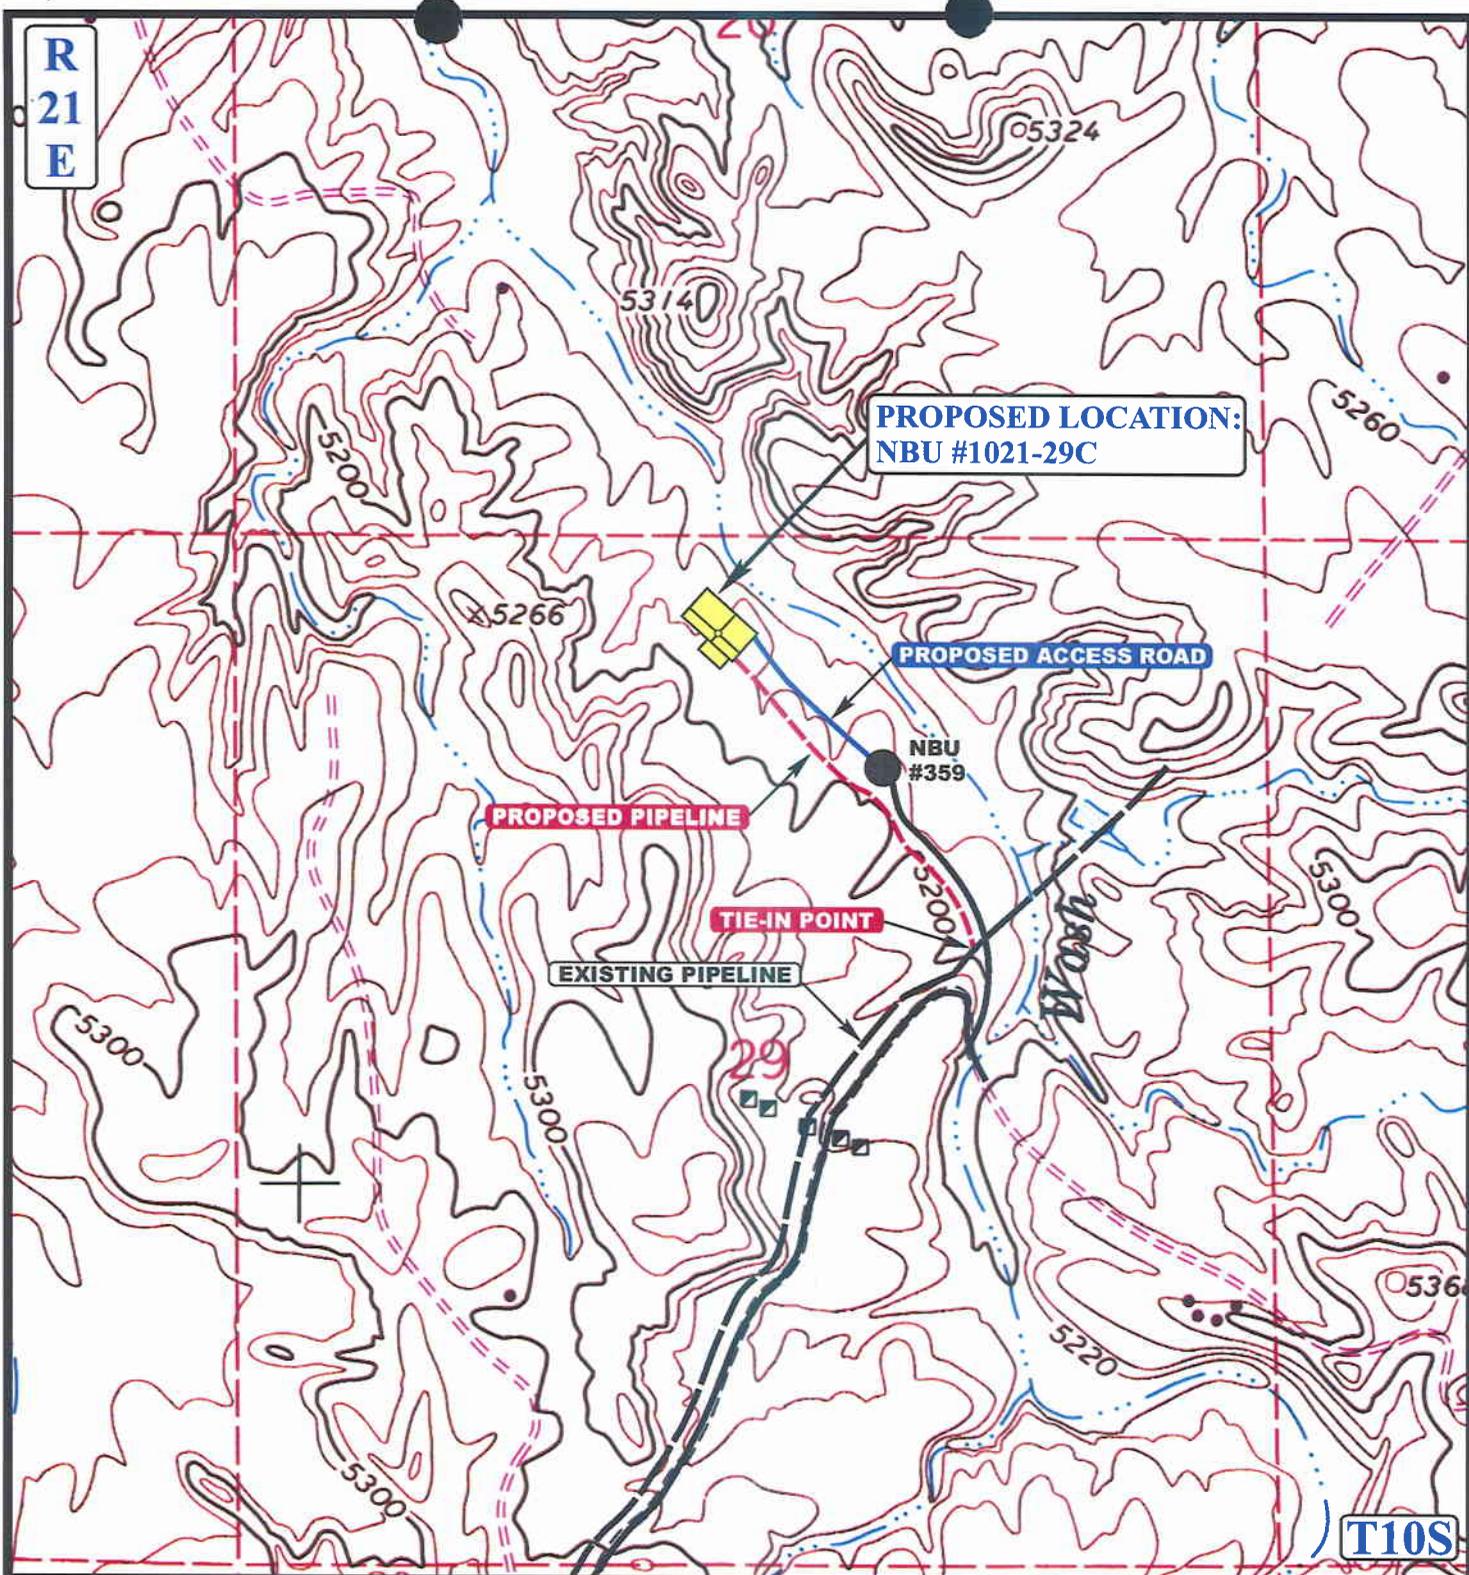

APPROXIMATE TOTAL PIPELINE DISTANCE = 2,000' +/-

LEGEND:

-  PROPOSED ACCESS ROAD
-  EXISTING PIPELINE
-  PROPOSED PIPELINE
-  PROPOSED PIPELINE (SERVICING OTHER WELLS)



Kerr-McGee Oil & Gas Onshore LP

NBU #1021-29C
SECTION 29, T10S, R21E, S.L.B.&M.
476' FNL 2501' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC **11 21 06**
MAP MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: L.K. REVISED: 00-00-00



Kerr-McGee Oil & Gas Onshore LP

NBU #1021-29C

PIPELINE ALIGNMENT

LOCATED IN UINTAH COUNTY, UTAH

SECTION 29, T10S, R21E, S.L.B.&M.



PHOTO: VIEW FROM TIE-IN POINT

CAMERA ANGLE: NORTHWESTERLY



- Since 1964 -

UELS Uintah Engineering & Land Surveying

85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

PIPELINE PHOTOS

11 21 06
MONTH DAY YEAR

PHOTO

TAKEN BY: L.K.


DRAWN BY: L.K.

REVISED: 00-00-00

LOCATION LAYOUT FOR

NBU #1021-29C
SECTION 29, T10S, R21E, S.L.B.&M.

476' FNL 2501' FWL



SCALE: 1" = 50'
DATE: 11-21-06
Drawn By: C.H.

NOTE:
Flare Pit is to be located a min. of 100' from the Well Head.

Existing Pipeline Re-Route as Needed

CONSTRUCT DIVERSION DITCH

FLARE PIT

Pit Topsoil

C-1.8' El. 92.8'

El. 92.2' C-11.2' (btm. pit)

RESERVE PITS (10' Deep)

Total Pit Capacity W/2' of Freeboard = 15,490 Bbls. ±
Total Pit Volume = 4,280 Cu. Yds.

El. 95.4' C-14.4' (btm. pit)

Reserve Pit Backfill & Spoils Stockpile

C-4.9' El. 95.9'

NOTES:

Elev. Ungraded Ground At Loc. Stake = 5192.7'

FINISHED GRADE ELEV. AT LOC. STAKE = 5191.0'


Approx. Toe of Fill Slope

F-8.3' El. 82.7'

Sta. 3+50

Round Corners as Needed

F-2.4' El. 88.6'



Existing Drainage

PIPE TUBS

PIPE RACKS

CATWALK

C-1.7' El. 92.7'

F-0.8' El. 90.2'

Sta. 1+50

C-2.3' El. 93.3'

TOILET

TRAILER

DOG HOUSE

LIGHT PLANT

BOILER

PUMP HOUSE

COMPRESSOR

BOOSTER

WATER TANK

Sta. 0+50

C-4.9' El. 95.9'

PROPANE STORAGE

C-4.0' El. 95.0'

Sta. 0+00

Approx. Top of Cut Slope

Proposed Access Road

C-1.3' El. 92.3'



Kerr-McGee Oil & Gas Onshore LP

FIGURE #2

TYPICAL CROSS SECTIONS FOR NBU #1021-29C SECTION 29, T10S, R21E, S.L.B.&M. 476' FNL 2501' FWL

1" = 20'
X-Section Scale
1" = 50'

DATE: 11-21-06
Drawn By: C.H.

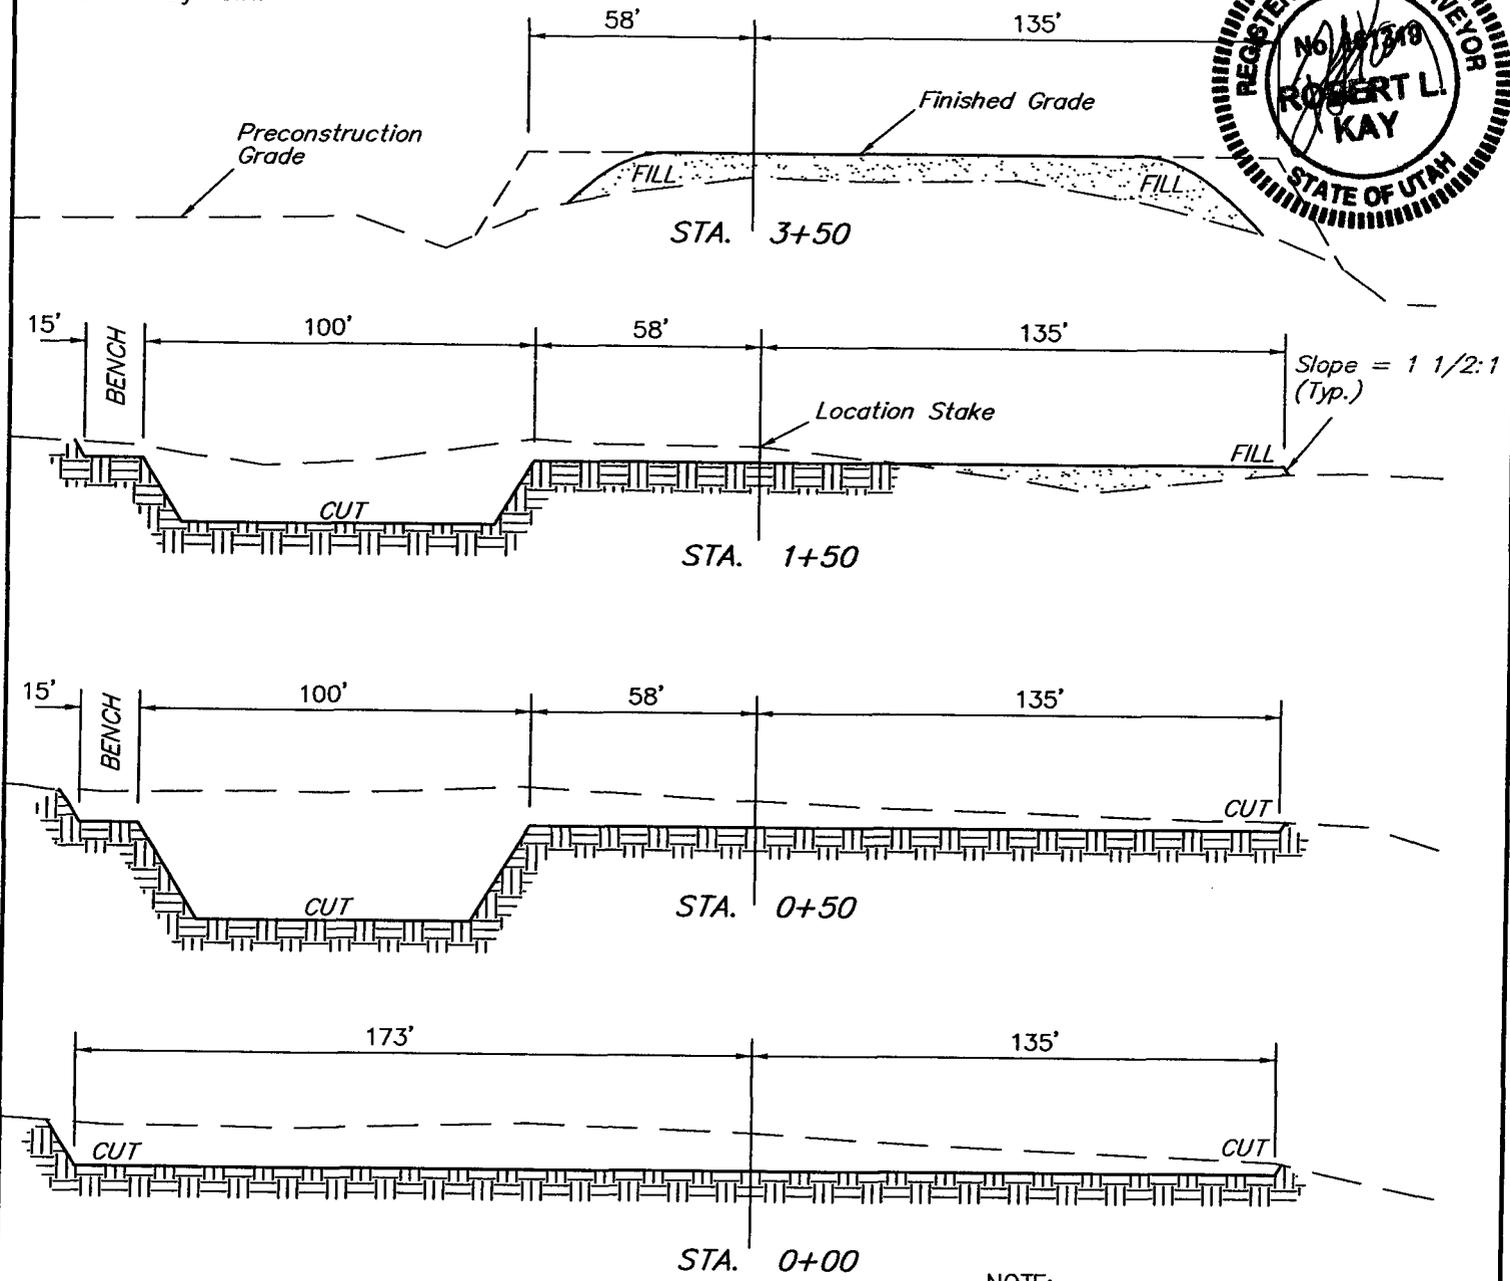

* NOTE:
FILL QUANTITY INCLUDES
5% FOR COMPACTION

NOTE:
Topsoil should not be
Stripped Below Finished
Grade on Substructure Area.

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,800 Cu. Yds.
Remaining Location	= 7,540 Cu. Yds.
TOTAL CUT	= 9,340 CU.YDS.
FILL	= 5,400 CU.YDS.

EXCESS MATERIAL	= 3,940 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,940 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	= 0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 02/02/2007

API NO. ASSIGNED: 43-047-39018

WELL NAME: NBU 1021-29C
 OPERATOR: KERR-MCGEE OIL & GAS (N2995)
 CONTACT: SHEILA UPCHEGO

PHONE NUMBER: 435-781-7024

PROPOSED LOCATION:

NENW 29 100S 210E
 SURFACE: 0476 FNL 2501 FWL
 BOTTOM: 0476 FNL 2501 FWL
 COUNTY: UINTAH
 LATITUDE: 39.92464 LONGITUDE: -109.5755
 UTM SURF EASTINGS: 621731 NORTHINGS: 4420154
 FIELD NAME: NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering	DUD	2/27/07
Geology		
Surface		

LEASE TYPE: 3 - State
 LEASE NUMBER: ML-21330
 SURFACE OWNER: 3 - State

PROPOSED FORMATION: WSMVD
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[] Ind[] Sta[] Fee[]
(No. 22013542)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 43-8496)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)

LOCATION AND SITING:

- ___ R649-2-3.
- Unit: NATURAL BUTTES
- ___ R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- ___ R649-3-3. Exception
- Drilling Unit
Board Cause No: 123-14
Eff Date: 12-2-1999
Siting: 460' fr 1/2 way of uncomm. Traces
- ___ R649-3-11. Directional Drill

COMMENTS:

Needs Permit (02-13-07)

STIPULATIONS:

- 1- STATEMENT OF BASIS
- 2- OIL BILL
- 3- Surface Csg Cont Step

Application for Permit to Drill

Statement of Basis

2/21/2007

Utah Division of Oil, Gas and Mining

Page 1

APD No	API WellNo	Status	Well Type	Surf Ownr	CBM
244	43-047-39018-00-00		GW	S	No
Operator	KERR-MCGEE OIL & GAS ONSHORE, LP		Surface Owner-APD		
Well Name	NBU 1021-29C		Unit		
Field	UNDESIGNATED		Type of Work		
Location	NENW 29 10S 21E S 0 FL 0 FL GPS Coord (UTM) 621731E 4420154N				

Geologic Statement of Basis

Kerr McGee proposes to set 2,000' of surface casing at this location. The depth to the base of the moderately saline water at this location is estimated to be at a depth of 4,200'. A search of Division of Water Rights records shows no water wells within a 10,000 foot radius of the center of Section 29. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be a significant source of useable ground water. Production casing cement should be brought up above the base of the moderately saline ground water to isolate it from fresher waters uphole.

Brad Hill
APD Evaluator

2/21/2007
Date / Time

Surface Statement of Basis

The general area is within the Cottonwood Wash Drainage. The area is characterized by rolling hills and benches, which are frequently intersected by somewhat gentle draws, which flow into Cottonwood Wash. The draws are occasionally rimmed with steep side hills, which have exposed sand stone bedrock cliffs along the rims. Cottonwood Wash is an ephemeral drainage, which drains northerly approximately 11 miles to the White River. No seeps, springs or streams exist in the area.

This location is approximately 19 miles southeast of Ouray, Ut. and is accessed by the Seep Ridge Road then by existing or planned oil field development roads to within approximately 0.2 miles of the site, which will require new construction.

The proposed location is on a bench, which parallels the bottom of Cottonwood Wash. Slopes with a draw into Cottonwood Wash are on the northeast part of the location. A ridge across Cottonwood Wash has exposed sandstone bedrock. Two drainages intersect the location. A portion of one will be diverted around the reserve pit area. An existing pipeline runs across a portion of the proposed reserve pit. It will be moved. The width of the pad may be reduced depending on the drilling rig selected to drill the well.

Both the surface and minerals are owned by SITLA. Jim Davis represented SITLA at the pre-site investigation. Mr. Davis had no concerns pertaining to this location. The selected location appears to be the best site for drilling and operating a well in the immediate area

Floyd Bartlett
Onsite Evaluator

2/13/2007
Date / Time

Conditions of Approval / Application for Permit to Drill

Category	Condition
Pits	A synthetic liner with a minimum thickness of 20 mils with a felt subliner shall be properly installed and maintained in the reserve pit.
Surface	Drainages adjacent to the proposed pad shall be diverted around the location.

ON-SITE PREDRILL EVALUATION

Utah Division of Oil, Gas and Mining

Operator KERR-MCGEE OIL & GAS ONSHORE, LP
Well Name NBU 1021-29C
API Number 43-047-39018-0 **APD No** 244 **Field/Unit** UNDESIGNATED
Location: 1/4,1/4 NENW **Sec** 29 **Tw** 10S **Rng** 21E 0 FL 0 FL
GPS Coord (UTM) 621738 4420150 **Surface Owner**

Participants

Floyd Bartlett and David Hackford (DOGM), Jim Davis (SITLA), Carroll Estes, Tony Kznick, and Clay Einerson (Kerr McGee), David Kay (Uintah Engineering and Land Surveying), and Ben Williams (UDWR)

Regional/Local Setting & Topography

The general area is within the Cottonwood Wash Drainage. The area is characterized by rolling hills and benches, which are frequently intersected by somewhat gentle draws, which flow into Cottonwood Wash. The draws are occasionally rimmed with steep side hills, which have exposed sand stone bedrock cliffs along the rims. Cottonwood Wash is an ephemeral drainage, which drains northerly approximately 11 miles to the White River. No seeps, springs or streams exist in the area.

This location is approximately 19 miles southeast of Ouray, Ut. and is accessed by the Seep Ridge Road then by existing or planned oil field development roads to within approximately 0.2 miles of the site, which will require new construction.

The proposed location is on a bench, which parallels the bottom of Cottonwood Wash. Slopes with a draw into Cottonwood Wash are on the northeast part of the location. A ridge across Cottonwood Wash has exposed sandstone bedrock. Two drainages intersect the location. A portion of one will be diverted around the pit area.

Surface Use Plan

Current Surface Use

Grazing
Recreational
Wildlife Habitat

New Road

Miles	Well Pad		Src Const Material	Surface Formation
0.2	Width 308	Length 350	Onsite	UNTA

Ancillary Facilities N

Waste Management Plan Adequate? Y

Environmental Parameters

Affected Floodplains and/or Wetland N

Flora / Fauna

Snow covered the vegetation on the area. Identifiable vegetation consisted of shadscale, big sagebrush, curly mesquite, rabbit brush and cheat grass. Vegetation is abundant.

Antelope, cattle, rabbits, coyotes, and small mammals, birds and raptors.

Soil Type and Characteristics

Deep sandy laom.

Erosion Issues N

Sedimentation Issues N

Site Stability Issues N

Drainage Diversion Required Y
Around corner of reserve pit.

Berm Required? N

Erosion Sedimentation Control Required? N

Paleo Survey Run? N Paleo Potential Observed? N Cultural Survey Run? Y Cultural Resources? N

Reserve Pit

Site-Specific Factors		Site Ranking	
Distance to Groundwater (feet)	>200	0	
Distance to Surface Water (feet)	>1000	0	
Dist. Nearest Municipal Well (ft)	>5280	0	
Distance to Other Wells (feet)	300 to 1320	10	
Native Soil Type	Mod permeability	10	
Fluid Type	Fresh Water	5	
Drill Cuttings	Normal Rock	0	
Annual Precipitation (inches)	<10	0	
Affected Populations	<10	0	
Presence Nearby Utility Conduits	Not Present	0	
	Final Score	25	1 Sensitivity Level

Characteristics / Requirements

The proposed reserve pit is 100' x 150' x 10' deep located in a cut on the south east corner of the location. A 20 mil liner with a felt sub-liner is planned by Kerr McGee.

Closed Loop Mud Required? N Liner Required? Y Liner Thickness 20 Pit Underlayment Required? Y

Other Observations / Comments

Ben Williams representing the UDWR stated the area is classified as yearlong critical habitat for antelope. He stated that the lack of water not forage is the limiting factor affecting the herd in the area. He recommended no restrictions for antelope. No other wildlife is expected to be significantly affected. He gave Jim Davis of SITLA and Carroll Estes of Kerr McGee a copy of his wildlife evaluation and a UDWR recommended seed mix to be used when revegetating the location.

The area was covered with snow. ATV's were used to access the site.

An existing pipeline runs across a portion of the proposed reserve pit. It will be moved. The width of the pad may be reduced depending on the drilling rig selected to drill the well.

Floyd Bartlett
Evaluator

2/13/2007
Date / Time

Well name:	2007-02 Kerr McGee NBU 1021-29C		
Operator:	Kerr McGee Oil & Gas Onshore L.P.		
String type:	Surface	Project ID:	43-047-39018
Location:	Uintah County, Utah		

Design parameters:

Collapse

Mud weight: 8.400 ppg
 Design is based on evacuated pipe.

Burst

Max anticipated surface pressure: 1,672 psi
 Internal gradient: 0.120 psi/ft
 Calculated BHP: 1,900 psi

 No backup mud specified.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Tension:

8 Round STC: 1.80 (J)
 8 Round LTC: 1.80 (J)
 Buttress: 1.60 (J)
 Premium: 1.50 (J)
 Body yield: 1.50 (B)

Tension is based on buoyed weight.
 Neutral point: 1,666 ft

Environment:

H2S considered? No
 Surface temperature: 75 °F
 Bottom hole temperature: 102 °F
 Temperature gradient: 1.40 °F/100ft
 Minimum section length: 1,500 ft

 Cement top: 1,407 ft

Non-directional string.

Re subsequent strings:

Next setting depth: 9,300 ft
 Next mud weight: 11.500 ppg
 Next setting BHP: 5,556 psi
 Fracture mud wt: 19.250 ppg
 Fracture depth: 1,900 ft
 Injection pressure: 1,900 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	1900	9.625	32.30	H-40	ST&C	1900	1900	8.876	839.6
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	829	1370	1.652	1900	2270	1.19	54	254	4.72 J

Prepared by: Helen Sadik-Macdonald
 Div of Oil, Gas & Minerals

Phone: (801) 538-5357
 FAX: (801) 359-3940

Date: February 23, 2007
 Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 1900 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Well name:	2007-02 Kerr McGee NBU 1021-29C		
Operator:	Kerr McGee Oil & Gas Onshore L.P.		
String type:	Production	Project ID:	43-047-39018
Location:	Uintah County, Utah		

Design parameters:

Collapse

Mud weight: 11,500 ppg
 Design is based on evacuated pipe.

Burst

Max anticipated surface pressure: 3,510 psi
 Internal gradient: 0.220 psi/ft
 Calculated BHP: 5,556 psi

 No backup mud specified.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Tension:

8 Round STC: 1.80 (J)
 8 Round LTC: 1.80 (J)
 Buttress: 1.60 (J)
 Premium: 1.50 (J)
 Body yield: 1.50 (B)

Tension is based on buoyed weight.
 Neutral point: 7,701 ft

Environment:

H2S considered? No
 Surface temperature: 75 °F
 Bottom hole temperature: 205 °F
 Temperature gradient: 1.40 °F/100ft
 Minimum section length: 1,500 ft

 Cement top: Surface

Non-directional string.

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	9300	4.5	11.60	I-80	LT&C	9300	9300	3.875	811.6
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	5556	6360	1.145	5556	7780	1.40	89	212	2.37 J

Prepared by: Helen Sadik-Macdonald
 Div of Oil, Gas & Minerals

Phone: (801) 538-5357
 FAX: (801) 359-3940

Date: February 23, 2007
 Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 9300 ft, a mud weight of 11.5 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:
3160
(UT-922)

February 7, 2007

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2007 Plan of Development Natural Buttes Unit Uintah County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2007 within the Natural Buttes Unit, Uintah County, Utah.

API #	WELL NAME	LOCATION
-------	-----------	----------

(Proposed PZ Wasatch/MesaVerde)

43-047-39004	NBU 1021-19C	Sec. 19 T. 10S R. 21E 0620 FNL 1904 FWL
43-047-39005	NBU 1021-19D	Sec. 19 T. 10S R. 21E 0637 FNL 0755 FWL
43-047-39006	NBU 1021-19E	Sec. 19 T. 10S R. 21E 2146 FNL 0879 FWL
43-047-39007	NBU 1021-19K	Sec. 19 T. 10S R. 21E 2181 FSL 2092 FWL
43-047-39008	NBU 1021-19N	Sec. 19 T. 10S R. 21E 0462 FSL 1845 FWL
43-047-39009	NBU 1021-29L	Sec. 29 T. 10S R. 21E 1398 FSL 0190 FWL
43-047-39010	NBU 1021-29O	Sec. 29 T. 10S R. 21E 0615 FSL 2115 FEL
43-047-39011	NBU 1021-29N	Sec. 29 T. 10S R. 21E 0250 FSL 1764 FWL
43-047-39012	NBU 1021-29J	Sec. 29 T. 10S R. 21E 1532 FSL 2192 FEL
43-047-39013	NBU 1021-29K	Sec. 29 T. 10S R. 21E 1804 FSL 2143 FWL
43-047-39014	NBU 1021-29I	Sec. 29 T. 10S R. 21E 2060 FSL 0962 FEL
43-047-39015	NBU 1021-29G	Sec. 29 T. 10S R. 21E 2090 FNL 1960 FEL
43-047-39016	NBU 1021-29F	Sec. 29 T. 10S R. 21E 1718 FNL 1529 FWL
43-047-39017	NBU 1021-29E	Sec. 29 T. 10S R. 21E 2635 FNL 1010 FWL
43-047-39018	NBU 1021-29C	Sec. 29 T. 10S R. 21E 0476 FNL 2501 FWL
43-047-39019	NBU 1021-29A	Sec. 29 T. 10S R. 21E 0170 FNL 0627 FEL
43-047-39020	NBU 1021-30I	Sec. 30 T. 10S R. 21E 2131 FSL 0387 FEL
43-047-39021	NBU 1021-30J	Sec. 30 T. 10S R. 21E 1901 FSL 1827 FEL
43-047-39022	NBU 1021-30K	Sec. 30 T. 10S R. 21E 1398 FSL 2686 FWL
43-047-39023	NBU 1021-30L	Sec. 30 T. 10S R. 21E 1602 FSL 0980 FWL
43-047-39024	NBU 1021-30M	Sec. 30 T. 10S R. 21E 0612 FSL 0462 FWL

Page 2

43-047-39025 NBU 1021-30N Sec. 30 T. 10S R. 21E 0942 FSL 1876 FWL
43-047-39026 NBU 1021-32A Sec. 32 T. 10S R. 21E 0646 FNL 0955 FEL
43-047-39027 NBU 1021-32B Sec. 32 T. 10S R. 21E 0837 FNL 2117 FEL
43-047-39028 NBU 1021-32C Sec. 32 T. 10S R. 21E 0664 FNL 1840 FWL
43-047-39029 NBU 1021-32F Sec. 32 T. 10S R. 21E 1909 FNL 2165 FWL
43-047-39001 NBU 1021-01G Sec. 01 T. 10S R. 21E 2660 FSL 1765 FEL
43-047-39002 NBU 1021-01O Sec. 01 T. 10S R. 21E 0245 FSL 2619 FEL
43-047-39003 NBU 1021-01P Sec. 01 T. 10S R. 21E 0888 FSL 1309 FEL
43-047-39030 NBU 1022-18A Sec. 18 T. 10S R. 22E 1007 FNL 0512 FEL
43-047-39031 NBU 1022-24I Sec. 24 T. 10S R. 22E 2045 FSL 1166 FEL
43-047-39032 NBU 1022-25B Sec. 25 T. 10S R. 22E 0403 FNL 1971 FEL
43-047-39033 NBU 1022-25H Sec. 25 T. 10S R. 22E 2604 FNL 0825 FEL

Our records indicate the NBU 1022-25H is closer than 460 feet from the Natural Buttes Unit boundary (approximately 36 feet).

We have no objections to permitting the wells so long as the unit operator receives an exception to the locating and siting requirements of the State of Utah (R649-3-2).

/s/ Michael L. Coulthard

bcc: File – Natural Buttes Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron
Fluid Chron

MCoulthard:mc:2-7-07

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

5. LEASE DESIGNATION AND SERIAL NUMBER:
ML-21330

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:
UNIT #891008900A

8. WELL NAME and NUMBER:
NBU 1021-29C

9. API NUMBER:
43-047-39018

10. FIELD AND POOL, OR WILDCAT:
NATURAL BUTTES

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL GAS WELL OTHER _____

2. NAME OF OPERATOR:
KERR MCGEE OIL & GAS ONSHORE LP

3. ADDRESS OF OPERATOR:
1368 SOUTH 1200 EAST CITY VERNAL STATE UT ZIP 84078

PHONE NUMBER:
(435) 781-7024

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 476'FNL, 2501'FWL COUNTY: UINTAH

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NENW 29 10S 21E STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input checked="" type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.


AN ON-SITE INSPECTION WAS CONDUCTED ON 02/13/2007 WITH UDOGM AND SITLA REPRESENTATIVES. IT WAS DECIDED AT THE ON-SITE INSPECTION TO CHANGE THE PROPOSED ACCESS ROAD FROM 0.2 +/- MILES TO 0.3 +/- MILES. THE PIPELINE WAS CHANGED FROM 2000' +/- OF 4" STEEL TO APPROXIMATELY 1594' +/- OF 4" STEEL PIPELINE.

PLEASE REFER TO THE ATTACHED REVISED TOPO MAPS FOR ACCESS ROAD AND PIPELINE PLACEMENT.

NAME (PLEASE PRINT) SHEILA UPCHEGO

TITLE SENIOR LAND ADMIN SPECIALIST

SIGNATURE



DATE 3/14/2007

(This space for State use only)

RECEIVED

MAR 21 2007

DIV. OF OIL, GAS & MINING

Kerr-McGee Oil & Gas Onshore LP
NBU #1022-19C
SECTION 19, T10S, R22E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 11.2 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 8.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY, THEN NORTHWESTERLY DIRECTION APPROXIMATELY 0.7 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTHWEST; FOLLOW ROAD FLAGS IN A NORTHWESTERLY, THEN NORTHERLY DIRECTION APPROXIMATELY 0.3 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 52.1 MILES.

Kerr-McGee Oil & Gas Onshore LP

NBU #1022-19C

LOCATED IN UINTAH COUNTY, UTAH
SECTION 19, T10S, R22E, S.L.B.&M.

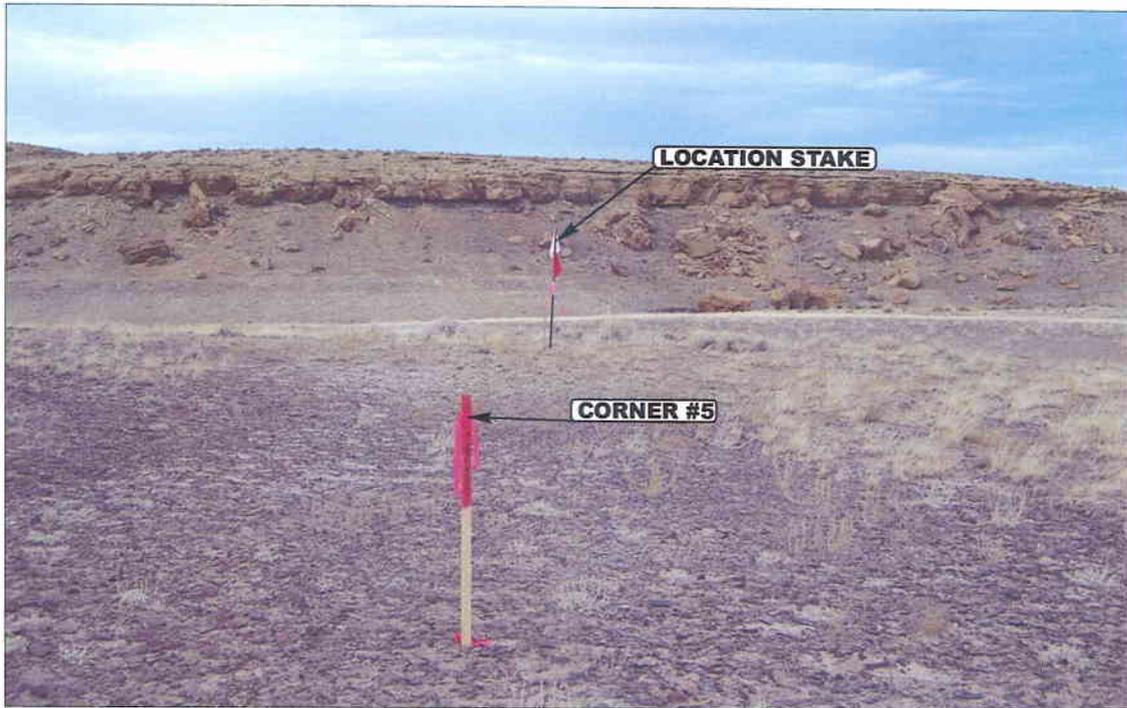


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHWESTERLY



- Since 1964 -

U
E
L
S
Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS


11 08 05
MONTH DAY YEAR

PHOTO

TAKEN BY: D.K.

DRAWN BY: C.P.

REV: 01-16-07 L.K.

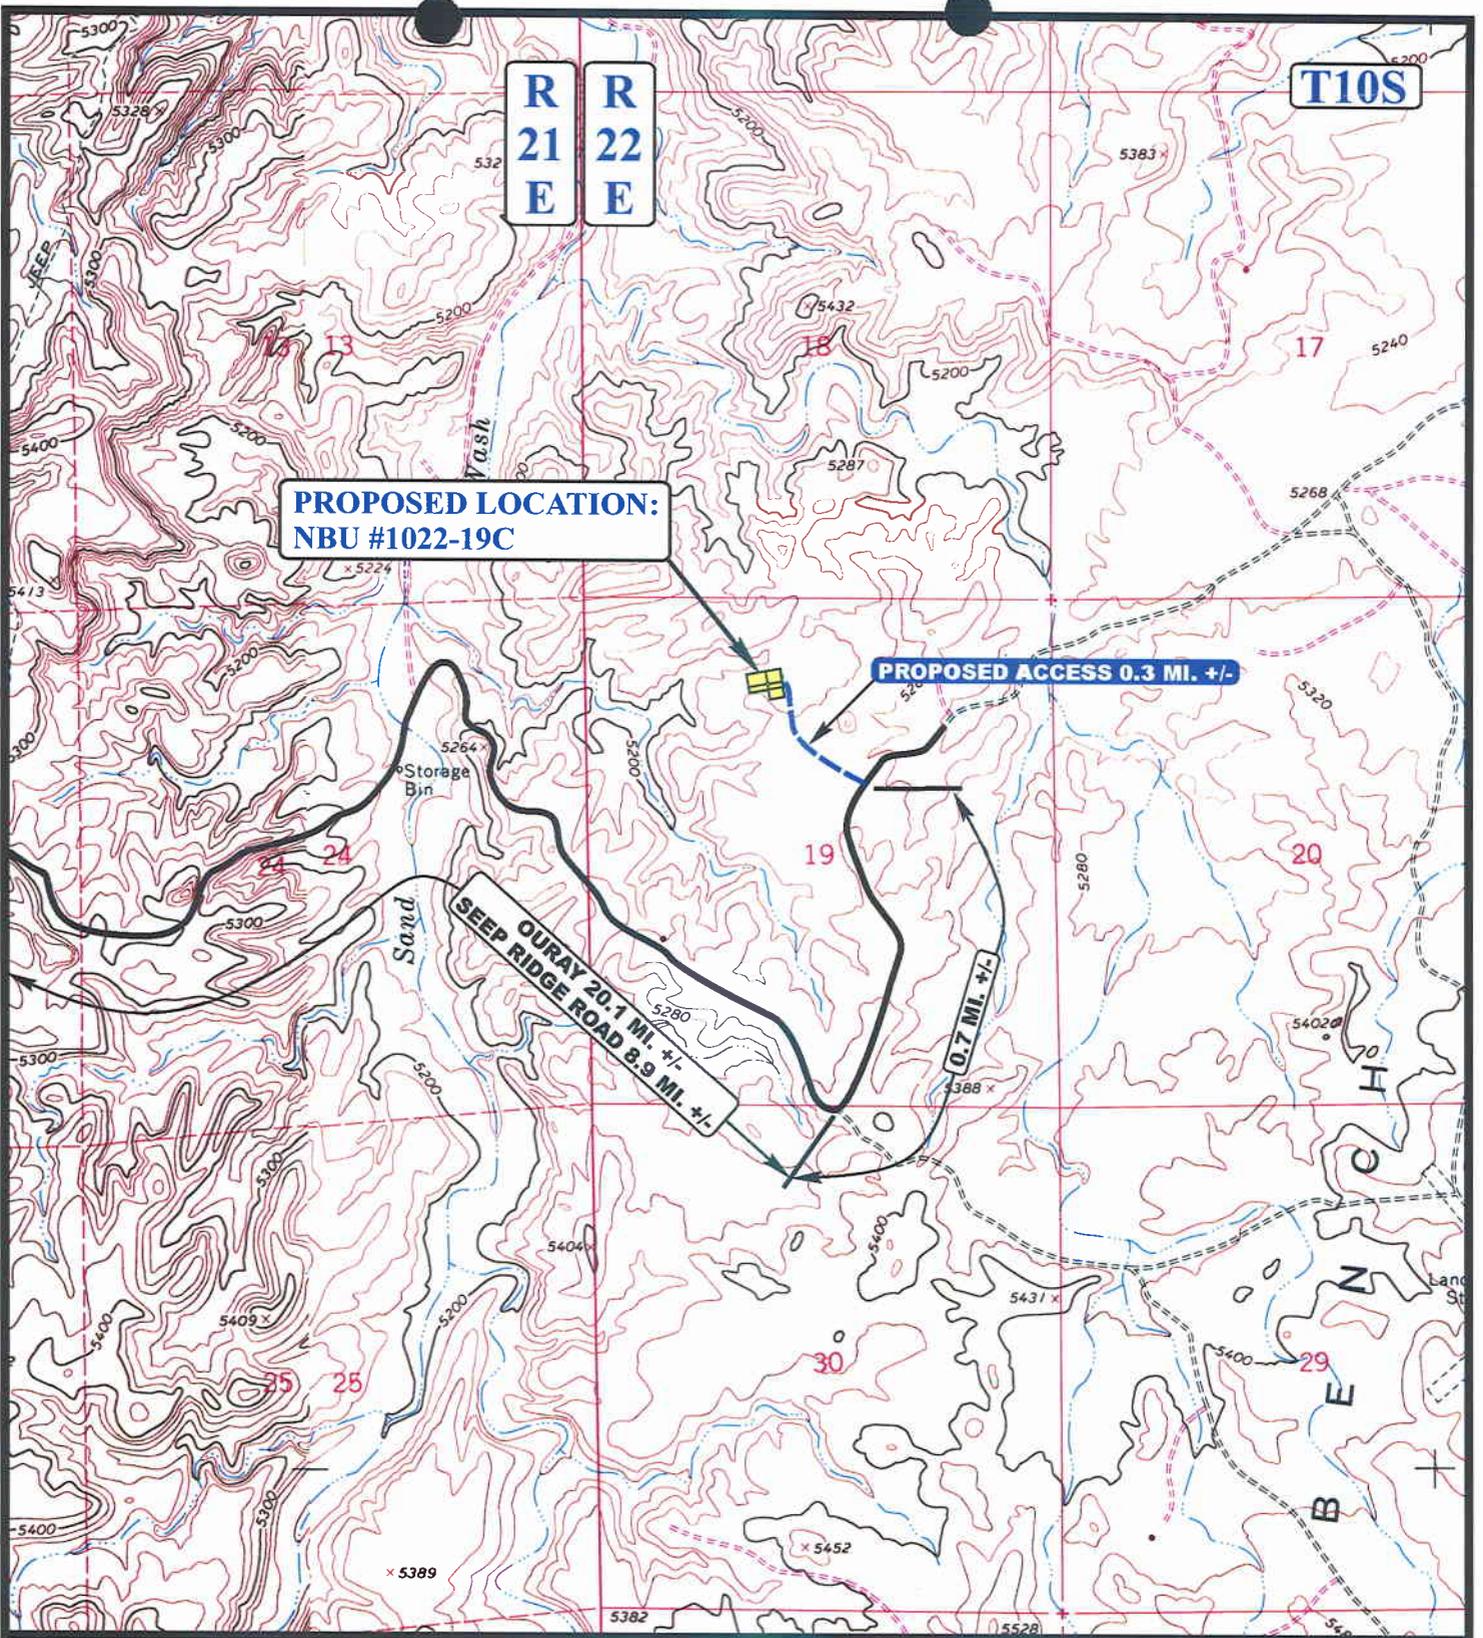

**PROPOSED LOCATION:
NBU #1022-19C**

PROPOSED ACCESS 0.3 MI. +/-

**SEEP OURAY 20.1 MI. +/-
SAND RIDGE ROAD 8.9 MI. +/-**

0.7 MI. +/-

LEGEND:

-  EXISTING ROAD
-  PROPOSED ACCESS ROAD


Kerr-McGee Oil & Gas Onshore LP

**NBU #1022-19C
SECTION 19, T10S, R22E, S.L.B.&M.
896' FNL 1891' FWL**

UEIS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC MAP 11 08 05
MONTH DAY YEAR
SCALE: 1" = 2000' DRAWN BY: C.P. REV: 01-16-07 L.K. **TOPO**

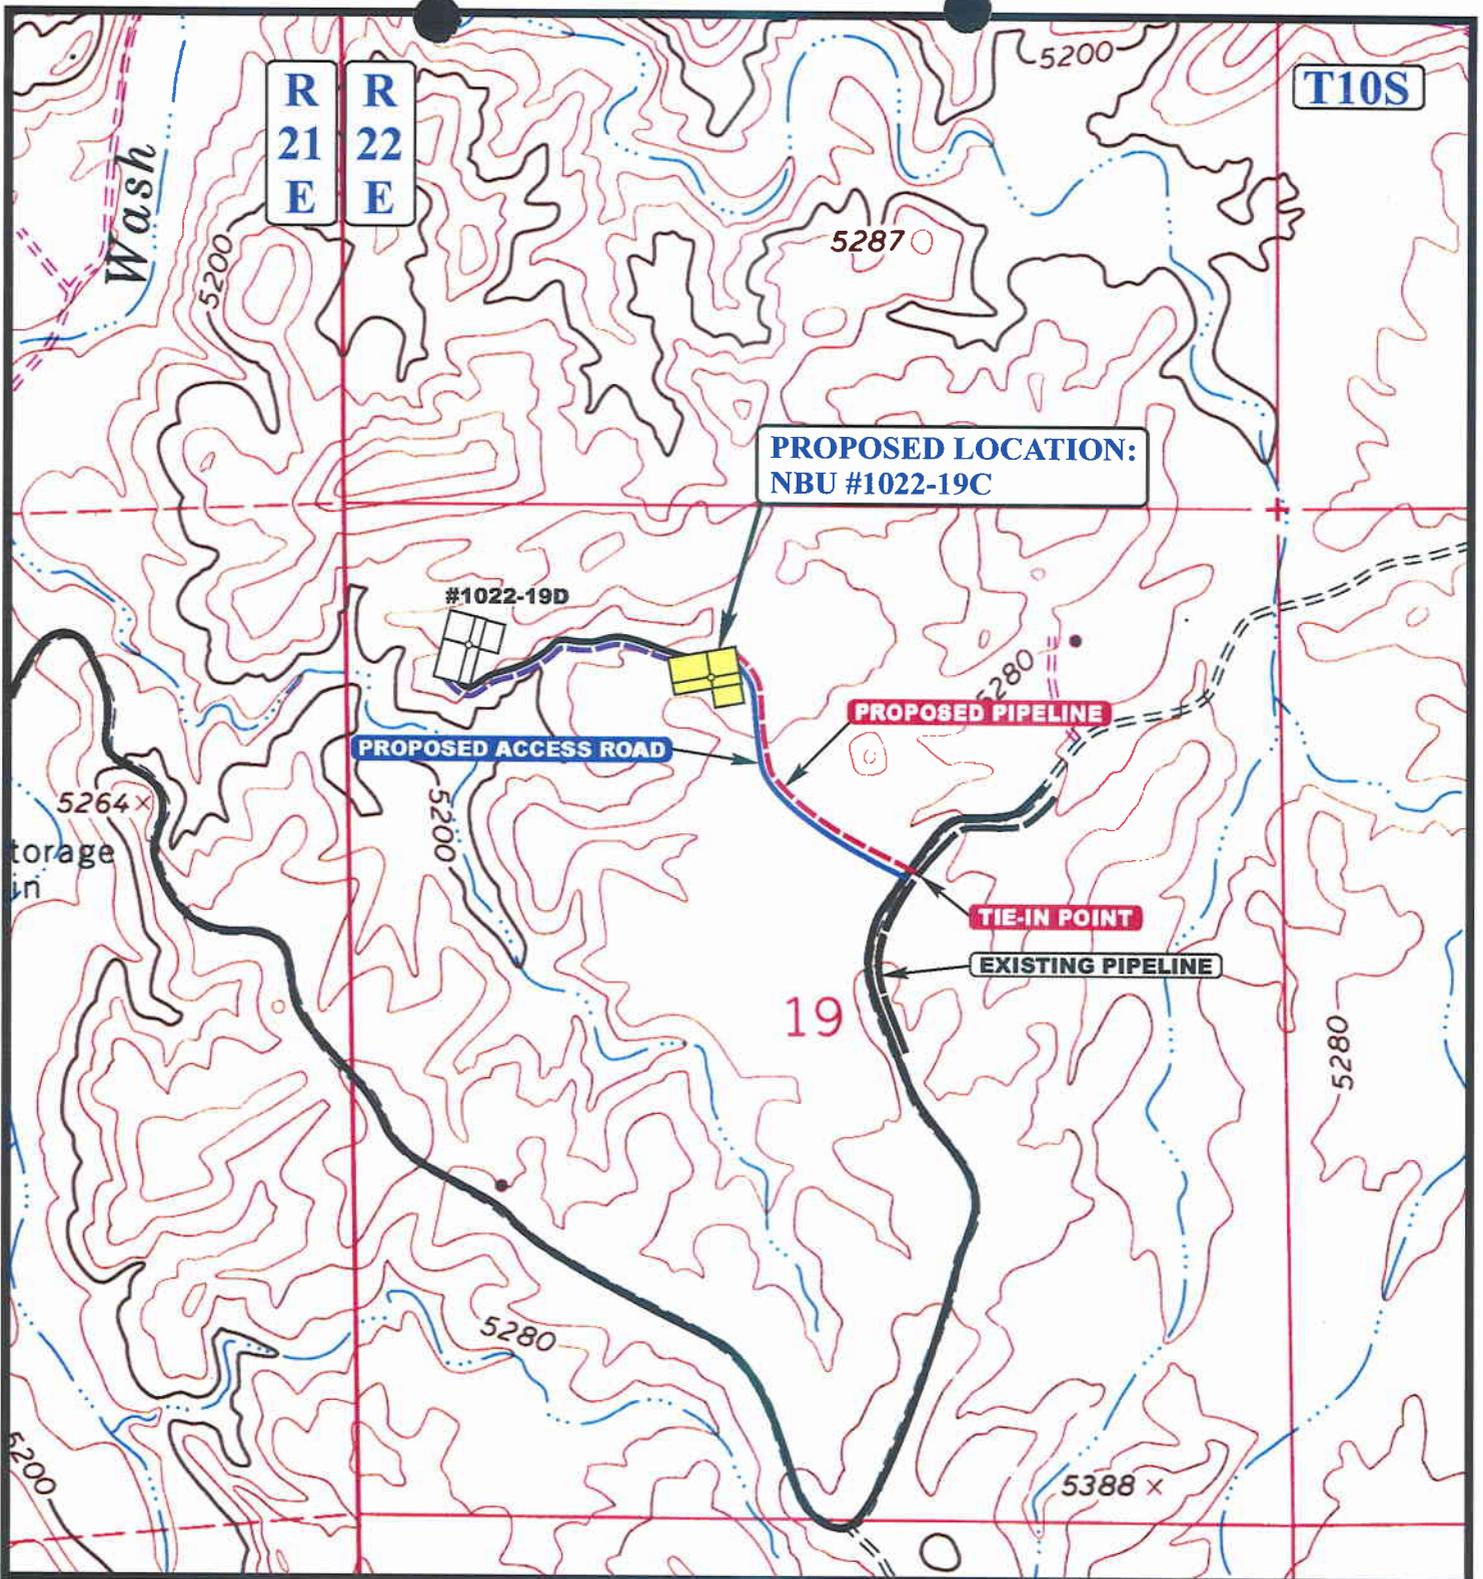

APPROXIMATE TOTAL PIPELINE DISTANCE = 1,594' +/-

LEGEND: 		Kerr-McGee Oil & Gas Onshore LP NBU #1022-19C SECTION 19, T10S, R22E, S.L.B.&M. 896' FNL 1891' FWL	
		Uintah Engineering & Land Surveying 85 South 200 East Vernal, Utah 84078 (435) 789-1017 * FAX (435) 789-1813	TOPOGRAPHIC 12 14 05 MAP MONTH DAY YEAR SCALE: 1" = 1000' DRAWN BY: C.P. REV: 01-16-07 L.K.

From: Ed Bonner
To: Mason, Diana
Date: 5/22/2007 5:05 PM
Subject: Well Clearance

CC: Davis, Jim; Garrison, LaVonne; Hill, Brad; Hunt, Gil

The following wells have been given cultural resources clearance by the Trust Lands Cultural Resources Group:

Dominion Exploration & Production, Inc
LCU 5-36F (API 43 047 38785)

Gasco Production Company
State 21-32B (API 43 047 39170)
State 22-32A (API 43 047 39171)
State 21-32A (API 43 047 39172)

Kerr McGee Oil & Gas Onshore LP
NBU 1021-29L (API 43 047 39009)
NBU 1021-29O (API 43 047 39010)
NBU 1021-29N (API 43 047 39011)
NBU 1021-29J (API 43 047 39012)
NBU 1021-29K (API 43 047 39013)
NBU 1021-29I (API 43 047 39014)
NBU 1021-29G (API 43 047 39015)
NBU 1021-29F (API 43 047 39016)
NBU 1021-29E (API 43 047 39017)
NBU 1021-29C (API 43 047 39018)
NBU 1021-29A (API 43 047 39019)
NBU 1021-29P (API 43 047 39110)

Royale Energy, Inc
Trail Canyon 1-1 (API 43 019 31531)
Trail Canyon 2-1 (API 43 019 31532)

XTO Energy, Inc
State of Utah 18-7-1-13 (API 43 015 30694)

If you have any questions regarding this matter please give me a call.



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

May 23, 2007

Kerr McGee Oil & Gas Onshore LP
1368 S 1200 E
Vernal, UT 84078

Re: Natural Buttes Unit 1021-29C Well, 476' FNL, 2501' FWL, NE NW, Sec. 29,
T. 10 South, R. 21 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-39018.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
SITLA
Bureau of Land Management, Vernal Office

4. Compliance with the State of Utah Antiquities Act forbids disturbance of archeological, historical, or paleontological remains. Should archeological, historical or paleontological remains be encountered during your operations, you are required to immediately suspend all operations and immediately inform the Trust Lands Administration and the Division of State History of the discovery of such remains.
5. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)
6. Surface casing shall be cemented to the surface.
7. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS			5. LEASE DESIGNATION AND SERIAL NUMBER: ML-21330
			6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.			7. UNIT or CA AGREEMENT NAME: UNIT #891008900A
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____	8. WELL NAME and NUMBER: NBU 1021-29C		9. API NUMBER: 43-047-39018
2. NAME OF OPERATOR: KERR MCGEE OIL & GAS ONSHORE LP		10. FIELD AND POOL, OR WILD CAT: NATURAL BUTTES	
3. ADDRESS OF OPERATOR: 1368 SOUTH 1200 EAST CITY VERNAL STATE UT ZIP 84078		PHONE NUMBER: (435) 781-7024	
4. LOCATION OF WELL FOOTAGES AT SURFACE: 476'FNL, 2501'FWL		COUNTY: UINTAH	
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NENW 29 10S 21E		STATE: UTAH	

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input checked="" type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

AN ON-SITE INSPECTION WAS CONDUCTED ON 02/13/2007 WITH UDOGM AND SITLA REPRESENTATIVES. IT WAS DECIDED AT THE ON-SITE INSPECTION TO CHANGE THE PROPOSED ACCESS ROAD FROM 0.2 +/- MILES TO 0.3 +/- MILES. THE PIPELINE WAS CHANGED FROM 2000' +/- OF 4" STEEL TO APPROXIMATELY 1594' +/- OF 4" STEEL PIPELINE.

PLEASE REFER TO THE ATTACHED REVISED TOPO MAPS FOR ACCESS ROAD AND PIPELINE PLACEMENT.

NAME (PLEASE PRINT) SHEILA UPCHEGO	TITLE SENIOR LAND ADMIN SPECIALIST
SIGNATURE	DATE 3/14/2007

(This space for State use only)

RECEIVED
MAR 21 2007
DIV. OF OIL, GAS & MINING

(5/2000) (See Instructions on Reverse Side)

Kerr-McGee Oil & Gas Onshore LP
NBU #1022-19C
SECTION 19, T10S, R22E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 11.2 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 8.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY, THEN NORTHWESTERLY DIRECTION APPROXIMATELY 0.7 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTHWEST; FOLLOW ROAD FLAGS IN A NORTHWESTERLY, THEN NORTHERLY DIRECTION APPROXIMATELY 0.3 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 52.1 MILES.

Kerr-McGee Oil & Gas Onshore LP

NBU #1022-19C

LOCATED IN UINTAH COUNTY, UTAH
SECTION 19, T10S, R22E, S.L.B.&M.



PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY

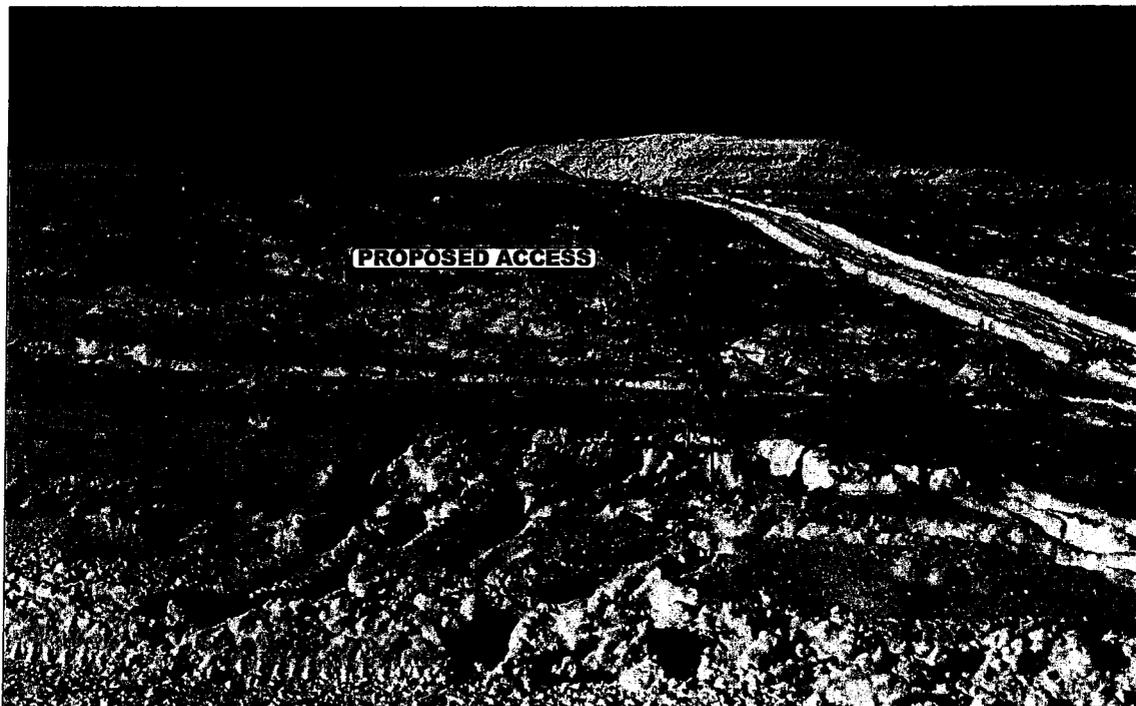


PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS


CAMERA ANGLE: NORTHWESTERLY



- Since 1964 -

UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS	11	08	05	PHOTO
	MONTH	DAY	YEAR	
TAKEN BY: D.K.	DRAWN BY: C.P.		REV: 01-16-07 L.K.	

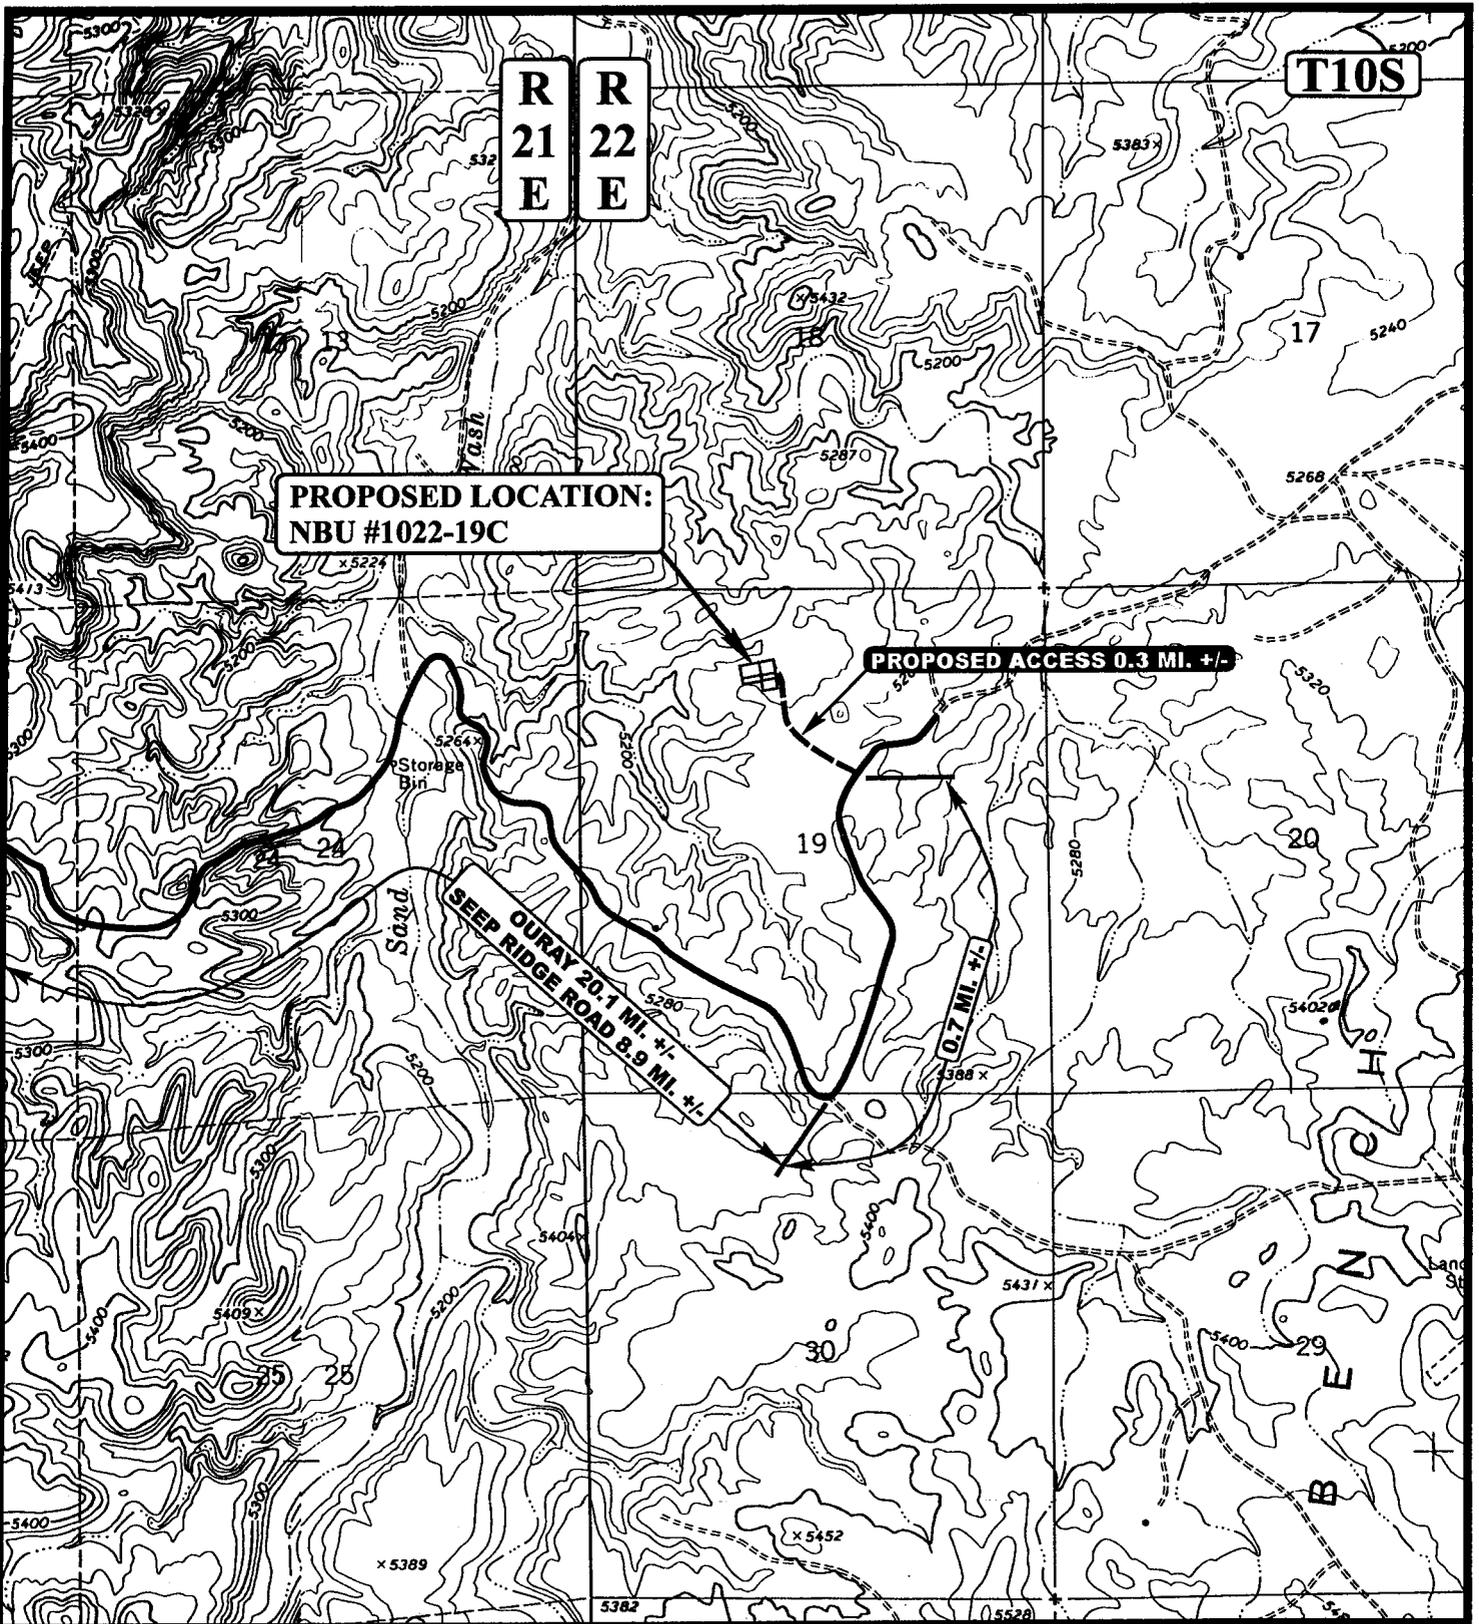

**PROPOSED LOCATION:
NBU #1022-19C**

PROPOSED ACCESS 0.3 MI. +/-

**SEEP RIDGE ROAD 20.1 MI. +/-
0.9 MI. +/-**

0.7 MI. +/-

LEGEND:

- EXISTING ROAD
- - - - - PROPOSED ACCESS ROAD



Kerr-McGee Oil & Gas Onshore LP

NBU #1022-19C

SECTION 19, T10S, R22E, S.L.B.&M.

896' FNL 1891' FWL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**

11 08 05
MONTH DAY YEAR



SCALE: 1" = 2000' DRAWN BY: C.P. REV: 01-16-07 L.K.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-21330
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: NA
		7. UNIT or CA AGREEMENT NAME: Natural Buttes Unit
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____	8. WELL NAME and NUMBER: NBU 1021-29C	
2. NAME OF OPERATOR: Kerr-McGee Oil & Gas Onshore, LP		9. API NUMBER: 4304739018
3. ADDRESS OF OPERATOR: PO Box 173779 CITY Denver STATE CO ZIP 80217-3779		10. FIELD AND POOL, OR WILDCAT: Natural Buttes Field
PHONE NUMBER: (720) 929-6171		
4. LOCATION OF WELL FOOTAGES AT SURFACE: 476 FNL & 2501 FWL		COUNTY: Uintah
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NENW 29 10S 21E		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: APD Extension
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Kerr McGee Oil and Gas Onshore, LP respectfully request a one year extension for NBU 1021-29C, in order to complete drilling operations. The Utah Division of Oil, Gas, and Mining initially approved this APD on 5/23/2007.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 07-08-08
By: [Signature]

COPY SENT TO OPERATOR
Date: 7.9.2008
Initials: ICS

NAME (PLEASE PRINT) <u>Victoria Marques</u>	TITLE <u>Regulatory Intern</u>
SIGNATURE <u>Victoria Marques</u>	DATE <u>6/23/2008</u>

(This space for State use only)

RECEIVED
JUN 27 2008
DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304739018
Well Name: NBU 1021-29C
Location: NENW 476 FNL & 2501 FWL Sec. 29 T 10S R 21E
Company Permit Issued to: Kerr McGee Oil and Gas Onshore, LP
Date Original Permit Issued: 5/23/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

Victoria Marquez
Signature

6/23/2008
Date

Title: Regulatory Intern

Representing: Kerr McGee Oil and Gas Onshore, LP

RECEIVED
JUN 27 2008
DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: ML-21330
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: NBU 1021-29C
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.	9. API NUMBER: 43047390180000
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	PHONE NUMBER: 720 929-6007 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0476 FNL 2501 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NENW Section: 29 Township: 10.0S Range: 21.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 6/26/2009 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Kerr-McGee Oil & Gas Onshore, L.P. (Kerr-McGee) respectfully requests an extension to this APD for the maximum time allowed. Please contact the undersigned with any questions and/or comments. Thank you.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: June 23, 2009

By: 

NAME (PLEASE PRINT) Danielle Piernot	PHONE NUMBER 720 929-6156	TITLE Regulatory Analyst
SIGNATURE N/A	DATE 6/23/2009	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047390180000

API: 43047390180000

Well Name: NBU 1021-29C

Location: 0476 FNL 2501 FWL QTR NENW SEC 29 TWP 100S RNG 210E MER S

Company Permit Issued to: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date Original Permit Issued: 5/23/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

Approved by the Utah Division of Oil, Gas and Mining

Signature: Danielle Piernot

Date: 6/23/2009

Title: Regulatory Analyst Representing: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date: June 23, 2009

By: [Signature]



GARY R. HERBERT
Governor

GREGORY S. BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

May 24, 2010

43 047 39018
NBU 1021-29C
10S 21E 29

Kerr McGee O&G Onshore LP
1368 South 1200 East
Vernal, Utah 84078

Re: APDs Rescinded for Kerr McGee Oil & Gas Onshore LP Uintah County

Ladies and Gentlemen:

Enclosed find the list of APDs that are being rescinded to Kerr McGee Oil & Gas Onshore LP. No drilling activities at these locations have been reported to the division. Therefore, approval to drill these wells is hereby rescinded, effective May 24, 2010.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
SITLA, Ed Bonner



Natural Buttes Unit 1022-24I	43-047-39031
Natural Buttes Unit 1021-29L	43-047-39009
Natural Buttes Unit 1021-29O	43-047-39010
Natural Buttes Unit 1021-29N	43-047-39011
Natural Buttes Unit 1021-29J	43-047-39012
Natural Buttes Unit 1021-29K	43-047-39013
Natural Buttes Unit 1021-29G	43-047-39015
Natural Buttes Unit 1021-29F	43-047-39016
Natural Buttes Unit 1021-29E	43-047-39017
Natural Buttes Unit 1021-29C	43-047-39018
Natural Buttes Unit 1021-29A	43-047-39019
Natural Buttes Unit 1021-29P	43-047-39110