

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT
(highlight changes)

APPLICATION FOR PERMIT TO DRILL

5. MINERAL LEASE NO: ML-47969		6. SURFACE: State
7A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>		7. IF INDIAN, ALLOTTEE OR TRIBE NAME:
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>		8. UNIT or CA AGREEMENT NAME:
2. NAME OF OPERATOR: The Houston Exploration Company		9. WELL NAME and NUMBER: North Horseshoe 16-9-6-22
3. ADDRESS OF OPERATOR: 1100 Louisiana Suite 20 CITY Houston STATE TX ZIP 77002		10. FIELD AND POOL, OR WILDCAT: Undesignated <i>Wildcat</i>
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 704' FSL & 649' FEL <i>632594X 40.308504</i> AT PROPOSED PRODUCING ZONE: Same as above <i>4462957Y -109.43676</i>		11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 9 6S 22E
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 14.25 miles south of Vernal, UT		12. COUNTY: Uintah 13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 649'	16. NUMBER OF ACRES IN LEASE: 2,240 Acres	17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 40 Acres
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) 1,300'	19. PROPOSED DEPTH: <i>9345</i> 9,401	20. BOND DESCRIPTION: 104155044
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 4,743' GR	22. APPROXIMATE DATE WORK WILL START: 7/1/2007	23. ESTIMATED DURATION: 30 Days


PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT			SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT		
11"	8 5/8	J-55	36#	2,000	Premium Lite II	250 sks	3.38cf 11.0ppg
					Class "G"	329 sks	1.2cf 15.6ppg
					Calcium Chloride	200 sks	1.1cf 15.6ppg
7 7/8	4 1/2	N-80	11.6#	<i>9345</i> 9,401	Premium Lite II	415 sks	3.3cf 11.0ppg
					Class "G"	515 sks	1.56cf 14.3ppg

ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:

- | | |
|---|--|
| <input type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER | <input type="checkbox"/> COMPLETE DRILLING PLAN |
| <input type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER | <input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER |


NAME (PLEASE PRINT) William A. Ryan TITLE Agent
 SIGNATURE  DATE 4/23/2007

**Approved by the
Utah Division of
Oil, Gas and Mining**

RECEIVED

APR 30 2007

API NUMBER ASSIGNED: 43-047-39083

Date: APR 16 2007
By: 

DIV. OF OIL, GAS & MINING

T6S, R22E, S.L.B.&M.



THE HOUSTON EXPLORATION COMPANY

S89°06'W - 5319.60' (G.L.O.)

Well location, NORTH HORSESHOE #16-9-6-22, located as shown in the SE 1/4 SE 1/4 of Section 9, T6S, R22E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

SPOT ELEVATION AT A HILLTOP LOCATED IN THE SW 1/4 OF SECTION 11, T6S, R22E, S.L.B.&M. TAKEN FROM THE RASMUSSEN HOLLOW QUADRANGLE, UTAH, UTAH COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4993 FEET.

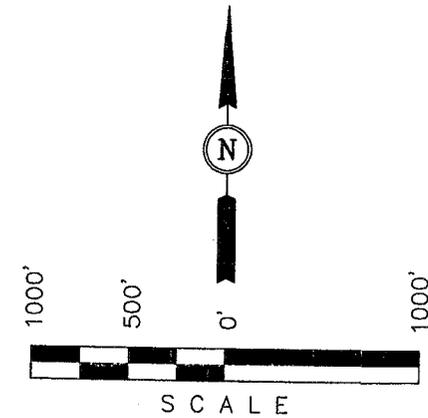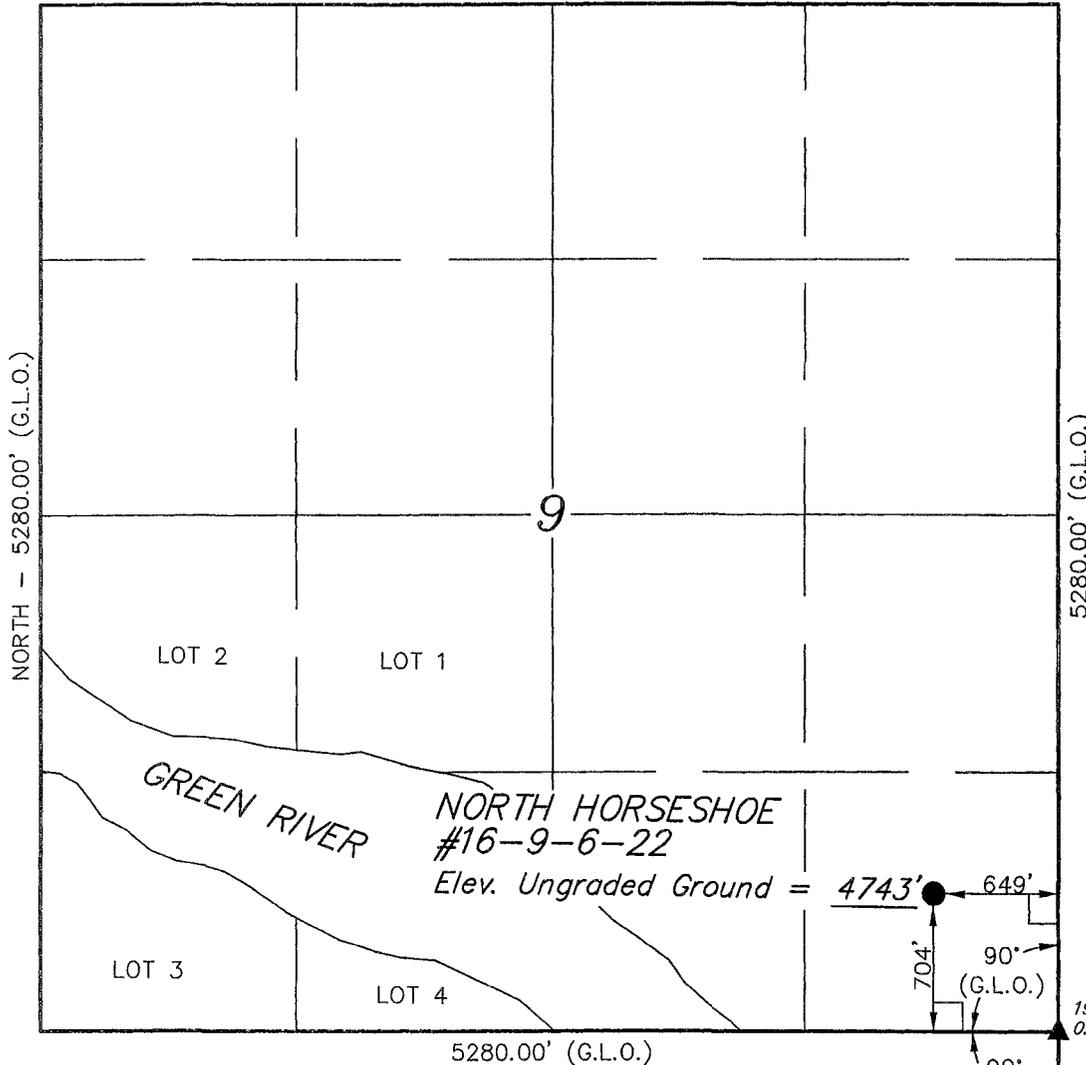

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

[Signature]

REGISTERED LAND SURVEYOR
REGISTRATION NO. 161319
STATE OF UTAH

BASIS OF BEARINGS
BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

(AUTONOMOUS NAD 83)

LATITUDE = 40°18'27.66" (40.307683)
LONGITUDE = 109°26'25.74" (109.440483)

(AUTONOMOUS NAD 27)

LATITUDE = 40°18'27.79" (40.307719)
LONGITUDE = 109°26'23.26" (109.439794)

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

1970 Brass Cap,
0.4' High, T-Post

5003°40'7"E
2594.72' (Meas.)
W 1/4 Sec. 15
1967 Brass Cap,
0.3' High, Pile
of Stones

UINTAH ENGINEERING & LAND SURVEYING

85 SOUTH 200 EAST - VERNAL, UTAH 84078

(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 08-03-05	DATE DRAWN: 08-10-05
PARTY N.H. D.M. L.K.	REFERENCES G.L.O. PLAT	
WEATHER HOT	FILE THE HOUSTON EXPLORATION COMPANY	

Ten Point Plan

The Houston Exploration Company

North Horseshoe 16-9-6-22

Surface Location SE ¼ SE ¼, Section 9, T. 6S., R. 22E.

1. Surface Formation

Green River

2. Estimated Formation Tops and Datum:

<u>Formation</u>	<u>Depth</u>	<u>Datum</u>
GR	Surface	4,743'
KB	+12'	4,755'
Green River	3,645'	+1,110'
Wasatch	6,745'	-1,990'
Mesaverda	9,345'	-4,590'TD

A 11" hole will be drilled to 2,000' +/- . The hole depth will depend on the depth that the Birds Nest Zone is encountered. The hole will be drilled 400' beyond the top of the Birds Nest.

3. Producing Formation Depth:

Formation objective includes the Green River, Wasatch, Mesaverde and its sub-members.

Off set well information

Permitted/Drilled:

North Horseshoe #2-15-6-22

North Horseshoe #4-15-6-22

North Horseshoe #14-10-6-22

Abandoned Wells:

N #2

4. Proposed Casing:

<u>Hole Size</u>	<u>Casing Size</u>	<u>Weight/FT</u>	<u>Grade</u>	<u>Coupling & Tread</u>	<u>Casing Depth</u>	<u>New/Used</u>
11	8 5/8	36#	J-55	STC	2000	NEW
7 7/8	4 1/2	11.6#	N-80	LTC	T.D.	NEW

Cement Program:

The Surface Casing will be cemented to the Surface as follows:

	<u>Casing Size</u>	<u>Cement Type</u>	<u>Cement Amounts</u>	<u>Cement Yield</u>	<u>Cement Weight</u>
Lead:	8 5/8	Premium Lite II .05#/sk Static Free .25#/sk Cello Flake 5#/sk KOL Seal .002 gps FP-6L 10% Bentonite .5% Sodium Metasilicate 3% Potassium Chloride	250 sks. +/-	3.38ft ³ /sk	11.0 ppg
Tail:	8 5/8	Class "G" 2% Calcium Chloride .25#/sk Cello Flake	329 sks. +/-	1.2ft ³ /sk	15.6 ppg
Top Job:	8 5/8	4% Calcium Chloride .25#/sk Cello Flake	200 sks. +/-	1.10ft ³ /sk	15.6 ppg

Production casing will be cemented to 2,500' or higher as follows:

	<u>Casing Size</u>	<u>Cement Type</u>	<u>Cement Amounts</u>	<u>Cement Yield</u>	<u>Cement Weight</u>
Lead:	4 1/2	Premium Lite II .25#/sk Cello Flake .05#/sk Static Free 5#/sk Kol Seal 3% Potassium Chloride .055 gps FP-6L 10% Bentonite .5 Sodium Metasilicate	415 sks +/-	3.3ft ³ /sk	11.0 ppg
Tail:	4 1/2	Class "G" .05% Static Free 2 Sodium Chloride .1% R-3 2% Bentonite	515 sks +/-	1.56ft ³ /sk	14.3 ppg

5. BOP and Pressure Containment Data:

The anticipated bottom hole pressure will be less than 3000 psi.

A 3000-psi WP BOP system as described in the BOP and Pressure Containment Data (attached) will be installed and maintained from the 8 5/8" surface casing. The BOP system including the casing will be pressure tested to minimum standards set forth in "On Shore Order #2". The BOP will be mechanically checked daily during the drilling operation.

6. Mud Program:

<u>Interval</u>	<u>Mud weight lbs./gal.</u>	<u>Viscosity Sec./OT.</u>	<u>Fluid Loss Ml/30 Mins.</u>	<u>Mud Type</u>
0-2000	Air/Clear Water	-----	No Control	Water/Gel
2000-T.D.	8.4-12.0	30	8-10	Water/Gel

7. Auxiliary Equipment

Upper Kelly cock, full opening stabbing valve, 2 ½" choke manifold and pit level indicator.

8. Testing, Coring, Sampling and Logging:

- a) Test: None are anticipated.
- b) Coring: There is the possibility of sidewall coring.
- c) Sampling: Every 10' from 2000' to T.D.
- d) Logging:

Type	Interval
DLL/SFL W/GR and SP	T.D. to Surf. Csg
FDC/CNL W/GR and CAL	T.D. to Surf. Csg

9. Abnormalities (including sour gas):


No abnormal pressures, temperatures or other hazards are anticipated. Oil and gas shows are anticipated in the Wasatch Formation. Other wells drilled in the area have not encountered over pressured zones or H2S.

10. Drilling Schedule:


The anticipated starting date is 3/05/2007 Duration of operations is expected to be 30 days.

THE HOUSTON EXPLORATION COMPANY


TYPICAL 3,000 p.s.i. BLOWOUT PREVENTER SCHEMATIC

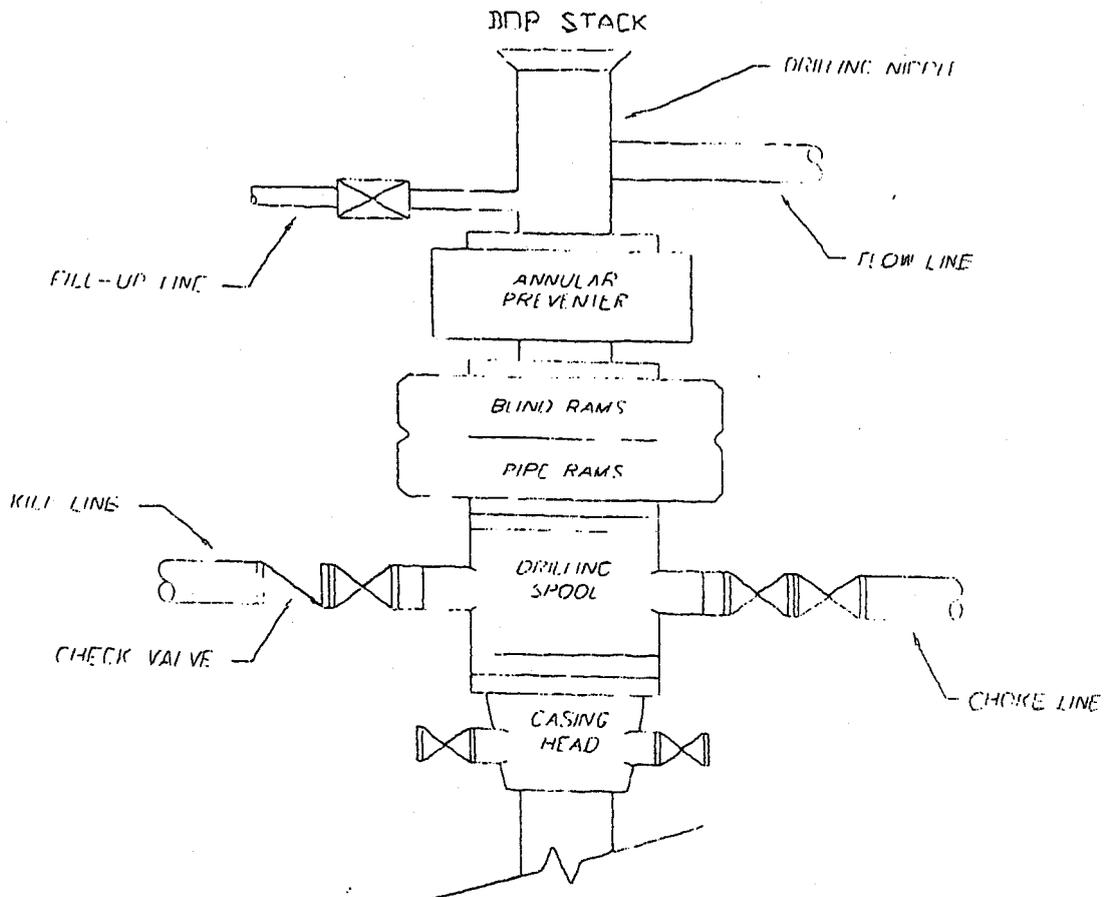

TYPICAL 3,000 p.s.i. CHOKE MANIFOLD SCHEMATIC

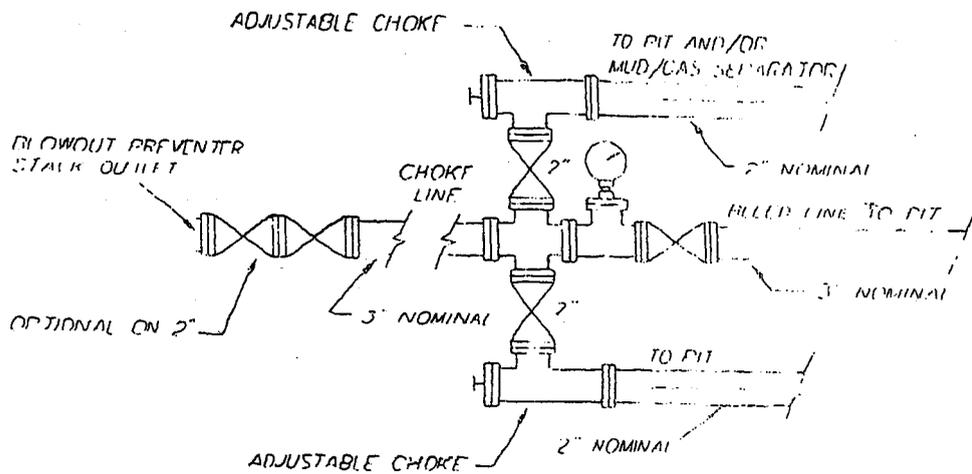

TYPICAL
CUMWELL

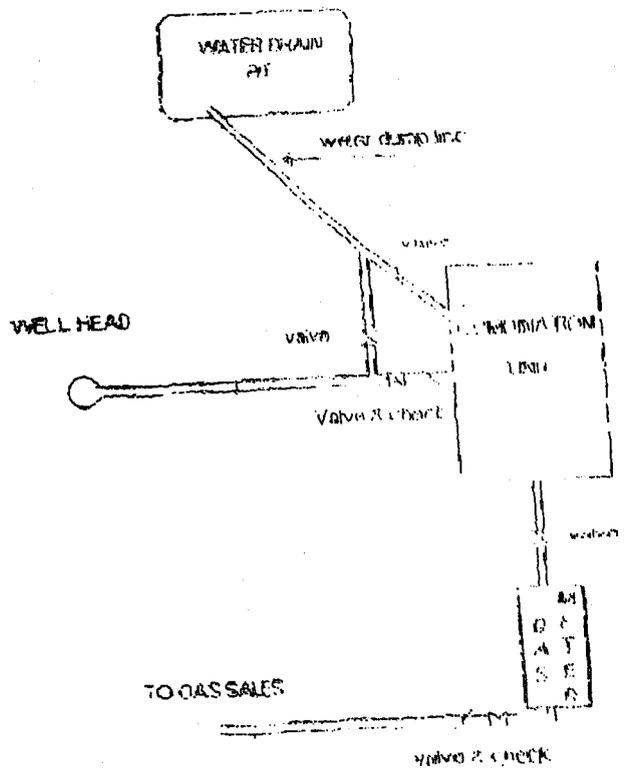

THE HOUSTON EXPLORATION COMPANY

13 POINT SURFACE USE PLAN

FOR WELL

NORTH HORSESHOE 16-9-6-22

LOCATED IN SE $\frac{1}{4}$ SE $\frac{1}{4}$

SECTION 9, T. 6S, R22E, S.L.B.&M.

UINTAH COUNTY, UTAH

LEASE NUMBER: ML-47969

SURFACE OWNERSHIP: STATE

1. Existing Roads:

To reach The Houston Exploration Co. well North Horseshoe 16-9-6-22 in Section 9, T6S, R 22E, Starting in Vernal, Utah.

Proceed in an easterly, then southerly direction from Vernal, Utah along U.S. Highway 40 approximately 3.9 miles to the junction of this road and State Highway 45; exit right and proceed in a southerly, then southeasterly direction approximately 5.2 miles on State Highway 45 to the junction of this road and an existing road to the southeast, turn left and proceed in a southeasterly, then southerly direction approximately 4.5 miles to the beginning of the proposed access for the 14-10-6-22 to the west; follow road flags in a westerly direction approximately 0.15 miles to the proposed 14-10-6-22 and the beginning of the proposed access for the 16-9-6-22 to the west; follow road flags in a westerly direction approximately 0.5 miles to the proposed location.

Total distance from Vernal, Utah to the proposed well location is approximately 14.25 miles.

All existing roads to the proposed location are State of Utah, BLM maintained or County Class D roads. Please see the attached map for additional details.

2. Planned access road

The proposed access road will be approximately 2,640' +/- of new

construction on lease. The road will be graded once per year minimum and maintained.

- A) Approximate length 2640 ft
 - B) Right of Way width 30 ft
 - C) Running surface 18 ft
 - D) Surface material Native soil
 - E) Maximum grade 5%
 - F) Fence crossing None
 - G) Culvert None
 - H) Turnouts None
 - I) Major cuts and fills None
 - J) Road Flagged Yes
 - K) Access road surface ownership State
 - L) All new construction on lease Yes
 - M) Pipe line crossing None
- Please see the attached location plat for additional details.

An off lease right-of-way will not be required.

All surface disturbances for the road and location will be within the lease boundary.

3. Location of existing wells

The following wells are located within a one-mile radius of the location site.

- A) Producing well None
- B) Water well None
- C) Abandoned well N #2
- D) Temp. abandoned well None
- E) Disposal well None
- F) Drilling /Permitted well North Horseshoe 2-15-6-22 North Horseshoe 4-15-6-22 North Horseshoe 14-10-6-22
- G) Shut in wells None
- H) Injection well None
- I) Monitoring or observation well

None

Please see the attached map for additional details.

4. Location of tank batteries, production facilities and production gathering service lines.

All production facilities are to be contained within the proposed location site. Please see the attached plat plan for a typical gas well separator installation and well site piping.

All permanent (on site for more than six months or longer) structures constructed or installed will be painted an **Carlsbad Canyon** color. Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded. The required paint color is **Carlsbad Canyon**.

All tanks will be surrounded by a dike of sufficient capacity to contain the storage capacity of the largest tank in the battery. The integrity of the dike will be maintained.

The operator will adhere to all site security guidelines and regulation identified in 43 cfr 3126.7.

All off lease storage, off lease measurement, commingling on lease or off lease, of production, will have prior written approval from the authorized officer.

If the well is capable of economic production a surface gas line will be required.

Approximately 2,514' +/- of 3" steel surface gas gathering line would be constructed on State Lands. The line will tie into the proposed pipeline in Section 10, T6S, R22E. The pipeline would be strung and boomed to the northeast of the location. The pipeline may be buried as determined by the Authorized Officer at the onsite.

An off lease right-of-way will not be required.

Please see the attached location diagrams for pipeline location.

The gas meter run will be located within 500' of the wellhead. The gas line will be buried or anchored down from the wellhead to the meter. Meter runs will be housed and/or fenced.

The gas meter will be calibrated and the tank strapped in place prior to any deliveries. Tests for meter accuracy will be conducted monthly for the first three months on new meter installations and at least quarterly thereafter. The authorized officer will be provided with a date and time for the initial meter calibration and all future meter-proving schedules. A copy of the meter calibration report will be submitted to the BLM's Vernal District office and State of Utah, Division of Oil, Gas, and Mining. All measurement facilities will conform to API (American Petroleum Institute) and AGA (American Gas Association) standards for gas and liquid hydrocarbon measurement.

5. Location and type of water supply

Water for drilling and cementing will come from The Green River in Permit # T-76073.

6. Source of construction materials

All construction material for this location site and access road shall be borrow material accumulated during construction of the location site and access road. Additional road gravel or pit lining material will be obtained from private resources.

7. Methods for handling waste disposal

A) Pit construction and liners:

The reserve pit will be approximately **12 ft.** deep and most of the depth shall be below the surface of the existing ground. Please see the attached plat for details.

The reserve pit will be lined.

The reserve pit will be used to store water for drilling. A semi-closed system will be used to drill the well. All fresh water for drilling will come from a frac tank placed on location and from the rig tank. The pit will be used to hold non-flammable materials such as cuttings, salt, drilling fluids, chemicals, produced fluids, etc.

B) Produced fluids:

Produced water will be confined to the reserve pit, or if deemed necessary, a storage tank for a period not to exceed 90 days after initial production. During the 90-day period an application for approval for permanent disposal method and location will be submitted to the authorized officer. **Evaporation may be used instead of trucking to facilitate closing and reclamation of the reserve pit. A pumping system would be used for evaporation.**

C) Garbage:

A trash cage fabricated from expanded metal will be used to hold trash on location and will be removed to an authorized landfill location.

D) Sewage:

A portable chemical toilet will be supplied for human waste.

E) Site clean-up:

After the rig is moved off the location the well site area will be cleaned and all refuse removed.

8. Ancillary facilities

There are no ancillary facilities planned at this time and none are foreseen for the future.

9. Well-site layout

Location dimensions are as follows:

- A) Pad length 345 ft.
- B) Pad width 245 ft.
- C) Pit depth 12 ft.
- D) Pit length 150 ft.
- E) Pit width 75 ft.
- F) Max cut 18.3 ft.
- G) Max fill 7.2 ft.
- H) Total cut yds. 8,130 cu yds
- I) Pit location East side
- J) Top soil location West end
- K) Access road location North end
- L) Flare Pit corner C

Please see the attached location diagram for additional details.

All pits will be fenced according to the following minimum standards:

- A) Thirty nine inch net wire shall be used with at least one strand of wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.
- B) The net wire shall be no more than 2 inches above the ground. The barbed wire shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C) Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

- D) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 ft.
- E) All wire shall be stretched by using a stretching device before it is attached to the corner posts.

10. Plans for restoration of the surface

Prior to construction of the location, the top 6 inches of soil material will be stripped off the location and the pit area. The topsoil removed and piled will amount to approximately 1,660 cubic yards of material.

Topsoil will be stockpiled in one distinct pile. Placement of the topsoil is noted on the attached location plat. The topsoil pile from the location will be seeded as soon as the soil is stock piled with the seed mix listed. When all drilling and completion activities have been completed and the pit back-filled the topsoil from the pit area will be spread on the pit area. The pit area will be seeded when the soil has been spread. The unused portion of the location (the area outside the dead men) will be re-contoured.

The dirt contractor will be provided with an approved copy of the surface use plan prior to construction activities.

Changes to the drainage during the construction activities shall be restored to its original line of flow or as near as possible when the pit is back-filled

All disturbed areas will be re-contoured to the approximate natural contours. Prior to back filling the pit the fences around the reserve pit will be removed.

The reserve pit will be reclaimed within 90 days of well completion. If the reserve pit has not dried sufficiently to allow back filling, an extension on the time requirement for back filling the pit will be requested. Once reclamation activities have begun, they shall be completed within 30 days.

After the reserve pit has been reclaimed, no depressions in the soil covering the reserve pit will be allowed. The objective is to keep seasonal rainfall and run off from seeping into the soil used to cover the reserve pit. Diversion ditches and water bars will be used to divert the run off as needed.

When restoration activities have been completed, the location site and new access road cuts and shoulders shall be reseeded. Prior to reseeding, all disturbed areas will be scarified and left with a rough surface.

A) Seeding dates:

Seed will be spread when topsoil is stock piled and when reclamation work is performed.

The seed mix and quantity list will be used whether the seed is broadcast or drilled.

B) Seed Mix

To be determined by the Authorized Officer.

11. Surface ownership:

Access road	State
Location	State
Pipe line	State

12. Other information:

A) Vegetation

The vegetation coverage is Slight. The majority of the existing vegetation consists of non-native species. Rabbit brush, bitter brush, and Indian Rice grass and Sagebrush are also found on the location.

B) Dwellings:

There are no dwelling or other facilities within a one-mile radius of the location.

C) Archeology:

The location has been surveyed. A copy of that survey will be forwarded to your office.

If, during operations, any archaeological or historical sites, or any objects of antiquity (subject to the antiquities act of June 8, 1906) are discovered, all operations, which would affect such sites, will be suspended and the discovery reported

promptly to the surface management agency.

been off production for more than 90 days.

D) Water:

The nearest water is the Green River located 600' to the South.

E) Chemicals:

No pesticides, herbicides or other possible hazardous chemicals will be used without prior application.

F) Notification:

- a) Location Construction
At least forty eight (48) hours prior to construction of location and access roads.
- b) Location completion
Prior to moving on the drilling rig.
- c) Spud notice
At least twenty-four (24) hours prior to spudding the well.
- d) Casing string and cementing
At least twenty-four (24) hours prior to running casing and cementing all casing strings.
- e) BOP and related equipment tests
At least twenty-four (24) hours prior to initial pressure tests.
- f) First production notice
Within five (5) business days after the new well begins, or production resumes after well has

G) Flare pit:

The flare pit will be located in **corner C** of the reserve pit outside the pit fences and 100 feet from the bore hole on the east side of the location. All fluids will be removed from the pit within 48 hours of occurrence.

13. Lessees or Operator's representative and certification

A) Representative

William A. Ryan
Rocky Mountain Consulting
290 S 800 E
Vernal, UT 84078

Office 435-789-0968
Fax 435-789-0970
Cellular 435-828-0968

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, onshore oil and gas orders, and any applicable notices to lessees. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance.


This drilling permit will be valid for a period of one year from the date of approval. After permit termination, a new

application will be filed for approval for any future operations.

B) Certification:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill-site and access route that I am familiar with the conditions which presently exist, that the statements made in this plan are, to the best of my knowledge and belief, true and correct, and that the work associated with the operation proposed herein will be performed by The Houston Exploration Company and its contractors and subcontractors in conformity with this plan and terms and conditions with this plan and the terms and conditions under which it is approved.

Date 3/05/2007


William A. Ryan, Agent
Rocky Mountain Consulting

Onsite Dates:

Statement of use of Hazardous Materials

No chemical(s) from the EPA's consolidated list of Chemicals subject to Reporting under Title III of the Superfund Amendments and Reauthorization, Act (SARA) of 1986 will be used, produced, transported, stored, disposed, or associated with the proposed action. No extremely hazardous substances, as defined in 40 cfr 355, will be used, produced, stored, transported, disposed, or associated with the proposed action.

If you require additional information please contact:

William A Ryan
Agent for The Houston Exploration Company
Rocky Mountain Consulting
290 S 800 E
Vernal, UT 84078

435-789-0968 Office

435-828-0968 Cell

435-789-0970 Fax

THE HOUSTON EXPLORATION COMPANY

NORTH HORSESHOE #16-9-6-22

LOCATED IN UINTAH COUNTY, UTAH

SECTION 9, T6S, R22E, S.L.B.&M.

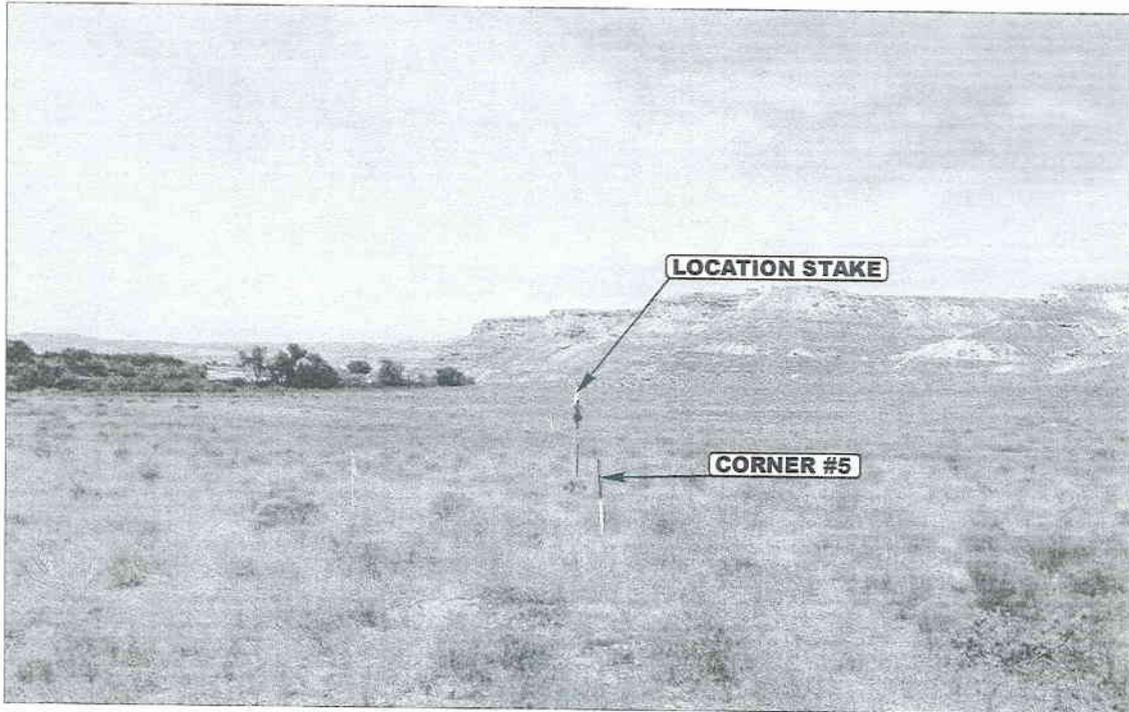


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY

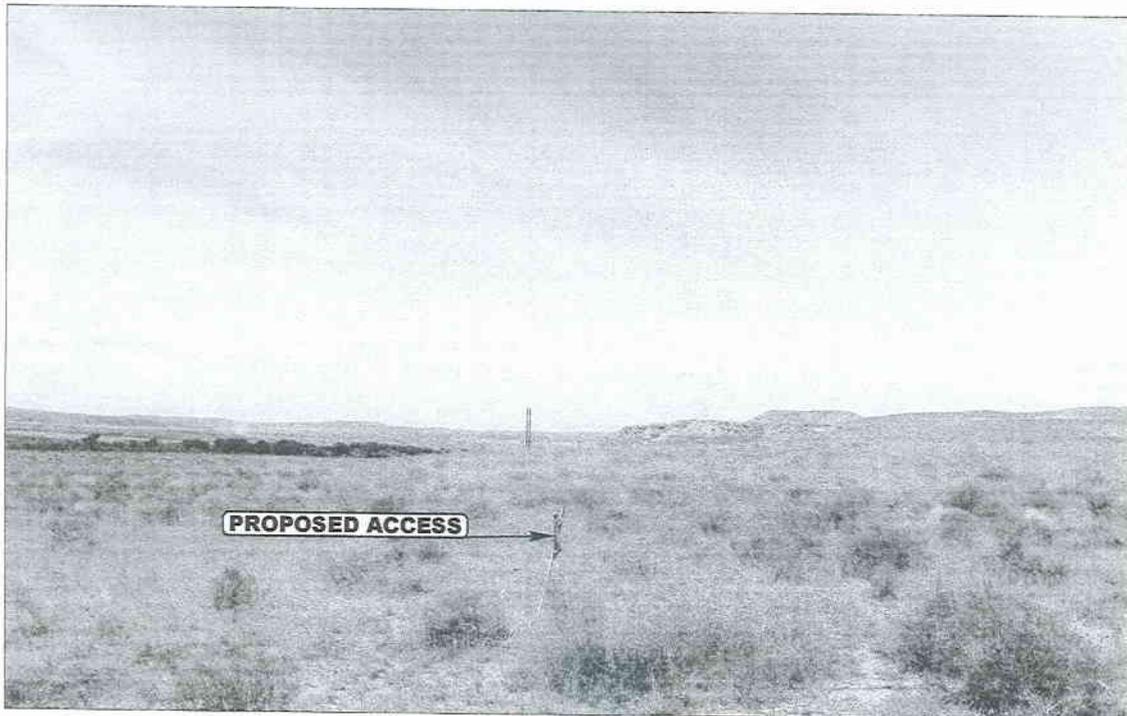


PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: WESTERLY



- Since 1964 -

Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

08 15 05
MONTH DAY YEAR

PHOTO


TAKEN BY: N.H. | DRAWN BY: C.P. | REVISED: 00-00-00

THE HOUSTON EXPLORATION COMPANY

FIGURE #1

LOCATION LAYOUT FOR


NORTH HORSESHOE #16-9-6-22
SECTION 9, T6S, R22E, S.L.B.&M.
704' FSL 649' FEL



SCALE: 1" = 50'
DATE: 08-10-05
Drawn By: L.K.

NOTE:

Flare Pit is to be located a min. of 100' from the Well Head.

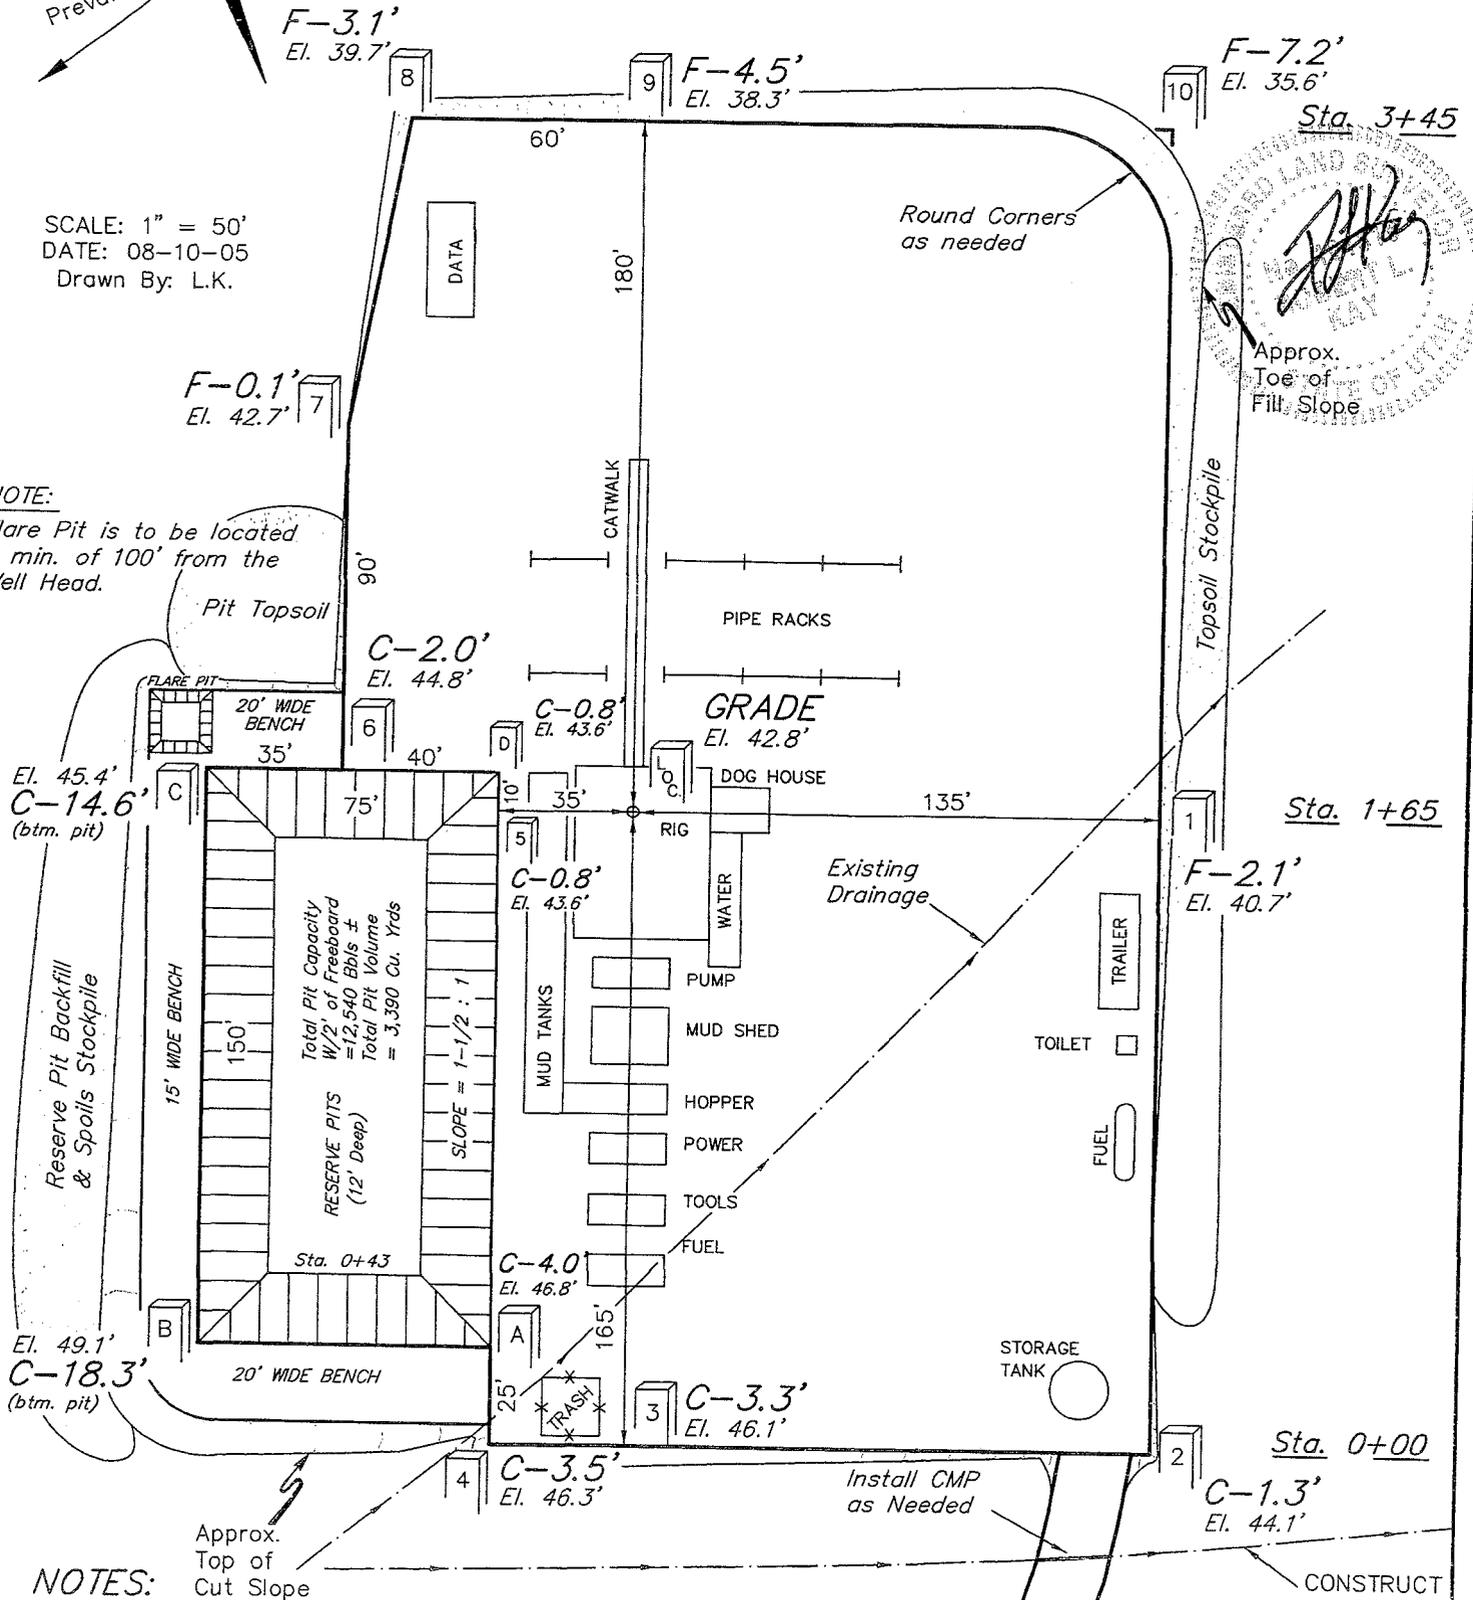

NOTES:

Elev. Ungraded Ground At Loc. Stake = 4742.8'
FINISHED GRADE ELEV. AT LOC. STAKE = 4742.8'

UNTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017






THE HOUSTON EXPLORATION COMPANY

FIGURE #2

TYPICAL CROSS SECTIONS FOR
 NORTH HORSESHOE #16-9-6-22
 SECTION 9, T6S, R22E, S.L.B.&M.
 704' FSL 649' FEL

1" = 20'
 X-Section
 Scale
 1" = 50'

DATE: 08-10-05
 Drawn By: L.K.

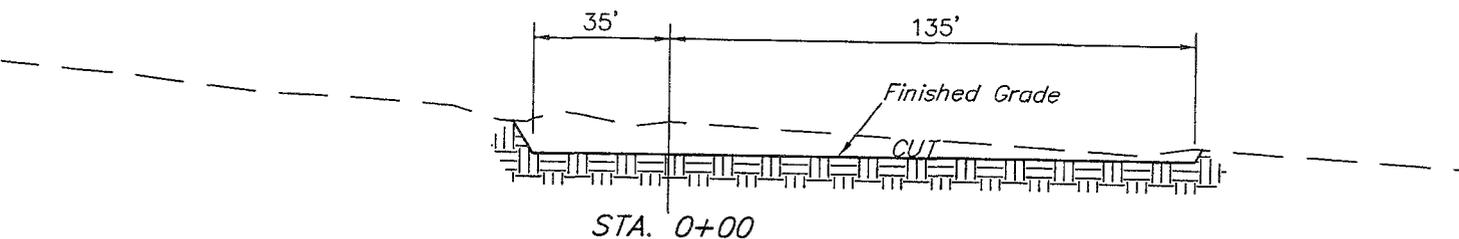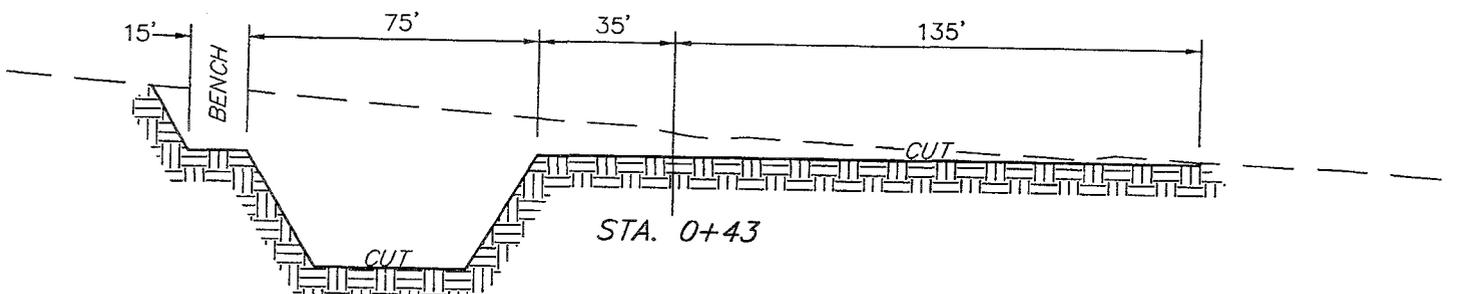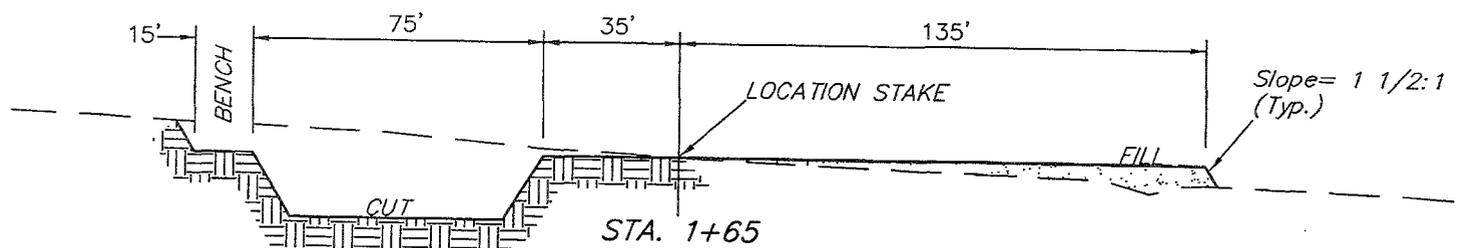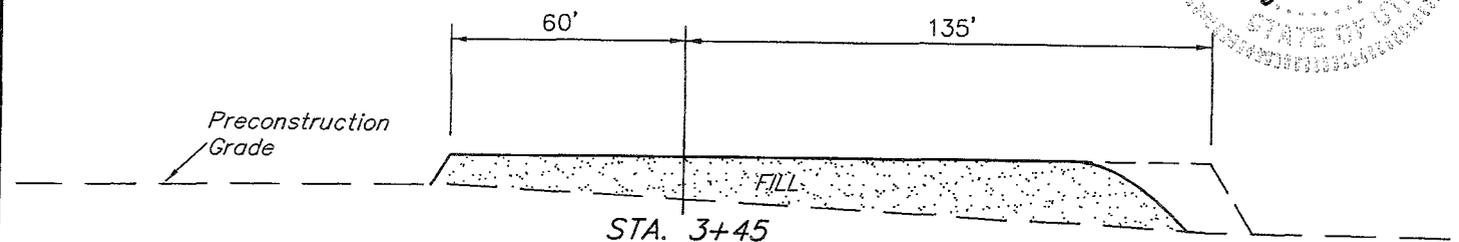


* NOTE:
 FILL QUANTITY INCLUDES
 5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT		
(6") Topsoil Stripping	=	1,660 Cu. Yds.
Remaining Location	=	6,470 Cu. Yds.
TOTAL CUT	=	8,130 CU.YDS.
FILL	=	4,770 CU.YDS.

EXCESS MATERIAL	=	3,360 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	=	3,360 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	=	0 Cu. Yds.

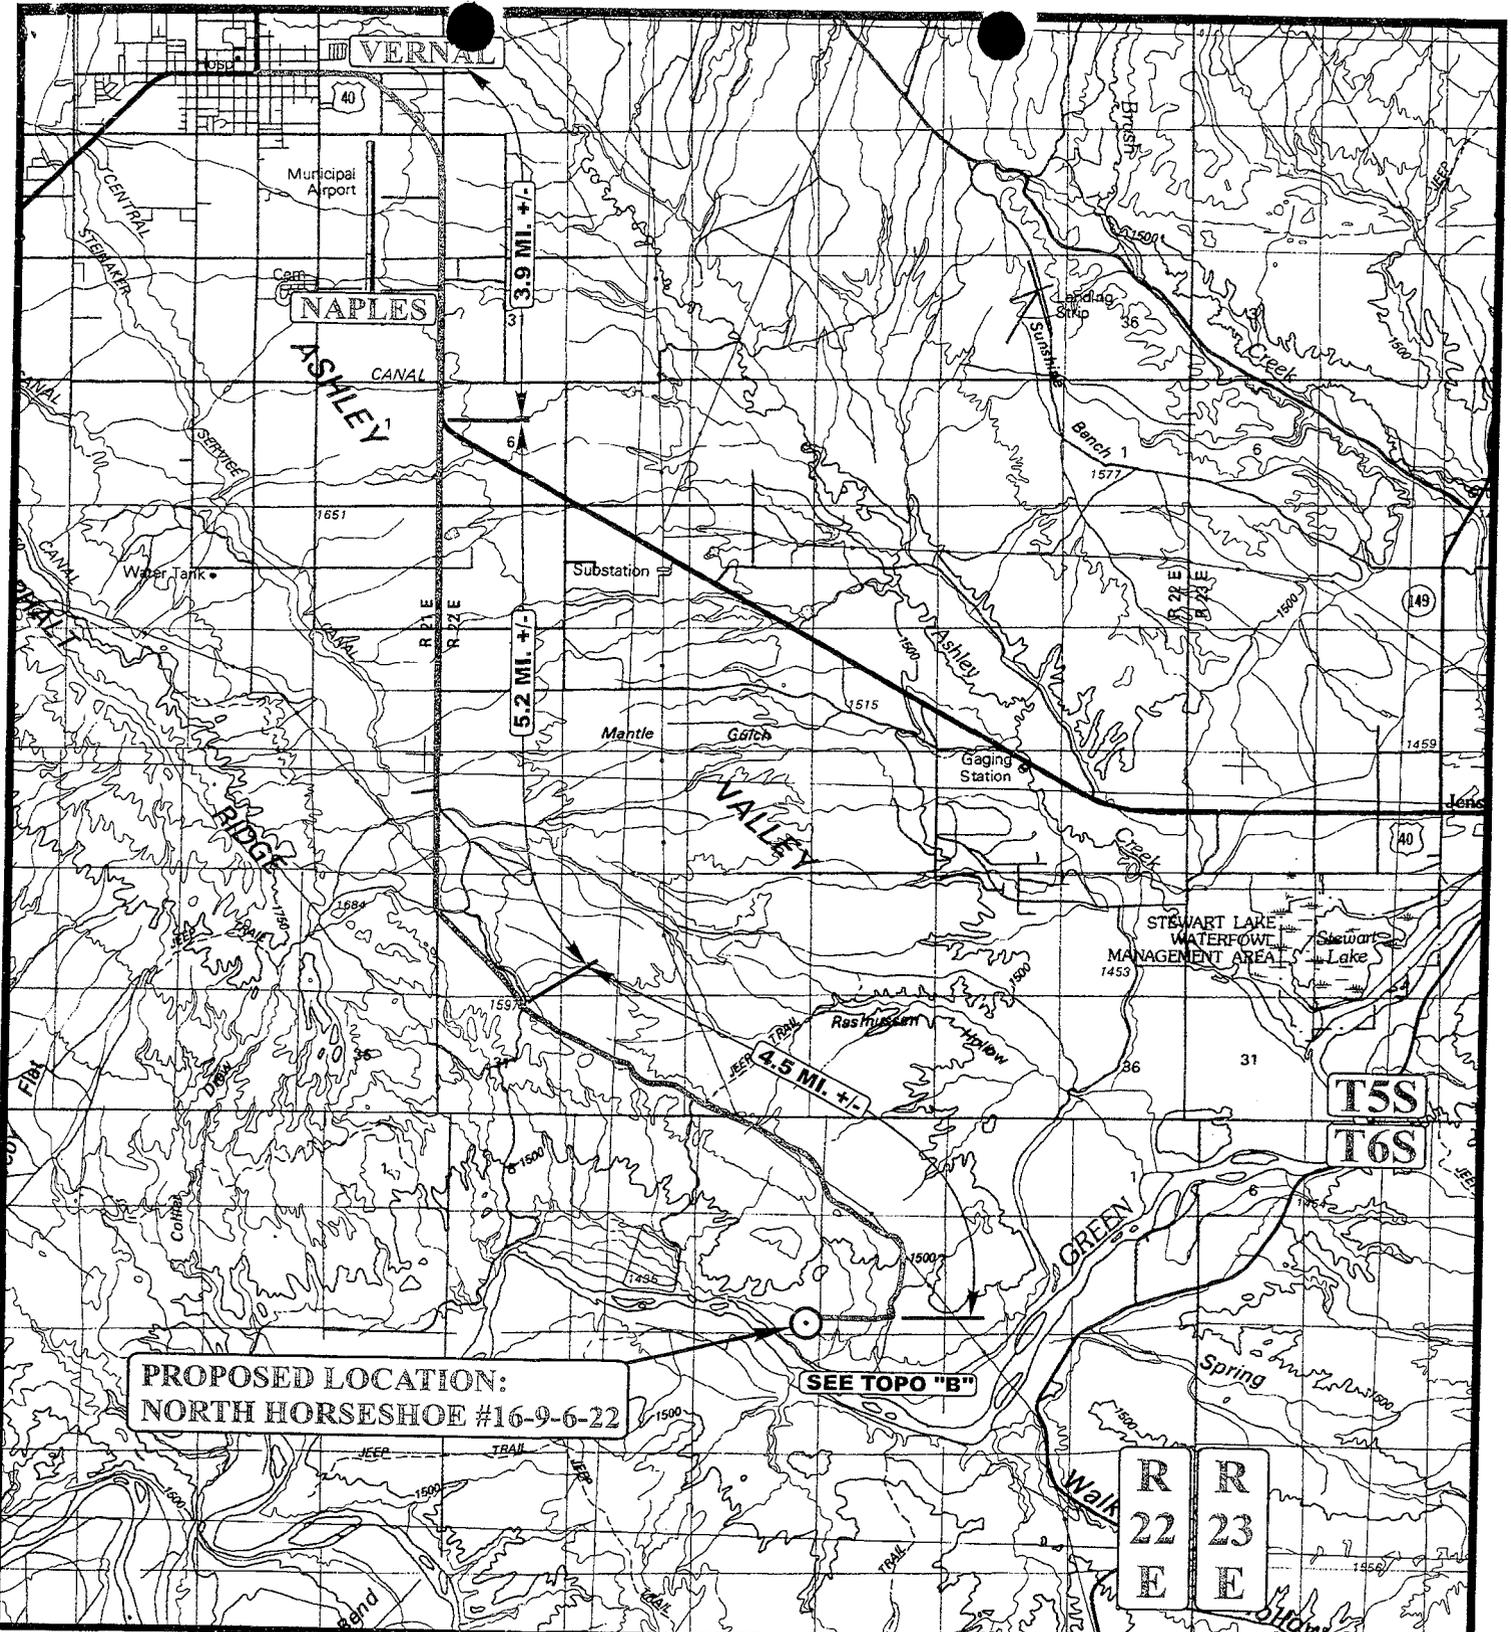

PROPOSED LOCATION:
 NORTH HORSESHOE #16-9-6-22

SEE TOPO "B"

R
22
E

R
23
E

LEGEND:

○ PROPOSED LOCATION

THE HOUSTON EXPLORATION COMPANY


NORTH HORSESHOE #16-9-6-22
 SECTION 9, T6S, R22E, S.L.B.&M.
 704' FSL 649' FEL

UES
 Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC 08 15 05
MAP MONTH DAY YEAR
 SCALE: 1:100,000 DRAWN BY: C.P. REVISED: 00-00-00



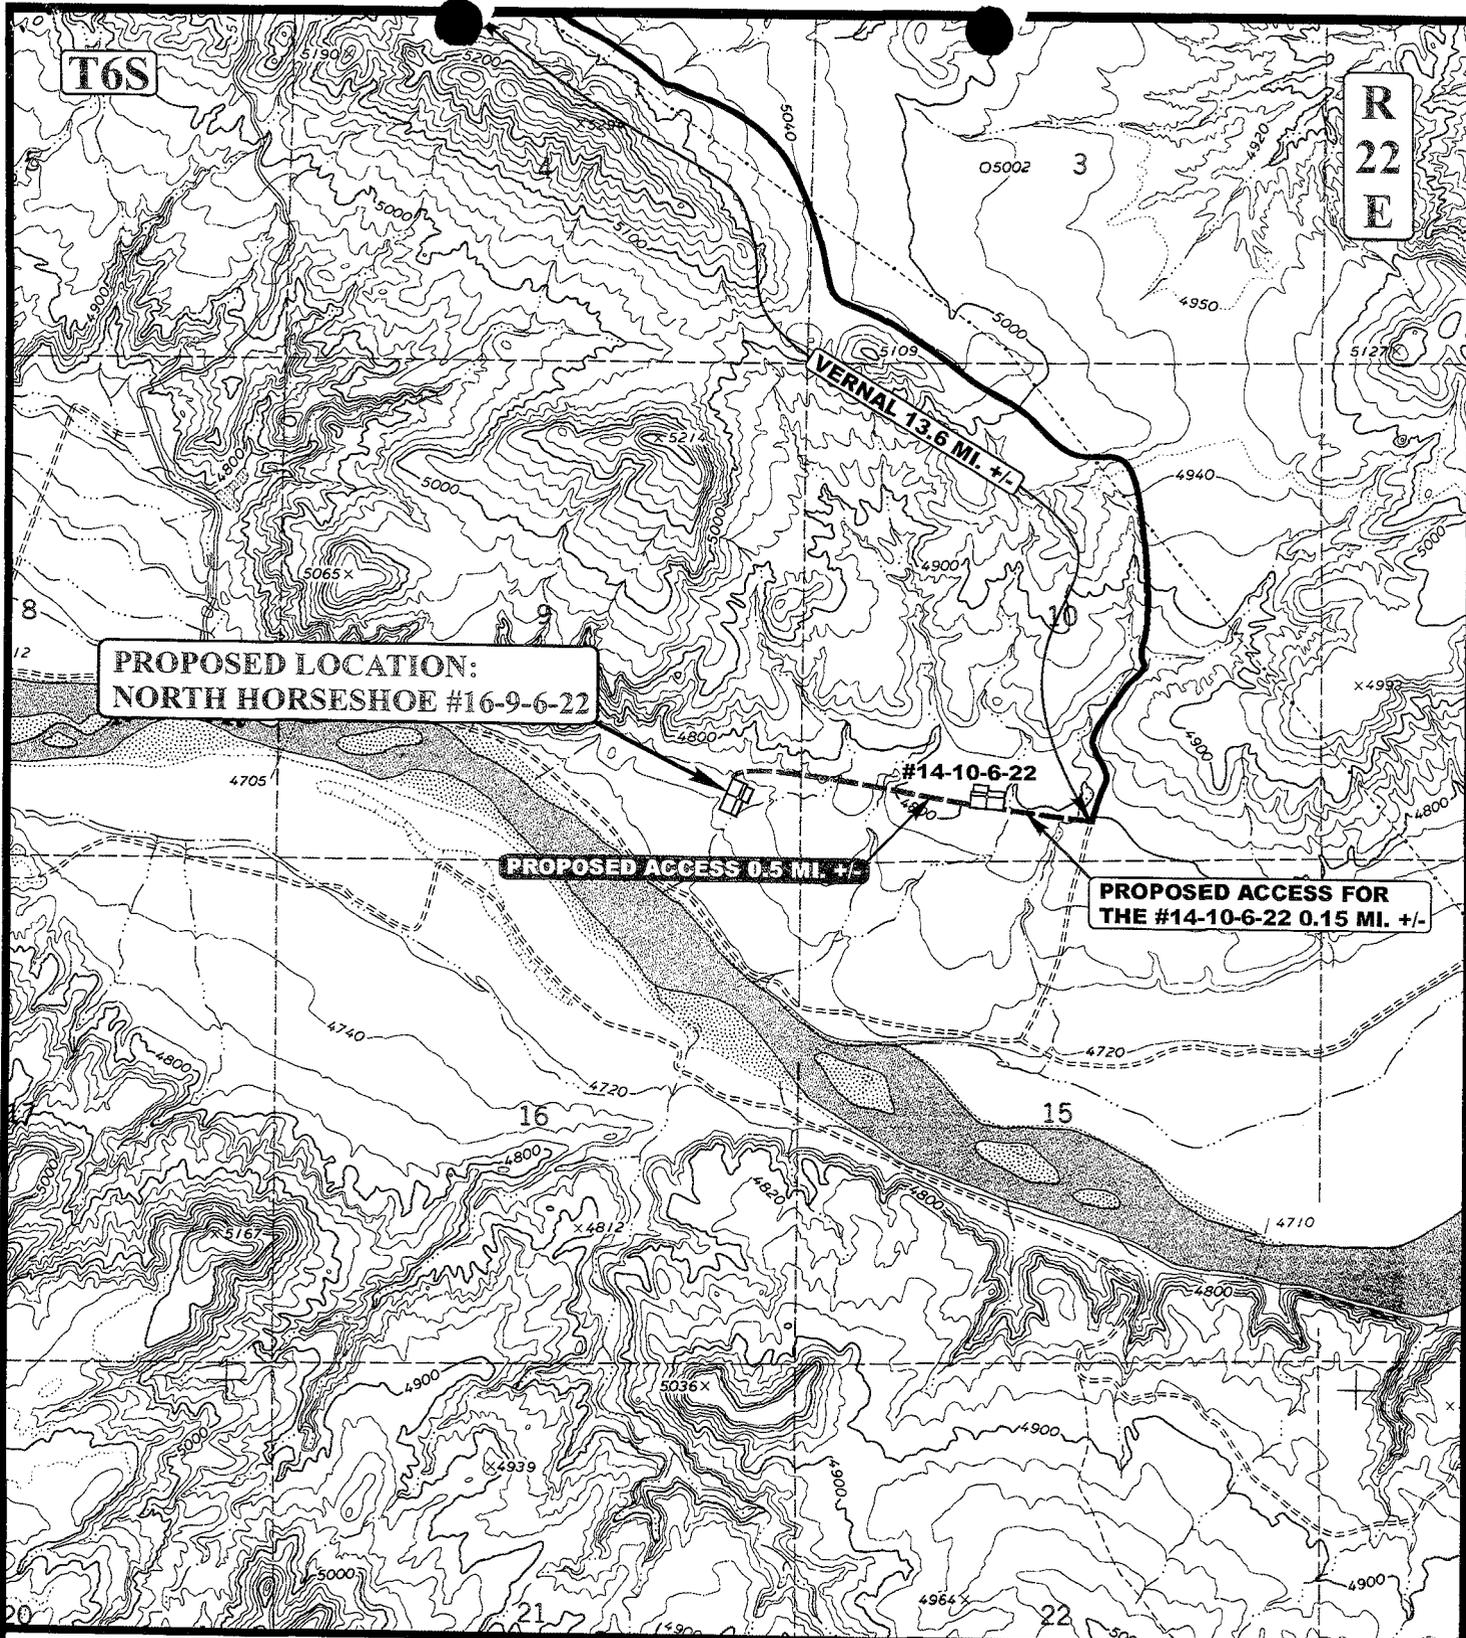

LEGEND:

- EXISTING ROAD
- - - - - PROPOSED ACCESS ROAD



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813




THE HOUSTON EXPLORATION COMPANY

NORTH HORSESHOE #16-9-6-22
 SECTION 9, T6S, R22E, S.L.B.&M.
 704' FSL 649' FEL

TOPOGRAPHIC 08 15 05
MAP MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00



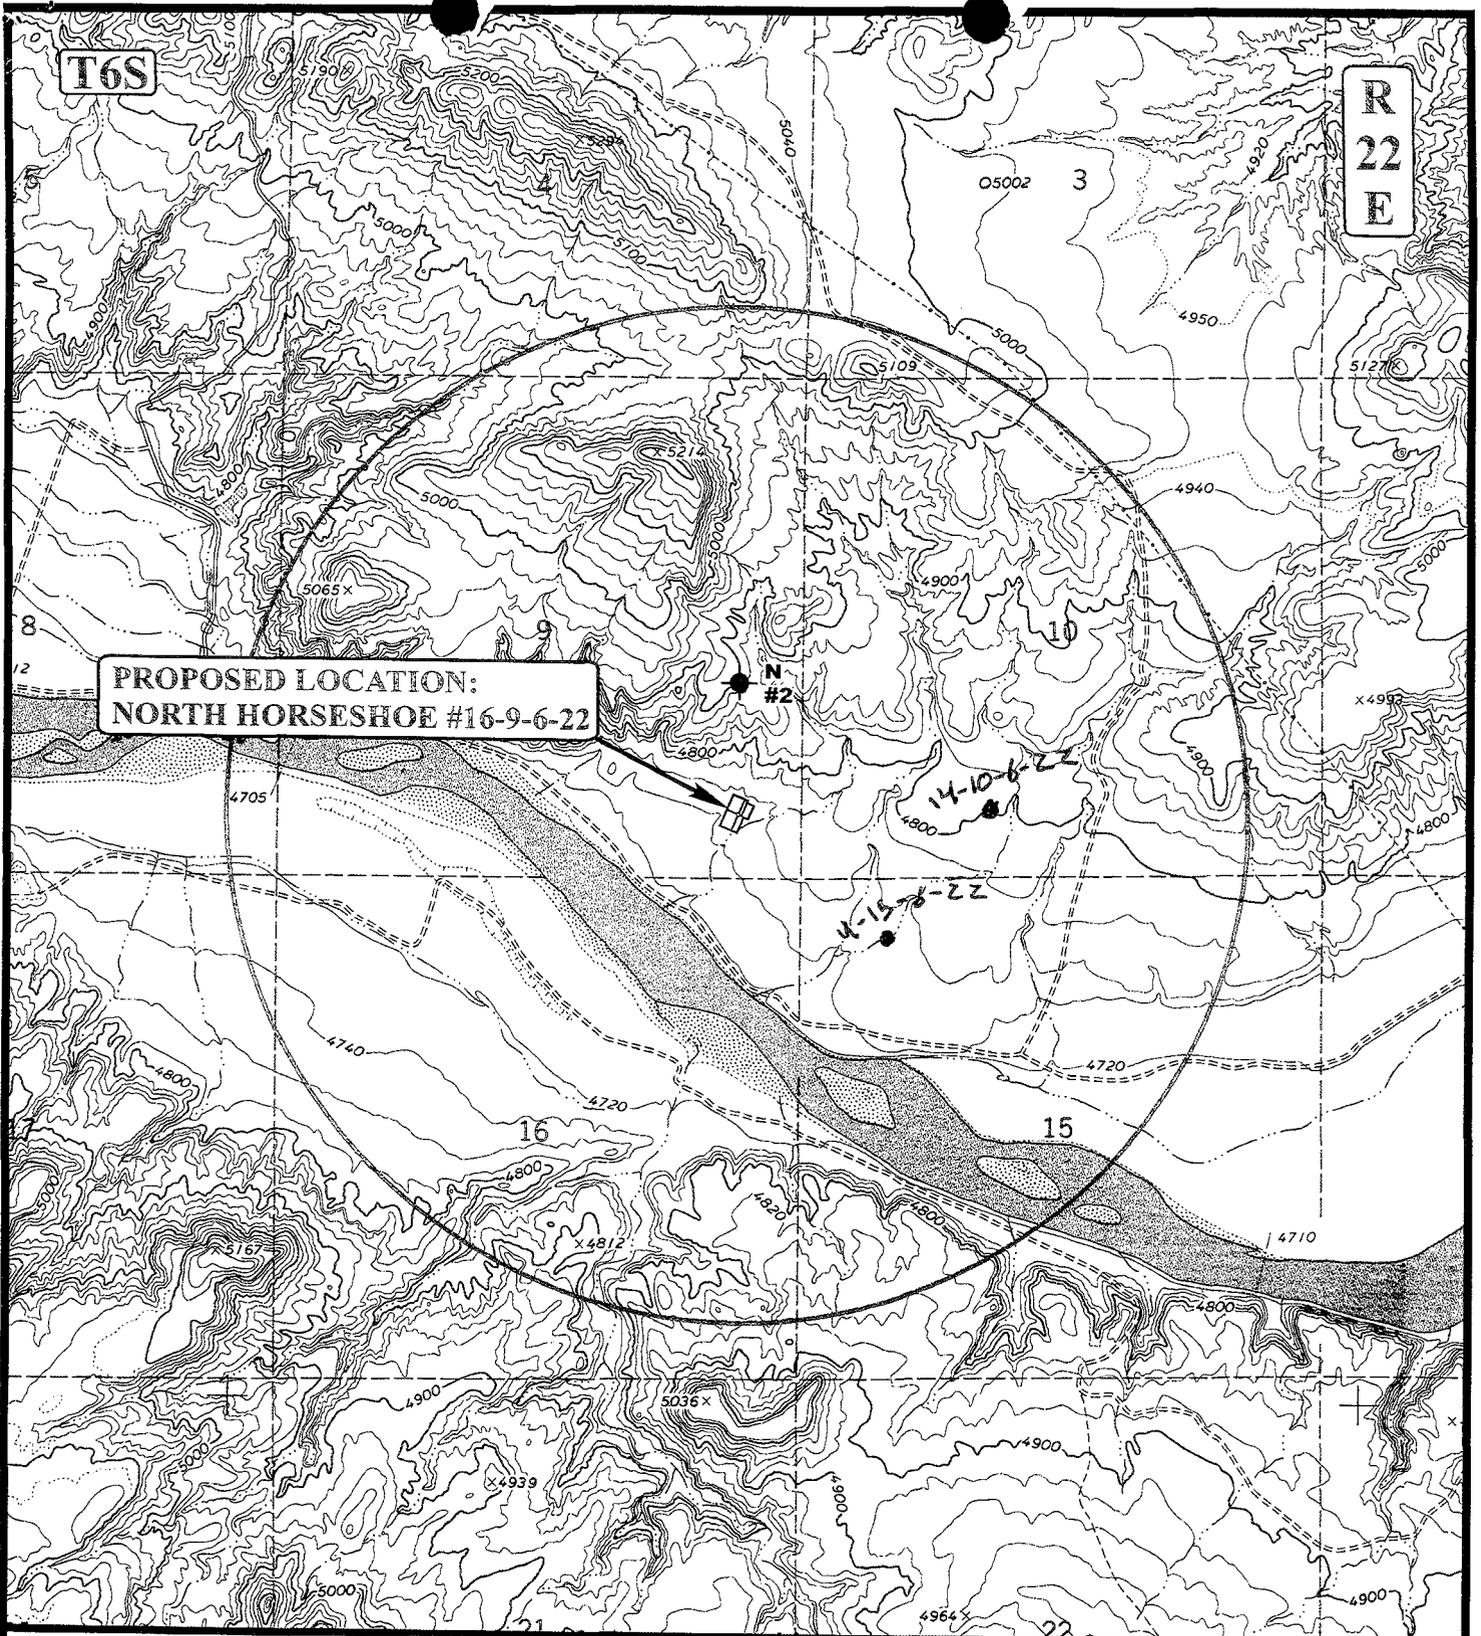

T6S

R
22
E

**PROPOSED LOCATION:
NORTH HORSESHOE #16-9-6-22**

LEGEND:

- DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED



THE HOUSTON EXPLORATION COMPANY


**NORTH HORSESHOE #16-9-6-22
SECTION 9, T6S, R22E, S.L.B.&M.
704' FSL 649' FEL**



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP 08 15 05
MONTH DAY YEAR
SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00



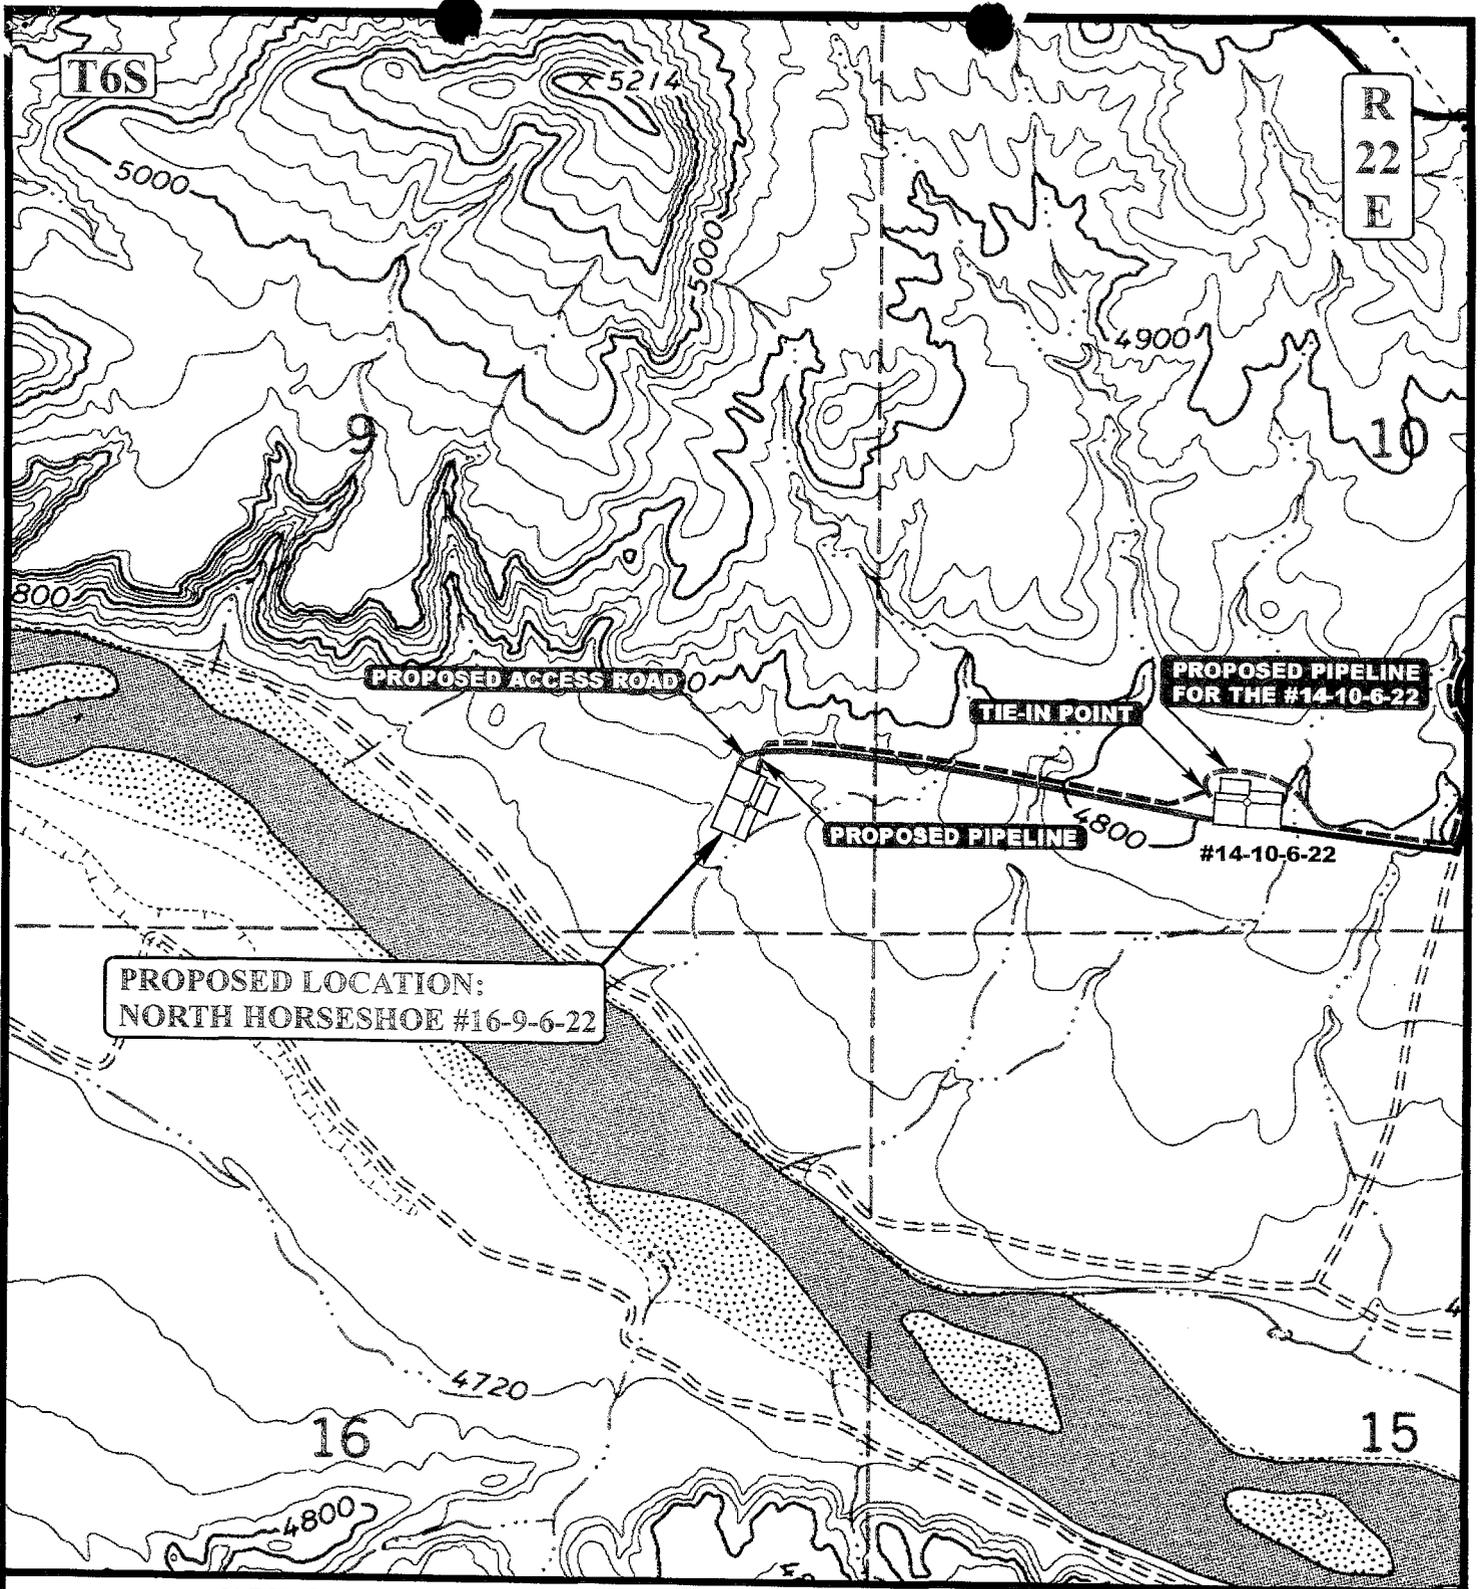

APPROXIMATE TOTAL PIPELINE DISTANCE = 2,514' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- - - - PROPOSED PIPELINE
- - - - PROPOSED PIPELINE (SERVICING OTHER WELLS)



THE HOUSTON EXPLORATION COMPANY

NORTH HORSESHOE #16-9-6-22
 SECTION 9, T6S, R22E, S.L.B.&M.
 704' FSL 649' FEL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC 08 15 05
 MAP MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: C.P. REVISED: 00-00-00



**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 03/14/2007

API NO. ASSIGNED: 43-047-39083

WELL NAME: N HORSESHOE 16-9-6-22
 OPERATOR: HOUSTON EXPLORATION CO, (N2525)
 CONTACT: BILL RYAN

PHONE NUMBER: 713-830-6800

PROPOSED LOCATION:

SESE 09 060S 220E
 SURFACE: 0704 FSL 0649 FEL
 BOTTOM: 0704 FSL 0649 FEL
 COUNTY: UINTAH
 LATITUDE: 40.30850 LONGITUDE: -109.4397
 UTM SURF EASTINGS: 632594 NORTHINGS: 4462957
 FIELD NAME: WILDCAT (1)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering	DLD	5/16/07
Geology		
Surface		

LEASE TYPE: 3 - State
 LEASE NUMBER: ML-47969
 SURFACE OWNER: 3 - State

PROPOSED FORMATION: MVRD
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[] Ind[] Sta[] Fee[]
(No. 104155044)
- W Potash (Y/N)
- N Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. T-76073)
- Y RDCC Review (Y/N)
(Date: 12/3/05)
- N/A Fee Surf Agreement (Y/N)
- N/A Intent to Commingle (Y/N)

LOCATION AND SITING:

- R649-2-3.
- Unit: _____
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
- Board Cause No: _____
- Eff Date: _____
- Siting: _____
- R649-3-11. Directional Drill

COMMENTS:

Profile (11-29-05)

STIPULATIONS:

- 1- Spacing Shp
- 2- STATEMENT OF BASIS

T6S R22E

9

10

NAPOLEON 2
◊

N HORSESHOE
16-9-6-22 ⊕
N HORSESHOE
16-9-6-22

N HORSESHOE
14-10-6-22 ⊕
N HORSESHOE
14-10-6-22

N HORSESHOE
4-15-6-22 ⊕
N HORSESHOE
4-15-6-22

N HORSESHOE
2-15-6-22 ⊕
N HORSESHOE
2-15-6-22

N HORSESHOE
5-16-6-22 ⊕

16

15

N HORSESHOE
3-21-6-22 ⊕

OPERATOR: THE HOUSTON EXPL (N2525)
SEC: 9,10,15 T.6S R. 22E
FIELD: WILDCAT (001)
COUNTY: UINTAH
SPACING: R649-3-2 / GENERAL SITING

- Wells Status**
- ⚡ GAS INJECTION
 - ⊗ GAS STORAGE
 - ⊗ LOCATION ABANDONED
 - ⊕ NEW LOCATION
 - ⊕ PLUGGED & ABANDONED
 - ⊕ PRODUCING GAS
 - PRODUCING OIL
 - ⊕ SHUT-IN GAS
 - SHUT-IN OIL
 - ⊗ TEMP. ABANDONED
 - ⊕ TEST WELL
 - ⊕ WATER INJECTION
 - ⊕ WATER SUPPLY
 - ⊕ WATER DISPOSAL
 - ⊕ DRILLING

- Field Status**
- ⬛ ABANDONED
 - ⬜ ACTIVE
 - ⬜ COMBINED
 - ⬜ INACTIVE
 - ⬜ PROPOSED
 - ⬜ STORAGE
 - ⬜ TERMINATED

- Unit Status**
- ⬜ EXPLORATORY
 - ⬜ GAS STORAGE
 - ⬜ NF PP OIL
 - ⬜ NF SECONDARY
 - ⬜ PENDING
 - ⬜ PI OIL
 - ⬜ PP GAS
 - ⬜ PP GEOTHERML
 - ⬜ PP OIL
 - ⬜ SECONDARY
 - ⬜ TERMINATED



PREPARED BY: DIANA MASON
DATE: 22-MARCH-2007

**DIVISION OF OIL, GAS AND MINING
APPLICATION FOR PERMIT TO DRILL
STATEMENT OF BASIS**

OPERATOR: _____ THE HOUSTON EXPLORATION COMPANY
WELL NAME & NUMBER: _____ NORTH HORSESHOE 16-9-6-22
API NUMBER: _____ 43-047-37393
LOCATION: 1/4,1/4 SE/SE sec:9 TWP: 6S RNG: 22E, 704 FSL 649 FEL

Geology/Ground Water:

The Houston Ex. Co. proposes to set 2000 feet of surface casing cemented to the surface. The base of the moderately saline water is estimated at 3,700 feet. A search of Division of Water Rights records shows two water wells within a 10,000 foot radius of the proposed location. These wells are approximately .25 miles and 1 mile west of the proposed well. The nearest well produces water from an unknown depth and is listed as industrial use. The farther well is 120 feet deep and is used for domestic and stock watering. The surface formation at this location is the Uinta Formation. The Uinta Formation is made up of discontinuous sands interbedded with shales and are not expected to produce prolific aquifers. The proposed surface casing should adequately protect any near surface aquifers.

Reviewer: _____ Brad Hill _____ **Date:** _____ 12-06-05 _____

Surface:

The predrill investigation of the surface was performed on 11/29/05. Ben Williams with UDWR and Jim Davis with SITLA were invited to this investigation by email on 11/22/05. Both were present.

Mr. Williams representing the UDWR stated the area is classified as high value yearlong habitat for antelope and critical value yearlong habitat for deer(relative to its vicinity to the Green River). He did not recommend any restriction periods or actions to the Operator or SITLA for these species. He stated no other wildlife species are expected to be significantly affected. Mr. Williams also gave Ms. Stringham and Mr. Davis a UDWR recommended seed mix to be used when reserve pit and location are reclaimed.

The location is in a drainage about.500 feet upslope from the Green River floodplain. Proper installation and maintenance of a liner in the reserve pit is essential during drilling operations.

This site is on State surface, with State minerals, and appears to be the best site for a location in the immediate area.

Reviewer: _____ Floyd Bartlett _____ **Date:** _____ 11/30/05 _____

Conditions of Approval/Application for Permit to Drill:

1. A synthetic liner with a minimum thickness of 16 mils and a felt subliner shall be properly installed and maintained in the reserve pit.

STATE ACTIONS
Resource Development Coordinating Committee
Governor's Office of Planning and Budget
5110 State Office Building
SLC, UT 84114
Phone No. 537-9230

1. State Agency Oil, Gas and Mining 1594 West North Temple, Suite 1210 Salt Lake City, UT 84114-5801	2. Approximate date project will start: Upon Approval or December 2, 2005
3. Title of proposed action: Application for Permit to Drill	
4. Description of Project: The Houston Exploration Company proposes to drill the North Horseshoe 16-9-6-22 well (wildcat) on a State lease ML-47969, Uintah County, Utah. This action is being presented to the RDCC for consideration of resource issues affecting state interests. The Division of Oil, Gas and Mining is the primary administrative agency in this action and must issue approval before operations commence.	
5. Location and detailed map of land affected (site location map required, electronic GIS map preferred) (include UTM coordinates where possible) (indicate county) 704' FSL 649' FEL, SE/4 SE/4, Section 9, Township 6 South, Range 22 East, Uintah County, Utah	
6. Possible significant impacts likely to occur: Surface impacts include up to five acres of surface disturbance during the drilling and completion phase (estimated for five weeks duration). If oil and gas in commercial quantities is discovered, the location will be reclaimed back to a net disturbance of between one and two acres – not including road, pipeline, or utility infrastructure. If no oil or gas is discovered, the location will be completely reclaimed.	
7. Identify local government affected a. Has the government been contacted? No. b. When? c. What was the response? d. If no response, how is the local government(s) likely to be impacted?	
8. For acquisitions of land or interests in land by DWR or State Parks please identify state representative and state senator for the project area. Name and phone number of state representative, state senator near project site, if applicable: a. Has the representative and senator been contacted? N/A	
9. Areawide clearinghouse(s) receiving state action: (to be sent out by agency in block 1) Uintah Basin Association of Governments	
10. For further information, contact: Diana Whitney Phone: (801) 538-5312	11. Signature and title of authorized officer  Gil Hunt, Associate Director Date: November 18, 2005

From: Robert Clark
To: Whitney, Diana
Date: 11/28/2005 9:17:07 AM
Subject: RDCC short turn around responses

The following comments are being submitted directly to DOG&M due to their short turn around status.

The following comments are submitted for **RDCC #5944-5949**. The comments pertain to all projects. **Comments begin:** The proposed *North Horseshoe 12-7-6-22, 16-9-6-22, 14-10-6-22, 2-15-6-22, 4-15-6-22, and 3-16-6-21* well drilling projects in Uintah County may require a permit, known as an Approval Order, from the Utah Division of Air Quality if any compressor stations are constructed at the site. A permit application, known as a Notice of Intent (NOI), should be submitted to the Executive Secretary at the Utah Division of Air Quality at 150 N. 1950 West, SLC, UT, 84116 for review according to the Utah Air Quality Rule R307-401. Permit: Notice of Intent and Approval Order. The proposed project is also subject to Utah Air Quality Rule R307-205-3, Fugitive Dust, due to the fugitive dust that is generated during the excavating phases of the project. These rules apply to construction activities that disturb an area greater than 1/4 acre in size. A permit, known as an Approval Order, is not required from the Division of Air Quality, but steps need to be taken to minimize fugitive dust, such as, watering and/or chemical stabilization, providing vegetative or synthetic cover and windbreaks. A copy of the rules may be found at www.rules.utah.gov/publicat/code/r307/r307.htm . **Comments end.**

The following comments are submitted for **RDCC #5950-5952**. The comments pertain to all projects. **Comments begin:** The proposed *Thurston 5-15-9-24, 13-29-9-24, and 10-15-9-24* well drilling projects in Uintah County may require a permit, known as an Approval Order, from the Utah Division of Air Quality if any compressor stations are constructed at the site. A permit application, known as a Notice of Intent (NOI), should be submitted to the Executive Secretary at the Utah Division of Air Quality at 150 N. 1950 West, SLC, UT, 84116 for review according to the Utah Air Quality Rule R307-401. Permit: Notice of Intent and Approval Order. The proposed project is also subject to Utah Air Quality Rule R307-205-3, Fugitive Dust, due to the fugitive dust that is generated during the excavating phases of the project. These rules apply to construction activities that disturb an area greater than 1/4 acre in size. A permit, known as an Approval Order, is not required from the Division of Air Quality, but steps need to be taken to minimize fugitive dust, such as, watering and/or chemical stabilization, providing vegetative or synthetic cover and windbreaks. A copy of the rules may be found at www.rules.utah.gov/publicat/code/r307/r307.htm . **Comments end.**

Robert Clark

Division of Air Quality
536-4435

CC: Mcneill, Dave; Wright, Carolyn

From: Ed Bonner
To: Whitney, Diana
Date: 12/20/2005 9:54:05 AM
Subject: Well Clearance

The following wells have been given cultural resource clearance by the Trust Lands Cultural Resources Group:

Enduring Resources, LLC
Big Pack 12-21-11-2
Big Pack 12-21-13-2
Big Pack 12-21-24-2

EOG Resources, Inc
Chapita Wells Unit 695-32

The Houston Exploration Company
North Walker Hollow 2-32-6-23
North Walker Hollow 8-32-6-23
North Walker Hollow 10-32-6-23
North Walker Hollow 12-32-6-23
North Walker Hollow 16-32-6-23
North Horseshoe 12-7-6-22
North Horseshoe 16-9-6-22
North Horseshoe 14-10-6-22
North Horseshoe 2-15-6-22
North Horseshoe 4-15-6-22

Westport Oil & Gas Company
NBU 1022-20N
NBU 1022-20L
NBU 1022-20F
NBU 1022-20D

If you have any questions regarding this matter please give me a call.

CC: Garrison, LaVonne; Hill, Brad; Hunt, Gil

Casing Schematic

Surface

BHP $0.052(9345)_{12} = 5831 \text{ psi}$
 Anticipate < 3000

Good $.12(9345) = 1121$
 $5831 - 1121 = 4710 \text{ psi, MASP}$

Casing \rightarrow MASP = 3775 psi
 Max allowed @ shoe $< 2000 \text{ psi}$

BOPE 3M ✓
 8-5/8" MW 8.4 Frac 19.3

Burst 4460

70% 3172

Max P @ surf shoe

$.22(7345) = 1616$
 $5831 - 1616 = 4215 \text{ psi}$

Max Allowed pressure @ shoe = 2000 psi ✓

Test to 3122 psi ✓

~~BOPE?~~
 BOPE? O.K.

✓ Adequate O.D. 5/6/02

4-1/2" MW 12.

12 187

TOC @ Duchesne River 0.

✓

-1950' ± BMSW
 -2074' Surface TOC w/10% w/o 2000. MD

TOC @ 2422.

-3645' Green River

✓

-6745' Wasatch

9345' Mesaverde Production 9345. MD

4743
 -2800
 1943

Well name:

2007-04 Houston N. Horseshoe 16-9-6-22Operator: **The Houston Exploration Co.**String type: **Surface**

Project ID:

43-047-39083

Location: **Uintah County, Utah****Design parameters:****Collapse**Mud weight: 8.400 ppg
Design is based on evacuated pipe.**Burst**Max anticipated surface
pressure: 1,760 psi
Internal gradient: 0.120 psi/ft
Calculated BHP 2,000 psi

No backup mud specified.

Minimum design factors:**Collapse:**

Design factor 1.125

Burst:

Design factor 1.00

Tension:8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)

Tension is based on buoyed weight.

Neutral point: 1,749 ft

Environment:H2S considered? No
Surface temperature: 75 °F
Bottom hole temperature: 103 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 1,500 ft

Cement top: Surface

Non-directional string.**Re subsequent strings:**Next setting depth: 9,345 ft
Next mud weight: 12.000 ppg
Next setting BHP: 5,825 psi
Fracture mud wt: 19.250 ppg
Fracture depth: 2,000 ft
Injection pressure: 2,000 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft ³)
1	2000	8.625	36.00	J-55	ST&C	2000	2000	7.7	667.9
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	873	3450	3.953	2000	4460	2.23	63	434	6.89 J

Prepared by: Helen Sadik-Macdonald
Div of Oil, Gas & MineralsPhone: (801) 538-5357
FAX: (801) 359-3940Date: April 12, 2007
Salt Lake City, Utah**Remarks:**

Collapse is based on a vertical depth of 2000 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:	2007-04 Houston N. Horseshoe 16-9-6-22		
Operator:	The Houston Exploration Co.		
String type:	Production	Project ID:	43-047-39083
Location:	Uintah County, Utah		

Design parameters:

Collapse

Mud weight: 12.000 ppg
 Design is based on evacuated pipe.

Burst

Max anticipated surface pressure: 3,770 psi
 Internal gradient: 0.220 psi/ft
 Calculated BHP 5,825 psi

No backup mud specified.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Tension:

8 Round STC: 1.80 (J)
 8 Round LTC: 1.80 (J)
 Buttress: 1.60 (J)
 Premium: 1.50 (J)
 Body yield: 1.50 (B)

Tension is based on buoyed weight.
 Neutral point: 7,669 ft

Environment:

H2S considered? No
 Surface temperature: 75 °F
 Bottom hole temperature: 206 °F
 Temperature gradient: 1.40 °F/100ft
 Minimum section length: 1,500 ft

Cement top: 5,254 ft

Non-directional string.

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	9345	4.5	11.60	N-80	LT&C	9345	9345	3.875	815.5

Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	5825	6350	1.090	5825	7780	1.34	89	223	2.51 J

Prepared by: Helen Sadik-Macdonald
 Div of Oil, Gas & Minerals

Phone: (801) 538-5357
 FAX: (801) 359-3940

Date: April 12, 2007
 Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 9345 ft, a mud weight of 12 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

May 16, 2007

Houston Exploration Company
1100 Louisiana, Suite 2000
Houston, TX 77002

Re: North Horseshoe 16-9-6-22 Well, 704' FSL, 649' FEL, SE SE, Sec. 9,
T. 6 South, R. 22 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-39083.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
SITLA

Page 2

43-047-39083

May 16, 2007

4. Compliance with the State of Utah Antiquities Act forbids disturbance of archeological, historical, or paleontological remains. Should archeological, historical or paleontological remains be encountered during your operations, you are required to immediately suspend all operations and immediately inform the Trust Lands Administration and the Division of State History of the discovery of such remains.
5. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)
6. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.
7. Operator shall comply with applicable recommendations resulting from Resource Development Coordinating Committee review. Statements attached.

**Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET**

ROUTING

1. DJJ

2. CDW

Change of Operator (Well Sold)

X - Operator Merger

The operator of the well(s) listed below has changed, effective:

6/1/2007

FROM: (Old Operator): N2525 - The Houston Exploration Company 1100 Louisiana, Suite 2000 Houston, TX 77002 Phone: 1-(713) 830-6800	TO: (New Operator): N6965-Forest Oil Corporation 707 17th St, Suite 3600 Denver, CO 80202 Phone: 1 (303) 812-1755
---	--

CA No.		Unit:						
WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
SEE ATTACHED LIST								

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 7/30/2007
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 7/30/2007
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 7/31/2007
- a. Is the new operator registered in the State of Utah: Business Number: 571171-0143
- b. If **NO**, the operator was contacted on: _____
- a. (R649-9-2) Waste Management Plan has been received on: IN PLACE
- b. Inspections of LA PA state/fee well sites complete on: _____
- c. Reports current for Production/Disposition & Sundries on: YES
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 7/31/2007 BIA
- Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: n/a
- Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: n/a
- Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: n/a

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 8/27/2007
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 8/27/2007
- Bond information entered in RBDMS on: 8/27/2007
- Fee/State wells attached to bond in RBDMS on: 8/27/2007
- Injection Projects to new operator in RBDMS on: n/a
- Receipt of Acceptance of Drilling Procedures for APD/New on: 7/30/2007

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: 6236351
- Indian well(s) covered by Bond Number: n/a
- a. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number 6218963
- b. The **FORMER** operator has requested a release of liability from their bond on: not yet

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 8/1/2007

COMMENTS:

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: See Attached List
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME:
2. NAME OF OPERATOR: Forest Oil Corporation <i>N6965</i>		8. WELL NAME and NUMBER: See Attached List
3. ADDRESS OF OPERATOR: 707 17th Street, #3600 CITY Denver, STATE CO ZIP 80202		9. API NUMBER: various
4. LOCATION OF WELL FOOTAGES AT SURFACE: See attached list		10. FIELD AND POOL, OR WILDCAT:
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		COUNTY:
		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____ <input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Change of Operator</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. *N2525*
 Effective 6/1/2007 please change the operator for the attached list of Utah wells from The Houston Exploration Company N-2525) to Forest Oil Corporation (N-6965). Forest merged with The Houston Exploration Company, a copy of the merger document is attached.. The contract operated wells will continue to be contract operated by Enduring.

Forest Oil Corporation as new operator, accepts all applicable terms, conditions, stipulations and restrictions concerning approved operations conducted on the lease or portion of the lease described.


Forest Oil Corporation meets the State of Utah bonding requirements under Safeco bond #6218963.

Please send all future correspondence to Forest Oil Corporation at the above listed address.

Forest Oil Corporation, 707 17th Street, Suite #3600, Denver, CO 80202


 J. C. Ridens, Senior Vice President - Western Region

7-5-07
Date

NAME (PLEASE PRINT) <u>Joanne C. Hresko</u>	TITLE <u>Vice President & General Mgr. - Northern Division</u>
SIGNATURE 	DATE <u>7-5-07</u>

(This space for State use only)

APPROVED 8/12/07

 (5/2000) **Earlene Russell**
 Division of Oil, Gas and Mining
 Earlene Russell, Engineering Technician

All wells with APD or New status

(See Instructions on Reverse Side)

RECEIVED
JUL 30 2007
 DIV OF OIL, GAS & MINING *wmp*

well_name	sec	twp	rng	api	entity	lease	well	stat	flag
HORSESHOE BEND 16-33	33	060S	210E	4304736214		Federal	OW	APD	
HORSESHOE BEND 3-33	33	060S	210E	4304736215		Federal	OW	APD	
N HORSESHOE 7-16-6-21	16	060S	210E	4304737438		State	GW	APD	C
N HORSESHOE 9-16-6-21	16	060S	210E	4304737439		State	GW	APD	C
N HORSESHOE 15-16-6-21	16	060S	210E	4304737440		State	GW	APD	C
N HORSESHOE 11-16-6-21	16	060S	210E	4304737441		State	GW	APD	C
N HORSESHOE 1-16-6-21	16	060S	210E	4304737442		State	GW	APD	C
N HORSESHOE 13-2-6-21	02	060S	210E	4304737476		State	GW	APD	C
N HORSESHOE 15-2-6-21	02	060S	210E	4304737477		State	GW	APD	C
GUSHER 2-2-6-19	02	060S	190E	4304737561		State	OW	APD	C
GUSHER 16-2-6-19	02	060S	190E	4304737562		State	OW	APD	C
GUSHER 1-2-6-19	02	060S	190E	4304737563		State	OW	APD	C
GUSHER 3-2-6-19	02	060S	190E	4304737568		State	OW	APD	C
E COYOTE 6-2-8-25	02	080S	250E	4304737572		State	GW	APD	C
E COYOTE 3-2-8-25	02	080S	250E	4304737573		State	GW	APD	C
E COYOTE 8-2-8-25	02	080S	250E	4304737574		State	GW	APD	C
N HORSESHOE 13-16-6-21	16	060S	210E	4304737575		State	GW	APD	C
E COYOTE 4-2-8-25	02	080S	250E	4304737882		State	GW	APD	C
E COYOTE 14-2-8-25	02	080S	250E	4304737883		State	GW	APD	C
E COYOTE 10-2-8-25	02	080S	250E	4304737884		State	GW	APD	C
E COYOTE 16-2-8-25	02	080S	250E	4304737885		State	GW	APD	C
E COYOTE 12-2-8-25	02	080S	250E	4304737886		State	GW	APD	C
N HORSESHOE 16-18-6-22	18	060S	220E	4304737887		Federal	GW	APD	C
N HORSESHOE 14-18-6-22	18	060S	220E	4304737888		Federal	GW	APD	C
N HORSESHOE 2-18-6-22	18	060S	220E	4304737889		Federal	GW	APD	C
N HORSESHOE 10-18-6-22	18	060S	220E	4304737890		Federal	GW	APD	C
N HORSESHOE 8-18-6-22	18	060S	220E	4304737891		Federal	GW	APD	C
N HORSESHOE 13-15-6-21	15	060S	210E	4304738013		Federal	GW	APD	C
N HORSESHOE 15-15-6-21	15	060S	210E	4304738014		Federal	GW	APD	C
N HORSESHOE 11-15-6-21	15	060S	210E	4304738015		Federal	GW	APD	C
N HORSESHOE 9-15-6-21	15	060S	210E	4304738016		Federal	GW	APD	C
N HORSESHOE 5-15-6-21	15	060S	210E	4304738017		Federal	GW	APD	C
N HORSESHOE 3-15-6-21	15	060S	210E	4304738018		Federal	GW	APD	C
N HORSESHOE 5-20-6-22	20	060S	220E	4304738019		Federal	GW	APD	C
N HORSESHOE 13-20-6-22	20	060S	220E	4304738020		Federal	GW	APD	C
N HORSESHOE 3-20-6-22	20	060S	220E	4304738021		Federal	GW	APD	C
N HORSESHOE 7-20-6-22	20	060S	220E	4304738022		Federal	GW	APD	C
N HORSESHOE 11-20-6-22	20	060S	220E	4304738023		Federal	GW	APD	C
N HORSESHOE 2-12-6-21	12	060S	210E	4304738198		Federal	GW	APD	C
N HORSESHOE 14-12-6-21	12	060S	210E	4304738199		Federal	GW	APD	C
N HORSESHOE 10-12-6-21	12	060S	210E	4304738200		Federal	GW	APD	C
N HORSESHOE 8-12-6-21	12	060S	210E	4304738201		Federal	GW	APD	C
N HORSESHOE 16-13-6-21	13	060S	210E	4304738202		Federal	GW	APD	C
N HORSESHOE 15-17-6-22	17	060S	220E	4304738203		Federal	GW	APD	C
N HORSESHOE 5-19-6-22	19	060S	220E	4304738204		Federal	GW	APD	C
N HORSESHOE 15-19-6-22	19	060S	220E	4304738205		Federal	GW	APD	C
N HORSESHOE 3-21-6-22	21	060S	220E	4304738206		Federal	GW	APD	C
N HORSESHOE 11-21-6-22	21	060S	220E	4304738207		Federal	GW	APD	C
N HORSESHOE 15-21-6-22	21	060S	220E	4304738208		Federal	GW	APD	C
N HORSESHOE 13-21-6-22	21	060S	220E	4304738209		Federal	GW	APD	C
N HORSESHOE 5-21-6-22	21	060S	220E	4304738210		Federal	GW	APD	C
N HORSESHOE 7-19-6-22	19	060S	220E	4304738271		Federal	GW	APD	C
N HORSESHOE 5-16-6-22	16	060S	220E	4304738406		State	GW	APD	

well_name	sec	twp	rng	api	entity	lease	well	stat	flag
TWELVEMILE WASH 11-13-5-20	13	050S	200E	4304738437		Federal	GW	APD	C
TWELVEMILE WASH 1-15-5-20	15	050S	200E	4304738438		Federal	GW	APD	C
N HORSESHOE 4-33-5-21	33	050S	210E	4304738439		Federal	GW	APD	C
GUSHER 6-15-6-19	15	060S	190E	4304738440		Federal	GW	APD	C
HORSESHOE BEND W 9-34-6-20	34	060S	200E	4304738441		Federal	GW	APD	C
N HORSESHOE 16-12-6-21	12	060S	210E	4304738442		Federal	GW	APD	C
N WALKER HOLLOW 12-29-6-23	29	060S	230E	4304738443		Federal	GW	APD	C
N WALKER HOLLOW 10-30-6-23	30	060S	230E	4304738444		Federal	GW	APD	C
PELICAN LAKE 11-3-8-20	03	080S	200E	4304738445		Federal	GW	APD	C
PELICAN LAKE 8-4-8-20	04	080S	200E	4304738446		Federal	GW	APD	C
E COYOTE 10-3-8-25	03	080S	250E	4304738447		Federal	GW	APD	C
BORDER 10-9-8-25	09	080S	250E	4304738448		Federal	GW	APD	C
N WALKER HOLLOW 14-33-6-23	33	060S	230E	4304738455		Federal	GW	APD	C
SNAKE JOHN WASH 14-11-7-25	11	070S	250E	4304738456		Federal	GW	APD	C
SNAKE JOHN WASH 4-24-7-25	24	070S	250E	4304738457		Federal	GW	APD	C
SQUAW RIDGE 1-26-7-25	26	070S	250E	4304738458		Federal	GW	APD	C
SQUAW RIDGE 13-28-7-25	28	070S	250E	4304738459		Federal	GW	APD	C
SQUAW RIDGE 16-30-7-25	30	070S	250E	4304738460		Federal	GW	APD	C
SQUAW RIDGE 14-16-7-25	16	070S	250E	4304738461		State	GW	APD	C
GUSHER 13-11-5-19	11	050S	190E	4304738462		State	GW	APD	C
N HORSESHOE 1-15-6-21	15	060S	210E	4304738831		Federal	GW	APD	C
N HORSESHOE 16-9-6-22	09	060S	220E	4304739083		State	GW	APD	
N HORSESHOE 12-7-6-22	07	060S	220E	4304739084		State	GW	APD	
N HORSESHOE 14-10-6-22	10	060S	220E	4304739085		State	GW	APD	
N HORSESHOE 2-15-6-22	15	060S	220E	4304739086		State	GW	APD	
N WALKER HOLLOW 12-32-6-23	32	060S	230E	4304739087		State	GW	APD	
N WALKER HOLLOW 10-32-6-23	32	060S	230E	4304739088		State	GW	APD	
N WALKER HOLLOW 16-32-6-23	32	060S	230E	4304739089		State	GW	APD	
N WALKER HOLLOW 8-32-6-23	32	060S	230E	4304739090		State	GW	APD	
N WALKER HOLLOW 11-36-6-23	36	060S	230E	4304739091		State	GW	APD	
N WALKER HOLLOW 13-36-6-23	36	060S	230E	4304739092		State	GW	APD	
N WALKER HOLLOW 14-32-6-23	32	060S	230E	4304739093		State	GW	APD	
N WALKER HOLLOW 15-36-6-23	36	060S	230E	4304739094		State	GW	APD	
N HORSESHOE 4-15-6-22	15	060S	220E	4304739095		State	GW	APD	
N HORSESHOE 9-10-6-21	10	060S	210E	4304739284		Federal	GW	APD	C
N HORSESHOE 12-13-6-21	13	060S	210E	4304739285		Federal	GW	APD	
N HORSESHOE 7-15-6-21	15	060S	210E	4304739286		Federal	GW	APD	
N HORSESHOE 9-19-6-22	19	060S	220E	4304739287		Federal	GW	APD	
N HORSESHOE 13-19-6-22	19	060S	220E	4304739288		Federal	GW	APD	
N HORSESHOE 11-19-6-22	19	060S	220E	4304739289		Federal	GW	APD	
SQUAW RIDGE 16-13-7-24	13	070S	240E	4304739319		Federal	GW	APD	C
N HORSESHOE 16-7-6-22	07	060S	220E	4304739320		Federal	GW	APD	C
SQUAW RIDGE 8-16-7-25	16	070S	250E	4304738024		State	GW	NEW	C

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Request to Transfer Application or Permit to Drill

(This form should accompany a Sundry Notice, Form 9, requesting APD transfer)

Well name:	N Horseshoe 16-9-6-22
API number:	4304739083
Location:	Qtr-Qtr: SESE Section: 9 Township: 6S Range: 22E
Company that filed original application:	The Houston Exploration Company
Date original permit was issued:	05/16/2007
Company that permit was issued to:	The Houston Exploration Company

Check one	Desired Action:
<input type="checkbox"/>	Transfer pending (unapproved) Application for Permit to Drill to new operator
<input type="checkbox"/>	The undersigned as owner with legal rights to drill on the property, hereby verifies that the information as submitted in the pending Application for Permit to Drill, remains valid and does not require revision. The new owner of the application accepts and agrees to the information and procedures as stated in the application.
<input checked="" type="checkbox"/>	Transfer approved Application for Permit to Drill to new operator
<input type="checkbox"/>	The undersigned as owner with legal rights to drill on the property as permitted, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.	Yes	No
If located on private land, has the ownership changed?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
If so, has the surface agreement been updated?	<input type="checkbox"/>	<input type="checkbox"/>
Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Have there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Have there been any changes to the access route including ownership or right-of-way, which could affect the proposed location?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Has the approved source of water for drilling changed?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Is bonding still in place, which covers this proposed well? Bond No. <u>6218963</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Any desired or necessary changes to either a pending or approved Application for Permit to Drill that is being transferred, should be filed on a Sundry Notice, Form 9, or amended Application for Permit to Drill, Form 3, as appropriate, with necessary supporting information as required.

Name (please print) Tami Hofmann Title Regulatory Specialist
 Signature  Date 08/06/2007
 Representing (company name) Forest Oil Corporation

The person signing this form must have legal authority to represent the company or individual(s) to be listed as the new operator on the Application for Permit to Drill.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: ML-47969
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: NA
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME: NA
2. NAME OF OPERATOR: Forest Oil Corporation		8. WELL NAME and NUMBER: North Horseshoe 16-9-6-22
3. ADDRESS OF OPERATOR: 707 17th ST Suite 3600 CITY Denver STATE CO ZIP 80202		9. API NUMBER: 4304739083
4. LOCATION OF WELL FOOTAGES AT SURFACE: 704' FSL & 649' FEL		10. FIELD AND POOL, OR WILDCAT: Exploratory
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 9 6S 22E		COUNTY: Uintah
		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Extension</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The Operator respectfully requests a one year approval extension for the subject location.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 04-29-08
By: [Signature]

COPY SENT TO OPERATOR

Date: 5-1-2008
Initials: KS

NAME (PLEASE PRINT) <u>Ginger Bowden</u>	TITLE <u>Agent</u>
SIGNATURE <u>[Signature]</u>	DATE <u>4/16/2008</u>

(This space for State use only)

RECEIVED
APR 28 2008



**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304739083
Well Name: North Horseshoe 16-9-6-22
Location: Section 9 Township 6 South Range 22 East SESE
Company Permit Issued to: Forest Oil Corporation (Houston Exploration Co)
Date Original Permit Issued: 5/16/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

Spinger Bowden
Signature

4/16/2008
Date

Title: Agent

Representing: Forest Oil Corporation

RECEIVED

APR 28 2008

DIV. OF OIL, GAS & MINING



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

July 1, 2009

Forest Oil Corporation
707 17th Street, Suite 3600
Denver, CO 80202

Re: APD Rescinded – N Walker Hollow 16-9-6-22, Sec.9, T.6S, R.22E
Uintah County, Utah API No. 43-047-39083

Ladies and Gentlemen:

The Application for Permit to Drill (APD) for the subject well was approved by the Division of Oil, Gas and Mining (Division) on May 16, 2007. On April 29, 2008, the Division granted a one-year APD extension. No drilling activity at this location has been reported to the division. Therefore, approval to drill the well is hereby rescinded, effective July 1, 2009.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
SITLA, Ed Bonner

