

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE*

FORM APPROVED
OMB NO. 1040-0138
Expires: February 28, 1995

5. LEASE DESIGNATION AND SERIAL NO.

UTU-69001

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

N/A

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

TYPE OF WORK

DRILL

DEEPEN

TYPE OF WELL

OIL WELL

GAS WELL

OTHER

SINGLE ZONE

MULTIPLE ZONE

7. UNIT AGREEMENT NAME

GLEN BENCH

8. FARM OR LEASE NAME, WELL NO.

GB 4DML-20-8-22

2. NAME OF OPERATOR

QUESTAR EXPLORATION & PRODUCTION, CO.

Contact: Jan Nelson

E-Mail: jan.nelson@questar.com

9. API NUMBER:

43-047-39228

3. ADDRESS

1571 E. 1700 S. Vernal, Ut 84078

Telephone number

Phone 435-781-4032 Fax 435-781-4045

10. FIELD AND POOL, OR WILDCAT

NATURAL BUTTES

4. LOCATION OF WELL (Report location clearly and in accordance with and State requirements*)

At Surface 630613X 1307' FNL 1235' FWL NWNW SECTION 20, T8S, R22E

At proposed production zone 44412354 40.113180 -109.467391

11. SEC., T, R, M, OR BLK & SURVEY OR AREA

SEC. 20, T8S, R22E Mer SLB

14. DISTANCE IN MILES FROM NEAREST TOWN OR POSTOFFICE*

14 +/- EAST OF OURAY, UTAH

12. COUNTY OR PARISH

Uintah

13. STATE

UT

15. DISTANCE FROM PROPOSED LOCATION TO NEAREST

PROPERTY OR LEASE LINE, FT.
(also to nearest drig, unit line if any)

1307' +/-

16. NO. OF ACRES IN LEASE

320.00

17. NO. OF ACRES ASSIGNED TO THIS WELL

20

18. DISTANCE FROM PROPOSED location to nearest well, drilling, completed, applied for, on this lease, ft

825' +/-

19. PROPOSED DEPTH

16,677

20. BLM/BIA Bond No. on file

ESB000024

21. ELEVATIONS (Show whether DF, RT, GR, ect.)

4815.3' GR

22. DATE WORK WILL START

ASAP

23. Estimated duration

90 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan
- A surface Use Plan (if location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification.
- Such other site specific information and/or plans as may be required by the authorized officer.

SIGNED

Name (printed/typed) Jan Nelson

DATE 4-16-07

TITLE

Regulatory Affairs

(This space for Federal or State office use)

PERMIT NO.

43-047-39228

APPROVAL DATE

Application approval does not warrant or certify the applicant holds any legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon

CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY

TITLE

BRADLEY G. HILL
ENVIRONMENTAL MANAGER

DATE

04-30-07

*See Instructions On Reverse Side

Title 18 U.S.C Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

Federal Approval of this
Action is Necessary

RECEIVED

APR 20 2007

CONFIDENTIAL

DIV. OF OIL, GAS & MINING

Additional Operator Remarks

Questar Explor. & Prod. Co. proposes to drill a well to 16,677' to test the Mancos formation. If productive, casing will be run and the well completed. If dry, the well will be plugged and abandoned as per BLM and State of Utah requirements"

See Onshore Oil & Gas Order No. 1

Please see Questar Explor. & Prod. Co. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

Please be advised that Questar Explor. & Prod. Co. agrees to be responsible under the terms and conditions of the lease for the operations conducted upon the lease lands.

Bond coverage for this well is provided by Bond No.ESB000024. The principal is Questar Explor. & Prod. Co. via surety as consent as provided for the 43 CFR 3104.2.

DRILLING PROGRAM

ONSHORE OIL & GAS ORDER NO. 1
Approval of Operations on Onshore
Federal Oil and Gas Leases

All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas No. 1, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

1. Formation Tops

The estimated tops of important geologic markers are as follows:

<u>Formation</u>	<u>Depth</u>
Uinta	Surface
Green River	2,482'
Wasatch	5,742'
Mesaverde	8,622'
Sego	10,862'
Castlegate	11,092'
Blackhawk	11,467'
Mancos Shale	11,942'
Mancos B	12,307'
Frontier	15,042'
Dakota Silt	15,917'
Dakota	16,157'
Morrison	16,557'
TD	16,677'

2. Anticipated Depths of Oil Gas Water and Other Mineral Bearing Zones

The estimated depths at which the top and bottom of the anticipated water, oil, gas. Or other mineral bearing formations are expected to be encountered are as follows:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
Gas	Wasatch	5,742'
Gas	Mesaverde	8,622'
Gas	Blackhawk	11,467'
Gas	Mancos Shale	11,942'
Gas	Mancos B	12,307'
Gas	Dakota	16,157'

DRILLING PROGRAM

All fresh water and prospectively valuable minerals encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

All water shows and water-bearing sands will be reported to the BLM in Vernal, Utah. Copies of State of Utah form OGC-8-X are acceptable. If flows are detected, samples will be submitted to the BLM along with any water analyses conducted. Fresh water will be obtained from Wonsits Valley water right # A36125 (which was filed on May 7, 1964,) or Red Wash water right # 49-2153 (which was filed on March 25, 1960). It was determined by the Fish and Wildlife Service that any water right number filed before 1989 is not depleting to the Upper Colorado River System, to supply fresh water for drilling purposes. All water resulting from drilling operations will be disposed of at Red Wash Central Battery Disposal Site; SWSE, Section 27, T7S, R23E or Wonsits Valley Disposal Site; SWNW, Section 12, T8S, R21E.

3. **Operator's Specification for Pressure Control Equipment:**

- A. 11" or 13-5/8" 10,000 psi double gate, 10,000 psi single gate, 10,000 psi annular BOP (schematic included) from 7" casing point to total depth. Prior to the 7" casing seat, the BOPE will be tested to 5000 psi due to the 5000 psi wellhead pressure rating exposed to the wellbore. The choice of BOP stacks is based on the drilling contractors availability.
- B. Functional test daily
- C. All casing strings shall be pressure tested (0.2 psi/foot or 1500 psi, whichever is greater) prior to drilling the plug after cementing; test pressure shall not exceed the internal yield pressure of the casing.
- D. Ram type preventers and associated equipment shall be tested to the approved stack working pressure if isolated by test plug or to 50 percent of internal yield pressure of casing whichever is less. BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc..., for a 10M system and individual components shall be operable as designed.

DRILLING PROGRAM

4. **Casing Design:**

Hole Size	Csg. Size	Top (MD)	Bottom (MD)	Wt.	Grade	Thread	Cond.
26"	20"	Sfc	40-60'	Steel	Cond.	None	Used
14-3/4"	10-3/4"	Sfc	1000'	40.5	J-55	LTC	New
8-3/4"	7"	Sfc	9000'	26	HCP-110	LTC	New
8-3/4"	7"	9000'	11,050'	29* SDrift	HCP-110	LTC	New
6-1/8"	4-1/2"	sfc	13,700'	15.1	P-110	LTC	New
6-1/8"	4-1/2"	13,700'	16,677'	15.1	Q-125	LTC	New

Casing Strengths:				Collapse	Burst	Tensile (minimum)
40.5"	40.5 lb.	J-55	STC	1,580 psi	3,130 psi	420,000 lb.
7"	26 lb.	HCP-110	LTC	7,800 psi	9,950 psi	693,000 lb.
7"	29 lb.*	HCP-110	LTC	9,200 psi	11,220 psi	797,000 lb.
4-1/2"	15.1 lb.	P-110	LTC	14,350 psi	14,420 psi	406,000 lb.
4-1/2"	15.1 lb.	Q-125	LTC	15,840 psi	16,380 psi	438,000 lb.

* **Special Drift**

MINIMUM DESIGN FACTORS:

COLLAPSE: 1.125
 BURST: 1.10
 TENSION: 1.80

Area Fracture Gradient: 0.9 psi/foot
 Maximum anticipated mud weight: 15.4 ppg
 Maximum surface treating pressure: 12,500 psi

DRILLING PROGRAM

5. **Auxiliary Equipment**

- A. Kelly Cock – yes
- B. Float at the bit – no
- C. Monitoring equipment on the mud system – visually and/or PVT/Flow Show
- D. Full opening safety valve on the rig floor – yes
- E. Rotating Head – yes
If drilling with air the following will be used:
- F. The blooie line shall be at least 6” in diameter and extend at least 100’ from the well bore into the reserve/blooie pit.
- G. Blooie line ignition shall be provided by a continuous pilot (ignited when drilling below 500’).
- H. Compressor shall be tied directly to the blooie line through a manifold.
- I. A mister with a continuous stream of water shall be installed near the end of the blooie lines for dust suppression.

Surface hole will be drilled with air, air/mist, foam, or mud depending on hole conditions. Drilling below surface casing will be with water based drilling fluids consisting primarily of fresh water, bentonite, lignite, caustic, lime, soda ash and polymers. No chromates will be used. It is not intended to use oil in the mud, however, in the event it is used, oil concentration will be less than 4% by volume. Maximum anticipated mud weight is 15.4 ppg.

No minimum quantity of weight material will be required to be kept on location.

PVT/Flow Show will be used from base of surface casing to TD.

Gas detector will be used from surface casing depth to TD.

6. **Testing, logging and coring program**

- A. Cores – none anticipated
- B. DST – none anticipated

DRILLING PROGRAM

- C. Logging – Mud logging – 4500' to TD
GR-SP-Induction, Neutron Density, FMI
- D. Formation and Completion Interval: Mancos interval, final determination of completion will be made by analysis of logs.
Stimulation – Stimulation will be designed for the particular area of interest as encountered.

7. Cementing Program

20" Conductor:

Cement to surface with construction cement.

10-3/4" Surface Casing: sfc – 1000' (MD)

Slurry: 0' – 1000'. 927 sks (1112 cu ft) Premium cement + 0.25 lbs/sk Flocele + 2% CaCl₂ Slurry wt: 15.6 ppg, slurry yield: 1.20 ft³/sx, slurry volume: 12/1/4" hole + 100% excess.

7" Intermediate Casing: sfc - 11,050' (MD)

Foamed Lead Slurry 2: 5,500' – 10,650'. 785 sks (1161 cu ft) 50/50 Poz Premium + 5 lb/sk silicalite compacted light weight additive + 20% SSA-1 additive + 0.3% FDP-C766-05 fluid loss + 0.2% Versaset thixotropic additive + 1.5% Zonesealant 2000 foamer. Slurry wt: 14.3 ppg, foamed 11.5 ppg, Slurry yield: 1.48 ft³/sk, Slurry yield foamed: 1.96 ft³/sk, Slurry volume: 8-3/4" hole + 50% excess.

Tail Slurry: 10,650' – 11,050'. 61 sks (90.21 cu ft) of 50/50 Poz Premium + 5 lb/sk silicalite compacted light weight additive + 20% SSA-1 additive + 0.3% FDP-C766-05 fluid loss + 0.2% Versaset thixotropic additive. Slurry wt: 14.3 ppg, Slurry yield: 1.48 ft³/sk, Slurry volume: 8-3/4" hole + 50% excess.

4-1/2" Production Casing: sfc - 16,677' (MD)

Lead/Tail Slurry: 5,500 - 16,677'. 802 sks (1316 cu ft) Premium Cement + 0.5% HR-12 retarder + 35% SSA-1 + 0.2% Suspend HT + 0.4% Halad(R)-344 fluid loss + 0.3% Halad(R)-413 fluid loss + 0.4% Super CBL gas migration + 0.2% HR-25 retarder. Slurry wt: 15.25 ppg, Slurry yield: 1.64 ft³/sk, Slurry volume: 6-1/8" hole + 25% in open hole section.

*Final cement volumes to be calculated from caliper log with an attempt to be made to circulate cement to the surface on the intermediate string and 5,000' on the production string. A bond log will be run across the zone of interest and across zones as required by the authorized officer to insure protection of natural resources.

DRILLING PROGRAM

8. **Anticipated Abnormal Pressures and Temperatures, Other Potential Hazards**


No abnormal temperatures or pressures are anticipated. No H₂S has been encountered in or known to exist from previous wells drilled to similar depths in the general area. Maximum anticipated bottom hole pressure equals approximately 9900 psi. Maximum anticipated bottom hole temperature is 310° F.

DRILLING PROGRAM

Purpose:

Either an 11" 10,000 psi stack or an 13-5/8" 10,000 psi stack will be used for well control in the slim hole environment.

BOP Requirements:

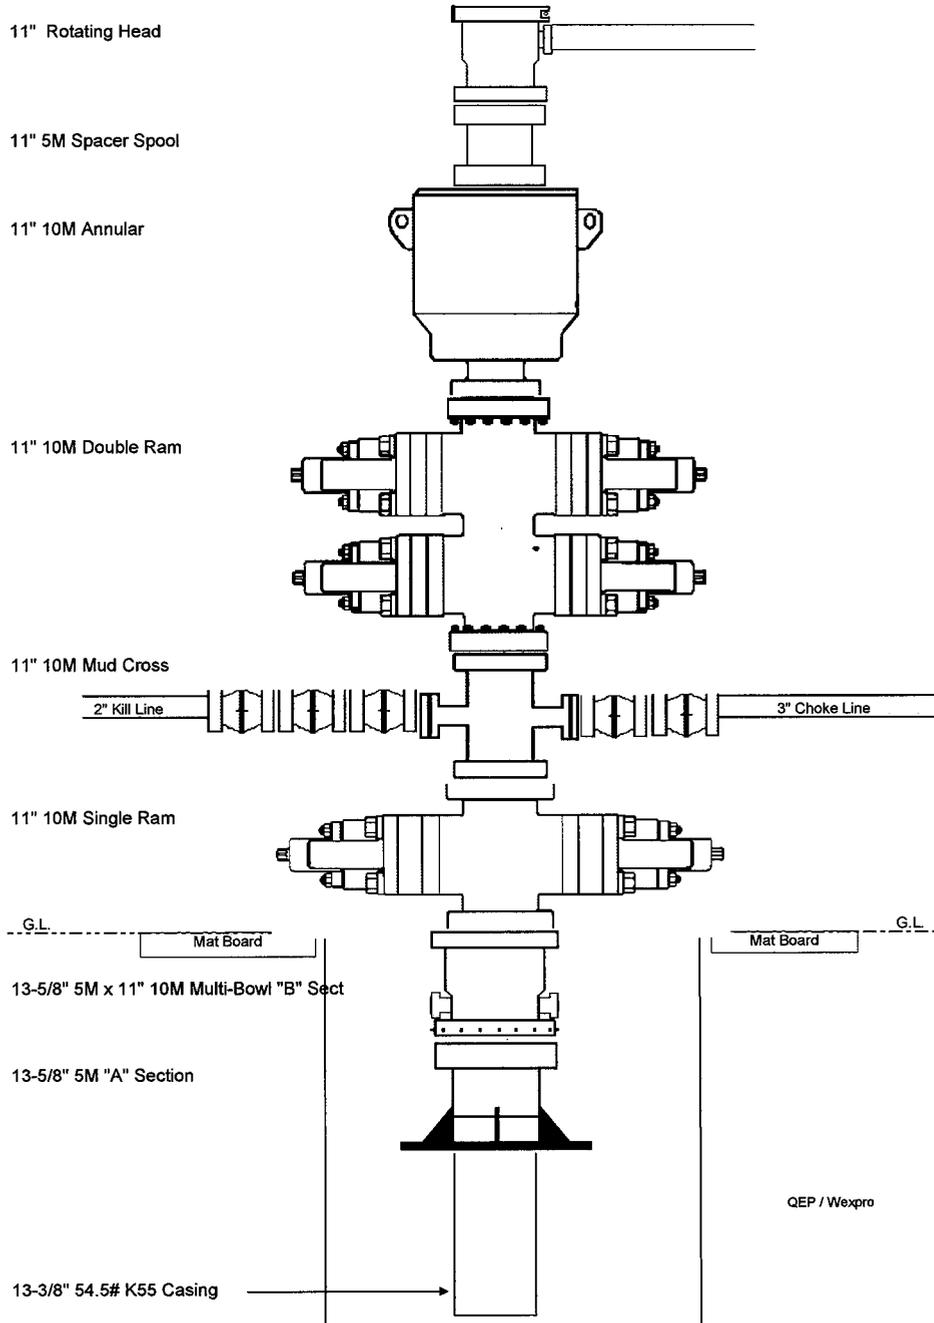

QUESTAR EXPLORATION & PRODUCTION, CO.
GB 4DML-20-8-22
1307' FNL 1235' FWL
NWNW, SECTION 20, T8S, R22E
UINTAH COUNTY, UTAH
LEASE # UTU-69001

ONSHORE ORDER NO. 1

MULTI – POINT SURFACE USE & OPERATIONS PLAN

An onsite inspection was conducted for the GB 4DML-20-8-22 on March 22-2007 . Weather conditions were cool and breezy at the time of the onsite. In attendance at the inspection were the following individuals:

Paul Buhler	Bureau of Land Management
Amy Torres	Bureau of Land Management
Ann Figueroa	Bureau of Land Management
Jan Nelson	Questar Exploration & Production, Co.

1. **Existing Roads:**

The proposed well site is approximately 14 miles east of Ouray, Utah.

Refer to Topo Maps A and B for location of access roads within a 2 – mile radius.

There will be no improvements made to existing road.

2. **Planned Access Roads:**

Please see Questar Explor. & Prod. Co. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

Refer to Topo Map B for the location of the proposed access road.

3. **Location of Existing Wells Within a 1 – Mile Radius:**

Please refer to Topo Map C.

4. **Location of Existing & Proposed Facilities:**

Please see Questar Explor. & Prod. Co. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

Refer to Topo Map D for the location of the proposed pipeline.

Pipeline will be 6" or smaller.

5. **Location and Type of Water Supply:**

Please see Questar Explor. & Prod. Co. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

Water for drilling purposes would be obtained from Wonsits Valley Water Right # A 36125 (which was filed on May 7, 1964) or Red Wash Water Right # 49-2153 (which was filed on March 25, 1960). It was determined by the Fish and Wildlife Service that any water right number filed before 1989 is not depleting to the Upper Colorado River System.

6. Source of Construction Materials:

Please see Questar Explor. & Prod. Co. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

7. Methods of Handling Waste Materials:

Please see Questar Explor. & Prod. Co. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

8. Ancillary Facilities:

Please see Questar Explor. & Prod. Co. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

9. Well Site Layout: (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

A pit liner is required. A felt pit liner will be required if bedrock is encountered.

10. Plans for Reclamation of the Surface:

Please see Questar Explor. & Prod. Co. Standard Operating Practices dated October 18, 2005, for Mesa Verde Formation Wells located in Red Wash, Wonsits Valley, Gypsum Hills, White River, Glen Bench, and Undesignated fields in Townships 07, 08 and 09 South, Ranges 21 to 25 East.

Interim Reclamation

Please see attached Interim Reclamation plan.

Once the well is put onto production, QEP will reclaim as much of the well pad as possible that will allow for operations to continue in a safe and reasonable manner. Reseeding will be done in the spring or fall of every year to allow winter precipitation to aid in the success of reclamation.

Seed Mix:

Interim Reclamation:

6 lbs Hycrest Crested Wheatgrass

6 lbs Forage Kochia

Final Reclamation:

Seed Mix # 3 3 lbs. Shadscale, 4lbs. Hycrest Crested Wheat Grass, 3 lbs. Indian Rice Grass,
3 lbs. Needle & Threadgrass

11. **Surface Ownership:**

Bureau of Land Management
170 South 500 East
Vernal, Utah 84078
(435) 781-4400

12. **Other Information**

A Class III archaeological survey was conducted by Montgomery Archaeology Consultants. A copy of this report was submitted directly to the appropriate agencies by Montgomery Archaeology Consultants. Cultural resource clearance was recommended for this location.

A class III paleontological survey was conducted by Intermountain Paleo Consulting. A copy of this report was submitted directly to the appropriate agencies by Stephen D. Sandau. The inspection resulted in the location of no fossil resources. However, if vertebrate fossil(s) are found during construction a paleontologist should be immediately notified. QEP will provide paleo monitor if needed.

Clean existing pond on the GB 14W-17-8-22 use cobble rock for spillway.

QEP will carry out Interim Reclamation mitigation for the habitat loss on well location GB 4W-20-8-22.

QUESTAR EXPLORATION & PRODUCTION, CO.
Request for Exception to Buried Pipeline
for
GB 4DML-20-8-22

QEP respectfully requests an exception to burying this pipeline. We understand the standard Condition of Approval (COA) that may be included in the approved Application for Permit to Drill (APD) is: *“As a Best Management Practice (BMP), the pipeline would be buried within the identified construction width of an access corridor that contains the access road and pipelines. The construction width for the access corridor would increase from 30 feet, by an additional 20 feet, to a total of 50 feet. Exceptions to this BMP may be granted where laterally extensive, hard indurated bedrock, such as sandstone, is at or within 2 feet of the surface; and, soil types with a poor history of successful rehabilitation.”* QEP will install the pipeline within the access corridor and will avoid cross-country installation when possible. Our reason for requesting a surface line is based on the following justification:

Class IV VRM

- ◆ This area’s designated Visual Resource Management is classified as Class IV. The Class IV objective is to provide for management activities that require major modification to the existing character of the landscape. The level of change to the landscape can be high. The management activities may dominate the view and may be the major focus of the viewer attention. However, every attempt should be made to minimize the impact of these activities through careful location, minimal disturbance, and repetition of the basic visual elements of form, line, color, and texture.
- ◆ QEP feels that surface pipe will comply with this classification more so than buried pipe due to the amount of surface disturbance that will be required to bury it. We believe surface installation within the access corridor will minimize the disturbance so that the pipeline does not dominate the view.

Environmental and Safety Concerns

- ◆ Buried pipe will greatly increase surface disturbance and habitat fragmentation. The soil in this area has a poor history of successful rehabilitation. Buried pipe will have an increased corrosion rate and would need to be dug up for repairs or replacement; the constant surface disturbance will not allow time for successful reclamation.
- ◆ Increasing surface disturbance will greatly increase noxious and invasive weed infestation.

- ♦ With the increased corrosion rate, buried pipe may have undetectable leaks that could go unnoticed for months. Small leaks may turn into large plumes of underground hazards because they are not easily monitored and not seen right away. An undetected leak also increases the potential for explosive incidents. Once detected, the surface will need to be disturbed, once again, to dig up the line and replace or repair it.
- ♦ Accidents associated with pipe breaks during construction activities could increase substantially as the number of buried lines increases.
- ♦ The additional surface disturbance will increase the risk of disturbing paleontological sites.

Operational and Mechanical Concerns for Gas Lines

- ♦ Cathodic protection will be required for buried pipe. Cathodic protection requires anode beds that must be maintained. This will add substantial costs in labor and material. Additional power lines will need to be installed to the anode beds. The additional costs for equipment and labor will be approximately \$50,000.00 per section.
- ♦ Pipeline markers need to be used with buried pipe. This will add costs in labor and material.
- ♦ Every tie in requires a valve. The average distance between valves is approximately ¼ mile. Valves will have to be placed in “freeze boxes” or “valve boxes”. Valve boxes will be considered confined space which increases the manpower needed to repair or replace valves. Every valve box will also require bright yellow guard rails.
- ♦ Additional equipment required for buried pipe can include blades/dozers, trenchers (cutting or blasting in hard rock), side booms, etc. which increases installation costs.
- ♦ Buried pipe must have fusion bonded epoxy (FBE) coating. FBE pipe will cost an additional \$2.00 per foot compared to bare pipe.
- ♦ This pipeline has the potential for being upgraded/upsized to a larger pipe diameter depending on production volumes. If upsizing is required, the pipe will need to be dug up which will cause additional surface disturbance and will not allow adequate time for successful reclamation.
- ♦ Surface lines are sometimes relocated to accommodate new locations; this is done in an effort to minimize the amount of pipe needed and the amount of surface disturbed. If this pipe is buried, this will no longer be an option.

Lessee's or Operator's Representative:

Jan Nelson
Red Wash Rep.
Questar Exploration & Production, Co.
1571 East 1700 South
Vernal, Utah 84078
(435) 781-4032


Certification:

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil & Gas Orders, the approved plan of operations, and any applicable Notice to Lessees.

Questar Explor. & Prod. Co. will be fully responsible for the actions of their subcontractors.

A complete copy of the approved Application for Permit to Drill will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Questar Explor. & Prod. Co. it's contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.



Jan Nelson
Red Wash Representative

16-Apr-07

Date

QUESTAR EXPLR. & PROD.

GB #4DML-20-8-22

LOCATED IN UINTAH COUNTY, UTAH
SECTION 20, T8S, R22E, S.L.B.&M.

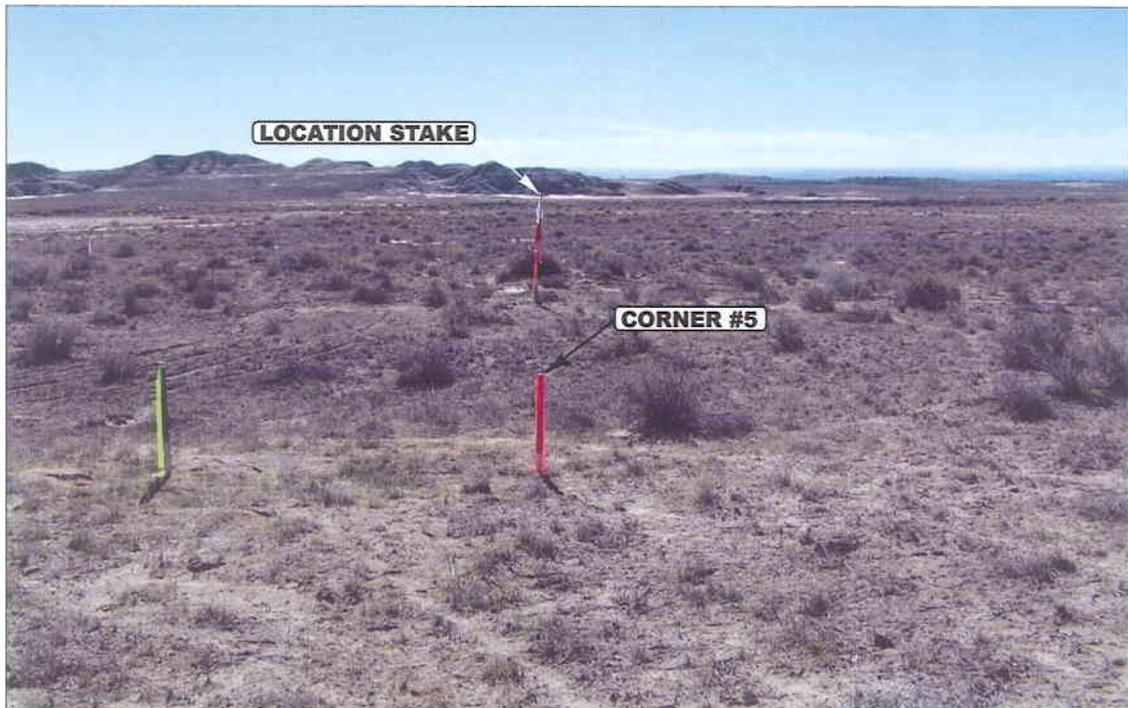


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: SOUTHERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHWESTERLY



UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

10 27 06
MONTH DAY YEAR

PHOTO

TAKEN BY: D.A.

DRAWN BY: L.K.


REVISED: 00-00-00

QUESTAR EXPLR. & PROD.

FIGURE #1

LOCATION LAYOUT FOR



GB #4DML-20-8-22
SECTION 20, T8S, R22E, S.L.B.&M.
1307' FNL 1235' FWL

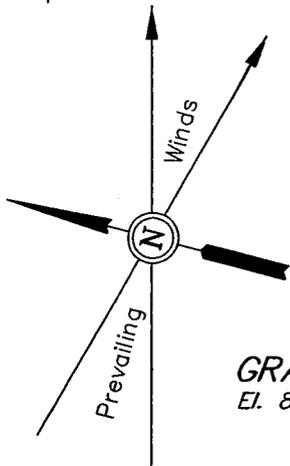

GRADE
El. 815.3'

SCALE: 1" = 60'
DATE: 10-27-06
DRAWN BY: P.M.
REVISED: 11-20-06

NOTE:
Flare Pit is to be located
a min. of 100' from the
Well Head.

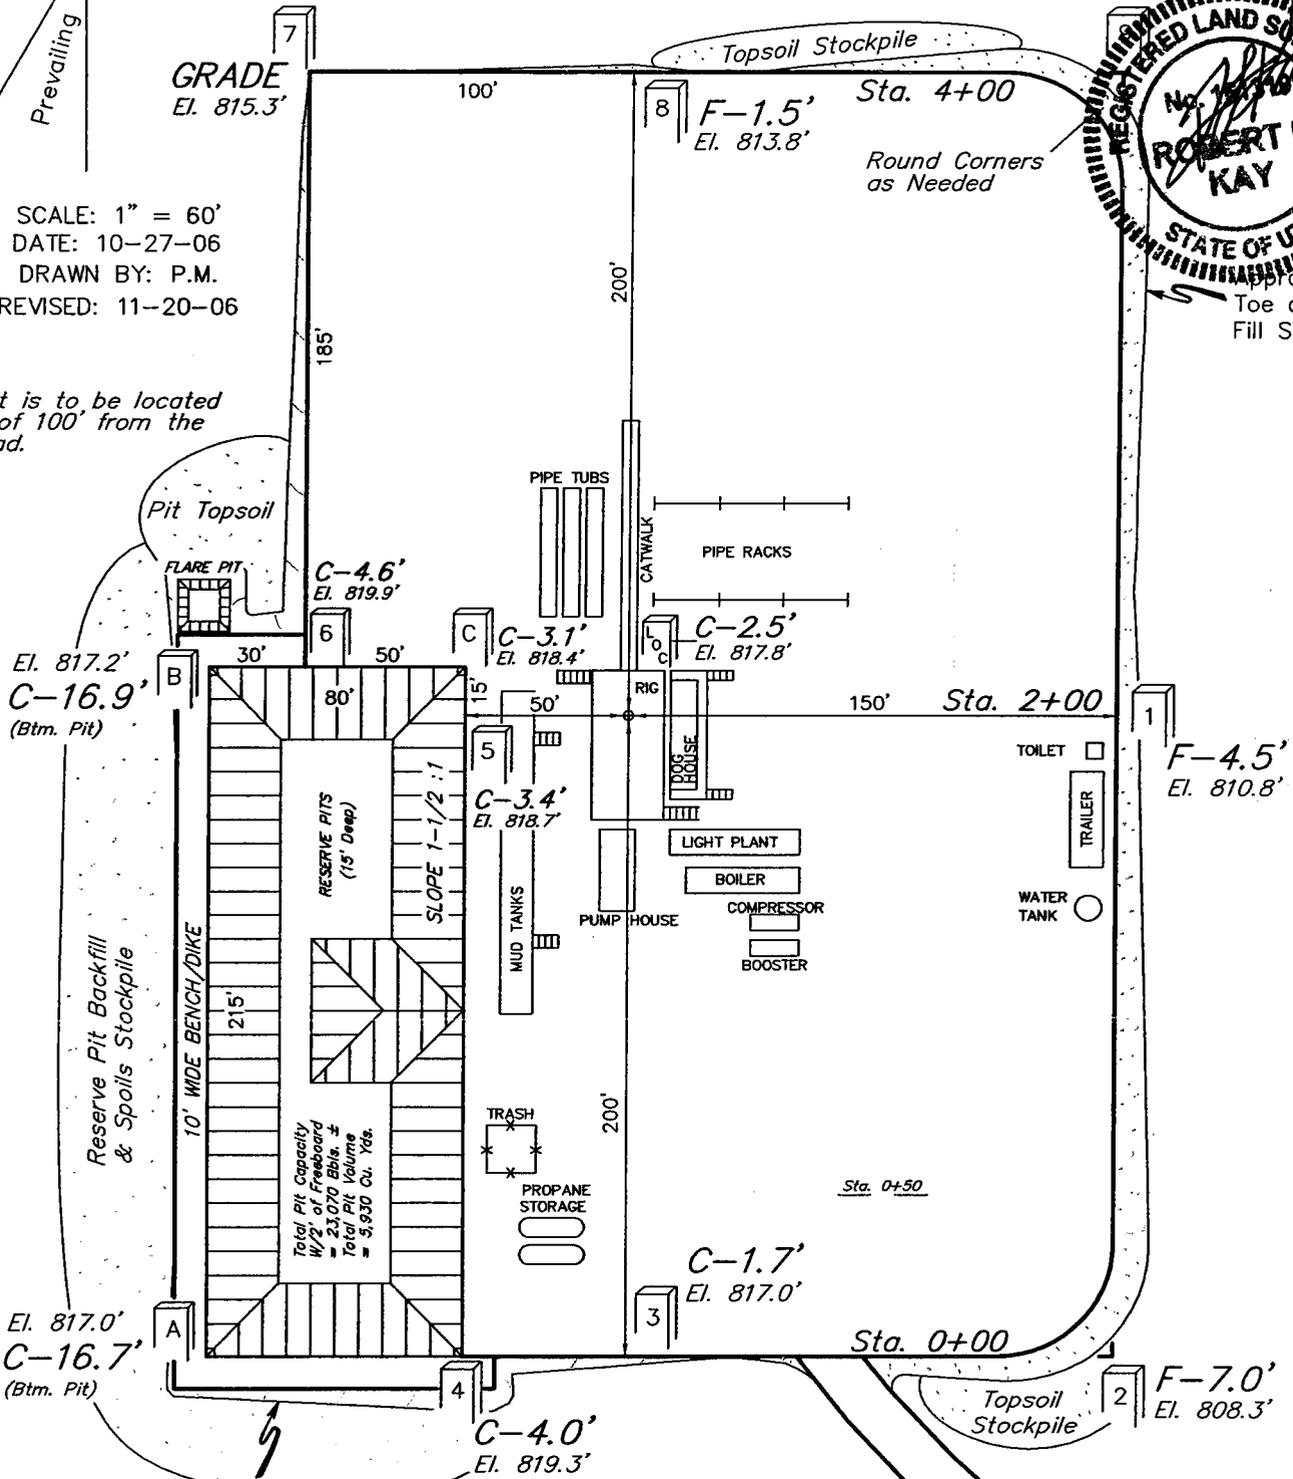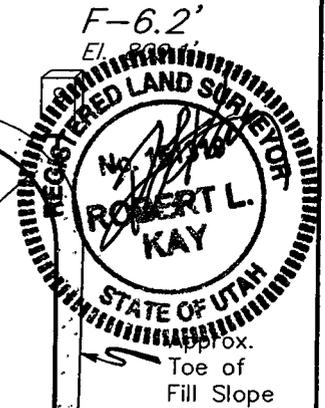

Total Pit Capacity
W/2' of Freeboard
= 23,070 Bbls. ±
Total Pit Volume
= 5,930 Cu. Yds.

NOTES:


Elev. Ungraded Ground At Loc. Stake = 4817.8'
FINISHED GRADE ELEV. AT LOC. STAKE = 4815.3'

QUESTAR EXPLR. & PROD.






FIGURE #2

TYPICAL CROSS SECTIONS FOR

GB #4DML-20-8-22
SECTION 20, T8S, R22E, S.L.B.&M.
1307' FNL 1235' FWL



DATE: 10-27-06
DRAWN BY: P.M.
REVISED: 11-20-06

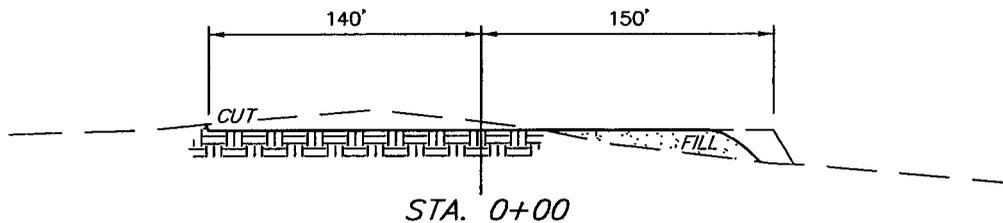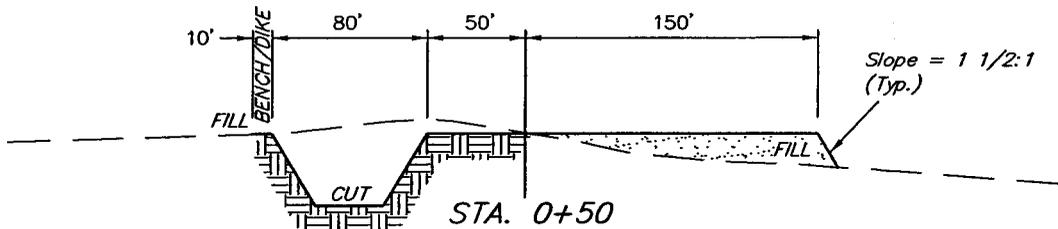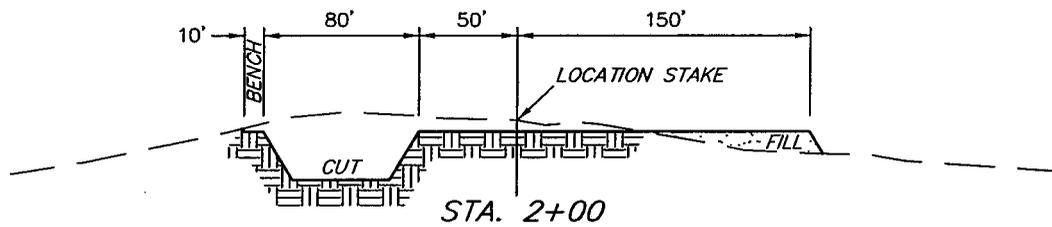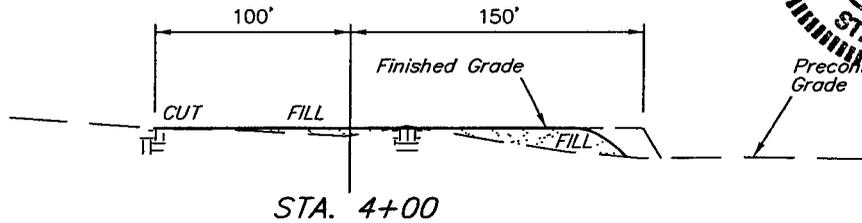

NOTE:

Topsoil should not be Stripped Below Finished Grade on Substructure Area.

* NOTE:

FILL QUANTITY INCLUDES 5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 2,220 Cu. Yds.
Remaining Location	= 9,610 Cu. Yds.
TOTAL CUT	= 11,830 CU.YDS.
FILL	= 6,640 CU.YDS.


EXCESS MATERIAL	= 5,190 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 5,190 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	= 0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017



QUESTAR EXPLR. & PROD.
INTERIM RECLAMATION PLAN FOR

FIGURE #3

GB #4DML-20-8-22
SECTION 20, T8S, R22E, S.L.B.&M.
1307' FNL 1235' FWL




SCALE: 1" = 60'
DATE: 10-27-06
DRAWN BY: P.M.
REVISED: 11-20-06

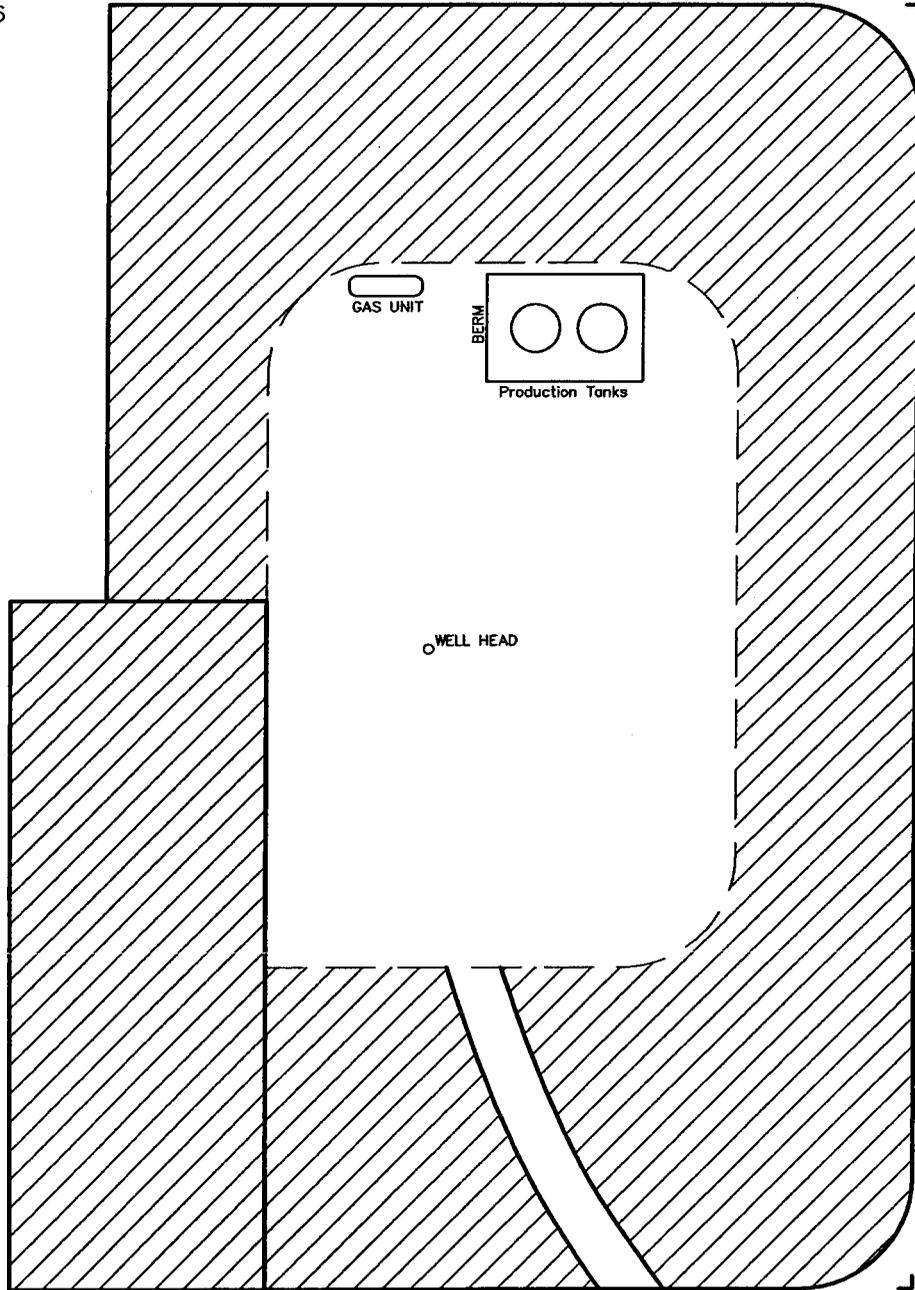

 INTERIM RECLAMATION

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

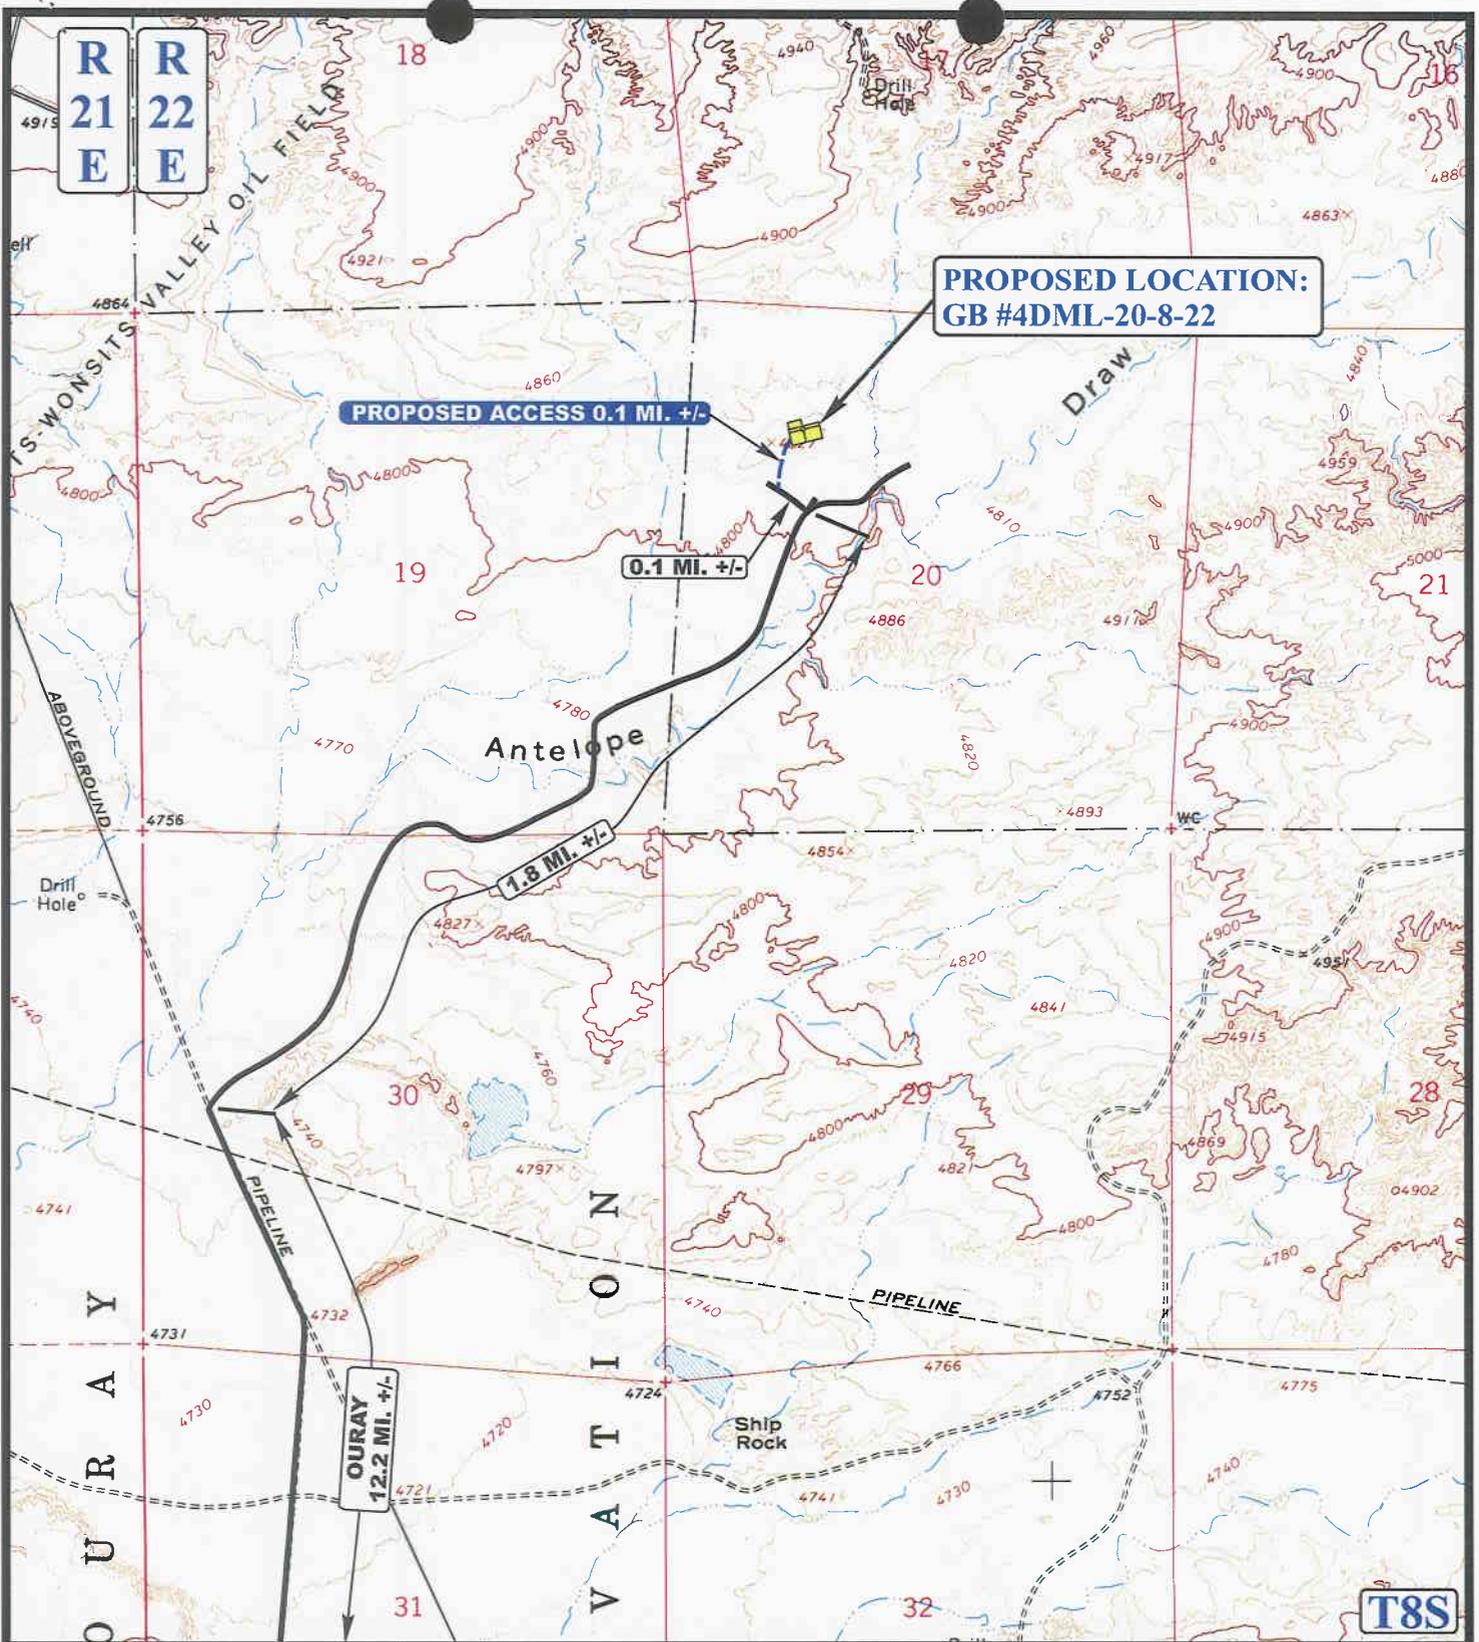

LEGEND:

- EXISTING ROAD
- PROPOSED ACCESS ROAD

QUESTAR EXPLR. & PROD.

GB #4DML-20-8-22
SECTION 20, T8S, R22E, S.L.B.&M.
1307' FNL 1235' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813




TOPOGRAPHIC
MAP

10 27 06
 MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 00-00-00



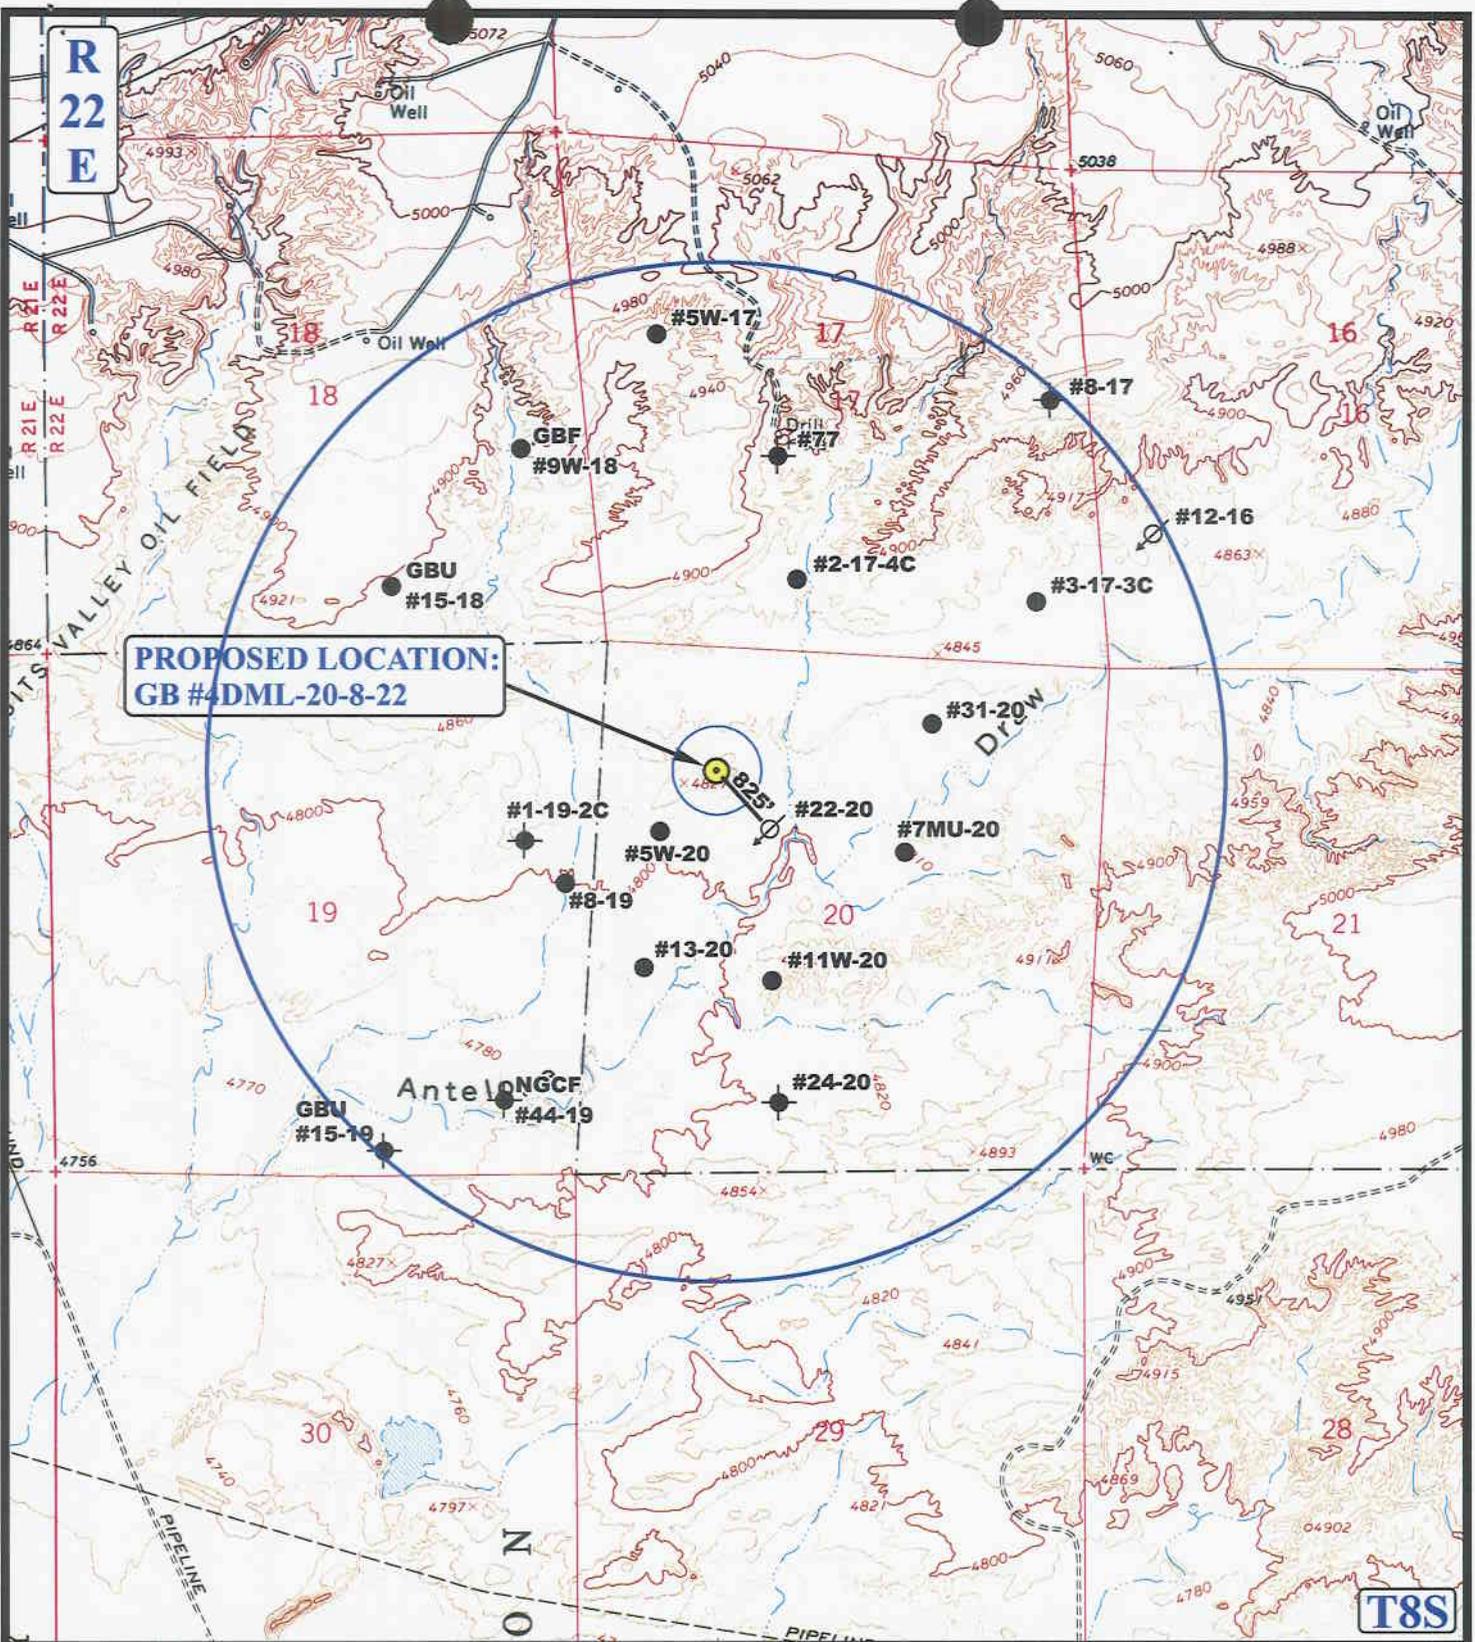

**PROPOSED LOCATION:
GB #4DML-20-8-22**

LEGEND:

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ⊗ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED



QUESTAR EXPLR. & PROD.

**GB #4DML-20-8-22
SECTION 20, T8S, R22E, S.L.B.&M.
1307' FNL 1235' FWL**



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813


**TOPOGRAPHIC
MAP**

10 27 06
MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: L.K. REV: 03-02-07A.A.



R
22
E

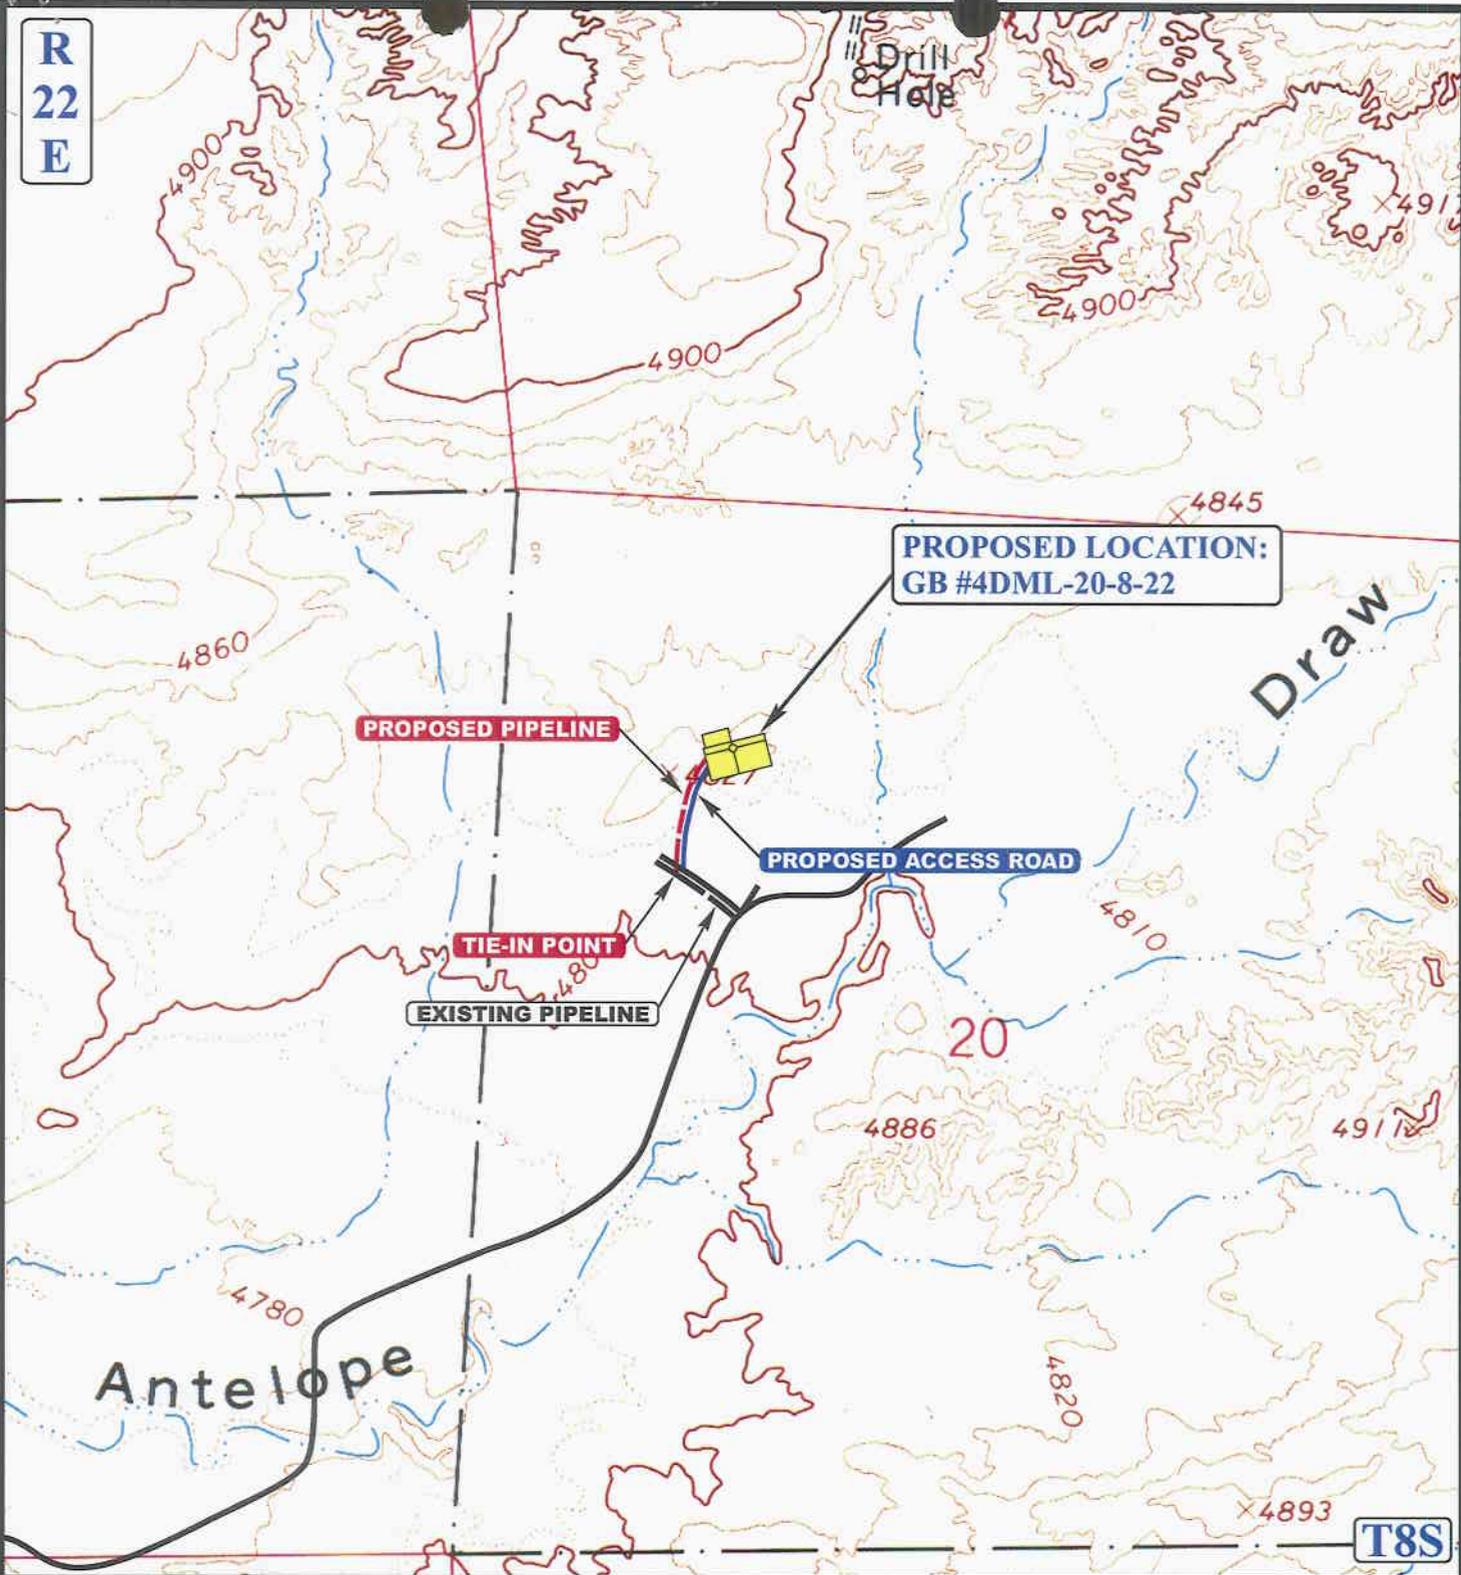

APPROXIMATE TOTAL PIPELINE DISTANCE = 628' +/-

LEGEND:

-  PROPOSED ACCESS ROAD
-  EXISTING PIPELINE
-  PROPOSED PIPELINE
-  PROPOSED PIPELINE (SERVICING OTHER WELLS)

QUESTAR EXPLR. & PROD.

GB #4DML-20-8-22
 SECTION 20, T8S, R22E, S.L.B.&M.
 1307' FNL 1235' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC MAP

10	27	06
MONTH	DAY	YEAR

SCALE: 1" = 1000' DRAWN BY: L.K. REVISED: 00-00-00



**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 04/20/2007

API NO. ASSIGNED: 43-047-39228

WELL NAME: GB 4DML-20-8-22

OPERATOR: QUESTAR EXPLORATION & (N5085)

PHONE NUMBER: 435-781-4032

CONTACT: JAN NELSON

PROPOSED LOCATION:

NWNW 20 080S 220E
 SURFACE: 1307 FNL 1235 FWL
 BOTTOM: 1307 FNL 1235 FWL
 COUNTY: UINTAH
 LATITUDE: 40.11318 LONGITUDE: -109.4674
 UTM SURF EASTINGS: 630613 NORTHINGS: 4441235
 FIELD NAME: NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal
 LEASE NUMBER: UTU-69001
 SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: MNCS
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. ESB000024)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 49-2153)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)

LOCATION AND SITING:


- ___ R649-2-3. **NON PA*
- Unit: GLEN BENCH
- ___ R649-3-2. General
- Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
- Board Cause No: 187-09
- Eff Date: 11-29-06
- Siting: 20 ACRE
- ___ R649-3-11. Directional Drill

COMMENTS:

See Separate file

STIPULATIONS:

*1. Federal Approval
2. Spacing Strip*

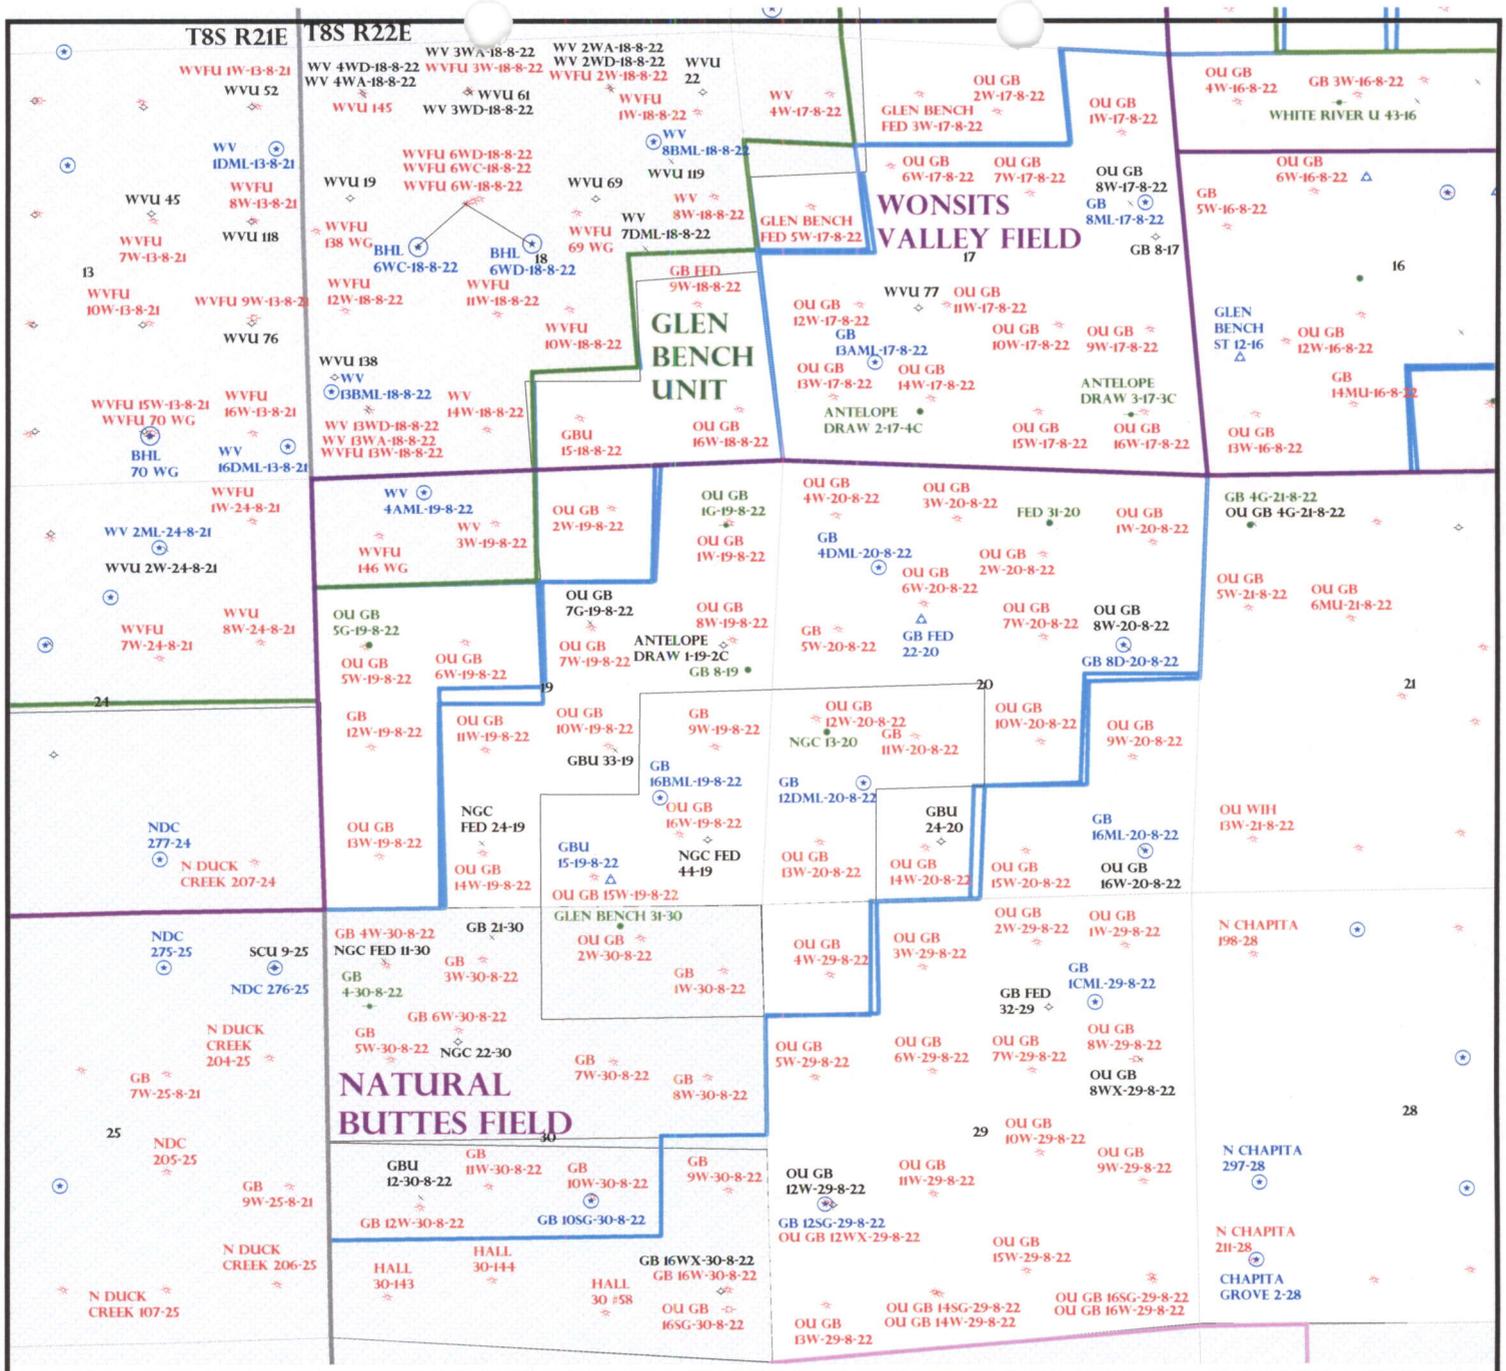

OPERATOR: QUESTAR EXPL & PROD (N5085)
 SEC: 19,20 T.8S R. 22E
 FIELD: NATURAL BUTTES (630)
 COUNTY: Uintah
 SPACING: R649-3-3 / EXCEPTION LOCATION

- Field Status**
- ABANDONED
 - ACTIVE
 - COMBINED
 - INACTIVE
 - PROPOSED
 - STORAGE
 - TERMINATED

- Unit Status**
- EXPLORATORY
 - GAS STORAGE
 - NF PP OIL
 - NF SECONDARY
 - PENDING
 - PI OIL
 - PP GAS
 - PP GEOTHERML
 - PP OIL
 - SECONDARY
 - TERMINATED

- Wells Status**
- * GAS INJECTION
 - * GAS STORAGE
 - * LOCATION ABANDONED
 - * NEW LOCATION
 - * PLUGGED & ABANDONED
 - * PRODUCING GAS
 - * PRODUCING OIL
 - * SHUT-IN GAS
 - * SHUT-IN OIL
 - * TEMP. ABANDONED
 - * TEST WELL
 - * WATER INJECTION
 - * WATER SUPPLY
 - * WATER DISPOSAL
 - * DRILLING



PREPARED BY: DIANA MASON
 DATE: 26-APRIL-2007



Questar Exploration and Production Company

11002 East 17500 South

Vernal, UT 84078

Tel 435 781 4300 • Fax 435 781 4329

April 30, 2007

Division of Oil, Gas & Mining
1594 W. N. Temple STE 1210
Salt Lake City, UT 84114-5801

To Whom It May Concern:

In reference to the State Oil and Gas Conservation rule R649-3-3 Questar Exploration & Production, Co. *GB 13AML-17-8-22, GB 16BML-19-8-22, GB 4DML-20-8-22, GB 12DML-20-8-22, GB 1CML-29-8-22, SG 11BML-23-8-22 and SG 12DML-23-8-22* is an exception to this rule due to cause 187-09. These wells will be drilled on 20 acre spacing.

There are no additional lease owners within 460' of the proposed location. If you have any questions please contact Jan Nelson @ (435) 781-4032 or Cory Miller @ 303-672-6944.

Thank you,

Jan Nelson
Regulatory Affairs



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

April 30, 2007

Questar Exploration & Production, Co.
1571 E 1700 S
Vernal, UT 84078

Re: Glen Bench 4DML-20-8-22 Well, 1307' FNL, 1235' FWL, NW NW, Sec. 20,
T. 8 South, R. 22 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

Appropriate information has been submitted to DOGM and administrative approval of the requested exception location is hereby granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-39228.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal District Office

Operator: Questar Exploration & Production, Co.
Well Name & Number Glen Bench 4DML-20-8-22
API Number: 43-047-39228
Lease: UTU-69001

Location: NW NW Sec. 20 T. 8 South R. 22 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

RECEIVED
UNITED STATES VERNAL FIELD OFFICE
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

2007 APR 17 PM 3:26

FORM APPROVED
OMB NO. 1040-0136
Expires: February 28, 1995

5. LEASE DESIGNATION AND SERIAL NO.

UTU-69001

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

N/A

7. UNIT AGREEMENT NAME

GLEN BENCH

8. FARM OR LEASE NAME, WELL NO.

GB 4DML-20-8-22

9. API NUMBER: **43-047-39228**

10. FIELD AND POOL, OR WILDCAT
NATURAL BUTTES

11. SEC., T, R, M, OR BLK & SURVEY OR AREA

SEC. 20, T8S, R22E Mer SLB

12. COUNTY OR PARISH

Uintah

13. STATE

UT

17. NO. OF ACRES ASSIGNED TO THIS WELL

20

20. BLM/BIA Bond No. on file
ESB000024

23. Estimated duration
90 days

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

TYPE OF WORK

DRILL

DEEPEEN

TYPE OF WELL

OIL WELL GAS WELL OTHER SINGLE ZONE MULTIPLE ZONE

2. NAME OF OPERATOR

QUESTAR EXPLORATION & PRODUCTION, CO.

Contact: Jan Nelson

E-Mail: jan.nelson@questar.com

3. ADDRESS

1571 E. 1700 S. Vernal, Ut 84078

Telephone number

Phone 435-781-4032 Fax 435-781-4045

4. LOCATION OF WELL (Report location clearly and in accordance with and State requirements*)

At Surface 1307' FNL 1235' FWL NWNW SECTION 20, T8S, R22E

At proposed production zone

14. DISTANCE IN MILES FROM NEAREST TOWN OR POSTOFFICE*

14 +/- EAST OF OURAY, UTAH

15. DISTANCE FROM PROPOSED LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (also to nearest drig, unit line if any)

1307' +/-

16. NO. OF ACRES IN LEASE

320.00

18. DISTANCE FROM PROPOSED location to nearest well, drilling, completed, applied for, on this lease, ft

825' +/-

19. PROPOSED DEPTH

16,877

21. ELEVATIONS (Show whether DF, RT, GR, ect.)

4815.3' GR

22. DATE WORK WILL START

ASAP

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- 1. Well plat certified by a registered surveyor.
- 2. A Drilling Plan
- 3. A surface Use Plan (if location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- 5. Operator certification.
- 6. Such other site specific information and/or plans as may be required by the authorized officer.

SIGNED Jan Nelson Name (printed/typed) Jan Nelson

DATE 4-16-07

TITLE Regulatory Affairs

(This space for Federal or State office use)

PERMIT NO. _____ APPROVAL DATE _____

Application approval does not warrant or certify the applicant holds any legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon

CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY [Signature] TITLE Assistant Field Manager
Lands & Mineral Resources

DATE 11-20-2007

*See Instructions On Reverse Side

Title 18 U.S.C Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

CONDITIONS OF APPROVAL ATTACHED

NOTICE OF APPROVAL

RECEIVED

DEC 05 2007

DIV. OF OIL, GAS & MINING

CONFIDENTIAL

NCS 2/28/07
07PP/472A



**UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE**

170 South 500 East VERNAL, UT 84078 (435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: Questar Exploration & Production Co. **Location:** NWNW, Sec 20, T8S, R22E
Well No: GB 4DML-20-8-22 **Lease No:** UTU-69001
API No: 43-047-39228 **Agreement:** Glen Bench Unit

Title	Name	Office Phone Number	Cell Phone Number
Petroleum Engineer:	Matt Baker	(435) 781-4490	(435) 828-4470
Petroleum Engineer:	Michael Lee	(435) 781-4432	(435) 828-7875
Petroleum Engineer:	James Ashley	(435) 781-4470	(435) 828-7874
Petroleum Engineer:	Ryan Angus	(435) 781-4430	(435) 828-7368
Supervisory Petroleum Technician:	Jamie Sparger	(435) 781-4502	(435) 828-3913
NRS/Enviro Scientist:	Paul Buhler	(435) 781-4475	(435) 828-4029
NRS/Enviro Scientist:	Karl Wright	(435) 781-4484	(435) 828-7381
NRS/Enviro Scientist:	Holly Villa	(435) 781-4404	
NRS/Enviro Scientist:	Chuck MacDonald	(435) 781-4441	(435) 828-7481
NRS/Enviro Scientist:	Jannice Cutler	(435) 781-3400	(435) 828-3544
NRS/Enviro Scientist:	Michael Cutler	(435) 781-3401	(435) 828-3546
NRS/Enviro Scientist:	Anna Figueroa	(435) 781-3407	(435) 828-3548
NRS/Enviro Scientist:	Verlyn Pindell	(435) 781-3402	(435) 828-3547
NRS/Enviro Scientist:	Darren Williams	(435) 781-4447	
NRS/Enviro Scientist:	Nathan Packer	(435) 781-3405	(435) 828-3545

Fax: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Location Construction (Notify NRS/Enviro Scientist)	-	Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify NRS/Enviro Scientist)	-	Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	-	Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supervisory Petroleum Technician)	-	Twenty-Four (24) hours prior to running casing and cementing all casing strings
BOP & Related Equipment Tests (Notify Supervisory Petroleum Technician)	-	Twenty-Four (24) hours prior to initiating pressure tests
First Production Notice (Notify Petroleum Engineer)	-	Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days

**SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

Surface COAs:

- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

Additional Stipulations:

- Conditions for Approval are in the APD or SOP

DOWNHOLE CONDITIONS OF APPROVAL

SITE SPECIFIC DOWNHOLE CONDITIONS OF APPROVAL

- 10¾" surface casing shall be set to 1100 feet. Adjust surface casing cement volumes to compensate for the additional footage.
- 5M BOPE (minimum) shall be installed on 10¾ inch casing.
- 10M BOPE shall be installed on 7 inch casing.
- A formation integrity test shall be performed before drilling more than twenty feet below the casing shoe on the surface and intermediate casing.
- The top of the intermediate casing cement shall extend a minimum of 200 feet above the surface casing shoe.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**

- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- Chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or

data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-69001
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A
		7. UNIT or CA AGREEMENT NAME: GLEN BENCH
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____	8. WELL NAME and NUMBER: GB 4DML-20-8-22	
2. NAME OF OPERATOR: QUESTAR EXPLORATION & PRODUCTION CO.		9. API NUMBER: 4304739228
3. ADDRESS OF OPERATOR: 11002 E. 17500 S. CITY VERNAL STATE UT ZIP 84078	PHONE NUMBER: (435) 781-4301	10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1307' FNL 1235' FWL		COUNTY: UINTAH
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NWNW 20 8S 22E		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____ <input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>APD EXTENSION</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Questar Exploration & Production Co. hereby requests a 1 year extension on the GB 4DML-20-8-22.

Approved by the
Utah Division of
Oil, Gas and Mining

COPY SENT TO OPERATOR

Date: 4.28.2008

Initials: KS

Date: 04-24-08

By: 

NAME (PLEASE PRINT) <u>Laura Bills</u>	TITLE <u>Associate Regulatory Affairs Analyst</u>
SIGNATURE 	DATE <u>4/23/2008</u>

(This space for State use only)

RECEIVED

APR 24 2008 CONFIDENTIAL

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-39228
Well Name: GB 4DML-20-8-22
Location: 1307' FNL 1235' FWL, NWNW, SEC. 20, T8S, R22E
Company Permit Issued to: Questar Exploration & Production Co.
Date Original Permit Issued: 4/30/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No


Signature

4/23/2008

Date

Title: Associate Regulatory Affairs Analyst

Representing: Questar Exploration & Production Co.

RECEIVED

APR 24 2008

DIV. OF OIL, GAS & MINING

CONFIDENTIAL

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-69001
2. NAME OF OPERATOR: QUESTAR EXPLORATION & PRODUCTION CO.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A
3. ADDRESS OF OPERATOR: 11002 E. 17500 S. CITY VERNAL STATE UT ZIP 84078		7. UNIT or CA AGREEMENT NAME: GLEN BENCH
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1307' FNL 1235' FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NWNW 20 8S 22E		8. WELL NAME and NUMBER: GB 4DML-20-8-22
PHONE NUMBER: (435) 781-4301		9. API NUMBER: 4304739228
COUNTY: UINTAH		10. FIELD AND POOL, OR WILDCAT: NATURAL BUTTES
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>APD EXTENSION</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Questar Exploration & Production Co. hereby requests a 1 year extension on the GB 4DML-20-8-22.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 04-27-09

By: [Signature]

COPY SENT TO OPERATOR

Date: 4-28-2009

Initials: KS

NAME (PLEASE PRINT) <u>Laura Bills</u>	TITLE <u>Associate Regulatory Affairs Analyst</u>
SIGNATURE <u>[Signature]</u>	DATE <u>4/20/2009</u>

(This space for State use only)

RECEIVED

APR 23 2009

CONFIDENTIAL

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-39228
Well Name: GB 4DML-20-8-22
Location: 1307' FNL 1235' FWL, NWNW, SEC. 20, T8S, R22E
Company Permit Issued to: Questar Exploration & Production Co.
Date Original Permit Issued: 4/30/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

Dana Bills
Signature

4/20/2009
Date

Title: Associate Regulatory Affairs Analyst

Representing: Questar Exploration & Production Co.

RECEIVED

APR 23 2009

DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-69001
	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: _____
	7. UNIT or CA AGREEMENT NAME: GLEN BENCH ENH REC
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: GB 4DML-20-8-22
2. NAME OF OPERATOR: QUESTAR EXPLORATION & PRODUCTION CO	9. API NUMBER: 43047392280000
3. ADDRESS OF OPERATOR: 11002 East 17500 South , Vernal, UT, 84078	PHONE NUMBER: 435 781-4362 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1307 FNL 1235 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWNW Section: 20 Township: 08.0S Range: 22.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES
	COUNTY: Uintah
	STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 4/30/2011	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: _____

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Questar Exploration and Production Company hereby requests a one year extension for the APD on the above captioned well.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: May 03, 2010

By: 

NAME (PLEASE PRINT) Jan Nelson	PHONE NUMBER 435 781-4331	TITLE Permit Agent
SIGNATURE N/A	DATE 4/28/2010	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047392280000

API: 43047392280000

Well Name: GB 4DML-20-8-22

Location: 1307 FNL 1235 FWL QTR NWNW SEC 20 TWNP 080S RNG 220E MER S

Company Permit Issued to: QUESTAR EXPLORATION & PRODUCTION CO

Date Original Permit Issued: 4/30/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

Approved by the Utah Division of Oil, Gas and Mining

Signature: Jan Nelson

Date: 4/28/2010

Title: Permit Agent Representing: QUESTAR EXPLORATION & PRODUCTION CO

Date: May 03, 2010

By:

[Handwritten signature]

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET (for state use only)

ROUTING
 CDW

Change of Operator (Well Sold)

X - Operator Name Change

The operator of the well(s) listed below has changed, effective:

6/14/2010

FROM: (Old Operator): N5085-Questar Exploration and Production Company 1050 17th St, Suite 500 Denver, CO 80265 Phone: 1 (303) 308-3048	TO: (New Operator): N3700-QEP Energy Company 1050 17th St, Suite 500 Denver, CO 80265 Phone: 1 (303) 308-3048
--	--

CA No.		Unit:		GLEN BENCH ENH REC				
WELL NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
SEE ATTACHED								

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 6/28/2010
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 6/28/2010
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 6/24/2010
- Is the new operator registered in the State of Utah: Business Number: 764611-0143
- (R649-9-2) Waste Management Plan has been received on: Requested
- Inspections of LA PA state/fee well sites complete on: n/a
- Reports current for Production/Disposition & Sundries on: ok
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 8/16/2010 BIA not yet
- Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: 8/16/2010
- Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: N/A
- Underground Injection Control ("UIC")** Division has approved UIC Form 5 Transfer of Authority to **Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: 6/29/2010

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 6/30/2010
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 6/30/2010
- Bond information entered in RBDMS on: 6/30/2010
- Fee/State wells attached to bond in RBDMS on: 6/30/2010
- Injection Projects to new operator in RBDMS on: 6/30/2010
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: ESB000024
- Indian well(s) covered by Bond Number: 965010693
- (R649-3-1) The **NEW** operator of any state/fee well(s) listed covered by Bond Number 965010695
- The **FORMER** operator has requested a release of liability from their bond on: n/a

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **NEW** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: n/a

COMMENTS:

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

5. LEASE DESIGNATION AND SERIAL NUMBER:
See attached

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
See attached

7. UNIT or CA AGREEMENT NAME:
See attached

8. WELL NAME and NUMBER:
See attached

9. API NUMBER:
Attached

10. FIELD AND POOL, OR WILDCAT:
See attached

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1 TYPE OF WELL OIL WELL GAS WELL OTHER _____

2 NAME OF OPERATOR:
Questar Exploration and Production Company *N5085*

3. ADDRESS OF OPERATOR:
1050 17th Street, Suite 500 CITY Denver STATE CO ZIP 80265 PHONE NUMBER: (303) 672-6900

4. LOCATION OF WELL
FOOTAGES AT SURFACE: See attached COUNTY: Attached
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: STATE: UTAH

11 CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: <u>6/14/2010</u>	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Operator Name Change</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12 DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Effective June 14, 2010 Questar Exploration and Production Company changed its name to QEP Energy Company. This name change involves only an internal corporate name change and no third party change of operator is involved. The same employees will continue to be responsible for operations of the properties described on the attached list. All operations will continue to be covered by bond numbers:

Federal Bond Number: 965002976 (BLM Reference No. ESB000024) *N3700*
 Utah State Bond Number: ~~965003033~~
 Fee Land Bond Number: ~~965003033~~ } *965010695*
 BIA Bond Number: ~~799446~~ *965010693*

The attached document is an all inclusive list of the wells operated by Questar Exploration and Production Company. As of June 14, 2010 QEP Energy Company assumes all rights, duties and obligations as operator of the properties as described on the list

NAME (PLEASE PRINT) Morgan Anderson TITLE Regulatory Affairs Analyst
 SIGNATURE *Morgan Anderson* DATE 6/23/2010

(This space for State use only)

RECEIVED
JUN 28 2010

DIV. OF OIL, GAS & MINING

(See Instructions on Reverse Side)

APPROVED *6/13/2010*
Earlene Russell
Division of Oil, Gas and Mining
Earlene Russell, Engineering Technician

Questar Exploration Production Company (N5085) to QEP Energy Company (N3700)
GLEN BENCH ENH REC
 effective June 14, 2010

well_name	sec	twp	rng	api	entity	mineral lease	type	stat	C
GLEN BENCH 31-30	30	080S	220E	4304731008	13727	Federal	OW	P	
WR 43-16	16	080S	220E	4304731354	5170	State	OW	P	
GB 13-20	20	080S	220E	4304731355	13727	Federal	OW	S	
GB 45-16	16	080S	220E	4304731399	13727	State	OW	P	
GB 31-20	20	080S	220E	4304731433	13727	Federal	OW	P	
GB 2-17	17	080S	220E	4304731555	13727	Federal	OW	P	
GB 3-17	17	080S	220E	4304731556	13727	Federal	OW	TA	
GB 8-19	19	080S	220E	4304732476	13727	Federal	OW	P	
GB 4-30-8-22	30	080S	220E	4304732755	13727	Federal	OW	S	
GB 11-16-8-22	16	080S	220E	4304732857	13727	State	OW	P	
GB 1MU-16-8-22	16	080S	220E	4304734656	14251	State	GW	P	
OU GB 7W-16-8-22	16	080S	220E	4304734659	13747	State	GW	P	
OU GB 1G-19-8-22	19	080S	220E	4304734696	13727	Federal	OW	P	
GB 2ML-30-8-22	30	080S	220E	4304735080	14816	Federal	GW	P	
GB 8D-20-8-22	20	080S	220E	4304737665	15977	Federal	GW	P	
GB 13AML-17-8-22	17	080S	220E	4304739227		Federal	GW	APD	C
GB 4DML-20-8-22	20	080S	220E	4304739228		Federal	GW	APD	C
GB 12DML-20-8-22	20	080S	220E	4304739229		Federal	GW	APD	C
GB 16BML-19-8-22	19	080S	220E	4304739233		Federal	GW	APD	C



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, UT 84145-0155
<http://www.blm.gov/ut/st/en.html>



IN REPLY REFER TO:
3100
(UT-922)

JUL 28 2010

Memorandum

To: Vernal Field Office, Price Field Office, Moab Field Office
From: Chief, Branch of Minerals *Robert Bankert*
Subject: Name Change Recognized

Attached is a copy of the Certificate of Name Change issued by the Texas Secretary of State and a decision letter recognizing the name change from the Eastern States Office. We have updated our records to reflect the name change in the attached list of leases.

The name change from **Questar Exploration and Production Company** into **QEP Energy Company** is effective June 8, 2010.

cc: MMS
UDOGM

RECEIVED

AUG 16 2010

DIV. OF OIL, GAS & MINERALS

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-69001
SUNDRY NOTICES AND REPORTS ON WELLS		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		7. UNIT or CA AGREEMENT NAME: GLEN BENCH ENH REC
1. TYPE OF WELL Gas Well		8. WELL NAME and NUMBER: GB 4DML-20-8-22
2. NAME OF OPERATOR: QEP ENERGY COMPANY		9. API NUMBER: 43047392280000
3. ADDRESS OF OPERATOR: 11002 East 17500 South , Vernal, Ut, 84078	PHONE NUMBER: 303 308-3068 Ext	9. FIELD and POOL or WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1307 FNL 1235 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWNW Section: 20 Township: 08.0S Range: 22.0E Meridian: S		COUNTY: UINTAH
		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 4/30/2012 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PLUG BACK <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> SI TA STATUS EXTENSION <input checked="" type="checkbox"/> APD EXTENSION <input type="checkbox"/> WILDCAT WELL DETERMINATION <input type="checkbox"/> OTHER OTHER: <input style="width: 50px;" type="text"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.		
QEP Energy Company hereby requests a one year extension for the APD on the above captioned well.		
<p style="color: red; font-weight: bold; margin: 0;">Approved by the Utah Division of Oil, Gas and Mining</p> <p style="color: red; font-weight: bold; margin: 0;">Date: <u>05/04/2011</u></p> <p style="color: red; font-weight: bold; margin: 0;">By: <u></u></p>		
NAME (PLEASE PRINT) Valyn Davis	PHONE NUMBER 435 781-4369	TITLE Regulatory Affairs Analyst
SIGNATURE N/A		DATE 5/2/2011



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047392280000

API: 43047392280000

Well Name: GB 4DML-20-8-22

Location: 1307 FNL 1235 FWL QTR NWNW SEC 20 TWNP 080S RNG 220E MER S

Company Permit Issued to: QEP ENERGY COMPANY

Date Original Permit Issued: 4/30/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Valyn Davis

Date: 5/2/2011

Title: Regulatory Affairs Analyst **Representing:** QEP ENERGY COMPANY

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-69001
1. TYPE OF WELL Gas Well	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: QEP ENERGY COMPANY	7. UNIT or CA AGREEMENT NAME: GLEN BENCH ENH REC
3. ADDRESS OF OPERATOR: 11002 East 17500 South , Vernal, Ut, 84078	8. WELL NAME and NUMBER: GB 4DML-20-8-22
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1307 FNL 1235 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWNW Section: 20 Township: 08.0S Range: 22.0E Meridian: S	9. API NUMBER: 43047392280000
9. FIELD and POOL or WILDCAT: NATURAL BUTTES	COUNTY: UINTAH
9. API NUMBER: 43047392280000	STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 4/30/2013	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

QEP ENERGY COMPANY HEREBY REQUESTS A ONE YEAR EXTENSION FOR THE APD ON THE ABOVE CAPTIONED WELL.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: May 07, 2012

By: 

NAME (PLEASE PRINT) Valyn Davis	PHONE NUMBER 435 781-4369	TITLE Regulatory Affairs Analyst
SIGNATURE N/A	DATE 4/26/2012	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047392280000

API: 43047392280000

Well Name: GB 4DML-20-8-22

Location: 1307 FNL 1235 FWL QTR NWNW SEC 20 TWNP 080S RNG 220E MER S

Company Permit Issued to: QEP ENERGY COMPANY

Date Original Permit Issued: 4/30/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

Signature: Valyn Davis

Date: 4/26/2012

Title: Regulatory Affairs Analyst Representing: QEP ENERGY COMPANY

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-69001
1. TYPE OF WELL Gas Well	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: QEP ENERGY COMPANY	7. UNIT or CA AGREEMENT NAME: GLEN BENCH ENH REC
3. ADDRESS OF OPERATOR: 11002 East 17500 South , Vernal, Ut, 84078	8. WELL NAME and NUMBER: GB 4DML-20-8-22
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1307 FNL 1235 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWNW Section: 20 Township: 08.0S Range: 22.0E Meridian: S	9. API NUMBER: 43047392280000
9. FIELD and POOL or WILDCAT: NATURAL BUTTES	COUNTY: UINTAH
9. API NUMBER: 43047392280000	STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 4/30/2014	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

QEP ENERGY COMPANY HEREBY REQUESTS A ONE YEAR EXTENSION FOR THE APD ON THE ABOVE CAPTIONED WELL.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: May 01, 2013

By: 

NAME (PLEASE PRINT) Valyn Davis	PHONE NUMBER 435 781-4369	TITLE Regulatory Affairs Analyst
SIGNATURE N/A	DATE 4/29/2013	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047392280000

API: 43047392280000

Well Name: GB 4DML-20-8-22

Location: 1307 FNL 1235 FWL QTR NWNW SEC 20 TWNP 080S RNG 220E MER S

Company Permit Issued to: QEP ENERGY COMPANY

Date Original Permit Issued: 4/30/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

Signature: Valyn Davis

Date: 4/29/2013

Title: Regulatory Affairs Analyst Representing: QEP ENERGY COMPANY

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-69001
1. TYPE OF WELL Gas Well	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: QEP ENERGY COMPANY	7. UNIT or CA AGREEMENT NAME: GLEN BENCH ENH REC
3. ADDRESS OF OPERATOR: 11002 East 17500 South , Vernal, Ut, 84078	8. WELL NAME and NUMBER: GB 4DML-20-8-22
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1307 FNL 1235 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWNW Section: 20 Township: 08.0S Range: 22.0E Meridian: S	9. API NUMBER: 43047392280000
9. FIELD and POOL or WILDCAT: NATURAL BUTTES	COUNTY: UINTAH
9. API NUMBER: 43047392280000	STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 4/30/2015	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

QEP ENERGY COMPANY HEREBY REQUESTS A ONE YEAR EXTENSION FOR THE APD ON THE ABOVE CAPTIONED WELL.

**Approved by the
 Utah Division of
 Oil, Gas and Mining
 May 05, 2014**

Date: _____
 By: 

NAME (PLEASE PRINT) Valyn Davis	PHONE NUMBER 435 781-4369	TITLE Regulatory Affairs Analyst
SIGNATURE N/A	DATE 5/1/2014	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047392280000

API: 43047392280000

Well Name: GB 4DML-20-8-22

Location: 1307 FNL 1235 FWL QTR NWNW SEC 20 TWNP 080S RNG 220E MER S

Company Permit Issued to: QEP ENERGY COMPANY

Date Original Permit Issued: 4/30/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Valyn Davis

Date: 5/1/2014

Title: Regulatory Affairs Analyst Representing: QEP ENERGY COMPANY



GARY R. HERBERT
Governor

SPENCER J. COX
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

April 30, 2015

Valyn Davis
QEP Energy Company
11002 E 17500 S
Vernal, UT 84087

43 047 39228
GB ADML-20-8-22
20 8S 22E

Re: APDs Rescinded QEP Energy Company, Uintah County

Ladies and Gentlemen:

Enclosed find the list of APDs that is being rescinded. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded as of April 29, 2015.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal

4304739227- GB 13AML-17-8-2
→ 4304739228- GB 4DML-20-22
4304739229- GB 12DML-20-22
4304739230- SG 11BML-23-22
4304739231- SG 12DML-23-22
4304738140- WVX 8ML-5-22
4304738141- WVX 6ML-5-8-22