

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU-76768
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator The Houston Exploration Company		7. If Unit or CA Agreement, Name and No.
3a. Address 1100 Louisiana Suite 2000 Houston TX, 77002	3b. Phone No. (include area code) (713)-830-6973	8. Lease Name and Well No. North Horseshoe 13-19-6-22
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface <i>28246</i> 779' FSL & 857' FWL SWSW <i>46.279514</i> At proposed prod. zone Same as above <i>44596634</i> - <i>109.491480</i>		9. API Well No. <i>43047-39288</i>
14. Distance in miles and direction from nearest town or post office* 14.5 miles south of Vernal, UT		10. Field and Pool, or Exploratory Undesignated
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 779'	16. No. of acres in lease 2,432.46	11. Sec., T. R. M. or Blk. and Survey or Area Sec. 19, T6S. R22E S.L.B.&M.
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 4,321'	19. Proposed Depth 10,500'	12. County or Parish Uintah
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 4,951' GL	22. Approximate date work will start* 04/30/2007	13. State UT
20. BLM/BIA Bond No. on file 104155044		17. Spacing Unit dedicated to this well 40 Acres
23. Estimated duration 30 Days		

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- | | |
|------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM. |

25. Signature <i>William A Ryan</i>	Name (Printed Typed) William A Ryan	Date 01/11/07
Title Agent		
Approved by (Signature) <i>Bradley G. Hill</i>	Name (Printed Typed) BRADLEY G. HILL	Date 05-09-07
Title	Office ENVIRONMENTAL MANAGER	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)

RECEIVED
MAY 07 2007
DIV. OF OIL, GAS & MINING

Federal Approval of this
Action is Necessary


T6S, R22E, S.L.B.&M.

1967 Brass Cap
0.2' High, Pile
of Stones

1967 Brass Cap
0.7' High, Pile
of Stones

1967 Brass Cap
0.7' High, Pile
of Stones

S88°30'02"W - 2645.61' (Meas.) S88°29'03"W - 2665.95' (Meas.)

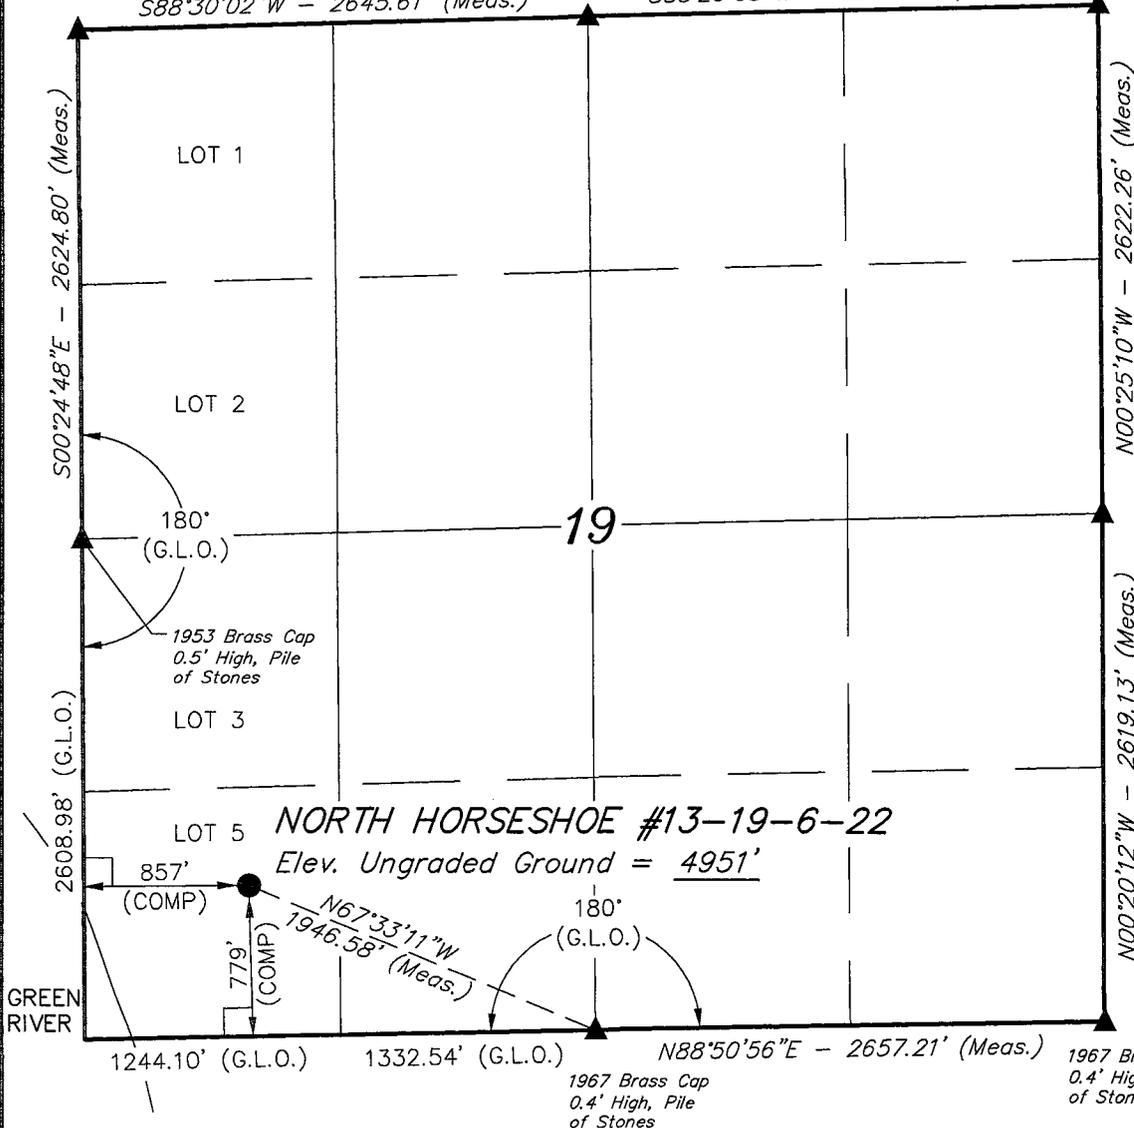

GREEN RIVER

N00°25'10"W - 2622.26' (Meas.)

N00°20'12"W - 2619.13' (Meas.)

1967 Brass Cap
1.2' High, Pile
of Stones

1967 Brass Cap
0.4' High, Pile
of Stones

1967 Brass Cap
0.4' High, Pile
of Stones

THE HOUSTON EXPLORATION COMPANY


Well location, NORTH HORSESHOE #13-19-6-22, located as shown in the SW 1/4 SW 1/4 of Section 19, T6S, R22E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

SPOT ELEVATION LOCATED AT THE NORTHWEST CORNER OF SECTION 18, T6S, R22E, S.L.B.&M. TAKEN FROM THE RASMUSSEN HOLLOW, QUADRANGLE, UTAH, UTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4738 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

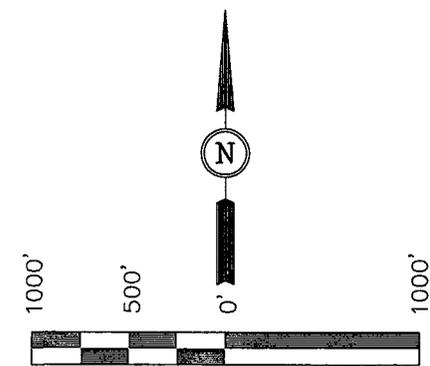

SCALE

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

[Signature]

REGISTERED LAND SURVEYOR
REGISTRATION NO. 161319
STATE OF UTAH

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(AUTONOMOUS NAD 83)
LATITUDE = 40°16'46.46" (40.279572)
LONGITUDE = 109°29'31.53" (109.492092)
(AUTONOMOUS NAD 27)
LATITUDE = 40°16'46.59" (40.279608)
LONGITUDE = 109°29'29.05" (109.491403)

UINTAH ENGINEERING & LAND SURVEYING
85 SOUTH 200 EAST - VERNAL, UTAH 84078
(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 11-5-05	DATE DRAWN: 11-7-05
PARTY BB BC ECO		REFERENCES G.L.O. PLAT
WEATHER COOL	FILE THE HOUSTON EXPLORATION COMPANY	

Ten Point Plan

The Houston Exploration Company

North Horseshoe 13-19-6-22

Surface Location SW $\frac{1}{4}$ SW $\frac{1}{4}$,

Section 19, T. 6S., R. 22E.

1. **Surface Formation**
Uintah

2. **Estimated Formation Tops and Datum:**

<u>Formation</u>		<u>Depth</u>	<u>Datum</u>
Uintah		Surface	4,951' GL
Green River		3,700'	1,251'
Birds Nest	Water	3,900'	1,051'
Wasatch	Oil/Gas	6,800'	-1,849'
Mesaverde	Oil/Gas	9,300'	-4,349'
TD		10,500'	-5,549'

A 11" hole will be drilled to 2,000' +/- . All fresh water and oil and gas bearing zones shall be protected by casing and cement program.

3. **Producing Formation Depth:**

Formation objective includes the Wasatch, Mesaverde and their sub-members.

4. **Proposed Casing:**

<u>Hole Size</u>	<u>Casing Size</u>	<u>Weight/FT</u>	<u>Grade</u>	<u>Coupling & Tread</u>	<u>Casing Depth</u>	<u>New/Used</u>
17 1/2	14	36.75#	A252		40'	NEW
11	9 5/8	36#	J-55	LT&C	2,000'	NEW
7 7/8	4 1/2	11.6#	N-80	LT&C	7,700'	NEW
7 7/8	4 1/2	13.5#	P-110	LT&C	10,500'	NEW

Cement Program:

Conductor casing #1 will be cemented as follows from 0'-40':

Note: Cement Volume = Gauge hole + 50%

<u>Casing Size</u>	<u>Cement Type</u>	<u>Cement Amounts</u>	<u>Cement Yield</u>	<u>Water Mix</u>	<u>Cement Weight</u>
Lead: 14	Portland CMT Class IA 4 Integral Air-entraining Agent	31 sks +/-	1.15ft ³ /sk	5	15.8 ppg

The Surface Casing will be cemented as follows from 0'- 2,000':

Cement volume = Gauge hole + 50%

<u>Casing Size</u>	<u>Cement Type</u>	<u>Cement Amounts</u>	<u>Cement Yield</u>	<u>Water Mix</u>	<u>Cement Weight</u>
Lead:					
9 5/8"	Premium "5" 16% Gel 10#/sk Gilsonite 3% Salt 3#/sk GB3 .25#/sk flocele	127 sks. +/-	3.82ft ³ /sk	23	11.0 ppg
Tail:					
9 5/8"	Class "G" 2% Calcium Chloride 0.25#/sk Flocele	0 sks. +/-	1.18ft ³ /sk	5	15.6 ppg
Top Job:					
	Class "G" 4% Calcium Chloride 0.25#/sk Flocele 3#/sk GB3	10-200 sks. +/-	1.15ft ³ /sk	5	15.8 ppg

Production casing will be cemented as follows from 1,800'- 10,500:

Note: Lead should be 200' above the Wasatch.

Cement volume = Gauge hole + 25%

<u>Casing Depth</u>	<u>Casing Size</u>	<u>Cement Type</u>	<u>Cement Amounts</u>	<u>Cement Yield</u>	<u>Water Mix</u>	<u>Cement Weight</u>
Lead:						
1800-6600	4 1/2 "	Premium "5" 16% Gel 10#/sk Gilsonite 3% Salt 3#/sk GB3 .25#/sk flocele	364 sks. +/-	3.82ft ³ /sk	23	11.0 ppg
Tail:						
6600-10500	4 1/2 "	Class "G" 2% Calcium Chloride 0.25#/sk Flocele	941 sks. +/-	1.18ft ³ /sk	5.2	15.6 ppg
Top Job:						
		Class "G" 4% Calcium Chloride 0.25#/sk Flocele	10-200 sks. +/-	1.15ft ³ /sk	5.2	15.8 ppg

5. BOP and Pressure Containment Data:

A 5000-psi WP BOP system as described in the BOP and Pressure Containment Data (attached) will be installed and maintained from the 11" surface casing. An upper kelly cock to the required pressure rating with a handle available shall be employed.

The BOP system including the casing will be pressure tested to minimum standards set forth in "On Shore Order #2". The BOP will be mechanically checked daily during the drilling operation.

6. Mud Program:

<u>Interval</u>	<u>Mud weight lbs./gal.</u>	<u>Viscosity Sec./OT.</u>	<u>Fluid Loss Ml/30 Mins.</u>	<u>Mud Type</u>
0-2000	Air/Clear Water	-----	No Control	Water/Gel
2000-T.D.	8.4-12.0	30-45	8-10	LSND water based mud system

Note: Mud weights may exceed 12.0 due to solids increasing at or near T.D. Increased weights are not required to control formation pressure. Operator will have on location sufficient mud and weight material to increase mud weight to 12.0 at any time while drilling the subject well. Visual mud monitoring incorporating pit level indicators shall be used.

7. Testing, Coring, Sampling and Logging:

- a) DST: None are anticipated.
- b) Coring: There is the possibility of sidewall coring.
- c) Mud Sampling: Every 10' from 2000' to T.D.
- d) Logging:

Type	Interval
DLL/SFL W/GR and SP	T.D. to Surf. Csg
FDC/CNL W/GR and CAL	T.D. to Surf. Csg

8. Abnormalities (including sour gas)

Anticipated bottom hole pressure will be less than 5000 psi. No abnormal pressures, temperatures or other hazards are anticipated. Other wells drilled in the area have not encountered over pressured zones or H2S.

9. Other facets of the proposed operation:

Off set well information

Abandoned Wells:

#1

10. Drilling Schedule:

The anticipated starting date is 4/30/2007. Duration of operations is expected to be 30 days.

Surface Casing Cement Data					
	Csg Size In.	Hole Size In.	Ft Hole	Cuft/ft	Bbls/ft
Lead	9 5/8	13 5/8	40	0.4867	0.0870
Lead	9 5/8	11	1960	0.1547	0.0275
Tail	0	0	0	0.0000	0.0000



Production Casing						
	Casing Size	Cement Type	Cement Amount	Cement Yield	Mix Water	Cement Weight
			Sks	Cuft/sk	Gal/sk	Ppg
Lead	4 1/2	Premium 5	364	3.82	23	11
Top	1800	16% Gel				
Bottom	6600	10 #/sk gilsonite				
		3% Salt				
		.25 #/sk flocele				
		3 #/sk GB3				
Tail	4 1/2	Class "G"	941	1.18	5.2	15.6
Top	6600	2% Calcium Chloride				
Bottom	10500	.25 #/sk flocele				
Top Job		Class "G"	10-200 sks	1.15	5.2	15.8
		4% Calcium Chloride				
		.25 #/sk flocele				
		3 #/sk GB3				

Production Cement Volume Calculation							
	Top	Bottom	Ft/hole	Hole Volume Cuft	Hole Volume Bbls	Cement Amount sks	Cement Amount w/25% Excess
Lead	1800	2000	200	65	12	17	21
Lead	2000	6600	4600	1048	187	274	343
						Total	364
Tail	6600	10500	3900	888	158	753	941

Factor
1.25

Production Casing Cement Data					
	Csg Size In.	Hole Size In.	Ft Hole	Coeff Cuft/ft	Coeff Bbls/ft
Lead	4 1/2	8.921	200	0.3236	0.0576
Lead	4 1/2	7.716	4.600	0.2278	0.0405
Tail	4 1/2	7.718	3.900	0.2278	0.0405

BOPE Diagram 5000 psi WP

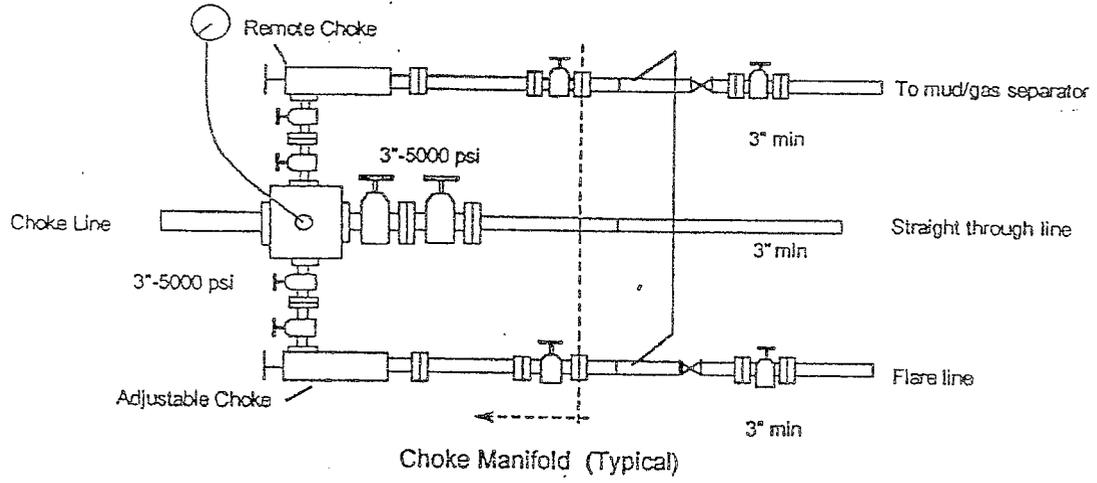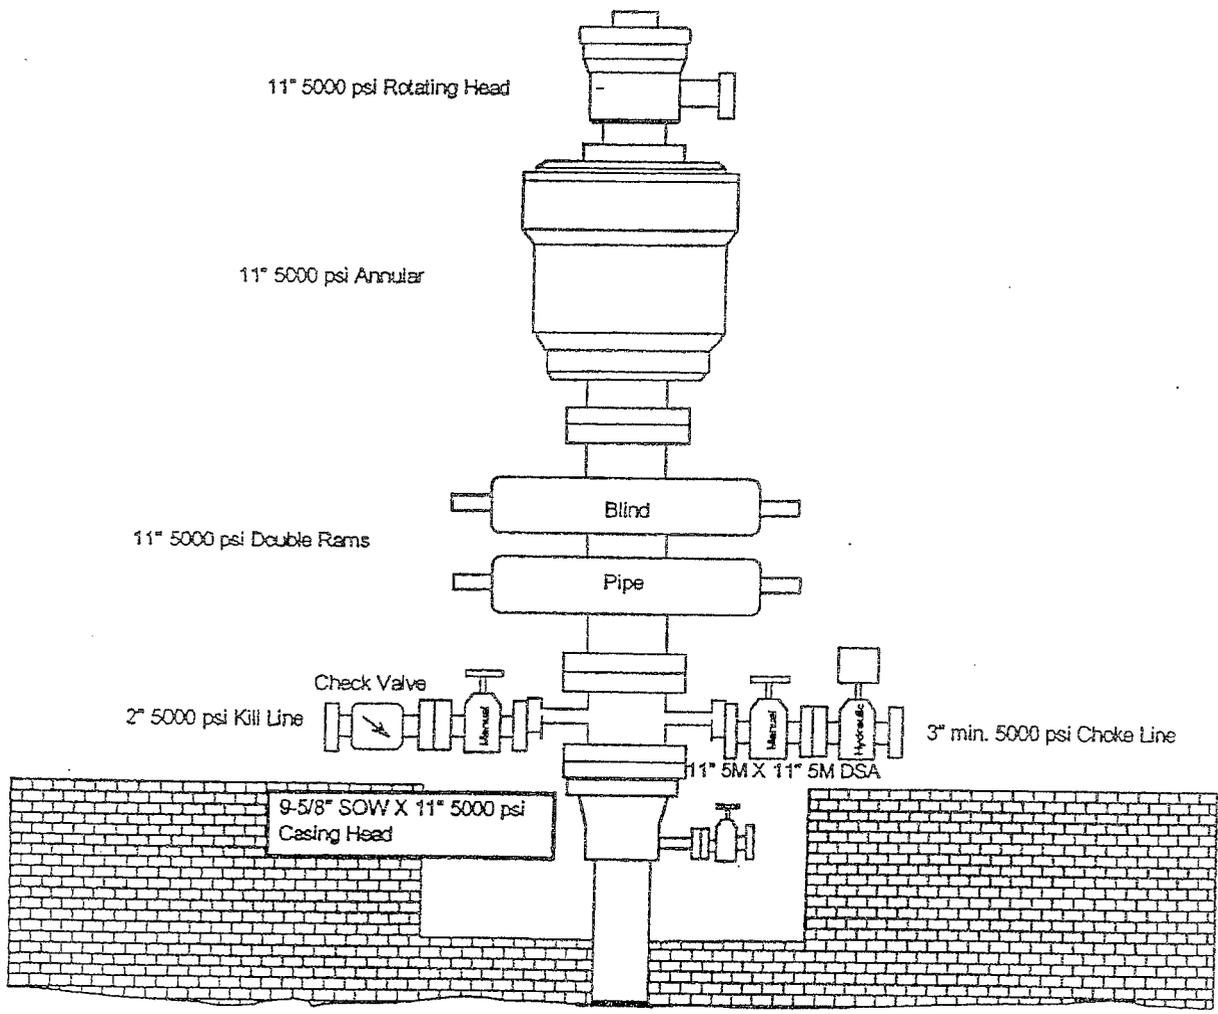

THE HOUSTON EXPLORATION COMPANY

13 POINT SURFACE USE PLAN

FOR WELL

NORTH HORSESHOE 13-19-6-22

LOCATED IN SW $\frac{1}{4}$ SW $\frac{1}{4}$

SECTION 19, T.6S, R22E, S.L.B.&M.

UINTAH COUNTY, UTAH

LEASE NUMBER: UTU-76768

SURFACE OWNERSHIP: FEDERAL

1. Existing Roads:

**The Houston Exploration Co.
North Horseshoe 13-19-6-22
Section 19, T6S, R 22E**

Starting in Vernal, Utah: Proceed in an easterly, then southerly direction from Vernal, Utah along U.S. Highway 40 approximately 3.9 miles to the junction of State Highway 45; exit right and proceed in a southerly, then southeasterly direction approximately 9.2 miles on State Highway 45 to the junction of this road and an existing two-track to the northwest; turn right and proceed in a northwesterly direction approximately 250' to the beginning of the proposed access for the #13-20-6-22 to the southeast; follow road flags in a southeasterly direction approximately 0.2 miles to the beginning of the proposed access for the #7-19-6-22 to the west; follow road flags in a westerly, then southwesterly direction approximately 0.5 miles to the beginning of the proposed access to the southwest; follow road flags in a southwesterly then westerly direction approximately 0.7 miles to the proposed location.

Total distance from Vernal, Utah to the proposed well location is approximately 13.85 miles.

All existing roads to the proposed location are State of Utah, BLM maintained or County Class D roads. Please see the attached map for additional details.

2. Planned access road

The proposed access road will be approximately 3696' of new construction on lease. The road will be graded once per year minimum and maintained.

- A) Approximate length 3696 ft
- B) Right of Way width 30 ft
- C) Running surface 18 ft
- D) Surface material Native soil
- E) Maximum grade 8%
- F) Fence crossing None
- G) Culvert None
- H) Turnouts None
- I) Major cuts and fills None
- J) Road Flagged Yes
- K) Access road surface ownership
Federal
- L) All new construction on lease
Yes
- M) Pipe line crossing None

Please see the attached location plat for additional details.

An off lease right-of-way will not be required.

All surface disturbances for the road and location will be within the lease boundary.

3. Location of existing wells

The following wells are located within a one-mile radius of the location site.

- A) Producing well None
- B) Water well None
- C) Abandoned well
#1
- D) Temp. abandoned well None
- E) Disposal well None

- F) Drilling /Permitted well None
- G) Shut in wells None
- H) Injection well None
- I) Monitoring or observation well None

Please see the attached map for additional details.

4. Location of tank batteries, production facilities and production gathering service lines.

All production facilities are to be contained within the proposed location site. Please see the attached plat plan for a typical gas well separator installation and well site piping.

All permanent (on site for more than six months or longer) structures constructed or installed will be painted a **Carlsbad Canyon** color. Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded. The required paint color is **Carlsbad Canyon**.

All tanks will be surrounded by a dike of sufficient capacity to contain the storage capacity of the largest tank in the battery. The integrity of the dike will be maintained.

The operator will adhere to all site security guidelines and regulation identified in 43 CFR 3126.7.

All off lease storage, off lease measurement, commingling on lease or off lease, of production, will have prior written approval from the authorized officer.

If the well is capable of economic production a surface gas line will be required.

Approximately 3550' of 3" steel buried gas gathering line would be constructed on Federal Lands. The line will tie into a proposed pipeline for the NH 7-19-6-22 in Section 19, T6S, R22E. The pipeline would be strung and buried to the north & west of the location and parallel to the access road. A 15' permanent right-of-way will be required and a 45' right-of-way will be necessary during construction for one week.

An off lease right-of-way will not be required.

Please see the attached location diagrams for pipeline location.

The gas meter run will be located within 500' of the wellhead. The gas line will be buried or anchored down from the wellhead to the meter. Meter runs will be housed and/or fenced.

The gas meter will be calibrated and the tank strapped in place prior to any deliveries. Tests for meter accuracy will be conducted monthly for the first three months on new meter installations and at least quarterly thereafter. The authorized officer will be provided with a date and time for the initial meter calibration and all future meter-proving schedules. A copy of the meter calibration report will be submitted to the BLM's Vernal District office and State of Utah,

Division of Oil, Gas, and Mining.
All measurement facilities will conform to API (American Petroleum Institute) and AGA (American Gas Association) standards for gas and liquid hydrocarbon measurement.

5. Location and type of water supply

Water for drilling and cementing will come from a municipal source in Vernal UT at 333 south 1000 East.

6. Source of construction materials

All construction material for this location site and access road shall be borrow material accumulated during construction of the location site and access road. Additional road gravel or pit lining material will be obtained from private resources.

7. Methods for handling waste disposal

A) Pit construction and liners:

The reserve pit will be approximately **12 ft.** deep and most of the depth shall be below the surface of the existing ground. Please see the attached plat for details.

The reserve pit will be lined.

The reserve pit will be used to store water for drilling. A semi-closed system will be used to drill the well. All fresh water for drilling will come from a frac

tank placed on location and from the rig tank. The pit will be used to hold non-flammable materials such as cuttings, salt, drilling fluids, chemicals, produced fluids, etc.

B) Produced fluids:

Produced water will be confined to the reserve pit or, if deemed necessary, a storage tank for a period not to exceed 90 days after initial production. During the 90-day period an application for approval for permanent disposal method and location will be submitted to the authorized officer. **Evaporation may be used instead of trucking to facilitate closing and reclamation of the reserve pit. A pumping system would be used for evaporation.**

C) Garbage:

A trash cage fabricated from expanded metal will be used to hold trash on location and will be removed to an authorized landfill location.

D) Sewage:

A portable chemical toilet will be supplied for human waste.

E) Site clean-up:

After the rig is moved off the location the well site area will be cleaned and all refuse removed.

8. Ancillary facilities

There are no ancillary facilities planned at this time and none are foreseen for the future.

9. Well-site layout

Location dimensions are as follows:

- A) Pad length 345 ft.
- B) Pad width 245 ft.
- C) Pit depth 12 ft.
- D) Pit length 150 ft.
- E) Pit width 75 ft.
- F) Max cut 20.6 ft.
- G) Max fill 39.3 ft.
- H) Total cut yds. 23,080 cu yds
- I) Pit location East end
- J) Top soil location North end
- K) Access road location North end
- L) Flare Pit Corner C

Please see the attached location diagram for additional details.

All pits will be fenced according to the following minimum standards:

- A) Thirty nine inch net wire shall be used with at least one strand of wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.
- B) The net wire shall be no more than 2 inches above the ground. The barbed wire shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.

C) Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

D) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 ft.

E) All wire shall be stretched by using a stretching device before it is attached to the corner posts.

10. Plans for restoration of the surface

Prior to construction of the location, the top 6 inches of soil material will be stripped off the location and the pit area. The topsoil removed and piled will amount to approximately **1,930** cubic yards of material. Topsoil will be stockpiled in one distinct pile. Placement of the topsoil is noted on the attached location plat. The topsoil pile from the location will be seeded as soon as the soil is stock piled with the seed mix listed. When all drilling and completion activities have been completed and the pit back-filled the topsoil from the pit area will be spread on the pit area. The pit area will be seeded when the soil has been spread. **The unused portion of the location (the area outside the dead men) will be re-contoured.**

The dirt contractor will be provided with an approved copy of the

surface use plan prior to construction activities.

Changes to the drainage during the construction activities shall be restored to its original line of flow or as near as possible when the pit is back-filled.

All disturbed areas will be re-contoured to the approximate natural contours. Prior to back filling the pit the fences around the reserve pit will be removed.

The reserve pit will be reclaimed within 90 days of well completion. If the reserve pit has not dried sufficiently to allow back filling, an extension on the time requirement for back filling the pit will be requested. Once reclamation activities have begun, they shall be completed within 30 days.

After the reserve pit has been reclaimed, no depressions in the soil covering the reserve pit will be allowed. The objective is to keep seasonal rainfall and run off from seeping into the soil used to cover the reserve pit. Diversion ditches and water bars will be used to divert the run off as needed.

When restoration activities have been completed, the location site and new access road cuts and shoulders shall be reseeded. Prior to reseeded, all disturbed areas will be scarified and left with a rough surface.

A) Seeding dates:

Seed will be spread when topsoil is stock piled and when reclamation work is performed.

The seed mix and quantity list will be used whether the seed is broadcast or drilled.

B) Interim Seed Mix

4#/acre Indian Rice Grass

4#/acre Crested Wheat Grass

4#/acre Needle & Thread Grass

11. Surface ownership:

Access road	Federal
Location	Federal
Pipe line	Federal

12. Other information:

A) Vegetation

The vegetation coverage is slight. The majority of the existing vegetation consists of non-native species. Rabbit brush, bitter brush, and Indian Rice grass and Sagebrush are also found on the location.

B) Dwellings:

There are no dwellings or other facilities within a one-mile radius of the location.

C) Archeology:

The location has been surveyed. A copy of that survey will be forwarded to your office.

If, during operations, any archaeological or historical sites, or any objects of antiquity (subject to the antiquities act of June 8, 1906) are discovered, all operations, which would affect such sites, will be suspended and the discovery reported promptly to the surface management agency.

At least twenty-four (24) hours prior to running casing and cementing all casing strings.

- e) BOP and related equipment tests
At least twenty-four (24) hours prior to initial pressure tests.
- f) First production notice
Within five (5) business days after the new well begins, or production resumes after well has been off production for more than 90 days.

D) Water:

The nearest water is the Green River located 1,400' +/- to the west.

E) Chemicals:

No pesticides, herbicides or other possible hazardous chemicals will be used without prior application.

G) Flare pit:

The flare pit will be located in **corner C** of the reserve pit out side the pit fences and 100 feet from the bore hole on the east side of the location. All fluids will be removed from the pit within 48 hours of occurrence.

F) Notification:

- a) Location Construction
At least forty eight (48) hours prior to construction of location and access roads.
- b) Location completion
prior to moving on the drilling rig.
- c) Spud notice
At least twenty-four (24) hours prior to spudding the well.
- d) Casing string and cementing

13. Lessees or Operator's representative and certification

A) Representative

William A. Ryan
Rocky Mountain Consulting
290 S 800 E
Vernal, UT 84078

Office 435-789-0968
Fax 435-789-0970
Cellular 435-828-0968

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws,

regulations, onshore oil and gas orders, and any applicable notices to lessees. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance.

This drilling permit will be valid for a period of one year from the date of approval. After permit termination, a new application will be filed for approval for any future operations.

B) Certification:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill-site and access route that I am familiar with the conditions which presently exist, that the statements made in this plan are, to the best of my knowledge and belief, true and correct, and that the work associated with the operation proposed herein will be preformed by The Houston Exploration Company and its contractors and subcontractors in conformity with this plan and terms and conditions with this plan and the terms and conditions under which it is approved.

Onsite Dates: 1/31/06

Self Certification Statement

The following self-certification statement is provided per Federal requirements dated June 15, 1988.


Please be advised that The Houston Exploration Company is considered to be the operator of the following well:

**North Horseshoe #13-19-6-22
Section 19, T. 6S, R. 22E
SW ¼ of the SW ¼
Lease UTU-76768
Uintah County, Utah**

The Houston Exploration Company is responsible under the terms and conditions of the lease for the operations conducted upon the lease lands.

Bond UTU-104155044 provides state-wide bond coverage on all Federal Lands.

Date 5/4/07


William A. Ryan, Agent
Rocky Mountain Consulting

Statement of use of Hazardous Materials

No chemical(s) from the EPA's consolidated list of Chemicals subject to Reporting under Title III of the Superfund Amendments and Reauthorization, Act (SARA) of 1986 will be used, produced, transported, stored, disposed, or associated with the proposed action. No extremely hazardous substances, as defined in 40 cfr 355, will be used, produced, stored, transported, disposed, or associated with the proposed action.

If you require additional information please contact:

William A Ryan
Agent for The Houston Exploration Company
Rocky Mountain Consulting
290 S 800 E
Vernal, UT 84078

435-789-0968 Office
435-828-0968 Cell
435-789-0970 Fax

THE HOUSTON EXPLORATION COMPANY
NORTH HORSESHOE #13-19-6-22
 LOCATED IN UINTAH COUNTY, UTAH
 SECTION 19, T6S, R22E, S.L.B.&M.

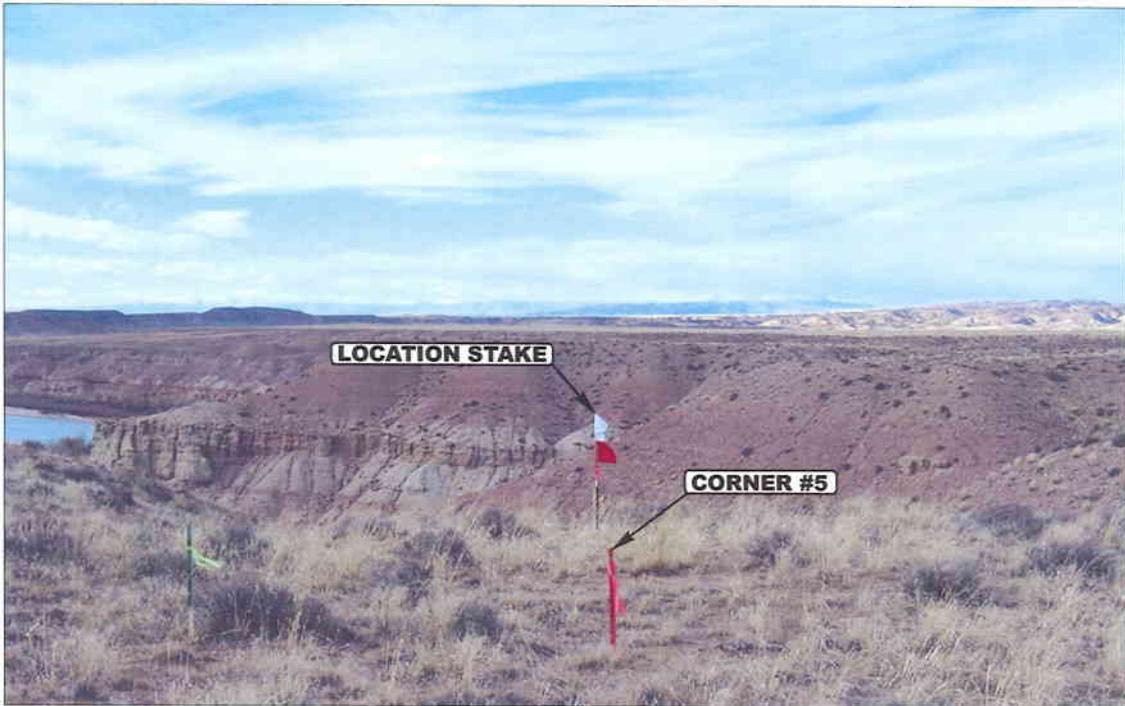


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: SOUTHWESTERLY




- Since 1964 -

UELS Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 435-789-1017 uels@uelsinc.com

LOCATION PHOTOS			11	08	05	PHOTO
			MONTH	DAY	YEAR	
TAKEN BY: B.B.	DRAWN BY: C.H.	REVISED: 00-00-00				


THE HOUSTON EXPLORATION COMPANY

LOCATION LAYOUT FOR
 NORTH HORSESHOE #13-19-6-22
 SECTION 19, T6S, R22E, S.L.B.&M.
 779' FSL 857' FWL

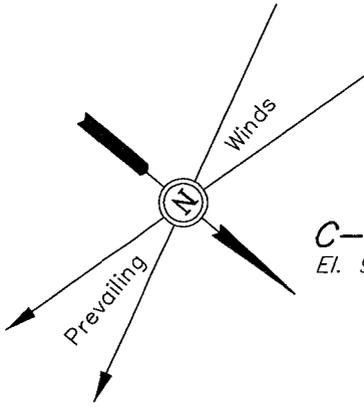

SCALE: 1" = 50'
 DATE: 11-07-05
 Drawn By: E.C.O.

NOTE:
 Flare Pit is to be located
 a min. of 100' from the
 Well Head.

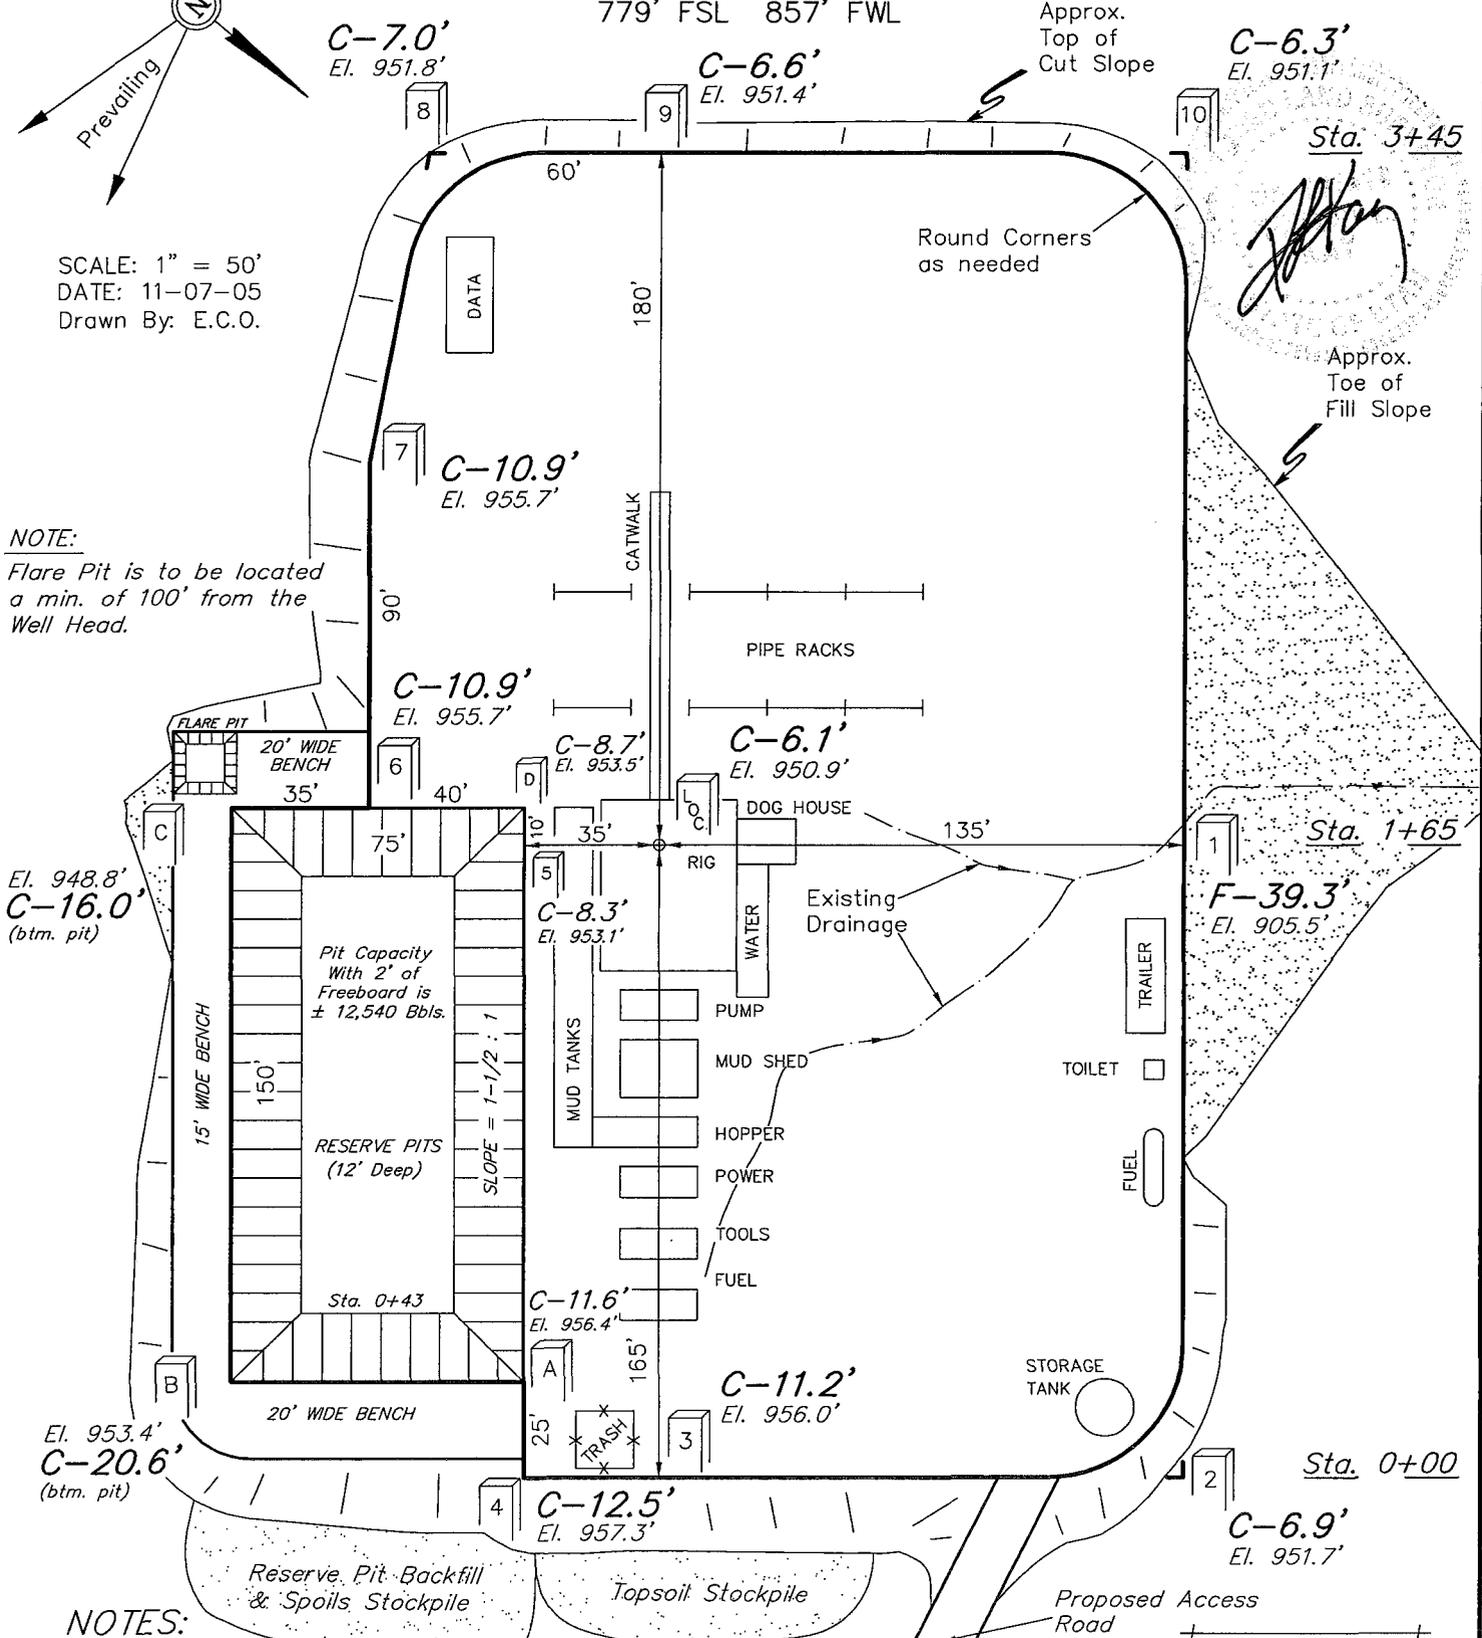

NOTES:



Elev. Ungraded Ground At Loc. Stake = 4950.9'
 FINISHED GRADE ELEV. AT LOC. STAKE = 4944.8'

THE HOUSTON EXPLORATION COMPANY

TYPICAL CROSS SECTIONS FOR
 NORTH HORSESHOE #13-19-6-22
 SECTION 19, T6S, R22E, S.L.B.&M.
 779' FSL 857' FWL

1" = 20'
 X-Section
 Scale
 1" = 50'

DATE: 11-07-05
 Drawn By: E.C.O.

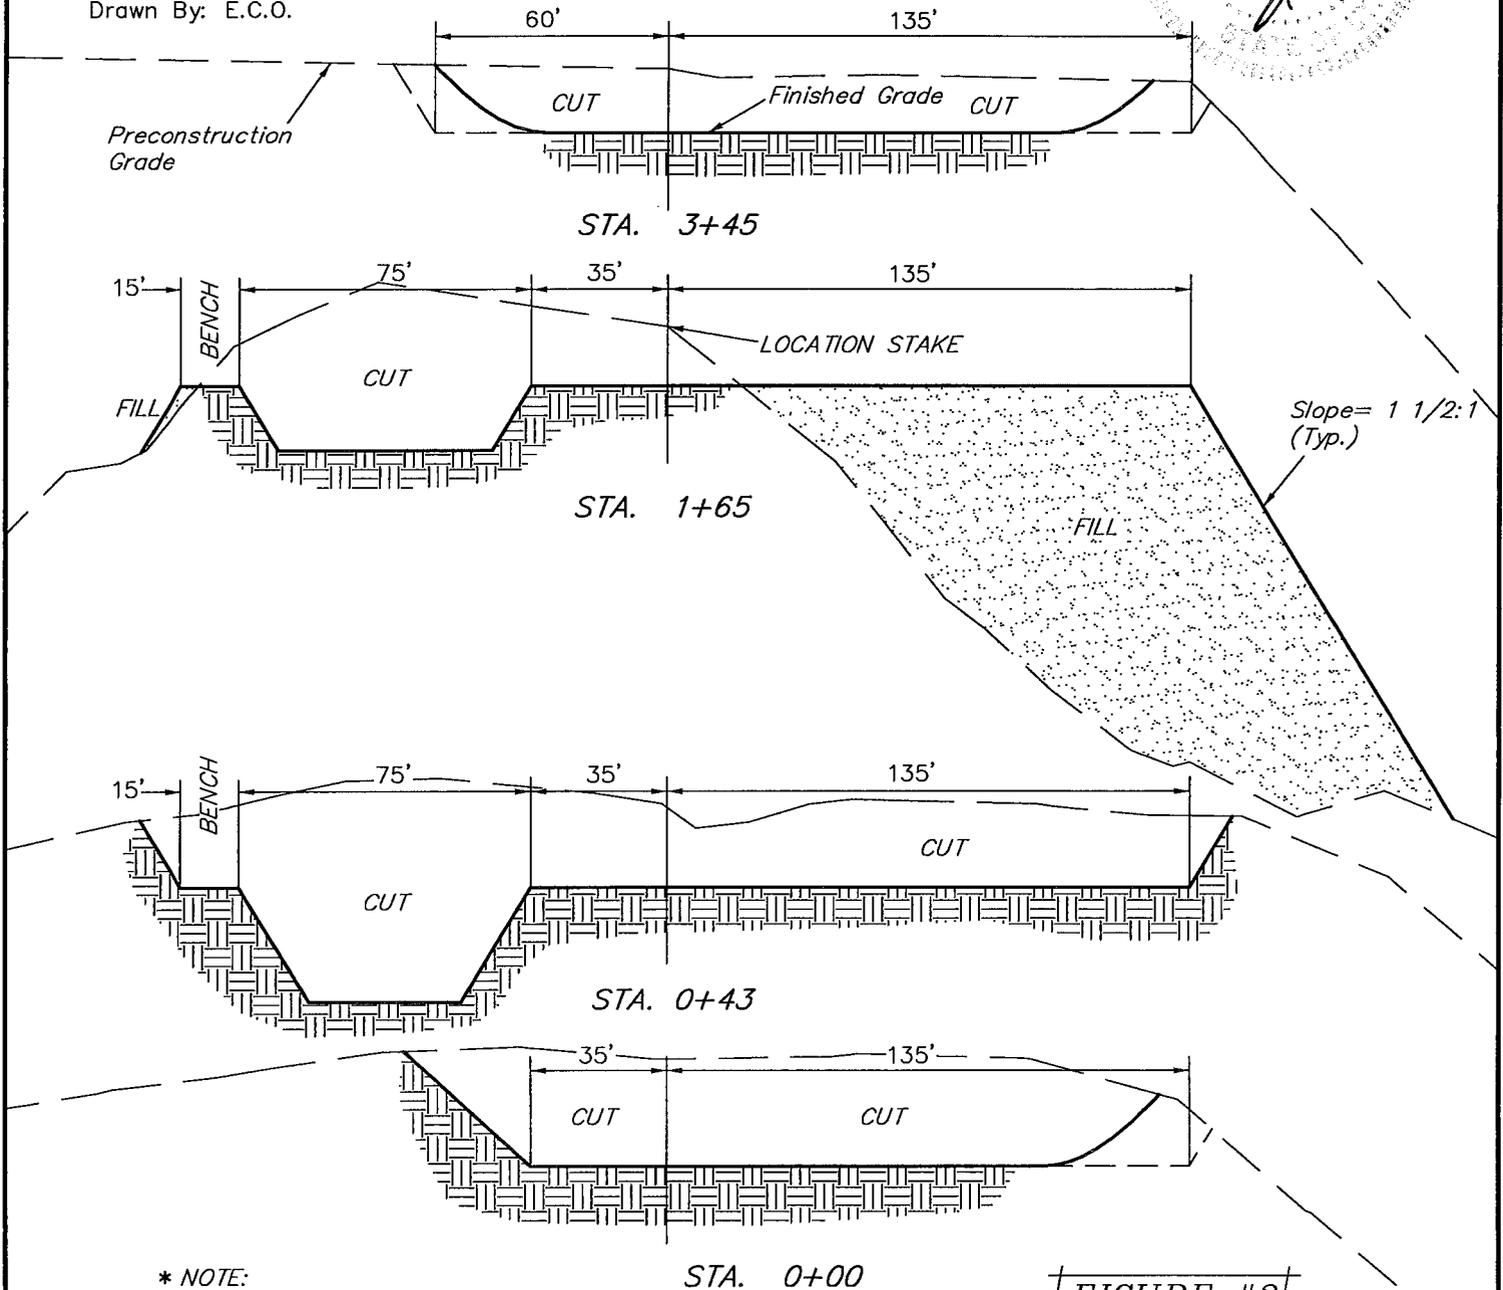


* NOTE:
 FILL QUANTITY INCLUDES
 5% FOR COMPACTION

FIGURE #2

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,930 Cu. Yds.
Remaining Location	= 21,150 Cu. Yds.
TOTAL CUT	= 23,080 CU.YDS.
FILL	= 16,290 CU.YDS.

EXCESS MATERIAL	= 6,790 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,630 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 3,160 Cu. Yds.

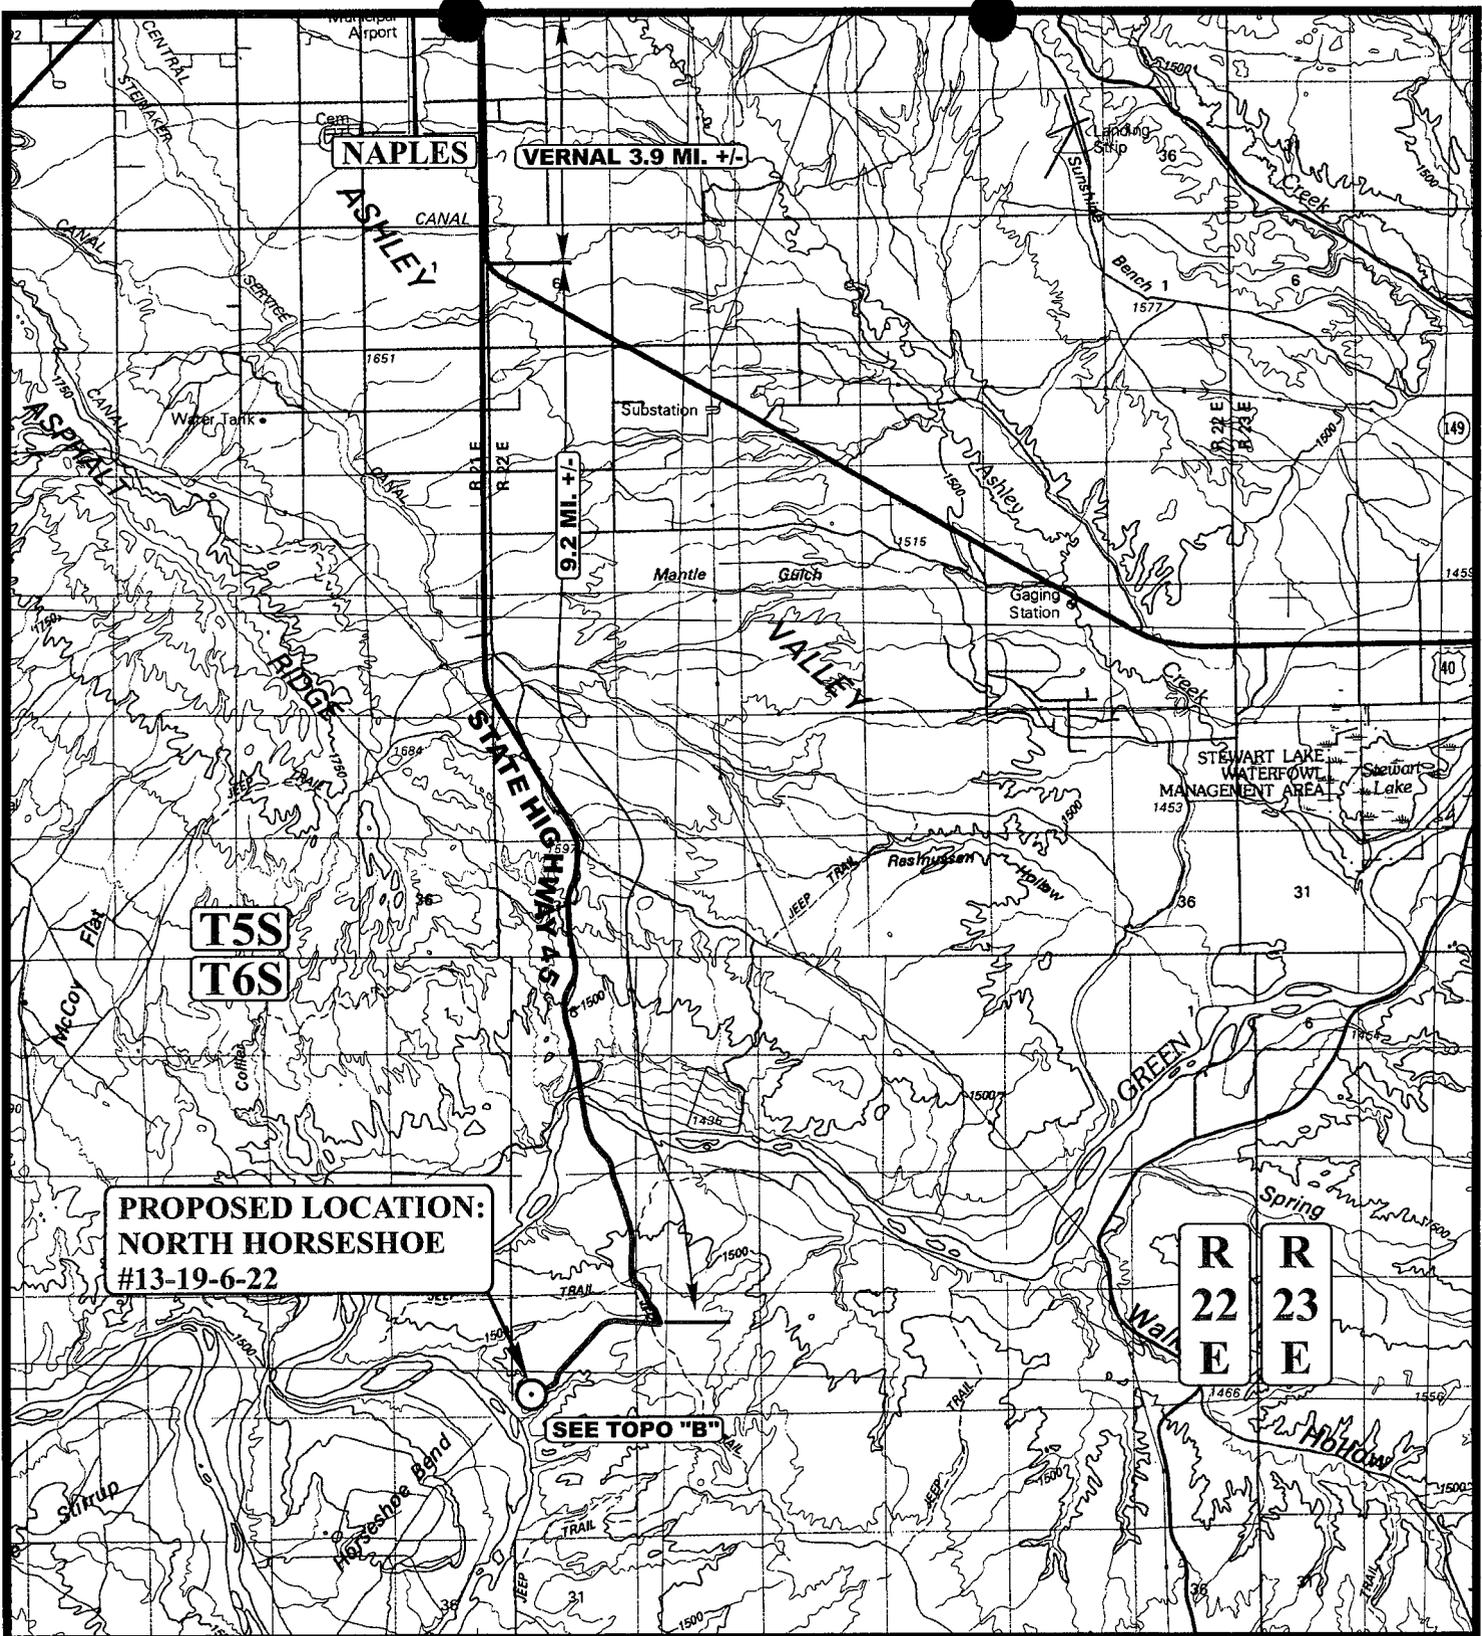

**PROPOSED LOCATION:
NORTH HORSESHOE
#13-19-6-22**

SEE TOPO "B"

LEGEND:

⊙ PROPOSED LOCATION



Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813



THE HOUSTON EXPLORATION COMPANY


**NORTH HORSESHOE #13-19-6-22
SECTION 19, T6S, R22E, S.L.B.&M.
779' FSL 857' FWL**

**TOPOGRAPHIC
MAP**

**11 08 05
MONTH DAY YEAR**

SCALE: 1:100,000 | DRAWN BY: C.H. | REVISED: 00-00-00



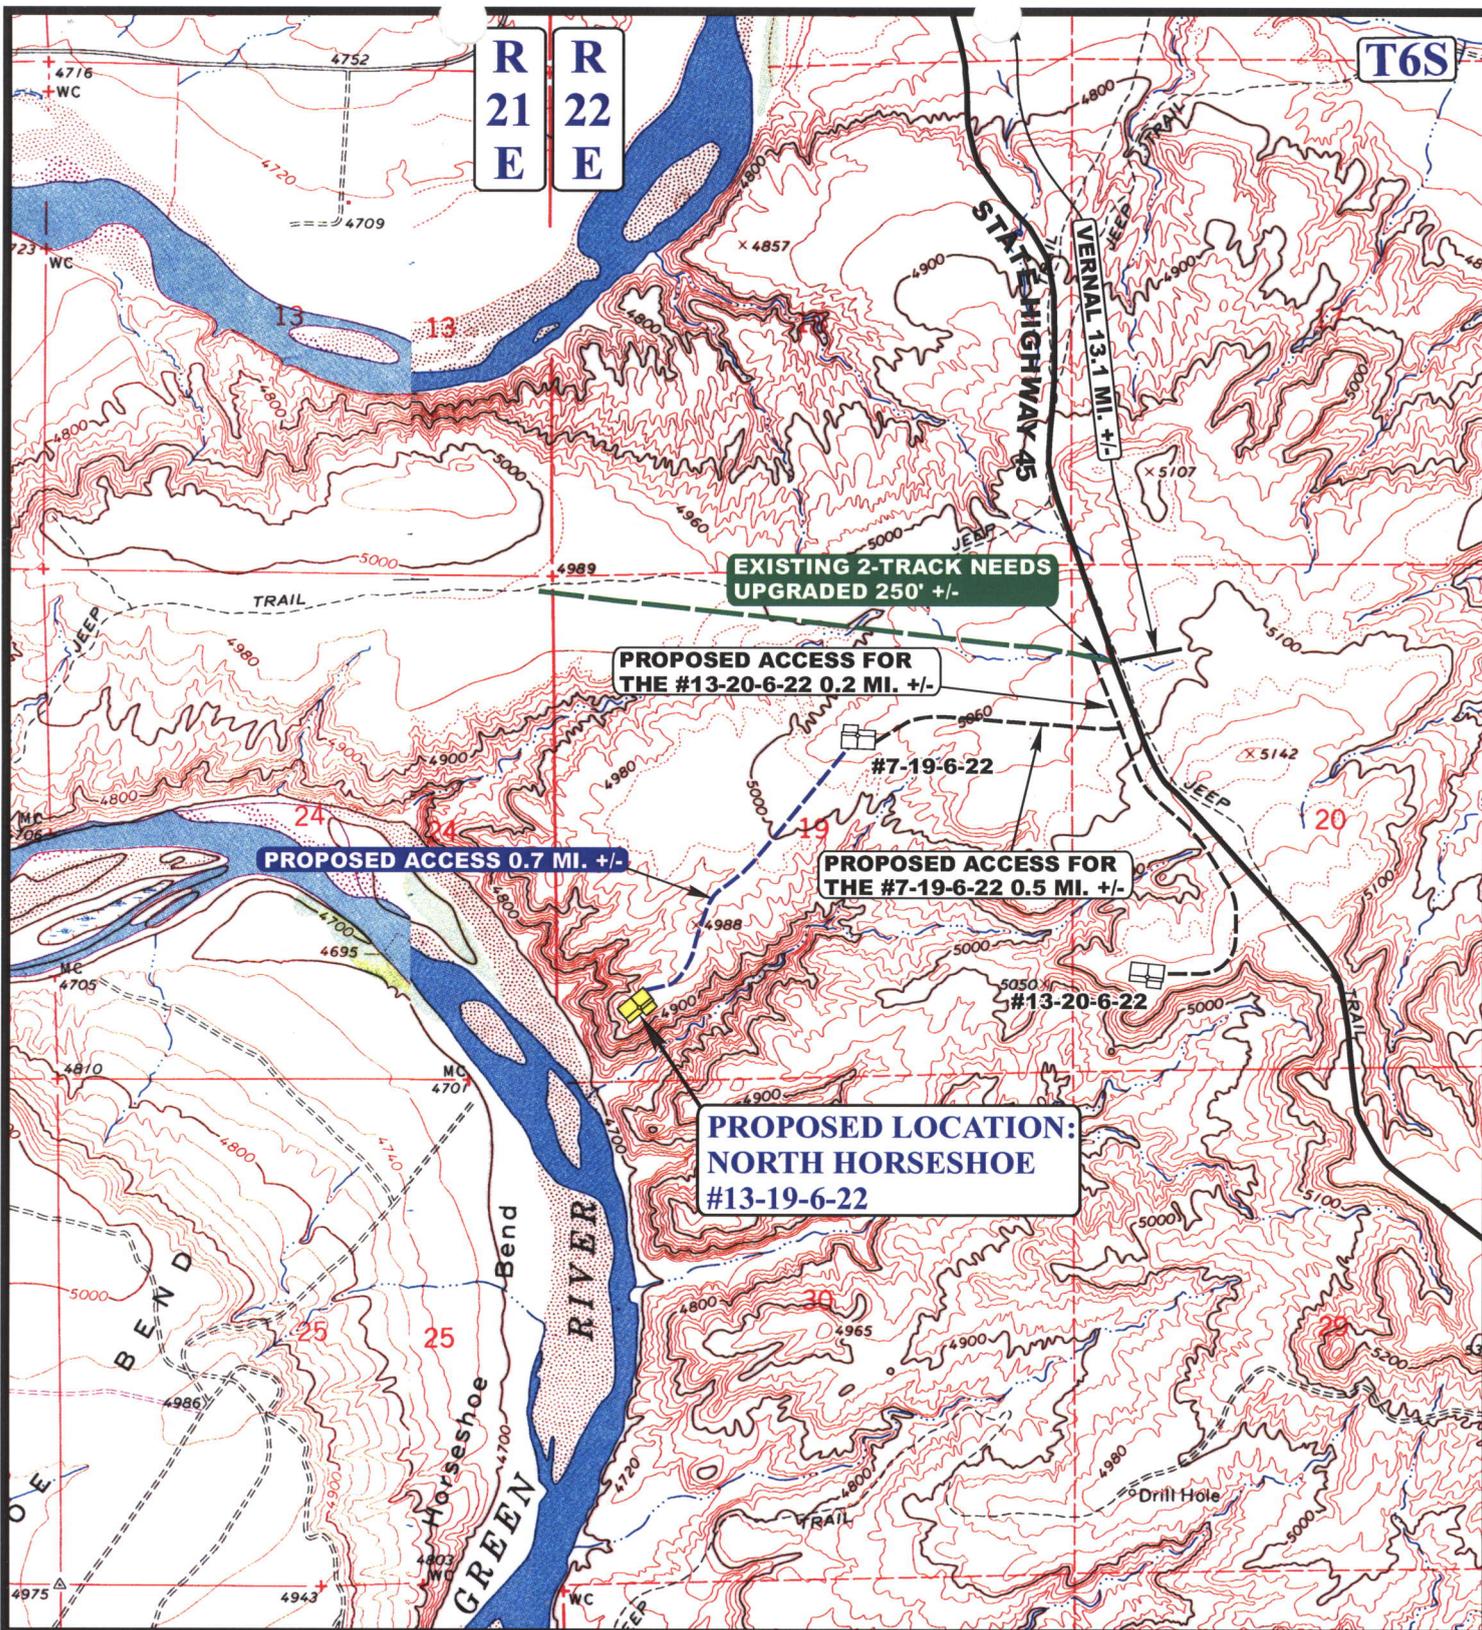

LEGEND:

- EXISTING ROAD
- PROPOSED ACCESS ROAD
- EXISTING 2-TRACK NEEDS UPGRADED



THE HOUSTON EXPLORATION COMPANY


NORTH HORSESHOE #13-19-6-22
SECTION 19, T6S, R22E, S.L.B.&M.
779' FSL 857' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC **11 08 05**
MAP MONTH DAY YEAR
 SCALE: 1" = 2000' DRAWN BY: C.H. REVISED: 00-00-00



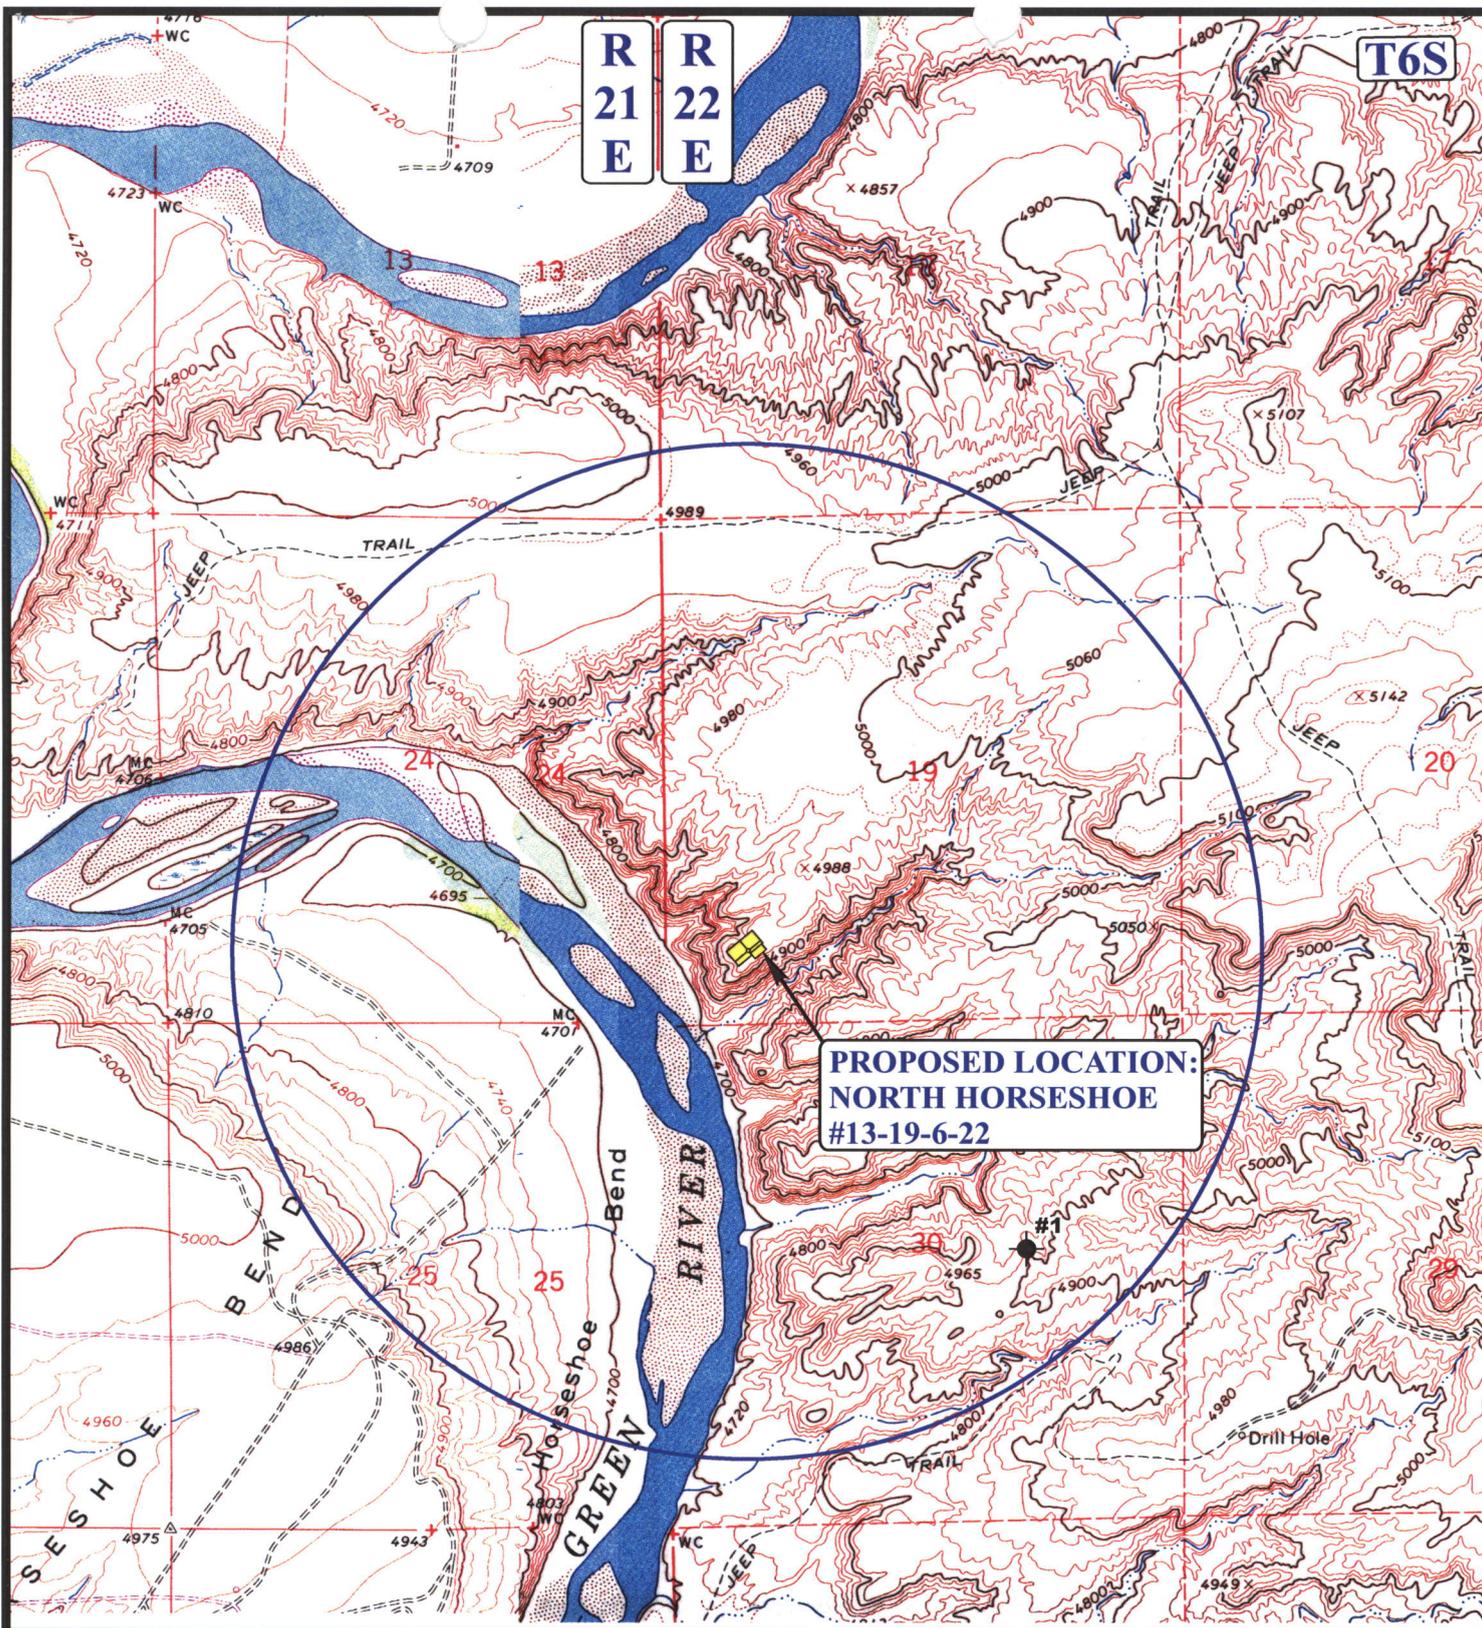

**R
21
E**

**R
22
E**

T6S

**PROPOSED LOCATION:
NORTH HORSESHOE
#13-19-6-22**

LEGEND:

- ⊗ DISPOSAL WELLS
- PRODUCING WELLS
- ⦿ SHUT IN WELLS
- ⊗ WATER WELLS
- ABANDONED WELLS
- ⦿ TEMPORARILY ABANDONED

THE HOUSTON EXPLORATION COMPANY


**NORTH HORSESHOE #13-19-6-22
SECTION 19, T6S, R22E, S.L.B.&M.
779' FSL 857' FWL**

U&L
Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC MAP **11 08 05**
 MONTH DAY YEAR
 SCALE: 1" = 2000' DRAWN BY: C.H. REVISED: 00-00-00



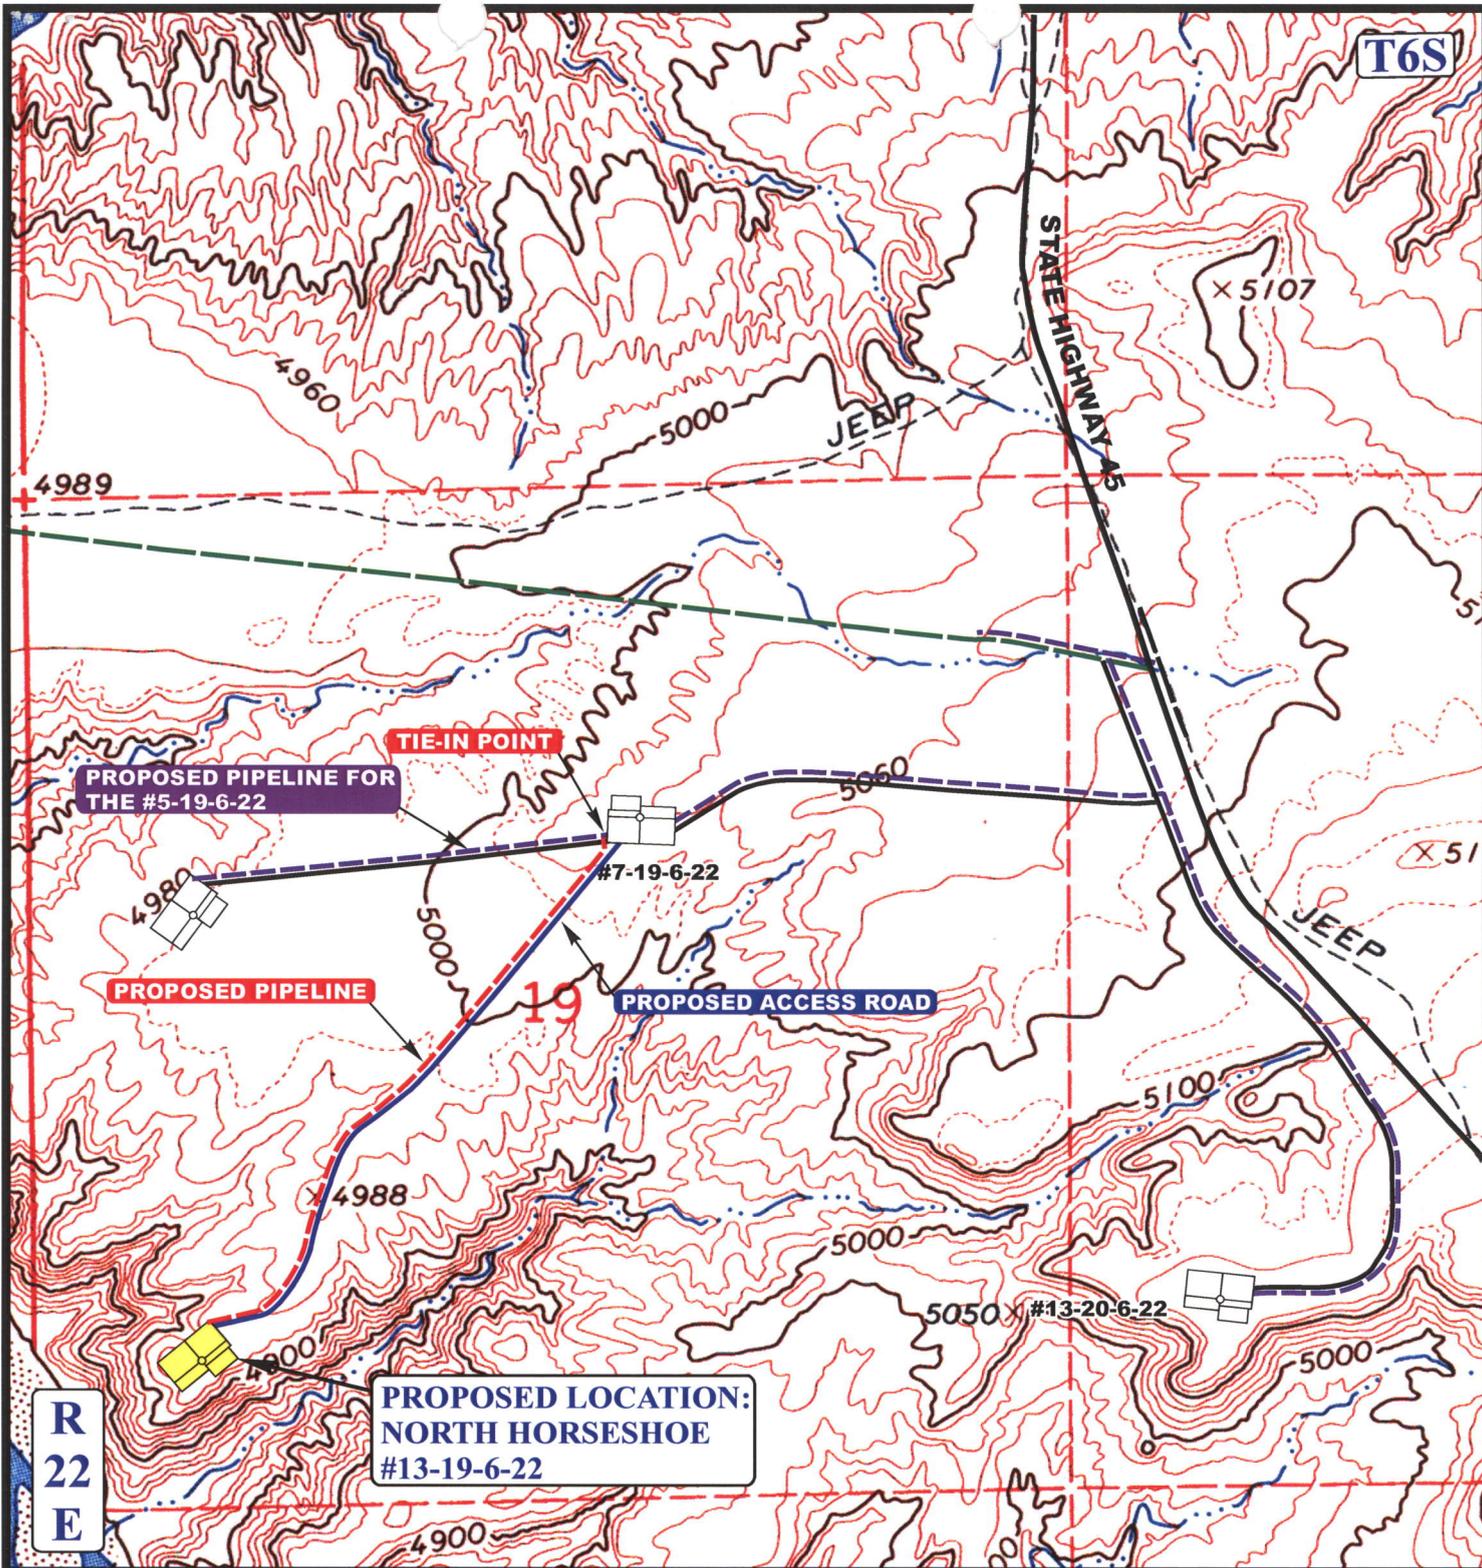

APPROXIMATE TOTAL PIPELINE DISTANCE = 3550' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- PROPOSED PIPELINE
- PROPOSED PIPELINE (SERVICING OTHER WELLS)

THE HOUSTON EXPLORATION COMPANY

**NORTH HORSESHOE #13-19-6-22
SECTION 19, T6S, R22E, S.L.B.&M.
779' FSL 857' FWL**



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP **11 08 05**
MONTH DAY YEAR
SCALE: 1" = 1000' DRAWN BY: C.H. REVISED: 00-00-00



**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 05/07/2007

API NO. ASSIGNED: 43-047-39288

WELL NAME: N HORSESHOE 13-19-6-22
 OPERATOR: HOUSTON EXPLORATION CO, (N2525)
 CONTACT: WILLIAM RYAN

PHONE NUMBER: 713-830-6973

PROPOSED LOCATION:

SWSW 19 060S 220E
 SURFACE: 0779 FSL 0857 FWL
 BOTTOM: 0779 FSL 0857 FWL
 COUNTY: UINTAH
 LATITUDE: 40.27952 LONGITUDE: -109.4915
 UTM SURF EASTINGS: 628246 NORTHINGS: 4459663
 FIELD NAME: UNDESIGNATED (2)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal
 LEASE NUMBER: UTU-76768
 SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: MVRD
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. 104155044)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. MUNICIPAL)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)

LOCATION AND SITING:


- R649-2-3.
- Unit: _____
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: _____
Eff Date: _____
Siting: _____
- R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: _____

1- Fed. Approval

2- Spacing Shp

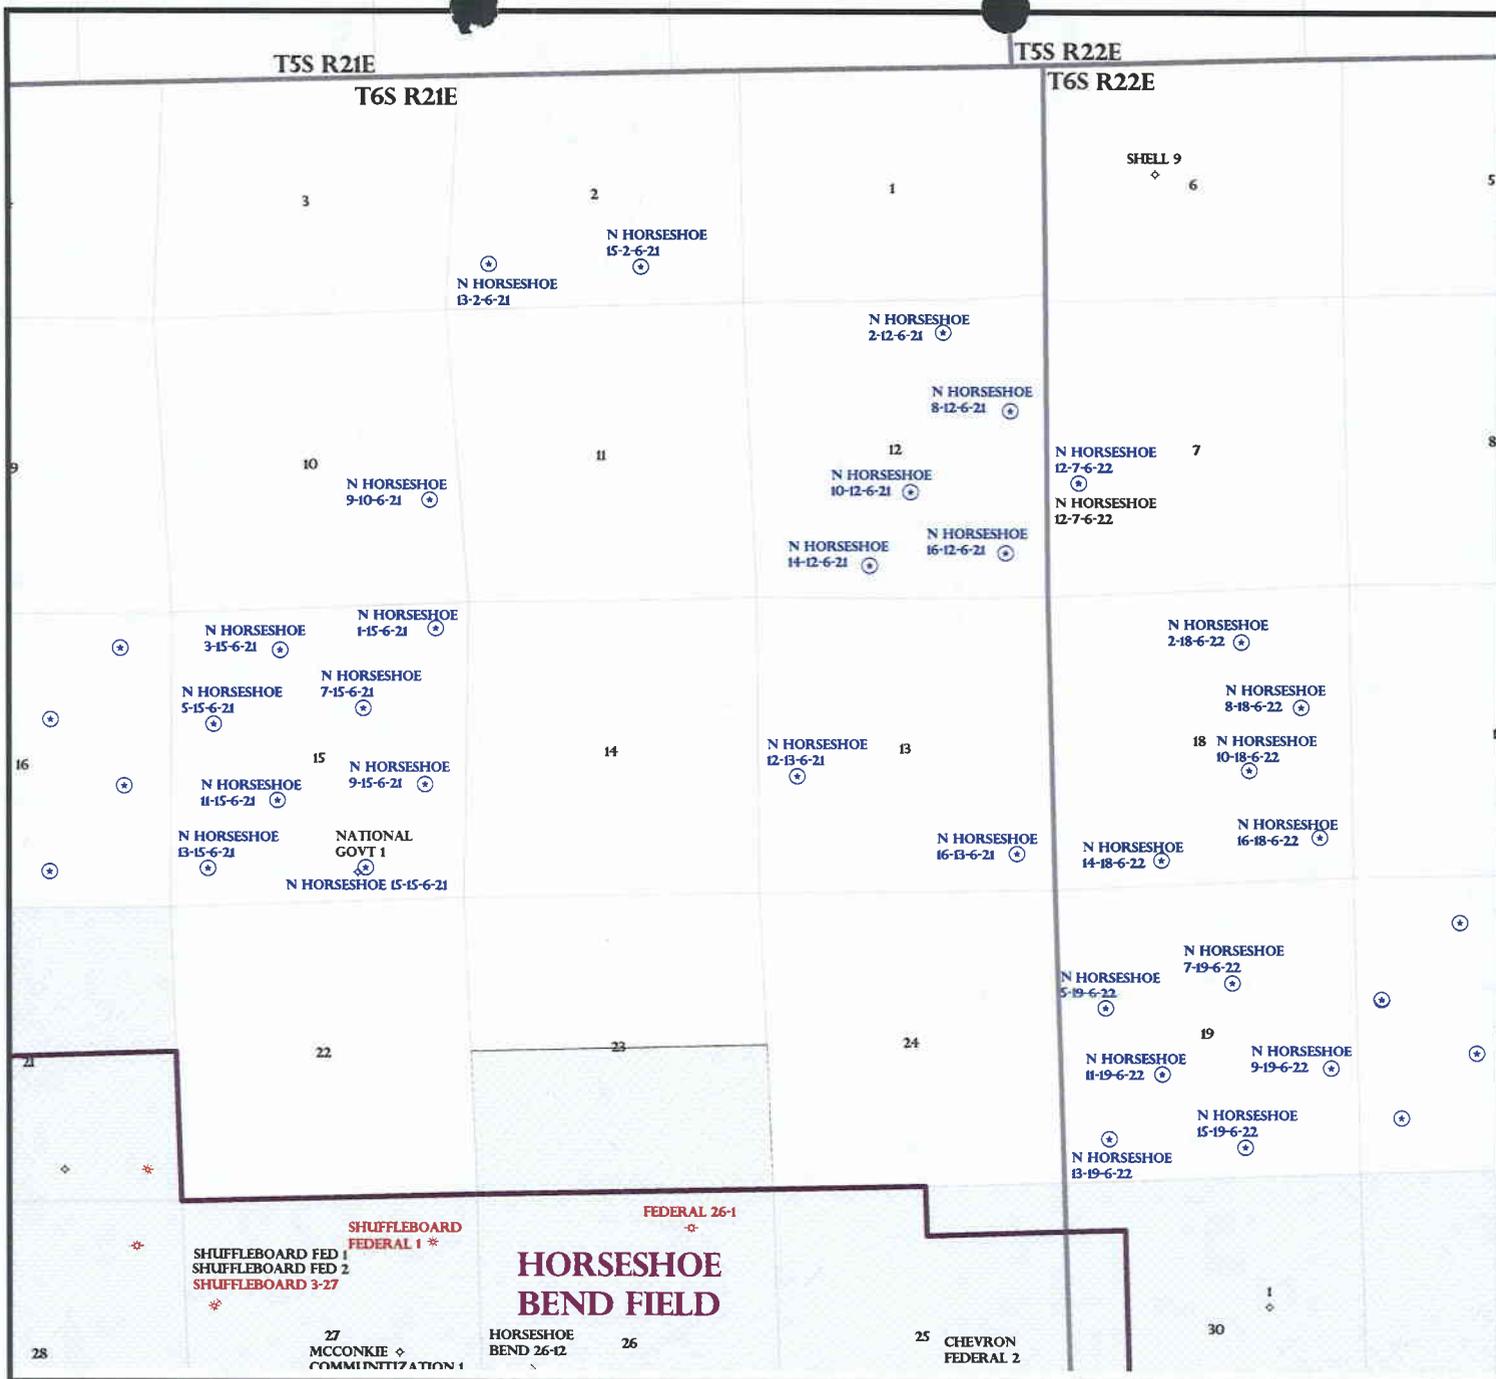

OPERATOR: THE HOUSTON EXPL CO (N2525)

SEC: 19 T.6S R. 22E

FIELD: UNDESIGNATED (002)


COUNTY: UINTAH

SPACING: R649-3-2 / GENERAL SITING

- Field Status**
- ABANDONED
 - ACTIVE
 - COMBINED
 - INACTIVE
 - PROPOSED
 - STORAGE
 - TERMINATED

- Unit Status**
- EXPLORATORY
 - GAS STORAGE
 - NF PP OIL
 - NF SECONDARY
 - PENDING
 - PI OIL
 - PP GAS
 - PP GEOTHERML
 - PP OIL
 - SECONDARY
 - TERMINATED

- Wells Status**
- GAS INJECTION
 - GAS STORAGE
 - LOCATION ABANDONED
 - NEW LOCATION
 - PLUGGED & ABANDONED
 - PRODUCING GAS
 - PRODUCING OIL
 - SHUT-IN GAS
 - SHUT-IN OIL
 - TEMP. ABANDONED
 - TEST WELL
 - WATER INJECTION
 - WATER SUPPLY
 - WATER DISPOSAL
 - DRILLING



Utah Oil Gas and Mining



PREPARED BY: DIANA MASON
DATE: 8-MAY-2007



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLÉR
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

May 9, 2007

Houston Exploration Company
1100 Louisiana, Ste. 2000
Houston, TX 77002

Re: North Horseshoe 13-19-6-22 Well, 779' FSL, 857' FWL, SW SW, Sec. 19,
T. 6 South, R. 22 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-39288.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal Office

Operator: Houston Exploration Company
Well Name & Number North Horseshoe 13-19-6-22
API Number: 43-047-39288
Lease: UTU-76768

Location: SW SW **Sec.** 19 **T.** 6 South **R.** 22 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division with 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281 office
(801) 733-0983 home

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

Division of Oil, Gas and Mining
OPERATOR CHANGE WORKSHEET

ROUTING

1. DJJ

2. CDW

Change of Operator (Well Sold)

X - Operator Merger

The operator of the well(s) listed below has changed, effective:

6/1/2007

FROM: (Old Operator): N2525 - The Houston Exploration Company 1100 Louisiana, Suite 2000 Houston, TX 77002 Phone: 1-(713) 830-6800	TO: (New Operator): N6965-Forest Oil Corporation 707 17th St, Suite 3600 Denver, CO 80202 Phone: 1 (303) 812-1755
-------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------

WELL NAME		SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
SEE ATTACHED LIST									

OPERATOR CHANGES DOCUMENTATION

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 7/30/2007
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 7/30/2007
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 7/31/2007
- a. Is the new operator registered in the State of Utah: Business Number: 571171-0143
- b. If **NO**, the operator was contacted on: _____
- a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- b. Inspections of LA PA state/fee well sites complete on: _____
- c. Reports current for Production/Disposition & Sundries on: YES
- Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 7/31/2007 BIA
- Federal and Indian Units:**
The BLM or BIA has approved the successor of unit operator for wells listed on: n/a
- Federal and Indian Communization Agreements ("CA"):**
The BLM or BIA has approved the operator for all wells listed within a CA on: n/a
- Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: n/a

DATA ENTRY:

- Changes entered in the **Oil and Gas Database** on: 8/27/2007
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 8/27/2007
- Bond information entered in RBDMS on: 8/27/2007
- Fee/State wells attached to bond in RBDMS on: 8/27/2007
- Injection Projects to new operator in RBDMS on: n/a
- Receipt of Acceptance of Drilling Procedures for APD/New on: 7/30/2007

BOND VERIFICATION:

- Federal well(s) covered by Bond Number: 6236351
- Indian well(s) covered by Bond Number: n/a
- a. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number 6218963
- b. The **FORMER** operator has requested a release of liability from their bond on: not yet

LEASE INTEREST OWNER NOTIFICATION:

- (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 8/1/2007

COMMENTS:

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: See Attached List
2. NAME OF OPERATOR: Forest Oil Corporation <i>N6965</i>		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: 707 17th Street, #3600 CITY Denver, STATE CO ZIP 80202		7. UNIT or CA AGREEMENT NAME:
4. LOCATION OF WELL FOOTAGES AT SURFACE: See attached list		8. WELL NAME and NUMBER: See Attached List
5. PHONE NUMBER: (303) 812-1755		9. API NUMBER: various
6. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		10. FIELD AND POOL, OR WILDCAT:
7. COUNTY:		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Change of Operator</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. *N2525*
 Effective 6/1/2007 please change the operator for the attached list of Utah wells from The Houston Exploration Company N-2525) to Forest Oil Corporation (N-6965). Forest merged with The Houston Exploration Company, a copy of the merger document is attached.. The contract operated wells will continue to be contract operated by Enduring.

Forest Oil Corporation as new operator, accepts all applicable terms, conditions, stipulations and restrictions concerning approved operations conducted on the lease or portion of the lease described.

Forest Oil Corporation meets the State of Utah bonding requirements under Safeco bond #6218963.

Please send all future correspondence to Forest Oil Corporation at the above listed address.

Forest Oil Corporation, 707 17th Street, Suite #3600, Denver, CO 80202

J.C. Ridens
 J. C. Ridens, Senior Vice President - Western Region

7-5-07
 Date

NAME (PLEASE PRINT) Joanne C. Hresko TITLE Vice President & General Mgr. - Northern Division
 SIGNATURE *Joanne C. Hresko* DATE 7-5-07

(This space for State use only)

APPROVED 8127107
Earlene Russell
 (5/2000) Division of Oil, Gas and Mining
 Earlene Russell, Engineering Technician

All wells with APD or New status
 RECEIVED
 JUL 30 2007
 DIV OF OIL, GAS & MINING *wmp*

(See Instructions on Reverse Side)

well_name	sec	twp	rng	api	entity	lease	well	stat	flag
HORSESHOE BEND 16-33	33	060S	210E	4304736214		Federal	OW	APD	
HORSESHOE BEND 3-33	33	060S	210E	4304736215		Federal	OW	APD	
N HORSESHOE 7-16-6-21	16	060S	210E	4304737438		State	GW	APD	C
N HORSESHOE 9-16-6-21	16	060S	210E	4304737439		State	GW	APD	C
N HORSESHOE 15-16-6-21	16	060S	210E	4304737440		State	GW	APD	C
N HORSESHOE 11-16-6-21	16	060S	210E	4304737441		State	GW	APD	C
N HORSESHOE 1-16-6-21	16	060S	210E	4304737442		State	GW	APD	C
N HORSESHOE 13-2-6-21	02	060S	210E	4304737476		State	GW	APD	C
N HORSESHOE 15-2-6-21	02	060S	210E	4304737477		State	GW	APD	C
GUSHER 2-2-6-19	02	060S	190E	4304737561		State	OW	APD	C
GUSHER 16-2-6-19	02	060S	190E	4304737562		State	OW	APD	C
GUSHER 1-2-6-19	02	060S	190E	4304737563		State	OW	APD	C
GUSHER 3-2-6-19	02	060S	190E	4304737568		State	OW	APD	C
E COYOTE 6-2-8-25	02	080S	250E	4304737572		State	GW	APD	C
E COYOTE 3-2-8-25	02	080S	250E	4304737573		State	GW	APD	C
E COYOTE 8-2-8-25	02	080S	250E	4304737574		State	GW	APD	C
N HORSESHOE 13-16-6-21	16	060S	210E	4304737575		State	GW	APD	C
E COYOTE 4-2-8-25	02	080S	250E	4304737882		State	GW	APD	C
E COYOTE 14-2-8-25	02	080S	250E	4304737883		State	GW	APD	C
E COYOTE 10-2-8-25	02	080S	250E	4304737884		State	GW	APD	C
E COYOTE 16-2-8-25	02	080S	250E	4304737885		State	GW	APD	C
E COYOTE 12-2-8-25	02	080S	250E	4304737886		State	GW	APD	C
N HORSESHOE 16-18-6-22	18	060S	220E	4304737887		Federal	GW	APD	C
N HORSESHOE 14-18-6-22	18	060S	220E	4304737888		Federal	GW	APD	C
N HORSESHOE 2-18-6-22	18	060S	220E	4304737889		Federal	GW	APD	C
N HORSESHOE 10-18-6-22	18	060S	220E	4304737890		Federal	GW	APD	C
N HORSESHOE 8-18-6-22	18	060S	220E	4304737891		Federal	GW	APD	C
N HORSESHOE 13-15-6-21	15	060S	210E	4304738013		Federal	GW	APD	C
N HORSESHOE 15-15-6-21	15	060S	210E	4304738014		Federal	GW	APD	C
N HORSESHOE 11-15-6-21	15	060S	210E	4304738015		Federal	GW	APD	C
N HORSESHOE 9-15-6-21	15	060S	210E	4304738016		Federal	GW	APD	C
N HORSESHOE 5-15-6-21	15	060S	210E	4304738017		Federal	GW	APD	C
N HORSESHOE 3-15-6-21	15	060S	210E	4304738018		Federal	GW	APD	C
N HORSESHOE 5-20-6-22	20	060S	220E	4304738019		Federal	GW	APD	C
N HORSESHOE 13-20-6-22	20	060S	220E	4304738020		Federal	GW	APD	C
N HORSESHOE 3-20-6-22	20	060S	220E	4304738021		Federal	GW	APD	C
N HORSESHOE 7-20-6-22	20	060S	220E	4304738022		Federal	GW	APD	C
N HORSESHOE 11-20-6-22	20	060S	220E	4304738023		Federal	GW	APD	C
N HORSESHOE 2-12-6-21	12	060S	210E	4304738198		Federal	GW	APD	C
N HORSESHOE 14-12-6-21	12	060S	210E	4304738199		Federal	GW	APD	C
N HORSESHOE 10-12-6-21	12	060S	210E	4304738200		Federal	GW	APD	C
N HORSESHOE 8-12-6-21	12	060S	210E	4304738201		Federal	GW	APD	C
N HORSESHOE 16-13-6-21	13	060S	210E	4304738202		Federal	GW	APD	C
N HORSESHOE 15-17-6-22	17	060S	220E	4304738203		Federal	GW	APD	C
N HORSESHOE 5-19-6-22	19	060S	220E	4304738204		Federal	GW	APD	C
N HORSESHOE 15-19-6-22	19	060S	220E	4304738205		Federal	GW	APD	C
N HORSESHOE 3-21-6-22	21	060S	220E	4304738206		Federal	GW	APD	C
N HORSESHOE 11-21-6-22	21	060S	220E	4304738207		Federal	GW	APD	C
N HORSESHOE 15-21-6-22	21	060S	220E	4304738208		Federal	GW	APD	C
N HORSESHOE 13-21-6-22	21	060S	220E	4304738209		Federal	GW	APD	C
N HORSESHOE 5-21-6-22	21	060S	220E	4304738210		Federal	GW	APD	C
N HORSESHOE 7-19-6-22	19	060S	220E	4304738271		Federal	GW	APD	C
N HORSESHOE 5-16-6-22	16	060S	220E	4304738406		State	GW	APD	

well name	sec	twp	rng	api	entity	lease	well	stat	flag
TWELVEMILE WASH 11-13-5-20	13	050S	200E	4304738437		Federal	GW	APD	C
TWELVEMILE WASH 1-15-5-20	15	050S	200E	4304738438		Federal	GW	APD	C
N HORSESHOE 4-33-5-21	33	050S	210E	4304738439		Federal	GW	APD	C
GUSHER 6-15-6-19	15	060S	190E	4304738440		Federal	GW	APD	C
HORSESHOE BEND W 9-34-6-20	34	060S	200E	4304738441		Federal	GW	APD	C
N HORSESHOE 16-12-6-21	12	060S	210E	4304738442		Federal	GW	APD	C
N WALKER HOLLOW 12-29-6-23	29	060S	230E	4304738443		Federal	GW	APD	C
N WALKER HOLLOW 10-30-6-23	30	060S	230E	4304738444		Federal	GW	APD	C
PELICAN LAKE 11-3-8-20	03	080S	200E	4304738445		Federal	GW	APD	C
PELICAN LAKE 8-4-8-20	04	080S	200E	4304738446		Federal	GW	APD	C
E COYOTE 10-3-8-25	03	080S	250E	4304738447		Federal	GW	APD	C
BORDER 10-9-8-25	09	080S	250E	4304738448		Federal	GW	APD	C
N WALKER HOLLOW 14-33-6-23	33	060S	230E	4304738455		Federal	GW	APD	C
SNAKE JOHN WASH 14-11-7-25	11	070S	250E	4304738456		Federal	GW	APD	C
SNAKE JOHN WASH 4-24-7-25	24	070S	250E	4304738457		Federal	GW	APD	C
SQUAW RIDGE 1-26-7-25	26	070S	250E	4304738458		Federal	GW	APD	C
SQUAW RIDGE 13-28-7-25	28	070S	250E	4304738459		Federal	GW	APD	C
SQUAW RIDGE 16-30-7-25	30	070S	250E	4304738460		Federal	GW	APD	C
SQUAW RIDGE 14-16-7-25	16	070S	250E	4304738461		State	GW	APD	C
GUSHER 13-11-5-19	11	050S	190E	4304738462		State	GW	APD	C
N HORSESHOE 1-15-6-21	15	060S	210E	4304738831		Federal	GW	APD	C
N HORSESHOE 16-9-6-22	09	060S	220E	4304739083		State	GW	APD	
N HORSESHOE 12-7-6-22	07	060S	220E	4304739084		State	GW	APD	
N HORSESHOE 14-10-6-22	10	060S	220E	4304739085		State	GW	APD	
N HORSESHOE 2-15-6-22	15	060S	220E	4304739086		State	GW	APD	
N WALKER HOLLOW 12-32-6-23	32	060S	230E	4304739087		State	GW	APD	
N WALKER HOLLOW 10-32-6-23	32	060S	230E	4304739088		State	GW	APD	
N WALKER HOLLOW 16-32-6-23	32	060S	230E	4304739089		State	GW	APD	
N WALKER HOLLOW 8-32-6-23	32	060S	230E	4304739090		State	GW	APD	
N WALKER HOLLOW 11-36-6-23	36	060S	230E	4304739091		State	GW	APD	
N WALKER HOLLOW 13-36-6-23	36	060S	230E	4304739092		State	GW	APD	
N WALKER HOLLOW 14-32-6-23	32	060S	230E	4304739093		State	GW	APD	
N WALKER HOLLOW 15-36-6-23	36	060S	230E	4304739094		State	GW	APD	
N HORSESHOE 4-15-6-22	15	060S	220E	4304739095		State	GW	APD	
N HORSESHOE 9-10-6-21	10	060S	210E	4304739284		Federal	GW	APD	C
N HORSESHOE 12-13-6-21	13	060S	210E	4304739285		Federal	GW	APD	
N HORSESHOE 7-15-6-21	15	060S	210E	4304739286		Federal	GW	APD	
N HORSESHOE 9-19-6-22	19	060S	220E	4304739287		Federal	GW	APD	
N HORSESHOE 13-19-6-22	19	060S	220E	4304739288		Federal	GW	APD	
N HORSESHOE 11-19-6-22	19	060S	220E	4304739289		Federal	GW	APD	
SQUAW RIDGE 16-13-7-24	13	070S	240E	4304739319		Federal	GW	APD	C
N HORSESHOE 16-7-6-22	07	060S	220E	4304739320		Federal	GW	APD	C
SQUAW RIDGE 8-16-7-25	16	070S	250E	4304738024		State	GW	NEW	C

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Request to Transfer Application or Permit to Drill

(This form should accompany a Sundry Notice, Form 9, requesting APD transfer)

Well name:	N Horseshoe 13-19-6-22
API number:	4304739288
Location:	Qtr-Qtr: SWSW Section: 19 Township: 6S Range: 22E
Company that filed original application:	The Houston Exploration Company
Date original permit was issued:	05/09/2007
Company that permit was issued to:	The Houston Exploration Company

Check one	Desired Action:
<input type="checkbox"/>	Transfer pending (unapproved) Application for Permit to Drill to new operator
<input type="checkbox"/>	The undersigned as owner with legal rights to drill on the property, hereby verifies that the information as submitted in the pending Application for Permit to Drill, remains valid and does not require revision. The new owner of the application accepts and agrees to the information and procedures as stated in the application.
<input checked="" type="checkbox"/>	Transfer approved Application for Permit to Drill to new operator
<input type="checkbox"/>	The undersigned as owner with legal rights to drill on the property as permitted, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.	Yes	No
If located on private land, has the ownership changed?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
If so, has the surface agreement been updated?	<input type="checkbox"/>	<input type="checkbox"/>
Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Have there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Have there been any changes to the access route including ownership or right-of-way, which could affect the proposed location?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Has the approved source of water for drilling changed?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Is bonding still in place, which covers this proposed well? Bond No. <u>6218963</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Any desired or necessary changes to either a pending or approved Application for Permit to Drill that is being transferred, should be filed on a Sundry Notice, Form 9, or amended Application for Permit to Drill, Form 3, as appropriate, with necessary supporting information as required.

Name (please print) Tami Hofmann Title Regulatory Specialist
 Signature *Tami Hofmann* Date 08/06/2007
 Representing (company name) Forest Oil Corporation

The person signing this form must have legal authority to represent the company or individual(s) to be listed as the new operator on the Application for Permit to Drill.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-76768
2. NAME OF OPERATOR: Forest Oil Corporation		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: NA
3. ADDRESS OF OPERATOR: 707 17th ST Suite 3600 CITY Denver STATE CO ZIP 80202		7. UNIT or CA AGREEMENT NAME: NA
4. LOCATION OF WELL FOOTAGES AT SURFACE: 779' FSL & 857' FEL		8. WELL NAME and NUMBER: North Horseshoe 13-19-6-22
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SWSW 19 6S 22E		9. API NUMBER: 4304739288
COUNTY: Uintah		10. FIELD AND POOL, OR WILDCAT: Exploratory
STATE: UTAH		

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Extension</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The Operator respectfully requests a one year approval extension for the subject location.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 04-29-08
By: [Signature]

COPY SENT TO OPERATOR

Date: 5.1.2008
Initials: KS

NAME (PLEASE PRINT) <u>Ginger Bowden</u>	TITLE <u>Agent</u>
SIGNATURE <u>[Signature]</u>	DATE <u>4/16/2008</u>

(This space for State use only)

RECEIVED
APR 28 2008

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304739288
Well Name: North Horseshoe 13-19-6-22
Location: Section 19 Township 6 South Range 22 East SWSW
Company Permit Issued to: Forest Oil Corporation (Houston Exploration Co)
Date Original Permit Issued: 5/9/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

Finger Bowden
Signature

4/16/2008
Date

Title: Agent

Representing: Forest Oil Corporation

RECEIVED

APR 28 2008

DIV. OF OIL, GAS & MINING



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

June 18, 2009

Forest Oil Corporation
707 17th Street, Suite 3600
Denver, CO 80202

Re: APD Rescinded – N Horseshoe 13-19-6-22, Sec.19, T.6S, R.22E
Uintah County, Utah API No. 43-047-39288

Ladies and Gentlemen:

The Application for Permit to Drill (APD) for the subject well was approved by the Division of Oil, Gas and Mining (Division) on May 9, 2007. On April 29, 2008 the Division granted a one-year APD extension. No drilling activity at this location has been reported to the division. Therefore, approval to drill the well is hereby rescinded, effective June 30, 2009.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal

