

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0136
Expires July 31, 2010

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU67868
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator EOG RESOURCES, INC. Contact: KAYLENE R GARDNER E-Mail: kaylene_gardner@eogresources.com		7. If Unit or CA Agreement, Name and No.
3a. Address 1060 EAST HIGHWAY 40 VERNAL, UT 84078	3b. Phone No. (include area code) Ph: 435-781-9111	8. Lease Name and Well No. EAST CHAPITA 23-09
4. Location of Well (Report location clearly and in accordance with any State requirements. *) 642213X 4433821Y 40.044533 -109.332952 At surface SESW 470FSL 2150FWL 40.04453 N Lat, 109.33300 W Lon At proposed prod. zone SESW 470FSL 2150FWL 40.04453 N Lat, 109.33300 W Lon		9. API Well No. 43-047-39637
14. Distance in miles and direction from nearest town or post office* 55.3 MILES SOUTH OF VERNAL, UTAH	12. County or Parish UINTAH	13. State UT
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 470	16. No. of Acres in Lease 1079.00	17. Spacing Unit dedicated to this well
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 3900	19. Proposed Depth 9150 MD 9150 TVD	20. BLM/BIA Bond No. on file NM 2308
21. Elevations (Show whether DF, KB, RT, GL, etc.) 4904 GL	22. Approximate date work will start	23. Estimated duration 45 DAYS

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|--|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature (Electronic Submission)	Name (Printed/Typed) KAYLENE R GARDNER Ph: 435-781-9111	Date 09/17/2007
Title LEAD REGULATORY ASSISTANT		
Approved by (Signature)	Name (Printed/Typed) BRADLEY G. HILL	Date 08-20-08
Title ENVIRONMENTAL MANAGER		

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

Electronic Submission #56348 verified by the BLM Well Information System
For EOG RESOURCES, INC., sent to the Vernal

**Federal Approval of this
Action is Necessary**

RECEIVED

SEP 19 2007

DIV OF OIL, GAS & MINING

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****

T9S, R23E, S.L.B.&M.

EOG RESOURCES, INC.


Well location, EAST CHAPITA #23-9, located as shown in the SE 1/4 SW 1/4 of Section 9, T9S, R23E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

BENCH MARK 58 EAM (1965) LOCATED IN THE NE 1/4 OF SECTION 30, T9S, R23E, S.L.B.&M. TAKEN FROM THE RED WASH SE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5132 FEET.

BASIS OF BEARINGS



BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

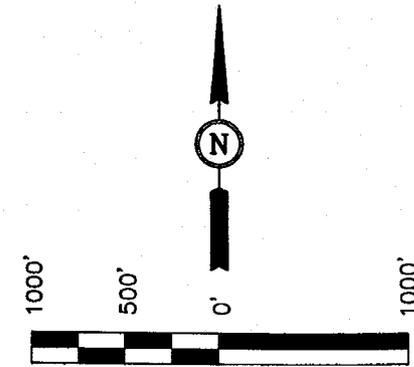

SCALE

CERTIFICATE OF ACCURACY

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

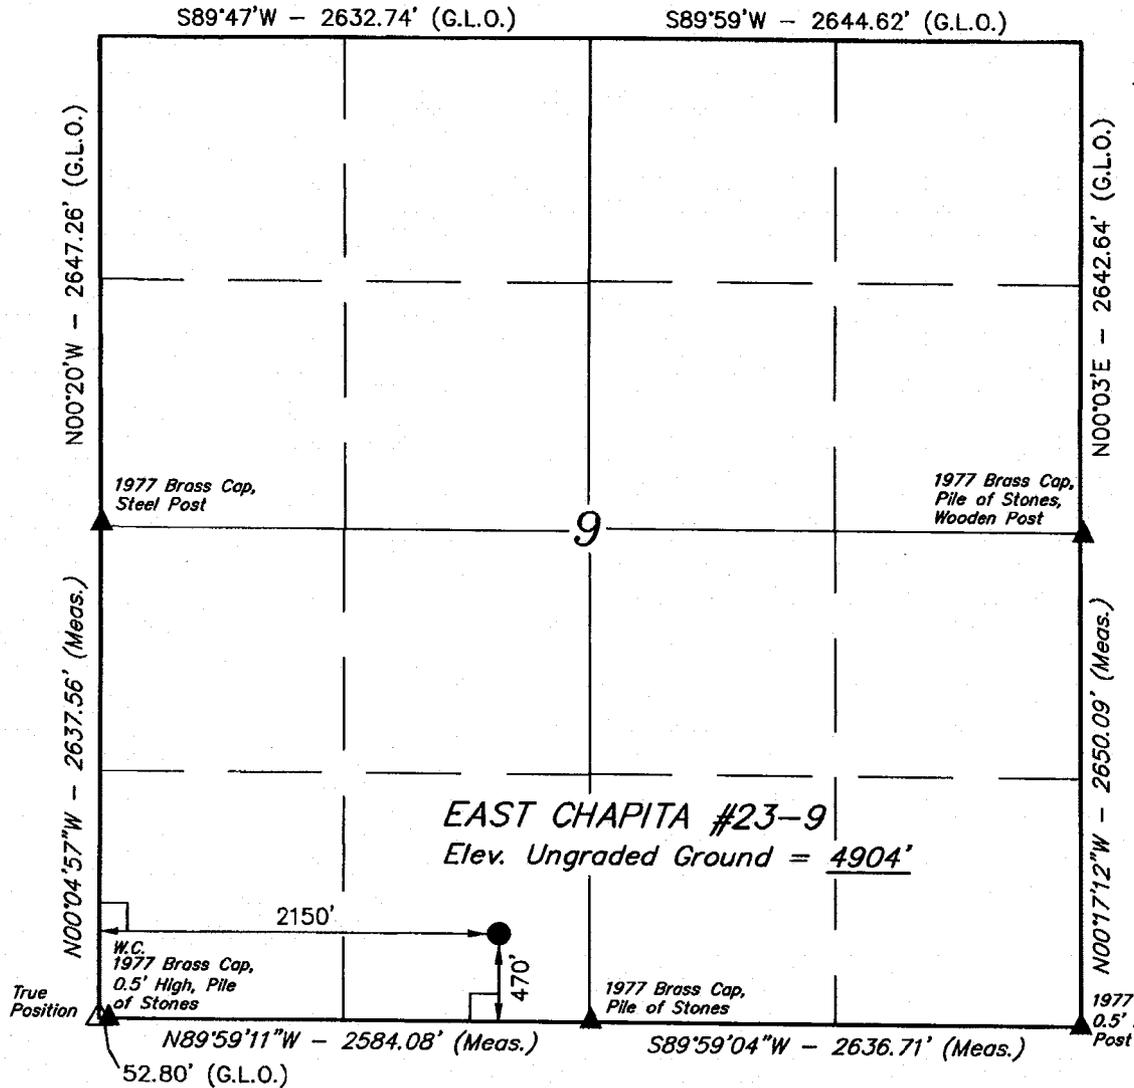

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)
 LATITUDE = 40°02'40.18" (40.044494)
 LONGITUDE = 109°20'01.26" (109.333683)
 (NAD 27)
 LATITUDE = 40°02'40.30" (40.044528)
 LONGITUDE = 109°19'58.81" (109.333003)

UINTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 12-19-05	DATE DRAWN: 12-23-05
PARTY T.A. J.H. S.L.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE EOG RESOURCES, INC.	

STATE OF UTAH)

) ss

COUNTY OF UINTAH)

VERIFICATION

Kaylene R. Gardner, of lawful age, being first duly sworn upon oath, deposes and says:

She is the Sr. Regulatory Assistant of EOG Resources, Inc., of Vernal, Utah. EOG Resources, Inc. is the operator of the following described well:


**EAST CHAPITA 23-09
470' FSL – 2150' FWL (SESW)
SECTION 9, T9S, R23E
UINTAH COUNTY, UTAH**

EOG Resources, Inc., Kerr-McGee Oil & Gas Onshore LP, Exhibit A are the only owners in the well and/or of all contiguous oil and gas leases or drilling units overlying the pool.

On the 13th day of September, 2007 she placed in the United States mail, with postage prepaid, a copy of the attached Application for Commingling in one wellbore for the subject well.


Said envelope which contained these instruments was addressed to the Utah Division of Oil, Gas & Mining, Bureau of Land Management, and Kerr-McGee Oil & Gas Onshore LP.

Further affiant saith not.



Kaylene R. Gardner
Sr. Regulatory Assistant

Subscribed and sworn before me this 13th day of September, 2007.





Notary Public

My Commission Expires: 8/1/2009

Exhibit "A" to Affidavit
East Chapita 23-09 Application to Commingle

Kerr-McGee Oil & Gas Onshore LP
1999 Broadway, Suite 3700
Denver, CO 80202
Attn: Mr. W. Chris Latimer

R 23 E

9

9-30-13
UTU-080939

T
9
S


ECW 23-9



HBP
UTU-67868

HBP
ML 47045 16

○ EAST CHAPITA 23-9



Denver Division

EXHIBIT "A"

EAST CHAPITA 23-9
Commingling Application
Uintah County, Utah

Scale:
1" = 1000'

D:\utah\Commingled\
page_EC23-9_commingled.dwg
WELL

Author

TLM

Mar 06, 2007 -
1:29pm

EIGHT POINT PLAN

EAST CHAPITA 23-09
SE/SW, SEC. 09, T9S, R23E, S.L.B.&M..
UINTAH COUNTY, UTAH

1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:

FORMATION	TVD-RKB (ft)	Objective	Lithology	
Green River	1,723		Shale	
Wasatch	4,660	Primary	Sandstone	Gas
Chapita Wells	5,225	Primary	Sandstone	Gas
Buck Canyon	5,918	Primary	Sandstone	Gas
North Horn	6,511	Primary	Sandstone	Gas
KMV Price River	6,888	Primary	Sandstone	Gas
KMV Price River Middle	7,683	Primary	Sandstone	Gas
KMV Price River Lower	8,544	Primary	Sandstone	Gas
Sego	8,936		Sandstone	
TD	9,150			

Estimated TD: **9,150' or 200'± below Sego top**

Anticipated BHP: 4,995 Psig

1. Fresh Waters may exist in the upper, approximately 1,000 ft ± of the Green River Formation, with top at about 2,000 ft ±.
2. Cement isolation is installed to surface of the well isolating all zones by cement.

EOG Resources, Inc. requests authorization for commingling of production from the Wasatch and Mesaverde formations in the referenced wellbore. In the event allocation of production is necessary, the allocation will be based on proportionate net pay as calculated from cased-hole logs. Production from the Wasatch and Mesaverde formations will be commingled in the wellbore and produced through open-ended 2-3/8" tubing landed below all perforations in the 4-1/2" production casing.

Attached is a map showing the location of all wells on contiguous oil and gas leases or drilling units and an affidavit showing that this application has been provided to owners of all contiguous oil and gas leases or drilling units overlying the pool.

3. PRESSURE CONTROL EQUIPMENT:

Production Hole – 5000 Psig
BOP schematic diagrams attached.

4. CASING PROGRAM:

EIGHT POINT PLAN

EAST CHAPITA 23-09
SE/SW, SEC. 09, T9S, R23E, S.L.B.&M..
UINTAH COUNTY, UTAH

CASING	Hole Size	Length	Size	WEIGHT	Grade	Thread	Rating Collapse	Factor Burst	Tensile
Conductor	17 ½"	0 – 45'	13 ¾"	48.0#	H-40	STC	770 PSI	1730 PSI	322,000#
Surface	12 ¼"	45' – 2,300' KB±	9-5/8"	36.0#	J-55	STC	2020 PSI	3520 Psi	394,000#
Production	7-7/8"	2,300'± – TD	4-½"	11.6#	N-80	LTC	6350 PSI	7780 Psi	223,000#

Note: 12-¼" surface hole will be drilled to a total depth of 200'± below the base of the Green River lost circulation zone and cased w/9-5/8" as shown to that depth. Drilled depth may be shallower or deeper than the 2300' shown above depending on the actual depth of the loss zone.

All casing will be new or inspected.

5. Float Equipment:

Surface Hole Procedure (0' - 2300'±)

Guide Shoe

Insert Float Collar (PDC drillable)

Centralizers: 1-5' above shoe, top of jts. #2 and #3 then every 5th joint to surface. (15 total)

Production Hole Procedure (2300'± - TD):

Float shoe, 1 joint casing, float collar and balance of casing to surface. 4-½", 11.6#, N-80 or equivalent marker collars or short casing joints to be placed at top of Price River and 400' above top of Wasatch. Centralizers to be placed 5' above shoe on joint #1, top of joint #2, and every 2nd joint to 400' above Wasatch Island top. Thread lock float shoe, top and bottom of float collar, and top of 2nd joint.

6. MUD PROGRAM

Surface Hole Procedure (Surface - 2300'±):

Air/air mist or aerated water.

Production Hole Procedure (2300'± - TD): Anticipated mud weight 9.5 – 10.5 ppg depending on actual wellbore conditions encountered while drilling.

2300'± - TD A closed mud system will be utilized. A bentonite gelled water mud system will be used to control viscosity w/PHPA polymer used for supplemental viscosity and clay

EIGHT POINT PLAN

EAST CHAPITA 23-09

SE/SW, SEC. 09, T9S, R23E, S.L.B.&M..

UINTAH COUNTY, UTAH

encapsulation/inhibition. Water loss will be maintained at <15cc's using white starch or PAC. Bactericides will be used as needed. Anticipated pH will range from 9.0-10.0. Mud weight will be adjusted as necessary for well control. Deflocculants/thinners will be used as necessary to maintain mud quality. LCM sweeps will be utilized as necessary to control lost circulation and mud loss. CO2 contamination, if encountered, will be treated with lime and gypsum.

7. VARIANCE REQUESTS:

Reference: Onshore Oil and Gas Order No. 2 – Item E: Special Drilling Operations

EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. Due to reduce location excavation, the blooie line will be approximately 75' in length

8. EVALUATION PROGRAM:

Logs: Mud log from base of surface casing to TD.

Cased-hole Logs: Cased-hole logs will be run in lieu of open-hole logs consisting of the following:
Cement Bond / Casing Collar Locator and Pulsed Neutron

9. CEMENT PROGRAM:

Surface Hole Procedure (Surface - 2300'±):

Lead: 185 sks Class "G" cement with 16% Gel, 10 #/sx Gilsonite, 3% Salt, 2% CaCl₂, 3 lb/sx GR3 ¼ #/sx Flocele mixed at 11 ppg, 3.82 ft³/sk. yield, 23 gps water.

Tail: 207 sks Class "G" cement with 2% CaCl₂, ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft³/sk., 5.2 gps water.

Top Out: As necessary with Class "G" cement with 2% CaCl₂, ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft³/sk., 5.2 gps water.

Note: Cement volumes will be calculated to bring lead cement to surface and tail cement to 500' above the casing shoe.

Production Hole Procedure (2300'± - TD)

Lead: 135 sks: Hi-Lift "G" w/12% D20 (Bentonite), 1% D79 (Extender), 5% D44

EIGHT POINT PLAN

EAST CHAPITA 23-09

SE/SW, SEC. 09, T9S, R23E, S.L.B.&M..

UINTAH COUNTY, UTAH

(Salt), 0.2% D46 (Antifoam), 0.25% D112 (Fluid Loss Additive), 0.25 pps D29 (cello flakes) mixed at 11.0 ppg, 3.91 ft³/sk., 24.5 gps water.

Tail: **880 sks:** 50:50 Poz "G" w/ 2% D20 (Bentonite), 0.1% D46 (Antifoam), 0.075% D13 (Retarder), 0.2% D167 (Fluid Loss Additive), 0.2% D65 (Dispersant), mixed at 14.1 ppg, 1.28 ft³/sk., 5.9gps water.

Note: The above number of sacks is based on gauge-hole calculation.
Lead volume to be calculated to bring cement to 200'± above 9-5/8" casing shoe.
Tail volume to be calculated to bring cement to 400'± above top of Wasatch.

Final Cement volumes will be based upon gauge-hole plus 45% excess.

10. ABNORMAL CONDITIONS:

Surface Hole (Surface - 2300'±):

Lost circulation

Production Hole (2300'± - TD):

Sloughing shales, lost circulation and key seat development are possible in the Wasatch Formation.

11. STANDARD REQUIRED EQUIPMENT:


- A. Choke Manifold
- B. Upper and Lower Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

12. HAZARDOUS CHEMICALS:


No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

(Attachment: BOP Schematic Diagram)

EOG RESOURCES 11" 5,000 PSI W.P. BOP CONFIGURATION

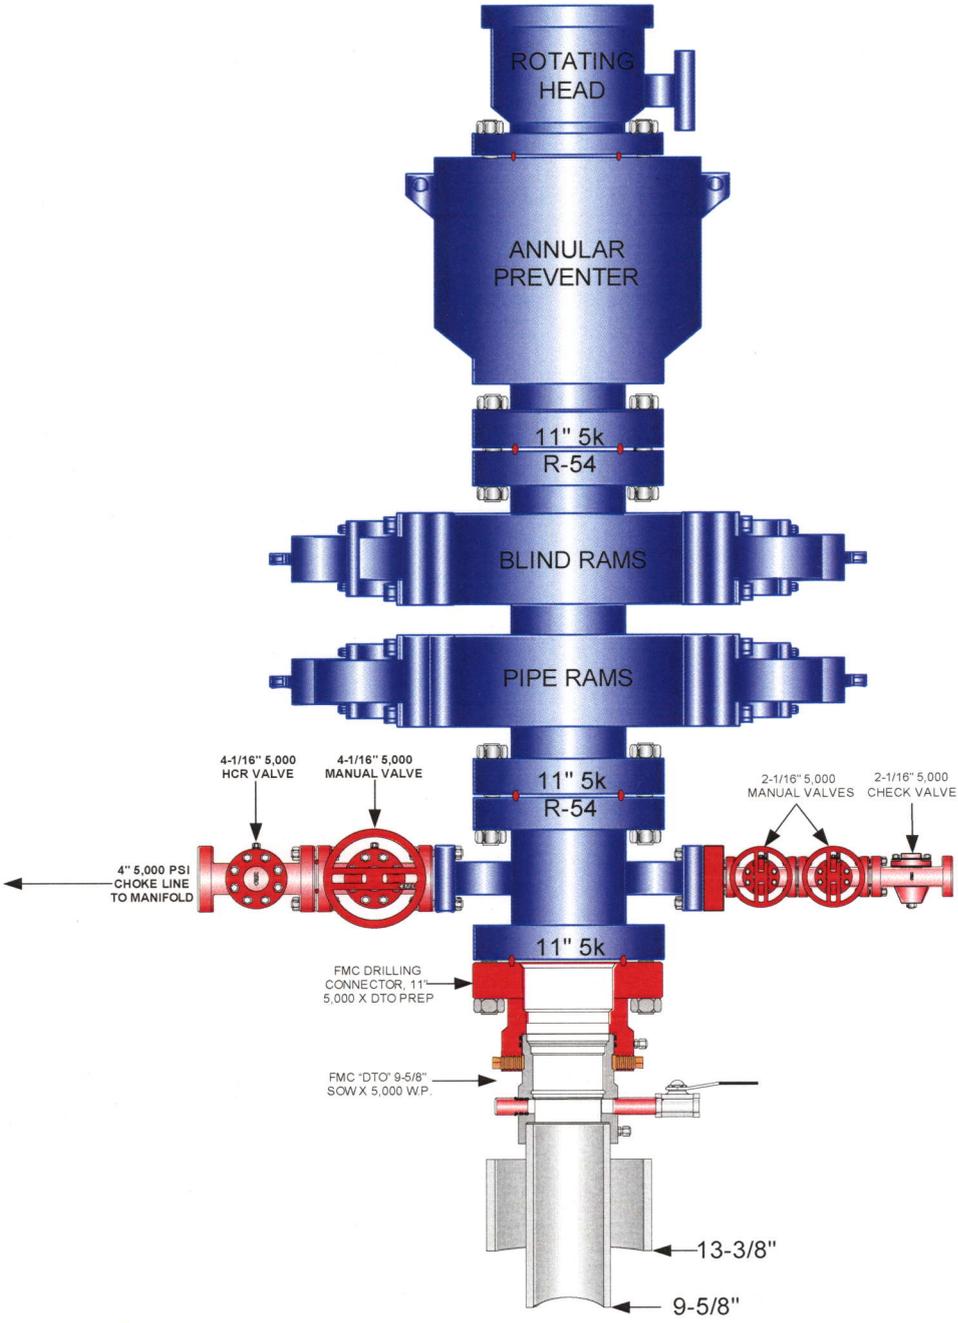

**EOG RESOURCES CHOKE MANIFOLD CONFIGURATION
W/ 5,000 PSI WP VALVES**

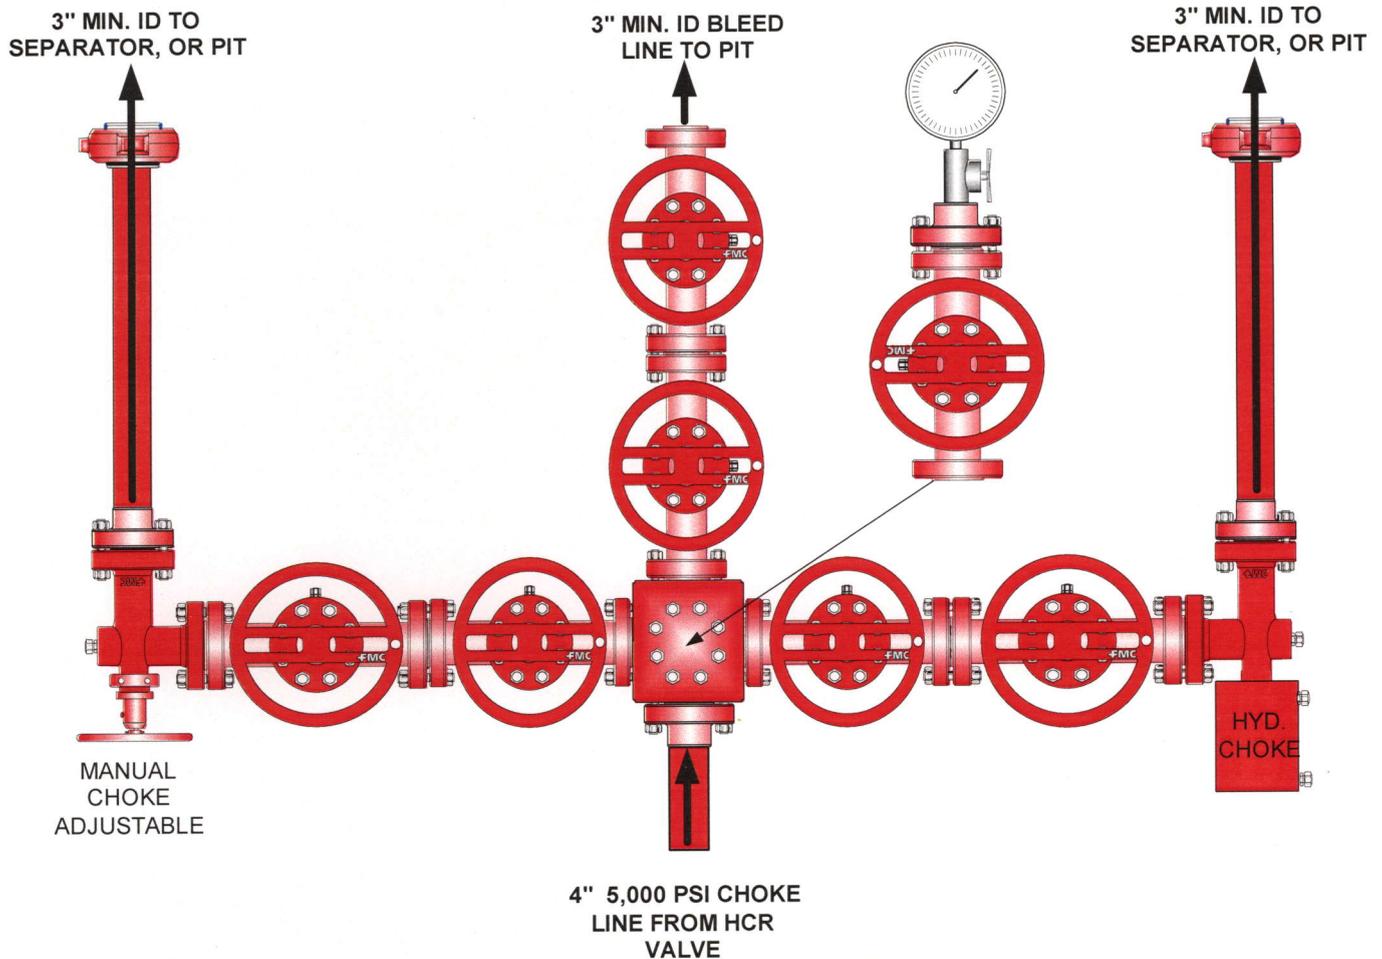

Testing Procedure:

1. BOP will be tested with a professional tester to conform to Onshore Order #2.
2. Blind and Pipe rams will be tested to rated working pressure, 5,000 psi.
3. Annular Preventer will be tested to 50% working pressure, 2,500 psi.
Casing will be tested to 0.22 psi / ft. or 1,500 psi. Not to exceed 70% of burst strength, **whichever is greater.**
4. All lines subject to well pressure will be tested to the same pressure as blind and pipe rams.
5. All BOPE specifications and configurations will meet Onshore Order #2 requirements.



***East Chapita 23-09
SESW, Section 9, T9S, R23E
Uintah County, Utah***

SURFACE USE PLAN

EOG Resources, Inc., hereby applies under Section 28 of the Act of February 25, 1920 (41 state. 449), (30 U.S.C. Section 185) as amended by the Act of November 16, 1973, (87 Stat. 576) and requests that this APD serve as the construction, operations and maintenance plan for the right-of-way application for the pipeline on federal lands. A 30-year right-of-way term is requested.

The request road right-of-way on Federal acreage necessary is approximately 460' x 40', located within Federal Lease # UTU-72634 containing 0.42 acre more or less (see attached survey plats and maps).

The well pad is approximately 325 feet long with a 246-foot width, containing 1.84 acres more or less. The well access road is approximately 3168 feet long with a 40-foot right-of-way, disturbing approximately 2.91 acres. New surface disturbance associated with the well pad and access road is estimated to be 4.74 acres. The pipeline is approximately 1900 feet long with a 20-foot right-of-way disturbing approximately 0.87 acres.

1. EXISTING ROADS:

- A. See attached Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 55.3 miles south of Vernal, Utah – See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary.

2. PLANNED ACCESS ROAD:

- A. The access road will be approximately 3168 in length. 520' located within Section 9, T9S, R22E Federal Lease U-67868, 2188' located within Section 16, T9S, R22E State Lease ML-47065, and 460' located within Section 17, T9S, R22E Federal Lease UTU-72634. Culverts, and/or low water crossings shall be installed as necessary. See attached Topo B.
- B. The access road has a 40-foot ROW w/18 foot running surface.

- C. Maximum grade of the new access road will be 8 percent.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.
- I. A 40-foot permanent right-of-way is requested. No surfacing material will used.
- J. No additional storage areas will be needed for storing equipment, stockpiling, or vehicle parking.

All travel will be confined to existing access road rights-of-way.

New or reconstructed roads will be centerlined – flagged at time of location staking. Access roads and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development, Fourth Edition and/or BLM Manual Section 9113 concerning road construction standards on projects subject to federal jurisdiction.

The road shall be constructed/upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Construction/upgrading shall include ditching, draining, graveling, crowning, and capping the roadbed as necessary to provide a well constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30-foot right-of-way will not be allowed. Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around then avoided.

As operator, EOG Resources, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

Traveling off the 30-foot right-of-way will not be allowed. The access road and associated drainage structures will be constructed and maintained in accordance with road guidelines contained in the joint BLM/USFS publication: Surface Operating Standards for Oil and Gas Exploration and Development, Third Edition, and/or BLM Manual Section 9113 concerning road construction standards on projects subject to federal jurisdiction. During the drilling and production phase of operations, the road surface and shoulders will be kept in a safe and useable condition and drainage ditches and culverts will be kept clear and free flowing.

EOG requests a 460-foot road right-of-way, for the portion of the access road located within Section 17, T9S, R22E Federal Lease # UTU-72634.

3. LOCATION OF EXISTING WELLS WITHIN A ONE-MILE RADIUS:

See attached TOPO map "C" for the location of wells within a one-mile radius.

4. LOCATION OF EXISTING AND/OR PROPOSED PRODUCTION FACILITIES:

A. On Well Pad

- 1. Due to proximity to Coyote Wash flood plain, production facilities consisting of combo separator-dehy unit with meter, two (2) 400-bbl vertical tanks and attaching piping will be placed off site on proposed EC 24-09 location, if the well is successfully completed for production.**

Facilities on the proposed location will consist of wellhead valves and attaching piping.

2. Gas gathering lines – A 4" gathering line will be buried from dehy to the edge of the location.

B. Off Well Pad

1. Proposed pipeline will transport natural gas.
2. The pipeline will be a permanent feeder line.
3. The length of the proposed pipeline is 1900 x 40'. The proposed pipeline leaves the northern edge of the well pad (Lease UTU-67868) proceeding in a northerly then easterly direction for an approximate distance of 1900' tying into a proposed pipeline for East Chapita 24-09 in the SWSE of Section 9, T9S, R23E (Lease UTU-67868). Pipe will be 4" NOM, 0.156 wall, Grade X42, Zap-Lock, electric weld with a 35 mil X-Tru coating.
4. Proposed pipeline will be a 4" OD steel, zap-lok line laid on the surface
5. Proposed pipeline will be laid on surface.
6. A 20-foot permanent pipeline right-of-way is requested. A 40-foot temporary pipeline right-of-way for construction purposes is requested, the temporary right-of-way will be utilized for a 10-day period.
7. The proposed pipeline route begins in the SESW of section 9, township 9S, range 23E, proceeding northerly then easterly for an approximate distance of 1900' to the SWSE of section 9, township 9S, range 23E.
8. Pipeline will be coupled using the Zap lock method. No additional off-pad facilities will be required.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within 6 months of installation. **All facilities will be painted with Carlsbad Canyon.** Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

5. LOCATION AND TYPE OF WATER SUPPLY:

- A. Water supply will be from Ouray Municipal Water Plant at Ouray, Utah, and/or Bonanza Power Plant water source in Sec 26, T8S, R23E Uintah County, UT (State Water Right # 49-225(A31368)). Water will be hauled by a licensed trucking company.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. SOURCE OF CONSTRUCTION MATERIALS:

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of the location.
- B. No mineral materials will be required.

7. METHODS OF HANDLING WASTE DISPOSAL:

A. METHODS AND LOCATION

- 1. Cuttings will be confined in the reserve pit.
- 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
- 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah County Landfill.
- 4. Produced wastewater will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. After the 90 day period, the produced water will be contained in a tank on location and then disposed of at one of the following locations: Natural Buttes Unit 21-20B SWD, Ace Disposal, CWU 550-30N SWD or EOG Resources, Inc. drilling operations (Chapita Wells Unit, Natural Buttes Unit & Stagecoach Unit).
- 5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.

- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporation or by removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons will be avoided by flaring them off in the flare pit at the time of recovery.

The proposed location will be drilling utilizing a closed loop system.

EOG Resources, Inc. maintains a file, per 29 CFR 1910.1200 (g) containing current Material Safety Data Sheets (MSDS) for all chemicals, compounds, and/or substances which are used during the course of construction, drilling, completion, and production operations for this project. Hazardous materials (substances) which may be found at the site may include drilling mud and cementing products which are primarily inhalation hazards, fuels (flammable and/or combustible), materials that may be necessary for well completion/ stimulation activities such as flammable or combustible substances and acids/gels (corrosives). The opportunity for Superfund Amendments and Reauthorization Act (SARA) listed Extremely Hazardous Substances (EHS) at the site is generally limited to proprietary treating chemicals. All hazardous and EHS and commercial preparations will be handled in an appropriate manner to minimize the potential for leaks or spills to the environment.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completion of the well. Furthermore, extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will not be used, produced, stored, transported, or disposed of in association with the drilling, testing or completion of the well.

8. ANCILLARY FACILITIES:

None anticipated.

9. WELL SITE LAYOUT:

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The closed loop system will be located on the east corner of the location. The flare pit will be located downwind of the prevailing wind direction on the south side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

Upon completion of construction, the stockpiled topsoil from the location will be broadcast seeded with the approved seed mixture from this location and then walked down with a Caterpillar tractor.

Access to the well pad will be from the east.

FENCING REQUIREMENTS:

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BLM or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is regularly traveled. If the well is a producer, the cattleguards (shall/shall not) be permanently counted on concrete bases. Prior to crossing any fence located on Federal land, or any fence between Federal land and private land, the operator will contact the BLM, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

10. PLANS FOR RECLAMATION OF THE SURFACE:

A. Interim Reclamation (Producing Location)

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

Seed Mixture	Drilled Rate (lbs./acre PLS*)
Crested Wheatgrass	6.0
Needle and Threadgrass	6.0

*Pure live seed (PLS) formula: percent of purity of seed mixture times percent germination of seed mixture equals portion of seed mixture that is PLS.

B. Dry Hole/Abandoned Location

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BLM will attach the appropriated surface rehabilitation conditions of approval.

Seed Mixture	Drilled Rate (lbs./acre PLS*)
Fourwing saltbush	3.0
Indian ricegrass	2.0
Needle and Threadgrass	2.0
Crested Wheatgrass	1.0
Scarlet globe mallow	1.0

*Pure live seed (PLS) formula: percent of purity of seed mixture times percent germination of seed mixture equals portion of seed mixture that is PLS.

B. Reclamation of off lease/unit rights-of-way for roads, pipelines and powerlines:

Immediately upon completion, the access road the surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk.

The portion of the right-of-way not needed for travel or ditching will be recontoured to the approximate natural contours within 90 days from the date of the completion, or as soon as environmental conditions allow.

Upon termination or relinquishment the road shall be ripped and recontoured to its original contours and reseeded with a BLM prescribed seed mixture.

11. SURFACE OWNERSHIP:

Surface ownership of the proposed well site, access road, and pipeline route is as follows:

Bureau of Land Management

12. OTHER INFORMATION:

A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the Authorized Officer. Within five working days the Authorized Officer will inform the operator as to:

- Whether the materials appear eligible for the National Register of Historic Places;
- The mitigation measures the operator will likely have to undertake before the site can be used.

- A time frame for the Authorized Officer to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the Authorized Officer are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the Authorized Officer will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The Authorized Officer will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the Authorized Officer that required mitigation has been completed, the operator will then be allowed to resume construction.

- B. As operator, EOG Resources, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BLM administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.
- C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on BLM lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)
- D. The drilling rig and ancillary equipment will be removed from the location prior to commencement of completion operations. Completion operations will be conducted utilizing a completion/workover rig.

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice of Lessees. The operator is fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Construction activity will not be conducted using frozen or saturated soils material or during periods when watershed damage is likely to occur.

If the existing access road, proposed access road, and proposed pad are dry during construction, drilling, and completion activities, water will be applied to help facilitate compaction during construction and to minimize soil loss as a result of wind erosion.

A cultural resources survey was conducted and submitted March 14, 2006 MOAC report # 06-34, by Montgomery Archaeological Consultants. A paleontology survey was conducted and submitted May 19, 2006 IPC report # 06-17 by Intermountain Paleo.

LESSEE OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:

PERMITTING AGENT

Kaylene R. Gardner
EOG Resources, Inc.
P.O. Box 1815
Vernal, Ut 84078
(435) 781-9111

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved plan of operations, and any applicable Notice to Lessees. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

The operator or his/her contractor shall contact the BLM office at (435) 781-4400 forth-eight (48) hours prior to construction activities.


The BLM Office shall be notified upon site completion prior to moving on the drilling rig.

CERTIFICATION:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by EOG Resources, Inc. and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

Please be advised that EOG Resources, Inc. is considered to be the operator of the East Chapita 23-09 Well, located in the SESW, of Section 9, T9S, R23E, Uintah County, Utah; Federal land and minerals; and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond Coverage is under Bond # NM 2308.

September 14, 2007
Date



Kaylene R. Gardner, Lead Regulatory Assistant

EOG RESOURCES, INC.

EAST CHAPITA #23-9

LOCATED IN UINTAH COUNTY, UTAH

SECTION 9, T9S, R23E, S.1.B.&M.

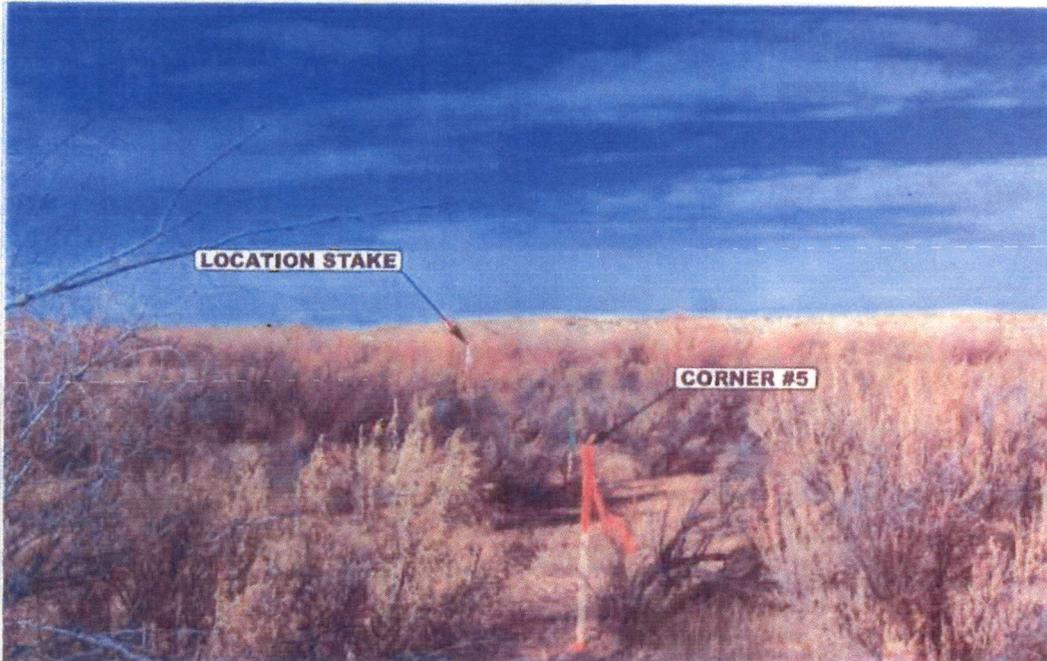


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHEASTERLY



- Since 1964 -

UELS

Uintah Engineering & Land Surveying

85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

01 05 06
MONTH DAY YEAR

PHOTO

TAKEN BY: GS.

DRAWN BY: B.C.

REVISED: 05-03-07C.P.


EOG RESOURCES, INC.
EAST CHAPITA #23-9
SECTION 9, T9S, R23E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 0.3 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 12.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 1.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 1.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 0.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN LEFT AND PROCEED IN A SOUTHEASTERLY, THEN NORTHEASTERLY DIRECTION APPROXIMATELY 5.0 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHWEST; TURN LEFT AND PROCEED IN A NORTHWESTERLY, THEN NORTHERLY DIRECTION APPROXIMATELY 2.0 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTHEAST; FOLLOW ROAD FLAGS IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.6 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 55.3 MILES.


EOG RESOURCES, INC.

LOCATION LAYOUT FOR
EAST CHAPITA #23-9
SECTION 9, T9S, R23E, S.L.B.&M.
470' FSL 2150' FWL

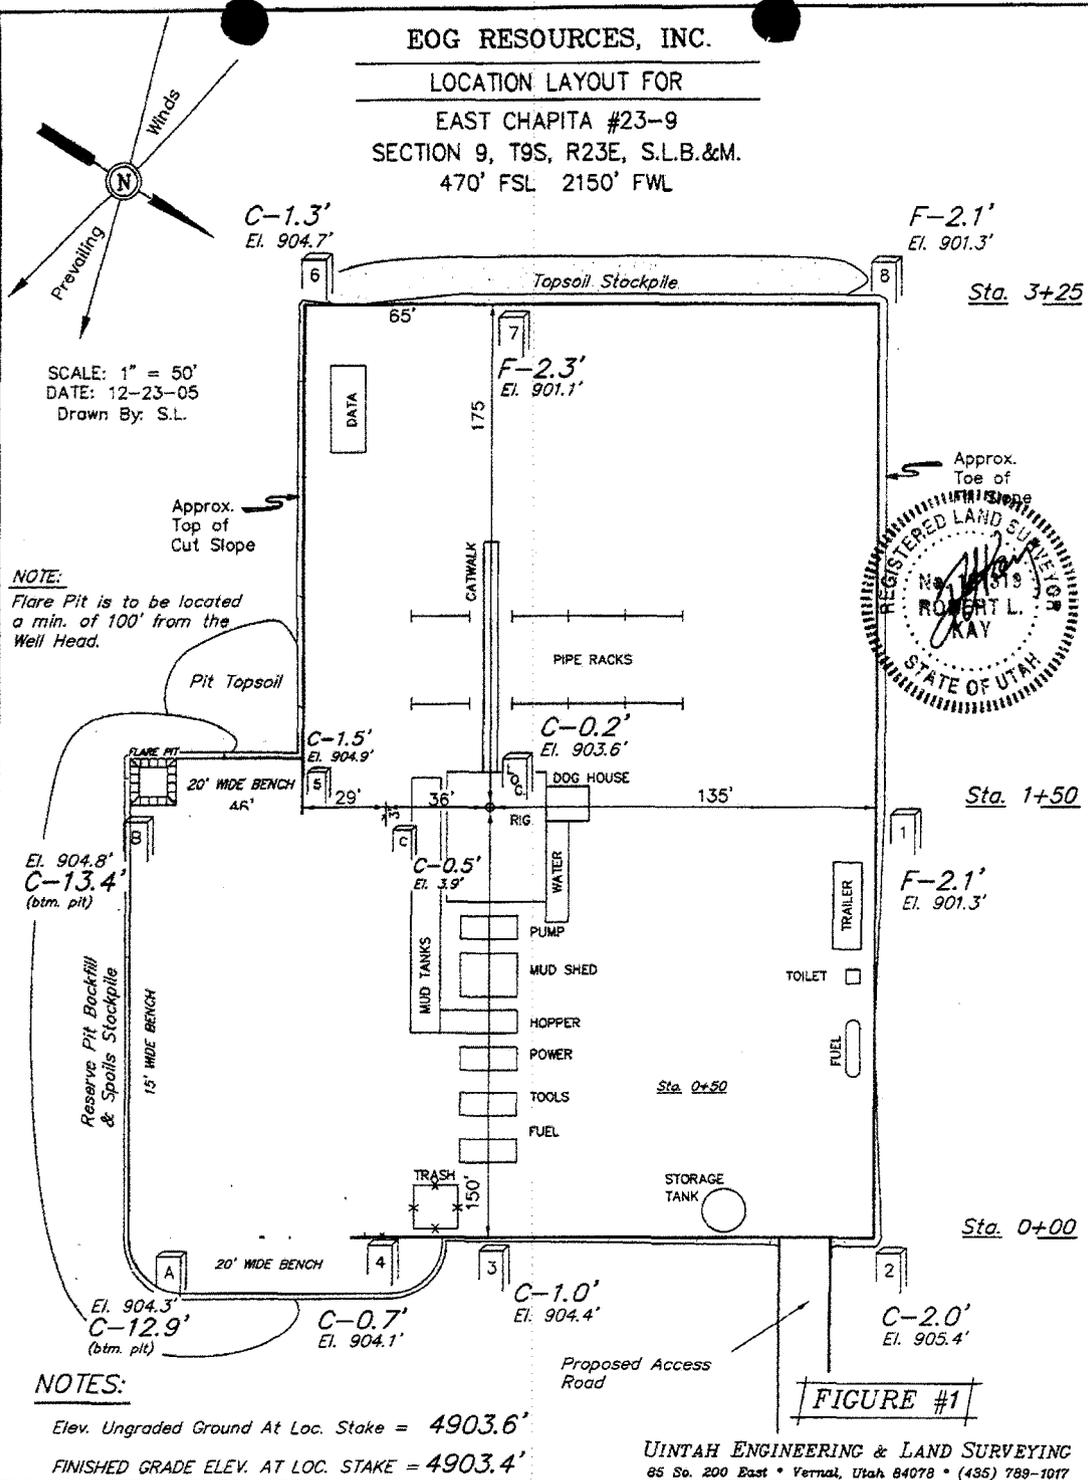

SCALE: 1" = 50'
DATE: 12-23-05
Drawn By: S.L.

NOTE:
Flare Pit is to be located
a min. of 100' from the
Well Head.



NOTES:

Elev. Ungraded Ground At Loc. Stake = 4903.6'
FINISHED GRADE ELEV. AT LOC. STAKE = 4903.4'

FIGURE #1


UINTEH ENGINEERING & LAND SURVEYING
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017

EOG RESOURCES, INC.






FIGURE #2

TYPICAL CROSS SECTIONS FOR

EAST CHAPITA #23-9
SECTION 9, T9S, R23E, S.L.B.&M.
470' FSL 2150' FWL



DATE: 12-23-05
Drawn By: S.L.

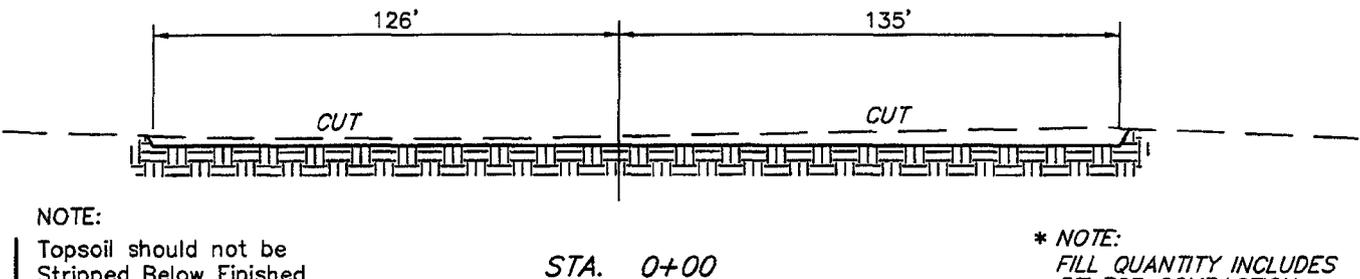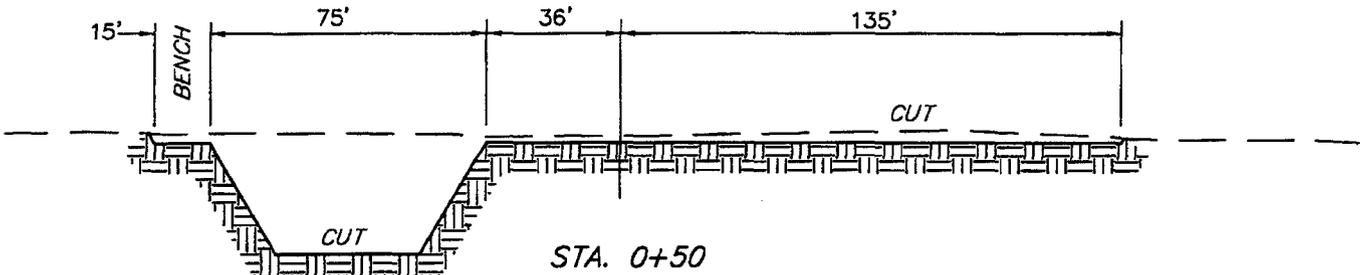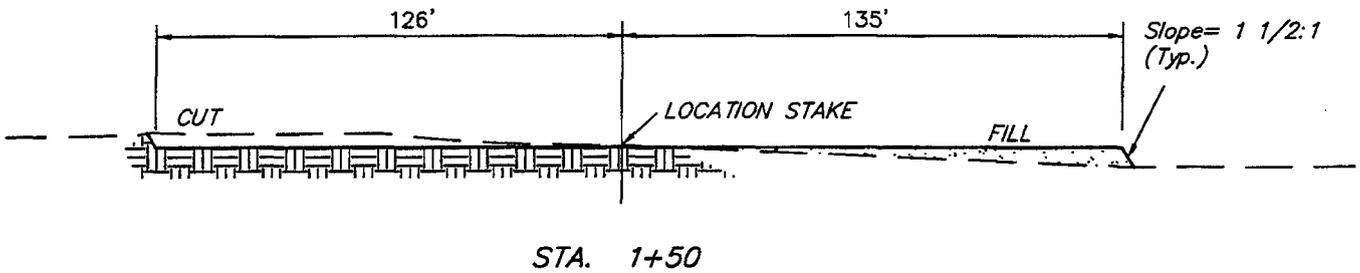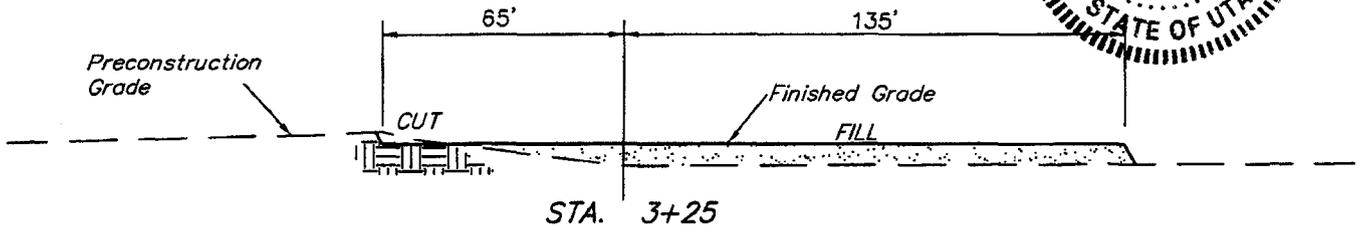

NOTE:
Topsoil should not be Stripped Below Finished Grade on Substructure Area.


* NOTE:
FILL QUANTITY INCLUDES 5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,510 Cu. Yds.
Remaining Location	= 4,170 Cu. Yds.
TOTAL CUT	= 5,680 CU.YDS.
FILL	= 2,510 CU.YDS.

EXCESS MATERIAL	= 3,170 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 3,170 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

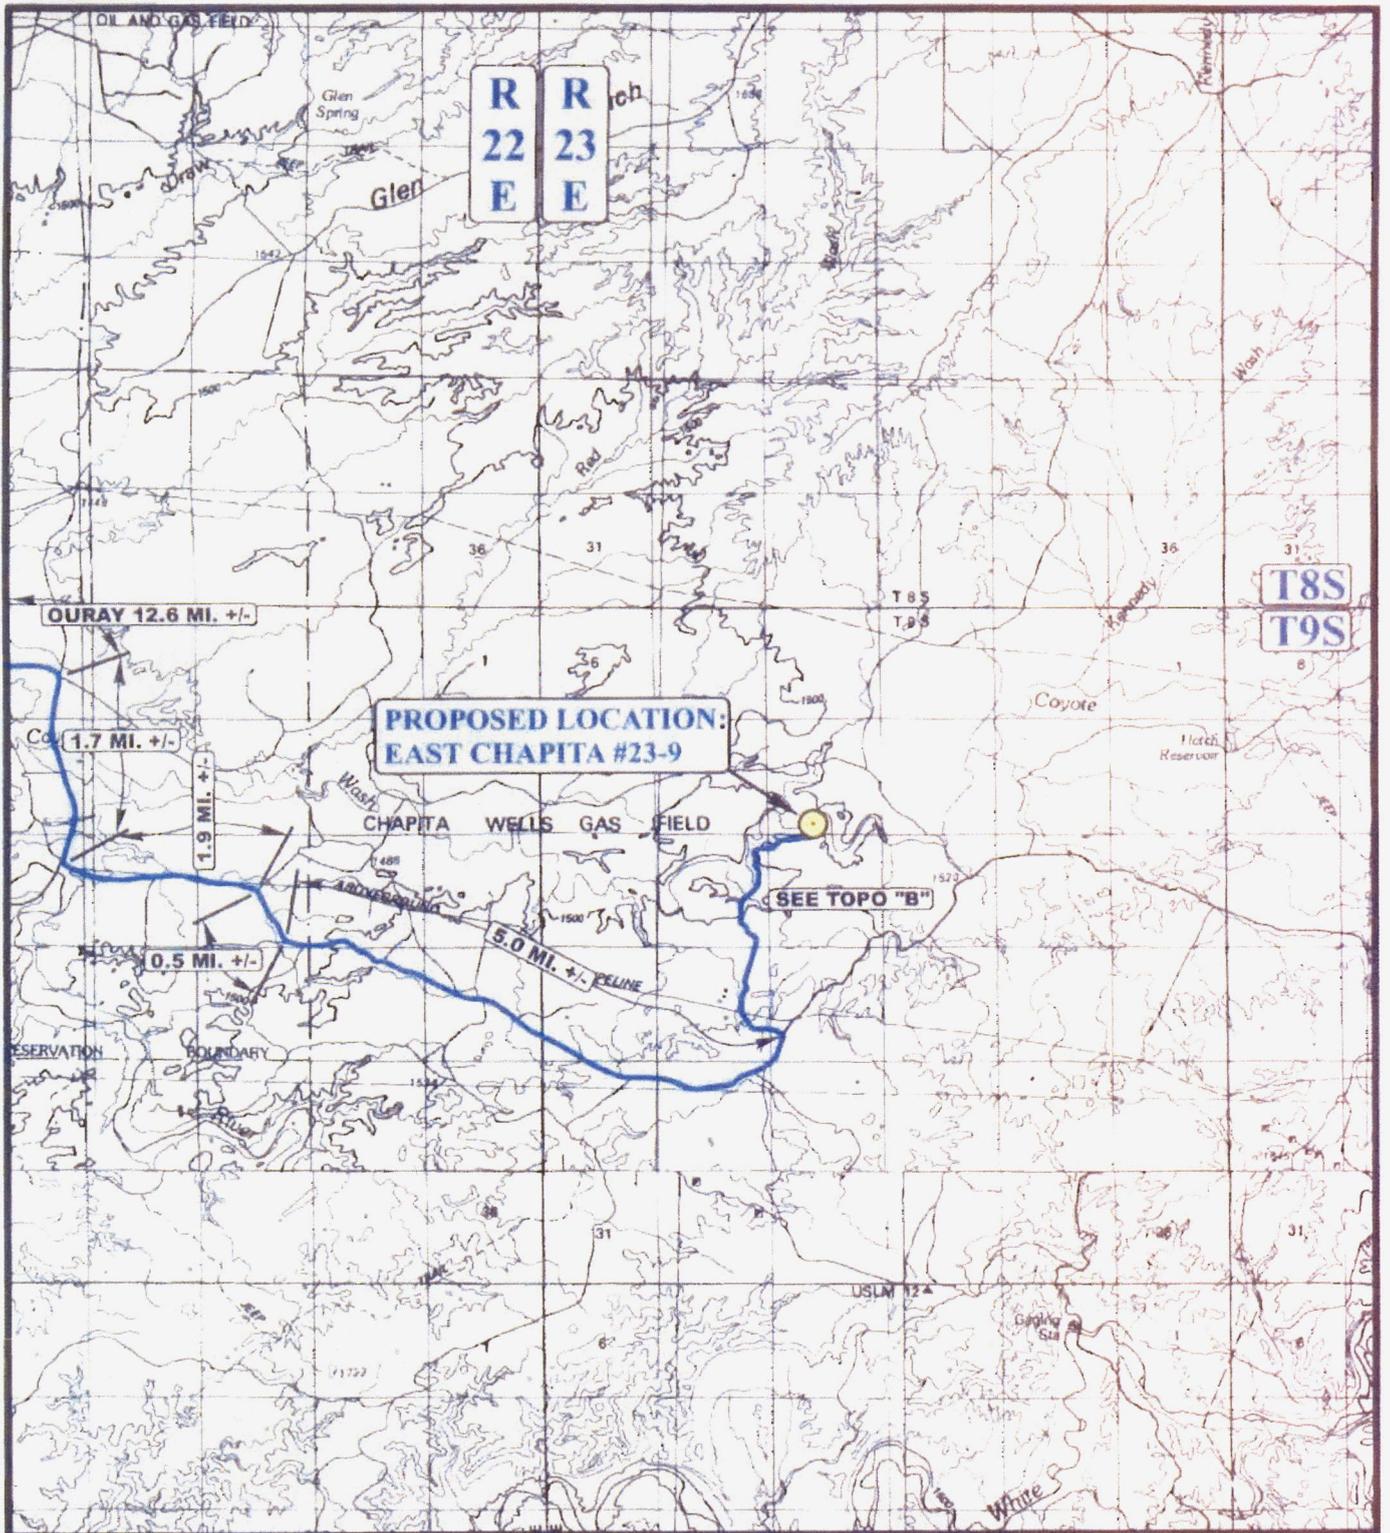

LEGEND:

 PROPOSED LOCATION

N

EOG RESOURCES, INC.

EAST CHAPITA #23-9
SECTION 9, T9S, R23E, S.L.B.&M.
470' FSL 2150' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

01 05 06
 MONTH DAY YEAR

SCALE: 1:100,000


DRAWN BY: B.C.

REVISED: 05-03-07C.P.



R
23
E

T9S

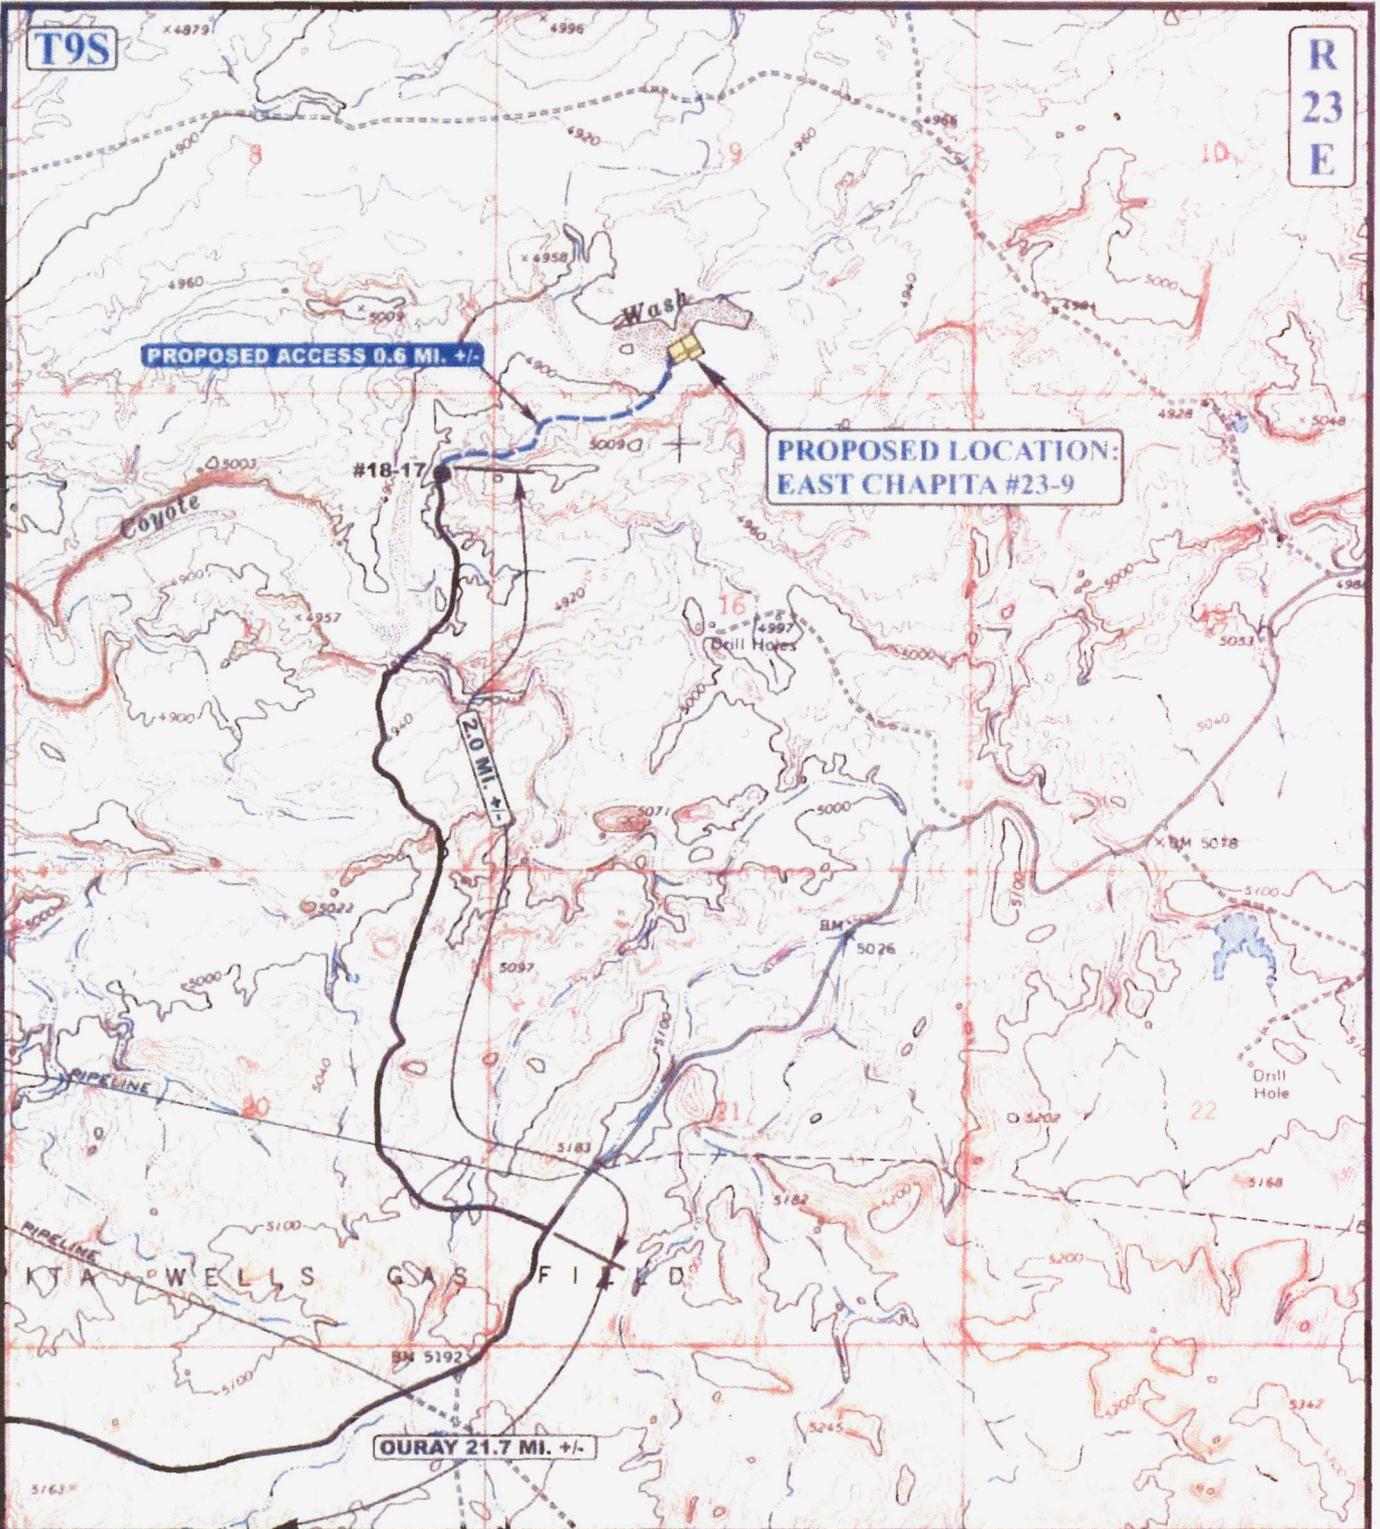

LEGEND:

-  EXISTING ROAD
-  PROPOSED ACCESS ROAD

EOG RESOURCES, INC.

EAST CHAPITA #23-9
 SECTION 9, T9S, R23E, S.L.B.&M.
 470' FSL 2150' FWL




Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP 01 05 06
MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: B.C. REVISED: 05-03-07C.P.



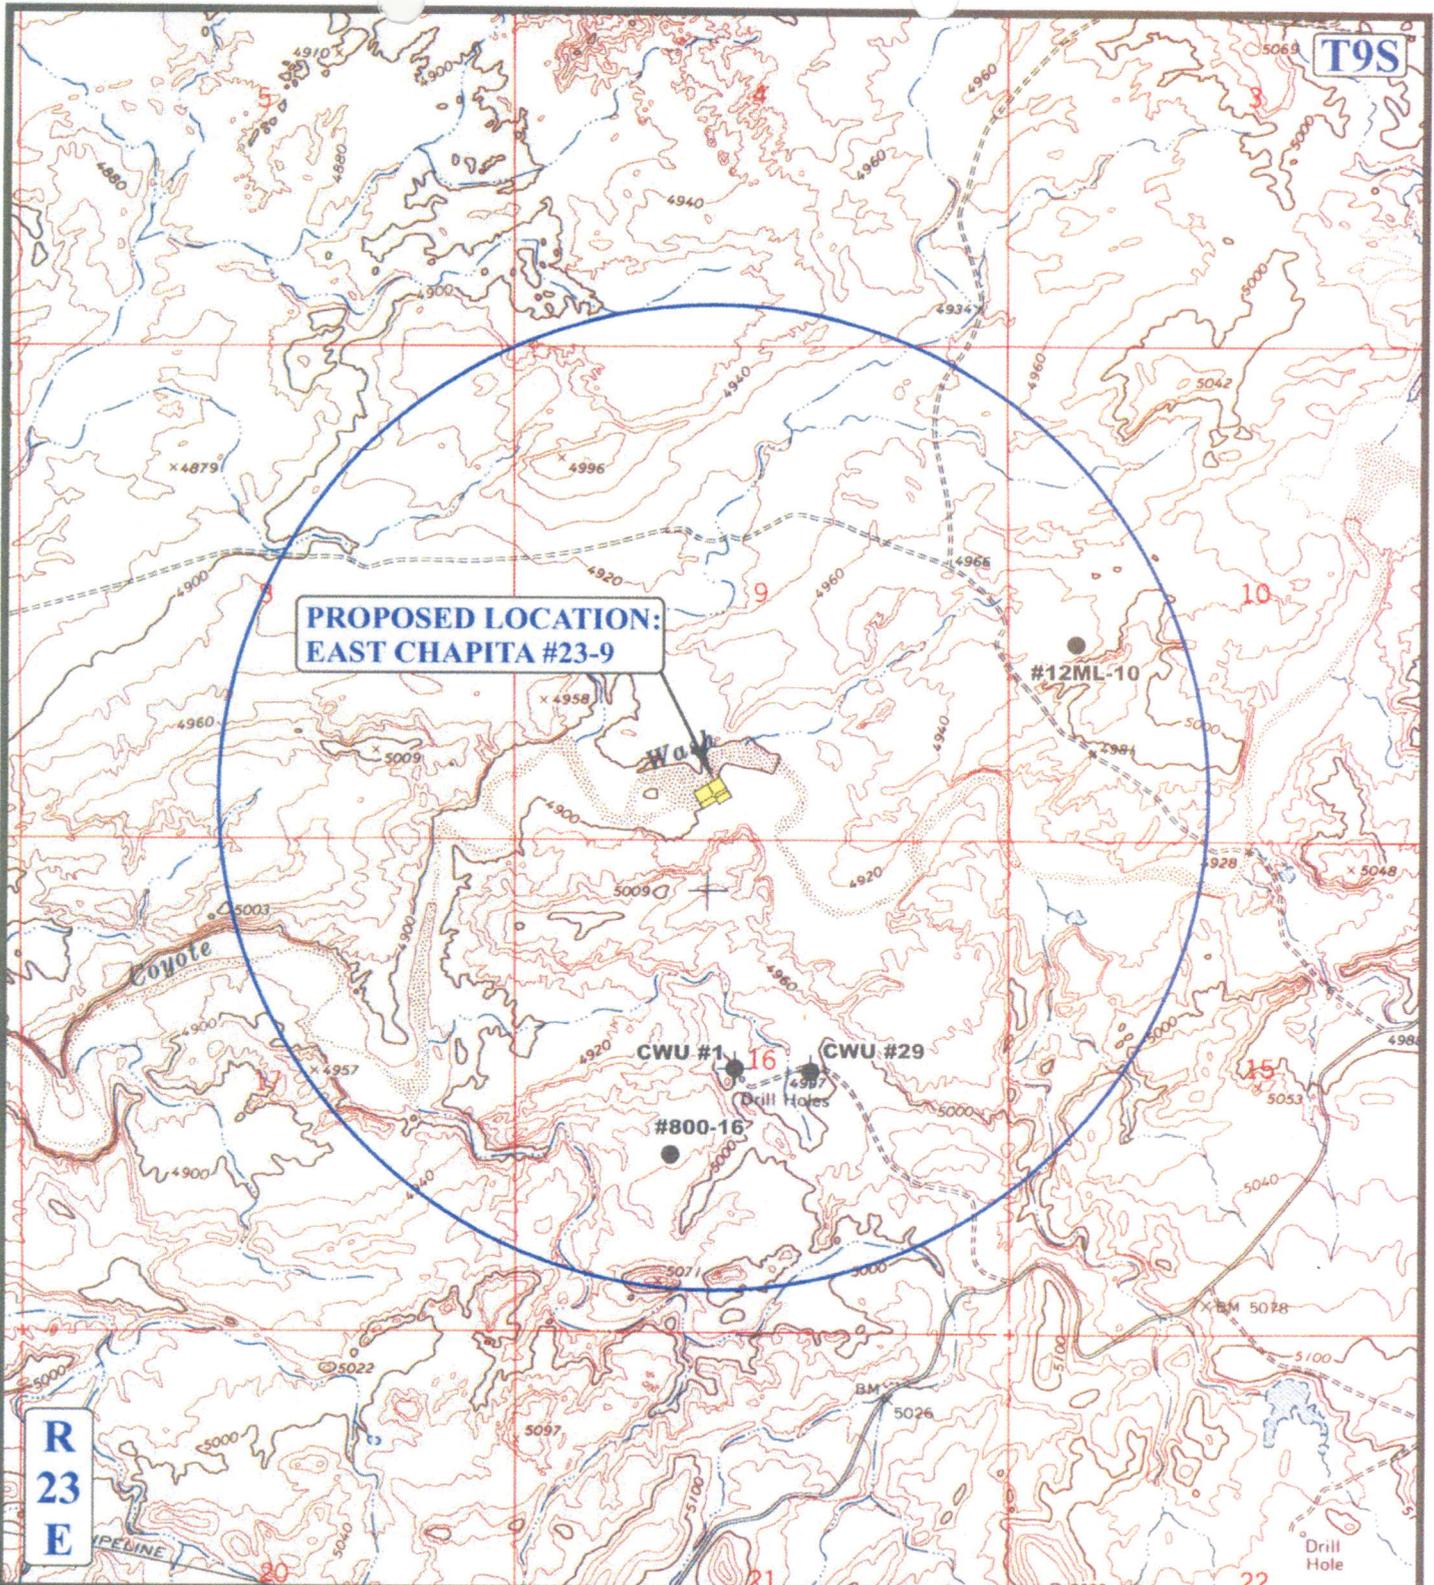

**PROPOSED LOCATION:
EAST CHAPITA #23-9**

**R
23
E**

T9S

- LEGEND:**
- ⊗ DISPOSAL WELLS
 - PRODUCING WELLS
 - ⊖ SHUT IN WELLS
 - ⊗ WATER WELLS
 - ⊖ ABANDONED WELLS
 - ⊖ TEMPORARILY ABANDONED

EOG RESOURCES, INC.

**EAST CHAPITA #23-9
SECTION 9, T9S, R23E, S.L.B.&M.
470' FSL 2150' FWL**




Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP 01 05 06
MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: B.C. REVISED: 00-00-00



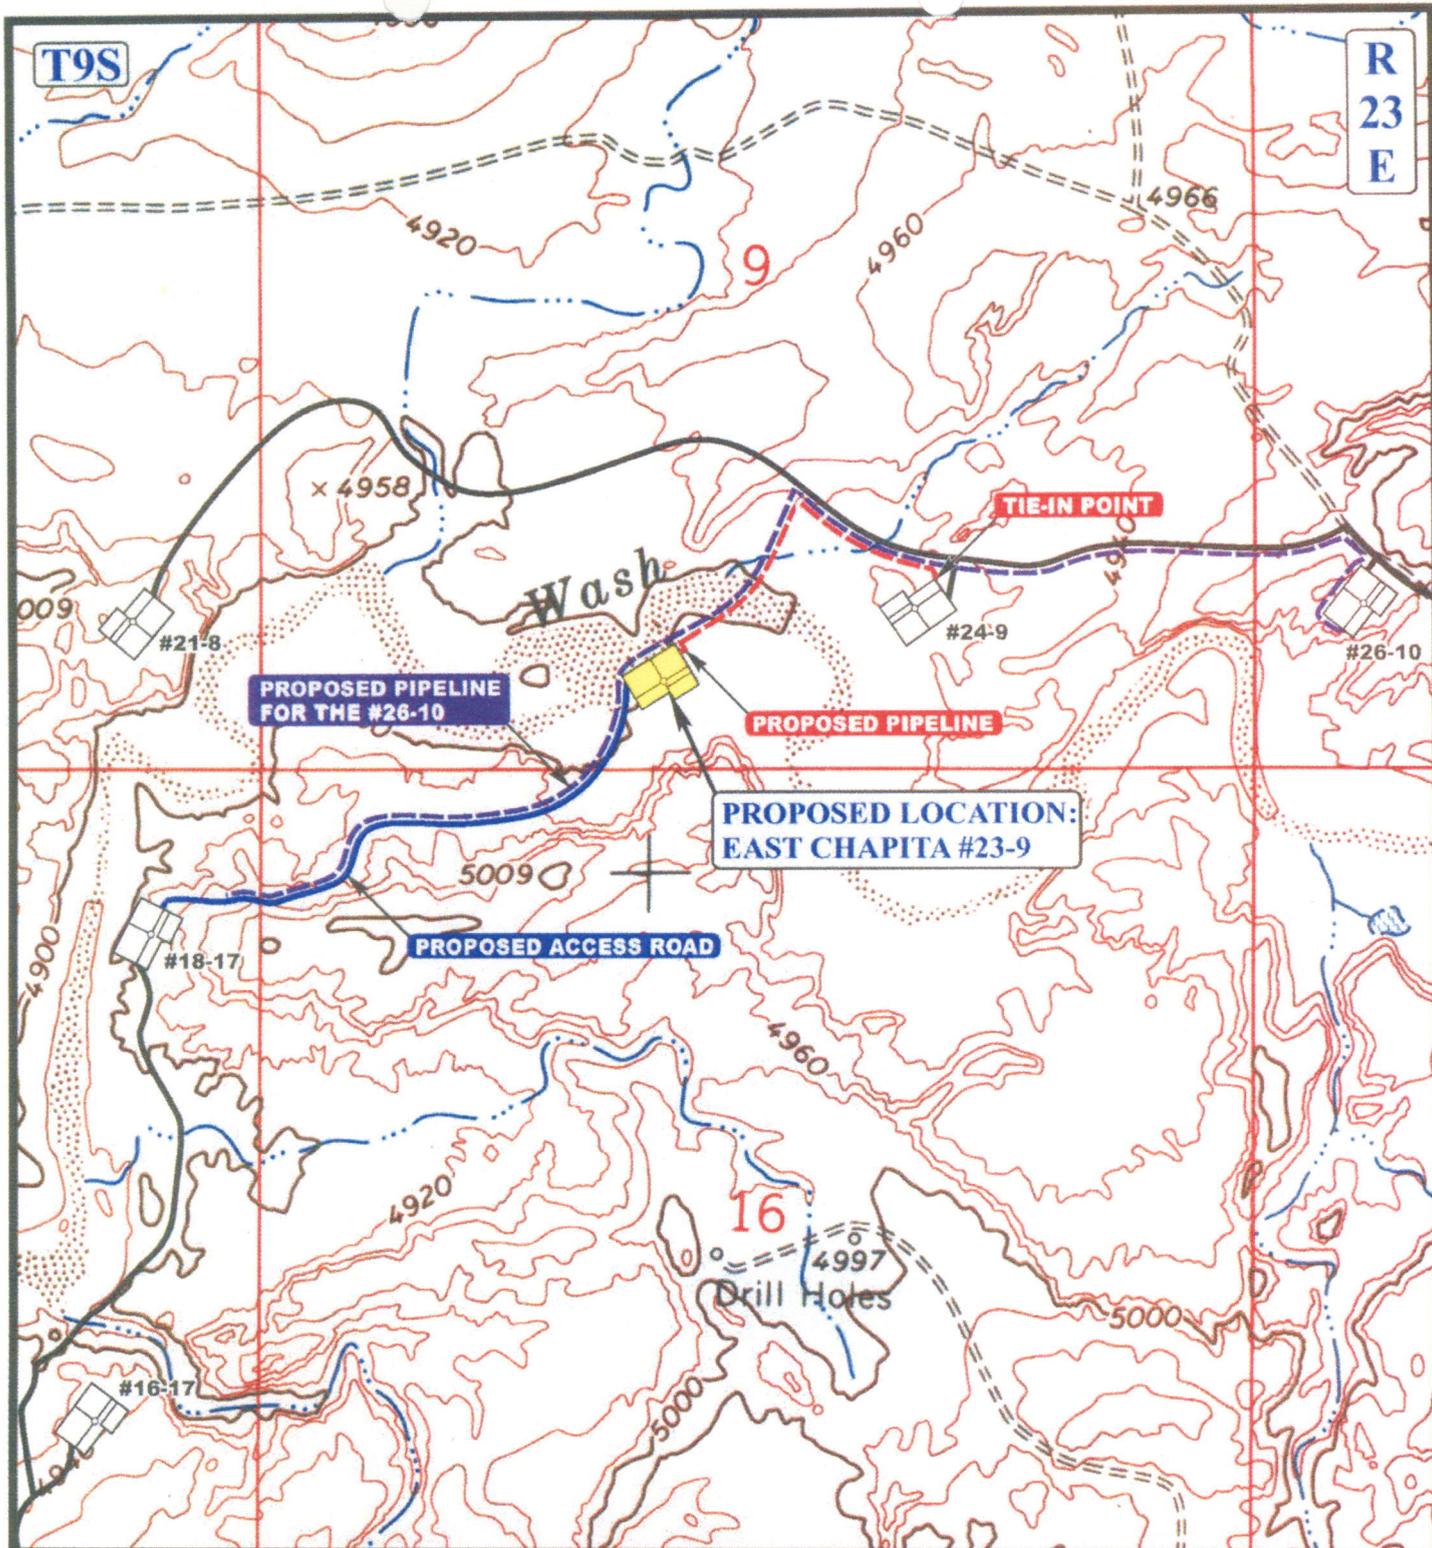

APPROXIMATE TOTAL PIPELINE DISTANCE = 2,000' +/-

LEGEND:

-  PROPOSED ACCESS ROAD
-  PROPOSED PIPELINE
-  PROPOSED PIPELINE (SERVICING OTHER WELLS)

EOG RESOURCES, INC.

EAST CHAPITA #23-9
SECTION 9, T9S, R23E, S.L.B.&M.
470' FSL 2150' FWL




Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC 01 05 06
MAP MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: B.C. REVISED: 08-03-07C.P.



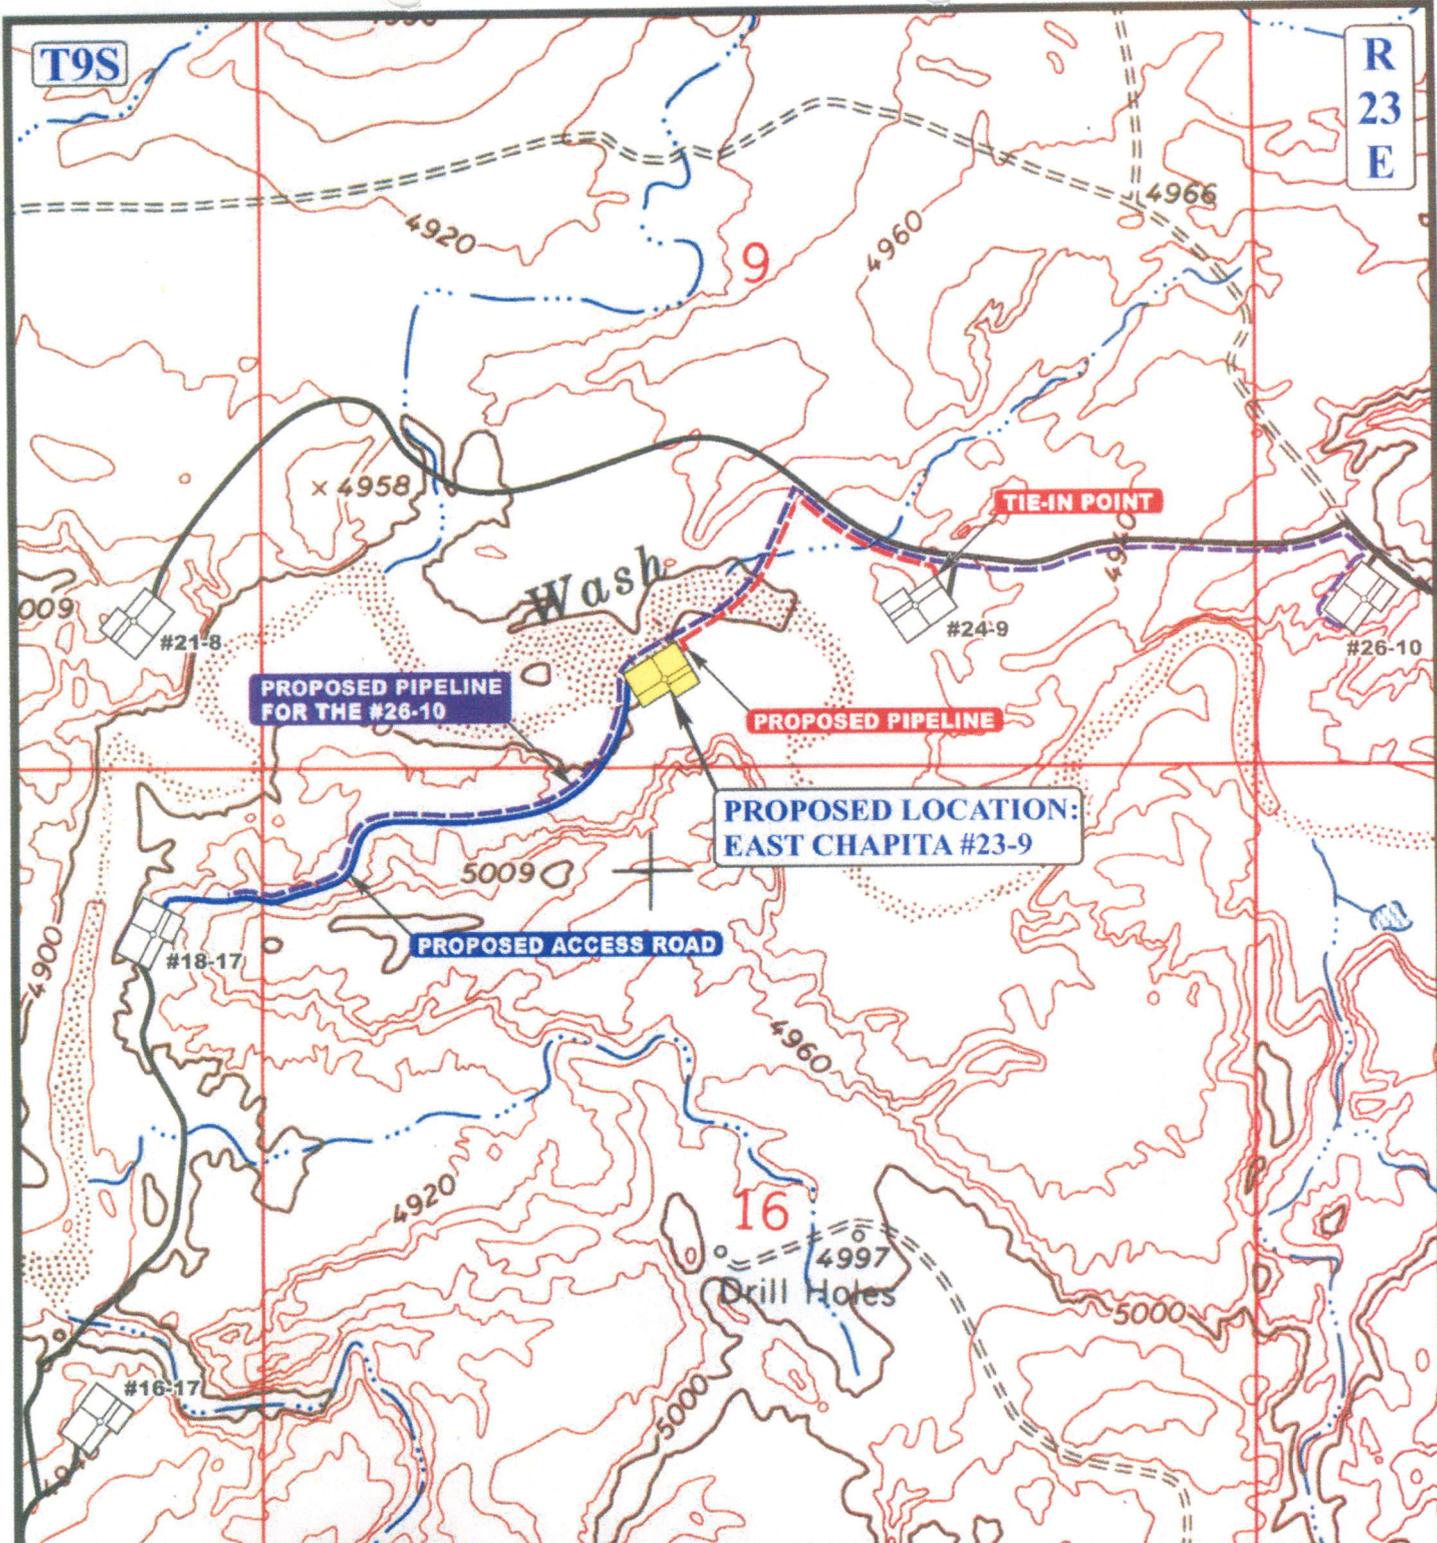

APPROXIMATE TOTAL PIPELINE DISTANCE = 2,000' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- - - - - PROPOSED PIPELINE
- - - - - PROPOSED PIPELINE (SERVICING OTHER WELLS)



EOG RESOURCES, INC.

EAST CHAPITA #23-9
SECTION 9, T9S, R23E, S.L.B.&M.
470' FSL 2150' FWL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

01 05 06
 MONTH DAY YEAR



SCALE: 1" = 1000' DRAWN BY: B.C. REVISED: 08-03-07C.P.

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 09/19/2007

API NO. ASSIGNED: 43-047-39637

WELL NAME: E CHAPITA 23-09
 OPERATOR: EOG RESOURCES INC (N9550)
 CONTACT: KAYLENE GARDNER

PHONE NUMBER: 435-781-9111

PROPOSED LOCATION:

SESW 09 090S 230E
 SURFACE: 0470 FSL 2150 FWL
 BOTTOM: 0470 FSL 2150 FWL
 COUNTY: UINTAH
 LATITUDE: 40.04453 LONGITUDE: -109.3330
 UTM SURF EASTINGS: 642213 NORTHINGS: 4433821
 FIELD NAME: NATURAL BUTTES (630)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering	DGD	3/17/08
Geology		
Surface		

LEASE TYPE: 1 - Federal
 LEASE NUMBER: UTU67868
 SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: PRRV
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. NM 2308)
- N Potash (Y/N)
- N Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 49-225)
- N RDCC Review (Y/N)
(Date: _____)
- NA Fee Surf Agreement (Y/N)
- Y Intent to Commingle (Y/N)
(Wasatch, mesa verde)

LOCATION AND SITING:

- ___ R649-2-3.
- Unit: _____
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- ___ R649-3-3. Exception
- ___ Drilling Unit
Board Cause No: _____
Eff Date: _____
Siting: _____
- ___ R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: _____

- 1- Sealing Approval
- 2- Spacing Slip
- 3- Commingling Approval

E CHAPITA 46-05

E CHAPITA 41-04

E CHAPITA 42-04

E CHAPITA 75-04

E CHAPITA 76-04

T9S R23E

NATURAL BUTTES FIELD

9

NBE *
4ML-10-9-23

NBE *
5ML-10-9-23

NBE
12ML-10-9-23
NBE *
12SWD-10-9-23

E CHAPITA 21-08

E CHAPITA 22-09

E CHAPITA 24-09

E CHAPITA 25-09

E CHAPITA 26-10

E CHAPITA 23-09

E CHAPITA 18-17

E CHAPITA 57-16

E CHAPITA 58-16

E CHAPITA 60-16

OPERATOR: EOG RESOURCES INC (N9550)

SEC: 9 T.9S R. 23E

FIELD: NATURAL BUTTES (630)

COUNTY: UINTAH

SPACING: R649-3-2 / GENERAL SITING

- Field Status**
- ABANDONED
 - ACTIVE
 - COMBINED
 - INACTIVE
 - PROPOSED
 - STORAGE
 - TERMINATED

- Unit Status**
- EXPLORATORY
 - GAS STORAGE
 - NF PP OIL
 - NF SECONDARY
 - PENDING
 - PI OIL
 - PP GAS
 - PP GEOTHERML
 - PP OIL
 - SECONDARY
 - TERMINATED

- Wells Status**
- GAS INJECTION
 - GAS STORAGE
 - LOCATION ABANDONED
 - NEW LOCATION
 - PLUGGED & ABANDONED
 - PRODUCING GAS
 - PRODUCING OIL
 - SHUT-IN GAS
 - SHUT-IN OIL
 - TEMP. ABANDONED
 - TEST WELL
 - WATER INJECTION
 - WATER SUPPLY
 - WATER DISPOSAL
 - DRILLING



PREPARED BY: DIANA MASON
DATE: 20-SEPTEMBER-2007

From: <Mary_Maestas@eogresources.com>
To: "Dustin Doucet" <dustindoucet@utah.gov>
Date: 3/19/2008 7:56 AM
Subject: Re: Commingling Requests
Attachments: Hoss 65-36 commingling.pdf; ECW 23-09.doc; Hoss 71-33.doc

Dustin,

I believe the attachments below are what you need. The East Chapita 23-09 and Hoss 71-33 attachments are revised drilling plans that include the commingling verbiage. The Hoss 65-36 attachment is what was included with the BLM-submitted APD. If you need any more information, please let me know.

Mary Maestas

"Dustin Doucet" <dustindoucet@utah.gov>
03/18/2008 02:46 PM

To
<mary_Maestas@eogresources.com>
cc

Subject
Commingling Requests

Mary,

I recently received a few requests and had a question on one. These are the ones that were supposed to be in the APD but were not approved. Two were o.k., but one was not in the APD. This well was the Hoss 65-36 (API 43-047-38363). Your sundry references a 1/2/2007 submittal. I think that is referencing an APD that was submitted to the BLM as ours was approved 7/13/06. You have supplied all the info on this except I wanted a copy of the request that was submitted to the other owners (mainly the commingling method language). If you could send that over, I will process the sundry.

Also I have a couple of APD's that I am still waiting for the commingling method language on as well. The affidavit and map were included with the APD but the commingling method and request were left out. If you could get me an updated page or plan that includes this, I will pass these on as well. The APD's in question are the following:

East Chapita 23-09
HOss 71-33

Please send this as soon as possible and I will get them off my desk.
Thanks.

Dustin

Dustin K. Doucet
Petroleum Engineer
Utah Division of Oil, Gas and Mining
Oil and Gas Program
1594 West North Temple, Suite 1210
Salt Lake City, UT 84116

Phone: (801) 538-5281
fax: (801) 359-3940
email: dustindoucet@utah.gov



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah
DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil Gas and Mining

JOHN R. BAZA
Division Director

March 20, 2008

EOG Resources, Inc.
1060 East Highway 40
Vernal, UT 84078

Re: East Chapita 23-09 Well, 470' FSL, 2150' FWL, SE SW, Sec. 9, T. 9 South, R. 23 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

Administrative approval for commingling the production from the Wasatch formation and the Mesaverde formation in this well is hereby granted. Appropriate information has been submitted to DOGM in accordance with R649-3-22. No written objections from owners were received by DOGM.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-39637.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal Office

Operator: EOG Resources, Inc.

Well Name & Number East Chapita 23-09

API Number: 43-047-39637

Lease: UTU67868

Location: SE SW **Sec.** 9 **T.** 9 South **R.** 23 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1, *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division with 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281 office (801) 733-0983 home

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

FORM APPROVED
OMB No. 1004-0136
Expires July 31, 2010

SEP 17 2007

BLM

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU67868
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator EOG RESOURCES INC Contact: KAYLENE R GARDNER E-Mail: kaylene_gardner@eogresources.com		7. If Unit or CA Agreement, Name and No.
3a. Address 1060 EAST HIGHWAY 40 VERNAL, UT 84078	3b. Phone No. (include area code) Ph: 435-781-9111	8. Lease Name and Well No. EAST CHAPITA 23-09
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SESW 470FSL 2150FWL At proposed prod. zone SESW 470FSL 2150FWL		9. API Well No. 43-047-39637
14. Distance in miles and direction from nearest town or post office* 55.3 MILES SOUTH OF VERNAL, UTAH		10. Field and Pool, or Exploratory NATURAL BUTTES
15. Distance from proposed location to nearest property or lease line. ft. (Also to nearest drig. unit line, if any) 470	16. No. of Acres in Lease 1078.83	11. Sec., T., R., M., or Blk. and Survey or Area Sec 9 T9S R23E Mer SLB SME: BLM
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 3900	19. Proposed Depth 9150 MD 9150 TVD	12. County or Parish UINTAH
21. Elevations (Show whether DF, KB, RT, GL, etc.) 4904 GL	22. Approximate date work will start	13. State UT
23. Estimated duration 45 DAYS		17. Spacing Unit dedicated to this well
20. BLM/BIA Bond No. on file NM2308		24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- 1. Well plat certified by a registered surveyor.
- 2. A Drilling Plan.
- 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- 5. Operator certification
- 6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature (Electronic Submission)	Name (Printed/Typed) KAYLENE R GARDNER Ph: 435-781-9111	Date 09/17/2007
--	--	--------------------

Title
LEAD REGULATORY ASSISTANT

Approved by (Signature) <i>Naomi Hatch</i>	Name (Printed/Typed) Naomi Hatch	Date 7/22/08
---	-------------------------------------	-----------------

Title Assistant Field Manager Lands & Mineral Resources	Office VERNAL FIELD OFFICE
---	-------------------------------

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

Electronic Submission #56348 verified by the BLM Well Information System
For EOG RESOURCES INC, sent to the Vernal
Committed to AFMSS for processing by CINDY SEVERSON on 09/18/2007 (07CX8026AG), GAS & MINING

RECEIVED

AUG 05 2008

CONDITIONS OF APPROVAL ATTACHED

NOTICE OF APPROVAL

** BLM REVISED **

MDG/M

NOS 01/26/2007

07PP1311A



**UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE**

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: EOG Resources Inc.
Well No: East Chapita 23-09
API No: 43-047-39637

Location: SESW, Sec. 9, T9S, R23E
Lease No: UTU-67868
Agreement: N/A

Title	Name	Office Phone Number	Cell Phone Number
Petroleum Engineer:	Matt Baker	(435) 781-4490	(435) 828-4470
Petroleum Engineer:	Michael Lee	(435) 781-4432	(435) 828-7875
Petroleum Engineer:	James Ashley	(435) 781-4470	(435) 828-7874
Petroleum Engineer:	Ryan Angus	(435) 781-4430	(435) 828-7368
Supervisory Petroleum Technician:	Jamie Sparger	(435) 781-4502	(435) 828-3913
Supervisory NRS:	Karl Wright	(435) 781-4484	(435) 828-7381
NRS/Enviro Scientist:	Holly Villa	(435) 781-4404	(435) 828-3544
NRS/Enviro Scientist:	James Hereford	(435) 781-3412	
NRS/Enviro Scientist:	Chuck Macdonald	(435) 781-4441	(435) 828-7481
NRS/Enviro Scientist:	Dan Emmett	(435) 781-3414	
NRS/Enviro Scientist:	Paul Percival	(435) 781-4493	
NRS/Enviro Scientist:	Michael Cutler	(435) 781-3401	(435) 828-3546
NRS/Enviro Scientist:	Anna Figueroa	(435) 781-3407	(435) 828-3548
NRS/Enviro Scientist:	Verlyn Pindell	(435) 781-3402	(435) 828-3547
NRS/Enviro Scientist:	Darren Williams	(435) 781-4447	(435) 828-4029
NRS/Enviro Scientist:	Nathan Packer	(435) 781-3405	(435) 828-3545

Fax: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Location Construction (Notify Environmental Scientist)	- Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	- Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	- Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to running casing and cementing all casing strings.
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	- Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

Site Specific Conditions of Approval

- If paleontological materials are uncovered during construction, the operator is to immediately stop work, and contact the Authorized Officer (AO). A report will be prepared by the Paleontologist and submitted to the BLM at the completion of surface disturbing activities.
- Bury pipeline at all low water crossings.
- Permission from an authorized BLM representative would be required if construction or other operations occur during wet conditions that would lead to excessive rutting.
- Permission to clear all wildlife stipulations would only be approved by the BLM wildlife biologist during the specific timing for the species potentially affected by this action.
- Culverts and gravel may be installed as needed.
- The proposed access road will enter the location from the west heading upstream against the flow of water from the wash to prevent water flow and accumulation onto the pad.
- The pipeline crossing the 100-year floodplain will be engineered and buried according to the Hydraulic Considerations for Pipelines Crossing Stream Channels (BLM Technical Note 423, April 2007).
- The well will be drilled utilizing a closed-loop drilling system.
- No construction, drilling or fracing from may 15 to June 20 in order to protect pronghorn habitat.

**DOWNHOLE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

SITE SPECIFIC DOWNHOLE COAs:

- The conductor pipe shall be set and cemented in a competent formation.
- The top of the production casing cement shall extend a minimum of 200 feet above the surface casing shoe
- A 75 foot long blooie line is approved. All other equipment for air/gas drilling shall meet specifications in Onshore Order #2, III. Requirements, E. Special Drilling Operations.
- Logging program: Gamma Ray shall be run from TD to surface.
- At the 9 5/8" casing shoe, a casing shoe formation integrity test shall be performed after drilling 20 feet or less, past the casing shoe.

Commingling:

- Downhole commingling for the Wasatch-Mesaverde formations is approved. This approval can be rescinded at any time the Authorized Officer determines the commingling to be detrimental to the interest of the United States.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.

- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location ($\frac{1}{4}$ $\frac{1}{4}$, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or

data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: EOG RESOURCES Operator Account Number: N 9550
 Address: 1060 East Highway 40
city VERNAL
state UT zip 84078 Phone Number: (435) 781-9145

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
43-047-39637	EAST CHAPITA 23-09		SESW	9	9S	23E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
A	99999	17106	9/23/2008		9/30/08		
Comments: WASATCH/MESAVERD WELL PRRV = MVRD = WSMVD							

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
43-047-39636	EAST CHAPITA 22-09		SWSW	9	9S	23E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
A	99999	17107	9/21/2008		9/30/08		
Comments: WASATCH/MESAVERDE WELL PRRV = MVRD = WSMVD							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
43-047-39940	CHAPITA WELLS UNIT 748-07		NESE	7	9S	23E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
A	99999	17108	9/23/2008		9/30/08		
Comments: WASATCH WELL							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Mickenzie Thacker

Name (Please Print)

Mickenzie Thacker

Signature

Operations Clerk

9/25/2008

Title

Date

RECEIVED

SEP 25 2008

(5/2000)

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU67868

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
EAST CHAPITA 23-09

9. API Well No.
43-047-39637

10. Field and Pool, or Exploratory
NATURAL BUTTES

11. County or Parish, and State
UINTAH COUNTY, UT

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
EOG RESOURCES, INC. Contact: MICKENZIE THACKER
E-Mail: MICKENZIE_THACKER@EOGRESOURCES.COM

3a. Address
1060 E. HWY 40
VERNAL, UT 84078

3b. Phone No. (include area code)
Ph: 435-781-9145

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 9 T9S R23E SESW 470FSL 2150FWL
40.04449 N Lat, 109.33368 W Lon

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other Well Spud
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

The referenced well was spud on 9/23/2008.

14. I hereby certify that the foregoing is true and correct.
Electronic Submission #63357 verified by the BLM Well Information System For EOG RESOURCES, INC., sent to the Vernal

Name (Printed/Typed) MICKENZIE THACKER Title OPERATIONS CLERK

Signature *Mickenzie Thacker* Date 09/25/2008

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED**

RECEIVED

SEP 29 2008

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU67868

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

8. Well Name and No.
EAST CHAPITA 23-09

9. API Well No.
43-047-39637

10. Field and Pool, or Exploratory
NATURAL BUTTES

11. County or Parish, and State
UINTAH COUNTY, UT

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
EOG RESOURCES, INC. Contact: MICKENZIE THACKER
E-Mail: MICKENZIE_THACKER@EOGRESOURCES.COM

3a. Address
1060 E. HWY 40
VERNAL, UT 84078

3b. Phone No. (include area code)
Ph: 435-781-9145

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 9 T9S R23E SESW 470FSL 2150FWL
40.04449 N Lat, 109.33368 W Lon

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

1. Trip in hole with drill pipe to top of fish @ 2130' Pump 100' cement plug from 2130' to 2030'. Lay down drill pipe.
2. Run 1" pipe to 100' Circulate hole full of cement from 100' to surface.
3. Cut off 14" conductor pipe 3' below G.L. and install marker plate as per BLM regulations.

Accepted by the
Utah Division of
Oil, Gas and Mining
For Record Only
Already plugged

14. I hereby certify that the foregoing is true and correct.
Electronic Submission #64583 verified by the BLM Well Information System For EOG RESOURCES, INC., sent to the Vernal

Name (Printed/Typed) MICKENZIE THACKER Title OPERATIONS CLERK

Signature *Mickenzie Thacker* Date 11/10/2008

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED**

RECEIVED

NOV 17 2008

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
UTU67868

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
EAST CHAPITA 23-09

9. API Well No.
43-047-39637

10. Field and Pool, or Exploratory
NATURAL BUTTES

11. County or Parish, and State
UINTAH COUNTY, UT

1. Type of Well
 Oil Well Gas Well Other: UNKNOWN OTH

2. Name of Operator
EOG RESOURCES, INC. Contact: MICKENZIE THACKER
E-Mail: MICKENZIE_THACKER@EOGRESOURCES.COM

3a. Address
1060 E. HWY 40
VERNAL, UT 84078

3b. Phone No. (include area code)
Ph: 435-781-9145

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 9 T9S R23E SESW 470FSL 2150FWL
40.04449 N Lat, 109.33368 W Lon

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. Plugged and Abandoned the referenced well as per the attached well chronology report.

14. I hereby certify that the foregoing is true and correct.
**Electronic Submission #64972 verified by the BLM Well Information System
For EOG RESOURCES, INC., sent to the Vernal**

Name (Printed/Typed) MICKENZIE THACKER Title OPERATIONS CLERK

Signature *Mickenzie Thacker* (Electronic Submission) Date 11/21/2008

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____ Title _____ Date _____

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****

RECEIVED

NOV 24 2008

DIV. OF OIL, GAS & MINING

WELL CHRONOLOGY REPORT

Report Generated On: 11-20-2008

Well Name	ECW 023-09	Well Type	DEVG	Division	DENVER
Field	CHAPITA DEEP	API #	43-047-39637	Well Class	DRIL
County, State	UINTAH, UT	Spud Date		Class Date	
Tax Credit	N	TVD / MD	9,150/ 9,150	Property #	057862
Water Depth	0	Last CSG	0.0	Shoe TVD / MD	0/ 0
KB / GL Elev	4,914/ 4,903				
Location	Section 9, T9S, R23E, SESW, 470 FSL & 2150 FWL				

Event No	1.0	Description	DRILL & COMPLETE		
Operator	EOG RESOURCES, INC	WI %	100.0	NRI %	87.5

AFE No	303713	AFE Total	2,049,300	DHC / CWC	912,100/ 1,137,200
Rig Contr	TRUE	Rig Name	TRUE #26	Start Date	09-21-2007
09-21-2007	Reported By	SHARON CAUDILL			
Daily Costs: Drilling	\$0	Completion	\$0	Daily Total	\$0
Cum Costs: Drilling	\$0	Completion	\$0	Well Total	\$0
MD	0	TVD	0	Progress	0
		Days	0	MW	0.0
		Visc			0.0
Formation :	PBTD : 0.0		Perf :	PKR Depth : 0.0	

Activity at Report Time: LOCATION DATA

Start	End	Hrs	Activity Description
-------	-----	-----	----------------------

06:00	06:00	24.0	LOCATION DATA
			470' FSL & 2150' FWL (SE/SW)
			SECTION 9, T9S, R23E
			UINTAH COUNTY, UTAH

LAT 40.044494, LONG 109.333683 (NAD 83)
LAT 40.044528, LONG 109.333003 (NAD 27)

TRUE #26
OBJECTIVE: 9150' TD, MESAVERDE
DW/GAS
EAST CHAPITA PROSPECT
DD&A: CHAPITA DEEP
NATURAL BUTTES FIELD

LEASE: UTU-67868
ELEVATION: 4903.6' NAT GL, 4903.4' PREP GL, (DUE TO ROUNDING THE PREP GL IS 4903'), 4916' KB (13')

EOG WI 100%, NRI 87.5%

09-11-2008 Reported By TERRY CSERE

DailyCosts: Drilling \$75,000 **Completion** \$0 **Daily Total** \$75,000
Cum Costs: Drilling \$75,000 **Completion** \$0 **Well Total** \$75,000
MD 0 **TVD** 0 **Progress** 0 **Days** 0 **MW** 0.0 **Visc** 0.0
Formation : **PBTD : 0.0** **Perf :** **PKR Depth : 0.0**

Activity at Report Time: BUILD LOCATION

Start	End	Hrs	Activity Description
06:00	06:00	24.0	CONSTRUCTION OF LOCATION STARTED TODAY.

09-12-2008 Reported By TERRY CSERE

DailyCosts: Drilling \$0 **Completion** \$0 **Daily Total** \$0
Cum Costs: Drilling \$75,000 **Completion** \$0 **Well Total** \$75,000
MD 0 **TVD** 0 **Progress** 0 **Days** 0 **MW** 0.0 **Visc** 0.0
Formation : **PBTD : 0.0** **Perf :** **PKR Depth : 0.0**

Activity at Report Time: BUILD LOCATION

Start	End	Hrs	Activity Description
06:00	06:00	24.0	PUSHING ON ROAD.

09-15-2008 Reported By TERRY CSERE

DailyCosts: Drilling \$0 **Completion** \$0 **Daily Total** \$0
Cum Costs: Drilling \$75,000 **Completion** \$0 **Well Total** \$75,000
MD 0 **TVD** 0 **Progress** 0 **Days** 0 **MW** 0.0 **Visc** 0.0
Formation : **PBTD : 0.0** **Perf :** **PKR Depth : 0.0**

Activity at Report Time: BUILD LOCATION

Start	End	Hrs	Activity Description
06:00	06:00	24.0	LOCATION 40% COMPLETE.

09-16-2008 Reported By TERRY CSERE

DailyCosts: Drilling \$0 **Completion** \$0 **Daily Total** \$0
Cum Costs: Drilling \$75,000 **Completion** \$0 **Well Total** \$75,000
MD 0 **TVD** 0 **Progress** 0 **Days** 0 **MW** 0.0 **Visc** 0.0
Formation : **PBTD : 0.0** **Perf :** **PKR Depth : 0.0**

Activity at Report Time: LOCATION COMPLETE - START CLOSED LOOP SYSTEM

Start	End	Hrs	Activity Description
06:00	06:00	24.0	LOCATION COMPLETE. START CLOSED LOOP SYSTEM.

09-17-2008 Reported By TERRY CSERE

DailyCosts: Drilling \$0 **Completion** \$0 **Daily Total** \$0
Cum Costs: Drilling \$75,000 **Completion** \$0 **Well Total** \$75,000
MD 0 **TVD** 0 **Progress** 0 **Days** 0 **MW** 0.0 **Visc** 0.0
Formation : **PBTD : 0.0** **Perf :** **PKR Depth : 0.0**

Activity at Report Time: BUILD LOCATION

Start	End	Hrs	Activity Description
06:00	06:00	24.0	BUILDING CLOSED LOOP SYSTEM.

09-18-2008 Reported By TERRY CSERE

06:00 06:00 24.0 MIRU CRAIGS AIR RIG # 4 ON 11-9-2008. DRILLED 12 1/4" HOLE TO 2350' GL WITH CLOSED LOOP SYSTEM. THE DRILL STRING TWISTED OFF LEAVING THE BIT, THREE 8" DRILL COLLARS, CROSS OVER SUB, AND FOUR 6" DRILL COLLARS IN THE HOLE. AFTER SEVERAL UNSUCCESSFUL FISHING TRIPS THE OVERSHOT CAME OUT OF HOLE MISSING THE SKIRT AND CONTROL.

P&A

11/13/2008

MIRU CRAIGS RIG # 4. RAN IN HOLE WITH DRILL PIPE TO 2130'. MIRU HALLIBURTON CEMENTERS.

PLUG # 1: 2130' TO 2030'. PUMPED 100 BBLS FRESH WATER AHEAD. NO CIRCULATION. MIXED & PUMPED 100 SX (20.5 BBLS) OF PREMIUM CEMENT W/ 2% CACL2. DISPLACED CEMENT W/20.5 BBLS FRESH WATER. LAID DOWN 15 JOINTS DRILL PIPE TO 1680'. WOC 7 HRS.

11/14/2008

TRIPPED IN HOLE AND TAGGED CEMENT AT 2070'. MIXED AND PUMPED 50 SX (10.2 BBLS) OF PREMIUM CEMENT W/ 2% CACL2. DISPLACED CEMENT WITH 20.5 BBLS FRESH WATER. LAID DOWN 16 JOINTS DRILL PIPE TO 1590'.

PLUG # 2: 1590 TO 1380'. PUMPED 20 BBLS FRESH WATER AHEAD. MIXED & PUMPED 150 SX (30.7 BBLS) OF PREMIUM CEMENT W/2% CACL2. DISPLACED CEMENT W/ 15 BBLS FRESH WATER. LAID DOWN DRILL PIPE. WOC 9 HRS. TRIPPED IN HOLE TO 1590'. NO TAG. MIXED & PUMPED 150 SX (30.7 BBLS) OF PREMIUM CEMENT W/2% CACL2. DISPLACED CEMENT W/15 BBLS FRESH WATER. LAID DOWN DRILL PIPE. WOC 6 HRS. TRIP IN HOLE AND TAGGED CEMENT AT 1425'. MIXED AND PUMPED 50 SX (10.2 BBLS) OF PREMIUM CEMENT W/2% CACL2. DISPLACED CEMENT W/13 BBLS FRESH WATER. LAID DOWN DRILL PIPE. RAN 100' OF 1" PIPE IN HOLE. RDMO CRAIGS RIG 4.

PLUG # 3: 100' TO SURFACE. MIXED AND PUMPED 100 SX (20.5 BBLS) OF PREMIUM CEMENT W/2% CACL2. NO RETURNS. WOC 4 HRS. RAN IN HOLE W/ MEASURE LINE. FOUND CEMENT AT 70'. RAN 70' OF 1' PIPE. MIXED AND PUMPED 100 SX (20.5 BBLS) OF PREMIUM CEMENT W/2% CACL2. NO RETURNS. WOC 4 HRS 30 MINUTES. RAN IN HOLE W/ MEASURE LINE. FOUND CEMENT AT 50'. RAN 1" PIPE TO 50'. MIXED & PUMPED 50 SX (10.2 BBLS) OF PREMIUM CEMENT W/2% CACL2. HOLE FILLED W/ CEMENT & STOOD FULL. RDMO HALLIBURTON CEMENTERS.

11/15/2008

DIG OUT CELLAR AND CUT OFF CONDUCTOR 3' BELOW G.L. INSTALL MARKER PLATE AS PER REGULATIONS.

THIS ENTIRE JOB WAS WITNESSED BY JOHNNY BOWEN & JAKE BIRCHELL, VBLM INSPECTORS.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5. Lease Serial No.
UTU67868

1a. Type of Well Oil Well Gas Well Dry Other: OTH
b. Type of Completion New Well Work Over Deepen Plug Back Diff. Resvr.
Other _____

6. If Indian, Allottee or Tribe Name

7. Unit or CA Agreement Name and No.

2. Name of Operator
EOG RESOURCES, INC. Contact: MICKENZIE THACKER
E-Mail: MICKENZIE_THACKER@EOGRESOURCES.COM

8. Lease Name and Well No.
EAST CHAPITA 23-09

3. Address 1060 E. HWY 40
VERNAL, UT 84078 3a. Phone No. (include area code)
Ph: 435-781-9145

9. API Well No.
43-047-39637

4. Location of Well (Report location clearly and in accordance with Federal requirements)*
At surface SESW 470FSL 2150FWL 40.04449 N Lat, 109.33368 W Lon
At top prod interval reported below SESW 470FSL 2150FWL 40.04449 N Lat, 109.33368 W Lon
At total depth SESW 470FSL 2150FWL 40.04449 N Lat, 109.33368 W Lon

10. Field and Pool, or Exploratory
NATURAL BUTTES

11. Sec., T., R., M., or Block and Survey
or Area Sec 9 T9S R23E Mer SLB

12. County or Parish
UINTAH 13. State
UT

14. Date Spudded
09/23/2008 15. Date T.D. Reached
11/09/2008 16. Date Completed
 D & A Ready to Prod.
11/13/2008

17. Elevations (DF, KB, RT, GL)*
4904 GL

18. Total Depth: MD
TVD 2350 19. Plug Back T.D.: MD
TVD \emptyset 20. Depth Bridge Plug Set: MD
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
22. Was well cored? No Yes (Submit analysis)
Was DST run? No Yes (Submit analysis)
Directional Survey? No Yes (Submit analysis)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
20.000	14.000		0	48					
12.250	9.625		0	2350					

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)

25. Producing Intervals

26. Perforation Record

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A)						
B)						
C)						
D)						

27. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Depth Interval	Amount and Type of Material

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
			→						P&A

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
			→						

(See Instructions and spaces for additional data on reverse side)

ELECTRONIC SUBMISSION #64971 VERIFIED BY THE BLM WELL INFORMATION SYSTEM

** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED **

RECEIVED

NOV 24 2008

DIV. OF OIL, GAS & MINING

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

29. Disposition of Gas (Sold, used for fuel, vented, etc.)
UNKNOWN

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth

32. Additional remarks (include plugging procedure):
EOG Resources, Inc. Plugged and Abandoned the referenced well as per the attached well chronology report.


33. Circle enclosed attachments:

- 1. Electrical/Mechanical Logs (1 full set req'd.)
- 2. Geologic Report
- 3. DST Report
- 4. Directional Survey
- 5. Sundry Notice for plugging and cement verification
- 6. Core Analysis
- 7. Other:

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions):

**Electronic Submission #64971 Verified by the BLM Well Information System.
For EOG RESOURCES, INC., sent to the Vernal**

Name (please print) MICKENZIE THACKER Title OPERATIONS CLERK

Signature  Date 11/21/2008

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ** ORIGINAL ****