



Enduring Resources

475 17th Street Suite 1500 Denver Colorado 80202
Telephone 303 573-1222 Fax 303 573 0461

October 26, 2007

Utah Division of Oil, Gas and Mining
1594 West North Temple, Suite 1210
P. O. Box 145801
Salt Lake City, Utah 84114-5801

Attn.: Ms. Diana Mason

RE: **Hanging Rock 11-23-44-35**
Surface Location: SESE Sec. 35-11S-23E
644' FSL – 831' FEL
Lease Serial No.: UTU-73694
Uintah County, Utah

Dear Ms. Mason:

Enclosed is one original application to drill concerning the above-referenced proposed well.

Enduring Resources, LLC is requesting the Utah Division of Oil, Gas and Mining to hold this application and all future information as confidential.

If any questions arise or additional information is required, please contact me at 303-350-5719.

Very truly yours,

ENDURING RESOURCES, LLC

Alvin R. (Al) Arlian
Landman - Regulatory

Enclosures as stated:

RECEIVED
OCT 31 2007
DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT
(highlight changes)

APPLICATION FOR PERMIT TO DRILL			5. MINERAL LEASE NO: UTU-73694	6. SURFACE: Federal
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>			7. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>			8. UNIT or CA AGREEMENT NAME:	
2. NAME OF OPERATOR: Enduring Resources, LLC			9. WELL NAME and NUMBER: Hanging Rock 11-23-44-35	
3. ADDRESS OF OPERATOR: 475 17th St., Ste 1500 CITY Denver STATE CO ZIP 80220		PHONE NUMBER: (303) 350-5114	10. FIELD AND POOL, OR WILDCAT: Undesignated <i>J & S Springs</i> 635	
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: SESE 644' FSL - 831' FEL AT PROPOSED PRODUCING ZONE: Same			11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 35 11S 23E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 67.0 miles Southeast of Vernal, UT			12. COUNTY: Uintah	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) <i>200' 644'</i>	16. NUMBER OF ACRES IN LEASE: 640	17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 40 acres		
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) 1000' +	19. PROPOSED DEPTH: 4,690	20. BOND DESCRIPTION: RLB0008031		
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 5902' RT-KB	22. APPROXIMATE DATE WORK WILL START: 6/15/2008	23. ESTIMATED DURATION: 20 days		

24. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT	SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT			
20"	14" line pipe	40	3 yards	Ready Mix		
11"	8-5/8" J-55 24#	2,016	Premium Lead	138 sxs	3.50	11.1
			Premium Tail	138 sxs	1.15	15.8
7-7/8"	4-1/2" N-80 11.6#	4,690	Class G	49 sxs	3.3	11.0
			50/50 Poz Class G	443 sxs	1.56	14.3

25. ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:

<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER	<input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER


NAME (PLEASE PRINT) Alvin R. (Al) Arlian TITLE Landman - Regulatory Specialist

SIGNATURE  DATE 10/26/2007

(This space for State use only)

**Approved by the
Utah Division of
Oil, Gas and Mining**

APPROVAL:

Date: 11-01-07
(See Instructions on Reverse Side)
By: 

RECEIVED

OCT 31 2007

DIV. OF OIL, GAS & MINING

API NUMBER ASSIGNED: 43-047-39748

(11/2001)

**Federal Approval of this
Action is Necessary**

T11S, R23E, S.L.B.&M.

S89°53'W - 80.12 (G.L.O.)

S89°51'28"W - 2637.56' (Meas.)

ENDURING RESOURCES

WELL LOCATION, HANGING ROCK
11-23-44-35, LOCATED AS SHOWN IN
THE SE 1/4 SE 1/4 OF SECTION 35,
T11S, R23E, S.L.B.&M. UINTAH COUNTY,
UTAH.




SCALE



NOTES:

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.


THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

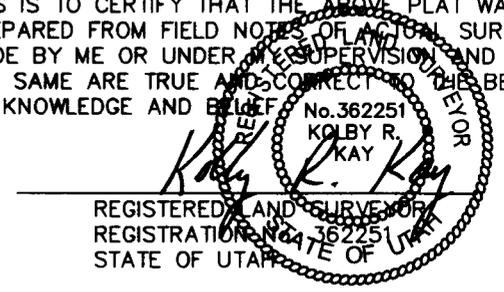

REGISTERED LAND SURVEYOR
REGISTRATION NO. 362251
STATE OF UTAH

TIMBERLINE (435) 789-1365
ENGINEERING & LAND SURVEYING, INC.
38 WEST 100 NORTH - VERNAL, UTAH 84078

DATE SURVEYED: 06-06-07	SURVEYED BY: M.S.B.	SHEET 2 OF 10
DATE DRAWN: 06-07-07	DRAWN BY: M.W.W.	
SCALE: 1" = 1000'		Date Last Revised:

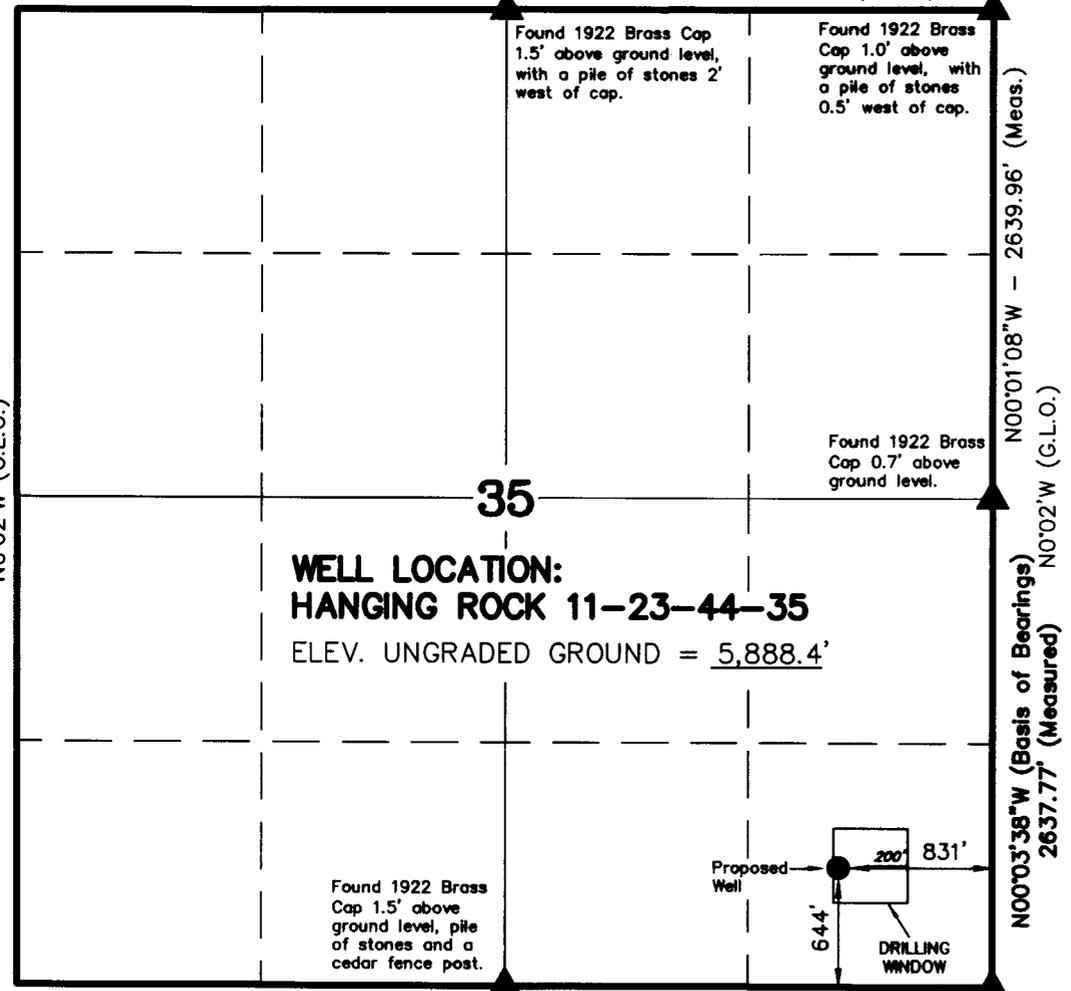

▲ = SECTION CORNERS LOCATED
BASIS OF ELEVATION IS BENCH MARK 87 EAM 1965
LOCATED IN THE SE 1/4 SW 1/4 OF SECTION 1,
T12S, R23E, S.L.B.&M. THE ELEVATION OF THIS
BENCH MARK IS SHOWN ON THE ARCHY BENCH SE
7.5 MIN. QUADRANGLE AS BEING 5887'.

HANGING ROCK 11-23-44-35
(Proposed Well Head)
NAD 83 Autonomous
LATITUDE = 39° 48' 41.34"
LONGITUDE = 109° 18' 14.52"



Enduring Resources

475 17th Street Suite 1500 Denver Colorado 80202
Telephone 303 573-1222 Fax 303 573 0461

October 26, 2007

Bureau of Land Management
Vernal Field Office
170 South 500 East
Vernal, Utah 84078

Attention: Jannice Cutler

RE: Hanging Rock 11-23-44-35
Surface Location: SESE Sec. 35-11S-23E
644' FSL – 831' FEL
Lease Serial No.: UTU-73694
Uintah County, Utah

Dear Ms. Culter:

Enclosed are three original applications to drill concerning the above-referenced proposed well. This information was also submitted to the State of Utah - Division of Oil, Gas, and Mining.

Enduring Resources, LLC is requesting this application and all future information be held as confidential as long as permitted.

If any questions arise or additional information is required, please contact me at 303-350-5719.

Very truly yours,

ENDURING RESOURCES, LLC


Alvin R. (Al) Arlian
Landman - Regulatory

Enclosures as stated:

**Enduring Resources, LLC
Hanging Rock 11-23-44-35
SESE 35-11S-23E
Uintah County, Utah
Federal Lease: UTU-73694**

ONSHORE ORDER 1 - DRILLING PLAN

1. Estimated Tops of Geological Markers:

Formation	Depth (K.B.)
Uinta	Surface
Green River	312
Wasatch	2662
Mesaverde	4187

2. Estimated Depths of Anticipated Water, Oil, Gas or Other Minerals:

Substance	Formation	Depth (K.B.)
	KB-Uinta Elevation: 5902'	
Oil / Gas	Green River	312
Oil /Gas	Wasatch	2662
Oil /Gas	Mesaverde	4187
	Estimated TD	4690

An 11" hole will be drilled to approximately 2016 feet. The depth will be determined by the depth that the Birds Nest zone is encountered. The hole will be drilled 400 feet beyond the top of the Birds Nest zone and surface casing will be set.

3. Pressure Control Equipment: (3000 psi schematic attached)

- A. Type: Eleven (11) inch double gate hydraulic BOP with eleven (11) inch annular preventer on 3,000 psi casinghead, with 3,000 psi choke manifold equipped per the attached diagram. BOPE as specified in *Onshore Oil & Gas Order Number 2*. A PVT, stroke counter and flow sensor will be installed to check for flow and monitor pit volume.
- B. Pressure Rating: 3,000 psi BOPE
- C. Kelly will be equipped with upper and lower Kelly valves.
- D. Testing Procedure: Annular Preventer

At a minimum, the annular preventer will be pressure tested to 50% of the stack rated working pressure for a period of ten (10) minutes or until provisions of the test are met, whichever is longer.

At a minimum, the above pressure test will be performed:

1. When the annular preventer is initially installed;
2. Whenever any seal subject to test pressure is broken;
3. Following related repairs; and
4. At thirty (30) day intervals.

In addition to the above, the annular preventer will be functionally operated at least weekly.

Blow-Out Preventer

At a minimum, the BOP, choke manifold, and related equipment will be pressure tested to the approved working pressure of the BOP stack (if isolated from the surface casing by a test plug) or to 70% of the internal yield strength of the surface casing (if the BOP is not isolated from the casing by a test plug). Pressure will be maintained for a period of at least ten (10) minutes or until the requirements of the test are met, whichever is longer.

At a minimum, the above pressure test will be performed:

1. When the BOP is initially installed;
2. Whenever any seal subject to test pressure is broken;
3. Following related repairs; and
4. At thirty (30) day intervals.

In addition to the above, the pipe and blind rams will be activated each trip, but not more than once each day. All BOP drills and tests will be recorded in the IADC driller's log.

E. Miscellaneous Information:

The blowout preventer and related pressure control equipment will be installed, tested and maintained in compliance with the specifications in and requirements of *Onshore Oil & Gas Order Number 2*.

4. Proposed Casing & Cementing Program:

A. Casing Program: All New

Hole Size	Casing Size	Wt./Ft.	Grade	Joint	Depth Set (MD)
20"	14" O.D.				40' (GL)
11"	8-5/8"	24#	J-55	ST&C	0 – 2,016' (KB) est.
7-7/8"	4-1/2"	11.6#	N-80	LT&C	0 – 4690' (KB)

The surface casing will have guide shoe. Centralize the shoe joint with bowspring centralizers in the middle and top of the joint and the next 16 joints with bowspring

centralizers on every other collar (8 centralizers total). Thread lock guide shoe.

Casing string(s) will be pressure tested to 0.22 psi/foot of casing string length or 1500 psi, whichever is greater (not to exceed 70% of the internal yield strength of the casing), after cementing and prior to drilling out from under the casing shoe.

B. Casing Design Parameters:

Depth (MD)	Casing	Collapse(psi)/SF	Burst (psi)/SF	Tension(mlbs)/SF
40' (GL)	14" OD			
2016' (KB)	8-5/8", 24#/ft, J55, STC	1370/1.52(a)	2950/3.28(b)	244/5.81(c)
4690' (KB)	4-1/2", 11.6#/ft, N-80, LTC	6350/2.61(d)	7780/3.47 (e)	223/4.77(f)

- (a.) based on full evacuation of pipe with 8.6 ppg fluid on annulus
- (b.) based on 8.6 ppg gradient with no fluid on annulus
- (c.) based on casing string weight in 8.6 ppg mud
- (d.) based on full evacuation of pipe with 10.0 ppg fluid on annulus
- (e.) based on 9.2 ppg gradient, gas to surface, with no fluid on annulus, no gas gradient
- (f.) based on casing string weight in 9.2 ppg mud

PROPOSED CEMENTING PROGRAM

Surface Casing (if well will circulate)-Cemented to surface

CASING	SLURRY	FT. of FILL	CEMENT TYPE	SXS	EXCESS (%)	WEIGHT (ppg)	YIELD (ft ³ /sx)
8-5/8"	Lead	1516	Premium cement + 16% gel + 0.25 pps celloflake	138	25%	11.1	3.50
8-5/8"	Tail	500	Premium cement + 2% CaCl ₂ + 0.25 pps celloflake	138	25%	15.8	1.15

A cement top job is required if cement fallback is greater than 10' below ground level. Top job (weight 15.8 ppg, yield 1.15 ft³/sx) cement will be premium cement w/ 3% CaCl₂.+0.25 pps celloflake. Volume as required

Surface Casing (if well will not circulate) - Cemented to surface

CASING	SLURRY	FT. of FILL	CEMENT TYPE	SXS	EXCESS (%)	WEIGHT (ppg)	YIELD (ft ³ /sx)
8-5/8"	Lead	500	Premium cement + 2% CaCl ₂ + 0.25 pps celloflake	138	25	15.8	1.15
8-5/8"	Top job	As req.	Premium cement + 3% CaCl ₂ + 0.25 pps celloflake	As Req.		15.8	1.15

Production Casing and Liner - Cemented TD to 300' above base of surface casing

CASING	SLURRY	FT. of FILL	CEMENT TYPE	SXS	EXCESS (%)	WEIGHT (ppg)	YIELD (ft ³ /sx)
4-1/2"	Lead	546	Class "G" + 5% NaCl + 12% Gel + 0.25 pps celloflake + 0.2% antifoam + 0.25% fluid loss + 1% extender	49	25	11.0	3.3
4-1/2"	Tail	2428	50/50 POZ Class G + 2% gel +1% CaCl ₂ + 0.2% dispersant + 0.2% fluid loss + 0.1% antifoam	443	25	14.3	1.56

Cement volumes for the 4-1/2" Production Casing will be calculated to provide a top of cement to 300' above base of surface casing. Cement volumes are approximate and were calculated under the assumption that a gauge hole will be achieved. Actual cement volumes may vary due to variations in the actual hole size and will be determined by running a caliper log on the drilled hole. Actual cement types may vary due to hole conditions and cement contractor used.

All waiting on cement (WOC) times will be adequate to achieve a minimum of 500 psi compressive strength at the casing shoe prior to drilling out.

5. Drilling Fluids (mud) Program:

Interval (MD)	Mud Weight	Fluid Loss	Viscosity	Mud Type
0' - 2016' (KB)		No cntrl		Air/mist
2000'-3000' (KB)	8.4-8.6	No cntrl	28-36	Water
3000'-4690' (KB)	8.8-9.8	8 - 10 ml	32-42	Water/Gel

Sufficient mud material(s) to maintain mud properties, control lost circulation and contain a blowout will be available at the well site during drilling operations.

6. Evaluation Program:

Tests: No tests are currently planned.

Coring: No cores are currently planned.

Samples: No sampling is currently planned.

Logging

- Dual Induction – SFL /Gamma Ray/Caliper/SP/TDLT/CNL/ML
TD to Base Surface Casing
- Cement Bond Log / Gamma Ray:
TD to Base of Surface Casing or Top of Cement if below Base of Surface Casing

Stimulation: A stimulation or frac treatment will be designed for completion of this well based on openhole log analysis. The drill site, as approved, will be sufficient size to accommodate all completion activities.

7. **Abnormal Conditions:**

No abnormal temperatures or pressures are anticipated. No H₂S has been encountered or known to exist from previous wells drilled to similar depths in the general area.

Maximum anticipated bottom hole pressure equals approximately 2439 psi (calculated at 0.52psi/foot of hole) and maximum anticipated surface pressure equals approximately 1407 psi (anticipated bottom hole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot of hole).

8. **Anticipated Starting Dates:**

- Anticipated Commencement Date- Within one year of APD issue.
- Drilling Days- Approximately 10 days
- Completion Days - Approximately 10 days
- Anticipate location construction within 30 days of permit issue.

9. **Variances:**


None anticipated

10. **Other:**


A Cultural Resource Inventory and Paleontology reconnaissance shall be conducted for the well location, access route and pipeline. The reports shall be submitted to the Division of Oil, Gas and Mining and the School and Institutional Trust lands Administration upon their receipt.

Single Shot directional surveys will be dropped every 2000 feet to monitor hole angle.

TYPICAL 3,000 p.s.i.
BLOWOUT PREVENTER SCHEMATIC

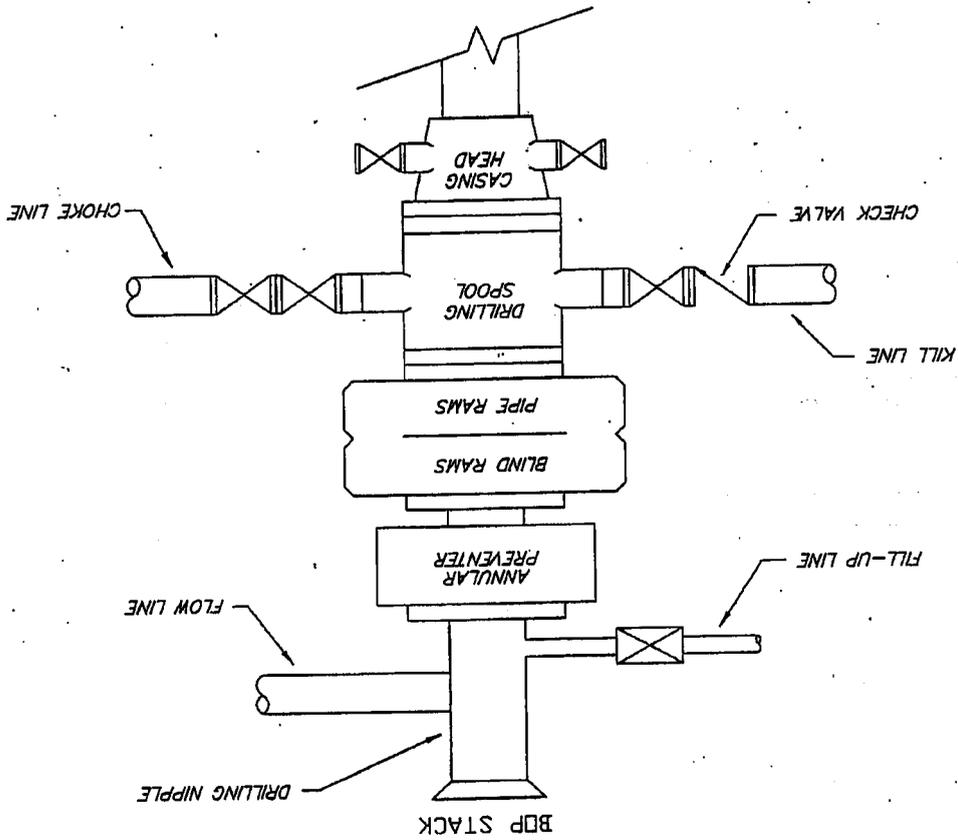

TYPICAL 3,000 p.s.i.
CHOKING MANIFOLD SCHEMATIC

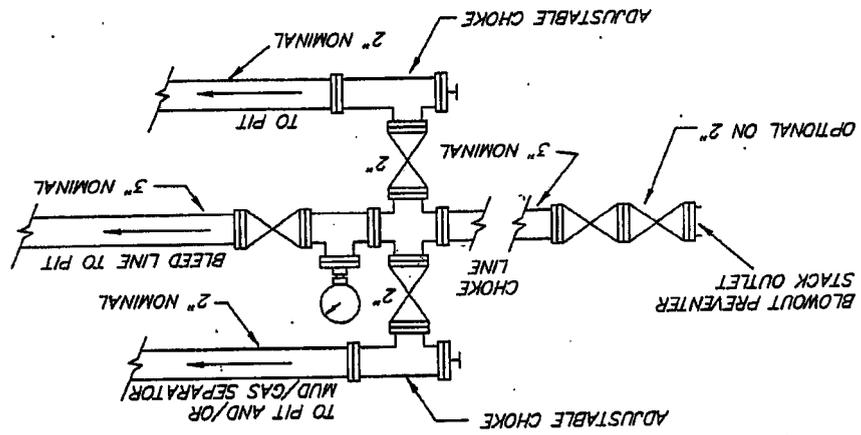

Enduring Resources, LLC
Hanging Rock 11-23-44-35
SESE 35-11S-23E
Uintah County, Utah

Federal Lease: UTU-73694

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. Existing Roads:

FROM THE INTERSECTION OF U.S. HIGHWAY 40 AND 500 EAST STREET IN VERNAL, UTAH PROCEED IN AN EASTERLY THEN SOUTHERLY DIRECTION ALONG U.S. HIGHWAY 40 APPROXIMATELY 3.3 MILES TO THE JUNCTION OF STATE HIGHWAY 45; EXIT RIGHT AND PROCEED IN A SOUTHERLY DIRECTION ALONG STATE HIGHWAY 45 APPROXIMATELY 40.5 MILES TO THE JUNCTION OF THE DRAGON ROAD (COUNTY B ROAD 4180). THIS ROAD IS LOCATED APPROXIMATELY 4.5 MILES SOUTH OF BONANZA, UTAH. EXIT LEFT AND PROCEED IN A SOUTHEASTERLY DIRECTION ALONG COUNTY B ROAD 4180 APPROXIMATELY 4.0 MILES TO THE JUNCTION OF THE KINGS WELLS ROAD (COUNTY B ROAD 4190). EXIT RIGHT AND PROCEED IN A SOUTHWESTERLY DIRECTION ALONG COUNTY B ROAD 4190 APPROXIMATELY 8.7 MILES TO THE JUNCTION OF THE ATCHEE RIDGE ROAD (COUNTY B ROAD 4270). CONTINUE ALONG COUNTY B ROAD 4190 IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 4.3 MILES TO THE JUNCTION OF THE LONG DRAW ROAD (COUNTY B ROAD 4260). CONTINUE ALONG COUNTY B ROAD 4190 IN A SOUTHERLY, THEN WESTERLY DIRECTION APPROXIMATELY 4.0 MILES TO THE JUNCTION OF COUNTY B ROAD 4160. EXIT RIGHT AND PROCEED IN A NORTHERLY DIRECTION ALONG COUNTY B ROAD 4160 APPROXIMATELY 1.5 MILES TO THE PROPOSED ACCESS ROAD. FOLLOW ROAD FLAGS IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 2,240 FEET TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 66.7 MILES IN A SOUTHEASTERLY DIRECTION.

2. Planned Access Roads:

The proposed access road will be approximately 2,240 feet of new construction, of which 1,355 feet is on-lease and 885 feet is off-lease (SITLA r-o-w applied for and pending). Please refer to Topo Map "B" for the takeoff point for the new road construction.

The proposed access road will be utilized to transport personnel, equipment and supplies to and from the proposed well site during drilling, completion and production operations. The road will be utilized year round.

The access road will be crowned 2% to 3%, ditched and constructed with a running surface of 18 feet and a maximum disturbed width of 30 feet right-of-way. Maximum grade

of road is 5% or less. Graveling or capping the roadbed will be performed as necessary to provide a well constructed, safe road. No fence crossings, culverts, turnouts, cattle guards or major cuts and fills are required. Prior to construction or upgrading, the proposed road shall be cleared of any snow and allowed to dry completely.

Surface disturbance and vehicular traffic will be limited to the proposed location and proposed access route. Any additional area needed will be approved in advance. All construction shall be in conformance with the standards outlined in the BLM and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and

The road surface and shoulders will be kept in a safe usable condition and will be maintained in accordance with the original construction standards. All drainage ditches will be kept clear and free flowing and will be maintained according to original construction standards. The access road surface will be kept free of trash during operations. All traffic will be confined to the approved disturbed surface. Road drainage crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing nor shall the drainages be blocked by the road bed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided. When snow is removed from the road during the winter months, the snow shall be pushed outside of the borrow ditches and the turnouts kept clear so that snowmelt will be channeled away from the road.

3. Location of Existing Wells within a One-Mile radius (See "Topo" Map "C" attached):

The following wells are wells located within a one (1) mile radius of the proposed location.

- | | | |
|----|-------|---|
| a. | None: | Water Wells: |
| b. | None: | Injection Wells: |
| c. | None: | Producing Wells: |
| d. | One: | Drilling Wells: |
| | | 1. Hanging Rock 11-23-34-36 |
| e. | None: | Shut-in Wells: |
| f. | None: | Temporarily Abandoned Wells: |
| g. | None: | Disposal Wells: |
| h. | Five: | Abandoned Wells: |
| | | 1. There are Five abandoned wells. |
| i. | None: | Dry Holes: |
| j. | None: | Observation Wells: |
| k. | Six: | Pending (staked) Wells: |
| | | 1. Enduring seven other wells staked within one mile. |

4. Location of Existing and/or Proposed Facilities:

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain fluids (i.e. production tanks, produced water tanks and/or heater treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank and be independent of the back cut.

All permanent (on site for six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the rocky Mountain Five State Inter-Agency Committee

All facilities will be painted within 6 months of installation. The color shall be Dark Olive Black. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

Gas Gathering Pipeline:	ON-LEASE	1335'	BLM
	OFF-LEASE	860'	SITLA

If the well is capable of economic production, a surface gas gathering line and related equipment shall be installed for year around usage. Approximately 2,195 feet of 4" or less surface gas gathering pipeline shall be laid to minimize surface disturbance.

The proposed pipeline will begin at the well site, be laid on the north side of the access road and tie-in to an existing pipeline.

The meter run will be housed. The gas gathering line will be buried or anchored down from the wellhead to the meter.

Upon plugging and abandonment, the gas gathering line will be removed and the disturbed area will be re-contoured and restored as near as practical to the original condition. If necessary, re-seeding operations will be performed after completion of other reclamation operations.

5. Location and Type of Water Supply:

Whenever practical, water will be obtained from Enduring Resources LLC Water Right Number 49-2249 (*See Townships of permitted Use below). If those sources are not available, a new water source shall be submitted prior to commencing operations. (These permits have one-year terms and then must be renewed.)

*Enduring Water Permits' Townships of Use:

T10S-R22E	T11S-R22E	T12S-R22E
T10S-R23E	<u>T11S-R23E</u>	T12S-R23E
T10S-R24E	T11S-R24E	T12S-R24E

Water will be hauled to the location over the roads marked on "Topo" Maps "A" and "B."

No water well is to be drilled on this lease.

6. Source of Construction Materials:

Surface and subsoil materials in the immediate area will be utilized for location and access road construction.

Any gravel will be obtained from a commercial source; however, gravel sized rock debris associated with location and access road construction may be used as access road surfacing material.

7. Methods of Handling Waste Materials:

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, contained in the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break or allow discharge of liquids.

The reserve pit will be lined with ¼ felt and a minimum of 16 mm plastic with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

A chemical portable toilet will be furnished with the drilling rig. The toilet will be replaced periodically utilizing a licensed contractor to transport by truck the portable chemical toilet so that its contents can be delivered to the Vernal Wastewater Treatment Facility in accordance with state and county regulations.

Garbage, trash and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported or disposed of in association with the drilling, completion or testing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported or disposed of in association with the drilling, completion or testing of this well.

Produced oil will be stored in an oil tank and then hauled by truck to a crude purchaser facility. Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to an approved disposal site.

8. Ancillary Facilities:

During drilling operations, approximately 20 days, the site will be a manned camp. Three or four additional trailers will be on location to serve as the crews' housing and eating facilities. These will be located on the perimeter of the pad site within the topsoil stockpiles. Refer to Sheet 4.

9. Well Site Layout: (Refer to Sheets #2, #3, and #4)

The attached Location Layout Diagrams described drill pad cross-sections, cuts and fills and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s) and surface material stockpile(s).

Please see the attached diagram for rig orientation and access roads.

The top soil will be windrowed rather than piled. It will be reseeded and track walker at the time the location is constructed. Seeding will be with the determined during the onsite. (Refer to "Seed Mixture for Windrowed Top Soil Will included:" following herein.

The top soil removed from the pit area will be store separately and will not be reseeded until the pit is reclaimed.

All pits shall be fence to the following minimum standards:

- a. 39 inch net wire shall be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.
- b. The net wire shall be no more than 2 inches above the ground. The barbed wire shall be 3 inches over the new wire. Total height of the fence shall be at least 42 inches.
- c. Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.
- d. Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two fence posts shall be no greater than 16 feet.

- e. All wire shall be stretched by, using a stretching device, before it is attached to corner posts.
- f. The reserve pit fencing will be on three sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.
- g. Location size may change prior to drilling the well due to the current rig availability. If the proposed location is not large enough to accommodate the drilling, the location will be re-surveyed and a Form 9 will be submitted.

10. Plans for Surface Reclamation:

Producing Location:

- a. Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, materials, trash and debris not required for production.
- b. Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 40CFR 3162.7.
- c. Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.
- d. The reserve pit and that portion of the location not needed for production facilities / operations will be re-contoured to the approximated natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.
- e. To prevent surface water(s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface 3 feet above surrounding round surface to allow the reclaimed pit area to drain effectively.
- f. Upon completion of back filling, leveling and re-contouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

Dry Hole/Abandoned Location:

- i. Abandoned well sites, roads and other disturbed areas will be restored as nearly as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions and re-establishment of vegetation as specified.
- ii. All disturbed surfaces will be re-contoured to the approximated natural contours with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. If necessary, re-seeding operations will be performed after completion of other reclamation operations.

Seed Mixture for Windrowed Top Soil Will Included:

To be provided by the BLM

11. Surface Ownership: Location, Access and Pipeline Route:

Wellsite: Bureau of Land Management
Access: Bureau of Land Management and SITLA
Pipeline: Bureau of Land Management and SITLA

12. Other Information

On-site Inspection for Location, Access and Pipeline Route:

The on-site was conducted on October 16, 2007

Attending were:

1. Melissa Hawk – BLM
2. Scott Ackerman - BLM
3. Mike Stewart - Ponderosa Construction
4. Kolby Kay – Timberline Surveying
5. Doug Hammond - Enduring Resources

Special Conditions of Approval:

None for this well(s).

Archeology:

- a. A Cultural Resource Inventory Report is pending and to be prepared by Montgomery Archaeological Consultants.

Paleontology:

- b. A Paleontology Reconnaissance Report is pending and to be prepared by Intermountain Paleo-Consulting.

If, during operations, any archaeological or historical sites, or any objects of antiquity (subject to the Antiquities Act of June 8, 1906) are discovered, all operations which would affect such sites will be suspended and the discovery reported promptly to the surface management agency.

13. **Lessee's or Operator's Representatives:**

Representatives:

Alvin R. (Al) Arlian
Landman – Regulatory Specialist
Enduring Resources, LLC
475 17th Street, Suite 1500
Denver, Colorado 80202
Office Tel: 303-350-5114
Fax Tel: 303-573-0461
aarlian@enduringresources.com

Doug Hammon
Utah Superintendent
Enduring Resources, LLC
759 E. 500 South
Vernal, Utah 84078
Office Tel: 435-781-0172
Fax Tel: 435-781-0174
dhammond@enduringresources.com

SELF-CERTIFICATION STATEMENT

The following self-certification statement is provided per federal requirements dated June 15, 1988.

Please be advised that Enduring Resources, LLC is considered to be the operator of the following well.

Hanging Rock 11-23-44-35

Surface Location: SESE Sec. 35-11S-23E

644' FSL – 831' FEL

Lease Serial No.: UTU-73694

Uintah County, Utah

Enduring Resources, LLC is responsible under the terms and conditions of the lease for the operations conducted upon leased lands. Bond coverage is provided by UTB000173.



Alvin R. (Al) Arlian
Landman – Regulatory Specialist
Enduring Resources, LLC
475 17th Street, Suite 1500
Denver, CO 80202
(303) 350-5114

10/26/2007

Date

ENDURING RESOURCES
Hanging Rock 11-23-44-35
Section 35, T11S, R23E, S.L.B.&M.

FROM THE INTERSECTION OF U.S. HIGHWAY 40 AND 500 EAST STREET IN VERNAL, UTAH PROCEED IN AN EASTERLY THEN SOUTHERLY DIRECTION ALONG U.S. HIGHWAY 40 APPROXIMATELY 3.3 MILES TO THE JUNCTION OF STATE HIGHWAY 45; EXIT RIGHT AND PROCEED IN A SOUTHERLY DIRECTION ALONG STATE HIGHWAY 45 APPROXIMATELY 40.5 MILES TO THE JUNCTION OF THE DRAGON ROAD (COUNTY B ROAD 4180). THIS ROAD IS LOCATED APPROXIMATELY 4.5 MILES SOUTH OF BONANZA, UTAH. EXIT LEFT AND PROCEED IN A SOUTHEASTERLY DIRECTION ALONG COUNTY B ROAD 4180 APPROXIMATELY 4.0 MILES TO THE JUNCTION OF THE KINGS WELLS ROAD (COUNTY B ROAD 4190). EXIT RIGHT AND PROCEED IN A SOUTHWESTERLY DIRECTION ALONG COUNTY B ROAD 4190 APPROXIMATELY 8.7 MILES TO THE JUNCTION OF THE ATCHEE RIDGE ROAD (COUNTY B ROAD 4270). CONTINUE ALONG COUNTY B ROAD 4190 IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 4.3 MILES TO THE JUNCTION OF THE LONG DRAW ROAD (COUNTY B ROAD 4260). CONTINUE ALONG COUNTY B ROAD 4190 IN A SOUTHERLY, THEN WESTERLY DIRECTION APPROXIMATELY 4.0 MILES TO THE JUNCTION OF COUNTY B ROAD 4160. EXIT RIGHT AND PROCEED IN A NORTHERLY DIRECTION ALONG COUNTY B ROAD 4160 APPROXIMATELY 1.5 MILES TO THE PROPOSED ACCESS ROAD. FOLLOW ROAD FLAGS IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 2,240 FEET TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 66.7 MILES IN A SOUTHEASTERLY DIRECTION.

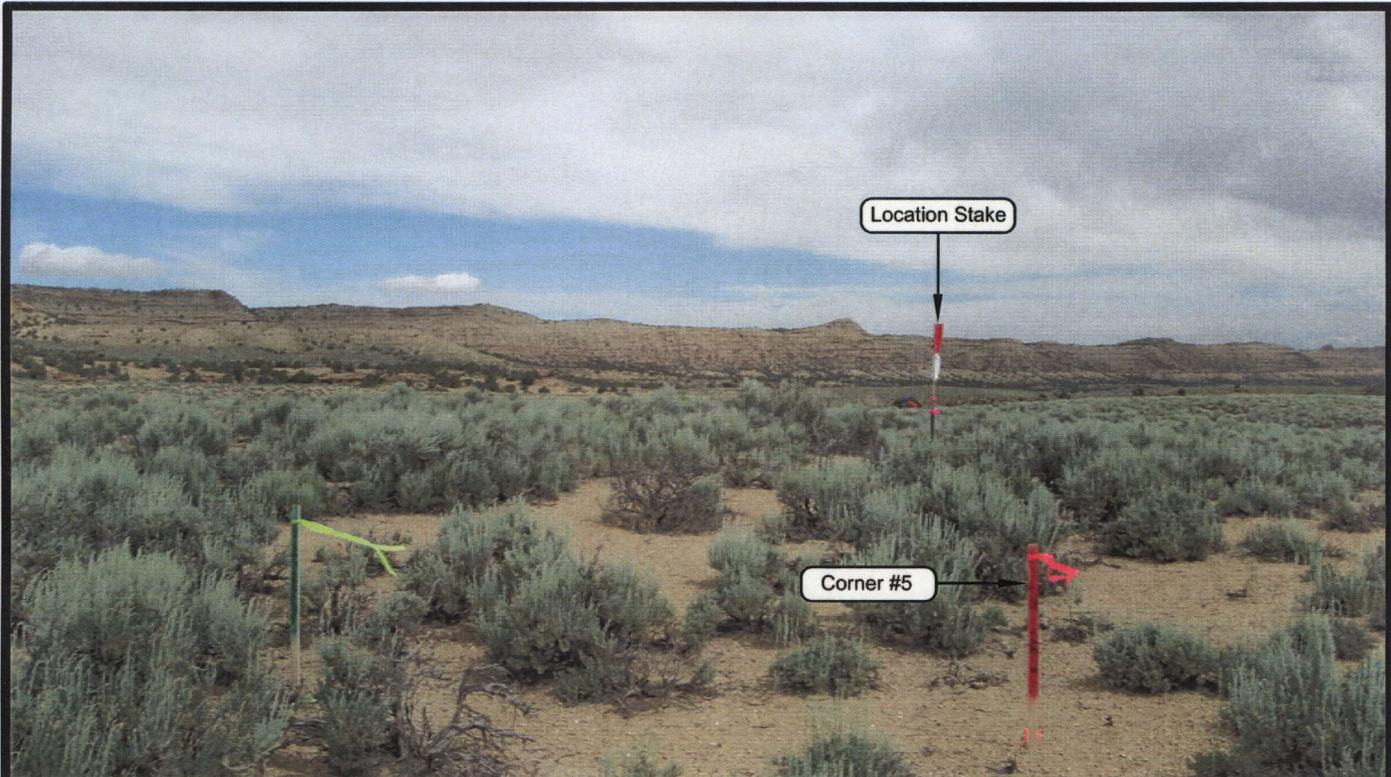


PHOTO VIEW: FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY

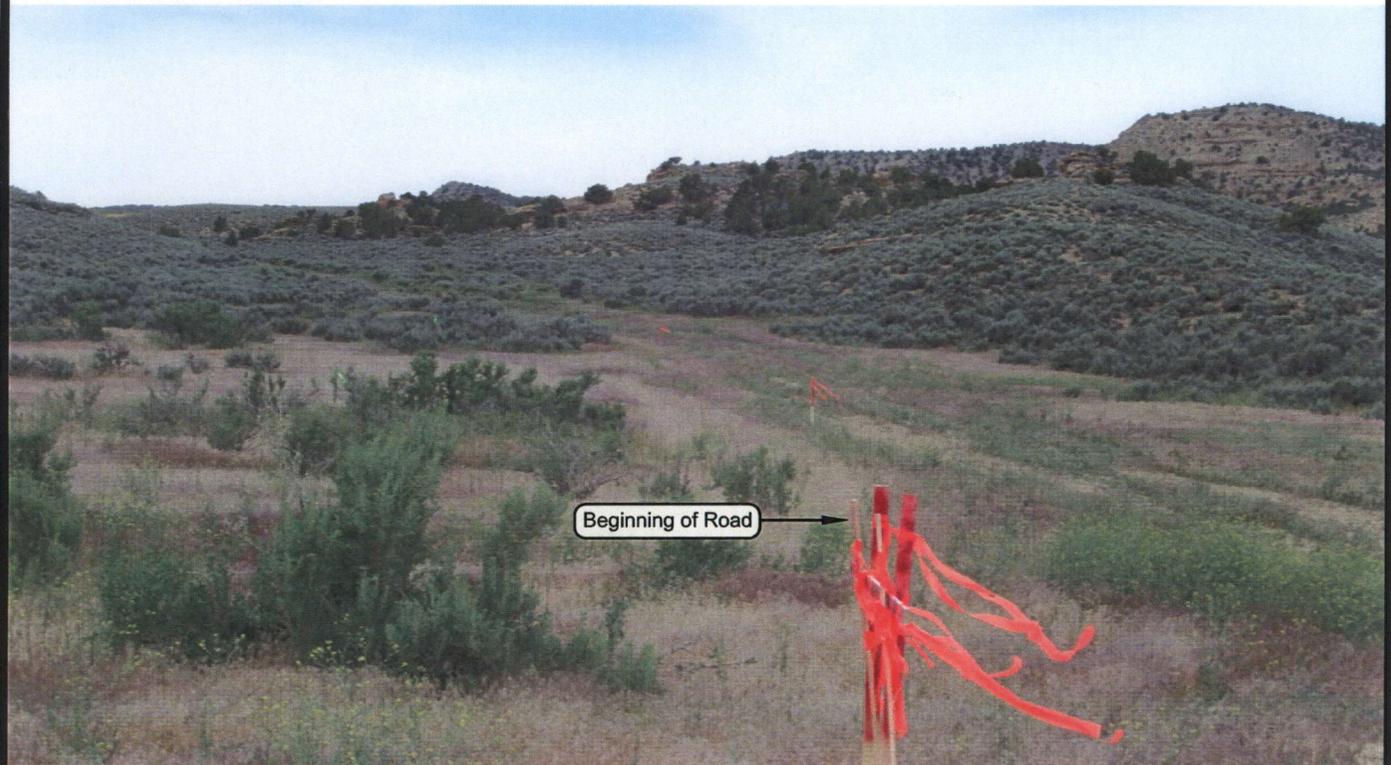


PHOTO VIEW: FROM BEGINNING OF PROPOSED ROAD

CAMERA ANGLE: SOUTHWESTERLY

ENDURING RESOURCES

**Hanging Rock 11-23-44-35
SECTION 35, T11S, R23E, S.L.B.&M.**

LOCATION PHOTOS

DATE TAKEN: 06-06-07

DATE DRAWN: 06-08-07

TAKEN BY: M.S.B.

DRAWN BY: M.W.W.


REVISED:

Timberline (435) 789-1365
Engineering & Land Surveying, Inc.
38 WEST 100 NORTH VERNAL, UTAH 84078

SHEET
1
OF 10

ENDURING RESOURCES




CUT SHEET - HANGING ROCK 11-23-44-35

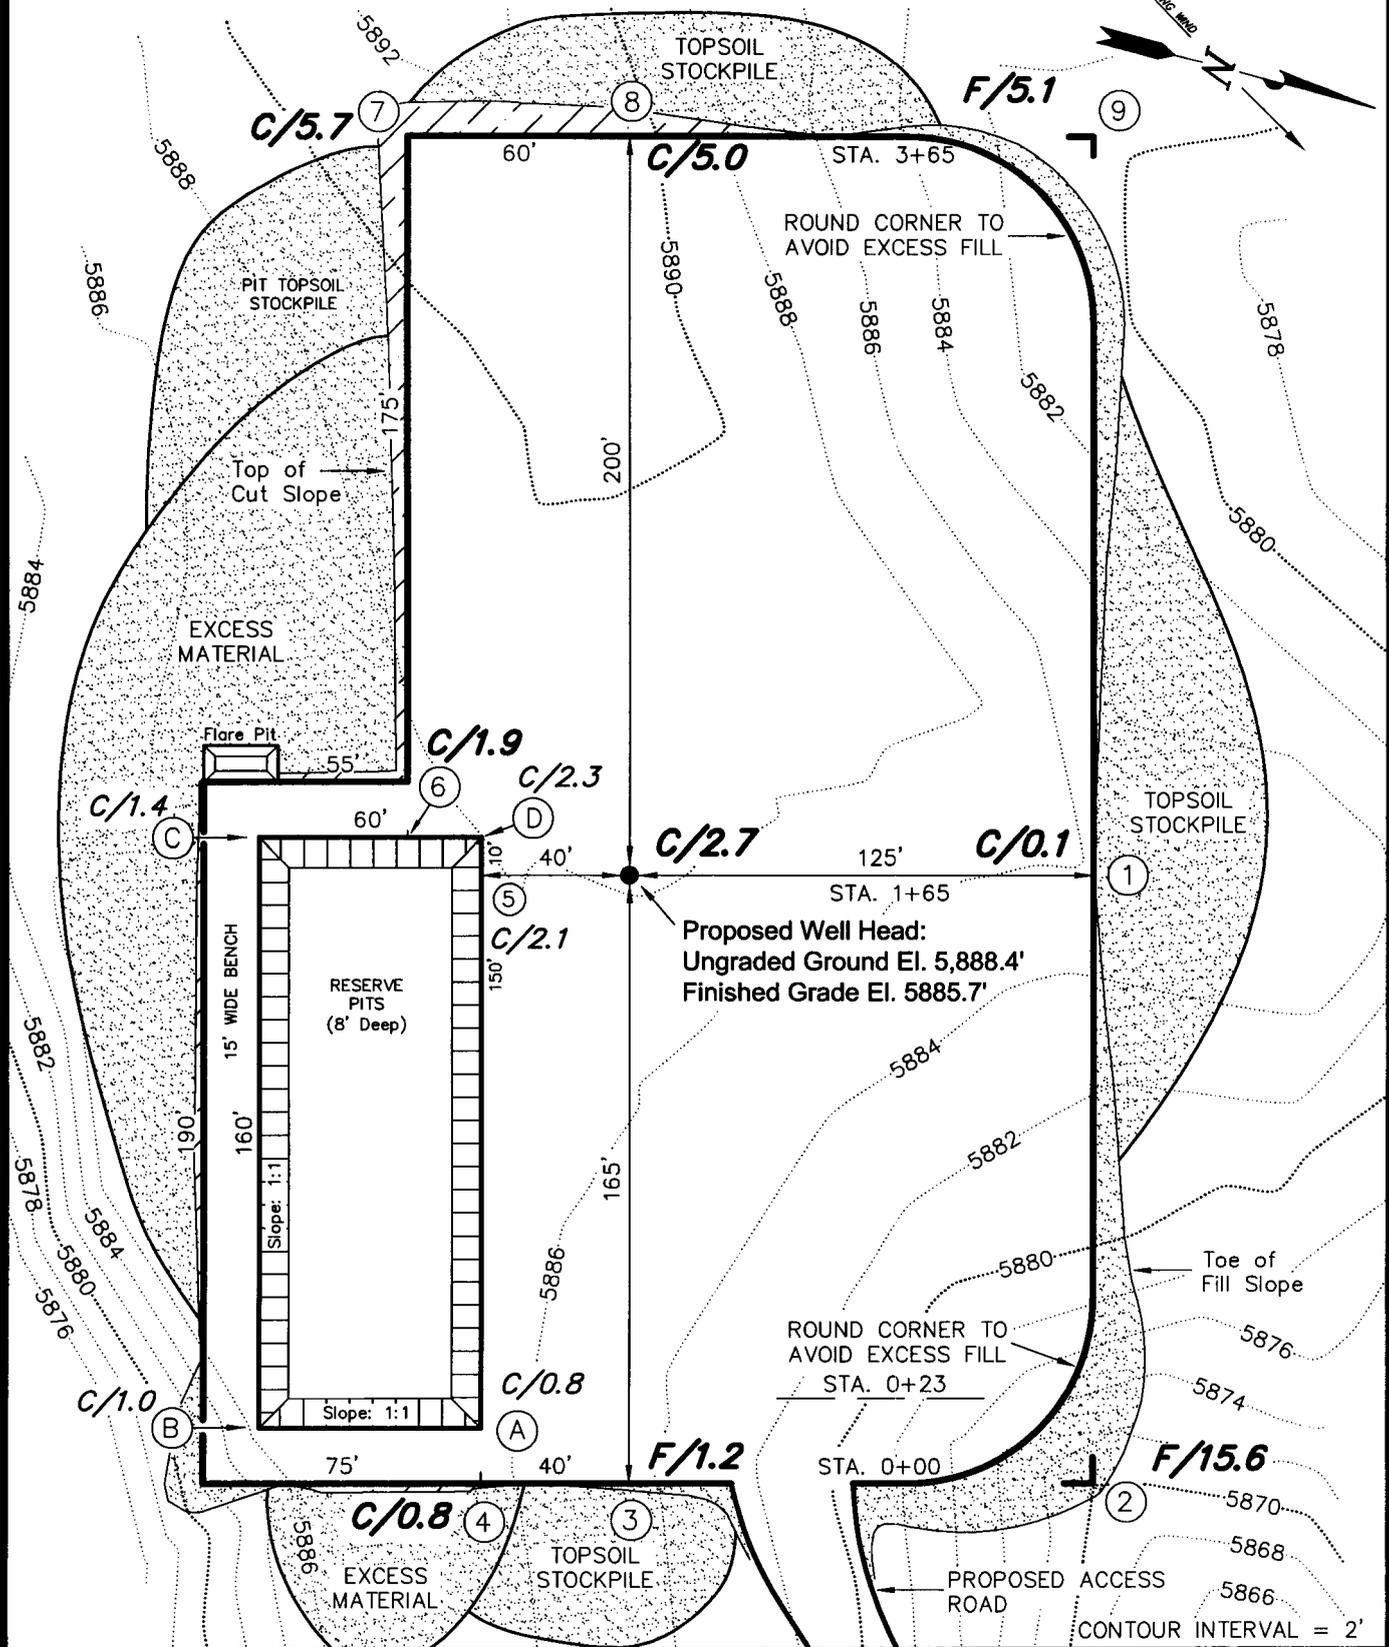


Section 35, T11S, R23E, S.L.B.&M.		Qtr/Qtr Location: SE SE	Footage Location: 644' FSL & 831' FEL
Date Surveyed: 06-06-07	Date Drawn: 06-07-07	Date Last Revision:	Timberline <i>Engineering & Land Surveying, Inc.</i> (435) 789-1365 38 WEST 100 NORTH VERNAL, UTAH 84078
Surveyed By: M.S.B.	Drawn By: M.W.W.	Scale: 1" = 50'	
			SHEET 3 OF 10

ENDURING RESOURCES

CROSS SECTIONS - HANGING ROCK 11-23-44-35

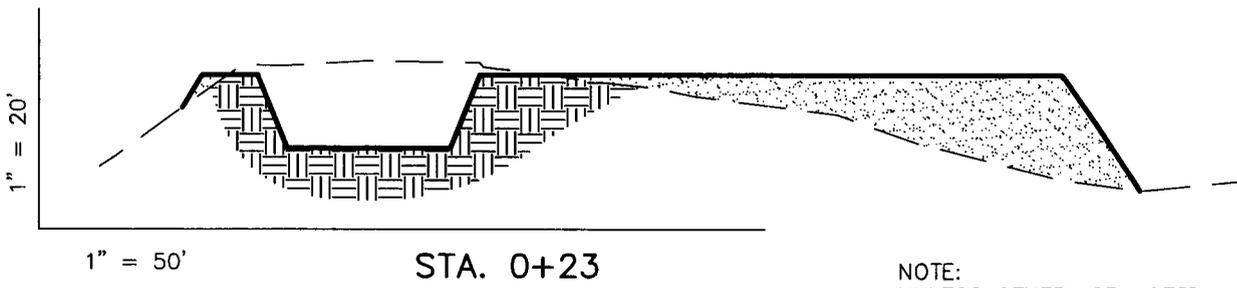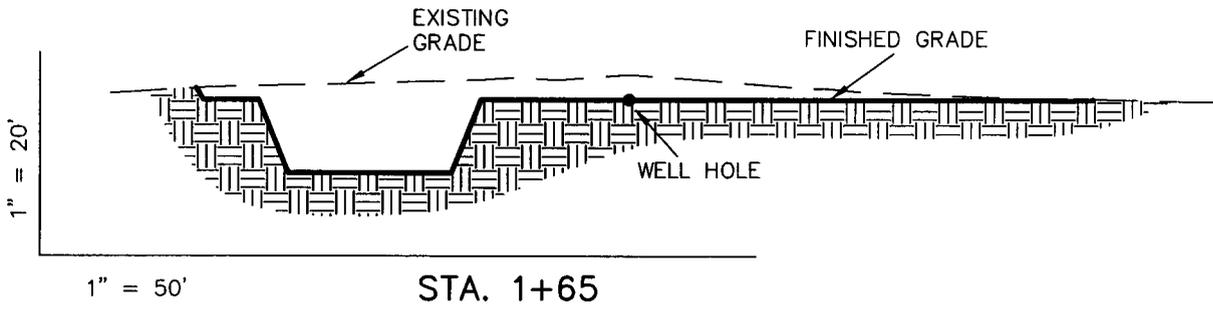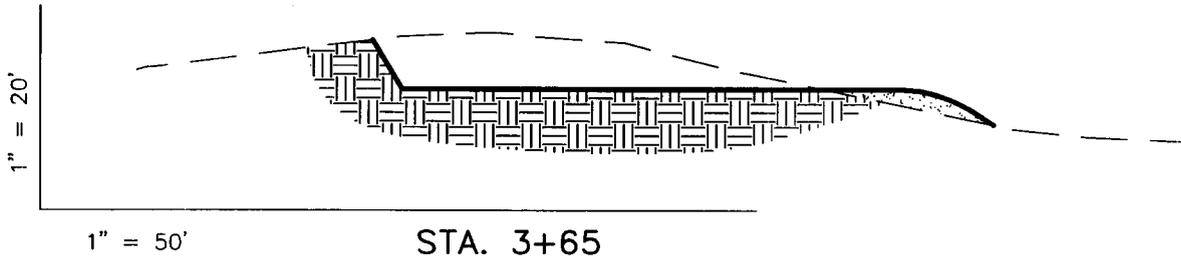

NOTE:
UNLESS OTHERWISE NOTED
ALL CUT/FILL SLOPES ARE
AT 1.5:1

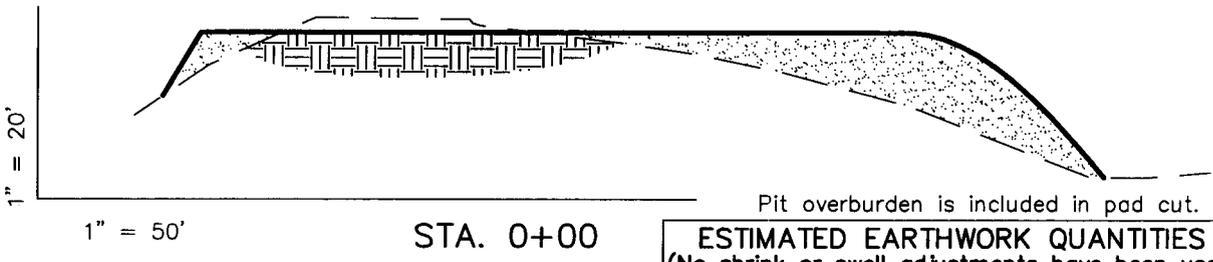

Pit overburden is included in pad cut.

REFERENCE POINTS

- 175' NORTHERLY = 5885.4'
- 225' NORTHERLY = 5883.1'
- 250' WESTERLY = 5888.9'
- 300' WESTERLY = 5890.8'

ESTIMATED EARTHWORK QUANTITIES
(No shrink or swell adjustments have been used)
(Expressed in Cubic Yards)


ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	3,660	3,660	Topsoil is not included in Pad Cut	0
PIT	2,340	0		2,340
TOTALS	6,000	3,660	1,440	2,340

Excess Material after Pit Rehabilitation = 0 Cu. Yds.

Section 35, T11S, R23E, S.L.B.&M.		Qtr/Qtr Location: SE SE	Footage Location: 644' FSL & 831' FEL
Date Surveyed: 06-06-07	Date Drawn: 06-07-07	Date Last Revision:	Timberline (435) 789-1365 <i>Engineering & Land Surveying, Inc.</i> 38 WEST 100 NORTH VERNAL, UTAH 84078
Surveyed By: M.S.B.	Drawn By: M.W.W.	Scale: 1" = 50'	

ENDURING RESOURCES


TYPICAL RIG LAYOUT - HANGING ROCK 11-23-44-35

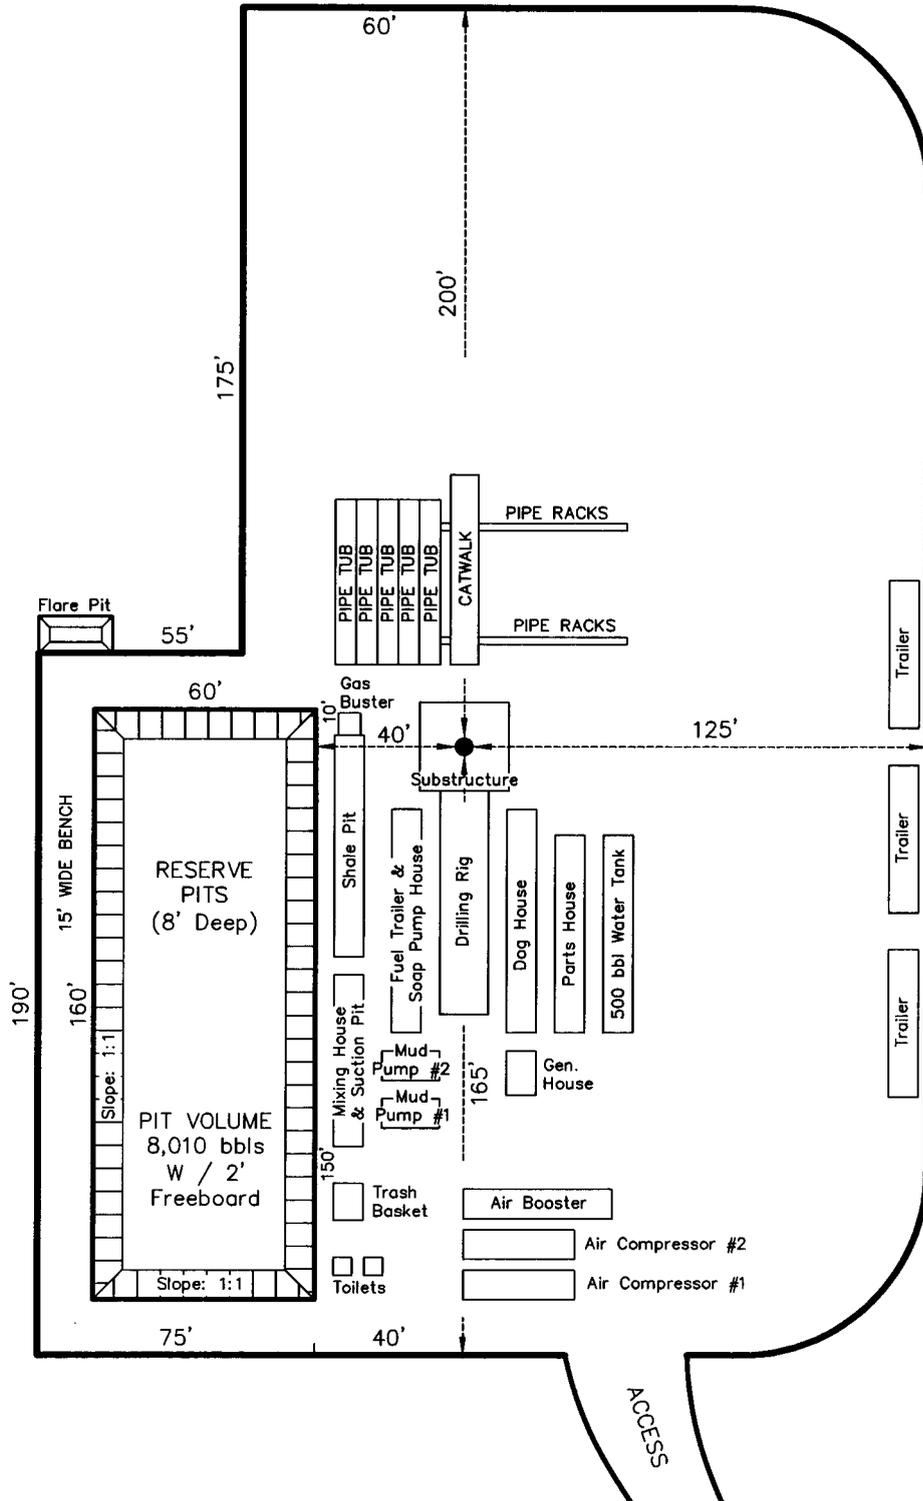


Section 35, T11S, R23E, S.L.B.&M.		Qtr/Qtr Location: SE SE		Footage Location: 644' FSL & 831' FEL	
Date Surveyed: 06-06-07	Date Drawn: 06-07-07	Date Last Revision:		Timberline <i>Engineering & Land Surveying, Inc.</i> (435) 789-1365 38 WEST 100 NORTH VERNAL, UTAH 84078	SHEET 5 OF 10
Surveyed By: M.S.B.	Drawn By: M.W.W.	Scale: 1" = 50'			

ENDURING RESOURCES

TYPICAL PRODUCTION LAYOUT – HANGING ROCK 11-23-44-35

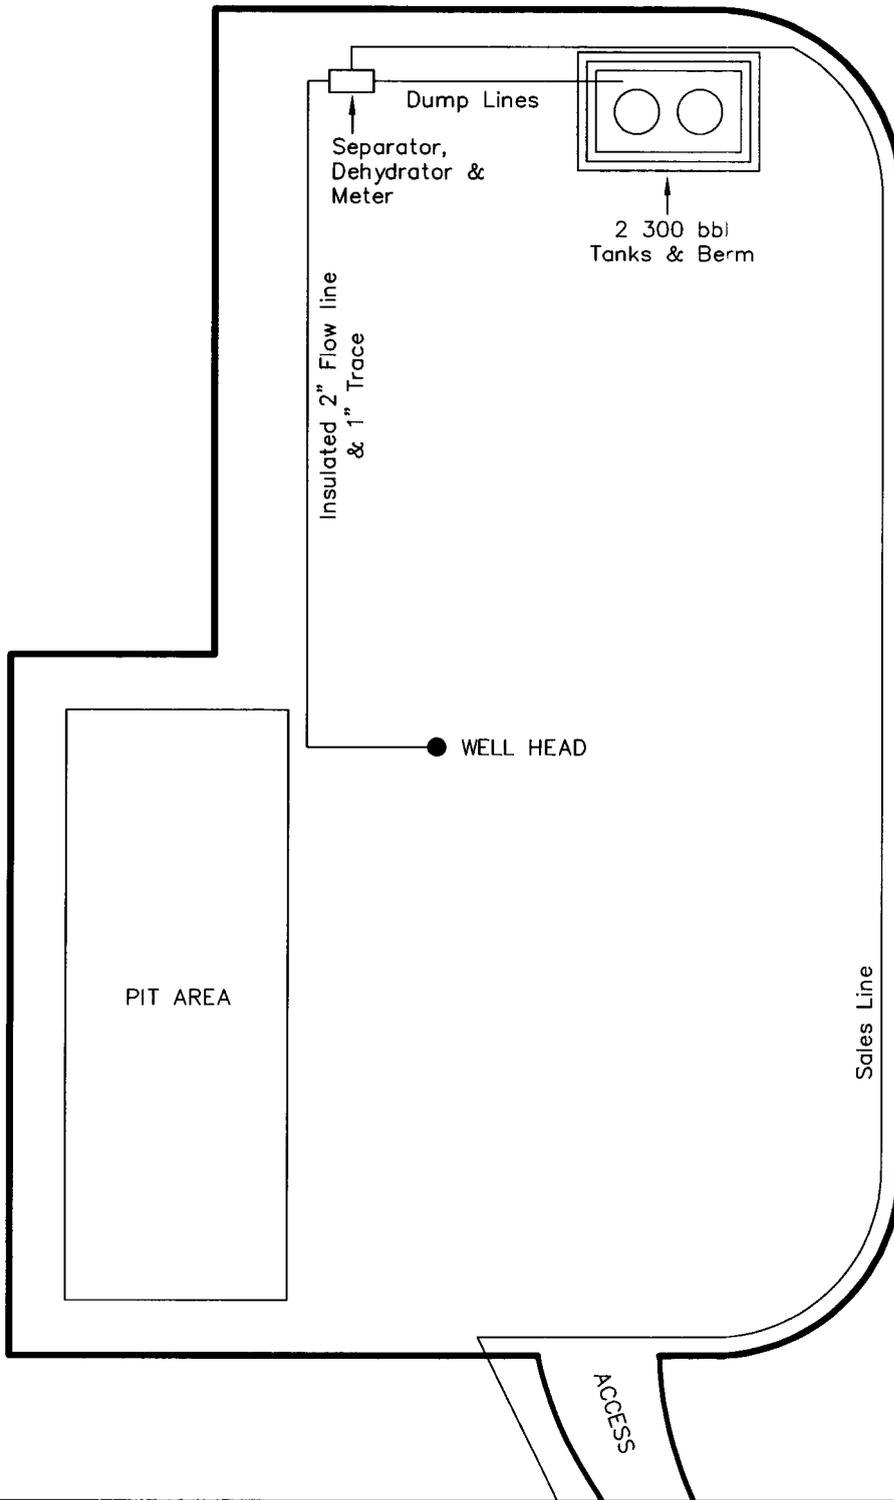

Section 35, T11S, R23E, S.L.B.&M.		Qtr/Qtr Location: SE SE	Footage Location: 644' FSL & 831' FEL
Date Surveyed: 06-06-07	Date Drawn: 06-07-07	Date Last Revision:	Timberline (435) 789-1365 <i>Engineering & Land Surveying, Inc.</i> 38 WEST 100 NORTH VERNAL, UTAH 84078
Surveyed By: M.S.B.	Drawn By: M.W.W.	Scale: 1" = 50'	

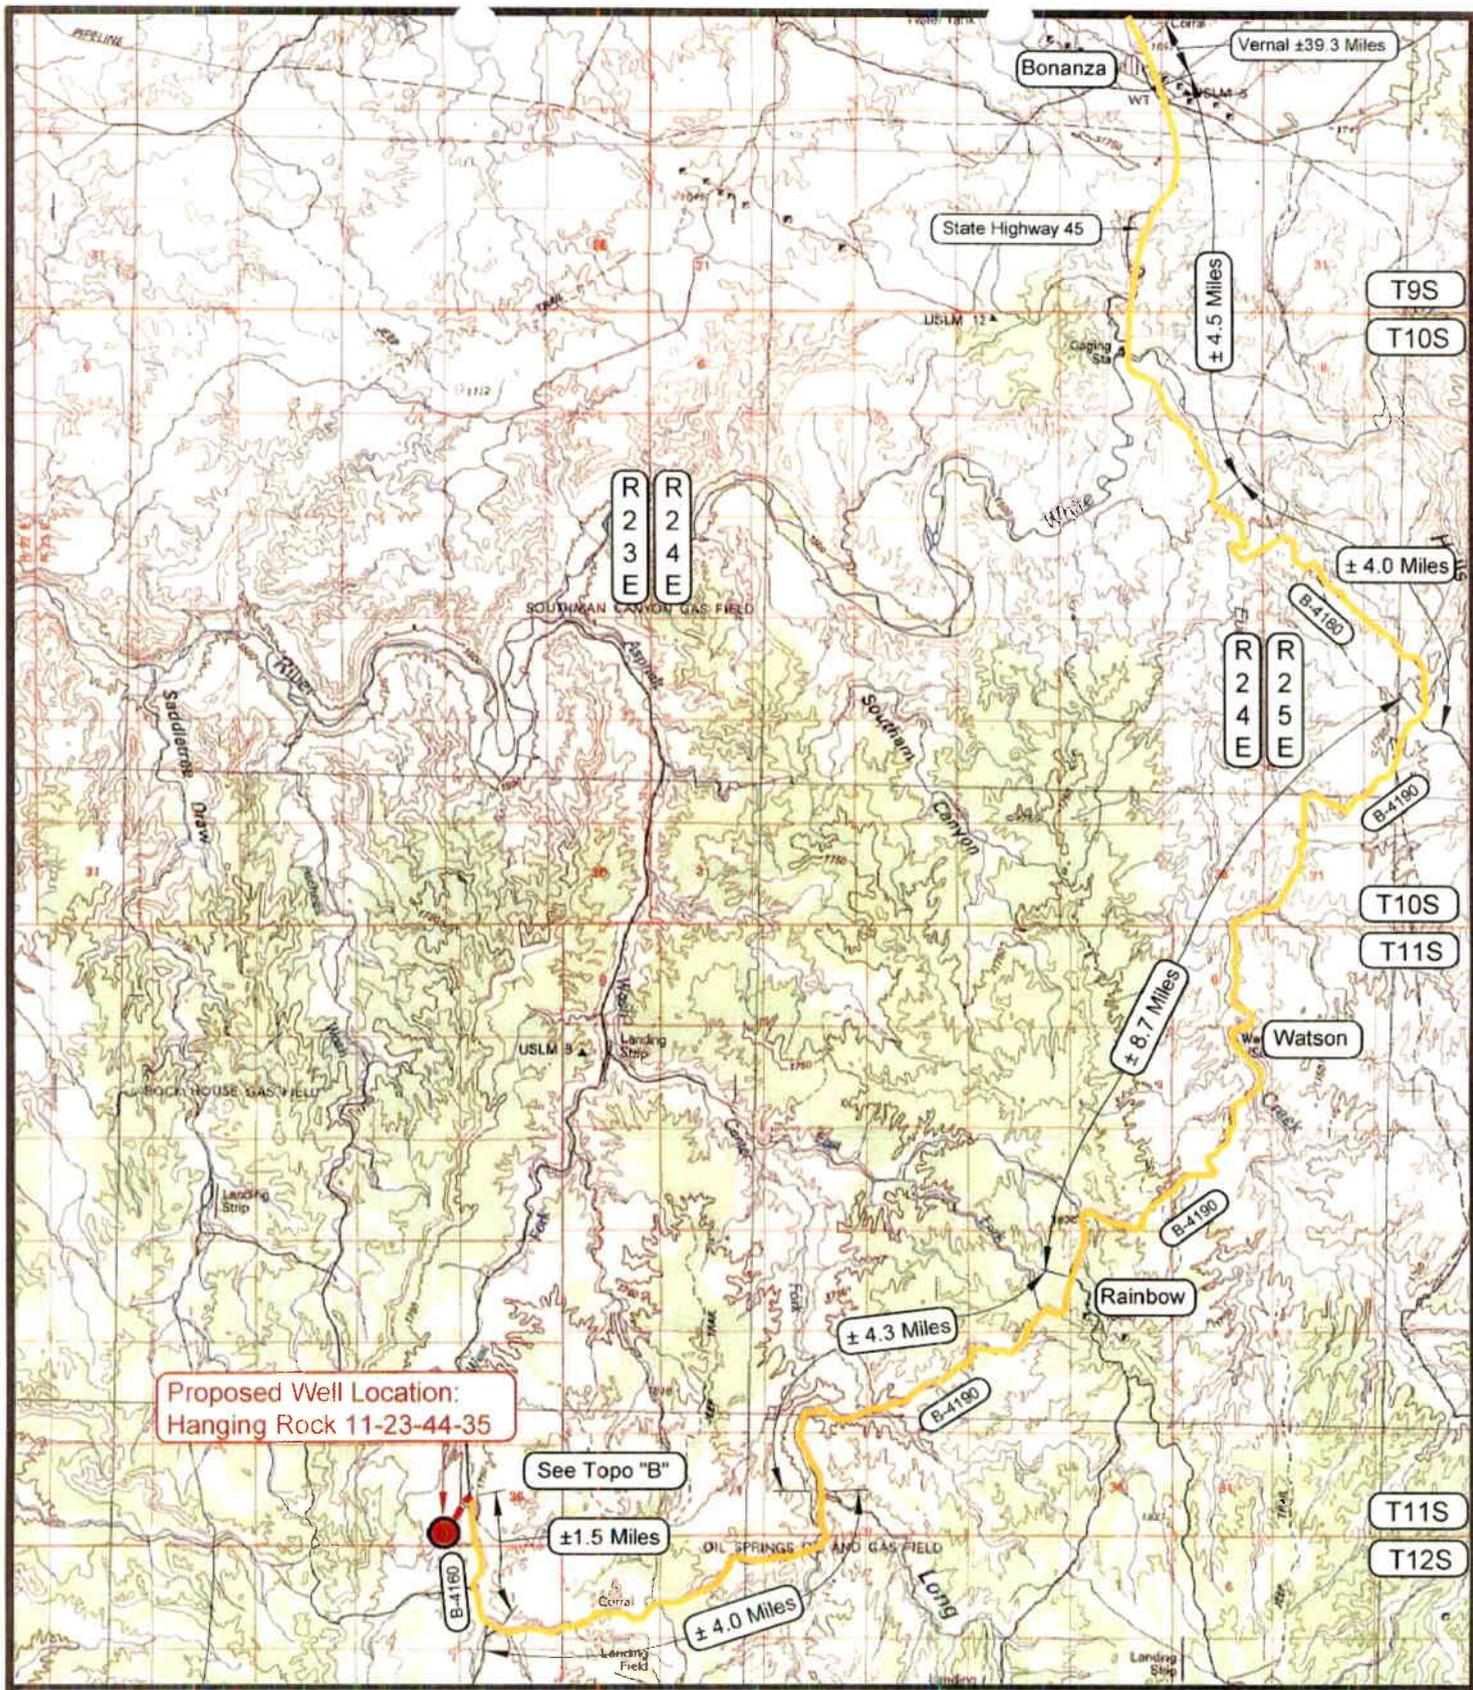

Proposed Well Location:
Hanging Rock 11-23-44-35

LEGEND

- PROPOSED ACCESS ROAD
- = SUBJECT WELL
- = OTHER WELLS
- = EXISTING ROAD
- = EXISTING ROAD (TO BE IMPROVED)
- (B-5460) = COUNTY ROAD CLASS & NUMBER

ENDURING RESOURCES

**Hanging Rock 11-23-44-35
SECTION 35, T11S, R23E, S.L.B.&M.**

TOPOGRAPHIC MAP "A"

DATE SURVEYED: 06-06-07

DATE DRAWN: 06-07-07


SCALE: 1" = 10,000'

DRAWN BY: M.W.W.

REVISED:

Timberline (435) 789-1365
Engineering & Land Surveying, Inc.
38 WEST 100 NORTH VERNAL, UTAH 84078

SHEET
7
OF 10

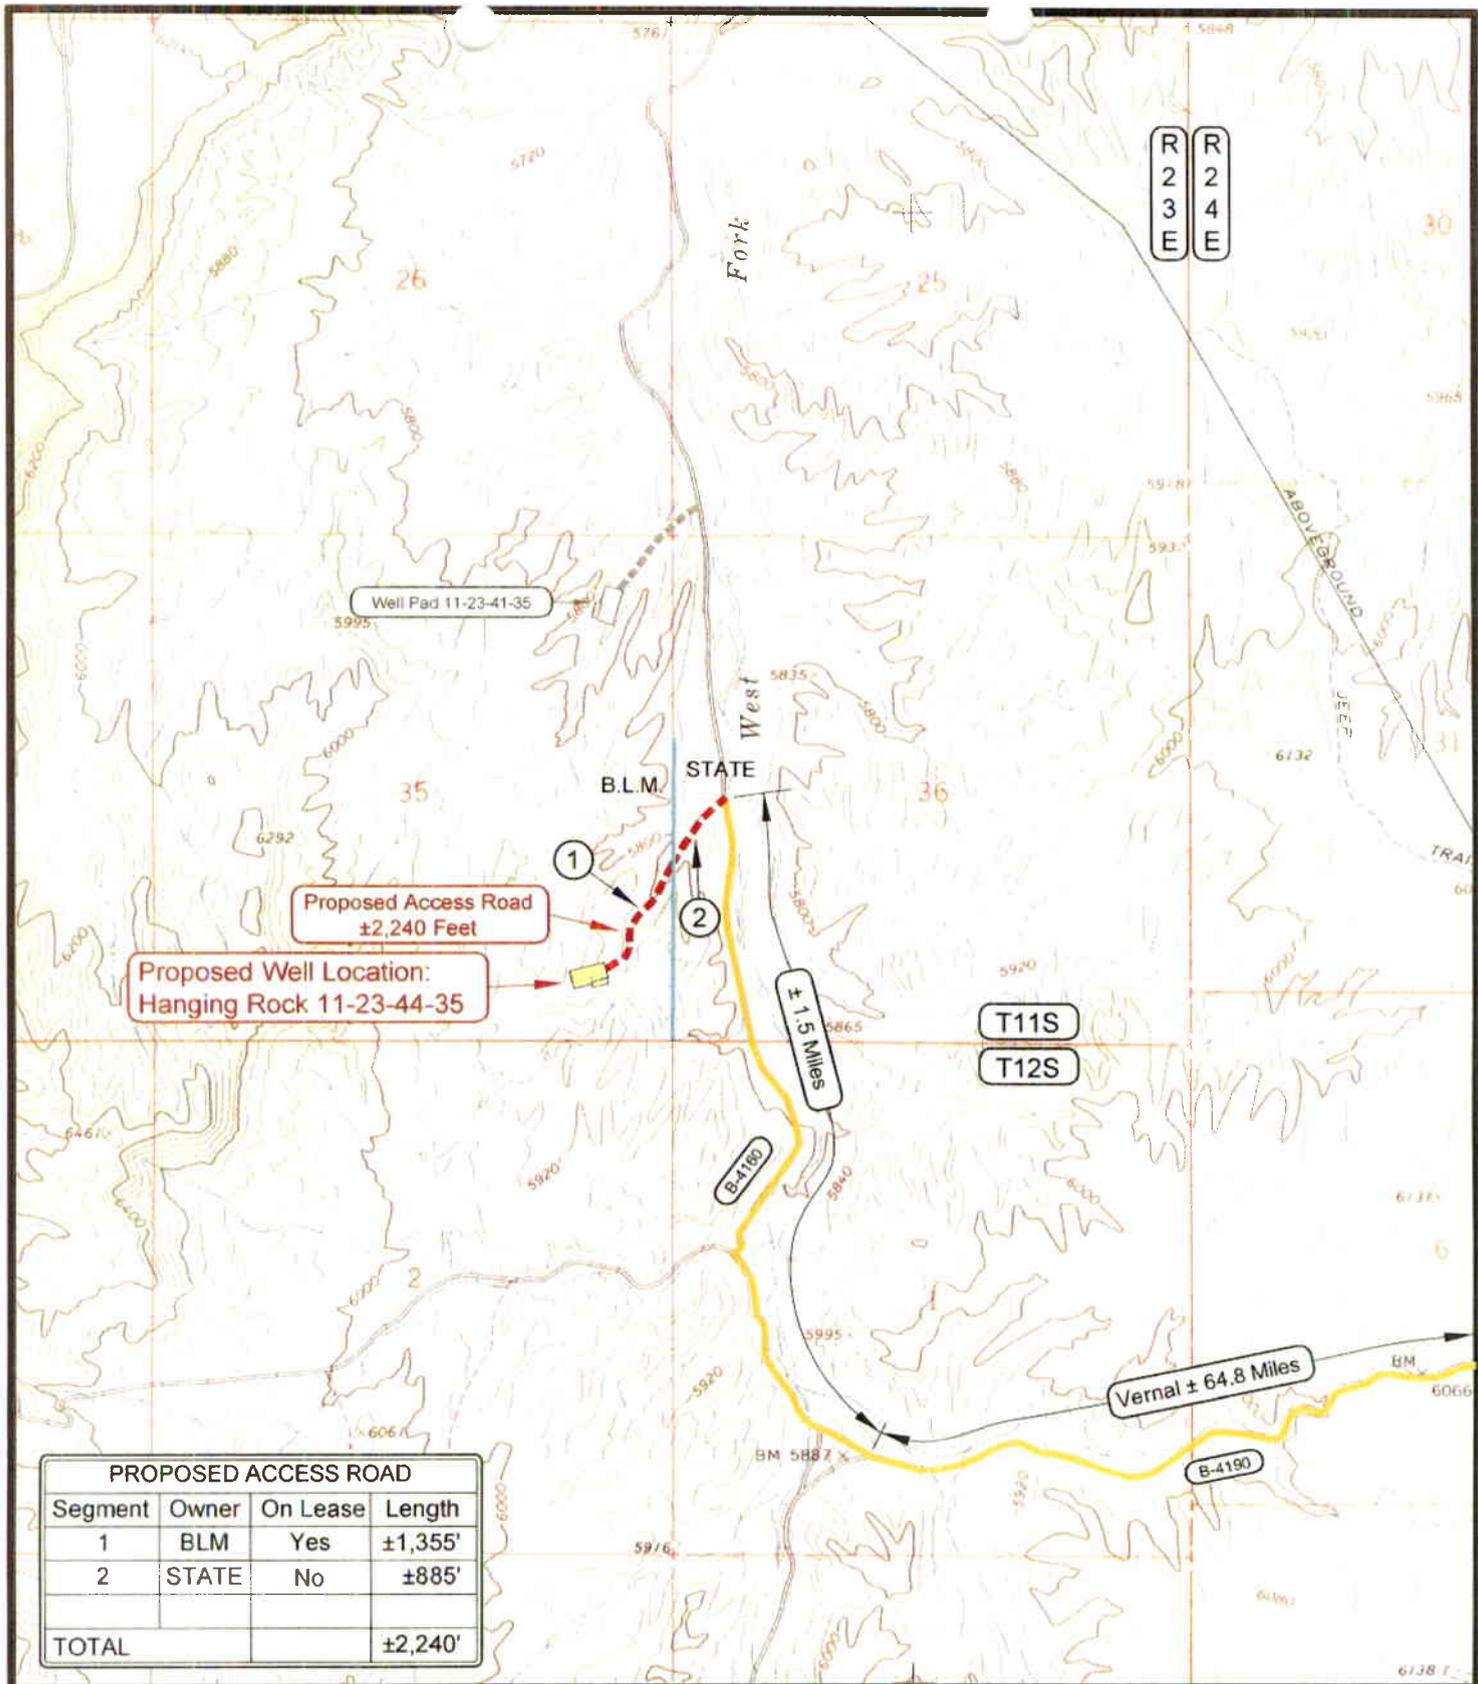

PROPOSED ACCESS ROAD			
Segment	Owner	On Lease	Length
1	BLM	Yes	±1,355'
2	STATE	No	±885'
TOTAL			±2,240'

LEGEND

- = SUBJECT WELL
 --- = LEASE LINE AND / OR PROPERTY LINE
- = OTHER WELLS
- = EXISTING ROAD
- = EXISTING ROAD (TO BE IMPROVED)
- B-5460 = COUNTY ROAD CLASS & NUMBER


ENDURING RESOURCES

**Hanging Rock 11-23-44-35
SECTION 35, T11S, R23E, S.L.B.&M.**

TOPOGRAPHIC MAP "B"		DATE SURVEYED: 06-06-07
SCALE: 1" = 2000'		DATE DRAWN: 06-07-07
DRAWN BY: M.W.W.	REVISED:	

Timberline (435) 789-1365
 Engineering & Land Surveying, Inc.
 38 WEST 100 NORTH VERNAL, UTAH 84078

SHEET
8
 OF 10

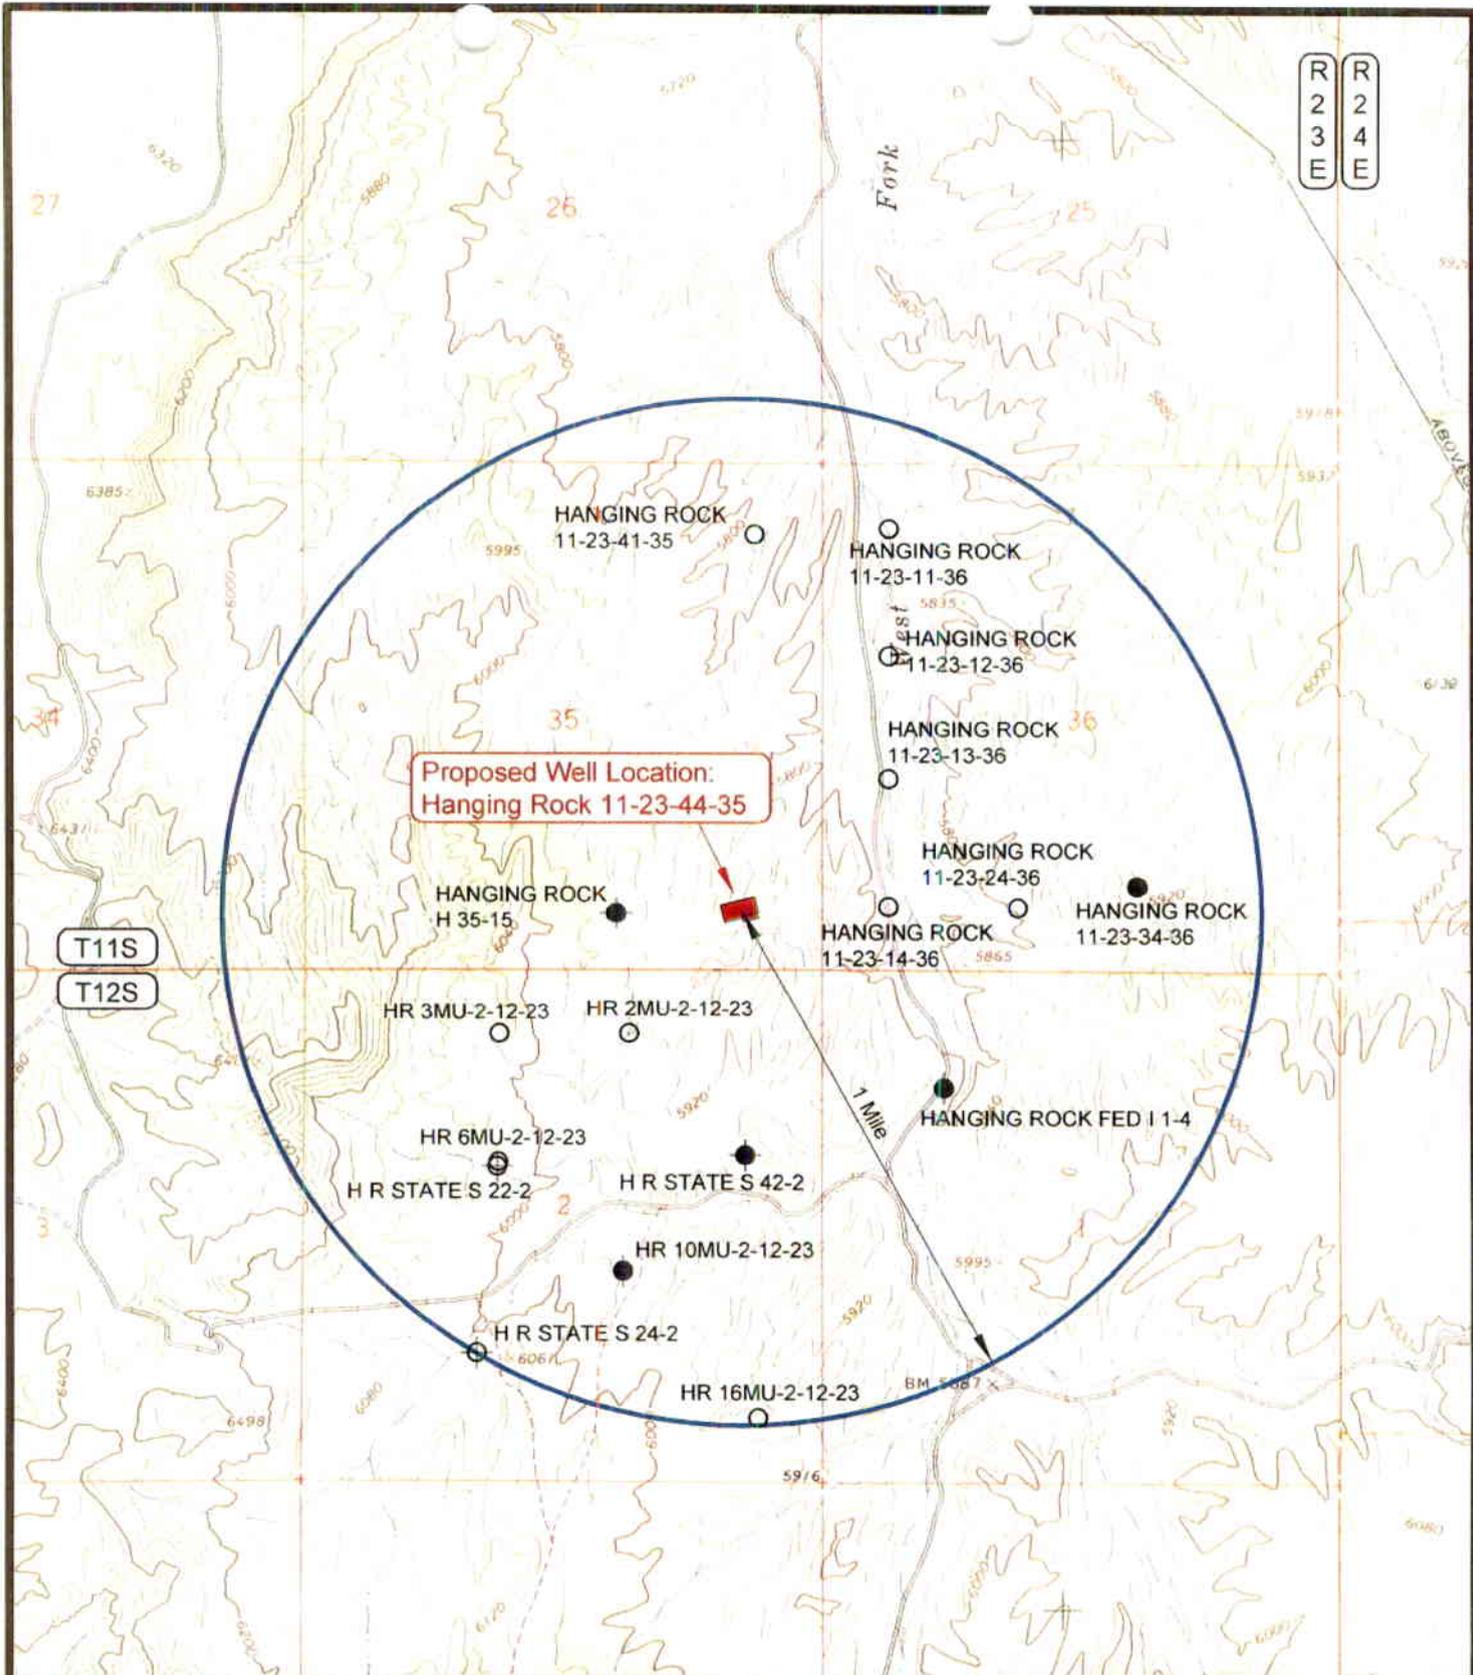

LEGEND

- = DISPOSAL WELL
- = PRODUCING WELL
- = SHUT IN WELL
- = PROPOSED WELL
- = WATER WELL
- = ABANDONED WELL
- = TEMPORARILY ABANDONED WELL
- ⊕ = ABANDONED LOCATION

ENDURING RESOURCES

**Hanging Rock 11-23-44-35
SECTION 35, T11S, R23E, S.L.B.&M.**

TOPOGRAPHIC MAP "C"

DATE SURVEYED: 06-06-07

DATE DRAWN: 06-08-07

SCALE: 1" = 2000'

DRAWN BY: M.W.W.

REVISED:

Timberline

(435) 789-1365


Engineering & Land Surveying, Inc.

38 WEST 100 NORTH VERNAL, UTAH 84078

SHEET

9

OF 10

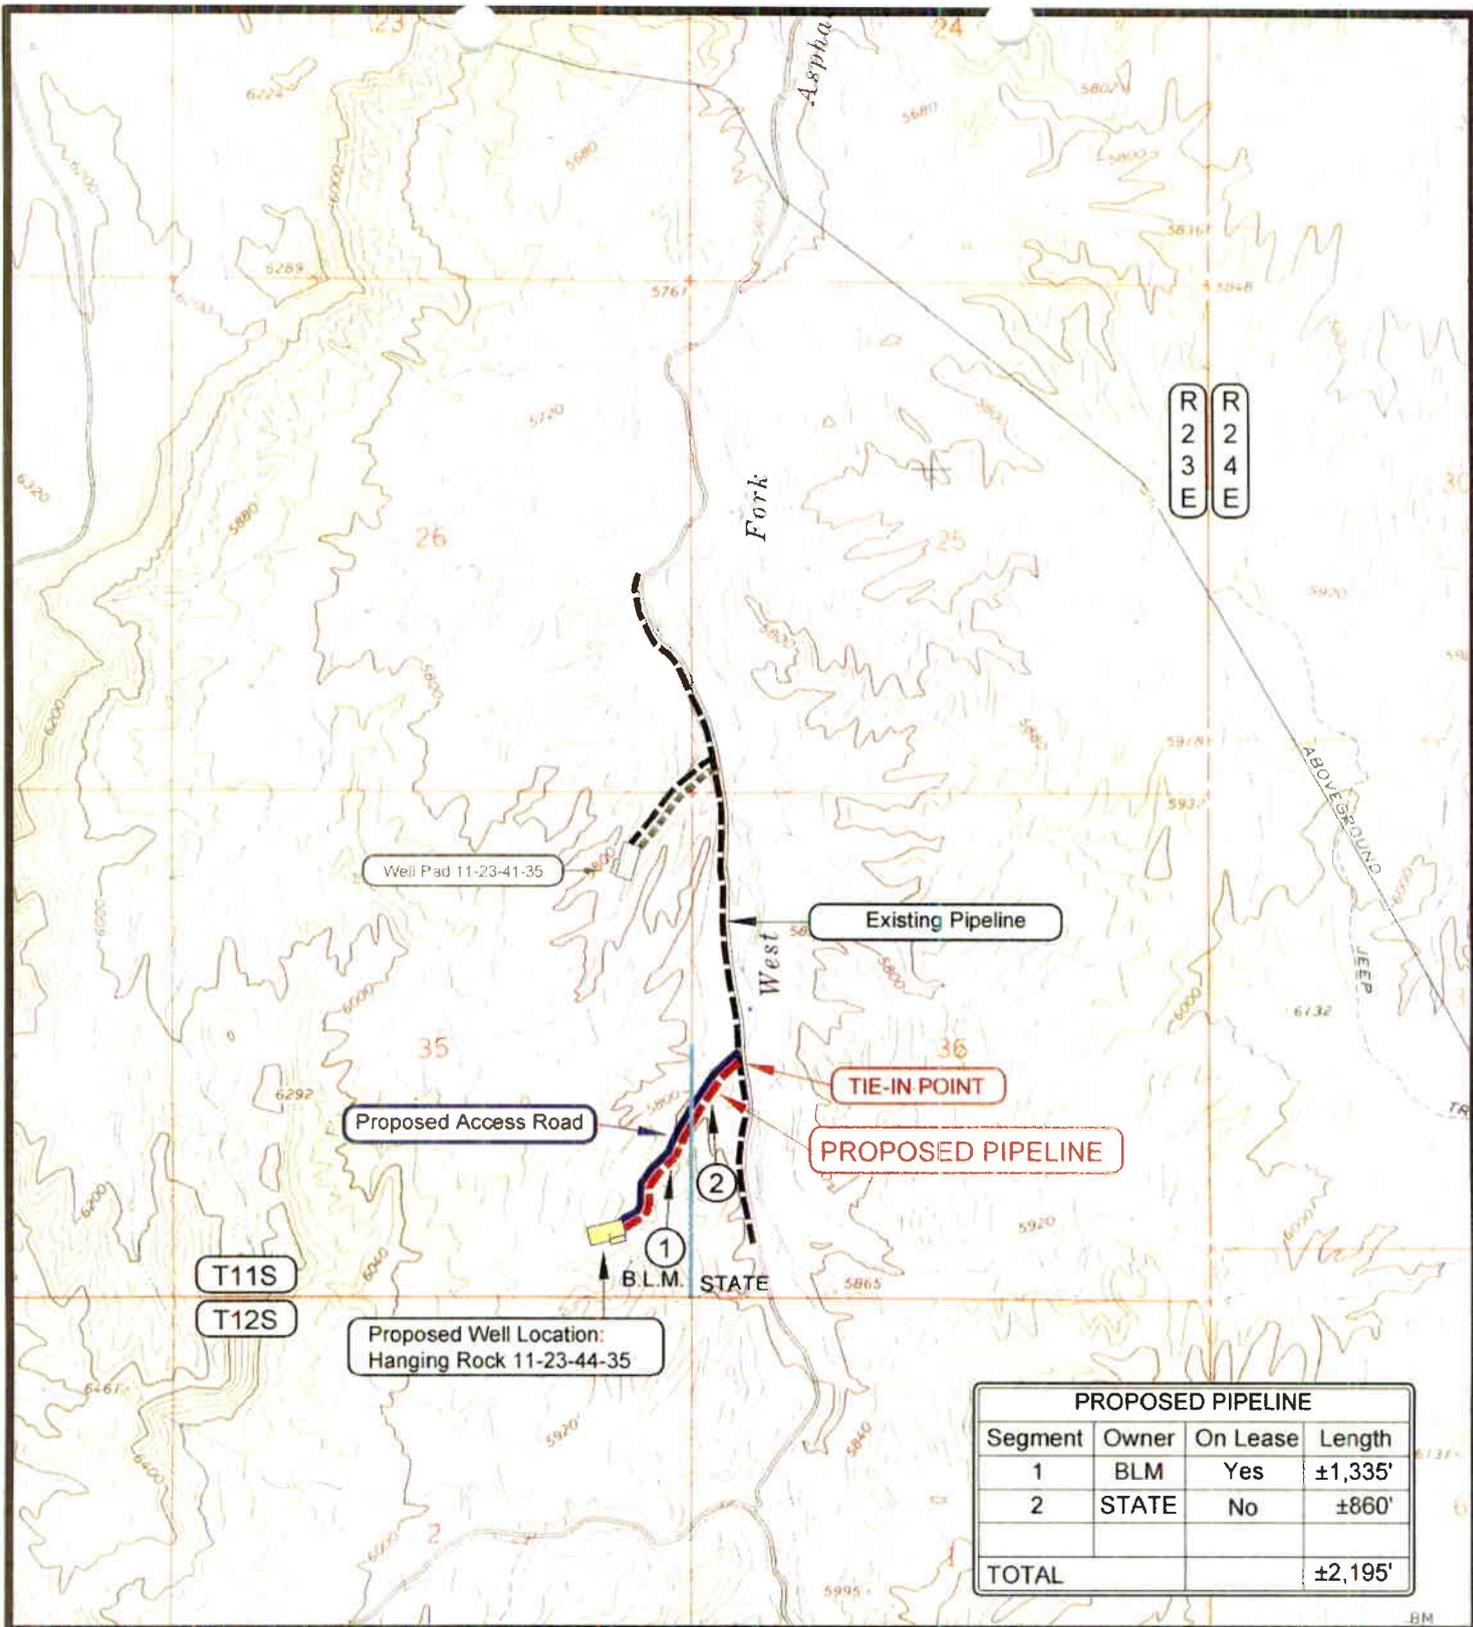

PROPOSED PIPELINE			
Segment	Owner	On Lease	Length
1	BLM	Yes	±1,335'
2	STATE	No	±860'
TOTAL			±2,195'

APPROXIMATE PIPELINE LENGTH = ±2,195 FEET

LEGEND

- = PROPOSED PIPELINE
- = OTHER PIPELINE
- = LEASE LINE AND / OR PROPERTY LINE
- = PROPOSED ACCESS ROAD
- = SUBJECT WELL
- = OTHER WELLS

ENDURING RESOURCES

**Hanging Rock 11-23-44-35
SECTION 35, T11S, R23E, S.L.B.&M.**

TOPOGRAPHIC MAP "D"		DATE SURVEYED: 06-06-07
SCALE: 1" = 2000'	DRAWN BY: M.W.W.	DATE DRAWN: 06-08-07
		REVISED:

Timberline (435) 789-1365
 Engineering & Land Surveying, Inc.
 38 WEST 100 NORTH VERNAL, UTAH 84078

**SHEET
10
OF 10**

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 10/31/2007

API NO. ASSIGNED: 43-047-39748

WELL NAME: HANGING ROCK 11-23-44-35
 OPERATOR: ENDURING RESOURCES, LLC (N2750)
 CONTACT: AL ARLIAN

PHONE NUMBER: 303-350-5114

PROPOSED LOCATION:

SESE 35 110S 230E
 SURFACE: 0644 FSL 0831 FEL
 BOTTOM: 0644 FSL 0831 FEL
 COUNTY: UINTAH
 LATITUDE: 39.81147 LONGITUDE: -109.3034
 UTM SURF EASTINGS: 645230 NORTHINGS: 4408000
 FIELD NAME: OIL SPRINGS (635)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal
 LEASE NUMBER: UTU-73694
 SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: MVRD
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. RLB0008031)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 49-2249)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)

LOCATION AND SITING:

- R649-2-3.
- Unit: _____
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
- Board Cause No: _____
- Eff Date: _____
- Siting: _____
- R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: _____

1. Sealing System
2. Spacing Strip

T11S R23E

HANGING ROCK
FED H 25-13

HANGING ROCK
II-23-41-35

HANGING ROCK
II-23-II-36

HANGING ROCK
II-23-21-36

HANGING ROCK
II-23-41-36

HANGING ROCK
II-23-12-36

OIL SPRINGS FIELD

HANGING ROCK
II-23-23-36

HANGING ROCK
II-23-13-36

HANGING ROCK
FED H 35-15
BHL
35-15

HANGING ROCK
II-23 44-35

HANGING ROCK
II-23-14-36

T12S R23E

HR
3MU-2-12-23

HR
2MU-2-12-23

HANGING
ROCK FED I 1-4
POT OF GOLD I-1

HR
6MU-2-12-23

H R STATE
S 42-2

H R STATE
S 22-2

HANGING ROCK UNIT

OPERATOR: ENDURING RES LLC (N2750)

SEC: 35 T.11S R. 23E

FIELD: OIL SPRINGS (635)

COUNTY: UINTAH

SPACING: R649-3-3 / EXCEPTION LOCATION

Field Status

ABANDONED
ACTIVE
COMBINED
INACTIVE
PROPOSED
STORAGE
TERMINATED

Unit Status

EXPLORATORY
GAS STORAGE
NF PP OIL
NF SECONDARY
PENDING
PI OIL
PP GAS
PP GEOTHERML
PP OIL
SECONDARY
TERMINATED

Wells Status

GAS INJECTION
GAS STORAGE
LOCATION ABANDONED
NEW LOCATION
PLUGGED & ABANDONED
PRODUCING GAS
PRODUCING OIL
SHUT-IN GAS
SHUT-IN OIL
TEMP. ABANDONED
TEST WELL
WATER INJECTION
WATER SUPPLY
WATER DISPOSAL
DRILLING



PREPARED BY: DIANA MASON
DATE: 01-NOVEMBER-2007



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil Gas and Mining

JOHN R. BAZA
Division Director

November 1, 2007

Enduring Resources, LLC
475 17th St., Ste. 1500
Denver, CO 80202

Re: Hanging Rock 11-23-44-35 Well, 644' FSL, 831' FEL, SE SE, Sec. 35, T. 11 South,
R. 23 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann §40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-39748.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal Office



Operator: Enduring Resources, LLC
Well Name & Number Hanging Rock 11-23-44-35
API Number: 43-047-39748
Lease: UTU-73694

Location: SE SE **Sec.** 35 **T.** 11 South **R.** 23 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281 office (801) 733-0983 home

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No 1004-0137
Expires March 31, 2007

APPLICATION FOR PERMIT TO DRILL OR REENTER

5. Lease Serial No. UTU-73694	
6. If Indian, Allottee or Tribe Name N/A	
7. If Unit or CA Agreement, Name and No. N/A	
8. Lease Name and Well No. Hanging Rock 11-23-44-35	
9. API Well No. 43 047 39 748	
1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER	10. Field and Pool, or Exploratory Undesignated
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone	11. Sec., T. R. M. or Blk. and Survey or Area Sec 35 T11S R23E S.L.B.&M.
2. Name of Operator Enduring Resources, LLC	12. County or Parish Uintah
3a. Address 475 17th Street, Suite 1500 Denver, CO 80202	13. State UT
3b. Phone No. (include area code) 303-350-5719	14. Distance in miles and direction from nearest town or post office* 66.7 miles South of Vernal, UT
4. Location of Well (Report location clearly and in accordance with any State requirements.) At surface SESE 644' FSL - 831' FEL At proposed prod. zone Same as surface	15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 644'
16. No. of acres in lease 640	17. Spacing Unit dedicated to this well 40 acres
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 1000' +	19. Proposed Depth 4690'
20. BLM/BIA Bond No. on file BLM - UTB000173	21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5902' RT-KB
22. Approximate date work will start* 06/15/2008	23. Estimated duration 20 days


24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|--|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature 	Name (Printed Typed) Alvin R. (Al) Arlian	Date 10/26/2007
--	---	---------------------------

Title
Landman - Regulatory Specialist

Approved by (Signature) 	Name (Printed Typed) Jessy Kawicka	Date AUG 08 2008
--	--	----------------------------

Title
**Assistant Field Manager
Lands & Mineral Resources**

Office
VERNAL FIELD OFFICE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)

CONDITIONS OF APPROVAL ATTACHED

NOTICE OF APPROVAL

*NOS 7/27/07
07PP 2542A*



**UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE
170 South 500 East VERNAL, UT 84078 (435) 781-4400**



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: Enduring Resources, LLC **Location:** SESE, Sec 35, T11S, R23E
Well No: Hanging Rock 11-23-44-35 **Lease No:** UTU-73694
API No: 43-047-39748 **Agreement:** N/A

Title	Name	Office Phone Number	Cell Phone Number
Petroleum Engineer:	Matt Baker	(435) 781-4490	(435) 828-4470
Petroleum Engineer:	Michael Lee	(435) 781-4432	(435) 828-7875
Petroleum Engineer:	James Ashley	(435) 781-4470	(435) 828-7874
Petroleum Engineer:	Ryan Angus	(435) 781-4430	(435) 828-7368
Supervisory Petroleum Technician:	Jamie Sparger	(435) 781-4502	(435) 828-3913
Supervisory NRS:	Karl Wright	(435) 781-4484	(435) 828-7381
NRS/Enviro Scientist:	Holly Villa	(435) 781-4404	(435) 828-3544
NRS/Enviro Scientist:	James Hereford	(435) 781-3412	
NRS/Enviro Scientist:	Chuck Macdonald	(435) 781-4441	(435) 828-7481
NRS/Enviro Scientist:	Dan Emmett	(435) 781-3414	
NRS/Enviro Scientist:	Paul Percival	(435) 781-4493	
NRS/Enviro Scientist:	Michael Cutler	(435) 781-3401	(435) 828-3546
NRS/Enviro Scientist:	Anna Figueroa	(435) 781-3407	(435) 828-3548
NRS/Enviro Scientist:	Verlyn Pindell	(435) 781-3402	(435) 828-3547
NRS/Enviro Scientist:	Darren Williams	(435) 781-4447	(435) 828-4029
NRS/Enviro Scientist:	Nathan Packer	(435) 781-3405	(435) 828-3545

Fax: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Location Construction (Notify Environmental Scientist)	-	Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	-	Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	-	Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to running casing and cementing all casing strings.
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	-	Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

**SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

General Surface COAs:

- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

Specific Surface COAs:

This well is located within the Resource Development Group (RDG) EIS project boundary, any **additional mitigation or COA's approved in the Final RDG EIS Record of Decision are also applicable to approval of this proposed action.**

Mitigation

Threatened and Endangered Fish Mitigation for Water Supply

- The best method to avoid entrainment is to pump from an off-channel location – one that does not connect to the river during high spring flows. An infiltration gallery constructed in a BLM and Service approved location is best.
- If the pump head is located in the river channel where larval fish are known to occur, the following measures apply:
 - do not situate the pump in a low-flow or no-flow area as these habitats tend to concentrate larval fishes;
 - limit the amount of pumping, to the greatest extent possible, during that period of the year when larval fish may be present (see above); and
 - limit the amount of pumping, to the greatest extent possible, during the pre-dawn hours as larval drift studies indicate that this is a period of greatest daily activity.
- Screen all pump intakes with ¼" mesh material.
- Report any fish impinged on the intake screen to the Service (801.975.3330) and the Utah Division of Wildlife Resources:

Northeastern Region
152 East 100 North, Vernal, UT 84078
Phone: (435) 781-9453

Conditions of Approval:

- If Uinta Basin hookless cactus, White River beardtongue, Graham's beardtongue or other special status plants are found, construction shall cease and the AO shall be notified to determine the appropriate mitigation.
- The operator shall control noxious weeds along access road use authorizations, pipeline route authorizations, rights-of-way, well sites, or other applicable facilities by spraying or mechanical removal. A list of noxious weeds may be obtained from the BLM weeds specialist or the appropriate County Extension Office. On BLM administered land, it is required that a Pesticide Use Proposal (PUP) be submitted and approved prior to the application of herbicides, pesticides or possibly hazardous chemicals.
- No vehicle travel, construction or routine maintenance activities shall be performed during periods when the soil is too wet to adequately support vehicles and/or construction equipment. If such equipment creates ruts in excess of four inches deep, the soil shall be deemed too wet to adequately support construction equipment.
- The authorized officer may prohibit surface disturbing activities during severe winter, wet, or muddy conditions to minimize watershed damage. This limitation does not apply to operation and maintenance of producing wells.
- The access road shall be crowned and ditched. Flat-bladed roads are not allowed.
- If additional erosion occurs during the life of this project, more culverts, low water crossings, berms, wing ditches or etc. shall be needed to control the erosion. Low-water crossings shall be appropriately constructed to avoid sedimentation of drainage ways and other water resources.
- Pipelines shall be buried at all major drainage crossings.
- Prevent fill and stock piles from entering drainages.
- The reserve pit shall be lined with **16 ml** or greater liner to prevent pit leakage and at least **one felt liner (double felt as need to prevent pit leakage) prior to spudding**.
- All open pits shall be properly fenced and maintained during operations and until the pits are backfilled. When the reserve pit contains fluids or toxic substances, the operator must ensure that animals do not ingest or become entrapped in pit fluids.
- The reserve pit shall be free of oil and other liquids and solid wastes, allowed to dry, be pumped dry, or solidified in-situ prior to backfilling. The reserve pit must not be "squeezed", (filled with soil while still containing fluids) or cut (puncturing the pit liner while still containing fluids to allow pit fluids to drain from the pit).
- The pit liner is to be cut 5 feet below ground surface or at the level of the cuttings, whichever is deeper, and the excess liner material is to be disposed of at an authorized disposal site.
- All permanent facilities, not regulated by OSHA, shall be painted the same color, **Covert Green**; within six months of installation.
- During construction the topsoil from the location shall be stripped and windrowed separately from the other excess material. The topsoil windrows shall be re-seeded using the interim seed mix and track walked or drag chained at the time the location is constructed. The topsoil removed

from the pit area shall be stored separately and will not be re-seeded until the pit is reclaimed. When the reserve pit is closed, it shall be re-contoured and the topsoil re-spread, and the area shall be seeded using the interim seed mix listed below.

- Upon well completion, the well pad location up to the deadmen, shall be recontoured to the approximate natural contours and the stockpiled topsoil shall be spread evenly over the reclaimed area and then re-seeded using the interim seed mix.

Reclamation:

Interim seed mix:

Hy-crest Crested Wheatgrass	<i>Agropyron cristatum</i>	6 lbs/acre
Western Wheatgrass	<i>Agropyron smithii</i>	6 lbs/acre

Final reclamation seed mix:

Hy-crest Crested Wheatgrass	<i>Agropyron cristatum</i>	6 lbs/acre
Western Wheatgrass	<i>Agropyron smithii</i>	6 lbs/acre

All pounds are in pure live seed.

- Seeding will take place from August 15 until the ground freezes in the fall or early winter.
 - All seed and mulch shall be certified weed free.
 - Drill seeding is the required method unless topography will not allow.
 - Rates are set for drill seeding; double the rate if broadcasting.
 - If broadcasting seed: The seed shall be walked into the soil with a dozer immediately after the seeding is completed, or covered by soil using a drag chain.
 - Reseeding shall be required if initial seeding is not successful.
- Once the location is plugged and abandoned, the well location and access road shall be recontoured to the natural topography, topsoil shall be respread, and the entire location and access road shall be seeded with the final reclamation seed mix. Seed application shall follow all guidelines in the final reclamation seed mix bullet statement above. If reclamation seeding shall take place using the broadcast method, the seed at a minimum shall be walked into the soil with a dozer, immediately after the seeding is completed, or covered by soil using a drag chain.
 - No construction, drilling, or fracing operations within crucial mule deer wintering habitat from Jan 1 to March 1.
 - No construction, drilling, or fracing operations within 0.5 miles of golden eagle nest from Feb 1 to July 15.
 - Reserve Pit will be shortened by approximately 60 feet on the east and southeast corner of the pit to keep away from the edge. That corner will be rounded.

DOWNHOLE CONDITIONS OF APPROVAL

SITE SPECIFIC DOWNHOLE CONDITIONS OF APPROVAL

- Production casing cement top shall be a minimum of 200' above the surface casing shoe.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.

- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at

a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

CONFIDENTIAL

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-73694
2. NAME OF OPERATOR: Enduring Resources, LLC		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: 475 17th Street, Suite 1500 CITY Denver STATE CO ZIP 80202		7. UNIT or CA AGREEMENT NAME:
4. LOCATION OF WELL FOOTAGES AT SURFACE: 644' FSL - 831' FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SESE 35 11S 23E S		8. WELL NAME and NUMBER: Hanging Rock 11-23-44-35
		9. API NUMBER: 4304739748
		10. FIELD AND POOL, OR WILDCAT: Undesignated
		COUNTY: Uintah
		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Request for APD Extension</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Enduring Resources, LLC respectfully request an extension to the expiration date of this Application for Permit to Drill

FROM: 11/1/2008
TO: 11/1/2009

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 11-03-08
By: [Signature]

NAME (PLEASE PRINT) <u>Alvin R. (Al) Arlian</u>	TITLE <u>Landman</u>
SIGNATURE <u>[Signature]</u>	DATE <u>10/20/2008</u>

(This space for State use only)

COPY SENT TO OPERATOR
Date: 11.10.2008
Initials: KS

(See Instructions on Reverse Side)

RECEIVED
NOV 03 2008
DIV. OF OIL, GAS & MINING



**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304739748
Well Name: Hanging Rock 11-23-44-35
Location: 644' FSL - 831' FEL , SESE, Sec 35, T11S-R23E
Company Permit Issued to: Enduring Resources, LLC
Date Original Permit Issued: 11/1/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No


Signature

10/20/2008
Date

Title: Administrative Assistant

Representing: Enduring Resources, LLC

RECEIVED
NOV 03 2008
DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-73694
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: HANGING ROCK 11-23-44-35
2. NAME OF OPERATOR: Enduring Resources, LLC	9. API NUMBER: 43047397480000
3. ADDRESS OF OPERATOR: 475 17th Street, Suite 1500 , Denver, CO, 80202	PHONE NUMBER: 303 350-5114 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0644 FSL 0831 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESE Section: 35 Township: 11.0S Range: 23.0E Meridian: S	9. FIELD and POOL or WILDCAT: OIL SPRINGS COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 11/3/2009	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: _____

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Request for an one-year extension to APD term.

Approved by the Utah Division of Oil, Gas and Mining

Date: November 03, 2009

By: 

NAME (PLEASE PRINT) Alvin Arlian	PHONE NUMBER 303 350-5114	TITLE Landman-Regulatory
SIGNATURE N/A		DATE 11/3/2009



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047397480000

API: 43047397480000

Well Name: HANGING ROCK 11-23-44-35

Location: 0644 FSL 0831 FEL QTR SESE SEC 35 TWP 110S RNG 230E MER S

Company Permit Issued to: ENDURING RESOURCES, LLC

Date Original Permit Issued: 11/1/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Alvin Arlian

Date: 11/3/2009

Title: Landman-Regulatory **Representing:** ENDURING RESOURCES, LLC

Date: November 03, 2009

By: 

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-73694
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: HANGING ROCK 11-23-44-35
2. NAME OF OPERATOR: Enduring Resources, LLC	9. API NUMBER: 43047397480000
3. ADDRESS OF OPERATOR: 475 17th Street, Suite 1500 , Denver, CO, 80202	PHONE NUMBER: 303 350-5114 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0644 FSL 0831 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESE Section: 35 Township: 11.0S Range: 23.0E Meridian: S	9. FIELD and POOL or WILDCAT: OIL SPRINGS COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 11/1/2010	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Request for an one-year extension to the APD termination date.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: November 01, 2010

By: 

NAME (PLEASE PRINT) Alvin Arlian	PHONE NUMBER 303 350-5114	TITLE Landman-Regulatory
SIGNATURE N/A		DATE 10/29/2010



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047397480000

API: 43047397480000

Well Name: HANGING ROCK 11-23-44-35

Location: 0644 FSL 0831 FEL QTR SESE SEC 35 TWP 110S RNG 230E MER S

Company Permit Issued to: ENDURING RESOURCES, LLC

Date Original Permit Issued: 11/1/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Alvin Arlian

Date: 10/29/2010

Title: Landman-Regulatory **Representing:** ENDURING RESOURCES, LLC

Date: November 01, 2010

By: 

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-73694
SUNDRY NOTICES AND REPORTS ON WELLS		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well		8. WELL NAME and NUMBER: HANGING ROCK 11-23-44-35
2. NAME OF OPERATOR: Enduring Resources, LLC		9. API NUMBER: 43047397480000
3. ADDRESS OF OPERATOR: 511-16th Street, Suite 700 , Denver, CO, 80202	PHONE NUMBER: 303 350-5114 Ext	9. FIELD and POOL or WILDCAT: OIL SPRINGS
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0644 FSL 0831 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESE Section: 35 Township: 11.0S Range: 23.0E Meridian: S		COUNTY: UINTAH
		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 11/1/2011 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	
	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.		
Request for an one-year extension of APD expiration date.		
<p style="color: red; font-weight: bold;">Approved by the Utah Division of Oil, Gas and Mining</p> <p style="color: red; font-weight: bold;">Date: <u>11/01/2011</u></p> <p style="color: red; font-weight: bold;">By: <u></u></p>		
NAME (PLEASE PRINT) Alvin Arlian	PHONE NUMBER 303 350-5114	TITLE Landman-Regulatory
SIGNATURE N/A	DATE 10/28/2011	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047397480000

API: 43047397480000

Well Name: HANGING ROCK 11-23-44-35

Location: 0644 FSL 0831 FEL QTR SESE SEC 35 TWNP 110S RNG 230E MER S

Company Permit Issued to: ENDURING RESOURCES, LLC

Date Original Permit Issued: 11/1/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Alvin Arlian

Date: 10/28/2011

Title: Landman-Regulatory **Representing:** ENDURING RESOURCES, LLC



GARY R. HERBERT
Governor

GREG BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

November 9, 2012

Al Arlian
Enduring Resources, LLC
511-16TH Street Ste. 700
Denver, CO 80202

Re: APD Rescinded – Hanging Rock 11-23-44-35, Sec. 35, T. 11S, R. 23E,
Uintah County, Utah, API No. 43-047-39748


Dear Mr. Arlian:

The Application for Permit to Drill (APD) for the subject well was approved by the Division of Oil, Gas and Mining (Division) on November 1, 2007. On November 3, 2008, November 3, 2009, November 1, 2010 and November 11, 2011 the Division granted a one-year APD extension. On November 5, 2012, you requested that the division rescind the state approved APD. No drilling activity at this location has been reported to the division. Therefore, approval to drill the well is hereby rescinded, effective November 5, 2012.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal



United States Department of the Interior



BUREAU OF LAND MANAGEMENT

Green River District
Vernal Field Office
170 South 500 East
Vernal, UT 84078

<http://www.blm.gov/ut/st/en/fo/vernal.html>

June 13, 2013

IN REPLY REFER TO:
3160 (UTG011)

Al Arlian
Enduring Resources LLC
511 16th Street, Suite 700
Denver, CO 80202

43 047 39748

Re: Notice of Expiration
Well No. Hanging Rock 11-23-44-35
SESE, Sec. 35, T11S, R23E
Uintah County, Utah
Lease No. UTU-73694

Dear Mr. Arlian:

The Application for Permit to Drill (APD) for the above-referenced well was approved on August 8, 2008. A two (2) year extension of the original APD was requested. The request was reviewed and not approved. The APD expired on August 8, 2010. According to our records, no known activity has transpired at the approved location. In view of the foregoing, this office is notifying you that the approval of the referenced application has expired. If you intend to drill at this location in the future, a new Application for Permit to Drill must be submitted.

This office requires a letter confirming that no surface disturbance has been made for this drill site. Any surface disturbance associated with the approved location of this well is to be rehabilitated. A schedule for this rehabilitation must be submitted to this office. Your cooperation in this matter is appreciated.

If you have any questions regarding this matter, please contact Robin R. Hansen at (435) 781-3428.

Sincerely,

/s/ Jerry Kenczka

Jerry Kenczka
Assistant Field Manager
Lands & Mineral Resources

cc: UDOGM

bcc: Well File
I&E Asst.

RECEIVED
JUN 18 2013
DIV. OF OIL, GAS & MINING