



September 1, 2006

Bureau of Land Management
Vernal Field Office
170 S. 500 E.
Vernal, UT 84078

Attn: Minerals Department

Re: All Wells
Uintah and Duchesne Counties, Utah

Ladies and Gentlemen:

This letter is to inform you that Permitco, Inc. and Shon McKinnon are authorized to act as Agent and to sign or retrieve documents on behalf of Gasco Production Company, a wholly owned subsidiary of Gasco Energy, Inc. when necessary for filing county, state and federal permits including Onshore Order No. 1, Right of Way applications, etc., for the above mentioned wells.

It should be understood that Permitco, Inc. and Shon McKinnon are acting as Agent only in those matter stated above and are not responsible for drilling, completion, production or compliance with regulations.

Gasco Production Company agrees to accept full responsibility for operations conducted in order to drill, complete and produce the above mentioned wells.

Yours very truly,

Mark A. Erickson
President and CEO



14421 County Rd. 10 • Ft. Lupton, Colorado 80621 • (303) 857-9999 • FAX (303) 857-0577 • E-MAIL Permitco 1@aol.com

November 28, 2007

Division of Oil, Gas & Mining
1594 West North Temple, Suite 1210
Box 145801
Salt Lake City, UT 84114-5801
Attn: Minerals

Re: **Gasco Production Company**
Federal #21-17-9-19
751' FNL and 1781' FWL
NE NW Section 17, T9S - R19E
Uintah County, Utah

Gentlemen:

Enclosed please find one copy of the Application for Permit to Drill, along with one copy of the Onshore Order No. 1 which was filed with the BLM in Vernal, Utah.

If you should need additional information, please don't hesitate to contact me. Approved copies of the A.P.D. should be sent to Permitco Inc. at the address shown above.

Sincerely,

PERMITCO INC.

Venessa Langmacher
Consultant for
Gasco Production Company

Enc.

cc: **Gasco Production Company - Englewood, CO**
Shawn Elworthy - Myton, UT
Shon McKinnon - Altamont, UT

RECEIVED
DEC 03 2007
DIV. OF OIL, GAS & MINING

AMENDED REPORT
(highlight changes)

APPLICATION FOR PERMIT TO DRILL		5. MINERAL LEASE NO.: UTU-0017991	6. SURFACE: BLM
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>		7. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>		8. UNIT or CA AGREEMENT NAME: N/A	
2. NAME OF OPERATOR: Gasco Production Company		9. WELL NAME and NUMBER: Federal #21-17-9-19	
3. ADDRESS OF OPERATOR: 8 Inverness Drive East, Suite 100, Englewood, Co 80112		PHONE NUMBER: 303-483-0044	10. FIELD AND POOL, OR WILDCAT: WILDCAT Darietta Beach
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 601 813X AT PROPOSED PRODUCING ZONE: 44322344		11. QTR/QTR, SECTION, TOWNSHIP, RANGE MERIDIAN: Section 17, T9S - R19E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: Approximately 25.4 miles Southeast of Myton, UT.		12. COUNTY: Uintah	13. STATE: UT
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET): 751'	16. NUMBER OF ACRES IN LEASE: 520	17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 40 Acres	
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET): None	19. PROPOSED DEPTH: 13,245'	20. BOND DESCRIPTION: Bond #UT-1233	
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 4747' GL	22. APPROXIMATE DATE WORK WILL START: Upon Approval	23. ESTIMATED DURATION: 20 Days	

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT	SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT
17-1/2"	13-3/8", H40, 48#	40'	50 sx Premium Type 5, 15.6 ppg, 1.18 yield
12-1/4"	8-5/8", J-55, 32#	3,553'	596 sx Hi-Lift, 11 ppg, 3.91 yield + 185 sx 10-2 RFC, 14.2 ppg, 1.63 yield
7-7/8"	4-1/2", P110, 13.5#	13,109'	523 sx Hi-Lift, 11.5 ppg, 3.05 yield + 1358 sx 50-50 Poz, 14.1 ppg, 1.28 yield

ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:

- | | |
|--|--|
| <input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER | <input checked="" type="checkbox"/> COMPLETE DRILLING PLAN |
| <input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER | <input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER |


AGENT: **PermitCo Inc., 14421 County Road 10, Fort Lupton, CO 80621** AGENT'S PHONE NO.: **303/857-9999**
 NAME (PLEASE PRINT) **Venessa Langmacher** TITLE **Agent for Gasco Production Company**
 SIGNATURE *Venessa Langmacher* DATE **November 28, 2007**

(This space for State use only)

API NUMBER ASSIGNED: **43047-39801**

Approved by the
Utah Division of
Oil, Gas and Mining


CONFIDENTIAL



Date: **12-06-07**
(See instructions on Reverse Side)
By: *[Signature]*

T9S, R19E, S.L.B.&M.

1991 Brass Cap
0.4' High, Pile
of Stones

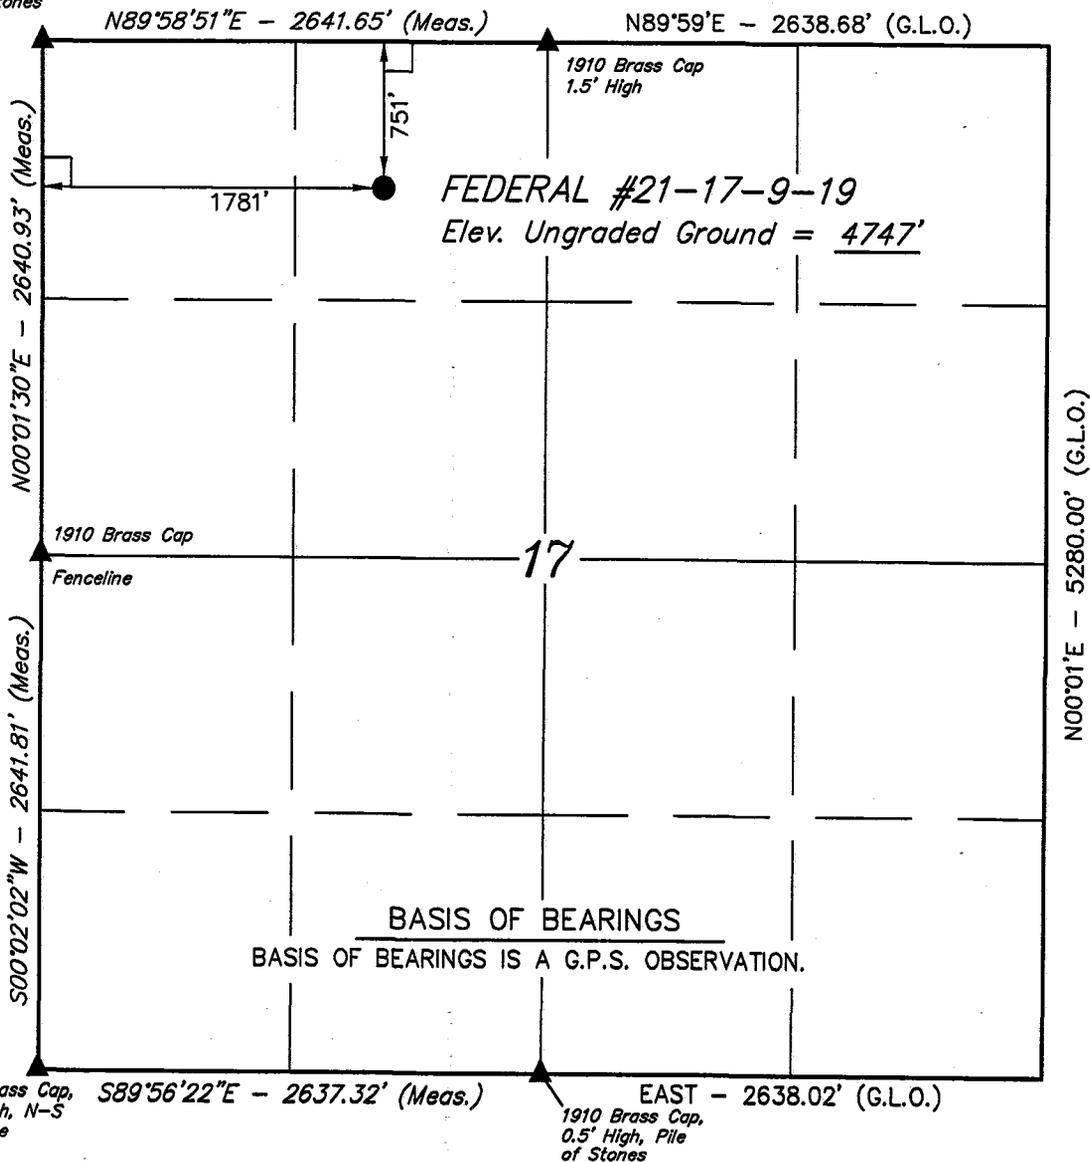


GASCO PRODUCTION COMPANY

Well location, FEDERAL #21-17-9-19, located as shown in the NE 1/4 NW 1/4 of Section 17, T9S, R19E, S.L.B.&M., Uintah County, Utah.


BASIS OF ELEVATION

SPOT ELEVATION AT THE NORTHEAST CORNER OF SECTION 21, T9S, R19E, S.L.B.&M. TAKEN FROM THE UTELAND BUTTE QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4711 FEET.

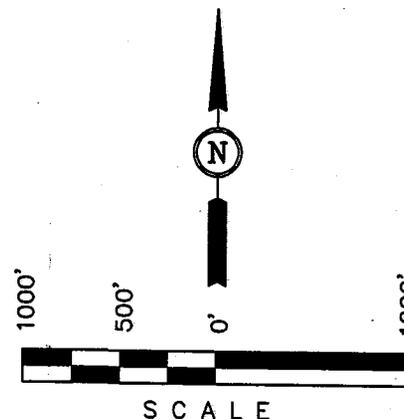

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

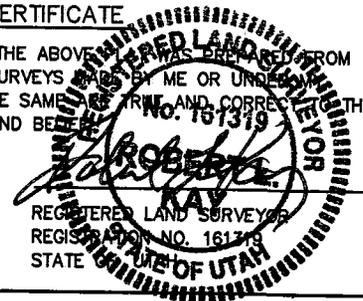

UINTAH ENGINEERING & LAND SURVEYING

85 SOUTH 200 EAST - VERNAL, UTAH 84078

(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 06-15-07	DATE DRAWN: 07-11-07
PARTY J.W. Q.B. C.H.	REFERENCES G.L.O. PLAT	
WEATHER HOT	FILE GASCO PRODUCTION COMPANY	

LEGEND:

└─┘ = 90° SYMBOL

● = PROPOSED WELL HEAD.

▲ = SECTION CORNERS LOCATED.

(AUTONOMOUS NAD 83)

LATITUDE = 40°02'09.93" (40.036092)

LONGITUDE = 109°48'26.60" (109.807389)

(AUTONOMOUS NAD 27)

LATITUDE = 40°02'10.06" (40.036128)

LONGITUDE = 109°48'24.09" (109.806692)

Gasco Production Company

Federal #21-17-9-19

Lease No. UTU-0017991

751' FNL and 1781' FWL

NE NW Section 17, T9S - R19E

DRILLING PROGRAM

Uintah County, Utah

Page 1

ONSHORE OIL & GAS ORDER NO. 1
Approval of Operations on Onshore
Federal and Indian Oil and Gas Leases

All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas Order No. 1, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

A. ESTIMATED TOPS OF ALL GEOLOGIC GROUPS, FORMATIONS, MEMBERS, OR ZONES

<i>Formation</i>	<i>Depth</i>	<i>Subsea</i>
Wasatch	5,695'	-920'
Mesaverde	9,555'	-4,780'
Castlegate	12,010'	-7,235'
Blackhawk	12,195'	-7,420'
Spring Canyon	12,945'	-8,170'
TD	13,245'	-8,470'

B. ESTIMATED DEPTH AND THICKNESS OF WATER, OIL, GAS AND OTHER MINERAL ZONES

<i>Substance</i>	<i>Formation</i>	<i>Depth</i>	<i>Thickness</i>
Gas	Wasatch	5,800' - 9,555'	3,755'
Gas	Mesaverde	9,555' - 12,010'	2,455'
Gas	Blackhawk	12,195' - 13,145'	950'

All fresh water prospectively valuable minerals encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.



C. SPECIFICATIONS FOR BLOWOUT PREVENTION EQUIPMENT AND DIVERTER SYSTEMS

Gasco Production Company's minimum specifications for pressure control equipment are as follows:

Ram Type: 11" Hydraulic double with annular, 5000 psi w.p.

Ram type preventers and associated equipment shall be tested to approved stack working pressure if isolated by test plug or to 70 percent of internal yield pressure of casing. Pressure shall be maintained for at least 10 minutes or until requirements of test are met, whichever is longer. If a test plug is utilized, no bleed-off pressure is acceptable. For a test not utilizing a test plug, if a decline in pressure of more than 10 percent in 30 minutes occurs, the test shall be considered to have failed. Valve on casing head below test plug shall be open during test of BOP stack.

Annular type preventers (if used) shall be tested to 50 percent of rated working pressure. Pressure shall be maintained at least 10 minutes or until provisions of test are met, whichever is longer.

As a minimum, the above test shall be performed:

1. when initially installed;
2. whenever any seal subject to test pressure is broken
3. following related repairs; and
4. at 30-day intervals

Valves shall be tested from working pressure side during BOPE tests with all down stream valves open.

When testing the kill line valve(s) the check valve shall be held open or the ball removed.

Annular preventers shall be functionally operated at least weekly.

Pipe and blind rams shall be activated each trip, however, this function need not be performed more than once a day.

A BOPE pit level drill shall be conducted weekly for each drilling crew.

Pressure tests shall apply to all related well control equipment.

All of the above described tests and/or drills shall be recorded in the drilling log.



Gasco Production Company

Federal #21-17-9-19

Lease No. UTU-0017991

751' FNL and 1781' FWL

NE NW Section 17, T9S - R19E

DRILLING PROGRAM

Uintah County, Utah

Page 3

BOP systems shall be consistent with API RP53. Pressure tests will be conducted before drilling out from under casing strings which have been set and cemented in place. Blowout preventer controls will be installed prior to drilling the surface casing plug and will remain in use until the well is completed or abandoned. Preventers will be inspected and operated at least daily to ensure good mechanical working order, and this inspection will be recorded on the daily drilling report. Preventers will be pressure tested before drilling casing cement plugs.

The District Office should be notified, with sufficient lead time, in order to have the BLM representative on location during pressure testing.

1. The size and rating of the BOP stack is shown on the attached diagram. Although a rig has not been chosen to drill this well, most of the equipment for this depth of hole in the area use a 11", 5000 psi working pressure blowout preventor.
2. A choke line and a kill line are to be properly installed. The kill line is not to be used as a fill-up line.
3. The accumulator system shall have a pressure capacity to provide for repeated operation of hydraulic preventers.
4. Drill string safety valve(s), to fit all tools in the drill string, are to be maintained on the rig floor while drilling operations are in progress.

D. PROPOSED CASING PROGRAM

1. The proposed casing and cementing program shall be conducted as approved to protect and/or isolate all usable water zones, potentially productive zones, lost circulation zones, abnormally pressured zones, and any prospectively valuable deposits of minerals. Any isolating medium other than cement shall receive approval prior to use. The casing setting depth shall be calculated to position the casing seat opposite a competent formation which will contain the maximum pressure to which it will be exposed during normal drilling operations. Determination of casing setting depth shall be based on all relevant factors, including; presence/absence of hydrocarbons; fracture gradients; usable water zones; formation pressures; lost circulation zones; other minerals; or other unusual characteristics. All indications of usable water shall be reported.



2. Casing design shall assume formation pressure gradients of 0.44 to 0.50 psi per foot for exploratory wells (lacking better data).
3. Casing design shall assume fracture gradients from 0.70 to 1.00 psi per foot for exploratory wells (lacking better data)
4. Casing collars shall have a minimum clearance of 0.422 inches of all sides in the hole/casing annulus, with recognition that variances can be granted for justified exceptions.
5. All waiting on cement times shall be adequate to achieve a minimum of 500 psi compressive strength at the casing shoe prior to drilling out.
6. All casing except the conductor casing, shall be new or reconditioned and tested used casing that meets or exceeds API standards for new casing.
7. The surface casing shall be cemented back to surface either during the primary cement job or by remedial cementing.
8. All indications of usable water shall be reported to the authorized officer prior to running the next string of casing or before plugging orders are requested, whichever occurs first.
9. Three centralizers will be run on the bottom three joints of surface casing with a minimum of one centralizer per joint starting with the shoe joint.
10. Top plugs shall be used to reduce contamination of cement by displacement fluid. A bottom plug or other acceptable technique, such as a suitable preflush fluid, inner string cement method, etc. shall be utilized to help isolate the cement from contamination by the mud fluid being displaced ahead of the cement slurry.
11. All casing strings below the conductor shall be pressure tested to 0.22 psi per foot of casing string length or 1500 psi, whichever is greater, but not to exceed 70 percent of the minimum internal yield. If pressure declines more than 10 percent in 30 minutes, corrective action shall be taken.



12. On all exploratory wells, and on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
13. The proposed casing program will be as follows:

<i>Purpose</i>	<i>Depth</i>	<i>Hole Size</i>	<i>O.D.</i>	<i>Weight</i>	<i>Grade</i>	<i>Type</i>	<i>New/Used</i>
Conductor	0'-40'	17-1/2"	13-3/8"	48#	H-40	---	New
Surface	0'-3,593'	12-1/4"	8-5/8"	32#	J-55	ST&C	New
Production	0'-13,245'	7-7/8"	4-1/2"	13.5#	P-110	LT&C	New

14. Casing design subject to revision based on geologic conditions encountered.

E. PROPOSED CEMENTING PROGRAM

<i>Conductor</i>	<i>Type and Amount</i>
TOC @ Surface	50 sx Premium Type 5, 15.6 ppg, 1.18 yield
<i>Surface</i>	<i>Type and Amount</i>
TOC @ Surface	Lead: 604 sx Hi-Lift, 11 ppg, 3.91 cu.ft./ft, Tail: 185 sx 10-2 RFC, 14.2 ppg, 1.63 yield
<i>Production</i>	<i>Type and Amount</i>
TOC @ 2,500'	Lead: 523 sx Hi-Lift, 11.5 ppg, 3.05 cu.ft./ft, Tail: 1390 sx 50:50 Poz, 14.1 ppg, 1.28 cu.ft./ft

1. Anticipated cement tops will be reported as to depth; not the expected number of sacks of cement to be used. The District Office should be notified, with sufficient lead time, in order to have a BLM representative on location while running all casing strings and cementing.



Gasco Production Company

Lease No. UTU-0017991

Federal #21-17-9-19

751' FNL and 1781' FWL

NE NW Section 17, T9S - R19E

DRILLING PROGRAM

Uintah County, Utah

Page 6

2. After cementing but before commencing any test, the casing string shall stand cemented until the cement has reached a compressive strength of at least 500 psi at the shoe. WOC time shall be recorded in the driller's log.
3. The following reports shall be filed with the District Manager within 30 days after the work is completed.
 - a. Progress reports, Form 3160-5 (formerly 9-331) "Sundry Notices and Reports on Wells", must include complete information concerning:
 1. Setting of each string of casing, showing the size, grade, weight of casing set, hole-size, setting depth, amounts and type of cement used, whether cement circulated or the top of the cement behind the casing, depth of cementing tools used, casing test method and results, and the date work was done. Show the spud date on the first reports submitted.
 2. Temperature or bond logs must be submitted for each well where the casing cement was not circulated to the surface.
4. Auxiliary equipment to be used is as follows:
 - a. Kelly cock
 - b. No bit float is deemed necessary.
 - c. A sub with a full opening valve.

F. PROPOSED CIRCULATING MEDIUM OR MEDIUMS

<i>Interval</i>	<i>Mud Type</i>	<i>Mud Wt.</i>	<i>Visc.</i>	<i>F/L</i>	<i>pH</i>
0 - 40'	Fresh Water	8.33	1	---	7
40' - 3,593'	Fresh Water	8.33	1	---	7-8
3,593' - TD	Fresh Water & DAP	9.0-11.5	30-40	12-20	8

There will be sufficient mud on location to control a blowout should one occur.



Gasco Production Company

Federal #21-17-9-19

Lease No. UTU-0017991

751' FNL and 1781' FWL

NE NW Section 17, T9S - R19E

DRILLING PROGRAM

Uintah County, Utah

Page 7

A mud test shall be performed every 24 hours after mudding up to determine, as applicable: density, viscosity, gel strength, static filtration loss, and Ph.

1. Mud monitoring equipment to be used is as follows:
 1. Periodic checks will be made each tour of the mud system. The mud level will be checked visually.
 2. No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.
 3. No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.
 4. The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

G. PROPOSED TESTING, LOGGING, AND CORING

1. No drill stem tests are anticipated, however, if DST's are run, the following requirements will be adhered to:

Initial opening of drill stem test tools shall be restricted to daylight hours unless specific approval to start during other hours is obtained from the authorized officer. However, DST's may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e. lighting which is adequate for visibility and vapor-proof for safe operations). Packers can be released, but tripping shall not begin before daylight, unless prior approval is obtained from the authorized officer. Closed chamber DSTs may be accomplished day or night.

A DST that flows to the surface with evidence of hydrocarbons shall be either reversed out of the testing string under controlled surface conditions. This would involve provided some means for reverse circulation.



Separation equipment required for the anticipated recovery shall be properly installed before a test starts.

All engines within 100 feet of the wellbore that are required to "run" during the test shall have spark arresters or water cooled exhausts.

2. The logging program will consist of: Schlumberger Platform Express or equivalent from Base of Surface Casing to TD.
3. No cores are anticipated.
4. Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. Two copies of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with form 3160-4. Samples (cutting, fluids, and/or gases) will be submitted when requested by the authorized officer (AO).
5. The anticipated completion program is as follows: Perform multistage fracs and complete all productive Blackhawk, Mesaverde and Wasatch zones present in wellbore. Produce all zones commingled.
6. Daily drilling and completion progress reports shall be submitted to the BLM in Vernal on a weekly basis.

H. EXPECTED BOTTOM HOLE PRESSURE

1. The expected bottom hole pressure is 7947 psi. The maximum bottom hole temperature anticipated is 238.41 degrees F.
2. No Hydrogen Sulfide Gas is anticipated.



Gasco Production Company

Federal #21-17-9-19

Lease No. UTU-0017991

751' FNL and 1781' FWL

NE NW Section 17, T9S - R19E

DRILLING PROGRAM

Uintah County, Utah

Page 9

I. OTHER INFORMATION AND NOTIFICATION REQUIREMENTS

1. Drilling is planned to commence on upon approval of this application.
2. It is anticipated that the drilling of this well will take approximately 20 days.
3. The BLM in Vernal, Utah shall be notified of the anticipated date of location construction commencement and of anticipated spud date.
4. No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.
5. The spud date will be reported orally to the AO within 48 hours after spudding. If the spudding occurs on a weekend or holiday, the report will be submitted on the following regular work day. The oral report will be followed up with a Sundry Notice.
6. In accordance with Onshore Oil and Gas Order No. 1, this well will be reported on Form 3160-6 "Monthly Report of Operations", starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report will be filed with the Vernal BLM District Office, 170 South 500 East, Vernal, UT 84078.
7. Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.
8. If a replacement rig is contemplated for completion operations, a "Sundry Notice" Form 3160-5 to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.
9. Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Such notification will be sent by telegram or other written communications, not later than 5 days following the date on which the well is placed on production.
10. Pursuant to Onshore Order No. 7, with the approval of the District Engineer, produced water may be temporarily disposed of into unlined pits for a period of up to 90 days. During the




period so authorized, an application for approval of the permanent disposal method, along with the required water analysis and other information, must be submitted to the District Engineer.

11. Pursuant to NTL-4A, lessees or operators are authorized to vent/flare gas during initial well evaluation tests, not exceeding a period of 30 days or the production of 50 MMCF of gas, whichever occurs first. An application must be filed with the District Engineer and approval received, for any venting/flaring of gas beyond the initial 30 day or authorized test period.
12. A schematic facilities diagram as required by 43 CFR 3162.7-5 (b.9.d.), shall be submitted to the appropriate District Office within sixty (60) days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (b.4.).
13. A first production conference will be scheduled within 15 days after receipt of the first production notice.
14. No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the SO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within 30 days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.
15. Pursuant to Onshore Oil and Gas Order No. 1, lessees and operators have the responsibility to see that their exploration, development, production, and construction operations are conducted in a manner which conforms with applicable Federal laws and regulations and with State and local laws and regulations to the extent that such State and local laws are applicable to operations on Federal or Indian lands.


Bureau of Land Management 170 South 500 East Vernal, Utah 84078		
Phone: 435/781-4400		Fax: 435/781-4410
After Hours:		
Michael Lee	Petroleum Engineer	435/828-4470
Matt Baker	Petroleum Engineer	435/828-7875



BOP SCHEMATIC
5000 PSI WORKING PRESSURE

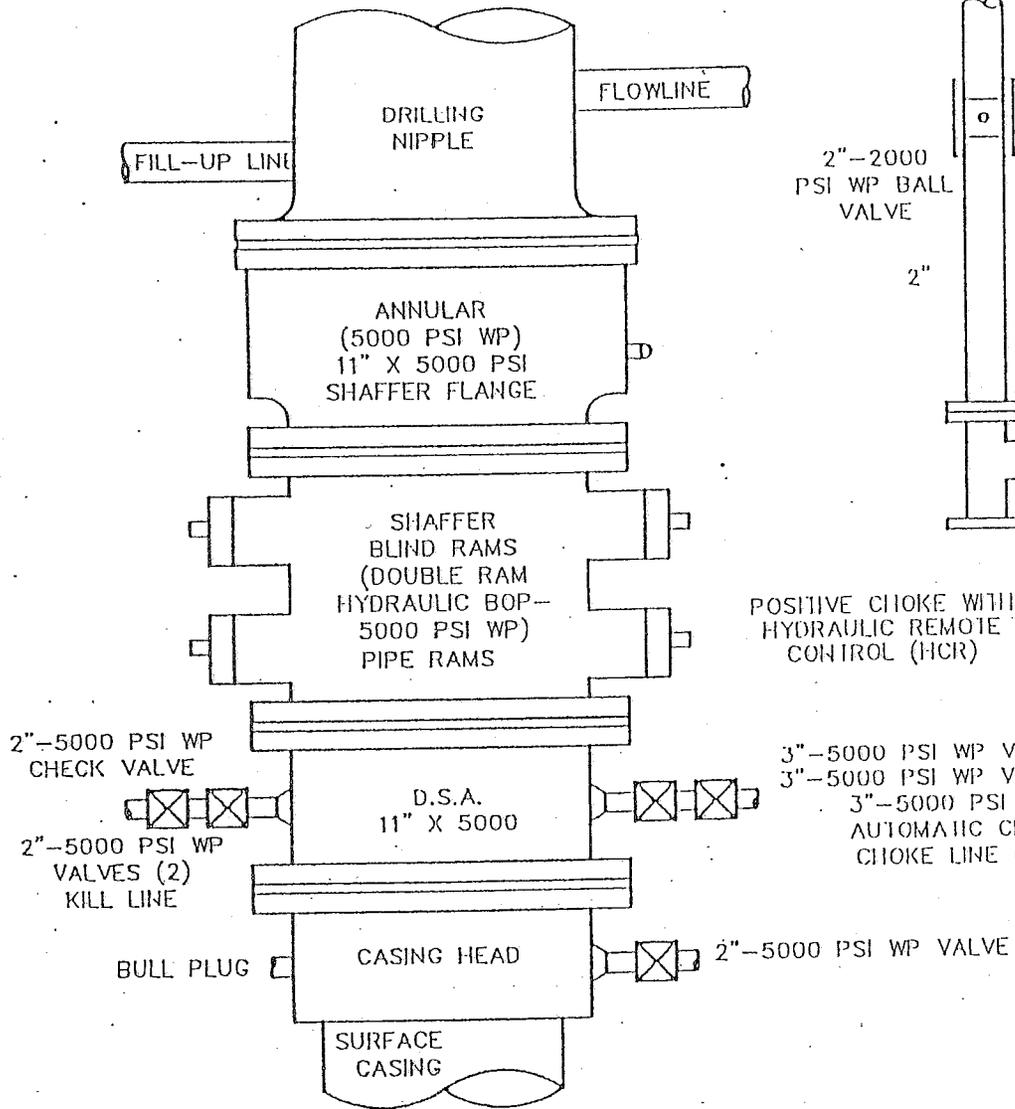

PLAN VIEW CHIOKE MANIFOLD

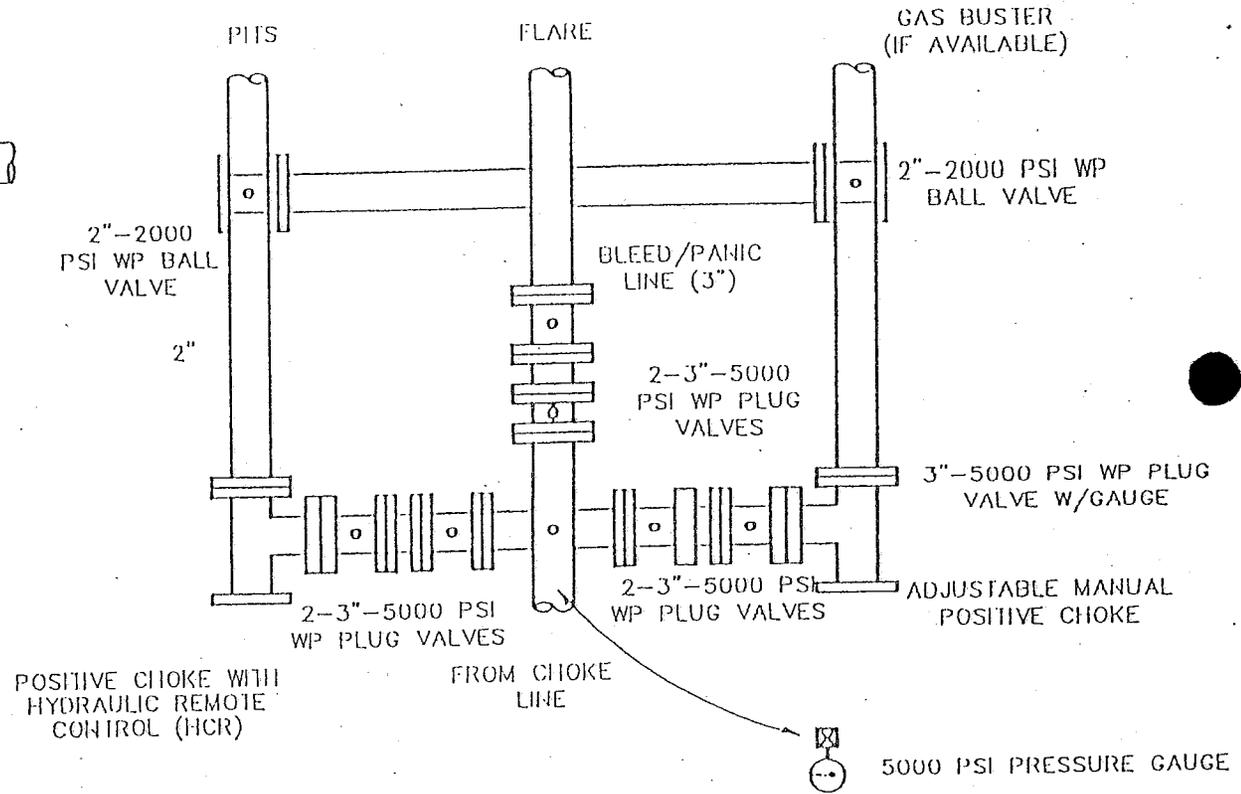

THE HYDRAULIC CLOSING UNIT WILL BE LOCATED MORE THAN 30' FROM THE WELLHEAD. CHIOKE AND BLEED/PANIC LINES WILL GO TO THE PIT AND FLARE. ALL CONNECTIONS IN CHIOKE LINES AND MANIFOLD WILL BE FLANGED OR WELDED. ALL FLANGES SHOULD BE RING JOINT GASKET TYPE. ALL TURNS IN LINES SHALL BE CONSTRUCTED USING TARGETING 90° TEES OR ELLS. ALL LINES SHALL BE ANCHORED.

ONSHORE ORDER NO. 1
Gasco Production Company
Federal #21-17-9-19
751' FNL and 1781' FWL
NE NW Section 17, T9S - R19E
Uintah County, Utah

CONFIDENTIAL - TIGHT HOLE

Lease No. UTU-0017991

SURFACE USE PLAN

Page 1

**ONSHORE OIL & GAS ORDER NO. 1
NOTIFICATION REQUIREMENTS**

Location Construction -	forty-eight (48) hours prior to construction of location and access roads.
Location Completion -	prior to moving on the drilling rig.
Spud Notice -	at least twenty-four (24) hours prior to spudding the well.
Casing String and - Cementing	twenty-four (24) hours prior to running casing and cementing all casing strings.
BOP and Related - Equipment Tests	twenty-four (24) hours prior to initiating pressure tests.
First Production - Notice	within five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

The onsite inspection for the subject well site was conducted on Thursday, August 30, 2007 at approximately 3:09 p.m. Weather conditions were clear and warm. In attendance at the onsite inspection were the following individuals:

Darren Williams	Natural Resource Specialist	Bureau of Land Management
Brandon McDonald	Wildlife Biologist	Bureau of Land Management
Randy Smith	Permitting Agent	Permitco Inc.
Shon McKinnon	Consultant	Gasco Production Company
Jesse Walton	Surveyor	Uintah Engineering and Land Surveying
Brian O'Hearn	Ecologist	SWCA
Linda Sperry	Environmental Specialist	SWCA

A. EXISTING ROADS

1. The proposed well site is located approximately 25.4 miles southeast of Myton, Utah.



Gasco Production Company

Federal #21-17-9-19

Lease No. UTU-0017991

751' FNL and 1781' FWL

NE NW Section 17, T9S - R19E

SURFACE USE PLAN

Uintah County, Utah

Page 2

2. Directions to the location from Myton, Utah are as follows:

Proceed southwesterly on Highway 40 for 1.5 miles. Turn left and proceed southeasterly for approximately 11 miles to the Castle Peak Mine. Turn left and proceed east for approximately 12.9 miles on the 8 mile flat road. Turn left onto the proposed access and proceed northeast 160 feet until reaching the proposed location.
3. For location of access roads within a 2-Mile radius, see Maps A & B.
4. Improvement to existing main roads will not be required.
5. All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.
6. Existing roads and newly constructed roads on surface under the jurisdiction of any Surface Managing Agency shall be maintained in accordance with the standards of the SMA.

B. NEW OR RECONSTRUCTED ACCESS ROADS

1. Approximately 160 feet of new construction will be necessary .
2. The maximum grade of the new construction will be approximately 2%.
3. No culverts or low water crossings will be necessary.
4. The last 160 feet of new access road was centerline flagged at the time of staking.
5. The use of surfacing material is not anticipated, however it may be necessary depending on weather conditions.
6. No cattle guards will be necessary.
7. Surface disturbance and vehicular travel will be limited to the approved location and approved access route. Any additional area needed will be approved in advance.



Gasco Production Company

Lease No. UTU-0017991

Federal #21-17-9-19

751' FNL and 1781' FWL

NE NW Section 17, T9S - R19E

SURFACE USE PLAN

Uintah County, Utah

Page 3

8. Access roads and surface disturbing activities will conform to Gold Book standards.
9. The road will be constructed/upgraded to meet the standards of the anticipated traffic flow and all weather road requirements. Construction/upgrading shall include ditching, draining, graveling, crowing and capping the roadbed as necessary to provide a well constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot right-of-way will not be allowed. Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.
10. No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.
11. No road right of way will be required.

C. LOCATION OF EXISTING WELLS WITHIN A 1-MILE RADIUS OF THE PROPOSED LOCATION.

(See Map "C")

1. Water wells - none
2. Injection wells - none
3. Producing wells - two
4. Drilling wells - none
5. Disposal wells - none
6. Abandoned wells - ten
7. Dry Holes - none
8. Shut In Wells - two



D. LOCATION OF EXISTING AND/OR PROPOSED PRODUCTION FACILITIES

1. All permanent structures (onsite for six months or longer) constructed or installed (including oil well pump jacks) will be painted Covert Green. All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded.
2. If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain at a minimum, the entire contents of the largest tank within the facility/battery, unless more stringent protective requirements are deemed necessary by the authorized officer.
3. If the well is productive, a production facility layout will be submitted via sundry.
4. All loading lines will be placed inside the berm surrounding the tank battery.
5. Gas meter runs for each well will be located within 500 feet of the wellhead. The gas flow line will be buried or anchored down from the wellhead to the separator. Meter runs will be housed and/or fenced.
6. The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries. Tests for meter accuracy will be conducted monthly for the first three months on new meter installations and at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal Field Office. All meter measurement facilities will conform with Onshore Oil and Gas Order No. 4 for liquid hydrocarbons and Onshore Oil and Gas Order No. 5 for natural gas measurement.
7. If at any time the facilities located on public land and authorized by the terms of the lease are no longer included in the lease (due to a contraction in the unit or other lease or unit boundary change), BLM will process a change in authorization to the appropriate statute. The authorization will be subject to appropriate rental or other financial obligation as determined by the authorized officer.
8. Any necessary pits will be properly fenced to prevent any wildlife entry.



9. All site security guidelines identified in 43 CFR 3162.7 regulations will be adhered to.
10. All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the District Manager.
11. All access roads will be maintained as necessary to prevent erosion and accommodate year-round traffic.
12. The road will be maintained in a safe useable condition.
13. Produced water will be stored in a 300 bbl heated, insulated tank, then hauled to a commercial disposal site such as Disposal Inc., or Brennan Bottom.
14. Pipelines will follow the route shown on Map D. See Pipeline detail attached. Pipeline right of way is needed for the portion of pipeline outside of lease boundary UTU-0017991. We hereby request that this APD be used as our application for pipeline right of way. Please notify us once a category determination has been made so that we may send the necessary fees.

E. LOCATION AND TYPE OF WATER SUPPLY

1. The proposed water source will be the Nebecker Water Service at the Nebecker Water Station in Myton, permit #43-1721.
2. Water will be hauled by Nebecker Water Service to the location over the access roads shown on Maps A and B.
3. No water well will be drilled on this lease.

F. CONSTRUCTION MATERIALS

1. Surface and subsoil materials in the immediate area will be utilized.
2. Any gravel used will be obtained from a commercial source.
3. The use of materials under BLM jurisdiction will conform with 43 CFR 3610.2.3. Construction material will not be located on lease.
4. No construction materials will be removed from Federal land.



G. METHODS OF HANDLING WASTE

1. The reserve pit will be constructed so as not to leak, break, or allow discharge.
2. At the request of the BLM, the reserve pit will be lined with a 12 mil liner. If fractured rock is encountered, the pit will be first lined with sufficient bedding (either straw or dirt) to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash, scrap pipe, etc., that could puncture the liner will be disposed of in the pit. More stringent protective requirements may be deemed necessary by the A.O.
3. Burning will not be allowed. All trash will be contained in a trash cage and its contents removed at the end of drilling operations and hauled to an approved disposal sight.
4. After first production, produced waste water will be confined to a unlined pit or storage tank for a period not to exceed ninety (90) days. During the 90-day period, in accordance with Onshore Order No. 7, an application for approval of a permanent disposal method and location, along with the required water analysis, will be submitted for the AO's approval. Failure to file an application within the time allowed will be considered an incident of noncompliance.
5. Drill cuttings are to be contained and buried in the reserve pit.
6. Any salts and/or chemicals which are an integral part of the drilling system will be disposed of in the same manner as the drilling fluid.
7. A chemical porta-toilet will be furnished with the drilling rig.
8. The produced fluids will be produced into a test tank until such time as construction of production facilities is completed. Any spills of oil, gas salt water or other produced fluids will be cleaned up and removed.

H. ANCILLARY FACILITIES

There are no airstrips, camps, or other facilities planned during the drilling of the proposed well.



I. WELL SITE LAYOUT

1. The operator or his/her contractor shall contact the BLM Office at 435/781-4400 forty-eight (48) hours prior to construction activities.
2. The reserve pit will be located on the north side of the location.
3. The flare pit will be located on the east side of the reserve pit, a minimum of 100 feet from the well head and 20 feet from the reserve pit fence.
4. The stockpiled topsoil (first six inches) will be stored on the south side of the location, between Corners 2 and 9 near the wellpad. Topsoil along the access route will be wind rowed on the uphill side.
5. Access to the well pad will be from the southwest as shown on the Pit & Pad Layout.
6. See Location Layout for orientation of rig, cross section of drill pad and cuts and fills.
7. The location of mud tanks; reserve pit, trash cage; pipe racks; living facilities and soil stockpiles will be shown on the Location Layout.
8. All pits will be fenced according to the following minimum standards:
 - a. 39 inch net wire shall be used with at least two strands of barbed wire on top of the net wire (barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
 - b. The net wire shall be no more than 2-inches above the ground. The barbed wire shall be 3-inches above the net wire. Total height of the fence shall be at least 42-inches.
 - c. Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.
 - d. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.



- e. All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.
9. The reserve pit fencing will be on three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until cleanup.

J. PLANS FOR SURFACE RECLAMATION

Producing Location

1. Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash and junk not required for production.
2. Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with 43 CFR 3162.7-1.
3. If a plastic nylon reinforced liner is used it shall be torn and perforated before backfilling of the reserve pit.
4. The reserve pit and that portion of the location not needed for production facilities or operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 120 days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed and all cans, barrels, pipe, etc., will be removed.
5. Reclamation of unused disturbed areas on the well pad/access road no longer needed for operations, such as cut slopes, and fill areas will be accomplished by grading, leveling and seeding as recommended by the Authorized Officer. A seed mixture will be specified by the Bureau of Land Management in their Conditions of Approval for the subject well.

Seeding will be performed immediately after the location has been reclaimed and the pit has been backfilled, regardless of the time of year. Seed will be broadcast and walked in with a dozer.

6. The topsoil stockpile will be seeded as soon as the location has been constructed with the same recommended seed mix. The seed will be walked in with a cat.



Dry Hole

1. At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and BLM will attach the appropriate surface rehabilitation conditions of approval.

Interim Surface Reclamation will be as follows:

1. Immediately after final well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production operations.
2. Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in the reserve pit will be removed. Other waste and spoil materials will be disposed of immediately, weather permitting, upon final well completion.
3. If a synthetic, nylon re-enforced, liner is used, the excess liner will be cut off and removed and the remaining liner will be torn and perforated while backfilling the reserve pit. Alternatively, the pit will be pumped dry, the liner folded into the pit, and the pit backfilled. The liner will be buried to a minimum of four (4) feet deep.
4. The reserve pit will be reclaimed within 180 days from the date of final well completion, weather permitting.
5. The reserve pit and that portion of the location not needed for production and storage facilities, and everyday production operations, will be reshaped to the approximate original contours to the extent possible. This will be completed by backfilling and crowning the pit to prevent water from standing. Topsoil will be re-spread up to the rig anchor points, excluding the area needed for production and storage facilities and everyday production operations. Re-seeding, using appropriate reclamation methods, will occur immediately following the re-spreading of topsoil, weather permitting. The Authorized Officer will provide a seed mixture to re-vegetate the reserve pit and other unused disturbed areas at the time of the onsite.



K. SURFACE OWNERSHIP

Access Roads - The majority of the access roads are maintained by the County Road Department or the Bureau of Land Management.

Well pad - The well pad is located on lands managed by the BLM.

L. OTHER INFORMATION

1. A Class III archeological survey has been conducted by Grand River Institute (GRI Project No. 2762, dated July 13, 2007). A copy of this report is attached.
2. A paleontological review was conducted by Alden Hamblin on July 26, 2007. No mitigation has been recommended. A copy of this report is attached.
3. The operator is responsible for informing all persons in the areas who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator is to immediately stop work that might further disturb such materials, and contact the authorized officer (AO). Within five working days the AO will inform the operator as to:

-whether the materials appear eligible for the National Register of Historic Places;

-the mitigation measures the operator will likely have to undertake before the site can be used (assuming in situ preservation is not necessary); and

-a time frame for the AO to complete and expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate. If the operator wishes, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials may be required. Otherwise, the operator will be responsible for mitigation costs. The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.



Gasco Production Company

Federal #21-17-9-19

Lease No. UTU-0017991

751' FNL and 1781' FWL

NE NW Section 17, T9S - R19E

SURFACE USE PLAN

Uintah County, Utah

Page 11

4. The operator will control noxious weeds along rights-of-way for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds may be obtained from the BLM, or the appropriate County Extension Office. On BLM administered land it is required that a Pesticide Use Proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.
5. Drilling rigs and/or equipment used during drilling operations on this wellsite will not be stacked or stored on Federal Lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure.
6. All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved plan of operations, and any applicable Notice to Lessees. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.
7. A complete copy of the approved APD shall be on location during construction of the location and drilling activities.
8. There will be no deviation from the proposed drilling and/or work over program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended or abandoned will be identified in accordance with 43 CFR 3162.
9. "Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.
10. This permit will be valid for a period of two years from the date of approval. An extension period may be granted, if requested, prior to the expiration of the original approval period. After permit termination, a new application will be filed for approval for any future operations.
11. The operator or his contractor shall contact the BLM Offices at 435/781-4400 48 hours prior to construction activities.
12. The BLM Office shall be notified upon site completion prior to moving on the drilling rig.



ONSHORE ORDER NO. 1

Gasco Production Company

Federal #21-17-9-19

751' FNL and 1781' FWL

NE NW Section 17, T9S - R19E

Uintah County, Utah

CONFIDENTIAL - TIGHT HOLE

Lease No. UTU-0017991

SURFACE USE PLAN

Page 12

AGENT AND OPERATOR'S CONTACT INFORMATION

Permit Matters

PERMITCO INC.

14421 County Road 10

Ft. Lupton, CO 80621

303/857-9999 (O)

303/857-0577 (F)

Lisa Smith

Drilling & Completion Matters

Gasco Production Company

8 Inverness Drive East, Suite 100

Englewood, CO 80112

John Longwell

303/483-0044 (O)

303/ 483-0011(F)

Shawn Elworthy - Field Superintendent

Roosevelt, UT

435-823-4272 (cell)



PIPELINE INFORMATION
Federal #21-17-9-19

1. The type of pipeline is a single well flow line.
2. The outside diameter (O.D.) of all will be 8 inches maximum.
3. The anticipated production through the line is approximately 2000 MCF per day.
4. The anticipated maximum test pressure is 1000 psi.
5. The anticipated operating pressure is 100-200 psi.
6. The type of pipe is steel.
7. The method of coupling is welded.
8. There are no other pipelines to be associated in the same right of way.
9. There will be other objects to be associated in the same right of way. (Risers, Pig Launchers Pig Traps, meters and other appurtenances as required.)
10. The total length of pipeline is approximately 11,500 feet- see Map D.
11. Due to the rocky nature of the area, and shallow soils, the line will be laid on the surface as shown on Map D. The pipeline will follow proposed roads with the exception of approximately 1/4 miles which will be cross country to the tie-in point.
12. The construction width for total surface disturbing activities is 30 feet.
13. The estimated total acreage involving all surface disturbing activities is 7.92 acres.
14. Any surface disturbance created as a result of the pipeline construction will be reclaimed utilizing the reclamation procedures and seed mixture specified by the Bureau of Land Management.
15. The line will be tested with gas pressure to 1000 psi.



Gasco Production Company
Federal #21-17-9-19
751' FNL and 1781' FWL
NE NW Section 17, T9S - R19E
Uintah County, UT

CERTIFICATION

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge, of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements. Executed this 10th day of September, 2007.

Venessa Langmacher
Venessa Langmacher

Agent for Gasco Production Company
Title

14421 County Road 10, Fort Lupton, CO 80621
Address

303/857-9999
Telephone

VLLPermitco@aol.com
E-mail



GASCO PRODUCTION COMPANY

FEDERAL #21-17-9-19

LOCATED IN UINTAH COUNTY, UTAH
SECTION 17, T9S, R19E, S.L.B.&M.

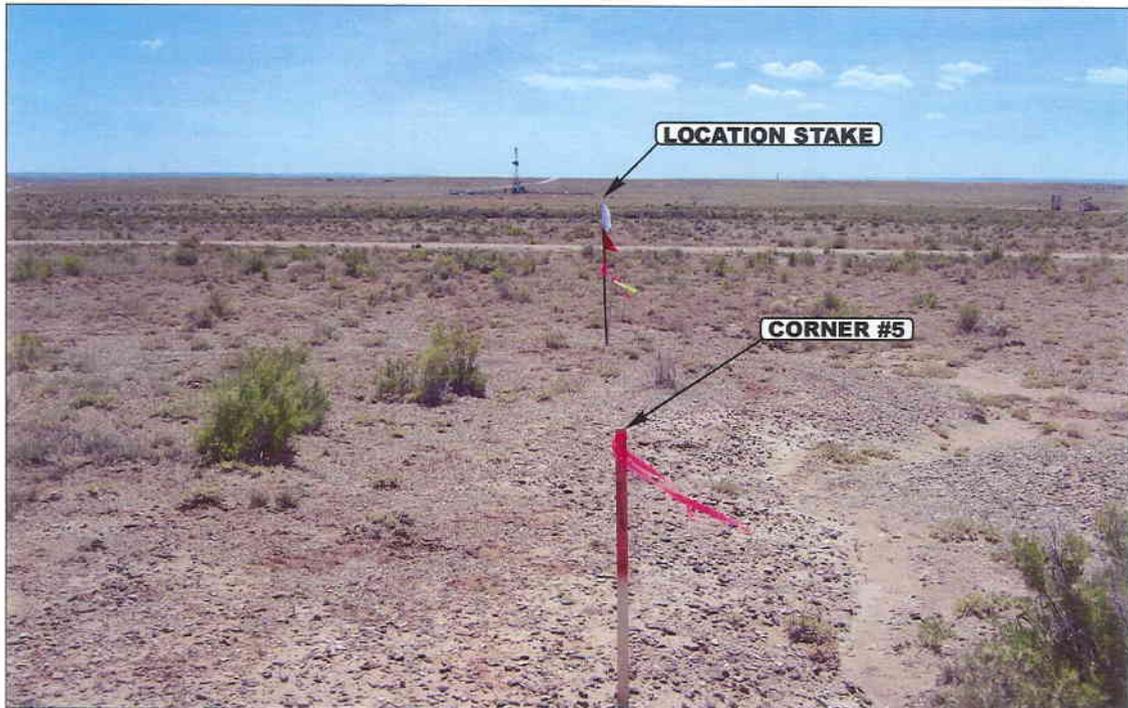


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: SOUTHWESTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHERLY



- Since 1964 -

UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS


06 19 07
MONTH DAY YEAR

PHOTO

TAKEN BY: J.W.

DRAWN BY: A.A.

REVISED: 00-00-00

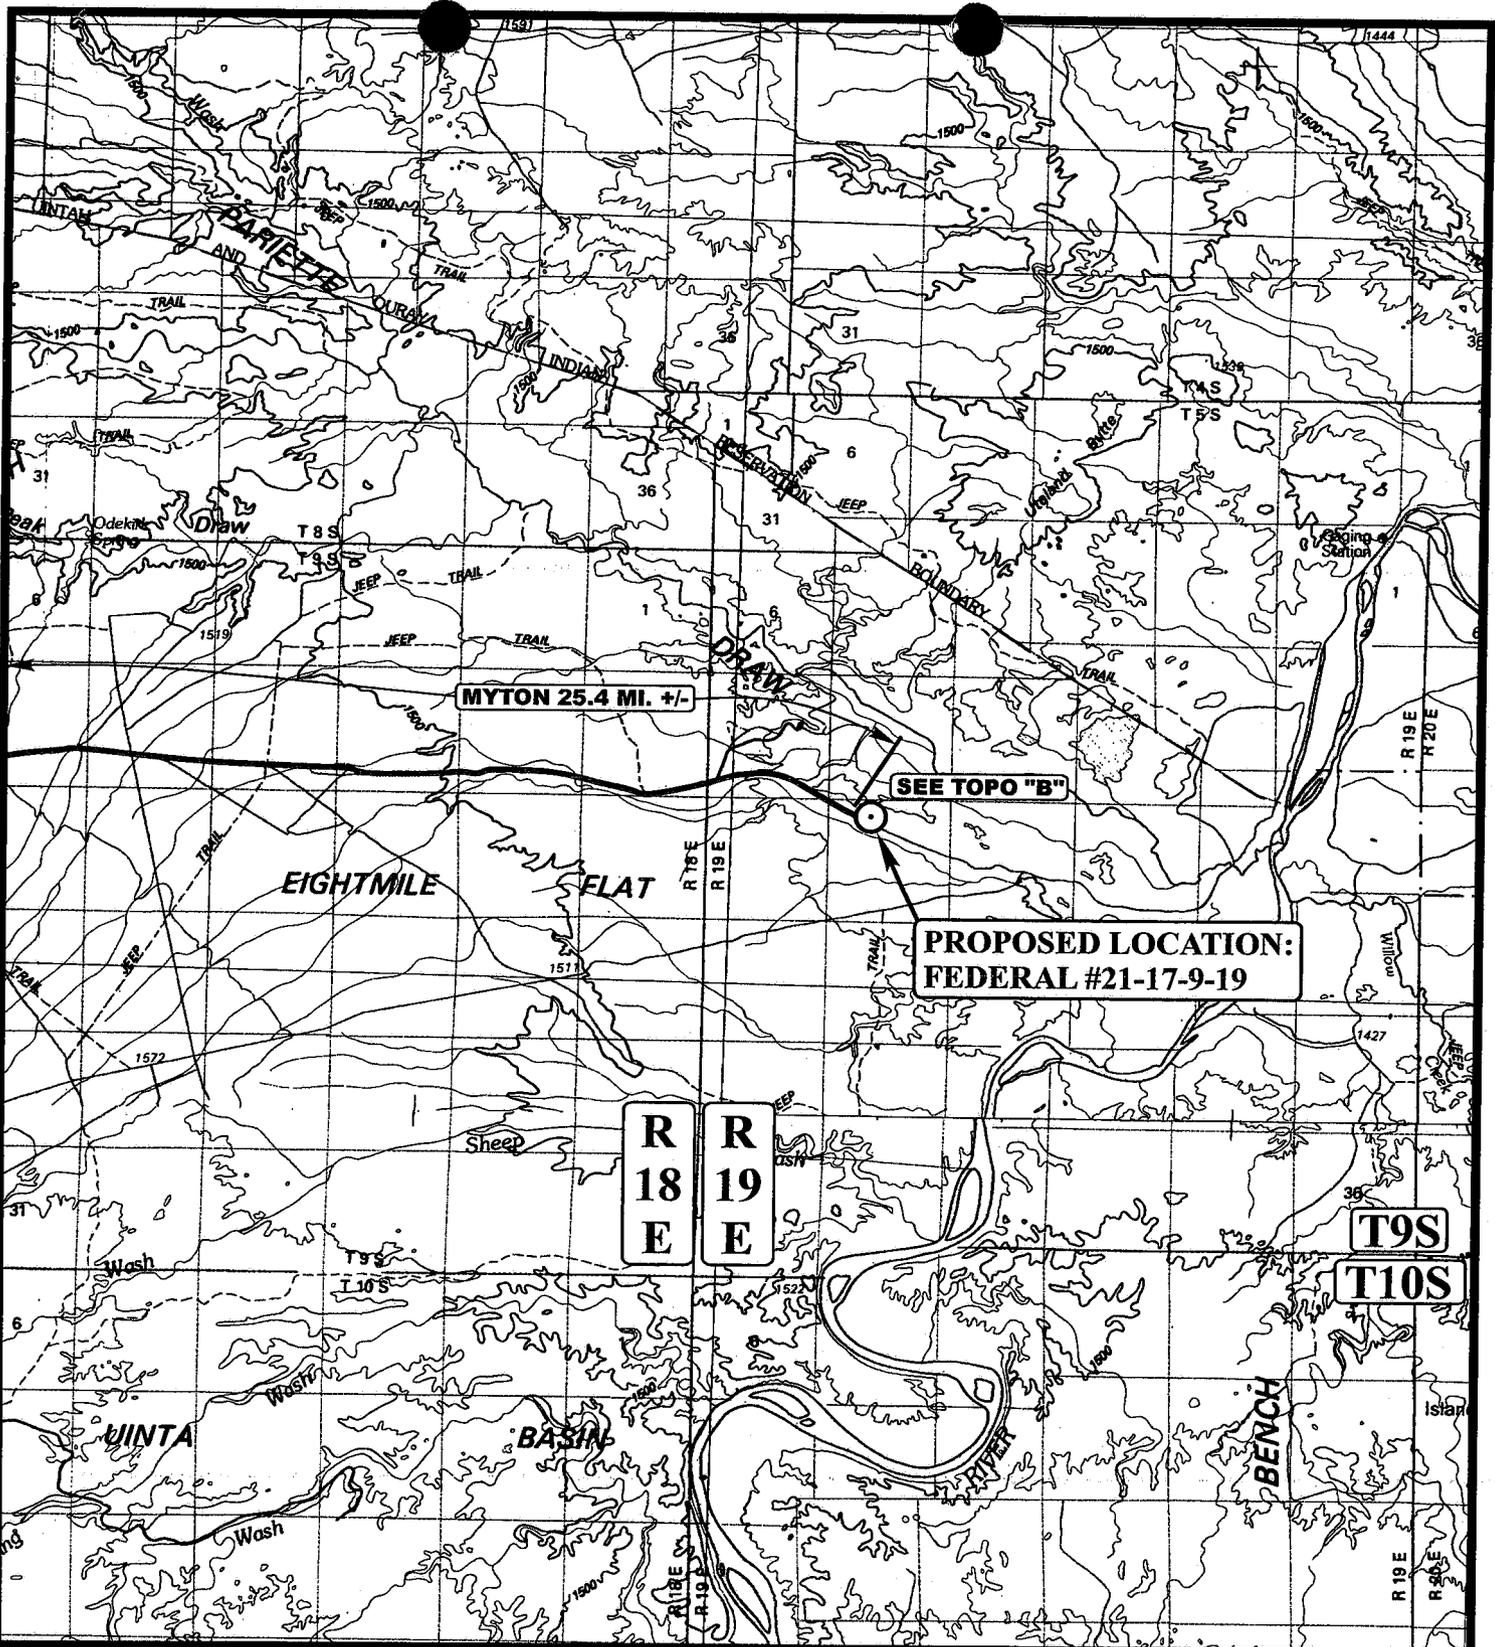

LEGEND:

⊙ PROPOSED LOCATION



GASCO PRODUCTION COMPANY

FEDERAL #21-17-9-19
 SECTION 17, T9S, R19E, S.L.B.&M.
 751' FNL 1781' FWL




Utah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP 06 19 07
 MONTH DAY YEAR

SCALE: 1:100,000 DRAWN BY: A.A. REVISED: 00-00-00



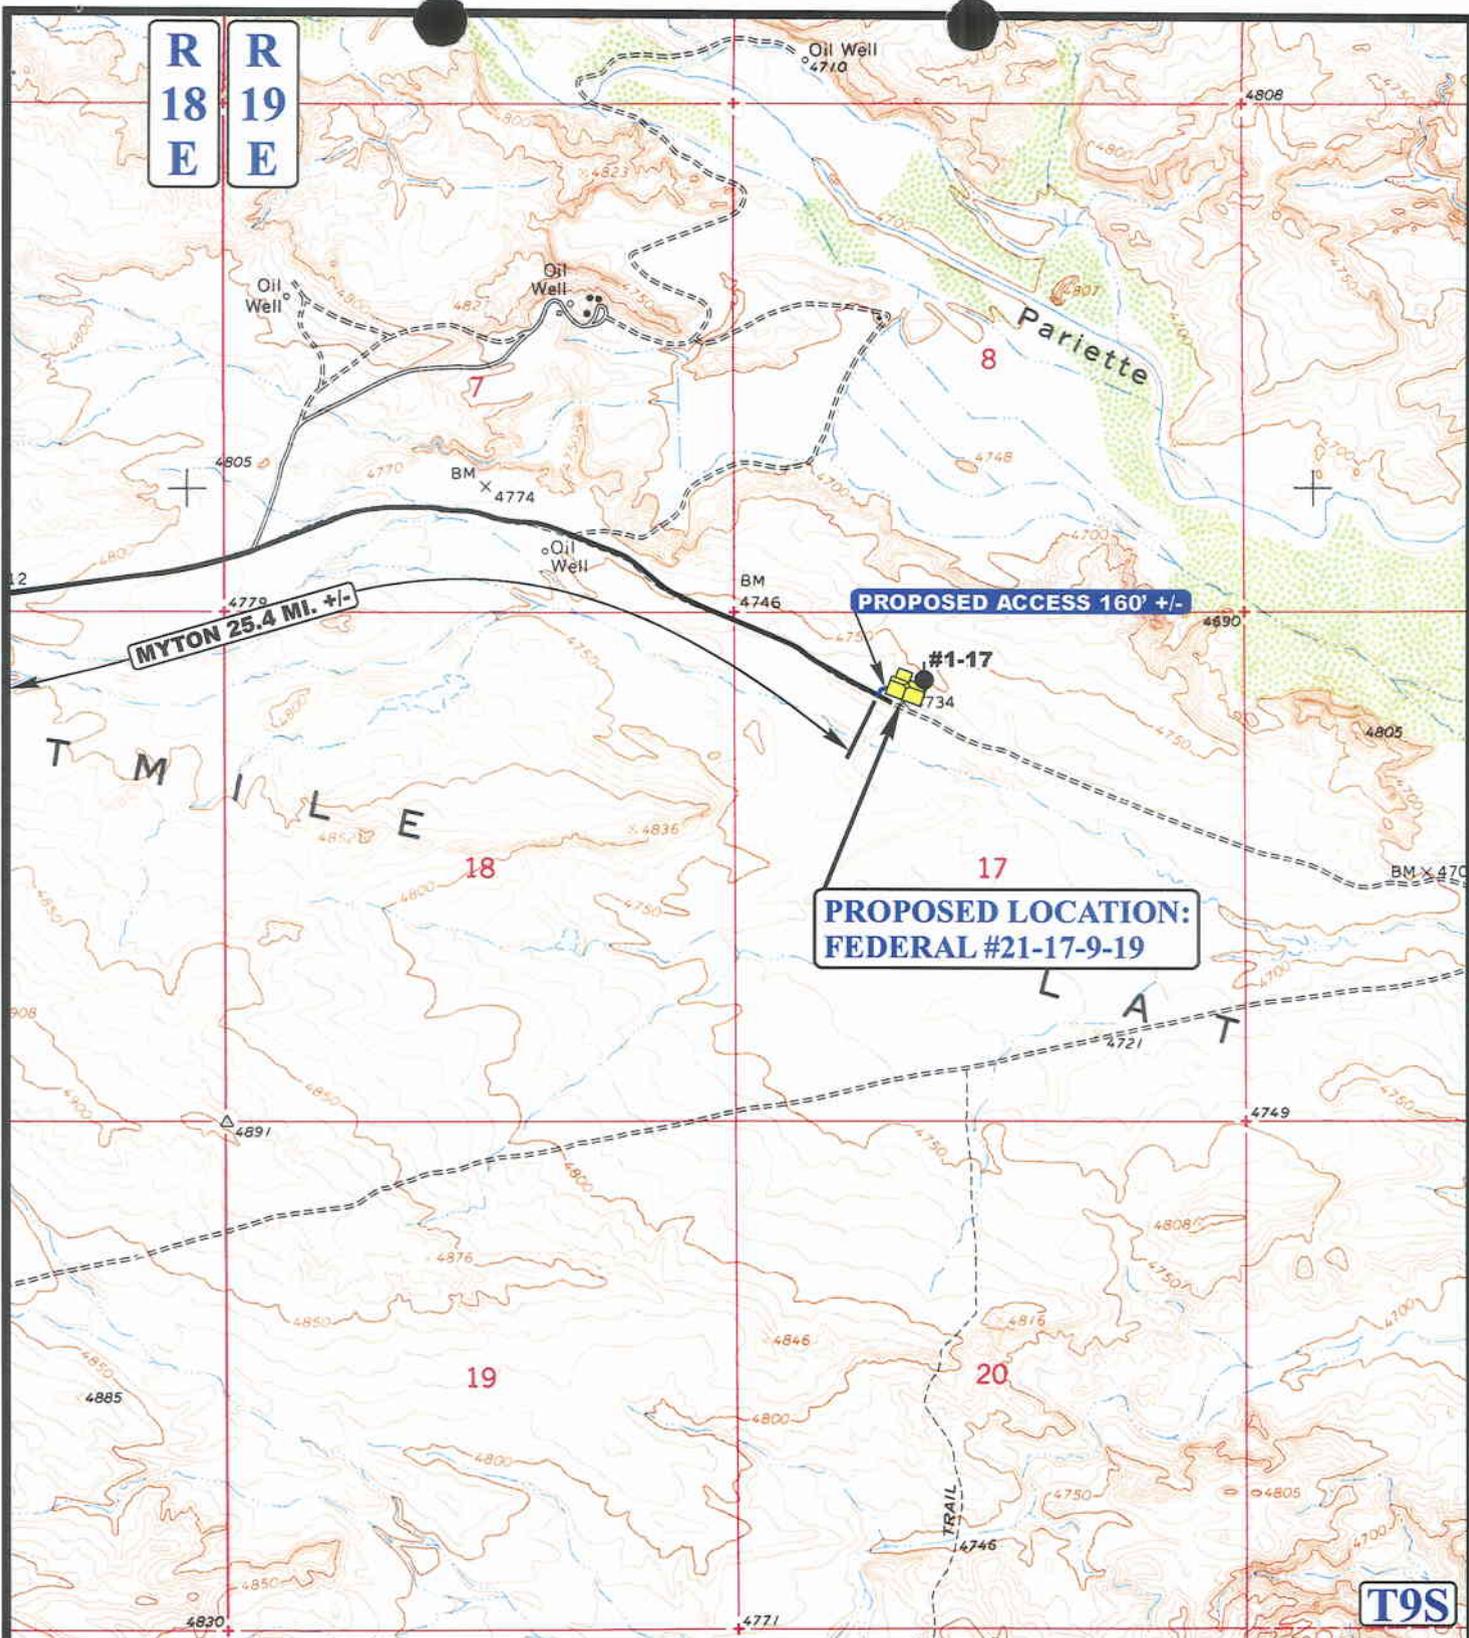

LEGEND:

-  EXISTING ROAD
-  PROPOSED ACCESS ROAD



GASCO PRODUCTION COMPANY

FEDERAL #21-17-9-19
SECTION 17, T9S, R19E, S.L.B.&M.
751' FNL 1781' FWL




Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

06 19 07
 MONTH DAY YEAR



SCALE: 1" = 2000' DRAWN BY: A.A. REVISED: 00-00-00

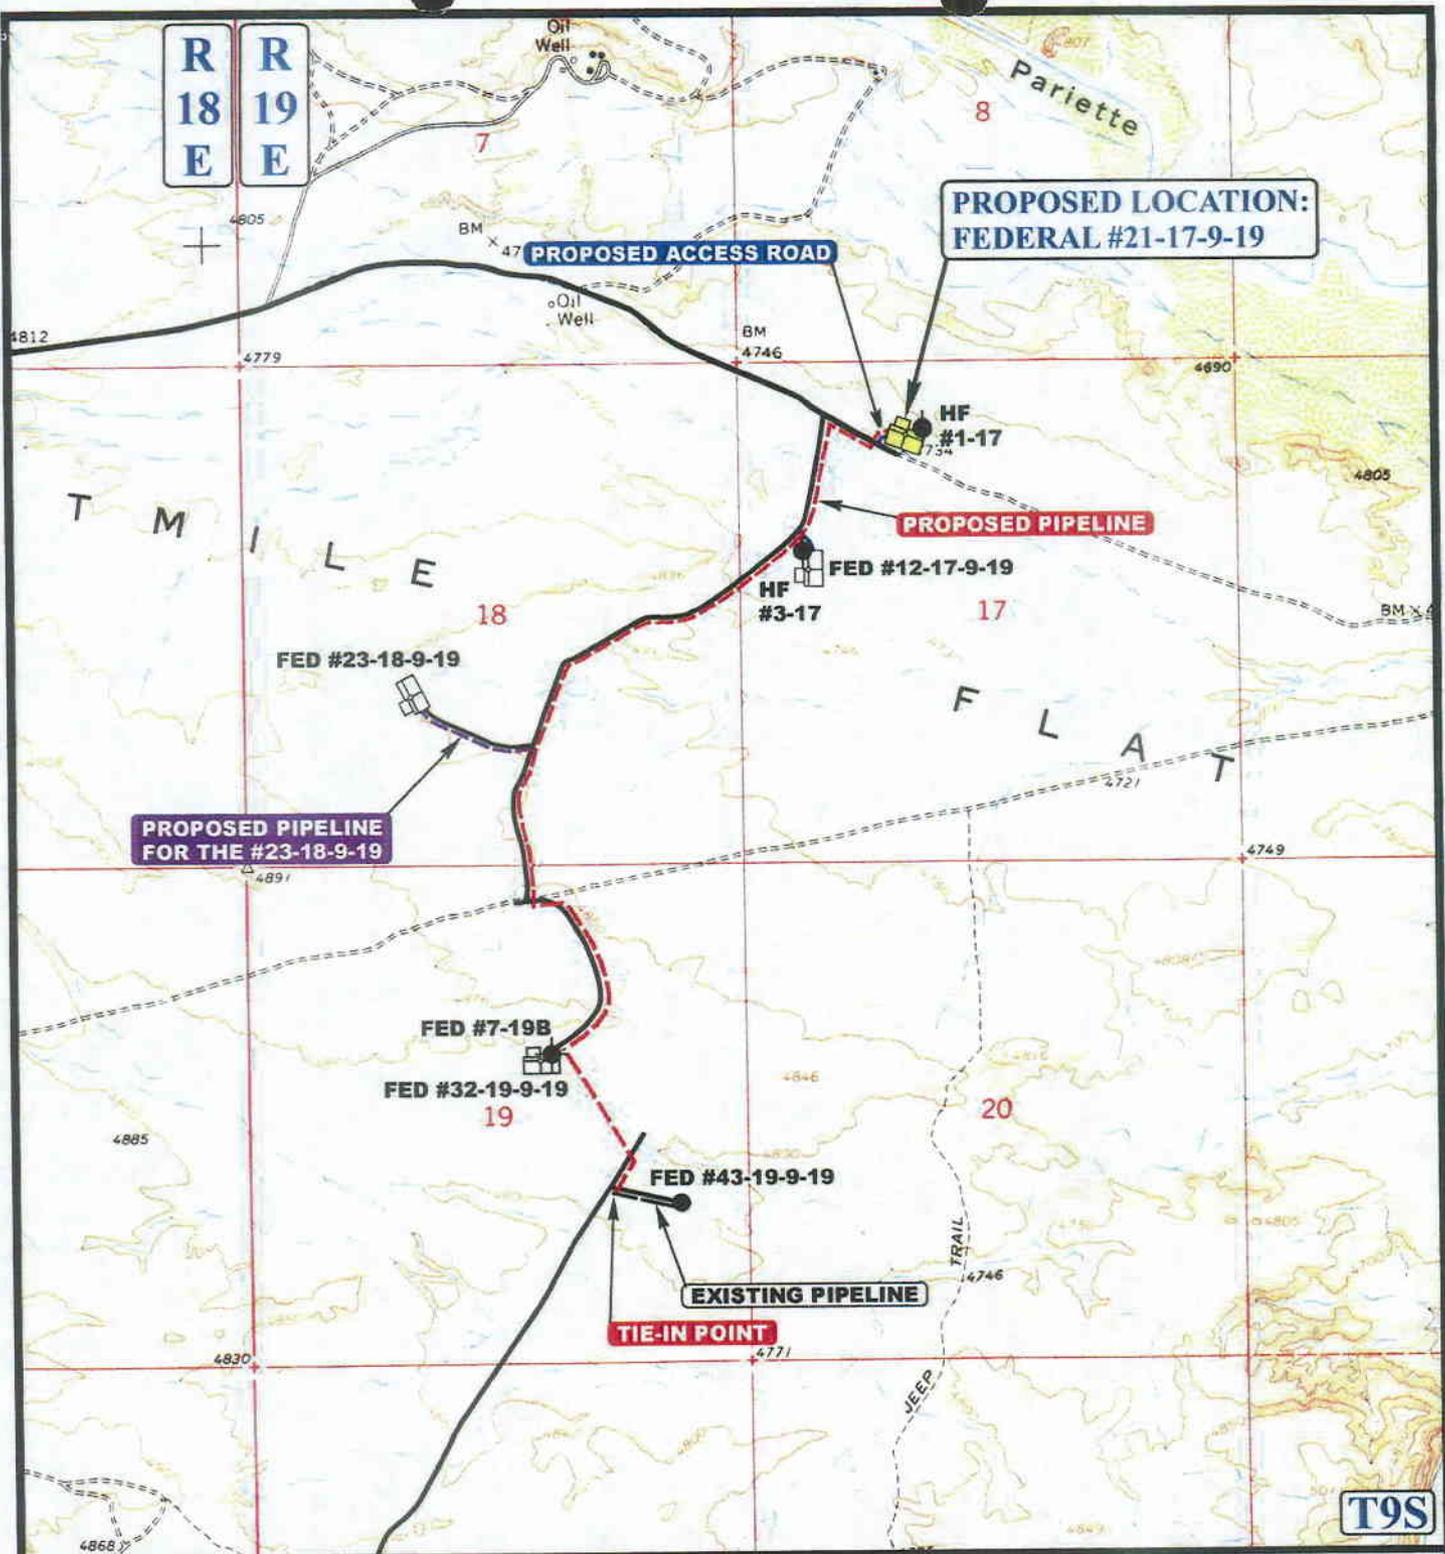

APPROXIMATE TOTAL PIPELINE DISTANCE = 11,500' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- PROPOSED PIPELINE
- PROPOSED PIPELINE (SERVICING OTHER WELLS)

N



GASCO PRODUCTION COMPANY

**FEDERAL #21-17-9-19
SECTION 17, T9S, R19E, S.L.B.&M.
751' FNL 1781' FWL**



Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP

06 19 07
MONTH DAY YEAR


SCALE: 1" = 2000' DRAWN BY: A.A. REVISED: 09-07-07 ZL

D
TOPO


GASCO PRODUCTION COMPANY

LOCATION LAYOUT FOR

FEDERAL #21-17-9-19
SECTION 17, T9S, R19E, S.L.B.&M.
751' FNL 1781' FWL



SCALE: 1" = 50'
DATE: 07-11-07
Drawn By: C.H.

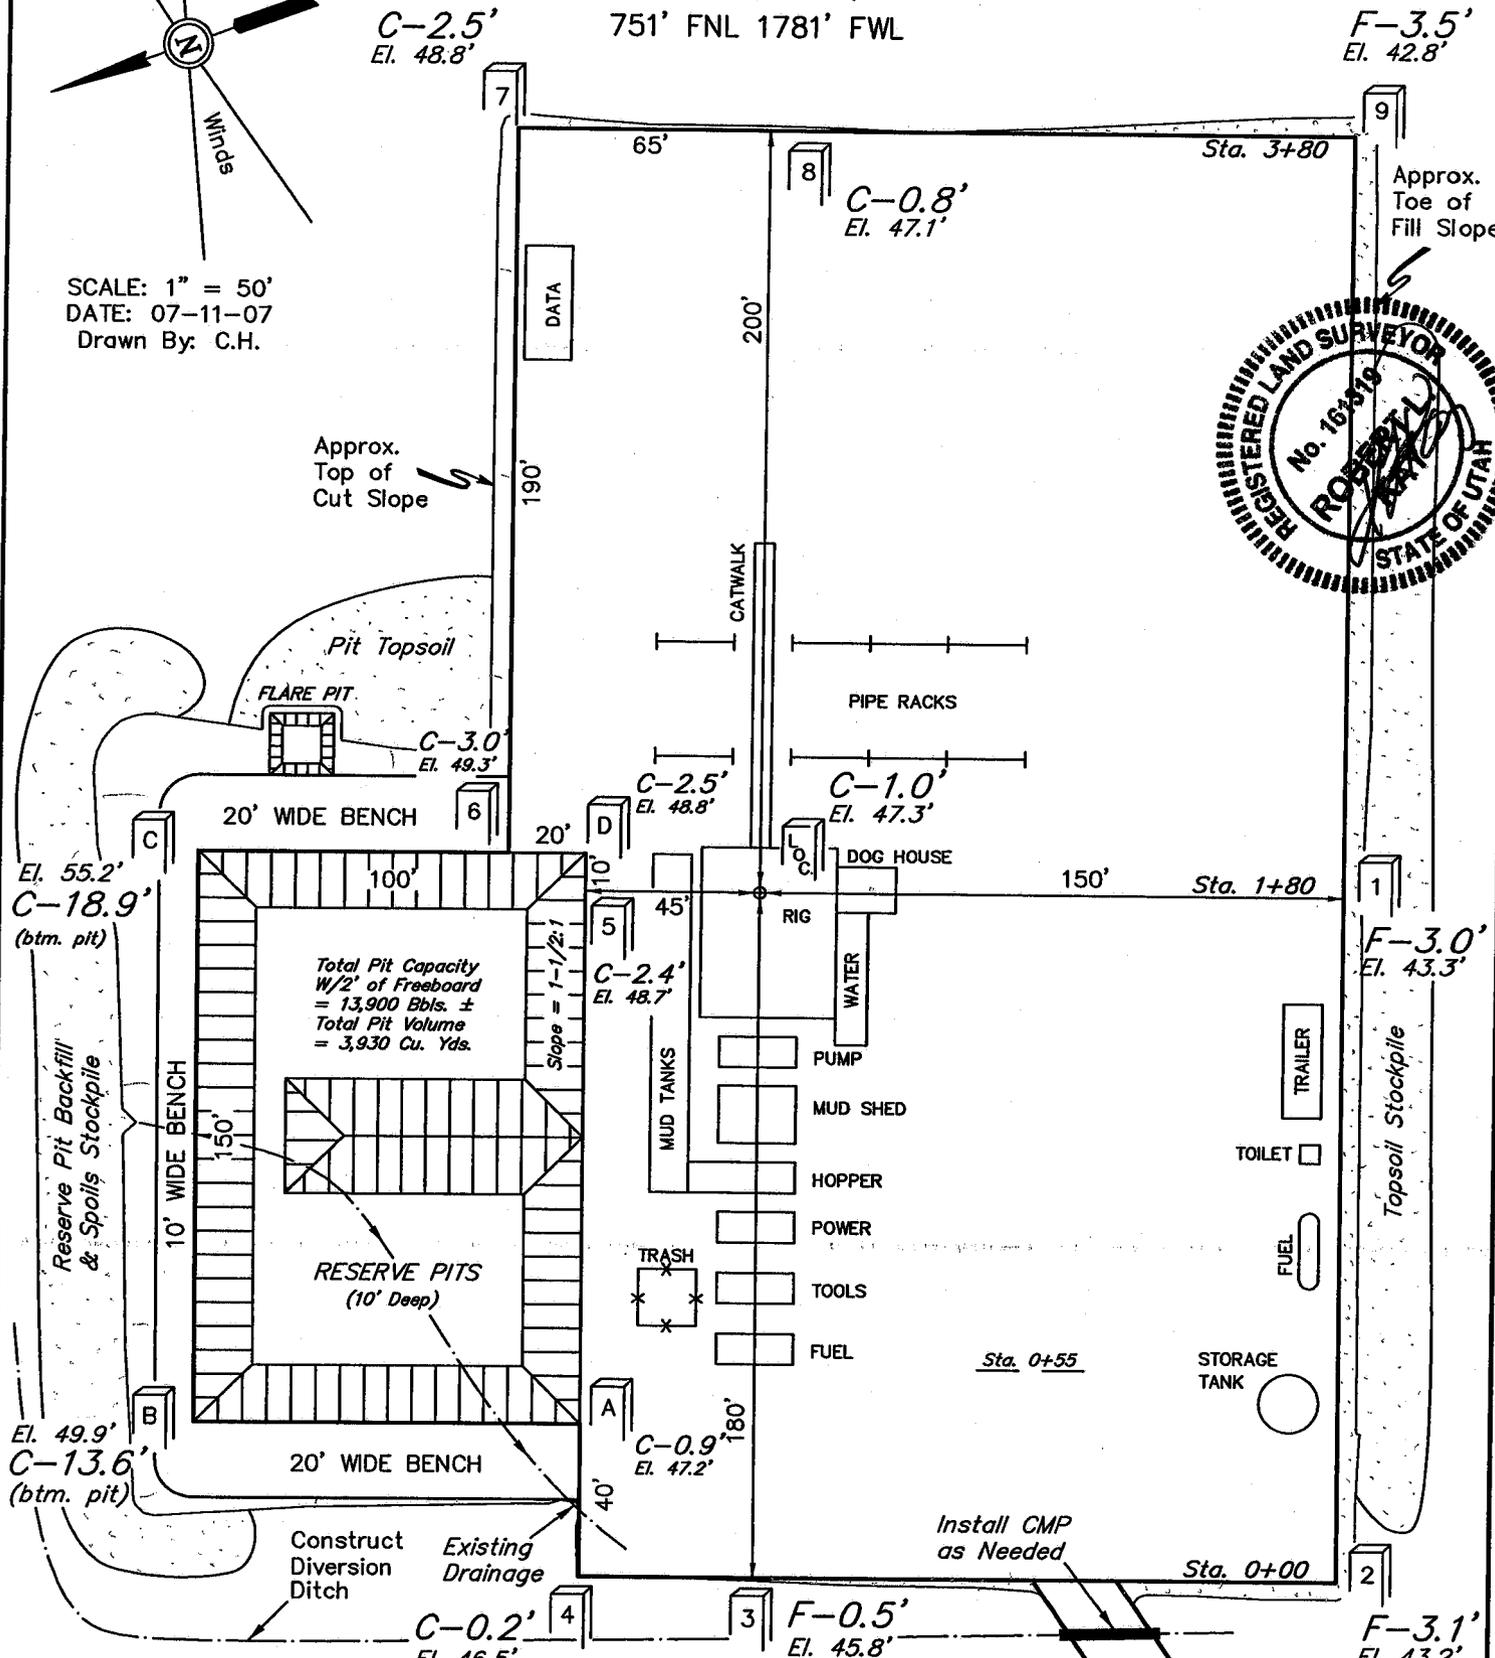


Elev. Ungraded Ground at Location Stake = 4747.3'
Elev. Graded Ground at Location Stake = 4746.3'

Proposed Access Road
UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (801) 789-1017





GASCO PRODUCTION COMPANY

TYPICAL CROSS SECTIONS FOR

FEDERAL #21-17-9-19
SECTION 17, T9S, R19E, S.L.B.&M.
751' FNL 1781' FWL



DATE: 07-11-07
Drawn By: C.H.

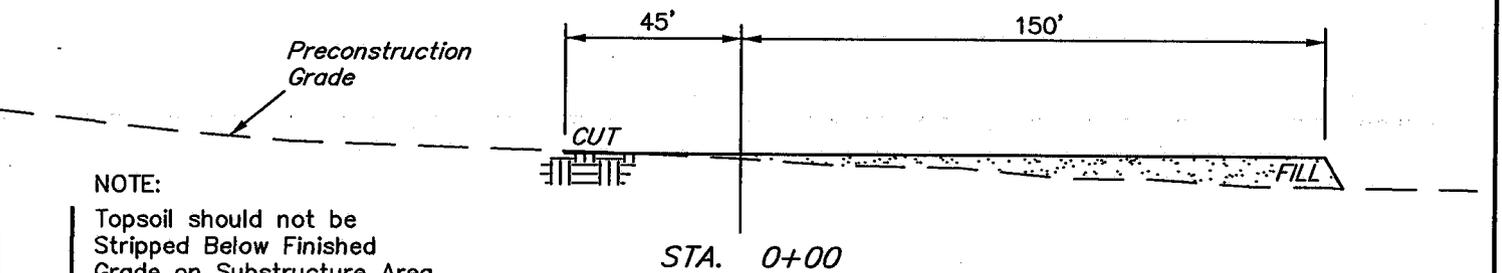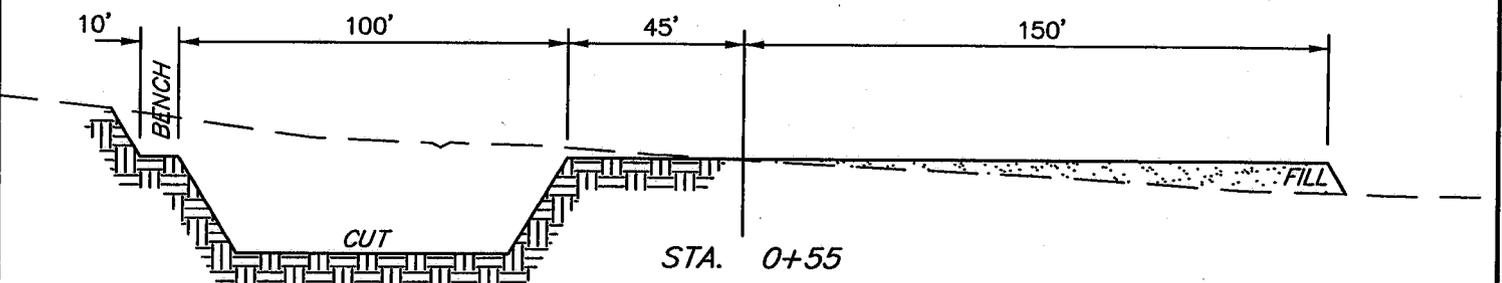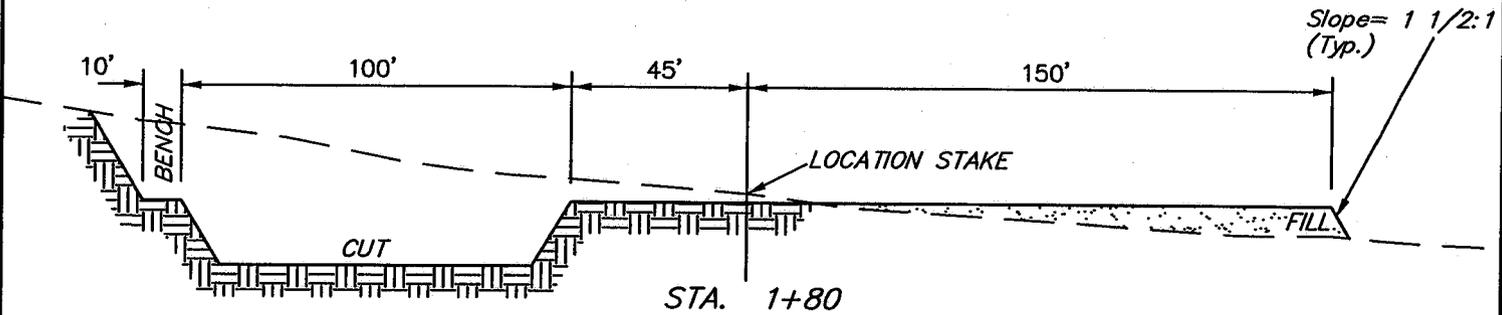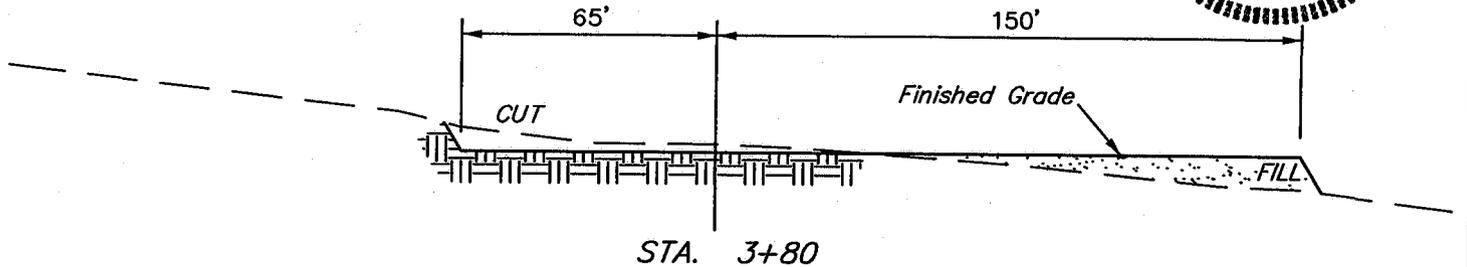

NOTE:
Topsoil should not be Stripped Below Finished Grade on Substructure Area.

*** NOTE:**
FILL QUANTITY INCLUDES 5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT		
(6") Topsoil Stripping	=	2,010 Cu. Yds.
Remaining Location	=	7,200 Cu. Yds.
TOTAL CUT	=	9,210 CU.YDS.
FILL	=	5,230 CU.YDS.

EXCESS MATERIAL	=	3,980 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	=	3,980 Cu. Yds.
EXCESS UNBALANCE (After Interim Rehabilitation)	=	0 Cu. Yds.

FEDERAL STIPULATIONS AND TIMING RESTRICTIONS

Any timing limitation stipulations will be attached as a Condition of Approval by the BLM.

Mountain Plover from May 15 - June 15 and Burrowing Owl from April 1 - August 15 may apply.



**Class III Cultural Resource Inventory Report
for
Eleven Proposed Well Locations and Related Linear Routes (3.9 miles)
in Duchesne and Uintah Counties, Utah
for
Gasco Production Company**

GRI Project No. 2762
13 July 2007

Prepared by

Grand River Institute
P.O. Box 3543
Grand Junction, Colorado 81502
BLM Antiquities Permit No.07UT54939
UDSH Project Authorization No. U07-GB-0654b

Carl E. Conner, Principal Investigator

Submitted to

The Bureau of Land Management
Vernal District Office
170 South 500 East
Vernal, Utah 84078

Abstract

Grand River Institute conducted a Class III cultural resources inventory for Gasco Production Company of eleven proposed well locations (Fed. #12-17-9-19, Fed. #21-17-9-19, Wilkin Ridge Fed. #31-19-10-17, Wilkin Ridge Fed. #24-30-10-17, Wilkin Ridge Fed. #31-30-10-17, Wilkin Ridge Fed. #22-31-10-17, Wilkin Ridge Fed. #24-31-10-17, Uteland Fed. #32-3-10-18, Antelope Fed. #14-15-10-18, Fed. #32-21-10-18, and Fed. #22-22-10-18) and 3.9 miles of linear routes (roads and/or pipelines) in Duchesne and Uintah Counties, Utah, under BLM Antiquities Permit No. 07UT-54939 and Utah Division of State History (UDSH) Project Authorization No. U07-GB-0654b. This work was done to meet requirements of Federal laws that protect cultural resources.

Files searches conducted through the BLM Vernal Field Office (BLM) and through Utah Division of State History indicated no sites were previously recorded in the project areas. Field work was performed on the 10th, 11th and 12th of July 2007. A total of about 200 acres (BLM) was inspected.

As a result two isolated finds were encountered (an historic trash scatter and two prehistoric tested cobbles/cores). Both were field evaluated as non-significant and no further work is advised. Accordingly, no significant historical properties were identified within the areas of direct impact and archaeological clearance is recommended for the proposed wells and linear routes.

Table of Contents

Introduction	1
Location of Project Area	1
Environment	2
Files Search	7
Study Objectives	8
Field Methods	8
Study Findings	9
Site Significance	9
Isolated Find Descriptions	9
Summary of Site Evaluations and Management Recommendations	10
References	10
APPENDIX A: Cultural Resources Location Data and IMACS Forms	A.1

List of Figures and Tables

Figures 1 - 4. Project location maps	3, 4, 5, 6
Figure A-1. Cultural resources location map	A.2 and A.3
Table 1. List of well locations and linear routes	1
Table 2. List of previous projects	7

Introduction

At the request of Gasco, Inc. and the Bureau of Land Management Vernal Field Office (BLM), Grand River Institute (GRI) conducted a Class III cultural resources inventory for Gasco Production Company of eleven proposed well locations (Fed. #12-17-9-19, Fed. #21-17-9-19, Wilkin Ridge Fed. #31-19-10-17, Wilkin Ridge Fed. #24-30-10-17, Wilkin Ridge Fed. #31-30-10-17, Wilkin Ridge Fed. #22-31-10-17, Wilkin Ridge Fed. #24-31-10-17, Uteland Fed. #32-3-10-18, Antelope Fed. #14-15-10-18, Fed. #32-21-10-18, and Fed. #22-22-10-18) and 3.9 miles of linear routes (roads and/or pipelines) in Duchesne and Uintah Counties, Utah, under BLM Antiquities Permit No. 07UT-54939 and Utah Division of State History (UDSH) Project Authorization No. U07-GB-0654b. A files search was conducted at BLM and through UDSH. Field work was performed on the 10th, 11th and 12th of July 2007. A total of about 200 acres (BLM) was inspected. The file searches, survey and report were completed by Carl E. Conner (Principal Investigator) and Barbara J. Davenport of GRI.

The survey was done to meet requirements of the Federal Land Policy and Management Act of 1976, the National Historic Preservation Act as amended in 1992, and the National Environmental Policy Act (NEPA) of 1969. These laws are concerned with the identification, evaluation, and protection of fragile, non-renewable evidences of human activity, occupation and endeavor reflected in districts, sites, structures, artifacts, objects, ruins, works of art, architecture, and natural features that were of importance in human events. Such resources tend to be localized and highly sensitive to disturbance.

Location of Project Area

The study area's discrete units lie southwest of Vernal, Utah, in Duchesne and Uintah Counties. The 10-acre blocks surveyed for the proposed new well locations, and the 200-foot-wide corridors for the proposed new access roads and/or pipeline routes are listed in Table 1 and shown in Figures 1 through 4. Notably, the linear distances of the inventoried access and pipeline routes are calculated outside the 10-acre block inventory areas.

Table 1. List of well locations and linear routes.

Well Designation	Location
Fed. #12-17-9-19	T. 9 S., R. 19 E., Section 17 (Existing access)
Fed. #21-17-9-19	T. 9 S., R. 19 E., Section 17 (640' access)
Wilkin Ridge Fed. #31-19-10-17	T. 10 S., R. 17 E., Section 19 (2640' access)
Wilkin Ridge Fed. #24-30-10-17	T. 10 S., R. 17 E., Section 30 (5970' access)

Well Designation	Location
Wilkin Ridge Fed. #31-30-10-17	T. 10 S., R. 17 E., Section 30 (1940' access)
Wilkin Ridge Fed. #22-31-10-17	T. 10 S., R. 17 E., Section 31 (380' access)
Wilkin Ridge Fed. #24-31-10-17	T. 10 S., R. 17 E., Section 31 (5770' access)
Uteland Fed. #32-3-10-18 (moved location)	T. 10 S., R. 18 E., Section 3 (Existing access)
Antelope Fed. #14-15-10-18	T. 10 S., R. 18 E., Section 15 (Existing access)
Fed. #32-21-10-18	T. 10 S., R. 18 E., Section 21 (530' access)
Fed. #22-22-10-18	T. 10 S., R. 18 E., Section 22 (2990' access)

Environment

The project areas are within the major geologic subdivision of the Colorado Plateau known as the Uinta Basin Section. In Utah, this section extends from the Uinta Mountains on the north to the Book Cliffs on the south. It is a broad downwarp into which Quaternary- and Tertiary-age deposits were made from the surrounding mountains which include Holocene and Pleistocene pediment deposits, and Eocene-age fluvial and lacustrine sedimentary rocks (Rigby 1976:xi). Physiographically, the basin includes the Uinta basin in the north portion and the Book Cliffs/Roan Plateau in the south portion. The lower Uinta Formation is the bedrock of the study area. Holocene and Pleistocene-age alluvium and colluvium occur as a veneer over the Uinta. It consists of channel and flood-plain stream deposits. Soils encountered were rocky, shaley, silty, and sandy loams, which are in general formed in residuum from the underlying formation. However, dunes are common in this region as well.

Elevations in the project area range from 4740-to-6520 feet. The terrain is characterized as bench land that is cut by dendritic washes. Vegetation is a shadscale desert community. Regional faunal inhabitants include deer, antelope, elk, black bear, coyote, mountain lion, cottontails, jack rabbits, and various raptors.

A cool, mid-latitude steppe climate prevails. Annual precipitation of this elevation range is between 7 and 10 inches. Temperatures range from 100°F in the summer to -40°F in January. Paleoenvironmental data are scant, but it is generally agreed that gross climatic conditions have remained fairly constant over the last 12,000 years. However, changes in effective moisture, and cooling-warming trends probably affected the prehistoric occupation of the region.

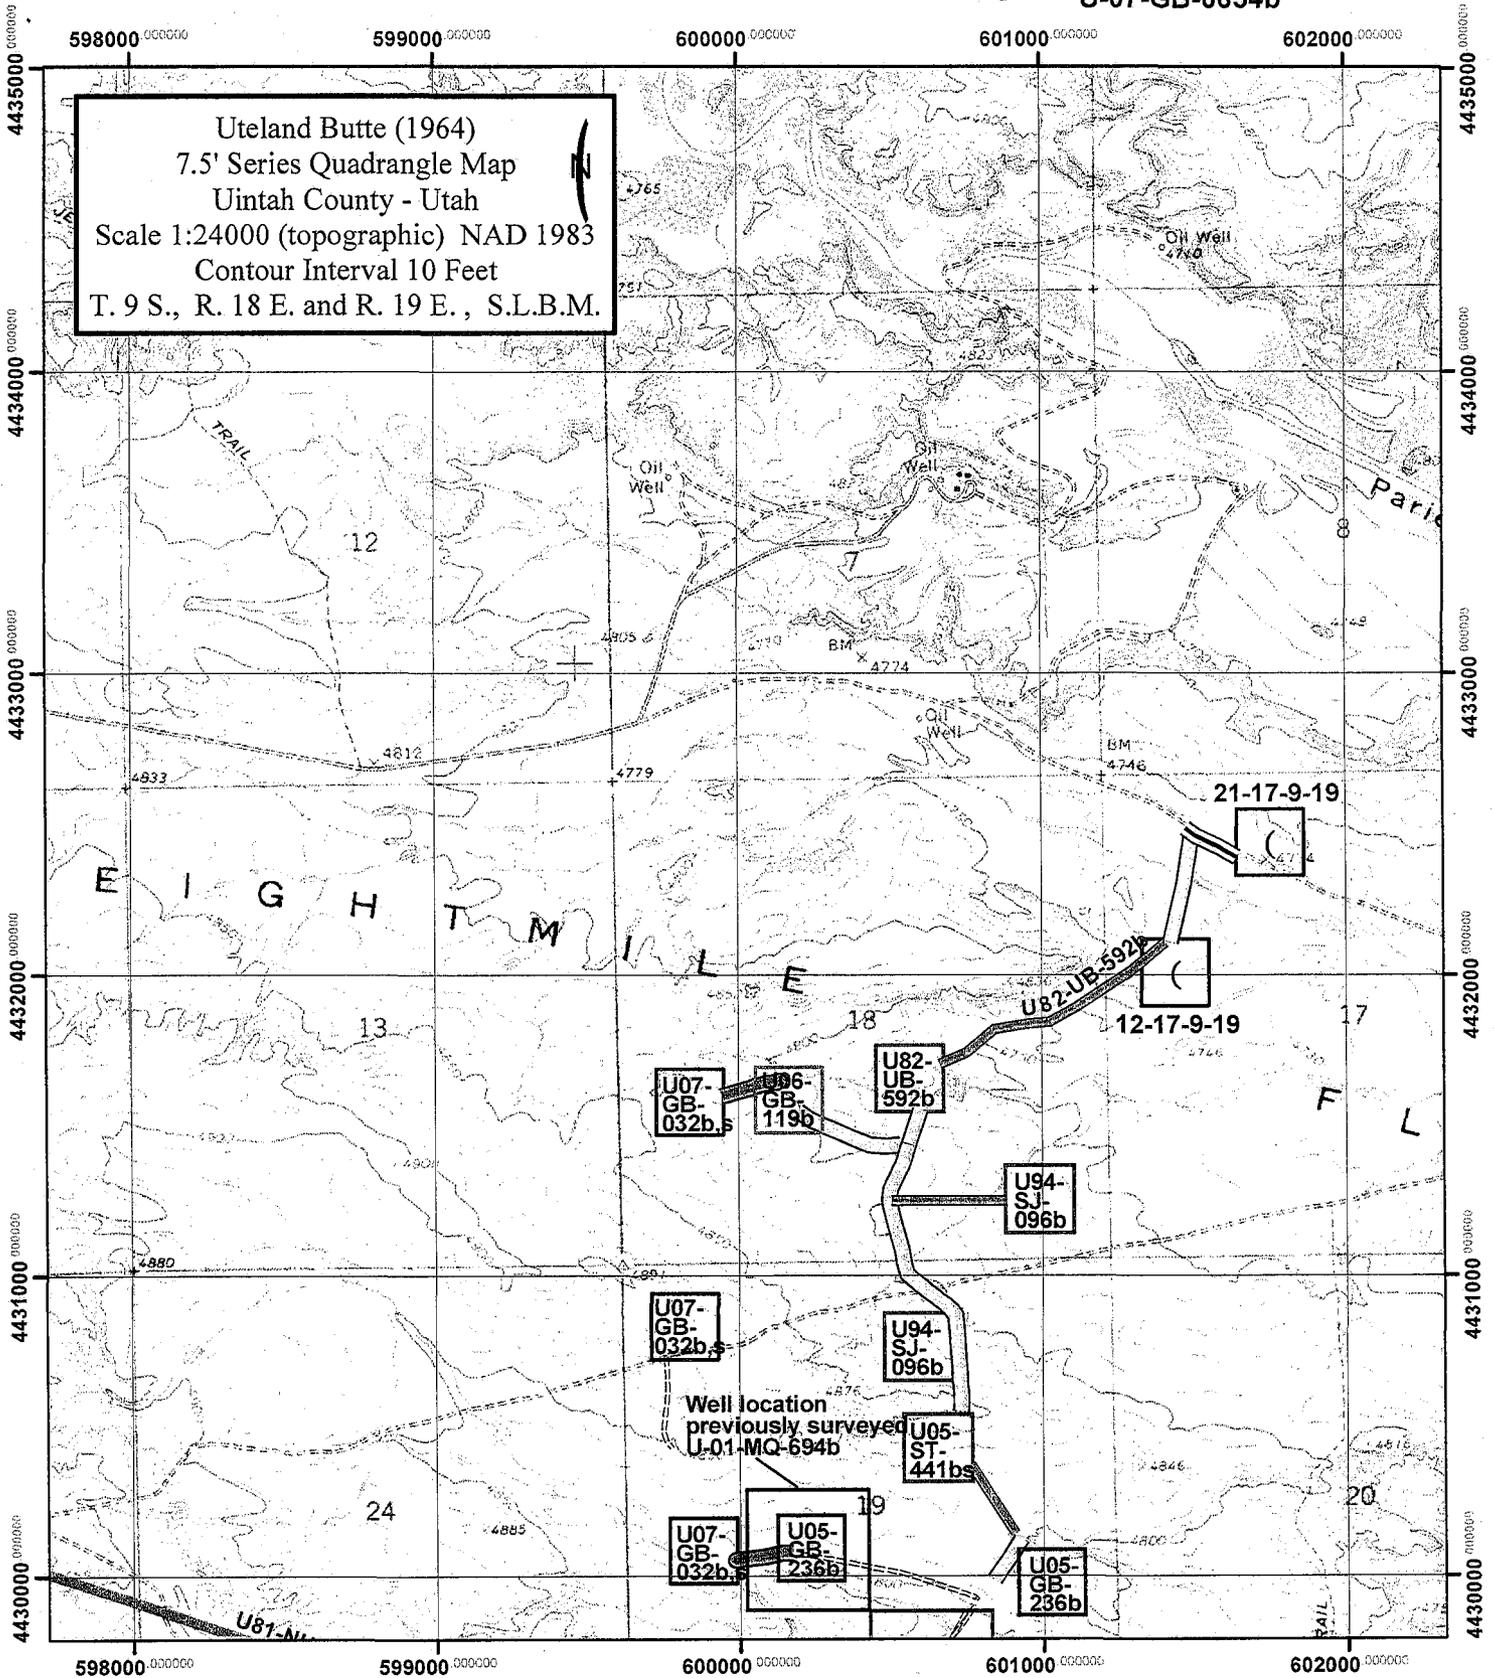


Figure 2. Project location map (2 of 4) for the Class III cultural resources inventory of 11 proposed well locations and related linear routes in Duchesne and Uintah Counties, Utah, for Gasco, Inc. Areas inventoried are highlighted. [Grand River Institute Project #2762, July 13, 2007]

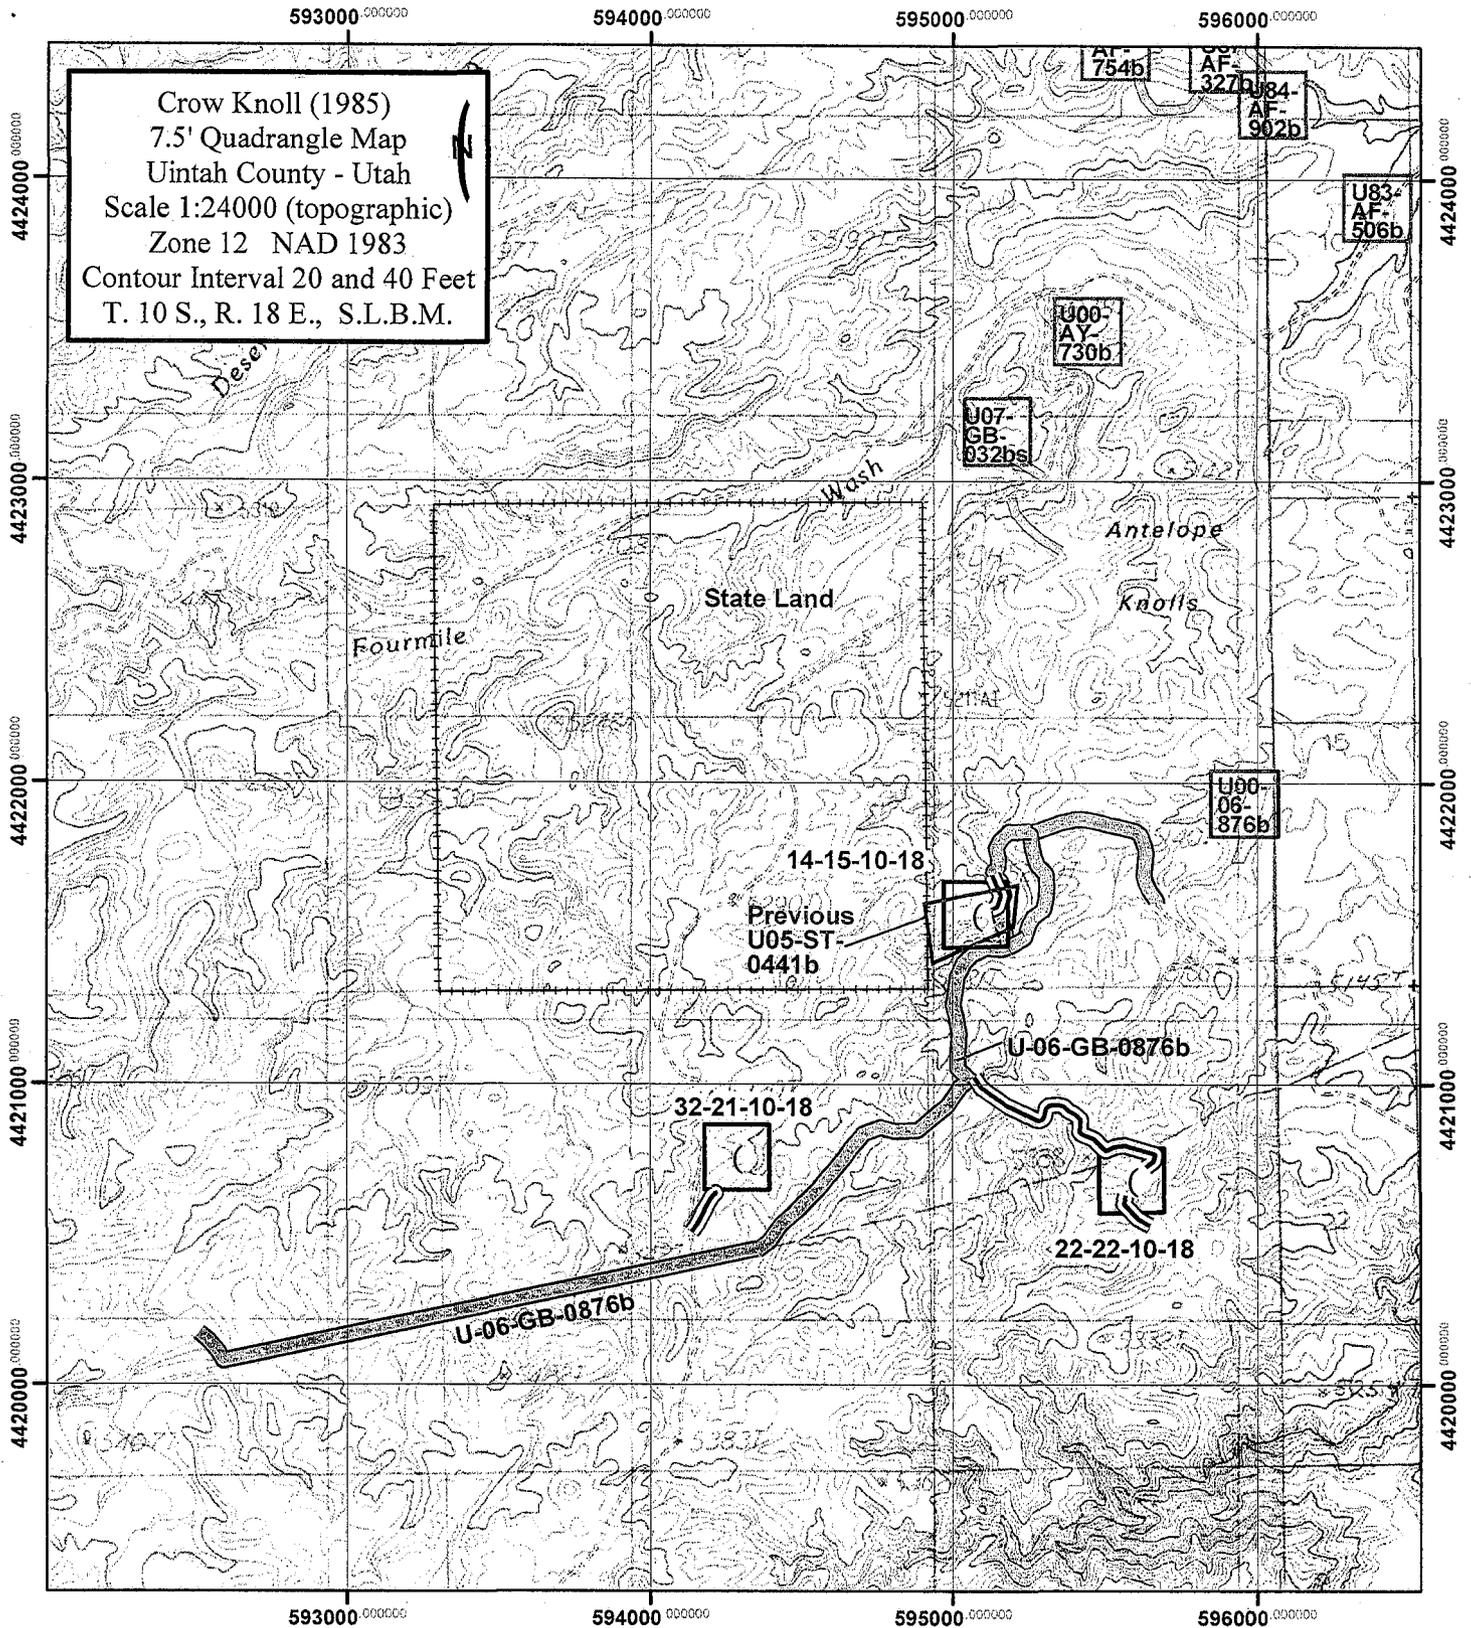


Figure 3. Project location map (3 of 4) for the Class III cultural resources inventory of 11 proposed well locations and related linear routes in Duchesne and Uintah Counties, Utah, for Gasco, Inc. Areas inventoried are highlighted. [Grand River Institute Project #2762, July 13, 2007]

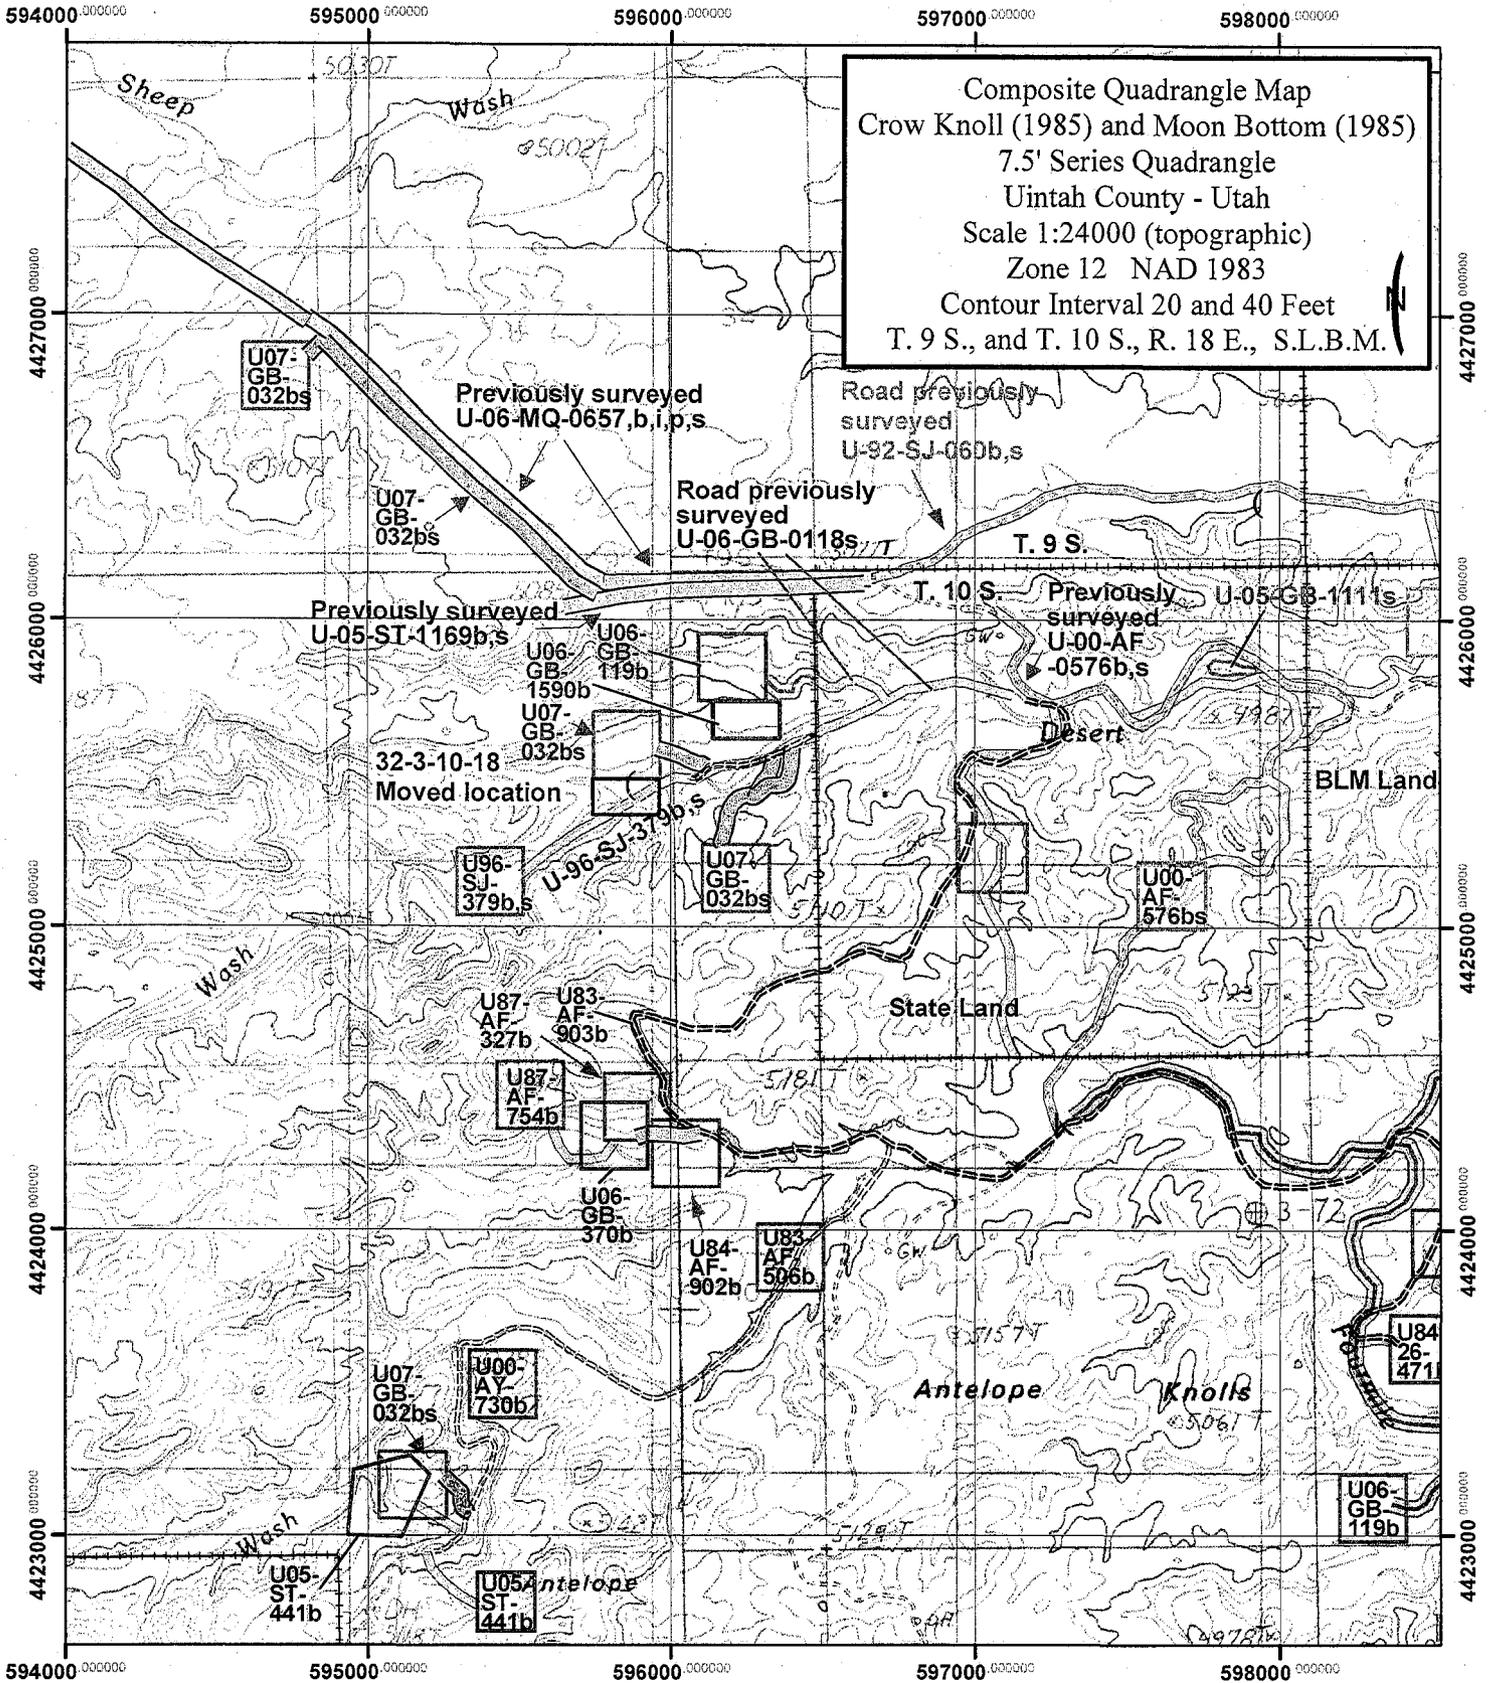


Figure 4. Project location map (4 of 4) for the Class III cultural resources inventory of 11 proposed well locations and related linear routes in Duchesne and Uintah Counties, Utah, for Gasco, Inc. Area inventoried is highlighted. [Grand River Institute Project #2762, July 13, 2007]

Files Search

Files searches were conducted through BLM and UDSH. Previous projects in the areas near the inventory blocks and linear routes are numerous and generally relate to oil and gas development. Those that are adjacent to the project areas are listed below (Table 2).

Table 2. List of previous projects near or adjacent to project's discrete areas.

Well Designation	Associated Previous Project Reference
Fed. #12-17-9-19	None
Fed. #21-17-9-19	U-82-UB-592b
Wilkin Ridge Fed. #31-19-10-17	U-06-GB-120b
Wilkin Ridge Fed. #24-30-10-17	None
Wilkin Ridge Fed. #31-30-10-17	U-99-SC-357b
Wilkin Ridge Fed. #22-31-10-17	None
Wilkin Ridge Fed. #24-31-10-17	U-06-GB-120b
Uteland Fed. #32-3-10-18 (moved location)	U-07-GB-023bs
Antelope Fed. #14-15-10-18	U-05-ST-0441b, U-06-GB-0876b
Fed. #32-21-10-18	U-06-GB-0876b
Fed. #22-22-10-18	U-06-GB-0876b

The files search indicated that no sites were previously recorded within the 10-acre block surveyed for the well locations or the 200 foot-wide corridors inspected for the access roads or pipeline routes.

Few sites have been previously recorded within a mile of the projects' discrete areas. All those that are nearby are small prehistoric open lithic scatters (42UN1209, 42UN2290, 42UN2291 and 42UN5533).

Regional archaeological studies suggest nearly continuous human occupation of northeastern Utah for the past 12,000 years. Evidence of the Paleoindian Tradition, the Archaic Tradition, Fremont Culture, and Protohistoric/Historic Utes has been found. Historic records suggest occupation or use by EuroAmerican trappers, settlers, miners, and ranchers as well.

Overviews of the prehistory and history of the region are provided in the Utah BLM Cultural Resource Series No. 11, "Archaeological Inventory in the Seep Ridge Cultural Study Tract, Uintah County, Northeastern Utah with a Regional Predictive Model for Site Locations" (Larralde and Chandler 1980), and in "Cultural Resources Existing Data Inventory Vernal District, Utah" (Jones and Mackay 1980).

Study Objectives

The purpose of the study was to identify and record all cultural resources within the areas of potential impact and to assess their significance and eligibility to the National Register of Historic Places (NRHP). The statements of significance included in this report are field assessments made in support of recommendations to the BLM and State Historic Preservation Officer (SHPO), and the final determination of site significance is made by the BLM in consultation with the SHPO.

Paleontological resources were also considered in the inspection. However, a final evaluation of those resources must be provided by a paleontologist permitted by Utah.

Field Methods

A Class III, 100% pedestrian, cultural resources survey of the proposed well locations was made by walking a series of concentric circles around the flagged centers to diameters of 750 feet. The related access and pipeline routes not included within the 10-acre study plots (with the exception of Fed 32-3-10-18, which was relocated and needed only a 5-acre block) were surveyed by walking four parallel transects spaced at 15m intervals and centered on the flagged lines to cover corridors 200 feet wide.

Cultural resources were sought as surface exposures and were characterized as sites or isolated finds. Sites were defined by the presence of six or more artifacts and/or significant feature(s) indicative of patterned human activity. Isolated finds were defined by the presence of 1 to 5 artifacts apparently of surficial nature. Cultural resources encountered were to be recorded to standards set by the Preservation Office of the Utah Division of State History (UDSH).

The basic approach to the data collection was the continuous mapping of observed artifacts and features by recording UTM coordinates (NAD 83 Datum) using a Trimble Geo XT. Site maps were created using corrected data and ARCMAP. Photographs were taken at each site and included general views and specific artifacts or features. Field notes and photo negatives are filed at Grand River Institute, while the photographs are submitted to the BLM and UDSH. No artifacts were collected.

Study Findings

As expected, limited cultural resources were encountered during the survey. This portion of the report presents a discussion of site significance evaluation, describes the sites and provides their field evaluations. Appendix A contains isolated find forms for the two recorded occurrences.

Site Significance

The National Historic Preservation Act of 1966 (NHPA) directs federal agencies to ensure that federally-initiated or authorized actions do not inadvertently disturb or destroy significant cultural resource values. Significance is a quality of cultural resource properties that qualifies them for inclusion in the NRHP. The statements of significance included in this report are field assessments to support recommendations to the BLM and State Historic Preservation Officer (SHPO). The final determination of site significance is made by the controlling agencies in consultation with the SHPO and the Keeper of the Register.

The Code of Federal Regulations was used as a guide for the in-field site evaluations. Titles 36 CFR 50, 36 CFR 800, and 36 CFR 64 are concerned with the concepts of significance and (possible) historic value of cultural resources. Titles 36 CFR 65 and 36 CFR 66 provide standards for the conduct of significant and scientific data recovery activities. Finally, Title 36 CFR 60.4 establishes the measure of significance that is critical to the determination of a site's NRHP eligibility, which is used to assess a site's research potential:

The quality of significance in American history, architecture, archaeology, and culture is present in districts, sites, buildings, structures, and objects of State and local importance that possess integrity of location, design, setting, materials, workmanship, feeling, and association, and **a)** that are associated with events that have made a significant contribution to the broad patterns of history; or **b)** that are associated with the lives of persons significant in our past; or **c)** that embody the distinctive characteristics of a type, period, or method of construction, or that represent the work of a master, or that possess high artistic values, or that represent a significant and distinguishable entity whose components may lack individual distinction; or **d)** that have yielded, or may be likely to yield, information important in the prehistory or history.

No significant sites were observed within the project areas. However, two isolated finds were recorded and are described herein:

Isolated Find #1) Historic trash scatter consisting of five cans (1940's to 1950's), 1 jar and wood scraps (pieces of 4 x 4 and 1 x ??)

Isolated Find #2) Prehistoric tested cobbles/core fragments (2) of greenstone.

Summary of Site Evaluations and Management Recommendations

The eligibility determination and consultation process is guided by Section 106 of the NHPA (36 CFR 60, 63, and 800). Inventory to identify, evaluate, and mitigate potential effects to cultural resources affected by an undertaking is the first step in the Section 106 process. BLM actions cannot be authorized until the Section 106 process is completed (36 CFR 800.3). In brief, the inventory recorded two prehistoric sites. Neither were considered significant resources and are field evaluated as not eligible for nomination to the National Register of Historic Places. Accordingly, archaeological clearance is recommended for the proposed wells, new roads, and pipelines

References

Jones, Kevin T. and K.L. Mackay

1980 Cultural Resources Existing Data Inventory Vernal District, Utah. Report of Investigations 80-18, University of Utah, Salt Lake City.

Larralde, Signa L. and Susan M. Chandler

1980 Archaeological inventory in the Seep Ridge Cultural Study Tract, Uintah County, Utah. In: Utah BLM Cultural Resource Series No. 11. Bureau of Land Management, Salt Lake City.

Rigby, J. Keith

1976 Northern Colorado Plateau. Kendall/Hunt Publishing Company. Dubuque.

APPENDIX A: Cultural Resources Location Data and IMACS Forms

Table A-1. Location data for newly recorded isolated finds.

Site Number	Site Type	UTM Location NAD 83 (Zone 12)
IF-1	Historic trash	580915mE; 4416961mN
IF-2	Tested cobbles (2)	601779mE; 4432470mN

PALEONTOLOGY EVALUATION SHEET

PROJECT: GASCO ENERGY Well - Federal #21-17-9-19

LOCATION: Twenty miles south, southeast of Roosevelt, Utah in 751' FNL 1781' FWL Section 17, T 9S, R 19 E, Uinta County, Utah

OWNERSHIP: PRIV[] STATE[] BLM[X] USFS[] NPS[] IND[] MIL[] OTHER[]

DATE: July 26, 2007

GEOLOGY/TOPOGRAPHY: Rock exposures are sandstones and mudstones of the upper part of the lower member of the Uinta Formation, Upper Eocene age. Well pad sits next to and southwest of HF#1-17, just north of the Pariette Road. Road and pipeline come in from the southwest. The surface is a mix of weathered Uinta Formation, alluvium, and gravel.

PALEONTOLOGY SURVEY: YES [X] NO Survey [] PARTIAL Survey []
Surveyed rock exposures a long the road, pipeline and in the well pad area.

SURVEY RESULTS: Invertebrate [] Plant [] Vertebrate [] Trace [] No Fossils Found [X]

PALEONTOLOGY SENSITIVITY: HIGH [] MEDIUM [x] LOW [X] (PROJECT SPECIFIC)


MITIGATION RECOMMENDATIONS: NONE [X] OTHER [] (SEE BELOW)

No recommendations are being made.

There is always a chance of encountering vertebrate fossil when working in the Uinta Formation. If significant vertebrate fossils (mammals, crocodiles, complete turtle shells, etc.) are encountered during construction, work should stop in that area and a paleontologist contacted to evaluate the material discovered.

EVALUATION BY PALEONTOLOGIST: Alden H. Hamblin

A.H. Hamblin Paleontological Consulting, 3793 N. Minersville Highway, Cedar City, Utah 84720 (435) 867-8355
Utah State Paleontological Permit # 07-355, BLM paleontological Resources Permit # UT-S-05-02.
Utah Professional Geologist License - 5223011-2250.

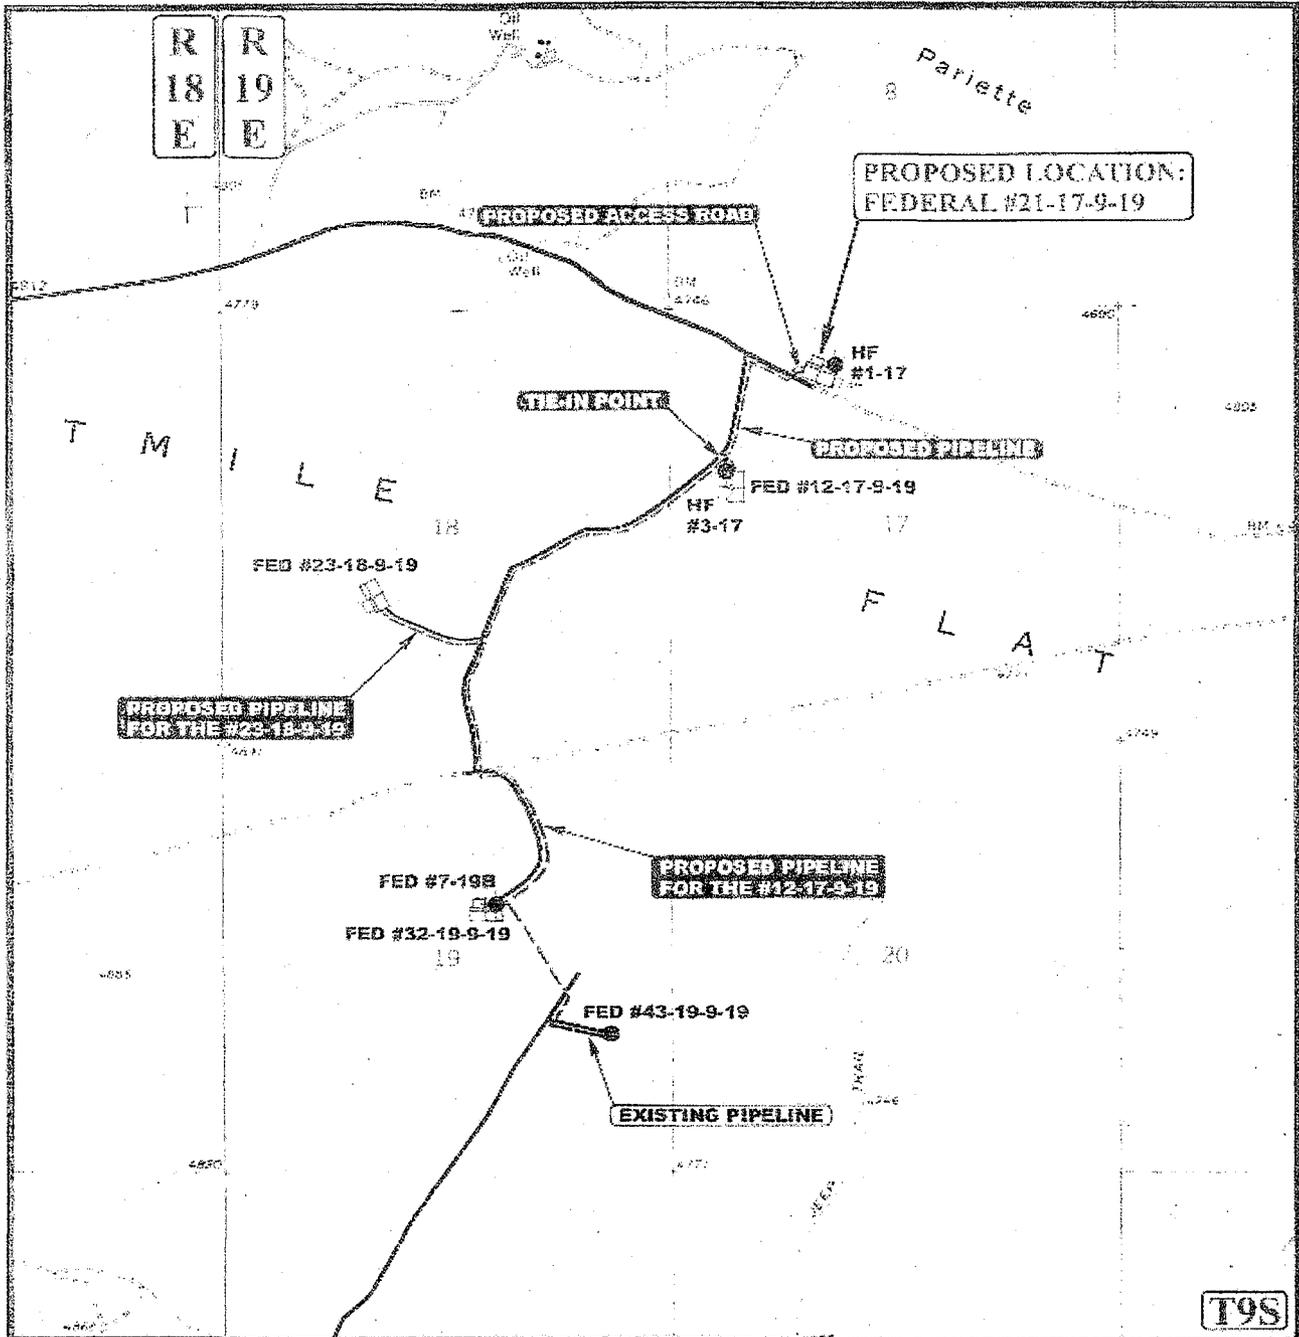

PROPOSED LOCATION:
FEDERAL #21-17-9-19

PROPOSED PIPELINE
FOR THE #23-18-9-19

PROPOSED PIPELINE
FOR THE #12-17-9-19

EXISTING PIPELINE

APPROXIMATE TOTAL PIPELINE DISTANCE = 1,947' +/-

LEGEND:

	PROPOSED ACCESS ROAD
	EXISTING PIPELINE
	PROPOSED PIPELINE
	PROPOSED PIPELINE SERVING OTHER WELLS



GASCO PRODUCTION COMPANY
FEDERAL #21-17-9-19
SECTION 17, T9S, R19E, S.L.B.&M.
751' FNL 1781' FWL

U&Ls
Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 • FAX (435) 789-1815

TOPOGRAPHIC MAP	06	19	07	D 10100
	MONTH	DAY	YEAR	
SCALE: 1" = 2000'	DRAWN BY: A.A.		REVISED: 9-12-07 ZL	

T9S

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 12/03/2007

API NO. ASSIGNED: 43-047-39801

WELL NAME: FEDERAL 21-17-9-19
 OPERATOR: GASCO PRODUCTION (N2575)
 CONTACT: VENESSA LANGMACHER

PHONE NUMBER: 303-857-9999

PROPOSED LOCATION:

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

NENW 17 090S 190E
 SURFACE: 0751 FNL 1781 FWL
 BOTTOM: 0751 FNL 1781 FWL
 COUNTY: UINTAH
 LATITUDE: 40.03609 LONGITUDE: -109.8067
 UTM SURF EASTINGS: 601813 NORTHINGS: 4432234
 FIELD NAME: PARIETTE BENCH (640)

LEASE TYPE: 1 - Federal
 LEASE NUMBER: UTU-0017991
 SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: BLKHK
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]
(No. UT-1233)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 43-1721)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)


LOCATION AND SITING:

- _____ R649-2-3.
- Unit: _____
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- _____ R649-3-3. Exception
- _____ Drilling Unit
Board Cause No: _____
Eff Date: _____
Siting: _____
- _____ R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: _____

1- Section Approval
2- Spacing Shp

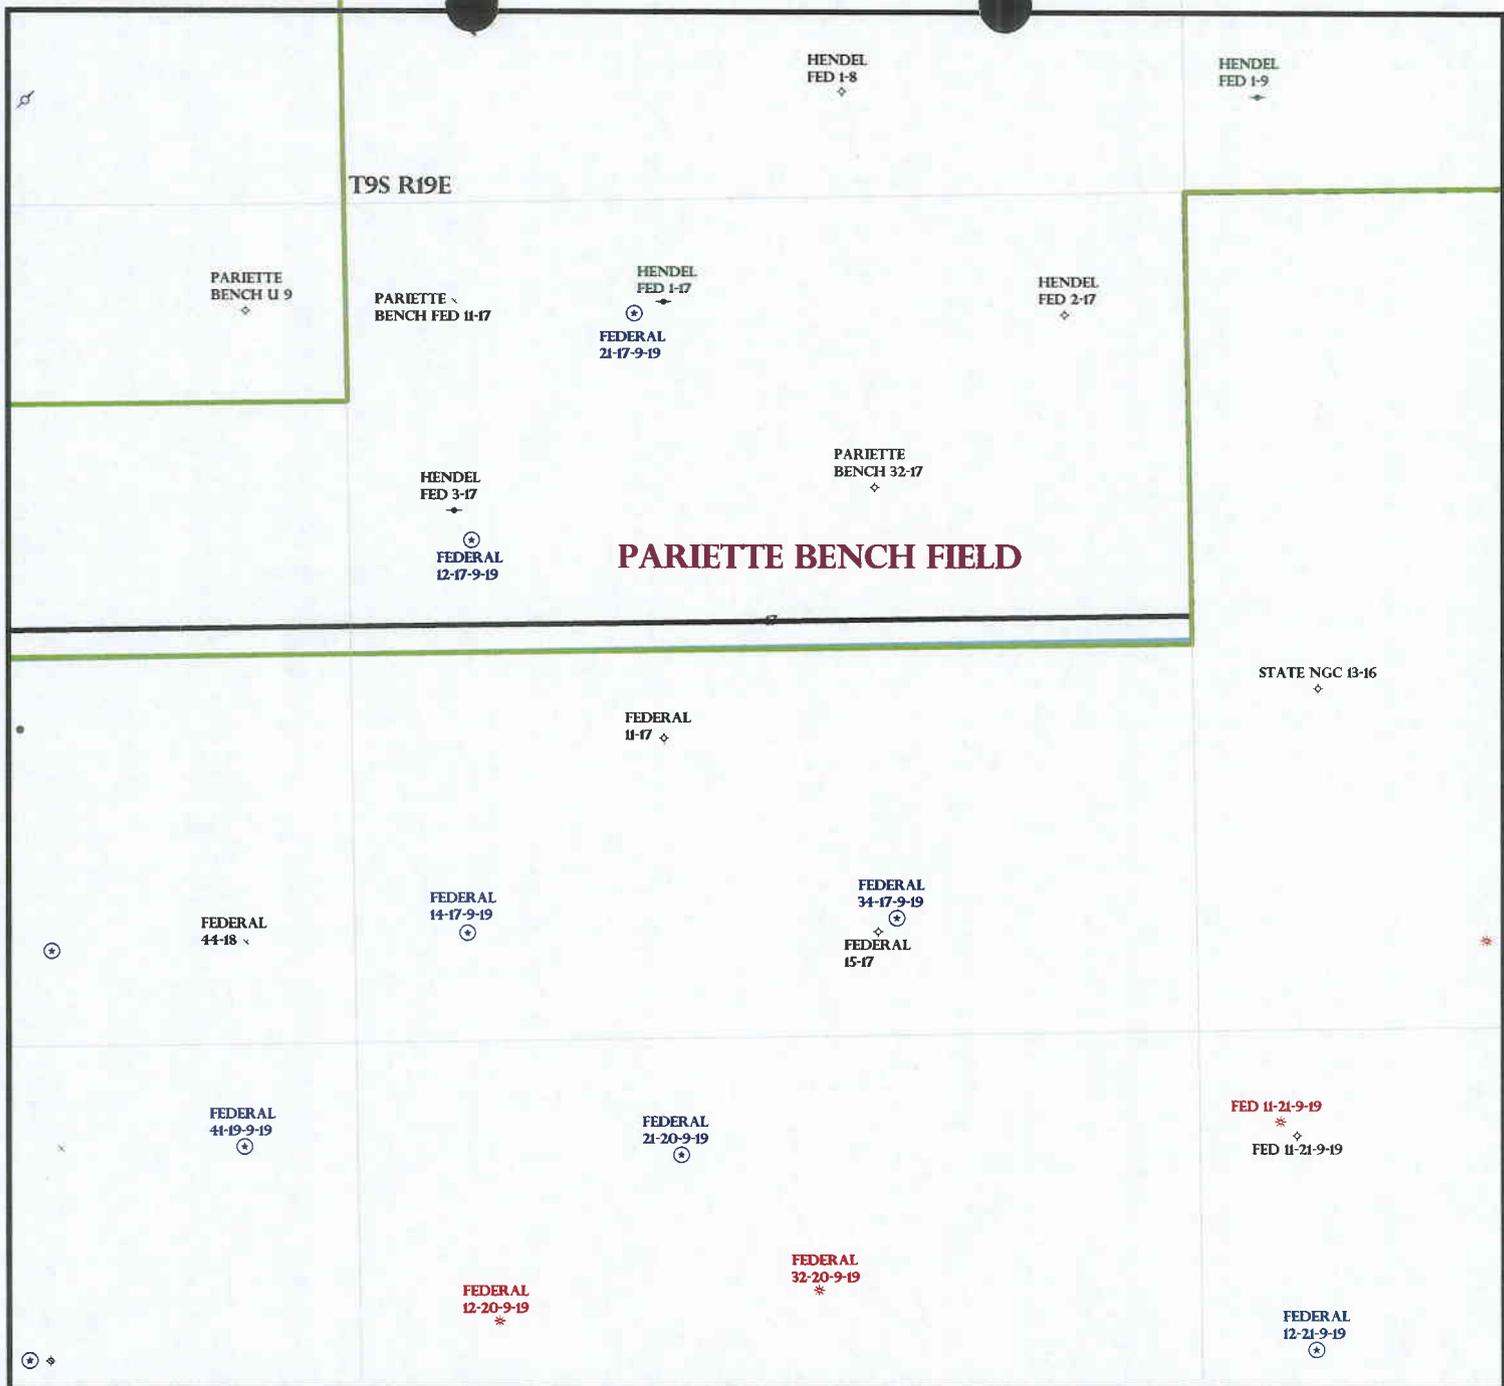

OPERATOR: GASCO PROD CO (N2575)

SEC: 17 T.9S R. 19E

FIELD: PARIETTE BENCH (640)

COUNTY: UINTAH

SPACING: R649-3-2 / GENERAL SITING



OIL, GAS & MINING



PREPARED BY: DIANA MASON
DATE: 05-DECEMBER-2007

Wells Status

- ◇ GAS INJECTION
- ✳ GAS STORAGE
- ⊗ LOCATION ABANDONED
- ⊕ NEW LOCATION
- ◇ PLUGGED & ABANDONED
- ✳ PRODUCING GAS
- PRODUCING OIL
- ✳ SHUT-IN GAS
- SHUT-IN OIL
- ⊗ TEMP. ABANDONED
- TEST WELL
- △ WATER INJECTION
- ⊕ WATER SUPPLY
- ⊖ WATER DISPOSAL
- ⊕ DRILLING

Field Status

- ▬ ABANDONED
- ▬ ACTIVE
- ▬ COMBINED
- ▬ INACTIVE
- ▬ PROPOSED
- ▬ STORAGE
- ▬ TERMINATED

Unit Status

- ▬ EXPLORATORY
- ▬ GAS STORAGE
- ▬ NF PP OIL
- ▬ NF SECONDARY
- ▬ PENDING
- ▬ PI OIL
- ▬ PP GAS
- ▬ PP GEOTHERML
- ▬ PP OIL
- ▬ SECONDARY
- ▬ TERMINATED



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah
DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil Gas and Mining

JOHN R. BAZA
Division Director

December 6, 2007

Gasco Production Company
8 Inverness Drive East, Suite 100
Englewood, CO 80112

Re: Federal 21-17-9-19 Well, 751' FNL, 1781' FWL, NE NW, Sec. 17, T. 9 South,
R. 19 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-39801.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal Office

Operator: Gasco Production Company

Well Name & Number Federal 21-17-9-19

API Number: 43-047-39801

Lease: UTU-0017991

Location: NE NW Sec. 17 T. 9 South R. 19 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281 office (801) 733-0983 home

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

CONFIDENTIAL

SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-0017991
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: NA
		7. UNIT or CA AGREEMENT NAME: NA
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____	8. WELL NAME and NUMBER: Federal 21-17-9-19	
2. NAME OF OPERATOR: Gasco Production Company		9. API NUMBER: 4304739801
3. ADDRESS OF OPERATOR: 8 Inverness Dr E, Ste 100 CITY Englewood STATE Co ZIP 80112	PHONE NUMBER: (303) 483-0044	10. FIELD AND POOL, OR WILDCAT:
4. LOCATION OF WELL FOOTAGES AT SURFACE: 751' FNL & 1781' FWL		COUNTY: Uintah
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NENW 17 9 19		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____ <input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON	<input type="checkbox"/> TUBING REPAIR
<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> WATER SHUT-OFF	<input checked="" type="checkbox"/> OTHER: <u>Extend Permit</u>
<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK		
<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)		
<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE		
<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION		

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Gasco Production Company would like to request a one year extension on this APD from the date it is due to expire (12/6/2008)

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 12-08-08
By: [Signature]

NAME (PLEASE PRINT) <u>Jessica Berg</u>	TITLE <u>Production Clerk</u>
SIGNATURE <u>[Signature]</u>	DATE <u>12/1/2008</u>

(This space for State use only)

COPY SENT TO OPERATOR

Date: 12.9.2008

Initials: K5

(See Instructions on Reverse Side)

RECEIVED

DEC 02 2008

DIV. OF OIL, GAS & MINING



**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-047-39801
Well Name: Federal 21-17-9-19
Location: NE NW of Sec 17-T9S-R19E Uintah County, UT
Company Permit Issued to: Gasco Production Company
Date Original Permit Issued: 12/6/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No



 Signature

12/1/2008

 Date

Title: Production Clerk

Representing: Gasco Production Company

**RECEIVED
DEC 02 2008**

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-0017991
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: FEDERAL 21-17-9-19
2. NAME OF OPERATOR: GASCO PRODUCTION COMPANY	9. API NUMBER: 43047398010000
3. ADDRESS OF OPERATOR: 8 Inverness Dr. East, Suite 100 , Englewood, CO, 80112	PHONE NUMBER: 303 483-0044 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0751 FNL 1781 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NENW Section: 17 Township: 09.0S Range: 19.0E Meridian: S	9. FIELD and POOL or WILDCAT: PARIETTE BENCH COUNTY: UINTAH STATE: UTAH


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 3/6/2010	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: _____

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Approved by the Utah Division of Oil, Gas and Mining

Date: November 30, 2009

By: 

NAME (PLEASE PRINT) Roger Knight	PHONE NUMBER 303 996-1803	TITLE EHS Supervisor
SIGNATURE N/A	DATE 11/30/2009	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047398010000

API: 43047398010000

Well Name: FEDERAL 21-17-9-19

Location: 0751 FNL 1781 FWL QTR NENW SEC 17 TWP 090S RNG 190E MER S

Company Permit Issued to: GASCO PRODUCTION COMPANY

Date Original Permit Issued: 12/6/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Roger Knight

Date: 11/30/2009

Title: EHS Supervisor **Representing:** GASCO PRODUCTION COMPANY

Date: November 30, 2009

By: 

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-0017991
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: FEDERAL 21-17-9-19
2. NAME OF OPERATOR: GASCO PRODUCTION COMPANY	9. API NUMBER: 43047398010000
3. ADDRESS OF OPERATOR: 8 Inverness Dr. East, Suite 100 , Englewood, CO, 80112	PHONE NUMBER: 303 483-0044 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0751 FNL 1781 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NENW Section: 17 Township: 09.0S Range: 19.0E Meridian: S	9. FIELD and POOL or WILDCAT: PARIETTE BENCH COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 12/6/2011	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

**Approved by the
 Utah Division of
 Oil, Gas and Mining**

Date: 12/06/2010
By:

NAME (PLEASE PRINT) Roger Knight	PHONE NUMBER 303 996-1803	TITLE EHS Supervisor
SIGNATURE N/A		DATE 12/6/2010



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047398010000

API: 43047398010000

Well Name: FEDERAL 21-17-9-19

Location: 0751 FNL 1781 FWL QTR NENW SEC 17 TWP 090S RNG 190E MER S

Company Permit Issued to: GASCO PRODUCTION COMPANY

Date Original Permit Issued: 12/6/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Roger Knight

Date: 12/6/2010

Title: EHS Supervisor **Representing:** GASCO PRODUCTION COMPANY

Date: 12/06/2010

By: 

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9			
SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-0017991			
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:			
1. TYPE OF WELL Gas Well		7. UNIT or CA AGREEMENT NAME:			
2. NAME OF OPERATOR: GASCO PRODUCTION COMPANY		8. WELL NAME and NUMBER: FEDERAL 21-17-9-19			
3. ADDRESS OF OPERATOR: 8 Inverness Dr. East, Suite 100 , Englewood, CO, 80112		9. API NUMBER: 43047398010000			
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0751 FNL 1781 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NENW Section: 17 Township: 09.0S Range: 19.0E Meridian: S		9. FIELD and POOL or WILDCAT: PARIETTE BENCH			
		COUNTY: UINTAH			
		STATE: UTAH			
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA					
TYPE OF SUBMISSION	TYPE OF ACTION				
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 12/6/2012 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 50px;" type="text"/> </td> </tr> </table>		<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 50px;" type="text"/>
<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 50px;" type="text"/>			
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.					
		<p style="color: red; font-weight: bold; margin: 0;">Approved by the Utah Division of Oil, Gas and Mining</p> <p style="color: red; font-weight: bold; margin: 0;">Date: <u>12/08/2011</u></p> <p style="color: red; font-weight: bold; margin: 0;">By: <u></u></p>			
NAME (PLEASE PRINT) Roger Knight	PHONE NUMBER 303 996-1803	TITLE EHS Supervisor			
SIGNATURE N/A	DATE 12/5/2011				



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047398010000

API: 43047398010000

Well Name: FEDERAL 21-17-9-19

Location: 0751 FNL 1781 FWL QTR NENW SEC 17 TWNP 090S RNG 190E MER S

Company Permit Issued to: GASCO PRODUCTION COMPANY

Date Original Permit Issued: 12/6/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Roger Knight

Date: 12/5/2011

Title: EHS Supervisor **Representing:** GASCO PRODUCTION COMPANY

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9			
SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-0017991			
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:			
		7. UNIT or CA AGREEMENT NAME:			
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: FEDERAL 21-17-9-19				
2. NAME OF OPERATOR: GASCO PRODUCTION COMPANY	9. API NUMBER: 43047398010000				
3. ADDRESS OF OPERATOR: 8 Inverness Dr. East, Suite 100 , Englewood, CO, 80112	PHONE NUMBER: 303 483-0044 Ext	9. FIELD and POOL or WILDCAT: PARIETTE BENCH			
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0751 FNL 1781 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NENW Section: 17 Township: 09.0S Range: 19.0E Meridian: S	COUNTY: UINTAH				
		STATE: UTAH			
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA					
TYPE OF SUBMISSION	TYPE OF ACTION				
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 12/6/2012 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/> </td> </tr> </table>		<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>
<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>			
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.					
		<p style="color: red; font-weight: bold; margin: 0;"> Approved by the Utah Division of Oil, Gas and Mining </p> <p style="color: red; font-weight: bold; margin: 0;"> Date: <u>12/08/2011</u> </p> <p style="color: red; font-weight: bold; margin: 0;"> By: <u></u> </p>			
NAME (PLEASE PRINT) Roger Knight	PHONE NUMBER 303 996-1803	TITLE EHS Supervisor			
SIGNATURE N/A	DATE 12/5/2011				



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047398010000

API: 43047398010000

Well Name: FEDERAL 21-17-9-19

Location: 0751 FNL 1781 FWL QTR NENW SEC 17 TWNP 090S RNG 190E MER S

Company Permit Issued to: GASCO PRODUCTION COMPANY

Date Original Permit Issued: 12/6/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Roger Knight

Date: 12/5/2011

Title: EHS Supervisor **Representing:** GASCO PRODUCTION COMPANY

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-0017991
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: FEDERAL 21-17-9-19	
2. NAME OF OPERATOR: GASCO PRODUCTION COMPANY	9. API NUMBER: 43047398010000	
3. ADDRESS OF OPERATOR: 8 Inverness Dr. East, Suite 100 , Englewood, CO, 80112	PHONE NUMBER: 303 483-0044 Ext	9. FIELD and POOL or WILDCAT: PARIETTE BENCH
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0751 FNL 1781 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NENW Section: 17 Township: 09.0S Range: 19.0E Meridian: S	COUNTY: UINTAH	
		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 12/6/2012 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	
	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.		
		<p style="color: red; font-weight: bold;">Approved by the Utah Division of Oil, Gas and Mining</p> <p style="color: red; font-weight: bold;">Date: <u>12/08/2011</u></p> <p style="color: red; font-weight: bold;">By: <u></u></p>
NAME (PLEASE PRINT) Roger Knight	PHONE NUMBER 303 996-1803	TITLE EHS Supervisor
SIGNATURE N/A	DATE 12/5/2011	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047398010000

API: 43047398010000

Well Name: FEDERAL 21-17-9-19

Location: 0751 FNL 1781 FWL QTR NENW SEC 17 TWNP 090S RNG 190E MER S

Company Permit Issued to: GASCO PRODUCTION COMPANY

Date Original Permit Issued: 12/6/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Roger Knight

Date: 12/5/2011

Title: EHS Supervisor **Representing:** GASCO PRODUCTION COMPANY

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
5.LEASE DESIGNATION AND SERIAL NUMBER: UTU-0017991	
6. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
7.UNIT or CA AGREEMENT NAME:	
1. TYPE OF WELL Gas Well	
8. WELL NAME and NUMBER: FEDERAL 21-17-9-19	
2. NAME OF OPERATOR:	
9. API NUMBER: 43047398010000	
3. ADDRESS OF OPERATOR: _____ PHONE NUMBER: _____ Ext	
9. FIELD and POOL or WILDCAT: PARIETTE BENCH	
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0751 FNL 1781 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NENW Section: 17 Township: 09.0S Range: 19.0E Meridian: S	
COUNTY: UINTAH	
STATE: UTAH	


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 12/6/2013	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: December 12, 2012

By: 

NAME (PLEASE PRINT) Roger Knight	PHONE NUMBER 303 996-1803	TITLE EHS Supervisor
SIGNATURE N/A	DATE 12/10/2012	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047398010000

API: 43047398010000

Well Name: FEDERAL 21-17-9-19

Location: 0751 FNL 1781 FWL QTR NENW SEC 17 TWNP 090S RNG 190E MER S

Company Permit Issued to: GASCO PRODUCTION COMPANY

Date Original Permit Issued: 12/6/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

Signature: Roger Knight

Date: 12/10/2012

Title: EHS Supervisor Representing: GASCO PRODUCTION COMPANY



United States Department of the Interior



BUREAU OF LAND MANAGEMENT
Green River District
Vernal Field Office
170 South 500 East
Vernal, UT 84078
<http://www.blm.gov/ut/st/en/fo/vernal.html>

April 1, 2013

IN REPLY REFER TO:
3160 (UTG011)

Roger Knight
Gasco Energy Inc.
7979 Tufts Ave., Suite 1150
Denver, CO 80237

047
43 ~~013~~ 39800

Re: Request to Return APD
Well No. Federal 21-17-9-19
NENW, Sec. 17, T9S, R19E
Uintah County, Utah
Lease No. UTU-017991

Dear Roger:

The Application for Permit to Drill (APD) for the above referenced well received in this office on September 17, 2007, is being returned unapproved per your request to this office in an email message to Natural Resource Specialist William T. Civish Jr. received on February 19, 2013. If you intend to drill at this location at a future date, a new APD must be submitted.

If you have any questions regarding APD processing, please contact Robin R. Hansen at (435) 781-3428.

Sincerely,

/s/ Jerry Kenczka

Jerry Kenczka
Assistant Field Manager
Lands & Resource Minerals

Enclosures

cc: UDOGM

bcc: Well File

RECEIVED

MAY 01 2013

DIV. OF OIL, GAS & MINING



GARY R. HERBERT
Governor

SPENCER J. COX
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

January 28, 2014

Jessica Berg
Gasco Production Company
7979 E Tufts Ave. Ste. 1150
Denver, CO 80237

43 047 39801
Federal 21-17-9-19
9S ME 17

Re: APDs Rescinded for Gasco Production Company,
Uintah & Duchesne County

Dear Ms. Berg:

Enclosed find the list of APDs that is being rescinded. On January 25, 2014, you requested that the division rescind the state approved APD. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded, effective January 25, 2014.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal

4304738857 ANTELOPE FED 33-15-10-18
4304736130 FEDERAL 12-21-9-19
4304738856 FEDERAL 14-20-9-19
→ 4304739801 FEDERAL 21-17-9-19
4304738855 FEDERAL 21-20-9-19
4304738854 FEDERAL 23-20-9-19
4304738580 FEDERAL 31-22-10-18
4304738853 FEDERAL 34-17-9-19
4301350178 GATE CANYON FED 24-15-11-16
4301333438 RYE PATCH FED 22-13
4301333439 RYE PATCH FED 22-44
4301333440 RYE PATCH FED 23-11
4301333441 RYE PATCH FED 23-22
4301333442 RYE PATCH FED 23-32
4301333444 RYE PATCH FED 24-31
4301333445 RYE PATCH FED 24-43
4301333446 RYE PATCH FED 24-44
4304738574 SHEEP WASH FED 32-26-9-18
4304739778 UTELAND FED 43-3-10-18
4301350184 WILKIN RIDGE FED 11-17-10-17
4301333314 WILKIN RIDGE FED 12-33-10-17
4301332756 WILKIN RIDGE FED 14-15-10-17
4301333738 WILKIN RIDGE FED 14-29-10-17
4301333857 WILKIN RIDGE FED 22-31-10-17

4301333886 WILKIN RIDGE FED 24-30-10-17
4301333856 WILKIN RIDGE FED 24-31-10-17
4301333905 WILKIN RIDGE FED 31-19-10-17
4301333855 WILKIN RIDGE FED 31-30-10-17
4301350180 WILKIN RIDGE FED 32-17-10-17
4304739802 WILKIN RIDGE FED 32-21-10-18
4301333739 WILKIN RIDGE FED 34-29-10-17
4301333474 WILKIN RIDGE FED 41-21-10-17
4301334165 WILKIN RIDGE FED 41-27-10-17
4301334245 WILKIN RIDGE FED 41-28-10-17
4301333330 WILKIN RIDGE FED 41-31-10-17
4301334208 WILKIN RIDGE FED 42-7-11-17
4301333870 WILKIN RIDGE FED 43-21-10-17
4301333323 WILKIN RIDGE FED 43-30-10-17
4301333329 WILKIN RIDGE FED 43-31-10-17



Diana Mason <dianawhitney@utah.gov>

RE: Expired APDs

Jessica Berg <jberg@gascoenergy.com>
To: Diana Mason <dianawhitney@utah.gov>

Sat, Jan 25, 2014 at 3:11 PM

Hi Diana,

Thanks for the fyi! I'll get any outstanding renewals in ASAP.

I've had a chance to go through the State APD list, Gasco is no longer pursuing the following locations, please go ahead and rescind the list below.

Hopefully this helps clean things up a bit!

Thanks,

Jessica

- 4304738857 ANTELOPE FED 33-15-10-18
- 4304736130 FEDERAL 12-21-9-19
- 4304738856 FEDERAL 14-20-9-19
- 4304739801 FEDERAL 21-17-9-19
- 4304738855 FEDERAL 21-20-9-19
- 4304738854 FEDERAL 23-20-9-19
- 4304738580 FEDERAL 31-22-10-18
- 4304738853 FEDERAL 34-17-9-19
- 4301350178 GATE CANYON FED 24-15-11-16
- 4301333438 RYE PATCH FED 22-13
- 4301333439 RYE PATCH FED 22-44
- 4301333440 RYE PATCH FED 23-11
- 4301333441 RYE PATCH FED 23-22
- 4301333442 RYE PATCH FED 23-32
- 4301333444 RYE PATCH FED 24-31

4301333445 RYE PATCH FED 24-43
4301333446 RYE PATCH FED 24-44
4304738574 SHEEP WASH FED 32-26-9-18
4304739778 UTELAND FED 43-3-10-18
4301350184 WILKIN RIDGE FED 11-17-10-17
4301333314 WILKIN RIDGE FED 12-33-10-17
4301332756 WILKIN RIDGE FED 14-15-10-17
4301333738 WILKIN RIDGE FED 14-29-10-17
4301333857 WILKIN RIDGE FED 22-31-10-17
4301333886 WILKIN RIDGE FED 24-30-10-17
4301333856 WILKIN RIDGE FED 24-31-10-17
4301333905 WILKIN RIDGE FED 31-19-10-17
4301333855 WILKIN RIDGE FED 31-30-10-17
4301350180 WILKIN RIDGE FED 32-17-10-17
4304739802 WILKIN RIDGE FED 32-21-10-18
4301333739 WILKIN RIDGE FED 34-29-10-17
4301333474 WILKIN RIDGE FED 41-21-10-17
4301334165 WILKIN RIDGE FED 41-27-10-17
4301334245 WILKIN RIDGE FED 41-28-10-17
4301333330 WILKIN RIDGE FED 41-31-10-17
4301334208 WILKIN RIDGE FED 42-7-11-17
4301333870 WILKIN RIDGE FED 43-21-10-17
4301333323 WILKIN RIDGE FED 43-30-10-17
4301333329 WILKIN RIDGE FED 43-31-10-17



GARY R. HERBERT
Governor

SPENCER J. COX
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

January 28, 2014

Jessica Berg
Gasco Production Company
7979 E Tufts Ave. Ste. 1150
Denver, CO 80237

43 047 39801
Fed 21-17-9-19
9S 19E 17

Re: APDs Rescinded for Gasco Production Company,
Uintah & Duchesne County

Dear Ms. Berg:

Enclosed find the list of APDs that is being rescinded. On January 25, 2014, you requested that the division rescind the state approved APD. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded, effective January 25, 2014.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal

4304738857 ANTELOPE FED 33-15-10-18
4304736130 FEDERAL 12-21-9-19
4304738856 FEDERAL 14-20-9-19
→ 4304739801 FEDERAL 21-17-9-19
4304738855 FEDERAL 21-20-9-19
4304738854 FEDERAL 23-20-9-19
4304738580 FEDERAL 31-22-10-18
4304738853 FEDERAL 34-17-9-19
4301350178 GATE CANYON FED 24-15-11-16
4301333438 RYE PATCH FED 22-13
4301333439 RYE PATCH FED 22-44
4301333440 RYE PATCH FED 23-11
4301333441 RYE PATCH FED 23-22
4301333442 RYE PATCH FED 23-32
4301333444 RYE PATCH FED 24-31
4301333445 RYE PATCH FED 24-43
4301333446 RYE PATCH FED 24-44
4304738574 SHEEP WASH FED 32-26-9-18
4304739778 UTELAND FED 43-3-10-18
4301350184 WILKIN RIDGE FED 11-17-10-17
4301333314 WILKIN RIDGE FED 12-33-10-17
4301332756 WILKIN RIDGE FED 14-15-10-17
4301333738 WILKIN RIDGE FED 14-29-10-17
4301333857 WILKIN RIDGE FED 22-31-10-17

4301333886 WILKIN RIDGE FED 24-30-10-17
4301333856 WILKIN RIDGE FED 24-31-10-17
4301333905 WILKIN RIDGE FED 31-19-10-17
4301333855 WILKIN RIDGE FED 31-30-10-17
4301350180 WILKIN RIDGE FED 32-17-10-17
4304739802 WILKIN RIDGE FED 32-21-10-18
4301333739 WILKIN RIDGE FED 34-29-10-17
4301333474 WILKIN RIDGE FED 41-21-10-17
4301334165 WILKIN RIDGE FED 41-27-10-17
4301334245 WILKIN RIDGE FED 41-28-10-17
4301333330 WILKIN RIDGE FED 41-31-10-17
4301334208 WILKIN RIDGE FED 42-7-11-17
4301333870 WILKIN RIDGE FED 43-21-10-17
4301333323 WILKIN RIDGE FED 43-30-10-17
4301333329 WILKIN RIDGE FED 43-31-10-17



Diana Mason <dianawhitney@utah.gov>

RE: Expired APDs

Jessica Berg <jberg@gascoenergy.com>
To: Diana Mason <dianawhitney@utah.gov>

Sat, Jan 25, 2014 at 3:11 PM

Hi Diana,

Thanks for the fyi! I'll get any outstanding renewals in ASAP.

I've had a chance to go through the State APD list, Gasco is no longer pursuing the following locations, please go ahead and rescind the list below.

Hopefully this helps clean things up a bit!

Thanks,

Jessica

4304738857 ANTELOPE FED 33-15-10-18
4304736130 FEDERAL 12-21-9-19
4304738856 FEDERAL 14-20-9-19
4304739801 FEDERAL 21-17-9-19
4304738855 FEDERAL 21-20-9-19
4304738854 FEDERAL 23-20-9-19
4304738580 FEDERAL 31-22-10-18
4304738853 FEDERAL 34-17-9-19
4301350178 GATE CANYON FED 24-15-11-16
4301333438 RYE PATCH FED 22-13
4301333439 RYE PATCH FED 22-44
4301333440 RYE PATCH FED 23-11
4301333441 RYE PATCH FED 23-22
4301333442 RYE PATCH FED 23-32
4301333444 RYE PATCH FED 24-31

4301333445 RYE PATCH FED 24-43
4301333446 RYE PATCH FED 24-44
4304738574 SHEEP WASH FED 32-26-9-18
4304739778 UTELAND FED 43-3-10-18
4301350184 WILKIN RIDGE FED 11-17-10-17
4301333314 WILKIN RIDGE FED 12-33-10-17
4301332756 WILKIN RIDGE FED 14-15-10-17
4301333738 WILKIN RIDGE FED 14-29-10-17
4301333857 WILKIN RIDGE FED 22-31-10-17
4301333886 WILKIN RIDGE FED 24-30-10-17
4301333856 WILKIN RIDGE FED 24-31-10-17
4301333905 WILKIN RIDGE FED 31-19-10-17
4301333855 WILKIN RIDGE FED 31-30-10-17
4301350180 WILKIN RIDGE FED 32-17-10-17
4304739802 WILKIN RIDGE FED 32-21-10-18
4301333739 WILKIN RIDGE FED 34-29-10-17
4301333474 WILKIN RIDGE FED 41-21-10-17
4301334165 WILKIN RIDGE FED 41-27-10-17
4301334245 WILKIN RIDGE FED 41-28-10-17
4301333330 WILKIN RIDGE FED 41-31-10-17
4301334208 WILKIN RIDGE FED 42-7-11-17
4301333870 WILKIN RIDGE FED 43-21-10-17
4301333323 WILKIN RIDGE FED 43-30-10-17
4301333329 WILKIN RIDGE FED 43-31-10-17