

STATE OF UTAH
 DIVISION OF OIL, GAS AND MINING

APPLICATION FOR PERMIT TO DRILL, DEEPEN		5. LEASE DESIGNATION AND SERIAL NO. FEE	
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME N/A	
1a. TYPE OF WORK DRILL <input type="checkbox"/> DEEPEN <input checked="" type="checkbox"/> RE-ENTER <input type="checkbox"/>		7. UNIT AGREEMENT NAME N/A	
1b. TYPE OF WELL OIL <input checked="" type="checkbox"/> GAS <input type="checkbox"/> OTHER <input type="checkbox"/> SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>		8. FARM OR LEASE NAME N/A	
2. NAME OF OPERATOR Newfield Production Company		9. WELL NO. Osmond-Meyer 9-28-4-1E	
3. ADDRESS AND TELEPHONE NUMBER: Route #3 Box 3630, Myton, UT 84052 Phone: (435) 646-3721		10. FIELD AND POOL OR WILDCAT Mount Butte Windg Ridge	
4. LOCATION OF WELL (FOOTAGE) At Surface NE/SE 595415X 1853' FSL 783' FEL 40.103761 At proposed Producing Zone 44396644 -109.880542		11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NE/SE Sec. 28, T4S, R1E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE* Approximately 26.5 miles southeast of Myton, UT		12. County Uintah	13. STATE UT
15. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any) Approx. 533' f/lse line and NA' f/unit line	16. NO. OF ACRES IN LEASE NA	17. NO. OF ACRES ASSIGNED TO THIS WELL 40	
18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR ON THIS LEASE, FT. Approx. 1137'	19. PROPOSED DEPTH 6600'	20. ROTARY OR CABLE TOOLS Rotary	
21. ELEVATIONS (Show whether DF, RT, GR, etc.) 4994' GL		22. APPROX. DATE WORK WILL START* 4th Quarter 2008	

23. **PROPOSED CASING AND CEMENTING PROGRAM**

SIZE OF HOLE	SIZE OF CASING	WEIGHT/FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4	8 5/8	24#	290'	155 sx +/- 10%
7 7/8	5 1/2	15.5#	TD	275 sx lead followed by 450 sx tail
See Detail Below				

DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give date on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

***The actual cement volumes will be calculated off of the open hole logs, plus 15% excess:**

SURFACE PIPE - 155 sx Class G Cement +/I 10%, w/ 2% CaCl2 & 1/4#/sk Cello-flake
 Weight: 15.8 PPG YIELD: 1.17 Cu Ft/sk H2O Req: 5 gal/sk

LONG STRING - Lead: Premium Lite II Cement + 3lbs/sk BA-90 + 3% KCl + .25 lbs/sk Cello Flake + 2 lbs/sk Kol Seal + 10% Bentonite + .5% Sodium Metasilicate
 Weight: 11.0 PPG YIELD: 3.43 Cu Ft/sk H2O Req: 21.04 gal/sk

Tail: 50-50 Poz-Class G Cement + 3% KCl + .25 lbs/sk Cello Flake + 2% Bentonite + .3% Sodium Metasilicate
 Weight: 14.2 PPG YIELD: 1.59 Cu Ft/sk H2O Req: 7.88 gal/sk

24. Name & Signature: *Mandie Crozier* Title: Regulatory Specialist Date: 7/25/2008
Mandie Crozier

(This space for State use only)

API Number Assigned: 43047-40261 APPROVAL: _____



RECEIVED
JUL 28 2008
 DIV. OF OIL, GAS & MINING

T4S, R1E, U.S.B.&M.

NEWFIELD PRODUCTION COMPANY

WEST - 80.00 (G.L.O.)

WELL LOCATION, WELL 9-28-4-1E,
 LOCATED AS SHOWN IN THE NE 1/4 SE
 1/4 OF SECTION 28, T4S, R1E, U.S.B.&M.
 UINAH COUNTY, UTAH.

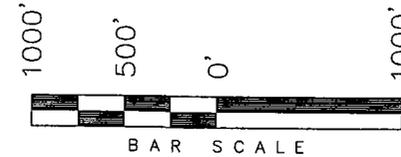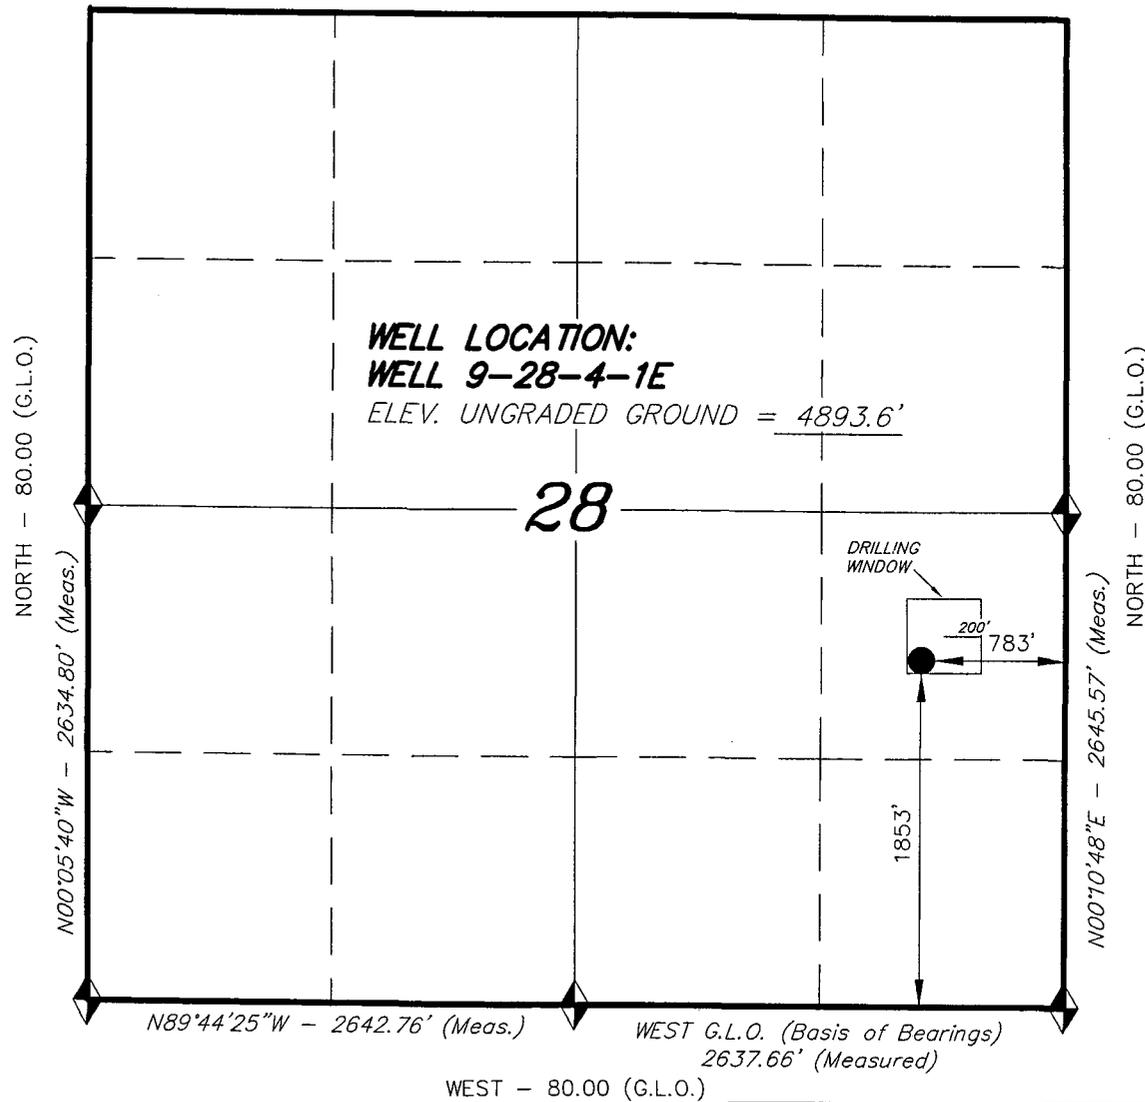

THIS IS TO CERTIFY THAT THE ABOVE PLAN WAS
 PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS
 MADE BY ME OR UNDER MY SUPERVISION AND THAT
 THE SAME ARE TRUE AND CORRECT TO THE BEST OF
 MY KNOWLEDGE AND BELIEF. No. 189377

Stacy W. Stewart
 STACY W. STEWART
 REGISTERED LAND SURVEYOR
 REGISTRATION No. 42273
 STATE OF UTAH

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV;
 U.S.G.S. 7-1/2 min QUAD (PARIETTE DRAW)

WELL 9-28-4-1E
 (Surface Location) . NAD 83
 LATITUDE = 40° 06' 13.89"
 LONGITUDE = 109° 52' 52.12"

TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
 (435) 781-2501

DATE SURVEYED: 5-21-08	SURVEYED BY: C.M.
DATE DRAWN: 6-2-08	DRAWN BY: M.W.
REVISED: 07-24-08 F.T.M.	SCALE: 1" = 1000'

NEWFIELD PRODUCTION COMPANY
OSMOND-MEYER 9-28-4-1E
NE/SE SECTION 28, T4S, R1E
UINTAH COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0 – 1,885'
Green River	1,885'
Wasatch	6,600'

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation (Oil) 1,885' – 6,600'

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO ₃) (mg/l)
Dissolved Bicarbonate (NaHCO ₃) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO ₄) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. **PROPOSED CASING PROGRAM:**

Surface Casing: 8-5/8" J-55 24# w/ST&C collars; set at 290' (New)

Production Casing: 5-1/2" J-55, 15.5# w/LT&C collars; set at TD (New or used, inspected).

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to ±350 feet will be drilled with an air/mist system. From about 350 feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite.

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 290' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the fourth quarter of 2008, and take approximately seven (7) days from spud to rig release.

NEWFIELD PRODUCTION COMPANY
OSMOND-MEYER 9-28-4-1E
NE/SE SECTION 28, T4S, R1E
UINTAH COUNTY, UTAH

THIRTEEN POINT SURFACE PROGRAM

1. EXISTING ROADS

See attached **Topographic Map “A”**

To reach Newfield Production Company well location site Osmond-Meyer 9-28-4-1E located in the NE¼ SE¼ Section 28, T4S, R1E, S.L.B. & M., Uintah County, Utah:

Proceed in a southeasterly direction out of Myton, approximately 16.9 miles to it's junction with an existing road to the northeast; proceed northeasterly approximately 6.2 miles to it's junction with an existing road to the northwest; proceed in a northwesterly direction approximately 2.2 miles to it's junction with an existing road to the northwest; proceed northwesterly approximately 1.0 miles to it's junction with the beginning of the proposed access road to the northwest; proceed along the proposed access road approximately 1,220' to the proposed well location.

The highways mentioned in the foregoing paragraph are bituminous surfaced roads to the point where Highway 216 exists to the South, thereafter the roads are constructed with existing materials and gravel. The highways are maintained by Utah State road crews. All other roads are maintained by County crews.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal.

2. PLANNED ACCESS ROAD

Approximately 1,220' of access road is proposed. See attached **Topographic Map “B”**.

The proposed access road will be an 18' crown road (9' either side of the centerline) with drainage ditches along either side of the proposed road whether it is deemed necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area. The maximum grade will be less than 8%.

There will be no culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. **LOCATION OF EXISTING WELLS**

Refer to **EXHIBIT B**.

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck for drilling purposes from the following water sources:

Johnson Water District
Water Right: 43-10136

Neil Moon Pond
Water Right: 43-11787

Maurice Harvey Pond
Water Right: 47-1358

Newfield Collector Well
Water Right: 41-3530 (A30414DV, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous

will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

Immediately upon first production, all produced water will be confined to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E) or at State of Utah approved surface disposal facilities.

8. **ANCILLARY FACILITIES:**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT:**

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

10. **PLANS FOR RESTORATION OF SURFACE:**

- a) **Producing Location**

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

b) **Dry Hole Abandoned Location**

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP:** Kendall Investments LLC.

See attached Easement ROW and Surface Use Agreement.

12. **OTHER ADDITIONAL INFORMATION:**

- a) Newfield Production Company is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, Newfield is to immediately stop work that might further disturb such materials and contact the Authorized Officer.
- b) Newfield Production will control noxious weeds along rights-of-way for roads, pipelines, well sites or other applicable facilities. On State administered land it is required that a Pesticide Use Proposal shall be submitted and given approval prior to the application of herbicides or other possible hazardous chemicals.
- c) Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on State Lands after the conclusion of drilling operations or at any other time without State authorization. However, if State authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

The Archaeological and Paleontological Report Waiver is attached. See Exhibit "D".

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the Osmond-Meyer 9-28-4-1E, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the Osmond-Meyer 9-28-4-1E Newfield will use, produce, store, transport or dispose less than the

threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

The State office shall be notified upon site completion prior to moving on the drilling rig.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

Representative


Name: Dave Allred
Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification

Please be advised that Newfield Production Company is considered to be the operator of well #9-28-4-1E, NE/SE Section 28, T4S, R1E, Uintah County, Utah and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by Hartford Accident #4471291.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

7/25/08
Date


Mandie Crozier
Regulatory Specialist
Newfield Production Company

MEMORANDUM
of
EASEMENT, RIGHT-OF-WAY
and
SURFACE USE AGREEMENT

This Easement, Right-of-Way and Surface Use Agreement ("Agreement") is entered into this 18th day of January 2008 by and between **Kendall Investments LLC, Mike Kendall, 1638 East Gorden Ave, Layton, Utah 84040** ("Surface Owner," whether one or more), and NEWFIELD PRODUCTION COMPANY, a Texas corporation ("NEWFIELD"), with offices at 1401 Seventeenth Street, Suite 1000, Denver, Colorado 80202, covering certain lands, (the "Lands") situated in Uintah County, Utah described as follows:

Township 4 South, Range 1 East
Section 28: S/2
Section 33: Lots 1,2,3,4
Uintah County, Utah

being, 449 acres more or less,

and associated roads and pipeline routes beginning at each wellsite and traversing the lands as shall be agreed upon prior to the construction of same.

For and in consideration of the sum of ten dollars (\$10.00), and other valuable consideration, the receipt and sufficiency of which are hereby acknowledged, the undersigned hereby agree to the terms and provisions set forth as follows:

1. Compensation for Well: Release of All Claims

NEWFIELD shall pay to Surface Owner the sum as set forth in and according to the terms of that certain Letter Agreement for Easement, Right-of Way and Surface Use by and between Surface Owner and NEWFIELD, dated January 18, 2008, as full payment and satisfaction for any and all detriment, depreciation, injury or damage of any nature to the Lands or growing crops thereon that may occur as a result of NEWFIELD's drilling or completion operations or its continuing activities for the production or transportation of oil, gas, or other hydrocarbons or products associated with the foregoing including, but not limited to, surface use, access, pipelines, gathering lines, pipeline interconnections, and any and all other reasonable or customary uses of land related to said operations or activities.

2. Grant of Right of Way and Easement

Surface Owner hereby grants, bargains, leases, assigns, and conveys to NEWFIELD an easement and right-of-way for the purpose of construction, using and maintaining access roads, locations for surface equipment and subsurface gathering lines for each well drilled upon the Lands, pipelines, and pipeline interconnections for two years from date of this agreement and so long thereafter as NEWFIELD's oil and gas leases remain in effect.

This Agreement shall be binding upon the respective heirs, executors, administrators, successors, and assigns of the undersigned.

These Parties hereto have executed this document effective as of the day first above written.

KENDALL INVESTMENTS LLC

NEWFIELD PRODUCTION COMPANY

By: 

Mike Kendall, President

By: _____

Gary D. Packer, President

RECEIVED

JUL 28 2008

MEMORANDUM
of
EASEMENT and RIGHT-OF-WAY

This Easement and Right-of-Way Agreement ("Agreement") is entered into this 6th day of December 2007 by and between, **Rex and LaRue Lamb Trust, Karl Lamb, trustee whose address is PO Box 374, Myton Utah 84052**, ("Surface Owner," whether one or more), and NEWFIELD PRODUCTION COMPANY, a Texas corporation ("NEWFIELD"), with offices at 1401 Seventeenth Street, Suite 1000, Denver, Colorado 80202, covering certain lands, (the "Lands") situated in Uintah County, Utah described as follows:

Township 4 South, Range 1 East
NWSE, NESE, Lot 1, Lot 2, Lot 3, Lot 4 Sec 29
NWNE, NENW, NWNW, SENW, SWNE, SENE, Lot 1, Lot 2, Lot 3, Lot 4 Sec 34

being, 569 acres more or less,

For and in consideration of the sum of ten dollars (\$10.00), and other valuable consideration, the receipt and sufficiency of which are hereby acknowledged, the undersigned hereby agree to the terms and provisions set forth as follows:

1. Compensation for Well; Release of All Claims

NEWFIELD shall pay to Surface Owner the sum as set forth in and according to the terms of that certain Letter Agreement for Easement and Right-of Way by and between Surface Owner and NEWFIELD, dated December 6, 2007 as full payment and satisfaction for any and all detriment, depreciation, injury or damage of any nature to the Lands or growing crops thereon that may occur as a result of NEWFIELD's continuing activities associated with drilling, producing, and transporting of oil and gas, including, but not limited to, surface use, access, pipelines, gathering lines, pipeline interconnections, and any and all other reasonable or customary uses of land related to said operations or activities.

2. Grant of Right of Way and Easement

Surface Owner hereby grants, bargains, leases, assigns, and conveys to NEWFIELD an easement and right-of-way for the purpose of construction, using and maintaining access roads, locations for surface equipment and subsurface gathering lines for each well drilled upon the Lands, pipelines, and pipeline interconnections for two years from date of this agreement and so long thereafter as NEWFIELD requires for the use of the subject lands to service its oil and gas operations on and in the vicinity of said lands.

This Agreement shall be binding upon the respective heirs, executors, administrators, successors, and assigns of the undersigned.

These Parties hereto have executed this document effective as of the day first above written.

NEWFIELD PRODUCTION COMPANY

By: _____
Gary D. Packer, President

SURFACE OWNER



By: Karl Lamb
Karl Lamb, Rex and LaRue Lamb Trustee

RECEIVED
JUL 28 2008
DIV. OF OIL, GAS & MINING

NEWFIELD PRODUCTION COMPANY

WELL 9-28-4-1E

Section 28, T4S, R1E, U.S.B.&M.

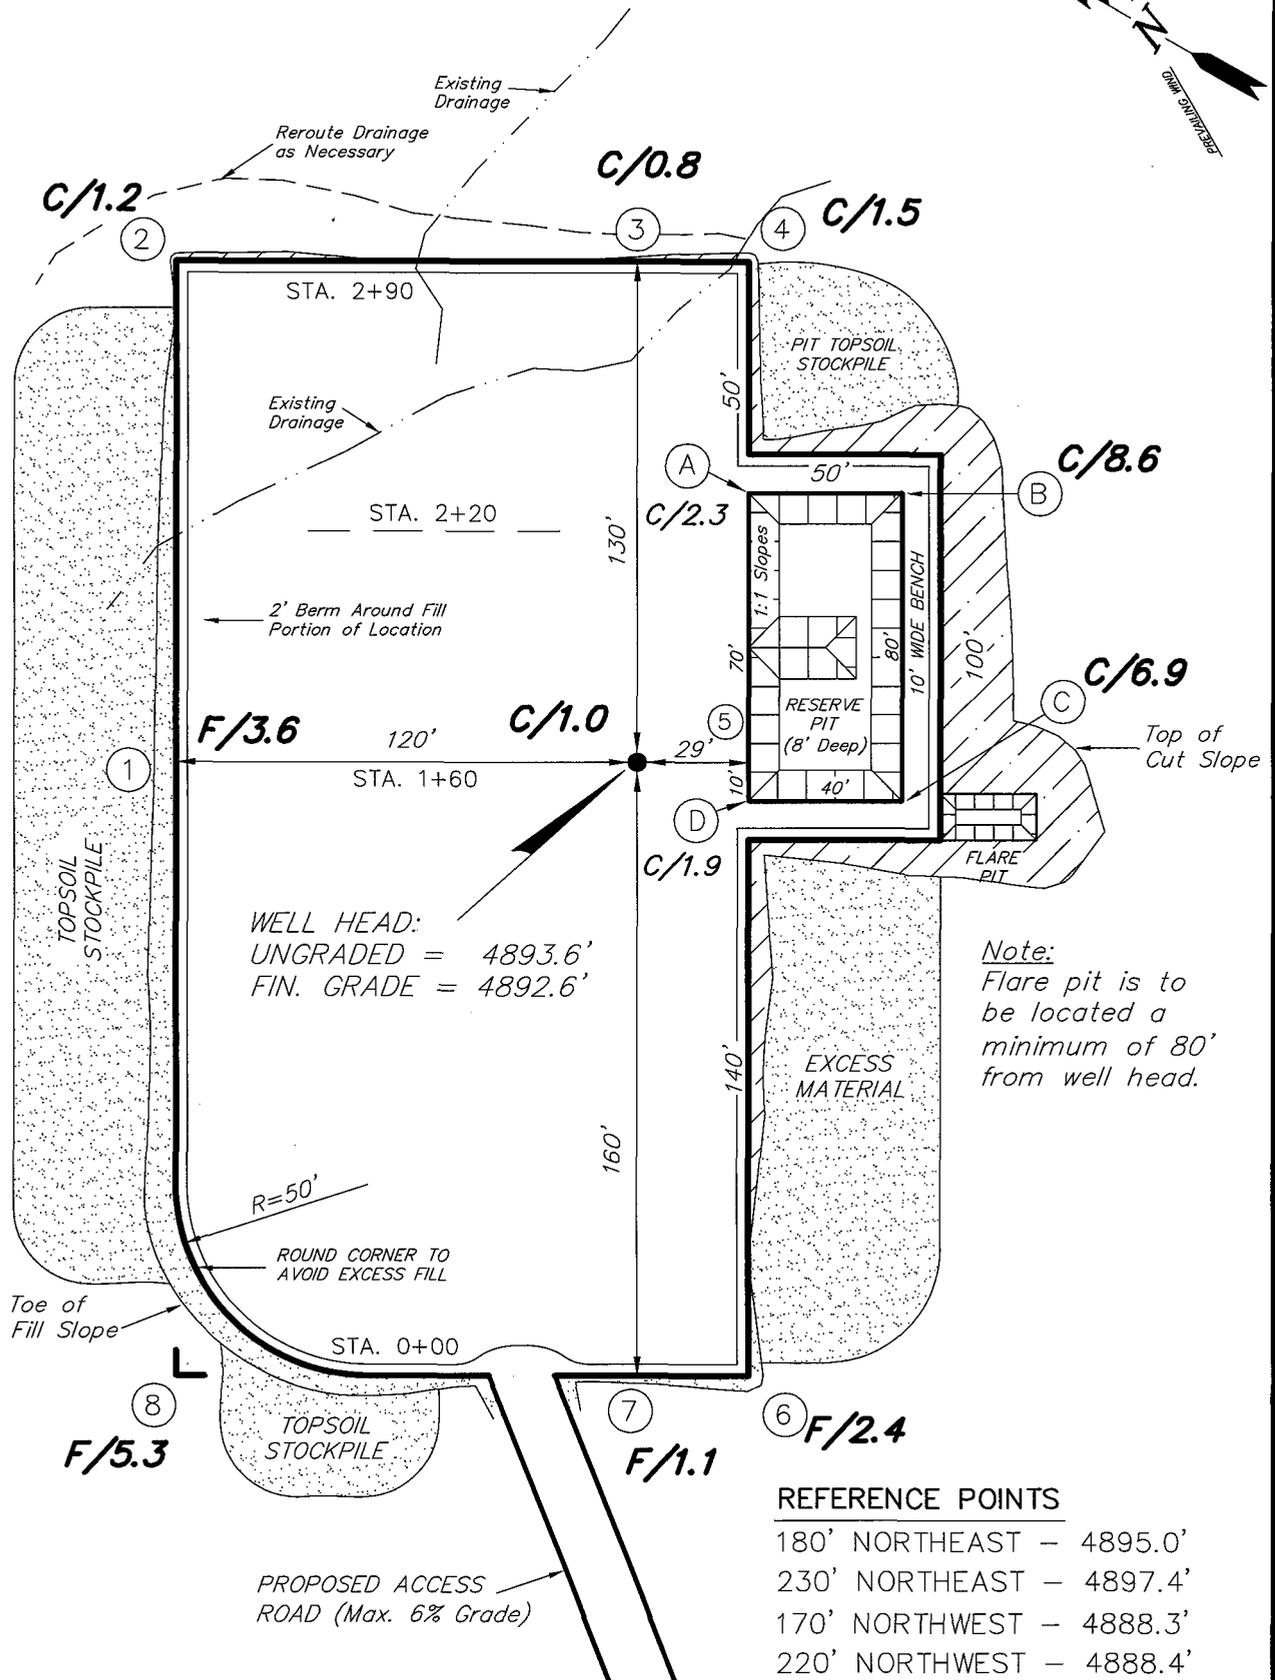

REFERENCE POINTS





- 180' NORTHEAST - 4895.0'
- 230' NORTHEAST - 4897.4'
- 170' NORTHWEST - 4888.3'
- 220' NORTHWEST - 4888.4'

SURVEYED BY: T.H.	DATE SURVEYED: 5-21-08
DRAWN BY: M.W.	DATE DRAWN: 6-2-08
SCALE: 1" = 50'	REVISED:

Tri State (435) 781-2501
Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD PRODUCTION COMPANY

CROSS SECTIONS WELL 9-28-4-1E

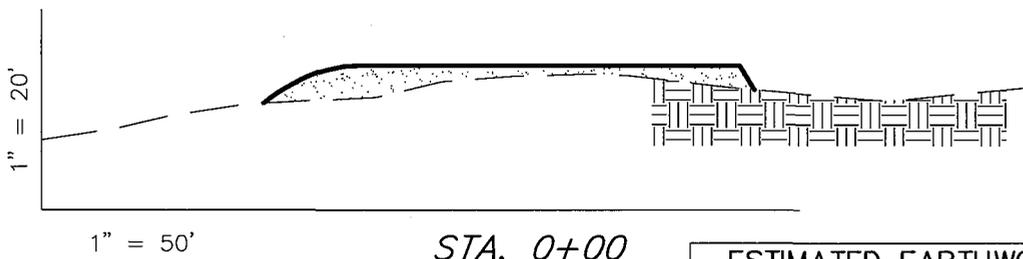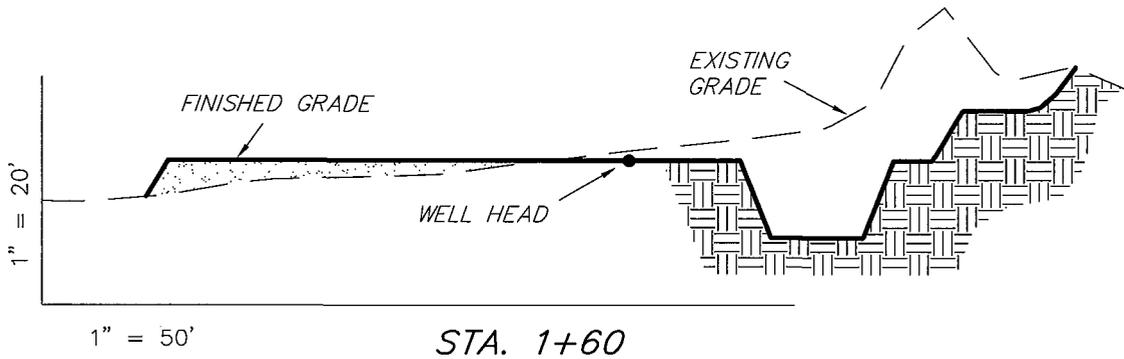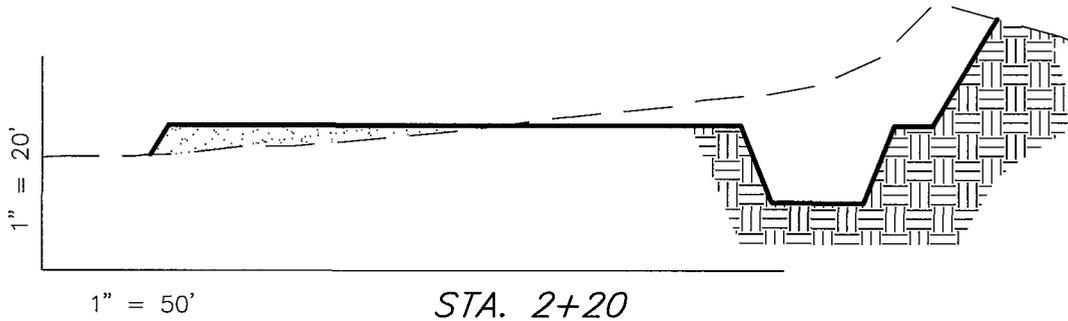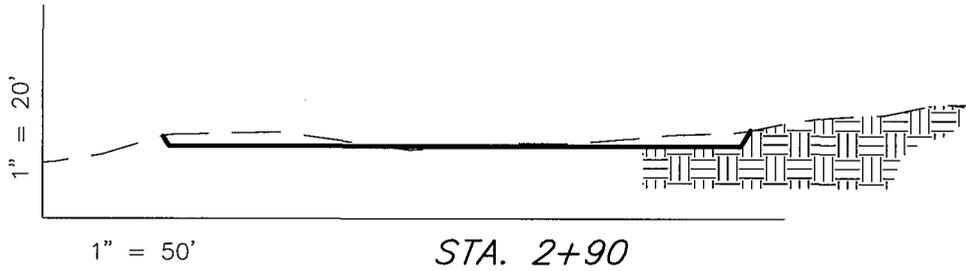

ESTIMATED EARTHWORK QUANTITIES (No Shrink or swell adjustments have been used) (Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	2,330	2,330	Topsoil is not included in Pad Cut	0
PIT	640	0		640
TOTALS	2,970	2,330	1,000	640

NOTE:
UNLESS OTHERWISE
NOTED ALL CUT/FILL
SLOPES ARE AT 1.5:1



SURVEYED BY: C.M.	DATE SURVEYED: 5-21-08
DRAWN BY: M.W.	DATE DRAWN: 6-2-08
SCALE: 1" = 50'	REVISED:

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078
(435) 781-2501

NEWFIELD PRODUCTION COMPANY

TYPICAL RIG LAYOUT


WELL 9-28-4-1E

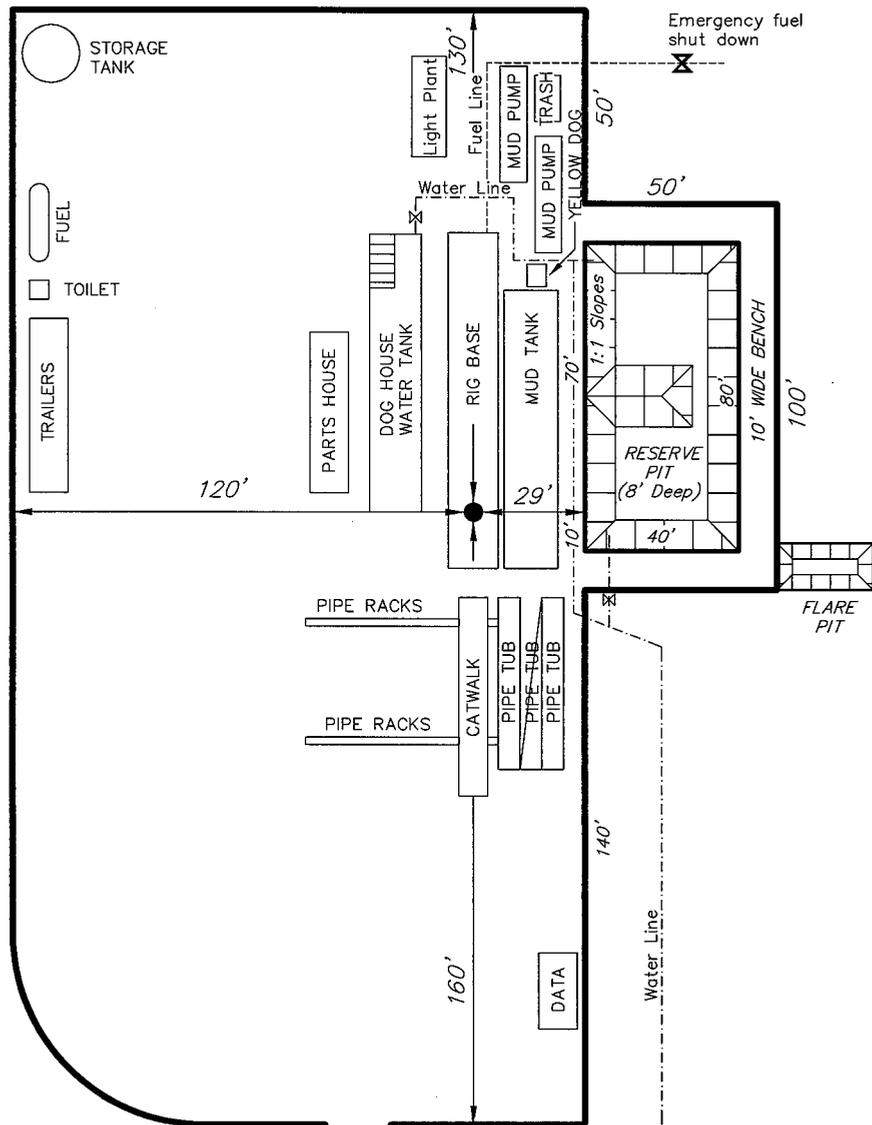

PROPOSED ACCESS ROAD (Max. 6% Grade)

SURVEYED BY: C.M.	DATE SURVEYED: 5-21-08
DRAWN BY: M.W.	DATE DRAWN: 6-2-08
SCALE: 1" = 50'	REVISED:

Tri State (435) 781-2501
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

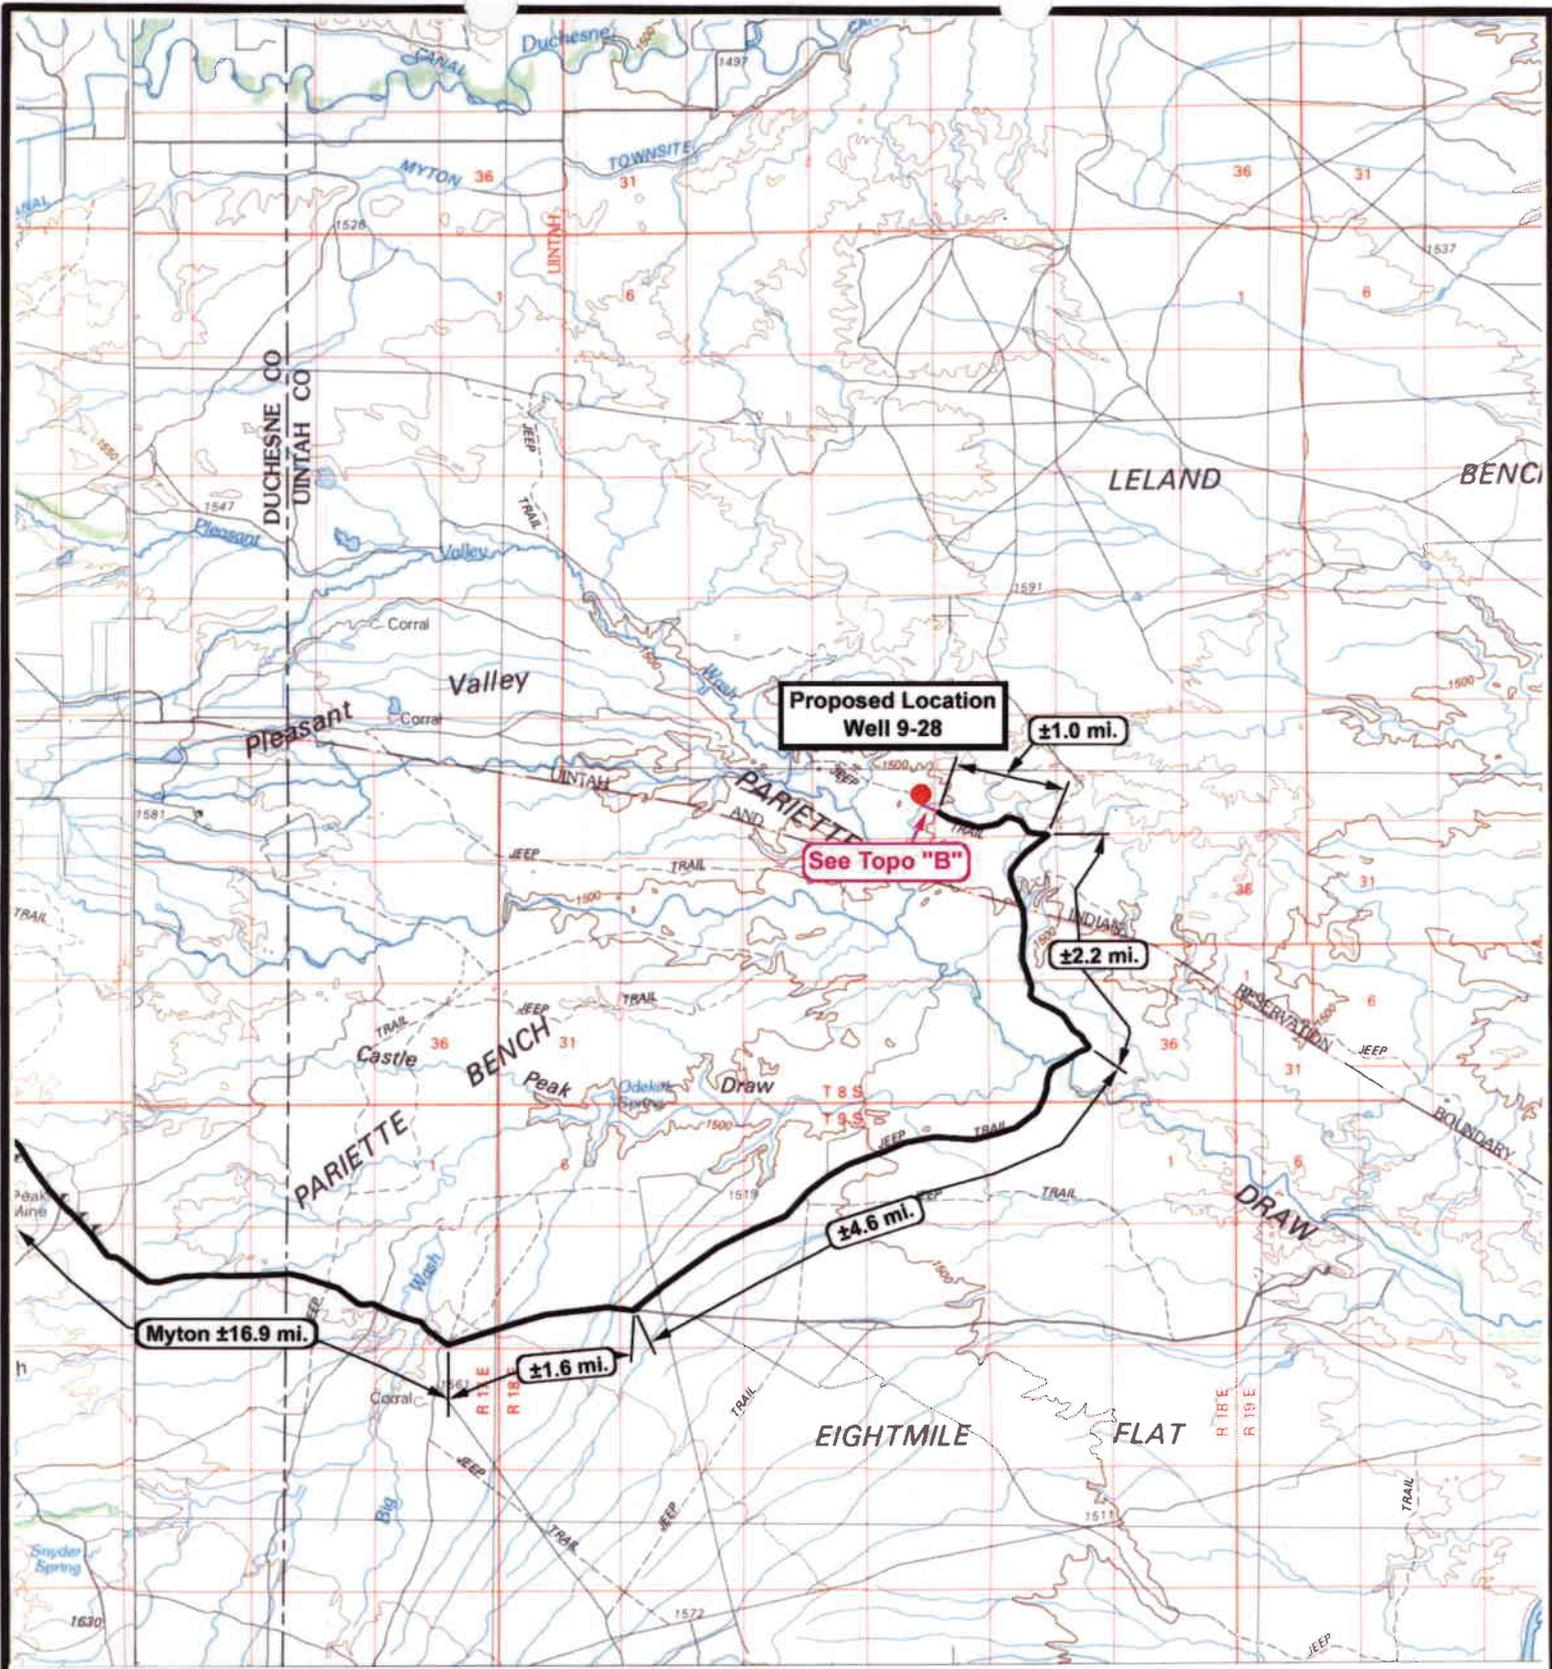

NEWFIELD
Exploration Company

Well 9-28-4-1E
SEC. 28, T4S, R1E, U.S.B.&M.



Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078


SCALE: 1 = 100,000
DRAWN BY: JAS
DATE: 06-11-2007

Legend

- Existing Road
- Proposed Access

TOPOGRAPHIC MAP

"A"

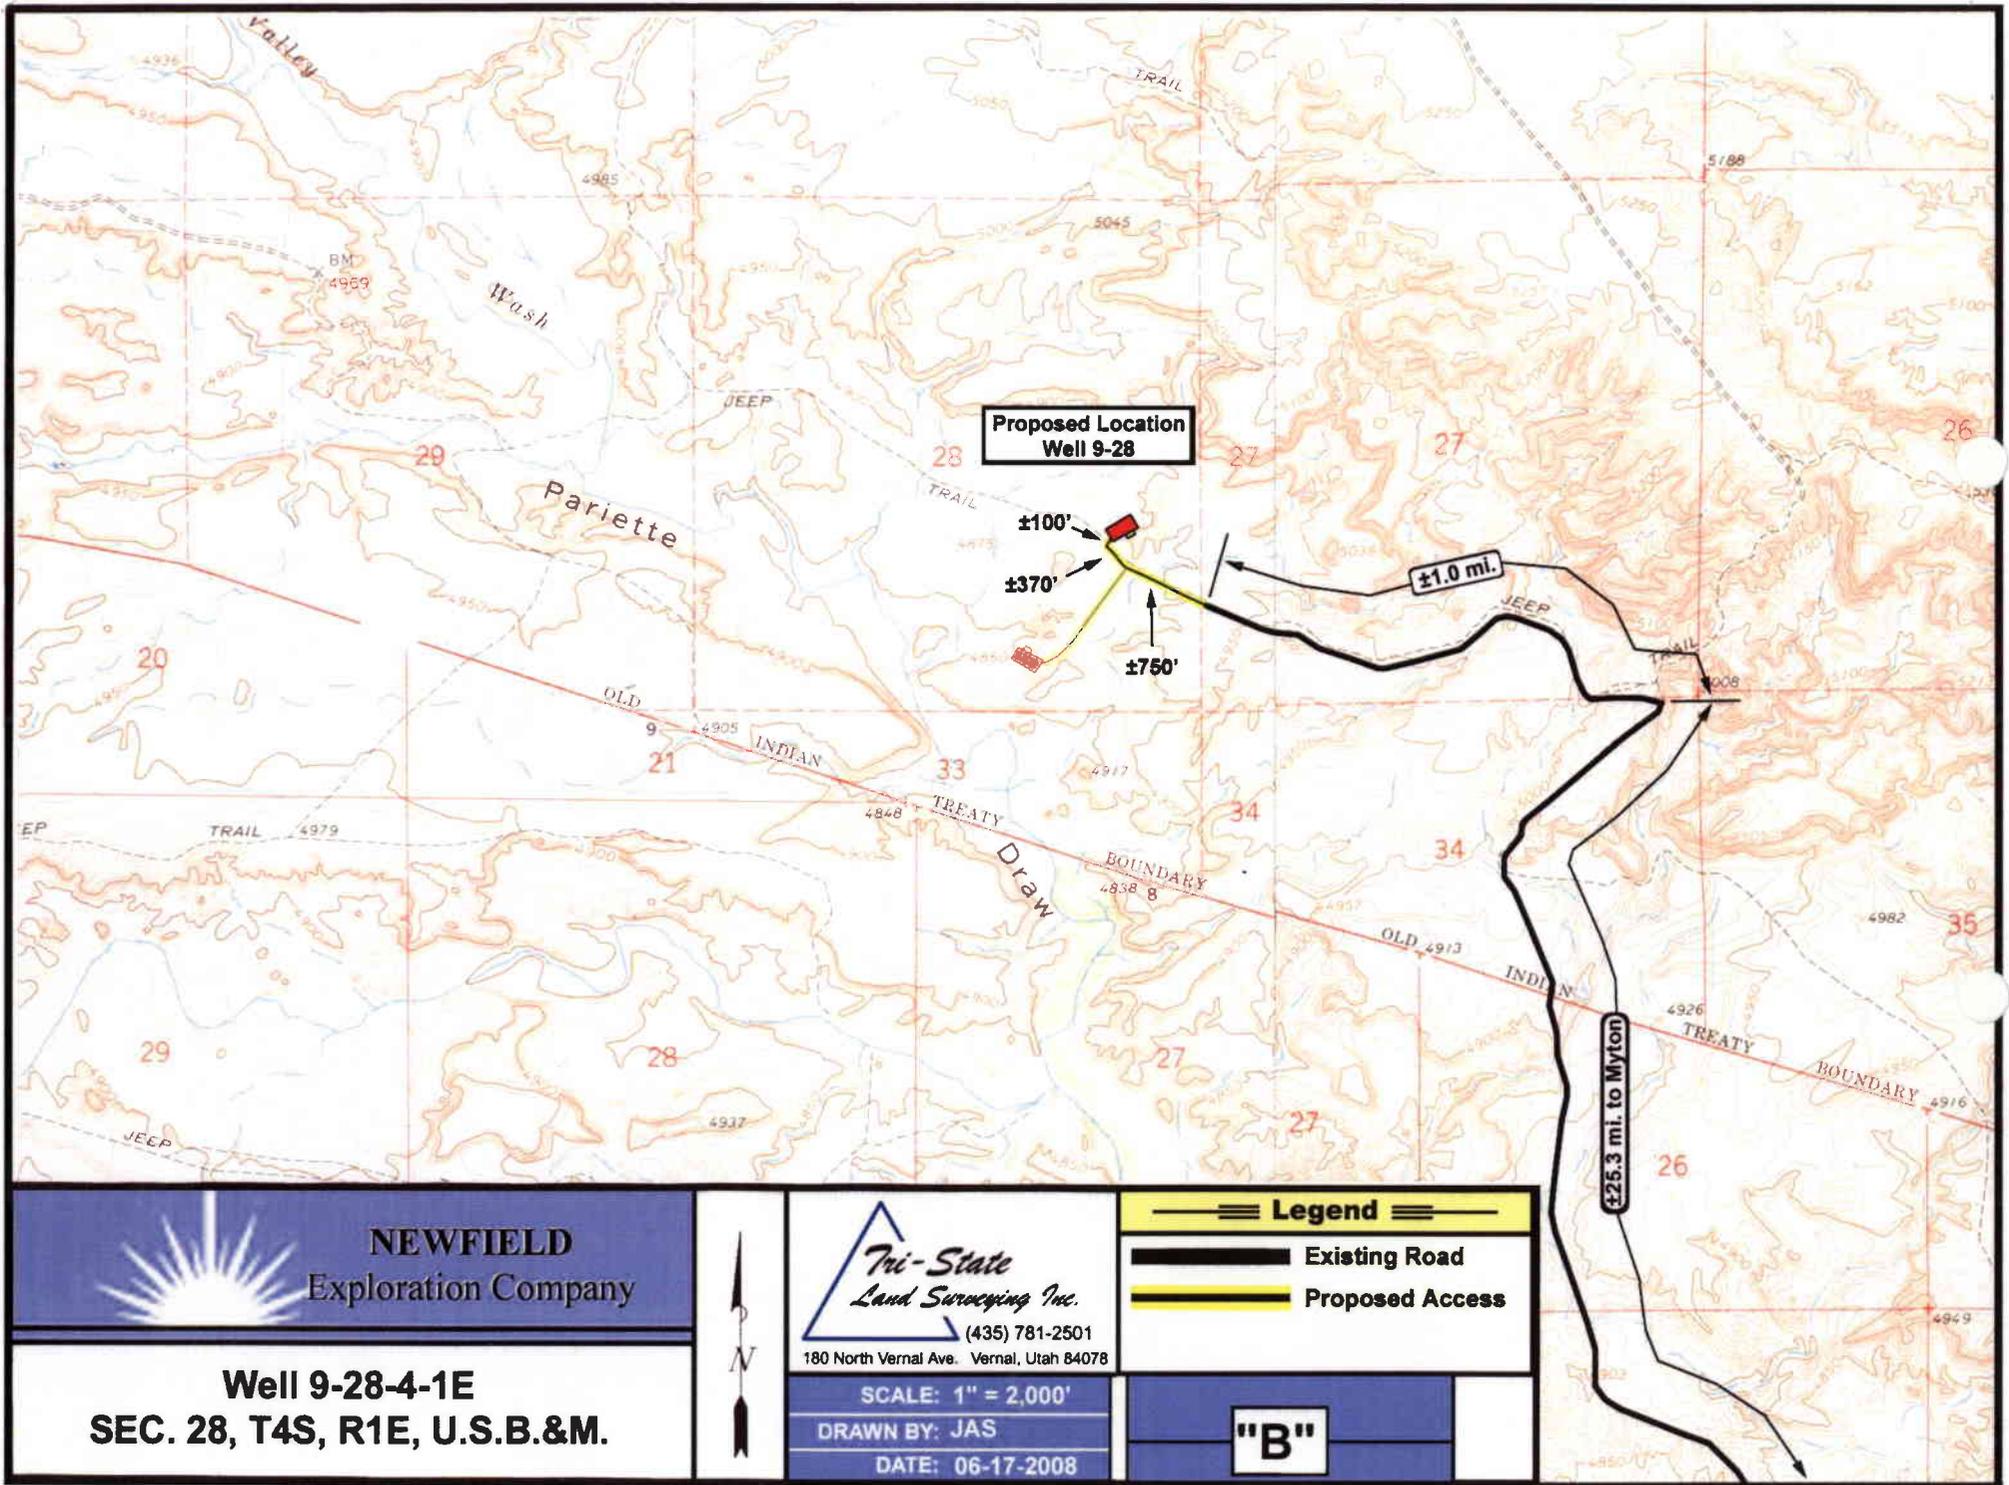

NEWFIELD
Exploration Company

Well 9-28-4-1E
SEC. 28, T4S, R1E, U.S.B.&M.




Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'
DRAWN BY: JAS
DATE: 06-17-2008

Legend

— Existing Road
— Proposed Access

"B"

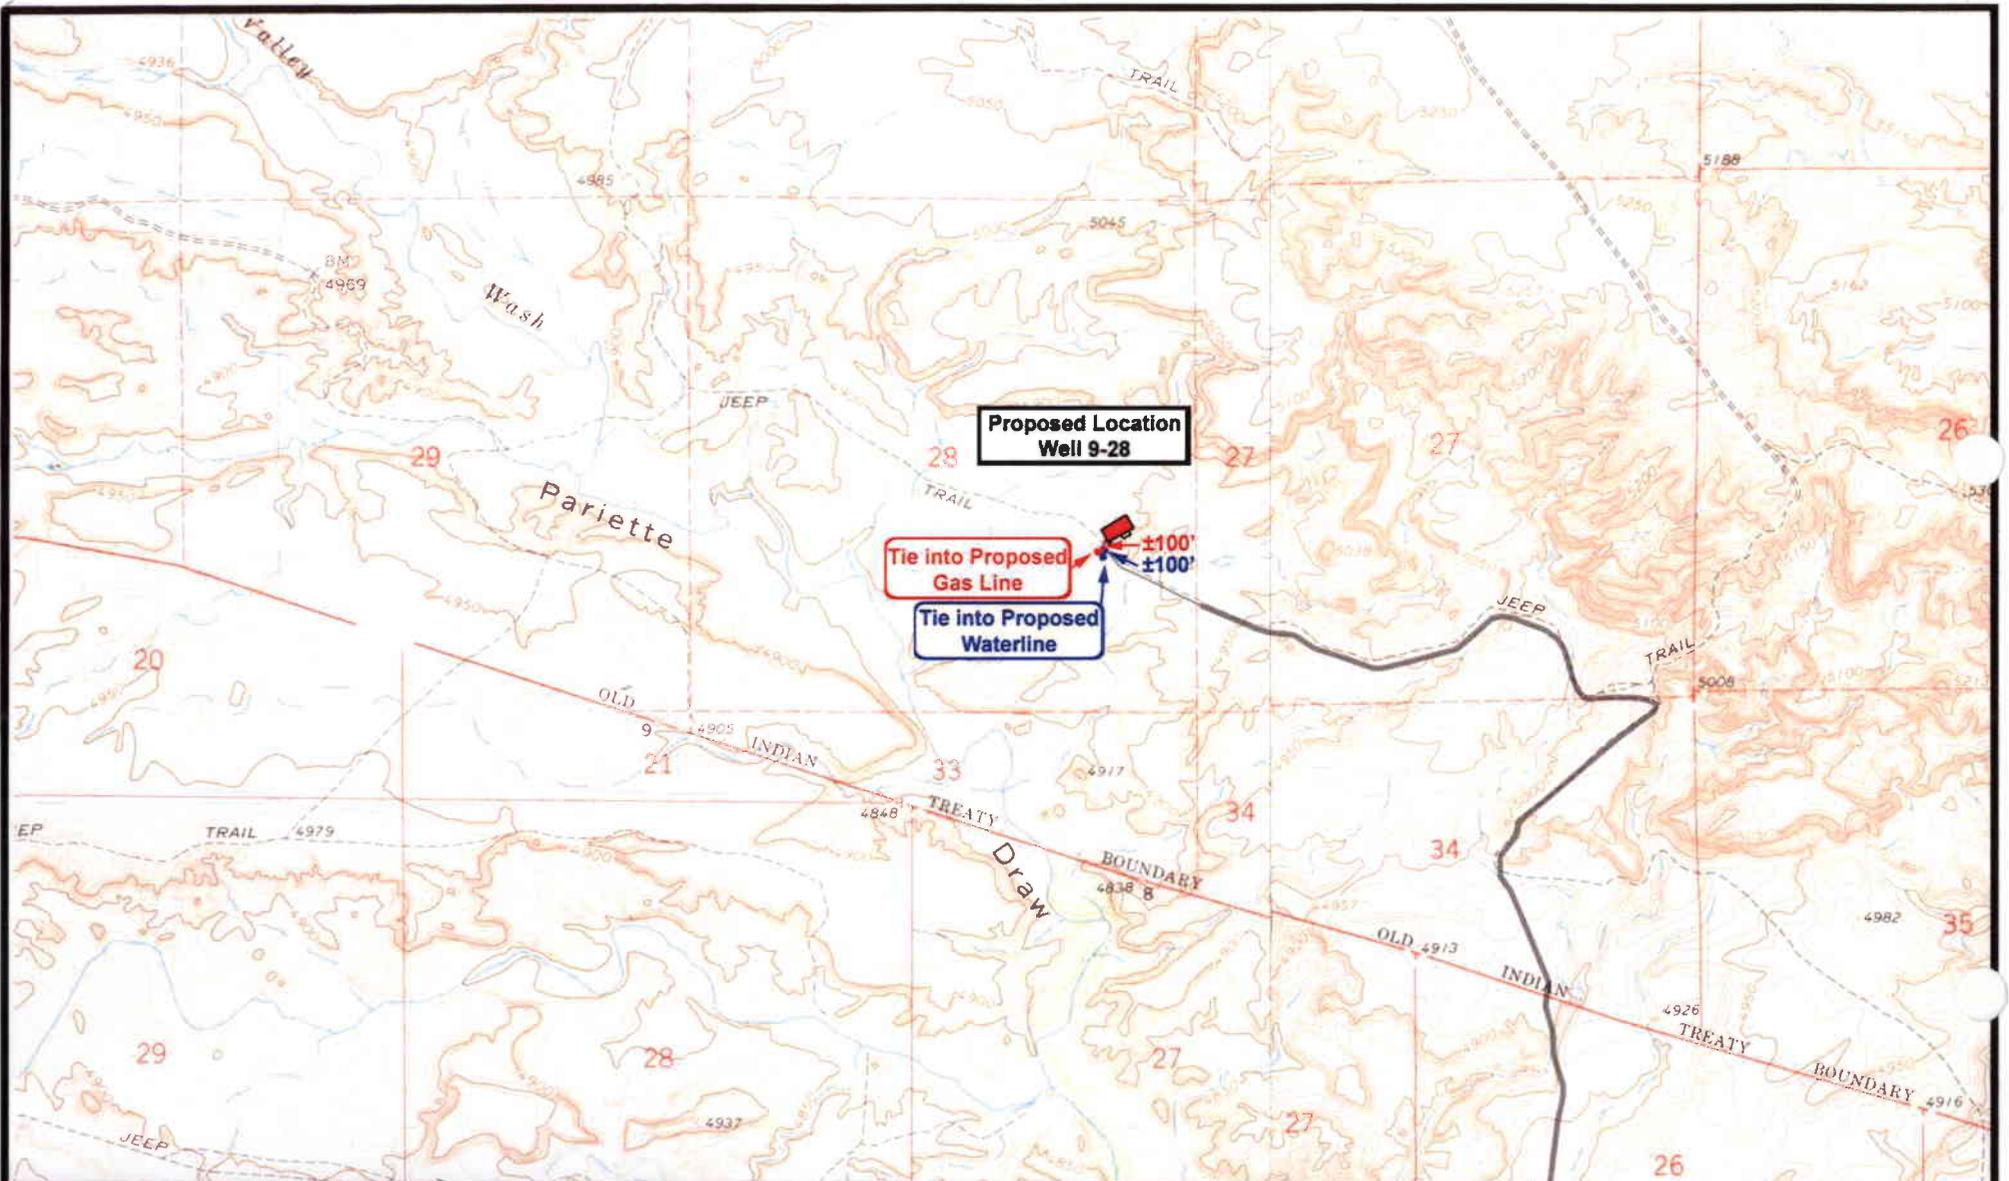

 **NEWFIELD**
Exploration Company


Well 9-28-4-1E
SEC. 28, T4S, R1E, U.S.B.&M.




 **Tri-State**
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078


SCALE: 1" = 2,000'
DRAWN BY: JAS
DATE: 06-17-2008

Legend

-  Roads
-  Proposed Gas Line
-  Proposed Water Line

"C"

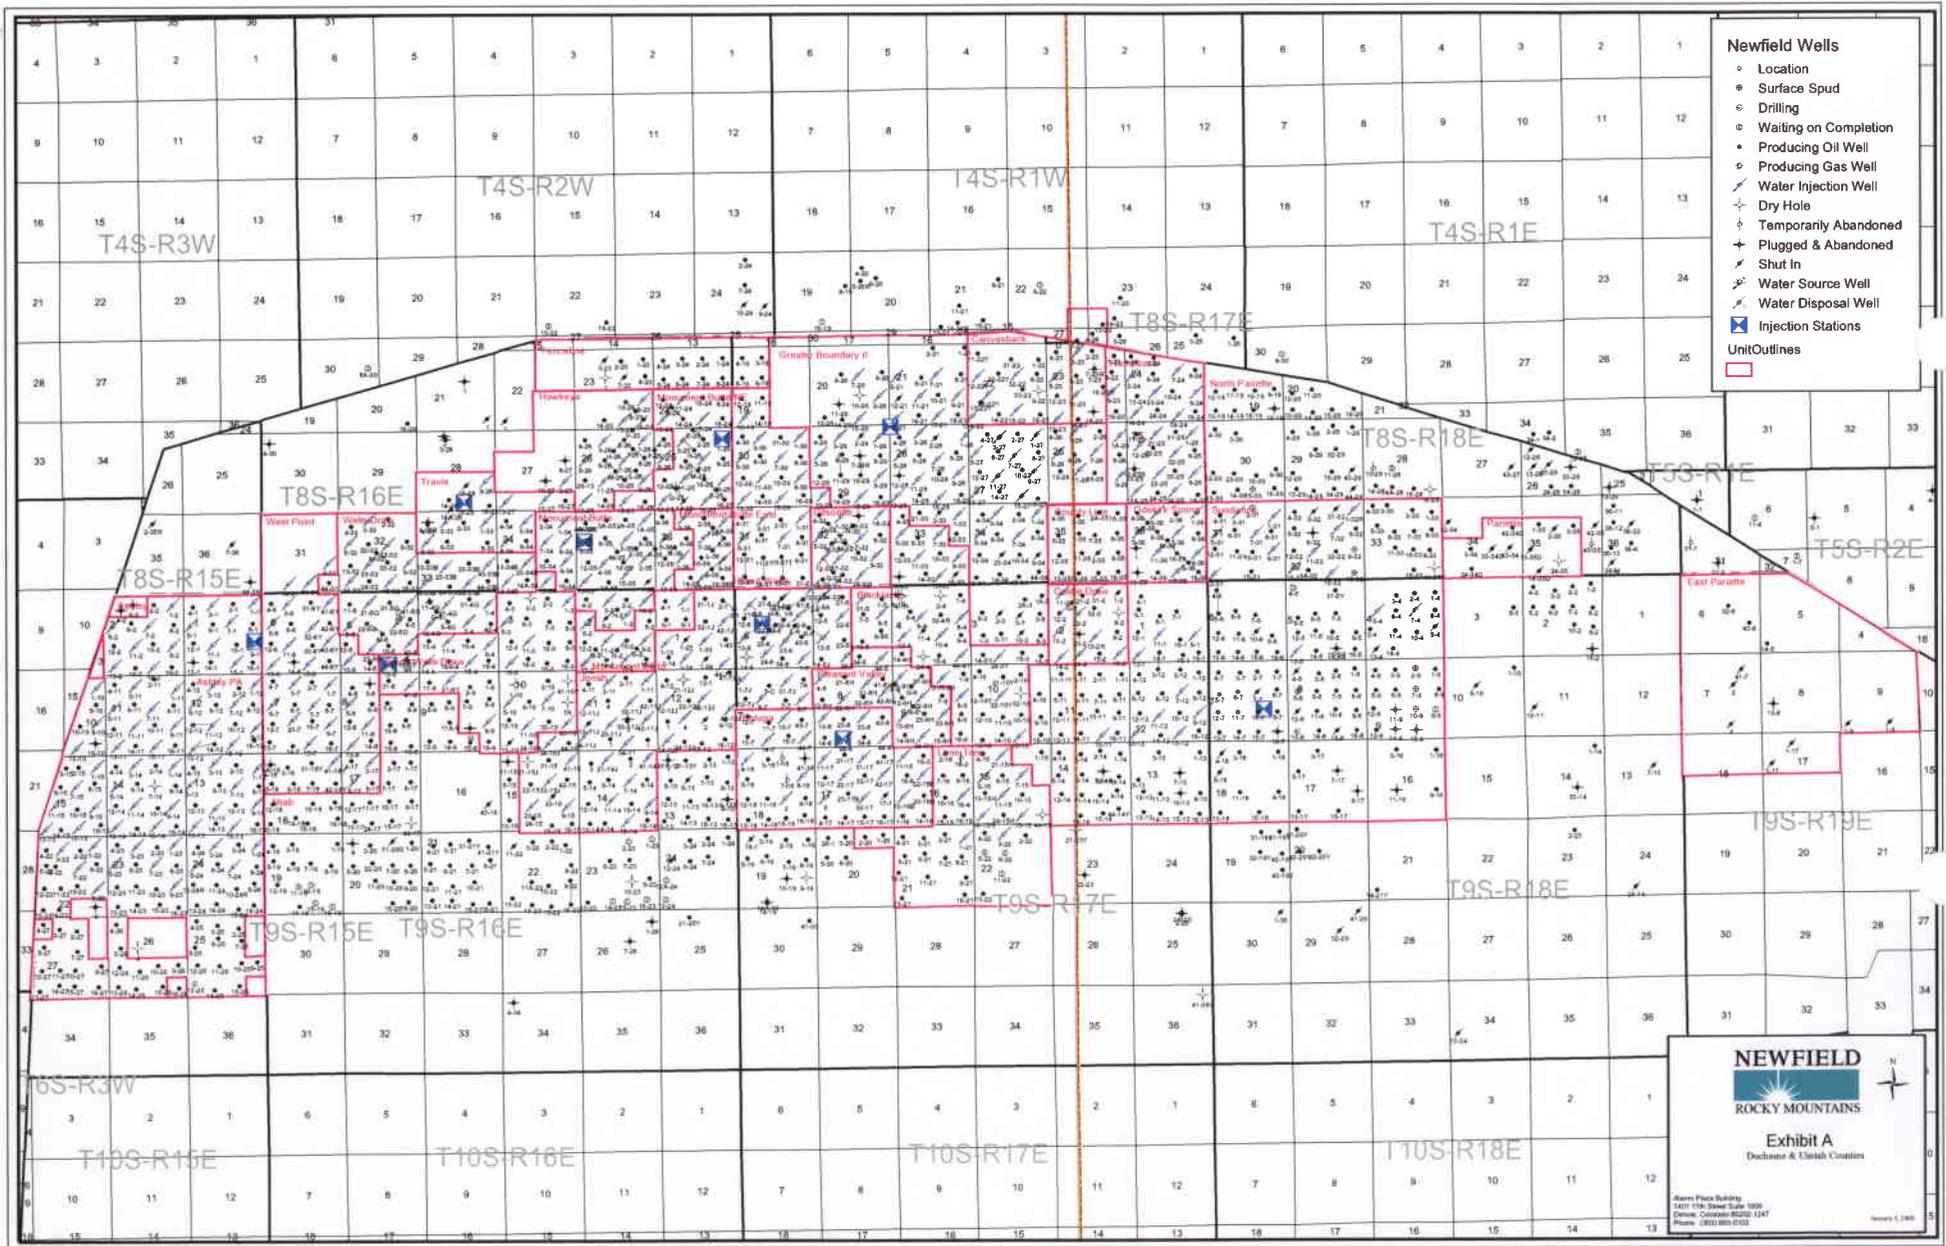

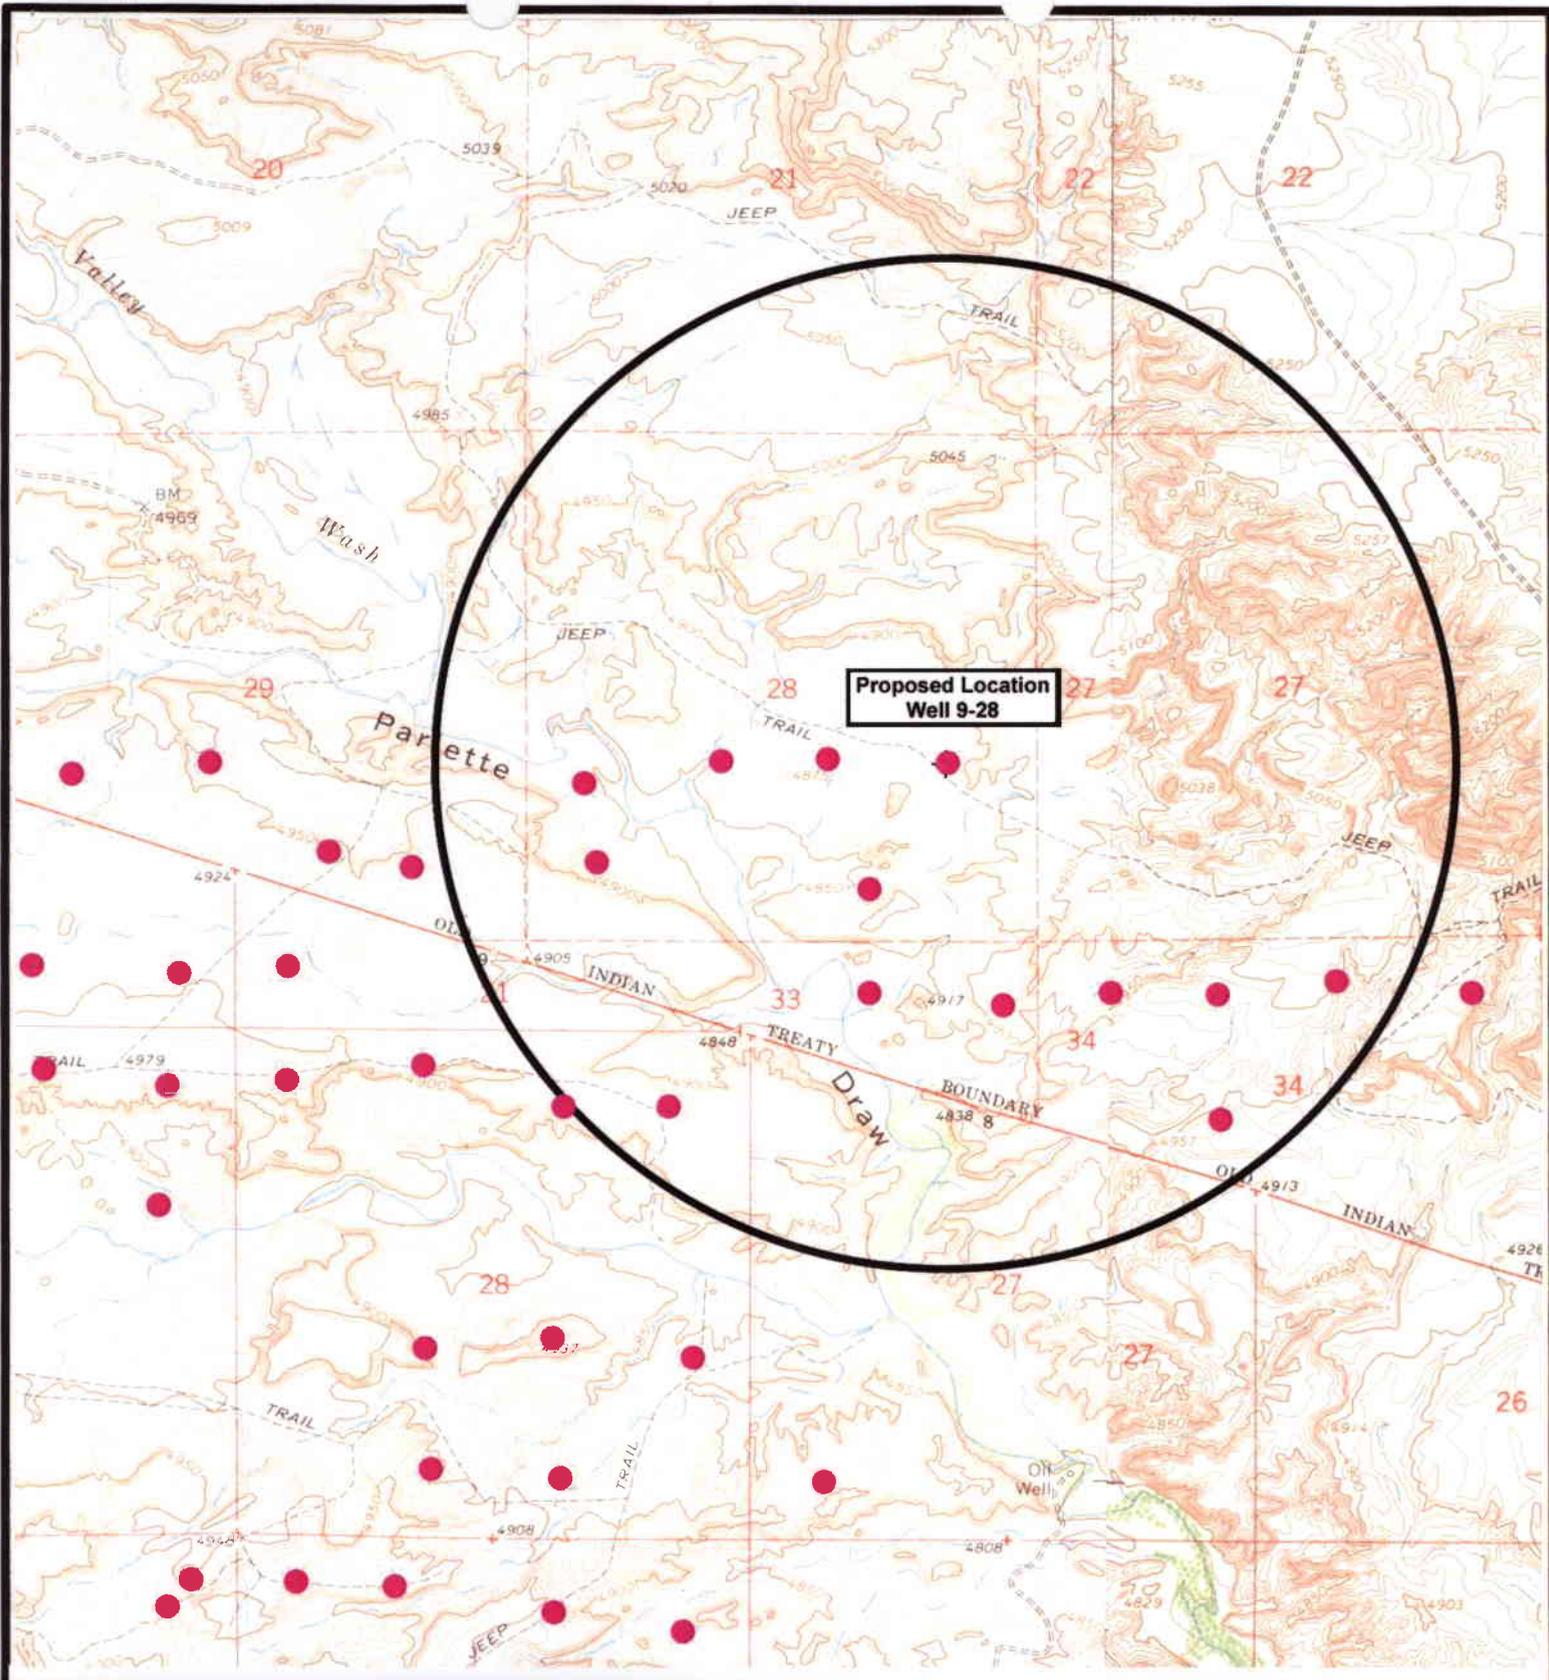

**Proposed Location
Well 9-28**



NEWFIELD
Exploration Company

Well 9-28-4-1E
SEC. 28, T4S, R1E, U.S.B.&M.



Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'
DRAWN BY: JAS
DATE: 06-17-2008

Legend

- Location
- One-Mile Radius

Exhibit "B"

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 07/28/2008

API NO. ASSIGNED: 43-047-40261

WELL NAME: OSMOND-MEYER 9-28-4-1E
 OPERATOR: NEWFIELD PRODUCTION (N2695)
 CONTACT: MANDIE CROZIER

PHONE NUMBER: 435-646-3721

PROPOSED LOCATION:

NESE 28 040S 010E
 SURFACE: 1853 FSL 0783 FEL
 BOTTOM: 1853 FSL 0783 FEL
 COUNTY: UINTAH
 LATITUDE: 40.10376 LONGITUDE: -109.8805
 UTM SURF EASTINGS: 595415 NORTHINGS: 4439664
 FIELD NAME: WINDY RIDGE (718)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering	DKD	11/5/08
Geology		
Surface		

LEASE TYPE: 4 - Fee
 LEASE NUMBER: FEE
 SURFACE OWNER: 4 - Fee

PROPOSED FORMATION: GRRV
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[] Ind[] Sta[] Fee[]
(No. B001834)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. 43-10136)
- RDCC Review (Y/N)
(Date: _____)
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)

LOCATION AND SITING:


- R649-2-3.
- Unit: _____
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
- Board Cause No: _____
- Eff Date: _____
- Siting: _____
- R649-3-11. Directional Drill

COMMENTS:

1- Lead Permit (09-23-08)

STIPULATIONS:

- 1- Spacing Strip
- 2- STATEMENT OF BASIS
- 3- Surface Casing Cont Strip

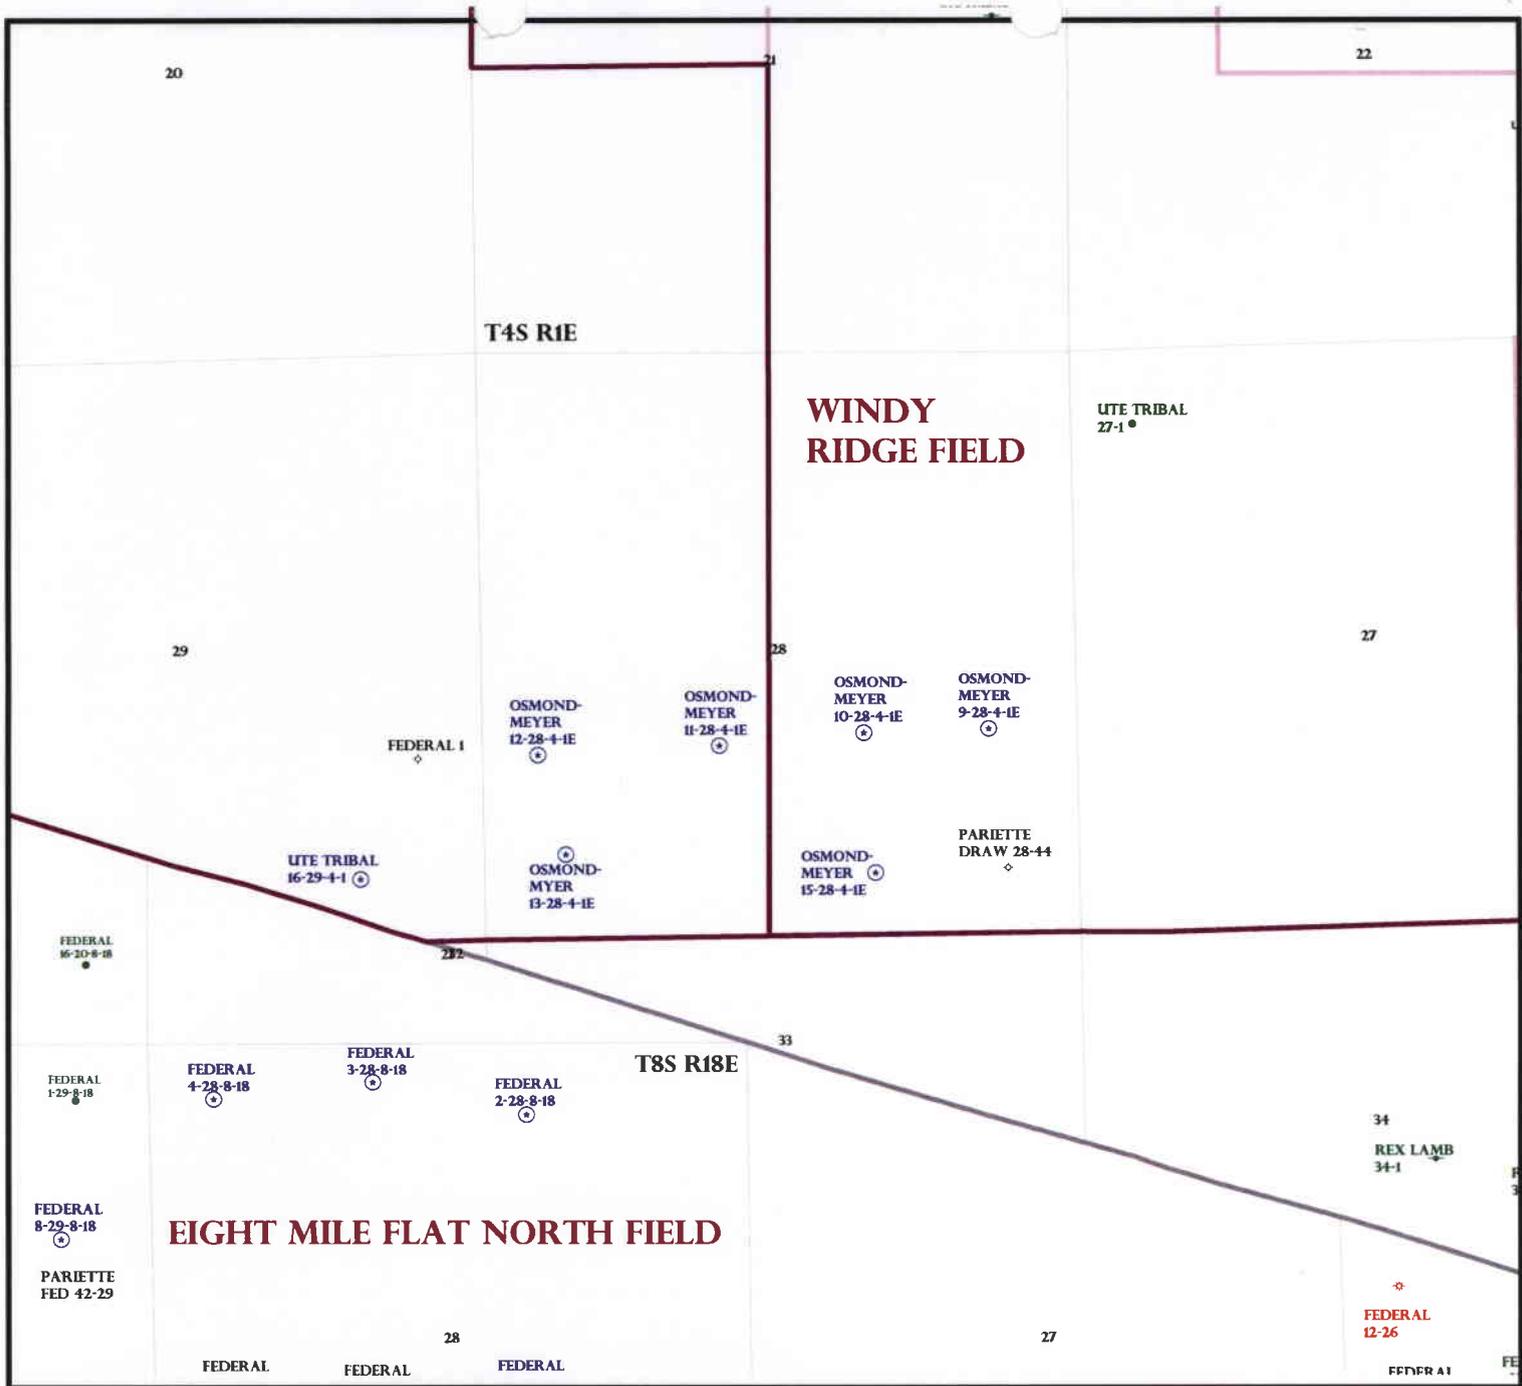

OPERATOR: NEWFIELD PROD CO (N2695)

SEC: 28 T.4S R. 1E

FIELD: WINDY RIDGE (718)

COUNTY: UINTAH

SPACING: R649-3-2 / GENERAL SITING

Field Status

	ABANDONED
	ACTIVE
	COMBINED
	INACTIVE
	PROPOSED
	STORAGE
	TERMINATED

Unit Status

	EXPLORATORY
	GAS STORAGE
	NF PP OIL
	NF SECONDARY
	PENDING
	PI OIL
	PP GAS
	PP GEOTHERML
	PP OIL
	SECONDARY
	TERMINATED

Wells Status

	GAS INJECTION
	GAS STORAGE
	LOCATION ABANDONED
	NEW LOCATION
	PLUGGED & ABANDONED
	PRODUCING GAS
	PRODUCING OIL
	SHUT-IN GAS
	SHUT-IN OIL
	TEMP. ABANDONED
	TEST WELL
	WATER INJECTION
	WATER SUPPLY
	WATER DISPOSAL
	DRILLING



PREPARED BY: DIANA MASON
DATE: 29-JULY-2008

Application for Permit to Drill

Statement of Basis

10/1/2008

Utah Division of Oil, Gas and Mining

Page 1

APD No	API WellNo	Status	Well Type	Surf Ownr	CBM
901	43-047-40261-00-00		OW	P	No
Operator	NEWFIELD PRODUCTION COMPANY	Surface Owner-APD			
Well Name	OSMOND-MEYER 9-28-4-1E	Unit			
Field	WINDY RIDGE	Type of Work			
Location	NESE 28 4S 1E S 1853 FSL 783 FEL	GPS Coord (UTM) 595415E 4439664N			

Geologic Statement of Basis

Newfield proposes to set 290' of surface casing at this location. The depth to the base of the moderately saline water at this location is estimated to be at a depth of 500'. A search of Division of Water Rights records shows no water wells within a 10,000 foot radius of the center of Section 28. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be a significant source of useable ground water. It is recommended that surface casing be extended to cover the base of the moderately saline ground water.

Brad Hill
APD Evaluator

10/1/2008
Date / Time

Surface Statement of Basis

The proposed Osmond-Meyer 9-28-4-1E oil well location is approximately 26.5 road miles southeast of Myton, UT in the lower Pleasant Valley area of the Monument Butte Field. It is also about 14 air miles southeast of Roosevelt, Utah. Pariette Draw and Pleasant Valley Wash are the major drainages in the area. Both of these drainages contain perennial streams somewhat consisting of irrigation runoff and seepage occurring above the area. Pleasant Valley Wash joins Pariette Draw in the general area. Pariette Draw runs into the Green River approximately 9 miles downstream above Ouray, Utah. Poorly vegetated or barren flats surrounded by low hills and intersected with deep draws characterize the general area. Access is by State and County and planned or existing oil field development roads. Approximately 6130 feet of new construction will be required to access this well.

This location has been moved from the request site, which is on a moderately steep and rough hill, to the southwest corner of the drilling window. Here it is on the west slope of a broken hill that has multiple rills and gulleys leading from the top. Terrain except on the east part of the location slopes lightly. Moderate erosion has occurred over the entire area. A diversion is planned collecting two drainages on the northeast corner, diverting them to the northwest around the pad. No other diversions are needed. The location will be bermed following drilling to keep runoff off the pad and possible spills on the site. High rocky ridges surround the site on the east and north. No springs, streams or seeps occur in the immediate area. Pariette Draw, which contains a perennial stream, is approximately 1/2 mile to the southwest.

The location appears to be a suitable site for drilling and operating a well and is the best site in the immediate area.

The Kendell Investments LLC owns the surface and minerals are also FEE owned by another entity. Mike Kendell, representing Kendell Investment LLC, attended the pre-site visit. He had no concerns regarding the plan as proposed. A signed surface use agreement exists.

Floyd Bartlett
Onsite Evaluator

9/23/2008
Date / Time

Application for Permit to Drill

Statement of Basis

10/1/2008

Utah Division of Oil, Gas and Mining

Page 2

Conditions of Approval / Application for Permit to Drill

Category	Condition
Pits	A synthetic liner with a minimum thickness of 16 mils with a felt subliner shall be properly installed and maintained in the reserve pit.
Surface	The well site shall be bermed to prevent fluids from leaving the pad and overland flow from entering the pad.
Surface	Drainages adjacent to the proposed pad shall be diverted around the location.
Surface	The reserve pit shall be fenced upon completion of drilling operations.

ON-SITE PREDRILL EVALUATION

Utah Division of Oil, Gas and Mining

Operator NEWFIELD-PRODUCTION COMPANY
Well Name OSMOND-MEYER 9-28-4-1E
API Number 43-047-40261-0 **APD No** 901 **Field/Unit** WINDY RIDGE
Location: 1/4,1/4 NESE **Sec** 28 **Tw** 4S **Rng** 1E 1853 FSL 783 FEL
GPS Coord (UTM) 595427 4439680 **Surface Owner**

Participants

Floyd Bartlett (DOGM), Kevan Stevens (Newfield), Mike Kendell (Kendell Investments, LLC) and Cory Miller (Tri-State Land Surveying, LLC).

Regional/Local Setting & Topography

The proposed Osmond-Meyer 9-28-4-1E oil well location is approximately 26.5 road miles southeast of Myton, UT in the lower Pleasant Valley area of the Monument Butte Field. It is also about 14 air miles southeast of Roosevelt, Utah. Pariette Draw and Pleasant Valley Wash are the major drainages in the area. Both of these drainages contain perennial streams somewhat consisting of irrigation runoff and seepage occurring above the area. Pleasant Valley Wash joins Pariette Draw in the general area. Pariette Draw runs into the Green River approximately 9 miles downstream above Ouray, Utah. Poorly vegetated or barren flats surrounded by low hills and intersected with deep draws characterize the general area. Access is by State and County and planned or existing oil field development roads. Approximately 6130 feet of new construction will be required to access this well.

This location has been moved from the request site, which is on a moderately steep and rough hill, to the southwest corner of the drilling window. Here it is on the west slope of a broken hill that has multiple rills and gulleys leading from the top. Terrain except on the east part of the location slopes lightly. Moderate erosion has occurred over the entire area. A diversion is planned collecting two drainages on the northeast corner, diverting them to the northwest around the pad. No other diversions are needed. The location will be bermed following drilling to keep runoff off the pad and possible spills on the site. High rocky ridges surround the site on the east and north. No springs, streams or seeps occur in the immediate area. Pariette Draw, which contains a perennial stream, is approximately 1/2 mile to the southwest.

The location appears to be a suitable site for drilling and operating a well and is the best site in the immediate area.

The Kendell Investments LLC owns the surface and minerals are also FEE owned by another entity. Mike Kendell, representing Kendell Investment LLC, attended the pre-site visit. He had no concerns regarding the plan as proposed. A signed surface use agreement exists.

Surface Use Plan

Current Surface Use

- Grazing
- Recreational
- Wildlife Habitat

New Road

Miles	Well Pad	Src Const Material	Surface Formation
1.1	Width 199 Length 290	Onsite	UNTA

Ancillary Facilities N

Waste Management Plan Adequate?

Environmental Parameters

Affected Floodplains and/or Wetland N

Flora / Fauna

Mostly barren. A few plants of Gardiner saltbrush, broom snakeweed, curly mesquite grass, sand dropseed, cheatgrass, halogeton, shadscale, globe mallow, buckwheat and rabbit brush exist.

Cattle, prairie dogs, antelope, small mammals and birds.

Soil Type and Characteristics

Surface soils mostly consist of a side slope with a moderately deep rocky sandy loam with exposed sandstone bedrock and erosion pavement..

Erosion Issues Y

Moderate erosion has occurred over the entire area.

Sedimentation Issues Y

The location will be bermed following drilling to keep runoff off the pad and possible spills on the site.

Site Stability Issues N

Drainage Diverson Required Y

A diversion is planned collecting two drainages on the northeast corner, diverting them to the northwest around the pad

Berm Required? Y

The location will be bermed following drilling to keep runoff off the pad and possible spills on the site.

Erosion Sedimentation Control Required? Y

The location will be bermed following drilling to keep runoff off the pad and possible spills on the site.

Paleo Survey Run? N Paleo Potental Observed? N Cultural Survey Run? N Cultural Resources?

Reserve Pit

Site-Specific Factors		Site Ranking	
Distance to Groundwater (feet)	100 to 200	5	
Distance to Surface Water (feet)	>1000	0	
Dist. Nearest Municipal Well (ft)	>5280	0	
Distance to Other Wells (feet)	300 to 1320	10	
Native Soil Type	Mod permeability	10	
Fluid Type	Fresh Water	5	
Drill Cuttings	Normal Rock	0	
Annual Precipitation (inches)	<10	0	
Affected Populations	<10	0	
Presence Nearby Utility Conduits	Not Present	0	
		Final Score	Sensitivity Level
		30	

Characteristics / Requirements

A reserve pit 40' x 70' x 8' deep will be located in an area of cut on the northeast side of the location. A pit liner is required. Newfield commonly uses a 16-mil liner.


Closed Loop Mud Required? N Liner Required? Y Liner Thickness 16 Pit Underlayment Required? Y

Other Observations / Comments

Floyd Bartlett
Evaluator

9/23/2008
Date / Time

Casing Schematic

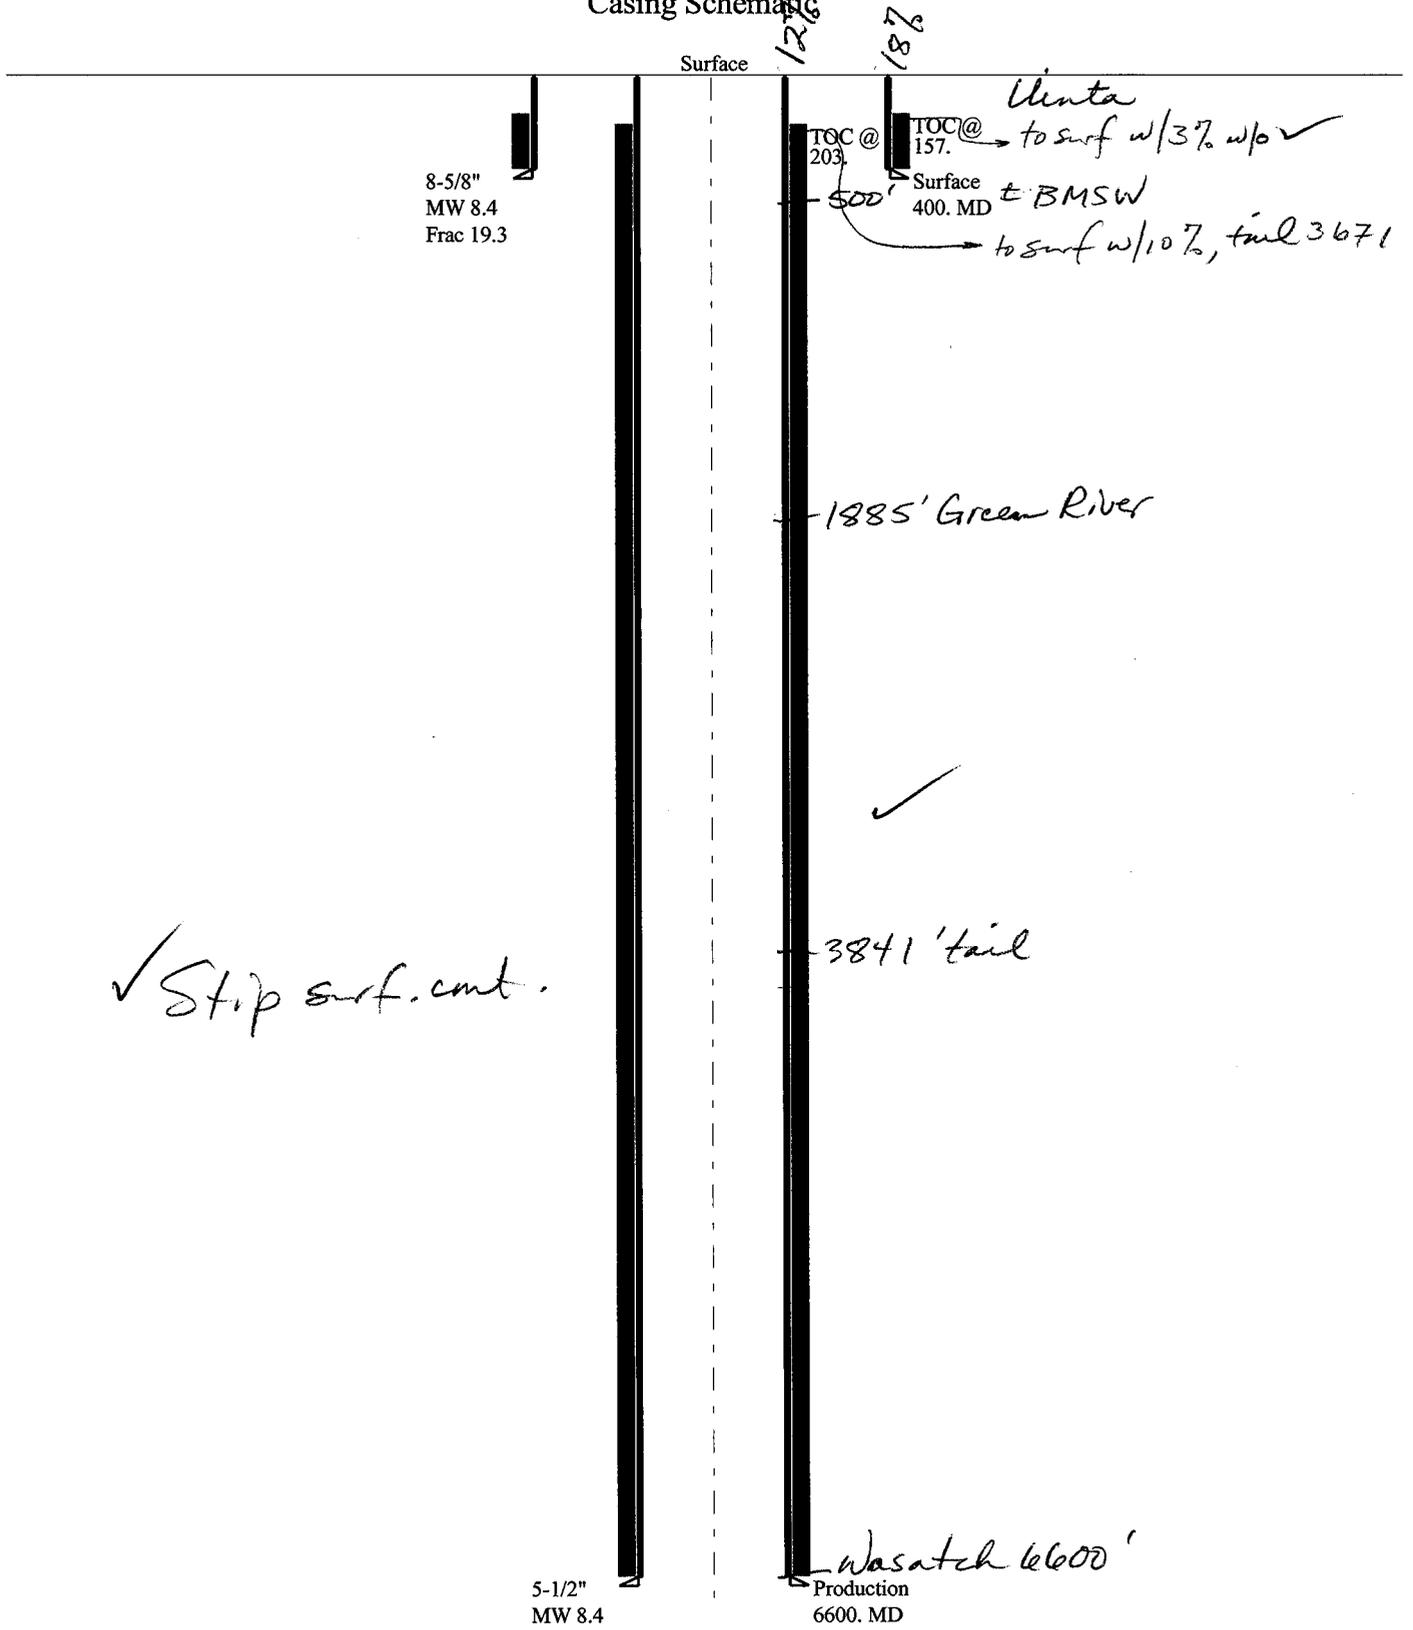

Well name:

4304740261000 Osmund-Meyer 9-28-4-1EOperator: **Newfield Production Company**String type: **Surface**

Project ID:

43-047-40261-0000

Location: **Uintah County****Design parameters:****Collapse**Mud weight: 8.400 ppg
Design is based on evacuated pipe.**Minimum design factors:****Collapse:**

Design factor 1.125

Burst:

Design factor 1.00

Environment:H2S considered? No
Surface temperature: 65 °F
Bottom hole temperature: 71 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 185 ft

Cement top: 157 ft

BurstMax anticipated surface pressure: 352 psi
Internal gradient: 0.120 psi/ft
Calculated BHP 400 psi

No backup mud specified.

Tension:8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)

Tension is based on air weight.

Neutral point: 349 ft

Non-directional string.**Re subsequent strings:**Next setting depth: 6,600 ft
Next mud weight: 8.400 ppg
Next setting BHP: 2,880 psi
Fracture mud wt: 19.250 ppg
Fracture depth: 400 ft
Injection pressure: 400 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft ³)
1	400	8.625	24.00	J-55	ST&C	400	400	7.972	143
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	175	1370	7.851	400	2950	7.38	10	244	25.42 J

Prepared by: Helen Sadik-Macdonald
Div of Oil, Gas & Minerals

Phone: 810-538-5357

Date: October 14, 2008
Salt Lake City, Utah**ENGINEERING STIPULATIONS: NONE**

Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Collapse is based on a vertical depth of 400 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:

43047402610000 Osmund-Meyer 9-28-4-1EOperator: **Newfield Production Company**

String type: Production

Project ID:

43-047-40261-0000

Location: Uintah County

Design parameters:**Collapse**Mud weight: 8.400 ppg
Design is based on evacuated pipe.**Minimum design factors:****Collapse:**

Design factor 1.125

Burst:

Design factor 1.00

Environment:H2S considered? No
Surface temperature: 65 °F
Bottom hole temperature: 157 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 368 ft

Cement top: 203 ft

BurstMax anticipated surface
pressure: 1,428 psi
Internal gradient: 0.220 psi/ft
Calculated BHP 2,880 psi

No backup mud specified.

Tension:8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)**Non-directional string.**

Tension is based on air weight.

Neutral point: 5,761 ft

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft ³)
1	6600	5.5	15.50	J-55	LT&C	6600	6600	4.825	882
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	2880	4040	1.403	2880	4810	1.67	102	217	2.12 J

Prepared by: Helen Sadik-Macdonald
Div of Oil, Gas & Minerals

Phone: 810-538-5357

Date: October 14, 2008
Salt Lake City, Utah**ENGINEERING STIPULATIONS: NONE**

Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Collapse is based on a vertical depth of 6600 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

BOPE REVIEW

Newfield Osmond-Meyer 9-28-4-1E

API 43-047-40261-0000

INPUT

Well Name

Newfield Osmond-Meyer 9-28-4-1E API 43-047-40261-0000

Casing Size (")

String 1	String 2		
8 5/8	5 1/2		
400	6600		
0	400		
8.4	8.4		
0	2000		
2950	4810		
2858	8.3 ppg		

Setting Depth (TVD)

Previous Shoe Setting Depth (TVD)

Max Mud Weight (ppg)

BOPE Proposed (psi)

Casing Internal Yield (psi)

Operators Max Anticipated Pressure (psi)

Calculations

String 1

8 5/8 "

Max BHP [psi]

$.052 * \text{Setting Depth} * \text{MW} =$

175

BOPE Adequate For Drilling And Setting Casing at Depth?

MASP (Gas) [psi]

$\text{Max BHP} - (0.12 * \text{Setting Depth}) =$

127

NO

Air drill

MASP (Gas/Mud) [psi]

$\text{Max BHP} - (0.22 * \text{Setting Depth}) =$

87

NO

***Can Full Expected Pressure Be Held At Previous Shoe?**

Pressure At Previous Shoe

$\text{Max BHP} - .22 * (\text{Setting Depth} - \text{Previous Shoe Depth}) =$

87

← NO

Reasonable depth

Required Casing/BOPE Test Pressure

400 psi

*Max Pressure Allowed @ Previous Casing Shoe =

0 psi

*Assumes 1psi/ft frac gradient

Calculations

String 2

5 1/2 "

Max BHP [psi]

$.052 * \text{Setting Depth} * \text{MW} =$

2883

BOPE Adequate For Drilling And Setting Casing at Depth?

MASP (Gas) [psi]

$\text{Max BHP} - (0.12 * \text{Setting Depth}) =$

2091

NO

MASP (Gas/Mud) [psi]

$\text{Max BHP} - (0.22 * \text{Setting Depth}) =$

1431

YES ✓

***Can Full Expected Pressure Be Held At Previous Shoe?**

Pressure At Previous Shoe

$\text{Max BHP} - .22 * (\text{Setting Depth} - \text{Previous Shoe Depth}) =$

1519

← NO

Reasonable

Required Casing/BOPE Test Pressure

2000 psi

*Max Pressure Allowed @ Previous Casing Shoe =

400 psi

*Assumes 1psi/ft frac gradient

STATE OF UTAH
DIVISION OF OIL, GAS AND MINING

APPLICATION FOR PERMIT TO DRILL, DEEPEN		5. LEASE DESIGNATION AND SERIAL NO. FEE	
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME N/A	
1a. TYPE OF WORK DRILL <input type="checkbox"/> DEEPEN <input checked="" type="checkbox"/> RE-ENTER <input type="checkbox"/>		7. UNIT AGREEMENT NAME N/A	
1b. TYPE OF WELL OIL <input checked="" type="checkbox"/> GAS <input type="checkbox"/> OTHER <input type="checkbox"/> SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input checked="" type="checkbox"/>		8. FARM OR LEASE NAME N/A	
2. NAME OF OPERATOR Newfield Production Company		9. WELL NO. Osmond-Meyer 9-28-41E	
3. ADDRESS AND TELEPHONE NUMBER: Route #3 Box 3630, Myton, UT 84052 Phone: (435) 646-3721		10. FIELD AND POOL OR WILDCAT Monument Butte Windy Ridge	
4. LOCATION OF WELL (FOOTAGE) At Surface NE/SE 595415 X 1853' FSL 783' FEL 40.103761 At proposed Producing Zone 4439664Y -109.880542		11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NE/SE Sec. 28, T4S, R1E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE* Approximately 26.5 miles southeast of Myton, UT		12. County Utah	13. STATE UT
15. DISTANCE FROM PROPOSED* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any) Approx. 533' f/lse line and NA' f/unit line	16. NO. OF ACRES IN LEASE NA	17. NO. OF ACRES ASSIGNED TO THIS WELL 40	
18. DISTANCE FROM PROPOSED LOCATION* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR ON THIS LEASE, FT. Approx. 1137'	19. PROPOSED DEPTH 6600'	20. ROTARY OR CABLE TOOLS Rotary	
21. ELEVATIONS (Show whether DF, RT, GR, etc.) 4994' GL		22. APPROX. DATE WORK WILL START* 4th Quarter 2008	

23. **PROPOSED CASING AND CEMENTING PROGRAM**

SIZE OF HOLE	SIZE OF CASING	WEIGHT/FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4	8 5/8	24#	400'	155 sx +/- 10%
7 7/8	5 1/2	15.5#	TD	275 sx lead followed by 450 sx tail
				See Detail Below

DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give date on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

***The actual cement volumes will be calculated off of the open hole logs, plus 15% excess:**

SURFACE PIPE - 155 sx Class G Cement +/- 10%, w/ 2% CaCl2 & 1/4#/sk Cello-flake
Weight: 15.8 PPG YIELD: 1.17 Cu Ft/sk H2O Req: 5 gal/sk

LONG STRING - Lead: Premium Lite II Cement + 3lbs/sk BA-90 + 3% KCl + .25 lbs/sk Cello Flake + 2 lbs/sk Kol Seal +
10% Bentonite + .5% Sodium Metasilicate
Weight: 11.0 PPG YIELD: 3.43 Cu Ft/sk H2O Req: 21.04 gal/sk

Tail: 50-50 Poz-Class G Cement + 3% KCl + .25 lbs/sk Cello Flake + 2% Bentonite + .3% Sodium Metasilicate
Weight: 14.2 PPG YIELD: 1.59 Cu Ft/sk H2O Req: 7.88 gal/sk

24. Name & Signature: *Mandie Crozier* Title: Regulatory Specialist Date: 10/14/2008
Mandie Crozier

(This space for State use only)

API Number Assigned: 43-047-40261 APPROVAL: _____

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 11-05-08
By: *[Signature]*

RECEIVED
OCT 14 2008
DIV. OF OIL, GAS & MINING

*See Instructions On Reverse Side



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

November 5, 2008

Newfield Production Company
Rt. #3, Box 3630
Myton, UT 84052

Re: Osmond-Meyer 9-28-4-1E Well, 1853' FSL, 783' FEL, NE SE, Sec. 28, T. 4 South,
R. 1 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-40261.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor



Operator: Newfield Production Company

Well Name & Number Osmond-Meyer 9-28-4-1E

API Number: 43-047-40261

Lease: Fee

Location: NE SE Sec. 28 T. 4 South R. 1 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

The operator is required to notify the Division of Oil, Gas and Mining of the following action during drilling of this well:

- 24 hours prior to cementing or testing casing – contact Dan Jarvis
- 24 hours prior to testing blowout prevention equipment – contact Dan Jarvis
- 24 hours prior to spudding the well – contact Carol Daniels
- Within 24 hours of any emergency changes made to the approved drilling program – contact Dustin Doucet
- Prior to commencing operations to plug and abandon the well – contact Dan Jarvis

The operator is required to get approval from the Division of Oil, Gas and Mining before performing any of the following actions during the drilling of this well:

- Plugging and abandonment or significant plug back of this well – contact Dustin Doucet
- Any changes to the approved drilling plan – contact Dustin Doucet

The following are Division of Oil, Gas and Mining contacts and their telephone numbers (please leave a voice mail message if the person is not available to take the call):

- Dan Jarvis at: (801) 538-5338 office (801) 942-0871 home
- Carol Daniels at: (801) 538-5284 office
- Dustin Doucet at: (801) 538-5281 office (801) 733-0983 home

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.
6. Surface casing shall be cemented to the surface.

Spud
BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# Ross Rig #
21 Submitted By Don Bastian
Phone Number 435-823-6012
Well Name/Number Osmond-Meyer 9-28-4-1E
Qtr/Qtr NE/SE Section 28 Township 4S Range
1E
Lease Serial Number _____
Fee _____
API Number 43-047-
40261

Spud Notice – Spud is the initial spudding of the well, not drilling out below a casing string.

Date/Time 1/26/09 9:00 AM PM

Casing – Please report time casing run starts, not cementing times.

- Surface Casing
- Intermediate Casing
- Production Casing
- Liner
- Other

Date/Time 1/27/09 10:00 AM PM

BOPE

- Initial BOPE test at surface casing point
- BOPE test at intermediate casing point
- 30 day BOPE test
- Other

Date/Time _ _ AM PM

Remarks _____

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

5. LEASE DESIGNATION AND SERIAL NUMBER:
FEE

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, recenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

1. TYPE OF WELL: OIL WELL GAS WELL OTHER

8. WELL NAME and NUMBER:
OSMOND-MEYER 9-28-4-1E

2. NAME OF OPERATOR:
NEWFIELD PRODUCTION COMPANY

9. API NUMBER:
4304740261

3. ADDRESS OF OPERATOR:
Route 3 Box 3630 CITY Myton STATE UT ZIP 84052

PHONE NUMBER
435.646.3721

10. FIELD AND POOL, OR WILDCAT:
MONUMENT BUTTE

4. LOCATION OF WELL:

FOOTAGES AT SURFACE:

COUNTY: UINTAH

OTR/OTR. SECTION. TOWNSHIP. RANGE. MERIDIAN: NESE, 28, T4S, R1E

STATE: UT

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will <hr/>	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of Work Completion: <u>02/01/2009</u>	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARITLY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLAIR
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/STOP)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: - Spud Notice
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	


12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

On 1/26/09 MIRU Ross spud rig #21. Drill 447' of 12 1/4" hole with air mist. TIH W/10 Jt's 8 5/8" J-55 24# csgn. Set @ 450' KB. On 1/31/09 Cement with 218 sks of Class "G" w/ 2% CaCL+ 1/4# Cello Flake. Mixed @ 15.8 ppg> 1.17 cf/sk yeild. Returned 7 bbls cement to pit.

NAME (PLEASE PRINT) Johnny Davis

TITLE Drilling Foreman

SIGNATURE



DATE 02/01/2009

(This space for State use only)

RECEIVED
FEB 05 2009
DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

5. LEASE DESIGNATION AND SERIAL NUMBER:
FEE

SUNDRY NOTICES AND REPORTS ON WELLS

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL: OIL WELL GAS WELL OTHER

8. WELL NAME and NUMBER:
OSMOND-MEYER 9-28-4-1E

2. NAME OF OPERATOR:
NEWFIELD PRODUCTION COMPANY

9. API NUMBER:
4304740261

3. ADDRESS OF OPERATOR:
Route 3 Box 3630 CITY Myton STATE UT ZIP 84052

PHONE NUMBER
435.646.3721

10. FIELD AND POOL, OR WILDCAT:
MONUMENT BUTTE

4. LOCATION OF WELL:
FOOTAGES AT SURFACE:

COUNTY: UINTAH

OTR/OTR. SECTION. TOWNSHIP. RANGE. MERIDIAN: NESE, 28, T4S, R1E

STATE: UT

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARITLY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of Work Completion: 02/10/2009	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/STOP)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: - Weekly Status Report
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

On 2/4/09 MIRU NDSI Rig # 3. Set all equipment. Pressure test Kelly, TIW, Choke manifold, & Bop's to 2,000 psi. Test 8.625 csgn to 1,500 psi. Vernal BLM field, & Roosevelt DOGM office was notified of test. PU BHA and tag cement @ 380'. Drill out cement & shoe. Drill a 7.875 hole with fresh water to a depth of 6380'. Lay down drill string & BHA. Open hole log w/ Dig/SP/GR log's TD to surface. PU & TIH with Guide shoe, shoe jt, float collar, 159 jt's of 5.5 J-55, 15.5# csgn. Set @ 6377.99' KB. Cement with 300 sks cement mixed @ 11.0 ppg & 3.43 yld. The 425 sks cement mixed @ 14.4 ppg & 1.24 yld. Returned 0 bbls of cement to reserve pit. Nipple down Bop's. Drop slips @ 120,000 #'s tension. Release rig @ 6:30 PM on 2/9/09.

NAME (PLEASE PRINT) Jim Smith

TITLE Drilling Foreman

SIGNATURE 

DATE 02/10/2009

(This space for State use only)

RECEIVED
FEB 18 2009

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

5. LEASE DESIGNATION AND SERIAL NUMBER:
FEE

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

1. TYPE OF WELL: OIL WELL GAS WELL OTHER

8. WELL NAME and NUMBER:
OSMOND MEYER 9-28-4-1E

2. NAME OF OPERATOR:
NEWFIELD PRODUCTION COMPANY

9. API NUMBER:
4304740261

3. ADDRESS OF OPERATOR:
Route 3 Box 3630 CITY Myton STATE UT ZIP 84052

PHONE NUMBER
435.646.3721

10. FIELD AND POOL, OR WILDCAT:
MONUMENT BUTTE

4. LOCATION OF WELL:
FOOTAGES AT SURFACE:

COUNTY: UINTAH

OTR/OTR. SECTION. TOWNSHIP. RANGE. MERIDIAN: NESE, 28, T4S, R1E

STATE: UT

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of Work Completion: 05/15/2009	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/STOP)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: - Weekly Status Report
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The above subject well was completed on 04/06/09, attached is a daily completion status report.

NAME (PLEASE PRINT) Jentri Park

TITLE Production Clerk

SIGNATURE 

DATE 05/15/2009

(This space for State use only)

RECEIVED

MAY 21 2009

DIV. OF OIL, GAS & MINING

Daily Activity Report

Format For Sundry

OSMOND-MEYER 9-28-4-1E

2/1/2009 To 6/30/2009

3/23/2009 Day: 1

Completion

Rigless on 3/23/2009 - Run CBL & shoot first stage.- Install 5M frac head. NU 6" 5M Cameron BOP. RU H/O truck & pressure test casing, blind rams, frac head & casing valves to 4500 psi. RU Perforators LLC WLT w/ mast & run CBL under pressure. WLTD @ 6287' cement top @ 610'. Perforate stage #1. CP4 sds @ 6150-61' w/ 3 1/8" slick guns (19 gram, .49" HE, 120°, 21.92" pen, EXP-3319-331 Titan) w/ 4 spf for total of 44 shots. 146 BWTR. SIFN.

3/30/2009 Day: 2

Completion

Rigless on 3/30/2009 - Frac 5 stages & flowback well.- Stage #1, CP4 sands. RU BJ Services. 55 psi on well. Frac CP4 sds w/ 45,931#'s of 20/40 sand in 473 bbls of Lightning 17 fluid. Broke @ 4006 psi. Pumped 780 gals of fresh wtr mixed with 30 gals of Techni-Hib 767W. Treated w/ ave pressure of 1900 psi @ ave rate of 24.6 BPM. Pumped 504 gals of 15% HCL in flush for Stage #2. ISIP 1758 psi. Leave pressure on well. RU Perforators LLC WLT, crane & lubricator. RIH w/ Weatherford 5-1/2" 5K composite flow through frac plug, 8' perf gun. Set plug @ 6050'. Perforate CP1 sds @ 5995-6003' w/ 3 1/8" slick guns (19 gram, .49" HE, 120°, 21.92" pen, EXP-3319-331 Titan) w/ 4 spf for total of 32 shots. 619 BWTR, Stage #2, CP1 sands. RU BJ Services. 1270 psi on well. Frac CP1 sds w/ 40,800#'s of 20/40 sand in 435 bbls of Lightning 17 fluid. Broke @ 3050 psi. Pumped 780 gals of fresh wtr mixed with 30 gals of Techni-Hib 767W. Treated w/ ave pressure of 1876 psi @ ave rate of 25.3 BPM. Pumped 504 gals of 15% HCL in flush for Stage #3. ISIP 1668 psi. Leave pressure on well. RU Perforators LLC WLT, crane & lubricator. RIH w/ Weatherford 5-1/2" 5K composite flow through frac plug, 24' perf gun. Set plug @ 5450'. Perforate C sds @ 5364-88' w/3 1/8" slick guns (19 gram, .49" HE, 120°, 21.92" pen, EXP-3319-331 Titan) w/ 4 spf for total of 96 shots. 1054 BWTR, Stage #5, GB4 sands. RU BJ Services. 1777 psi on well. Frac GB4 sds w/ 35,409#'s of 20/40 sand in 425 bbls of Lightning 17 fluid. Broke @ 3499 psi. Pumped 780 gals of fresh wtr mixed with 30 gals of Techni-Hib 767W. Treated w/ ave pressure of 2210 psi @ ave rate of 25.6 BPM. ISIP 1601 psi. 2706 BWTR. Open well for immediate flowback @ 3 BPM. Well flowed for 3 1/2 hours & died. Recovered total of 540 bbls. 2166 BWTR., Stage #4, D1 & DS3 sands. RU BJ Services. 1100 psi on well. Frac D1 & DS3 sds w/ 20,099#'s of 20/40 sand in 315 bbls of Lightning 17 fluid. Broke @ 3517 psi. Pumped 780 gals of fresh wtr mixed with 30 gals of Techni-Hib 767W. Treated w/ ave pressure of 2349 psi @ ave rate of 25.5 BPM. Pumped 504 gals of 15% HCL in flush for Stage #5. ISIP 2723 psi. Leave pressure on well. RU Perforators LLC WLT, crane & lubricator. RIH w/ Weatherford 5-1/2" 5K composite flow through frac plug, 7' perf gun. Set plug @ 4700'. Perforate GB4 sds @ 4646-53' w/3 1/8" slick guns (19 gram, .49" HE, 120°, 21.92" pen, EXP-3319-331 Titan) w/ 4 spf for total of 44 shots. 2281 BWTR, Stage #3, C sands. RU BJ Services. 1265 psi on well. Frac C sds w/ 125,483#'s of 20/40 sand in 912 bbls of Lightning 17 fluid. Broke @ 2076 psi. Pumped 780 gals of fresh wtr mixed with 30 gals of Techni-Hib 767W. Treated w/ ave pressure of 3205 psi @ ave rate of 27.3 BPM. Pumped 504 gals of 15% HCL in flush for Stage #4. ISIP 4200 psi. Leave pressure on well. RU Perforators LLC WLT, crane & lubricator. RIH w/ Weatherford 5-1/2" 5K composite solid plug, 6'&5' perf guns. Set plug @ 5250'. Perforate D1 & DS3 sds @ 5170-76 & 5092-97' w/3 1/8" slick guns (19 gram, .49" HE, 120°, 21.92" pen, EXP-3319-331 Titan) w/ 4 spf for total of 44 shots. 1966 BWTR

4/1/2009 Day: 3

Completion

Leed #731 on 4/1/2009 - MIRU LEED #731 & drill out 1st two plugs.- MIRU LEED #731. ND frac BOPs & frac head. NU production wellhead & BOPs. MU 4 3/4" chomp bit & bit sub. Talley

& PU 152- jts "A" grade 2 7/8" J-55 6.5# 8rd EUE tbg. Tag fill @ 4696', clean out to plug @ 4700'. Drill out plug in 15 minutes. PU 13- jts tbg & tag fill @ 5140', clean out to plug @ 5250'. Drill out plug in 25 min. Circulate well for 1 1/2 hours to clean up sand. SWIFN. Recovered 60 BW, 2106 BWTR.

4/2/2009 Day: 4**Completion**

Leed #731 on 4/2/2009 - Swab & Trip production.- Check pressure on well, 50 psi tbg & csg. PU 7- jts tbg & tag fill @ 5447', clean out to plug @ 5450'. Drill out plug in 15 min. PU 19- jts tbg & tag fill @ 6042', clean out to plug @ 6050'. Drill out plug in 45 min. PU 9- jts tbg & tag fill @ 6328', clean out to PBTD @ 6340'. Circulate well clean for 2 hours, giving up sand & water, recovered 80 BW. RU swab equip. Made 7 swab runs w/ SFL @ surface & EFL @ 800'. Recovered 150 bbls ending w/ trace of sand, oil & gas. RD swab equip. PU 2- jts tbg & tag fill @ 6332', clean out to PBTD @ 6340', circulate well clean. LD 4- jts tbg, TOOH w/ 200- jts tbg, bit sub & chomp bit. MU 2 7/8" Notched collar, 2- jts 2 7/8" J-55 tbg, SN, 1- jt 2 7/8" J-55 tbg, TA, 197- jts 2 7/8" J-55 tbg. SWIFN. Est 1876 BWTR.

4/6/2009 Day: 5**Completion**

Leed #731 on 4/6/2009 - PU rods & PWOP.- PU 99- 7/8" guided rods, 1-8', 2' X 7/8" pony rods & 1 1/2" X 26' polished rod. Fill tbg w/ 1/2 BW & stroke test pump w/ rig to 800 psi. RU pumping unit. RDMOSU. PWOP @ 3:00 pm w/ 102" SL & 5 SPM. Est 1876 BWTR. **Finalized**

Pertinent Files: Go to File List

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5. Lease Serial No.
FEE

1a. Type of Well Oil Well Gas Well Dry Other
 b. Type of Completion: New Well Work Over Deepen Plug Back Diff. Resvr.,
 Other: _____

6. If Indian, Allottee or Tribe Name
NA

7. Unit or CA Agreement Name and No.
FEE

2. Name of Operator
NEWFIELD EXPLORATION COMPANY

8. Lease Name and Well No.
OSMOND-MEYER 9-28-4-1E

3. Address
1401 17TH ST. SUITE 1000 DENVER, CO 80202

3a. Phone No. (include area code)
(435)646-3721

9. AFI Well No.
43-047-40261

4. Location of Well (Report location clearly and in accordance with Federal requirements)*
 At surface 1853' FSL & 783' FEL (NE/SE) SEC. 28, T4S, R1E
 At top prod. interval reported below
 At total depth 6375'

10. Field and Pool or Exploratory
MONUMENT BUTTE

11. Sec., T., R., M., on Block and Survey or Area
SEC. 28, T4S, R1E

12. County or Parish
UINTAH

13. State
UT

14. Date Spudded
01/26/2009

15. Date T.D. Reached
02/07/2009

16. Date Completed 04/05/2009
 D & A Ready to Prod.

17. Elevations (DF, RKB, RT, GL)*
4994' GL 5006' KB

18. Total Depth: MD 6321' ~~6321'~~ 6380-DR
TVD 6185'

19. Plug Back T.D.: MD 6291'
TVD

20. Depth Bridge Plug Set: MD
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
 DUAL IND GRD, SP, COMP. DENSITY, COMP. NEUTRON, GR, CALIPER, CMT BOND

22. Was well cored? No Yes (Submit analysis)
 Was DST run? No Yes (Submit report)
 Directional Survey? No Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sk. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12-1/4"	8-5/8" J-55	24#		450'		218 CLASS G			
7-7/8"	5-1/2" J-55	15.5#		6378'		300 PRIMLITE		610'	
						425 50/50 POZ			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-7/8"	EOT@ 6224'	TA @6129'						

25. Producing Intervals

Formation	Top	Bottom	Perforation Interval	Size	No. Holes	Perf. Status
A) GREEN RIVER			(CP4) 6150-6161'	.49"	4	44
B) GREEN RIVER			(CP1) 5995-6003'	.49"	4	32
C) GREEN RIVER			(C) 5364-5388'	.49"	4	96
D) GREEN RIVER			(D1)(DS3)5170-76,5092-97'	.49"	4	44

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

Depth Interval	Amount and Type of Material
6150-6161'	Frac w/ 45931# of 20/40 snd 473 bbls fluid
5995-6003'	Frac w/ 408000# 20/40 snd 485 bbls fluid
5364-5388'	Frac w/ 125438# 20/40 snd 912 bbls fluid
5092-5176'	Frac w/ 20099# 20/40 snd 315 bbls fluid

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
04/05/09	04/19/09	24	→	90	25	42			2-1/2" x 1-1/2" x 20' RHAC Pump
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→					PRODUCING	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

RECEIVED

JUN 08 2009

DIV. OF OIL, GAS & MINING

*(See instructions and spaces for additional data on page 2)

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

29. Disposition of Gas (Solid, used for fuel, vented, etc.)

USED FOR FUEL

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

GEOLOGICAL MARKERS

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
				GARDEN GULCH MRK GARDEN GULCH 1	4186' 4352'
				GARDEN GULCH 2 POINT 3	4474' 4770'
				X MRKR Y MRKR	4964' 5000'
				DOUGALS CREEK MRK BI CARBONATE MRK	5144' 5458'
				B LIMESTON MRK CASTLE PEAK	5606' 5932'
				BASAL CARBONATE TOTAL DEPTH (LOGGERS)	NOT PRESENT 6324'


32. Additional remarks (include plugging procedure):

(GB4) 4646-4653' .49" 4/28 4646-4653' Frac w/ 35049 #'s of 20/40 sand in 425 bbls of fluid

33. Indicate which items have been attached by placing a check in the appropriate boxes:

- Electrical/Mechanical Logs (1 full set req'd.)
 Geologic Report
 DST Report
 Directional Survey
 Sundry Notice for plugging and cement verification
 Core Analysis
 Other:

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) Tammi Lee Title Production Clerk
 Signature  Date 05/13/2009

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.