

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0136  
Expires July 31, 2010

**APPLICATION FOR PERMIT TO DRILL OR REENTER**

1a. Type of Work: <input type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU01304
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator EOG RESOURCES, INC. Contact: KAYLENE R GARDNER E-Mail: kaylene_gardner@eogresources.com		7. If Unit or CA Agreement, Name and No.
3a. Address 1060 EAST HIGHWAY 40 VERNAL, UT 84078		8. Lease Name and Well No. EAST CHAPITA 110-05
3b. Phone No. (include area code) Ph: 435-781-9111		9. API Well No. <b>43-047-40509</b>
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface SENW 2517FNL 1322FWL 40.06508 N Lat, 109.35559 W Lon At proposed prod. zone SENW 2517FNL 1322FWL 40.06508 N Lat, 109.35559 W Lon		10. Field and Pool, or Exploratory NATURAL BUTTES
14. Distance in miles and direction from nearest town or post office* 43.9 MILES SOUTH OF VERNAL		11. Sec., T., R., M., or Blk. and Survey or Area Sec 5 T9S R23E Mer SLB
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1322	16. No. of Acres in Lease 2451.00	12. County or Parish UINTAH
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 860	19. Proposed Depth 9590 MD	13. State UT
21. Elevations (Show whether DF, KB, RT, GL, etc.) 4876 GL	22. Approximate date work will start	17. Spacing Unit dedicated to this well
		20. BLM/BIA Bond No. on file NM 2308
		23. Estimated duration 45-DAYS

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature (Electronic Submission)	Name (Printed/Typed) KAYLENE R GARDNER Ph: 435-781-9111	Date 01/22/2009
Title REGULATORY ADMINISTRATOR		
Approved by (Signature)	Name (Printed/Typed) BRADLEY G. HILL	Date 02-18-09
Title	Office ENVIRONMENTAL MANAGER	

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**Additional Operator Remarks (see next page)**

Electronic Submission #66564 verified by the BLM Well Information System  
For EOG RESOURCES, INC., sent to the Vernal

**RECEIVED**

JAN 28 2009

DIV. OF OIL, GAS & MINING

**Federal Approval of this  
Action is Necessary**


**\*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED \*\***

640299X  
44360684  
40.065093  
109.354895

# T9S, R23E, S.L.B.&M.

EOG RESOURCES, INC.

Well location, EAST CHAPITA #110-5, located as shown in the SE 1/4 NW 1/4 of Section 5, T9S, R23E, S.L.B.&M., Uintah County, Utah.

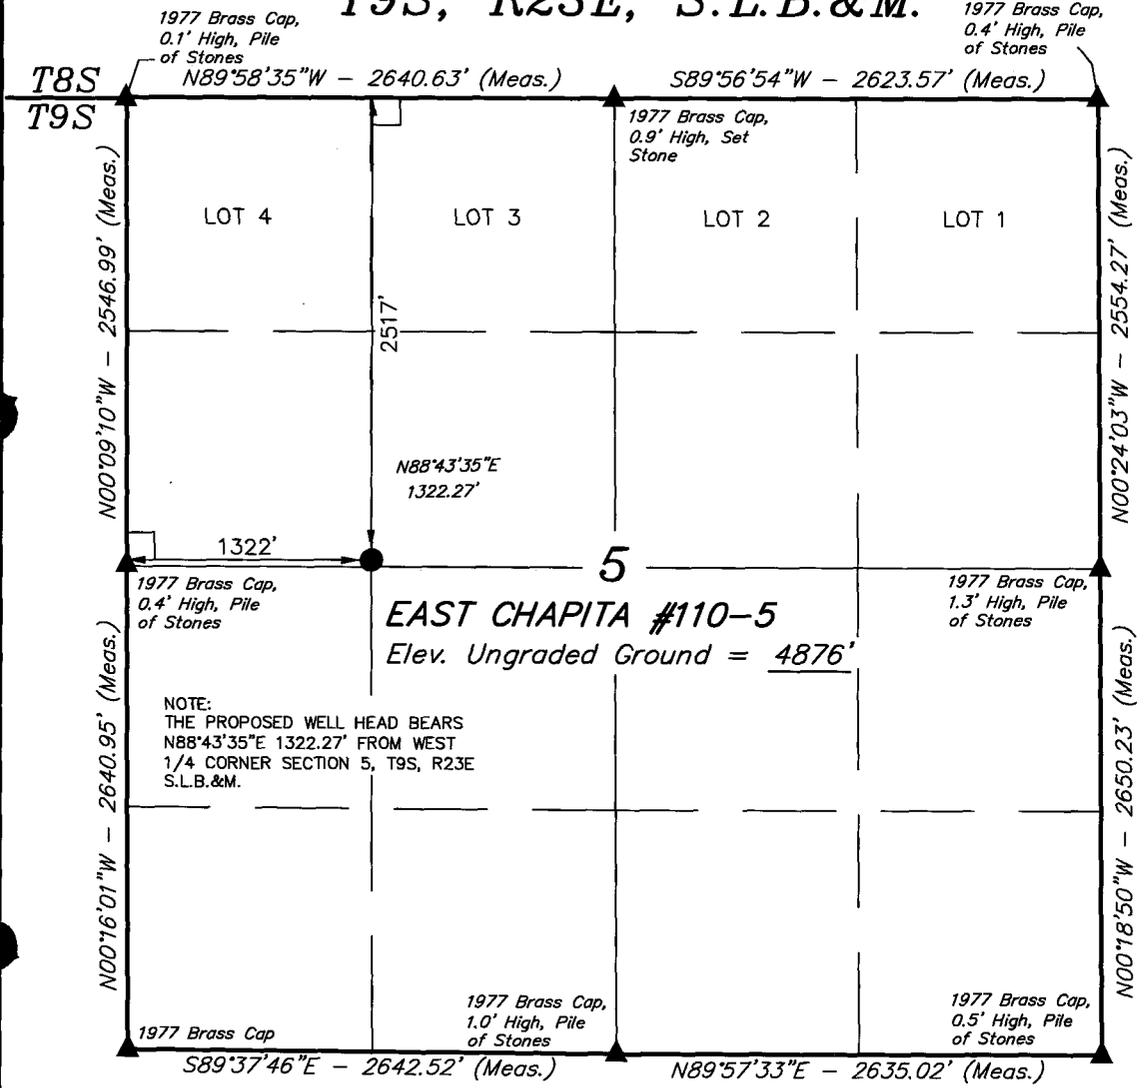


### BASIS OF ELEVATION

BENCH MARK 58 EAM (1965) LOCATED IN THE NE 1/4 OF SECTION 30, T9S, R23E, S.L.B.&M. TAKEN FROM THE RED WASH SE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5132 FEET.

### BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

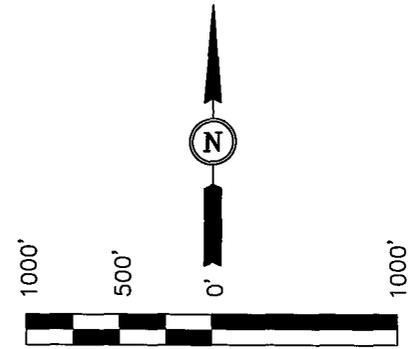

SCALE

### CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

*Robert Kay*  
 REGISTERED LAND SURVEYOR  
 REGISTRATION NO. 161319  
 STATE OF UTAH

**UINTAH ENGINEERING & LAND SURVEYING**  
 85 SOUTH 200 EAST - VERNAL, UTAH 84078  
 (435) 789-1017

### LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)  
 LATITUDE = 40°03'54.30" (40.065083)  
 LONGITUDE = 109°21'20.14" (109.355594)  
 (NAD 27)  
 LATITUDE = 40°03'54.43" (40.065119)  
 LONGITUDE = 109°21'17.69" (109.354914)

SCALE 1" = 1000'	DATE SURVEYED: 11-05-08	DATE DRAWN: 11-12-08
PARTY J.M. E.D. S.P.	REFERENCES G.L.O. PLAT	
WEATHER COOL	FILE EOG RESOURCES, INC.	

STATE OF UTAH )

) ss

COUNTY OF UINTAH )

VERIFICATION

Kaylene R. Gardner, of lawful age, being first duly sworn upon oath, deposes and says:

She is the Regulatory Administrator of EOG Resources, Inc., of Vernal, Utah. EOG Resources, Inc. is the operator of the following described well:

**East Chapita 110-05  
2517' FNL - 1322' FWL (SENW)  
SECTION 5, T9S, R23E  
UINTAH COUNTY, UTAH**

EOG Resources, Inc., is the only owners in the well and/or of all contiguous oil and gas leases or drilling units overlying the pool.

On the 22<sup>nd</sup> day of January, 2009 she placed in the United States mail, with postage prepaid, a copy of the attached Application for Commingling in one wellbore for the subject well.

Said envelope which contained these instruments was addressed to the Utah Division of Oil, Gas & Mining, and the Bureau of Land Management.


Further affiant saith not.

  
\_\_\_\_\_  
Kaylene R. Gardner  
Regulatory Administrator


Subscribed and sworn before me this 22<sup>nd</sup> day of January, 2009.

  
\_\_\_\_\_  
Mickenzie Thacker  
Notary Public

My Commission Expires: April 18, 2012



R 23 E

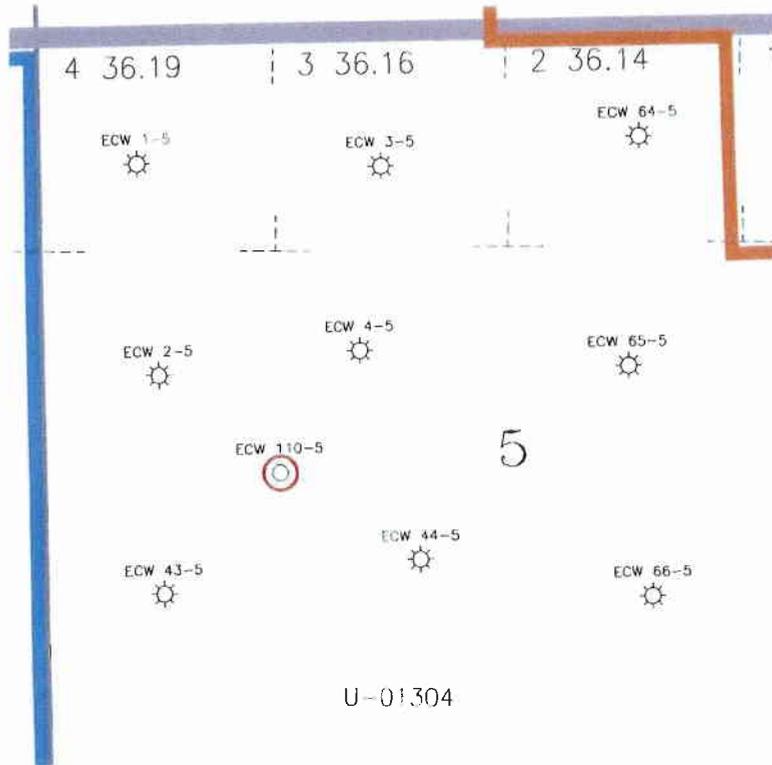


T 9 S

○ EAST CHAPITA 110-5

— Chapito Wells Unit Outline

— Badlands Unit Outline





Denver Division

**EXHIBIT "A"**  
 EAST CHAPITA 110-5  
 Commingling Application  
 Uintah County, Utah

Scale: 1" = 1000'	D:\utah\Commingled1 EC44-5_commingled.dwg Layout1	Author GT	Dec 11, 2008 - 2:59pm
-------------------	---	--------------	--------------------------

**EIGHT POINT PLAN**

**EAST CHAPITA 110-05**  
**SE/NW, SEC. 5, T9S, R23E, S.L.B.&M.**  
**UINTAH COUNTY, UTAH**

**1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:**

<b>FORMATION</b>	<b>TVD-RKB (ft)</b>	<b>Objective</b>	<b>Lithology</b>	
Green River	1,939		Shale	
Birdsnest Zone	2,092		Dolomite	
Mahogany Oil Bed Shale	2,621		Shale	
Wasatch	4,918	Primary	Sandstone	Gas
Chapita Wells	5,515	Primary	Sandstone	Gas
Buck Canyon	6,180	Primary	Sandstone	Gas
North Horn	6,800	Primary	Sandstone	Gas
KMV Price River	7,306	Primary	Sandstone	Gas
KMV Price River Middle	8,090	Primary	Sandstone	Gas
KMV Price River Lower	8,850	Primary	Sandstone	Gas
Sego	9,390		Sandstone	
<b>TD</b>	<b>9,590</b>			

Estimated TD: **9,590'** or **200'±** below TD

**Anticipated BHP: 5,236 Psig**

EOG Resources, Inc. requests authorization for commingling of production from the Wasatch and Mesaverde formations in the referenced wellbore. In the event allocation of production is necessary, the allocation will be based on proportionate net pay as calculated from cased-hole logs. Production from the Wasatch and Mesaverde formations will be commingled in the wellbore and produced through open-ended 2-3/8" tubing landed below all perforations in the 4-1/2" production casing.

1. Fresh Waters may exist in the upper, approximately 1,000 ft ± of the Green River Formation, with top at about 2,000 ft ±.
2. Cement isolation is installed to surface of the well isolating all zones by cement.

**3. PRESSURE CONTROL EQUIPMENT:**

Production Hole – 5000 Psig  
BOP schematic diagrams attached.

**4. CASING PROGRAM:**

<b>CASING</b>	<b>Hole Size</b>	<b>Length</b>	<b>Size</b>	<b>WEIGHT</b>	<b>Grade</b>	<b>Thread</b>	<b>Rating Collapse</b>	<b>Factor Burst</b>	<b>Tensile</b>
<b>Conductor</b>	26"	0 – 60'	16"						
<b>Surface</b>	12 1/4"	0 – 2,300' KB±	9-5/8"	36.0#	J-55	STC	2020 PSI	3520 Psi	394,000#
<b>Production</b>	7-7/8"	Surface – TD	4-1/2"	11.6#	N-80	LTC	6350 PSI	7780 Psi	223,000#

**EIGHT POINT PLAN**

**EAST CHAPITA 110-05**  
**SE/NW, SEC. 5, T9S, R23E, S.L.B.&M.**  
**UINTAH COUNTY, UTAH**

**Note:** 12-1/4" surface hole will be drilled to a total depth of 200'± below the base of the Green River lost circulation zone and cased w/9-5/8" as shown to that depth. Drilled depth may be shallower or deeper than the 2300' shown above depending on the actual depth of the loss zone.

**All casing will be new or inspected.**

**5. Float Equipment:**

**Surface Hole Procedure (0' - 2300'±)**

Guide Shoe

Insert Float Collar (PDC drillable)

Centralizers: 1-5' above shoe, top of jts. #2 and #3 then every 5<sup>th</sup> joint to surface. (15 total)

**Production Hole Procedure (2300'± - TD):**

Float shoe, 1 joint casing, float collar and balance of casing to surface. 4-1/2", 11.6#, N-80 or equivalent marker collars or short casing joints to be placed at top of Price River and 400' above top of Wasatch. Centralizers to be placed 5' above shoe on joint #1, top of joint #2, and every 2nd joint to 400' above Wasatch Island top. Thread lock float shoe, top and bottom of float collar, and top of 2<sup>nd</sup> joint.

**6. MUD PROGRAM**

**Surface Hole Procedure (Surface - 2300'±):**

Air/air mist or aerated water.

**Production Hole Procedure (2300'± - TD):** Anticipated mud weight 9.5 – 10.5 ppg depending on actual wellbore conditions encountered while drilling.

**2300'± - TD** A closed mud system will be utilized. A bentonite gelled water mud system will be used to control viscosity w/PHPA polymer used for supplemental viscosity and clay encapsulation/inhibition. Water loss will be maintained at <15cc's using white starch or PAC. Bactericides will be used as needed. Anticipated pH will range from 9.0-10.0. Mud weight will be adjusted as necessary for well control. Deflocculants/thinners will be used as necessary to maintain mud quality. LCM sweeps will be utilized as necessary to control lost circulation and mud loss. CO2 contamination, if encountered, will be treated with lime and gypsum.

**EIGHT POINT PLAN**

**EAST CHAPITA 110-05**  
**SE/NW, SEC. 5, T9S, R23E, S.L.B.&M.**  
**UINTAH COUNTY, UTAH**

**7. VARIANCE REQUESTS:**

**Reference:** Onshore Oil and Gas Order No. 1  
Onshore Oil and Gas Order No. 2 – Section E: Special Drilling Operations

- EOG Resources, Inc. requests a variance to regulations requiring a straight run blooie line to be 100' in length. (Where possible, a straight run blooie line will be used).
- EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. To reduce location excavation, the blooie line will be approximately 75' in length.
- EOG Resources, Inc. requests a variance to regulations, requiring during air drilling operations only, requiring dedusting equipment. Dust during air drilling operations is controlled by waster mist.
- EOG Resources, Inc. requests a variance to regulations, during air drilling operations only, requiring an automatic igniter or continuous pilot light on the blooie line. (Not required on aerated water system).
- EOG Resources, Inc. requests a variance that compressors are located in the opposite direction from the blooie line a minimum of 100 feet from the well bore. (Air Compressors are rig mounted).

**8. EVALUATION PROGRAM:**

**Logs:** Mud log from base of surface casing to TD.  
**Cased-hole Logs:** Cased-hole logs will be run in lieu of open-hole logs consisting of the following:  
**Cement Bond / Casing Collar Locator and Pulsed Neutron**

**9. CEMENT PROGRAM:**

**Surface Hole Procedure (Surface - 2300'±):**

**Lead:** 185 sks Class "G" cement with 16% Gel, 10 #/sx Gilsonite, 3% Salt, 2% CaCl<sub>2</sub>, 3 lb/sx GR3 ¼ #/sx Flocele mixed at 11 ppg, 3.82 ft<sup>3</sup>/sk. yield, 23 gps water.

**Tail:** 207 sks Class "G" cement with 2% CaCl<sub>2</sub>, ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft<sup>3</sup>/sk., 5.2 gps water.

**Top Out:** As necessary with Class "G" cement with 2% CaCl<sub>2</sub>, ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft<sup>3</sup>/sk., 5.2 gps water.

**EIGHT POINT PLAN**

**EAST CHAPITA 110-05**  
**SE/NW, SEC. 5, T9S, R23E, S.L.B.&M.**  
**UINTAH COUNTY, UTAH**

**Note:** Cement volumes will be calculated to bring lead cement to surface and tail cement to 500' above the casing shoe.

**Production Hole Procedure (2300'± - TD)**

**Lead:** 146 sks: Hi-Lift "G" w/12% D20 (Bentonite), 1% D79 (Extender), 5% D44 (Salt), 0.2% D46 (Antifoam), 0.25% D112 (Fluid Loss Additive), 0.25 pps D29 (cello flakes) mixed at 11.0 ppg, 3.91 ft<sup>3</sup>/sk., 24.5 gps water.

**Tail:** 908 sks: 50:50 Poz "G" w/ 2% D20 (Bentonite), 0.1% D46 (Antifoam), 0.075% D13 (Retarder), 0.2% D167 (Fluid Loss Additive), 0.2% D65 (Dispersant), mixed at 14.1 ppg, 1.28 ft<sup>3</sup>/sk., 5.9gps water.

**Note:** The above number of sacks is based on gauge-hole calculation.  
Lead volume to be calculated to bring cement to 200'± above 9-5/8" casing shoe.  
Tail volume to be calculated to bring cement to 400'± above top of Wasatch.

**Final Cement volumes will be based upon gauge-hole plus 45% excess.**

**10. ABNORMAL CONDITIONS:**

**Surface Hole (Surface - 2300'±):**

Lost circulation

**Production Hole (2300'± - TD):**

Sloughing shales, lost circulation and key seat development are possible in the Wasatch Formation.

**11. STANDARD REQUIRED EQUIPMENT:**

- A. Choke Manifold
- B. Upper and Lower Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

**EIGHT POINT PLAN**

**EAST CHAPITA 110-05**  
**SE/NW, SEC. 5, T9S, R23E, S.L.B.&M.**  
**UINTAH COUNTY, UTAH**


**12. HAZARDOUS CHEMICALS:**

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

**13. Air Drilling Operations:**


1. Main Air Compressors are 1250 CFM 350 psi with 2000 psi Boosters and are rig mounted.
2. Secondary Air Compressors are 1170 CFM 350 psi with 2000 psi Boosters and are rig mounted.
3. Minimum setting depth of conductor casing will be 60' GL or 10'± into competent formation, whichever is deeper, as determined by the EOG person in charge. Exceptions must be approved by an EOG drilling superintendent or manager.
4. The diameter of the diverter flow line will be a minimum of 10" to help reduce back pressure on the well bore during uncontrolled flow.
5. Rat and Mouse hole drilling will occur only after surface casing has been set and cemented.
6. EOG Resources, Inc. will use a properly maintained and lubricated stripper head.

**EOG RESOURCES 11" 5,000 PSI W.P. BOP  
CONFIGURATION**

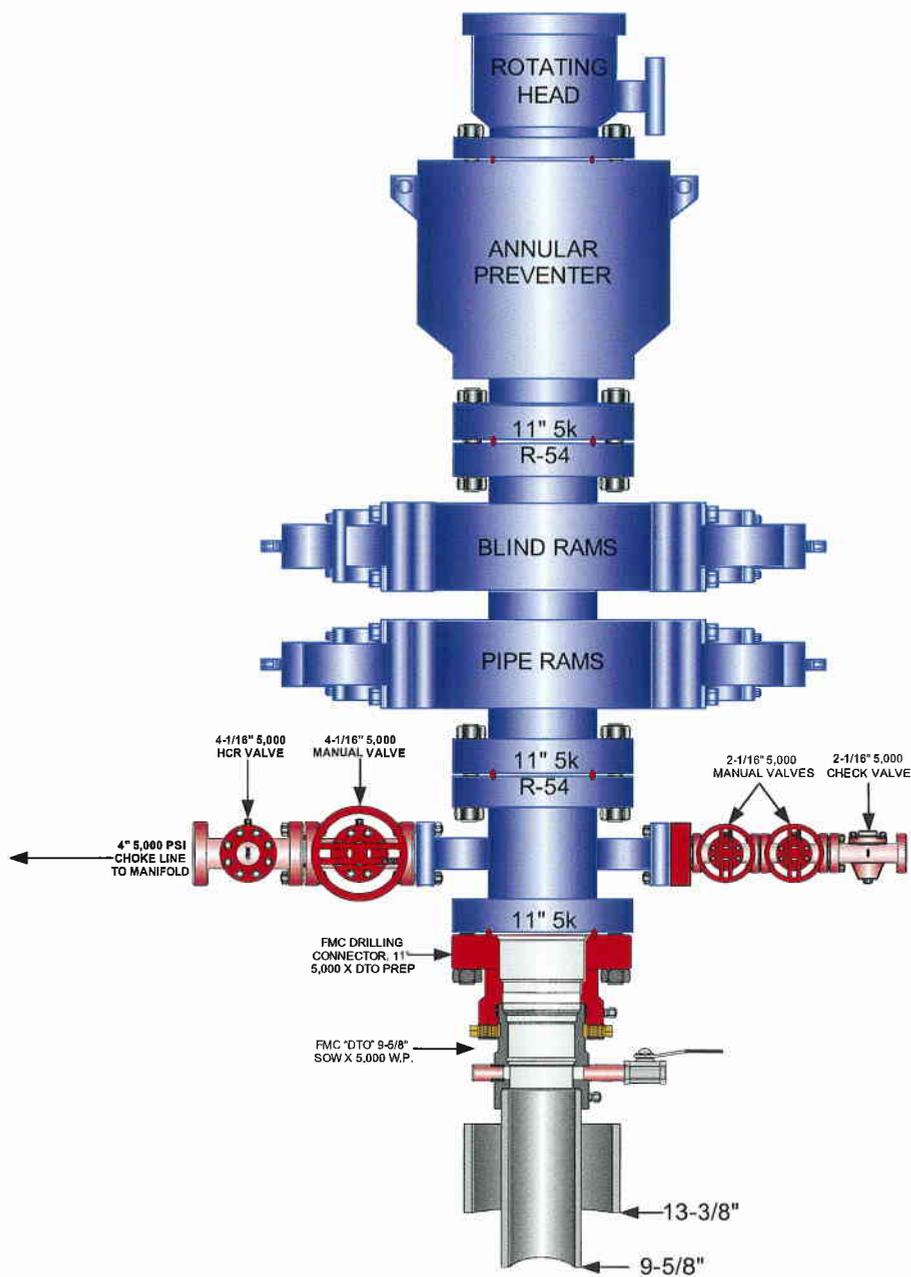

EOG RESOURCES CHOKE MANIFOLD CONFIGURATION  
W/ 5,000 PSI WP VALVES

PAGE 2 OF 2

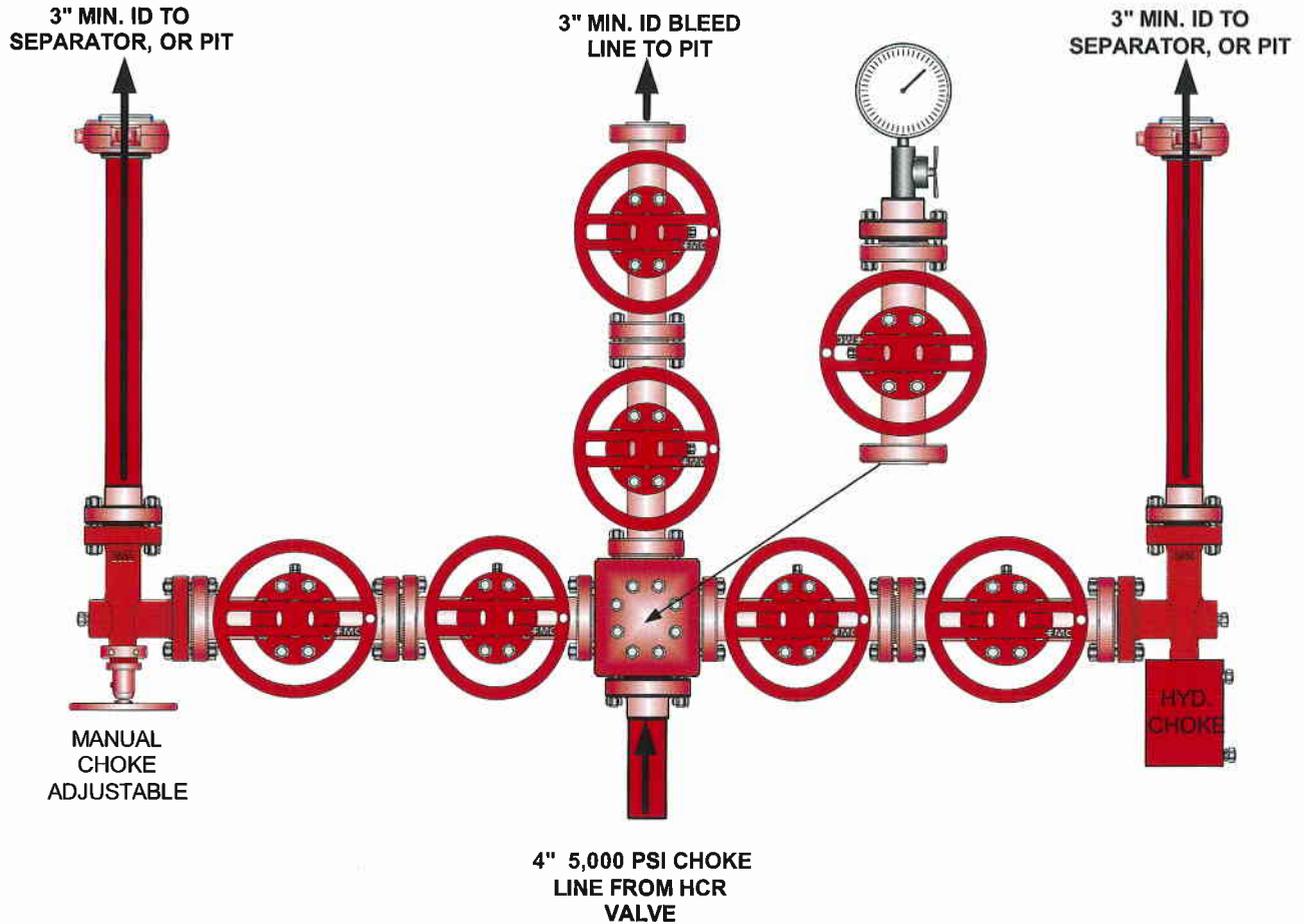

Testing Procedure:

1. BOP will be tested with a professional tester to conform to Onshore Order #2.
2. Blind and Pipe rams will be tested to rated working pressure, 5,000 psi.
3. Annular Preventer will be tested to 50% working pressure, 2,500 psi.  
Casing will be tested to 0.22 psi / ft. or 1,500 psi. Not to exceed 70% of burst strength, whichever is greater.
4. All lines subject to well pressure will be tested to the same pressure as blind and pipe rams.
5. All BOPE specifications and configurations will meet Onshore Order #2 requirements.



***East Chapita 110-05  
SENW, Section 5, T9S, R23E  
Uintah County, Utah***

***SURFACE USE PLAN***

The well pad is approximately 375 feet long with a 266-foot width, containing 2.29 acres more or less. The well access road is approximately 50 feet long with a 30-foot right-of-way, disturbing approximately 0.03 acre. New surface disturbance associated with the well pad and access road is estimated to be 2.32 acres. The pipeline is approximately 31 feet long with a 40-foot temporary right-of-way and an 8-foot permanent right-of-way disturbing approximately 0.06 acre.

***1. EXISTING ROADS:***

- A. See attached Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 44 miles south of Vernal, Utah – See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary.

***2. PLANNED ACCESS ROAD:***

- A. The access road will be approximately 50' in length; culverts will be installed on an as-needed basis. See attached Topo B.
- B. The access road has a 30-foot ROW w/18 foot running surface.
- C. Maximum grade of the new access road will be 8 percent.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.

- I. A 30-foot permanent right-of-way is requested. No surfacing material will be used.
- J. No additional storage areas will be needed for storing equipment, stockpiling, or vehicle parking.

All travel will be confined to existing access road rights-of-way.

New or reconstructed roads will be centerlined – flagged at time of location staking. Access roads and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development, Fourth Edition and/or BLM Manual Section 9113 concerning road construction standards on projects subject to federal jurisdiction.

The road shall be constructed/upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Construction/upgrading shall include ditching, draining, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed, safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30-foot right-of-way will not be allowed. Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing nor shall the roadbed block the drainages. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, EOG Resources, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

Traveling off the 30-foot right-of-way will not be allowed. The access road and associated drainage structures will be constructed and maintained in accordance with road guidelines contained in the joint BLM/USFS publication: Surface Operating Standards for Oil and Gas Exploration and Development, Fourth Edition, and/or BLM Manual Section 9113 concerning road construction standards on projects subject to federal jurisdiction. During the drilling and production phase of operations, the road surface and shoulders will be kept in a safe and useable condition and drainage ditches and culverts will be kept clear and free flowing.

The entire length of the proposed access road is located within lease and will not require a right-of-way.

**3. LOCATION OF EXISTING WELLS WITHIN A ONE-MILE RADIUS:**

See attached TOPO map “C” for the location of wells within a one-mile radius.

**4. LOCATION OF EXISTING AND/OR PROPOSED PRODUCTION FACILITIES:**

**A. On Well Pad**

1. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of wellhead valves, combo separator-dehy unit with meter, two (2) 400-bbl vertical tanks and associated pipe.
2. Gas gathering lines – A 4” gathering line will be buried from the dehy unit to the edge of the location.

**B. Off Well Pad**

1. Proposed pipeline will transport natural gas.
2. The pipeline will be a permanent feeder line.
3. The length of the proposed pipeline right-of-way is 31’ x 8’. The proposed pipeline leaves the eastern edge of the well pad (Lease UTU01304) proceeding in an easterly direction for an approximate distance of 31’ tying into an existing pipeline in the SENW of Section 5, T9S, R23E (Lease UTU01304). Pipe will be 4” NOM, 0.156 wall, Grade X42, Zap-Lock, electric weld with a 35 mil X-Tru coating.

The existing pipeline north of the proposed well pad will be re-located to the north of the well pad for an approximate distance of 640’.

4. Proposed pipeline will be a 4” OD steel, zap-lok line laid on the surface
5. Proposed pipeline will be laid on surface.
6. A 8-foot permanent pipeline right-of-way is requested. A 40-foot temporary pipeline right-of-way for construction purposes is requested, the temporary right-of-way will be utilized for a 10-day period.
7. The proposed pipeline route begins in the SENW of Section 5, Township 9S, Range 23E, proceeding easterly for an approximate distance of 31’ to the NWSW of Section 5, Township 9S, Range 23E.
8. Pipeline will be coupled using the Zap lock method. No additional off-pad facilities will be required.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within 6 months of installation. **All facilities will be painted with Carlsbad Canyon.** Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

**5. LOCATION AND TYPE OF WATER SUPPLY:**

- A. Water supply will be Bonanza Power Plant water source in Sec 26, T8S, R23E, Uintah County, UT (State Water Right # 49-225(A31368)).
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

**6. SOURCE OF CONSTRUCTION MATERIALS:**

- A. All construction material for this pipeline will be of native borrow and soil accumulated during the construction of the location.
- B. No mineral materials will be required.

**7. METHODS OF HANDLING WASTE DISPOSAL:**

**A. METHODS AND LOCATION**

- 1. Cuttings will be confined in the reserve pit.
  - 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
  - 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah County Landfill.
  - 4. Produced wastewater will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. After the 90 day period, the produced water will be contained in a tank on location and then disposed of at one of the following locations: Natural Buttes Unit 21-20B SWD, Ace Disposal, CWU 550-30N SWD, CWU 2-29 SWD, Red Wash Evaporation ponds 1, 2, 3, 4, 5 or 6, Coyote Evaporation Ponds 1, 2, 3, or 4, Coyote Evaporation Ponds 1 or 2, or EOG Resources, Inc. drilling operations (Chapita Wells Unit, Natural Buttes Unit & Stagecoach Unit).
  - 5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.
- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit, through natural or artificial methods, or removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

The reserve pit will be constructed so as not to leak, break, or allow discharge. If the reserve pit requires padding prior to lining (due to rocky conditions) felt padding will be used.

The reserve pit shall be lined with felt, and a 16-millimeter plastic liner. Sufficient bedding (i.e. weed free straw, or hay; felt; polyswell or soil) will be used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash, scrap pipe, etc., that could puncture the liner will be disposed of in the pit. More stringent protective requirements may be deemed necessary by the Authorized Officer (A.O.)

EOG Resources, Inc. maintains a file, per 29 CFR 1910.1200 (g) containing current Material Safety Data Sheets (MSDS) for all chemicals, compounds, and/or substances which are used during the course of construction, drilling, completion, and production operations for this project. Hazardous materials (substances) which may be found at the site may include drilling mud and cementing products which are primarily inhalation hazards, fuels (flammable and/or combustible), materials that may be necessary for well completion/ stimulation activities such as flammable or combustible substances and acids/gels (corrosives). The opportunity for Superfund Amendments and Reauthorization Act (SARA) listed Extremely Hazardous Substances (EHS) at the site is generally limited to proprietary treating chemicals. All hazardous and EHS and commercial preparations will be handled in an appropriate manner to minimize the potential for leaks or spills to the environment.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completion of the well. Furthermore, extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will not be used, produced, stored, transported, or disposed of in association with the drilling, testing or completion of the well.

**8. ANCILLARY FACILITIES:**

None anticipated.

**9. WELL SITE LAYOUT:**

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The reserve pit will be located on the northwest corner of the location. The flare pit will be located downwind of the prevailing wind direction on the north side of the location, a minimum of 100 feet from the wellhead and 30 feet from the reserve pit fence.

The stockpiled pit topsoil (first six inches) will be stored separate from the location topsoil north of corner #5. The stockpiled location topsoil will be stored in a location providing easy access for interim reclamation and protection of the topsoil. Upon completion of construction,

the stockpiled topsoil from the location will be broadcast seeded with the approved seed mixture from this location and then walked down with a Caterpillar tractor.

Access to the well pad will be from the east.

**FENCING REQUIREMENTS:**

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.)
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distances between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BLM or SMA specifications. Prior to crossing any fence located on Federal land, or any fence between Federal land and private land, the operator will contact the BLM, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

**10. PLANS FOR RECLAMATION OF THE SURFACE:**

**A. Interim Reclamation (Producing Location)**

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be reseeded during interim reclamation. The reserve pit will be reclaimed within 6 months from the date of the well completion, or as soon as weather allows. Before any dirt takes place, the reserve pit must be completely dry and free of all foreign obstacles.

The stockpiled pit topsoil will then be spread over the pit area and broadcast seeded with the prescribed seed mixture for this location. The seeded area will then be walked down with a cat.

<b>Seed Mixture</b>	<b>Drilled Rate (lbs./acre PLS*)</b>
HyCrest Wheatgrass	5.0
Shadscale	4.0
Prostrate Kochia	3.0

\*Pure live seed (PLS) formula: percent of purity of seed mixture times percent germination of seed mixture equals portion of seed mixture that is PLS.

***B. Dry Hole/Abandoned Location***

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BLM will attach the appropriate surface rehabilitation conditions of approval.

<b>Seed Mixture</b>	<b>Drilled Rate (lbs./acre PLS*)</b>
Wyoming Big Sage	1.0
Shadscale	4.0
Needle and Threadgrass	4.0
HyCrest Wheatgrass	2.0
Scarlet Globe Mallow	1.0

\*Pure live seed (PLS) formula: percent of purity of seed mixture times percent germination of seed mixture equals portion of seed mixture that is PLS.

**11. SURFACE OWNERSHIP:**

Surface ownership of the proposed well site, access road, and pipeline route is as follows:

**Bureau of Land Management**

**12. OTHER INFORMATION:**

A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the Authorized Officer. Within five working days the Authorized Officer will inform the operator as to:

- Whether the materials appear eligible for the National Register of Historic Places;
- The mitigation measures the operator will likely have to undertake before the site can be used.
- A time frame for the Authorized Officer to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the Authorized Officer are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the Authorized Officer will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The Authorized Officer will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the Authorized Officer that required mitigation has been completed, the operator will then be allowed to resume construction.

- B. As operator, EOG Resources, Inc. will control noxious weeds along rights-of-way for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BLM administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application or herbicides or other pesticides or possible hazardous chemicals.
- C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on BLM lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

- D. The drilling rig and ancillary equipment will be removed from the location prior to commencement of completion operations. Completion operations will be conducted utilizing a completion/workover rig.

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice of Lessees. The operator is fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Construction activity will not be conducted using frozen or saturated soils material or during periods when watershed damage is likely to occur.

If the existing access road, proposed access road, and proposed pad are dry during construction, drilling, and completion activities, water will be applied to help facilitate compaction during construction and to minimize soil loss as a result of wind erosion.

A block cultural resources survey was conducted and will be submitted by Montgomery Archaeological Consultants. A paleontological survey was conducted and will be submitted by Intermountain Paleo.

**Additional Surface Stipulations:**

None.

***LESSEE OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:***

**PERMITTING AGENT**

Kaylene Gardner  
EOG Resources, Inc.  
1060 East Highway 40  
Vernal, UT 84078  
(435) 781-9111

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved plan of operations, and any applicable Notice to Lessees. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

The operator or his/her contractor shall contact the BLM office at (435) 781-4400 forty-eight (48) hours prior to construction activities.

**CERTIFICATION:**

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by EOG Resources, Inc. and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

Please be advised that EOG Resources, Inc. is considered to be the operator of the East Chapita 110-05 Well, located in the SENW, of Section 5, T9S, R23E, Uintah County, Utah; Federal land and minerals; and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond Coverage is under Bond # NM 2308.

January 22, 2008  
Date

  
\_\_\_\_\_  
Kaylene R. Gardner, Regulatory Administrator

**EOG RESOURCES, INC.**  
**EAST CHAPITA #110-5**  
 LOCATED IN UTAH COUNTY, UTAH  
 SECTION 5, T9S, R23E, S.L.B.&M.



PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: SOUTHWESTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: WESTERLY



**UELS** Uintah Engineering & Land Surveying  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813

**LOCATION PHOTOS**

<b>11</b>	<b>12</b>	<b>08</b>
MONTH	DAY	YEAR

PHOTO

TAKEN BY: J.M.

DRAWN BY: J.H.


REVISED: 00-00-00

- Since 1964 -


EOG RESOURCES, INC.

FIGURE #1

LOCATION LAYOUT FOR  
 EAST CHAPITA #110-5  
 SECTION 5, T9S, R23E, S.L.B.&M.  
 2517' FNL 1322' FWL

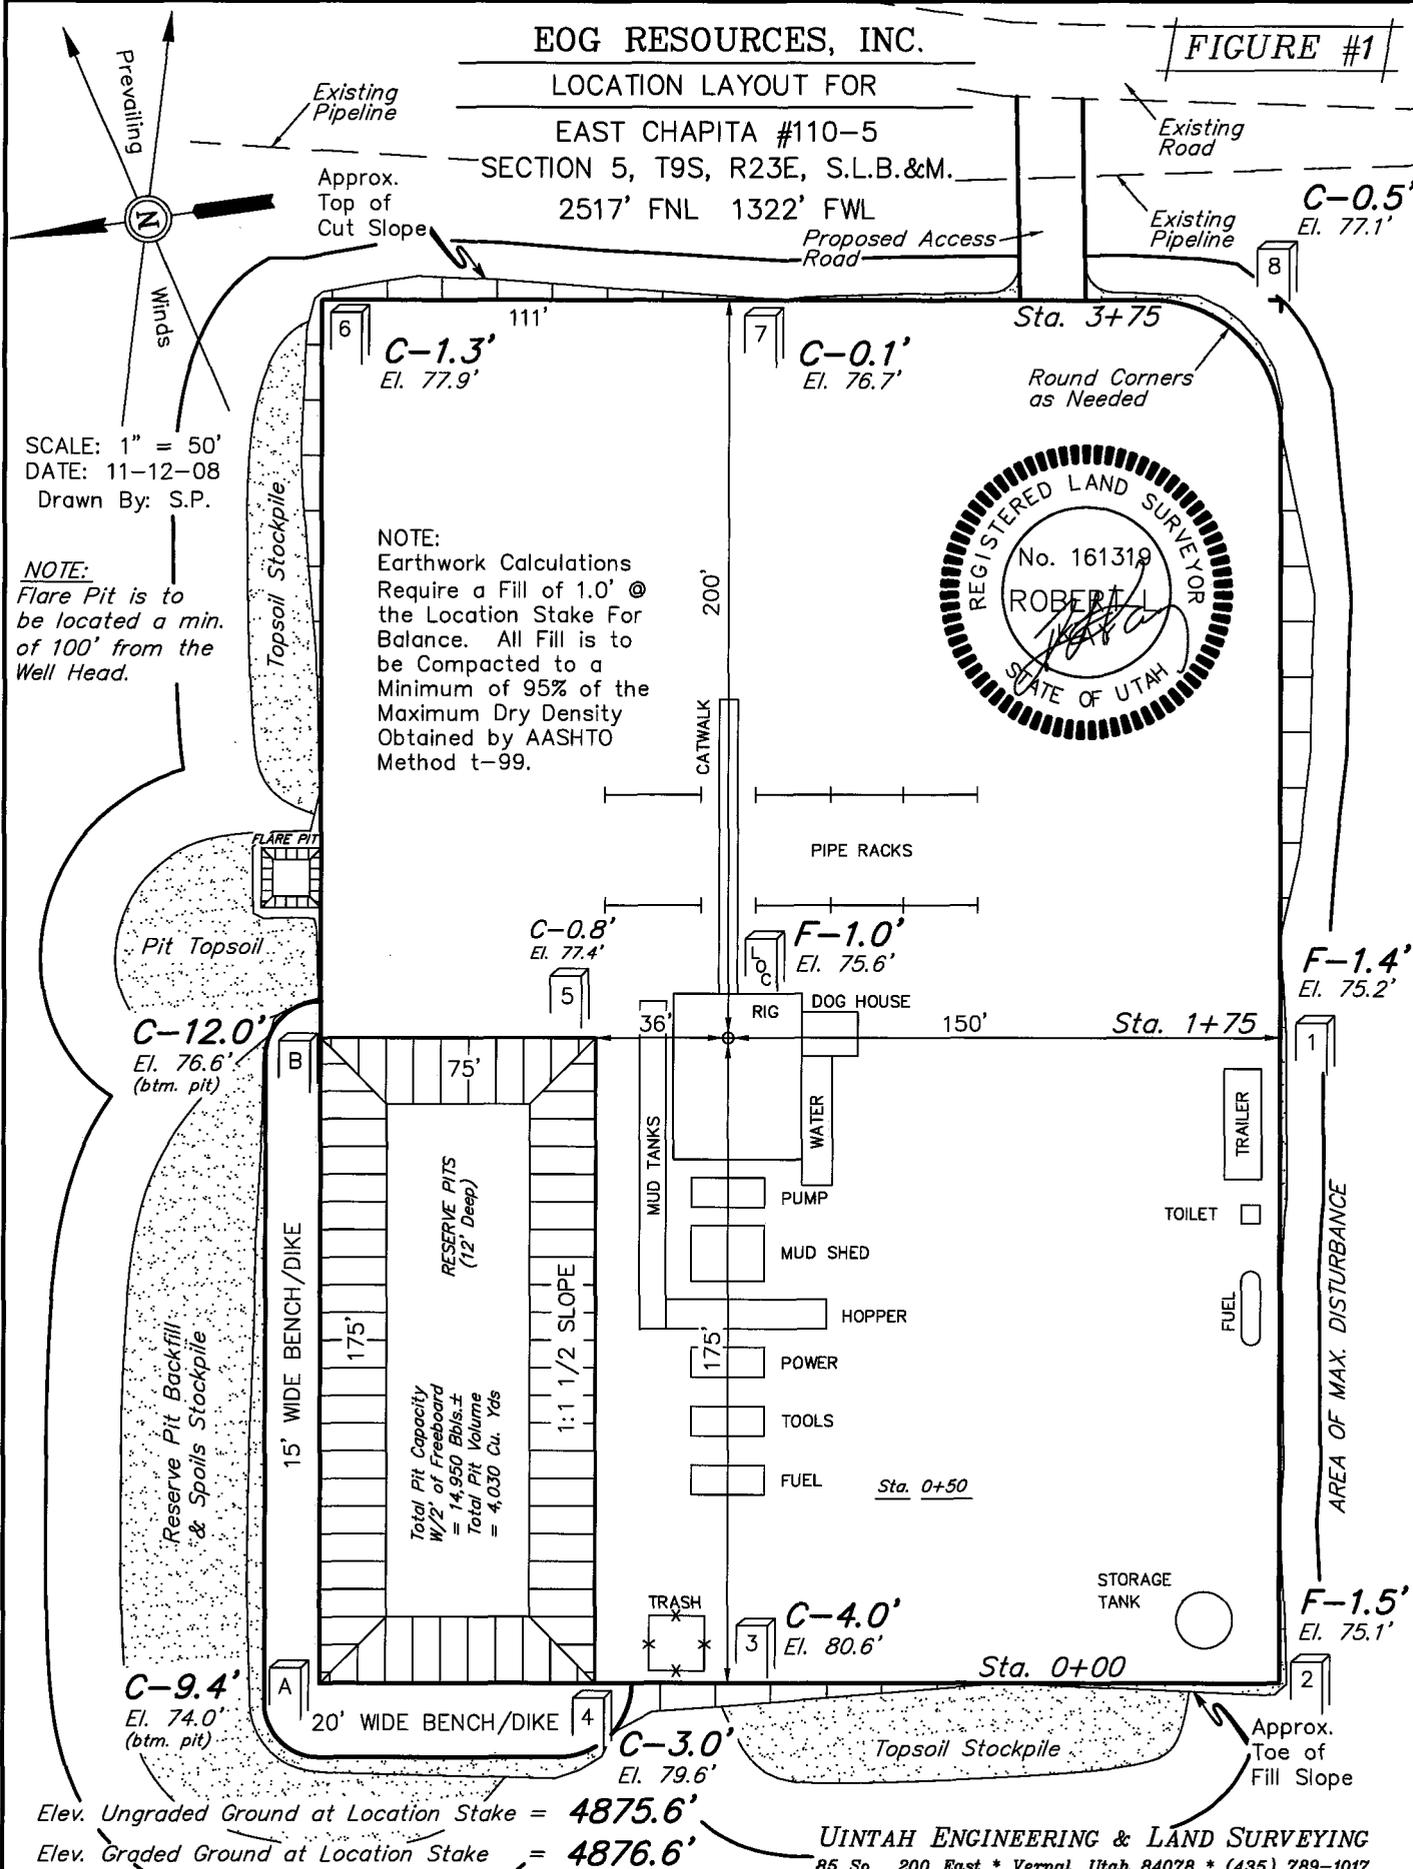

NOTE:  
 Earthwork Calculations  
 Require a Fill of 1.0' @  
 the Location Stake For  
 Balance. All Fill is to  
 be Compacted to a  
 Minimum of 95% of the  
 Maximum Dry Density  
 Obtained by AASHTO  
 Method t-99.



SCALE: 1" = 50'  
 DATE: 11-12-08  
 Drawn By: S.P.

NOTE:  
 Flare Pit is to  
 be located a min.  
 of 100' from the  
 Well Head.

Elev. Ungraded Ground at Location Stake = 4875.6'  
 Elev. Graded Ground at Location Stake = 4876.6'

UINTAH ENGINEERING & LAND SURVEYING  
 85 So. 200 East \* Vernal, Utah 84078 \* (435) 789-1017



**EOG RESOURCES, INC.**

**TYPICAL CROSS SECTIONS FOR**

**EAST CHAPITA #110-5  
SECTION 5, T9S, R23E, S.L.B.&M.  
2517' FNL 1322' FWL**

**FIGURE #2**

1" = 20'  
X-Section  
Scale  
1" = 50'  
DATE: 11-12-08  
Drawn By: S.P.

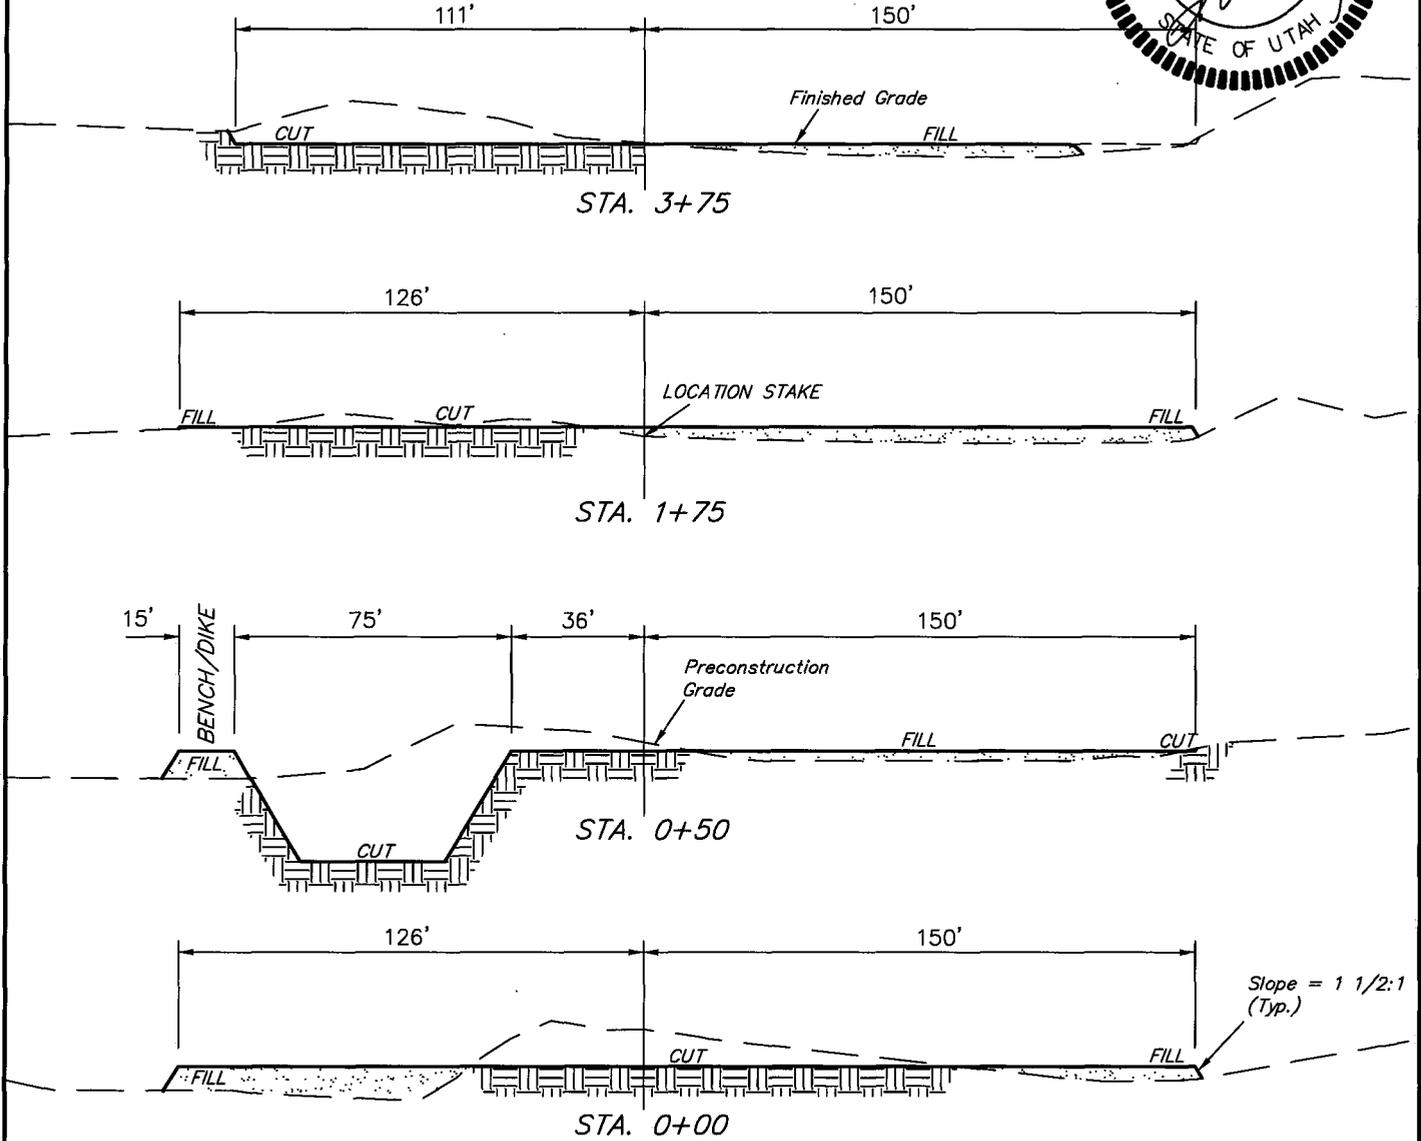

APPROXIMATE ACREAGES

WELL SITE DISTURBANCE = ± 3.304 ACRES  
ACCESS ROAD DISTURBANCE = ± 0.032 ACRES  
PIPELINE DISTURBANCE = ± 0.022 ACRES  
TOTAL = ± 3.358 ACRES

\* NOTE:  
FILL QUANTITY INCLUDES  
5% FOR COMPACTION

APPROXIMATE YARDAGES

(6") Topsoil Stripping = 2,060 Cu. Yds.  
Remaining Location = 5,960 Cu. Yds.  
  
TOTAL CUT = 8,020 CU.YDS.  
FILL = 3,940 CU.YDS.

EXCESS MATERIAL = 4,080 Cu. Yds.  
Topsoil & Pit Backfill (1/2 Pit Vol.) = 4,080 Cu. Yds.  
EXCESS UNBALANCE = 0 Cu. Yds.  
(After Interim Rehabilitation)

**UINTAH ENGINEERING & LAND SURVEYING**  
85 So. 200 East \* Vernal, Utah 84078 \* (435) 789-1017

EOG RESOURCES, INC.

FIGURE #3



PRODUCTION FACILITY LAYOUT FOR

EAST CHAPITA #110-5  
SECTION 5, T9S, R23E, S.L.B.&M.  
2517' FNL 1322' FWL



SCALE: 1" = 50'  
DATE: 11-12-08  
Drawn By: S.P.

Access Road

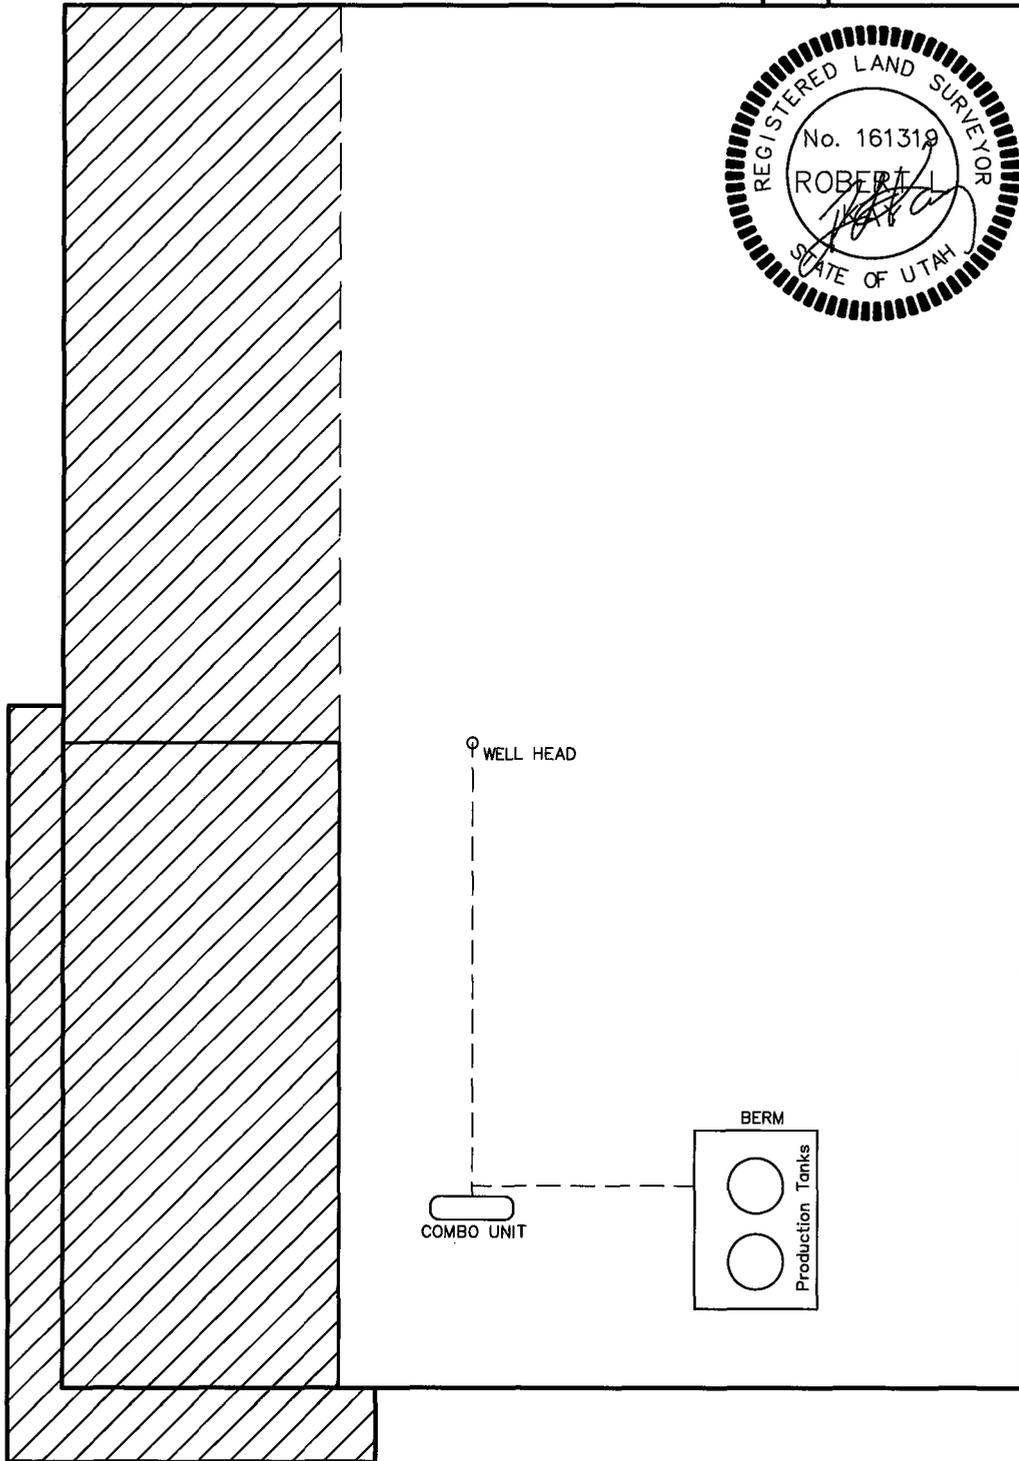


 RE-HABED AREA

EOG RESOURCES, INC.  
EAST CHAPITA #110-5  
SECTION 5, T9S, R23E, S.L.B.&M.

PROCEED IN AN EASTERLY, THEN SOUTHERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 3.9 MILES TO THE JUNCTION OF STATE HIGHWAY 45; EXIT RIGHT AND PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 19.2 MILES ON STATE HIGHWAY 45 TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN RIGHT AND PROCEED IN A SOUTHWESTERLY, THEN SOUTHERLY DIRECTION APPROXIMATELY 13.0 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN LEFT AND PROCEED IN A SOUTHEASTERLY, THEN NORTHEASTERLY DIRECTION APPROXIMATELY 2.4 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO EAST; TURN RIGHT AND PROCEED IN AN EASTERLY, THEN NORTHEASTERLY DIRECTION APPROXIMATELY 0.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN RIGHT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 0.5 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY, THEN EASTERLY DIRECTION APPROXIMATELY 1.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN RIGHT AND PROCEED IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.6 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN RIGHT AND PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 1.0 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY, THEN EASTERLY DIRECTION APPROXIMATELY 0.4 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY, THEN EASTERLY DIRECTION APPROXIMATELY 0.3 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHEAST; TURN RIGHT AND PROCEED IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 0.15 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN RIGHT AND PROCEED IN A SOUTHWESTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 0.2 MILES TO JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN RIGHT AND PROCEED IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 300' TO THE BEGINNING OF THE PROPOSED ACCESS TO THE SOUTHWEST; FOLLOW ROAD FLAGS IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 50' TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 43.85 MILES.

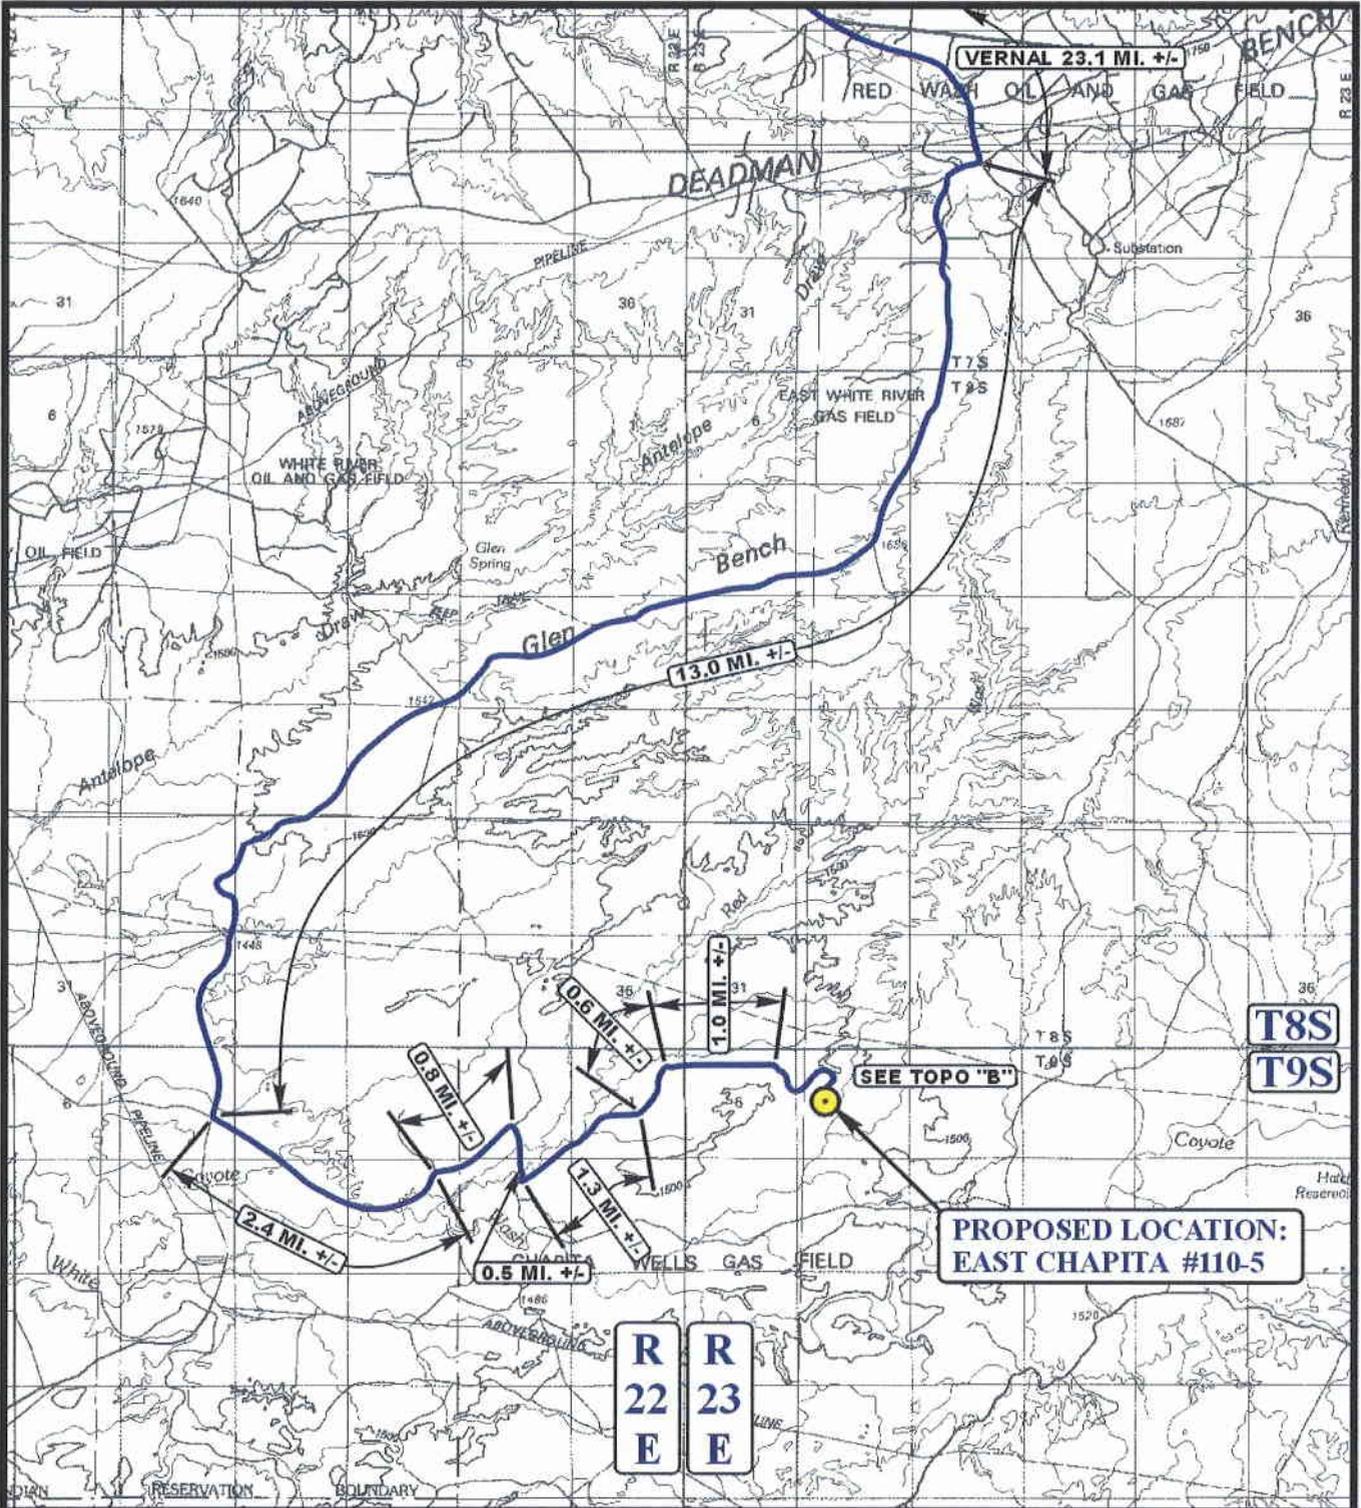

**LEGEND:**

 PROPOSED LOCATION



**EOG RESOURCES, INC.**

**EAST CHAPITA #110-5**  
**SECTION 5, T9S, R23E, S.L.B.&M.**  
**2517' FNL 1322' FWL**




**Uintah Engineering & Land Surveying**  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC**  
**MAP**

**11 12 08**  
 MONTH DAY YEAR



SCALE: 1:100,000 DRAWN BY: J.H. REVISED: 00-00-00

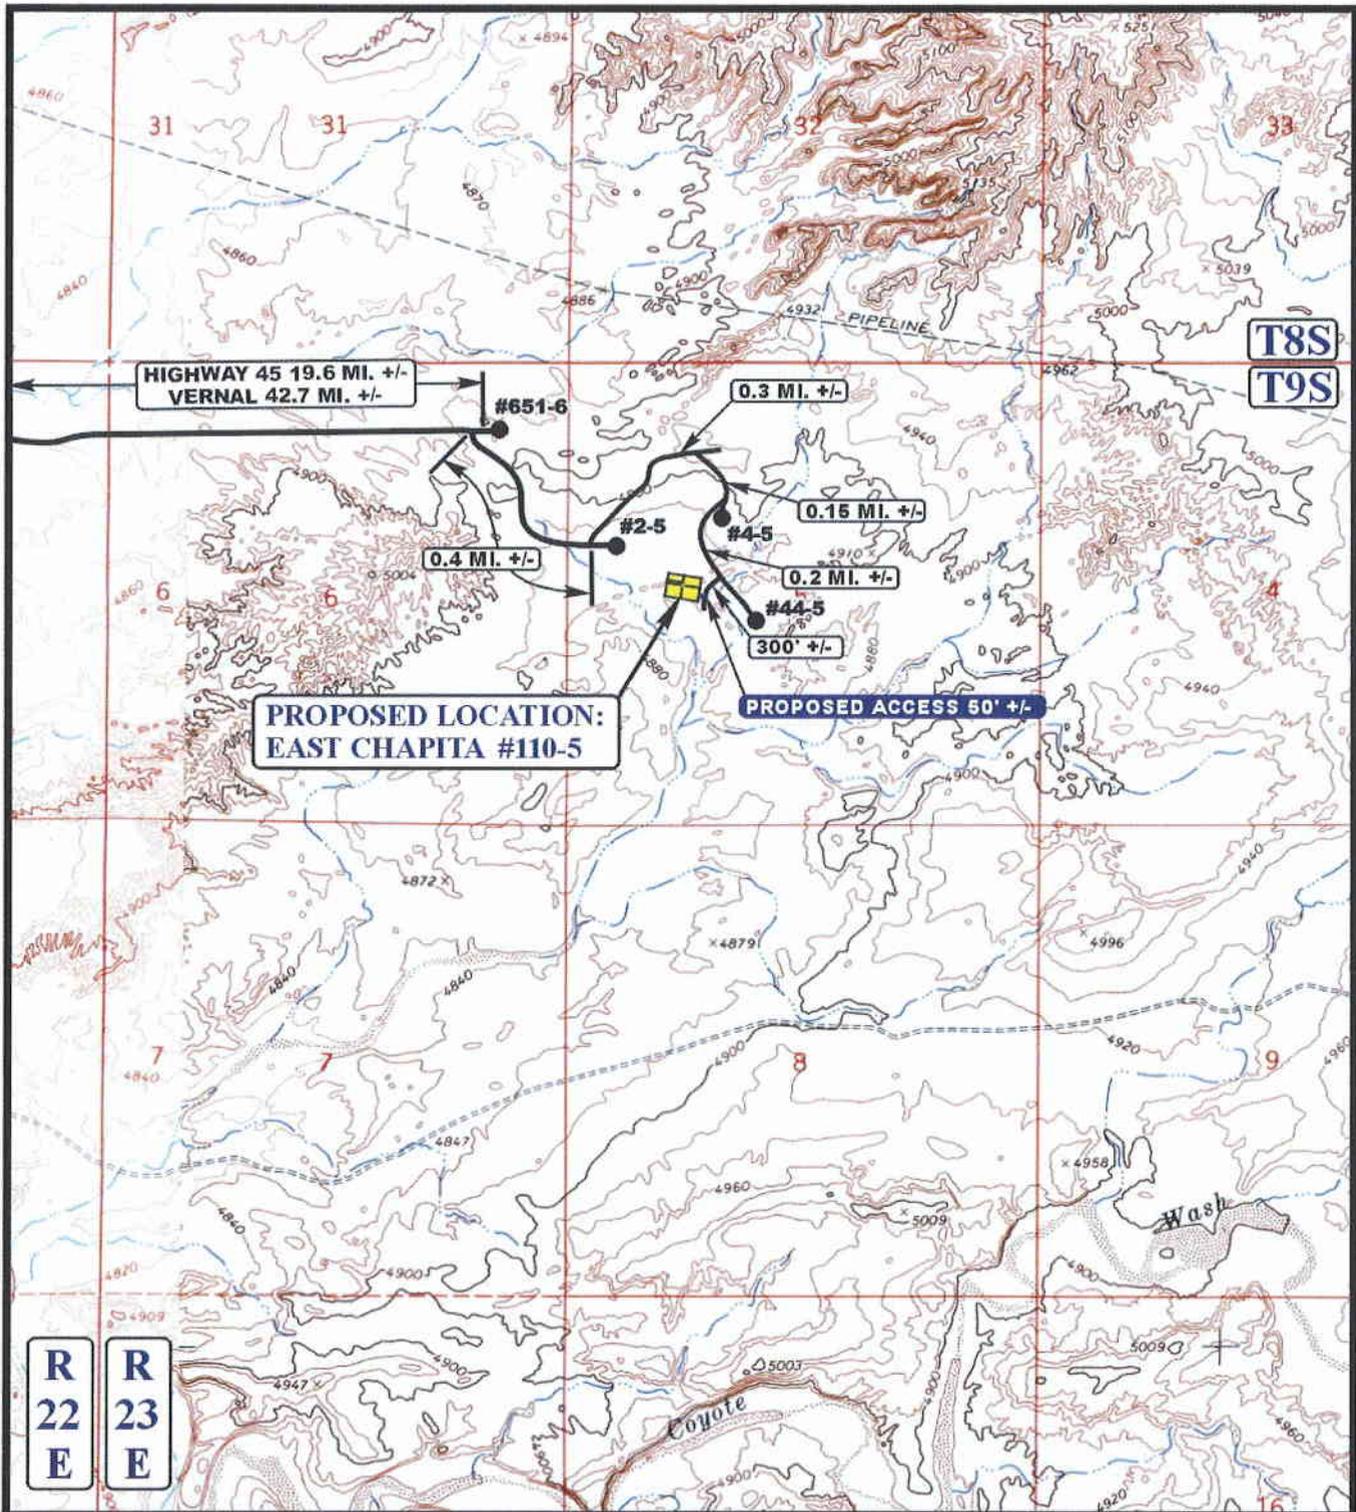

**LEGEND:**

- EXISTING ROAD
- PROPOSED ACCESS ROAD




**EOG RESOURCES, INC.**

**EAST CHAPITA #110-5  
SECTION 5, T9S, R23E, S.L.B.&M.  
2517' FNL 1322' FWL**

**U E S**  
**Uintah Engineering & Land Surveying**  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813

**TOPOGRAPHIC MAP**  
 11 12 08  
 MONTH DAY YEAR  
 SCALE: 1" = 2000' DRAWN BY: J.H. REVISED: 00-00-00

**B**  
**TOPO**

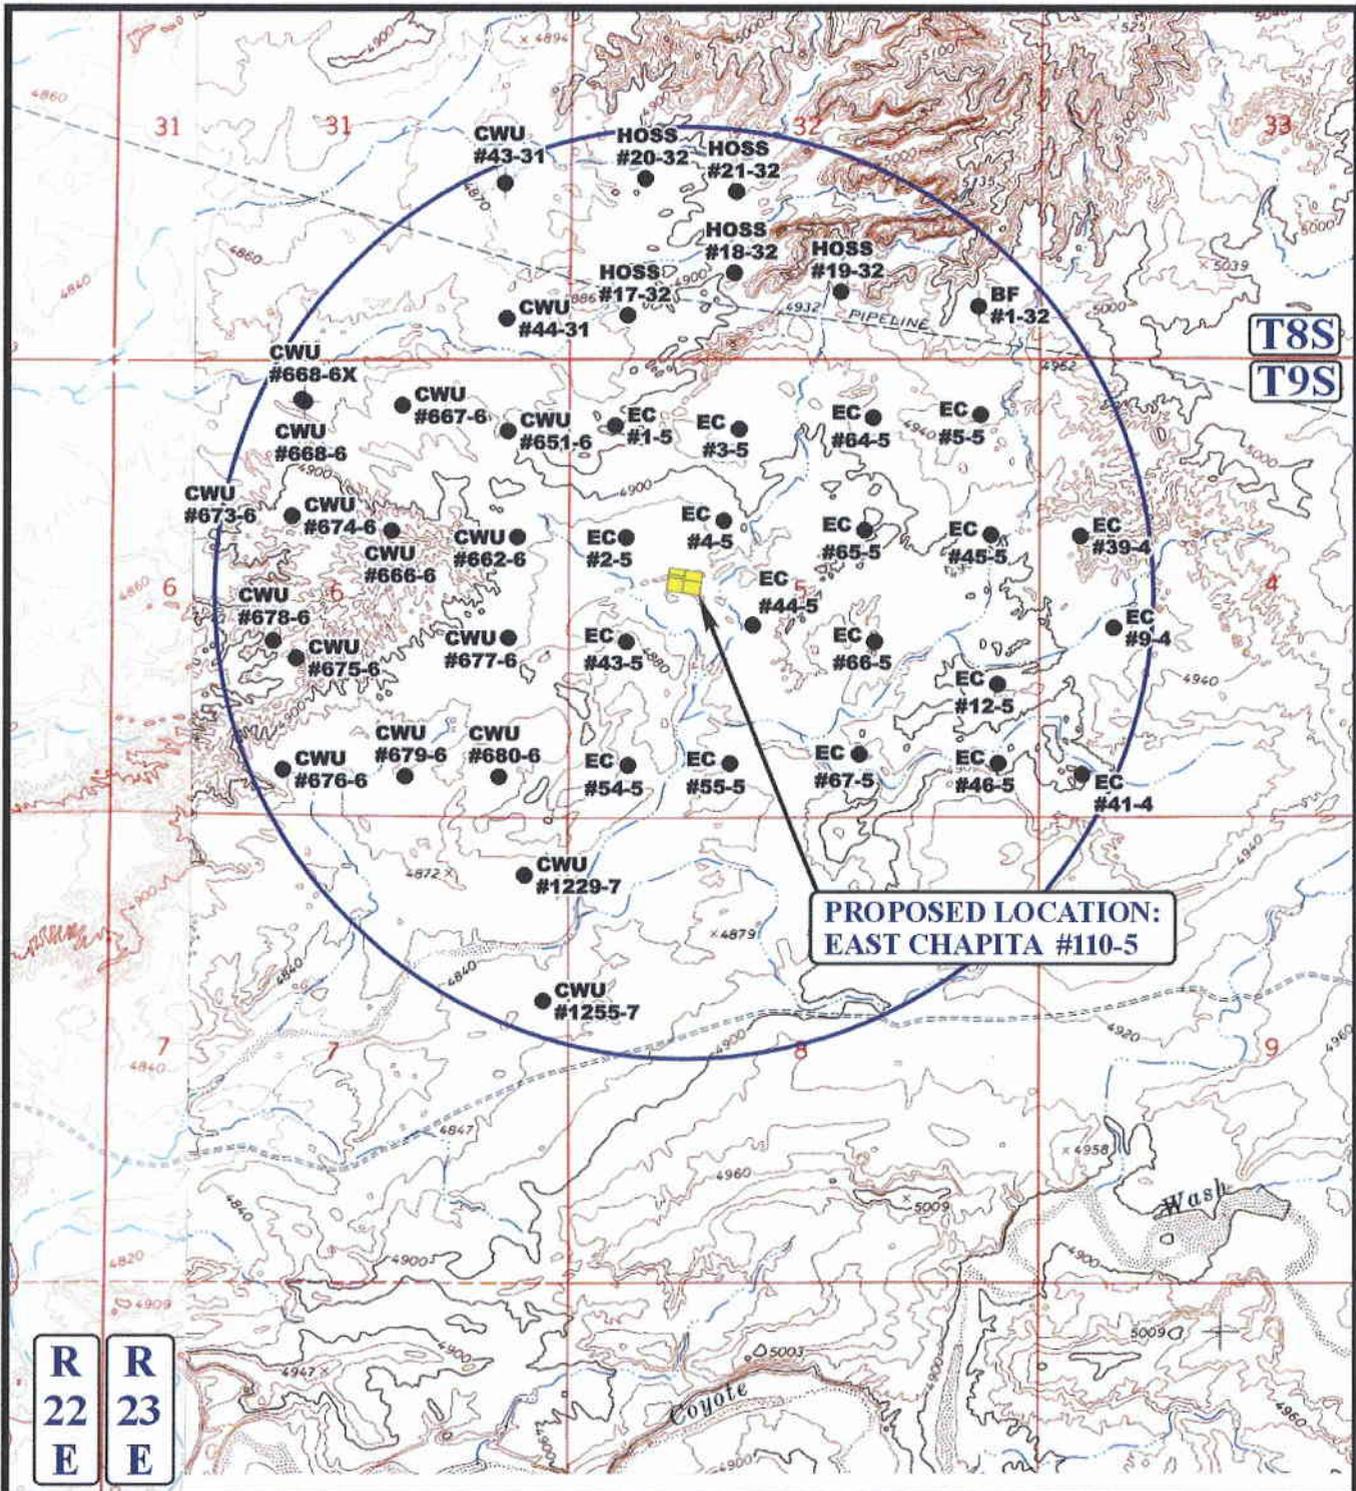

T8S  
T9S

PROPOSED LOCATION:  
EAST CHAPITA #110-5

R 22 E  
R 23 E

**LEGEND:**

- DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED

**EOG RESOURCES, INC.**


**EAST CHAPITA #110-5**  
SECTION 5, T9S, R23E, S.L.B.&M.  
2517' FNL 1322' FWL

**U&L S**  
**Uintah Engineering & Land Surveying**  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813



**TOPOGRAPHIC MAP**  
 11 12 08  
 MONTH DAY YEAR  
 SCALE: 1" = 2000' DRAWN BY: J.H. REVISED: 00-00-00

**C**  
**TOPO**

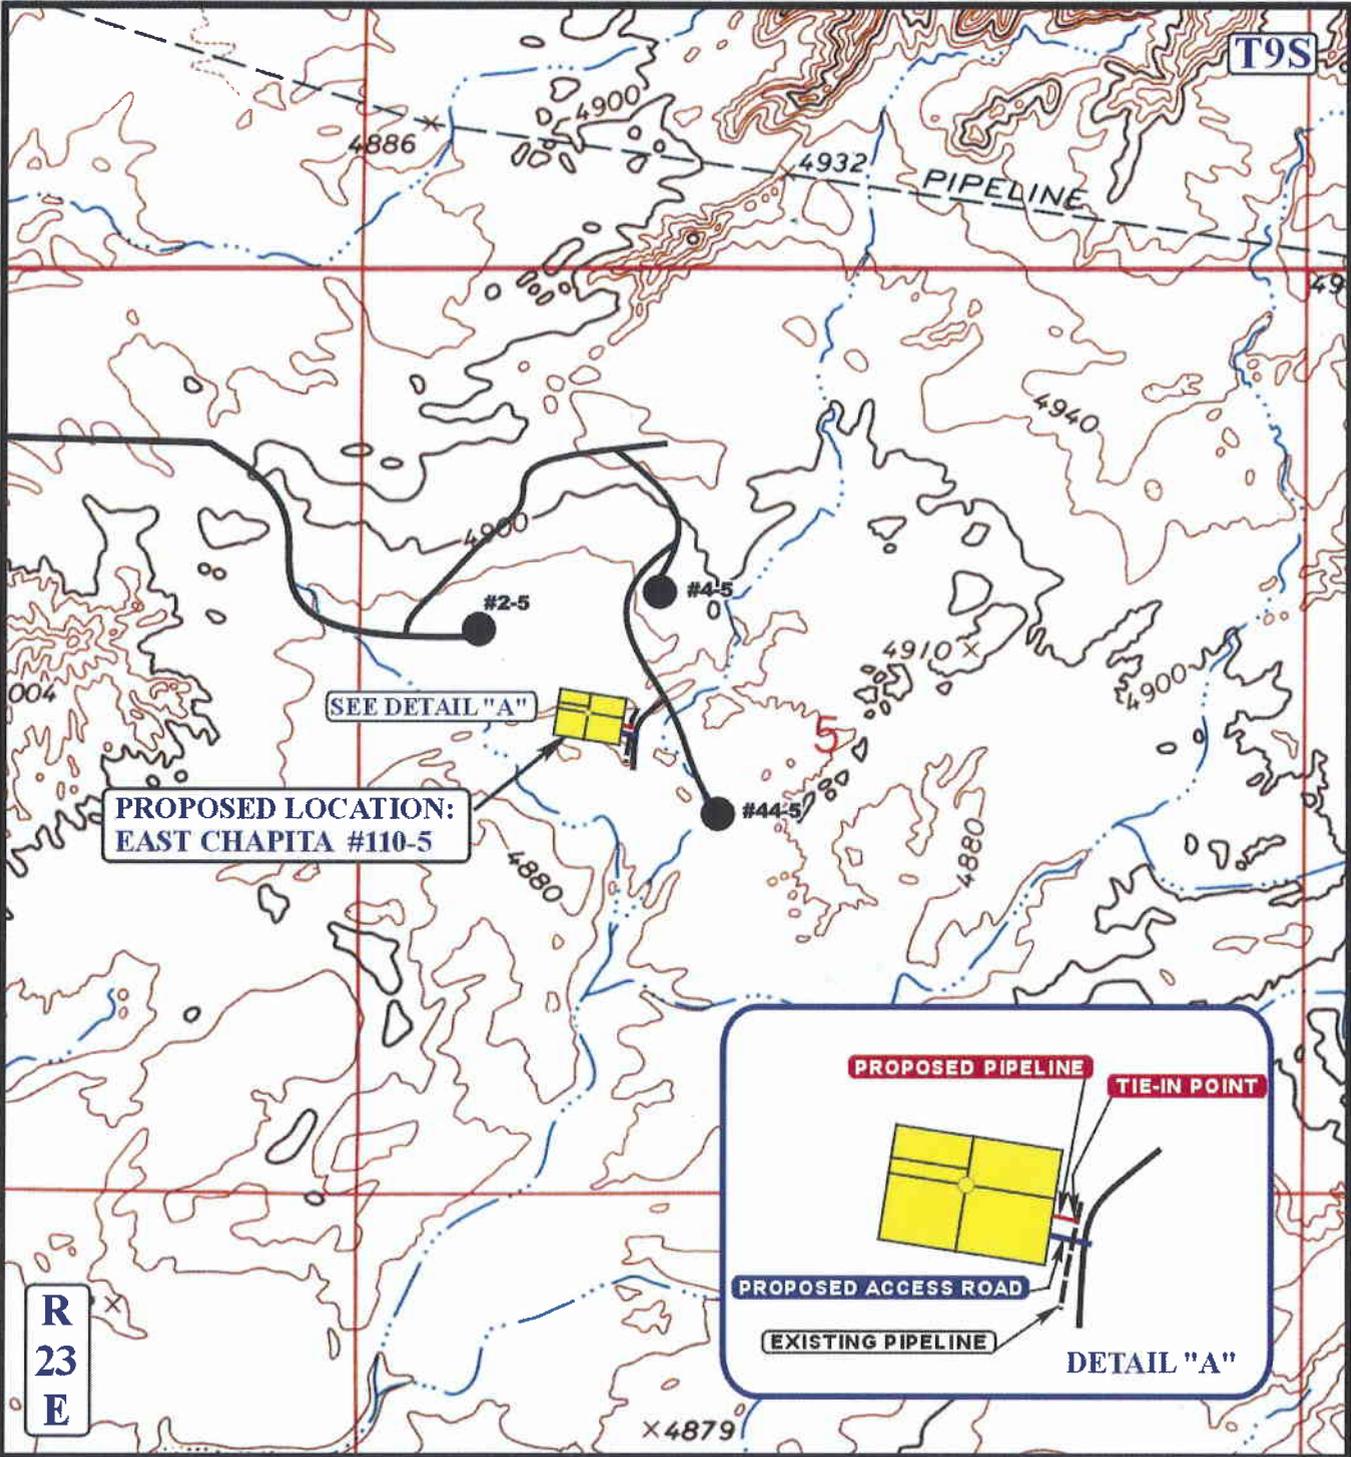

**APPROXIMATE TOTAL PIPELINE DISTANCE = 31' +/-**

**LEGEND:**

-  PROPOSED ACCESS ROAD
-  PROPOSED PIPELINE

**EOG RESOURCES, INC.**

**EAST CHAPITA #110-5  
SECTION 5, T9S, R23E, S.L.B.&M.  
2517' FNL 1322' FWL**

**U E S**  
 Uintah Engineering & Land Surveying  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813



**TOPOGRAPHIC MAP**  
 11 12 08  
 MONTH DAY YEAR  
 SCALE: 1" = 1000' DRAWN BY: J.H. REVISED: 00-00-00

**D**  
 TOPO

**WORKSHEET  
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 01/28/2009

API NO. ASSIGNED: 43-047-40509

WELL NAME: E CHAPITA 110-05  
 OPERATOR: EOG RESOURCES, INC. ( N9550 )  
 CONTACT: KAYLENE GARDNER

PHONE NUMBER: 435-781-9111

PROPOSED LOCATION:

SENW 05 090S 230E  
 SURFACE: 2517 FNL 1322 FWL  
 BOTTOM: 2517 FNL 1322 FWL  
 COUNTY: UINTAH  
 LATITUDE: 40.06509 LONGITUDE: -109.3549  
 UTM SURF EASTINGS: 640299 NORTHINGS: 4436068  
 FIELD NAME: NATURAL BUTTES ( 630 )

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering	DKD	2/07/09
Geology		
Surface		

LEASE TYPE: 1 - Federal  
 LEASE NUMBER: UTU01304  
 SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: WSMVD  
 COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[1] Ind[] Sta[] Fee[]  
(No. NM 2308 )
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit  
(No. 49-225 )
- RDCC Review (Y/N)  
(Date: \_\_\_\_\_ )
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)  
(Wasatch, mesaverde)

LOCATION AND SITING:

- R649-2-3.
- Unit: \_\_\_\_\_
- R649-3-2. General
- Siting: 460' From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
- Board Cause No: 179-15
- Eff Date: 7-17-2008
- Siting: 460' fr. ext. lease boundary
- R649-3-11. Directional Drill

COMMENTS:

STIPULATIONS:

1- Federal Approval  
2- In accordance with Cause No. 179-15, commingling of the Wasatch and Mesaverde formations is allowed.





JON M. HUNTSMAN, JR.  
Governor

GARY R. HERBERT  
Lieutenant Governor

# State of Utah

## DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER  
Executive Director

### Division of Oil, Gas and Mining

JOHN R. BAZA  
Division Director

February 18, 2009

EOG Resources, Inc.  
1060 East Highway 40  
Vernal, UT 84078

Re: East Chapita 110-05 Well, 2517' FNL, 1322' FWL, SE NW, Sec. 5, T. 9 South,  
R. 23 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

Administrative approval for commingling the production from the Wasatch formation and the Mesaverde formation in this well is hereby granted. Appropriate information has been submitted to DOGM in accordance with R649-3-22. No written objections from owners were received by DOGM.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-40509.

Sincerely,

Gil Hunt  
Associate Director

pab  
Enclosures

cc: Uintah County Assessor  
Bureau of Land Management, Vernal Office



Operator: EOG Resources, Inc.  
Well Name & Number East Chapita 110-05  
API Number: 43-047-40509  
Lease: UTU01304

Location: SE NW                      Sec. 5                      T. 9 South                      R. 23 East

### Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division with 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281 office      (801) 733-0983 home

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. In accordance with cause No. 179-15, commingling of the Wasatch and Mesaverde formations is allowed.


<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>  <b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU01304
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7. UNIT or CA AGREEMENT NAME:</b>
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> E CHAPITA 110-05
<b>2. NAME OF OPERATOR:</b> EOG Resources, Inc.	<b>9. API NUMBER:</b> 43047405090000
<b>3. ADDRESS OF OPERATOR:</b> 1060 East Highway 40 , Vernal, UT, 84078	<b>PHONE NUMBER:</b> 435 781-9111 Ext
<b>4. LOCATION OF WELL FOOTAGES AT SURFACE:</b> 2517 FNL 1322 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SENW Section: 05 Township: 09.0S Range: 23.0E Meridian: S	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES  <b>COUNTY:</b> UINTAH  <b>STATE:</b> UTAH

**11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 2/9/2010  <input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:  <input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:  <input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> <b>APD EXTENSION</b> OTHER: _____

**12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.**  
 EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the  
 Utah Division of  
 Oil, Gas and Mining

Date: February 16, 2010  
 By: 

<b>NAME (PLEASE PRINT)</b> Mickenzie Gates	<b>PHONE NUMBER</b> 435 781-9145	<b>TITLE</b> Operations Clerk
<b>SIGNATURE</b> N/A	<b>DATE</b> 2/9/2010	



**The Utah Division of Oil, Gas, and Mining**

- State of Utah  
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

**Request for Permit Extension Validation Well Number 43047405090000**

**API:** 43047405090000

**Well Name:** E CHAPITA 110-05

**Location:** 2517 FNL 1322 FWL QTR SENW SEC 05 TWNP 090S RNG 230E MER S

**Company Permit Issued to:** EOG RESOURCES, INC.

**Date Original Permit Issued:** 2/18/2009

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated?  Yes  No
  
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location?  Yes  No
  
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well?  Yes  No
  
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location?  Yes  No
  
- Has the approved source of water for drilling changed?  Yes  No
  
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation?  Yes  No
  
- Is bonding still in place, which covers this proposed well?  Yes  No

**Approved by the  
Utah Division of  
Oil, Gas and Mining**

**Signature:** Mickenzie Gates

**Date:** 2/9/2010

**Title:** Operations Clerk **Representing:** EOG RESOURCES, INC.

**Date:** February 16, 2010

**By:**

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>  <b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU01304
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7. UNIT or CA AGREEMENT NAME:</b>
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> E CHAPITA 110-05
<b>2. NAME OF OPERATOR:</b> EOG Resources, Inc.	<b>9. API NUMBER:</b> 43047405090000
<b>3. ADDRESS OF OPERATOR:</b> 1060 East Highway 40 , Vernal, UT, 84078	<b>PHONE NUMBER:</b> 435 781-9111 Ext
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 2517 FNL 1322 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SENW Section: 05 Township: 09.0S Range: 23.0E Meridian: S	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES  <b>COUNTY:</b> UINTAH  <b>STATE:</b> UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 2/8/2011	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

**Approved by the  
Utah Division of  
Oil, Gas and Mining**

Date: 02/09/2011  
By: 

<b>NAME (PLEASE PRINT)</b> Michelle Robles	<b>PHONE NUMBER</b> 307 276-4842	<b>TITLE</b> Regulatory Assistant
<b>SIGNATURE</b> N/A	<b>DATE</b> 2/8/2011	



**The Utah Division of Oil, Gas, and Mining**

- State of Utah  
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

**Request for Permit Extension Validation Well Number 43047405090000**

**API:** 43047405090000

**Well Name:** E CHAPITA 110-05

**Location:** 2517 FNL 1322 FWL QTR SENW SEC 05 TWP 090S RNG 230E MER S

**Company Permit Issued to:** EOG RESOURCES, INC.

**Date Original Permit Issued:** 2/18/2009

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated?  Yes  No
  
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location?  Yes  No
  
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well?  Yes  No
  
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location?  Yes  No
  
- Has the approved source of water for drilling changed?  Yes  No
  
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation?  Yes  No
  
- Is bonding still in place, which covers this proposed well?  Yes  No

**Signature:** Michelle Robles

**Date:** 2/8/2011

**Title:** Regulatory Assistant **Representing:** EOG RESOURCES, INC.

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>	
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	
<b>1. TYPE OF WELL</b> Gas Well	<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU01304
<b>2. NAME OF OPERATOR:</b> EOG Resources, Inc.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>
<b>3. ADDRESS OF OPERATOR:</b> 1060 East Highway 40 , Vernal, UT, 84078	<b>7. UNIT or CA AGREEMENT NAME:</b>
<b>PHONE NUMBER:</b> 435 781-9111 Ext	<b>8. WELL NAME and NUMBER:</b> E CHAPITA 110-05
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 2517 FNL 1322 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SENW Section: 05 Township: 09.0S Range: 23.0E Meridian: S	<b>9. API NUMBER:</b> 43047405090000
	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES
	<b>COUNTY:</b> UINTAH
	<b>STATE:</b> UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 1/10/2012	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> <b>APD EXTENSION</b>
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

**Approved by the  
Utah Division of  
Oil, Gas and Mining**

**Date:** January 12, 2012

**By:** 

<b>NAME (PLEASE PRINT)</b> Nanette Lupcho	<b>PHONE NUMBER</b> 435 781-9157	<b>TITLE</b> Regulatory Assistant
<b>SIGNATURE</b> N/A	<b>DATE</b> 1/10/2012	



**The Utah Division of Oil, Gas, and Mining**

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

**Request for Permit Extension Validation Well Number 43047405090000**

API: 43047405090000

Well Name: E CHAPITA 110-05

Location: 2517 FNL 1322 FWL QTR SENW SEC 05 TWP 090S RNG 230E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 2/18/2009

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated?  Yes  No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location?  Yes  No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well?  Yes  No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location?  Yes  No
- Has the approved source of water for drilling changed?  Yes  No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation?  Yes  No
- Is bonding still in place, which covers this proposed well?  Yes  No

Signature: Nanette Lupcho

Date: 1/10/2012

Title: Regulatory Assistant Representing: EOG RESOURCES, INC.

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>  <b>5.LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU01304
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7.UNIT or CA AGREEMENT NAME:</b>
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> E CHAPITA 110-05
<b>2. NAME OF OPERATOR:</b> EOG Resources, Inc.	<b>9. API NUMBER:</b> 43047405090000
<b>3. ADDRESS OF OPERATOR:</b> 600 17th Street, Suite 1000 N , Denver, CO, 80202	<b>PHONE NUMBER:</b> 435 781-9111 Ext
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 2517 FNL 1322 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SENW Section: 05 Township: 09.0S Range: 23.0E Meridian: S	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES  <b>COUNTY:</b> UINTAH  <b>STATE:</b> UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 1/29/2013  <input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:  <input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:  <input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> <b>APD EXTENSION</b> OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

**Approved by the Utah Division of Oil, Gas and Mining**

**Date:** February 19, 2013

**By:**

<b>NAME (PLEASE PRINT)</b> Vail Nazzaro	<b>PHONE NUMBER</b> 303 824-5590	<b>TITLE</b> Sr. Regulatory Assistant
<b>SIGNATURE</b> N/A		<b>DATE</b> 1/29/2013



**The Utah Division of Oil, Gas, and Mining**

- State of Utah  
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

**Request for Permit Extension Validation Well Number 43047405090000**

API: 43047405090000

Well Name: E CHAPITA 110-05

Location: 2517 FNL 1322 FWL QTR SENW SEC 05 TWP 090S RNG 230E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 2/18/2009

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated?  Yes  No
  
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location?  Yes  No
  
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well?  Yes  No
  
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location?  Yes  No
  
- Has the approved source of water for drilling changed?  Yes  No
  
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation?  Yes  No
  
- Is bonding still in place, which covers this proposed well?  Yes  No

Signature: Vail Nazzaro

Date: 1/29/2013

Title: Sr. Regulatory Assistant Representing: EOG RESOURCES, INC.

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>
<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> UTU01304	
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>	
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	
<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>	
<b>7. UNIT or CA AGREEMENT NAME:</b>	
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> E CHAPITA 110-05
<b>2. NAME OF OPERATOR:</b> EOG RESOURCES, INC.	<b>9. API NUMBER:</b> 43047405090000
<b>3. ADDRESS OF OPERATOR:</b> 600 17th Street, Suite 1000 N , Denver, CO, 80202	<b>PHONE NUMBER:</b> 435 781-9111 Ext
<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES	
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 2517 FNL 1322 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SENW Section: 05 Township: 09.0S Range: 23.0E Meridian: S	<b>COUNTY:</b> UINTAH
<b>STATE:</b> UTAH	


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: 1/7/2014	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Approved by the  
Utah Division of  
Oil, Gas and Mining

Date: January 08, 2014

By: 

<b>NAME (PLEASE PRINT)</b> Kaylene Gardner	<b>PHONE NUMBER</b> 435 781-9111	<b>TITLE</b> Regulatory Administrator
<b>SIGNATURE</b> N/A	<b>DATE</b> 1/7/2014	



**The Utah Division of Oil, Gas, and Mining**

- State of Utah  
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

**Request for Permit Extension Validation Well Number 43047405090000**

API: 43047405090000

Well Name: E CHAPITA 110-05

Location: 2517 FNL 1322 FWL QTR SENW SEC 05 TWP 090S RNG 230E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 2/18/2009

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated?  Yes  No
  
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location?  Yes  No
  
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well?  Yes  No
  
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location?  Yes  No
  
- Has the approved source of water for drilling changed?  Yes  No
  
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation?  Yes  No
  
- Is bonding still in place, which covers this proposed well?  Yes  No

Signature: Kaylene Gardner

Date: 1/8/2014

Title: Regulatory Administrator Representing: EOG RESOURCES, INC.



GARY R. HERBERT  
Governor

SPENCER J. COX  
Lieutenant Governor

# State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER  
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA  
Division Director

April 9, 2015

43 047 40509  
E, Chapita 110-05  
5 95 23E

EOG Resources, Inc.  
600 17th Street, Suite 1000 N.  
Denver, CO 80202

Re: APDs Rescinded EOG Resources, Inc., Uintah County


Ladies and Gentlemen:

Enclosed find the list of APDs that is being rescinded. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded as of April 9, 2015.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

  
Diana Mason  
Environmental Scientist

cc: Well File  
Bureau of Land Management, Vernal

43-047-50272 CWU 1417-33  
43-047-50255 CWU 1435-19  
43-047-50256 CWU 739-33  
43-047-50257 CWU 738-33  
43-047-50276 CWU 1420-34  
43-047-40508 E CHAPITA 112-05  
→ 43-047-40509 E CHAPITA 110-05  
43-047-50278 CWU 1436-19  
43-047-40510 E CHAPPITA 113-05  
43-047-52390 CWU 1013-21  
43-047-52392 NORTH CHAPITA 294-28  
43-047-52393 NORTH CHAPITA 194-33  
43-047-52388 CWU 1012-21