

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL						1. WELL NAME and NUMBER Federal 920-240	
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>						3. FIELD OR WILDCAT NATURAL BUTTES	
4. TYPE OF WELL Gas Well Coalbed Methane Well: NO						5. UNIT or COMMUNITIZATION AGREEMENT NAME	
6. NAME OF OPERATOR KERR-MCGEE OIL & GAS ONSHORE, L.P.						7. OPERATOR PHONE 720 929-6587	
8. ADDRESS OF OPERATOR P.O. Box 173779, Denver, CO, 80217						9. OPERATOR E-MAIL mary.mondragon@anadarko.com	
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) UTU-0579			11. MINERAL OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>			12. SURFACE OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input checked="" type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>	
13. NAME OF SURFACE OWNER (if box 12 = 'fee')						14. SURFACE OWNER PHONE (if box 12 = 'fee')	
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')						16. SURFACE OWNER E-MAIL (if box 12 = 'fee')	
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN') Ute			18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>			19. SLANT VERTICAL <input checked="" type="checkbox"/> DIRECTIONAL <input type="checkbox"/> HORIZONTAL <input type="checkbox"/>	
20. LOCATION OF WELL	FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN	
LOCATION AT SURFACE	854 FSL 1940 FEL	SWSE	24	9.0 S	20.0 E	S	
Top of Uppermost Producing Zone	854 FSL 1940 FEL	SWSE	24	9.0 S	20.0 E	S	
At Total Depth	854 FSL 1940 FEL	SWSE	24	9.0 S	20.0 E	S	
21. COUNTY UINTAH			22. DISTANCE TO NEAREST LEASE LINE (Feet) 854			23. NUMBER OF ACRES IN DRILLING UNIT 1920	
			25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 1000			26. PROPOSED DEPTH MD: 10300 TVD:	
27. ELEVATION - GROUND LEVEL 4841			28. BOND NUMBER			29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE Permit #43-8496	
ATTACHMENTS							
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORCANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES							
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER				<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN			
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)				<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER			
<input type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)				<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP			
NAME Kevin McIntyre			TITLE Regulatory Analyst I			PHONE 720 929-6226	
SIGNATURE			DATE 09/29/2008			EMAIL Kevin.McIntyre@anadarko.com	
API NUMBER ASSIGNED 43047501550000			APPROVAL  Permit Manager				

Proposed Hole, Casing, and Cement						
String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Surf	12.25	9.625	0	2800		
Pipe	Grade	Length	Weight			
	Grade J-55 LT&C	2800	36.0			
	Cement Interval	Top (MD)	Bottom (MD)			
		0	2800			
		Cement Description	Class	Sacks	Yield	Weight
			Premium Foamed Cement	215	1.18	15.6

Proposed Hole, Casing, and Cement						
String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Prod	7.875	4.5	0	10300		
Pipe	Grade	Length	Weight			
	Grade I-80 LT&C	10300	11.6			
	Cement Interval	Top (MD)	Bottom (MD)			
		0	10300			
		Cement Description	Class	Sacks	Yield	Weight
			Premium Lite High Strength	490	3.38	11.0
			Pozzuolanic Cement	1620	1.31	14.3

DRILLING PROGRAM

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'						
						3520	2020	453000
SURFACE	9-5/8"	0 to 2,800'	36.00	J-55	LTC	0.79	1.54	5.13
						7780	6350	201000
PRODUCTION	4-1/2"	0 to 10300	11.60	I-80	LTC	1.76	0.95	1.93

- 1) Max Anticipated Surf. Press.(MASP) (Surface Casing) = (Pore Pressure at next csg point - (0.22 psi/ft - partial evac gradient x TVD of next csg point))
 2) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft - partial evac gradient x TD)
 (Burst Assumptions: TD = 12.5 ppg) .22 psi/ft = gradient for partially evac wellbore
 (Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing * Buoy. Fact. of water)
 MASP 4120 psi

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	LEAD	500	Premium cmt + 2% CaCl + .25 pps flocele	215	60%	15.60	1.18
Option 1	TOP OUT CMT (1)	250	20 gals sodium silicate + Premium cmt + 2% CaCl + .25 pps flocele	100		15.60	1.18
	TOP OUT CMT (2)	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
SURFACE	Option 2	NOTE: If well will circulate water to surface, option 2 will be utilized					
	LEAD	2000	Prem cmt + 16% Gel + 10 pps gilsonite + .25 pps Flocele + 3% salt BWOC	230	35%	11.00	3.82
	TAIL	500	Premium cmt + 2% CaCl + .25 pps flocele	180	35%	15.60	1.18
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
PRODUCTION	LEAD	4,500'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	490	60%	11.00	3.38
	TAIL	5,800'	50/50 Poz/G + 10% salt + 2% gel + .1% R-3	1620	60%	14.30	1.31

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained
 *Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.
 BOPE: 11" 5M with one annular and 2 rams. Test to 5,000 psi (annular to 2,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.
 Drop Tolco surveys every 2000'. Maximum allowable hole angle is 5 degrees.
 Most rigs have PVT Systems for mud monitoring. If no PVT is available, visual monitoring will be utilized.

DRILLING ENGINEER: _____
 Brad Laney
 DRILLING SUPERINTENDENT: _____
 Randy Bayne

DATE: _____
 DATE: _____

**Federal 920-240
SWSE Sec. 24, T9S,R20E
UINTAH COUNTY, UTAH
UTU-0579**

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. Estimated Tops of Important Geologic Markers:

<u>Formation</u>	<u>Depth</u>
Uinta	0- Surface
Green River	1658'
Bird's Nest	1892'
Mahogany	2407'
Wasatch	5008'
Mesaverde	8156'
MVU2	9032'
MVL1	9459'
TD	10,300'

2. Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
	Green River	1658'
	Bird's Nest	1892'
	Mahogany	2407'
Gas	Wasatch	5008'
Gas	Mesaverde	8156'
Gas	MVU2	9032'
Gas	MVL1	9459'
Water	N/A	
Other Minerals	N/A	

3. Pressure Control Equipment (Schematic Attached)

Please see the Natural Buttes Unit Standard Operating Procedure (SOP).

4. Proposed Casing & Cementing Program:

Please see the Natural Buttes Unit SOP. See attached drilling diagram.

5. Drilling Fluids Program:

Please see the Natural Buttes Unit SOP.

6. Evaluation Program:

Please see the Natural Buttes Unit SOP.

7. Abnormal Conditions:

Maximum anticipated bottomhole pressure calculated at 10,300' TD, approximately equals 6386 psi (calculated at 0.62 psi/foot).

Maximum anticipated surface pressure equals approximately 4120 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. Anticipated Starting Dates:

Drilling is planned to commence immediately upon approval of this application.

9. Variances:

*Please see Natural Buttes Unit SOP Onshore Order #2 – Air Drilling Variance
Kerr-McGee Oil & Gas Onshore LP (KMG) respectfully requests a variance to several requirements associated with air drilling outlined in Onshore Order 2*

- *Blowout Prevention Equipment (BOPE) requirements;*
- *Mud program requirements; and*
- *Special drilling operation (surface equipment placement) requirements associated with air drilling.*

This Standard Operating Practices addendum provides supporting information as to why KMG current air drilling practices for constructing the surface casing hole should be granted a variance to Onshore Order 2 air drilling requirements.

The reader should note that the air rig is used only to construct a stable surface casing hole through a historically difficult lost circulation zone. A conventional rotary rig follows the air rig, and is used to drill and construct the majority of the wellbore.

More notable, KMG has used the air rig layout and procedures outlined below to drill the surface casing hole in approximately 675 wells without incident of blow out or loss of life.

Background

In a typical well, KMG utilizes an air rig for drilling the surface casing hole, an interval from the surface to surface casing depths, which varies in depth from 1,700 to 2,800 feet. The air rig drilling operation does not drill through productive or over pressured formations in KMG field, but does penetrate the Uinta and Green River Formations. The purpose of the air drilling operation is to overcome the severe loss circulation zone in the Green River known as the Bird's Nest while creating a stable hole for the surface casing. The surface casing hole is generally drilled to approximately 500 feet below the Bird's Nest.

Before the surface air rig is mobilized, a rathole rig is utilized to set and cement conductor pipe through a competent surface formation. Generally, the conductor is set at 40 feet. In some cases, conductor may be set deeper in areas that the surface formation is not found competent. This rig also drills the rat and mouse holes in preparation for the surface casing and production string drilling operations.

The air rig is then mobilized to drill the surface casing hole by drilling a 12-1/4 inch hole

to just above the Bird's Nest interval with an air hammer. The hammer is then tripped and replaced with a 12-1/4 inch tri-cone bit. The tri-cone bit is used to drill to the surface casing point, approximately 500 feet below the loss circulation zone (Bird's Nest). The 9-5/8 inch surface casing is then run and cemented in place, thereby isolating the lost circulation zone.

KMG fully appreciates Onshore Order 2 well control and safety requirements associated with a typical air drilling operations. However, the requirements of Onshore Order 2 are excessive with respect to the air rig layout and drilling operation procedures that are currently in practice to drill and control the surface casing hole in KMG Fields.

Variance for BOPE Requirements

The air rig operation utilizes a properly lubricated and maintained air bowl diverter system which diverts the drilling returns to a six-inch blooie line. The air bowl is the only piece of BOPE equipment which is installed during drilling operations and is sufficient to contain the air returns associated with this drilling operation. As was discussed earlier, the drilling of the surface hole does not encounter any over pressured or productive zones, and as a result standard BOPE equipment should not be required. In addition, standard drilling practices do not support the use of BOPE on 40 feet of conductor pipe.

Variance for Mud Material Requirements

Onshore Order 2 also states that sufficient quantities of mud materials shall be maintained or readily accessible for the purpose of assuring adequate well control. Once again, the surface hole drilling operations does not encounter over pressured or productive intervals, and as a result there is not a need to control pressure in the surface hole with a mud system. Instead of mud, the air rigs utilize water from the reserve pit for well control, if necessary. A skid pump which is located near the reserve pit (see attachment) will supply the water to the well bore.

Variance for Special Drilling Operation (surface equipment placement) Requirements

Onshore Order 2 requires specific safety distances or setbacks for the placement of associated standard air drilling equipment, wellbore, and reserve pits. The air rigs used to drill the surface holes are not typical of an air rig used to drill a producing hole in other parts of the US. These are smaller in nature and designed to fit a KMG location. The typical air rig layout for drilling surface hole in the field is attached.

Typically the blooie line discharge point is required to be 100 feet from the well bore. In the case of a KMG well, the reserve pit is only 45 feet from the rig and is used for the drill cuttings. The blooie line, which transports the drill cuttings from the well to the reserve pit, subsequently discharges only 45 feet from the well bore.

Typically the air rig compressors are required to be located in the opposite direction from the blooie line and a minimum of 100 feet from the well bore. At the KMG locations, the air rig compressors are approximately 40 feet from the well bore and approximately 60 feet from the blooie line discharge due to the unique air rig design. The air compressors (see attachment) are located on the rig (1250 cfm) and on a standby trailer (1170 cfm). A booster sits between the two compressors and boosts the output from 350 psi to 2000 psi. The design does put the booster and standby compressor opposite from the blooie line.

Lastly, Onshore Order 2 addresses the need for an automatic igniter or continuous pilot

light on the blooie line. The air rig does not utilize an igniter as the surface hole drilling operation does not encounter productive formations.


Conclusion

The air rig operating procedures and the attached air rig layout have effectively maintained well control while drilling the surface holes in KMG Fields. KMG respectfully requests a variance from Onshore Order 2 with respect to air drilling well control requirements as discussed above..

10. Other Information:

Please see Natural Buttes Unit SOP.

EXHIBIT A

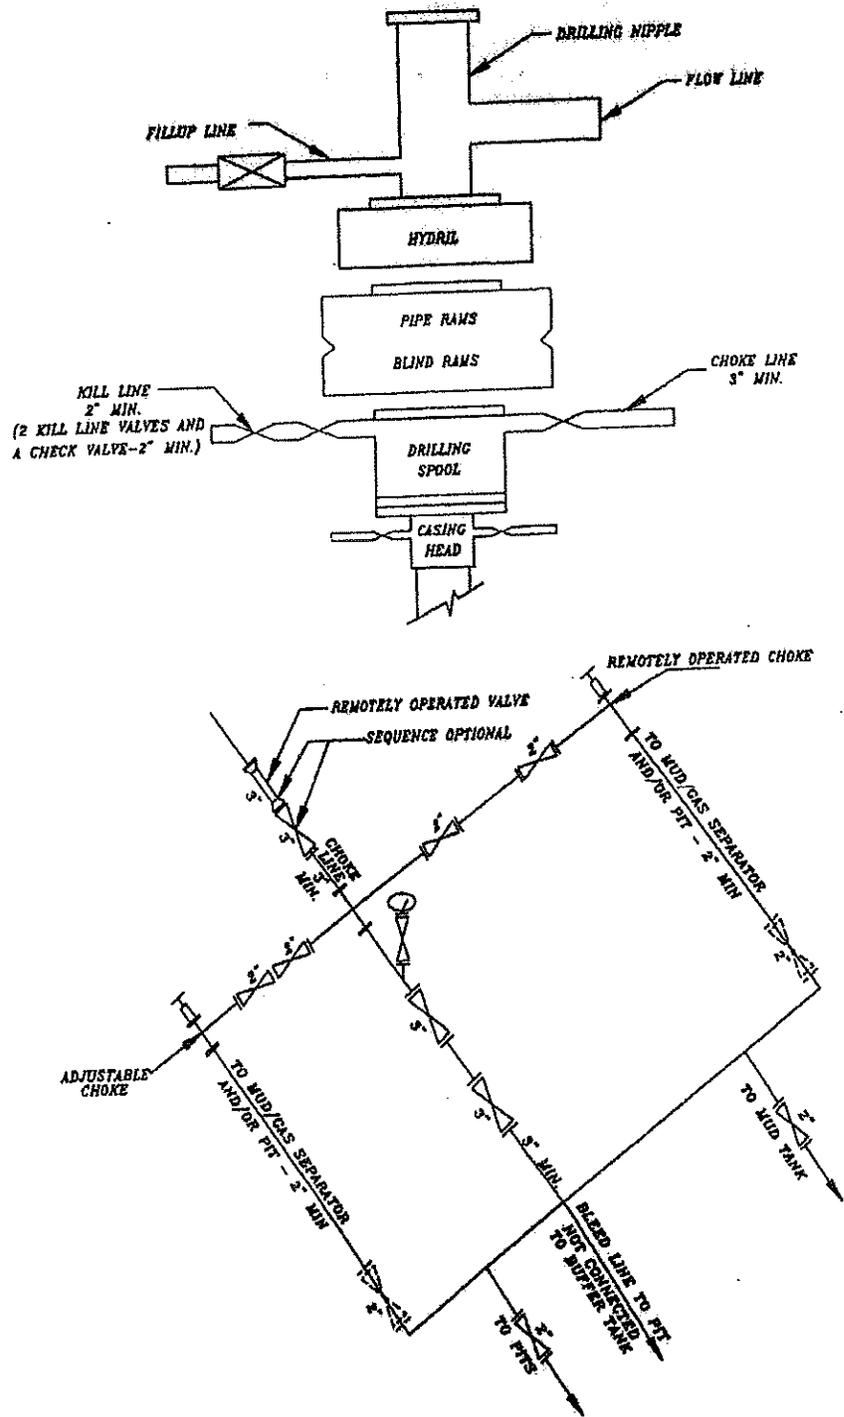

SCHEMATIC DIAGRAM OF 5,000 PSI BOP STACK

**Federal 920-240
SWSE Sec. 24 ,T9S,R20E
UINTAH COUNTY, UTAH
UTU-0579**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. Existing Roads:

Refer to the attached location directions.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

2. Planned Access Roads:

Approximately 1,000' +/- of new access road is proposed. Refer to Topo Map B.

Existence of pipelines; maximum grade; turnouts; major cut and fills, culverts, or bridges; gates, cattle guards, fence cuts, or modifications to existing facilities were determined at the on-site.

Please see the Natural Buttes Unit Standard Operating Procedure (SOP).

3. Location of Existing Wells Within a 1-Mile Radius:

Please refer to Topo Map C.

4. Location of Existing & Proposed Facilities:

Please see the Natural Buttes Unit SOP.

Refer to Topo Map D for the location of the proposed pipelines.

A right-of-way is required for the pipeline. The pipeline is approximately 1,255' in length and 30' in width. A 4" surface steel pipeline will be constructed utilizing existing disturbance where possible. The pipeline will be butt-welded together and pulled into place with a rubber tired tractor.

Variations to Best Management Practices (BMPs) Requested:

Approximately 1,255' of 4" steel pipeline will be installed on surface within the access corridor for the well location. As a Best Management Practice (BMP), the pipeline would be buried within the access road corridor if possible. The construction of pipelines requires the corridor of 30 feet.

This exception to the BMP should be granted by the BLM Authorized Officer because indurated bedrock, such as sandstone, is at or within 2 feet of the surface and the soil has a poor history for successful rehabilitation.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The requested color is Shadow gray (2.5Y 6/2), a non-reflective earthtone.

Interim Surface Reclamation Plan:

This exception is requested due to the current twin and multi-well program. If determined that this well will not be a candidate for either twinning &/or multi-well the operator shall spread the topsoil pile on the location up to the rig anchor points. The location will be reshaped to the original contour to the extent possible. The operator will reseed the area using the BLM recommended seed mixture and reclamation methods.

5. Location and Type of Water Supply:

Please see the Natural Buttes SOP.

6. Source of Construction Materials:

Please see the Natural Buttes SOP.

7. Methods of Handling Waste Materials:

Please see the Natural Buttes SOP.

A plastic reinforced liner is to be used as discussed during on-site inspection. It will be a minimum of 20 mil thick and felt, with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec. 35, T9S R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E, Pipeline Facility Sec. 36, T9S, R20E, Goat Pasture Evaporation Pond SW/4 Sec. 16, T10S, R22E, Bonanza Evaporation Pond Sec. 2, T10S, R23E (*Request is in lieu of filing Form 3160-5, after initial production*).

8. Ancillary Facilities:

Please see the Natural Buttes SOP.

9. **Well Site Layout:** (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

Location size may change prior to the drilling of the well due to the current rig availability. If the proposed location is not large enough to accommodate the drilling rig. The location will be re-surveyed and a form 3160-5 will be submitted.

10. **Plans for Reclamation of the Surface:**

Please see the Natural Buttes SOP.

Upon reclamation of the pit the following seed mixture will be used. A total of 12 lbs/acre will be used if the seeds are drilled (24 lbs/acre if the seeds are broadcast). The per acre requirements for *drilled* seed are:

Crested Wheatgrass 12 lbs.

Operator shall call the BLM for the seed mixture when final reclamation occurs.

11. **Surface/Mineral Ownership:**

The well pad and access road are located on lands owned by:

Ute Indian Tribe
P.O. Box 70
Fort Duchesne, Utah 84026
(435) 722-5141

The mineral ownership is listed below:

United States of America
Bureau of Land Management
170 South 500 East
Vernal, UT 84078
(435)781-4400

12. Stipulations/Notices/Mitigation:

There are no stipulations or notices for this location.

13. Other Information:

A Class III archaeological survey and a paleontological survey have been performed and will be submitted.

This location is not within 460' from the boundary of the Natural Buttes Unit, nor is it within 460' of any non-committed tract lying within the boundaries of the Unit.

14. Lessee's or Operator's Representative & Certification:

Kevin McIntyre
Regulatory Analyst
Kerr-McGee Oil & Gas Onshore LP
P.O. Box 173779
Denver, CO 80217-3779
(720) 929-6226

Randy Bayne
Drilling Manager
Kerr-McGee Oil & Gas Onshore LP
1368 South 1200 East
Vernal, UT 84078
(435) 781-7018


Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

Kerr-McGee Oil & Gas Onshore LP is considered to be the operator of the subject well. Kerr-McGee Oil & Gas Onshore LP agrees to be responsible under the terms and conditions of the lease for the operations conducted upon leased lands.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by Bureau of Land Management Nationwide Bond #WYB000291.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.


Kevin McIntyre

9/24/2008

Date

T9S, R20E, S.L.B.&M.

S88°26'W 81.58 (G.L.O.)
S88°26'58"W - 2692.14' (Meas.)

Found 1968
Brass Cap.
Pile of Stones.

Found 1968
Brass Cap.
Pile of Stones.

FEDERAL 920-240 (Proposed Well Head)
NAD 83 LATITUDE = 40.01603' (40° 00' 57.72")
LONGITUDE = 109.61220' (109° 36' 43.92")
NAD 27 LATITUDE = 40.01607' (40° 00' 57.85")
LONGITUDE = 109.61151' (109° 36' 41.43")

Found 1968
Brass Cap.
Pile of Stones.

Found 1968
Brass Cap.
Pile of Stones.

24

WELL LOCATION: FEDERAL 920-240

ELEV. UNGRADED GROUND = 4841.4'

Proposed Well

1940'

854'

Found 1968
Brass Cap.
Pile of Stones.
Cap is on a
Fence Line.

NO0°54'16"W (Basis of Bearings)
2736.99' (Measured)
NO°54'W 41.47 (G.L.O.)

Found 1968
Brass Cap.
Galvanised Pipe
& Cap.
Pile of Stones.
Cap is on a
Fence Line.

Found 1968
Brass Cap.
Pile of Stones.
Cap is on a
Fence Line.

S88°08'02"W - 2662.15' (Meas.)
S88°07'W 40.35 (G.L.O.)


S89°04'00"W - 2551.20' (Meas.)
S89°04'W 38.60 (G.L.O.)

N2°48'W 81.08 (G.L.O.)
NO1°51'20"W - 2674.48' (Meas.)


NO1°01'10"W - 2626.33' (Meas.)
N1°02'W 39.79 (G.L.O.)

NOTES:

- ▲ = Section Corners Located
- 1. Well footages are measured at right angles to the Section Lines.
- 2. G.L.O. distances are shown in feet or chains. 1 chain = 66 feet.
- 3. Bearings are based on Global Positioning Satellite observations.
- 4. Basis of elevation is the Northwest Corner of Section 12, T9S, R20E, S.L.B.&M. The elevation of this Section Corner is shown on the Ouray SE 7.5 Min. Quadrangle as being 4676'.



SCALE



SURVEYOR'S CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

No. 6028691
JOHN R. SLAUGH
REGISTERED LAND SURVEYOR
REGISTRATION No. 6028691
STATE OF UTAH

Kerr-McGee
Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

FEDERAL 920-240
WELL PLAT
854' FSL, 1940' FEL
SW ¼ SE ¼ OF SECTION 24, T9S, R20E,
S.L.B.&M. UTAH COUNTY, UTAH.

CONSULTING, LLC
371 Coffeen Avenue
Sheridan WY 82801
Phone 307-674-0609
Fax 307-674-0182

TIMBERLINE (435) 789-1365
ENGINEERING & LAND SURVEYING, INC.
38 WEST 100 NORTH - VERNAL, UTAH 84078

DATE SURVEYED: 06-27-08	SURVEYED BY: B.J.S.	SHEET 1 OF 9
DATE DRAWN: 08-03-08	DRAWN BY: B.R.B. J.R.S.	
SCALE: 1" = 1000'	Date Last Revised: 09-12-08	

WELL PAD LEGEND

● WELL LOCATION
 --- EXISTING CONTOURS (2' INTERVAL)
 - - - PROPOSED CONTOURS (2' INTERVAL)


WELL PAD FEDERAL 920-240 QUANTITIES

EXISTING GRADE @ LOC. STAKE = 4,841.4'
 FINISHED GRADE ELEVATION = 4,839.4'
 CUT SLOPES = 1.5:1
 FILL SLOPES = 1.5:1



TOTAL CUT FOR WELL PAD = 12,275 C.Y.
 TOTAL FILL FOR WELL PAD = 11,429 C.Y.
 TOPSOIL @ 6" DEPTH = 3,124 C.Y.
 TOTAL DISTURBANCE = 3,87 ACRES
 SHRINKAGE FACTOR = 1.15

SWELL FACTOR = 1.00
 RESERVE PIT CAPACITY (2' OF FREEBOARD)
 +/- 25,880 BARRELS
 RESERVE PIT VOLUME
 +/- 7,185 CY

BACKFLOW PIT CAPACITY (2' OF FREEBOARD)
 +/- 8,780 BARRELS
 BACKFLOW PIT VOLUME
 +/- 2,520 CY



Timberline
Engineering & Land Surveying, Inc.
 38 WEST 100 NORTH VERNAL, UTAH 84078
 (435) 789-1565

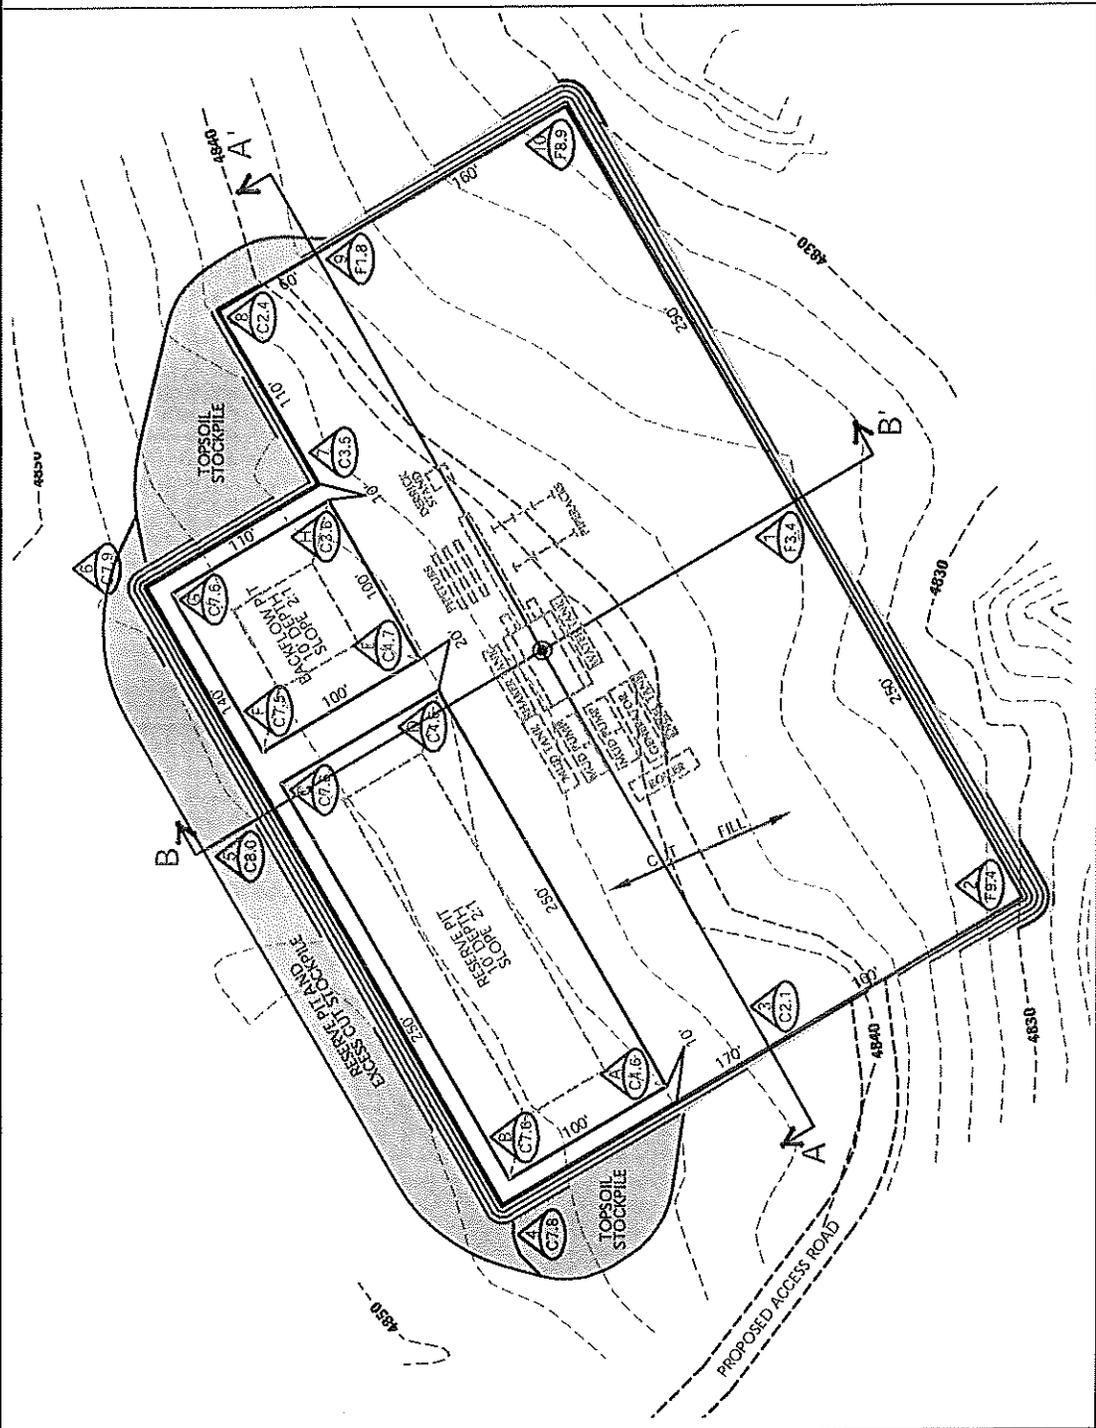


609 CONSULTING, LLC
 371 Coffeen Avenue
 Sheridan WY 82801
 Phone 307-674-0609
 Fax 307-674-0182


KERR-MCGEE OIL & GAS
ONSHORE L.P.
 1099 18th Street - Denver, Colorado 80202

FEDERAL 920-240
WELL PAD - LOCATION LAYOUT
 854' FSL, 1940' FEL
 SW1/4SE1/4, SECTION 24, T.9S., R.20E.
 S.L.B.&M., Uintah County, Utah


Scale: 1"=100'	Date: 8/29/08	SHEET NO:
REVISOR:	BY	DATE
		2 OF 9

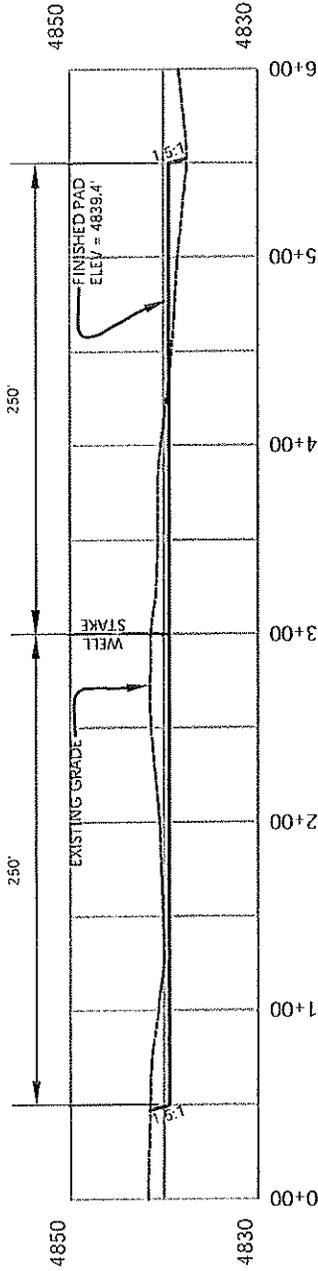


CROSS SECTION A-A'

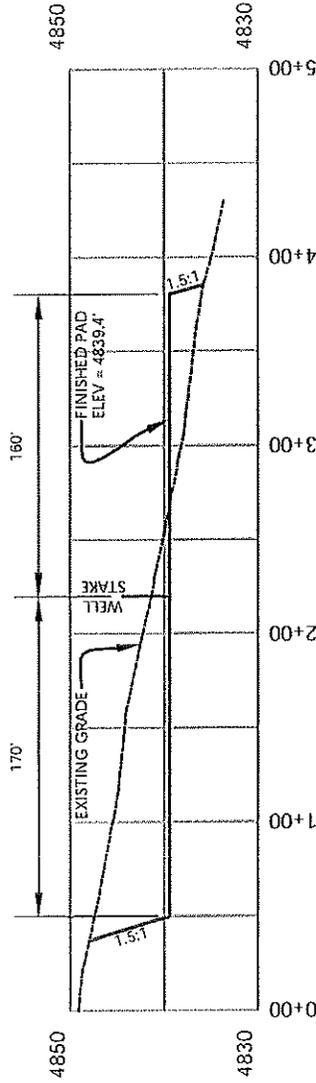

CROSS SECTION B-B'



Timberline (435) 789-1365
 Engineering & Land Surveying, Inc.
 38 WEST 100 NORTH
 VERNAL, UTAH 84078



KERR-MCGEE OIL & GAS
 ONSHORE L.P.
 1099 18th Street - Denver, Colorado 80202

FEDERAL 920-240
 WELL PAD - CROSS SECTIONS
 854' FSL, 1940' FEL
 SW1/4SE1/4, SECTION 24, T.9S., R.20E.
 S.L.B.&M., UINTAH COUNTY, UTAH

Scale: 1"=100'	Date: 8/29/08	SHEET NO:
REVISID:	BY DATE	3 OF 9

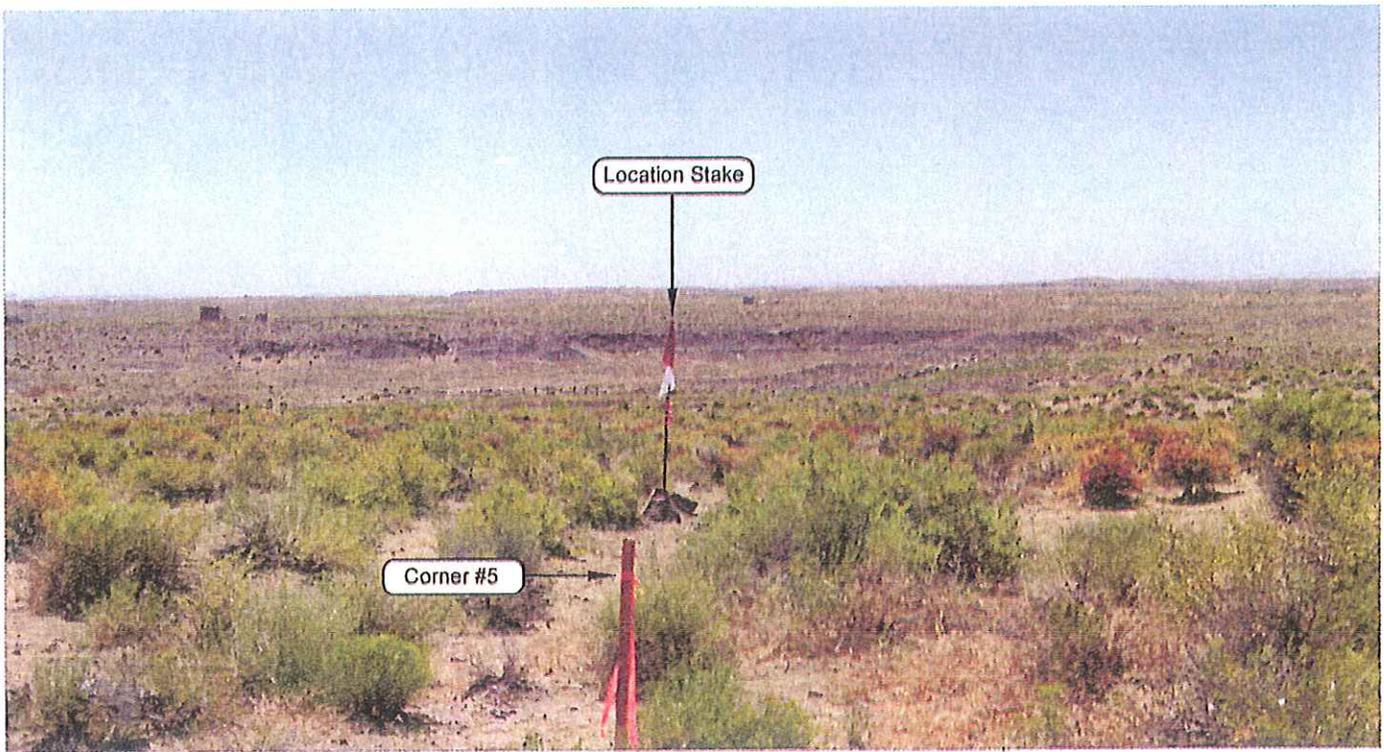


PHOTO VIEW: FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: SOUTHEASTERLY



PHOTO VIEW: FROM BEGINNING OF PROPOSED ROAD

CAMERA ANGLE: SOUTHEASTERLY

Kerr-McGee
Oil & Gas Onshore, LP
 1099 18th Street - Denver, Colorado 80202

FEDERAL 920-240
 854' FSL, 1940' FEL
 SW $\frac{1}{4}$ SE $\frac{1}{4}$ OF SECTION 24, T9S, R20E,
 S.L.B.&M. UINTAH COUNTY, UTAH.



CONSULTING, LLC
 371 Coffeen Avenue
 Sheridan WY 82801
 Phone 307-674-0609
 Fax 307-674-0182

LOCATION PHOTOS

TAKEN BY: M.S.B. | DRAWN BY: B.R.B.

DATE TAKEN: 07-31-08

DATE DRAWN: 08-01-08

REVISED: 09-12-08


Timberline (435) 789-1365
 Engineering & Land Surveying, Inc.
 38 WEST 100 NORTH VERNAL, UTAH 84078

SHEET
4
 OF 9

Kerr-McGee Oil & Gas Onshore, LP
FEDERAL 920-240
Section 24, T9S, R20E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 13.9 MILES TO THE JUNCTION OF STATE HIGHWAY 88. EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION ALONG STATE HIGHWAY 88 APPROXIMATELY 16.8 MILES TO OURAY, UTAH. FROM OURAY, PROCEED IN A SOUTHERLY DIRECTION ALONG THE SEEP RIDGE ROAD (COUNTY B ROAD 2810) APPROXIMATELY 5.3 MILES TO THE INTERSECTION OF AN EXISTING ROAD TO THE EAST. EXIT LEFT AND PROCEED IN A NORTHEASTERLY DIRECTION ALONG EXISTING ROAD APPROXIMATELY 3.8 MILES TO THE PROPOSED ACCESS ROAD FOR FEDERAL 920-24N. FOLLOW 920-24N ROAD FLAGS IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 2,800 FEET TO THE PROPOSED ACCESS ROAD. FOLLOW ROAD FLAGS IN A SOUTHEASTERLY DIRECTION APPROXIMATELY 800 FEET TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 40.5 MILES IN A SOUTHERLY DIRECTION.

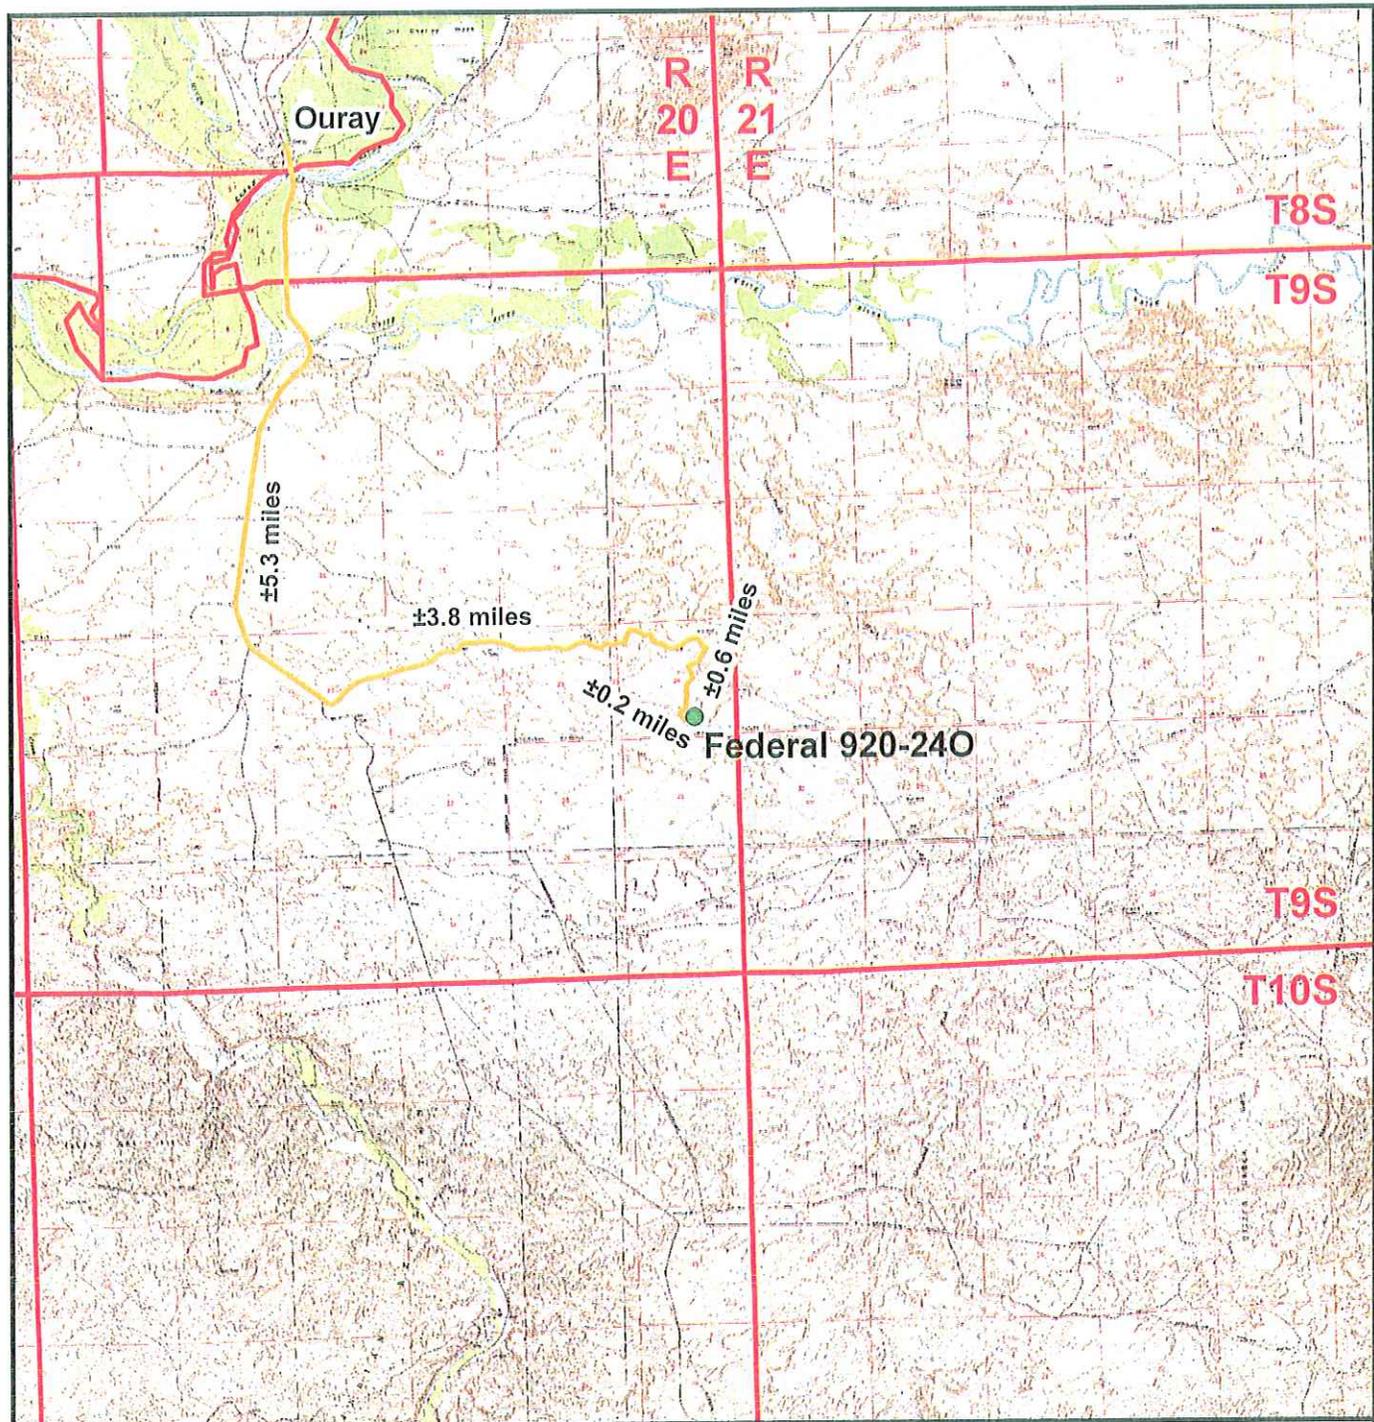

Legend

- Proposed Federal 920-240 Well Location
- Access Route - Proposed


Kerr-McGee Oil & Gas Onshore, LP
 1099 18th Street, Denver, Colorado 80202

Federal 920-240
Topo A
 854' FSL, 1940' FEL
 SW¼ SE¼, Section 24, T9S, R20E
 S.L.B.&M., Uintah County, Utah

CONSULTING, LLC
 371 Coffeen Avenue
 Sheridan, WY 82801
 Phone (307) 674-0609
 Fax (307) 674-0182



Scale: 1:100,000	NAD83 USP Central	Sheet No:
Drawn: JELo	Date: 26 Aug 2008	5
Revised:	Date:	

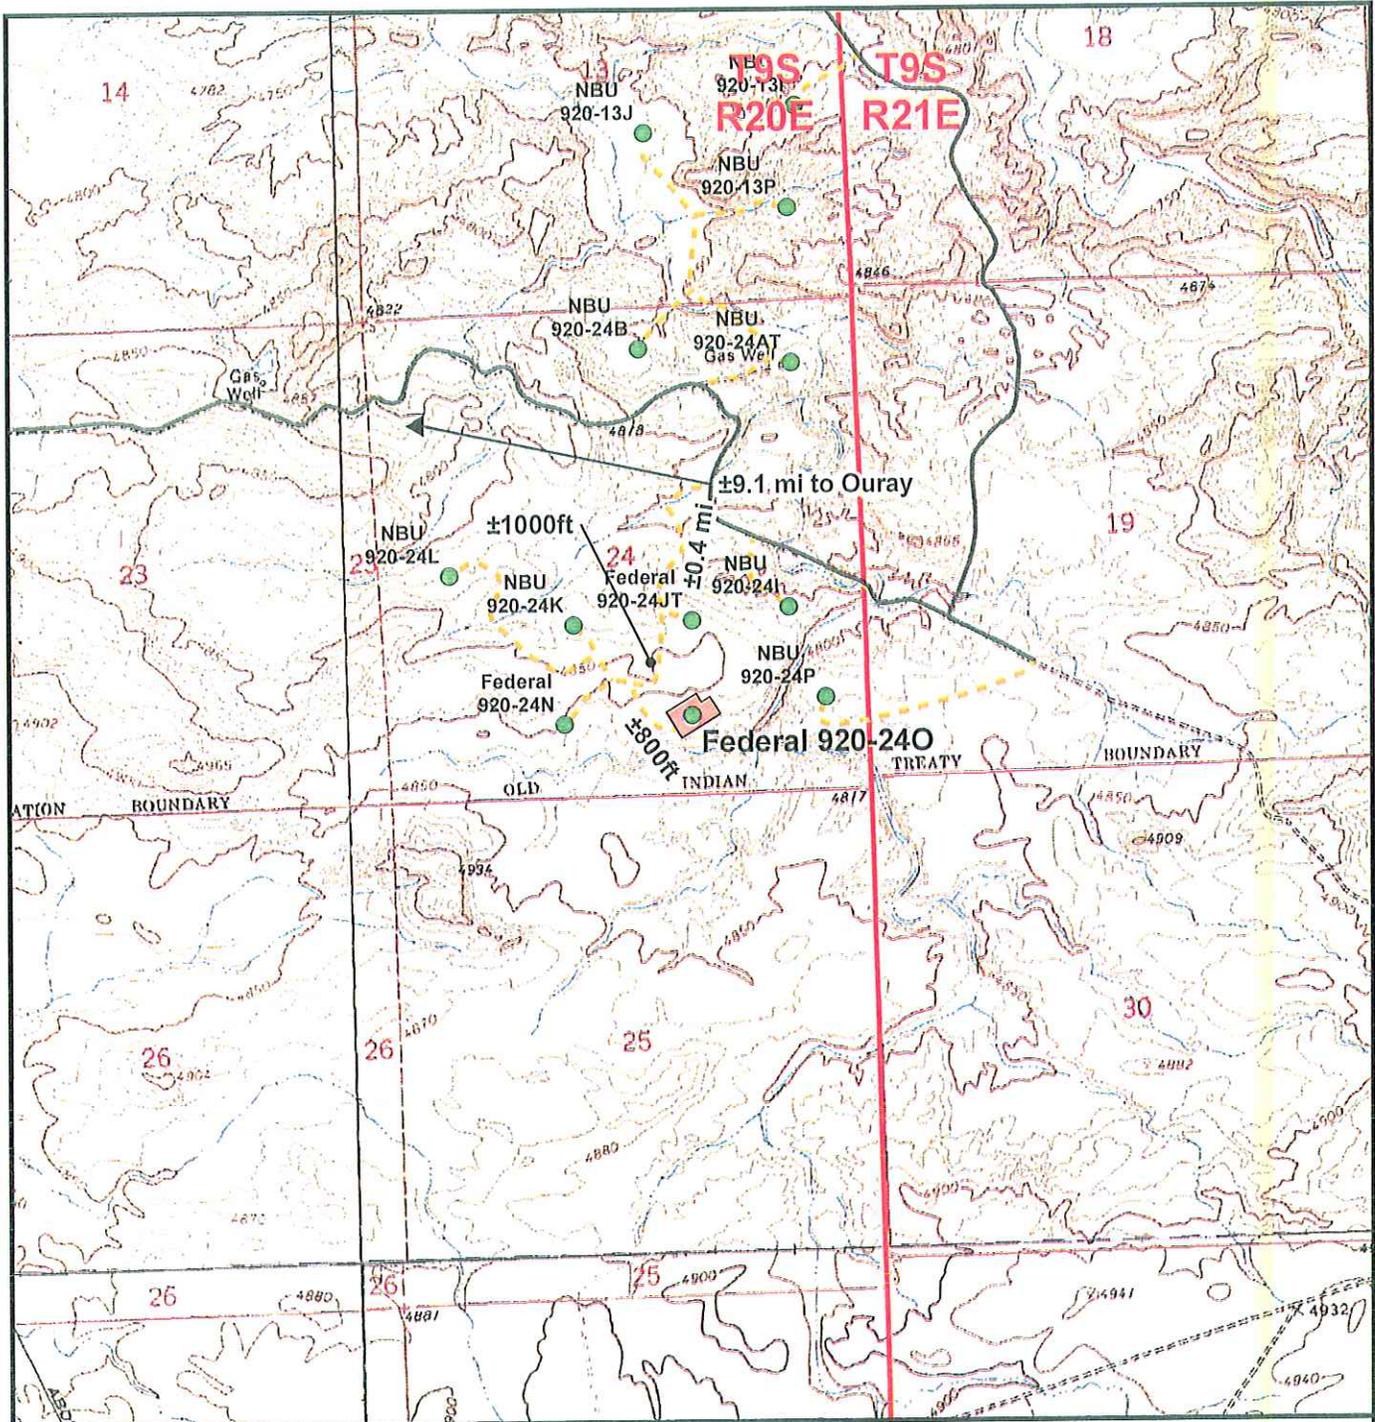

Legend

- Well - Proposed
- Well Pad
- Road - Proposed
- Road - Existing

Total Proposed Road Length: ±1,800ft

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street, Denver, Colorado 80202


Federal 920-24O
Topo B
854' FSL, 1940' FEL
SW¼ SE¼, Section 24, T9S, R20E
S.L.B.&M., Uintah County, Utah



CONSULTING, LLC
371 Coffeen Avenue
Sheridan, WY 82801
Phone (307) 674-0609
Fax (307) 674-0182



Scale: 1" = 2000ft	NAD83 USP Central	Sheet No:
Drawn: JELo	Date: 26 Aug 2008	6
Revised:	Date:	

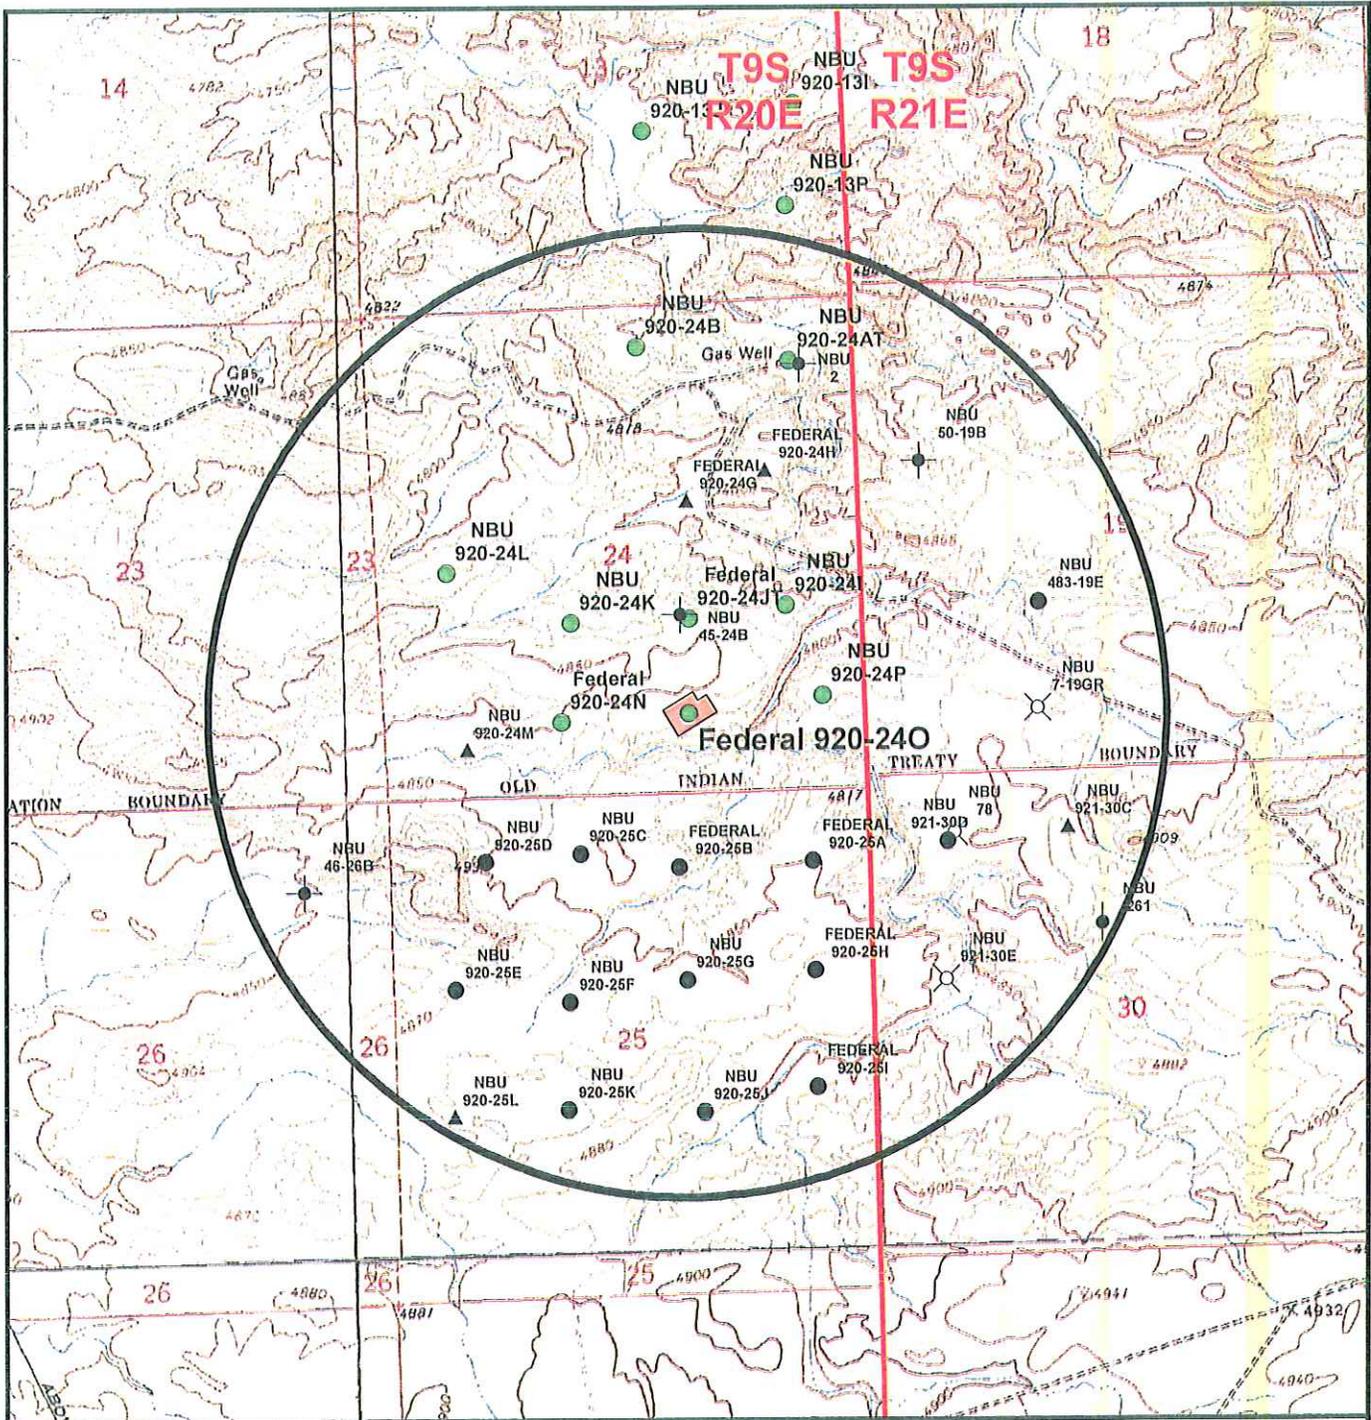

Legend

- Well - Proposed
- Well - 1 Mile Radius
- Producing
- Approved permit (APD); not yet spudded
- Spudded (Drilling commenced: Not yet complete)
- Location Abandoned
- Shut-In
- Well Pad
- Temporarily-Abandoned
- Plugged and Abandoned

Well locations derived from State of Utah, Dept. of Natural Resources, Division of Oil, Gas and Mining

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street, Denver, Colorado 80202


Federal 920-240
Topo C
854' FSL, 1940' FEL
SW¼ SE¼, Section 24, T9S, R20E
S.L.B.&M., Uintah County, Utah



CONSULTING, LLC
371 Coffeen Avenue
Sheridan, WY 82801
Phone (307) 674-0609
Fax (307) 674-0182



Scale: 1" = 2000ft	NAD83 USP Central	Sheet No:
Drawn: JELo	Date: 26 Aug 2008	7
Revised:	Date:	7 of 9

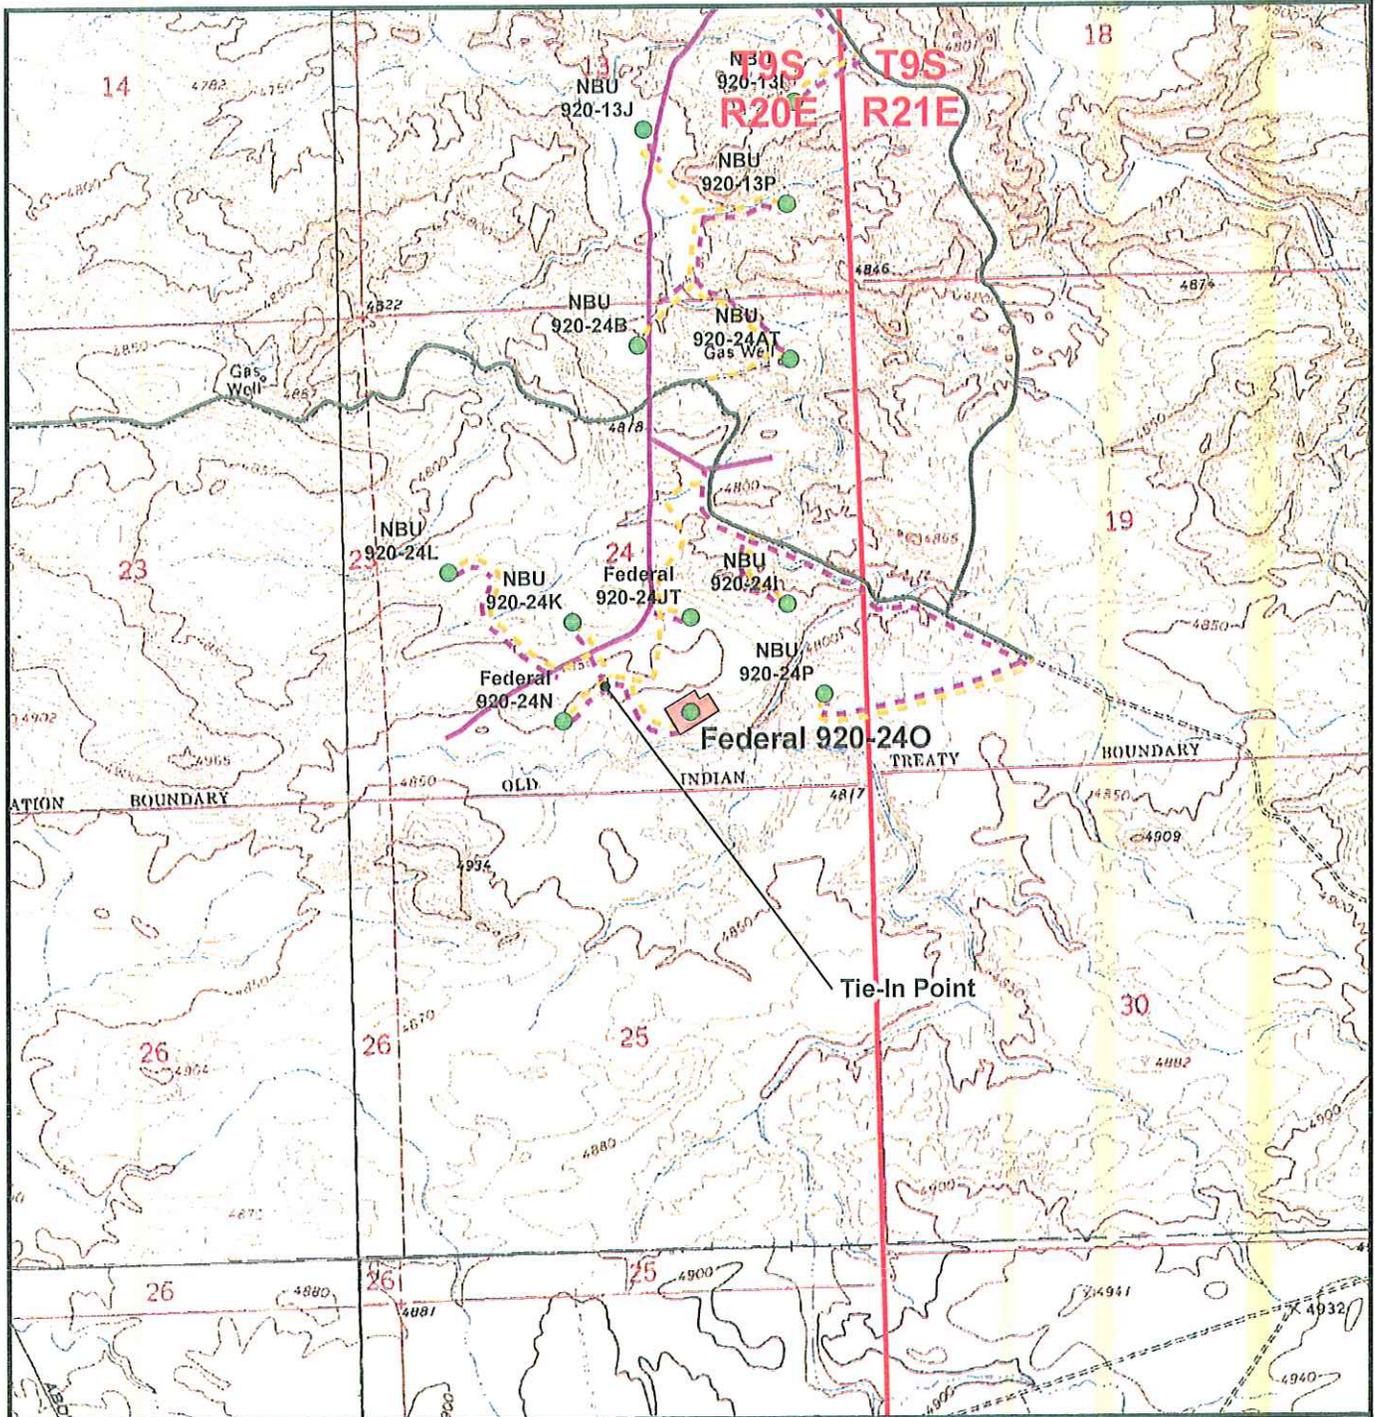

Legend

- Well - Proposed
- Well Pad
- Pipeline - Proposed
- Road - Proposed
- Pipeline - Existing
- Road - Existing

Total Proposed Pipeline Length: ±1,255ft

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street, Denver, Colorado 80202

Federal 920-240
Topo D
854' FSL, 1940' FEL
SW¼ SE¼, Section 24, T9S, R20E
S.L.B.&M., Uintah County, Utah



CONSULTING, LLC
371 Coffeen Avenue
Sheridan, WY 82801
Phone (307) 674-0609
Fax (307) 674-0182



Scale: 1" = 2000ft	NAD83 USP Central	Sheet No: 8
Drawn: JELO	Date: 26 Aug 2008	8 8 of 9
Revised:	Date:	

API Number: 4304750155

Well Name: Federal 920-240



Township 09.0 S Range 20.0 E Section 24

Meridian: SLBM

Operator: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Map Prepared:
Map Produced by Diana Mason

Units	Wells Query Events
STATUS	<all other values>
ACTIVE	GIS_STAT_TYPE
EXPLORATORY	<Null>
GAS STORAGE	APD
NF PP OIL	DRL
NF SECONDARY	GI
PI OIL	GS
PP GAS	LA
PP GEOTHERML	NEW
PP OIL	OPS
SECONDARY	PA
TERMINATED	PGW
Fields	POW
STATUS	RET
ACTIVE	SGW
COMBINED	SOW
Sections	TA
Township	TW
	WD
	WI
	WS
	Bottom Hole Location

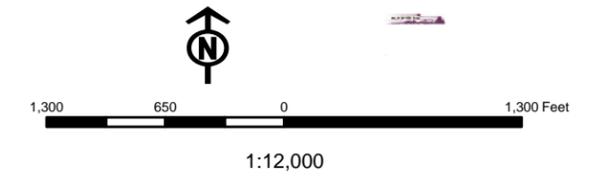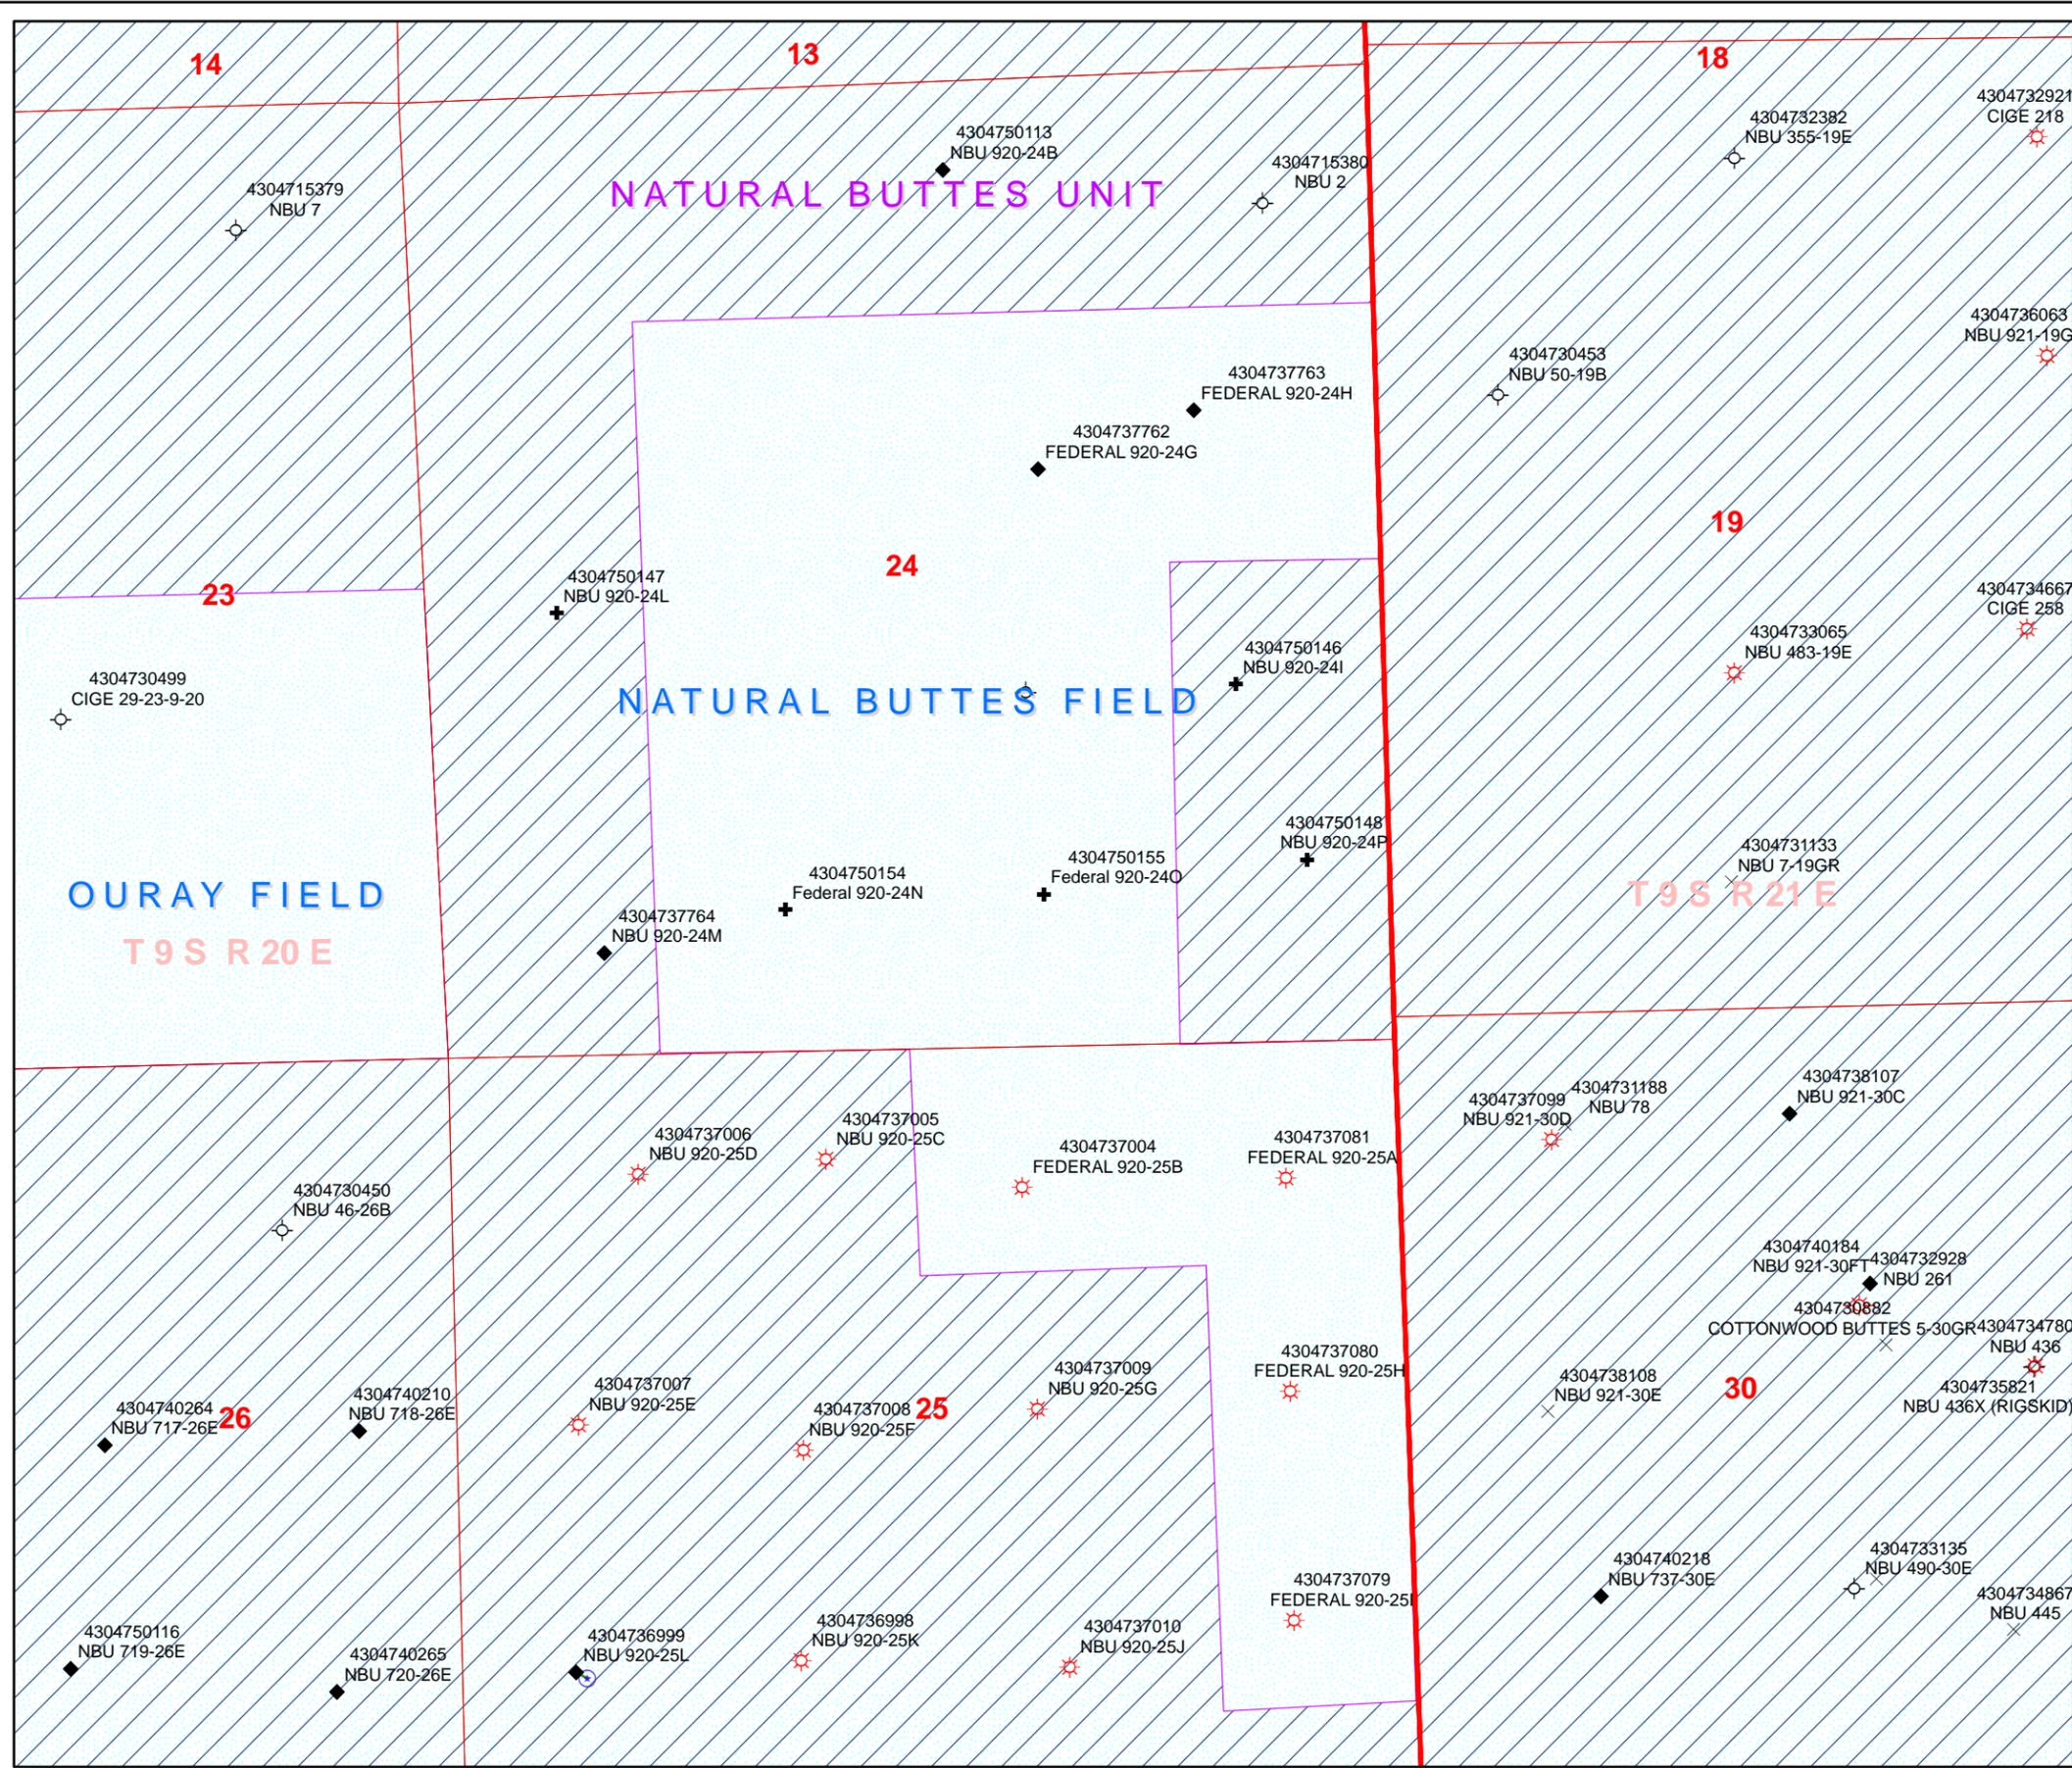

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 9/24/2008

API NO. ASSIGNED: 43047501550000

WELL NAME: Federal 920-240

OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P. (N2995)

PHONE NUMBER: 720 929-6226

CONTACT: Kevin McIntyre

PROPOSED LOCATION: SWSE 24 090S 200E

Permit Tech Review:

SURFACE: 0854 FSL 1940 FEL

Engineering Review:

BOTTOM: 0854 FSL 1940 FEL

Geology Review:

COUNTY: UINTAH

LATITUDE: 40.01595

LONGITUDE: -109.61146

UTM SURF EASTINGS: 618503.00

NORTHINGS: 4430240.00

FIELD NAME: NATURAL BUTTES

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-0579

PROPOSED FORMATION: WSMVD

SURFACE OWNER: 2 - Indian

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

- PLAT**
- Bond:** FEDERAL - WYB000291
- Potash**
- Oil Shale 190-5**
- Oil Shale 190-3**
- Oil Shale 190-13**
- Water Permit:** Permit #43-8496
- RDCC Review:**
- Fee Surface Agreement**
- Intent to Commingle**

LOCATION AND SITING:

- R649-2-3.**
 - Unit:**
 - R649-3-2. General**
 - R649-3-3. Exception**
 - Drilling Unit**
 - Board Cause No:** R649-3-2
 - Effective Date:**
 - Siting:**
 - R649-3-11. Directional Drill**
-

Comments: Presite Completed

Stipulations: 4 - Federal Approval - dmason
17 - Oil Shale 190-5(b) - dmason



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: Federal 920-24O
API Well Number: 43047501550000
Lease Number: UTU-0579
Surface Owner: INDIAN
Approval Date: 9/29/2008

Issued to:

KERR-MCGEE OIL & GAS ONSHORE, L.P. , P.O. Box 173779, Denver, CO 80217

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of R649-3-2.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

In accordance with the Order in Cause No. 190-5(b) dated October 28, 1982, the operator shall comply with the requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operators shall ensure that the surface and or production casing is properly cemented over the entire oil shale section as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the division.

Notification Requirements:

Notify the Division with 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.


Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281 office (801) 733-0983 home

Reporting Requirements:

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

Approved By:

A handwritten signature in black ink, appearing to read "Gil Hunt". The signature is written in a cursive style with a long horizontal stroke extending to the right.

Gil Hunt
Associate Director, Oil & Gas

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-0579
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: Ute 7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: Federal 920-240
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.	9. API NUMBER: 43047501550000
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	PHONE NUMBER: 720 929-6007 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0854 FSL 1940 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSE Section: 24 Township: 09.0S Range: 20.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 9/28/2009	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: _____

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Kerr-McGee Oil & Gas Onshore, L.P. (Kerr-McGee) respectfully requests an extension to this APD for the maximum time allowed. Please contact the undersigned with any questions and/or comments. Thank you.

Approved by the Utah Division of Oil, Gas and Mining

Date: September 30, 2009

By:

NAME (PLEASE PRINT) Danielle Piernot	PHONE NUMBER 720 929-6156	TITLE Regulatory Analyst
SIGNATURE N/A	DATE 9/24/2009	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047501550000

API: 43047501550000

Well Name: Federal 920-240

Location: 0854 FSL 1940 FEL QTR SWSE SEC 24 TWP 090S RNG 200E MER S

Company Permit Issued to: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date Original Permit Issued: 10/1/2008

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No


**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Danielle Piernot

Date: 9/24/2009

Title: Regulatory Analyst **Representing:** KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date: September 30, 2009

By: 

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-0579
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: Ute 7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: FEDERAL 920-240
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.	9. API NUMBER: 43047501550000
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	PHONE NUMBER: 720 929-6007 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0854 FSL 1940 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSE Section: 24 Township: 09.0S Range: 20.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 9/30/2010 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Kerr-McGee Oil & Gas Onshore, L.P. (Kerr-McGee) respectfully requests an extension to this APD for the maximum time allowed. Please contact the undersigned with any questions and/or comments. Thank you.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: October 06, 2010
 By: 

NAME (PLEASE PRINT) Danielle Piernot	PHONE NUMBER 720 929-6156	TITLE Regulatory Analyst
SIGNATURE N/A	DATE 9/30/2010	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047501550000

API: 43047501550000

Well Name: FEDERAL 920-240

Location: 0854 FSL 1940 FEL QTR SWSE SEC 24 TWP 090S RNG 200E MER S

Company Permit Issued to: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date Original Permit Issued: 10/1/2008

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Danielle Piernot

Date: 9/30/2010

Title: Regulatory Analyst **Representing:** KERR-MCGEE OIL & GAS ONSHORE,

Date: October 06, 2010

By: 

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-0579
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: Ute
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: FEDERAL 920-240	
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.	9. API NUMBER: 43047501550000	
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	PHONE NUMBER: 720 929-6515 Ext	9. FIELD and POOL or WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0854 FSL 1940 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSE Section: 24 Township: 09.0S Range: 20.0E Meridian: S	COUNTY: UINTAH	
		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 10/1/2011 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	
	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.		
<p>Kerr-McGee Oil & Gas Onshore, L.P. (Kerr-McGee) respectfully requests an extension to this APD for the maximum time allowed. Please contact the undersigned with any questions and/or comments. Thank you.</p>		
		<p>Approved by the Utah Division of Oil, Gas and Mining</p> <p>Date: <u>09/20/2011</u></p> <p>By: </p>
NAME (PLEASE PRINT) Danielle Piernot	PHONE NUMBER 720 929-6156	TITLE Regulatory Analyst
SIGNATURE N/A	DATE 9/19/2011	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047501550000

API: 43047501550000

Well Name: FEDERAL 920-240

Location: 0854 FSL 1940 FEL QTR SWSE SEC 24 TWP 090S RNG 200E MER S

Company Permit Issued to: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date Original Permit Issued: 10/1/2008

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Danielle Piernot

Date: 9/19/2011

Title: Regulatory Analyst **Representing:** KERR-MCGEE OIL & GAS ONSHORE, L.P.



State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

May 9, 2012

Jenn Hawkins
Anadarko Petroleum Corporation
1099 18th Street, Suite 1800
Denver, CO 80202

Re: APDs Rescinded for Anadarko Petroleum Corporation
Uintah County

Dear Ms. Hawkins:

Enclosed find the list of APDs that you requested to be rescinded. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded, effective May 2, 2012.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal
SITLA, Ed Bonner



4304750055	NBU 753-32E	4304740374	NBU 705-26E
4304750683	NBU 634-12EX	4304750123	NBU 920-12N
4304740346	NBU 921-15N1S	4304750143	NBU 920-13J
4304740347	NBU 921-14M3S	4304750751	NBU 920-21G
4304740348	NBU 921-22A1S	4304750756	NBU 1022-35I1CS
4304750089	NBU 921-15O3T	4304750757	NBU 1022-35I4BS
4304740441	NBU 1022-25G2S	4304750758	NBU 1022-35J1CS
4304740442	NBU 1022-25G4S	4304750759	NBU 1022-35J4CS
4304740443	NBU 1022-25G3S	4304740380	NBU 920-13D
4304750852	FEDERAL 920-23O	4304750155	FEDERAL 920-24O
4304751026	NBU 921-12K	4304750769	NBU 1022-35K4CS
4304751027	NBU 921-12L	4304750770	NBU 1022-35N1CS
4304751028	NBU 921-12M	4304750771	NBU 1022-35O1BS
4304751039	NBU 920-21O	4304750772	NBU 1022-35O1CS
4304750697	NBU 687-30E	4304750791	NBU 921-10O
4304750811	NBU 699-25E	4304750792	NBU 921-10M
4304740153	NBU 1022-05JT	4304740439	NBU 1022-24P2S
4304740135	NBU 921-15MT	4304740440	NBU 1022-24P4S
4304750468	NBU 738-30E		
4304739369	NBU 922-18O		
4304739372	NBU 922-20E		
4304740184	NBU 921-30FT		
4304740217	NBU 759-29E		
4304740218	NBU 737-30E		
4304750461	NBU 1022-24O2S		
4304740267	NBU 704-26E		
4304740240	NBU 702-26E		
4304740241	NBU 703-26E		
4304750578	NBU 920-14B		
4304750579	NBU 920-14A		
4304740268	NBU 701-26E		
4304750627	NBU 920-21P		
4304750628	NBU 920-21N		
4304750682	NBU 921-12J		
4304750695	NBU 921-12N		
4304750111	NBU 921-11GT		
4304750112	NBU 921-11HT		
4304750118	NBU 740-30E		

United States Department of the Interior



BUREAU OF LAND MANAGEMENT

Green River District-Vernal Field Office

170 South 500 East

Vernal, UT 84078

(435) 781-4400 Fax: (435) 781-4410

<http://www.blm.gov/ut/st/en/fo/vernal.html>



MAY 14 2012

IN REPLY REFER TO:
3160 (UTG011)

Julie Jacobson
Anadarko Petroleum Corporation
Kerr McGee Oil & Gas Onshore LP
1099 18th Street, Suite 600
Denver, CO 80202

43 047 50155

Re: Request to Return APD
Well No. Federal 920-240
SWSE, Sec. 24, T9S, R20E
Uintah County, Utah
Lease No. UTU-0579

Dear Ms. Jacobson:

The Application for Permit to Drill (APD) for the above referenced well received in this office on August 11, 2010, is being returned unapproved per a request to this office in an email message from you received on April 23, 2012. If you intend to drill at this location at a future date, a new Application for Permit to Drill must be submitted.

If you have any questions regarding APD processing, please contact Cindy Severson at (435) 781-4455.

Sincerely,

Jerry Kenczka
Assistant Field Manager
Lands & Mineral Resources

Enclosures

cc: UDOGM

RECEIVED
MAY 22 2012
DIV. OF OIL, GAS & MINING