

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL		1. WELL NAME and NUMBER Hancock 1-24-4-1
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>		3. FIELD OR WILDCAT UNDESIGNATED
4. TYPE OF WELL Oil Well Coalbed Methane Well: NO		5. UNIT or COMMUNITIZATION AGREEMENT NAME
6. NAME OF OPERATOR NEWFIELD PRODUCTION COMPANY		7. OPERATOR PHONE 435 646-4825
8. ADDRESS OF OPERATOR Rt 3 Box 3630 , Myton, UT, 84052		9. OPERATOR E-MAIL mcrozier@newfield.com
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) Fee	11. MINERAL OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>	12. SURFACE OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
13. NAME OF SURFACE OWNER (if box 12 = 'fee') Henderson Ranches LLC		14. SURFACE OWNER PHONE (if box 12 = 'fee')
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee') RR 3 Box 3671, Myton, UT 84052		16. SURFACE OWNER E-MAIL (if box 12 = 'fee')
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')	18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>	19. SLANT VERTICAL <input checked="" type="checkbox"/> DIRECTIONAL <input type="checkbox"/> HORIZONTAL <input type="checkbox"/>

20. LOCATION OF WELL	FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN
LOCATION AT SURFACE	771 FNL 477 FEL	NENE	24	4.0 S	1.0 W	U
Top of Uppermost Producing Zone	771 FNL 477 FEL	NENE	24	4.0 S	1.0 W	U
At Total Depth	771 FNL 477 FEL	NENE	24	4.0 S	1.0 W	U

21. COUNTY UINTAH	22. DISTANCE TO NEAREST LEASE LINE (Feet) 477	23. NUMBER OF ACRES IN DRILLING UNIT 40
	25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 1537	26. PROPOSED DEPTH MD: 6820 TVD: 6820
27. ELEVATION - GROUND LEVEL 4946	28. BOND NUMBER B001834	29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 43-7478

ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES

<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input checked="" type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)	<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER
<input type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)	<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP

NAME Mandie Crozier	TITLE Regulatory Tech	PHONE 435 646-4825
SIGNATURE	DATE 02/26/2010	EMAIL mcrozier@newfield.com
API NUMBER ASSIGNED 43047509680000	APPROVAL  Permit Manager	

Proposed Hole, Casing, and Cement

String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Prod	7.875	5.5	0	6820		
Pipe	Grade	Length	Weight			
	Grade J-55 LT&C	6820	15.5			

Proposed Hole, Casing, and Cement

String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Surf	12.25	8.625	0	400		
Pipe	Grade	Length	Weight			
	Grade J-55 ST&C	400	24.0			

**T4S, R1W,
U.S.B.&M.**

N89°53'W - 79.30 (G.L.O.)
S89°06'57"W
5240.57' (Meas. to C.C.)
5240.06' (Meas. to True)


Angle Point
Northwest Corner
Section 18
(1959 Galv. Cap)

NEWFIELD PRODUCTION COMPANY

WELL LOCATION, 1-24-4-1, LOCATED
AS SHOWN IN THE NE 1/4 NE 1/4 OF
SECTION 24, T4S, R1W, U.S.B.&M.
UINTAH COUNTY, UTAH.



Angle Point
Restablished Using
Single Proportion
Method (Not Set)

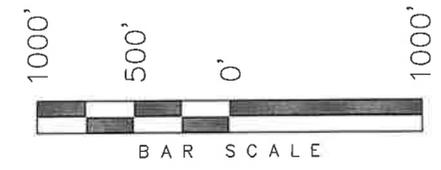

Note:
1. The Proposed Well head bears
N24°08'50"E 4977.63' from the
South 1/4 Corner of Section 24.

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS
PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS
MADE BY ME OR UNDER MY SUPERVISION AND THAT
THE SAME ARE TRUE AND CORRECT TO THE BEST
OF MY KNOWLEDGE AND BELIEF.

REGISTERED LAND SURVEYOR
STACY W. STEWART
REGISTRATION No. 189377
STATE OF UTAH

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV; Elevations are base on
LOCATION: an N.G.S. OPUS Correction.
LAT. 40°04'09.56" LONG. 110°00'43.28"
(Tristate Aluminum Cap) Elev. 5281.57'

1-24-4-1
(Surface Location) NAD 83
LATITUDE = 40° 07' 32.19"
LONGITUDE = 109° 56' 13.80"

TRI STATE LAND SURVEYING & CONSULTING
180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501

DATE SURVEYED: 01-18-10	SURVEYED BY: T.H.
DATE DRAWN: 02-01-10	DRAWN BY: M.W.
REVISED:	SCALE: 1" = 1000'

**MEMORANDUM
of
EASEMENT, RIGHT-OF-WAY
and
SURFACE USE AGREEMENT**

This Easement and Surface Use Agreement ("Agreement") is entered into this 22nd day of February 2010 by and between, **Henderson Ranches, LLC, Wayne and Moreen Henderson, Lance and Julie Henderson, Tommy Henderson, and Billie Henderson**, whose address is R.R. 3, Box 3671, Myton, Utah 84052 ("Surface Owner," whether one or more), and NEWFIELD PRODUCTION COMPANY, a Texas corporation ("NEWFIELD"), with offices at 1001 Seventeenth Street, Suite 2000, Denver, Colorado 80202, covering certain lands, (the "Lands") situated in Uintah County, Utah described as follows:

Township 4 South, Range 1 West

Section 24: NENE

(1-24-4-1, approx. 1.5 acres plus approx. 1,660ft of road and pipeline)

Uintah County, Utah

(limited to proposed roads, pipelines, & well pad only, as shown in attached plats)

For and in consideration of the sum of ten dollars (\$10.00), and other valuable consideration, the receipt and sufficiency of which are hereby acknowledged, the undersigned hereby agree to the terms and provisions set forth as follows:

1. Compensation for Well; Release of All Claims

NEWFIELD shall pay to Surface Owner the sum as set forth in and according to the terms of that certain Letter Agreement for Easement, Right-of Way and Surface Use by and between Surface Owner and NEWFIELD, dated February 22nd, 2010, as full payment and satisfaction for any and all detriment, depreciation, injury or damage of any nature to the Lands or growing crops thereon that may occur as a result of NEWFIELD's drilling or completion operations or its continuing activities for the production or transportation of oil, gas, or other hydrocarbons or products associated with the foregoing including, but not limited to, surface use, access, pipelines, gathering lines, pipeline interconnections, and any and all other reasonable or customary uses of land related to said operations or activities.

2. Grant of Right of Way and Easement

Surface Owner hereby grants, bargains, leases, assigns, and conveys to NEWFIELD an easement and right-of-way for the purpose of construction, using and maintaining access roads, locations for surface equipment and subsurface gathering lines for each well drilled upon the Lands, pipelines, and pipeline interconnections for two years from date of this agreement and so long thereafter as NEWFIELD's oil and gas leases remain in effect.

This Agreement shall be binding upon the respective heirs, executors, administrators, successors, and assigns of the undersigned.

These Parties hereto have executed this document effective as of the day first above written.

NEWFIELD PRODUCTION COMPANY

By: _____
Daniel W. Shewmake, Vice President-Development

SURFACE OWNER

By: Wayne Henderson
Wayne Henderson, Henderson Ranches. LLC

By: Wayne Henderson
Wayne Henderson

By: Lance Henderson
Lance Henderson

By: Tommy Henderson
Tommy Henderson

By: Moreen Henderson
Moreen Henderson

By: Julie Henderson
Julie Henderson

By: Billie Henderson
Billie Henderson

STATE OF UTAH)
)ss
COUNTY OF Duchesne)

This instrument was acknowledged before me this 24th day of February, 2010 by **Wayne Henderson and Moreen Henderson**

Witness my hand and official seal.

My commission expires 9/8/2013

[Signature]
Notary Public


STATE OF UTAH)
)ss
COUNTY OF Duchesne)

This instrument was acknowledged before me this 24th day of February, 2010 by **Lance Henderson and Julie Henderson**

Witness my hand and official seal.

My commission expires 9/8/2013

[Signature]
Notary Public


STATE OF UTAH)
)ss
COUNTY OF Duchesne)

This instrument was acknowledged before me this 24th day of February, 2010 by **Tommy Henderson and Billie Henderson**

Witness my hand and official seal.

My commission expires 9/8/2013

[Signature]
Notary Public


STATE OF COLORADO)
)ss
COUNTY OF Denver)

This instrument was acknowledged before me this _____, 2010 by **Daniel W. Shewmake-Development, as Vice President of Newfield Production Company**, a Texas corporation, on behalf of the corporation.

Witness my hand and official seal.

Notary Public

My commission expires _____

NEWFIELD PRODUCTION COMPANY
HANCOCK 1-24-4-1
NE/NE SECTION 24, T4S, R1W
UINTAH COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0 – 2,040'
Green River	2,040'
Wasatch	6,820'

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation (Oil) 2,040' – 6,820'

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO ₃) (mg/l)
Dissolved Bicarbonate (NaHCO ₃) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO ₄) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. **PROPOSED CASING PROGRAM**

a. **Casing Design: Hancock 1-24-4-1**

Size	Interval		Weight	Grade	Coupling	Design Factors		
	Top	Bottom				Burst	Collapse	Tension
Surface casing 8-5/8"	0'	400'	24.0	J-55	STC	2,950	1,370	244,000
						13.15	10.77	25.42
Prod casing 5-1/2"	0'	6,820'	15.5	J-55	LTC	4,810	4,040	217,000
						2.22	1.86	2.05

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe = 13.0 ppg
 Pore pressure at surface casing shoe = 8.33 ppg
 Pore pressure at prod casing shoe = 8.33 ppg
 Gas gradient = 0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. **Cementing Design: Hancock 1-24-4-1**

Job	Fill	Description	Sacks	OH Excess*	Weight (ppg)	Yield (ft ³ /sk)
			ft ³			
Surface casing	400'	Class G w/ 2% CaCl	183	30%	15.8	1.17
			215			
Prod casing Lead	4,820'	Prem Lite II w/ 10% gel + 3% KCl	333	30%	11.0	3.26
			1086			
Prod casing Tail	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363	30%	14.3	1.24
			451			

- *Actual volume pumped will be 15% over the caliper log
- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
- Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to ±350 feet will be drilled with an air/mist system. The air rig is equipped with a 6 ½" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about ±350 feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 400' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBDT to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated

bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the second quarter of 2010, and take approximately seven (7) days from spud to rig release.

2-M SYSTEM

Blowout Prevention Equipment Systems


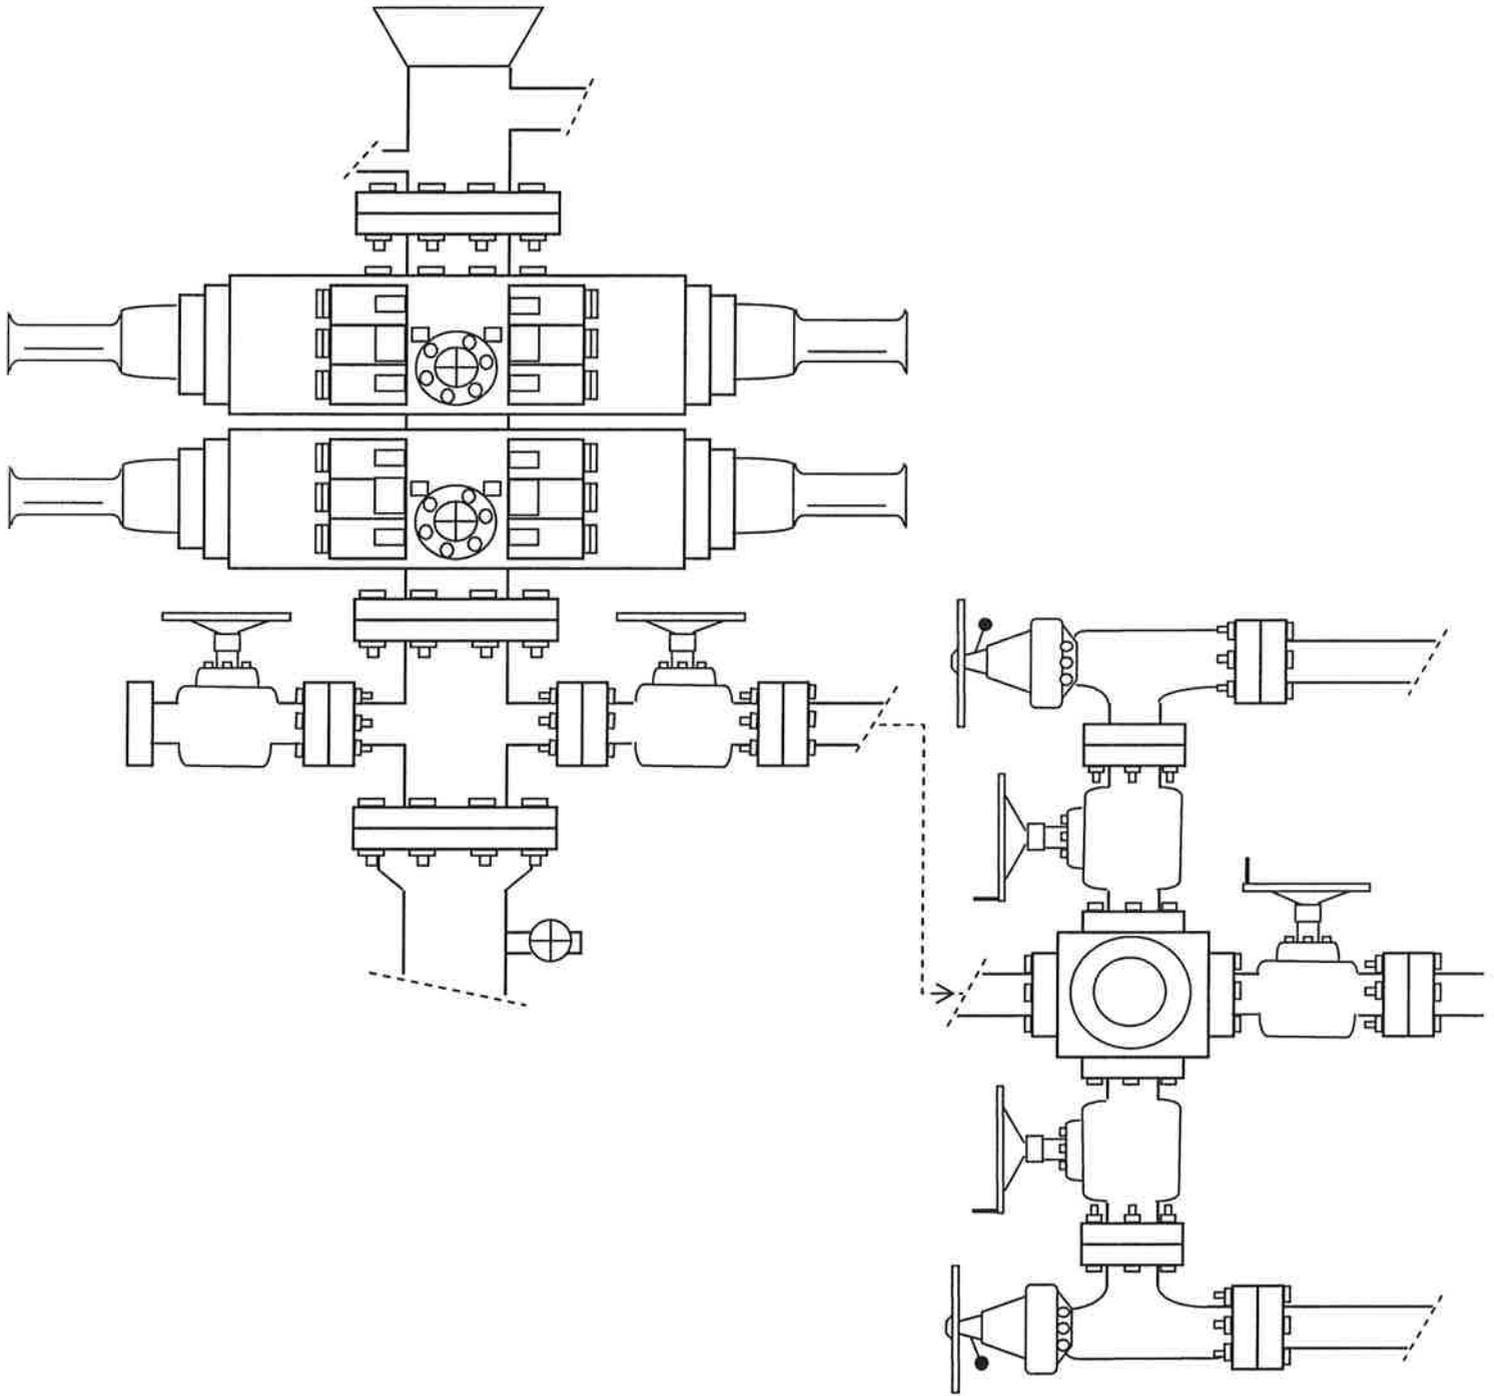


EXHIBIT C



NEWFIELD
Exploration Company

1-24-4-1
SEC. 24, T4S, R1W, U.S.B.&M.

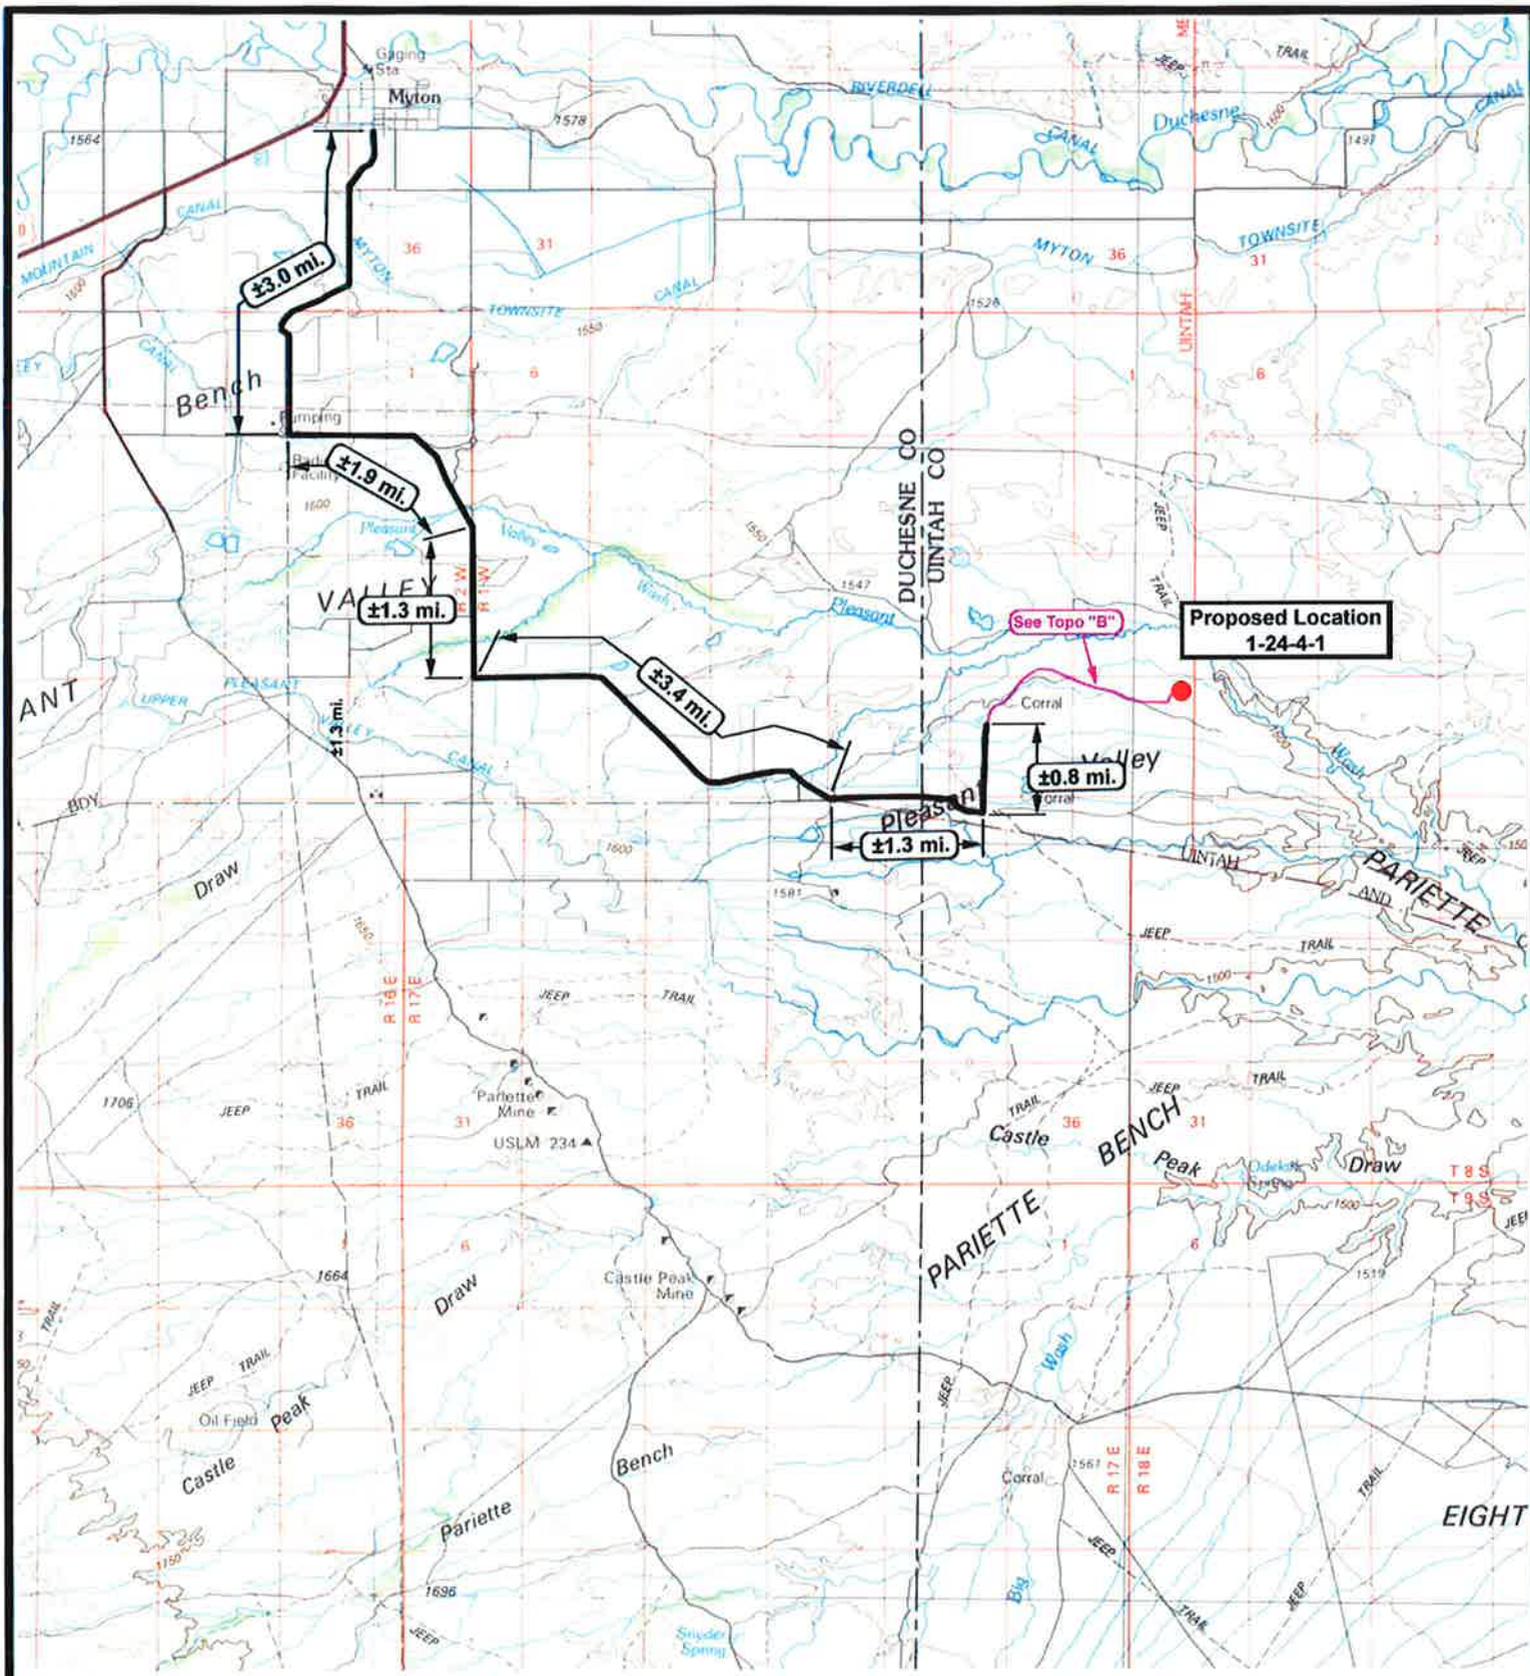


Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1 : 100,000
DRAWN BY: mw
DATE: 02-02-2010

Legend

- Existing Road
- Proposed Access

TOPOGRAPHIC MAP
"A"

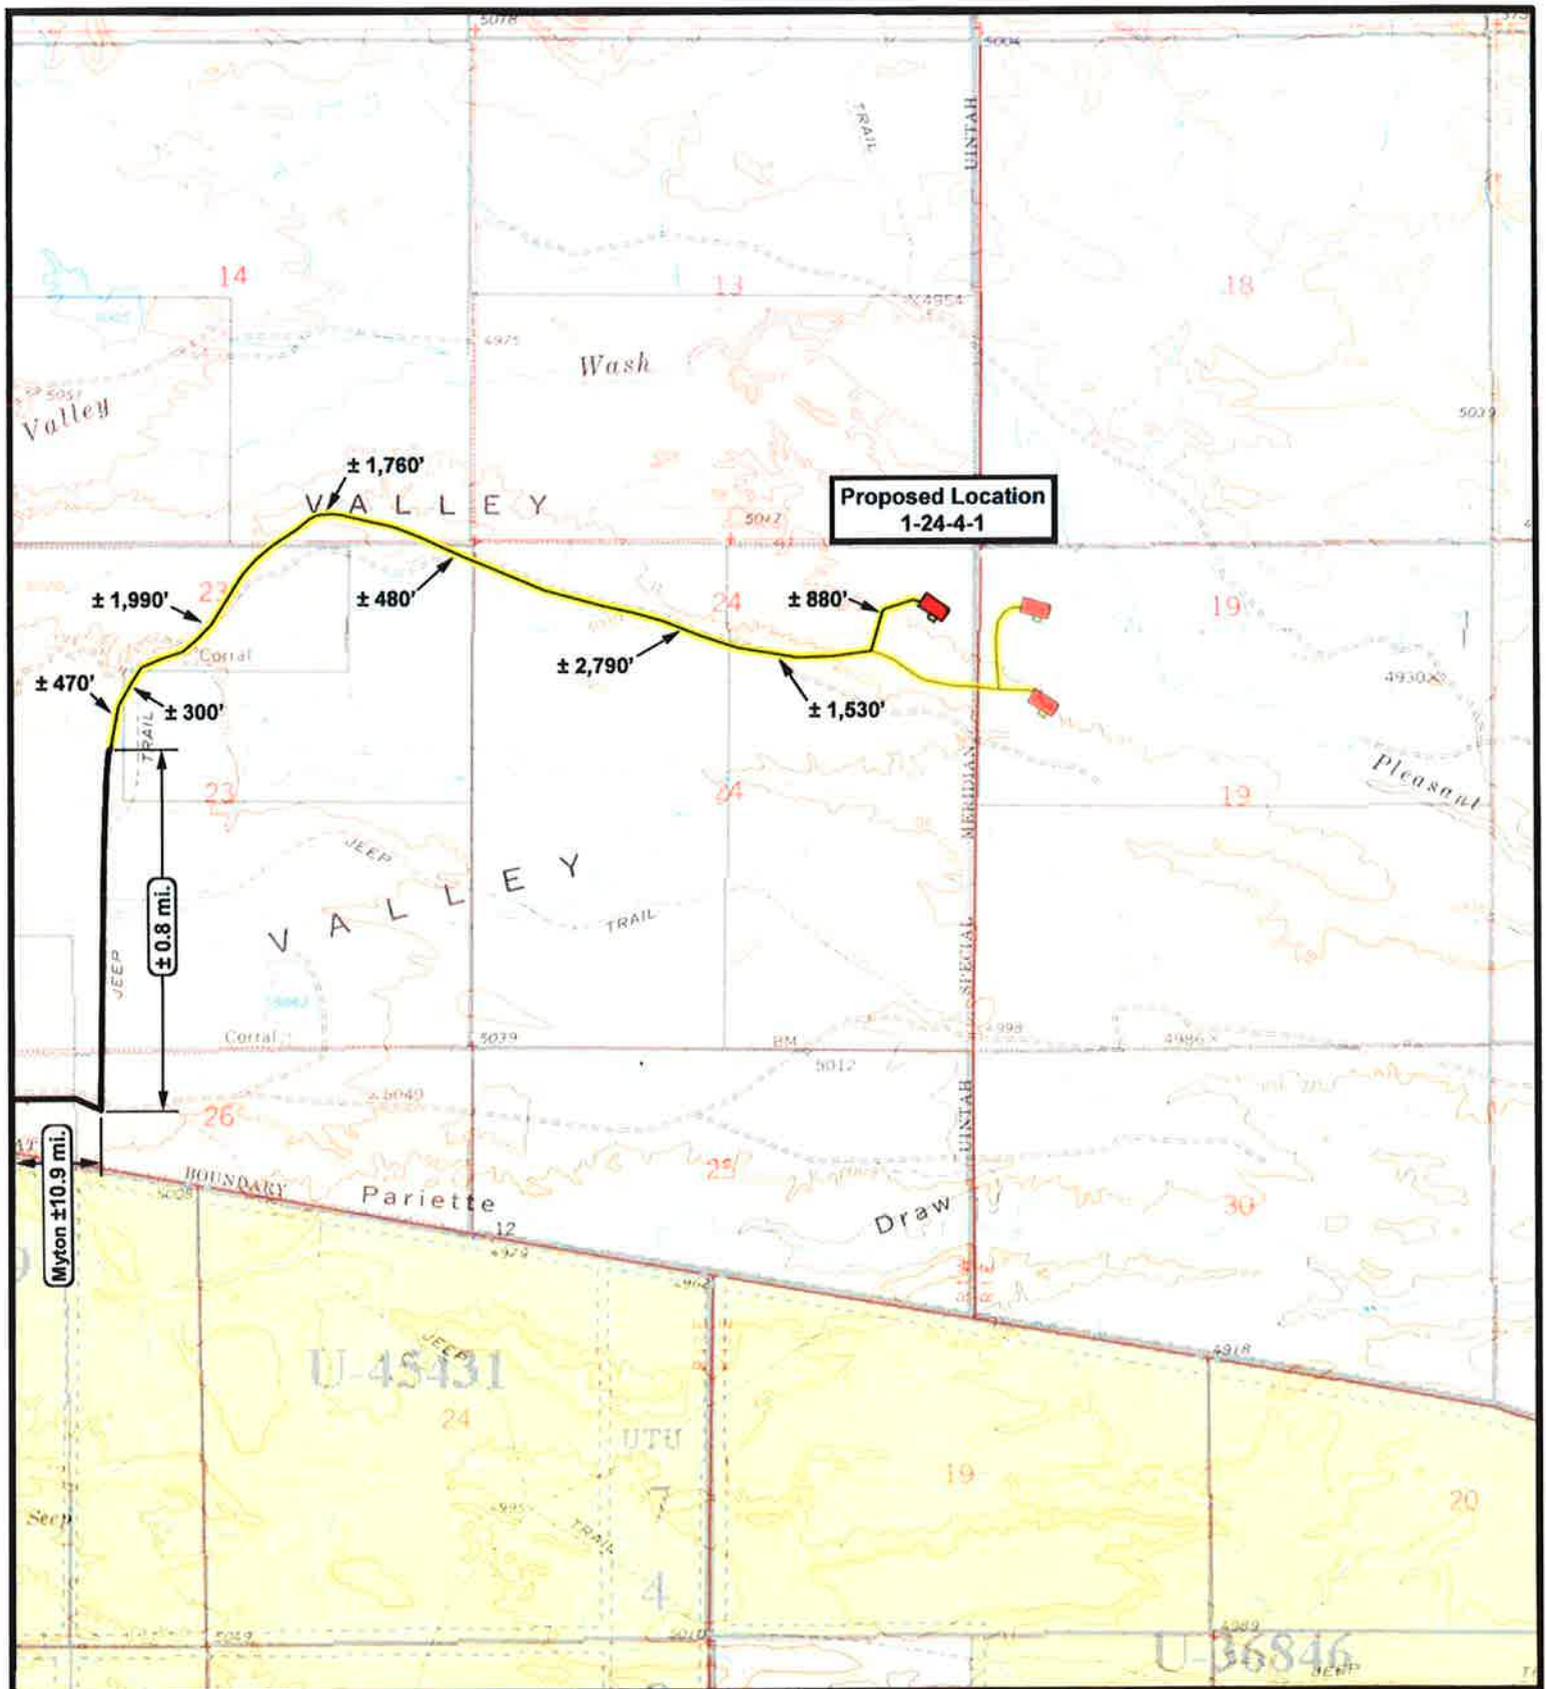

 **NEWFIELD**
Exploration Company

1-24-4-1
SEC. 24, T4S, R1W, U.S.B.&M.





Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'
DRAWN BY: mw
DATE: 02-02-2010

Legend

-  Existing Road
-  Proposed Access

TOPOGRAPHIC MAP
"B"

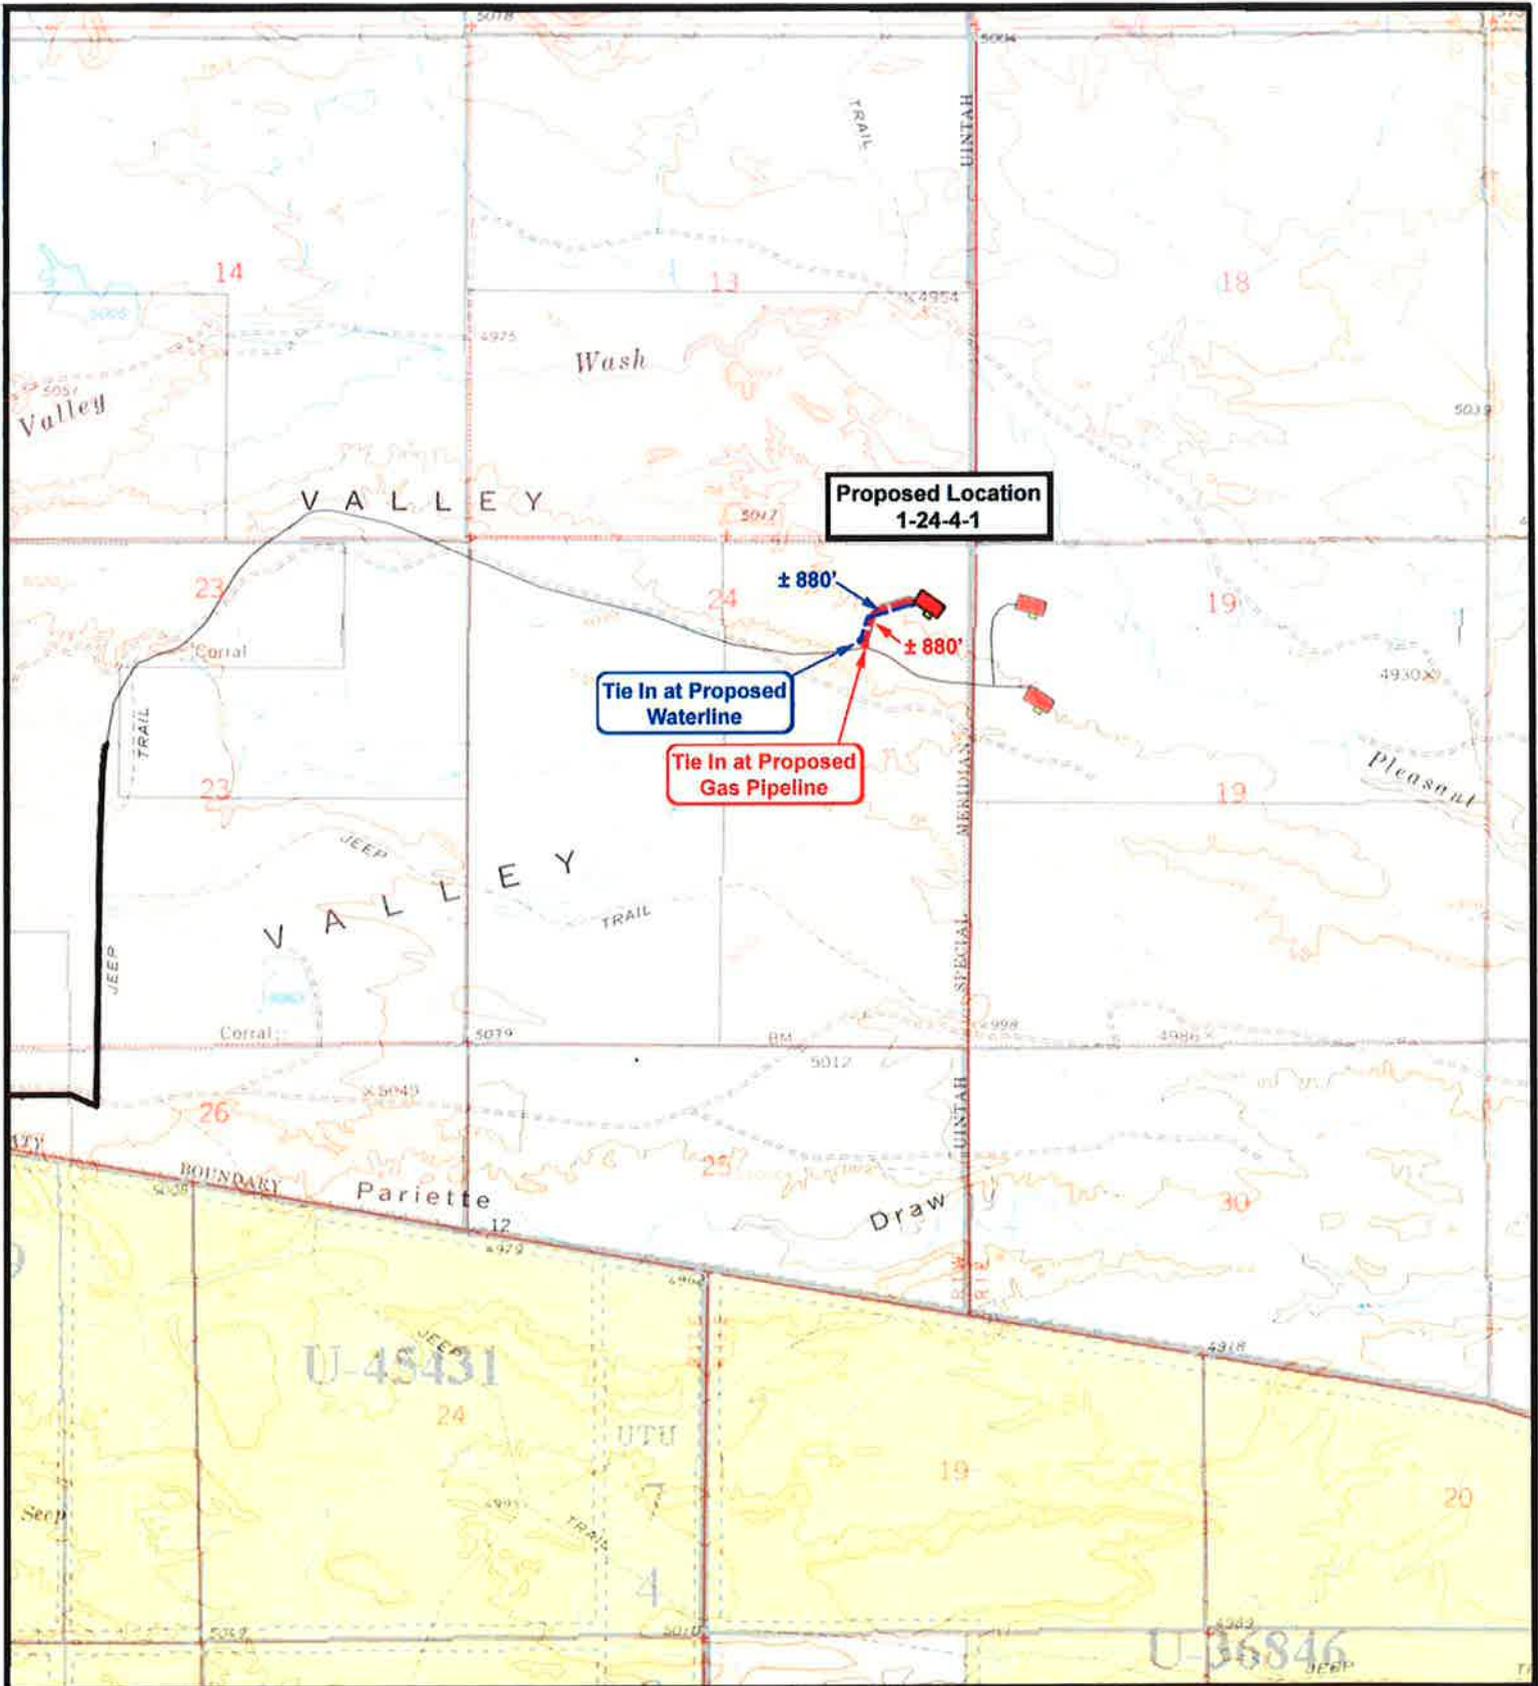


NEWFIELD
Exploration Company

1-24-4-1
SEC. 24, T4S, R1W, U.S.B.&M.




Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078


SCALE: 1" = 2,000'
DRAWN BY: mw
DATE: 02-02-2010


Legend

-  Roads
-  Proposed Gas Line
-  Proposed Water Line

TOPOGRAPHIC MAP

"C"

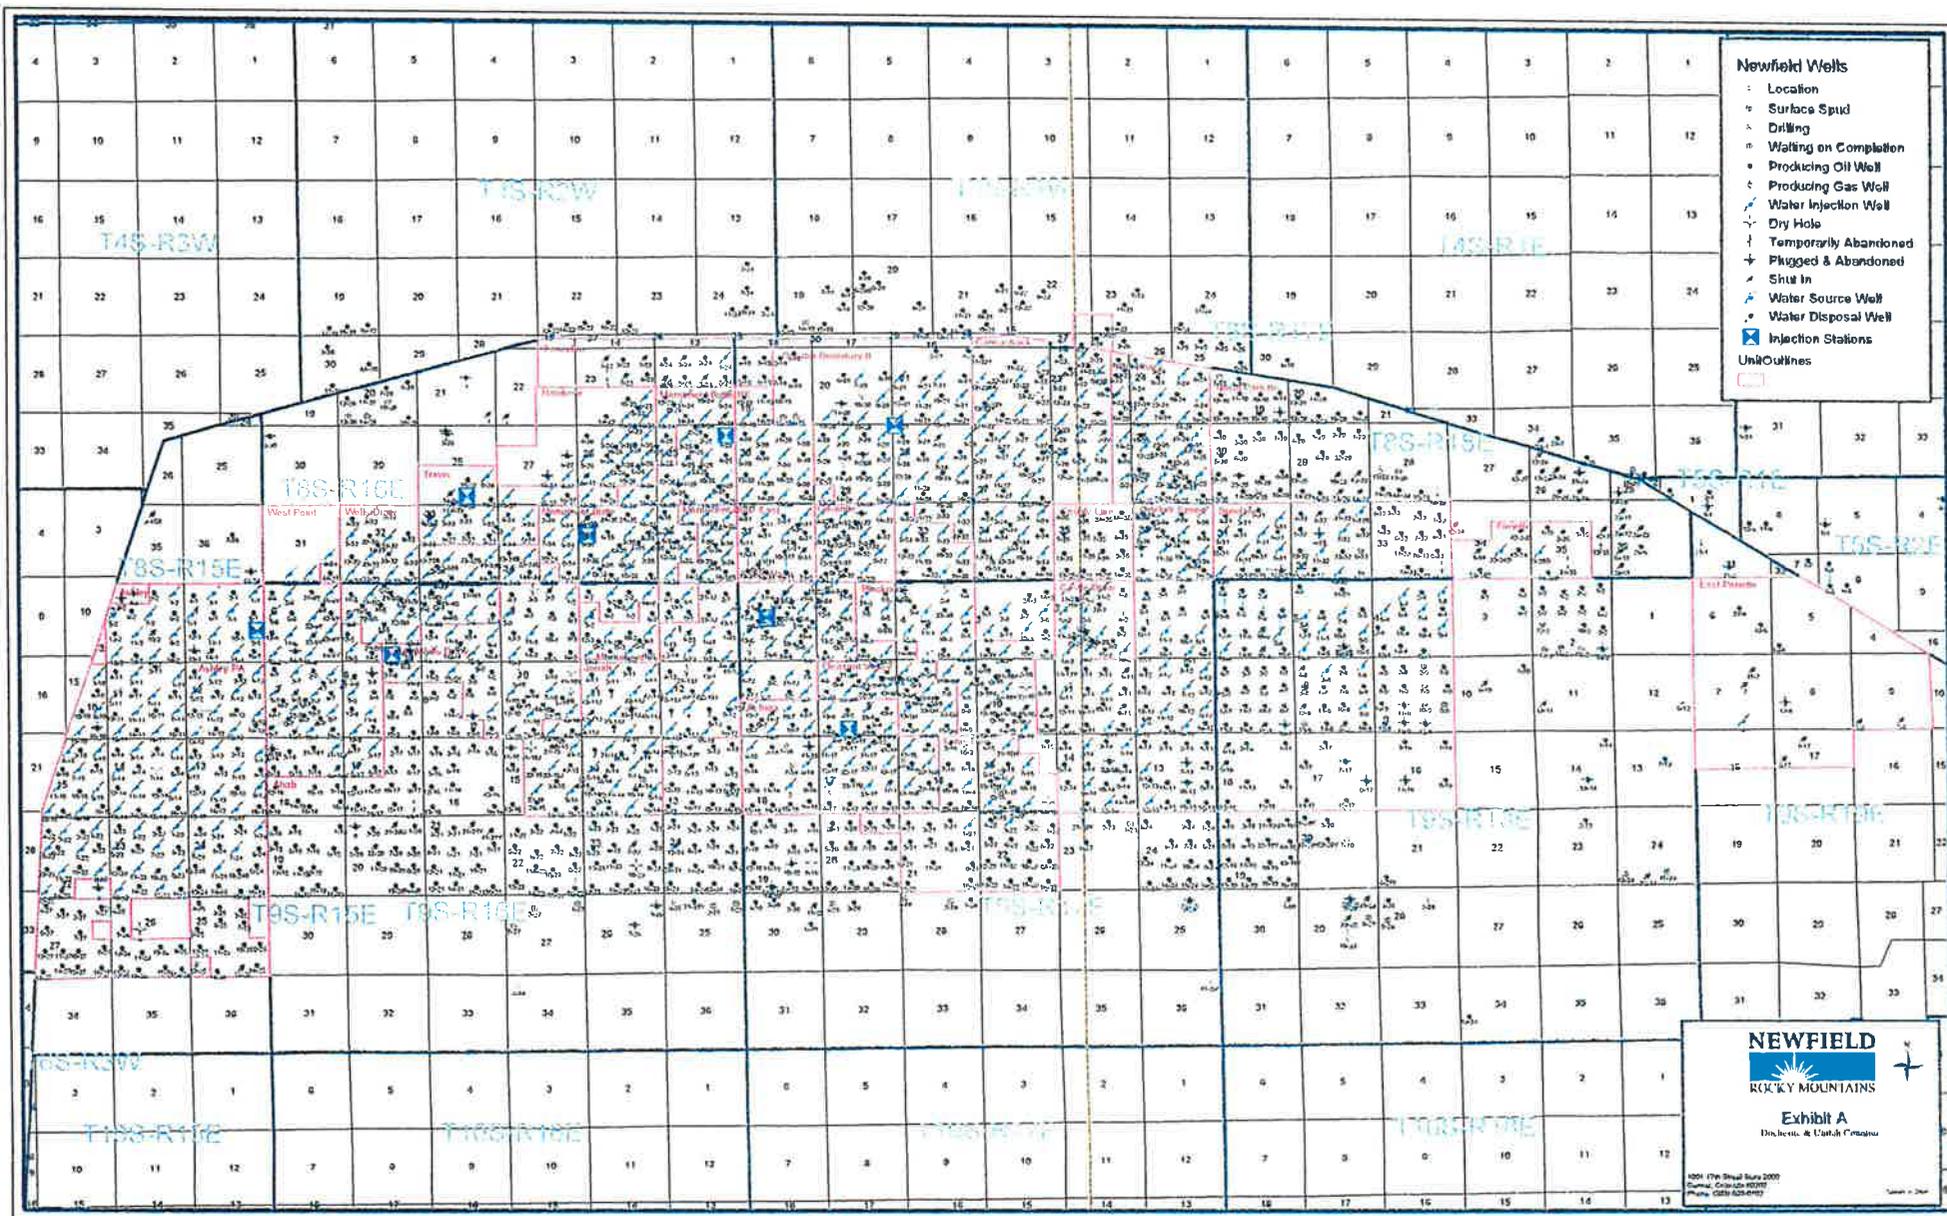

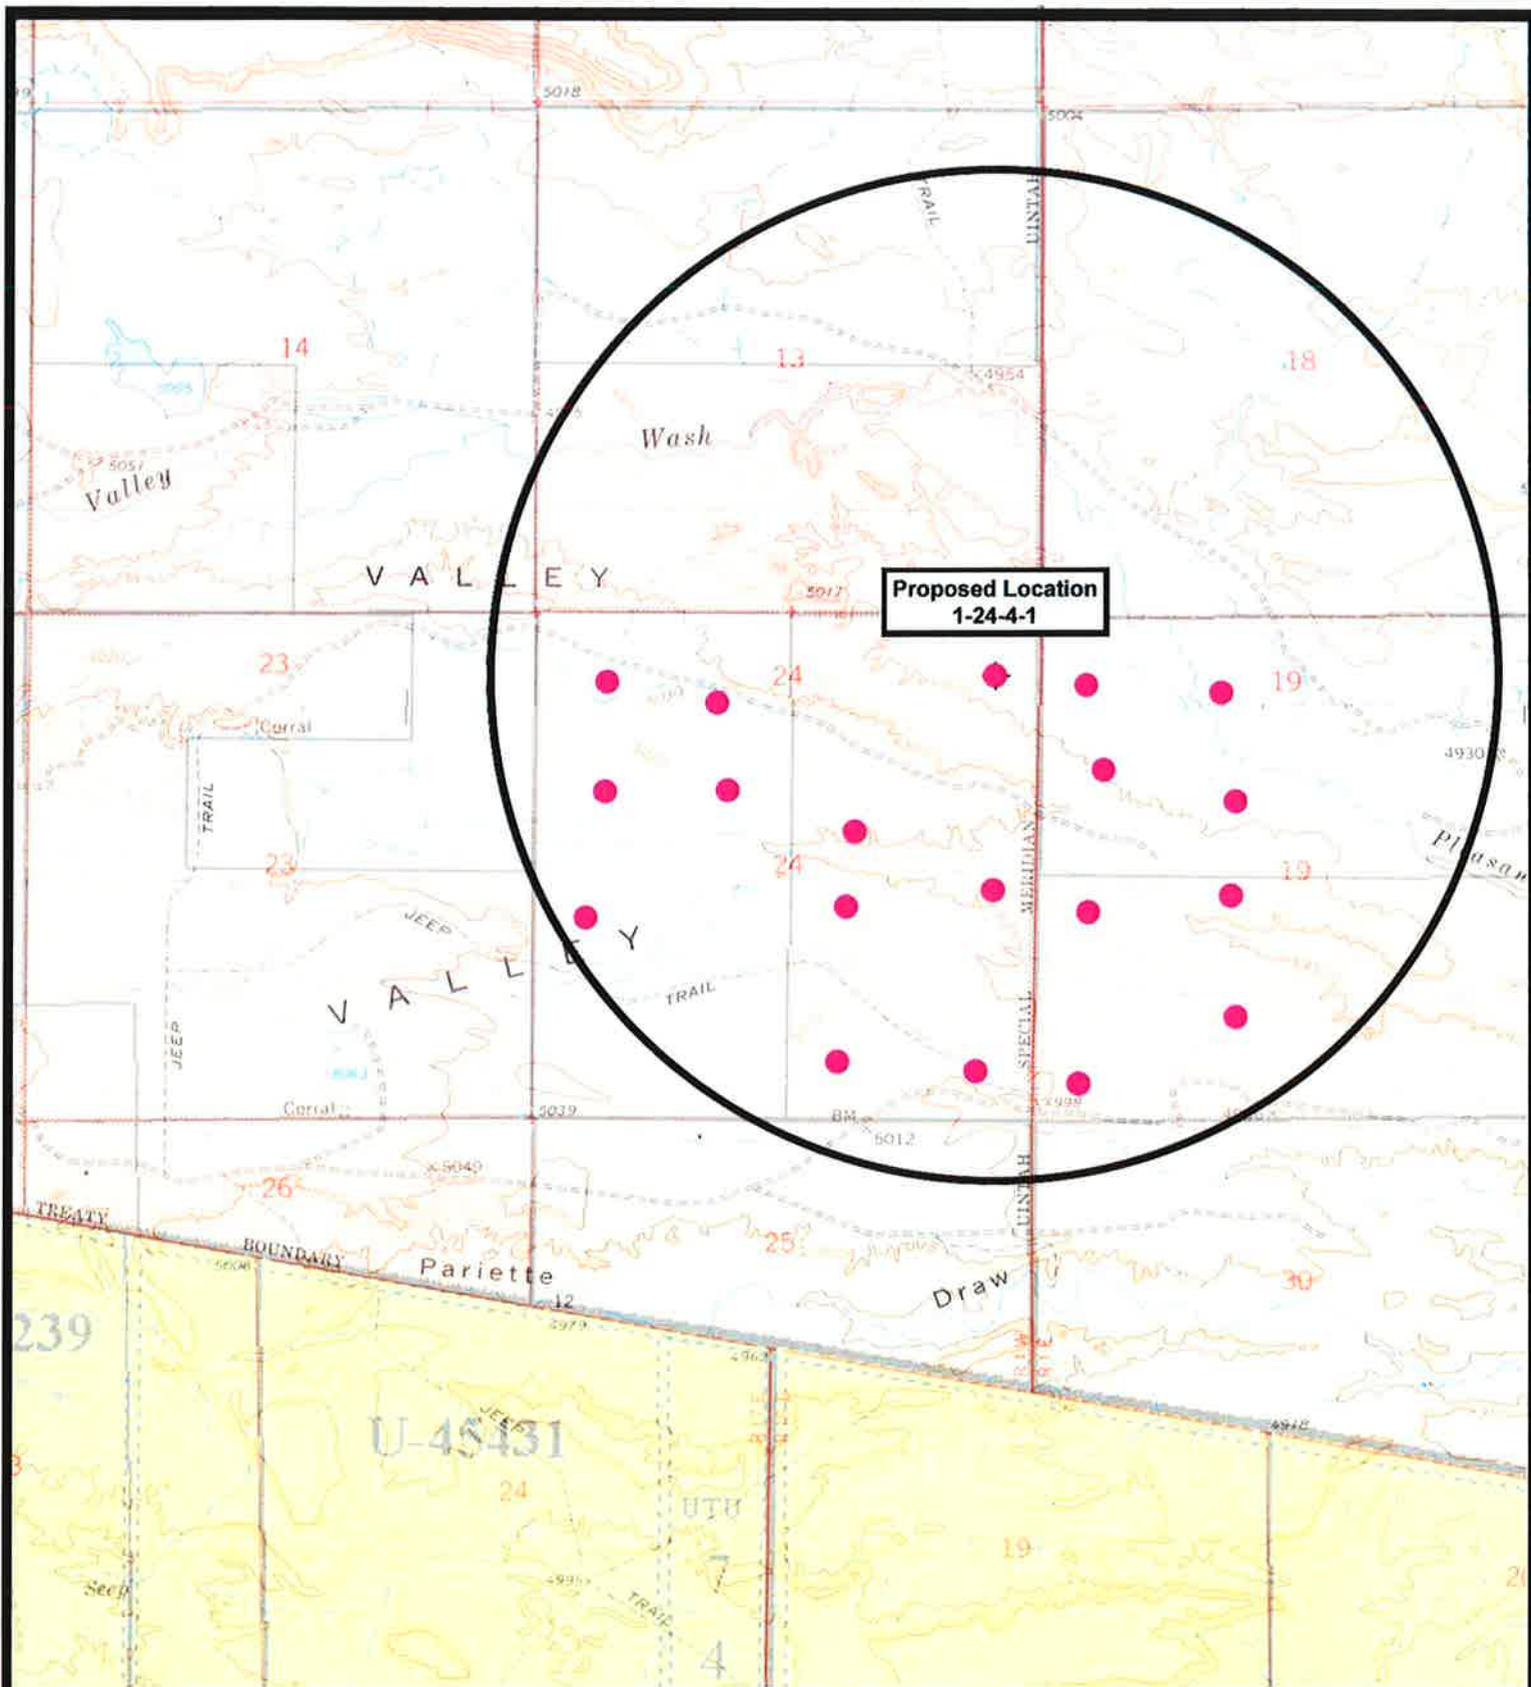

**Proposed Location
1-24-4-1**



NEWFIELD
Exploration Company



Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

Legend

- Location
- One-Mile Radius

1-24-4-1
SEC. 24, T4S, R1W, U.S.B.&M.

SCALE: 1" = 2,000'
DRAWN BY: mw
DATE: 02-02-2010

Exhibit "B"

NEWFIELD PRODUCTION COMPANY
HANCOCK 1-24-4-1
NE/NE SECTION 24, T4S, R1W
UINTAH COUNTY, UTAH

THIRTEEN POINT SURFACE PROGRAM

1. **EXISTING ROADS**

See attached **Topographic Map "A"**

To reach Newfield Production Company well location site Hancock 1-24-4-1 located in the NE¼ NE¼ Section 24, T4S, R1W, S.L.B. & M., Uintah County, Utah:

Proceed in a southerly direction out of Myton, approximately 3.0 miles to it's junction with an existing road to the east; proceed in a southeasterly direction approximately 3.2 miles to it's junction with an existing road to the east; proceed in a southeasterly direction approximately 3.4 miles to it's junction with an existing road to the east; proceed easterly approximately 1.3 miles to it's junction with an existing road to the north; proceed northerly approximately 0.8 miles to it's junction with the beginning of the proposed access road to the north; proceed northeasterly along the proposed access road approximately 10,200' to the proposed well location.

The highways mentioned in the foregoing paragraph are bituminous surfaced roads to the point where Highway 216 exists to the South, thereafter the roads are constructed with existing materials and gravel. The highways are maintained by Utah State road crews. All other roads are maintained by County crews.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal.

2. **PLANNED ACCESS ROAD**

Approximately 10,200' of access road is proposed. See attached **Topographic Map "B"**.

The proposed access road will be an 18' crown road (9' either side of the centerline) with drainage ditches along either side of the proposed road whether it is deemed necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area. The maximum grade will be less than 8%.

There will be no culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. **LOCATION OF EXISTING WELLS**

Refer to **EXHIBIT B**.

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck for drilling purposes from the following water sources:

Johnson Water District
Water Right: 43-7478

Neil Moon Pond
Water Right: 43-11787

Maurice Harvey Pond
Water Right: 47-1358

Newfield Collector Well
Water Right: 41-3530 (A30414DV, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000

PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. A 16 mil liner with felt will be required. Newfield requests approval that a flare pit be constructed and utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

Immediately upon first production, all produced water will be confined to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E) or at State of Utah approved surface disposal facilities.

8. **ANCILLARY FACILITIES:**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT:**

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

10. **PLANS FOR RESTORATION OF SURFACE:**

- a) **Producing Location**

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

b) **Dry Hole Abandoned Location**

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP:** Henderson Ranches LLC.
See attached Memorandum of Surface Use Agreement and Easement ROW.

12. **OTHER ADDITIONAL INFORMATION:**

Newfield Production Company requests 880' of disturbed area be granted for construction of the proposed gas lines. It is proposed that the disturbed area will temporarily be 50' wide to allow for construction of a 6" gas gathering line, and a 3" poly fuel gas line, with a permanent width of 30' upon completion of the proposed gas lines. The construction phase of the proposed gas lines will last approximately (5) days. Both proposed lines will tie in to the existing pipeline infrastructure. **Refer to Topographic Map "C."**

Newfield Production Company requests 880' of disturbed area be granted to allow for construction of the proposed water lines. It is proposed that the disturbed area will temporarily be 50' wide to allow for construction of a buried 3" steel water injection line and a buried 3" poly water return line and 30' wide upon completion of the proposed water lines. Both proposed lines will tie in to the existing pipeline infrastructure. **Refer to Topographic Map "C."** In the event that the proposed well is converted to a water injection well, a separate injection permit will be applied for through the proper agencies.

- a) Newfield Production Company is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, Newfield is to immediately stop work that might further disturb such materials and contact the Authorized Officer.
- b) Newfield Production will control noxious weeds along rights-of-way for roads, pipelines, well sites or other applicable facilities. On State administered land it is required that a Pesticide Use Proposal shall be submitted and given approval prior to the application of herbicides or other possible hazardous chemicals.
- c) Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on State Lands after the conclusion of drilling operations or at any other time without State authorization. However, if State authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

The Archaeological and Paleontological Report Waiver is attached.

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the Hancock 1-24-4-1, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the Hancock 1-24-4-1 Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

The State office shall be notified upon site completion prior to moving on the drilling rig.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

Representative


Name: Tim Eaton
Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification

Please be advised that Newfield Production Company is considered to be the operator of well #1-24-4-1, NE/NE Section 24, T4S, R1W, Uintah County, Utah and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by Bond #B001834.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

Date 2/26/10





Mandie Crozier
Regulatory Specialist
Newfield Production Company

NEWFIELD PRODUCTION COMPANY

1-24-4-1

Section 24, T4S, R1W, U.S.B.&M.

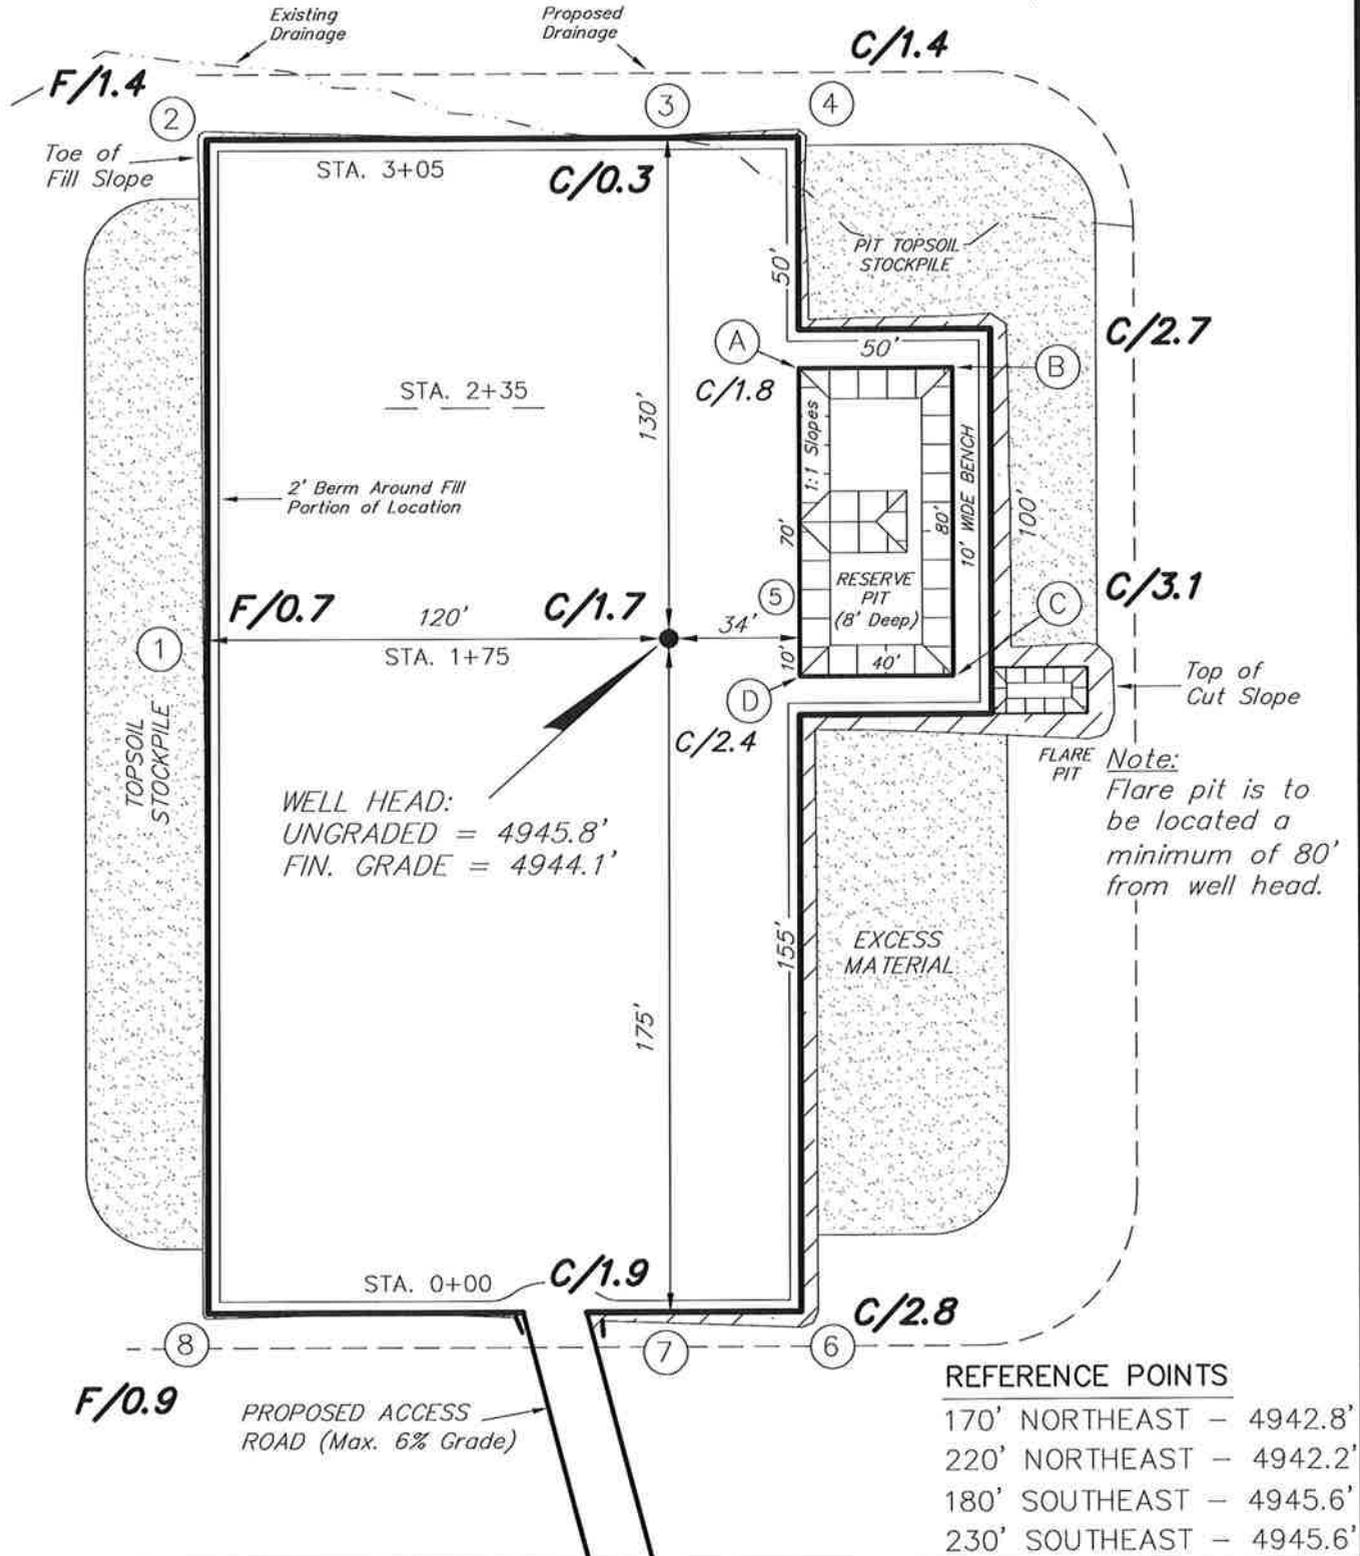




SURVEYED BY: T.H.	DATE SURVEYED: 01-18-10
DRAWN BY: M.W.	DATE DRAWN: 02-01-10
SCALE: 1" = 50'	REVISED:

Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD PRODUCTION COMPANY

CROSS SECTIONS

1-24-4-1

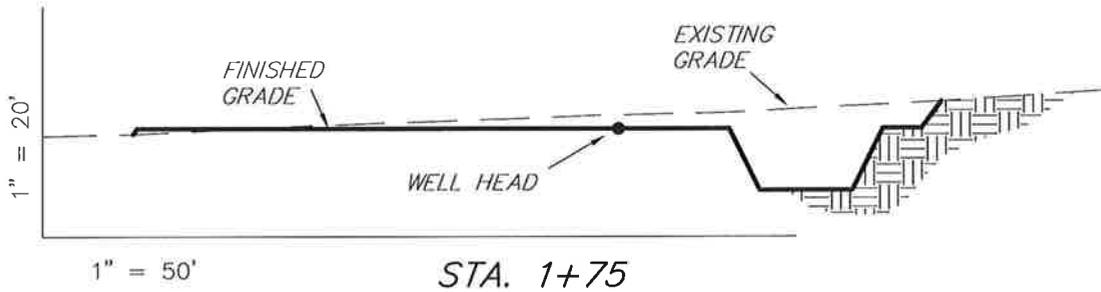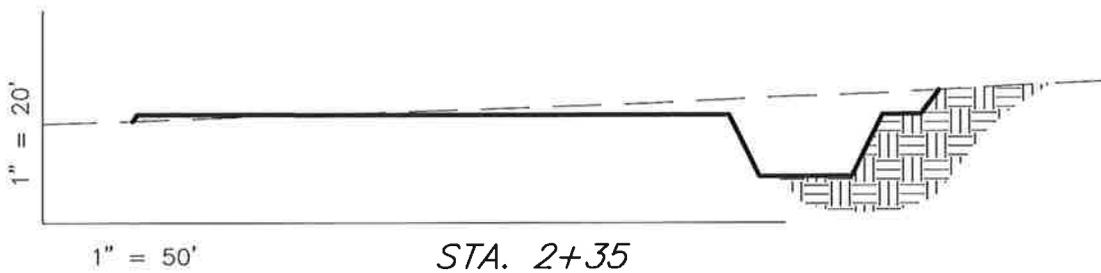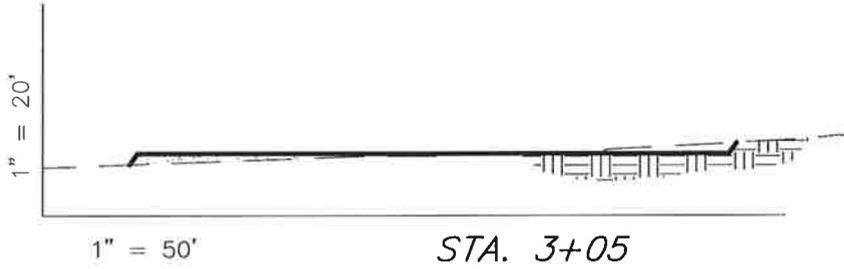

NOTE:
UNLESS OTHERWISE
NOTED ALL CUT/FILL
SLOPES ARE AT 1.5:1

ESTIMATED EARTHWORK QUANTITIES
(No Shrink or swell adjustments have been used)
(Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	920	920	Topsoil is not included in Pad Cut	0
PIT	640	0		640
TOTALS	1,560	920	1,020	640



SURVEYED BY: T.H.	DATE SURVEYED: 01-18-10	
DRAWN BY: M.W.	DATE DRAWN: 02-01-10	
SCALE: 1" = 50'	REVISED:	

Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD PRODUCTION COMPANY

TYPICAL RIG LAYOUT

1-24-4-1

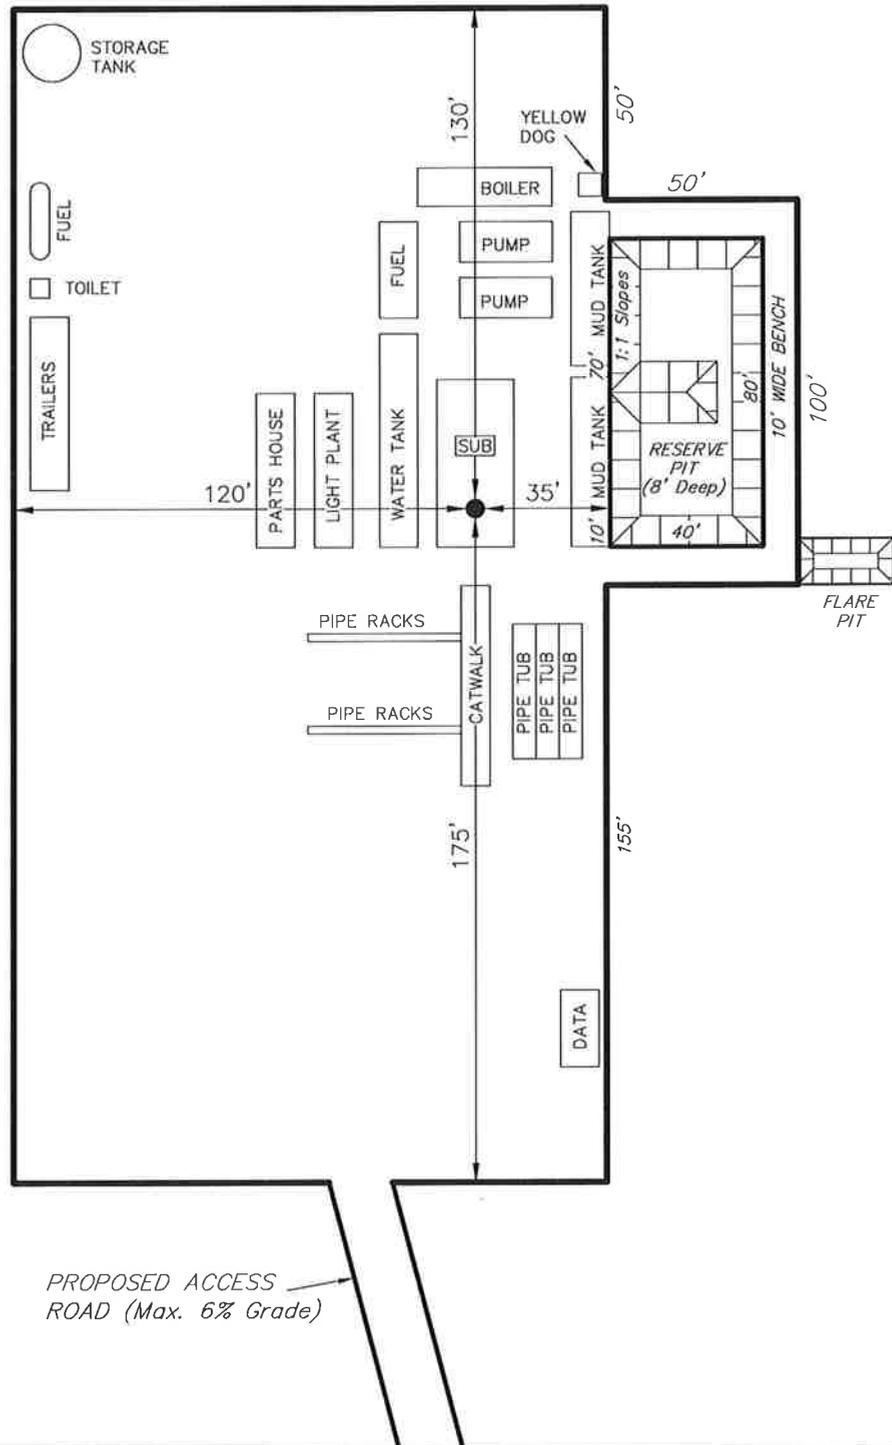

SURVEYED BY: T.H.	DATE SURVEYED: 01-18-10
DRAWN BY: M.W.	DATE DRAWN: 02-01-10
SCALE: 1" = 50'	REVISED:

Tri State (435) 781-2501
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078


Newfield Production Company Proposed Site Facility Diagram

Hancock 1-24-4-1

NE/NE Sec. 24, T4S, R1W

Uintah County, Utah

FEE

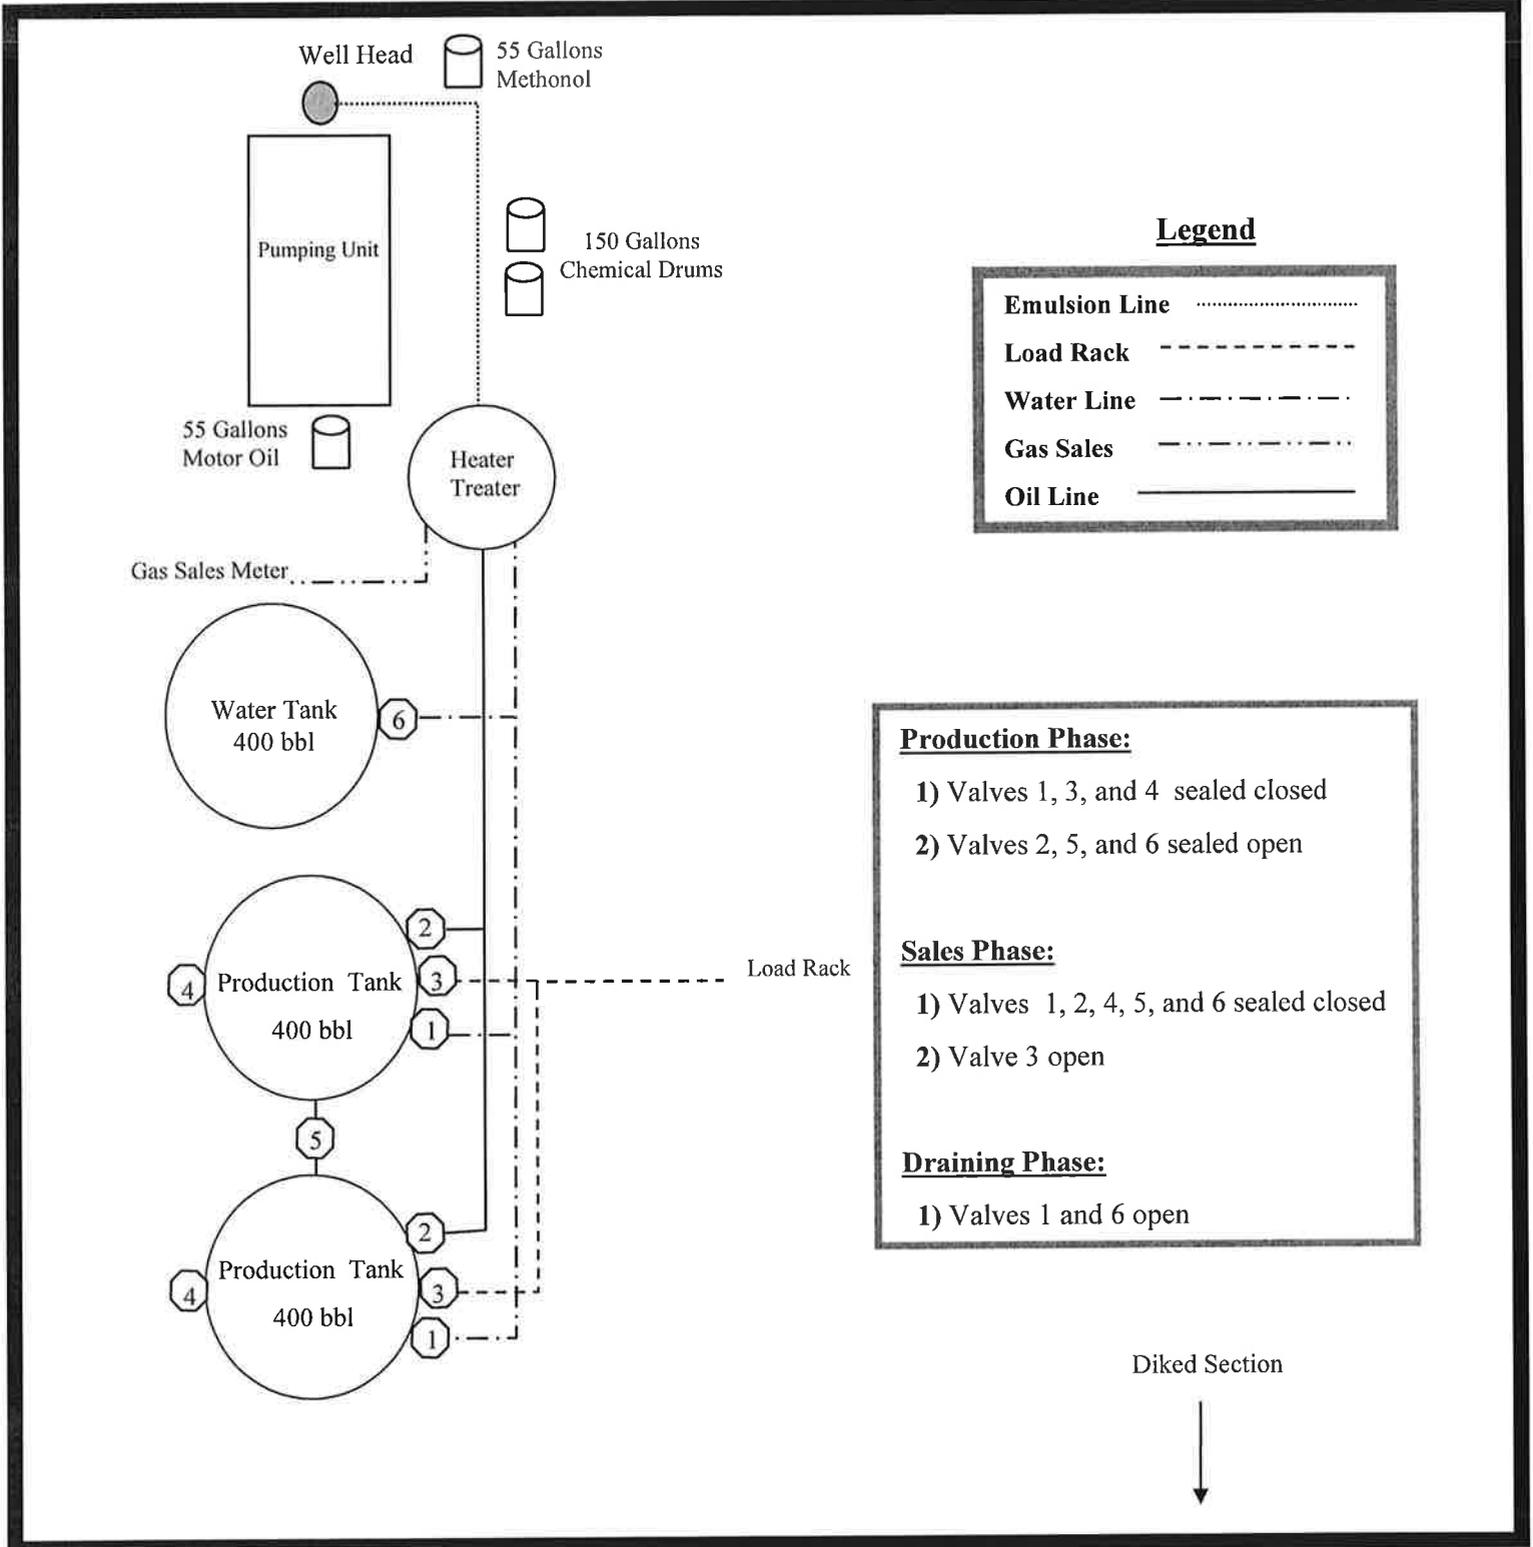

Legend

Emulsion Line
Load Rack	- - - - -
Water Line	- . - . - .
Gas Sales	- . - . - .
Oil Line	—————

Production Phase:

- 1) Valves 1, 3, and 4 sealed closed
- 2) Valves 2, 5, and 6 sealed open

Sales Phase:

- 1) Valves 1, 2, 4, 5, and 6 sealed closed
- 2) Valve 3 open

Draining Phase:

- 1) Valves 1 and 6 open

EXHIBIT D

Township 4 South, Range 1 West
Section 24: NENE (1-24-4-1)

Uintah County, Utah

ARCHAEOLOGICAL & PALEOTOLOGICAL REPORT WAIVER

For the above referenced location only; Henderson Ranches, LLC, the private surface owner. (Having a Surface Owner Agreement with Newfield Production Company)

Wayne Henderson, representing this entity does agree to waive the request from the State of Utah and Bureau of Land Management for an Archaeological/Cultural and Paleotological Resource Survey for any wells covered by the Surface Use Agreement dated 2/22/2010 between the above said private land owner and Newfield Production. This waiver hereby releases Newfield Production Company from this request.




Wayne Henderson Date
Private Surface Owner


Dave Allred Date
Newfield Production Company

API Number: 4304750968
Well Name: Hancock 1-24-4-1
Township 04.0 S Range 01.0 W Section 24
Meridian: UBM
 Operator: NEWFIELD PRODUCTION COMPANY

Map Prepared:
 Map Produced by Diana Mason

Units	Wells Query
STATUS	Status
ACTIVE	-call other values-
EXPLORATORY	APD - Approved Permit
GAS STORAGE	DRL - Spudded (Drilling Commenced)
NF PP OIL	GW - Gas Injection
NF SECONDARY	GS - Gas Storage
PI OIL	LA - Location Abandoned
PP GAS	LOC - New Location
PP GEOTHERMAL	OPS - Operation Suspended
PP OIL	PA - Plugged Abandoned
SECONDARY	PGW - Producing Gas Well
TERMINATED	POW - Producing Oil Well
Fields	RET - Returned APD
Sections	SGW - Shut-in Gas Well
Township	SOW - Shut-in Oil Well
	TA - Temp. Abandoned
	TW - Test Well
	WDW - Water Disposal
	WW - Water Injection Well
	WSW - Water Supply Well

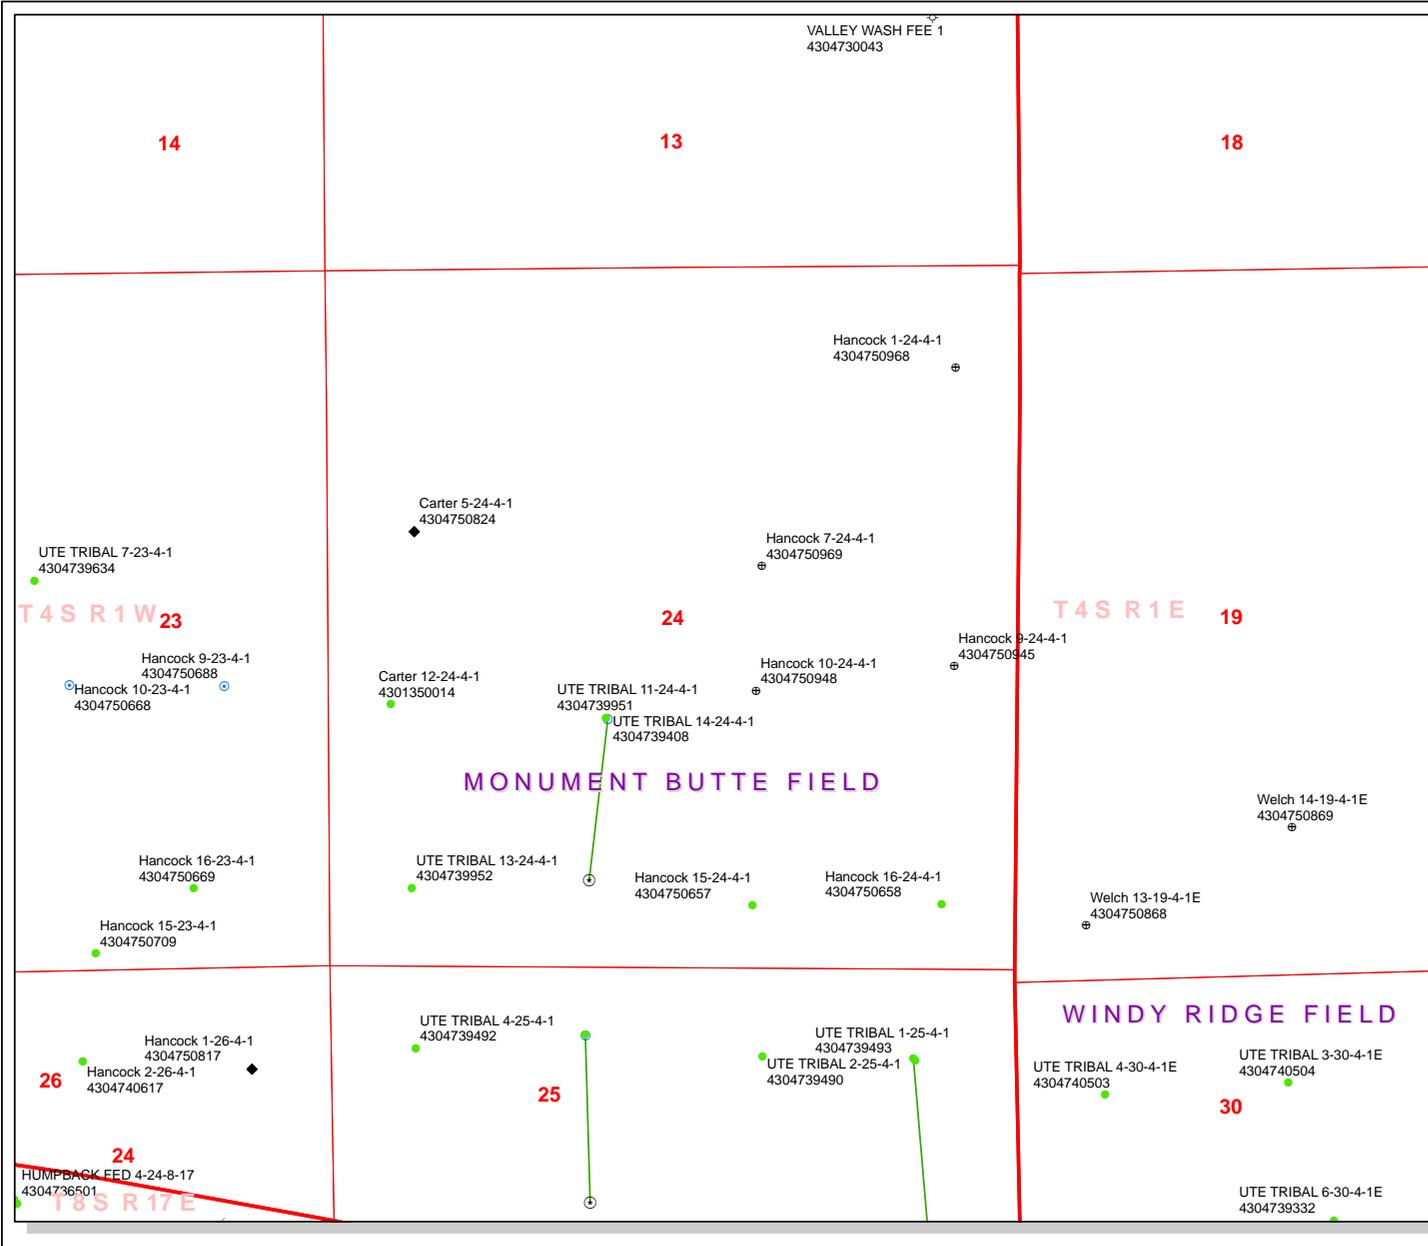

Well Name	NEWFIELD PRODUCTION COMPANY Hancock 1-24-4-1 43047509680000		
String	Surf	Prod	
Casing Size(")	8.625	5.500	
Setting Depth (TVD)	400	6820	
Previous Shoe Setting Depth (TVD)	0	400	
Max Mud Weight (ppg)	8.3	8.3	
BOPE Proposed (psi)	500	2000	
Casing Internal Yield (psi)	2950	4810	
Operators Max Anticipated Pressure (psi)	2953	8.3	

Calculations	Surf String	8.625	"
Max BHP (psi)	$.052 * \text{Setting Depth} * \text{MW} =$	173	
			BOPE Adequate For Drilling And Setting Casing at Depth?
MASP (Gas) (psi)	$\text{Max BHP} - (0.12 * \text{Setting Depth}) =$	125	YES Air drill
MASP (Gas/Mud) (psi)	$\text{Max BHP} - (0.22 * \text{Setting Depth}) =$	85	YES OK
			*Can Full Expected Pressure Be Held At Previous Shoe?
Pressure At Previous Shoe	$\text{Max BHP} - .22 * (\text{Setting Depth} - \text{Previous Shoe Depth}) =$	85	NO OK
Required Casing/BOPE Test Pressure=		400	psi
*Max Pressure Allowed @ Previous Casing Shoe=		0	psi *Assumes 1psi/ft frac gradient


Calculations	Prod String	5.500	"
Max BHP (psi)	$.052 * \text{Setting Depth} * \text{MW} =$	2944	
			BOPE Adequate For Drilling And Setting Casing at Depth?
MASP (Gas) (psi)	$\text{Max BHP} - (0.12 * \text{Setting Depth}) =$	2126	NO
MASP (Gas/Mud) (psi)	$\text{Max BHP} - (0.22 * \text{Setting Depth}) =$	1444	YES OK
			*Can Full Expected Pressure Be Held At Previous Shoe?
Pressure At Previous Shoe	$\text{Max BHP} - .22 * (\text{Setting Depth} - \text{Previous Shoe Depth}) =$	1532	NO Reasonable for area
Required Casing/BOPE Test Pressure=		2000	psi
*Max Pressure Allowed @ Previous Casing Shoe=		400	psi *Assumes 1psi/ft frac gradient

Calculations	String		"
Max BHP (psi)	$.052 * \text{Setting Depth} * \text{MW} =$		
			BOPE Adequate For Drilling And Setting Casing at Depth?
MASP (Gas) (psi)	$\text{Max BHP} - (0.12 * \text{Setting Depth}) =$		NO
MASP (Gas/Mud) (psi)	$\text{Max BHP} - (0.22 * \text{Setting Depth}) =$		NO
			*Can Full Expected Pressure Be Held At Previous Shoe?
Pressure At Previous Shoe	$\text{Max BHP} - .22 * (\text{Setting Depth} - \text{Previous Shoe Depth}) =$		NO
Required Casing/BOPE Test Pressure=			psi
*Max Pressure Allowed @ Previous Casing Shoe=			psi *Assumes 1psi/ft frac gradient

Calculations	String		"
Max BHP (psi)	$.052 * \text{Setting Depth} * \text{MW} =$		
			BOPE Adequate For Drilling And Setting Casing at Depth?
MASP (Gas) (psi)	$\text{Max BHP} - (0.12 * \text{Setting Depth}) =$		NO
MASP (Gas/Mud) (psi)	$\text{Max BHP} - (0.22 * \text{Setting Depth}) =$		NO
			*Can Full Expected Pressure Be Held At Previous Shoe?
Pressure At Previous Shoe	$\text{Max BHP} - .22 * (\text{Setting Depth} - \text{Previous Shoe Depth}) =$		NO
Required Casing/BOPE Test Pressure=			psi
*Max Pressure Allowed @ Previous Casing Shoe=			psi *Assumes 1psi/ft frac gradient

43047509680000 Hancock 1-24-4-1

Casing Schematic

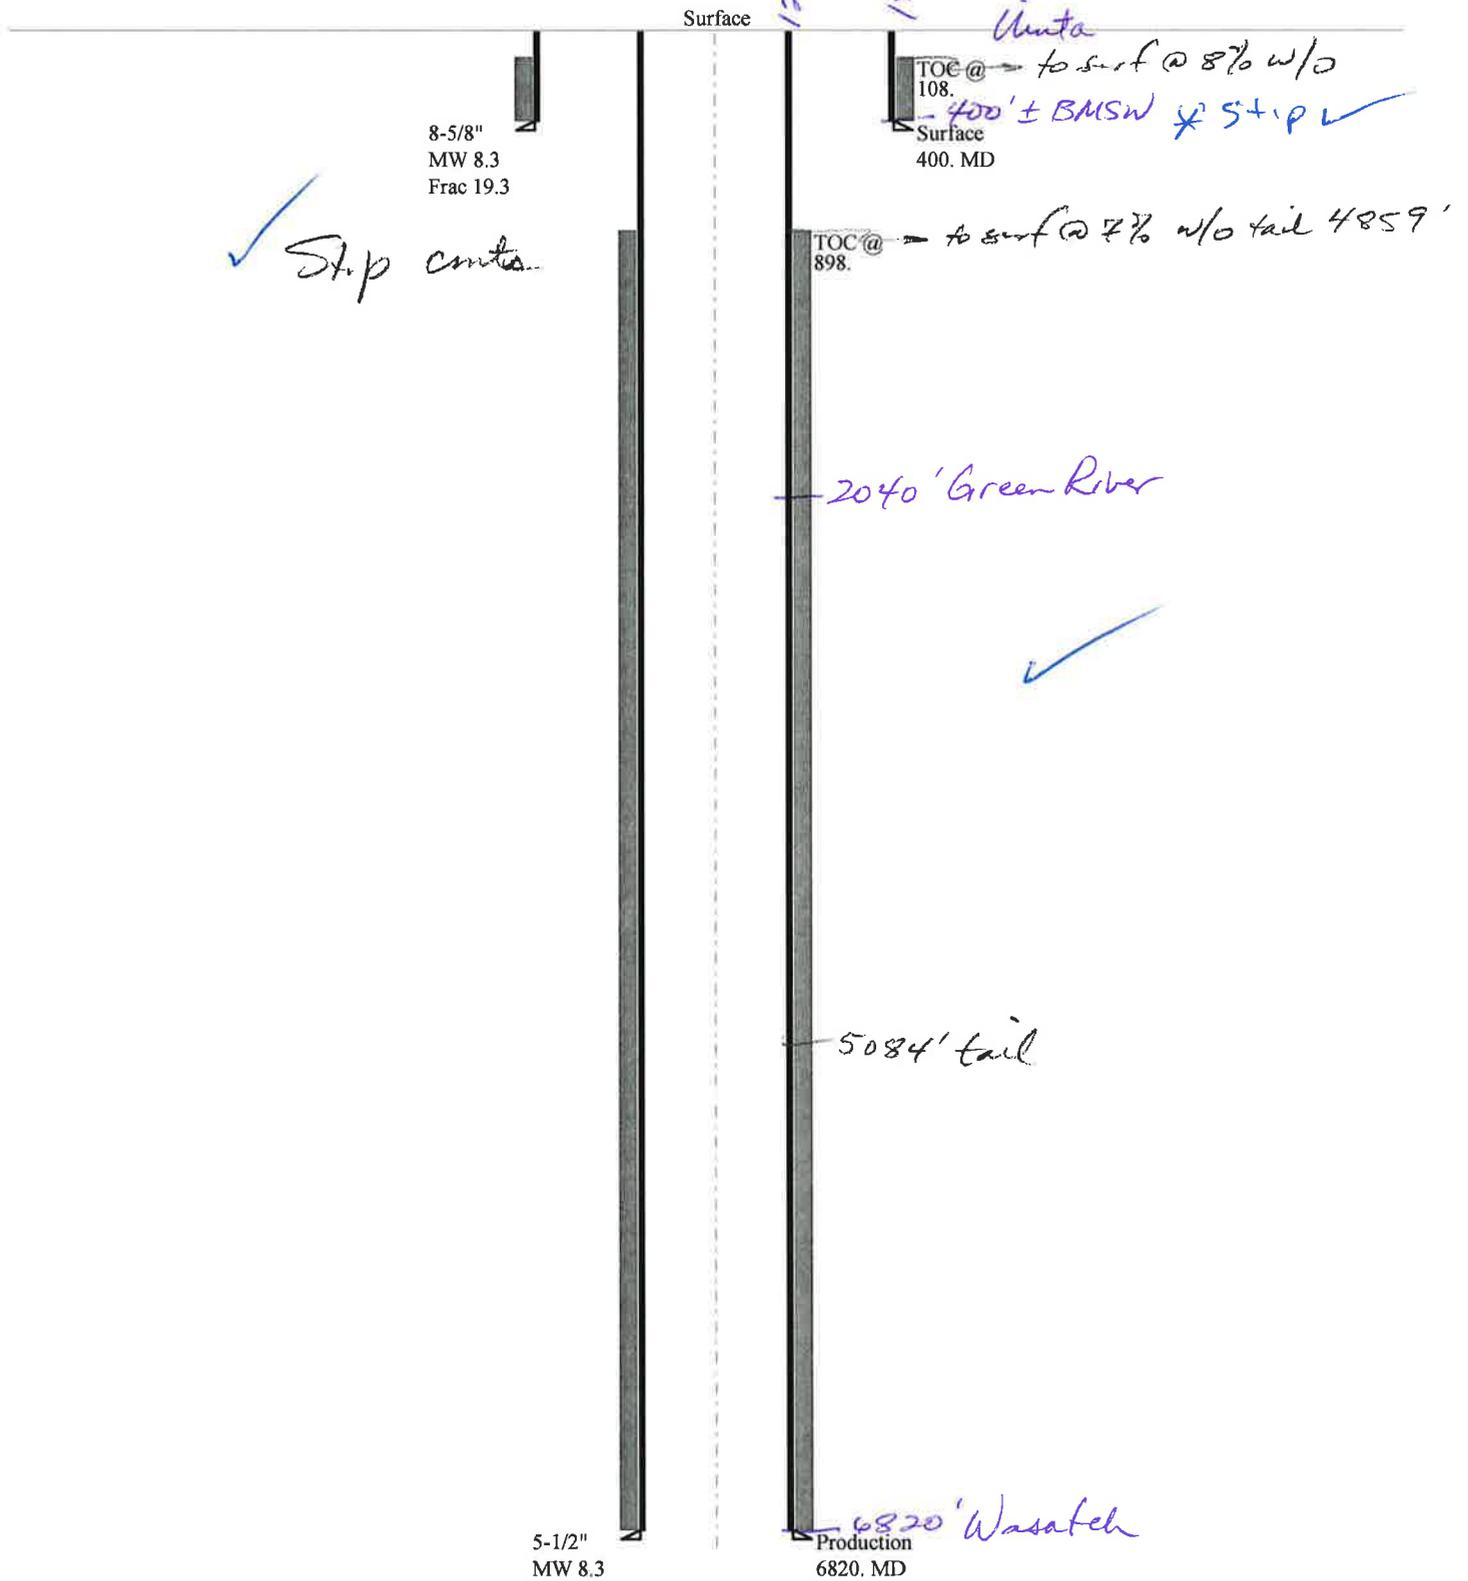

Well name:	43047509680000 Hancock 1-24-4-1		
Operator:	NEWFIELD PRODUCTION COMPANY		
String type:	Surface	Project ID:	43-047-50968
Location:	UINTAH	COUNTY	

Design parameters:

Collapse

Mud weight: 8.330 ppg
 Design is based on evacuated pipe.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Environment:

H2S considered? No
 Surface temperature: 74 °F
 Bottom hole temperature: 80 °F
 Temperature gradient: 1.40 °F/100ft
 Minimum section length: 100 ft

Cement top: 108 ft

Burst

Max anticipated surface pressure: 352 psi
 Internal gradient: 0.120 psi/ft
 Calculated BHP 400 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)
 8 Round LTC: 1.70 (J)
 Buttress: 1.60 (J)
 Premium: 1.50 (J)
 Body yield: 1.50 (B)

Tension is based on air weight.
 Neutral point: 350 ft

Non-directional string.

Re subsequent strings:

Next setting depth: 6,820 ft
 Next mud weight: 8.400 ppg
 Next setting BHP: 2,976 psi
 Fracture mud wt: 19,250 ppg
 Fracture depth: 400 ft
 Injection pressure: 400 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost (\$)
1	400	8.625	24.00	J-55	ST&C	400	400	7.972	2059
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (kips)	Tension Strength (kips)	Tension Design Factor
1	173	1370	7.917	400	2950	7.38	9.6	244	25.42 J

Prepared by: Helen Sadik-Macdonald
 Div of Oil, Gas & Mining

Phone: 801 538-5357
 FAX: 801-359-3940

Date: March 17, 2010
 Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 400 ft, a mud weight of 8.33 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Well name:	43047509680000 Hancock 1-24-4-1		
Operator:	NEWFIELD PRODUCTION COMPANY		
String type:	Production	Project ID:	43-047-50968
Location:	UINTAH	COUNTY	

Design parameters:

Collapse

Mud weight: 8.330 ppg
 Design is based on evacuated pipe.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Environment:

H2S considered? No
 Surface temperature: 74 °F
 Bottom hole temperature: 169 °F
 Temperature gradient: 1.40 °F/100ft
 Minimum section length: 100 ft

Cement top: 898 ft

Burst

Max anticipated surface pressure: 1,451 psi
 Internal gradient: 0.220 psi/ft
 Calculated BHP 2,951 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)
 8 Round LTC: 1.80 (J)
 Buttress: 1.60 (J)
 Premium: 1.50 (J)
 Body yield: 1.60 (B)

Non-directional string.

Tension is based on air weight.
 Neutral point: 5,961 ft

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost (\$)
1	6820	5.5	15.50	J-55	LT&C	6820	6820	4.825	24081
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (kips)	Tension Strength (kips)	Tension Design Factor
1	2951	4040	1.369	2951	4810	1.63	105.7	217	2.05 J

Prepared by: Helen Sadik-Macdonald
 Div of Oil, Gas & Mining

Phone: 801 538-5357
 FAX: 801-359-3940

Date: March 17, 2010
 Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 6820 ft, a mud weight of 8.33 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

ON-SITE PREDRILL EVALUATION

Utah Division of Oil, Gas and Mining

Operator NEWFIELD PRODUCTION COMPANY
Well Name Hancock 1-24-4-1
API Number 43047509680000 **APD No** 2426 **Field/Unit** UNDESIGNATED
Location: 1/4,1/4 NENE **Sec** 24 **Tw** 4.0S **Rng** 1.0W 771 FNL 477 FEL
GPS Coord (UTM) 590622 4442037 **Surface Owner** Henderson Ranches LLC

Participants

Floyd Bartlett (DOGM), Tim Eaton, Cheyene Bateman (Newfield), Cory Miller (Tri-State Land Surveying).

Regional/Local Setting & Topography

The proposed location is approximately 12 road miles southeast of Myton, UT in the bottom of Pleasant Valley Wash. This wash drains into the Pariette Draw drainage. These draws contain perennial streams somewhat consisting of irrigation runoff and seepage. Pariette Draw runs into the Green River approximately 6 miles downstream from Ouray, Utah and about 10 miles downstream from the location. The broad flats of Pleasant Valley that are frequently used for agriculture characterize the area. Flats are intersected by drainages with gentle to moderate side slopes. Access to the site is by State, County and existing or planned oil field development roads. Approximately 880 feet of new construction across Henderson's private land will be required to reach the location.

The specific site for the proposed Hancock 1-24-4-1 oil well is on the south side of the wide flat bottom of Pleasant Valley Wash. The bottom is approximately 1 mile wide. The site is bordered on the southwest by the steep slope of a wide bench which on top has irrigated fields. One slight drainage intersects the southeast corner of the site. The Location Layout Sheet shows a constructed diversion around the upslope side of the pad continuing around and down both north and south sides. This should be constructed as determined necessary. No springs, seeps streams or open water exist in the immediate area. The site appears to be suitable for pad construction, drilling and operating the well as proposed.

Henderson Ranches owns the surface of the location.

Surface Use Plan

Current Surface Use

- Grazing
- Recreational
- Wildlife Habitat

New Road Miles	Well Pad	Src Const Material	Surface Formation
0.12	Width 204 Length 305	Onsite	UNTA

Ancillary Facilities N

Waste Management Plan Adequate?

Environmental Parameters

Affected Floodplains and/or Wetlands N

Flora / Fauna

Approximately 6 inches of snow covered the site, which is quite barren. Identified vegetation included halogeton, shadscale, greasewood, rabbitbrush and weedy annuals.

Cattle, deer, small mammals and birds.

Soil Type and Characteristics

Deep clayey sandy loam.

Erosion Issues N

Sedimentation Issues N

Site Stability Issues N

Drainage Diversion Required? Y

One slight drainage intersects the southeast corner of the site. The Location Layout Sheet shows a constructed diversion around the upslope side of the pad continuing around and down both north and south sides. Construct as needed.

Berm Required? Y

Erosion Sedimentation Control Required? N

Paleo Survey Run? N **Paleo Potential Observed?** N **Cultural Survey Run?** N **Cultural Resources?**

Reserve Pit

Site-Specific Factors

Site Ranking

Distance to Groundwater (feet)	25 to 75	15	
Distance to Surface Water (feet)	>1000	0	
Dist. Nearest Municipal Well (ft)	>5280	0	
Distance to Other Wells (feet)	300 to 1320	10	
Native Soil Type	Mod permeability	10	
Fluid Type	Fresh Water	5	
Drill Cuttings	Normal Rock	0	
Annual Precipitation (inches)		0	
Affected Populations			
Presence Nearby Utility Conduits	Not Present	0	
	Final Score	40	1 Sensitivity Level

Characteristics / Requirements

The reserve pit will be 40' x 80' x 8' deep located in an area of cut on the southwest side of the location. A pit liner is required. Newfield commonly uses a 16-mil liner.

Closed Loop Mud Required? N **Liner Required?** Y **Liner Thickness** 16 **Pit Underlayment Required?** Y

Other Observations / Comments

Floyd Bartlett
Evaluator

3/9/2010
Date / Time

Application for Permit to Drill Statement of Basis

3/18/2010

Utah Division of Oil, Gas and Mining

Page 1

APD No	API WellNo	Status	Well Type	Surf Owner	CBM
2426	43047509680000	LOCKED	OW	P	No
Operator	NEWFIELD PRODUCTION COMPANY		Surface Owner-APD	Henderson Ranches LLC	
Well Name	Hancock 1-24-4-1		Unit		
Field	UNDESIGNATED		Type of Work	DRILL	
Location	NENE 24 4S 1W U 771 FNL 477 FEL GPS Coord (UTM) 590620E 4442031N				

Geologic Statement of Basis

Newfield proposes to set 400' of surface casing at this location. The depth to the base of the moderately saline water at this location is estimated to be at a depth of 400'. A search of Division of Water Rights records shows no water wells within a 10,000 foot radius of the center of Section 24. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be an interconnected, high volume source of useable ground water. The proposed casing and cement should adequately protect usable ground water in this area.

Brad Hill
APD Evaluator

3/16/2010
Date / Time

Surface Statement of Basis

The proposed location is approximately 12 road miles southeast of Myton, UT in the bottom of Pleasant Valley Wash. This wash drains into the Pariette Draw drainage. These draws contain perennial streams somewhat consisting of irrigation runoff and seepage. Pariette Draw runs into the Green River approximately 6 miles downstream from Ouray, Utah and about 10 miles downstream from the location. The broad flats of Pleasant Valley that are frequently used for agriculture characterize the area. Flats are intersected by drainages with gentle to moderate side slopes. Access to the site is by State, County and existing or planned oil field development roads. Approximately 880 feet of new construction across Henderson's private land will be required to reach the location.

The specific site for the proposed Hancock 1-24-4-1 oil well is on the south side of the wide flat bottom of Pleasant Valley Wash. The bottom is approximately 1 mile wide. The site is bordered on the southwest by the steep slope of a wide bench which on top has irrigated fields. One slight drainage intersects the southeast corner of the site. The Location Layout Sheet shows a constructed diversion around the upslope side of the pad continuing around and down both north and south sides. This should be constructed as determined necessary. No springs, seeps streams or open water exist in the immediate area. The site appears to be suitable for pad construction, drilling and operating the well as proposed.

Henderson Ranches owns the surface of the location. A surface use agreement has been signed. Wayne and Tommy Henderson were met that morning prior to the pre-site. They said they would only attend the evaluations for the few wells they had concerns with. They had no concerns regarding this location. The minerals are FEE, owned by a different party and under lease to Newfield Production Company. The landowners have waived a cultural resource survey.

Floyd Bartlett
Onsite Evaluator

3/9/2010
Date / Time

Conditions of Approval / Application for Permit to Drill

Category	Condition
Pits	A synthetic liner with a minimum thickness of 16 mils with a felt subliner shall be properly installed and maintained in the reserve pit.

Application for Permit to Drill Statement of Basis

3/18/2010

Utah Division of Oil, Gas and Mining

Page 2

Surface	The well site shall be bermed to prevent fluids from leaving the pad.
Surface	Drainages adjacent to the proposed pad shall be diverted around the location as needed.
Surface	The reserve pit shall be fenced upon completion of drilling operations.

WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 2/26/2010

API NO. ASSIGNED: 43047509680000

WELL NAME: Hancock 1-24-4-1

OPERATOR: NEWFIELD PRODUCTION COMPANY (N2695)

PHONE NUMBER: 435 646-4825

CONTACT: Mandie Crozier

PROPOSED LOCATION: NENE 24 040S 010W

Permit Tech Review:

SURFACE: 0771 FNL 0477 FEL

Engineering Review:

BOTTOM: 0771 FNL 0477 FEL

Geology Review:

COUNTY: UINTAH

LATITUDE: 40.12561

LONGITUDE: -109.93646

UTM SURF EASTINGS: 590620.00

NORTHINGS: 4442031.00

FIELD NAME: UNDESIGNATED

LEASE TYPE: 4 - Fee

LEASE NUMBER: Fee

PROPOSED PRODUCING FORMATION(S): GREEN RIVER

SURFACE OWNER: 4 - Fee

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

- PLAT
- Bond: STATE/FEE - B001834
- Potash
- Oil Shale 190-5
- Oil Shale 190-3
- Oil Shale 190-13
- Water Permit: 43-7478
- RDCC Review:
- Fee Surface Agreement
- Intent to Commingle

Commingle Approved

LOCATION AND SITING:

- R649-2-3.
- Unit:
- R649-3-2. General
- R649-3-3. Exception
- Drilling Unit
- Board Cause No: R649-3-2
- Effective Date:
- Siting:
- R649-3-11. Directional Drill

Comments: Presite Completed

Stipulations: 5 - Statement of Basis - bhill
23 - Spacing - dmason
25 - Surface Casing - ddoucet



State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: Hancock 1-24-4-1
API Well Number: 43047509680000
Lease Number: Fee
Surface Owner: FEE (PRIVATE)
Approval Date: 3/18/2010

Issued to:

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of R649-3-2. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis (copy attached).

Surface casing shall be cemented to the surface.

Additional Approvals:

The operator is required to obtain approval from the Division of Oil, Gas and mining before performing any of the following actions during the drilling of this well:

- Any changes to the approved drilling plan – contact Dustin Doucet
- Significant plug back of the well – contact Dustin Doucet
- Plug and abandonment of the well – contact Dustin Doucet

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well – contact Carol Daniels
OR
submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at <https://oilgas.ogm.utah.gov>
- 24 hours prior to testing blowout prevention equipment - contact Dan Jarvis
- 24 hours prior to cementing or testing casing – contact Dan Jarvis
- Within 24 hours of making any emergency changes to the approved drilling program – contact Dustin Doucet
- 24 hours prior to commencing operations to plug and abandon the well – contact Dan Jarvis

Contact Information:

The following are Division of Oil, Gas and Mining contacts and their telephone numbers (please leave a voicemail message if the person is not available to take the call):

- Carol Daniels 801-538-5284 - office
- Dustin Doucet 801-538-5281 - office
801-733-0983 - after office hours
- Dan Jarvis 801-538-5338 - office
801-231-8956 - after office hours

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

Approved By:



For Gil Hunt
Associate Director, Oil & Gas

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
5. LEASE DESIGNATION AND SERIAL NUMBER: Fee	

SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME:
--	--

1. TYPE OF WELL Oil Well	8. WELL NAME and NUMBER: Hancock 1-24-4-1
------------------------------------	---

2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY	9. API NUMBER: 43047509680000
--	---

3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052	PHONE NUMBER: 435 646-4825 Ext	9. FIELD and POOL or WILDCAT: UNDESIGNATED
--	--	--

4. LOCATION OF WELL FOOTAGES AT SURFACE: 0771 FNL 0477 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NENE Section: 24 Township: 04.0S Range: 01.0W Meridian: U	COUNTY: UINTAH STATE: UTAH
---	---

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 4/26/2010 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input checked="" type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: APD Change

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield requests to amend the proposed depth for the Hancock 1-24-4-1 from 6820' to 7070'. The new proposed depth will be 250' deeper than originally permitted. The change is necessary to give enough space for the rathole in order to complete the Basal Carbonate without having to drill out cement. The remainder of the APD will remain the same.

Approved by the Utah Division of Oil, Gas and Mining

Date: May 05, 2010

By: *Dan K. [Signature]*

NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A	DATE 4/26/2010	

Spud
BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# Ross Rig # 21
Submitted By Xabier Lasa Phone Number 435-823-6014
Well Name/Number Hancock 1-24-4-1
Qtr/Qtr NE/NE Section 24 Township 4S Range 1W
Lease Serial Number Fee
API Number 43-047-509680000

Spud Notice – Spud is the initial spudding of the well, not drilling out below a casing string.

Date/Time 6-2-10 9:00

AM PM

Casing – Please report time casing run starts, not cementing times.

- Surface Casing
- Intermediate Casing
- Production Casing
- Liner
- Other

Date/Time 6-2-10 3:00 AM PM

BOPE

- Initial BOPE test at surface casing point
- BOPE test at intermediate casing point
- 30 day BOPE test
- Other

Date/Time _____ AM PM

Remarks Spud With Ross Rig #21 @ 9:00 am On 6-2-10 Run 8
5/8" Casing @ 3:00 pm on 6-2-10.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

5. I. EASE DESIGNATION AND SERIAL NUMBER:

Free

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

7. UNIT or CA AGREEMENT NAME:

1. TYPE OF WELL:

OIL WELL GAS WELL OTHER

8. WELL NAME and NUMBER:

HANCOCK 1-24-4-1

2. NAME OF OPERATOR:

NEWFIELD PRODUCTION COMPANY

9. API NUMBER:

4304750968

3. ADDRESS OF OPERATOR:

Route 3 Box 3630 CITY Myton STATE UT ZIP 84052

PHONE NUMBER

435.646.3721

10. FIELD AND POOL, OR WILDCAT:

MYTON/TRIBAL EDA

4. LOCATION OF WELL:

FOOTAGES AT SURFACE:

COUNTY: UINTAH

OTR/OTR. SECTION. TOWNSHIP. RANGE. MERIDIAN: NENE, 24, T4S, R1W

STATE: UT

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of Work Completion: 06/04/2010	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/STOP)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: - Spud Notice
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

On 6/2/10 MIRU Ross # 21. Spud well @ 9:00 AM. Drill 450' of 12 1/4" hole with air mist. TIH W/ 10 Jt's 8 5/8" J-55 24# casing. Set @ 442.17' KB. On 6/4/10 cement with 220 sks of class "G" w/ 2% CaCL2 + 1/4# per sk Cello Flake mixed @ 15.8 ppg with 1.17 cf/sk yield. Returned 6.5 bbls cement to pit. WOC.

NAME (PLEASE PRINT) Mitch Benson

TITLE Drilling Foreman

SIGNATURE *Mitch Benson*

DATE 06/04/2010

(This space for State use only)

RECEIVED

JUN 22 2010

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

5. LEASE DESIGNATION AND SERIAL NUMBER:
MON BUTTE EDA 20G0005609

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

1. TYPE OF WELL: OIL WELL GAS WELL OTHER

8. WELL NAME and NUMBER:
HANCOCK 1-24-4-1

2. NAME OF OPERATOR:
NEWFIELD PRODUCTION COMPANY

9. API NUMBER:
4304750968

3. ADDRESS OF OPERATOR: Route 3 Box 3630 CITY Myton STATE UT ZIP 84052 PHONE NUMBER 435.646.3721

10. FIELD AND POOL, OR WILDCAT:
MYTON-TRIBAL EDA

4. LOCATION OF WELL:
FOOTAGES AT SURFACE:

COUNTY: UINTAH

OTR/OTR. SECTION. TOWNSHIP. RANGE. MERIDIAN: NENE, 24, T4S, R1W

STATE: UT

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of Work Completion: 07/20/2010	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/STOP)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: - Weekly Status Report
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The above subject well was completed on 07-20-10, attached is a daily completion status report.

NAME (PLEASE PRINT) Lucy Chavez-Naupoto

TITLE Administrative Assistant

SIGNATURE 

DATE 07/20/2010

(This space for State use only)

RECEIVED
JUL 22 2010
DIV. OF OIL, GAS & MINING

Daily Activity Report

Format For Sundry

HANCOCK 1-24-4-1**5/1/2010 To 9/30/2010****7/12/2010 Day: 1****Completion**

Rigless on 7/12/2010 - Ran CBL & perforated 1st stage. SIWFN w/ 166 BWTR. - NU frac head & Cameron BOP's. RU Hot oiler & test casing, frac head, frac valves & BOP to 4500 psi. RU WLT w/ mast & pack off tool. Run CBL under pressure. WLTD was 6897' w/ TOC @ 146'. RIH w/ 3 1/8" ported guns & perforate CP4 sds @ 6508- 11' & CP3 sds @ 6447- 54' w/ (11 gram, .36"EH, 16.82¢ pen. 120°) 3 spf for total of 30 shots. RD WLT & Hot Oiler. SIWFN w/ 166 BWTR.

Daily Cost: \$0**Cumulative Cost:** \$9,894**7/14/2010 Day: 2****Completion**

Rigless on 7/14/2010 - Frac well. - RU The Perforators. Set CBP & perf GB4 sds as shown in perforation report. RU BJ Services. Perfs would not break. Dump bail acid on perfs. RU BJ Services. Frac GB4 sds as shown in stimulation report. RD BJ Services & The Perforators. Open well to pit for immediate flowback @ approx. 3 bpm. Well flowed for 3.5 hrs. Recovered 470 bbls. SWIFN. - RU The Perforators. Set CBP & perf B2 sds as shown in perforation report. RU BJ Services. Perfs would not break. Dump bail acid on perfs. RU BJ Services. Perfs would not break. Dump bail acid on perfs. RU BJ Services. Frac B2 sds as shown in stimulation report. 1042 BWTR. - RU BJ Services. Frac CP4/CP3 sds as shown in stimulation report. 620 BWTR.

Daily Cost: \$0**Cumulative Cost:** \$71,249**7/16/2010 Day: 3****Completion**

Nabors #809 on 7/16/2010 - MIRU Nabors #809. ND Cameron BOP. NU Schaeffer BOP. SWIFN. 972 BWTR. - MIRU Nabors #809. Bleed off well. ND Cameron BOP & 5m frac head. NU 3m production head & Schaeffer BOP. SWIFN. 972 BWTR.

Daily Cost: \$0**Cumulative Cost:** \$74,142**7/17/2010 Day: 4****Completion**

Nabors #809 on 7/17/2010 - RIH w/ tbg. DU CBPs. C/O to PBTD. Swab. - RIH w/ 4 3/4" chomp bit, bit sub & new 2 7/8" tbg. from pipe racks (tallying & drifting). Tag CBP @ 5080'. RU powerswivel & pump. DU CBP in 30 min. Cont. RIH w/ tbg. Tag fill @ 5930'. C/O to CBP @ 5940'. DU CBP in 35 min. Cont. RIH w/ tbg. Tag fill @ 6835'. C/O to PBTD @ 6910'. Circulate well clean. Pull up to 6800'. RIH w/ swab. SFL @ surface. Made 14 runs. Recovered 170 bbls. No show of oil or gas. SWIFN.

Daily Cost: \$0**Cumulative Cost:** \$122,677**RECEIVED****JUL 22 2010****7/19/2010 Day: 5**DIV. OF OIL, GAS & MINING
Completion

Nabors #809 on 7/19/2010 - Round trip tbg. ND BOP. NU wellhead. PU rods. RU pumping unit. Hang off rods. Stroke test to 800 psi. Good pump action. SWIFN. - RIH w/ tbg. Tag PBTD @ 6910'. Circulate well clean. POOH w/ tbg. LD BHA. RIH w/ 2 7/8" notched collar, 2 jts 2 7/8" tbg., PSN, 1 jt 2 7/8" tbg., 5 1/2" TAC & 205 jts 2 7/8" tbg. ND BOP. Set TAC @ 6466' w/ 18,000# tension. NU wellhead. X-over for rods. Flush tbg. w/ 60 bbls water. RIH w/ Central Hydraulic rod pump, 6- 1 1/2" weight bars, 20- 3/4" guided rods, 139- 3/4" slick rods, 94- 7/8" guided rods, 1- 4', 2' x 7/8" pony subs, 1 1/2" x 26' polished rod. Seat pump. RU pumping unit. Stroke test pump to 800 psi. Good pump action. Could not put well on production due flowline issues. SWIFN.

Daily Cost: \$0

Cumulative Cost: \$157,473

7/20/2010 Day: 6

Completion

Nabors #809 on 7/20/2010 - Finish flowline. PWOP @ 4:00 p.m. 122" stroke length, 5 spm. 860 BWTR. Final Report. - Finish flowline. PWOP @ 4:00 p.m. 122" stroke length, 5 spm. Final Report. 860 BWTR. **Finalized**

Daily Cost: \$0

Cumulative Cost: \$159,273

Pertinent Files: Go to File List

RECEIVED

JUL 22 2010

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

a. Type of Well Oil Well Gas Well Dry Other
 b. Type of Completion: New Well Work Over Deepen Plug Back Diff. Resrv.,
 Other: _____

2. Name of Operator
NEWFIELD EXPLORATION COMPANY

3. Address
1401 17TH ST. SUITE 1000 DENVER, CO 80202

3a. Phone No. (include area code)
(435)646-3721

4. Location of Well (Report location clearly and in accordance with Federal requirements)*

At surface 771' FNL & 477' FEL (NE/NE) SEC. 24, T4S, R1W

At top prod. interval reported below

At total depth 7045'

14. Date Spudded
06/02/2010

15. Date T.D. Reached
07/03/2010

16. Date Completed 07/19/2010
 D & A Ready to Prod.

17. Elevations (DF, RKB, RT, GL)*
4946' GL 4958' KB

18. Total Depth: MD 7045'
TVD

19. Plug Back T.D.: MD 6910'
TVD

20. Depth Bridge Plug Set: MD
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
DUAL IND GRD, SP, COMP. DENSITY, COMP. NEUTRON, GR, CALIPER, CMT BOND

22. Was well cored? No Yes (Submit analysis)
Was DST run? No Yes (Submit report)
Directional Survey? No Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sks. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12-1/4"	8-5/8" J-55	24#	0	442'		220 CLASS G			
7-7/8"	5-1/2" J-55	15.5#	0	7030'		325 PRIMLITE		146'	
						400 50/50 POZ			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-7/8"	EOT@ 6565'	TA @ 6466'						

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Green River			647-6511' CP3 P4	.36"	3	30
B) Green River			5841-5867' B2	.36"	3	24
C) Green River			4965-4978' GB4	.36"	3	30
D) Green River						

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

Depth Interval	Amount and Type of Material
647-6511'	Frac w/ 29424#'s 20/40 sand in 247 bbls of Lightning 17 fluid.
5841-5867'	Frac w/ 41017#'s 20/40 sand in 266 bbls of Lightning 17 fluid.
4965-4978'	Frac w/ 41971#'s 20/40 sand in 270 bbls of Lightning 17 fluid.

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
7-19-10	7-31-10	24	→	59	19	34			2-1/2" x 1-1/2" x 20' RHAC Pump
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	PRODUCING
			→						

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

RECEIVED
AUG 16 2010

*(See instructions and spaces for additional data on page 2)

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production ➔	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate ➔	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production ➔	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate ➔	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

29. Disposition of Gas (Solid, used for fuel, vented, etc.)

USED FOR FUEL

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

GEOLOGICAL MARKERS

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
				GARDEN GULCH MRK GARDEN GULCH 1	4457' 4639'
				GARDEN GULCH 2 POINT 3	4764' 5052'
				X MRKR Y MRKR	5283' 5319'
				DOUGALS CREEK MRK BI CARBONATE MRK	5464' 5761'
				B LIMESTON MRK CASTLE PEAK	5879' 6284'
				BASAL CARBONATE WASATCH	6656' 6778'

32. Additional remarks (include plugging procedure):

33. Indicate which items have been attached by placing a check in the appropriate boxes:

- Electrical/Mechanical Logs (1 full set req'd.)
 Geologic Report
 DST Report
 Directional Survey
 Sundry Notice for plugging and cement verification
 Core Analysis
 Other: Drilling Daily Activity

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) Lucy Chavez-Naupoto Title Administrative Assistant

Signature  Date 08/11/2010

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Daily Activity Report

Format For Sundry

HANCOCK 1-24-4-1**4/1/2010 To 8/30/2010****HANCOCK 1-24-4-1****Waiting on Cement****Date:** 6/4/2010

Ross #21 at 450. Days Since Spud - Returned 6.5 bbls to pit. - 8 5/8" casing w/ 220 sks Class "G" + 2% CaCl₂ + 0.25#/sk Cello Flake at 15.8 ppg w/ 1.17 yield. - casing (guide shoe, shoe jt, baffle plate, 9 jts) set @ 442.17' KB. On 6/4/10 BJ Services cemented - On 6/2/10 Ross Rig #21 spud Hancock 1-24-4-1, drilled 450' of 12 1/4" hole, and ran 10 jts 8 5/8"

Daily Cost: \$0**Cumulative Cost:** \$49,680**HANCOCK 1-24-4-1****Drill 7 7/8" hole with fresh water****Date:** 6/30/2010

NDSI #3 at 1984. 1 Days Since Spud - Drill 7 7/8" from 398' to 629'/ WOB 12/RPM 68/ GPM 420/ ROP 116 FPH - RU Quick test / test kelly, safety valve, pipe & blind rams & choke to 2000 psi / OK /Test Csg. To - Drill out caved in Rat & mouse hole - On 6/29/10 Jones trucking moved rig #3 5 miles from Hancock 7-24-4-1 to Hancock 1-24-4-1/Set equip - Drill 7 7/8" hole from 629' to 1984'/ WOB 21/ RPM 68/ GPM 420/ ROP 143 FPH - Install Rotating head rubber & Drive bushings - PU BHA with Extreme Dir. Tools/ Tag Cmt. @ 398' - 1500 psi for 30 min. / OK

Daily Cost: \$0**Cumulative Cost:** \$114,793**HANCOCK 1-24-4-1****Drill 7 7/8" hole with fresh water****Date:** 7/1/2010

NDSI #3 at 4360. 2 Days Since Spud - Rig service/ Function test BOP's & Crown-O-Matic/OK - Drill 7 7/8" hole from 3056' to 4360'/ WOB 22/RPM 47/GPM 420/ROP 87FPH - Drill 7 7/8" hole from 1984' to 3056'/WOB22/RPM 62/GPM 420/ ROP 126 FPH

Daily Cost: \$0**Cumulative Cost:** \$169,816**HANCOCK 1-24-4-1****Drill 7 7/8" hole with fresh water****Date:** 7/2/2010

NDSI #3 at 6177. 3 Days Since Spud - Drill 7 7/8" hole from 4360' to 5105'/ WOB 23/ RPM 48/ GPM 420/ ROP 93FPH/ - Drill 7 7/8" hole from 5105' to 6177'/ WOB 20/RPM 60/ GPM 420/ ROP 69 FPH - Rig service/Function test BOP's & Crown-O-Matic/OK/Flow 3 GPM

Daily Cost: \$0**Cumulative Cost:** \$186,621**HANCOCK 1-24-4-1****Logging****Date:** 7/3/2010

NDSI #3 at 7060. 4 Days Since Spud - Circ & Cond for logs - LDDP to 4000' - Pump 360 bbl 10# Brine for flow/Well Dead - LDDP & BHA - Wait on Halliburton/They forgot to call & tell me they didn't have a Logging truck./2 days notice - when we would be logging.Called again @ 6:00 AM 7/2/10 , again @ TD 7/2/10. - RU PSI & Log well/ Computer problems/ Change out logging truck - Drill 7 7/8" hole from 6177' to 7060'/WOB 25/RPM 40/GPM 420/ROP 98 FPH/Flow 3GPM/Slide 18' @ 6209'

Daily Cost: \$0

Cumulative Cost: \$214,431

HANCOCK 1-24-4-1

Rigging down

Date: 7/4/2010

NDSI #3 at 7060. 5 Days Since Spud - from Loggers TD of 7048' to surface. - Change & test Csg. Rams/OK RU QT Casers - Ran 161 jts 5.5" J55 15.5# LT&C Csg.Land @ 7030.07' Float @ 6985.43'/Transfer 4 jts. 175.88' to 2-24 - Circ with rig pump & RU BJ - Cmt. With BJ 325 sks PLII+3%KCL+5#CSE+0.5#CF+2#KOL+.5SMS+FP+SF/11 ppg 3.53 yield followed by - Finish Logging with PSI/Ran Triple Combo/Density ,Porosity, Resistivity, & Gamma Ray with Caliper - displacement/10 bbls cmt to pit.Float held - ND BOP's & set Csg slips with 112,000# tension - Clean mud tanks - Release rig @ 1700 7/3/10 - 400 sks 50:50:2+3%KCL+0.5%EC-1+.25#CF+.05#SF+.3SMS+FP-6L/14.4 ppg 1.24 yield/166.5 bbls **Finalized**

Daily Cost: \$0

Cumulative Cost: \$260,687

Pertinent Files: Go to File List

STATE OF UTAH
 DIVISION OF OIL, GAS AND MINING
 ENTITY ACTION FORM - FORM 6

OPERATOR: NEWFIELD PRODUCTION COMPANY
 ADDRESS: RT. 3 BOX 3630
 MYTON, UT 84052

OPERATOR ACCT. NO. N2695

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
A	99999	17635	4301350159	UTE TRIBAL 9-26-4-3	NESE	26	4S 88	3W	DUCHESNE	5/27/2010	6/7/10
WELL 1 COMMENTS: <i>GRRV</i>											
A	99999	17636	4301350164	UTE TRIBAL 15-26-4-3	SWSE	26	4S	3W	DUCHESNE	5/28/2010	6/7/10
WELL 2 COMMENTS: <i>GRRV</i>											
A	99999	17637	4304750946 4304750946	HANCOCK 8-22-4-1	SENE	22	4S	1W	UINTAH	5/27/2010	6/7/10
WELL 3 COMMENTS: <i>GRRV</i>											
A	99999	17638	4304750968	HANCOCK 1-24-4-1	NENE	24	4S	1W	UINTAH	6/2/2010	6/7/10
WELL 4 COMMENTS: <i>GRRV</i>											
WELL 5 COMMENTS:											
WELL 5 COMMENTS:											

- ACTION CODES (See instructions on back of form)
- A - 1 new entity for new well (single well only)
 - B - well to existing entity (group or unit well)
 - C - from one existing entity to another existing entity
 - D - well from one existing entity to a new entity
 - E - other (explain in comments section)

RECEIVED
 JUN 07 2010

DIV. OF OIL, GAS & MINING

[Signature]
 Signature
 Jentri Park
 Production Clerk
 06/07/10
 Date

NOTE: Use COMMENT section to explain why each Action Code was selected.