

STATE OF UTAH
 DEPARTMENT OF NATURAL RESOURCES
 DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL				1. WELL NAME and NUMBER Ute Tribal 9-30-4-1E		
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>				3. FIELD OR WILDCAT WINDY RIDGE		
4. TYPE OF WELL Oil Well <input type="checkbox"/> Coalbed Methane Well: NO <input type="checkbox"/>				5. UNIT or COMMUNITIZATION AGREEMENT NAME		
6. NAME OF OPERATOR NEWFIELD PRODUCTION COMPANY				7. OPERATOR PHONE 435 646-4825		
8. ADDRESS OF OPERATOR Rt 3 Box 3630 , Myton, UT, 84052				9. OPERATOR E-MAIL mcrozier@newfield.com		
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) 20G0005609		11. MINERAL OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input checked="" type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>		12. SURFACE OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>		
13. NAME OF SURFACE OWNER (if box 12 = 'fee') Rex and LaRue Lamb Trust				14. SURFACE OWNER PHONE (if box 12 = 'fee')		
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee') PO Box 374, ,				16. SURFACE OWNER E-MAIL (if box 12 = 'fee')		
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')		18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>		19. SLANT VERTICAL <input checked="" type="checkbox"/> DIRECTIONAL <input type="checkbox"/> HORIZONTAL <input type="checkbox"/>		
20. LOCATION OF WELL	FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN
LOCATION AT SURFACE	470 FSL 813 FEL	NESE	30	4.0 S	1.0 E	U
Top of Uppermost Producing Zone	470 FSL 813 FEL	NESE	30	4.0 S	1.0 E	U
At Total Depth	470 FSL 813 FEL	NESE	30	4.0 S	1.0 E	U
21. COUNTY UINTAH		22. DISTANCE TO NEAREST LEASE LINE (Feet) 470		23. NUMBER OF ACRES IN DRILLING UNIT 40		
		25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 1621		26. PROPOSED DEPTH MD: 6795 TVD: 6795		
27. ELEVATION - GROUND LEVEL 4951		28. BOND NUMBER RLB0010462		29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 43-7478		

ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES

<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input checked="" type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)	<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER
<input type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)	<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP

NAME Mandie Crozier	TITLE Regulatory Tech	PHONE 435 646-4825
SIGNATURE	DATE 04/20/2010	EMAIL mcrozier@newfield.com
API NUMBER ASSIGNED 43047510590000	APPROVAL  Permit Manager	

Proposed Hole, Casing, and Cement

String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Prod	7.875	5.5	0	6795		
Pipe	Grade	Length	Weight			
	Grade J-55 LT&C	6795	15.5			

Proposed Hole, Casing, and Cement

String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Surf	12.25	8.625	0	300		
Pipe	Grade	Length	Weight			
	Grade J-55 ST&C	300	24.0			


T4S, R1E, U.S.B.&M.

NEWFIELD PRODUCTION COMPANY

WELL LOCATION:
UTE TRIBAL 9-30-4-1E
 ELEV. UNGRADED GROUND = 4951.4'

UTE TRIBAL 9-30-4-1E
 (Surface Location) NAD 83
 LATITUDE = 40° 06' 16.64"
 LONGITUDE = 109° 55' 08.88"

WELL LOCATION, UTE TRIBAL
 9-30-4-1E, LOCATED AS SHOWN IN
 THE NE 1/4 SE 1/4 (LOT 5) OF
 SECTION 30, T4S, R1E, U.S.B.&M. UINTAH
 COUNTY, UTAH.





Notes:

1. The footages are measured perpendicular to section line.
2. The Proposed Well head bears S49°49'36"E 2770.48' from the North 1/4 Corner of Section 30.

◆ = SECTION CORNERS LOCATED

THIS IS TO CERTIFY THAT THE ABOVE PLAN WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

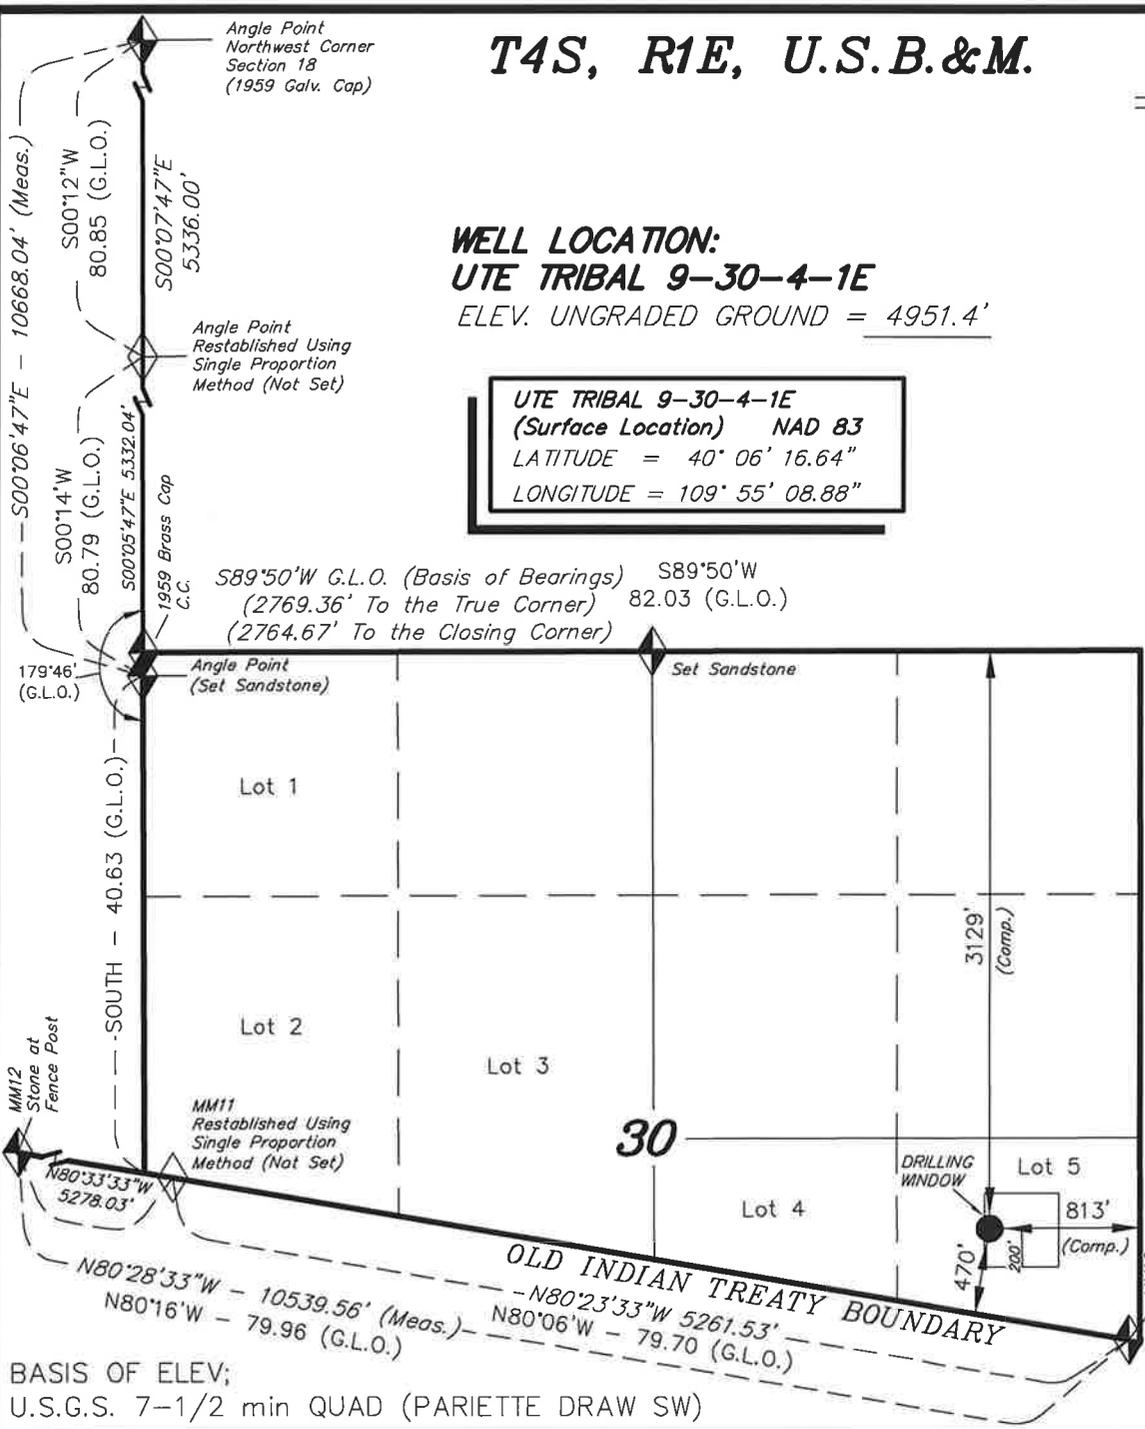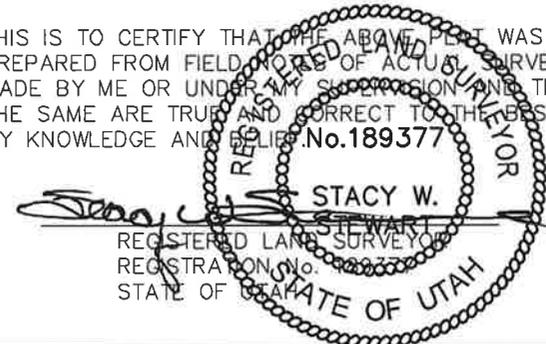

BASIS OF ELEV;
 U.S.G.S. 7-1/2 min QUAD (PARIETTE DRAW SW)

TRI STATE LAND SURVEYING & CONSULTING
 180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
 (435) 781-2501

DATE SURVEYED: 12-28-08	SURVEYED BY: C.M.
DATE DRAWN: 01-13-09	DRAWN BY: M.W.
REVISED:	SCALE: 1" = 1000'

MEMORANDUM
of
EASEMENT, RIGHT-OF-WAY
and
SURFACE USE AGREEMENT

This Easement, Right-of-Way and Surface Use Agreement ("Agreement") is entered into this 22nd day of January, 2009 by and between **Rex and LaRue Lamb Trust, Karl Lamb, trustee whose address is PO Box 374, Myton Utah 84052**, ("Surface Owner," whether one or more) and Newfield Production Company, a Texas corporation ("NEWFIELD"), with offices at 1001 17th Street, Suite 2000, Denver, Colorado 80202, covering certain lands, (the "Lands") situated in ~~Duchesne~~ Duchesne County, Utah described as follows:

Township 4 South, Range 1 East
Section 30 Lot 4 & 5

Uintah County, Utah
Being 53.65 acres, more or less,

2009003321
Book 1136 Page 452-453 \$13.00
30-MAR-09 01:49
RANDY SIMMONS
RECORDER, UINTAH COUNTY, UTAH
NEWFIELD ROCKY MOUNTAIN
1001 17 TH ST STE 2000 DENVER, CO 80202
Rec By: DEBRA ROOKS , DEPUTY

For and in consideration of the sum of ten dollars (\$10.00), and other valuable consideration, the receipt and sufficiency of which are hereby acknowledged, the undersigned hereby agree to the terms and provisions set forth as follows:

1. Compensation for Well; Release of All Claims

NEWFIELD shall pay to Surface Owner the sum as set forth in and according to the terms of that certain Letter Agreement for Easement, Right-of Way and Surface Use by and between Surface Owner and NEWFIELD, dated January 22, 2009 as full payment and satisfaction for any and all detriment, depreciation, injury or damage of any nature to the Lands or growing crops thereon that may occur as a result of NEWFIELD's drilling or completion operations or its continuing activities for the production or transportation of oil, gas, or other hydrocarbons or products associated with the foregoing including, but not limited to, surface use, access, pipelines, gathering lines, pipeline interconnections, and any and all other reasonable or customary uses of land related to said operations or activities.

2. Grant of Right of Way and Easement

Surface Owner hereby grants, bargains, leases, assigns, and conveys to NEWFIELD an easement and right-of-way for the purpose of construction, using and maintaining access roads, locations for surface equipment and subsurface gathering lines for each well drilled upon the Lands, pipelines, and pipeline interconnections for two years from date of this agreement and so long thereafter as NEWFIELD's oil and gas leases remain in effect.

This Agreement shall be binding upon the respective heirs, executors, administrators, successors, and assigns of the undersigned. This agreement replaces and supersedes any and all prior agreements covering the lands described herein.

These Parties hereto have executed this document effective as of the day first above written.

SURFACE OWNER

NEWFIELD PRODUCTION COMPANY

By: Karl Lamb
Karl Lamb
Rex and LaRue Lamb Trust Trustee

By: Gary D. Packer
Gary D. Packer, President


STATE OF UTAH)
)ss
COUNTY OF Uintah)

This instrument was acknowledged before me this 22 day of Jan, 2009 by Karl Lamb, Rex and LaRue Lamb Trust Trustee.

Witness my hand and official seal.

David Allred
Notary Public

My commission expires July 5, 2011




STATE OF COLORADO)
)ss
COUNTY OF DENVER)

This instrument was acknowledged before me this January 30, 2009 by **Gary D. Packer, as President of Newfield Production Company**, a Texas corporation, on behalf of the corporation.

Witness my hand and official seal.

Catherine B. Greway
Notary Public

My commission expires 7/12/2010



NEWFIELD PRODUCTION COMPANY
UTE TRIBAL 9-30-4-1E
NE/SE (LOT #5) SECTION 30, T4S, R1E
UINTAH COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0' – 1,865'
Green River	1,865'
Wasatch	6,545'
Proposed TD	6,795'

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation (Oil) 1,865' – 6,545'

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO ₃) (mg/l)
Dissolved Bicarbonate (NaHCO ₃) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO ₄) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. **PROPOSED CASING PROGRAM**

a. **Casing Design: Ute Tribal 9-30-4-1E**

Size	Interval		Weight	Grade	Coupling	Design Factors		
	Top	Bottom				Burst	Collapse	Tension
Surface casing 8-5/8"	0'	300'	24.0	J-55	STC	2,950	1,370	244,000
						17.53	14.35	33.89
Prod casing 5-1/2"	0'	6,795'	15.5	J-55	LTC	4,810	4,040	217,000
						2.22	1.87	2.06

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe = 13.0 ppg
 Pore pressure at surface casing shoe = 8.33 ppg
 Pore pressure at prod casing shoe = 8.33 ppg
 Gas gradient = 0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. **Cementing Design: Ute Tribal 9-30-4-1E**

Job	Fill	Description	Sacks	OH Excess*	Weight (ppg)	Yield (ft ³ /sk)
			ft ³			
Surface casing	300'	Class G w/ 2% CaCl	138	30%	15.8	1.17
			161			
Prod casing Lead	4,795'	Prem Lite II w/ 10% gel + 3% KCl	331	30%	11.0	3.26
			1080			
Prod casing Tail	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363	30%	14.3	1.24
			451			

- *Actual volume pumped will be 15% over the caliper log
- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
 - Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to ±350 feet will be drilled with an air/mist system. The air rig is equipped with a 6 ½" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about ±350 feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 300' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBDT to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated

bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the third quarter of 2010, and take approximately seven (7) days from spud to rig release.

2-M SYSTEM

Blowout Prevention Equipment Systems


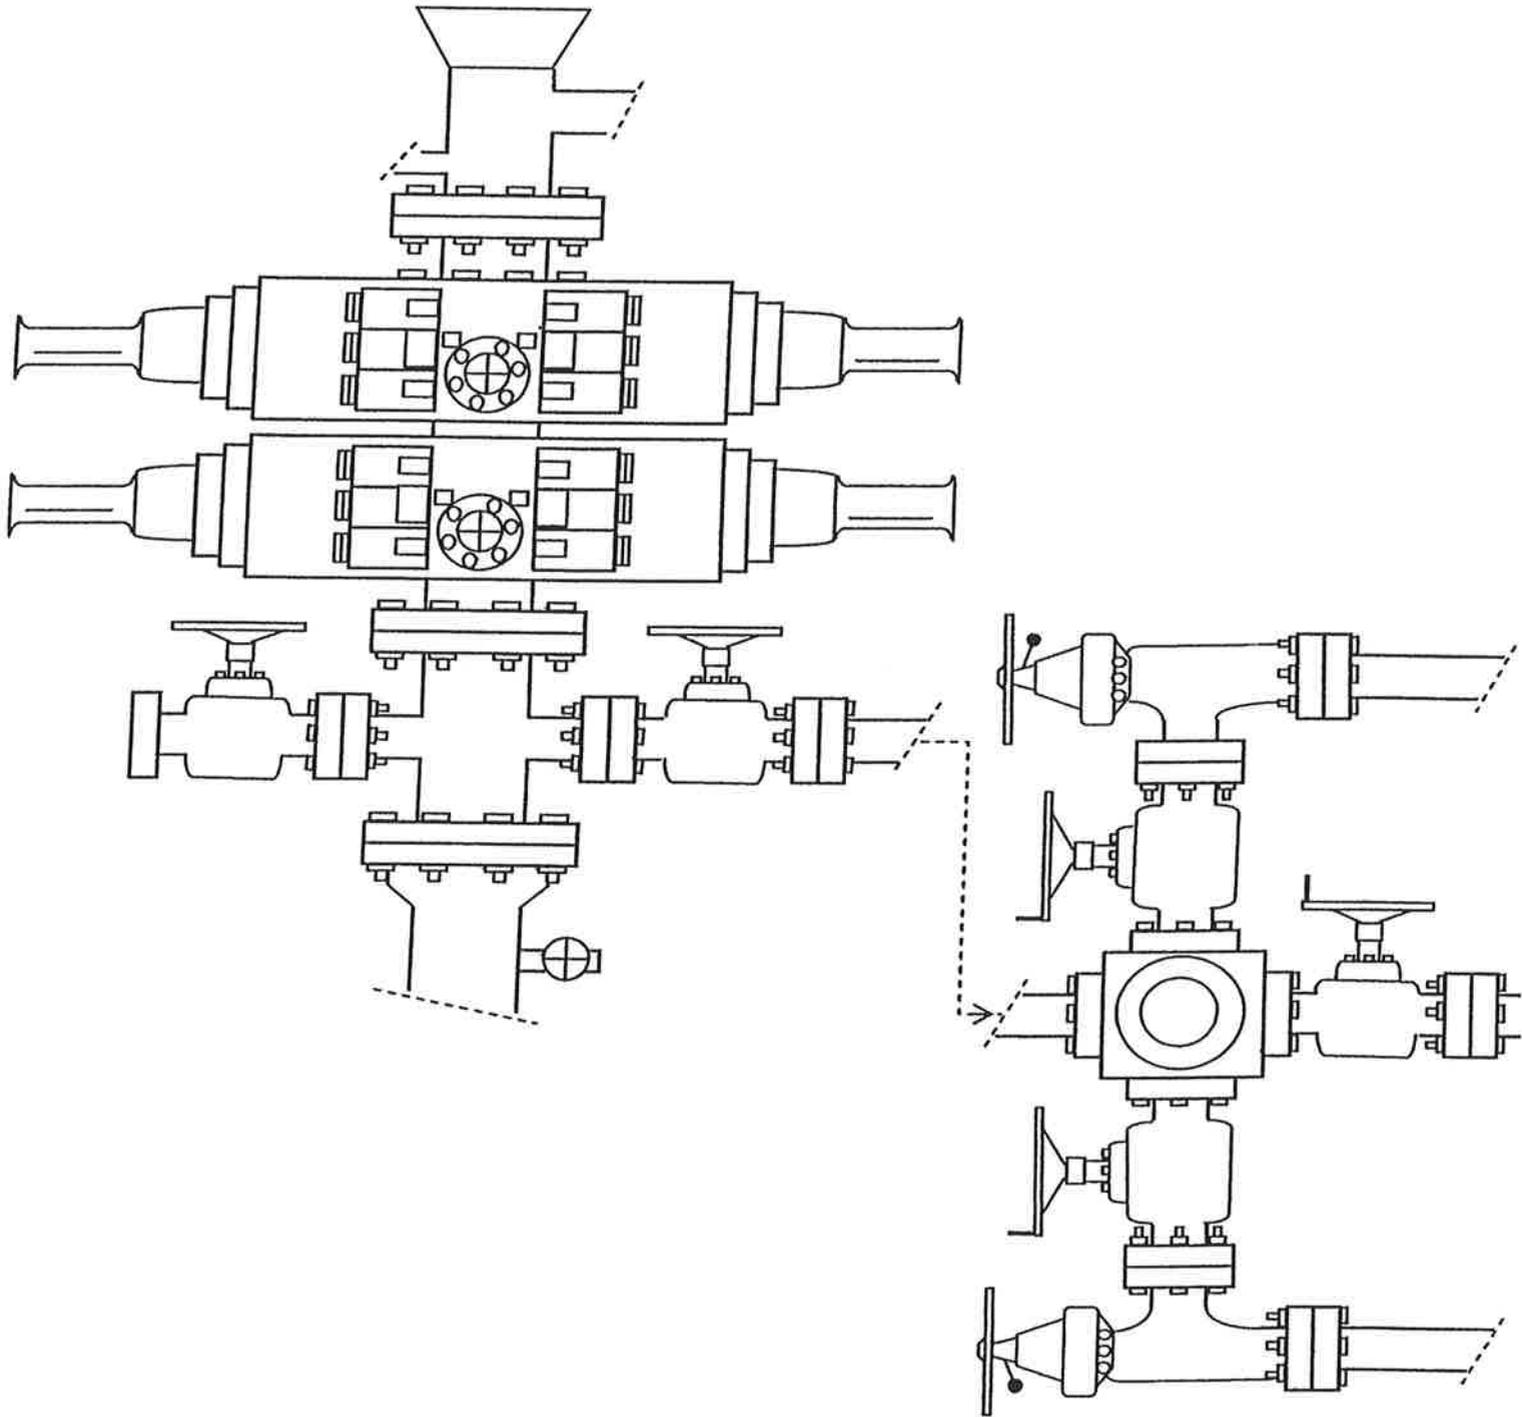


EXHIBIT C




NEWFIELD
Exploration Company

Ute Tribal 9-30-4-1E
SEC. 30, T4S, R1E, U.S.B.&M.

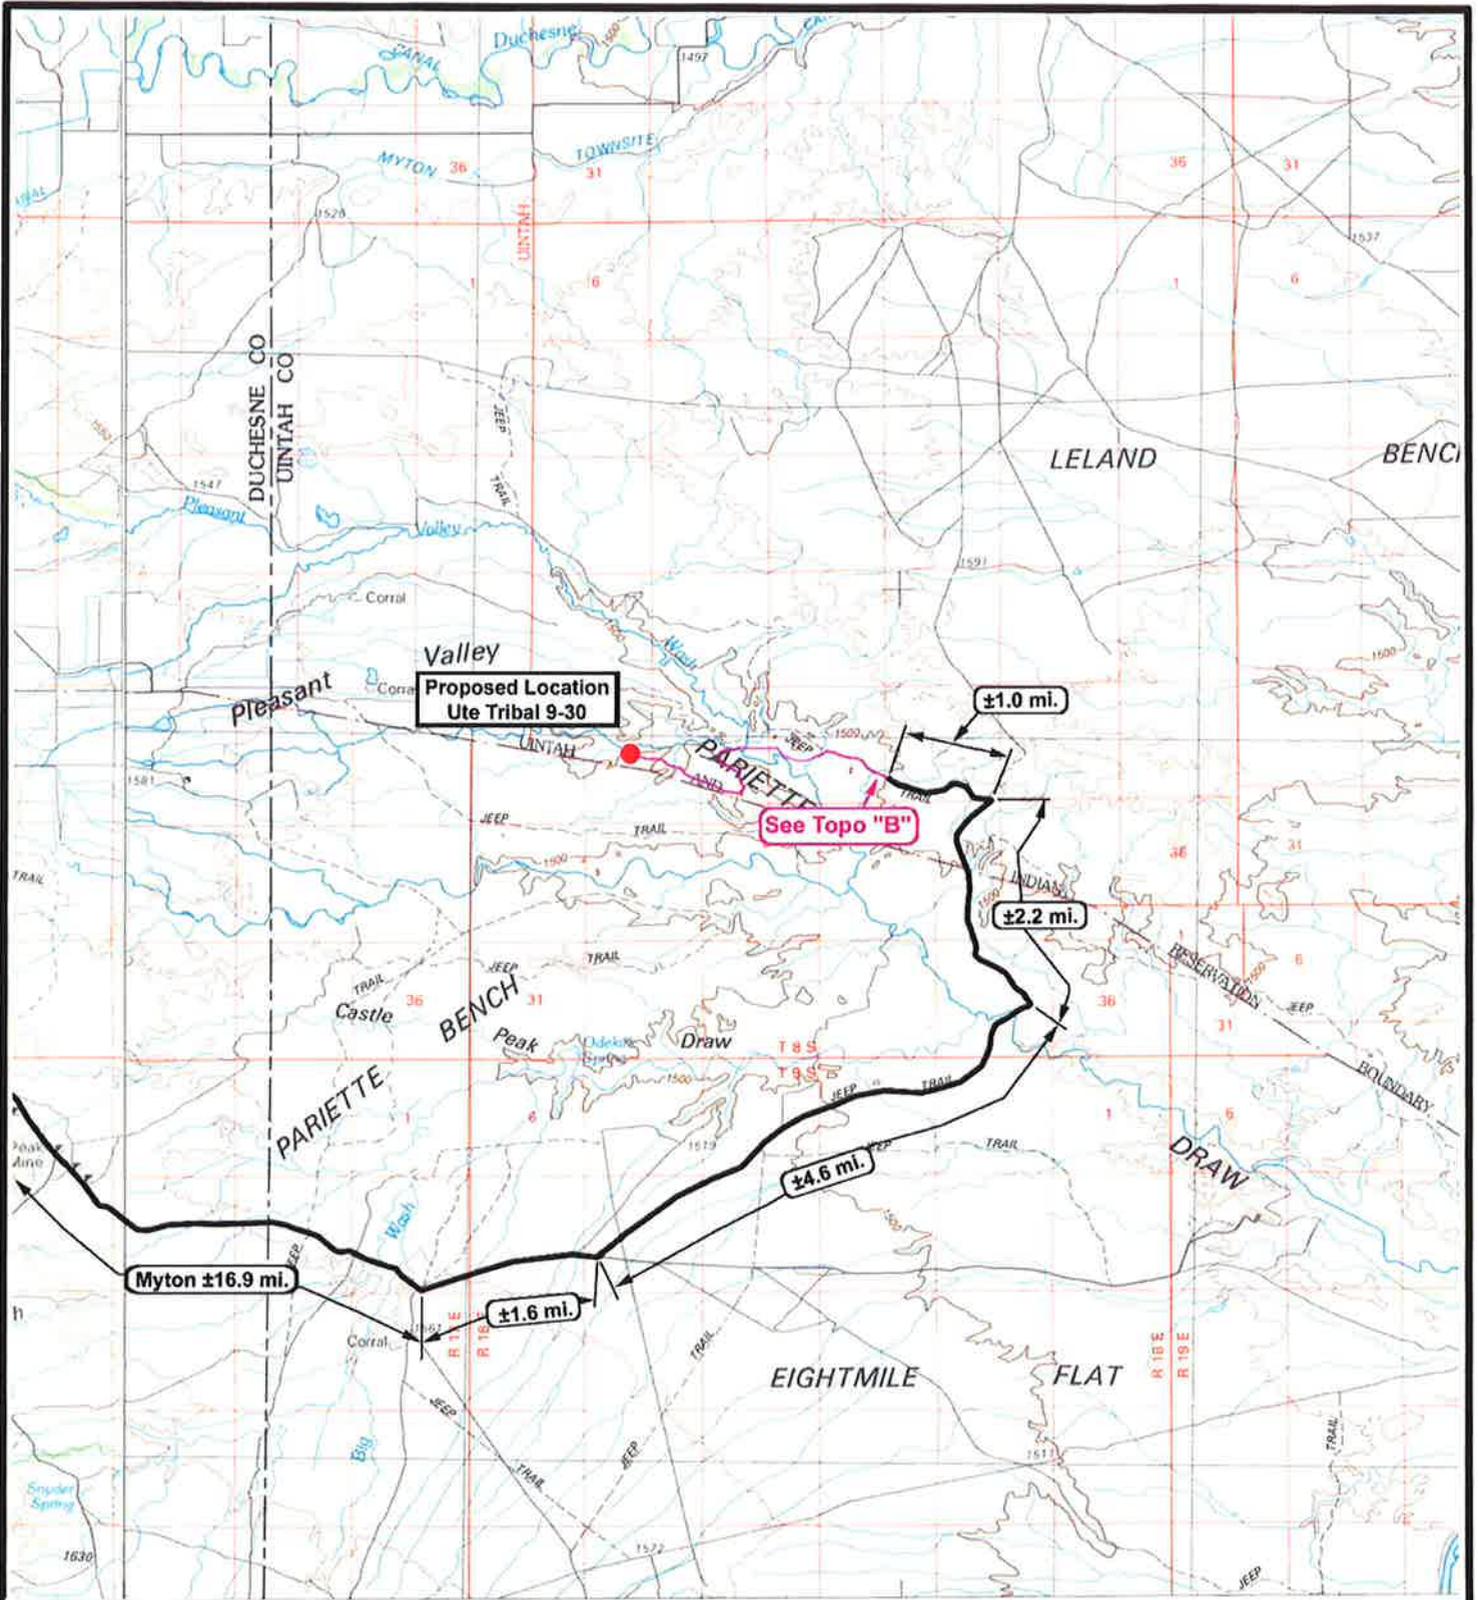



Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1 = 100,000
DRAWN BY: mw
DATE: 01-19-2009

Legend

- Existing Road
- Proposed Access

TOPOGRAPHIC MAP
"A"

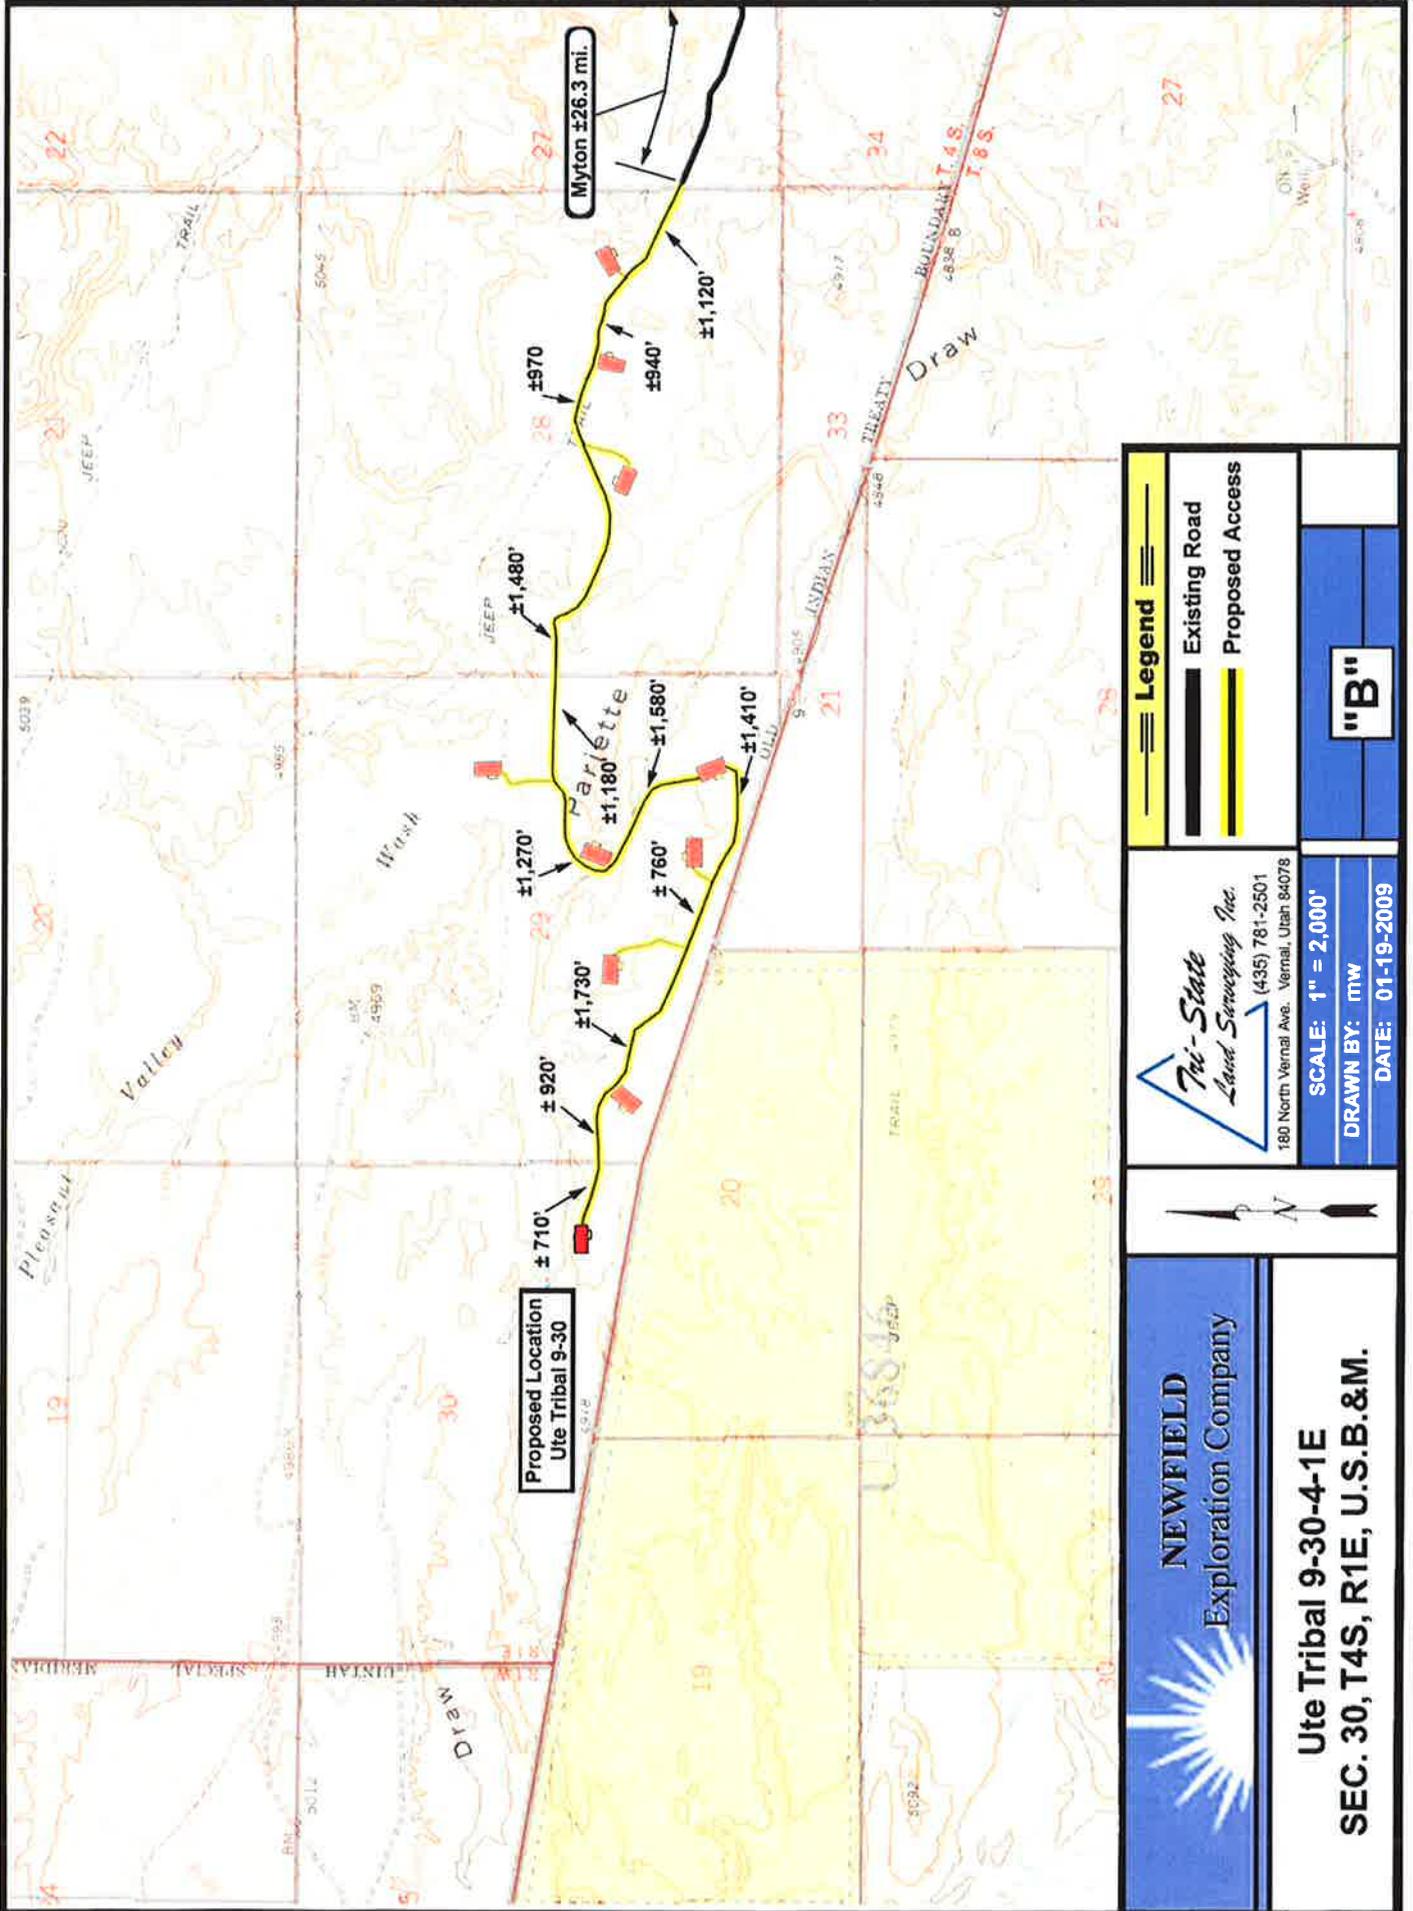

Legend

- Existing Road
- Proposed Access

Tri-State Land Surveying Inc.
 (435) 781-2501
 180 North Vernal Ave. Vernal, Utah 84078


SCALE: 1" = 2,000'
DRAWN BY: MW
DATE: 01-19-2009



NEWFIELD
 Exploration Company

Ute Tribal 9-30-4-1E
SEC. 30, T4S, R1E, U.S.B.&M.

"B"

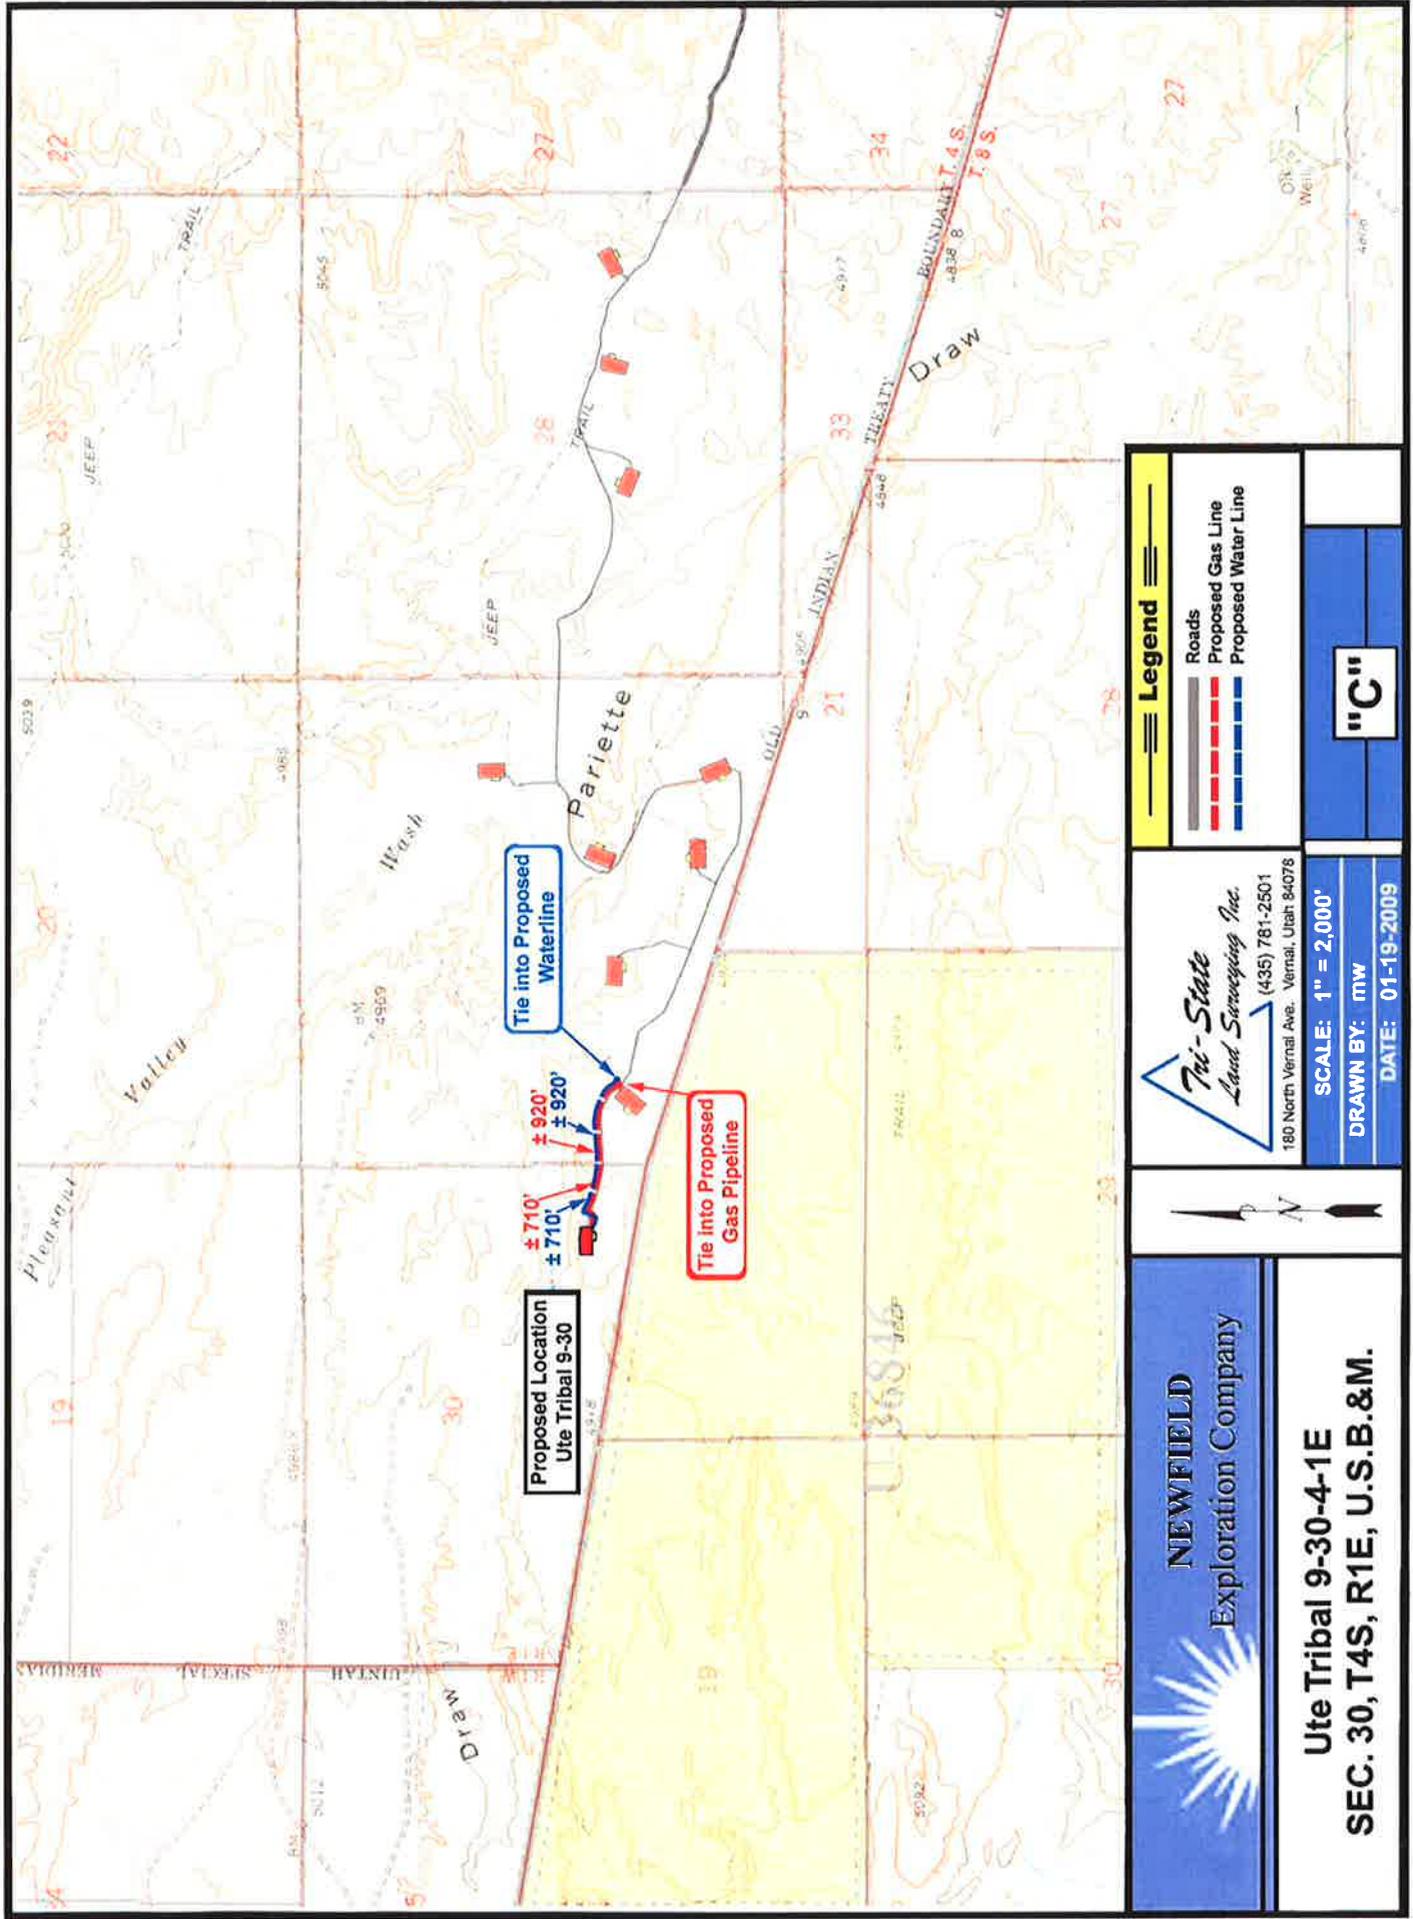

Proposed Location
Ute Tribal 9-30

Tie into Proposed
Waterline

Tie into Proposed
Gas Pipeline

± 710'
± 710'
± 920'
± 920'

Legend

- Roads
- Proposed Gas Line
- Proposed Water Line

Tri-State
Land Surveying Inc.
180 North Vernal Ave. Vernal, Utah 84078
(435) 781-2501


SCALE: 1" = 2,000'
DRAWN BY: mw
DATE: 01-19-2009




NEWFIELD
Exploration Company

Ute Tribal 9-30-4-1E
SEC. 30, T4S, R1E, U.S.B.&M.

"C"

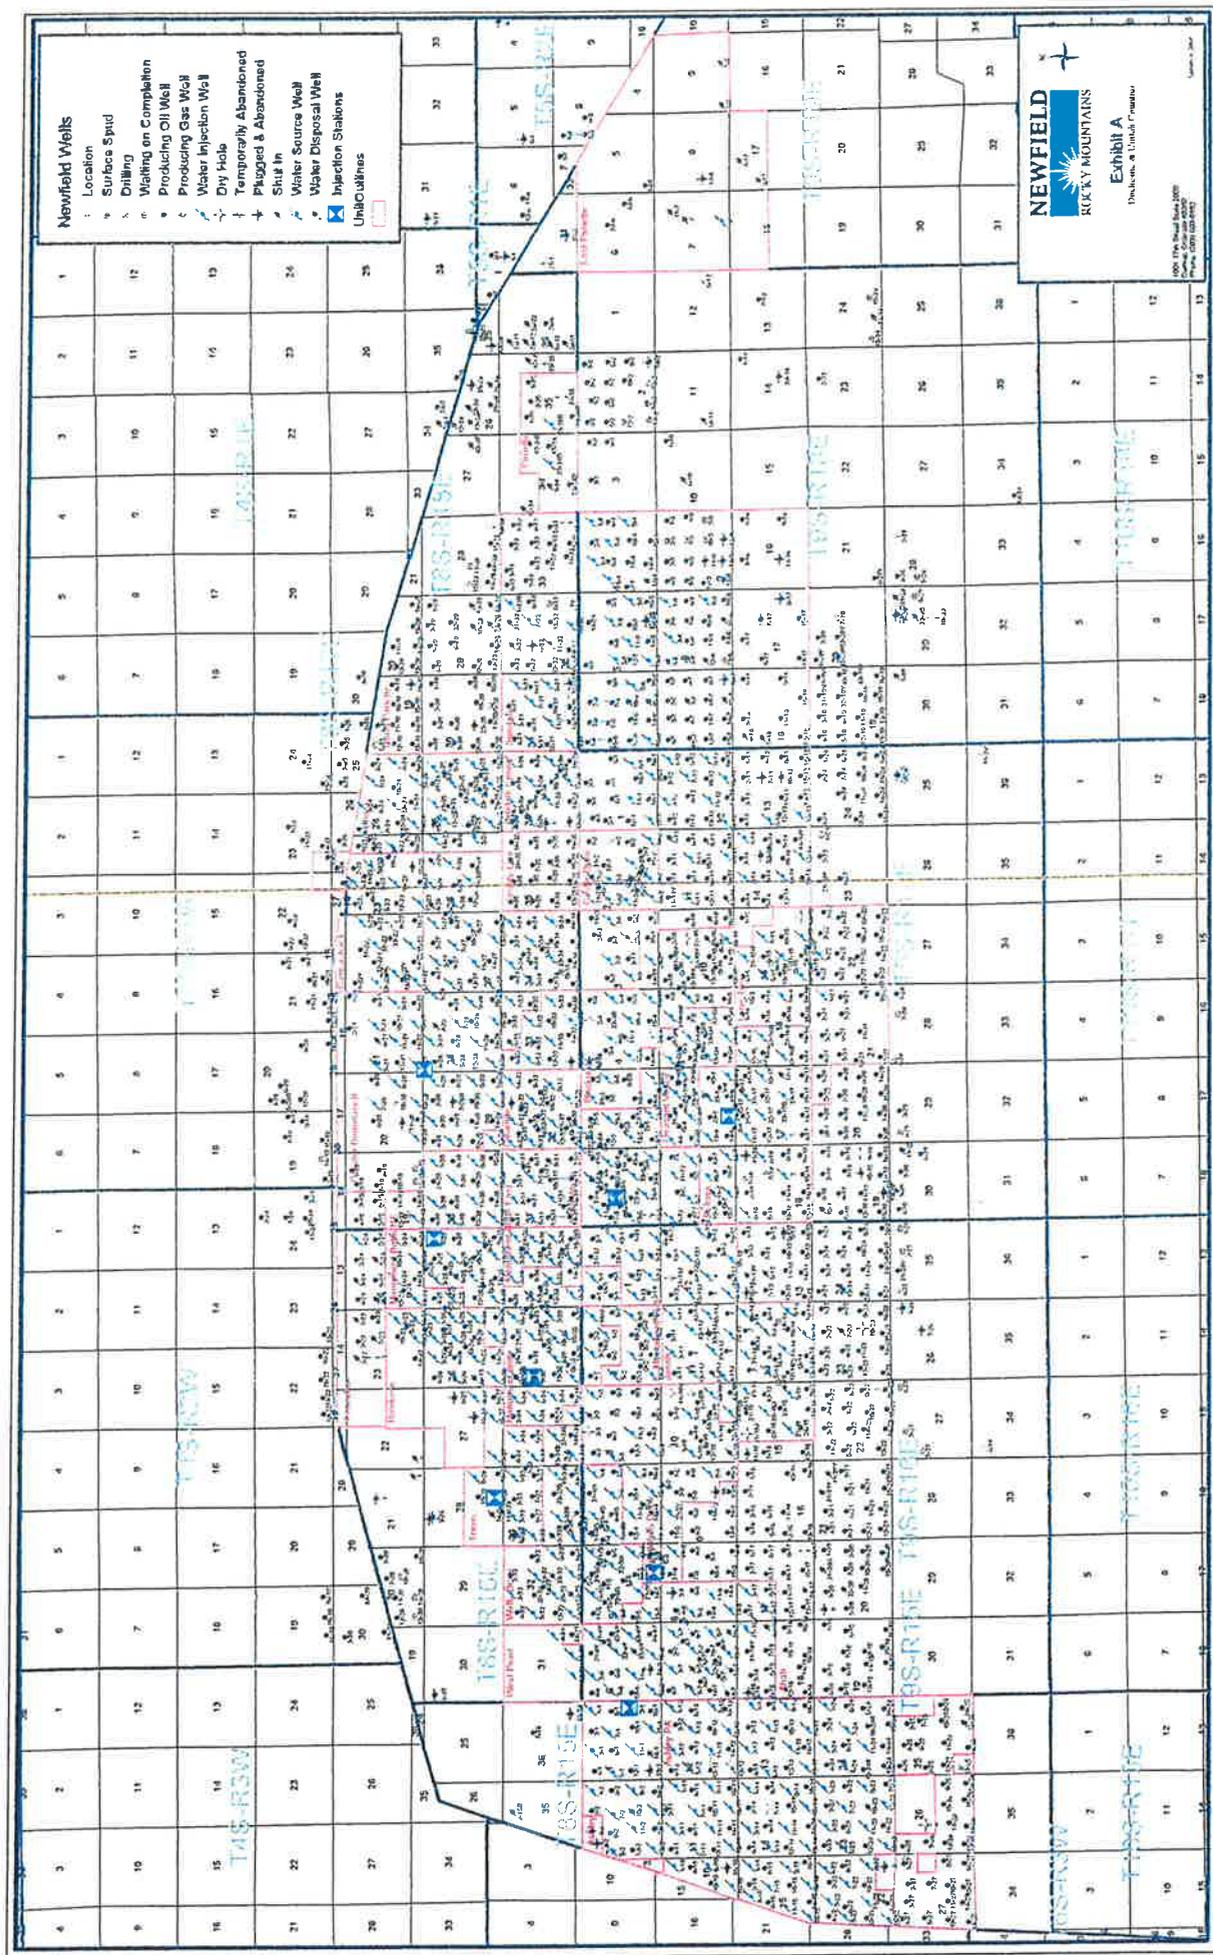

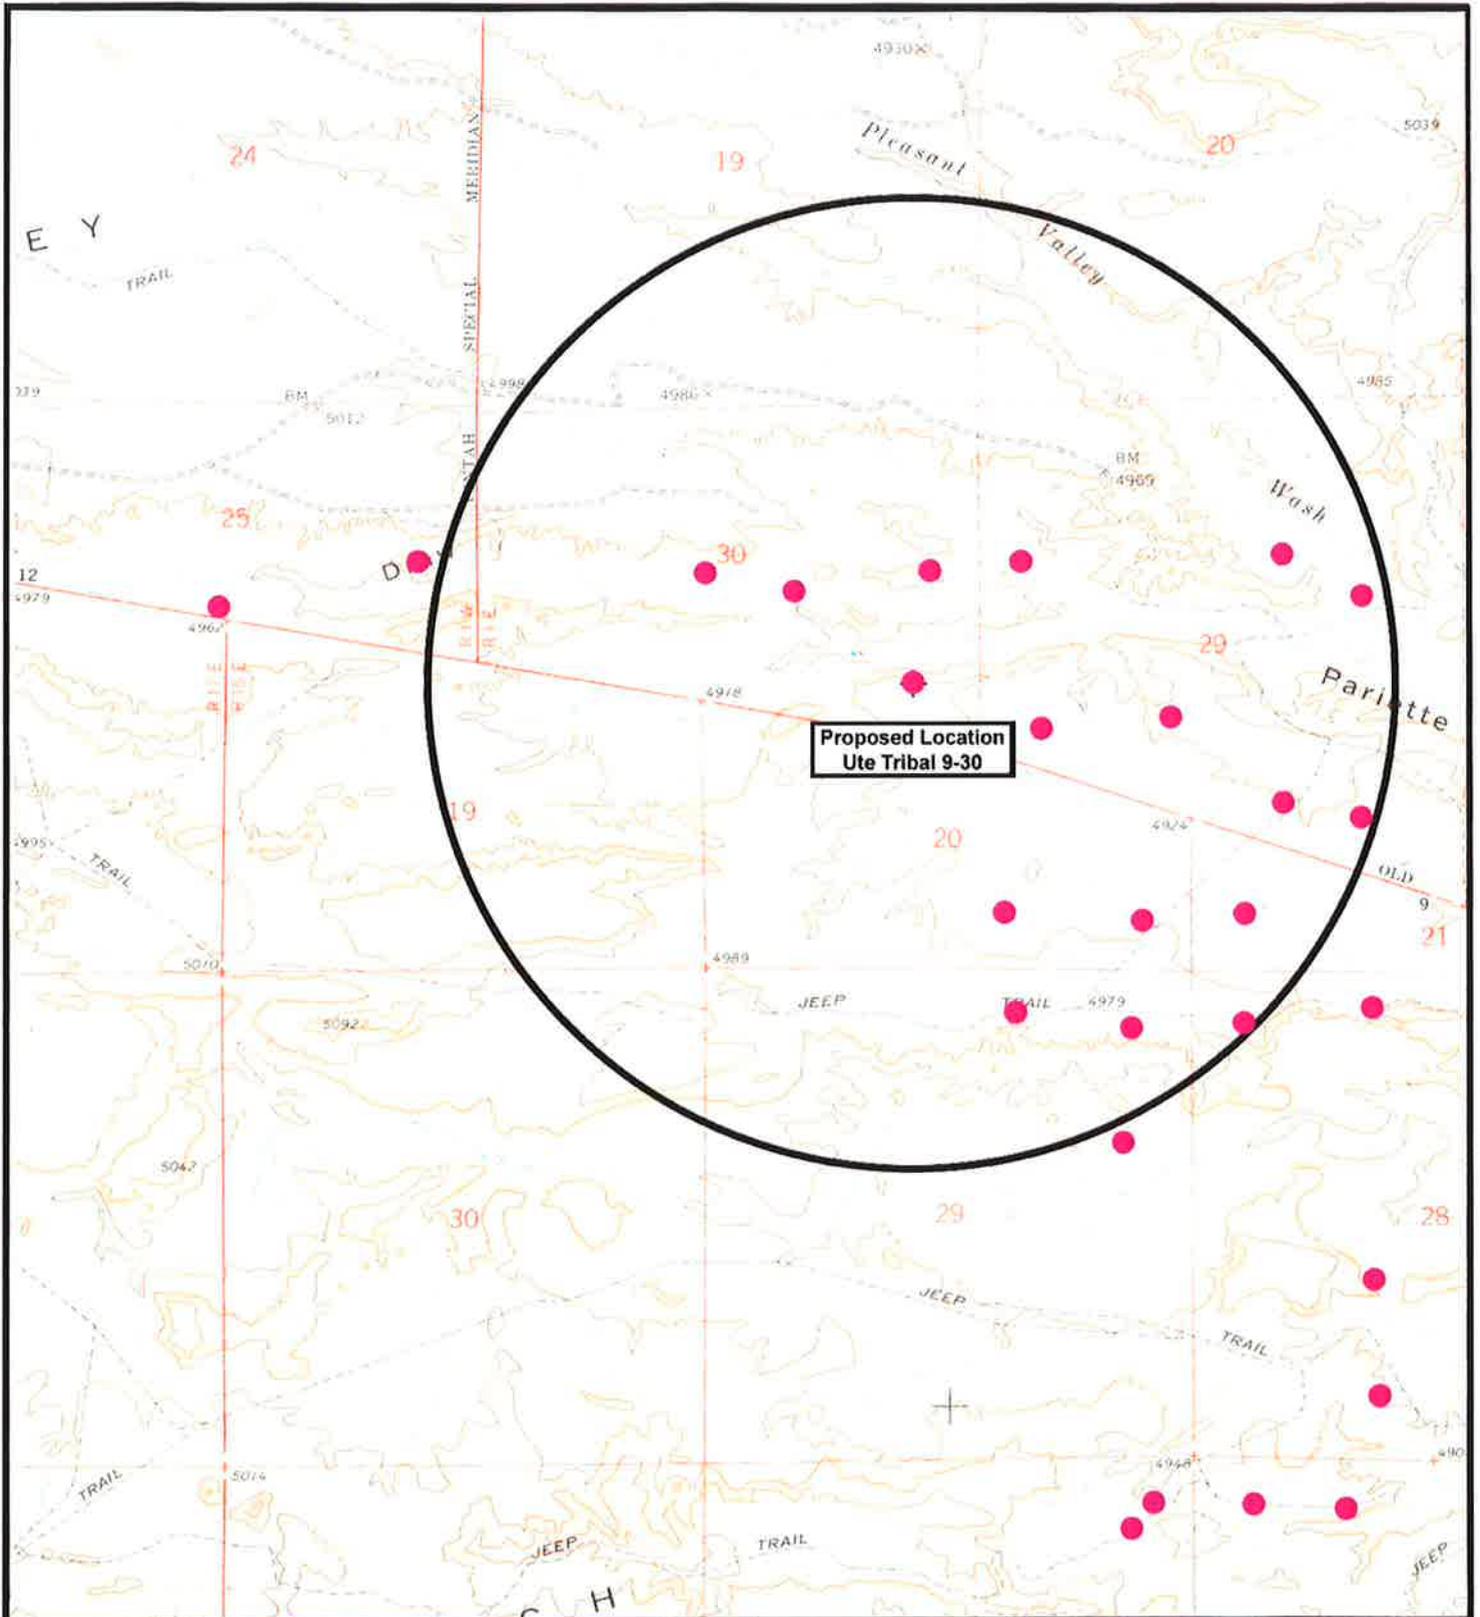

NEWFIELD
Exploration Company

Ute Tribal 9-30-4-1E
SEC. 30, T4S, R1E, U.S.B.&M.



Tri-State
Land Surveying Inc.
(435) 781-2501
180 North Vernal Ave. Vernal, Utah 84078

SCALE: 1" = 2,000'
DRAWN BY: mw
DATE: 01-19-2009

Legend

- Location
- One-Mile Radius

Exhibit "B"

**NEWFIELD PRODUCTION COMPANY
UTE TRIBAL 9-30-4-1E
NE/SE (LOT #5) SECTION 30, T4S, R1E
UINTAH COUNTY, UTAH**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site Ute Tribal 9-30-4-1E located in the NE 1/4 SE 1/4 Section 30, T4S, R1E, Uintah County, Utah:

Proceed in a southeasterly direction out of Myton, approximately 16.9 miles to the junction of this road and an existing road to the northeast; proceed northeasterly approximately 1.6 miles to it's junction with an existing road to the north; proceed northeasterly approximately 4.6 miles to it's junction with an existing road to the northwest; proceed northwesterly approximately 2.2 miles to it's junction with an existing road to the northwest; proceed northwesterly approximately 1.0 miles to it's junction with the beginning of proposed access road to the northwest; proceed in a northwesterly direction along the proposed access road approximately 14,070' to the propose well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

2. PLANNED ACCESS ROAD

Approximately 14,070' of access road is proposed for the proposed well. See attached **Topographic Map "B"**.

The proposed access road will be an 18' crown road (9' either side of the centerline) with drainage ditches along either side of the proposed road whether it is deemed necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area. The maximum grade will be less than 8%.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District
Water Right : 43-7478

Neil Moon Pond
Water Right: 43-11787

Newfield Collector Well
Water Right: 41-3530 (A30414DV, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site.

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

Immediately upon first production, all produced water will be confined to a steel storage tank. If the production water meets quality guidelines, it is transported to the Ashley, Monument Butte, Jonah, and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project.

Water not meeting quality criteria, is disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), State of Utah approved surface disposal facilities, or Federally approved surface disposal facilities.

8. **ANCILLARY FACILITIES**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT**

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. **PLANS FOR RESTORATION OF SURFACE:**

- a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be

reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP** – The Rex and LaRue Lamb Trust.
See attached Memorandum of Surface Use Agreement and Easement ROW.

12. **OTHER ADDITIONAL INFORMATION**

Newfield Production Company requests 14,070' of disturbed area be granted to allow for construction of the planned access road. **Refer to Topographic Map "B"**. A permanent width of 30' and a running surface of 18' is proposed for the planned access road. The construction phase of the planned access road will last approximately (5) days. The planned access road will be an 18' crown road (9' either side of the centerline) with drainage ditches along either side of the proposed road whether it is deemed necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area. The maximum grade will be less than 8%. There will be no culverts required along this access road. There will be barrow ditches and turnouts as needed along this road. There are no fences encountered along this proposed road. There will be no new gates or cattle guards required. All construction material for this access road will be borrowed material accumulated during construction of the access road.

Newfield Production Company requests 1,630' of disturbed area be granted for construction of the proposed gas lines. It is proposed that the disturbed area will temporarily be 50' wide to allow for construction of a 6" gas gathering line, and a 3" poly fuel gas line, with a permanent width of 30' upon completion of the proposed gas lines. The construction phase of the proposed gas lines will last approximately (5) days. Both proposed lines will tie in to the existing pipeline infrastructure. **Refer to Topographic Map "C."**

Newfield Production Company requests 1,630' of disturbed area be granted to allow for construction of the proposed water lines. It is proposed that the disturbed area will temporarily be 50' wide to allow for construction of a buried 3" steel water injection line and a buried 3" poly water return line and 30' wide upon completion of the proposed water lines. Both proposed lines will tie in to the existing pipeline infrastructure. **Refer to Topographic Map "C."** In the event that the proposed well is converted to a water injection well, a separate injection permit will be applied for through the proper agencies.

- a) Newfield Production Company is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, Newfield is to immediately stop work that might further disturb such materials and contact the Authorized Officer.
- b) Newfield Production will control noxious weeds along rights-of-way for roads, pipelines, well sites or other applicable facilities. On State administered land it is required that a Pesticide Use Proposal shall be submitted and given approval prior to the application of herbicides or other possible hazardous chemicals.
- c) Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on State Lands after the conclusion of drilling operations or at any other time without State authorization. However, if State authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

The Archaeological and Paleontological Report Waivers are attached.

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the Ute Tribal 9-30-4-1E, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the Ute Tribal 9-30-4-1E, Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

The State office as well as the Ute Tribe Energy and Mineral Department shall be notified upon site completion prior to moving on the drilling rig.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

Representative

Name: Tim Eaton
Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification

Please be advised that Newfield Production Company is considered to be the operator of well #9-30-4-1E, NE/SE Section 30, T4S, R1E, Uintah County, Utah and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage for this well is covered by the Bureau of Indian Affairs Bond #RLB0010462.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.



4/20/10
Date


Mandie Crozier
Regulatory Specialist
Newfield Production Company

NEWFIELD PRODUCTION COMPANY

UTE TRIBAL 9-30-4-1E

Section 30, T4S, R1E, U.S.B.&M.

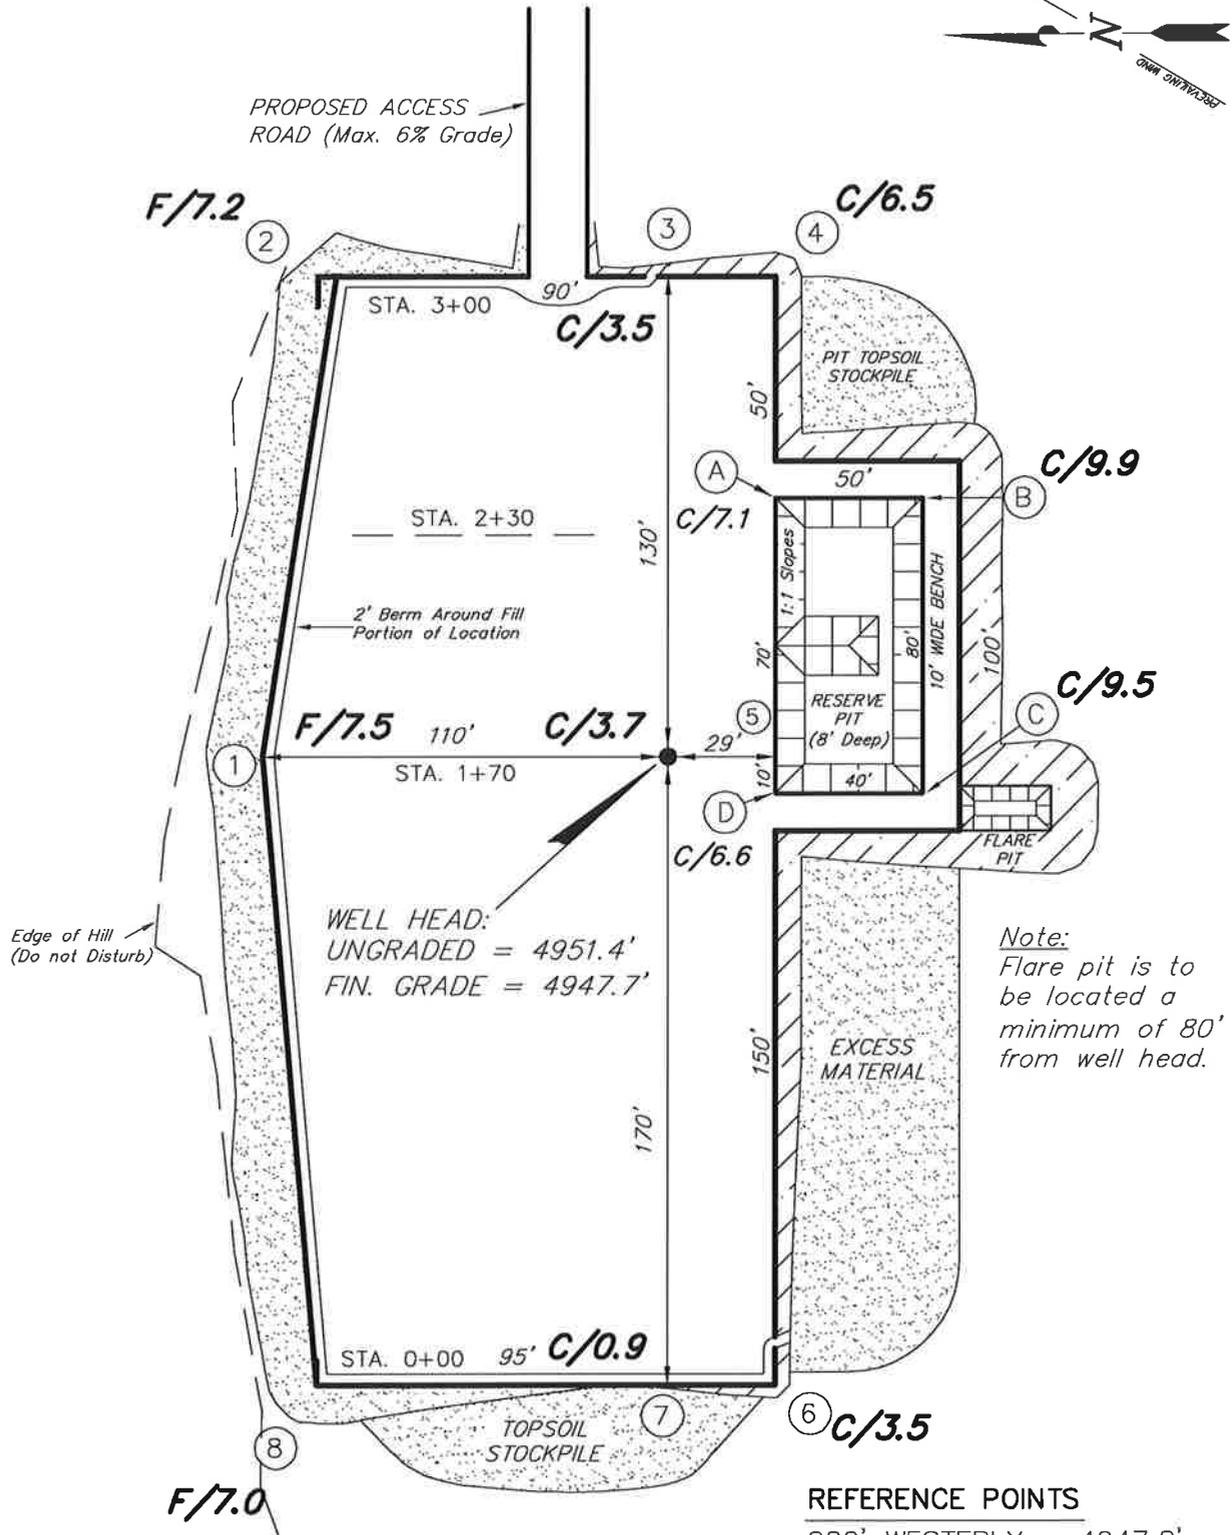

WELL HEAD:
UNGRADED = 4951.4'
FIN. GRADE = 4947.7'

Note:
Flare pit is to be located a minimum of 80' from well head.





REFERENCE POINTS
220' WESTERLY - 4947.8'
270' WESTERLY - 4946.9'
130' NORTHERLY - 4936.7'

SURVEYED BY: C.M.	DATE SURVEYED: 12-28-08
DRAWN BY: M.W.	DATE DRAWN: 1-13-09
SCALE: 1" = 50'	REVISED:

Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD PRODUCTION COMPANY

CROSS SECTIONS UTE TRIBAL 9-30-4-1E

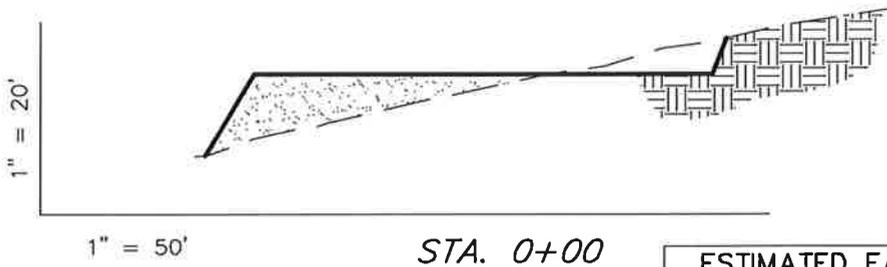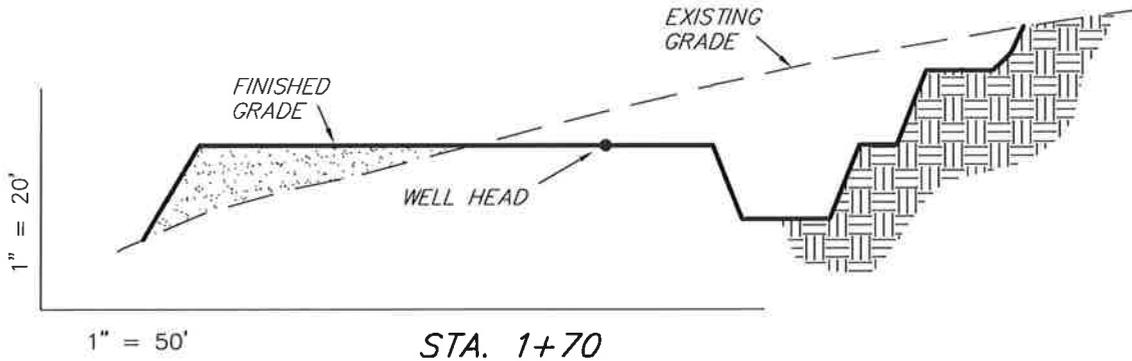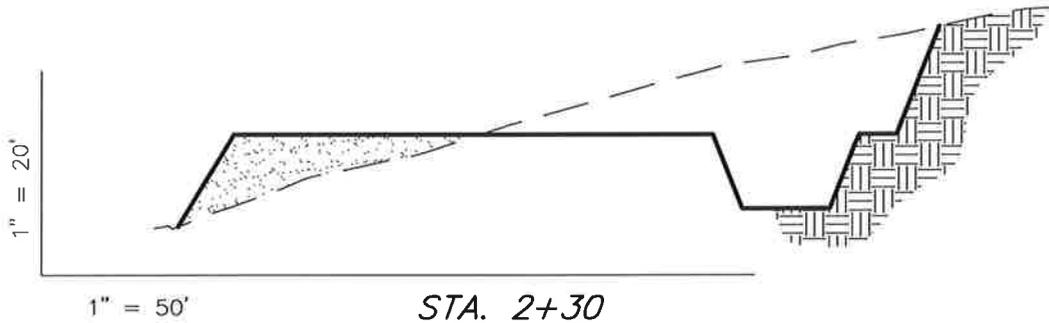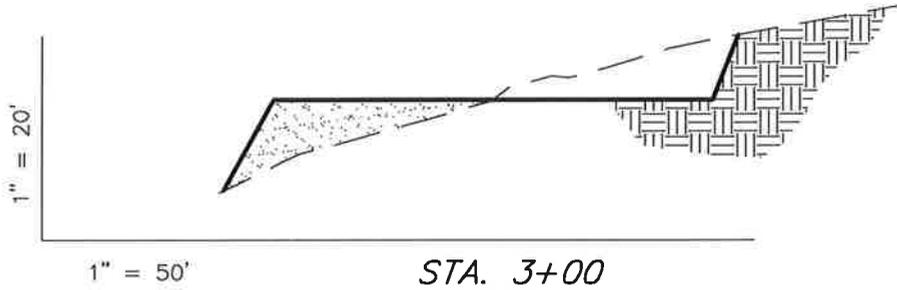

ESTIMATED EARTHWORK QUANTITIES (No Shrink or swell adjustments have been used) (Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	4,020	4,020	Topsoll is not included in Pad Cut	0
PIT	640	0		640
TOTALS	4,660	4,020	1,000	640

NOTE:
UNLESS OTHERWISE NOTED
CUT SLOPES ARE AT 1:1
FILL SLOPES ARE AT 1.5:1


SURVEYED BY: C.M.	DATE SURVEYED: 12-28-08
DRAWN BY: M.W.	DATE DRAWN: 1-13-09
SCALE: 1" = 50'	REVISED:

Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078


NEWFIELD PRODUCTION COMPANY

TYPICAL RIG LAYOUT

UTE TRIBAL 9-30-4-1E



PROPOSED ACCESS ROAD (Max. 6% Grade)

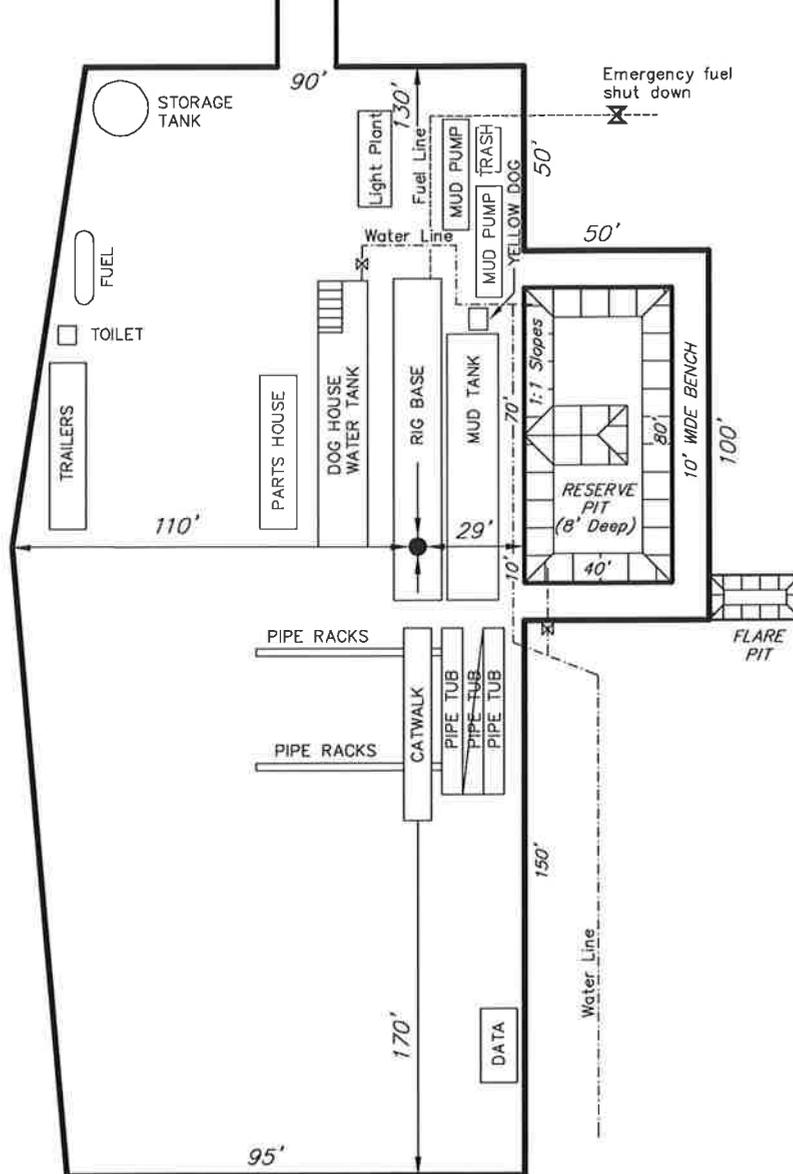

SURVEYED BY: C.M.	DATE SURVEYED: 12-28-08
DRAWN BY: M.W.	DATE DRAWN: 1-13-09
SCALE: 1" = 50'	REVISED:

(435) 781-2501

Tri State
Land Surveying, Inc.

180 NORTH VERNAL AVE. VERNAL, UTAH 84078


Newfield Production Company Proposed Site Facility Diagram

Ute Tribal 9-30-4-1E

NE/SE (Lot #5) Sec. 30, T4S, R1E

Uintah County, Utah

2OG0005609

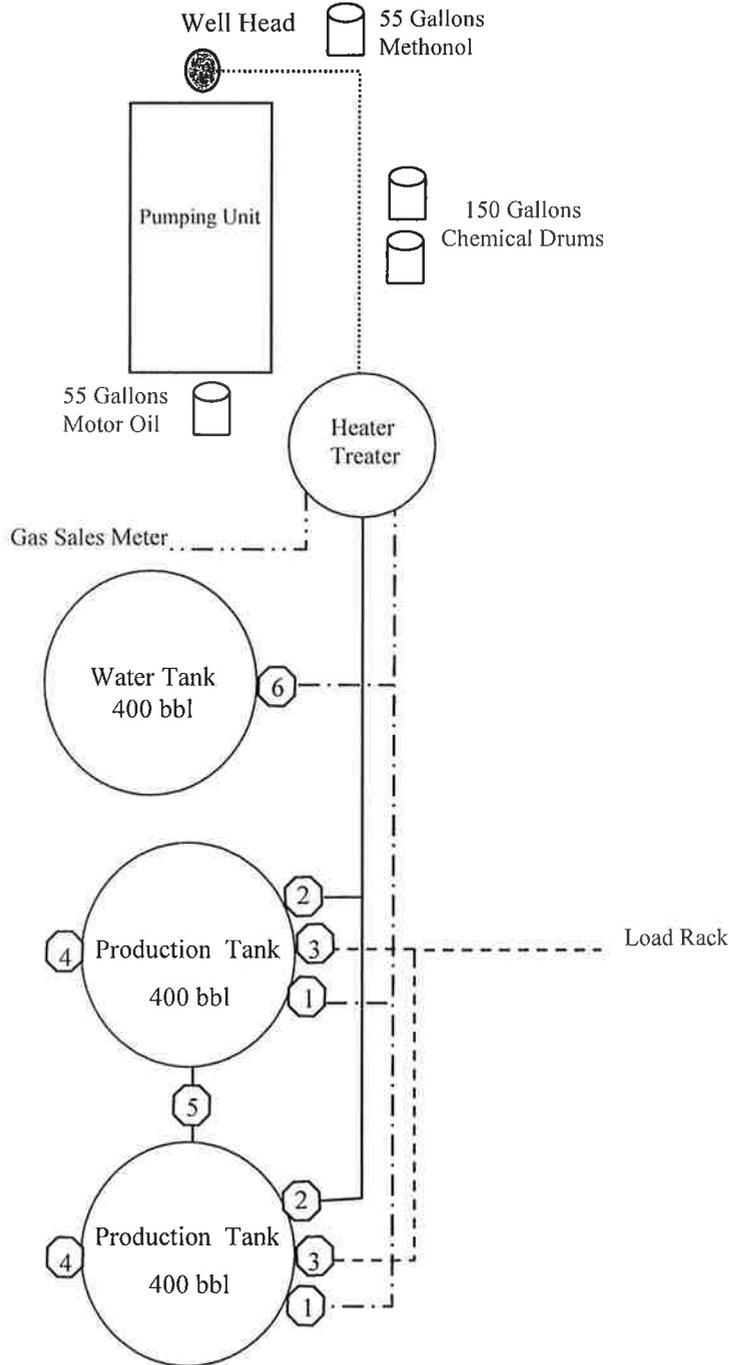

Legend

Emulsion Line
Load Rack	- - - - -
Water Line	- . - . -
Gas Sales	- . - . - .
Oil Line	—————

Production Phase:

- 1) Valves 1, 3, and 4 sealed closed
- 2) Valves 2, 5, and 6 sealed open

Sales Phase:

- 1) Valves 1, 2, 4, 5, and 6 sealed closed
- 2) Valve 3 open

Draining Phase:

- 1) Valves 1 and 6 open

Diked Section



EXHIBIT D

Township 4 South, Range 1 East
Section 30 Lot 4 & 5

Uintah County, Utah
Being 53.65 acres, more or less

ARCHAEOLOGICAL & PALEOTOLOGICAL REPORT WAIVER

For the above referenced location; **Rex and LaRue Lamb Trust, Karl Lamb, trustee whose address is PO Box 374, Myton Utah 84052**, the Private Surface Owner. (Having a Surface Owner Agreement with Newfield Production Company)

Karl Lamb, representing this entity does agree to waive the request from the State of Utah and Bureau of Land Management for an Archaeological/Cultural and Paleotological Resource Survey for any wells covered by the Surface Use Agreement dated 1/22/09 between the above said private land owner and Newfield Production. This waiver hereby releases Newfield Production Company from this request.

Karl Lamb 1-22-09
Karl Lamb, Trustee Date
Rex and LaRue Lamb Trust

Brad Mecham 1-22-09
Brad Mecham Date
Newfield Production Company

API Number: 4304751059

Well Name: Ute Tribal 9-30-4-1E

Township 04.0 S Range 01.0 E Section 30



Meridian: UBM

Operator: NEWFIELD PRODUCTION COMPANY

Map Prepared:

Map Produced by Diana Mason

Units	Wells Query
STATUS	-call other values-
ACTIVE	APD - Approved Permit
EXPLORATORY	DRL - Spudded (Drilling Commenced)
GAS STORAGE	GIW - Gas Injection
NF PP OIL	GS - Gas Storage
NF SECONDARY	LA - Location Abandoned
PI OIL	LOC - New Location
PP GAS	OPS - Operation Suspended
PP GEOTHERMAL	PA - Plugged Abandoned
PP OIL	PGW - Producing Gas Well
SECONDARY	POW - Producing Oil Well
TERMINATED	RET - Returned APD
Fields	SGW - Shut-in Gas Well
Sections	SOW - Shut-in Oil Well
Township	TA - Temp. Abandoned
	TW - Test Well
	WDW - Water Disposal
	WW - Water Injection Well
	WSW - Water Supply Well

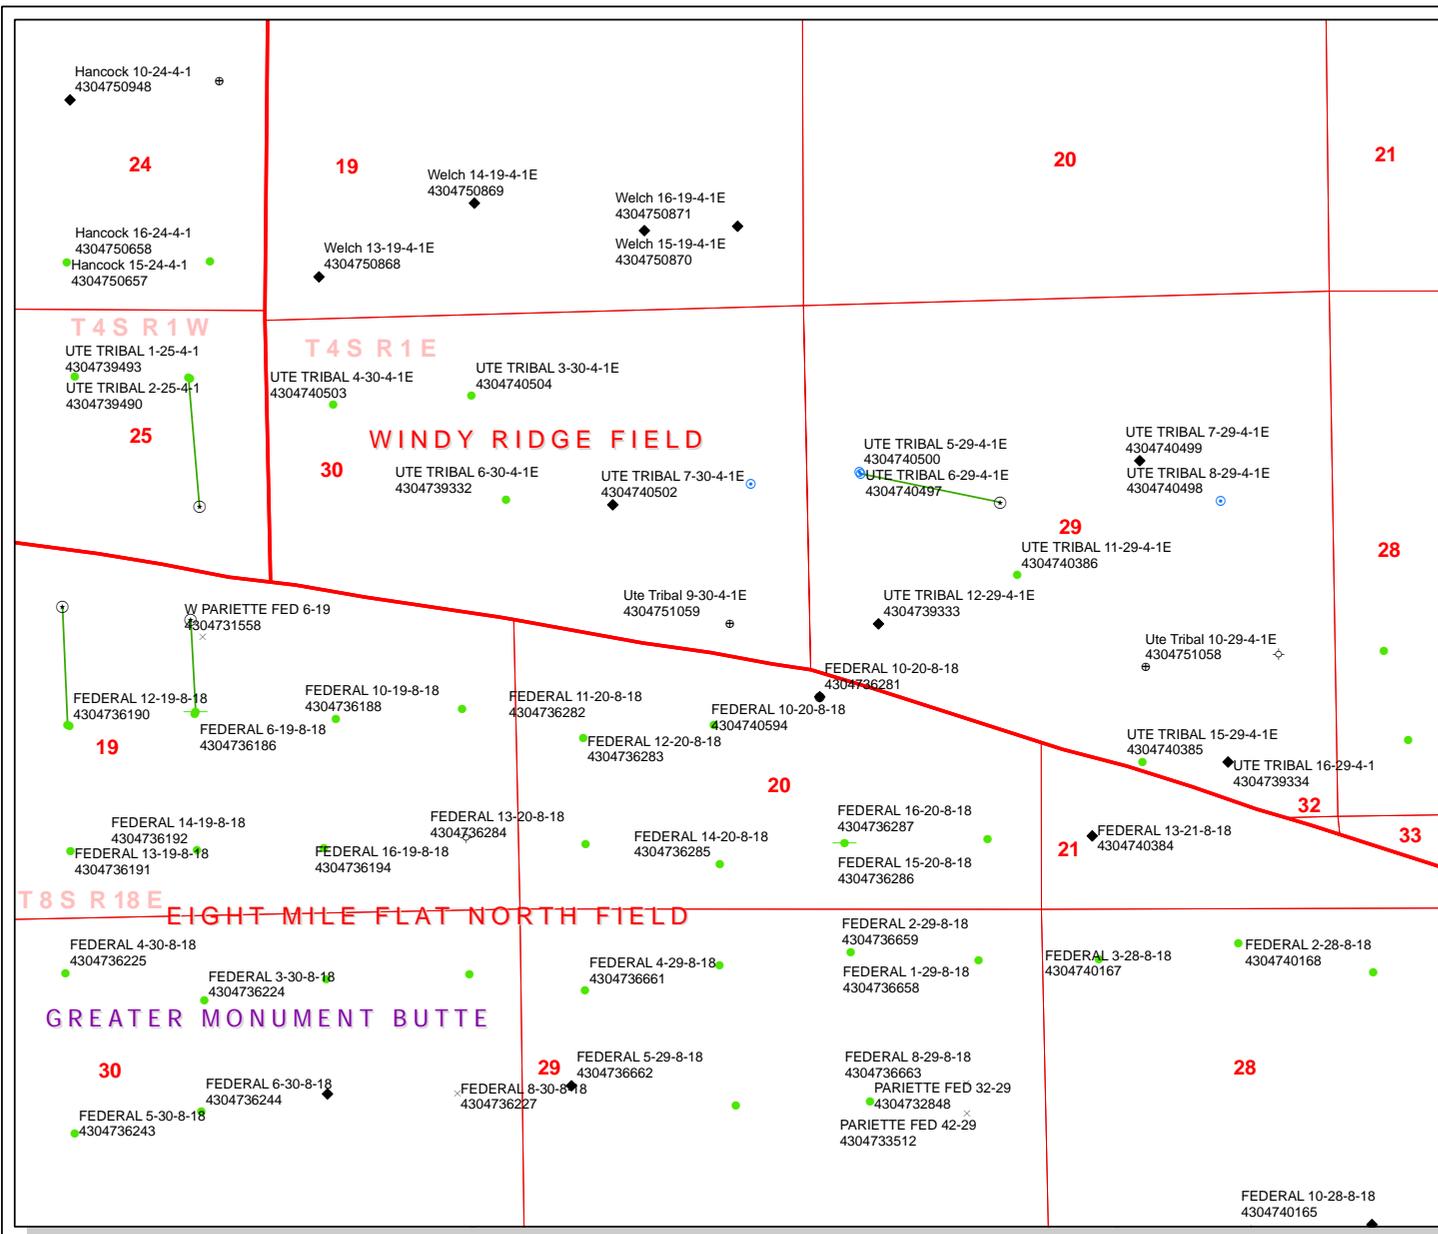

ON-SITE PREDRILL EVALUATION

Utah Division of Oil, Gas and Mining

Operator	NEWFIELD PRODUCTION COMPANY				
Well Name	Ute Tribal 9-30-4-1E				
API Number	43047510590000	APD No	2564	Field/Unit	WINDY RIDGE
Location: 1/4,1/4	NESE	Sec 30	Tw 4.0S	Rng 1.0E	470 FSL 813 FEL
GPS Coord (UTM)	592187	4439727	Surface Owner	Rex and LaRue Lamb Trust	

Participants

Floyd Bartlett (DOGM), Jeff Henderson (Newfield Permitting), Scott Vernon (Tri-State Land Surveying), Christine Cimiluca and Cheryl Laroque (BLM).

Regional/Local Setting & Topography

The proposed location is approximately 29.7 road miles southeast of Myton, UT in the Pariette Draw area of lower Pleasant Valley. It is also about 14 air miles south east of Roosevelt, Utah. Pariette Draw is approximately 500 feet to the north. This draw contains a perennial stream somewhat consisting of irrigation runoff and seepage. It runs into the Green River approximately 9 miles downstream above Ouray, Utah. Poorly vegetated or barren flats surrounded by low hills characterize the local area. Access is by State and County and planned or existing oil field development roads. Approximately 1,630 feet of new road will be constructed to reach the site.

The pad for the proposed Ute Tribal 9-30-45-1 oil well is laid out in an east to west direction on the north slope of a ridge which breaks sharply off into the bottom lands of Pariette Wash on the north. The drop-off occurs about 30 feet north of the pad. The location has been angled from corner 1 both ways to avoid this drop-off. The pad also has been reduced 15 feet from the desired width. Care must be exercised not to push excavated materials beyond the drop-off. Although reduced in size, the location appears to be suitable for drilling and operating the proposed well. No springs, streams or seeps occur in the immediate area.

The Lamb Family Trust owns the surface of the location. The BLM contacted Mr. Karl Lamb by telephone and invited him to the pre-site visit. He said he would not attend. A signed landowner agreement exists. The minerals are owned by the United States Government and held in trust for the Ute Indian Tribe.

Surface Use Plan

Current Surface Use
Wildlife Habitat

New Road Miles	Well Pad	Src Const Material	Surface Formation
0.3	Width 189 Length 300	Onsite	UNTA

Ancillary Facilities N

Waste Management Plan Adequate?

Environmental Parameters

Affected Floodplains and/or Wetlands N

Flora / Fauna

Plants include greasewood, mat saltbrush, cymopteris spp. broom snakeweed, Indian ricegrass, rabbit brush, spiny hopsage, mormon tea, wild onion and spring annuals.

Prairie dogs, antelope, small mammals and birds.

Soil Type and Characteristics

Surface soils hummocky sandy loam.

Erosion Issues N

Sedimentation Issues N

Site Stability Issues N

Drainage Diversion Required? N

Berm Required? Y

Erosion Sedimentation Control Required? N

Paleo Survey Run? N **Paleo Potential Observed?** N **Cultural Survey Run?** N **Cultural Resources?**

Reserve Pit

Site-Specific Factors

Site Ranking

Distance to Groundwater (feet)	100 to 200	5	
Distance to Surface Water (feet)	200 to 300	10	
Dist. Nearest Municipal Well (ft)	1320 to 5280	5	
Distance to Other Wells (feet)	>1320	0	
Native Soil Type	Mod permeability	10	
Fluid Type	Fresh Water	5	
Drill Cuttings	Normal Rock	0	
Annual Precipitation (inches)		0	
Affected Populations			
Presence Nearby Utility Conduits	Not Present	0	
Final Score		35	1 Sensitivity Level

Characteristics / Requirements

A 40' x 80' x 8' deep reserve pit is located in an area of cut on the southwest side of the location. A pit liner is required. Newfield commonly uses a 16-mil liner.

Closed Loop Mud Required? N **Liner Required?** Y **Liner Thickness** 16 **Pit Underlayment Required?** Y

Other Observations / Comments

ATV's used to access the site.

Floyd Bartlett
Evaluator

5/13/2010
Date / Time

Application for Permit to Drill

Statement of Basis

5/25/2010

Utah Division of Oil, Gas and Mining

Page 1

APD No	API WellNo	Status	Well Type	Surf Owner	CBM
2564	43047510590000	LOCKED	OW	P	No
Operator	NEWFIELD PRODUCTION COMPANY		Surface Owner-APD	Rex and LaRue Lamb Trust	
Well Name	Ute Tribal 9-30-4-1E		Unit		
Field	WINDY RIDGE		Type of Work	DRILL	
Location	NESE 30 4S 1E U 470 FSL 813 FEL		GPS Coord (UTM)	592184E 4439676N	

Geologic Statement of Basis

The mineral rights for the proposed well are owned by the Ute Tribe. The BLM will be the agency responsible for evaluating and approving the drilling, casing and cement programs.

Brad Hill
APD Evaluator

5/24/2010
Date / Time

Surface Statement of Basis

The proposed location is approximately 29.7 road miles southeast of Myton, UT in the Pariette Draw area of lower Pleasant Valley. It is also about 14 air miles south east of Roosevelt, Utah. Pariette Draw is approximately 500 feet to the north. This draw contains a perennial stream somewhat consisting of irrigation runoff and seepage. It runs into the Green River approximately 9 miles downstream above Ouray, Utah. Poorly vegetated or barren flats surrounded by low hills characterize the local area. Access is by State and County and planned or existing oil field development roads. Approximately 1,630 feet of new road will be constructed to reach the site.

The pad for the proposed Ute Tribal 9-30-45-1 oil well is laid out in an east to west direction on the north slope of a ridge which breaks sharply off into the bottom lands of Pariette Wash on the north. The drop-off occurs about 30 feet north of the pad. The location has been angled from corner 1 both ways to avoid this drop-off. The pad also has been reduced 15 feet from the desired width. Care must be exercised not to push excavated materials beyond the drop-off. Although reduced in size, the location appears to be suitable for drilling and operating the proposed well. No springs, streams or seeps occur in the immediate area.

The Lamb Family Trust owns the surface of the location. The BLM contacted Mr. Karl Lamb by telephone and invited him to the pre-site visit. He said he would not attend. A signed landowner agreement exists. The minerals are owned by the United States Government and held in trust for the Ute Indian Tribe. Acting for the Ute Indian Tribe, Ms. Christine Cimiluca and Ms. Cheryl Laroque of the BLM attended the pre-site evaluation. They specified the color of paint the facilities were to be painted and had no surface concerns except as noted above. Reclamation will be as contained in the Surface Use Plan.

Floyd Bartlett
Onsite Evaluator

5/13/2010
Date / Time

Conditions of Approval / Application for Permit to Drill

Category	Condition
Pits	A synthetic liner with a minimum thickness of 16 mils with a felt subliner shall be properly installed and maintained in the reserve pit.
Surface	The well site shall be bermed to prevent fluids from leaving the pad.
Surface	The reserve pit shall be fenced upon completion of drilling operations.

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 4/20/2010

API NO. ASSIGNED: 43047510590000

WELL NAME: Ute Tribal 9-30-4-1E

OPERATOR: NEWFIELD PRODUCTION COMPANY (N2695)

PHONE NUMBER: 435 646-4825

CONTACT: Mandie Crozier

PROPOSED LOCATION: NESE 30 040S 010E

Permit Tech Review:

SURFACE: 0470 FSL 0813 FEL

Engineering Review:

BOTTOM: 0470 FSL 0813 FEL

Geology Review:

COUNTY: UINTAH

LATITUDE: 40.10423

LONGITUDE: -109.91845

UTM SURF EASTINGS: 592184.00

NORTHINGS: 4439676.00

FIELD NAME: WINDY RIDGE

LEASE TYPE: 2 - Indian

LEASE NUMBER: 2OG0005609

PROPOSED PRODUCING FORMATION(S): GREEN RIVER

SURFACE OWNER: 4 - Fee

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

- PLAT
- Bond: INDIAN - RLB0010462
- Potash
- Oil Shale 190-5
- Oil Shale 190-3
- Oil Shale 190-13
- Water Permit: 43-7478
- RDCC Review:
- Fee Surface Agreement
- Intent to Commingle


Commingle Approved

LOCATION AND SITING:

- R649-2-3.
 - Unit:**
 - R649-3-2. General
 - R649-3-3. Exception
 - Drilling Unit
 - Board Cause No:** R649-3-2
 - Effective Date:**
 - Siting:**
 - R649-3-11. Directional Drill
-

Comments: Presite Completed
IRR SEC:

Stipulations: 4 - Federal Approval - dmason
5 - Statement of Basis - bhll
23 - Spacing - dmason



State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: Ute Tribal 9-30-4-1E
API Well Number: 43047510590000
Lease Number: 2OG0005609
Surface Owner: FEE (PRIVATE)
Approval Date: 6/1/2010

Issued to:

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of R649-3-2. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis (copy attached).

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during

drilling of this well:

- Within 24 hours following the spudding of the well – contact Carol Daniels at 801-538-5284 (please leave a voicemail message if not available)
- OR
- submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at <https://oilgas.ogm.utah.gov>

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

Approved By:



Acting Associate Director, Oil & Gas

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

5. Lease Serial No. 20G0005609	
6. If Indian, Allottee or Tribe Name UTE	
7. If Unit or CA Agreement, Name and No. NA	
8. Lease Name and Well No. Ute Tribal 9-30-4-1E	
9. API Well No. 43-047-51059	
10. Field and Pool, or Exploratory Undesignated	
11. Sec., T. R. M. or Blk. and Survey or Area Sec. 30, T4S R1E	
12. County or Parish Uintah	13. State UT
14. Distance in miles and direction from nearest town or post office* Approximately 28.9 miles southeast of Myton, UT	
15. Distance from proposed* location to nearest property or lease line, ft. Approx. 470' f/lse, NA' f/unit (Also to nearest drig. unit line, if any)	16. No. of acres in lease NA
17. Spacing Unit dedicated to this well 40 Acres	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 1621'	19. Proposed Depth 6,795'
20. BLM/BIA Bond No. on file RLB0010462	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 4951' GL	22. Approximate date work will start* 3rd Qtr. 2010
23. Estimated duration (7) days from SPUD to rig release	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the BLM.

25. Signature <i>Mandie Crozier</i>	Name (Printed/Typed) Mandie Crozier	Date 4/20/10
--	--	-----------------

Title Regulatory Specialist		
Approved by (Signature) <i>James H. Sparger</i>	Name (Printed/Typed) James H. Sparger	Date JUN 16 2010
Title ACTING Assistant Field Manager Lands & Mineral Resources	Office VERNAL FIELD OFFICE	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)



NOTICE OF APPROVAL

DIV. OF OIL, GAS & MINING

RECEIVED
GREEN RIVER DISTRICT
JUN 23 2010
NOS 4/23/2010
AFMSS# 10550229A

CONDITIONS OF APPROVAL ATTACHED



**UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE**

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company:	Newfield Production Company	Location:	Lot 5, Sec.30 T4S R1E
Well No:	Ute Tribal 9-30-4-1E	Lease No:	2OG0005609
API No:	43-047-51059	Agreement:	N/A

OFFICE NUMBER: (435) 781-4400

OFFICE FAX NUMBER: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Construction Activity (Notify Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist)	- The Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist shall be notified at least 48 hours in advance of any construction activity. The Ute Tribal office is open Monday through Thursday.
Construction Completion (Notify Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist)	- Upon completion of the pertinent APD/ROW construction, notify the Ute Tribe Energy & Minerals Dept. for a Tribal Technician to verify the Affidavit of Completion. Notify the BLM Environmental Scientist prior to moving on the drilling rig.
Spud Notice (Notify BLM Petroleum Engineer)	- Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify BLM Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to running casing and cementing all casing strings to: ut_vn_opreport@blm.gov .
BOP & Related Equipment Tests (Notify BLM Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify BLM Petroleum Engineer)	- Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

Site Specific Conditions of Approval:

- No surface COAs

**DOWNHOLE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

SITE SPECIFIC DOWNHOLE COAs:

- Newfield Production Co. shall adhere to all referenced requirements in the SOP (version Ute Tribal Green River Development Program) along with all Oil and Gas rules and requirements listed in the code of Federal Regulations and all Federal Onshore Oil and Gas Orders..

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person

making the report (along with a telephone number) should the BLM need to obtain additional information.

- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or

data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

Spud
BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# Ross Rig #
21 Submitted By Don Bastian Phone Number 435-
823-6012

Well Name/Number Ute Tribal 9-30-4-1E
Qtr/Qtr NE/SE Section 30 Township 4S Range 1E
Lease Serial Number 2OG0005609
API Number 43-013-51059
47

Spud Notice – Spud is the initial spudding of the well, not drilling out below a casing string.

Date/Time 7/17/10 8:00 AM PM

Casing – Please report time casing run starts, not cementing times.

- Surface Casing
- Intermediate Casing
- Production Casing
- Liner
- Other

Date/Time 7/17/10 2:00 AM PM

BOPE

- Initial BOPE test at surface casing point
- BOPE test at intermediate casing point
- 30 day BOPE test
- Other

Date/Time _____ AM PM

Remarks Ross Rig #21 Will SpudThe Ute Tribal 9-30-4-1E @ 8:00 AM On 7/17/10. Run Casing @ 2:00 PM 7/17/10.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other Instructions on page 2

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
NEWFIELD PRODUCTION COMPANY

3a. Address Route 3 Box 3630
Myton, UT 84052

3b. Phone (include are code)
435 646 3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

0470 FSL0813 FEL
NESE Section 30 T4S R1E

5. Lease Serial No.
MON BUTTE EDA 20G0005609

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or

8. Well Name and No.
UTE TRIBAL 9-30-4-1E

9. API Well No.
4304751059

10. Field and Pool, or Exploratory Area
MYTON-TRIBAL EDA

11. County or Parish, State
UINTAH, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Spud Notice _____
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	_____

13. Describe Proposed or Completed Operation: (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recomplate in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 7/17/10 MIRU Ross # 21. Spud well @ 9:00 am. Drill 50' of 12 1/4" hole with air mist. TIH W/ 8 Jt's 8 5/8" J-55 24 # csgn. Set @ 350.67'KB. On 7/20/10 cement with 180 sks of class "G" w/ 3% CaCl2 + 1/4# sk Cello- Flake Mixed @ 15.8 ppg > 1.17 cf/ sk yeild. Returned 5 bbls cement to pit. WOC.

I hereby certify that the foregoing is true and correct (Printed/ Typed)

Jim Smith

Signature

Title

Drilling Foreman

Date

07/25/2010

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

(Instructions on page 2)

RECEIVED

AUG 10 2010

DIV. OF OIL, GAS & MINING

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
A	99999	17734	4301350289	UTE TRIBAL 15-14-4-3	SWSE	14	4	3W	DUCHESNE	7/21/2010	8/19/10
WELL 1 COMMENTS: <i>GRRV</i>											
CONFIDENTIAL											
B	99999	17400 ✓	4301333777	<i>FED</i> ASHLEY G-12-9-15	NWNW	12	9S	15E	DUCHESNE	7/17/2010	8/19/10
<i>GRRV</i> <i>BHL = NWNW</i>											
A	99999	17735	4304751059	UTE TRIBAL 9-30-4-1E	NESE	30	4S	1E	UINTAH	7/17/2010	8/19/10
<i>GRRV</i>											
A	99999	17736	4301350316	UTE TRIBAL 12-26-4-3	NWSW	26	4S	3W	DUCHESNE	7/19/2010	8/19/10
<i>GRRV</i>											
A	99999	17737	4301350366	UTE TRIBAL 13-26-4-3	SWSW	26	4S	3W	DUCHESNE	7/19/2010	8/19/10
WELL 5 COMMENTS: <i>GRRV</i>											
B	99999	17400 ✓	4301333878	<i>Fed</i> ASHLEY O-12-9-15	SENE	<i>11</i> 12	9S	15E	DUCHESNE	7/20/2010	8/19/10
WELL 5 COMMENTS: <i>GRRV</i> <i>BHL Sec 12 SWNW</i>											

ACTION CODES (See instructions on back of form)
 A - new entity for new well (single well only)
 B - well to existing entity (group or unit well)
 C - from one existing entity to another existing entity
 D - well from one existing entity to a new entity
 E - other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

RECEIVED
 AUG 10 2010

DIV. OF OIL, GAS & MINING

[Signature]
 Signature _____ Jentri Park
 Production Clerk
 Date 08/10/10

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

5. LEASE DESIGNATION AND SERIAL NUMBER:
MON BUTTE EDA 20G0005609

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

8. WELL NAME and NUMBER:
UTE TRIBAL 9-30-4-1E

9. API NUMBER:
4304751059

10. FIELD AND POOL, OR WILDCAT:
MYTON-TRIBAL EDA

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL: OIL WELL GAS WELL OTHER

2. NAME OF OPERATOR:
NEWFIELD PRODUCTION COMPANY

3. ADDRESS OF OPERATOR: Route 3 Box 3630 CITY Myton STATE UT ZIP 84052 PHONE NUMBER 435.646.3721

4. LOCATION OF WELL:
FOOTAGES AT SURFACE: COUNTY: UINTAH

OTR/OTR. SECTION. TOWNSHIP. RANGE. MERIDIAN: NESE, 30, T4S, R1E STATE: UT

CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARITLY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of Work Completion: 08/14/2010	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/STOP)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: - Weekly Status Report
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
The above subject well was completed on 08-14-10, attached is a daily completion status report.

NAME (PLEASE PRINT) Lucy Chavez-Naupoto TITLE Administrative Assistant

SIGNATURE *Lucy Chavez-Naupoto* DATE 08/16/2010

(This space for State use only)

RECEIVED

AUG 19 2010

DIV. OF OIL, GAS & MINING

Daily Activity Report

Format For Sundry

UTE TRIBAL 9-30-4-1E**6/1/2010 To 10/30/2010****8/6/2010 Day: 1****Completion**

Rigless on 8/6/2010 - Ran CBL & perforated 1st stage. SIWFN w/ 160 BWTR. - NU frac head & Cameron BOP's. RU Hot oiler & test casing, frac head, frac valves & BOP to 4500 psi. RU WLT w/ mast & pack off tool. Run CBL under pressure. WLTD was 6656' w/ TOC @ 140'. RIH w/ 3 1/8" ported guns & perforate Wasatch sds @ 6648- 56' w/ (11 gram, .36"EH, 16.82z pen. 120°) 3 spf for total of 24 shots. RD WLT & Hot Oiler. SIWFN w/ 160 BWTR.

Daily Cost: \$0**Cumulative Cost:** \$12,324**8/10/2010 Day: 2****Completion**

Rigless on 8/10/2010 - MIRU BJ Services & PSI WL. Frac stage #1. Perforate & frac stages 2 thru 6. Flowback well. SIWFN w/ 4088 BWTR. - MIRU BJ Services & PSI WL. Frac stage #1. Perforate & frac stages 2 thru 6. RD BJ Services & PSI WL. Flowback well @ 3 BPM rate. Flowed for 12 hrs & died. Rec 2095 BTF. SIWFN w/ 4088 BWTR.

Daily Cost: \$0**Cumulative Cost:** \$180,326**8/12/2010 Day: 3****Completion**

WWS #3 on 8/12/2010 - MIRU WWS #3. Set kill plug. Change out BOP & WH. RIH w/ 4 3/4" chomp bit. Drilled out 2 CBP. SIWFN w/ 3998 BWTR. - MIRU WWS #3. Unload tbg on racks. 600 psi on well. RU PSI WL. RIH w/ Weatherford 5 1/2" solid composite kill plug. Set plug @ 4640'. Bleed off pressure. RD WL. ND Cameron BOP & 5M WH. NU 3M WH & Schaffer BOP. Talley, PU & RIH w/ 4 3/4" chomp bit & 2 7/8" J-55 tbg. Tagged plug @ 4640'. RU Nabors power. Drill out plugs. Plug @ 4640' (Drilled out in 23 mins), Plug @ 4800' (Drilled out in 18 min). EOT @ 4828'. SIWFN w/ 3998 BWTR.

Daily Cost: \$0**Cumulative Cost:** \$233,400**8/13/2010 Day: 4****Completion**

WWS #3 on 8/13/2010 - Drilled out plugs. C/O to PBTD. Swab. SIWFN w/ 3718 BWTR. - 500 psi on well. Pumped 30 BW down tbg. Continue drilling out plugs. Plug @ 5360' (Drilled out in 19 mins), Plug @ 6000' (Drilled out in 13 mins), Plug @ 6280' (Drilled out in 14 mins), Plug @ 6535' (Drilled out in 23 mins). Tagged fill @ 6653'. C/O to PBTD @ 6712'. LD 2 jts of tbg. EOT 6654'. RU swab equipment. IFL @ surface. Made 14 swab runs. FFL @ 700'. Recovered 160 BTF. SIWFN w/ 3718 BWTR.

Daily Cost: \$0**Cumulative Cost:** \$238,608**8/14/2010 Day: 5****Completion**

WWS #3 on 8/14/2010 - C/O to PB. TOH w/ bit. TIH w/ production tbg. PU & RIH w/ "A" grade rod string. Hang head, space out rods. Pressure test to 800 psi. RDMOSU. POP @ 6:00

PM w/ 122" SL @ 5 SPM. 3628 BWTR. - 350 psi on tbg, 300 psi on csg. Pumped 30 BW down tbg. TIH w/ tbg to PB @ 6712'. Circulate well clean. LD extra tbg. TOH w/ tbg. LD bit & bit sub. PU & RIH w/ production tbg as follows: BP & collar, 3- jts, PBGA, SN, 2-jts, TA, 203 jts of 2 7/8" J-55 tbg. Well started to flow. Circulate well to kill. ND BOP. Set TA w/ 18,000#'s of tension. NU WH. PU & RIH w/ "A" grade rod string. Central hydraulic 2 1/2" X 1 1/2" X 24', 6- 1 1/2" wt bars, 20- 3/4" 4 per guided rods, 131- 3/4" plain rods, 100- 7/8" 4 per guided rods, 1- 2' x 7/8" pony rod. 1 1/2" X 30' polish rod. Hang head, space out rods. Pressure test to 800 psi. RDMOSU. POP @ 6:00 PM w/ 122" SL @ 5 SPM. 3628 BWTR. **Finalized**

Daily Cost: \$0

Cumulative Cost: \$283,904

Pertinent Files: Go to File List

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. Type of Well Oil Well Gas Well Dry Other
 b. Type of Completion: New Well Work Over Deepen Plug Back Diff. Resvr.,
 Other: _____

5. Lease Serial No.
EDA 20G0005609

2. Name of Operator
NEWFIELD EXPLORATION COMPANY

6. If Indian, Allottee or Tribe Name

3. Address
1401 17TH ST. SUITE 1000 DENVER, CO 80202

3a. Phone No. (include area code)
(435)646-3721

7. Unit or CA Agreement Name and No.

4. Location of Well (Report location clearly and in accordance with Federal requirements)*
At surface 470' FSL & 813' FEL (NE/SE) SEC. 30, T4S, R1E

8. Lease Name and Well No.
UTE TRIBAL 9-30-4-1E

At top prod. interval reported below

9. AFI Well No.
43-047-51059

At total depth 6767'

10. Field and Pool or Exploratory
MYTON-TRIBAL EDA

11. Sec., T., R., M., on Block and Survey or Area
SEC. 30, T4S, R1E

12. County or Parish
UINTAH

13. State
UT

14. Date Spudded
07/17/2010

15. Date T.D. Reached
07/29/2010

16. Date Completed 08/13/2010
 D & A Ready to Prod.

17. Elevations (DF, RKB, RT, GL)*
4951' GL 4963' KB

18. Total Depth: MD 6767'
TVD

19. Plug Back T.D.: MD 6712'
TVD

20. Depth Bridge Plug Set: MD
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
DUAL IND GRD, SP, COMP. DENSITY, COMP. NEUTRON, GR, CALIPER, CMT BOND

22. Was well cored? No Yes (Submit analysis)
Was DST run? No Yes (Submit report)
Directional Survey? No Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sks. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12-1/4"	8-5/8" J-55	24#	0	351'		180 CLASS G			
7-7/8"	5-1/2" J-55	15.5#	0	6757'		300 PRIMLITE		140'	
						450 50/50 POZ			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-7/8"	EOT@ 6543'	TA @ 6376'						

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Green River			6648-6656' Wasatch	.36"	3	24
B) Green River			6407-6481' BsCarb	.34"	3	51
C) Green River			6039-6204' CP1 CP2 CP4	.34"	3	33
D) Green River			5794-5941' LODC BIKShl	.34"	3	77

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

Depth Interval	Amount and Type of Material
6648-6656'	Frac w/ 39969#'s 20/40 sand in 269 bbls of Lightning 17 fluid.
6407-6481'	Frac w/ 84785#'s 30/50 sand in 1944 bbls of slick water.
6039-6204'	Frac w/ 45240#'s 20/40 sand in 312 bbls of Lightning 17 fluid.
5794-5941'	Frac w/ 88355# 30/50 sand in 1972 bbls slick water.

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
8-14-10	8-26-10	24	→	98	41	42			2-1/2" x 1-1/2" x 21' x 24' RHAC Pump
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	PRODUCING
			→						

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

RECEIVED
SEP 20 2010

DIV. OF OIL, GAS & MINING

*(See instructions and spaces for additional data on page 2)

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

29. Disposition of Gas (Solid, used for fuel, vented, etc.)

SOLD & USED FOR FUEL

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

GEOLOGICAL MARKERS

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
				GARDEN GULCH MRK GARDEN GULCH 1	4206' 4380'
				GARDEN GULCH 2 POINT 3	4502' 4795'
				X MRKR Y MRKR	5003' 5038'
				DOUGALS CREEK MRK BI CARBONATE MRK	5175' 5467'
				B LIMESTON MRK CASTLE PEAK	5647' 5979'
				BASAL CARBONATE WASATCH	6370' 6495'

32. Additional remarks (include plugging procedure):

Stage 5: Green River Formation (DS1 & D2) 5064-5278', .34" 3/15 Frac w/ 21339#'s of 20/40 sand in 166 bbls of Lightning 17 fluid

Stage 6: Green River Formation (GB4) 4707-4711', .34" 3/12 Frac w/ 33593#'s of 20/40 sand in 245 bbls of Lightning 17 fluid


33. Indicate which items have been attached by placing a check in the appropriate boxes:

- Electrical/Mechanical Logs (1 full set req'd.)
 Geologic Report
 DST Report
 Directional Survey
 Sundry Notice for plugging and cement verification
 Core Analysis
 Other: Drilling Daily Activity

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) Lucy Chavez-Naupoto

Title Administrative Assistant

Signature 

Date 09/14/2010

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Daily Activity Report

Format For Sundry

UTE TRIBAL 9-30-4-1E

5/1/2010 To 9/30/2010

UTE TRIBAL 9-30-4-1E

Waiting on Cement

Date: 7/20/2010

Ross #21 at 350. Days Since Spud - @ 15.8ppg and 1.17 yield , returned 5 bbls cement to pit, left 100 psi on csg - Noify BLM, State and Ute tribe of spud, .csg and cmt - On 7/17/10 Spud @ 9:00 am Spud, Drill 12 1/4" hole to 350'. P/U 8 jts 8 5/8" csg set @ 350.67 KB - On 7/20/10 CMT w/BJ 180 sks of class G cmt + 2% calcium chloride+ .25 # sk cello flake mixed

Daily Cost: \$0

Cumulative Cost: \$48,883

UTE TRIBAL 9-30-4-1E

Waiting on Cement

Date: 7/24/2010

NDSI #1 at 350. 0 Days Since Spud - tear down

Daily Cost: \$0

Cumulative Cost: \$63,027

UTE TRIBAL 9-30-4-1E

Drill 7 7/8" hole with fresh water

Date: 7/25/2010

NDSI #1 at 1359. 1 Days Since Spud - Surface csg @ 1500 PSI - test good - R/U B&C quickestest Test Kelly,safty valve,choke manifold,Pipe and blind rams @ 2000 PSI - Pick up Hughs 7 7/8" DP506F PDC, Hunting .33 1.5° M.M. ,Extreme 1x30' Monel 1x2' hang off sub - 21 6" DC. Tag @ 310' - Drill 7 7/8" hole F/310' - 732', w/ 15 WOB, 165 RPM, 351 GPM,ROP 98 - Install rotating rubber - Drill 7 7/8" hole F/732' - 1359, w/ 15 WOB, 165 RPM, 351 GPM,ROP 95 - MIRU W/Jones Trucking 4 miles set up all equipment

Daily Cost: \$0

Cumulative Cost: \$80,320

UTE TRIBAL 9-30-4-1E

Drill 7 7/8" hole with fresh water

Date: 7/26/2010

NDSI #1 at 3519. 2 Days Since Spud - Drill 7 7/8" hole F/ 2425' to 3519' w/ 15 WOB, 165 RPM, 351 GPM,ROP 91 - Rig Service, Function test BOP and Crown-O-Matic. Grease Blocks, Swivel and Kelly Spinners - Drill 7 7/8" hole F/ 1359' to 2425' w/ 15 WOB, 165 RPM, 351 GPM,ROP 91

Daily Cost: \$0

Cumulative Cost: \$105,657

UTE TRIBAL 9-30-4-1E

Drill 7 7/8" hole with fresh water

Date: 7/27/2010

NDSI #1 at 5148. 3 Days Since Spud - Circulate Wait on Brine - Trip out of hole. Pickup Bit # 2 and Trip in hole - Drill 7 7/8" hole F/ 3739' to 5148' W/ 15,000 WOB, 165 RPM, 351 GPM,ROP 117fph - Drill 7 7/8" hole F/ 3519' to 3739' W/ 15,000 WOB, 165 RPM, 351 GPM,ROP 91fph

Daily Cost: \$0

Cumulative Cost: \$129,220

UTE TRIBAL 9-30-4-1E

Drill 7 7/8" hole with fresh water

Date: 7/28/2010

NDSI #1 at 6527. 4 Days Since Spud - Drill 7 7/8" hole F/ 5649' to 6527' W/ 15,000 WOB, 121 RPM, 351 GPM,ROP 117fph - Rig service, Function test BOP and Crown-O-Matic Grease Blocks, Swivel and Crown - Drill 7 7/8" hole F/ 5148' to 5649' W/ 15,000 WOB, 121 RPM, 351 GPM,ROP 117fph - Work on Stand Pipe, Change chain in Drawworks

Daily Cost: \$0**Cumulative Cost:** \$143,783

UTE TRIBAL 9-30-4-1E**Wait on Completion****Date:** 7/29/2010

NDSI #1 at 6767. 5 Days Since Spud - Rig Up casing Crew and run 159jts 5 1/2" J-55 LT&C casing Set @ 6757.35KB - Rig up BJ hardlines and Circulate W/ Rig pump. - Pump 300 sks PL11+3%KCL+5#CSE+0.5#CF+5#KOL+5SMS+FP+SF mixed @11ppg W/3.53yield - Pump 450sks 50:50:2+3%KCL+0.5%EC-1+.25#CF+.05#SF+.3SMS+FP-6L Mixed @ 14.4ppg - W/ 1.24yield returned 17bbls returned to pit. - Nipple down set slips W/ 106,000 tension - Clean mud tanks - Clean Mud Tanks - Release Rig @ 9:30 AM 7/29/10 - Rig up B&C Quick Test and test 5 1/2" Casing Rams to 2,000PSI - Rig up PSI and Log Well. (Loggers TD 6755 - Laydown Drill Pipe and BHA - Spot 360bbls Brine - Laydown Drill pipe to 4,000' - Pump high Vis sweep circulate F/ logs - Drill 7 7/8" hole F/ 6527' to 6760 W/ 15,000 WOB, 121 RPM, 351 GPM,ROP 117fph - Work on stand pipe - Release Rig @ 9:30 AM 7/29/10 - Clean Mud Tanks - Clean mud tanks - Nipple down set slips W/ 106,000 tension - W/ 1.24yield returned 17bbls returned to pit. - Pump 450sks 50:50:2+3%KCL+0.5%EC-1+.25#CF+.05#SF+.3SMS+FP-6L Mixed @ 14.4ppg - Pump 300 sks PL11+3%KCL+5#CSE+0.5#CF+5#KOL+5SMS+FP+SF mixed @11ppg W/3.53yield - Rig up BJ hardlines and Circulate W/ Rig pump. - Rig Up casing Crew and run 159jts 5 1/2" J-55 LT&C casing Set @ 6757.35KB - Rig up B&C Quick Test and test 5 1/2" Casing Rams to 2,000PSI - Rig up PSI and Log Well. (Loggers TD 6755 - Laydown Drill Pipe and BHA - Spot 360bbls Brine - Laydown Drill pipe to 4,000' - Pump high Vis sweep circulate F/ logs - Work on stand pipe - Drill 7 7/8" hole F/ 6527' to 6760 W/ 15,000 WOB, 121 RPM, 351 GPM,ROP 117fph **Finalized**

Daily Cost: \$0**Cumulative Cost:** \$278,420

Pertinent Files: Go to File List

ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION				COUNTY	SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG			
E	17755	17755	4304751049	UTE TRIBAL 1-15-4-1E	NENE	15	4S	1E	UINTAH	7/23/2010	9/2/10
WELL 1 COMMENTS: CHANGE FORMATION F/ GRRV TO GRWS											
CONFIDENTIAL											
E	17735	17735	4304751059	UTE TRIBAL 9-30-4-1E	NESE	30	4S	1E	UINTAH	7/17/2010	8/13/10
CHANGE FORMATION F/ GRRV TO GRWS											
E	17796	17796	4304751111	HANCOCK 2-23-4-1	NWNE	23	4S	1E	UINTAH	9/15/2010	10/13/10
CHANGE FORMATION F/ GRRV TO GRWS											
E	17804	17804	4304751162	SCHWAB-STOLLMACK 3-19-4-1E	NENW	19	4S	1E	UINTAH	10/3/2010	11/19/10
CHANGE FORMATION F/ GRRV TO GRWS											
E	17802	17802	4304751165	SCHWAB-STOLLMACK 6-19-4-1E	SENE	19	4S	1E	UINTAH	9/25/2010	10/30/10
CHANGE FORMATION F/ GRRV TO GRWS											

ACTION CODES (See Instructions on back of form)
 A - 1 new entity for new well (single well only)
 B - 1 well to existing entity (group or unit well)
 C - from one existing entity to another existing entity
 D - well from one existing entity to a new entity
 E - other (explain in comments section)

RECEIVED
DEC 21 2010

Signature _____ Jentri Park
 Production Clerk _____ 12/21/10

NOTE: Use COMMENT section to explain why each Action Code was selected.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	5. LEASE DESIGNATION AND SERIAL NUMBER: 20G0005609
1. TYPE OF WELL Oil Well	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY	7. UNIT or CA AGREEMENT NAME:
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052	8. WELL NAME and NUMBER: UTE TRIBAL 9-30-4-1E
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0470 FSL 0813 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESE Section: 30 Township: 04.0S Range: 01.0E Meridian: U	9. API NUMBER: 43047510590000
9. FIELD and POOL or WILDCAT: WINDY RIDGE	COUNTY: UINTAH
9. API NUMBER: 43047510590000	STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 2/4/2015	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input checked="" type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The Ute Tribal 9-30-4-1E will be Temporarily Abandoned due to a hole in tubing. The work required to fix the well is not able to pass new economic hurdle rates.

Accepted by the
Utah Division of
Oil, Gas and Mining
FOR RECORD ONLY
 February 13, 2015

NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A	DATE 2/5/2015	