

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS AND MINING				FORM 3 AMENDED REPORT <input checked="" type="checkbox"/>		
APPLICATION FOR PERMIT TO DRILL				1. WELL NAME and NUMBER HOSS 22-32		
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>				3. FIELD OR WILDCAT NATURAL BUTTES		
4. TYPE OF WELL Gas Well Coalbed Methane Well: NO				5. UNIT or COMMUNITIZATION AGREEMENT NAME		
6. NAME OF OPERATOR EOG Resources, Inc.				7. OPERATOR PHONE 435 781-9111		
8. ADDRESS OF OPERATOR 1060 East Highway 40, Vernal, UT, 84078				9. OPERATOR E-MAIL kaylene_gardner@eogresources.com		
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) UTU56965		11. MINERAL OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>		12. SURFACE OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>		
13. NAME OF SURFACE OWNER (if box 12 = 'fee')				14. SURFACE OWNER PHONE (if box 12 = 'fee')		
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')				16. SURFACE OWNER E-MAIL (if box 12 = 'fee')		
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')		18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input checked="" type="checkbox"/> (Submit Commingling Application) NO <input type="checkbox"/>		19. SLANT VERTICAL <input checked="" type="checkbox"/> DIRECTIONAL <input type="checkbox"/> HORIZONTAL <input type="checkbox"/>		
20. LOCATION OF WELL	FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN
LOCATION AT SURFACE	1671 FSL 1998 FEL	NWSE	32	8.0 S	23.0 E	S
Top of Uppermost Producing Zone	1671 FSL 1998 FEL	NWSE	32	8.0 S	23.0 E	S
At Total Depth	1671 FSL 1998 FEL	NWSE	32	8.0 S	23.0 E	S
21. COUNTY UINTAH		22. DISTANCE TO NEAREST LEASE LINE (Feet) 1730		23. NUMBER OF ACRES IN DRILLING UNIT 640		
		25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 2980		26. PROPOSED DEPTH MD: 9730 TVD: 9730		
27. ELEVATION - GROUND LEVEL 4944		28. BOND NUMBER NM2308		29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 49-225		
ATTACHMENTS						
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES						
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER			<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN			
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)			<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER			
<input type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)			<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP			
NAME Nanette Lupcho		TITLE Regulatory Assistant		PHONE 435 781-9157		
SIGNATURE		DATE 07/19/2010		EMAIL Nanette_Lupcho@EOGResources.com		
API NUMBER ASSIGNED 43047511690000		 Permit Manager				

Proposed Hole, Casing, and Cement						
String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Prod	7.875	4.5	0	9730		
Pipe	Grade	Length	Weight			
	Grade N-80 LT&C	9730	11.6			

Proposed Hole, Casing, and Cement						
String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Surf	12.25	9.625	0	2700		
Pipe	Grade	Length	Weight			
	Grade J-55 ST&C	2700	36.0			

T8S, R23E, S.L.B.&M.

EOG RESOURCES, INC.



Well location, HOSS #22-32, located as shown in the NW 1/4 SE 1/4 of Section 32, T8S, R23E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

BENCH MARK 20EAM LOCATED IN THE SE 1/4 OF SECTION 35, T8S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4697 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

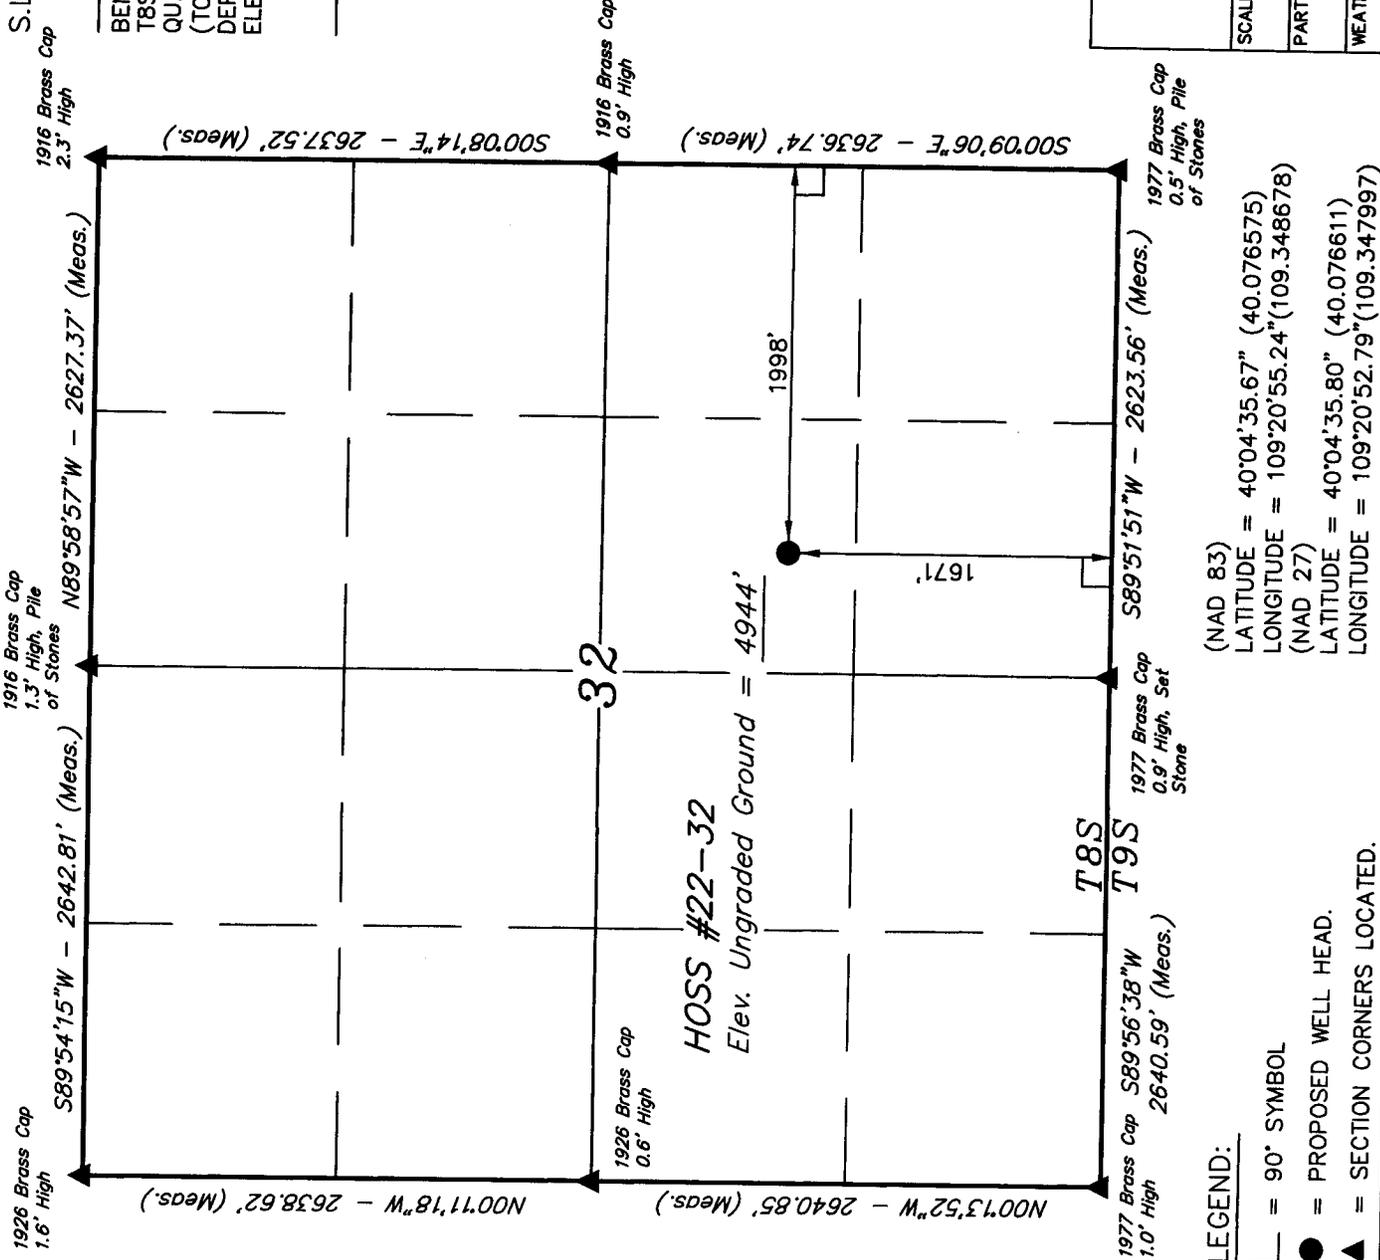

THIS IS TO CERTIFY THAT THE ABOVE WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYING BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

UINTAH ENGINEERING & LAND SURVEYING	
85 SOUTH 200 EAST - VERNAL, UTAH 84078	
(435) 789-1017	
SCALE	DATE SURVEYED: 08-01-06
1" = 1000'	DATE DRAWN: 08-03-06
PARTY	REFERENCES
B.H. F.Y. C.H.	G.L.O. PLAT
WEATHER	FILE
WARM	EOG RESOURCES, INC.

(NAD 83)
 LATITUDE = 40°04'35.67" (40.076575)
 LONGITUDE = 109°20'55.24" (109.348678)
 (NAD 27)
 LATITUDE = 40°04'35.80" (40.076611)
 LONGITUDE = 109°20'52.79" (109.347997)

- LEGEND:
- = 90° SYMBOL
 - = PROPOSED WELL HEAD.
 - ▲ = SECTION CORNERS LOCATED.

DRILLING PLAN

HOSS 22-32

**NW/SE, SEC. 32, T8S, R23E, S.L.B.&M.,
UINTAH COUNTY, UTAH**

1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:

FORMATION	TVD-RKB (ft)	Objective	Lithology	
Green River	2,138		Shale	
Birdsnest	2,237		Dolomite	
Mahogany Oil Shale Bed	2,768		Shale	
Wasatch	5,000	Primary	Sandstone	Gas
Chapita Wells	5,664	Primary	Sandstone	Gas
Buck Canyon	6,356	Primary	Sandstone	Gas
North Horn	6,977	Primary	Sandstone	Gas
KMV Price River	7,515	Primary	Sandstone	Gas
KMV Price River Middle	8,325	Primary	Sandstone	Gas
KMV Price River Lower	9,161	Primary	Sandstone	Gas
Sego	9,490		Sandstone	
TD	9,730			

Estimated TD: 9,730' or 200'± below TD

Anticipated BHP: 5,313 Psig

1. Fresh Waters may exist in the upper, approximately 1,000 ft ± of the Green River Formation, with top at about 1,400 ft ±.
2. Cement isolation is installed to surface of the well isolating all zones by cement.

EOG Resources, Inc. requests authorization for commingling of production from the Wasatch and Mesaverde formations in the referenced wellbore. In the event allocation of production is necessary, the allocation will be based on proportionate net pay as calculated from cased-hole logs. Production from the Wasatch and Mesaverde formations will be commingled in the wellbore and produced through open-ended 2-3/8" tubing landed below all perforations in the 4-1/2" production casing.

Attached is a map showing the location of all wells on contiguous oil and gas leases or drilling units and an affidavit showing that this application has been provided to owners of all contiguous oil and gas leases or drilling units overlying the pool.

3. PRESSURE CONTROL EQUIPMENT:

Production Hole – 5000 Psig
BOP schematic diagrams attached.

4. CASING PROGRAM:

CASING	Hole Size	Length	Size	WEIGHT	Grade	Thread	Rating Collapse	Factor Burst	Tensile
Conductor	20"	0 – 60'	14"	48.0#	H-40	STC	770 PSI	1730 PSI	322,000#
Surface	12 1/4"	0 – 2700' KB±	9-5/8"	36.0#	J-55	STC	2020 PSI	3520 Psi	394,000#
Production	7-7/8"	Surface – TD	4-1/2"	11.6#	N-80	LTC	6350 PSI	7780 Psi	233,000#

DRILLING PLAN

HOSS 22-32

NW/SE, SEC. 32, T8S, R23E, S.L.B.&M..
UINTAH COUNTY, UTAH

Note: 12-1/4" surface hole will be drilled to a total depth of 200'± below the base of the Green River lost circulation zone and cased w/9-5/8" as shown to that depth. Drilled depth may be shallower or deeper than the 2700' shown above depending on the actual depth of the loss zone.

All casing will be new or inspected.

5. Float Equipment:

Surface Hole Procedure (0'- 2700'±)

Guide Shoe
Insert Float Collar (PDC drillable)
Centralizers: 1-5' above shoe, top of jts. #2 and #3 then every 5th joint to surface. (15 total)

Production Hole Procedure (2700'± - TD):

Float shoe, 1 joint casing, float collar and balance of casing to surface. 4-1/2", 11.6#, N-80 or equivalent marker collars or short casing joints to be placed at top of Price River and 400' above top of Wasatch. Centralizers to be placed 5' above shoe on joint #1, top of joint #2, and every 3rd joint to 400' above the top of primary objective. Thread lock float shoe, top and bottom of float collar, and top of 2nd joint.

6. MUD PROGRAM

Surface Hole Procedure (Surface - 2700'±):

Air/air mist or aerated water.

Production Hole Procedure (2700'± - TD):

Anticipated mud weight 9.5 – 10.5 ppg depending on actual wellbore conditions encountered while drilling.

2700'± - TD A closed mud system will be utilized. A bentonite gelled water mud system will be used to control viscosity w/PHPA polymer used for supplemental viscosity and clay encapsulation/inhibition. Water loss will be maintained at <15cc's using white starch or PAC. Bactericides will be used as needed. Anticipated pH will range from 9.0-10.0. Mud weight will be adjusted as necessary for well control. Deflocculants/thinners will be used as necessary to maintain mud quality. LCM sweeps will be utilized as necessary to control lost circulation and mud loss. CO2 contamination, if encountered, will be treated with lime and gypsum.

DRILLING PLAN

HOSS 22-32

**NW/SE, SEC. 32, T8S, R23E, S.L.B.&M.,
UINTAH COUNTY, UTAH**

7. VARIANCE REQUESTS:

**Reference: Onshore Oil and Gas Order No. 1
Onshore Oil and Gas Order No. 2 – Section E: Special Drilling Operations**

- EOG Resources, Inc. requests a variance to regulations requiring a straight run blooie line to be 100' in length. (Where possible, a straight run blooie line will be used).
- EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. To reduce location excavation, the blooie line will be approximately 75' in length.
- EOG Resources, Inc. requests a variance to regulations, during air drilling operations only, requiring dedusting equipment. Dust during air drilling operations is controlled by water mist.
- EOG Resources, Inc. requests a variance to regulations, during air drilling operations only, requiring an automatic igniter or continuous pilot light on the blooie line. (Not required on aerated water system).
- EOG Resources, Inc. requests a variance that compressors are located in the opposite direction from the blooie line a minimum of 100 feet from the well bore. (Air Compressors are rig mounted).

8. EVALUATION PROGRAM:

Logs: Mud log from base of surface casing to TD.
Cased-hole Logs: Cased-hole logs will be run in lieu of open-hole logs consisting of the following:
Cement Bond / Casing Collar Locator and Pulsed Neutron

9. CEMENT PROGRAM:

Surface Hole Procedure (Surface - 2700'±):

Lead: 471 sks Class "G" cement with 16% Gel, 10 #/sx Gilsonite, 3% Salt, 2% CaCl₂, 3 lb/sx GR3 ¼ #/sx Flocele mixed at 11 ppg, 3.82 ft³/sk. yield, 23 gps water.

Tail: 347 sks Class "G" cement with 2% CaCl₂, ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft³/sk., 5.2 gps water.

Top Out: As necessary with Class "G" cement with 2% CaCl₂, ¼#/sk Flocele mixed at 15.6 ppg, 1.18 ft³/sk., 5.2 gps water.

Note: Cement volumes will be calculated to bring lead cement to surface and tail cement to 500' above the casing shoe.
The above volumes are based on gauge hole with no excess.

DRILLING PLAN

HOSS 22-32

**NW/SE, SEC. 32, T8S, R23E, S.L.B.&M.,
UINTAH COUNTY, UTAH**

Production Hole Procedure (2700'± - TD)

Lead: **116 sks:** Hi-Lift "G" w/12% D20 (Bentonite), 1% D79 (Extender), 5% D44 (Salt), 0.2% D46 (Antifoam), 0.25% D112 (Fluid Loss Additive), 0.25 pps D29 (cello flakes) mixed at 11.0 ppg, 3.91 ft³/sk., 24.5 gps water.

Tail: **913 sks:** 50:50 Poz "G" w/ 2% D20 (Bentonite), 0.1% D46 (Antifoam), 0.075% D13 (Retarder), 0.2% D167 (Fluid Loss Additive), 0.2% D65 (Dispersant), mixed at 14.1 ppg, 1.28 ft³/sk., 5.9gps water.

Note: The above number of sacks is based on gauge-hole calculation.
Lead volume to be calculated to bring cement to 200'± above 9-5/8" casing shoe.
Tail volume to be calculated to bring cement to 400'± above top of Wasatch.

Final Cement volumes will be based upon gauge-hole plus 45% excess.

10. ABNORMAL CONDITIONS:

Surface Hole (Surface - 2700'±):

Lost circulation

Production Hole (2700'± - TD):

Sloughing shales, lost circulation and key seat development are possible in the Wasatch Formation.

11. STANDARD REQUIRED EQUIPMENT:

- A. Choke Manifold
- B. Upper and Lower Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

12. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

DRILLING PLAN

HOSS 22-32


**NW/SE, SEC. 32, T8S, R23E, S.L.B.&M.,
UINTAH COUNTY, UTAH**

13. Air Drilling Operations:


1. Main Air Compressors are 1250 CFM 350 psi with 2000 psi Boosters and are rig mounted.
2. Secondary Air Compressors are 1170 CFM 350 psi with 2000 psi Boosters and are rig mounted.
3. Minimum setting depth of conductor casing will be 60' GL or 10'± into competent formation, whichever is deeper, as determined by the EOG person in charge. Exceptions must be approved by an EOG drilling superintendent or manager.
4. The diameter of the diverter flow line will be a minimum of 10" to help reduce back pressure on the well bore during uncontrolled flow.
5. Rat and Mouse hole drilling will occur only after surface casing has been set and cemented.
6. EOG Resources, Inc. will use a properly maintained and lubricated stripper head.

(Attachment: BOP Schematic Diagram)

EOG RESOURCES 11" 5,000 PSI W.P. BOP CONFIGURATION

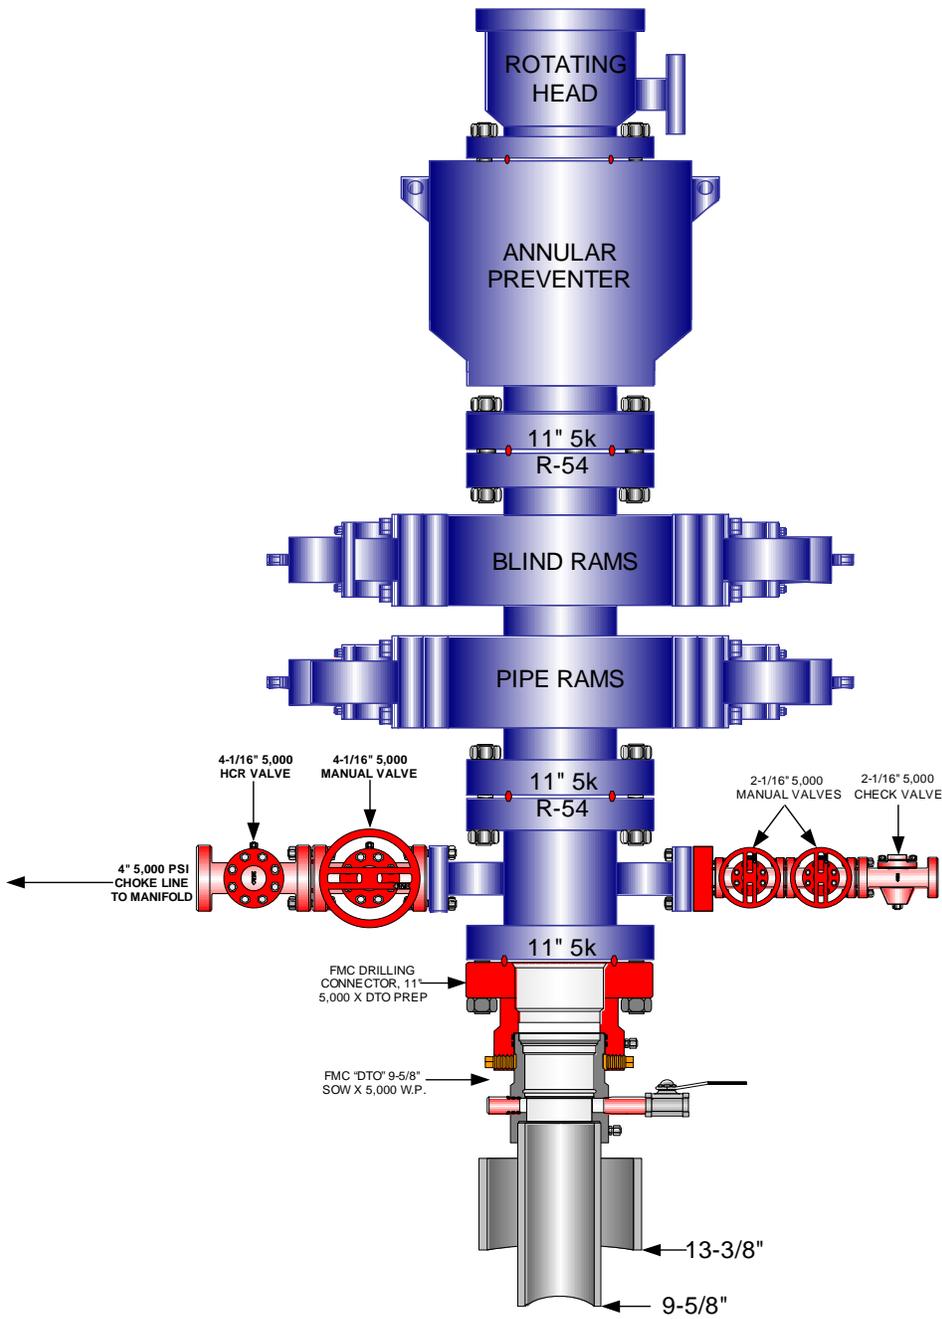

**EOG RESOURCES CHOKE MANIFOLD CONFIGURATION
W/ 5,000 PSI WP VALVES**

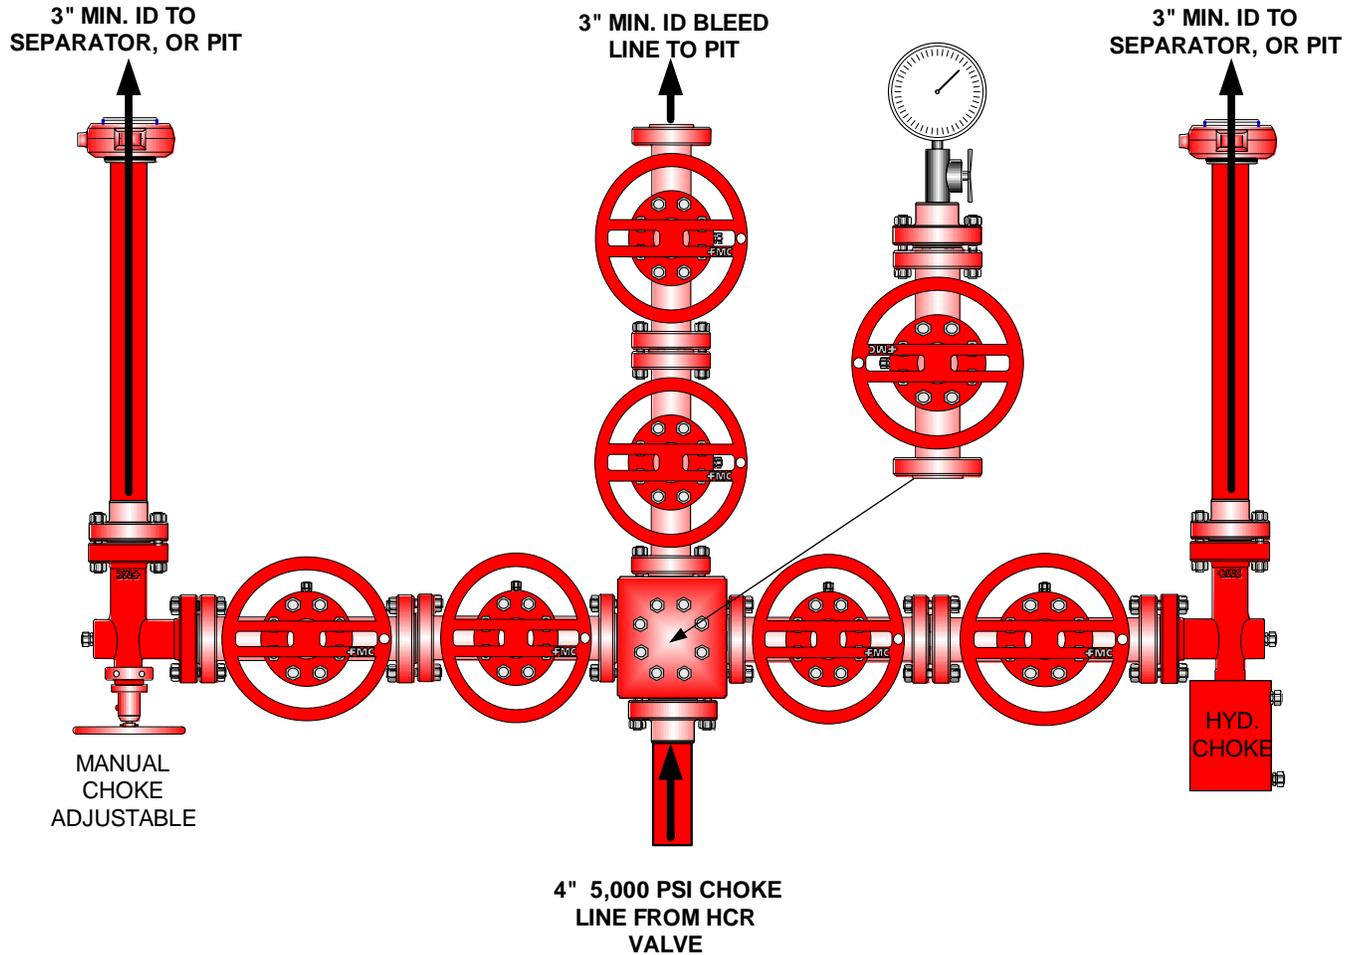

Testing Procedure:

1. BOP will be tested with a professional tester to conform to Onshore Order #2.
2. Blind and Pipe rams will be tested to rated working pressure, 5,000 psi.
3. Annular Preventer will be tested to 50% working pressure, 2,500 psi.
Casing will be tested to 0.22 psi / ft. or 1,500 psi. Not to exceed 70% of burst strength, **whichever is greater.**
4. All lines subject to well pressure will be tested to the same pressure as blind and pipe rams.
5. All BOPE specifications and configurations will meet Onshore Order #2 requirements.



**HOSS 22-32
NWSE, Section 32, T8S, R23E
Uintah County, Utah**

SURFACE USE PLAN

The well pad is approximately 325 feet long with a 246-foot width, containing 1.84 acres more or less. The well access road is approximately 2112 feet long with a 30-foot right-of-way, disturbing approximately 1.45 acres. New surface disturbance associated with access road and the well pad is estimated to be approximately 3.29 acres. The pipeline is approximately 2710 feet long with a 40-foot right-of-way, within Federal Lease UTU-56965 disturbing approximately 2.49 acres.

1. EXISTING ROADS:

- A. See attached Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 37.7 miles south of Vernal, Utah – See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary.

2. PLANNED ACCESS ROAD:

- A. The access road will be approximately 2112' in length; (1) 18" X 40' CMP and (1) water crossing will be installed. See attached Topo B.
- B. The access road has a 30-foot ROW w/18 foot running surface.
- C. Maximum grade of the new access road will be 8 percent.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.

- H. No gates, cattleguards, or fences will be required or encountered.
- I. A 30-foot permanent right-of-way is requested. No surfacing material will used.
- J. No additional storage areas will be needed for storing equipment, stockpiling, or vehicle parking.

All travel will be confined to existing access road rights-of-way.

New or reconstructed roads will be centerlined – flagged at time of location staking. Access roads and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development, Fourth Edition and/or BLM Manual Section 9113 concerning road construction standards on projects subject to federal jurisdiction.

The road shall be constructed/upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Construction/upgrading shall include ditching, draining, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed, safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 40-foot right-of-way will not be allowed. Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing nor shall the roadbed block the drainages. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, EOG Resources, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

Traveling off the 30-foot right-of-way will not be allowed. The access road and associated drainage structures will be constructed and maintained in accordance with road guidelines contained in the joint BLM/USFS publication: Surface Operating Standards for Oil and Gas Exploration and Development, Fourth Edition, and/or BLM Manual Section 9113 concerning road construction standards on projects subject to federal jurisdiction. During the drilling and production phase of operations, the road surface and shoulders will be kept in a safe and useable condition and drainage ditches and culverts will be kept clear and free flowing.

An off- lease ROW is not required. The entire length of the proposed access road is located within federal lease UTU 56965.

3. LOCATION OF EXISTING WELLS WITHIN A ONE-MILE RADIUS:

See attached TOPO map “C” for the location of wells within a one-mile radius.

4. LOCATION OF EXISTING AND/OR PROPOSED PRODUCTION FACILITIES:**A. On Well Pad**

1. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of wellhead valves, combo separator-dehy unit with meter, two (2) 400-bbl vertical tanks and attaching piping.
2. Gas gathering lines – A 4” gathering line will be buried from dehy to the edge of the location.

B. Off Well Pad

1. Proposed pipeline will transport natural gas.
2. The pipeline will be a permanent feeder line.
3. The length of the proposed pipeline is 2710 x 40’. The proposed pipeline leaves the eastern edge of the well pad (Lease UTU 56065) proceeding in a westerly direction for an approximate distance of 2710’ tying into an existing pipeline in the SESW of Section 32, T8S, R23E (Lease UTU 56065), authorized under existing pipeline right-of-way UTU-08765. Pipe will be 4” NOM, 0.156 wall, Grade X42, Zap-Lock, electric weld with a 35 mil X-Tru coating.
4. Proposed pipeline will be a 4” OD steel, zap-lok line laid on the surface
5. Proposed pipeline will be laid on surface.
6. An off-lease ROW is not required. The entire length of the proposed pipeline is located within federal lease UTU 56965.
7. The proposed pipeline route begins in the NWSE of Section 32, Township 8S, Range 23E, proceeding westerly for an approximate distance of 2710’ to the SESW of Section 32, Township 8S, Range 23E.
8. Pipeline will be coupled using the Zap lock method. No additional off-pad facilities will be required.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within 6 months of installation. **All facilities will be painted with Carlsbad Canyon.** Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

5. LOCATION AND TYPE OF WATER SUPPLY:

- A. Water supply will be Bonanza Power Plant water source in Sec 26, T8S, R23E, Uintah County, UT (State Water Right # 49-225(A31368)).
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. SOURCE OF CONSTRUCTION MATERIALS:

- A. All construction material for this pipeline will be of native borrow and soil accumulated during the construction of the location.
- B. No mineral materials will be required.

7. METHODS OF HANDLING WASTE DISPOSAL:

A. METHODS AND LOCATION

- 1. Cuttings will be confined and dried in a cuttings pit. Dried cuttings shall be spread on the location and authorized access road.
 - 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
 - 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah County Landfill.
 - 4. Produced wastewater will be confined to a storage tank for a period not to exceed 90 days after initial production. After the 90 day period, the produced water will be contained in a tank on location and then disposed of at one of the following locations: Natural Buttes Unit 21-20B SWD, Ace Disposal, CWU 550-30N SWD CWU 2-29 SWD, Red Wash Evaporation Ponds 1, 2, 3, 4, 5, 6, or 7, or Coyote Evaporation Ponds 1, 2, 3, or 4, or Hoss SWD Facility, right-of-way UTU 86010, UTU 897093 or EOG Resources, Inc. drilling operations (Chapita Wells Unit, Natural Buttes Unit & Stagecoach Unit).
 - 5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.
- B. Water from drilling fluids and recovered during testing operations will be disposed of by either natural or artificial evaporation methods, or by removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to the closed loop system will be avoided by flaring them off in the flare pit at the time of recovery.

The referenced well will be drilling utilizing a closed loop system. The closed loop system will be installed in a manner that preventing leaks, breaks, or discharge. Drill

cutting will be contained in an area approximately 50' x 100' more or less. The surface drill cuttings pile will be bermed and lined with bentonite. Drill cuttings will be dried and spread on location. More stringent protective requirements may be deemed necessary by the authorized officer.

EOG Resources, Inc. maintains a file, per 29 CFR 1910.1200 (g) containing current Material Safety Data Sheets (MSDS) for all chemicals, compounds, and/or substances which are used during the course of construction, drilling, completion, and production operations for this project. Hazardous materials (substances) which may be found at the site may include drilling mud and cementing products which are primarily inhalation hazards, fuels (flammable and/or combustible), materials that may be necessary for well completion/ stimulation activities such as flammable or combustible substances and acids/gels (corrosives). The opportunity for Superfund Amendments and Reauthorization Act (SARA) listed Extremely Hazardous Substances (EHS) at the site is generally limited to proprietary treating chemicals. All hazardous and EHS and commercial preparations will be handled in an appropriate manner to minimize the potential for leaks or spills to the environment.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completion of the well. Furthermore, extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will not be used, produced, stored, transported, or disposed of in association with the drilling, testing or completion of the well.

8. ANCILLARY FACILITIES:

None anticipated.

9. WELL SITE LAYOUT:

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The proposed location will be drilled utilizing a closed loop system.

The stockpiled location topsoil will be stored in a location providing easy access for interim reclamation and protection of the topsoil. Upon completion of construction, the stockpiled topsoil from the location will be broadcast seeded with the approved seed mixture from this location and then walked down with a Caterpillar tractor.

Access to the well pad will be from the west.

10. PLANS FOR RECLAMATION OF THE SURFACE:

A. Interim Reclamation (Producing Location)

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The portion of the location not needed for production facilities/operations will be reclaimed – See attached Figure #3. The reserve pit will be reclaimed within 90 days from the date of the well completion, or as soon as environmental conditions allow. Before any dirt takes place, the reserve pit must be completely dry and free of all foreign obstacles.

The stockpiled pit topsoil will then be spread over the pit area and broadcast seeded with the prescribed seed mixture for this location as authorized within EOG's reclamation plan filed September 29, 2009.

B. Dry Hole/Abandoned Location

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BLM will attach the appropriate surface rehabilitation conditions of approval.

11. SURFACE OWNERSHIP:

Surface ownership of the proposed well site, access road, and pipeline route is as follows:

Bureau of Land Management

12. OTHER INFORMATION:

- A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the Authorized Officer. Within five working days the Authorized Officer will inform the operator as to:

- Whether the materials appear eligible for the National Register of Historic Places;
- The mitigation measures the operator will likely have to undertake before the site can be used.
- A time frame for the Authorized Officer to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the Authorized Officer are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the Authorized Officer will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The Authorized Officer will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the Authorized Officer that required mitigation has been completed, the operator will then be allowed to resume construction.

- B. As operator, EOG Resources, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BLM administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.
- C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on BLM lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)
- D. The drilling rig and ancillary equipment will be removed from the location prior to commencement of completion operations. Completion operations will be conducted utilizing a completion/workover rig.

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice of Lessees. The operator is fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Construction activity will not be conducted using frozen or saturated soils material or during periods when watershed damage is likely to occur.

If the existing access road, proposed access road, and proposed pad are dry during construction, drilling, and completion activities, water will be applied, as needed, to help facilitate compaction during construction and to minimize soil loss as a result of wind erosion.

A cultural resources survey was conducted and submitted by Montgomery Archaeological Consultants on 10/04/2006 (MOAC Report No. 06-422). A paleontological survey was conducted and submitted by Dr. Wade E Miller on 9/3/2006 (Report of Survey ID No. 83106).

Additional Surface Stipulations: None

LESSEE OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:

PERMITTING AGENT

Nanette Lupcho
EOG Resources, Inc.
1060 East Highway 40
Vernal, UT 84078
(435) 781-9111

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved plan of operations, and any applicable Notice to Lessees. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

The operator or his/her contractor shall contact the BLM office at (435) 781-4400 forty-eight (48) hours prior to construction activities.

CERTIFICATION:

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by EOG Resources, Inc. and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

Please be advised that EOG Resources, Inc. is considered to be the operator of the Hoss Well, located in the NWSE, of Section 32, T8SS, R23E, Uintah County, Utah; Federal land and minerals; and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond Coverage is under Bond # NM 2308.

June 3, 2010
Date

Nanette Lupcho, Regulatory Assistant

EOG RESOURCES, INC.
HOSS #22-32
SECTION 32, T8S, R23E, S.L.B.&M.

PROCEED IN AN EASTERLY, THEN SOUTHERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 3.9 MILES TO THE JUNCTION OF STATE HIGHWAY 45; EXIT RIGHT AND PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 19.2 MILES ON STATE HIGHWAY 45 TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN RIGHT AND PROCEED IN A SOUTHWESTERLY, THEN SOUTHERLY DIRECTION APPROXIMATELY 3.8 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN RIGHT AND PROCEED IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 4.2 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN LEFT AND PROCEED IN A SOUTHERLY, THEN EASTERLY THEN SOUTHERLY DIRECTION APPROXIMATELY 1.6 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE WEST; TURN RIGHT AND PROCEED IN A WESTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 4.6 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NORTHEAST; FOLLOW ROAD FLAGS IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.4 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 37.7 MILES.

T8S, R23E, S.L.B.&M.

EOG RESOURCES, INC.



Well location, HOSS #22-32, located as shown in the NW 1/4 SE 1/4 of Section 32, T8S, R23E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

BENCH MARK 20EAM LOCATED IN THE SE 1/4 OF SECTION 35, T8S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4697 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

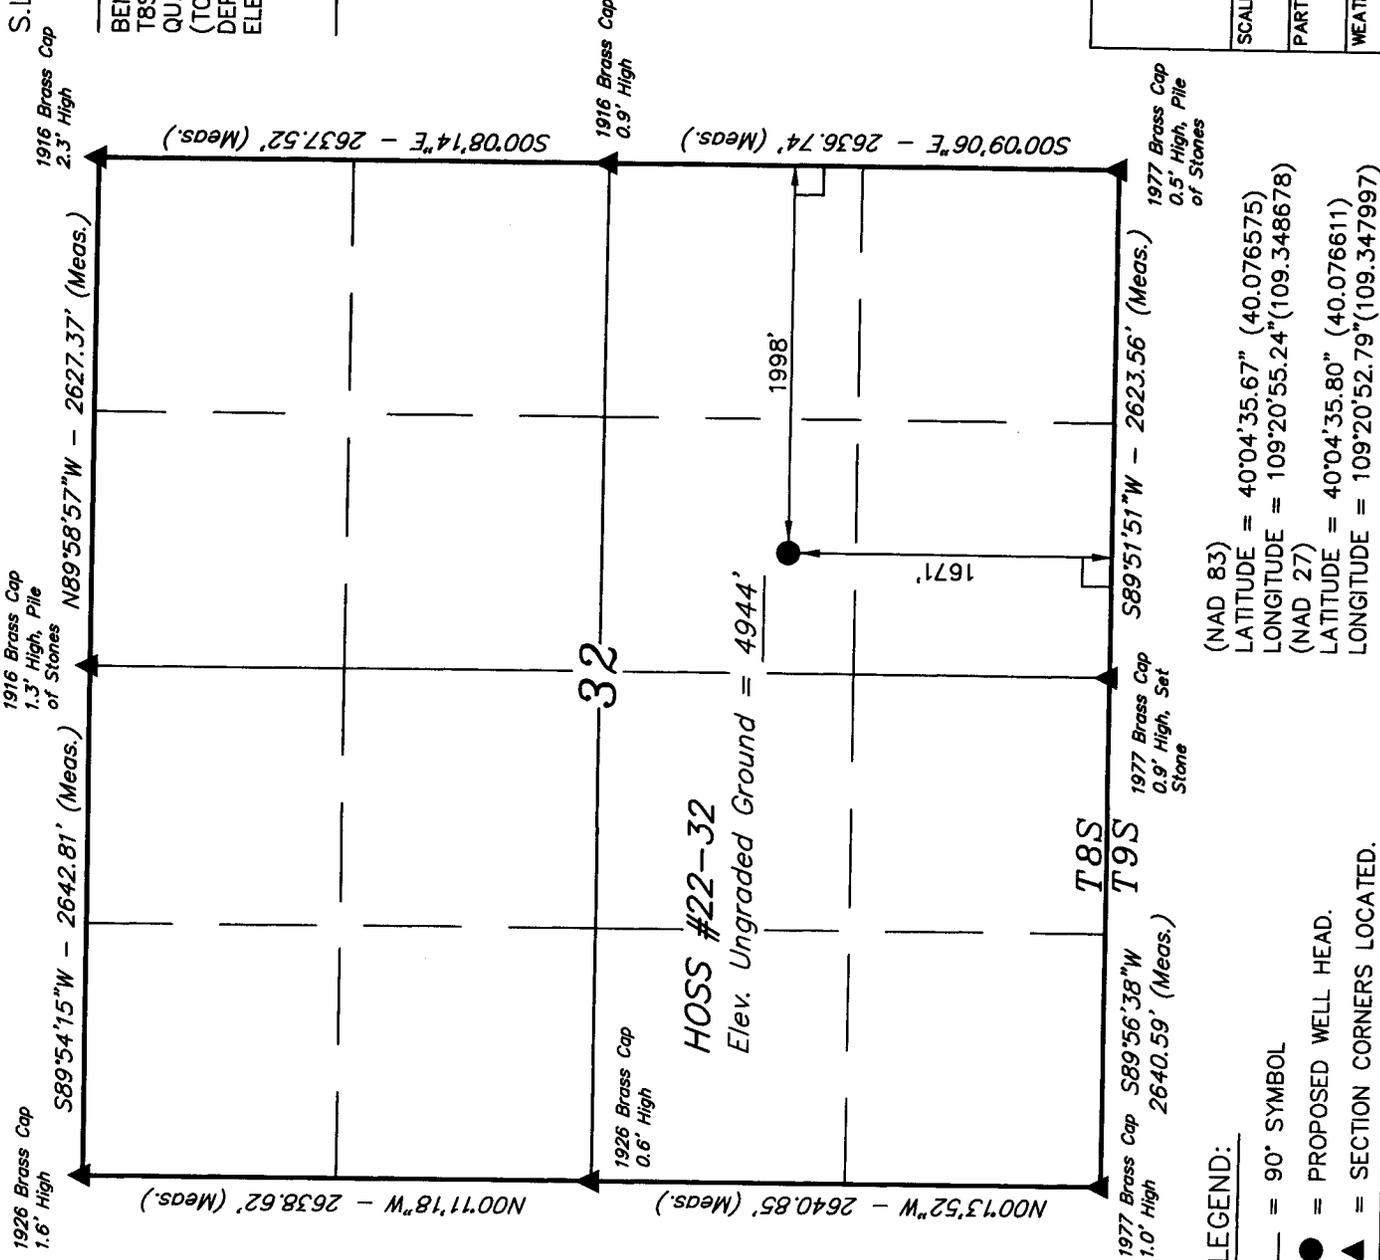

UINTAH ENGINEERING & LAND SURVEYING	
85 SOUTH 200 EAST - VERNAL, UTAH 84078	
(435) 789-1017	
SCALE 1" = 1000'	DATE SURVEYED: 08-01-06
PARTY B.H. F.Y. C.H.	REFERENCES G.L.O. PLAT
WEATHER WARM	FILE
EOG RESOURCES, INC.	

(NAD 83)
 LATITUDE = 40°04'35.67" (40.076575)
 LONGITUDE = 109°20'55.24" (109.348678)
 (NAD 27)
 LATITUDE = 40°04'35.80" (40.076611)
 LONGITUDE = 109°20'52.79" (109.347997)


- LEGEND:
- = 90° SYMBOL
 - = PROPOSED WELL HEAD.
 - ▲ = SECTION CORNERS LOCATED.

EOG RESOURCES, INC.

LOCATION LAYOUT FOR

HOSS #22-32
SECTION 32, T8S, R23E, S.L.B.&M.
1671' FSL 1998' FEL

Proposed Access Road



Approx. Top of Cut Slope

C-21.0'
El. 66.8'

Install CMP as needed

F-10.9'
El. 34.9'

Sta. 3+25

SCALE: 1" = 50'
DATE: 01-04-07
Drawn By: C.H.
REV: 06-04-10


DATA

F-11.9'
El. 33.9'

Round Corners as needed

NOTE:
Earthwork Calculations Require a Fill of 2.1' @ the Location Stake For Balance. All Fill is to be Compacted to a Minimum of 95% of the Maximum Dry Density Obtained by AASHTO Method t-99.

Approx. Toe of Fill Slope



Sta. 1+50

Existing Drainage

CATWALK

PIPE RACKS

C-0.9'
El. 46.7'

F-2.1'
El. 43.7'

DOG HOUSE

135'

C-14.0'
El. 59.8'

F-0.7'
El. 45.1'

RIG

135'

F-11.1'
El. 34.7'

147'

CLOSED SYSTEM

36'

WATER

TRAILER

Existing Drainage

PUMP

MUD SHED

HOPPER

POWER

TOOLS

FUEL

TOILET

FUEL

STORAGE TANK

Sta. 0+50

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

36'

EOG RESOURCES, INC.

FIGURE #2


TYPICAL CROSS SECTIONS FOR

HOSS #22-32



SECTION 32, T8S, R23E, S.L.B.&M.

1671' FSL 1998' FEL

* NOTE:
FILL QUANTITY INCLUDES
5% FOR COMPACTION



DATE: 01-04-07
Drawn By: C.H.
REV: 06-04-10

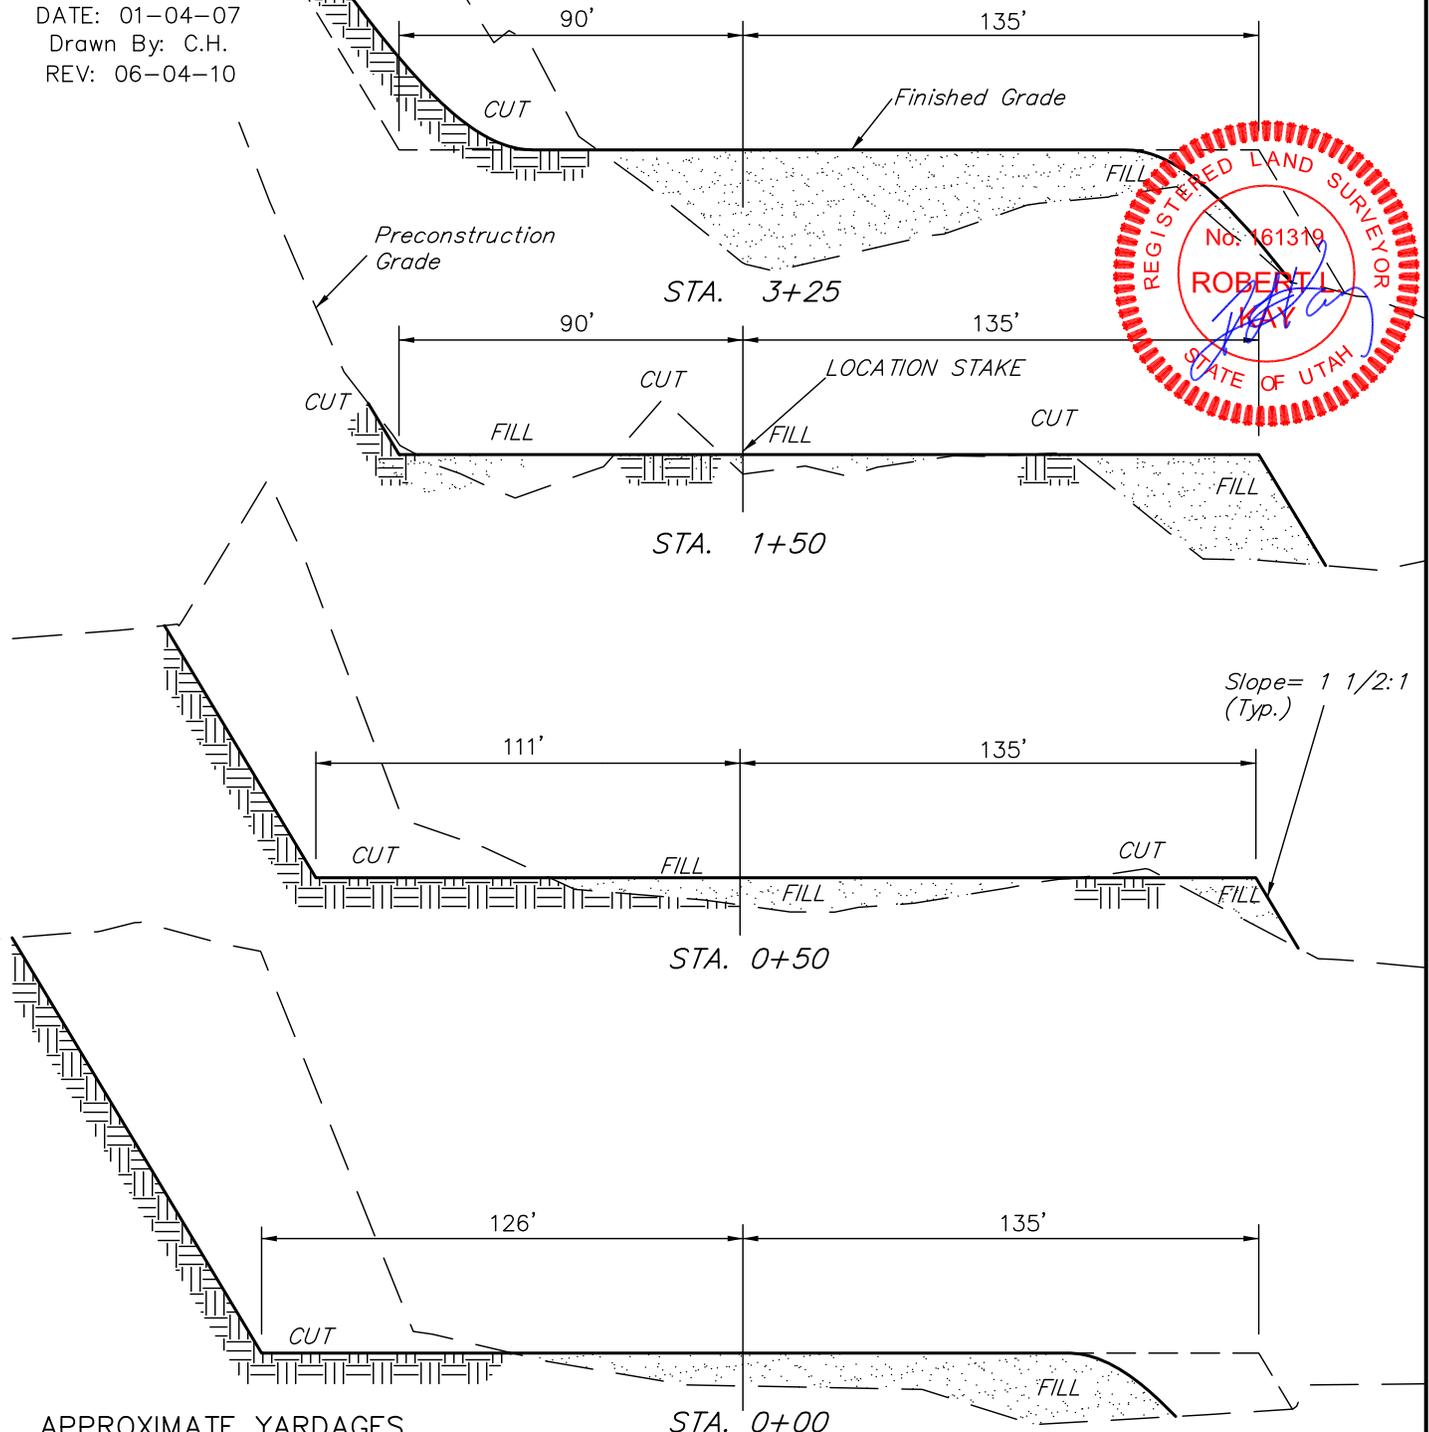

APPROXIMATE YARDAGES

CUT		
(6") Topsoil Stripping	=	2,080 Cu. Yds.
Remaining Location	=	13,710 Cu. Yds.
TOTAL CUT	=	15,790 CU.YDS.
FILL	=	13,710 CU.YDS.

EXCESS MATERIAL	=	2,080 Cu. Yds.
Topsoil	=	2,080 Cu. Yds.
EXCESS UNBALANCE	=	0 Cu. Yds.
(After Interim Rehabilitation)		

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

EOG RESOURCES, INC.

PRODUCTION FACILITY LAYOUT FOR

HOSS #22-32

SECTION 32, T8S, R23E, S.L.B.&M.


1671' FSL 1998' FEL

Proposed Access Road



SCALE: 1" = 50'
DATE: 01-04-07
Drawn By: C.H.

Install CMP
as needed

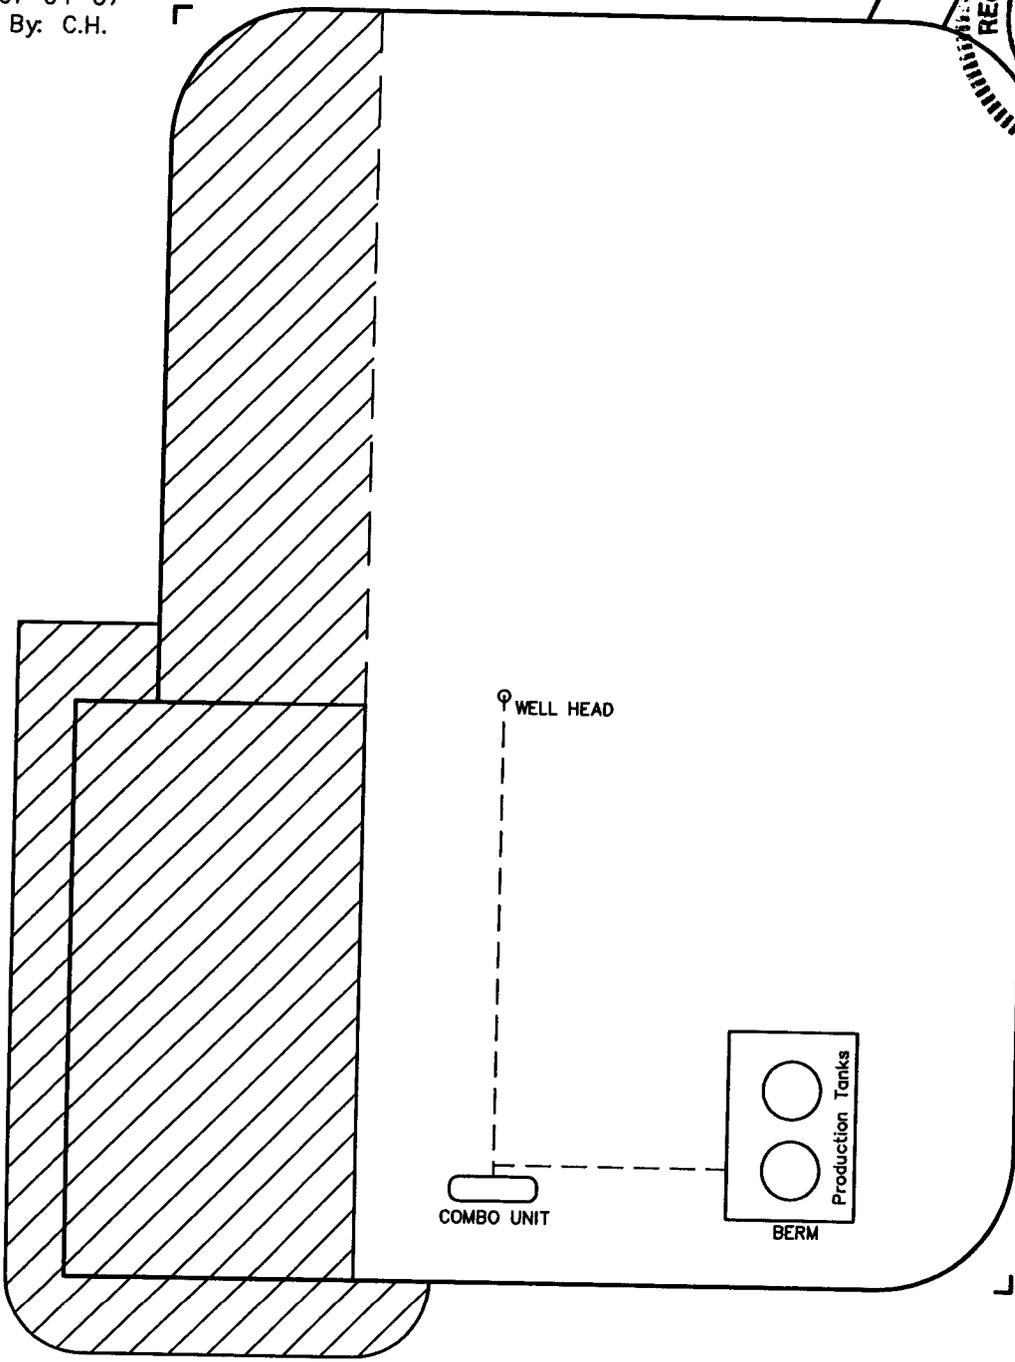

 RE-HABED AREA

EOG RESOURCES, INC.

HOSS #22-32

LOCATED IN UINTAH COUNTY, UTAH
SECTION 32, T8S, R23E, S.L.B.&M.



PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHELRY

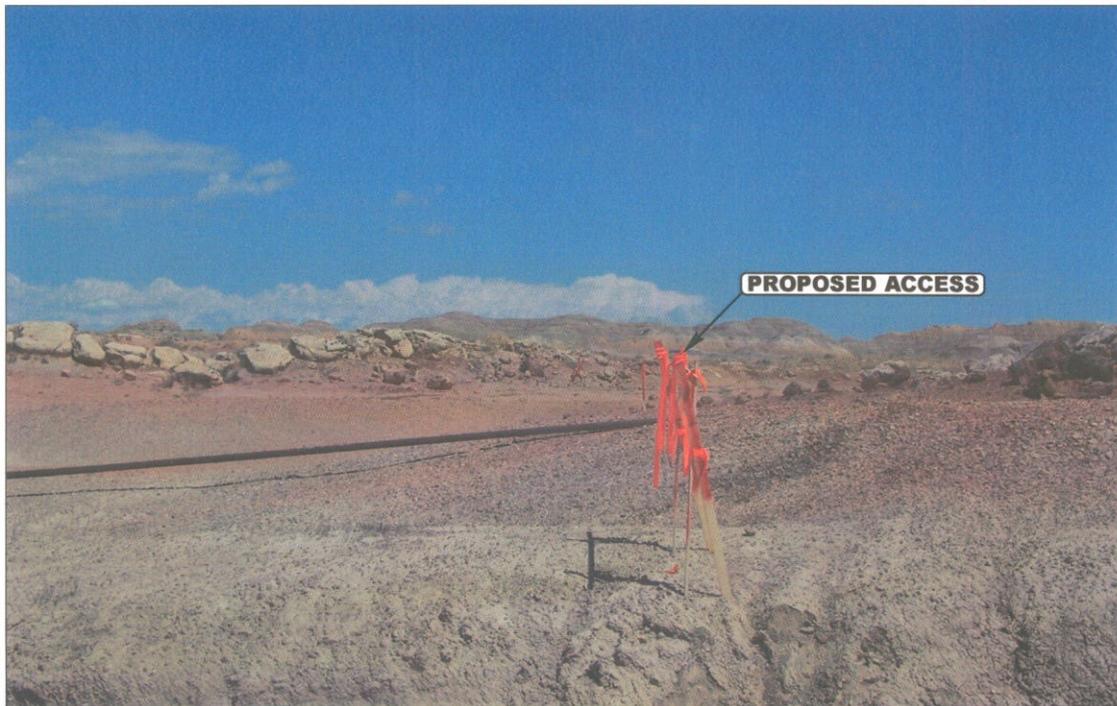


PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: NORTHERLY



- Since 1964 -

**U
E
L
S** Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS

08 07 06
MONTH DAY YEAR

PHOTO


TAKEN BY: B.H.

DRAWN BY: B.C.

REVISED: 00-00-00

R 22
E

R 23
E

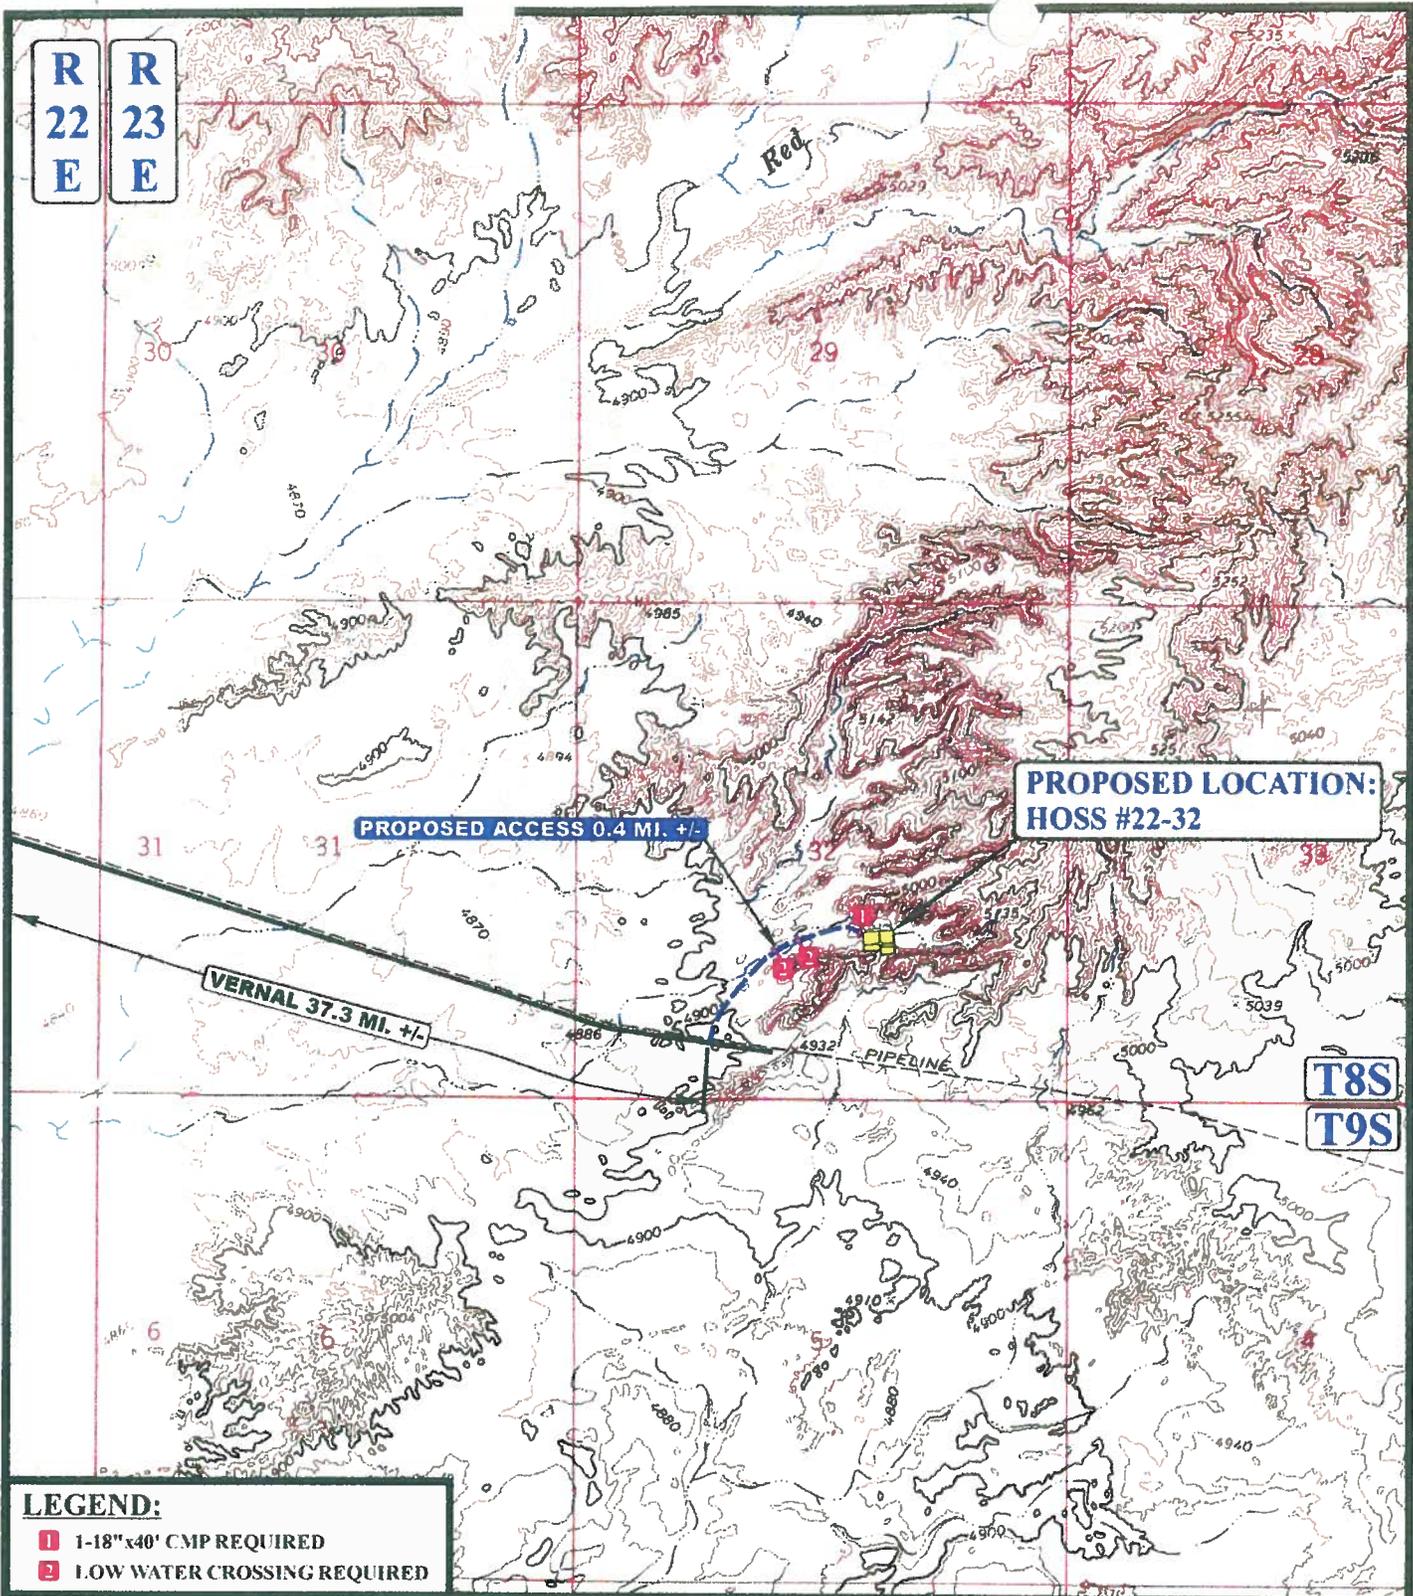

**PROPOSED LOCATION:
HOSS #22-32**

PROPOSED ACCESS 0.4 MI. +/-

VERNAL 37.3 MI. +/-

**T8S
T9S**

LEGEND:
[Red Square] 1-18" x 40' CMP REQUIRED
[Red Circle] LOW WATER CROSSING REQUIRED

LEGEND:
[Solid Line] EXISTING ROAD
[Dashed Line] PROPOSED ACCESS ROAD

EOG RESOURCES, INC.


**HOSS #22-32
SECTION 32, T8S, R23E, S.L.B.&M.
1671' FSL 1998' FEL**

U&L S
Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC MAP
08 07 06
MONTH DAY YEAR
SCALE: 1" = 2000' DRAWN BY: B.C. REV: 10-03-06A.A.

**B
TOPO**

'APIWellNo:43047511690000'

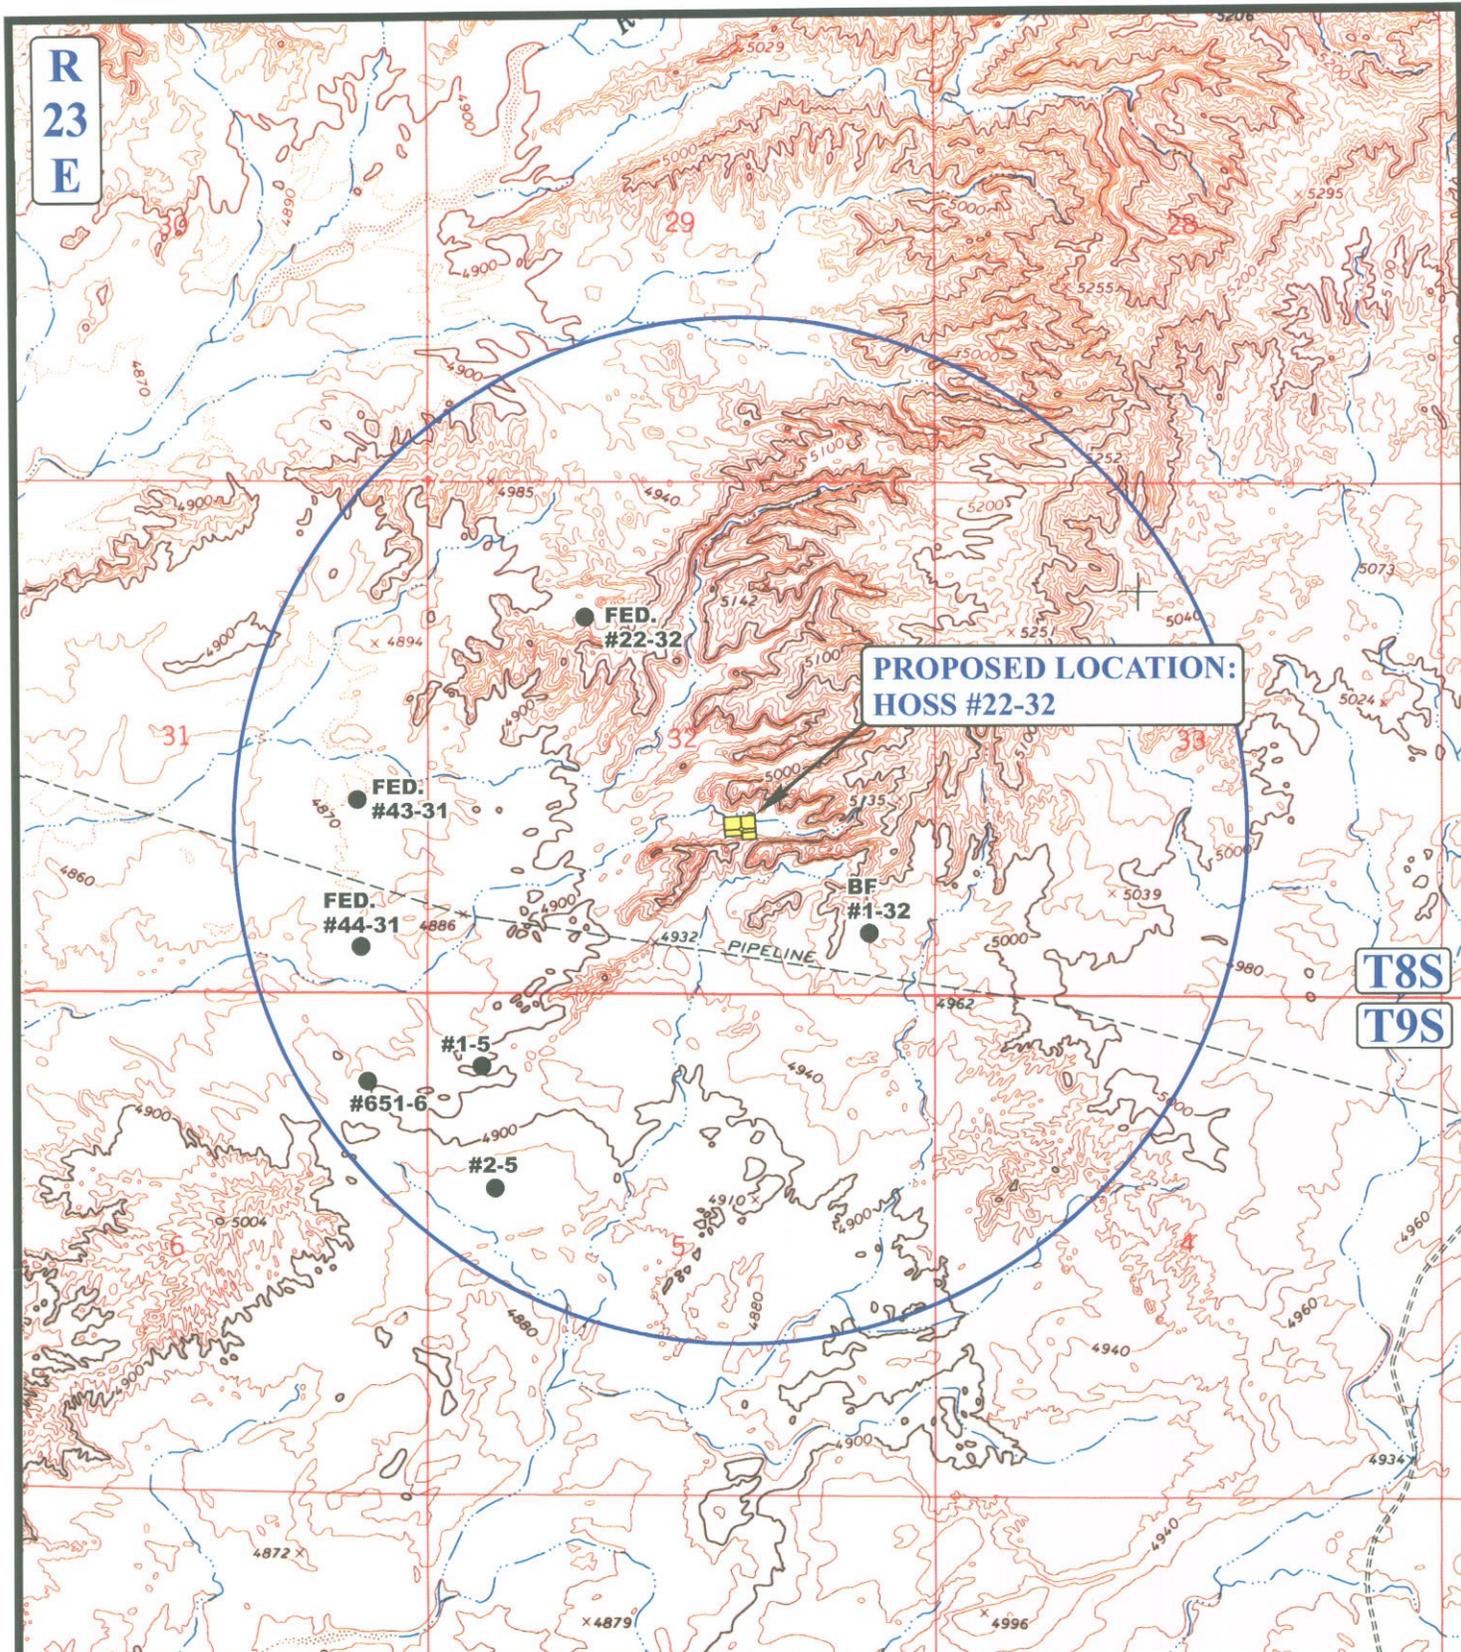

LEGEND:

- ⊘ DISPOSAL WELLS
- PRODUCING WELLS
- ⬮ SHUT IN WELLS
- ⊘ WATER WELLS
- ⬮ ABANDONED WELLS
- ⬮ TEMPORARILY ABANDONED

EOG RESOURCES, INC.

HOSS #22-32
SECTION 32, T8S, R23E, S.L.B.&M.
1671' FSL 1998' FEL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP


08 07 06
 MONTH DAY YEAR

SCALE: 1" = 2000'

DRAWN BY: B.C.

REVISED: 00-00-00



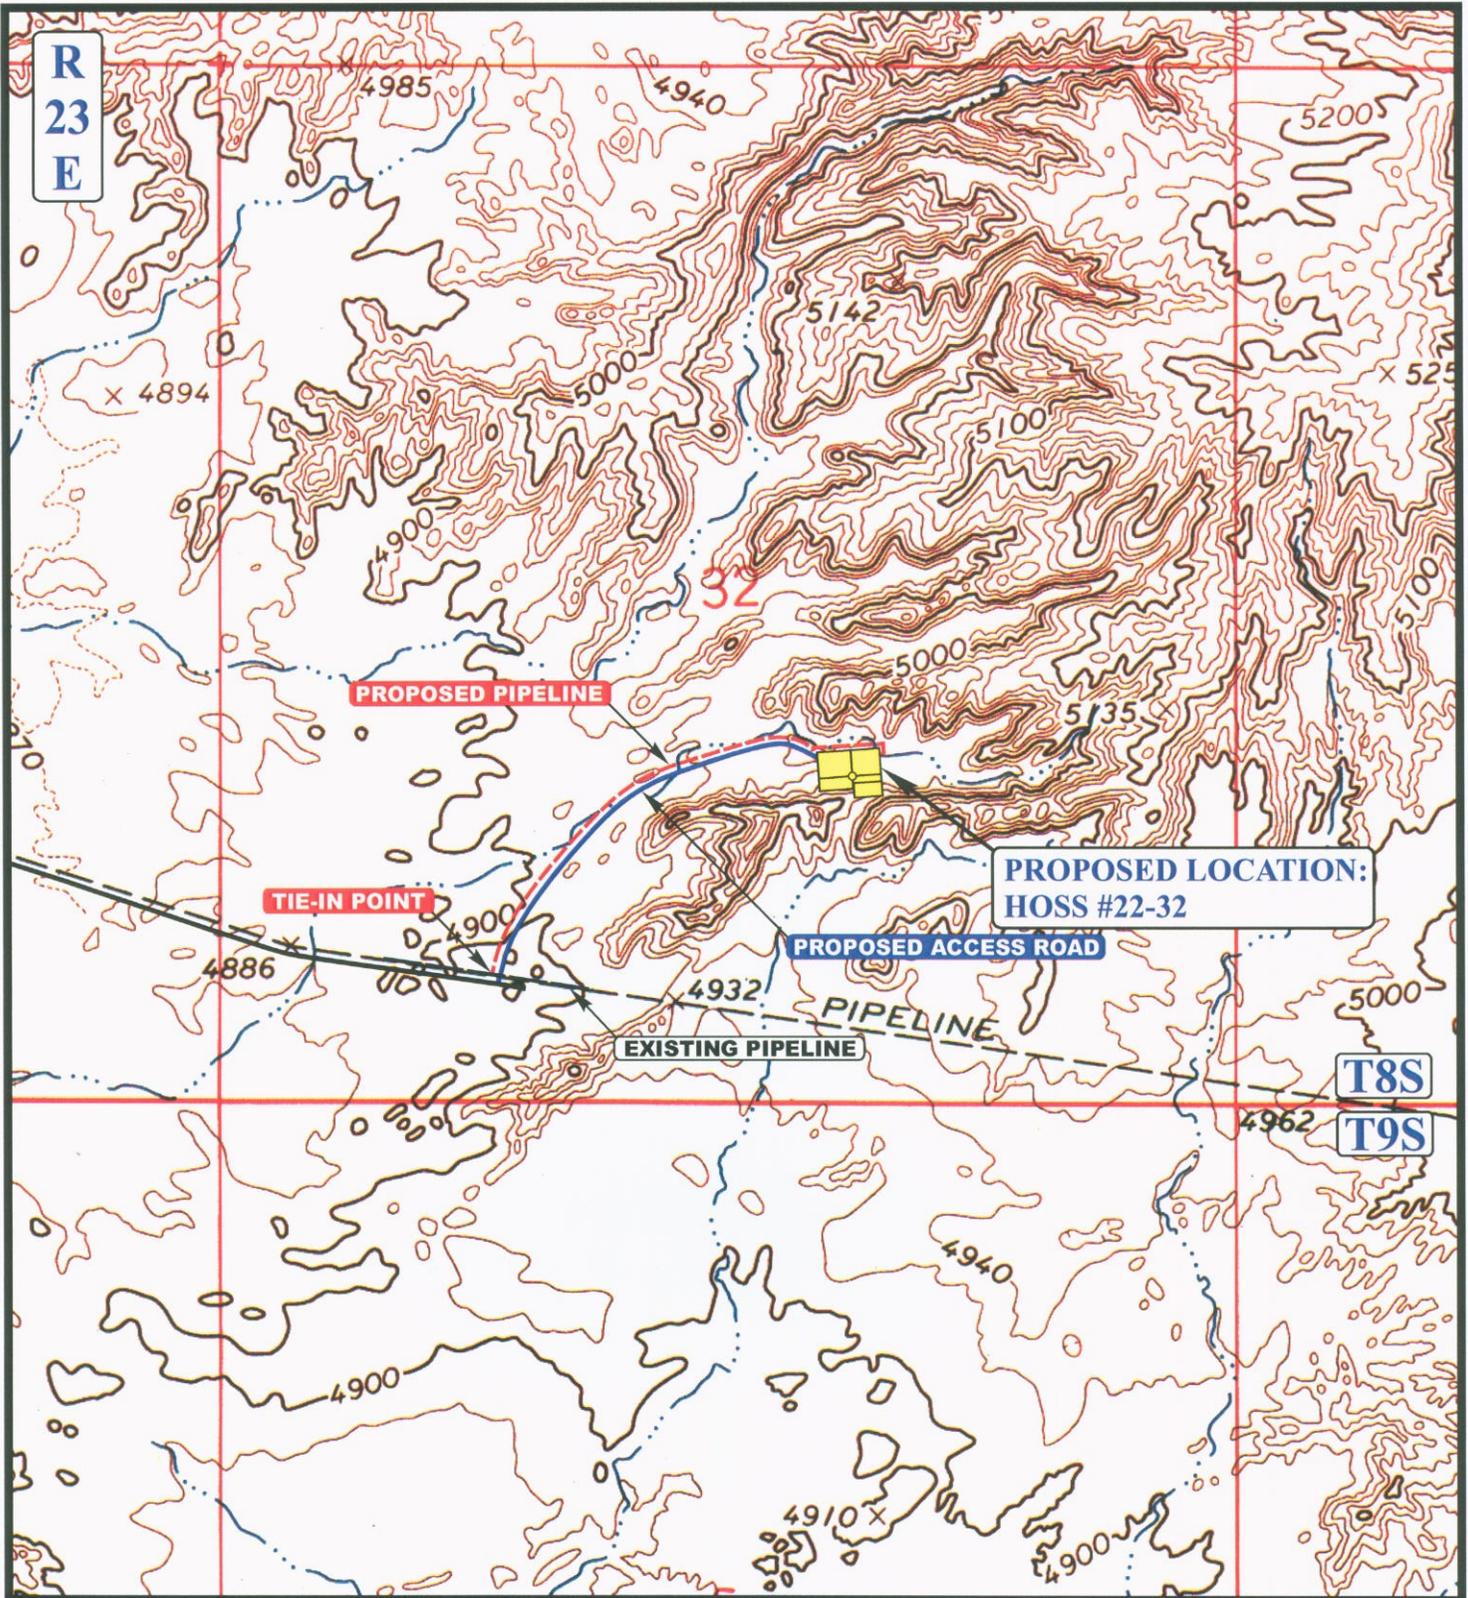

APPROXIMATE TOTAL PIPELINE DISTANCE = 2,710' +/-

LEGEND:

-  PROPOSED ACCESS ROAD
-  EXISTING PIPELINE
-  PROPOSED PIPELINE

EOG RESOURCES, INC.

HOSS #22-32
 SECTION 32, T8S, R23E, S.L.B.&M.
 1671' FSL 1998' FEL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC MAP 09 01 06
 MONTH DAY YEAR
 SCALE: 1" = 1000' DRAWN BY: S.L. REVISED: 00-00-00



STATE OF UTAH)

) ss

COUNTY OF UINTAH)

VERIFICATION

Nanette Lupcho, of lawful age, being first duly sworn upon oath, deposes and says:

She is a Regulatory Assistant of EOG Resources, Inc., of Vernal, Utah. EOG Resources, Inc. is the operator of the following described well:

HOSS 22-32
1671' FSL - 1998' FEL (NWSE)
SECTION 32, T8S, R23E
UINTAH COUNTY, UTAH

EOG Resources, Inc., is the only owner in the well and/or of all contiguous oil and gas leases or drilling units overlying the pool.

On the 19th day of July, 2010 she placed in the United States mail, with postage prepaid, a copy of the attached Application for Commingling in one wellbore for the subject well.

Said envelope which contained these instruments was addressed to the Utah Division of Oil, Gas & Mining, and Bureau of Land Management

Further affiant saith not.



Nanette Lupcho
Regulatory Assistant

Subscribed and sworn before me this 19th day of July, 2010.



Notary Public

My Commission Expires: April 18, 2012



R 23 E

FED 22-32


32

HOSS 22-32


BADLND 1-32



U-56965

T
8
S

 HOSS 22-32

 Badlands Unit Outline

 Wasatch/Mesaverde/Mancos Fms P.A. "C"



Denver Division

EXHIBIT "A"

HOSS 22-32

Commingling Application

Uintah County, Utah

Scale: 1" = 1000'

D:\utah\Commingling\page_Hoss22-32_commingling2.org Layout1



Author GT

Sep 15, 2006 - 9:08am

API Number: 4304751169
Well Name: HOSS 22-32
Township 08.0 S Range 23.0 E Section 32
Meridian: SLBM
Operator: EOG RESOURCES, INC.

Map Prepared:
 Map Produced by Diana Mason

- | Units | Wells Query |
|---------------|------------------------------------|
| ACTIVE | Well - all other values |
| EXPLORATORY | APD - Approved Permit |
| GAS STORAGE | DRL - Spudded (Drilling Commenced) |
| NF PP OIL | GW - Gas Injection |
| NF SECONDARY | GS - Gas Storage |
| PI OIL | LA - Location Abandoned |
| PP GAS | LOC - New Location |
| PP GEOTHERMAL | OPS - Operation Suspended |
| PP OIL | PA - Plugged Abandoned |
| SECONDARY | PGW - Producing Gas Well |
| TERMINATED | POW - Producing Oil Well |
| Sections | RET - Returned APD |
| Township | SGW - Shut-in Gas Well |
| | SOW - Shut-in Oil Well |
| | TA - Temp. Abandoned |
| | TW - Test Well |
| | WDW - Water Disposal |
| | WW - Water Injection Well |
| | WSW - Water Supply Well |

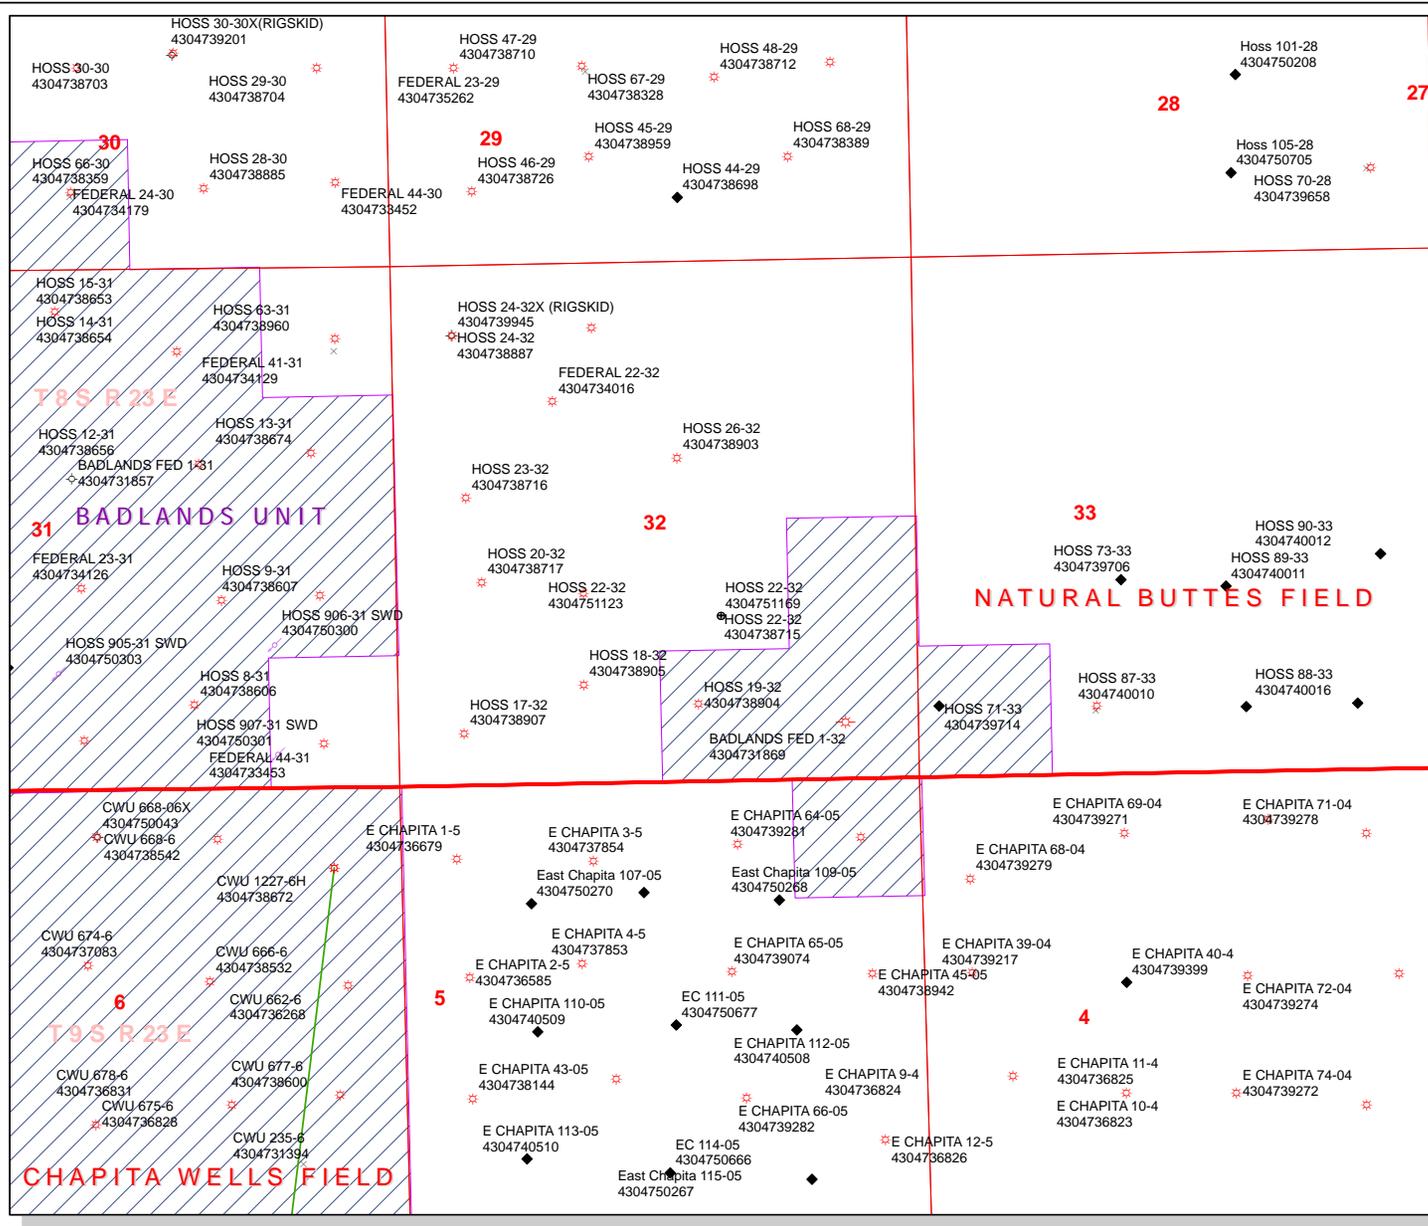

BADLANDS UNIT

NATURAL BUTTES FIELD

CHAPITA WELLS FIELD



EOG Resources, Inc.
600 Seventeenth Street
Suite 1000N
Denver, CO 80202
Main: 303-572-9000
Land Fax: 303-824-5401

September 16, 2010

State of Utah
Division of Oil, Gas and Mining
P.O. Box 145801
Salt Lake City, Utah 84114-5801

Attention: Ms. Diana Mason

RE: Request for Exception to Location
and Siting of Wells
Hoss 22-32
NWSE of Sec. 32-8S-23E, SLM
Uintah County, Utah
Ponderosa Prospect
59977-G06, 0078810-000

Ladies and Gentlemen:

EOG Resources, Inc. ("EOG") proposes and respectfully requests permission to drill the Hoss 22-32, a 9,730' Wasatch/Mesaverde test well, at a location 1,671' FSL, 1,998' FEL (NW/4SE/4) of Section 32, Township 8 South, Range 23 East, SLM, Uintah County, Utah, which is not a location at which a well could be drilled in compliance with General Rule R649-3-2.

EOG endeavored to stake the Hoss 22-32 well at a legal location in accordance with General Rule R649-3-2, but found that a legal location could not be found due to topography. Therefore, EOG is requesting this exception location.

Enclosed is a copy of the survey plat for the proposed well and another plat labeled Exhibit "A" which depicts the outlines of the 40-acre drilling units established in General Rule R649-3-2 and the location at which EOG requests permission to drill the proposed Hoss 22-32 well. There are no other owners within the 460' radius of the proposed Hoss 22-32 well (see enclosed Exhibit "B").

EOG respectfully requests the Utah Division of Oil, Gas and Mining review and grant administrative approval of this application for an exception well location and permission to drill the proposed Wasatch/Mesaverde formation well described herein at its earliest opportunity.

State of Utah
Division of Oil, Gas and Mining
September 16, 2010
Page 2 of 2

If you have any questions or need any additional information, please do not hesitate to contact the undersigned.

Yours very truly,

EOG RESOURCES, INC.

A handwritten signature in cursive script that reads "Debbie Spears".

Debbie Spears
Sr. Land Associate

/das

Enclosures

M:\das\exceptionlocation\hoss22-32.doc

cc: Kaylene Gardner (with copies of enclosures)
Denver Well File (with copies of enclosures)

T8S, R23E, S.L.B.&M.

EOG RESOURCES, INC.


Well location, HOSS #22-32, located as shown in the NW 1/4 SE 1/4 of Section 32, T8S, R23E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

BENCH MARK 20EAM LOCATED IN THE SE 1/4 OF SECTION 35, T8S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4697 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

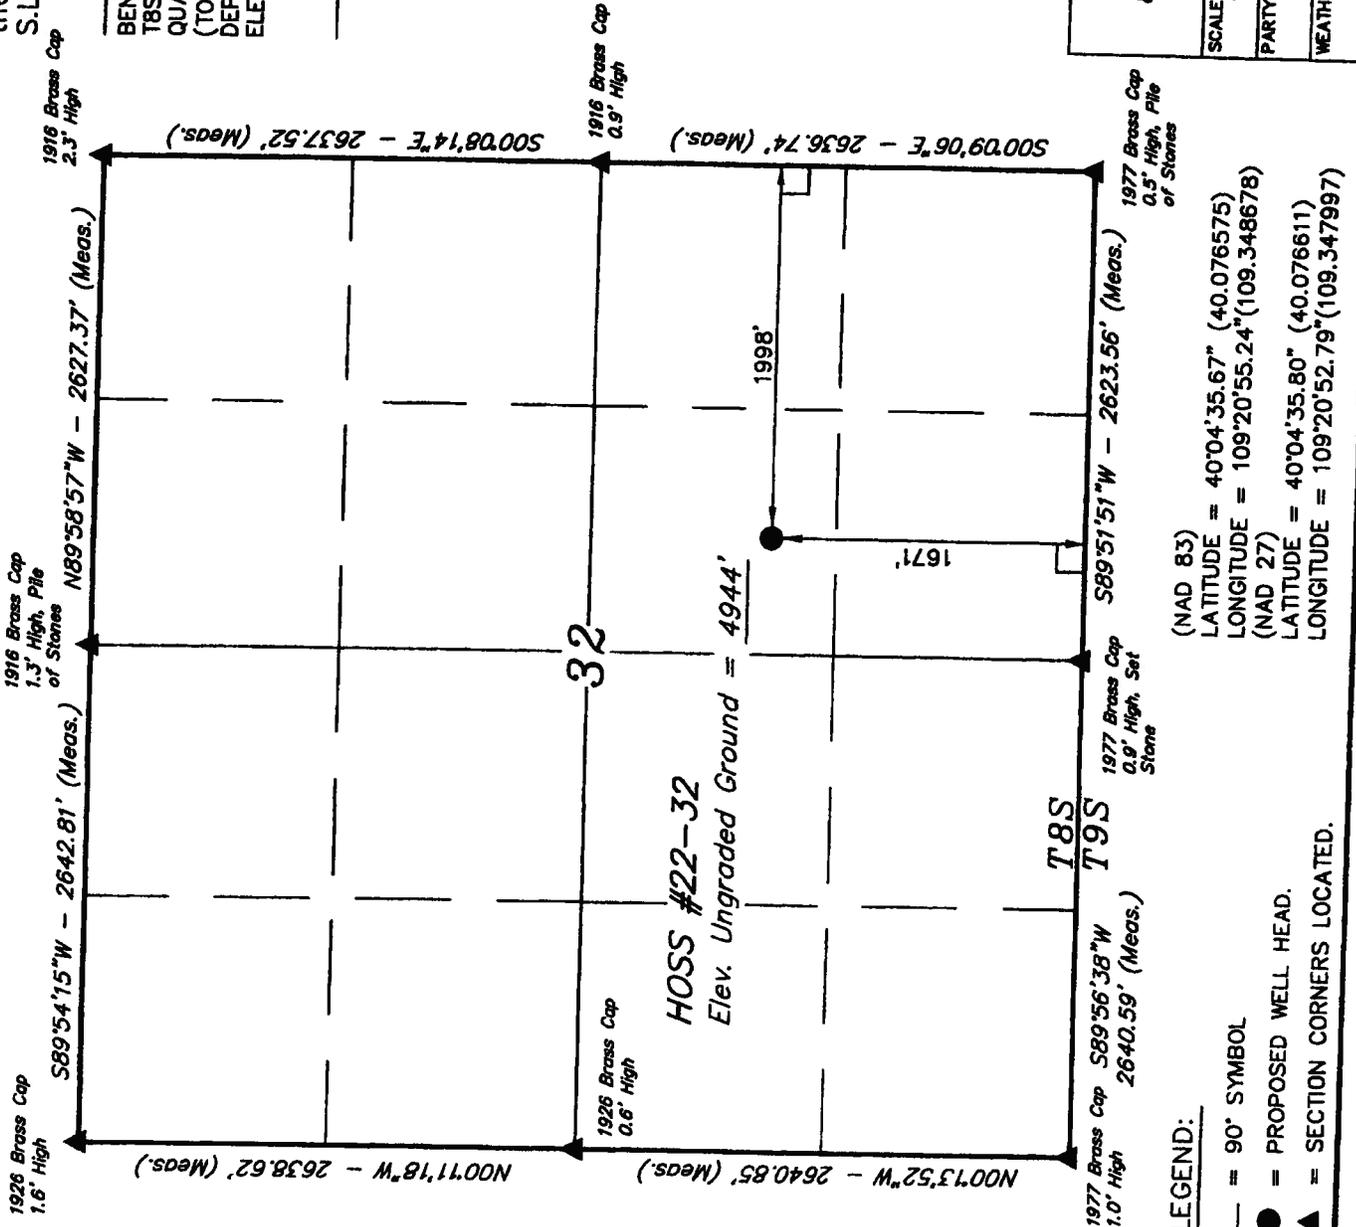

(NAD 83)
 LATITUDE = 40°04'35.67" (40.076575)
 LONGITUDE = 109°20'55.24" (109.348678)
 (NAD 27)
 LATITUDE = 40°04'35.80" (40.076611)
 LONGITUDE = 109°20'52.79" (109.347997)


LEGEND:

- = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.



UINTAH ENGINEERING & LAND SURVEYING	
85 SOUTH 200 EAST - VERNAL, UTAH 84078	
(435) 789-1017	
SCALE 1" = 1000'	DATE SURVEYED: 08-01-06
PARTY B.H. F.Y. C.H.	REFERENCES G.L.O. PLAT
WEATHER WARM	FILE
EOG RESOURCES, INC.	

R 23 E

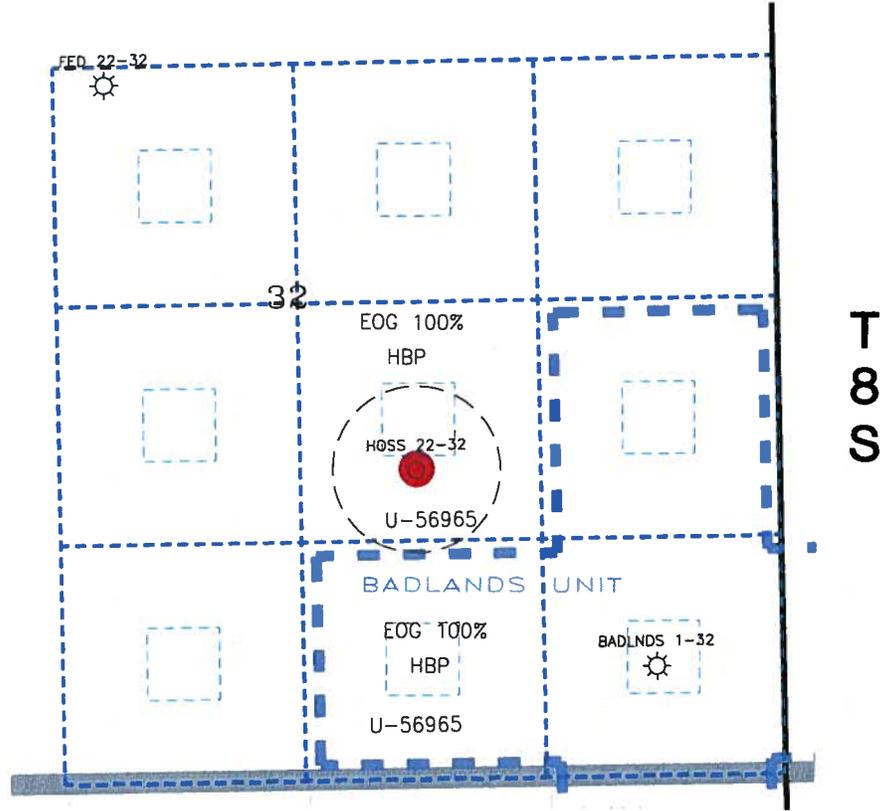

 Oil or Gas Well Location Pattern pursuant to Utah Administrative Code Rule R 649-3-2

 Legal window within which an oil and gas well could be drilled in compliance with R 649-3-2.

 460' Radius

 Locations at which oil or gas wells have been drilled

 Location at which applicant requests permission to drill the proposed Hoss 22-32 Well:
1671' FSL, 1998' FEL (NWSE) of Sec. 32, T8S, R23E

Scale: 1"=1000'
0 1/4 1/2 Mile



Exhibit "A"

 Denver Division

Application for
Exception Well Location

HOSS 22-32 Well

UINTAH COUNTY, UTAH

Scale:
1"=1000'


D:\utah\exception_plats\
Hoss22-32\exc.dwg
exc_A_40

Author

gt

Sep 15, 2010 -
8:32am

R 23 E

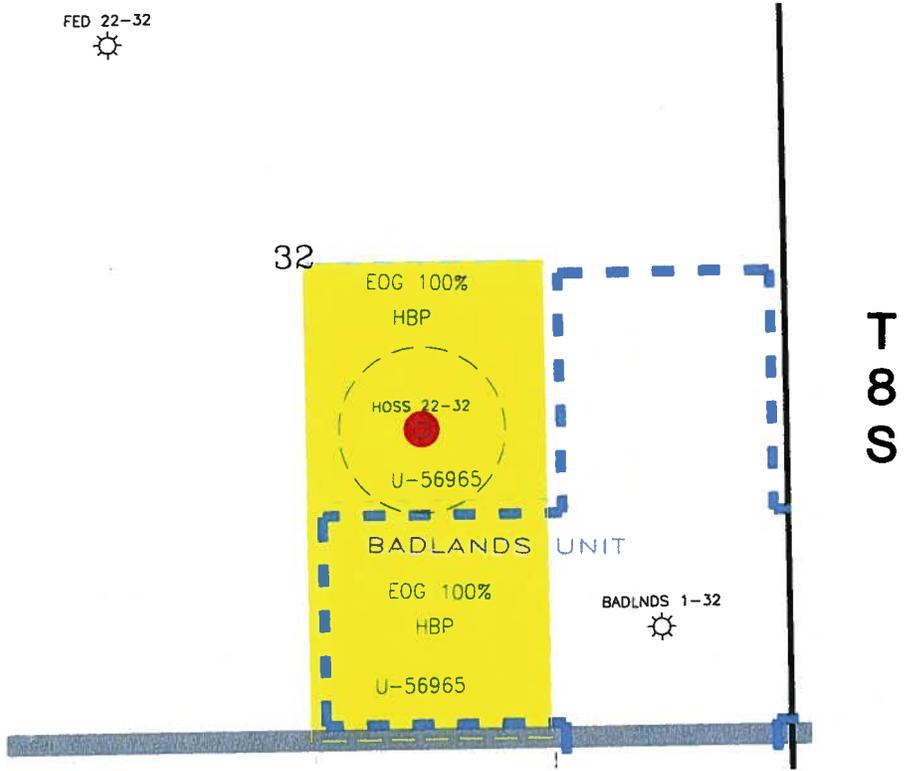

Working Interest

 EOG 100%

 Location at which applicant requests permission to drill the proposed Hoss 22-32 Well:
1671' FSL, 1998' FEL (NWSE) of Sec. 32, T8S, R23E

Exhibit "B"




Denver Division

Application for
Exception Well Location

HOSS 22-32 Well

UINTAH COUNTY, UTAH



Scale: 1"=1000'

D:\utah\exception_plat\Hoss22-32exc.dwg
exc_B_40

Author

Sep 15, 2010 - 8:32am

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 7/19/2010

API NO. ASSIGNED: 43047511690000

WELL NAME: HOSS 22-32

OPERATOR: EOG Resources, Inc. (N9550)

PHONE NUMBER: 435 781-9157

CONTACT: Nanette Lupcho

PROPOSED LOCATION: NWSE 32 080S 230E

Permit Tech Review:

SURFACE: 1671 FSL 1998 FEL

Engineering Review:

BOTTOM: 1671 FSL 1998 FEL

Geology Review:

COUNTY: UINTAH

LATITUDE: 40.07659

LONGITUDE: -109.34799

UTM SURF EASTINGS: 640865.00

NORTHINGS: 4437355.00

FIELD NAME: NATURAL BUTTES

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU56965

PROPOSED PRODUCING FORMATION(S): MESA VERDE

SURFACE OWNER: 1 - Federal

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

- PLAT
- Bond: FEDERAL - NM2308
- Potash
- Oil Shale 190-5
- Oil Shale 190-3
- Oil Shale 190-13
- Water Permit: 49-225
- RDCC Review:
- Fee Surface Agreement
- Intent to Commingle

Commingling Approved

LOCATION AND SITING:

- R649-2-3.
 - Unit:**
 - R649-3-2. General
 - R649-3-3. Exception
 - Drilling Unit
 - Board Cause No:** R649-3-3
 - Effective Date:**
 - Siting:**
 - R649-3-11. Directional Drill
-

Comments: Presite Completed

Stipulations: 1 - Exception Location - bhill
3 - Commingling - ddoucet
4 - Federal Approval - dmason
23 - Spacing - dmason



GARY R. HERBERT
Governor

GREGORY S. BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: HOSS 22-32
API Well Number: 43047511690000
Lease Number: UTU56965
Surface Owner: FEDERAL
Approval Date: 9/27/2010

Issued to:

EOG Resources, Inc., 1060 East Highway 40, Vernal, UT 84078

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of R649-3-3. The expected producing formation or pool is the MESA VERDE Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

Exception Location:

Appropriate information has been submitted to DOGM and administrative approval of the requested exception location is hereby granted.

Commingle:

Administrative approval for commingling the production from the Wasatch formation and the Mesaverde formation in this well is hereby granted. Appropriate information has been submitted to DOGM in accordance with R649-3-22. No written objections from owners were received by DOGM.

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable

after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well – contact Carol Daniels at 801-538-5284 (please leave a voicemail message if not available)
OR
submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at <https://oilgas.ogm.utah.gov>

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

Approved By:



Acting Associate Director, Oil & Gas

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU56965
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: HOSS 22-32
2. NAME OF OPERATOR: EOG Resources, Inc.	9. API NUMBER: 43047511690000
3. ADDRESS OF OPERATOR: 1060 East Highway 40 , Vernal, UT, 84078	PHONE NUMBER: 435 781-9111 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1671 FSL 1998 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWSE Section: 32 Township: 08.0S Range: 23.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 9/14/2011	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: 09/19/2011
By: 

NAME (PLEASE PRINT) Michelle Robles	PHONE NUMBER 307 276-4842	TITLE Regulatory Assistant
SIGNATURE N/A	DATE 9/14/2011	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047511690000

API: 43047511690000

Well Name: HOSS 22-32

Location: 1671 FSL 1998 FEL QTR NWSE SEC 32 TWP 080S RNG 230E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 9/27/2010

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Michelle Robles

Date: 9/14/2011

Title: Regulatory Assistant **Representing:** EOG RESOURCES, INC.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9 5. LEASE DESIGNATION AND SERIAL NUMBER: UTU56965
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	6. IF INDIAN, ALLOTTEE OR TRIBE NAME: 7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: HOSS 22-32
2. NAME OF OPERATOR: EOG Resources, Inc.	9. API NUMBER: 43047511690000
3. ADDRESS OF OPERATOR: 600 17th Street, Suite 1000 N , Denver, CO, 80202	PHONE NUMBER: 435 781-9111 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1671 FSL 1998 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWSE Section: 32 Township: 08.0S Range: 23.0E Meridian: S	9. FIELD and POOL or WILDCAT: NATURAL BUTTES COUNTY: UINTAH STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 8/28/2012	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the Utah Division of Oil, Gas and Mining

Date: August 28, 2012

By:

NAME (PLEASE PRINT) Vail Nazzaro	PHONE NUMBER 303 824-5590	TITLE Sr. Regulatory Assistant
SIGNATURE N/A	DATE 8/28/2012	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047511690000

API: 43047511690000

Well Name: HOSS 22-32

Location: 1671 FSL 1998 FEL QTR NWSE SEC 32 TWP 080S RNG 230E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 9/27/2010

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

Signature: Vail Nazzaro

Date: 8/28/2012

Title: Sr. Regulatory Assistant Representing: EOG RESOURCES, INC.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	5. LEASE DESIGNATION AND SERIAL NUMBER: UTU56965
1. TYPE OF WELL Gas Well	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: EOG Resources, Inc.	7. UNIT or CA AGREEMENT NAME:
3. ADDRESS OF OPERATOR: 600 17th Street, Suite 1000 N , Denver, CO, 80202	8. WELL NAME and NUMBER: HOSS 22-32
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1671 FSL 1998 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWSE Section: 32 Township: 08.0S Range: 23.0E Meridian: S	9. API NUMBER: 43047511690000
9. FIELD and POOL or WILDCAT: NATURAL BUTTES	COUNTY: UINTAH
9. FIELD and POOL or WILDCAT: NATURAL BUTTES	STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 8/29/2013	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the Utah Division of Oil, Gas and Mining

Date: September 12, 2013

By:

NAME (PLEASE PRINT) Vail Nazzaro	PHONE NUMBER 303 824-5590	TITLE Sr. Regulatory Assistant
SIGNATURE N/A	DATE 8/29/2013	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047511690000

API: 43047511690000

Well Name: HOSS 22-32

Location: 1671 FSL 1998 FEL QTR NWSE SEC 32 TWNP 080S RNG 230E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 9/27/2010

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Vail Nazzaro

Date: 8/29/2013

Title: Sr. Regulatory Assistant Representing: EOG RESOURCES, INC.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
5. LEASE DESIGNATION AND SERIAL NUMBER: UTU56965	
6. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
7. UNIT or CA AGREEMENT NAME:	
8. WELL NAME and NUMBER: HOSS 22-32	
9. API NUMBER: 43047511690000	
9. FIELD and POOL or WILDCAT: NATURAL BUTTES	
COUNTY: UINTAH	
STATE: UTAH	

SUNDRY NOTICES AND REPORTS ON WELLS
 Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL Gas Well	
2. NAME OF OPERATOR: EOG RESOURCES, INC.	
3. ADDRESS OF OPERATOR: 600 17th Street, Suite 1000 N , Denver, CO, 80202	PHONE NUMBER: 435 781-9111 Ext
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1671 FSL 1998 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NWSE Section: 32 Township: 08.0S Range: 23.0E Meridian: S	

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 9/4/2014	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
 EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the
September 15, 2014
Oil, Gas and Mining

Date: _____
By:

NAME (PLEASE PRINT) Donna J Skinner	PHONE NUMBER 303 262-9467	TITLE Sr. Regulatory Assistant
SIGNATURE N/A	DATE 9/4/2014	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047511690000

API: 43047511690000

Well Name: HOSS 22-32

Location: 1671 FSL 1998 FEL QTR NWSE SEC 32 TWNP 080S RNG 230E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 9/27/2010

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

Signature: Donna J Skinner

Date: 9/4/2014

Title: Sr. Regulatory Assistant Representing: EOG RESOURCES, INC.



GARY R. HERBERT
Governor

SPENCER J. COX
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

November 19, 2015

EOG Resources, Inc.
600 17th Street, Suite 1000 N
Denver, CO 80202

Re: APDs Rescinded for EOG Resources Inc., Uintah County

Ladies and Gentlemen:

Enclosed find the list of APDs that is being rescinded. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded as of November 19, 2015.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal



43-047-39612	CWU 1349-27
43-047-40371	CWU 1368-30
43-047-40372	CWU 1371-30
43-047-40373	CWU 1406-34
43-047-50730	CWU 1453-29
43-047-50745	HOSS 151-20
43-047-50747	HOSS 153-20
43-047-50764	HOSS 135-17
43-047-51169	HOSS 22-32



GARY R. HERBERT
Governor

SPENCER J. COX
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

November 19, 2015

EOG Resources, Inc.
600 17th Street, Suite 1000 N
Denver, CO 80202

Re: APDs Rescinded for EOG Resources Inc., Uintah County


Ladies and Gentlemen:

Enclosed find the list of APDs that is being rescinded. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded as of November 19, 2015.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal

43-047-39612	CWU 1349-27
43-047-40371	CWU 1368-30
43-047-40372	CWU 1371-30
43-047-40373	CWU 1406-34
43-047-50730	CWU 1453-29
43-047-50745	HOSS 151-20
43-047-50747	HOSS 153-20
43-047-50764	HOSS 135-17
43-047-51169	HOSS 22-32