

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT

<b>APPLICATION FOR PERMIT TO DRILL</b>						<b>1. WELL NAME and NUMBER</b> GMBU D-2-9-17				
<b>2. TYPE OF WORK</b> DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>						<b>3. FIELD OR WILDCAT</b> MONUMENT BUTTE				
<b>4. TYPE OF WELL</b> Oil Well Coalbed Methane Well: NO						<b>5. UNIT or COMMUNITIZATION AGREEMENT NAME</b> GMBU (GRRV)				
<b>6. NAME OF OPERATOR</b> NEWFIELD PRODUCTION COMPANY						<b>7. OPERATOR PHONE</b> 435 646-4825				
<b>8. ADDRESS OF OPERATOR</b> Rt 3 Box 3630 , Myton, UT, 84052						<b>9. OPERATOR E-MAIL</b> mcrozier@newfield.com				
<b>10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE)</b> ML-45555			<b>11. MINERAL OWNERSHIP</b> FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>			<b>12. SURFACE OWNERSHIP</b> FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>				
<b>13. NAME OF SURFACE OWNER (if box 12 = 'fee')</b>						<b>14. SURFACE OWNER PHONE (if box 12 = 'fee')</b>				
<b>15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')</b>						<b>16. SURFACE OWNER E-MAIL (if box 12 = 'fee')</b>				
<b>17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')</b>			<b>18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS</b> YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>			<b>19. SLANT</b> VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/>				
<b>20. LOCATION OF WELL</b>		<b>FOOTAGES</b>		<b>QTR-QTR</b>	<b>SECTION</b>	<b>TOWNSHIP</b>	<b>RANGE</b>	<b>MERIDIAN</b>		
LOCATION AT SURFACE		809 FNL 2225 FWL		NENW	2	9.0 S	17.0 E	S		
Top of Uppermost Producing Zone		287 FNL 1741 FWL		NENW	2	9.0 S	17.0 E	S		
At Total Depth		100 FNL 1585 FWL		NENW	2	9.0 S	17.0 E	S		
<b>21. COUNTY</b> UINTAH			<b>22. DISTANCE TO NEAREST LEASE LINE (Feet)</b> 100			<b>23. NUMBER OF ACRES IN DRILLING UNIT</b> 20				
			<b>25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed)</b> 990			<b>26. PROPOSED DEPTH</b> MD: 6334 TVD: 6334				
<b>27. ELEVATION - GROUND LEVEL</b> 5019			<b>28. BOND NUMBER</b> B001834			<b>29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE</b> 437478				
<b>Hole, Casing, and Cement Information</b>										
<b>String</b>	<b>Hole Size</b>	<b>Casing Size</b>	<b>Length</b>	<b>Weight</b>	<b>Grade &amp; Thread</b>	<b>Max Mud Wt.</b>	<b>Cement</b>	<b>Sacks</b>	<b>Yield</b>	<b>Weight</b>
SURF	12.25	8.625	0 - 300	24.0	J-55 ST&C	8.3	Class G	138	1.17	15.8
PROD	7.875	5.5	0 - 6334	15.5	J-55 LT&C	8.3	Premium Lite High Strength	299	3.26	11.0
							50/50 Poz	363	1.24	14.3
<b>ATTACHMENTS</b>										
<b>VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES</b>										
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER					<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN					
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)					<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER					
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)					<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP					
<b>NAME</b> Mandie Crozier				<b>TITLE</b> Regulatory Tech				<b>PHONE</b> 435 646-4825		
<b>SIGNATURE</b>				<b>DATE</b> 04/07/2011				<b>EMAIL</b> mcrozier@newfield.com		
<b>API NUMBER ASSIGNED</b> 43047515530000				<b>APPROVAL</b>				 Permit Manager		

NEWFIELD PRODUCTION COMPANY  
 GMBU D-2-9-17  
 AT SURFACE: NE/NW SECTION 2, T9S, R17E  
 UTAH COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0' – 1430'
Green River	1430'
Wasatch	6100'
<b>Proposed TD</b>	<b>6334'</b>

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation (Oil)	1430' – 6100'
-----------------------------	---------------

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 300'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO <sub>3</sub> ) (mg/l)
Dissolved Bicarbonate (NaHCO <sub>3</sub> ) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO <sub>4</sub> ) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. **PROPOSED CASING PROGRAM**

a. **Casing Design: GMBU D-2-9-17**

Size	Interval		Weight	Grade	Coupling	Design Factors		
	Top	Bottom				Burst	Collapse	Tension
Surface casing 8-5/8"	0'	300'	24.0	J-55	STC	2,950 17.53	1,370 14.35	244,000 33.89
Prod casing 5-1/2"	0'	6,334'	15.5	J-55	LTC	4,810 2.39	4,040 2.00	217,000 2.21

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe =	13.0 ppg
Pore pressure at surface casing shoe =	8.33 ppg
Pore pressure at prod casing shoe =	8.33 ppg
Gas gradient =	0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. **Cementing Design: GMBU D-2-9-17**

Job	Fill	Description	Sacks	OH Excess*	Weight (ppg)	Yield (ft <sup>3</sup> /sk)
			ft <sup>3</sup>			
Surface casing	300'	Class G w/ 2% CaCl	138	30%	15.8	1.17
			161			
Prod casing Lead	4,334'	Prem Lite II w/ 10% gel + 3% KCl	299	30%	11.0	3.26
			976			
Prod casing Tail	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363	30%	14.3	1.24
			451			

\*Actual volume pumped will be 15% over the caliper log

- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
- Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to  $\pm 300$  feet will be drilled with an air/mist system. The air rig is equipped with a 6 1/2" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about  $\pm 300$  feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 300' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**


No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the second quarter of 2011, and take approximately seven (7) days from spud to rig release.


# T9S, R17E, S.L.B.&M.

## NEWFIELD EXPLORATION COMPANY

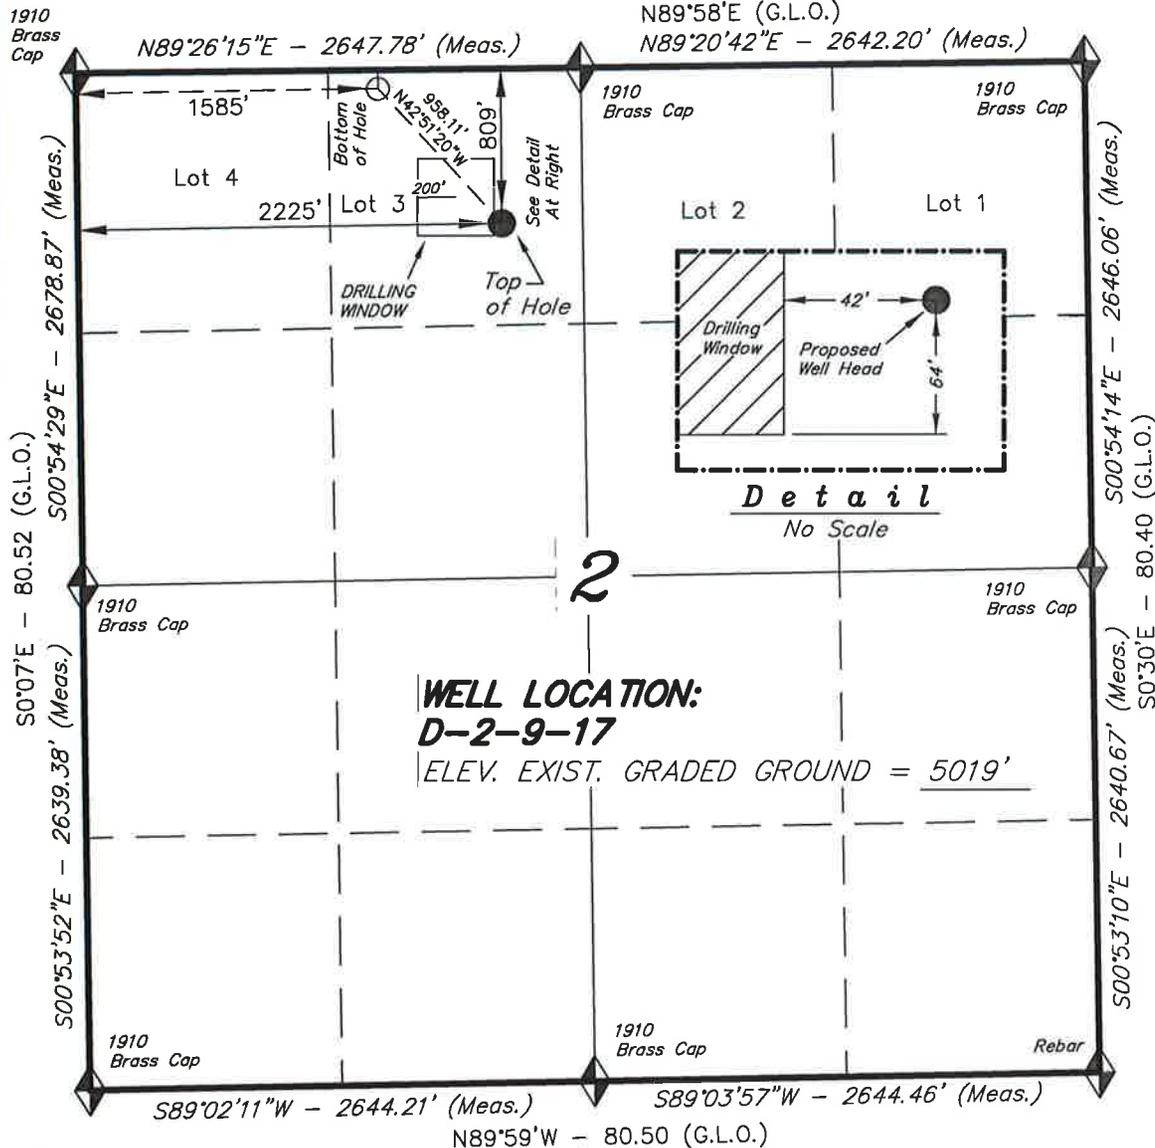

WELL LOCATION, D-2-9-17, LOCATED AS SHOWN IN THE NE 1/4 NW 1/4 (LOT 3) OF SECTION 2, T9S, R17E, S.L.B.&M. UTAH COUNTY, UTAH.

TARGET BOTTOM HOLE, D-2-9-17, LOCATED AS SHOWN IN THE NE 1/4 NW 1/4 (LOT 3) OF SECTION 2, T9S, R17E, S.L.B.&M. UTAH COUNTY, UTAH.



**NOTES:**

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.
3. The Bottom of Hole footages are 100' FNL & 1585' FWL.

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

REGISTERED LAND SURVEYOR  
STACY W. STEWART  
REGISTRATION No. 189377  
STATE OF UTAH  
03-19-11

◆ = SECTION CORNERS LOCATED


BASIS OF ELEV; Elevations are based on an N.G.S. OPUS Correction. LOCATION: LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'

**D-2-9-17**  
(Surface Location) NAD 83  
LATITUDE = 40° 03' 54.06"  
LONGITUDE = 109° 58' 31.15"

**TRI STATE LAND SURVEYING & CONSULTING**  
180 NORTH VERNAL AVE. - VERNAL, UTAH 84078  
(435) 781-2501

DATE SURVEYED: 03-07-11	SURVEYED BY: K.S.	VERSION:
DATE DRAWN: 03-18-11	DRAWN BY: F.T.M.	V1
REVISED:	SCALE: 1" = 1000'	

**Access Road Map**

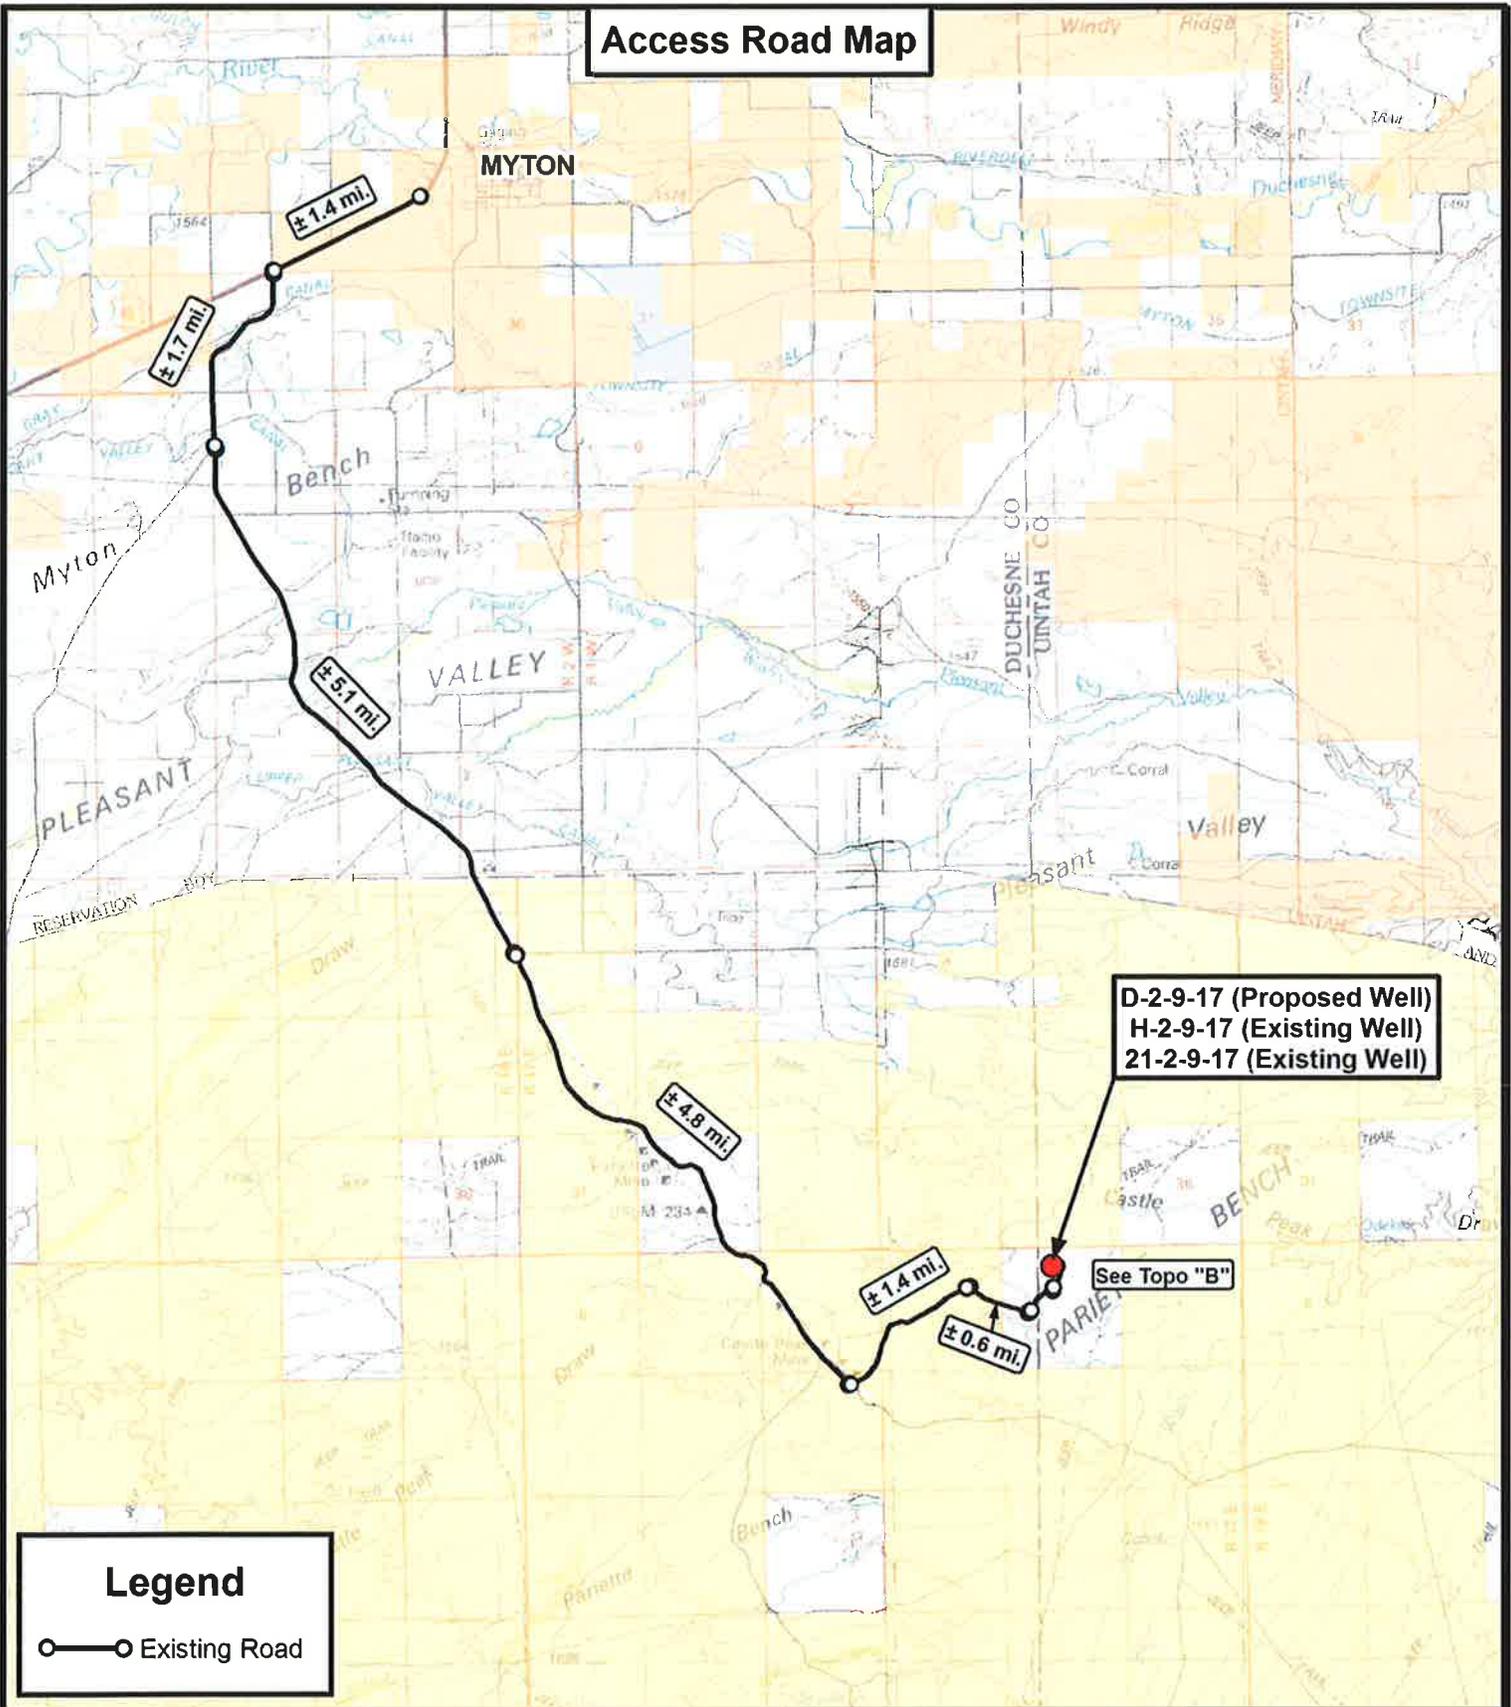

**D-2-9-17 (Proposed Well)**  
**H-2-9-17 (Existing Well)**  
**21-2-9-17 (Existing Well)**

See Topo "B"

**Legend**

○—○ Existing Road

**Tri State Land Surveying, Inc.**  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
 F: (435) 781-2518



**NEWFIELD EXPLORATION COMPANY**

D-2-9-17 (Proposed Well)  
 H-2-9-17 (Existing Well)  
 21-2-9-17 (Existing Well)


SEC. 2, T9S, R17E, S.L.B.&M. Uintah County, UT.

DRAWN BY:	J.A.S.	REVISED:		VERSION:	
DATE:	03-23-2011			V1	
SCALE:	1:100,000				

**TOPOGRAPHIC MAP**

SHEET **A**

**Access Road Map**

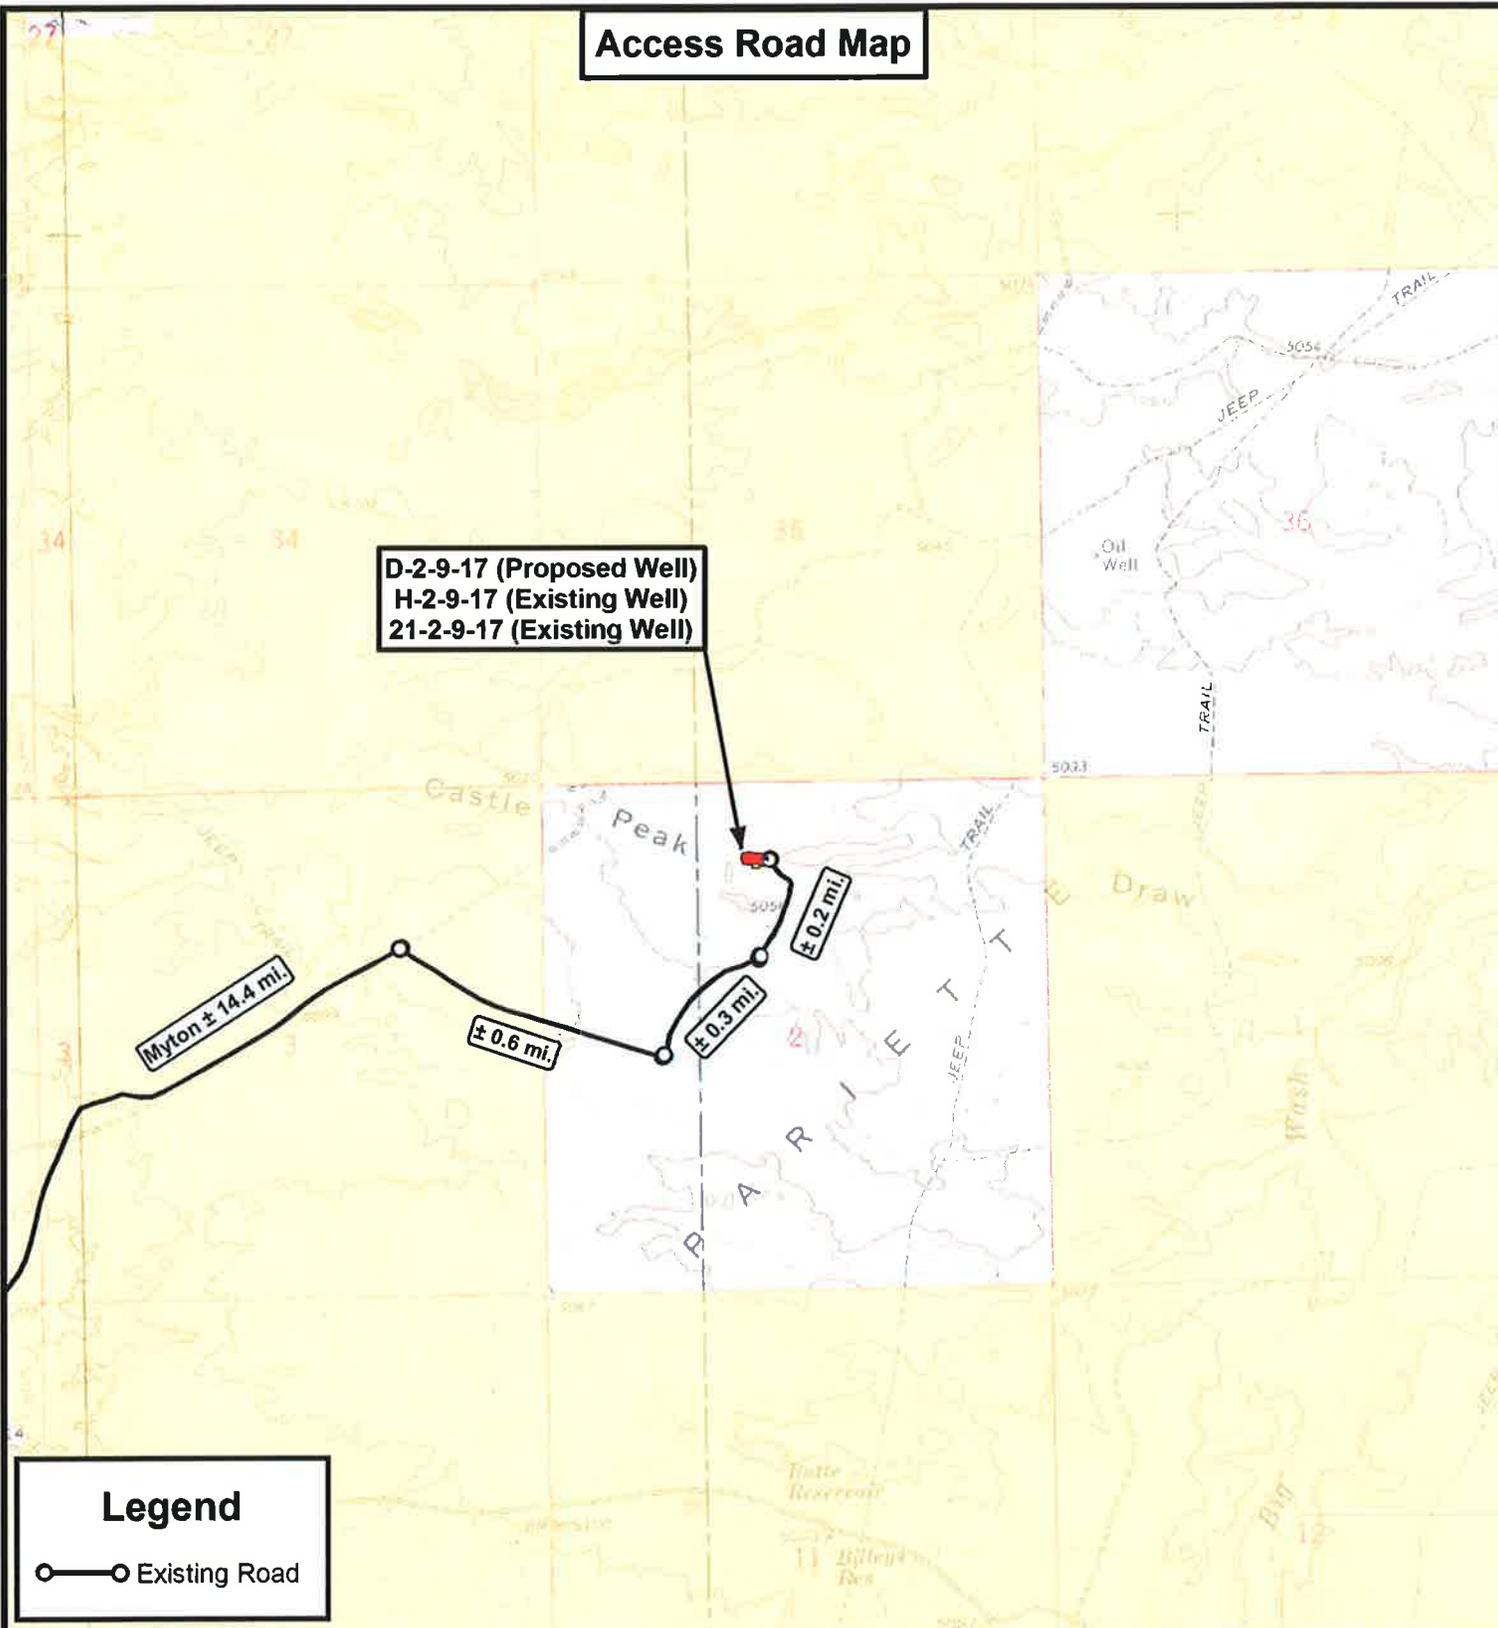

**D-2-9-17 (Proposed Well)  
H-2-9-17 (Existing Well)  
21-2-9-17 (Existing Well)**

Myton ± 14.4 mi.

± 0.6 mi.

± 0.3 mi.

± 0.2 mi.

**Legend**

○—○ Existing Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

**Tri State Land Surveying, Inc.**  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
F: (435) 781-2518



**NEWFIELD EXPLORATION COMPANY**


D-2-9-17 (Proposed Well)  
H-2-9-17 (Existing Well)  
21-2-9-17 (Existing Well)  
SEC. 2, T9S, R17E, S.L.B.&M. Uintah County, UT.

DRAWN BY:	J.A.S.	REVISED:	VERSION:
DATE:	03-23-2011		V1
SCALE:	1" = 2,000'		

**TOPOGRAPHIC MAP**

SHEET **B**

**Proposed Pipeline Map**

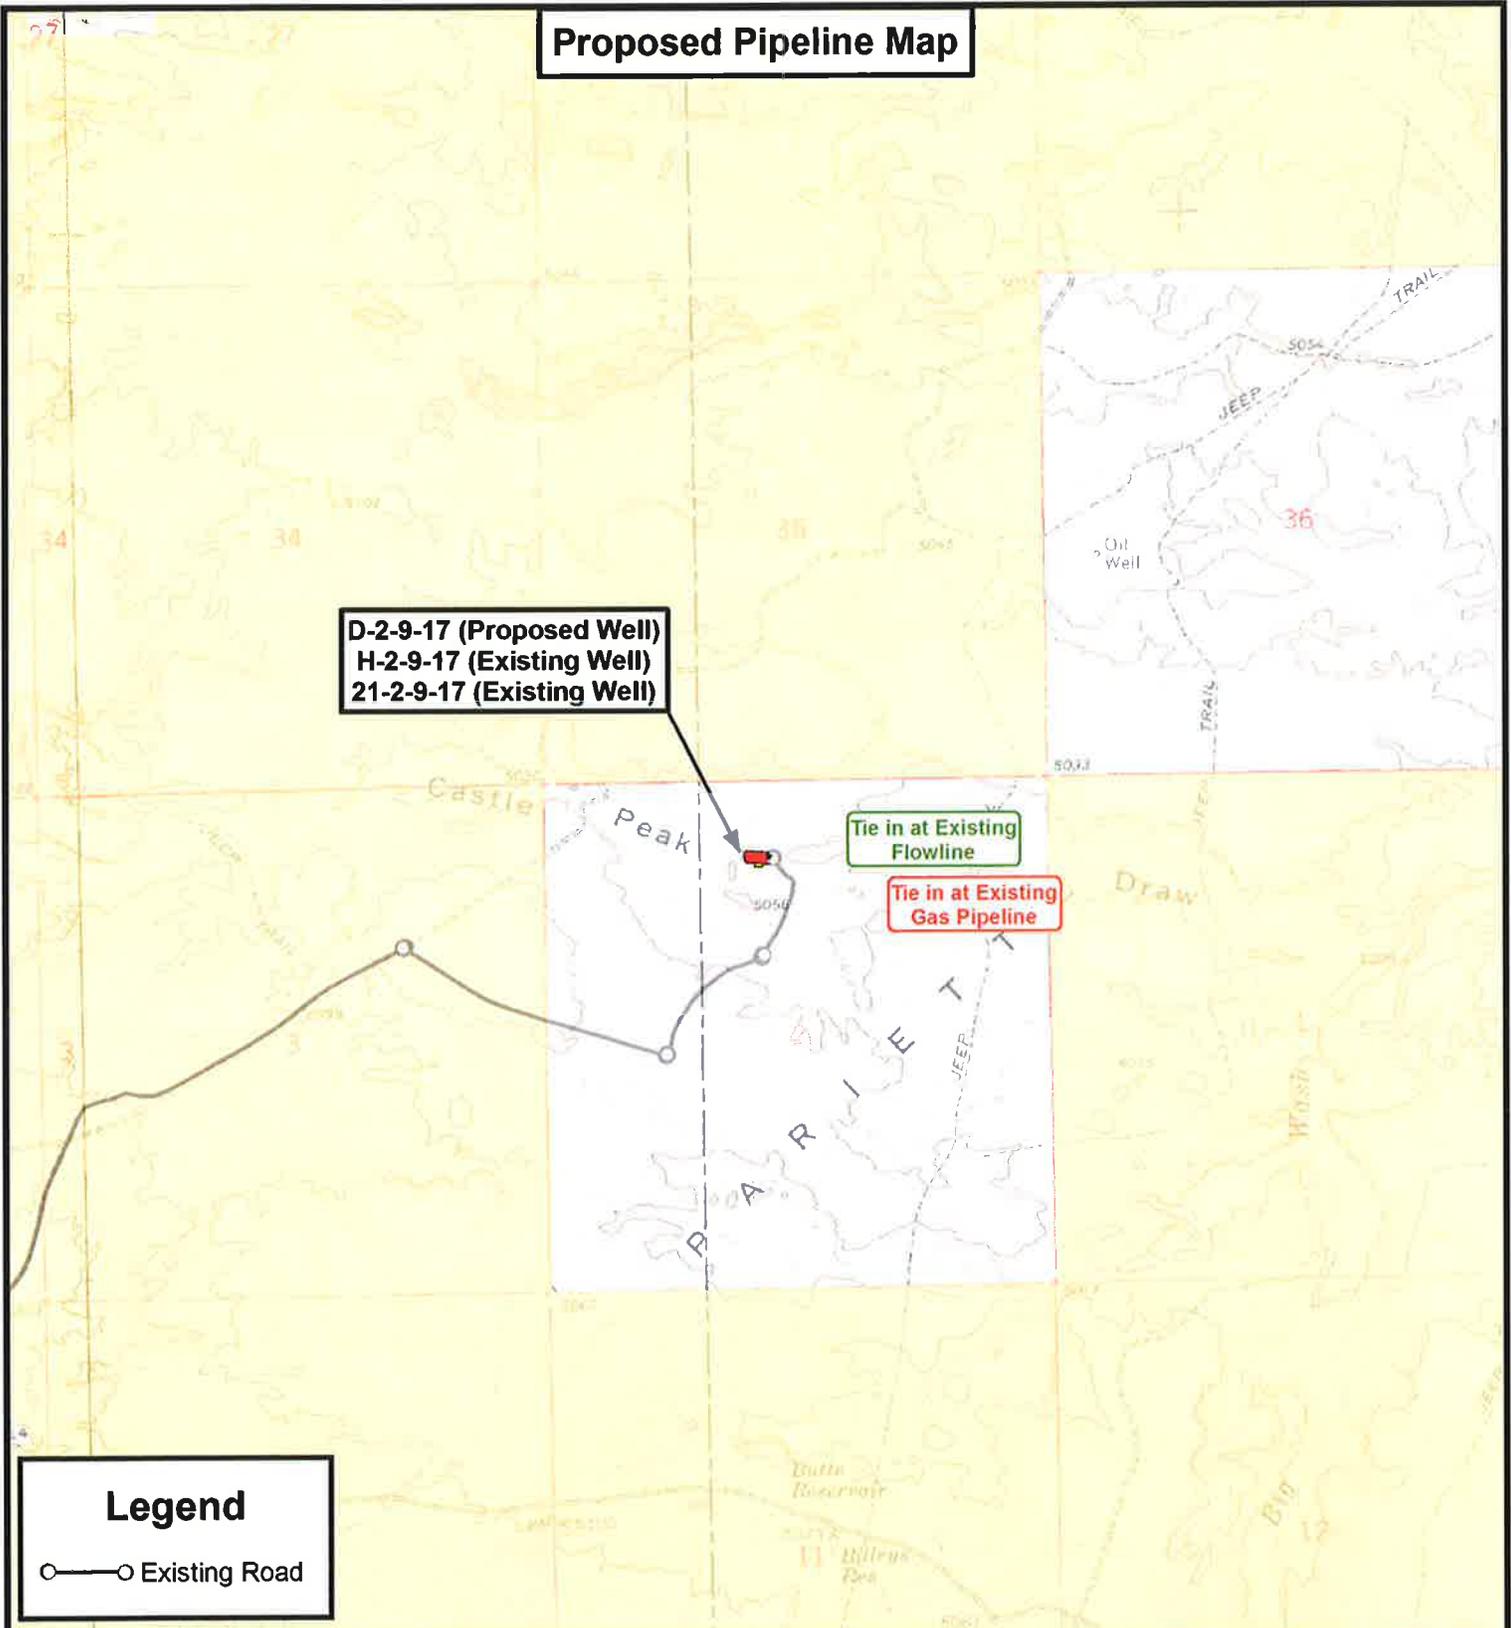

**D-2-9-17 (Proposed Well)**  
**H-2-9-17 (Existing Well)**  
**21-2-9-17 (Existing Well)**

Tie in at Existing Flowline

Tie in at Existing Gas Pipeline

**Legend**

○—○ Existing Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

**Tri State Land Surveying, Inc.**  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
 F: (435) 781-2518



**NEWFIELD EXPLORATION COMPANY**


D-2-9-17 (Proposed Well)  
 H-2-9-17 (Existing Well)  
 21-2-9-17 (Existing Well)

SEC. 2, T9S, R17E, S.L.B.&M. Uintah County, UT.

DRAWN BY:	J.A.S.	REVISED:	VERSION:
DATE:	03-23-2011		V1
SCALE:	1" = 2,000'		


**TOPOGRAPHIC MAP**

SHEET **C**

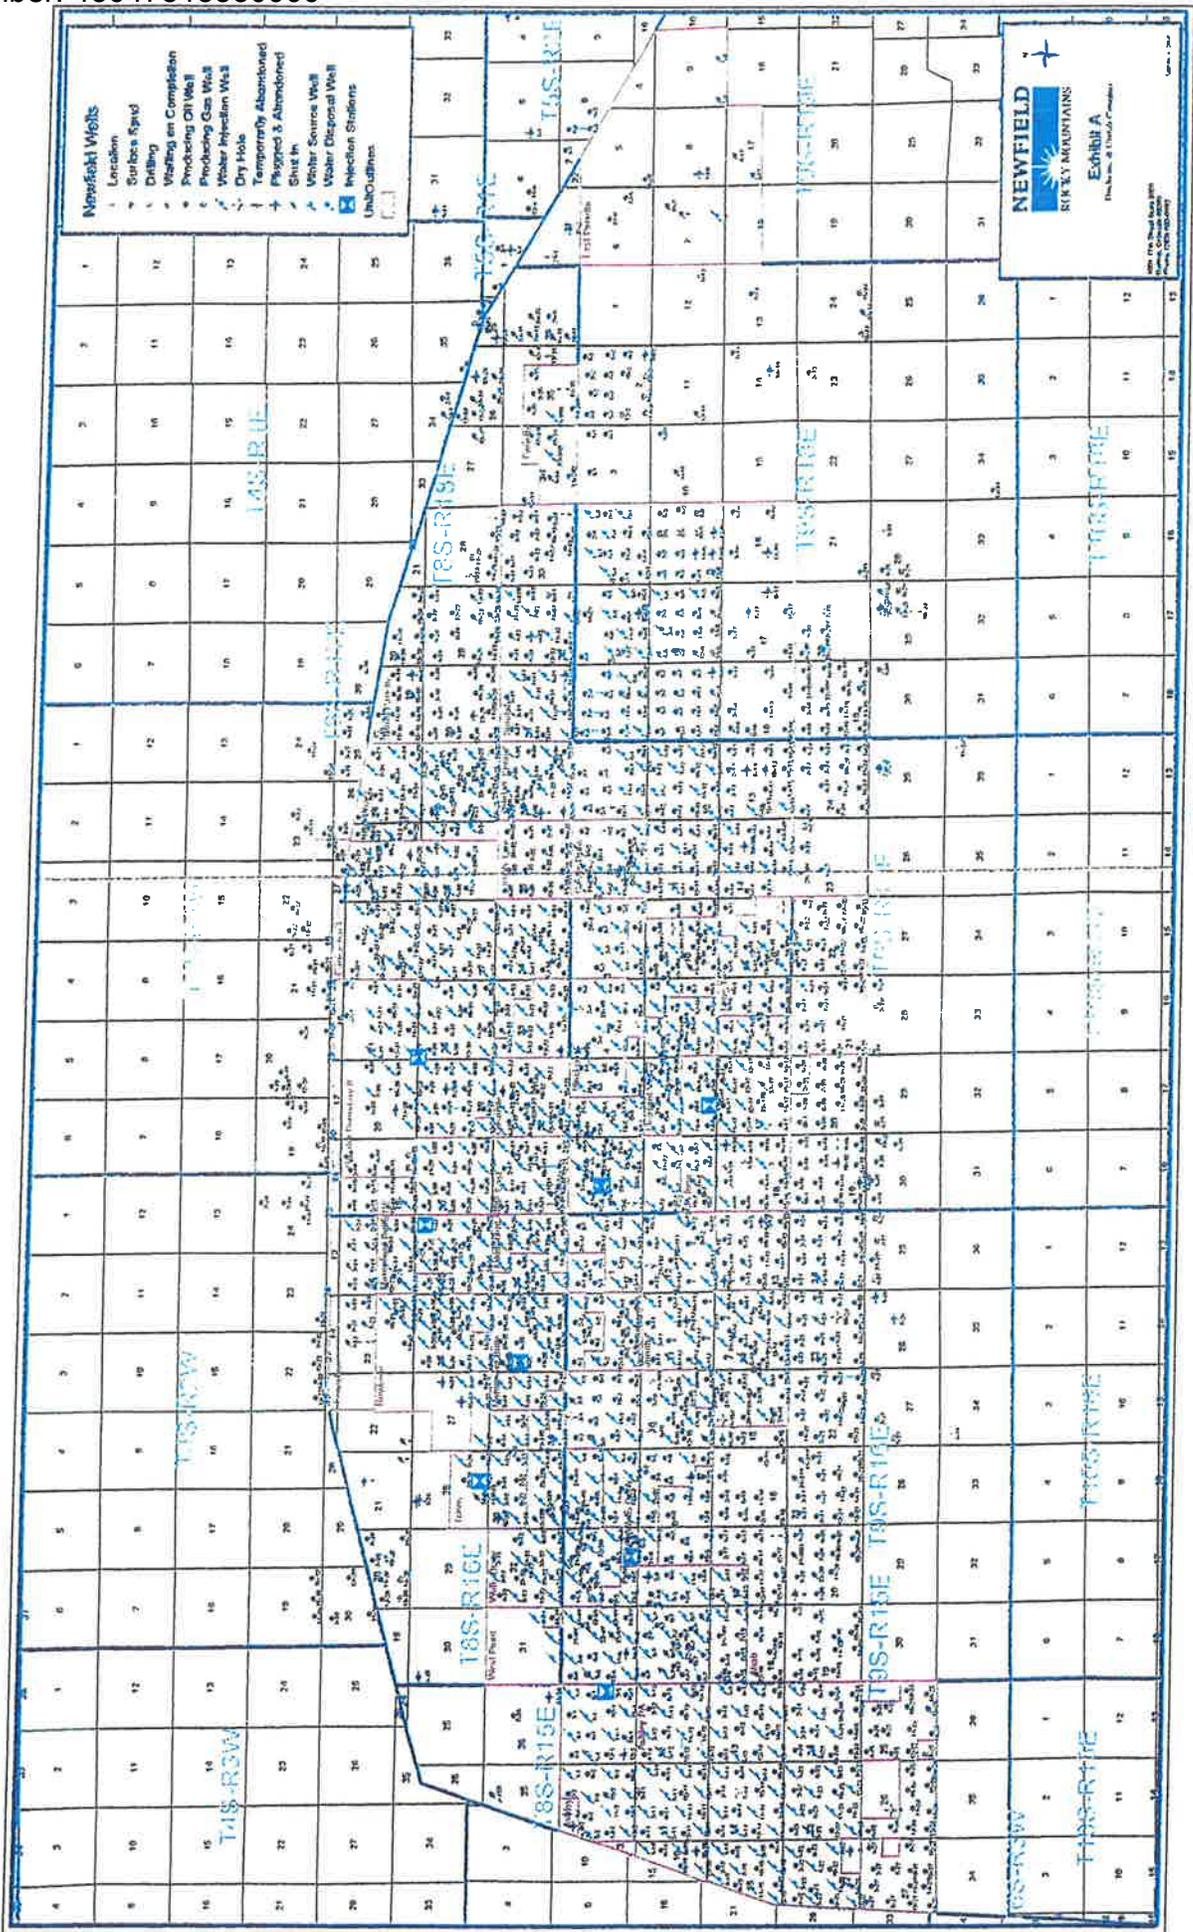

**Exhibit "B" Map**

D-2-9-17 (Proposed Well)  
 H-2-9-17 (Existing Well)  
 21-2-9-17 (Existing Well)

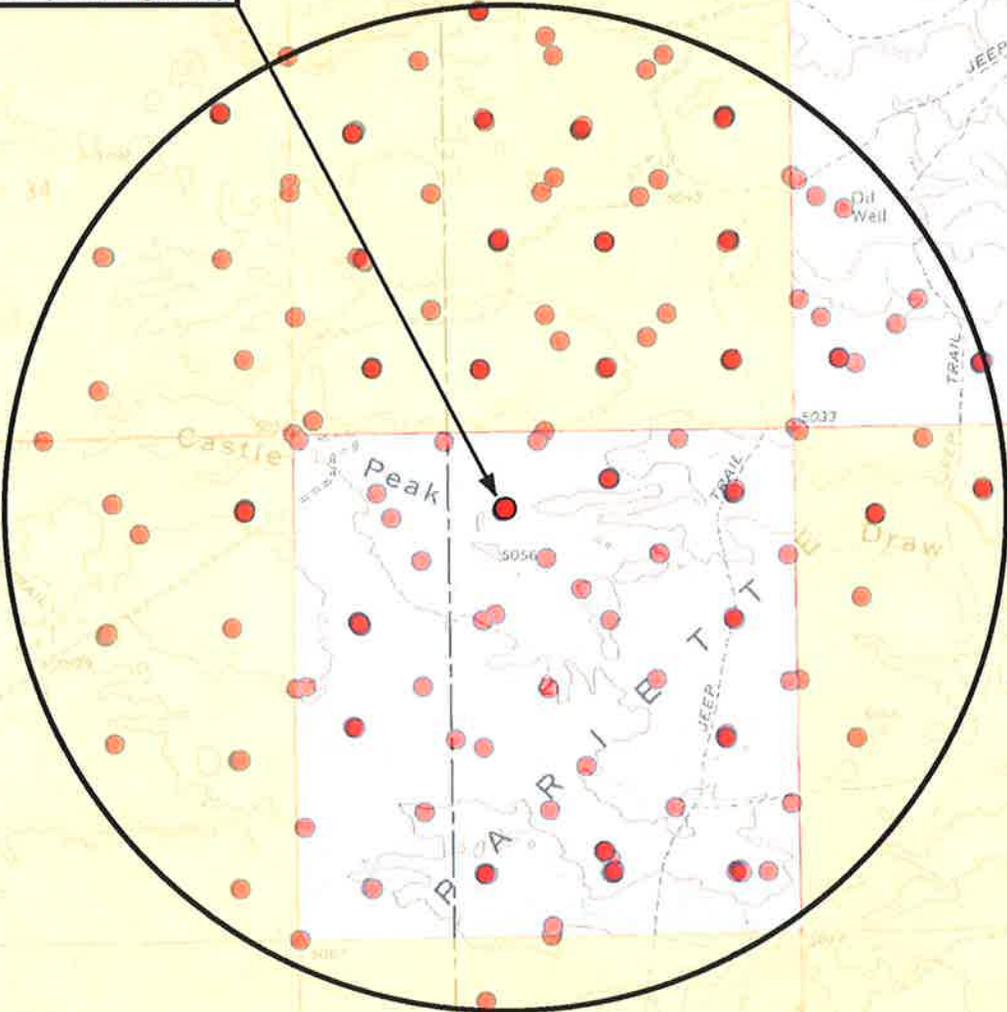

**Legend**

-  1 Mile Radius
-  Proposed Location



**Tri State**  
**Land Surveying, Inc.**  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
 F: (435) 781-2518

DRAWN BY:	J.A.S.	REVISED:	VERSION:
DATE:	03-23-2011		V1
SCALE:	1" = 2,010'		



**NEWFIELD EXPLORATION COMPANY**

D-2-9-17 (Proposed Well)  
 H-2-9-17 (Existing Well)  
 21-2-9-17 (Existing Well)  
 SEC. 2, T9S, R17E, S.L.B.&M. Uintah County, UT.

**TOPOGRAPHIC MAP**

SHEET **D**



# **NEWFIELD EXPLORATION**

**USGS Myton SW (UT)  
SECTION 2 T9S, R17E  
D-2-9-17**

**Wellbore #1**

**Plan: Design #1**

## **Standard Planning Report**

**03 July, 2011**





<b>Database:</b>	EDM 2003.21 Single User Db	<b>Local Co-ordinate Reference:</b>	Well D-2-9-17
<b>Company:</b>	NEWFIELD EXPLORATION	<b>TVD Reference:</b>	D-2-9-17 @ 5031.0ft (Newfield Rig)
<b>Project:</b>	USGS Myton SW (UT)	<b>MD Reference:</b>	D-2-9-17 @ 5031.0ft (Newfield Rig)
<b>Site:</b>	SECTION 2 T9S, R17E	<b>North Reference:</b>	True
<b>Well:</b>	D-2-9-17	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Design #1		

<b>Project</b>	USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA		
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	North American Datum 1983		
<b>Map Zone:</b>	Utah Central Zone		

<b>Site</b>	SECTION 2 T9S, R17E, SEC 2 T9S, R17E				
<b>Site Position:</b>		<b>Northing:</b>	7,194,800.00 ft	<b>Latitude:</b>	40° 3' 41.746 N
<b>From:</b>	Lat/Long	<b>Easting:</b>	2,067,293.09 ft	<b>Longitude:</b>	109° 58' 29.067 W
<b>Position Uncertainty:</b>	0.0 ft	<b>Slot Radius:</b>	"	<b>Grid Convergence:</b>	0.98 °

<b>Well</b>	D-2-9-17, SHL LAT: 40 03 54.06 LONG: -109 58 31.15					
<b>Well Position</b>	<b>+N/-S</b>	1,246.0 ft	<b>Northing:</b>	7,196,043.05 ft	<b>Latitude:</b>	40° 3' 54.060 N
	<b>+E/-W</b>	-161.9 ft	<b>Easting:</b>	2,067,109.95 ft	<b>Longitude:</b>	109° 58' 31.150 W
<b>Position Uncertainty</b>		0.0 ft	<b>Wellhead Elevation:</b>	5,031.0 ft	<b>Ground Level:</b>	5,019.0 ft

<b>Wellbore</b>	Wellbore #1				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF2010	2011/04/06	11.31	65.83	52,317

<b>Design</b>	Design #1			
<b>Audit Notes:</b>				
<b>Version:</b>	<b>Phase:</b>	PROTOTYPE	<b>Tie On Depth:</b>	0.0
<b>Vertical Section:</b>	<b>Depth From (TVD) (ft)</b>	<b>+N/-S (ft)</b>	<b>+E/-W (ft)</b>	<b>Direction (°)</b>
	0.0	0.0	0.0	317.14

<b>Plan Sections</b>										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,282.1	10.23	317.14	1,278.5	44.5	-41.3	1.50	1.50	0.00	317.14	
6,334.0	10.23	317.14	6,250.0	702.3	-651.7	0.00	0.00	0.00	0.00	D-2-9-17 TGT



<b>Database:</b>	EDM 2003.21 Single User Db	<b>Local Co-ordinate Reference:</b>	Well D-2-9-17
<b>Company:</b>	NEWFIELD EXPLORATION	<b>TVD Reference:</b>	D-2-9-17 @ 5031.0ft (Newfield Rig)
<b>Project:</b>	USGS Myton SW (UT)	<b>MD Reference:</b>	D-2-9-17 @ 5031.0ft (Newfield Rig)
<b>Site:</b>	SECTION 2 T9S, R17E	<b>North Reference:</b>	True
<b>Well:</b>	D-2-9-17	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	1.50	317.14	700.0	1.0	-0.9	1.3	1.50	1.50	0.00
800.0	3.00	317.14	799.9	3.8	-3.6	5.2	1.50	1.50	0.00
900.0	4.50	317.14	899.7	8.6	-8.0	11.8	1.50	1.50	0.00
1,000.0	6.00	317.14	999.3	15.3	-14.2	20.9	1.50	1.50	0.00
1,100.0	7.50	317.14	1,098.6	24.0	-22.2	32.7	1.50	1.50	0.00
1,200.0	9.00	317.14	1,197.5	34.5	-32.0	47.0	1.50	1.50	0.00
1,282.1	10.23	317.14	1,278.5	44.5	-41.3	60.7	1.50	1.50	0.00
1,300.0	10.23	317.14	1,296.1	46.9	-43.5	63.9	0.00	0.00	0.00
1,400.0	10.23	317.14	1,394.5	59.9	-55.6	81.7	0.00	0.00	0.00
1,500.0	10.23	317.14	1,492.9	72.9	-67.6	99.4	0.00	0.00	0.00
1,600.0	10.23	317.14	1,591.3	85.9	-79.7	117.2	0.00	0.00	0.00
1,700.0	10.23	317.14	1,689.7	98.9	-91.8	135.0	0.00	0.00	0.00
1,800.0	10.23	317.14	1,788.1	112.0	-103.9	152.7	0.00	0.00	0.00
1,900.0	10.23	317.14	1,886.6	125.0	-116.0	170.5	0.00	0.00	0.00
2,000.0	10.23	317.14	1,985.0	138.0	-128.1	188.3	0.00	0.00	0.00
2,100.0	10.23	317.14	2,083.4	151.0	-140.1	206.0	0.00	0.00	0.00
2,200.0	10.23	317.14	2,181.8	164.0	-152.2	223.8	0.00	0.00	0.00
2,300.0	10.23	317.14	2,280.2	177.1	-164.3	241.6	0.00	0.00	0.00
2,400.0	10.23	317.14	2,378.6	190.1	-176.4	259.3	0.00	0.00	0.00
2,500.0	10.23	317.14	2,477.0	203.1	-188.5	277.1	0.00	0.00	0.00
2,600.0	10.23	317.14	2,575.4	216.1	-200.6	294.8	0.00	0.00	0.00
2,700.0	10.23	317.14	2,673.8	229.1	-212.6	312.6	0.00	0.00	0.00
2,800.0	10.23	317.14	2,772.2	242.2	-224.7	330.4	0.00	0.00	0.00
2,900.0	10.23	317.14	2,870.7	255.2	-236.8	348.1	0.00	0.00	0.00
3,000.0	10.23	317.14	2,969.1	268.2	-248.9	365.9	0.00	0.00	0.00
3,100.0	10.23	317.14	3,067.5	281.2	-261.0	383.7	0.00	0.00	0.00
3,200.0	10.23	317.14	3,165.9	294.2	-273.0	401.4	0.00	0.00	0.00
3,300.0	10.23	317.14	3,264.3	307.3	-285.1	419.2	0.00	0.00	0.00
3,400.0	10.23	317.14	3,362.7	320.3	-297.2	436.9	0.00	0.00	0.00
3,500.0	10.23	317.14	3,461.1	333.3	-309.3	454.7	0.00	0.00	0.00
3,600.0	10.23	317.14	3,559.5	346.3	-321.4	472.5	0.00	0.00	0.00
3,700.0	10.23	317.14	3,657.9	359.4	-333.5	490.2	0.00	0.00	0.00
3,800.0	10.23	317.14	3,756.3	372.4	-345.5	508.0	0.00	0.00	0.00
3,900.0	10.23	317.14	3,854.7	385.4	-357.6	525.8	0.00	0.00	0.00
4,000.0	10.23	317.14	3,953.2	398.4	-369.7	543.5	0.00	0.00	0.00
4,100.0	10.23	317.14	4,051.6	411.4	-381.8	561.3	0.00	0.00	0.00
4,200.0	10.23	317.14	4,150.0	424.5	-393.9	579.1	0.00	0.00	0.00
4,300.0	10.23	317.14	4,248.4	437.5	-406.0	596.8	0.00	0.00	0.00
4,400.0	10.23	317.14	4,346.8	450.5	-418.0	614.6	0.00	0.00	0.00
4,500.0	10.23	317.14	4,445.2	463.5	-430.1	632.3	0.00	0.00	0.00
4,600.0	10.23	317.14	4,543.6	476.5	-442.2	650.1	0.00	0.00	0.00
4,700.0	10.23	317.14	4,642.0	489.6	-454.3	667.9	0.00	0.00	0.00
4,800.0	10.23	317.14	4,740.4	502.6	-466.4	685.6	0.00	0.00	0.00
4,900.0	10.23	317.14	4,838.8	515.6	-478.5	703.4	0.00	0.00	0.00
5,000.0	10.23	317.14	4,937.3	528.6	-490.5	721.2	0.00	0.00	0.00
5,100.0	10.23	317.14	5,035.7	541.6	-502.6	738.9	0.00	0.00	0.00
5,200.0	10.23	317.14	5,134.1	554.7	-514.7	756.7	0.00	0.00	0.00



<b>Database:</b>	EDM 2003.21 Single User Db	<b>Local Co-ordinate Reference:</b>	Well D-2-9-17
<b>Company:</b>	NEWFIELD EXPLORATION	<b>TVD Reference:</b>	D-2-9-17 @ 5031.0ft (Newfield Rig)
<b>Project:</b>	USGS Myton SW (UT)	<b>MD Reference:</b>	D-2-9-17 @ 5031.0ft (Newfield Rig)
<b>Site:</b>	SECTION 2 T9S, R17E	<b>North Reference:</b>	True
<b>Well:</b>	D-2-9-17	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,300.0	10.23	317.14	5,232.5	567.7	-526.8	774.4	0.00	0.00	0.00
5,400.0	10.23	317.14	5,330.9	580.7	-538.9	792.2	0.00	0.00	0.00
5,500.0	10.23	317.14	5,429.3	593.7	-551.0	810.0	0.00	0.00	0.00
5,600.0	10.23	317.14	5,527.7	606.7	-563.0	827.7	0.00	0.00	0.00
5,700.0	10.23	317.14	5,626.1	619.8	-575.1	845.5	0.00	0.00	0.00
5,800.0	10.23	317.14	5,724.5	632.8	-587.2	863.3	0.00	0.00	0.00
5,900.0	10.23	317.14	5,822.9	645.8	-599.3	881.0	0.00	0.00	0.00
6,000.0	10.23	317.14	5,921.4	658.8	-611.4	898.8	0.00	0.00	0.00
6,100.0	10.23	317.14	6,019.8	671.8	-623.4	916.6	0.00	0.00	0.00
6,200.0	10.23	317.14	6,118.2	684.9	-635.5	934.3	0.00	0.00	0.00
6,300.0	10.23	317.14	6,216.6	697.9	-647.6	952.1	0.00	0.00	0.00
6,334.0	10.23	317.14	6,250.0	702.3	-651.7	958.1	0.00	0.00	0.00





Project: USGS Myton SW (UT)  
 Site: SECTION 2 T9S, R17E  
 Well: D-2-9-17  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.30°

Magnetic Field  
 Strength: 52316.5snT  
 Dip Angle: 65.83°  
 Date: 2011/04/06  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

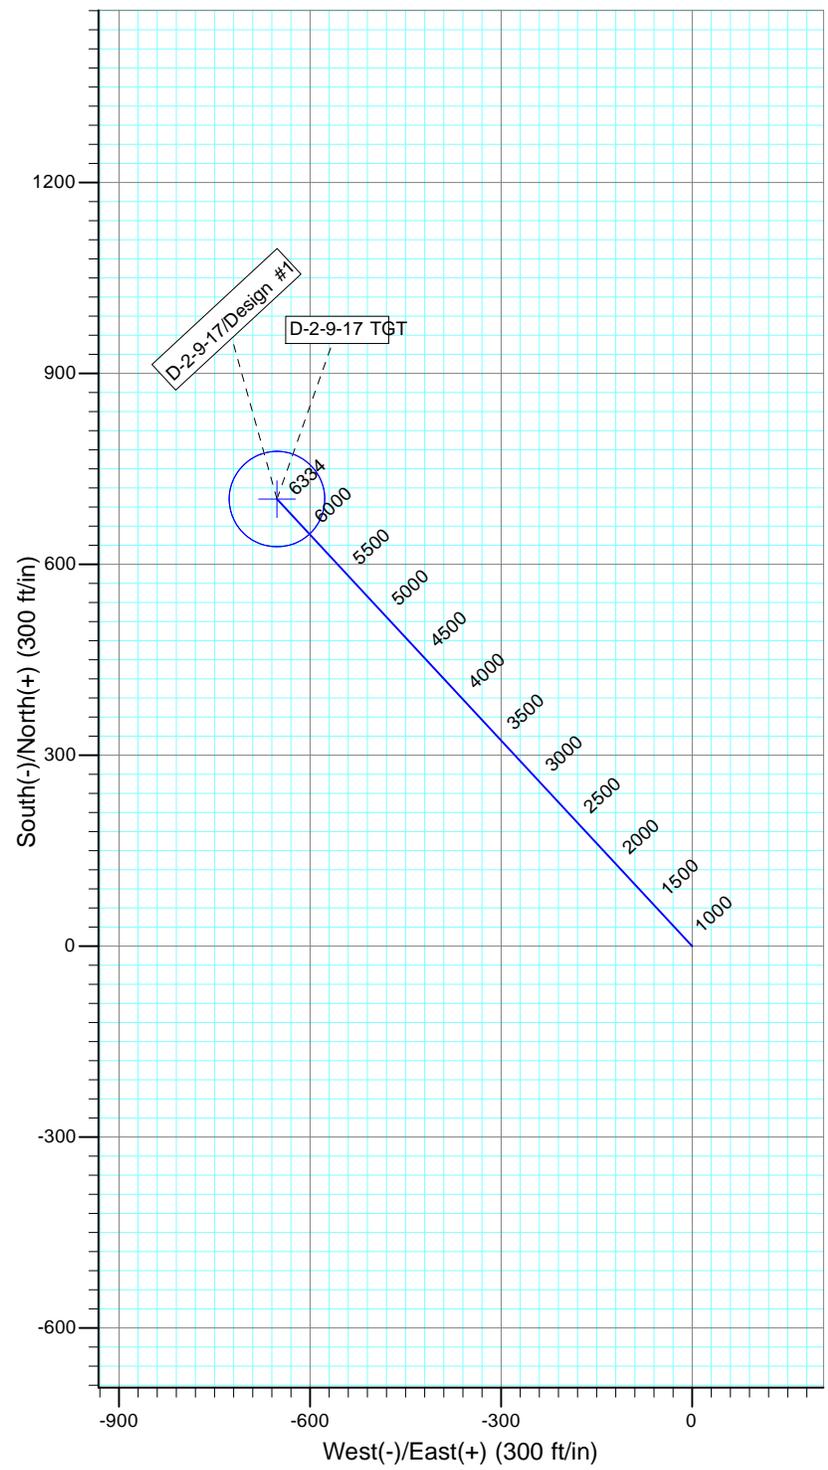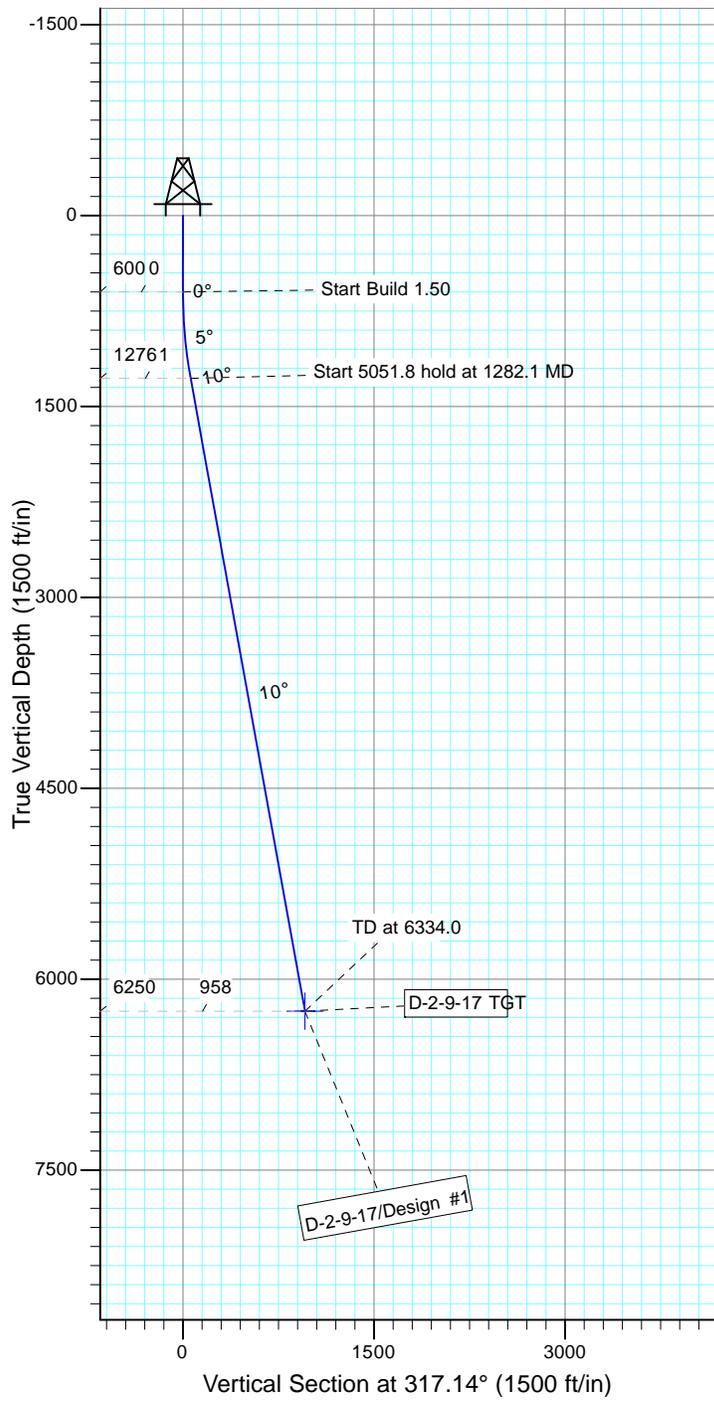

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
D-2-9-17 TGT	6250.0	702.3	-651.7	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1282.1	10.23	317.14	1278.5	44.5	-41.3	1.50	317.14	60.7	
4	6334.0	10.23	317.14	6250.0	702.3	-651.7	0.00	0.00	958.1	D-2-9-17 TGT



**NEWFIELD PRODUCTION COMPANY  
GMBU D-2-9-17  
AT SURFACE: NE/NW SECTION 2, T9S, R17E  
UINTAH COUNTY, UTAH**

**ONSHORE ORDER NO. 1**

**MULTI-POINT SURFACE USE & OPERATIONS PLAN**

**1. EXISTING ROADS**

See attached Topographic Map "A"

To reach Newfield Production Company well location site GMBU D-2-9-17 located in the NE 1/4 NW 1/4 Section 2, T9S, R17E, Uintah County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 - 1.4 miles  $\pm$  to the junction of this highway and UT State Hwy 53; proceed southeasterly - 11.6 miles  $\pm$  to it's junction with an existing road to the northeast; proceed northeasterly - 1.4 miles  $\pm$  to it's junction with an existing road to the southeast; proceed southeasterly - 0.6 miles  $\pm$  to it's junction with an existing road to the northeast; proceed northeasterly - 0.5 miles  $\pm$  to it's junction with the access road to the existing 21-2-9-17 well pad.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

**2. PLANNED ACCESS ROAD**

There is no proposed access road for this location. The proposed well will be drilled directionally off of the existing 21-2-9-17 well pad. See attached **Topographic Map "B"**.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

**3. LOCATION OF EXISTING WELLS**

Refer to Exhibit "B".

**4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District  
Water Right : 43-10136

Maurice Harvey Pond  
Water Right: 47-1358

Neil Moon Pond  
Water Right: 43-11787

Newfield Collector Well  
Water Right: 47-1817 (A30414DVA, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site.

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

8. ANCILLARY FACILITIES

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. WELL SITE LAYOUT

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. PLANS FOR RESTORATION OF SURFACE:

- a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

- b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. SURFACE OWNERSHIP – State of Utah.

11. OTHER ADDITIONAL INFORMATION:

- a) Newfield Production Company is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, Newfield is to immediately stop work that might further disturb such materials and contact the Authorized Officer.
- b) Newfield Production will control noxious weeds along rights-of-way for roads, pipelines, well sites or other applicable facilities. On State administered land it is required that a Pesticide Use Proposal shall be submitted and given approval prior to the application of herbicides or other possible hazardous chemicals.
- c) Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on State Lands after the conclusion of drilling operations or at any other time without State authorization. However, if State authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

**Water Disposal**

After first production, if the production water meets quality guidelines, it will be transported to the Ashley, Monument Butte, Jonah, South Wells Draw and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project. Water not meeting quality criteria, will be disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), Federally approved surface disposal facilities or at a State of Utah approved surface disposal facilities.

**Additional Surface Stipulations**

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

**Hazardous Material Declaration**

Newfield Production Company guarantees that during the drilling and completion of the GMBU D-2-9-17, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the GMBU D-2-9-17, Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

Representative

Name: Tim Eaton  
Address: Newfield Production Company  
Route 3, Box 3630  
Myton, UT 84052  
Telephone: (435) 646-3721

Certification

Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #D-2-9-17, Section 2, Township 9S, Range 17E: Lease ML-45555 Uintah County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, Federal Bond #B001834.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

4/7/11  
Date

  
Mandie Crozier  
Regulatory Specialist  
Newfield Production Company

# 2-M SYSTEM

Blowout Prevention Equipment Systems

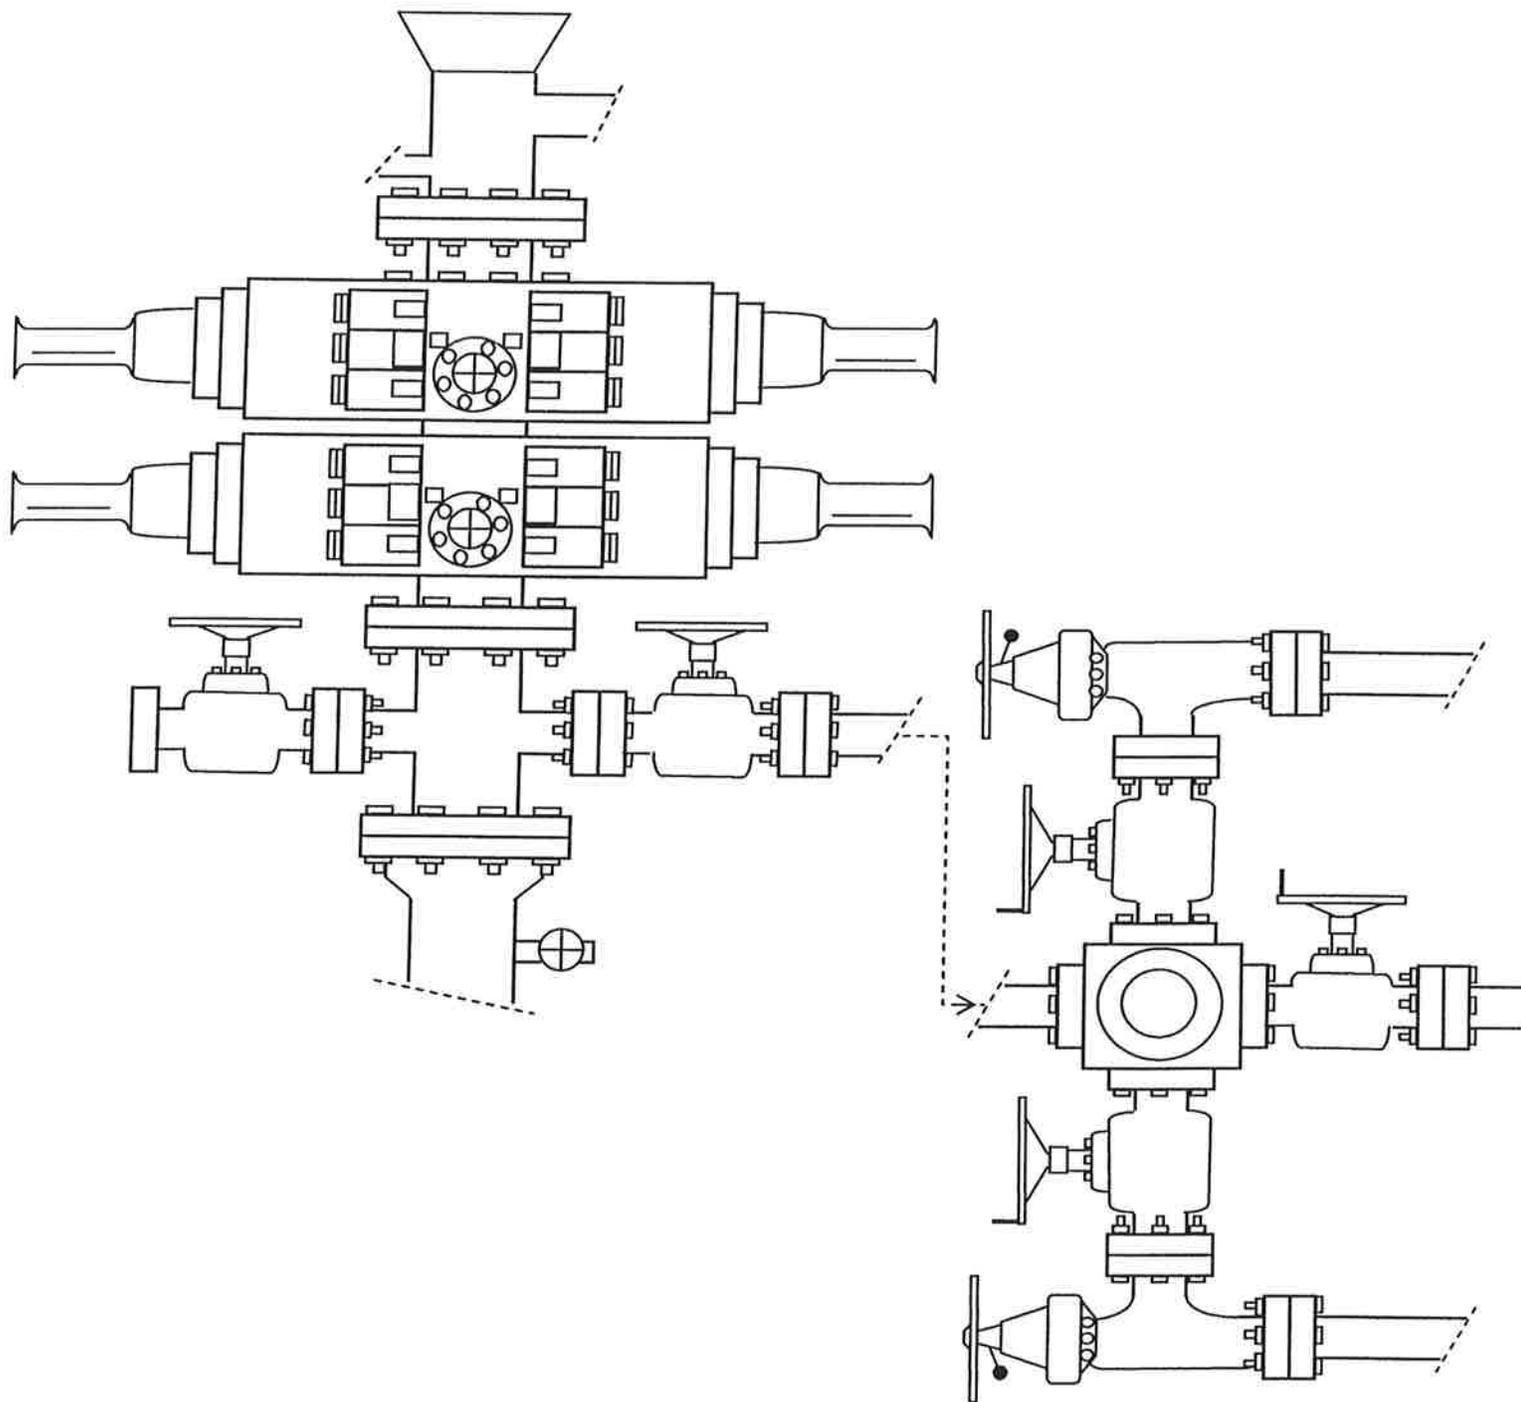


EXHIBIT C

# NEWFIELD EXPLORATION COMPANY

## WELL PAD INTERFERENCE PLAT

- D-2-9-17 (Proposed Well)
- H-2-9-17 (Existing Well)
- 21-2-9-17 (Existing Well)

Pad Location: NENW (LOT 3) Section 2, T9S, R17E, S.L.B.&M.




### TOP HOLE FOOTAGES

D-2-9-17 (PROPOSED)  
809' FNL & 2225' FWL

### BOTTOM HOLE FOOTAGES

D-2-9-17 (PROPOSED)  
100' FNL & 1585' FWL

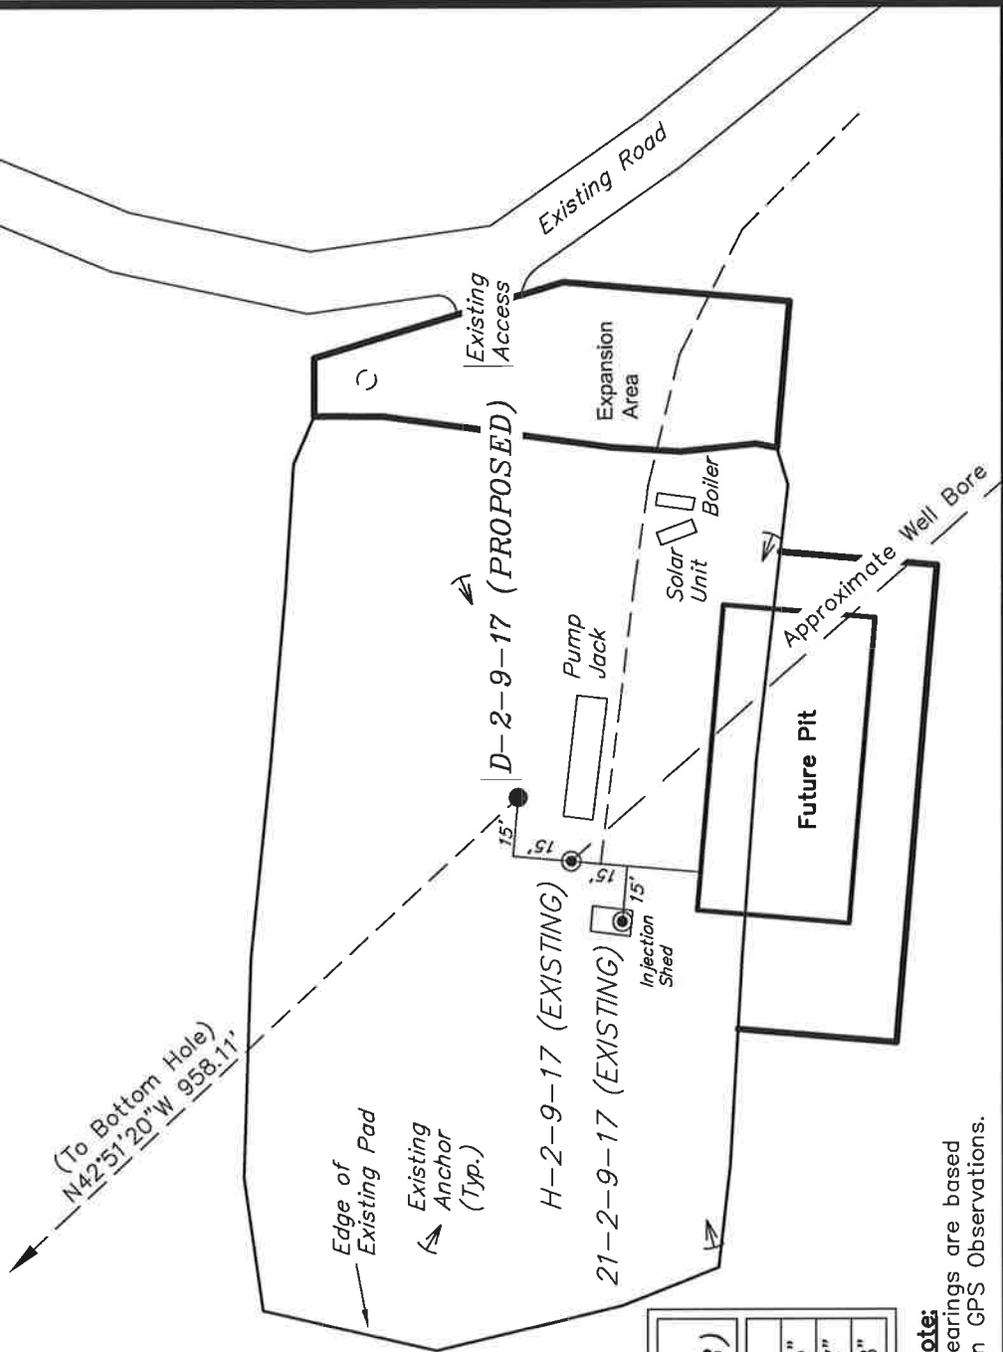

LATITUDE & LONGITUDE Surface position of Wells (NAD 83)		
WELL	LATITUDE	LONGITUDE
D-2-9-17	40° 03' 54.06"	109° 58' 31.15"
H-2-9-17	40° 03' 53.92"	109° 58' 31.37"
21-2-9-17	40° 03' 53.79"	109° 58' 31.58"

RELATIVE COORDINATES From Top Hole to C.O.P.		
WELL	NORTH	EAST
D-2-9-17	702'	-652'

**Note:**  
Bearings are based on GPS Observations.

SURVEYED BY: K.S.		DATE SURVEYED: 03-07-11	VERSION: V1
DRAWN BY: F.T.M.		DATE DRAWN: 03-18-11	
SCALE: 1" = 50'		REVISED:	



**Tri State Land Surveying, Inc.**  
(435) 781-2501  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

# NEWFIELD EXPLORATION COMPANY

## LOCATION LAYOUT

- D-2-9-17 (Proposed Well)
- H-2-9-17 (Existing Well)
- 21-2-9-17 (Existing Well)

Pad Location: NENW (LOT 3) Section 2, T9S, R17E, S.L.B.&M.

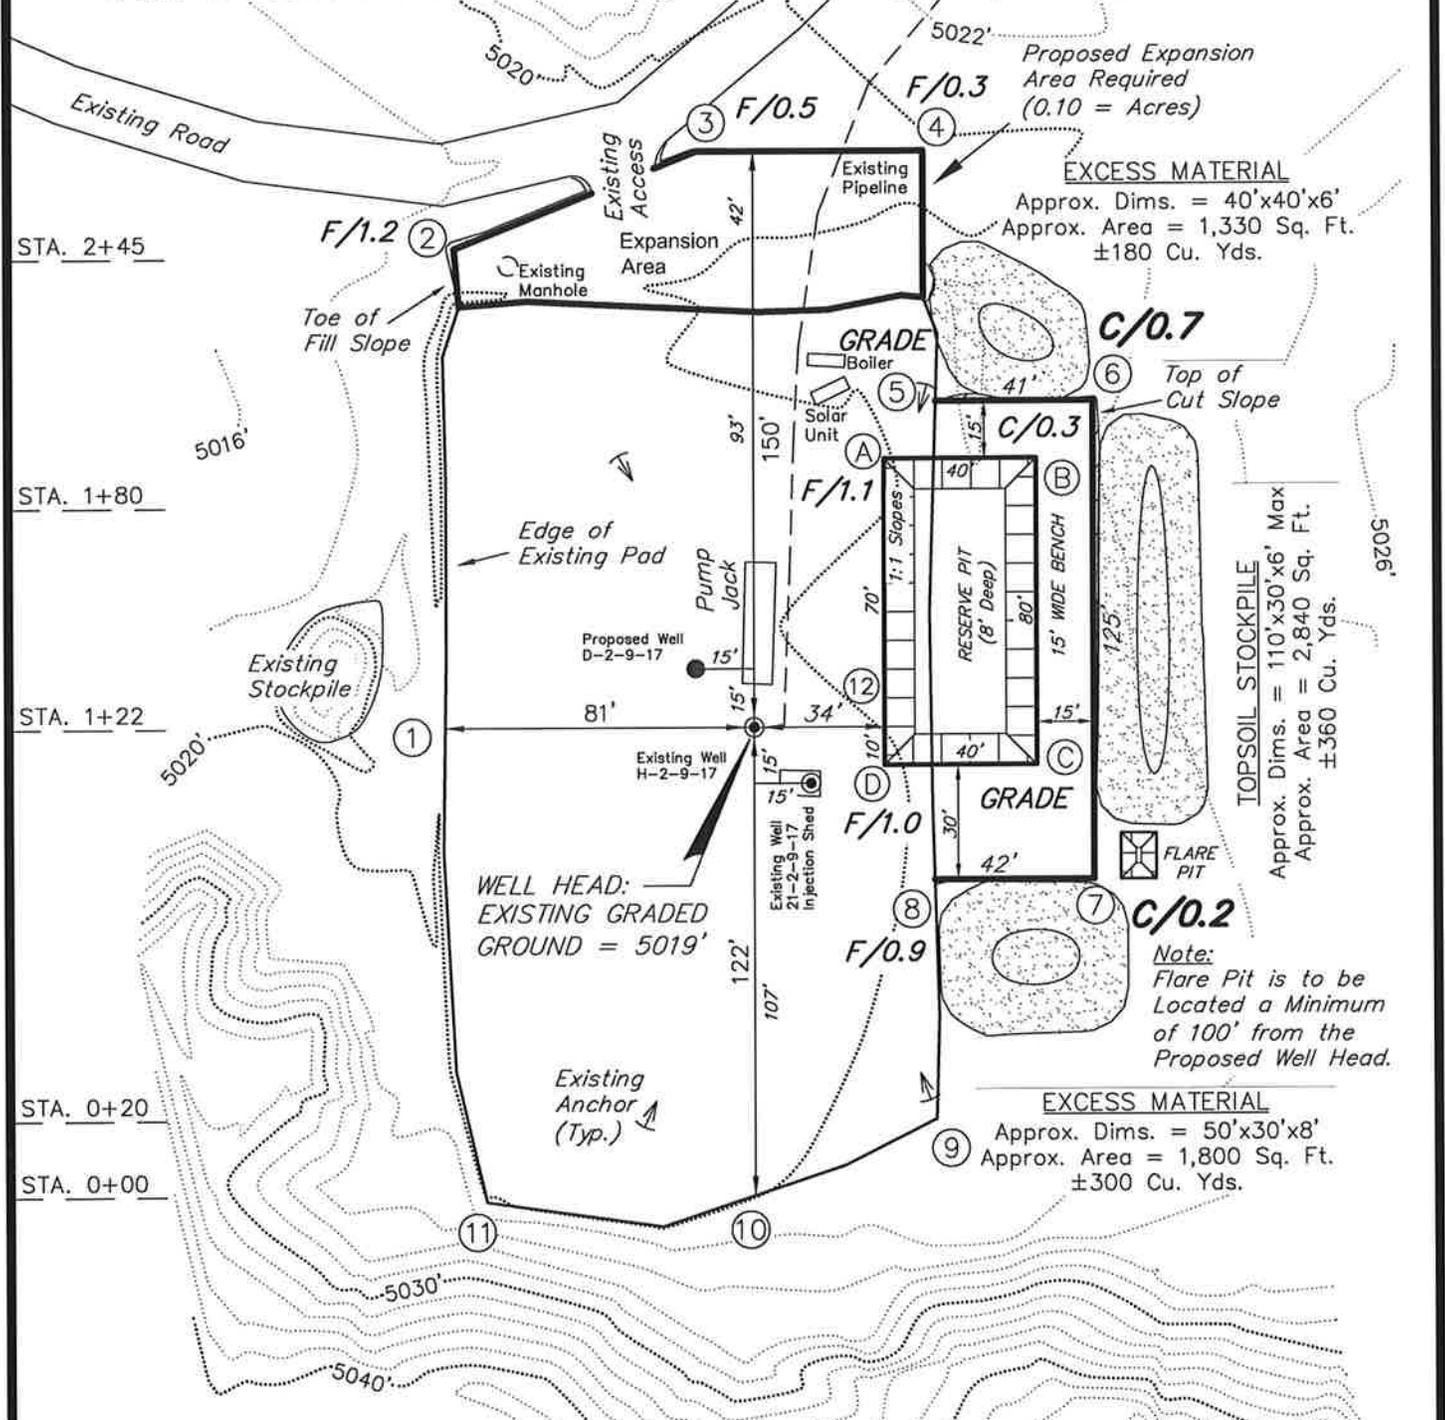

**NOTE:**  
The topsoil, excess material & temporary cuttings areas are calculated as being mounds containing 840 cubic yards of dirt (a 10% fluff factor is included). The mound areas are calculated with push slopes of 1.5:1 & fall slopes of 1.5:1.

**Note:**  
Topsoil to be Stripped From All New Construction Areas and Proposed Stock Pile Locations

SURVEYED BY: K.S.	DATE SURVEYED: 03-07-11	VERSION:
DRAWN BY: F.T.M.	DATE DRAWN: 03-21-11	V1
SCALE: 1" = 50'	REVISED:	

**Tri State** (435) 781-2501  
**Land Surveying, Inc.**  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

# NEWFIELD EXPLORATION COMPANY





## CROSS SECTIONS

*D-2-9-17 (Proposed Well)*

*H-2-9-17 (Existing Well)*

*21-2-9-17 (Existing Well)*

*Pad Location: NENW (LOT 3) Section 2, T9S, R17E, S.L.B.&M.*

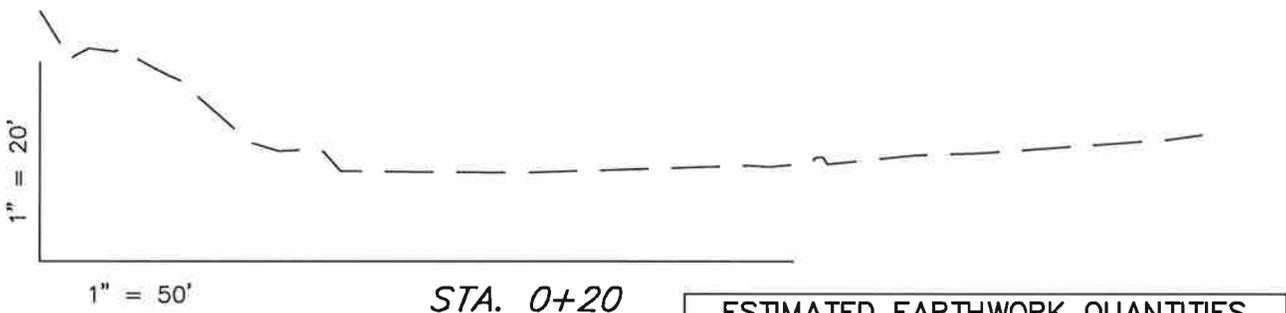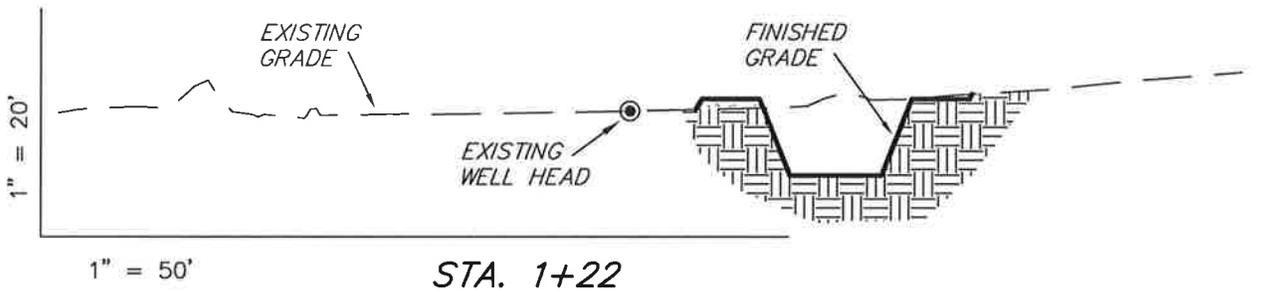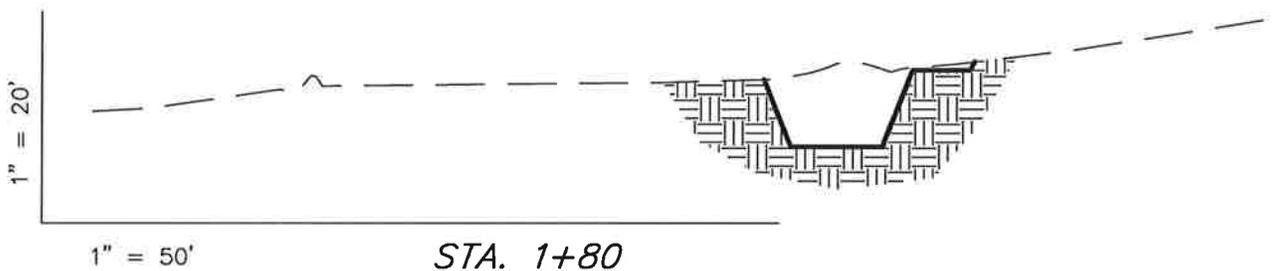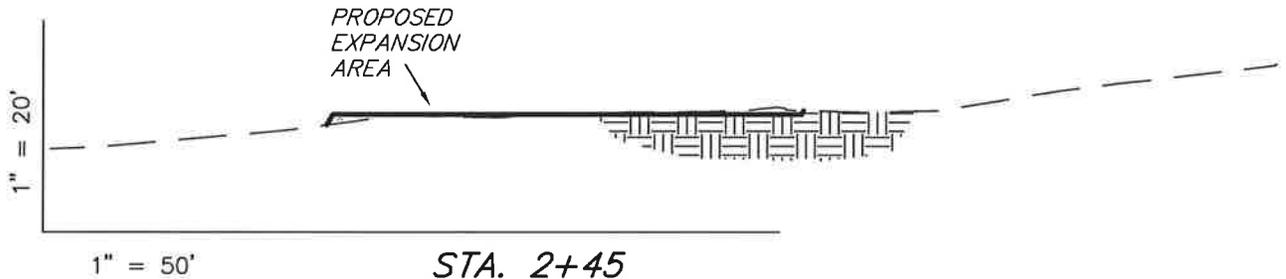

NOTE:  
UNLESS OTHERWISE  
NOTED ALL CUT/FILL  
SLOPES ARE AT 1.5:1

**ESTIMATED EARTHWORK QUANTITIES**  
(No Shrink or swell adjustments have been used)  
(Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	0	130	Topsoil is not included in Pad Cut	-131
PIT	570	0		570
<b>TOTALS</b>	<b>570</b>	<b>130</b>	<b>320</b>	<b>440</b>

SURVEYED BY: K.S.	DATE SURVEYED: 03-07-11	VERSION: V1
DRAWN BY: F.T.M.	DATE DRAWN: 03-21-11	
SCALE: 1" = 50'	REVISED:	

*Tri State* (435) 781-2501  
*Land Surveying, Inc.*  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078





VIA ELECTRONIC DELIVERY

April 11, 2011

State of Utah, Division of Oil, Gas and Mining  
ATTN: Diana Mason  
P.O. Box 145801  
Salt Lake City, UT 84114-5801

RE: Directional Drilling  
**GMBU D-2-9-17**  
Greater Monument Butte (Green River) Unit

Surface Hole: T9S-R17E Section 2: NENW (ML-45555)  
809' FNL 2225' FWL

At Target: T9S-R17E Section 2: NENW (ML-45555)  
100' FNL 1585' FWL

Uintah County, Utah

Dear Ms. Mason:

Pursuant to the filing by Newfield Production Company (NPC) of an Application for Permit to Drill the above referenced well dated 4/7/11, a copy of which is attached, and in accordance with Oil and Gas Conservation Rule R649-3-11, NPC hereby submits this letter as notice of our intention to directionally drill this well.

The surface hole and target locations of this well are both within the boundaries of the Greater Monument Butte Unit (UTU-87538X), of which Newfield certifies that it is the operator. Further, Newfield certifies that all lands within 460 feet of the entire directional well bore are within the Greater Monument Butte Unit.

NPC is permitting this well as a directional well in order to mitigate surface disturbance by utilizing pre-existing roads and pipelines.

NPC hereby requests our application for permit to drill be granted pursuant to R649-3-11. If you have any questions or require further information, please contact the undersigned at 303-383-4197 or by email at [sgillespie@newfield.com](mailto:sgillespie@newfield.com). Your consideration in this matter is greatly appreciated.

Sincerely,  
Newfield Production Company

A handwritten signature in blue ink, appearing to read "Shane Gillespie", is written over a faint, larger version of the same signature.

Shane Gillespie  
Land Associate

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT   
(highlight changes)

<b>APPLICATION FOR PERMIT TO DRILL</b>		5. MINERAL LEASE NO ML-45555	6. SURFACE State
1A. TYPE OF WORK DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>		7. IF INDIAN, ALLOTTEE OR TRIBE NAME NA	
1B. TYPE OF WELL OIL <input checked="" type="checkbox"/> GAS <input type="checkbox"/> OTHER _____ SINGLE ZONE <input checked="" type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>		8. UNIT or CA AGREEMENT NAME Greater Monument Butte	
2. NAME OF OPERATOR Newfield Production Company		9. WELL NAME and NUMBER: GMBU D-2-9-17	
3. ADDRESS OF OPERATOR: Route #3, Box 3630 Myton UT ZIP 84052		PHONE NUMBER: (435) 646-3721	10. FIELD AND POOL, OR WILDCAT Monument Butte
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: NE/NW 809' FNL 2225' FWL Sec. 2 T9S R17E AT PROPOSED PRODUCING ZONE: NE/NW 100' FNL 1585' FWL Sec. 2 T9S R17E		11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NENW 2 9S 17E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE Approximately 15.5 miles southeast of Myton, Utah		12. COUNTY Uintah	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) Approx. 100' f/lse line, NA' f/unit line	16. NUMBER OF ACRES IN LEASE 640.20 acres	17. NUMBER OF ACRES ASSIGNED TO THIS WELL 20 acres	
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) Approx. 990'	19. PROPOSED DEPTH: 6,405	20. BOND DESCRIPTION: #B001834	
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC): 5019' GL	22. APPROXIMATE DATE WORK WILL START <i>2nd Qtr. 2011</i>	23. ESTIMATED DURATION: (15) days from SPUD to rig release	

**PROPOSED CASING AND CEMENTING PROGRAM**

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT	SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT		
12 1/4"	8 5/8 J-55 24.0	300	Class G w/2% CaCl	155 sx +/-	1.17 15.8
7 7/8"	5 1/2 J-55 15.5	6,405	Lead(Prem Lite II)	275 sx +/-	3.26 11.0
			Tail (50/50 Poz)	450 sx +/-	1.24 14.3

**ATTACHMENTS**

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES

- |  |  |
|--|--|
| <input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER     | <input checked="" type="checkbox"/> COMPLETE DRILLING PLAN                                   |
| <input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER | <input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER |

NAME (PLEASE PRINT) Mandje Crozier TITLE Regulatory Specialist  
SIGNATURE *Mandje Crozier* DATE 4/7/11

(This space for State use only)

API NUMBER ASSIGNED: \_\_\_\_\_


APPROVAL \_\_\_\_\_

# T9S, R17E, S.L.B.&M.

# NEWFIELD EXPLORATION COMPANY

WELL LOCATION, D-2-9-17, LOCATED AS SHOWN IN THE NE 1/4 NW 1/4 (LOT 3) OF SECTION 2, T9S, R17E, S.L.B.&M. UINTAH COUNTY, UTAH.

TARGET BOTTOM HOLE, D-2-9-17, LOCATED AS SHOWN IN THE NE 1/4 NW 1/4 (LOT 3) OF SECTION 2, T9S, R17E, S.L.B.&M. UINTAH COUNTY, UTAH.




- NOTES:**
1. Well footages are measured at right angles to the Section Lines.
  2. Bearings are based on Global Positioning Satellite observations.
  3. The Bottom of Hole footages are 100' FNL & 1585' FWL.

THIS IS TO CERTIFY THAT THE ABOVE REPORT WAS PREPARED FROM FIELD NOTES OF ACCURATE SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

STACY W. STEWART  
REGISTERED LAND SURVEYOR  
REGISTRATION NO. 68827  
STATE OF UTAH 03-18-11

**TRI STATE LAND SURVEYING & CONSULTING**  
180 NORTH VERNAL AVE. - VERNAL, UTAH 84078  
(435) 781-2501

DATE SURVEYED: 03-07-11	SURVEYED BY: K.S.	VERSION:
DATE DRAWN: 03-18-11	DRAWN BY: F.T.M.	V1
REVISED:	SCALE: 1" = 1000'	

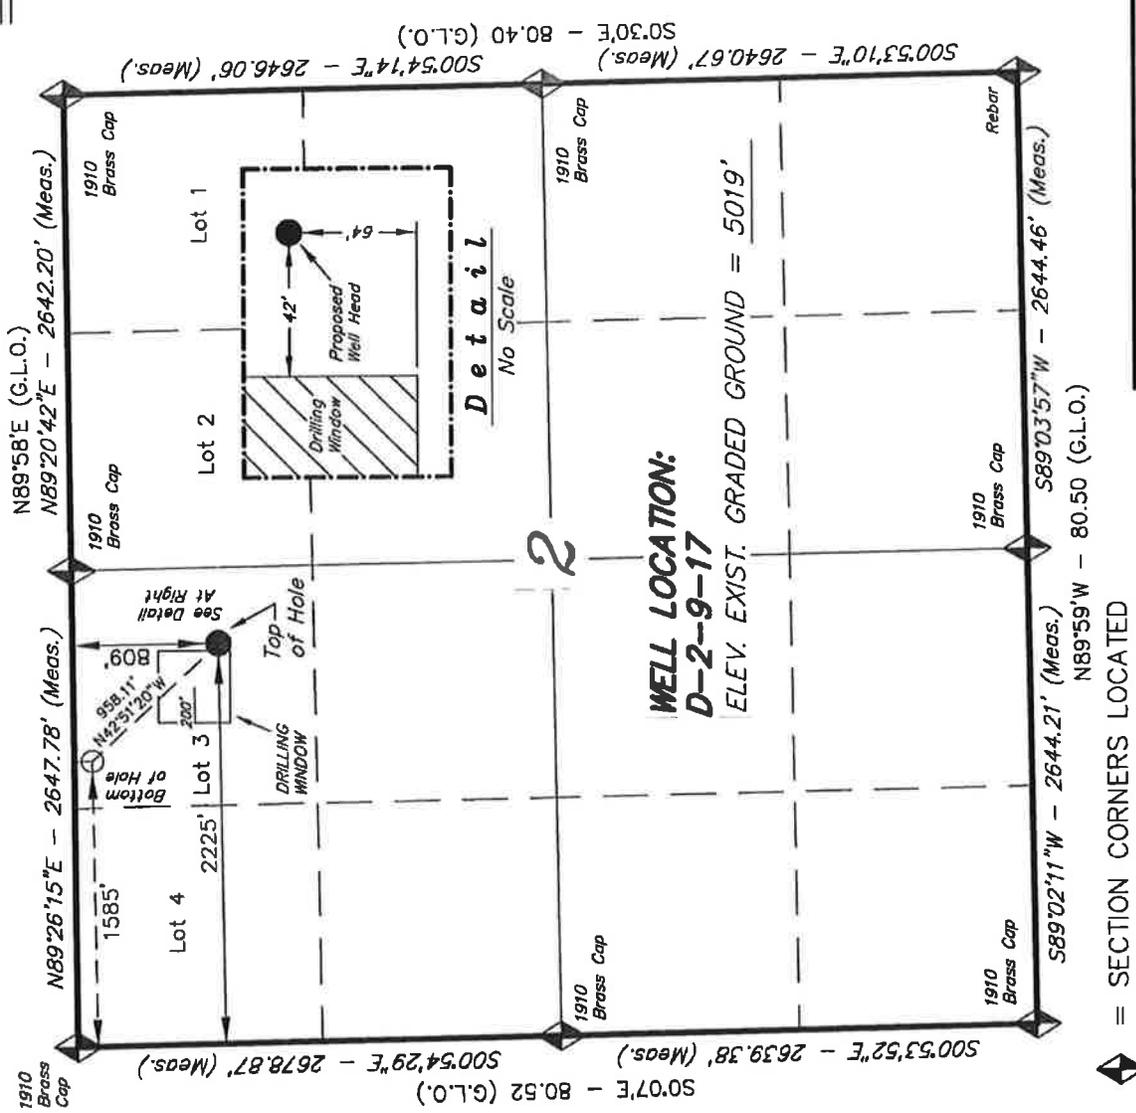


D-2-9-17  
(Surface Location) NAD 83  
LATITUDE = 40° 03' 54.06"  
LONGITUDE = 109° 58' 31.15"

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV; Elevations are based on an N.G.S. OPUS Correction. LOCATION: LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'

**Access Road Map**

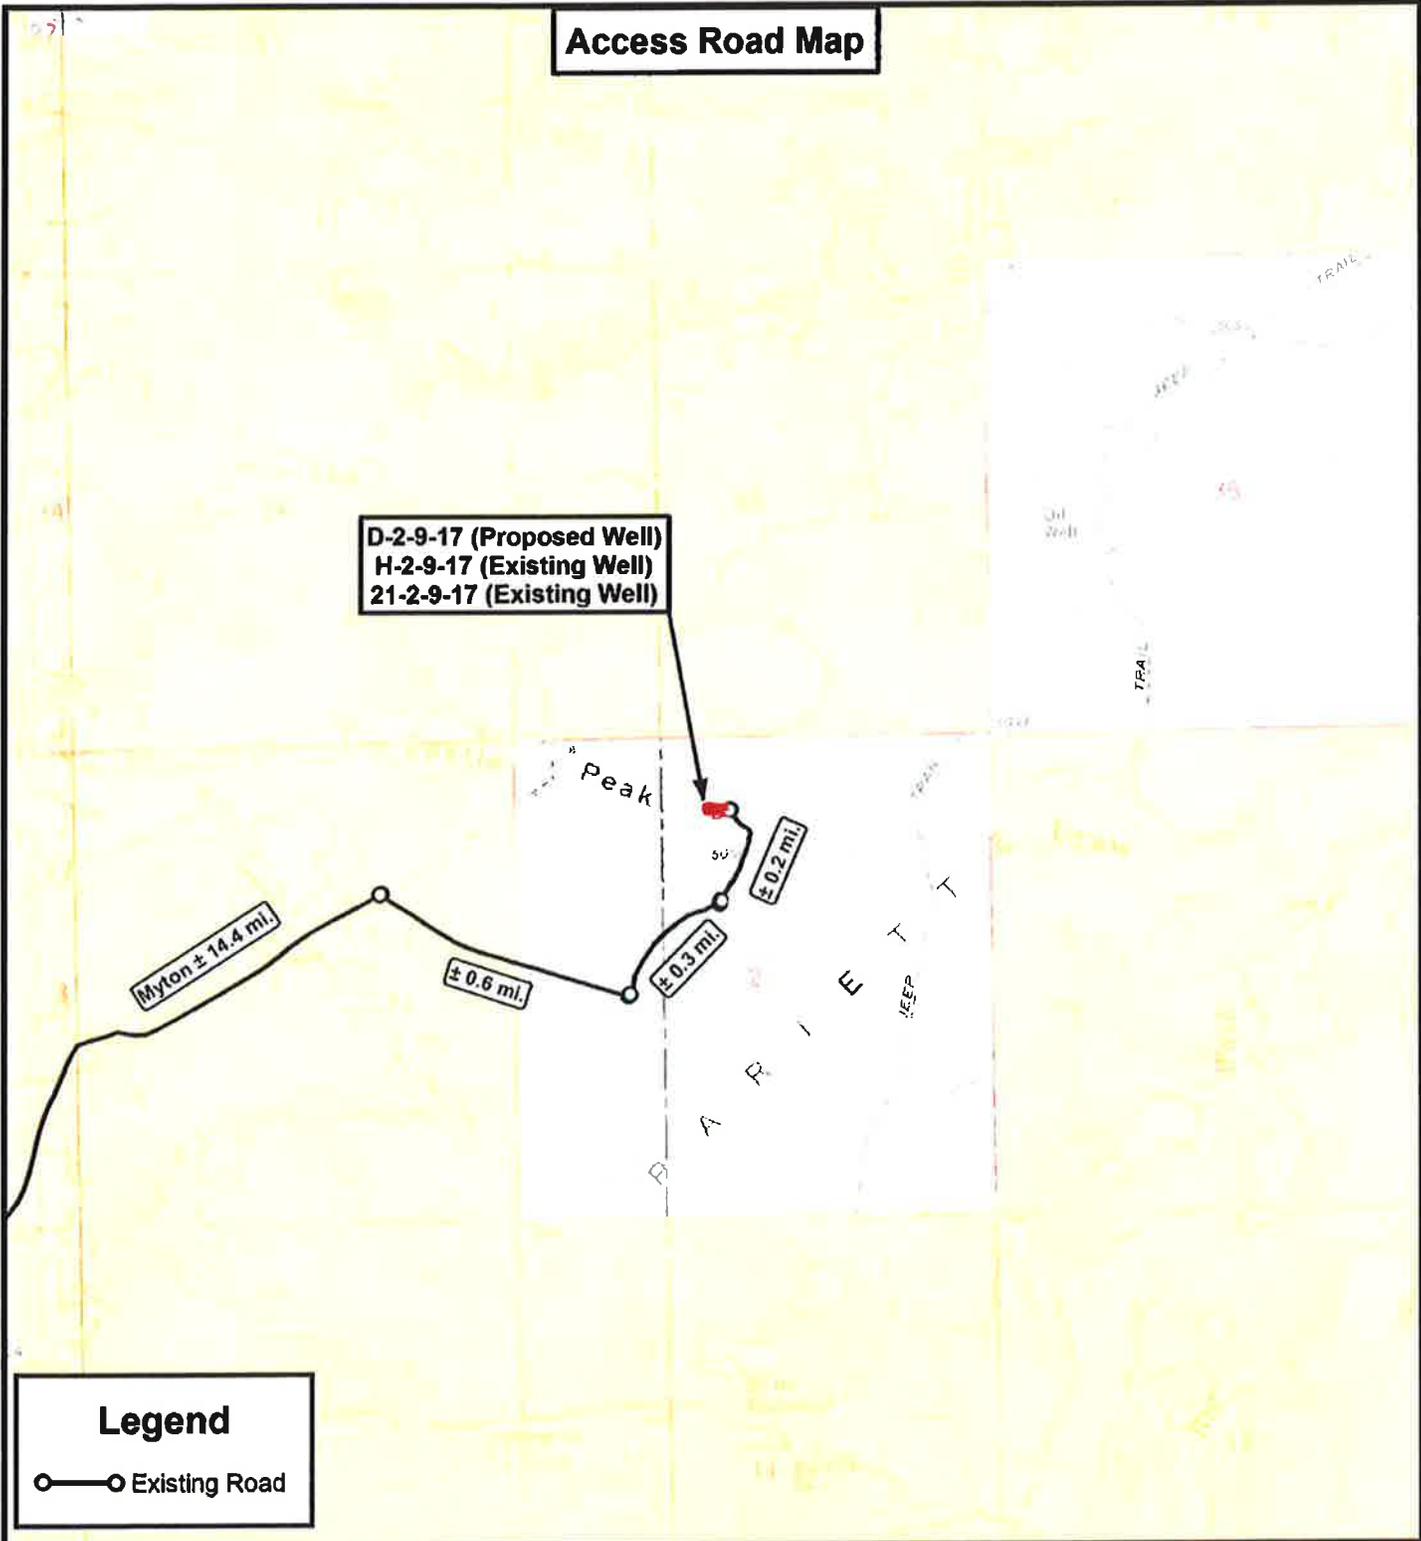

**Legend**

○—○ Existing Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

**Tri State Land Surveying, Inc.**  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
F: (435) 781-2518



**NEWFIELD EXPLORATION COMPANY**

D-2-9-17 (Proposed Well)  
H-2-9-17 (Existing Well)  
21-2-9-17 (Existing Well)  
SEC. 2, T9S, R17E, S.L.B.&M. Uintah County, UT.

DRAWN BY:	J.A.S.	REVISED:	VERSION:
DATE:	03-23-2011		V1
SCALE:	1" = 2,000'		

**TOPOGRAPHIC MAP**

SHEET **B**

# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office

P.O. Box 45155

Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:

3160

(UT-922)

April 11, 2011

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2011 Plan of Development Greater Monument  
Butte Unit, Duchesne and Uintah Counties,  
Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2011 within the Greater Monument Butte Unit, Duchesne and Uintah Counties, Utah.

API#	WELL NAME	LOCATION
------	-----------	----------

(Proposed PZ GREEN RIVER)

43-013-50673	GMBU S-2-9-15	Sec 02 T09S R15E 0581 FSL 2018 FEL BHL Sec 02 T09S R15E 1466 FSL 1109 FEL
43-013-50674	GMBU V-2-9-15	Sec 02 T09S R15E 0564 FSL 2031 FEL BHL Sec 02 T09S R15E 0100 FSL 1315 FEL
43-047-51553	GMBU D-2-9-17	Sec 02 T09S R17E 0809 FNL 2225 FWL BHL Sec 02 T09S R17E 0100 FNL 1585 FWL

This office has no objection to permitting the wells at this time.

Michael L. Coulthard

Digitally signed by Michael L. Coulthard  
DN: cn=Michael L. Coulthard, o=Bureau of Land Management,  
ou=Branch of Minerals, email=Michael\_Coulthard@blm.gov, c=US  
Date: 2011.04.11 11:54:22 -06'00'

bcc: File - Greater Monument Butte Unit

Division of Oil Gas and Mining

Central Files

Agr. Sec. Chron

Fluid Chron

MCoulthard:mc:4-11-11

RECEIVED: Jul. 07, 2011

**NEWFIELD**





Project: USGS Myton SW (UT)  
 Site: SECTION 2 T9, R15  
 Well: S-2-9-15  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to Grid North  
 True North: -0.83°  
 Magnetic North: 10.57°

Magnetic Field  
 Strength: 52277.1snT  
 Dip Angle: 65.78°  
 Date: 2011/03/15  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100'  
 TARGET RADIUS IS 75'

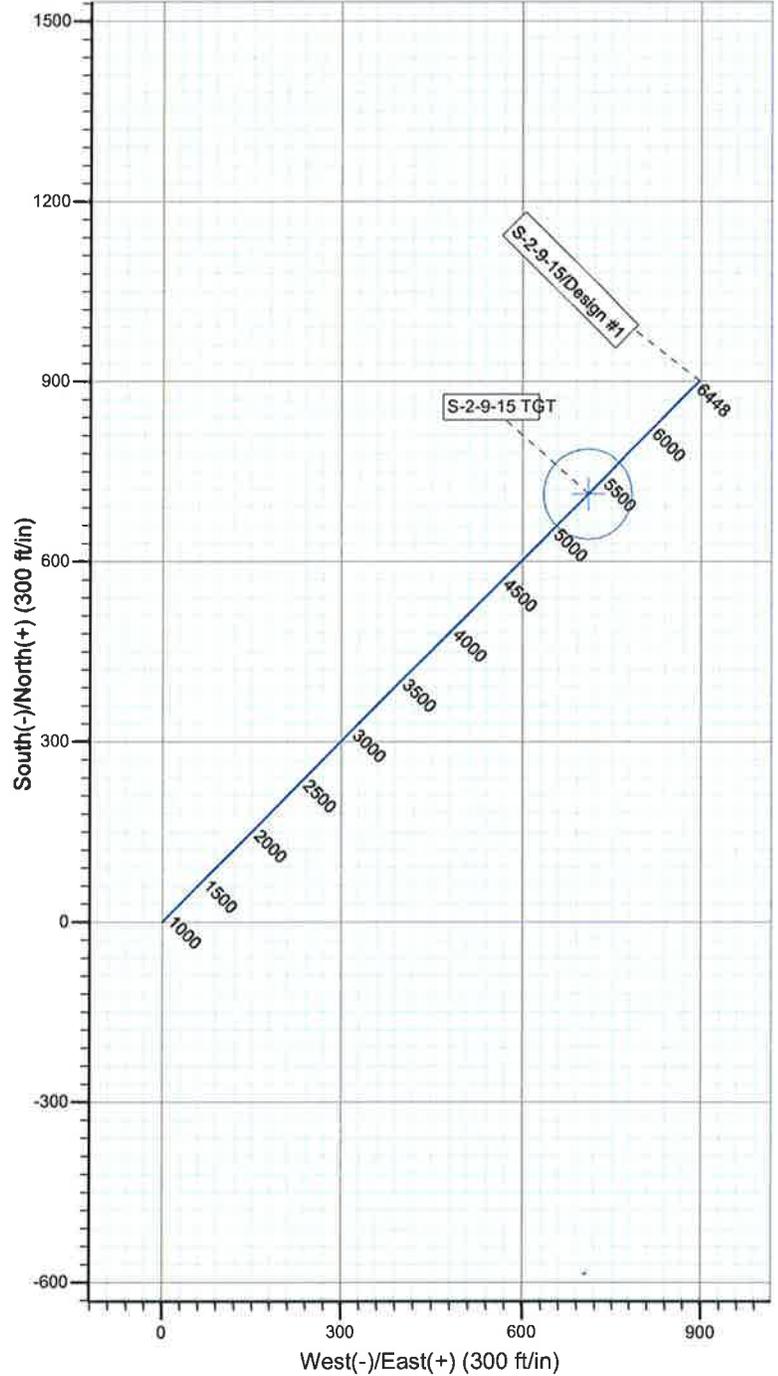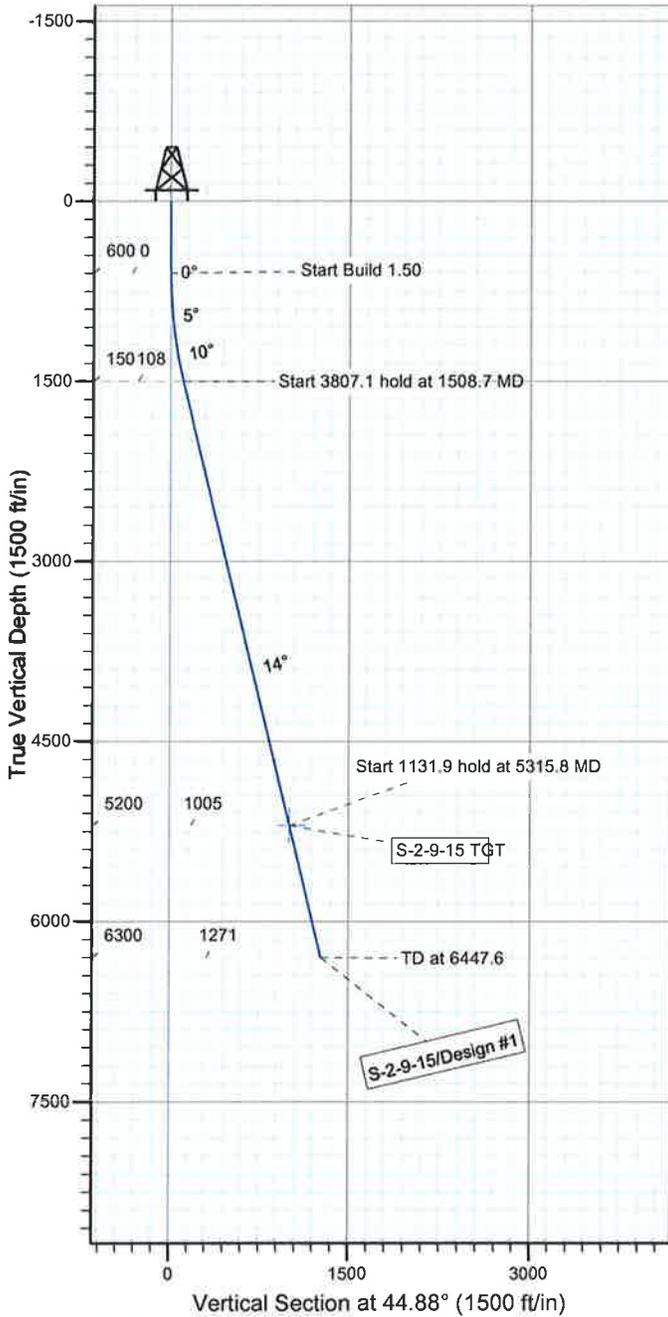

**WELLBORE TARGET DETAILS**

Name	TVD	+N/-S	+E/-W	Shape
S-2-9-15 TGT	5200.0	711.9	709.0	Circle (Radius: 75.0)

**SECTION DETAILS**

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1508.7	13.63	44.88	1500.2	76.2	75.9	1.50	44.88	107.6	
4	5315.8	13.63	44.88	5200.0	711.9	709.0	0.00	0.00	1004.7	S-2-9-15 TGT
5	6447.6	13.63	44.88	6300.0	900.9	897.3	0.00	0.00	1271.5	







Project: USGS Myton SW (UT)  
 Site: SECTION 2 T9, R15  
 Well: V-2-9-15  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to Grid North  
 True North: -0.83°  
 Magnetic North: 10.57°

Magnetic Field  
 Strength: 52277.0snT  
 Dip Angle: 65.78°  
 Date: 2011/03/15  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100'  
 TARGET RADIUS IS 75'

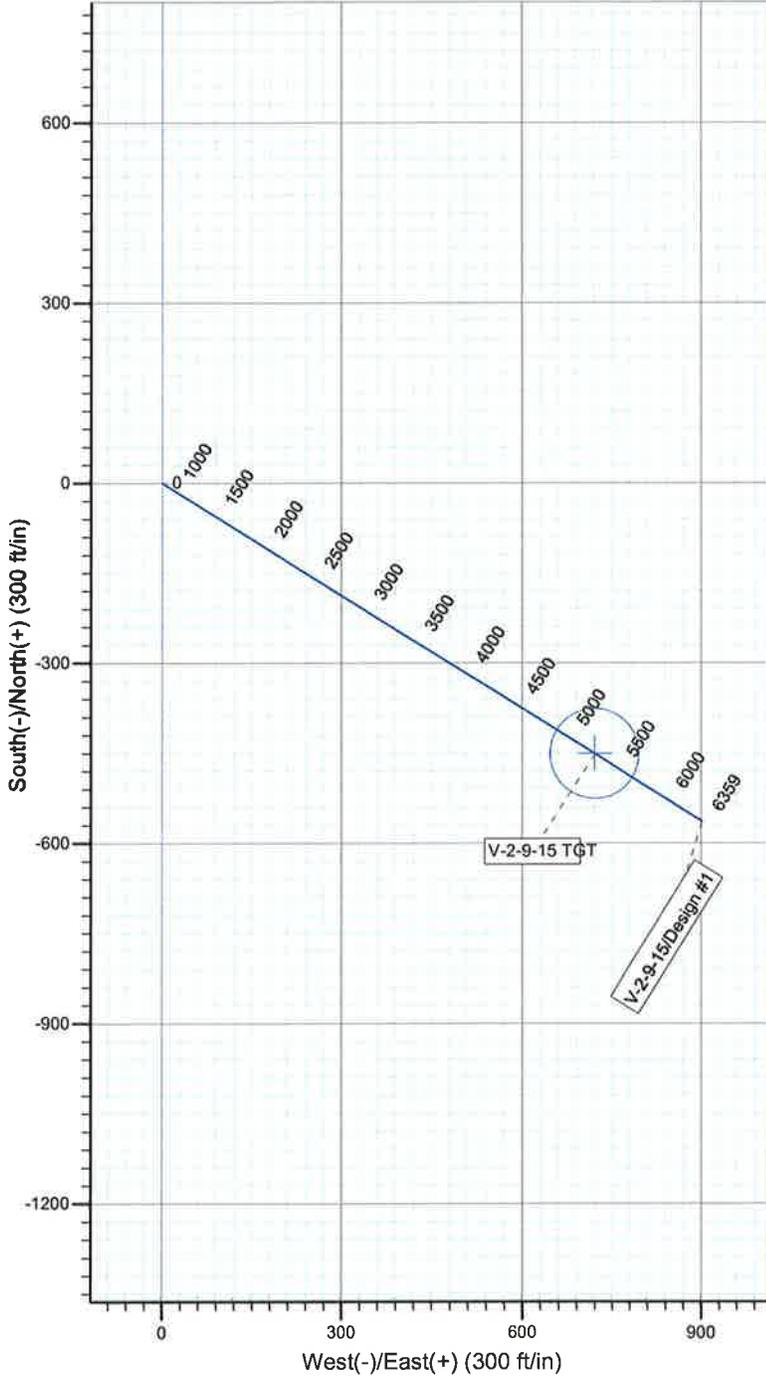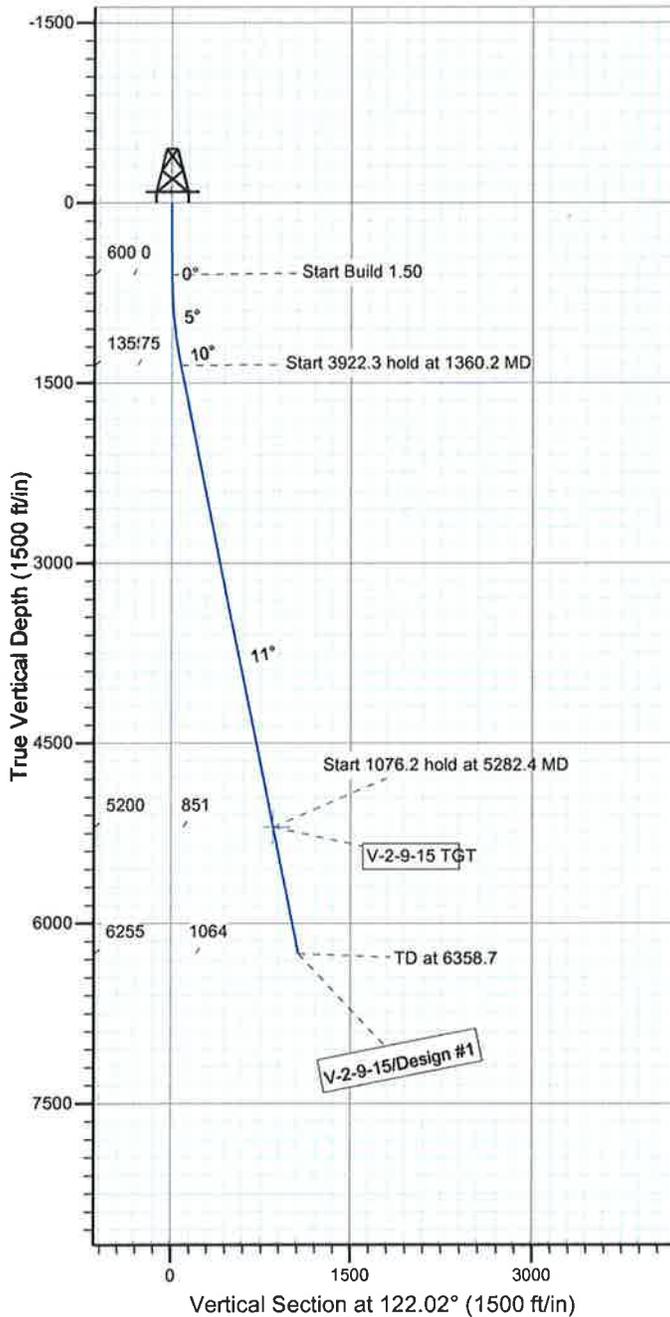

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
V-2-9-15 TGT	5200.0	-451.1	721.4	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1360.2	11.40	122.02	1355.1	-40.0	63.9	1.50	122.02	75.4	
4	5282.4	11.40	122.02	5200.0	-451.1	721.4	0.00	0.00	850.8	V-2-9-15 TGT
5	6358.7	11.40	122.02	6255.0	-563.9	901.8	0.00	0.00	1063.6	







Project: USGS Myton SW (UT)  
 Site: SECTION 2 T9S, R17E  
 Well: D-2-9-17  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.30°

Magnetic Field  
 Strength: 52316.5snT  
 Dip Angle: 65.83°  
 Date: 2011/04/06  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100'  
 TARGET RADIUS IS 75'

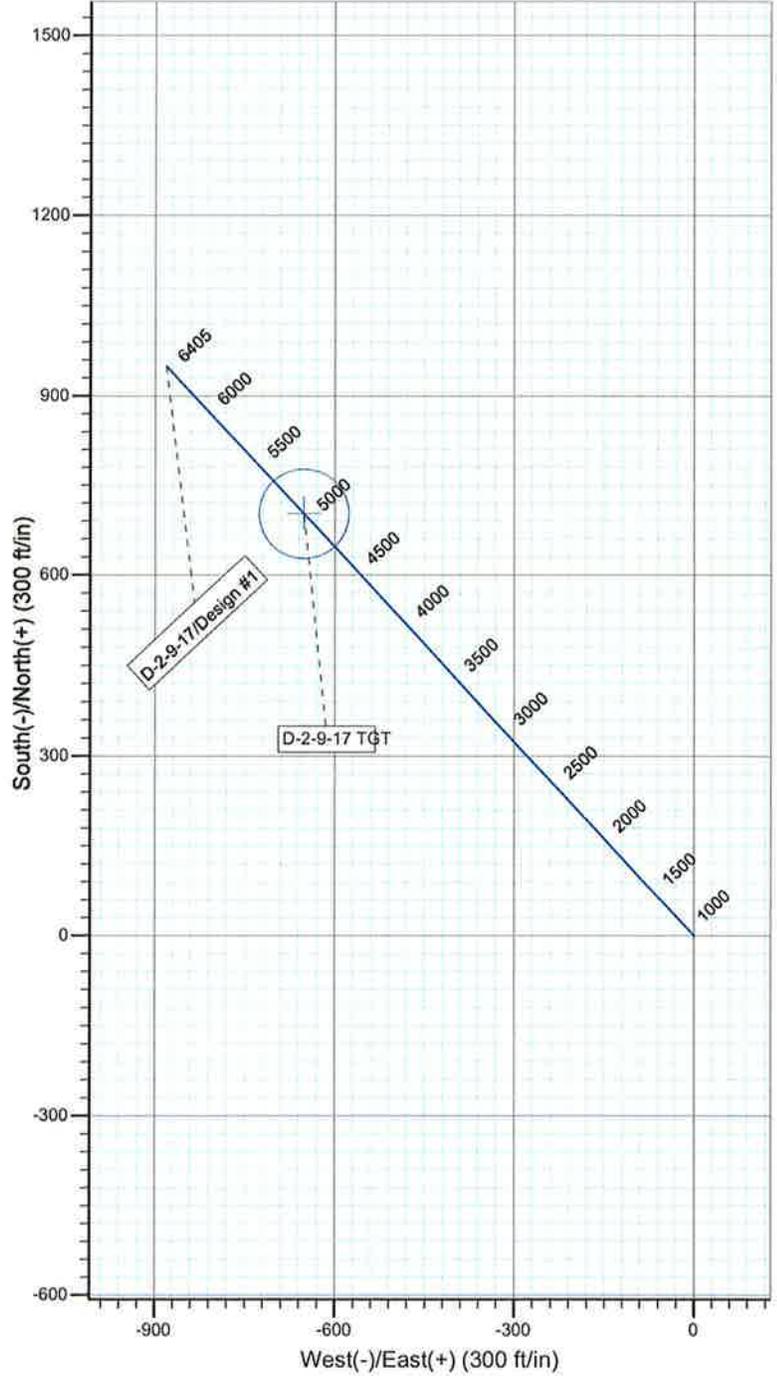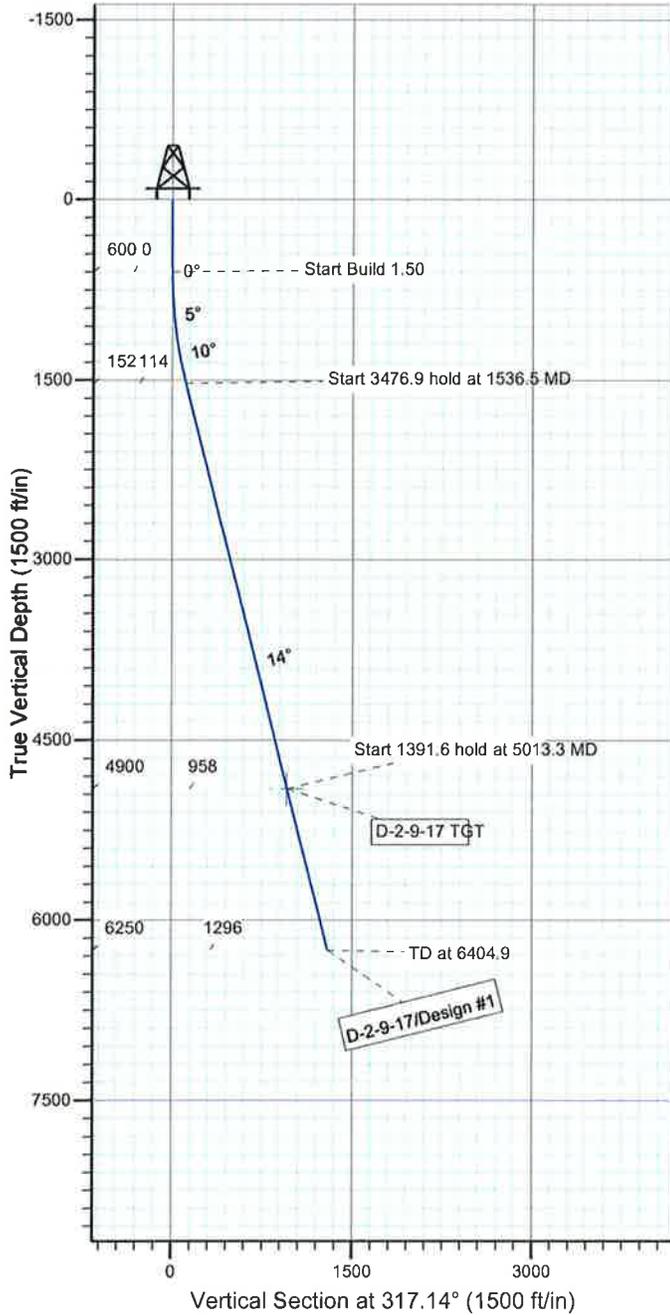


WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
D-2-9-17 TGT	4900.0	702.3	-651.7	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1536.5	14.05	317.14	1527.1	83.7	-77.7	1.50	317.14	114.2	
4	5013.3	14.05	317.14	4900.0	702.3	-651.7	0.00	0.00	958.1	D-2-9-17 TGT
5	6404.9	14.05	317.14	6250.0	949.9	-881.5	0.00	0.00	1295.9	




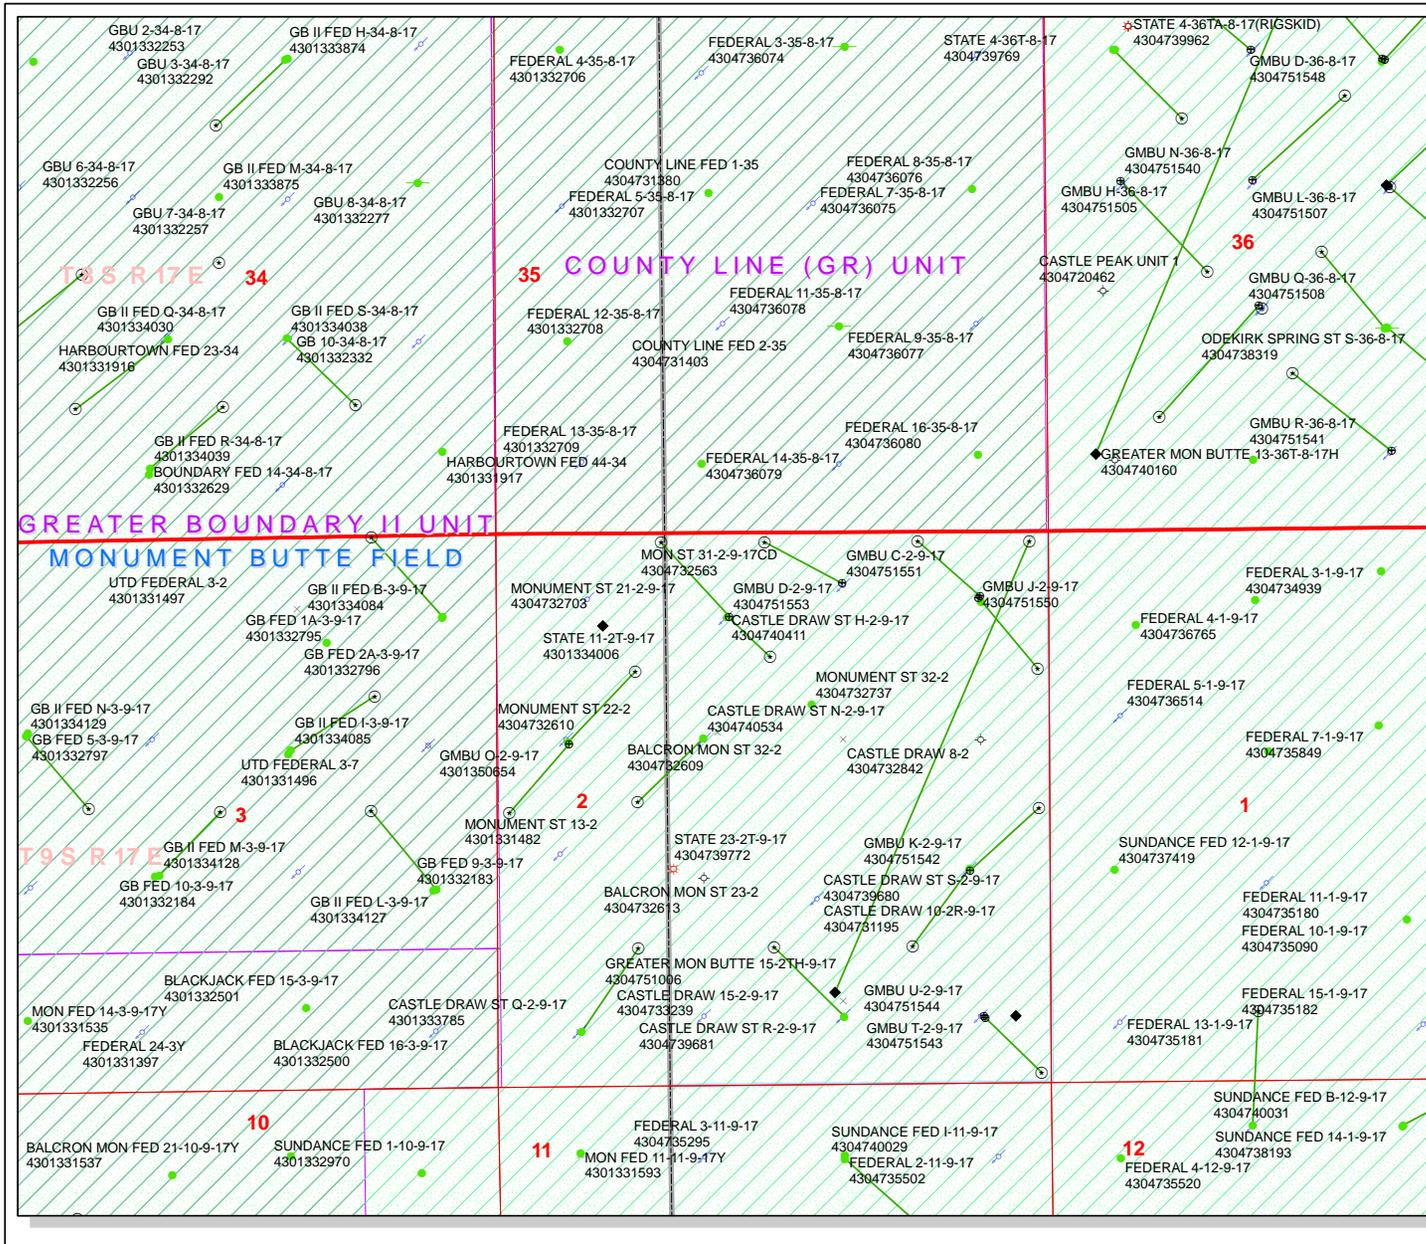

**API Number: 4304751553**  
**Well Name: GMBU D-2-9-17**  
 Township T09 . Range R17 . Section 02  
 Meridian: SLBM  
 Operator: NEWFIELD PRODUCTION COMPANY

Map Prepared:  
 Map Produced by Diana Mason

<b>Units</b>	<b>Wells Query Status</b>
ACTIVE	APD - Approved Permit
EXPLORATORY	DRL - Spudded (Drilling Commenced)
GAS STORAGE	GIW - Gas Injection
NF PP OIL	GS - Gas Storage
NF SECONDARY	LA - Location Abandoned
PI OIL	LOC - New Location
PP GAS	OPS - Operation Suspended
PP GEOTHERMAL	PA - Plugged Abandoned
PP OIL	PGW - Producing Gas Well
SECONDARY	POW - Producing Oil Well
TERMINATED	RET - Returned APD
<b>Fields</b>	SGW - Shut-in Gas Well
Unknown	SOW - Shut-in Oil Well
ABANDONED	TA - Temp. Abandoned
ACTIVE	TW - Test Well
COMBINED	WDW - Water Disposal
INACTIVE	WIW - Water Injection Well
STORAGE	WSW - Water Supply Well
TERMINATED	
Sections	
Township	



**From:** Jim Davis  
**To:** Bonner, Ed; Garrison, LaVonne; Hill, Brad; Mason, Diana  
**CC:** mcrozier@newfield.com; teaton@newfield.com  
**Date:** 5/12/2011 10:02 AM  
**Subject:** Newfield APD approvals

The following APDs have been approved by SITLA. Please see the arch and paleo notes below.

Arch and paleo clearance is granted on this group of APDs.

4301350649 GMBU I-32-8-17  
4304751540 GMBU N-36-8-17  
4301350658 GMBU O-32-8-17  
4301350659 State 3-36-9-16H  
4304751549 GMBU B-2-9-17  
4304751550 GMBU J-2-9-17  
4304751551 GMBU C-2-9-17  
4301350673 GMBU S-2-9-15  
4301350674 GMBU V-2-9-15  
4301350690 GMBU J-32-8-17

On existing pad, requiring no new surface disturbance. Arch and paleo not required.  
4304751553 GMBU D-2-9-17

-Jim Davis

Jim Davis  
Utah Trust Lands Administration  
jimdavis1@utah.gov  
Phone: (801) 538-5156

Well Name	NEWFIELD PRODUCTION COMPANY GMBU D-2-9-17 43047			
String	Surf	Prod		
Casing Size(")	8.625	5.500		
Setting Depth (TVD)	300	6250		
Previous Shoe Setting Depth (TVD)	0	300		
Max Mud Weight (ppg)	8.3	8.4		
BOPE Proposed (psi)	500	2000		
Casing Internal Yield (psi)	2950	4810		
Operators Max Anticipated Pressure (psi)	2754	8.5		

Calculations	Surf String	8.625	"
Max BHP (psi)	.052*Setting Depth*MW=	129	
			<b>BOPE Adequate For Drilling And Setting Casing at Depth?</b>
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=	93	YES <input type="checkbox"/> air drill
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=	63	YES <input type="checkbox"/> OK
			<b>*Can Full Expected Pressure Be Held At Previous Shoe?</b>
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=	63	NO <input type="checkbox"/> OK
Required Casing/BOPE Test Pressure=		300	psi
*Max Pressure Allowed @ Previous Casing Shoe=		0	psi *Assumes 1psi/ft frac gradient

Calculations	Prod String	5.500	"
Max BHP (psi)	.052*Setting Depth*MW=	2730	
			<b>BOPE Adequate For Drilling And Setting Casing at Depth?</b>
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=	1980	YES <input type="checkbox"/>
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=	1355	YES <input type="checkbox"/> OK
			<b>*Can Full Expected Pressure Be Held At Previous Shoe?</b>
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=	1421	NO <input type="checkbox"/> Reasonable fro area
Required Casing/BOPE Test Pressure=		2000	psi
*Max Pressure Allowed @ Previous Casing Shoe=		300	psi *Assumes 1psi/ft frac gradient

Calculations	String		"
Max BHP (psi)	.052*Setting Depth*MW=		
			<b>BOPE Adequate For Drilling And Setting Casing at Depth?</b>
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=		NO <input type="checkbox"/>
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=		NO <input type="checkbox"/>
			<b>*Can Full Expected Pressure Be Held At Previous Shoe?</b>
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=		NO <input type="checkbox"/>
Required Casing/BOPE Test Pressure=			psi
*Max Pressure Allowed @ Previous Casing Shoe=			psi *Assumes 1psi/ft frac gradient

Calculations	String		"
Max BHP (psi)	.052*Setting Depth*MW=		
			<b>BOPE Adequate For Drilling And Setting Casing at Depth?</b>
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=		NO <input type="checkbox"/>
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=		NO <input type="checkbox"/>
			<b>*Can Full Expected Pressure Be Held At Previous Shoe?</b>
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=		NO <input type="checkbox"/>
Required Casing/BOPE Test Pressure=			psi


API Well Number: 43047515530000

\*Max Pressure Allowed @ Previous Casing Shoe=

psi \*Assumes 1psi/ft frac gradient

# 43047515530000 GMBU D-2-9-17

## Casing Schematic

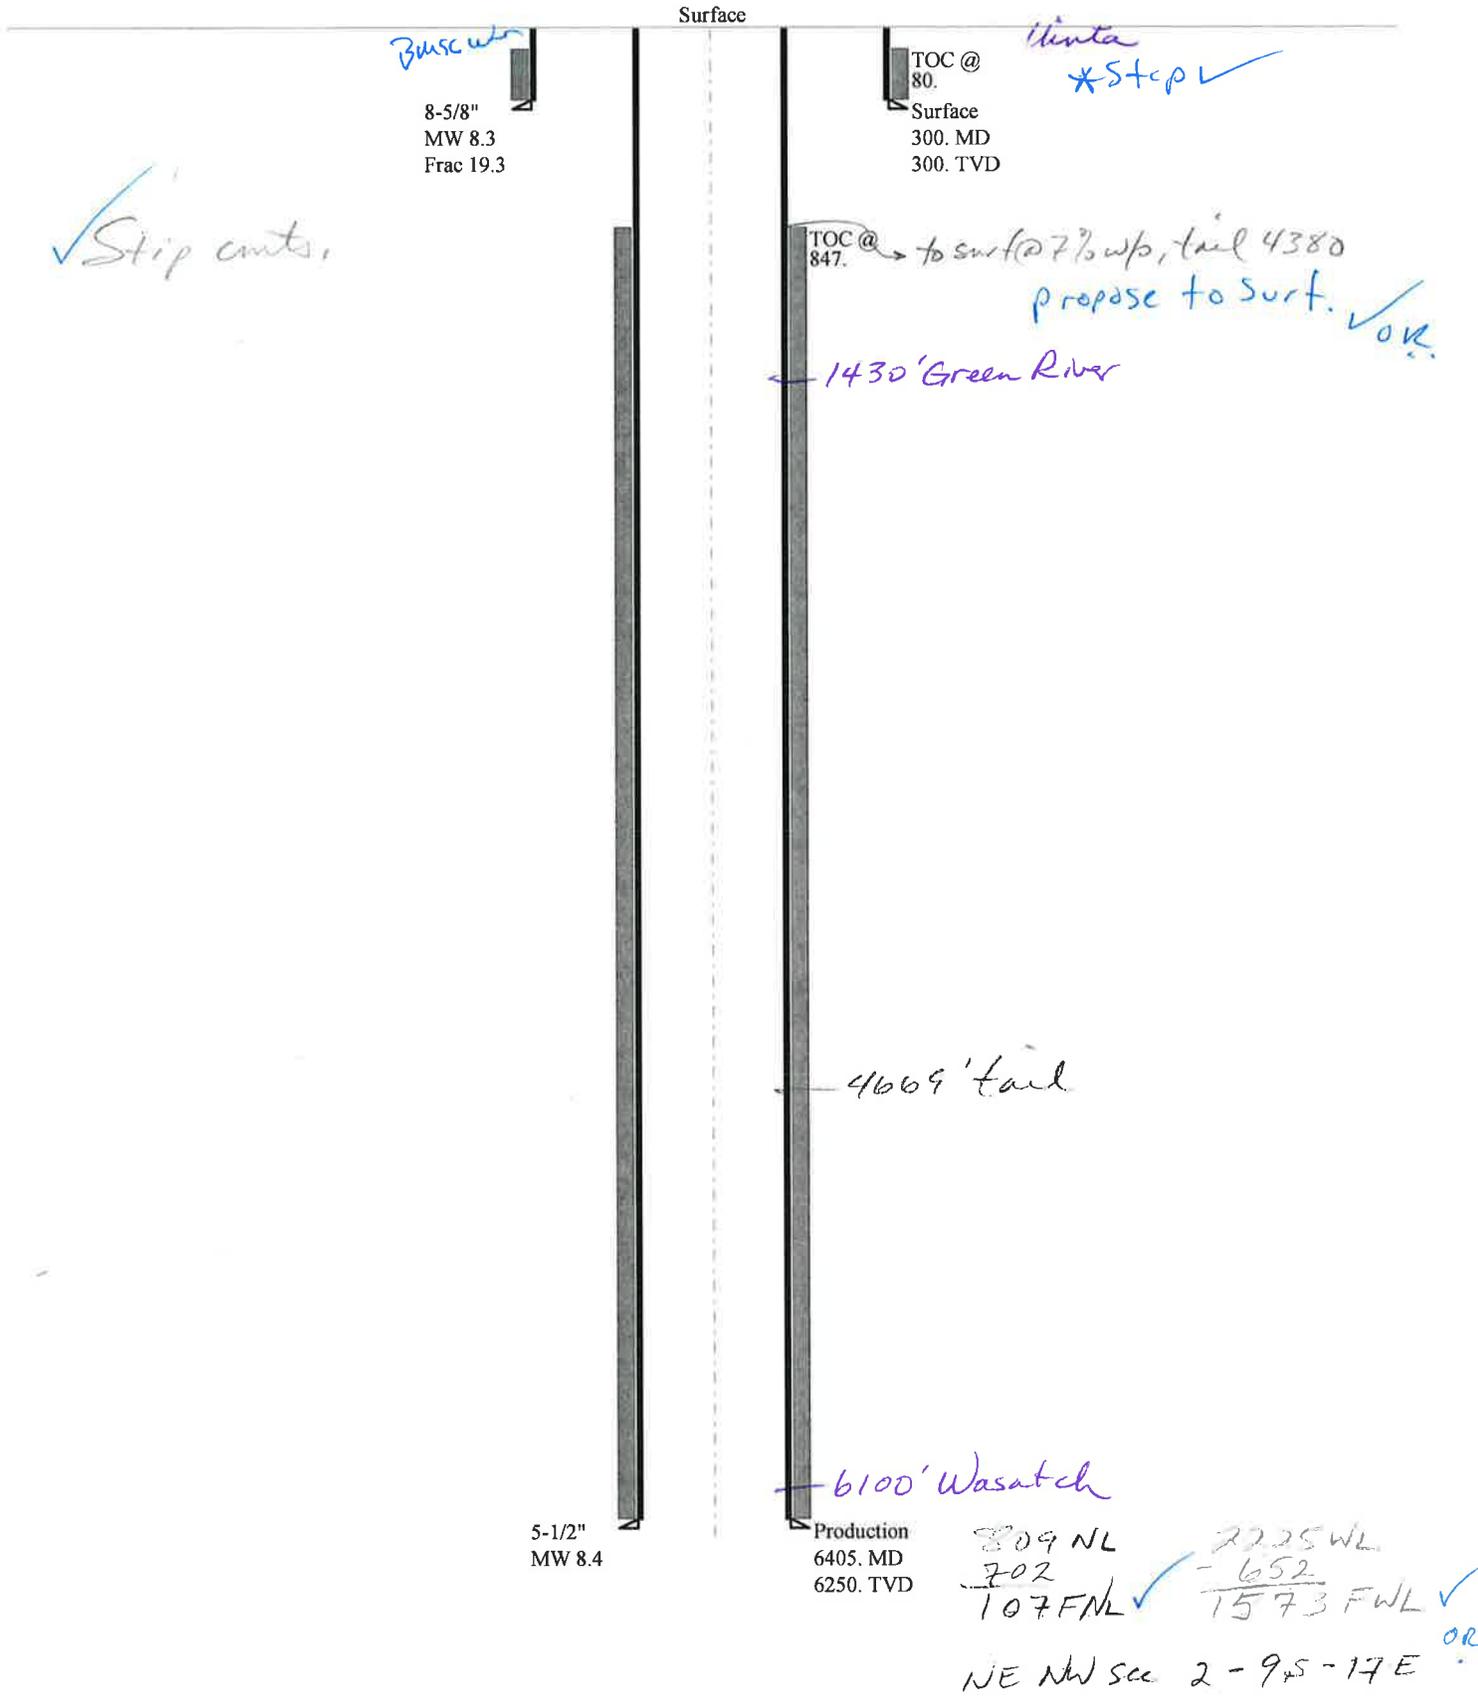

Well name:	<b>43047515530000 GMBU D-2-9-17</b>		
Operator:	<b>NEWFIELD PRODUCTION COMPANY</b>		
String type:	Surface	Project ID:	43-047-51553
Location:	UINTAH COUNTY		

**Design parameters:**

**Collapse**

Mud weight: 8.330 ppg  
 Design is based on evacuated pipe.

**Minimum design factors:**

**Collapse:**

Design factor 1.125

**Burst:**

Design factor 1.00

**Environment:**

H2S considered? No  
 Surface temperature: 74 °F  
 Bottom hole temperature: 78 °F  
 Temperature gradient: 1.40 °F/100ft  
 Minimum section length: 100 ft  
 Cement top: 80 ft

**Burst**

Max anticipated surface pressure: 264 psi  
 Internal gradient: 0.120 psi/ft  
 Calculated BHP 300 psi

No backup mud specified.

**Tension:**

8 Round STC: 1.80 (J)  
 8 Round LTC: 1.70 (J)  
 Buttress: 1.60 (J)  
 Premium: 1.50 (J)  
 Body yield: 1.50 (B)

Tension is based on air weight.  
 Neutral point: 262 ft

**Non-directional string.**

**Re subsequent strings:**

Next setting depth: 6,250 ft  
 Next mud weight: 8,400 ppg  
 Next setting BHP: 2,727 psi  
 Fracture mud wt: 19.250 ppg  
 Fracture depth: 300 ft  
 Injection pressure: 300 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost (\$)
1	300	8.625	24.00	J-55	ST&C	300	300	7.972	1544
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (kips)	Tension Strength (kips)	Tension Design Factor
1	130	1370	10.557	300	2950	9.83	7.2	244	33.90 J

Prepared by: Helen Sadik-Macdonald  
 Div of Oil, Gas & Mining

Phone: 801 538-5357  
 FAX: 801-359-3940

Date: June 28, 2011  
 Salt Lake City, Utah

**Remarks:**

Collapse is based on a vertical depth of 300 ft, a mud weight of 8.33 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

*Engineering responsibility for use of this design will be that of the purchaser.*

Well name:	<b>43047515530000 GMBU D-2-9-17</b>		
Operator:	<b>NEWFIELD PRODUCTION COMPANY</b>		
String type:	Production	Project ID:	43-047-51553
Location:	UINTAH COUNTY		

**Design parameters:**

**Collapse**

Mud weight: 8.400 ppg  
 Design is based on evacuated pipe.

**Minimum design factors:**

**Collapse:**

Design factor 1.125

**Burst:**

Design factor 1.00

**Environment:**

H2S considered? No  
 Surface temperature: 74 °F  
 Bottom hole temperature: 162 °F  
 Temperature gradient: 1.40 °F/100ft  
 Minimum section length: 100 ft  
 Cement top: 847 ft

**Burst**

Max anticipated surface pressure: 1,352 psi  
 Internal gradient: 0.220 psi/ft  
 Calculated BHP 2,727 psi

No backup mud specified.

**Tension:**

8 Round STC: 1.80 (J)  
 8 Round LTC: 1.80 (J)  
 Buttress: 1.60 (J)  
 Premium: 1.50 (J)  
 Body yield: 1.60 (B)

Tension is based on air weight.  
 Neutral point: 5,586 ft

**Directional Info - Build & Hold**

Kick-off point 600 ft  
 Departure at shoe: 1296 ft  
 Maximum dogleg: 1.5 °/100ft  
 Inclination at shoe: 14.05 °

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost (\$)
1	6405	5.5	15.50	J-55	LT&C	6250	6405	4.825	22616
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (kips)	Tension Strength (kips)	Tension Design Factor
1	2727	4040	1.481	2727	4810	1.76	96.9	217	2.24 J

Prepared by: Helen Sadik-Macdonald  
 Div of Oil, Gas & Mining

Phone: 801 538-5357  
 FAX: 801-359-3940

Date: June 28, 2011  
 Salt Lake City, Utah

**Remarks:**

Collapse is based on a vertical depth of 6250 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Collapse strength is (biaxially) derated for doglegs in directional wells by multiplying the tensile stress by the cross section area to calculate a

*Engineering responsibility for use of this design will be that of the purchaser.*

# ON-SITE PREDRILL EVALUATION

## Utah Division of Oil, Gas and Mining

**Operator** NEWFIELD PRODUCTION COMPANY  
**Well Name** GMBU D-2-9-17  
**API Number** 43047515530000      **APD No** 3627      **Field/Unit** MONUMENT BUTTE  
**Location: 1/4,1/4** NENW    **Sec** 2    **Tw** 9.0S    **Rng** 17.0E    809 FNL 2225 FWL  
**GPS Coord (UTM)** 587449 4435270      **Surface Owner**

### Participants

Floyd Bartlett (DOGM), Tim Eaton (Newfield), Jim Davis (SITLA) and Alex Hansen and Ben Williams (UDWR).

### Regional/Local Setting & Topography

The proposed GMBU D-2-9-17 oil well is a directional well to be drilled from the existing pad of the existing Castle Draw State H-2-9-17 producing oil well and the Monument State 21-2-9-17 water flood injection well. The area is designated for 20 acre spacing. The pad will be extended up to 42 feet on the east end into nearly flat terrain. A reserve pit will be re-dug in approximately the previous location. The previous reserve pit has been re-claimed and seeded. After the new well is completed and the pit closed the existing berm on the south and west sides of the location should be reconstructed to catch any flows from the rocky hillsides in these areas from entering the pad. The oil will be piped to another site.

A field review of the existing pad showed no concerns as it now exists and it should be suitable for drilling and operating the proposed additional well.

SITLA owns the surface.

### Surface Use Plan

#### **Current Surface Use**

Existing Well Pad

<b>New Road Miles</b>	<b>Well Pad</b>	<b>Src Const Material</b>	<b>Surface Formation</b>
	<b>Width    Length</b>		
0			

#### **Ancillary Facilities**

### Waste Management Plan Adequate?

### Environmental Parameters

**Affected Floodplains and/or Wetlands** N

#### **Flora / Fauna**

Existing pad.

#### **Soil Type and Characteristics**

**Erosion Issues** Y

**Sedimentation Issues** Y

**Site Stability Issues** N

**Drainage Diverson Required? Y**

. After the new well is completed and the pit closed the existing berm on the south and west sides of the location should be reconstructed to catch any flows from the rocky hillsides in these areas from entering the pad.

**Berm Required? Y**

**Erosion Sedimentation Control Required? Y**

After the new well is completed and the pit closed the existing berm on the south and west sides of the location should be reconstructed to catch any flows from the rocky hillsides in these areas from entering the pad.

**Paleo Survey Run? Y    Paleo Potential Observed? N    Cultural Survey Run? Y    Cultural Resources?**

**Reserve Pit**

**Site-Specific Factors**

**Site Ranking**

<b>Distance to Groundwater (feet)</b>	100 to 200	5	
<b>Distance to Surface Water (feet)</b>	>1000	0	
<b>Dist. Nearest Municipal Well (ft)</b>	>5280	0	
<b>Distance to Other Wells (feet)</b>		20	
<b>Native Soil Type</b>	Mod permeability	10	
<b>Fluid Type</b>	Fresh Water	5	
<b>Drill Cuttings</b>	Normal Rock	0	
<b>Annual Precipitation (inches)</b>		0	
<b>Affected Populations</b>			
<b>Presence Nearby Utility Conduits</b>	Not Present	0	
	<b>Final Score</b>	40	1 Sensitivity Level

**Characteristics / Requirements**

A reserve pit will be re-dug in the original location on the south side. Its dimensions are 80' x 40' x 8' deep. A 16 mil liner with an appropriate sub-liner is required.

**Closed Loop Mud Required? N    Liner Required? Y    Liner Thickness 16    Pit Underlayment Required? Y**

**Other Observations / Comments**

Floyd Bartlett  
**Evaluator**

4/25/2011  
**Date / Time**

# Application for Permit to Drill Statement of Basis

7/7/2011

## Utah Division of Oil, Gas and Mining

Page 1

<b>APD No</b>	<b>API WellNo</b>	<b>Status</b>	<b>Well Type</b>	<b>Surf Owner</b>	<b>CBM</b>
3627	43047515530000	LOCKED	OW	S	No
<b>Operator</b>	NEWFIELD PRODUCTION COMPANY		<b>Surface Owner-APD</b>		
<b>Well Name</b>	GMBU D-2-9-17		<b>Unit</b>	GMBU (GRRV)	
<b>Field</b>	MONUMENT BUTTE		<b>Type of Work</b>	DRILL	
<b>Location</b>	NENW 2 9S 17E S 809 FNL 2225 FWL		GPS Coord (UTM)	587446E	4435271N

### Geologic Statement of Basis

Newfield proposes to set 300' of surface casing at this location. The the base of the moderately saline water at this location is estimated to be at a or near the surface. A search of Division of Water Rights records shows no water wells within a 10,000 foot radius of the center of Section 2. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be a significant source of useable ground water. The proposed casing and cement programs shouls adequately protect ground water in the area.

Brad Hill  
**APD Evaluator**

4/28/2011  
**Date / Time**

### Surface Statement of Basis

The proposed GMBU D-2-9-17 oil well is a directional well to be drilled from the existing pad of the existing Castle Draw State H-2-9-17 producing oil well and the Monument State 21-2-9-17 water flood injection well. The area in designated for 20 acre spacing. The pad will be extended up to 42 feet on the east end into nearly flat terrain. A reserve pit will be re-dug in approximately the previous location. The previous reserve pit has been re-claimed and seeded. After the new well is completed and the pit closed the existing berm on the south and west sides of the location should be reconstructed to catch any flows from the rocky hillsides in these areas from entering the pad. The oil will be piped to another site.

A field review of the existing pad showed no concerns as it now exists and it should be suitable for drilling and operating the proposed additional well.

SITLA owns the surface. Mr. Jim Davis of SITLA attended the evaluation and had no concerns. Mr. Alex Hansen and Mr. Ben Williams of the UDWR also attended and had no recommendations for wildlife.

A reserve pit will be re-dug in the original location on the south side. Its dimensions are 80' x 40' x 8' deep. A 16 mil liner with an appropriate sub-liner is required.

Floyd Bartlett  
**Onsite Evaluator**

4/25/2011  
**Date / Time**

### Conditions of Approval / Application for Permit to Drill

<b>Category</b>	<b>Condition</b>
Pits	A synthetic liner with a minimum thickness of 16 mils with a felt subliner shall be properly installed and maintained in the reserve pit.
Surface	The well site shall be bermed to prevent fluids from leaving the pad.
Surface	Drainages adjacent to the proposed pad shall be diverted around the location.
Surface	The reserve pit shall be fenced upon completion of drilling operations.

## WORKSHEET APPLICATION FOR PERMIT TO DRILL

**APD RECEIVED:** 4/7/2011**API NO. ASSIGNED:** 43047515530000**WELL NAME:** GMBU D-2-9-17**OPERATOR:** NEWFIELD PRODUCTION COMPANY (N2695)**PHONE NUMBER:** 435 646-4825**CONTACT:** Mandie Crozier**PROPOSED LOCATION:** NENW 02 090S 170E**Permit Tech Review:** **SURFACE:** 0809 FNL 2225 FWL**Engineering Review:** **BOTTOM:** 0100 FNL 1585 FWL**Geology Review:** **COUNTY:** UINTAH**LATITUDE:** 40.06505**LONGITUDE:** -109.97463**UTM SURF EASTINGS:** 587446.00**NORTHINGS:** 4435271.00**FIELD NAME:** MONUMENT BUTTE**LEASE TYPE:** 3 - State**LEASE NUMBER:** ML-45555**PROPOSED PRODUCING FORMATION(S):** GREEN RIVER**SURFACE OWNER:** 3 - State**COALBED METHANE:** NO**RECEIVED AND/OR REVIEWED:**

- PLAT**
- Bond:** STATE - B001834
- Potash**
- Oil Shale 190-5**
- Oil Shale 190-3**
- Oil Shale 190-13**
- Water Permit:** 437478
- RDCC Review:**
- Fee Surface Agreement**
- Intent to Commingle**

**Commingle Approved****LOCATION AND SITING:**

- R649-2-3.**
- Unit:** GMBU (GRRV)
- R649-3-2. General**
- R649-3-3. Exception**
- Drilling Unit**
- Board Cause No:** Cause 213-11
- Effective Date:** 11/30/2009
- Siting:** Suspends General Siting
- R649-3-11. Directional Drill**

**Comments:** Presite Completed

**Stipulations:** 5 - Statement of Basis - bhill  
 8 - Cement to Surface -- 2 strings - ddoucet  
 15 - Directional - dmason  
 27 - Other - bhill



GARY R. HERBERT  
*Governor*

GREGORY S. BELL  
*Lieutenant Governor*

## State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER  
*Executive Director*

Division of Oil, Gas and Mining

JOHN R. BAZA  
*Division Director*

### Permit To Drill

\*\*\*\*\*

**Well Name:** GMBU D-2-9-17  
**API Well Number:** 43047515530000  
**Lease Number:** ML-45555  
**Surface Owner:** STATE  
**Approval Date:** 7/7/2011

**Issued to:**

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

**Authority:**

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 213-11. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

**Duration:**

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

**General:**

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

**Conditions of Approval:**

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis (copy attached).

Production casing cement shall be brought up to or above the top of the unitized interval for the Greater Monument Butte Unit (Cause No. 213-11).

Cement volumes for the 8 5/8" and 5 1/2" casing strings shall be determined from actual hole diameters in order to place cement from the pipe setting depths back to the surface as indicated in the submitted drilling plan.

**Additional Approvals:**

The operator is required to obtain approval from the Division of Oil, Gas and mining before performing any of the following actions during the drilling of this well:

- Any changes to the approved drilling plan – contact Dustin Doucet

- Significant plug back of the well – contact Dustin Doucet
- Plug and abandonment of the well – contact Dustin Doucet

**Notification Requirements:**

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well – contact Carol Daniels  
OR  
submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at <http://oilgas.ogm.utah.gov>
- 24 hours prior to testing blowout prevention equipment - contact Dan Jarvis
- 24 hours prior to cementing or testing casing – contact Dan Jarvis
- Within 24 hours of making any emergency changes to the approved drilling program – contact Dustin Doucet
- 24 hours prior to commencing operations to plug and abandon the well – contact Dan Jarvis

**Contact Information:**

The following are Division of Oil, Gas and Mining contacts and their telephone numbers (please leave a voicemail message if the person is not available to take the call):

- Carol Daniels 801-538-5284 - office
- Dustin Doucet 801-538-5281 - office  
801-733-0983 - after office hours
- Dan Jarvis 801-538-5338 - office  
801-231-8956 - after office hours

**Reporting Requirements:**

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

**Approved By:**



For John Rogers  
Associate Director, Oil & Gas

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT

<b>APPLICATION FOR PERMIT TO DRILL</b>		<b>1. WELL NAME and NUMBER</b> GMBU D-2-9-17
<b>2. TYPE OF WORK</b> DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>		<b>3. FIELD OR WILDCAT</b> MONUMENT BUTTE
<b>4. TYPE OF WELL</b> Oil Well Coalbed Methane Well: NO		<b>5. UNIT or COMMUNITIZATION AGREEMENT NAME</b> GMBU (GRRV)
<b>6. NAME OF OPERATOR</b> NEWFIELD PRODUCTION COMPANY		<b>7. OPERATOR PHONE</b> 435 646-4825
<b>8. ADDRESS OF OPERATOR</b> Rt 3 Box 3630 , Myton, UT, 84052		<b>9. OPERATOR E-MAIL</b> mcrozier@newfield.com
<b>10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE)</b> ML-45555	<b>11. MINERAL OWNERSHIP</b> FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>	
<b>12. SURFACE OWNERSHIP</b> FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>		<b>13. NAME OF SURFACE OWNER (if box 12 = 'fee')</b>
<b>14. SURFACE OWNER PHONE (if box 12 = 'fee')</b>		<b>15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')</b>
<b>16. SURFACE OWNER E-MAIL (if box 12 = 'fee')</b>		<b>17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')</b>
<b>18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS</b> YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>		<b>19. SLANT</b> VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/>

20. LOCATION OF WELL	FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN
LOCATION AT SURFACE	809 FNL 2225 FWL	NENW	2	9.0 S	17.0 E	S
Top of Uppermost Producing Zone	287 FNL 1741 FWL	NENW	2	9.0 S	17.0 E	S
At Total Depth	100 FNL 1585 FWL	NENW	2	9.0 S	17.0 E	S

<b>21. COUNTY</b> UINTAH	<b>22. DISTANCE TO NEAREST LEASE LINE (Feet)</b> 100	<b>23. NUMBER OF ACRES IN DRILLING UNIT</b> 20
<b>25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed)</b> 990	<b>26. PROPOSED DEPTH</b> MD: 6334 TVD: 6334	
<b>27. ELEVATION - GROUND LEVEL</b> 5019	<b>28. BOND NUMBER</b> B001834	<b>29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE</b> 437478

Hole, Casing, and Cement Information										
String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement	Sacks	Yield	Weight
SURF	12.25	8.625	0 - 300	24.0	J-55 ST&C	8.3	Class G	138	1.17	15.8
PROD	7.875	5.5	0 - 6334	15.5	J-55 LT&C	8.3	Premium Lite High Strength	299	3.26	11.0
							50/50 Poz	363	1.24	14.3

**ATTACHMENTS**

**VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES**

<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)	<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)	<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP

<b>NAME</b> Mandie Crozier	<b>TITLE</b> Regulatory Tech	<b>PHONE</b> 435 646-4825
<b>SIGNATURE</b>	<b>DATE</b> 04/07/2011	<b>EMAIL</b> mcrozier@newfield.com
<b>API NUMBER ASSIGNED</b> 43047515530000	<b>APPROVAL</b>   Permit Manager	

NEWFIELD PRODUCTION COMPANY  
 GMBU D-2-9-17  
 AT SURFACE: NE/NW SECTION 2, T9S, R17E  
 UTAH COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0' – 1430'
Green River	1430'
Wasatch	6100'
<b>Proposed TD</b>	<b>6334'</b>

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation (Oil)	1430' – 6100'
-----------------------------	---------------

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 300'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO <sub>3</sub> ) (mg/l)
Dissolved Bicarbonate (NaHCO <sub>3</sub> ) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO <sub>4</sub> ) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. **PROPOSED CASING PROGRAM**

a. **Casing Design: GMBU D-2-9-17**

Size	Interval		Weight	Grade	Coupling	Design Factors		
	Top	Bottom				Burst	Collapse	Tension
Surface casing 8-5/8"	0'	300'	24.0	J-55	STC	2,950 17.53	1,370 14.35	244,000 33.89
Prod casing 5-1/2"	0'	6,334'	15.5	J-55	LTC	4,810 2.39	4,040 2.00	217,000 2.21

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe =	13.0 ppg
Pore pressure at surface casing shoe =	8.33 ppg
Pore pressure at prod casing shoe =	8.33 ppg
Gas gradient =	0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. **Cementing Design: GMBU D-2-9-17**

Job	Fill	Description	Sacks	OH Excess*	Weight (ppg)	Yield (ft <sup>3</sup> /sk)
			ft <sup>3</sup>			
Surface casing	300'	Class G w/ 2% CaCl	138	30%	15.8	1.17
			161			
Prod casing Lead	4,334'	Prem Lite II w/ 10% gel + 3% KCl	299	30%	11.0	3.26
			976			
Prod casing Tail	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363	30%	14.3	1.24
			451			

\*Actual volume pumped will be 15% over the caliper log

- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
- Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to  $\pm 300$  feet will be drilled with an air/mist system. The air rig is equipped with a 6 1/2" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about  $\pm 300$  feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 300' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**


No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the second quarter of 2011, and take approximately seven (7) days from spud to rig release.


# T9S, R17E, S.L.B.&M.

## NEWFIELD EXPLORATION COMPANY

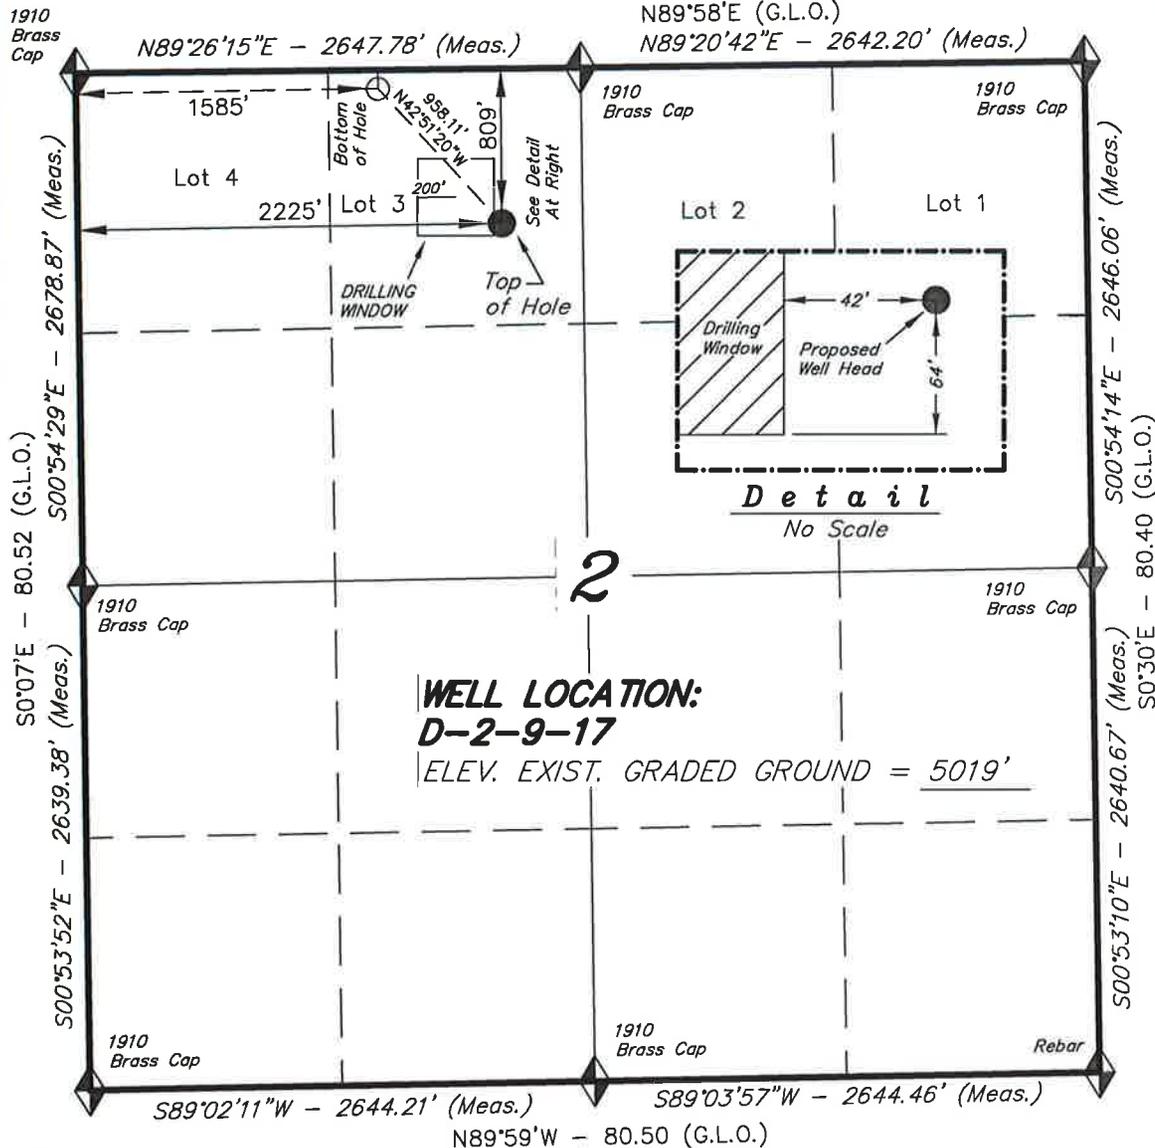

WELL LOCATION, D-2-9-17, LOCATED AS SHOWN IN THE NE 1/4 NW 1/4 (LOT 3) OF SECTION 2, T9S, R17E, S.L.B.&M. UTAH COUNTY, UTAH.

TARGET BOTTOM HOLE, D-2-9-17, LOCATED AS SHOWN IN THE NE 1/4 NW 1/4 (LOT 3) OF SECTION 2, T9S, R17E, S.L.B.&M. UTAH COUNTY, UTAH.



**NOTES:**

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.
3. The Bottom of Hole footages are 100' FNL & 1585' FWL.

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

REGISTERED LAND SURVEYOR  
 STACY W. STEWART  
 REGISTRATION No. 189377  
 STATE OF UTAH  
 03-19-11

◆ = SECTION CORNERS LOCATED


BASIS OF ELEV; Elevations are based on an N.G.S. OPUS Correction. LOCATION: LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'

**D-2-9-17**  
 (Surface Location) NAD 83  
 LATITUDE = 40° 03' 54.06"  
 LONGITUDE = 109° 58' 31.15"

**TRI STATE LAND SURVEYING & CONSULTING**  
 180 NORTH VERNAL AVE. - VERNAL, UTAH 84078  
 (435) 781-2501

DATE SURVEYED: 03-07-11	SURVEYED BY: K.S.	VERSION:
DATE DRAWN: 03-18-11	DRAWN BY: F.T.M.	V1
REVISED:	SCALE: 1" = 1000'	

**Access Road Map**

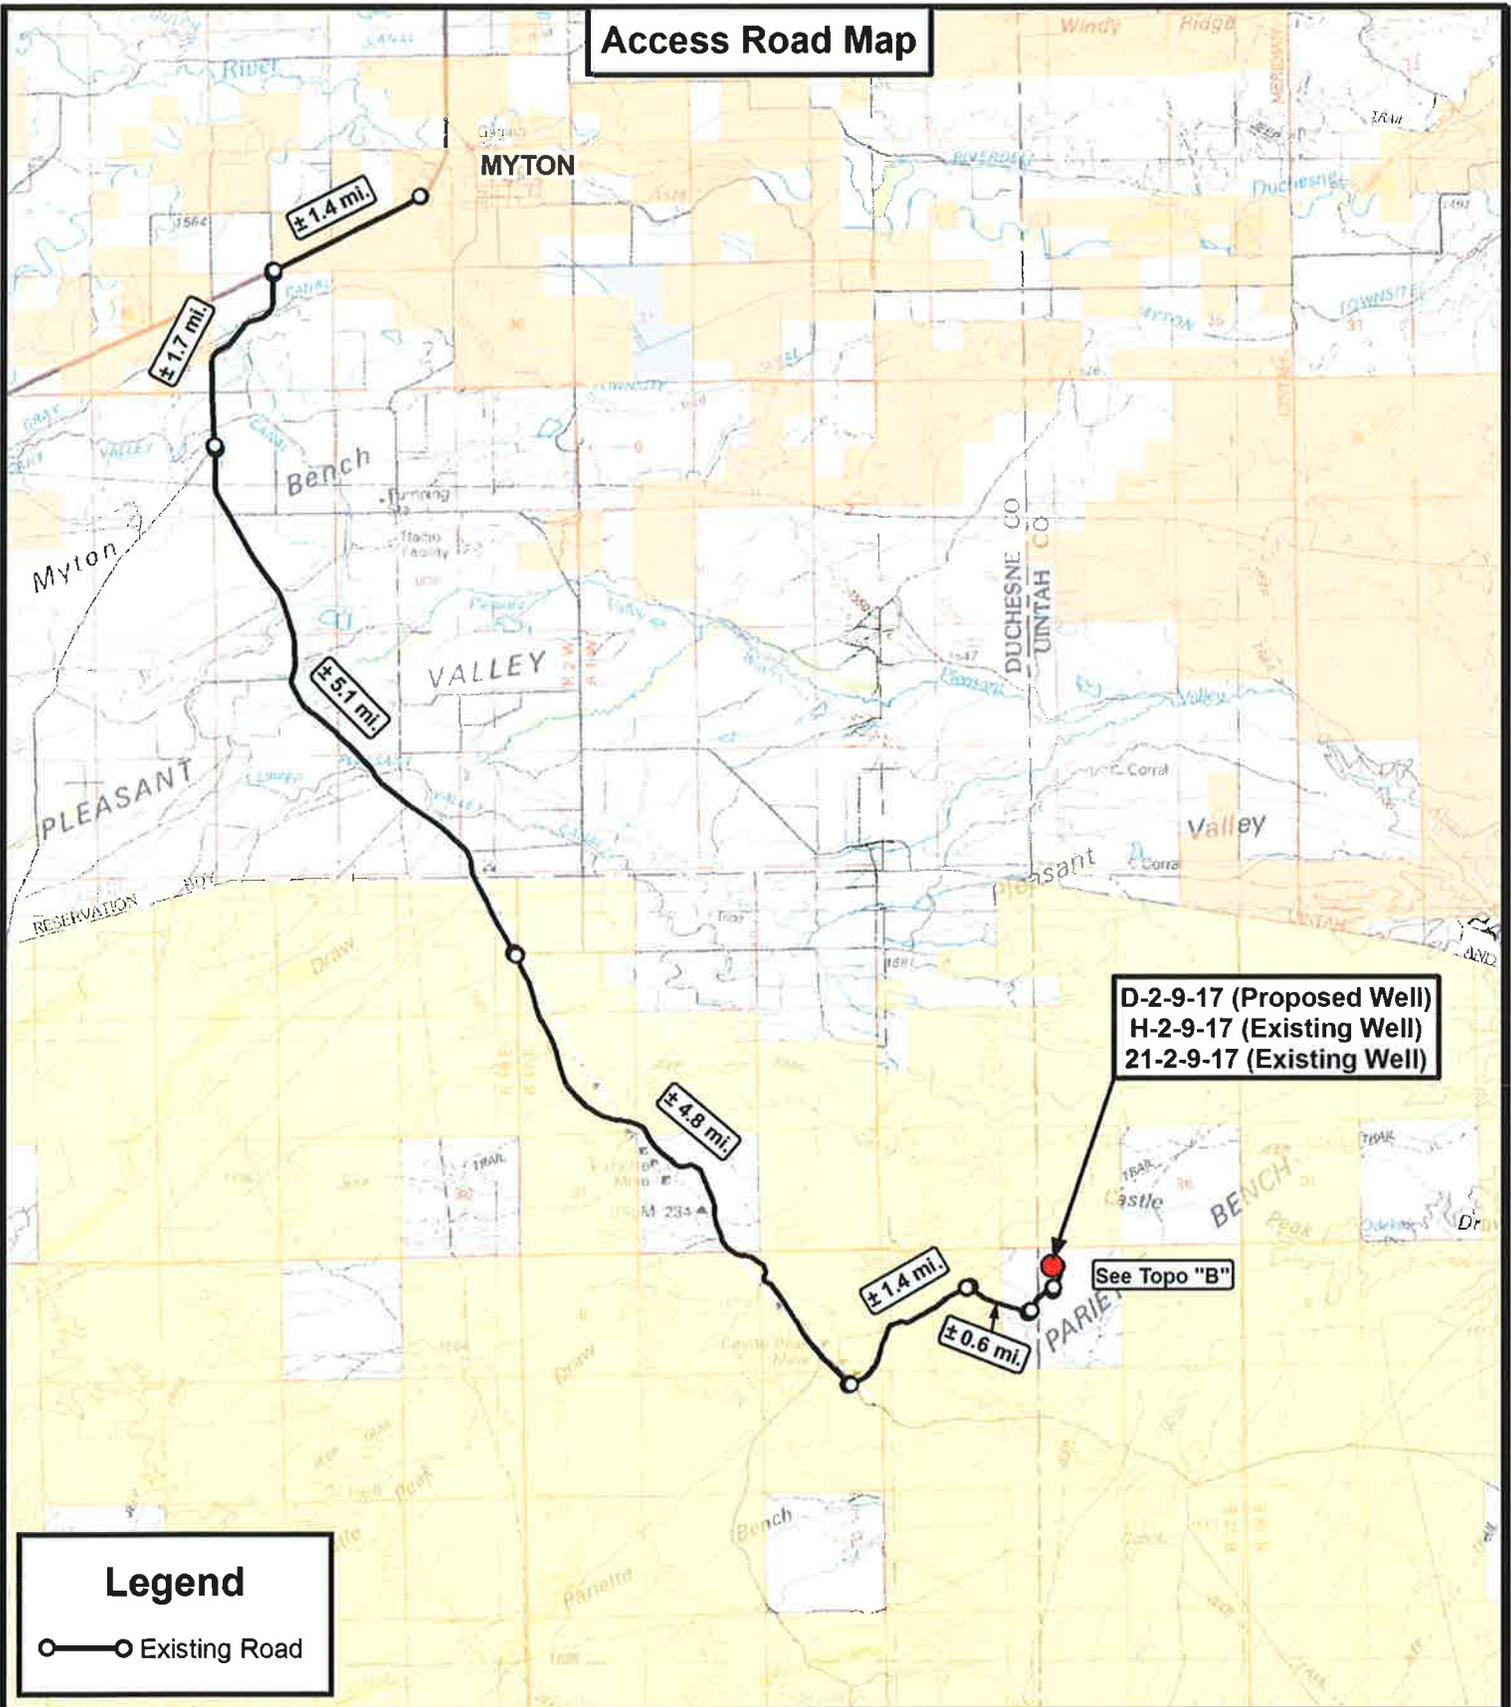

**Legend**

○ — ○ Existing Road

D-2-9-17 (Proposed Well)  
 H-2-9-17 (Existing Well)  
 21-2-9-17 (Existing Well)

See Topo "B"

**Tri State Land Surveying, Inc.**  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
 F: (435) 781-2518



**NEWFIELD EXPLORATION COMPANY**


D-2-9-17 (Proposed Well)  
 H-2-9-17 (Existing Well)  
 21-2-9-17 (Existing Well)  
 SEC. 2, T9S, R17E, S.L.B.&M. Uintah County, UT.

DRAWN BY:	J.A.S.	REVISED:		VERSION:	
DATE:	03-23-2011			V1	
SCALE:	1:100,000				

**TOPOGRAPHIC MAP**

SHEET **A**

**Access Road Map**

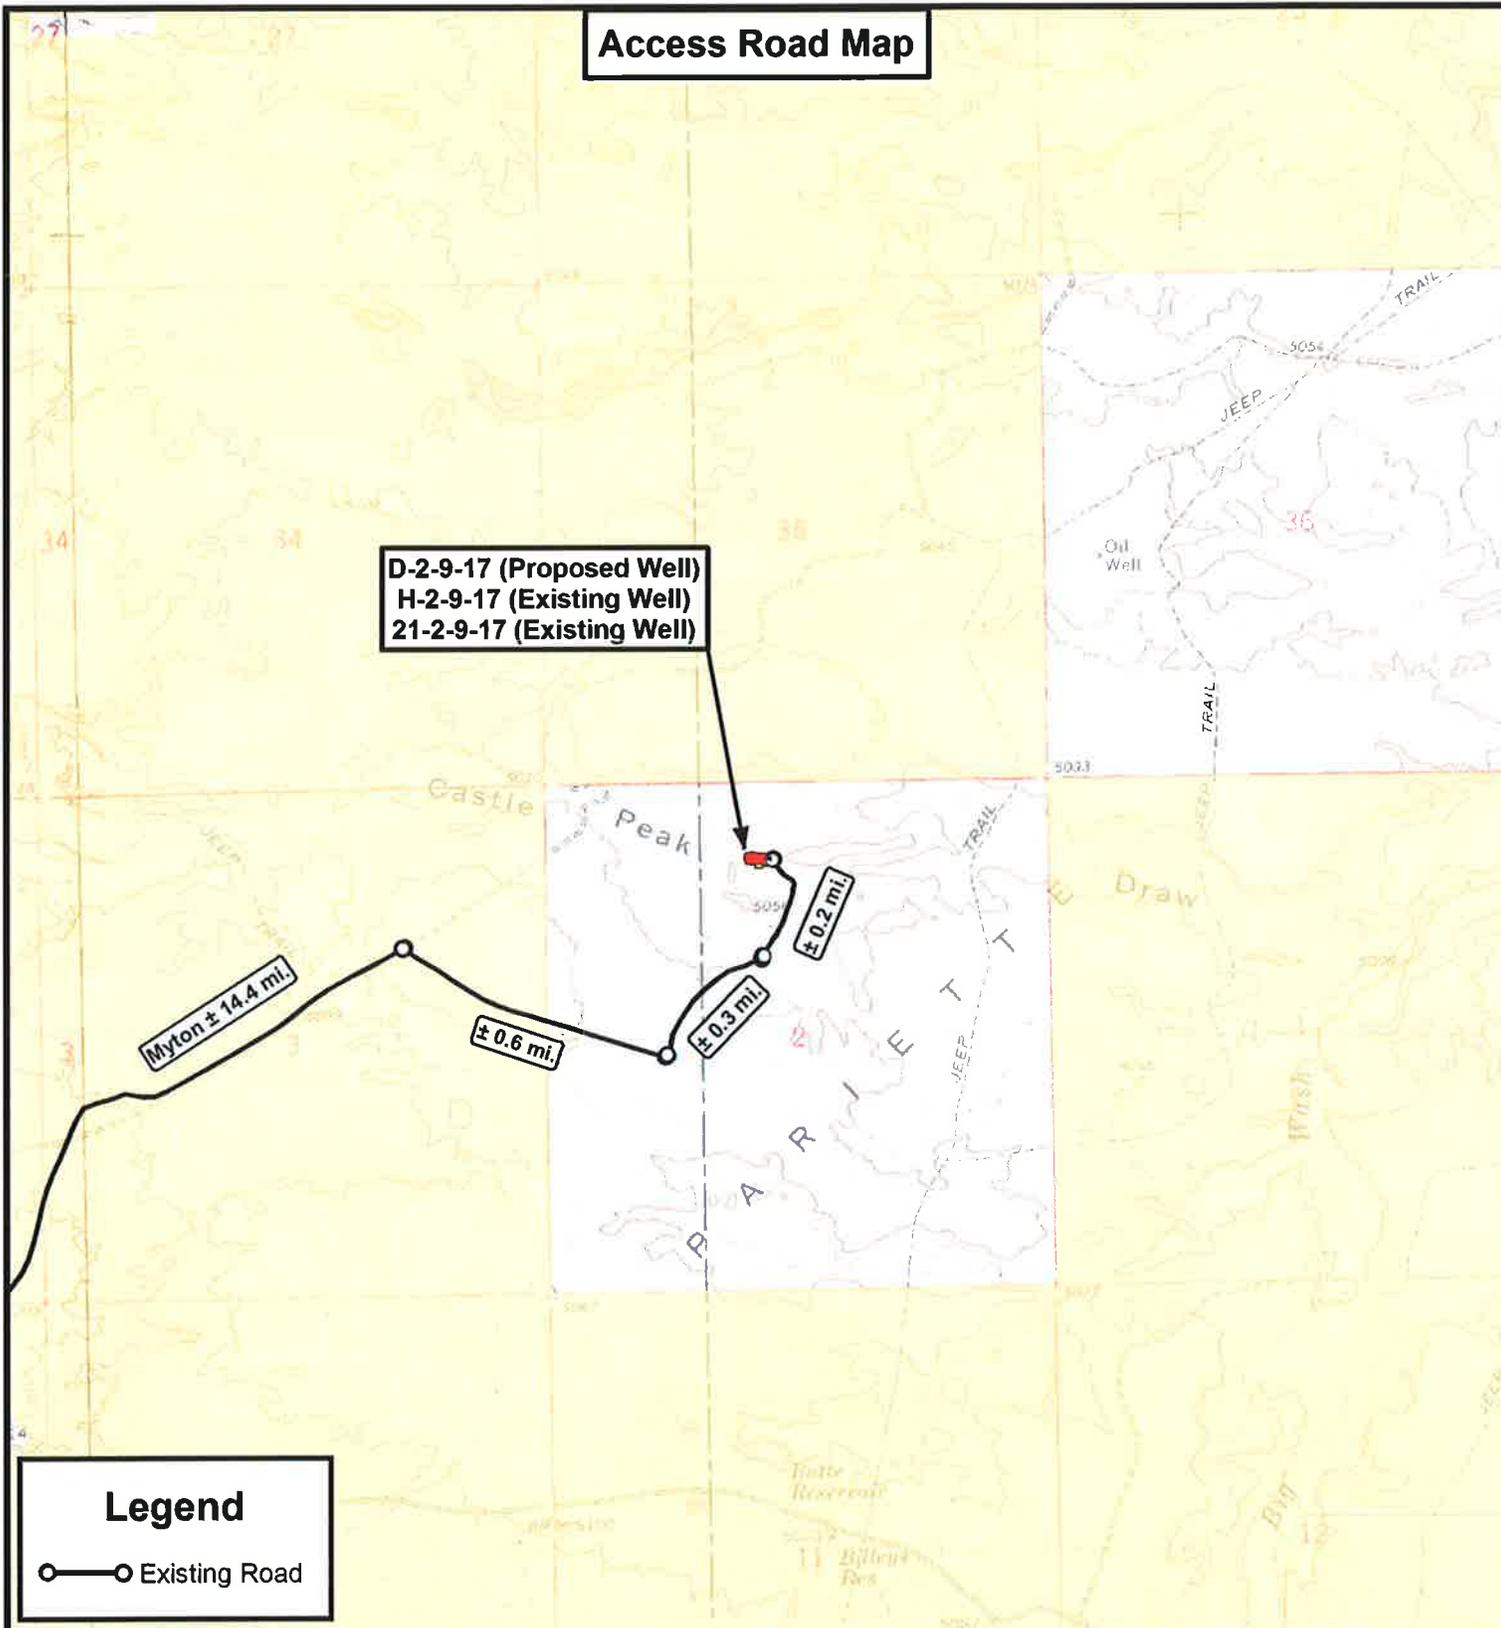

**D-2-9-17 (Proposed Well)**  
**H-2-9-17 (Existing Well)**  
**21-2-9-17 (Existing Well)**

Myton ± 14.4 mi.

± 0.6 mi.

± 0.3 mi.

± 0.2 mi.

**Legend**

○—○ Existing Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

**Tri State Land Surveying, Inc.**  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
 F: (435) 781-2518



**NEWFIELD EXPLORATION COMPANY**

D-2-9-17 (Proposed Well)  
 H-2-9-17 (Existing Well)  
 21-2-9-17 (Existing Well)


SEC. 2, T9S, R17E, S.L.B.&M. Uintah County, UT.

DRAWN BY:	J.A.S.	REVISED:	VERSION:
DATE:	03-23-2011		V1
SCALE:	1" = 2,000'		

**TOPOGRAPHIC MAP**

SHEET **B**

**Proposed Pipeline Map**

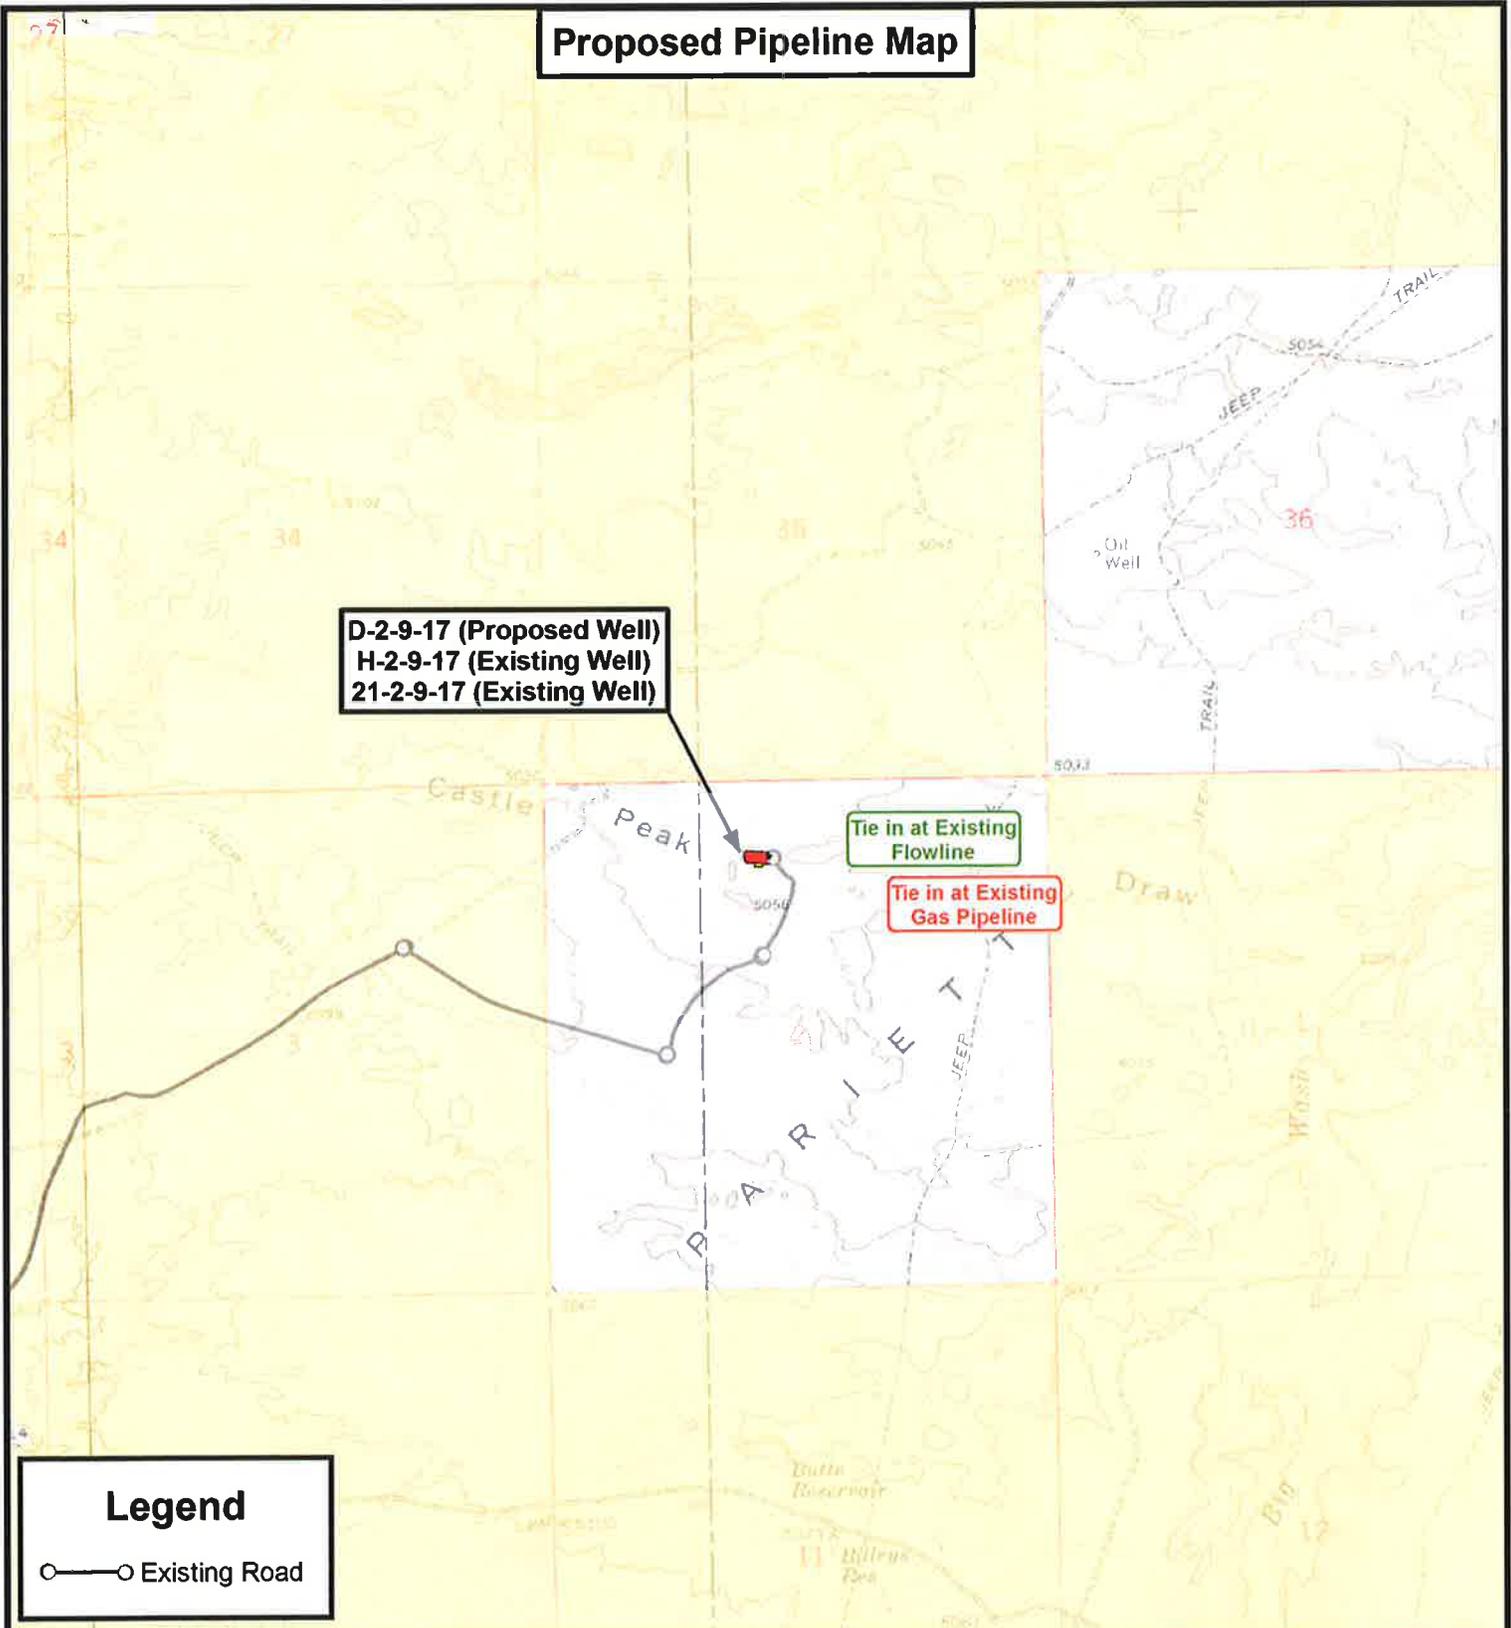

**D-2-9-17 (Proposed Well)**  
**H-2-9-17 (Existing Well)**  
**21-2-9-17 (Existing Well)**

Tie in at Existing Flowline

Tie in at Existing Gas Pipeline

**Legend**

○—○ Existing Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

**Tri State Land Surveying, Inc.**  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
 F: (435) 781-2518



**NEWFIELD EXPLORATION COMPANY**


D-2-9-17 (Proposed Well)  
 H-2-9-17 (Existing Well)  
 21-2-9-17 (Existing Well)

SEC. 2, T9S, R17E, S.L.B.&M. Uintah County, UT.

DRAWN BY:	J.A.S.	REVISED:	VERSION:
DATE:	03-23-2011		V1
SCALE:	1" = 2,000'		


**TOPOGRAPHIC MAP**

SHEET **C**

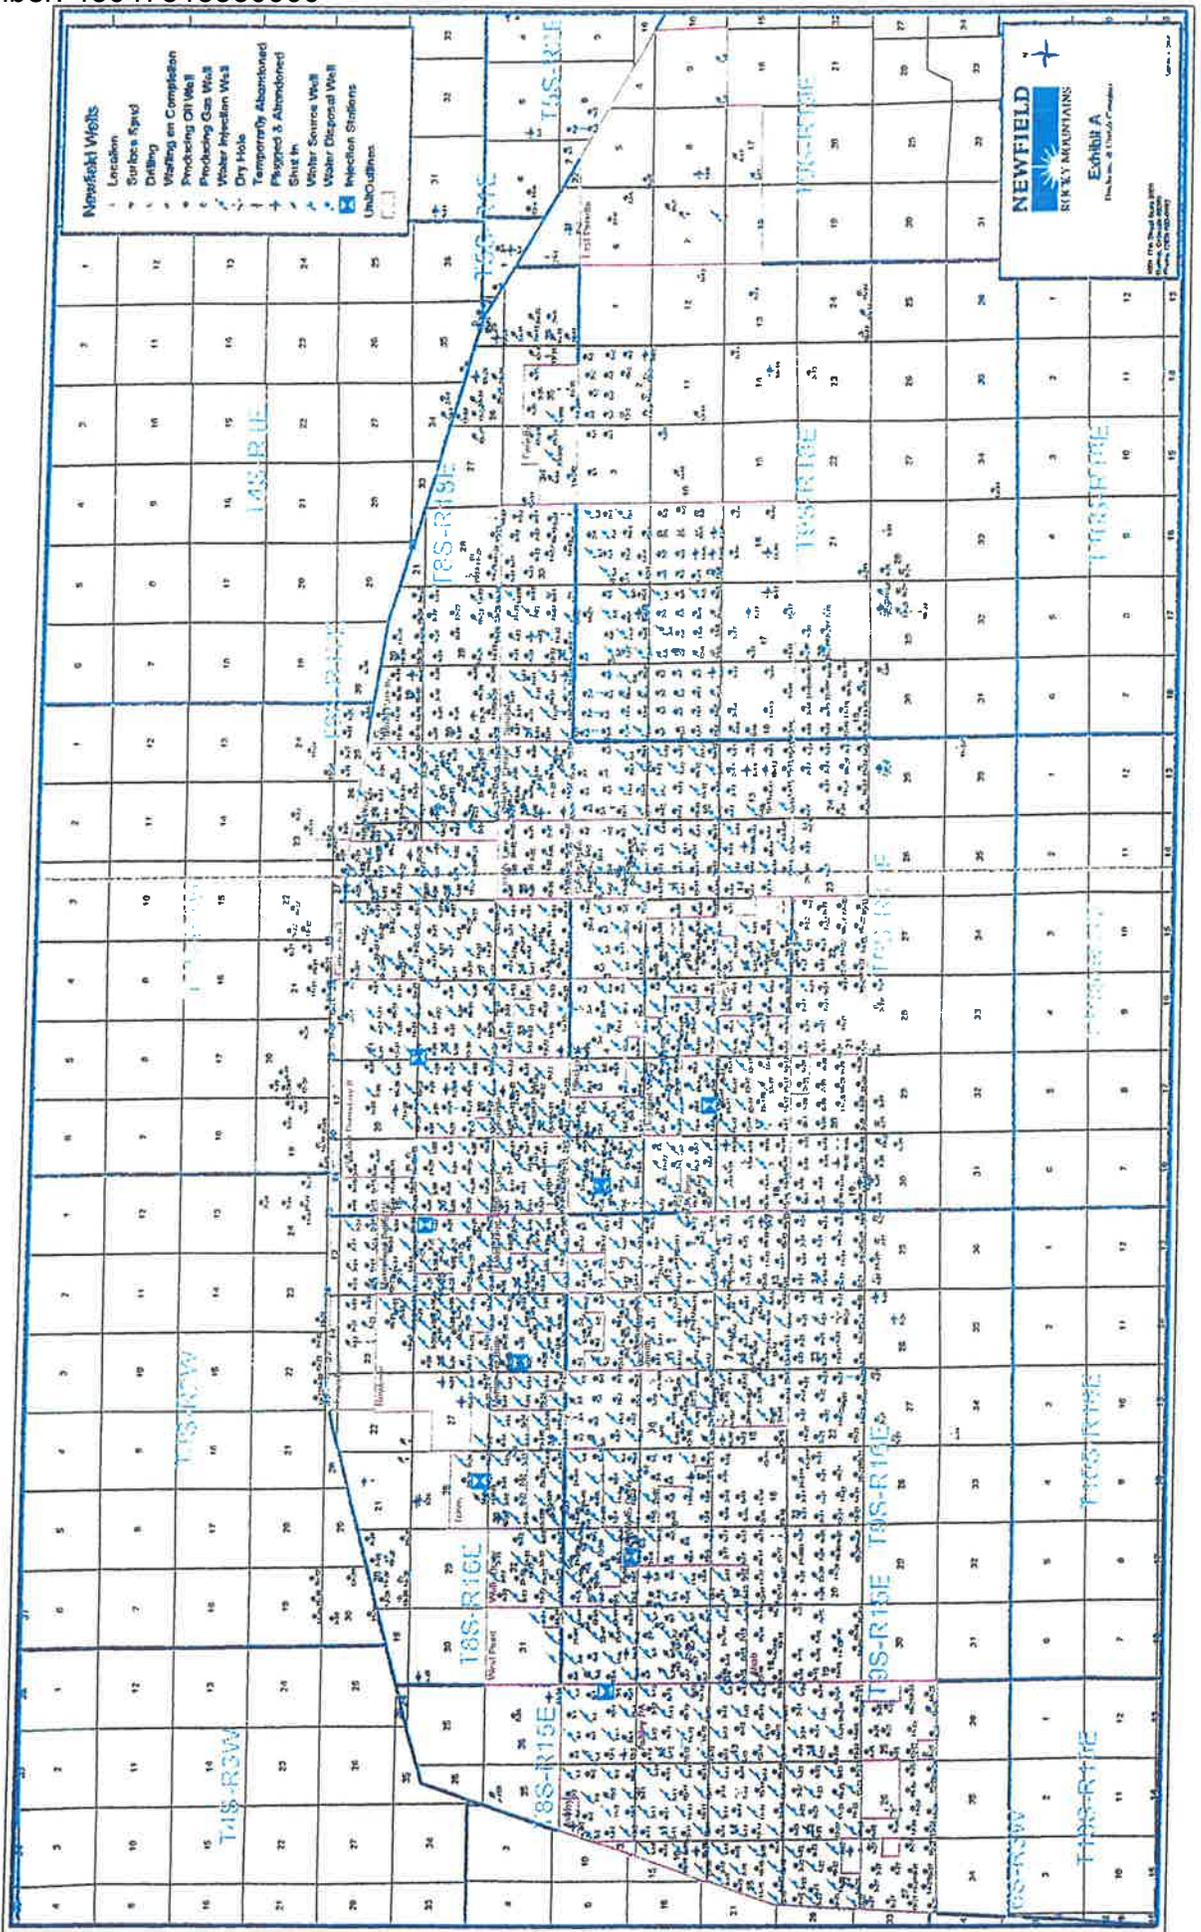

**Exhibit "B" Map**

D-2-9-17 (Proposed Well)  
 H-2-9-17 (Existing Well)  
 21-2-9-17 (Existing Well)

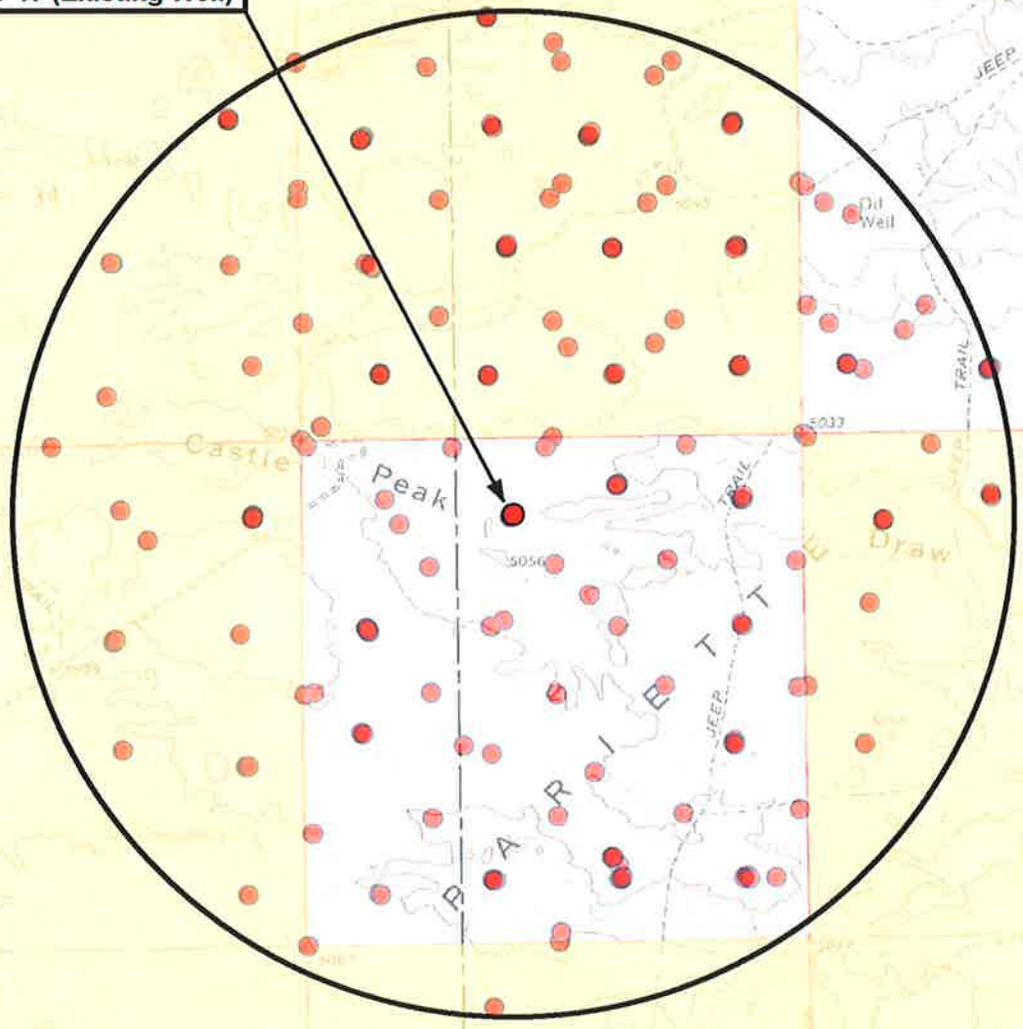

**Legend**

- 1 Mile Radius
- Proposed Location



**Tri State**  
**Land Surveying, Inc.**  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
 F: (435) 781-2518

DRAWN BY:	J.A.S.	REVISED:	VERSION:
DATE:	03-23-2011		V1
SCALE:	1" = 2,010'		



**NEWFIELD EXPLORATION COMPANY**

D-2-9-17 (Proposed Well)  
 H-2-9-17 (Existing Well)  
 21-2-9-17 (Existing Well)  
 SEC. 2, T9S, R17E, S.L.B.&M. Uintah County, UT.

**TOPOGRAPHIC MAP**

SHEET **D**



# **NEWFIELD EXPLORATION**

**USGS Myton SW (UT)  
SECTION 2 T9S, R17E  
D-2-9-17**

**Wellbore #1**

**Plan: Design #1**

## **Standard Planning Report**

**03 July, 2011**





<b>Database:</b>	EDM 2003.21 Single User Db	<b>Local Co-ordinate Reference:</b>	Well D-2-9-17
<b>Company:</b>	NEWFIELD EXPLORATION	<b>TVD Reference:</b>	D-2-9-17 @ 5031.0ft (Newfield Rig)
<b>Project:</b>	USGS Myton SW (UT)	<b>MD Reference:</b>	D-2-9-17 @ 5031.0ft (Newfield Rig)
<b>Site:</b>	SECTION 2 T9S, R17E	<b>North Reference:</b>	True
<b>Well:</b>	D-2-9-17	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Design #1		

<b>Project</b>	USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA		
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	North American Datum 1983		
<b>Map Zone:</b>	Utah Central Zone		

<b>Site</b>	SECTION 2 T9S, R17E, SEC 2 T9S, R17E				
<b>Site Position:</b>		<b>Northing:</b>	7,194,800.00 ft	<b>Latitude:</b>	40° 3' 41.746 N
<b>From:</b>	Lat/Long	<b>Easting:</b>	2,067,293.09 ft	<b>Longitude:</b>	109° 58' 29.067 W
<b>Position Uncertainty:</b>	0.0 ft	<b>Slot Radius:</b>	"	<b>Grid Convergence:</b>	0.98 °

<b>Well</b>	D-2-9-17, SHL LAT: 40 03 54.06 LONG: -109 58 31.15					
<b>Well Position</b>	<b>+N/-S</b>	1,246.0 ft	<b>Northing:</b>	7,196,043.05 ft	<b>Latitude:</b>	40° 3' 54.060 N
	<b>+E/-W</b>	-161.9 ft	<b>Easting:</b>	2,067,109.95 ft	<b>Longitude:</b>	109° 58' 31.150 W
<b>Position Uncertainty</b>		0.0 ft	<b>Wellhead Elevation:</b>	5,031.0 ft	<b>Ground Level:</b>	5,019.0 ft

<b>Wellbore</b>	Wellbore #1				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF2010	2011/04/06	11.31	65.83	52,317

<b>Design</b>	Design #1			
<b>Audit Notes:</b>				
<b>Version:</b>	<b>Phase:</b>	PROTOTYPE	<b>Tie On Depth:</b>	0.0
<b>Vertical Section:</b>	<b>Depth From (TVD) (ft)</b>	<b>+N/-S (ft)</b>	<b>+E/-W (ft)</b>	<b>Direction (°)</b>
	0.0	0.0	0.0	317.14

<b>Plan Sections</b>										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,282.1	10.23	317.14	1,278.5	44.5	-41.3	1.50	1.50	0.00	317.14	
6,334.0	10.23	317.14	6,250.0	702.3	-651.7	0.00	0.00	0.00	0.00	D-2-9-17 TGT



<b>Database:</b>	EDM 2003.21 Single User Db	<b>Local Co-ordinate Reference:</b>	Well D-2-9-17
<b>Company:</b>	NEWFIELD EXPLORATION	<b>TVD Reference:</b>	D-2-9-17 @ 5031.0ft (Newfield Rig)
<b>Project:</b>	USGS Myton SW (UT)	<b>MD Reference:</b>	D-2-9-17 @ 5031.0ft (Newfield Rig)
<b>Site:</b>	SECTION 2 T9S, R17E	<b>North Reference:</b>	True
<b>Well:</b>	D-2-9-17	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	1.50	317.14	700.0	1.0	-0.9	1.3	1.50	1.50	0.00
800.0	3.00	317.14	799.9	3.8	-3.6	5.2	1.50	1.50	0.00
900.0	4.50	317.14	899.7	8.6	-8.0	11.8	1.50	1.50	0.00
1,000.0	6.00	317.14	999.3	15.3	-14.2	20.9	1.50	1.50	0.00
1,100.0	7.50	317.14	1,098.6	24.0	-22.2	32.7	1.50	1.50	0.00
1,200.0	9.00	317.14	1,197.5	34.5	-32.0	47.0	1.50	1.50	0.00
1,282.1	10.23	317.14	1,278.5	44.5	-41.3	60.7	1.50	1.50	0.00
1,300.0	10.23	317.14	1,296.1	46.9	-43.5	63.9	0.00	0.00	0.00
1,400.0	10.23	317.14	1,394.5	59.9	-55.6	81.7	0.00	0.00	0.00
1,500.0	10.23	317.14	1,492.9	72.9	-67.6	99.4	0.00	0.00	0.00
1,600.0	10.23	317.14	1,591.3	85.9	-79.7	117.2	0.00	0.00	0.00
1,700.0	10.23	317.14	1,689.7	98.9	-91.8	135.0	0.00	0.00	0.00
1,800.0	10.23	317.14	1,788.1	112.0	-103.9	152.7	0.00	0.00	0.00
1,900.0	10.23	317.14	1,886.6	125.0	-116.0	170.5	0.00	0.00	0.00
2,000.0	10.23	317.14	1,985.0	138.0	-128.1	188.3	0.00	0.00	0.00
2,100.0	10.23	317.14	2,083.4	151.0	-140.1	206.0	0.00	0.00	0.00
2,200.0	10.23	317.14	2,181.8	164.0	-152.2	223.8	0.00	0.00	0.00
2,300.0	10.23	317.14	2,280.2	177.1	-164.3	241.6	0.00	0.00	0.00
2,400.0	10.23	317.14	2,378.6	190.1	-176.4	259.3	0.00	0.00	0.00
2,500.0	10.23	317.14	2,477.0	203.1	-188.5	277.1	0.00	0.00	0.00
2,600.0	10.23	317.14	2,575.4	216.1	-200.6	294.8	0.00	0.00	0.00
2,700.0	10.23	317.14	2,673.8	229.1	-212.6	312.6	0.00	0.00	0.00
2,800.0	10.23	317.14	2,772.2	242.2	-224.7	330.4	0.00	0.00	0.00
2,900.0	10.23	317.14	2,870.7	255.2	-236.8	348.1	0.00	0.00	0.00
3,000.0	10.23	317.14	2,969.1	268.2	-248.9	365.9	0.00	0.00	0.00
3,100.0	10.23	317.14	3,067.5	281.2	-261.0	383.7	0.00	0.00	0.00
3,200.0	10.23	317.14	3,165.9	294.2	-273.0	401.4	0.00	0.00	0.00
3,300.0	10.23	317.14	3,264.3	307.3	-285.1	419.2	0.00	0.00	0.00
3,400.0	10.23	317.14	3,362.7	320.3	-297.2	436.9	0.00	0.00	0.00
3,500.0	10.23	317.14	3,461.1	333.3	-309.3	454.7	0.00	0.00	0.00
3,600.0	10.23	317.14	3,559.5	346.3	-321.4	472.5	0.00	0.00	0.00
3,700.0	10.23	317.14	3,657.9	359.4	-333.5	490.2	0.00	0.00	0.00
3,800.0	10.23	317.14	3,756.3	372.4	-345.5	508.0	0.00	0.00	0.00
3,900.0	10.23	317.14	3,854.7	385.4	-357.6	525.8	0.00	0.00	0.00
4,000.0	10.23	317.14	3,953.2	398.4	-369.7	543.5	0.00	0.00	0.00
4,100.0	10.23	317.14	4,051.6	411.4	-381.8	561.3	0.00	0.00	0.00
4,200.0	10.23	317.14	4,150.0	424.5	-393.9	579.1	0.00	0.00	0.00
4,300.0	10.23	317.14	4,248.4	437.5	-406.0	596.8	0.00	0.00	0.00
4,400.0	10.23	317.14	4,346.8	450.5	-418.0	614.6	0.00	0.00	0.00
4,500.0	10.23	317.14	4,445.2	463.5	-430.1	632.3	0.00	0.00	0.00
4,600.0	10.23	317.14	4,543.6	476.5	-442.2	650.1	0.00	0.00	0.00
4,700.0	10.23	317.14	4,642.0	489.6	-454.3	667.9	0.00	0.00	0.00
4,800.0	10.23	317.14	4,740.4	502.6	-466.4	685.6	0.00	0.00	0.00
4,900.0	10.23	317.14	4,838.8	515.6	-478.5	703.4	0.00	0.00	0.00
5,000.0	10.23	317.14	4,937.3	528.6	-490.5	721.2	0.00	0.00	0.00
5,100.0	10.23	317.14	5,035.7	541.6	-502.6	738.9	0.00	0.00	0.00
5,200.0	10.23	317.14	5,134.1	554.7	-514.7	756.7	0.00	0.00	0.00



<b>Database:</b>	EDM 2003.21 Single User Db	<b>Local Co-ordinate Reference:</b>	Well D-2-9-17
<b>Company:</b>	NEWFIELD EXPLORATION	<b>TVD Reference:</b>	D-2-9-17 @ 5031.0ft (Newfield Rig)
<b>Project:</b>	USGS Myton SW (UT)	<b>MD Reference:</b>	D-2-9-17 @ 5031.0ft (Newfield Rig)
<b>Site:</b>	SECTION 2 T9S, R17E	<b>North Reference:</b>	True
<b>Well:</b>	D-2-9-17	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,300.0	10.23	317.14	5,232.5	567.7	-526.8	774.4	0.00	0.00	0.00
5,400.0	10.23	317.14	5,330.9	580.7	-538.9	792.2	0.00	0.00	0.00
5,500.0	10.23	317.14	5,429.3	593.7	-551.0	810.0	0.00	0.00	0.00
5,600.0	10.23	317.14	5,527.7	606.7	-563.0	827.7	0.00	0.00	0.00
5,700.0	10.23	317.14	5,626.1	619.8	-575.1	845.5	0.00	0.00	0.00
5,800.0	10.23	317.14	5,724.5	632.8	-587.2	863.3	0.00	0.00	0.00
5,900.0	10.23	317.14	5,822.9	645.8	-599.3	881.0	0.00	0.00	0.00
6,000.0	10.23	317.14	5,921.4	658.8	-611.4	898.8	0.00	0.00	0.00
6,100.0	10.23	317.14	6,019.8	671.8	-623.4	916.6	0.00	0.00	0.00
6,200.0	10.23	317.14	6,118.2	684.9	-635.5	934.3	0.00	0.00	0.00
6,300.0	10.23	317.14	6,216.6	697.9	-647.6	952.1	0.00	0.00	0.00
6,334.0	10.23	317.14	6,250.0	702.3	-651.7	958.1	0.00	0.00	0.00





Project: USGS Myton SW (UT)  
 Site: SECTION 2 T9S, R17E  
 Well: D-2-9-17  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.30°

Magnetic Field  
 Strength: 52316.5snT  
 Dip Angle: 65.83°  
 Date: 2011/04/06  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100  
 TARGET RADIUS IS 75'

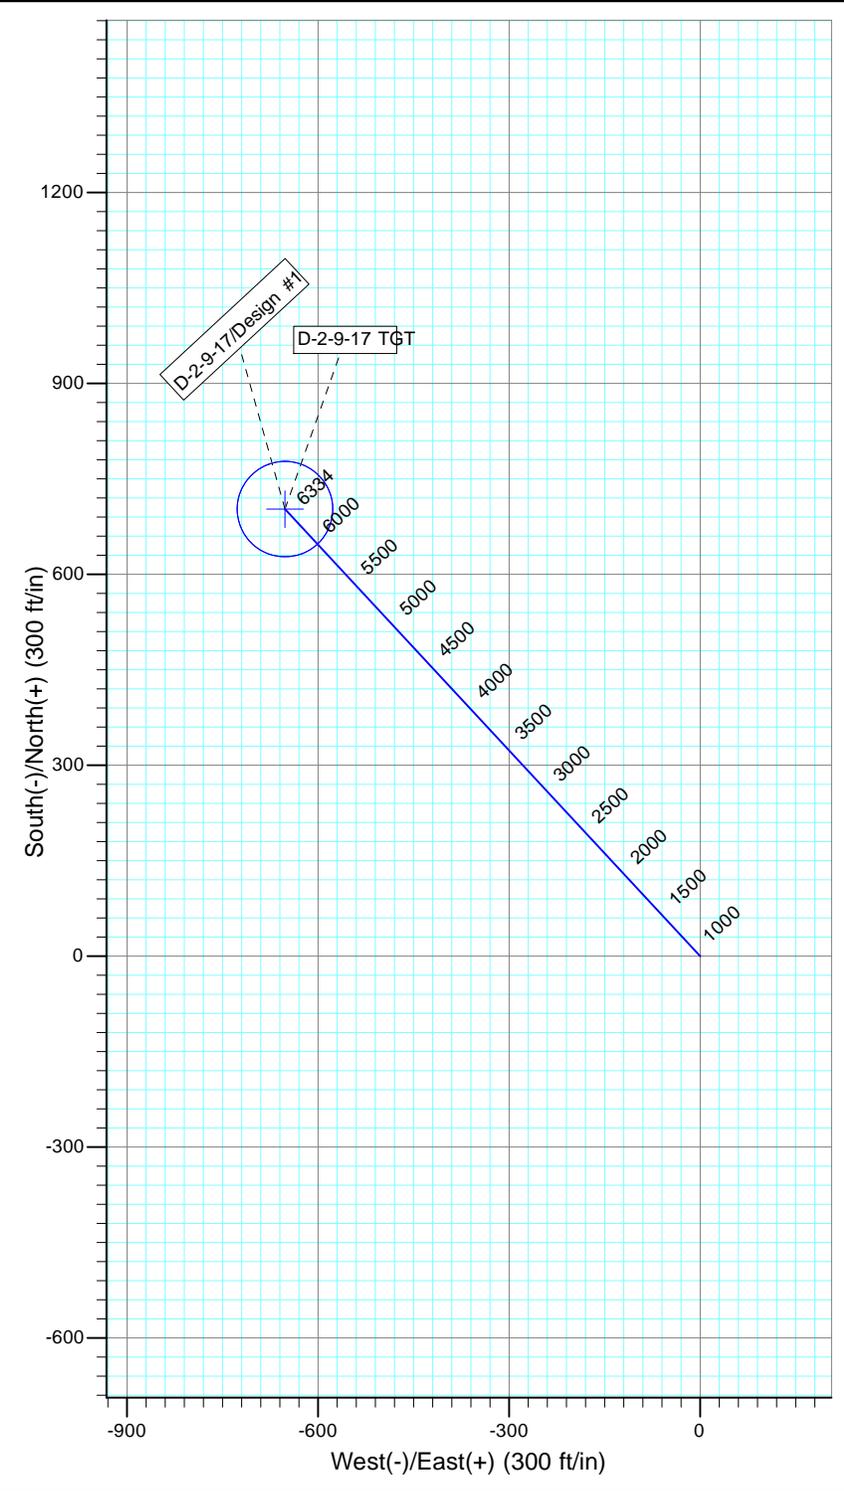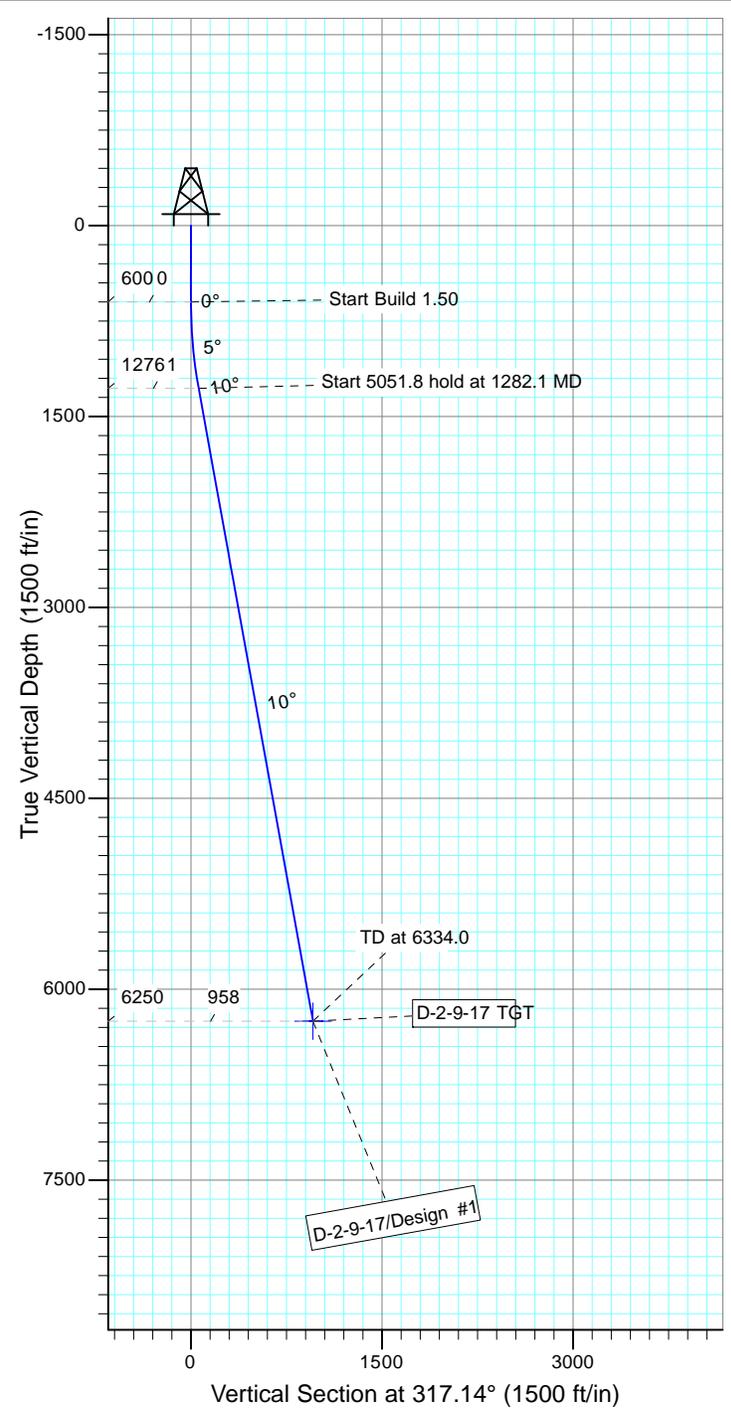

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
D-2-9-17 TGT	6250.0	702.3	-651.7	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1282.1	10.23	317.14	1278.5	44.5	-41.3	1.50	317.14	60.7	
4	6334.0	10.23	317.14	6250.0	702.3	-651.7	0.00	0.00	958.1	D-2-9-17 TGT



**NEWFIELD PRODUCTION COMPANY  
GMBU D-2-9-17  
AT SURFACE: NE/NW SECTION 2, T9S, R17E  
UINTAH COUNTY, UTAH**

**ONSHORE ORDER NO. 1**

**MULTI-POINT SURFACE USE & OPERATIONS PLAN**

**1. EXISTING ROADS**

See attached Topographic Map "A"

To reach Newfield Production Company well location site GMBU D-2-9-17 located in the NE 1/4 NW 1/4 Section 2, T9S, R17E, Uintah County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 - 1.4 miles  $\pm$  to the junction of this highway and UT State Hwy 53; proceed southeasterly - 11.6 miles  $\pm$  to it's junction with an existing road to the northeast; proceed northeasterly - 1.4 miles  $\pm$  to it's junction with an existing road to the southeast; proceed southeasterly - 0.6 miles  $\pm$  to it's junction with an existing road to the northeast; proceed northeasterly - 0.5 miles  $\pm$  to it's junction with the access road to the existing 21-2-9-17 well pad.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

**2. PLANNED ACCESS ROAD**

There is no proposed access road for this location. The proposed well will be drilled directionally off of the existing 21-2-9-17 well pad. See attached **Topographic Map "B"**.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

**3. LOCATION OF EXISTING WELLS**

Refer to Exhibit "B".

**4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District  
Water Right : 43-10136

Maurice Harvey Pond  
Water Right: 47-1358

Neil Moon Pond  
Water Right: 43-11787

Newfield Collector Well  
Water Right: 47-1817 (A30414DVA, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site.

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

8. ANCILLARY FACILITIES

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. WELL SITE LAYOUT

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. PLANS FOR RESTORATION OF SURFACE:

- a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

- b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. SURFACE OWNERSHIP – State of Utah.

11. OTHER ADDITIONAL INFORMATION:

- a) Newfield Production Company is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, Newfield is to immediately stop work that might further disturb such materials and contact the Authorized Officer.
- b) Newfield Production will control noxious weeds along rights-of-way for roads, pipelines, well sites or other applicable facilities. On State administered land it is required that a Pesticide Use Proposal shall be submitted and given approval prior to the application of herbicides or other possible hazardous chemicals.
- c) Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on State Lands after the conclusion of drilling operations or at any other time without State authorization. However, if State authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

**Water Disposal**

After first production, if the production water meets quality guidelines, it will be transported to the Ashley, Monument Butte, Jonah, South Wells Draw and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project. Water not meeting quality criteria, will be disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), Federally approved surface disposal facilities or at a State of Utah approved surface disposal facilities.

**Additional Surface Stipulations**

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

**Hazardous Material Declaration**

Newfield Production Company guarantees that during the drilling and completion of the GMBU D-2-9-17, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the GMBU D-2-9-17, Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

Representative

Name: Tim Eaton  
Address: Newfield Production Company  
Route 3, Box 3630  
Myton, UT 84052  
Telephone: (435) 646-3721

Certification

Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #D-2-9-17, Section 2, Township 9S, Range 17E: Lease ML-45555 Uintah County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, Federal Bond #B001834.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

4/7/11  
Date

  
Mandie Crozier  
Regulatory Specialist  
Newfield Production Company



# NEWFIELD EXPLORATION COMPANY

## WELL PAD INTERFERENCE PLAT

- D-2-9-17 (Proposed Well)
- H-2-9-17 (Existing Well)
- 21-2-9-17 (Existing Well)

Pad Location: NENW (LOT 3) Section 2, T9S, R17E, S.L.B.&M.




### TOP HOLE FOOTAGES

D-2-9-17 (PROPOSED)  
809' FNL & 2225' FWL

### BOTTOM HOLE FOOTAGES

D-2-9-17 (PROPOSED)  
100' FNL & 1585' FWL

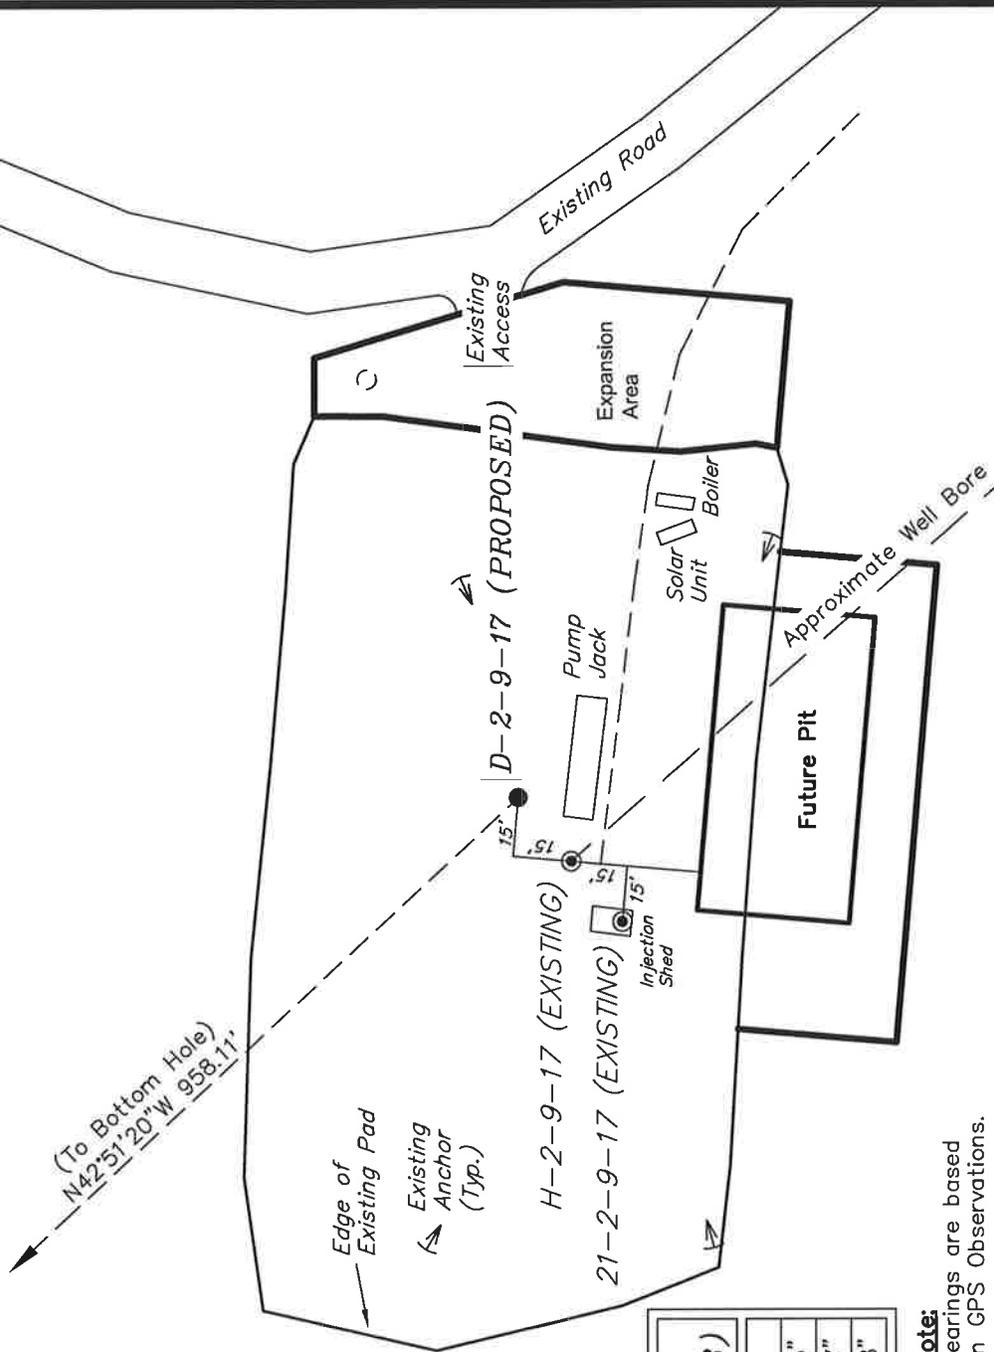

LATITUDE & LONGITUDE Surface position of Wells (NAD 83)		
WELL	LATITUDE	LONGITUDE
D-2-9-17	40° 03' 54.06"	109° 58' 31.15"
H-2-9-17	40° 03' 53.92"	109° 58' 31.37"
21-2-9-17	40° 03' 53.79"	109° 58' 31.58"

RELATIVE COORDINATES From Top Hole to C.O.P.		
WELL	NORTH	EAST
D-2-9-17	702'	-652'

**Note:**  
Bearings are based on GPS Observations.

SURVEYED BY: K.S.	DATE SURVEYED: 03-07-11	VERSION: V1
DRAWN BY: F.T.M.	DATE DRAWN: 03-18-11	
SCALE: 1" = 50'	REVISED:	



**Tri State Land Surveying, Inc.**  
 (435) 781-2501  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

# NEWFIELD EXPLORATION COMPANY

## LOCATION LAYOUT

- D-2-9-17 (Proposed Well)
- H-2-9-17 (Existing Well)
- 21-2-9-17 (Existing Well)

Pad Location: NENW (LOT 3) Section 2, T9S, R17E, S.L.B.&M.

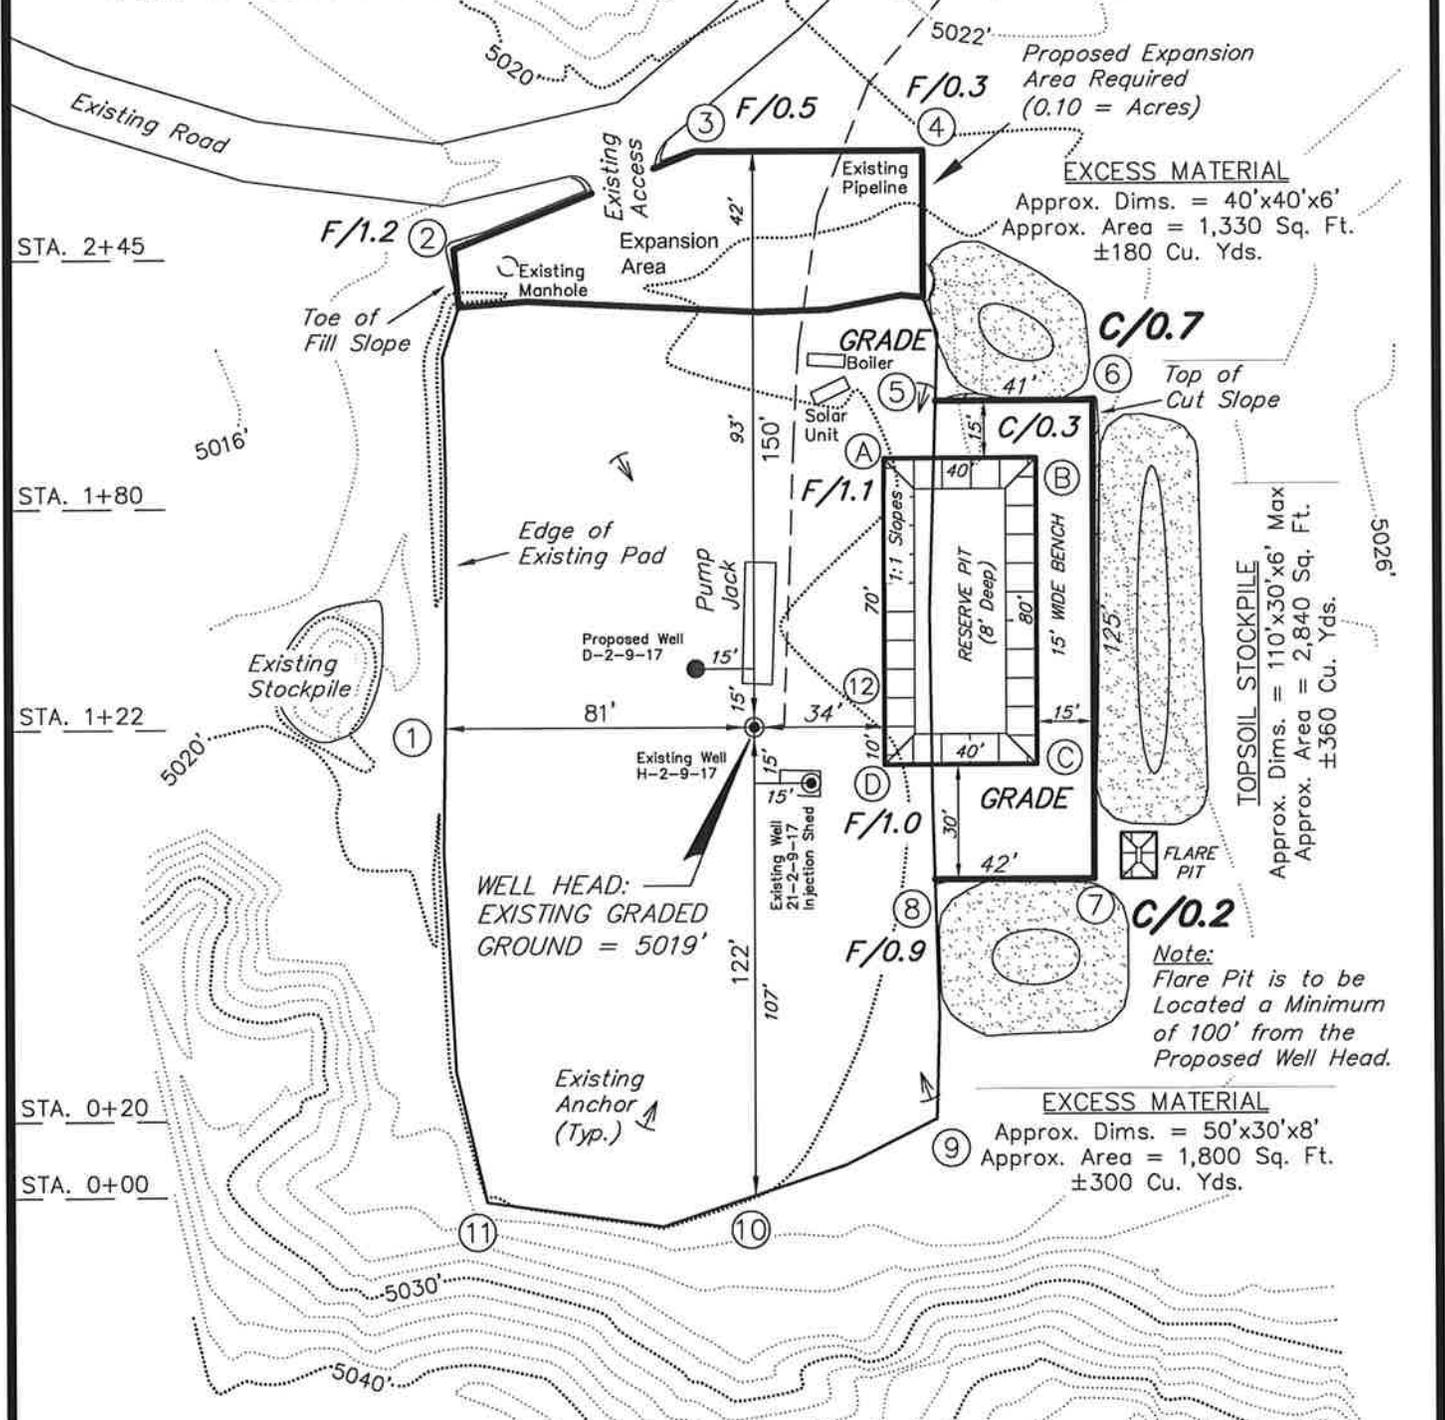

**NOTE:**  
The topsoil, excess material & temporary cuttings areas are calculated as being mounds containing 840 cubic yards of dirt (a 10% fluff factor is included). The mound areas are calculated with push slopes of 1.5:1 & fall slopes of 1.5:1.

**Note:**  
Topsoil to be Stripped From All New Construction Areas and Proposed Stock Pile Locations

SURVEYED BY: K.S.	DATE SURVEYED: 03-07-11	VERSION:
DRAWN BY: F.T.M.	DATE DRAWN: 03-21-11	V1
SCALE: 1" = 50'	REVISED:	

(435) 781-2501

**Tri State**  
Land Surveying, Inc.  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

# NEWFIELD EXPLORATION COMPANY





## CROSS SECTIONS

*D-2-9-17 (Proposed Well)*

*H-2-9-17 (Existing Well)*

*21-2-9-17 (Existing Well)*

*Pad Location: NENW (LOT 3) Section 2, T9S, R17E, S.L.B.&M.*

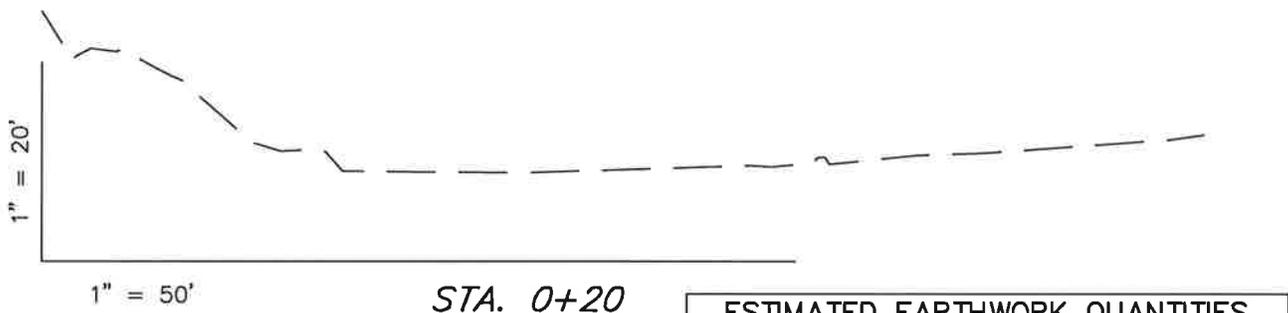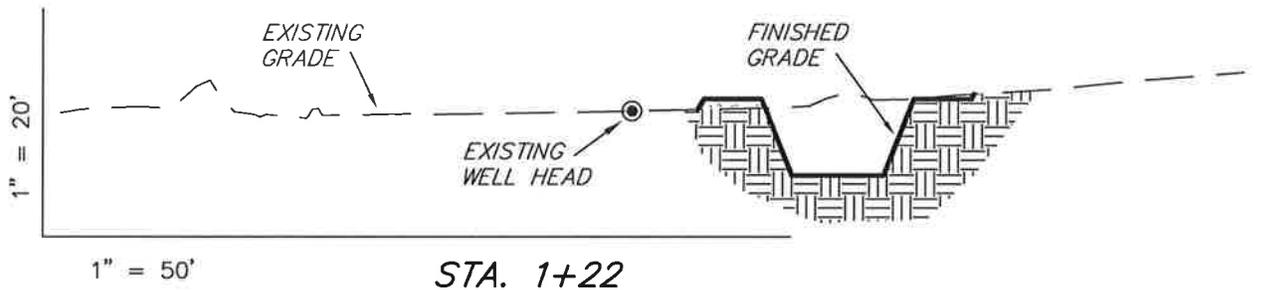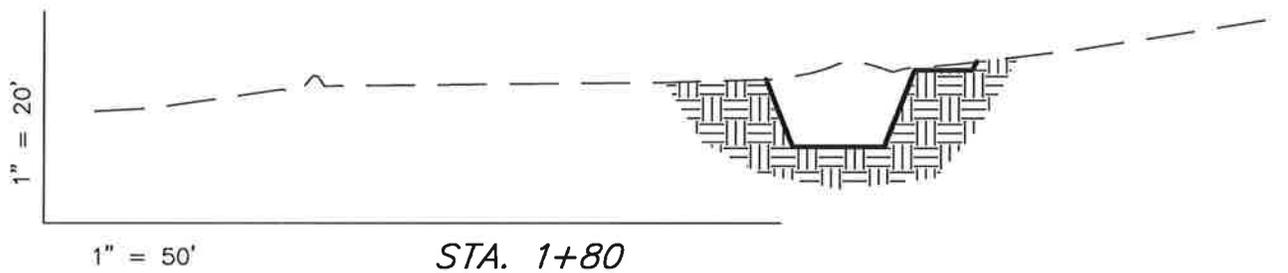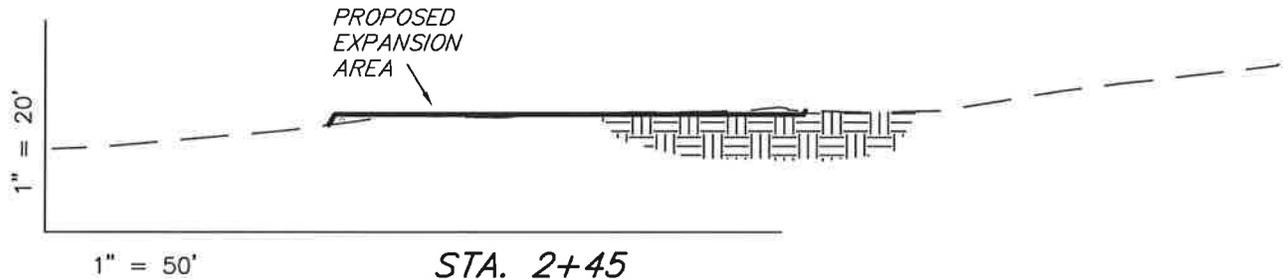

NOTE:  
UNLESS OTHERWISE  
NOTED ALL CUT/FILL  
SLOPES ARE AT 1.5:1

ESTIMATED EARTHWORK QUANTITIES (No Shrink or swell adjustments have been used) (Expressed in Cubic Yards)				
ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	0	130	Topsoil is not included in Pad Cut	-131
PIT	570	0		570
<b>TOTALS</b>	<b>570</b>	<b>130</b>	<b>320</b>	<b>440</b>

SURVEYED BY: K.S.	DATE SURVEYED: 03-07-11	VERSION:
DRAWN BY: F.T.M.	DATE DRAWN: 03-21-11	<b>V1</b>
SCALE: 1" = 50'	REVISED:	

*Tri State* (435) 781-2501  
*Land Surveying, Inc.*  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078





VIA ELECTRONIC DELIVERY

April 11, 2011

State of Utah, Division of Oil, Gas and Mining  
ATTN: Diana Mason  
P.O. Box 145801  
Salt Lake City, UT 84114-5801

RE: Directional Drilling  
**GMBU D-2-9-17**  
Greater Monument Butte (Green River) Unit

Surface Hole: T9S-R17E Section 2: NENW (ML-45555)  
809' FNL 2225' FWL

At Target: T9S-R17E Section 2: NENW (ML-45555)  
100' FNL 1585' FWL

Uintah County, Utah

Dear Ms. Mason:

Pursuant to the filing by Newfield Production Company (NPC) of an Application for Permit to Drill the above referenced well dated 4/7/11, a copy of which is attached, and in accordance with Oil and Gas Conservation Rule R649-3-11, NPC hereby submits this letter as notice of our intention to directionally drill this well.

The surface hole and target locations of this well are both within the boundaries of the Greater Monument Butte Unit (UTU-87538X), of which Newfield certifies that it is the operator. Further, Newfield certifies that all lands within 460 feet of the entire directional well bore are within the Greater Monument Butte Unit.

NPC is permitting this well as a directional well in order to mitigate surface disturbance by utilizing pre-existing roads and pipelines.

NPC hereby requests our application for permit to drill be granted pursuant to R649-3-11. If you have any questions or require further information, please contact the undersigned at 303-383-4197 or by email at [sgillespie@newfield.com](mailto:sgillespie@newfield.com). Your consideration in this matter is greatly appreciated.

Sincerely,  
Newfield Production Company

A handwritten signature in blue ink, appearing to read "Shane Gillespie", is written over a faint, larger version of the same signature.

Shane Gillespie  
Land Associate

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT   
(highlight changes)

<b>APPLICATION FOR PERMIT TO DRILL</b>			5. MINERAL LEASE NO ML-45555	6. SURFACE State
1A. TYPE OF WORK DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>			7. IF INDIAN, ALLOTTEE OR TRIBE NAME NA	
1B. TYPE OF WELL OIL <input checked="" type="checkbox"/> GAS <input type="checkbox"/> OTHER _____ SINGLE ZONE <input checked="" type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>			8. UNIT or CA AGREEMENT NAME Greater Monument Butte	
2. NAME OF OPERATOR Newfield Production Company			9. WELL NAME and NUMBER: GMBU D-2-9-17	
3. ADDRESS OF OPERATOR: Route #3, Box 3630 Myton UT ZIP 84052		PHONE NUMBER: (435) 646-3721	10. FIELD AND POOL, OR WILDCAT Monument Butte	
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: NE/NW 809' FNL 2225' FWL Sec. 2 T9S R17E AT PROPOSED PRODUCING ZONE: NE/NW 100' FNL 1585' FWL Sec. 2 T9S R17E			11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NENW 2 9S 17E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE Approximately 15.5 miles southeast of Myton, Utah			12. COUNTY Uintah	13. STATE UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) Approx. 100' f/lse line, NA' f/unit line	16. NUMBER OF ACRES IN LEASE 640.20 acres	17. NUMBER OF ACRES ASSIGNED TO THIS WELL 20 acres		
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) Approx. 990'	19. PROPOSED DEPTH: 6,405	20. BOND DESCRIPTION: #B001834		
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC): 5019' GL	22. APPROXIMATE DATE WORK WILL START <i>2nd Qtr. 2011</i>	23. ESTIMATED DURATION: (15) days from SPUD to rig release		

**PROPOSED CASING AND CEMENTING PROGRAM**

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT	SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT		
12 1/4"	8 5/8 J-55 24.0	300	Class G w/2% CaCl	155 sx +/-	1.17 15.8
7 7/8"	5 1/2 J-55 15.5	6,405	Lead(Prem Lite II)	275 sx +/-	3.26 11.0
			Tail (50/50 Poz)	450 sx +/-	1.24 14.3

**ATTACHMENTS**

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES

- |  |  |
|--|--|
| <input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER     | <input checked="" type="checkbox"/> COMPLETE DRILLING PLAN                                   |
| <input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER | <input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER |

NAME (PLEASE PRINT) Mandje Crozier TITLE Regulatory Specialist  
SIGNATURE *Mandje Crozier* DATE 4/7/11

(This space for State use only)


API NUMBER ASSIGNED: \_\_\_\_\_ APPROVAL \_\_\_\_\_

# T9S, R17E, S.L.B.&M.

# NEWFIELD EXPLORATION COMPANY

WELL LOCATION, D-2-9-17, LOCATED AS SHOWN IN THE NE 1/4 NW 1/4 (LOT 3) OF SECTION 2, T9S, R17E, S.L.B.&M. UINTAH COUNTY, UTAH.

TARGET BOTTOM HOLE, D-2-9-17, LOCATED AS SHOWN IN THE NE 1/4 NW 1/4 (LOT 3) OF SECTION 2, T9S, R17E, S.L.B.&M. UINTAH COUNTY, UTAH.

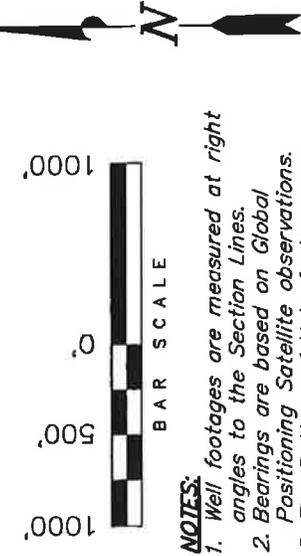


- NOTES:**
1. Well footages are measured at right angles to the Section Lines.
  2. Bearings are based on Global Positioning Satellite observations.
  3. The Bottom of Hole footages are 100' FNL & 1585' FWL.

THIS IS TO CERTIFY THAT THE ABOVE REPORT WAS PREPARED FROM FIELD NOTES OF ACCURATE SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

STACY W. STEWART  
REGISTERED LAND SURVEYOR  
REGISTRATION NO. 88827  
STATE OF UTAH 03-18-11

**TRI STATE LAND SURVEYING & CONSULTING**  
180 NORTH VERNAL AVE. - VERNAL, UTAH 84078  
(435) 781-2501

DATE SURVEYED: 03-07-11	SURVEYED BY: K.S.	VERSION:
DATE DRAWN: 03-18-11	DRAWN BY: F.T.M.	V1
REVISED:	SCALE: 1" = 1000'	

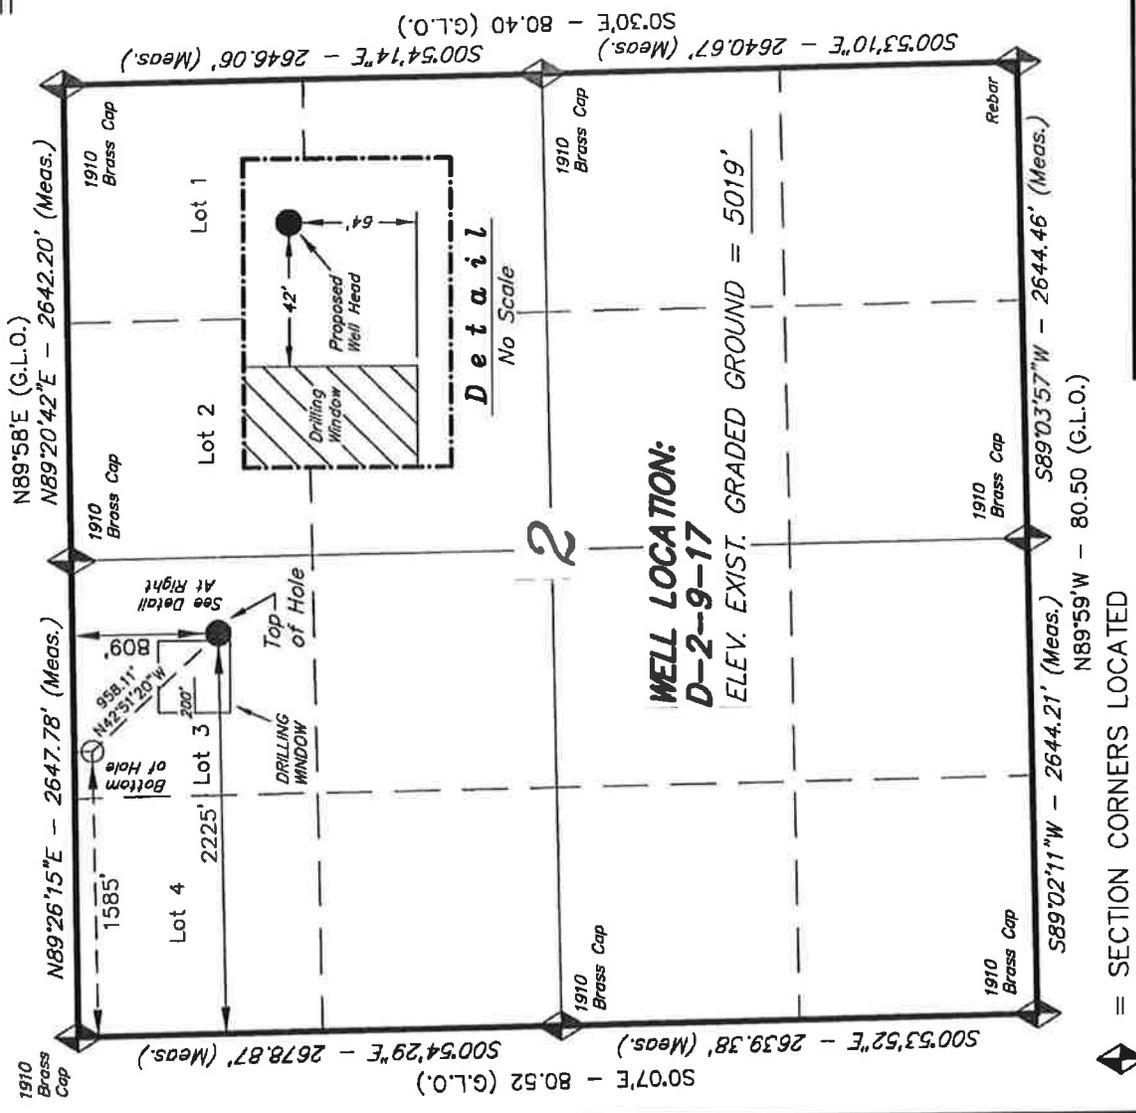


D-2-9-17  
(Surface Location) NAD 83  
LATITUDE = 40° 03' 54.06"  
LONGITUDE = 109° 58' 31.15"

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV; Elevations are based on an N.G.S. OPUS Correction. LOCATION: LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'

**Access Road Map**

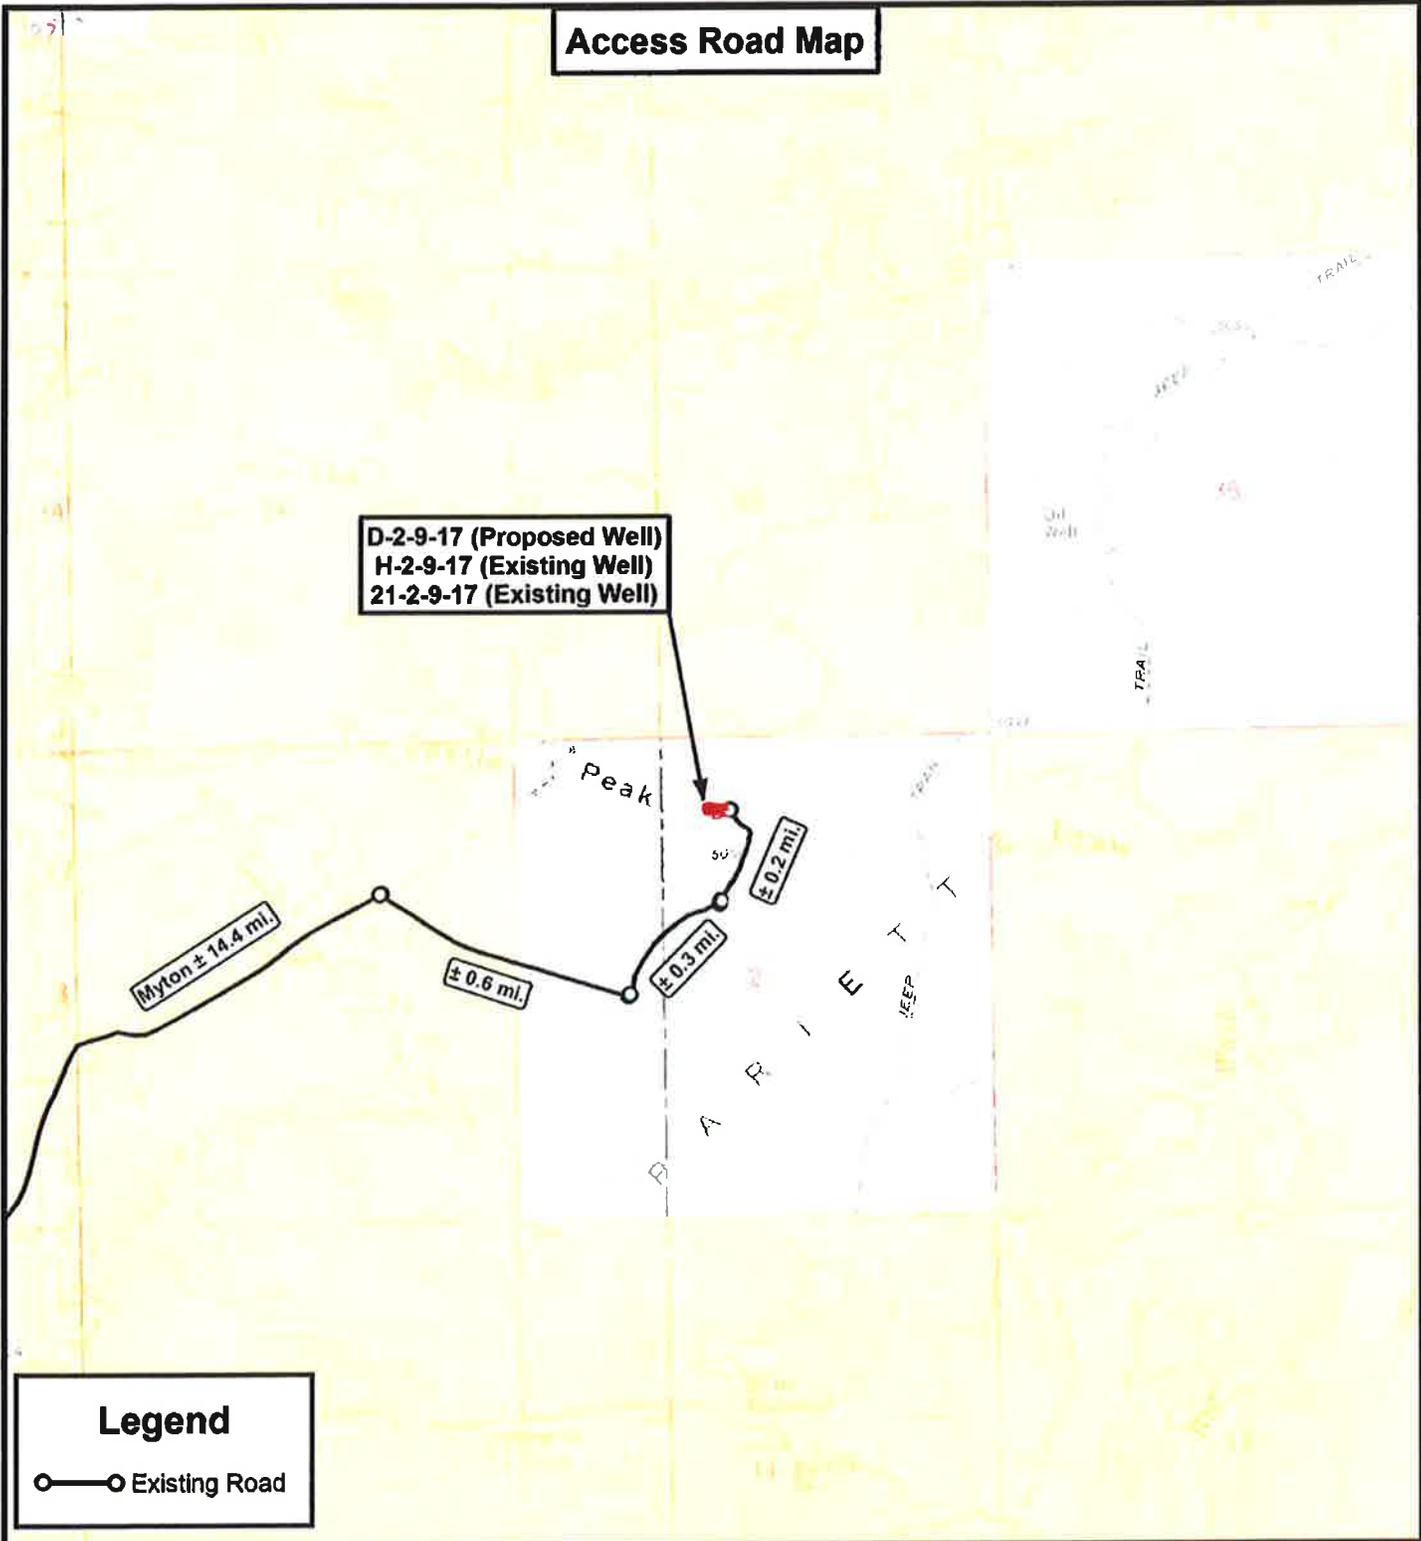

**Legend**

○—○ Existing Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

**Tri State Land Surveying, Inc.**  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
F: (435) 781-2518



**NEWFIELD EXPLORATION COMPANY**

D-2-9-17 (Proposed Well)  
H-2-9-17 (Existing Well)  
21-2-9-17 (Existing Well)  
SEC. 2, T9S, R17E, S.L.B.&M. Uintah County, UT.

DRAWN BY:	J.A.S.	REVISED:	VERSION:
DATE:	03-23-2011		V1
SCALE:	1" = 2,000'		

**TOPOGRAPHIC MAP**

SHEET **B**

# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:  
3160  
(UT-922)

April 11, 2011

Memorandum

To: Assistant District Manager Minerals, Vernal District  
From: Michael Coulthard, Petroleum Engineer  
Subject: 2011 Plan of Development Greater Monument  
Butte Unit, Duchesne and Uintah Counties,  
Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2011 within the Greater Monument Butte Unit, Duchesne and Uintah Counties, Utah.

API#	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-013-50673	GMBU S-2-9-15	Sec 02 T09S R15E 0581 FSL 2018 FEL BHL Sec 02 T09S R15E 1466 FSL 1109 FEL
43-013-50674	GMBU V-2-9-15	Sec 02 T09S R15E 0564 FSL 2031 FEL BHL Sec 02 T09S R15E 0100 FSL 1315 FEL
43-047-51553	GMBU D-2-9-17	Sec 02 T09S R17E 0809 FNL 2225 FWL BHL Sec 02 T09S R17E 0100 FNL 1585 FWL

This office has no objection to permitting the wells at this time.

Michael L. Coulthard

Digitally signed by Michael L. Coulthard  
DN: cn=Michael L. Coulthard, o=Bureau of Land Management,  
ou=Branch of Minerals, email=Michael\_Coulthard@blm.gov, c=US  
Date: 2011.04.11 11:54:22 -06'00'

bcc: File - Greater Monument Butte Unit  
Division of Oil Gas and Mining  
Central Files  
Agr. Sec. Chron  
Fluid Chron

MCoulthard:mc:4-11-11

RECEIVED: Jul. 07, 2011

**NEWFIELD**





Project: USGS Myton SW (UT)  
 Site: SECTION 2 T9, R15  
 Well: S-2-9-15  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to Grid North  
 True North: -0.83°  
 Magnetic North: 10.57°

Magnetic Field  
 Strength: 52277.1snT  
 Dip Angle: 65.78°  
 Date: 2011/03/15  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100'  
 TARGET RADIUS IS 75'

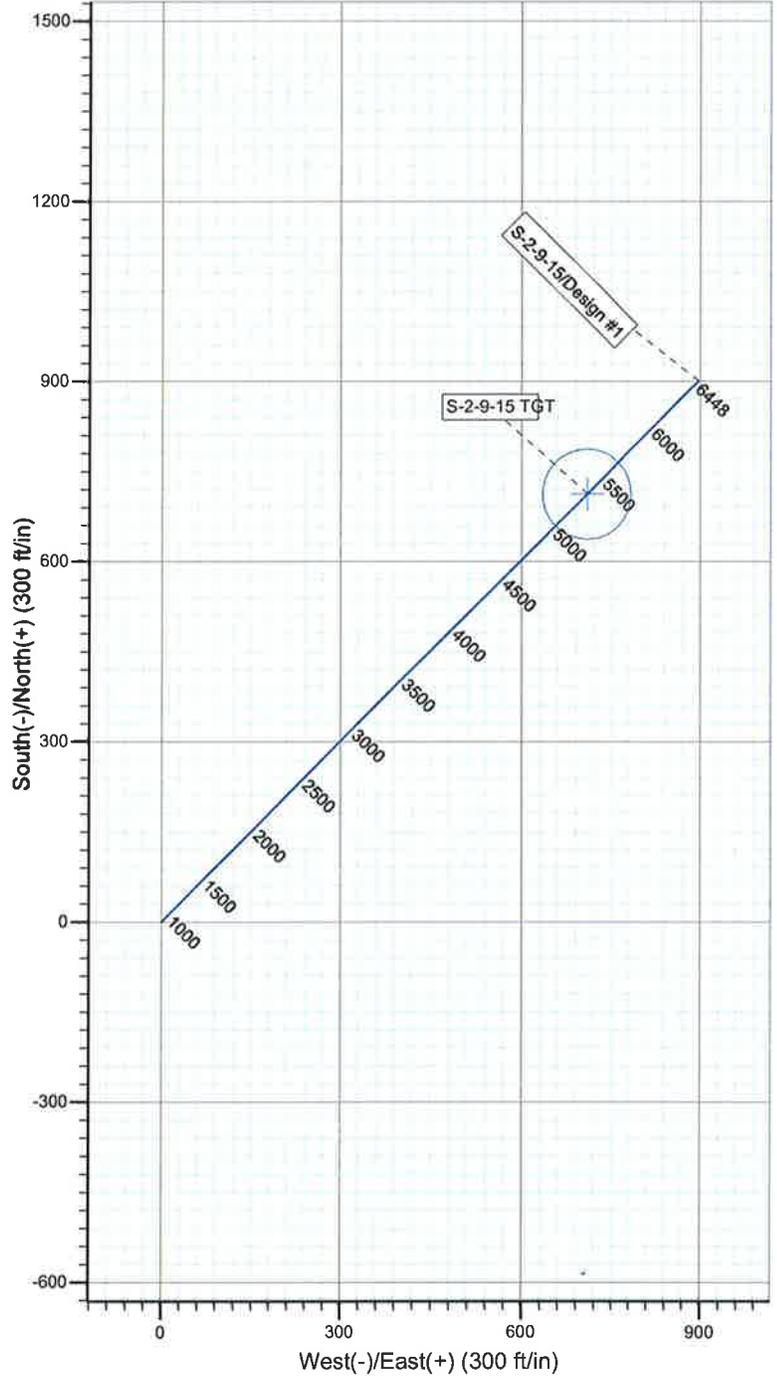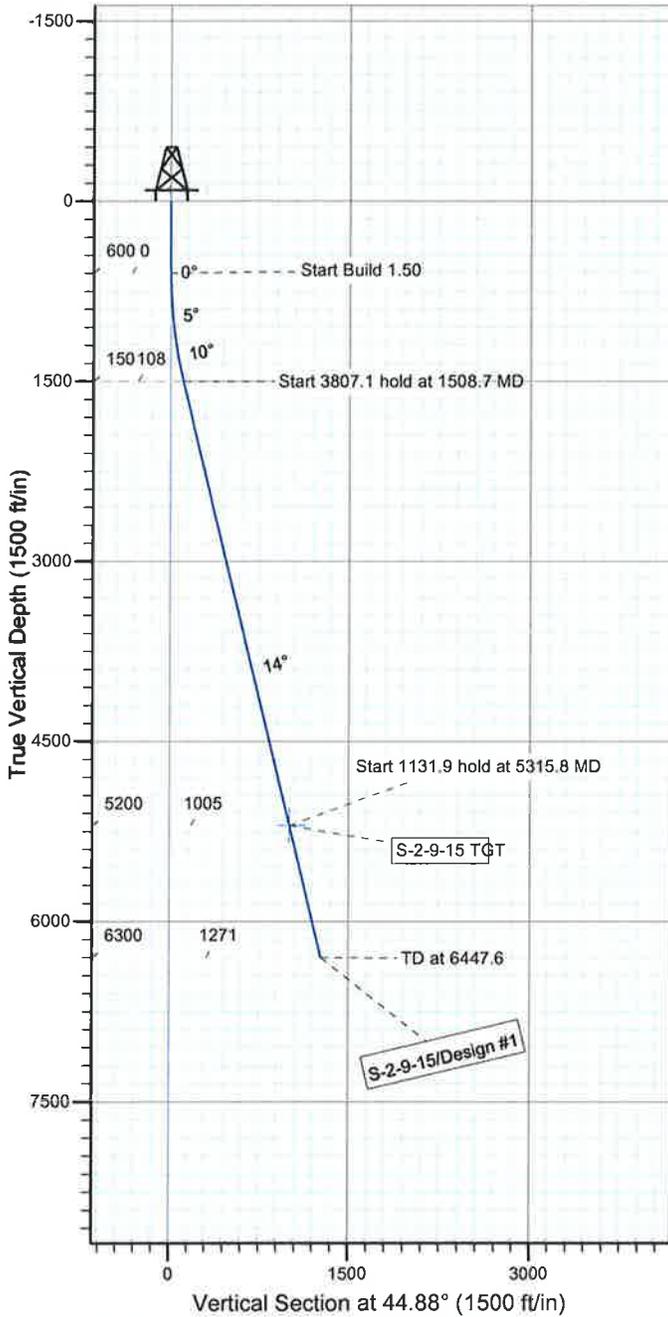

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
S-2-9-15 TGT	5200.0	711.9	709.0	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1508.7	13.63	44.88	1500.2	76.2	75.9	1.50	44.88	107.6	
4	5315.8	13.63	44.88	5200.0	711.9	709.0	0.00	0.00	1004.7	S-2-9-15 TGT
5	6447.6	13.63	44.88	6300.0	900.9	897.3	0.00	0.00	1271.5	







Project: USGS Myton SW (UT)  
 Site: SECTION 2 T9, R15  
 Well: V-2-9-15  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to Grid North  
 True North: -0.83°  
 Magnetic North: 10.57°

Magnetic Field  
 Strength: 52277.0snT  
 Dip Angle: 65.78°  
 Date: 2011/03/15  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100'  
 TARGET RADIUS IS 75'

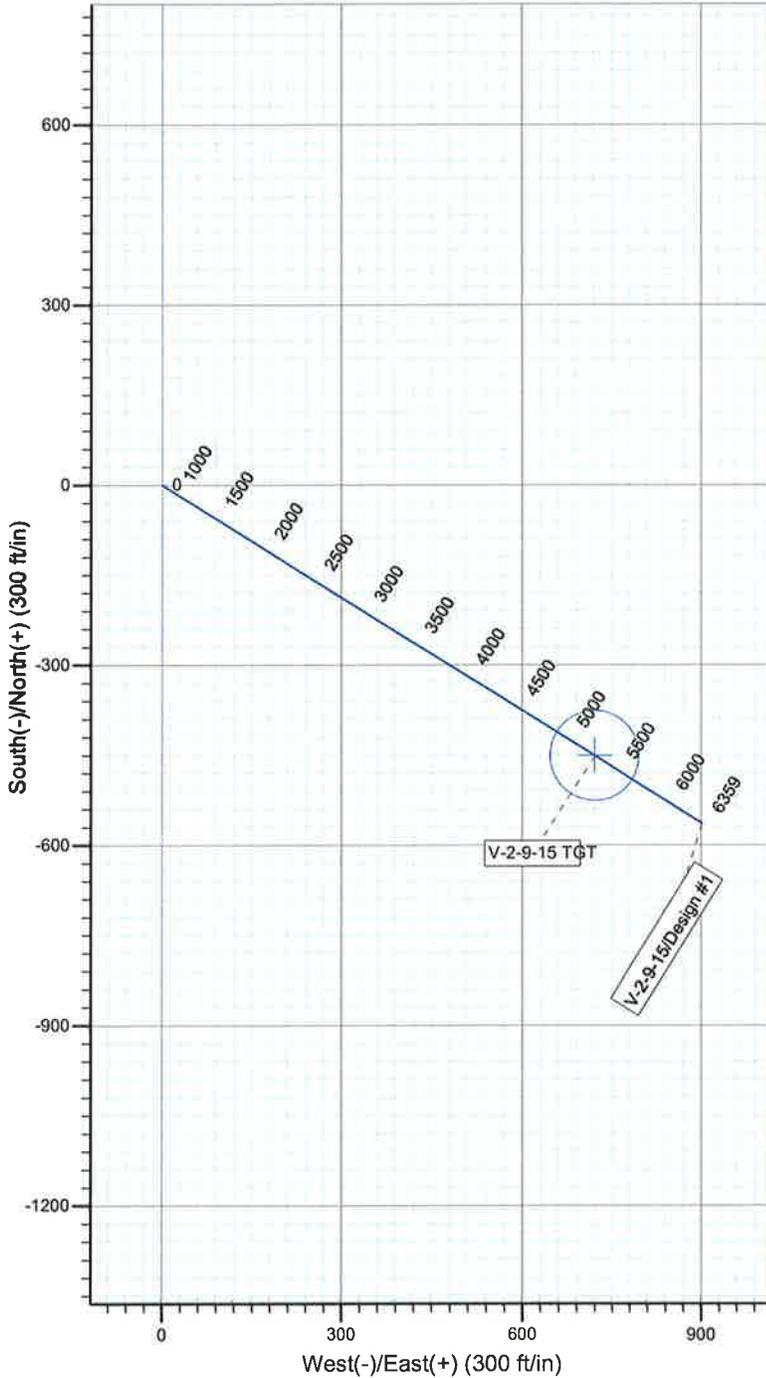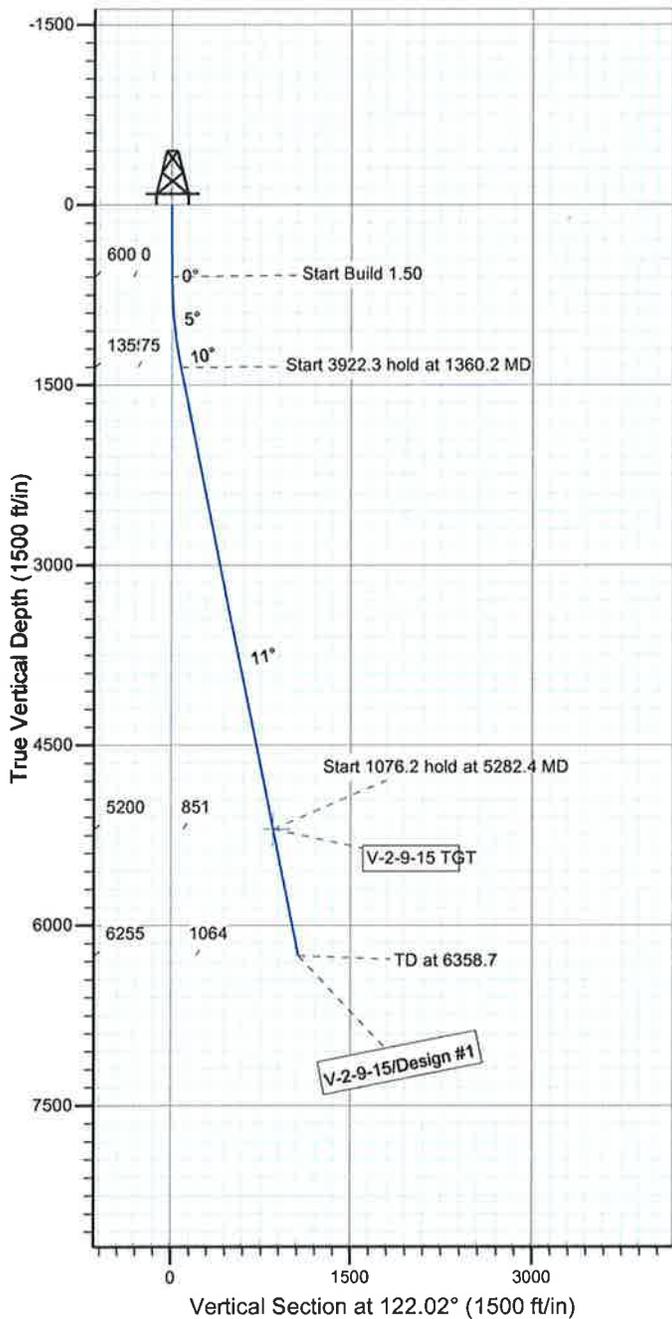

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
V-2-9-15 TGT	5200.0	-451.1	721.4	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1360.2	11.40	122.02	1355.1	-40.0	63.9	1.50	122.02	75.4	
4	5282.4	11.40	122.02	5200.0	-451.1	721.4	0.00	0.00	850.8	V-2-9-15 TGT
5	6358.7	11.40	122.02	6255.0	-563.9	901.8	0.00	0.00	1063.6	







Project: USGS Myton SW (UT)  
 Site: SECTION 2 T9S, R17E  
 Well: D-2-9-17  
 Wellbore: Wellbore #1  
 Design: Design #1



Azimuths to True North  
 Magnetic North: 11.30°

Magnetic Field  
 Strength: 52316.5snT  
 Dip Angle: 65.83°  
 Date: 2011/04/06  
 Model: IGRF2010

KOP @ 600'  
 DOGLEG RATE 1.5 DEG/100'  
 TARGET RADIUS IS 75'

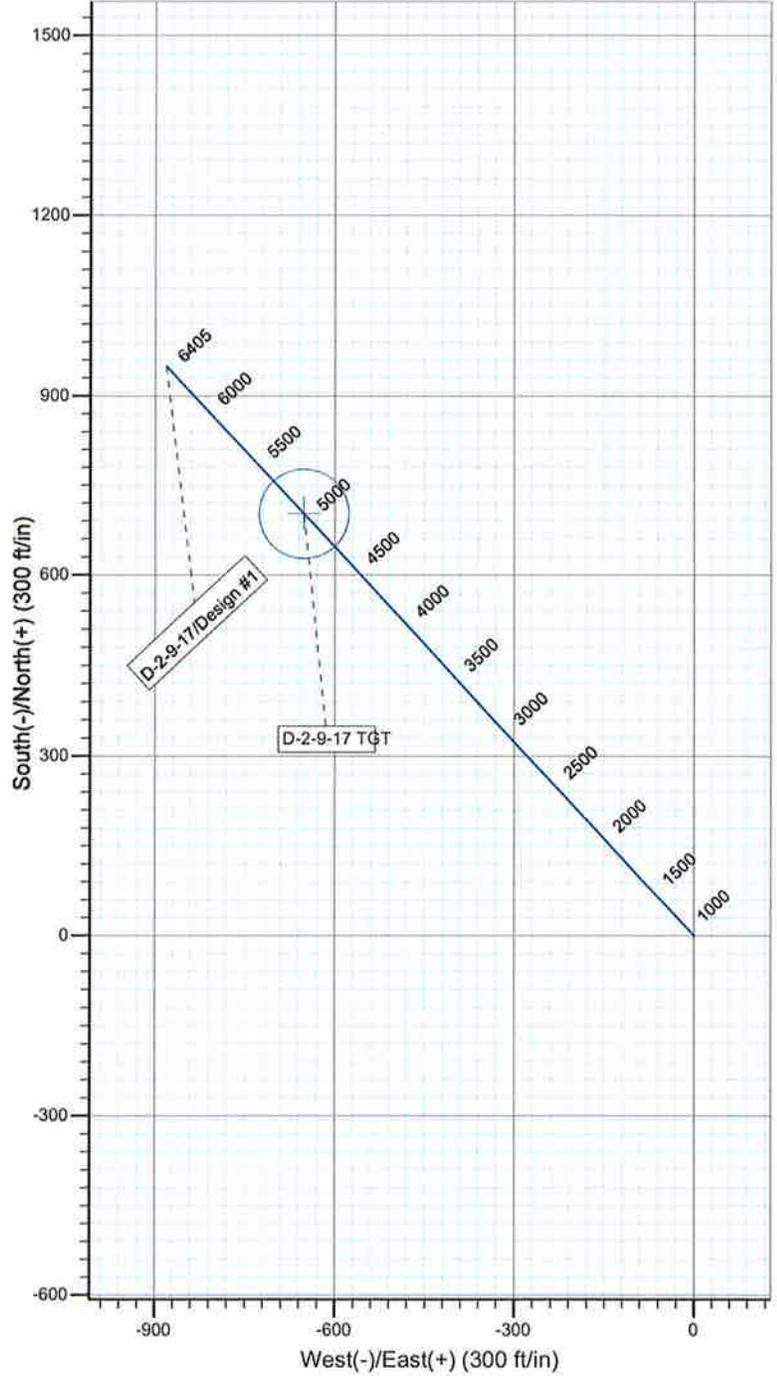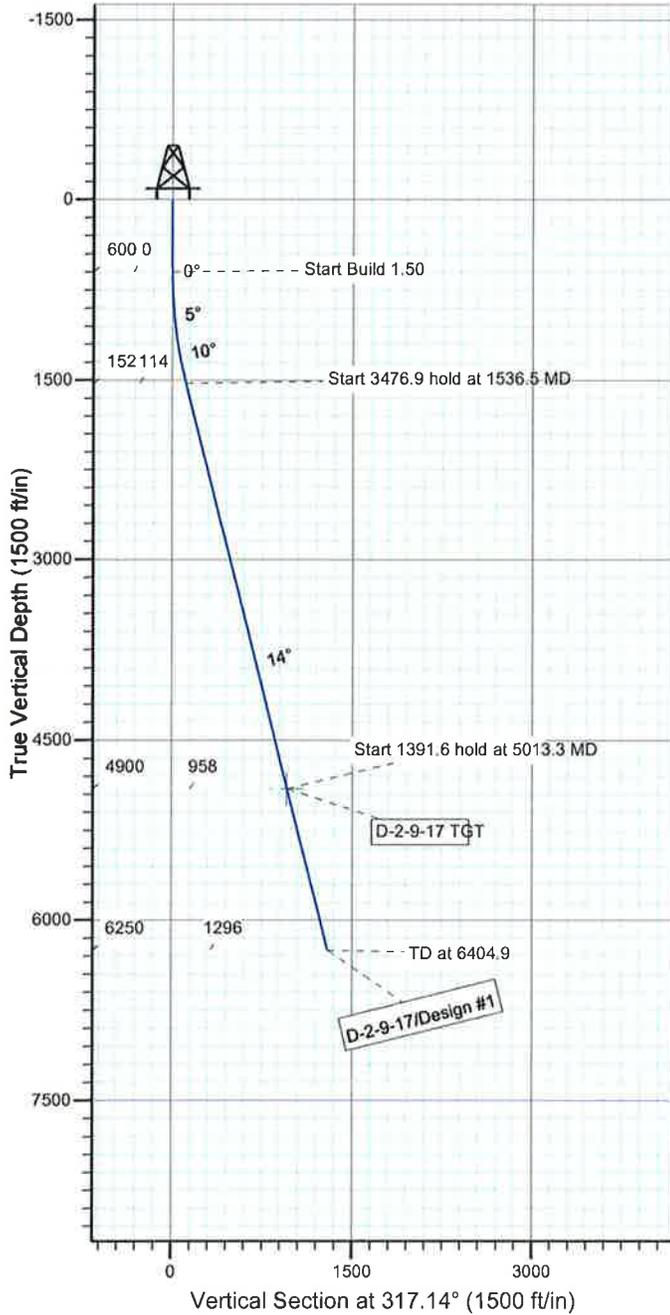

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
D-2-9-17 TGT	4900.0	702.3	-651.7	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1536.5	14.05	317.14	1527.1	83.7	-77.7	1.50	317.14	114.2	
4	5013.3	14.05	317.14	4900.0	702.3	-651.7	0.00	0.00	958.1	D-2-9-17 TGT
5	6404.9	14.05	317.14	6250.0	949.9	-881.5	0.00	0.00	1295.9	






**API Number: 4304751553**  
**Well Name: GMBU D-2-9-17**  
 Township T09 . Range R17 . Section 02  
 Meridian: SLBM  
 Operator: NEWFIELD PRODUCTION COMPANY

Map Prepared:  
 Map Produced by Diana Mason

<b>Units</b>	<b>Wells Query</b>
<b>STATUS</b>	<b>Status</b>
ACTIVE	APD - Approved Permit
EXPLORATORY	DRL - Spudded (Drilling Commenced)
GAS STORAGE	GIW - Gas Injection
NF PP OIL	GS - Gas Storage
NF SECONDARY	LA - Location Abandoned
PI OIL	LOC - New Location
PP GAS	OPS - Operation Suspended
PP GEOTHERMAL	PA - Plugged Abandoned
PP OIL	PGW - Producing Gas Well
SECONDARY	POW - Producing Oil Well
TERMINATED	RET - Returned APD
<b>Fields</b>	SGW - Shut-in Gas Well
Unknown	SOW - Shut-in Oil Well
ABANDONED	TA - Temp. Abandoned
ACTIVE	TW - Test Well
COMBINED	WDW - Water Disposal
INACTIVE	WIW - Water Injection Well
STORAGE	WSW - Water Supply Well
TERMINATED	
Sections	
Township	



**From:** Jim Davis  
**To:** Bonner, Ed; Garrison, LaVonne; Hill, Brad; Mason, Diana  
**CC:** mcrozier@newfield.com; teaton@newfield.com  
**Date:** 5/12/2011 10:02 AM  
**Subject:** Newfield APD approvals

The following APDs have been approved by SITLA. Please see the arch and paleo notes below.

Arch and paleo clearance is granted on this group of APDs.

4301350649 GMBU I-32-8-17  
4304751540 GMBU N-36-8-17  
4301350658 GMBU O-32-8-17  
4301350659 State 3-36-9-16H  
4304751549 GMBU B-2-9-17  
4304751550 GMBU J-2-9-17  
4304751551 GMBU C-2-9-17  
4301350673 GMBU S-2-9-15  
4301350674 GMBU V-2-9-15  
4301350690 GMBU J-32-8-17

On existing pad, requiring no new surface disturbance. Arch and paleo not required.  
4304751553 GMBU D-2-9-17

-Jim Davis

Jim Davis  
Utah Trust Lands Administration  
jimdavis1@utah.gov  
Phone: (801) 538-5156

Well Name	NEWFIELD PRODUCTION COMPANY GMBU D-2-9-17 43047			
String	Surf	Prod		
Casing Size(")	8.625	5.500		
Setting Depth (TVD)	300	6250		
Previous Shoe Setting Depth (TVD)	0	300		
Max Mud Weight (ppg)	8.3	8.4		
BOPE Proposed (psi)	500	2000		
Casing Internal Yield (psi)	2950	4810		
Operators Max Anticipated Pressure (psi)	2754	8.5		

Calculations	Surf String	8.625	"
Max BHP (psi)	.052*Setting Depth*MW=	129	
			<b>BOPE Adequate For Drilling And Setting Casing at Depth?</b>
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=	93	YES <input type="checkbox"/> air drill
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=	63	YES <input type="checkbox"/> OK
			<b>*Can Full Expected Pressure Be Held At Previous Shoe?</b>
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=	63	NO <input type="checkbox"/> OK
Required Casing/BOPE Test Pressure=		300	psi
*Max Pressure Allowed @ Previous Casing Shoe=		0	psi *Assumes 1psi/ft frac gradient

Calculations	Prod String	5.500	"
Max BHP (psi)	.052*Setting Depth*MW=	2730	
			<b>BOPE Adequate For Drilling And Setting Casing at Depth?</b>
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=	1980	YES <input type="checkbox"/>
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=	1355	YES <input type="checkbox"/> OK
			<b>*Can Full Expected Pressure Be Held At Previous Shoe?</b>
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=	1421	NO <input type="checkbox"/> Reasonable fro area
Required Casing/BOPE Test Pressure=		2000	psi
*Max Pressure Allowed @ Previous Casing Shoe=		300	psi *Assumes 1psi/ft frac gradient

Calculations	String		"
Max BHP (psi)	.052*Setting Depth*MW=		
			<b>BOPE Adequate For Drilling And Setting Casing at Depth?</b>
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=		NO <input type="checkbox"/>
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=		NO <input type="checkbox"/>
			<b>*Can Full Expected Pressure Be Held At Previous Shoe?</b>
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=		NO <input type="checkbox"/>
Required Casing/BOPE Test Pressure=			psi
*Max Pressure Allowed @ Previous Casing Shoe=			psi *Assumes 1psi/ft frac gradient

Calculations	String		"
Max BHP (psi)	.052*Setting Depth*MW=		
			<b>BOPE Adequate For Drilling And Setting Casing at Depth?</b>
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=		NO <input type="checkbox"/>
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=		NO <input type="checkbox"/>
			<b>*Can Full Expected Pressure Be Held At Previous Shoe?</b>
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=		NO <input type="checkbox"/>
Required Casing/BOPE Test Pressure=			psi


API Well Number: 43047515530000

\*Max Pressure Allowed @ Previous Casing Shoe=

psi \*Assumes 1psi/ft frac gradient

# 43047515530000 GMBU D-2-9-17

## Casing Schematic

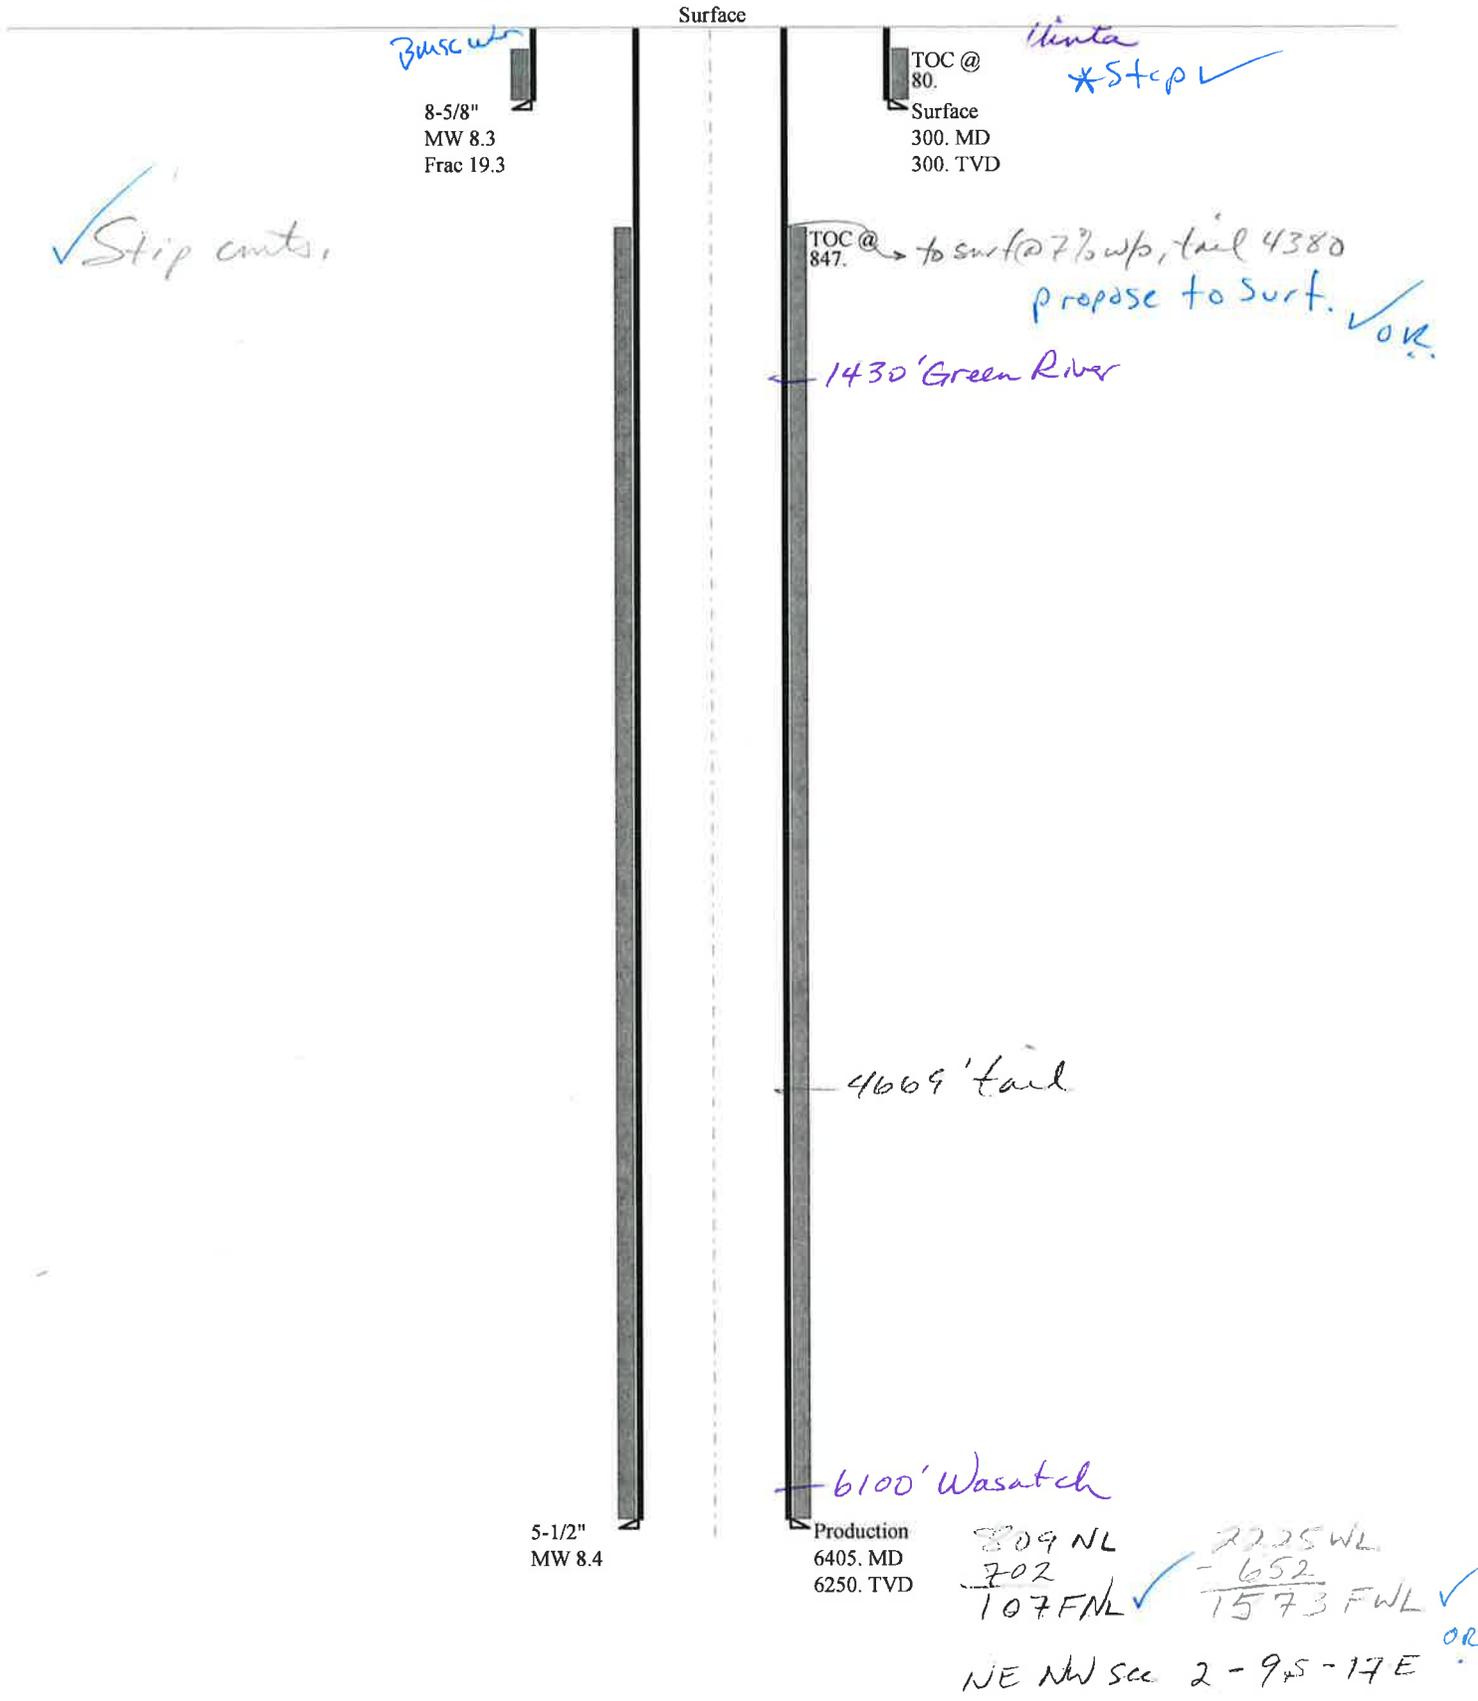

Well name:	<b>43047515530000 GMBU D-2-9-17</b>		
Operator:	<b>NEWFIELD PRODUCTION COMPANY</b>		
String type:	Surface	Project ID:	43-047-51553
Location:	UINTAH COUNTY		

**Design parameters:**

**Collapse**

Mud weight: 8.330 ppg  
 Design is based on evacuated pipe.

**Minimum design factors:**

**Collapse:**

Design factor 1.125

**Burst:**

Design factor 1.00

**Environment:**

H2S considered? No  
 Surface temperature: 74 °F  
 Bottom hole temperature: 78 °F  
 Temperature gradient: 1.40 °F/100ft  
 Minimum section length: 100 ft  
 Cement top: 80 ft

**Burst**

Max anticipated surface pressure: 264 psi  
 Internal gradient: 0.120 psi/ft  
 Calculated BHP 300 psi

No backup mud specified.

**Tension:**

8 Round STC: 1.80 (J)  
 8 Round LTC: 1.70 (J)  
 Buttress: 1.60 (J)  
 Premium: 1.50 (J)  
 Body yield: 1.50 (B)

Tension is based on air weight.  
 Neutral point: 262 ft

**Non-directional string.**

**Re subsequent strings:**

Next setting depth: 6,250 ft  
 Next mud weight: 8,400 ppg  
 Next setting BHP: 2,727 psi  
 Fracture mud wt: 19.250 ppg  
 Fracture depth: 300 ft  
 Injection pressure: 300 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost (\$)
1	300	8.625	24.00	J-55	ST&C	300	300	7.972	1544
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (kips)	Tension Strength (kips)	Tension Design Factor
1	130	1370	10.557	300	2950	9.83	7.2	244	33.90 J

Prepared by: Helen Sadik-Macdonald  
 Div of Oil, Gas & Mining

Phone: 801 538-5357  
 FAX: 801-359-3940

Date: June 28, 2011  
 Salt Lake City, Utah

**Remarks:**

Collapse is based on a vertical depth of 300 ft, a mud weight of 8.33 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

*Engineering responsibility for use of this design will be that of the purchaser.*

Well name:	<b>43047515530000 GMBU D-2-9-17</b>		
Operator:	<b>NEWFIELD PRODUCTION COMPANY</b>		
String type:	Production	Project ID:	43-047-51553
Location:	UINTAH COUNTY		

**Design parameters:**

**Collapse**

Mud weight: 8.400 ppg  
 Design is based on evacuated pipe.

**Minimum design factors:**

**Collapse:**

Design factor 1.125

**Burst:**

Design factor 1.00

**Environment:**

H2S considered? No  
 Surface temperature: 74 °F  
 Bottom hole temperature: 162 °F  
 Temperature gradient: 1.40 °F/100ft  
 Minimum section length: 100 ft

Cement top: 847 ft

**Burst**

Max anticipated surface pressure: 1,352 psi  
 Internal gradient: 0.220 psi/ft  
 Calculated BHP 2,727 psi

No backup mud specified.

**Tension:**

8 Round STC: 1.80 (J)  
 8 Round LTC: 1.80 (J)  
 Buttress: 1.60 (J)  
 Premium: 1.50 (J)  
 Body yield: 1.60 (B)

Tension is based on air weight.  
 Neutral point: 5,586 ft

**Directional Info - Build & Hold**

Kick-off point 600 ft  
 Departure at shoe: 1296 ft  
 Maximum dogleg: 1.5 °/100ft  
 Inclination at shoe: 14.05 °

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost (\$)
1	6405	5.5	15.50	J-55	LT&C	6250	6405	4.825	22616
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (kips)	Tension Strength (kips)	Tension Design Factor
1	2727	4040	1.481	2727	4810	1.76	96.9	217	2.24 J

Prepared by: Helen Sadik-Macdonald  
 Div of Oil, Gas & Mining

Phone: 801 538-5357  
 FAX: 801-359-3940

Date: June 28, 2011  
 Salt Lake City, Utah

**Remarks:**

Collapse is based on a vertical depth of 6250 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Collapse strength is (biaxially) derated for doglegs in directional wells by multiplying the tensile stress by the cross section area to calculate a

*Engineering responsibility for use of this design will be that of the purchaser.*

# ON-SITE PREDRILL EVALUATION

## Utah Division of Oil, Gas and Mining

**Operator** NEWFIELD PRODUCTION COMPANY  
**Well Name** GMBU D-2-9-17  
**API Number** 43047515530000      **APD No** 3627      **Field/Unit** MONUMENT BUTTE  
**Location: 1/4,1/4** NENW    **Sec** 2    **Tw** 9.0S    **Rng** 17.0E    809 FNL 2225 FWL  
**GPS Coord (UTM)** 587449 4435270      **Surface Owner**

### Participants

Floyd Bartlett (DOGM), Tim Eaton (Newfield), Jim Davis (SITLA) and Alex Hansen and Ben Williams (UDWR).

### Regional/Local Setting & Topography

The proposed GMBU D-2-9-17 oil well is a directional well to be drilled from the existing pad of the existing Castle Draw State H-2-9-17 producing oil well and the Monument State 21-2-9-17 water flood injection well. The area is designated for 20 acre spacing. The pad will be extended up to 42 feet on the east end into nearly flat terrain. A reserve pit will be re-dug in approximately the previous location. The previous reserve pit has been re-claimed and seeded. After the new well is completed and the pit closed the existing berm on the south and west sides of the location should be reconstructed to catch any flows from the rocky hillsides in these areas from entering the pad. The oil will be piped to another site.

A field review of the existing pad showed no concerns as it now exists and it should be suitable for drilling and operating the proposed additional well.

SITLA owns the surface.

### Surface Use Plan

#### **Current Surface Use**

Existing Well Pad

<b>New Road Miles</b>	<b>Well Pad</b>	<b>Src Const Material</b>	<b>Surface Formation</b>
	<b>Width    Length</b>		
0			

#### **Ancillary Facilities**

### Waste Management Plan Adequate?

### Environmental Parameters

**Affected Floodplains and/or Wetlands** N

#### **Flora / Fauna**

Existing pad.

#### **Soil Type and Characteristics**

**Erosion Issues** Y

**Sedimentation Issues** Y

**Site Stability Issues** N

**Drainage Diverson Required? Y**

. After the new well is completed and the pit closed the existing berm on the south and west sides of the location should be reconstructed to catch any flows from the rocky hillsides in these areas from entering the pad.

**Berm Required? Y**

**Erosion Sedimentation Control Required? Y**

After the new well is completed and the pit closed the existing berm on the south and west sides of the location should be reconstructed to catch any flows from the rocky hillsides in these areas from entering the pad.

**Paleo Survey Run? Y    Paleo Potential Observed? N    Cultural Survey Run? Y    Cultural Resources?**

**Reserve Pit**

**Site-Specific Factors**

**Site Ranking**

<b>Distance to Groundwater (feet)</b>	100 to 200	5	
<b>Distance to Surface Water (feet)</b>	>1000	0	
<b>Dist. Nearest Municipal Well (ft)</b>	>5280	0	
<b>Distance to Other Wells (feet)</b>		20	
<b>Native Soil Type</b>	Mod permeability	10	
<b>Fluid Type</b>	Fresh Water	5	
<b>Drill Cuttings</b>	Normal Rock	0	
<b>Annual Precipitation (inches)</b>		0	
<b>Affected Populations</b>			
<b>Presence Nearby Utility Conduits</b>	Not Present	0	
	<b>Final Score</b>	40	1 Sensitivity Level

**Characteristics / Requirements**

A reserve pit will be re-dug in the original location on the south side. Its dimensions are 80' x 40' x 8' deep. A 16 mil liner with an appropriate sub-liner is required.

**Closed Loop Mud Required? N    Liner Required? Y    Liner Thickness 16    Pit Underlayment Required? Y**

**Other Observations / Comments**

Floyd Bartlett  
**Evaluator**

4/25/2011  
**Date / Time**

# Application for Permit to Drill Statement of Basis

7/7/2011

## Utah Division of Oil, Gas and Mining

Page 1

<b>APD No</b>	<b>API WellNo</b>	<b>Status</b>	<b>Well Type</b>	<b>Surf Owner</b>	<b>CBM</b>
3627	43047515530000	LOCKED	OW	S	No
<b>Operator</b>	NEWFIELD PRODUCTION COMPANY		<b>Surface Owner-APD</b>		
<b>Well Name</b>	GMBU D-2-9-17		<b>Unit</b>	GMBU (GRRV)	
<b>Field</b>	MONUMENT BUTTE		<b>Type of Work</b>	DRILL	
<b>Location</b>	NENW 2 9S 17E S 809 FNL 2225 FWL		GPS Coord (UTM)	587446E	4435271N

### Geologic Statement of Basis

Newfield proposes to set 300' of surface casing at this location. The the base of the moderately saline water at this location is estimated to be at a or near the surface. A search of Division of Water Rights records shows no water wells within a 10,000 foot radius of the center of Section 2. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be a significant source of useable ground water. The proposed casing and cement programs shouls adequately protect ground water in the area.

Brad Hill  
**APD Evaluator**

4/28/2011  
**Date / Time**

### Surface Statement of Basis

The proposed GMBU D-2-9-17 oil well is a directional well to be drilled from the existing pad of the existing Castle Draw State H-2-9-17 producing oil well and the Monument State 21-2-9-17 water flood injection well. The area in designated for 20 acre spacing. The pad will be extended up to 42 feet on the east end into nearly flat terrain. A reserve pit will be re-dug in approximately the previous location. The previous reserve pit has been re-claimed and seeded. After the new well is completed and the pit closed the existing berm on the south and west sides of the location should be reconstructed to catch any flows from the rocky hillsides in these areas from entering the pad. The oil will be piped to another site.

A field review of the existing pad showed no concerns as it now exists and it should be suitable for drilling and operating the proposed additional well.

SITLA owns the surface. Mr. Jim Davis of SITLA attended the evaluation and had no concerns. Mr. Alex Hansen and Mr. Ben Williams of the UDWR also attended and had no recommendations for wildlife.

A reserve pit will be re-dug in the original location on the south side. Its dimensions are 80' x 40' x 8' deep. A 16 mil liner with an appropriate sub-liner is required.

Floyd Bartlett  
**Onsite Evaluator**

4/25/2011  
**Date / Time**

### Conditions of Approval / Application for Permit to Drill

<b>Category</b>	<b>Condition</b>
Pits	A synthetic liner with a minimum thickness of 16 mils with a felt subliner shall be properly installed and maintained in the reserve pit.
Surface	The well site shall be bermed to prevent fluids from leaving the pad.
Surface	Drainages adjacent to the proposed pad shall be diverted around the location.
Surface	The reserve pit shall be fenced upon completion of drilling operations.

## WORKSHEET APPLICATION FOR PERMIT TO DRILL

**APD RECEIVED:** 4/7/2011**API NO. ASSIGNED:** 43047515530000**WELL NAME:** GMBU D-2-9-17**OPERATOR:** NEWFIELD PRODUCTION COMPANY (N2695)**PHONE NUMBER:** 435 646-4825**CONTACT:** Mandie Crozier**PROPOSED LOCATION:** NENW 02 090S 170E**Permit Tech Review:** **SURFACE:** 0809 FNL 2225 FWL**Engineering Review:** **BOTTOM:** 0100 FNL 1585 FWL**Geology Review:** **COUNTY:** UINTAH**LATITUDE:** 40.06505**LONGITUDE:** -109.97463**UTM SURF EASTINGS:** 587446.00**NORTHINGS:** 4435271.00**FIELD NAME:** MONUMENT BUTTE**LEASE TYPE:** 3 - State**LEASE NUMBER:** ML-45555**PROPOSED PRODUCING FORMATION(S):** GREEN RIVER**SURFACE OWNER:** 3 - State**COALBED METHANE:** NO**RECEIVED AND/OR REVIEWED:**

- PLAT
- Bond: STATE - B001834
- Potash
- Oil Shale 190-5
- Oil Shale 190-3
- Oil Shale 190-13
- Water Permit: 437478
- RDCC Review:
- Fee Surface Agreement
- Intent to Commingle

**Commingle Approved****LOCATION AND SITING:**

- R649-2-3.
- Unit:** GMBU (GRRV)
- R649-3-2. General
- R649-3-3. Exception
- Drilling Unit
- Board Cause No:** Cause 213-11
- Effective Date:** 11/30/2009
- Siting:** Suspends General Siting
- R649-3-11. Directional Drill

**Comments:** Presite Completed

**Stipulations:** 5 - Statement of Basis - bhill  
 8 - Cement to Surface -- 2 strings - ddoucet  
 15 - Directional - dmason  
 27 - Other - bhill



GARY R. HERBERT  
*Governor*

GREGORY S. BELL  
*Lieutenant Governor*

## State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER  
*Executive Director*

Division of Oil, Gas and Mining

JOHN R. BAZA  
*Division Director*

### Permit To Drill

\*\*\*\*\*

**Well Name:** GMBU D-2-9-17  
**API Well Number:** 43047515530000  
**Lease Number:** ML-45555  
**Surface Owner:** STATE  
**Approval Date:** 7/7/2011

**Issued to:**

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

**Authority:**

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 213-11. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

**Duration:**

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

**General:**

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

**Conditions of Approval:**

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis (copy attached).

Production casing cement shall be brought up to or above the top of the unitized interval for the Greater Monument Butte Unit (Cause No. 213-11).

Cement volumes for the 8 5/8" and 5 1/2" casing strings shall be determined from actual hole diameters in order to place cement from the pipe setting depths back to the surface as indicated in the submitted drilling plan.

**Additional Approvals:**

The operator is required to obtain approval from the Division of Oil, Gas and mining before performing any of the following actions during the drilling of this well:

- Any changes to the approved drilling plan – contact Dustin Doucet

- Significant plug back of the well – contact Dustin Doucet
- Plug and abandonment of the well – contact Dustin Doucet

**Notification Requirements:**

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well – contact Carol Daniels  
OR  
submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at <http://oilgas.ogm.utah.gov>
- 24 hours prior to testing blowout prevention equipment - contact Dan Jarvis
- 24 hours prior to cementing or testing casing – contact Dan Jarvis
- Within 24 hours of making any emergency changes to the approved drilling program – contact Dustin Doucet
- 24 hours prior to commencing operations to plug and abandon the well – contact Dan Jarvis

**Contact Information:**

The following are Division of Oil, Gas and Mining contacts and their telephone numbers (please leave a voicemail message if the person is not available to take the call):

- Carol Daniels 801-538-5284 - office
- Dustin Doucet 801-538-5281 - office  
801-733-0983 - after office hours
- Dan Jarvis 801-538-5338 - office  
801-231-8956 - after office hours

**Reporting Requirements:**

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

**Approved By:**



For John Rogers  
Associate Director, Oil & Gas

Spud  
BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# 21 Submitted By Britt Stubbs Phone Number 435-823-0096  
Well Name/Number GMBU D-2-9-17  
Qtr/Qtr NE/NW Section 2 Township 9S Range 17E  
Lease Serial Number ML-45555  
API Number 43-047-51553

Spud Notice – Spud is the initial spudding of the well, not drilling out below a casing string.

Date/Time 7/25/11      9:00 AM  PM

Casing – Please report time casing run starts, not cementing times.

- Surface Casing
- Intermediate Casing
- Production Casing
- Liner
- Other

Date/Time 7/25/11      3:00 AM  PM

BOPE

- Initial BOPE test at surface casing point
- BOPE test at intermediate casing point
- 30 day BOPE test
- Other

Date/Time \_\_\_\_\_ AM  PM

Remarks \_\_\_\_\_

---

STATE OF UTAH  
 DIVISION OF OIL, GAS AND MINING  
 ENTITY ACTION FORM -FORM 6

OPERATOR: NEWFIELD PRODUCTION COMPANY  
 ADDRESS: RT, 3 BOX 3630  
MYTON, UT 84052

OPERATOR ACCT. NO. N2695

R


ACTION CODE	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
B	99999	17400	4301350545	GMBU V-1-9-16	NWNE SESE	13 1	9S	16E	DUCHESNE	7/29/2011	8/4/11
WELL 1 COMMENTS: GRRV BHL Sec 1 SESE											
B	99999	17400	4301350483	GMBU L-7-9-17	SENE NWNE	7	9S	17E	DUCHESNE	7/27/2011	8/4/11
GRRV BHL = NWSE											
B	99999	17400	4301350486	GMBU O-8-9-17	SENE	7 8	9S	17E	DUCHESNE	7/29/2011	8/4/11
GRRV BHL = Sec 8 NWSW											
B	99999	17400	4304751553	GMBU D-2-9-17	NENW	2	9S	17E	UINTAH	7/28/2011	8/4/11
GRRV BHL = NENW											
A	99999	18158	4304751416	RIO GRANDE 13-13-4-1W	SWSW	13	4S	1W	UINTAH	7/13/2011	8/4/11
GRRV											

ACTION CODES (See instructions on back of form)  
 A - new entity for new well (single well only)  
 B - well to existing entity (group or unit well)  
 C - from one existing entity to another existing entity  
 D - well from one existing entity to a new entity  
 E - other (explain in comments section)

NOTE: Use COMMENT section to explain why each Action Code was selected.

RECEIVED  
 AUG 03 2011

DIV. OF OIL, GAS & MINING

Signature:   
 Jentri Park  
 Production Clerk  
 08/03/11

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

5. LEASE DESIGNATION AND SERIAL NUMBER:  
UTAH STATE ML-45555

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:  
GMBU

1. TYPE OF WELL: OIL WELL  GAS WELL  OTHER

8. WELL NAME and NUMBER:  
GMBU D-2-9-17

2. NAME OF OPERATOR:  
NEWFIELD PRODUCTION COMPANY

9. API NUMBER:  
4304751553

3. ADDRESS OF OPERATOR:  
Route 3 Box 3630 CITY Myton STATE UT ZIP 84052 PHONE NUMBER 435.646.3721

10. FIELD AND POOL, OR WILDCAT:  
GREATER MB UNIT

4. LOCATION OF WELL:  
FOOTAGES AT SURFACE: 0809 FNL 2225 FWL

COUNTY: DUCHESNE

OTR/OTR. SECTION. TOWNSHIP. RANGE. MERIDIAN: , 2, T9S, R17E

STATE: UT

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARITLY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLAIR
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of Work Completion: 08/01/2011	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/STOP)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: - Spud Notice
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

On 7/28/11 MIRU Ross #21. Spud well @9:00 AM. Drill 325' of 12 1/4" hole with air mist. TIH W/ 7 Jt's 8 5/8" J-55 24# csgn. Set @ 323.42. On 7/29/11 cement with 160 sks of class "G" w/ 2% CaCL2 + 0.25#/sk Cello- Flake Mixed @ 15.8ppg w/ 1.17ft3/sk yield. Returned 5 barrels cement to pit. WOC.

**RECEIVED**  
**AUG 09 2011**  
DIV. OF OIL, GAS & MINING

NAME (PLEASE PRINT) Britt Stubbs TITLE Spud Rig Foreman

SIGNATURE  DATE 08/01/2011





<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		<b>FORM 9</b>
		<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> ML-45555
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>		<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		<b>7. UNIT or CA AGREEMENT NAME:</b> GMBU (GRRV)
<b>1. TYPE OF WELL</b> Oil Well		<b>8. WELL NAME and NUMBER:</b> GMBU D-2-9-17
<b>2. NAME OF OPERATOR:</b> NEWFIELD PRODUCTION COMPANY		<b>9. API NUMBER:</b> 43047515530000
<b>3. ADDRESS OF OPERATOR:</b> Rt 3 Box 3630 , Myton, UT, 84052	<b>PHONE NUMBER:</b> 435 646-4825 Ext	<b>9. FIELD and POOL or WILDCAT:</b> MONUMENT BUTTE
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 0809 FNL 2225 FWL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: NENW Section: 02 Township: 09.0S Range: 17.0E Meridian: S		<b>COUNTY:</b> UINTAH
		<b>STATE:</b> UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
<b>TYPE OF SUBMISSION</b>	<b>TYPE OF ACTION</b>	
<input type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start:  <input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:  <input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:  <input checked="" type="checkbox"/> <b>DRILLING REPORT</b> Report Date: 9/1/2011	<input type="checkbox"/> <b>ACIDIZE</b> <input type="checkbox"/> <b>ALTER CASING</b> <input type="checkbox"/> <b>CHANGE TO PREVIOUS PLANS</b> <input type="checkbox"/> <b>CHANGE TUBING</b> <input type="checkbox"/> <b>CHANGE WELL STATUS</b> <input type="checkbox"/> <b>COMMINGLE PRODUCING FORMATIONS</b> <input type="checkbox"/> <b>DEEPEN</b> <input type="checkbox"/> <b>FRACTURE TREAT</b> <input type="checkbox"/> <b>OPERATOR CHANGE</b> <input type="checkbox"/> <b>PLUG AND ABANDON</b> <input checked="" type="checkbox"/> <b>PRODUCTION START OR RESUME</b> <input type="checkbox"/> <b>RECLAMATION OF WELL SITE</b> <input type="checkbox"/> <b>REPERFORATE CURRENT FORMATION</b> <input type="checkbox"/> <b>SIDETRACK TO REPAIR WELL</b> <input type="checkbox"/> <b>TUBING REPAIR</b> <input type="checkbox"/> <b>VENT OR FLARE</b> <input type="checkbox"/> <b>WATER SHUTOFF</b> <input type="checkbox"/> <b>SI TA STATUS EXTENSION</b> <input type="checkbox"/> <b>WILDCAT WELL DETERMINATION</b> <input type="checkbox"/> <b>OTHER</b>	
		<input type="checkbox"/> <b>CASING REPAIR</b> <input type="checkbox"/> <b>CHANGE WELL NAME</b> <input type="checkbox"/> <b>CONVERT WELL TYPE</b> <input type="checkbox"/> <b>NEW CONSTRUCTION</b> <input type="checkbox"/> <b>PLUG BACK</b> <input type="checkbox"/> <b>RECOMPLETE DIFFERENT FORMATION</b> <input type="checkbox"/> <b>TEMPORARY ABANDON</b> <input type="checkbox"/> <b>WATER DISPOSAL</b> <input type="checkbox"/> <b>APD EXTENSION</b> OTHER: <input style="width: 100px;" type="text"/>
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.		
The above well was completed on 09/01/2011. Attached is a daily completion status report.		
<b>Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY</b>		
<b>NAME (PLEASE PRINT)</b> Jennifer Peatross	<b>PHONE NUMBER</b> 435 646-4885	<b>TITLE</b> Production Technician
<b>SIGNATURE</b> N/A		<b>DATE</b> 10/7/2011

## Daily Activity Report

Format For Sundry

GMBU D-2-9-17

6/1/2011 To 10/30/2011

**8/23/2011 Day: 1**

**Completion**

Rigless on 8/23/2011 - Run CBL and perf stage 1. - Safety Meeting, discussed location hazards, recent NFX incidents, job procedure, emergency plans, meeting point. NU Cameron BOP's. RU Hot oiler & test casing, well head, casing valves & BOP to 4500 psi. RU The Perforators WLT w/ crane & pack off tool. Run CBL under pressure. WLTD was 6121' w/ TOC @ 49'. RIH w/ 3 1/8" ported guns & perforate CP1 sds @ 5707-10' w/ (11 gram, .36" EH, 16.82 pen. 120°) 3 spf for total of 9 shots. RD WLT & Hot Oiler. SIWFN w/ 146.5 BWTR.

**Daily Cost:** \$0

**Cumulative Cost:** \$25,401

**8/29/2011 Day: 2**

**Completion**

Rigless on 8/29/2011 - Frac stg 1, perf & frac stg 2,3,4 - Frac stg 1, perf & frac stg 2,3,4. Appx 1291 bbls to recover. MIRU WWS#3

**Daily Cost:** \$0

**Cumulative Cost:** \$87,542

**9/1/2011 Day: 3**

**Completion**

WWS #3 on 9/1/2011 - Set kill plug, begin drill out plugs - 750 PSI ON WELL - RU HOT OIL - PUMP 15 BBLS DOWN WELL - RU WIRELINE - SET KILL PLUG @ 4750 - RD HOT OIL & WIRELINE - UNLOAD TUBING - ND CAMERON BOPS - NU 5K BOPS - PU & TALLY W/4 3/4" CHOMP BIT & TBG - WELL STARTED TO FLOW - TRY TO BULLHEAD WELL - PUMP 1 BBL, PSI UP TO 500 - CWI 5 MIN, PSI UP TO 200 - WATCH WELL 1 HR - STAB WASHINGTON RUBBER & TBG DISK - TIH W/TBG - FILL TBG EVERY 50 JTS - TAG PLUG @ 4750' - RU RBS POWER SWVL - DRILL OUT PLUG (15 MIN) - CIRC WELL - CWI EOT @ 4925 - FLAT TANK FULL OF OIL - 750 PSI ON WELL - RU HOT OIL - PUMP 15 BBLS DOWN WELL - RU WIRELINE - SET KILL PLUG @ 4750 - RD HOT OIL & WIRELINE - UNLOAD TUBING - ND CAMERON BOPS - NU 5K BOPS - PU & TALLY W/4 3/4" CHOMP BIT & TBG - WELL STARTED TO FLOW - TRY TO BULLHEAD WELL - PUMP 1 BBL, PSI UP TO 500 - CWI 5 MIN, PSI UP TO 200 - WATCH WELL 1 HR - STAB WASHINGTON RUBBER & TBG DISK - TIH W/TBG - FILL TBG EVERY 50 JTS - TAG PLUG @ 4750' - RU RBS POWER SWVL - DRILL OUT PLUG (15 MIN) - CIRC WELL - CWI EOT @ 4925 - FLAT TANK FULL OF OIL - PSI ON WELL, 700 CSG, 590 TBG - CLEAN FLAT TANK - PUMP 30 BBL SDOWN - PU & TIH - TAG PLUG @ 5030' - DRILL OUT (16 MIN) - PU & TIH - TAG PLUG @ 5190' - DRILL OUT (17 MIN) - PU & TIH - TAG FILL @ 6045' - CLEAN OUT 102' OF FILL TO PB @ 6154 - CIRC WELL CLEAN - LD ROCK OUT, RBS SWVL - LD 3 JTS - ROT @ 6073 - RU SWAB - MAKE 4 SWAB RUNS - WELL STARTED TO FLOW - FLOWBACK 240 BBLS IN 4 HRS - CWI - PSI ON WELL, 700 CSG, 590 TBG - CLEAN FLAT TANK - PUMP 30 BBL SDOWN - PU & TIH - TAG PLUG @ 5030' - DRILL OUT (16 MIN) - PU & TIH - TAG PLUG @ 5190' - DRILL OUT (17 MIN) - PU & TIH - TAG FILL @ 6045' - CLEAN OUT 102' OF FILL TO PB @ 6154 - CIRC WELL CLEAN - LD ROCK OUT, RBS SWVL - LD 3 JTS - ROT @ 6073 - RU SWAB - MAKE 4 SWAB RUNS - WELL STARTED TO FLOW - FLOWBACK 240 BBLS IN 4 HRS - CWI

**Daily Cost:** \$0

**Cumulative Cost:** \$97,714

**9/2/2011 Day: 5**

**Completion**

**RECEIVED** Oct. 07, 2011

WWS #3 on 9/2/2011 - Run production string - PSI ON WELL, 650 CSG, 600 TBG - PUMP 30 BBLs BRINE DOWN TBG - PU & TIH TO PB @ 6154' - NO NEW FILL - CIRC WELL W/230 BBLs BRINE - LD EXTRA TBG AS FOLLOWS - NC 2-JTS, PSN 1-JT, TAC 182 JTS - ND BOPS - SET TAC W/18,000 TENSION - LAND TBG W/TBG HANGER - NU B1 ADAPTER FLANGE W/TAC @ 5678.29 PSN @ 5712.30 EOT @ 5775.01 - X-OVER TO ROD EQUIP - FLUSH TBG W/60 BBLs - PU & TIH W/RODS AS FOLLOWS - 5-1 1/2 WT BARS - W-5 1X4 STABILIZER - 14-1 3/4 GUIDED - 79 7/8 GUIDED - 2-8 7/8 PONY - 1-2 7/8 PONY - 1 1/2X30 POLISH ROD - SEAT PUMP - RU PUMPING UNIT - HANG RODS OFF TO UNIT - STROKE PUMP W/UNIT TO 800 PSI - RDMO - PWOP @ 5:30 W/144" SL+5 SPM **Finalized**

**Daily Cost:** \$0

**Cumulative Cost:** \$201,749

---

**Pertinent Files:** [Go to File List](#)

**RECEIVED** Oct. 07, 2011

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB NO. 1004-0137  
Expires: July 31, 2010

**WELL COMPLETION OR RECOMPLETION REPORT AND LOG**

5. Lease Serial No.  
ML-45555

1a. Type of Well  Oil Well  Gas Well  Dry  Other  
 b. Type of Completion:  New Well  Work Over  Deepen  Plug Back  Diff. Resvr.,  
 Other: \_\_\_\_\_

6. If Indian, Allottee or Tribe Name

7. Unit or CA Agreement Name and No.  
GMBU

2. Name of Operator  
NEWFIELD EXPLORATION COMPANY

8. Lease Name and Well No.  
GMBU D-2-9-17

3. Address  
1401 17TH ST. SUITE 1000 DENVER, CO 80202

3a. Phone No. (include area code)  
(435) 646-3721

9. AFI Well No.  
43-047-51553

4. Location of Well (Report location clearly and in accordance with Federal requirements)\*

At surface 809' FNL & 2225' FWL (NE/NW) SEC. 2, T9S, R17E (ML-45555)

10. Field and Pool or Exploratory  
MONUMENT BUTTE

11. Sec., T., R., M., on Block and  
Survey or Area  
SEC. 2, T9S, R17E

At top prod. interval reported below 278' FNL & 1732' FWL (NE/NW) SEC. 2, T9S, R17E (ML-45555)

12. County or Parish

UINTAH

13. State

UT

At total depth 132' FNL & 1580' FWL (NE/NW) SEC. 2, T9S, R17E (ML-45555) *bhl by ltsm*

14. Date Spudded  
07/28/2011

15. Date T.D. Reached  
08/15/2011

16. Date Completed 09/01/2011  
 D & A  Ready to Prod.

17. Elevations (DF, RKB, RT, GL)\*  
5019' GL 5031' KB

18. Total Depth: MD 6212'  
TVD 6130'

19. Plug Back T.D.: MD 6154'  
TVD 6072

20. Depth Bridge Plug Set: MD  
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)  
 DUAL IND GRD, SP, COMP. DENSITY, COMP. NEUTRON, GR, CALIPER, CMT BOND

22. Was well cored?  No  Yes (Submit analysis)  
Was DST run?  No  Yes (Submit report)  
Directional Survey?  No  Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sks. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12-1/4"	8-5/8" J-55	24#	0	325'		160 CLASS G			
7-7/8"	5-1/2" J-55	15.5#	0	6201'		250 PRIMLITE		49'	
						400 50/50 POZ			

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-7/8"	EOT@ 5775'	TA @ 5678'						

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Green River	4817'	5710'	5707-5710'	.36"	9	
B)			4817-5148'	.34"	45	
C)						
D)						

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

Depth Interval	Amount and Type of Material
4817-5710'	Frac w/ 88255#s 20/40 sand in 682 bbls of Lightning 17 fluid in 4 stages.

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
9/2/11	9/14/11	24	→	49	8	9			2-1/2" x 1-3/4" x 20' x 21' x 24' RHAC Pump
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→					PRODUCING	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

RECEIVED  
DEC 01 2011

\*(See instructions and spaces for additional data on page 2)

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	

29. Disposition of Gas (Solid, used for fuel, vented, etc.)

USED FOR FUEL

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

GEOLOGICAL MARKERS

Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
GREEN RIVER	4817'	5710'		GARDEN GULCH MRK	3814'
				GARDEN GULCH 1	3999'
				GARDEN GULCH 2	4117'
				POINT 3	4385'
				X MRKR	4619'
				Y MRKR	4654'
DOUGLAS CREEK MRK				BI CARBONATE MRK	4789'
					5039'
B LIMESTON MRK				CASTLE PEAK	5183'
					5822'
BASAL CARBONATE				WASATCH	6050'
					6171'

32. Additional remarks (include plugging procedure):

33. Indicate which items have been attached by placing a check in the appropriate boxes:

- Electrical/Mechanical Logs (1 full set req'd.)     
  Geologic Report     
  DST Report     
  Directional Survey  
 Sundry Notice for plugging and cement verification     
  Core Analysis     
  Other: Drilling Daily Activity

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)\*

Name (please print) Jennifer Peatross      Title Production Technician  
 Signature Jennifer Peatross      Date 10/26/2011

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**NEWFIELD**



# **NEWFIELD EXPLORATION**

**USGS Myton SW (UT)  
SECTION 2 T9S, R17E  
D-2-9-17**

**Wellbore #1**

**Design: Actual**

## **Standard Survey Report**

**16 August, 2011**



# PayZone Directional Services, LLC.

## Survey Report



<b>Company:</b>	NEWFIELD EXPLORATION	<b>Local Co-ordinate Reference:</b>	Well D-2-9-17
<b>Project:</b>	USGS Myton SW (UT)	<b>TVD Reference:</b>	D-2-9-17 @ 5031.0ft (Newfield Rig #2)
<b>Site:</b>	SECTION 2 T9S, R17E	<b>MD Reference:</b>	D-2-9-17 @ 5031.0ft (Newfield Rig #2)
<b>Well:</b>	D-2-9-17	<b>North Reference:</b>	True
<b>Wellbore:</b>	Wellbore #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	Actual	<b>Database:</b>	EDM 2003.21 Single User Db

<b>Project</b>	USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA		
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	North American Datum 1983		
<b>Map Zone:</b>	Utah Central Zone		

<b>Site</b>	SECTION 2 T9S, R17E, SEC 2 T9S, R17E				
<b>Site Position:</b>		<b>Northing:</b>	7,194,800.00 ft	<b>Latitude:</b>	40° 3' 41.746 N
<b>From:</b>	Lat/Long	<b>Easting:</b>	2,067,293.09 ft	<b>Longitude:</b>	109° 58' 29.067 W
<b>Position Uncertainty:</b>	0.0 ft	<b>Slot Radius:</b>	"	<b>Grid Convergence:</b>	0.98 °

<b>Well</b>	D-2-9-17, SHL LAT: 40 03 54.06 LONG: -109 58 31.15					
<b>Well Position</b>	<b>+N/-S</b>	0.0 ft	<b>Northing:</b>	7,196,043.05 ft	<b>Latitude:</b>	40° 3' 54.060 N
	<b>+E/-W</b>	0.0 ft	<b>Easting:</b>	2,067,109.95 ft	<b>Longitude:</b>	109° 58' 31.150 W
<b>Position Uncertainty</b>		0.0 ft	<b>Wellhead Elevation:</b>	5,031.0 ft	<b>Ground Level:</b>	5,019.0 ft

<b>Wellbore</b>	Wellbore #1				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF2010	2011/04/06	11.31	65.83	52,317

<b>Design</b>	Actual				
<b>Audit Notes:</b>					
<b>Version:</b>	1.0	<b>Phase:</b>	ACTUAL	<b>Tie On Depth:</b>	0.0
<b>Vertical Section:</b>	<b>Depth From (TVD) (ft)</b>	<b>+N/-S (ft)</b>	<b>+E/-W (ft)</b>	<b>Direction (°)</b>	
	0.0	0.0	0.0	317.14	

<b>Survey Program</b>	Date 2011/08/16				
<b>From (ft)</b>	<b>To (ft)</b>	<b>Survey (Wellbore)</b>	<b>Tool Name</b>	<b>Description</b>	
360.0	6,212.0	Survey #1 (Wellbore #1)	MWD	MWD - Standard	

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Buidl Rate (°/100ft)	Turn Rate (°/100ft)	
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00	
<b>D-2-9-17 NO GO ZONE</b>										
360.0	0.40	265.49	360.0	-0.1	-1.3	0.8	0.11	0.11	0.00	
390.0	0.70	283.60	390.0	-0.1	-1.5	1.0	1.14	1.00	60.37	
421.0	0.70	267.80	421.0	0.0	-1.9	1.3	0.62	0.00	-50.97	
451.0	0.90	269.30	451.0	0.0	-2.3	1.6	0.67	0.67	5.00	
482.0	0.90	296.78	482.0	0.1	-2.8	1.9	1.38	0.00	88.65	
513.0	1.30	299.90	513.0	0.4	-3.3	2.5	1.30	1.29	10.06	
543.0	1.80	292.40	543.0	0.7	-4.0	3.3	1.80	1.67	-25.00	
573.0	1.80	295.00	573.0	1.1	-4.9	4.1	0.27	0.00	8.67	
604.0	2.00	308.00	603.9	1.6	-5.8	5.1	1.53	0.65	41.94	
635.0	2.20	310.70	634.9	2.3	-6.6	6.2	0.72	0.65	8.71	
665.0	2.50	308.64	664.9	3.1	-7.6	7.5	1.04	1.00	-6.87	



Company: NEWFIELD EXPLORATION  
 Project: USGS Myton SW (UT)  
 Site: SECTION 2 T9S, R17E  
 Well: D-2-9-17  
 Wellbore: Wellbore #1  
 Design: Actual

Local Co-ordinate Reference: Well D-2-9-17  
 TVD Reference: D-2-9-17 @ 5031.0ft (Newfield Rig #2)  
 MD Reference: D-2-9-17 @ 5031.0ft (Newfield Rig #2)  
 North Reference: True  
 Survey Calculation Method: Minimum Curvature  
 Database: EDM 2003.21 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N-S (ft)	+E-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
695.0	2.90	316.20	694.9	4.1	-8.6	8.9	1.78	1.33	25.20
726.0	3.20	322.30	725.8	5.3	-9.7	10.5	1.42	0.97	19.68
756.0	2.90	323.90	755.8	6.6	-10.7	12.1	1.04	-1.00	5.33
786.0	3.60	325.90	785.7	8.0	-11.6	13.8	2.36	2.33	6.67
817.0	3.90	318.90	816.7	9.6	-12.9	15.8	1.76	0.97	-22.58
847.0	4.30	323.10	846.6	11.3	-14.2	17.9	1.67	1.33	14.00
879.0	4.60	322.40	878.5	13.2	-15.7	20.4	0.95	0.94	-2.19
911.0	5.10	321.10	910.4	15.4	-17.4	23.1	1.60	1.56	-4.06
942.0	5.50	320.30	941.2	17.6	-19.2	26.0	1.31	1.29	-2.58
974.0	5.80	317.90	973.1	20.0	-21.3	29.1	1.19	0.94	-7.50
1,006.0	6.00	319.00	1,004.9	22.4	-23.5	32.4	0.72	0.63	3.44
1,037.0	6.50	322.00	1,035.7	25.0	-25.6	35.8	1.93	1.61	9.68
1,069.0	7.26	322.80	1,067.5	28.1	-27.9	39.6	2.39	2.38	2.50
1,101.0	7.90	321.80	1,099.2	31.4	-30.5	43.8	2.04	2.00	-3.13
1,133.0	7.80	319.90	1,130.9	34.8	-33.3	48.1	0.87	-0.31	-5.94
1,165.0	8.70	319.40	1,162.6	38.3	-36.3	52.7	2.82	2.81	-1.56
1,196.0	9.00	319.70	1,193.2	41.9	-39.4	57.5	0.98	0.97	0.97
1,228.0	9.60	319.90	1,224.8	45.9	-42.7	62.7	1.88	1.88	0.63
1,259.0	9.80	318.10	1,255.4	49.8	-46.1	67.9	1.17	0.65	-5.81
1,291.0	10.10	319.00	1,286.9	54.0	-49.8	73.4	1.06	0.94	2.81
1,323.0	10.20	317.90	1,318.4	58.2	-53.5	79.1	0.68	0.31	-3.44
1,355.0	10.50	319.40	1,349.9	62.5	-57.3	84.8	1.26	0.94	4.69
1,386.0	10.50	318.20	1,380.3	66.7	-61.0	90.4	0.71	0.00	-3.87
1,418.0	10.70	318.80	1,411.8	71.2	-64.9	96.3	0.71	0.63	1.88
1,450.0	10.70	319.10	1,443.2	75.6	-68.8	102.3	0.17	0.00	0.94
1,481.0	10.80	317.40	1,473.7	80.0	-72.7	108.0	1.07	0.32	-5.48
1,513.0	10.80	316.40	1,505.1	84.3	-76.8	114.0	0.59	0.00	-3.13
1,545.0	10.60	315.90	1,536.6	88.6	-80.9	120.0	0.69	-0.63	-1.56
1,577.0	10.50	314.80	1,568.0	92.8	-85.0	125.8	0.70	-0.31	-3.44
1,608.0	10.50	315.70	1,598.5	96.8	-89.0	131.5	0.53	0.00	2.90
1,639.0	10.40	315.40	1,629.0	100.8	-92.9	137.1	0.37	-0.32	-0.97
1,671.0	10.60	316.70	1,660.5	105.0	-97.0	142.9	0.97	0.63	4.06
1,702.0	10.68	314.88	1,690.9	109.1	-101.0	148.7	1.11	0.26	-5.87
1,734.0	10.70	317.30	1,722.4	113.4	-105.1	154.6	1.40	0.06	7.56
1,766.0	10.50	313.30	1,753.8	117.6	-109.2	160.5	2.38	-0.63	-12.50
1,798.0	10.30	313.70	1,785.3	121.5	-113.4	166.2	0.66	-0.63	1.25
1,830.0	10.60	314.50	1,816.8	125.6	-117.6	172.0	1.04	0.94	2.50
1,861.0	10.60	315.40	1,847.2	129.6	-121.6	177.7	0.53	0.00	2.90
1,893.0	10.90	315.00	1,878.7	133.8	-125.8	183.7	0.97	0.94	-1.25
1,925.0	10.60	316.20	1,910.1	138.1	-130.0	189.7	1.17	-0.94	3.75
1,956.0	10.60	316.90	1,940.6	142.3	-133.9	195.4	0.42	0.00	2.26
1,988.0	10.70	318.10	1,972.0	146.6	-137.9	201.3	0.76	0.31	3.75
2,020.0	10.60	318.00	2,003.5	151.0	-141.9	207.2	0.32	-0.31	-0.31
2,051.0	10.50	320.30	2,034.0	155.3	-145.6	212.9	1.40	-0.32	7.42
2,083.0	10.80	321.10	2,065.4	159.9	-149.3	218.8	1.05	0.94	2.50
2,114.0	10.80	321.70	2,095.9	164.4	-152.9	224.6	0.36	0.00	1.94
2,146.0	10.90	323.10	2,127.3	169.2	-156.6	230.6	0.88	0.31	4.38
2,178.0	11.20	321.90	2,158.7	174.1	-160.4	236.7	1.18	0.94	-3.75
2,210.0	11.20	321.30	2,190.1	178.9	-164.2	242.9	0.36	0.00	-1.88
2,241.0	11.40	320.20	2,220.5	183.6	-168.1	248.9	0.95	0.65	-3.55
2,273.0	11.56	318.80	2,251.8	188.5	-172.2	255.3	1.00	0.50	-4.38
2,304.0	11.60	316.90	2,282.2	193.1	-176.4	261.5	1.24	0.13	-6.13
2,336.0	11.29	317.90	2,313.6	197.8	-180.7	267.9	1.15	-0.97	3.13
2,368.0	11.20	316.60	2,345.0	202.3	-184.9	274.1	0.84	-0.28	-4.06



**Company:** NEWFIELD EXPLORATION  
**Project:** USGS Myton SW (UT)  
**Site:** SECTION 2 T9S, R17E  
**Well:** D-2-9-17  
**Wellbore:** Wellbore #1  
**Design:** Actual

**Local Co-ordinate Reference:** Well D-2-9-17  
**TVD Reference:** D-2-9-17 @ 5031.0ft (Newfield Rig #2)  
**MD Reference:** D-2-9-17 @ 5031.0ft (Newfield Rig #2)  
**North Reference:** True  
**Survey Calculation Method:** Minimum Curvature  
**Database:** EDM 2003.21 Single User Db

**Survey**

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
2,399.0	11.20	316.50	2,375.4	206.7	-189.0	280.1	0.06	0.00	-0.32
2,431.0	10.70	315.60	2,406.8	211.1	-193.3	286.2	1.65	-1.56	-2.81
2,463.0	10.70	315.70	2,438.2	215.3	-197.4	292.1	0.06	0.00	0.31
2,495.0	11.00	314.75	2,469.7	219.6	-201.7	298.2	1.09	0.94	-2.97
2,526.0	11.20	313.70	2,500.1	223.8	-205.9	304.1	0.92	0.65	-3.39
2,558.0	11.10	313.10	2,531.5	228.0	-210.4	310.3	0.48	-0.31	-1.88
2,590.0	10.80	311.90	2,562.9	232.1	-214.9	316.3	1.18	-0.94	-3.75
2,621.0	10.70	311.10	2,593.3	236.0	-219.2	322.1	0.58	-0.32	-2.58
2,653.0	10.70	311.90	2,624.8	239.9	-223.7	328.0	0.46	0.00	2.50
2,685.0	10.50	312.10	2,656.2	243.8	-228.1	333.9	0.64	-0.63	0.63
2,716.0	10.50	312.10	2,686.7	247.6	-232.3	339.5	0.00	0.00	0.00
2,748.0	10.20	311.90	2,718.2	251.5	-236.5	345.2	0.94	-0.94	-0.63
2,780.0	10.20	312.70	2,749.7	255.3	-240.7	350.9	0.44	0.00	2.50
2,812.0	10.40	313.70	2,781.2	259.2	-244.9	356.6	0.84	0.63	3.13
2,843.0	10.66	314.77	2,811.7	263.2	-249.0	362.2	1.05	0.84	3.45
2,875.0	10.70	313.70	2,843.1	267.3	-253.2	368.2	0.63	0.13	-3.34
2,907.0	10.50	315.10	2,874.6	271.4	-257.4	374.0	1.02	-0.63	4.38
2,938.0	10.70	317.04	2,905.0	275.5	-261.4	379.7	1.32	0.65	6.26
2,970.0	10.90	317.60	2,936.5	279.9	-265.4	385.7	0.71	0.63	1.75
3,002.0	10.90	320.00	2,967.9	284.5	-269.4	391.8	1.42	0.00	7.50
3,034.0	11.12	321.17	2,999.3	289.2	-273.3	397.9	0.98	0.69	3.66
3,065.0	11.60	322.80	3,029.7	294.0	-277.1	404.0	1.86	1.55	5.26
3,097.0	11.90	324.60	3,061.0	299.3	-280.9	410.4	1.48	0.94	5.63
3,128.0	12.30	324.50	3,091.3	304.6	-284.7	416.9	1.29	1.29	-0.32
3,160.0	11.90	324.90	3,122.6	310.0	-288.6	423.5	1.28	-1.25	1.25
3,192.0	12.10	324.10	3,153.9	315.4	-292.4	430.1	0.81	0.63	-2.50
3,224.0	11.30	324.70	3,185.3	320.7	-296.2	436.6	2.53	-2.50	1.88
3,256.0	11.40	324.60	3,216.6	325.9	-299.8	442.8	0.32	0.31	-0.31
3,288.0	11.70	323.00	3,248.0	331.0	-303.6	449.2	1.37	0.94	-5.00
3,319.0	12.30	322.00	3,278.3	336.2	-307.5	455.6	1.99	1.94	-2.26
3,351.0	12.20	322.00	3,309.6	341.5	-311.7	462.4	0.37	-0.31	-0.94
3,382.0	12.00	320.00	3,339.9	346.6	-315.8	468.8	1.50	-0.65	-6.45
3,414.0	12.10	318.90	3,371.2	351.6	-320.1	475.5	0.78	0.31	-3.44
3,446.0	11.70	317.90	3,402.5	356.6	-324.5	482.1	1.41	-1.25	-3.13
3,477.0	11.70	317.30	3,432.8	361.2	-328.8	488.4	0.39	0.00	-1.94
3,509.0	11.40	316.40	3,464.2	365.9	-333.1	494.8	1.09	-0.94	-2.81
3,541.0	11.20	317.90	3,495.6	370.5	-337.4	501.1	1.11	-0.63	4.69
3,572.0	11.40	317.30	3,526.0	375.0	-341.5	507.1	0.75	0.65	-1.94
3,604.0	11.30	317.70	3,557.4	379.6	-345.7	513.4	0.40	-0.31	1.25
3,636.0	11.30	318.40	3,588.7	384.3	-349.9	519.7	0.43	0.00	2.19
3,667.0	11.20	318.70	3,619.1	388.8	-353.9	525.8	0.37	-0.32	0.97
3,699.0	10.80	319.00	3,650.6	393.4	-358.0	531.9	1.26	-1.25	0.94
3,730.0	10.40	317.70	3,681.0	397.7	-361.7	537.6	1.50	-1.29	-4.19
3,762.0	10.24	314.58	3,712.5	401.8	-365.7	543.3	1.82	-0.50	-9.75
3,794.0	10.10	315.40	3,744.0	405.8	-369.7	548.9	0.63	-0.44	2.56
3,826.0	9.80	315.40	3,775.5	409.7	-373.6	554.5	0.94	-0.94	0.00
3,857.0	9.80	317.50	3,806.1	413.6	-377.2	559.7	1.15	0.00	6.77
3,889.0	9.70	318.50	3,837.6	417.6	-380.9	565.2	0.61	-0.31	3.13
3,921.0	10.10	319.60	3,869.1	421.7	-384.5	570.7	1.38	1.25	3.44
3,952.0	10.50	316.80	3,899.6	425.9	-388.2	576.2	2.07	1.29	-9.03
3,984.0	10.80	315.80	3,931.1	430.1	-392.2	582.1	1.10	0.94	-3.13
4,015.0	10.90	315.60	3,961.5	434.3	-396.3	587.9	0.34	0.32	-0.65
4,047.0	10.80	315.10	3,993.0	438.6	-400.6	594.0	0.43	-0.31	-1.56
4,079.0	11.10	315.50	4,024.4	442.9	-404.8	600.0	0.97	0.94	1.25

Survey Report

Company: NEWFIELD EXPLORATION  
 Project: USGS Myton SW (UT)  
 Site: SECTION 2 T9S, R17E  
 Well: D-2-9-17  
 Wellbore: Wellbore #1  
 Design: Actual

Local Co-ordinate Reference:  
 TVD Reference:  
 MD Reference:  
 North Reference:  
 Survey Calculation Method:  
 Database:

Well D-2-9-17  
 D-2-9-17 @ 5031.0ft (Newfield Rig #2)  
 D-2-9-17 @ 5031.0ft (Newfield Rig #2)  
 True  
 Minimum Curvature  
 EDM 2003.21 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,110.0	10.90	315.40	4,054.8	447.1	-409.0	606.0	0.65	-0.65	-0.32
4,142.0	10.50	315.70	4,086.2	451.4	-413.1	611.9	1.26	-1.25	0.94
4,174.0	10.33	316.11	4,117.7	455.5	-417.2	617.7	0.58	-0.53	1.28
4,205.0	10.40	315.20	4,148.2	459.5	-421.1	623.3	0.57	0.23	-2.94
4,237.0	9.80	315.00	4,179.7	463.5	-425.0	628.9	1.88	-1.88	-0.63
4,269.0	9.80	315.10	4,211.2	467.4	-428.9	634.3	0.05	0.00	0.31
4,300.0	9.60	315.20	4,241.8	471.1	-432.6	639.5	0.65	-0.65	0.32
4,332.0	9.60	315.00	4,273.4	474.8	-436.3	644.9	0.10	0.00	-0.63
4,364.0	9.80	314.90	4,304.9	478.6	-440.1	650.2	0.63	0.63	-0.31
4,396.0	9.90	313.40	4,336.4	482.5	-444.1	655.7	0.86	0.31	-4.69
4,427.0	9.70	314.00	4,367.0	486.1	-447.9	661.0	0.72	-0.65	1.94
4,459.0	9.70	314.60	4,398.5	489.9	-451.7	666.4	0.32	0.00	1.88
4,490.0	9.50	315.70	4,429.1	493.5	-455.4	671.5	0.88	-0.65	3.55
4,522.0	9.50	316.50	4,460.6	497.3	-459.0	676.8	0.41	0.00	2.50
4,553.0	9.30	315.90	4,491.2	501.0	-462.6	681.9	0.72	-0.65	-1.94
4,585.0	9.50	315.90	4,522.8	504.7	-466.2	687.1	0.63	0.63	0.00
4,617.0	9.60	317.60	4,554.4	508.6	-469.8	692.4	0.94	0.31	5.31
4,648.0	9.70	315.50	4,584.9	512.4	-473.4	697.6	1.18	0.32	-6.77
4,680.0	9.80	316.00	4,616.5	516.3	-477.2	703.0	0.41	0.31	1.56
4,712.0	9.80	314.44	4,648.0	520.1	-481.0	708.5	0.83	0.00	-4.88
4,743.0	9.80	313.30	4,678.5	523.8	-484.8	713.7	0.63	0.00	-3.68
4,775.0	9.60	312.70	4,710.1	527.5	-488.8	719.1	0.70	-0.63	-1.88
4,807.0	9.80	313.60	4,741.6	531.2	-492.7	724.5	0.78	0.63	2.81
4,839.0	10.40	314.70	4,773.1	535.1	-496.7	730.1	1.97	1.88	3.44
4,870.0	10.40	316.70	4,803.6	539.1	-500.6	735.7	1.16	0.00	6.45
4,902.0	10.10	317.00	4,835.1	543.2	-504.5	741.4	0.95	-0.94	0.94
4,934.0	9.90	315.80	4,866.6	547.2	-508.4	746.9	0.90	-0.63	-3.75
4,965.0	9.40	317.00	4,897.2	551.0	-511.9	752.1	1.74	-1.61	3.87
4,997.0	9.00	317.70	4,928.8	554.8	-515.4	757.2	1.30	-1.25	2.19
5,029.0	9.00	317.30	4,960.4	558.5	-518.8	762.2	0.20	0.00	-1.25
5,060.0	8.70	317.00	4,991.0	562.0	-522.0	767.0	0.98	-0.97	-0.97
5,092.0	8.20	314.50	5,022.7	565.3	-525.3	771.7	1.94	-1.56	-7.81
5,124.0	8.10	315.20	5,054.3	568.5	-528.5	776.3	0.44	-0.31	2.19
5,156.0	8.50	314.30	5,086.0	571.8	-531.8	780.9	1.31	1.25	-2.81
5,187.0	9.10	311.70	5,116.6	575.0	-535.3	785.6	2.32	1.94	-8.39
5,219.0	9.10	311.60	5,148.2	578.4	-539.1	790.6	0.05	0.00	-0.31
5,251.0	9.50	313.40	5,179.8	581.9	-542.9	795.8	1.55	1.25	5.63
5,283.0	9.40	314.80	5,211.4	585.5	-546.6	801.0	0.78	-0.31	4.38
5,314.0	9.40	315.20	5,242.0	589.1	-550.2	806.1	0.21	0.00	1.29
5,346.0	9.80	315.60	5,273.5	592.9	-554.0	811.4	1.27	1.25	1.25
5,378.0	10.00	316.10	5,305.0	596.9	-557.8	816.9	0.68	0.63	1.56
5,409.0	9.90	317.10	5,335.6	600.7	-561.5	822.3	0.64	-0.32	3.23
5,441.0	10.10	317.00	5,367.1	604.8	-565.3	827.8	0.63	0.63	-0.31
5,473.0	10.10	320.00	5,398.6	609.0	-569.0	833.4	1.64	0.00	9.38
5,505.0	10.10	319.30	5,430.1	613.3	-572.6	839.1	0.38	0.00	-2.19
5,536.0	9.84	318.84	5,460.6	617.3	-576.1	844.4	0.88	-0.84	-1.48
5,568.0	9.90	319.60	5,492.1	621.5	-579.7	849.9	0.45	0.19	2.38
5,600.0	9.36	320.82	5,523.7	625.6	-583.1	855.2	1.80	-1.69	3.81
5,631.0	9.10	318.30	5,554.3	629.4	-586.4	860.2	1.55	-0.84	-8.13
5,662.0	8.80	316.50	5,584.9	632.9	-589.6	865.0	1.32	-0.97	-5.81
5,694.0	8.70	317.90	5,616.5	636.5	-592.9	869.9	0.74	-0.31	4.38
5,726.0	9.20	315.50	5,648.2	640.1	-596.4	874.9	1.95	1.56	-7.50
5,758.0	9.00	314.80	5,679.8	643.7	-599.9	879.9	0.71	-0.63	-2.19
5,789.0	9.20	312.20	5,710.4	647.1	-603.5	884.8	1.47	0.65	-8.39



PayZone Directional Services, LLC.



Survey Report

Company: NEWFIELD EXPLORATION  
 Project: USGS Myton SW (UT)  
 Site: SECTION 2 T9S, R17E  
 Well: D-2-9-17  
 Wellbore: Wellbore #1  
 Design: Actual

Local Co-ordinate Reference:  
 TVD Reference:  
 MD Reference:  
 North Reference:  
 Survey Calculation Method:  
 Database:

Well D-2-9-17  
 D-2-9-17 @ 5031.0ft (Newfield Rig #2)  
 D-2-9-17 @ 5031.0ft (Newfield Rig #2)  
 True  
 Minimum Curvature  
 EDM 2003.21 Single User Db

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,821.0	8.70	310.27	5,742.0	650.4	-607.2	889.8	1.82	-1.56	-6.03
5,853.0	8.60	309.40	5,773.6	653.5	-610.9	894.6	0.51	-0.31	-2.72
5,884.0	7.95	308.73	5,804.3	656.3	-614.4	899.0	2.12	-2.10	-2.16
5,916.0	8.26	307.77	5,836.0	659.1	-617.9	903.4	1.06	0.97	-3.00
5,948.0	8.04	305.83	5,867.6	661.8	-621.6	907.9	1.10	-0.69	-6.06
5,979.0	7.65	305.74	5,898.4	664.3	-625.0	912.0	1.26	-1.26	-0.29
6,011.0	6.90	306.80	5,930.1	666.7	-628.3	916.0	2.38	-2.34	3.31
6,043.0	6.37	303.28	5,961.9	668.8	-631.3	919.6	2.09	-1.66	-11.00
6,074.0	5.84	302.76	5,992.7	670.6	-634.0	922.8	1.72	-1.71	-1.68
6,106.0	5.98	299.68	6,024.5	672.3	-636.9	926.0	1.08	0.44	-9.63
6,138.0	5.01	301.26	6,056.4	673.8	-639.5	928.9	3.07	-3.03	4.94
6,157.0	5.05	299.77	6,075.3	674.7	-640.9	930.5	0.72	0.21	-7.84
6,212.0	5.05	299.77	6,130.1	677.1	-645.1	935.1	0.00	0.00	0.00

D-2-9-17 TGT

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (ft)	Easting (ft)	Latitude	Longitude
D-2-9-17 NO GO ZONE	0.00	0.00	0.0	0.0	0.0	7,196,043.05	2,067,109.95	40° 3' 54.060 N	109° 58' 31.150 W
- actual wellpath hits target center									
- Polygon									
Point 1			0.0	809.0	-451.0	7,196,844.24	2,066,645.22		
Point 2			0.0	809.0	-851.0	7,196,837.42	2,066,245.28		
Point 3			0.0	809.0	-451.0	7,196,844.24	2,066,645.22		
D-2-9-17 TGT	0.00	0.00	6,250.0	702.3	-651.7	7,196,734.15	2,066,446.36	40° 4' 1.001 N	109° 58' 39.533 W
- actual wellpath misses target center by 122.7ft at 6212.0ft MD (6130.1 TVD, 677.1 N, -645.1 E)									
- Circle (radius 75.0)									

Checked By: \_\_\_\_\_ Approved By: \_\_\_\_\_ Date: \_\_\_\_\_





Project: USGS Myton SW (UT)  
 Site: SECTION 2 T9S, R17E  
 Well: D-2-9-17  
 Wellbore: Wellbore #1  
 SURVEY: Actual

FINAL SURVEY REPORT



Azimuths to True North  
 Magnetic North: 11.30°

Magnetic Field  
 Strength: 52316.5snT  
 Dip Angle: 65.83°  
 Date: 2011/04/06  
 Model: IGRF2010

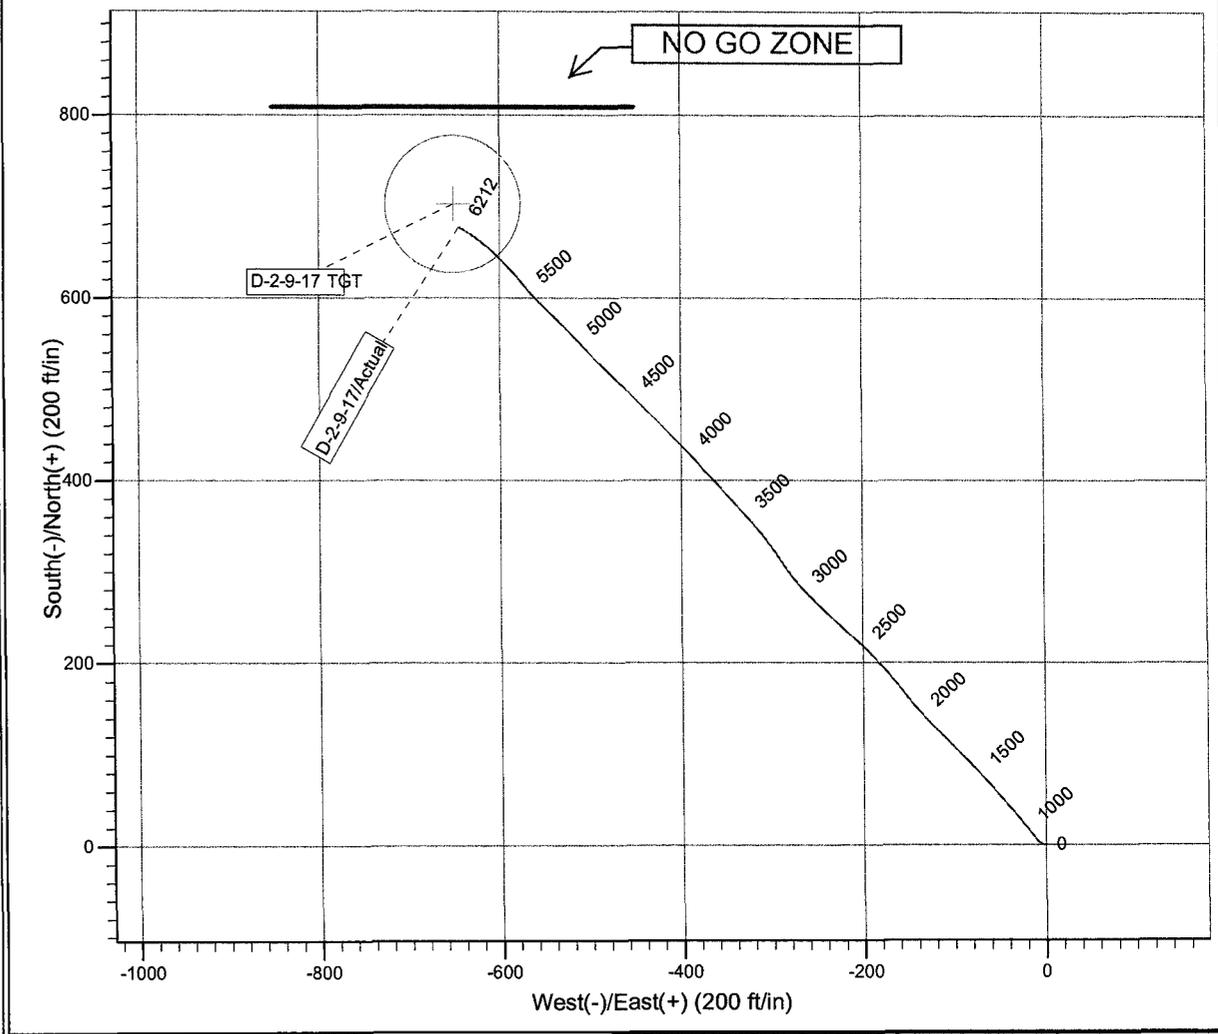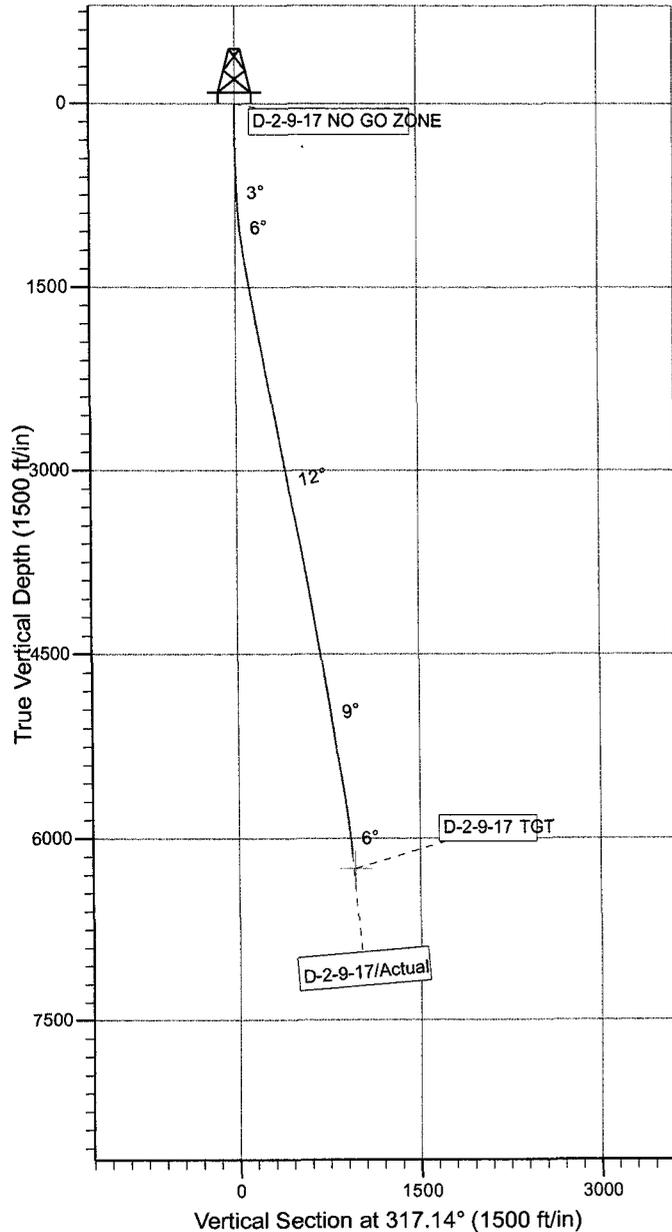

Design: Actual (D-2-9-17/Wellbore #1)

Created By: Sarah Webb Date: 19:04, August 16 2011  
 THIS SURVEY IS CORRECT TO THE BEST OF MY  
 KNOWLEDGE AND IS SUPPORTED BY ACTUAL FIELD DATA.



## Daily Activity Report

**Format For Sundry**

**GMBU D-2-9-17**

**6/1/2011 To 10/30/2011**

**GMBU D-2-9-17**

**Waiting on Cement**

**Date:** 7/29/2011

Ross #21 at 325. Days Since Spud - On 7/28/11 Ross #21 spud and drilled 325' of 12 1/4" hole, P/U and run 7 jts of 8 5/8" casing set - 323.42'KB. On 7/29/11 cement w/BJ w/160 sks of class G+2%kcl+.25#CF mixed @ 15.8ppg and 1.17 - yield. Returned 5 bbls to pit, bump plug to 476 psi, BLM and State were notified of spud via email.

**Daily Cost:** \$0

**Cumulative Cost:** \$64,908

**GMBU D-2-9-17**

**Waiting on Cement**

**Date:** 8/11/2011

NDSI #2 at 325. 0 Days Since Spud - Tear down and move rig

**Daily Cost:** \$0

**Cumulative Cost:** \$66,366

**GMBU D-2-9-17**

**Drill 7 7/8" hole with fresh water**

**Date:** 8/12/2011

NDSI #2 at 1472. 1 Days Since Spud - Move rig w/ Liddel Trucking, set equipment and rig up - R/U B&C Quicktest, test kelly, pipe&blind rams, choke to 2000#/10 min and casing to 1500#/30 min - Work on mud pump, (sucked up piece of a glove in the valve) - Drill 7 7/8" hole F/ 277' to 1472' w/ 18K WOB, TRPM-184, GPM-409, Avg ROP- 100 ft/hr - NO H2S or flow in last 24 hours - P/U bit, mud motor, scribe directional tools, and HWDP and tag @ 277'

**Daily Cost:** \$0

**Cumulative Cost:** \$106,119

**GMBU D-2-9-17**

**Drill 7 7/8" hole with fresh water**

**Date:** 8/13/2011

NDSI #2 at 3784. 2 Days Since Spud - Drill 7 7/8" hole F/ 2359' to 3784' w/ 20K WOB, TRPM-184, GPM-409, Avg ROP- 86 ft/hr - Rig Service, function test Crownomatic and BOP - Drill 7 7/8" hole F/ 1472' to 2359' w/ 20K WOB, TRPM-184, GPM-409, Avg ROP-127 ft/hr - NO H2S or flow in last 24 hours

**Daily Cost:** \$0

**Cumulative Cost:** \$126,118

**GMBU D-2-9-17**

**Drill 7 7/8" hole with fresh water**

**Date:** 8/14/2011

NDSI #2 at 5526. 3 Days Since Spud - Drill 7 7/8" hole F/ 3784' to 4070' w/ 20K WOB, TRPM-180, GPM-400, Avg ROP-114 ft/hr - NO H2S reported in last 24 hours, Well flowing 4gal/min - Drill 7 7/8" hole f/ 4070' to 5526' w/ 20K WOB, TRPM-180, GPM-400, Avg ROP-69 ft/hr - Rig Service, function test Crownomatic and BOP

**Daily Cost:** \$0

**Cumulative Cost:** \$178,283

**GMBU D-2-9-17**

**Circulate & Condition Hole**

**Date:** 8/15/2011

NDSI #2 at 6212. 4 Days Since Spud - Drill 7 7/8" hole F/ 5875' to 6212' w/ 20K WOB,TRPM-180,GPM-400,Avg ROP-112 ft/hr - Land w/ mandril and landing joint, lay down landing joint - Circulate casing and rig up BJ, hold safety meeting w/ BJ - R/U B&C quicktest and test 5.5" casing rams to 2000#/10 /min - Drill 7 7/8" hole F/ 5526' to 5875' w/ 20K WOB,TRPM-180,GPM-400,Avg ROP-88 ft/hr - R/U Loggers and log flrom 6212' to surface ( gamma ray,desity Neutron) - Lay down drill pipe and BHA - Pump 320 bbls of 9.9lb brine to kill 5 gal/min flow - Lay down drill pipe to 4000' - Circulate and condintion hole for lay down to log - R/U and run 142 jts. Of 5.5" ,J-55,15.5# LTC set @ 6200.59', Flag joint @ 3595.92', (includes flag) - Rig Service , check crownomatic and BOP

**Daily Cost:** \$0

**Cumulative Cost:** \$231,531

---

**GMBU D-2-9-17**

**Rigging down**

**Date:** 8/16/2011

NDSI #2 at 6212. 5 Days Since Spud - of fresh, returned 20 bbls to pit, bump plug to 1600#, BLM and State were notified via email - Clean mud tanks - Circulate casing - Cement w/ BJ w/ 250 sks of lead @11ppg &3.53yield (PL II+.05#SF+3%KCL+.5#CF+2#Kol Seal) followed by - 400 sks of tail @14.4ppg and 1.24 yield (50:50:2+3%KCL+.25#CF+.05#SF+.5%EC-1) displace w/ 146.5 bbls **Finalized**

**Daily Cost:** \$0

**Cumulative Cost:** \$346,963

---

**Pertinent Files: Go to File List**