


STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT ☐

APPLICATION FOR PERMIT TO DRILL						1. WELL NAME and NUMBER NBU 1022-1211BS							
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>						3. FIELD OR WILDCAT NATURAL BUTTES							
4. TYPE OF WELL Gas Well Coalbed Methane Well: NO						5. UNIT or COMMUNITIZATION AGREEMENT NAME NATURAL BUTTES							
6. NAME OF OPERATOR KERR-MCGEE OIL & GAS ONSHORE, L.P.						7. OPERATOR PHONE 720 929-6515							
8. ADDRESS OF OPERATOR P.O. Box 173779, Denver, CO, 80217						9. OPERATOR E-MAIL julie.jacobson@anadarko.com							
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) UT ST UO 01997-A ST				11. MINERAL OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>				12. SURFACE OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>					
13. NAME OF SURFACE OWNER (if box 12 = 'fee')						14. SURFACE OWNER PHONE (if box 12 = 'fee')							
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')						16. SURFACE OWNER E-MAIL (if box 12 = 'fee')							
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')				18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input checked="" type="checkbox"/> (Submit Commingling Application) NO <input type="checkbox"/>				19. SLANT VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/>					
20. LOCATION OF WELL		FOOTAGES		QTR-QTR		SECTION		TOWNSHIP		RANGE		MERIDIAN	
LOCATION AT SURFACE		2350 FSL 974 FEL		NESE		12		10.0 S		22.0 E		S	
Top of Uppermost Producing Zone		2568 FSL 492 FEL		NESE		12		10.0 S		22.0 E		S	
At Total Depth		2568 FSL 492 FEL		NESE		12		10.0 S		22.0 E		S	
21. COUNTY UINTAH				22. DISTANCE TO NEAREST LEASE LINE (Feet) 492				23. NUMBER OF ACRES IN DRILLING UNIT 1674					
				25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 614				26. PROPOSED DEPTH MD: 8475 TVD: 8416					
27. ELEVATION - GROUND LEVEL 5224				28. BOND NUMBER 22013542				29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 43-8496					
Hole, Casing, and Cement Information													
String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement		Sacks	Yield	Weight		
Surf	11	8.625	0 - 2170	28.0	J-55 LT&C	0.2	Type V		180	1.15	15.8		
							Class G		270	1.15	15.8		
Prod	7.875	4.5	0 - 8475	11.6	I-80 LT&C	12.5	Premium Lite High Strength		270	3.38	11.0		
							50/50 Poz		1160	1.31	14.3		
ATTACHMENTS													
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES													
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER							<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN						
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)							<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER						
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)							<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP						
NAME Gina Becker				TITLE Regulatory Analyst II				PHONE 720 929-6086					
SIGNATURE				DATE 09/13/2011				EMAIL gina.becker@anadarko.com					
API NUMBER ASSIGNED 43047519760000				APPROVAL  Permit Manager									

RECEIVED: December 19, 2011

Kerr-McGee Oil & Gas Onshore. L.P.**NBU 1022-12I1BS**

Surface:	2350 FSL / 974 FEL	NESE
BHL:	2568 FSL / 492 FEL	NESE

Section 12 T10S R22E

Uintah County, Utah
Mineral Lease: UT ST UO 01197-A ST**ONSHORE ORDER NO. 1****DRILLING PROGRAM**

1. & 2. **Estimated Tops of Important Geologic Markers:**
Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

<u>Formation</u>	<u>Depth</u>	<u>Resource</u>
Uinta	0 - Surface	
Green River	1139	
Birds Nest	1351	Water
Mahogany	1723	Water
Wasatch	4087	Gas
Mesaverde	6251	Gas
MVU2	7214	Gas
MVL1	7779	Gas
TVD	8416	
TD	8475	

3. **Pressure Control Equipment** (Schematic Attached)

Please refer to the attached Drilling Program

4. **Proposed Casing & Cementing Program:**

Please refer to the attached Drilling Program

5. **Drilling Fluids Program:**

Please refer to the attached Drilling Program

6. **Evaluation Program:**

Please refer to the attached Drilling Program

7. **Abnormal Conditions:**

Maximum anticipated bottom hole pressure calculated at 8416' TVD, approximately equals
5,386 psi (0.64 psi/ft = actual bottomhole gradient)

Maximum Anticipated Bottom Hole Pressure (MABHP) = Pore Pressure at TD

Maximum anticipated surface pressure equals approximately 3,523 psi (bottom hole pressure
minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot, per Onshore Order No. 2).

Per Onshore Order No. 2 - Max Anticipated Surf. Press.(MASP) = (Pore Pressure at next csg point-
(0.22 psi/ft-partial evac gradient x TVD of next csg point))

8. **Anticipated Starting Dates:**

Drilling is planned to commence immediately upon approval of this application.

9. **Variances:**

Please refer to the attached Drilling Program.

Onshore Order #2 – Air Drilling Variance

Kerr-McGee Oil & Gas Onshore LP (KMG) respectfully requests a variance to several requirements associated with air drilling outlined in Onshore Order 2

- *Blowout Prevention Equipment (BOPE) requirements;*
- *Mud program requirements; and*
- *Special drilling operation (surface equipment placement) requirements associated with air drilling.*

This Standard Operating Practices addendum provides supporting information as to why KMG current air drilling practices for constructing the surface casing hole should be granted a variance to Onshore Order 2 air drilling requirements.

The reader should note that the air rig is used only to construct a stable surface casing hole through a historically difficult lost circulation zone. A conventional rotary rig follows the air rig, and is used to drill and construct the majority of the wellbore.

More notable, KMG has used the air rig layout and procedures outlined below to drill the surface casing hole in approximately 675 wells without incident of blow out or loss of life.

Background

In a typical well, KMG utilizes an air rig for drilling the surface casing hole, an interval from the surface to surface casing depths, which varies in depth from 1,700 to 2,800 feet. The air rig drilling operation does not drill through productive or over pressured formations in KMG field, but does penetrate the Uinta and Green River Formations. The purpose of the air drilling operation is to overcome the severe loss circulation zone in the Green River known as the Bird's Nest while creating a stable hole for the surface casing. The surface casing hole is generally drilled to approximately 500 feet below the Bird's Nest.

Before the surface air rig is mobilized, a rathole rig is utilized to set and cement conductor pipe through a competent surface formation. Generally, the conductor is set at 40 feet. In some cases, conductor may be set deeper in areas that the surface formation is not found competent. This rig also drills the rat and mouse holes in preparation for the surface casing and production string drilling operations.

The air rig is then mobilized to drill the surface casing hole by drilling a 11 inch hole to just above the Bird's Nest interval with an air hammer. The hammer is then tripped and replaced with a 11 inch tri-cone bit. The tri-cone bit is used to drill to the surface casing point, approximately 500 feet below the loss circulation zone (Bird's Nest). The 8-5/8 inch surface casing is then run and cemented in place, thereby isolating the lost circulation zone.

KMG fully appreciates Onshore Order 2 well control and safety requirements associated with a typical air drilling operations. However, the requirements of Onshore Order 2 are excessive with respect to the air rig layout and drilling operation procedures that are currently in practice to drill and control the surface casing hole in KMG Fields.

Variance for BOPE Requirements

The air rig operation utilizes a properly lubricated and maintained air bowl diverter system which diverts the drilling returns to a six-inch blooie line. The air bowl is the only piece of BOPE equipment which is installed during drilling operations and is sufficient to contain the air returns associated with this drilling operation. As was discussed earlier, the drilling of the surface hole does not encounter any over pressured or productive zones, and as a result standard BOPE equipment should not be required. In addition, standard drilling practices do not support the use of BOPE on 40 feet of conductor pipe.

Variance for Mud Material Requirements

Onshore Order 2 also states that sufficient quantities of mud materials shall be maintained or readily accessible for the purpose of assuring adequate well control. Once again, the surface hole drilling operations does not encounter over pressured or productive intervals, and as a result there is not a need to control pressure in the surface hole with a mud system. Instead of mud, the air rigs utilize water from the reserve pit for well control, if necessary. A skid pump which is located near the reserve pit (see attachment) will supply the water to the well bore.

Variance for Special Drilling Operation (surface equipment placement) Requirements

Onshore Order 2 requires specific safety distances or setbacks for the placement of associated standard air drilling equipment, wellbore, and reserve pits. The air rigs used to drill the surface holes are not typical of an air rig used to drill a producing hole in other parts of the US. These are smaller in nature and designed to fit a KMG location. The typical air rig layout for drilling surface hole in the field is attached.

Typically the blooie line discharge point is required to be 100 feet from the well bore. In the case of a KMG well, the reserve pit is only 45 feet from the rig and is used for the drill cuttings. The blooie line, which transports the drill cuttings from the well to the reserve pit, subsequently discharges only 45 feet from the well bore.

Typically the air rig compressors are required to be located in the opposite direction from the blooie line and a minimum of 100 feet from the well bore. At the KMG locations, the air rig compressors are approximately 40 feet from the well bore and approximately 60 feet from the blooie line discharge due to the unique air rig design. The air compressors (see attachment) are located on the rig (1250 cfm) and

on a standby trailer (1170 cfm). A booster sits between the two compressors and boosts the output from 350 psi to 2000 psi. The design does put the booster and standby compressor opposite from the blooie line.

Lastly, Onshore Order 2 addresses the need for an automatic igniter or continuous pilot light on the blooie line. The air rig does not utilize an igniter as the surface hole drilling operation does not encounter productive formations.

Conclusion

The air rig operating procedures and the attached air rig layout have effectively maintained well control while drilling the surface holes in KMG Fields. KMG respectfully requests a variance from Onshore Order 2 with respect to air drilling well control requirements as discussed above.

10. **Other Information:**

Please refer to the attached Drilling Program.

COMPANY NAME	KERR-McGEE OIL & GAS ONSHORE LP					DATE	September 7, 2011		
WELL NAME	NBU 1022-1211BS					TD	8,416'	TVD	8,475' MD
FIELD	Natural Buttes		COUNTY	Uintah	STATE	Utah	FINISHED ELEVATION		5224
SURFACE LOCATION	NESE	2350 FSL	974 FEL	Sec 12	T 10S	R 22E			
	Latitude:	39.962665	Longitude:	-109.381655	NAD 27				
BTM HOLE LOCATION	NESE	2568 FSL	492 FEL	Sec 12	T 10S	R 22E			
	Latitude:	39.963260	Longitude:	-109.379932	NAD 27				
OBJECTIVE ZONE(S)	Wasatch/Mesaverde								
ADDITIONAL INFO	Regulatory Agencies: UDOGM (Minerals), UDOGM (Surface), UDOGM Tri-County Health Dept.								

NBU 1022-12I Pad- Drilling Program Approved- 090711.xls

090711.xls
RECEIVED: September 13, 2011



KERR-McGEE OIL & GAS ONSHORE LP

DRILLING PROGRAM

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS		
						BURST	LTC	BTC
CONDUCTOR	14"	0-40'						
						3,390	1,880	348,000
SURFACE	8-5/8"	0 to 2,170	28.00	IJ-55	LTC	2.49	1.85	6.54
						7,780	6,350	279,000
PRODUCTION	4-1/2"	0 to 8,475	11.60	I-80	LTC/BTC	1.11	1.16	3.51

Surface Casing:

(Burst Assumptions: TD = 12.5 ppg)

0.73 psi/ft = frac gradient @ surface shoe

Fracture at surface shoe with 0.1 psi/ft gas gradient above

(Collapse Assumption: Fully Evacuated Casing, Max MW)

(Tension Assumptions: Air Weight of Casing*Buoys.Fact. of water)

Production casing:

(Burst Assumptions: Pressure test with 8.4ppg @ 7000 psi)

0.64 psi/ft = bottomhole gradient

(Collapse Assumption: Fully Evacuated Casing, Max MW)

(Tension Assumptions: Air Weight of Casing*Buoys.Fact. of water)

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	LEAD	500'	Premium cmt + 2% CaCl	180	60%	15.80	1.15
Option 1			+ 0.25 pps flocele				
	TOP OUT CMT (6 jobs)	1,200'	20 gals sodium silicate + Premium cmt	270	0%	15.80	1.15
			+ 2% CaCl + 0.25 pps flocele				
SURFACE		NOTE: If well will circulate water to surface, option 2 will be utilized					
Option 2	LEAD	1,670'	65/35 Poz + 6% Gel + 10 pps gilsonite	160	35%	11.00	3.82
			+ 0.25 pps Flocele + 3% salt BWOW				
	TAIL	500'	Premium cmt + 2% CaCl	150	35%	15.80	1.15
			+ 0.25 pps flocele				
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.80	1.15
PRODUCTION	LEAD	3,585'	Premium Lite II +0.25 pps	270	20%	11.00	3.38
			celloflake + 5 pps gilsonite + 10% gel				
			+ 0.5% extender				
	TAIL	4,890'	50/50 Poz/G + 10% salt + 2% gel	1,160	35%	14.30	1.31
			+ 0.1% R-3				

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained

*Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe
PRODUCTION	Float shoe, 1 jt, float collar. No centralizers will be used.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 5M with one annular and 2 rams. The BOPE will be installed before the production hole is drilled and tested to 5,000 psi (annular to 2,500 psi) prior to drilling out the surface casing shoe. Record on chart recorder and tour sheet. Function test rams on each trip. Maintain safety valve and inside BOP on rig floor at all times. Most rigs have top drives; however, if used, the Kelly is to be equipped with upper and lower kelly valves.

Surveys will be taken at 1,000' minimum intervals.

Most rigs have PVT System for mud monitoring. If no PVT is available, visual monitoring will be utilized.

DRILLING ENGINEER:

Nick Spence / Danny Showers

DATE:**DRILLING SUPERINTENDENT:**

Kenny Gathings / Lovel Young

DATE:

EXHIBIT A
NBU 1022-1211BS



SCHEMATIC DIAGRAM OF 5,000 PSI BOP STACK

T10S, R22E, S.L.B.&M.

Found 1991 Aluminum
Cap with Pile of Stones.
Fence Post on SE side
of Cap.

S89°59'W - 40.01 (G.L.O.)
S89°57'13"W - 2640.76' (Meas.)

N89°39'W - 40.01 (G.L.O.)
N89°41'22"W - 2640.46' (Meas.)

Found 1991 Aluminum
Cap in Pile of Stones.
Fence Post on North
side of Cap.

Found 1991
Aluminum Cap in
Pile of Stones.

NBU 1022-1211BS (Surface Position)
NAD 83 LATITUDE = 39.962631° (39° 57' 45.470")
LONGITUDE = 109.382335° (109° 22' 56.406")
NAD 27 LATITUDE = 39.962665° (39° 57' 45.593")
LONGITUDE = 109.381655° (109° 22' 53.958")

NBU 1022-1211BS (Bottom Hole)
NAD 83 LATITUDE = 39.963226° (39° 57' 47.613")
LONGITUDE = 109.380612° (109° 22' 50.204")
NAD 27 LATITUDE = 39.963260° (39° 57' 47.736")
LONGITUDE = 109.379932° (109° 22' 47.756")

N0°01'W (G.L.O.)
N00°25'25"E - 5276.36' (Meas.)

Not
Monumented

12

**WELL LOCATION:
NBU 1022-1211BS**

ELEV. UNGRADED GROUND = 5224.0'

Bottom of Hole
Well Surface
Position

492'
974'

N00°03'41"E - 2640.93' (Meas.)
N0°07'E - 40.02 (G.L.O.)

Found 1991 Aluminum
Cap with Pile of
Stones. Fence Post
on North side of Cap.

N00°05'48"E (Basis of Bearings)
2634.07' (Measured)
N0°09'E - 39.91 (G.L.O.)

Found Uintah
County Aluminum
Cap on 3/4" rebar.
Pile of Stones

N89°52'55"W - 5312.93' (Meas.)
S89°59'W - 80.02 (G.L.O.)

Not
Monumented

Found 1991 Aluminum
Cap in Pile of Stones.
Fence Post on East
side of Cap.

NOTES:

▲ = Section Corners Located

- Well footages are measured at right angles to the Section Lines.
- G.L.O. distances are shown in feet or chains.
1 chain = 66 feet.
- The Bottom of hole bears N65°45'49"E 529.53' from the Surface Position.
- Bearings are based on Global Positioning Satellite observations.
- Basis of elevation is Tri-Sta "Two Water" located in the NW $\frac{1}{4}$ of Section 1, T10S, R21E, S.L.B.&M. The elevation of this Tri-Sta is shown on the Big Pack Mtn NE 7.5 Min. Quadrangle as being 5238'.

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD: NBU 1022-121

**NBU 1022-1211BS
WELL PLAT**

2568' FSL, 492' FEL (Bottom Hole)
**NE $\frac{1}{4}$ SE $\frac{1}{4}$ OF SECTION 12, T10S, R22E,
S.L.B.&M., UTAH COUNTY, UTAH.**



CONSULTING, LLC
2155 North Main Street
Sheridan WY 82801
Phone 307-674-0609
Fax 307-674-0182



SCALE

SURVEYOR'S CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

PROFESSIONAL LAND SURVEYOR
No. 6028691
JOHN R. HAUGH
STATE OF UTAH
2-8-11

TIMBERLINE

(435) 789-1365

ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078


DATE SURVEYED: 01-20-11	SURVEYED BY: R.Y.	SHEET NO:
DATE DRAWN: 02-03-11	DRAWN BY: M.W.W.	5
SCALE: 1" = 1000'	Date Last Revised:	5 OF 17

RECEIVED: September 13, 2011

WELL NAME	SURFACE POSITION					BOTTOM HOLE				
	NAD83		NAD27		FOOTAGES	NAD83		NAD27		FOOTAGES
	LATITUDE	LONGITUDE	LATITUDE	LONGITUDE		LATITUDE	LONGITUDE	LATITUDE	LONGITUDE	
NBU 1022-12J1CS	39°57'45.302"	109°22'56.871"	39°57'45.425"	109°22'54.423"	2333' FSL	39°57'42.742"	109°23'07.207"	39°57'42.865"	109°23'04.758"	2071' FSL
NBU 1022-12J1BS	39.962584°	109.382464°	39.962618°	109.381784°	1011' FEL	39.961873°	109.385335°	39.961907°	109.384655°	1815' FEL
NBU 1022-12J1BS	39°57'45.344"	109°22'56.755"	39°57'45.467"	109°22'54.307"	2337' FSL	39°57'46.012"	109°23'07.184"	39°57'46.135"	109°23'04.735"	2402' FSL
NBU 1022-12J1BS	39.962596°	109.382432°	39.962630°	109.381752°	1002' FEL	39.962781°	109.385329°	39.962815°	109.384649°	1814' FEL
NBU 1022-12I4BS	39°57'45.386"	109°22'56.639"	39°57'45.509"	109°22'54.190"	2341' FSL	39°57'41.063"	109°22'50.239"	39°57'41.186"	109°22'47.791"	1905' FSL
NBU 1022-12I4BS	39.962607°	109.382400°	39.962641°	109.381720°	993' FEL	39.961406°	109.380622°	39.961440°	109.379942°	493' FEL
NBU 1022-12I1CS	39°57'45.428"	109°22'56.523"	39°57'45.551"	109°22'54.074"	2345' FSL	39°57'44.343"	109°22'50.215"	39°57'44.466"	109°22'47.767"	2237' FSL
NBU 1022-12I1CS	39.962619°	109.382367°	39.962653°	109.381687°	984' FEL	39.962318°	109.380615°	39.962352°	109.379935°	492' FEL
NBU 1022-12I1BS	39°57'45.470"	109°22'56.406"	39°57'45.593"	109°22'53.958"	2350' FSL	39°57'47.613"	109°22'50.204"	39°57'47.736"	109°22'47.756"	2568' FSL
NBU 1022-12I1BS	39.962631°	109.382335°	39.962665°	109.381655°	974' FEL	39.963226°	109.380612°	39.963260°	109.379932°	492' FEL
NBU 1022-12I	39°57'44.966"	109°22'57.301"	39°57'45.089"	109°22'54.852"	2298' FSL					
NBU 1022-12I	39.962491°	109.382584°	39.962525°	109.381903°	1044' FEL					

RELATIVE COORDINATES - From Surface Position to Bottom Hole

WELL NAME	NORTH	EAST	WELL NAME	NORTH	EAST	WELL NAME	NORTH	EAST	WELL NAME	NORTH	EAST
NBU 1022-12J1CS	-259.8'	-804.8'	NBU 1022-12J1BS	66.9'	-812.3'	NBU 1022-12I4BS	-437.1'	498.8'	NBU 1022-12I1CS	-109.4'	491.3'
NBU 1022-12I1BS	217.4'	482.9'									

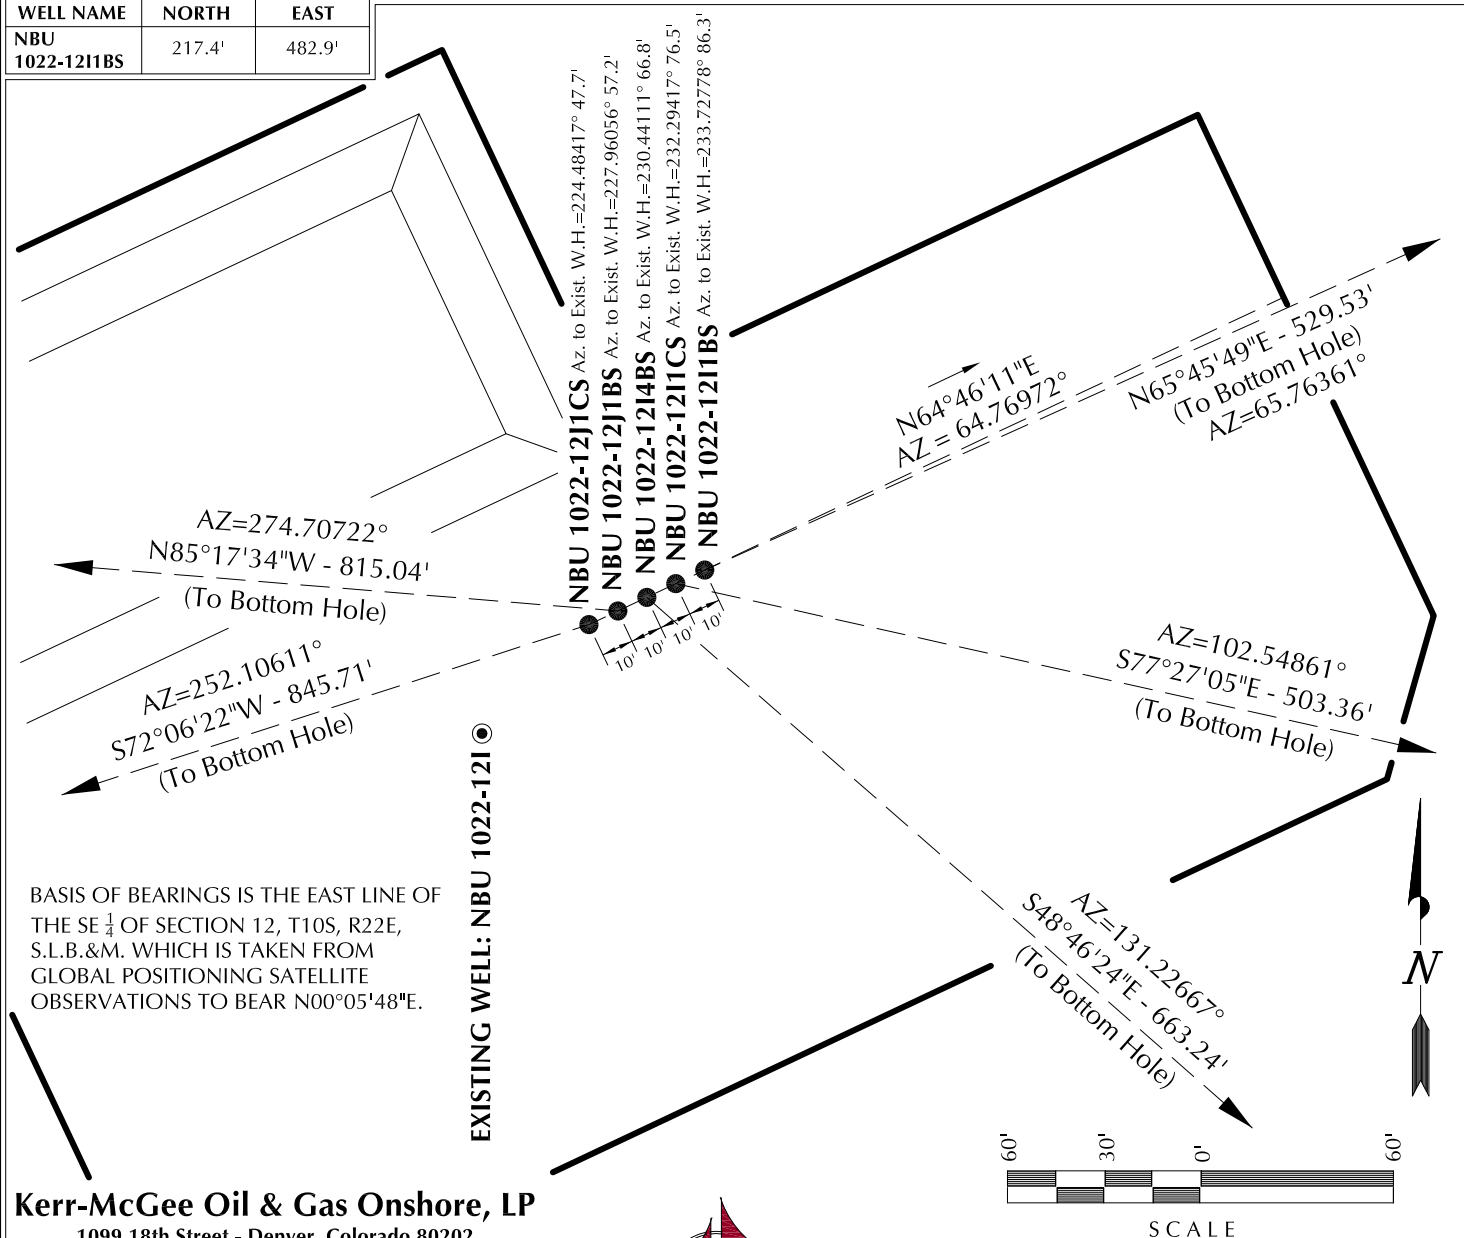

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD - NBU 1022-12I

WELL PAD INTERFERENCE PLAT
WELLS - NBU 1022-12J1CS,
NBU 1022-12J1BS, NBU 1022-12I4BS,
NBU 1022-12I1CS & NBU 1022-12I1BS
LOCATED IN SECTION 12, T10S, R22E,
S.L.B.&M., UTAH COUNTY, UTAH.



CONSULTING, LLC
2155 North Main Street
Sheridan WY 82801
Phone 307-674-0609
Fax 307-674-0182


TIMBERLINE

(435) 789-1365

ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078

DATE SURVEYED: 01-20-11	SURVEYED BY: R.Y.	SHEET NO: 6 6 OF 17
DATE DRAWN: 02-03-11	DRAWN BY: M.W.W.	
SCALE: 1" = 60'	Date Last Revised:	

RECEIVED: September 13, 2011

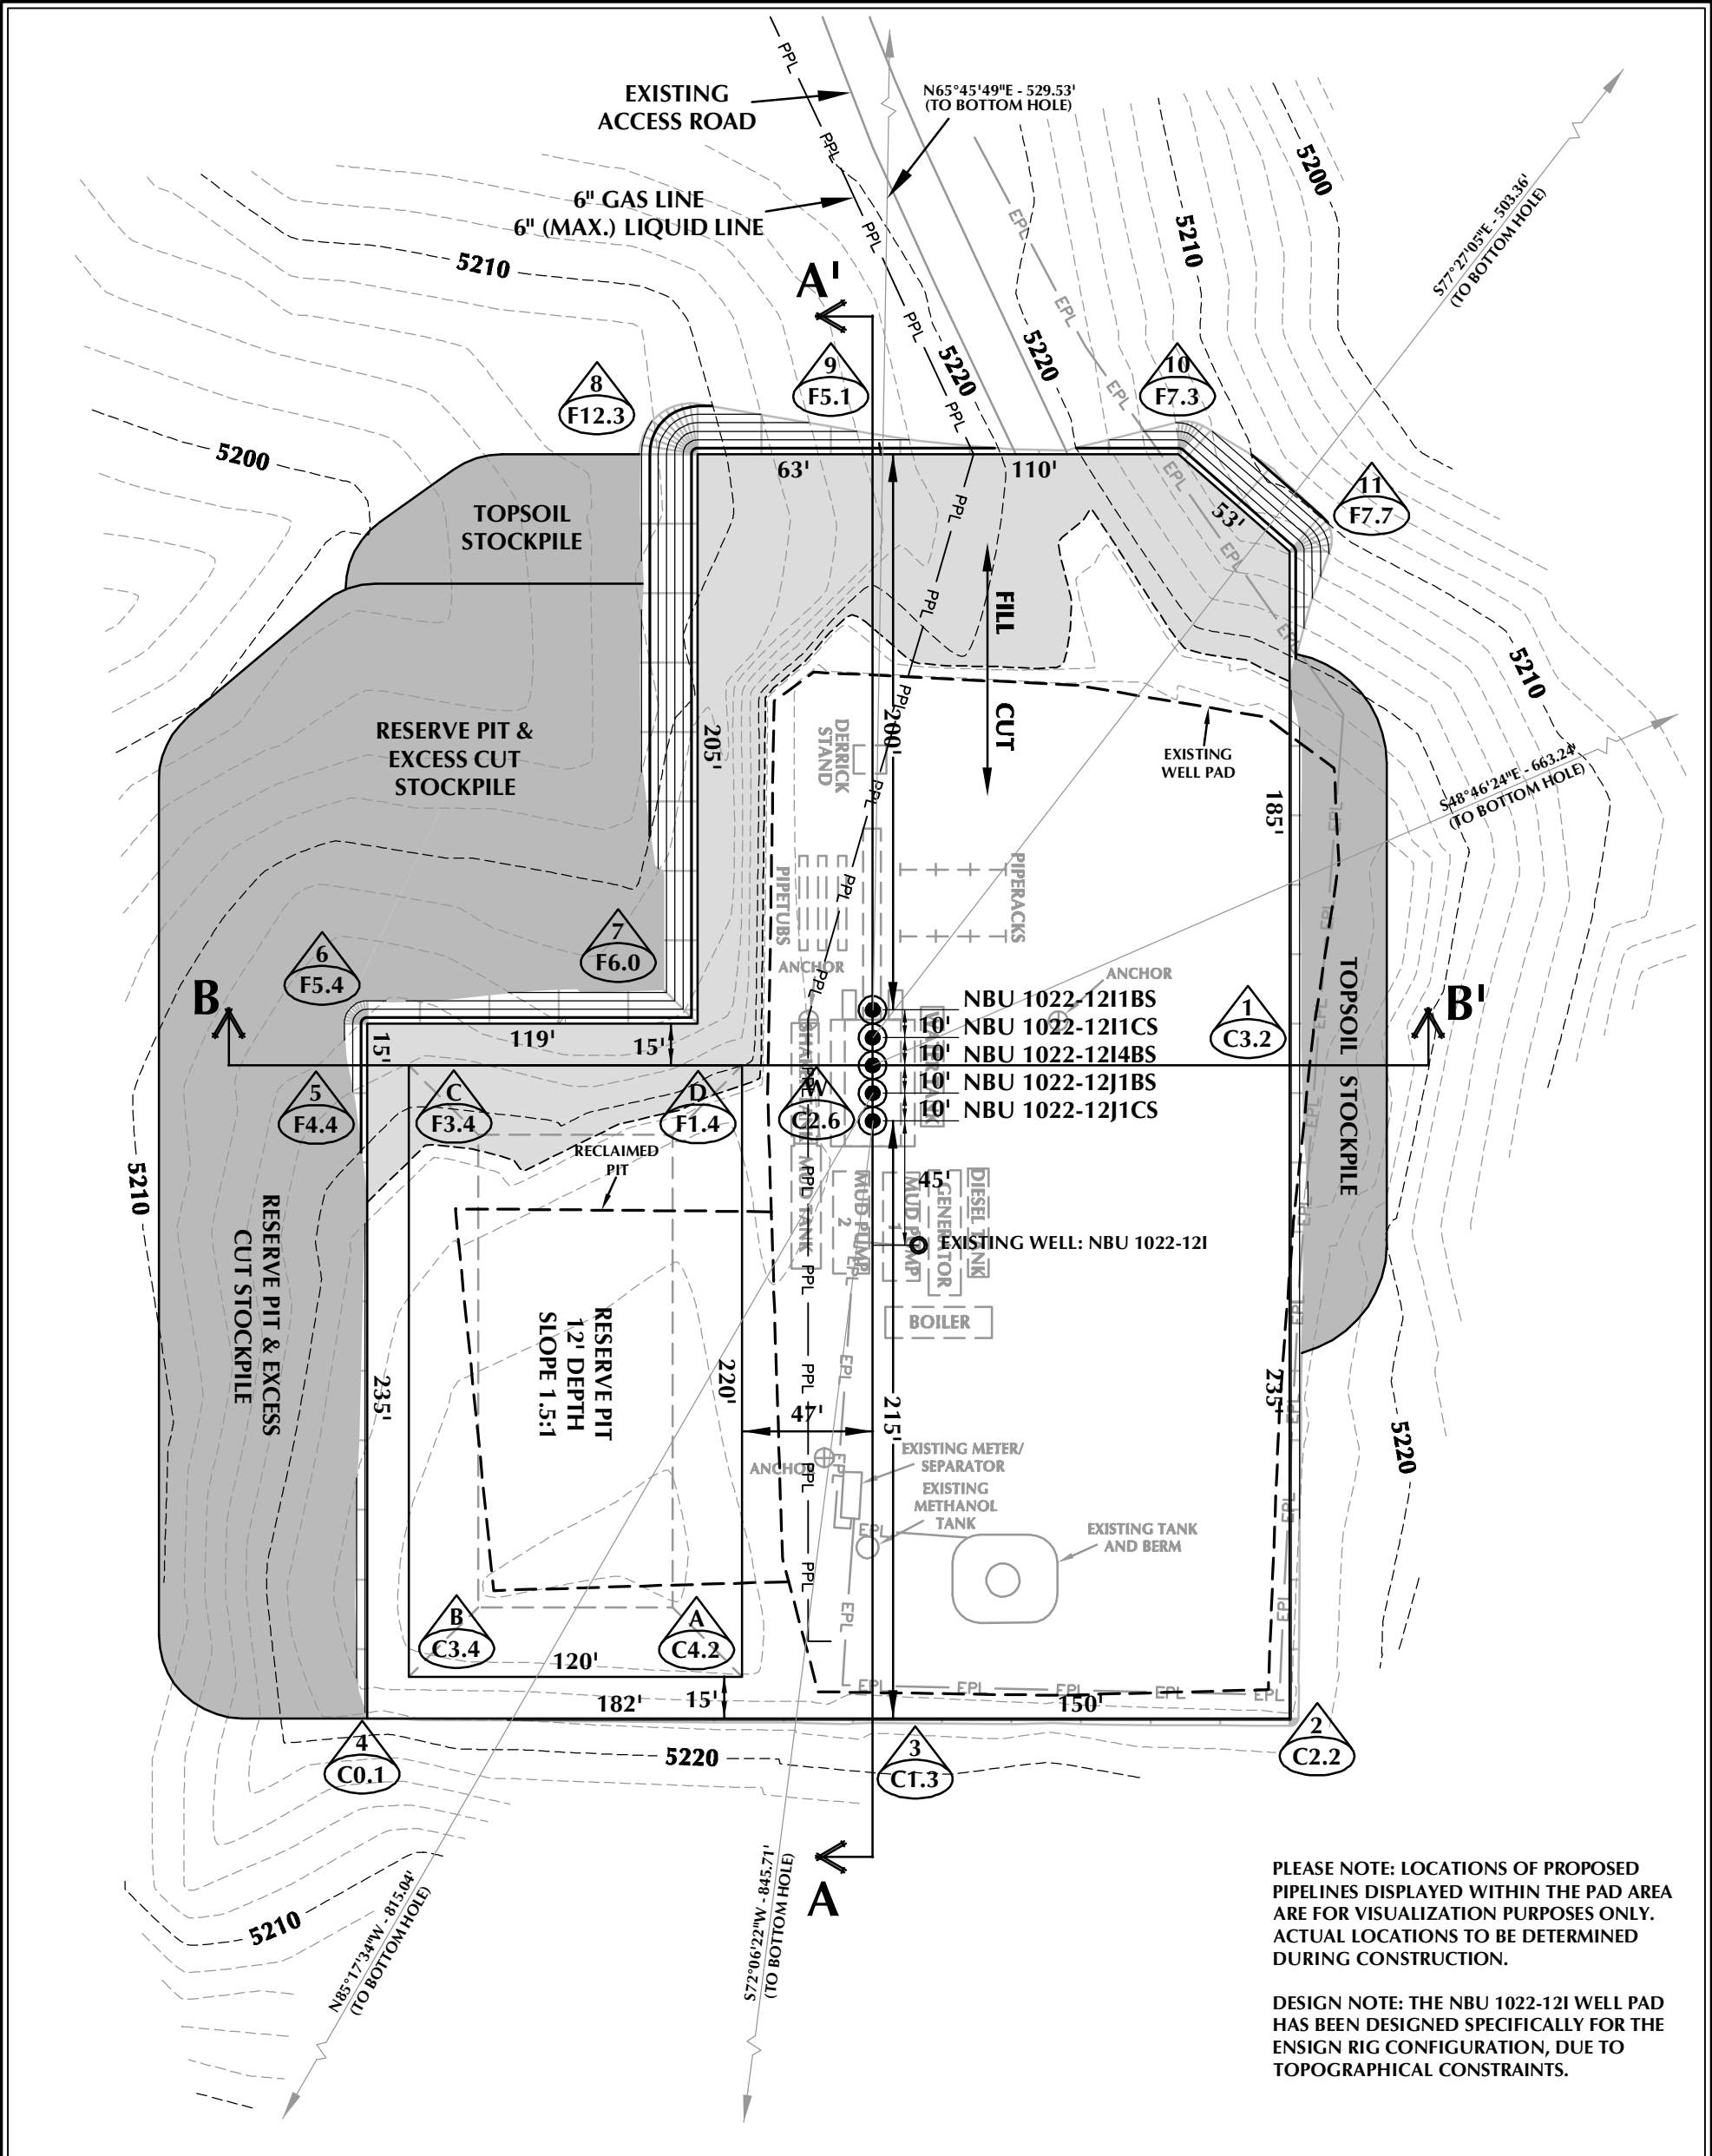

WELL PAD - NBU 1022-121 DESIGN SUMMARY

EXISTING GRADE @ CENTER OF WELL PAD = 5224.1'
FINISHED GRADE ELEVATION = 5221.5'
CUT SLOPES = 1.5:1
FILL SLOPES = 1.5:1
TOTAL WELL PAD AREA = 3.14 ACRES
TOTAL DAMAGE AREA = 6.00 ACRES
SHRINKAGE FACTOR = 1.10
SWELL FACTOR = 1.00

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD - NBU 1022-121

WELL PAD - LOCATION LAYOUT
NBU 1022-121CS,
NBU 1022-121BS, NBU 1022-1214BS,
NBU 1022-1211CS & NBU 1022-1211BS
LOCATED IN SECTION 12, T10S, R22E,
S.L.B.&M., UTAH COUNTY, UTAH



CONSULTING, LLC
2155 North Main Street
Sheridan, WY 82801
Phone 307-674-0609
Fax 307-674-0182

WELL PAD QUANTITIES

TOTAL CUT FOR WELL PAD = 12,122 C.Y.
TOTAL FILL FOR WELL PAD = 5,858 C.Y.
TOPSOIL @ 6" DEPTH = 1,299 C.Y.
EXCESS MATERIAL = 6,264 C.Y.

RESERVE PIT QUANTITIES

TOTAL CUT FOR RESERVE PIT
+/- 9,210 C.Y.
RESERVE PIT CAPACITY (2' OF FREEBOARD)
+/- 35,230 BARRELS

WELL PAD LEGEND


- EXISTING WELL LOCATION
- PROPOSED WELL LOCATION
- PROPOSED BOTTOM HOLE LOCATION
- EXISTING CONTOURS (2' INTERVAL)
- PROPOSED CONTOURS (2' INTERVAL)
- PPL - PROPOSED PIPELINE
- EPL - EXISTING PIPELINE




HORIZONTAL 0 30' 60' 1" = 60'
2' CONTOURS

SCALE: 1"=60' DATE: 3/8/11 SHEET NO: 7
REVISED: TAR 4/22/11 7 OF 17

TIMBERLINE ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078
(435) 789-1365

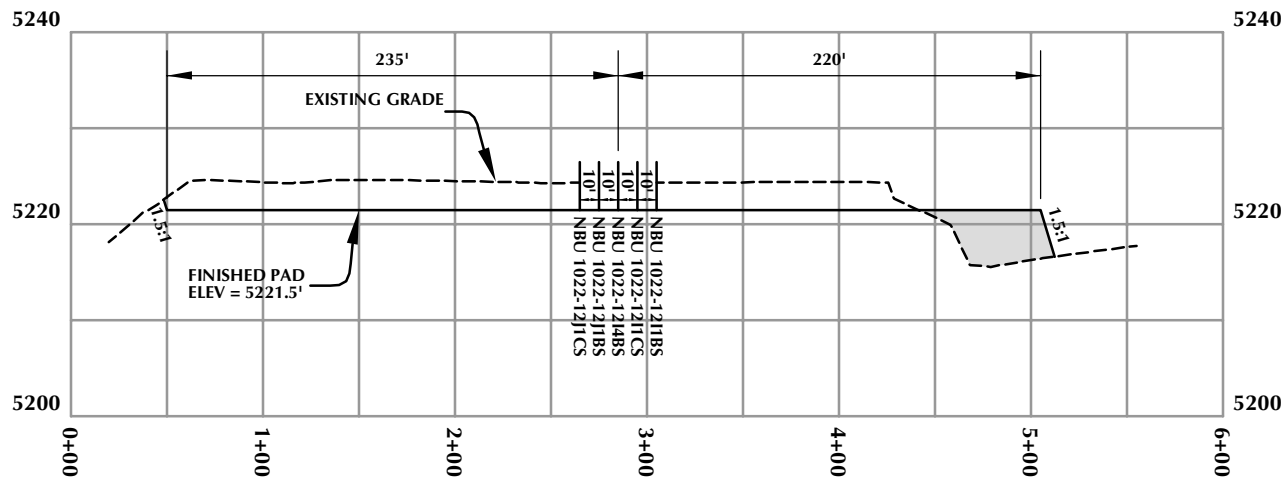

CROSS SECTION A-A'

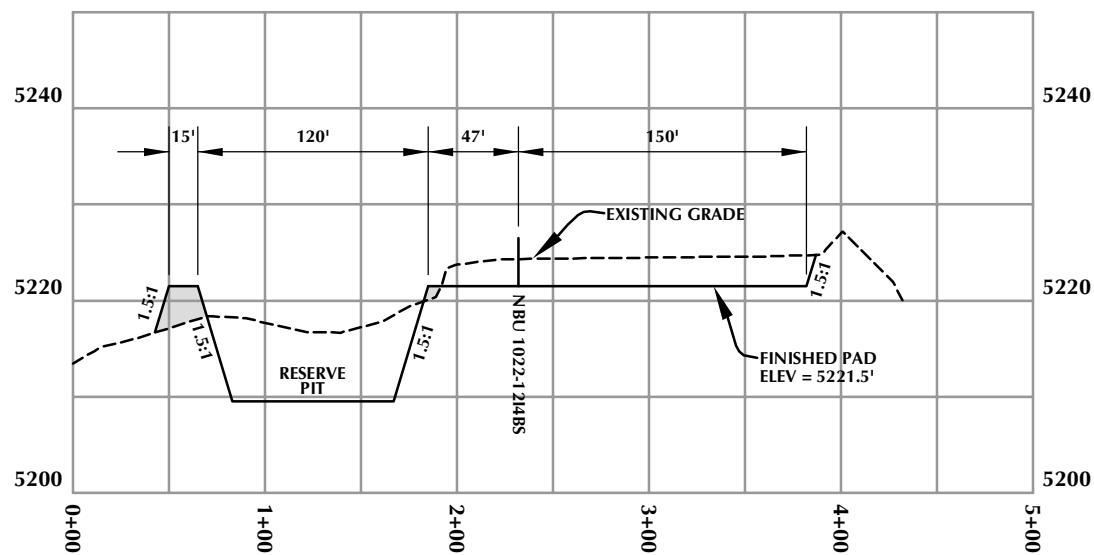

CROSS SECTION B-B'

NOTE: CROSS SECTION B-B' DEPICTS MAXIMUM RESERVE PIT DEPTH.

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD - NBU 1022-121

WELL PAD - CROSS SECTIONS

NBU 1022-121CS,
NBU 1022-121BS, NBU 1022-121BS,
NBU 1022-121CS & NBU 1022-121BS
LOCATED IN SECTION 12, T10S, R22E,
S.L.B.&M., UTAH COUNTY, UTAH



CONSULTING, LLC
2155 North Main Street
Sheridan, WY 82801
Phone 307-674-0609
Fax 307-674-0182


TIMBERLINE
ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078

(435) 789-1365

HORIZONTAL 0 50' 100' 1" = 100'
VERTICAL 0 10' 20' 1" = 20'

Scale: 1"=100' Date: 3/8/11 SHEET NO:
REVISED: 8 8 OF 17

RECEIVED: September 13, 2011

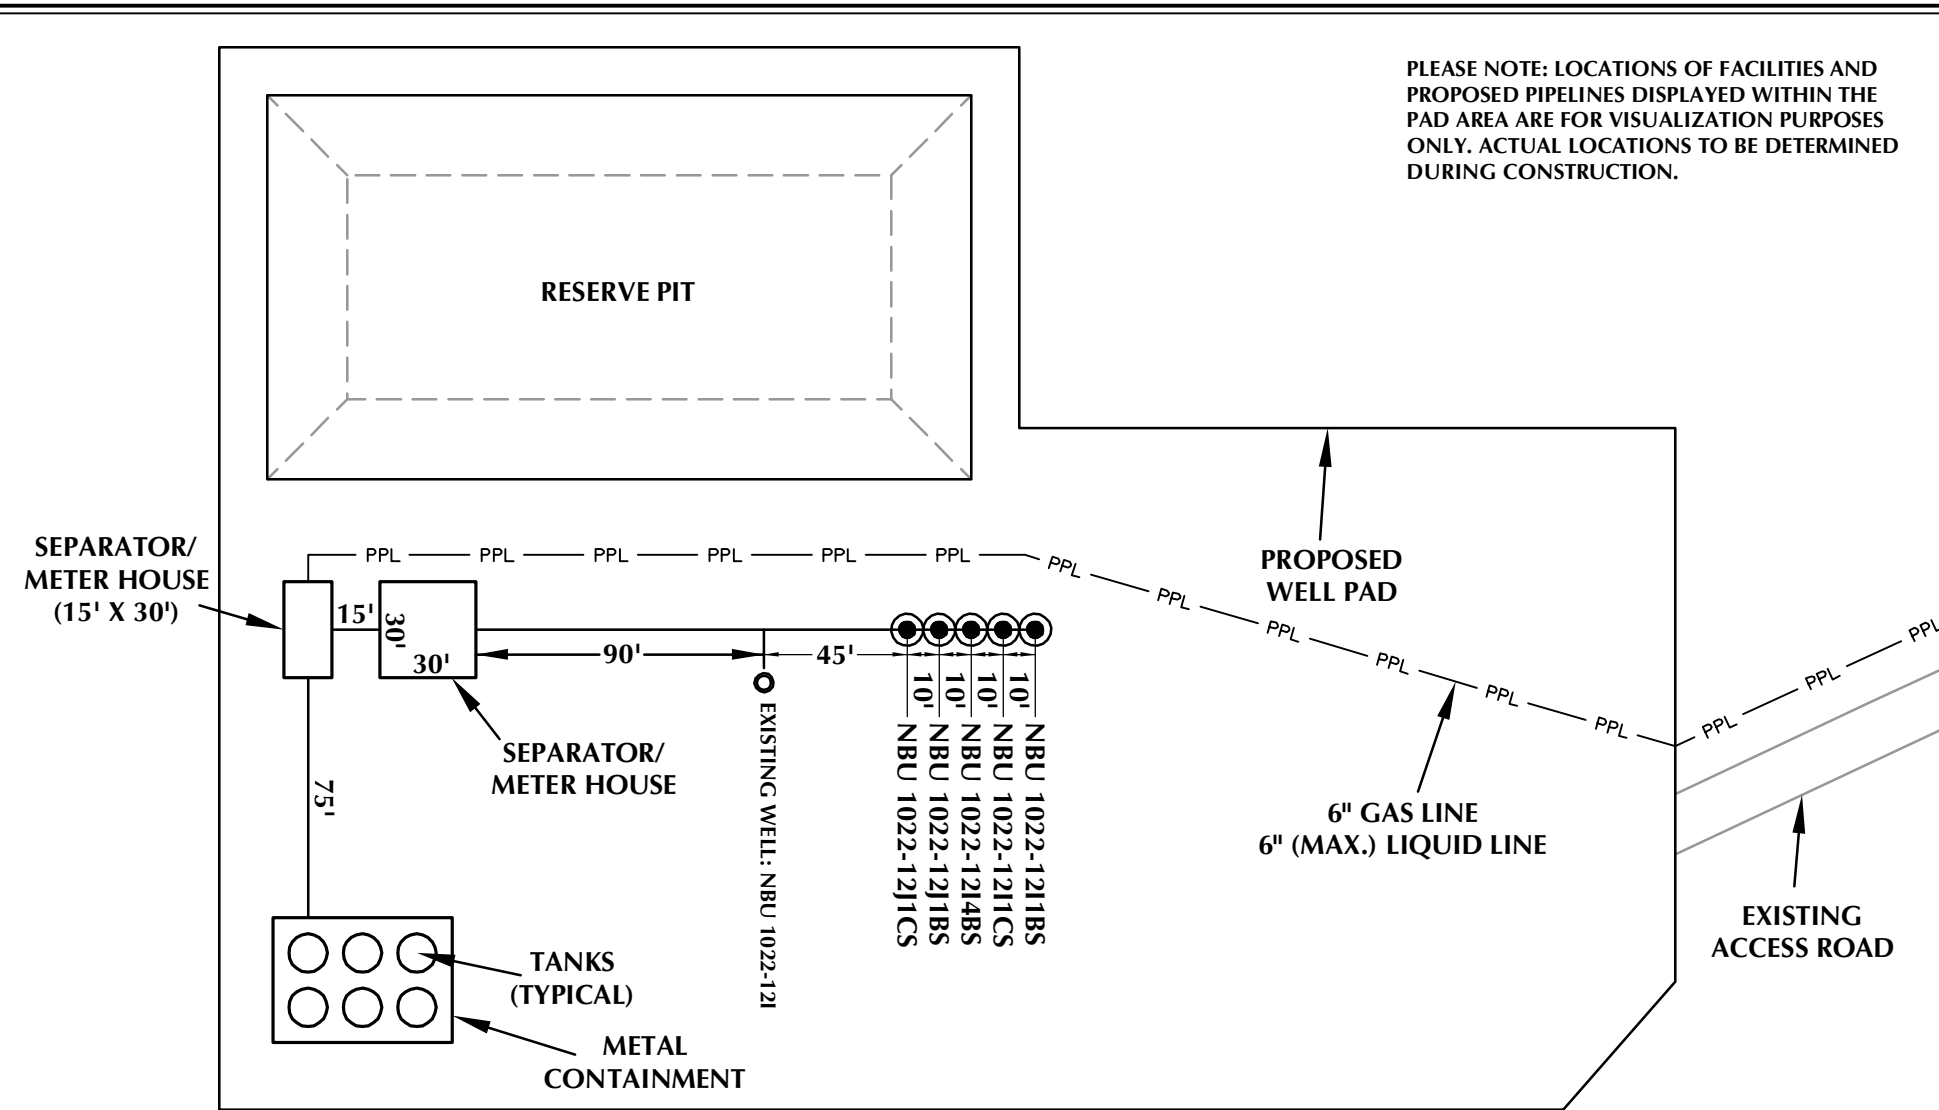

Kerr-McGee Oil & Gas Onshore, LP
 1099 18th Street - Denver, Colorado 80202

WELL PAD - NBU 1022-121

WELL PAD - FACILITIES DIAGRAM

**NBU 1022-12J1CS,
 NBU 1022-12J1BS, NBU 1022-12I4BS,
 NBU 1022-12I1CS & NBU 1022-12I1BS
 LOCATED IN SECTION 12, T10S, R22E,
 S.L.B.&M., UTAH COUNTY, UTAH**



CONSULTING, LLC
 2155 North Main Street
 Sheridan, WY 82801
 Phone 307-674-0609
 Fax 307-674-0182

WELL PAD LEGEND

- EXISTING WELL LOCATION
- PROPOSED WELL LOCATION
- PPL — PROPOSED PIPELINE
- EPL — EXISTING PIPELINE



HORIZONTAL 0 30' 60' 1" = 60'

TIMBERLINE
 ENGINEERING & LAND SURVEYING, INC.
 209 NORTH 300 WEST • VERNAL, UTAH 84078

(435) 789-1365

Scale: 1"=60'

Date: 3/8/11

SHEET NO:

9

9 OF 17

RECEIVED: September 13, 2011

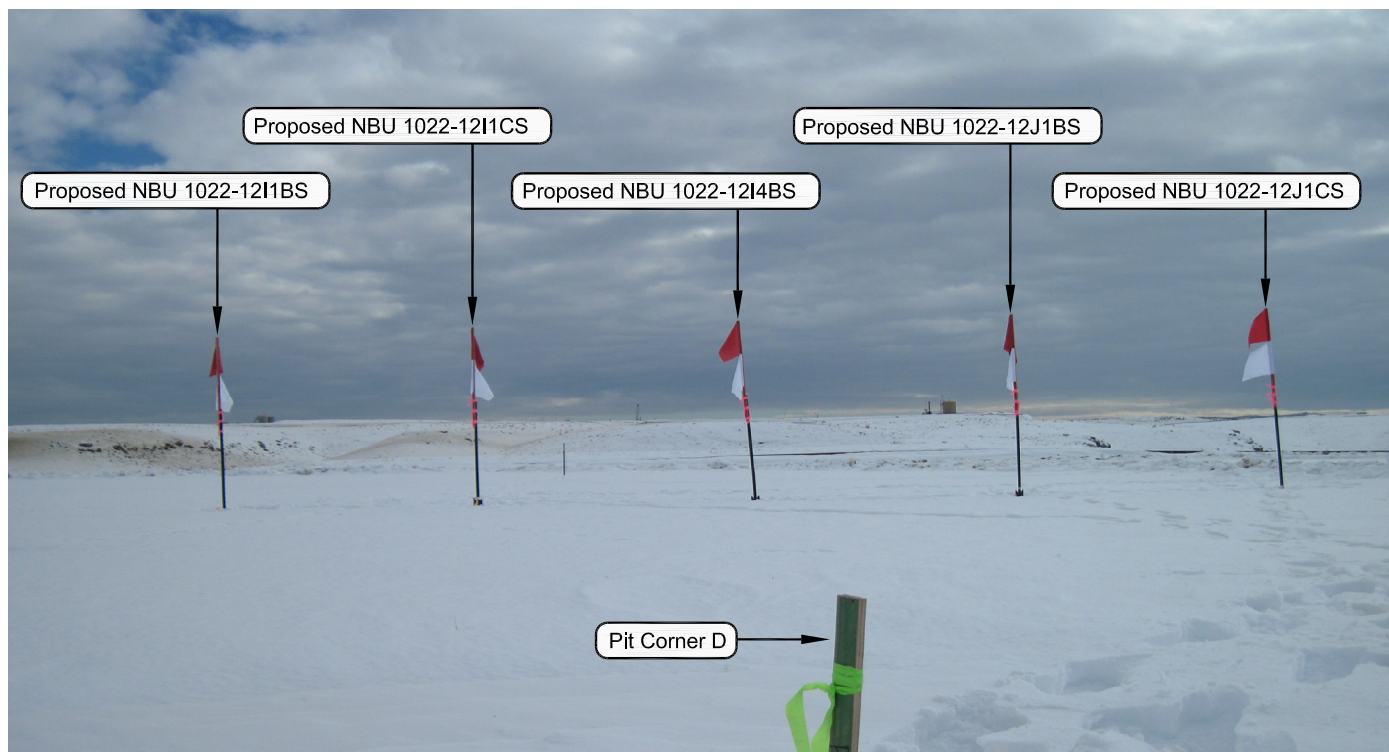


PHOTO VIEW: FROM PIT CORNER D TO LOCATION STAKE

CAMERA ANGLE: SOUTHEASTERLY



PHOTO VIEW: FROM EXISTING ACCESS ROAD

CAMERA ANGLE: SOUTHWESTERLY

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD - NBU 1022-12I

LOCATION PHOTOS
NBU 1022-12J1CS,
NBU 1022-12J1BS, NBU 1022-12I4BS,
NBU 1022-12I1CS & NBU 1022-12I1BS
LOCATED IN SECTION 12, T10S, R22E,
S.L.B.&M., Uintah County, Utah.



CONSULTING, LLC
2155 North Main Street
Sheridan WY 82801
Phone 307-674-0609
Fax 307-674-0182


TIMBERLINE

(435) 789-1365

ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078

DATE PHOTOS TAKEN: 01-20-11	PHOTOS TAKEN BY: R.Y.	10 10 OF 17
DATE DRAWN: 02-03-11	DRAWN BY: M.W.W.	
Date Last Revised:		

RECEIVED: September 13, 2011

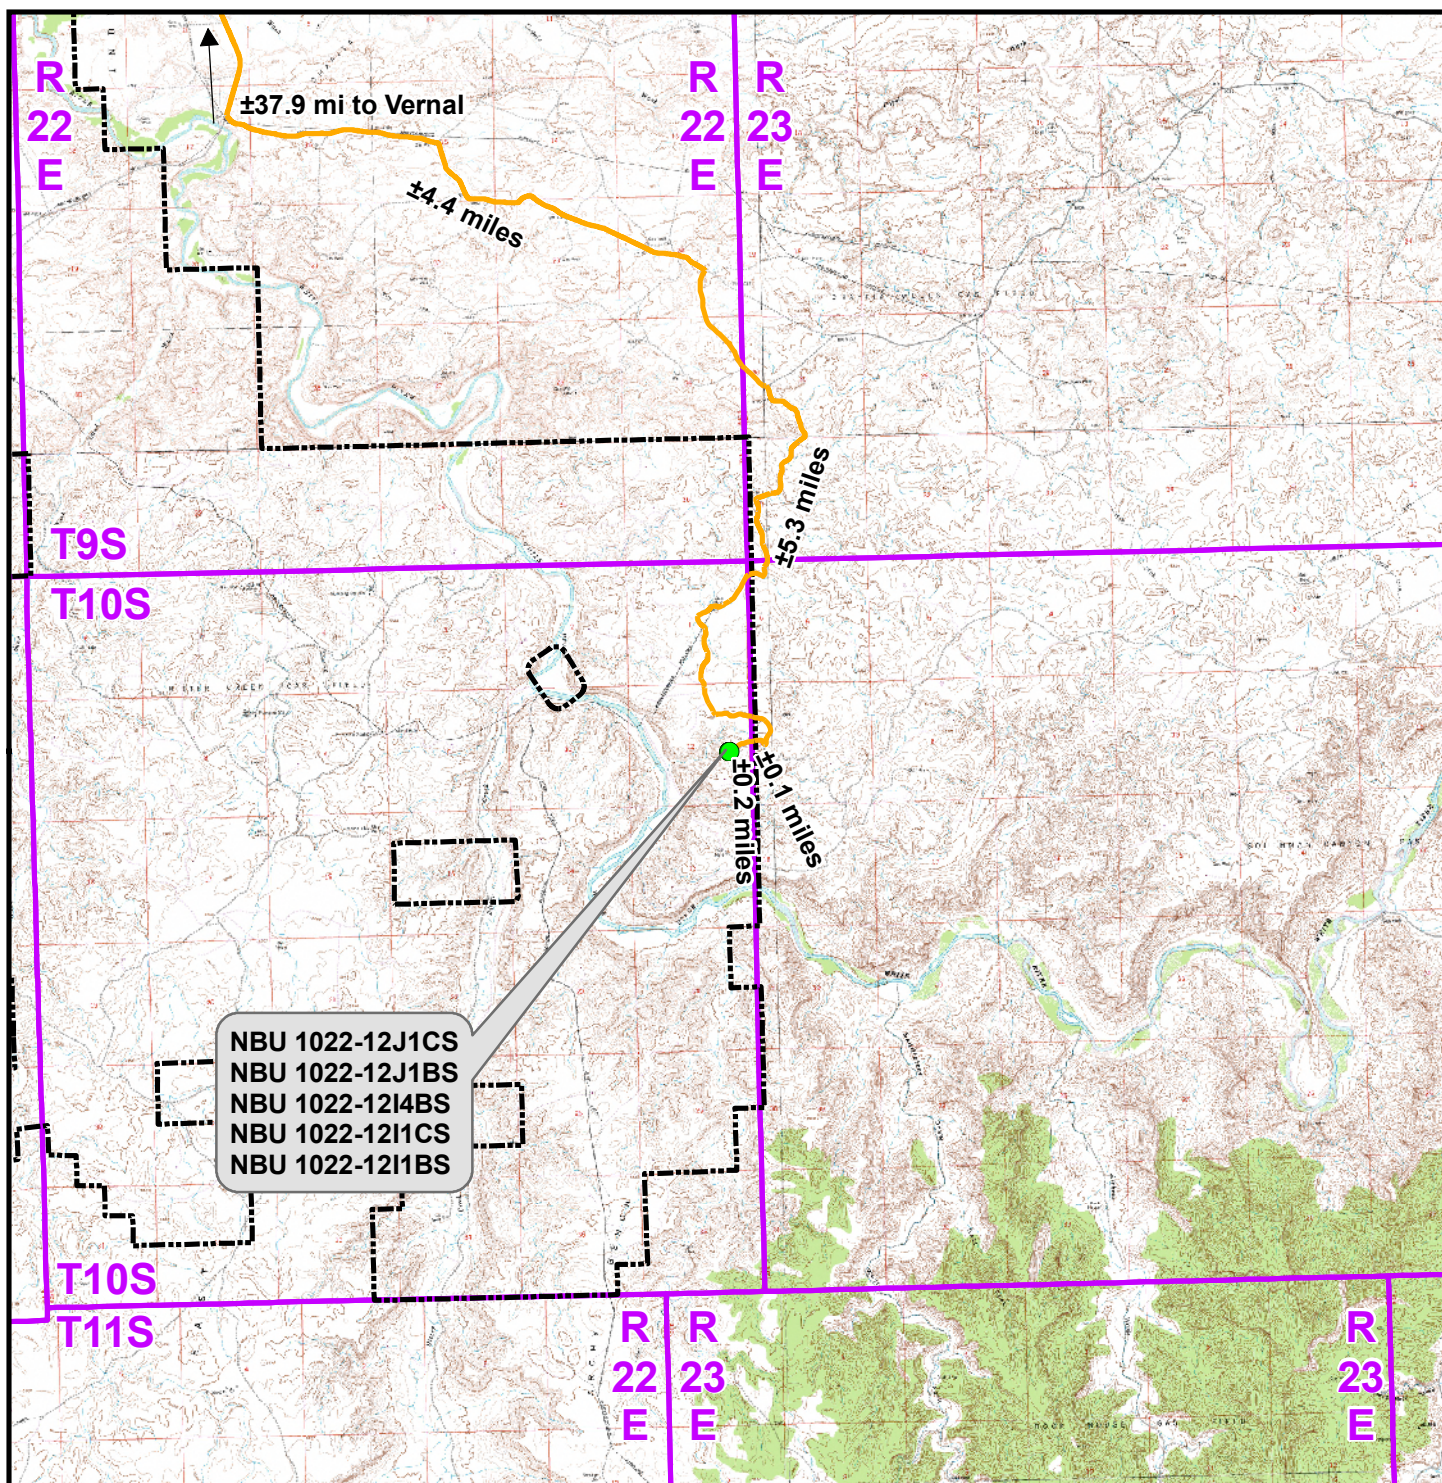

Legend

- Proposed Well Location
- Natural Buttes Unit Boundary
- Access Route - Proposed

Distance From Well Pad - NBU 1022-12I To Unit Boundary: ±974ft

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street, Denver, Colorado 80202

WELL PAD - NBU 1022-12I

TOPO A
NBU 1022-12J1CS,
NBU 1022-12J1BS, NBU 1022-12I4BS,
NBU 1022-12I1CS & NBU 1022-12I1BS
LOCATED IN SECTION 12, T10S, R22E,
S.L.B.&M., UTAH COUNTY, UTAH



609 CONSULTING, LLC
2155 North Main Street
Sheridan, WY 82801
Phone (307) 674-0609
Fax (307) 674-0182



Scale: 1:100,000

NAD83 USP Central

Sheet No:


Drawn: TL
Revised:

Date: 8 Mar 2011
Date:

11

11 of 17

RECEIVED: September 13, 2011

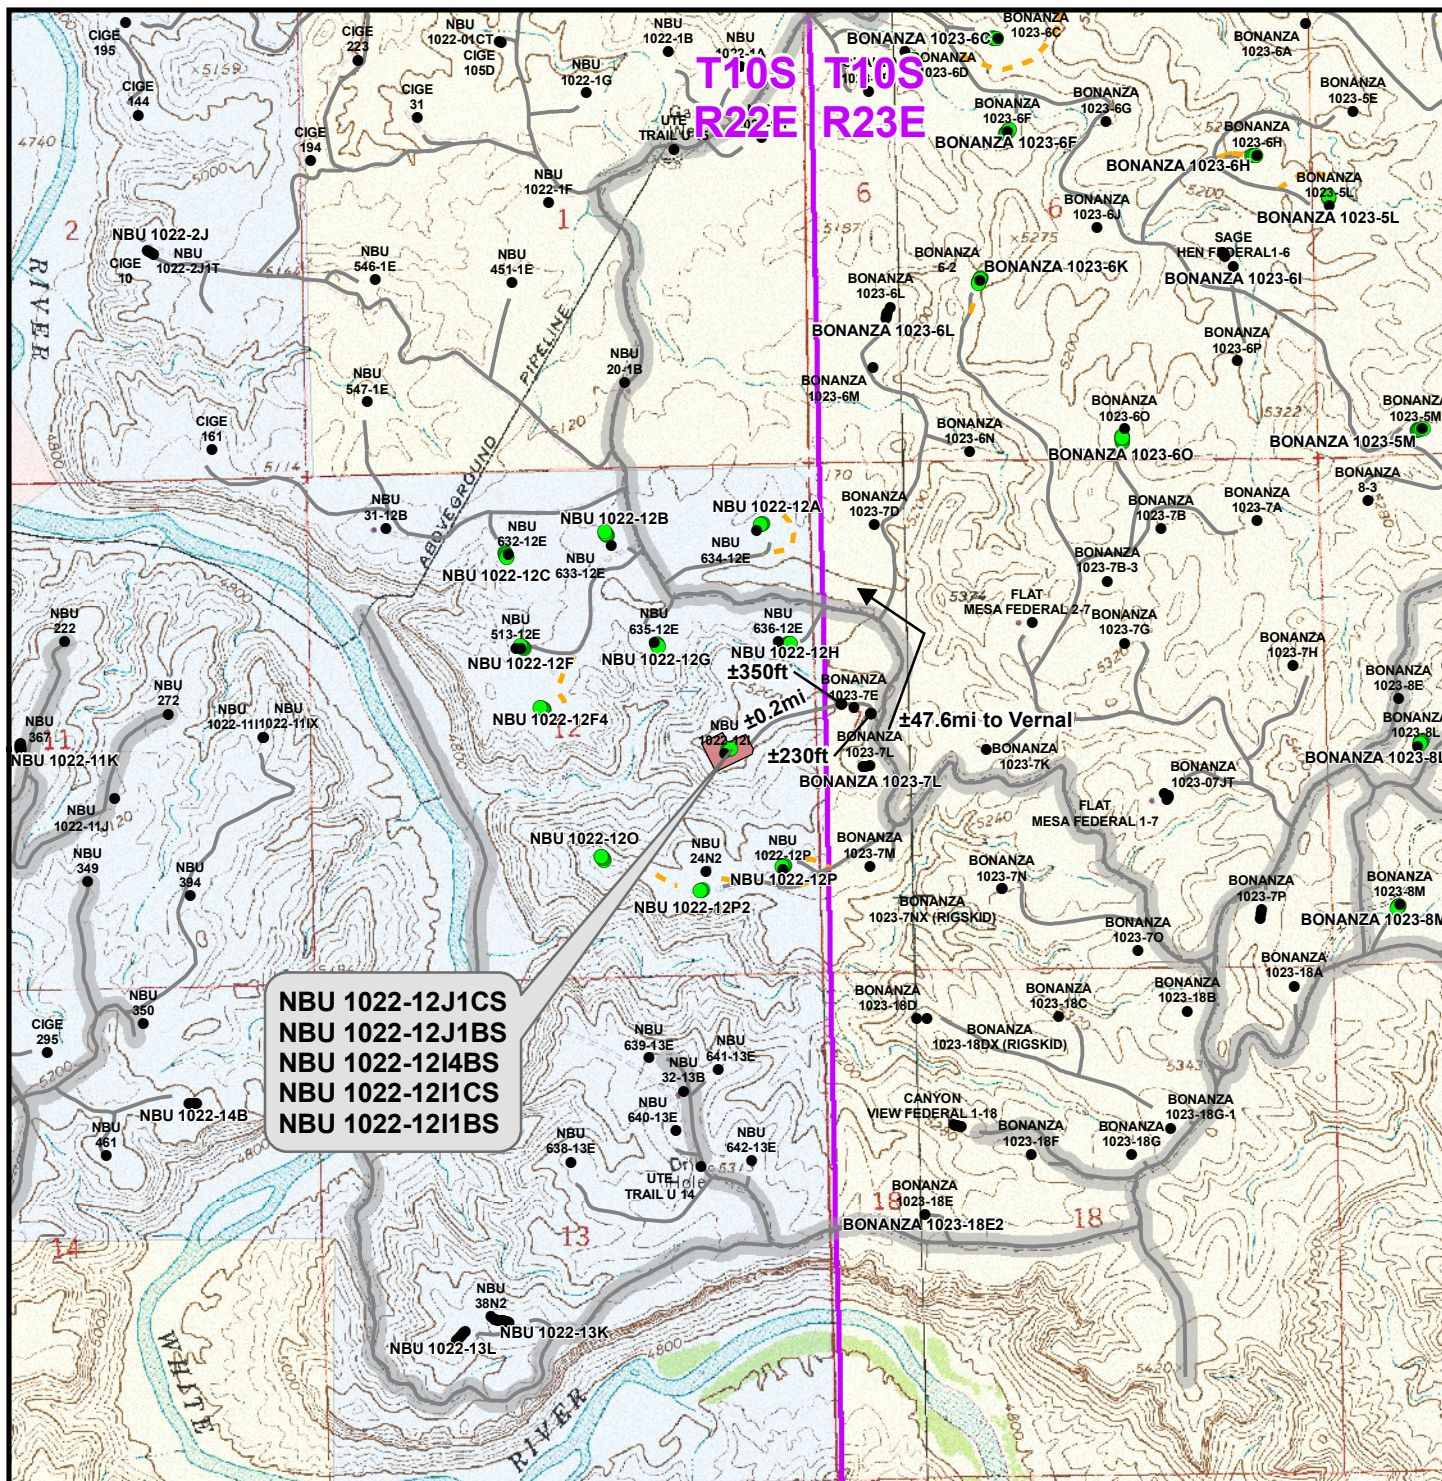

Legend

- Well - Proposed
- Well - Existing
- Well Pad
- Road - Proposed
- Road - Existing
- County Road
- Bureau of Land Management
- Indian Reservation
- State
- Private

Total Proposed Road Length: ±0ft

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street, Denver, Colorado 80202


WELL PAD - NBU 1022-12I


TOPO B
NBU 1022-12J1CS,
NBU 1022-12J1BS, NBU 1022-12I4BS,
NBU 1022-12I1CS & NBU 1022-12I1BS
LOCATED IN SECTION 12, T10S, R22E,
S.L.B.&M., UTAH COUNTY, UTAH



Scale: 1" = 2,000ft | NAD83 USP Central | Sheet No:
Drawn: TL | Date: 8 Mar 2011 | **12**
Revised: | Date: | 12 of 17

RECEIVED: September 13, 2011

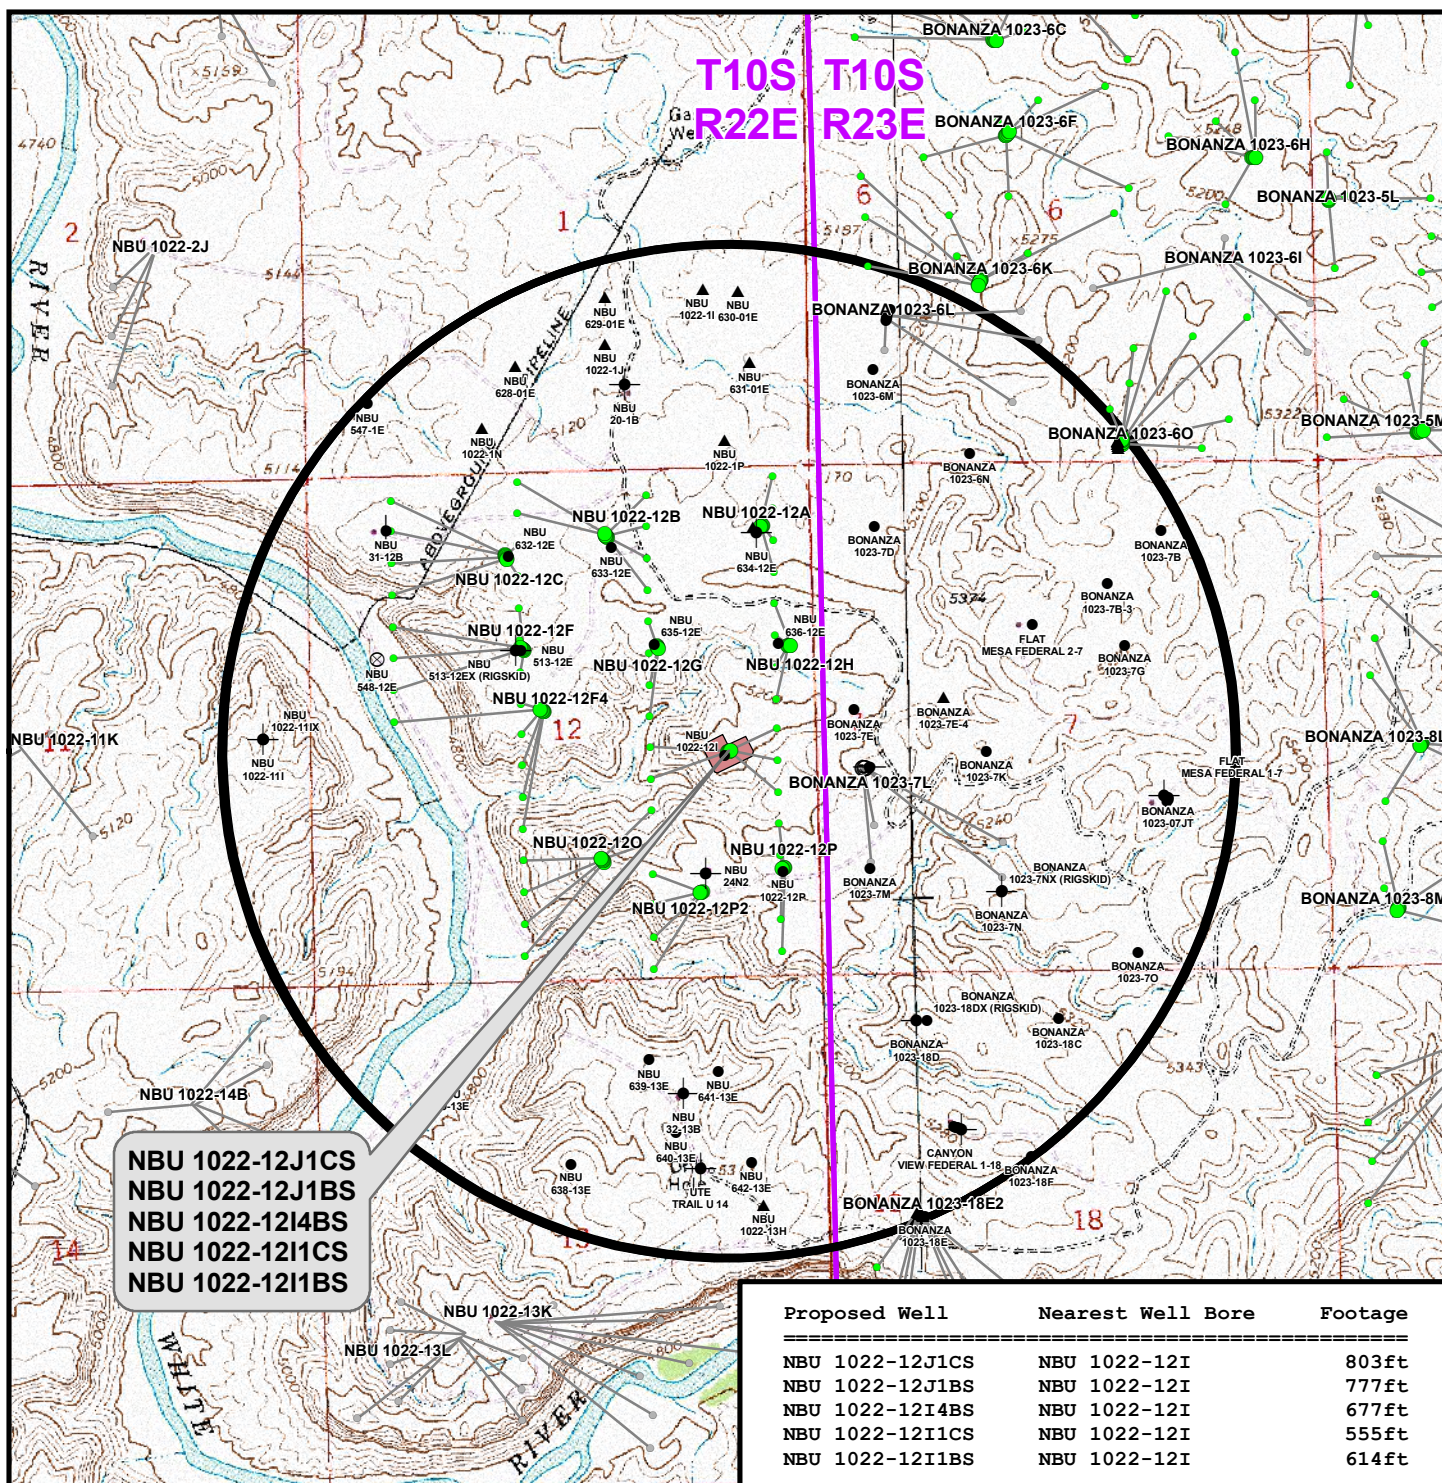

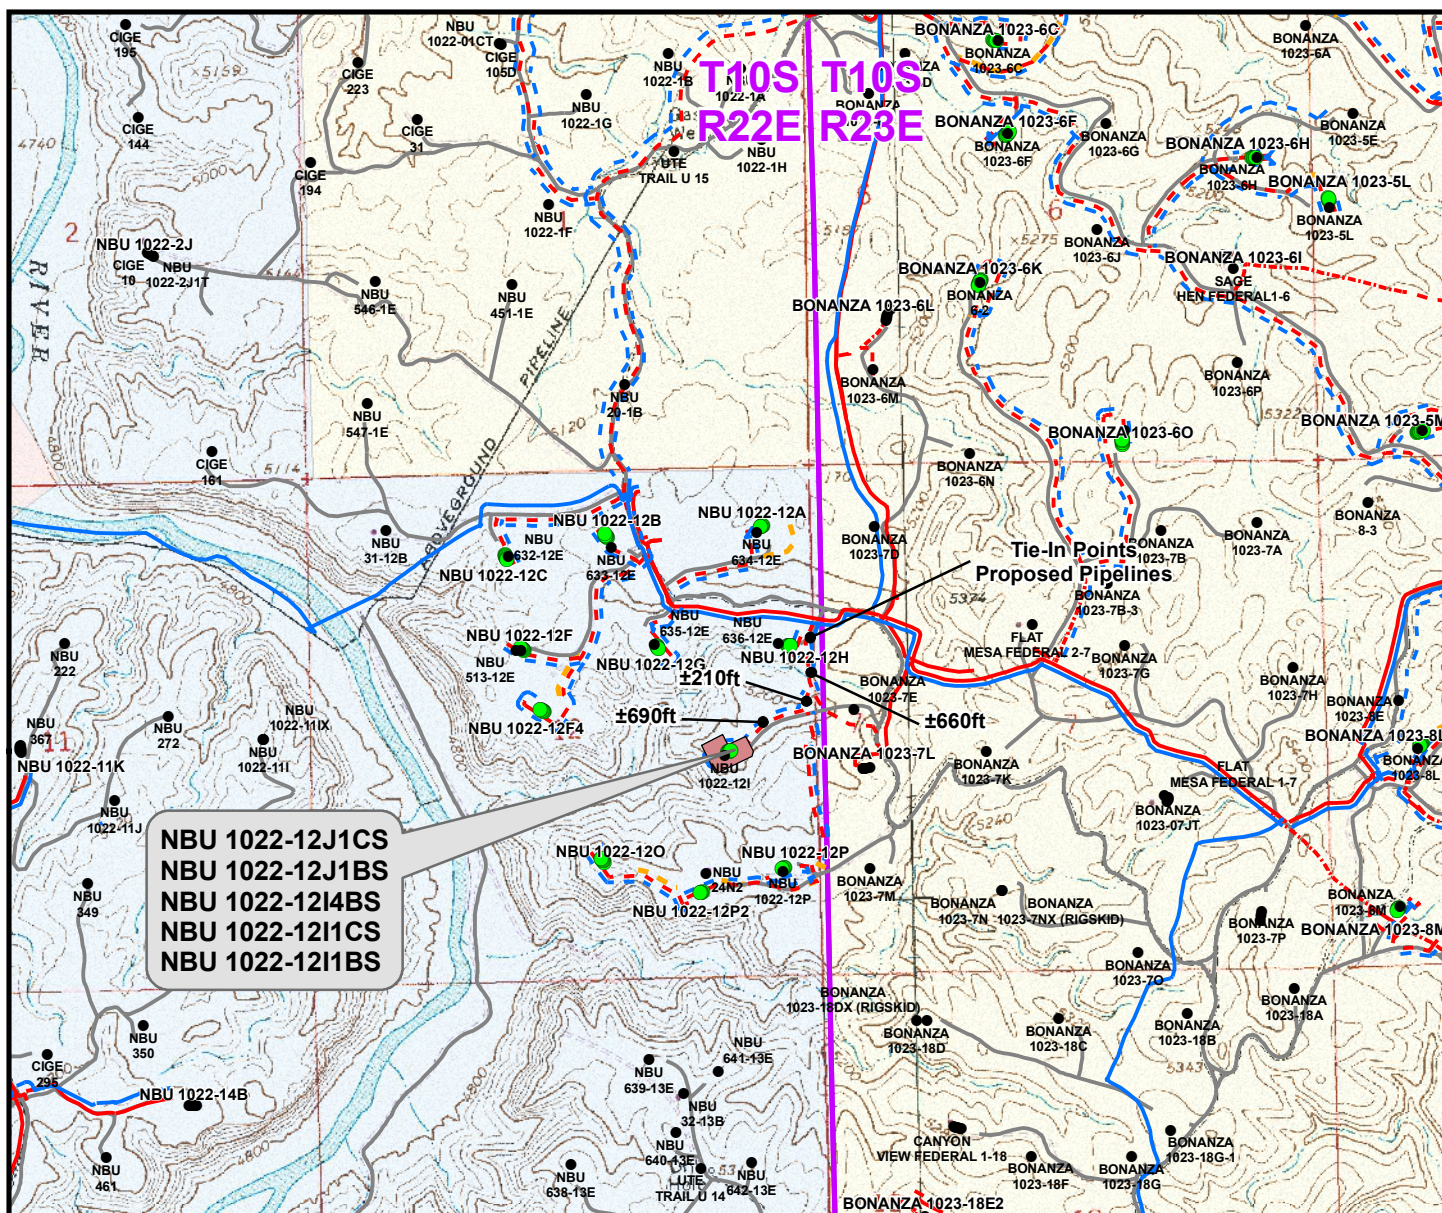

Proposed Liquid Pipeline	Length
Proposed 6" (Max.) (Meter House to Edge of Pad)	±460ft
Proposed 6" (Max.) (Edge of Pad to 12P Intersection)	±690ft
Proposed 6" (Max.) (12P Intersection to 7L Intersection)	±210ft
Proposed 6" (Max.) (7L Intersection to 12H Intersection)	±660ft
TOTAL PROPOSED LIQUID PIPELINE =	±2,020ft

Proposed Gas Pipeline	Length
Proposed 6" (Meter House to Edge of Pad)	±460ft
Proposed 6" (Edge of Pad to 12P Intersection)	±690ft
Proposed 12" (12P Intersection to 7L Intersection)	±210ft
Proposed 12" (7L Intersection to 12H Intersection)	±660ft
TOTAL PROPOSED GAS PIPELINE =	±2,020ft

Legend

- Well - Proposed
- Well - Existing
- Well Pad
- - - Gas Pipeline - Proposed
- - - Gas Pipeline - To Be Upgraded
- Gas Pipeline - Existing
- - - Liquid Pipeline - Proposed
- Liquid Pipeline - Existing
- Road - Proposed
- Road - Existing
- Bureau of Land Management
- Indian Reservation
- State
- Private

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street, Denver, Colorado 80202

WELL PAD - NBU 1022-12I


TOPO D
NBU 1022-12J1CS,
NBU 1022-12J1BS, NBU 1022-12I4BS,
NBU 1022-12I1CS & NBU 1022-12I1BS
LOCATED IN SECTION 12, T10S, R22E,
S.L.B.&M., UTAH COUNTY, UTAH

609
CONSULTING, LLC
2155 North Main Street
Sheridan, WY 82801
Phone (307) 674-0609
Fax (307) 674-0182



Scale: 1" = 2,000ft | NAD83 USP Central | Sheet No:
Drawn: TL | Date: 8 Mar 2011 | **14**
Revised: | Date: | 14 of 17

RECEIVED: September 13, 2011

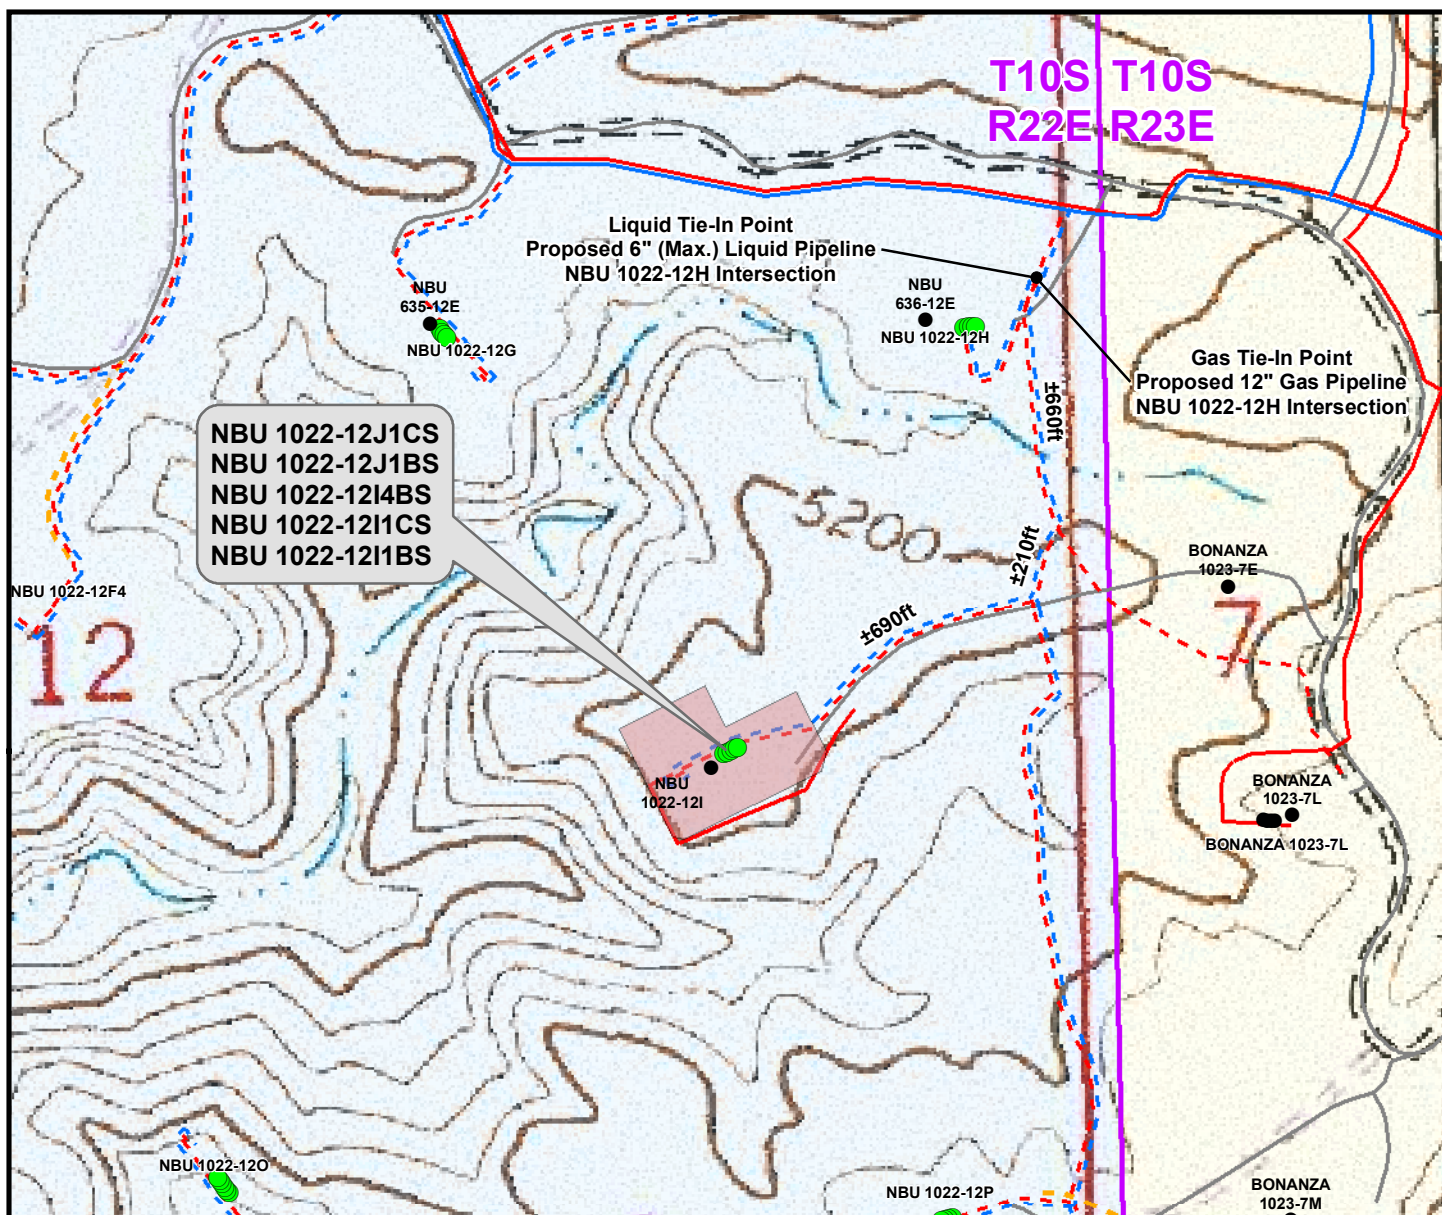

Proposed Liquid Pipeline	Length
Proposed 6" (Max.) (Meter House to Edge of Pad)	±460ft
Proposed 6" (Max.) (Edge of Pad to 12P Intersection)	±690ft
Proposed 6" (Max.) (12P Intersection to 7L Intersection)	±210ft
Proposed 6" (Max.) (7L Intersection to 12H Intersection)	±660ft
TOTAL PROPOSED LIQUID PIPELINE =	±2,020ft

Proposed Gas Pipeline	Length
Proposed 6" (Meter House to Edge of Pad)	±460ft
Proposed 6" (Edge of Pad to 12P Intersection)	±690ft
Proposed 12" (12P Intersection to 7L Intersection)	±210ft
Proposed 12" (7L Intersection to 12H Intersection)	±660ft
TOTAL PROPOSED GAS PIPELINE =	±2,020ft

Legend

- Well - Proposed
 Well Pad
 --- Gas Pipeline - Proposed
 --- Liquid Pipeline - Proposed
 --- Road - Proposed
 Bureau of Land Management
- Well - Existing
 --- Gas Pipeline - To Be Upgraded
 --- Liquid Pipeline - Existing
 --- Road - Existing
 Indian Reservation
- Gas Pipeline - Existing
 State
 Private

Kerr-McGee Oil & Gas Onshore, LP
 1099 18th Street, Denver, Colorado 80202

WELL PAD - NBU 1022-12I

TOPO D2 (PAD & PIPELINE DETAIL)


NBU 1022-12J1CS,
 NBU 1022-12J1BS, NBU 1022-12I4BS,
 NBU 1022-12I1CS & NBU 1022-12I1BS
 LOCATED IN SECTION 12, T10S, R22E,
 S.L.B.&M., UTAH COUNTY, UTAH



Scale: 1" = 500ft NAD83 USP Central
 Drawn: TL Date: 8 Mar 2011
 Revised: Date:

Sheet No:
15 15 of 17

RECEIVED: September 13, 2011

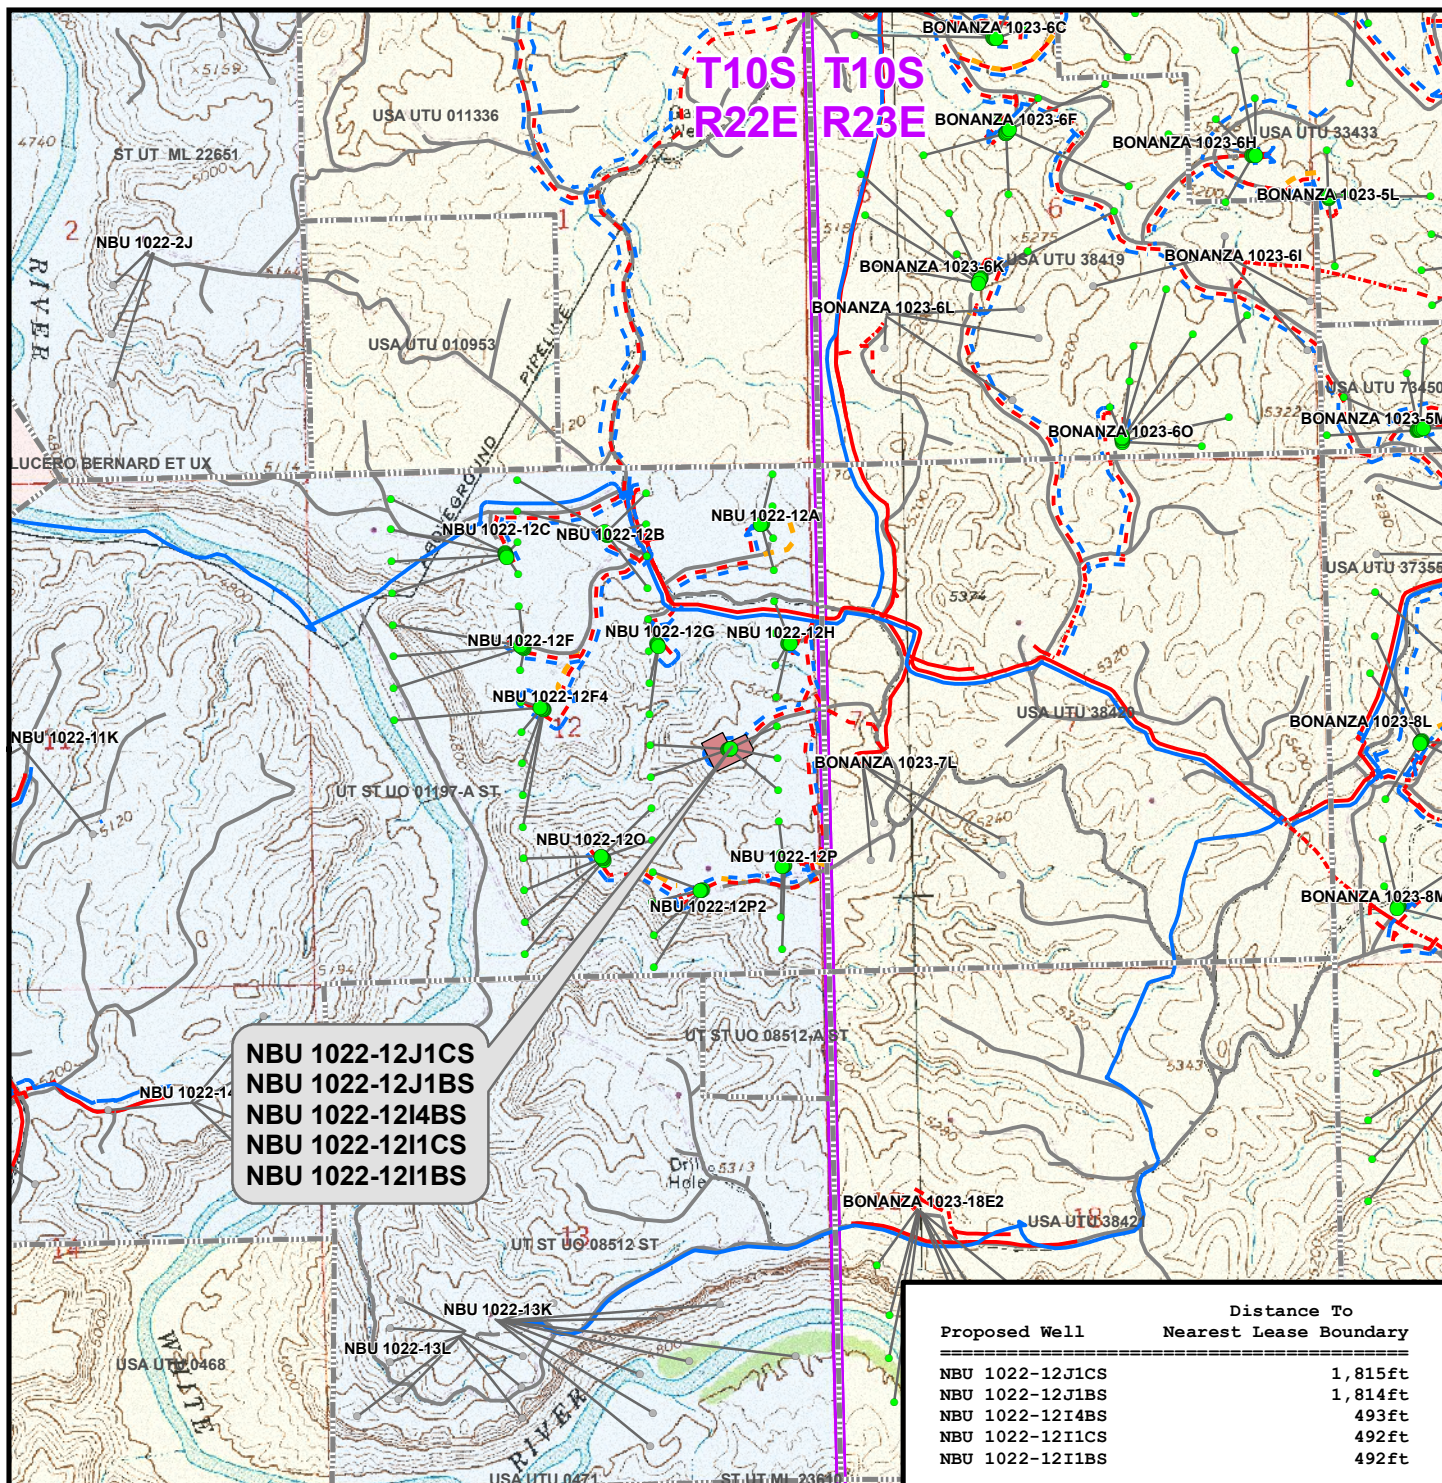

Legend

- Well - Proposed
- Bottom Hole - Proposed
- Bottom Hole - Existing
- Well Path
- Well Pad
- ▬ Lease Boundary
- Gas Pipeline - Proposed
- Gas Pipeline - To Be Upgraded
- Gas Pipeline - Existing
- Liquid Pipeline - Proposed
- Liquid Pipeline - Existing
- Road - Proposed
- Road - Existing
- Bureau of Land Management
- Indian Reservation
- State
- Private

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street, Denver, Colorado 80202

WELL PAD - NBU 1022-12I

TOPO E
NBU 1022-12J1CS,
NBU 1022-12J1BS, NBU 1022-12I4BS,
NBU 1022-12I1CS & NBU 1022-12I1BS
LOCATED IN SECTION 12, T10S, R22E,
S.L.B.&M., UTAH COUNTY, UTAH

609
CONSULTING, LLC
2155 North Main Street
Sheridan, WY 82801
Phone (307) 674-0609
Fax (307) 674-0182



Scale: 1" = 2,000ft

NAD83 USP Central

Sheet No:

Drawn: TL
Revised:

Date: 8 Mar 2011
Date:

16

16 of 17

RECEIVED: September 13, 2011

**Kerr-McGee Oil & Gas Onshore, LP
WELL PAD – NBU 1022-12I
WELLS – NBU 1022-12J1CS,
NBU 1022-12J1BS, NBU 1022-12I4BS,
NBU 1022-12I1CS & NBU 1022-12I1BS
Section 12, T10S, R22E, S.L.B.&M.**


From the intersection of U.S. Highway 40 and 500 East Street in Vernal, Utah, proceed in an easterly then southerly direction along U.S. Highway 40 approximately 3.3 miles to the junction of State Highway 45. Exit right and proceed in a southerly direction along State Highway 45 approximately 20.2 miles to the junction of the Glen Bench Road (County B Road 3260). Exit right and proceed in a southwesterly direction along the Glen Bench Road approximately 14.4 miles to the intersection of the Fidlar Road (County B Road 3410) which road intersection is approximately 400 feet northeast of the Mountain Fuel Bridge at the White River. Exit left and proceed in a southeasterly direction along the Fidlar Road approximately 4.4 miles to the intersection of the Seven Sisters Road (County B Road 3420). Exit right and proceed in a southeasterly, then southerly direction along the Seven Sisters Road approximately 5.3 miles to a service road to the northwest. Exit right and proceed in a northwesterly direction along the service road approximately 230 feet to the existing Bonanza 1023-7E well pad. Continue in a westerly direction through the existing Bonanza 1023-7E well pad approximately 350 feet to a second service road to the southwest. Proceed in a southwesterly direction along the second service road approximately 0.2 miles to the proposed well location.

Total distance from Vernal, Utah to the proposed well location is approximately 47.9 miles in a southerly direction.



API Well Number: 43047519700000



Project: UTAH - UTM (feet), NAD27, Zone 12N
 Site: NBU 1022-12I PAD
 Well: NBU 1022-12I1BS
 Wellbore: OH
 Design: PLAN #1 PRELIMINARY

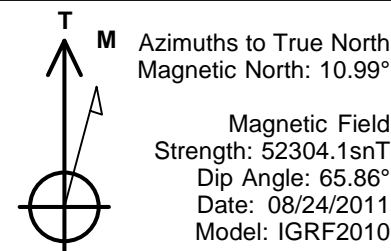

WELL DETAILS: NBU 1022-12I1BS								
GL 5222 & KB 4 @ 5226.00ft (ASSUMED)								
+N/-S	+E/-W	Northing	Easting	Latitude	Longitude			
0.00	0.00	14516563.61	2093905.04	39° 57' 45.594 N	109° 22' 53.958 W			
DESIGN TARGET DETAILS								
Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Shape
PBHL	8416.00	216.71	482.91	14516789.05	2094383.94	39° 57' 47.736 N	109° 22' 47.755 W	Circle (Radius: 25.00)
- plan hits target center								

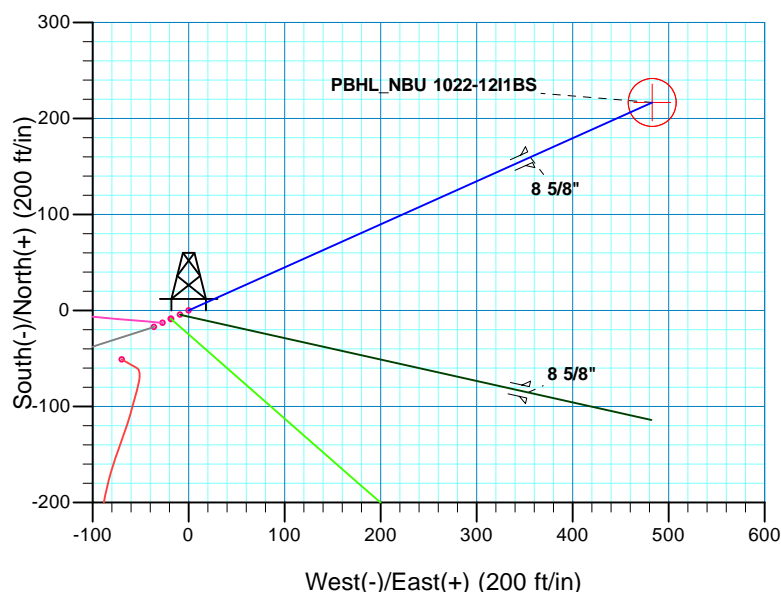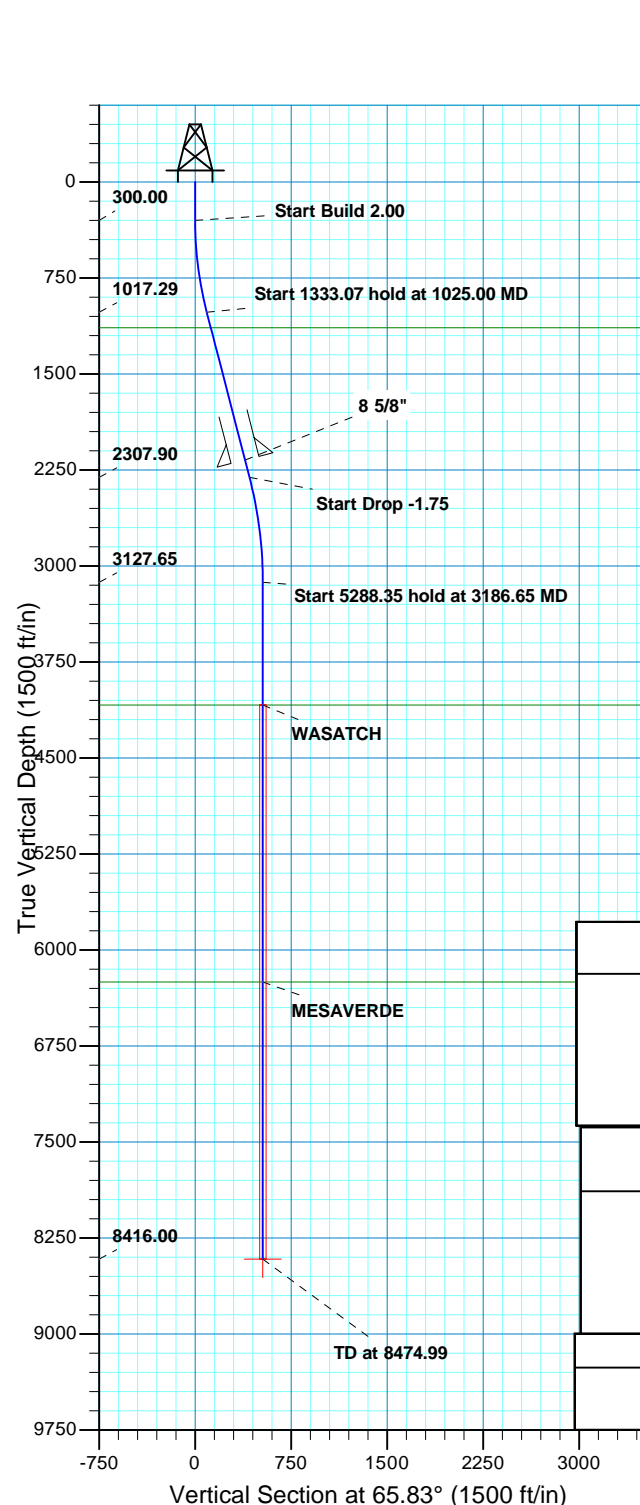

SECTION DETAILS									
MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	
1025.00	14.50	65.83	1017.29	37.36	83.25	2.00	65.83	91.25	
2358.07	14.50	65.83	2307.90	174.02	387.77	0.00	0.00	425.03	
3186.65	0.00	0.00	3127.65	216.71	482.91	1.75	180.00	529.31	
8474.99	0.00	0.00	8416.00	216.71	482.91	0.00	0.00	529.31	PBHL_NBU 1022-12I1BS
PROJECT DETAILS: UTAH - UTM (feet), NAD27, Zone 12N						FORMATION TOP DETAILS			
						TVDPath	MDPath	Formation	
Geodetic System: Universal Transverse Mercator (US Survey Feet) Datum: NAD 1927 (NADCON CONUS) Ellipsoid: Clarke 1866 Zone: Zone 12N (114 W to 108 W) Location: SECTION 12 T10S R22E System Datum: Mean Sea Level						1139.00	1150.72	GREEN RIVER	
						4087.00	4145.99	WASATCH	
						6251.00	6309.99	MESAVERDE	
						CASING DETAILS			
						TVD	MD	Name	Size
2173.00	2218.74	8 5/8"	8.625						
Plan: PLAN #1 PRELIMINARY (NBU 1022-12I1BS/OH)									
						Created By: RobertScott		Date: 14:25, August 24 2011	

RECEIVED



US ROCKIES REGION PLANNING

UTAH - UTM (feet), NAD27, Zone 12N

NBU 1022-12I PAD

NBU 1022-12I1BS

OH

Plan: PLAN #1 PRELIMINARY

Standard Planning Report

24 August, 2011



RECEIVED: September 13, 2011



SDI Planning Report



Database:	EDM5000-RobertS-Local	Local Co-ordinate Reference:	Well NBU 1022-1211BS
Company:	US ROCKIES REGION PLANNING	TVD Reference:	GL 5222 & KB 4 @ 5226.00ft (ASSUMED)
Project:	UTAH - UTM (feet), NAD27, Zone 12N	MD Reference:	GL 5222 & KB 4 @ 5226.00ft (ASSUMED)
Site:	NBU 1022-12I PAD	North Reference:	True
Well:	NBU 1022-1211BS	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1 PRELIMINARY		

Project	UTAH - UTM (feet), NAD27, Zone 12N		
Map System:	Universal Transverse Mercator (US Survey Feet)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	Zone 12N (114 W to 108 W)		

Site	NBU 1022-12I PAD, SECTION 12 T10S R22E		
Site Position:		Northing:	14,516,563.61 usft
From:	Lat/Long	Easting:	2,093,905.03 usft
Position Uncertainty:	0.00 ft	Slot Radius:	13.200 in
		Grid Convergence:	1.04 °

Well	NBU 1022-1211BS, 2350 FSL 974 FEL		
Well Position	+N/-S	0.00 ft	Northing: 14,516,563.61 usft
	+E/-W	0.00 ft	Easting: 2,093,905.03 usft
Position Uncertainty	0.00 ft	Wellhead Elevation:	Latitude: 39° 57' 45.594 N
			Longitude: 109° 22' 53.958 W
			Ground Level: 5,222.00 ft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	08/24/11	11.00	65.86	52,304

Design	PLAN #1 PRELIMINARY			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	65.83

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,025.00	14.50	65.83	1,017.29	37.36	83.25	2.00	2.00	0.00	65.83	
2,358.07	14.50	65.83	2,307.90	174.02	387.77	0.00	0.00	0.00	0.00	
3,186.65	0.00	0.00	3,127.65	216.71	482.91	1.75	-1.75	0.00	180.00	
8,474.99	0.00	0.00	8,416.00	216.71	482.91	0.00	0.00	0.00	0.00	PBHL_NBU 1022-12I



Database:	EDM5000-RobertS-Local	Local Co-ordinate Reference:	Well NBU 1022-1211BS
Company:	US ROCKIES REGION PLANNING	TVD Reference:	GL 5222 & KB 4 @ 5226.00ft (ASSUMED)
Project:	UTAH - UTM (feet), NAD27, Zone 12N	MD Reference:	GL 5222 & KB 4 @ 5226.00ft (ASSUMED)
Site:	NBU 1022-12I PAD	North Reference:	True
Well:	NBU 1022-1211BS	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1 PRELIMINARY		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Build 2.00									
400.00	2.00	65.83	399.98	0.71	1.59	1.75	2.00	2.00	0.00
500.00	4.00	65.83	499.84	2.86	6.37	6.98	2.00	2.00	0.00
600.00	6.00	65.83	599.45	6.43	14.32	15.69	2.00	2.00	0.00
700.00	8.00	65.83	698.70	11.41	25.44	27.88	2.00	2.00	0.00
800.00	10.00	65.83	797.47	17.82	39.71	43.52	2.00	2.00	0.00
900.00	12.00	65.83	895.62	25.63	57.11	62.60	2.00	2.00	0.00
1,000.00	14.00	65.83	993.06	34.84	77.64	85.10	2.00	2.00	0.00
1,025.00	14.50	65.83	1,017.29	37.36	83.25	91.25	2.00	2.00	0.00
Start 1333.07 hold at 1025.00 MD									
1,100.00	14.50	65.83	1,089.90	45.05	100.38	110.03	0.00	0.00	0.00
1,150.72	14.50	65.83	1,139.00	50.25	111.97	122.73	0.00	0.00	0.00
GREEN RIVER									
1,200.00	14.50	65.83	1,186.71	55.30	123.23	135.07	0.00	0.00	0.00
1,300.00	14.50	65.83	1,283.53	65.55	146.07	160.10	0.00	0.00	0.00
1,400.00	14.50	65.83	1,380.34	75.80	168.91	185.14	0.00	0.00	0.00
1,500.00	14.50	65.83	1,477.16	86.05	191.76	210.18	0.00	0.00	0.00
1,600.00	14.50	65.83	1,573.97	96.30	214.60	235.22	0.00	0.00	0.00
1,700.00	14.50	65.83	1,670.79	106.56	237.44	260.26	0.00	0.00	0.00
1,800.00	14.50	65.83	1,767.60	116.81	260.29	285.29	0.00	0.00	0.00
1,900.00	14.50	65.83	1,864.42	127.06	283.13	310.33	0.00	0.00	0.00
2,000.00	14.50	65.83	1,961.23	137.31	305.97	335.37	0.00	0.00	0.00
2,100.00	14.50	65.83	2,058.04	147.56	328.82	360.41	0.00	0.00	0.00
2,200.00	14.50	65.83	2,154.86	157.81	351.66	385.45	0.00	0.00	0.00
2,218.74	14.50	65.83	2,173.00	159.73	355.94	390.14	0.00	0.00	0.00
8 5/8"									
2,300.00	14.50	65.83	2,251.67	168.06	374.50	410.48	0.00	0.00	0.00
2,358.07	14.50	65.83	2,307.90	174.02	387.77	425.03	0.00	0.00	0.00
Start Drop -1.75									
2,400.00	13.77	65.83	2,348.56	178.21	397.11	435.26	1.75	-1.75	0.00
2,500.00	12.02	65.83	2,446.03	187.34	417.46	457.57	1.75	-1.75	0.00
2,600.00	10.27	65.83	2,544.14	195.25	435.09	476.89	1.75	-1.75	0.00
2,700.00	8.52	65.83	2,642.80	201.93	449.98	493.21	1.75	-1.75	0.00
2,800.00	6.77	65.83	2,741.91	207.38	462.11	506.51	1.75	-1.75	0.00
2,900.00	5.02	65.83	2,841.37	211.58	471.47	516.77	1.75	-1.75	0.00
3,000.00	3.27	65.83	2,941.11	214.54	478.06	523.99	1.75	-1.75	0.00
3,100.00	1.52	65.83	3,041.02	216.24	481.87	528.17	1.75	-1.75	0.00
3,186.65	0.00	0.00	3,127.65	216.71	482.91	529.31	1.75	-1.75	0.00
Start 5288.35 hold at 3186.65 MD									
3,200.00	0.00	0.00	3,141.01	216.71	482.91	529.31	0.00	0.00	0.00
3,300.00	0.00	0.00	3,241.01	216.71	482.91	529.31	0.00	0.00	0.00
3,400.00	0.00	0.00	3,341.01	216.71	482.91	529.31	0.00	0.00	0.00
3,500.00	0.00	0.00	3,441.01	216.71	482.91	529.31	0.00	0.00	0.00
3,600.00	0.00	0.00	3,541.01	216.71	482.91	529.31	0.00	0.00	0.00
3,700.00	0.00	0.00	3,641.01	216.71	482.91	529.31	0.00	0.00	0.00
3,800.00	0.00	0.00	3,741.01	216.71	482.91	529.31	0.00	0.00	0.00
3,900.00	0.00	0.00	3,841.01	216.71	482.91	529.31	0.00	0.00	0.00



SDI
Planning Report



Database:	EDM5000-RobertS-Local	Local Co-ordinate Reference:	Well NBU 1022-121BS
Company:	US ROCKIES REGION PLANNING	TVD Reference:	GL 5222 & KB 4 @ 5226.00ft (ASSUMED)
Project:	UTAH - UTM (feet), NAD27, Zone 12N	MD Reference:	GL 5222 & KB 4 @ 5226.00ft (ASSUMED)
Site:	NBU 1022-12I PAD	North Reference:	True
Well:	NBU 1022-121BS	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1 PRELIMINARY		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,000.00	0.00	0.00	3,941.01	216.71	482.91	529.31	0.00	0.00	0.00
4,100.00	0.00	0.00	4,041.01	216.71	482.91	529.31	0.00	0.00	0.00
4,145.99	0.00	0.00	4,087.00	216.71	482.91	529.31	0.00	0.00	0.00
WASATCH									
4,200.00	0.00	0.00	4,141.01	216.71	482.91	529.31	0.00	0.00	0.00
4,300.00	0.00	0.00	4,241.01	216.71	482.91	529.31	0.00	0.00	0.00
4,400.00	0.00	0.00	4,341.01	216.71	482.91	529.31	0.00	0.00	0.00
4,500.00	0.00	0.00	4,441.01	216.71	482.91	529.31	0.00	0.00	0.00
4,600.00	0.00	0.00	4,541.01	216.71	482.91	529.31	0.00	0.00	0.00
4,700.00	0.00	0.00	4,641.01	216.71	482.91	529.31	0.00	0.00	0.00
4,800.00	0.00	0.00	4,741.01	216.71	482.91	529.31	0.00	0.00	0.00
4,900.00	0.00	0.00	4,841.01	216.71	482.91	529.31	0.00	0.00	0.00
5,000.00	0.00	0.00	4,941.01	216.71	482.91	529.31	0.00	0.00	0.00
5,100.00	0.00	0.00	5,041.01	216.71	482.91	529.31	0.00	0.00	0.00
5,200.00	0.00	0.00	5,141.01	216.71	482.91	529.31	0.00	0.00	0.00
5,300.00	0.00	0.00	5,241.01	216.71	482.91	529.31	0.00	0.00	0.00
5,400.00	0.00	0.00	5,341.01	216.71	482.91	529.31	0.00	0.00	0.00
5,500.00	0.00	0.00	5,441.01	216.71	482.91	529.31	0.00	0.00	0.00
5,600.00	0.00	0.00	5,541.01	216.71	482.91	529.31	0.00	0.00	0.00
5,700.00	0.00	0.00	5,641.01	216.71	482.91	529.31	0.00	0.00	0.00
5,800.00	0.00	0.00	5,741.01	216.71	482.91	529.31	0.00	0.00	0.00
5,900.00	0.00	0.00	5,841.01	216.71	482.91	529.31	0.00	0.00	0.00
6,000.00	0.00	0.00	5,941.01	216.71	482.91	529.31	0.00	0.00	0.00
6,100.00	0.00	0.00	6,041.01	216.71	482.91	529.31	0.00	0.00	0.00
6,200.00	0.00	0.00	6,141.01	216.71	482.91	529.31	0.00	0.00	0.00
6,300.00	0.00	0.00	6,241.01	216.71	482.91	529.31	0.00	0.00	0.00
6,309.99	0.00	0.00	6,251.00	216.71	482.91	529.31	0.00	0.00	0.00
MESAVERDE									
6,400.00	0.00	0.00	6,341.01	216.71	482.91	529.31	0.00	0.00	0.00
6,500.00	0.00	0.00	6,441.01	216.71	482.91	529.31	0.00	0.00	0.00
6,600.00	0.00	0.00	6,541.01	216.71	482.91	529.31	0.00	0.00	0.00
6,700.00	0.00	0.00	6,641.01	216.71	482.91	529.31	0.00	0.00	0.00
6,800.00	0.00	0.00	6,741.01	216.71	482.91	529.31	0.00	0.00	0.00
6,900.00	0.00	0.00	6,841.01	216.71	482.91	529.31	0.00	0.00	0.00
7,000.00	0.00	0.00	6,941.01	216.71	482.91	529.31	0.00	0.00	0.00
7,100.00	0.00	0.00	7,041.01	216.71	482.91	529.31	0.00	0.00	0.00
7,200.00	0.00	0.00	7,141.01	216.71	482.91	529.31	0.00	0.00	0.00
7,300.00	0.00	0.00	7,241.01	216.71	482.91	529.31	0.00	0.00	0.00
7,400.00	0.00	0.00	7,341.01	216.71	482.91	529.31	0.00	0.00	0.00
7,500.00	0.00	0.00	7,441.01	216.71	482.91	529.31	0.00	0.00	0.00
7,600.00	0.00	0.00	7,541.01	216.71	482.91	529.31	0.00	0.00	0.00
7,700.00	0.00	0.00	7,641.01	216.71	482.91	529.31	0.00	0.00	0.00
7,800.00	0.00	0.00	7,741.01	216.71	482.91	529.31	0.00	0.00	0.00
7,900.00	0.00	0.00	7,841.01	216.71	482.91	529.31	0.00	0.00	0.00
8,000.00	0.00	0.00	7,941.01	216.71	482.91	529.31	0.00	0.00	0.00
8,100.00	0.00	0.00	8,041.01	216.71	482.91	529.31	0.00	0.00	0.00
8,200.00	0.00	0.00	8,141.01	216.71	482.91	529.31	0.00	0.00	0.00
8,300.00	0.00	0.00	8,241.01	216.71	482.91	529.31	0.00	0.00	0.00
8,400.00	0.00	0.00	8,341.01	216.71	482.91	529.31	0.00	0.00	0.00
8,474.99	0.00	0.00	8,416.00	216.71	482.91	529.31	0.00	0.00	0.00
PBHL_NBU 1022-121BS									

Database:	EDM5000-RobertS-Local	Local Co-ordinate Reference:	Well NBU 1022-1211BS
Company:	US ROCKIES REGION PLANNING	TVD Reference:	GL 5222 & KB 4 @ 5226.00ft (ASSUMED)
Project:	UTAH - UTM (feet), NAD27, Zone 12N	MD Reference:	GL 5222 & KB 4 @ 5226.00ft (ASSUMED)
Site:	NBU 1022-12I PAD	North Reference:	True
Well:	NBU 1022-1211BS	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1 PRELIMINARY		

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
PBHL_NBU 1022-1211B - plan hits target center - Circle (radius 25.00)	0.00	0.00	8,416.00	216.71	482.91	14,516,789.05	2,094,383.93	39° 57' 47.736 N	109° 22' 47.755 W

Casing Points					
Measured Depth (ft)	Vertical Depth (ft)	Name	Casing Diameter (in)	Hole Diameter (in)	
2,218.74	2,173.00	8 5/8"	8.625	11.000	

Formations					
Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)
1,150.72	1,139.00	GREEN RIVER			
4,145.99	4,087.00	WASATCH			
6,309.99	6,251.00	MESAVERDE			

Plan Annotations					
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates			
		+N/-S (ft)	+E/-W (ft)	Comment	
300.00	300.00	0.00	0.00	Start Build 2.00	
1,025.00	1,017.29	37.36	83.25	Start 1333.07 hold at 1025.00 MD	
2,358.07	2,307.90	174.02	387.77	Start Drop -1.75	
3,186.65	3,127.65	216.71	482.91	Start 5288.35 hold at 3186.65 MD	
8,474.99	8,416.00	216.71	482.91	TD at 8474.99	

NBU 1022-12I1BS/ 1022-12I1CS/
1022-12I4BS/ 1022-12J1BS/ 1022-12J1CS

Surface Use Plan of Operations
1 of 9

NBU 1022-12I1BS			
Surface:	2350 FSL / 974 FEL	NESE	Lot
BHL:	2568 FSL / 492 FEL	NESE	Lot
NBU 1022-12I1CS			
Surface:	2345 FSL / 984 FEL	NESE	Lot
BHL:	2237 FSL / 492 FEL	NESE	Lot
NBU 1022-12I4BS			
Surface:	2341 FSL / 993 FEL	NESE	Lot
BHL:	1905 FSL / 493 FEL	NESE	Lot
NBU 1022-12J1BS			
Surface:	2337 FSL / 1002 FEL	NESE	Lot
BHL:	2402 FSL / 1814 FEL	NWSE	Lot
NBU 1022-12J1CS			
Surface:	2333 FSL / 1011 FEL	NESE	Lot
BHL:	2071 FSL / 1815 FEL	NWSE	Lot

Pad: NBU 1022-12I PAD

Section 12 T10S R22E

Mineral Lease: UT ST UO 01197-A ST

Uintah County, Utah

Operator: Kerr-McGee Oil & Gas Onshore LP

This SUPO contains surface operating procedures for Kerr-McGee Oil & Gas Onshore LP (KMG), a wholly owned subsidiary of Anadarko Petroleum Corporation (APC) pertaining to actions that involve the State of Utah School and Institutional Trust Lands Administration (SITLA) in the development of minerals leased to APC/KMG (including but not limited to, APDs/SULAs/ROEs/ROWs and/or easements.)

See associated Utah Division of Oil, Gas, and Mining (UDOGM) Form 3(s), plats, maps, and other attachments for site-specific information on projects represented herein.

In accordance with Utah Oil & Gas Conservation Rule R649-3-11 pertaining to Directional Drilling, these wells will be directionally drilled. Refer to Topo Map A for directions to the location and Topo Maps A and B for location of access roads within a 2-mile radius.

A. Existing Roads:

Existing roads consist of county and improved/unimproved lease roads. KMG will maintain existing roads in a condition that is the same as or better than before operations began and in a safe and usable condition. Maintenance

of existing roads will continue until final abandonment and reclamation of well pads and/or other facilities. The road maintenance may include, but is not limited to, blading, ditching, culvert installation/cleanout, surfacing, and dust control.

Typically, roads, gathering lines and electrical distribution lines will occupy common disturbance corridors and roadways will be used as working space. All disturbances located in the same corridor will overlap each other to the maximum extent possible; in no case will the maximum disturbance width of the access road and utility corridors exceed 50', unless otherwise approved.

B. Planned Access Roads:

No new access road is proposed. (see Topo Map B). Applicable Uintah County encroachment and/or pipeline crossing permits will be obtained prior to construction/development. No other pipelines will be crossed at this location.

If there are roads that are new or to be reconstructed, they will be located, designed, and maintained to meet the standards of SITLA and other commonly accepted Best Management Practices (BMPs). If a new road/corridor were to cross a water of the United States, KMG will adhere to the requirements of applicable Nationwide or Individual Permits of the Department of Army Corps of Engineers.

During the onsite, turnouts, major cut and fills, culverts, bridges, gates, cattle guards, low water crossings, or modifications needed to existing infrastructure/facilities were determined, as applicable, are typically shown on attached Exhibits and Topo maps.

C. Location of Existing and Proposed Facilities:

This pad will expand the existing pad for the NBU 1022-12I. The NBU 1022-12I well location is a vertical producing well according to Utah Division of Oil, Gas and Mining (UDOGM) records as of September 8, 2011

Production facilities (see Well Pad Design Summary and Facilities Diagram):

Production facilities will be installed on the disturbed portion of the well pad and may include bermed components (typically excluding dehy's and/or separators) that contain fluids (i.e. production tanks, produced liquids tanks). The berms will be constructed of compacted subsoil or corrugated metal, impervious, designed to hold 110% of the capacity of the largest tank, and be independent of the back cut. All permanent (on-site six months or longer) above ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earth-tone color chosen at the onsite in coordination with SITLA.

Gathering Facilities:

The following pipeline transmission facilities will apply if the well is productive (see Topo D):

The total gas gathering (steel line pipe with fusion bond epoxy coating) pipeline distances from the meter to the tie in point is $\pm 2,020'$ and the individual segments are broken up as follows:

- ±460' (0.1 miles) –New 6" buried gas pipeline from the meter to the edge of the pad. Please refer to Topo D2 - Pad and Pipeline Detail.
- ±690' (0.1 miles) –New 6" buried gas pipeline from the edge of pad to the tie-in at the proposed 1022-12P Intersection 12" gas pipeline. Please refer to Topo D & D2.
- ±210' (0.04 miles) –New 12" buried gas pipeline from the proposed 1022-12P Intersection 12" gas pipeline to the tie-in at the proposed 1023-7L Intersection 12" gas pipeline. Please refer to Topo D & D2.
- ±660' (0.1 miles) –New 12" buried gas pipeline from the proposed 1023-7L Intersection 12" gas pipeline to the tie-in at the proposed 1022-12H Intersection 12" gas pipeline. Please refer to Topo D & D2.

The total liquid gathering pipeline distance from the separator to the tie in point is ±2,020' and the individual segments are broken up as follows:

- ±460' (0.1 miles) –New 6" buried liquid pipeline from the separator to the edge of the pad. Please refer to Topo D2 - Pad and Pipeline Detail.
- ±690' (0.1 miles) –New 6" buried liquid pipeline from the edge of pad to the tie-in at the proposed 1022-12P Intersection 6" liquid pipeline. Please refer to Topo D & D2.
- ±210' (0.04 miles) –New 6" buried liquid pipeline from the tie-in at the proposed 1022-12P Intersection 6" liquid pipeline to the tie-in at the proposed 1023-7L Intersection 6" liquid pipeline. Please refer to Topo D & D2.
- ±660' (0.13 miles) –New 6" buried liquid pipeline from the tie-in at the proposed 1023-7L Intersection 6" liquid pipeline to the tie-in at the proposed 1022-12H Intersection 6" liquid pipeline. Please refer to Topo D & D2.

The liquid gathering lines will be made of polyethylene or a composite polyethylene/steel or polyethylene/fiberglass that is not subject to internal or external pipe corrosion. The content of the produced fluids to be transferred by the liquid gathering system will be approximately 92% produced water and 8% condensate. Trunk line valve connections for the water gathering system will be below ground but accessible from the surface in order to prevent freezing during winter time.

The proposed pipelines will be buried and will include gas gathering and liquid gathering pipelines in the same trench. Where the pipeline is adjacent to the road or well pad, the road and/or well pad will be utilized for construction activities and staging. KMG requests a permanent 30' right-of-way adjacent to the road for life-of-project for maintenance, repairs, and/or upgrades, no additional right-of-way will be needed beyond the 30'. Where the pipeline is not adjacent to the road or well pad, KMG requests a temporary 45' construction right-of-way 30' permanent right-of-way.

The proposed trench width for the pipeline would range from 18-48 inches and will be excavated to a depth of 48 to 60 inches of normal soil cover or 24 inches of cover in consolidated rock. During construction blasting may occur along the proposed right-of-way where trenching equipment cannot cut into the bedrock. Large debris and rocks removed from the earth during trenching and blasting that could not be returned to the trench would be distributed evenly and naturally in the project area. The proposed pipelines will be pressure tested pneumatically (depending on size) or with fluids (either fresh or produced). If fluids are used, there will be no discharge to the surface.

Pipeline signs will be installed along the right-of-way to indicate the pipeline proximity and ownership, as well as to provide emergency contact phone numbers. Above ground valves, T's, and/or cathodic protection will be installed at various locations for connection, corrosion prevention and/or for safety purposes.

D. Location and Type of Water Supply:

Water for drilling purposes will be obtained from one of the following sources:

- Dalbo Inc.'s underground well located in Ouray, Utah, Sec. 32 T4S R3E, Water User Claim number 43-8496, application number 53617.
- Price Water Pumping Inc. Green River and White River, various sources, Water Right Number 49-1659, application number: a35745.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

E. Source of Construction Materials:

Construction operations will typically be completed with native materials found on location. If needed, construction materials that must be imported to the site (mineral material aggregate, soils or materials suitable for fill/surfacing) will be obtained from a nearby permitted source and described in subsequent Sundry requests. No construction materials will be removed from State lands without prior approval from SITLA.

F. Methods for Handling Waste Materials:

Should the well be productive, produced water will be contained in a water tank and will be transported by pipeline and/or truck to an approved disposal sites facilities and/or Salt Water Disposal (SWD) injection well. Currently, those facilities are:

RNI in Sec. 5 T9S R22E
Ace Oilfield in Sec. 2 T6S R20E
MC&MC in Sec. 12 T6S R19E
Pipeline Facility in Sec. 36 T9S R20E
Goat Pasture Evaporation Pond in SW/4 Sec. 16 T10S R22E
Bonanza Evaporation Pond in Sec. 2 T10S R23E
Ouray #1 SWD in Sec. 1 T9S R21E
NBU 159 SWD in Sec. 35 T9S R21E
CIGE 112D SWD in Sec. 19 T9S R21E
CIGE 114 SWD in Sec. 34 T9S R21E
NBU 921-34K SWD in Sec. 34 T9S R21E
NBU 921-33F SWD in Sec. 33 T9S R21E
NBU 921-34L SWD in Sec. 34 T9S R21E

Drill cuttings and/or fluids will be contained in the reserve/frac pit. Cuttings will be buried in pit(s) upon closure. Unless otherwise approved, no oil or other oil-based drilling additives, chromium/metals-based, or saline muds will be used during drilling. Only fresh water (as specified above), biodegradable polymer soap, bentonite clay, and/or non-toxic additives will be used in the mud system.

Pits will be constructed to minimize the accumulation of surface runoff. Should fluid hydrocarbons be encountered during drilling, completions or well testing, product will either be contained in test tanks on the well site or evacuated by vacuum trucks and transported to an approved disposal/sales facility. Should petroleum hydrocarbons unexpectedly be released into a pit, they will be removed as soon as practical but in no case will they remain longer than 72 hours unless an alternate is approved by SITLA. Should timely removal prove infeasible, the pit will be netted with mesh no larger than 1 inch until such time as hydrocarbons can be removed. Hydrocarbon removal will also take place prior to the closure of the pit, unless authorization is provided for disposal via alternative pit closure methods (e.g. solidification.)

The reserve and/or fracture stimulation pit will be lined with a synthetic material 20 mil or thicker. The liner will be installed over smooth fill subgrade that is free of pockets, loose rocks, or other materials (i.e. sand, sifted dirt, bentonite, straw, etc.) that could damage the liner. Any additional pits necessary for subsequent operations, such as temporary flare or workover pits, will be contained within the originally approved well pad and disturbance boundaries. Such temporary pits will be backfilled and reclaimed within 180 days of completion of work at a well location.

For the protection of livestock and wildlife, all open pits and cellars will be fenced/covered to prevent wildlife or livestock entry. Total height of pit fencing will be at least 42 inches and corner posts will be cemented and/or braced in such a manner as to keep the fence tight at all times. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

Pits containing drilling cuttings, mud, and/or completions fluids will be allowed to dry. Any free fluids remaining after six (6) months from reaching total depth, date of completion, and/or determination of inactivity will be removed (as weather conditions allow) to an approved site and the pit reclaimed. Additional drying methods may include fly-ash solidification or sprinkler evaporation. Installation and operation of any sprinklers, pumps, and equipment will ensure that water spray or mist does not drift. Reserve pit liners will be cut off or folded as near to the mud surface as possible and as safety considerations allow and buried on location.

No garbage or non-exempt substances as defined by Resource Conservation and Recovery Act (RCRA) subtitle C will be placed in the reserve pit. All refuse generated during construction, drilling, completion, and well testing activities will be contained in an enclosed receptacle, removed from the drill locations promptly, and transported to an approved disposal facility.

Portable, self-contained chemical toilets and/or sewage processing facilities will be provided for human waste disposal. Upon completion of operations, or as required, the toilet holding tanks will be pumped and the contents disposed of in an approved sewage disposal facility. All applicable regulations pertaining to disposal of human and solid waste will be observed.

Any undesirable event, including accidental release of fluids, or release in excess of reportable quantities, will be managed according to the notification requirements of UDOGMs "Reporting Oil and Gas Undesirable Events" rule. Where State wells are participatory to a Federal agreement, according to NTL-3A, the appropriate Federal agencies will be notified.

Materials Management

Hazardous materials above reportable quantities will not be produced by drilling or completing proposed wells or constructing the pipelines/facilities. The term “hazardous materials” as used here means: (1) any substance, pollutant, or containment listed as hazardous under the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) of 1980, as amended 42 U.S.C. 9601 et seq., and the regulations issued under CERCLA; and (2) any hazardous waste as defined in RCRA of 1976, as amended. In addition, no extremely hazardous substance, as defined in 40 CFR 355, in threshold planning quantities, would be used, produced, stored, transported, or disposed of while producing any well.

Chemicals subject to reporting under Title III of the Superfund Amendments and Reauthorization Act (SARA) in quantities of 10,000 pounds or more may be produced and/or stored at production facilities and may be kept in limited quantities on drilling sites and well locations for short periods of time during drilling or completion activities.

G. Ancillary Facilities:

None are anticipated.

H. Well Site Layout (see Well Pad Design Summary):

The location, orientation and aerial extent of each drill pad; reserve/completion/flare pit; access road ingress/egress points, drilling rig, dikes/ditches, existing wells/infrastructure; proposed cuts and fills; and topsoil and spoil material stockpile locations are depicted on the exhibits for each project, where applicable. Site-specific conditions may require slight deviation in actual equipment and facility layout; however, the area of disturbance, as described in the survey, will not be exceeded.

Coordinates are provided in the National Spatial Reference System, North American Datum, 1927 (NAD27) or latest edition. Distances are depicted on each plat to the nearest two adjacent section lines.

I. Plans for Reclamation of the Surface:

Surface reclamation will be undertaken in two phases: interim and final. Interim reclamation is conducted following well completion and extends through the period of production. This reclamation is for the area of the well pad that is not required for production activities. Final reclamation is conducted following well plugging/conversion and/or facility abandonment processes.

Reclamation activities in both phases may include but is not limited to the re-contouring or re-configuration of topographic surfaces, restoration of drainage systems, segregation of spoils materials, minimizing surface disturbance, re-evaluating backfill requirements, pit closure, topsoil redistribution, soil treatments, seeding and weed control.

Interim Reclamation

Interim reclamation includes pit closure, re-contouring (where possible), soil bed preparation, topsoil placement, seeding, and/or weed control.

Interim re-contouring involves bringing all construction material from cuts and fills back onto the well pad and site and reestablishing the natural contours where desirable and practical. Fill and stockpiled spoils no longer necessary to the operation will be spread on the cut slopes and covered with stockpiled topsoil. All stockpiled top soils will be used for interim reclamation where practical to maintain soil viability. Where possible, the land surface will be left "rough" after re-contouring to ensure that the maximum surface area will be available to support the reestablishment of vegetative cover.

A reserve pit, upon being allowed to dry, will be backfilled and compacted with cover materials that are void of any topsoil, vegetation, large stones, rocks or foreign objects. Soils that are moisture laden, saturated, or partially/completely frozen will not be used for backfill or cover. The pit area will be mounded to allow for settling and to promote positive surface drainage away from the pit.

Final Reclamation

Final reclamation will be performed for newly drilled unproductive wells and/or at the end of the life of a productive well. As soon as practical after the conclusion of drilling and testing operations, unproductive drill holes will be plugged and abandoned (P&A). Site and road reclamation will commence following plugging. In no case will reclamation at non-producing locations be initiated later than six (6) months from the date a well is plugged. A joint inspection of the disturbed area to be reclaimed may be requested by KMG. The primary purpose of this inspection will be to review the existing conditions, or agree upon a revised final reclamation and abandonment plan. A Notice of Intent to Abandon will be filed for final recommendations regarding surface reclamation.

After plugging, all wellhead equipment that is no longer needed will be removed, and the well site will be reclaimed. Final contouring will blend with and follow as closely as practical the natural terrain and contours of the original site and surrounding areas. After re-contouring, final grading will be conducted over the entire surface of the well site and access road. Where practical, the area will be ripped to a depth of 18 to 24 inches on 18 to 24-inch centers and surface materials will be pitted with small depressions to form longitudinal depressions 12 to 18 inches deep perpendicular to the natural flow of water.

All unnecessary surface equipment and structures (e.g. cattle guards) and water control structures (e.g. culverts, drainage pipes) not needed to facilitate successful reclamation will be removed during final reclamation. Roads that will be reclaimed will be ripped to a depth of 18 inches where practical, re-contoured to approximate the original contour of the ground and seeded.

Upon successfully completing reclamation of a P&A location, a Final Abandonment Notice will be submitted to UDOGM.

Seeding and Measures Common to Interim and Final Reclamation

Reclaimed areas may be fenced to exclude grazing and encourage re-vegetation.

On slopes where severe erosion can become a problem and the use of machinery is not practical, seed will be hand broadcast and raked with twice the specified amount of seed. The slope will be stabilized using materials specifically designed to prevent erosion on steep slopes and hold seed in place so vegetation can become permanently established. These materials will include, but are not limited to, erosion control blankets and bonded fiber matrix at a rate to achieve a minimum of 80 percent soil coverage.

NBU 1022-12I1BS/ 1022-12I1CS/
1022-12I4BS/ 1022-12J1BS/ 1022-12J1CS

Surface Use Plan of Operations
8 of 9

Seeding will occur year-round as conditions allow. Seed mixes appropriate to the native plant community as determined and specified for each project location based on the site specific soils will be used for re-vegetation. The site specific seed mix will be provided by SITLA.

J. Surface/Mineral Ownership:

SITLA
675 East 500 South, Suite 500
Salt Lake City, UT 84102

L. Other Information:

None

NBU 1022-12I1BS/ 1022-12I1CS/
1022-12I4BS/ 1022-12J1BS/ 1022-12J1CS

Surface Use Plan of Operations
9 of 9

M. Lessee's or Operators' Representative & Certification:

Gina T. Becker
Regulatory Analyst II
Kerr-McGee Oil & Gas Onshore LP
PO Box 173779
Denver, CO 80217-3779
(720) 929-6086

Tommy Thompson
General Manager, Drilling
Kerr-McGee Oil & Gas Onshore LP
PO Box 173779
Denver, CO 80217-3779
(720) 929-6724

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Kerr-McGee Oil & Gas Onshore LP is considered to be the operator of the subject well. Kerr-McGee Oil & Gas Onshore LP agrees to be responsible under terms and conditions of the lease for the operations conducted upon leased lands.

Bond coverage for State lease activities is provided by State Surety Bond 22013542, and for applicable Federal lease activities and pursuant to 43 CFR 3104, by Bureau of Land Management Nationwide Bond WYB000291.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that I have full knowledge of the State and Federal laws applicable to this operation; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.


Gina T. Becker

September 8, 2011
Date



Joseph D. Johnson
1099 18TH STREET STE. 1800 • DENVER, CO
80202
720-929-6708 • FAX 720-929-7708
E-MAIL: JOE.JOHNSON@ANADARKO.COM

September 7, 2011

Ms. Diana Mason
Division of Oil, Gas and Mining
P.O. Box 145801
Salt Lake City, UT 84114-6100

Re: Directional Drilling R649-3-11
NBU 1022-12I1BS
10S-22E-Sec. 12
NESE/NESE
Surface: 2350' FSL, 974' FEL
Bottom Hole: 2568' FSL, 492' FEL
Uintah County, Utah

Dear Ms. Mason:

Pursuant to the filing of Kerr-McGee Oil & Gas Onshore LP's (Kerr-McGee) Application for Permit to Drill regarding the above referenced well, we are hereby submitting this letter in accordance with Oil & Gas Conservation Rule R649-3-11 pertaining to the Exception to Location and Siting of Wells.

- Kerr-McGee's NBU 1022-12I1BS is located within the Natural Buttes Unit area.
- Kerr-McGee is permitting this well as a directional well in order to minimize surface disturbance. Locating the well at the surface location and directionally drilling from this location, Kerr-McGee will be able to utilize the existing road and pipelines in the area.
- Furthermore, Kerr-McGee certifies that it is the sole working interest owner within 460 feet of the entire directional well bore.

Therefore, based on the above stated information Kerr-McGee Oil & Gas Onshore LP requests the permit be granted pursuant to R649-3-11.


Sincerely,

KERR-MCGEE OIL & GAS ONSHORE LP

A handwritten signature in blue ink, appearing to read 'JDJ', with a horizontal line underneath.



Joseph D. Johnson
Landman

RECEIVED: September 13, 2011

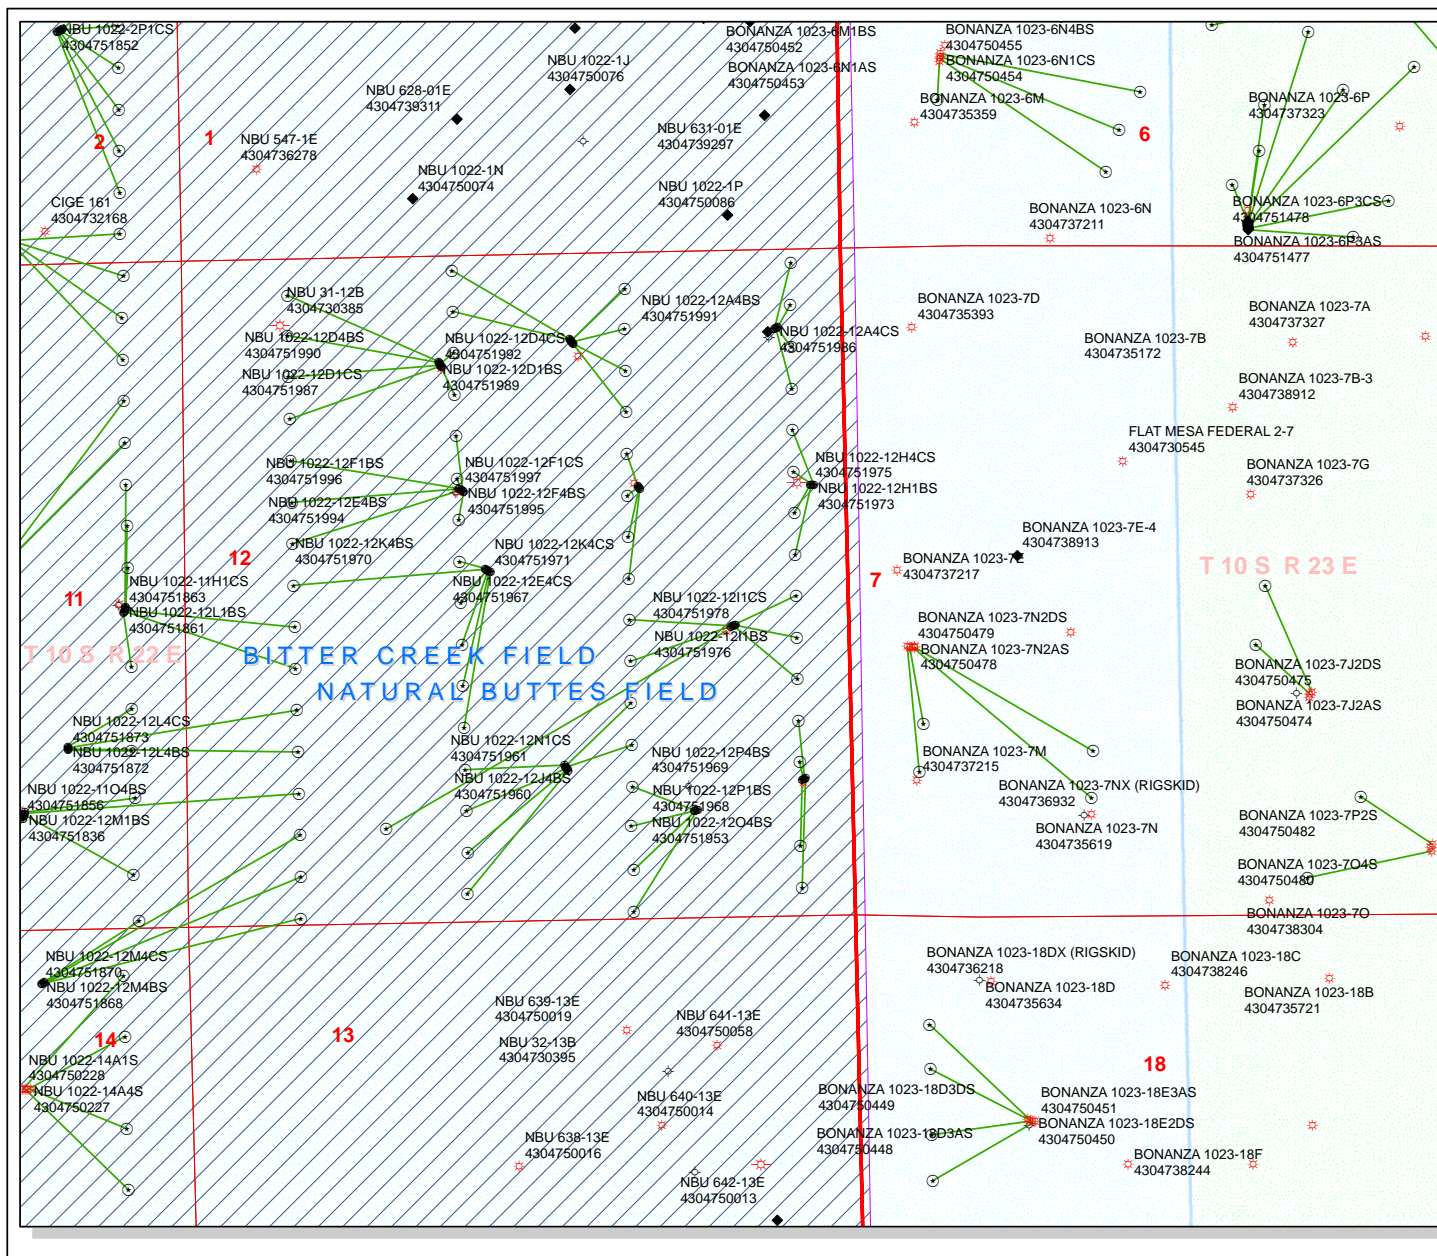

API Number: 4304751976
Well Name: NBU 1022-12H1BS
Township T10. Range R2.2. Section 12
Meridian: SLBM
Operator: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Map Prepared:
 Map Produced by Diana Mason



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office

P.O. Box 45155

Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:

3160

(UT-922)

September 19, 2011

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2011 Plan of Development Natural Buttes Unit
Uintah County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2011 within the Natural Buttes Unit, Uintah County, Utah.

API #	WELL NAME	LOCATION
-------	-----------	----------

(Proposed PZ WASATCH-MESA VERDE)

NBU 1022-12H PAD

43-047-51941	NBU 1022-12H4BS	Sec 12 T10S R22E 1846 FNL 0361 FEL
	BHL	Sec 12 T10S R22E 2071 FNL 0491 FEL

43-047-51942	NBU 1022-12H1CS	Sec 12 T10S R22E 1843 FNL 0341 FEL
	BHL	Sec 12 T10S R22E 1740 FNL 0491 FEL

43-047-51973	NBU 1022-12H1BS	Sec 12 T10S R22E 1842 FNL 0331 FEL
	BHL	Sec 12 T10S R22E 1408 FNL 0491 FEL

43-047-51975	NBU 1022-12H4CS	Sec 12 T10S R22E 1845 FNL 0351 FEL
	BHL	Sec 12 T10S R22E 2402 FNL 0492 FEL

NBU 1022-12O PAD

43-047-51943	NBU 1022-12N4BS	Sec 12 T10S R22E 1224 FSL 2329 FEL
	BHL	Sec 12 T10S R22E 0580 FSL 2150 FWL

43-047-51945	NBU 1022-12N4CS	Sec 12 T10S R22E 1216 FSL 2323 FEL
	BHL	Sec 12 T10S R22E 0251 FSL 2141 FWL

43-047-51956	NBU 1022-12J4CS	Sec 12 T10S R22E 1240 FSL 2341 FEL
	BHL	Sec 12 T10S R22E 1409 FSL 1817 FEL

43-047-51959	NBU 1022-12N1BS	Sec 12 T10S R22E 1257 FSL 2352 FEL
	BHL	Sec 12 T10S R22E 1242 FSL 2147 FWL

43-047-51960	NBU 1022-12J4BS	Sec 12 T10S R22E 1249 FSL 2346 FEL
	BHL	Sec 12 T10S R22E 1740 FSL 1816 FEL

RECEIVED: September 20, 2011

API #	WELL NAME	LOCATION
(Proposed PZ WASATCH-MESA VERDE)		
43-047-51961	NBU 1022-12N1CS	Sec 12 T10S R22E 1232 FSL 2335 FEL
	BHL	Sec 12 T10S R22E 0911 FSL 2149 FWL
NBU 1022-12B PAD		
43-047-51944	NBU 1022-12B1BS	Sec 12 T10S R22E 0668 FNL 2232 FEL
	BHL	Sec 12 T10S R22E 0259 FNL 1797 FEL
43-047-51979	NBU 1022-12C1BS	Sec 12 T10S R22E 0651 FNL 2244 FEL
	BHL	Sec 12 T10S R22E 0089 FNL 2138 FWL
43-047-51980	NBU 1022-12B1CS	Sec 12 T10S R22E 0676 FNL 2227 FEL
	BHL	Sec 12 T10S R22E 0579 FNL 1806 FEL
43-047-51981	NBU 1022-12C1CS	Sec 12 T10S R22E 0660 FNL 2238 FEL
	BHL	Sec 12 T10S R22E 0414 FNL 2133 FWL
43-047-51982	NBU 1022-12B4BS	Sec 12 T10S R22E 0684 FNL 2221 FEL
	BHL	Sec 12 T10S R22E 0910 FNL 1807 FEL
43-047-51983	NBU 1022-12B4CS	Sec 12 T10S R22E 0692 FNL 2215 FEL
	BHL	Sec 12 T10S R22E 1241 FNL 1808 FEL
NBU 1022-12P PAD		
43-047-51947	NBU 1022-12P4CS	Sec 12 T10S R22E 1115 FSL 0442 FEL
	BHL	Sec 12 T10S R22E 0246 FSL 0491 FEL
43-047-51962	NBU 1022-12I4CS	Sec 12 T10S R22E 1112 FSL 0451 FEL
	BHL	Sec 12 T10S R22E 1574 FSL 0493 FEL
43-047-51968	NBU 1022-12P1BS	Sec 12 T10S R22E 1109 FSL 0461 FEL
	BHL	Sec 12 T10S R22E 1240 FSL 0489 FEL
43-047-51969	NBU 1022-12P4BS	Sec 12 T10S R22E 1105 FSL 0470 FEL
	BHL	Sec 12 T10S R22E 0580 FSL 0494 FEL
NBU 1022-12P2 PAD		
43-047-51949	NBU 1022-12O1BS	Sec 12 T10S R22E 0877 FSL 1322 FEL
	BHL	Sec 12 T10S R22E 1077 FSL 1818 FEL
43-047-51950	NBU 1022-12O1CS	Sec 12 T10S R22E 0873 FSL 1331 FEL
	BHL	Sec 12 T10S R22E 0761 FSL 1834 FEL
43-047-51953	NBU 1022-12O4BS	Sec 12 T10S R22E 0881 FSL 1313 FEL
	BHL	Sec 12 T10S R22E 0415 FSL 1820 FEL
43-047-51954	NBU 1022-12O4CS	Sec 12 T10S R22E 0885 FSL 1304 FEL
	BHL	Sec 12 T10S R22E 0082 FSL 1828 FEL
NBU 1022-12A PAD		
43-047-51951	NBU 1022-12A1BS	Sec 12 T10S R22E 0598 FNL 0621 FEL
	BHL	Sec 12 T10S R22E 0081 FNL 0481 FEL
43-047-51952	NBU 1022-12A1CS	Sec 12 T10S R22E 0591 FNL 0592 FEL
	BHL	Sec 12 T10S R22E 0414 FNL 0490 FEL

API #	WELL NAME	LOCATION
(Proposed PZ WASATCH-MESA VERDE)		
43-047-51986	NBU 1022-12A4CS	Sec 12 T10S R22E 0596 FNL 0611 FEL
	BHL	Sec 12 T10S R22E 1077 FNL 0491 FEL
43-047-51991	NBU 1022-12A4BS	Sec 12 T10S R22E 0593 FNL 0601 FEL
	BHL	Sec 12 T10S R22E 0746 FNL 0490 FEL
NBU 1022-12I PAD		
43-047-51955	NBU 1022-12J1CS	Sec 12 T10S R22E 2333 FSL 1011 FEL
	BHL	Sec 12 T10S R22E 2071 FSL 1815 FEL
43-047-51957	NBU 1022-12J1BS	Sec 12 T10S R22E 2337 FSL 1002 FEL
	BHL	Sec 12 T10S R22E 2402 FSL 1814 FEL
43-047-51958	NBU 1022-12I4BS	Sec 12 T10S R22E 2341 FSL 0993 FEL
	BHL	Sec 12 T10S R22E 1905 FSL 0493 FEL
43-047-51976	NBU 1022-12I1BS	Sec 12 T10S R22E 2350 FSL 0974 FEL
	BHL	Sec 12 T10S R22E 2568 FSL 0492 FEL
43-047-51978	NBU 1022-12I1CS	Sec 12 T10S R22E 2345 FSL 0984 FEL
	BHL	Sec 12 T10S R22E 2237 FSL 0492 FEL
NBU 1022-12G PAD		
43-047-51963	NBU 1022-12G1CS	Sec 12 T10S R22E 1833 FNL 1721 FEL
	BHL	Sec 12 T10S R22E 1904 FNL 1810 FEL
43-047-51972	NBU 1022-12G4BS	Sec 12 T10S R22E 1841 FNL 1715 FEL
	BHL	Sec 12 T10S R22E 2235 FNL 1812 FEL
43-047-51974	NBU 1022-12G1BS	Sec 12 T10S R22E 1826 FNL 1727 FEL
	BHL	Sec 12 T10S R22E 1572 FNL 1809 FEL
43-047-51977	NBU 1022-12G4CS	Sec 12 T10S R22E 1849 FNL 1709 FEL
	BHL	Sec 12 T10S R22E 2566 FNL 1813 FEL
NBU 1022-12F4 PAD		
43-047-51964	NBU 1022-12F4CS	Sec 12 T10S R22E 2462 FNL 2342 FWL
	BHL	Sec 12 T10S R22E 2401 FNL 2141 FWL
43-047-51965	NBU 1022-12K1BS	Sec 12 T10S R22E 2473 FNL 2359 FWL
	BHL	Sec 12 T10S R22E 2567 FSL 2142 FWL
43-047-51966	NBU 1022-12K1CS	Sec 12 T10S R22E 2479 FNL 2367 FWL
	BHL	Sec 12 T10S R22E 2236 FSL 2144 FWL
43-047-51967	NBU 1022-12E4CS	Sec 12 T10S R22E 2467 FNL 2350 FWL
	BHL	Sec 12 T10S R22E 2565 FNL 0822 FWL
43-047-51970	NBU 1022-12K4BS	Sec 12 T10S R22E 2484 FNL 2375 FWL
	BHL	Sec 12 T10S R22E 1904 FSL 2145 FWL
43-047-51971	NBU 1022-12K4CS	Sec 12 T10S R22E 2490 FNL 2384 FWL
	BHL	Sec 12 T10S R22E 1573 FSL 2146 FWL

API #	WELL NAME	LOCATION
-------	-----------	----------

(Proposed PZ WASATCH-MESA VERDE)

NBU 1022-12CPAD

43-047-51984	NBU 1022-12C4BS	Sec 12 T10S R22E 0827 FNL 2020 FWL
	BHL	Sec 12 T10S R22E 0745 FNL 2134 FWL

43-047-51985	NBU 1022-12C4CS	Sec 12 T10S R22E 0855 FNL 2031 FWL
	BHL	Sec 12 T10S R22E 1076 FNL 2135 FWL

43-047-51987	NBU 1022-12D1CS	Sec 12 T10S R22E 0818 FNL 2016 FWL
	BHL	Sec 12 T10S R22E 0579 FNL 0819 FWL

43-047-51989	NBU 1022-12D1BS	Sec 12 T10S R22E 0809 FNL 2013 FWL
	BHL	Sec 12 T10S R22E 0260 FNL 0823 FWL

43-047-51990	NBU 1022-12D4BS	Sec 12 T10S R22E 0837 FNL 2024 FWL
	BHL	Sec 12 T10S R22E 0910 FNL 0819 FWL

43-047-51992	NBU 1022-12D4CS	Sec 12 T10S R22E 0846 FNL 2027 FWL
	BHL	Sec 12 T10S R22E 1241 FNL 0820 FWL

NBU 1022-12FPAD

43-047-51988	NBU 1022-12E1BS	Sec 12 T10S R22E 1818 FNL 2146 FWL
	BHL	Sec 12 T10S R22E 1572 FNL 0820 FWL

43-047-51993	NBU 1022-12E1CS	Sec 12 T10S R22E 1824 FNL 2154 FWL
	BHL	Sec 12 T10S R22E 1903 FNL 0821 FWL

43-047-51994	NBU 1022-12E4BS	Sec 12 T10S R22E 1835 FNL 2170 FWL
	BHL	Sec 12 T10S R22E 2234 FNL 0821 FWL

43-047-51995	NBU 1022-12F4BS	Sec 12 T10S R22E 1847 FNL 2187 FWL
	BHL	Sec 12 T10S R22E 2070 FNL 2140 FWL

43-047-51996	NBU 1022-12F1BS	Sec 12 T10S R22E 1841 FNL 2179 FWL
	BHL	Sec 12 T10S R22E 1407 FNL 2137 FWL

43-047-51997	NBU 1022-12F1CS	Sec 12 T10S R22E 1830 FNL 2162 FWL
	BHL	Sec 12 T10S R22E 1739 FNL 2138 FWL

Michael L. Coulthard

Digitally signed by Michael L. Coulthard
 DN: cn=Michael L. Coulthard, o=Bureau of Land Management, ou=Branch of Minerals,
 email=Michael_Coulthard@blm.gov, c=US
 Date: 2011.09.19 14:47:24 -06'00'

bcc: File - Natural Buttes Unit
 Division of Oil Gas and Mining
 Central Files
 Agr. Sec. Chron
 Fluid Chron

MCoulthard:mc:9-19-11

RECEIVED: September 20, 2011

From: Diana Mason
To:
Subject: Fwd: Kerr McGee APD approvals

The following APDs have been approved by SITLA including arch and paleo clearance.

NBU 1022-12A1BS (4304751951)
NBU 1022-12A1CS (4304751952)
NBU 1022-12A4CS (4304751986)
)NBU 1022-12A4BS (4304751991)
NBU 1022-12J1CS (4304751955)
NBU 1022-12J1BS (4304751957)
NBU 1022-12I4BS (4304751958)
NBU 1022-12I1BS (4304751976)
NBU 1022-12I1CS (4304751978)
NBU 1022-12B1BS (4304751944)
)NBU 1022-12C1BS (4304751979)
NBU 1022-12B1CS (4304751980)
)NBU 1022-12C1CS (4304751981)
NBU 1022-12B4BS (4304751982)
NBU 1022-12B4CS (4304751983)
)NBU 1022-12H4BS (4304751941)
NBU 1022-12H1CS (4304751942)
NBU 1022-12H1BS (4304751973)
NBU 1022-12H4CS (4304751975)
NBU 1022-12F4CS (4304751964)
NBU 1022-12K1BS (4304751965)
NBU 1022-12K1CS (4304751966)
NBU 1022-12E4CS (4304751967)
NBU 1022-12K4BS (4304751970)
NBU 1022-12K4CS (4304751971)
NBU 1022-12O1BS (4304751949)
NBU 1022-12O1CS (4304751950)
NBU 1022-12O4BS (4304751953)
NBU 1022-12O4CS (4304751954)
NBU 1022-12P4CS (4304751947)
NBU 1022-12I4CS (4304751962)
NBU 1022-12P1BS (4304751968)
NBU 1022-12P4BS (4304751969)
NBU 1022-12G1CS (4304751963)
NBU 1022-12G4BS (4304751972)
NBU 1022-12G1BS (4304751974)
NBU 1022-12G4CS (4304751977)
NBU 1022-12N4BS (4304751943)
NBU 1022-12N4CS (4304751945)
NBU 1022-12J4CS (4304751956)
NBU 1022-12N1BS (4304751959)
NBU 1022-12J4BS (4304751960)
NBU 1022-12N1CS (4304751961)

-Jim Davis

RECEIVED: November 08, 2011

Jim Davis
Utah Trust Lands Administration
jimdavis1@utah.gov
Phone: (801) 538-5156

Well Name	KERR-MCGEE OIL & GAS ONSHORE, L.P. NBU 1022-1211BS			
String	Surf	Prod		
Casing Size(in)	8.625	4.500		
Setting Depth (TVD)	2126	8416		
Previous Shoe Setting Depth (TVD)	40	2126		
Max Mud Weight (ppg)	8.3	12.5		
BOPE Proposed (psi)	500	5000		
Casing Internal Yield (psi)	3390	7780		
Operators Max Anticipated Pressure (psi)	5386	12.3		

Calculations	Surf String	8.625	"	
Max BHP (psi)	.052*Setting Depth*MW=	918		
			BOPE Adequate For Drilling And Setting Casing at Depth?	
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=	663	NO	air drill
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=	450	YES	OK
			*Can Full Expected Pressure Be Held At Previous Shoe?	
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=	459	NO	Reasonable for area
Required Casing/BOPE Test Pressure=		2126	psi	
*Max Pressure Allowed @ Previous Casing Shoe=		40	psi *Assumes 1psi/ft frac gradient	

Calculations	Prod String	4.500	"	
Max BHP (psi)	.052*Setting Depth*MW=	5470		
			BOPE Adequate For Drilling And Setting Casing at Depth?	
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=	4460	YES	
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=	3618	YES	OK
			*Can Full Expected Pressure Be Held At Previous Shoe?	
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=	4086	NO	Reasonable
Required Casing/BOPE Test Pressure=		5000	psi	
*Max Pressure Allowed @ Previous Casing Shoe=		2126	psi *Assumes 1psi/ft frac gradient	

Calculations	String		"	
Max BHP (psi)	.052*Setting Depth*MW=			
			BOPE Adequate For Drilling And Setting Casing at Depth?	
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=		NO	
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=		NO	
			*Can Full Expected Pressure Be Held At Previous Shoe?	
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=		NO	
Required Casing/BOPE Test Pressure=			psi	
*Max Pressure Allowed @ Previous Casing Shoe=			psi *Assumes 1psi/ft frac gradient	

Calculations	String		"	
Max BHP (psi)	.052*Setting Depth*MW=			
			BOPE Adequate For Drilling And Setting Casing at Depth?	
MASP (Gas) (psi)	Max BHP-(0.12*Setting Depth)=		NO	
MASP (Gas/Mud) (psi)	Max BHP-(0.22*Setting Depth)=		NO	
			*Can Full Expected Pressure Be Held At Previous Shoe?	
Pressure At Previous Shoe	Max BHP-.22*(Setting Depth - Previous Shoe Depth)=		NO	
Required Casing/BOPE Test Pressure=			psi	

API Well Number: 43047519760000


*Max Pressure Allowed @ Previous Casing Shoe=

psi *Assumes 1psi/ft frac gradient

RECEIVED: December 12, 2011

43047519760000 NBU 1022-12I1BS

Casing Schematic

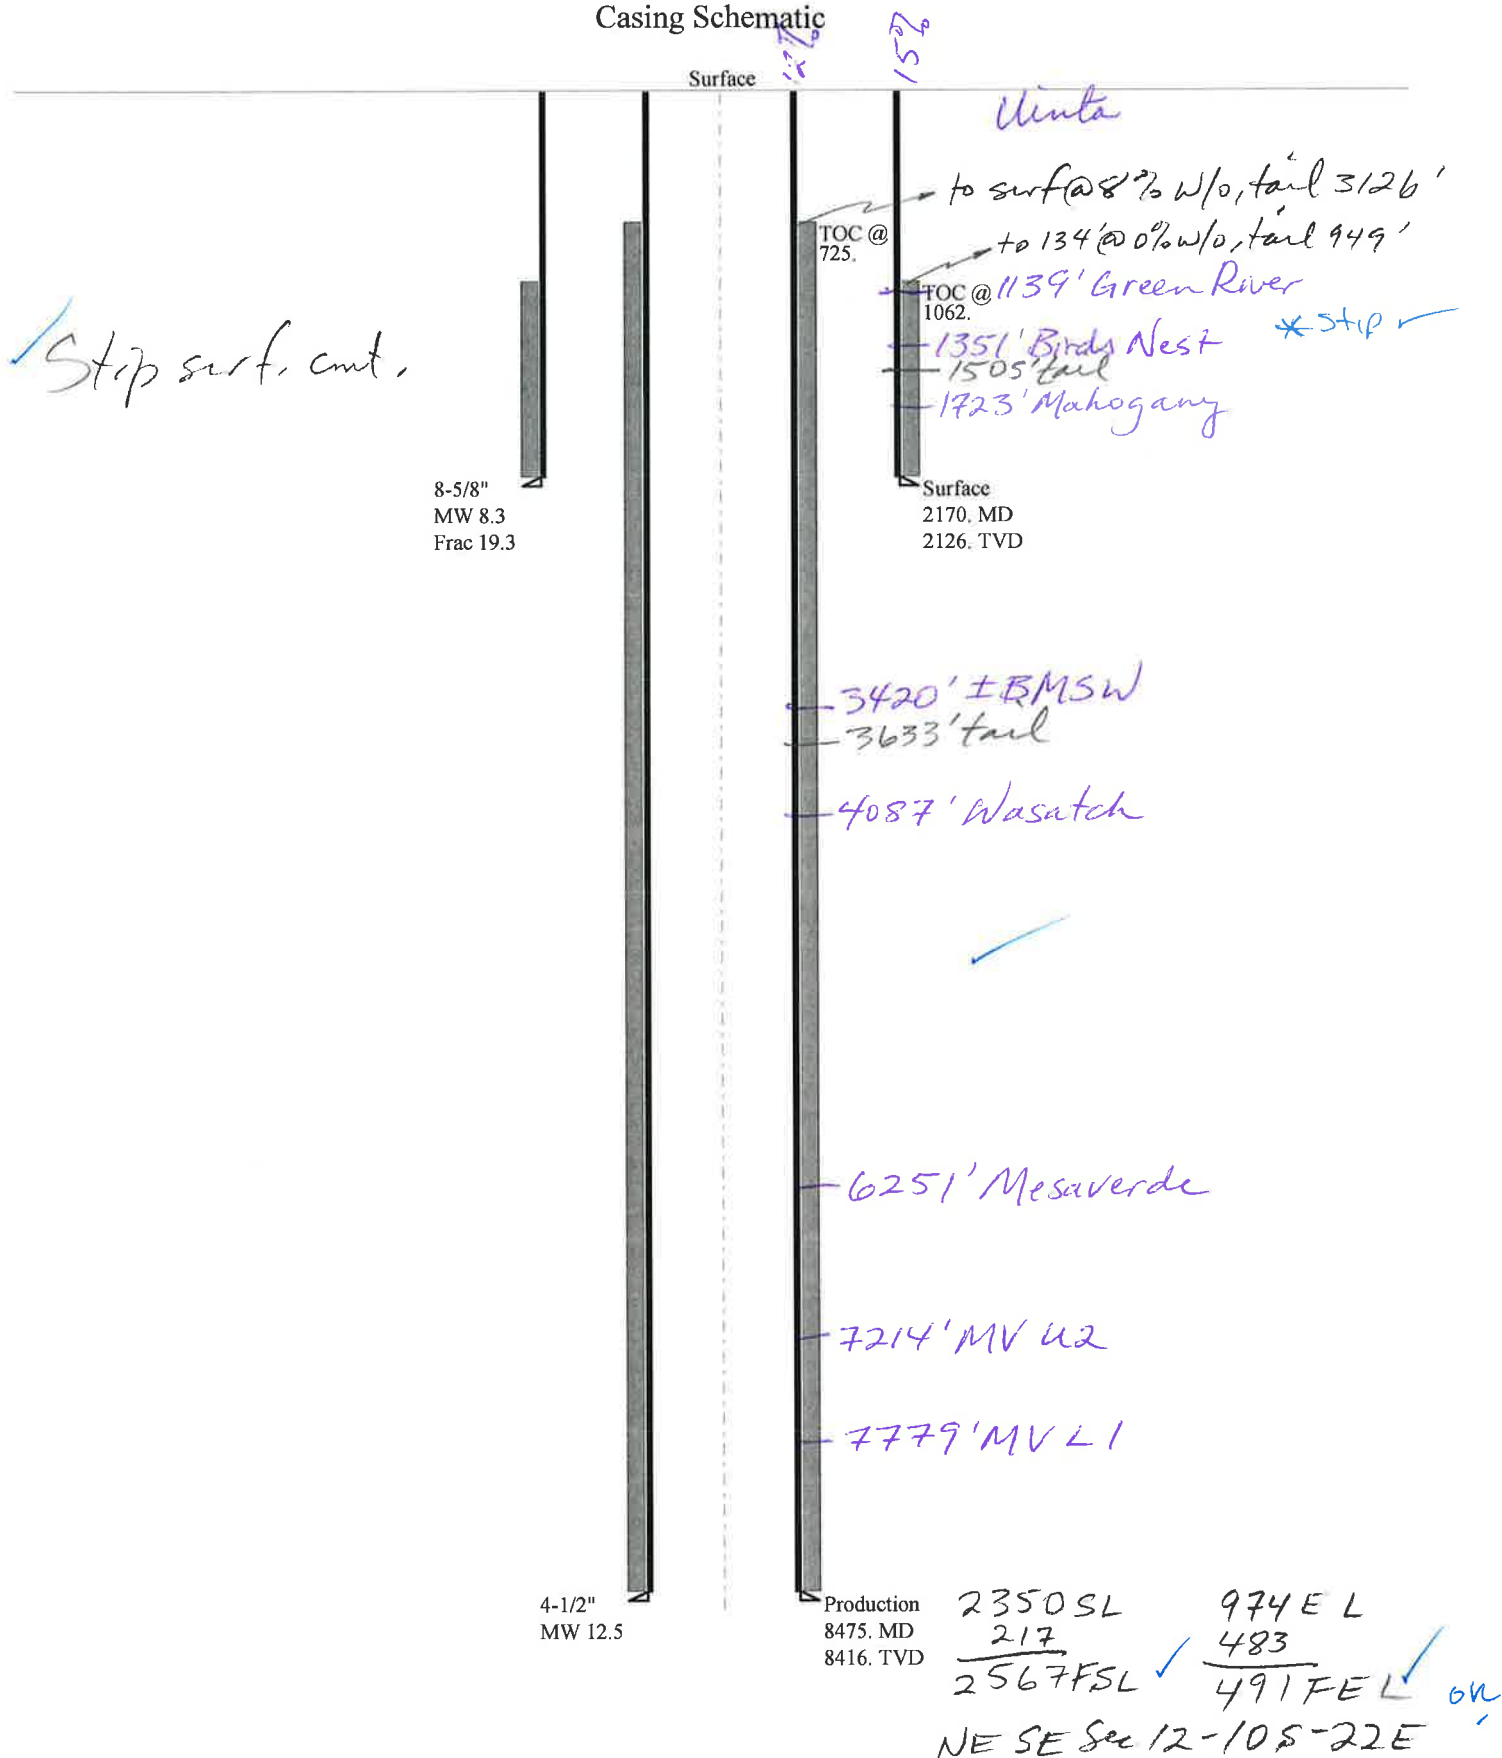

Well name:	43047519760000 NBU 1022-1211BS	
Operator:	KERR-MCGEE OIL & GAS ONSHORE, L.P.	
String type:	Surface	Project ID: 43-047-51976
Location:	UINTAH COUNTY	

Design parameters:**Collapse**

Mud weight: 8.330 ppg
Design is based on evacuated pipe.

Minimum design factors:**Collapse:**

Design factor 1.125

Burst:

Design factor 1.00

Environment:

H2S considered? No
Surface temperature: 74 °F
Bottom hole temperature: 104 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 100 ft

Cement top: 1,062 ft

Burst

Max anticipated surface pressure: 1,910 psi
Internal gradient: 0.120 psi/ft
Calculated BHP 2,165 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)
8 Round LTC: 1.70 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.50 (B)

Tension is based on air weight.
Neutral point: 1,900 ft

Directional Info - Build & Drop

Kick-off point 300 ft
Departure at shoe: 378 ft
Maximum dogleg: 2 °/100ft
Inclination at shoe: 14.5 °

Re subsequent strings:

Next setting depth: 8,475 ft
Next mud weight: 12.500 ppg
Next setting BHP: 5,503 psi
Fracture mud wt: 19.250 ppg
Fracture depth: 2,170 ft
Injection pressure: 2,170 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost (\$)
1	2170	8.625	28.00	I-55	LT&C	2126	2170	7.892	85932

Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (kips)	Tension Strength (kips)	Tension Design Factor
1	920	1880	2.044	2165	3390	1.57	59.5	348	5.85 J

Prepared by: Helen Sadik-Macdonald
Div of Oil, Gas & Mining

Phone: 801 538-5357
FAX: 801-359-3940

Date: December 1, 2011
Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 2126 ft, a mud weight of 8.33 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Collapse strength is (biaxially) derated for doglegs in directional wells by multiplying the tensile stress by the cross section area to calculate a

Engineering responsibility for use of this design will be that of the purchaser.

Well name:	43047519760000 NBU 1022-1211BS		
Operator:	KERR-MCGEE OIL & GAS ONSHORE, L.P.		
String type:	Production	Project ID:	43-047-51976
Location:	UINTAH COUNTY		

Design parameters:**Collapse**

Mud weight: 12.500 ppg
Design is based on evacuated pipe.

Minimum design factors:**Collapse:**

Design factor 1.125

Burst:

Design factor 1.00

Environment:

H2S considered? No
Surface temperature: 74 °F
Bottom hole temperature: 192 °F
Temperature gradient: 1.40 °F/100ft
Minimum section length: 100 ft

Cement top: 725 ft

Burst

Max anticipated surface pressure: 3,613 psi
Internal gradient: 0.220 psi/ft
Calculated BHP 5,465 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)
8 Round LTC: 1.80 (J)
Buttress: 1.60 (J)
Premium: 1.50 (J)
Body yield: 1.60 (B)

Tension is based on air weight.
Neutral point: 6,902 ft

Directional Info - Build & Drop

Kick-off point 300 ft
Departure at shoe: 529 ft
Maximum dogleg: 2 °/100ft
Inclination at shoe: 0 °

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Est. Cost (\$)
1	8475	4.5	11.60	I-80	LT&C	8416	8475	3.875	111870
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (kips)	Tension Strength (kips)	Tension Design Factor
1	5465	6360	1.164	5465	7780	1.42	97.6	212	2.17 J

Prepared by: Helen Sadik-Macdonald
Div of Oil, Gas & Mining

Phone: 801 538-5357
FAX: 801-359-3940

Date: December 1, 2011
Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 8416 ft, a mud weight of 12.5 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Collapse strength is (biaxially) derated for doglegs in directional wells by multiplying the tensile stress by the cross section area to calculate a

Engineering responsibility for use of this design will be that of the purchaser.

ON-SITE PREDRILL EVALUATION

Utah Division of Oil, Gas and Mining

Operator	KERR-MCGEE OIL & GAS ONSHORE, L.P.				
Well Name	NBU 1022-12I1BS				
API Number	43047519760000	APD No	4606	Field/Unit	NATURAL BUTTES
Location: 1/4,1/4	NESE	Sec	12	Tw	10.0S
		Rng	22.0E		2350
GPS Coord (UTM)	638218	4424655		Surface Owner	FSL 974 FEL

Participants

Andy Lytle, Sheila Wopsock, Charles Chase, Grizz Oleen, Jaime Scharnowski, Doyle Holmes, (Kerr McGee). John Slaugh, Mitch Batty, (Timberline). Jim Davis (SITLA). Ben Williams (DWR). David Hackford, (DOGM).

Regional/Local Setting & Topography

The general area is in the southeast portion of the Natural Buttes Unit. Within this area is the White River and rugged drainages that drain into it. Topography is varied and frequently dissected by short draws or washes, which become overly steep as they approach the White River breaks or rim. Distance to the White River is 3900'. The side drainages are dry except for ephemeral flows. No seeps or springs exist in the area. An occasional pond has been constructed to supply water for livestock and antelope. Vernal, Utah is approximately 47.9 miles to the northwest. Access from Vernal is by following Utah State, Uintah County and oilfield development roads. Four wells, in addition to this one will be directionally drilled from this pad. (For a total of five new wells). There is one existing well on this pad. (The NBU 1022-12I). At this time, the decision rather to PA or TA this well has not been made. This proposed location takes in an existing location, and very little new construction will be necessary except for digging the reserve pit. The existing access road will be adequate. The location runs in an east-west direction along the top of a flat topped ridge. This ridge breaks off sharply into rugged secondary canyons on the north, south and west sides. New construction will consist of approx. 50 feet on all sides of the existing pad, and an additional 50 feet on the north side for reserve pit and excess cut stockpile. No drainage concerns exist, and no diversions will be needed. The pad as modified should be stable and should be a suitable location for six wells, and is on the best site available in the immediate area.

Surface Use Plan

Current Surface Use

Grazing
Wildlife Habitat
Existing Well Pad

New Road Miles	Well Pad	Src Const Material	Surface Formation
0	Width 332 Length 415	Onsite	UNTA

Ancillary Facilities N

Waste Management Plan Adequate? Y

Environmental Parameters

Affected Floodplains and/or Wetlands N

Flora / Fauna

Prickly pear, wild onion, shadscale, mat saltbrush, Indian ricegrass, halogeton, pepper grass, annuals and curly Vegetation is a salt desert shrub type. Principal species present are cheatgrass, black sagebrush, stipa, mesquite grass.

Sheep, antelope, coyote, raptors, small mammals and birds.

Soil Type and Characteristics

Rocky sandy clay loam.

Erosion Issues N

Sedimentation Issues N

Site Stability Issues Y

West side of reserve pit will be 3.4 feet of fill. This fill shall be compacted during location construction.

Drainage Diversion Required? N

Berm Required? N

Erosion Sedimentation Control Required? N

Paleo Survey Run? Y **Paleo Potential Observed?** N **Cultural Survey Run?** Y **Cultural Resources?** N

Reserve Pit

Site-Specific Factors

Site Ranking

Distance to Groundwater (feet)	100 to 200	5
Distance to Surface Water (feet)	>1000	0
Dist. Nearest Municipal Well (ft)	>5280	0
Distance to Other Wells (feet)		20
Native Soil Type	High permeability	20
Fluid Type	Fresh Water	5
Drill Cuttings	Normal Rock	0
Annual Precipitation (inches)		0
Affected Populations		
Presence Nearby Utility Conduits	Not Present	0
Final Score	50	1 Sensitivity Level

Characteristics / Requirements

The reserve pit is planned in an area of cut (except for the northwest corner of pit which will be in 3.4 feet of fill) on the north side of the location. Dimensions are 120' x 220' x 12' deep with 2' of freeboard. Kerr McGee agreed to line this pit with a 16 mil synthetic liner and a layer of felt sub-liner.

Closed Loop Mud Required? N **Liner Required?** Y **Liner Thickness** 16 **Pit Underlayment Required?** Y

Other Observations / Comments

David Hackford
Evaluator

10/12/2011
Date / Time

Application for Permit to Drill

Statement of Basis

12/19/2011

Utah Division of Oil, Gas and Mining

Page 1

APD No	API WellNo	Status	Well Type	Surf Owner	CBM
4606	43047519760000	SITLA	GW	S	No
Operator	KERR-MCGEE OIL & GAS ONSHORE, L.P.		Surface Owner-APD		
Well Name	NBU 1022-12I1BS		Unit	NATURAL BUTTES	
Field	NATURAL BUTTES		Type of Work	DRILL	
Location	NESE 12 10S 22E S 2350 FSL 974 FEL GPS Coord (UTM) 638156E 4424863N				

Geologic Statement of Basis

Kerr McGee proposes to set 2,170' of surface casing at this location. The depth to the base of the moderately saline water at this location is estimated to be at a depth of 3,420'. A search of Division of Water Rights records shows no water wells within a 10,000 foot radius of the center of Section 12. The surface formation at this site is the Uinta Formation. The Uinta Formation is made up of interbedded shales and sandstones. The sandstones are mostly lenticular and discontinuous and should not be a significant source of useable ground water. Production casing cement should be brought up above the base of the moderately saline ground water to isolate it from fresher waters uphole.

Brad Hill
APD Evaluator

11/2/2011
Date / Time

Surface Statement of Basis

The general area is in the southeast portion of the Natural Buttes Unit. Within this area is the White River and rugged drainages that drain into it. Topography is varied and frequently dissected by short draws or washes, which become overly steep as they approach the White River breaks or rim. Distance to the White River is 3900'. The side drainages are dry except for ephemeral flows. No seeps or springs exist in the area. An occasional pond has been constructed to supply water for livestock and antelope. Vernal, Utah is approximately 48 miles to the northwest. Access from Vernal is by following Utah State, Uintah County and oilfield development roads. The existing access road will be adequate.

Five wells will be directionally drilled from this location. They are the NBU 1022-12I1BS, NBU 1022-12I1CS, NBU 1022-12I4BS, NBU 1022-12J1BS and the NBU 1022-12J1CS. The existing location has one well. This well is the NBU 1022-12I, and at this time the decision rather to PA or TA this well has not been made. The location is on a flat topped ridge that runs in a northeast-southwest direction. This ridge breaks off sharply into rugged secondary canyons on the north, south and west sides. No drainage concerns exist, and no diversions will be needed. The pad as modified should be stable and sufficient for six wells, and is the best site for a location in the immediate area.

New construction will consist of approx. 50 feet on all sides of the existing pad, and an additional 50 feet on the north side for reserve pit and excess cut stockpile.

Both the surface and minerals are owned by SITLA. Jim Davis of SITLA and Ben Williams with DWR were invited by email to the pre-site evaluation. Both were present. Kerr McGee personnel were told to consult with SITLA for reclamation standards including seeding mixes to be used.

David Hackford
Onsite Evaluator

10/12/2011
Date / Time

Conditions of Approval / Application for Permit to Drill

Category	Condition
----------	-----------

RECEIVED: December 19, 2011

Application for Permit to Drill Statement of Basis

12/19/2011

Utah Division of Oil, Gas and Mining

Page 2

	Excess material must be stockpiled just beyond the northwest corner of the reserve pit which is in 3.4' of fill.
Pits	A synthetic liner with a minimum thickness of 16 mils with a felt subliner shall be properly installed and maintained in the reserve pit.
Pits	The reserve pit should be located on the north side of the location.
Surface	The well site shall be bermed to prevent fluids from leaving the pad.

WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 9/13/2011**API NO. ASSIGNED:** 43047519760000**WELL NAME:** NBU 1022-12I1BS**OPERATOR:** KERR-MCGEE OIL & GAS ONSHORE, L.P. (N2995)**PHONE NUMBER:** 720 929-6086**CONTACT:** Gina Becker**PROPOSED LOCATION:** NESE 12 100S 220E**Permit Tech Review:** ☒**SURFACE:** 2350 FSL 0974 FEL**Engineering Review:** ☒**BOTTOM:** 2568 FSL 0492 FEL**Geology Review:** ☒**COUNTY:** UINTAH**LATITUDE:** 39.96264**LONGITUDE:** -109.38240**UTM SURF EASTINGS:** 638156.00**NORTHINGS:** 4424863.00**FIELD NAME:** NATURAL BUTTES**LEASE TYPE:** 3 - State**LEASE NUMBER:** UT ST UO 01997-A ST**PROPOSED PRODUCING FORMATION(S):** WASATCH-MESA VERDE**SURFACE OWNER:** 3 - State**COALBED METHANE:** NO**RECEIVED AND/OR REVIEWED:**☒ **PLAT**☒ **Bond:** STATE/FEE - 22013542☐ **Potash**☒ **Oil Shale 190-5**☐ **Oil Shale 190-3**☐ **Oil Shale 190-13**☒ **Water Permit:** 43-8496☐ **RDCC Review:**☐ **Fee Surface Agreement**☒ **Intent to Commingle****Commingle Approved****LOCATION AND SITING:**☐ **R649-2-3.****Unit:** NATURAL BUTTES☐ **R649-3-2. General**☐ **R649-3-3. Exception**☒ **Drilling Unit****Board Cause No:** Cause 173-14**Effective Date:** 12/2/1999**Siting:** Suspends General Siting☒ **R649-3-11. Directional Drill****Comments:** Presite Completed

Stipulations: 3 - Commingle - ddoucet
5 - Statement of Basis - bhill
15 - Directional - dmason
17 - Oil Shale 190-5(b) - dmason
25 - Surface Casing - hmadonald

RECEIVED: December 19, 2011



GARY R. HERBERT
Governor

GREGORY S. BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: NBU 1022-12I1BS

API Well Number: 43047519760000

Lease Number: UT ST UO 01997-A ST

Surface Owner: STATE

Approval Date: 12/19/2011

Issued to:

KERR-MCGEE OIL & GAS ONSHORE, L.P., P.O. Box 173779, Denver, CO 80217

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 173-14. The expected producing formation or pool is the WASATCH-MESA VERDE Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

Commingling:

In accordance with Board Cause No. 173-14, commingling of the production from the Wasatch formation and the Mesaverde formation in this well is allowed.

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

In accordance with the Order in Cause No. 190-5(b) dated October 28, 1982, the operator shall comply with the requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operators shall ensure that the surface and or production casing is properly cemented over the entire oil shale section as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the division.

Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis (copy attached).

Surface casing shall be cemented to the surface.

Additional Approvals:

The operator is required to obtain approval from the Division of Oil, Gas and mining before performing any of the following actions during the drilling of this well:

- Any changes to the approved drilling plan – contact Dustin Doucet
- Significant plug back of the well – contact Dustin Doucet
- Plug and abandonment of the well – contact Dustin Doucet

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well – contact Carol Daniels
OR
submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at <http://oilgas.ogm.utah.gov>
- 24 hours prior to testing blowout prevention equipment - contact Dan Jarvis
- 24 hours prior to cementing or testing casing – contact Dan Jarvis
- Within 24 hours of making any emergency changes to the approved drilling program – contact Dustin Doucet
- 24 hours prior to commencing operations to plug and abandon the well – contact Dan Jarvis

Contact Information:

The following are Division of Oil, Gas and Mining contacts and their telephone numbers (please leave a voicemail message if the person is not available to take the call):

- Carol Daniels 801-538-5284 - office
- Dustin Doucet 801-538-5281 - office
801-733-0983 - after office hours
- Dan Jarvis 801-538-5338 - office
801-231-8956 - after office hours

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

Approved By:



For John Rogers
Associate Director, Oil & Gas

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER:

UT ST UO 01197-A ST

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:

UTU63047A

1. TYPE OF WELL

OIL WELL ☐

GAS WELL ☒

OTHER _____

8. WELL NAME and NUMBER:

Multiple Well Locations

2. NAME OF OPERATOR:

Kerr-McGee Oil & Gas Onshore, L.P.

9. API NUMBER:

3. ADDRESS OF OPERATOR:

P.O. Box 173779

Denver

CO

80217

PHONE NUMBER:

(720) 929-6086

10. FIELD AND POOL, OR WILDCAT

Natural Buttes

4. LOCATION OF WELL

FOOTAGES AT SURFACE: Various Locations in T10S-R22E, Section 12

COUNTY: Uintah

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:

12 10S 22E 6

STATE:

UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: <u>4/23/2012</u>	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Lease Number</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	<u>Correction</u>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Kerr-McGee is requesting approval to correct the lease number from UT ST UO 01997-A ST to UT ST UO 01197-A ST for various well locations. Please see attached well list.

Thank you!

NAME (PLEASE PRINT) Gina T Becker

TITLE Senior Regulatory Analyst

SIGNATURE 

DATE 4/23/2012


(This space for State use only)

RECEIVED

APR 24 2012

	API UWI NO	WELL NAME	SL STATE	SL SECTION	SL TOWNSHIP	SL RANGE	SL COUNTY NAME	GOV LEASE NO	FEDERAL LEASE NO
1	4304751951	NBU 1022-12A1BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
2	4304751952	NBU 1022-12A1CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
3	4304751991	NBU 1022-12A4BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
4	4304751986	NBU 1022-12A4CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
5	4304751944	NBU 1022-12B1BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
6	4304751980	NBU 1022-12B1CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
7	4304751982	NBU 1022-12B4BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
8	4304751983	NBU 1022-12B4CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
9	4304751979	NBU 1022-12C1BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
10	4304751981	NBU 1022-12C1CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
11	4304751984	NBU 1022-12C4BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
12	4304751985	NBU 1022-12C4CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
13	4304751989	NBU 1022-12D1BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
14	4304751987	NBU 1022-12D1CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
15	4304751990	NBU 1022-12D4BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
16	4304751992	NBU 1022-12D4CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
17	4304751988	NBU 1022-12E1BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
18	4304751993	NBU 1022-12E1CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
19	4304751994	NBU 1022-12E4BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
20	4304751996	NBU 1022-12F1BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
21	4304751997	NBU 1022-12F1CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
22	4304751995	NBU 1022-12F4BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
23	4304751967	NBU 1022-12E4CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
24	4304751964	NBU 1022-12F4CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
25	4304751965	NBU 1022-12K1BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
26	4304751966	NBU 1022-12K1CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
27	4304751970	NBU 1022-12K4BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
28	4304751971	NBU 1022-12K4CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
29	4304751974	NBU 1022-12G1BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
30	4304751963	NBU 1022-12G1CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
31	4304751972	NBU 1022-12G4BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
32	4304751977	NBU 1022-12G4CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
33	4304751973	NBU 1022-12H1BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
34	4304751942	NBU 1022-12H1CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
35	4304751941	NBU 1022-12H4BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
36	4304751975	NBU 1022-12H4CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
37	4304751976	NBU 1022-12I1BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
38	4304751978	NBU 1022-12I1CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
39	4304751958	NBU 1022-12I4BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
40	4304751957	NBU 1022-12J1BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
41	4304751955	NBU 1022-12J1CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
42	4304751960	NBU 1022-12J4BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
43	4304751956	NBU 1022-12J4CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
44	4304751959	NBU 1022-12N1BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
45	4304751961	NBU 1022-12N1CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
46	4304751943	NBU 1022-12N4BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
47	4304751945	NBU 1022-12N4CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
48	4304751962	NBU 1022-12I4CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
49	4304751968	NBU 1022-12P1BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A

	API UWI NO	WELL NAME	SL STATE	SL SECTION	SL TOWNSHIP	SL RANGE	SL COUNTY NAME	GOV LEASE NO	FEDERAL LEASE NO
50	4304751969	NBU 1022-12P4BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
51	4304751947	NBU 1022-12P4CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
52	4304751949	NBU 1022-12O1BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
53	4304751950	NBU 1022-12O1CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
54	4304751953	NBU 1022-12O4BS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A
55	4304751954	NBU 1022-12O4CS	UT	12	10	22	UINTAH	UT ST UO 01197-A ST	UTU63047A

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UT ST UO 01197-
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 1022-1211BS
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2350 FSL 0974 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESE Section: 12 Township: 10.0S Range: 22.0E Meridian: S		9. API NUMBER: 43047519760000
5. FIELD and POOL or WILDCAT: NATURAL BUTTES		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: UINTAH		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 5/15/2012 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </div> <div style="width: 33%;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input checked="" type="checkbox"/> OTHER </div> <div style="width: 33%;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION </div> </div>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. Kerr-McGee Oil & Gas Onshore, LP is requesting to refurb the existing pit on this multi-well pad for completion operations. The refurb pit will be relined per the requirements in the COA of the APD. Upon completion of the wells on this pad, Kerr-McGee is also requesting to utilize this pit as an ACTS staging pit to be utilized for other completion operations in the area. The trucks will unload water into these tanks before the water is placed into the refurbished pit. The purpose of the frac tanks is to collect any hydro-carbons that may have been associated with the other completion operations before releasing into the pit. We plan to keep this pit open for 1 year. During this time the surrounding well location completion fluids will be recycled in this pit and utilized for other frac jobs in the surrounding sections. Thank you.		
NAME (PLEASE PRINT) Gina Becker		PHONE NUMBER 720 929-6086
SIGNATURE N/A		TITLE Regulatory Analyst II
DATE 5/14/2012		DATE: May 29, 2012 By: 



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Sundry Conditions of Approval Well Number 43047519760000

A synthetic liner with a minimum thickness of 30 mils with a felt subliner shall be properly installed and maintained in the pit.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UT ST UO 01197-
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 1022-121BS
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2350 FSL 0974 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESE Section: 12 Township: 10.0S Range: 22.0E Meridian: S		9. API NUMBER: 43047519760000
5. FIELD and POOL or WILDCAT: NATURAL BUTTES		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: UINTAH		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 12/19/2012 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </div> <div style="width: 33%;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </div> <div style="width: 33%;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/> </div> </div>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. Kerr-McGee Oil & Gas Onshore, L.P. (Kerr-McGee) respectfully requests an extension to this APD for the maximum time allowed. Please contact the undersigned with any questions and/or comments. Thank you.		
NAME (PLEASE PRINT) Luke Urban		PHONE NUMBER 720 929-6501
SIGNATURE N/A		TITLE Regulatory Specialist
DATE 12/11/2012		APPROVED BY: <div style="text-align: center;"> Approved by the Utah Division of Oil, Gas and Mining Date: December 12, 2012 By: </div>



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047519760000

API: 43047519760000

Well Name: NBU 1022-12I1BS

Location: 2350 FSL 0974 FEL QTR NESE SEC 12 TWNP 100S RNG 220E MER S

Company Permit Issued to: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date Original Permit Issued: 12/19/2011

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☒ Yes ☐ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Luke Urban

Date: 12/11/2012

Title: Regulatory Specialist Representing: KERR-MCGEE OIL & GAS ONSHORE, L.P.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UT ST UO 01197-
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 1022-1211BS
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2350 FSL 0974 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESE Section: 12 Township: 10.0S Range: 22.0E Meridian: S		9. API NUMBER: 43047519760000
PHONE NUMBER: 720 929-6511		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: UINTAH		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> ALTER CASING	
<input checked="" type="checkbox"/> SPUD REPORT Date of Spud: 2/19/2013	<input type="checkbox"/> CASING REPAIR	
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	
	<input type="checkbox"/> CHANGE WELL STATUS	
	<input type="checkbox"/> CHANGE TUBING	
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	
	<input type="checkbox"/> CONVERT WELL TYPE	
	<input type="checkbox"/> DEEPEN	
	<input type="checkbox"/> FRACTURE TREAT	
	<input type="checkbox"/> NEW CONSTRUCTION	
	<input type="checkbox"/> OPERATOR CHANGE	
	<input type="checkbox"/> PLUG AND ABANDON	
	<input type="checkbox"/> PLUG BACK	
	<input type="checkbox"/> PRODUCTION START OR RESUME	
	<input type="checkbox"/> RECLAMATION OF WELL SITE	
	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION	
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	
	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	
	<input type="checkbox"/> TEMPORARY ABANDON	
	<input type="checkbox"/> TUBING REPAIR	
	<input type="checkbox"/> VENT OR FLARE	
	<input type="checkbox"/> WATER DISPOSAL	
	<input type="checkbox"/> WATER SHUTOFF	
	<input type="checkbox"/> SI TA STATUS EXTENSION	
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	
	<input type="checkbox"/> OTHER: <input style="width: 100px;" type="text"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. MIRU TRIPLE A BUCKET RIG. DRILLED 20" CONDUCTOR HOLE TO 40'. RAN 14" 36.7# SCHEDULE 10 CONDUCTOR PIPE. CEMENT WITH 28 SACKS READY MIX. SPUD WELL LOCATION ON February 15, 2013 AT 17:00 HRS.		
Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY February 20, 2013		
NAME (PLEASE PRINT) Lindsey Frazier	PHONE NUMBER 720 929-6857	TITLE Regulatory Analyst II
SIGNATURE N/A	DATE 2/19/2013	

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: KERR McGEE OIL & GAS ONSHORE LP Operator Account Number: N 2995
Address: P.O. Box 173779
city DENVER
state CO zip 80217 Phone Number: (720) 929-6857

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304751955	NBU 1022-12J1CS		NESE	12	10S	22E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
B	99999	2900	2/15/2013			2/28/2013	
Comments: MIRU TRIPLE A BUCKET RIG. SPUD WELL LOCATION ON February 15, 2013 AT 08:30 HRS.							

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304751958	NBU 1022-12I4BS		NESE	12	10S	22E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
B	99999	2900	2/15/2013			2/28/2013	
Comments: MIRU TRIPLE A BUCKET RIG. SPUD WELL LOCATION ON February 15, 2013 AT 14:00 HRS.							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
4304751976	NBU 1022-12I1BS		NESE	12	10S	22E	UINTAH
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
B	99999	2900	2/15/2013			2/28/2013	
Comments: MIRU TRIPLE A BUCKET RIG. SPUD WELL LOCATION ON February 15, 2013 AT 17:00 HRS.							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

RECEIVED
FEB 19 2013

Lindsey Frazier

Name (Please Print)

Signature

REGULATORY ANALYST II

Title

2/19/2013

Date

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UT ST UO 01197-
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 1022-121BS
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2350 FSL 0974 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESE Section: 12 Township: 10.0S Range: 22.0E Meridian: S		9. API NUMBER: 43047519760000
PHONE NUMBER: 720 929-6514		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: UINTAH		STATE: UTAH

11.

CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 3/14/2013	<input type="checkbox"/> ACIDIZE <input checked="" type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The operator requests approval for changes in the drilling plan. Specifically, the operator requests approval for a FIT wavier, closed loop drilling option, and a production casing change. The production casing change includes a switch from 4.5 inch I-80 11.6 BTC/LTC casing to 4.5 inch I-80 11.6 LB Ultra DQX/LTC casing. All other aspects of the previously approved drilling plan will not change. Please see closed loop attachment.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: March 14, 2013

By: *Derek Duff*

NAME (PLEASE PRINT) Lindsey Frazier	PHONE NUMBER 720 929-6857	TITLE Regulatory Analyst II
SIGNATURE N/A		DATE 3/14/2013

Requested Drilling Options:

Kerr-McGee will use either a closed loop drilling system that will require one pit and one cuttings storage area to be constructed on the drilling pad or a traditional drilling operation with one pit used for drilling and completion operations. The cuttings storage area will be used to contain only the de-watered drill cuttings and will be lined and bermed to prevent any liquid runoff. The drill cuttings will be buried in the completion pit once completion operations are completed according to traditional pit closure standards. The pit will be constructed to allow for completion operations. The completion operations pit will be lined with a synthetic material 20 mil or thicker and will be used for the completing of the wells on the pad or used as part of our Aandarko Completions Transportation System (ACTS). Using the closed loop drilling system will allow Kerr-McGee to decrease the amount of disturbance/footprint on location compared to a single large drilling/completions pit.

If Kerr-McGee does not use a closed loop drilling system, it will construct a traditional drilling/completions pit to contain drill cuttings and for use in completion operations. The pit will be lined with a synthetic material 20 mil or thicker. The drill cuttings will be buried in the pit using traditional pit closure standards.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UT ST UO 01197-
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 1022-121BS
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2350 FSL 0974 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESE Section: 12 Township: 10.0S Range: 22.0E Meridian: S		9. API NUMBER: 43047519760000
PHONE NUMBER: 720 929-6511		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: UINTAH		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> ALTER CASING	
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CASING REPAIR	
<input checked="" type="checkbox"/> DRILLING REPORT Report Date: 6/4/2013	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	
	<input type="checkbox"/> CHANGE TUBING	
	<input type="checkbox"/> CHANGE WELL STATUS	
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	
	<input type="checkbox"/> CONVERT WELL TYPE	
	<input type="checkbox"/> DEEPEN	
	<input type="checkbox"/> FRACTURE TREAT	
	<input type="checkbox"/> NEW CONSTRUCTION	
	<input type="checkbox"/> OPERATOR CHANGE	
	<input type="checkbox"/> PLUG AND ABANDON	
	<input type="checkbox"/> PLUG BACK	
	<input type="checkbox"/> PRODUCTION START OR RESUME	
	<input type="checkbox"/> RECLAMATION OF WELL SITE	
	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION	
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	
	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	
	<input type="checkbox"/> TEMPORARY ABANDON	
	<input type="checkbox"/> TUBING REPAIR	
	<input type="checkbox"/> VENT OR FLARE	
	<input type="checkbox"/> WATER DISPOSAL	
	<input type="checkbox"/> WATER SHUTOFF	
	<input type="checkbox"/> SI TA STATUS EXTENSION	
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	
	<input type="checkbox"/> OTHER: <input style="width: 100px;" type="text"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. <div style="text-align: center; margin-top: 20px;"> Drilled to 2,354 ft. in May 2013. </div> <div style="text-align: right; margin-top: 20px;"> Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY June 06, 2013 </div>		
NAME (PLEASE PRINT) Teena Paulo	PHONE NUMBER 720 929-6236	TITLE Staff Regulatory Specialist
SIGNATURE N/A	DATE 6/4/2013	

State of Utah - Notification Form

Operator Anadarko Petroleum Rig Name/# PIONEER 54
Submitted By KENNY MORRIS Phone Number 435-790-2921
Well Name/Number NBU 1022-12I1BS
Qtr/Qtr NE/NE Section 12 Township 10S Range 22E
Lease Serial Number UT ST UO 01997-A ST
API Number 4304751976

Casing – Time casing run starts, not cementing times.

- ☐ Production Casing
☐ Other

Date/Time _____ 0 AM ☐ PM ☐

BOPE

- ☐ Initial BOPE test at surface casing point
☐ Other

Date/Time 6/13/2013 10 AM ☐ PM ☐

Rig Move

Location To: NBU 1022-12I PAD

Date/Time ____ _ AM ☐ PM ☐


Remarks 5TH WELL OF 5 ON THE NBU 1022-12I PAD

RECEIVED
JUN 13 2013
DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UT ST UO 01197-
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 1022-121BS
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2350 FSL 0974 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESE Section: 12 Township: 10.0S Range: 22.0E Meridian: S		9. API NUMBER: 43047519760000
5. FIELD and POOL or WILDCAT: NATURAL BUTTES		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: UINTAH		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> ALTER CASING	
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CASING REPAIR	
<input checked="" type="checkbox"/> DRILLING REPORT Report Date: 7/1/2013	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	
	<input type="checkbox"/> CHANGE TUBING	
	<input type="checkbox"/> CHANGE WELL STATUS	
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	
	<input type="checkbox"/> CONVERT WELL TYPE	
	<input type="checkbox"/> DEEPEN	
	<input type="checkbox"/> FRACTURE TREAT	
	<input type="checkbox"/> NEW CONSTRUCTION	
	<input type="checkbox"/> OPERATOR CHANGE	
	<input type="checkbox"/> PLUG AND ABANDON	
	<input type="checkbox"/> PLUG BACK	
	<input type="checkbox"/> PRODUCTION START OR RESUME	
	<input type="checkbox"/> RECLAMATION OF WELL SITE	
	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION	
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	
	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	
	<input type="checkbox"/> TEMPORARY ABANDON	
	<input type="checkbox"/> TUBING REPAIR	
	<input type="checkbox"/> VENT OR FLARE	
	<input type="checkbox"/> WATER DISPOSAL	
	<input type="checkbox"/> WATER SHUTOFF	
	<input type="checkbox"/> SI TA STATUS EXTENSION	
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	
	<input type="checkbox"/> OTHER	
	OTHER: <input style="width: 100px;" type="text"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. Drilled to 8,486 ft. in June 2013.		
Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY July 10, 2013		
NAME (PLEASE PRINT) Teena Paulo	PHONE NUMBER 720 929-6236	TITLE Staff Regulatory Specialist
SIGNATURE N/A	DATE 7/1/2013	

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UT ST UO 01197-
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 1022-121BS
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2350 FSL 0974 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESE Section: 12 Township: 10.0S Range: 22.0E Meridian: S		9. API NUMBER: 43047519760000
10. FIELD and POOL or WILDCAT: NATURAL BUTTES		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: UINTAH		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> ALTER CASING	
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CASING REPAIR	
<input checked="" type="checkbox"/> DRILLING REPORT Report Date: 8/5/2013	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	
	<input type="checkbox"/> CHANGE TUBING	
	<input type="checkbox"/> CHANGE WELL STATUS	
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	
	<input type="checkbox"/> CONVERT WELL TYPE	
	<input type="checkbox"/> DEEPEN	
	<input type="checkbox"/> FRACTURE TREAT	
	<input type="checkbox"/> NEW CONSTRUCTION	
	<input type="checkbox"/> OPERATOR CHANGE	
	<input type="checkbox"/> PLUG AND ABANDON	
	<input type="checkbox"/> PLUG BACK	
	<input type="checkbox"/> PRODUCTION START OR RESUME	
	<input type="checkbox"/> RECLAMATION OF WELL SITE	
	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION	
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	
	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	
	<input type="checkbox"/> TEMPORARY ABANDON	
	<input type="checkbox"/> TUBING REPAIR	
	<input type="checkbox"/> VENT OR FLARE	
	<input type="checkbox"/> WATER DISPOSAL	
	<input type="checkbox"/> WATER SHUTOFF	
	<input type="checkbox"/> SI TA STATUS EXTENSION	
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	
	<input type="checkbox"/> OTHER: <input style="width: 100px;" type="text"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. Started completing the well. Well TD at 8,486 ft.		
Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY August 05, 2013		
NAME (PLEASE PRINT) Teena Paulo	PHONE NUMBER 720 929-6236	TITLE Staff Regulatory Specialist
SIGNATURE N/A	DATE 8/5/2013	

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UT ST UO 01197-
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 1022-121BS
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2350 FSL 0974 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESE Section: 12 Township: 10.0S Range: 22.0E Meridian: S		9. API NUMBER: 43047519760000
5. FIELD and POOL or WILDCAT: NATURAL BUTTES		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: UINTAH		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE	
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> ALTER CASING	
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CASING REPAIR	
<input checked="" type="checkbox"/> DRILLING REPORT Report Date: 8/9/2013	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	
	<input type="checkbox"/> CHANGE WELL STATUS	
	<input type="checkbox"/> CHANGE WELL NAME	
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	
	<input type="checkbox"/> CONVERT WELL TYPE	
	<input type="checkbox"/> DEEPEN	
	<input type="checkbox"/> FRACTURE TREAT	
	<input type="checkbox"/> NEW CONSTRUCTION	
	<input type="checkbox"/> OPERATOR CHANGE	
	<input type="checkbox"/> PLUG AND ABANDON	
	<input type="checkbox"/> PLUG BACK	
	<input checked="" type="checkbox"/> PRODUCTION START OR RESUME	
	<input type="checkbox"/> RECLAMATION OF WELL SITE	
	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION	
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	
	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	
	<input type="checkbox"/> TEMPORARY ABANDON	
	<input type="checkbox"/> TUBING REPAIR	
	<input type="checkbox"/> VENT OR FLARE	
	<input type="checkbox"/> WATER DISPOSAL	
	<input type="checkbox"/> WATER SHUTOFF	
	<input type="checkbox"/> SI TA STATUS EXTENSION	
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	
	<input type="checkbox"/> OTHER: <input style="width: 100px;" type="text"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. THE SUBJECT WELL WAS PLACED ON PRODUCTION ON 8/9/2013. THE CHRONOLOGICAL WELL HISTORY WILL BE SUBMITTED WITH THE WELL COMPLETION REPORT.		
Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY August 12, 2013		
NAME (PLEASE PRINT) Teena Paulo	PHONE NUMBER 720 929-6236	TITLE Staff Regulatory Specialist
SIGNATURE N/A	DATE 8/12/2013	

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UT ST UO 01197-
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 1022-1211BS
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2350 FSL 0974 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESE Section: 12 Township: 10.0S Range: 22.0E Meridian: S		9. API NUMBER: 43047519760000
5. FIELD and POOL or WILDCAT: NATURAL BUTTES		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: UINTAH		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 11/26/2013	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION	
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION	
<input type="checkbox"/> DRILLING REPORT Report Date:	<input checked="" type="checkbox"/> OTHER OTHER: ACTS PIT	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. FINISHED DRILLING TO 8486 ON 6/17/2013. CEMENTED PRODUCTION CASING. RELEASED PIONEER 54 RIG ON 6/18/2013. DETAILS OF CASING AND CEMENT WAS INCLUDED WITH THE WELL COMPLETION REPORT. THE PIT ON THIS LOCATION WILL BE REFURBISHED AND UTILIZED AS PART OF THE ACTS SYSTEM.		
Approved by the Utah Division of Oil, Gas and Mining Date: January 09, 2014 By: 		
NAME (PLEASE PRINT) Teena Paulo	PHONE NUMBER 720 929-6236	TITLE Staff Regulatory Specialist
SIGNATURE N/A	DATE 11/26/2013	

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

AMENDED REPORT ☐ FORM 8
(highlight changes)

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. TYPE OF WELL: OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> DRY <input type="checkbox"/> OTHER _____ b. TYPE OF WORK: NEW WELL <input type="checkbox"/> HORIZ. LATS <input type="checkbox"/> DEEP-EN <input type="checkbox"/> RE-ENTRY <input type="checkbox"/> DIFF. RESVR. <input type="checkbox"/> OTHER _____						5. LEASE DESIGNATION AND SERIAL NUMBER: UT ST UO 01197-A ST 6. IF INDIAN, ALLOTTEE OR TRIBE NAME 			
2. NAME OF OPERATOR: KERR-MCGEE OIL AND GAS ONSHORE LP						7. UNIT or CA AGREEMENT NAME UTU63047A			
3. ADDRESS OF OPERATOR: P.O. Box 173779 CITY Denver STATE Co ZIP 82017						8. WELL NAME and NUMBER: NBU 1022-12I1BS			
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: NESE 2350 FSL 974 FEL AT TOP PRODUCING INTERVAL REPORTED BELOW: NESE 2564 FSL 498 FEL AT TOTAL DEPTH: NESE 2567 FSL 482 FEL						9. API NUMBER: 43-047-51976			
10. FIELD AND POOL, OR WILDCAT Natural Buttes						11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NESE 12 10S 22E SLB			
12. COUNTY UINTAH						13. STATE UTAH			
14. DATE SPUDDED: 2/15/2013		15. DATE T. D. REACHED: 6/17/2013		16. DATE COMPLETED: 8/9/2013		17. ELEVATIONS (DF, RKB, RT, GL): 5241 RKB			
18. TOTAL DEPTH: MD 8486 TVD 8432		19. PLUG BACK T.D.: MD 8429 TVD 8374		20. IF MULTIPLE COMPLETIONS, HOW MANY? *		21. DEPTH BRIDGE PLUG SET: MD TVD			
22. TYPE ELECTRIC AND OTHER MECHANICAL LOGS RUN (Submit copy of each) CBL/GR/CCL/TEMP						23. WAS WELL CORED? NO <input checked="" type="checkbox"/> YES <input type="checkbox"/> (Submit analysis) WAS DST RUN? NO <input checked="" type="checkbox"/> YES <input type="checkbox"/> (Submit report) DIRECTIONAL SURVEY? NO <input type="checkbox"/> YES <input checked="" type="checkbox"/> (Submit copy)			
24. CASING AND LINER RECORD (Report all strings set in well)									
HOLE SIZE	SIZE/GRADE	WEIGHT (#/ft.)	TOP (MD)	BOTTOM (MD)	STAGE CEMENTER DEPTH	CEMENT TYPE & NO. OF SACKS	SLURRY VOLUME (BBL)	CEMENT TOP **	AMOUNT PULLED
20	14 STL	36.7	0	40		28			
11	8.63 J-55	28	19	2324		900		0	
7.875	4.5 I-80	11.6	19	8476		1420		1200	
25. TUBING RECORD									
SIZE	DEPTH SET (MD)	PACKER SET (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)	
2.375	7759								
26. PRODUCING INTERVALS					27. PERFORATION RECORD				
FORMATION NAME	TOP (MD)	BOTTOM (MD)	TOP (TVD)	BOTTOM (TVD)	INTERVAL (Top/Bot - MD)	SIZE	NO. HOLES	PERFORATION STATUS	
(A) WASATCH	5564	5990			5,564 5,990	0.36	48	Open <input checked="" type="checkbox"/>	Squeezed <input type="checkbox"/>
(B) MESAVERDE	6904	8303			6,904 8,303	0.36	144	Open <input checked="" type="checkbox"/>	Squeezed <input type="checkbox"/>
(C)								Open <input type="checkbox"/>	Squeezed <input type="checkbox"/>
(D)								Open <input type="checkbox"/>	Squeezed <input type="checkbox"/>
28. ACID, FRACTURE, TREATMENT, CEMENT SQUEEZE, ETC.									
DEPTH INTERVAL		AMOUNT AND TYPE OF MATERIAL							
5564-8303		PUMP 8331 BBLS SLICK H2O & 191,501 LBS 30/50 OTTAWA SAND							
		8 STAGES							
29. ENCLOSED ATTACHMENTS: <input type="checkbox"/> ELECTRICAL/MECHANICAL LOGS <input type="checkbox"/> GEOLOGICAL REPORT <input type="checkbox"/> DST REPORT <input checked="" type="checkbox"/> DIRECTIONAL SURVEY <input type="checkbox"/> SUNDRY NOTICE FOR PLUGGING AND CEMENT VERIFICATION <input type="checkbox"/> CORE ANALYSIS <input type="checkbox"/> OTHER:									30. WELL STATUS: PRODUCING

31. INITIAL PRODUCTION

INTERVAL A (As shown in Item #26)

DATE FIRST PRODUCED:	TEST DATE:	HOURS TESTED:	TEST PRODUCTION RATES:	OIL - BBL:	GAS - MCF:	WATER - BBL:	PROD. METHOD:
8/9/2013	8/14/2013	24	→	4	1583	0	Flowing
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR RATES:	INTERVAL STATUS
20/64	1232	1718				→	Producing

INTERVAL B (As shown in Item #26)

DATE FIRST PRODUCED:	TEST DATE:	HOURS TESTED:	TEST PRODUCTION RATES:	OIL - BBL:	GAS - MCF:	WATER - BBL:	PROD. METHOD:
			→				
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR RATES:	INTERVAL STATUS
						→	

INTERVAL C (As shown in Item #26)

DATE FIRST PRODUCED:	TEST DATE:	HOURS TESTED:	TEST PRODUCTION RATES:	OIL - BBL:	GAS - MCF:	WATER - BBL:	PROD. METHOD:
			→				
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR RATES:	INTERVAL STATUS
						→	

INTERVAL D (As shown in Item #26)

DATE FIRST PRODUCED:	TEST DATE:	HOURS TESTED:	TEST PRODUCTION RATES:	OIL - BBL:	GAS - MCF:	WATER - BBL:	PROD. METHOD:
			→				
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR RATES:	INTERVAL STATUS
						→	

32. DISPOSITION OF GAS (Sold, Used for Fuel, Vented, Etc.)

SOLD

33. SUMMARY OF POROUS ZONES (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

34. FORMATION (Log) MARKERS:

Formation	Top (MD)	Bottom (MD)	Descriptions, Contents, etc.	Name	Top (Measured Depth)
				GREEN RIVER	1203
				BIRD'S NEST	1366
				MAHOGANY	1846
				WASATCH	4160
				MESAVERDE	6241

35. ADDITIONAL REMARKS (Include plugging procedures)

The first 210 ft. of the surface hole was drilled with a 12 ¼ in. bit. The remainder of surface hole was drilled with an 11in. bit. DQX csg was run from surface to 5026 ft.; LTC csg was run from 5026 ft. to 8476 ft. Attached is the chronological well history, perforation report & final survey.

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records.

NAME (PLEASE PRINT) Teena PauloTITLE Staff Regulatory SpecialistSIGNATURE DATE 9-5-13

This report must be submitted within 30 days of

- completing or plugging a new well
- reentering a previously plugged and abandoned well
- drilling horizontal laterals from an existing well bore
- significantly deepening an existing well bore below the previous bottom-hole depth
- recompleting to a different producing formation
- drilling hydrocarbon exploratory holes, such as core samples and stratigraphic tests

* ITEM 20: Show the number of completions if production is measured separately from two or more formations.

** ITEM 24: Cement Top - Show how reported top(s) of cement were determined (circulated (CIR), calculated (CAL), cement bond log (CBL), temperature survey (TS)).

Send to: Utah Division of Oil, Gas and Mining
1594 West North Temple, Suite 1210
Box 145801
Salt Lake City, Utah 84114-5801

Phone: 801-538-5340

Fax: 801-359-3940

US ROCKIES REGION
Operation Summary Report

Well: NBU 1022-121BS ORANGE

Spud Date: 5/7/2013

Project: UTAH-UINTAH

Site: NBU 1022-121 PAD

Rig Name No: PROPETRO 12/12, PIONEER 54/54

Event: DRILLING

Start Date: 4/21/2013

End Date: 6/17/2013

Active Datum: RKB @5,241.00usft (above Mean Sea Level)

UWI: NE/SE/0/10/S/22/E/1 2/0/0/26/PM/S/2350/E/0/974/0/0

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
5/6/2013	22:00 - 23:30	1.50	MIRU	01	B	P	59	RIG UP DIVERTER & FLOW LINE. SPOT RIG MAT OVER WELL. SPOT RIG OVER WELL. SET CAT WALK & PIPE RACKS. HOOK UP AND PRIME PUMP.
	23:30 - 0:00	0.50	MIRU	23		P	59	PRE SPUD SAFETY MEETING WITH RIG CREW, NOV CREW, AND SCIENTIFIC CREW. REVIEW DIRECTIONAL PLANS WITH DIRECTIONAL DRILLERS PRIOR TO SPUD.
5/7/2013	0:00 - 1:00	1.00	DRLSUR	06	A	P	59	PICK UP 12 1/4" BIT & 8" MUD MOTOR. TRIP IN HOLE.
	1:00 - 2:30	1.50	DRLSUR	02	B	P	59	DRILL 12.25" SURFACE HOLE F/44'- T/210' BIT ROP= 166' @ 110.6 FPH WOB= 5-15K. RPM= TOP DRIVE~55 / MOTOR ~83 / TOTAL RPM~138 PUMPING 491 GPM @ 120 SPM STAND PIPE PRESSURE ON/OFF= 800/600 TORQUE ON/OFF = 2,500/1,000 UP/DN/ROT = 22/20/20 NOV ON LINE MUD WT = 8.4
	2:30 - 3:00	0.50	DRLSUR	06	A	P	225	TRIP OUT OF HOLE & LAY DOWN 12.25" BIT
	3:00 - 3:30	0.50	DRLSUR	06	A	P	225	PICK UP 11" BIT AND DIRECTIONAL TOOLS, SCRIBE AND TRIP IN HOLE
	3:30 - 6:00	2.50	DRLSUR	02	B	P	225	DRILL 11" SURFACE HOLE F/210' -T/620' BIT ROP= 410' @ 164 FPH WEIGHT ON BIT = 18-20K. RPM= TOP DRIVE~55 / MOTOR ~83 / TOTAL RPM~138 PUMPING 491 GPM @ 120 SPM STANDPIPE PRESSURE ON/OFF= 800/600 TORQUE ON/OFF = 2,000/800 UP/DOWN/ ROT= 50/42/46K.~DRAG= 6K NOV ON LINE MUD WT = 8.4 HOLE ISSUES = NONE SLID 50' = 10.35% 3.3' ABOVE AND 2.6 LEFT OF THE LINE
	6:00 - 12:30	6.50	DRLSUR	02	B	P	635	DRILL 11" SURFACE HOLE F/620' -T/1,500' BIT ROP= 880' @ 135.3 FPH WEIGHT ON BIT = 18-20K. RPM= TOP DRIVE~55 / MOTOR ~83 / TOTAL RPM~138 PUMPING 491 GPM @ 120 SPM STANDPIPE PRESSURE ON/OFF= 1,030/780 TORQUE ON/OFF = 2,800/1,300 UP/DOWN/ ROT= 70/55/60K.~DRAG= 10K NOV ON LINE MUD WT = 8.4 HOLE ISSUES = LOST CIRCULATION @ 1,500' SLID 32' = 4% 7' ABOVE AND 5' RIGHT OF THE LINE

Operation Summary Report

Well: NBU 1022-121BS ORANGE

Spud Date: 5/7/2013

Project: UTAH-UINTAH

Site: NBU 1022-121 PAD

Rig Name No: PROPETRO 12/12, PIONEER 54/54

Event: DRILLING

Start Date: 4/21/2013

End Date: 6/17/2013

Active Datum: RKB @5,241.00usft (above Mean Sea Level)

UWI: NE/SE/0/10/S/22/E/1 2/0/0/26/PM/S/2350/E/0/974/0/0

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	12:30 - 17:30	5.00	DRLSUR	02	B	P	1515	DRILL 11" SURFACE HOLE F/1,500' -T/1,950' BIT ROP= 450' @ 90 FPH WEIGHT ON BIT = 18-20K. RPM= TOP DRIVE~55 / MOTOR ~83 / TOTAL RPM~138 PUMPING 491 GPM @ 120 SPM STANDPIPE PRESSURE ON/OFF= 1,280/1,100 TORQUE ON/OFF = 2,900/1,400 UP/DOWN/ ROT= 74/60/68K.~DRAG= 6K NOV ON LINE MUD WT = 8.4 HOLE ISSUES = LOST CIRCULATION @ 1,500' SLID 30' = 5.54% 8.2' ABOVE AND 2.5' RIGHT OF THE LINE
	17:30 - 22:00	4.50	DRLSUR	02	B	P	1965	DRILL 11" SURFACE HOLE F/1,950' -T/2,339' BIT ROP= 389' @ 86.4 FPH WEIGHT ON BIT = 18-20K. RPM= TOP DRIVE~45 / MOTOR ~83 / TOTAL RPM~128 PUMPING 491 GPM @ 120 SPM STANDPIPE PRESSURE ON/OFF= 1,280/1,100 TORQUE ON/OFF = 3,100/1,800 UP/DOWN/ ROT= 84/66/75K.~DRAG= 9K NOV ON LINE MUD WT = 8.4 HOLE ISSUES = LOST CIRCULATION @ 1500' SLID 30' = 7.77% 4.1' ABOVE AND 2.1' RIGHT OF THE LINE
	22:00 - 0:00	2.00	DRLSUR	05	C	P	2354	CIRCULATE AND CONDITION HOLE, RETURNS ARE CLEAN COMING OVER SHAKERS, 4-400 BBL UPRIGHT'S FULL AND 2-400 BBL UPRIGHTS EMPTY, MUD TANKS FULL.
5/8/2013	0:00 - 3:30	3.50	DRLSUR	06	D	P	2354	TRIP OUT OF HOLE, LAY DOWN DRILL PIPE, BOTTOM HOLE ASSEMBLY, DIRECTIONAL TOOLS, MOTOR AND, BIT.
	3:30 - 4:30	1.00	CSGSUR	12	B	P	2354	PRE JOB SAFETY MEETING. MOVE PIPE RACKS AND CATWALK. PULL DIVERTER HEAD. RIG UP TO RUN SURFACE CASING.
	4:30 - 7:00	2.50	CSGSUR	12	C	P	2254	RAN 52 JOINTS (2,309.03') OF 8 5/8", 28#, J-55, LT&C CASING WITH TOPCO FLOAT GUIDE SHOE AND BAFFLE PLATED LOCATED 1 JOINT ABOVE SHOE. 5 CENTRALIZERS SPACED 10' ABOVE SHOE, 2ND & 3RD COLLARS, AND EVERY THIRD COLLAR TO 1,952'. LANDED CASING SHOE AT 2,309'. BAFFLE PLATE AT 2,263'.

Operation Summary Report

Well: NBU 1022-121BS ORANGE

Spud Date: 5/7/2013

Project: UTAH-UINTAH

Site: NBU 1022-121 PAD

Rig Name No: PROPETRO 12/12, PIONEER 54/54

Event: DRILLING

Start Date: 4/21/2013

End Date: 6/17/2013

Active Datum: RKB @5,241.00usft (above Mean Sea Level)

UWI: NE/SE/0/10/S/22/E/1 2/0/0/26/PM/S/2350/E/0/974/0/0

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	7:00 - 9:00	2.00	CSGSUR	12	E	P	2254	PRE JOB SAFETY MEETING. RAN 200' OF 1". PIPE DOWN BACK-SIDE OF CASING. PRESSURE TEST LINES TO 2000 PSI. PUMP 145 BBLS OF FRESH WATER CLEARING SHOE. MIX AND PUMP 20 BBLS OF 8.5# GEL WATER FLUSH AHEAD OF CEMENT. MIX AND PUMP 300 SX PREMIUM CEMENT, 61.4 BBLS MIXED AT 15.8 PPG WITH YIELD OF 1.15 CF/SX. DROP PLUG ON FLY. DISPLACE WITH 139 BBLS OF FRESH WATER. NO RETURNS THROUGH OUT JOB. FINAL LIFT OF 260 PSI AT 3 BBL/MINUTE. BUMP PLUG WITH 580 PSI, HELD 580 PSI FOR 5 MINUTES, TESTED FLOAT AND FLOAT HELD. PLUG DOWN AT 08:25, 5/8/2013. MIX AND PUMP TOP JOB # 1 WITH 150 SX PREMIUM CEMENT, 30.7 BBLS MIXED AT 15.8 PPG WITH YIELD OF 1.15 CF/SX. NO RETURNS TO SURFACE. WAIT ON CEMENT 2 HOURS. MIX AND PUMP TOP JOB # 2 WITH 150 SX OF PREMIUM CEMENT, 30.7 BBLS MIXED AT 15.8 PPG WITH YIELD OF 1.15 CF/SX. NO RETURNS TO SURFACE MIX AND PUMP TOP JOB # 3 WITH 200 SX OF PREMIUM CEMENT, 40.9 BBLS MIXED AT 15.8 PPG WITH YIELD OF 1.15 CF/SX. NO RETURNS TO SURFACE. WAIT ON CEMENT 2 HOURS. MIX AND PUMP TOP JOB # 4 WITH 100 SX OF PREMIUM CEMENT, 20.4 BBLS MIXED AT 15.8 PPG WITH YIELD OF 1.15 CF/SX. 3 BBLS CEMENT TO SURFACE. RELEASE RIG @ 09:00, 5/8/2013
6/14/2013	0:00 - 1:00	1.00	MIRU3	01	C	P	2354	SKID RIG 10' TO THE NBU 1022-1211CS
	1:00 - 2:30	1.50	PRPSPD	14	A	P	2354	NIPPLE UP AND FUNCTION TEST BOPE,CHANGE ROTATING HEAD ASSEMBLY
	2:30 - 7:00	4.50	PRPSPD	15	A	P	2354	HELD SAFETY MEETING WITH RIG CREW & B & C TESTER, R/U & TEST BOPE, TEST PIPE RAMS, BLIND RAMS, INNER-OUTER BOP VALVES, CHOKE VALVES, FLOOR VALVES FOR 5 MIN 250 LOW,10 MIN 5000 HIGH, ANN 5 MIN 250- 10 MIN 2500, SURFACE CASING 1500 FOR 30 MIN'S
	7:00 - 7:30	0.50	PRPSPD	14	B	P	2354	INSTALL WEAR BUSHING,TIGHTEN TURN BUCKLES,PRES SPUD INSPECTION
	7:30 - 9:30	2.00	PRPSPD	06	A	P	2354	PAU BHA & SCRIBE, TRIP IN HOLE TO TOP OF CEMENT @ 2258'
	9:30 - 10:30	1.00	DRLPRC	02	F	P	2354	DRILL CEMENT & SHOE TRACK BAFFLE @2278, SHOE @2322 & NEW 7.875" HOLE TO 2354

Operation Summary Report

Well: NBU 1022-121BS ORANGE

Spud Date: 5/7/2013

Project: UTAH-UINTAH

Site: NBU 1022-121 PAD

Rig Name No: PROPETRO 12/12, PIONEER 54/54

Event: DRILLING

Start Date: 4/21/2013

End Date: 6/17/2013

Active Datum: RKB @5,241.00usft (above Mean Sea Level)

UWI: NE/SE/0/10/S/22/E/1 2/0/0/26/PM/S/2350/E/0/974/0/0

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	10:30 - 17:30	7.00	DRLPRC	02	B	P	2354	CLOSED LOOP SYSTEM DRILL F/2354 TO 3389=1035@147 FT/HR WOB / 18-20 RPM TOP DRIVE 55-60 +130 (2 PUMPS) - SPM 200 GPM 586 MW 8.7 PPG VIS 30 TRQ ON/OFF = 9/6 K PSI ON /OFF 2000/1650 , DIFF 300-500 PU/SO/RT = 120-80-114K SLIDE =82 ROT =953 NOV / 2-DEWATERING 46' NW OF TARGET CENTER 0 0 DRILL FLARE, 0 CONN FLARE
	17:30 - 18:00	0.50	DRLPRC	07	A	P	3389	RIG SERVICE
	18:00 - 0:00	6.00	DRLPRC	02	B	P	3389	CLOSED LOOP SYSTEM DRILL F/3389 TO 4425=1039@172 FT/HR WOB / 18-20 RPM TOP DRIVE 55-60 +130 (2 PUMPS) - SPM 200 GPM 586 MW 8.7 PPG VIS 30 TRQ ON/OFF = 9/6 K PSI ON /OFF 2000/1650 , DIFF 300-500 PU/SO/RT = 145-110-125K SLIDE =20 ROT =1019 NOV / 2-DEWATERING 28' NW OF TARGET CENTER 0 0 DRILL FLARE, 0 CONN FLARE
6/15/2013	0:00 - 17:00	17.00	DRLPRV	02	B	P	4425	CLOSED LOOP SYSTEM DRILL F/4425 TO 6031=1606@94FT/HR WOB / 18-25 RPM TOP DRIVE 55-60 +130 (2 PUMPS) - SPM 200 GPM 586 MW 8.7 PPG VIS 30 TRQ ON/OFF = 9/6 K PSI ON /OFF 2000/1650 , DIFF 300-500 PU/SO/RT = 145-110-125K SLIDE =15 ROT =1591 NOV / 2-DEWATERING 12'SOUTH 4' WEST OF TARGET CENTER 0 DRILL FLARE, 0 CONN FLARE
	17:00 - 17:30	0.50	DRLPRV	07	A	P	6031	RIG SERVICE
	17:30 - 0:00	6.50	DRLPRV	02	B	P	6031	CLOSED LOOP SYSTEM DRILL F/6031 TO 6585=554@85 FT/HR WOB / 20-28 RPM TOP DRIVE 55-60 +130 (2 PUMPS) - SPM 200 GPM 586 MW 8.7 PPG VIS 30 TRQ ON/OFF = 9/6 K PSI ON /OFF 2000/1650 , DIFF 300-500 PU/SO/RT = 145-110-125K SLIDE =30 ROT =524 NOV / 2-DEWATERING 10'N 4' WEST OF TARGET CENTER 0 DRILL FLARE, 0 CONN FLARE

Operation Summary Report

Well: NBU 1022-121BS ORANGE

Spud Date: 5/7/2013

Project: UTAH-UINTAH

Site: NBU 1022-121 PAD

Rig Name No: PROPETRO 12/12, PIONEER 54/54

Event: DRILLING

Start Date: 4/21/2013

End Date: 6/17/2013

Active Datum: RKB @5,241.00usft (above Mean Sea Level)

UWI: NE/SE/0/10/S/22/E/1 2/0/0/26/PM/S/2350/E/0/974/0/0

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
6/16/2013	0:00 - 8:00	8.00	DRLPRV	02	B	P	6585	CLOSED LOOP SYSTEM DRILL F/6585 TO 7300=715@89 FT/HR WOB / 20-26 RPM TOP DRIVE 55-60 +130 (2 PUMPS) - SPM 200 GPM 586 MW 8.7 PPG VIS 30 TRQ ON/OFF = 9/6 K PSI ON /OFF 2000/1650 , DIFF 300-500 PU/SO/RT =190-145-165K SLIDE = ROT = NOV / 2-DEWATERING 18'N 5'WEST OF TARGET CENTER 0 DRILL FLARE, 5 CONN FLARE
	8:00 - 15:00	7.00	DRLPRV	02	B	P	7300	CLOSED LOOP SYSTEM DRILL F/7300 TO 7818=518 @74 FT/HR WOB / 20-26 RPM TOP DRIVE 55-60 +130 (2 PUMPS) - SPM 200 GPM 586 MW 8.6 PPG VIS 30 TRQ ON/OFF = 11/8 K PSI ON /OFF 2100/1700 , DIFF 300-500 PU/SO/RT =200-155-170K SLIDE = ROT = NOV / 2-DEWATERING 10 NORTH 6 WEST OF TARGET CENTER 3 DRILL FLARE, 5 CONN FLARE
	15:00 - 15:30	0.50	DRLPRV	07	A	P	7818	RIG SERVICE
	15:30 - 16:30	1.00	DRLPRV	05	G	P	7818	DISPLACE HOLE WITH 11.8 MUD@ 180 STKS 527 GPM PSI
	16:30 - 0:00	7.50	DRLPRV	02	B	P	7818	CLOSED LOOP SYSTEM DRILL F/7818 TO 8387=569 @75 FT/HR WOB / 20-28 RPM TOP DRIVE 55-60 +130 (2 PUMPS) - SPM 200 GPM 586 MW 11.8 PPG VIS 40 TRQ ON/OFF =10/8 K PSI ON /OFF 2100/1700 , DIFF 300-500 PU/SO/RT =200-150-170K SLIDE =0 ROT =569 NOV / 2-DEWATERING 0 NORTH 9 EAST OF TARGET CENTER 3 DRILL FLARE, 5 CONN FLARE
6/17/2013	0:00 - 0:30	0.50	DRLPRV	02	B	P	8387	CLOSED LOOP SYSTEM DRILL F/8387-8403=16 @75 FT/HR WOB / 20-28 RPM TOP DRIVE 55-60 +130 (2 PUMPS) - SPM 200 GPM 586 MW 11.8 PPG VIS 40 TRQ ON/OFF =10/8 K PSI ON /OFF 2500/2100 , DIFF 300-500 PU/SO/RT =200-150-170K SLIDE =0 ROT =16 NOV / 2-BYPASSED 0 NORTH 9 EAST OF TARGET CENTER 0 DRILL FLARE, 0 CONN FLARE
	0:30 - 1:00	0.50	DRLPRV	08	B	S	8403	CHANGE SWAB IN #2 PUMP

Operation Summary Report

Well: NBU 1022-121BS ORANGE

Spud Date: 5/7/2013

Project: UTAH-UINTAH

Site: NBU 1022-121 PAD

Rig Name No: PROPETRO 12/12, PIONEER 54/54

Event: DRILLING

Start Date: 4/21/2013

End Date: 6/17/2013

Active Datum: RKB @5,241.00usft (above Mean Sea Level)

UWI: NE/SE/0/10/S/22/E/1 2/0/0/26/PM/S/2350/E/0/974/0/0

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	1:00 - 2:00	1.00	DRLPRV	02	B	P		CLOSED LOOP SYSTEM DRILL F/8387-8403=16 @75 FT/HR WOB / 20-28 RPM TOP DRIVE 55-60 +130 (2 PUMPS) - SPM 200 GPM 586 MW 11.8 PPG VIS 40 TRQ ON/OFF =10/8 K PSI ON /OFF 2100/1700 , DIFF 300-500 PU/SO/RT =200-150-170K SLIDE =0 ROT =16 NOV / 2-BYPASSED 0 NORTH 9 EAST OF TARGET CENTER 0 DRILL FLARE, 0 CONN FLARE
	2:00 - 3:00	1.00	DRLPRV	05	C	P	8486	FINAL SURVEY FLOW CHECK/NO FLOW,MW 11.9/40
	3:00 - 4:30	1.50	DRLPRV	06	E	P	8486	SHORTTRIP 20 STANDS,NO PROBLEMS
	4:30 - 5:30	1.00	DRLPRV	05	C	P	8486	CIRCULATE BOTTOMS UP,2' FLARE FOR 3 MINUTES,SAFETY MEET W/ KIMZEY & RIG UP MACHINE
	5:30 - 11:30	6.00	DRLPRV	06	A	P	8486	LAYDOWN DRILL PIPE & BHA,
	11:30 - 12:00	0.50	CSGPRO	14	B	P	8486	PULL WEARBUSHING
	12:00 - 17:30	5.50	CSGPRO	12	C	P	8486	HELD SAFETY MEETING WITH KIMZEY RIG UP & RUN 194 TOTAL JTS(78 JTS I-80 4.5" 11.6# 8 RND LTC, 1 MARKER @6262 1-CROSSOVER @DQX 5004-5025 LTC 113 I-80 DQX 4.5 #11.6 PROD CASING, 1 MANDREL TAIL JT TO GL) SHOE @ 8476, FLOAT COLLAR @8429, CHECK FLOAT EQUIPMENT AND CIRCULATE 5/MIN- 20 JTS IN AND BREAK CIRC AGAIN AFTER CROSSOVER JT,RUN IN WITH NO HOLE PROBLEMS LAND ON MANDREL HANGER WITH 85K,
	17:30 - 20:00	2.50	CSGPRO	05	D	P	8486	CIRCULATE AND CONDITION FOR CEMENT @ 120 STKS 360GPM,480 PSI,5 FLARE FOR 5 MINUTES,WAIT ON CEMENTERS FOR 1 HR
	20:00 - 22:30	2.50	CSGPRO	12	E	P	8486	HELD SAFETY MEETING WITH RIG & CEMENTING CREWS, TEST LINES TO 5000, DROP BOTTOM PLUG, PUMP 25 BBLS WATER SPACER, LEAD 15% EXCESS, 470 SACKS 12.5 PPG 1.98 YLD,PLII +6%GELL +5#skKS +.4%FL52 +.2%SMS +.4% R-3+5#/skSF + 1/4#skCF TAIL 15% EXCESS 970 SACKS 14.3 PPG 1.32 YLD,50/50 poz+2%gell+0.55% R-3 + 10%salt+5#blnd S.F.75%SMS SHUT DOWN CLEAN LINES, DROP TOP PLUG & DISPLACE WITH 130 BBLS CLAYCARE WATER, BUMP PLUG @2600 PSI, 600 OVER FINAL LIFT OF 2000 PSI, FLOATS HELD, FULL RETURNS THRU OUT JOB WITH 10 BBLS LEAD BACK TO SURFACE, 1.5 BBLS BACK TO TRUCK, EST TOP OF TAIL 3640', LEAD 0, FLUSH LINES & STACK , R/D
	22:30 - 0:00	1.50	RDMO	14	B	P	8486	RIG DOWN LANDING JOINT,SET PACK OFF WITH CAMERON AND RELOAD HANGER,NIPPLE DOWN BOP,SAVE MUD AND PREP FOR PAD MOVE TO NBU1022-12P4CS,RELEASE RIG 23:59 6/17/2013

US ROCKIES REGION

1 General

1.1 Customer Information

Company	US ROCKIES REGION
Representative	
Address	

1.2 Well/Wellbore Information

Well	NBU 1022-121BS ORANGE	Wellbore No.	OH
Well Name	NBU 1022-121BS	Wellbore Name	NBU 1022-121BS
Report No.	1	Report Date	8/5/2013
Project	UTAH-UINTAH	Site	NBU 1022-121 PAD
Rig Name/No.		Event	COMPLETION
Start Date	7/30/2013	End Date	8/9/2013
Spud Date	5/7/2013	Active Datum	RKB @5,241.00usft (above Mean Sea Level)
UWI	NE/SE/O/10/S/22/E/12/O/O/26/PM/S/2350/E/O/974/O/O		

1.3 General

Contractor		Job Method	Supervisor
Perforated Assembly		Conveyed Method	

1.4 Initial Conditions

Fluid Type		Fluid Density		Gross Interval	5,564.0 (usft)-8,303.0 (usft)	Start Date/Time	8/5/2013 12:00AM
Surface Press		Estimate Res Press		No. of Intervals	45	End Date/Time	8/5/2013 12:00AM
TVD Fluid Top		Fluid Head		Total Shots	192	Net Perforation Interval	60.00 (usft)
Hydrostatic Press		Press Difference		Avg Shot Density	3.20 (shot/ft)	Final Surface Pressure	
Balance Cond	NEUTRAL					Final Press Date	

1.5 Summary

2 Intervals

2.1 Perforated Interval

Date	Formation/Reservoir	CCL@ (usft)	CCL-T S (usft)	MD Top (usft)	MD Base (usft)	Shot Density (shot/ft)	Misfires/Add. Shot	Diameter (in)	Carr Type /Stage No	Carr Size (in)	Phasing (°)	Charge Desc /Charge Manufacturer	Charge Weight (gram)	Reason	Misrun
8/5/2013 12:00AM	WASATCH/			5,564.0	5,566.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N

US ROCKIES REGION

2.1 Perforated Interval (Continued)

Date	Formation/ Reservoir	CCL@ (usft)	CCL-T S (usft)	MD Top (usft)	MD Base (usft)	Shot Density (shot/ft)	Misfires/ Add. Shot	Diameter (in)	Carr Type /Stage No	Carr Size (in)	Phasing (°)	Charge Desc /Charge Manufacturer	Charge Weight (gram)	Reason	Misrun
8/5/2013 12:00AM	WASATCH/			5,610.0	5,613.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	WASATCH/			5,678.0	5,681.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	WASATCH/			5,796.0	5,798.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	WASATCH/			5,810.0	5,812.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	WASATCH/			5,866.0	5,868.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	WASATCH/			5,988.0	5,990.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			6,904.0	6,905.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			6,912.0	6,913.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			6,930.0	6,931.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			6,968.0	6,969.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			6,990.0	6,991.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,000.0	7,001.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,020.0	7,021.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,034.0	7,035.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,068.0	7,069.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,080.0	7,081.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,120.0	7,121.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,148.0	7,149.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,190.0	7,191.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,208.0	7,209.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,285.0	7,287.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N

RECEIVED: Oct. 25, 2013

US ROCKIES REGION

2.1 Perforated Interval (Continued)

Date	Formation/ Reservoir	CCL@ (usft)	CCL-T S (usft)	MD Top (usft)	MD Base (usft)	Shot Density (shot/ft)	Misfires/ Add. Shot	Diameter (in)	Carr Type /Stage No	Carr Size (in)	Phasing (°)	Charge Desc /Charge Manufacturer	Charge Weight (gram)	Reason	Misrun
8/5/2013 12:00AM	MESAVERDE/			7,326.0	7,327.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,346.0	7,347.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,362.0	7,363.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,366.0	7,387.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,432.0	7,433.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,470.0	7,471.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,530.0	7,531.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,572.0	7,573.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,595.0	7,596.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,640.0	7,641.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,700.0	7,701.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,722.0	7,723.0	4.00		0.360	EXP/	3.375	90.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,792.0	7,793.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,810.0	7,811.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,900.0	7,901.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,920.0	7,921.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,952.0	7,953.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			7,958.0	7,959.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			8,001.0	8,003.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			8,157.0	8,159.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N
8/5/2013 12:00AM	MESAVERDE/			8,279.0	8,281.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO	N

RECEIVED: Oct. 25, 2013


US ROCKIES REGION

2.1 Perforated Interval (Continued)

Date	Formation/ Reservoir	CCL@ (usft)	CCL-T S (usft)	MD Top (usft)	MD Base (usft)	Shot Density (shot/ft)	Misfires/ Add. Shot	Diamete r (in)	Carr Type /Stage No	Carr Size (in)	Phasing (°)	Charge Desc /Charge Manufacturer	Charge Weight (gram)	Reason	Misrun
8/5/2013 12:00AM	MESAVERDE/			8,294.0	8,296.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO N	
8/5/2013 12:00AM	MESAVERDE/			8,301.0	8,303.0	3.00		0.360	EXP/	3.375	120.00		23.00	PRODUCTIO N	

3 Plots

3.1 Wellbore Schematic

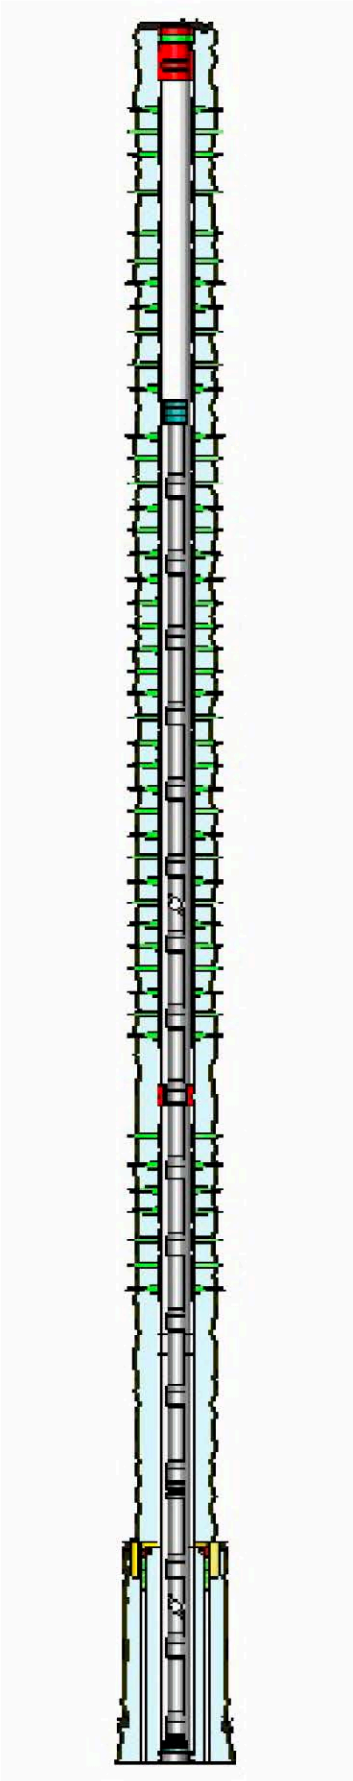

RECEIVED: Oct. 25, 2013

US ROCKIES REGION
Operation Summary Report

Well: NBU 1022-121BS ORANGE				Spud Date: 5/7/2013					
Project: UTAH-UINTAH				Site: NBU 1022-121 PAD				Rig Name No: GWS 1/1	
Event: COMPLETION				Start Date: 7/30/2013				End Date: 8/9/2013	
Active Datum: RKB @5,241.00usft (above Mean Sea Level)				UWI: NE/SE/0/10/S/22/E/1 2/0/0/26/PM/S/2350/E/0/974/0/0					
Date	Time Start-End		Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
6/29/2013	-								
7/30/2013	6:00	- 7:00	1.00	SUBSPR	52	B	P		FILL SURFACE CSG. MIRU CAMERON QUICK TEST. PRESSURE TEST CSG & FRAC VALVES 1ST PSI TEST T/ 7000 PSI. HELD FOR 15 MIN LOST 84 PSI. NO COMMUNICATION OR MIGRATION WITH SURFACE CSG BLEED OFF PSI. PRESSURE TEST 8 5/8 X 4 1/2 TO 560 PSI HELD FOR 5 MIN LOST -38 PSI,BLED PSI OFF, REINSTALLED POP OFF SWIFN NO PRESSURE ON SURFACE CSG FILLED SURFACE WITH 1 BBL
8/1/2013	7:00	- 10:00	3.00	SUBSPR	37				PERF STG 1)PU 3 1/8 EXP GUN, 23 GM, .36 HOLE SIZE. RIH PERFWELL, AS PER PERF DESIGN. POOH. SWIFW
8/5/2013	6:30	- 6:45	0.25	FRAC	48		P		HSM,
	7:00	- 14:21	7.35	FRAC	36	B	P		REFER TO STIMULATION PJR FOR FLUID, SAND AND CHEMICAL VOLUMES, ALL STAGES WERE PERFORATED ACCORDING TO PERF RECORD IN OPEN WELLS, ALL STAGES WERE STIMULATED TO VENDOR POST JOB REPORT. ALL PLUGS ARE HALIBURTON 8K CBPS FRAC STG #1] WHP=995#, BRK DN PERFS=3846#, @=4.6 BPM, INTIAL ISIP=2627#, FG=.76, FINAL ISIP=2546#, FG=.75, SET PLUG & PERFORATE STG #2 FRAC STG #2] WHP=1204#, BRK DN PERFS=3885#, @=5.0 BPM, INTIAL ISIP=2575#, FG=.76, FINAL ISIP=2671#, FG=.78, SET PLUG & PERFORATE STG #3
8/6/2013	6:30	- 6:45	0.25		48		P		HSM,

Operation Summary Report

Well: NBU 1022-121BS ORANGE

Spud Date: 5/7/2013

Project: UTAH-UINTAH

Site: NBU 1022-121 PAD

Rig Name No: GWS 1/1

Event: COMPLETION

Start Date: 7/30/2013

End Date: 8/9/2013

Active Datum: RKB @5,241.00usft (above Mean Sea Level)

UWI: NE/SE/0/10/S/22/E/12/0/0/26/PM/S/2350/E/0/974/0/0

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	7:08 - 17:00	9.87	FRAC	36	B	P		FRAC STG #3] WHP=946#, BRK DN PERFS=2886#, @=4.4 BPM, INTIAL ISIP=1974#, FG=.70, FINAL ISIP=2440#, FG=.76, SET PLUG & PERFORATE STG #4 FRAC STG #4] WHP=1510#, BRK DN PERFS=2647#, @=4.1 BPM, INTIAL ISIP=1800#, FG=.68, FINAL ISIP=2155#, FG=.73, SET PLUG PERFORATE STG #5 FRAC STG #5] WHP=1095#, BRK DN PERFS=2490#, @=3.6 BPM, INTIAL ISIP=1628#, FG=.67, FINAL ISIP=2181#, FG=.74, SET PLUG AND PERFORATE STG #6
8/7/2013	6:15 - 6:30	0.25		48		P		HSM,
	7:00 - 12:00	5.00	FRAC	36	B	P		FRAC STG #6] WHP=855#, BRK DN PERFS=2073#, @=4.1 BPM, INTIAL ISIP=1593#, FG=.67, FINAL ISIP=2256#, FG=.76, SET PLUG AND PERFORATE STG #7 FRAC STG #7] WHP=123#, BRK DN PERFS=2379#, @=4.4 BPM, INTIAL ISIP=1455#, FG=.69, FINAL ISIP=1455#, FG=.77, SET PLUG AND PERFORATE STG #8 FRAC STG #8] WHP=1128#, BRK DN PERFS=1328#, @=1.0 BPM, INTIAL ISIP=1223#, FG=.66, FINAL ISIP=1648#, FG=.73, SET TOP KILL TOTAL BBLs= 8331 TOTAL SAND= 191501
8/8/2013	6:45 - 7:00	0.25	DRLOUT	48		P		HSM. PINCH POINTS.
	7:00 - 17:00	10.00	DRLOUT	31	I	P		MIRU RIG. SPOT EQUIP. OPEN WELL 0 PSI. NDWH. NU BOP. RU RIG FLOOR & TBG EQUIP. PU 3 7/8 BIT, X-DART, POBS, 1.875 XN-NIPPLE. PREP & TALLY 150 JTS 2 3/8 J-55 & 165 JTS L-80 TBG. RIH W/ 150 JTS J-55 & 25 JT L-80. TAG CBP @ 5514'. RU DRL EQUIP. PSI TEST BOP T/ 3000 PSI. GOOD TEST. BLEED OFF PSI. SWIFN.
8/9/2013	6:45 - 7:00	0.25	DRLOUT	48		P		HSM. POWER SWIVEL

Operation Summary Report

Well: NBU 1022-121BS ORANGE

Spud Date: 5/7/2013

Project: UTAH-UINTAH

Site: NBU 1022-121 PAD

Rig Name No: GWS 1/1

Event: COMPLETION

Start Date: 7/30/2013

End Date: 8/9/2013

Active Datum: RKB @5,241.00usft (above Mean Sea Level)




UWI: NE/SE/0/10/S/22/E/1 2/0/0/26/PM/S/2350/E/0/974/0/0

Date	Time Start-End	Duration (hr)	Phase	Code	Sub Code	P/U	MD From (usft)	Operation
	7:00 - 17:00	10.00	DRLOUT	44	C	P		<p>OPEN WELL 0 PSI. BRK CONV CIRC. BEG DRL OUT. 1st CBP) DRL OUT 10' SAND. DRL OUT CBP @ 5514' IN 8 MIN. 0 PSI INCR. CONT RIH. 2nd CBP) DRL OUT 20' SAND. DRL OUT CBP @ 5711' IN 8 MIN. 200 PSI INCR. CONT RIH. 3rd CBP) DRL OUT 15' SAND. DRL OUT CBP @ 6020' IN 5 MIN. 300 PSI INCR. CONT RIH. 4th CBP) DRL OUT 30' SAND. DRL OUT CBP @ 7050' IN 5 MIN. 300 PSI INCR. CONT RIH. 5th CBP) DRL OUT 125' SAND. DRL OUT CBP @ 7307' IN 8 MIN. 200 PSI INCR. CONT RIH. 6th CBP) DRL OUT 60' SAND. DRL OUT CBP @ 7501' IN 5 MIN. 200 PSI INCR. CONT RIH. 7th CBP) DRL OUT 30' SAND. DRL OUT CBP @ 7753' IN 8 MIN. 300 PSI INCR. CONT RIH. 8th CBP) DRL OUT 15' SAND. DRL OUT CBP @ 8033' IN 10 MIN. 500 PSI INCR. CONT RIH. PBSD) TAG SAND @ 8415'. RD DRL EQUIP. POOH, LD 16 JTS L-80 TBG. PU 4 1/16 TBG HNGR. LAND TBG W/ KB = 19.00 TBG HNGR = .83 94 JTS L-80 TBG = 2987.20 1- 6' L-80 PUP JT = 6.16 150 JTS J-55 TBG = 4743.97 XN-NIPPLE (1.875) = 2.20 EOT @ 7759.36</p> <p>ND BOP. NUWH. DROP BALL. PUMP BIT OFF W/ 2200 PSI. SWI, LET BIT FALL FOR 30 MIN. PSI TEST HAL 9000 LINES T/ 2000 PSI. GOOD TEST. BLEED PSI. OPEN WELL T/ PIT. UNLOAD TBG. TURN WELL T/ FBC. RD RIG. MOVE RIG OVER T/ GREEN WELL.</p> <p>TOTAL LOAD = 8332 BBL RIG RECOVERD = 1535 BBL LEFT T/ RECOVER = 6497 BBL</p>
	17:00 - 17:00	0.00	DRLOUT					<p>WELL TURNED TO SALES @ 1430 HR ON 8/9/2013, 1200 MCFD, 1920 BWPD, FCP 1478#, FTP 1739#, 20/64" CK.</p>

WELL DETAILS: NBU 1022-121BS

GL 5222 & 19 @ 5241.00ft (PIONEER 54)

+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.00	0.00	14516563.60	2093905.04	39.962665	-109.381655

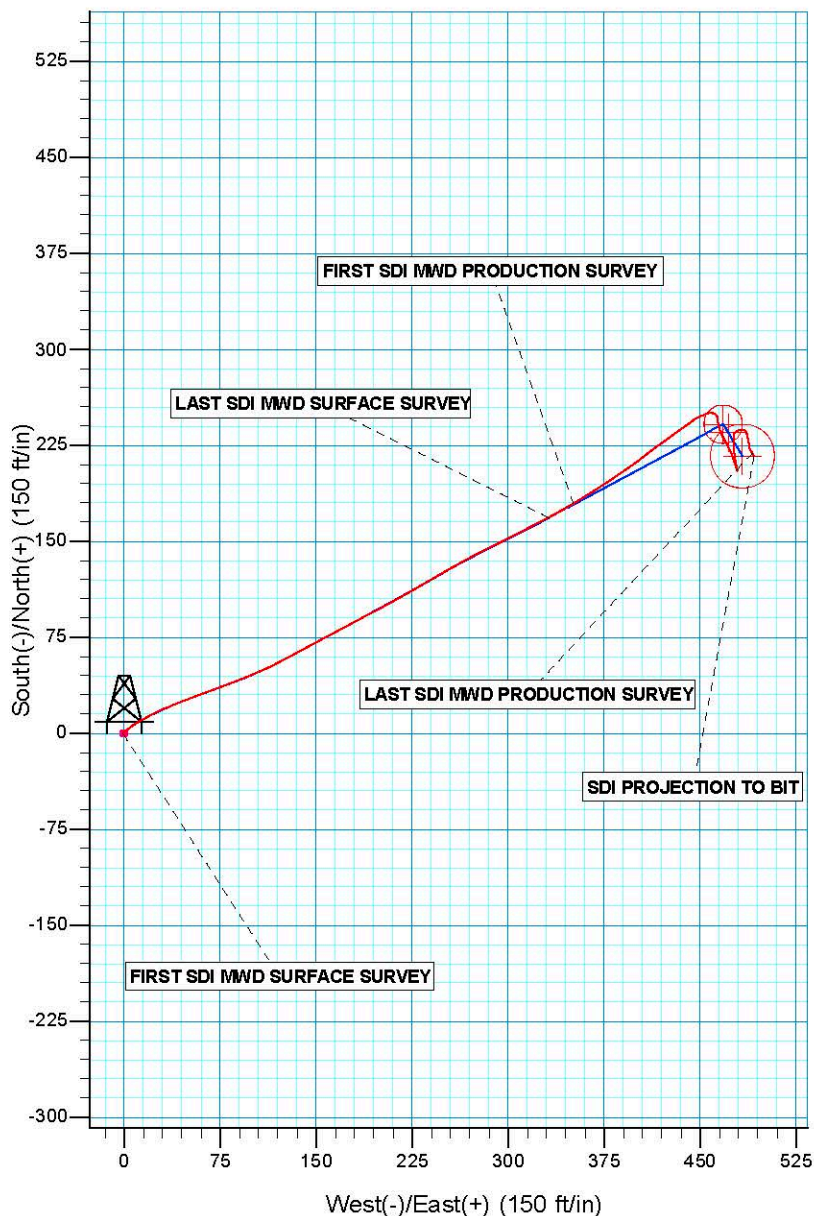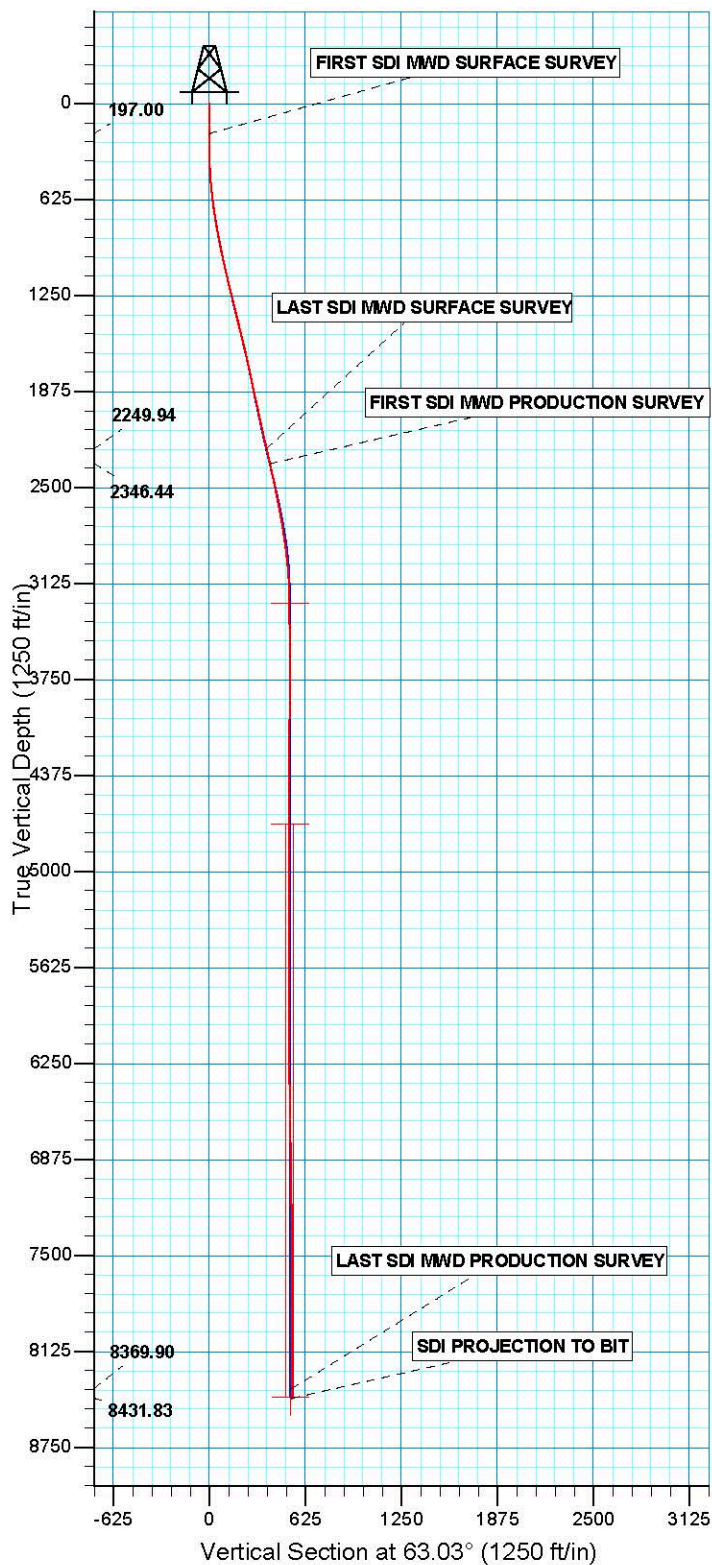

PROJECT DETAILS: UTAH - UTM (feet), NAD27, Zone 12N

Geodetic System: Universal Transverse Mercator (US Survey Feet)
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1866
Zone: Zone 12N (114 W to 108 W)
Location: SECTION 12 T10S R22E
System Datum: Mean Sea Level

Design: OH (NBU 1022-12I1BS/OH)

RECEIVED: Created By: Gabe Kendall Date: 11/20/2013



US ROCKIES REGION PLANNING

UTAH - UTM (feet), NAD27, Zone 12N

NBU 1022-12I PAD

NBU 1022-12I1BS

OH

Design: OH

Standard Survey Report

19 June, 2013





Company:	US ROCKIES REGION PLANNING	Local Co-ordinate Reference:	Well NBU 1022-121BS
Project:	UTAH - UTM (feet), NAD27, Zone 12N	TVD Reference:	GL 5222 & 19 @ 5241.00ft (PIONEER 54)
Site:	NBU 1022-121 PAD	MD Reference:	GL 5222 & 19 @ 5241.00ft (PIONEER 54)
Well:	NBU 1022-121BS	North Reference:	True
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	EDM 5000.1 Single User Db

Project	UTAH - UTM (feet), NAD27, Zone 12N		
Map System:	Universal Transverse Mercator (US Survey Feet)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	Zone 12N (114 W to 108 W)		

Site		NBU 1022-121 PAD, SECTION 12 T10S R22E			
Site Position:		Northing:	14,516,563.60 usft	Latitude:	39.962665
From:	Lat/Long	Easting:	2,093,905.03 usft	Longitude:	-109.381655
Position Uncertainty:	0.00 ft	Slot Radius:	13.200 in	Grid Convergence:	1.04 °

Well	NBU 1022-121BS, 2350 FSL 974 FEL					
Well Position	+N/-S	0.00 ft	Northing:	14,516,563.60 usft	Latitude:	39.962665
	+E/-W	0.00 ft	Easting:	2,093,905.03 usft	Longitude:	-109.381655
Position Uncertainty		0.00 ft	Wellhead Elevation:	ft	Ground Level:	5,222.00 ft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	06/20/13	10.76	65.81	52,123

Design	OH				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)	
	0.00	0.00	0.00	63.03	

Survey Program	Date	06/19/13			
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description	
15.00	2,289.00	Survey #1 SDI MWD SURFACE (OH)	SDI MWD	SDI MWD - Standard ver 1.0.1	
2,388.00	8,486.00	Survey #2 SDI MWD PRODUCTION (OH)	SDI MWD	SDI MWD - Standard ver 1.0.1	

Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
15.00	0.00	0.00	15.00	0.00	0.00	0.00	0.00	0.00	0.00	
197.00	0.62	253.53	197.00	-0.28	-0.94	-0.97	0.34	0.34	0.00	
FIRST SDI MWD SURFACE SURVEY										
284.00	0.50	40.59	283.99	-0.12	-1.15	-1.08	1.24	-0.14	169.03	
371.00	2.28	49.33	370.97	1.29	0.41	0.95	2.05	2.05	10.05	
463.00	3.96	52.18	462.83	4.43	4.31	5.85	1.83	1.83	3.10	
553.00	5.63	57.45	552.51	8.71	10.49	13.30	1.92	1.86	5.86	
643.00	6.95	62.46	641.97	13.61	19.04	23.14	1.59	1.47	5.57	
733.00	8.62	65.62	731.13	18.91	30.01	35.32	1.91	1.86	3.51	



Company:	US ROCKIES REGION PLANNING	Local Co-ordinate Reference:	Well NBU 1022-121BS
Project:	UTAH - UTM (feet), NAD27, Zone 12N	TVD Reference:	GL 5222 & 19 @ 5241.00ft (PIONEER 54)
Site:	NBU 1022-121 PAD	MD Reference:	GL 5222 & 19 @ 5241.00ft (PIONEER 54)
Well:	NBU 1022-121BS	North Reference:	True
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	EDM 5000.1 Single User Db

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
823.00	10.63	69.45	819.86	24.61	43.92	50.31	2.34	2.23	4.26
913.00	11.61	69.57	908.17	30.68	60.18	67.55	1.09	1.09	0.13
1,003.00	12.22	69.49	996.23	37.18	77.59	86.02	0.68	0.68	-0.09
1,093.00	12.93	68.35	1,084.07	44.23	95.87	105.51	0.84	0.79	-1.27
1,183.00	13.89	64.22	1,171.62	52.65	114.96	126.33	1.51	1.07	-4.59
1,273.00	13.81	60.88	1,259.00	62.57	134.07	147.87	0.89	-0.09	-3.71
1,363.00	13.28	62.37	1,346.50	72.59	152.61	168.94	0.71	-0.59	1.66
1,453.00	13.01	61.40	1,434.14	82.24	170.67	189.40	0.39	-0.30	-1.08
1,543.00	13.63	61.93	1,521.72	92.08	188.92	210.13	0.70	0.69	0.59
1,633.00	13.63	61.49	1,609.19	102.13	207.59	231.33	0.12	0.00	-0.49
1,723.00	12.66	61.14	1,696.83	111.95	225.55	251.79	1.08	-1.08	-0.39
1,813.00	12.31	59.29	1,784.70	121.61	242.44	271.22	0.59	-0.39	-2.06
1,903.00	12.22	60.00	1,872.65	131.27	258.93	290.31	0.20	-0.10	0.79
1,993.00	12.13	63.95	1,960.62	140.19	275.68	309.27	0.93	-0.10	4.39
2,083.00	11.81	64.04	2,048.67	148.37	292.45	327.94	0.36	-0.36	0.10
2,173.00	12.22	61.93	2,136.69	156.89	309.14	346.67	0.67	0.46	-2.34
2,263.00	12.66	62.46	2,224.58	165.93	326.29	366.06	0.51	0.49	0.59
2,289.00	12.93	62.11	2,249.94	168.61	331.39	371.81	1.08	1.04	-1.35
LAST SDI MWD SURFACE SURVEY									
2,388.00	12.84	59.10	2,346.44	179.44	350.62	393.86	0.68	-0.09	-3.04
FIRST SDI MWD PRODUCTION SURVEY									
2,483.00	12.57	57.43	2,439.12	190.42	368.38	414.68	0.48	-0.28	-1.76
2,577.00	12.40	55.67	2,530.90	201.62	385.34	434.87	0.44	-0.18	-1.87
2,673.00	10.64	54.09	2,624.96	212.63	401.03	453.85	1.86	-1.83	-1.65
2,768.00	10.20	52.16	2,718.39	222.94	414.78	470.77	0.59	-0.46	-2.03
2,861.00	8.53	54.00	2,810.15	232.04	426.86	485.67	1.82	-1.80	1.98
2,955.00	7.21	54.88	2,903.26	239.53	437.33	498.40	1.41	-1.40	0.94
3,049.00	5.28	55.94	2,996.70	245.35	445.73	508.53	2.06	-2.05	1.13
3,144.00	3.17	71.23	3,091.44	248.64	451.84	515.47	2.50	-2.22	16.09
3,237.00	2.02	67.89	3,184.34	250.09	455.80	519.65	1.25	-1.24	-3.59
3,331.00	0.70	90.21	3,278.31	250.71	457.91	521.81	1.49	-1.40	23.74
3,424.00	1.14	108.67	3,371.30	250.41	459.35	522.96	0.56	0.47	19.85
3,518.00	0.70	112.45	3,465.29	249.89	460.77	523.99	0.47	-0.47	4.02
3,613.00	1.06	133.19	3,560.28	249.07	461.94	524.66	0.50	0.38	21.83
3,708.00	0.88	148.93	3,655.27	247.84	462.96	525.01	0.34	-0.19	16.57
3,804.00	1.23	173.18	3,751.25	246.19	463.46	524.71	0.58	0.36	25.26
3,896.00	1.32	178.02	3,843.23	244.15	463.62	523.92	0.15	0.10	5.26
3,989.00	1.32	164.75	3,936.20	242.05	463.94	523.25	0.33	0.00	-14.27
4,084.00	1.49	165.01	4,031.17	239.80	464.54	522.78	0.18	0.18	0.27
4,178.00	1.49	159.47	4,125.14	237.47	465.29	522.39	0.15	0.00	-5.89
4,273.00	1.41	160.00	4,220.11	235.22	466.12	522.10	0.09	-0.08	0.56
4,368.00	1.41	153.67	4,315.08	233.07	467.04	521.95	0.16	0.00	-6.66
4,463.00	0.62	141.45	4,410.07	231.62	467.88	522.04	0.86	-0.83	-12.86



Company:	US ROCKIES REGION PLANNING	Local Co-ordinate Reference:	Well NBU 1022-121BS
Project:	UTAH - UTM (feet), NAD27, Zone 12N	TVD Reference:	GL 5222 & 19 @ 5241.00ft (PIONEER 54)
Site:	NBU 1022-121 PAD	MD Reference:	GL 5222 & 19 @ 5241.00ft (PIONEER 54)
Well:	NBU 1022-121BS	North Reference:	True
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	EDM 5000.1 Single User Db

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,558.00	0.70	158.07	4,505.06	230.68	468.42	522.09	0.22	0.08	17.49
4,653.00	0.79	152.00	4,600.05	229.56	468.94	522.05	0.13	0.09	-6.39
4,747.00	0.79	156.22	4,694.04	228.40	469.51	522.03	0.06	0.00	4.49
4,842.00	0.53	152.44	4,789.04	227.41	469.97	522.00	0.28	-0.27	-3.98
4,937.00	0.79	162.81	4,884.03	226.40	470.37	521.89	0.30	0.27	10.92
5,032.00	0.70	154.46	4,979.02	225.25	470.81	521.77	0.15	-0.09	-8.79
5,127.00	0.97	144.79	5,074.01	224.07	471.53	521.87	0.32	0.28	-10.18
5,221.00	0.97	154.29	5,168.00	222.70	472.33	521.96	0.17	0.00	10.11
5,317.00	1.23	149.10	5,263.98	221.08	473.21	522.02	0.29	0.27	-5.41
5,408.00	1.41	154.02	5,354.96	219.24	474.20	522.06	0.23	0.20	5.41
5,503.00	1.67	160.79	5,449.92	216.88	475.17	521.86	0.33	0.27	7.13
5,598.00	1.49	165.89	5,544.89	214.37	475.93	521.39	0.24	-0.19	5.37
5,692.00	1.58	161.67	5,638.85	211.96	476.63	520.93	0.15	0.10	-4.49
5,784.00	1.76	161.05	5,730.81	209.42	477.49	520.54	0.20	0.20	-0.67
5,879.00	1.76	158.33	5,825.77	206.68	478.50	520.20	0.09	0.00	-2.86
5,973.00	0.62	173.89	5,919.75	204.84	479.09	519.89	1.25	-1.21	16.55
6,067.00	1.14	340.79	6,013.74	205.21	478.84	519.83	1.86	0.55	177.55
6,161.00	2.55	354.33	6,107.69	208.18	478.32	520.72	1.56	1.50	14.40
6,256.00	2.46	347.91	6,202.60	212.27	477.69	522.01	0.31	-0.09	-6.76
6,350.00	2.29	351.51	6,296.52	216.10	476.99	523.12	0.24	-0.18	3.83
6,443.00	1.93	352.30	6,389.46	219.49	476.50	524.23	0.39	-0.39	0.85
6,537.00	1.67	359.69	6,483.41	222.43	476.28	525.37	0.37	-0.28	7.86
6,632.00	1.23	0.30	6,578.38	224.84	476.28	526.45	0.46	-0.46	0.64
6,727.00	1.93	352.66	6,673.34	227.44	476.08	527.46	0.77	0.74	-8.04
6,821.00	1.58	1.71	6,767.30	230.31	475.92	528.61	0.47	-0.37	9.63
6,914.00	1.14	9.62	6,860.27	232.50	476.11	529.78	0.51	-0.47	8.51
7,007.00	1.14	20.43	6,953.26	234.28	476.59	531.01	0.23	0.00	11.62
7,101.00	0.79	42.05	7,047.24	235.64	477.35	532.30	0.53	-0.37	23.00
7,194.00	0.70	70.26	7,140.23	236.31	478.31	533.47	0.40	-0.10	30.33
7,287.00	0.79	76.85	7,233.23	236.64	479.47	534.65	0.13	0.10	7.09
7,382.00	0.97	79.84	7,328.22	236.93	480.90	536.06	0.20	0.19	3.15
7,477.00	0.88	80.55	7,423.20	237.20	482.41	537.52	0.10	-0.09	0.75
7,570.00	0.53	86.96	7,516.20	237.34	483.55	538.60	0.39	-0.38	6.89
7,665.00	0.53	118.87	7,611.19	237.15	484.37	539.25	0.31	0.00	33.59
7,760.00	0.62	140.75	7,706.19	236.54	485.08	539.60	0.25	0.09	23.03
7,854.00	1.06	147.08	7,800.18	235.41	485.88	539.80	0.48	0.47	6.73
7,949.00	1.23	171.69	7,895.16	233.67	486.50	539.57	0.54	0.18	25.91
8,044.00	1.41	173.01	7,990.13	231.50	486.79	538.84	0.19	0.19	1.39
8,139.00	1.67	165.27	8,085.10	229.00	487.28	538.15	0.35	0.27	-8.15
8,234.00	2.11	170.19	8,180.05	225.94	487.93	537.34	0.49	0.46	5.18
8,329.00	2.02	163.69	8,274.99	222.61	488.70	536.51	0.26	-0.09	-6.84
8,424.00	2.73	148.57	8,369.90	219.07	490.35	536.38	0.99	0.75	-15.92
LAST SDI MWD PRODUCTION SURVEY									
8,486.00	2.73	148.57	8,431.83	216.55	491.89	536.61	0.00	0.00	0.00



Company:	US ROCKIES REGION PLANNING	Local Co-ordinate Reference:	Well NBU 1022-121BS
Project:	UTAH - UTM (feet), NAD27, Zone 12N	TVD Reference:	GL 5222 & 19 @ 5241.00ft (PIONEER 54)
Site:	NBU 1022-121 PAD	MD Reference:	GL 5222 & 19 @ 5241.00ft (PIONEER 54)
Well:	NBU 1022-121BS	North Reference:	True
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	EDM 5000.1 Single User Db

Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
SDI PROJECTION TO BIT									

Design Annotations				
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
197.00	197.00	-0.28	-0.94	FIRST SDI MWD SURFACE SURVEY
2,289.00	2,249.94	168.61	331.39	LAST SDI MWD SURFACE SURVEY
2,388.00	2,346.44	179.44	350.62	FIRST SDI MWD PRODUCTION SURVEY
8,424.00	8,369.90	219.07	490.35	LAST SDI MWD PRODUCTION SURVEY
8,486.00	8,431.83	216.55	491.89	SDI PROJECTION TO BIT

Checked By: _____ Approved By: _____ Date: _____