

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL						1. WELL NAME and NUMBER GMBU I-31-8-18				
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>						3. FIELD OR WILDCAT MONUMENT BUTTE				
4. TYPE OF WELL Oil Well Coalbed Methane Well: NO						5. UNIT or COMMUNITIZATION AGREEMENT NAME GMBU (GRRV)				
6. NAME OF OPERATOR NEWFIELD PRODUCTION COMPANY						7. OPERATOR PHONE 435 646-4825				
8. ADDRESS OF OPERATOR Rt 3 Box 3630 , Myton, UT, 84052						9. OPERATOR E-MAIL mcrozier@newfield.com				
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) UTU-74872			11. MINERAL OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>			12. SURFACE OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>				
13. NAME OF SURFACE OWNER (if box 12 = 'fee')						14. SURFACE OWNER PHONE (if box 12 = 'fee')				
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')						16. SURFACE OWNER E-MAIL (if box 12 = 'fee')				
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')			18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>			19. SLANT VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/>				
20. LOCATION OF WELL		FOOTAGES		QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN		
LOCATION AT SURFACE		989 FNL 664 FEL		NENE	31	8.0 S	18.0 E	S		
Top of Uppermost Producing Zone		1361 FNL 1123 FEL		NENE	31	8.0 S	18.0 E	S		
At Total Depth		1646 FNL 1507 FEL		SWNE	31	8.0 S	18.0 E	S		
21. COUNTY UINTAH			22. DISTANCE TO NEAREST LEASE LINE (Feet) 994			23. NUMBER OF ACRES IN DRILLING UNIT 20				
			25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 771			26. PROPOSED DEPTH MD: 6639 TVD: 6540				
27. ELEVATION - GROUND LEVEL 5100			28. BOND NUMBER WYB000493			29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 437478				
Hole, Casing, and Cement Information										
String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement	Sacks	Yield	Weight
Surf	12.25	8.625	0 - 300	24.0	J-55 ST&C	8.3	Class G	138	1.17	15.8
Prod	7.875	5.5	0 - 6639	15.5	J-55 LT&C	8.3	Premium Lite High Strength	321	3.26	11.0
							50/50 Poz	363	1.24	14.3
ATTACHMENTS										
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES										
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER					<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN					
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)					<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER					
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)					<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP					
NAME Mandie Crozier			TITLE Regulatory Tech			PHONE 435 646-4825				
SIGNATURE			DATE 04/30/2012			EMAIL mcrozier@newfield.com				
API NUMBER ASSIGNED 43047525980000			APPROVAL			 Permit Manager				

NEWFIELD PRODUCTION COMPANY
 GMBU I-31-8-18
 AT SURFACE: NE/NE SECTION 31, T8S R18E
 UINTAH COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0' – 1740'
Green River	1740'
Wasatch	6375'
Proposed TD	6639'

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation (Oil)	1740' – 6375'
-----------------------------	---------------

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO ₃) (mg/l)
Dissolved Bicarbonate (NaHCO ₃) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO ₄) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. **PROPOSED CASING PROGRAM**

a. Casing Design: GMBU I-31-8-18

Size	Interval		Weight	Grade	Coupling	Design Factors		
	Top	Bottom				Burst	Collapse	Tension
Surface casing 8-5/8"	0'	300'	24.0	J-55	STC	2,950 17.53	1,370 14.35	244,000 33.89
Prod casing 5-1/2"	0'	6,639'	15.5	J-55	LTC	4,810 2.28	4,040 1.91	217,000 2.11

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe =	13.0 ppg
Pore pressure at surface casing shoe =	8.33 ppg
Pore pressure at prod casing shoe =	8.33 ppg
Gas gradient =	0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. Cementing Design: GMBU I-31-8-18

Job	Fill	Description	Sacks	OH Excess*	Weight (ppg)	Yield (ft ³ /sk)
			ft ³			
Surface casing	300'	Class G w/ 2% CaCl	138	30%	15.8	1.17
			161			
Prod casing Lead	4,639'	Prem Lite II w/ 10% gel + 3% KCl	321	30%	11.0	3.26
			1045			
Prod casing Tail	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363	30%	14.3	1.24
			451			

*Actual volume pumped will be 15% over the caliper log

- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours

- Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to ± 300 feet will be drilled with an air/mist system. The air rig is equipped with a 6 1/2" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about ± 300 feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 300' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated


bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the third quarter of 2012, and take approximately seven (7) days from spud to rig release.


T8S, R18E, S.L.B.&M.

NEWFIELD EXPLORATION COMPANY

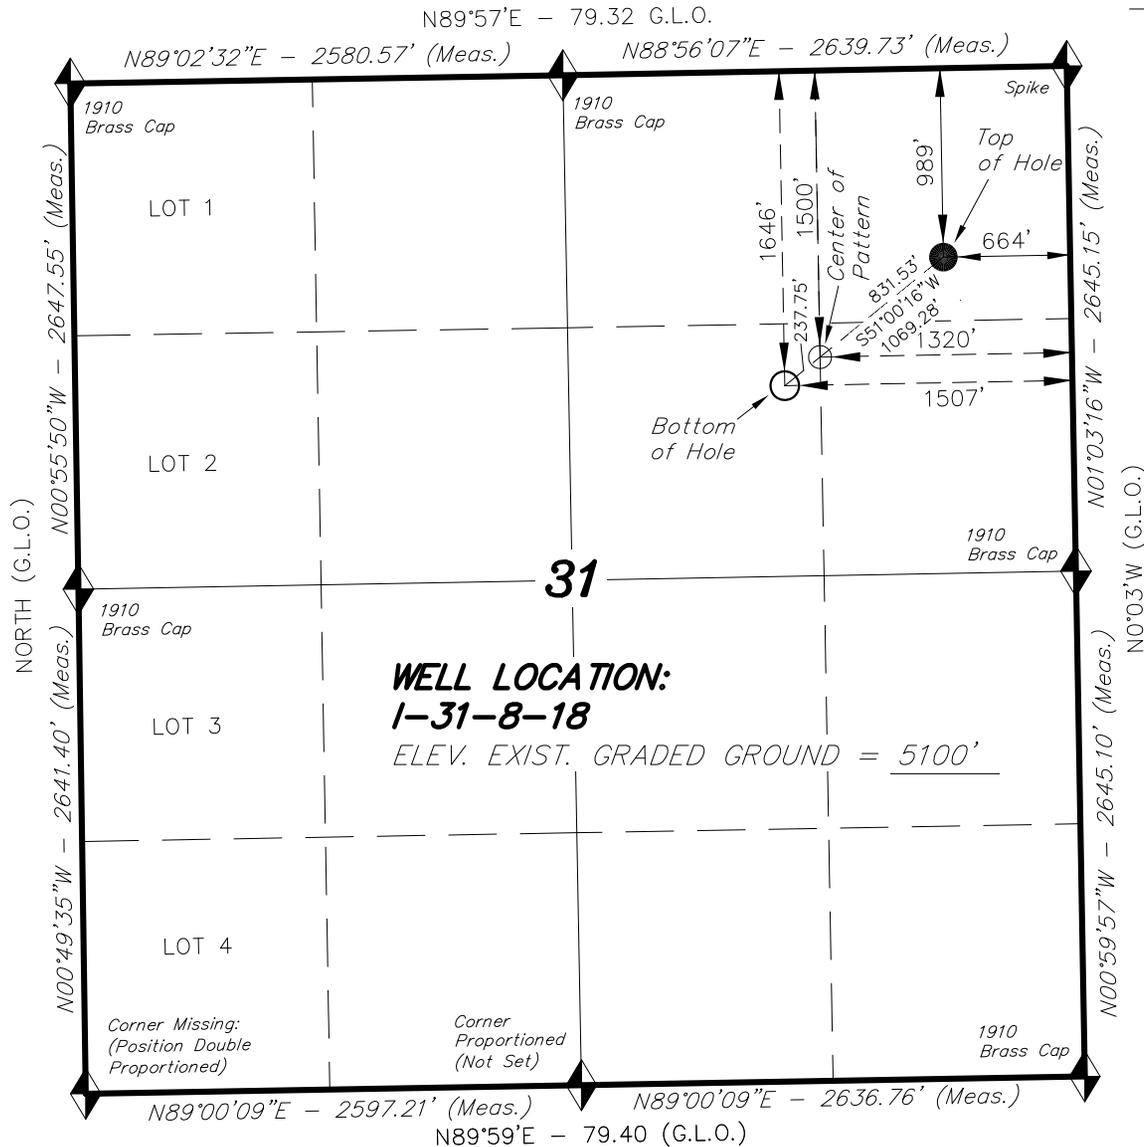

WELL LOCATION, I-31-8-18, LOCATED AS SHOWN IN THE NE 1/4 NE 1/4 OF SECTION 31, T8S, R18E, S.L.B.&M. UINTAH COUNTY, UTAH.

TARGET BOTTOM HOLE, I-31-8-18, LOCATED AS SHOWN IN THE SW 1/4 NE 1/4 OF SECTION 31, T8S, R18E, S.L.B.&M. UINTAH COUNTY, UTAH.

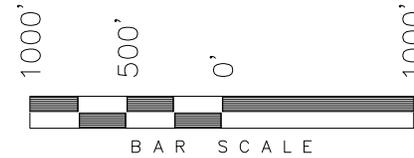

NOTES:

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

REGISTERED LAND SURVEYOR
 REGISTRATION No. 189377
 STATE OF UTAH

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV; Elevations are based on an N.G.S. OPUS Correction. LOCATION: LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'


I-31-8-18
 (Surface Location) NAD 83
 LATITUDE = 40° 04' 44.30"
 LONGITUDE = 109° 55' 45.12"

TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501

DATE SURVEYED: 08-05-11	SURVEYED BY: K.S.	VERSION:
DATE DRAWN: 08-24-11	DRAWN BY: F.T.M.	V1
REVISED:	SCALE: 1" = 1000'	

Access Road Map

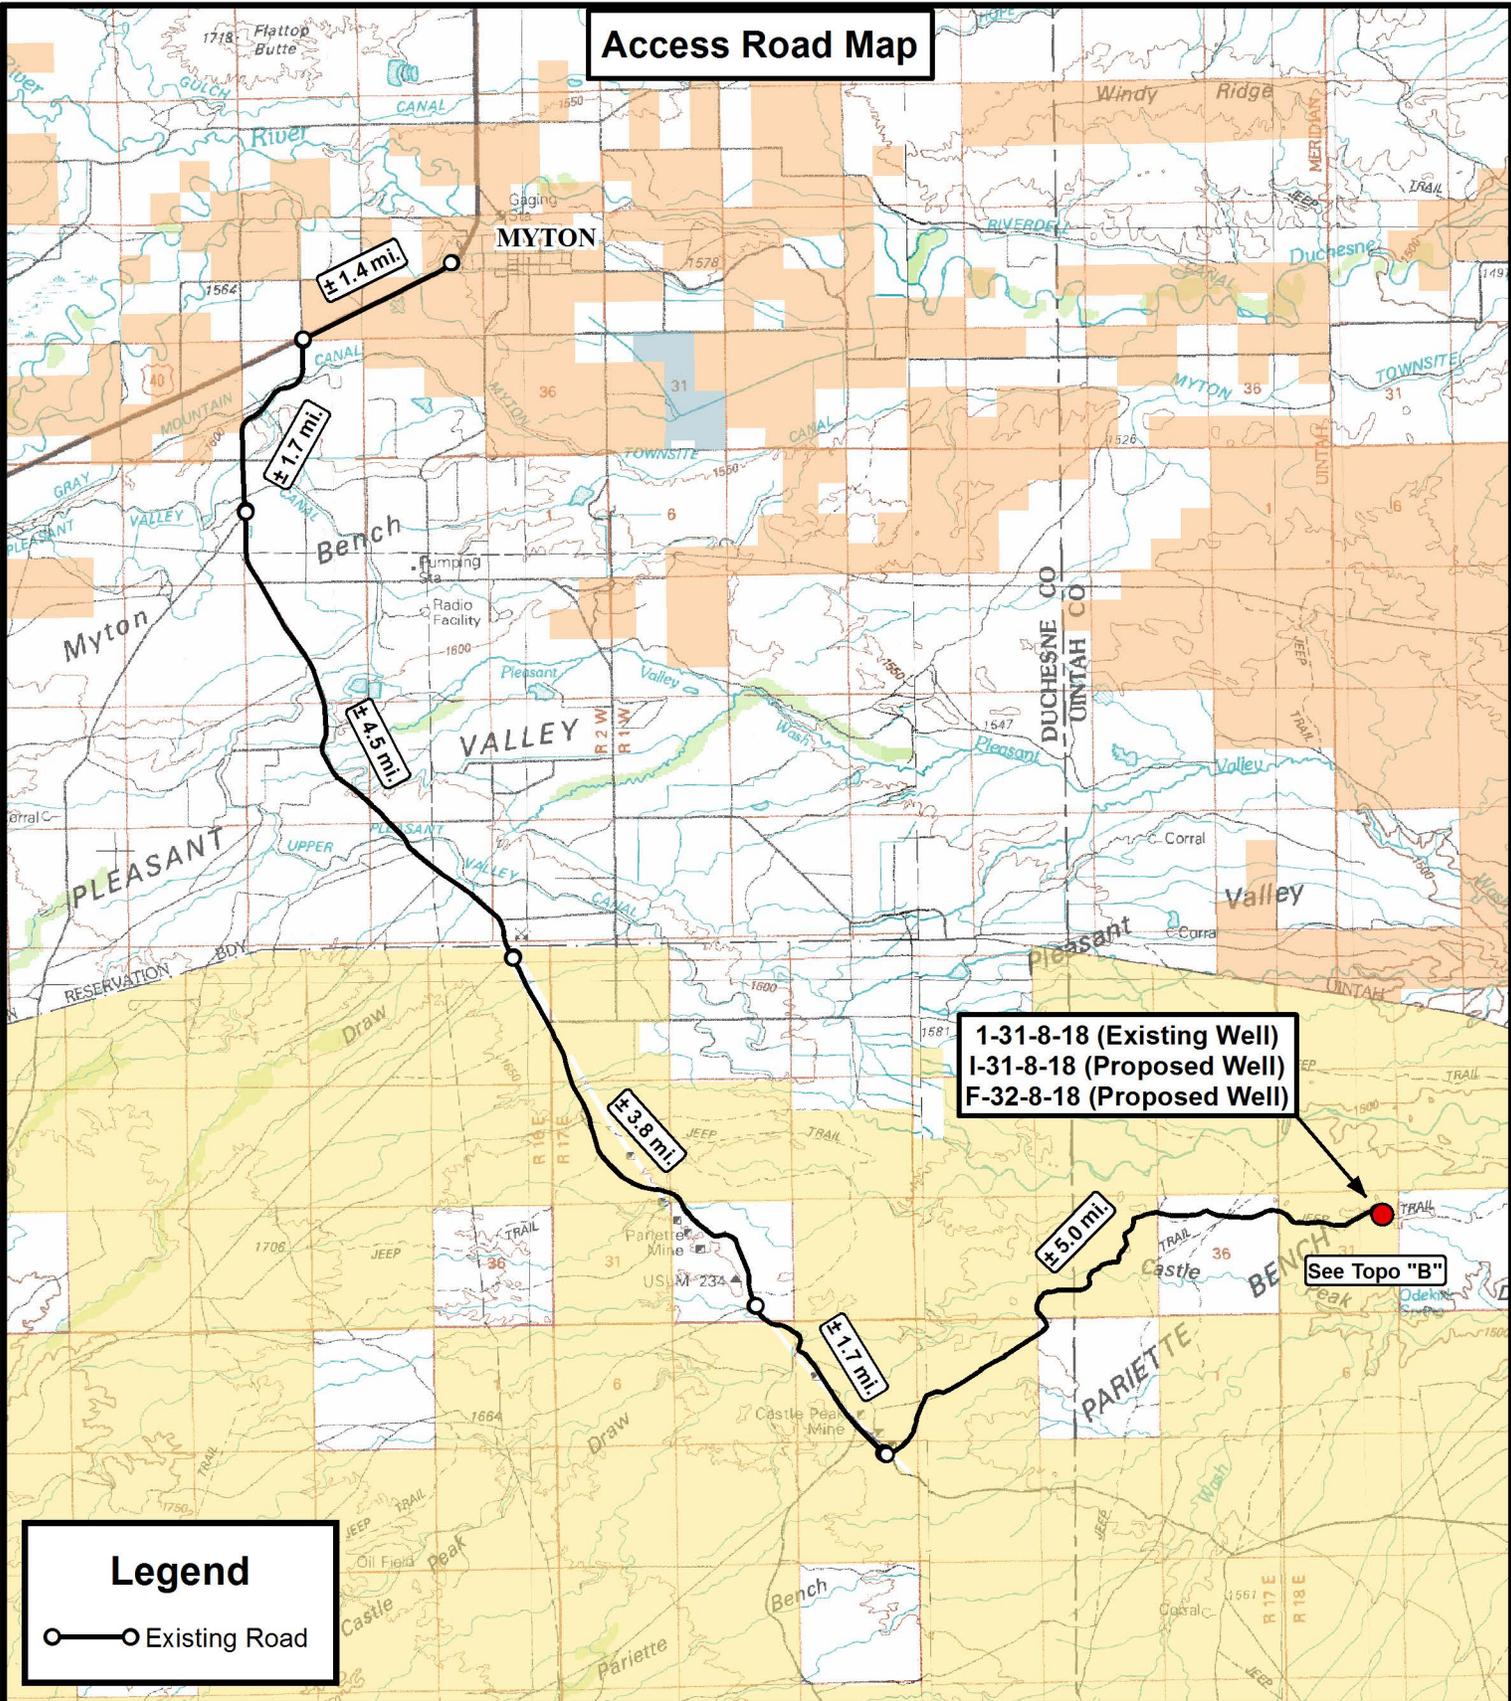

1-31-8-18 (Existing Well)
 I-31-8-18 (Proposed Well)
 F-32-8-18 (Proposed Well)

See Topo "B"

Legend

○—○ Existing Road

Tri State Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
 F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY


1-31-8-18 (Existing Well)
 I-31-8-18 (Proposed Well)
 F-32-8-18 (Proposed Well)
 SEC. 31, T8S, R18E, S.L.B.&M. Uintah County, UT.

DRAWN BY:	D.C.R.	REVISED:	VERSION:
DATE:	08-29-2011		V1
SCALE:	1:100,000		

TOPOGRAPHIC MAP

SHEET
A

Access Road Map

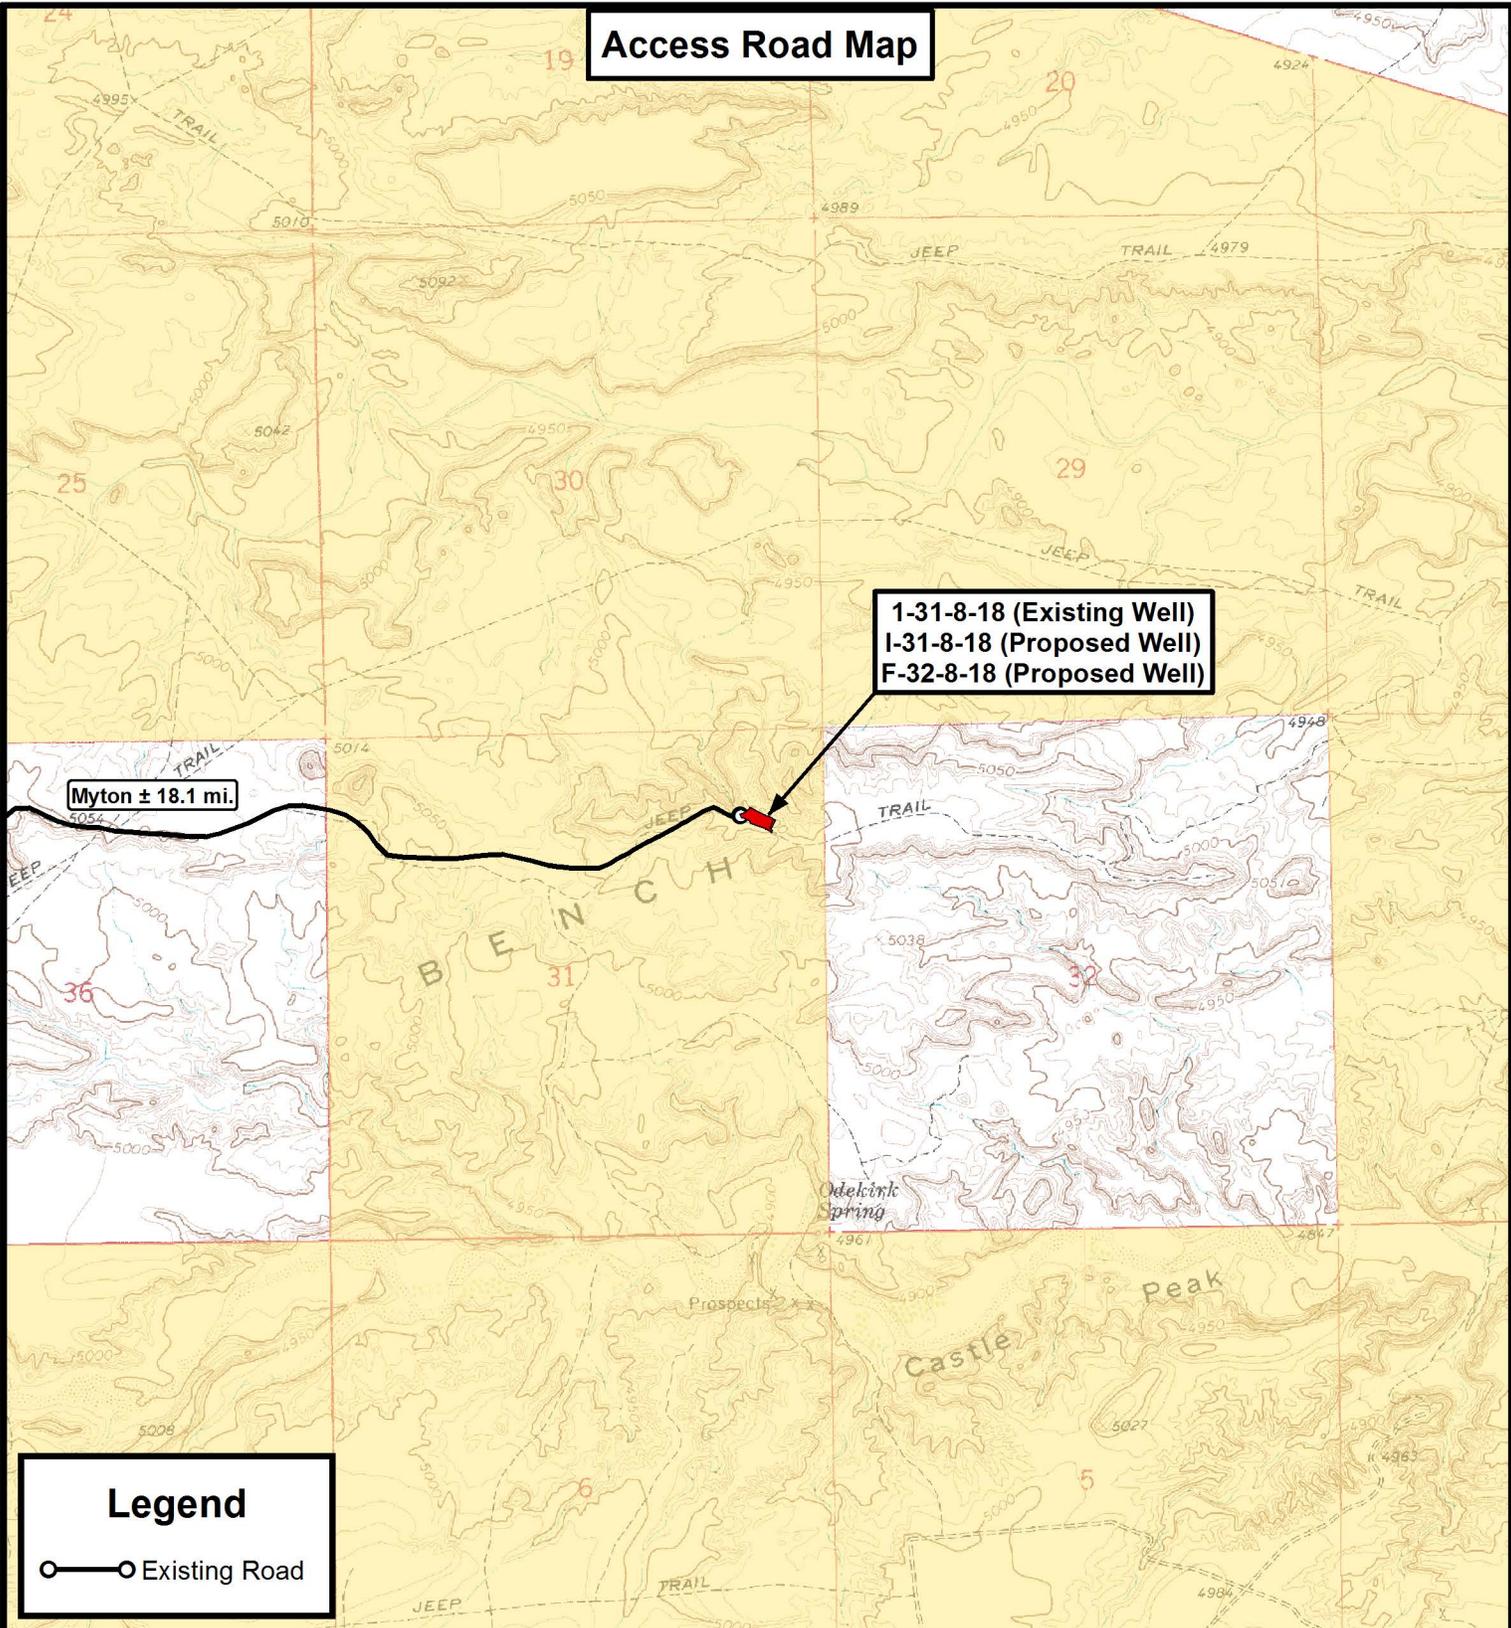

**Tri State
Land Surveying, Inc.**
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY


1-31-8-18 (Existing Well)
I-31-8-18 (Proposed Well)
F-32-8-18 (Proposed Well)
SEC. 31, T8S, R18E, S.L.B.&M. Uintah County, UT.

DRAWN BY:	D.C.R.	REVISED:	VERSION:
DATE:	08-29-2011		V1
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET
B

Proposed Pipeline Map

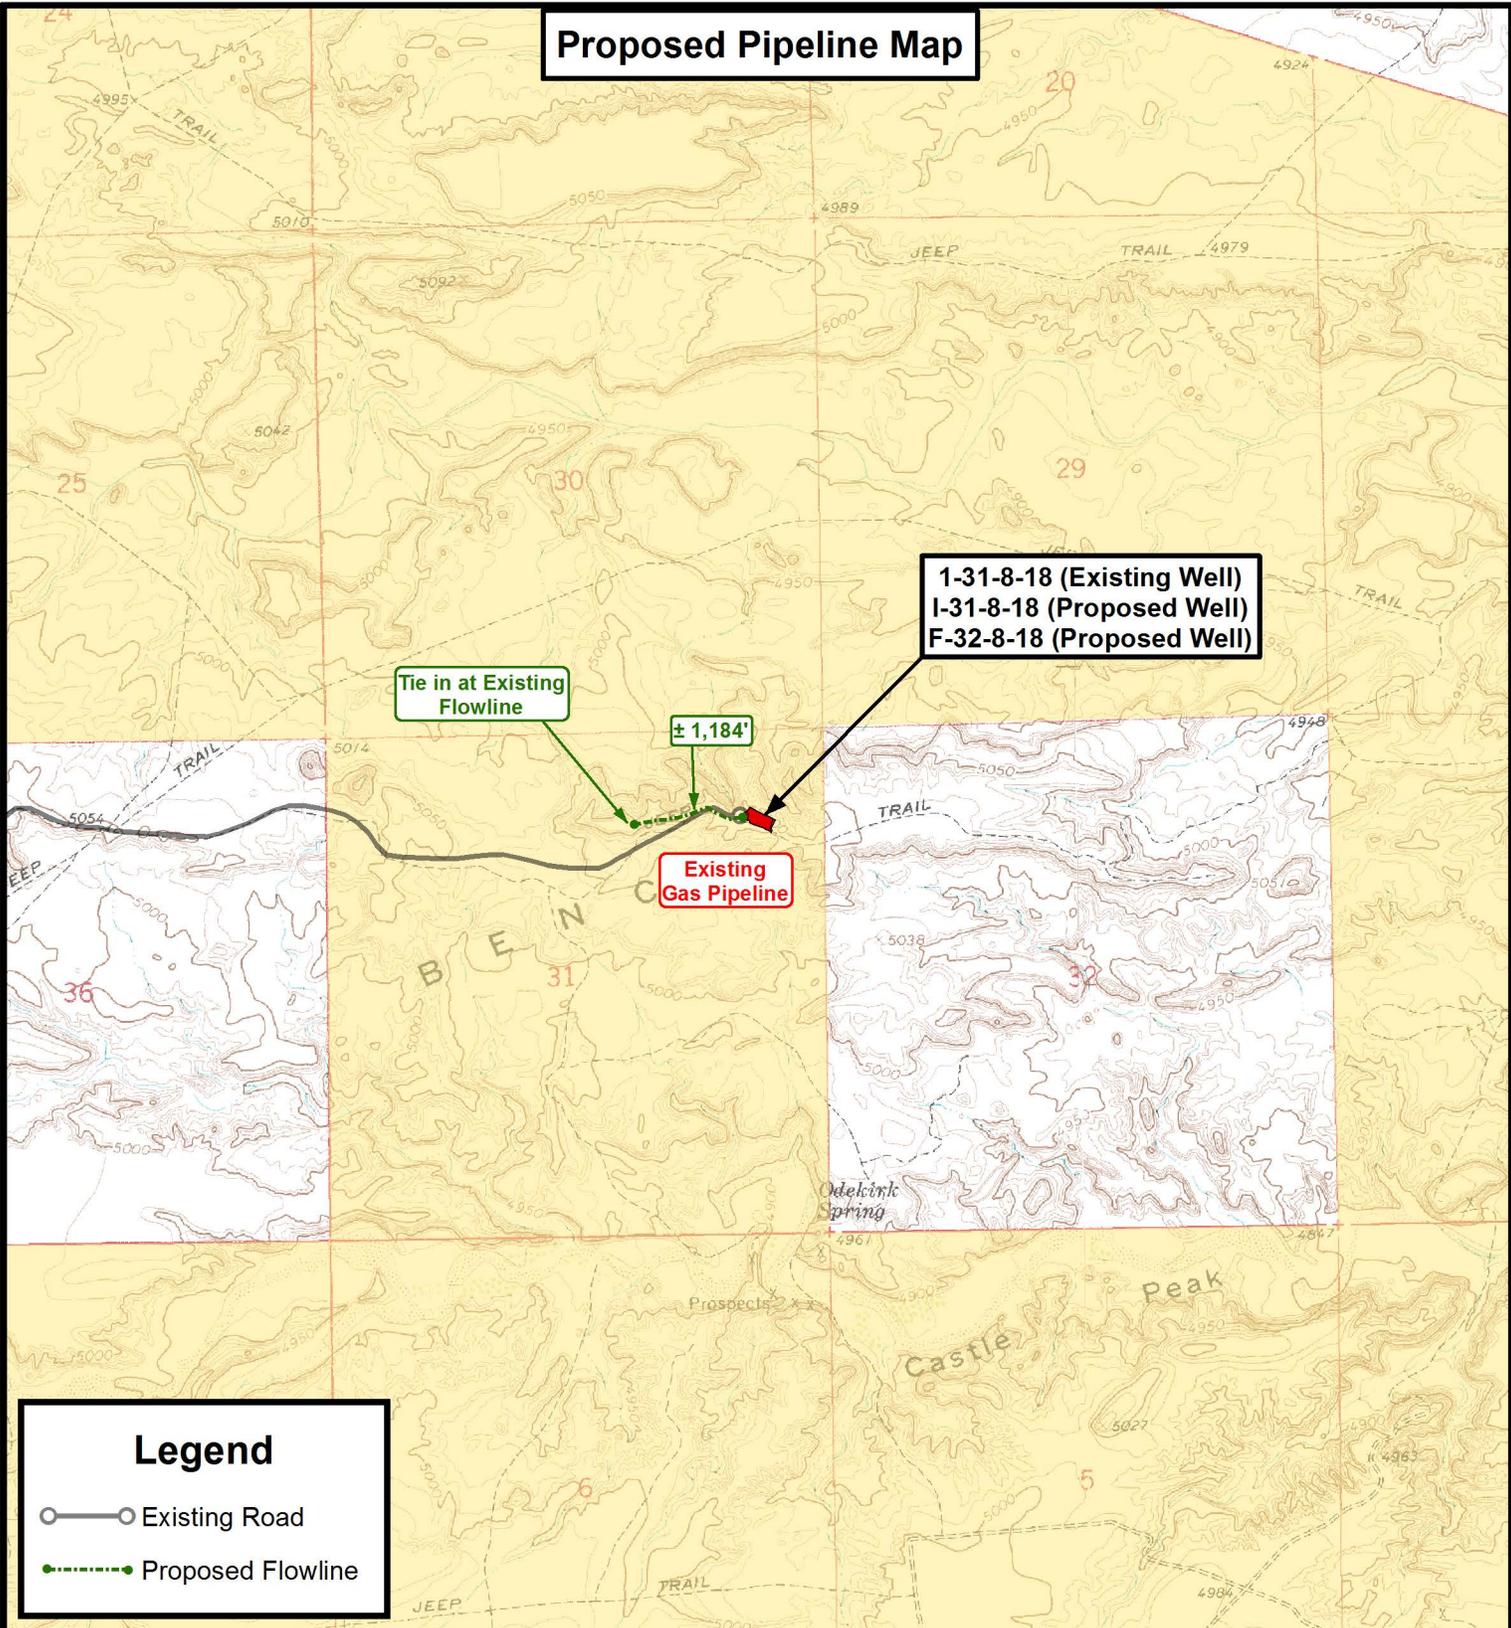

Tie in at Existing Flowline

± 1,184'

Existing Gas Pipeline

1-31-8-18 (Existing Well)
I-31-8-18 (Proposed Well)
F-32-8-18 (Proposed Well)

Legend

- Existing Road
- Proposed Flowline

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

Tri State Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

1-31-8-18 (Existing Well)
I-31-8-18 (Proposed Well)
F-32-8-18 (Proposed Well)
SEC. 31, T8S, R18E, S.L.B.&M. Uintah County, UT.


DRAWN BY:	D.C.R.	REVISED:	VERSION:
DATE:	08-29-2011		V1
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET **C**

Exhibit "B" Map

1-31-8-18 (Existing Well)
 I-31-8-18 (Proposed Well)
 F-32-8-18 (Proposed Well)

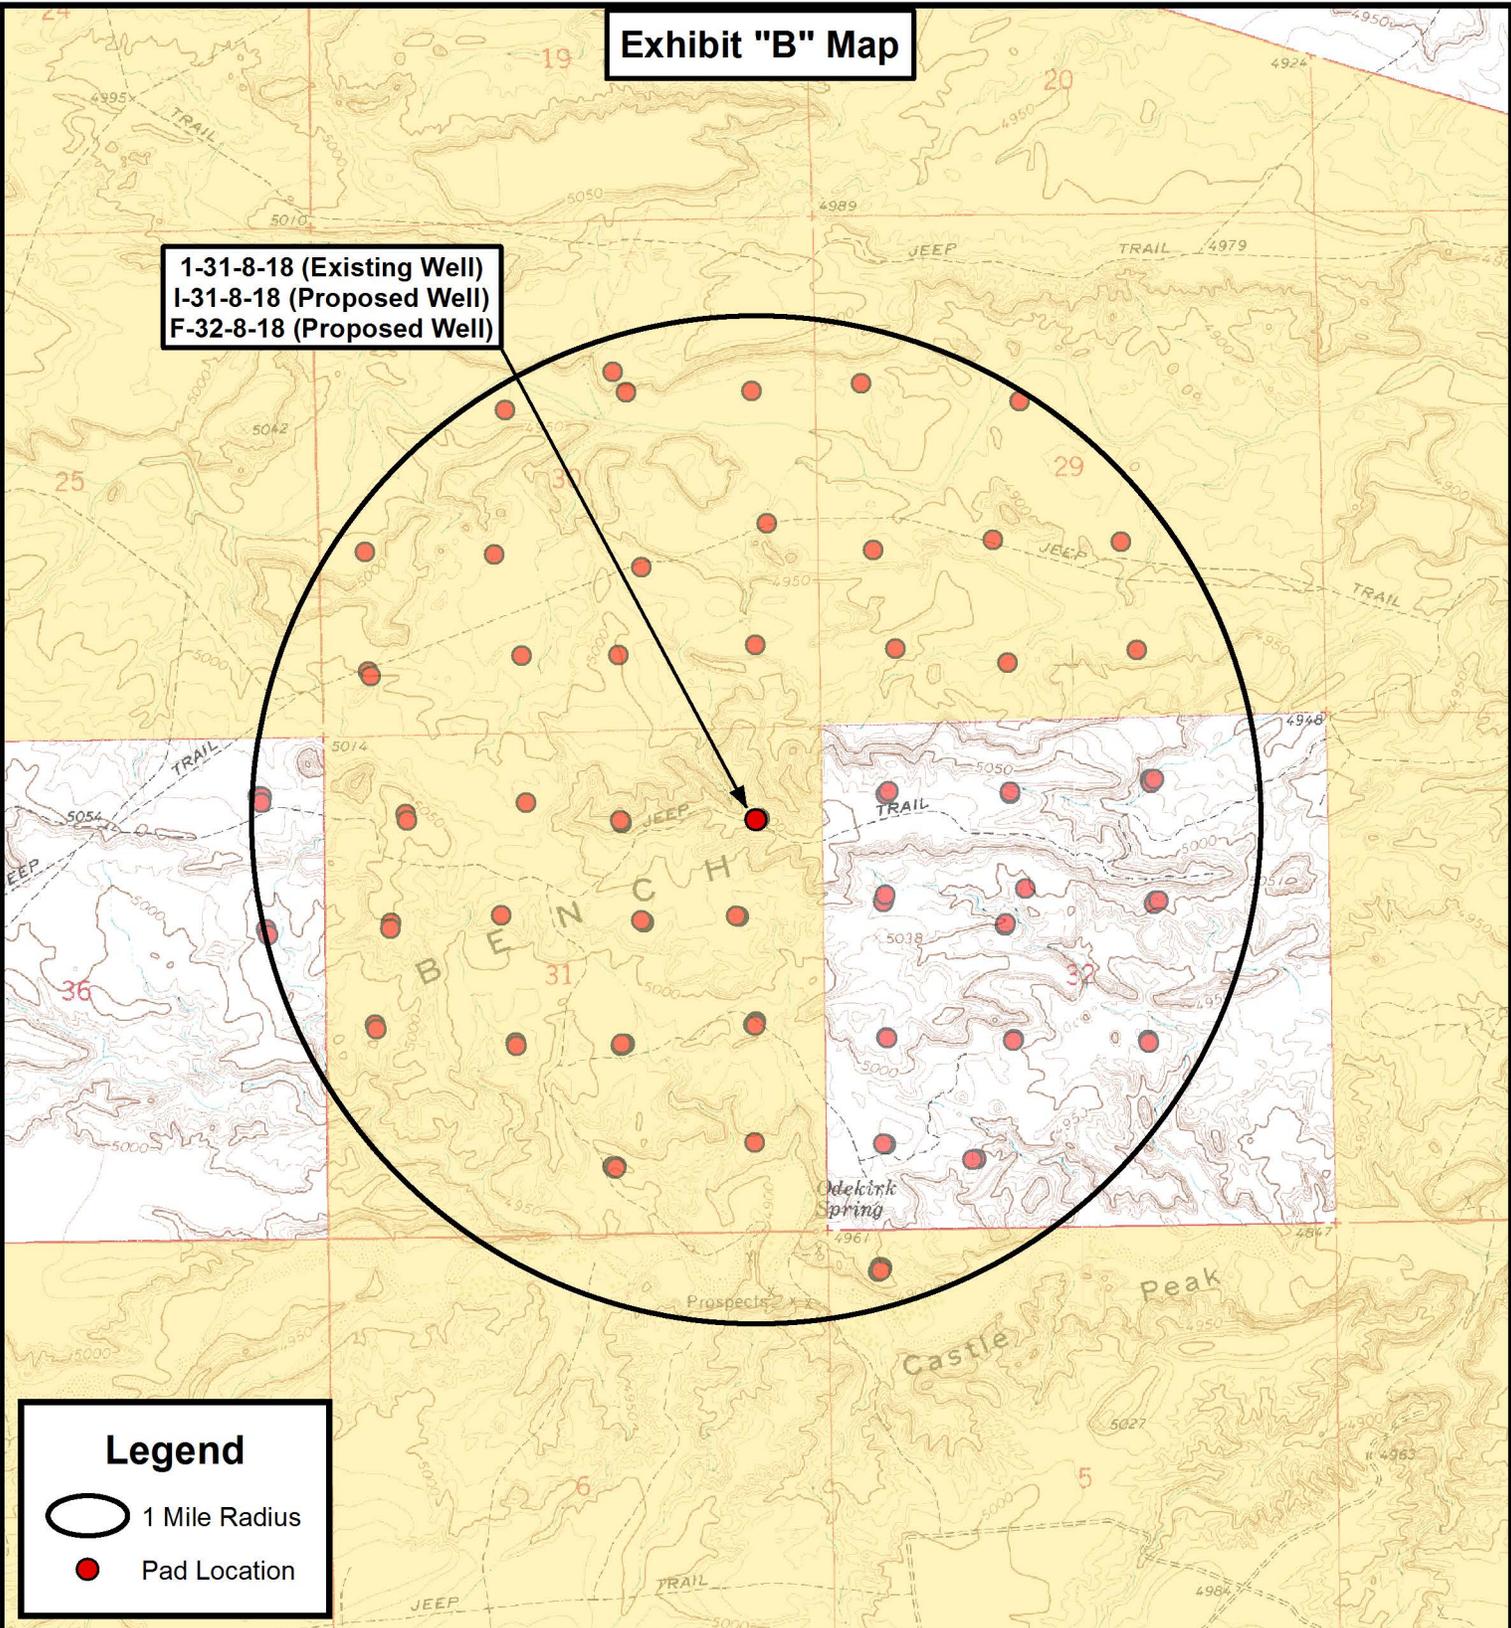

Legend


-  1 Mile Radius
-  Pad Location

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.



**Tri State
 Land Surveying, Inc.**
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
 F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

1-31-8-18 (Existing Well)
 I-31-8-18 (Proposed Well)
 F-32-8-18 (Proposed Well)
 SEC. 31, T8S, R18E, S.L.B.&M. Uintah County, UT.

DRAWN BY:	D.C.R.	REVISED:	VERSION:
DATE:	08-29-2011		V1
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET **D**



NEWFIELD EXPLORATION

**USGS Myton SW (UT)
SECTION 31 T8S, R18E
I-31-8-18**

Wellbore #1

Plan: Design #1

Standard Planning Report

16 August, 2011





PayZone Directional Services, LLC.

Planning Report



Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well I-31-8-18
Company:	NEWFIELD EXPLORATION	TVD Reference:	I-31-8-18 @ 5112.0ft (Newfield Rig)
Project:	USGS Myton SW (UT)	MD Reference:	I-31-8-18 @ 5112.0ft (Newfield Rig)
Site:	SECTION 31 T8S, R18E	North Reference:	True
Well:	I-31-8-18	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Utah Central Zone		

Site	SECTION 31 T8S, R18E				
Site Position:		Northing:	7,201,349.38 ft	Latitude:	40° 4' 44.300 N
From:	Lat/Long	Easting:	2,079,946.45 ft	Longitude:	109° 55' 44.860 W
Position Uncertainty:	0.0 ft	Slot Radius:	"	Grid Convergence:	1.01 °

Well	I-31-8-18, SHL LAT: 40 04 44.30 LONG: -109 55 45.12					
Well Position	+N/-S	0.0 ft	Northing:	7,201,349.01 ft	Latitude:	40° 4' 44.300 N
	+E/-W	-20.2 ft	Easting:	2,079,926.24 ft	Longitude:	109° 55' 45.120 W
Position Uncertainty		0.0 ft	Wellhead Elevation:	5,112.0 ft	Ground Level:	5,100.0 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	2011/08/16	11.24	65.85	52,294

Design	Design #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.0	0.0	0.0	231.00

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,323.5	10.85	231.00	1,319.2	-43.0	-53.1	1.50	1.50	0.00	231.00	
5,376.8	10.85	231.00	5,300.0	-523.3	-646.2	0.00	0.00	0.00	0.00	I-31-8-18 TGT
6,639.4	10.85	231.00	6,540.0	-672.9	-831.0	0.00	0.00	0.00	0.00	



PayZone Directional Services, LLC.

Planning Report



Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well I-31-8-18
Company:	NEWFIELD EXPLORATION	TVD Reference:	I-31-8-18 @ 5112.0ft (Newfield Rig)
Project:	USGS Myton SW (UT)	MD Reference:	I-31-8-18 @ 5112.0ft (Newfield Rig)
Site:	SECTION 31 T8S, R18E	North Reference:	True
Well:	I-31-8-18	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	1.50	231.00	700.0	-0.8	-1.0	1.3	1.50	1.50	0.00
800.0	3.00	231.00	799.9	-3.3	-4.1	5.2	1.50	1.50	0.00
900.0	4.50	231.00	899.7	-7.4	-9.2	11.8	1.50	1.50	0.00
1,000.0	6.00	231.00	999.3	-13.2	-16.3	20.9	1.50	1.50	0.00
1,100.0	7.50	231.00	1,098.6	-20.6	-25.4	32.7	1.50	1.50	0.00
1,200.0	9.00	231.00	1,197.5	-29.6	-36.5	47.0	1.50	1.50	0.00
1,300.0	10.50	231.00	1,296.1	-40.3	-49.7	64.0	1.50	1.50	0.00
1,323.5	10.85	231.00	1,319.2	-43.0	-53.1	68.3	1.50	1.50	0.00
1,400.0	10.85	231.00	1,394.3	-52.1	-64.3	82.7	0.00	0.00	0.00
1,500.0	10.85	231.00	1,492.5	-63.9	-78.9	101.5	0.00	0.00	0.00
1,600.0	10.85	231.00	1,590.7	-75.8	-93.6	120.4	0.00	0.00	0.00
1,700.0	10.85	231.00	1,688.9	-87.6	-108.2	139.2	0.00	0.00	0.00
1,800.0	10.85	231.00	1,787.2	-99.5	-122.8	158.0	0.00	0.00	0.00
1,900.0	10.85	231.00	1,885.4	-111.3	-137.5	176.9	0.00	0.00	0.00
2,000.0	10.85	231.00	1,983.6	-123.2	-152.1	195.7	0.00	0.00	0.00
2,100.0	10.85	231.00	2,081.8	-135.0	-166.7	214.5	0.00	0.00	0.00
2,200.0	10.85	231.00	2,180.0	-146.9	-181.4	233.4	0.00	0.00	0.00
2,300.0	10.85	231.00	2,278.2	-158.7	-196.0	252.2	0.00	0.00	0.00
2,400.0	10.85	231.00	2,376.4	-170.6	-210.6	271.0	0.00	0.00	0.00
2,500.0	10.85	231.00	2,474.6	-182.4	-225.2	289.8	0.00	0.00	0.00
2,600.0	10.85	231.00	2,572.8	-194.3	-239.9	308.7	0.00	0.00	0.00
2,700.0	10.85	231.00	2,671.1	-206.1	-254.5	327.5	0.00	0.00	0.00
2,800.0	10.85	231.00	2,769.3	-218.0	-269.1	346.3	0.00	0.00	0.00
2,900.0	10.85	231.00	2,867.5	-229.8	-283.8	365.2	0.00	0.00	0.00
3,000.0	10.85	231.00	2,965.7	-241.7	-298.4	384.0	0.00	0.00	0.00
3,100.0	10.85	231.00	3,063.9	-253.5	-313.0	402.8	0.00	0.00	0.00
3,200.0	10.85	231.00	3,162.1	-265.4	-327.7	421.6	0.00	0.00	0.00
3,300.0	10.85	231.00	3,260.3	-277.2	-342.3	440.5	0.00	0.00	0.00
3,400.0	10.85	231.00	3,358.5	-289.1	-356.9	459.3	0.00	0.00	0.00
3,500.0	10.85	231.00	3,456.8	-300.9	-371.6	478.1	0.00	0.00	0.00
3,600.0	10.85	231.00	3,555.0	-312.8	-386.2	497.0	0.00	0.00	0.00
3,700.0	10.85	231.00	3,653.2	-324.6	-400.8	515.8	0.00	0.00	0.00
3,800.0	10.85	231.00	3,751.4	-336.5	-415.5	534.6	0.00	0.00	0.00
3,900.0	10.85	231.00	3,849.6	-348.3	-430.1	553.5	0.00	0.00	0.00
4,000.0	10.85	231.00	3,947.8	-360.1	-444.7	572.3	0.00	0.00	0.00
4,100.0	10.85	231.00	4,046.0	-372.0	-459.4	591.1	0.00	0.00	0.00
4,200.0	10.85	231.00	4,144.2	-383.8	-474.0	609.9	0.00	0.00	0.00
4,300.0	10.85	231.00	4,242.4	-395.7	-488.6	628.8	0.00	0.00	0.00
4,400.0	10.85	231.00	4,340.7	-407.5	-503.3	647.6	0.00	0.00	0.00
4,500.0	10.85	231.00	4,438.9	-419.4	-517.9	666.4	0.00	0.00	0.00
4,600.0	10.85	231.00	4,537.1	-431.2	-532.5	685.3	0.00	0.00	0.00
4,700.0	10.85	231.00	4,635.3	-443.1	-547.2	704.1	0.00	0.00	0.00
4,800.0	10.85	231.00	4,733.5	-454.9	-561.8	722.9	0.00	0.00	0.00
4,900.0	10.85	231.00	4,831.7	-466.8	-576.4	741.7	0.00	0.00	0.00
5,000.0	10.85	231.00	4,929.9	-478.6	-591.1	760.6	0.00	0.00	0.00
5,100.0	10.85	231.00	5,028.1	-490.5	-605.7	779.4	0.00	0.00	0.00
5,200.0	10.85	231.00	5,126.3	-502.3	-620.3	798.2	0.00	0.00	0.00




Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well I-31-8-18
Company:	NEWFIELD EXPLORATION	TVD Reference:	I-31-8-18 @ 5112.0ft (Newfield Rig)
Project:	USGS Myton SW (UT)	MD Reference:	I-31-8-18 @ 5112.0ft (Newfield Rig)
Site:	SECTION 31 T8S, R18E	North Reference:	True
Well:	I-31-8-18	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,300.0	10.85	231.00	5,224.6	-514.2	-635.0	817.1	0.00	0.00	0.00
5,376.8	10.85	231.00	5,300.0	-523.3	-646.2	831.5	0.00	0.00	0.00
5,400.0	10.85	231.00	5,322.8	-526.0	-649.6	835.9	0.00	0.00	0.00
5,500.0	10.85	231.00	5,421.0	-537.9	-664.2	854.7	0.00	0.00	0.00
5,600.0	10.85	231.00	5,519.2	-549.7	-678.9	873.6	0.00	0.00	0.00
5,700.0	10.85	231.00	5,617.4	-561.6	-693.5	892.4	0.00	0.00	0.00
5,800.0	10.85	231.00	5,715.6	-573.4	-708.1	911.2	0.00	0.00	0.00
5,900.0	10.85	231.00	5,813.8	-585.3	-722.8	930.0	0.00	0.00	0.00
6,000.0	10.85	231.00	5,912.0	-597.1	-737.4	948.9	0.00	0.00	0.00
6,100.0	10.85	231.00	6,010.2	-609.0	-752.0	967.7	0.00	0.00	0.00
6,200.0	10.85	231.00	6,108.5	-620.8	-766.7	986.5	0.00	0.00	0.00
6,300.0	10.85	231.00	6,206.7	-632.7	-781.3	1,005.4	0.00	0.00	0.00
6,400.0	10.85	231.00	6,304.9	-644.5	-795.9	1,024.2	0.00	0.00	0.00
6,500.0	10.85	231.00	6,403.1	-656.4	-810.6	1,043.0	0.00	0.00	0.00
6,600.0	10.85	231.00	6,501.3	-668.2	-825.2	1,061.8	0.00	0.00	0.00
6,639.4	10.85	231.00	6,540.0	-672.9	-831.0	1,069.3	0.00	0.00	0.00





Project: USGS Myton SW (UT)
 Site: SECTION 31 T8S, R18E
 Well: I-31-8-18
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.24°

Magnetic Field
 Strength: 52294.2snT
 Dip Angle: 65.85°
 Date: 2011/08/16
 Model: IGRF2010

KOP @ 600'
 DOGLEG RATE 1.5 DEG/100
 TARGET RADIUS IS 75'

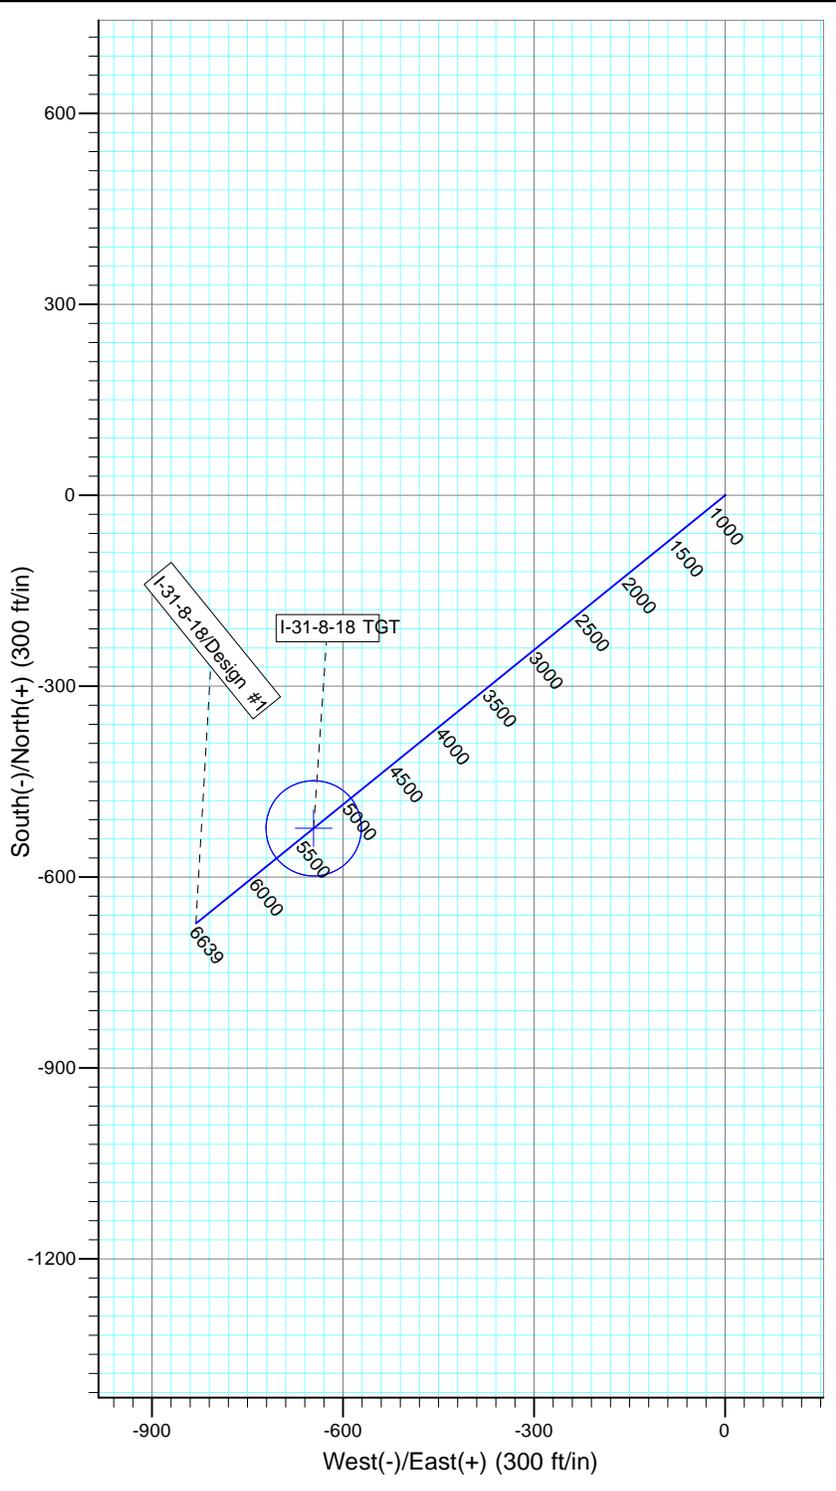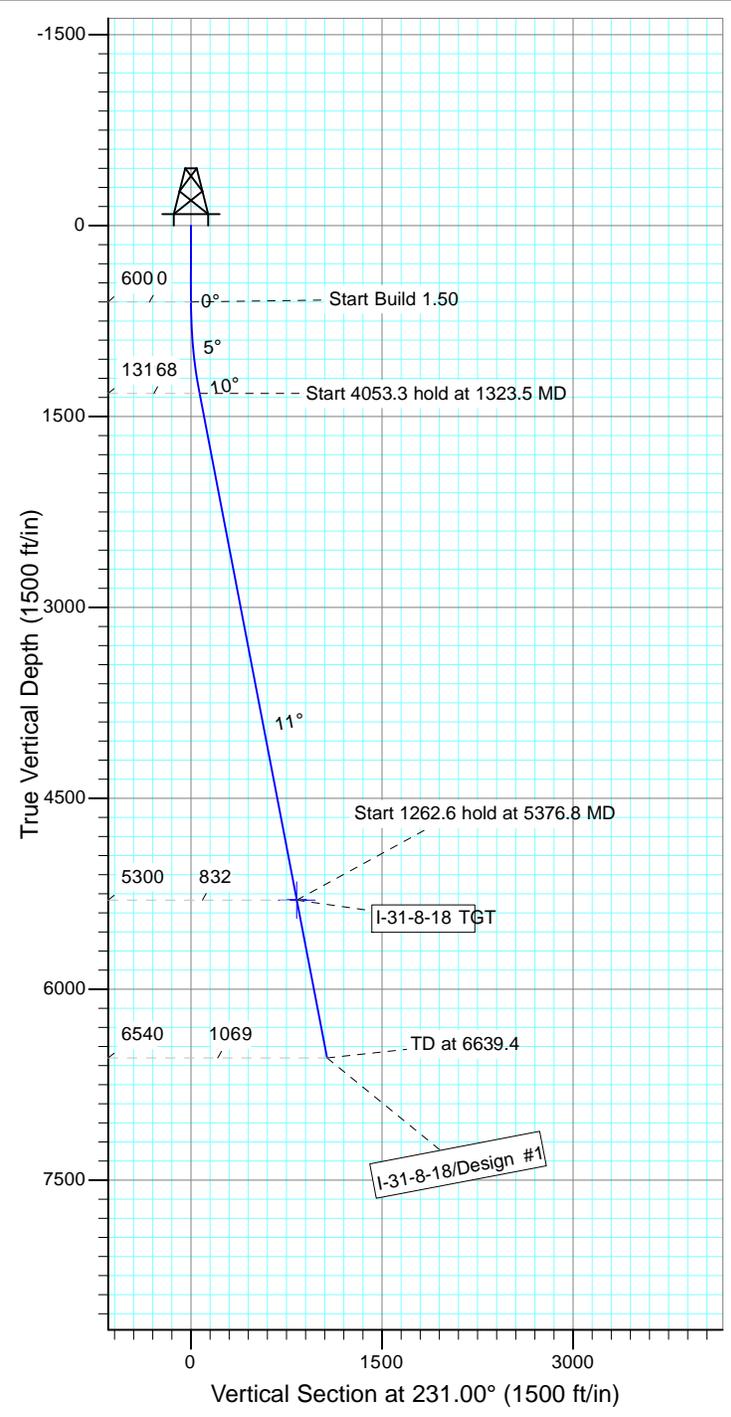

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
I-31-8-18 TGT	5300.0	-523.3	-646.2	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1323.5	10.85	231.00	1319.2	-43.0	-53.1	1.50	231.00	68.3	
4	5376.8	10.85	231.00	5300.0	-523.3	-646.2	0.00	0.00	831.5	I-31-8-18 TGT
5	6639.4	10.85	231.00	6540.0	-672.9	-831.0	0.00	0.00	1069.3	



**NEWFIELD PRODUCTION COMPANY
GMBU I-31-8-18
AT SURFACE: NE/NE SECTION 31, T8S R18E
UINTAH COUNTY, UTAH**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site GMBU I-31-8-18 located in the NE 1/4 NE 1/4 Section 31, T8S R18E, Uintah County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 – 1.4 miles \pm to the junction of this highway and UT State Hwy 53; proceed in a southeasterly direction – 11.7 miles \pm to it's junction with an existing road to the northeast; ; proceed in a northeasterly direction – 5.0 miles \pm to it's junction with the beginning of the access road to the existing I-31-8-18 well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

2. PLANNED ACCESS ROAD

There is no proposed access road for this location. The proposed well will be drilled directionally off of the existing I-31-8-18 well pad. See attached **Topographic Map "B"**.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District
Water Right : 43-10136

Maurice Harvey Pond
Water Right: 47-1358

Neil Moon Pond
Water Right: 43-11787

Newfield Collector Well
Water Right: 47-1817 (A30414DVA, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site.

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

8. **ANCILLARY FACILITIES**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT**

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. **PLANS FOR RESTORATION OF SURFACE:**

- a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

- b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP** – Bureau of Land Management.

12. **OTHER ADDITIONAL INFORMATION**

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. State of Utah Antiquities Project Permit # U-11-MQ-0962b,s 2/29/12, prepared by Montgomery Archaeological Consultants. Paleontological Resource Survey prepared by, Wade Miller, 3/1/02. See attached report cover pages, Exhibit "D".

Surface Flow Line

Newfield requests 1,184' of surface flow line be granted. The Surface Flow Line will consist of up to a 14" bundled pipe consisting of 2-2" poly glycol lines and 1-3" production line. For all new wells, Newfield. **Refer to Topographic Map "C"** for the proposed location of the proposed flow line. Flow lines will be tan and will be constructed using the following procedures:

Clearing and Grading: No clearing or grading of the ROW will be required. The centerline of the proposed route will be staked prior to installation. Flow lines shall be placed as close to existing roads as possible without interfering with normal road travel or road maintenance activities. Due to the proximity of existing facilities, no temporary use or construction/storage areas are anticipated. If necessary, temporary use or construction/storage areas will be identified on a topographic map included in the approved permit.

Installation: The proposed flow lines will be installed 4-6" above the ground. For portions along existing two-track and primary access roads, lengths of pipe will be strung out in the borrow ditch, welded together, and rolled or dragged into place with heavy equipment. For pipelines that are installed cross-country (not along existing or proposed roads), travel along the lines will be infrequent and for maintenance needs only. No installation activities will be performed during periods when the soil is too wet to adequately support installation equipment. If such equipment creates ruts in excess of three (3) inches deep, the soil will be deemed too wet to adequately support the equipment.

Termination and Final Reclamation: After abandonment of the associated production facilities, the flow lines will be cut and removed, and any incidental surface disturbance reclaimed. Reclamation procedures will follow those outlined in the Castle Peak and Eight Mile Flat Reclamation and Weed Management Plan.

Water Disposal

After first production, if the production water meets quality guidelines, it will be transported to the Ashley, Monument Butte, Jonah, South Wells Draw and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project. Water not meeting quality criteria, will be disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), Federally approved surface disposal facilities or at a State of Utah approved surface disposal facilities.

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Details of the On-Site Inspection

The proposed GMBU I-31-8-18 was on-sited on 1/13/12. The following were present; Tim Eaton (Newfield Production), Janna Simonsen (Bureau of Land Management), Aaron Roe (Bureau of Land Management), Suzanne Grayson (Bureau of Land Management), and Jessie Brunson (USFWS).

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the GMBU I-31-8-18, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the GMBU I-31-8-18, Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

Representative

Name: Corie Miller
Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification


Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #I-31-8-18, Section 31, Township 8S, Range 18E: Lease UTU-74872 Uintah County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, Federal Bond #WYB000493.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

4/25/12
Date

Mandie Crozier
Regulatory Analyst
Newfield Production Company

Typical 2M BOP stack configuration

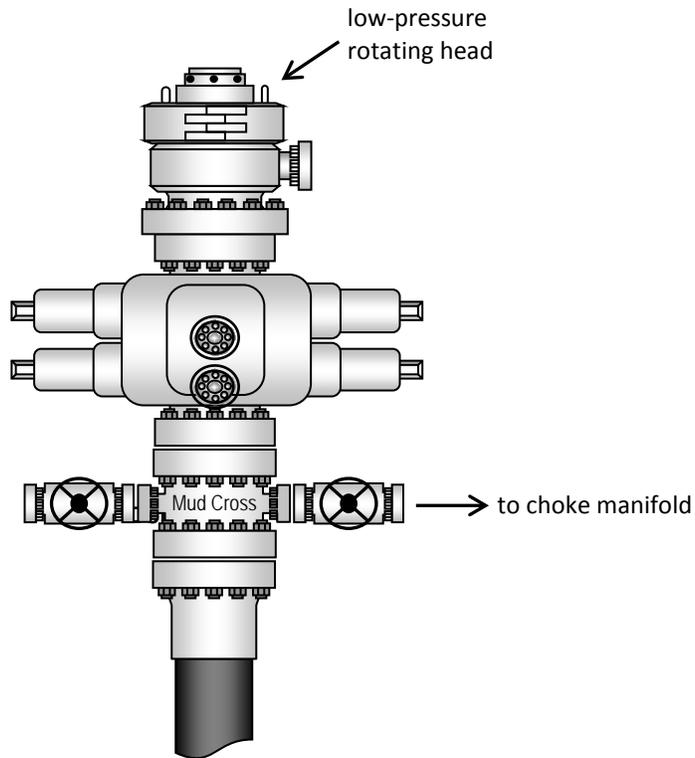

2M CHOKE MANIFOLD EQUIPMENT - CONFIGURATION OF CHOKES MAY VARY

NEWFIELD EXPLORATION COMPANY

WELL PAD INTERFERENCE PLAT

1-31-8-18 (Existing Well)

I-31-8-18 (Proposed Well)

F-32-8-18 (Proposed Well)

Pad Location: NENE Section 31, T8S, R18E, S.L.B.&M.

TOP HOLE FOOTAGES

1-31-8-18 (PROPOSED)
989' FNL & 664' FEL

F-32-8-18 (PROPOSED)
982' FNL & 644' FEL

CENTER OF PATTERN FOOTAGES


1-31-8-18 (PROPOSED)
1500' FNL & 1320' FEL

F-32-8-18 (PROPOSED)
1425' FNL & 30' FEL

BOTTOM HOLE FOOTAGES

1-31-8-18 (PROPOSED)
1646' FNL & 1507' FEL

F-32-8-18 (PROPOSED)
1552' FNL & 145' FWL

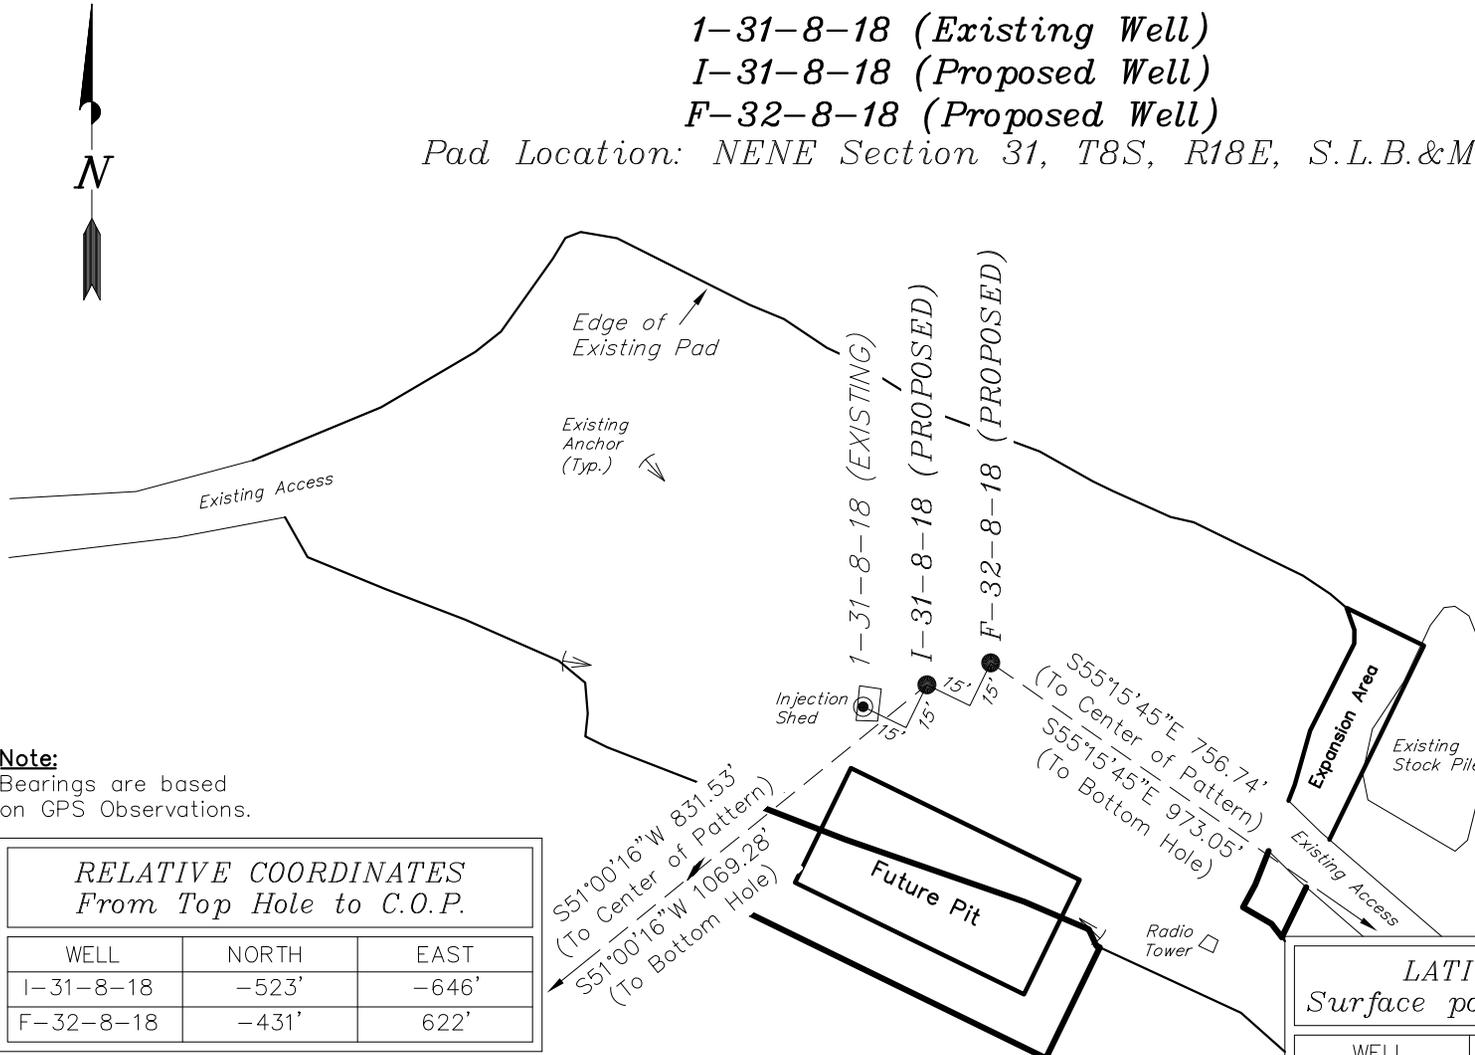

Note:
Bearings are based
on GPS Observations.

RELATIVE COORDINATES From Top Hole to C.O.P.

WELL	NORTH	EAST
I-31-8-18	-523'	-646'
F-32-8-18	-431'	622'

RELATIVE COORDINATES From Top Hole to Bottom Hole

WELL	NORTH	EAST
I-31-8-18	-673'	-831'
F-32-8-18	-555'	800'

S51°00'16"W 831.53'
 (To Center of Pattern)
 S51°00'16"W 1069.28'
 (To Bottom Hole)

S55°15'45"E 756.74'
 (To Center of Pattern)
 S55°15'45"E 973.05'
 (To Bottom Hole)

LATITUDE & LONGITUDE Surface position of Wells (NAD 83)

WELL	LATITUDE	LONGITUDE
1-31-8-18	40° 04' 44.24"	109° 55' 45.38"
I-31-8-18	40° 04' 44.30"	109° 55' 45.12"
F-32-8-18	40° 04' 44.37"	109° 55' 44.86"

SURVEYED BY: K.S.	DATE SURVEYED: 08-05-11	VERSION:
DRAWN BY: F.T.M.	DATE DRAWN: 08-24-11	V1
SCALE: 1" = 60'	REVISED:	

Tri State (435) 781-2501
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD EXPLORATION COMPANY


LOCATION LAYOUT

1-31-8-18 (Existing Well)

I-31-8-18 (Proposed Well)

F-32-8-18 (Proposed Well)

Pad Location: NENE Section 31, T8S, R18E, S.L.B.&M.

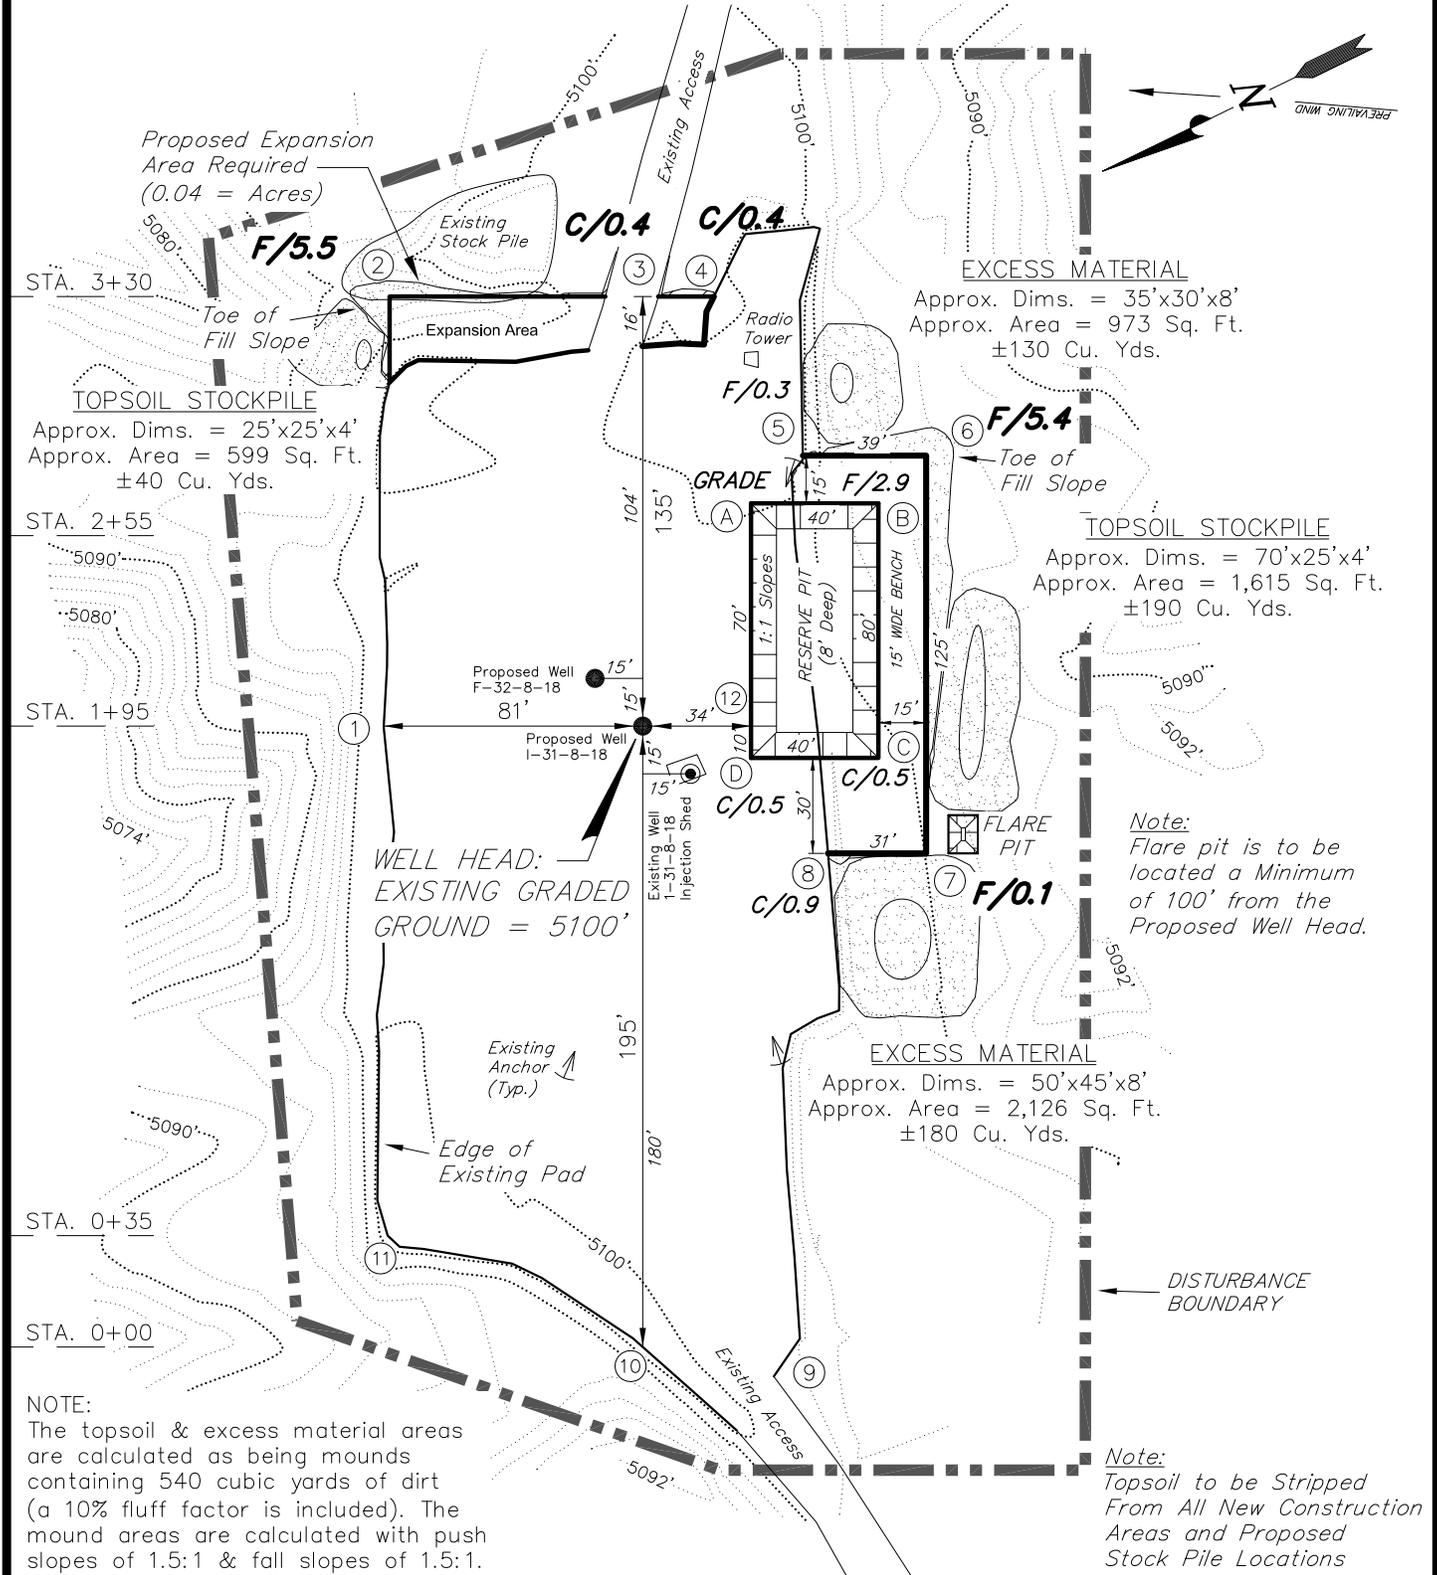

NOTE:
The topsoil & excess material areas are calculated as being mounds containing 540 cubic yards of dirt (a 10% fluff factor is included). The mound areas are calculated with push slopes of 1.5:1 & fall slopes of 1.5:1.

Note:
Topsoil to be Stripped From All New Construction Areas and Proposed Stock Pile Locations

SURVEYED BY: K.S.	DATE SURVEYED: 08-05-11	VERSION:
DRAWN BY: F.T.M.	DATE DRAWN: 08-24-11	V1
SCALE: 1" = 60'	REVISED:	

Tri State (435) 781-2501
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD EXPLORATION COMPANY





CROSS SECTIONS

1-31-8-18 (Existing Well)

I-31-8-18 (Proposed Well)

F-32-8-18 (Proposed Well)

Pad Location: NENE Section 31, T8S, R18E, S.L.B.&M.

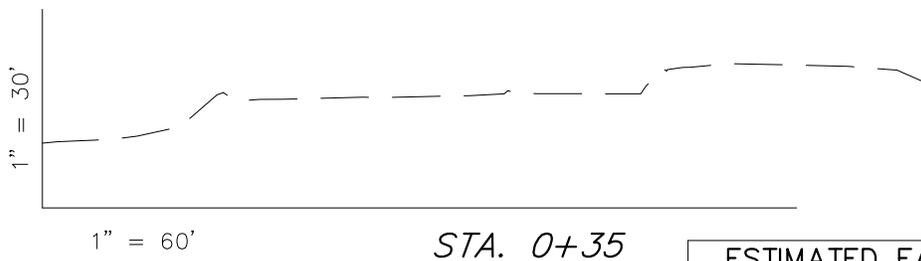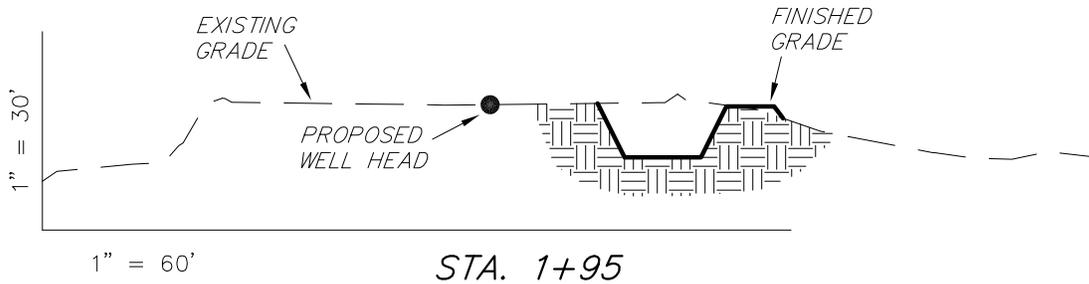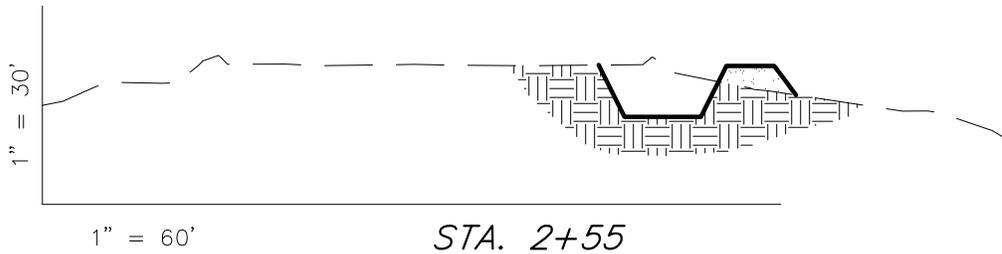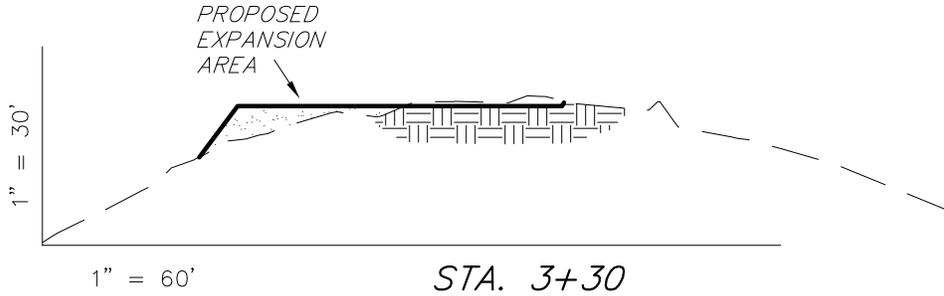

NOTE:
UNLESS OTHERWISE
NOTED ALL CUT/FILL
SLOPES ARE AT 1.5:1

ESTIMATED EARTHWORK QUANTITIES
(No Shrink or swell adjustments have been used)
(Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	0	260	Topsoil is not included in Pad Cut	-260
PIT	660	0		660
TOTALS	660	260	210	400

SURVEYED BY: K.S.	DATE SURVEYED: 08-05-11	VERSION:
DRAWN BY: F.T.M.	DATE DRAWN: 08-24-11	V1
SCALE: 1" = 60'	REVISED:	

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

(435) 781-2501



VIA ELECTRONIC DELIVERY

May 3, 2012

State of Utah, Division of Oil, Gas and Mining
ATTN: Diana Mason
P.O. Box 145801
Salt Lake City, UT 84114-5801

RE: Directional Drilling
GMBU I-31-8-18
Greater Monument Butte (Green River) Unit

Surface Hole: T8S-R18E Section 31: NENE (UTU-74872)
989' FNL 664' FEL

At Target: T8S-R18E Section 31: SWNE (UTU-74872)
1646' FNL 1507' FWL

Uintah County, Utah

Dear Ms. Mason:

Pursuant to the filing by Newfield Production Company (NPC) of an Application for Permit to Drill the above referenced well dated 5/1/2012, a copy of which is attached, and in accordance with Oil and Gas Conservation Rule R649-3-11, NPC hereby submits this letter as notice of our intention to directionally drill this well.

The surface hole and target locations of this well are both within the boundaries of the Greater Monument Butte Unit (UTU-87538X), of which Newfield certifies that it is the operator. Further, Newfield certifies that all lands within 460 feet of the entire directional well bore are within the Greater Monument Butte Unit.

NPC is permitting this well as a directional well in order to mitigate surface disturbance by utilizing pre-existing roads and pipelines.

NPC hereby requests our application for permit to drill be granted pursuant to R649-3-11. If you have any questions or require further information, please contact the undersigned at 303-383-4121 or by email at lburget@newfield.com. Your consideration in this matter is greatly appreciated.

Sincerely,
Newfield Production Company

A handwritten signature in blue ink that reads "Leslie Burget".

Leslie Burget
Land Associate

Form 3160-3
(August 2007)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0136
Expires July 31, 2010

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU74872
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator NEWFIELD PRODUCTION COMPANY		7. If Unit or CA Agreement, Name and No. GREATER MONUMENT
Contact: MANDIE CROZIER Email: mcrozier@newfield.com		8. Lease Name and Well No. GMBU I-31-8-18
3a. Address ROUTE #3 BOX 3630 MYTON, UT 84052	3b. Phone No. (include area code) Ph: 435-646-4825 Fx: 435-646-3031	9. API Well No.
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NENE 989FNL 664FEL At proposed prod. zone SWNE 1646FNL 1507FEL		10. Field and Pool, or Exploratory MONUMENT BUTTE
14. Distance in miles and direction from nearest town or post office* 18.1 MILES SOUTHEAST OF MYTON, UT		11. Sec., T., R., M., or Blk. and Survey or Area Sec 31 T8S R18E Mer SLB
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 994'	16. No. of Acres in Lease 637.36	12. County or Parish UINTAH
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 771'	19. Proposed Depth 6639 MD 6540 TVD	13. State UT
21. Elevations (Show whether DF, KB, RT, GL, etc.) 5001 GL	22. Approximate date work will start 07/31/2012	17. Spacing Unit dedicated to this well 20.00
		20. BLM/BIA Bond No. on file WYB000493
		23. Estimated duration 7 DAYS

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|--|--|
| <ol style="list-style-type: none"> 1. Well plat certified by a registered surveyor. 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | <ol style="list-style-type: none"> 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 5. Operator certification 6. Such other site specific information and/or plans as may be required by the authorized officer. |
|--|--|

25. Signature (Electronic Submission)	Name (Printed/Typed) MANDIE CROZIER Ph: 435-646-4825	Date 05/01/2012
Title REGULATORY ANALYST		
Approved by (Signature)	Name (Printed/Typed)	Date
Title	Office	

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

**Electronic Submission #136724 verified by the BLM Well Information System
For NEWFIELD PRODUCTION COMPANY, sent to the Vernal**

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****

API Well Number: 43047525980000

Additional Operator Remarks:



SURFACE LEASE: UTU-74872
BOTTOM HOLE LEASE: UTU-74872

T8S, R18E, S.L.B.&M.

NEWFIELD EXPLORATION COMPANY

WELL LOCATION, I-31-8-18, LOCATED AS SHOWN IN THE NE 1/4 NE 1/4 OF SECTION 31, T8S, R18E, S.L.B.&M. UINTAH COUNTY, UTAH.

TARGET BOTTOM HOLE, I-31-8-18, LOCATED AS SHOWN IN THE SW 1/4 NE 1/4 OF SECTION 31, T8S, R18E, S.L.B.&M. UINTAH COUNTY, UTAH.

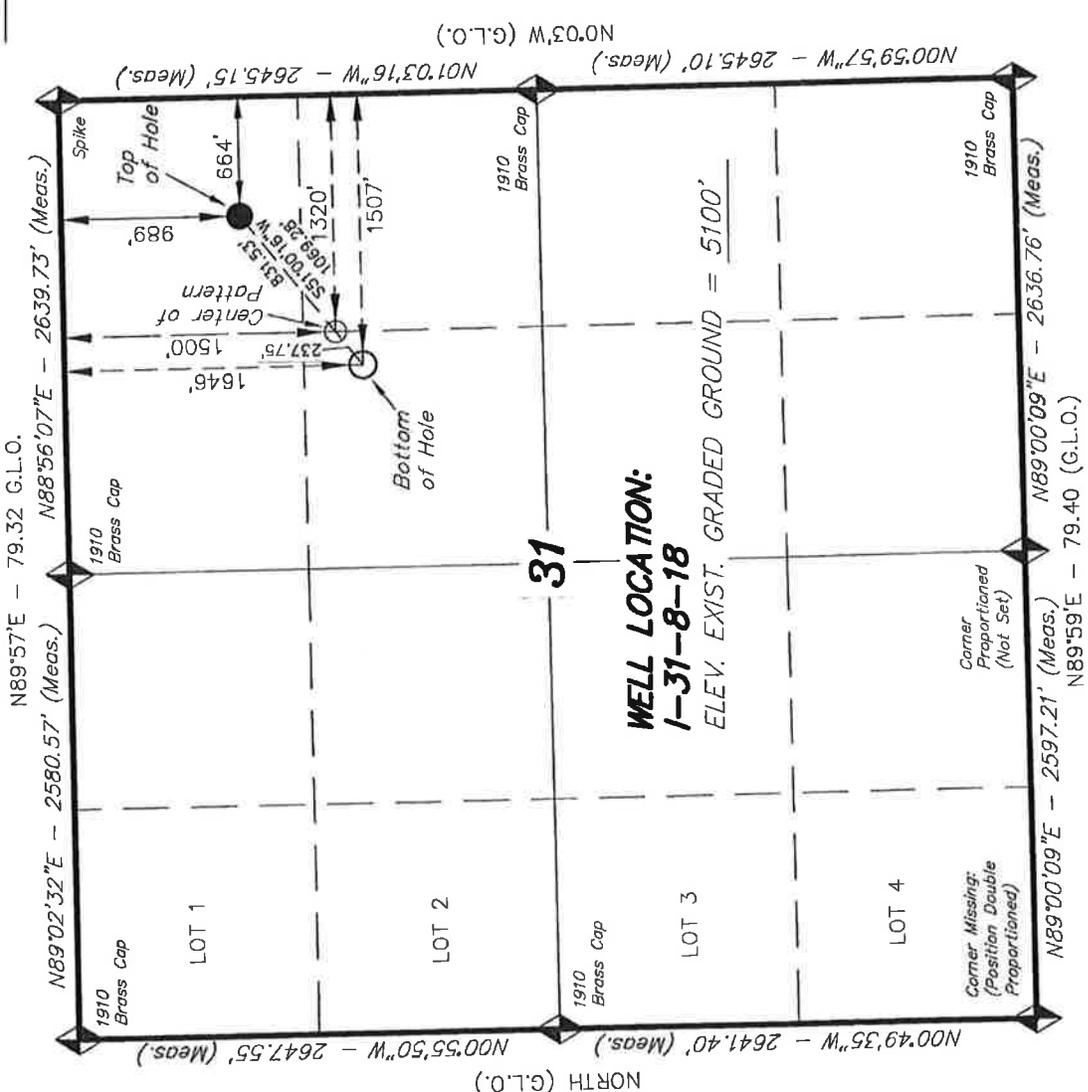

- NOTES:**
1. Well footages are measured at right angles to the Section Lines.
 2. Bearings are based on Global Positioning Satellite observations.

**WELL LOCATION:
I-31-8-18**
ELEV. EXIST. GRADED GROUND = 5100'

THIS IS TO CERTIFY THAT THE ABOVE WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

BY *Stacy W.*
11-11-11
REGISTERED LAND SURVEYOR
REGISTRATION NO. 6189377
STATE OF UTAH


TRI STATE LAND SURVEYING & CONSULTING
180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
(435) 781-2501

DATE SURVEYED: 08-05-11	SURVEYED BY: K.S.	VERSION:
DATE DRAWN: 08-24-11	DRAWN BY: F.T.M.	V1
REVISED:	SCALE: 1" = 1000'	

I-31-8-18
(Surface Location) **NAD 83**
LATITUDE = 40° 04' 44.30"
LONGITUDE = 109° 55' 45.12"

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV; Elevations are based on an N.G.S. OPUS Correction. LOCATION: LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'

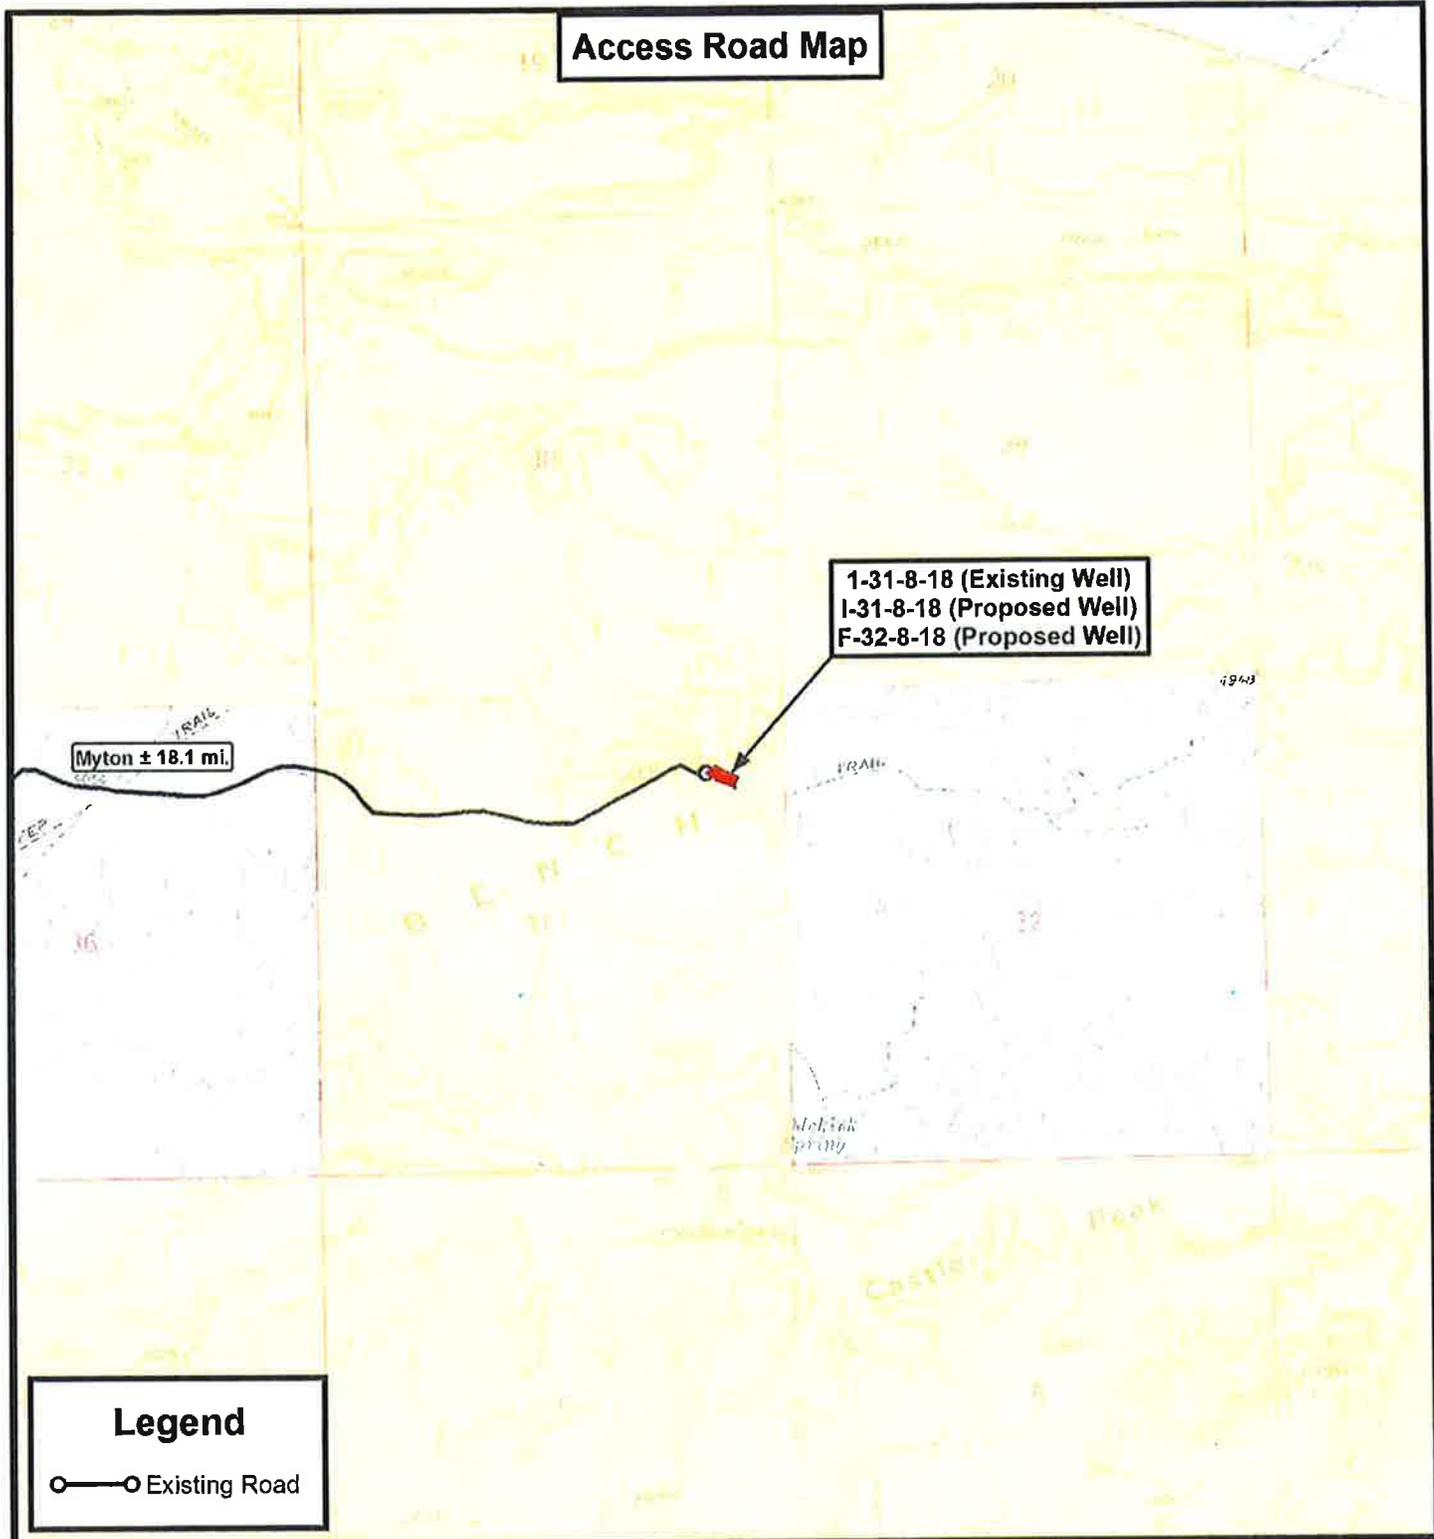

Legend
 ○—○ Existing Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

Tri State Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078
 P: (435) 781-2501
 F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

1-31-8-18 (Existing Well)
 I-31-8-18 (Proposed Well)
 F-32-8-18 (Proposed Well)
 SEC. 31, T8S, R18E, S.L.B.&M. Uintah County, UT.

DRAWN BY:	D.C.R.	REVISED:	VERSION:
DATE:	08-29-2011		V1
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET
B

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office

P.O. Box 45155

Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:**3160****(UT-922)**

May 8, 2012

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2012 Plan of Development Greater Monument
Butte Unit, Duchesne and Uintah Counties,
Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2012 within the Greater Monument Butte Unit, Duchesne and Uintah Counties, Utah.

API #	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-047-52547	GMBU V-26-8-17	Sec 35 T08S R17E 0596 FNL 1880 FEL BHL Sec 26 T08S R17E 0100 FSL 1172 FEL
43-047-52592	GMBU O-31-8-18	Sec 36 T08S R17E 1975 FSL 0613 FEL BHL Sec 31 T08S R18E 2548 FNL 0112 FWL
43-047-52593	GMBU F-31-8-18	Sec 36 T08S R17E 0667 FNL 0629 FEL BHL Sec 31 T08S R18E 1496 FNL 0273 FWL
43-047-52594	GMBU P-32-8-18	Sec 31 T08S R18E 2163 FSL 0736 FEL BHL Sec 32 T08S R18E 1235 FSL 0119 FWL
43-047-52595	GMBU O-32-8-18	Sec 31 T08S R18E 2178 FSL 0722 FEL BHL Sec 32 T08S R18E 2474 FNL 0129 FWL
43-047-52596	GMBU F-32-8-18	Sec 31 T08S R18E 0982 FNL 0644 FEL BHL Sec 32 T08S R18E 1552 FNL 0145 FWL
43-047-52597	GMBU P-31-8-18	Sec 36 T08S R17E 1958 FSL 0626 FEL BHL Sec 31 T08S R18E 1037 FSL 0209 FWL
43-047-52598	GMBU I-31-8-18	Sec 31 T08S R18E 0989 FNL 0664 FEL BHL Sec 31 T08S R18E 1646 FNL 1507 FEL
43-047-52599	GMBU S-31-8-18	Sec 31 T08S R18E 1960 FSL 2123 FEL BHL Sec 31 T08S R18E 1174 FSL 1320 FEL

RECEIVED: May 08, 2012

API #	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-013-51394	GMBU T-34-8-17	Sec 35 T08S R17E 0689 FSL 0848 FWL BHL Sec 34 T08S R17E 1363 FSL 0169 FEL
43-013-51395	GMBU O-35-8-17	Sec 34 T08S R17E 1877 FNL 0742 FEL BHL Sec 35 T08S R17E 2309 FSL 0186 FWL
43-047-52600	GMBU Y-25-8-17	Sec 35 T08S R17E 0671 FNL 0645 FEL BHL Sec 25 T08S R17E 0211 FSL 0228 FWL
43-047-52602	GMBU Y-30-8-18	Sec 36 T08S R17E 0662 FNL 0133 FEL BHL Sec 30 T08S R18E 0029 FSL 0317 FWL


This office has no objection to permitting the wells at this time.

Michael L. Coulthard

Digitally signed by Michael L. Coulthard
DN: cn=Michael L. Coulthard, o=Bureau of Land Management,
ou=Branch of Minerals, email=Michael_Coulthard@blm.gov,
c=US
Date: 2012.05.08 14:49:49 -06'00'

bcc: File - Greater Monument Butte Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron
Fluid Chron


MCoulthard:mc:5-8-12

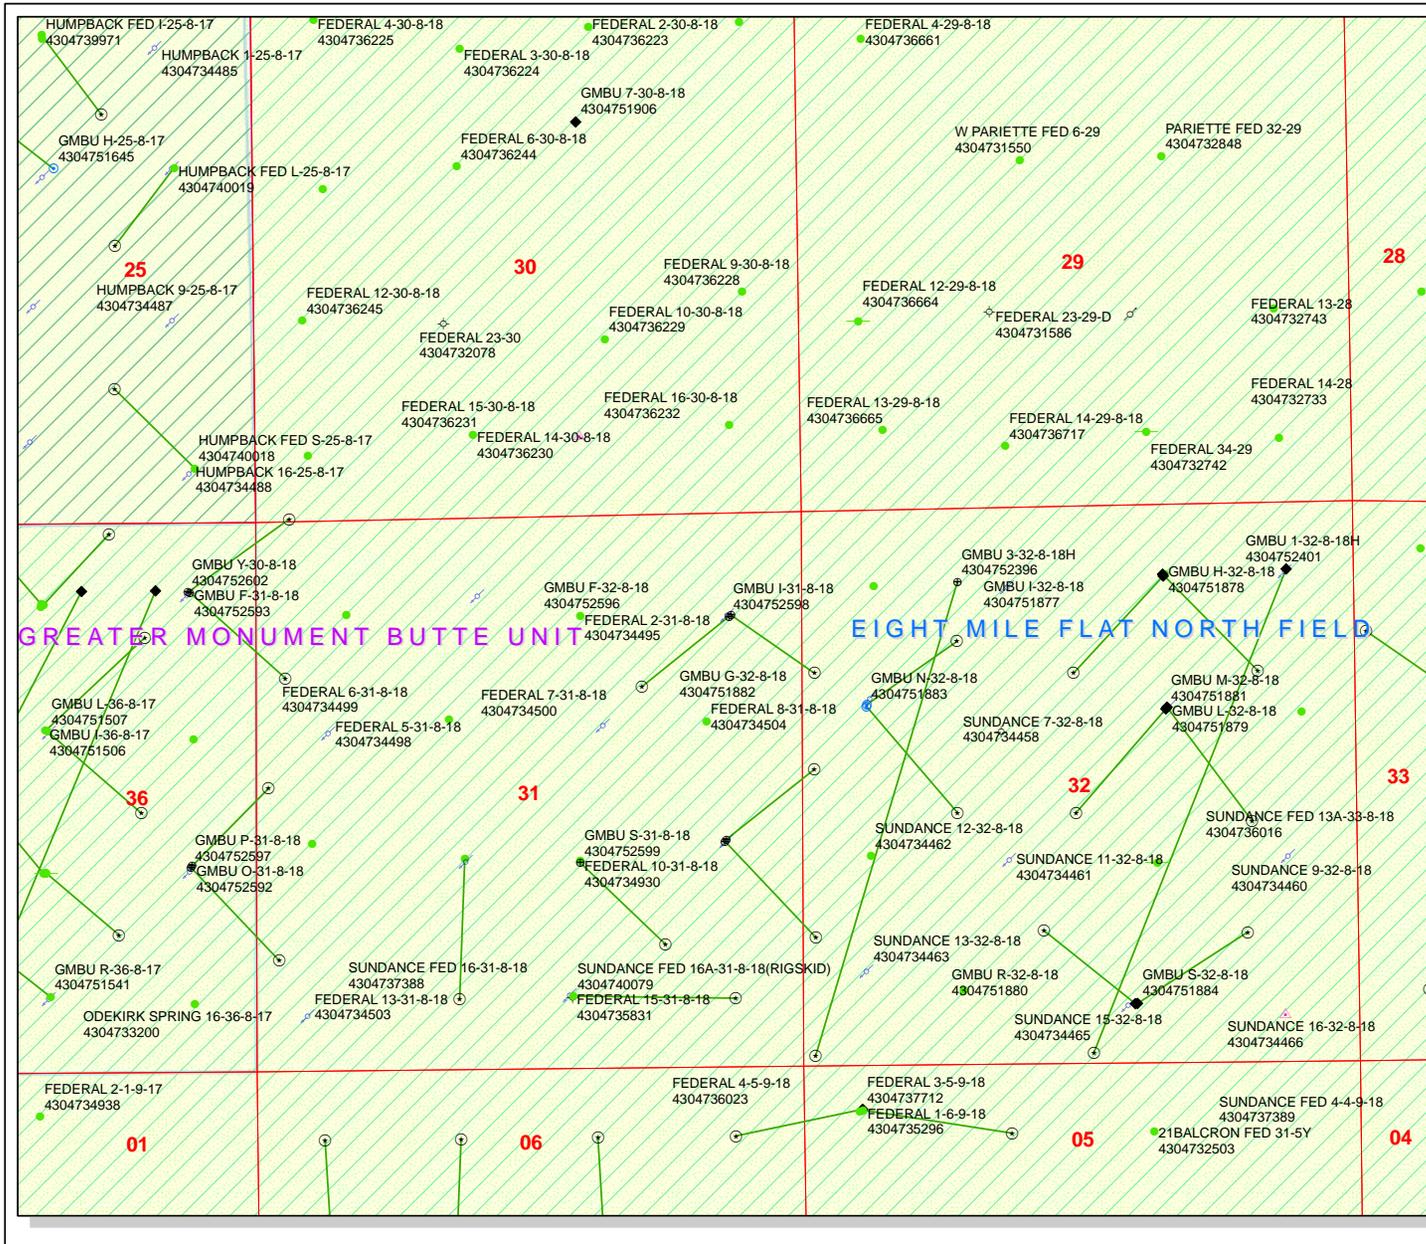

API Number: 4304752598
Well Name: GMBU I-31-8-18
 Township T08 . Range R1.8 . Section 31
Meridian: SLBM
 Operator: NEWFIELD PRODUCTION COMPANY

Map Prepared:
 Map Produced by Diana Mason

Units STATUS	Wells Query Status
ACTIVE	APD - Approved Permit
EXPLORATORY	DRL - Spudded (Drilling Commenced)
GAS STORAGE	GMW - Gas Injection
NF PP OIL	GS - Gas Storage
NF SECONDARY	LA - Location Abandoned
PI OIL	LOC - New Location
PP GAS	OPS - Operation Suspended
PP GEOTHERMAL	PA - Plugged Abandoned
PP OIL	PGW - Producing Gas Well
SECONDARY	POW - Producing Oil Well
TERMINATED	RET - Returned APD
Fields STATUS	SGW - Shut-in Gas Well
Unknown	SOW - Shut-in Oil Well
ABANDONED	TA - Temp. Abandoned
ACTIVE	TW - Test Well
COMBINED	WDW - Water Disposal
INACTIVE	WWI - Water Injection Well
STORAGE	WSW - Water Supply Well
TERMINATED	



WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 4/30/2012

API NO. ASSIGNED: 43047525980000

WELL NAME: GMBU I-31-8-18

OPERATOR: NEWFIELD PRODUCTION COMPANY (N2695)

PHONE NUMBER: 435 646-4825

CONTACT: Mandie Crozier

PROPOSED LOCATION: NENE 31 080S 180E

Permit Tech Review:

SURFACE: 0989 FNL 0664 FEL

Engineering Review:

BOTTOM: 1646 FNL 1507 FEL

Geology Review:

COUNTY: UINTAH

LATITUDE: 40.07895

LONGITUDE: -109.92926

UTM SURF EASTINGS: 591294.00

NORTHINGS: 4437069.00

FIELD NAME: MONUMENT BUTTE

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-74872

PROPOSED PRODUCING FORMATION(S): GREEN RIVER

SURFACE OWNER: 1 - Federal

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

- PLAT
- Bond: FEDERAL - WYB000493
- Potash
- Oil Shale 190-5
- Oil Shale 190-3
- Oil Shale 190-13
- Water Permit: 437478
- RDCC Review:
- Fee Surface Agreement
- Intent to Commingle

Commingling Approved

LOCATION AND SITING:

- R649-2-3.
- Unit: GMBU (GRRV)
- R649-3-2. General
- R649-3-3. Exception
- Drilling Unit
- Board Cause No: Cause 213-11
- Effective Date: 11/30/2009
- Siting: Suspends General Siting
- R649-3-11. Directional Drill

Comments: Presite Completed

Stipulations: 4 - Federal Approval - dmason
15 - Directional - dmason
27 - Other - bhll



GARY R. HERBERT
Governor

GREGORY S. BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: GMBU I-31-8-18
API Well Number: 43047525980000
Lease Number: UTU-74872
Surface Owner: FEDERAL
Approval Date: 5/17/2012

Issued to:

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

Authority:

Pursuant to Utah Code Ann. 40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 213-11. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Production casing cement shall be brought up to or above the top of the unitized interval for the Greater Monument Butte Unit (Cause No. 213-11).

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well - contact Carol Daniels at 801-538-5284

(please leave a voicemail message if not available)

OR

submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website
at <http://oilgas.ogm.utah.gov>

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) - due within 5 days of spudding the well
- Monthly Status Report (Form 9) - due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) - due prior to implementation
- Written Notice of Emergency Changes (Form 9) - due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) - due prior to implementation
- Report of Water Encountered (Form 7) - due within 30 days after completion
- Well Completion Report (Form 8) - due within 30 days after completion or plugging

Approved By:

A handwritten signature in black ink, appearing to read "John Rogers", written over a horizontal line.

For John Rogers
Associate Director, Oil & Gas

RECEIVED

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
MAY 08 2012

APPLICATION FOR PERMIT TO DRILL OR REENTER
BLM

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU74872
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator NEWFIELD PRODUCTION COMPANY Contact: MANDIE CROZIER Email: mcrozier@newfield.com		7. If Unit or CA Agreement, Name and No. GREATER MONUMENT
3a. Address ROUTE #3 BOX 3630 MYTON, UT 84052		8. Lease Name and Well No. GMBU I-31-8-18
3b. Phone No. (include area code) Ph: 435-646-4825 Fx: 435-646-3031		9. API Well No. 43-047-52598
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface NENE 989FNL 664FEL At proposed prod. zone SWNE 1646FNL 1507FEL		10. Field and Pool, or Exploratory MONUMENT BUTTE
14. Distance in miles and direction from nearest town or post office* 18.1 MILES SOUTHEAST OF MYTON, UT		11. Sec., T., R., M., or Blk. and Survey or Area Sec 31 T8S R18E Mer SLB
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 994'	16. No. of Acres in Lease 637.36	12. County or Parish UINTAH
17. Spacing Unit dedicated to this well 20.00	13. State UT	17. BLM/BIA Bond No. on file WYB000493
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 771'	19. Proposed Depth 6639 MD 6540 TVD	20. Estimated duration 7 DAYS
21. Elevations (Show whether DF, KB, RT, GL, etc.) 5001 GL	22. Approximate date work will start 07/31/2012	23. Estimated duration 7 DAYS

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature (Electronic Submission)	Name (Printed/Typed) MANDIE CROZIER Ph: 435-646-4825	Date 05/01/2012
Title REGULATORY ANALYST		
Approved by (Signature)	Name (Printed/Typed) Jerry Kenczka	Date NOV 16 2012
Title Assistant Field Manager Lands & Mineral Resources	Office VERNAL FIELD OFFICE	

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

Electronic Submission #136724 verified by the BLM Well Information System
For NEWFIELD PRODUCTION COMPANY, sent to the Vernal
Committed to AFMSS for processing by LESLIE ROBINSON on 05/14/2012 ()

NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED

** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED **

125X50000AR

NOV 19/12

RECEIVED
NOV 23 2012
BLM, OIL, GAS & MINING

UDOGM



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: Newfield Production Company
Well No: GMBU I-31-8-18
API No: 43-047-52598

Location: SWSW, Sec. 14, T10S, R22E
Lease No: UTU-74872
Agreement: GREATER MONUMENT BUTTE

OFFICE NUMBER: (435) 781-4400

OFFICE FAX NUMBER: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Location Construction (Notify Environmental Scientist)	- Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	- Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	- Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to running casing and cementing all casing strings to: blm_ut_vn_opreport@blm.gov
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	- Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

- All new and replacement internal combustion gas field engines of less than or equal to 300 design-rated horsepower must not emit more than 2 gms of NO_x per horsepower-hour. This requirement does not apply to gas field engines of less than or equal to 40 design-rated horsepower.
- All and replacement internal combustion gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 gms of NO_x per horsepower-hour.
- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

Monitoring and Reporting

- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) that designates the proposed site-specific monitoring and reference sites chosen for the location. A description of the proposed sites shall be included, as well as a map showing the locations of the proposed sites.
- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) 3 growing seasons after reclamation efforts have occurred evaluating the status of the reclaimed areas in order to determine whether the BLM standards set forth in the Green River District Reclamation Guidelines have been met (30% or greater basal cover).
- Prior to beginning new surface disturbance, the operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) providing the results of the noxious weed inventory described in the Green River District Reclamation Guidelines (2011). If weeds are found the report shall include 1) A GPS location recorded in North American Datum 1983; 2) species; 3) canopy cover or number of plants; 4) and size of infestation (estimate square feet or acres. Information shall be also documented in the reclamation report.

CONDITIONS OF APPROVAL

Wildlife

In accordance with the Record of Decision for the Castle Peak and Eightmile Flat Oil and Gas Expansion Project, Newfield Rocky Mountains Inc., the following COA's are required:

- WFM-1 On level or gently sloping ground (5 percent slope or less) Newfield will elevate surface pipelines (4 inches or greater in diameter) a minimum of 6 inches above the ground to allow passage of small animals beneath the pipe. This ground clearance will be achieved by placing the pipeline on blocks at intervals of 150 to 200 feet.
- WFM-4 Newfield will install noise reduction devices on all pump jacks to reduce intermittent noise to 45 dBA at 660 feet from the source.

COA's derived from mitigating measures in the EA:

- Newfield will contract a qualified biologist to conduct a breeding bird survey within 330 feet (100 meters) from proposed surface disturbance activities associated with wellfield development (e.g. well pads, roads, pipelines, power lines, and ancillary facilities) that would occur during the breeding season from April 1 through July 31. If an active nest for important migratory bird species (USFWS Bird of Conservation Concern, Partners in Flight Priority Bird Species, Utah Sensitive Species) is documented during the survey, Newfield will coordinate with to determine if any additional protection measures will be required. Alternatively, prior to surface disturbance activities within that year, Newfield will clear vegetation within the year of surface disturbance activities outside of the breeding season (April 1 through July 31).

For protection of T&E Fish if drawing water from the Green River

- For areas of fresh water collection, an infiltration gallery will be constructed in a Service approved location. An infiltration gallery is basically a pit or trench dug within the floodplain to a depth below the water table. Water is drawn from the pit rather than from the river directly. If this is not possible, limit pumping within the river to off-channel locations that do not connect to the river during high spring flows.
- If water cannot be drawn using the measures above and the pump head will be located in the river channel where larval fish are known to occur, the following measures apply:
 - Avoid pumping from low-flow or no-flow areas as these habitats tend to concentrate larval fish
 - Avoid pumping to the greatest extent possible, during that period of the year when larval fish may be present (see previous bullet); and
 - Avoid pumping, to the greatest extent possible, during the midnight hours (10:00 p.m. to 2:00 a.m.) as larval drift studies indicate that this is a period of greatest daily activity. Dusk is the preferred pumping time, as larval drift abundance is lowest during this time.
 - Screen all pump intakes with 3/32-inch mesh material.
 -
- Report any fish impinged on the intake screen to the FWS office (801.975.3330) and the:
Utah Division of Wildlife Resources
Northeastern Region
152 East 100 North
Vernal, UT 84078
(435) 781-9453

Air Quality

- All internal combustion equipment will be kept in good working order.
- Water or other approved dust suppressants will be used at construction sites and along roads, as determined appropriate by the Authorized Officer. Dust suppressant such as magnesium chloride or fresh water may be used, as needed, during the drilling phase.
- Open burning of garbage or refuse will not occur at well sites or other facilities.
- Drill rigs will be equipped with Tier II or better diesel engines.
- Low bleed pneumatics will be installed on separator dump valves and other controllers.
- During completion, no venting will occur, and flaring will be limited as much as possible. Production equipment and gathering lines will be installed as soon as possible.
- Telemetry will be installed to remotely monitor and control production.

- Signs will be installed on the access road, reducing speed to 25 MPH, during the drilling phase.
- When feasible, two or more rigs (including drilling and completion rigs) will not be run simultaneously within 200 meters of each other. If two or more rigs must be run simultaneously within 200 meters of each other, then effective public health buffer zones out to 200 meters (m) from the nearest emission source will be implemented. Examples of an effective public health protection buffer zone include the demarcation of a public access exclusion zone by signage at intervals of every 250 feet that is visible from a distance of 125 feet during daylight hours, and a physical buffer such as active surveillance to ensure the property is not accessible by the public during drilling operations. Alternatively, the proponent may demonstrate compliance with the 1-hour NO₂ National Ambient Air Quality Standards (NAAQS) with appropriate and accepted near-field modeling. As part of this demonstration, the proponent may propose alternative mitigation that could include but is not limited to natural gas-fired drill rigs, installation of NO_x controls, time/use restrictions, and/or drill rig spacing.
- All new and replacement internal combustion gas field engines of less than or equal to 300 design-rated horsepower must not emit more than 2 grams of NO_x per horsepower-hour. This requirement does not apply to gas field engines of less than or equal to 40 design-rated horsepower-hour.
- All new and replacement internal combustion gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 grams of NO_x per horsepower-hour.
- Green completions will be used for all well completion activities where technically feasible.
- Employ enhanced VOC emission controls with 95% control efficiency on production equipment having a potential to emit greater than 5 tons per year.

Threatened, Endangered and Candidate Plant Species

- Reinitiation of Section 7 consultation with the USFWS will be sought immediately if any loss of plants or occupied habitat for Pariette cactus or Uinta Basin hookless cactus is anticipated as a result of project activities.

**DOWNHOLE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

SITE SPECIFIC DOWNHOLE COAs:

- Newfield Production Co. shall adhere to all referenced requirements in the SOP (version: "Greater Monument Butte Green River Development Program", Feb 16, 2012). The operator shall also comply with applicable laws and regulations; with lease terms Onshore Oil and Gas Orders, NTL's; and with other orders and instructions of the, authorized officer.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each

encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.

- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to BLM_UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- For information regarding production reporting, contact the Office of Natural Resources Revenue (ONRR) at www.ONRR.gov.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location ($\frac{1}{4}$ $\frac{1}{4}$, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid,

and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# Ross 29 Submitted By
Branden Arnold Phone Number 435-401-0223

Well Name/Number GMBU I-31-8-18

Qtr/Qtr NE/NE Section 31 Township 8S Range 18E

Lease Serial Number UTU-74872

API Number 43-047-52598

Spud Notice – Spud is the initial spudding of the well, not drilling out below a casing string.

Date/Time 4/3/13 8:00 AM PM

Casing – Please report time casing run starts, not cementing times.

- Surface Casing
- Intermediate Casing
- Production Casing
- Liner
- Other

Date/Time 4/3/13 3:00 AM PM

BOPE

- Initial BOPE test at surface casing point
- BOPE test at intermediate casing point
- 30 day BOPE test
- Other

Date/Time _____ AM PM

Remarks _____

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

SUBMIT IN TRIPLICATE - Other Instructions on page 2

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
 NEWFIELD PRODUCTION COMPANY

3a. Address Route 3 Box 3630
 Myton, UT 84052

3b. Phone (include are code)
 435.646.3721

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
 0989 FNL 0664 FEL
 Section 31 T8S R18E NENE

5. Lease Serial No.
 USA UTU-74872

6. If Indian, Allottee or Tribe Name.

7. If Unit or CA/Agreement, Name and/or
 GMBU

8. Well Name and No.
 GMBU I-31-8-18

9. API Well No.
 4304752598

10. Field and Pool, or Exploratory Area
 GREATER MB UNIT

11. County or Parish, State
 Uintah, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug & Abandon	<input type="checkbox"/> Temporarily Abandon	Spud Notice _____
	<input type="checkbox"/> Convert to Injector	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	_____

13. Describe Proposed or Completed Operation: (Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

On 4/3/13 Ross #29 spud and drilled 327 of 12.25" hole, P/U and run 7 jts of 8 5/8" casing set 421.47' KB. On 4/4/13 cement w/ Baker Huges w/ 160 sks of class G +2%kcl+.25#CF mixed @15.8ppg and 1.17 yield. Returned 6bbls to pit, bump plug to 452psi, BLM and State were notified of spud via email

RECEIVED
APR 16 2013
DIV. OF OIL, GAS & MINING

I hereby certify that the foregoing is true and correct (Printed/ Typed)
 Signature: Branden Arnold
 Title: _____
 Date: 04/10/2013

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by: _____ Title: _____ Date: _____
 Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
 Office: _____

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious and fraudulent statements or representations as to any matter within its jurisdiction

Casing / Liner Detail

Well GMBU I-31-8-18
Prospect GMBU
Foreman
Run Date: 4/3/2013
String Type Conductor, 14", 36.75#, H-40, welded

- Detail From Top To Bottom -

Depth	Length	JTS	Description	OD	ID
29.00			10 ft KB		
10.00	19.00				
29.00					

Cement Detail

Cement Company:					
Slurry	# of Sacks	Weight (ppg)	Yield	Volume (ft³)	Description - Slurry Class and Additives
Stab-In-Job?			Cement To Surface?		
BHT:			Est. Top of Cement:		
Initial Circulation Pressure:			Plugs Bumped?		
Initial Circulation Rate:			Pressure Plugs Bumped:		
Final Circulation Pressure:			Floats Holding?		
Final Circulation Rate:			Casing Stuck On / Off Bottom?		
Displacement Fluid:			Casing Reciprocated?		
Displacement Rate:			Casing Rotated?		
Displacement Volume:			CIP:		
Mud Returns:			Casing Wt Prior To Cement:		
Centralizer Type And Placement:			Casing Weight Set On Slips:		

Casing / Liner Detail

Well GMBU I-31-8-18
Prospect GMBU
Foreman
Run Date:
String Type Surface, 8.625", 24#, J-55, STC (Generic)

- Detail From Top To Bottom -

Depth	Length	JTS	Description	OD	ID
421.47			10 ft kb		
10.00	1.42		wellhead		
11.42	364.30	6	surface casing	8.625	
375.72	44.85	1	shoe jt	8.625	
420.57	0.90		guide shoe	8.625	
421.47					

Cement Detail

Cement Company: BJ

Slurry	# of Sacks	Weight (ppg)	Yield	Volume (ft ³)	Description - Slurry Class and Additives
Slurry 1	160	15.8	1.17	187.2	Class G 2%kcl +.25CF mixed

Stab-In-Job?	No
BHT:	0
Initial Circulation Pressure:	
Initial Circulation Rate:	
Final Circulation Pressure:	
Final Circulation Rate:	
Displacement Fluid:	Water
Displacement Rate:	
Displacement Volume:	17.8
Mud Returns:	
Centralizer Type And Placement:	
middle first, top of second and third for a total of three	

Cement To Surface?	Yes
Est. Top of Cement:	0
Plugs Bumped?	Yes
Pressure Plugs Bumped:	452
Floats Holding?	No
Casing Stuck On / Off Bottom?	No
Casing Reciprocated?	No
Casing Rotated?	No
CIP:	8:48
Casing Wt Prior To Cement:	
Casing Weight Set On Slips:	

BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# NDSI SS # 2
Submitted By Justin Crum Phone Number 435-823-6732
Well Name/Number GMBU I-31-8-18
Qtr/Qtr NENE Section 31 Township 8S Range 18E
Lease Serial Number UTU-74872
API Number 43-047-52598

Rig Move Notice – Move drilling rig to new location.

Date/Time 5/1/2013 7:00 AM PM

BOPE

- Initial BOPE test at surface casing point
- BOPE test at intermediate casing point
- 30 day BOPE test
- Other

Date/Time 5/1/2013 11:00 AM PM

Remarks _____

RECEIVED

APR 29 2013

DIV. OF OIL, GAS & MINING

BLM - Vernal Field Office - Notification Form

Operator Newfield Exploration Rig Name/# NDSI SS # 2
Submitted By Jim Smith Phone Number 823-2072
Well Name/Number GMBU I-31-8-18
Qtr/Qtr NE/NE Section 31 Township 8S Range 18E
Lease Serial Number UTU-74872
API Number 43-047-52598

TD Notice – TD is the final drilling depth of hole.

Date/Time 5/3/2013 9:00 AM PM

Casing – Please report time casing run starts, not cementing times.

- Surface Casing
- Intermediate Casing
- Production Casing
- Liner
- Other

Date/Time 5/4/2013 7:00 AM PM

RECEIVED
MAY 04 2013
DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9	
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-74872	
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
1. TYPE OF WELL Oil Well		7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)	
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY		8. WELL NAME and NUMBER: GMBU I-31-8-18	
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052		9. API NUMBER: 43047525980000	
PHONE NUMBER: 435 646-4825 Ext		9. FIELD and POOL or WILDCAT: MONUMENT BUTTE	
4. LOCATION OF WELL FOOTAGES AT SURFACE: 0989 FNL 0664 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NENE Section: 31 Township: 08.0S Range: 18.0E Meridian: S		COUNTY: UINTAH	
		STATE: UTAH	
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start: <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input checked="" type="checkbox"/> DRILLING REPORT Report Date: 6/4/2013	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input checked="" type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.			
The above well was placed on production on 06/04/2013 at 16:00 hours.			
Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY June 06, 2013			
NAME (PLEASE PRINT) Jennifer Peatross		PHONE NUMBER 435 646-4885	TITLE Production Technician
SIGNATURE N/A		DATE 6/5/2013	

Form 3160-4
(August 2007)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB NO. 1004-0137
Expires: July 31, 2010

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5. Lease Serial No.
UTU-74872

1a. Type of Well Oil Well Gas Well Dry Other
1b. Type of Completion: New Well Work Over Deepen Plug Back Diff. Resvr.,
Other: _____

6. If Indian, Allottee or Tribe Name

7. Unit or CA Agreement Name and No.
GMBU (GRRV)

2. Name of Operator
NEWFIELD EXPLORATION COMPANY

8. Lease Name and Well No.
GMBU I-31-8-18

3. Address
1401 17TH ST SUITE 1000 DENVER, CO 80202

3a. Phone No. (include area code)
(435) 646-3721

9. API Well No.
43-047-52598

4. Location of Well (Report location clearly and in accordance with Federal requirements)*

At surface 989' FNL & 664' FEL (NE/NE) SEC. 31, T8S, R18E (UTU-74872)

At top prod. interval reported below 1432' FNL & 1183' FEL (SE/NE) SEC. 31, T8S, R18E (UTU-74872)

At total depth 1634' FNL & 1474' FEL (SW/NE) SEC. 31, T8S, R18E (UTU-74872)

10. Field and Pool or Exploratory
MONUMENT BUTTE

11. Sec., T., R., M., on Block and
Survey or Area
SEC 31, T8S, R18E

12. County or Parish
UINTAH

13. State
UT

14. Date Spudded
04/03/2013

15. Date T.D. Reached
05/05/2013

16. Date Completed 06/04/2013
 D & A Ready to Prod.

17. Elevations (DF, RKB, RT, GL)*
5001' GL 5011' KB

18. Total Depth: MD 6504'
TVD 6409'

19. Plug Back T.D.: MD 6445'
TVD

20. Depth Bridge Plug Set: MD
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)
DUAL IND GRD, SP, COMP. DENSITY, COMP. NEUTRON, GR, CALIPER, CMT BOND

22. Was well cored? No Yes (Submit analysis)
Was DST run? No Yes (Submit report)
Directional Survey? No Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sks. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12-1/4"	8-5/8" J-55	24#	0	321'		160 CLASS G			
7-7/8"	5-1/2" J-55	15.5#	0	6491'		480 50/50 POZ 260 PREMLITE		60'	

24. Tubing Record

Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)	Size	Depth Set (MD)	Packer Depth (MD)
2-7/8"	EOT @ 6227'	TA @ 6129'						

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) Green River	4519' MD	6191' MD	4519-6191' MD	0.34"	74	
B)						
C)						
D)						

26. Perforation Record

27. Acid, Fracture, Treatment, Cement Squeeze, etc.

Depth Interval	Amount and Type of Material
4519-6191' MD	Frac w/ 393744#s 20/40 white sand in 3239 bbls of Lightning 17 fluid, in 4 stages.

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
6/5/13	6/15/13	24	→	78	58	48			2-1/2" x 1-3/4" x 20' x 21' x 24' RHAC Pump
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→					PRODUCING	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

*(See instructions and spaces for additional data on page 2)

28b. Production - Interval C									
Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

28c. Production - Interval D									
Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	
			→						

29. Disposition of Gas (Solid, used for fuel, vented, etc.)

SOLD AND USED FOR FUEL

30. Summary of Porous Zones (Include Aquifers):

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

GEOLOGICAL MARKERS


Formation	Top	Bottom	Descriptions, Contents, etc.	Name	Top
					Meas. Depth
				GARDEN GULCH MRK GARDEN GULCH 1	4143' 4313'
				GARDEN GULCH 2 POINT 3	4432' 4703'
				X MRKR Y MRKR	4925' 4961'
				DOUGLAS CREEK MRK BI CARBONATE MRK	5095' 5334'
				CASTLE PEAK BASAL CARBONATE	5932' 6352'

32. Additional remarks (include plugging procedure):

33. Indicate which items have been attached by placing a check in the appropriate boxes:

- Electrical/Mechanical Logs (1 full set req'd.)
 Geologic Report
 DST Report
 Directional Survey
 Sundry Notice for plugging and cement verification
 Core Analysis
 Other: Drilling Daily Activity

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions)*

Name (please print) Jennifer Peatross Title Production Technician
 Signature  Date 06/27/2013

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 3)

(Form 3160-4, page 2)



NEWFIELD EXPLORATION

USGS MYTON SW (UT)
SECTION 31 T8S, R18E
1-31-8-18
Wellbore #1

Design: Actual

End of Well Report

14 May, 2013





Payzone Directional
End of Well Report



Company: NEWFIELD EXPLORATION
Project: USGS Myton SW (UT)
Site: SECTION 31 T8S, R18E
Well: I-31-B-18
Wellbore: Wellbore #1
Design: Actual

Local Co-ordinate Reference: Well I-31-B-18
TVD Reference: Mean Sea Level
MD Reference: I-31-B-18 @ 5110.0ft (NDSI SS #2)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: EDM 2003.21 Single User Db

Project: USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA
Map System: US State Plane 1983
Geo Datum: North American Datum 1983
Map Zone: Utah Central Zone
System Datum: Mean Sea Level

Site: SECTION 31 T8S, R18E
Site Position: Lat/Long Northing: 7,201,349.38 ft Easting: 2,079,946.45 ft Slot Radius: #
Position Uncertainty: 0.0 ft
Well: I-31-B-18, SHL LAT: 40 04 44.30 LONG: -109 55 45.12
Well Position: +N/S 0.0 ft +E/W 0.0 ft
Position Uncertainty: 0.0 ft
 Northing: 7,201,349.01 ft Easting: 2,079,926.24 ft Wellhead Elevation: 5,110.0 ft
 Latitude: 40° 4' 44.300 N Longitude: 109° 55' 45.120 W Ground Level: 5,100.0 ft

Wellbore: Wellbore #1
Magnetics: Model Name IGRF2010 Sample Date 8/16/2011 Declination (°) 11.24 Dip Angle (°) 65.85 Field Strength (mT) 52.294

Design: Actual
Audit Notes: Version: 1.0 Phase: ACTUAL Tie On Depth: 0.0
Vertical Section: Depth From (TVD) (ft) -5,110.0 +N/S (ft) 0.0 +E/W (ft) 0.0 Direction (°) 231.45

Survey Program	Date	From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description
348.0	5/14/2013	6,504.0		Survey #1 (Wellbore #1)	MWD	MWD - Standard

RECEIVED: Jan. 30, 2014



Payzone Directional
End of Well Report



Company: NEWFIELD EXPLORATION
 Project: USGS Mydon SW (UT)
 Site: SECTION 31 T9S, R18E
 Well: L-31-8-18
 Wellbore: Wellbore #1
 Design: Actual

Local Co-ordinate Reference: Well L-31-8-18
 TVD Reference: Mean Sea Level
 MD Reference: L-31-8-18 @ 5110.0ft (NDSI SS #2)
 North Reference: True
 Survey Calculation Method: Minimum Curvature
 Database: EDM 2003.21 Single User Db

Survey	MD (ft)	Inc (°)	Azi (azimuth) (°)	TVD (ft)	V. Sec (ft)	N/S (ft)	EW (ft)	DLeg (°/100ft)	Buil (°/100ft)	Turn (°/100ft)
	0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
	348.0	0.90	266.20	348.0	2.2	-0.2	-2.7	0.26	0.26	0.00
	378.0	0.70	262.10	378.0	2.6	-0.2	-3.1	0.69	-0.67	-13.67
	408.0	1.10	221.60	408.0	3.0	-0.5	-3.5	2.42	1.33	-135.00
	439.0	1.90	202.30	439.0	3.8	-1.2	-3.9	3.02	2.58	-62.26
	469.0	2.20	196.90	468.9	4.7	-2.2	-4.3	1.19	1.00	-18.00
	500.0	2.29	200.00	499.9	5.7	-3.3	-4.6	0.49	0.29	10.00
	530.0	2.20	200.60	529.9	6.7	-4.4	-5.1	0.31	-0.30	2.00
	560.0	2.10	199.80	559.9	7.7	-5.5	-5.4	0.34	-0.33	-2.33
	590.0	2.10	187.90	589.9	8.5	-6.5	-5.7	1.46	0.00	-40.00
	621.0	2.50	181.40	620.8	9.4	-7.8	-5.8	1.54	1.29	-20.97
	652.0	2.90	179.50	651.8	10.3	-9.2	-5.8	1.32	1.29	-6.13
	683.0	3.30	186.10	682.8	11.4	-10.9	-5.9	1.62	1.29	18.06
	713.0	3.80	183.80	712.7	12.7	-12.8	-6.0	1.69	1.67	-4.33
	743.0	4.70	187.30	742.6	14.2	-15.0	-6.3	3.12	3.00	11.67
	773.0	5.30	191.00	772.5	16.2	-17.6	-6.7	2.27	2.00	12.33
	803.0	6.00	191.50	802.4	18.4	-20.5	-7.2	2.34	2.33	1.67
	833.0	6.60	194.00	832.2	21.0	-23.7	-8.0	2.20	2.00	8.33
	862.0	6.80	196.70	861.0	23.7	-26.9	-8.9	1.29	0.69	9.31
	892.0	6.90	198.40	890.8	26.7	-30.3	-10.0	0.75	0.33	5.67
	922.0	7.30	200.60	920.5	29.8	-33.8	-11.2	1.61	1.33	7.33
	952.0	7.60	205.30	950.3	33.3	-37.4	-12.7	2.26	1.00	15.67
	983.0	7.70	206.20	981.0	37.0	-41.1	-14.5	0.50	0.32	2.90
	1,013.0	8.10	209.00	1,010.7	40.7	-44.8	-16.4	1.85	1.33	9.33
	1,057.0	8.20	217.60	1,054.3	46.7	-50.0	-19.8	2.78	0.23	19.55
	1,101.0	8.70	222.50	1,097.8	53.0	-54.9	-24.0	1.99	1.14	11.14
	1,144.0	9.40	227.80	1,140.3	59.7	-59.7	-28.8	2.53	1.63	12.33



Payzone Directional
End of Well Report



Company: NEWFIELD EXPLORATION
Project: USGS Mylon SW (UT)
Site: SECTION 31 T8S, R18E
Well: L-31-8-18
Wellbore: Wellbore #1
Design: Actual

Local Co-ordinate References:
TVD Reference: Well L-31-8-18
MD Reference: Mean Sea Level
North Reference: L-31-8-18 @ 5110.0ft (NDSI SS #2)
Survey Calculation Method: True
Database: Minimum Curvature
EDM 2003.21 Single User Db

Survey	MD (ft)	Inc (°)	Azi (azimuth) (°)	TVD (ft)	V. Sec (ft)	N/S (ft)	EW (ft)	Dleg (°/100ft)	Build (°/100ft)	Turn (°/100ft)
	1,188.0	9.40	229.40	1,183.7	66.9	-64.4	-34.2	0.59	0.00	3.64
	1,233.0	10.10	233.50	1,228.0	74.5	-69.2	-40.1	2.19	1.56	9.11
	1,276.0	10.70	234.20	1,270.3	82.3	-73.7	-46.4	1.43	1.40	1.53
	1,320.0	10.70	234.10	1,313.6	90.4	-78.5	-53.0	0.04	0.00	-0.23
	1,364.0	10.80	236.20	1,356.8	98.6	-83.2	-59.6	0.92	0.23	4.77
	1,407.0	10.70	236.20	1,399.0	106.6	-87.7	-66.4	0.23	-0.23	0.00
	1,451.0	10.70	236.40	1,442.3	114.7	-92.2	-73.2	0.08	0.00	0.45
	1,495.0	10.70	235.50	1,485.5	122.9	-96.8	-80.0	0.38	0.00	-2.05
	1,539.0	10.70	236.40	1,528.7	131.0	-101.4	-86.8	0.38	0.00	2.05
	1,583.0	10.60	235.80	1,572.0	139.1	-105.9	-93.5	0.34	-0.23	-1.36
	1,626.0	10.40	237.10	1,614.3	146.9	-110.2	-100.1	0.72	-0.47	3.02
	1,670.0	10.50	235.70	1,657.5	154.9	-114.6	-106.7	0.62	0.23	-3.18
	1,714.0	10.80	235.90	1,700.8	163.0	-119.2	-113.4	0.69	0.68	0.45
	1,758.0	10.80	237.80	1,744.0	171.2	-123.7	-120.3	0.81	0.00	4.32
	1,802.0	10.70	235.20	1,787.2	179.4	-128.2	-127.2	1.13	-0.23	-5.91
	1,845.0	11.00	234.50	1,829.4	187.5	-132.9	-133.8	0.76	0.70	-1.63
	1,889.0	10.80	233.10	1,872.7	195.8	-137.8	-140.5	0.75	-0.45	-3.18
	1,933.0	10.60	232.70	1,915.9	203.9	-142.7	-147.0	0.48	-0.45	-0.91
	1,977.0	10.40	232.20	1,959.1	211.9	-147.6	-153.4	0.50	-0.45	-1.14
	2,021.0	10.20	231.80	2,002.4	219.8	-152.5	-159.6	0.48	-0.45	-0.91
	2,064.0	10.20	232.00	2,044.8	227.4	-157.2	-165.6	0.08	0.00	0.47
	2,108.0	9.70	228.90	2,088.1	235.0	-162.0	-171.4	1.66	-1.14	-7.05
	2,152.0	9.60	228.80	2,131.5	242.4	-166.9	-177.0	0.23	-0.23	-0.23
	2,196.0	9.60	228.30	2,174.9	249.7	-171.7	-182.5	0.19	0.00	-1.14
	2,240.0	9.00	227.30	2,218.3	256.8	-176.5	-187.7	1.41	-1.36	-2.27
	2,283.0	9.60	228.60	2,260.7	263.8	-181.1	-192.9	1.48	1.40	3.02
	2,327.0	9.80	231.30	2,304.1	271.2	-185.9	-198.6	1.13	0.45	6.14

RECEIVED: Jan. 30, 2014



Payzone Directional
End of Well Report



Company: NEWFIELD EXPLORATION
Project: USGS Mydon SW (UT)
Site: SECTION 31 T8S, R18E
Well: I-31-B-18
Wellbore: Wellbore #1
Design: Actual

Local Co-ordinate References:
TVD Reference: Well I-31-B-18
MD Reference: Mean Sea Level
North Reference: I-31-B-18 @ 5110.0ft (NDSI SS #2)
Survey Calculation Method: True
Database: Minimum Curvature
EDM 2003.21 Single User Db

Survey	MD (ft)	Inc (°)	Azi (azimuth)	TVD (ft)	V. Sec (ft)	N/S (ft)	EW (ft)	DLag (ft/100ft)	Bulld (ft/100ft)	Tum (ft/100ft)
	2,371.0	9.70	233.70	2,347.5	278.6	-190.4	-204.5	0.95	-0.23	5.45
	2,415.0	10.40	232.10	2,390.8	286.3	-195.1	-210.6	1.71	1.59	-3.64
	2,459.0	10.90	231.90	2,434.0	294.4	-200.1	-217.0	1.14	1.14	-0.45
	2,502.0	10.70	233.00	2,476.3	302.5	-205.0	-223.4	0.67	-0.47	2.56
	2,546.0	11.30	233.40	2,519.4	310.9	-210.0	-230.1	1.37	1.36	0.91
	2,590.0	11.70	234.00	2,562.6	319.6	-215.2	-237.2	0.95	0.91	1.36
	2,634.0	12.00	232.80	2,605.6	328.7	-220.6	-244.5	0.88	0.68	-2.73
	2,678.0	12.10	233.60	2,648.7	337.8	-226.1	-251.8	0.44	0.23	1.82
	2,722.0	11.80	233.00	2,691.7	347.0	-231.6	-259.1	0.74	-0.68	-1.36
	2,765.0	11.40	229.10	2,733.8	355.6	-237.0	-265.8	2.05	-0.93	-9.07
	2,809.0	10.80	229.70	2,777.0	364.1	-242.5	-272.3	1.39	-1.36	1.36
	2,853.0	10.50	227.70	2,820.2	372.2	-247.9	-278.4	1.08	-0.68	-4.55
	2,897.0	10.60	229.20	2,863.5	380.2	-253.2	-284.4	0.66	0.23	3.41
	2,941.0	11.00	230.50	2,906.7	388.5	-258.5	-290.7	1.06	0.91	2.95
	2,985.0	11.70	231.40	2,949.9	397.1	-264.0	-297.4	1.64	1.58	2.05
	3,028.0	12.20	231.10	2,991.9	406.0	-269.5	-304.4	1.17	1.16	-0.70
	3,072.0	11.60	231.00	3,035.0	415.1	-275.2	-311.4	1.36	-1.36	-0.23
	3,116.0	10.90	229.00	3,078.1	423.7	-280.8	-318.0	1.82	-1.59	-4.55
	3,160.0	10.60	230.10	3,121.4	431.9	-286.1	-324.3	0.83	-0.68	2.50
	3,204.0	10.20	229.30	3,164.6	439.8	-291.2	-330.3	0.97	-0.91	-1.82
	3,248.0	10.40	231.10	3,207.9	447.7	-296.3	-336.4	0.86	0.45	4.08
	3,292.0	10.30	235.60	3,251.2	455.6	-301.0	-342.7	1.65	-0.23	10.23
	3,336.0	10.10	236.70	3,293.5	463.2	-305.2	-349.0	0.65	-0.47	2.56
	3,379.0	10.60	237.70	3,336.8	471.0	-309.5	-355.7	1.21	1.14	2.27
	3,423.0	10.80	240.10	3,380.1	479.1	-313.7	-362.7	1.11	0.45	5.45
	3,466.0	10.70	238.50	3,422.3	487.1	-317.8	-369.6	0.73	-0.23	-3.72
	3,510.0	10.90	240.20	3,465.5	495.2	-322.0	-376.7	0.85	0.45	3.86



Payzone Directional
End of Well Report



Company: NEWFIELD EXPLORATION
Project: USGS Mylon SW (UT)
Site: SECTION 31 T8S, R18E
Well: L-31-B-18
Wellbore: Wellbore #1
Design: Actual

Local Co-ordinate Reference: Well L-31-B-18
TVD Reference: Mean Sea Level
MD Reference: L-31-B-18 @ 5110.0ft (NDSISS #2)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: EDM 2003.21 Single User Db

Survey	MD (ft)	Inc (°)	Azi (azimuth) (°)	TVD (ft)	V. Sec (ft)	N/S (ft)	E/W (ft)	Dleg (°/100ft)	Buld (°/100ft)	Turn (°/100ft)
	3,554.0	10.00	240.00	3,508.8	503.1	-326.0	-383.6	2.05	-2.05	-0.45
	3,598.0	10.70	238.00	3,552.1	511.0	-330.1	-390.3	1.79	1.59	-4.55
	3,642.0	11.40	237.20	3,595.3	519.4	-334.6	-397.5	1.63	1.59	-1.82
	3,686.0	11.20	234.70	3,638.4	527.9	-339.4	-404.6	1.20	-0.45	-5.68
	3,730.0	10.80	232.60	3,681.6	536.3	-344.4	-411.4	1.29	-0.91	-4.77
	3,773.0	10.20	227.80	3,723.9	544.2	-349.4	-417.4	2.47	-1.40	-11.16
	3,817.0	10.40	225.70	3,767.2	552.0	-354.8	-423.1	0.97	0.45	-4.77
	3,861.0	10.80	226.50	3,810.4	560.1	-360.4	-428.9	0.97	0.91	1.82
	3,905.0	10.50	226.10	3,853.7	568.1	-366.1	-434.8	0.90	-0.88	-3.18
	3,949.0	11.20	222.70	3,896.9	576.4	-372.0	-440.5	1.89	1.59	-5.45
	3,992.0	11.10	221.20	3,939.1	584.6	-378.2	-446.1	0.71	-0.23	-3.49
	4,036.0	10.70	221.40	3,982.3	592.7	-384.5	-451.6	0.91	-0.91	0.45
	4,080.0	10.40	223.40	4,025.5	600.7	-390.4	-457.0	1.08	-0.68	4.55
	4,124.0	10.20	223.40	4,068.8	608.5	-396.1	-462.4	0.45	-0.45	0.00
	4,168.0	10.80	222.00	4,112.1	616.4	-402.0	-467.8	1.48	1.36	-3.18
	4,212.0	10.90	223.10	4,155.3	624.6	-408.1	-473.4	0.52	0.23	2.50
	4,256.0	10.50	224.60	4,197.5	632.5	-413.9	-479.0	1.13	-0.93	3.49
	4,299.0	10.30	228.50	4,240.8	640.4	-419.3	-484.7	1.66	-0.45	8.66
	4,343.0	10.70	230.70	4,284.1	648.4	-424.5	-490.8	1.29	0.91	5.00
	4,387.0	10.70	236.20	4,327.3	656.6	-429.4	-497.4	2.32	0.00	12.50
	4,430.0	11.40	238.30	4,369.5	664.8	-433.8	-504.3	1.88	1.63	4.88
	4,474.0	11.50	238.60	4,412.7	673.5	-438.4	-511.8	0.26	0.23	0.68
	4,518.0	11.00	239.20	4,455.8	682.0	-442.9	-519.1	1.17	-1.14	1.36
	4,561.0	10.90	240.00	4,498.0	690.1	-447.0	-526.2	0.42	-0.23	1.66
	4,605.0	10.50	239.20	4,541.3	698.1	-451.1	-533.2	0.97	-0.91	-1.82
	4,649.0	10.60	236.90	4,584.5	706.1	-455.4	-540.0	0.98	0.23	-5.23
	4,693.0	10.50	234.40	4,627.8	714.2	-459.9	-546.7	1.06	-0.23	-5.68

RECEIVED: Jan. 30, 2014



Payzone Directional
End of Well Report



Company: NEWFIELD EXPLORATION
Project: USGS Mykon SW (UT)
Site: SECTION 31 T8S, R18E
Well: L-31-g-18
Wellbore: Wellbore #1
Design: Actual

Local Co-ordinate Reference:
TVD Reference:
MD Reference:
North Reference:
Survey Calculation Method:
Database:
Well L-31-g-18
Mean Sea Level
L-31-g-18 @ 5110.0ft (NDSI SS #2)
True
Minimum Curvature
EDM 2003.21 Single User Db

Survey	MD (ft)	Inc (°)	Azi (azimuth) (°)	TVD (ft)	V. Sec (ft)	N/S (ft)	EW (ft)	DLeg (°/100ft)	Buld (°/100ft)	Turn (°/100ft)
	4,737.0	10.90	234.70	4,671.0	722.3	-464.7	-553.3	0.92	0.91	0.68
	4,780.0	11.20	236.20	4,713.2	730.6	-469.3	-560.1	0.97	0.70	3.49
	4,824.0	11.00	234.60	4,756.4	739.0	-474.1	-567.1	0.83	-0.45	-3.64
	4,868.0	11.00	236.50	4,799.6	747.4	-478.9	-574.0	0.82	0.00	4.32
	4,912.0	11.50	237.40	4,842.7	755.9	-483.6	-581.2	1.20	1.14	2.05
	4,956.0	12.10	234.40	4,885.8	764.9	-488.6	-588.7	1.95	1.36	-6.82
	4,999.0	12.40	233.60	4,927.8	774.0	-494.0	-596.1	0.80	0.70	-1.86
	5,043.0	11.60	232.60	4,970.9	783.1	-499.5	-603.4	1.88	-1.02	-2.27
	5,088.0	11.20	231.50	5,015.0	792.0	-504.9	-610.4	1.01	-0.89	-2.44
	5,132.0	10.80	230.80	5,058.2	800.4	-510.2	-616.9	0.96	-0.91	-1.59
	5,176.0	11.20	228.40	5,101.4	808.8	-515.6	-623.3	1.38	0.91	-5.45
	5,220.0	11.50	230.90	5,144.5	817.5	-521.3	-629.9	1.31	0.68	5.68
	5,263.0	11.10	233.70	5,188.7	825.9	-526.4	-636.6	1.58	-0.83	6.51
	5,307.0	11.90	235.30	5,229.8	834.7	-531.5	-643.7	1.96	1.82	3.64
	5,351.0	11.90	234.00	5,272.8	843.7	-536.7	-651.1	0.61	0.00	-2.95
	5,375.2	11.46	232.93	5,298.6	848.6	-539.7	-655.1	2.03	-1.83	-4.40
L-31-g-18 TGT										
	5,395.0	11.10	232.00	5,316.0	852.5	-542.0	-658.1	2.03	-1.81	-4.72
	5,439.0	11.30	231.50	5,359.1	861.0	-547.3	-664.8	0.51	0.45	-1.14
	5,482.0	11.90	235.70	5,401.2	869.7	-552.4	-671.8	2.41	1.40	9.77
	5,526.0	11.30	234.00	5,444.3	878.5	-557.5	-679.0	1.57	-1.36	-3.86
	5,570.0	10.60	230.50	5,487.5	886.8	-562.6	-685.6	2.19	-1.59	-7.95
	5,614.0	11.10	223.50	5,530.8	895.1	-568.3	-691.7	3.20	1.14	-15.91
	5,657.0	11.30	221.30	5,572.9	903.3	-574.4	-697.3	1.10	0.47	-5.12
	5,701.0	10.40	223.70	5,616.1	911.5	-580.6	-702.9	2.29	-2.05	5.45
	5,745.0	8.90	226.00	5,659.5	918.8	-585.8	-708.1	3.52	-3.41	5.23
	5,789.0	8.40	228.90	5,703.0	925.8	-590.5	-713.2	1.55	1.14	6.59

RECEIVED: Jan. 30, 2014



Payzone Directional
End of Well Report



Company: NEWFIELD EXPLORATION
 Project: USGS Mylon SW (UT)
 Site: SECTION 31 T9S, R18E
 Well: L-31-8-18
 Wellbore: Wellbore #1
 Design: Actual

Local Co-ordinates Reference:
 TVD Reference:
 MID Reference:
 North Reference:
 Survey Calculation Method:
 Database:


Well L-31-8-18
 Mean Sea Level
 L-31-8-18 @ 5110.0ft (NDSI SS #2)
 True
 Minimum Curvature
 EDM 2003.21 Single User Db

Survey	MID (ft)	Inc (°)	Azi (azimuth) (°)	TVD (ft)	V. Sec (ft)	N/S (ft)	EW (ft)	Dleg (°/100ft)	Bulk (°/100ft)	Turn (°/100ft)
	5,833.0	10.20	233.00	5,746.3	933.3	-595.2	-719.1	2.41	1.82	9.32
	5,875.0	10.50	235.00	5,787.6	940.8	-599.7	-725.2	1.11	0.71	4.76
	5,918.0	9.70	235.10	5,831.0	948.5	-604.1	-731.5	1.82	-1.82	0.23
	5,963.0	9.70	239.50	5,874.3	955.9	-608.1	-737.7	1.68	0.00	10.00
	6,007.0	9.20	244.30	5,917.7	963.0	-611.5	-744.1	2.12	-1.14	10.91
	6,050.0	8.80	242.00	5,960.2	969.6	-614.5	-750.1	1.25	-0.99	-5.35
	6,094.0	8.30	244.50	6,003.7	976.4	-617.6	-756.3	1.45	1.14	5.68
	6,138.0	9.80	243.10	6,047.0	983.5	-620.9	-762.8	1.25	1.14	-3.18
	6,182.0	10.30	245.20	6,090.4	991.0	-624.2	-769.7	1.41	1.14	4.77
	6,226.0	9.80	243.30	6,133.7	998.5	-627.5	-776.6	1.36	-1.14	-4.32
	6,269.0	8.90	242.80	6,176.1	1,005.3	-630.7	-782.9	2.10	-2.09	-1.16
	6,313.0	8.50	243.70	6,219.6	1,011.8	-633.7	-788.8	0.96	-0.91	2.05
	6,357.0	7.50	242.20	6,263.2	1,017.8	-636.5	-794.3	2.32	-2.27	-3.41
	6,401.0	7.20	242.20	6,306.8	1,023.4	-639.1	-799.3	0.68	-0.68	0.00
	6,445.0	6.60	239.00	6,350.5	1,028.6	-641.7	-803.9	1.62	-1.36	-7.27
	6,452.0	6.50	238.70	6,357.5	1,029.4	-642.1	-804.5	1.51	-1.43	-4.29
	6,504.0	6.50	238.70	6,409.1	1,035.2	-645.2	-808.6	0.00	0.00	0.00



Checked By: _____ Approved By: _____ Date: _____



Project: USGS Myton SW (UT)
 Site: SECTION 31 T8S, R18E
 Well: I-31-8-18
 Wellbore: Wellbore #1
 Design: Actual



Azimuths to True North
 Magnetic North: 11.24°
 Magnetic Field
 Strength: 52294.2snT
 Dip Angle: 65.85°
 Date: 8/16/2011
 Model: IGRF2010

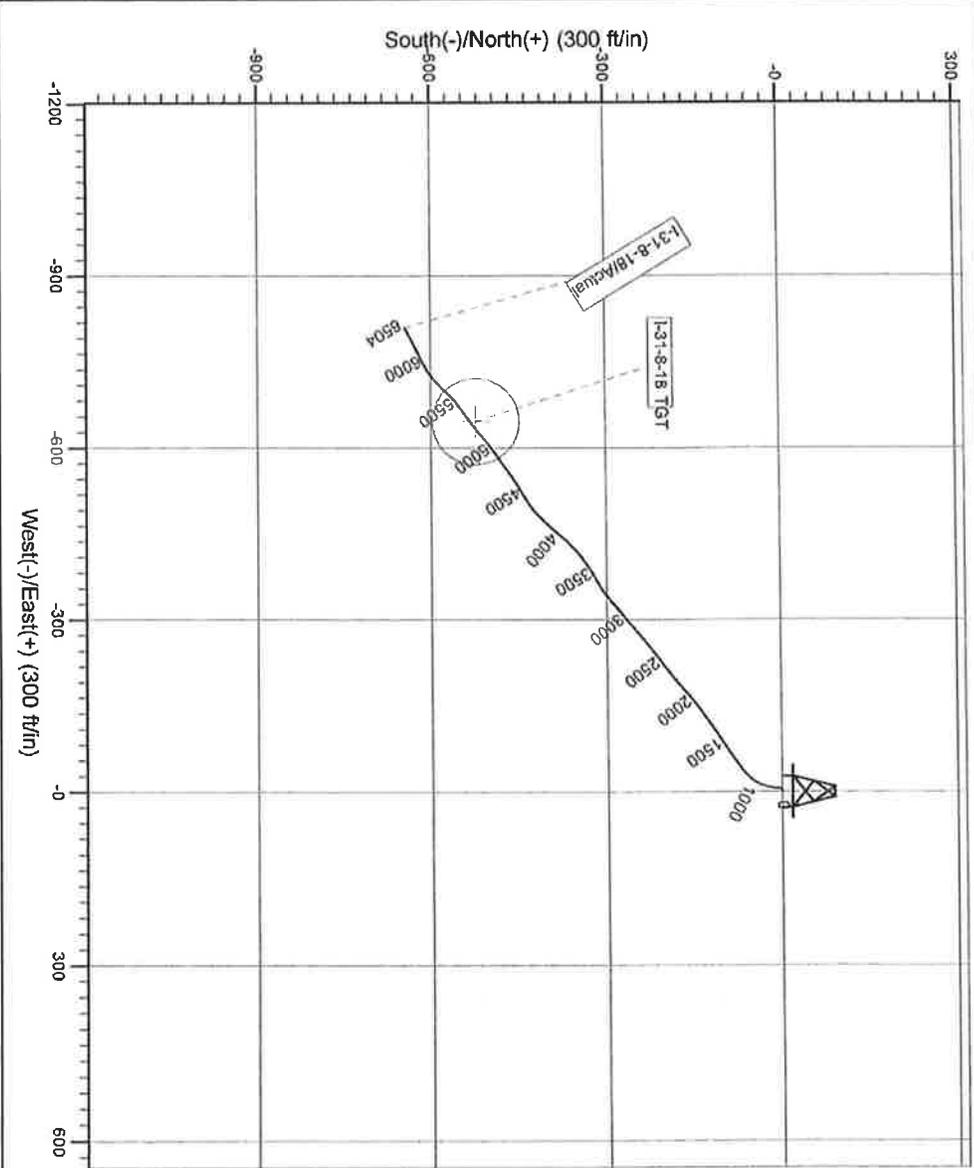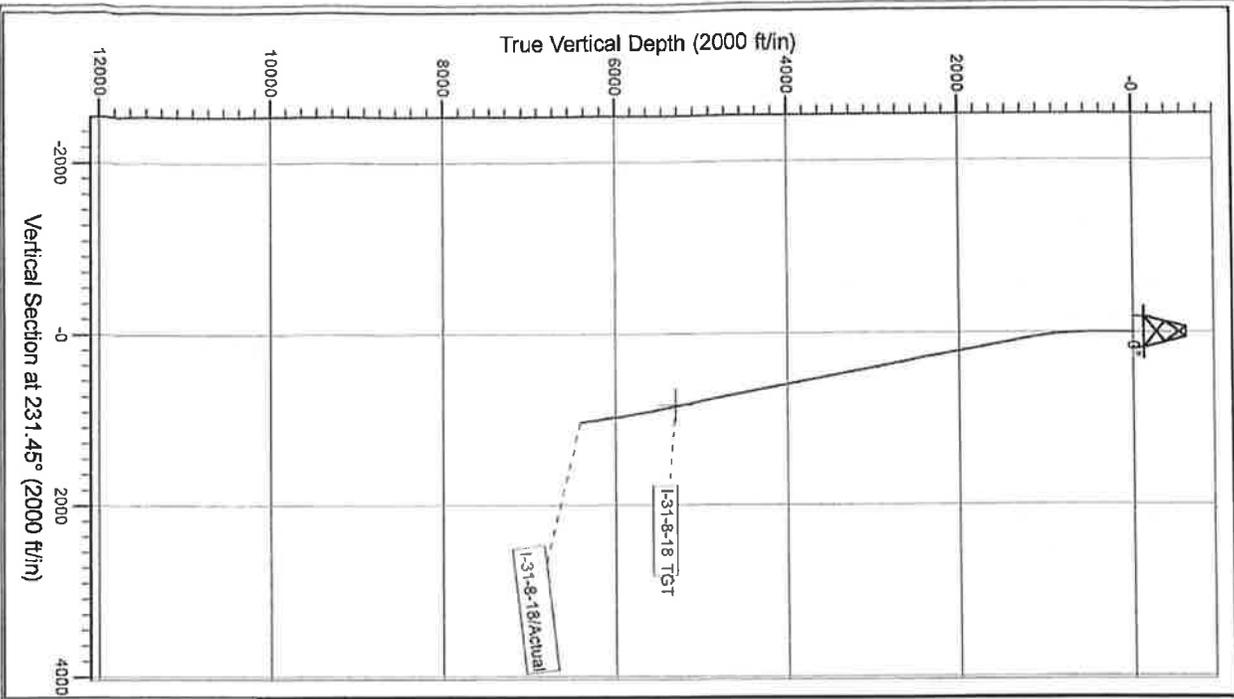

Design: Actual (I-31-8-18/Wellbore #1)
 Created By: Sarah White Date: 11:13, May 14 2013

THIS SURVEY IS CORRECT TO THE BEST OF
 MY KNOWLEDGE AND IS SUPPORTED
 BY ACTUAL FIELD DATA

Daily Activity Report**Format For Sundry****GMBU I-31-8-18****3/1/2013 To 7/30/2013****5/22/2013 Day: 1****Completion**

Rigless on 5/22/2013 - Run CBL w/ 0 psi, Estimated cmt top @ 158', Press test csg & frac stack, all good, Perf 1st stg. - RU 4G test unit, Test hyd chambers, Test csg, outer gate valves & FMC frac valve to 250 psi 5-min low & 4300 psi 30-min high, Test Knight single blind & flow back iron to 250 psi 5-min low & 4300 10-min high, All good, RD 4G test unit. - Hold pre-job safety meeting, RU Perforators wireline, MU & RIH w/ cement bond log tools, Tag @ 6372', PBTD @ 6445', Log w/ 0 psi, Log short joint @ 4036'-47', Estimated cement top @ 60', LD logging tools - RU perforators wireline, MU & RIH w/ 3 1/8" disposable slick guns (16g, 0.34 EH, 21.00 pen 2 spf), RIH 1000' & test lube to 800 psi, Good test, Continue in hole & perforate CP-4 formation @ 6189'-91', 6185'-86', 6160'-62' & CP-3 @ 6116'-18', 6091'-92', 6088'-89', POOH w/ wireline, SWI, RD wireline

Daily Cost: \$0**Cumulative Cost:** \$29,027**5/23/2013 Day: 2****Completion**

Rigless on 5/23/2013 - Pumped 4 of 4 stgs, Open well to pit & recover 720 bbls, No oil & well died, Pumped ttl of 3,322 bbls, (2,602 bbls left to recover) - RU Baker Hughes Frac Equip - (Stg #1) Hold pre-job safety meeting, Press test lines to 4800 psi, Open well w/ 12 psi, Break down CP-4 & CP-3 formations @ 3498 psi w/ 3.6 bbls 7% KCL @ 1.7 bpm, Pump 7.7 bbls 7% KCL & shut down for 1-4 min (ISIP 2236, F.G. .82, 1-min 1285 psi, 4-min 1083 psi), Pump 135.7 bbls 7% KCL & do step down (ISIP 1200 psi, F.G. .64) Pump 6 bbls 15% HCL, Pump ttl of 193.4 bbls 7% KCL to get to rate & find x-link, Pump 15 bbls 7% KCL to load screws, Pump 207.2 bbls 7% KCL 1-4# sand (ramped), Pumped 436.4 bbls 7% KCL 4-6# sand (ramped), Pumped 101.1 bbls 7% KCL 6# sand (hold), Pumped 12 bbls 15% HCL, Pumped 133.1 bbls 7% KCL slick water flush, Max psi 2739, Avg psi 2187, Max rate 38.7, Avg rate 38.3, ISIP 1801 psi, F.G. .75, Pumped total of 114,307# sand in formation, Pumped ttl of 997 bbls - (Stg #2) RU Perforators wireline, Press test lube to 4000 psi, MU & RIH W/ WFT 5 1/2" 6K CFTP & 3 1/8" Disposable slick guns (16g, 0.34 EH, 21.00 pen, 2 spf), RIH & Set CFTP @ 5920', Perforate LODC @ 5837'-38', 5826'-30', 5806'-08' & A-3 @ 5640'-42' (18 holes), POOH w/ wireline, SWI, RD wireline - (Stg #2) Hold pre-job safety meeting, Press test lines to 4800 psi, Open well w/ 1208 psi, Break down LODC & A-3 formations @ 1908 psi w/ 1.0 bbls 7% KCL @ 4.4 bpm, Do step down (ISIP 1706 psi, F.G. .75), Pump ttl of 104.2bbls 7% KCL to get to rate & find x-link, Pump 26.4 bbls 7% KCL to load screws, Pump 106 bbls 7% KCL 1-4# sand (ramped), Pumped 452.5 bbls 7% KCL 4-6# sand (ramped), Pumped 61.6 bbls 7% KCL 6# sand (hold), Pumped 12 bbls 15% HCL, Pumped 122.3 bbls 7% KCL slick water flush, Max psi 2622, Avg psi 2458, Max rate 34.5, Avg rate 31.5, ISIP 2257 psi, F.G. .85, Pumped total of 59,083# sand in formation, Pumped ttl of 617 bbls - (Stg #3) RU Perforators wireline, Press test lube to 4000 psi, MU & RIH W/ WFT 5 1/2" 6K CFTP & 3 1/8" Disposable slick guns (16g, 0.34 EH, 21.00 pen, 2 spf), RIH & Set CFTP @ 5540', Perforate B-2 @ 5465'-69' & B-1 @ 5440'-42', 5426'-28', 5421'-22' (18 holes), POOH w/ wireline, SWI, RD wireline - (Stg #3) Hold pre-job safety meeting, Press test lines to 4800 psi, Open well w/ 1007 psi, Break down B-1 & B-2 formations @ 1722 psi w/ 3.4 bbls 7% KCL @ 4.8 bpm, Do step down (ISIP 1070 psi, F.G. .65), Pump ttl of 132.7 bbls 7% KCL to get to rate & find x-link, Pump 15 bbls 7% KCL to load screws, Pump 210.5 bbls 7% KCL 1-4# sand (ramped), Pumped 402.4 bbls 7% KCL 4-6# sand (ramped), Pumped 101.8 bbls 7% KCL 6# sand (hold), Pumped 12 bbls 15% HCL, Pumped 117.2 bbls 7% KCL slick water flush, Max psi 2956, Avg psi 3098, Max rate 38.6, Avg rate 33.1, ISIP 1604 psi, F.G. .75, Pumped total of 129,511# sand in formation,

Pumped ttl of 991 bbls - (Stg #4) RU Perforators wireline, Press test lube to 4000 psi, MU & RIH w/ WFT 5 1/2" 6K CFTP & 3 1/8" Disposable slick guns (16g, 0.34 EH, 21.00 pen, 2 spf), RIH & Set CFTP @ 4770', Perforate GB-6 @ 4688'-92" & GB-4 @ 4641'-43, 4643'-36', 4629'-30' & GB-2 @ 4519'-20' (20 holes), POOH w/ wireline, SWI, RD wireline - (Stg #4) Hold pre-job safety meeting, Press test lines to 4800 psi, Open well w/ 995 psi, Break down GB-6, GB-4 & GB-2 formations @ 1220 psi w/ .8 bbls 7% KCL @ 4.3 bpm, Do step down (ISIP 1435 psi, F.G. .76), Pump ttl of 78.5 bbls 7% KCL to get to rate & find x-link, Pump 15 bbls 7% KCL to load screws, Pump 135.7 bbls 7% KCL 1-4# sand (ramped), Pumped 316.7 bbls 7% KCL 4-6# sand (ramped), Pumped 63.3 bbls 7% KCL 6# sand (hold), Pumped 107.8 bbls 7% KCL slick water flush, Max psi 3956, Avg psi 3098, Max rate 38.7, Avg rate 33.1, ISIP 1925 psi, F.G. .87, Pumped total of 95,388# sand in formation, Pumped ttl of 717 bbls - Open well to pit @ approx. 3 bpm, Recover 720 bbls fluid, No oil & well died out, Pumped total of 3,322 bbls, (FLUID LEFT TO RECOVER 2,602 BBLs)

Daily Cost: \$0

Cumulative Cost: \$157,874

5/24/2013 Day: 3

Completion

Rigless on 5/24/2013 - RU Perforators wireline, RIH & set kill plug @ 4430', Bleed off well & monitor for 30 min, Well dead - RU Perforators wireline, Check press on well 200 psi, MU & RIH w/ WFT 5 1/2" 6K kill plug, Set kill plug @ 4430', POOH w/ wireline, RD wireline, Bleed off well & monitor for 30 min, Well dead, SWI

Daily Cost: \$0

Cumulative Cost: \$205,979

5/29/2013 Day: 4

Completion

Nabors #1406 on 5/29/2013 - MIRUSU, ND frac valve & NU drill out BOPs, RU B&C test unit & test BOPs, PU tbg & drill out BHA, Drill out 2 plugs & circulate well clean. - RD FRAC VALVE, NU BOP - MIRUSU/ DERRICK INSPECTION - CREW TRAVEL - PU 4 3/4" CONCAVE MILL & 141-JTS 2 7/8" J-55 TBG, TAGGING KILL PLUG @ 4430' - STRIP ON WASHINGTON RUBBER, RU POWER SWIVEL, BUILD PUMP AND RETURN LINES, WAIT FOR WATER TO GET TRANSFERED, BREAK CIRCULATION - DRILL OUT KILL PLUG 10 MINUTES, NO PRESSURE UNDER PLUG, HANG SWIVEL BACK & PU 10 JNTS, TAGGING 2ND PLUG @ 4770', JNT 152, (NO FILL), DRILL OUT PLUG 15 MIN, NO PRESSURE, HANG SWIVEL BACK & PU 12 JNTS TAGGING FILL @ 5450', RU SWIVEL, GAULDED 2-JNTS IN WIND, ROLL HOLE CLEAN, SWIFN, SDFN - Crew Travel & Safety Meeting - RU B&C QUICK TEST, TEST HYD CHAMBERS & DOUBHLE PIPE RAMS & OUTER GATE VALVES, RU TBG EQUIPMENT, UNLOAD 212 JNTS 2 7/8" J -55 TBG, PREP TALLEY TBG

Daily Cost: \$0

Cumulative Cost: \$229,403

5/30/2013 Day: 6

Completion

Nabors #1406 on 5/30/2013 - Continue PU rods, Space out & seat pump, RU unit, Hang off rods, POP @ 11:30 - RIH w/ prod tbg as follows: 2 7/8" N/C, 2-jts 2 7/8" j-55 tbg, 2 7/8" PSN, 1-jt 2 7/8" j-55 tbg, 5 1/2" B2-C TAC (45K shear w/ carbide slips), 195-jts 2 7/8" j-55 tbg, MU hanger w/ 4' sub below hanger, Set TAC from floor, Land tbg on hanger. - LD extra 2 7/8" tbg, TOO H w/ tbg & drill out BHA - LD extra 2 7/8" tbg, TOO H w/ tbg & drill out BHA - Circulate well clean w/ 140 bbls - Circulate well clean w/ 140 bbls - Hang back swivel, PU 10-jts tbg, Tag fill @ 6245', (200' fill), RU power swivel, Clean out to PBDT @ 6445' - Hang back swivel, PU 10-jts tbg, Tag fill @ 6245', (200' fill), RU power swivel, Clean out to PBDT @ 6445' - Tbg & csg on vacuum, Swivel in 3-jts tbg, Tag 90' fill on 3rd plug, Clean out to plug @

5540', Drill out plug in 8-min, No press under plug, Circulate well clean, Hang back swivel, PU 12-jts tbg, Tag 4th plug @ 5290', No fill, No press under plug, Drill out plug in 15-min - Tbg & csg on vacuum, Swivel in 3-jts tbg, Tag 90' fill on 3rd plug, Clean out to plug @ 5540', Drill out plug in 8-min, No press under plug, Circulate well clean, Hang back swivel, PU 12-jts tbg, Tag 4th plug @ 5290', No fill, No press under plug, Drill out plug in 15-min - Crew Travel & Safety Meeting - Crew Travel & Safety Meeting - ** FINAL REPORT ** - Crew Travel & Safety Meeting - Crew Travel & Safety Meeting - CITP 0 psi, LD polish rod, Continue PU rods, Entire rod detail as follows: Central Hyd pump # NF 2414 (25-175-RHAC-20-4-21-24), 30 7/8" 8-per, 133 3/4" 4-per, 82 7/8" 4-per, 8' x 7/8" sub, 6' x 7/8" sub, 2' x 7/8" sub, 1 1/2" x 30' polish rod, Seat pump & stroke test to 800 psi, Good - CITP 0 psi, LD polish rod, Continue PU rods, Entire rod detail as follows: Central Hyd pump # NF 2414 (25-175-RHAC-20-4-21-24), 30 7/8" 8-per, 133 3/4" 4-per, 82 7/8" 4-per, 8' x 7/8" sub, 6' x 7/8" sub, 2' x 7/8" sub, 1 1/2" x 30' polish rod, Seat pump & stroke test to 800 psi, Good - Wait on mechanic to start pumping unit, Roll pumping unit, PU horses head, Hang off rods, PWOP @ 11:30, 144" stroke @ 5 spm - Wait on mechanic to start pumping unit, Roll pumping unit, PU horses head, Hang off rods, PWOP @ 11:30, 144" stroke @ 5 spm - RD rig, Prep to move to F-32-8-18 - RD rig, Prep to move to F-32-8-18 - RIH w/ prod tbg as follows: 2 7/8" N/C, 2-jts 2 7/8" j-55 tbg, 2 7/8" PSN, 1-jt 2 7/8" j-55 tbg, 5 1/2" B2-C TAC (45K shear w/ carbide slips), 195-jts 2 7/8" j-55 tbg, MU hanger w/ 4' sub below hanger, Set TAC from floor, Land tbg on hanger. - RD workfloor, ND BOPs, PU on tbg & remove 4' sub from below tbg hanger, Re-land tbg on hanger, TAC @ 6128' w/ 18 K tension, PSN @ 6162', EOT @ 6226' - RD workfloor, ND BOPs, PU on tbg & remove 4' sub from below tbg hanger, Re-land tbg on hanger, TAC @ 6128' w/ 18 K tension, PSN @ 6162', EOT @ 6226' - Install 2-way check in hanger, Test wellhead w/ rig pump to 800 psi, Good - Install 2-way check in hanger, Test wellhead w/ rig pump to 800 psi, Good - X-over to rod equip, Spot in rod trailer, PU & Prime Central Hydraulic Pump (2.5 x 1.75 x 24' x RHAC), Start in hloe w/ rods as follows: 30-7/8" 8-per, 133-3/4" 4-per, PU polish rod, SWI, SDFN - X-over to rod equip, Spot in rod trailer, PU & Prime Central Hydraulic Pump (2.5 x 1.75 x 24' x RHAC), Start in hloe w/ rods as follows: 30-7/8" 8-per, 133-3/4" 4-per, PU polish rod, SWI, SDFN - ** FINAL REPORT ** - Crew Travel - Crew Travel **Finalized**
Daily Cost: \$0
Cumulative Cost: \$319,757

Pertinent Files: Go to File List