

STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT

<b>APPLICATION FOR PERMIT TO DRILL</b>						<b>1. WELL NAME and NUMBER</b> UTE 16-10A-4-1				
<b>2. TYPE OF WORK</b> DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>						<b>3. FIELD OR WILDCAT</b> WINDY RIDGE				
<b>4. TYPE OF WELL</b> Oil Well Coalbed Methane Well: NO						<b>5. UNIT or COMMUNITIZATION AGREEMENT NAME</b>				
<b>6. NAME OF OPERATOR</b> FINLEY RESOURCES INC						<b>7. OPERATOR PHONE</b> 817 231-8735				
<b>8. ADDRESS OF OPERATOR</b> PO Box 2200, Fort Worth, TX, 76113						<b>9. OPERATOR E-MAIL</b> awilkerson@finleyresources.com				
<b>10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE)</b> 14-20-H62-4896			<b>11. MINERAL OWNERSHIP</b> FEDERAL <input type="checkbox"/> INDIAN <input checked="" type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>			<b>12. SURFACE OWNERSHIP</b> FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>				
<b>13. NAME OF SURFACE OWNER (if box 12 = 'fee')</b> Coleman, et al.						<b>14. SURFACE OWNER PHONE (if box 12 = 'fee')</b> 435-654-1666				
<b>15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')</b> 148 West Center Street,						<b>16. SURFACE OWNER E-MAIL (if box 12 = 'fee')</b>				
<b>17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')</b>			<b>18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS</b> YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>			<b>19. SLANT</b> VERTICAL <input checked="" type="checkbox"/> DIRECTIONAL <input type="checkbox"/> HORIZONTAL <input type="checkbox"/>				
<b>20. LOCATION OF WELL</b>		<b>FOOTAGES</b>		<b>QTR-QTR</b>	<b>SECTION</b>	<b>TOWNSHIP</b>	<b>RANGE</b>	<b>MERIDIAN</b>		
LOCATION AT SURFACE		1650 FSL 1650 FEL		NWSE	16	4.0 S	1.0 E	U		
Top of Uppermost Producing Zone		1650 FSL 1650 FEL		NWSE	16	4.0 S	1.0 E	U		
At Total Depth		1650 FSL 1650 FEL		NWSE	16	4.0 S	1.0 E	U		
<b>21. COUNTY</b> UINTAH			<b>22. DISTANCE TO NEAREST LEASE LINE (Feet)</b> 1650			<b>23. NUMBER OF ACRES IN DRILLING UNIT</b> 40				
<b>25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed)</b> 935			<b>26. PROPOSED DEPTH</b> MD: 8500 TVD: 8500			<b>29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE</b> 43-8496				
<b>27. ELEVATION - GROUND LEVEL</b> 5285			<b>28. BOND NUMBER</b> RLB 0011294							
<b>Hole, Casing, and Cement Information</b>										
String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement	Sacks	Yield	Weight
COND	17.5	13.375	0 - 60	48.0	H-40 ST&C	0.0	Class G	41	1.17	15.8
SURF	12.25	8.625	0 - 358	32.0	J-55 ST&C	8.6	Premium Lite High Strength	47	3.53	11.0
							Class G	111	1.17	15.8
PROD	7.875	5.5	0 - 8500	15.5	J-55 LT&C	9.5	50/50 Poz	961	1.24	13.2
<b>ATTACHMENTS</b>										
<b>VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES</b>										
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER					<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN					
<input checked="" type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)					<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER					
<input type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)					<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP					
<b>NAME</b> Don Hamilton				<b>TITLE</b> Agent			<b>PHONE</b> 435 719-2018			
<b>SIGNATURE</b>				<b>DATE</b> 05/14/2012			<b>EMAIL</b> starpoint@etv.net			
<b>API NUMBER ASSIGNED</b> 43047526680000				<b>APPROVAL</b>			 Permit Manager			

**Finley Resources, Inc.**  
**UTE 16-10A-4-1**  
**1650' FSL & 1650' FEL, NW/4 SE/4, Sec 16, T4S, R1E, U.S.B.&M.**  
**Uintah County, UT**

**Drilling Program**

**1. Formation Tops**

Surface	5,285'
Green River	2,455'
Black Shale	6,345'
Uteland Butte	6,875'
Wasatch	7,300'
TD	8,500'

**2. Depth to Oil, Gas, Water, or Minerals**

Black Shale	6,345' - 6,875'	(Oil)
Uteland Butte	6,875' - TD	(Oil)

Fresh water may be encountered in the Duchesne Formation, but is not expected below about 300'.

**3. Pressure Control**

Section                      BOP Description

Surface                      12-1/4" diverter

Interm/Prod              The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc for a 5M system.

A 5M BOP system will consist of 2 ram preventers (double or two singles) and an annular preventer (see attached diagram). A choke manifold rated to at least 5,000 psi will be used.

**4. Casing**

Description	Interval		Weight (ppf)	Grade	Coup	Pore Press @ Shoe	MW @ Shoe	Frac Grad @ Shoe	Safety Factors		
	Top	Bottom							Burst	Collapse	Tension
Conductor 13 3/8	0'	60'	48	H-40	STC	--	--	--	1,730	770	322,000
Surface 8 5/8	0'	358'	32	J-55	STC	8.33	8.6	11	3,930	2,530	417,000
Production 5 1/2	0'	8,500'	15.5	J-55	LTC	9	9.5	11	21.57	21.27	36.40
									4,810	4,040	217,000
									1.54	1.21	1.65

**Assumptions:**

Surface casing MASP = (frac gradient + 1.0 ppg) - (gas gradient)

Intermediate casing MASP = (reservoir pressure) - (gas gradient)

Production casing MASP = (reservoir pressure) - (gas gradient)

All collapse calculations assume fully evacuated casing with a gas gradient

All tension calculations assume air weight of casing

Gas gradient = 0.1 psi/ft

All casing shall be new.

All casing strings shall have a minimum of 1 centralizer on each of the bottom 3 joints.

**5. Cement**

Job	Hole Size	Fill	Slurry Description	ft <sup>3</sup>	OH excess	Weight (ppg)	Yield (ft <sup>3</sup> /sk)
				sacks			
Conductor	17 1/2	60'	Class G w/ 2% KCl + 0.25 lbs/sk Cello Flake	48	15%	15.8	1.17
				41			
Surface Lead	12 1/4	200'	Premium Lite II w/ 3% KCl + 10% bentonite	165	100%	11.0	3.53
				47			
Surface Tail	12 1/4	158'	Class G w/ 2% KCl + 0.25 lbs/sk Cello Flake	130	100%	15.8	1.17
				111			
Production Tail	7 7/8	5,500'	50/50 Poz/Class G w/ 3% KCl + 2% bentonite	1191	25%	13.2	1.24
				961			

The surface casing will be cemented to surface. In the event that cement does not reach surface during the primary cement job, a remedial job will be performed.

Actual cement volumes for the production casing string will be calculated from an open hole caliper log, plus 25% excess.

**6. Type and Characteristics of Proposed Circulating Medium****Interval                      Description**

Surface - 358'                      An air and/or fresh water system will be utilized.

358' - TD                      A water based mud system will be utilized. Hole stability may be improved with additions of KCl or a similar inhibitive substance. In order to control formation pressure the system will be weighted with additions of bentonite, and if conditions warrant, with barite.

Anticipated maximum mud weight is                      9.5 ppg.

**7. Logging, Coring, and Testing**

Logging: A dual induction, gamma ray, and caliper log will be run from TD to the base of the surface casing. A compensated neutron/formation density log will be run from TD to the top of the Garden Gulch formation. A cement bond log will be run from PBDT to the cement top behind the production casing.

Cores: As deemed necessary.

DST: There are no DST's planned for this well.

**8. Anticipated Abnormal Pressure or Temperature**

Maximum anticipated bottomhole pressure will be approximately equal to total depth (feet) multiplied by a 0.47 psi/ft gradient.

$$8,500' \times 0.47 \text{ psi/ft} = 3978 \text{ psi}$$

No abnormal temperature is expected. No H<sub>2</sub>S is expected.


**9. Other Aspects**

This is planned as a vertical well.

**CONFIDENTIAL**



### Access Road Map

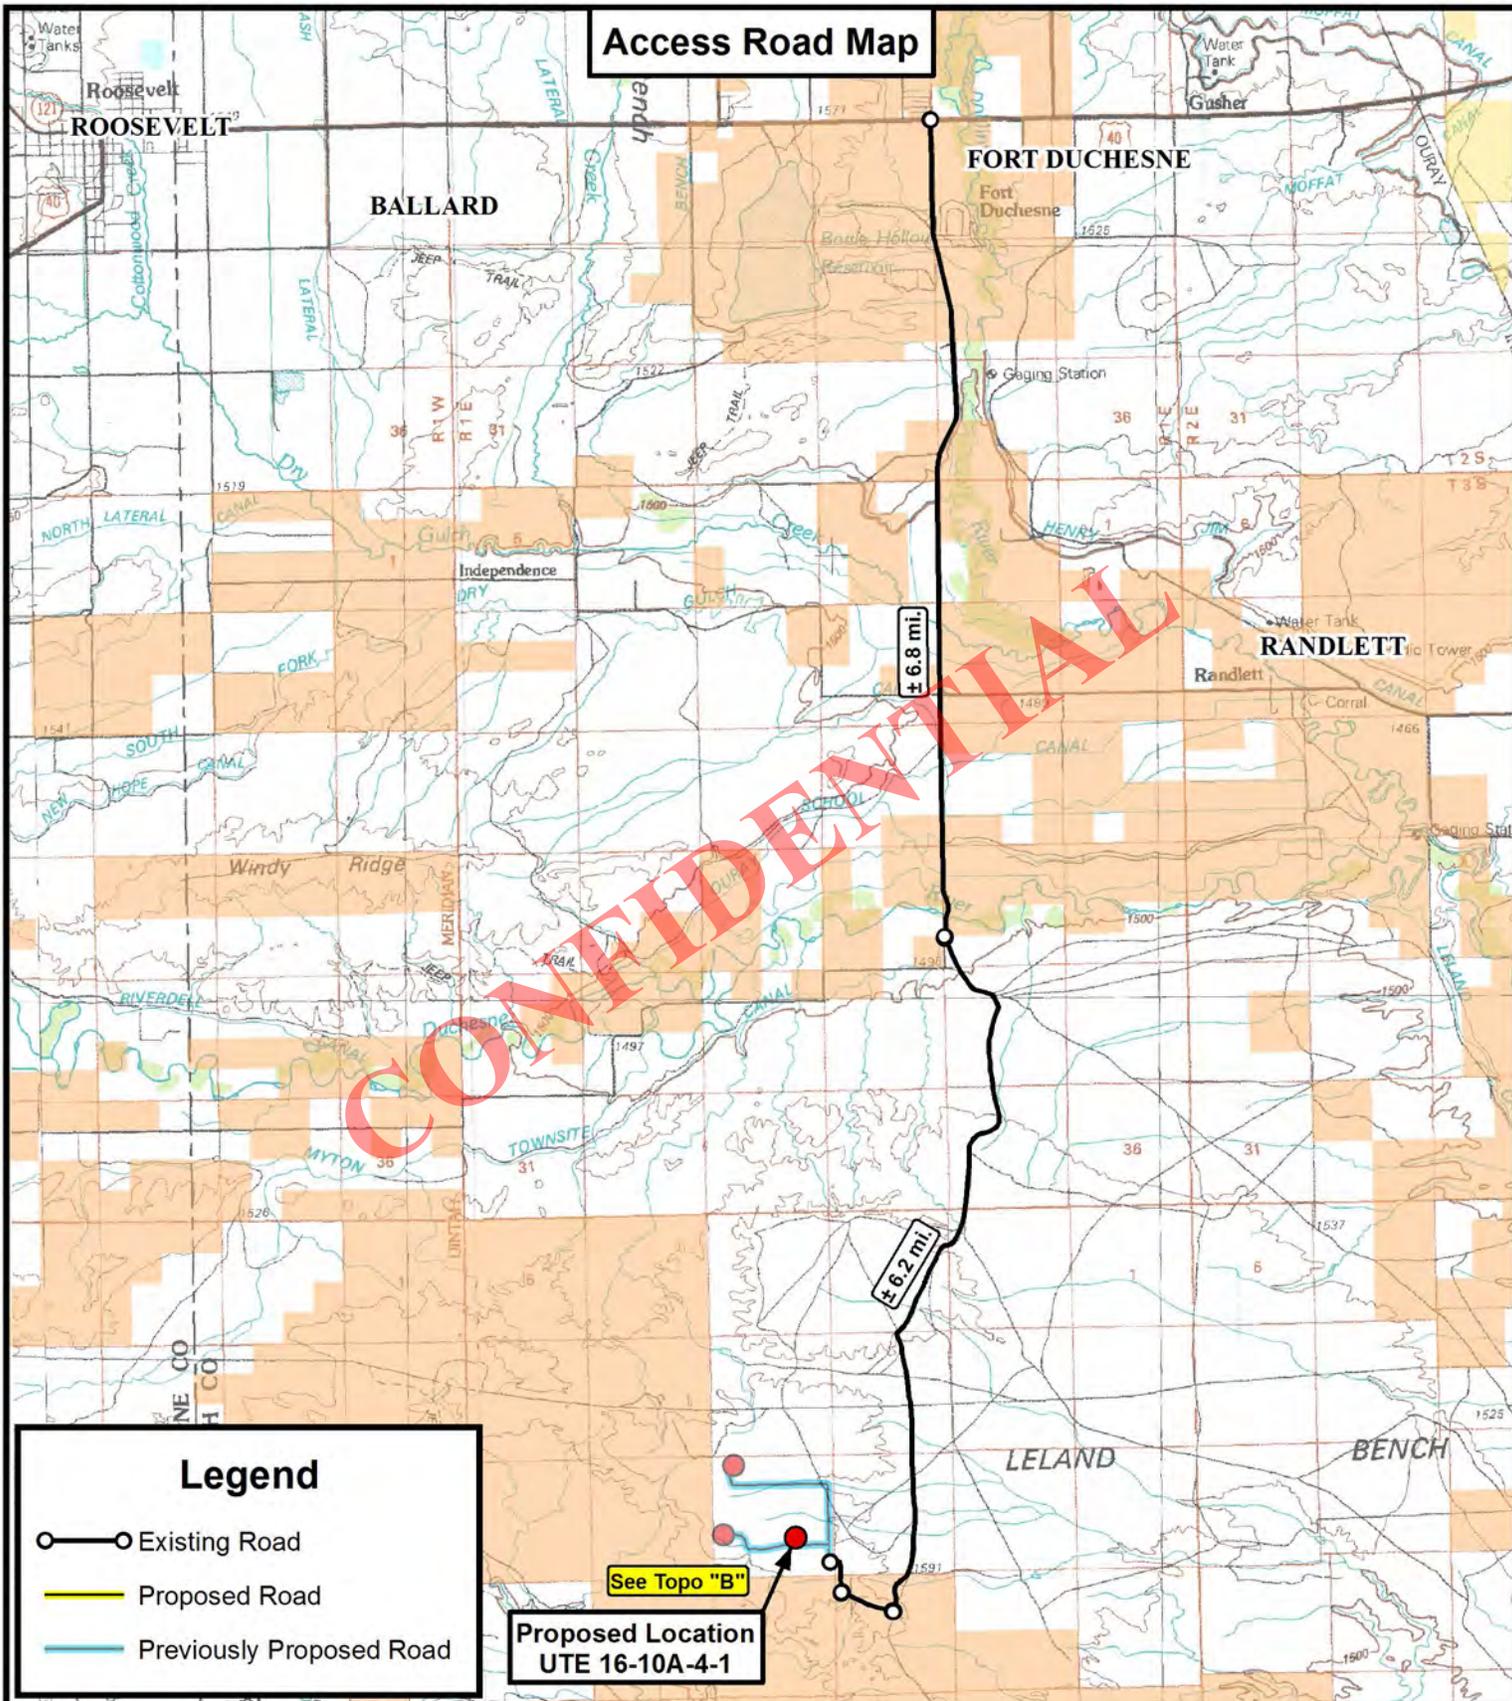

### Legend

- Existing Road
- Proposed Road
- Previously Proposed Road

See Topo "B"

Proposed Location  
UTE 16-10A-4-1



**Tri State  
Land Surveying, Inc.**

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
F: (435) 781-2518



### FINLEY RESOURCES INC.


UTE 16-10A-4-1  
SEC. 16, T4S, R1E, U.S.B.&M.  
Uintah County, UT.

DRAWN BY:	D.C.R.	REVISED:
DATE:	01-07-2012	
SCALE:	1:100,000	

**TOPOGRAPHIC MAP**

SHEET  
**A**

**Access Road Map**

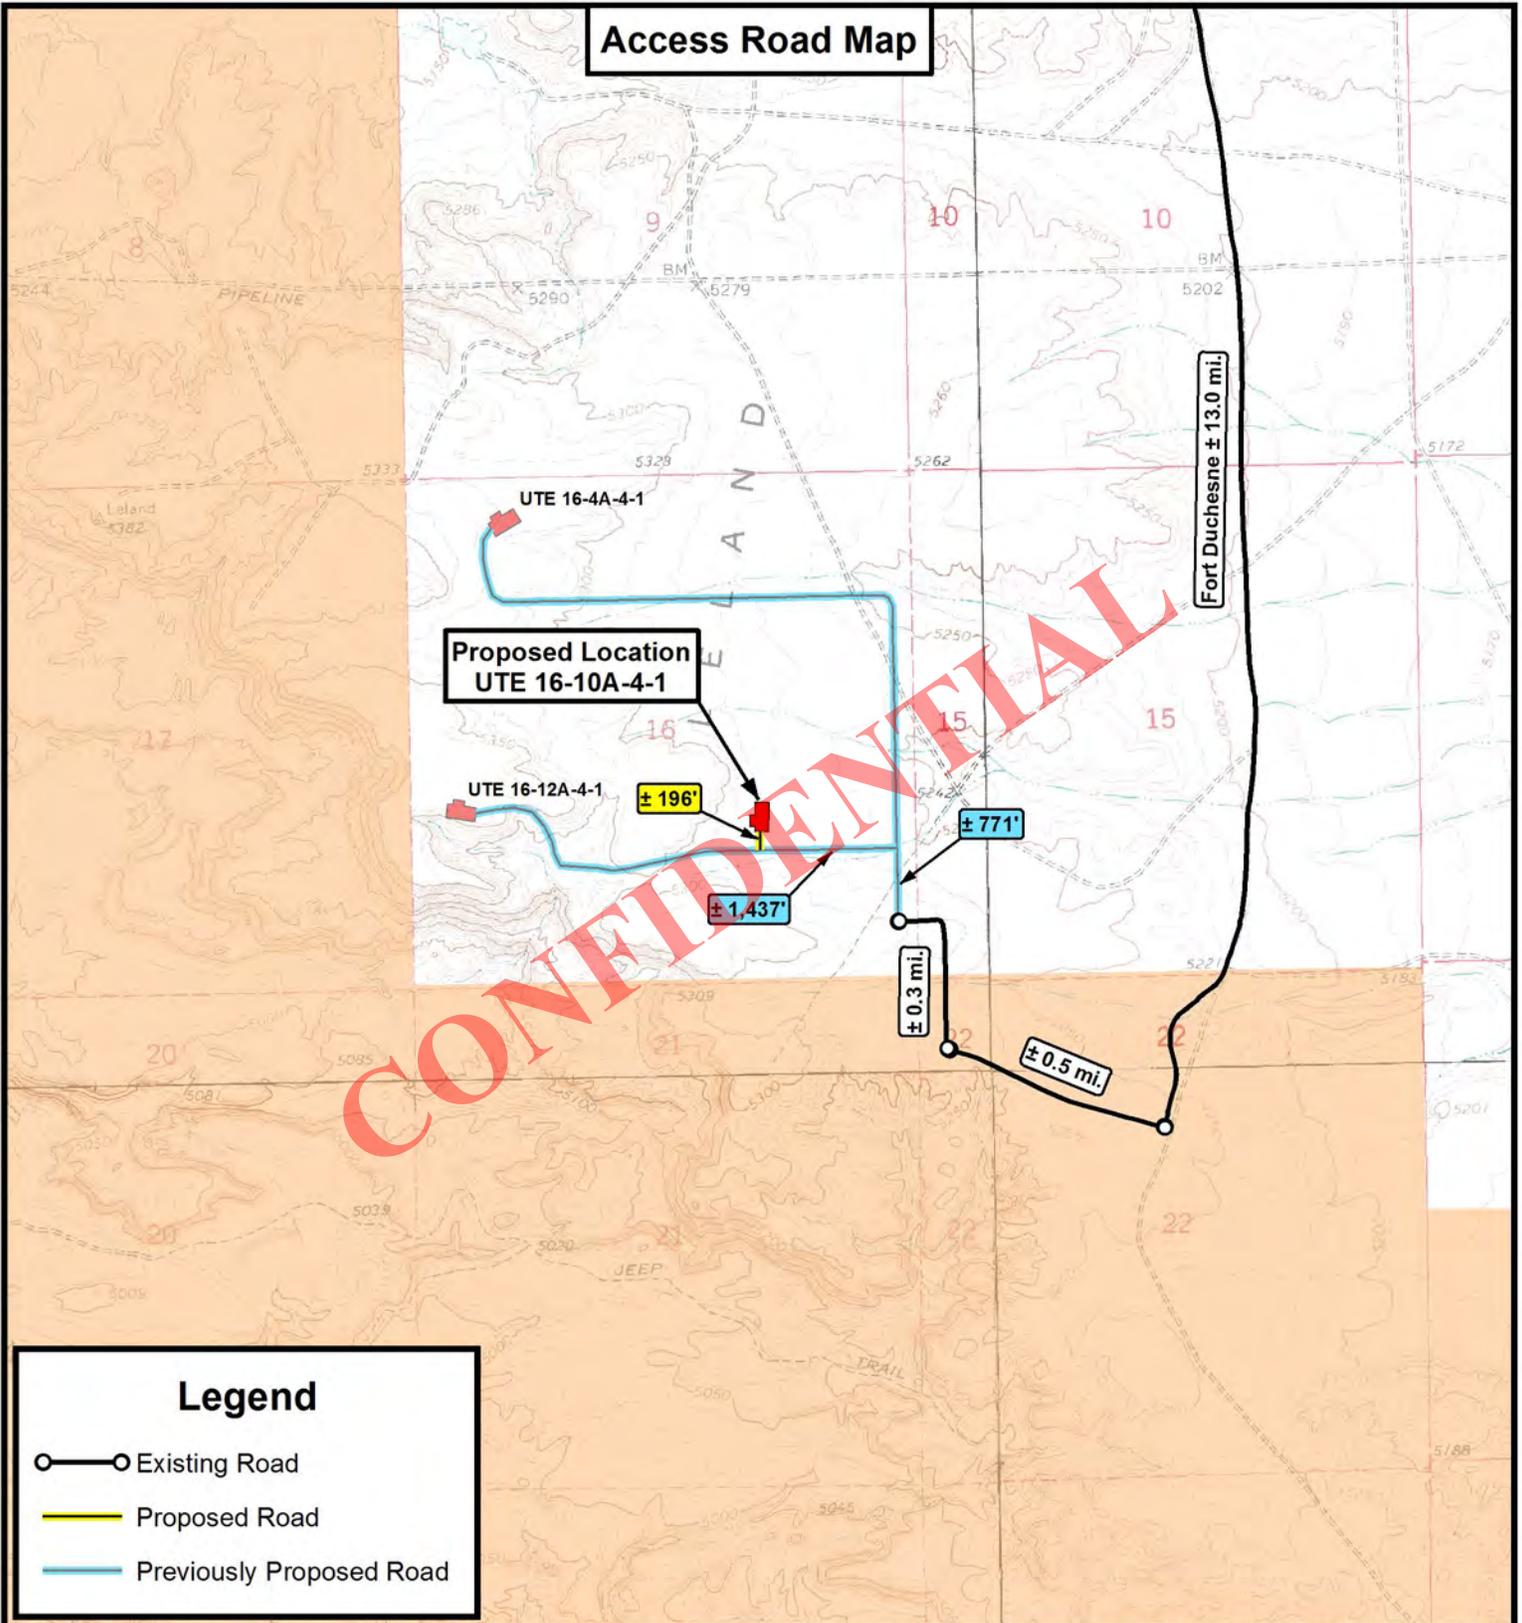

**Legend**

- Existing Road
- Proposed Road
- Previously Proposed Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

**Tri State  
Land Surveying, Inc.**  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
F: (435) 781-2518



**FINLEY RESOURCES INC.**


UTE 16-10A-4-1  
SEC. 16, T4S, R1E, U.S.B.&M.  
Uintah County, UT.

DRAWN BY:	D.C.R.	REVISED:
DATE:	01-07-2012	
SCALE:	1" = 2,000'	

**TOPOGRAPHIC MAP**

SHEET  
**B**

**Proposed Pipeline Map**

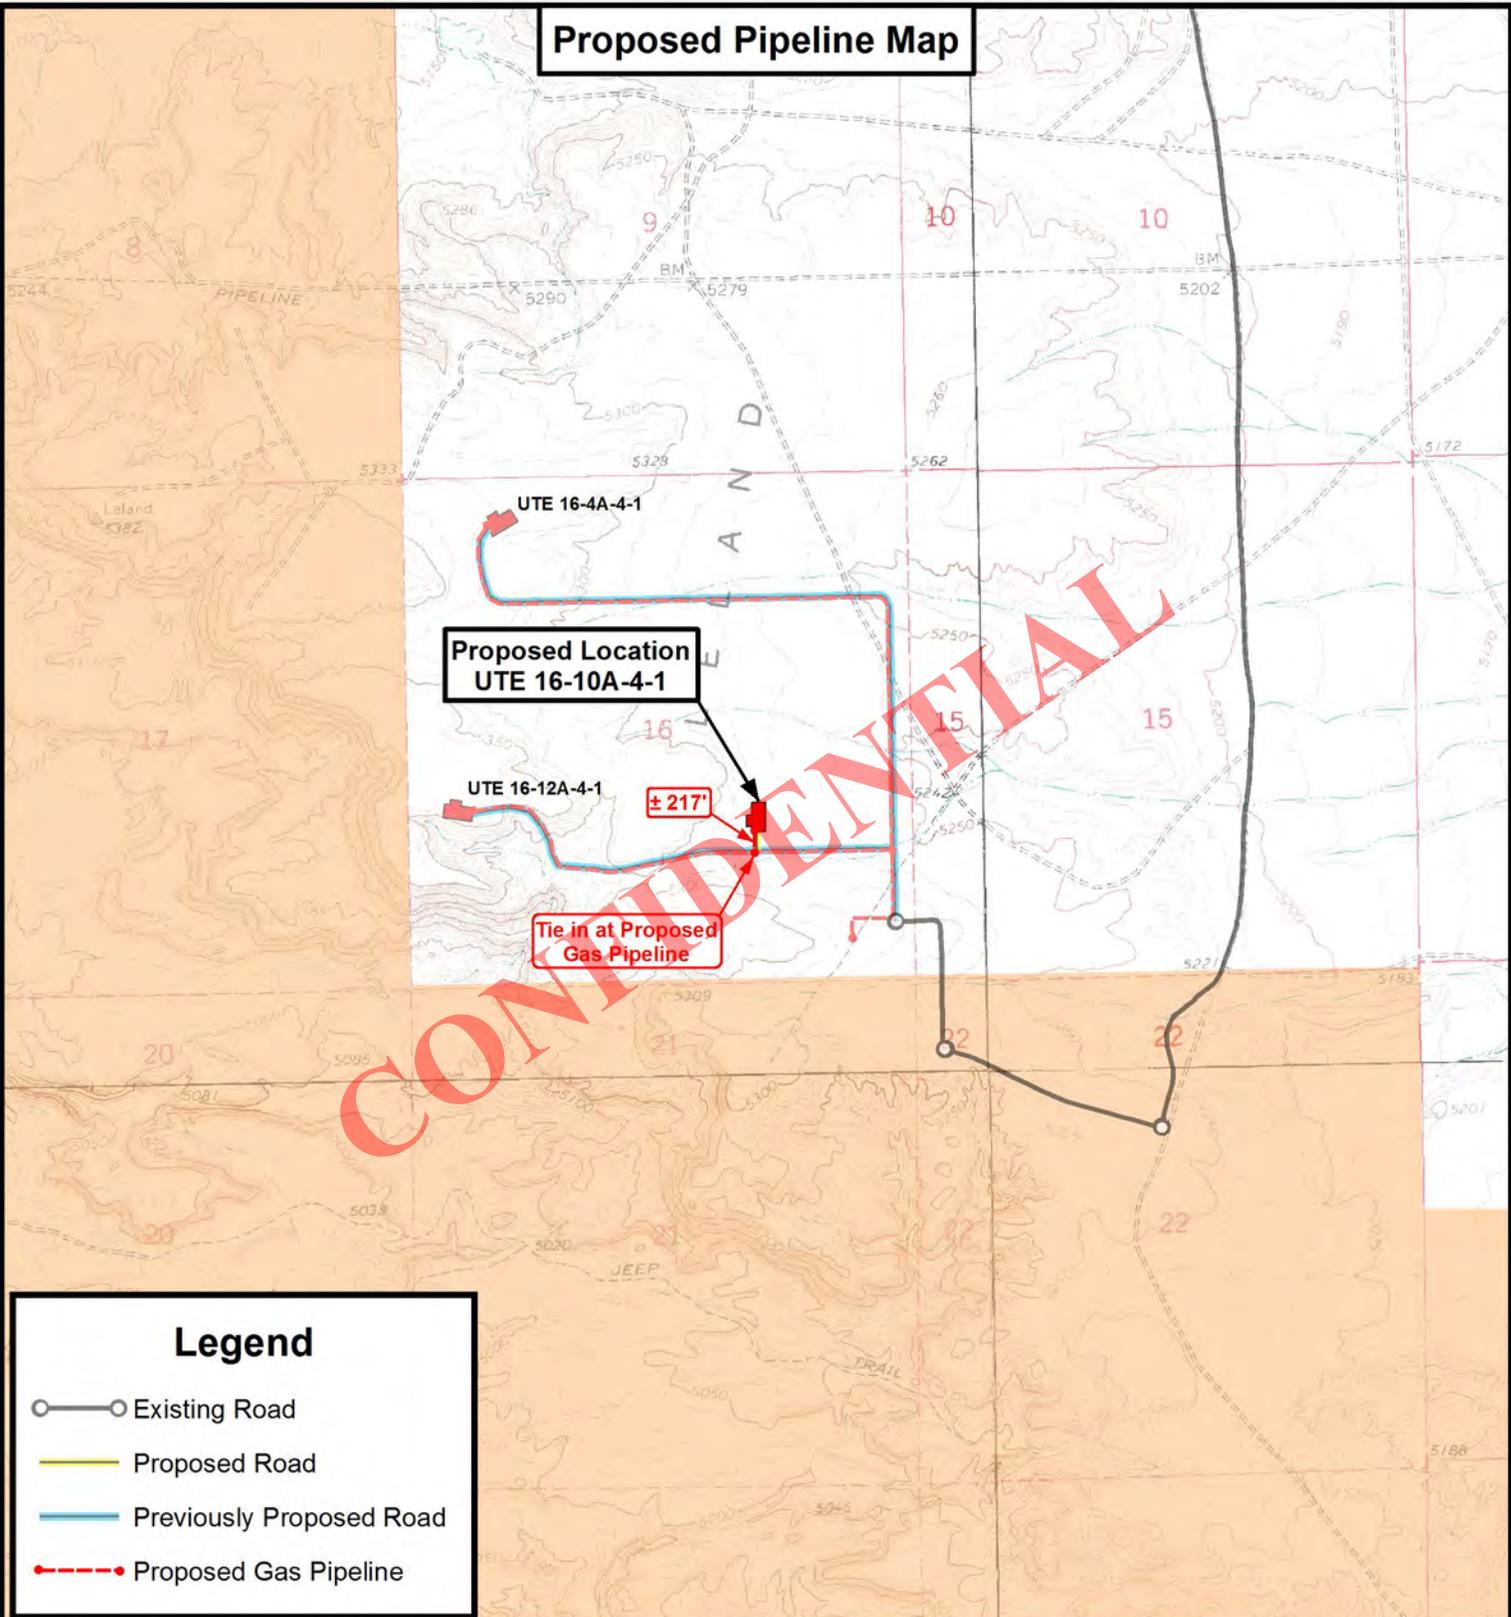

**Proposed Location  
UTE 16-10A-4-1**

UTE 16-4A-4-1  
UTE 16-12A-4-1  
**± 217'**  
**Tie in at Proposed  
Gas Pipeline**

**Legend**

- Existing Road
- Proposed Road
- Previously Proposed Road
- Proposed Gas Pipeline

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.



**Tri State  
Land Surveying, Inc.**  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
F: (435) 781-2518



**FINLEY RESOURCES INC.**

UTE 16-10A-4-1  
SEC. 16, T4S, R1E, U.S.B.&M.  
Uintah County, UT.

DRAWN BY:	D.C.R.	REVISED:
DATE:	01-07-2012	
SCALE:	1" = 2,000'	

**TOPOGRAPHIC MAP**

SHEET  
**C**

**Exhibit "B" Map**

**Proposed Location  
UTE 16-10A-4-1**

**CONFIDENTIAL**

**Legend**

-  1 Mile Radius
-  Proposed Location

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.



**Tri State  
Land Surveying, Inc.**  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501  
F: (435) 781-2518



**FINLEY RESOURCES INC.**

**UTE 16-10A-4-1  
SEC. 16, T4S, R1E, U.S.B.&M.  
Uintah County, UT.**

DRAWN BY:	D.C.R.	REVISED:
DATE:	01-07-2012	
SCALE:	1" = 2,000'	

**TOPOGRAPHIC MAP**

SHEET  
**D**

MEMORANDUM OF SURFACE USE AGREEMENT  
AND GRANT OF EASEMENTS

WHEREAS, Salradus, L.L.C., Bonnie Coleman managing member, whose address is 148 West Center Street, Heber City, UT 84032, Coleman Mountain Holdings, L.L.C., Mary Jo Coleman Adamson managing member, whose address is P.O. Box 610, Roosevelt, UT 84066, Joseph N. Coleman, Trustee of the Coleman Family Trust, dated June 7, 1991, whose address is 393 East Center, Heber City, UT 84032, and Leila Coleman, Trustee of the Coleman Family Trust dated June 28, 1991, whose address is 950 South 400 East #112, St. George, UT 84770 (hereinafter collectively referred to as "Coleman"), and Uintah Resources, Inc. whose address is 3165 E. Millrock Drive, Suite 550, Salt Lake City, UT 84121 ("Optionee") (Coleman and Optionee are hereinafter collectively referred to as "Owner") and Finley Resources, Inc., whose address is P.O. Box 2200, Fort Worth, Texas, 76113 ("Operator"), have entered into that certain Easement, Right-of-Way and Surface Use Agreement, hereinafter the "SUA", dated effective April 24<sup>th</sup>, 2012 covering the following lands owned by Owner in Uintah County, Utah, to wit:

Township 4 South, Range 1 East, U.S.M.  
Section 13: All  
Section 16: All  
Section 23: N/2

hereinafter the "Lands"

WHEREAS, in the SUA Owner grants and conveys unto Operator a non-exclusive right to enter upon and use the Lands and Owner's adjacent lands for certain oil and gas related purposes, together with a right-of-way across the Lands to maintain and construct access roads, well sites, holding tanks and other such related facilities necessary for Operator's oil and gas operations.

This Memorandum of Surface and Damage Agreement shall serve as notice of the agreement covering the Lands and that the SUA is binding upon Owner and Operator's respective successors and/or assigns.


The terms and provisions of the unrecorded SUA are referred to and incorporated herein, and made a part hereof to the same extent as though set out verbatim. Should any conflict arise between the terms of this Memorandum of Surface Use Agreement and Grant of Easements and the SUA, the terms of the SUA shall control.

Executed this 24<sup>th</sup> day of April, 2012.

**OWNER:**

  
Salradus, L.L.C.  
Bonnie S. Coleman, managing member  
148 West Center Street  
Heber City, UT 84032

Coleman Mountain Holdings, L.L.C.  
Mary Jo Coleman Adamson, Managing Member  
P.O. Box 610  
Roosevelt, UT 84066

  
Coleman Family Trust  
Joseph N. Coleman, Trustee  
393 East Center  
Heber City, UT 84032


---

The Coleman Family Trust  
Leila Coleman, Trustee  
950 South 400 East #112  
St. George, UT 84770

---

Uintah Resources, Inc.  
By: Todd Dana  
Its: President

**OPERATOR:**


  
Finley Resources Inc.  
By: Clinton Koerth  
Its: Vice President

**CONFIDENTIAL**

  
Coleman Mountain Holdings, L.L.C.  
Mary So Coleman, managing member.  
610 N. Mesa Circle, PO Box 610  
Roosevelt, UT 84066

---

Coleman Family Trust  
Joseph N. Coleman, Trustee  
393 East Center  
Heber City, UT 84032

  
The Coleman Family Trust  
Leila Coleman, Trustee  
950 South 400 East #112  
St. George, UT 84770

  
Uintah Resources, Inc.  
By: ~~Todd Dana~~ Vincent J Memmott  
Its: President

**OPERATOR:**

---

Finley Resources Inc.  
By: Clinton Koerth  
Its: Vice President

**CONFIDENTIAL**



Coleman Mountain Holdings, L.L.C.  
Mary Jo Coleman Adamson, Managing Member  
P.O. Box 610  
Roosevelt, UT 84066

---

Coleman Family Trust  
Joseph N. Coleman, Trustee  
393 East Center  
Heber City, UT 84032



The Coleman Family Trust  
Leila Coleman, Trustee  
950 South 400 East #112  
St. George, UT 84770

---

Uintah Resources, Inc.  
By: Todd Dana  
Its: President

**OPERATOR:**

---

Finley Resources Inc.  
By: Clinton Koerth  
Its: Vice President


**CONFIDENTIAL**

API Well Completion by 2047526680000  
Weila Coleman, Trustee  
950 South 400 East #112  
St. George, UT 84770

---

Uintah Resources, Inc.  
By: Todd Dana  
Its: President

**OPERATOR:**




---

Finley Resources Inc.  
By: Clinton Koerth  
Its: Vice President

**CONFIDENTIAL**

Typical 5M BOP stack configuration

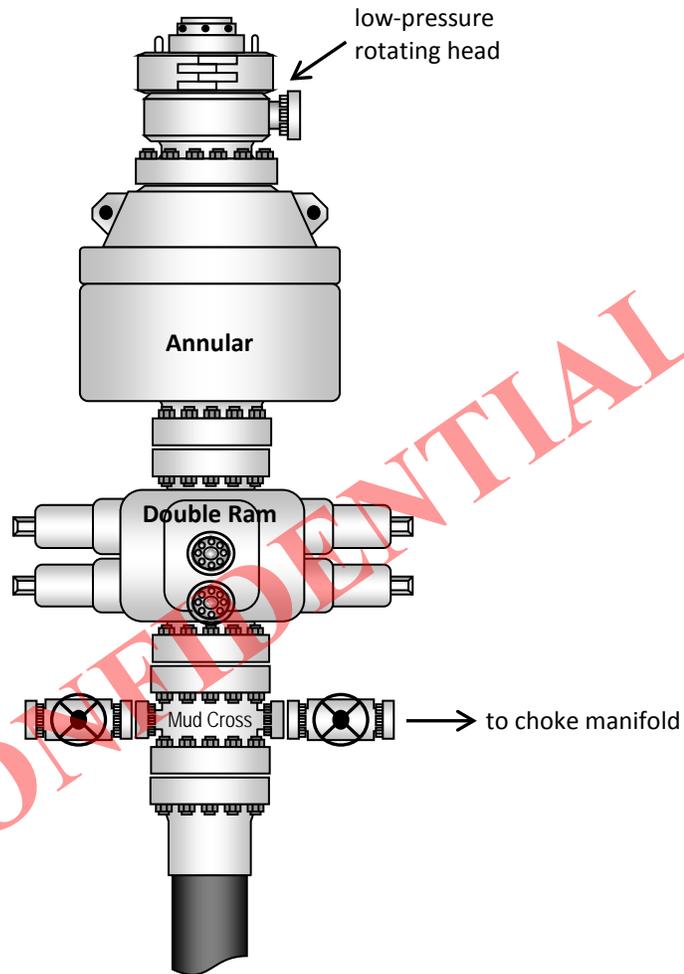



2580 Creekview Road  
Moab, Utah 84532  
435/719-2018

May 15, 2012

Mrs. Diana Mason  
State of Utah  
Division of Oil Gas and Mining  
P.O. Box 145801  
Salt Lake City, Utah 84114-5801

RE: Request for Exception to Spacing – Finley Resources, Inc. – **Ute 16-10A-4-1**  
1,650' FSL & 1,650' FEL, NW/4 SE/4, Section 16, T4S, R1E, USB&M  
Uintah County, Utah

Dear Diana:

Finley Resources, Inc. respectfully submits this request for exception to spacing (R649-3-2) based on topography since the well is located less than 460 feet to the drilling unit boundary. Finley Resources, Inc. is the only owner and operator within 460 feet of the surface and target location as well as all points along the intended well bore path and are not within 460 feet of any uncommitted tracts or a unit boundary.

Thank you very much for your timely consideration of this application. Please feel free to contact Matthew Cooper of Finley Resources, Inc. at 817-231-8738 or myself should you have any questions or need additional information.

Sincerely,

A handwritten signature in blue ink that reads "Don Hamilton".

Don Hamilton  
Agent for Finley Resources, Inc.

cc: Matthew Cooper, Finley Resources, Inc.



RECEIVED: May 14, 2012

# FINLEY RESOURCES INC.

## PROPOSED LOCATION LAYOUT

### UTE 16-10A-4-1

Pad Location: NWSE Section 16, T4S, R1E, U.S.B.&M.

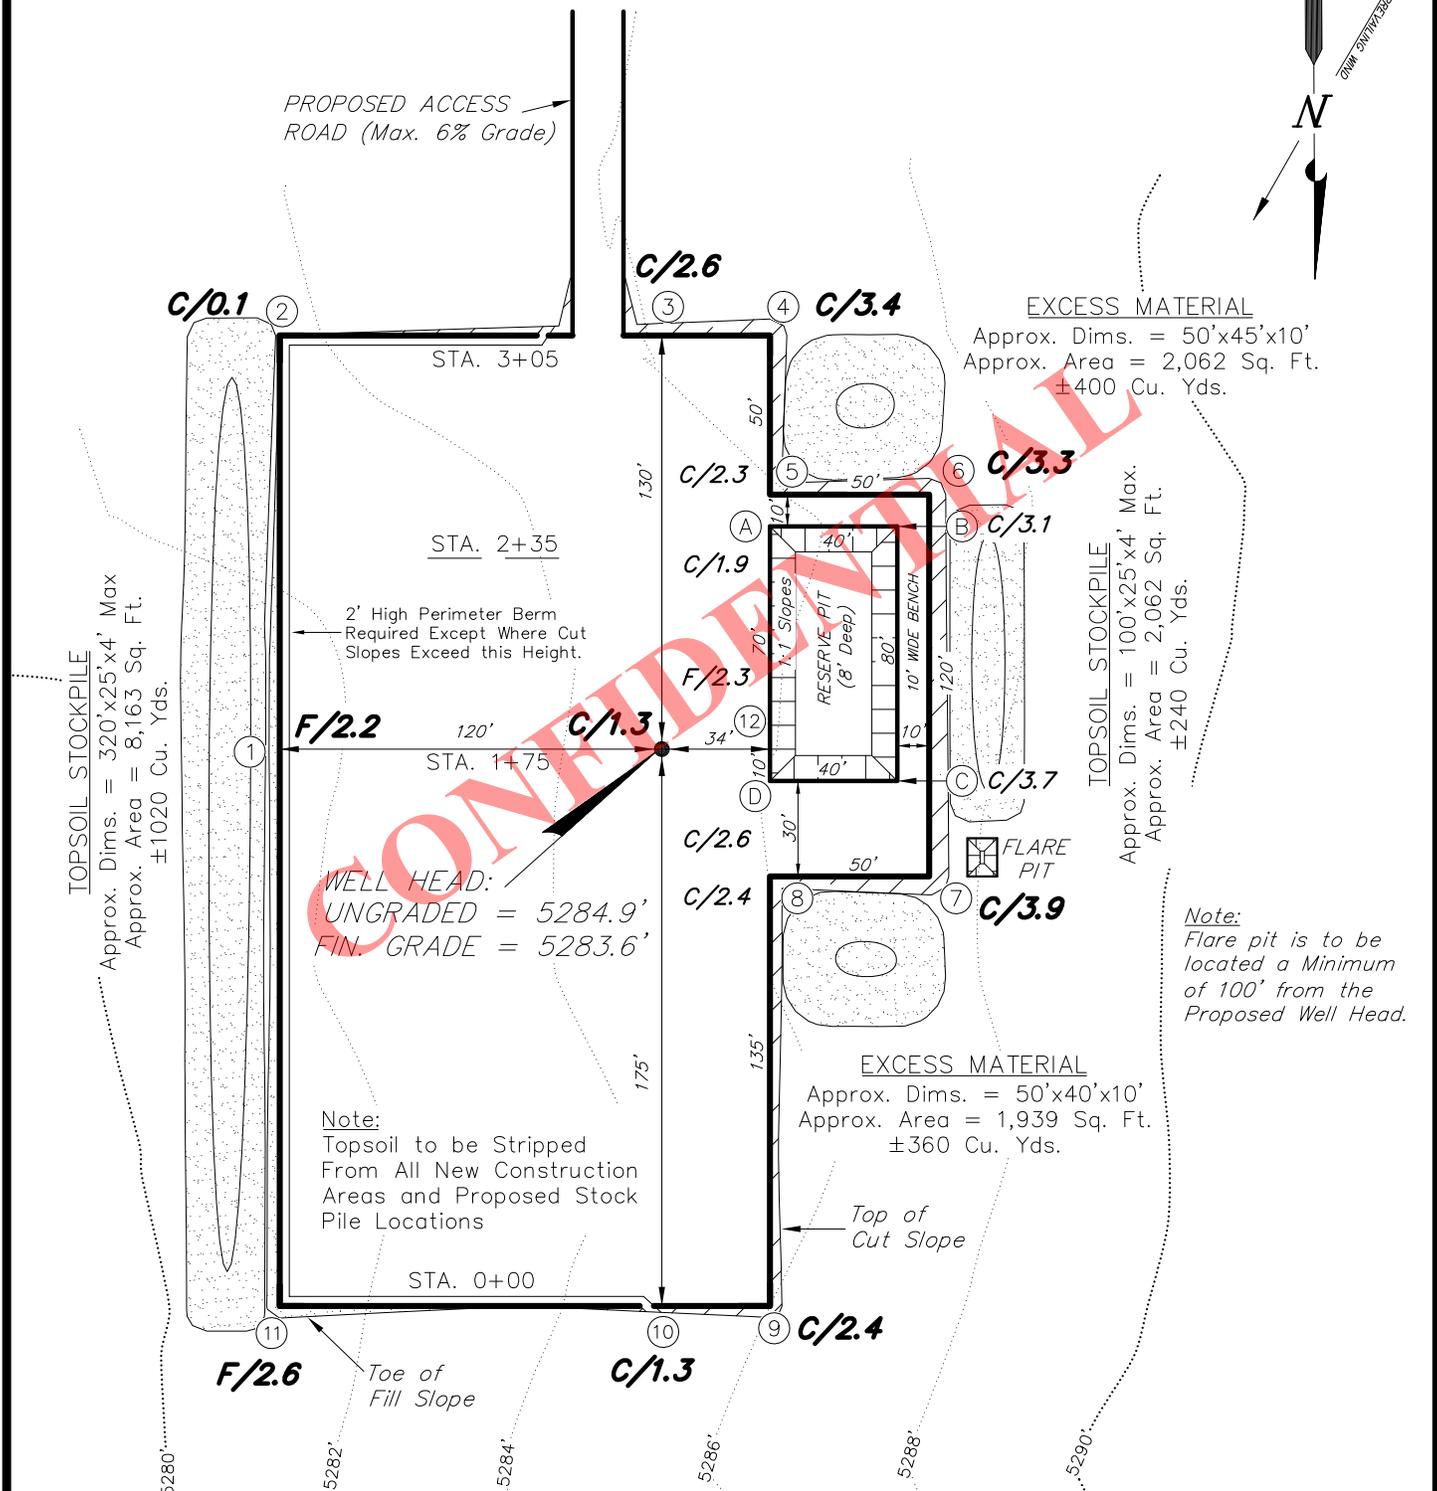

**NOTE:**  
The topsoil & excess material areas are calculated as being mounds containing 2,020 cubic yards of dirt (a 10% fluff factor is included). The mound areas are calculated with push slopes of 1.5:1 & fall slopes of 1.5:1.

**REFERENCE POINTS**

225' NORTHERLY	- 5285.7'
275' NORTHERLY	- 5284.8'
170' EASTERLY	- 5280.2'
220' EASTERLY	- 5279.1'

SURVEYED BY:	C.D.S.	DATE SURVEYED:	11-04-11
DRAWN BY:	R.B.T.	DATE DRAWN:	01-05-12
SCALE:	1" = 60'	REVISED:	

**Tri State Land Surveying, Inc.** (435) 781-2501  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078





**RECEIVED:** May 14, 2012

# FINLEY RESOURCES INC.

## CROSS SECTIONS

### UTE 16-10A-4-1

Pad Location: NWSE Section 16, T4S, R1E, U.S.B.&M.

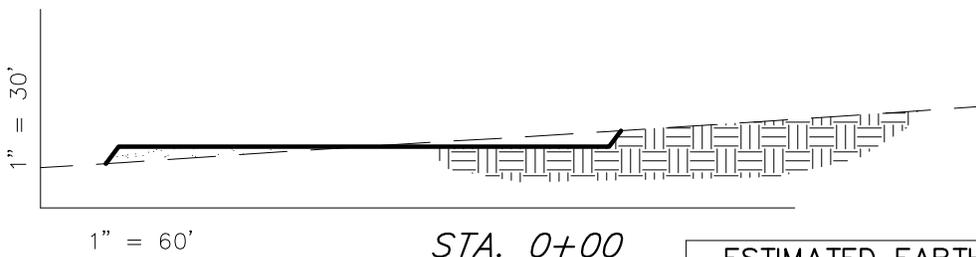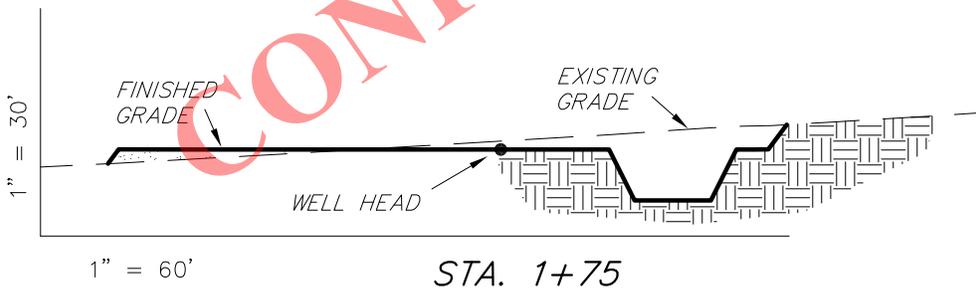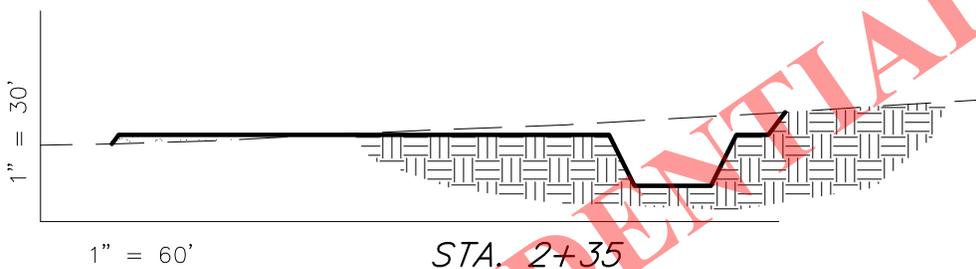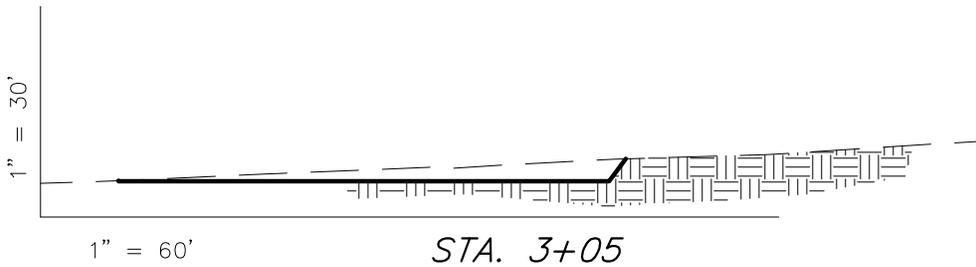

CONFIDENTIAL

NOTE:  
UNLESS OTHERWISE  
NOTED ALL CUT/FILL  
SLOPES ARE AT 1.5:1

ESTIMATED EARTHWORK QUANTITIES (No Shrink or swell adjustments have been used) (Expressed in Cubic Yards)				
ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	1,320	1,320	Topsoil is not included in Pad Cut Volume	0
PIT	690	0		690
TOTALS	2,010	1,320	1,140	690

SURVEYED BY:	C.D.S.	DATE SURVEYED:	11-04-11
DRAWN BY:	R.B.T.	DATE DRAWN:	01-05-12
SCALE:	1" = 60'	REVISED:	


**Tri State** (435) 781-2501  
Land Surveying, Inc.  
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

# FINLEY RESOURCES INC.

## TYPICAL RIG LAYOUT


### UTE 16-10A-4-1

Pad Location: NWSE Section 16, T4S, R1E, U.S.B.&M.

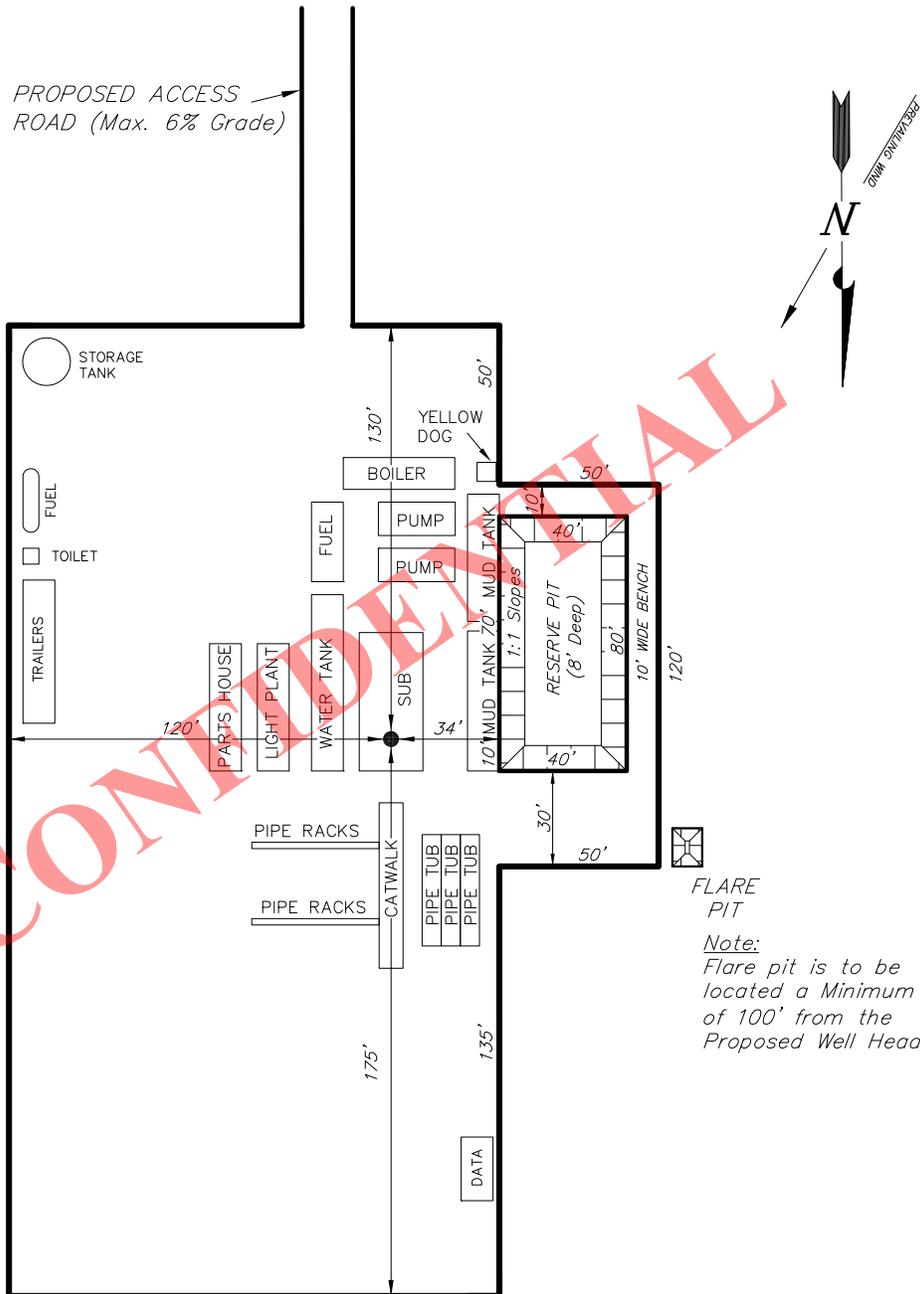

SURVEYED BY:	C.D.S.	DATE SURVEYED:	11-04-11
DRAWN BY:	R.B.T.	DATE DRAWN:	01-05-12
SCALE:	1" = 60'	REVISED:	


**Tri State** (435) 781-2501  
 Land Surveying, Inc.  
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

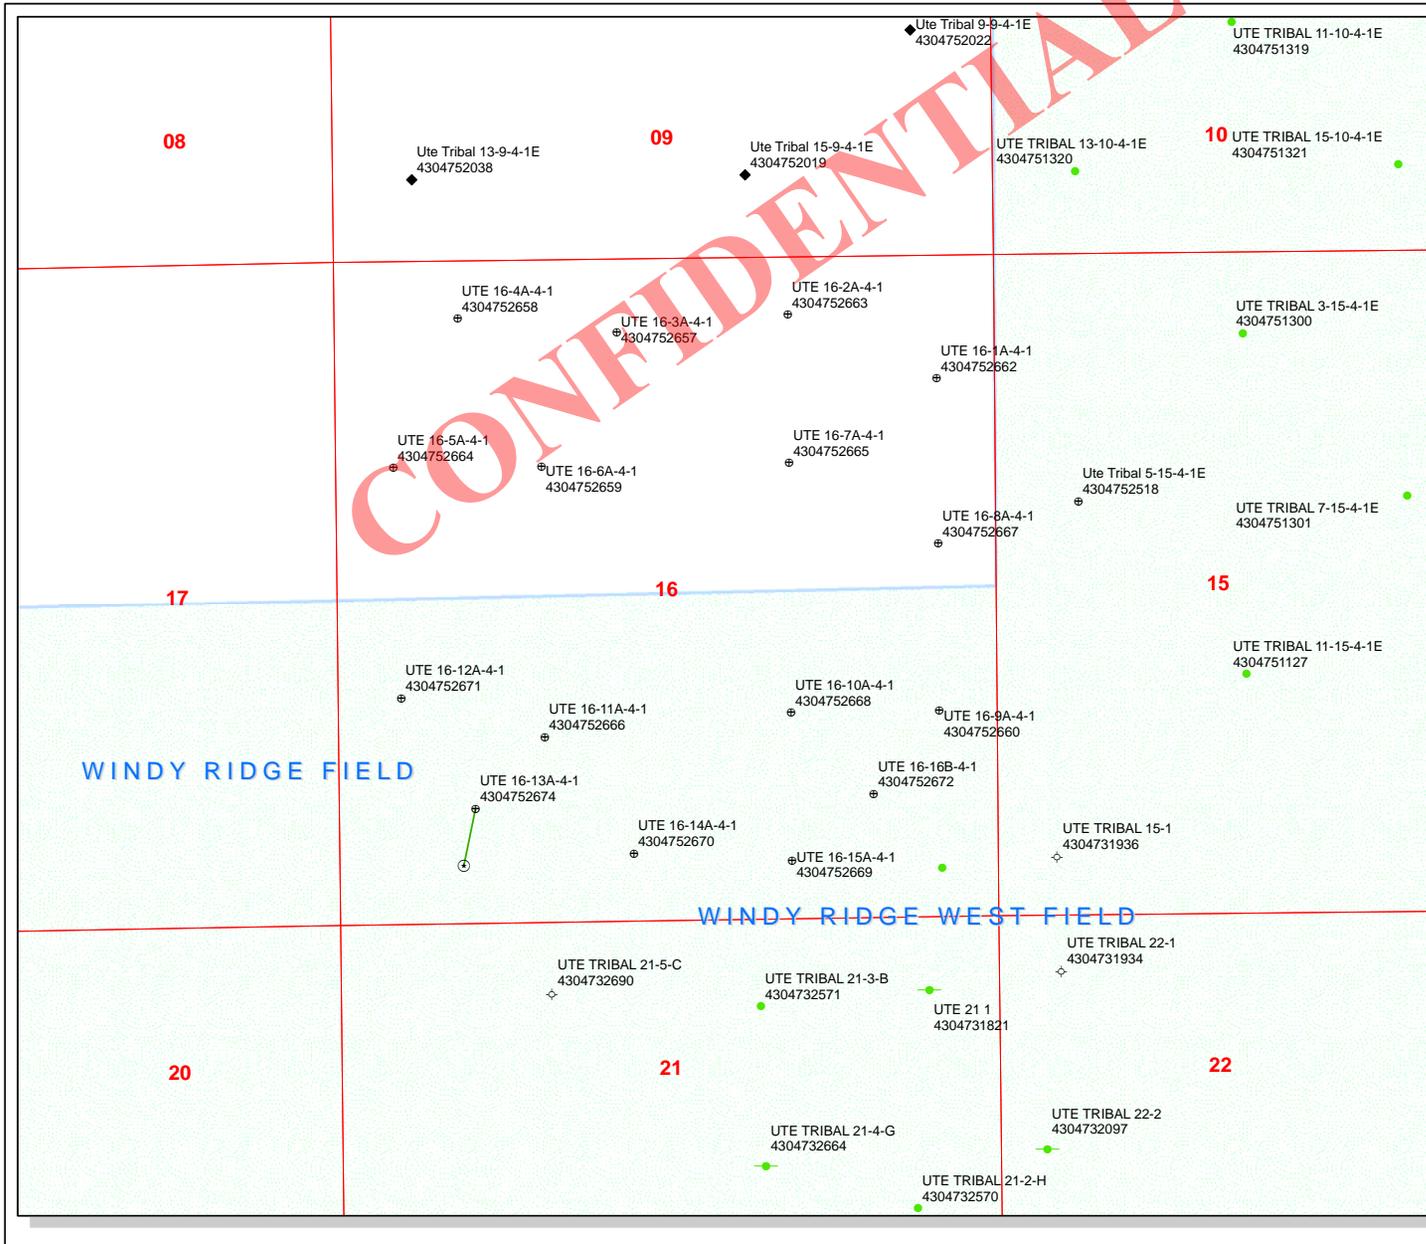

**API Number: 4304752668**  
**Well Name: UTE 16-10A-4-1**  
 Township T0.4 . Range R0.1 . Section 16  
 Meridian: UBM  
 Operator: FINLEY RESOURCES INC

Map Prepared:  
 Map Produced by Diana Mason

- |               |                                    |
|---------------|------------------------------------|
| <b>Units</b>  | <b>Wells Query</b>                 |
| <b>STATUS</b> | <b>Status</b>                      |
| ACTIVE        | APD - Approved Permit              |
| EXPLORATORY   | DRL - Spudded (Drilling Commenced) |
| GAS STORAGE   | GMW - Gas Injection                |
| NF PP OIL     | GS - Gas Storage                   |
| NF SECONDARY  | LA - Location Abandoned            |
| PI OIL        | LOC - New Location                 |
| PP GAS        | OPS - Operation Suspended          |
| PP GEOTHERMAL | PA - Plugged Abandoned             |
| PP OIL        | PGW - Producing Gas Well           |
| SECONDARY     | POW - Producing Oil Well           |
| TERMINATED    | RET - Returned APD                 |
| <b>Status</b> | SGW - Shut-in Gas Well             |
| Unknown       | SOW - Shut-in Oil Well             |
| ABANDONED     | TA - Temp. Abandoned               |
| ACTIVE        | TW - Test Well                     |
| COMBINED      | WDW - Water Disposal               |
| INACTIVE      | WWW - Water Injection Well         |
| STORAGE       | WSW - Water Supply Well            |
| TERMINATED    |                                    |



# ON-SITE PREDRILL EVALUATION

## Utah Division of Oil, Gas and Mining

**Operator** FINLEY RESOURCES INC  
**Well Name** UTE 16-10A-4-1  
**API Number** 43047526680000      **APD No** 5928    **Field/Unit** WINDY RIDGE  
**Location: 1/4,1/4 NWSE**    **Sec** 16    **Tw** 4.0S    **Rng** 1.0E    1650 FSL    1650 FEL  
**GPS Coord (UTM)** 595054 4443041      **Surface Owner** Coleman, et al.

### Participants

Ted Smith (DOGM), Clay O'Neil, Matthew Cooper(Finley), Bill Civish (BLM), Don Hamilton (Star Point Enterprises), Mary Jo, Scott.Cody, and Bert Coleman, (Coleman Brothers),Dayton Slaugh (Tri-State Survey)

### Regional/Local Setting & Topography

The general area is on Leland Bench, which is located about 14 miles south of Fort Duchesne, Uintah County, Utah. Broad flats with low growing desert shrub type vegetation characterize the area. A few rolling hills and slopes leading to higher flats occur. The Uinta formation dominates the surface. Soils are dominated by deep sandy clay loams with erosion pavement common on slopes. No springs, seeps or flowing streams are known to occur in the area. The Duchesne River is approximately 4 miles to the north and is the nearest source of flowing water. All lands in the immediate area are privately owned. Solid blocks or scattered Ute Tribal lands surround the area.

Access to the proposed well site is by State of Utah or Uintah County roads and existing or proposed oilfield development roads. Distance from Randlett, Utah is approximately 7 miles. Approximately 196 feet of new road will be constructed to reach the pad.

The proposed pad for the Ute 16-10A-4-1 oil well is laid out in a south to north direction. Maximum cut is 3.9 feet at Location Corner 7. The location is within the normal drilling window and appears to be a good site for constructing a pad, drilling and operating a well.

Coleman Brothers LLC. own the surface. Mary Jo, Scott, Cody, and Bert Coleman represented the Colman Brothers and had no problems with the site.

### Surface Use Plan

#### **Current Surface Use**

Grazing  
Wildlfe Habitat

#### **New Road Miles**

0.03

#### **Well Pad**

**Width** 150    **Length** 300

#### **Src Const Material**

Onsite

#### **Surface Formation**

ALLU

**Ancillary Facilities** N

### Waste Management Plan Adequate?

### Environmental Parameters

**Affected Floodplains and/or Wetlands** N

**Flora / Fauna**

Overall vegetation at this site is fair. The vegetation on Leland Bench is a desert shrub/forb type. Similar species are common throughout the area. Principal species are shadscale, bud sage, winter fat, horsebrush, broom snakeweed, Indian ricegrass, needle and thread grass, curly mesquite grass, scarlet globe mallow, matt and Gardiner saltbrush, hordeum jabutum and annual mustards. A few occurrences of cheat grass, rabbit brush, buckwheat, Mormon tea and other species occur but are not common. Impacts from past and current grazing do not exist.

Because of the lack of water and cover the area is not rich in fauna. Species include antelope, coyotes and small mammals and rodents. Some shrub dependent birds may occur but were not observed. Historically, but not currently, sheep and wild horses grazed the area. Light winter cattle grazing currently exist.

**Soil Type and Characteristics**

Soils are a moderately deep sandy loam

**Erosion Issues** N

**Sedimentation Issues** N

**Site Stability Issues** N

**Drainage Diversion Required?** N

**Berm Required?** N

**Erosion Sedimentation Control Required?** N

**Paleo Survey Run?** Y **Paleo Potential Observed?** N **Cultural Survey Run?** Y **Cultural Resources?** N

**Reserve Pit****Site-Specific Factors****Site Ranking**

<b>Distance to Groundwater (feet)</b>	100 to 200	5
<b>Distance to Surface Water (feet)</b>	>1000	0
<b>Dist. Nearest Municipal Well (ft)</b>	>5280	0
<b>Distance to Other Wells (feet)</b>	>1320	0
<b>Native Soil Type</b>	Mod permeability	10
<b>Fluid Type</b>	Fresh Water	5
<b>Drill Cuttings</b>	Normal Rock	0
<b>Annual Precipitation (inches)</b>		0
<b>Affected Populations</b>		
<b>Presence Nearby Utility Conduits</b>	Unknown	10
<b>Final Score</b>		30

3 Sensitivity Level

**Characteristics / Requirements**

Reserve pit 40' x 80' x 8' is planned in a cut on the northeast corner of the location. A liner with a minimum thickness of 16-mils is required. A sub-liner may not be needed because of the lack of rock in the area. Flare pit will be constructed 10' x 20' x 5'

**Closed Loop Mud Required? N Liner Required? Y Liner Thickness 16 Pit Underlayment Required? N**

**Other Observations / Comments**

Coleman Brothers LLC. own the surface. Mary Jo, Scott, Cody, Bert Coleman attended the presite. A signed surface use agreement has been completed. The Colman Brothers and had no problems with the site.

Ted Smith  
**Evaluator**

6/6/2012  
**Date / Time**

**CONFIDENTIAL**

# Application for Permit to Drill Statement of Basis

## Utah Division of Oil, Gas and Mining

APD No	API WellNo	Status	Well Type	Surf Owner	CBM
5928	43047526680000	LOCKED	OW	P	No
<b>Operator</b>	FINLEY RESOURCES INC		<b>Surface Owner-APD</b>	Coleman, et al.	
<b>Well Name</b>	UTE 16-10A-4-1		<b>Unit</b>		
<b>Field</b>	WINDY RIDGE		<b>Type of Work</b>	DRILL	
<b>Location</b>	NWSE 16 4S 1E U 1650 FSL 1650 FEL GPS Coord (UTM) 595053E 4443034N				

### Geologic Statement of Basis

The mineral rights for the proposed well are owned by the Ute Tribe. The BLM will be the agency responsible for evaluating and approving the drilling, casing and cement programs.

Brad Hill  
APD Evaluator

6/20/2012  
Date / Time

### Surface Statement of Basis

The general area is on Leland Bench, which is located about 14 miles south of Fort Duchesne, Uintah County, Utah. Broad flats with low growing desert shrub type vegetation characterize the area. A few rolling hills and slopes leading to higher flats occur. The Uinta formation dominates the surface. Soils are dominated by deep sandy clay loams with erosion pavement common on slopes. No springs, seeps or flowing streams are known to occur in the area. The Duchesne River is approximately 4 miles to the north and is the nearest source of flowing water. All lands in the immediate area are privately owned. Solid blocks or scattered Ute Tribal lands surround the area.

Access to the proposed well site is by State of Utah or Uintah County roads and existing or proposed oilfield development roads. Distance from Randlett, Utah is approximately 7 miles. Approximately 196 feet of new road will be constructed to reach the pad.

The proposed pad for the Ute 16-10A-4-1 oil well is laid out in a north to south direction across a flat with a slight slope to the west. Maximum cut is 3.9 feet at Location Corner 7. The location is within the normal drilling window and appears to be a good site for constructing a pad, drilling and operating a well.

Coleman Brothers LLC. own the surface. Mary Jo, Scott, Docy, Bert Coleman attended the presite. A signed surface use agreement has been completed. The Colman Brothers and had no problems with the site.

The minerals are owned by the United States Government and held in trust for the Ute Indian Tribe.

Uintah County has recently passed a new ordinance to regulate extraction industries. This ordinance requires a conditional use permit for all oil or gas wells in areas not zoned as industrial. Ute Energy is required to obtain a permit for this and other wells on Leland Bench.

Ted Smith  
Onsite Evaluator

6/6/2012  
Date / Time

**Conditions of Approval / Application for Permit to Drill**

<b>Category</b>	<b>Condition</b>
Pits	A synthetic liner with a minimum thickness of 16 mils shall be properly installed and maintained in the reserve pit.
Surface	The reserve pit shall be fenced upon completion of drilling operations.

**CONFIDENTIAL**

## WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 5/14/2012

API NO. ASSIGNED: 43047526680000

WELL NAME: UTE 16-10A-4-1

OPERATOR: FINLEY RESOURCES INC (N3460)

PHONE NUMBER: 435 719-2018

CONTACT: Don Hamilton

PROPOSED LOCATION: NWSE 16 040S 010E

Permit Tech Review: 

SURFACE: 1650 FSL 1650 FEL

Engineering Review: 

BOTTOM: 1650 FSL 1650 FEL

Geology Review: 

COUNTY: UINTAH

LATITUDE: 40.13226

LONGITUDE: -109.88430

UTM SURF EASTINGS: 595053.00

NORTHINGS: 4443034.00

FIELD NAME: WINDY RIDGE

LEASE TYPE: 2 - Indian

LEASE NUMBER: 14-20-H62-4896

PROPOSED PRODUCING FORMATION(S): WASATCH

SURFACE OWNER: 4 - Fee

COALBED METHANE: NO

## RECEIVED AND/OR REVIEWED:

- PLAT
- Bond: INDIAN - RLB 0011294
- Potash
- Oil Shale 190-5
- Oil Shale 190-3
- Oil Shale 190-13
- Water Permit: 43-8496
- RDCC Review:
- Fee Surface Agreement
- Intent to Commingle

Commingling Approved

## LOCATION AND SITING:

- R649-2-3.
- Unit:
- R649-3-2. General
- R649-3-3. Exception
- Drilling Unit
- Board Cause No: R649-3-3
- Effective Date:
- Siting:
- R649-3-11. Directional Drill

Comments: Presite Completed

Stipulations: 1 - Exception Location - dmason  
4 - Federal Approval - dmason  
5 - Statement of Basis - bhll  
23 - Spacing - dmason



GARY R. HERBERT  
*Governor*

GREGORY S. BELL  
*Lieutenant Governor*

# State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER  
*Executive Director*

Division of Oil, Gas and Mining

JOHN R. BAZA  
*Division Director*

## Permit To Drill

\*\*\*\*\*

**Well Name:** UTE 16-10A-4-1  
**API Well Number:** 43047526680000  
**Lease Number:** 14-20-H62-4896  
**Surface Owner:** FEE (PRIVATE)  
**Approval Date:** 7/2/2012

### Issued to:

FINLEY RESOURCES INC , PO Box 2200, Fort Worth, TX 76113

### Authority:

Pursuant to Utah Code Ann. 40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of R649-3-3. The expected producing formation or pool is the WASATCH Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

### Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

### Exception Location:

Appropriate information has been submitted to DOGM and administrative approval of the requested exception location is hereby granted.

### General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

### Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being

drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis (copy attached).

**Notification Requirements:**

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well - contact Carol Daniels at 801-538-5284

(please leave a voicemail message if not available)

OR

submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website

at <http://oilgas.ogm.utah.gov>

**Reporting Requirements:**

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) - due within 5 days of spudding the well
- Monthly Status Report (Form 9) - due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) - due prior to implementation
- Written Notice of Emergency Changes (Form 9) - due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) - due prior to implementation
- Report of Water Encountered (Form 7) - due within 30 days after completion
- Well Completion Report (Form 8) - due within 30 days after completion or plugging

**Approved By:**



For John Rogers  
Associate Director, Oil & Gas

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	<b>FORM 9</b>  <b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> 14-20-H62-4896
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7. UNIT or CA AGREEMENT NAME:</b>
<b>1. TYPE OF WELL</b> Oil Well	<b>8. WELL NAME and NUMBER:</b> UTE 16-10A-4-1
<b>2. NAME OF OPERATOR:</b> FINLEY RESOURCES INC	<b>9. API NUMBER:</b> 43047526680000
<b>3. ADDRESS OF OPERATOR:</b> PO Box 2200 , Fort Worth, TX, 76113	<b>PHONE NUMBER:</b> 817 231-8735 Ext
<b>9. FIELD and POOL or WILDCAT:</b> WINDY RIDGE	<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 1650 FSL 1650 FEL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: NWSE Section: 16 Township: 04.0S Range: 01.0E Meridian: U
<b>COUNTY:</b> UINTAH	<b>STATE:</b> UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> <b>NOTICE OF INTENT</b> Approximate date work will start: <b>11/15/2012</b>  <input type="checkbox"/> <b>SUBSEQUENT REPORT</b> Date of Work Completion:  <input type="checkbox"/> <b>SPUD REPORT</b> Date of Spud:  <input type="checkbox"/> <b>DRILLING REPORT</b> Report Date:	<input type="checkbox"/> ACIDIZE <input checked="" type="checkbox"/> <b>CHANGE TO PREVIOUS PLANS</b> <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Finley Resources Inc. respectfully submits this Sundry Notice requesting to change and extend the surface casing for this well. An updated Drilling Program reflecting these requested changes is attached.

**Accepted by the  
 Utah Division of  
 Oil, Gas and Mining**

**Date:** November 15, 2012

**By:** Don Hamilton

<b>NAME (PLEASE PRINT)</b> Don Hamilton	<b>PHONE NUMBER</b> 435 719-2018	<b>TITLE</b> Agent
<b>SIGNATURE</b> N/A	<b>DATE</b> 11/9/2012	

**Finley Resources, Inc.**  
**UTE 16-10A-4-1**  
**1650' FSL & 1650' FEL, NW/4 SE/4, Sec 16, T4S, R1E, U.S.B.&M.**  
**Uintah County, UT**

**Drilling Program**

**1. Formation Tops**

Surface	5,285'
Green River	2,455'
Black Shale	6,345'
Uteland Butte	6,875'
Wasatch	7,300'
TD	8,500'

**2. Depth to Oil, Gas, Water, or Minerals**

Black Shale	6,345' - 6,875'	(Oil)
Uteland Butte	6,875' - TD	(Oil)

Fresh water may be encountered in the Duchesne Formation, but is not expected below about 300'.

**3. Pressure Control**

Section                      BOP Description

Surface                      12-1/4" diverter

Interm/Prod                The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc for a 5M system.

A 5M BOP system will consist of 2 ram preventers (double or two singles) and an annular preventer (see attached diagram). A choke manifold rated to at least 5,000 psi will be used.

**4. Casing**

Description	Interval		Weight (ppf)	Grade	Coup	Pore Press @ Shoe	MW @ Shoe	Frac Grad @ Shoe	Safety Factors		
	Top	Bottom							Burst	Collapse	Tension
Conductor 13 3/8	0'	60'	48	H-40	STC	--	--	--	1,730	770	322,000
Surface 8 5/8	0'	500'	24	J-55	STC	8.33	8.6	11	2,950	1,370	244,000
Production 5 1/2	0'	8,500'	15.5	J-55	LTC	9	9.5	11	4,810	4,040	217,000
									1.54	1.21	1.65

**Assumptions:**

Surface casing MASP = (frac gradient + 1.0 ppg) - (gas gradient)

Intermediate casing MASP = (reservoir pressure) - (gas gradient)

Production casing MASP = (reservoir pressure) - (gas gradient)

All collapse calculations assume fully evacuated casing with a gas gradient

All tension calculations assume air weight of casing

Gas gradient = 0.1 psi/ft

All casing shall be new. Top Joint of surface casing will be J-55 STC 32 ppf casing.

All casing strings shall have a minimum of 1 centralizer on each of the bottom 3 joints.

**5. Cement**

Job	Hole Size	Fill	Slurry Description	ft <sup>3</sup>	OH excess	Weight (ppg)	Yield (ft <sup>3</sup> /sk)
				sacks			
Conductor	17 1/2	60'	Class G w/ 2% KCl + 0.25 lbs/sk Cello Flake	48	15%	15.8	1.17
				41			
Surface Lead	12 1/4	500'	Class G w/ 2% KCl + 0.25 lbs/sk Flocele	413	100%	15.8	1.15
				359			
Production Tail	7 7/8	5,500'	50/50 Poz/Class G w/ 3% KCl + 2% bentonite	1191	25%	13.2	1.24
				961			

The surface casing will be cemented to surface. In the event that cement does not reach surface during the primary cement job, a remedial job will be performed.

Actual cement volumes for the production casing string will be calculated from an open hole caliper log, plus 25% excess.

**6. Type and Characteristics of Proposed Circulating Medium****Interval****Description**

Surface - 500'

An air and/or fresh water system will be utilized.

500' - TD

A water based mud system will be utilized. Hole stability may be improved with additions of KCl or a similar inhibitive substance. In order to control formation pressure the system will be weighted with additions of bentonite, and if conditions warrant, with barite.

Anticipated maximum mud weight is 9.5 ppg.

**7. Logging, Coring, and Testing**

**Logging:** A dual induction, gamma ray, and caliper log will be run from TD to the base of the surface casing. A compensated neutron/formation density log will be run from TD to the top of the Garden Gulch formation. A cement bond log will be run from PBTB to the cement top behind the production casing.

**Cores:** As deemed necessary.

**DST:** There are no DST's planned for this well.

## 8. Anticipated Abnormal Pressure or Temperature

Maximum anticipated bottomhole pressure will be approximately equal to total depth (feet) multiplied by a 0.47 psi/ft gradient.

$$8,500' \times 0.47 \text{ psi/ft} = 3978 \text{ psi}$$

No abnormal temperature is expected. No H<sub>2</sub>S is expected.

## 9. Other Aspects

This is planned as a vertical well.

Variance Request for FIT Requirements:

Finley Resources, Inc. respectfully requests a variance to Onshore Order 2, Section III, Part Bi, for the Pressure integrity test (PIT, also known as a formation integrity test (FIT)). This well is not an exploratory well and is being drilled in an area where the formation integrity is well known. Additionally, when an FIT is run with the mud weight as required, the casing shoe frequently breaks down and causes subsequent lost circulation when drilling the entire depth of the well.

Variance Request for Air Drilling Requirements:

Finley Resources, Inc. respectfully requests a variance to Onshore Order #2, III.E.1

- Dust suppression equipment. Variance granted for water mist system to substitute for the dust suppression equipment.
- Blooie line discharge 100' from the well bore. Variance granted for blooie line discharge to be 75' from the well bore.
- Compressors located in the opposite direction from the blooie line a minimum of 100' from the wellbore. Variance granted for truck/trailer mounted air compressors.
- Straight run blooie line. Variance granted for targeted "T's" at bends.
- Automatic igniter. Variance granted for igniter due to water mist.
- Air drilling operations will be conducted only during drilling of the surface casing hole, there is no history of hydrocarbons being encountered in this hole section in the area where these wells are to be drilled.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

RECEIVED

JUL 12 2012

FORM APPROVED  
OMB No. 1004-0136  
Expires July 31, 2010

APPLICATION FOR PERMIT TO DRILL OR REENTER

BLM

CONFIDENTIAL

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. 1420H624899
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator FINLEY RESOURCES, INC. Contact: DON S HAMILTON E-Mail: starpoint@etv.net		7. If Unit or CA Agreement, Name and No.
3a. Address P.O. BOX 2200 FT. WORTH, TX 76113	3b. Phone No. (include area code) Ph: 435-719-2018 Fx: 435-719-2019	8. Lease Name and Well No. UTE 16-10A-4-1
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface NWSE 1650FSL 1650FEL 40.132294 N Lat, 109.884264 W Lon At proposed prod. zone NWSE 1650FSL 1650FEL 40.132294 N Lat, 109.884264 W Lon		9. API Well No. 43-047-52608
14. Distance in miles and direction from nearest town or post office* 14.3 MILES SOUTH OF FT DUCHESNE, UTAH	12. County or Parish UINTAH	13. State UT
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1650	16. No. of Acres in Lease 640.00	17. Spacing Unit dedicated to this well 40.00
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 0	19. Proposed Depth 8500 MD 8500 TVD	20. BLM/BIA Bond No. on file RLB0011294
21. Elevations (Show whether DF, KB, RT, GL, etc.) 5285 GL	22. Approximate date work will start 08/15/2012	23. Estimated duration 60 DAYS

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- 1. Well plat certified by a registered surveyor.
- 2. A Drilling Plan.
- 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- 5. Operator certification
- 6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature (Electronic Submission)	Name (Printed/Typed) DON S HAMILTON Ph: 435-719-2018	Date 07/08/2012
Title PERMITTING AGENT		
Approved by (Signature)	Name (Printed/Typed) Jerry Kenczka	Date NOV 20 2012
Title Assistant Field Manager Lands & Mineral Resources	Office VERNAL FIELD OFFICE	

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

CONDITIONS OF APPROVAL ATTACHED

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

Additional Operator Remarks (see next page)

NOV 29 2012

Electronic Submission #142353 verified by the BLM Well Information System  
For FINLEY RESOURCES, INC., sent to the Vernal  
Committed to AFMSS for processing by LESLIE ROBINSON on 07/18/2012 ( )

DIV. OF OIL, GAS & MINING

NOTICE OF APPROVAL

UDOGM

\*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED

12UBR0480AE

NO NOS-



**UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
VERNAL FIELD OFFICE**

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



**CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL**

**Company:** Finley Resources, INC  
**Well No:** Ute 16-10A-4-1  
**API No:** 43-047-52668

**Location:** NWSE, Sec. 16, T4S, R1E  
**Lease No:** 14-20-H62-4899  
**Agreement:** N/A

**OFFICE NUMBER: (435) 781-4400**

**OFFICE FAX NUMBER: (435) 781-3420**

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR  
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

**NOTIFICATION REQUIREMENTS**

Construction Activity (Notify Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist)	- The Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist shall be notified at least 48 hours in advance of any construction activity. The Ute Tribal office is open Monday through Thursday.
Construction Completion (Notify Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist)	- Upon completion of the pertinent APD/ROW construction, notify the Ute Tribe Energy & Minerals Dept. for a Tribal Technician to verify the Affidavit of Completion. Notify the BLM Environmental Scientist prior to moving on the drilling rig.
Spud Notice (Notify BLM Petroleum Engineer)	- Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify BLM Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to running casing and cementing all casing strings to: <a href="mailto:blm_ut_vn_opreport@blm.gov">blm_ut_vn_opreport@blm.gov</a> .
BOP & Related Equipment Tests (Notify BLM Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify BLM Petroleum Engineer)	- Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

**SURFACE USE PROGRAM  
CONDITIONS OF APPROVAL (COAs)**

- Any deviation of submitted APD's, which includes BBCs surface use plan, and ROW applications the operator will notify the BLM in writing and will receive written authorization of any such change with appropriate authorization.
- The operator will implement "Safety and Emergency Plan." The operator's safety director will ensure its compliance.
- All operator employees and/or authorized personnel (sub-contractors) in the field will have approved applicable APD's, COAs, and ROW permits/authorizations on their person(s) during all phases of construction.
- All vehicular traffic, personnel movement, construction/restoration operations should be confined to the area examined and approved, and to the existing roadways and/or evaluated access routes.
- All personnel should refrain from collecting artifacts, any paleontological fossils, and from disturbing any significant cultural resources in the area.
- The personnel from the BLM should be notified should cultural remains from subsurface deposits be exposed or identified during construction. All construction will cease until resources can be identified and protected properly.
- Production facilities would be painted Juniper Green to blend in with the surrounding habitat, unless otherwise stated from the private land owner agreement.
- Site reclamation would be accomplished for portions of the well pad not needed for production, within 6 months of completion, weather permitting. This also includes any roads, and pipeline areas that have been disturbed as well. Roads and pipeline disturbances can undergo reclamation immediately after the pipeline is installed and after the roads are built. Please contact surface owner or the BLM AO for possible seed mixes to use in the project area. Non-natives can be used; however lbs/ac must be kept low to minimize the chance of a monoculture.
- If the pump head is located in the river channel where larval fish are known to occur, the following measures apply:
  - a. do not situate the pump in a low-flow or no-flow area as these habitats tend to concentrate larval fishes;
  - b. limit the amount of pumping, to the greatest extent possible, during that period of the year when larval fish may be present (April 1 to August 31); and
  - c. limit the amount of pumping, to the greatest extent possible, during the pre-dawn hours as larval drift studies indicate that this is a period of greatest daily activity.
- Screen all pump intakes with 3/32 inch mesh material.
- Approach velocities for intake structures will follow the National Marine Fisheries Service's document "Fish Screening Criteria for Anadromous Salmonids". For projects with an in-stream intake that operate in stream reaches where larval fish may be present, the approach velocity will not exceed 0.33 feet per second (ft/s).
- Report any fish impinged on the intake screen to the Service (801.975.3330) and the Utah Division of Wildlife Resources:

Northeastern Region  
318 North Vernal Ave, Vernal, UT 84078  
Phone: (435) 781-9453

Finley can only use one of the following water sources listed in Finley's APD.

**DOWNHOLE PROGRAM  
CONDITIONS OF APPROVAL (COAs)**

**SITE SPECIFIC DOWNHOLE COAs:**

- Surface casing setting depth shall be 500 ft. Surface casing cementing volumes pumped shall be increased and cement shall continue to be brought to surface.
- Additional cement required, for Cementing Program covering Production Casing string. Production casing cement shall be brought up and into the surface.
- Surface casing cement shall be brought to surface.
- A variance is granted for Onshore Order #2 Drilling Operations III. B. I. pressure integrity test (PIT) or formation integrity test (FIT) of surface casing shoe.
- A variance is granted for Onshore Order #2 Drilling Operations III. E. "Blooie line discharge 100 feet from well bore and securely anchored" Blooie line can be 75 feet. All requirements will be adhered to covering air/gas drilling operations as described in Onshore Order #2 III. E. 1. Drilling Operations, Special Drilling Operations, air/gas drilling.

**All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to.** The following items are emphasized:

**DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS**

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.

- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to [BLM\\_UT\\_VN\\_Welllogs@BLM.gov](mailto:BLM_UT_VN_Welllogs@BLM.gov). This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

## OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- For information regarding production reporting, contact the Office of Natural Resources Revenue (ONRR) at [www.ONRR.gov](http://www.ONRR.gov).
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
  - Operator name, address, and telephone number.
  - Well name and number.
  - Well location ( $\frac{1}{4}$  $\frac{1}{4}$ , Sec., Twn, Rng, and P.M.).
  - Date well was placed in a producing status (date of first production for which royalty will be paid).
  - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
  - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
  - Unit agreement and/or participating area name and number, if applicable.
  - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if

performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

CONFIDENTIAL

**DIVISION OF OIL, GAS AND MINING**

**SPUDDING INFORMATION**

Name of Company; FINLEY RESOURCES INC

Well Name: UTE 16-10A-4-1

Api No: 43-047-52668 Lease Type INDIAN-FEE SURF

Section 16 Township 04S Range 01E County UINTAH

Drilling Contractor PROPETRO DRLG RIG # AIR

**SPUDDED:**

Date 01/02/2012

Time 9:00 AM

How ROTARY

**Drilling will Commence:** \_\_\_\_\_

Reported by JIM SIMONTON

Telephone # (435) 630-1023

Date 01/02/2013 Signed CHD

CONFIDENTIAL

**DIVISION OF OIL, GAS AND MINING**

**SPUDDING INFORMATION**

Name of Company; FINLEY RESOURCES INC

Well Name: UTE 16-10A-4-1

Api No: 43-047-52668 Lease Type INDIAN-FEE SURF

Section 16 Township 04S Range 01E County UINTAH

Drilling Contractor PETE MARTIN DRLG RIG # BUCKET

**SPUDDED:**

Date 12/22/2012

Time 9:00 AM

How DRY

**Drilling will Commence:** \_\_\_\_\_

Reported by JIM SIMONTON

Telephone # (435) 630-1023

Date 01/02/2013 Signed CHD

BLM - Vernal Field Office - Notification Form

Operator Finley Resources Rig Name/# Capstar 321  
Submitted By Lynn Rich Phone Number 801-428-3542  
Well Name/Number UTE 16-10A-4-1  
Qtr/Qtr NW SE Section 16 Township 4S Range 1E  
Lease Serial Number 14-20-H62-4896  
API Number 43-047-52668

Spud Notice – Spud is the initial spudding of the well, not drilling out below a casing string.

Date/Time \_\_\_\_\_ AM  PM

Casing – Please report time casing run starts, not cementing times.


- Surface Casing
- Intermediate Casing
- Production Casing
- Liner
- Other

Date/Time \_\_\_\_\_ AM  PM

BOPE

- Initial BOPE test at surface casing point
- BOPE test at intermediate casing point
- 30 day BOPE test
- Other

Date/Time 1/11/2013 01:00 AM  PM

Remarks 

RECEIVED

JAN 10 2013

DIV. OF OIL, GAS & MINING

Operator Finley Resources Rig Name/# Capstar 321  
 Submitted By Lynn Rich Phone Number 801-428-3542  
 Well Name/Number UTE 16-10A-4-1  
 Qtr/Qtr NW SE Section 16 Township 4S Range 1E  
 Lease Serial Number 14-20-H62-4896  
 API Number 43-047-52668

Spud Notice – Spud is the initial spudding of the well, not drilling out below a casing string.

Date/Time \_\_\_\_\_ AM  PM

Casing – Please report time casing run starts, not cementing times.

- Surface Casing
- Intermediate Casing
- Production Casing
- Liner
- Other

Date/Time 1/15/2013 6:00 AM  PM

BOPE

- Initial BOPE test at surface casing point
- BOPE test at intermediate casing point
- 30 day BOPE test
- Other

RECEIVED

JAN 15 2013

DIV. OF OIL, GAS & MINING

Date/Time \_\_\_\_\_ AM  PM

Remarks \_\_\_\_\_



STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>		<b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> 14-20-H62-4896
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>
		<b>7. UNIT or CA AGREEMENT NAME:</b>
<b>1. TYPE OF WELL</b> Oil Well		<b>8. WELL NAME and NUMBER:</b> UTE 16-10A-4-1
<b>2. NAME OF OPERATOR:</b> FINLEY RESOURCES INC		<b>9. API NUMBER:</b> 43047526680000
<b>3. ADDRESS OF OPERATOR:</b> PO Box 2200 , Fort Worth, TX, 76113	<b>PHONE NUMBER:</b> 817 231-8735 Ext	<b>9. FIELD and POOL or WILDCAT:</b> WINDY RIDGE
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 1650 FSL 1650 FEL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: NWSE Section: 16 Township: 04.0S Range: 01.0E Meridian: U		<b>COUNTY:</b> UINTAH
		<b>STATE:</b> UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
<b>TYPE OF SUBMISSION</b>	<b>TYPE OF ACTION</b>	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:  <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:  <input type="checkbox"/> SPUD REPORT Date of Spud:  <input checked="" type="checkbox"/> DRILLING REPORT Report Date: 2/28/2013	<input type="checkbox"/> ACIDIZE  <input type="checkbox"/> CHANGE TO PREVIOUS PLANS  <input type="checkbox"/> CHANGE WELL STATUS  <input type="checkbox"/> DEEPEN  <input type="checkbox"/> OPERATOR CHANGE  <input type="checkbox"/> PRODUCTION START OR RESUME  <input type="checkbox"/> REPERFORATE CURRENT FORMATION  <input type="checkbox"/> TUBING REPAIR  <input type="checkbox"/> WATER SHUTOFF  <input type="checkbox"/> WILDCAT WELL DETERMINATION	
	<input type="checkbox"/> ALTER CASING  <input type="checkbox"/> CHANGE TUBING  <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS  <input type="checkbox"/> FRACTURE TREAT  <input type="checkbox"/> PLUG AND ABANDON  <input type="checkbox"/> RECLAMATION OF WELL SITE  <input type="checkbox"/> SIDETRACK TO REPAIR WELL  <input type="checkbox"/> VENT OR FLARE  <input type="checkbox"/> SI TA STATUS EXTENSION  <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR  <input type="checkbox"/> CHANGE WELL NAME  <input type="checkbox"/> CONVERT WELL TYPE  <input type="checkbox"/> NEW CONSTRUCTION  <input type="checkbox"/> PLUG BACK  <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION  <input type="checkbox"/> TEMPORARY ABANDON  <input type="checkbox"/> WATER DISPOSAL  <input type="checkbox"/> APD EXTENSION  OTHER: <input style="width: 100px;" type="text"/>
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.		
Please see attached		
<b>Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY March 19, 2013</b>		
<b>NAME (PLEASE PRINT)</b> April Wilkerson	<b>PHONE NUMBER</b> 817 231-8735	<b>TITLE</b> Reg & Enviro Analyst
<b>SIGNATURE</b> N/A		<b>DATE</b> 3/19/2013

1/15/2013

Drill from 7414-7725' TD--88.8'/hr. Circ.and pump sweeps. Spot 150 bbl.brine and 60 bbl.high vis.mud. Lay down pipe and BHA. RU to run OH log. . Safety mtg..Ran OH logs with Weatherford. Hit bridge at 7539' and log out of hole OK. RD Weatherford. RU to run csg...

1/17/2013

Thaw out pump and lines on cement truck. Hold safety mtg..Pres.test lines. Cement prod.csg.as follows: Pump 10 bbl.water followed by 400 sxs.of 10.5 ppg lead cement (3.67 yield--22.9 gal./sx) followed by 700 sxs.of tail at 12 ppg (2.3 yield--13 gal/sx) and wash up and drop plug and displace plug with 183 bbl.of cla-web.water and had a final lift psi of 1806# and bump plug with 2556# at noon on 1/16/13. Float held. . ND and test hanger to 5000#. Clean pits and release rig at 5:00PM on 1/16/13. . Rigging down to move to 16-14A well. .

On 1/23/13 MIRU Cutters WL. Ran a gauge ring to tag at 7575'. Ran a CBL/VDL/GR log from tag at 7575' to surface. Top of tail cement est.at 3450'. Correlated the log to Weatherford Compact Triple Combo.dated 1/15/13. RDUFA

On 1/2/13 MIRU Pro-Petro air mist rig. Spud 12-1/4" hole at 10:10AM on 1/2/13. Air mist drill 12-1/4" hole to 510'. Ran survey at 505'--1\*. POOH and lay down drill pipe and air hammer. RIH with 12 jts.of 8-5/8" 24# ST&C J-55 csg.as follows: Guide shoe, 1 jt.,baffle plate and 11 jts.of csg.to surface. Used 5 centralizers. Land shoe at 504' GL and baffle at 462'. RU cementers. Cement surface csg.as follows: Pump 40 bbl.fresh water, 40 bbl.of gelled water followed by 360 sxs.of "G" 15.8 ppg cement drop plug and displace with 29 bbl.of water. Bump plug at 7:00PM on 1/2/13. Waiting on install of csg.head and drilling rig

On 2/20/13 MIRU Cutters WL. Well had previously had a frac head installed and tested csg.and frac tree to 4200#. Perforate the following Wastach intervals using a 3-3/8" csg.gun at 3 JPF and 120\* phasing per the CBL log dated 1/23/13: 7294-7301' & 7426-28' (27 holes). Correlated log to OH Density log dated 1/15/13. SIFN. On 2/21/13 will frac this interval and continue with additional zones.

On 2/21/13 MIRU Baker Hughes, Cutters WL and assoc.equipment. SICP=230#. Stage #1: Frac gross perforated Wastach interval 7426-7301' down 5-1/2" csg.as follows: Break down perfs.at 3490# and pump 1000 gal.of 15% HCL acid followed by a 131 bbl.pad and stage 2-6 ppg 20/40 mesh sand in 330 bbl.of Lightning 20# x-link gel water system with cla-control and displace with 500 gal.of 15% HCL and 162 bbl.of slick water. Lotal load of 772 bbl..Total of 45M# of 20/40 sand. Max.rate=46.8; Ave=43 BPM; Max.psi=3712#; Ave=3524#; ISIP=2595# (0.79); 5 min=2479#. Lubricate in a 5-1/2" comp.frac plug and set at 7270#. Stage #2: Perf.per the CBL log dated 1/23/13 and correlated to the OH log dated 1/15/13 the following Uteland Butte intervals at 3 JPF and 120\* phasing using a 3-3/8" csg.gun: 7122-24'; 7130-32'; 7138-40'; 7197-99' & 7210-12' (10'). Frac this interval with 7500 gal.of 15% HCL acid followed by 103 bbl.pad and stage 0.35 to 1/35 ppg 20/40 mesh sand in 1845 bbl.of slick water and flush with 500 gal.of 15% HCL acid and 160 bbl.slick water. total load of 2282 bbl..toal of 54M# of 20/40 sand. Cut sand 6M# early due to potential screen out. Flush successfully at a final rate of 35 BPM due to max.psi of 4000# on kickouts. Max.rate=54.8; Ave=49.9 BPM; Max.psi=4000#; Ave=3494#; ISIP=2454#(0.78); 5 min=2333#.

Lubricate in a comp.frac plug and set at 7080'. Stage #3: Perforate the following Castle Peak intervals as above per the CBL log and same guns: 6806-12'; 6828-32'; 6854-70' & 7014-20' (32'); Frac this interval using a Lightning 20# x-link gel water system as follows: Pump 500 gal.of 15% HCL acid followed by a 375 bbl.pad and stage 2-6 ppg sand in a total of 1124 bbl.of fluid and flush with 500 gal.of 15% HCL acid and 158 bbl.of slick water. Total of 128M# of 20/40 sand and a total load of 1717 bbl..Max.rate=60.1; Ave=59.6 BPM; ISIP=1692# (0.68); Lubricate in a frac plug and set at 6750'.Stage #3: Perforate the following Black Shale intervals as above: 6600-03'; 6610-12'; 6623-26'; 6630-33' & 6643-45'. SIFN. On 2/22/13 will continue to frac.

2/23/13

SICP=2203#. Break down Black Shale perms 6600-6645'(OA) w/ 500 gal.of 15% HCL. Frac with Lightning 20# x-link 2-6 ppg 20/40 sand, spot 500 gal 15% HCL acid w/flush. Total 52,000# of 20/40 sand 897 bbl fluid. Max IR 60.1 BPM Avg IR 59.5 Max IP 3703# avg IP 3436#; ISIP=2920# (0.88 FG); 5 min=2048#; Set frac plug at 6550'. Zone #5: Perf Douglas Creek w/ 3-3/8" csg.gun 3 SPF w/120\* phase-6339-43', 6482-87' (9'): breakdown w/500 gal 15% HCl, frac w/ 37,000# 20/40 ramped 2-6 ppg (20# x-link), spot 500 gal of 15% HCL with flush. Total 37,000# 20/40 sand 634 bbl fluid. Max IR 55.7 avg IR 47.3 BPM, Max IP 3580# avg IP 3418#, ISIP=1906# (.73 FG) 5 min 1734#. Set frac plug at 6300'. Zone #6: Perf Douglas Creek w/ 3 3/8" csg gun 3 SPF 120 deg 6005-15' & 6204-09' (15'); Breakdown w/ 500 gal 15% HCl, frac w/75,000# 20/40 (20# x-link) staged 2-6 ppg . Spot 500 gal 15% HCl w/flush. Total 75,000# sand 1047 bbl fluid. Max IR 60.6 avg IR 56.9; Max IP 2975# avg IP 2632# ISIP 1605# (0.70 FG) 5 min=1402#. Set frac plug at 5950'. Zone #7: Perf Garden Gulch intervals 5837-41' & 5851-67' (20') w/ 3 3/8" gun 3 SPF 120 deg. Breakdown w/500 gal 15% HCl, frac w/82,000# 20/40 (20# X-link) staged 2-6 ppg, spot 500 gal HCl w/flush. Total 82,000# sand 1056 bbl fluid. Max IR 59.9 avg IR 59.5 Max IP 2835# avg IP 2620# ISIP 1887# (0.76 FG) 5 min=1661#; Set frac plug at 5600'. Zone #8: Perf Garden Gulch interval 5137-47' & 5169-79' (20') w/ 3 3/8" gun 3 SPF 120 deg. Breakdown w/ 500 gal 15% HCl, frac w/61,500# 20/40 (20# X-link) staged 2-6 ppg, spot 500 gal HCl w/flush. Total of 61,500# sand and 783 bbl fluid. Max IR 35.7 avg IR 35.1 Max IP 2164# avg IP 1697# ISIP=1328# (0.70 FG); 5 min=1222#. Set frac plug at 5100'. Zone #9: Perf Green River intervals 4905-08'; 4928-32'; 4950-53' & 4955-57' (12')w/ 3 3/8" gun, 3 SPF 120 deg, breakdown with 500 gal 15% HCL, frac w/47,000# 20/40(20# X-link) stage 2-6 ppg, flush with 114 bbl.of slick water. Total 47,000# sand 653 bbl fluid. Max IR 59.6 avg IR 57.9 Max IP 2780# Ave IP 2701# ISIP=1530# (0.75 FG) 5 min=1371#. TLTR from all stages 9975 bbl.SI well RDMO frac equip. SI well 3 hrs, SICP 1050# open to flow back tank at 2000 hrs 2/22/13 on a 20/64" choke, flow well until 2000 hrs on 2/23//13 on various chokes with a cumulative recovery in the last 24 hours 2128 bbl water w/ no sand, started seeing slight trace of oil after 1538 bbl fluid with no gas and a final FCP=120# on a 32/64" choke at a rate of 54 bbl.per hour. SI at 2000 hrs 2/23/13 due to low flow rates. Open the csg.to flow back tank after a 12 hour SI period at 0800 hrs 2/24/13 with a SICP=370#. Flowed the well on various chokes for 4 hours and recovered an additional 200 bbl.of water with a final FCP=10# at a final rate of 25 bbl.per hour. SI the well at 1200 hrs on 2/24/13. LLR=7647 bbl

On 2/25/13 SICP=250#. NIRU Cutters WL and set a comp.BP at 4850#. RDMO Cutters. Bled off well. ND frac head. NU BOP's. Tally and rabbit in the hole with new 2-7/8" tbg.with 4-5/8" mill and pump off bit sub assembly and tag comp.BP at 4850'. Pull mill to 4840' and SIFN. On 2/26/13 will start to drill out plugs

On 2/26/13 SICP and SICP=0# with kill plug set at 4850'. RU swivel. Drill out comp.BP at 4850'. Had a 300# kick with no oil or gas. Continue in the hole and tag and drill out comp.frac plug at 5100'. Continue in the hole and tag frac plug at 5600' and drill out. Cont.in the hole and tag frac plug at 5950' and drill out. Cont.in the hole and tag frac plug at 6300' and drill out. Contin.in the hole and tag and drill out frac plug at 6550'. Cont.in the hole and tag and drill out frac plug at 6750'. Circ.hole clean. Had no oil or gas today and hole standing full with no gain or losses. Pull mill to 6480' and SIFN. On 2/27/13 will continue to clean out well. Two frac plugs to drill out.

On 2/27/13 SITP=0# with float in string and SICP=300#. Bled off. RIH with tbg.and tag and drill out frac plug at 7080'. Cont.in the hole and tag and drill out frac plug at 7270'. Trace of oil. Cont.in the hole and tag sand at 7415' and clean out well to PBSD of 7590'. Circ.hole clean. Spot biocide on bottom. LD power swivel. POOH and lay down mill and pump off bit sub assembly. RIH with prod.tubulars as follows: 2-7/8" bull plug; 2 jts.tbg.; 4' perf.sub; SN; 62 jts.of tbg.; TAC and 116 jts.of tbg..Well starting to flow. SIFN. On 2/28/13 will continue to RIH with production tubulars and rods and pump.

On 2/28/13 SITP and SICP=100#. Bled off. RIH with 36 jts.of tbg.and set TAC at 5027' with 12M# tension. Csg.started to flow. Pump 60 bbl.brine water down tbg..Well is dead. ND BOP's. Flush tbg.with 40 bbl.of hot 2% KCL water. Bucket test pump. RIH with 2-1/2"x1-1/2"x16' RHAC pump; 6-4'x1" stabalizers; 6-1-1/2" sinker bars; 10-3/4" guided rods; 150-3/4" slick rods; 11-7/8" slick rods; 1-2'; 6'; 8'x7/8" pony rods and polish rod. Seat pump and space out. Hung off. On 3/1/13 will RDMO and turn well over to production department. Tbg.Detail: 2-7/8" bull plug; 2 jts.tbg.; 4'perf.sub; SN; 62 jts.tbg.; 5-12" TAC; 152 jts.tbg.to surface. Tbg.tail at 7047'; SN at 6977' and TAC at 5027'.

RECEIVED

JUL 23 2013

CONFIDENTIAL

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS AND MINING

AMENDED REPORT FORM 8 (highlight changes)

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. TYPE OF WELL: OIL WELL [X] GAS WELL [ ] DRY [ ] OTHER [ ]
b. TYPE OF WORK: NEW WELL [ ] HORIZ. LATS. [ ] DEEP-EN [ ] RE-ENTRY [ ] DIFF. RESVR. [ ] OTHER [ ]

2. NAME OF OPERATOR: Finley Resources, Inc

3. ADDRESS OF OPERATOR: 1308 Lake Street CITY Fort Worth STATE TX ZIP 76102 PHONE NUMBER: (817) 231-8735

4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 1650 FSL, 1650 FEL AT TOP PRODUCING INTERVAL REPORTED BELOW: 1650 FSL, 1650 FEL AT TOTAL DEPTH: 1650 FSL, 1650 FEL

5. LEASE DESIGNATION AND SERIAL NUMBER: 14-20-H62-4896

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT or CA AGREEMENT NAME: Ute

8. WELL NAME and NUMBER: UTE 6-10A-4-1

9. API NUMBER: 4304752668

10. FIELD AND POOL, OR WILDCAT: Windy Ridge

11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NWSE 16 4S 1E

12. COUNTY: Uintah

13. STATE: UTAH

14. DATE SPURRED: 1/11/2013 15. DATE T.D. REACHED: 1/15/2013 16. DATE COMPLETED: 3/1/2013 ABANDONED [ ] READY TO PRODUCE [X]

17. ELEVATIONS (DF, RKB, RT, GL): 5285 GL

18. TOTAL DEPTH: MD 7,725 TVD 7,725

19. PLUG BACK T.D.: MD 7,590 TVD 7,590

20. IF MULTIPLE COMPLETIONS, HOW MANY? \*

21. DEPTH BRIDGE MD PLUG SET: TVD

22. TYPE ELECTRIC AND OTHER MECHANICAL LOGS RUN (Submit copy of each)

23. WAS WELL CORED? NO [X] YES [ ] (Submit analysis) WAS DST RUN? NO [X] YES [ ] (Submit report) DIRECTIONAL SURVEY? NO [X] YES [ ] (Submit copy)

24. CASING AND LINER RECORD (Report all strings set in well)

Table with columns: HOLE SIZE, SIZE/GRADE, WEIGHT (#/ft.), TOP (MD), BOTTOM (MD), STAGE CEMENTER DEPTH, CEMENT TYPE & NO. OF SACKS, SLURRY VOLUME (BBL), CEMENT TOP \*\*, AMOUNT PULLED

25. TUBING RECORD

Table with columns: SIZE, DEPTH SET (MD), PACKER SET (MD), SIZE, DEPTH SET (MD), PACKER SET (MD), SIZE, DEPTH SET (MD), PACKER SET (MD)

26. PRODUCING INTERVALS

Table with columns: FORMATION NAME, TOP (MD), BOTTOM (MD), TOP (TVD), BOTTOM (TVD)

27. PERFORATION RECORD

Table with columns: INTERVAL (Top/Bot - MD), SIZE, NO. HOLES, PERFORATION STATUS

28. ACID, FRACTURE, TREATMENT, CEMENT SQUEEZE, ETC.

Table with columns: DEPTH INTERVAL, AMOUNT AND TYPE OF MATERIAL

29. ENCLOSED ATTACHMENTS: [ ] ELECTRICAL/MECHANICAL LOGS [ ] GEOLOGIC REPORT [ ] DST REPORT [ ] DIRECTIONAL SURVEY [ ] SUNDRY NOTICE FOR PLUGGING AND CEMENT VERIFICATION [ ] CORE ANALYSIS [ ] OTHER:

30. WELL STATUS: P

**31. INITIAL PRODUCTION**

**INTERVAL A (As shown in item #26)**

DATE FIRST PRODUCED:		TEST DATE: 3/29/2013		HOURS TESTED: 24		TEST PRODUCTION RATES: →		OIL - BBL: 113	GAS - MCF: 0	WATER - BBL: 127	PROD. METHOD: Pump
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS. 50	API GRAVITY 38.60	BTU - GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL - BBL: 113	GAS - MCF: 0	WATER - BBL: 127	INTERVAL STATUS: Prod	

**INTERVAL B (As shown in item #26)**

DATE FIRST PRODUCED:		TEST DATE:		HOURS TESTED:		TEST PRODUCTION RATES: →		OIL - BBL:	GAS - MCF:	WATER - BBL:	PROD. METHOD:
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL - BBL:	GAS - MCF:	WATER - BBL:	INTERVAL STATUS:	

**INTERVAL C (As shown in item #26)**

DATE FIRST PRODUCED:		TEST DATE:		HOURS TESTED:		TEST PRODUCTION RATES: →		OIL - BBL:	GAS - MCF:	WATER - BBL:	PROD. METHOD:
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL - BBL:	GAS - MCF:	WATER - BBL:	INTERVAL STATUS:	

**INTERVAL D (As shown in item #26)**

DATE FIRST PRODUCED:		TEST DATE:		HOURS TESTED:		TEST PRODUCTION RATES: →		OIL - BBL:	GAS - MCF:	WATER - BBL:	PROD. METHOD:
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	OIL - BBL:	GAS - MCF:	WATER - BBL:	INTERVAL STATUS:	

**32. DISPOSITION OF GAS (Sold, Used for Fuel, Vented, Etc.)**

**33. SUMMARY OF POROUS ZONES (Include Aquifers):**

Show all important zones of porosity and contents thereof: Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

**34. FORMATION (Log) MARKERS:**

Formation	Top (MD)	Bottom (MD)	Descriptions, Contents, etc.	Name	Top (Measured Depth)
Green River	2,483				
Garden Gultch	5,114				
Douglas Creek	5,902				
Black Shale	6,588				
Castle Peak	6,688				
Uteland Butte	7,067				
Wasatch	7,224				
TD	7,725				

**35. ADDITIONAL REMARKS (Include plugging procedure)**

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records.

NAME (PLEASE PRINT) April Wilkerson

TITLE Regulatory Analyst

SIGNATURE \_\_\_\_\_

DATE 6/28/2013

This report must be submitted within 30 days of

- completing or plugging a new well
- drilling horizontal laterals from an existing well bore
- recompleting to a different producing formation
- reentering a previously plugged and abandoned well
- significantly deepening an existing well bore below the previous bottom-hole depth
- drilling hydrocarbon exploratory holes, such as core samples and stratigraphic tests

\* ITEM 20: Show the number of completions if production is measured separately from two or more formations.

\*\* ITEM 24: Cement Top - Show how reported top(s) of cement were determined (circulated (CIR), calculated (CAL), cement bond log (CBL), temperature survey (TS)).

Send to: Utah Division of Oil, Gas and Mining  
1594 West North Temple, Suite 1210  
Box 145801  
Salt Lake City, Utah 84114-5801

Phone: 801-538-5340

Fax: 801-359-3940