

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT ☐

APPLICATION FOR PERMIT TO DRILL						1. WELL NAME and NUMBER NBU 920-22N4BS			
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>						3. FIELD OR WILDCAT NATURAL BUTTES			
4. TYPE OF WELL Gas Well <input type="checkbox"/> Coalbed Methane Well: NO <input type="checkbox"/>						5. UNIT or COMMUNITIZATION AGREEMENT NAME NATURAL BUTTES			
6. NAME OF OPERATOR KERR-MCGEE OIL & GAS ONSHORE, L.P.						7. OPERATOR PHONE 720 929-6515			
8. ADDRESS OF OPERATOR P.O. Box 173779, Denver, CO, 80217						9. OPERATOR E-MAIL julie.jacobson@anadarko.com			
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) UTU0577A			11. MINERAL OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>			12. SURFACE OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input checked="" type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>			
13. NAME OF SURFACE OWNER (if box 12 = 'fee')						14. SURFACE OWNER PHONE (if box 12 = 'fee')			
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')						16. SURFACE OWNER E-MAIL (if box 12 = 'fee')			
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN') The Ute Indian Tribe			18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input checked="" type="checkbox"/> (Submit Commingling Application) NO <input type="checkbox"/>			19. SLANT VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/>			

20. LOCATION OF WELL	FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN
LOCATION AT SURFACE	1200 FSL 2401 FWL	SESW	22	9.0 S	20.0 E	S
Top of Uppermost Producing Zone	551 FSL 2078 FWL	SESW	22	9.0 S	20.0 E	S
At Total Depth	551 FSL 2078 FWL	SESW	22	9.0 S	20.0 E	S

21. COUNTY UINTAH		22. DISTANCE TO NEAREST LEASE LINE (Feet) 551		23. NUMBER OF ACRES IN DRILLING UNIT 2560	
		25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 858		26. PROPOSED DEPTH MD: 11768 TVD: 11108	
27. ELEVATION - GROUND LEVEL 4947		28. BOND NUMBER WYB000291		29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 43-8496	

Hole, Casing, and Cement Information										
String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement	Sacks	Yield	Weight
Surf	11	8.625	0 - 2980	28.0	J-55 LT&C	0.2	Type V	180	1.15	15.8
							Class G	270	1.15	15.8
Prod	7.875	4.5	0 - 11768	11.6	HCP-110 LT&C	12.5	Premium Lite High Strength	370	3.38	12.0
							50/50 Poz	1670	1.31	14.3

ATTACHMENTS	
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES	
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)	<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)	<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP

NAME Cara Mahler	TITLE Regulatory Analyst I	PHONE 720 929-6029
SIGNATURE	DATE 12/05/2012	EMAIL cara.mahler@anadarko.com
API NUMBER ASSIGNED 43047533790000	APPROVAL <div style="text-align: center;"> Permit Manager </div>	

Kerr-McGee Oil & Gas Onshore. L.P.**NBU 920-22N48S**

Surface: 1200 FSL / 2401 FWL SESW
 BHL: 551 FSL / 2078 FWL SESW

Section 22 T9S R20E

Unitah County, Utah
 Mineral Lease: UTU 0577-A

ONSHORE ORDER NO. 1**DRILLING PROGRAM**

- 1. & 2.a** **Estimated Tops of Important Geologic Markers:**
Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

<u>Formation</u>	<u>Depth</u>	<u>Resource</u>
Uinta	0 - Surface	
Green River	1,808'	
Birds Nest	2,033'	Water
Mahogany	2,530'	Water
Wasatch	5,182'	Gas
Mesaverde	7,467'	Gas
Sego	10,687'	Gas
Castlegate	10,778'	Gas
Blackhawk	11,087'	Gas
TVD =	11,687'	
TD =	11,768'	

- 2.c** Kerr McGee Oil & Gas Onshore LP (Kerr McGee) may elect to drill to (i) the Blackhawk formation (part of the Mesaverde Group), (ii) to a shallower depth within the Mesaverde Group, or (iii) to the Wasatch Formation. If Kerr McGee drills to the Blackhawk formation, please refer to Blackhawk as the bottom formation. The attached Blackhawk Drilling Program includes Total Vertical Depth, Total Depth, and appropriate casing and cement programs for the deeper formation.

If Kerr-McGee drills to a shallower depth in the Mesaverde Group or to the Wasatch Formation, please refer to the attached Wasatch/Mesaverde Drilling Program which includes Total Vertical Depth, Total Depth, and appropriate casing and cement programs for the shallower formations.

- 3.** **Pressure Control Equipment** (Schematic Attached)

Please refer to the attached Blackhawk Drilling Program and the Wasatch/Mesaverde Drilling Program

- 4.** **Proposed Casing & Cementing Program:**

Please refer to the attached Blackhawk Drilling Program and the Wasatch/Mesaverde Drilling Program

- 5.** **Drilling Fluids Program:**

Please refer to the attached Blackhawk Drilling Program and the Wasatch/Mesaverde Drilling Program

- 6.** **Evaluation Program:**

Please refer to the attached Blackhawk Drilling Program and the Wasatch/Mesaverde Drilling Program

- 7.** **Abnormal Conditions:**

7.a Blackhawk (Part of Mesaverde Group)

Maximum anticipated bottom hole pressure calculated at 11687' TVD, approximately equals
 7,480 psi (0.64 psi/ft = actual bottomhole gradient)

Maximum Anticipated Bottom Hole Pressure (MABHP) = Pore Pressure at TD

Maximum anticipated surface pressure equals approximately 4,892 psi (bottom hole pressure
 minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot, per Onshore Order No. 2).

Per Onshore Order No. 2 - Max Anticipated Surf. Press.(MASP) = (Pore Pressure at next csg point-
 (0.22 psi/ft-partial evac gradient x TVD of next csg point))

7.b Wasach Formation/Mesaverde Group

Maximum anticipated bottom hole pressure calculated at 10687' TVD, approximately equals
 6,519 psi (0.61 psi/ft = actual bottomhole gradient)

Maximum Anticipated Bottom Hole Pressure (MABHP) = Pore Pressure at TD

Maximum anticipated surface pressure equals approximately 4,196 psi (bottom hole pressure
 minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot, per Onshore Order No. 2).

Per Onshore Order No. 2 - Max Anticipated Surf. Press.(MASP) = (Pore Pressure at next csg point-
 (0.22 psi/ft-partial evac gradient x TVD of next csg point))

8. Anticipated Starting Dates:

Drilling is planned to commence immediately upon approval of this application.

9. Variances:

Please refer to the attached Blackhawk Drilling Program and the Wasatch/Mesaverde Drilling Program
 Onshore Order #2 – Air Drilling Variance

Kerr-McGee Oil & Gas Onshore LP (KMG) respectfully requests a variance to several requirements
 associated with air drilling outlined in Onshore Order 2

- Blowout Prevention Equipment (BOPE) requirements;
- Mud program requirements; and
- Special drilling operation (surface equipment placement) requirements associated
 with air drilling.

This Standard Operating Practices addendum provides supporting information as to why KMG current
 air drilling practices for constructing the surface casing hole should be granted a variance to Onshore
 Order 2 air drilling requirements.

The reader should note that the air rig is used only to construct a stable surface casing hole through a
 historically difficult lost circulation zone. A conventional rotary rig follows the air rig, and is used to
 drill and construct the majority of the wellbore.

More notable, KMG has used the air rig layout and procedures outlined below to drill the surface casing
 hole in approximately 675 wells without incident of blow out or loss of life.

Background

In a typical well, KMG utilizes an air rig for drilling the surface casing hole, an interval from the
 surface to surface casing depths, which varies in depth from 1,700 to 2,800 feet. The air rig drilling
 operation does not drill through productive or over pressured formations in KMG field, but does
 penetrate the Uinta and Green River Formations. The purpose of the air drilling operation is to overcome
 the severe loss circulation zone in the Green River known as the Bird's Nest while creating a stable hole
 for the surface casing. The surface casing hole is generally drilled to approximately 500 feet below the
 Bird's Nest.

Before the surface air rig is mobilized, a rathole rig is utilized to set and cement conductor pipe through
 a competent surface formation. Generally, the conductor is set at 40 feet. In some cases, conductor may

be set deeper in areas that the surface formation is not found competent. This rig also drills the rat and mouse holes in preparation for the surface casing and production string drilling operations.

The air rig is then mobilized to drill the surface casing hole by drilling a 12 1/4 inch hole for the first 200 feet, then will drill a 11 inch hole to just above the Bird's Nest interval with an air hammer. The hammer is then tripped and replaced with a 11 inch tri-cone bit. The tri-cone bit is used to drill to the surface casing point, approximately 500 feet below the loss circulation zone (Bird's Nest). The 8-5/8 inch surface casing is then run and cemented in place, thereby isolating the lost circulation zone.

KMG fully appreciates Onshore Order 2 well control and safety requirements associated with a typical air drilling operations. However, the requirements of Onshore Order 2 are excessive with respect to the air rig layout and drilling operation procedures that are currently in practice to drill and control the surface casing hole in KMG Fields.

Variance for BOPE Requirements

The air rig operation utilizes a properly lubricated and maintained air bowl diverter system which diverts the drilling returns to a six-inch blooie line. The air bowl is the only piece of BOPE equipment which is installed during drilling operations and is sufficient to contain the air returns associated with this drilling operation. As was discussed earlier, the drilling of the surface hole does not encounter any over pressured or productive zones, and as a result standard BOPE equipment should not be required. In addition, standard drilling practices do not support the use of BOPE on 40 feet of conductor pipe.

Variance for Mud Material Requirements

Onshore Order 2 also states that sufficient quantities of mud materials shall be maintained or readily accessible for the purpose of assuring adequate well control. Once again, the surface hole drilling operations does not encounter over pressured or productive intervals, and as a result there is not a need to control pressure in the surface hole with a mud system. Instead of mud, the air rigs utilize water from the reserve pit for well control, if necessary. A skid pump which is located near the reserve pit (see attachment) will supply the water to the well bore.

Variance for Special Drilling Operation (surface equipment placement) Requirements

Onshore Order 2 requires specific safety distances or setbacks for the placement of associated standard air drilling equipment, wellbore, and reserve pits. The air rigs used to drill the surface holes are not typical of an air rig used to drill a producing hole in other parts of the US. These are smaller in nature and designed to fit a KMG location. The typical air rig layout for drilling surface hole in the field is attached.

Typically the blooie line discharge point is required to be 100 feet from the well bore. In the case of a KMG well, the reserve pit is only 45 feet from the rig and is used for the drill cuttings. The blooie line, which transports the drill cuttings from the well to the reserve pit, subsequently discharges only 45 feet from the well bore.

Typically the air rig compressors are required to be located in the opposite direction from the blooie line and a minimum of 100 feet from the well bore. At the KMG locations, the air rig compressors are approximately 40 feet from the well bore and approximately 60 feet from the blooie line discharge due to the unique air rig design. The air compressors (see attachment) are located on the rig (1250 cfm) and on a standby trailer (1170 cfm). A booster sits between the two compressors and boosts the output from 350 psi to 2000 psi. The design does put the booster and standby compressor opposite from the blooie line.

Lastly, Onshore Order 2 addresses the need for an automatic igniter or continuous pilot light on the blooie line. The air rig does not utilize an igniter as the surface hole drilling operation does not encounter productive formations.

Variance for FIT Requirements

KMG also respectfully requests a variance to Onshore Order 2, Section III, Part Bi, for the pressure integrity test (PIT, also known as a formation integrity test (FIT)). This well is not an exploratory well and is being drilled in an area where the formation integrity is well known. Additionally, when an FIT is run with the mud weight as required, the casing shoe frequently breaks down and causes subsequent lost circulation when drilling the entire depth of the well.

Conclusion

The air rig operating procedures and the attached air rig layout have effectively maintained well control while drilling the surface holes in KMG Fields. KMG respectfully requests a variance from Onshore Order 2 with respect to air drilling well control requirements as discussed above.

10. Other Information:


Please refer to the attached Blackhawk Drilling Program and the Wasatch/Mesaverde Drilling Program



KERR-McGEE OIL & GAS ONSHORE LP

Blackhawk Drilling Program

COMPANY NAME	KERR-McGEE OIL & GAS ONSHORE LP					DATE	October 18, 2012		
WELL NAME	NBU 920-22N4BS					TD	11,687'	TVD	11,768' MD
FIELD	Natural Buttes	COUNTY	Uintah	STATE	Utah	FINISHED ELEVATION			4,943'
SURFACE LOCATION	SESW	1200 FSL	2401 FWL	Sec 22	T 9S	R 20E			
	Latitude:	40.016774	Longitude:	-109.652867	NAD 83				
BTM HOLE LOCATION	SESW	551 FSL	2078 FWL	Sec 22	T 9S	R 20E			
	Latitude:	40.014976	Longitude:	-109.653971	NAD 83				
OBJECTIVE ZONE(S)	BLACKHAWK (Part of the Mesaverde Group)								
ADDITIONAL INFO	Regulatory Agencies: BLM (Minerals), Ute Tribe (Surface), UDOGM Tri-County Health Dept.								

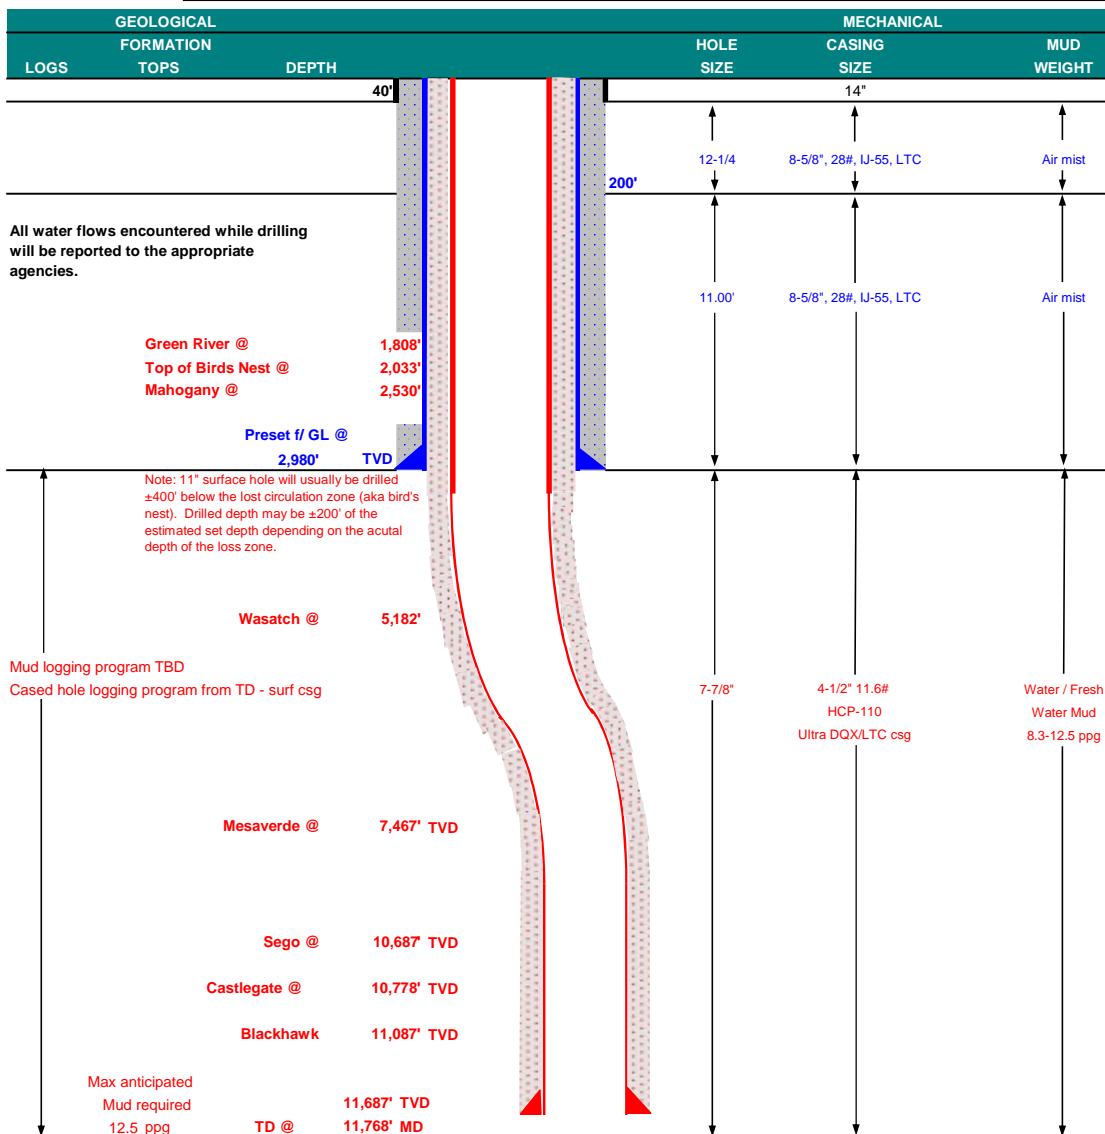



KERR-McGEE OIL & GAS ONSHORE LP

Blackhawk Drilling Program

CASING PROGRAM

	SIZE	INTERVAL	WT.	GR.	CPLG.	DESIGN FACTORS			
						BURST	COLLAPSE	LTC	DQX
								TENSION	
CONDUCTOR	14"	0-40'				3,390	1,880	348,000	N/A
SURFACE	8-5/8"	0 to 2,980	28.00	IJ-55	LTC	1.81	1.35	4.76	N/A
						10,690	8,650	279,000	367,174
PRODUCTION	4-1/2"	0 to 5,000	11.60	HCP-110	DQX	1.19	1.14		3.32
	4-1/2"	5,000 to 11,768'	11.60	HCP-110	LTC	1.19	1.14	4.39	

Surface Casing:

(Burst Assumptions: TD = 12.5 ppg)
Fracture at surface shoe with 0.1 psi/ft gas gradient above
(Collapse Assumption: Fully Evacuated Casing, Max MW)

0.73 psi/ft = frac gradient @ surface shoe

(Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)

Production casing:

(Burst Assumptions: Pressure test with 8.4ppg @ 9000 psi)
(Collapse Assumption: Fully Evacuated Casing, Max MW)

0.64 psi/ft = bottomhole gradient

(Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE	LEAD	500'	Premium cmt + 2% CaCl + 0.25 pps flocele	180	60%	15.80	1.15
Option 1							
	TOP OUT CMT (6 jobs)	1,200'	20 gals sodium silicate + Premium cmt + 2% CaCl + 0.25 pps flocele	270	0%	15.80	1.15
			NOTE: If well will circulate water to surface, option 2 will be utilized				
SURFACE	LEAD	2,480'	Premium cmt + 16% Gel + 10 pps gilsonite + 0.25 pps Flocele + 3% salt BWOC + GR 3 pps	300	35%	12.00	2.86
Option 2							
	TAIL	500'	Premium cmt + 2% CaCl + 0.25 pps flocele	150	35%	15.80	1.15
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.80	1.15
PRODUCTION	LEAD	4,678'	Premium Lite II + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	370	35%	12.00	3.38
	TAIL	7,090'	50/50 Poz/G + 10% salt + 2% gel + 0.002% FP-6L + 0.005 pps Static Free + 0.5% EC-1 + 0.9% R3 + 1.2% SMS	1,670	35%	14.30	1.31

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained

*Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe
PRODUCTION	Float shoe, 1 jt, float collar. 15 centralizers for a Mesaverde and 20 for a Blackhawk well. 1 centralizer on the first 3 joints and one every third joint thereafter.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 5M with one annular and 2 rams. The BOPE will be installed before the production hole is drilled and tested to 5,000 psi (annular to 2,500 psi) prior to drilling out the surface casing shoe. Record on chart recorder and tour sheet. Function test rams on each trip. Maintain safety valve and inside BOP on rig floor at all times. Most rigs have top drives; however, if used, the Kelly is to be equipped with upper and lower kelly valves.

Surveys will be taken at 1,000' minimum intervals.

Most rigs have PVT System for mud monitoring. If no PVT is available, visual monitoring will be utilized.

DRILLING ENGINEER:

Nick Spence / Danny Showers / Travis Hansell

DATE: _____

DRILLING SUPERINTENDENT:

Kenny Gathings / Lovel Young

DATE: _____



COMPANY NAME	KERR-McGEE OIL & GAS ONSHORE LP				DATE	October 18, 2012		
WELL NAME	NBU 920-22N4BS				TD	10,687'	TVD	10,768' MD
FIELD	Natural Buttes	COUNTY	Uintah	STATE	Utah	FINISHED ELEVATION		4,943'
SURFACE LOCATION	SESW	1200 FSL	2401 FWL	Sec 22	T 9S	R 20E		
	Latitude:	40.016774	Longitude:	-109.652867			NAD 83	
BTM HOLE LOCATION	SESW	551 FSL	2078 FWL	Sec 22	T 9S	R 20E		
	Latitude:	40.014976	Longitude:	-109.653971			NAD 83	
OBJECTIVE ZONE(S)	Wasatch Formation/Mesaverde Group							
ADDITIONAL INFO	Regulatory Agencies: BLM (Minerals), Ute Tribe (Surface), UDOGM Tri-County Health Dept.							

[illegible]



KERR-McGEE OIL & GAS ONSHORE LP

Wasatch/Mesaverde Drilling Program

CASING PROGRAM						DESIGN FACTORS			
	SIZE	INTERVAL	WT.	GR.	CPLG.	LTC		DQX	
						BURST	COLLAPSE	TENSION	
CONDUCTOR	14"	0-40'				3,390	1,880	348,000	N/A
SURFACE	8-5/8"	0 to 2,980	28.00	IJ-55	LTC	1.81	1.35	4.76	N/A
PRODUCTION						7,780	6,350		267,035
	4-1/2"	0 to 5,000	11.60	I-80	DQX	1.11	0.95		2.62
	4-1/2"	5,000 to 10,768'	11.60	HCP-110	LTC	1.53	1.30	223,000	4.08

Surface Casing:

(Burst Assumptions: TD = 12.0 ppg) 0.73 psi/ft = frac gradient @ surface shoe
 Fracture at surface shoe with 0.1 psi/ft gas gradient above
 (Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)

Production casing:

(Burst Assumptions: Pressure test with 8.4ppg @ 7000 psi) 0.61 psi/ft = bottomhole gradient
 (Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE Option 1	LEAD	500'	Premium cmt + 2% CaCl + 0.25 pps flocele	180	60%	15.80	1.15
	TOP OUT CMT (6 jobs)	1,200'	20 gals sodium silicate + Premium cmt + 2% CaCl + 0.25 pps flocele	270	0%	15.80	1.15
NOTE: If well will circulate water to surface, option 2 will be utilized							
SURFACE Option 2	LEAD	2,480'	Premium cmt + 16% Gel + 10 pps gilsonite + 0.25 pps Flocele + 3% salt BWOC + GR 3 pps	300	35%	12.00	2.86
	TAIL	500'	Premium cmt + 2% CaCl + 0.25 pps Flocele + 3% salt BWOC + GR 3 pps	150	35%	15.80	1.15
PRODUCTION	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.80	1.15
	LEAD	4,678'	Premium Lite II + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	370	35%	12.00	3.38
	TAIL	6,090'	50/50 Poz/G + 10% salt + 2% gel + 0.002% FP-6L + 0.005 pps Static Free + 0.5% EC-1 + 0.9% R3 + 1.2% SMS	1,440	35%	14.30	1.31

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained

*Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe
PRODUCTION	Float shoe, 1 jt, float collar. 15 centralizers for a Mesaverde and 20 for a Blackhawk well. 1 centralizer on the first 3 joints and one every third joint thereafter.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 5M with one annular and 2 rams. The BOPE will be installed before the production hole is drilled and tested to 5,000 psi (annular to 2,500 psi) prior to drilling out the surface casing shoe. Record on chart recorder and tour sheet. Function test rams on each trip. Maintain safety valve and inside BOP on rig floor at all times. Most rigs have top drives; however, if used, the Kelly is to be equipped with upper and lower kelly valves.

Surveys will be taken at 1,000' minimum intervals.

Most rigs have PVT System for mud monitoring. If no PVT is available, visual monitoring will be utilized.


DRILLING ENGINEER:

Nick Spence / Danny Showers / Travis Hansell

DATE:**DRILLING SUPERINTENDENT:**

Kenny Gathings / Lovel Young

DATE:

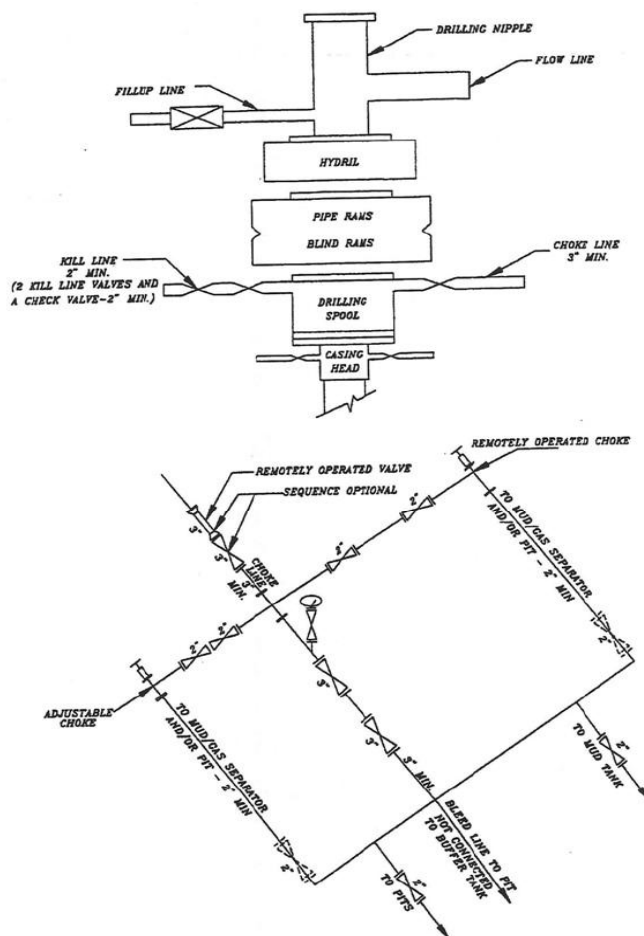
EXHIBIT A
NBU 920-22N4BS**SCHEMATIC DIAGRAM OF 5,000 PSI BOP STACK**

WELL NAME	SURFACE POSITION					BOTTOM HOLE				
	NAD83		NAD27		FOOTAGES	NAD83		NAD27		FOOTAGES
	LATITUDE	LONGITUDE	LATITUDE	LONGITUDE		LATITUDE	LONGITUDE	LATITUDE	LONGITUDE	
NBU 920-22N4BS	40°01'00.260"	109°39'12.814"	40°01'00.387"	109°39'10.321"	1200' FSL	40°00'53.787"	109°39'16.788"	40°00'53.915"	109°39'14.295"	551' FSL
	40.016739°	109.653559°	40.016774°	109.652867°	2401' FWL	40.014941°	109.654663°	40.014976°	109.653971°	2078' FWL
NBU 920-22N1BS	40°01'00.343"	109°39'12.744"	40°01'00.470"	109°39'10.251"	1209' FSL	40°00'59.722"	109°39'16.422"	40°00'59.849"	109°39'13.929"	1151' FSL
	40.016762°	109.653540°	40.016797°	109.652848°	2406' FWL	40.016589°	109.654562°	40.016625°	109.653869°	2119' FWL
NBU 920-22N1DS	40°01'00.426"	109°39'12.674"	40°01'00.553"	109°39'10.182"	1217' FSL	40°00'55.737"	109°39'09.682"	40°00'55.864"	109°39'07.190"	738' FSL
	40.016785°	109.653521°	40.016820°	109.652828°	2412' FWL	40.015482°	109.652690°	40.015518°	109.651997°	2635' FWL
NBU 920-22K4CS	40°01'00.509"	109°39'12.604"	40°01'00.636"	109°39'10.112"	1225' FSL	40°01'03.094"	109°39'15.575"	40°01'03.221"	109°39'13.082"	1491' FSL
	40.016808°	109.653501°	40.016843°	109.652809°	2418' FWL	40.017526°	109.654326°	40.017561°	109.653634°	2192' FWL

RELATIVE COORDINATES - From Surface Position to Bottom Hole

WELL NAME	NORTH	EAST	WELL NAME	NORTH	EAST	WELL NAME	NORTH	EAST	WELL NAME	NORTH	EAST
NBU 920-22N4BS	-655.0'	-309.5'	NBU 920-22N1BS	-62.8'	-286.2'	NBU 920-22N1DS	-474.7'	232.7'	NBU 920-22K4CS	261.7'	-231.1'

BASIS OF BEARINGS IS THE WEST LINE OF THE SW $\frac{1}{4}$ OF SECTION 22, T9S, R20E, S.L.B.&M. WHICH IS TAKEN FROM GLOBAL POSITIONING SATELLITE OBSERVATIONS TO BEAR N01°10'13"W.

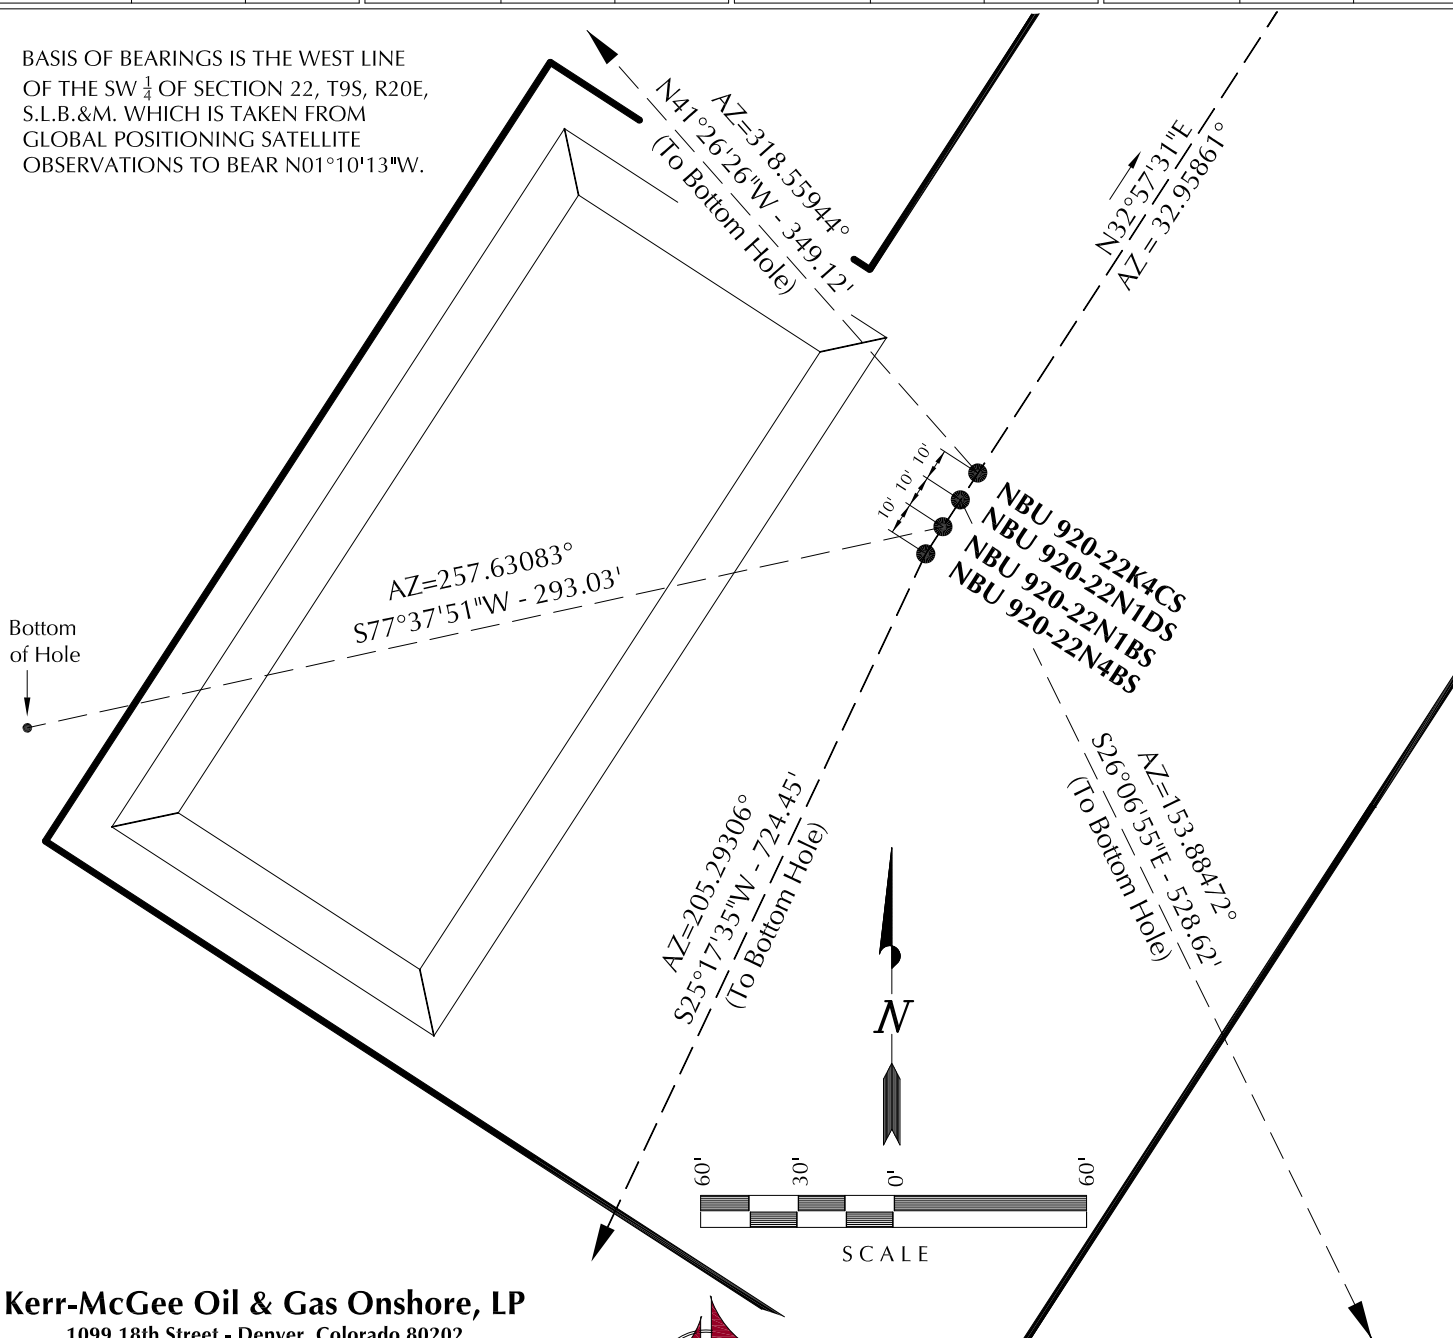

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD - NBU 920-22N

WELL PAD INTERFERENCE PLAT
WELLS - NBU 920-22N4BS, NBU 920-22N1BS,
NBU 920-22N1DS & NBU 920-22K4CS
LOCATED IN SECTION 22, T9S, R20E,
S.L.B.&M., UTAH COUNTY, UTAH.




CONSULTING, LLC
2155 North Main Street
Sheridan WY 82801
Phone 307-674-0609
Fax 307-674-0182

TIMBERLINE




(435) 789-1365

ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078

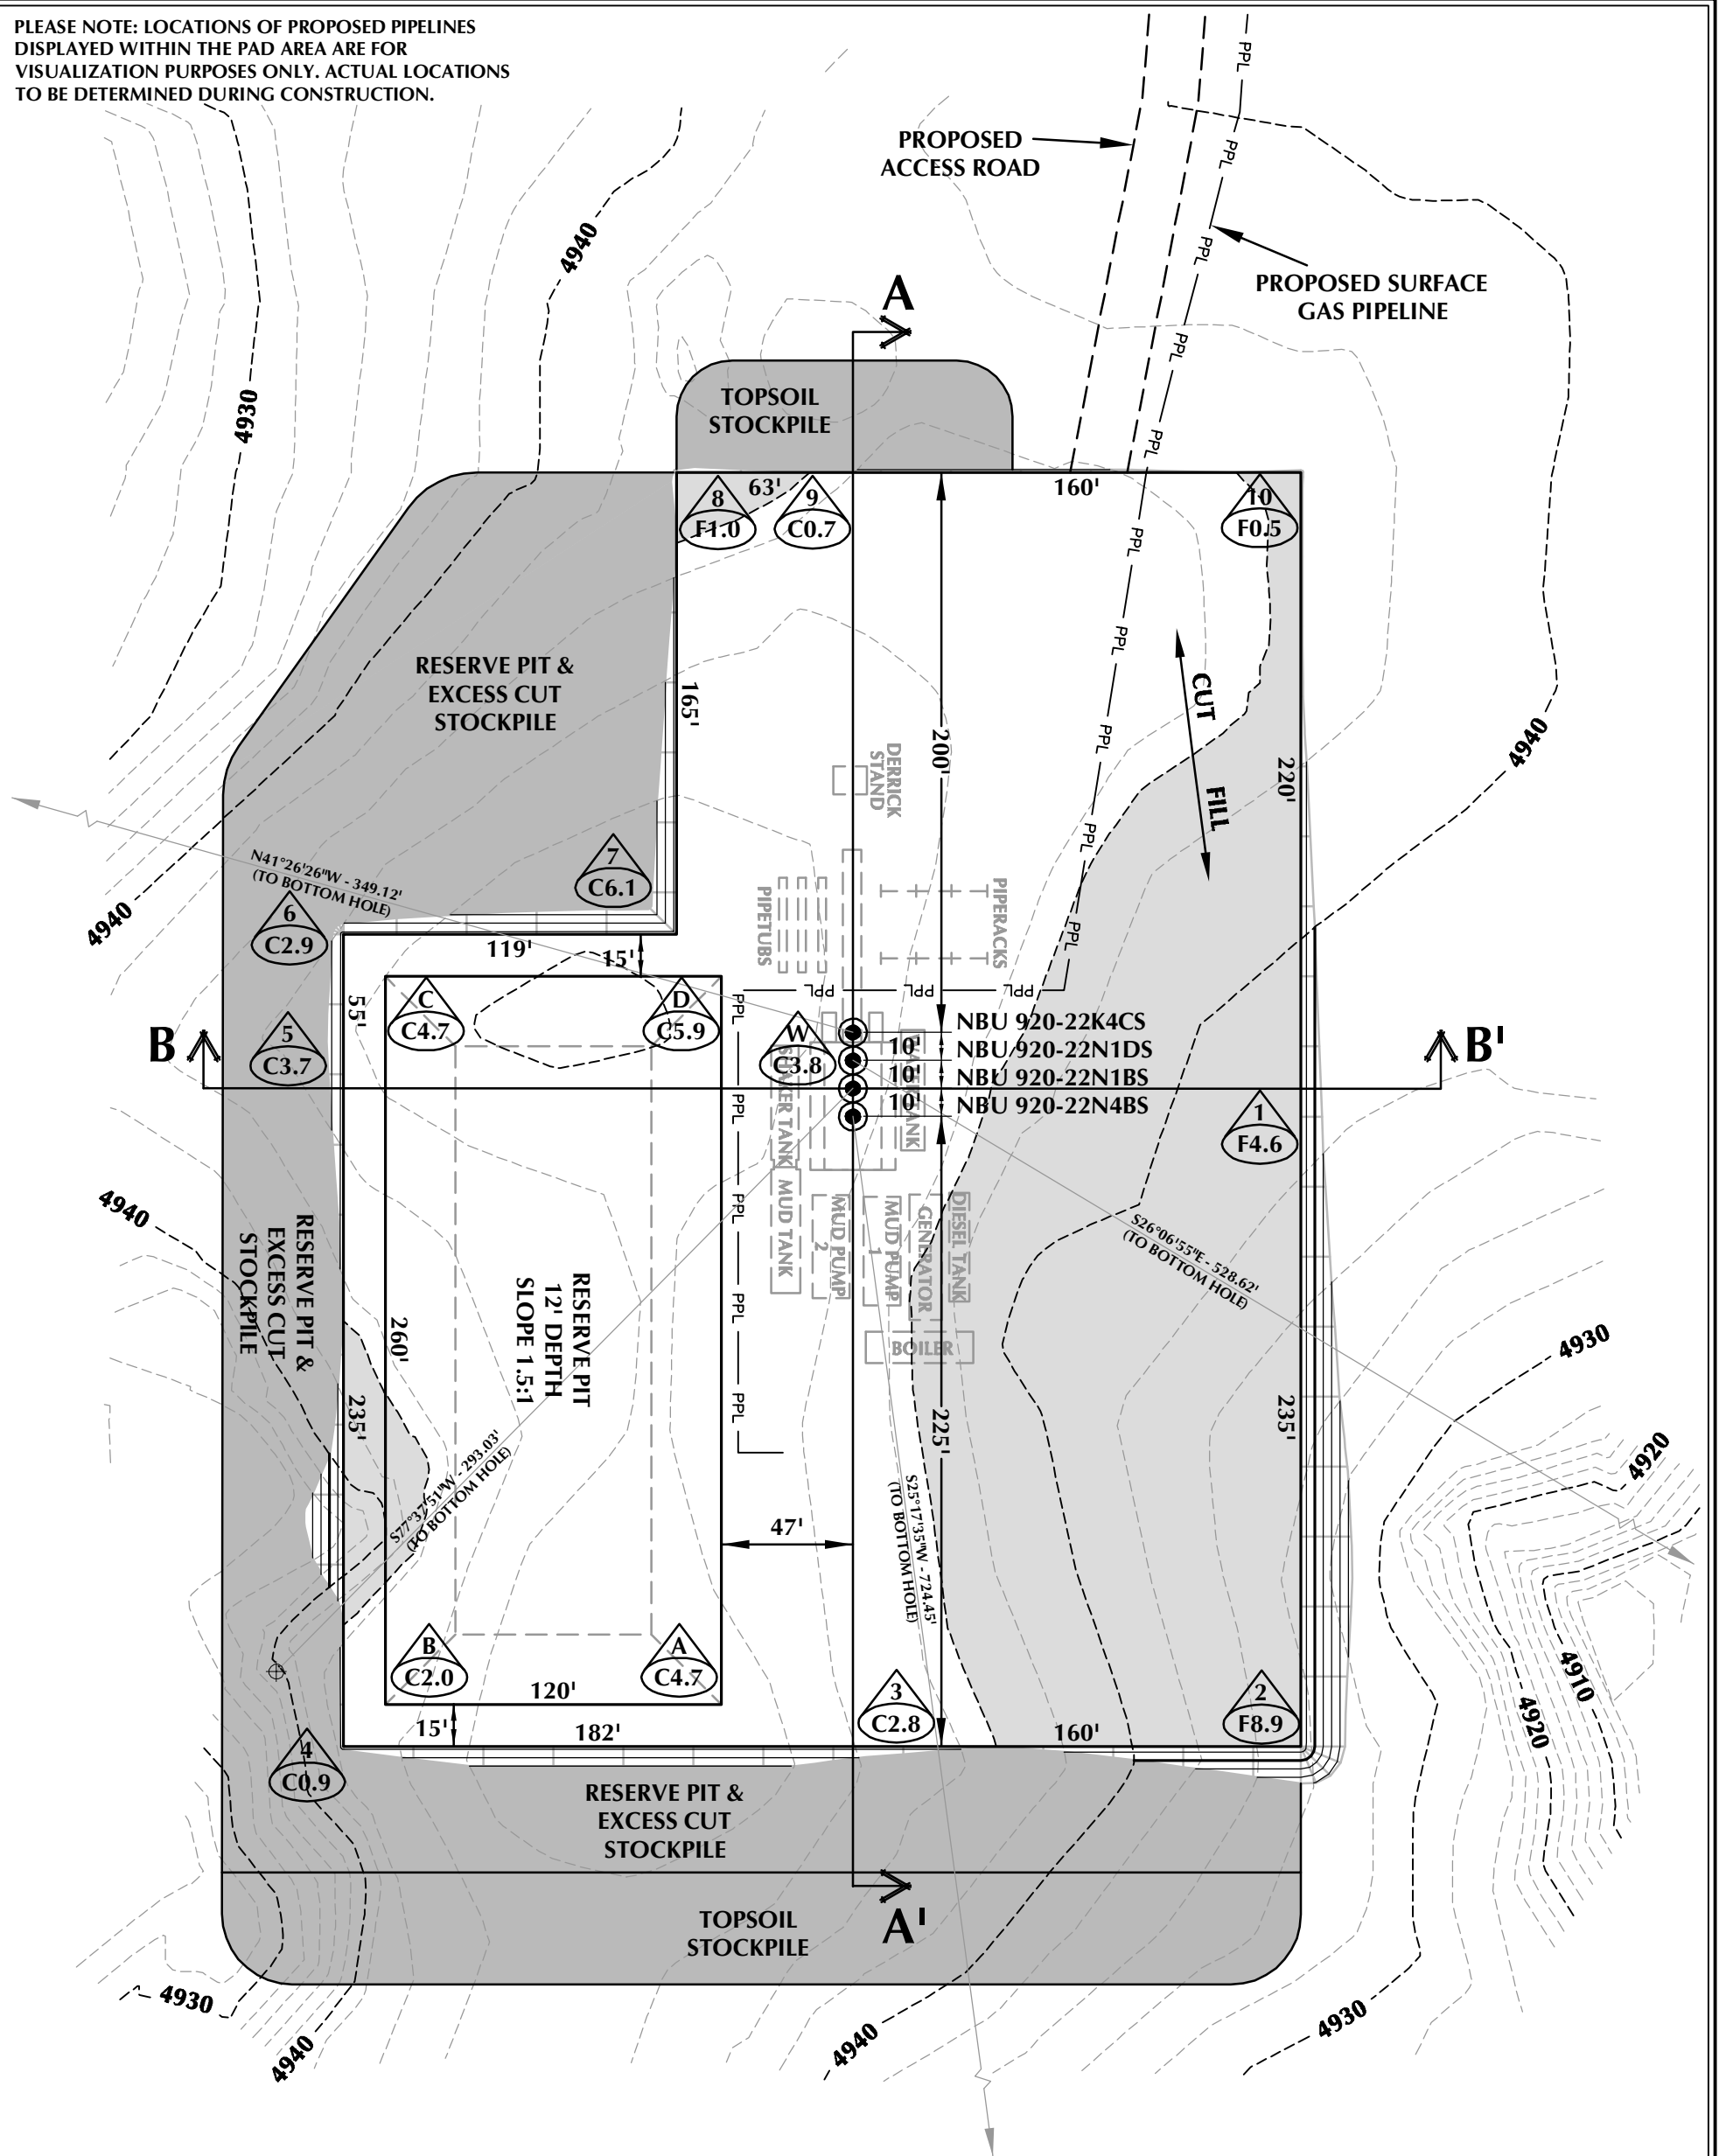DATE SURVEYED: 7-1-09	SURVEYED BY: M.S.B.	SHEET NO: 5 5 OF 16
DATE DRAWN: 11-30-09	DRAWN BY: E.M.S.	
SCALE: 1" = 60'	Date Last Revised: 8-31-12 J.G.C.	



TOTAL CUT FOR RESERVE PIT
+/- 11,020 C.Y.
RESERVE PIT CAPACITY (2' OF FREEBOARD)
+/- 42,290 BARRELS

	EXISTING WELL LOCATION
	PROPOSED WELL LOCATION
	PROPOSED BOTTOM HOLE LOCATION
----	EXISTING CONTOURS (2' INTERVAL)
----	PROPOSED CONTOURS (2' INTERVAL)
— PPL —	PROPOSED PIPELINE
— EPL —	EXISTING PIPELINE



2' CONTOURS

SCALE: 1"=60'	DATE: 1/7/10	SHEET NO: 6 6 OF 16
GRB REVISED: 9/14/12		

WELL PAD - NBU 920-22N

WELL PAD - LOCATION LAYOUT
NBU 920-22N4BS, NBU 920-22N1BS,
NBU 920-22N1DS & NBU 920-22K4CS
LOCATED IN SECTION 22, T9S, R20E,
S.L.B.&M., UTAH COUNTY, UTAH



CONSULTING, LLC
2155 North Main Street
Sheridan, WY 82801
Phone 307-674-0609
Fax 307-674-0182

TIMBERLINE (435) 789-1
ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078

(435) 789-1365

SCALE:

 $1''=60'$

1/7/10


SHEET NO:

6

5 OF 16

RECEIVED: December 05, 2012

PLEASE NOTE: LOCATIONS OF PROPOSED PIPELINES
DISPLAYED WITHIN THE PAD AREA ARE FOR
VISUALIZATION PURPOSES ONLY. ACTUAL LOCATIONS
TO BE DETERMINED DURING CONSTRUCTION.

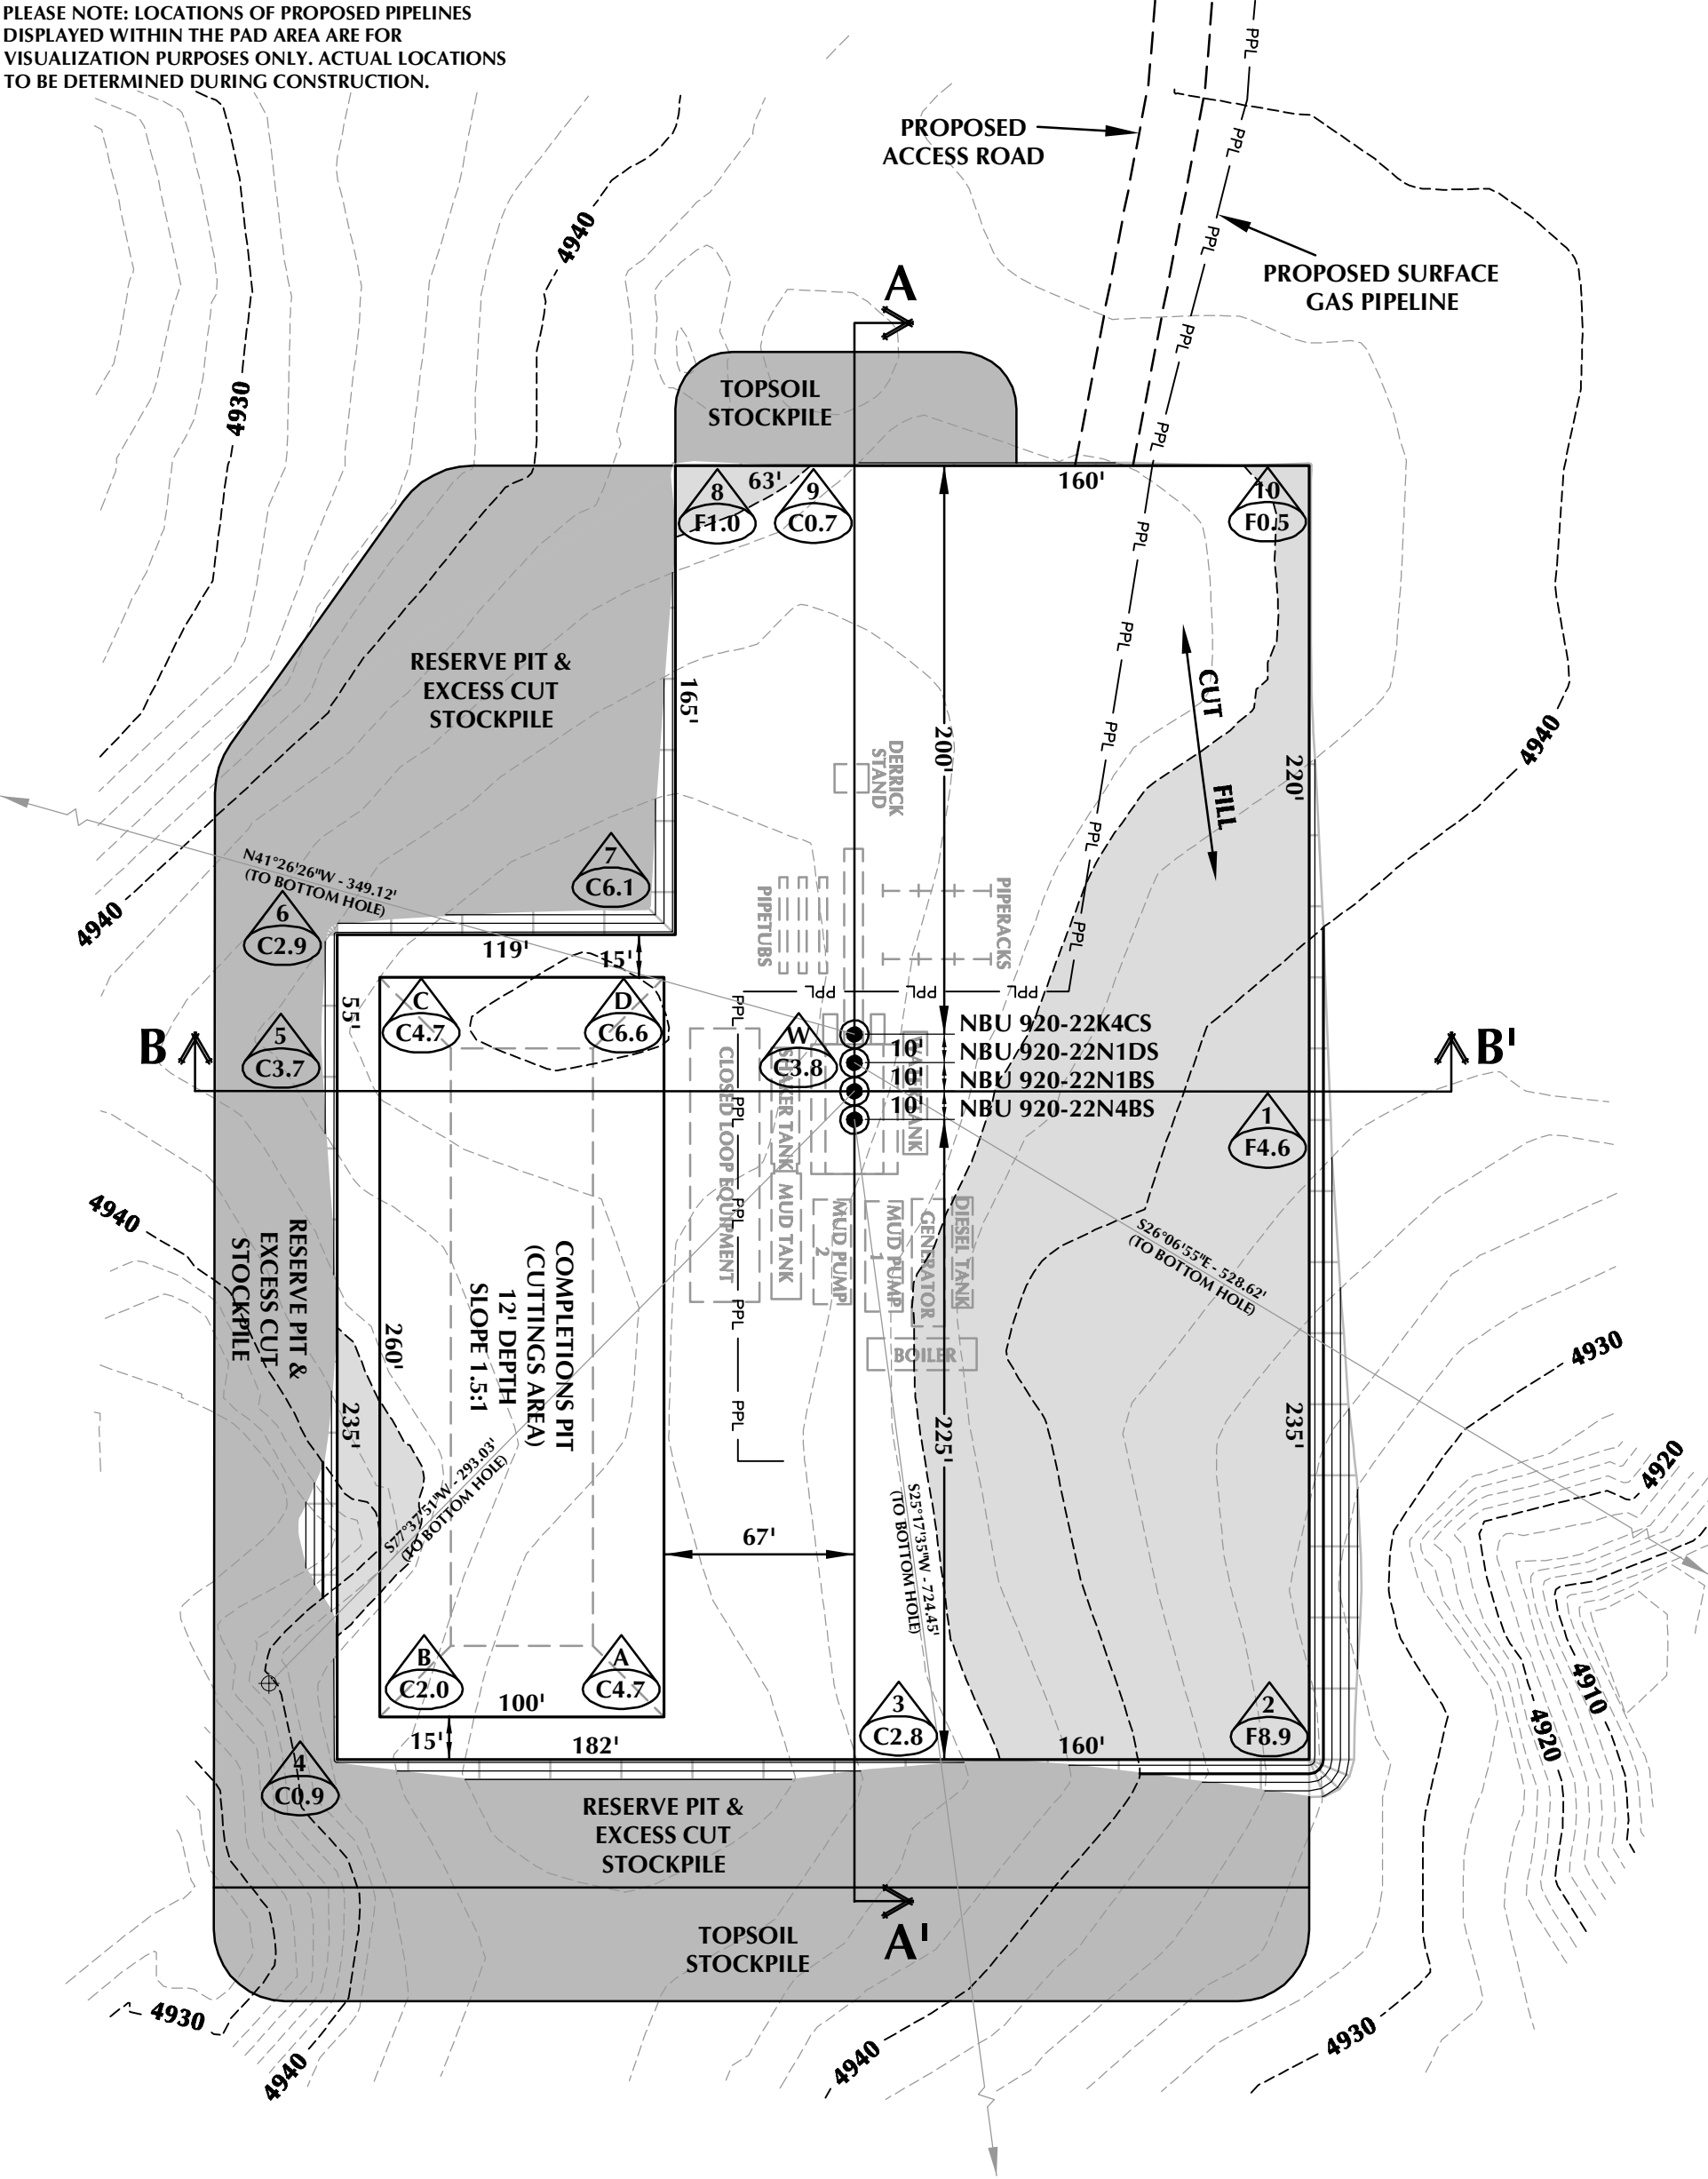

WELL PAD - NBU 920-22N (CLOSED LOOP) DESIGN SUMMARY

EXISTING GRADE @ CENTER OF WELL PAD = 4947.1'
FINISHED GRADE ELEVATION = 4943.3'
CUT SLOPES = 1.5:1
FILL SLOPES = 1.5:1
TOTAL WELL PAD AREA = 3.32 ACRES
TOTAL DISTURBANCE AREA = 4.88 ACRES
SHRINKAGE FACTOR = 1.10
SWELL FACTOR = 1.00

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD - NBU 920-22N

WELL PAD - LOCATION LAYOUT
NBU 920-22N4BS, NBU 920-22N1BS,
NBU 920-22N1DS & NBU 920-22K4CS
LOCATED IN SECTION 22, T9S, R20E,
S.L.B.&M., UTAH COUNTY, UTAH



CONSULTING, LLC
2155 North Main Street
Sheridan, WY 82801
Phone 307-674-0609
Fax 307-674-0182

WELL PAD QUANTITIES

TOTAL CUT FOR WELL PAD = 9,091 C.Y.
TOTAL FILL FOR WELL PAD = 7,639 C.Y.
TOPSOIL @ 6" DEPTH = 2,682 C.Y.
EXCESS MATERIAL = 1,452 C.Y.

COMPLETIONS PIT QUANTITIES

TOTAL CUT FOR COMPLETIONS PIT
+/- 8,870 C.Y.
COMPLETIONS PIT CAPACITY
(2' OF FREEBOARD)
+/- 33,770 BARRELS

WELL PAD LEGEND



- EXISTING WELL LOCATION
- PROPOSED WELL LOCATION
- PROPOSED BOTTOM HOLE LOCATION
- EXISTING CONTOURS (2' INTERVAL)
- PROPOSED CONTOURS (2' INTERVAL)
- PPL - PROPOSED PIPELINE
- EPL - EXISTING PIPELINE



HORIZONTAL 0 30' 60' 1" = 60'
2' CONTOURS

SCALE: 1"=60' DATE: 1/7/10 SHEET NO:
REVISED: GRB 9/14/12 6B 6B OF 16

TIMBERLINE
ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078

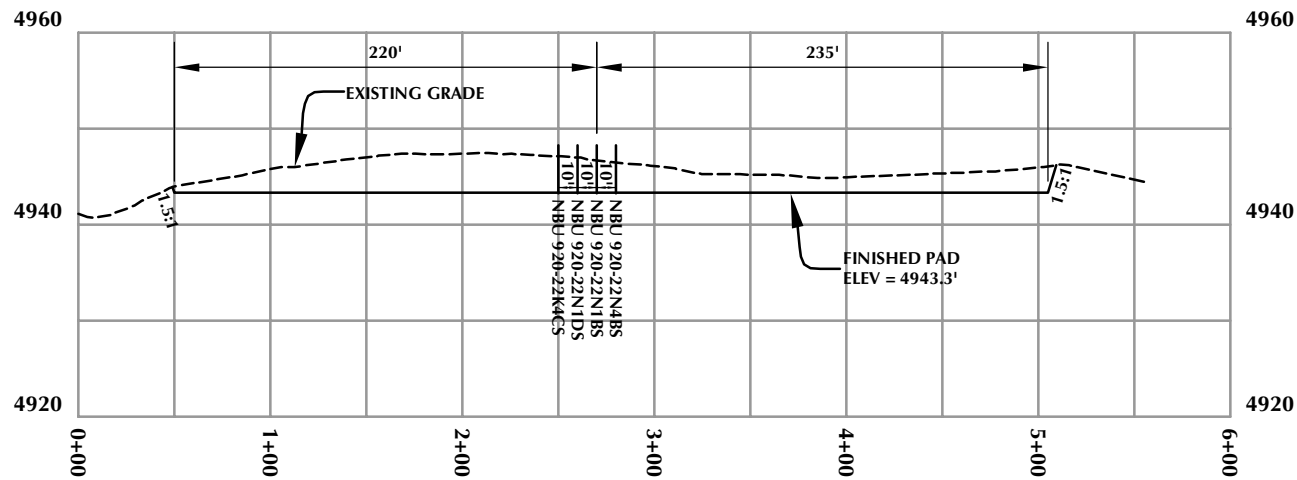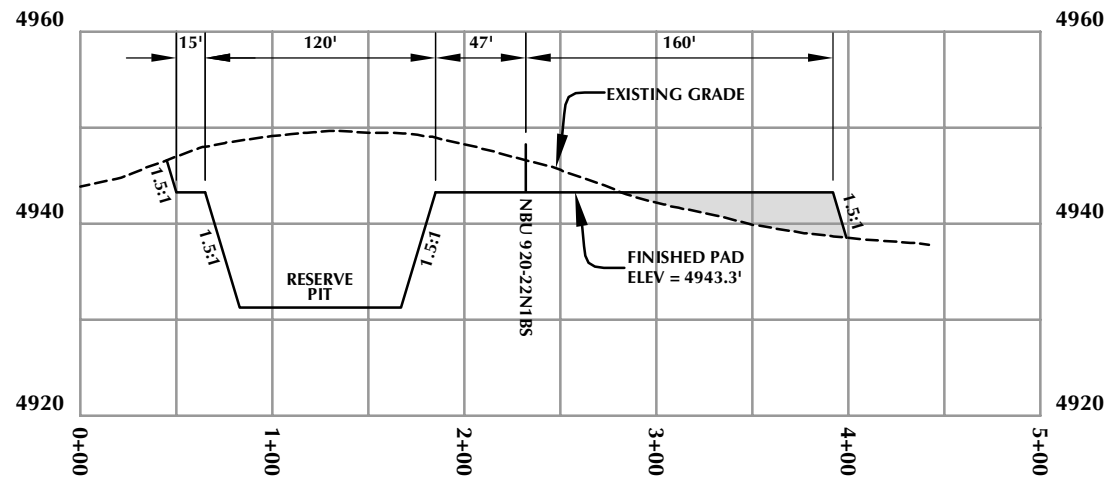**CROSS SECTION A-A'****CROSS SECTION B-B'**

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD - NBU 920-22N

WELL PAD - CROSS SECTIONS
NBU 920-22N4BS, NBU 920-22N1BS,
NBU 920-22N1DS & NBU 920-22K4CS
LOCATED IN SECTION 22, T9S, R20E,
S.L.B.&M., UINTAH COUNTY, UTAH



CONSULTING, LLC
2155 North Main Street
Sheridan, WY 82801
Phone 307-674-0609
Fax 307-674-0182

TIMBERLINE
ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078


(435) 789-1365

HORIZONTAL 0 50' 100' 1" = 100'
VERTICAL 0 10' 20' 1" = 20'

Scale: 1"=100'	Date: 1/7/10	SHEET NO:
REVISED:	GRB 9/14/12	7 7 OF 16

RECEIVED: December 05, 2012

- PLEASE NOTE:
1. LOCATIONS OF PROPOSED FACILITIES AND PROPOSED PIPELINES DISPLAYED WITHIN THE PAD AREA ARE FOR VISUALIZATION PURPOSES ONLY. ACTUAL LOCATIONS TO BE DETERMINED DURING CONSTRUCTION.
 2. ACTUAL RECLAMATION AREA TO BE DETERMINED DURING INTERIM RECLAMATION.

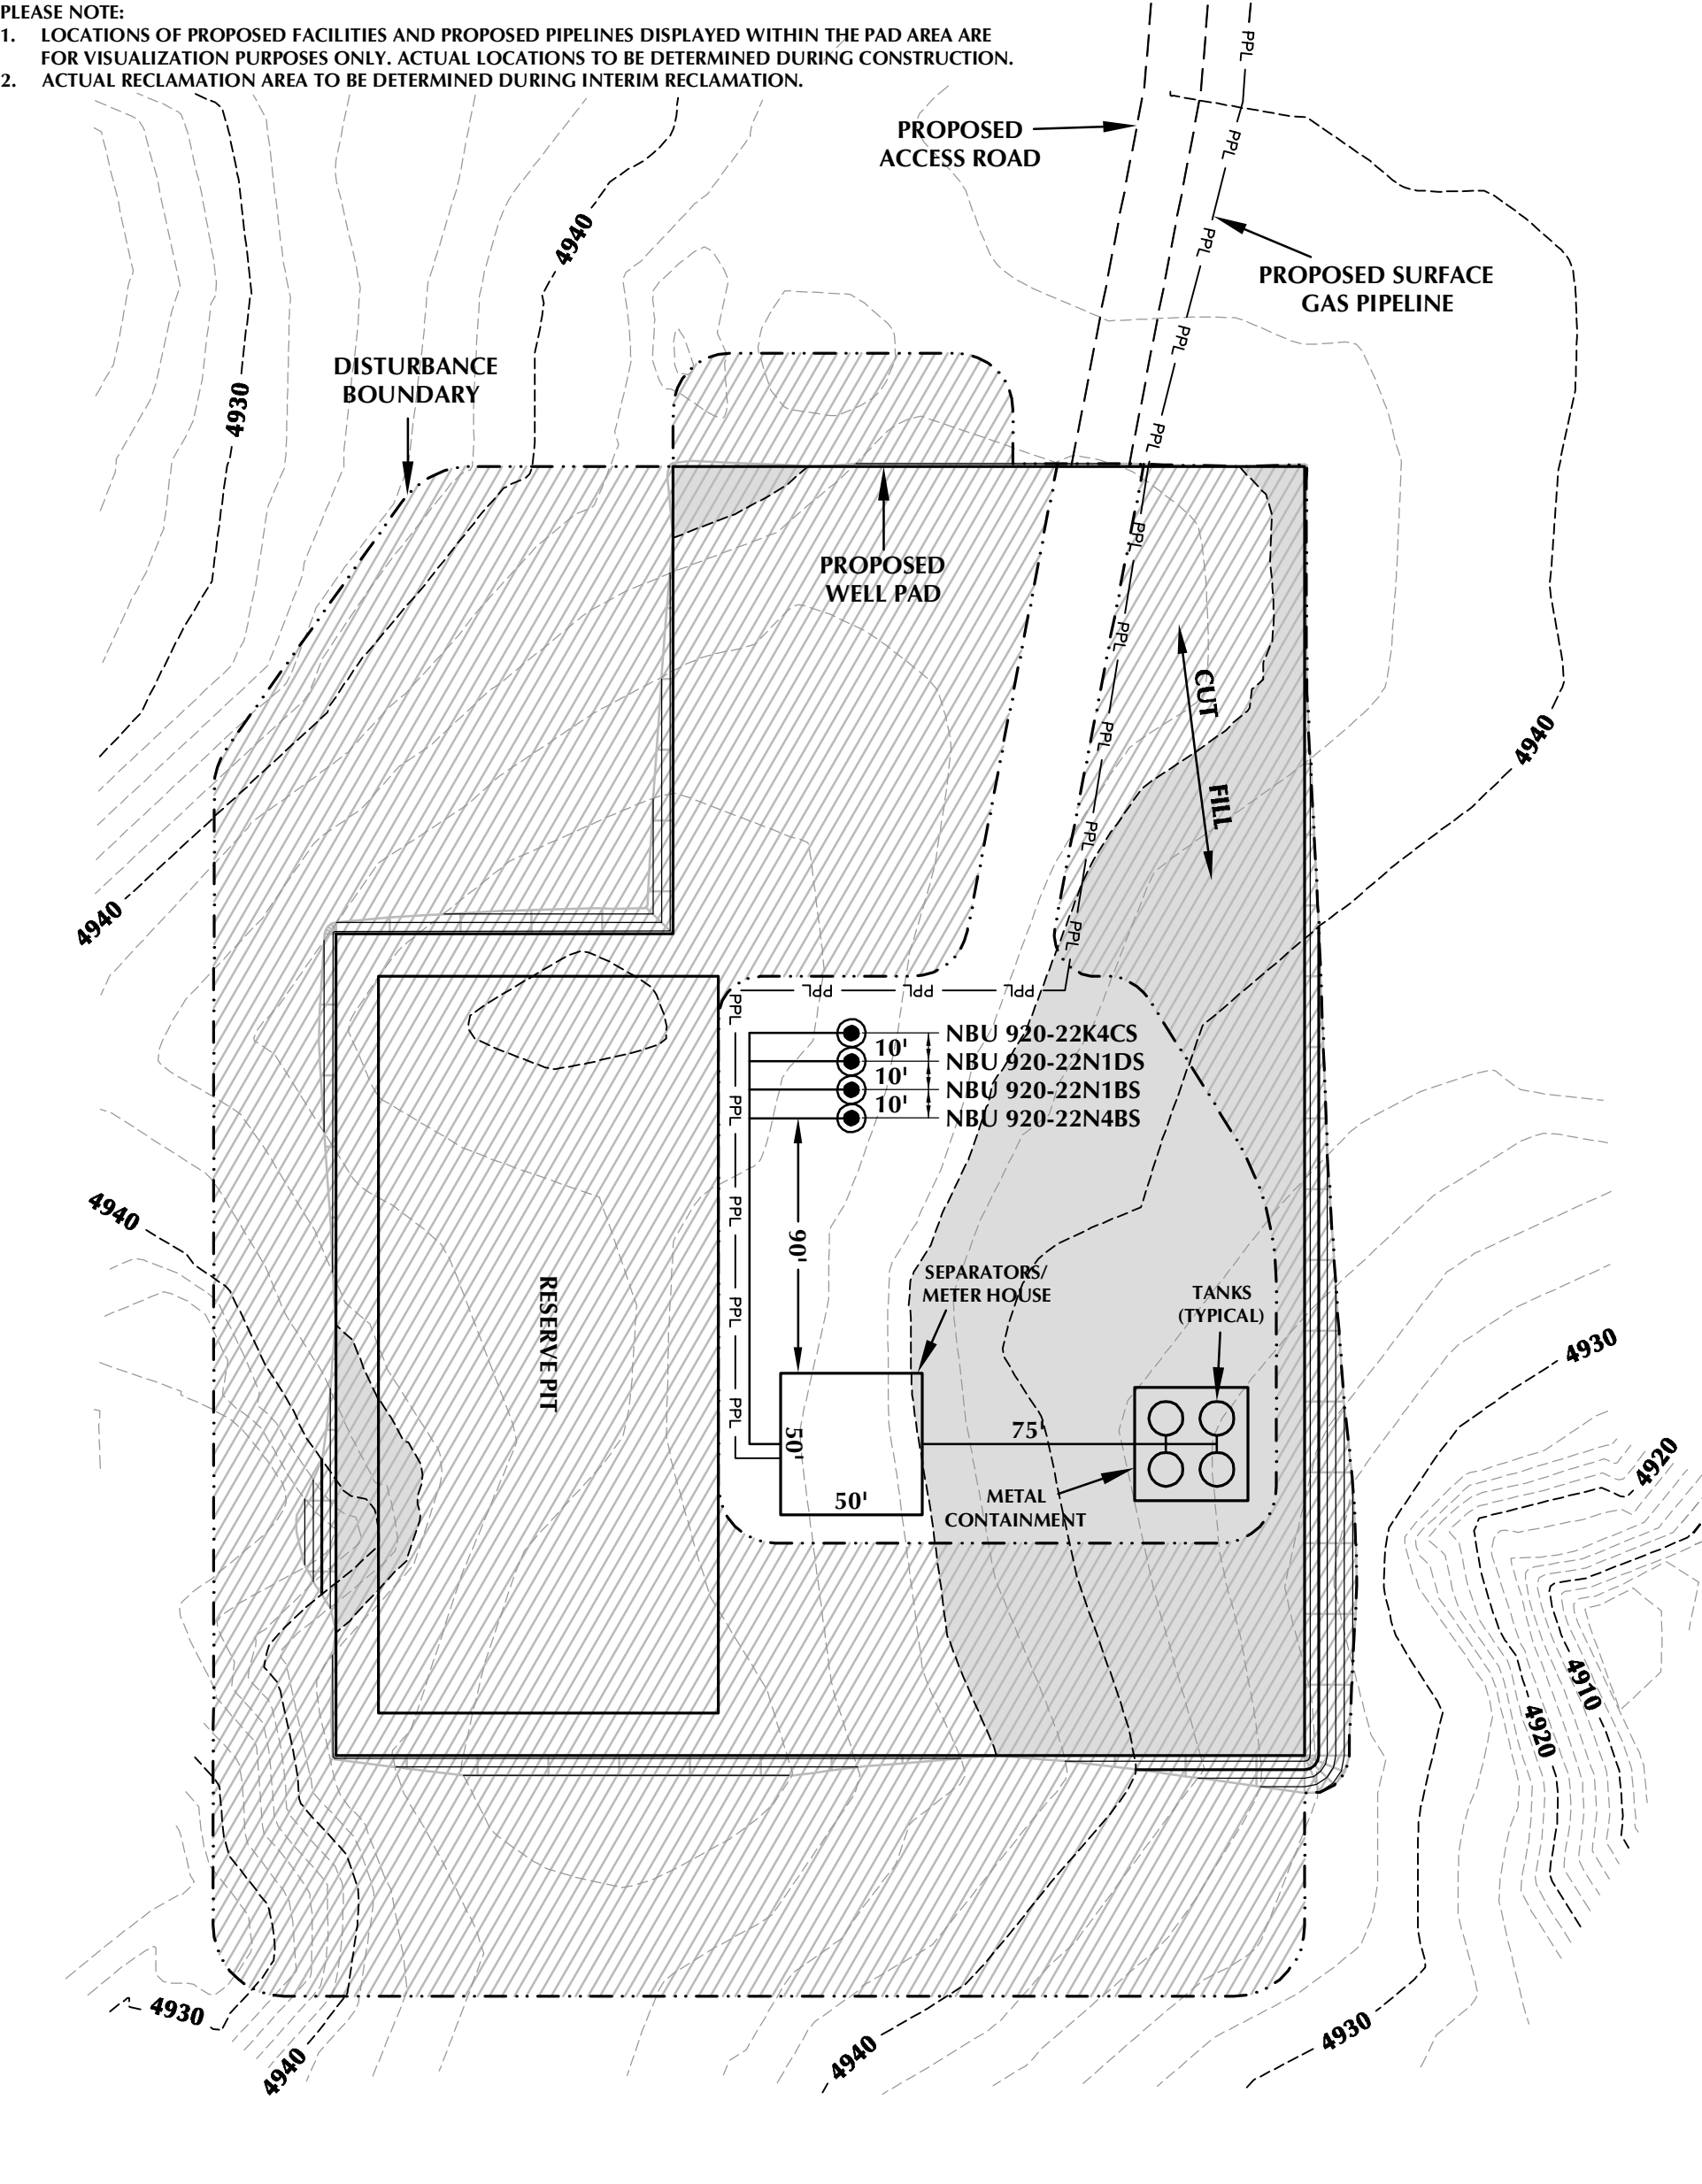

WELL PAD - NBU 920-22N RECLAMATION DESIGN SUMMARY

TOTAL DISTURBANCE AREA = 4.88 ACRES
RECLAMATION AREA = 3.89 ACRES
TOTAL WELL PAD AREA AFTER RECLAMATION = 0.99 ACRES

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD - NBU 920-22N

WELL PAD - RECLAMATION LAYOUT
NBU 920-22N4BS, NBU 920-22N1BS,
NBU 920-22N1DS & NBU 920-22K4CS
LOCATED IN SECTION 22, T9S, R20E,
S.L.B.&M., UINTAH COUNTY, UTAH



CONSULTING, LLC
2155 North Main Street
Sheridan, WY 82801
Phone 307-674-0609
Fax 307-674-0182

TIMBERLINE
ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078

(435) 789-1365

WELL PAD LEGEND

- EXISTING WELL LOCATION
- PROPOSED WELL LOCATION
- EXISTING CONTOURS (2' INTERVAL)
- PROPOSED CONTOURS (2' INTERVAL)
- PPL - PROPOSED PIPELINE
- EPL - EXISTING PIPELINE
- RECLAMATION AREA



HORIZONTAL 0 30' 60' 1" = 60'
2' CONTOURS

SCALE: 1"=60'	DATE: 1/7/10	SHEET NO:
REVISED:	GRB 9/14/12	8 8 OF 16

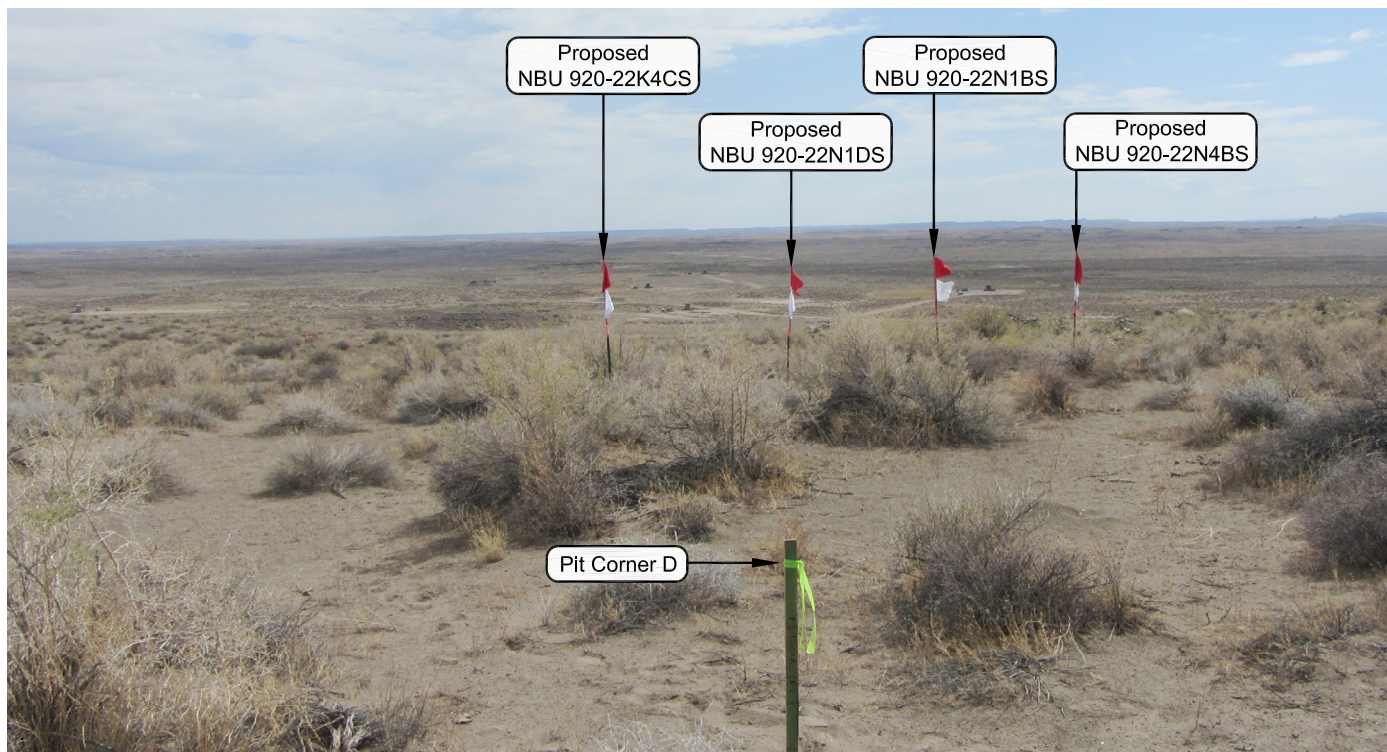


PHOTO VIEW: FROM PIT CORNER D TO LOCATION STAKE

CAMERA ANGLE: SOUTHEASTERLY

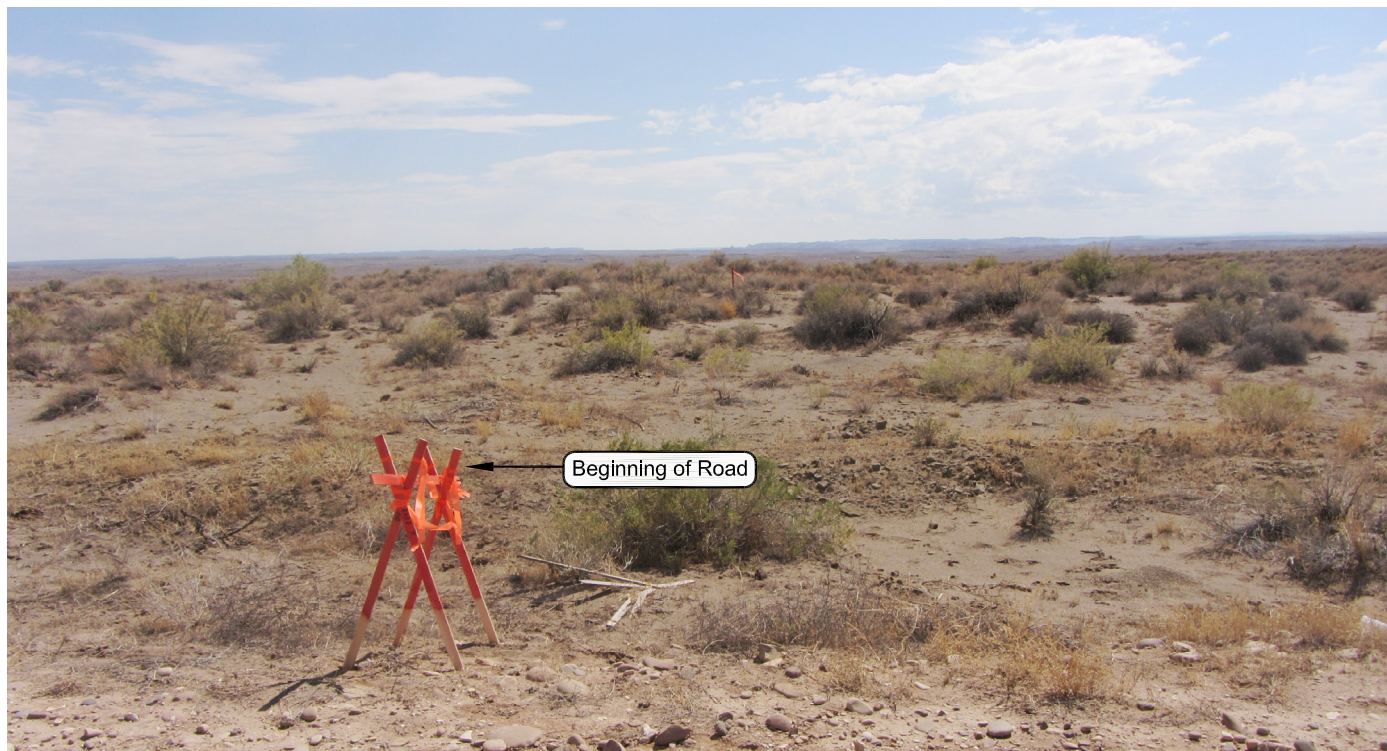


PHOTO VIEW: FROM BEGINNING OF PROPOSED ROAD

CAMERA ANGLE: SOUTHERLY

Kerr-McGee Oil & Gas Onshore, LP
1099 18th Street - Denver, Colorado 80202

WELL PAD - NBU 920-22N

LOCATION PHOTOS

NBU 920-22N4BS, NBU 920-22N1BS,
NBU 920-22N1DS & NBU 920-22K4CS
LOCATED IN SECTION 22, T9S, R20E,
S.L.B.&M., UTAH COUNTY, UTAH.



CONSULTING, LLC
2155 North Main Street
Sheridan WY 82801
Phone 307-674-0609
Fax 307-674-0182

TIMBERLINE

(435) 789-1365

ENGINEERING & LAND SURVEYING, INC.
209 NORTH 300 WEST - VERNAL, UTAH 84078

DATE SURVEYED:
7-1-09

SURVEYED BY: M.S.B.

SHEET NO:

DATE DRAWN:
7-7-09


DRAWN BY: E.M.S.

9

Date Last Revised: 8-31-12 J.G.C.

9 OF 16

RECEIVED: December 05, 2012

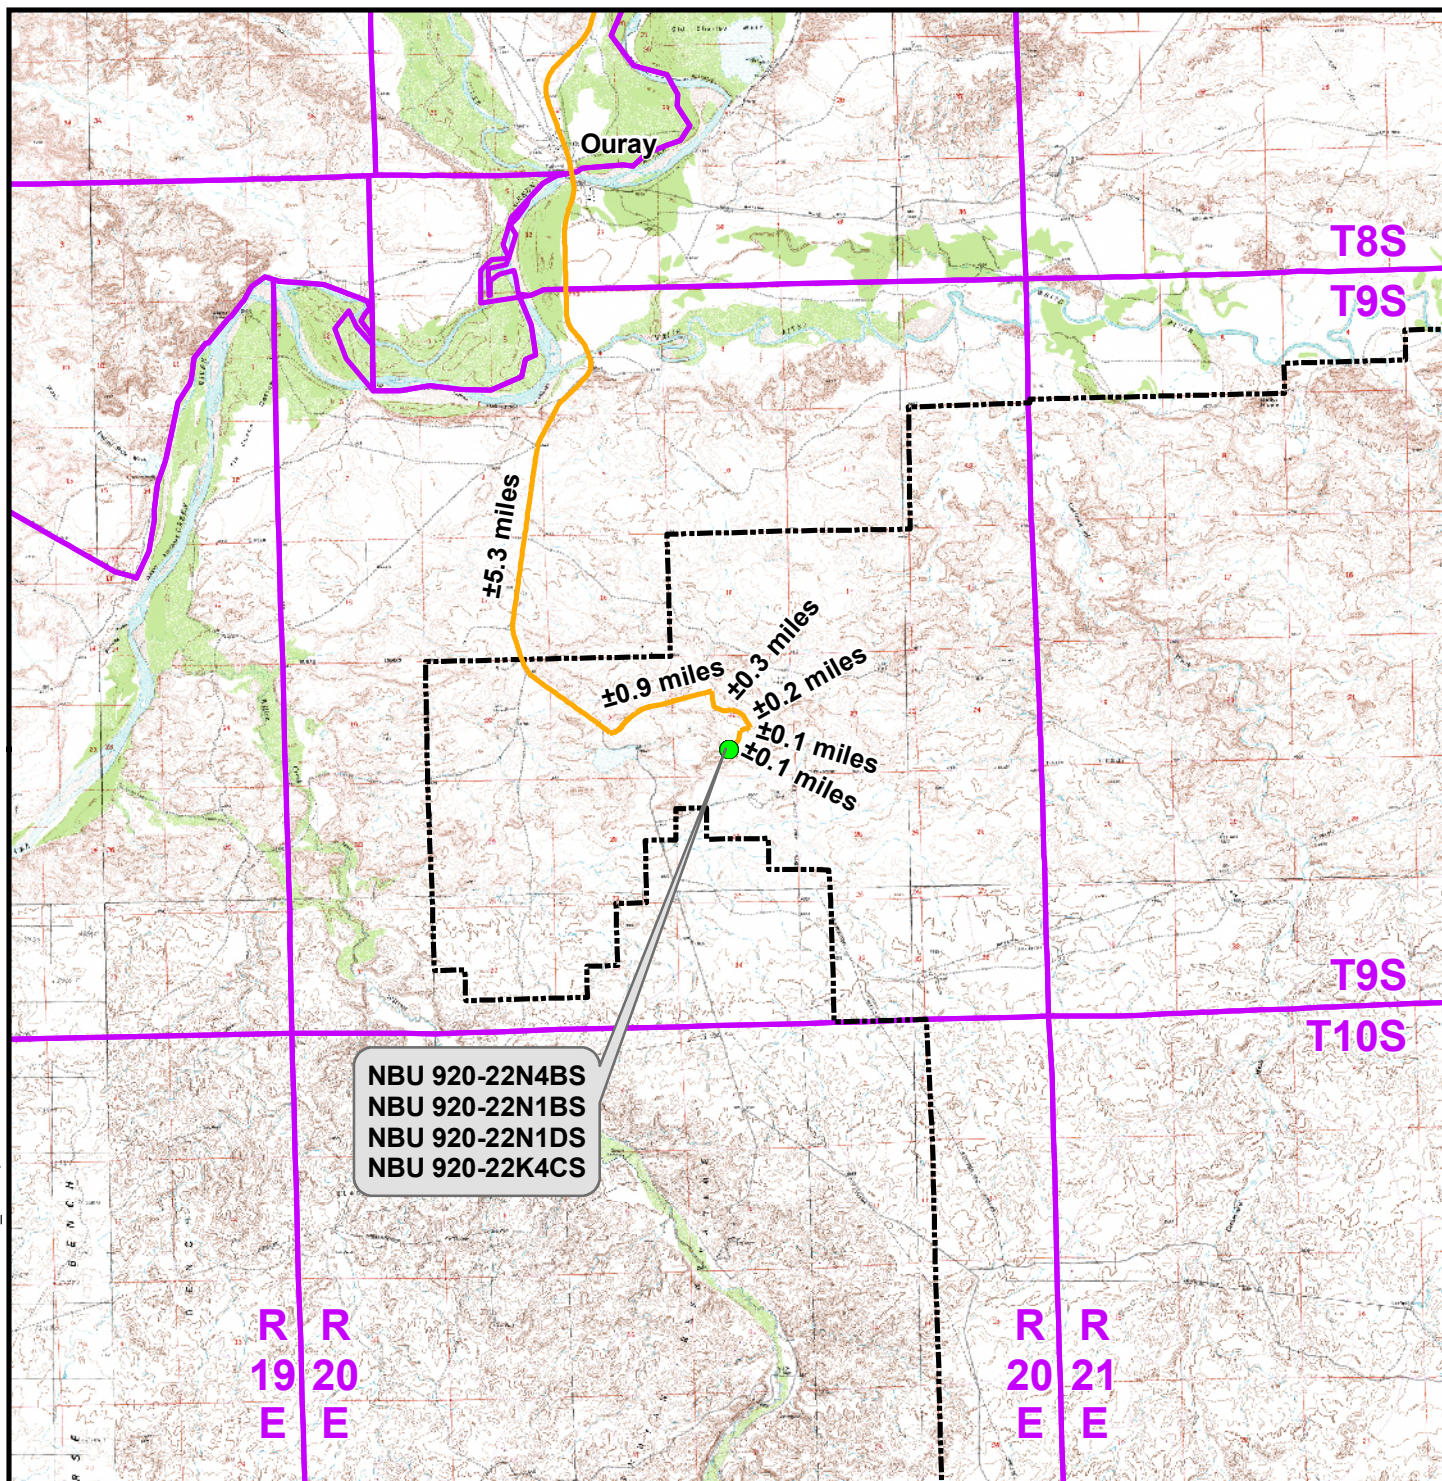**Legend**

- Proposed Well Location Natural Buttes Unit Boundary
— Access Route - Proposed

Distance From Well Pad - NBU 920-22N To Unit Boundary: $\pm 2,778\text{ft}$ **WELL PAD - NBU 920-22N**

TOPO A
 NBU 920-22N4BS, NBU 920-22N1BS,
 NBU 920-22N1DS & NBU 920-22K4CS
 LOCATED IN SECTION 22, T9S, R20E,
 S.L.B.&M., UINTAH COUNTY, UTAH

**Kerr-McGee Oil &
 Gas Onshore L.P.**

1099 18th Street
 Denver, Colorado 80202



CONSULTING, LLC
 2155 North Main Street
 Sheridan, Wyoming 82801
 Phone 307-674-0609
 Fax 307-674-0182



SCALE: 1:100,000

NAD83 USP Central

SHEET NO:

DRAWN: JELo

DATE: 6 Oct 2009

10

REVISED: TL


DATE: 14 Sept 2012

10 OF 16



- Total Proposed Road Length: ±760ft

11 OF 16

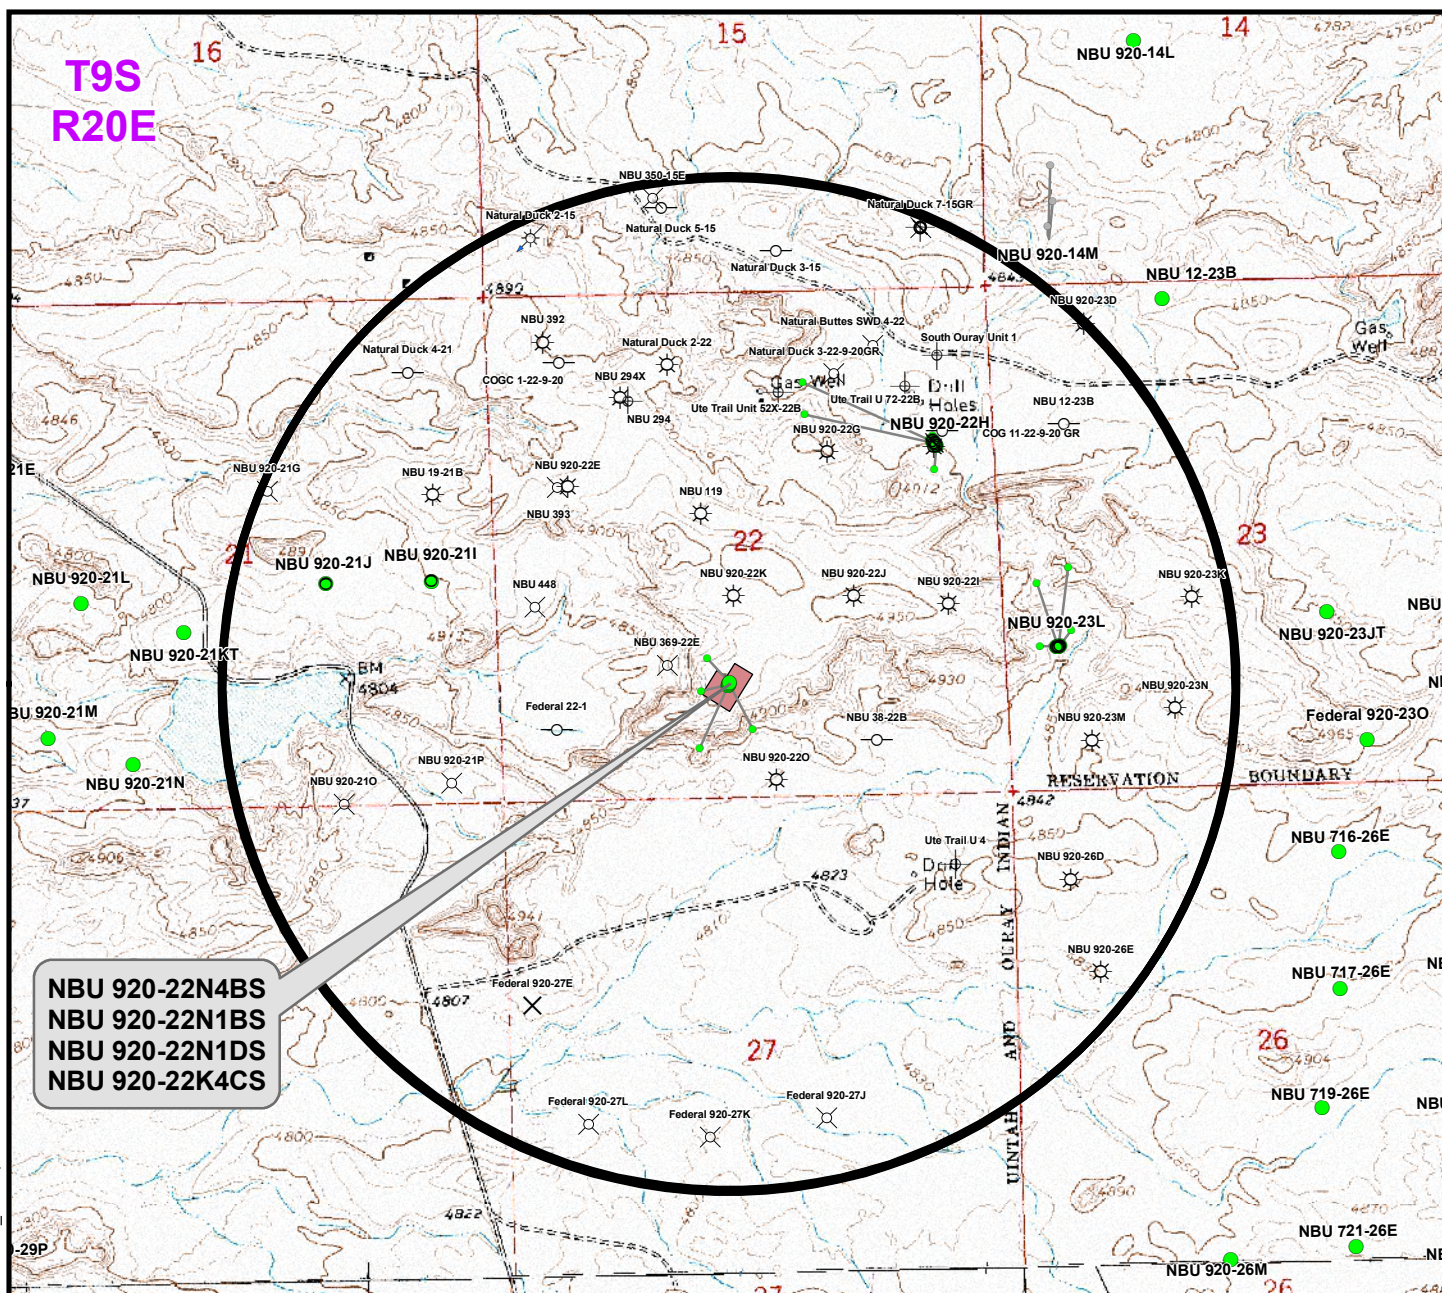

NBU 920-22N4BS
NBU 920-22N1BS
NBU 920-22N1DS
NBU 920-22K4CS

Well locations derived from Utah Division of Oil, Gas and Mining (UDOGM) (oilgas.ogm.utah.gov). The estimated distances from proposed bore locations to the nearest existing bore locations are based on UDOGM data.

Proposed Well	Nearest Well Bore	Footage
NBU 920-22N4BS	NBU 920-220	858ft
NBU 920-22N1BS	NBU 920-22K	1,047ft
NBU 920-22N1DS	NBU 920-220	585ft
NBU 920-22K4CS	NBU 920-22K	705ft

Legend

- Well - Proposed
- Bottom Hole - Proposed
- Bottom Hole - Existing
- Well Path
- Well Pad
- Well - 1 Mile Radius
- ☀ Producing
- ☺ Spudded
- APD Approved
- ⊗ Preliminary Location
- ⊕ Deferred
- ✕ Cancelled
- ⊖ Temporarily Abandoned
- ☀ Active Injector
- ⊖ Location Abandoned
- ⊖ Plugged & Abandoned
- ⊖ Shut-In

WELL PAD - NBU 920-22N

TOPO C
NBU 920-22N4BS, NBU 920-22N1BS,
NBU 920-22N1DS & NBU 920-22K4CS
LOCATED IN SECTION 22, T9S, R20E,
S.L.B.&M., UINTAH COUNTY, UTAH

**Kerr-McGee Oil &
Gas Onshore L.P.**

1099 18th Street
Denver, Colorado 80202



CONSULTING, LLC
2155 North Main Street
Sheridan, Wyoming 82801
Phone 307-674-0609
Fax 307-674-0182

SCALE: 1" = 2,000ft

DRAWN: JELo

REVISED: TL

NAD83 USP Central


DATE: 6 Oct 2009

DATE: 14 Sept 2012

SHEET NO:

12

12 OF 16

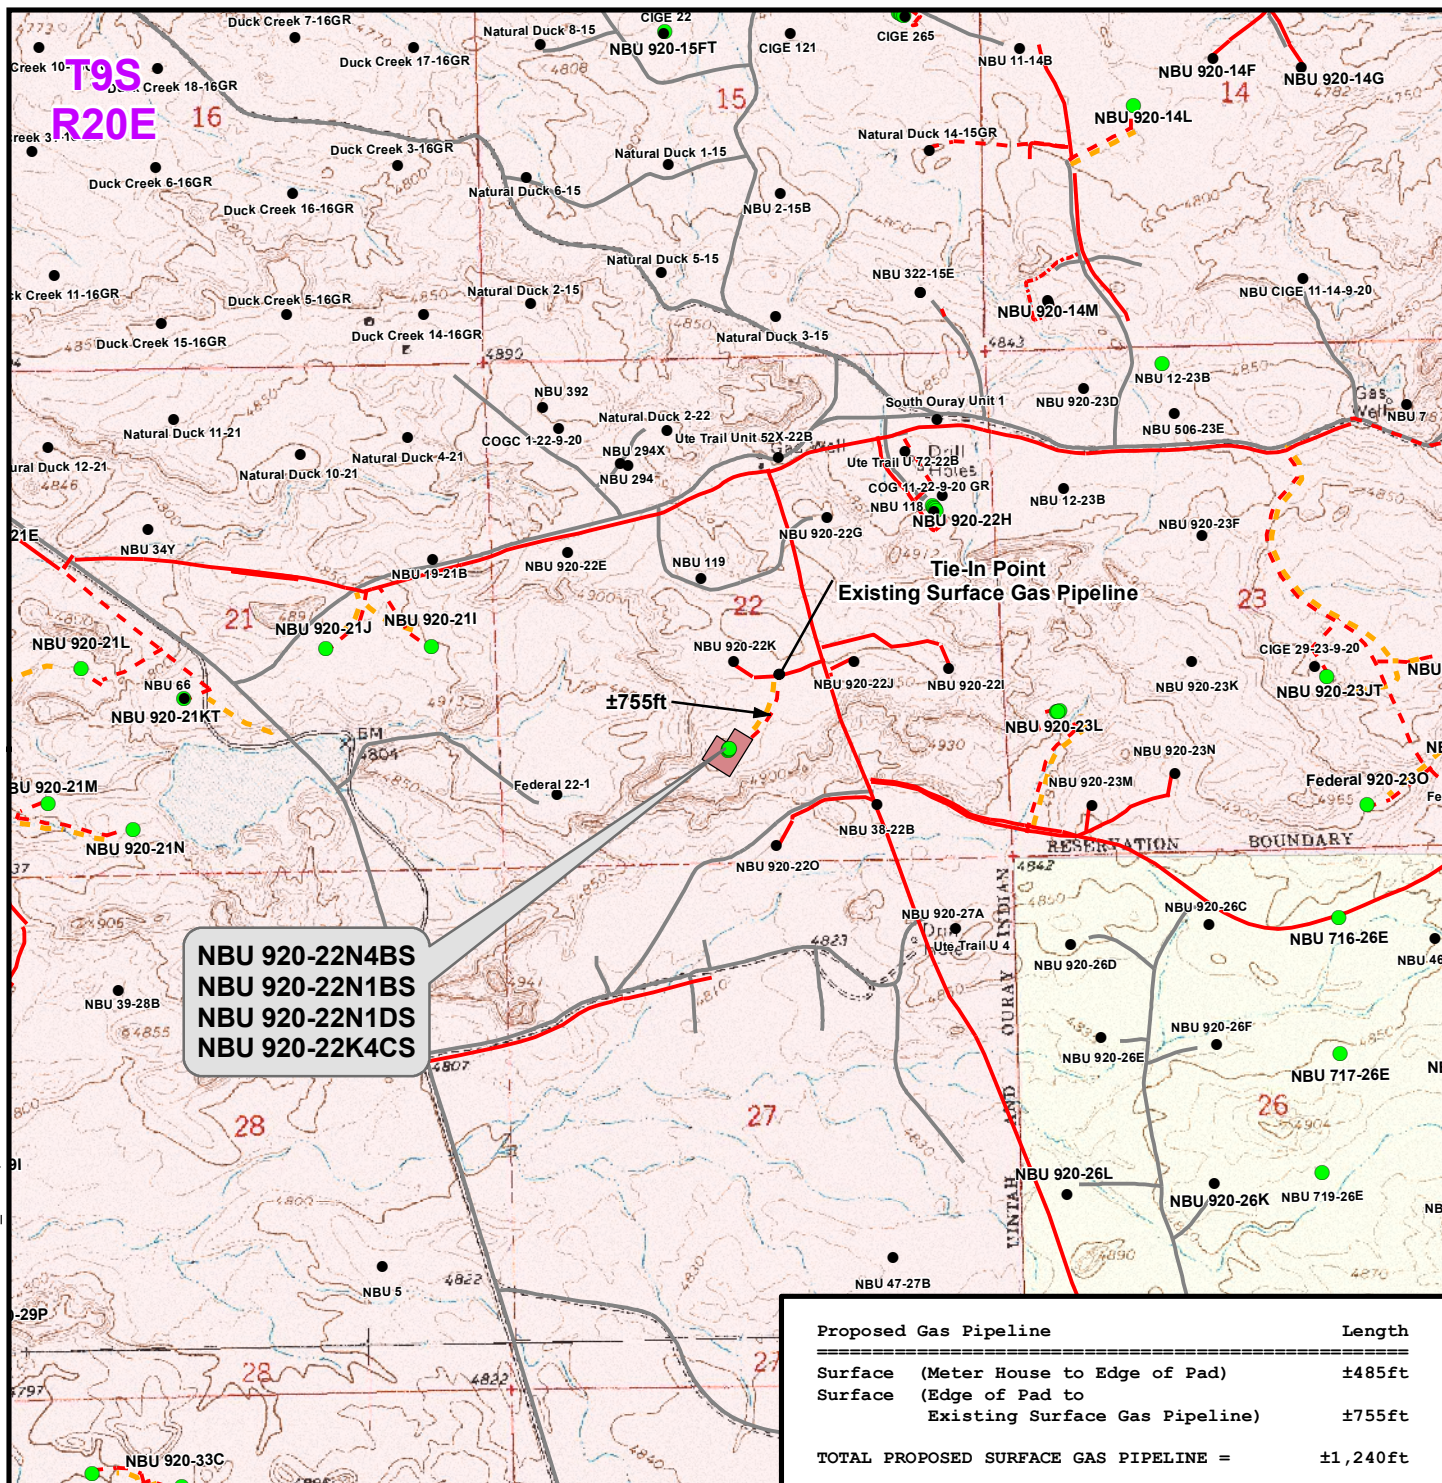

Legend

- Well - Proposed - - - Gas Pipeline - Proposed - - - Liquid Pipeline - Proposed - - - Road - Proposed Bureau of Land Management State
- Well - Existing - - - Gas Pipeline - To Be Upgraded - - - Liquid Pipeline - Existing - - - Road - Existing Indian Reservation Private
- Well Pad - - - Gas Pipeline - Existing

WELL PAD - NBU 920-22N

TOPO D
NBU 920-22N4BS, NBU 920-22N1BS,
NBU 920-22N1DS & NBU 920-22K4CS
LOCATED IN SECTION 22, T9S, R20E,
S.L.B.&M., UINTAH COUNTY, UTAH

**Kerr-McGee Oil &
 Gas Onshore L.P.**

**1099 18th Street
 Denver, Colorado 80202**



CONSULTING, LLC

2155 North Main Street
 Sheridan, Wyoming 82801
 Phone 307-674-0609
 Fax 307-674-0182

SCALE: 1" = 2,000ft

DRAWN: JELO

REVISED: TL

NAD83 USP Central


DATE: 6 Oct 2009

DATE: 14 Sept 2012

SHEET NO:

13

13 OF 16

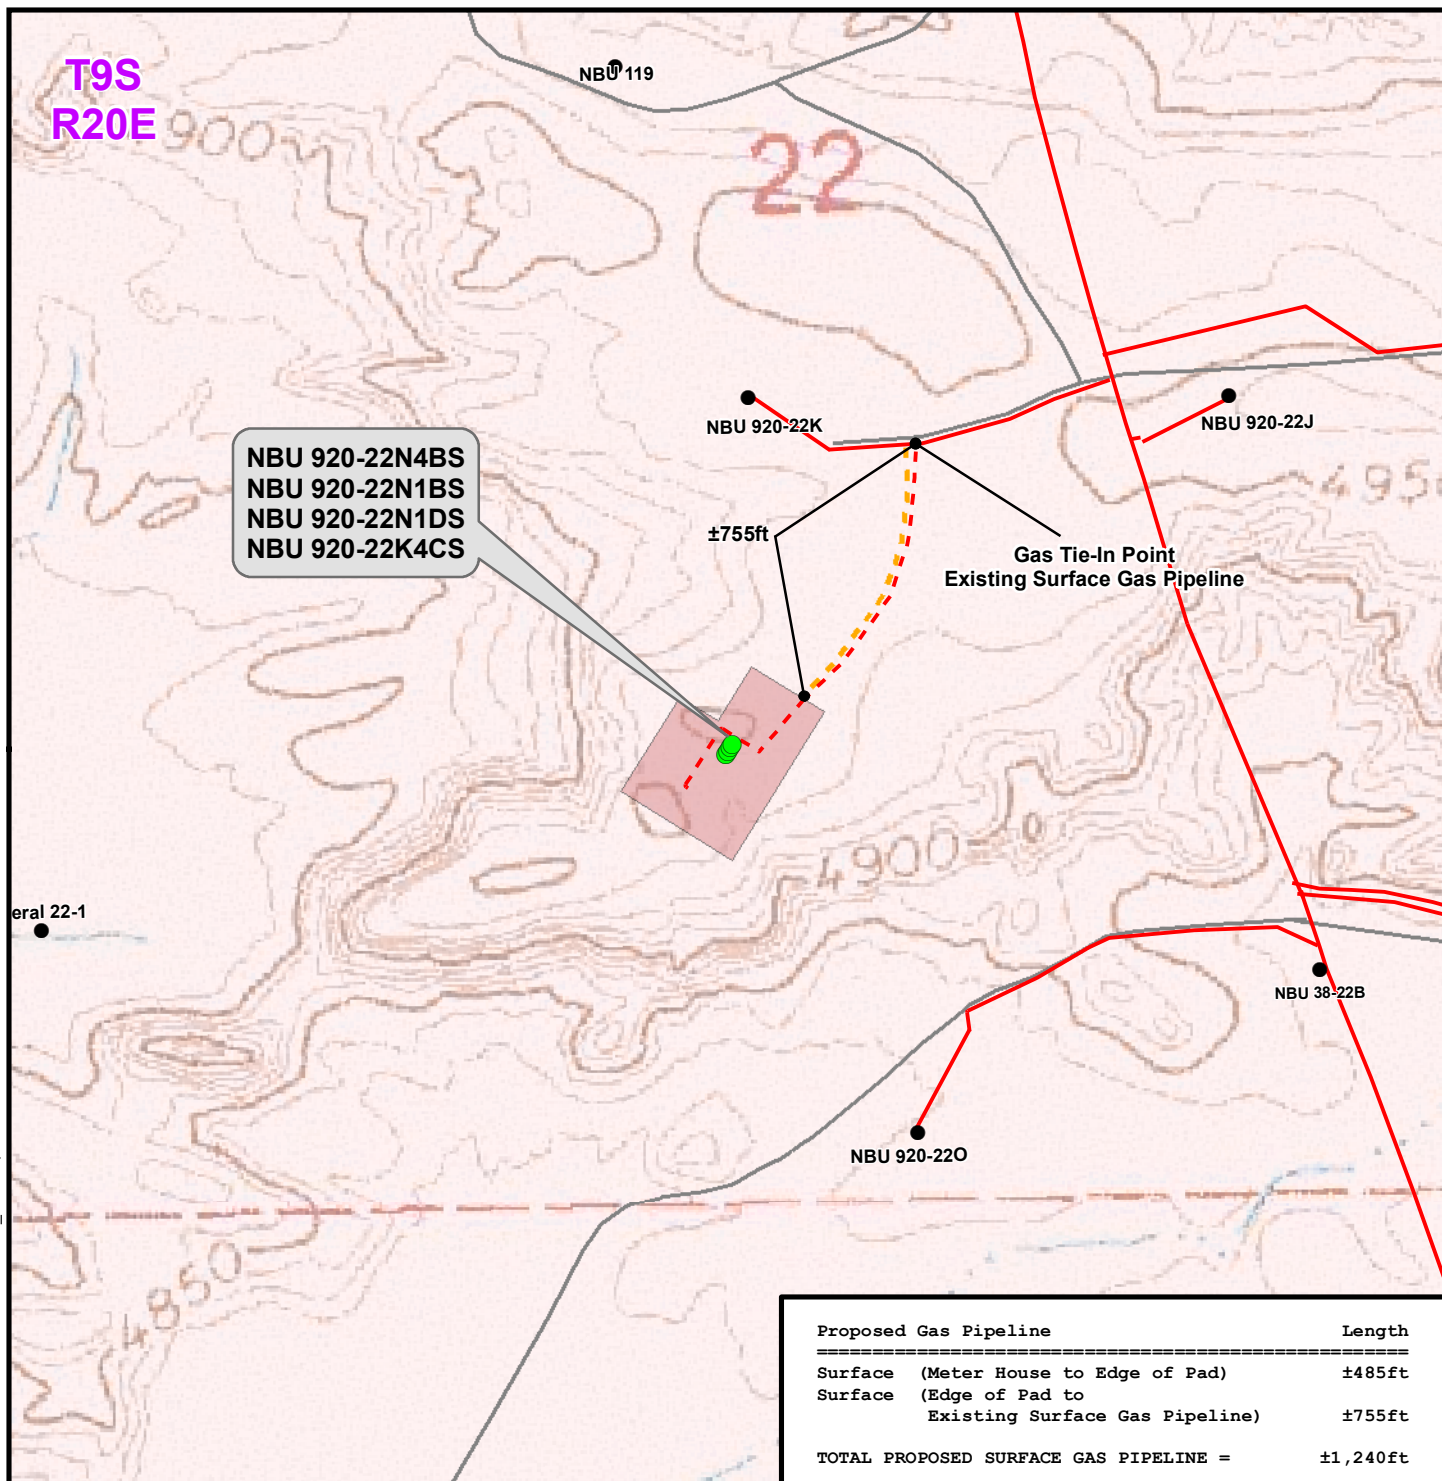**Legend**

- Well - Proposed ■ Well Pad - Proposed - - - Gas Pipeline - Proposed - - - Liquid Pipeline - Proposed - - - Road - Proposed ■ Bureau of Land Management
- Well - Existing ■ Well Pad - Existing - - - Gas Pipeline - To Be Upgraded - - - Liquid Pipeline - Existing - - - Road - Existing ■ Indian Reservation
- Gas Pipeline - Existing — State — Private

WELL PAD - NBU 920-22N

TOPO D2 (PAD & PIPELINE DETAIL)
NBU 920-22N4BS, NBU 920-22N1BS,
NBU 920-22N1DS & NBU 920-22K4CS
LOCATED IN SECTION 22, T9S, R20E,
S.L.B.&M., UINTAH COUNTY, UTAH

**Kerr-McGee Oil &
Gas Onshore L.P.**

**1099 18th Street
Denver, Colorado 80202**



CONSULTING, LLC

2155 North Main Street
 Sheridan, Wyoming 82801
 Phone 307-674-0609
 Fax 307-674-0182



SCALE: 1" = 500ft

NAD83 USP Central

SHEET NO:

DRAWN: JELO


DATE: 6 Oct 2009

14

REVISED: TL

DATE: 14 Sept 2012

14 OF 16

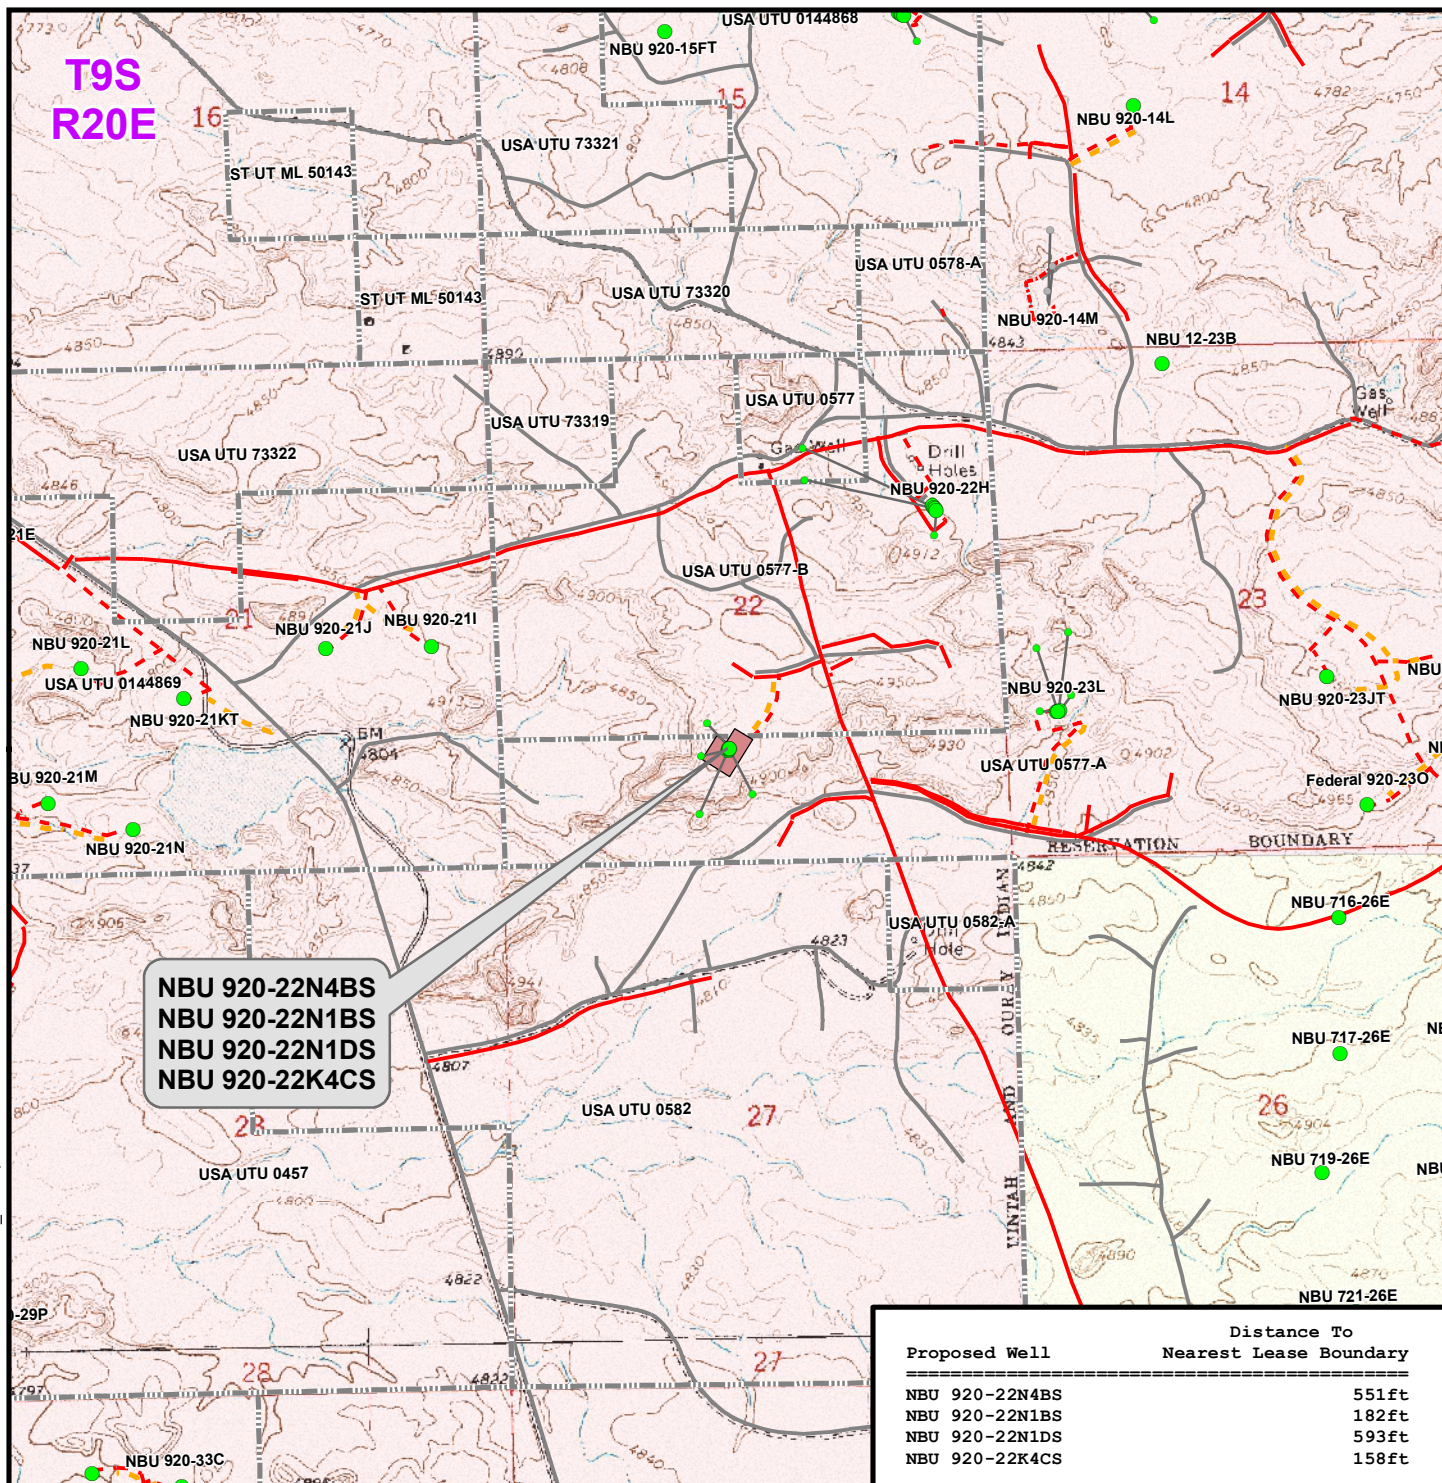

Legend

- Well - Proposed
- Bottom Hole - Proposed
- Bottom Hole - Existing
- Well Path
- Well Pad
- Lease Boundary
- Gas Pipeline - Proposed
- Gas Pipeline - To Be Upgraded
- Gas Pipeline - Existing
- Liquid Pipeline - Proposed
- Liquid Pipeline - Existing
- Road - Proposed
- Road - Existing
- Bureau of Land Management
- Indian Reservation
- State
- Private

WELL PAD - NBU 920-22N

TOPO E
NBU 920-22N4BS, NBU 920-22N1BS,
NBU 920-22N1DS & NBU 920-22K4CS
LOCATED IN SECTION 22, T9S, R20E,
S.L.B.&M., UINTAH COUNTY, UTAH

**Kerr-McGee Oil &
 Gas Onshore L.P.**

**1099 18th Street
 Denver, Colorado 80202**



CONSULTING, LLC

2155 North Main Street
 Sheridan, Wyoming 82801
 Phone 307-674-0609
 Fax 307-674-0182

SCALE: 1" = 2,000ft

DRAWN: JELO

REVISED: TL

NAD83 USP Central

DATE: 6 Oct 2009

DATE: 14 Sept 2012

SHEET NO:


15

15 OF 16



**Kerr-McGee Oil & Gas Onshore, LP
WELL PAD - NBU 920-22N
WELLS - NBU 920-22N4BS, NBU 920-22N1BS,
NBU 920-22N1DS & NBU 920-22K4CS
Section 22, T9S, R20E, S.L.B.&M.**

Proceed in a westerly direction from Vernal, Utah along U.S. Highway 40 approximately 13.9 miles to the junction of State Highway 88. Exit left and proceed in a southerly direction along State Highway 88 approximately 16.8 miles to Ouray, Utah. From Ouray, proceed in a southerly direction along the Seep Ridge Road (County B Road 2810) approximately 5.3 miles to the intersection of a service road to the northeast. Exit left and proceed in a northeasterly direction along the service road approximately 0.9 miles to a second service road to the south. Exit right and proceed in a southerly, then easterly direction along the second service road approximately 0.3 miles to an existing road to the southeast. Exit right and proceed in a southeasterly direction along the existing road approximately 0.2 miles to an existing road to the west. Exit right and proceed in a westerly direction along the existing road approximately 0.1 miles to the proposed access road to the southwest. Follow road flags in a southwesterly direction approximately 760 feet to the proposed location.

Total distance from Vernal, Utah to the proposed well location is approximately 37.6 miles in a southerly direction.

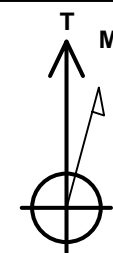

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Shape
SEGO	10687.00	-654.82	-309.17	14534344.49	2017306.98	40.014976	-109.653971	Circle (Radius: 25.00)
	- plan hits target center							
PBHL	11687.00	-654.82	-309.17	14534344.49	2017306.98	40.014976	-109.653971	Circle (Radius: 100.00)
	- plan hits target center							

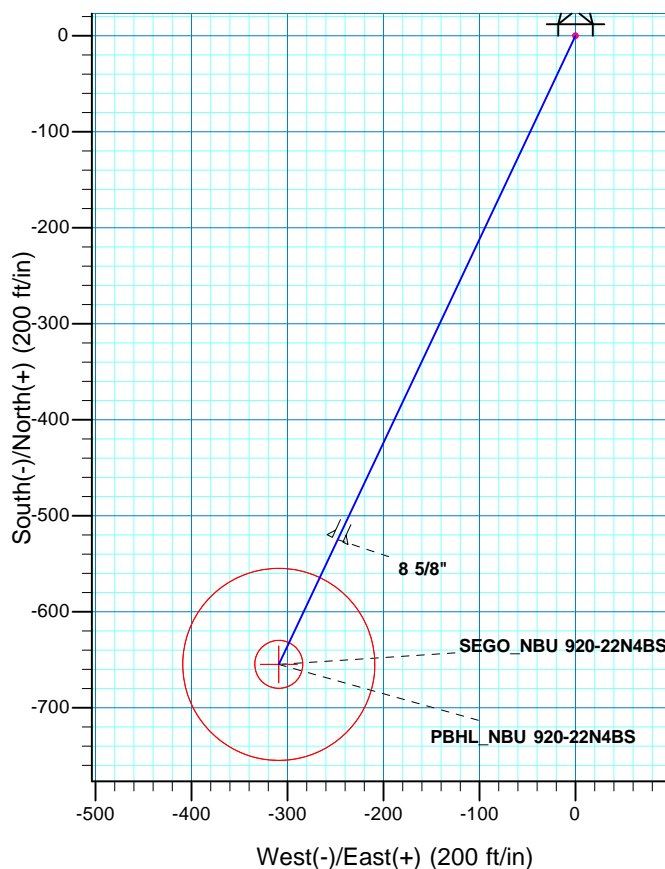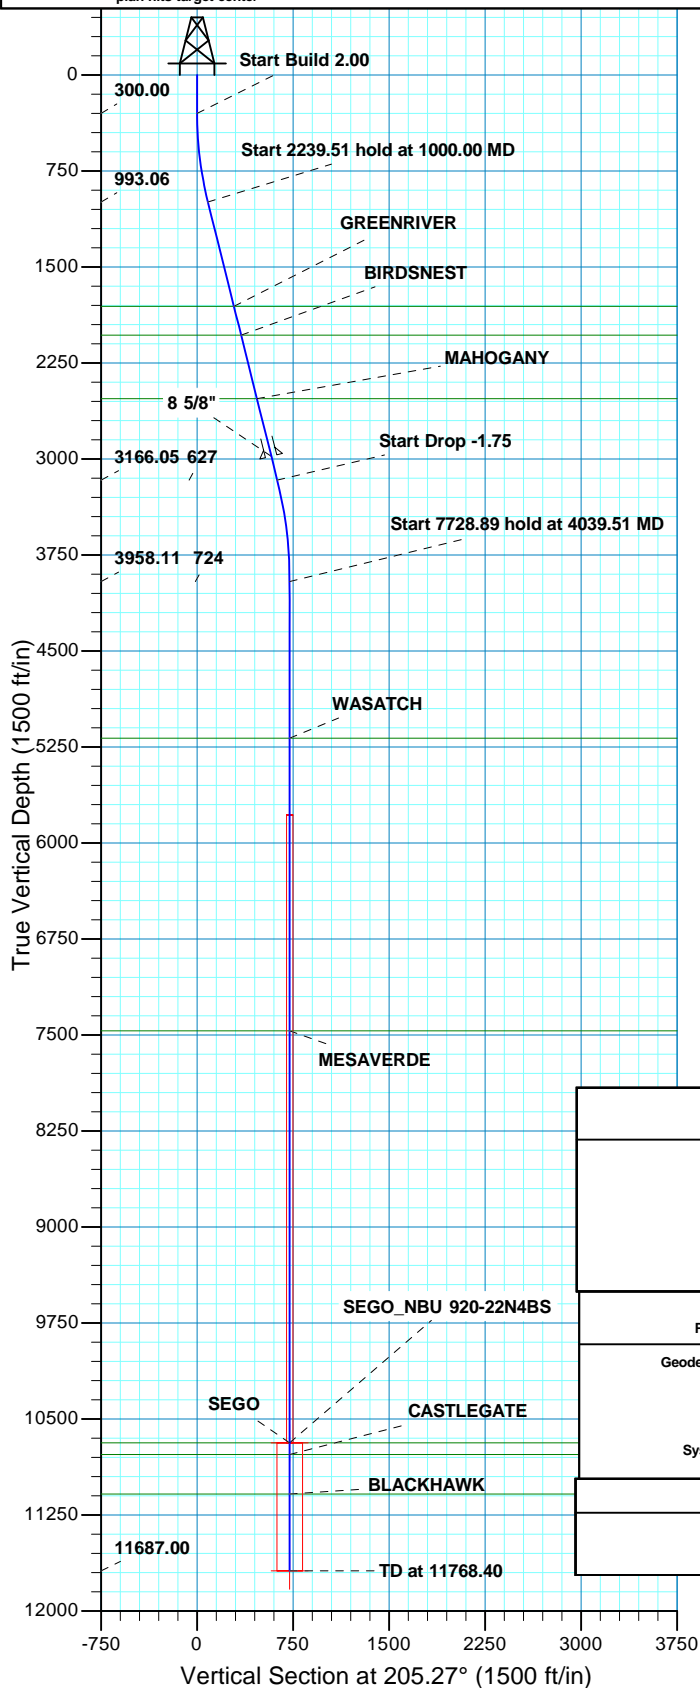

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00
1000.00	14.00	205.27	993.06	-76.95	-36.33	2.00	205.27	85.10
3239.51	14.00	205.27	3166.05	-566.88	-267.65	0.00	0.00	626.88
4039.51	0.00	0.00	3958.11	-654.82	-309.17	1.75	180.00	724.14
11768.40	0.00	0.00	11687.00	-654.82	-309.17	0.00	0.00	724.14

FORMATION TOP DETAILS

TVDPath	MDPath	Formation
1808.00	1839.89	GREENRIVER
2033.00	2071.78	BIRDSNEST
2530.00	2584.00	MAHOGANY
5182.00	5263.40	WASATCH
7467.00	7548.40	MESAVERDE
10687.00	10768.40	SEGO
10778.00	10859.40	CATSLGATE
11087.00	11168.40	BLACKHAWK

PROJECT DETAILS: UTAH - UTM (feet), NAD27, Zone 12N

Geodetic System: Universal Transverse Mercator (US Survey Feet)
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1866
Zone: Zone 12N (114 W to 108 W)
Location: SECTION 22 T9S R20E
System Datum: Mean Sea Level

CASING DETAILS

TVD	MD	Name	Size
2980.00	3047.77	8 5/8"	8.620

Plan: PLAN #1 PRELIMINARY (NBU 920-22N4BS/OH)

Created By: RobertScott Date: 13:03, September 25 2012

RECEIVED:



Scientific Drilling

US ROCKIES REGION PLANNING

UTAH - UTM (feet), NAD27, Zone 12N

NBU 920-22N Pad

NBU 920-22N4BS

OH

Plan: PLAN #1 PRELIMINARY

Standard Planning Report

25 September, 2012





Database:	EDM5000-RobertS-Local	Local Co-ordinate Reference:	Well NBU 920-22N4BS
Company:	US ROCKIES REGION PLANNING	TVD Reference:	GL 4943 & KB 4 @ 4947.00ft (ASSUMED)
Project:	UTAH - UTM (feet), NAD27, Zone 12N	MD Reference:	GL 4943 & KB 4 @ 4947.00ft (ASSUMED)
Site:	NBU 920-22N Pad	North Reference:	True
Well:	NBU 920-22N4BS	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1 PRELIMINARY		

Project	UTAH - UTM (feet), NAD27, Zone 12N		
Map System:	Universal Transverse Mercator (US Survey Feet)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	Zone 12N (114 W to 108 W)		

Site	NBU 920-22N Pad, SECTION 22 T9S R20E			
Site Position:		Northing:	14,535,003.92 usft	Latitude: 40.016774
From:	Lat/Long	Easting:	2,017,606.21 usft	Longitude: -109.652867
Position Uncertainty:	0.00 ft	Slot Radius:	13.200 in	Grid Convergence: 0.87 °

Well	NBU 920-22N4BS, 1200 FSL 2401 FWL			
Well Position	+N/-S	0.00 ft	Northing:	14,535,003.92 usft
	+E/-W	0.00 ft	Easting:	2,017,606.21 usft
Position Uncertainty		0.00 ft	Wellhead Elevation:	Ground Level: 4,943.00 ft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	03/08/10	11.30	65.88	52,443

Design	PLAN #1 PRELIMINARY			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	205.27

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,000.00	14.00	205.27	993.06	-76.95	-36.33	2.00	2.00	0.00	205.27	
3,239.51	14.00	205.27	3,166.05	-566.88	-267.65	0.00	0.00	0.00	0.00	
4,039.51	0.00	0.00	3,958.11	-654.82	-309.17	1.75	-1.75	0.00	180.00	
11,768.41	0.00	0.00	11,687.00	-654.82	-309.17	0.00	0.00	0.00	0.00	PBHL_NBU 920-22N4



Database:	EDM5000-RobertS-Local	Local Co-ordinate Reference:	Well NBU 920-22N4BS
Company:	US ROCKIES REGION PLANNING	TVD Reference:	GL 4943 & KB 4 @ 4947.00ft (ASSUMED)
Project:	UTAH - UTM (feet), NAD27, Zone 12N	MD Reference:	GL 4943 & KB 4 @ 4947.00ft (ASSUMED)
Site:	NBU 920-22N Pad	North Reference:	True
Well:	NBU 920-22N4BS	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1 PRELIMINARY		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Build 2.00									
400.00	2.00	205.27	399.98	-1.58	-0.75	1.75	2.00	2.00	0.00
500.00	4.00	205.27	499.84	-6.31	-2.98	6.98	2.00	2.00	0.00
600.00	6.00	205.27	599.45	-14.19	-6.70	15.69	2.00	2.00	0.00
700.00	8.00	205.27	698.70	-25.21	-11.90	27.88	2.00	2.00	0.00
800.00	10.00	205.27	797.47	-39.36	-18.58	43.52	2.00	2.00	0.00
900.00	12.00	205.27	895.62	-56.61	-26.73	62.60	2.00	2.00	0.00
1,000.00	14.00	205.27	993.06	-76.95	-36.33	85.10	2.00	2.00	0.00
Start 2239.51 hold at 1000.00 MD									
1,100.00	14.00	205.27	1,090.08	-98.83	-46.66	109.29	0.00	0.00	0.00
1,200.00	14.00	205.27	1,187.11	-120.70	-56.99	133.48	0.00	0.00	0.00
1,300.00	14.00	205.27	1,284.14	-142.58	-67.32	157.67	0.00	0.00	0.00
1,400.00	14.00	205.27	1,381.17	-164.46	-77.65	181.87	0.00	0.00	0.00
1,500.00	14.00	205.27	1,478.20	-186.33	-87.98	206.06	0.00	0.00	0.00
1,600.00	14.00	205.27	1,575.23	-208.21	-98.30	230.25	0.00	0.00	0.00
1,700.00	14.00	205.27	1,672.26	-230.09	-108.63	254.44	0.00	0.00	0.00
1,800.00	14.00	205.27	1,769.29	-251.96	-118.96	278.63	0.00	0.00	0.00
1,839.89	14.00	205.27	1,808.00	-260.69	-123.08	288.29	0.00	0.00	0.00
GREENRIVER									
1,900.00	14.00	205.27	1,866.32	-273.84	-129.29	302.83	0.00	0.00	0.00
2,000.00	14.00	205.27	1,963.35	-295.72	-139.62	327.02	0.00	0.00	0.00
2,071.78	14.00	205.27	2,033.00	-311.42	-147.03	344.38	0.00	0.00	0.00
BIRDSNEST									
2,100.00	14.00	205.27	2,060.38	-317.59	-149.95	351.21	0.00	0.00	0.00
2,200.00	14.00	205.27	2,157.41	-339.47	-160.28	375.40	0.00	0.00	0.00
2,300.00	14.00	205.27	2,254.44	-361.34	-170.61	399.59	0.00	0.00	0.00
2,400.00	14.00	205.27	2,351.47	-383.22	-180.93	423.79	0.00	0.00	0.00
2,500.00	14.00	205.27	2,448.50	-405.10	-191.26	447.98	0.00	0.00	0.00
2,584.00	14.00	205.27	2,530.00	-423.47	-199.94	468.30	0.00	0.00	0.00
MAHOGANY									
2,600.00	14.00	205.27	2,545.53	-426.97	-201.59	472.17	0.00	0.00	0.00
2,700.00	14.00	205.27	2,642.56	-448.85	-211.92	496.36	0.00	0.00	0.00
2,800.00	14.00	205.27	2,739.59	-470.73	-222.25	520.56	0.00	0.00	0.00
2,900.00	14.00	205.27	2,836.62	-492.60	-232.58	544.75	0.00	0.00	0.00
3,000.00	14.00	205.27	2,933.65	-514.48	-242.91	568.94	0.00	0.00	0.00
3,047.77	14.00	205.27	2,980.00	-524.93	-247.84	580.50	0.00	0.00	0.00
8 5/8"									
3,100.00	14.00	205.27	3,030.68	-536.36	-253.24	593.13	0.00	0.00	0.00
3,200.00	14.00	205.27	3,127.71	-558.23	-263.57	617.32	0.00	0.00	0.00
3,239.51	14.00	205.27	3,166.05	-566.88	-267.65	626.88	0.00	0.00	0.00
Start Drop -1.75									
3,300.00	12.94	205.27	3,224.87	-579.62	-273.66	640.97	1.75	-1.75	0.00
3,400.00	11.19	205.27	3,322.65	-598.52	-282.59	661.88	1.75	-1.75	0.00
3,500.00	9.44	205.27	3,421.03	-614.71	-290.23	679.79	1.75	-1.75	0.00
3,600.00	7.69	205.27	3,519.91	-628.18	-296.59	694.68	1.75	-1.75	0.00
3,700.00	5.94	205.27	3,619.20	-638.92	-301.66	706.55	1.75	-1.75	0.00
3,800.00	4.19	205.27	3,718.81	-646.90	-305.43	715.38	1.75	-1.75	0.00
3,900.00	2.44	205.27	3,818.64	-652.13	-307.90	721.17	1.75	-1.75	0.00
4,000.00	0.69	205.27	3,918.60	-654.60	-309.07	723.90	1.75	-1.75	0.00



Database:	EDM5000-RobertS-Local	Local Co-ordinate Reference:	Well NBU 920-22N4BS
Company:	US ROCKIES REGION PLANNING	TVD Reference:	GL 4943 & KB 4 @ 4947.00ft (ASSUMED)
Project:	UTAH - UTM (feet), NAD27, Zone 12N	MD Reference:	GL 4943 & KB 4 @ 4947.00ft (ASSUMED)
Site:	NBU 920-22N Pad	North Reference:	True
Well:	NBU 920-22N4BS	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1 PRELIMINARY		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
4,039.51	0.00	0.00	3,958.11	-654.82	-309.17	724.14	1.75	-1.75	0.00
Start 7728.89 hold at 4039.51 MD									
4,100.00	0.00	0.00	4,018.60	-654.82	-309.17	724.14	0.00	0.00	0.00
4,200.00	0.00	0.00	4,118.60	-654.82	-309.17	724.14	0.00	0.00	0.00
4,300.00	0.00	0.00	4,218.60	-654.82	-309.17	724.14	0.00	0.00	0.00
4,400.00	0.00	0.00	4,318.60	-654.82	-309.17	724.14	0.00	0.00	0.00
4,500.00	0.00	0.00	4,418.60	-654.82	-309.17	724.14	0.00	0.00	0.00
4,600.00	0.00	0.00	4,518.60	-654.82	-309.17	724.14	0.00	0.00	0.00
4,700.00	0.00	0.00	4,618.60	-654.82	-309.17	724.14	0.00	0.00	0.00
4,800.00	0.00	0.00	4,718.60	-654.82	-309.17	724.14	0.00	0.00	0.00
4,900.00	0.00	0.00	4,818.60	-654.82	-309.17	724.14	0.00	0.00	0.00
5,000.00	0.00	0.00	4,918.60	-654.82	-309.17	724.14	0.00	0.00	0.00
5,100.00	0.00	0.00	5,018.60	-654.82	-309.17	724.14	0.00	0.00	0.00
5,200.00	0.00	0.00	5,118.60	-654.82	-309.17	724.14	0.00	0.00	0.00
5,263.41	0.00	0.00	5,182.00	-654.82	-309.17	724.14	0.00	0.00	0.00
WASATCH									
5,300.00	0.00	0.00	5,218.60	-654.82	-309.17	724.14	0.00	0.00	0.00
5,400.00	0.00	0.00	5,318.60	-654.82	-309.17	724.14	0.00	0.00	0.00
5,500.00	0.00	0.00	5,418.60	-654.82	-309.17	724.14	0.00	0.00	0.00
5,600.00	0.00	0.00	5,518.60	-654.82	-309.17	724.14	0.00	0.00	0.00
5,700.00	0.00	0.00	5,618.60	-654.82	-309.17	724.14	0.00	0.00	0.00
5,800.00	0.00	0.00	5,718.60	-654.82	-309.17	724.14	0.00	0.00	0.00
5,900.00	0.00	0.00	5,818.60	-654.82	-309.17	724.14	0.00	0.00	0.00
6,000.00	0.00	0.00	5,918.60	-654.82	-309.17	724.14	0.00	0.00	0.00
6,100.00	0.00	0.00	6,018.60	-654.82	-309.17	724.14	0.00	0.00	0.00
6,200.00	0.00	0.00	6,118.60	-654.82	-309.17	724.14	0.00	0.00	0.00
6,300.00	0.00	0.00	6,218.60	-654.82	-309.17	724.14	0.00	0.00	0.00
6,400.00	0.00	0.00	6,318.60	-654.82	-309.17	724.14	0.00	0.00	0.00
6,500.00	0.00	0.00	6,418.60	-654.82	-309.17	724.14	0.00	0.00	0.00
6,600.00	0.00	0.00	6,518.60	-654.82	-309.17	724.14	0.00	0.00	0.00
6,700.00	0.00	0.00	6,618.60	-654.82	-309.17	724.14	0.00	0.00	0.00
6,800.00	0.00	0.00	6,718.60	-654.82	-309.17	724.14	0.00	0.00	0.00
6,900.00	0.00	0.00	6,818.60	-654.82	-309.17	724.14	0.00	0.00	0.00
7,000.00	0.00	0.00	6,918.60	-654.82	-309.17	724.14	0.00	0.00	0.00
7,100.00	0.00	0.00	7,018.60	-654.82	-309.17	724.14	0.00	0.00	0.00
7,200.00	0.00	0.00	7,118.60	-654.82	-309.17	724.14	0.00	0.00	0.00
7,300.00	0.00	0.00	7,218.60	-654.82	-309.17	724.14	0.00	0.00	0.00
7,400.00	0.00	0.00	7,318.60	-654.82	-309.17	724.14	0.00	0.00	0.00
7,500.00	0.00	0.00	7,418.60	-654.82	-309.17	724.14	0.00	0.00	0.00
7,548.41	0.00	0.00	7,467.00	-654.82	-309.17	724.14	0.00	0.00	0.00
MESAVERDE									
7,600.00	0.00	0.00	7,518.60	-654.82	-309.17	724.14	0.00	0.00	0.00
7,700.00	0.00	0.00	7,618.60	-654.82	-309.17	724.14	0.00	0.00	0.00
7,800.00	0.00	0.00	7,718.60	-654.82	-309.17	724.14	0.00	0.00	0.00
7,900.00	0.00	0.00	7,818.60	-654.82	-309.17	724.14	0.00	0.00	0.00
8,000.00	0.00	0.00	7,918.60	-654.82	-309.17	724.14	0.00	0.00	0.00
8,100.00	0.00	0.00	8,018.60	-654.82	-309.17	724.14	0.00	0.00	0.00
8,200.00	0.00	0.00	8,118.60	-654.82	-309.17	724.14	0.00	0.00	0.00
8,300.00	0.00	0.00	8,218.60	-654.82	-309.17	724.14	0.00	0.00	0.00
8,400.00	0.00	0.00	8,318.60	-654.82	-309.17	724.14	0.00	0.00	0.00
8,500.00	0.00	0.00	8,418.60	-654.82	-309.17	724.14	0.00	0.00	0.00
8,600.00	0.00	0.00	8,518.60	-654.82	-309.17	724.14	0.00	0.00	0.00
8,700.00	0.00	0.00	8,618.60	-654.82	-309.17	724.14	0.00	0.00	0.00



Database:	EDM5000-RobertS-Local	Local Co-ordinate Reference:	Well NBU 920-22N4BS
Company:	US ROCKIES REGION PLANNING	TVD Reference:	GL 4943 & KB 4 @ 4947.00ft (ASSUMED)
Project:	UTAH - UTM (feet), NAD27, Zone 12N	MD Reference:	GL 4943 & KB 4 @ 4947.00ft (ASSUMED)
Site:	NBU 920-22N Pad	North Reference:	True
Well:	NBU 920-22N4BS	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1 PRELIMINARY		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
8,800.00	0.00	0.00	8,718.60	-654.82	-309.17	724.14	0.00	0.00	0.00
8,900.00	0.00	0.00	8,818.60	-654.82	-309.17	724.14	0.00	0.00	0.00
9,000.00	0.00	0.00	8,918.60	-654.82	-309.17	724.14	0.00	0.00	0.00
9,100.00	0.00	0.00	9,018.60	-654.82	-309.17	724.14	0.00	0.00	0.00
9,200.00	0.00	0.00	9,118.60	-654.82	-309.17	724.14	0.00	0.00	0.00
9,300.00	0.00	0.00	9,218.60	-654.82	-309.17	724.14	0.00	0.00	0.00
9,400.00	0.00	0.00	9,318.60	-654.82	-309.17	724.14	0.00	0.00	0.00
9,500.00	0.00	0.00	9,418.60	-654.82	-309.17	724.14	0.00	0.00	0.00
9,600.00	0.00	0.00	9,518.60	-654.82	-309.17	724.14	0.00	0.00	0.00
9,700.00	0.00	0.00	9,618.60	-654.82	-309.17	724.14	0.00	0.00	0.00
9,800.00	0.00	0.00	9,718.60	-654.82	-309.17	724.14	0.00	0.00	0.00
9,900.00	0.00	0.00	9,818.60	-654.82	-309.17	724.14	0.00	0.00	0.00
10,000.00	0.00	0.00	9,918.60	-654.82	-309.17	724.14	0.00	0.00	0.00
10,100.00	0.00	0.00	10,018.60	-654.82	-309.17	724.14	0.00	0.00	0.00
10,200.00	0.00	0.00	10,118.60	-654.82	-309.17	724.14	0.00	0.00	0.00
10,300.00	0.00	0.00	10,218.60	-654.82	-309.17	724.14	0.00	0.00	0.00
10,400.00	0.00	0.00	10,318.60	-654.82	-309.17	724.14	0.00	0.00	0.00
10,500.00	0.00	0.00	10,418.60	-654.82	-309.17	724.14	0.00	0.00	0.00
10,600.00	0.00	0.00	10,518.60	-654.82	-309.17	724.14	0.00	0.00	0.00
10,700.00	0.00	0.00	10,618.60	-654.82	-309.17	724.14	0.00	0.00	0.00
10,768.41	0.00	0.00	10,687.00	-654.82	-309.17	724.14	0.00	0.00	0.00
SEGO - SEGO_NBU 920-22N4BS									
10,800.00	0.00	0.00	10,718.60	-654.82	-309.17	724.14	0.00	0.00	0.00
10,859.41	0.00	0.00	10,778.00	-654.82	-309.17	724.14	0.00	0.00	0.00
CASTLEGATE									
10,900.00	0.00	0.00	10,818.60	-654.82	-309.17	724.14	0.00	0.00	0.00
11,000.00	0.00	0.00	10,918.60	-654.82	-309.17	724.14	0.00	0.00	0.00
11,100.00	0.00	0.00	11,018.60	-654.82	-309.17	724.14	0.00	0.00	0.00
11,168.41	0.00	0.00	11,087.00	-654.82	-309.17	724.14	0.00	0.00	0.00
BLACKHAWK									
11,200.00	0.00	0.00	11,118.60	-654.82	-309.17	724.14	0.00	0.00	0.00
11,300.00	0.00	0.00	11,218.60	-654.82	-309.17	724.14	0.00	0.00	0.00
11,400.00	0.00	0.00	11,318.60	-654.82	-309.17	724.14	0.00	0.00	0.00
11,500.00	0.00	0.00	11,418.60	-654.82	-309.17	724.14	0.00	0.00	0.00
11,600.00	0.00	0.00	11,518.60	-654.82	-309.17	724.14	0.00	0.00	0.00
11,700.00	0.00	0.00	11,618.60	-654.82	-309.17	724.14	0.00	0.00	0.00
11,768.41	0.00	0.00	11,687.00	-654.82	-309.17	724.14	0.00	0.00	0.00
TD at 11768.40 - PBHL_NBU 920-22N4BS									

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
SEGO_NBU 920-22N4B	0.00	0.00	10,687.00	-654.82	-309.17	14,534,344.50	2,017,306.98	40.014976	-109.653971
- plan hits target center									
- Circle (radius 25.00)									
PBHL_NBU 920-22N4B:	0.00	0.00	11,687.00	-654.82	-309.17	14,534,344.50	2,017,306.98	40.014976	-109.653971
- plan hits target center									
- Circle (radius 100.00)									



Database:	EDM5000-RobertS-Local	Local Co-ordinate Reference:	Well NBU 920-22N4BS
Company:	US ROCKIES REGION PLANNING	TVD Reference:	GL 4943 & KB 4 @ 4947.00ft (ASSUMED)
Project:	UTAH - UTM (feet), NAD27, Zone 12N	MD Reference:	GL 4943 & KB 4 @ 4947.00ft (ASSUMED)
Site:	NBU 920-22N Pad	North Reference:	True
Well:	NBU 920-22N4BS	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	PLAN #1 PRELIMINARY		

Casing Points					
Measured Depth (ft)	Vertical Depth (ft)	Name	Casing Diameter (in)	Hole Diameter (in)	
3,047.77	2,980.00	8 5/8"	8.620	11.000	

Formations					
Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)
1,839.89	1,808.00	GREENRIVER			
2,071.78	2,033.00	BIRDSNEST			
2,584.00	2,530.00	MAHOGANY			
5,263.41	5,182.00	WASATCH			
7,548.41	7,467.00	MESAVERDE			
10,768.41	10,687.00	SEGO			
10,859.41	10,778.00	CASTLEGATE			
11,168.41	11,087.00	BLACKHAWK			

Plan Annotations					
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates			
		+N/-S (ft)	+E/-W (ft)	Comment	
300.00	300.00	0.00	0.00	Start Build 2.00	
1,000.00	993.06	-76.95	-36.33	Start 2239.51 hold at 1000.00 MD	
3,239.51	3,166.05	-566.88	-267.65	Start Drop -1.75	
4,039.51	3,958.11	-654.82	-309.17	Start 7728.89 hold at 4039.51 MD	
11,768.41	11,687.00	-654.82	-309.17	TD at 11768.40	

Kerr-McGee Oil & Gas Onshore. L.P.**NBU 920-22N Pad****API #4304750560****NBU 920-22N1DS**

Surface:	1217 FSL / 2412 FWL	SESW	Lot
BHL:	738 FSL / 2635 FWL	SESW	Lot

API #**NBU 920-22K4CS**

Surface:	1225 FSL / 2418 FWL	SESW	Lot
BHL:	1491 FSL / 2192 FWL	NESW	Lot

API #**NBU 920-22N1BS**

Surface:	1209 FSL / 2406 FWL	SESW	Lot
BHL:	1151 FSL / 2119 FWL	SESW	Lot

API #**NBU 920-22N4BS**

Surface:	1200 FSL / 2401 FWL	SESW	Lot
BHL:	551 FSL / 2078 FWL	SESW	Lot

The NBU 920-22N APD was approved by the BLM on October 16, 2009. A sundry notice was approved on December 16, 2011 to change the original permit to a directional well and to update the well name to the NBU 920-22N1DS. Kerr-McGee plans to add three additional wells to NBU 920-22N Pad. The surface disturbance will remain the same as planned in the originally approved APD.

This Surface Use Plan of Operations (SUPO) or 13-point plan provides site-specific information for the above-referenced wells.

In accordance with Utah Oil & Gas Conservation Rule R649-3-11 pertaining to Directional Drilling, these wells will be directionally drilled. Refer to Topo Map A for directions to the location and Topo Maps A and B for location of access roads within a 2-mile radius.

An on-site meeting for the NBU 920-22N Pad was held on June 24, 2009.

A. Existing Roads:

Existing roads consist of county and improved/unimproved access roads (two-tracks). In accordance with Onshore Order #1, Kerr-McGee will, in accordance with BMPs, improve or maintain existing roads in a condition

that is the same as or better than before operations began. New or reconstructed proposed access roads are discussed in Section B.

The existing roads will be maintained in a safe and usable condition. Maintenance for existing roads will continue until final abandonment and reclamation of well pads and/or other facilities, as applicable. Road maintenance will include, but is not limited to, blading, ditching, and/or culvert installation and cleanout. To ensure safe operating conditions, gravel surfacing will be performed where excessive rutting or erosion may occur. Dust control will be performed as necessary to ensure safe operating conditions.

Roads, gathering lines and electrical distribution lines will occupy common disturbance corridors where possible. Where available, roadways will be used as the staging area and working space for installation of gathering lines. All disturbances located in the same corridor will overlap each other to the maximum extent possible, while maintaining safe and sound construction and installation practices. Unless otherwise approved or requested in site specific documents, in no case will the maximum disturbance widths of the access road and utility corridors exceed the widths specified in Part D of this document.

Please refer to Topo B, for existing roads.

B. New or Reconstructed Access Roads:

All new or reconstructed roads will be located, designed, and maintained to meet the standards of the BIA.

Each new well pad or pad expansion may require construction of a new access road and/or de-commissioning of an older road. Plans, routes, and distances for new roads and road improvements are provided in design packages, exhibits and maps for a project. Project-specific maps are submitted to depict the locations of existing, proposed, and/or decommissioned and include the locations for supporting structures, including, but not limited to, culverts, bridges, low water crossings, range infrastructure, and haul routes, as per OSO 1. Designs for cuts and fills, including spoils source and storage areas, are provided with the road designs, as necessary.

Where safety objectives can be met. As applicable, Kerr-McGee may use unimproved and/or two-track roads for lease operations, to lessen total disturbance.

Road designs will be based on the road safety requirements, traffic characteristics, environmental conditions, and the vehicles the road is intended to carry. Generally, newly constructed unpaved lease roads will be crowned and ditched with the running surfaces of the roads approximately 12-18 feet wide and a total road corridor width not to exceed 45 feet, except where noted in the road design for a specific project. Maximum grade will generally not exceed 8%. Borrow ditches will be back sloped 3:1 or less. Construction BMPs will be employed to control onsite and offsite erosion.

Where topography would direct storm water runoff to an access road or well pad, drainage ditches or other common drainage control facilities, such as V- or wing-ditches, will be constructed to divert surface water runoff. Drainage features, including culverts, will be constructed or installed prior to commencing other operations, including drilling or facilities placement. Riprap will be placed at the inlet and outlet at the culvert(s), as necessary.

Prior to construction, new access road(s) will be staked according to the requirements of OSO 1. Construction activity will not be conducted using frozen or saturated materials or during periods when significant watershed damage

(e.g. rutting, extensive sheet soil erosion, formation of rills/gullies, etc.) is likely to occur. Vegetative debris will not be placed in or under fill embankments.

New road maintenance will include, but is not limited to, blading, ditching, culvert installation and cleanout, gravel surfacing where excessive rutting or erosion may occur and dust control, as necessary to ensure safe operating conditions. All vehicular traffic, personnel movement, construction/restoration operations will be confined to the approved area and to existing roadways and/or access routes.

Snow removal will be conducted on an as-needed basis to accommodate safe travel. Snow removal will occur as necessary throughout the year, as will necessary drainage ditch construction. Removed snow may be stored on permitted well pads to reduce hauling distances and/or at the aerial extent of approved disturbance boundaries to facilitate snow removal for the remainder of the season.

If a county road crossing or encroachment permit is needed, it will be obtained prior to construction.

The following segments will require a ROW to be submitted under a different cover to the Ute Indian Tribe.

±760' (0.1 miles) – Section 22 (S/2) T9S R20E – On lease UTU0577B Ute Indian Tribe surface,
New access road is proposed from the edge of the well pad to an existing road to the north.
Please refer to Topo B.

C. Location of Existing Wells:

A) Refer to Topo Map C.

D. Location of Existing and/or Proposed Facilities:

Should the well(s) prove productive, production facilities will be installed on the disturbed portion of each well pad. A berm will be constructed completely around production components (typically excluding dehy's and/or separators) that contain fluids (i.e. production tanks, produced liquids tanks). The berms will generally be constructed of compacted subsoil or corrugated metal, and will hold the capacity of the largest tank and have sufficient freeboard to accommodate a 25 year rainfall event. This includes pumping units. Aboveground structures constructed or installed onsite for 6 months or longer, will be painted a flat, non-reflective, earth-tone color chosen at the onsite (typically Shadow Gray). A production facility layout is provided as part of a project-specific APD, ROW or NOS submission.

GAS GATHERING

Please refer to Topo D2- Pad and Pipeline Detail.

The gas gathering pipeline material: Steel line pipe. Surface = Bare pipe. Buried = Coated with fusion bonded epoxy coating (or equivalent). The total gas gathering pipeline distance from the meter to the tie in point is ±1,240' and the individual segments are broken up as follows:

The following segments will require a ROW to be submitted under a different cover to the Ute Indian Tribe.

±1,240' (0.2 miles) – Section 22 T9S R20E– On-lease UTU0577A and UTU0577B Ute Indian Tribe Surface, New 6" surface gas gathering pipeline from the meter to the existing surface gas pipeline to the northeast of the proposed pad. Please refer to Topo D2 - Pad and Pipeline Detail.

Pipeline Gathering Construction

Gathering (pipeline) infrastructure will be utilized to collect and transport gas and/or fluids from the wells which are owned and operated by Kerr McGee. Gas gathering pipeline(s), gas lift, or liquids pipelines may be constructed to lie on the surface or be buried. Where the pipeline is adjacent to the road or well pad, the road and/or well pad will be utilized for construction activities and staging. The area of disturbance during construction from the edge of road or well pad will typically be 30' in width. Where pipelines run cross country, the width of disturbance will typically be 45 ft for buried lines and 30 ft for surface lines. In addition, Kerr-McGee requests for a permanent 30' disturbance width that will be maintained for the portion adjacent to the road. The need for the 30' permanent disturbance width is for maintenance and repairs. Cross country permanent disturbance width also are required to be 30ft.

Above-ground installation will generally not require clearing of vegetation or blading of the surface, except where safety considerations necessitate earthwork. In some surface pipeline installation instances pipe cannot be constructed where it will lay. In these cases where an above-ground pipeline is constructed parallel and adjacent to a road, it will be welded/fused on the road and then lifted from the road to the pipeline route. In other cases where a pipeline route is not parallel and adjacent to a road (cross-country between sites), it will be welded/fused in place at a well pad, access road, or designated work area and pulled between connection locations with a suitable piece of equipment.

Buried pipelines will generally be installed parallel and adjacent to existing and/or newly constructed roads and within the permitted disturbance corridor. Buried pipelines may vary from 2 inches (typically fuel gas lines) to 24 inches (typically transportation lines) in diameter, but 6 to 16 inches is typical for a buried gas line. The diameter of liquids pipelines may vary from 2 inches to 12 inches, but 6 inches is the typical diameter. Gas lift lines may vary from 2 to 12 inches in diameter, but 6-inch diameter pipes are generally used for gas lift. If two or more pipelines are present (gas gathering, gas lift, and fluids), they will share a common trench where possible.

Typically, to install a buried pipeline, topsoil will be removed, windrowed and placed on the non-working side of the route for later reclamation. Because working room is limited, the spoil may be spread out across the working side and construction will take place on the spoil. The working side of the corridor will be used for pipe stringing, bending, welding and equipment travel. Small areas on the working side displaying ruts or uneven ground will be groomed to facilitate the safe passage of equipment. After the pipelines are installed, spoil will be placed back into the trench, and the topsoil will be redistributed over the disturbed corridor prior to final reclamation. Typical depth of the trench will be 6 feet, but depths may vary according to site-specific conditions (presence of bedrock, etc.). The proposed trench width for the pipeline would range from 18-48 inches.

The pipeline will be welded along the proposed route and lowered into place. Trenching equipment will cut through the soil or into the bedrock and create good backfill, eliminating the need to remove large rocks. The proposed buried pipeline will be visually and radiographically inspected and the entire pipeline will be pneumatically or hydrostatically tested before being placed into service. Routine vehicle traffic will be prevented from using pipeline routes as travel ways by posting signs at the route's intersection with an access road.

If pipelines or roads encounter a drainage that could be subject to flooding or surface water during extreme precipitation events, Kerr-McGee will apply all applicable Army Corps mandates as well as the BLM's Hydraulic Considerations for Pipeline Crossings of Stream Channels (BLM Technical Note 423, April 2007). In addition, all stream and drainage crossings will be evaluated to determine the need for stream alteration permits from the State of Utah Division of Water Rights and if necessary, required permits will be secured. Similarly, where a road or pipeline crossing exists the pipe will be butt welded and buried to a depth between 24 and 48 inches or more. Dirt roads will be cut and restored to a condition equivalent to the existing condition. All Uintah County road encroachment and crossing permits, where applicable, will be obtained prior to crossing construction. In no case will pressure testing of pipelines result in discharge of liquids to the surface.

Pipeline signs will be installed along the route to indicate the pipeline proximity, ownership, and to provide emergency contact phone numbers. Above ground valves and lateral T's will be installed at various locations for production integrity and safety purposes.

When no longer deemed necessary by the operator, Kerr-McGee or it's successor will consult with the Vernal BIA Office before terminating of the use of the pipeline(s).

The Anadarko Completions Transportation System (ACTS) information:

Kerr-McGee will use either a closed loop drilling system that will require one pit and one storage area to be constructed on the drilling pad or a traditional drilling operation with one pit. The storage area will be used to contain only the de-watered drill cuttings and will be lined and reclaimed according to traditional pit closure standards. The pit will be constructed to

allow for completion operations. The completion operations pit is lined and will be used for the wells drilled on the pad or used as part of our Anadarko Completions Transportation (ACTS) system which is discussed in more detail below. Using the closed loop drilling system will allow Kerr-McGee to decrease the amount of disturbance/footprint on location compared to a single large drilling/completion pit.

If Kerr-McGee does not use a closed loop system, it will construct a drilling reserve pit to contain drill cuttings and for use in completion operations. Depending on the location of the pit, its relation to future drilling locations, the reserve/completion pit will be utilized for the completion of the wells on that pad and/or be used as part of our ACTS system.

Kerr-McGee will use ACTS to optimize the completion processes for multiple pads across the project area which may include up to a section of development. ACTS will facilitate management of frac fluids by utilizing existing reserve pits and temporary, surface-laid aluminum liquids transfer lines between frac locations. The pit will be refurbished as follows when a traditional drill pit is used: mix and pile up drill cuttings with dry dirt, bury the original liner in the pit, walk bottom of pit with cat. Kerr-McGee will reline the pit with a 30 mil liner and double felt padding. The refurbished pit will be the same size or smaller as specified in the originally approved ROW/APD. The pit refurb will be done in a normal procedure and there will be no modification to the pit.

All four sides of the completions pit will be fenced in according to standard pit fencing procedures. Netting will be installed over all pits.

The collected hydrocarbons will be treated and sold at approved sales facilities. A loading rack with drip containment will also be installed where water trucks would unload and load to prevent damage caused from pulling hoses in and out of the pit .

ACTS will require temporarily laying multiple 6" aluminum water transfer lines on the surface between either existing or refurbished reserve pits. The temporary aluminum transfer lines will be utilized to transport frac fluid being injected and/or recovered during the completion process and will be laid adjacent to existing access roads or pipeline corridors. Upon completion of the frac operation, the liquids transfer lines will be flushed with fresh water and purged with compressed air. The contents of the transfer lines will be flushed into a water truck for delivery to another ACTS location or a reserve pit.

The temporary ACTS lines will be permitted under a separate cover to the Ute Indian Tribe.

The volume of frac fluid transported through a water transfer line will vary, but volume is projected to be approximately 1.75 bbls per 50-foot joint. Although the maximum working pressure is 125 psig, the liquids transfer lines will be operated at a pressure of approximately 30 to 40 psig. Kerr-McGee requests to keep the netted pit open for one year from first production of the first produced well on the pad. During this time the surrounding well location completion fluids may be recycled in this pit and utilized for other frac jobs in the area. After one year Kerr-McGee will backfill the pit and reclaim. If the pit is not needed for an entire year it will be backfilled and reclaimed earlier. Kerr-McGee understands that due to the temporary nature of this system, BIA considers this a casual use situation; therefore, no permanent ROW or temporary use plan will need to be issued by the BIA.

NBU 920-22K4CS/920-22N1BS/ 920-22N1DS/ 920-22N4BS
Kerr-McGee Oil Gas Onshore, L.P.

Surface Use Plan of Operations
7 of 15

E. Location and Types of Water Supply:

Water for drilling and completion operations will be obtained from the following sources:

JD Field Services:

Green River: 1087' FSL & 1020' FEL, Sec. 15 – T2N – R22E

RN Industries:

High Pressure: 705' FNL & 675' FWL, Sec. 1 – T6S – R22E
1057' FNL & 390' FWL, Sec. 1 – T6S – R22E
1239' FNL & 52' FEL, Sec. 6 – T6S – R23E

White River: 501' FNL & 1676' FEL, Sec. 9 – T8S – R20E
471' FNL & 1676' FEL, Sec. 9 – T8S – R20E
900' FNL & 550' FEL, Sec. 35 – T9S – R22E
200' FNL & 950' FEL, Sec. 2 – T10S – R22E
275' FSL & 2275' FEL, Sec. 2 – T10S – R22E
122' FSL & 1350' FEL, Sec. 11 – T10S – R22E
1670' FSL & 500' FEL, Sec. 12 – T10S – R22E
959' FNL & 705' FEL, Sec. 13 – T10S – R22E
600' FSL & 900' FEL, Sec. 13 – T10S – R22E

Water Plant: 481' FNL & 2176' FEL, Sec. 9 – T8S – R20E
471' FNL & 2176' FEL, Sec. 9 – T8S – R20E

Frog Pond: 4820' FNL & 1200' FWL, Sec. 33 – T8S – R20E
4850' FNL & 700' FWL, Sec. 33 – T8S – R20E

Blue Tanks: 200' FNL & 405' FEL, Sec. 32 – T4S – R3E

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

F. Construction Materials:

Construction operations will typically be completed with native materials found on location. Construction materials that must be imported to the site (mineral material aggregate, soils or materials suitable for fill/surfacing) will be obtained from a nearby permitted source (described in site-specific documents). No construction materials will be removed from Tribal lands without prior approval from the BIA. A source location other than an on-location construction site will be designated either via a map or narrative within the project specific materials provided to the BIA.

G. Methods for Handling Waste:

All wastes subject to regulation will be handled in compliance with applicable laws to minimize the potential for leaks or spills to the environment. Kerr-McGee also maintains a Spill Control and Countermeasure Plan, which includes notification requirements, including the BIA, for all reportable spills of oil, produced liquids, and hazardous materials.

Any accidental release, such as a leak or spill in excess of the reportable quantity, as established by 40 CFR Part 117.3, will be reported as per the requirements of CERCLA, Section 102 B. If a release involves petroleum hydrocarbons or produced liquids, Kerr-McGee will comply with the notification requirements of NTL-3A. Drill cuttings and/or drilling fluids will be contained in the reserve/frac pit whether a closed loop system is used or not. Cuttings will be buried in pit(s) upon closure. Unless specifically approved by the BIA, no oil or other oil-based drilling additives, chromium/metals-based, or saline muds will be used during drilling. Only fresh water (as specified above), biodegradable polymer soap, bentonite clay, and/or non-toxic additives will be used in the mud system.

Pits will be constructed to minimize the accumulation of surface precipitation runoff into the pit (via appropriate placement of subsoil storage areas and/or construction of berms, ditches, etc.). Should unexpected liquid petroleum hydrocarbons (crude oil or condensate) be encountered during drilling, completions or well testing, liquid petroleum hydrocarbons will either be contained in test tanks on the well site or evacuated by vacuum trucks and transported to an approved disposal/sales facility. Should petroleum hydrocarbons unexpectedly be released into a pit, they will be removed as soon as practical but in no case will they remain longer than 72 hours unless an alternate is approved by the BIA. Should timely removal not be feasible, the pit will be netted as soon as practical. Similarly, hydrocarbon removal will take place prior to the closure of the pit, unless authorization is provided for disposal via alternate pit closure methods (e.g. solidification).

The reserve and/or fracture stimulation pit will be lined with an impermeable liner. The liner will be a synthetic material 30 mil or thicker. The bottom and side walls of the pit will be void of any sharp rocks that could puncture the liner. The liner will be installed over smooth fill subgrade that is free of pockets, loose rocks, or other materials (i.e. sand, sifted dirt, bentonite, straw, etc.) that could damage the liner. After evaporation and when dry, the reserve pit liners will be cut off, ripped and/or folded back (as safety considerations allow) as near to the mud surface as possible and buried on location or hauled to a landfill prior to backfilling the pit with a minimum of five feet of soil material.

Where necessary and if conditions (freeboard, etc.) allow, produced liquids from newly completed wells may be temporarily disposed of into pits for a period not to exceed 90 days as per Onshore Order Number 7 (OSO 7). Subsequently, permanent approved produced water disposal methods will be employed in accordance with OSO 7 and/or as described in a Water Management Plan (WMP). Otherwise, fluids disposal locations and associated haul routes, for ROW consideration, are typically depicted on Topo A of individual projects. Revisions to the water source or method of transportation will be subject to written approval from the BIA.

Any additional pits necessary for subsequent operations, such as temporary flare or workover pits, will be contained within the originally approved well pad and disturbance boundaries. Such temporary pits will be backfilled and reclaimed within 180 days of completion of work at a well location.

Pits containing drilling cuttings, mud, and/or completions fluids will be allowed to dry. Any free fluids remaining after one year from reaching total depth, date of completion, and/or determination of inactivity will be removed (as weather conditions allow) to an approved site and the pit reclaimed. Installation and operation of any sprinklers, pumps, and equipment will ensure that water spray or mist does not drift.

No garbage or non-exempt substances as defined by Resource Conservation and Recovery Act (RCRA) subtitle C will be placed in the reserve pit. All refuse (trash and other solid waste including cans, paper, cable, etc.) generated during construction, drilling, completion, and well testing activities will be contained in an enclosed receptacle, removed from the drill locations promptly, and transported to an approved disposal facility. Immediately after removal of the drilling rig, all debris and other waste materials not contained within trash receptacles will be collected and removed from the well location.

For the protection of livestock and wildlife, all open pits (excluding flare pits) will be fenced to prevent wildlife or livestock entry. Total height of pit fencing will be at least 42 inches and corner posts will be cemented and/or braced in such a manner as to keep the fence tight at all times. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet. Siphons, catchments, and absorbent pads will be installed to keep hydrocarbons produced by the drilling rig or other equipment on location from entering the reserve pit. Hydrocarbons, contaminated pads, and/or soils will be disposed of in accordance with state and federal requirements.

Portable, self-contained chemical toilets and/or sewage processing facilities will be provided for human waste disposal. Upon completion of operations, or as required, the toilet holding tanks will be pumped and the contents disposed of in an approved sewage disposal facility. All applicable regulations pertaining to disposal of human and solid waste will be observed.

Materials Management

Hazardous materials above reportable quantities will not be produced by drilling or completing proposed wells or constructing the pipelines/facilities. The term "hazardous materials" as used here means: (1) any substance, pollutant, or containment listed as hazardous under the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) of 1980, as amended 42 U.S.C. 9601 et seq., and the regulations issued under CERCLA; and (2) any hazardous waste as defined in RCRA of 1976, as amended. In addition, no extremely hazardous substance, as defined in 40 CFR 355, in threshold planning quantities, would be used, produced, stored, transported, or disposed of while producing any well.

Hazardous materials may be contained in some grease or lubricants, solvents, acids, paint, and herbicides, among others as defined above. Kerr-McGee maintains a file, per 29 CFR 1910.1200 (g) containing current Material Safety Data Sheets (MSDS) for all chemicals, compounds, and/or substances that are used during the course of construction, drilling, completion, and production operations for this project. The transport, use, storage and handling of hazardous materials will follow procedures specified by federal and state regulations. Transportation of hazardous materials to the well location is regulated by the Department of Transportation (DOT) under 49 CFR, Parts 171-180. DOT regulations pertain to the packing, container handling, labeling, vehicle placarding, and other safety aspects.

Potentially hazardous materials used in the development or operation of wells will be kept in limited quantities on well sites and at the production facilities for short periods of time. Chemicals meeting the criteria for being an acutely hazardous material/substance or meet the quantities criteria per BLM Instruction Memorandum No. 93-344 will not be used.

Chemicals subject to reporting under Title III of the Superfund Amendments and Reauthorization Act (SARA) in quantities of 10,000 pounds or more may be produced and/or stored at production facilities (crude oil/condensate, produced water). They may also be kept in limited quantities on drilling sites (barite, diesel fuel, cement, cottonseed hulls etc.) for short periods of time during drilling or completion activities.

Fluids disposal and pipeline/haul routes are depicted on Topo Map A.

Any produced water separated from recoverable condensate from the proposed well will be contained in a water tank and will then be transported by pipeline and/or truck to one of the pre-approved disposal sites:

RNI in Sec. 5 T9S R22E
NBU #159 in Sec. 35 T9S R21E
Ace Oilfield in Sec. 2 T6S R20E
MC&MC in Sec. 12 T6S R19E
Pipeline Facility in Sec. 36 T9S R20E
Goat Pasture Evaporation Pond in SW/4 Sec. 16 T10S R22E
Bonanza Evaporation Pond in Sec. 2 T10S R23E

Or to one of the following Kerr-McGee active Salt Water Disposal (SWD) wells:

NBU 159 SWD in Sec. 35 T9S R21E
CIGE 112D SWD in Sec. 19 T9S R21E
CIGE 114 SWD in Sec. 34 T9S R21E
NBU 921-34K SWD in Sec. 34 T9S R21E
NBU 921-33F SWD in Sec. 34 T9S R21E

H. Ancillary Facilities:

No additional ancillary facilities are planned for this location.

I. Well Site Layout:

The location, orientation and aerial extent of each drill pad, reserve/completion/flare pit (for closed loop or non-closed loop operations), access road ingress/egress points, drilling rig, dikes/ditches, existing wells/infrastructure, proposed cuts and fills, and topsoil and spoil material stockpile locations are depicted on the exhibits for each project, where applicable. Site-specific conditions may require slight deviation in actual equipment depending on whether a closed loop system is used. Surface distance may be less if using closed loop. But in either case, the area of disturbance will not exceed the maximum disturbance outlined in the attached exhibits.

For the protection of livestock and wildlife, all open pits and cellars will be fenced to prevent wildlife or livestock entry. Total height of pit fencing will be at least 42 inches and corner posts will be cemented and/or braced in such a manner as to keep the fence tight at all times. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

Each well will utilize either a centralized tank battery, centralized fluids management system, or have tanks installed on its pad. Production/ Produced Liquid tanks will be constructed, maintained, and operated to prevent unauthorized surface or subsurface discharges of liquids and to prevent livestock or wildlife entry. The tanks will be kept reasonably free from surface accumulations of liquid hydrocarbons. The tanks are not to be used for disposal of liquids from additional sources without prior approval of BIA.

J. Plans for Surface Reclamation:

The surface reclamation will be undertaken in two phases: interim and final. Interim reclamation is conducted following well completion and extends through the period of production. Interim reclamation is for the area of the well pad that is not required for production activities. Final reclamation is conducted following well plugging/conversion and/or facility abandonment processes.

Reclamation activities in both phases may include but is not limited to the re-contouring or re-configuration of topographic surfaces, restoration of drainage systems, segregation of spoils materials, minimizing surface disturbance, re-evaluating backfill requirements, pit closure, topsoil redistribution, soil treatments, seeding and weed control.

Interim Reclamation

Interim reclamation may include pit evaporation, fluid removal, pit solidification, re-contouring, ripping, spreading top soil, seeding, and/or weed control. Interim reclamation will be performed in accordance with OSO 1, or written notification will be provided to the BIA for approval. Where feasible, drilling locations, reserve pits, or access routes not utilized for production operations will be re-contoured to a natural appearance.

Interim re-contouring involves bringing all construction material from cuts and fills back onto the well pad and site and reestablishing the natural contours where desirable and practical. Fill and stockpiled spoils no longer necessary to the operation will be spread on the cut slopes and covered with stockpiled topsoil. All stockpiled top soils will be used for interim reclamation where practical to maintain soil viability. Where possible, the land surface will be left "rough" after re-contouring to ensure that the maximum surface area will be available to support the reestablishment of vegetative cover.

A reserve pit, upon being allowed to dry, will be backfilled and compacted with cover materials that are void of any topsoil, vegetation, large stones, rocks or foreign objects. Soils that are moisture laden, saturated, or partially/completely frozen will not be used for backfill or cover. The pit area will be mounded to allow for settling and to promote positive surface drainage away from the pit. Disposal of pit fluids and linings is discussed in Section G.

Final Reclamation

Final reclamation will be performed for unproductive wells and after the end of the life of a productive well. As soon as practical after the conclusion of drilling and testing operations, unproductive drill holes will be plugged and abandoned (P&A). Site and road reclamation will commence following plugging. In no case will reclamation at non-producing locations be initiated later than six (6) months from the date a well is plugged. A joint inspection of the disturbed area to be reclaimed may be requested by Kerr-McGee. The primary purpose of this inspection will be to review the existing conditions, or agree upon a revised final reclamation and abandonment plan. The BIA will be notified prior to commencement of reclamation operations. A Notice of Intent to Abandon will be filed for final recommendations regarding surface reclamation.

After plugging, all wellhead equipment that is no longer needed will be removed, and the well site will be reclaimed. Final contouring will blend with and follow as closely as practical the natural terrain and contours of the original site and surrounding areas. After re-contouring the site to the approximate contour that existed prior to pad construction, final grading will be conducted over the entire surface of the well site and access road. The area will be ripped to a depth of 18 to 24 inches on 18 to 24-inch centers, where practical. The surface soil material will be pitted with small depressions to form longitudinal depressions 12 to 18 inches deep, where practical. The entire area will be uniformly covered with the depressions constructed perpendicular to the natural flow of water.

Reclamation of roads will be performed at the discretion of the BIA/Tribe. All unnecessary surface equipment and structures (e.g. cattle guards) and water control structures (e.g. culverts, drainage pipes) not needed to facilitate successful reclamation will be removed during final reclamation. Roads that will be reclaimed will be ripped to a depth of 18 inches where practical, re-contoured to approximate the original contour of the ground and seeded in accordance with the seeding specifications as proposed below in "Measures Common to Interim and Final Reclamation".

Upon successfully completing reclamation of a P&A location, a Final Abandonment Notice will be submitted to the BIA/Tribe.

Measures Common to Interim and Final Reclamation

Soil preparation will be conducted using a disk for areas in need of more soil preparation following site preparation. This will provide primary soil tillage to a depth no greater than 6 inches. Prior to reseeding, compacted areas will be scarified by ripping or chiseling to loosen compacted soils, promote water infiltration, and improve soil aeration and root penetration.

Seeding will occur year-round as conditions allow and will typically be accomplished through the use of a no-till rangeland style seed drill with a "picker box" in order to seed "fluffy" seed. Where drill seeding is not the preferred method, seed will be broadcast and then raked into the ground at double the rate of drill seeding. Seed mixes appropriate to the native plant community as determined and specified for each project location based on the site specific soils will be used for re-vegetation. The seed mixes will be selected from a list provided by or approved by the BIA/Tribe or a specific seed mix will be proposed by Kerr-McGee to the BIA/Tribe and used after its approval. The selected specific seed mix for each well location and road segment will be utilized while performing interim and final reclamation for each project. All seed will be certified and tags will be maintained by Kerr-McGee. Every effort will be made to obtain "cheat grass free seed".

Seed Mix to be used for Well Site, Access Road, and Pipeline (as applicable):

Indian Ricegrass (Nezpar)	3
Sandberg Bluegrass	0.75
Bottlebrush Squirreltail	1
Great Basin Wildrye	0.5
Crested Wheatgrass	1.5
Winterfat	0.25
Shadscale	1.5
Four-wing Saltbrush	0.75
Forage Kochia	0.25
Total	9.5

Additional soil amendments and/or stabilization may be required on sites with poor soils and/or excessive erosion potential. Where severe erosion can become a problem and/or the use of machinery is not practical, seed will be hand broadcast and raked with twice the specified amount of seed. Slopes will be stabilized using materials specifically designed to prevent erosion on steep slopes and hold seed in place so vegetation can become permanently established. These materials will include, but are not limited to: erosion control blankets, hydro-mulch, and/or bonded fiber matrix at a rate to achieve a minimum of 80 percent soil coverage.

Weed Control

Noxious weeds will be controlled in all affected areas in accordance with all applicable rules and regulations.

K. Surface/Mineral Ownership:

Ute Indian Tribe	United States of America
P.O. Box 70	Bureau of Land Management
988 South 7500 East Annex Building	170 South 500 East
Fort Duchesne, UT 84026	Vernal, UT 84078
(435) 722-4307	(435)781-4400

L. Other Information:**Cultural and Paleontological Resources**

All personnel are strictly prohibited from collecting artifacts, any paleontological specimens or fossils, and from disturbing any significant cultural resources in the area. If artifacts, fossils, or any culturally sensitive materials are exposed or identified in the area of construction, all construction operations that would affect the newly discovered resource will cease, and Kerr-McGee will provide immediate notification to the BIA.

Resource Reports:

A Class I literature survey was completed on October 4, 2012 by Montgomery Archaeological Consultants, Inc (MOAC). For additional details please refer to report MOAC 12-287.

A paleontological reconnaissance survey was completed on October 5, 2012 by SWCA Environmental Consultants. For additional details please refer to report UT-06-009C.

Biological field survey was completed on October 2, 2012 by Grasslands Consulting, Inc (GCI). For additional details please refer to report GCI-848

Proposed Action Annual Emissions Tables:

Table 1: Proposed Action Annual Emissions (tons/year) ¹			
Pollutant	Development	Production	Total
NOx	3.8	0.12	3.92
CO	2.2	0.11	2.31
VOC	0.1	4.9	5
SO ₂	0.005	0.0043	0.0093
PM ₁₀	1.7	0.11	1.81
PM _{2.5}	0.4	0.025	0.425
Benzene	2.2E-03	0.044	0.046
Toluene	1.6E-03	0.103	0.105
Ethylbenzene	3.4E-04	0.005	0.005
Xylene	1.1E-03	0.076	0.077
n-Hexane	1.7E-04	0.145	0.145
Formaldehyde	1.3E-02	8.64E-05	1.31E-02

¹ Emissions include 1 producing well and associated operations traffic during the year in which the project is developed

NBU 920-22K4CS/920-22N1BS/ 920-22N1DS/ 920-22N4BS
 Kerr-McGee Oil Gas Onshore, L.P.

Surface Use Plan of Operations
 14 of 15

Table 2: Proposed Action versus 2012 WRAP Phase III Emissions Inventory Comparison			
Species	Proposed Action Production Emissions (ton/yr)	WRAP Phase III 2012 Uintah Basin Emission Inventory^a (ton/yr)	Percentage of Proposed Action to WRAP Phase III
NOx	15.68	16,547	0.09%
VOC	20	127,495	0.02%

^a http://www.wrapair.org/forums/ogwg/PhaseIII_Inventory.html

Uintah Basin Data

NBU 920-22K4CS/920-22N1BS/ 920-22N1DS/ 920-22N4BS
Kerr-McGee Oil Gas Onshore, L.P.

Surface Use Plan of Operations
15 of 15

M. Lessee's or Operators' Representative & Certification:

Cara Mahler
Regulatory Analyst I
Kerr-McGee Oil & Gas Onshore LP
PO Box 173779
Denver, CO 80217-3779
(720) 929-6156

Tommy Thompson
General Manager, Drilling
Kerr-McGee Oil & Gas Onshore LP
PO Box 173779
Denver, CO 80217-3779
(720) 929-6724

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Kerr-McGee Oil & Gas Onshore LP is considered to be the operator of the subject well. Kerr-McGee Oil & Gas Onshore LP agrees to be responsible under terms and conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for lease activities is being provided by Bureau of Land Management Nationwide Bond WYB000291.

I hereby certify that I, or persons under my supervision, have inspected the proposed drill site and access route, that I am familiar with the conditions that currently exist; that I have full knowledge of the State and Federal laws applicable to this operation; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

Cara Mahler

October 16, 2012

Date

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office

P.O. Box 45155

Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:

3160

(UT-922)

December 10, 2012

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2012 Plan of Development Natural Buttes Unit
Uintah County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2012 within the Natural Buttes Unit, Uintah County, Utah.

API #	WELL NAME	LOCATION
(Proposed PZ WASATCH-MESA VERDE)		
NBU 921-20J PAD		
43-047-53371	NBU 921-20K4BS	Sec 20 T09S R21E 1713 FSL 2458 FEL BHL Sec 20 T09S R21E 1903 FSL 2134 FWL
43-047-53372	NBU 921-20K1CS	Sec 20 T09S R21E 1717 FSL 2449 FEL BHL Sec 20 T09S R21E 2234 FSL 2134 FWL
43-047-53373	NBU 921-20K1BS	Sec 20 T09S R21E 1722 FSL 2440 FEL BHL Sec 20 T09S R21E 2564 FSL 2134 FWL
43-047-53374	NBU 921-20J1CS	Sec 20 T09S R21E 1734 FSL 2413 FEL BHL Sec 20 T09S R21E 2068 FSL 1806 FEL
43-047-53375	NBU 921-20J1BS	Sec 20 T09S R21E 1730 FSL 2422 FEL BHL Sec 20 T09S R21E 2399 FSL 1806 FEL
NBU 921-20N PAD		
43-047-53377	NBU 920-22K4CS	Sec 22 T09S R20E 1225 FSL 2418 FWL BHL Sec 22 T09S R20E 1491 FSL 2192 FWL
43-047-53378	NBU 920-22N1BS	Sec 22 T09S R20E 1209 FSL 2406 FWL BHL Sec 22 T09S R20E 1151 FSL 2119 FWL
43-047-53379	NBU 920-22N4BS	Sec 22 T09S R20E 1200 FSL 2401 FWL BHL Sec 22 T09S R20E 0551 FSL 2078 FWL


 Michael L. Coulthard

Digitally signed by Michael L. Coulthard
 DN: cn=Michael L. Coulthard, o=Bureau of Land Management,
 ou=Branch of Minerals, email=Michael_Coulthard@blm.gov, c=US
 Date: 2012.12.10 10:29:51 -0700

RECEIVED: December 11, 2012

API Well Number: 43047533790000

bcc: File - Natural Buttes Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron
Fluid Chron

MCoulthard:mc:12-10-12

RECEIVED: December 11, 2012

WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 12/5/2012

API NO. ASSIGNED: 43047533790000

WELL NAME: NBU 920-22N4BS

OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P. (N2995)

PHONE NUMBER: 720 929-6029

CONTACT: Cara Mahler

PROPOSED LOCATION: SESW 22 090S 200E

Permit Tech Review: ☒

SURFACE: 1200 FSL 2401 FWL

Engineering Review: ☒

BOTTOM: 0551 FSL 2078 FWL

Geology Review: ☒

COUNTY: UINTAH

LATITUDE: 40.01669

LONGITUDE: -109.65352

UTM SURF EASTINGS: 614909.00

NORTHINGS: 4430478.00

FIELD NAME: NATURAL BUTTES

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU0577A

PROPOSED PRODUCING FORMATION(S): WASATCH-MESA VERDE

SURFACE OWNER: 2 - Indian

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

☒ PLAT☒ Bond: FEDERAL - WYB000291☐ Potash☒ Oil Shale 190-5☐ Oil Shale 190-3☐ Oil Shale 190-13☒ Water Permit: 43-8496☐ RDCC Review:☐ Fee Surface Agreement☒ Intent to Commingle

Commingle Approved

LOCATION AND SITING:

☐ R649-2-3.

Unit: NATURAL BUTTES

☐ R649-3-2. General☐ R649-3-3. Exception☒ Drilling Unit

Board Cause No: Cause 173-14

Effective Date: 12/2/1999

Siting: Suspends General Siting

☒ R649-3-11. Directional Drill

Comments: Presite Completed

Stipulations: 3 - Commingle - ddoucet
4 - Federal Approval - dmason
15 - Directional - dmason
17 - Oil Shale 190-5(b) - dmason

RECEIVED: December 11, 2012



GARY R. HERBERT
Governor

GREGORY S. BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: NBU 920-22N4BS
API Well Number: 43047533790000
Lease Number: UTU0577A
Surface Owner: INDIAN
Approval Date: 12/11/2012

Issued to:

KERR-MCGEE OIL & GAS ONSHORE, L.P., P.O. Box 173779, Denver, CO 80217

Authority:

Pursuant to Utah Code Ann. 40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 173-14. The expected producing formation or pool is the WASATCH-MESA VERDE Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

Commingle:

In accordance with Board Cause No. 173-14, commingling of the production from the Wasatch formation and the Mesaverde formation in this well is allowed.

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

In accordance with the Order in Cause No. 190-5(b) dated October 28, 1982, the operator shall comply with the requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operators shall ensure that the surface and or production casing is properly cemented over the entire oil

shale section as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the division.

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well - contact Carol Daniels at 801-538-5284

(please leave a voicemail message if not available)

OR

submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website

at <http://oilgas.ogm.utah.gov>

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) - due within 5 days of spudding the well
- Monthly Status Report (Form 9) - due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) - due prior to implementation
- Written Notice of Emergency Changes (Form 9) - due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) - due prior to implementation
- Report of Water Encountered (Form 7) - due within 30 days after completion
- Well Completion Report (Form 8) - due within 30 days after completion or plugging

Approved By:

A handwritten signature in black ink, appearing to read 'John Rogers', written over a horizontal line.

For John Rogers
Associate Director, Oil & Gas

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU0577A
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: The Ut
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 920-22N4BS
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1200 FSL 2401 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 22 Township: 09.0S Range: 20.0E Meridian: S		9. API NUMBER: 43047533790000
5. PHONE NUMBER: 720 929-6510		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: UINTAH		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 12/11/2013 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </div> <div style="width: 33%;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </div> <div style="width: 33%;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/> </div> </div>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. Kerr-McGee Oil & Gas Onshore, L.P. (Kerr-McGee) respectfully requests an extension to this APD for the maximum time allowed. Please contact the undersigned with any questions and/or comments. Thank you.		
NAME (PLEASE PRINT) Kay E. Kelly		PHONE NUMBER 720 929 6582
SIGNATURE N/A		TITLE Regulatory Analyst
DATE 10/16/2013		APPROVED BY: <div style="text-align: center;"> Approved by the Utah Division of Oil, Gas and Mining Date: <u>October 17, 2013</u> By: </div>



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047533790000

API: 43047533790000

Well Name: NBU 920-22N4BS

Location: 1200 FSL 2401 FWL QTR SESW SEC 22 TWNP 090S RNG 200E MER S

Company Permit Issued to: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date Original Permit Issued: 12/11/2012

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☒ Yes ☐ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Kay E. Kelly

Date: 10/16/2013

Title: Regulatory Analyst Representing: KERR-MCGEE OIL & GAS ONSHORE, L.P.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU0577A
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 920-22N4BS
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1200 FSL 2401 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 22 Township: 09.0S Range: 20.0E Meridian: S		9. API NUMBER: 43047533790000
PHONE NUMBER: 720 929-6114		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: UINTAH		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 11/19/2014	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:			
<input type="checkbox"/> SPUD REPORT Date of Spud:			
<input type="checkbox"/> DRILLING REPORT Report Date:			

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
 Kerr-McGee Oil & Gas Onshore, L.P. (Kerr-McGee) respectfully requests an extension to this APD for the maximum time allowed. Please contact the undersigned with any questions and/or comments. Thank you.

Approved by the
November 25, 2014
Oil, Gas and Mining

Date: _____

By:

NAME (PLEASE PRINT) Kay E. Kelly	PHONE NUMBER 720 929 6582	TITLE Regulatory Analyst
SIGNATURE N/A	DATE 11/19/2014	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047533790000

API: 43047533790000

Well Name: NBU 920-22N4BS

Location: 1200 FSL 2401 FWL QTR SESW SEC 22 TWNP 090S RNG 200E MER S

Company Permit Issued to: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date Original Permit Issued: 12/11/2012

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☒ Yes ☐ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Kay E. Kelly

Date: 11/19/2014

Title: Regulatory Analyst Representing: KERR-MCGEE OIL & GAS ONSHORE, L.P.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU0577A
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 920-22N4BS
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1200 FSL 2401 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 22 Township: 09.0S Range: 20.0E Meridian: S		9. API NUMBER: 43047533790000
PHONE NUMBER: 720 929-6507		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: UINTAH		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 11/30/2015	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:			
<input type="checkbox"/> SPUD REPORT Date of Spud:			
<input type="checkbox"/> DRILLING REPORT Report Date:			

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.
 Kerr-McGee Oil & Gas Onshore, L.P. (Kerr-McGee) respectfully requests an extension to this APD for the maximum time allowed. Please contact the undersigned with any questions and/or comments. Thank you.

Approved by the
 Utah Division of
 Oil, Gas and Mining

Date: _____

By:

NAME (PLEASE PRINT) Jennifer Thomas	PHONE NUMBER 720 929-6808	TITLE Regulatory Specialist
SIGNATURE N/A	DATE 11/30/2015	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047533790000

API: 43047533790000

Well Name: NBU 920-22N4BS

Location: 1200 FSL 2401 FWL QTR SESW SEC 22 TWNP 090S RNG 200E MER S

Company Permit Issued to: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date Original Permit Issued: 12/11/2012

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☒ Yes ☐ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Jennifer Thomas

Date: 11/30/2015

Title: Regulatory Specialist Representing: KERR-MCGEE OIL & GAS ONSHORE, L.P.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

NOV 19 2012

FORM APPROVED
OMB No. 1004-0136
Expires July 31, 2010

APPLICATION FOR PERMIT TO DRILL OR REENTER


BLM

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU0577A
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator KERR MCGEE OIL & GAS LP Contact: CARA MAHLER E-Mail: cara.mahler@anadarko.com		7. If Unit or CA Agreement, Name and No. UTU63047A
3a. Address PO BOX 173779 DENVER, CO 80202-3779		8. Lease Name and Well No. NBU 920-22N4BS
3b. Phone No. (include area code) Ph: 720-929-6029 Fx: 720-929-7029		9. API Well No. 43-047-53379
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SESW 1200FSL 2401FWL 40.016739 N Lat, 109.653559 W Lon At proposed prod. zone SESW 551FSL 2078FWL 40.014941 N Lat, 109.654663 W Lon		10. Field and Pool, or Exploratory NATURAL BUTTES
14. Distance in miles and direction from nearest town or post office* APPROXIMATELY 38 MILES SOUTH OF VERNAL UTAH.		11. Sec., T., R., M., or Blk. and Survey or Area Sec 22 T9S R20E Mer SLB
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 551'	16. No. of Acres in Lease 2560.00	12. County or Parish UINTAH
17. Spacing Unit dedicated to this well	13. State UT	
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 858'	19. Proposed Depth 11768 MD 11108 TVD	20. BLM/BIA Bond No. on file WYB000291
21. Elevations (Show whether DF, KB, RT, GL, etc.) 4943 GL	22. Approximate date work will start 02/16/2012	23. Estimated duration 60-90 DAYS

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification
6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature (Electronic Submission)	Name (Printed/Typed) CARA MAHLER Ph: 720-929-6029	Date 10/19/2012
Title REGULATORY ANALYST		
Approved by (Signature) 	Name (Printed/Typed) Jerry Kenczka	Date DEC 21 2015
Title Assistant Field Manager Lands & Mineral Resources	Office VERNAL FIELD OFFICE	

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

CONDITIONS OF APPROVAL ATTACHED

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

Additional Operator Remarks (see next page)

Electronic Submission #155505 verified by the BLM Well Information System
For KERR MCGEE OIL & GAS LP, sent to the Vernal
Committed to AFMSS for processing by JOHNETTA MAGEE on 11/09/2012


JAN 11 2016

DIV. OF OIL, GAS & MINING

NOTICE OF APPROVAL

** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED **

UDOGM



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: KERR MCGEE OIL & GAS LP
Well No: NBU 920-22N4BS
API No: 43-047-53379

Location: SESW SEC 22 T09S R20E
Lease No: UTU0577A
Agreement: UTU63047A

OFFICE NUMBER: (435) 781-4400

OFFICE FAX NUMBER: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Location Construction (Notify Environmental Scientist)	- Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	- Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	- Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to running casing and cementing all casing strings to: blm ut vn opreport@blm.gov
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	- Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

**SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

- U&O-FY15-122 (Categorical Exclusion)
 - All original conditions of approval within the original Right-of-Way Grant applies to this pending modification.
- U&O-FY09-Q4-003 (Environmental Assessment)
 - Paint facilities "Shadow Grey."
 - Utilize pit-run/gravel for well pad and access road support.
 - Monitor location by a permitted archaeologist during the construction process.
 - If project construction operations are scheduled to occur after December 31, 2009, KMG should conduct additional raptor surveys in accordance with the guidelines specified in the Utah Field Office Guidelines for Raptor Protection from Human and Land Use Disturbances, 2002 (See Appendix E) and conduct its operations according to applicable seasonal restrictions and spatial offsets.
 - If project construction operations are scheduled to occur after June 16, 2010, KMG should conduct additional biological surveys in accordance with the guidelines specified in the USFWS Rare Plant Conservation Measures for Uinta Basin hookless cactus (See Appendix E) and conduct its operations according to its specifications.

**DOWNHOLE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

SITE SPECIFIC DOWNHOLE COAs:

- Cement for the 4.5 inch casing shall be brought up to a minimum of 200 feet above the surface casing shoe.
- A CBL shall be run from TD to TOC in the production casing.
- Variances shall be granted as requested in the APD under section 9 of the drilling program.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.

- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in CD (compact disc) format to the Vernal BLM Field Office. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- For information regarding production reporting, contact the Office of Natural Resources Revenue (ONRR) at www.ONRR.gov.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).

- The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
- The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
- Unit agreement and/or participating area name and number, if applicable.
- Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.
- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.

- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9			
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU0577A			
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE			
2. NAME OF OPERATOR: KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. UNIT or CA AGREEMENT NAME: NATURAL BUTTES			
3. ADDRESS OF OPERATOR: P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779		8. WELL NAME and NUMBER: NBU 920-22N4BS			
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1200 FSL 2401 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SESW Section: 22 Township: 09.0S Range: 20.0E Meridian: S		9. API NUMBER: 43047533790000			
PHONE NUMBER: 720 929-6454		9. FIELD and POOL or WILDCAT: NATURAL BUTTES			
COUNTY: UINTAH		STATE: UTAH			
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA					
TYPE OF SUBMISSION	TYPE OF ACTION				
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 11/2/2016 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/> </td> </tr> </table>		<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>
<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input style="width: 100px;" type="text"/>			
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. Kerr-McGee Oil & Gas Onshore, L.P. (Kerr-McGee) respectfully requests an extension to this APD for the maximum time allowed. Please contact the undersigned with any questions and/or comments. Thank you.					
Approved by the November 03, 2016 Oil, Gas and Mining Date: _____ By:					
NAME (PLEASE PRINT) Joel Malefy	PHONE NUMBER 720 929-6828	TITLE Regulatory Analyst			
SIGNATURE N/A	DATE 11/2/2016				



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047533790000

API: 43047533790000

Well Name: NBU 920-22N4BS

Location: 1200 FSL 2401 FWL QTR SESW SEC 22 TWNP 090S RNG 200E MER S

Company Permit Issued to: KERR-MCGEE OIL & GAS ONSHORE, L.P.

Date Original Permit Issued: 12/11/2012

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☒ Yes ☐ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Joel Malefyt

Date: 11/2/2016

Title: Regulatory Analyst Representing: KERR-MCGEE OIL & GAS ONSHORE, L.P.