

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT

| | | | | | | | | | | |
|--|-----------|------------------|--|---------|--|--|----------------------------|----------|-------|--------|
| APPLICATION FOR PERMIT TO DRILL | | | | | | 1. WELL NAME and NUMBER Ute Tribal 15-14-4-1W | | | | |
| 2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/> | | | | | | 3. FIELD OR WILDCAT WILKIN RIDGE | | | | |
| 4. TYPE OF WELL Oil Well Coalbed Methane Well: NO | | | | | | 5. UNIT or COMMUNITIZATION AGREEMENT NAME | | | | |
| 6. NAME OF OPERATOR NEWFIELD PRODUCTION COMPANY | | | | | | 7. OPERATOR PHONE 435 646-4825 | | | | |
| 8. ADDRESS OF OPERATOR Rt 3 Box 3630 , Myton, UT, 84052 | | | | | | 9. OPERATOR E-MAIL mcrozier@newfield.com | | | | |
| 10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) 14-20-H62-6500 | | | 11. MINERAL OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input checked="" type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/> | | | 12. SURFACE OWNERSHIP FEDERAL <input type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/> | | | | |
| 13. NAME OF SURFACE OWNER (if box 12 = 'fee') Wayne and Moreen Henderson | | | | | | 14. SURFACE OWNER PHONE (if box 12 = 'fee') | | | | |
| 15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee') Rt 3 Box 3671, , | | | | | | 16. SURFACE OWNER E-MAIL (if box 12 = 'fee') | | | | |
| 17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN') | | | 18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/> | | | 19. SLANT VERTICAL <input checked="" type="checkbox"/> DIRECTIONAL <input type="checkbox"/> HORIZONTAL <input type="checkbox"/> | | | | |
| 20. LOCATION OF WELL | | FOOTAGES | | QTR-QTR | SECTION | TOWNSHIP | RANGE | MERIDIAN | | |
| LOCATION AT SURFACE | | 628 FSL 2157 FEL | | SWSE | 14 | 4.0 S | 1.0 W | U | | |
| Top of Uppermost Producing Zone | | 628 FSL 2157 FEL | | SWSE | 14 | 4.0 S | 1.0 W | U | | |
| At Total Depth | | 628 FSL 2157 FEL | | SWSE | 14 | 4.0 S | 1.0 W | U | | |
| 21. COUNTY UINTAH | | | 22. DISTANCE TO NEAREST LEASE LINE (Feet) 483 | | | 23. NUMBER OF ACRES IN DRILLING UNIT 1320 | | | | |
| | | | 25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 40 | | | 26. PROPOSED DEPTH MD: 7135 TVD: 7135 | | | | |
| 27. ELEVATION - GROUND LEVEL 4995 | | | 28. BOND NUMBER RLB0010462 | | | 29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 437478 | | | | |
| Hole, Casing, and Cement Information | | | | | | | | | | |
| String | Hole Size | Casing Size | Length | Weight | Grade & Thread | Max Mud Wt. | Cement | Sacks | Yield | Weight |
| SURF | 12.25 | 8.625 | 0 - 500 | 24.0 | J-55 ST&C | 8.3 | Class G | 229 | 1.17 | 15.8 |
| PROD | 7.875 | 5.5 | 0 - 7135 | 15.5 | J-55 LT&C | 8.3 | Premium Lite High Strength | 355 | 3.26 | 11.0 |
| | | | | | | | 50/50 Poz | 363 | 1.24 | 14.3 |
| ATTACHMENTS | | | | | | | | | | |
| VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES | | | | | | | | | | |
| <input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER | | | | | <input checked="" type="checkbox"/> COMPLETE DRILLING PLAN | | | | | |
| <input checked="" type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE) | | | | | <input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER | | | | | |
| <input type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED) | | | | | <input checked="" type="checkbox"/> TOPOGRAPHICAL MAP | | | | | |
| NAME Mandie Crozier | | | TITLE Regulatory Tech | | | PHONE 435 646-4825 | | | | |
| SIGNATURE | | | DATE 07/09/2013 | | | EMAIL mcrozier@newfield.com | | | | |
| API NUMBER ASSIGNED 43047538880000 | | | APPROVAL | | |  Permit Manager | | | | |

**NEWFIELD PRODUCTION COMPANY
UTE TRIBAL 15-14-4-1W
AT SURFACE: SW/SE SECTION 14, T4S, R1W
UINTAH COUNTY, UTAH**

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

| | | |
|--------------------|--------------------|-------------------|
| Uinta | 0' – 2055' | |
| Green River | 2055' | |
| Wasatch | 6985' | |
| Proposed TD | TVD (7135') | MD (7135') |

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation (Oil) 2055' – 6985'

The above mentioned Oil Well will produce from the Green River Formation. Newfield proposes to drill into the top of the Wasatch Formation in order to make room for the rat hole.

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

| | |
|--|---|
| Location & Sampled Interval | Date Sampled |
| Flow Rate | Temperature |
| Hardness | pH |
| Water Classification (State of Utah) | Dissolved Calcium (Ca) (mg/l) |
| Dissolved Iron (Fe) (ug/l) | Dissolved Sodium (Na) (mg/l) |
| Dissolved Magnesium (Mg) (mg/l) | Dissolved Carbonate (CO ₃) (mg/l) |
| Dissolved Bicarbonate (NaHCO ₃) (mg/l) | Dissolved Chloride (Cl) (mg/l) |
| Dissolved Sulfate (SO ₄) (mg/l) | Dissolved Total Solids (TDS) (mg/l) |

4. **PROPOSED CASING PROGRAM**

a. Casing Design: Ute Tribal 15-14-4-1W

| Size | Interval | | Weight | Grade | Coupling | Design Factors | | |
|--------------------------|----------|--------|--------|-------|----------|----------------|---------------|------------------|
| | Top | Bottom | | | | Burst | Collapse | Tension |
| Surface casing 8-5/8" | 0' | 500' | 24.0 | J-55 | STC | 2,950 10.52 | 1,370 8.61 | 244,000 20.33 |
| Prod casing 5-1/2" | 0' | 7135' | 15.5 | J-55 | LTC | 4,810 2.12 | 4,040 1.78 | 217,000 1.96 |

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = (Frac gradient + 1.0 ppg) – gas gradient
- 2) Prod casing MASP (production mode) = Reservoir pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing = mud weight @ TD – gas gradient
- 4) All tension calculations assume air weight
- 5) Gas gradient assumed to equal 0.1 psi/ft

| | |
|--|--------------|
| Frac gradient at surface casing shoe = | 13.0 ppg |
| Pore pressure at surface casing shoe = | 8.33 ppg |
| Pore pressure at prod casing shoe = | 8.33 ppg |
| Gas gradient = | 0.115 psi/ft |

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. Cementing Design: Ute Tribal 15-14-4-1W

| Job | Fill | Description | Sacks | OH Excess* | Weight (ppg) | Yield (ft ³ /sk) |
|---------------------|--------|----------------------------------|-----------------|------------|--------------|-----------------------------|
| | | | ft ³ | | | |
| Surface casing | 500' | Class G w/ 2% CaCl | 229 | 30% | 15.8 | 1.17 |
| | | | 268 | | | |
| Prod casing Lead | 5,135' | Prem Lite II w/ 10% gel + 3% KCl | 355 1157 | 30% | 11.0 | 3.26 |
| Prod casing Tail | 2,000' | 50/50 Poz w/ 2% gel + 3% KCl | 363 451 | 30% | 14.3 | 1.24 |

*Actual volume pumped will be 15% over the caliper log

- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours

- Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement

level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to ± 500 feet will be drilled with an air/mist system. The air rig is equipped with a 6 1/2" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about ± 500 feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 500' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**


No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**


It is anticipated that the drilling operations will commence the fourth quarter of 2013, and take approximately seven (7) days from spud to rig release.

T4S, R1W, U.S.B.&M.

NEWFIELD EXPLORATION COMPANY

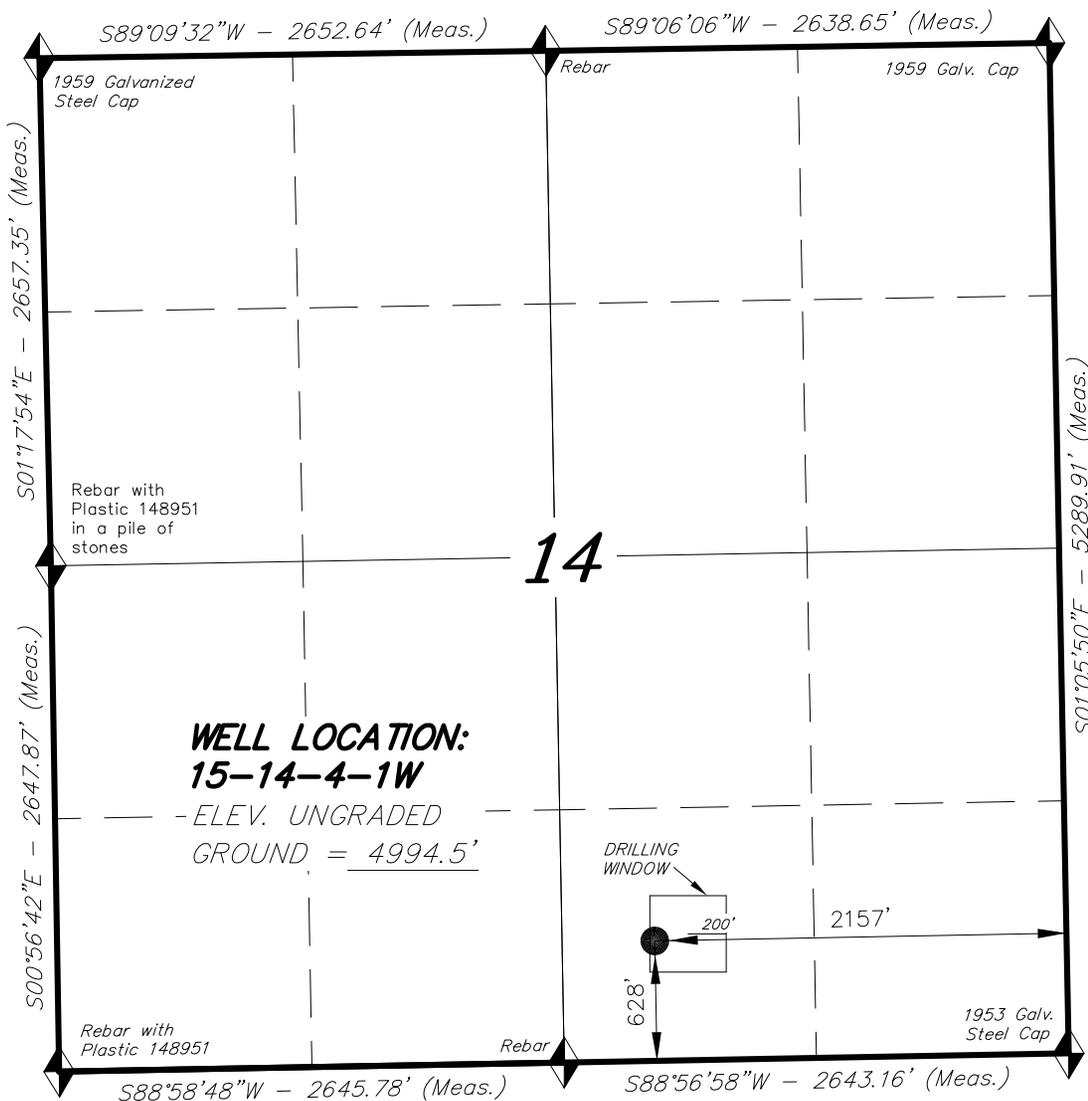

WELL LOCATION, 15-14-4-1W,
 LOCATED AS SHOWN IN THE SW 1/4
 SE 1/4 OF SECTION 14, T4S, R1W,
 U.S.B.&M. UINTAH COUNTY, UTAH.




NOTES:

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.



THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

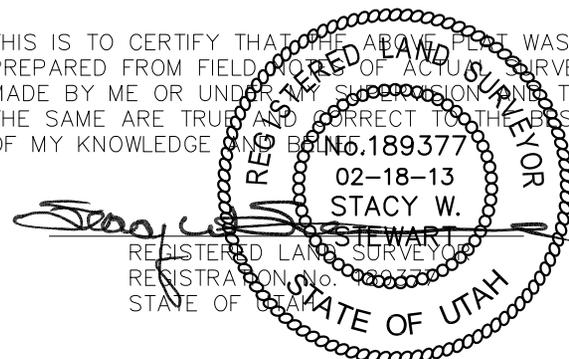

◆ = SECTION CORNERS LOCATED


BASIS OF ELEV; Elevations are based on an N.G.S. OPUS Correction. LOCATION: LAT. $40^{\circ}04'09.56''$ LONG. $110^{\circ}00'43.28''$ (Tristate Aluminum Cap) Elev. 5281.57'

| |
|-------------------------------------|
| NAD 83 (SURFACE LOCATION) |
| LATITUDE = $40^{\circ}07'46.08''$ |
| LONGITUDE = $109^{\circ}57'42.84''$ |
| NAD 27 (SURFACE LOCATION) |
| LATITUDE = $40^{\circ}07'46.22''$ |
| LONGITUDE = $109^{\circ}57'40.31''$ |

TRI STATE LAND SURVEYING & CONSULTING
 180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
 (435) 781-2501

| | | |
|----------------------------|-------------------|----------|
| DATE SURVEYED: 02-13-13 | SURVEYED BY: Q.M. | VERSION: |
| DATE DRAWN: 02-18-13 | DRAWN BY: V.H. | V1 |
| REVISED: | SCALE: 1" = 1000' | |

Access Road Map

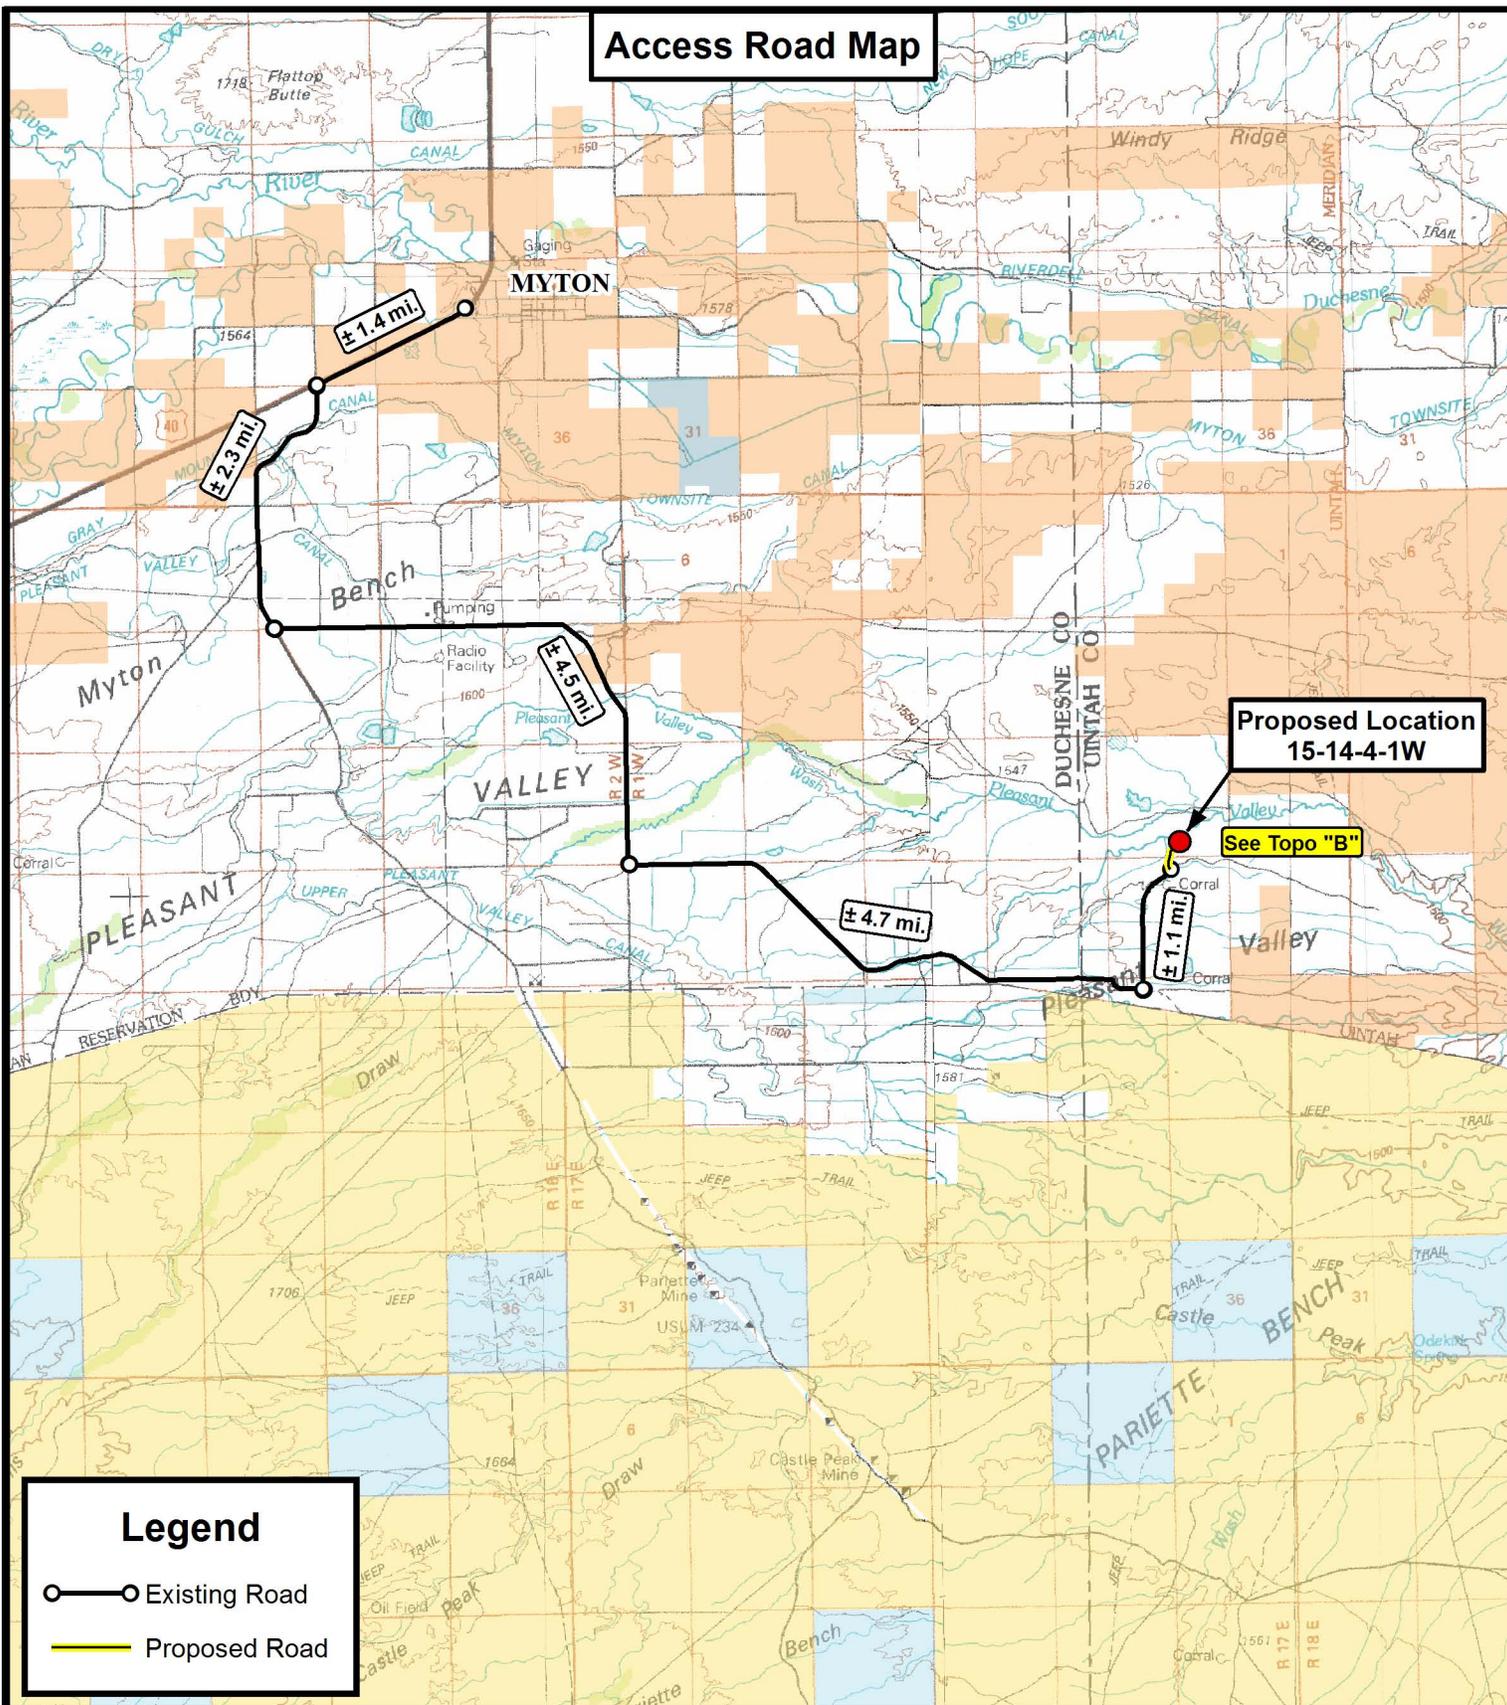

Legend

- Existing Road
- Proposed Road



Tri State Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
 F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY


15-14-4-1W
 SEC. 14, T4S, R1W, U.S.B.&M.
 Uintah County, UT.

| | | | |
|-----------|------------|----------|-----------|
| DRAWN BY: | A.P.C. | REVISED: | VERSION: |
| DATE: | 03-06-2013 | | V1 |
| SCALE: | 1:100,000 | | |

TOPOGRAPHIC MAP

SHEET **A**

Access Road Map

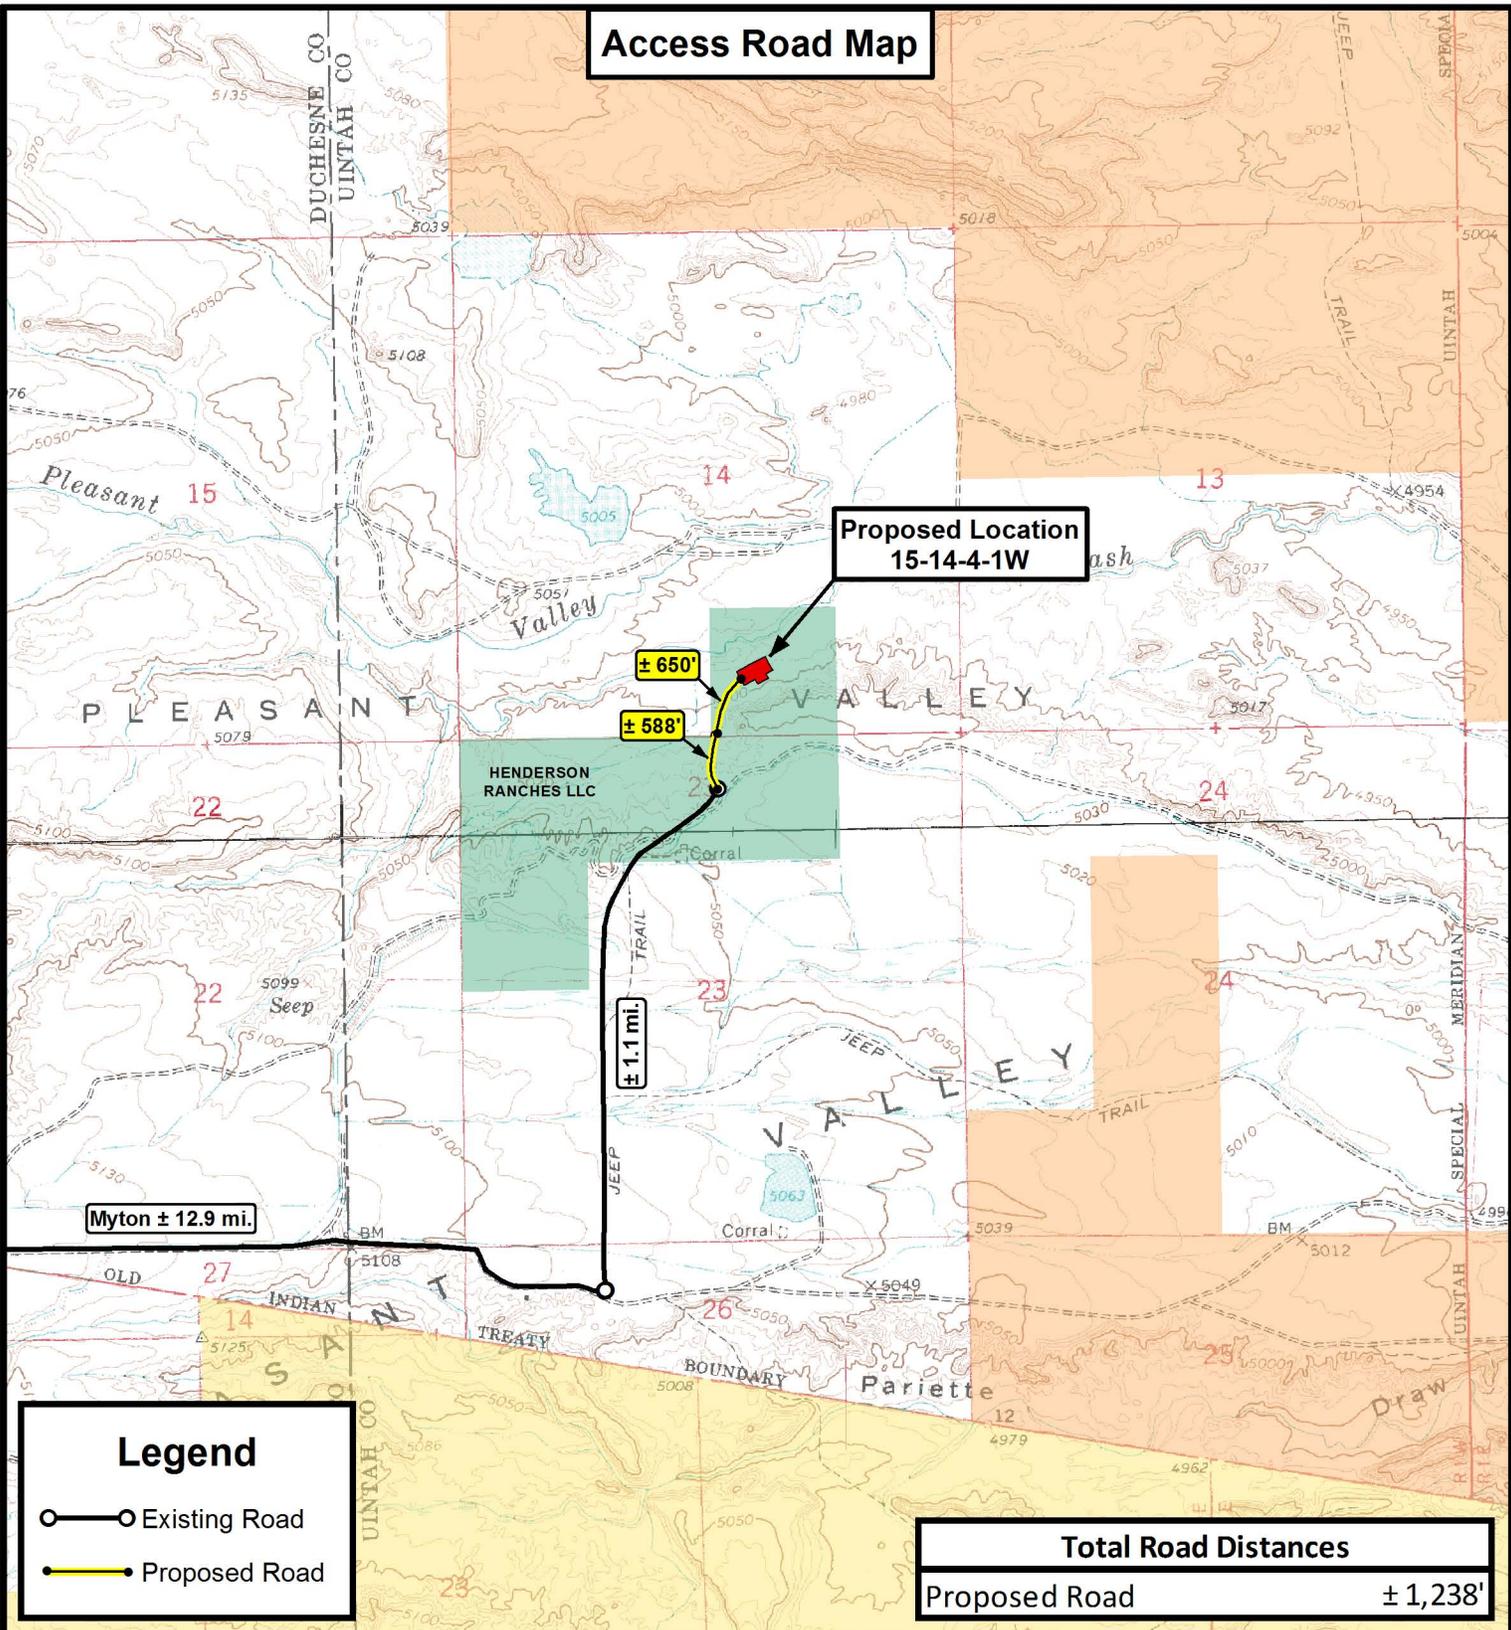

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.



**Tri State
Land Surveying, Inc.**
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY


15-14-4-1W
SEC. 14, T4S, R1W, U.S.B.&M.
Uintah County, UT.

| | | | |
|-----------|-------------|----------|----------|
| DRAWN BY: | A.P.C. | REVISED: | VERSION: |
| DATE: | 03-06-2013 | | V1 |
| SCALE: | 1" = 2,000' | | |

TOPOGRAPHIC MAP

SHEET **B**

Proposed Pipeline Map

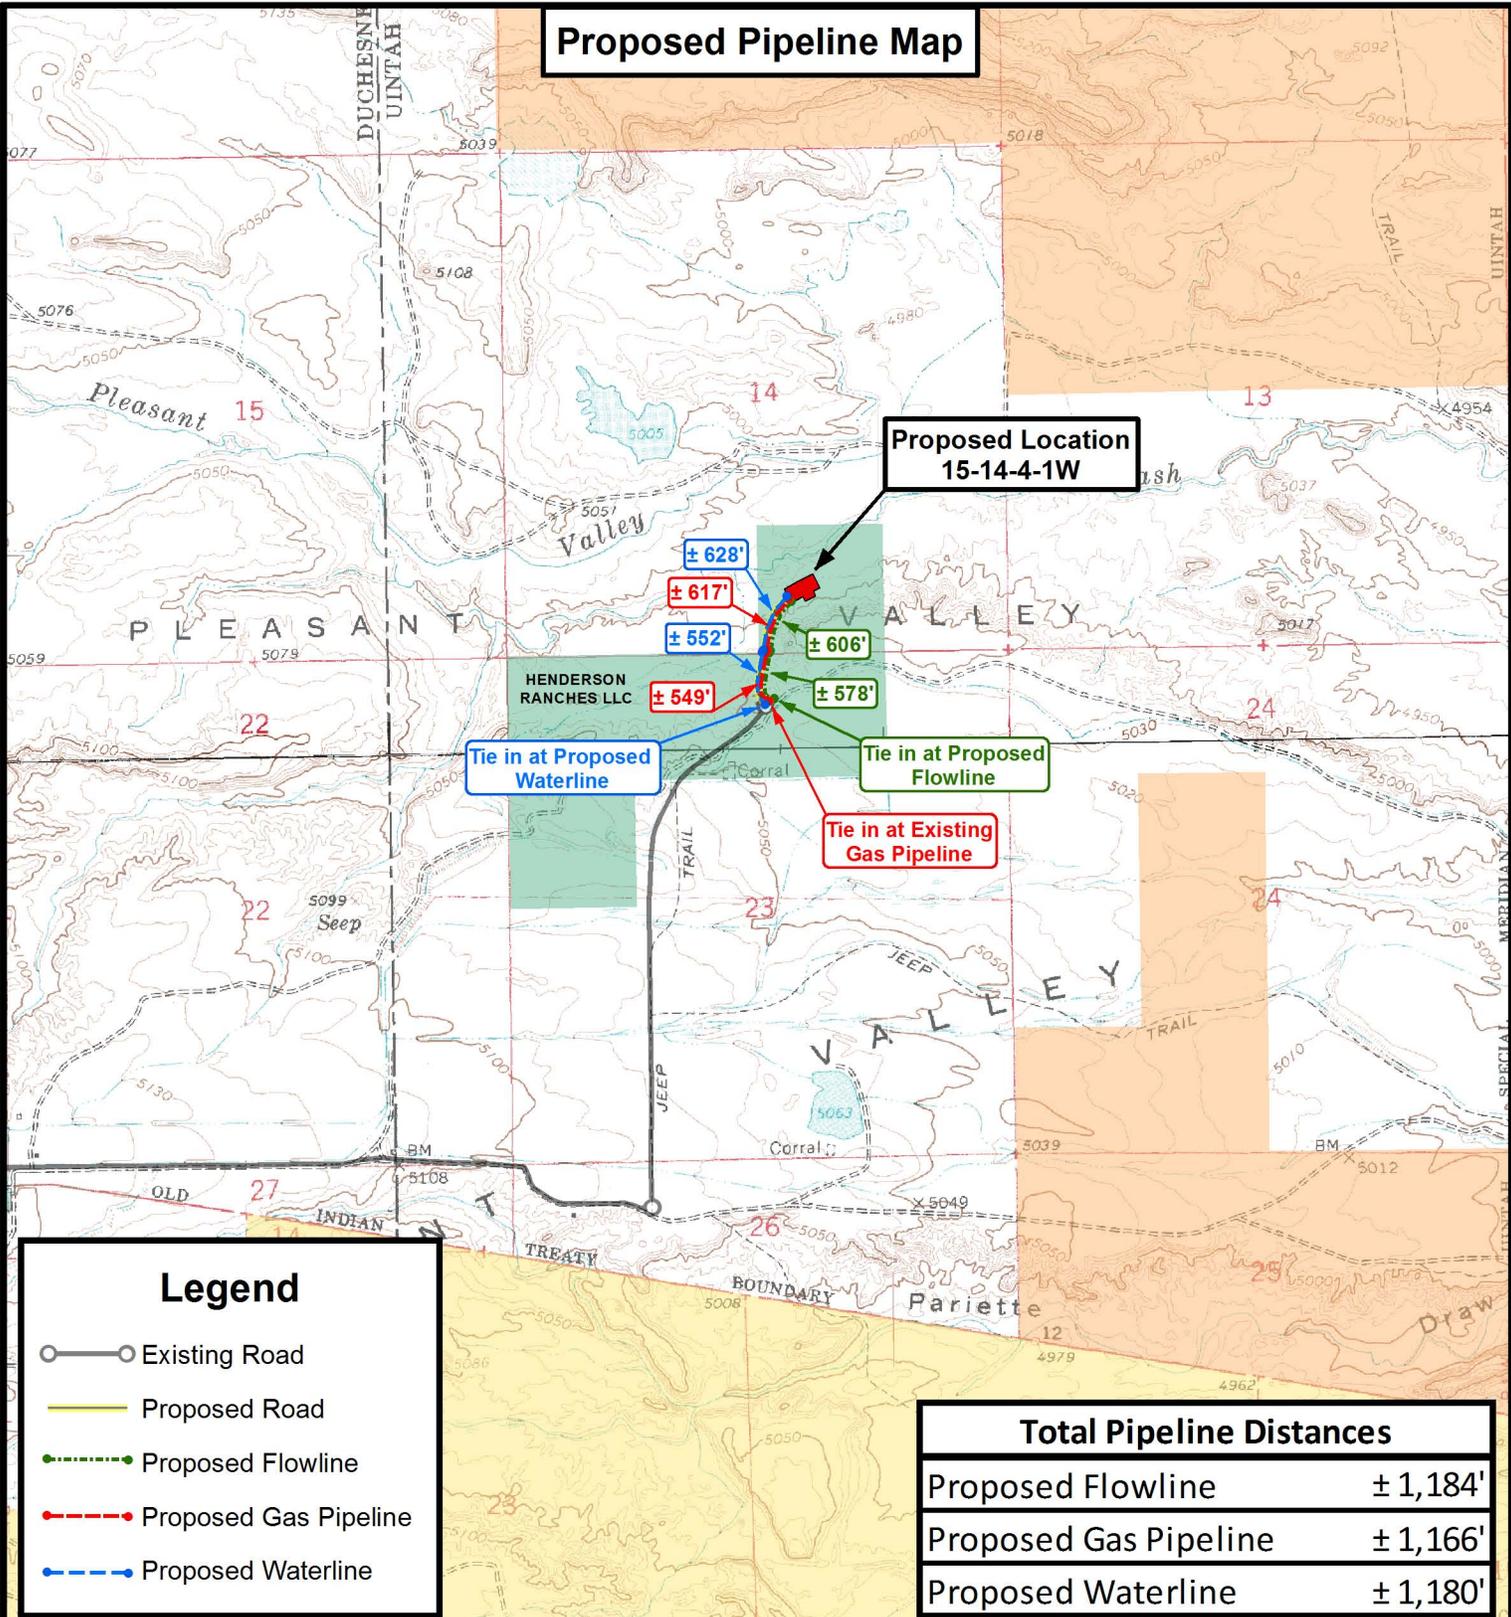

**Proposed Location
15-14-4-1W**

**Tie in at Proposed
Waterline**

**Tie in at Proposed
Flowline**

**Tie in at Existing
Gas Pipeline**

Legend

- Existing Road
- Proposed Road
- Proposed Flowline
- Proposed Gas Pipeline
- Proposed Waterline

| Total Pipeline Distances | |
|---------------------------------|----------|
| Proposed Flowline | ± 1,184' |
| Proposed Gas Pipeline | ± 1,166' |
| Proposed Waterline | ± 1,180' |

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

**Tri State
Land Surveying, Inc.**
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY
15-14-4-1W
SEC. 14, T4S, R1W, U.S.B.&M.
Uintah County, UT.


| | | | |
|-----------|-------------|----------|-----------|
| DRAWN BY: | A.P.C. | REVISED: | VERSION: |
| DATE: | 03-06-2013 | | V1 |
| SCALE: | 1" = 2,000' | | |

TOPOGRAPHIC MAP

SHEET **C**

Exhibit "B" Map

**Proposed Location
15-14-4-1W**

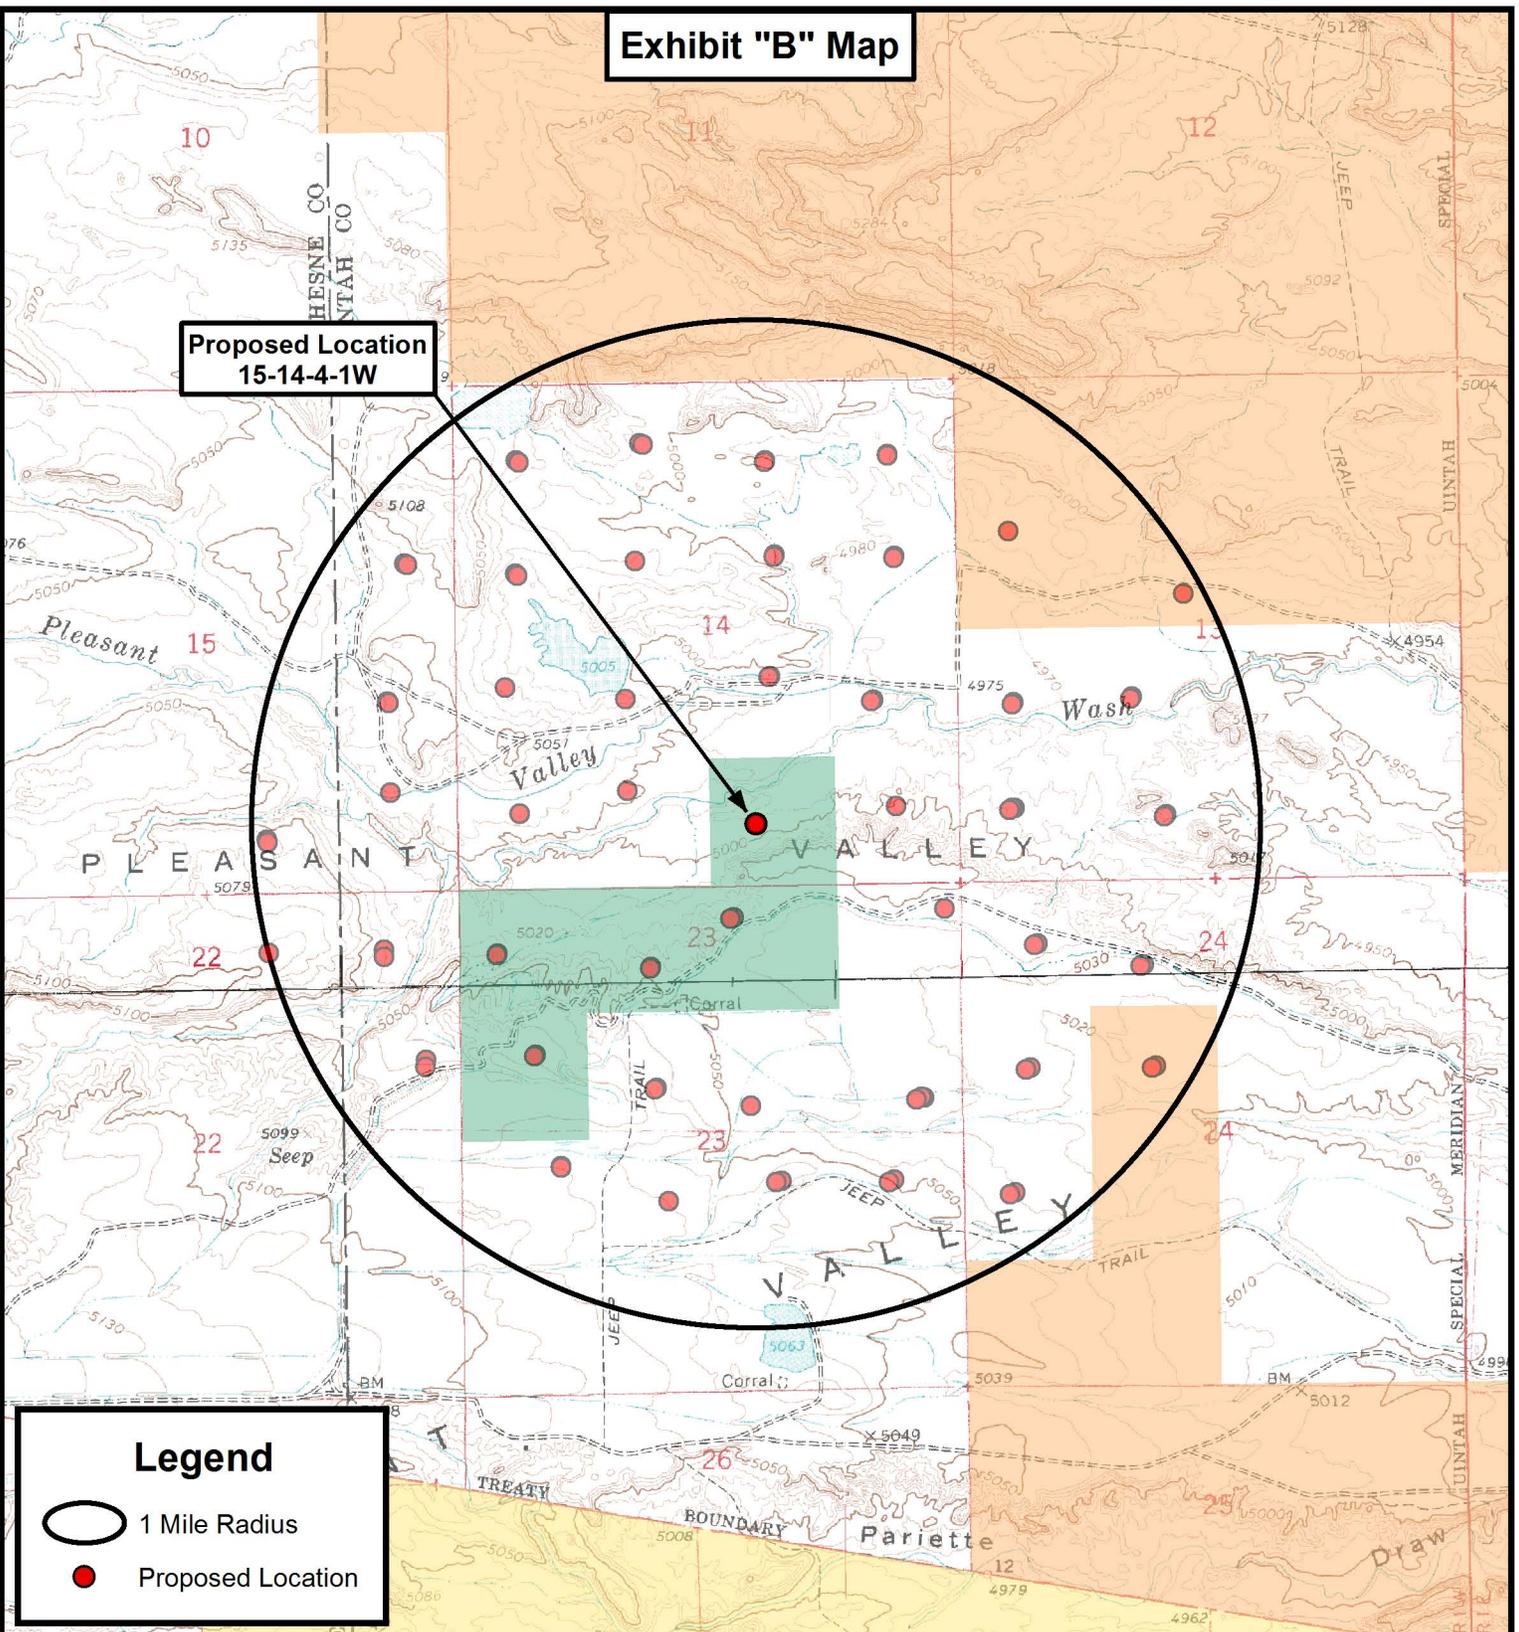

Legend


-  1 Mile Radius
-  Proposed Location

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.



**Tri State
Land Surveying, Inc.**
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

15-14-4-1W
SEC. 14, T4S, R1W, U.S.B.&M.
Uintah County, UT.

| | | | |
|-----------|-------------|----------|-----------|
| DRAWN BY: | A.P.C. | REVISED: | VERSION: |
| DATE: | 03-06-2013 | | V1 |
| SCALE: | 1" = 2,000' | | |

TOPOGRAPHIC MAP

SHEET **D**

**NEWFIELD PRODUCTION COMPANY
UTE TRIBAL 15-14-4-1W
AT SURFACE: SW/SE SECTION 14, T4S, R1W
UINTAH COUNTY, UTAH**

MULTI-POINT SURFACE USE & OPERATIONS PLAN

The onsite inspection for the proposed well pad will need to be set up. This will be a new pad with one proposed vertical well.

1. EXISTING ROADS

- a) To reach Newfield Production Company well location site Ute Tribal 15-14-4-1W, proceed southwesterly out of Myton, Utah along Highway 40 – 1.4 miles to the junction of this highway and UT State Hwy 53; proceed in a southwesterly direction –2.3 miles to it's junction with an existing road to the east; proceed in a easterly and then southerly direction approximately 4.5 miles to it's junction with an existing road to the east; proceed in a southeasterly direction approximately 4.7 miles to it's junction with an existing road to the north; proceed in a northeasterly direction approximately 1.1 miles to it's junction with the beginning of the proposed access road to the north; proceed along the proposed access road approximately 1238' to the proposed well location.
- b) The proposed location is approximately 14.2 miles southeast of Myton, Utah
- c) Existing native surface roads in the area range from clays to a sandy-clay shale material.
- d) Access roads will be maintained at the standards required by UDOT, Duchesne County or other controlling agencies. This maintenance will consist of some minor grader work for road surfacing and snow removal. Any necessary fill material for repair will be purchased and hauled from private sources.

2. PLANNED ACCESS ROAD

- a) Approximately 1,238 feet of access road trending southeast is planned. The planned access consists of entirely new disturbance across entirely private surface. See attached Topographic Map "B".
- b) The planned access road will consist of a 20-foot permanent running surface crowned and ditched in order to handle any run-off from any precipitation events. The maximum grade will be 10% or less.
- c) Adequate drainage structures, where necessary, would be incorporated into the construction of the access road to prevent soil erosion and accommodate all-weather traffic.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. LOCATION OF EXISTING WELLS

- a) Refer to Topographic Map "D".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

- a) There are no existing facilities that will be utilized.
- b) It is anticipated that this well will be a producing oil well with some associated natural gas.

- c) Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.
- d) Tank batteries will be built to Federal Gold Book specifications.
- e) All permanent above-ground structures would be painted a flat, non-reflective covert green color, to match the standard environmental colors. All facilities would be painted the designated color at the time of installation (weather permitting). Facilities required to comply with the Occupational Safety and Health Act (OSHA) may be excluded.
- f) Newfield Production Company proposes 1166' of proposed gas pipeline and 1180' of proposed buried water line. Newfield Production Company proposes 1184' of surface flow line be granted. The proposed pipeline corridor is across entirely Fee surface connecting existing pipeline corridor on Fee surface. See attached Topographic Map "C".
- g) Where parallel corridors exist the disturbed area will be 60 feet wide to allow for construction of the proposed access road and pipeline corridor. The pipeline corridor will consist of a 12-inch or smaller natural gas pipeline, a 6-inch or smaller fuel gas line and an 8-inch or smaller produced water pipeline.
- h) The pipelines will tie in to the existing Newfield pipeline infrastructure. The proposed pipelines will be buried 4-feet deep or greater in a trench constructed with a trencher, trackhoe or backhoe for the length of the proposal. The construction phase of the planned access road, proposed pipelines will last approximately (10) days.
- i) The centerline of the proposed route will be staked prior to installation. Pipelines shall be placed as close to existing roads as possible without interfering with normal road travel or road maintenance activities. Due to the proximity of existing facilities, no temporary use or construction/storage areas are anticipated.
- j) Lengths of pipe will be strung out in the borrow ditch, welded together, and rolled or dragged into place with heavy equipment. For pipelines that are installed cross-country, travel along the lines will be infrequent and for maintenance needs only. No installation activities will be performed during periods when the soil is too wet to adequately support installation equipment. If such equipment creates ruts in excess of four (4) inches deep, the soil will be deemed too wet to adequately support the equipment.

5. **LOCATION AND TYPE OF WATER SUPPLY**

- a) Newfield Production will transport water by truck from nearest water source. The available water sources are as follows:
 - Johnson Water District (Water Right : 43-7478)
 - Maurice Harvey Pond (Water Right: 47-1358)
 - Neil Moon Pond (Water Right: 43-11787)
 - Newfield Collector Well (Water Right: 47-1817 - A30414DVA, contracted with the Duchesne County Conservancy District).

6. **SOURCE OF CONSTRUCTION MATERIALS**

- a) Construction material for this access road will be borrowed material accumulated during construction of the access road. If any additional borrow or gravel is required, it would be obtained from a local supplier having a permitted source of materials within the general area.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

- a) A small pit (80 feet x 120 feet x 8 feet deep, or less) will be constructed inboard of the pad area. The pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM.
- b) The pit would be lined with 16 mil (minimum) thickness polyethylene nylon reinforced liner material. The liner(s) would overlay straw, dirt and/or bentonite if rock is encountered during excavation. The liner would overlap the pit walls and be covered with dirt and/or rocks to hold them in place. No trash, scrap pipe, or other materials that could puncture the liner would be discarded in the pit. A minimum of two feet of free board would be maintained between the maximum fluid level and the top of the pit at all times.
- c) A portable toilet will be provided for human waste.
- d) A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.
- e) After first production, if the production water meets quality guidelines, it will be transported to the Ashley, Monument Butte, Jonah, South Wells Draw and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project. Water not meeting quality criteria, will be disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), Federally approved surface disposal facilities or at a State of Utah approved surface disposal facilities.
- f) All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Newfield Production Company guarantees that during the drilling and completion of the referenced well, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the referenced well, Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

8. **ANCILLARY FACILITIES**

- a) There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT**

- a) See attached Location Layout Sheet.

Fencing Requirements

- a) All pits will be fenced or have panels installed consistent with the following minimum standards:
 1. The wire shall be no more than two (2) inches above the ground. If barbed wire is utilized it will be installed three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
 2. Corner posts shall be centered and/or braced in such a manner to keep tight and upright at all times
 3. Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- b) The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

10. PLANS FOR RESTORATION OF SURFACE:

- a) Producing Location
 1. Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.
 2. The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting; the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.
- b) Dry Hole Abandoned Location
 1. At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. SURFACE OWNERSHIP

- a) Wayne Henderson.

12. OTHER ADDITIONAL INFORMATION

- a) The Archaeological Resource Survey for this area will be forthcoming. Newfield would require that their personnel, contractors, and subcontractors to comply with Federal regulations intended to protect archeological and cultural resources.
- b) Newfield Production will control noxious weeds along rights-of-way for roads, pipelines, well sites or other applicable facilities. On federal administered land it is required that a Pesticide Use Proposal shall be submitted and given approval prior to the application of herbicides or other possible hazardous chemicals.
- c) A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Location and Reserve Pit Reclamation

Please refer to the Castle Peak and Eight Mile Flat Reclamation and Weed Management Plan.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

Representative

Name: Corie Miller
Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification



Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #15-14-4-1W, Section 14, Township 4S, Range 1W: BIA Lease #14-20-H62-6500, Uintah County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, Nationwide Bond #RLB0010462.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

7/8/13
Date

Mandie Crozier
Regulatory Analyst
Newfield Production Company

Typical 2M BOP stack configuration

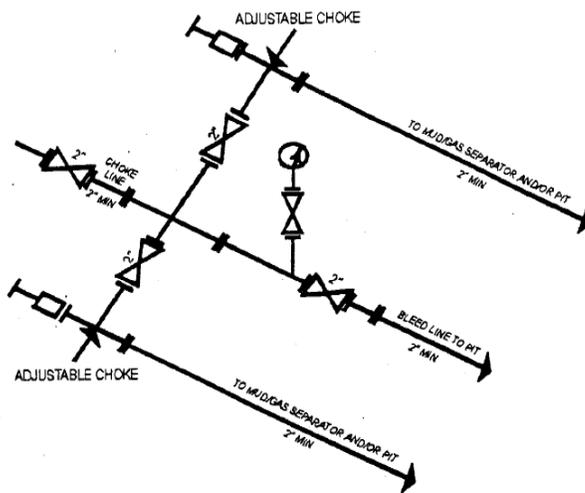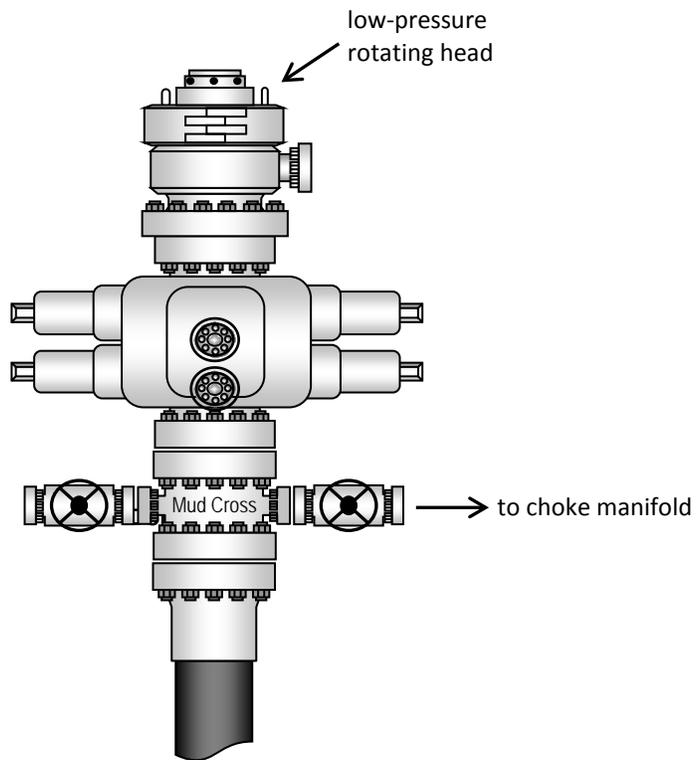





2M CHOKE MANIFOLD EQUIPMENT - CONFIGURATION OF CHOKES MAY VARY

NEWFIELD EXPLORATION COMPANY

CROSS SECTIONS

15-14-4-1W

Pad Location: SWSE Section 14, T4S, R1W, U.S.B.&M.

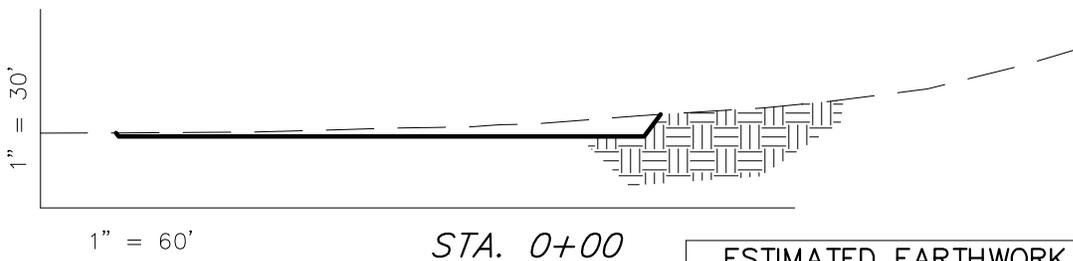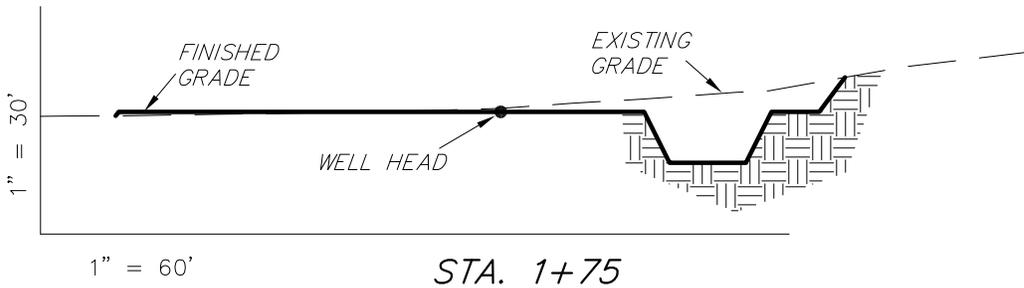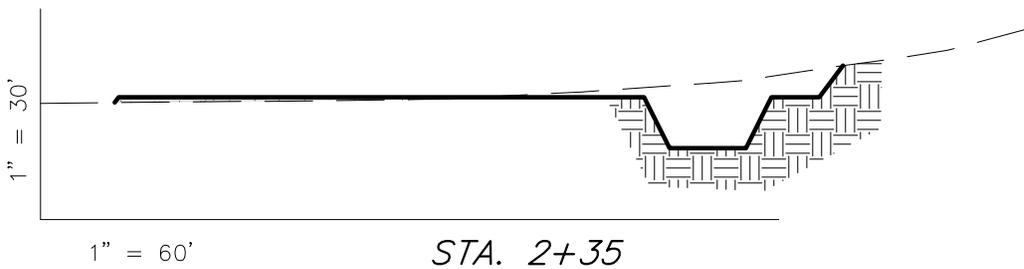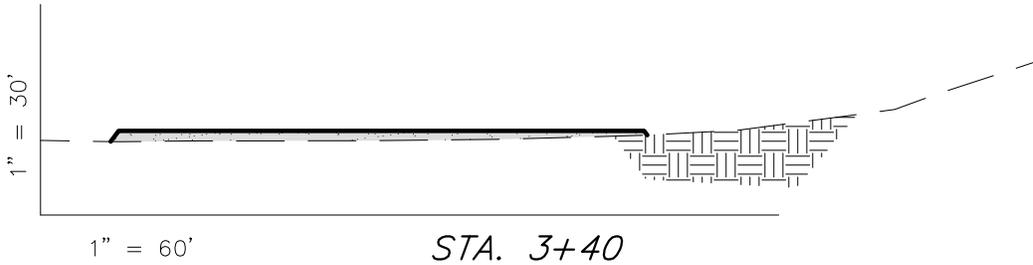

| ESTIMATED EARTHWORK QUANTITIES (No Shrink or swell adjustments have been used) (Expressed in Cubic Yards) | | | | |
|---|--------------|--------------|---|------------|
| ITEM | CUT | FILL | 6" TOPSOIL | EXCESS |
| PAD | 1,350 | 1,350 | Topsoil is not included in Pad Cut Volume | 0 |
| PIT | 690 | 0 | | 690 |
| TOTALS | 2,040 | 1,350 | 1,290 | 690 |

NOTE:
UNLESS OTHERWISE
NOTED ALL CUT/FILL
SLOPES ARE AT 1.5:1

| | | |
|-------------------|-------------------------|----------|
| SURVEYED BY: Q.M. | DATE SURVEYED: 02-13-13 | VERSION: |
| DRAWN BY: V.H. | DATE DRAWN: 02-18-13 | V1 |
| SCALE: 1" = 60' | REVISED: | |


Tri State (435) 781-2501
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD EXPLORATION COMPANY

TYPICAL RIG LAYOUT

15-14-4-1W

Pad Location: SWSE Section 14, T4S, R1W, U.S.B.&M.

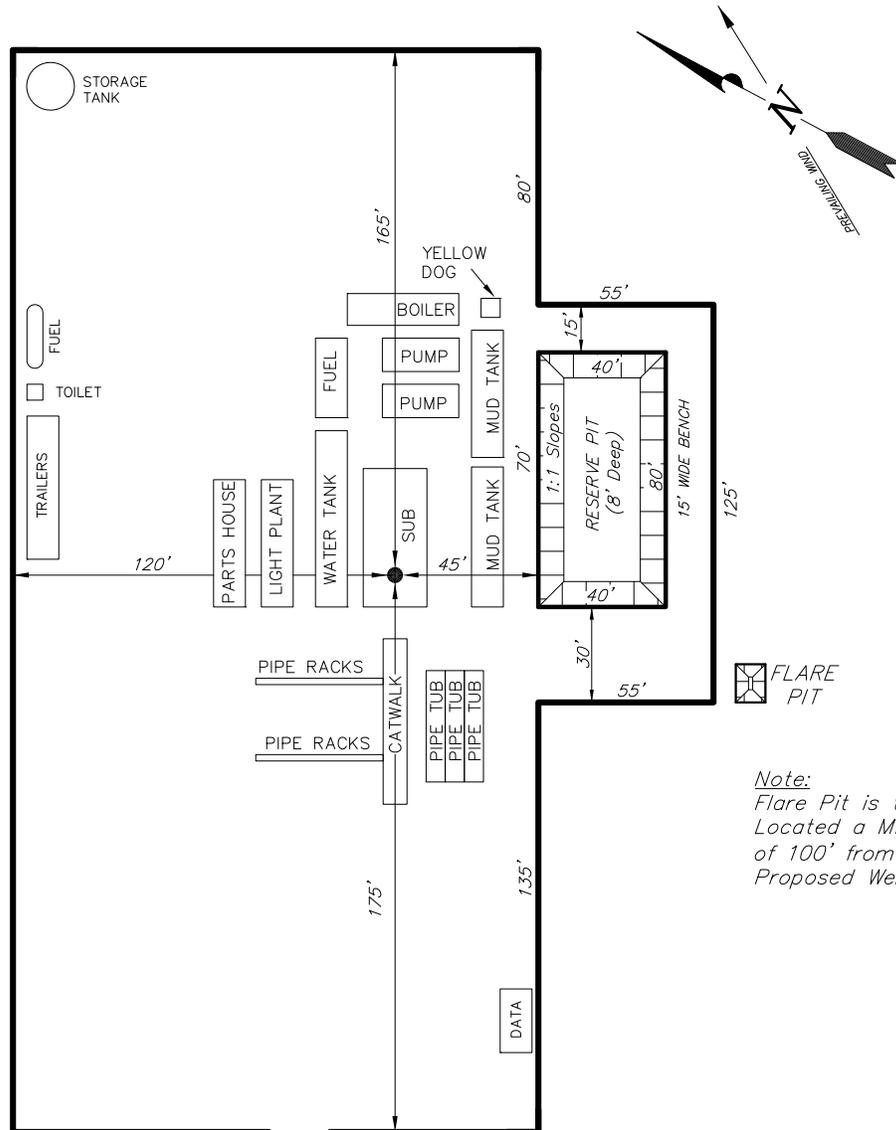

FLARE PIT

Note:
Flare Pit is to be
Located a Minimum
of 100' from the
Proposed Well Head.

PROPOSED ACCESS ROAD (Max. 6% Grade)

| | | |
|-------------------|-------------------------|----------|
| SURVEYED BY: Q.M. | DATE SURVEYED: 02-13-13 | VERSION: |
| DRAWN BY: V.H. | DATE DRAWN: 02-18-13 | V1 |
| SCALE: 1" = 60' | REVISED: | |


Tri State (435) 781-2501
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD EXPLORATION COMPANY

RECLAMATION LAYOUT

15-14-4-1W

Pad Location: SWSE Section 14, T4S, R1W, U.S.B.&M.

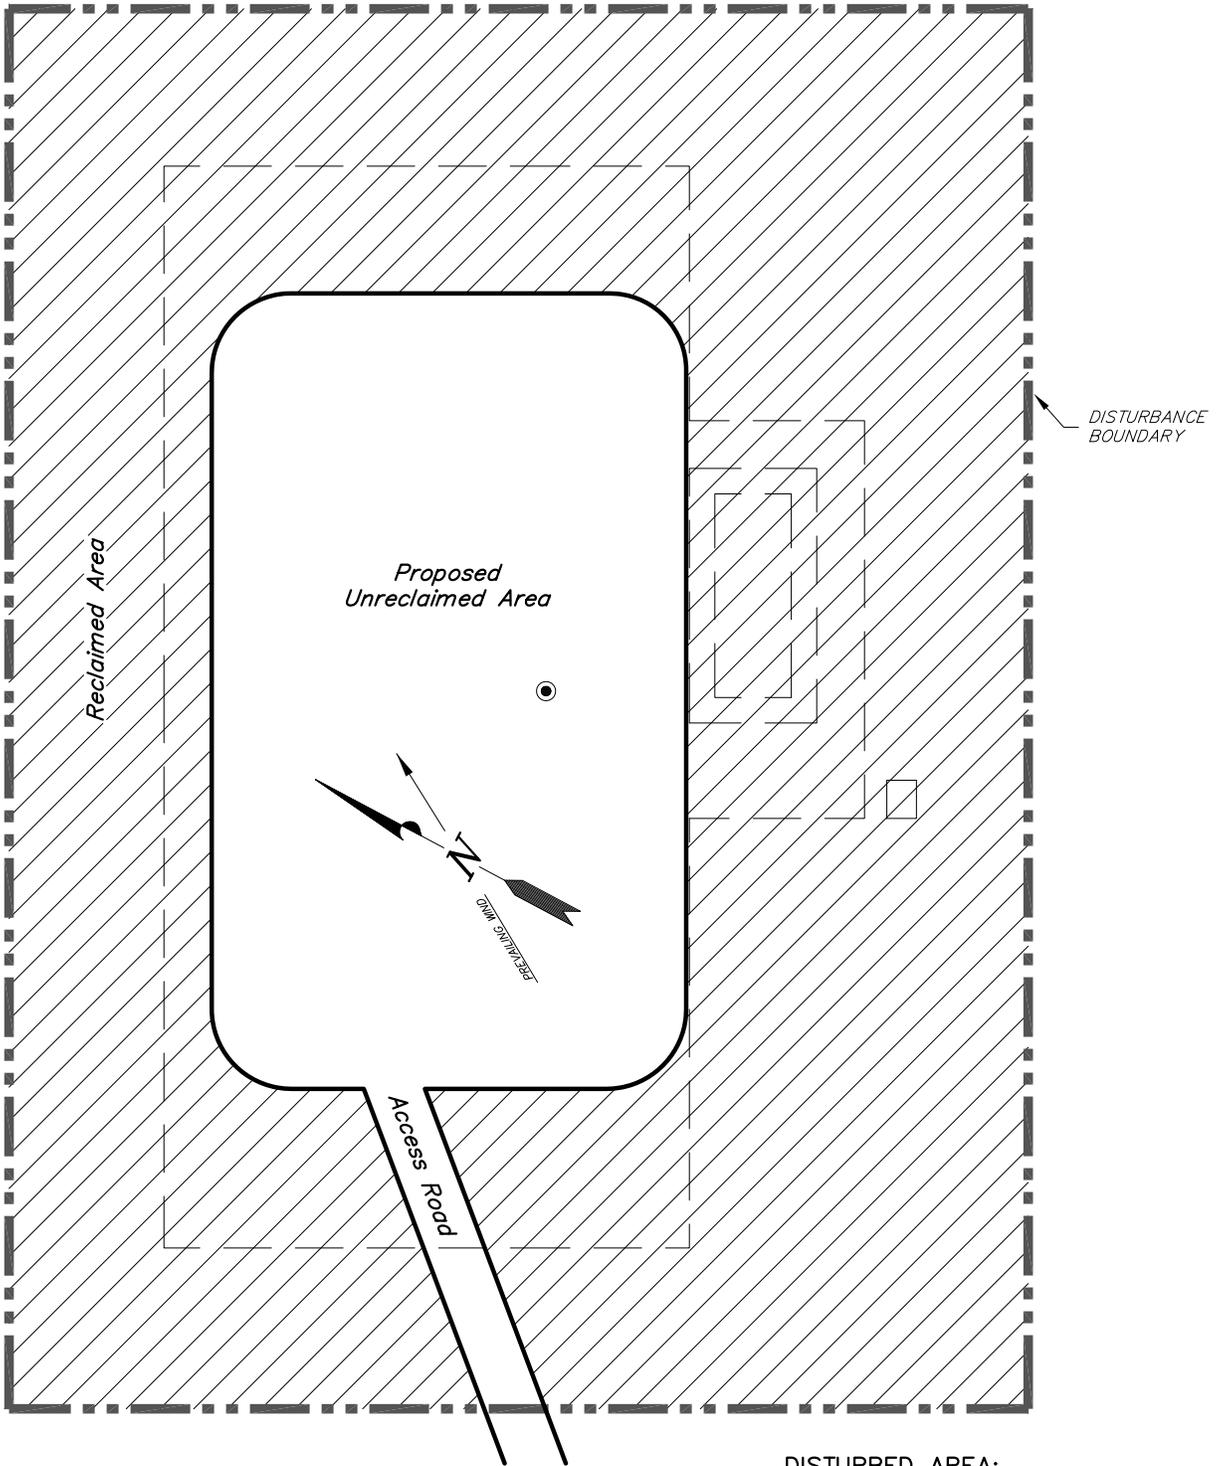

Notes:

1. Reclaimed Area to Include Seeding of Approved Vegetation and Sufficient Storm Water Management System.
2. Actual Equipment Layout and Reclaimed Pad Surface Area May Change due to Production Requirements or Site Conditions.

DISTURBED AREA:

TOTAL DISTURBED AREA = 3.23 ACRES
 TOTAL RECLAIMED AREA = 2.34 ACRES
 UNRECLAIMED AREA = 0.89 ACRES

| | | |
|-------------------|-------------------------|----------|
| SURVEYED BY: Q.M. | DATE SURVEYED: 02-13-13 | VERSION: |
| DRAWN BY: V.H. | DATE DRAWN: 02-18-13 | V1 |
| SCALE: 1" = 60' | REVISED: | |

Tri State
Land Surveying, Inc.

180 NORTH VERNAL AVE. VERNAL, UTAH 84078


(435) 781-2501

NEWFIELD EXPLORATION COMPANY

PROPOSED SITE FACILITY DIAGRAM

15-14-4-1W EDA-20G0005609

*Pad Location: SWSE Section 14, T4S, R1W, U.S.B.&M.
Uintah County, Utah*

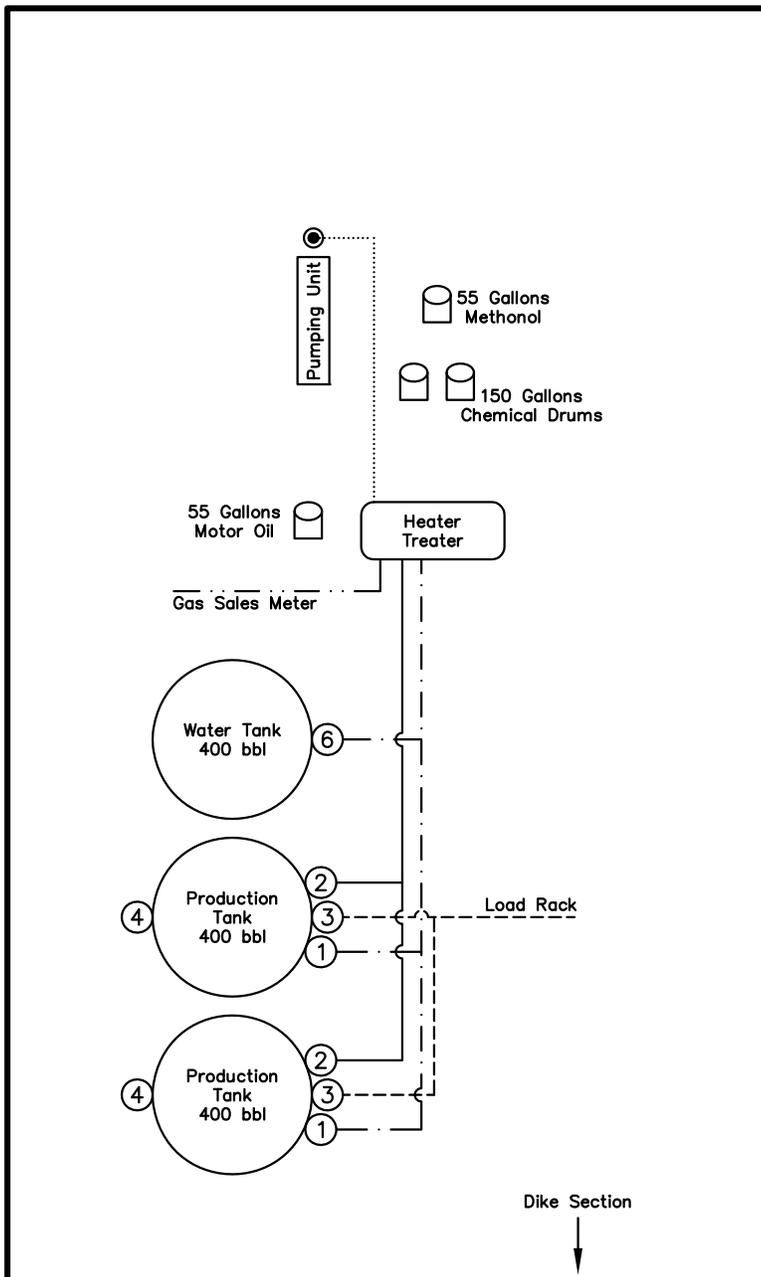

Legend

| | |
|---------------|---------------|
| Emulsion Line | |
| Load Rack | ----- |
| Water Line | - . - . - . - |
| Gas Sales | - - |
| Oil Line | _____ |

NOT TO SCALE

| | | |
|-------------------|-------------------------|-------------|
| SURVEYED BY: Q.M. | DATE SURVEYED: 02-13-13 | VERSION: V1 |
| DRAWN BY: V.H. | DATE DRAWN: 02-18-13 | |
| SCALE: NONE | REVISED: | |

Tri State
Land Surveying, Inc.

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

(435) 781-2501

AFFIDAVIT OF EASEMENT, RIGHT-OF-WAY AND SURFACE USE AGREEMENT

Peter Burns personally appeared before me, being duly sworn, deposes and with respect to State of Utah R649-3-34.7 says:

1. My name is Peter Burns. I am a Landman for Newfield Production Company, whose address is 1001 17th Street, Suite 2000, Denver, CO 80202 (“Newfield”).
2. Newfield is the Operator of the proposed UT 15-14-4-1W well with a surface location to be positioned in the SWSE of Section 14, Township 4 South, Range 1 West, Uintah County, Utah (the “Drillsite Location”). The surface owner of the Drillsite Location is Henderson Ranches, LLC, whose address is Route 3, Box 3671, Myton, UT 84052 (“Surface Owner”).
3. Newfield and the Surface Owner have agreed upon an Easement, Right-of-Way and Surface Use Agreement dated July 12, 2013 covering the Drillsite Location and access to the Drillsite Location.

FURTHER AFFIANT SAYETH NOT.

Peter Burns


ACKNOWLEDGEMENT

| | |
|-------------------|---|
| STATE OF COLORADO | § |
| | § |
| COUNTY OF DENVER | § |

Before me, a Notary Public, in and for the State, on this 15th day of July, 2013, personally appeared Peter Burns, to me known to be the identical person who executed the foregoing instrument, and acknowledged to me that he executed the same as his own free and voluntary act and deed for the uses and purposes therein set forth.


NOTARY PUBLIC

My Commission Expires: 12.14.15




API Number: 4304753888
Well Name: Ute Tribal 15-14-4-1W
Township T04.0S Range R01.0W Section 14
Meridian: UBM
 Operator: NEWFIELD PRODUCTION COMPANY

Map Prepared:
 Map Produced by Diana Mason

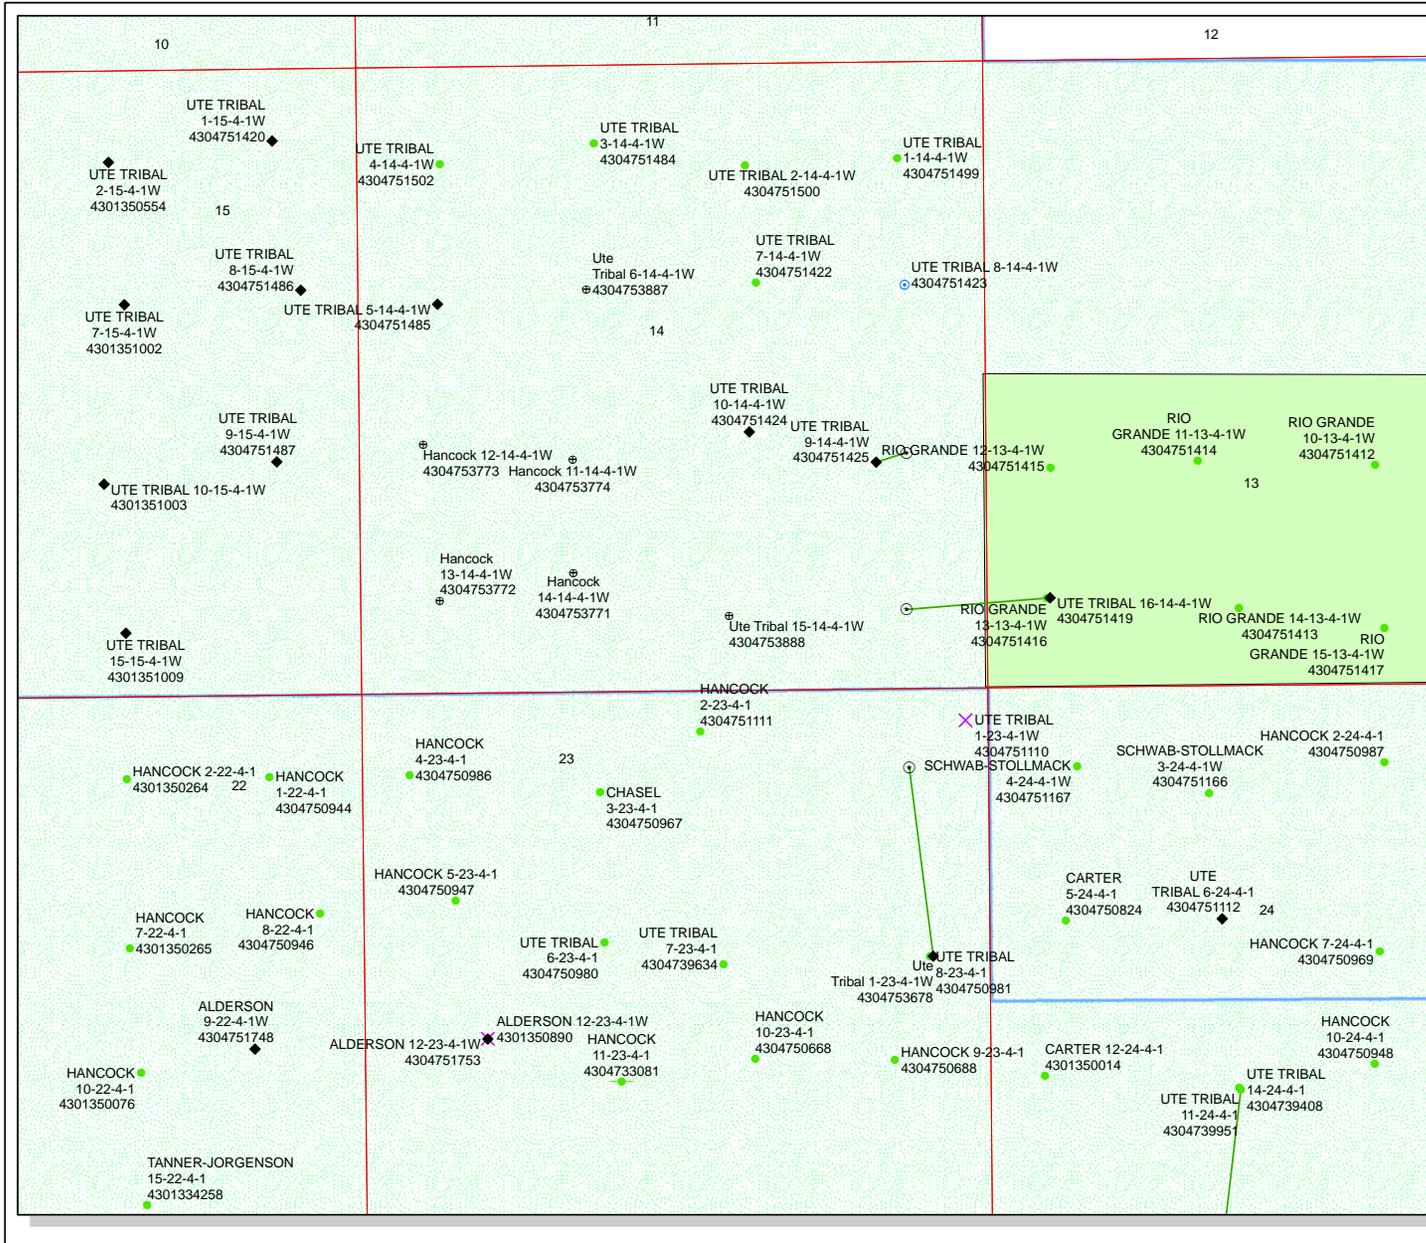

- Units STATUS**
- ACTIVE
 - EXPLORATORY
 - GAS STORAGE
 - NF PP OIL
 - NF SECONDARY
 - PI OIL
 - PP GAS
 - PP GEOTHERM
 - PP OIL
 - SECONDARY
 - TERMINATED



ON-SITE PREDRILL EVALUATION

Utah Division of Oil, Gas and Mining

Operator NEWFIELD PRODUCTION COMPANY
Well Name Ute Tribal 15-14-4-1W
API Number 43047538880000 **APD No** 8256 **Field/Unit** WILKIN RIDGE
Location: 1/4,1/4 SWSE **Sec 14** **Tw 4.0S** **Rng 1.0W** 628 FSL 2157 FEL
GPS Coord (UTM) 588445 4442643 **Surface Owner** Wayne and Moreen Henderson

Participants

Corie Miller, Mandie Crozier, Shannon Chollett -NFX; Sheri Woodsong - BLM

Regional/Local Setting & Topography

This location is in the Pleasant Valley area in Uintah County Just north of the farmlands more commonly considered Pleasant Valley between Windy Ridge and the Parriette Basin. The town of Myton can be found about 10 miles Northwest. Most of the region is productive irrigated farmland with a number of streams and small ponds common. The streams and washes are deeply incised as the soils are generally highly erodible and comprised mostly of clays. Locally, the site and very nearby acreages are comprised of light colored clays on what may have once been a playa and against a small butte to the South. The Henderson's irrigate the lands immediately adjacent West and a year round stream with Riparian vegetation is found immediately North bordering both 1/4 1/4 section pieces. This location generally slopes North toward the stream and has an ephemeral drainage that needs to be diverted around location. The location is heavily vegetated with tall greasewood

Surface Use Plan

Current Surface Use
Wildlfe Habitat

| New Road Miles | Well Pad | Src Const Material | Surface Formation |
|-------------------|-------------------------|--------------------|-------------------|
| 0.234 | Width 300 Length 400 | Onsite | UNTA |

Ancillary Facilities

Waste Management Plan Adequate?

Environmental Parameters

Affected Floodplains and/or Wetlands N

Flora / Fauna

High desert shrubland ecosystem. Expected vegetation consists of black sagebrush, shadscale, Atriplex spp., mustard spp, rabbit brush, horsebrush, broom snakeweed, Opuntia spp and spring annuals.

Dominant vegetation;
greasewood and opuntia

Wildlife;

Adjacent habitat contains forbs that may be suitable browse for deer, antelope, prairie dogs or rabbits, though none were observed.

Soil Type and Characteristics

light colored clays

Erosion Issues Y**Sedimentation Issues** Y**Site Stability Issues** N**Drainage Diversion Required?** Y**Berm Required?** Y**Erosion Sedimentation Control Required?** N**Paleo Survey Run?** N **Paleo Potential Observed?** N **Cultural Survey Run?** N **Cultural Resources?** N**Reserve Pit****Site-Specific Factors****Site Ranking**

| | | |
|--|------------------|----|
| Distance to Groundwater (feet) | 75 to 100 | 10 |
| Distance to Surface Water (feet) | 100 to 200 | 15 |
| Dist. Nearest Municipal Well (ft) | >5280 | 0 |
| Distance to Other Wells (feet) | >1320 | 0 |
| Native Soil Type | Mod permeability | 10 |
| Fluid Type | Fresh Water | 5 |
| Drill Cuttings | Normal Rock | 0 |
| Annual Precipitation (inches) | 10 to 20 | 5 |
| Affected Populations | | |
| Presence Nearby Utility Conduits | Not Present | 0 |
| Final Score | | 45 |

1 Sensitivity Level

Characteristics / Requirements

Pit to be dug to a depth of 8'. Because of the likely hood of disturbance to existing sandstone bedrock observed on the surface, pit underlayment is to be used to protect the liner from potential puncture. Pit should be fenced to prevent entry by deer, other wildlife and domestic animals. Pit to be closed within one year after drilling activities are complete

Closed Loop Mud Required? N **Liner Required?** Y **Liner Thickness** 16 **Pit Underlayment Required?** Y**Other Observations / Comments**Chris Jensen
Evaluator7/31/2013
Date / Time

Application for Permit to Drill Statement of Basis

Utah Division of Oil, Gas and Mining

| APD No | API WellNo | Status | Well Type | Surf Owner | CBM |
|------------------|--|--------|------------------------------|-------------------------------|-----|
| 8256 | 43047538880000 | LOCKED | OW | P | No |
| Operator | NEWFIELD PRODUCTION COMPANY | | Surface Owner-APD | Wayne and Moreen Henderson | |
| Well Name | Ute Tribal 15-14-4-1W | | Unit | | |
| Field | WILKIN RIDGE | | Type of Work | DRILL | |
| Location | SWSE 14 4S 1W U 628 FSL 2157 FEL GPS Coord (UTM) 588437E 4442640N | | | | |

Geologic Statement of Basis

The mineral rights for the proposed well are owned by the Ute Tribe. The BLM will be the agency responsible for evaluating and approving the drilling, casing and cement programs.

Brad Hill
APD Evaluator

8/19/2013
Date / Time

Surface Statement of Basis

Location is proposed in a good location within the spacing window. Access road enters the pad from the West. The landowner was not in attendance for the pre-site inspection. The soil type and topography at present do combine to pose a threat to erosion or sediment/ pollution transport in these regional climate conditions. Usual construction standards of the Operator appear to be adequate for the proposed purpose as submitted provided something is constructed to divert the drainage. I recognize no special flora or animal species or cultural resources on site that the proposed action may harm. A riparian area (stream) leading to a small pond can be found adjacent the site to the North. The location was not previously surveyed for cultural and paleontological resources as the operator saw fit. I have advised the operator take all measures necessary to comply with ESA and MBTA and that actions insure no disturbance to species that may have not been seen during onsite visit. The location should be bermed to prevent fluids from entering or leaving the confines of the pad particularly considering location slopes toward stream. Fencing around the reserve pit will be necessary to prevent wildlife and livestock from entering. A synthetic liner of 16 mils (minimum) should be utilized in the reserve pit. Measures (BMP's) shall be taken to protect steep slopes and topsoil pile from erosion, sedimentation and stability issues.

Chris Jensen
Onsite Evaluator

7/31/2013
Date / Time

Conditions of Approval / Application for Permit to Drill

| Category | Condition |
|----------|---|
| Pits | A synthetic liner with a minimum thickness of 16 mils with a felt subliner shall be properly installed and maintained in the reserve pit. |
| Surface | The well site shall be bermed to prevent fluids from leaving the pad. Location slopes toward stream adjacent pad. |
| Surface | Drainages adjacent to the proposed pad shall be diverted around the location. |
| Surface | The reserve pit shall be fenced upon completion of drilling operations. |

API Well Number: 43047538880000

Surface Measures (BMP's) shall be taken to protect steep slopes and topsoil pile from erosion, sedimentation and stability issues.

RECEIVED: August 21, 2013

WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 7/9/2013

API NO. ASSIGNED: 43047538880000

WELL NAME: Ute Tribal 15-14-4-1W

OPERATOR: NEWFIELD PRODUCTION COMPANY (N2695)

PHONE NUMBER: 435 646-4825

CONTACT: Mandie Crozier

PROPOSED LOCATION: SWSE 14 040S 010W

Permit Tech Review:

SURFACE: 0628 FSL 2157 FEL

Engineering Review:

BOTTOM: 0628 FSL 2157 FEL

Geology Review:

COUNTY: UINTAH

LATITUDE: 40.12944

LONGITUDE: -109.96199

UTM SURF EASTINGS: 588437.00

NORTHINGS: 4442640.00

FIELD NAME: WILKIN RIDGE

LEASE TYPE: 2 - Indian

LEASE NUMBER: 14-20-H62-6500

PROPOSED PRODUCING FORMATION(S): GREEN RIVER

SURFACE OWNER: 4 - Fee

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

- PLAT
- Bond: INDIAN - RLB0010462
- Potash
- Oil Shale 190-5
- Oil Shale 190-3
- Oil Shale 190-13
- Water Permit: 437478
- RDCC Review:
- Fee Surface Agreement
- Intent to Commingle

Commingle Approved

LOCATION AND SITING:

- R649-2-3.
- Unit:
- R649-3-2. General
- R649-3-3. Exception
- Drilling Unit
- Board Cause No: R649-3-2
- Effective Date:
- Siting:
- R649-3-11. Directional Drill

Comments: Presite Completed

Stipulations: 4 - Federal Approval - dmason
5 - Statement of Basis - bhll
23 - Spacing - dmason



GARY R. HERBERT
Governor

GREGORY S. BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: Ute Tribal 15-14-4-1W

API Well Number: 43047538880000

Lease Number: 14-20-H62-6500

Surface Owner: FEE (PRIVATE)

Approval Date: 8/21/2013

Issued to:

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

Authority:

Pursuant to Utah Code Ann. 40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of R649-3-2. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

Compliance with the Conditions of Approval/Application for Permit to Drill

outlined in the Statement of Basis (copy attached).

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well - contact Carol Daniels at 801-538-5284

(please leave a voicemail message if not available)

OR

submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website

at <http://oilgas.ogm.utah.gov>

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) - due within 5 days of spudding the well
- Monthly Status Report (Form 9) - due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) - due prior to implementation
- Written Notice of Emergency Changes (Form 9) - due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) - due prior to implementation
- Report of Water Encountered (Form 7) - due within 30 days after completion
- Well Completion Report (Form 8) - due within 30 days after completion or plugging

Approved By:



For John Rogers
Associate Director, Oil & Gas

| | |
|--|--|
| STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING | FORM 9 |
| SUNDRY NOTICES AND REPORTS ON WELLS | |
| Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals. | |
| 1. TYPE OF WELL Oil Well | 5. LEASE DESIGNATION AND SERIAL NUMBER: 14-20-H62-6500 |
| 2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY | 6. IF INDIAN, ALLOTTEE OR TRIBE NAME: |
| 3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052 | 7. UNIT or CA AGREEMENT NAME: |
| PHONE NUMBER: 435 646-4825 Ext | 8. WELL NAME and NUMBER: Ute Tribal 15-14-4-1W |
| 4. LOCATION OF WELL FOOTAGES AT SURFACE: 0628 FSL 2157 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSE Section: 14 Township: 04.0S Range: 01.0W Meridian: U | 9. API NUMBER: 43047538880000 |
| | 9. FIELD and POOL or WILDCAT: WINDY RIDGE |
| | COUNTY: UINTAH |
| | STATE: UTAH |

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

| TYPE OF SUBMISSION | TYPE OF ACTION | | |
|--|--|---|---|
| <input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 8/21/2014 | <input type="checkbox"/> ACIDIZE | <input type="checkbox"/> ALTER CASING | <input type="checkbox"/> CASING REPAIR |
| <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: | <input type="checkbox"/> CHANGE TO PREVIOUS PLANS | <input type="checkbox"/> CHANGE TUBING | <input type="checkbox"/> CHANGE WELL NAME |
| <input type="checkbox"/> SPUD REPORT Date of Spud: | <input type="checkbox"/> CHANGE WELL STATUS | <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS | <input type="checkbox"/> CONVERT WELL TYPE |
| <input type="checkbox"/> DRILLING REPORT Report Date: | <input type="checkbox"/> DEEPEN | <input type="checkbox"/> FRACTURE TREAT | <input type="checkbox"/> NEW CONSTRUCTION |
| | <input type="checkbox"/> OPERATOR CHANGE | <input type="checkbox"/> PLUG AND ABANDON | <input type="checkbox"/> PLUG BACK |
| | <input type="checkbox"/> PRODUCTION START OR RESUME | <input type="checkbox"/> RECLAMATION OF WELL SITE | <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION |
| | <input type="checkbox"/> REPERFORATE CURRENT FORMATION | <input type="checkbox"/> SIDETRACK TO REPAIR WELL | <input type="checkbox"/> TEMPORARY ABANDON |
| | <input type="checkbox"/> TUBING REPAIR | <input type="checkbox"/> VENT OR FLARE | <input type="checkbox"/> WATER DISPOSAL |
| | <input type="checkbox"/> WATER SHUTOFF | <input type="checkbox"/> SI TA STATUS EXTENSION | <input checked="" type="checkbox"/> APD EXTENSION |
| | <input type="checkbox"/> WILDCAT WELL DETERMINATION | <input type="checkbox"/> OTHER | OTHER: <input style="width: 100px;" type="text"/> |

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield proposes to extend the Application for Permit to Drill this well.

Approved by the
August 19, 2014
Oil, Gas and Mining

Date: _____
By:

| | | |
|--|-------------------------------------|---------------------------------|
| NAME (PLEASE PRINT) Mandie Crozier | PHONE NUMBER 435 646-4825 | TITLE Regulatory Tech |
| SIGNATURE N/A | DATE 8/18/2014 | |



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047538880000

API: 43047538880000

Well Name: Ute Tribal 15-14-4-1W

Location: 0628 FSL 2157 FEL QTR SWSE SEC 14 TWNP 040S RNG 010W MER U

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 8/21/2013

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

Signature: Mandie Crozier

Date: 8/18/2014

Title: Regulatory Tech Representing: NEWFIELD PRODUCTION COMPANY

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

AUG 15 2013

APPLICATION FOR PERMIT TO DRILL OR REENTER

BLM Vernal UT

CONFIDENTIAL

| | | |
|--|--|--|
| 1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER | | 5. Lease Serial No. 1420H626500 |
| 1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone | | 6. Indian, Allottee or Tribe Name |
| 2. Name of Operator NEWFIELD EXPLORATION Contact: MANDIE CROZIER E-Mail: mcrozier@newfield.com | | 7. If Unit or CA Agreement, Name and No. |
| 3a. Address ROUTE #3 BOX 3630 MYTON, UT 84052 | | 8. Lease Name and Well No. UTE TRIBAL 15-14-4-1W |
| 3b. Phone No. (include area code) Ph: 435-646-4825 Fx: 435-646-3031 | | 9. API Well No. 4304753888 |
| 4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SWSE 628FSL 2157FEL At proposed prod. zone SWSE 628FSL 2157FEL | | 10. Field and Pool, or Exploratory UNDESIGNATED |
| 14. Distance in miles and direction from nearest town or post office* 14.2 MILES SOUTHEAST OF MYTON, UT | | 11. Sec., T., R., M., or Blk. and Survey or Area Sec 14 T4S R1W Mer UBM |
| 15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 483' | 16. No. of Acres in Lease 480.00 | 12. County or Parish UINTAH |
| 17. Spacing Unit dedicated to this well 40.00 | 13. State UT | 17. Spacing Unit dedicated to this well |
| 18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 1320' | 19. Proposed Depth 7135 MD 7135 TVD | 20. BLM/BIA Bond No. on file RLB00100462 |
| 21. Elevations (Show whether DF, KB, RT, GL, etc.) 4995 GL | 22. Approximate date work will start 01/01/2014 | 23. Estimated duration 7 DAYS |

RECEIVED
AUG 25 2014

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form: **DIV. OF OIL, GAS & MINING**

- | | |
|--|--|
| <ul style="list-style-type: none"> 1. Well plat certified by a registered surveyor. 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | <ul style="list-style-type: none"> 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 5. Operator certification 6. Such other site specific information and/or plans as may be required by the authorized officer. |
|--|--|

| | | |
|--|---|----------------------------|
| 25. Signature (Electronic Submission) | Name (Printed/Typed) MANDIE CROZIER Ph: 435-646-4825 | Date 08/15/2013 |
| Title REGULATORY ANALYST | | |
| Approved by (Signature) | Name (Printed/Typed) Jerry Kenczka | Date AUG 11 2014 |
| Title Office | | |

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**Electronic Submission #217111 verified by the BLM Well Information System
For NEWFIELD EXPLORATION, sent to the Vernal
Committed to AFMSS for processing by LESLIE BUHLER on 08/22/2013 ()**

UDOGM



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: Newfield Production Company
Well No: UTE TRIBAL 15-14-4-1W
API No: 43-047-53888

Location: SWSE, Sec. 14, T4S, R1W
Lease No: 14-20-H62-6500
Agreement: N/A

OFFICE NUMBER: (435) 781-4400

OFFICE FAX NUMBER: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Construction Activity
(Notify Ute Tribe Energy & Minerals
Dept. and BLM Environmental
Scientist)

- The Ute Tribe Energy & Minerals Dept. and BLM Environmental Scientist shall be notified at least 48 hours in advance of any construction activity. The Ute Tribal office is open Monday through Thursday.

Construction Completion
(Notify Ute Tribe Energy & Minerals
Dept. and BLM Environmental
Scientist)

- Upon completion of the pertinent APD/ROW construction, notify the Ute Tribe Energy & Minerals Dept. for a Tribal Technician to verify the Affidavit of Completion. Notify the BLM Environmental Scientist prior to moving on the drilling rig.

Spud Notice
(Notify BLM Petroleum Engineer)

- Twenty-Four (24) hours prior to spudding the well.

Casing String & Cementing
(Notify BLM Supv. Petroleum Tech.)

- Twenty-Four (24) hours prior to running casing and cementing all casing strings to: blm_ut_vn_opreport@blm.gov.

BOP & Related Equipment Tests
(Notify BLM Supv. Petroleum Tech.)

- Twenty-Four (24) hours prior to initiating pressure tests.

First Production Notice
(Notify BLM Petroleum Engineer)

- Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

Company/Operator: Newfield Exploration Company

Well Name & Number: Ute Tribal 6-14-4-1W, Ute Tribal 15-14-4-1W, and Ute Tribal 16-15-4-1W

CONDITIONS OF APPROVAL

- All areas of disturbance (including surface pipelines) must have appropriate surface use agreements or approvals in place with the proper owner and/or agency before such action is started.
- The conditions of approval, as set forth by those owners and/or agencies, shall be adhered to.
- All new and replacement internal combustion oil and gas field engines of less than or equal to 300 design-rated horsepower must not emit more than 2 grams of NO_x per horsepower-hour. This requirement does not apply to oil and gas field engines of less than or equal to 40 design-rated horsepower.
- All new and replacement internal combustion oil and gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 gram of NO_x per horsepower-hour

DOWNHOLE PROGRAM

CONDITIONS OF APPROVAL (COAs)

SITE SPECIFIC DOWNHOLE COAs:

Operator: Newfield Production Company
Included in APD Down-hole reviews dated 11/07/2013
Wells:
Ute Tribal 15-14-4-1W
Ute Tribal 16-14-4-1W
Ute Tribal 7-21-4-1W

Well specific down-hole COA's:

- Newfield Production Company shall adhere to all referenced requirements in the SOP (version: Ute Tribal Green River Development Program of February 16, 2012).
- Cement for the 5 ½ casing will be brought to a minimum of 200 feet above the surface casing shoe.
- Variances to OO2, Section III.E shall be granted as requested regarding the air drilling program for the surface hole.
- The Flare pit shall be at least 100 feet from the well bore.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.

- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well by CD (compact disc). This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- For information regarding production reporting, contact the Office of Natural Resources Revenue (ONRR) at www.ONRR.gov.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if

performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

| | |
|--|--|
| STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING | FORM 9 |
| SUNDRY NOTICES AND REPORTS ON WELLS | |
| Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals. | |
| 1. TYPE OF WELL Oil Well | 5. LEASE DESIGNATION AND SERIAL NUMBER: 14-20-H62-6500 |
| 2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY | 6. IF INDIAN, ALLOTTEE OR TRIBE NAME: |
| 3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052 | 7. UNIT or CA AGREEMENT NAME: |
| PHONE NUMBER: 435 646-4825 Ext | 8. WELL NAME and NUMBER: Ute Tribal 15-14-4-1W |
| 4. LOCATION OF WELL FOOTAGES AT SURFACE: 0628 FSL 2157 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSE Section: 14 Township: 04.0S Range: 01.0W Meridian: U | 9. API NUMBER: 43047538880000 |
| | 9. FIELD and POOL or WILDCAT: PLEASANT VALLEY |
| | COUNTY: UINTAH |
| | STATE: UTAH |

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

| TYPE OF SUBMISSION | TYPE OF ACTION | | |
|--|--|---|--|
| <input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 8/21/2015 | <input type="checkbox"/> ACIDIZE | <input type="checkbox"/> ALTER CASING | <input type="checkbox"/> CASING REPAIR |
| <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: | <input type="checkbox"/> CHANGE TO PREVIOUS PLANS | <input type="checkbox"/> CHANGE TUBING | <input type="checkbox"/> CHANGE WELL NAME |
| <input type="checkbox"/> SPUD REPORT Date of Spud: | <input type="checkbox"/> CHANGE WELL STATUS | <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS | <input type="checkbox"/> CONVERT WELL TYPE |
| <input type="checkbox"/> DRILLING REPORT Report Date: | <input type="checkbox"/> DEEPEN | <input type="checkbox"/> FRACTURE TREAT | <input type="checkbox"/> NEW CONSTRUCTION |
| | <input type="checkbox"/> OPERATOR CHANGE | <input type="checkbox"/> PLUG AND ABANDON | <input type="checkbox"/> PLUG BACK |
| | <input type="checkbox"/> PRODUCTION START OR RESUME | <input type="checkbox"/> RECLAMATION OF WELL SITE | <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION |
| | <input type="checkbox"/> REPERFORATE CURRENT FORMATION | <input type="checkbox"/> SIDETRACK TO REPAIR WELL | <input type="checkbox"/> TEMPORARY ABANDON |
| | <input type="checkbox"/> TUBING REPAIR | <input type="checkbox"/> VENT OR FLARE | <input type="checkbox"/> WATER DISPOSAL |
| | <input type="checkbox"/> WATER SHUTOFF | <input type="checkbox"/> SI TA STATUS EXTENSION | <input checked="" type="checkbox"/> APD EXTENSION |
| | <input type="checkbox"/> WILDCAT WELL DETERMINATION | <input type="checkbox"/> OTHER | OTHER: <input style="width: 100px;" type="text"/> |

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield proposes to extend the Application for Permit to Drill this well.

Approved by the
August 05, 2015
Oil, Gas and Mining

Date: _____
By:

| | | |
|--|-------------------------------------|---------------------------------|
| NAME (PLEASE PRINT) Mandie Crozier | PHONE NUMBER 435 646-4825 | TITLE Regulatory Tech |
| SIGNATURE N/A | DATE 8/4/2015 | |



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047538880000

API: 43047538880000

Well Name: Ute Tribal 15-14-4-1W

Location: 0628 FSL 2157 FEL QTR SWSE SEC 14 TWNP 040S RNG 010W MER U

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 8/21/2013

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

Signature: Mandie Crozier

Date: 8/4/2015

Title: Regulatory Tech Representing: NEWFIELD PRODUCTION COMPANY

| | |
|--|--|
| STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING | FORM 9 |
| SUNDRY NOTICES AND REPORTS ON WELLS | |
| Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals. | |
| 1. TYPE OF WELL Oil Well | 5. LEASE DESIGNATION AND SERIAL NUMBER: 14-20-H62-6500 |
| 2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY | 6. IF INDIAN, ALLOTTEE OR TRIBE NAME: |
| 3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052 | 7. UNIT or CA AGREEMENT NAME: |
| PHONE NUMBER: 435 646-4825 Ext | 8. WELL NAME and NUMBER: Ute Tribal 15-14-4-1W |
| 4. LOCATION OF WELL FOOTAGES AT SURFACE: 0628 FSL 2157 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWSE Section: 14 Township: 04.0S Range: 01.0W Meridian: U | 9. API NUMBER: 43047538880000 |
| | 9. FIELD and POOL or WILDCAT: PLEASANT VALLEY |
| | COUNTY: UINTAH |
| | STATE: UTAH |

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

| TYPE OF SUBMISSION | TYPE OF ACTION | | |
|--|--|---|---|
| <input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 8/21/2016 | <input type="checkbox"/> ACIDIZE | <input type="checkbox"/> ALTER CASING | <input type="checkbox"/> CASING REPAIR |
| <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: | <input type="checkbox"/> CHANGE TO PREVIOUS PLANS | <input type="checkbox"/> CHANGE TUBING | <input type="checkbox"/> CHANGE WELL NAME |
| <input type="checkbox"/> SPUD REPORT Date of Spud: | <input type="checkbox"/> CHANGE WELL STATUS | <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS | <input type="checkbox"/> CONVERT WELL TYPE |
| <input type="checkbox"/> DRILLING REPORT Report Date: | <input type="checkbox"/> DEEPEN | <input type="checkbox"/> FRACTURE TREAT | <input type="checkbox"/> NEW CONSTRUCTION |
| | <input type="checkbox"/> OPERATOR CHANGE | <input type="checkbox"/> PLUG AND ABANDON | <input type="checkbox"/> PLUG BACK |
| | <input type="checkbox"/> PRODUCTION START OR RESUME | <input type="checkbox"/> RECLAMATION OF WELL SITE | <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION |
| | <input type="checkbox"/> REPERFORATE CURRENT FORMATION | <input type="checkbox"/> SIDETRACK TO REPAIR WELL | <input type="checkbox"/> TEMPORARY ABANDON |
| | <input type="checkbox"/> TUBING REPAIR | <input type="checkbox"/> VENT OR FLARE | <input type="checkbox"/> WATER DISPOSAL |
| | <input type="checkbox"/> WATER SHUTOFF | <input type="checkbox"/> SI TA STATUS EXTENSION | <input checked="" type="checkbox"/> APD EXTENSION |
| | <input type="checkbox"/> WILDCAT WELL DETERMINATION | <input type="checkbox"/> OTHER | OTHER: <input style="width: 100px;" type="text"/> |

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield proposes to extend the Application for Permit to Drill this well.

Approved by the
August 15, 2016
Oil, Gas and Mining

Date: _____
By: 

| | | |
|--|-------------------------------------|---------------------------------|
| NAME (PLEASE PRINT) Mandie Crozier | PHONE NUMBER 435 646-4825 | TITLE Regulatory Tech |
| SIGNATURE N/A | DATE 8/12/2016 | |



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047538880000

API: 43047538880000

Well Name: Ute Tribal 15-14-4-1W

Location: 0628 FSL 2157 FEL QTR SWSE SEC 14 TWNP 040S RNG 010W MER U

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 8/21/2013

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Mandie Crozier

Date: 8/12/2016

Title: Regulatory Tech Representing: NEWFIELD PRODUCTION COMPANY

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

JUN 24 2016

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010

APD

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

5. Lease Serial No.
1420H626500

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
UTE TRIBAL 15-14-4-1W

9. API Well No.
43-047-53888

10. Field and Pool, or Exploratory
UNDESIGNATED

11. County or Parish, and State
JUNTAH COUNTY, UT

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
NEWFIELD PRODUCTION COMPANY
Contact: MANDIE CROZIER
E-Mail: MCROZIER@NEWFIELD.COM

3a. Address
ROUTE 3 BOX 3630
MYTON, UT 84052

3b. Phone No. (include area code)
Ph: 435-646-4825

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 14 T4S R1W Mer UBM SWSE 628FSL 2157FEL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

| TYPE OF SUBMISSION | TYPE OF ACTION |
|--|--|
| <input checked="" type="checkbox"/> Notice of Intent | <input type="checkbox"/> Acidize <input type="checkbox"/> Deepen <input type="checkbox"/> Production (Start/Resume) <input type="checkbox"/> Water Shut-Off |
| <input type="checkbox"/> Subsequent Report | <input type="checkbox"/> Alter Casing <input type="checkbox"/> Fracture Treat <input type="checkbox"/> Reclamation <input type="checkbox"/> Well Integrity |
| <input type="checkbox"/> Final Abandonment Notice | <input type="checkbox"/> Casing Repair <input type="checkbox"/> New Construction <input type="checkbox"/> Recomplete <input checked="" type="checkbox"/> Other |
| | <input type="checkbox"/> Change Plans <input type="checkbox"/> Plug and Abandon <input type="checkbox"/> Temporarily Abandon <input type="checkbox"/> Change to Original APD |
| | <input type="checkbox"/> Convert to Injection <input type="checkbox"/> Plug Back <input type="checkbox"/> Water Disposal |

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Newfield proposes to extend the Application for Permit to Drill this well.
The APD was approved on 08/11/2014.

CONDITIONS OF APPROVAL ATTACHED

VERNAL FIELD OFFICE
ENG. Beth 9/9/16
GEOL. _____
E.S. _____
PET. _____
A.M. _____

14. I hereby certify that the foregoing is true and correct.
Electronic Submission #343144 verified by the BLM Well Information System
For NEWFIELD PRODUCTION COMPANY, sent to the Vernal
Committed to AFMSS for processing by C. BETH HAMANN on 06/27/2016 ()

Name (Printed/Typed) MANDIE CROZIER Title REGULATORY SPECIALIST

Signature (Electronic Submission) Date 06/24/2016

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By _____ Title Assistant Field Manager
Lands & Mineral Resources SEP 14 2016
Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office **VERNAL FIELD OFFICE**

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****

16CRH 1695E