

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL		1. WELL NAME and NUMBER GMBU Q-26-8-17
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>		3. FIELD OR WILDCAT MONUMENT BUTTE
4. TYPE OF WELL Oil Well Coalbed Methane Well: NO		5. UNIT or COMMUNITIZATION AGREEMENT NAME GMBU (GRRV)
6. NAME OF OPERATOR NEWFIELD PRODUCTION COMPANY		7. OPERATOR PHONE 435 646-4825
8. ADDRESS OF OPERATOR Rt 3 Box 3630 , Myton, UT, 84052		9. OPERATOR E-MAIL mcozler@newfield.com
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) UTU-76240	11. MINERAL OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>	12. SURFACE OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>
13. NAME OF SURFACE OWNER (if box 12 = 'fee')		14. SURFACE OWNER PHONE (if box 12 = 'fee')
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')		16. SURFACE OWNER E-MAIL (if box 12 = 'fee')
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')	18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>	19. SLANT VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/>

20. LOCATION OF WELL	FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN
LOCATION AT SURFACE	2222 FSL 2099 FWL	NESW	26	8.0 S	17.0 E	S
Top of Uppermost Producing Zone	1612 FSL 1567 FWL	NESW	26	8.0 S	17.0 E	S
At Total Depth	1100 FSL 1094 FWL	SWSW	26	8.0 S	17.0 E	S

21. COUNTY UINTAH	22. DISTANCE TO NEAREST LEASE LINE (Feet) 1094	23. NUMBER OF ACRES IN DRILLING UNIT 20
27. ELEVATION - GROUND LEVEL 5062	25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 1291	26. PROPOSED DEPTH MD: 6460 TVD: 6250
	28. BOND NUMBER WYB000493	29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 437478

Hole, Casing, and Cement Information

String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement	Sacks	Yield	Weight
Surf	12.25	8.625	0 - 300	24.0	J-55 ST&C	8.3	Class G	138	1.17	15.8
Prod	7.875	5.5	0 - 6460	15.5	J-55 LT&C	8.3	Premium Lite High Strength	308	3.26	11.0
							50/50 Poz	363	1.24	14.3

ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES

<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)	<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)	<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP

NAME Heather Calder	TITLE Production Technician	PHONE 435 646-4936
SIGNATURE	DATE 08/05/2013	EMAIL hcalder@newfield.com
API NUMBER ASSIGNED 43047539410000	APPROVAL  Permit Manager	

NEWFIELD PRODUCTION COMPANY
 GMBU Q-26-8-17
 AT SURFACE: NE/SW SECTION 26, T8S R17E
 UINTAH COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0' – 4,020'
Green River	4,020'
Wasatch	6,450'
Proposed TD	6,460'(MD) 6,250' (TVD)

3. **ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation (Oil) 4,020' – 6,450'

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval	Date Sampled
Flow Rate	Temperature
Hardness	pH
Water Classification (State of Utah)	Dissolved Calcium (Ca) (mg/l)
Dissolved Iron (Fe) (ug/l)	Dissolved Sodium (Na) (mg/l)
Dissolved Magnesium (Mg) (mg/l)	Dissolved Carbonate (CO ₃) (mg/l)
Dissolved Bicarbonate (NaHCO ₃) (mg/l)	Dissolved Chloride (Cl) (mg/l)
Dissolved Sulfate (SO ₄) (mg/l)	Dissolved Total Solids (TDS) (mg/l)

4. **PROPOSED CASING PROGRAM**

a. **Casing Design: GMBU Q-26-8-17**

Size	Interval		Weight	Grade	Coupling	Design Factors		
	Top	Bottom				Burst	Collapse	Tension
Surface casing 8-5/8"	0'	300'	24.0	J-55	STC	2,950 17.53	1,370 14.35	244,000 33.89
Prod casing 5-1/2"	0'	6,460'	15.5	J-55	LTC	4,810 2.34	4,040 1.97	217,000 2.17

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient – gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure – gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe = 13.0 ppg
 Pore pressure at surface casing shoe = 8.33 ppg
 Pore pressure at prod casing shoe = 8.33 ppg
 Gas gradient = 0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. **Cementing Design: GMBU Q-26-8-17**

Job	Fill	Description	Sacks	OH Excess*	Weight (ppg)	Yield (ft ³ /sk)
			ft ³			
Surface casing	300'	Class G w/ 2% CaCl	138	30%	15.8	1.17
			161			
Prod casing Lead	4,460'	Prem Lite II w/ 10% gel + 3% KCl	308	30%	11.0	3.26
			1005			
Prod casing Tail	2,000'	50/50 Poz w/ 2% gel + 3% KCl	363	30%	14.3	1.24
			451			

- *Actual volume pumped will be 15% over the caliper log
- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
- Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. **MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

6. **TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

From surface to ± 300 feet will be drilled with an air/mist system. The air rig is equipped with a 6 1/2" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about ± 300 feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. **AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. **TESTING, LOGGING AND CORING PROGRAMS:**

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 300' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +/- . A cement bond log will be run from PBDT to cement top. No drill stem testing or coring is planned for this well.

9. **ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:**

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated


bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.

10. **ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:**

It is anticipated that the drilling operations will commence the fourth quarter of 2013, and take approximately seven (7) days from spud to rig release.


T8S, R17E, S.L.B.&M.

NEWFIELD EXPLORATION COMPANY

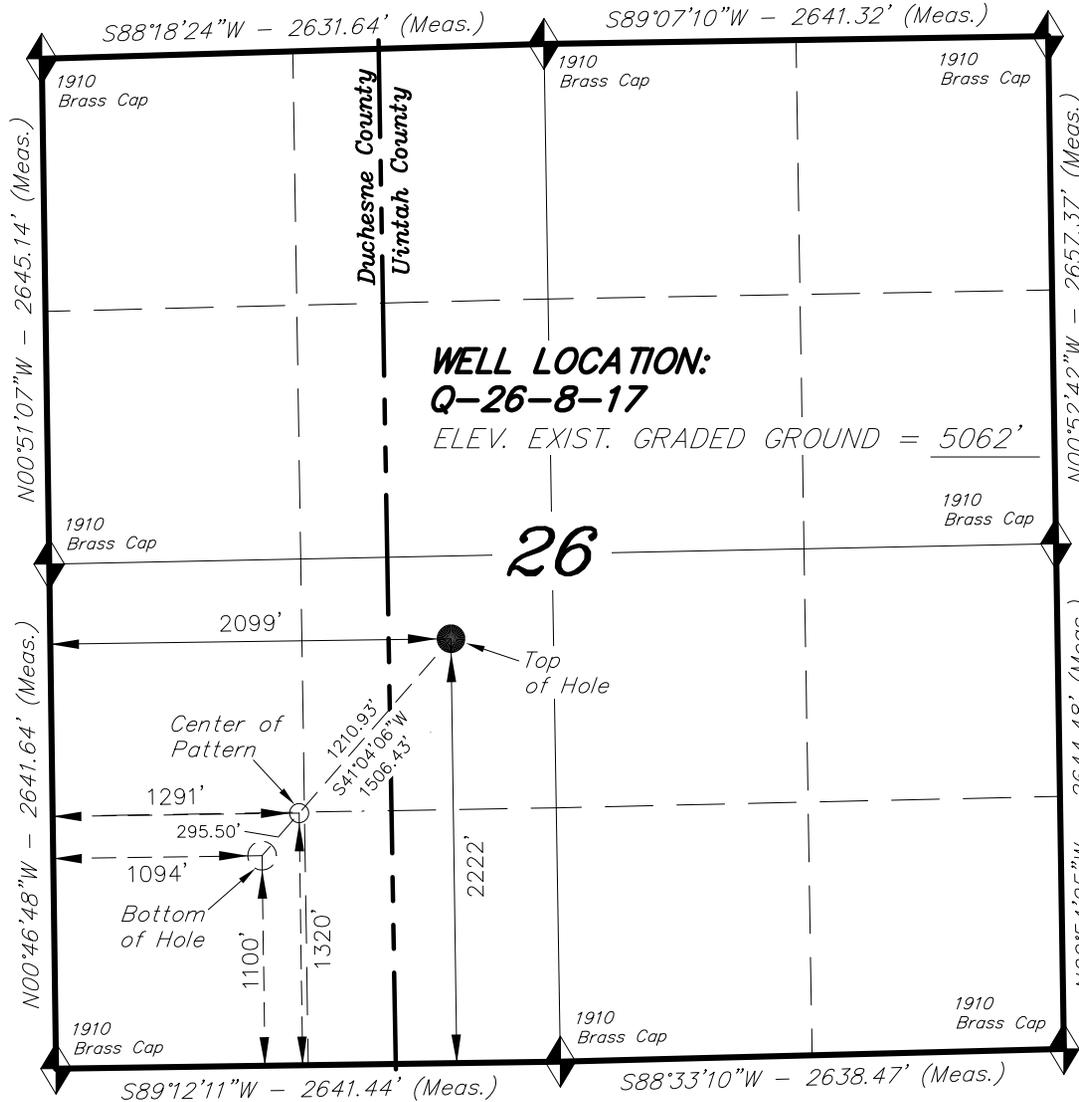

WELL LOCATION, Q-26-8-17, LOCATED AS SHOWN IN THE NE 1/4 SW 1/4 OF SECTION 26, T8S, R17E, S.L.B.&M. UTAH COUNTY, UTAH.


TARGET BOTTOM HOLE, Q-26-8-17, LOCATED AS SHOWN IN THE SW 1/4 SW 1/4 OF SECTION 26, T8S, R17E, S.L.B.&M. DUCHESNE COUNTY, UTAH.



NOTES:

1. Well footages are measured at right angles to the Section Lines.
2. Bearings are based on Global Positioning Satellite observations.

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

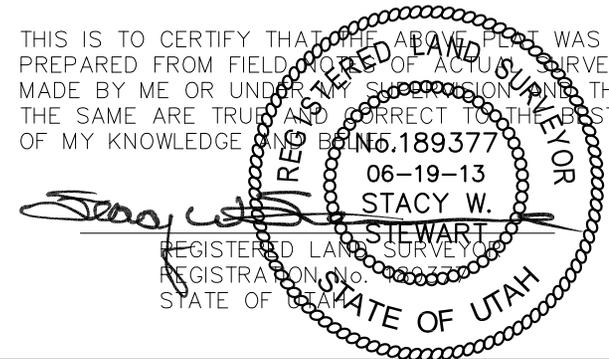

◆ = SECTION CORNERS LOCATED

BASIS OF ELEV; Elevations are based on an N.G.S. OPUS Correction. LOCATION: LAT. $40^{\circ}04'09.56''$ LONG. $110^{\circ}00'43.28''$ (Tristate Aluminum Cap) Elev. 5281.57'


NAD 83 (SURFACE LOCATION)	
LATITUDE = $40^{\circ}05'15.87''$	
LONGITUDE = $109^{\circ}58'32.44''$	
NAD 27 (SURFACE LOCATION)	
LATITUDE = $40^{\circ}05'16.01''$	
LONGITUDE = $109^{\circ}58'29.91''$	
NAD 83 (CENTER OF PATTERN)	NAD 83 (BOTTOM HOLE LOCATION)
LATITUDE = $40^{\circ}05'06.99''$	LATITUDE = $40^{\circ}05'04.82''$
LONGITUDE = $109^{\circ}58'42.87''$	LONGITUDE = $109^{\circ}58'45.42''$
NAD 27 (CENTER OF PATTERN)	NAD 27 (BOTTOM HOLE LOCATION)
LATITUDE = $40^{\circ}05'07.12''$	LATITUDE = $40^{\circ}05'04.96''$
LONGITUDE = $109^{\circ}58'40.34''$	LONGITUDE = $109^{\circ}58'42.89''$

TRI STATE LAND SURVEYING & CONSULTING

180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
 (435) 781-2501

DATE SURVEYED: 02-01-13	SURVEYED BY: S.H.	VERSION:
DATE DRAWN: 06-19-13	DRAWN BY: M.W.	V2
REVISED:	SCALE: 1" = 1000'	

Access Road Map

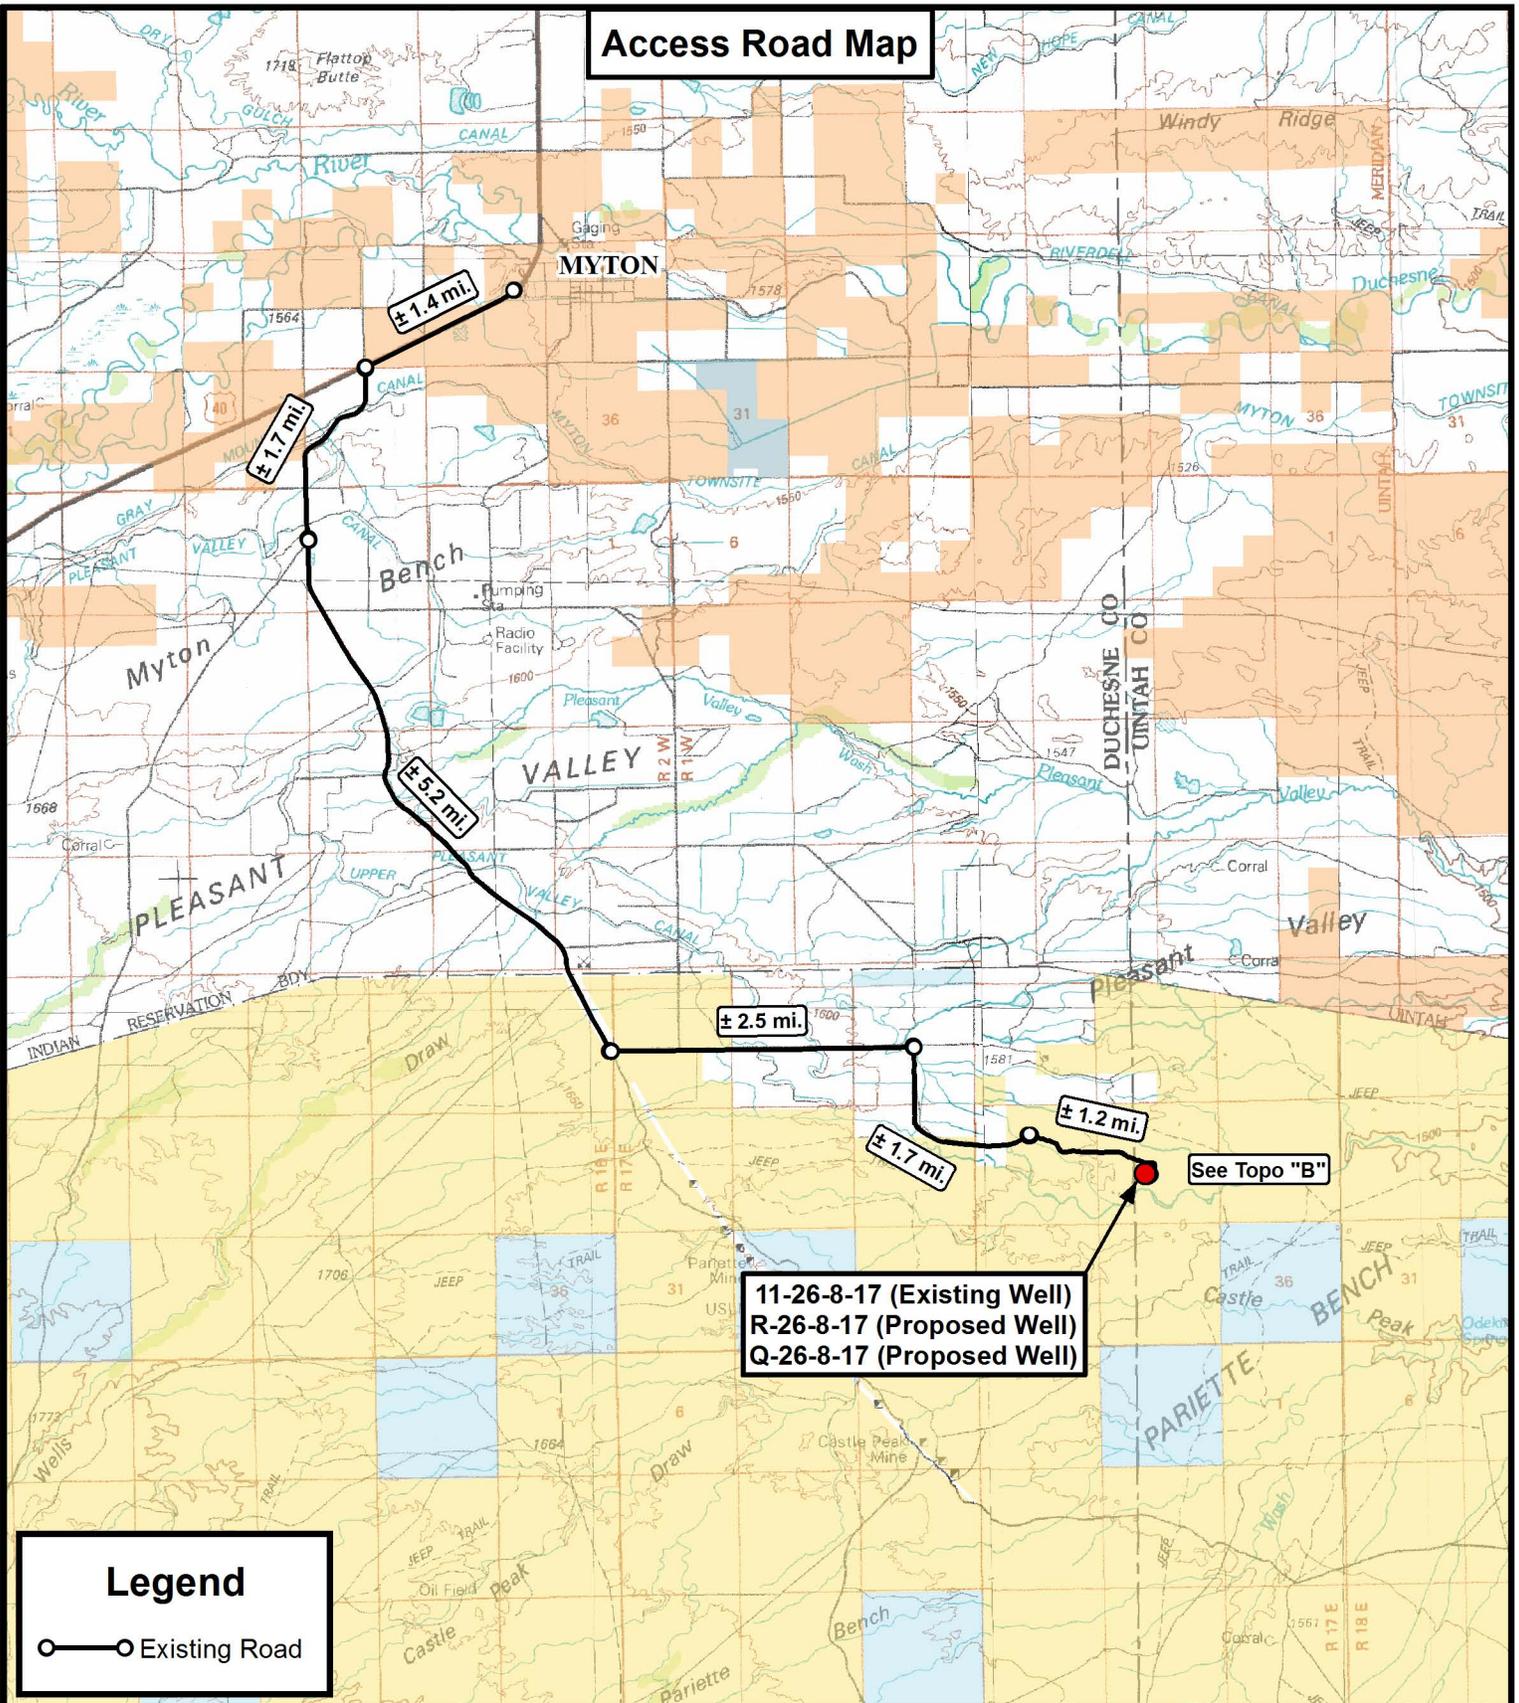

Legend

○—○ Existing Road

11-26-8-17 (Existing Well)
 R-26-8-17 (Proposed Well)
 Q-26-8-17 (Proposed Well)

See Topo "B"

Tri State Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
 F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY


11-26-8-17 (Existing Well)
 R-26-8-17 (Proposed Well)
 Q-26-8-17 (Proposed Well)
 Sec. 26, T8S, R17E, S.L.B.&M. Uintah County, UT.

DRAWN BY:	A.P.C.	REVISED:	VERSION:
DATE:	06-18-2013		V2
SCALE:	1:100,000		

TOPOGRAPHIC MAP

SHEET
A

Access Road Map

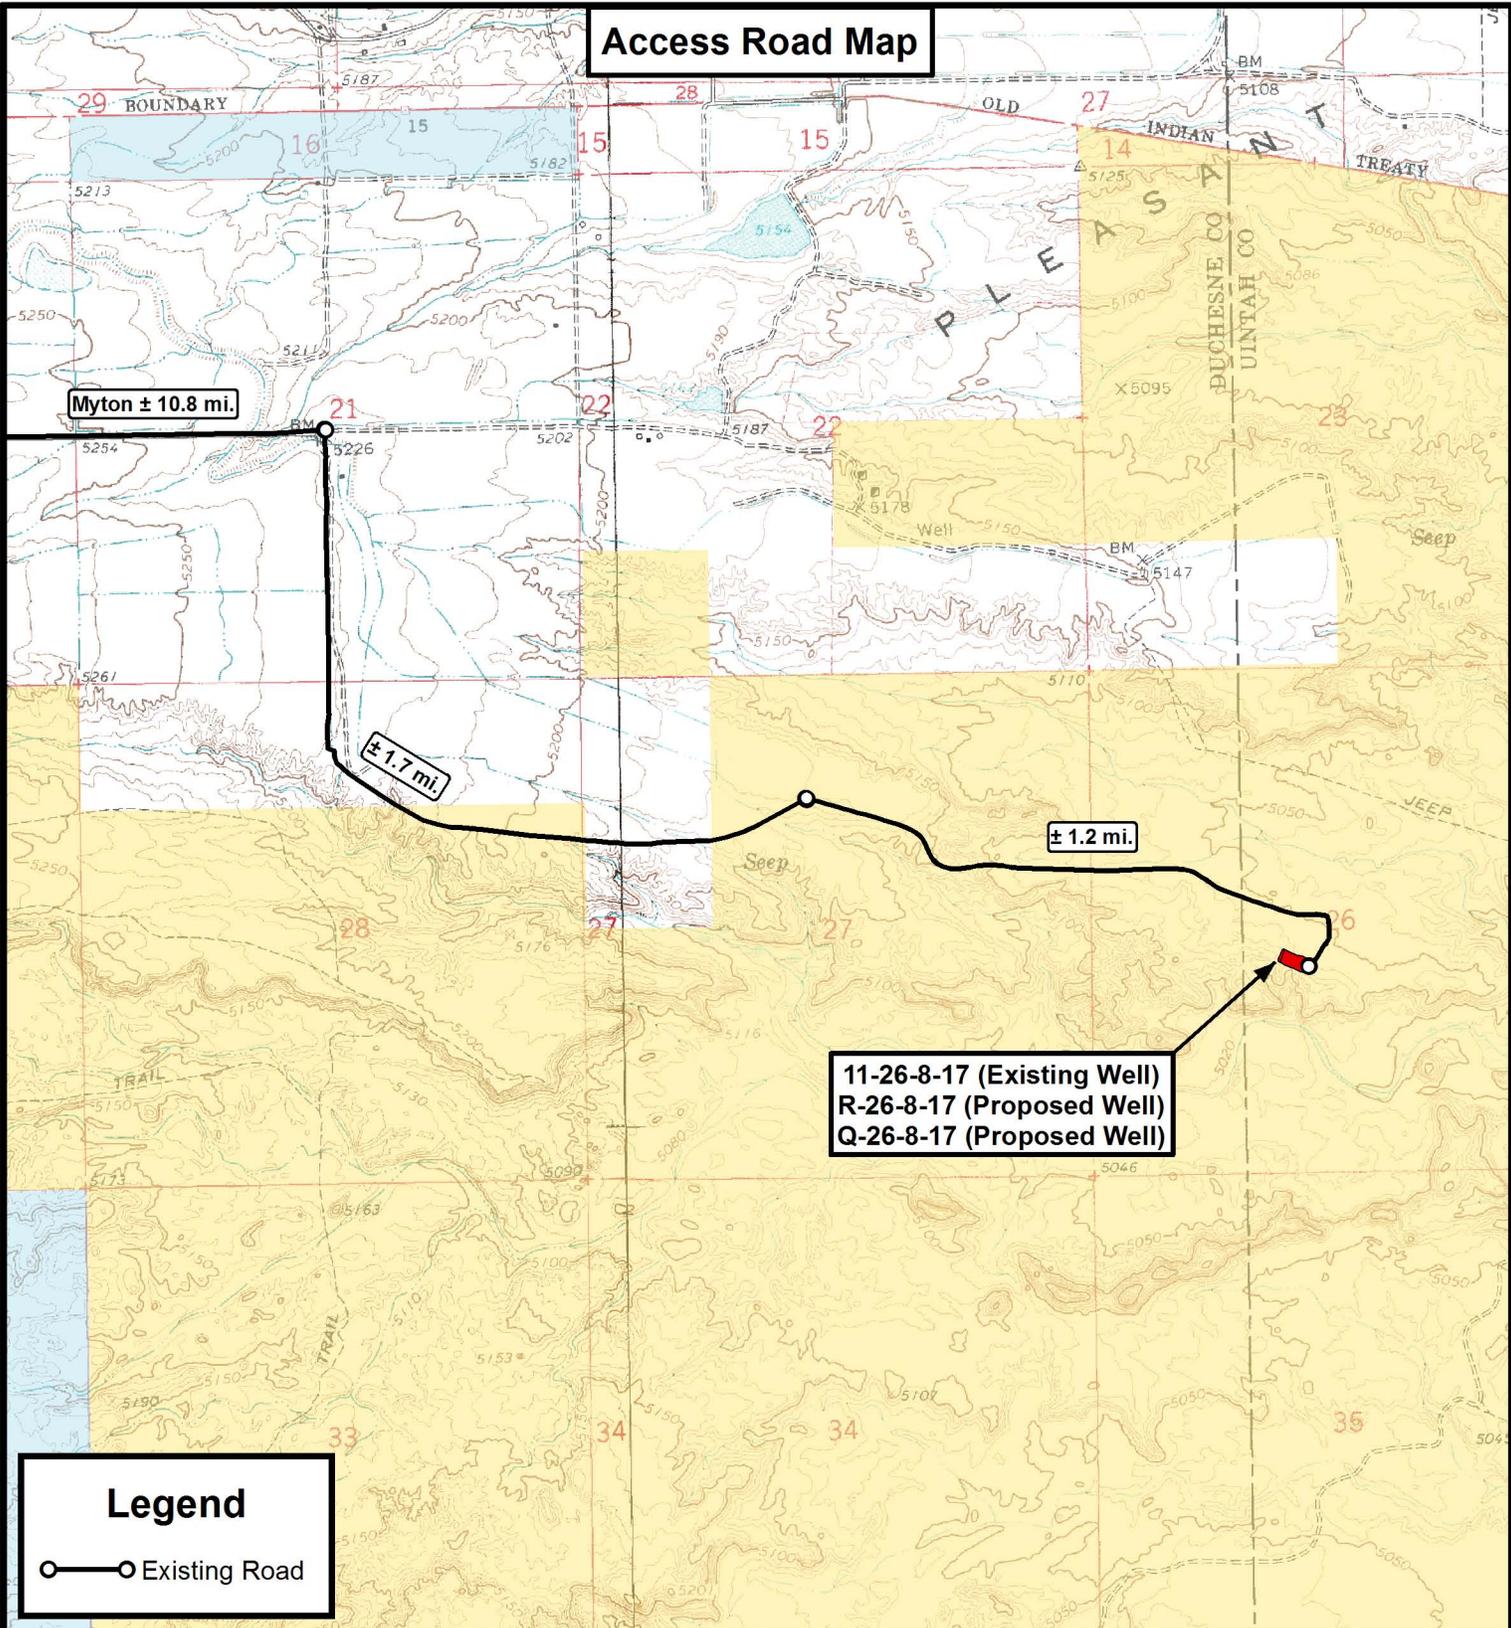

Myton ± 10.8 mi.

± 1.7 mi.

± 1.2 mi.

11-26-8-17 (Existing Well)
 R-26-8-17 (Proposed Well)
 Q-26-8-17 (Proposed Well)

Legend

○—○ Existing Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.



Tri State Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
 F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY


11-26-8-17 (Existing Well)
 R-26-8-17 (Proposed Well)
 Q-26-8-17 (Proposed Well)
 Sec. 26, T8S, R17E, S.L.B.&M. Uintah County, UT.

DRAWN BY:	A.P.C.	REVISED:	VERSION:
DATE:	06-18-2013		V2
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET **B**

Proposed Pipeline Map

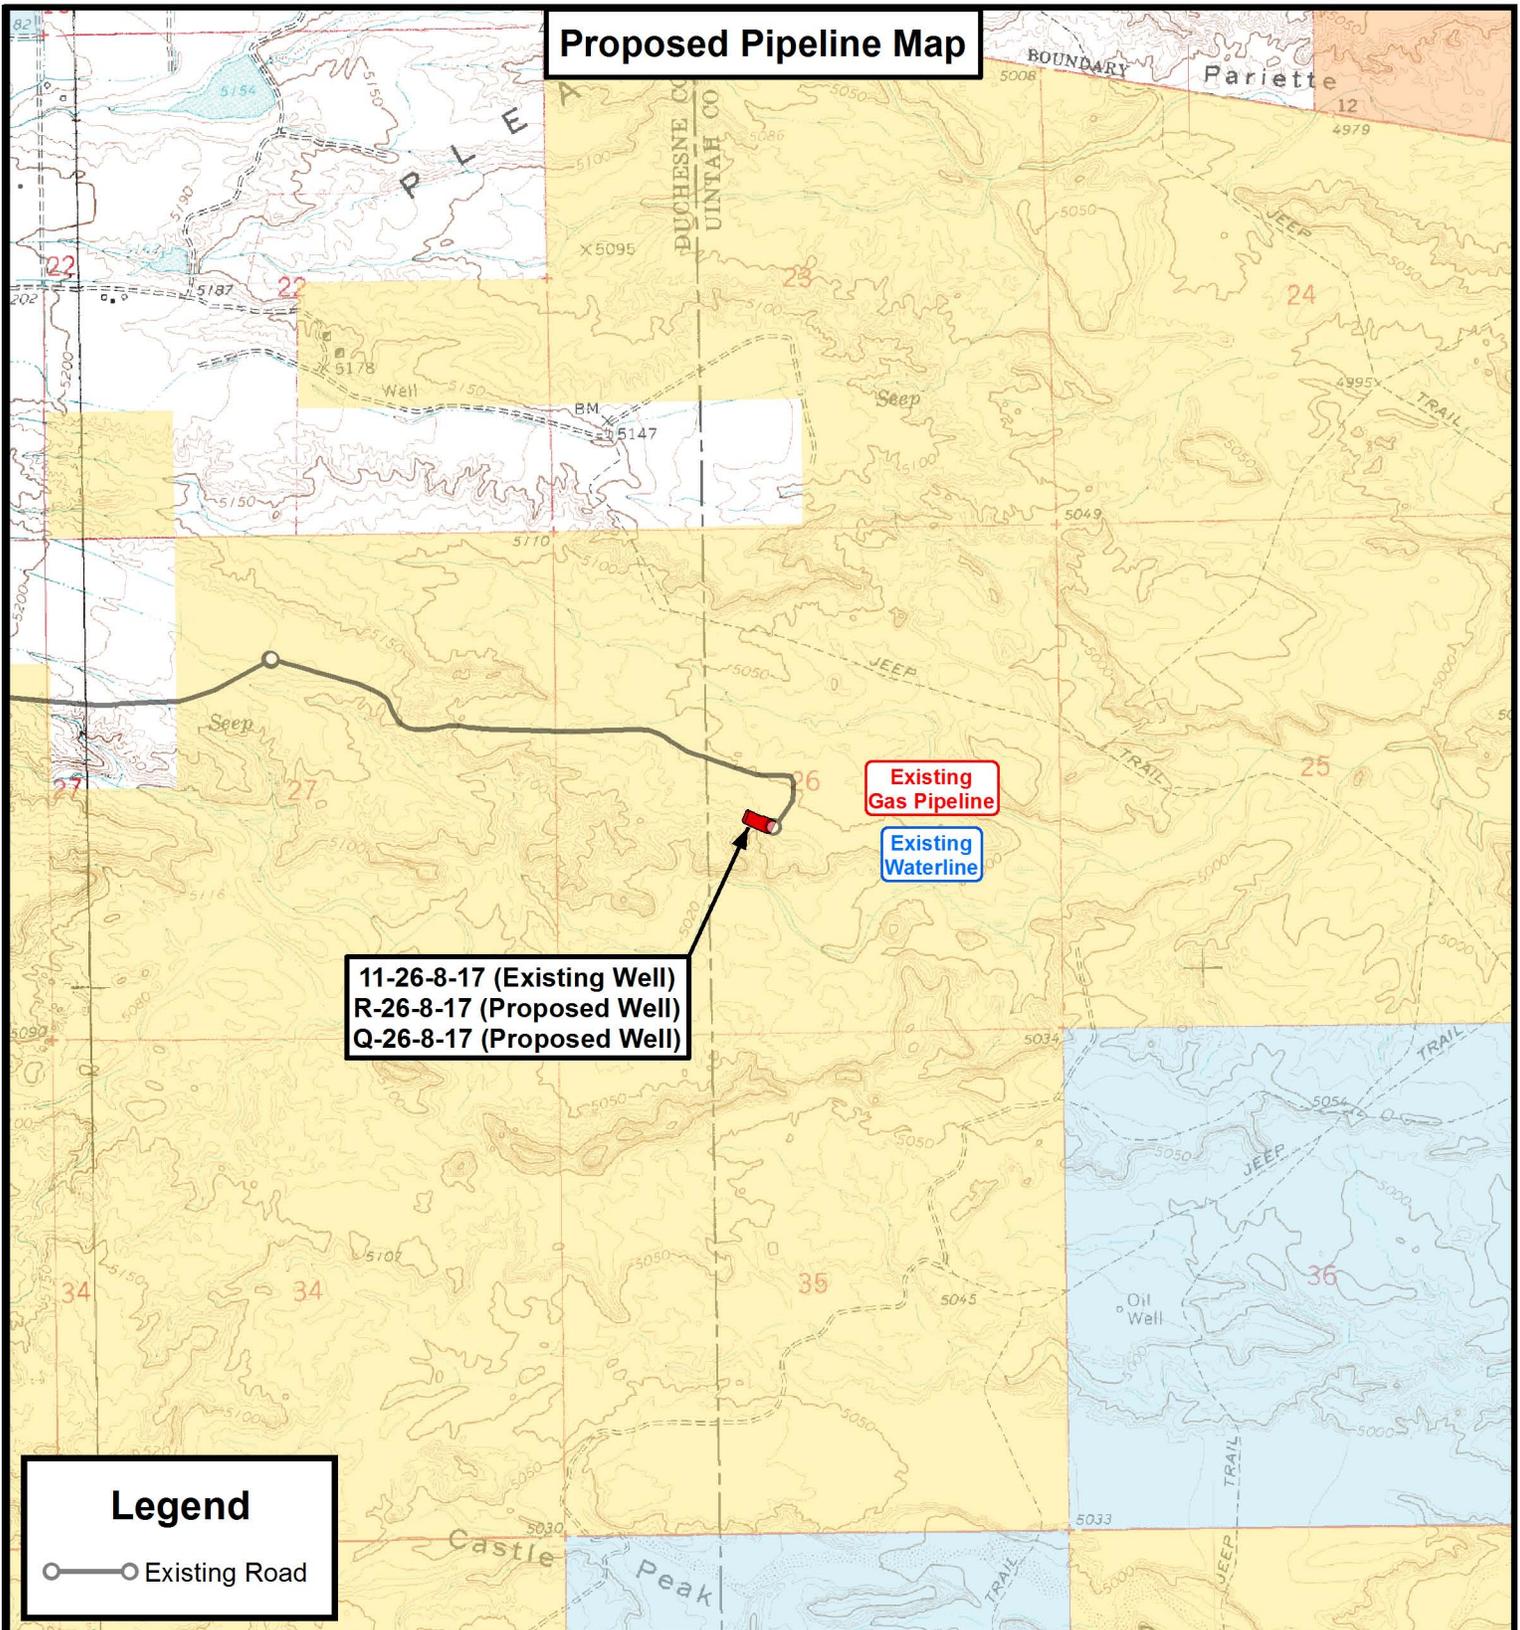

11-26-8-17 (Existing Well)
 R-26-8-17 (Proposed Well)
 Q-26-8-17 (Proposed Well)

Existing Gas Pipeline

Existing Waterline

Legend

○—○ Existing Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

Tri State Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
 F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

11-26-8-17 (Existing Well)
 R-26-8-17 (Proposed Well)
 Q-26-8-17 (Proposed Well)
 Sec. 26, T8S, R17E, S.L.B.&M. Uintah County, UT.


DRAWN BY:	A.P.C.	REVISED:	VERSION:
DATE:	06-18-2013		V2
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET
C

Exhibit "B" Map

11-26-8-17 (Existing Well)
 R-26-8-17 (Proposed Well)
 Q-26-8-17 (Proposed Well)

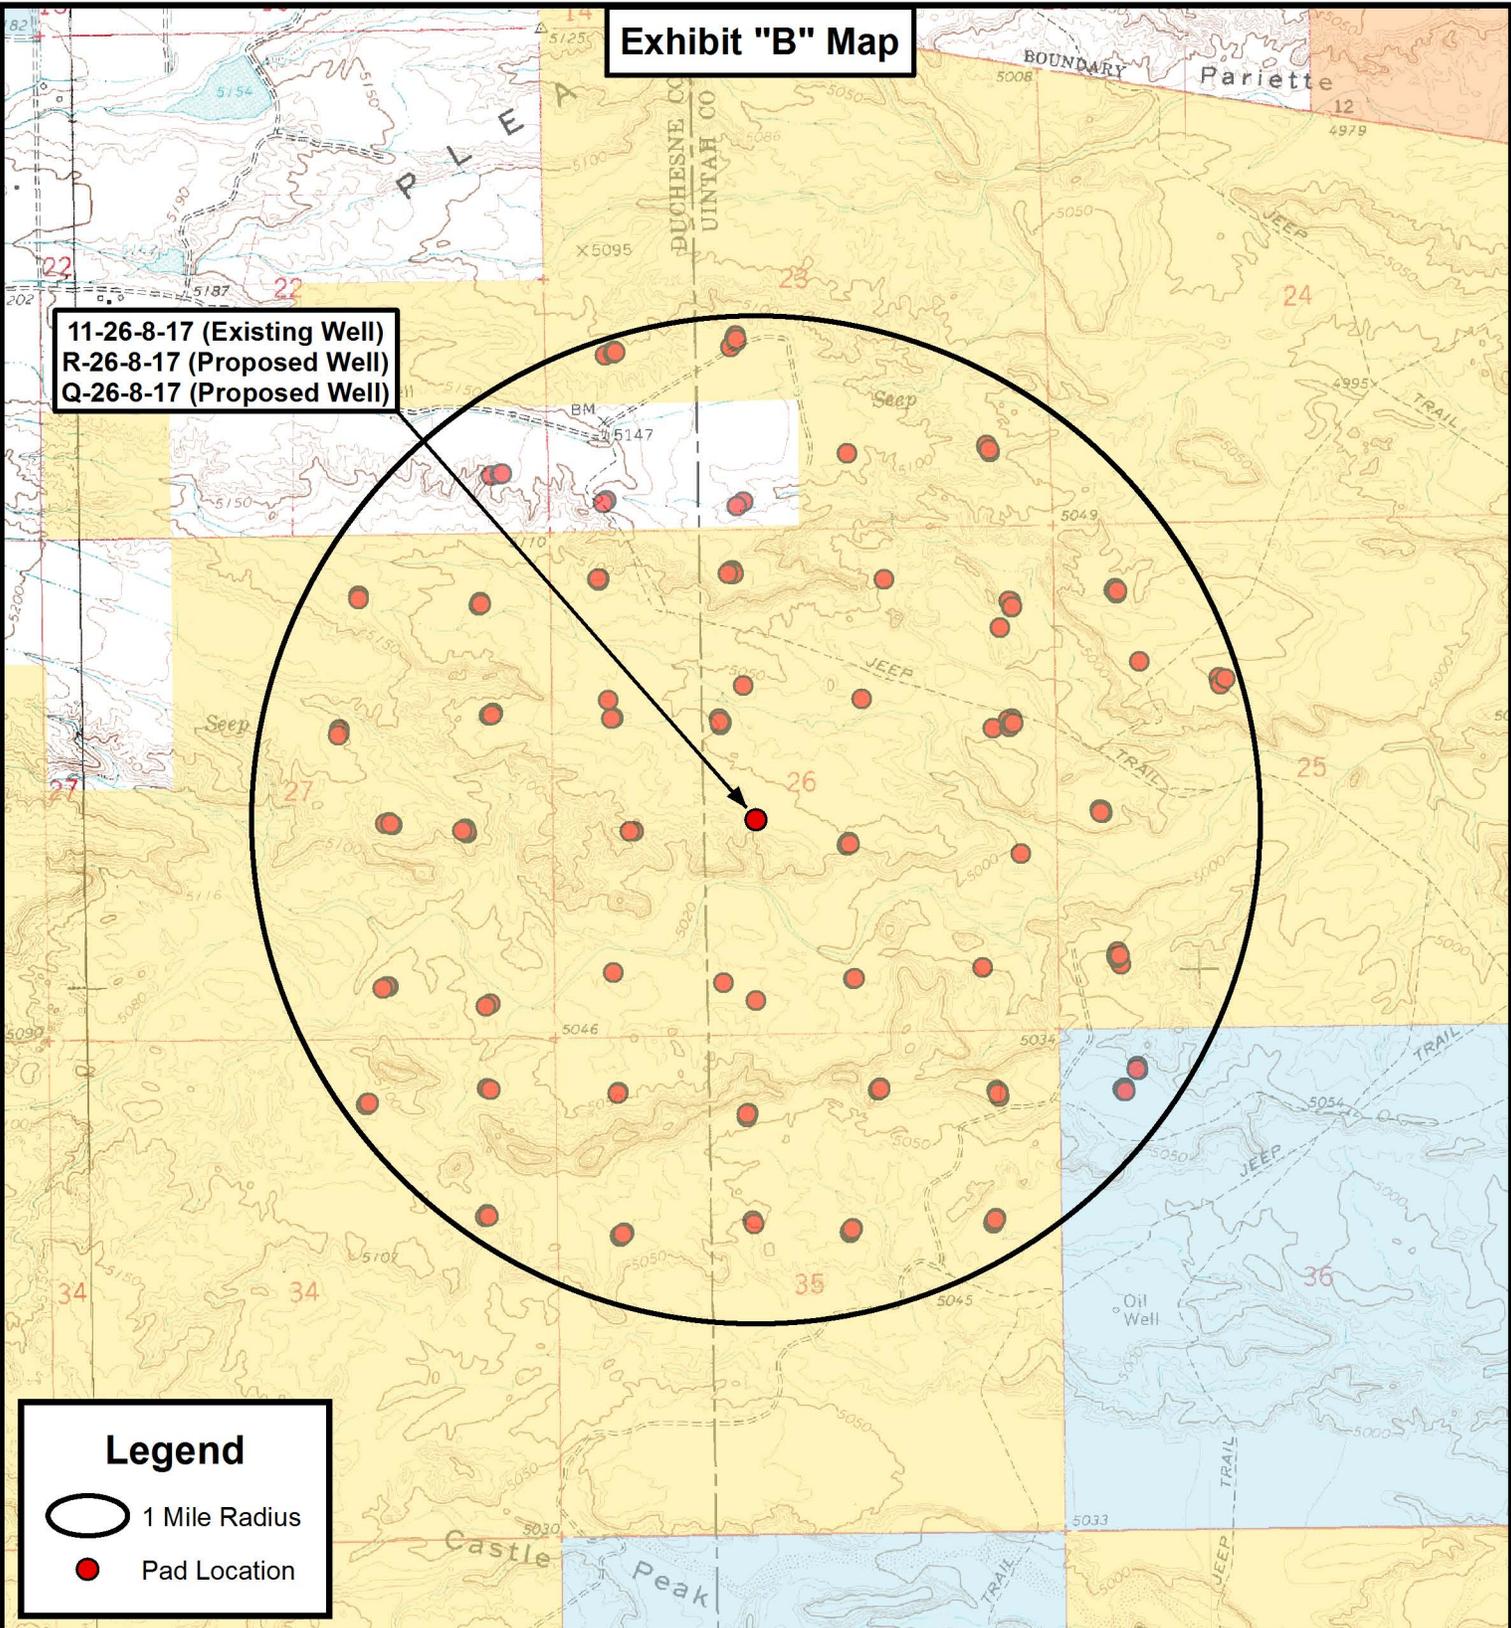

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.



**Tri State
 Land Surveying, Inc.**
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
 F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

11-26-8-17 (Existing Well)
 R-26-8-17 (Proposed Well)
 Q-26-8-17 (Proposed Well)
 Sec. 26, T8S, R17E, S.L.B.&M. Uintah County, UT.

DRAWN BY:	A.P.C.	REVISED:	VERSION:
DATE:	06-18-2013		V2
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET
D

Coordinate Report

Well Number	Feature Type	Latitude (NAD 83) (DMS)	Longitude (NAD 83) (DMS)
11-26-8-17	Surface Hole	40° 05' 16.03" N	109° 58' 31.94" W
R-26-8-17	Surface Hole	40° 05' 15.95" N	109° 58' 32.19" W
Q-26-8-17	Surface Hole	40° 05' 15.87" N	109° 58' 32.44" W
R-26-8-17	Center of Pattern	40° 05' 06.95" N	109° 58' 25.69" W
Q-26-8-17	Center of Pattern	40° 05' 06.99" N	109° 58' 42.87" W
R-26-8-17	Bottom of Hole	40° 05' 04.74" N	109° 58' 24.10" W
Q-26-8-17	Bottom of Hole	40° 05' 04.82" N	109° 58' 45.42" W
Well Number	Feature Type	Latitude (NAD 83) (DD)	Longitude (NAD 83) (DD)
11-26-8-17	Surface Hole	40.087786	109.975538
R-26-8-17	Surface Hole	40.087764	109.975608
Q-26-8-17	Surface Hole	40.087743	109.975679
R-26-8-17	Center of Pattern	40.085263	109.973803
Q-26-8-17	Center of Pattern	40.085275	109.978576
R-26-8-17	Bottom of Hole	40.084650	109.973361
Q-26-8-17	Bottom of Hole	40.084672	109.979283
Well Number	Feature Type	Northing (NAD 83) (UTM Meters)	Longitude (NAD 83) (UTM Meters)
11-26-8-17	Surface Hole	4438003.474	587336.495
R-26-8-17	Surface Hole	4438001.018	587330.518
Q-26-8-17	Surface Hole	4437998.562	587324.540
R-26-8-17	Center of Pattern	4437725.206	587487.593
Q-26-8-17	Center of Pattern	4437721.796	587080.665
R-26-8-17	Bottom of Hole	4437657.540	587526.129
Q-26-8-17	Bottom of Hole	4437654.258	587021.153
Well Number	Feature Type	Latitude (NAD 27) (DMS)	Longitude (NAD 27) (DMS)
11-26-8-17	Surface Hole	40° 05' 16.16" N	109° 58' 29.40" W
R-26-8-17	Surface Hole	40° 05' 16.09" N	109° 58' 29.66" W
Q-26-8-17	Surface Hole	40° 05' 16.01" N	109° 58' 29.91" W
R-26-8-17	Center of Pattern	40° 05' 07.08" N	109° 58' 23.16" W
Q-26-8-17	Center of Pattern	40° 05' 07.12" N	109° 58' 40.34" W
R-26-8-17	Bottom of Hole	40° 05' 04.87" N	109° 58' 21.56" W
Q-26-8-17	Bottom of Hole	40° 05' 04.96" N	109° 58' 42.89" W



P: (435) 781-2501
F: (435) 781-2518

NEWFIELD EXPLORATION COMPANY

11-26-8-17 (Existing Well)
R-26-8-17 (Proposed Well)
Q-26-8-17 (Proposed Well)
Sec. 26, T8S, R17E, S.L.B.&M. Uintah County, UT.

DRAWN BY: A.P.C.
DATE: 06-18-2013
VERSION: V2

REVISED:

COORDINATE REPORT

SHEET

1

RECEIVED: August 05, 2013



NEWFIELD EXPLORATION

**USGS Myton SW (UT)
SECTION 26 T8, R17
Q-26-8-17**

Wellbore #1

Plan: Design #1

Standard Planning Report

14 June, 2013





Payzone Directional
Planning Report



Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well Q-26-8-17
Company:	NEWFIELD EXPLORATION	TVD Reference:	Q-26-8-17 @ 5072.0ft (Original Well Elev)
Project:	USGS Myton SW (UT)	MD Reference:	Q-26-8-17 @ 5072.0ft (Original Well Elev)
Site:	SECTION 26 T8, R17	North Reference:	True
Well:	Q-26-8-17	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Utah Central Zone		

Site	SECTION 26 T8, R17				
Site Position:		Northing:	7,206,000.00 ft	Latitude:	40° 5' 32.132 N
From:	Map	Easting:	2,069,000.00 ft	Longitude:	109° 58' 4.648 W
Position Uncertainty:	0.0 ft	Slot Radius:	"	Grid Convergence:	0.98 °

Well	Q-26-8-17, SHL LAT: 40 05 15.87 LONG: -109 58 32.44					
Well Position	+N/-S	-1,645.6 ft	Northing:	7,204,317.89 ft	Latitude:	40° 5' 15.870 N
	+E/-W	-2,159.8 ft	Easting:	2,066,868.61 ft	Longitude:	109° 58' 32.440 W
Position Uncertainty		0.0 ft	Wellhead Elevation:	5,072.0 ft	Ground Level:	5,062.0 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	6/12/2013	11.03	65.80	52,112

Design	Design #1			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.0	0.0	0.0	221.07

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,697.6	16.46	221.07	1,682.6	-118.1	-102.9	1.50	1.50	0.00	221.07	
5,417.6	16.46	221.07	5,250.0	-912.9	-795.6	0.00	0.00	0.00	0.00	Q-26-8-17 TGT
6,460.3	16.46	221.07	6,250.0	-1,135.7	-989.7	0.00	0.00	0.00	0.00	



Payzone Directional
Planning Report



Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well Q-26-8-17
Company:	NEWFIELD EXPLORATION	TVD Reference:	Q-26-8-17 @ 5072.0ft (Original Well Elev)
Project:	USGS Myton SW (UT)	MD Reference:	Q-26-8-17 @ 5072.0ft (Original Well Elev)
Site:	SECTION 26 T8, R17	North Reference:	True
Well:	Q-26-8-17	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	1.50	221.07	700.0	-1.0	-0.9	1.3	1.50	1.50	0.00
800.0	3.00	221.07	799.9	-3.9	-3.4	5.2	1.50	1.50	0.00
900.0	4.50	221.07	899.7	-8.9	-7.7	11.8	1.50	1.50	0.00
1,000.0	6.00	221.07	999.3	-15.8	-13.7	20.9	1.50	1.50	0.00
1,100.0	7.50	221.07	1,098.6	-24.6	-21.5	32.7	1.50	1.50	0.00
1,200.0	9.00	221.07	1,197.5	-35.5	-30.9	47.0	1.50	1.50	0.00
1,300.0	10.50	221.07	1,296.1	-48.2	-42.0	64.0	1.50	1.50	0.00
1,400.0	12.00	221.07	1,394.2	-62.9	-54.8	83.5	1.50	1.50	0.00
1,500.0	13.50	221.07	1,491.7	-79.6	-69.3	105.5	1.50	1.50	0.00
1,600.0	15.00	221.07	1,588.6	-98.1	-85.5	130.2	1.50	1.50	0.00
1,697.6	16.46	221.07	1,682.6	-118.1	-102.9	156.6	1.50	1.50	0.00
1,700.0	16.46	221.07	1,684.9	-118.6	-103.3	157.3	0.00	0.00	0.00
1,800.0	16.46	221.07	1,780.8	-140.0	-122.0	185.6	0.00	0.00	0.00
1,900.0	16.46	221.07	1,876.7	-161.3	-140.6	214.0	0.00	0.00	0.00
2,000.0	16.46	221.07	1,972.6	-182.7	-159.2	242.3	0.00	0.00	0.00
2,100.0	16.46	221.07	2,068.5	-204.1	-177.8	270.7	0.00	0.00	0.00
2,200.0	16.46	221.07	2,164.4	-225.4	-196.4	299.0	0.00	0.00	0.00
2,300.0	16.46	221.07	2,260.3	-246.8	-215.1	327.3	0.00	0.00	0.00
2,400.0	16.46	221.07	2,356.2	-268.2	-233.7	355.7	0.00	0.00	0.00
2,500.0	16.46	221.07	2,452.1	-289.5	-252.3	384.0	0.00	0.00	0.00
2,600.0	16.46	221.07	2,548.0	-310.9	-270.9	412.4	0.00	0.00	0.00
2,700.0	16.46	221.07	2,643.9	-332.3	-289.5	440.7	0.00	0.00	0.00
2,800.0	16.46	221.07	2,739.8	-353.6	-308.2	469.1	0.00	0.00	0.00
2,900.0	16.46	221.07	2,835.7	-375.0	-326.8	497.4	0.00	0.00	0.00
3,000.0	16.46	221.07	2,931.6	-396.4	-345.4	525.7	0.00	0.00	0.00
3,100.0	16.46	221.07	3,027.5	-417.7	-364.0	554.1	0.00	0.00	0.00
3,200.0	16.46	221.07	3,123.4	-439.1	-382.6	582.4	0.00	0.00	0.00
3,300.0	16.46	221.07	3,219.3	-460.5	-401.3	610.8	0.00	0.00	0.00
3,400.0	16.46	221.07	3,315.2	-481.8	-419.9	639.1	0.00	0.00	0.00
3,500.0	16.46	221.07	3,411.1	-503.2	-438.5	667.5	0.00	0.00	0.00
3,600.0	16.46	221.07	3,507.0	-524.6	-457.1	695.8	0.00	0.00	0.00
3,700.0	16.46	221.07	3,602.9	-545.9	-475.7	724.1	0.00	0.00	0.00
3,800.0	16.46	221.07	3,698.8	-567.3	-494.4	752.5	0.00	0.00	0.00
3,900.0	16.46	221.07	3,794.7	-588.7	-513.0	780.8	0.00	0.00	0.00
4,000.0	16.46	221.07	3,890.5	-610.0	-531.6	809.2	0.00	0.00	0.00
4,100.0	16.46	221.07	3,986.4	-631.4	-550.2	837.5	0.00	0.00	0.00
4,200.0	16.46	221.07	4,082.3	-652.8	-568.8	865.8	0.00	0.00	0.00
4,300.0	16.46	221.07	4,178.2	-674.1	-587.5	894.2	0.00	0.00	0.00
4,400.0	16.46	221.07	4,274.1	-695.5	-606.1	922.5	0.00	0.00	0.00
4,500.0	16.46	221.07	4,370.0	-716.9	-624.7	950.9	0.00	0.00	0.00
4,600.0	16.46	221.07	4,465.9	-738.2	-643.3	979.2	0.00	0.00	0.00
4,700.0	16.46	221.07	4,561.8	-759.6	-661.9	1,007.6	0.00	0.00	0.00
4,800.0	16.46	221.07	4,657.7	-781.0	-680.6	1,035.9	0.00	0.00	0.00
4,900.0	16.46	221.07	4,753.6	-802.3	-699.2	1,064.2	0.00	0.00	0.00
5,000.0	16.46	221.07	4,849.5	-823.7	-717.8	1,092.6	0.00	0.00	0.00
5,100.0	16.46	221.07	4,945.4	-845.1	-736.4	1,120.9	0.00	0.00	0.00
5,200.0	16.46	221.07	5,041.3	-866.4	-755.0	1,149.3	0.00	0.00	0.00



Payzone Directional

Planning Report



Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well Q-26-8-17
Company:	NEWFIELD EXPLORATION	TVD Reference:	Q-26-8-17 @ 5072.0ft (Original Well Elev)
Project:	USGS Myton SW (UT)	MD Reference:	Q-26-8-17 @ 5072.0ft (Original Well Elev)
Site:	SECTION 26 T8, R17	North Reference:	True
Well:	Q-26-8-17	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,300.0	16.46	221.07	5,137.2	-887.8	-773.7	1,177.6	0.00	0.00	0.00
5,400.0	16.46	221.07	5,233.1	-909.2	-792.3	1,205.9	0.00	0.00	0.00
5,417.6	16.46	221.07	5,250.0	-912.9	-795.6	1,210.9	0.00	0.00	0.00
5,500.0	16.46	221.07	5,329.0	-930.5	-810.9	1,234.3	0.00	0.00	0.00
5,600.0	16.46	221.07	5,424.9	-951.9	-829.5	1,262.6	0.00	0.00	0.00
5,700.0	16.46	221.07	5,520.8	-973.3	-848.1	1,291.0	0.00	0.00	0.00
5,800.0	16.46	221.07	5,616.7	-994.6	-866.8	1,319.3	0.00	0.00	0.00
5,900.0	16.46	221.07	5,712.6	-1,016.0	-885.4	1,347.7	0.00	0.00	0.00
6,000.0	16.46	221.07	5,808.5	-1,037.4	-904.0	1,376.0	0.00	0.00	0.00
6,100.0	16.46	221.07	5,904.4	-1,058.7	-922.6	1,404.3	0.00	0.00	0.00
6,200.0	16.46	221.07	6,000.3	-1,080.1	-941.2	1,432.7	0.00	0.00	0.00
6,300.0	16.46	221.07	6,096.2	-1,101.5	-959.9	1,461.0	0.00	0.00	0.00
6,400.0	16.46	221.07	6,192.1	-1,122.8	-978.5	1,489.4	0.00	0.00	0.00
6,460.3	16.46	221.07	6,250.0	-1,135.7	-989.7	1,506.5	0.00	0.00	0.00





Project: USGS Myton SW (UT)
 Site: SECTION 26 T8, R17
 Well: Q-26-8-17
 Wellbore: Wellbore #1
 Design: Design #1



Azimuths to True North
 Magnetic North: 11.03°

Magnetic Field
 Strength: 52112.5snT
 Dip Angle: 65.80°
 Date: 6/12/2013
 Model: IGRF2010

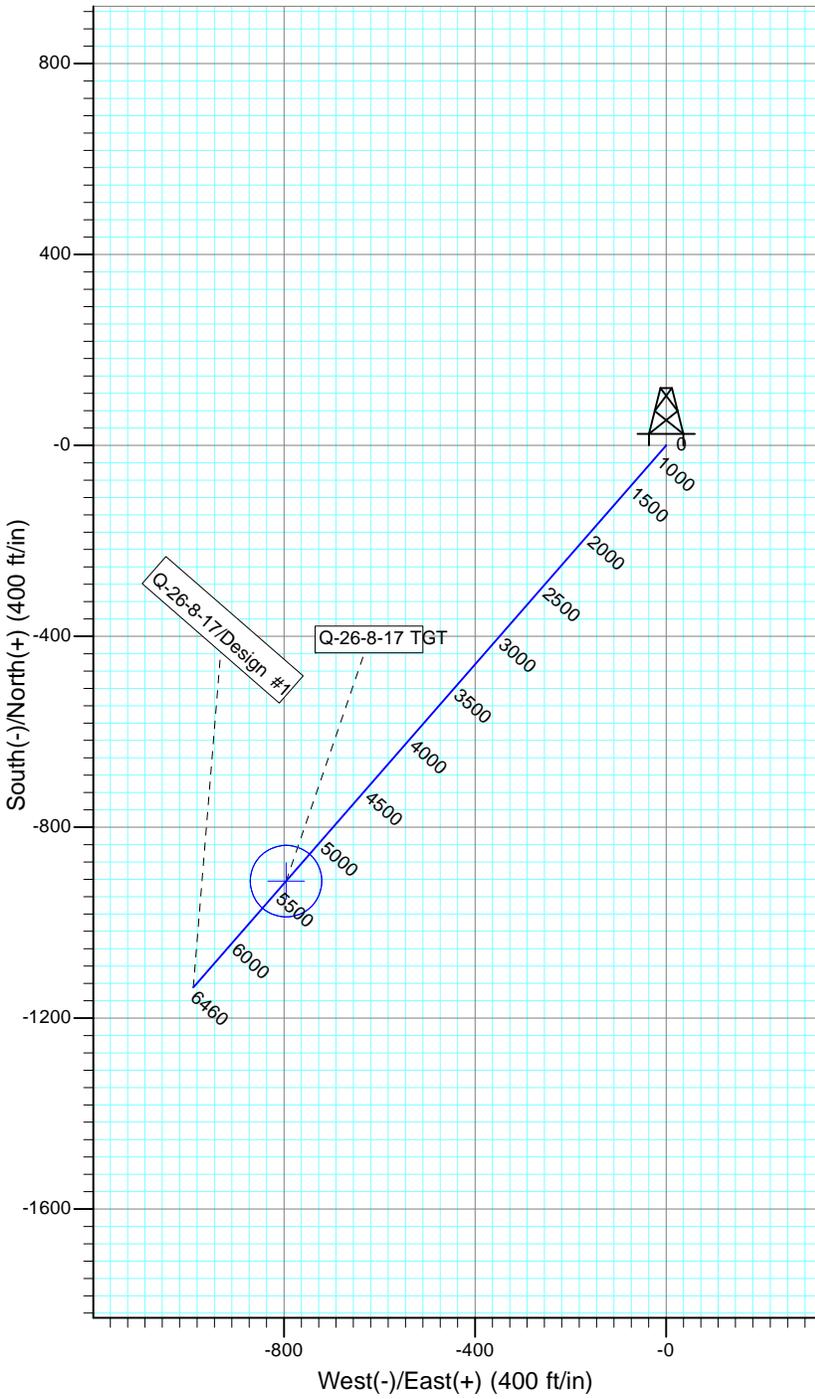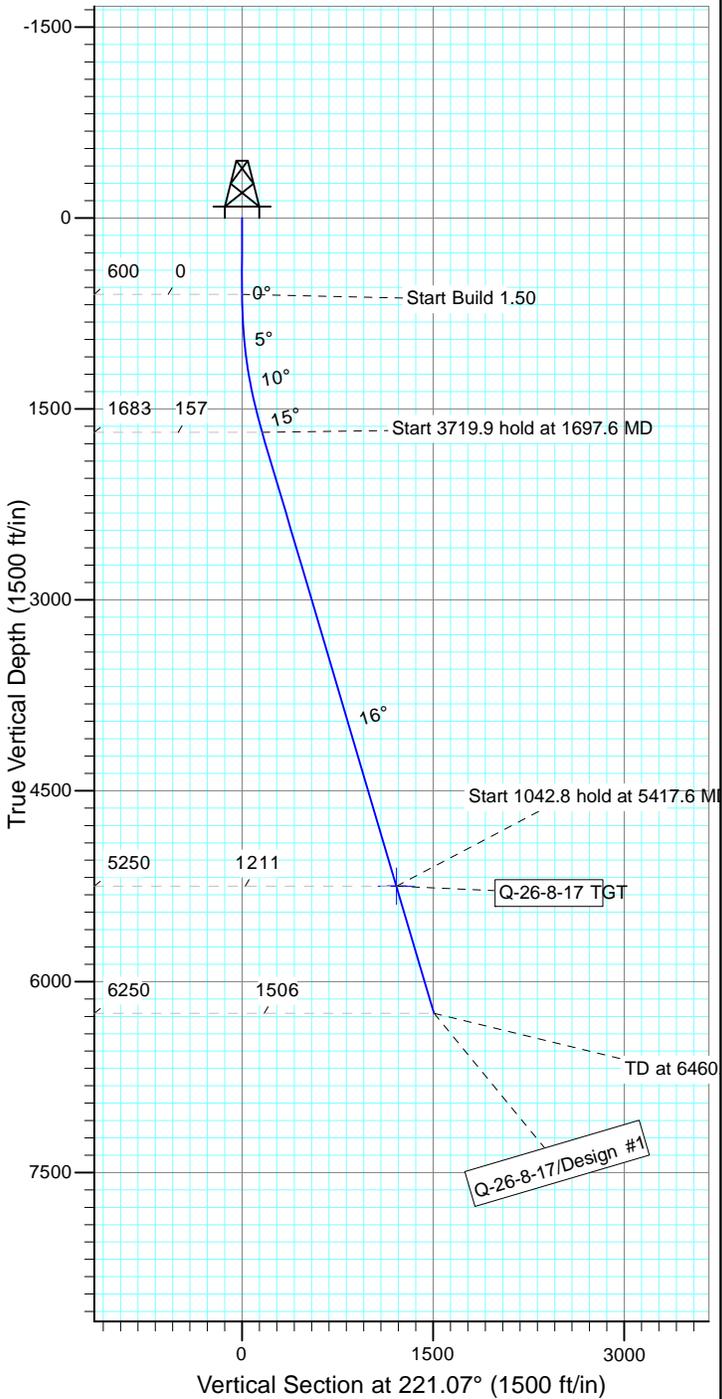

WELLBORE TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Shape
Q-26-8-17 TGT	5250.0	-912.9	-795.6	Circle (Radius: 75.0)

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.0	
3	1697.6	16.46	221.07	1682.6	-118.1	-102.9	1.50	221.07	156.6	
4	5417.6	16.46	221.07	5250.0	-912.9	-795.6	0.00	0.00	1210.9	Q-26-8-17 TGT
5	6460.3	16.46	221.07	6250.0	-1135.7	-989.7	0.00	0.00	1506.5	



**NEWFIELD PRODUCTION COMPANY
GMBU Q-26-8-17
AT SURFACE: NE/SW SECTION 26, T8S R17E
UINTAH COUNTY, UTAH**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site GMBU Q-26-8-17 located in the NE 1/4 SW 1/4 Section 26, T8S, R17E, Uintah County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 – 1.4 miles ± to the junction of this highway and UT State Hwy 53; proceed in a southeasterly direction – 6.9 miles ± to it's junction with an existing road to the east; proceed in a easterly direction – 2.5 miles ± to it's junction with an existing road to the south; proceed in a southerly then easterly direction – 2.9 miles ± to it's junction with the beginning of the access road to the existing 11-26-8-17 well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

2. PLANNED ACCESS ROAD

There is no proposed access road for this location. The proposed well will be drilled directionally off of the existing 11-26-8-17 well pad. See attached **Topographic Map "B"**.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. **LOCATION AND TYPE OF WATER SUPPLY**

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District
Water Right : 43-7478

Maurice Harvey Pond
Water Right: 47-1358

Neil Moon Pond
Water Right: 43-11787

Newfield Collector Well
Water Right: 47-1817 (A30414DVA, contracted with the Duchesne County Conservancy District).

There will be no water well drilled at this site.

6. **SOURCE OF CONSTRUCTION MATERIALS**

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. **METHODS FOR HANDLING WASTE DISPOSAL**

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

8. **ANCILLARY FACILITIES**

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. **WELL SITE LAYOUT**

See attached Location Layout Sheet.

Fencing Requirements

- a) All pits will be fenced or have panels installed consistent with the following minimum standards:
 1. The wire shall be no more than two (2) inches above the ground. If barbed wire is utilized it will be installed three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
 2. Corner posts shall be centered and/or braced in such a manner to keep tight and upright at all times
 3. Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. **PLANS FOR RESTORATION OF SURFACE:**

- a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

- b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. **SURFACE OWNERSHIP** – Bureau of Land Management.

12. **OTHER ADDITIONAL INFORMATION**

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. MOAC Report # 13-060 4/17/13, prepared by Montgomery Archaeological Consultants. . Paleontological Resource Survey prepared by, SWCA Environmental Consultants, Report No. UT13-14273-101, June 2013. See attached report cover pages, Exhibit "D".

Water Disposal

After first production, if the production water meets quality guidelines, it will be transported to the Ashley, Monument Butte, Jonah, South Wells Draw and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project. Water not meeting quality criteria, will be disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), Federally approved surface disposal facilities or at a State of Utah approved surface disposal facilities.

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the GMBU Q-26-8-17, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the GMBU Q-26-8-17, Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

13. **LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:**

Representative

Name: Corie Miller
Address: Newfield Production Company
Route 3, Box 3630
Myton, UT 84052
Telephone: (435) 646-3721

Certification



Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #Q-26-8-17, Section 26, Township 8S, Range 17E: Lease UTU-76240 Uintah County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, Federal Bond #WYB000493.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

8/2/13
Date

Heather Calder
Production Technician
Newfield Production Company

Typical 2M BOP stack configuration

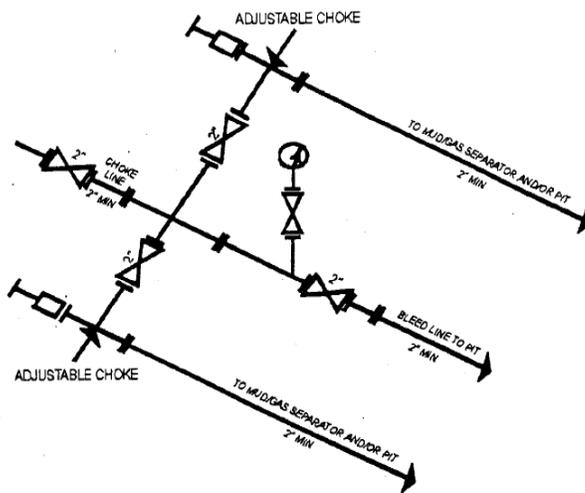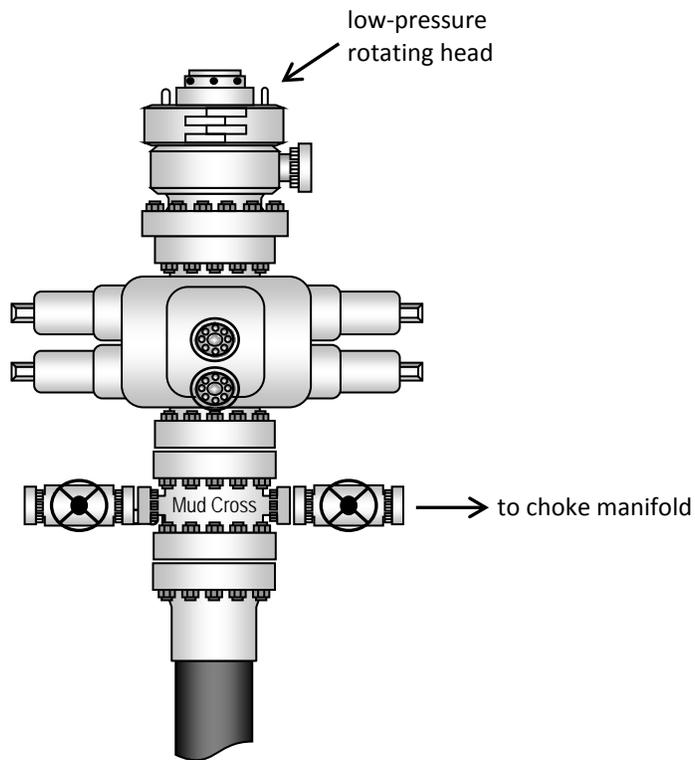

2M CHOKE MANIFOLD EQUIPMENT - CONFIGURATION OF CHOKES MAY VARY

NEWFIELD EXPLORATION COMPANY

WELL PAD INTERFERENCE PLAT

11-26-8-17 (Existing Well)

R-26-8-17 (Proposed Well)

Q-26-8-17 (Proposed Well)

Pad Location: NESW Section 26, T8S, R17E, S.L.B.&M.

TOP HOLE FOOTAGES

R-26-8-17
2230' FSL & 2119' FWL

Q-26-8-17
2222' FSL & 2099' FWL

CENTER OF PATTERN FOOTAGES

R-26-8-17
1320' FSL & 2650' FEL

Q-26-8-17
1320' FSL & 1291' FWL

BOTTOM HOLE FOOTAGES

R-26-8-17
1096' FSL & 2526' FEL

Q-26-8-17
1100' FSL & 1094' FWL

Note:

Bearings are based on GPS Observations.

RELATIVE COORDINATES From Top Hole to C.O.P.

WELL	NORTH	EAST
R-26-8-17	-903'	521'
Q-26-8-17	-913'	-796'


RELATIVE COORDINATES From Top Hole to Bottom Hole

WELL	NORTH	EAST
R-26-8-17	-1124'	648'
Q-26-8-17	-1136'	-990'

LATITUDE & LONGITUDE Surface position of Wells (NAD 83)		
WELL	LATITUDE	LONGITUDE
11-26-8-17	40° 05' 16.03"	109° 58' 31.94"
R-26-8-17	40° 05' 15.95"	109° 58' 32.19"
Q-26-8-17	40° 05' 15.87"	109° 58' 32.44"

LATITUDE & LONGITUDE Center of Pattern (NAD 83)		
WELL	LATITUDE	LONGITUDE
R-26-8-17	40° 05' 06.95"	109° 58' 25.69"
Q-26-8-17	40° 05' 06.99"	109° 58' 42.87"

LATITUDE & LONGITUDE Bottom Hole Position (NAD 83)		
WELL	LATITUDE	LONGITUDE
R-26-8-17	40° 05' 04.74"	109° 58' 24.10"
Q-26-8-17	40° 05' 04.82"	109° 58' 45.42"

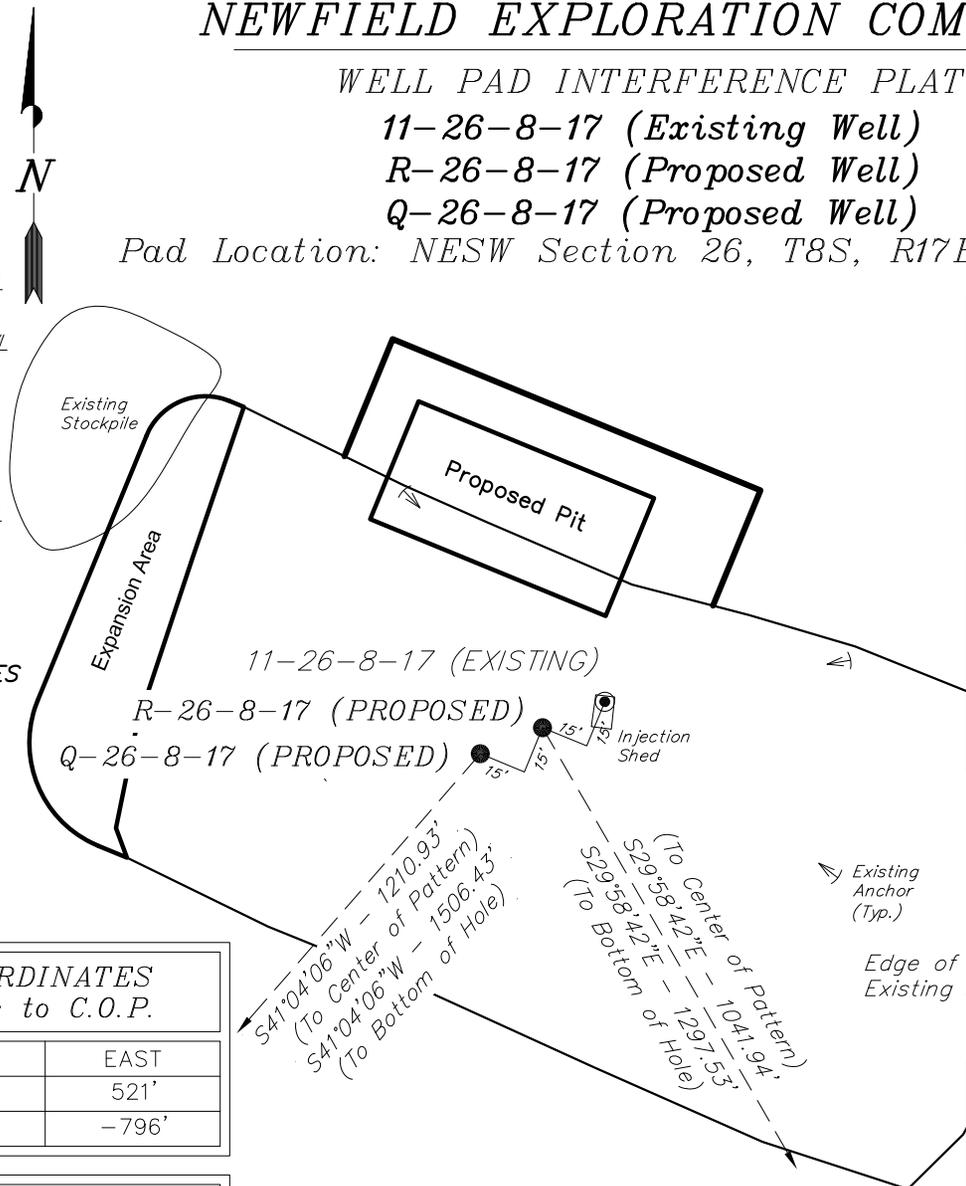

SURVEYED BY: S.H.	DATE SURVEYED: 02-01-13	VERSION:
DRAWN BY: M.W.	DATE DRAWN: 06-13-13	V2
SCALE: 1" = 60'	REVISED:	

Tri State (435) 781-2501
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD EXPLORATION COMPANY



LOCATION LAYOUT

11-26-8-17 (Existing Well)

R-26-8-17 (Proposed Well)

Q-26-8-17 (Proposed Well)

Pad Location: NESW Section 26, T8S, R17E, S.L.B.&M.

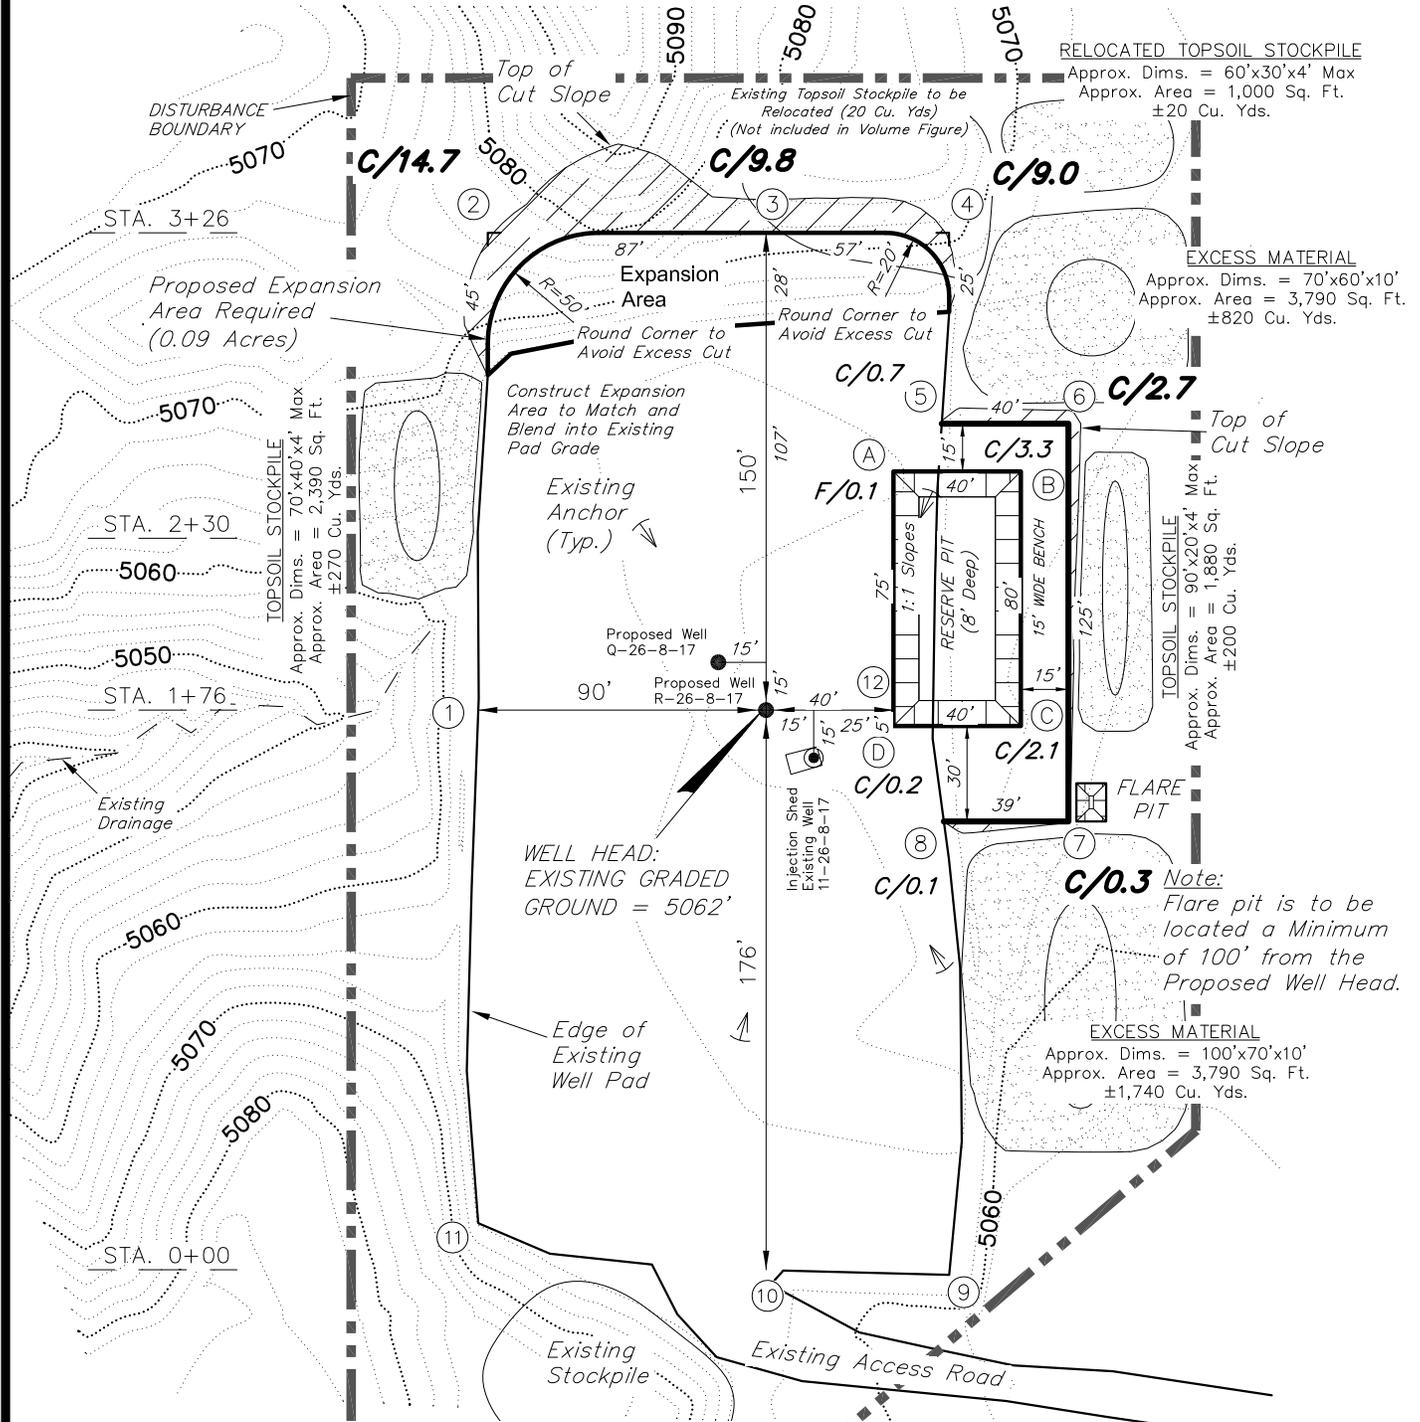

NOTE:
The topsoil & excess material areas are calculated as being mounds containing 3,030 cubic yards of dirt (a 10% fluff factor is included). The mound areas are calculated with push slopes of 1.5:1 & fall slopes of 1.5:1.

Note:
Topsoil to be Stripped from all New Construction Areas and Proposed Stockpile Locations

SURVEYED BY: S.H.	DATE SURVEYED: 02-01-13	VERSION:
DRAWN BY: M.W.	DATE DRAWN: 06-18-13	V2
SCALE: 1" = 60'	REVISED:	

Tri State (435) 781-2501
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD EXPLORATION COMPANY





CROSS SECTIONS

11-26-8-17 (Existing Well)

R-26-8-17 (Proposed Well)

Q-26-8-17 (Proposed Well)

Pad Location: NESW Section 26, T8S, R17E, S.L.B.&M.

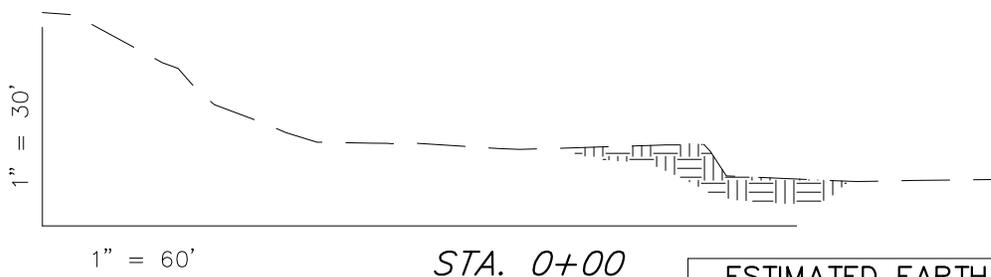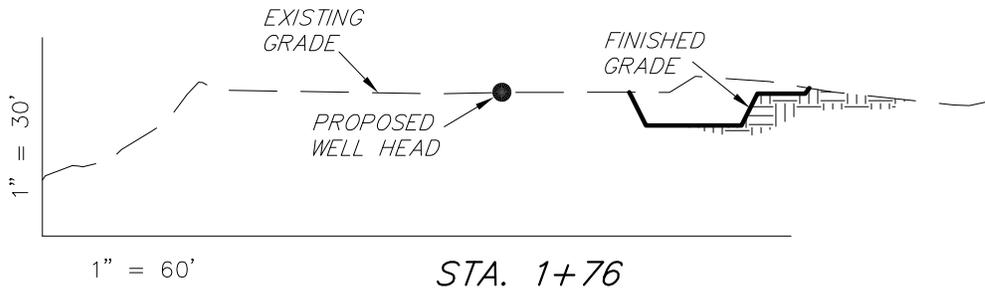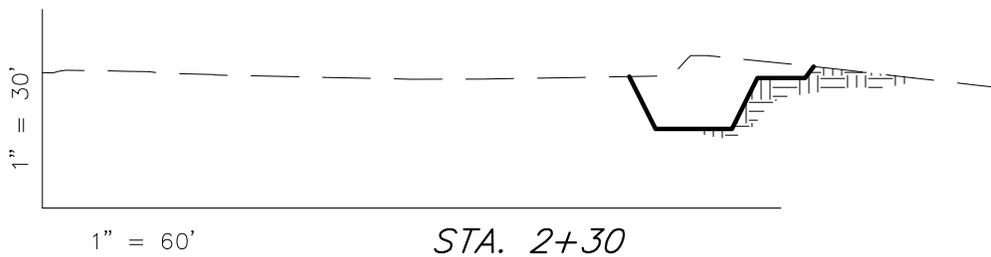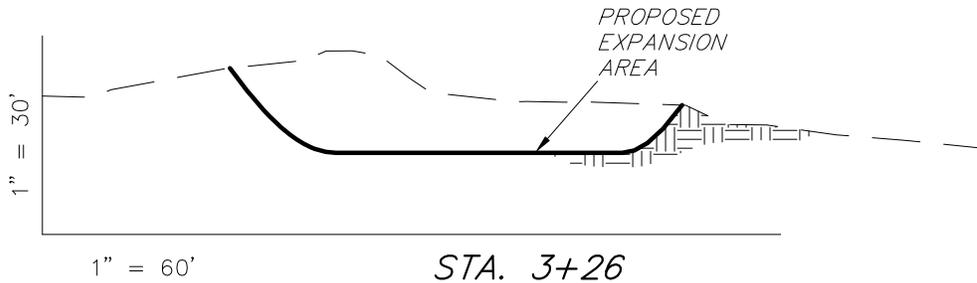

ESTIMATED EARTHWORK QUANTITIES
(No Shrink or swell adjustments have been used)
(Expressed in Cubic Yards)

ITEM	CUT	FILL	6" TOPSOIL	EXCESS
PAD	1,640	0	Topsoil is not included in Pad Cut	1,640
PIT	690	0		690
TOTALS	2,330	0	420	2,330

NOTE:
UNLESS OTHERWISE
NOTED ALL CUT/FILL
SLOPES ARE AT 1.5:1

SURVEYED BY: S.H.	DATE SURVEYED: 02-01-13	VERSION:
DRAWN BY: M.W.	DATE DRAWN: 06-18-13	V2
SCALE: 1" = 60'	REVISED:	

(435) 781-2501

Tri State
Land Surveying, Inc.
180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD EXPLORATION COMPANY


RECLAMATION LAYOUT

11-26-8-17 (Existing Well)


R-26-8-17 (Proposed Well)

Q-26-8-17 (Proposed Well)

Pad Location: *NESW Section 26, T8S, R17E, S.L.B.&M.*



DISTURBANCE BOUNDARY

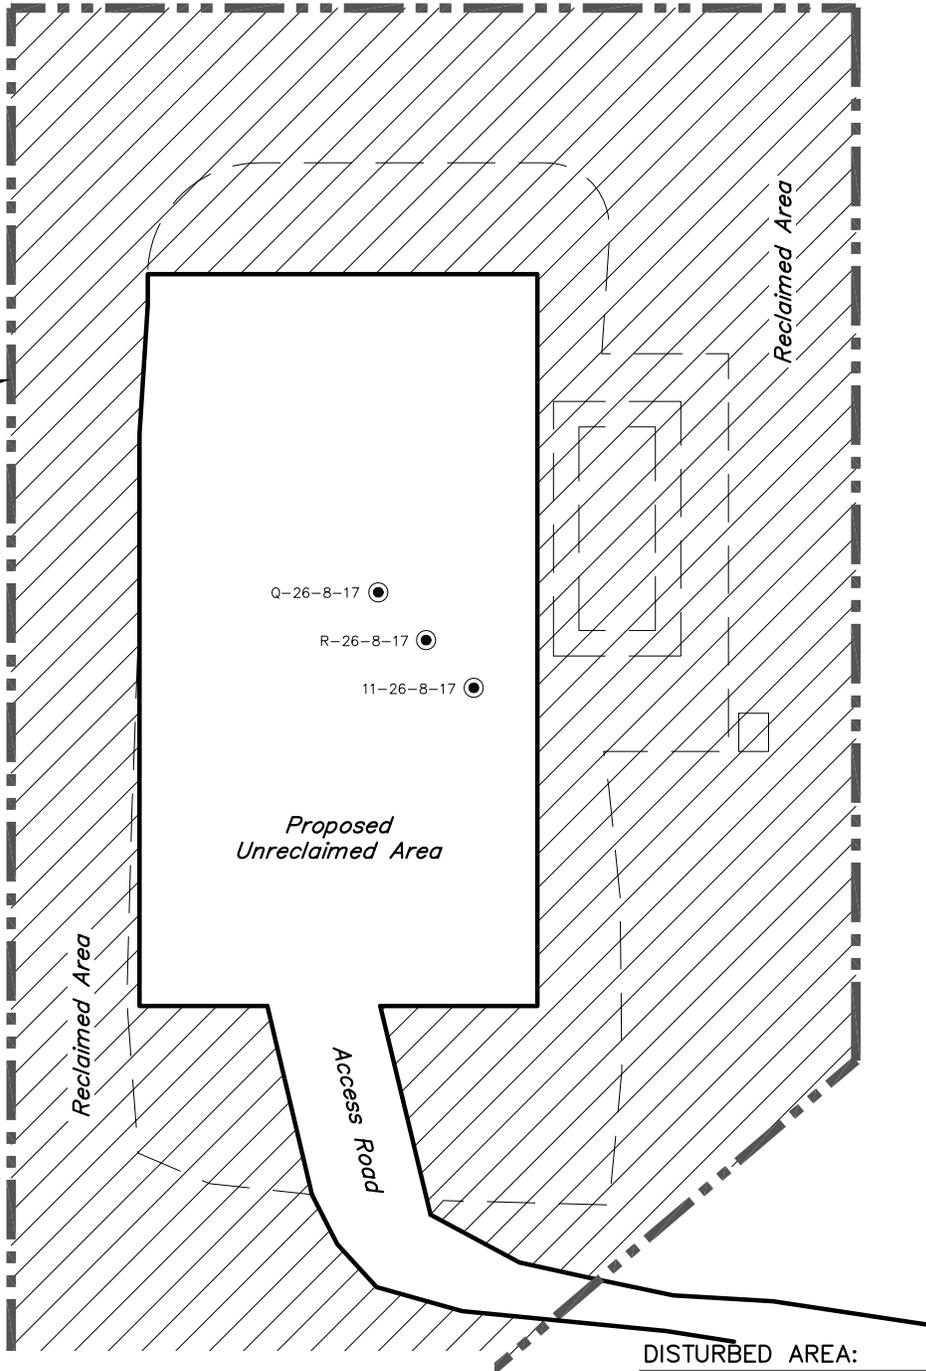

Notes:

1. Reclaimed Area to Include Seeding of Approved Vegetation and Sufficient Storm Water Management System.
2. Actual Equipment Layout and Reclaimed Pad Surface Area May Change due to Production Requirements or Site Conditions.

DISTURBED AREA:

TOTAL DISTURBED AREA = ±2.56 ACRES
 TOTAL RECLAIMED AREA = ±1.81 ACRES
 UNRECLAIMED AREA = ±0.75 ACRES

SURVEYED BY: S.H.	DATE SURVEYED: 02-01-13	VERSION:
DRAWN BY: M.W.	DATE DRAWN: 06-18-13	V2
SCALE: 1" = 60'	REVISED:	

Tri State (435) 781-2501
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

NEWFIELD EXPLORATION COMPANY


PROPOSED SITE FACILITY DIAGRAM

11-26-8-17

R-26-8-17 UTU-76240

Q-26-8-17 UTU-76240

Pad Location: NESW Section 26, T8S, R17E, S.L.B.&M.
 Uintah County, Utah

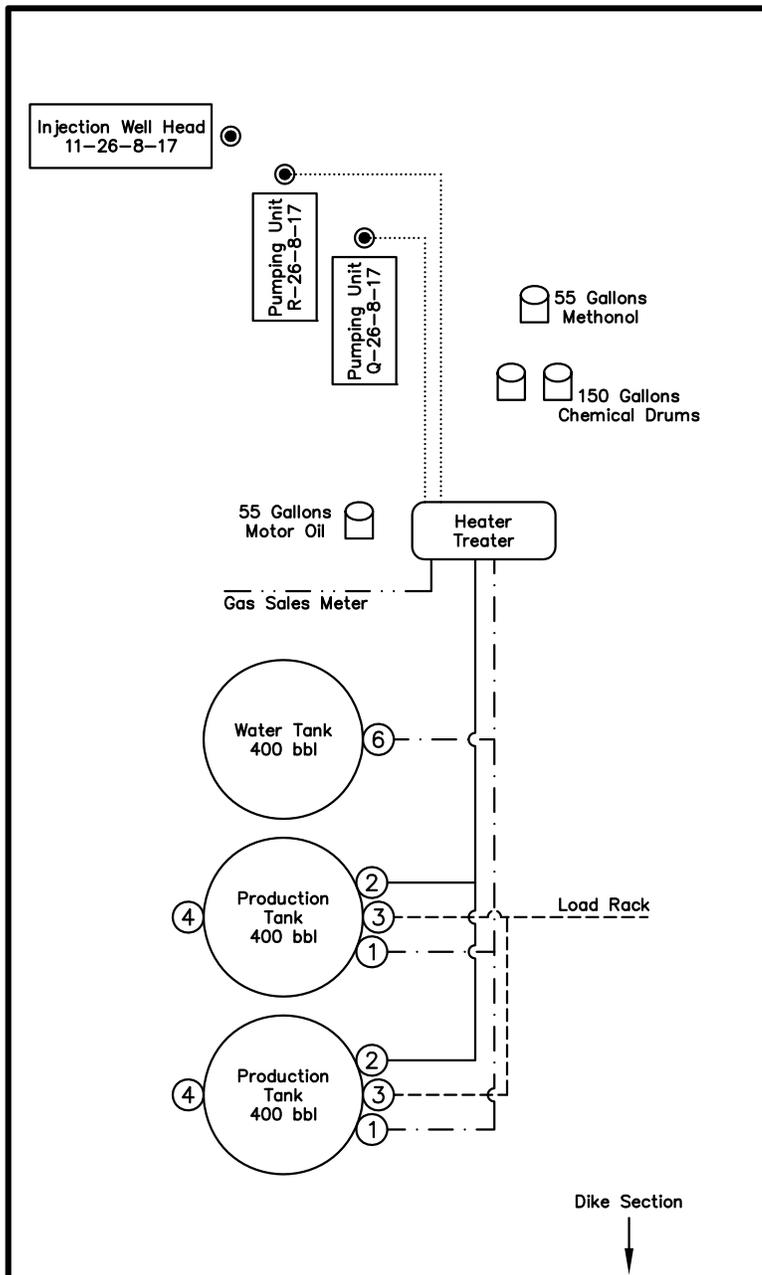


Legend

Emulsion Line
Load Rack	-----
Water Line
Gas Sales
Oil Line	-----

NOT TO SCALE



SURVEYED BY: S.H.	DATE SURVEYED: 02-01-13	VERSION:
DRAWN BY: M.W.	DATE DRAWN: 06-18-13	V2
SCALE: NONE	REVISED:	

Tri State (435) 781-2501
 Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

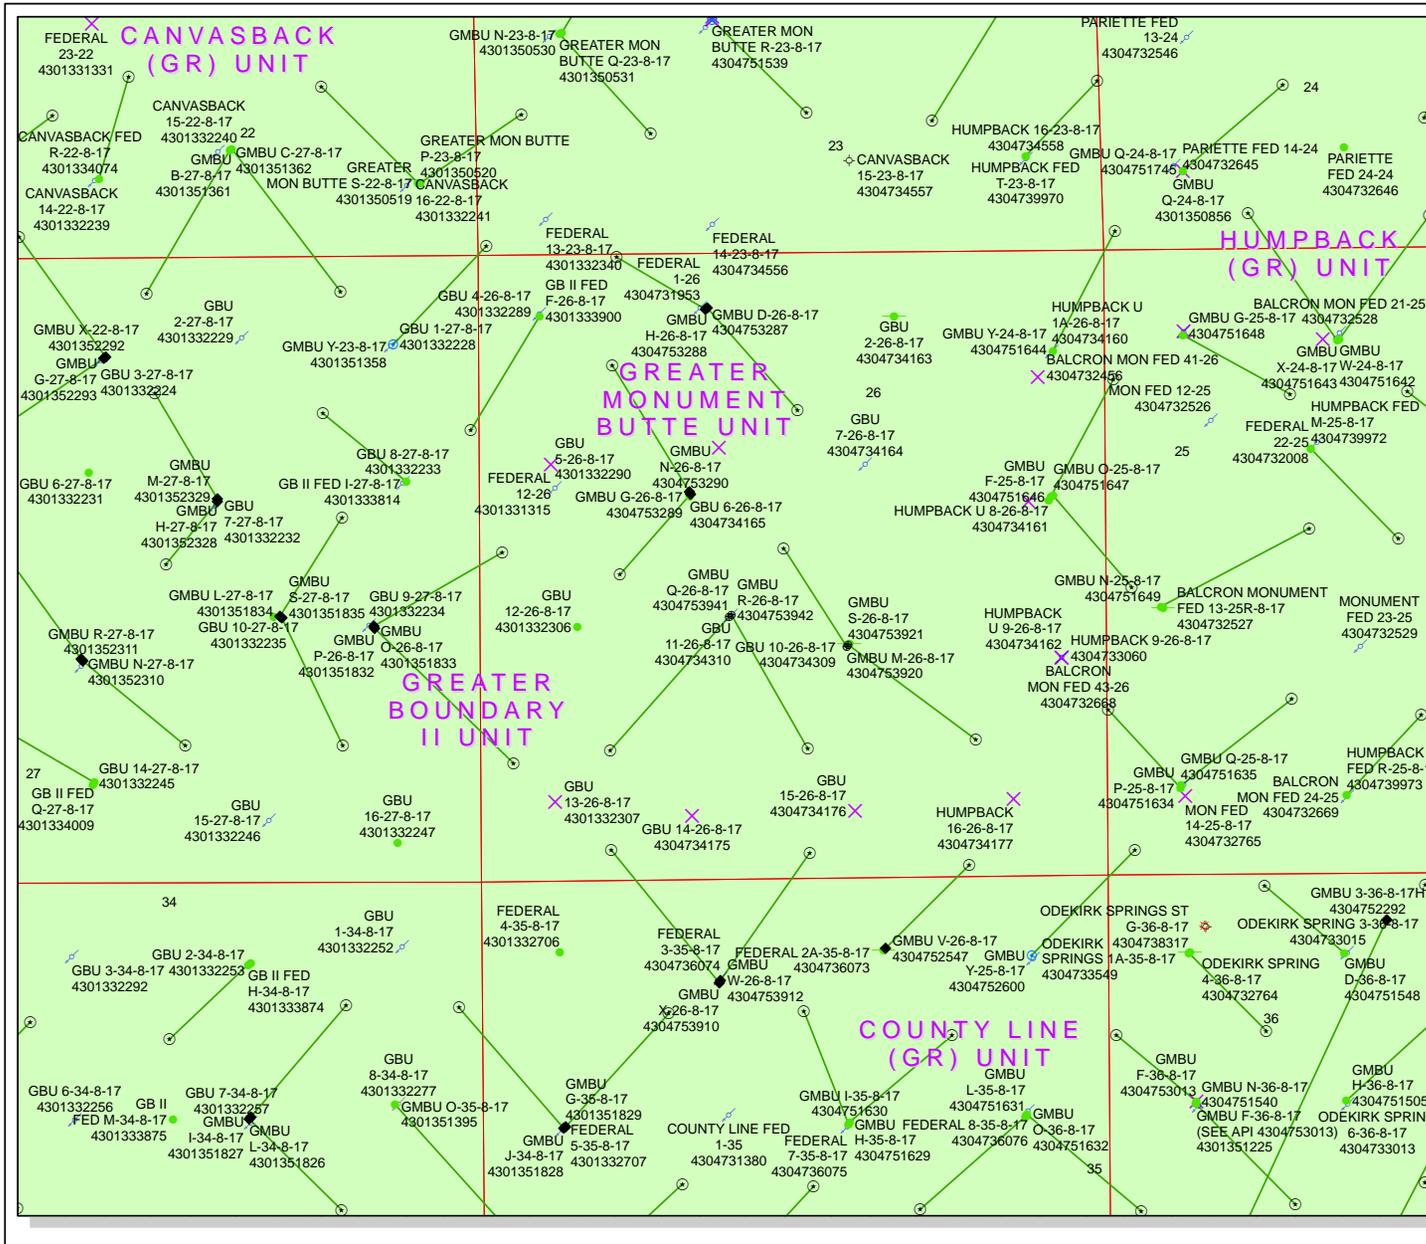

API Number: 4304753941
Well Name: GMBU Q-26-8-17
Township T08.0S Range R17.0E Section 26
Meridian: SLBM
Operator: NEWFIELD PRODUCTION COMPANY

Map Prepared:
 Map Produced by Diana Mason



NEWFIELD



VIA ELECTRONIC DELIVERY

Newfield Exploration Company

1001 17th Street | Suite 2000

Denver, Colorado 80202

PH 303-893-0102 | FAX 303-893-0103

August 12, 2013

State of Utah, Division of Oil, Gas and Mining
ATTN: Diana Mason
P.O. Box 145801
Salt Lake City, UT 84114-5801

RE: Directional Drilling
GMBU Q-26-8-17
Greater Monument Butte (Green River) Unit

Surface Hole: T8S-R17E Section 26: NESW (UTU-76240)
2222' FSL 2099' FWL

At Target: T8S-R17E Section 26: SWSW (UTU-76241)
1100' FSL 1094' FWL

Uintah and Duchesne Counties, Utah

Dear Ms. Mason:

Pursuant to the filing by Newfield Production Company (NPC) of an Application for Permit to Drill the above referenced well dated 8/6/2013, a copy of which is attached, and in accordance with Oil and Gas Conservation Rule R649-3-11, NPC hereby submits this letter as notice of our intention to directionally drill this well.

The surface hole and target locations of this well are both within the boundaries of the Greater Monument Butte Unit (UTU-87538X), of which Newfield certifies that it is the operator. Further, Newfield certifies that all lands within 460 feet of the entire directional well bore are within the Greater Monument Butte Unit.

NPC is permitting this well as a directional well in order to mitigate surface disturbance by utilizing pre-existing roads and pipelines.

NPC hereby requests our application for permit to drill be granted pursuant to R649-3-11. If you have any questions or require further information, please contact the undersigned at 303-383-4121 or by email at lburget@newfield.com. Your consideration in this matter is greatly appreciated.

Sincerely,
Newfield Production Company

A handwritten signature in blue ink that reads "Leslie Burget".

Leslie Burget
Land Associate

Form 3160-3
(August 2007)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0136
Expires July 31, 2010

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU76240
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator NEWFIELD EXPLORATION		7. If Unit or CA Agreement, Name and No. GMBU
Contact: HEATHER CALDER E-Mail: hcalder@newfield.com		8. Lease Name and Well No. GMBU Q-26-8-17
3a. Address ROUTE 3 BOX 3630 MYTON, UT 84052	3b. Phone No. (include area code) Ph: 435-646-4936 Fx: 435-646-4936	9. API Well No.
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NESW 2222FSL 2099FWL At proposed prod. zone SWSW 1100FSL 1094FWL		10. Field and Pool, or Exploratory MONUMENT BUTTE
14. Distance in miles and direction from nearest town or post office* 13.7 MILES SOUTH OF MYTON, UT		11. Sec., T., R., M., or Blk. and Survey or Area Sec 26 T8S R17E Mer SLB
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1094'	16. No. of Acres in Lease 360.00	12. County or Parish UINTAH
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 1291'	19. Proposed Depth 6460 MD 6250 TVD	13. State UT
21. Elevations (Show whether DF, KB, RT, GL, etc.) 5062 GL	22. Approximate date work will start 09/01/2013	17. Spacing Unit dedicated to this well 20.00
		20. BLM/BIA Bond No. on file WYB000493
		23. Estimated duration 7 DAYS

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|--|--|
| <ol style="list-style-type: none"> 1. Well plat certified by a registered surveyor. 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | <ol style="list-style-type: none"> 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 5. Operator certification 6. Such other site specific information and/or plans as may be required by the authorized officer. |
|--|--|

25. Signature (Electronic Submission)	Name (Printed/Typed) HEATHER CALDER Ph: 435-646-4936	Date 08/06/2013
Title PRODUCTION TECHNICIAN		
Approved by (Signature)	Name (Printed/Typed)	Date
Title	Office	

Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

**Electronic Submission #216069 verified by the BLM Well Information System
For NEWFIELD EXPLORATION, sent to the Vernal**

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****


API Well Number: 43047539410000

Additional Operator Remarks:

SURFACE HOLE LEASE:UTU76240
BOTTOM HOLE LEASE:UTU76241


T8S, R17E, S.L.B.&M.

NEWFIELD EXPLORATION COMPANY

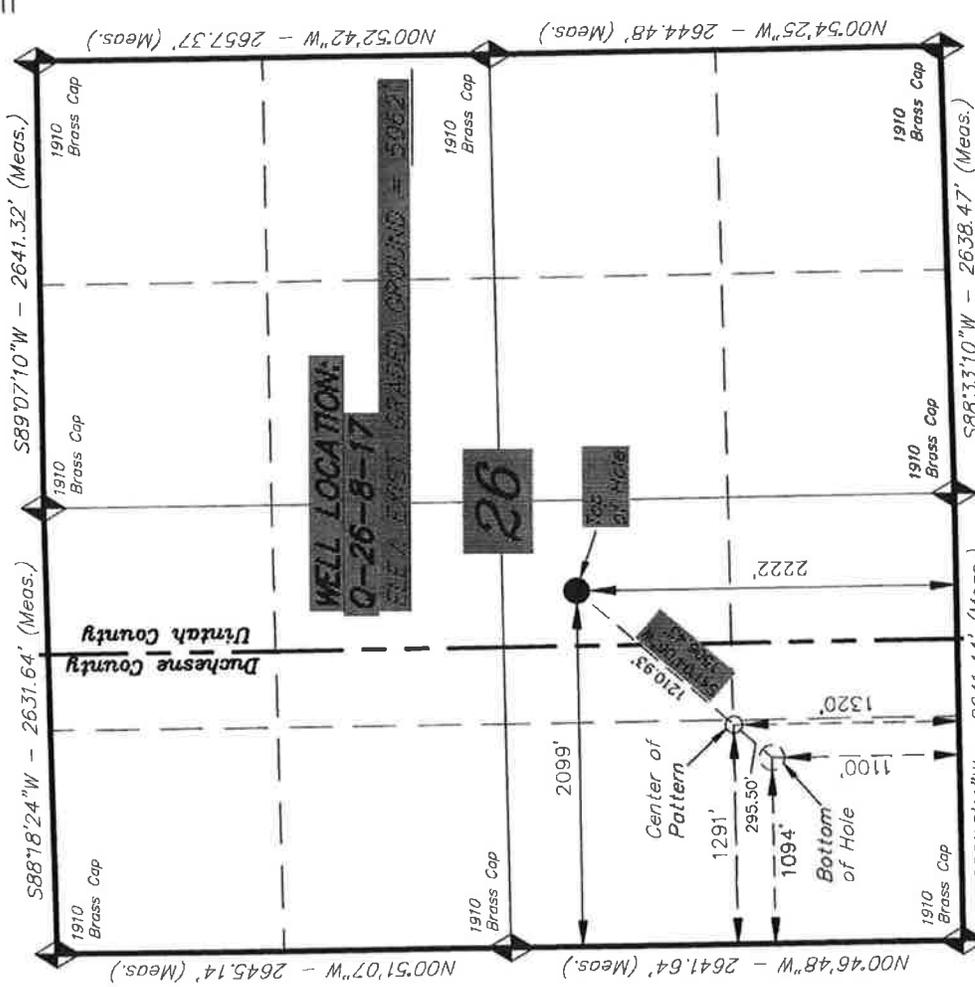

WELL LOCATION, Q-26-8-17, LOCATED AS SHOWN IN THE NE 1/4 SW 1/4 OF SECTION 26, T8S, R17E, S.L.B.&M. UTAH COUNTY, UTAH.

TARGET BOTTOM HOLE, Q-26-8-17, LOCATED AS SHOWN IN THE SW 1/4 SW 1/4 OF SECTION 26, T8S, R17E, S.L.B.&M. DUCHESNE COUNTY, UTAH.



- NOTES:**
- Well footages are measured at right angles to the Section Lines.
 - Bearings are based on Global Positioning Satellite observations.

THIS IS TO CERTIFY THAT THE ABOVE WELL WAS PREPARED FROM FIELD SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

REGISTERED LAND SURVEYOR
 STACY W. STACY W.
 06-19-13
 BEING 6,189,377
 STATE OF UTAH


TRI STATE LAND SURVEYING & CONSULTING
 180 NORTH VERNAL AVE. - VERNAL, UTAH 84078
 (+35) 781-2501

DATE SURVEYED: 02-01-13	SURVEYED BY: S.H.	VERSION: V2
DATE DRAWN: 06-19-13	DRAWN BY: M.W.	
REVISED:	SCALE: 1" = 1000'	

NAD 83 (SURFACE LOCATION)	LATITUDE = 40°05'15.87"
	LONGITUDE = 109°58'32.44"
NAD 27 (SURFACE LOCATION)	LATITUDE = 40°05'16.01"
	LONGITUDE = 109°58'29.91"
NAD 83 (CENTER OF PATTERN)	LATITUDE = 40°05'06.39"
	LONGITUDE = 109°58'42.87"
NAD 27 (CENTER OF PATTERN)	LATITUDE = 40°05'07.12"
	LONGITUDE = 109°58'40.34"
NAD 83 (BOTTOM HOLE LOCATION)	LATITUDE = 40°05'04.82"
	LONGITUDE = 109°58'45.42"
NAD 27 (BOTTOM HOLE LOCATION)	LATITUDE = 40°05'04.96"
	LONGITUDE = 109°58'42.89"

SECTION CORNERS LOCATED

BASIS OF ELEV; Elevations are based on cn N.G.S. OPUS Correction. LOCATION: LAT. 40°04'09.56" LONG. 110°00'43.28" (Tristate Aluminum Cap) Elev. 5281.57'

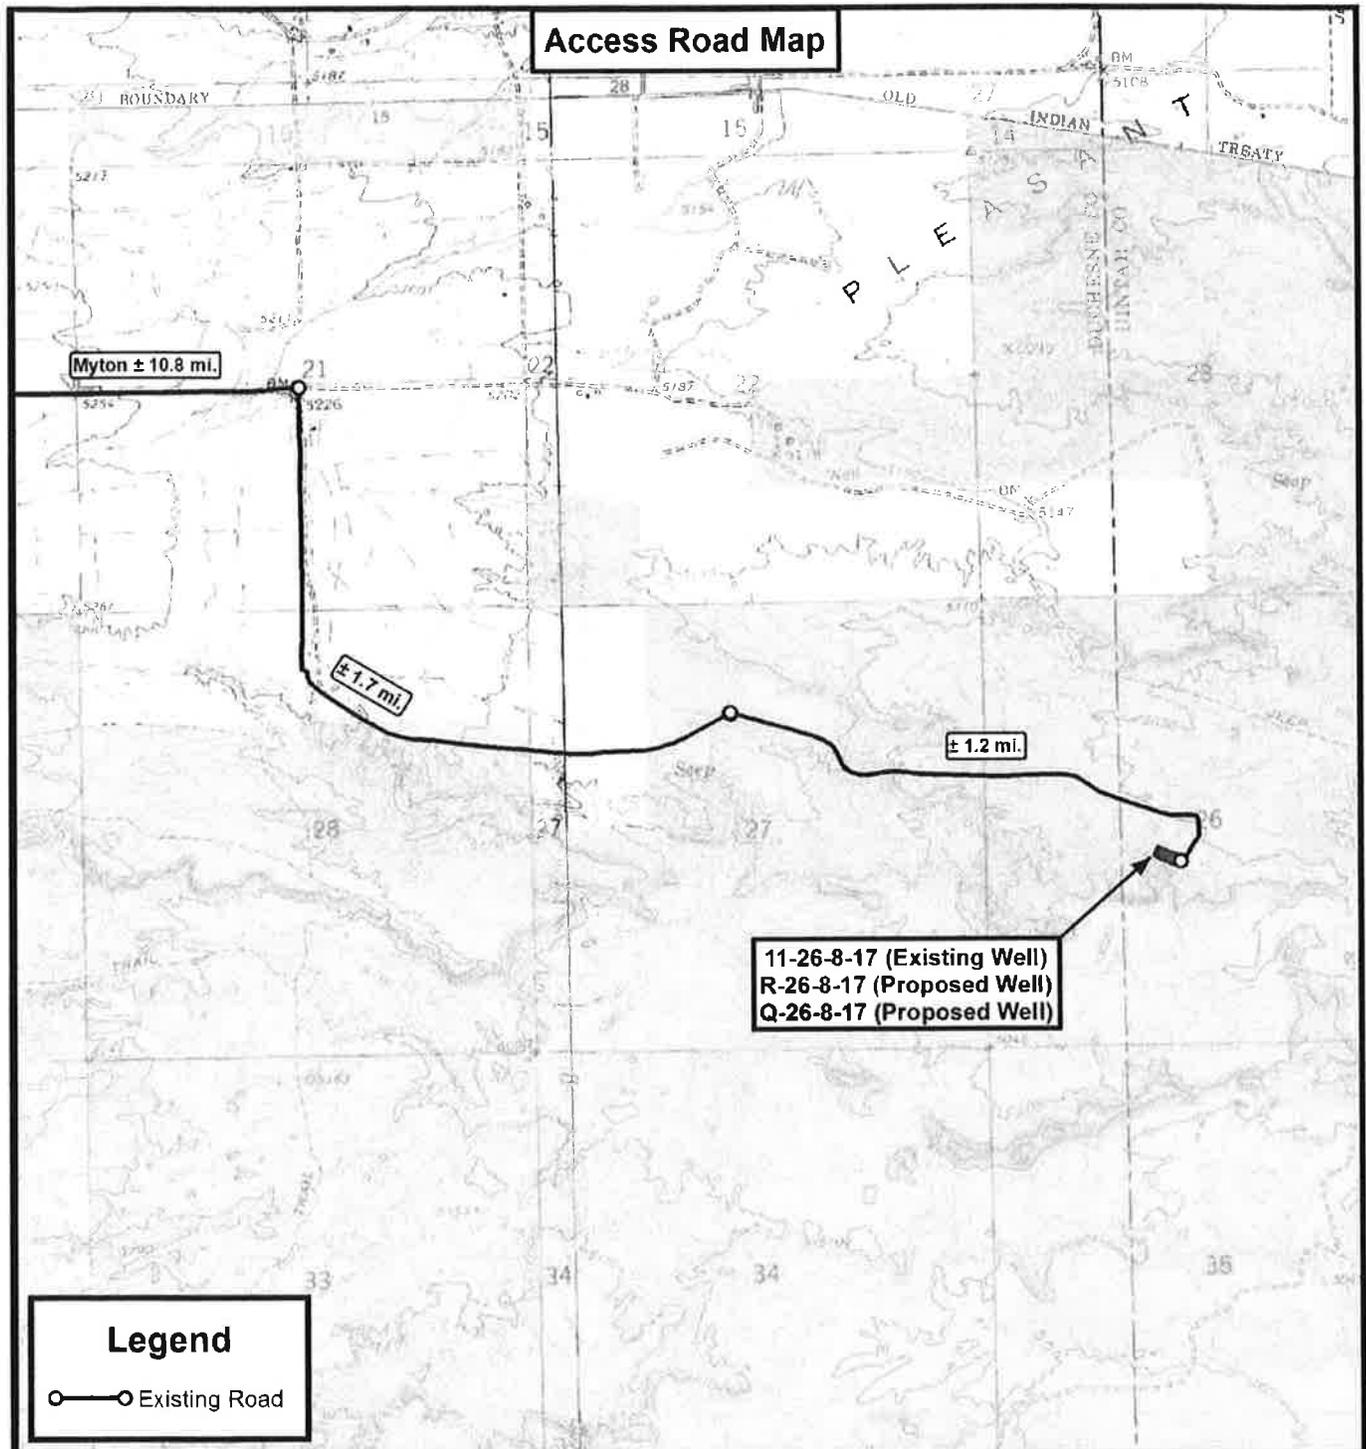

Legend

—○— Existing Road

THE PARCEL INFORMATION SHOWN HAS NOT BEEN SURVEYED BY TRI-STATE LAND SURVEYING, INC. - TRI-STATE DOES NOT WARRANTY PROPERTY PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.

Tri State
Land Surveying, Inc.
 180 NORTH VERNAL AVE. VERNAL, UTAH 84078

P: (435) 781-2501
 F: (435) 781-2518



NEWFIELD EXPLORATION COMPANY

11-26-8-17 (Existing Well)
 R-26-8-17 (Proposed Well)
 Q-26-8-17 (Proposed Well)
 Sec. 26, T8S, R17E, S.L.B.&M. Uintah County, UT.

DRAWN BY:	A.P.C.	REVISED:	VERSION:
DATE:	06-18-2013		V2
SCALE:	1" = 2,000'		

TOPOGRAPHIC MAP

SHEET
B

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
440 West 200 South, Suite 500
Salt Lake City, UT 84101

IN REPLY REFER TO:
3160
(UT-922)

August 13, 2013

Memorandum

To: Assistant Field Office Manager Minerals,
Vernal Field Office

From: Michael Coulthard, Petroleum Engineer

Subject: 2013 Plan of Development Greater Monument
Butte Unit, Duchesne and Uintah Counties,
Utah.

Pursuant to email between Diana Mason, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2013 within the Greater Monument Butte Unit, Duchesne and Uintah Counties, Utah.

API #	WELL NAME	LOCATION
(Proposed PZ GREEN RIVER)		
43-013-52336	GMBU U-8-9-16	Sec 16 T09S R16E 0674 FNL 0836 FWL BHL Sec 08 T09S R16E 0273 FSL 0094 FEL
43-013-52356	GMBU R-19-9-16	Sec 19 T09S R16E 1913 FSL 2144 FEL BHL Sec 19 T09S R16E 1002 FSL 2599 FEL
43-013-52357	GMBU N-19-9-16	Sec 19 T09S R16E 1788 FSL 2207 FWL BHL Sec 19 T09S R16E 2313 FNL 1036 FWL
43-013-52358	GMBU M-19-9-16	Sec 19 T09S R16E 1794 FSL 2227 FWL BHL Sec 19 T09S R16E 2425 FNL 2531 FEL
43-013-52359	GMBU R-23-9-15	Sec 23 T09S R15E 1958 FSL 1928 FWL BHL Sec 23 T09S R15E 1129 FSL 2487 FEL
43-013-52360	GMBU M-23-9-15	Sec 23 T09S R15E 1977 FSL 1919 FWL BHL Sec 23 T09S R15E 2580 FNL 2465 FEL
43-013-52361	GMBU Q-22-9-15	Sec 22 T09S R15E 1879 FSL 1542 FWL BHL Sec 22 T09S R15E 0996 FSL 0904 FWL
43-013-52362	GMBU R-22-9-15	Sec 22 T09S R15E 1882 FSL 1563 FWL BHL Sec 22 T09S R15E 1123 FSL 2420 FEL
43-013-52363	GMBU R-13-9-15	Sec 13 T09S R15E 1773 FSL 2080 FWL BHL Sec 13 T09S R15E 1096 FSL 2592 FEL
43-013-52364	GMBU M-13-9-15	Sec 13 T09S R15E 1784 FSL 2061 FWL BHL Sec 13 T09S R15E 2540 FNL 2262 FEL

RECEIVED: August 13, 2013

API #	WELL NAME	LOCATION						
(Proposed PZ GREEN RIVER)								
43-013-52365	GMBU S-13-9-15	Sec 13	T09S	R15E	1933	FSL	1921	FEL
		BHL Sec 13	T09S	R15E	1124	FSL	1068	FEL
43-013-52366	GMBU L-13-9-15	Sec 13	T09S	R15E	1936	FSL	1942	FEL
		BHL Sec 13	T09S	R15E	2501	FNL	0947	FEL
43-013-52367	GMBU Y-1-9-15	Sec 11	T09S	R15E	0840	FNL	0483	FEL
		BHL Sec 01	T09S	R15E	0275	FSL	0166	FWL
43-013-52368	GMBU S-19-9-16	Sec 19	T09S	R16E	1929	FSL	2130	FEL
		BHL Sec 19	T09S	R16E	1002	FSL	1025	FEL
43-047-53941	GMBU Q-26-8-17	Sec 26	T08S	R17E	2222	FSL	2099	FWL
		BHL Sec 26	T08S	R17E	1100	FSL	1094	FWL
43-047-53942	GMBU R-26-8-17	Sec 26	T08S	R17E	2230	FSL	2119	FWL
		BHL Sec 26	T08S	R17E	1096	FSL	2526	FEL

This office has no objection to permitting the wells at this time.

Michael Coulthard

Digitally signed by Michael Coulthard
 DN: cn=Michael Coulthard, o=Bureau of Land Management,
 ou=Division of Minerals, email=mcoultha@blm.gov, c=US
 Date: 2013.08.13 11:27:16 -0600

bcc: File - Greater Monument Butte Unit
 Division of Oil Gas and Mining
 Central Files
 Agr. Sec. Chron
 Fluid Chron

MCoulthard:mc:8-13-13

RECEIVED: August 13, 2013

WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 8/5/2013

API NO. ASSIGNED: 43047539410000

WELL NAME: GMBU Q-26-8-17

OPERATOR: NEWFIELD PRODUCTION COMPANY (N2695)

PHONE NUMBER: 435 646-4936

CONTACT: Heather Calder

PROPOSED LOCATION: NESW 26 080S 170E

Permit Tech Review:

SURFACE: 2222 FSL 2099 FWL

Engineering Review:

BOTTOM: 1100 FSL 1094 FWL

Geology Review:

COUNTY: UINTAH

LATITUDE: 40.08773

LONGITUDE: -109.97567

UTM SURF EASTINGS: 587325.00

NORTHINGS: 4437997.00

FIELD NAME: MONUMENT BUTTE

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-76240

PROPOSED PRODUCING FORMATION(S): GREEN RIVER

SURFACE OWNER: 1 - Federal

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

- PLAT
- Bond: FEDERAL - WYB000493
- Potash
- Oil Shale 190-5
- Oil Shale 190-3
- Oil Shale 190-13
- Water Permit: 437478
- RDCC Review:
- Fee Surface Agreement
- Intent to Commingle

Commingle Approved

LOCATION AND SITING:

- R649-2-3.
- Unit: GMBU (GRRV)
- R649-3-2. General
- R649-3-3. Exception
- Drilling Unit
- Board Cause No: Cause 213-11
- Effective Date: 11/30/2009
- Siting: Suspends General Siting
- R649-3-11. Directional Drill

Comments: Presite Completed

Stipulations: 4 - Federal Approval - dmason
15 - Directional - dmason
27 - Other - bhll



GARY R. HERBERT
Governor

GREGORY S. BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: GMBU Q-26-8-17
API Well Number: 43047539410000
Lease Number: UTU-76240
Surface Owner: FEDERAL
Approval Date: 8/15/2013

Issued to:

NEWFIELD PRODUCTION COMPANY , Rt 3 Box 3630 , Myton, UT 84052

Authority:

Pursuant to Utah Code Ann. 40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 213-11. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Production casing cement shall be brought up to or above the top of the unitized interval for the Greater Monument Butte Unit (Cause No. 213-11).

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well - contact Carol Daniels at 801-538-5284

(please leave a voicemail message if not available)

OR

submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website
at <http://oilgas.ogm.utah.gov>

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) - due within 5 days of spudding the well
- Monthly Status Report (Form 9) - due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) - due prior to implementation
- Written Notice of Emergency Changes (Form 9) - due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) - due prior to implementation
- Report of Water Encountered (Form 7) - due within 30 days after completion
- Well Completion Report (Form 8) - due within 30 days after completion or plugging

Approved By:

A handwritten signature in black ink, appearing to read "John Rogers", written over a horizontal line.

For John Rogers
Associate Director, Oil & Gas

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-76240	
SUNDRY NOTICES AND REPORTS ON WELLS	
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	
6. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)	
1. TYPE OF WELL Oil Well	
8. WELL NAME and NUMBER: GMBU Q-26-8-17	
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY	
9. API NUMBER: 43047539410000	
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052	
PHONE NUMBER: 435 646-4825 Ext	
9. FIELD and POOL or WILDCAT: MONUMENT BUTTE	
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2222 FSL 2099 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESW Section: 26 Township: 08.0S Range: 17.0E Meridian: S	
COUNTY: UINTAH	
STATE: UTAH	

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 8/15/2014	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield proposes to extend the Application for Permit to Drill this well.

Approved by the
July 04, 2014
Oil, Gas and Mining

Date: _____
By: 

NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A	DATE 7/10/2014	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047539410000

API: 43047539410000

Well Name: GMBU Q-26-8-17

Location: 2222 FSL 2099 FWL QTR NESW SEC 26 TWNP 080S RNG 170E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 8/15/2013

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Mandie Crozier

Date: 7/10/2014

Title: Regulatory Tech Representing: NEWFIELD PRODUCTION COMPANY

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS	
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	
1. TYPE OF WELL Oil Well	5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-76240
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052	7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)
PHONE NUMBER: 435 646-4825 Ext	8. WELL NAME and NUMBER: GMBU Q-26-8-17
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2222 FSL 2099 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESW Section: 26 Township: 08.0S Range: 17.0E Meridian: S	9. API NUMBER: 43047539410000
	9. FIELD and POOL or WILDCAT: MONUMENT BUTTE
	COUNTY: UINTAH
	STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 8/15/2015	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield proposes to extend the Application for Permit to Drill this well.

Approved by the
August 05, 2015
Oil, Gas and Mining

Date: _____
By:

NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A	DATE 8/4/2015	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047539410000

API: 43047539410000

Well Name: GMBU Q-26-8-17

Location: 2222 FSL 2099 FWL QTR NESW SEC 26 TWNP 080S RNG 170E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 8/15/2013

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Mandie Crozier

Date: 8/4/2015

Title: Regulatory Tech Representing: NEWFIELD PRODUCTION COMPANY

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-76240	
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	
6. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
7. UNIT or CA AGREEMENT NAME: GMBU (GRRV)	
1. TYPE OF WELL Oil Well	
8. WELL NAME and NUMBER: GMBU Q-26-8-17	
2. NAME OF OPERATOR: NEWFIELD PRODUCTION COMPANY	
9. API NUMBER: 43047539410000	
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT, 84052	
PHONE NUMBER: 435 646-4825 Ext	
9. FIELD and POOL or WILDCAT: MONUMENT BUTTE	
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2222 FSL 2099 FWL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESW Section: 26 Township: 08.0S Range: 17.0E Meridian: S	
COUNTY: UINTAH	
STATE: UTAH	

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 8/15/2016	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Newfield proposes to extend the Application for Permit to Drill this well.

Approved by the
July 02, 2016
Oil, Gas and Mining

Date: _____
By: 

NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMBER 435 646-4825	TITLE Regulatory Tech
SIGNATURE N/A	DATE 7/11/2016	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047539410000

API: 43047539410000

Well Name: GMBU Q-26-8-17

Location: 2222 FSL 2099 FWL QTR NESW SEC 26 TWNP 080S RNG 170E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 8/15/2013

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Mandie Crozier

Date: 7/11/2016

Title: Regulatory Tech **Representing:** NEWFIELD PRODUCTION COMPANY