

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL		1. WELL NAME and NUMBER NBU 922-35F4BS
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>		3. FIELD OR WILDCAT NATURAL BUTTES
4. TYPE OF WELL Gas Well Coalbed Methane Well: NO		5. UNIT or COMMUNITIZATION AGREEMENT NAME NATURAL BUTTES
6. NAME OF OPERATOR KERR-MCGEE OIL & GAS ONSHORE, L.P.		7. OPERATOR PHONE 720 929-6515
8. ADDRESS OF OPERATOR P.O. Box 173779, Denver, CO, 80217		9. OPERATOR E-MAIL julie.jacobson@anadarko.com
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) UTU-010954-A	11. MINERAL OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>	
12. SURFACE OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>		13. NAME OF SURFACE OWNER (if box 12 = 'fee')
14. SURFACE OWNER PHONE (if box 12 = 'fee')		15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')
16. SURFACE OWNER E-MAIL (if box 12 = 'fee')		17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')
18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input checked="" type="checkbox"/> (Submit Commingling Application) NO <input type="checkbox"/>		19. SLANT VERTICAL <input type="checkbox"/> DIRECTIONAL <input checked="" type="checkbox"/> HORIZONTAL <input type="checkbox"/>

20. LOCATION OF WELL	FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN
LOCATION AT SURFACE	1972 FNL 1833 FWL	SEnw	35	9.0 S	22.0 E	S
Top of Uppermost Producing Zone	2079 FNL 2150 FWL	SEnw	35	9.0 S	22.0 E	S
At Total Depth	2079 FNL 2150 FWL	SEnw	35	9.0 S	22.0 E	S

21. COUNTY UINTAH	22. DISTANCE TO NEAREST LEASE LINE (Feet) 1991	23. NUMBER OF ACRES IN DRILLING UNIT 600
24. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 425	25. PROPOSED DEPTH MD: 8882 TVD: 8862	
26. ELEVATION - GROUND LEVEL 4988	27. BOND NUMBER WYB000291	28. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 43-8496

Hole, Casing, and Cement Information

String	Hole Size	Casing Size	Length	Weight	Grade & Thread	Max Mud Wt.	Cement	Sacks	Yield	Weight
Surf	11	8.625	0 - 2430	28.0	J-55 LT&C	0.2	Type V	180	1.15	15.8
							Class G	270	1.15	15.8
Prod	7.875	4.5	0 - 8882	11.6	I-80 LT&C	12.0	Premium Lite High Strength	300	3.38	12.0
							50/50 Poz	1190	1.31	14.3


ATTACHMENTS

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES

<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER	<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)	<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER
<input checked="" type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)	<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP

NAME Laura Abrams	TITLE Regulatory Analyst II	PHONE 720 929-6356
SIGNATURE	DATE 10/31/2013	EMAIL Laura.Abrams@anadarko.com
API NUMBER ASSIGNED 43047541340000	APPROVAL  Permit Manager	


T9S, R22E, S.L.B.&M.

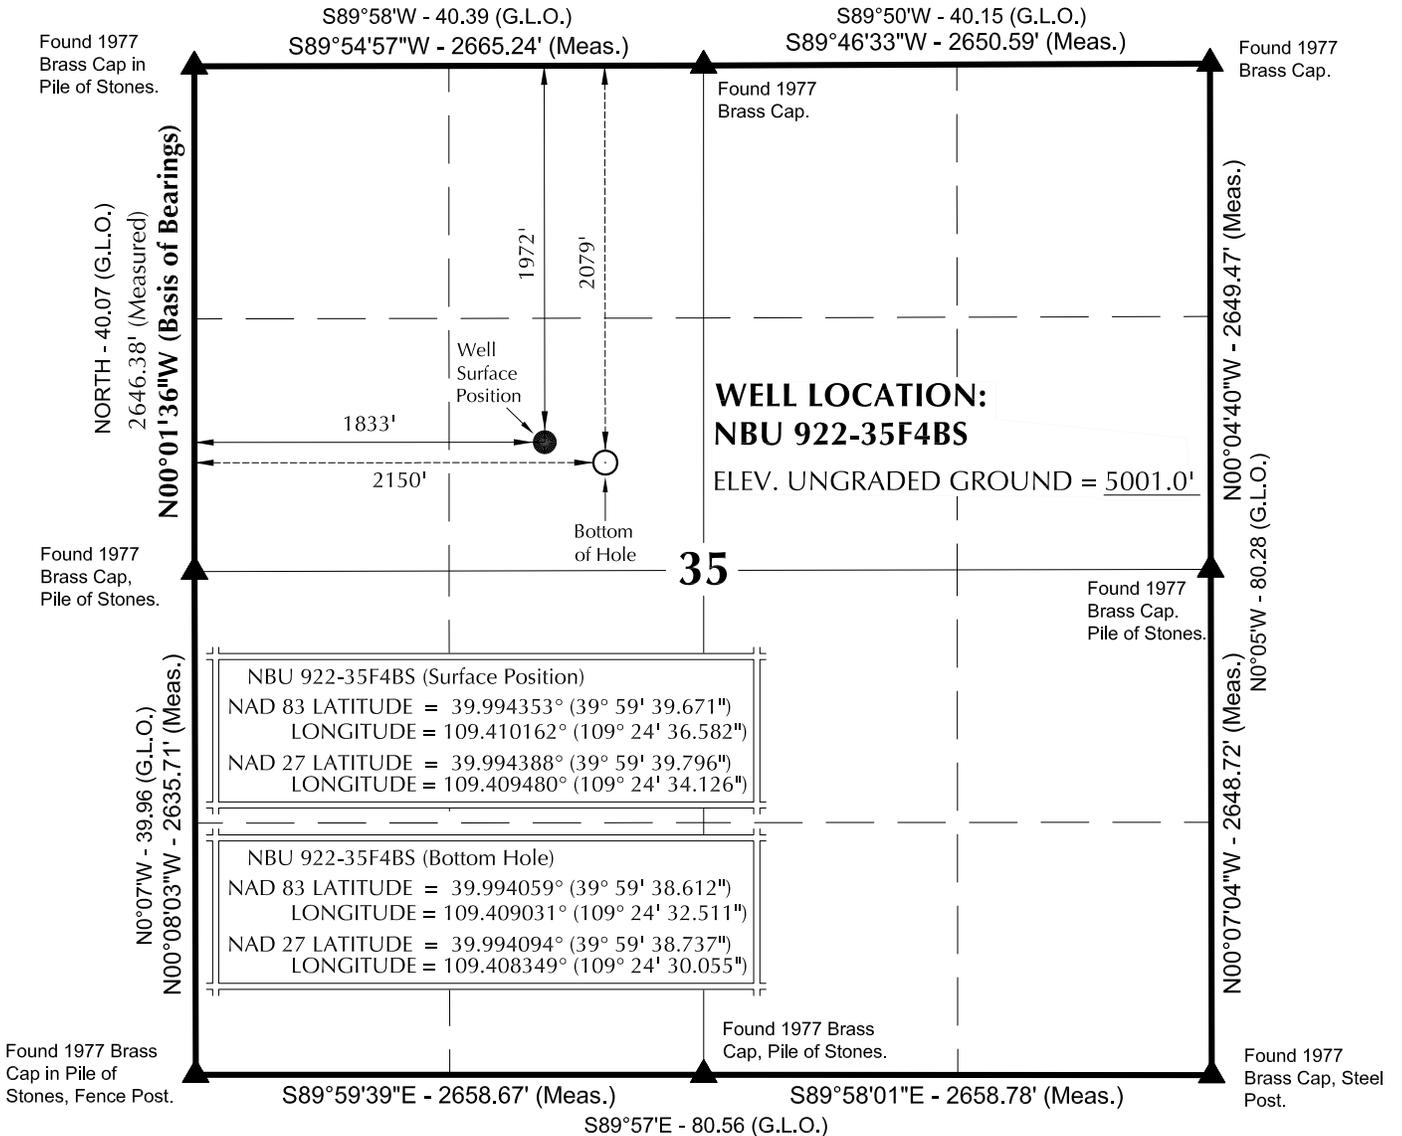

NBU 922-35F4BS (Surface Position)	
NAD 83 LATITUDE =	39.994353° (39° 59' 39.671")
LONGITUDE =	109.410162° (109° 24' 36.582")
NAD 27 LATITUDE =	39.994388° (39° 59' 39.796")
LONGITUDE =	109.409480° (109° 24' 34.126")
NBU 922-35F4BS (Bottom Hole)	
NAD 83 LATITUDE =	39.994059° (39° 59' 38.612")
LONGITUDE =	109.409031° (109° 24' 32.511")
NAD 27 LATITUDE =	39.994094° (39° 59' 38.737")
LONGITUDE =	109.408349° (109° 24' 30.055")

NOTES:

- ▲ = Section Corners Located
- 1. Well footages are measured at right angles to the Section Lines. G.L.O. distances are shown in feet or chains.
- 2. 1 chain = 66 feet.
- 3. The Bottom of hole bears S71°20'58"E 334.58' from the Surface Position.
- 4. NAD 83 Latitude & Longitude are (CORS 96)(EPOCH:2002).
- 5. Bearings and Distances are based upon a Local Cartesian Grid, oriented to Geodetic North at the North 1/4 Corner of Section 8, T10S, R22E, S.L.B.&M. The Grid having a mean project height of 5300'. Lineal units used are U.S. Survey Foot.
- 6. Basis of elevation is Tri-Sta "Two Water" located in Lot 4 of Section 1, T10S, R21E, S.L.B.&M. The elevation of this Tri-Sta is shown on the Big Pack Mtn NE 7.5 Min. Quadrangle as being 5238'.

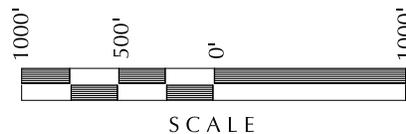

SURVEYOR'S CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

John R. Laughlin
 PROFESSIONAL LAND SURVEYOR
 REGISTRATION NO. 6028691
 STATE OF UTAH
 5-21-2013

Kerr-McGee Oil & Gas Onshore, LP
 1099 18th Street - Denver, Colorado 80202



CONSULTING, LLC
 2155 North Main Street
 Sheridan, WY 82801
 Phone 307-674-0609
 Fax 307-674-0182

TIMBERLINE (435) 789-1365
 ENGINEERING & LAND SURVEYING, INC.
 209 NORTH 300 WEST - VERNAL, UTAH 84078

DATE SURVEYED: 4-8-13	SURVEYED BY: W.W.	SHEET NO: 6
DATE DRAWN: 4-19-13	DRAWN BY: T.J.R.	
SCALE: 1" = 1000'		6 OF 27

WELL PAD - NBU 922-35F

**NBU 922-35F4BS
 WELL PLAT**

**2079' FNL, 2150' FWL (Bottom Hole)
 SE 1/4 NW 1/4 OF SECTION 35, T9S, R22E,
 S.L.B.&M., UTAH COUNTY, UTAH.**