



ConocoPhillips Company
6825 South 5300 West
P.O. Box 851
Price, UT 84501

January 13, 2006

Ms. Diana Whitney
State of Utah
Division of Oil, Gas and Mining
1594 West North Temple, Suite 1210
SLC, Utah 84114-5801

RE: Application for Permit to Drill: Utah 26-1055, Utah 13-1167, Utah 35-1080, Utah 34-1217, Utah 7-1229, Utah 6-1228, Utah 7-1230, Ritzakis 8-1017

Dear Ms. Whitney:

Please find enclosed an *Application for Permit to Drill* (APD) for the following wells:

Utah 26-1055, Utah 13-1167, Utah 35-1080, Utah 34-1217, Utah 7-1229, Utah 6-1228, Utah 7-1230, Ritzakis 8-1017

Please accept this letter as ConocoPhillips' written request for confidential treatment of all information contained in and pertaining to this permit application, if said information is eligible for such consideration.

Thank you very much for your timely consideration of this application. Please feel free to contact me if you have any questions.

Sincerely,

Jean Semborski
Construction/Asset Integrity Supervisor

cc: Mr. Eric Jones, BLM, Moab, Utah
Mr. John Albert, Chevron
Mr. John Lennon, Dominion Resources
Mr. Don Stephens, BLM, Price, Utah
Ms. Debbie Marberry, ConocoPhillips
Mr. Kile Thompson, ConocoPhillips
Mr. Mark Jones, DOGM, Price, Utah
Mr. Ed Bonner, SITLA
ConocoPhillips Well File

RECEIVED

JAN 12 2006

DIVISION OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT
(highlight changes)

APPLICATION FOR PERMIT TO DRILL		5. MINERAL LEASE NO: ML-39865	6. SURFACE: State
1A. TYPE OF WORK: DRILL <input checked="" type="checkbox"/> REENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/>		7. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A	
B. TYPE OF WELL: OIL <input type="checkbox"/> GAS <input checked="" type="checkbox"/> OTHER _____ SINGLE ZONE <input checked="" type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>		8. UNIT or CA AGREEMENT NAME: Drunkards Wash UTU-67921X	
2. NAME OF OPERATOR: ConocoPhillips Company		9. WELL NAME and NUMBER: Utah 13-1167	
3. ADDRESS OF OPERATOR: P.O. Box 851 CITY Price STATE UT ZIP 84501		PHONE NUMBER: (435) 613-9777	10. FIELD AND POOL, OR WILDCAT: Drunkards Wash
4. LOCATION OF WELL (FOOTAGES) AT SURFACE: 2537' FNL, 269' FEL AT PROPOSED PRODUCING ZONE: Same as Surface		11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SENE 13 15S 9E	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 5.5 miles southeast of Price, Utah		12. COUNTY: Carbon	13. STATE: UTAH
15. DISTANCE TO NEAREST PROPERTY OR LEASE LINE (FEET) 269 feet	16. NUMBER OF ACRES IN LEASE: 1439.6 acres	17. NUMBER OF ACRES ASSIGNED TO THIS WELL: 160 acres	
18. DISTANCE TO NEAREST WELL (DRILLING, COMPLETED, OR APPLIED FOR) ON THIS LEASE (FEET) 1400 feet	19. PROPOSED DEPTH: 2,357	20. BOND DESCRIPTION: Rotary	
21. ELEVATIONS (SHOW WHETHER DF, RT, GR, ETC.): 5707.5' GR	22. APPROXIMATE DATE WORK WILL START: 2/1/2006	23. ESTIMATED DURATION:	

24. **PROPOSED CASING AND CEMENTING PROGRAM**

SIZE OF HOLE	CASING SIZE, GRADE, AND WEIGHT PER FOOT			SETTING DEPTH	CEMENT TYPE, QUANTITY, YIELD, AND SLURRY WEIGHT		
15"	12 3/4"	H 40	40.5#/ft	40			
11"	8 5/8"	J-55	24#/ft	400	170 sks G+2% CaCl	1.18 cu.ft./sk	15.6 ppg
7 7/8"	5 1/2"	N-80	17#/ft	2,347	110sks Std Cement +	10% CalSeal	1.61 cu.ft./sk 14.2 ppg
					170sks 50/50 POZ +8	% Bent+10% CalSeal	1/4 #/sk 12.5ppg

25. **ATTACHMENTS**

VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES:

- | | |
|--|--|
| <input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER | <input type="checkbox"/> COMPLETE DRILLING PLAN |
| <input checked="" type="checkbox"/> EVIDENCE OF DIVISION OF WATER RIGHTS APPROVAL FOR USE OF WATER | <input type="checkbox"/> FORM 5, IF OPERATOR IS PERSON OR COMPANY OTHER THAN THE LEASE OWNER |

CONFIDENTIAL

NAME (PLEASE PRINT) Jean Semborski TITLE Construction/Asset Integrity Supervisor
SIGNATURE *Jean Semborski* DATE 1/11/2006

(This space for State use only)

API NUMBER ASSIGNED: 43-007-31114

Approved by the
Utah Division of
Oil, Gas and Mining
APPROVAL: *[Signature]*
Date: 03-02-06

RECEIVED
JAN 12 2006

DIV. OF OIL, GAS & MINING


Range 9 East

(EAST - 5215.32')

S89°30'54"E - 5228.84'

Township 15 South

(NORTH - 5280.00')
N00°13'09"E - 5325.40'

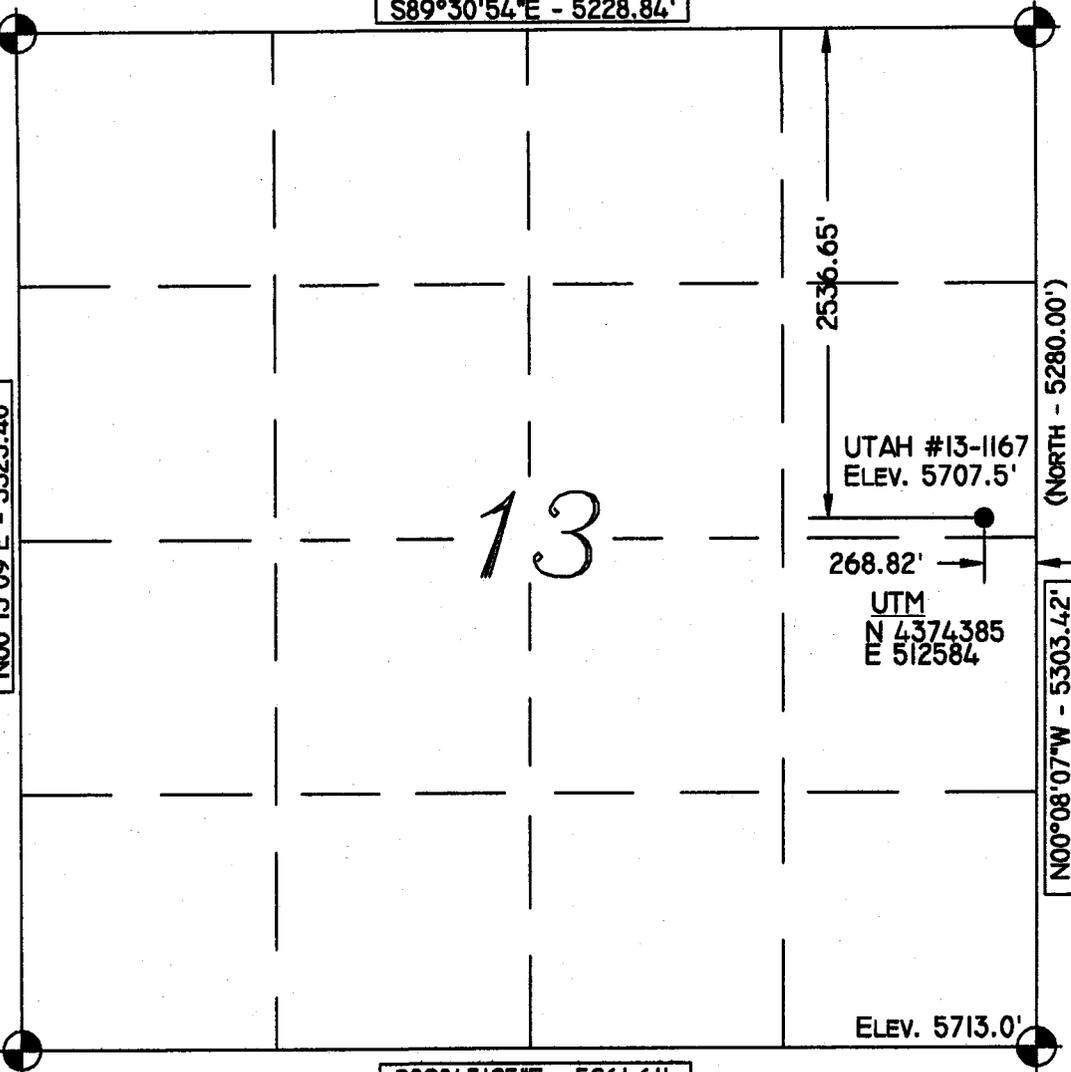

2536.65'

UTAH #13-1167
ELEV. 5707.5'

268.82'

UTM
N 4374385
E 512584

(NORTH - 5280.00')

N00°08'07"W - 5303.42'

ELEV. 5713.0'

S89°45'25"E - 5261.61'

(EAST - 5227.20')

Location:

The well location was determined using a Trimble 5700 GPS survey grade unit.

Basis of Bearing:

The Basis of Bearing is GPS Measured.

GLO Bearing:

The Bearings indicated are per the recorded plat obtained from the U.S. Land Office.

Basis of Elevation:

Basis of Elevation of 5713' being at the Southeast Section Corner of Section 13, Township 15 South, Range 9 East, Salt Lake Base and Meridian, as shown on the Price Quadrangle 7.5 minute series map.

Description of Location:

Proposed Drill Hole located in the SE/4 NE/4 of Section 13, T15S, R9E, S.L.B.&M., being 2536.65' South and 268.82' West from the Northeast Section Corner of Section 13, T15S, R9E, Salt Lake Base & Meridian.

Surveyor's Certificate:

I, Albert J. Spensko, a Registered Professional Land Surveyor, holding Certificate 146652 State of Utah, do hereby certify that the information on this drawing is a true and accurate survey based on data of record and was conducted under my personal direction and supervision as shown hereon.



TALON RESOURCES, INC.

195 North 100 West P.O. Box 1230
Huntington, Utah 84526
Phone (435)687-5310 Fax (435)687-5311
E-Mail talon@trv.net

ConocoPhillips Company

WELL UTAH #13-1167
Section 13, T15S, R9E, S.L.B.&M.
Carbon County, Utah

Drawn By: N. BUTKOVICH	Checked By: L.W.J./A.J.S.
Drawing No. A-1	Date: 12/22/05
	Scale: 1" = 1000'
Sheet 1 of 4	Job No. 2127

Legend

- Drill Hole Location
- ⊙ Metal Cap (Found)
- Brass Cap (Searched for, but not found)
- △ Calculated Corner
- () GLO
- GPS Measured

NOTES:

1. UTM and Latitude / Longitude Coordinates are derived using a GPS Pathfinder and are shown in NAD 27 Datum.

LAT / LONG
39°31'15.235"N
110°51'12.955"W

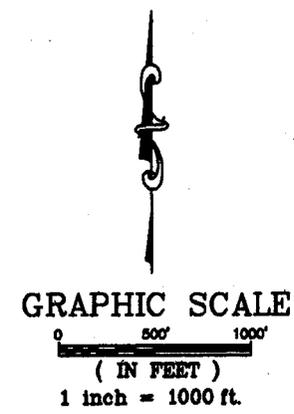


EXHIBIT "D"
DRILLING PROGRAM

Attached to Form 3
ConocoPhillips Company
Utah 13-1167
SE/4, NE/4, Sec.13, T15S, R9E, SLB & M
2537' FNL, 269' FEL
Carbon County, Utah

1. The Surface Geologic Formation

Mancos Shale

2. Estimated Tops of Important Geologic Markers

Blue Gate/Ferron 1853'

3. Projected Gas & H2O zones (Ferron Formation)

Coals and sandstones 1889' - 1973'

No groundwater is expected to be encountered.

Casing & cementing will be done to protect potentially productive hydrocarbons, lost circulation zones, abnormal pressure zones, and prospectively valuable mineral deposits.

All indications of usable water will be reported.

Surface casing will be tested to 500 psi and Production casing tested to 1500 psi with a minimum of 1 psi/ft of the last casing string depth

4. The Proposed Casing and Cementing Programs

Hole Size	Casing Size	Wt/Ft	Grade	Joint	Depth set
14 3/4"	12 3/4"	40.5	H-40	ST&C	0-50'
11"	8 5/8"	24.0	J-55	ST&C	0-400'
7 7/8"	5 1/2"	17.0	N-80	LT&C	<u>0-2347</u>

Cementing Program

The 8 5/8" surface casing will be set with approximately 170 sacks Class G or Type V cement with 2% CaCl₂ mixed at 15.6 ppg (yield =1.18 ft³/sx). The cement will be circulated back to surface with 100% excess.

The 5 1/2" production casing will be set and cemented using a two stage cementing process . This entails setting casing to total TD and running a DV tool to approximately 300' of the top of the Ferron.

The 1st Stage of cement will then be pumped to approximately 50' from the DV tool. After cement is pumped, the cement cap will be removed and a wiper plug installed. The cement cap will then be screwed back on and a wiper plug will be displaced to TD. The cement cap will be removed and the DV tool bomb will be dropped followed by the 2nd Stage wiper plug. (This is done to open the DV tool and establish circulation.) Once circulation is established, circulation will continue at approximately 1 bpm for 4 hours while waiting on cement (WOC). WOC at a minimum of 4 hours before beginning 2nd stage cement job. After the 2nd Stage has been pumped, a top wiper plug will be dropped and displaced with water (or water spacer and mud). Shut in well and WOC.

The 5 1/2" production casing will be set with approximately 110 sacks of Standard Cement, 10% Cal Seal 60 (accelerator), 1% Calcium Chloride (accelerator), 1/4 lbm/sk Flocele (lost circulation additive) with a yield of 1.61 ft³/sx at 14.2 ppg; calculated with an excess of 35% for the 1st Stage. For the 2nd stage, approximately 170 sx of 50/50 POZ Premium cement, 8% Bentonite (light weight additive), 10% Cal Seal 60 (accelerator), 1/4 lbm/sk Flocele (lost circulation additive) with a yield of 1.98 ft³/sx at 12.5 ppg; calculated with an excess of 30% for the 2nd Stage.

The above cement volumes are approximate and are calculated under the assumption that a gauge hole will be achieved. If the cement does not return to surface, a cement bond log will be run to determine the top of cement. In the case where the cement is below the surface casing shoe, the casing will be perforated and squeeze cemented to the surface. If the cement is above the surface casing shoe, cement will be one-inched to the surface.

The following shall be entered in the driller's log:

- 1) Blowout preventer pressure tests, including test pressures and results;
- 2) Blowout preventer tests for proper functioning;
- 3) Blowout prevention drills conducted;
- 4) Casing run, including size, grade, weight, and depth set;
- 5) How the pipe was cemented, including amount of cement, type, whether cement circulated, location of the cementing tools, etc.;
- 6) Waiting on cement time for each casing string;
- 7) Casing pressure tests after cementing, including test pressures and results.

5. The Operator's Minimum Specifications for Pressure Control

Exhibit "G" is a schematic diagram of the blowout preventer equipment. A double gate 3000 psi BOPE will be used with a rotating head. This equipment will be tested to 2000 psi. All tests will be recorded in a Driller's Report Book. Physical operation of BOP's will be checked on each trip.

6. The Type and Characteristics of the Proposed Circulating Muds

0-400	11" hole	Drill with air, will mud-up if necessary.
400-TD	7 7/8" hole	Drill with air, will mud-up if necessary. 400 psi @ 1400-1600 cfm

7. The Testing, Logging and Coring Programs are as followed

400-TD Gamma Ray, Neutron Porosity, CBL

Any Anticipated Abnormal Pressures or Temperatures

No abnormal pressures or temperatures have been noted or reported in wells drilled in the area nor at the depths anticipated in this well. Bottom hole pressure expected is about 1039 psi max., however due to offset production pressures may be much lower. No hydrogen sulfide or other hazardous gases or fluids have been found, reported or are known to exist at these depths in the area.

8. Anticipated Starting Date and Duration of the Operations.

The well will be drilled around February 1, 2006

Verbal and/or written notifications listed below shall be submitted in accordance with instructions from the Division of Oil, Gas & Mining:

- (a) prior to beginning construction;
- (b) prior to spudding;
- (c) prior to running any casing or BOP tests;
- (d) prior to plugging the well, for verbal plugging instructions.

Spills, blowouts, fires, leaks, accidents or other unusual occurrences shall be reported to the Division of Oil, Gas & Mining immediately.

SURFACE USE PLAN

Attached to Form 3
ConocoPhillips Company
Utah 13-1167
SE/4, NE/4, Sec.13, T15S, R9E, SLB & M
2537' FNL, 269' FEL
Carbon County, Utah

1. Existing Roads

- a. We do not plan to change, alter or improve upon any existing state or county roads.
- b. Existing roads will be maintained in the same or better condition. See Exhibit "B".

2. Planned Access

Approximately 800' of new access is required (Refer to Drawing L-1)

- a. Maximum Width: 24' travel surface with 27' base
- b. Maximum grade: 7%
- c. Turnouts: None
- d. Drainage design: 1 culvert may be required. Water will be diverted around well pad as necessary.
- e. If the well is productive, the road will be surfaced and maintained as necessary to prevent soil erosion and accommodate year-round traffic.
- f. Pipe and power lines will follow the proposed access road.

3. Location of Existing Wells

- a. Refer to Drawing L-1.

4. Location of Existing and/or Proposed Facilities

- a. If the well is a producer, installation of production facilities will be as shown on Exhibit "H". Buried powerlines run along access on the east and north, gathering lines on the south or west.
- b. Rehabilitation of all pad areas not used for production facilities will be made in accordance with landowner stipulations.

5. Location and Type of Water Supply

- a. Water to be used for drilling will be purchased from the Price River Water Improvement District (a local source of municipal water) (tel. 435-637-6350).
- b. Water will be transported by truck over approved access roads.
- c. No water well is to be drilled for this location.

6. Source of Construction Materials

- a. Any necessary construction materials needed will be obtained locally and hauled to the location on existing roads.
- b. No construction or surfacing materials will be taken from Federal/Indian land.

7. Methods for handling waste disposal

- a. As the well will be air drilled, a small reserve pit will be constructed with a minimum of one-half the total depth below the original ground surface on the lowest point within the pit. The pit will not be lined unless conditions encountered during construction warrant it or if deemed necessary by the DOGM representative during the pre-site inspection. Three sides of the reserve pit will be fenced within 24 hours after completion of construction and the fourth side within 24 hours after drilling operation cease with woven wire topped with barbed wire to a height of not less than four feet. The fence will be kept in good repair while the pit is drying.
- b. Following drilling, the liquid waste will be evaporated from the pit and the pit back-filled and returned to natural grade. No liquid hydrocarbons will be discharged to the reserve pit or location.
- c. In the event fluids are produced, any oil will be retained in tankage until sold and any water produced will be retained until its quality can be determined. The quality and quantity of the water will determine the method of disposal.
- d. Trash will be contained in a portable metal container and will be hauled from location periodically and disposed of at an approved disposal site. Chemical toilets will be placed on location and sewage will be disposed of at an appropriate disposal site.

8. Ancillary Facilities

- a. We anticipate no need for ancillary facilities with the exception of one trailer to be located on the drill site.

9. Wellsite Layout

- a. Available topsoil will be removed from the location and stockpiled. Location of mud tanks, reserve and berm pits, and soil stockpiles will be located as shown on the attachments.
- b. A blooie pit will be located 100' from the drill hole. A line will be placed on the surface from the center hole to the pit. The pit will not be lined, but will be fenced on four sides to protect livestock/wildlife.
- c. Access to the well pad will be as shown on Drawing A-2 and L-1.
- d. Natural runoff will be diverted around the well pad.

10. Plans for Restoration of Surface

- a. All surface areas not required for producing operations will be graded to as near original condition as possible and contoured to maintain possible erosion to a minimum.
- b. Available topsoil will be stockpiled and will be evenly distributed over the disturbed areas and the area will be reseeded as prescribed by the landowner.
- c. Pits and any other area that would present a hazard to wildlife or livestock will be fenced off when the rig is released and removed.

11. Surface Ownership:

- a. The wellsite and access road will be constructed on lands owned by the School and Institutional Trust Lands Administration. The operator shall contact the landowner representative and the Division of Oil, Gas and mining 48 hours prior to beginning construction activities.

12. **Other Information:**

- a. The primary surface use is farming and grazing. The nearest dwelling is approximately 3 miles east.
- b. Nearest live water is the Miller Creek located 3000' south.
- c. If there is snow on the ground when construction begins, it will be removed before the soil is disturbed and piled downhill from the topsoil stockpile location.
- d. The backslope and foreslope will be constructed no steeper than 4:1.
- e. All equipment and vehicles will be confined to the access road and well pad.
- f. A complete copy of the approved Application for Permit to Drill (APD) including conditions and stipulations, shall be on the wellsite during construction and drilling operations.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the Division of Oil, Gas & Mining.

13. Company Representative

Jean Semborski
Construction/Asset Integrity Supervisor
ConocoPhillips Company
P.O. Box 851
6825 South 5300 West
Price, Utah 84501
(435) 613-9777
(435) 820-9807

Mail Approved A.P.D. To:

Company Representative

Excavation Contractor

Larry Jensen, Vice President
Nelco Contractors Inc.
Vice President
(435) 637-3495
(435) 636-5268



14. Certification

I hereby certify that I, or persons under my direct supervision have inspected the proposed drill site and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct, and that the work associated with the operations proposed herein will be performed by ConocoPhillips Company and its subcontractors in conformity with this plan and the terms and conditions under which it is approved.

1/11/06
Date

Jean Semborski
Jean Semborski
Construction/Asset Integrity Supervisor
ConocoPhillips Company

ELEVATION OF UNGRADED GROUND AT LOCATION STAKE = 5707.5'
 ELEVATION OF GRADED GROUND AT LOCATION STAKE = 5707.0'

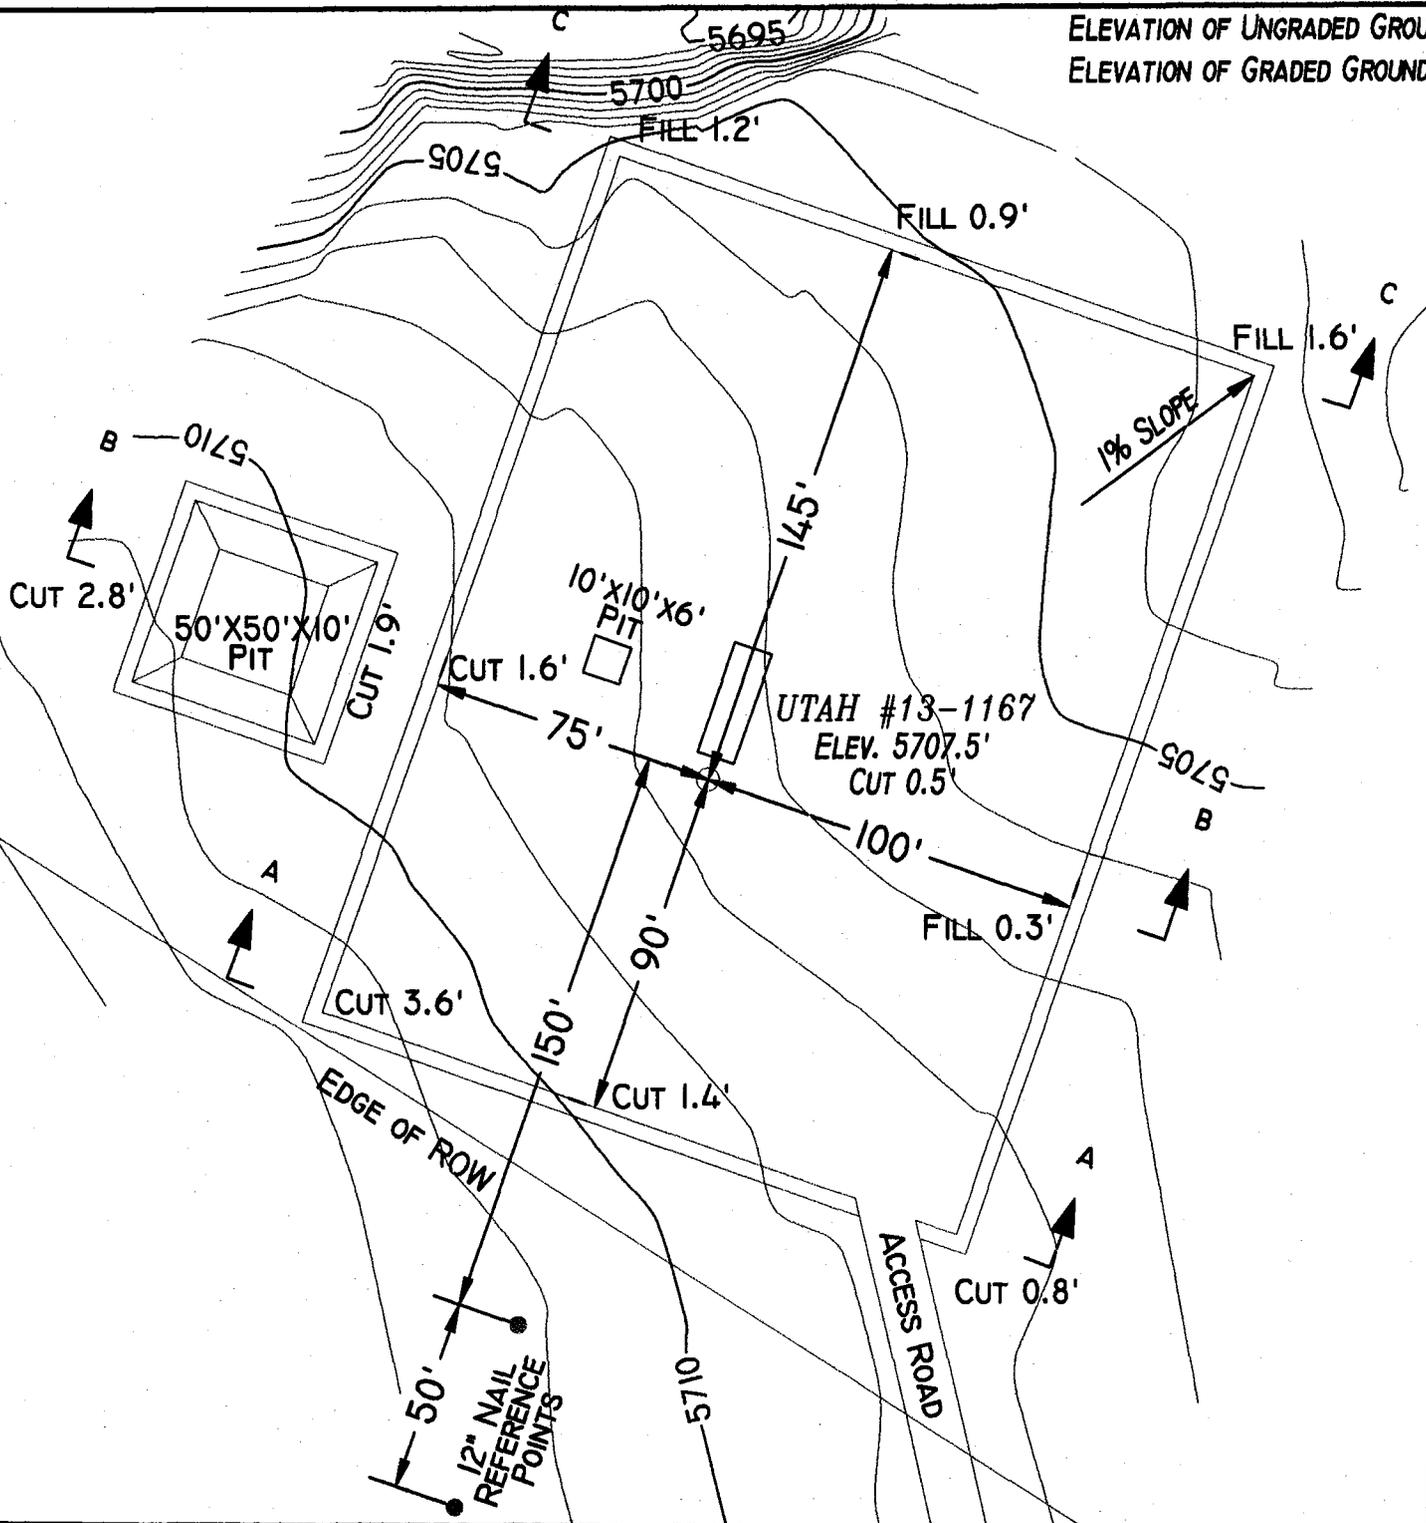

TALON RESOURCES, INC.

195 North 100 West P.O. Box 1230

Hemington, Utah 84528

Phone (435)687-5310 Fax (435)687-5311

E-Mail taloncorp.net



ConocoPhillips Company

LOCATION LAYOUT


Section 13, T15S, R9E, S.L.B.&M.

WELL UTAH #13-1167

DRAWN BY: N. BUTKOVICH	CHECKED BY: L.W.J.
DRAWING No. A-2	DATE: 12/22/05
SCALE: 1" = 50'	
SHEET 2 OF 4	
JOB No. 2127	

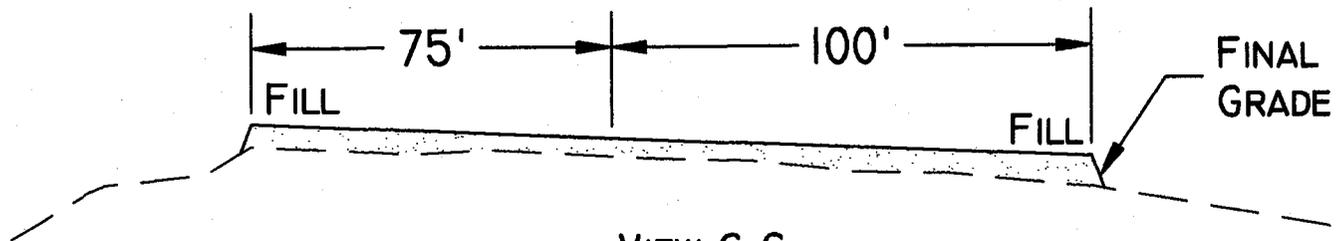


VIEW C-C

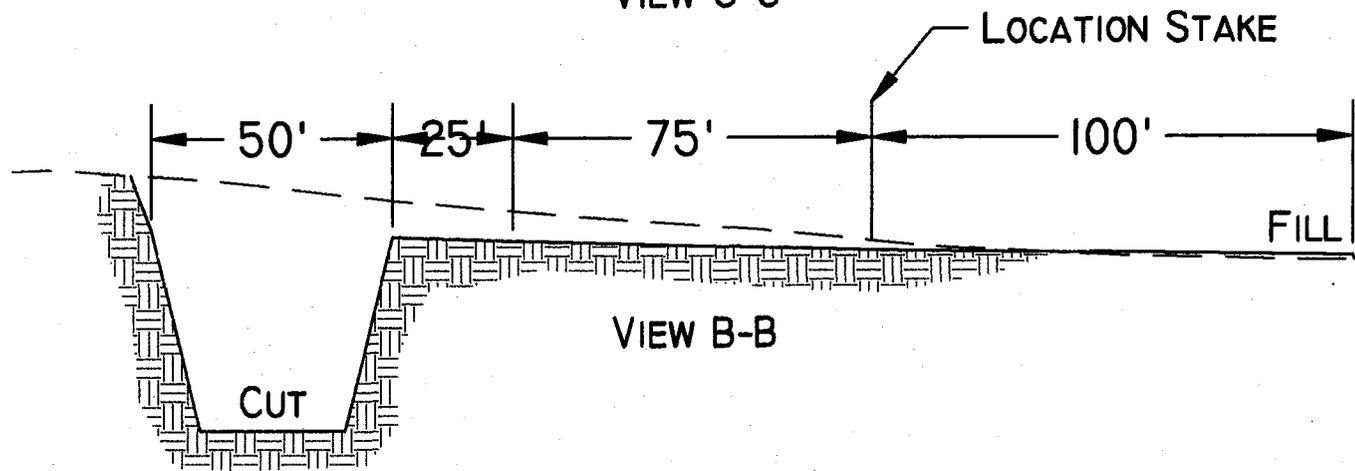

PRECONSTRUCTION GRADE

VIEW B-B

SLOPE = 1 1/2 : 1
(EXCEPT PIT)
PIT SLOPE = 1 : 1

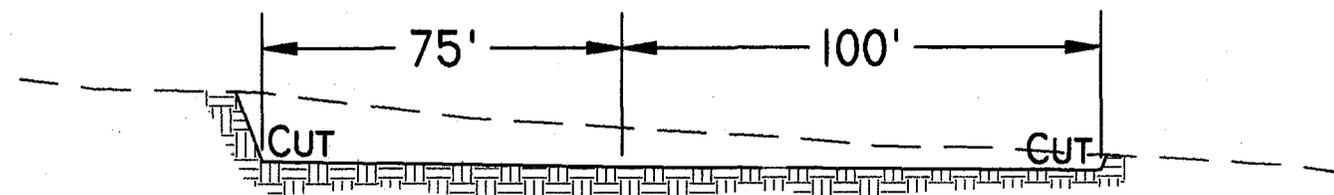

VIEW A-A



TALON RESOURCES, INC.

195 North 100 West P.O. Box 1230
Huntington, Utah 84528
Phone (435)687-5310 Fax (435)687-5311
E-Mail talonrc@tvm.net


ConocoPhillips Company

TYPICAL CROSS SECTION
Section 13, T15S, R9E, S.L.B.&M.
WELL UTAH #13-1167

DRAWN BY: N. BUTKOVICH	CHECKED BY: L.W.J.
DRAWING No. C-1	DATE: 12/22/05
	SCALE: 1" = 40'
SHEET 3 OF 4	JOB No. 2127

APPROXIMATE YARDAGES

CUT
(6") TOPSOIL STRIPPING = 810 CU. YDS.
REMAINING LOCATION = 1,700 CU. YDS.
(INCLUDING TOPSOIL STRIPPING)
TOTAL CUT (INCLUDING PIT) = 2,450 CU. YDS.
TOTAL FILL = 585 CU. YDS.

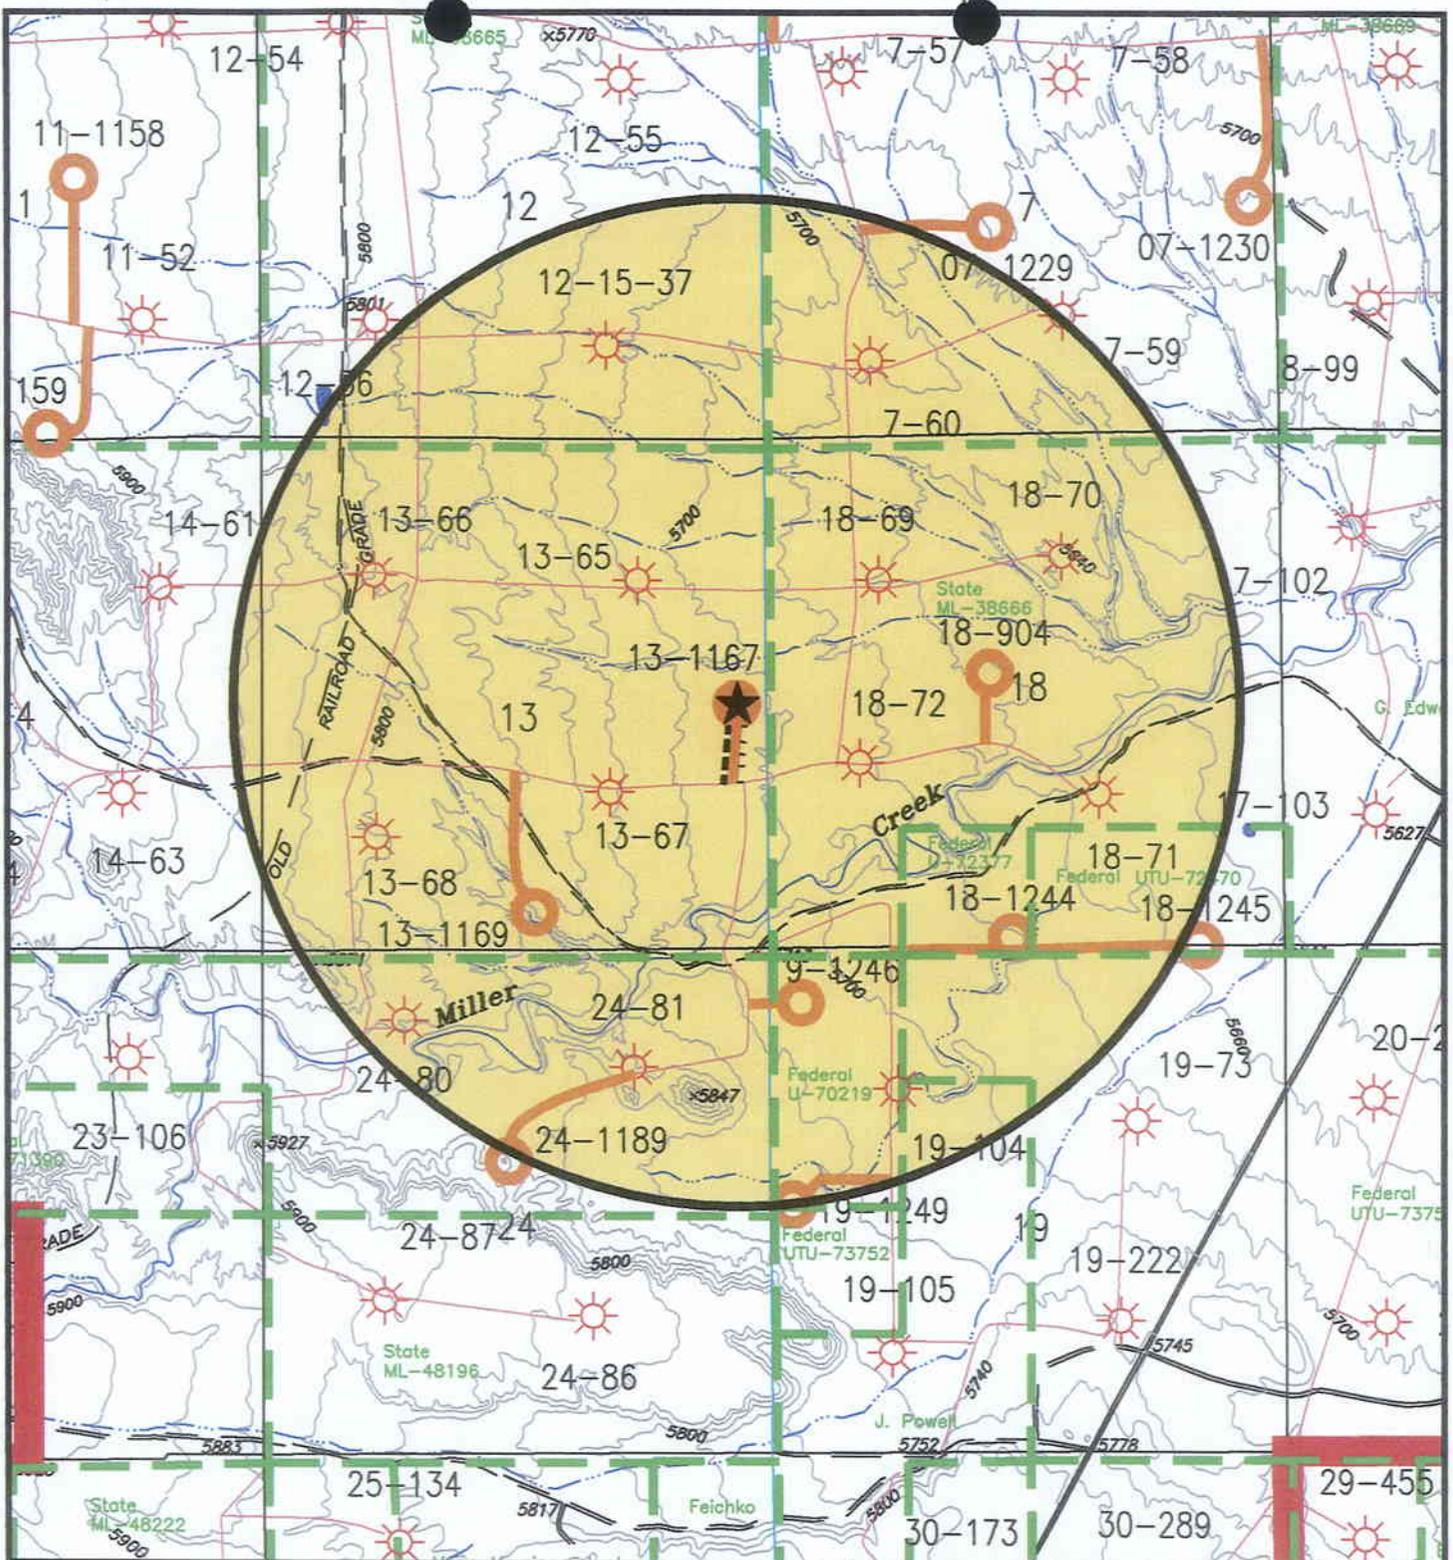

LEGEND

- Proposed Well Location:
- Other Proposed Well Locations:
- Proposed Powerline:
- Proposed Pipeline:
- Proposed Roads:
- Lease Boundary:
- Existing Wells:



Scale: 1" = 2000'

December 22, 2005


ConocoPhillips Company

6825 South 5300 West
 P.O. Box 851
 Price, Utah 84501
 Phone: (435) 613-9777
 Fax: (435) 613-9782




WELL UTAH #13-1167
Section 13, T15S, R9E, S.L.B.&M.
Drawing L-1 4 of 4

504000mE. 506000mE. 508000mE. 510000mE. 512000mE. 514000mE. 516000mE. NAD27 Zone 12S 521000mE.

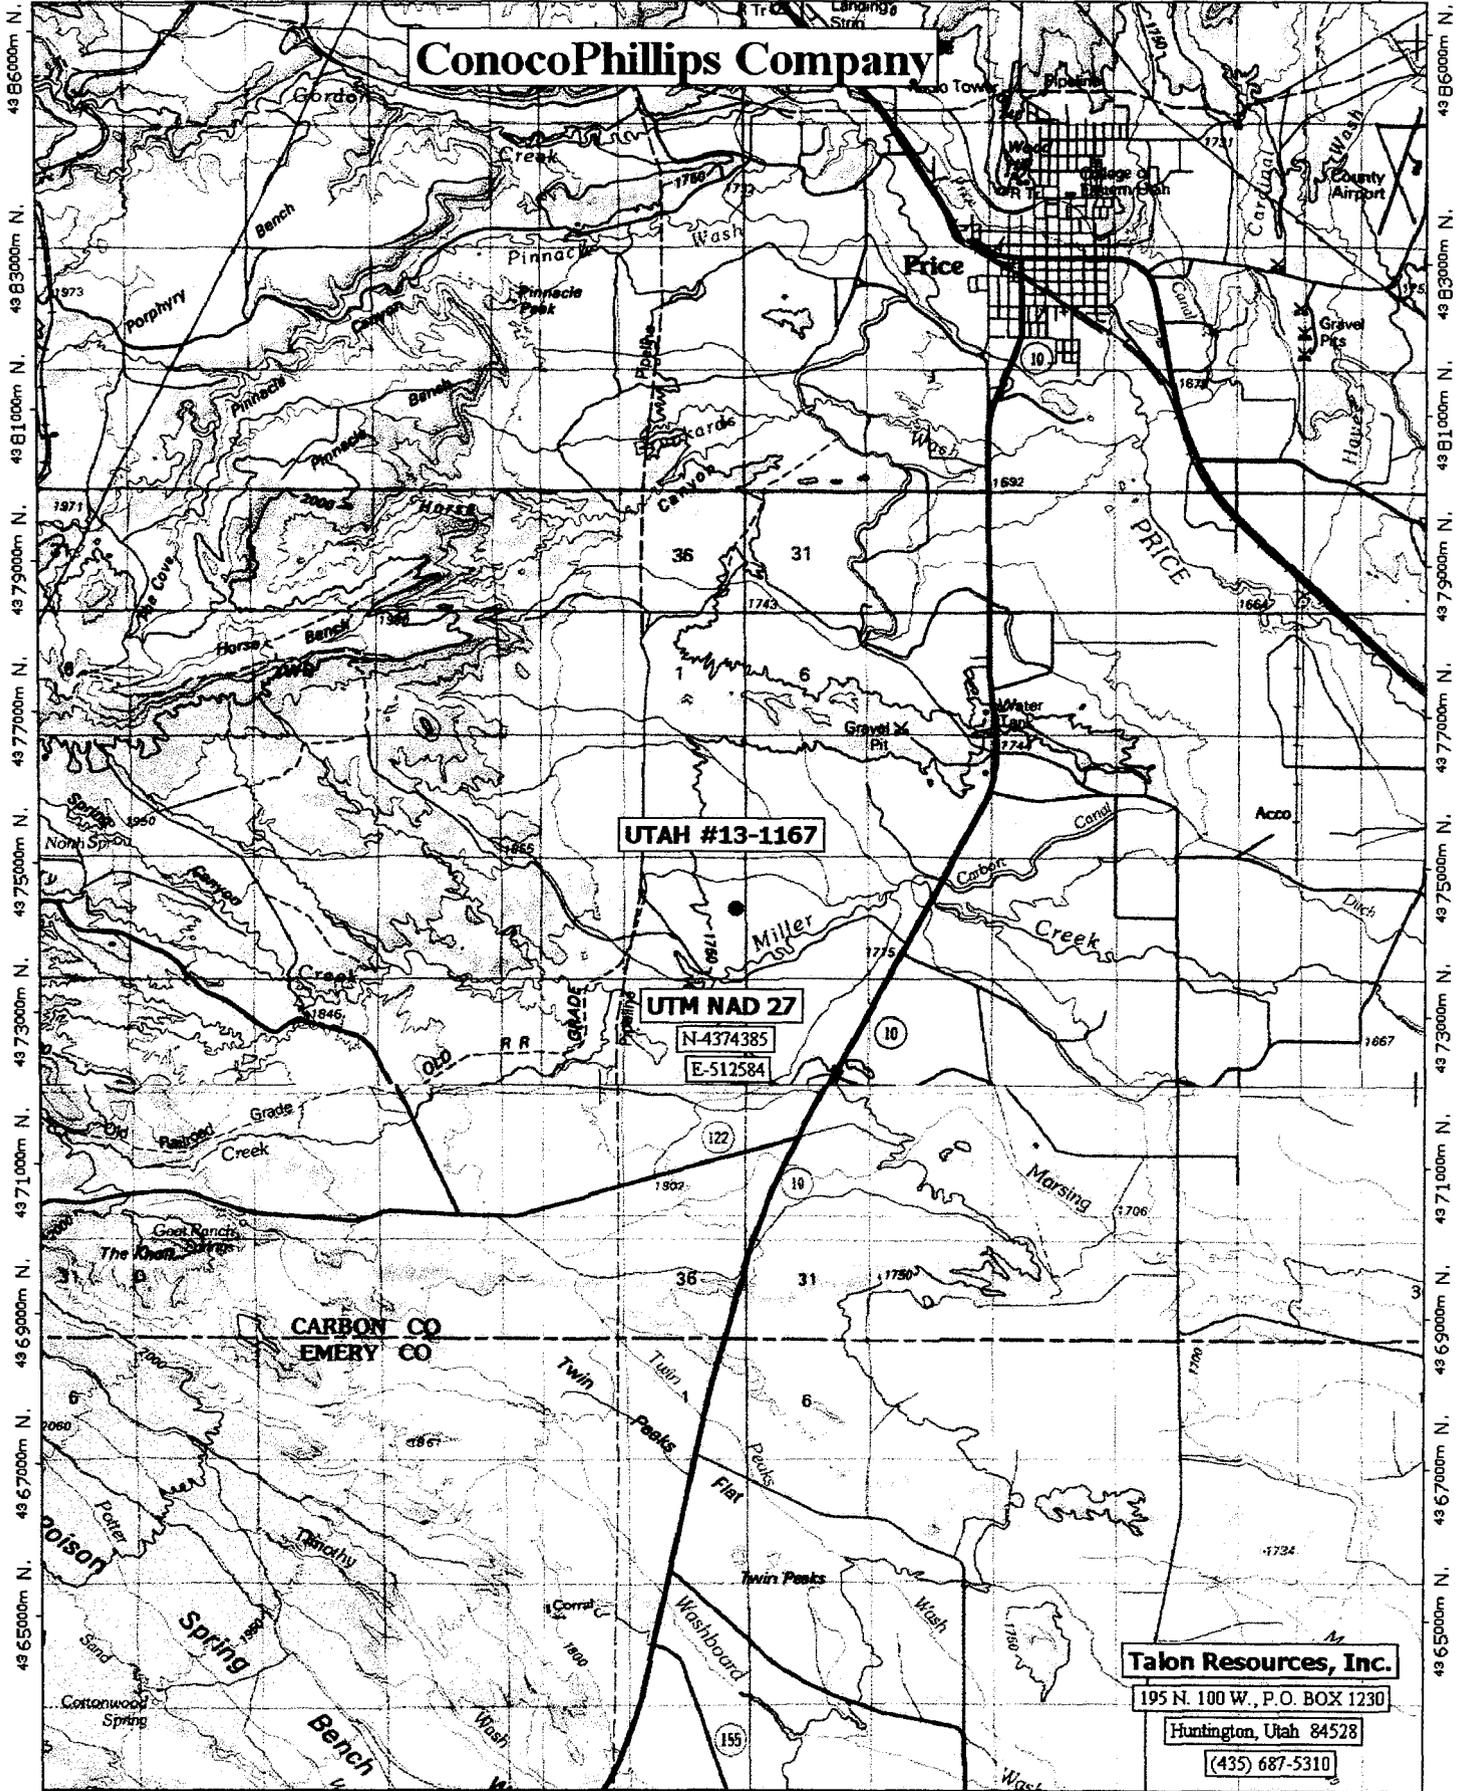


TN MN 12 1/2°




Map created with TOPO!® ©2003 National Geographic (www.nationalgeographic.com/topo)

APPROXIMATE LAYOUT OF RIG & EQUIPMENT

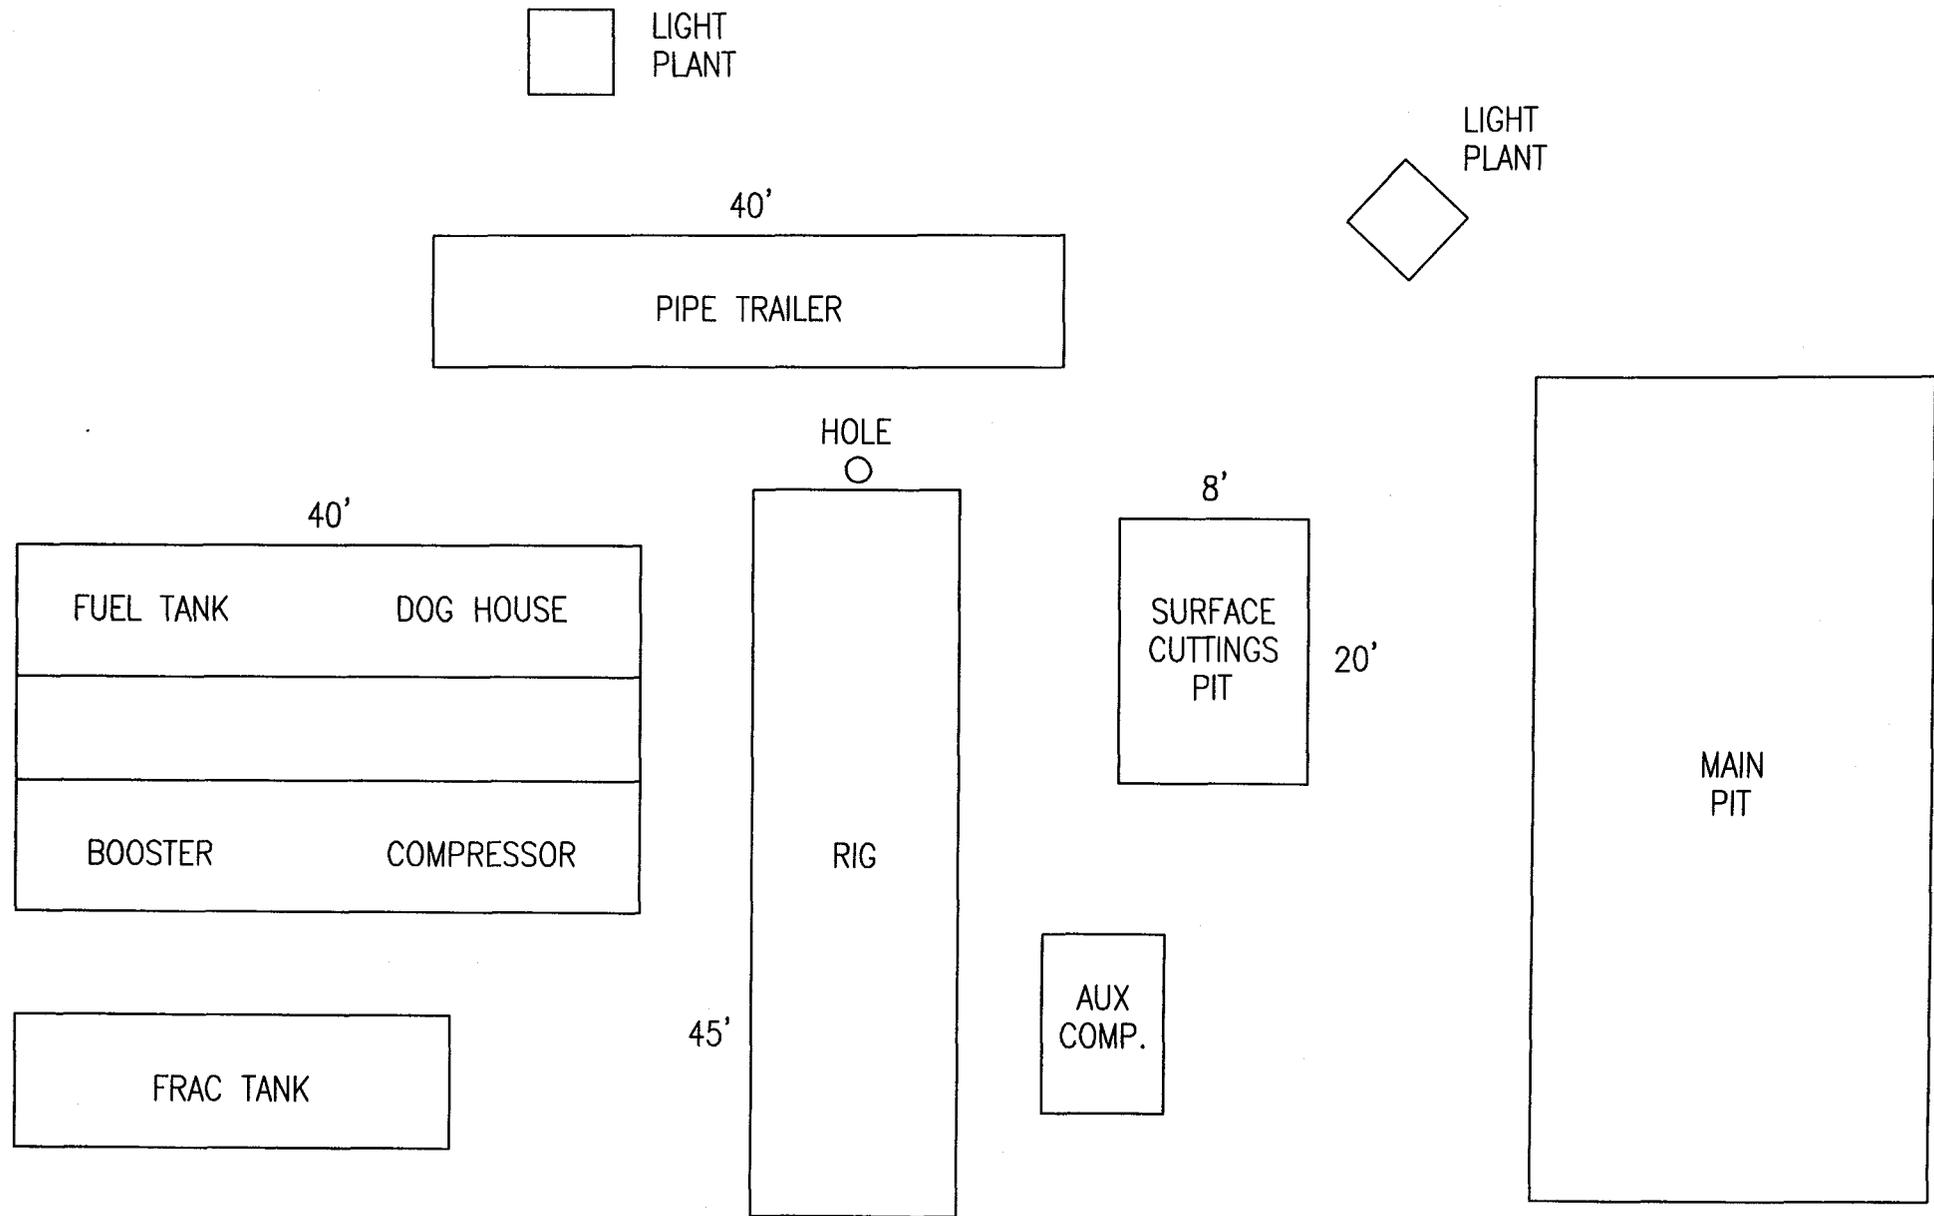


CONOCOPHILLIPS COMPANY


WELL SITE LAYOUT (235' x 175')

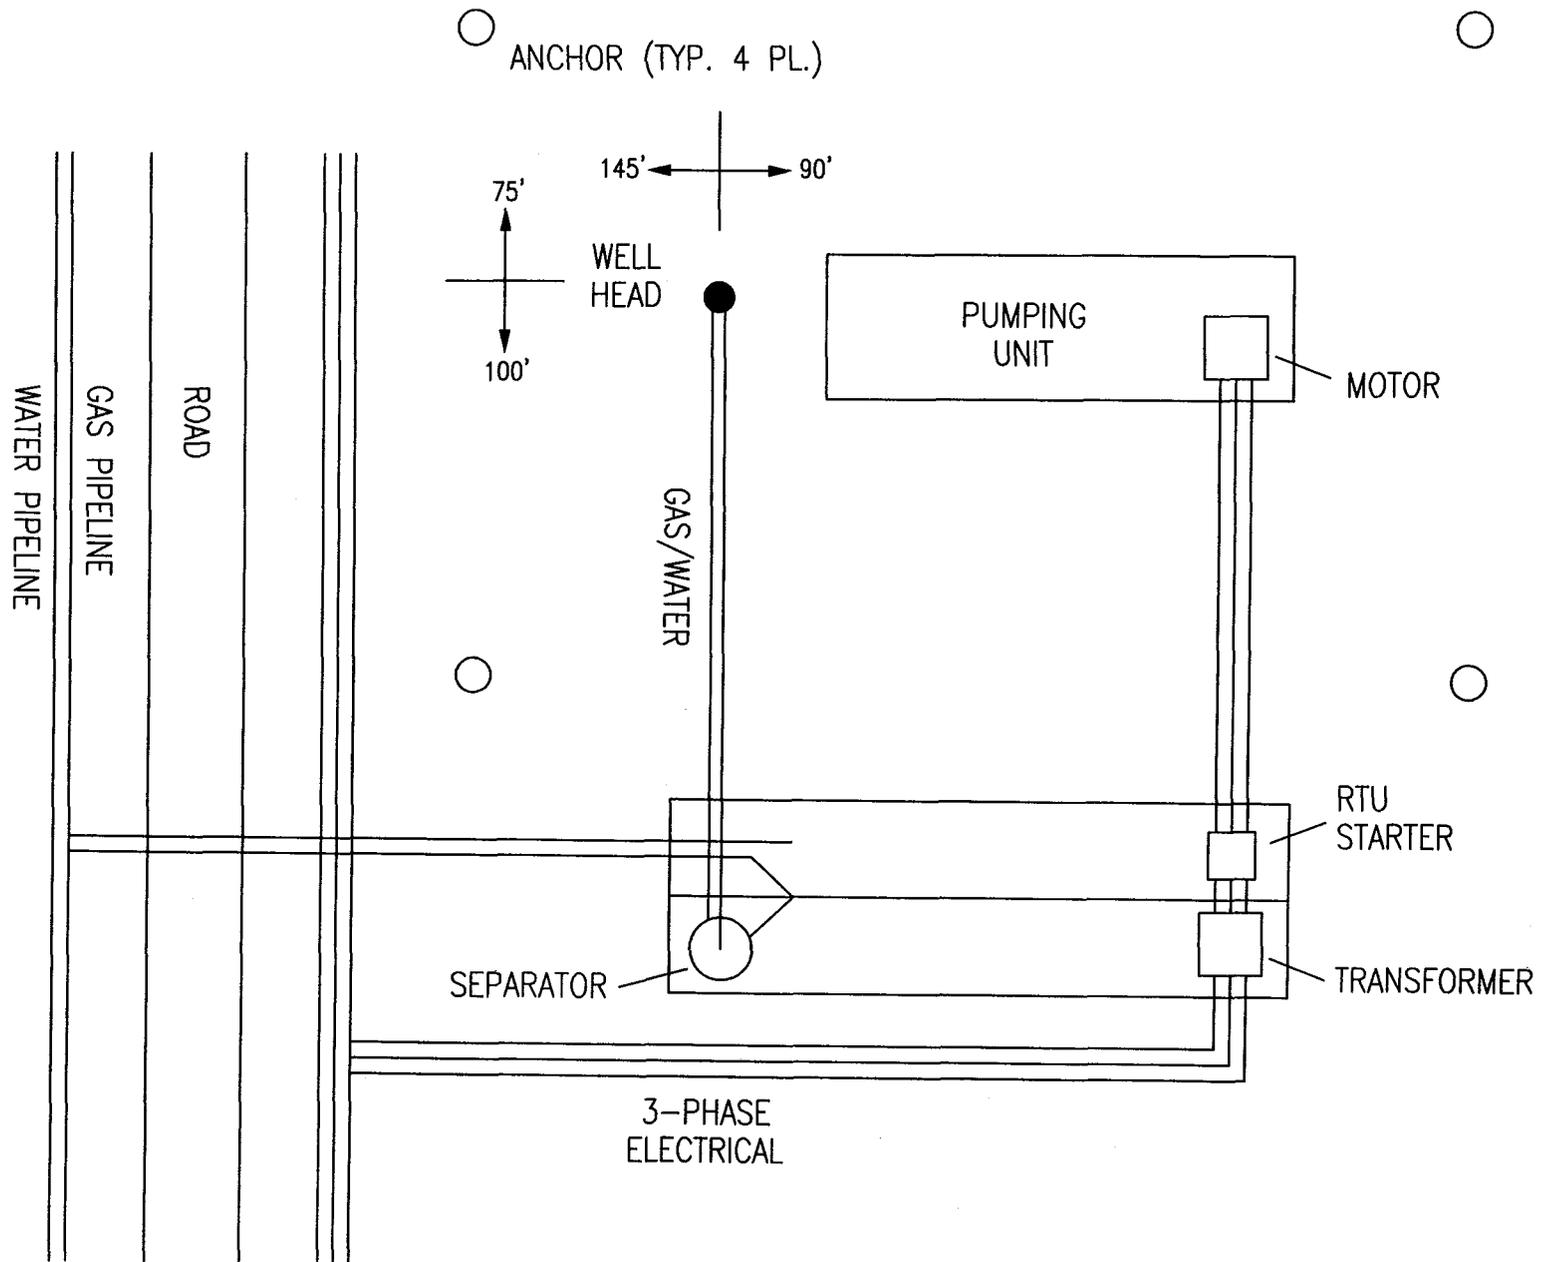

TYPICAL ROAD CROSS-SECTION
CONOCOPHILLIPS COMPANY

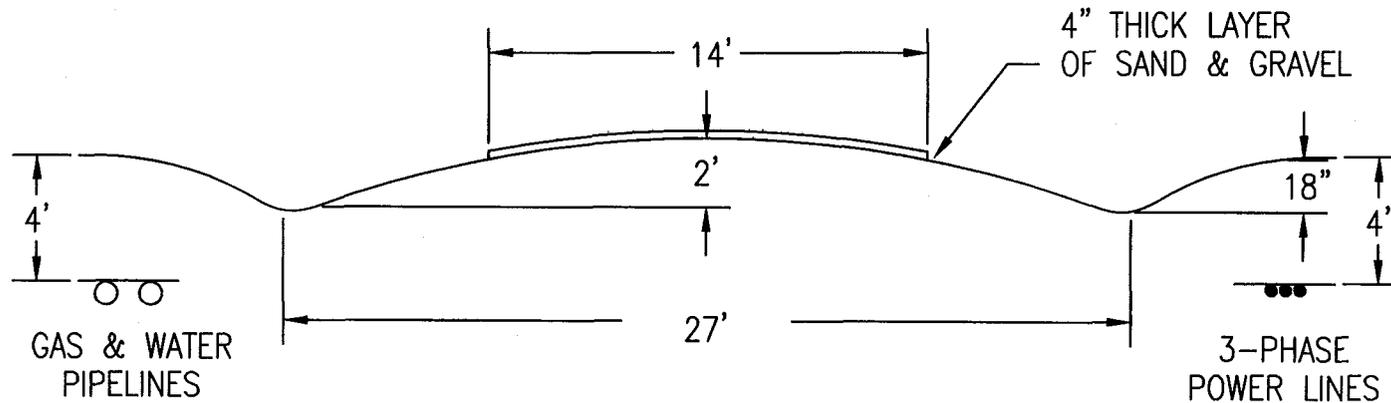


DIVERTER HEAD
CONOCOPHILLIPS COMPANY

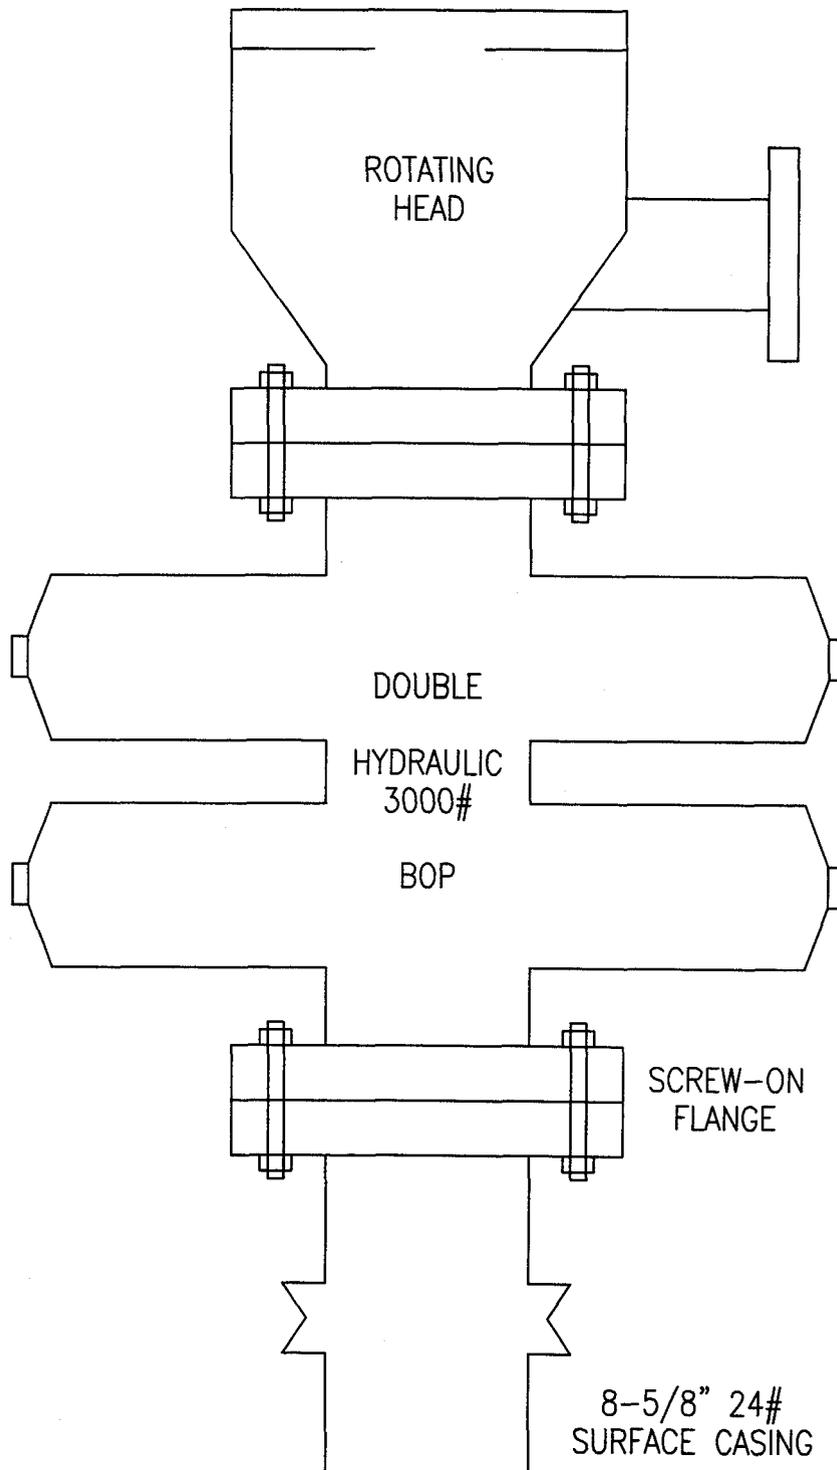

CONOCOPHILLIPS COMPANY

- (1) 2" 5M FLANGED CHOKE
- (2) 2" 5M GATE VALVE (FLANGED)
- (3) 2" 5M STUDDED CROSS
- (4) 2" 5M GATE VALVE (FLANGED)
- (5) 2" 5M FLANGED CHOKE
- (6) 2" 5M GATE VALVE (FLANGED)
- (7) 2" LINE
- (8) 2" 5M GATE VALVE (FLANGED)
- (9) 3000# GAUGE

NOTE:
NUMBER 8 GATE VALVE SITS ON TOP OF MANIFOLD BETWEEN STUDDED CROSS AND 3000# GAUGE.

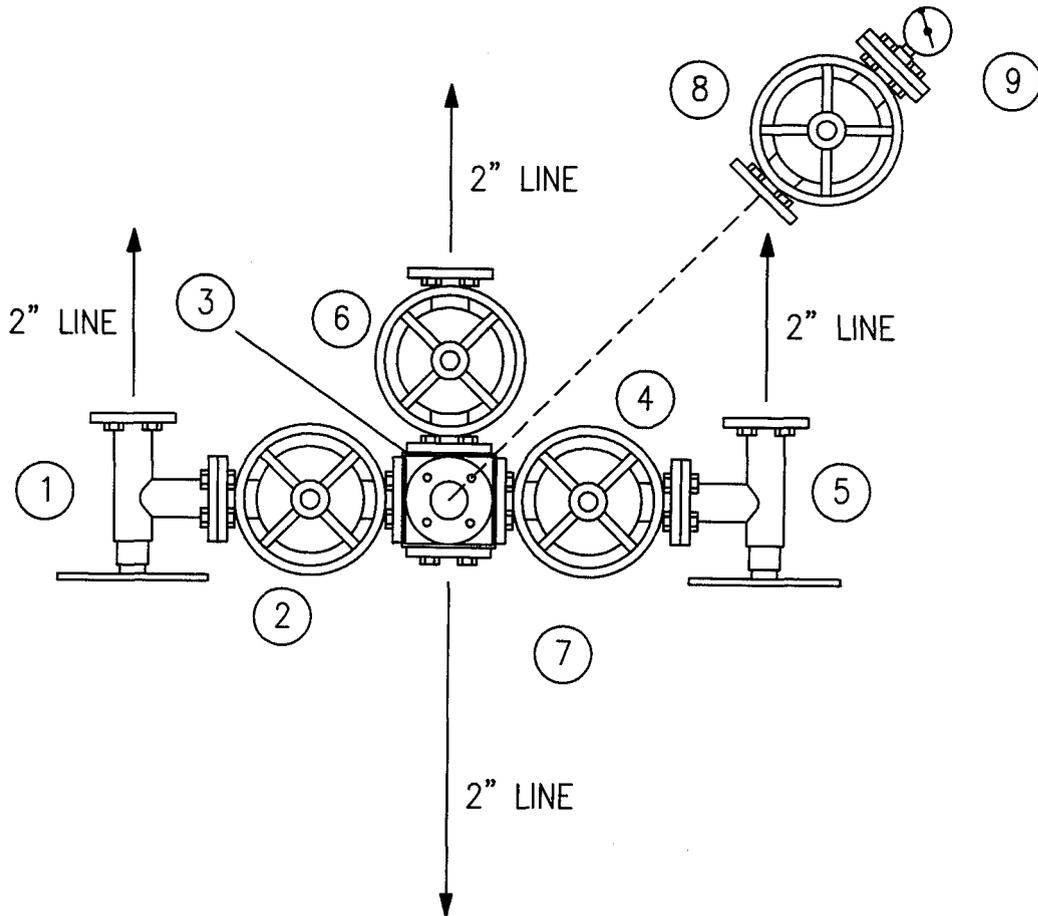

TO BOP
AND A NEW 2" BALL VALVE
FULL OPEN 5000 PSI

MANIFOLD

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 4A

Bond No. 6196922

SURETY BOND

KNOW ALL MEN BY THESE PRESENTS:

That we (operator name) CONOCOPHILLIPS COMPANY as Principal,
and

(surety name) SAFECO INSURANCE COMPANY OF AMERICA as Surety, duly authorized
and qualified to do business in the State of Utah, are held and firmly bound unto the State of Utah in the sum of:

EIGHTY THOUSAND AND NO/100***** dollars (\$ 80,000.00)
lawful money of the United States, payable to the Director of the Division of Oil, Gas and Mining, as agent of the State of Utah, for the use and
benefit of the State of Utah for the faithful payment of which we bind ourselves, our heirs, executors, administrators and successors, jointly and
severally by these presents.

THE CONDITION OF THIS OBLIGATION IS SUCH THAT, WHEREAS the Principal is or will be engaged in the drilling, redrilling, deepening,
repairing, operating, and plugging and abandonment of a well or wells and restoring the well site or sites in the State of Utah for the purposes of
oil or gas production and/or the injection and disposal of fluids in connection therewith for the following described land or well:

X Blanket Bond: To cover all wells drilled in the State of Utah

Individual Bond: Well No: _____
Section: _____ Township: _____ Range: _____
County: _____, Utah

NOW, THEREFORE, if the above bounden Principal shall comply with all the provisions of the laws of the State of Utah and the rules, orders and
requirements of the Board of Oil, Gas and Mining of the State of Utah, including, but not limited to the proper plugging and abandonment of wells
and well site restoration, then this obligation is void; otherwise, the same shall be and remain in full force and effect.

IN TESTIMONY WHEREOF, said Principal has hereunto subscribed its name and has caused this instrument to be signed by its duly authorized
officers and its corporate or notary seal to be affixed this

30th day of Dec, 20 02

(Corporate or Notary Seal here)

Attestee: [Signature] Date: 12-30-02

CONOCOPHILLIPS COMPANY
Principal (company name)
By James F. Hughes Title Corporate Insurance Manager
Name (print) Title
James F. Hughes
Signature

IN TESTIMONY WHEREOF, said Surety has caused this instrument to be signed by its duly authorized officers and its corporate or notary seal
to be affixed this

1ST day of JANUARY, 20 03

(Corporate or Notary Seal here)

Carolyn E. Wheeler
Date: 12/20/2002

SAFECO INSURANCE COMPANY OF AMERICA
Surety Company (Attach Power of Attorney)
By Tina Marie Foster Title Attorney-in-Fact
Name (print) Title
Tina Marie Foster
Signature
C/O MARSH USA, INC
Surety Mailing Address
P.O. BOX 36012, KNOXVILLE, TN 37936-6012
City State Zip

CAROLYN E. WHEELER
NOTARY PUBLIC
MY COMMISSION EXPIRES: NOVEMBER 1, 2006
(5/2002)

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 01/12/2006

API NO. ASSIGNED: 43-007-31116

WELL NAME: UTAH 13-1167

OPERATOR: CONOCOPHILLIPS COMPANY (N2335)

PHONE NUMBER: 435-613-9777

CONTACT: JEAN SEMBORSKI

PROPOSED LOCATION:

SENE 13 150S 090E
 SURFACE: 2537 FNL 0269 FEL
 BOTTOM: 2537 FNL 0269 FEL
 COUNTY: CARBON
 LATITUDE: 39.52088 LONGITUDE: -110.8537
 UTM SURF EASTINGS: 512580 NORTHINGS: 4374383
 FIELD NAME: DRUNKARDS WASH (48)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering	DKD	2/6/06
Geology		
Surface		

LEASE TYPE: 3 - State

LEASE NUMBER: ML-39865

SURFACE OWNER: 3 - State

PROPOSED FORMATION: FRSD

COALBED METHANE WELL? YES

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Fed[] Ind[] Sta[] Fee[]
(No. 6196922)
- Potash (Y/N)
- Oil Shale 190-5 (B) or 190-3 or 190-13
- Water Permit
(No. MUNICIPAL)
- RDCC Review (Y/N)
(Date:)
- Fee Surf Agreement (Y/N)
- Intent to Commingle (Y/N)

LOCATION AND SITING:

- R649-2-3.
- Unit: DRUNKARDS WASH *OK*
- R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
- R649-3-3. Exception
- Drilling Unit
Board Cause No: 243-2
Eff Date: 7-13-1999
Siting: 460' fr u bery & uncomm. Tree
- R649-3-11. Directional Drill

COMMENTS:

Needs Permit (01-18-06)

STIPULATIONS:

1- STATEMENT OF BASIS

**DIVISION OF OIL, GAS AND MINING
APPLICATION FOR PERMIT TO DRILL
STATEMENT OF BASIS**

OPERATOR: ConocoPhillips Company
WELL NAME & NUMBER: Utah 13-1167
API NUMBER: 43-007-31116
LOCATION: 1/4,1/4 SENE Sec:13 TWP: 15 S RNG: 9 E 2537 FNL 269 FEL

Geology/Ground Water:

There are no aquifers with high quality ground water expected to be encountered. The proposed casing and cement program will adequately isolate any zones of water penetrated. There are numerous water rights filed by the operator on underground sources of water within a mile of this location.

Reviewer: Christopher J. Kierst **Date:** 1/31/06

Surface:

Proposed location is ~6 miles south of Price, Utah. The current surface use of the immediate area surrounding the proposed well is grazing and wildlife habitat. Access to this well will be along existing ConocoPhillips gas field roads and County maintained roads. Approximately 800' of new access road will be built for this location. The direct area drains to the northeast, towards Miller Creek, then eastward eventually into the Price River, a year-round live water source. This is a trial with "infield" drilling within the unit boundaries. 23 producing, shut-in, SWD, and/or PA wells are within a 1-mile radius of the above proposed well. Location layout, current surface status and characteristics, planned disturbances, access and utility route, and the reserve pit characteristics were all discussed. Jim Davis (SITLA), Gilbert Vasquez (ConocoPhillips), and Larry Jensen (NELCO) were in attendance. DWR and Carbon County were also invited but chose not to attend.

Reviewer: Mark L. Jones **Date:** January 19, 2006

Conditions of Approval/Application for Permit to Drill:

None.

ON-SITE PREDRILL EVALUATION
Division of Oil, Gas and Mining

OPERATOR: ConocoPhillips Company
WELL NAME & NUMBER: Utah 13-1167
API NUMBER: 43-007-31116
LEASE: State **FIELD/UNIT:** Drunkards Wash UTU-67921X
LOCATION: 1/4,1/4 SENE **Sec:** 13 **TWP:** 15S **RNG:** 9E 2537 **FNL** 269 **FEL**
LEGAL WELL SITING: 460' from unit boundary and uncommitted tracts.
GPS COORD (UTM): X =512594 E; Y =4374380 N **SURFACE OWNER:** SITLA.

PARTICIPANTS

M. Jones (DOGM), Jim Davis (SITLA), Gilbert Vasquez (ConocoPhillips), and Larry Jensen (NELCO) were in attendance. DWR and Carbon County were also invited but chose not to attend.

REGIONAL/LOCAL SETTING & TOPOGRAPHY

Proposed location is ~6 miles southwest of Price, Utah. The current surface use of the immediate area surrounding the proposed well is grazing and wildlife habitat. Access to this well will be along existing ConocoPhillips gas field roads and County maintained roads. Approximately 800' of new access road will be built for this location. The direct area drains to the northeast, towards Miller Creek, then eastward eventually into the Price River, a year-round live water source. Dry washes run through the immediate area of the proposed location.

SURFACE USE PLAN

CURRENT SURFACE USE: Grazing and wildlife habitat.

PROPOSED SURFACE DISTURBANCE: 175' x 235' w/ 50' x 50' x 10' (excluded) pit.

LOCATION OF EXISTING WELLS WITHIN A 1-MILE RADIUS: 23 producing, shut-in, SWD, and/or PA wells are within a 1-mile radius of the above proposed well.

LOCATION OF PRODUCTION FACILITIES AND PIPELINES: On location and along roadway.

SOURCE OF CONSTRUCTION MATERIAL: Obtained locally and trucked to site.

ANCILLARY FACILITIES: None anticipated.

WILL DRILLING AT THIS LOCATION GENERATE PUBLIC INTEREST OR CONCERNS? (EXPLAIN): No.

WASTE MANAGEMENT PLAN:

Portable chemical toilets which will be emptied into the municipal waste treatment system; garbage cans on location will be emptied into

centralized dumpsters which will be emptied into an approved landfill. Crude oil production is unlikely. Drilling fluid, completion / frac fluid and cuttings will be buried in the pit after evaporation and slashing the pit liner. Produced water will be gathered to the evaporation pit and eventually injected into the Navajo Sandstone via a salt-water disposal well. Used oil from drilling operations and support is hauled to a used oil recycler and reused.

ENVIRONMENTAL PARAMETERS

AFFECTED FLOODPLAINS AND/OR WETLANDS: Dry washes run throughout the immediate area.

FLORA/FAUNA: Sage, greasewood, cactus, 4-wing salt brush, grasses, etc.

SOIL TYPE AND CHARACTERISTICS: Clay loam.

EROSION/SEDIMENTATION/STABILITY: Erosive upon disturbance.

PALEONTOLOGICAL POTENTIAL: None observed.

RESERVE PIT

CHARACTERISTICS: Dugout earthen, 50'x50'x10', exterior to location.

LINER REQUIREMENTS (Site Ranking Form attached): None required.

SURFACE RESTORATION/RECLAMATION PLAN

As per surface use agreement.

SURFACE AGREEMENT: With SITLA lease.

CULTURAL RESOURCES/ARCHAEOLOGY: Completed by SencoPheonix.

OTHER OBSERVATIONS/COMMENTS

ATTACHMENTS

Photos of this location were taken and placed on file.

Mark L. Jones
DOGM REPRESENTATIVE

January 18, 2006 / 11:30 am
DATE/TIME

**Evaluation Ranking Criteria and Ranking Score
For Reserve and Onsite Pit Liner Requirements**

<u>Site-Specific Factors</u>	<u>Ranking</u>	<u>Site Ranking</u>
Distance to Groundwater (feet)		
>200	0	
100 to 200	5	
75 to 100	10	
25 to 75	15	
<25 or recharge area	20	<u>0</u>
Distance to Surf. Water (feet)		
>1000	0	
300 to 1000	2	
200 to 300	10	
100 to 200	15	
< 100	20	<u>0</u>
Distance to Nearest Municipal Well (feet)		
>5280	0	
1320 to 5280	5	
500 to 1320	10	
<500	20	<u>0</u>
Distance to Other Wells (feet)		
>1320	0	
300 to 1320	10	
<300	20	<u>0</u>
Native Soil Type		
Low permeability	0	
Mod. permeability	10	
High permeability	20	<u>0</u>
Fluid Type		
Air/mist	0	
Fresh Water	5	
TDS >5000 and <10000	10	
TDS >10000 or Oil Base Mud Fluid	15	
containing significant levels of hazardous constituents	20	<u>0</u>
Drill Cuttings		
Normal Rock	0	
Salt or detrimental	10	<u>0</u>
Annual Precipitation (inches)		
<10	0	
10 to 20	5	
>20	10	<u>5</u>
Affected Populations		
<10	0	
10 to 30	6	
30 to 50	8	
>50	10	<u>0</u>
Presence of Nearby Utility Conduits		
Not Present	0	
Unknown	10	
Present	15	<u>0</u>

Final Score 5 (Level III Sensitivity)

Sensitivity Level I = 20 or more; total containment is required, consider criteria for excluding pit use.

Sensitivity Level II = 15-19; lining is discretionary.

Sensitivity Level III = below 15; no specific lining is required.



01-18-2006 11:15



01-18-2006 11:15





State Online Services

Agency List

Business.utah.gov

Search Utah.gov



UTAH DIVISION OF WATER RIGHTS

WRPLAT Program Output Listing

Version: 2004.12.30.00 Rundate: 01/31/2006 05:30 PM

Radius search of 5280 feet from a point S2537 W269 from the NE corner, section 13, Township 15S, Range 9E, SL b&m Criteria:wrtypes=W,C,E podtypes=S,U,D,Sp,P status=U,A,P usetypes=all

WR Number	Diversion Type/Location	Well Log	Status	Priority	Uses	CFS	ACFT	Owner Name
<u>91-4952</u>	Underground S1276 E1301 NW 13 15S 9E SL		A	19930623	IMOS	5.000	0.000	CONOCOPHILLIPS COMPANY P. O. BOX 851
<u>91-4952</u>	Underground N1320 E1320 SW 13 15S 9E SL		A	19930623	IMOS	5.000	0.000	CONOCOPHILLIPS COMPANY P. O. BOX 851
<u>91-4952</u>	Underground S590 E1612 NW 24 15S 9E SL		A	19930623	IMOS	5.000	0.000	CONOCOPHILLIPS COMPANY P. O. BOX 851
<u>91-4952</u>	Underground N1158 W1494 SE 12 15S 9E SL		A	19930623	IMOS	5.000	0.000	CONOCOPHILLIPS COMPANY P. O. BOX 851
<u>91-4952</u>	Underground N1800 W1500 SE 13 15S 9E SL		A	19930623	IMOS	5.000	0.000	CONOCOPHILLIPS COMPANY P. O. BOX 851
<u>91-4952</u>	Underground S1320 W1200 NE 13 15S 9E SL		A	19930623	IMOS	5.000	0.000	CONOCOPHILLIPS COMPANY P. O. BOX 851
<u>91-4952</u>	Underground S1780 E660 NW 19 15S 10E SL		A	19930623	IMOS	5.000	0.000	CONOCOPHILLIPS COMPANY P. O. BOX 851
<u>91-4952</u>	Underground N2100 E1100 SW 18 15S 10E SL		A	19930623	IMOS	5.000	0.000	CONOCOPHILLIPS COMPANY P. O. BOX 851
<u>91-4952</u>	Underground N1180 E1250 SW 07 15S 10E SL		A	19930623	IMOS	5.000	0.000	CONOCOPHILLIPS COMPANY P. O. BOX 851
<u>91-4952</u>	Underground S1320 E1320 NW 18 15S 10E SL		A	19930623	IMOS	5.000	0.000	CONOCOPHILLIPS COMPANY P. O. BOX 851
<u>91-4952</u>	Underground S1110 W2127 NE 18 15S 10E SL		A	19930623	IMOS	5.000	0.000	CONOCOPHILLIPS COMPANY P. O. BOX 851

<u>91-4952</u>	Underground N1400 W2100 SE 07 15S 10E SL	A	19930623 IMOS	5.000 0.000	CONOCOPHILLIPS COMPANY P. O. BOX 851
<u>91-4980</u>	Surface S2350 W1500 NE 13 15S 9E SL	A	19960126 S	0.000 4.730	UTAH SCHOOL AND INSTITUTIONAL TRUST LANDS ADMIN. 675 EAST 500 SOUTH, 5TH FLOOR
<u>91-4981</u>	Surface N1400 E800 SW 12 15S 9E SL	A	19951127 S	0.000 4.730	UTAH SCHOOL AND INSTITUTIONAL TRUST LANDS ADMIN. 675 EAST 500 SOUTH, 5TH FLOOR
<u>a19276</u>	Underground S1276 E1301 NW 13 15S 9E SL	A	19950831 IMS	5.000 0.000	CONOCOPHILLIPS COMPANY P. O. BOX 851
<u>a19276</u>	Underground N1320 E1320 SW 13 15S 9E SL	A	19950831 IMS	5.000 0.000	CONOCOPHILLIPS COMPANY P. O. BOX 851
<u>a19276</u>	Underground S590 E1612 NW 24 15S 9E SL	A	19950831 IMS	5.000 0.000	CONOCOPHILLIPS COMPANY P. O. BOX 851
<u>a19276</u>	Underground N1158 W1494 SE 12 15S 9E SL	A	19950831 IMS	5.000 0.000	CONOCOPHILLIPS COMPANY P. O. BOX 851
<u>a19276</u>	Underground N1800 W1500 SE 13 15S 9E SL	A	19950831 IMS	5.000 0.000	CONOCOPHILLIPS COMPANY P. O. BOX 851
<u>a19276</u>	Underground S1320 W1200 NE 13 15S 9E SL	A	19950831 IMS	5.000 0.000	CONOCOPHILLIPS COMPANY P. O. BOX 851
<u>a19276</u>	Underground S1780 E660 NW 19 15S 10E SL	A	19950831 IMS	5.000 0.000	CONOCOPHILLIPS COMPANY P. O. BOX 851
<u>a19276</u>	Underground N2100 E1100 SW 18	A	19950831 IMS	5.000 0.000	CONOCOPHILLIPS COMPANY

<u>a19276</u>	15S 10E SL Underground	A	19950831 IMS	5.000 0.000	P. O. BOX 851 CONOCOPHILLIPS COMPANY
	N1180 E1250 SW 07 15S 10E SL				P. O. BOX 851
<u>a19276</u>	Underground	A	19950831 IMS	5.000 0.000	CONOCOPHILLIPS COMPANY
	S1320 E1320 NW 18 15S 10E SL				P. O. BOX 851
<u>a19276</u>	Underground	A	19950831 IMS	5.000 0.000	CONOCOPHILLIPS COMPANY
	S1110 W2127 NE 18 15S 10E SL				P. O. BOX 851
<u>a19276</u>	Underground	A	19950831 IMS	5.000 0.000	CONOCOPHILLIPS COMPANY
	N1400 W2100 SE 07 15S 10E SL				P. O. BOX 851

[Natural Resources](#) | [Contact](#) | [Disclaimer](#) | [Privacy Policy](#) | [Accessibility Policy](#)

02-06 ConocoPhillips Utah 11167
Casing Schematic

Mancos

Surface

8-5/8"
MW 8.4
Frac 19.3

TOC @ 0.
TOC @ 0.
Surface
400. MD

61 17% washout

BHP

$$(.052)(9)(2347) = 1098$$

Anticipate 1039

Gos

$$(.12)(2347) = 281$$

MASP = 817

~~232 TOC Tail~~

BOPE - 3,000 ✓

Surf Csg - 2950

$$70\% = 2065$$

61 6% Washout

Max pressure Surf Csg shoe = 800 psi

✓ Test to 800# (propose 500)
(Surface pressure)

1524 TOC Tail

1853' Blue Gate Ferron

5-1/2"
MW 9.

Production
2347. MD

Well name:	02-06 ConocoPhillips Utah 13-1167		
Operator:	ConocoPhillips Company		
String type:	Surface	Project ID:	43-007-31116
Location:	Carbon County		

Design parameters:

Collapse

Mud weight: 8.400 ppg
 Design is based on evacuated pipe.

Minimum design factors:

Collapse:

Design factor 1.125

Burst:

Design factor 1.00

Environment:

H2S considered? No
 Surface temperature: 65 °F
 Bottom hole temperature: 71 °F
 Temperature gradient: 1.40 °F/100ft
 Minimum section length: 250 ft

Cement top: Surface

Burst

Max anticipated surface pressure: 352 psi
 Internal gradient: 0.120 psi/ft
 Calculated BHP 400 psi

No backup mud specified.

Tension:

8 Round STC: 1.80 (J)
 8 Round LTC: 1.80 (J)
 Buttress: 1.60 (J)
 Premium: 1.50 (J)
 Body yield: 1.50 (B)

Tension is based on buoyed weight.
 Neutral point: 349 ft

Non-directional string.

Re subsequent strings:

Next setting depth: 2,347 ft
 Next mud weight: 9.000 ppg
 Next setting BHP: 1,097 psi
 Fracture mud wt: 19.250 ppg
 Fracture depth: 400 ft
 Injection pressure 400 psi

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	400	8.625	24.00	J-55	ST&C	400	400	7.972	19.3
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	175	1370	7.851	400	2950	7.38	8	244	29.09 J

Prepared by: Clinton Dworshak
 Utah Div. of Oil & Mining

Phone: 801-538-5280
 FAX: 810-359-3940

Date: February 1, 2006
 Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 400 ft, a mud weight of 8.4 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

Well name:	02-06 ConocoPhillips Utah 13-1167		
Operator:	ConocoPhillips Company		
String type:	Production	Project ID:	43-007-31116
Location:	Carbon County		

Design parameters:

Collapse

Mud weight: 9.000 ppg
 Design is based on evacuated pipe.

Burst

Max anticipated surface pressure: 816 psi
 Internal gradient: 0.120 psi/ft
 Calculated BHP: 1,097 psi

 No backup mud specified.

Minimum design factors:

Collapse:

Design factor: 1.125

Burst:

Design factor: 1.00

Tension:

8 Round STC: 1.80 (J)
 8 Round LTC: 1.80 (J)
 Buttress: 1.60 (J)
 Premium: 1.50 (J)
 Body yield: 1.50 (B)

Tension is based on buoyed weight.
 Neutral point: 2,027 ft

Environment:

H2S considered? No
 Surface temperature: 65 °F
 Bottom hole temperature: 98 °F
 Temperature gradient: 1.40 °F/100ft
 Minimum section length: 1,500 ft

Cement top: Surface

Non-directional string.

Run Seq	Segment Length (ft)	Size (in)	Nominal Weight (lbs/ft)	Grade	End Finish	True Vert Depth (ft)	Measured Depth (ft)	Drift Diameter (in)	Internal Capacity (ft³)
1	2347	5.5	17.00	N-80	LT&C	2347	2347	4.767	80.9
Run Seq	Collapse Load (psi)	Collapse Strength (psi)	Collapse Design Factor	Burst Load (psi)	Burst Strength (psi)	Burst Design Factor	Tension Load (Kips)	Tension Strength (Kips)	Tension Design Factor
1	1097	6290	5.732	1097	7740	7.05	34	348	10.10 J

Prepared by: Clinton Dworshak
 Utah Div. of Oil & Mining

Phone: 801-538-5280
 FAX: 810-359-3940

Date: February 1, 2006
 Salt Lake City, Utah

Remarks:

Collapse is based on a vertical depth of 2347 ft, a mud weight of 9 ppg. The casing is considered to be evacuated for collapse purposes. Collapse strength is based on the Westcott, Dunlop & Kemler method of biaxial correction for tension.

Burst strength is not adjusted for tension.

Engineering responsibility for use of this design will be that of the purchaser.

From: Ed Bonner
To: Whitney, Diana
Date: 2/28/2006 4:02:30 PM
Subject: Well Clearance

The following wells have been given cultural resource clearance by the Trust Lands Cultural Resources Group:

ConocoPhillips Company

Utah 26-1198
Utah 26-1197
Utah 13-1167
Utah 11-1157
Utah 11-1159
Utah 11-1158
Utah 07-1230
Utah 07-1229
Utah 06-1228
Utah 35-1080
Utah 26-1055

Questar Exploration & Production

BZ 10ML-16-8-24
BZ 12ML-16-8-24
BZ 14ML-16-8-24

If you have any questions regarding this matter please give me a call.

CC: Davis, Jim; Garrison, LaVonne; Hill, Brad; Hunt, Gil



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

March 2, 2006

ConocoPhillips Company
P O Box 851
Price, UT 84501

Re: Utah 13-1167 Well, 2537' FNL, 269' FEL, SE NE, Sec. 13, T. 15 South,
R. 9 East, Carbon County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-007-31116.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Carbon County Assessor
SITLA
Bureau of Land Management, Moab District Office

Operator: ConocoPhillips Company
Well Name & Number Utah 13-1167
API Number: 43-007-31116
Lease: ML-39865

Location: SE NE Sec. 13 T. 15 South R. 9 East

Conditions of Approval

1. **General**

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for Permit to Drill.

2. **Notification Requirements**

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- 24 hours prior to cementing or testing casing
- 24 hours prior to testing blowout prevention equipment
- 24 hours prior to spudding the well
- within 24 hours of any emergency changes made to the approved drilling program
- prior to commencing operations to plug and abandon the well

The following are Division of Oil, Gas and Mining contacts and their work telephone numbers (please leave a voice mail message if the person is not available to take the call):

- Dan Jarvis at (801) 538-5338
- Carol Daniels at (801) 538-5284 (spud)

3. **Reporting Requirements**

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. Compliance with the State of Utah Antiquities Act forbids disturbance of archeological, historical, or paleontological remains. Should archeological, historical or paleontological remains be encountered during your operations, you are required to immediately suspend all operations and immediately inform the Trust Lands Administration and the Division of State History of the discovery of such remains.

5. Compliance with the Conditions of Approval/Application for Permit to Drill outlined in the Statement of Basis. (Copy Attached)

CONFIDENTIAL

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

5. LEASE DESIGNATION AND SERIAL NUMBER:
ML-39865

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
N/A

7. UNIT or CA AGREEMENT NAME:
Drunkards Wash UTU-67921X

8. WELL NAME and NUMBER:
Utah 13-1167

9. API NUMBER:
4300731116

10. FIELD AND POOL, OR WILDCAT:
Drunkards Wash

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL GAS WELL OTHER _____

2. NAME OF OPERATOR:
ConocoPhillips Company

3. ADDRESS OF OPERATOR: P.O. Box 51810 CITY Midland STATE TX ZIP 79710-1810 PHONE NUMBER: (432) 688-6943

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 2537' FNL & 269' FEL COUNTY: Carbon
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SENE 13 15S 8E STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: <u>3/2/2007</u>	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Permit Renewal</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

ConocoPhillips Company respectfully requests that the approval of the Application for Permit to Drill for the referenced well be extended. The current approval will expire on March 2, 2007.

The location has been built for this well.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 02-07-07
By: [Signature]

2-9-07
RM

NAME (PLEASE PRINT) Donna Williams TITLE Sr. Regulatory Analyst
SIGNATURE [Signature] DATE 2/5/07

(This space for State use only)

RECEIVED
FEB 0 / 2007
DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-007-31116
Well Name: Utah 13-1167
Location: SE/4 NE/4 Section 13, T15S, R9E
Company Permit Issued to: ConocoPhillips Company
Date Original Permit Issued: 3/2/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

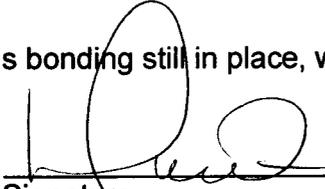
Signature

1/28/2007

Date

Title: Sr. Regulatory Analyst

Representing: ConocoPhillips Company

RECEIVED

FEB 07 2007

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

			5. LEASE DESIGNATION AND SERIAL NUMBER: ML-39865
			6. IF INDIAN, ALLOTTEE OR TRIBE NAME: NA
			7. UNIT or CA AGREEMENT NAME: Drunkards Wash UTU-67921X
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____			8. WELL NAME and NUMBER: Utah 13-1167
2. NAME OF OPERATOR: ConocoPhillips Company			9. API NUMBER: 4300731116
3. ADDRESS OF OPERATOR: P. O. Box 51810		CITY Midland STATE TX ZIP 79710	PHONE NUMBER: (432) 688-6943
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2537' FNL & 269' FEL			10. FIELD AND POOL, OR WILDCAT: Drunkards Wash
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SENE 13 15S 9E			COUNTY: Carbon
			STATE: UTAH


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: <u>2/7/2008</u>	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Permit Renewal</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	


12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

ConocoPhillips Company respectfully requests that the approval of the Application for Permit to Drill for the referenced well be extended. The current approval will expire on February 7, 2008.

Approved by the
Utah Division of
Oil, Gas and Mining

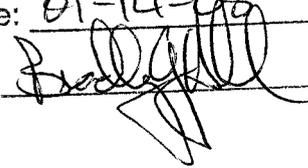Date: 01-14-08
By: 

COPY SENT TO OPERATOR
Date: 1-16-2008
Initials: KS

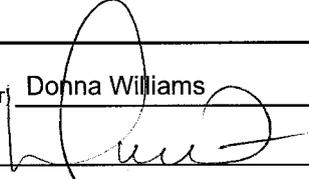NAME (PLEASE PRINT) Donna Williams	TITLE Sr. Regulatory Specialist
SIGNATURE 	DATE 1/7/2008

(This space for State use only)

RECEIVED
JAN 11 2008



**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4300731116
Well Name: Utah 13-1167
Location: SENE Sec 13, T15S, R9E, Carbon Co.
Company Permit Issued to: ConocoPhillips Company
Date Original Permit Issued: 3/2/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes No

Has the approved source of water for drilling changed? Yes No

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

Is bonding still in place, which covers this proposed well? Yes No

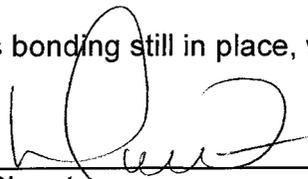

 Signature

1/7/2008

 Date

Title: Sr. Regulatory Specialist

Representing: ConocoPhillips Company

**RECEIVED
JAN 11 2008**

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

CONFIDENTIAL

<p>5. LEASE DESIGNATION AND SERIAL NUMBER: ML-39865</p>	
<p>SUNDRY NOTICES AND REPORTS ON WELLS</p>	
<p>6. IF INDIAN, ALLOTTEE OR TRIBE NAME: NA</p>	
<p>7. UNIT or CA AGREEMENT NAME: Drunkards Wash UTU-67921X</p>	
<p>8. WELL NAME and NUMBER: Utah 13-1167</p>	
<p>9. API NUMBER: 4300731116</p>	
<p>10. FIELD AND POOL, OR WILDCAT: Drunkards Wash</p>	
<p>1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____</p>	
<p>2. NAME OF OPERATOR: ConocoPhillips Company</p>	
<p>3. ADDRESS OF OPERATOR: P. O. Box 51810 CITY Midland STATE TX ZIP 79710 PHONE NUMBER: (432) 688-6943</p>	
<p>4. LOCATION OF WELL FOOTAGES AT SURFACE: 2537' FNL & 269' FEL COUNTY: Carbon QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SENE 13 15S 9E STATE: UTAH</p>	


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: <u>6/9/2008</u>	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion:	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input checked="" type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

ConocoPhillips respectfully requests approval to amend the cement program on the above referenced well. It is our intent to cement the production string pumping a single stage cement job as follows: Pump 410 sxs 50:50 Class G + 2% D20 + .2% D65 + .1% D46 + .2% D167 + .125 pps D130 (14.1 ppg/1.30 ft3/sx). If during the drilling of the production hole, operations and hole conditions indicate the need to pump a two stage cement job, then it is our intent to utilize the 2 stage job as approved on the original permit to drill.

COPY SENT TO OPERATOR
Date: 6.2.2008
Initials: KS

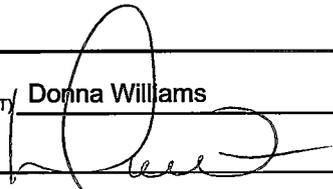NAME (PLEASE PRINT) <u>Donna Williams</u>	TITLE <u>Sr. Regulatory Specialist</u>
SIGNATURE 	DATE <u>5/8/2008</u>

(This space for State use only)


APPROVED BY THE STATE OF UTAH DIVISION OF OIL, GAS, AND MINING
DATE: 5/28/08
BY: [Signature] (See Instructions on Reverse Side)

RECEIVED
MAY 12 2008
DIV. OF OIL, GAS & MINING

(5/2000)

02-06 ConocoPhillips Utah 13-1167rev5-08

Casing Schematic

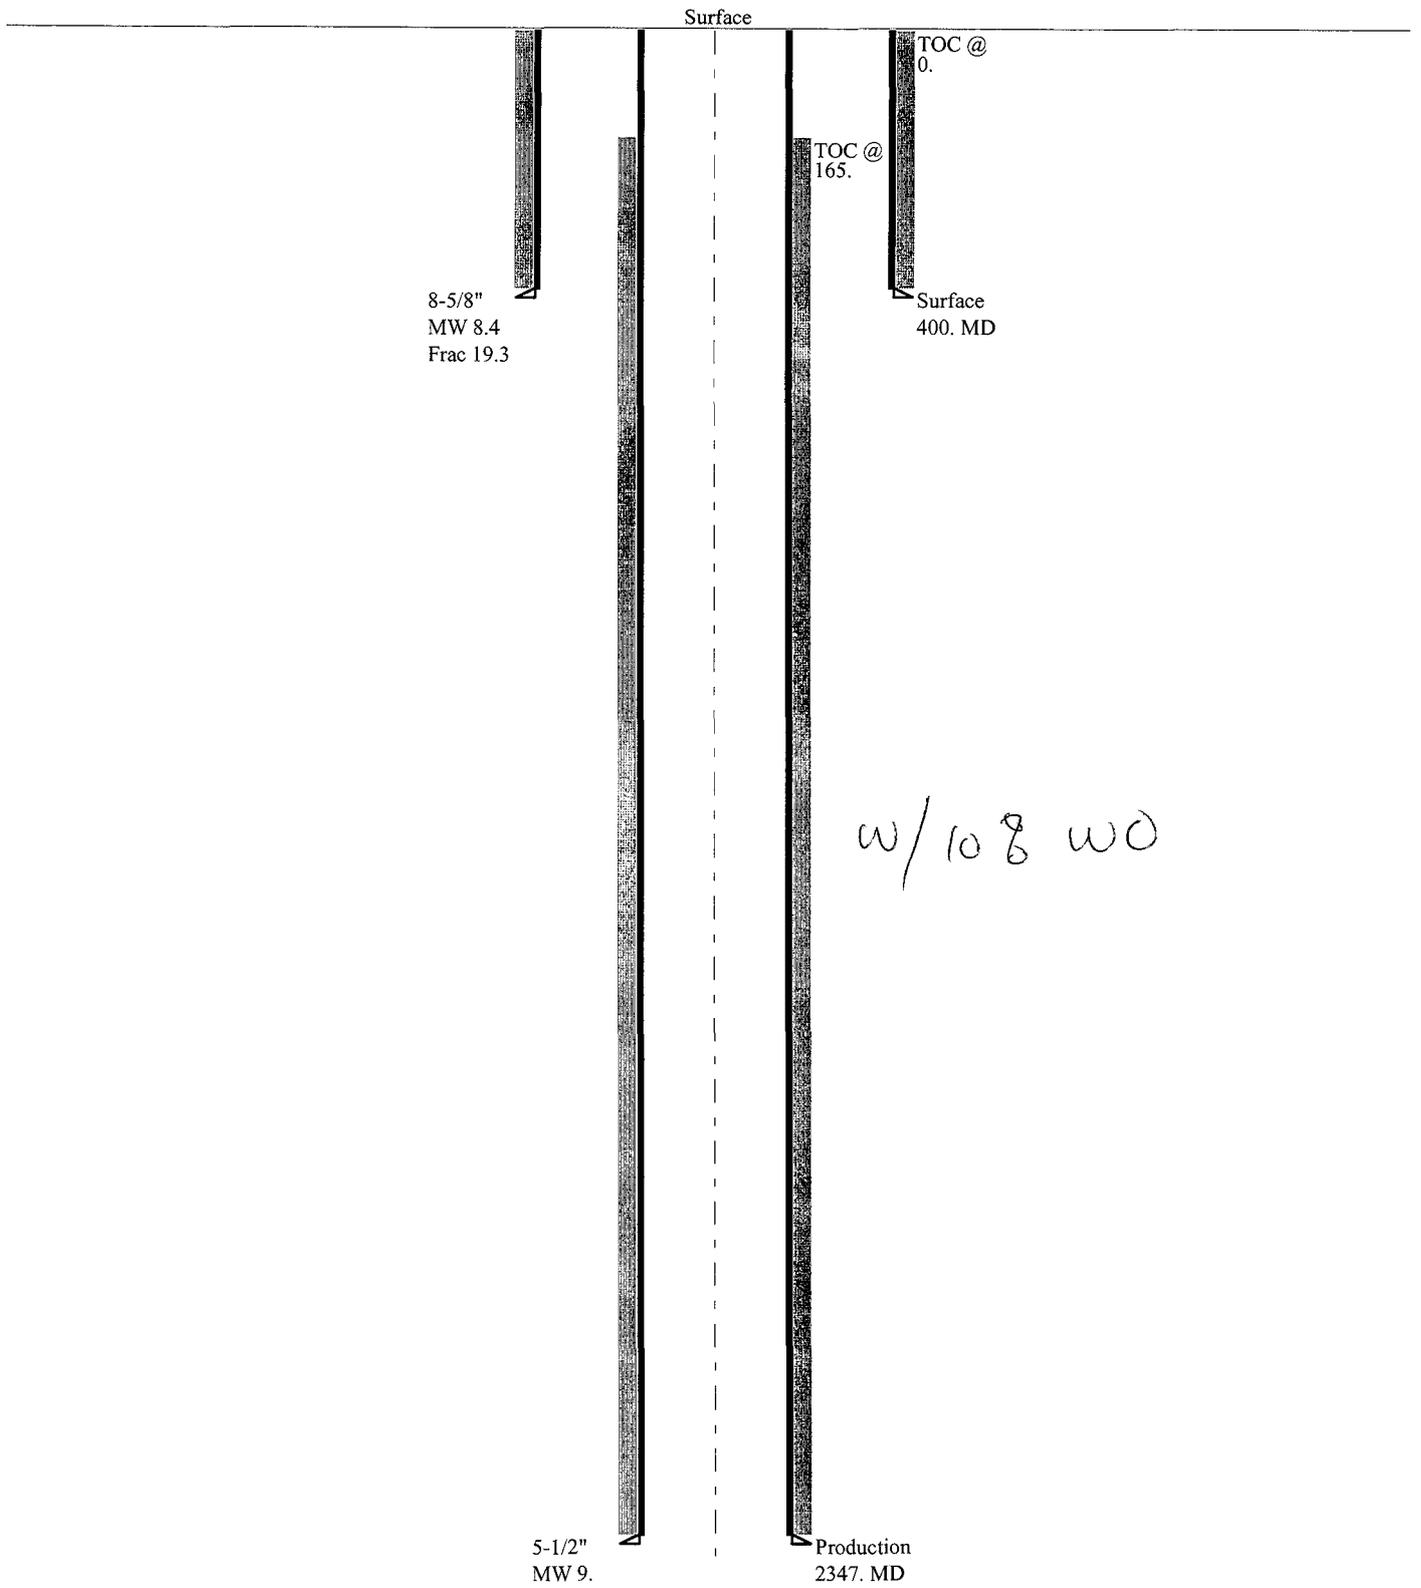

CONFIDENTIAL

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

Name of Company: ConocoPhillips Company

Well Name: Utah 13-1167

API No: 43-007-31116 Lease Type: State

Section 13 Township 15S Range 09E County Carbon

Drilling Contractor Pete Martin Rig # Rathole

SPUDDED:

Date 6-19-08

Time 1:00 PM

How Dry

Drilling will Commence: _____

Reported by Mike Johnson

Telephone # 307-851-5824

Date 6-19-08 Signed RM

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: ConocoPhillips Company Operator Account Number: N 2335
 Address: P. O. Box 51810
city Midland
state Tx zip 79710 Phone Number: (432) 688-6943

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
4300731116	Utah 13-1167		SENE	13	15S	9E	Carbon
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
B	99999	11256	6/19/2008			6/30/08	
Comments: <u>FRSD</u>							CONFIDENTIAL

Well 2


API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
Comments:							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
Comments:							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

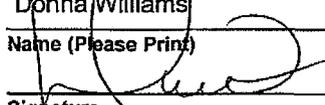Donna Williams
 Name (Please Print)

 Signature
 Sr. Regulatory Specialist
 Title
 6/26/2008
 Date

RECEIVED
JUN 26 2008

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER:
ML-39865

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
NA

7. UNIT or CA AGREEMENT NAME:
Drunkards Wash UTU-67921X

8. WELL NAME and NUMBER:
Utah 13-1167

9. API NUMBER:
4300731116

10. FIELD AND POOL, OR WILDCAT:
Drunkards Wash

1. TYPE OF WELL
OIL WELL GAS WELL OTHER _____

2. NAME OF OPERATOR:
ConocoPhillips Company

3. ADDRESS OF OPERATOR:
P. O. Box 51810 CITY Midland STATE TX ZIP 79710 PHONE NUMBER: (432) 688-6943

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 2537' FNL & 269' FEL COUNTY: Carbon
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SENE 13 15S 9E STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit In Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: 6/19/2008	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: Spud well
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

6/19/08: Spud 20" conductor hole. Drilled to 42'. Set 13 3/8", 54.5#, conductor casing @ 42', cemented with 8 sacks ready mix cement.

RECEIVED
JUN 26 2008
DIV. OF OIL, GAS & MINING

NAME (PLEASE PRINT) Donna Williams TITLE Sr. Regulatory Specialist

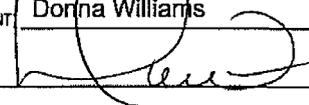SIGNATURE  DATE 6/26/2008

(This space for State use only)

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

5. LEASE DESIGNATION AND SERIAL NUMBER:
ML 39865

SUNDRY NOTICES AND REPORTS ON WELLS

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
N/A

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

7. UNIT or CA AGREEMENT NAME:
Drunkards Wash

1. TYPE OF WELL OIL WELL GAS WELL OTHER _____

8. WELL NAME and NUMBER:
Utah 13-1167

2. NAME OF OPERATOR:
ConocoPhillips Company

9. API NUMBER:
4300731116

3. ADDRESS OF OPERATOR:
P.O. Box 51810 CITY Midland STATE Tx ZIP 79710

PHONE NUMBER:
(432) 688-6943

10. FIELD AND POOL, OR WILDCAT:
Drunkards Wash

4. LOCATION OF WELL
FOOTAGES AT SURFACE: 2537 FNL & 269 FEL

COUNTY: Carbon

QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: SENE 13 15S 9E

STATE: UTAH


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: 9/30/2008	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>First Sales</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

The above well had first sales on 9/30/2008. The well produced 4 mcf gas and 38 water.

NAME (PLEASE PRINT) Donna Williams TITLE Sr. Regulatory Specialist

SIGNATURE  DATE 10/1/2008

(This space for State use only)

RECEIVED
OCT 02 2008
DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

AMENDED REPORT FORM 8
(highlight changes)

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

5. LEASE DESIGNATION AND SERIAL NUMBER:
ML 39865

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
N/A

7. UNIT or CA AGREEMENT NAME:
Drunkards Wash

8. WELL NAME and NUMBER:
Utah 13-1167

9. API NUMBER:
4300731116

10. FIELD AND POOL, OR WILDCAT:
Drunkards Wash

11. QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:
SENE 13 15S 9E

12. COUNTY:
Carbon

13. STATE:
UTAH

1a. TYPE OF WELL: OIL WELL GAS WELL DRY OTHER _____

b. TYPE OF WORK: NEW WELL HORIZ. LATS. DEEP-EN RE-ENTRY DIFF. RESVR. OTHER _____

2. NAME OF OPERATOR:
ConocoPhillips Company

3. ADDRESS OF OPERATOR: P.O. Box 51810 CITY **Midland** STATE **Tx** ZIP **79710** PHONE NUMBER: **(432) 688-6943**

4. LOCATION OF WELL (FOOTAGES)
AT SURFACE: **2537 FNL & 269 FEL**
AT TOP PRODUCING INTERVAL REPORTED BELOW:
AT TOTAL DEPTH: **Same**

14. DATE SPUDDED: **6/19/2008** 15. DATE T.D. REACHED: **7/15/2008** 16. DATE COMPLETED: **9/25/2008** ABANDONED READY TO PRODUCE

17. ELEVATIONS (DF, RKB, RT, GL):
5707.5' GL

18. TOTAL DEPTH: MD **2,363** TVD _____ 19. PLUG BACK T.D.: MD **2,295** TVD _____ 20. IF MULTIPLE COMPLETIONS, HOW MANY? * **1** 21. DEPTH BRIDGE MD _____ PLUG SET: TVD _____

22. TYPE ELECTRIC AND OTHER MECHANICAL LOGS RUN (Submit copy of each)
CCL/GR
DIG, GR, CD, CN

23. WAS WELL CORED? NO YES (Submit analysis)
WAS DST RUN? NO YES (Submit report)
DIRECTIONAL SURVEY? NO YES (Submit copy)

24. CASING AND LINER RECORD (Report all strings set in well)

HOLE SIZE	SIZE/GRADE	WEIGHT (#/ft.)	TOP (MD)	BOTTOM (MD)	STAGE CEMENTER DEPTH	CEMENT TYPE & NO. OF SACKS	SLURRY VOLUME (BBL)	CEMENT TOP **	AMOUNT PULLED
20"	13 3/8 cond	54.5	0	42		Redym 8		Surface	
11"	8 5/8 J55	24	0	391		G 185		Surface	
7 7/8	5 1/2 M80	17	0	2,353		G 140		Surface	
						G 170			

25. TUBING RECORD

SIZE	DEPTH SET (MD)	PACKER SET (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
2 7/8	2,079							

26. PRODUCING INTERVALS

FORMATION NAME	TOP (MD)	BOTTOM (MD)	TOP (TVD)	BOTTOM (TVD)	INTERVAL (Top/Bot - MD)	SIZE	NO. HOLES	PERFORATION STATUS
(A) Ferron	1,874	1,892			1,874 1,892	4 spf	32	Open <input checked="" type="checkbox"/> Squeezed <input type="checkbox"/>
(B) Ferron	1,946	1,963			1,946 1,963	4 spf	48	Open <input checked="" type="checkbox"/> Squeezed <input type="checkbox"/>
(C)								Open <input type="checkbox"/> Squeezed <input type="checkbox"/>
(D)								Open <input type="checkbox"/> Squeezed <input type="checkbox"/>

27. PERFORATION RECORD

28. ACID, FRACTURE, TREATMENT, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL	AMOUNT AND TYPE OF MATERIAL
1874-1892	F w/497 sxs 16/30 brown sand + 831 bbls delta frac 140R
1946-1963	F w/770 sxs 16/30 brown sand + 1340 bbls delta frac 140R

29. ENCLOSED ATTACHMENTS:

ELECTRICAL/MECHANICAL LOGS GEOLOGIC REPORT DST REPORT DIRECTIONAL SURVEY

SUNDRY NOTICE FOR PLUGGING AND CEMENT VERIFICATION CORE ANALYSIS OTHER: _____

30. WELL STATUS:
Producing

31. INITIAL PRODUCTION

INTERVAL A (As shown in item #26)

DATE FIRST PRODUCED: 9/30/2008	TEST DATE: 9/30/2008	HOURS TESTED: 24	TEST PRODUCTION RATES: →	OIL - BBL: 0	GAS - MCF: 4	WATER - BBL: 38	PROD. METHOD: P
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	INTERVAL STATUS: Open

INTERVAL B (As shown in item #26)

DATE FIRST PRODUCED:	TEST DATE:	HOURS TESTED:	TEST PRODUCTION RATES: →	OIL - BBL:	GAS - MCF:	WATER - BBL:	PROD. METHOD:
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	INTERVAL STATUS:

INTERVAL C (As shown in item #26)

DATE FIRST PRODUCED:	TEST DATE:	HOURS TESTED:	TEST PRODUCTION RATES: →	OIL - BBL:	GAS - MCF:	WATER - BBL:	PROD. METHOD:
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	INTERVAL STATUS:

INTERVAL D (As shown in item #26)

DATE FIRST PRODUCED:	TEST DATE:	HOURS TESTED:	TEST PRODUCTION RATES: →	OIL - BBL:	GAS - MCF:	WATER - BBL:	PROD. METHOD:
CHOKE SIZE:	TBG. PRESS.	CSG. PRESS.	API GRAVITY	BTU - GAS	GAS/OIL RATIO	24 HR PRODUCTION RATES: →	INTERVAL STATUS:

32. DISPOSITION OF GAS (Sold, Used for Fuel, Vented, Etc.)

Sold

33. SUMMARY OF POROUS ZONES (Include Aquifers):


Show all important zones of porosity and contents thereof. Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

34. FORMATION (Log) MARKERS:

Formation	Top (MD)	Bottom (MD)	Descriptions, Contents, etc.	Name	Top (Measured Depth)
				T/Blugate	1,685
				T/Ferron	1,831
				T/Coal	1,873
				B/Coal	1,964
				T/Tunuck	2,062

35. ADDITIONAL REMARKS (Include plugging procedure)

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records.

NAME (PLEASE PRINT) Donna Williams TITLE Sr. Regulatory Specialist
 SIGNATURE  DATE 11/5/2008

This report must be submitted within 30 days of

- completing or plugging a new well
- drilling horizontal laterals from an existing well bore
- recompleting to a different producing formation
- reentering a previously plugged and abandoned well
- significantly deepening an existing well bore below the previous bottom-hole depth
- drilling hydrocarbon exploratory holes, such as core samples and stratigraphic tests

* ITEM 20: Show the number of completions if production is measured separately from two or more formations.

** ITEM 24: Cement Top - Show how reported top(s) of cement were determined (circulated (CIR), calculated (CAL), cement bond log (CBL), temperature survey (TS)).

Send to: Utah Division of Oil, Gas and Mining
 1594 West North Temple, Suite 1210
 Box 145801
 Salt Lake City, Utah 84114-5801

Phone: 801-538-5340
 Fax: 801-359-3940