

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. TYPE OF WORK  
 DRILL       DEEPEN       PLUG BACK

b. TYPE OF WELL  
 OIL WELL       GAS WELL       OTHER       SINGLE ZONE       MULTIPLE ZONE

2. NAME OF OPERATOR  
 Inland Production Company

3. ADDRESS OF OPERATOR  
 P.O. Box 1446 Roosevelt, Utah 84066

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)\*  
 At surface NE/SW  
 At proposed prod. zone 1980' FWL & 1980' FSL

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE\*  
 7.4 miles south of Myton, Utah

15. DISTANCE FROM PROPOSED\* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drilg. unit line, if any) 1980'

16. NO. OF ACRES IN LEASE 960

17. NO. OF ACRES ASSIGNED TO THIS WELL 40

18. DISTANCE FROM PROPOSED\* LOCATION TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT. 1320'

19. PROPOSED DEPTH 6500'

20. ROTARY OR CABLE TOOLS Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.) 5429' GR

22. APPROX. DATE WORK WILL START\* 2nd quarter 1996

5. LEASE DESIGNATION AND SERIAL NO.  
 U-67170

6. IF INDIAN ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME  
 Mon Butte Federal Northea

9. WELL NO.  
 #11-24

10. FIELD AND POOL, OR WILDCAT

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
 Sec. 24, T8S, R16E

12. COUNTY OR PARISH  
 Duchesne

13. STATE  
 Utah

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4	8 5/8	24#	300'	120 sx Class G+2% CaCl+2% Gel
7 7/8	5 1/2	15.5#	TD	400 sx Hilift followed by 330 sx Class G w/ 10% CaCl

The actual cement volumes will be calculated off of the open hole logs, plus 15% excess.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED Brad Mechem *Brad Mechem* TITLE Operations Manager DATE 3/22/96


(This space for Federal or State office use)

PERMIT NO. 43-013-31633 APPROVAL DATE \_\_\_\_\_  
 APPROVED BY *Matthew* TITLE Petroleum Engineer DATE 6/25/96  
 CONDITIONS OF APPROVAL, IF ANY \_\_\_\_\_

\*See Instructions On Reverse Side

**INLAND PRODUCTION CO.  
WELL LOCATION PLAT  
MONUMENT BUTTE N.E. UNIT #11-24**

LOCATED IN THE NE1/4 OF THE SW1/4  
SECTION 24, T8S, R16E, S.L.B.&M.

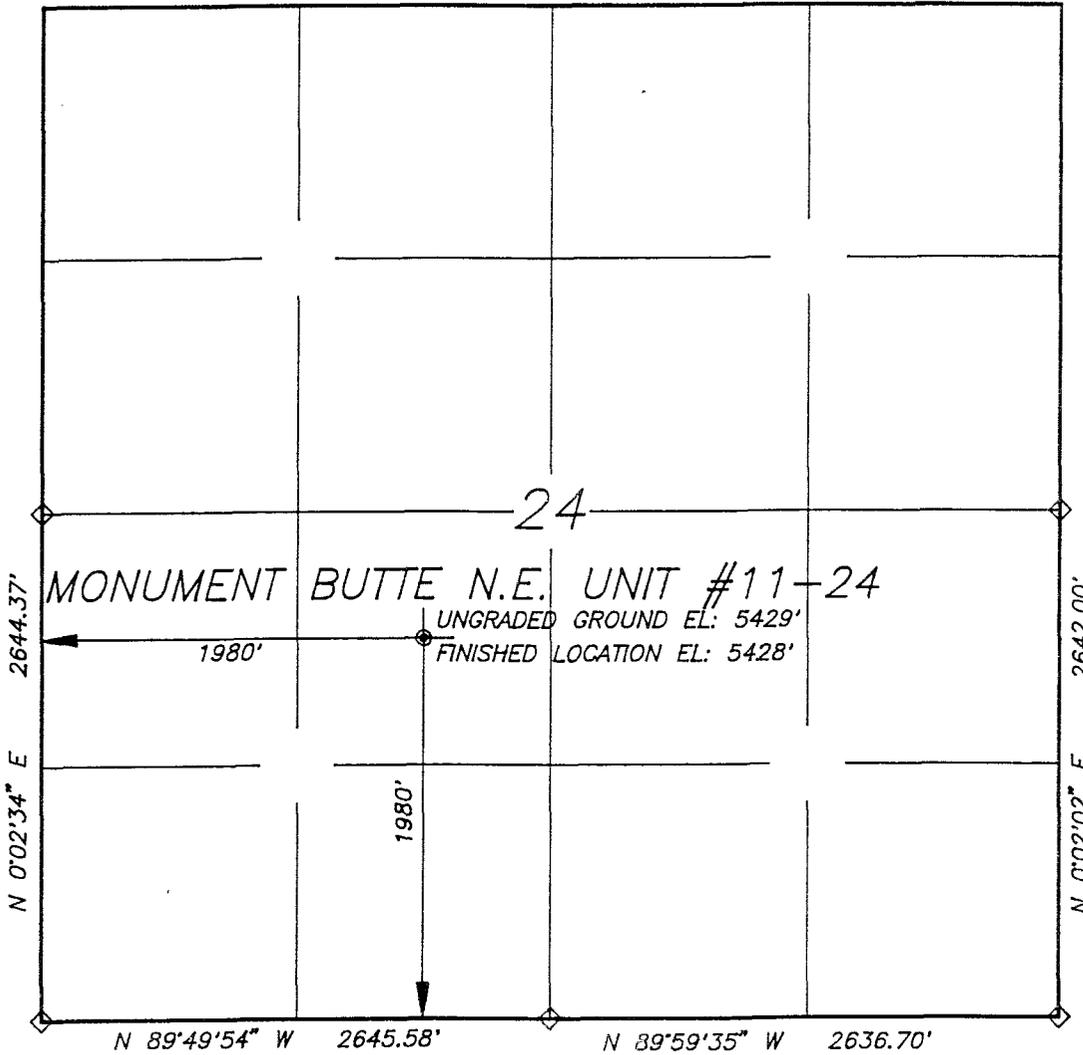


SCALE: 1" = 1000'

**LEGEND AND NOTES**

- ◇ ORIGINAL CORNER MONUMENTS FOUND AND USED BY THIS SURVEY.

THE GENERAL LAND OFFICE (G.L.O.) PLAT WAS USED FOR REFERENCE AND CALCULATIONS, AS WAS THE U.S.G.S. QUADRANGLE MAP.



**SURVEYOR'S CERTIFICATE**

I HEREBY CERTIFY THAT THIS PLAT WAS PREPARED FROM FIELD NOTES OF AN ACTUAL SURVEY PERFORMED BY ME, DURING WHICH THE SHOWN MONUMENTS WERE FOUND OR ESTABLISHED.

*Jerry D. Allred*  
 \_\_\_\_\_  
 JERRY D. ALLRED, REGISTERED LAND SURVEYOR,  
 CERTIFICATE NO. 148951 (UTAH)

	<b>JERRY D. ALLRED &amp; ASSOCIATES</b> SURVEYING CONSULTANTS
	121 NORTH CENTER STREET P.O. BOX 975 DUCHESNE, UTAH 84021 (801)-738-5352

18 MAR 1996

84-121-057

**MONUMENT BUTTE FEDERAL NORTHEAST #11-24  
NE/SW SECTION 24, T8S, R16E  
DUCHESNE COUNTY, UTAH  
U-67170**

**HAZARDOUS MATERIAL DECLARATION**

INLAND PRODUCTION COMPANY guarantees that during the drilling & completion of the above referenced well, we will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986.

INLAND PRODUCTION COMPANY guarantees that during the drilling and completion of the above referenced well, we will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

JOHNSON WATER DISTRICT  
R.R. 3 BOX 3188  
ROOSEVELT, UT 84066  
TELEPHONE (801) 722-2620


March 13, 1996

TO WHOM IT MAY CONCERN:

Inland Production Company has purchased a 3 inch water connection with Johnson Water District to supply Monument Butte oilfield.

Johnson Water District has given permission to Inland Production Company to use water from our system for the purpose of drilling and completing the Monument Butte North East 14-24, 11-24, 10-24, and 9-24.

Sincerely,



Karen Ashby.  
Secretary

**INLAND PRODUCTION COMPANY  
MONUMENT BUTTE FEDERAL NORTHEAST #11-24  
NE/SW SEC. 24, T8S, R16E  
DUCHESNE COUNTY, UTAH**

**TEN POINT WELL PROGRAM**

**1. GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

**2. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

Uinta	0' - 3030'
Green River	3030'
Wasatch	6500'

**3. ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:**

Green River Formation 3030' - 6400' - Oil

**4. PROPOSED CASING PROGRAM**

8 5/8", J-55, 24# w/ ST&C collars; set at 300' (New)  
5 1/2", J-55, 15.5# w/ LT&C collars; set at TD (New)

**5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:**

The operators minimum specifications for pressure control equipment are as follows:

A 8" Series 900 Hydril Bag type BOP and a 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOPS's will be checked daily.

(See Exhibit F)

**6. TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:**

It is proposed that the well be drilled with fresh water through the Uinta Formation. From the top of the Green River Formation @ 3000'  $\pm$  to TD, a fresh water/polymer system will be utilized. If necessary to control formation fluids, the system will be weighted with the addition of bentonite gel, and if conditions warrant, barite. Typically, this fresh water/polymer system will contain Total Dissolved Solids (TDS) of less than 3000 PPM. Neither potassium chloride or chromates will be utilized in the fluid system. The anticipated mud weight @ 8.4 ppg, weighted as necessary for gas control.

**7. AUXILIARY SAFETY EQUIPMENT TO BE USED:**

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. TESTING, LOGGING AND CORING PROGRAMS:

No drill stem testing has been scheduled for this well. It is anticipated at this time that the logging will consist of a Dual Induction Laterolog, Compensated Neutron-Formation Density Log. Logs will run from TD to 3500'. The cement bond log will be run from PBTD to cement top. The use of mud loggers to be determined at a later date.

9. ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:

The anticipated bottom hole pressure is 1800 psi. It is not anticipated that abnormal temperatures will be encountered; nor that any other abnormal hazards such as H<sub>2</sub>S will be encountered in this area.

10. ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:

It is anticipated that the drilling operations will commence in June, 1996 and take approximately eight days to drill.

**INLAND PRODUCTION COMPANY  
MONUMENT BUTTE FEDERAL NORTHEAST #11-24  
NE/SW SECTION 24, T8S, R16E  
DUCHESNE COUNTY, UTAH**

**THIRTEEN POINT WELL PROGRAM**

**1. EXISTING ROADS**

See attached Topographic Map "A"

To reach Inland Production Company well location site Monument Butte Federal North east #11-24 located in the NE 1/4 SW 1/4 Section 24, T8S, R16E, S.L.B. & M. Duchesne County, Utah:

Proceed westerly out of Myton, Utah along Highway 40 - 1.5 miles  $\pm$  to the junction of this highway and Utah State Highway 53; proceed southerly along Utah State Highway 53 - 7.4 miles to the junction with an existing dirt road to the southwest; proceed .2 miles to the beginning of the access road to be discussed in item #2.

The highways mentioned in the foregoing paragraph are bituminous surfaced roads to the point where Highway 216 exists to the South, thereafter the roads are constructed with existing materials and gravel. The highways are maintained by Utah State road crews. All other roads are maintained by County Crews.

The aforementioned dirt oilfield service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads required for access during the drilling, completion and production phase will be maintained at the standards required by the BLM or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal.

**2. PLANNED ACCESS ROAD**

See Topographic Map "B".

The planned access road leaves the existing location described in Item #1 in the NW1/4 SE1/4 Section 24, T8S, R16E, S.L.B. & M., and proceeds in a westerly direction approximately 1300' to the proposed location site.

The proposed access road will be an 18' crown road (9' either side of the centerline) with drainage ditches along either side of the proposed road whether it is determined necessary in order to handle any run-off from normal meteorological conditions that are prevalent to this area. The maximum grade will be less than 8%.

There will be no culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. LOCATION OF EXISTING WELLS

There are four (4) producing, Inland Production wells, and one (1) unknown P&A well, within a one (1) mile radius. See Exhibit "D".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery the well pad will be surrounded by a dike of sufficient capacity to contain at minimum the entire contents of the largest tank within the facility battery.

Tank batteries will be built to BLM specification.

All permanent (on site for six (6) months or longer) structures constructed or installed (including pumping units) will be painted Desert Tan. All facilities will be painted within six months of installation.

5. LOCATION AND TYPE OF WATER SUPPLY

At the present time, it is anticipated that the water for this well will be trucked from our pre-approved Inland Production Company water supply line located at the Gilsonite State #7-32 (SW/NE Sec. 32, T8S, R17E) location, as indicated on Topographic Map - Exhibit "C".

In the event this water source is not used an alternate source will be used and all the necessary arrangements will be made with the proper authorities.

There will be no water well drilled at this site.

6. SOURCE OF CONSTRUCTION MATERIALS

See Location Layout Sheet - Exhibit "E".

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. METHODS FOR HANDLING WASTE DISPOSAL

See Location Layout Sheet - Exhibit "E".

A small reserve pit will be constructed from native soil and clay materials. However, in a departure from conventional oilfield practice, the volume and duration of fluid occupying this pit will be minimal. By applying currently available technology, a water processing unit will be employed to continuously recycle the drilling fluid as it is used, returning the fluid component to the drilling rig's steel tanks. The reserve pit will primarily receive the processed drill cuttings (wet sand, shale & rock) removed from the wellbore. Any drilling fluids which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed by the water recycling unit and then returned to the steel rig tanks. Furthermore, all drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be utilized in the reserve pit.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

Immediately upon first production, all produced water will be confined in storage tanks. Inland requests temporary approval to transfer the produced water to Inland's nearby waterflood supply for reinjection into the waterflood reservoirs via existing approved injection wells. Within 90 days of first production, a water analysis will be submitted to the Authorized Officer, along with an application for approval of this as a permanent disposal method.

8. ANCILLARY FACILITIES

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. WELL SITE LAYOUT

See attached Location Layout Sheet - Exhibit "E".

The reserve pit will be located on the north side between stakes 4 & 5.

There will be no flare pit on this location.

The stockpiled topsoil (first six (6) inches) will be windrowed on the south side, between stakes 2 & 8.

Access to the well pad will be from the southeast corner between stakes 7 & 8.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- a) 39 inch net wire shall be used with at least one strand of barbed wire on top of the net.

MONUMENT BUTTE FEDERAL NORTHEAST #11-24

- a) 39 inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be not more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be cemented and/or braced in such a manner to keep tight at all times.
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

10. PLANS FOR RESTORATION OF SURFACE

a) *Producing Location*

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be re contoured to the approximated natural contours. The reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit will have all fluids and hydrocarbons removed.

When the drilling and completion phase ends, reclamation of unused disturbed areas on the well pad/access road no longer needed for operations, such as cut slopes, and fill areas will be accomplished by grading, leveling and seeding as recommended by the Authorized Officer. The seed mixture will be per B.L.M. and stated in the conditions of approval.

b) *Dry Hole Abandoned Location*

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the B.L.M. will attach the appropriate surface rehabilitation conditions of approval.

11. SURFACE OWNERSHIP - Bureau Of Land Management

12. OTHER ADDITIONAL INFORMATION

- a) Inland Production Company is responsible for informing all persons in the area who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, Inland is to immediately stop work that might further disturb such materials, and contact the Authorized Officer.
- b) Inland Production will control noxious weeds along rights-of-way for roads, pipelines, well sites, or other applicable facilities. On B.L.M. administered land it is required that a Pesticide Use Proposal shall be submitted, and given approval, prior to the application of herbicides or other possible hazardous chemicals.
- c) Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on Federal Lands after the conclusion of drilling operations or at any other time without B.L.M. authorization. However, if B.L.M. authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

The Archaeological Cultural Survey Report is attached.

*Additional Surface Stipulations*

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations. Onshore Oil and Gas Orders, the approved plan of operations, and any applicable Notice to Lessees. Inland Production is fully responsible for the actions of its subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Inland Production Company or a contractor employed by Inland Production shall contact the B.L.M. office at (801) 789-1362, 48 hours prior to construction activities.

The B.L.M. office shall be notified upon site completion prior to moving on the drilling rig.

13. LESSEE'S OR OPERATORS REPRESENTATIVE AND CERTIFICATION

Representative

Name: Brad Mecham  
Address: P.O. Box 1446 Roosevelt, Utah 84066  
Telephone: (801) 722-5103

Certification

Please be advised that INLAND PRODUCTION COMPANY is considered to be the operator of Well #11-24 NE/SW Section 24, Township 8S, Range 16E: Lease #U-67170 ; Duchesne County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by Hartford Accident #4488944.


I hereby certify that I, or persons under my direct supervision have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Inland Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

3-28-96

Date


Brad Mecham

Brad Mecham  
Operations Manager

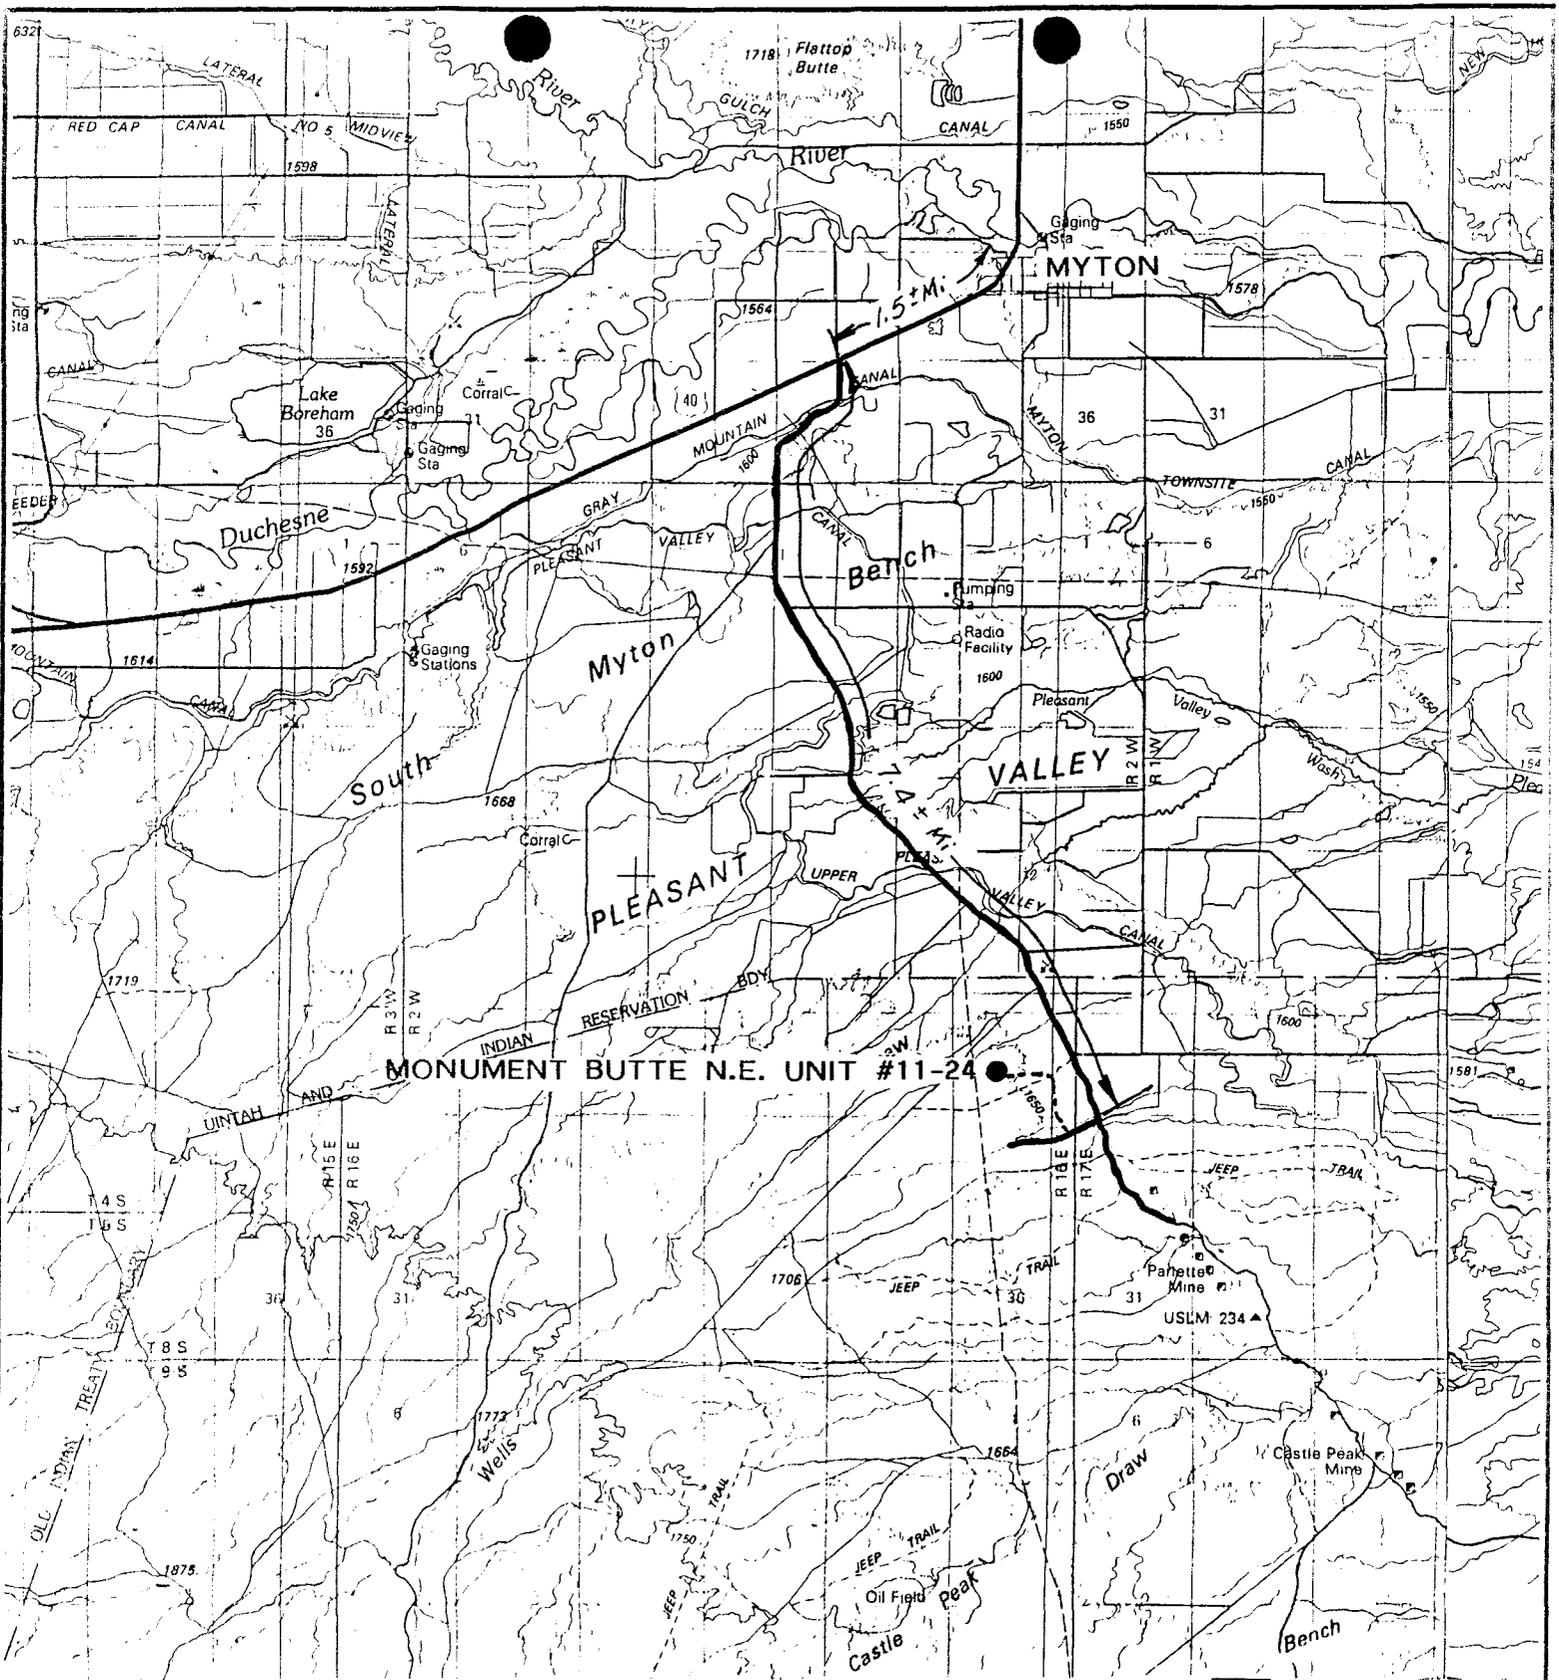

MONUMENT BUTTE N.E. UNIT #11-24

TOPOGRAPHIC  
MAP "A"




**INLAND PRODUCTION COMPANY**


MONUMENT BUTTE N.E. UNIT #11-24  
SECTION 24, T8S, R16E, S.L.B.&M.

20 Mar '96

84-121-057

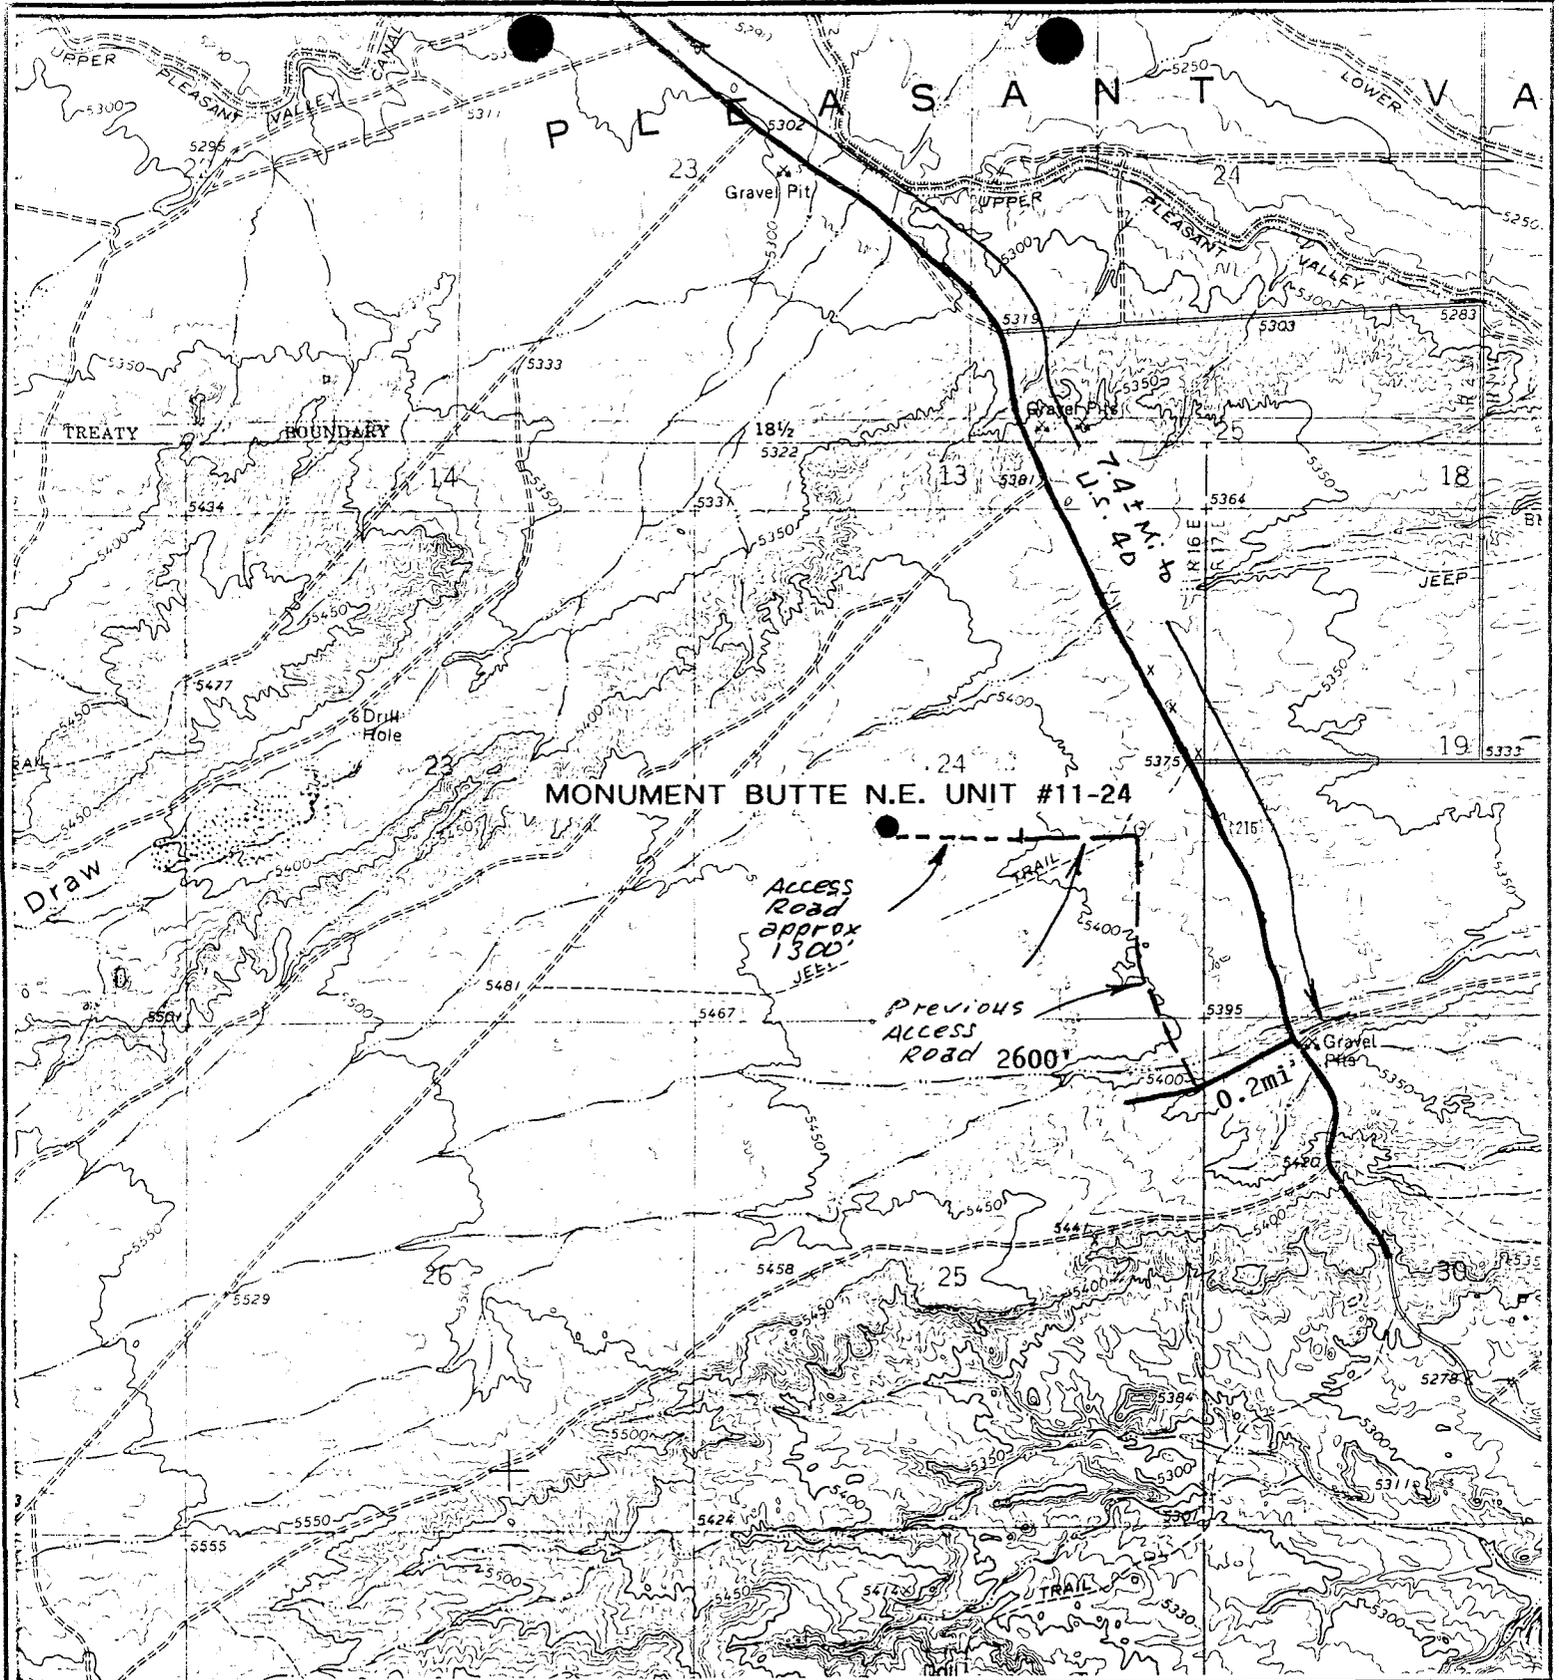

TOPOGRAPHIC  
 MAP "B"  
 SCALE: 1" = 2000'



**INLAND PRODUCTION COMPANY**

MONUMENT BUTTE N.E. UNIT #11-24  
 SECTION 24, T8S, R16E, S.L.B.&M.

20 Mar '96 84-121-057

R 2 W. MYTON 616 MI 2'30" R 1 W '82 2410000 FEET '83 '84 '85 110°00' 40'

# EXHIBIT C


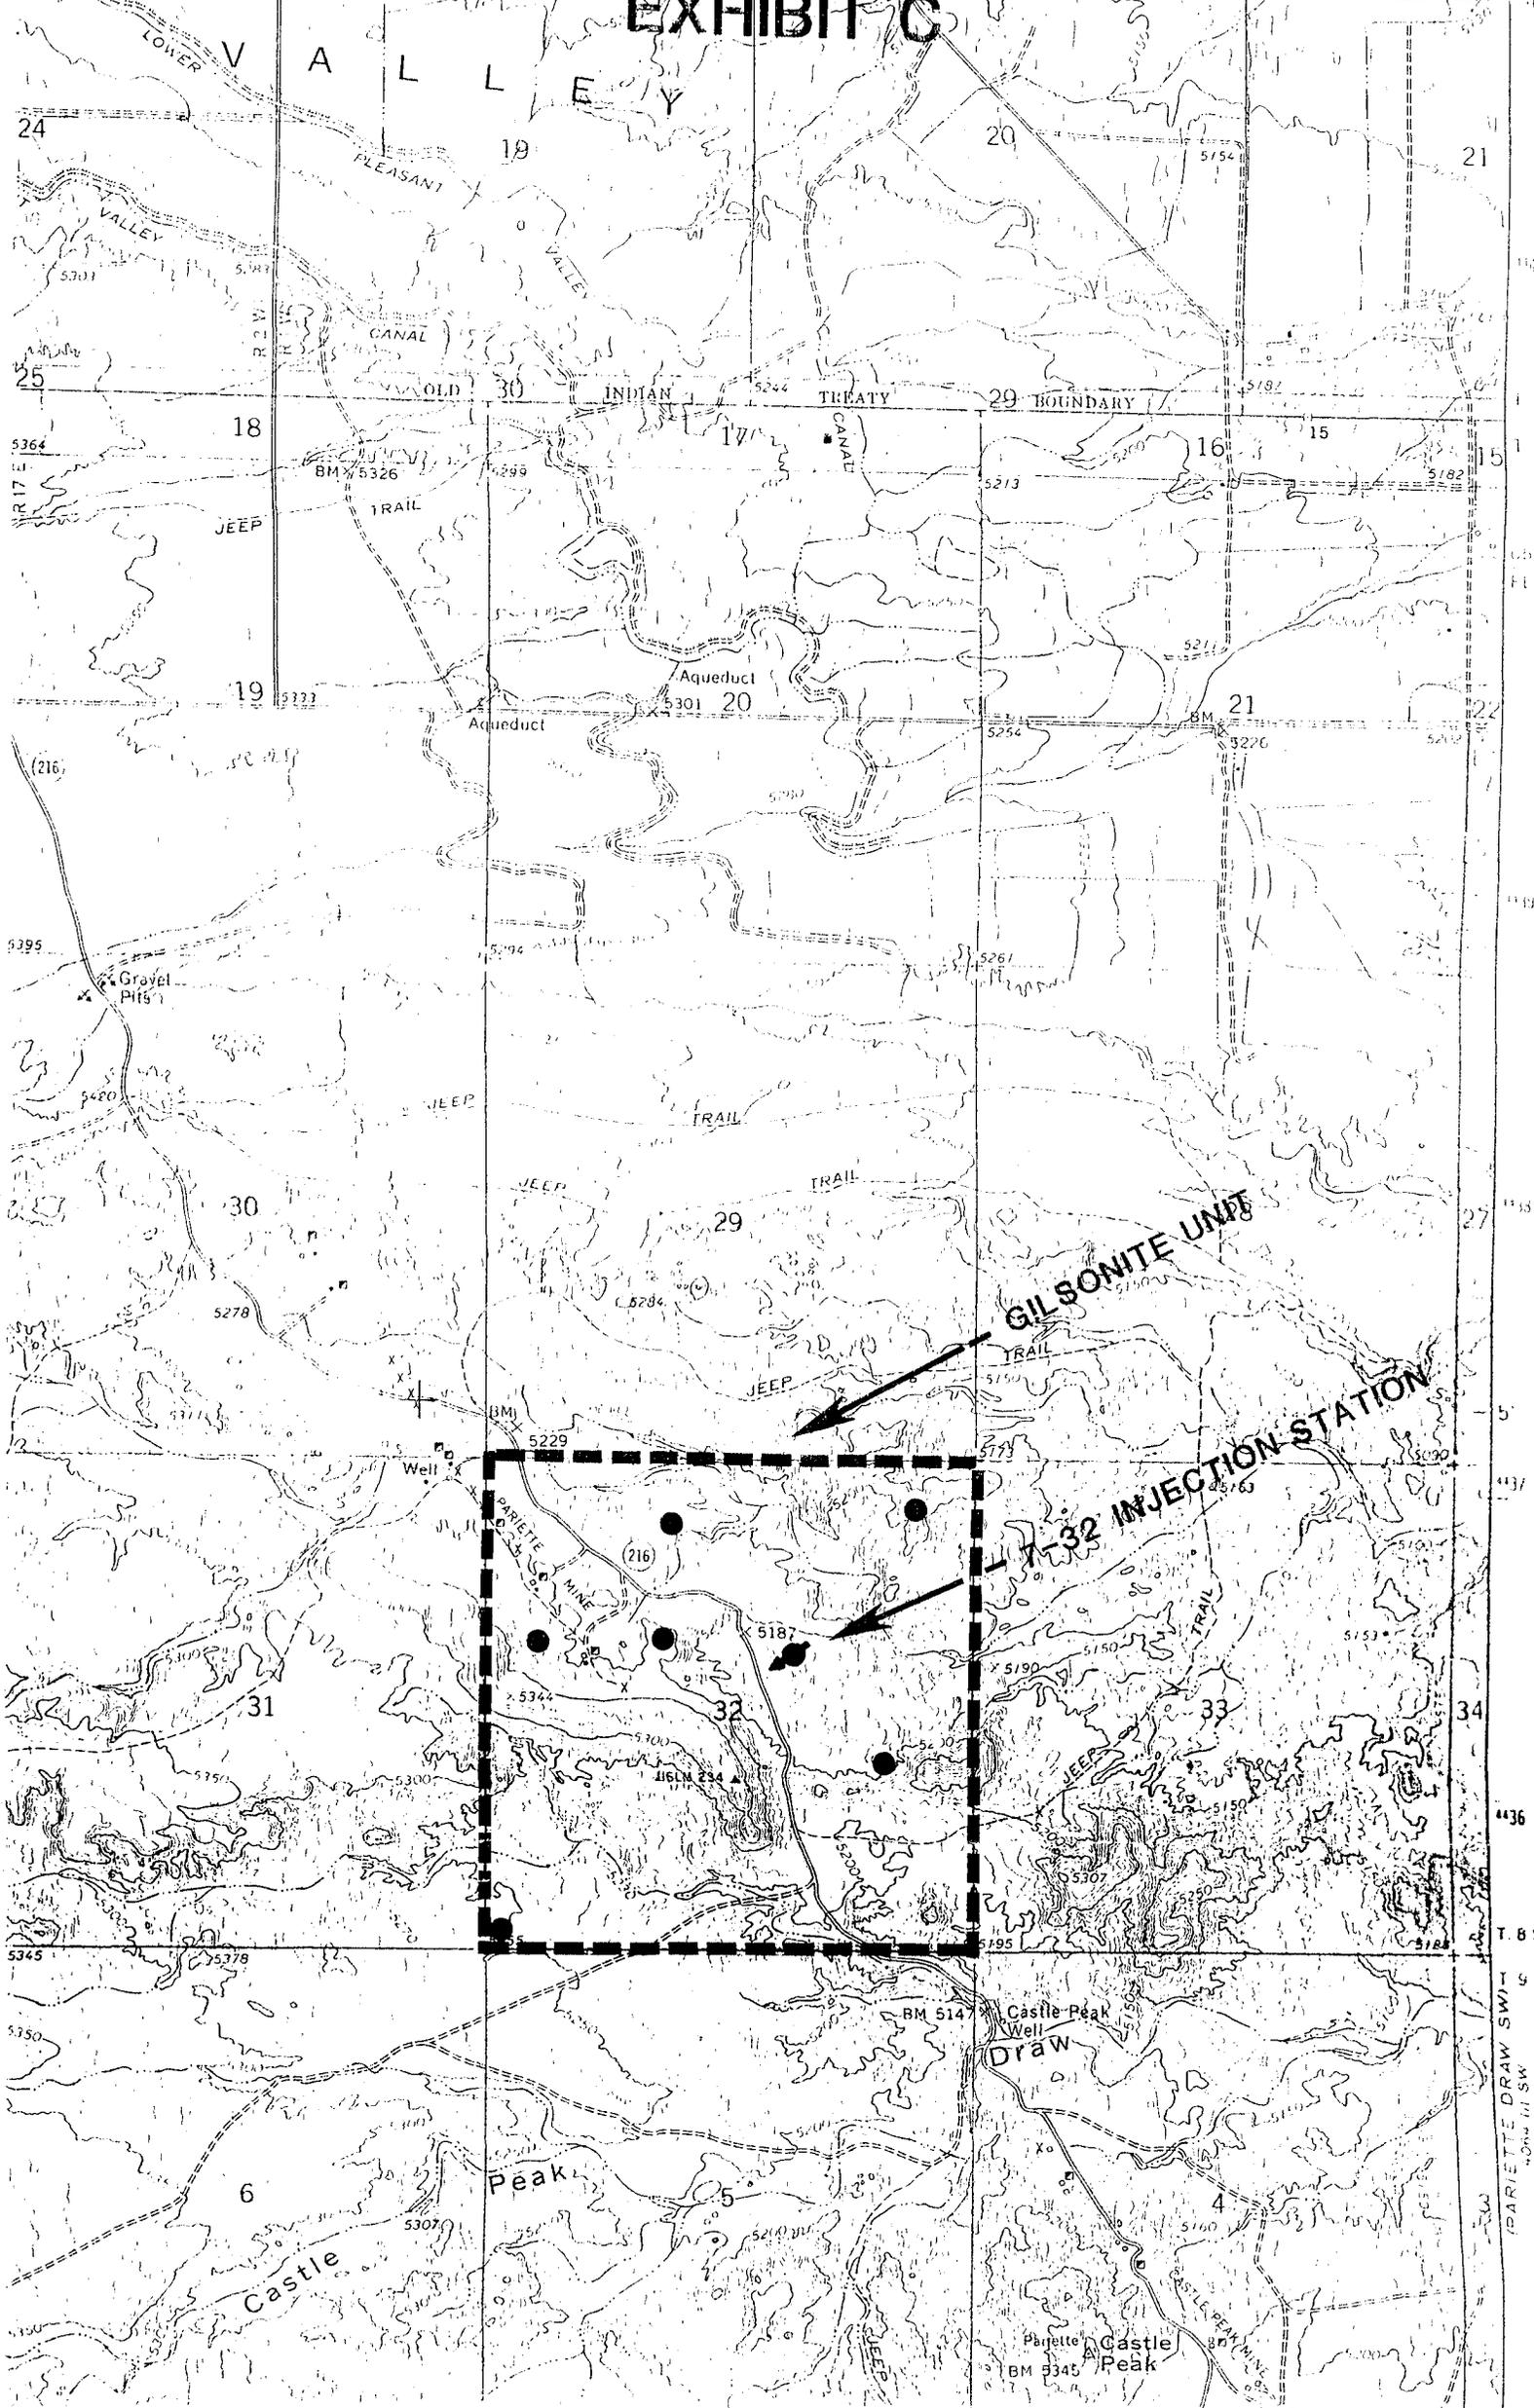



EXHIBIT "D"

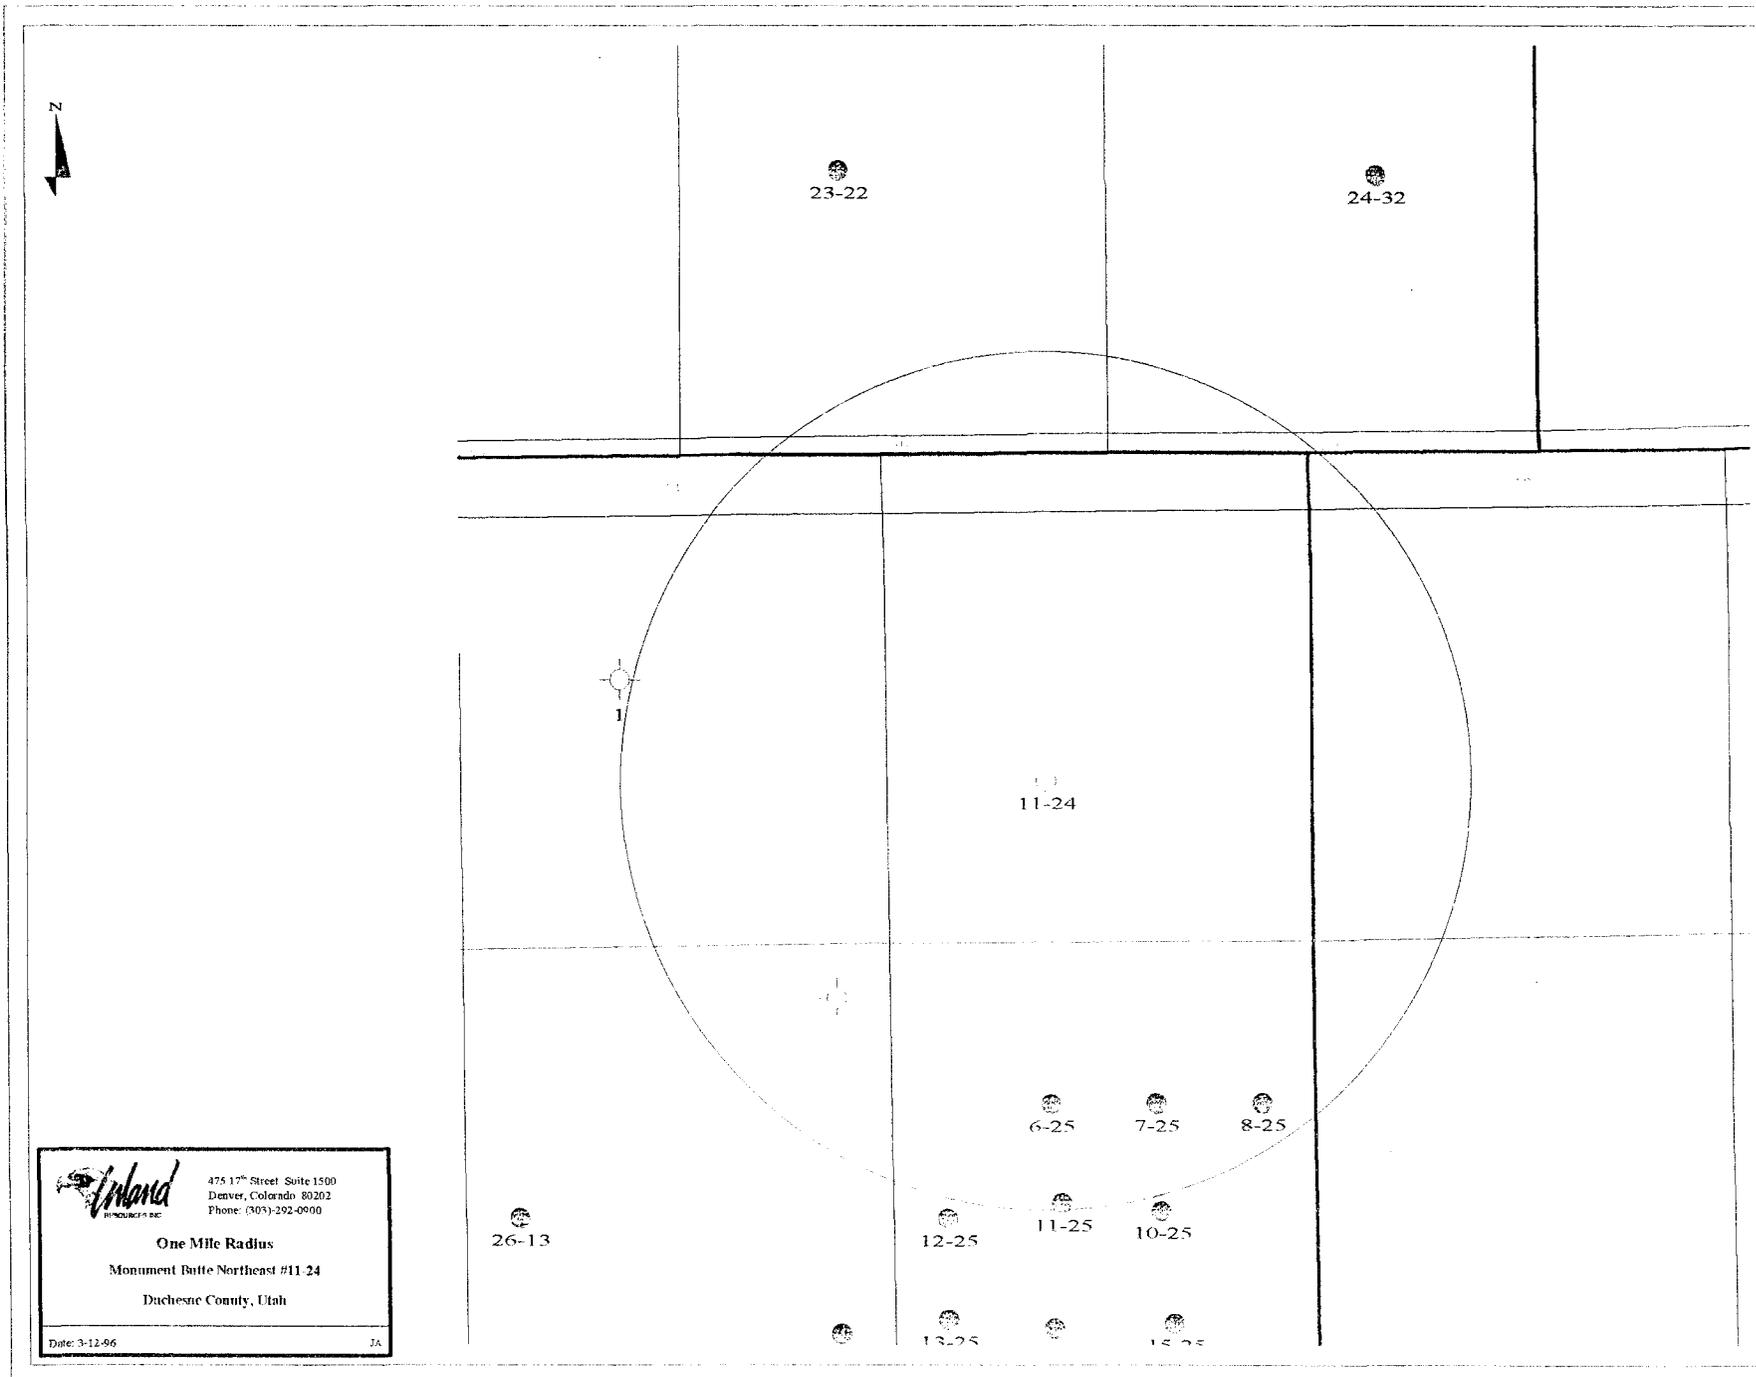

# INLAND PRODUCTION CO. WELL LAYOUT PLAT MONUMENT BUTTE N.E. UNIT #11-24




LOCATED IN THE NE1/4 OF THE SW1/4 OF SECTION 24,  
TOWNSHIP 8 SOUTH, RANGE 16 EAST, S.L.B.&M.

STA. 2+25

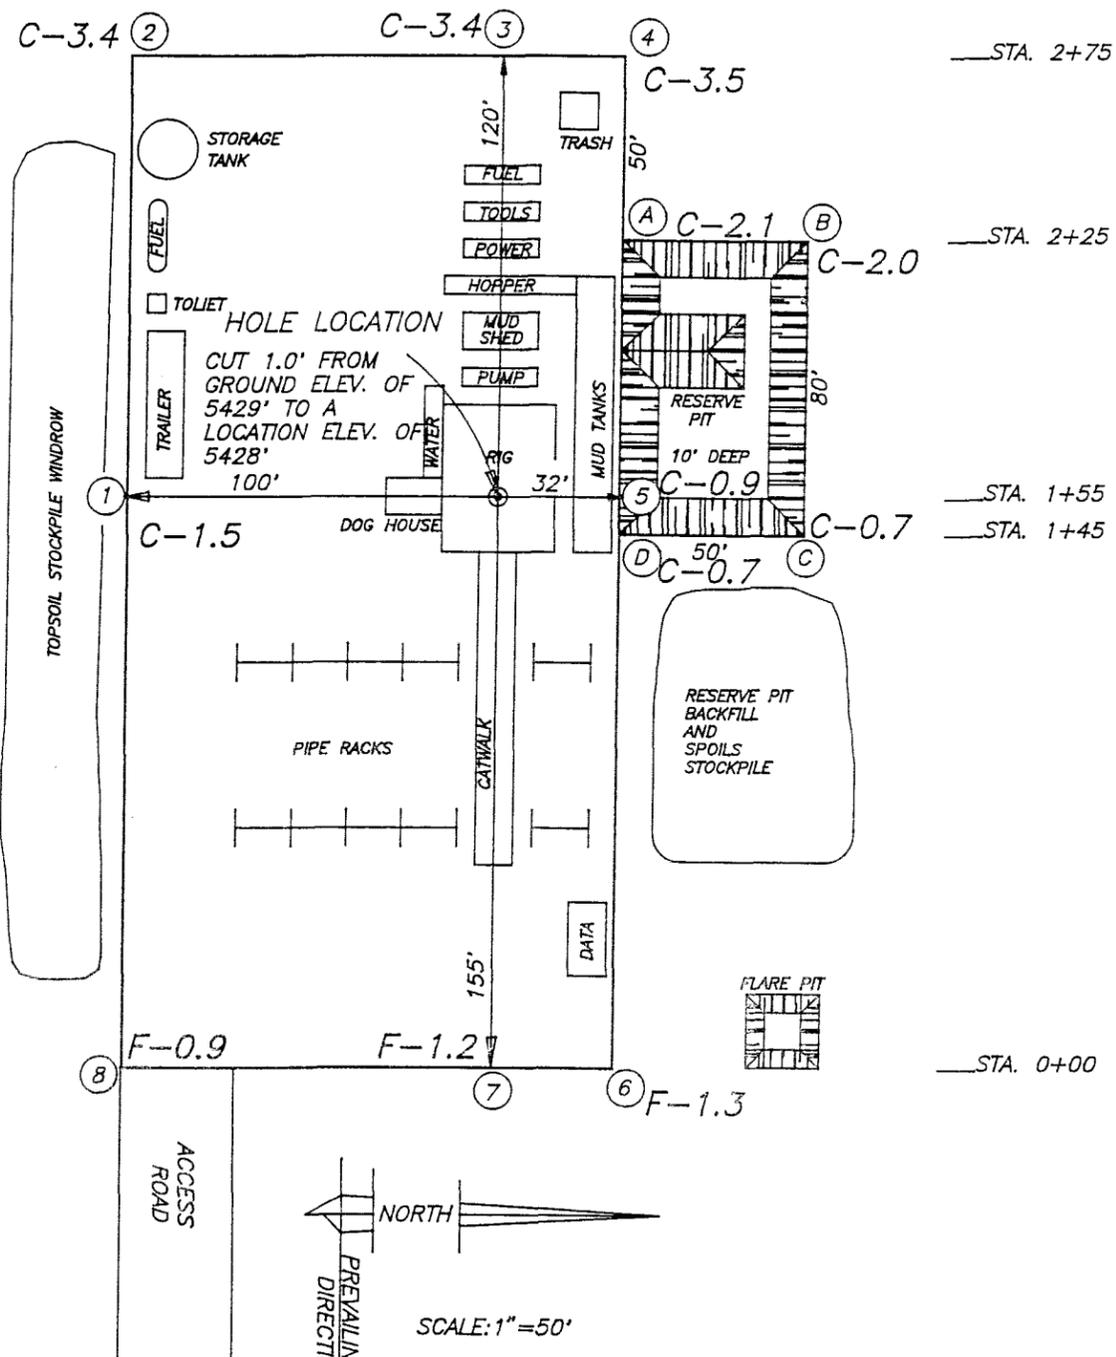

APPROXIMATE QUANTITIES

CUT: 3100 CU. YDS. (INCLUDES PIT)  
FILL: 500 CU. YDS.

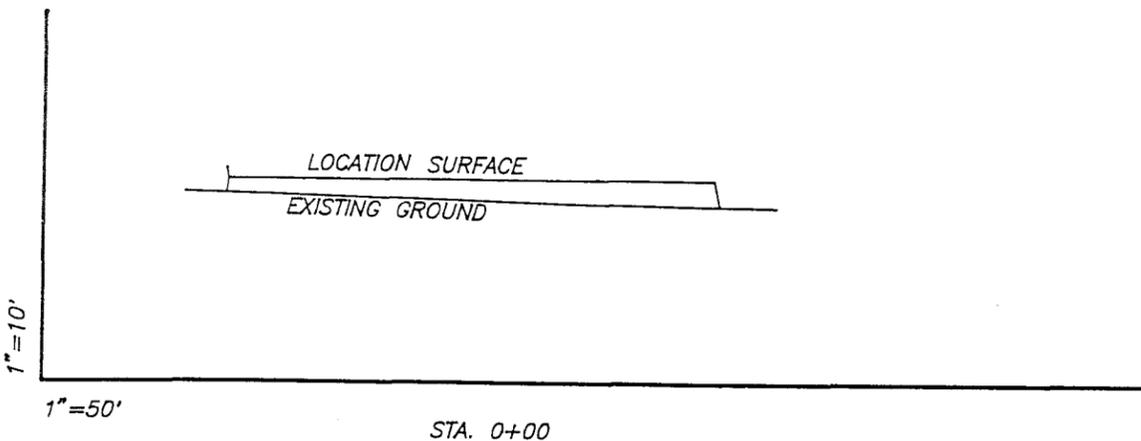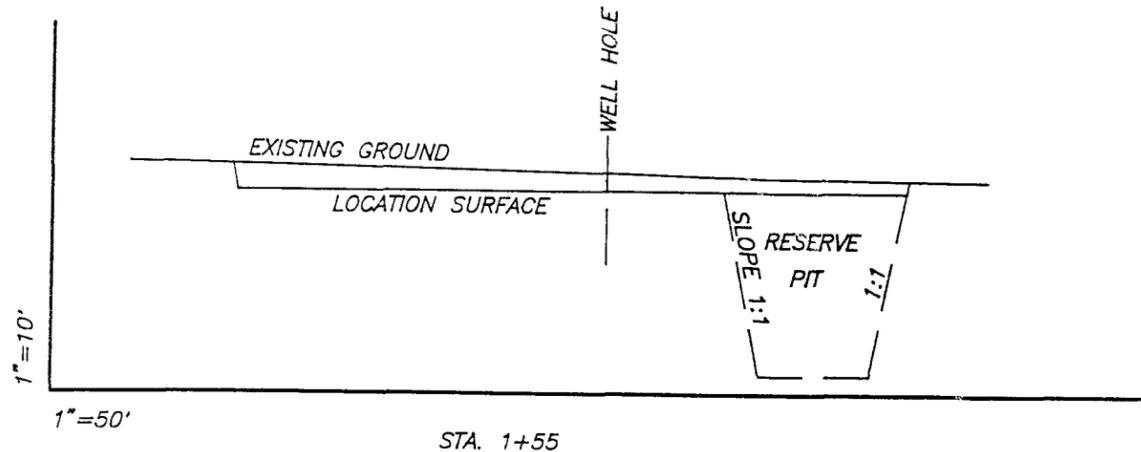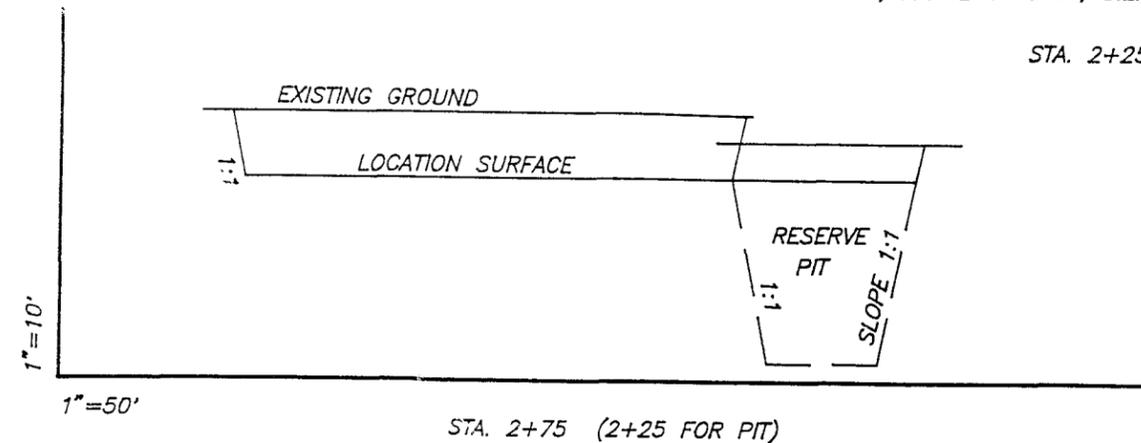

	<b>JERRY D. ALLRED AND ASSOCIATES</b> Surveying and Engineering Consultants
	121 NORTH CENTER STREET P.O. BOX 975 DUCHESNE, UTAH 84021 (801) 738-5352

RAM TYPE B.O.P.



Make:

Size:

Model:

# 2-M SYSTEM

EXHIBIT F

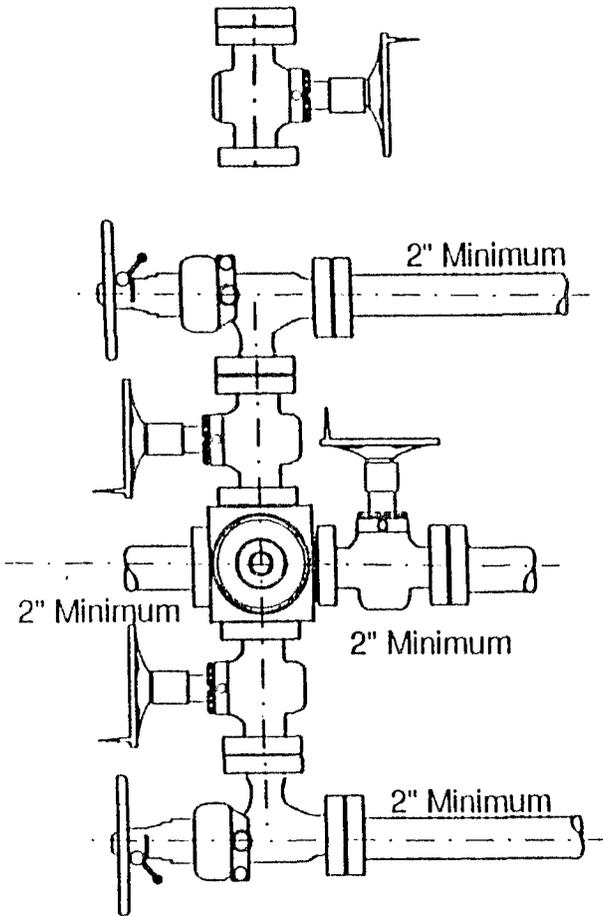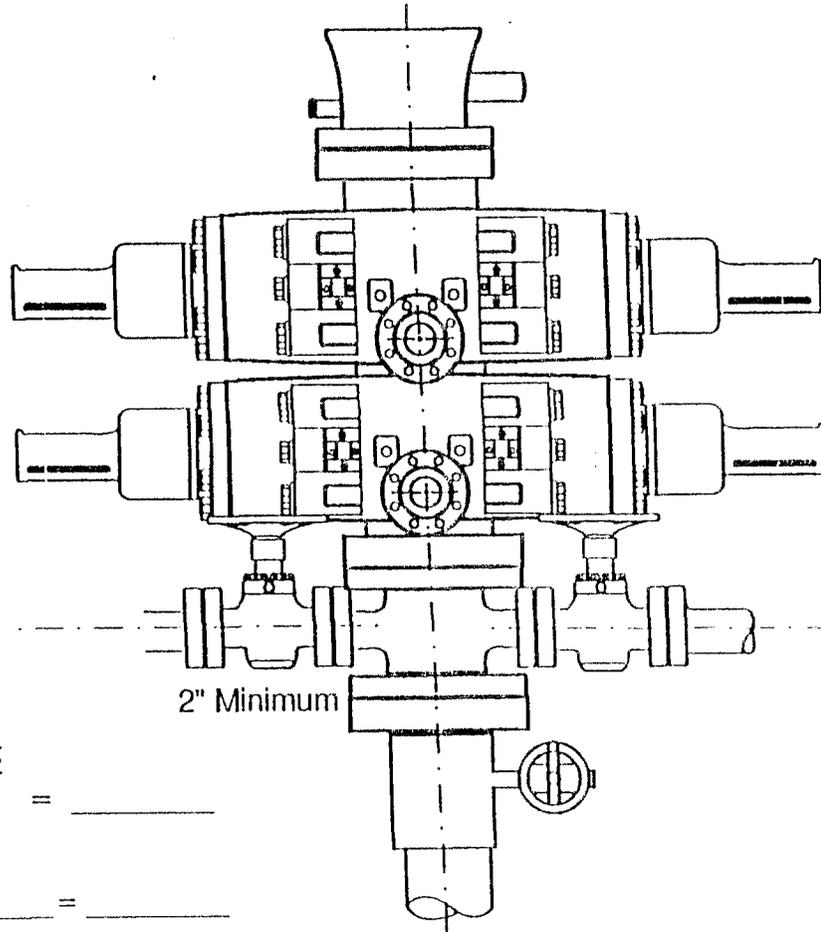

GAL TO CLOSE  
 Annular BOP = \_\_\_\_\_  
 Ramtype BOP  
 \_\_\_\_\_ Rams x \_\_\_\_\_ = \_\_\_\_\_  
 = \_\_\_\_\_ Gal.  
 \_\_\_\_\_ x 2 = \_\_\_\_\_ Total Gal.

rounding off to the next higher  
 increment of 10 gal. would require  
 \_\_\_\_\_ Gal. (total fluid & nitro volume)

A CULTURAL RESOURCES SURVEY OF  
MONUMENT BUTTE NE FEDERAL WELLS #9-24, #10-24, #11-24, AND #14-24 ,  
DUCHESNE COUNTY, UTAH

by

Sheri Murray Ellis  
Archaeologist

Prepared for:

Inland Production Company  
P.O. Box 1446  
Roosevelt, Utah 84066

Prepared by:

Sagebrush Archaeological Consultants, L.L.C.  
3670 Quincy Avenue, Suite 203  
Ogden, Utah 84403

Under Authority of Cultural Resources Use Permit No. 95UT54630

and

Under Authority of Utah State Antiquities Permit No. U-96-SJ-0134b

Archaeological Report No. 858-01

March 26, 1996

## INTRODUCTION

In February 1996, Inland Production Company (Inland) of Roosevelt, Utah requested that Sagebrush Archaeological Consultants, L.L.C. (Sagebrush) conduct a cultural resources inventory of Inland's Monument Butte Federal wells #9-24 (1980' FSL 660' FEL), #10-24 (1980' FSL 1980' FEL), #11-24 (1980' FSL 1980' FWL), and #14-24 (660' FSL 1980' FWL) located on lands controlled by the Bureau of Land Management (BLM) in Duchesne County, Utah (Figure 1).

The proposed wells are located in T. 8S., R. 16E., S. 24 on USGS 7.5' Quadrangle Myton SE, Utah (1964). The project was carried out by Sheri Murray Ellis on March 14 and 15, 1996 under authority of Cultural Resources Use Permit No. 95UT54630 and Utah State Antiquities Permit No. U-96-SJ-0134b.

A file search for previously recorded cultural resource sites and paleontological localities located near the current project area was conducted by Heather M. Weymouth and Lynita S. Langley on February 23, 1996 at the BLM, Vernal District Office. This file search was carried out during the course of research for a recent survey of wells #15-24 and #16-24 (Weymouth 1996). An additional file search was conducted by Michael R. Polk at the Division of State History, Utah State Historic Preservation Office, Salt Lake City on February 21, 1996.

More than 30 previous cultural resources projects have been conducted in the area of the current project. Due to the large number of projects conducted in this area, individual project descriptions will not be listed. However, five cultural resources sites and three paleontological localities are listed as being located near the current project area. Following is a brief description of these sites and localities:

### Cultural Resource Sites

**Site 42Dc557.** This site, located in a wide drainage at the base of a rock face, is a small historic trash scatter. This site was recommended NOT eligible to the National Register of Historic Places (NRHP).

**Site 42Dc854.** This site is a large prehistoric campsite located in a dunal area. This site consists primarily of a large (500-plus flakes) lithic scatter. Primary flakes are dominant with secondary common, tertiary flakes, shatter and cores present, but rare. Fire-cracked rock (FCR) was scattered through the site in eroded areas. No particular FCR configurations were noted possibly due to the deflated nature of portions of the site. Seven crude bifaces and two possible groundstone fragments (one a possible mano fragment) were also located at this site. This site was recommended ELIGIBLE to the NRHP.

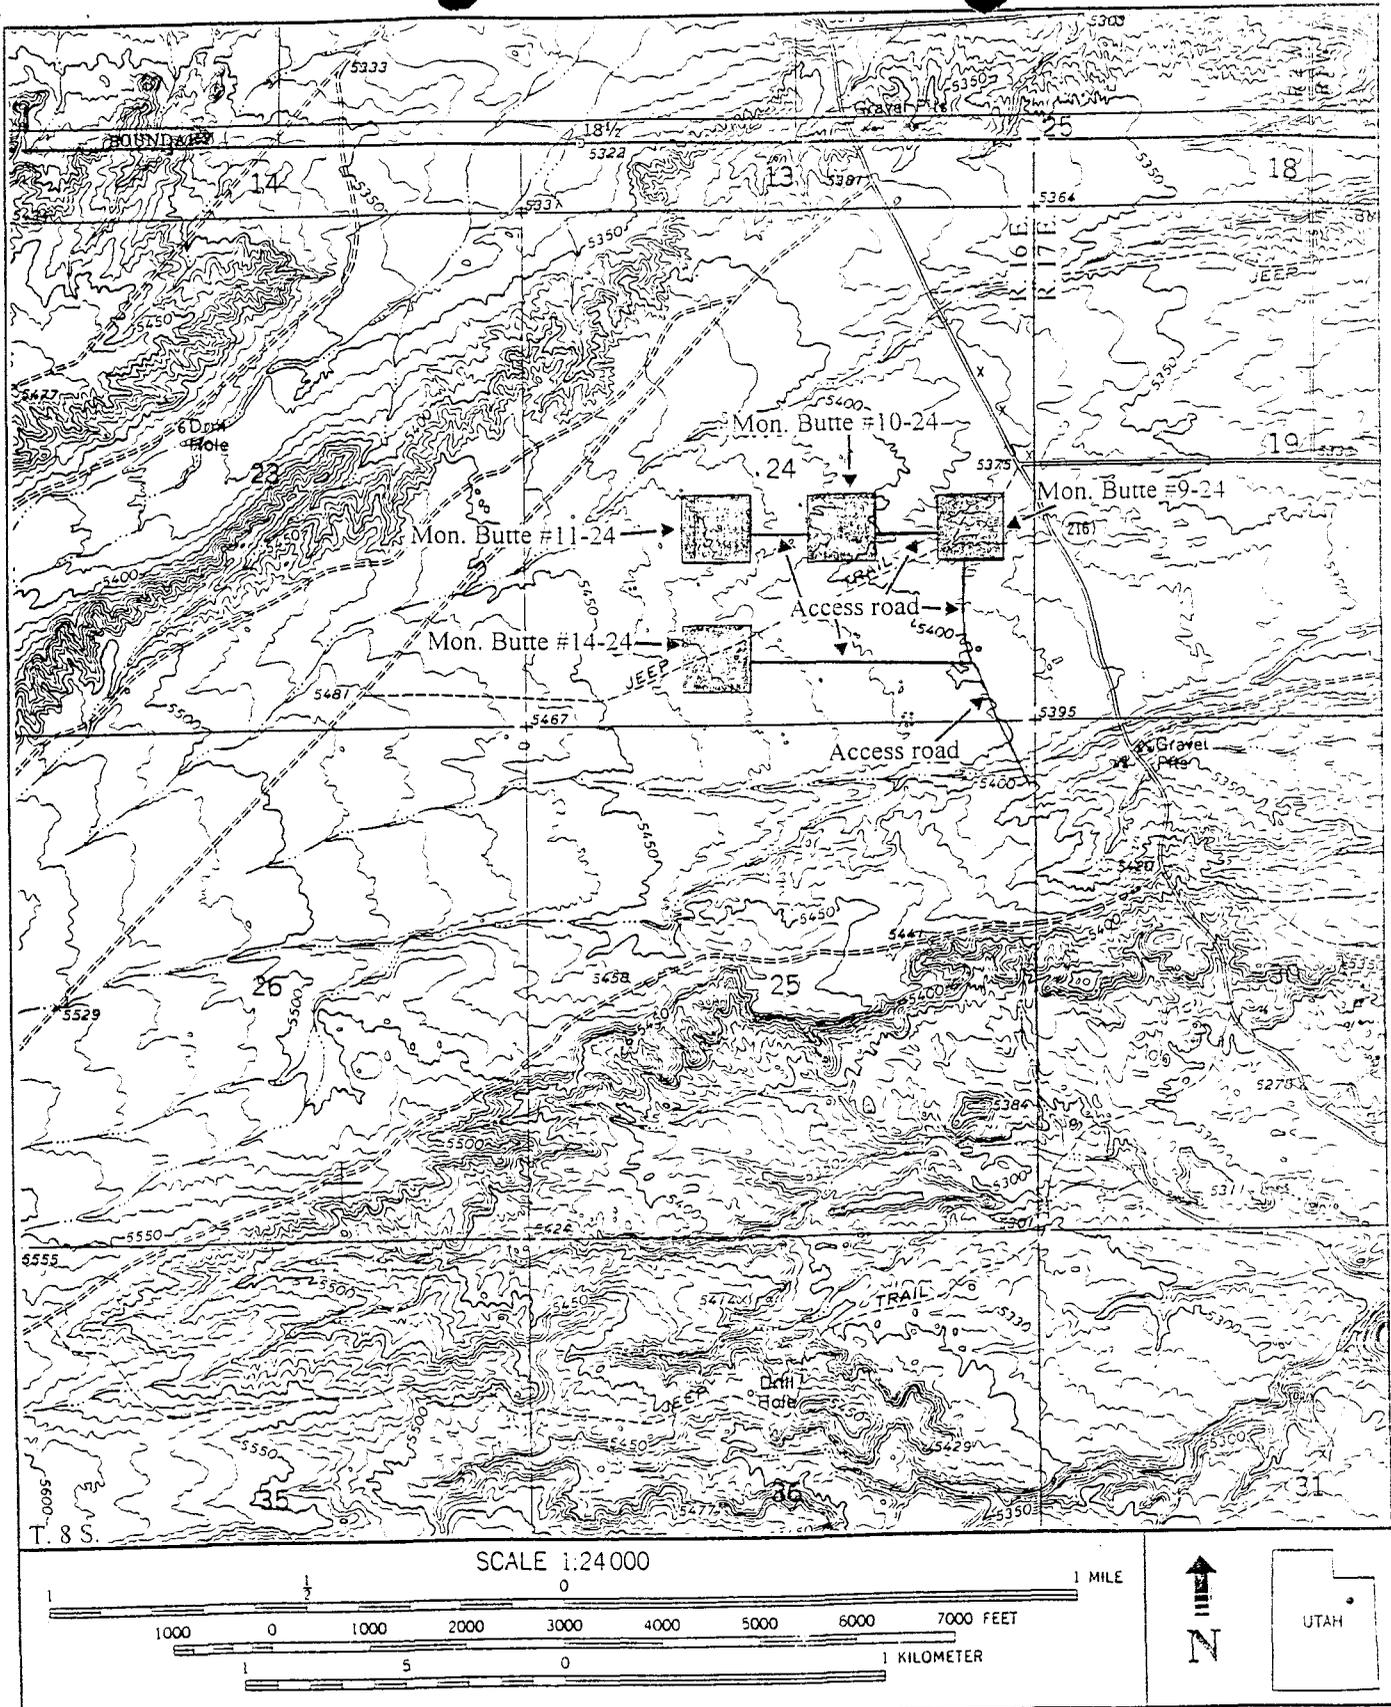


Figure 1. Location of Monument Butte Federal Wells #9-24, #10-24, #11-24, and #14-24, and their associated access roads. Taken from: USGS 7.5' Quadrangle Myton SE, Utah (1964).

**Site 42Dc908.** This site consists of a large lithic scatter and is located on a gently sloping bench above a large drainage and below a small knoll. Tools located at the site include sixteen bifacially worked tools and two cores. No diagnostic tools or features were noted. This site was recommended ELIGIBLE to the NRHP.

**Site 42Dc909.** This site, located on a sandy bluff flanked by three drainages, consists of a large and sparse lithic scatter. Artifacts noted include approximately 150 lithic flakes, three bifaces and a drill. No features and no diagnostic tools were noted. This site was recommended ELIGIBLE to the NRHP.

**Site 42Dc937.** This site, located at the terminus of a gravel-covered sand bar between two ephemeral stream channels, is a sparse lithic scatter of low grade chert. No diagnostic artifacts nor features are present at the site. This site was recommended NOT eligible to the NRHP.

### **Paleontological Localities**

**Locality 42Dc103p.** This locality, situated in the NW $\frac{1}{4}$ SE $\frac{1}{4}$  of Sec. 25, consists of plant specimens and a possible fish tail fossil found in an outcropping of sandstone in the Uinta Formation. This locality is considered IMPORTANT.

**Locality 42Dc224v.** This locality consists of several fossilized turtle shells eroding out of the portion of Uinta Formation exposed along the south side of well pad #15-36. Fragments of what appear to be "a small fossil lizard jaw". This locality is considered SIGNIFICANT.

**Locality 42Dc225v.** This locality consists of fragmented pieces of turtle shell scattered about the southwest portion of well #10-36. This material may have been transported by water action to this location from the outcrop immediately to the south. Additionally, a number of turtle shell fragments were found around the hill northeast of the well pad. This locality is considered IMPORTANT.

In addition to these searches, the NRHP was consulted prior to conducting the survey. No NRHP listed or determined eligible sites were found to be in the vicinity of the current project area.

### **ENVIRONMENT**

The project area lies in dissected tablelands south of Pleasant Valley. The elevation of the project area ranges from approximately 5400 to 5410 feet a.s.l. Sediments consist of tan to light brown sandy loam with angular fragments of sandstone and limestone visible on the surface. Vegetation in the survey area consists of shadscale community species. Noted species include

winterfat, cheat grass, four-wing salt brush, shadscale, sagebrush, prickly pear cactus, buckwheat, and bunch grass. There are no permanent water sources in the immediate project area. However, many seasonally flowing drainages and washes are present in the general vicinity. These seasonal water sources were likely the primary sources of water in this area historically. Natural disturbance in the area is primarily in the form of aeolian movement of sand and some water erosion. Cultural disturbance includes grazing, pre-existing well pad locations and a number of access roads leading to the well locations.

## METHODOLOGY

The project area consists of four 40,469 m<sup>2</sup> (10 acre) parcels of land measuring 201-by-201 m (660-by-660 ft) centered on the proposed well heads and of access roads connecting the well locations to existing roadways. The well pads were inventoried by the author walking parallel transects spaced no more than 15 m (50 ft) apart. The access roads, which totaled 22,860 m (7500 ft) in length, were walked in two parallel transects spaced 10 m (32 ft) apart to cover a corridor width of 30 m (100 ft). The area surveyed during this project (including well pads and access roads) totaled 231,488 m<sup>2</sup> (57.2 acres).

## RESULTS

No cultural resources sites or paleontological localities were found during the inventory of the four well pads and their associated access roads.

## RECOMMENDATIONS

Since there were no cultural resources or paleontological materials found during this inventory, cultural and paleontological clearance is recommended for the proposed project.

This investigation was conducted with techniques which are considered to be adequate for evaluating cultural and paleontological resources which could be adversely affected by the project. However, should such resources be discovered during construction, a report should be made immediately to the BLM District Archaeologist, Vernal District Office, Vernal, Utah.

## REFERENCES CITED

Weymouth, Heather M.

1996 *A Cultural Resources Survey of Monument Butte Ne Federal Wells #15-24 and #16-24, Duchesne County, Utah.* Sagebrush Archaeological Consultants, L.L.C., Archaeological Report No. 852, Ogden, Utah.

WORKSHEET  
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 04/01/96

API NO. ASSIGNED: 43-013-31633

WELL NAME: MONUMENT BUTTE FED NE 11-24  
 OPERATOR: INLAND PRODUCTION COMPANY (N5160)

PROPOSED LOCATION:  
 NESW 24 - T08S - R16E  
 SURFACE: 1980-FSL-1980-FWL  
 BOTTOM: 1980-FSL-1980-FWL  
 DUCHESNE COUNTY  
 UNDESIGNATED FIELD (002)

INSPECT LOCATION BY: / /		
TECH REVIEW	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: FED  
 LEASE NUMBER: U - 67170

PROPOSED PRODUCING FORMATION: GRRV

RECEIVED AND/OR REVIEWED:

- Plat
- Bond: Federal  State  Fee   
 (Number 4488944)
- Potash (Y/N)
- Oil shale (Y/N)
- Water permit  
 (Number GILSONITE STATE 7-32)
- RDCC Review (Y/N)  
 (Date: \_\_\_\_\_)

LOCATION AND SITING:

- \_\_\_ R649-2-3. Unit: \_\_\_\_\_
- R649-3-2. General.
- \_\_\_ R649-3-3. Exception.
- \_\_\_ Drilling Unit.  
 Board Cause no: \_\_\_\_\_  
 Date: \_\_\_\_\_

COMMENTS: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

STIPULATIONS: \_\_\_\_\_


\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

# INLAND PRODUCTION DEVELOPMENT DRILLING SEC. 24, T8S, R16E & SEC. 30, T8S, R17E DUCHESNE, COUNTY R649-3-2

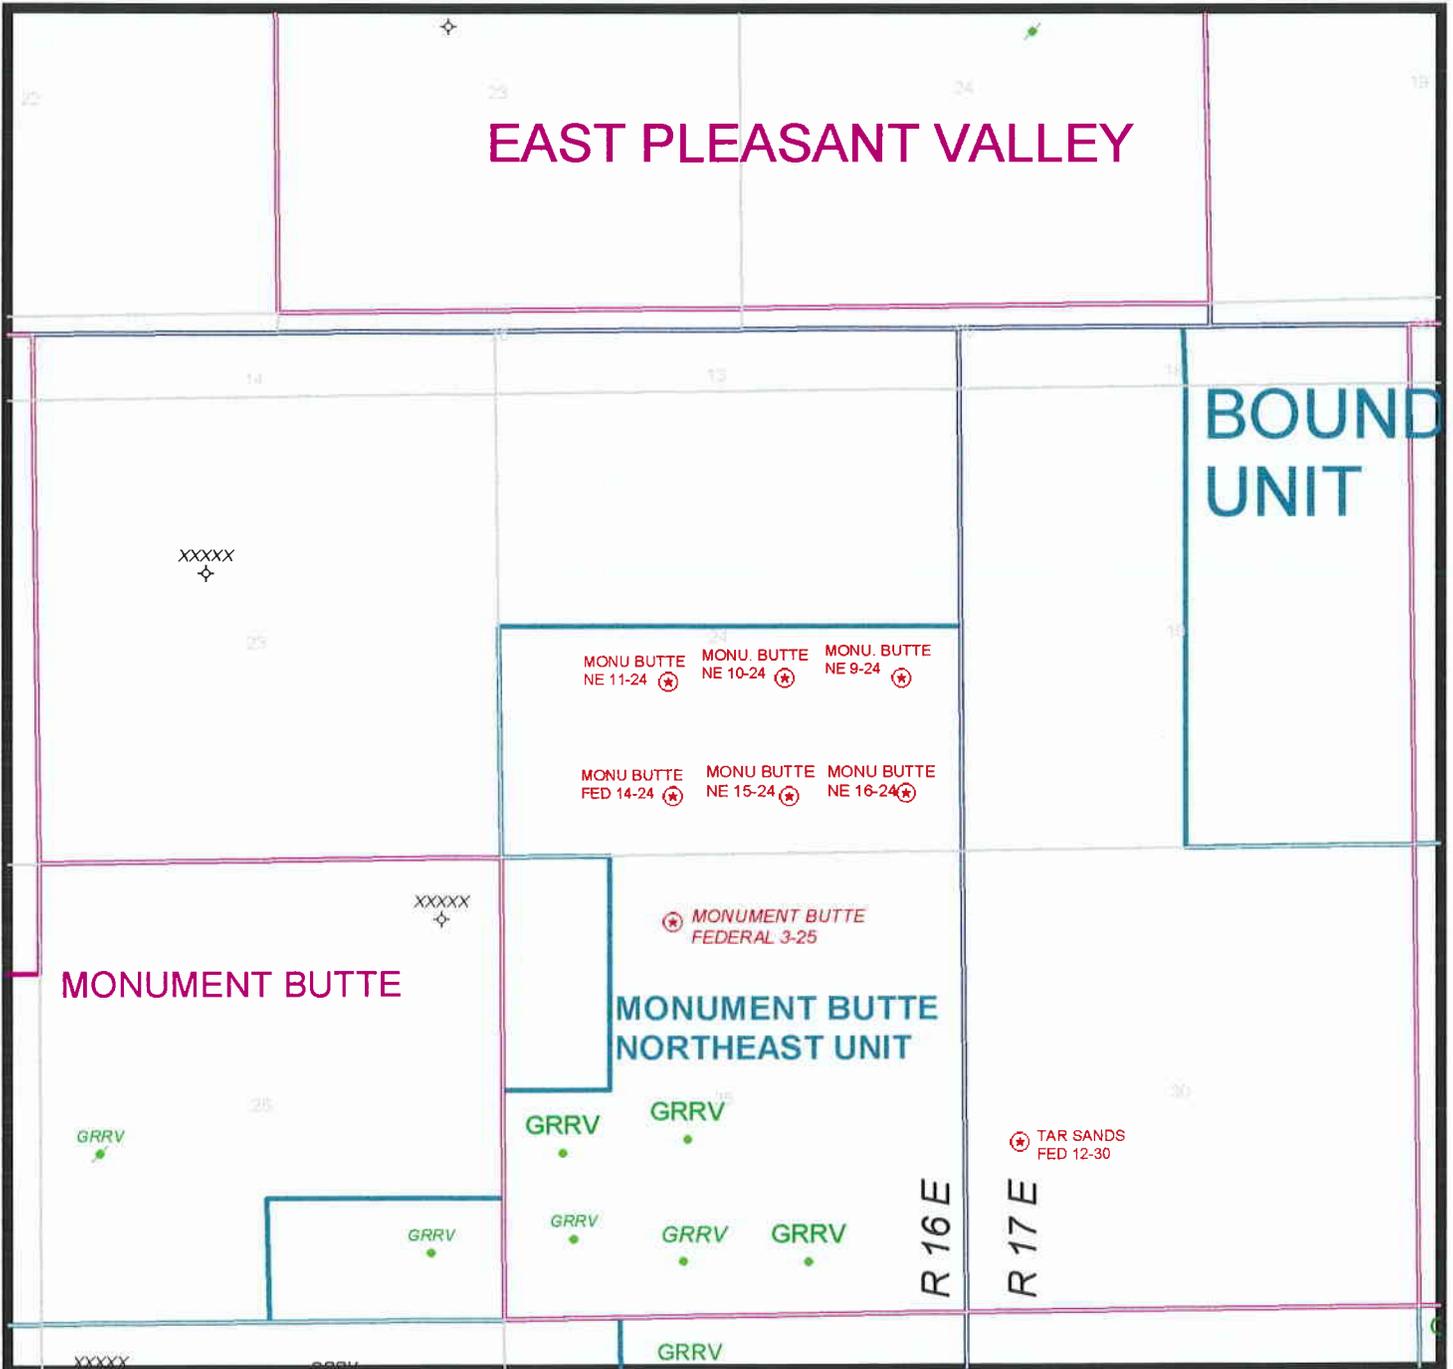

**PREPARED:**  
**DATE: 3-APR-96**

STATE OF UTAH, DIV OF OIL, GAS & MINERALS

Operator: INLAND PRODUCTION CO	Well Name: MON BUTTE FED NE 11-
Project ID: 43-013-31633	Location: SEC. 24 - T08S - R16E

Design Parameters:

Mud weight ( 8.40 ppg) : 0.436 psi/ft  
 Shut in surface pressure : 2396 psi  
 Internal gradient (burst) : 0.068 psi/ft  
 Annular gradient (burst) : 0.000 psi/ft  
 Tensile load is determined using air weight  
 Service rating is "Sweet"

Design Factors:

Collapse : 1.125  
 Burst : 1.00  
 8 Round : 1.80 (J)  
 Buttress : 1.60 (J)  
 Other : 1.50 (J)  
 Body Yield : 1.50 (B)

Length (feet)	Size (in.)	Weight (lb/ft)	Grade	Joint	Depth (feet)	Drift (in.)	Cost		
1	6,500	5.500	15.50	J-55	LT&C	6,500	4.825		
	Collapse Load (psi)	Strgth (psi)	S.F.	Burst Load (psi)	Min Int Strgth (psi)	Yield S.F.	Tension Load (kips)	Strgth (kips)	S.F.
1	2836	4040	1.425	2836	4810	1.70	100.75	217	2.15 J

Prepared by : MATTHEWS, Salt Lake City, Utah  
 Date : 06-25-1996  
 Remarks :

Minimum segment length for the 6,500 foot well is 1,500 feet.  
 SICP is based on the ideal gas law, a gas gravity of 0.75, and a mean gas temperature of 119°F (Surface 74°F , BHT 165°F & temp. gradient 1.400°/100 ft.)  
 String type: Production  
 The mud gradient and bottom hole pressures (for burst) are 0.436 psi/ft and 2,836 psi, respectively.

**NOTE:** The design factors used in this casing string design are as shown above. As a general guideline, Lone Star Steel recommends using minimum design factors of 1.125 - collapse (with evacuated casing), 1.0 - (uniaxial) burst, 1.8 - API 8rd tension, 1.6 - buttress tension, 1.5 - body yield tension, and 1.6 - EUE 8rd tension. Collapse strength under axial tension was calculated based on the Westcott, Dunlop and Kemler curve. Engineering responsibility for use of this design will be that of the purchaser.  
 Costs for this design are based on a 1987 pricing model. (Version 1.07)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. TYPE OF WORK  
 DRILL  DEEPEN  PLUG BACK

b. TYPE OF WELL  
 OIL WELL  GAS WELL  OTHER   
 SINGLE ZONE  MULTIPLE ZONE

2. NAME OF OPERATOR  
 Inland Production Company

3. ADDRESS OF OPERATOR  
 P.O. Box 1446 Roosevelt, Utah 84066

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.\*)  
 At surface NE/SW  
 At proposed prod. zone 1980' FWL & 1980' FSL

43-013-31633

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE\*  
 7.4 miles south of Myton, Utah

15. DISTANCE FROM PROPOSED\* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg. unit line, if any)  
 1980'

16. NO. OF ACRES IN LEASE  
 960

17. NO. OF ACRES ASSIGNED TO THIS WELL  
 40

18. DISTANCE FROM PROPOSED LOCATION\* TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT.  
 1320'

19. PROPOSED DEPTH  
 6500'

20. ROTARY OR CABLE TOOLS  
 Rotary


21. ELEVATIONS (Show whether DF, RT, GR, etc.)  
 5429' GR

22. APPROX. DATE WORK WILL START\*  
 2nd quarter 1996

23. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4	8 5/8	24#	300'	120 sx Class G+2% CaCl+2% Gel
7 7/8	5 1/2	15.5#	TD	400 sx Hilift followed by 330 sx Class G w/ 10% CaCl

The actual cement volumes will be calculated off of the open hole logs, plus 15% excess.

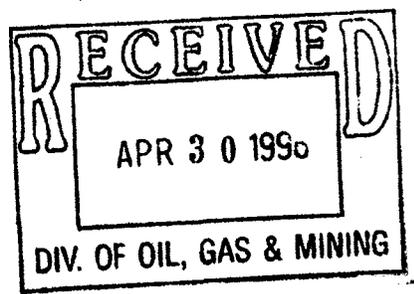

RECEIVED  
APR 01 1996

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED Brad Mechem *Brad Mechem* TITLE Operations Manager DATE 3/22/96

(This space for Federal or State office use)

PERMIT NO. \_\_\_\_\_ APPROVAL DATE \_\_\_\_\_

APPROVED BY Jerry Fenzler *Jerry Fenzler* TITLE Acting ASSISTANT DISTRICT MANAGER MINERALS DATE APR 29 1996

CONDITIONS OF APPROVAL, IF ANY:


NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED TO OPERATOR'S COPY

\*See Instructions On Reverse Side

44080-6m-094

CONDITIONS OF APPROVAL  
APPLICATION FOR PERMIT TO DRILL

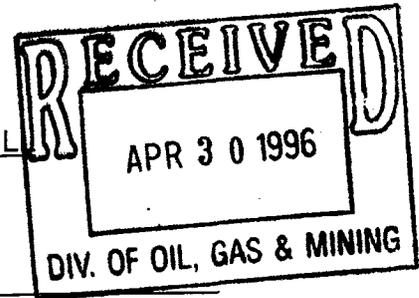

Company/Operator: Inland Production Company

Well Name & Number: Monument Butte Federal Northeast 11-24

API Number: 43-013-31633

Lease Number: U -67170

Location: NESW Sec. 24 T. 8S R. 16E

**NOTIFICATION REQUIREMENTS**

- |                                    |   |   |
|------------------------------------|---|---|
| Location Construction              | - | at least forty-eight (48) hours prior to construction of location and access roads.   |
| Location Completion                | - | prior to moving on the drilling rig.  |
| Spud Notice                        | - | at least twenty-four (24) hours prior to spudding the well.   |
| Casing String and<br>Cementing     | - | at least twenty-four (24) hours prior to running casing and cementing all casing strings.   |
| BOP and Related<br>Equipment Tests | - | at least twenty-four (24) hours prior to initiating pressure tests.   |
| First Production<br>Notice         | - | within five (5) business days after new well begins, or production resumes after well has been off production for more than ninety (90) days. |

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

**CONDITIONS OF APPROVAL FOR NOTICE TO DRILL**

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas Orders, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

**A. DRILLING PROGRAM****1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered**

Report ALL water shows and water-bearing sands to Tim Ingwell of this office. Copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

**2. Pressure Control Equipment**

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a 2M system and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

If an air compressor is on location and is being utilized to provide air for the drilling medium while drilling, the special drilling requirements in Onshore Oil and Gas Order No. 2, regarding air or gas drilling shall be adhered to. If a mist system is being utilized then the requirement for a deduster shall be waived.

The Vernal District Office shall be notified, at least 24 hours prior to initiating the pressure tests, in order to have a BLM representative on location during pressure testing.

3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint.

As a minimum, the usable water and oil shale resources shall be isolated and/or protected by having a cement top for the production casing at least 200 ft. above the base of the usable water, identified at 444 ft. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

The Vernal District Office shall be notified at least 24 hours prior to the running and cementing of all casing strings, in order to have a BLM representative on location while running and cementing all casing strings.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

All Drill Stem tests (DST) shall be accomplished during daylight hours, unless specific approval to start during other hours is obtained from the AO. However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e., lighting which is adequate for visibility and vaporproof for safe operations). Packers can be released, but tripping should not begin before daylight unless prior approval is obtained from the AO.

A cement bond log (CBL) will be run from the production casing shoe to  $\pm 244$  ft., and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office. A Dual Lateral log will be run from TD to the base of the surface casing. A Sonic log will be run from TD to a minimum of 200 ft above the top of the Mahogany oil shale.

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. Two copies of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the AO.

6. Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

The Vernal District Office shall be notified, during regular work hours (7:45 a.m.-4:30 p.m., Monday through Friday except holidays), at least 24 hours prior to spudding the well.

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Such notification will be sent by telegram or other written communication, not later than five (5) days following the date on which the well is placed on production.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-2, 3162.7-3, and 3162.7-4 shall be submitted to the appropriate District Office within thirty (30) days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-4.

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within thirty (30) days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling onlease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries. Tests for meter accuracy will be conducted on initial meter installations and at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed.

Well No.: Monument Butte Federal Northeast 11-24

All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, please contact one of the following individuals:

Ed Forsman (801) 789-7077  
Petroleum Engineer

Wayne P. Bankert (801) 789-4170  
Petroleum Engineer

Jerry Kenczka (801) 781-1190  
Petroleum Engineer

BLM FAX Machine (801) 781-4410

EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids.

**CONDITIONS OF APPROVAL  
FOR THE SURFACE USE PROGRAM**

-Access roads and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development, (1989).

-All vehicle travel will be confined to existing access road rights-of-way.

-No surface disturbing activities, construction, or drilling operations, including the initial completion activities, are to occur on the well, access road, or location from March 15 through August 15. This restriction is to protect Mountain Plovers and Burrowing Owls located in the surrounding area. The restriction does not apply to maintenance and operation of existing wells and facilities. Waivers, exceptions, or modifications to this Condition of Approval may be specifically approved in writing by the authorized officer of the Bureau of Land Management if either the resource values change or the lessee/operator demonstrates that adverse impacts can be mitigated.



State of Utah  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt  
Governor

Ted Stewart  
Executive Director

James W. Carter  
Division Director

355 West North Temple  
3 Triad Center, Suite 350  
Salt Lake City, Utah 84180-1203  
801-538-5340  
801-359-3940 (Fax)  
801-538-5319 (TDD)

June 25, 1996

Inland Production Company  
P.O. Box 1446  
Roosevelt, Utah 84066

Re: Monument Butte Federal NE 11-24 Well, 1980' FSL, 1980' FWL,  
NE SW, Sec. 24, T. 8 S., R. 16 E., Duchesne County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. 40-6-1 et seq., Utah Administrative Code R649-3-1 et seq., and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-013-31633.

Sincerely,

A handwritten signature in cursive script, appearing to read "R. J. Firth".

for R. J. Firth  
Associate Director

lwp

Enclosures

cc: Duchesne County Assessor  
Bureau of Land Management, Vernal District Office

Well Name & Number: Monument Butte Federal NE 11-24  
API Number: 43-013-31633  
Lease: U-67170  
Location: NE SW Sec. 24 T. 8 S. R. 16 E.

### Conditions of Approval

1. General  
Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for Permit to Drill.
2. Notification Requirements  
Notify the Division within 24 hours following spudding the well or commencing drilling operations. Contact Jimmie Thompson at (801)538-5340.  
  
Notify the Division prior to commencing operations to plug and abandon the well. Contact Frank Matthews or Mike Hebertson at (801)538-5340.
3. Reporting Requirements  
All required reports, forms and submittals shall be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or deepen or reentry to a different reservoir. Use "APPLICATION FOR PERMIT -" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well [X] Oil Well [ ] Gas well [ ] Other
2. Name of Operator Inland Production Company
3. Address and Telephone No. P.O. Box 790233 Vernal, UT 84079 Phone No. (801) 789-1866
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) NE/SW 1980' FWL & 1980' FSL Sec. 24, T8S, R16E

5. Lease Designation and Serial No. U-67170
6. If Indian, Allottee or Tribe Name
7. If unit or CA, Agreement Designation
8. Well Name and No. MBFNE #11-24
9. API Well No. 43-013-31633
10. Field and Pool, or Exploratory Area Monument Butte
11. County or Parish, State Duchesne, UT

12 CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


Table with columns TYPE OF SUBMISSION and TYPE OF ACTION. Includes checkboxes for Notice of Intent, Subsequent Report, Final Abandonment Notice, Abandonment, Recompletion, Plugging Back, Casing repair, Altering Casing, Other (APD Extension), Change of Plans, New Construction, Non-Routine Fracturing, Water Shut-off, Conversion to Injection, and Dispose Water.

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work)

Inland Production Company requests that a one year APD extension for the Monument Butte Federal #11-24 be granted.

extended -10 6/25/98 DTS

Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY

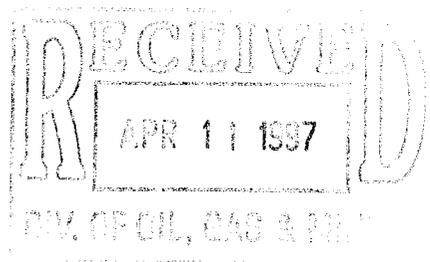

14. I hereby certify that the foregoing is true and correct. Signed Cheryl Cameron Title Regulatory Compliance Specialist Date 4/9/97

(This space of Federal or State office use.)

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_
Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly to make to any department of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

Name of Company: INLAND PRODUCTION CO

Well Name: MONUMENT BUTTE FEDERAL NE 11-24

Api No. 43-013-31633

Section: 24 Township: 8S Range: 16E County: DUCHESNE

Drilling Contractor: \_\_\_\_\_

Rig # \_\_\_\_\_

SPUDDED:

Date: 11/13/97

Time: \_\_\_\_\_

How: ROTARY

Drilling will commence: \_\_\_\_\_

Reported by: MIKE WARD

Telephone NO.: \_\_\_\_\_

Date: 11/18/97 Signed: JLT

✓

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry a different reservoir.  
Use "APPLICATION FOR PERMIT -" for such proposals

5. Lease Designation and Serial No.  
**U-67170**

6. If Indian, Allottee or Tribe Name  
**NA**

7. If Unit or CA, Agreement Designation  
**NA**

8. Well Name and No.  
**MBFNE 11-24**

9. API Well No.  
**43-013-31633**

10. Field and Pool, or Exploratory Area  
**MONUMENT BUTTE**

11. County or Parish, State  
**DUCHESNE COUNTY, UTAH**

*SUBMIT IN TRIPLICATE*

1. Type of Well  
 Oil Well     Gas Well     Other

2. Name of Operator  
**INLAND PRODUCTION COMPANY**

3. Address and Telephone No.  
**475 17TH STREET, SUITE 1500, DENVER, COLORADO 80202 (303) 292-0900**

4. Location of Well (Footage, Sec., T., R., m., or Survey Description)  
**1980 FWL 1980 FSL      NE/SW Section 24, T08S R16E**


12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent <input checked="" type="checkbox"/> Subsequent Report <input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Abandonment <input type="checkbox"/> Recompletion <input type="checkbox"/> Plugging Back <input type="checkbox"/> Casing Repair <input type="checkbox"/> Altering Casing <input checked="" type="checkbox"/> Other <b>Surface Spud</b>
	<input type="checkbox"/> Change of Plans <input type="checkbox"/> New Construction <input type="checkbox"/> Non-Routine Fracturing <input type="checkbox"/> Water Shut-Off <input type="checkbox"/> Conversion to Injection <input type="checkbox"/> Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

MIRU Union #7. Drl & set 15' of 13-3/8" conductor @ 21'. **SPUD DRL RIG @ 3:00 PM, 11/13/97.** Drl 21' - 37'. Bit & hammer sleeve unscrewed & fell into hole. Hole sloughing. WD 12-1/4" bit to clean hole. Try to clean hole. Cuttings falling into cavern @ 30' KB. WO 14" conductor. Set conductor @ 35' KB. Fish for 12-1/4" bit & sleeve. Fishing for flat-bottom bit, hammer sleeve and flanges. Retrieved hammer sleeve only. Pulled 14" conductor. Fill hole w/65 sx Premix cmt (Class A, 15.6 ppg, 1.18 cf/sk yield). Cmt level held 10' below GL. Hole plugged @ 4:45 pm, 11/14/97. RD WO truck to skid rig. Dump 30 sx Premix (Class A, 15.6 ppg & 1.18 cf/sk yield) to fill old hole w/cmt. Skid Union rig 15' NE and 8' NW fr/original hole.

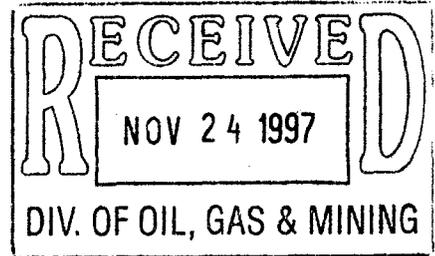

14. I hereby certify that the foregoing is true and correct

Signed Shannon Smith Title Engineering Secretary Date 11/19/97

(This space for Federal or State office use)

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_

Conditions of approval, if any:

**CC: UTAH DOGM**

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry a different reservoir.  
Use "APPLICATION FOR PERMIT -" for such proposals

5. Lease Designation and Serial No.  
**U-67170**

6. If Indian, Allottee or Tribe Name  
**NA**

7. If Unit or CA, Agreement Designation  
**NA**

8. Well Name and No.  
**MBFNE 11-24**

9. API Well No.  
**43-013-31633**

10. Field and Pool, or Exploratory Area  
**MONUMENT BUTTE**

11. County or Parish, State  
**DUCHESNE COUNTY, UTAH**

**SUBMIT IN TRIPLICATE**

1. Type of Well  
 Oil Well     Gas Well     Other

2. Name of Operator  
**INLAND PRODUCTION COMPANY**

3. Address and Telephone No.  
**475 17TH STREET, SUITE 1500, DENVER, COLORADO 80202 (303) 292-0900**

4. Location of Well (Footage, Sec., T., R., m., or Survey Description)  
**1980 FWL 1980 FSL      NE/SW Section 24, T08S R16E**

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Abandonment
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Plugging Back
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Altering Casing
	<input checked="" type="checkbox"/> Other <b>Surface Spud</b>
	<input type="checkbox"/> Change of Plans
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

MIRU Union #7. Drl & set 15' of 13-3/8" conductor @ 21'. **SPUD DRL RIG @ 3:00 PM, 11/13/97.** Drl 21' - 37'. Bit & hammer sleeve unscrewed & fell into hole. Hole sloughing. WD 12-1/4" bit to clean hole. Try to clean hole. Cuttings falling into cavern @ 30' KB. WO 14" conductor. Set conductor @ 35' KB. Fish for 12-1/4" bit & sleeve. Fishing for flat-bottom bit, hammer sleeve and flanges. Retrieved hammer sleeve only. Pulled 14" conductor. Fill hole w/65 sx Premix cmt (Class A, 15.6 ppg, 1.18 cf/sk yield). Cmt level held 10' below GL. Hole plugged @ 4:45 pm, 11/14/97. RD WO truck to skid rig. Dump 30 sx Premix (Class A, 15.6 ppg & 1.18 cf/sk yield) to fill old hole w/cmt. Skid Union rig 15' NE and 8' NW fr/original hole.

14. I hereby certify that the foregoing is true and correct

Signed Shannon Smith Title Engineering Secretary Date 11/19/97

(This space for Federal or State office use)

Approved by NOTED Title \_\_\_\_\_ Date DEC 11 1997

Conditions of approval, if any:  
**CC: UTAH DOGM**

SUBMIT IN DUPLICATE\*  
(See other instructions on reverse side)

FORM APPROVED  
OMB NO. 1004-0137  
Expires: February 28, 1995

**UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT**

**WELL COMPLETION OR RECOMPLETION REPORT AND LOG\***

5. LEASE DESIGNATION AND SERIAL NO.  
**U-67170**

6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
**N/A**

7. UNIT AGREEMENT NAME  
**N/A**

8. FARM OR LEASE NAME, WELL NO.  
**MBFNE #11-24**

9. API WELL NO.  
**43-013-31633**

10. FIELD AND POOL OR WILDCAT  
**Monument Butte**

11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA  
**Section 24, T8S, R16E**

1a. TYPE OF WORK

OIL WELL  GAS WELL  DRY  Other \_\_\_\_\_

1b. TYPE OF WELL

NEW WELL  WORK OVER  DEEPEN  PLUG BACK  DIFF. RESVR.  Other \_\_\_\_\_

2. NAME OF OPERATOR

**Inland Production Company**

3. ADDRESS AND TELEPHONE NO.

**410 17th Street, Suite 700, Denver, Colorado 80202**

4. LOCATION OF WELL (Report locations clearly and in accordance with any State requirements. \*)

At Surface **NE/SW 1980' FWL and 1980' FSL**

At top prod. Interval reported bel

14. PERMIT NO. **43-013-31633** DATE ISSUED **11-23-97**

12. COUNTY OR PARISH **Duchesne** 13. STATE **Utah**

15. DATE SPUNDED **11-13-97** 16. DATE T.D. REACHED **11-14-97** 17. DATE COMPL. (Ready to prod.) **11-14-97 N/A** 18. ELEVATIONS (DF, RKB, RT, GR, ETC.)\* \_\_\_\_\_ 19. ELEV. CASINGHEAD \_\_\_\_\_

20. TOTAL DEPTH, MD & TVD <b>37'</b>	21. PLUG, BACK T.D., MD & TVD <b>N/A</b>	22. IF MULTIPLE COMPL., HOW MANY* <b>N/A</b>	23. INTERVALS DRILLED BY <b>-----&gt;</b>	ROTARY TOOLS <b>X</b>	CABLE TOOLS _____
---	---	---	--	--------------------------	----------------------

24. PRODUCING INTERVAL(S), OF THIS COMPLETION--TOP, BOTTOM, NAME (MD AND TVD)\*  
**N/A**

25. WAS DIRECTIONAL SURVEY MADE \_\_\_\_\_

26. TYPE ELECTRIC AND OTHER LOGS RUN **CEMENT BOND LOG 3-13-98**  
**SPECTRAL DENSITY DUAL SPACED NEUTRON & DUAL INDUCTION GUARD LOG**

27. WAS WELL CORED \_\_\_\_\_

23. CASING RECORD (Report all strings set in well)					
CASING SIZE/GRADE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	TOP OF CEMENT, CEMENTING RECORD	AMOUNT PULLED
<b>N/A</b>			<b>12-1/4"</b>	<b>95 sxs Premium</b>	

29. LINER RECORD				30. TUBING RECORD			
SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
<b>N/A</b>						<b>N/A</b>	

31. PERFORATION RECORD (Interval, size and number)		32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.	
		DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
<b>N/A</b>			

33.* PRODUCTION							
DATE FIRST PRODUCTION	PRODUCTION METHOD (Flowing, gas lift, pumping--size and type of pump)					WELL STATUS (Producing or shut-in)	
<b>N/A</b>						<b>Plugged</b>	
DATE OF TEST	HOURS TESTED	CHOKE SIZE	PROD'N. FOR TEST PERIOD	OIL--BBL.	GAS--MCF.	WATER--BBL.	GAS-OIL RATIO
			----->				
FLOW TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE	OIL--BBL.	GAS--MCF.	WATER--BBL.	OIL GRAVITY-API (CORR.)	
		----->					

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.) \_\_\_\_\_ TEST WITNESSED BY \_\_\_\_\_

35. LIST OF ATTACHMENTS \_\_\_\_\_

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIGNED *Debra C. Knight* TITLE *Permitting Specialist* DATE *2/23/98*

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem, tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries);

38. **GEOLOGIC MARKERS**

FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	NAME	TOP	
					MEAS. DEPTH	TRUE VERT. DEPTH
No zones encountered.						


Spud Date: 11/13/97  
Plugged: 11/14/97

# Monument Butte Federal NE #11-24

P&A Diagram

SURFACE CASING

CSG SIZE:  
GRADE:  
WEIGHT:  
LENGTH:  
DEPTH LANDED:  
HOLE SIZE: 12-1/4"  
CEMENT DATA:



**Inland Resources Inc.**

**Monument Butte Federal NE #11-24**

1980 FWL 1980 FSL

NESW Section 24-T8S-R16E

Duchesne Co, Utah

API #43-013-31633; Lease #U-67170



# United States Department of the Interior



## BUREAU OF LAND MANAGEMENT

Utah State Office

P.O. Box 45155

Salt Lake City, UT 84145-0155

<http://www.blm.gov>

IN REPLY REFER TO:

3106

(UT-924)

September 16, 2004

### Memorandum

To: Vernal Field Office

From: Acting Chief, Branch of Fluid Minerals

Subject: Merger Approval

Attached is an approved copy of the name change recognized by the Utah State Office. We have updated our records to reflect the merger from Inland Production Company into Newfield Production Company on September 2, 2004.

Michael Coulthard  
Acting Chief, Branch of  
Fluid Minerals

### Enclosure

1. State of Texas Certificate of Registration

cc: MMS, Reference Data Branch, James Sykes, PO Box 25165, Denver CO 80225  
State of Utah, DOGM, Attn: Earlene Russell, PO Box 145801, SLC UT 84114  
Teresa Thompson  
Joe Incardine  
Connie Seare

UTSL-	15855	61052	73088	76561	
071572A	16535	62848	73089	76787	
065914	16539	63073B	73520A	76808	
	16544	63073D	74108	76813	
	17036	63073E	74805	76954	63073X
	17424	63073O	74806	76956	63098A
	18048	64917	74807	77233	68528A
UTU-	18399	64379	74808	77234	72086A
	19267	64380	74389	77235	72613A
02458	26026A	64381	74390	77337	73520X
03563	30096	64805	74391	77338	74477X
03563A	30103	64806	74392	77339	75023X
04493	31260	64917	74393	77357	76189X
05843	33992	65207	74398	77359	76331X
07978	34173	65210	74399	77365	76788X
09803	34346	65635	74400	77369	77098X
017439B	36442	65967	74404	77370	77107X
017985	36846	65969	74405	77546	77236X
017991	38411	65970	74406	77553	77376X
017992	38428	66184	74411	77554	78560X
018073	38429	66185	74805	78022	79485X
019222	38431	66191	74806	79013	79641X
020252	39713	67168	74826	79014	80207X
020252A	39714	67170	74827	79015	81307X
020254	40026	67208	74835	79016	
020255	40652	67549	74868	79017	
020309D	40894	67586	74869	79831	
022684A	41377	67845	74870	79832	
027345	44210	68105	74872	79833	
034217A	44426	68548	74970	79831	
035521	44430	68618	75036	79834	
035521A	45431	69060	75037	80450	
038797	47171	69061	75038	80915	
058149	49092	69744	75039	81000	
063597A	49430	70821	75075		
075174	49950	72103	75078		
096547	50376	72104	75089		
096550	50385	72105	75090		
	50376	72106	75234		
	50750	72107	75238		
10760	51081	72108	76239		
11385	52013	73086	76240		
13905	52018	73087	76241		
15392	58546	73807	76560		



## Office of the Secretary of State

The undersigned, as Secretary of State of Texas, does hereby certify that the attached is a true and correct copy of each document on file in this office as described below:

Newfield Production Company  
Filing Number: 41530400

Articles of Amendment

September 02, 2004

In testimony whereof, I have hereunto signed my name officially and caused to be impressed hereon the Seal of State at my office in Austin, Texas on September 10, 2004.



A handwritten signature in black ink, appearing to read "G. Connor".

Secretary of State

ARTICLES OF AMENDMENT  
TO THE  
ARTICLES OF INCORPORATION  
OF  
INLAND PRODUCTION COMPANY

FILED  
In the Office of the  
Secretary of State of Texas  
SEP 02 2004  
Corporations Section

Pursuant to the provisions of Article 4.04 of the Texas Business Corporation Act (the "TBCA"), the undersigned corporation adopts the following articles of amendment to the articles of incorporation:

ARTICLE 1 – Name

The name of the corporation is Inland Production Company.

ARTICLE 2 – Amended Name

The following amendment to the Articles of Incorporation was approved by the Board of Directors and adopted by the shareholders of the corporation on August 27, 2004.

The amendment alters or changes Article One of the Articles of Incorporation to change the name of the corporation so that, as amended, Article One shall read in its entirety as follows:

"ARTICLE ONE – The name of the corporation is Newfield Production Company."

ARTICLE 3 – Effective Date of Filing

This document will become effective upon filing.

The holder of all of the shares outstanding and entitled to vote on said amendment has signed a consent in writing pursuant to Article 9.10 of the TBCA, adopting said amendment, and any written notice required has been given.

IN WITNESS WHEREOF, the undersigned corporation has executed these Articles of Amendment as of the 1<sup>st</sup> day of September, 2004.

INLAND RESOURCES INC.

By: Susan G. Riggs  
Susan G. Riggs, Treasurer

**OPERATOR CHANGE WORKSHEET**

**ROUTING**

1. GLH
2. CDW
3. FILE

Change of Operator (Well Sold)

Designation of Agent/Operator

**X Operator Name Change**

**Merger**

The operator of the well(s) listed below has changed, effective:

**9/1/2004**

<b>FROM:</b> (Old Operator): N5160-Inland Production Company Route 3 Box 3630 Myton, UT 84052 Phone: 1-(435) 646-3721	<b>TO:</b> ( New Operator): N2695-Newfield Production Company Route 3 Box 3630 Myton, UT 84052 Phone: 1-(435) 646-3721
---	--

**CA No.**

**Unit:**

**WELL(S)**

NAME	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
MONUMENT BUTTE FED NE 16-24	24	080S	160E	4301331629	11907	Federal	OW	S
MONUMENT BUTTE FED 14-24	24	080S	160E	4301331630	11930	Federal	OW	P
MONUMENT BUTTE FED NE 11-24	24	080S	160E	4301331633	99998	Federal	D	PA
MONUMENT BUTTE FED 6-25	25	080S	160E	4301331596	11882	Federal	OW	P
MONUMENT BUTTE FED 16-25	25	080S	160E	4301331597	11899	Federal	OW	P
MONUMENT BUTTE FED 8-25	25	080S	160E	4301331601	11881	Federal	OW	P
MONUMENT BUTTE FED 2-25	25	080S	160E	4301331604	11887	Federal	OW	P
MONUMENT BUTTE ST 8-36	36	080S	160E	4301331598	11879	State	OW	P
MONUMENT BUTTE ST 15-2	02	090S	160E	4301331567	99998	State	OW	LA
MON FED 32-10-9-17Y	10	090S	170E	4301331592	11909	Federal	D	PA
MON FED 11-11-9-17Y	11	090S	170E	4301331593	11904	Federal	OW	S
S PLEASANT VALLEY FED 9-19	19	090S	170E	4301331610	11978	Federal	D	PA
MON FED 21-23-9-17Y	23	090S	170E	4301331624	11894	Federal	D	PA

**OPERATOR CHANGES DOCUMENTATION**

Enter date after each listed item is completed

1. (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 9/15/2004
2. (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 9/15/2004

3. The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 2/23/2005

4. Is the new operator registered in the State of Utah: YES Business Number: 755627-0143

5. If **NO**, the operator was contacted contacted on:

6a. (R649-9-2)Waste Management Plan has been received on: IN PLACE  
6b. Inspections of LA PA state/fee well sites complete on: waived

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM BIA

8. **Federal and Indian Units:**  
The BLM or BIA has approved the successor of unit operator for wells listed on: n/a

9. **Federal and Indian Communization Agreements ("CA"):**  
The BLM or BIA has approved the operator for all wells listed within a CA on: na/

10. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: 2/23/2005

**DATA ENTRY:**

1. Changes entered in the **Oil and Gas Database** on: 2/28/2005
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 2/28/2005
3. Bond information entered in RBDMS on: 2/28/2005
4. Fee/State wells attached to bond in RBDMS on: 2/28/2005
5. Injection Projects to new operator in RBDMS on: 2/28/2005
6. Receipt of Acceptance of Drilling Procedures for APD/New on: waived

**FEDERAL WELL(S) BOND VERIFICATION:**

1. Federal well(s) covered by Bond Number: UT 0056

**INDIAN WELL(S) BOND VERIFICATION:**

1. Indian well(s) covered by Bond Number: 61BSBDH2912

**FEE & STATE WELL(S) BOND VERIFICATION:**

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number 61BSBDH2919
2. The **FORMER** operator has requested a release of liability from their bond on: n/a\*  
The Division sent response by letter on: n/a

**LEASE INTEREST OWNER NOTIFICATION:**

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: n/a

**COMMENTS:**

\*Bond rider changed operator name from Inland Production Company to Newfield Production Company - received 2/23/05

NEWFIELD PRODUCTION COMPANY  
 RT. 3 BOX 3630  
 MYTON, UT 84052

ENTITY ACTION FORM  
 DEPARTMENT OF NATURAL RESOURCES  
 DIVISION OF OIL, GAS AND MINING

FORM 6

OPERATOR ACCT NO: N2695

ACTIN CODE	CRRNT ENTITY	NEW ENTITY	API NUMBER	WELL	QQ	SEC	TWN	RNG	REASON	EFFECTIVE
D	14648	15150	4301332359	FEDERAL 9-24-8-16	NENSE	24	8S	16E	Monument Butte North East EOR	1/1/2006
D	99998	15150	4301331633	MONUMENT BUTTE FED NE 11-24	NESW	24	8S	16E	Monument Butte North East EOR	1/1/2006
D	12293	15150	4301331990	MBFNE 11-24-8-16	NESW	24	8S	16E	Monument Butte North East EOR	1/1/2006
D	14611	15150	4301332366	FEDERAL 10-24-8-16	NWSE	24	8S	16E	Monument Butte North East EOR	1/1/2006
D	12244	15150	4301331923	MBFNE 12-24	NWSW	24	8S	16E	Monument Butte North East EOR	1/1/2006
D	11907	15150	4301331629	MONUMENT BUTTE FED NE 16-24	SESE	24	8S	16E	Monument Butte North East EOR	1/1/2006
D	11930	15150	4301331630	MONUMENT BUTTE FED 14-24	SESW	24	8S	16E	Monument Butte North East EOR	1/1/2006
D	11912	15150	4301331628	MON BUTTE FED NE 15-24	SWSE	24	8S	16E	Monument Butte North East EOR	1/1/2006
D	11984	15150	4301331653	MON BUTTE FED NE 13-24	SWSW	24	8S	16E	Monument Butte North East EOR	1/1/2006
D	11884	15150	4301331608	MON BUTTE FED 1-25(I)	NENE	25	8S	16E	Monument Butte North East EOR	1/1/2006
D	11881	15150	4301331601	MONUMENT BUTTE FED 8-25	SENE	25	8S	16E	Monument Butte North East EOR	1/1/2006
D	11887	15150	4301331604	MONUMENT BUTTE FED 2-25	NWNE	25	8S	16E	Monument Butte North East EOR	1/1/2006
D	11873	15150	4301331561	MON BUTTE FED 7-25	SWNE	25	8S	16E	Monument Butte North East EOR	1/1/2006
D	11882	15150	4301331596	MONUMENT BUTTE FED 6-25	SENE	25	8S	16E	Monument Butte North East EOR	1/1/2006
D	11922	15150	4301331605	MON BUTTE FED 3-25	NENW	25	8S	16E	Monument Butte North East EOR	1/1/2006
D	11897	15150	4301331600	MON BUTTE FED 9-25	NESE	25	8S	16E	Monument Butte North East EOR	1/1/2006
D	11874	15150	4301331562	MONUMENT BUTTE FED 10-25	NWSE	25	8S	16E	Monument Butte North East EOR	1/1/2006
D	11899	15150	4301331597	MONUMENT BUTTE FED 16-25	SESE	25	8S	16E	Monument Butte North East EOR	1/1/2006
D	11847	15150	4301331559	MON BUTTE FED 15-25	SWSE	25	8S	16E	Monument Butte North East EOR	1/1/2006
D	11840	15150	4301331554	MONUMENT BUTTE FED 12-25	NWSW	25	8S	16E	Monument Butte North East EOR	1/1/2006
D	11841	15150	4301331553	MON BUTTE FED 11-25	NESW	25	8S	16E	Monument Butte North East EOR	1/1/2006
D	11805	15150	4301331531	MONUMENT BUTTE FED 14-25	SESW	25	8S	16E	Monument Butte North East EOR	1/1/2006
D	11786	15150	4301331513	MON BUTTE FED 13-25	SWSW	25	8S	16E	Monument Butte North East EOR	1/1/2006
D	11900	15150	4301331502	MON BUTTE FED 15-26	SWSE	26	8S	16E	Monument Butte North East EOR	1/1/2006
D	11814	15150	4301331517	MONUMENT BUTTE FED 16-26	SESE	26	8S	16E	Monument Butte North East EOR	1/1/2006

*new entity assigned 1/31/06  
 ER, DOGM*

**RECEIVED**  
**JAN 25 2006**

KIM KETTLE  
 PRODUCTION CLERK 1/25/2006