

**UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT**

**APPLICATION FOR PERMIT TO DRILL OR DEEPEN**

1a. TYPE OF WORK  
**DRILL**       **DEEPEN**

b. TYPE OF WELL  
Oil Well       Gas Well       Other   
Single Zone       Multiple Zone

2. Name of Operator  
**PETROGLYPH ENERGY, INC.**

3. Address and Telephone Number  
**P.O. BOX 607, ROOSEVELT, UT 84066 (435) 722-2531**

4. Location of Well (Report location clearly and in accordance with any State requirements.)  
At surface: **1851' FSL & 2011' FEL NW/SE**      *4431128 N*  
At proposed prod. Zone: **562908 E**

5. Lease designation and serial number  
**BIA-14-20-H62-3514**

6. If Indian, Allottee or Tribe name  
**UTE TRIBAL LAND**

7. Unit Agreement Name

8. Farm or lease name, well no.  
**UTE TRIBAL**

9. API Well No.  
**UT 19-10**

10. Field and pool, or wildcat  
**ANTELOPE CREEK**

11. Sec., T., R., M., or BLK. and survey or area  
**SEC. 19, T5S, R3W**

12. County or parish  
~~UNTAH~~ **Duchesne**

13. State  
**UTAH**

14. Distance in miles and direction from nearest town or post office  
**20.7 MILES SOUTHWEST OF MYTON, UTAH**

15. Distance from proposed location to nearest property or lease line, ft.  
**1851'**

16. No. of acres in lease  
**640**

17. No. of acres assigned to this well  
**40**

18. Distance from proposed location to nearest well, drilling, completed, or applied for, on this lease, ft.

19. Proposed depth  
**6273'**

20. Rotary or cable tools  
**ROTARY**

21. Elevations (show whether DF, RT, GR, etc.)  
**6384 FEET GRADED GROUND**

22. Approx. date work will start  
**OCTOBER 2000**

PROPOSED CASING AND CEMENTING PROGRAM				QUANTITY OF CEMENT	
SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH		
12 1/4"	8 5/8"	24#	250'	135 SX CLASS "G" + 2% CaCl <sub>2</sub> + 1/4 #/SX CELLOFLAKE.	
7 7/8"	5 1/2"	15.50#	6273'	50/50 POXMIX + 2% GEL + 10% SALT TO 400' ABOVE ALL ZONES OF INTEREST (+10% EXCESS). LIGHT CEMENT (11PPG+) + LCM TO 200' ABOVE OIL SHALE OR FRESH WATER INTERVALS (+ 5% EXCESS).	

SEE ATTACHMENTS FOR:

**CONFIDENTIAL**

- 8 POINT PLAN
- BOP SCHEMATIC
- SURFACE USE AND OPERATING PLAN
- LOCATION PLAT
- LOCATION LAYOUT
- TOPOGRAPHIC MAPS "A", "B", C AND "D"

**EOG RESOURCES, INC. WILL BE THE DESIGNATED OPERATOR OF THE SUBJECT WELL UNDER BOND #BO 4556.**

**RECEIVED**

Pc: UTAH DIVISION OF OIL, GAS, AND MINING  
BUREAU OF INDIAN AFFAIRS, FORT DUCHESNE, UTAH

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED *Ed Little* TITLE Agent DATE 7-14-2000

(This space for Federal or State office use)

PERMIT NO. 43-013-32182 FEDERAL APPROVAL OF THIS ACTION IS NECESSARY APPROVAL DATE \_\_\_\_\_

Application approval does not warrant or certify that the applicant has legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.


CONDITIONS OF APPROVAL, IF ANY:

APPROVED BY *Bradley G. Hill* TITLE BRADLEY G. HILL DATE 9/18/00  
**RECLAMATION SPECIALIST III**

# T5S, R3W, U.S.B.&M.


## PETROGLYPH OPERATING CO., INC.

Well Location, UTE TRIBAL #19-10, located as shown in the NW 1/4 SE 1/4 of Section 19, T5S, R3W, U.S.B.&M. Duchesne County, Utah.

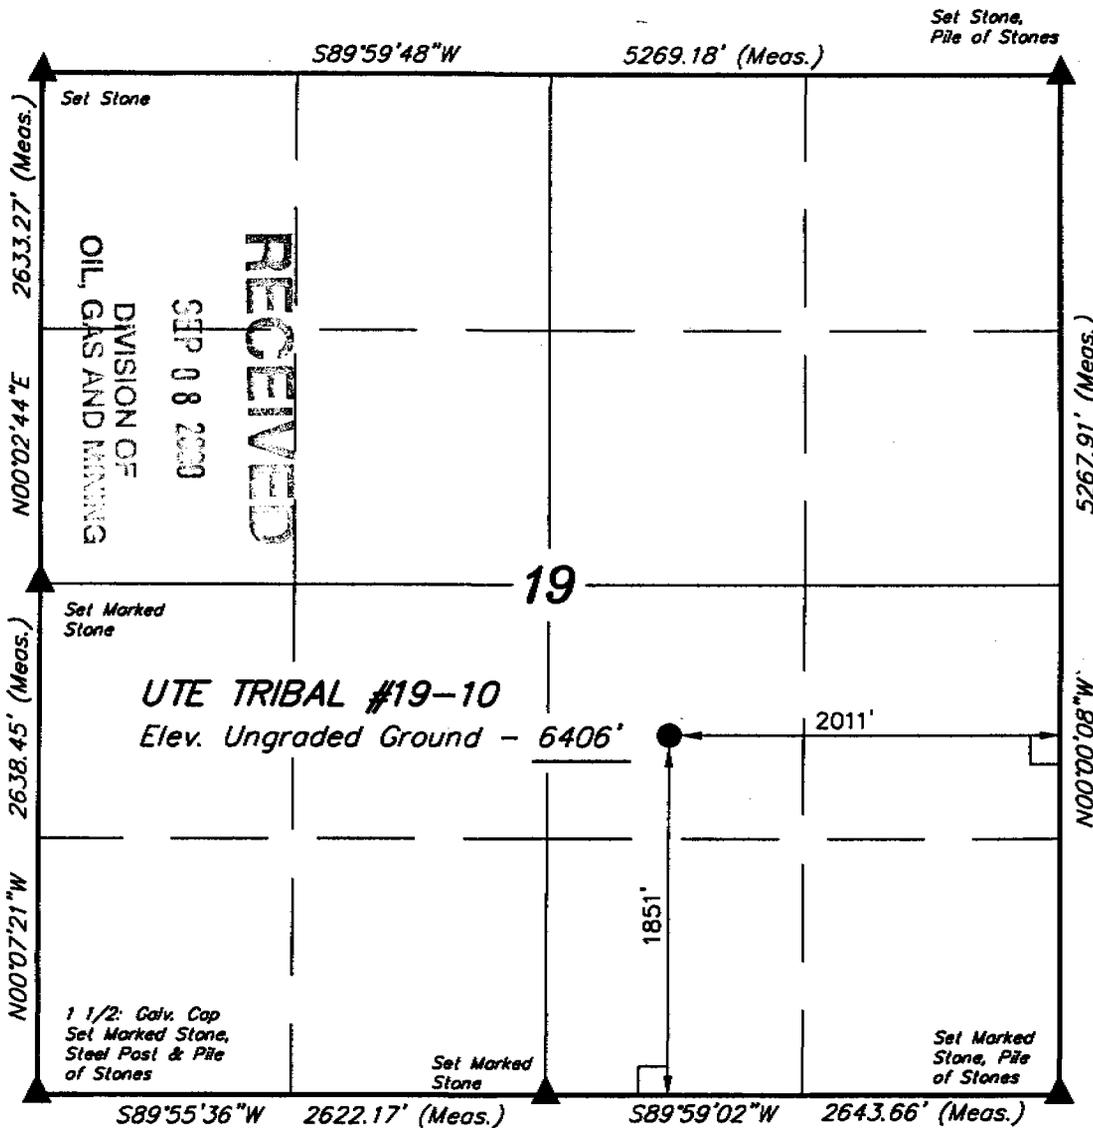

### BASIS OF ELEVATION

SPOT ELEVATION AT THE SOUTHWEST CORNER OF SECTION 19, T5S, R3W, U.S.B.&M. TAKEN FROM THE DUCHESNE SE QUADRANGLE, UTAH, DUCHESNE COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 6116 FEET.

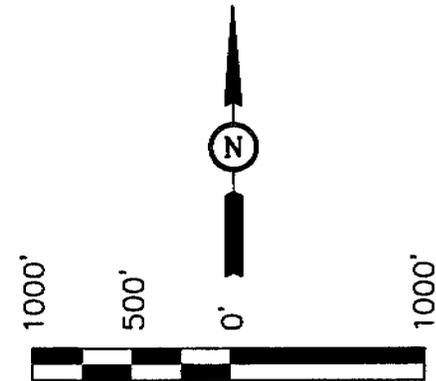

SCALE

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

*[Signature]*  
 REGISTERED LAND SURVEYOR  
 REGISTRATION NO. 167319  
 STATE OF UTAH

### UINTAH ENGINEERING & LAND SURVEYING

85 SOUTH 200 EAST - VERNAL, UTAH 84078

(435) 789-1017

#### LEGEND:

└─┘ = 90° SYMBOL

● = PROPOSED WELL HEAD.

▲ = SECTION CORNERS LOCATED.

LATITUDE =  $40^{\circ}01'47''$   
 LONGITUDE =  $110^{\circ}15'45''$

#### NOTE:

BASIS OF BEARINGS IS THE WEST LINE OF SECTION 30, T5S, R3W, U.S.B.&M. WHICH IS ASSUMED FROM G.L.O. INFORMATION TO BEAR NORTH.

SCALE 1" = 1000'	DATE SURVEYED: 5-18-00	DATE DRAWN: 6-15-00
PARTY G.S. T.A. C.B.T.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE PETROGLYPH OPERATING CO., INC.	

**Petroglyph Energy, Inc.**  
**P.O. Box 607**  
**Roosevelt, Utah 84066**

August 28, 2000

Utah Division of Oil, Gas, & Mining  
1594 West North Temple  
Box 145801  
Salt Lake City, UT 84114-5801

**RE: APPLICATION FOR PERMIT TO DRILL**  
**UTE TRIBAL #19-10**  
**NW/SE, SEC. 19, T5S, R3W**  
**DUCHESNE COUNTY, UTAH**  
**LEASE NO.: BIA 14-20-H62-3514**  
**UTE TRIBAL LANDS**

Enclosed please find a copy of the Application for Permit to Drill and associated attachments for the referenced well.

Please address further communication regarding this matter (including approval) to:

Ed Trotter  
P.O. Box 1910  
Vernal, UT 84078  
Phone: (435)789-4120  
Fax: (435)789-1420

Sincerely,

  
Ed Trotter  
Agent  
Petroglyph Energy, Inc.

Attachments

UDOGM-TRIBAL-POCI

**RECEIVED**

SEP 08 2000

DIVISION OF  
OIL, GAS AND MINING

**EIGHT POINT PLAN**  
**UTE TRIBAL #19-10**  
**NW/SE, SEC. 19, T5S,R3W**  
**DUCHESNE COUNTY, UTAH**

**1. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

<b>FORMATIONS</b>	<b>DEPTH</b>	<b>SUBSEA</b>
Mahogany Shale	2839	3555
"X" Marker	4419	1975
Douglas Creek	4557	1837
"B" Limestone	4942	1452
Castle Peak Limestone	5499	895
Basal Carbonate Limestone	5923	471
Total Depth	6273	121

Anticipated BHP                      2000 psi

**2. ESTIMATED DEPTHS OF ANTICIPATEE WATER, OIL, GAS OR MINERALS FORMATIONS:**

<b><u>Substance</u></b>	<b><u>Formation</u></b>	<b><u>Depth</u></b>	<b><u>Subsea</u></b>
Oil/Gas	Douglas Creek	4557	1837
Oil/Gas	B/Castle Peak	5499	895
Other mineral zones	N/A		

**3. PRESSURE CONTROL EQUIPMENT:** BOP Schematic Diagram attached.

**4. CASING PROGRAM:**

<b><u>HOLE SIZE</u></b>	<b><u>INTERVAL</u></b>	<b><u>LENGTH</u></b>	<b><u>SIZE</u></b>	<b><u>WEIGHT</u></b>	<b><u>GRADE</u></b>	<b><u>MINIMUM SAFETY FACTOR</u></b>		
						<b><u>COLLAPSE</u></b>	<b><u>BURST</u></b>	<b><u>TENSILE</u></b>
12 ¼	0 - 250'	250'	8 5/8	24.0 #	J-55	1370 PSI	2950 PSI	263,000#
7 7/8	0' - 6273'	6273'	5 ½	15.5 #	M-50	3650 PSI	4550 PSI	186,000#

All casing will be new or inspected.

**RECEIVED**

SEP 08 2000

DIVISION OF  
OIL, GAS AND MINING

**EIGHT POINT PLAN**  
**UTE TRIBAL #19-10**  
**NW/SE, SEC. 19, T5S,R3W**  
**DUCHESNE COUNTY, UTAH**

**5. MUD PROGRAM**

<b><u>INTERVAL</u></b>	<b><u>MUD TYPE</u></b>
0' - 250'	Air
250' - 4000'	Air/Mist & Aerated Water
4000' - TD	Air/3% KCL water or KCL substitute
TD	Gel/polyacrylamide polymer w/5-10% LCM

Sufficient mud inventory will be maintained on location during drilling to handle any adverse conditions that may arise.

**6. VARIANCE REQUESTS:**

- A. Petroglyph Energy, Inc. requests a variance to regulations requiring a straight run blooie line.
- B. Petroglyph Energy, Inc. requests a variance to regulations requiring an automatic ignitor or continuous pilot light on the blooie line.

**7. EVALUATION PROGRAM:**

Logs: Mud Logging	T.D. to base of surface casing
Compensated Density-Compensated Neutron Log	T.D. to base of surface casing
Dual Laterlog - Micro-SFL	T.D. to base of surface casing
Numar (Magnetic Resonance Imaging Log)	@ Geologist's discretion

Cores: None Programmed  
DST: None Programmed

Completion: To be submitted at a later date.

**8. ABNORMAL CONDITIONS:**

None anticipated.

**RECEIVED**

SEP 08 2000

DIVISION OF  
OIL, GAS AND MINING

**EIGHT POINT PLAN**

**UTE TRIBAL #19-10**  
**NW/SE, SEC. 19, T5S,R3W**  
**DUCHESNE COUNTY, UTAH**

**9. STANDARD REQUIRED EQUIPMENT:**

- A. Choke Manifold
- B. Kelly Clock
- C. Stabbing Valve
- D. Visual Mud Monitoring

**10. HAZARDOUS CHEMICALS:**

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

(Attachment: BOP Schematic Diagram)

**RECEIVED**

**SEP 08 2009**


**DIVISION OF  
OIL, GAS AND MINING**

# 3000 PSIG DIAGRAM

ANNULAR PREVENTOR AND BOTH RAMS ARE 3000 RATED.  
 CASING FLANGE IS 11" 3000 PSIG RATED.  
 BOPE 11" 3000 PSIG

## TESTING PROCEDURE:

1. BOPE 's will be tested with a professional tester to conform to Onshore Order #2 with retest every 14 days.
2. Blind & Pipe rams will be tested to rated working pressure, 3000 psig
3. Annular preventor will be tested to 50% of working pressure, 1500 psig
4. Casing will be tested to 0.22 psi/ft. or 1500 psig. Not to exceed 70% of burst strength, whichever is greater.
5. All lines subject to well pressure will be pressure tested to the same pressure as blind & pipe rams.
6. All BOPE specifications and configurations will meet Onshore Order #2 requirements for 3000 psig BOPE specifications.

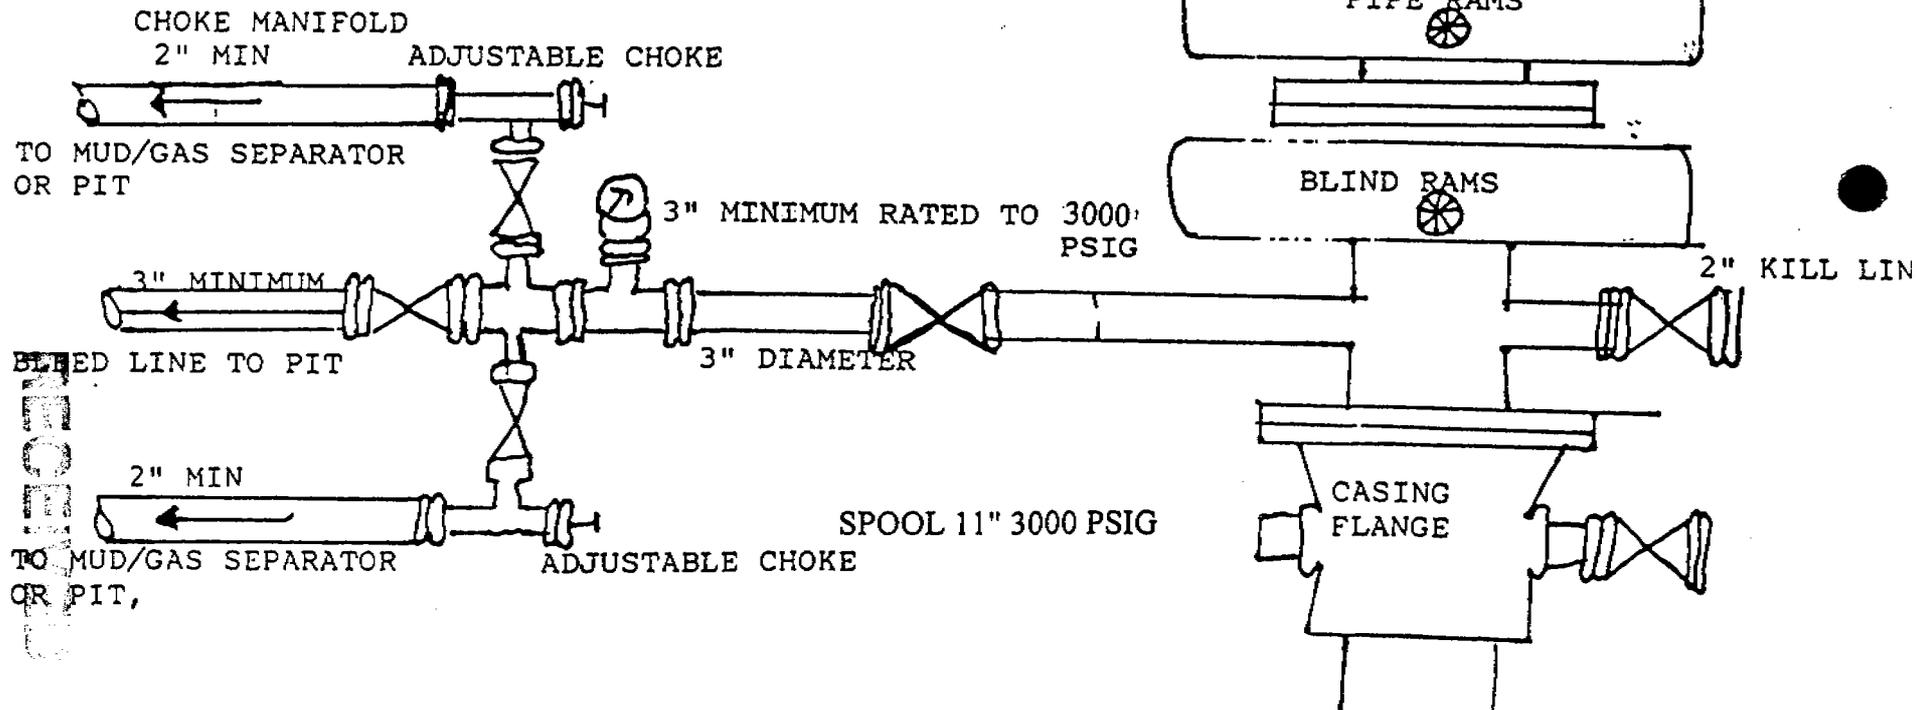

**CONDITIONS OF APPROVAL  
FOR THE SURFACE USE PROGRAM OF THE  
APPLICATION FOR PERMIT TO DRILL**

Company/Operator: Petroglyph Energy, Inc.  
Well Name & Number: Ute Tribal # 19-10  
Lease Number: BIA 14-20-H62-3514  
Location: 1851' FSL & 2011' FEL, NW/SE, Sec. 19, T5S, R3W,  
U.S.B.&M., Duchesne County, Utah  
Surface Ownership: Ute Indian Tribe

**NOTIFICATION REQUIREMENTS**

Location Construction - forty-eight (48) hours prior to construction of location and access roads.

Location Completion - prior to moving on the drilling rig.

Spud Notice: - at least twenty-four (24) hours prior to spudding the well.

Casing String and Cementing - twenty-four (24) hours prior to running casing and cementing all casing strings.

BOP and related Equipment Tests - twenty-four (24) hours prior to running casing and tests.

First Production Notice well - within five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

**RECEIVED**

SEP 08 2000

DIVISION OF  
OIL, GAS AND MINING

## THIRTEEN POINT SURFACE USE PROGRAM

### 1. EXISTING ROADS

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 20.7 miles southwest of Myton, Utah - See attached TOPO Map "A" .
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

### 2. PLANNED ACCESS ROAD

- A. The access road will be approximately 0.4 miles in length. See attached TOPO Map "B".
- B. The access road has a 30 foot ROW w/ 18 foot running surface.
- C. Maximum grade on access road will be 8%.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No culverts, bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

All travel will be confined to existing access road Right-of-Way.

Access roads and surface disturbing activities will conform to standards outlined in

the Bureau of Land Management and Forest Service Publication: Surface Operating Standards For Oil & Gas Exploration and Development, (1989).

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of-Way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of

RECEIVED

SEP 08 2000

drainage ditches by run off water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, Petroglyph Operating Co., Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

3. **LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION**

- A. Water wells - None
- B. Abandoned wells - None
- C. Temporarily abandoned wells - None
- D. Disposal wells - None
- E. Drilling wells - None
- F. Producing wells - 22\*
- G. Shut in wells - None
- H. Injection wells - None

(\*See attached TOPO map "C" for location)

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

A. **ON WELL PAD**

- 1. Tank batteries - None
- 2. Production facilities - To be submitted later
- 3. Oil gathering lines - None
- 4. Gas gathering lines - None
- 5. Injection lines - None
- 6. Disposal lines - None
- 7. Surface pits - None

B. **OFF WELL PAD**

- 1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
- 2. A 41/2" OD steel above ground production pipeline will be laid approximately 1790' from proposed location to a point in the NE/SW of Section 19, T5S, R3W, where it will tie into Petroglyph Operating Co., Inc.'s existing facility at the Ute Tribal #19-11 tank battery. Proposed pipeline crosses Ute Tribe lands, thus a Right-of-Way grant will be required. See attached TOPO Map "D" showing pipeline route.
- 3. Proposed pipeline will be a 4 1/2 " OD steel, welded line laid on the surface.

RECEIVED

SEP 08 2009

4. Protective measures and devices for livestock and wildlife will be taken and/or installed where required.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery, unless more stringent protective requirements are deemed necessary by the authorized officer.

The production facilities will be placed on the Ute Tribal # location.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities required will be painted within 6 months of installation. Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

The required paint color is Desert Brown.

#### 5. LOCATION & TYPE OF WATER SUPPLY

- A. Water supply will be from Target Trucking's Roosevelt Brine Storage and/or Target's water source in SE ¼, Sec. 1, T4S, R5W, Duchesne, Utah (State Water Right #43-10152). All water will come from a non-depletable source.
- B. Water will be hauled by Target Trucking.
- C. No water well will be drilled on lease.

#### 6. SOURCE OF CONSTRUCTION MATERIAL

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of the location.
- B. All construction material will come from Ute Tribal Land.
- C. No mineral materials will be required.

#### 7. METHODS OF HANDLING WASTE DISPOSAL

##### A. METHODS AND LOCATION

1. Cuttings will be confined in the reserve pit.
2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at an approved waste disposal facility.

RECEIVED

SEP 08 2000

4. Produced waste water will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. During the 90 day period, an application for approval of a permanent disposal method and location, together with the required water analysis, will be submitted for the AO's approval.
  5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.
- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit or be removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

Burning of trash will not be allowed. All trash must be contained in a trash cage and hauled away to an approved disposal site at the completion of the drilling activities.

**On BIA administered land:**

All reserve pits will be lined with either native clay, commercial bentonite or plastic sufficient to prevent seepage. (If a plastic nylon reinforced liner is used, it shall be torn and perforated after the pit dries and before backfilling of the reserve pit).

**A 12 mill liner shall be installed in the reserve pit.**

\_\_\_ To protect the environment:

If the reserve pit is lined, the operator will provide the BIA with a chemical analysis of the fluids in that pit no later than 90 days after the well completion to determine the method for final reclamation of the reserve pit. If the elemental concentrations shown by the chemical analysis exceeds the requirements described by Part II, Standards of Quality for Waters of the State, Wastewater Disposal Regulations, State of Utah Division of Health, the contents and liner will be removed and disposed of at an authorized disposal site.

\_\_\_ To protect the environment (without chemical analysis), reserve pits will be constructed so as not to leak, break, or allow discharge of liquids.

\_\_\_ Storage tanks will be used if drill sites are located on tribal irrigable land, flood plains, or on lands under crop production. After first production, produced waste water will be confined to a lined pit or storage tank for a period not to exceed ninety (90) days. During the 90 day period, in accordance with NTL-2B, an application for approval of a permanent disposal method and location, along with required water analysis, shall be

RECEIVED

SEP 08 2003

submitted for the AO's approval. Failure to file an application within the time allowed will be considered an incident of noncompliance.

8. **ANCILLARY FACILITIES**

A. No airstrips or camps are planned for this well.

9. **WELLSITE LAYOUT**

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The reserve pit will be located on the West side of the location. The flare pit will be located downwind of the prevailing wind direction on the West side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled topsoil will be stored on the North end of the location.

Access to the well pad will be from the Southeast.

N/A Diversion ditch(es) shall be constructed on the

\_\_\_\_\_ side of the location (above/below) the cut slope, draining to the \_\_\_\_\_.

N/A Soil compacted earthen berm(s) shall be placed on the

\_\_\_\_\_ side(s) of the location between the \_\_\_\_\_.

N/A The drainage(s) shall be diverted around the sides of the well pad location.

N/A The reserve pit and/or pad locations shall be constructed long and narrow for topographic reasons \_\_\_\_\_.

X Corner #2, 4 & 8 will be rounded off to minimize excavation.

**FENCING REQUIREMENTS:**

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.

RECEIVED

SEP 08 2010

DIVISION OF  
OIL, GAS AND MINING

- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BIA or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is to be regularly traveled. If the well is a producer, the cattleguards (shall/shall not) be permanently mounted on concrete bases. Prior to a new road, crossing any fence located on Tribal land, or any fence between Tribal land and private land, the operator will contact the BIA, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

## **10. PLANS FOR RESTORATION OF SURFACE**

### **A. PRODUCING LOCATION**

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 120 days from the date of well completion (weather permitting). Before any dirt work takes place, the reserve pit will be completely dry and all cans, barrels, pipe, fluid, and hydrocarbons, will be removed.

Contact appropriate surface management agency for required seed mixture.

**RECEIVED**

SEP 08 2009

DIVISION OF  
OIL, GAS AND MINING

**B. DRY HOLE/ABANDONED LOCATION**

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BIA will attach the appropriate surface rehabilitation conditions of approval.

**ON BIA ADMINISTERED LANDS:**

Abandoned well sites, roads, or other disturbed areas will be restored to near their original condition. This procedure will include: (a) reestablishing irrigation systems where applicable, (b) reestablishing soil conditions in irrigated fields in such a way as to ensure cultivation and harvesting of crops and, © ensuring revegetation of the disturbed areas to the specifications of the Ute Indian Tribe or the BIA at the time of abandonment.

**11. SURFACE OWNERSHIP**

Access road: Ute Indian Tribe  
Location: Ute Indian Tribe

**12. OTHER INFORMATION**

A. Petroglyph Operating Co., Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to: -whether the materials appear eligible for the National Register of Historic Places;

-the mitigation measures the operator will likely have to undertake before the site can be used.

-a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

**RECEIVED**

SEP 06 2010

DIVISION OF  
OIL, GAS AND MINING

- B. As operator, Petroglyph Operating Co., Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BIA, or the appropriate County Extension Office. On BIA administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.
- C. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on Tribal Lands after the conclusion of drilling operations or at any other time without BIA authorization. However, if BIA authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities.

**On BIA administered land:**

Operator's employees, including subcontractors, will not gather firewood along roads constructed by operators. If wood cutting is required, a permit will be obtained from the Forestry Department of the BIA pursuant to 25 CFR 169.13 "Assessed Damages Incident to Right-of-Way authorization". All operators, subcontractors, vendors, and their employees or agents may not disturb saleable timber (including firewood) without a duly granted wood permit from the BIA Forester.

If the surface rights are owned by the Ute Indian Tribe and mineral rights are owned by another entity, an approved right-of-way will be obtained from the BIA before the operator begins any construction activities. If the surface is owned by another entity and the mineral rights are owned by the Ute Indian Tribe, rights-of-way will be obtained from the other entity.

All roads constructed by operators on the Uintah and Ouray Indian Reservation will have appropriate signs. Signs will be neat and of sound construction. They will state: (a) that the land is owned by the Ute Indian Tribe, (b) the name of the operator, (c) that firearms are prohibited to all non-Ute Tribal members, (d) that permits must be obtained from the BIA before cutting firewood or other timber products, and (e) only authorized personnel permitted. All well site locations on the Uintah and Ouray Indian Reservation will have an appropriate sign indicating the name of the operator, the lease serial number, the well name and number, the survey description of the well (either footage or the quarter-quarter section, the section, township, and range).

RECEIVED

SEP 08 2003

DIVISION OF  
OIL, GAS AND MINING

**Additional Surface Stipulations**

N/A No construction or drilling activities shall be conducted between

\_\_\_\_\_ and \_\_\_\_\_ because of \_\_\_\_\_.

N/A No surface occupancy will be allowed within 1,000 feet of any sage grouse strutting ground.

N/A No construction or exploration activities are permitted within a 1.5 mile radius of sage grouse strutting grounds from April 1 to June 30.

N/A There shall be no surface disturbance within 600 feet of live water (includes stock tanks, springs, and guzzlers).

N/A No cottonwood trees will be removed or damaged.

N/A Pond will be constructed according to BIA specifications approximately \_\_\_\_\_ feet \_\_\_\_\_ of the location, as flagged on the onsite.

**LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION**

**PERMITTING**

Ed Trotter  
P.O. Box 1910  
Vernal, UT 84078  
Telephone: (435)789-4120  
Fax: (435)789-1420

**OPERATIONS**

Vince Guinn  
P.O. Box 607  
Roosevelt, UT 84066  
(435)722-2531  
(435)722-9145

All lease or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. Petroglyph Operating Co., Inc. is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.

The BIA office shall be notified upon site completion prior to moving on the drilling rig.

**RECEIVED**

SEP 08 2000

DIVISION OF  
OIL, GAS AND MINING

**Certification**

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions that presently exist; that the statements made in the Plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Petroglyph Operating Co., Inc. and its contractors and subcontractors in conformity with this Plan and the terms and conditions under which it is approved.

8-14-2000  
Date

*John L. ...*  
Agent

RECEIVED  
SEP 08 2000  
DIVISION OF  
OIL, GAS AND MINING

# PETROGLYPH OPERATING CO., INC.

UTE TRIBAL #19-10  
LOCATED IN DUCHESNE COUNTY, UTAH  
SECTION 19, T5S, R3W, U.S.B.&M.



PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHEASTERLY

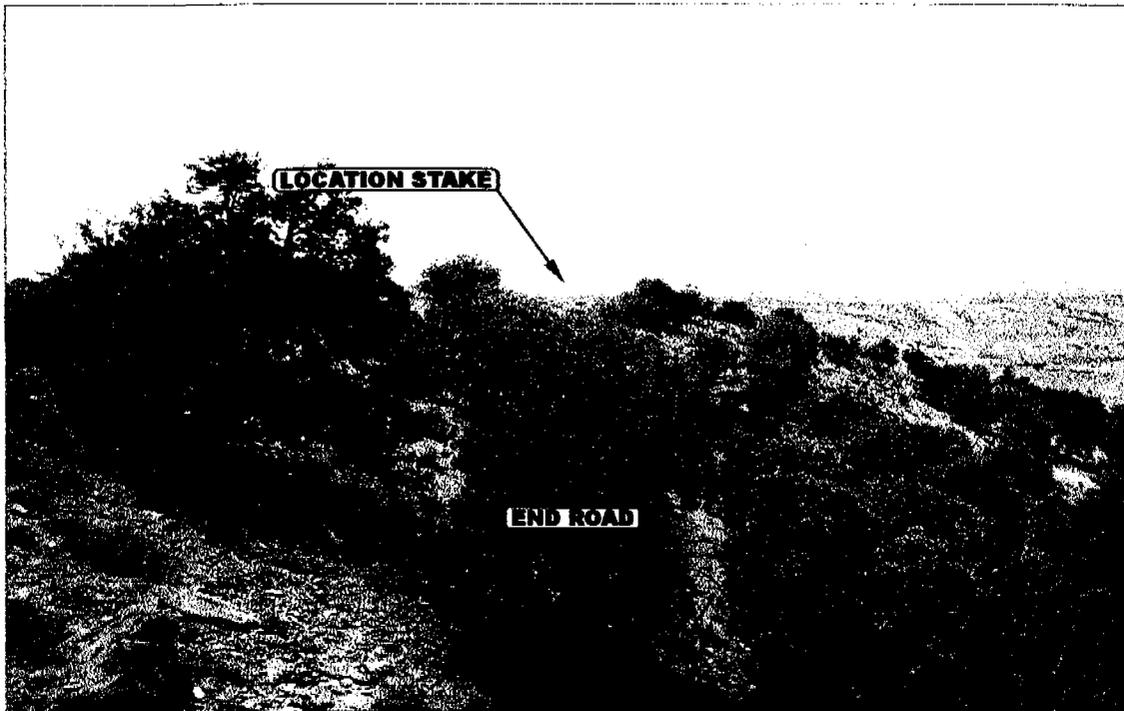


PHOTO: VIEW FROM END OF PROPOSED ROAD

CAMERA ANGLE: NORTHWESTERLY



**UELS** Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
435-789-1017 uels@uelsinc.com


- Since 1964 -

LOCATION PHOTOS	6	2	00	PHOTO
	MONTH	DAY	YEAR	
TAKEN BY: G.S.	DRAWN BY: J.L.G.	REVISED: 00-00-00		

# PETROGLYPH OPERATING CO., INC.

## LOCATION LAYOUT FOR

UTE TRIBAL #19-10  
SECTION 19, T5S, R3W, U.S.B.&M.  
1851' FSL 2011' FEL

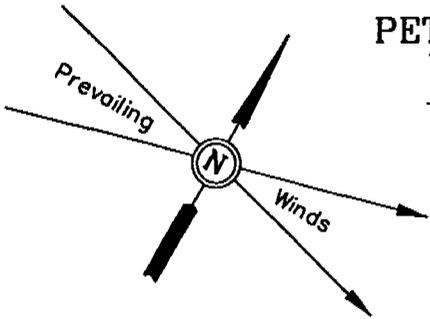

SCALE: 1" = 50'  
DATE: 6-15-00  
Drawn By: C.B.T.

**NOTE:**

Flare Pit is to be located a min. of 100' from the Well Head.

Approx. Top of Cut Slope

FLARE PIT




El. 383.2  
**C-7.1'**  
(btm. pit)

NOTE:  
Pit Capacity w/2' of Freeboard is ±4,600 Bbls.

**C-25.8'**  
El. 409.9'

10' WIDE BENCH/DIKE

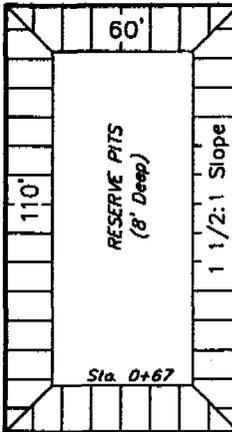

Sta. 0+67

El. 378.6'  
**C-2.5'**  
(btm. pit)

El. 410.5'  
**C-26.4'**

El. 408.0'  
**C-23.9'**

Reserve Pit Backfill & Spoils Stockpile


**F-0.8'**  
El. 383.3'

**C-14.3'**  
El. 398.4'

**F-21.3'**  
El. 362.8'

Sta. 2+90

Approx. Toe of Fill Slope

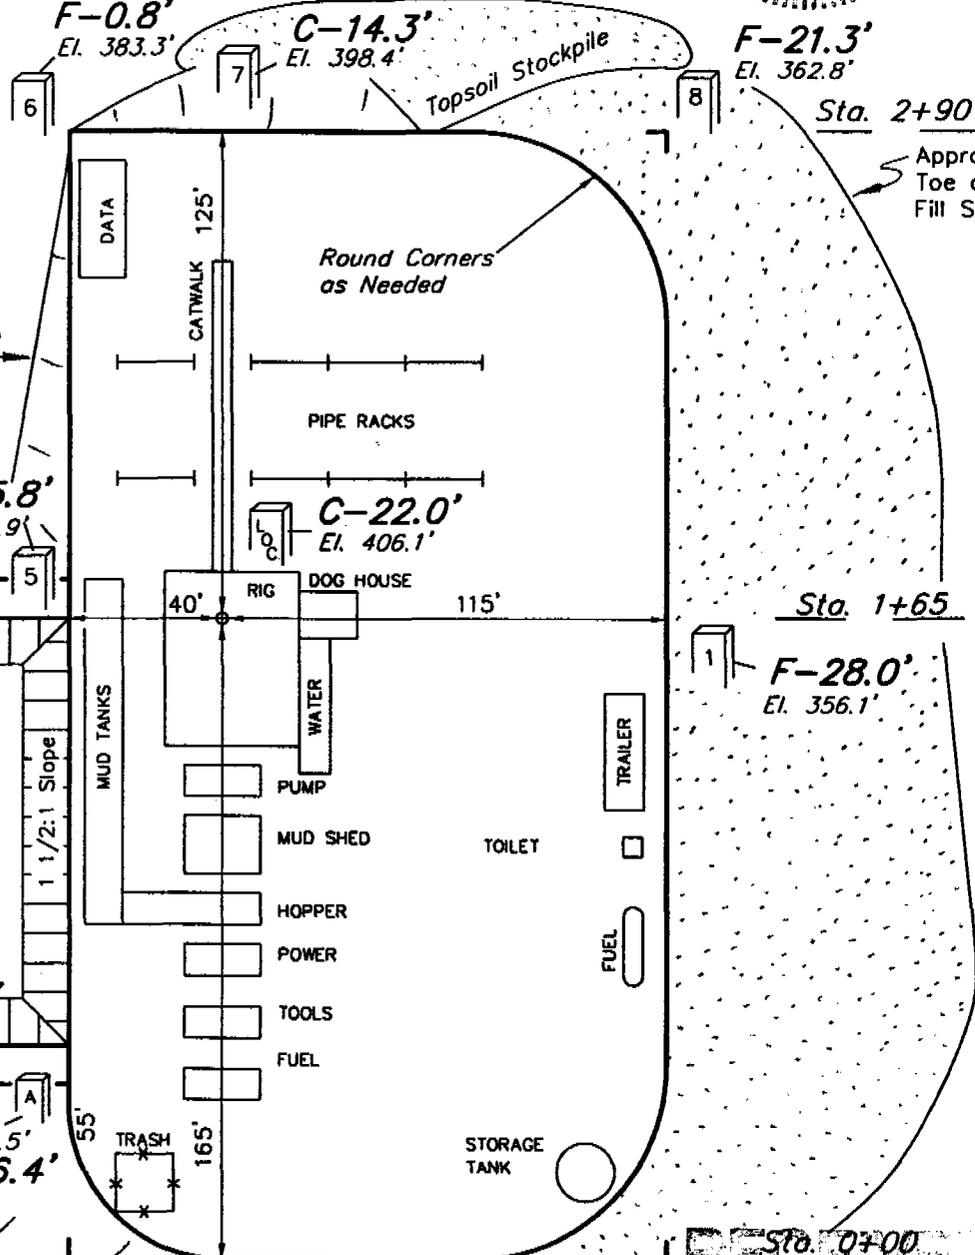

Sta. 1+65

**F-28.0'**  
El. 356.1'

Sta. 0+00

**F-18.2'**  
El. 365.9'

DIVISION OF OIL, GAS AND MINING

Proposed Access Road

Elev. Ungraded Ground at Location Stake = 6406.1'

Elev. Graded Ground at Location Stake = 6384.1'

UINTAH ENGINEERING & LAND SURVEYING  
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017


# PETROGLYPH OPERATING CO., INC.

## TYPICAL CROSS SECTIONS FOR

UTE TRIBAL #19-10  
SECTION 19, T5S, R3W, U.S.B.&M.  
1851' FSL 2011' FEL

1" = 20'  
X-Section  
Scale  
1" = 50'

DATE: 6-15-00  
Drawn By: C.B.T.

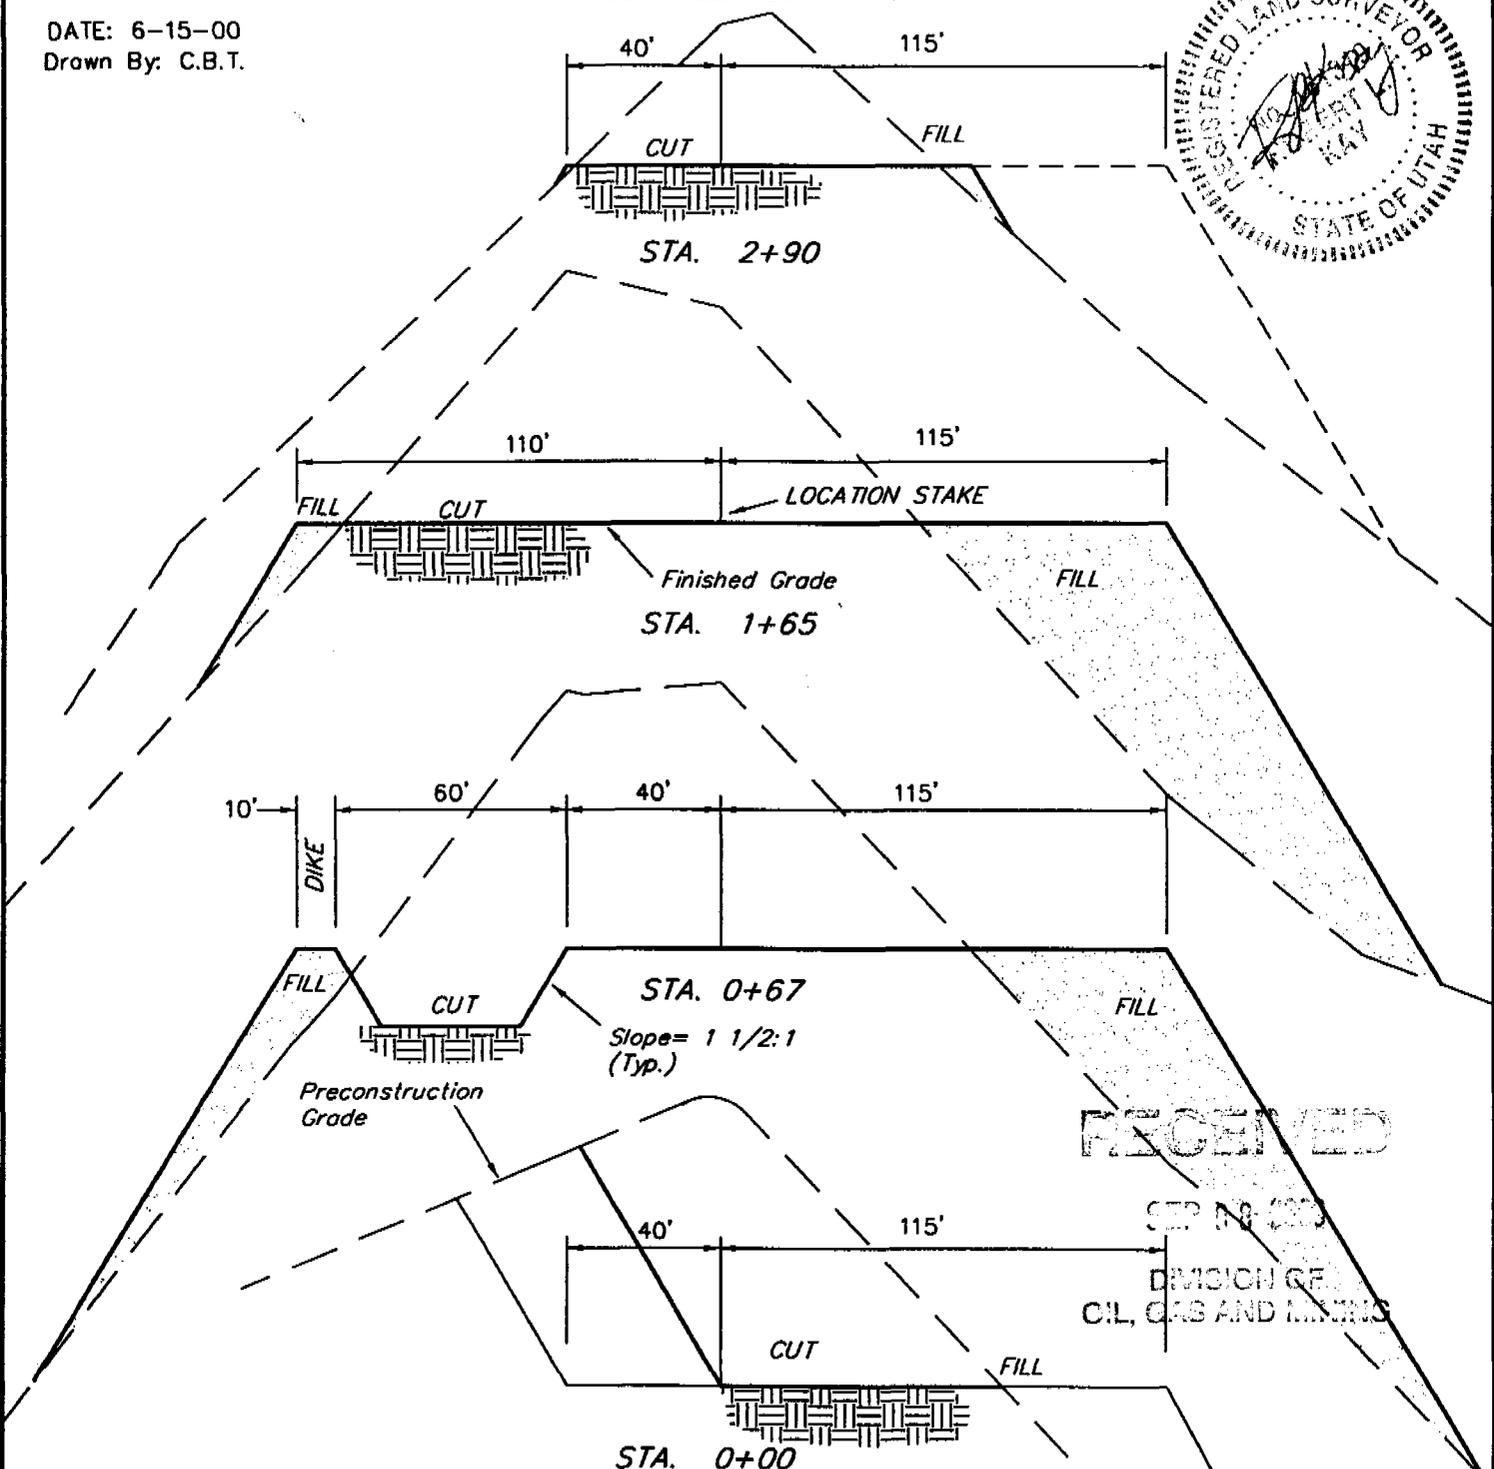


RECEIVED  
SEP 18 2000  
DIVISION OF  
OIL, GAS AND MINING

### APPROXIMATE YARDAGES

(12") Topsoil Stripping	=	1,910 Cu. Yds.
Remaining Location	=	21,390 Cu. Yds.
<b>TOTAL CUT</b>	<b>=</b>	<b>23,300 CU.YDS.</b>
<b>FILL</b>	<b>=</b>	<b>19,660 CU.YDS.</b>

EXCESS MATERIAL AFTER 5% COMPACTION	=	2,610 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	=	2,610 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	=	0 Cu. Yds.

**UINTAH ENGINEERING & LAND SURVEYING**  
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017

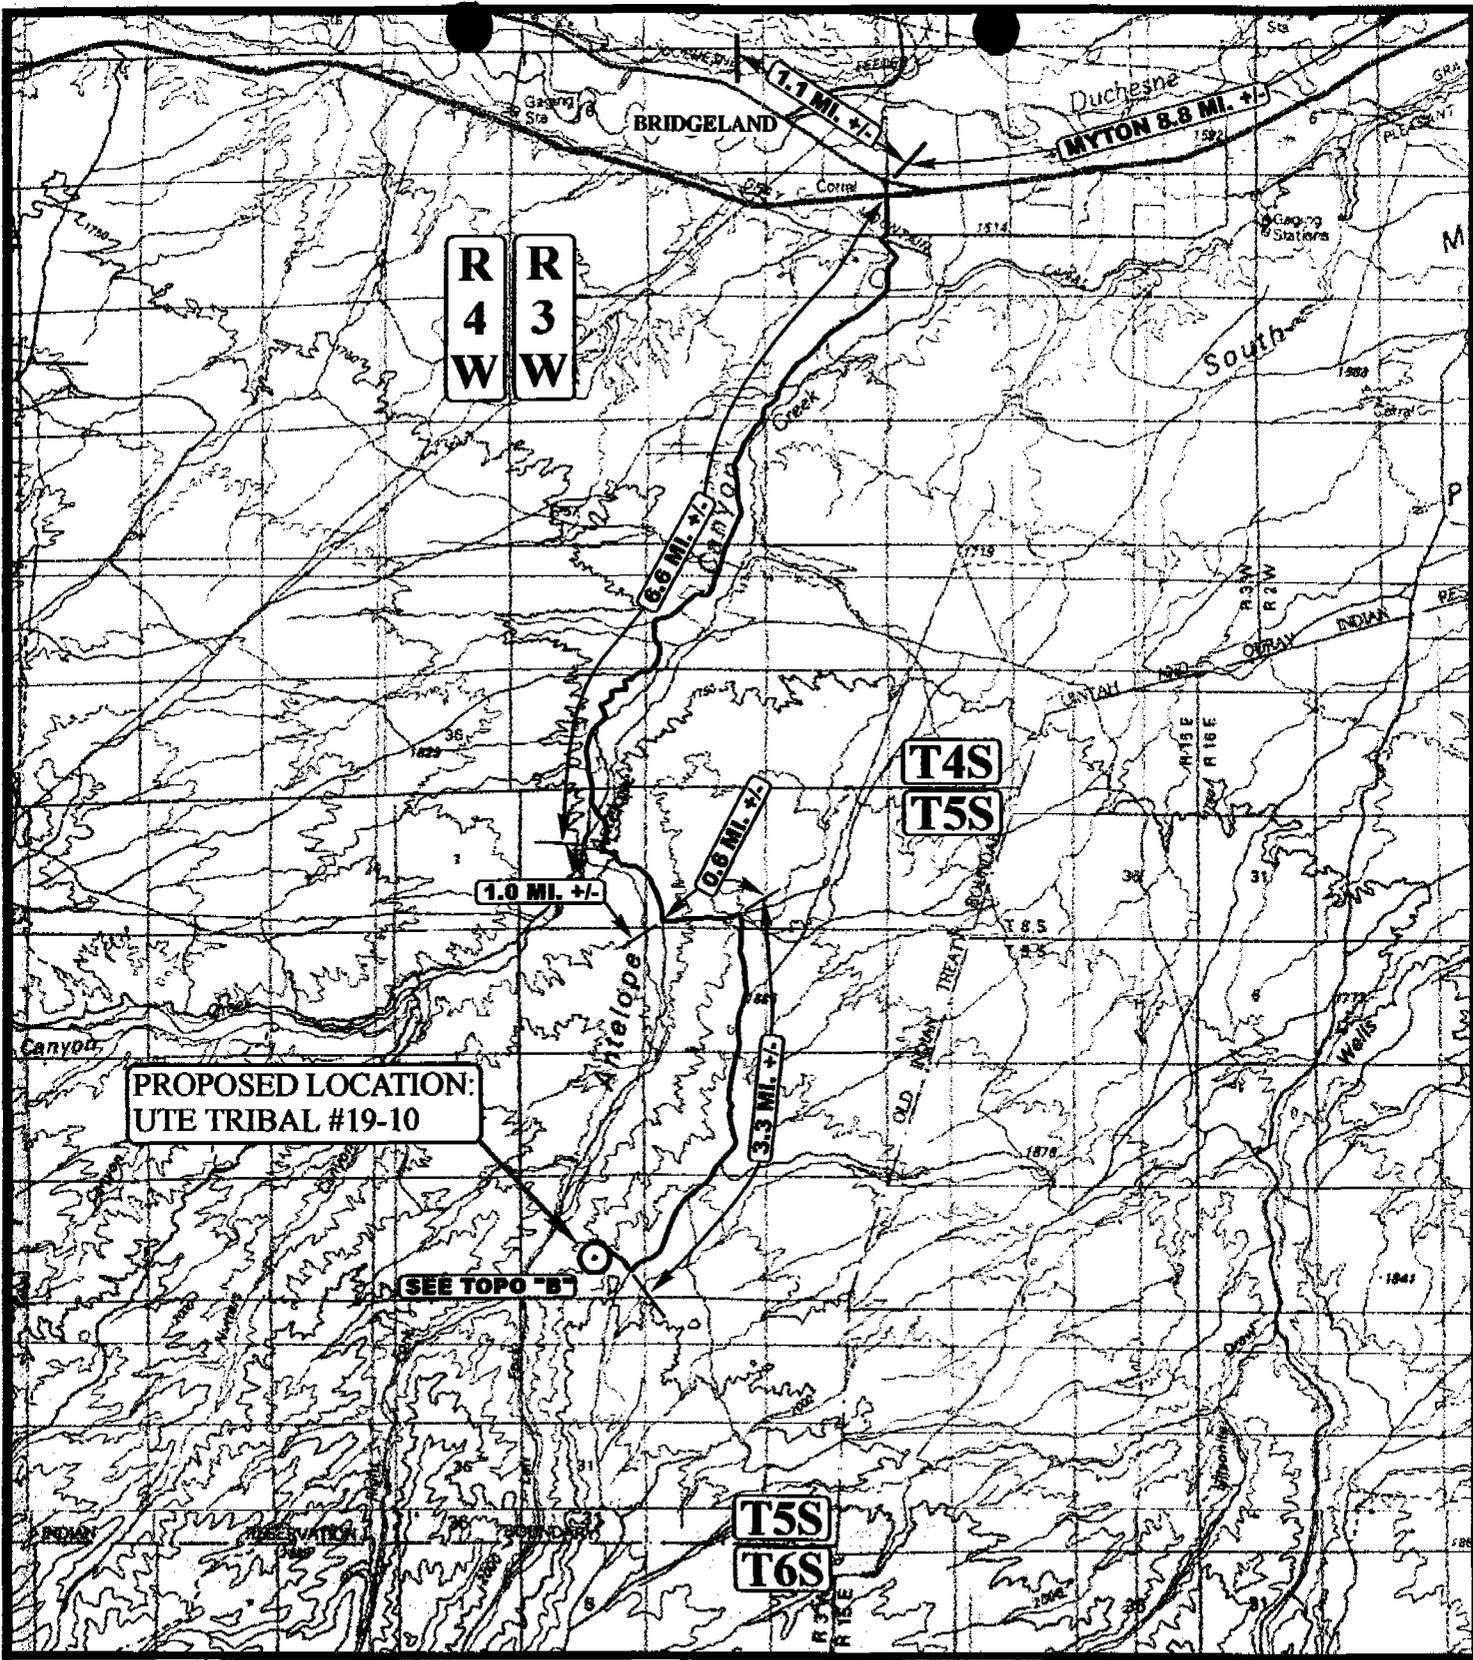

**LEGEND:**

○ PROPOSED LOCATION

N

**PETROGLYPH OPERATING CO., INC.**

**UTE TRIBAL #19-10**  
**SECTION 19, T5S, R3W, U.S.B.&M.**  
**1851' FSL 2011' FEL**



**Uintah Engineering & Land Surveying**  
 85 South 200 East Vernal, Utah 84078  
 (435) 789-1017 \* FAX (435) 789-1813



**TOPOGRAPHIC**  
**MAP**

**6** MONTH  
**2** DAY  
**00** YEAR

SCALE: 1:100,000 DRAWN BY: J.L.G. REVISED: 00-00-00



T5S

BRIDGELAND 12.6 MI. +/-  
MYTON 20.3 MI. +/-

PROPOSED LOCATION:  
UTE TRIBAL #19-10

PROPOSED  
ACCESS 0.4 MI. +/-

R  
4  
W  
R  
3  
W

**LEGEND:**

- - - - - PROPOSED ACCESS ROAD
- EXISTING ROAD



**PETROGLYPH OPERATING CO., INC.**

UTE TRIBAL #19-10  
SECTION 19, T5S, R3W, U.S.B.&M.  
1851' FSL 2011' FEL




Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813  
Email: uels@easilink.com

**TOPOGRAPHIC  
MAP**

**6 2 00**  
MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: I.L.G. REVISED: 00-00-00

**B**  
TOPO

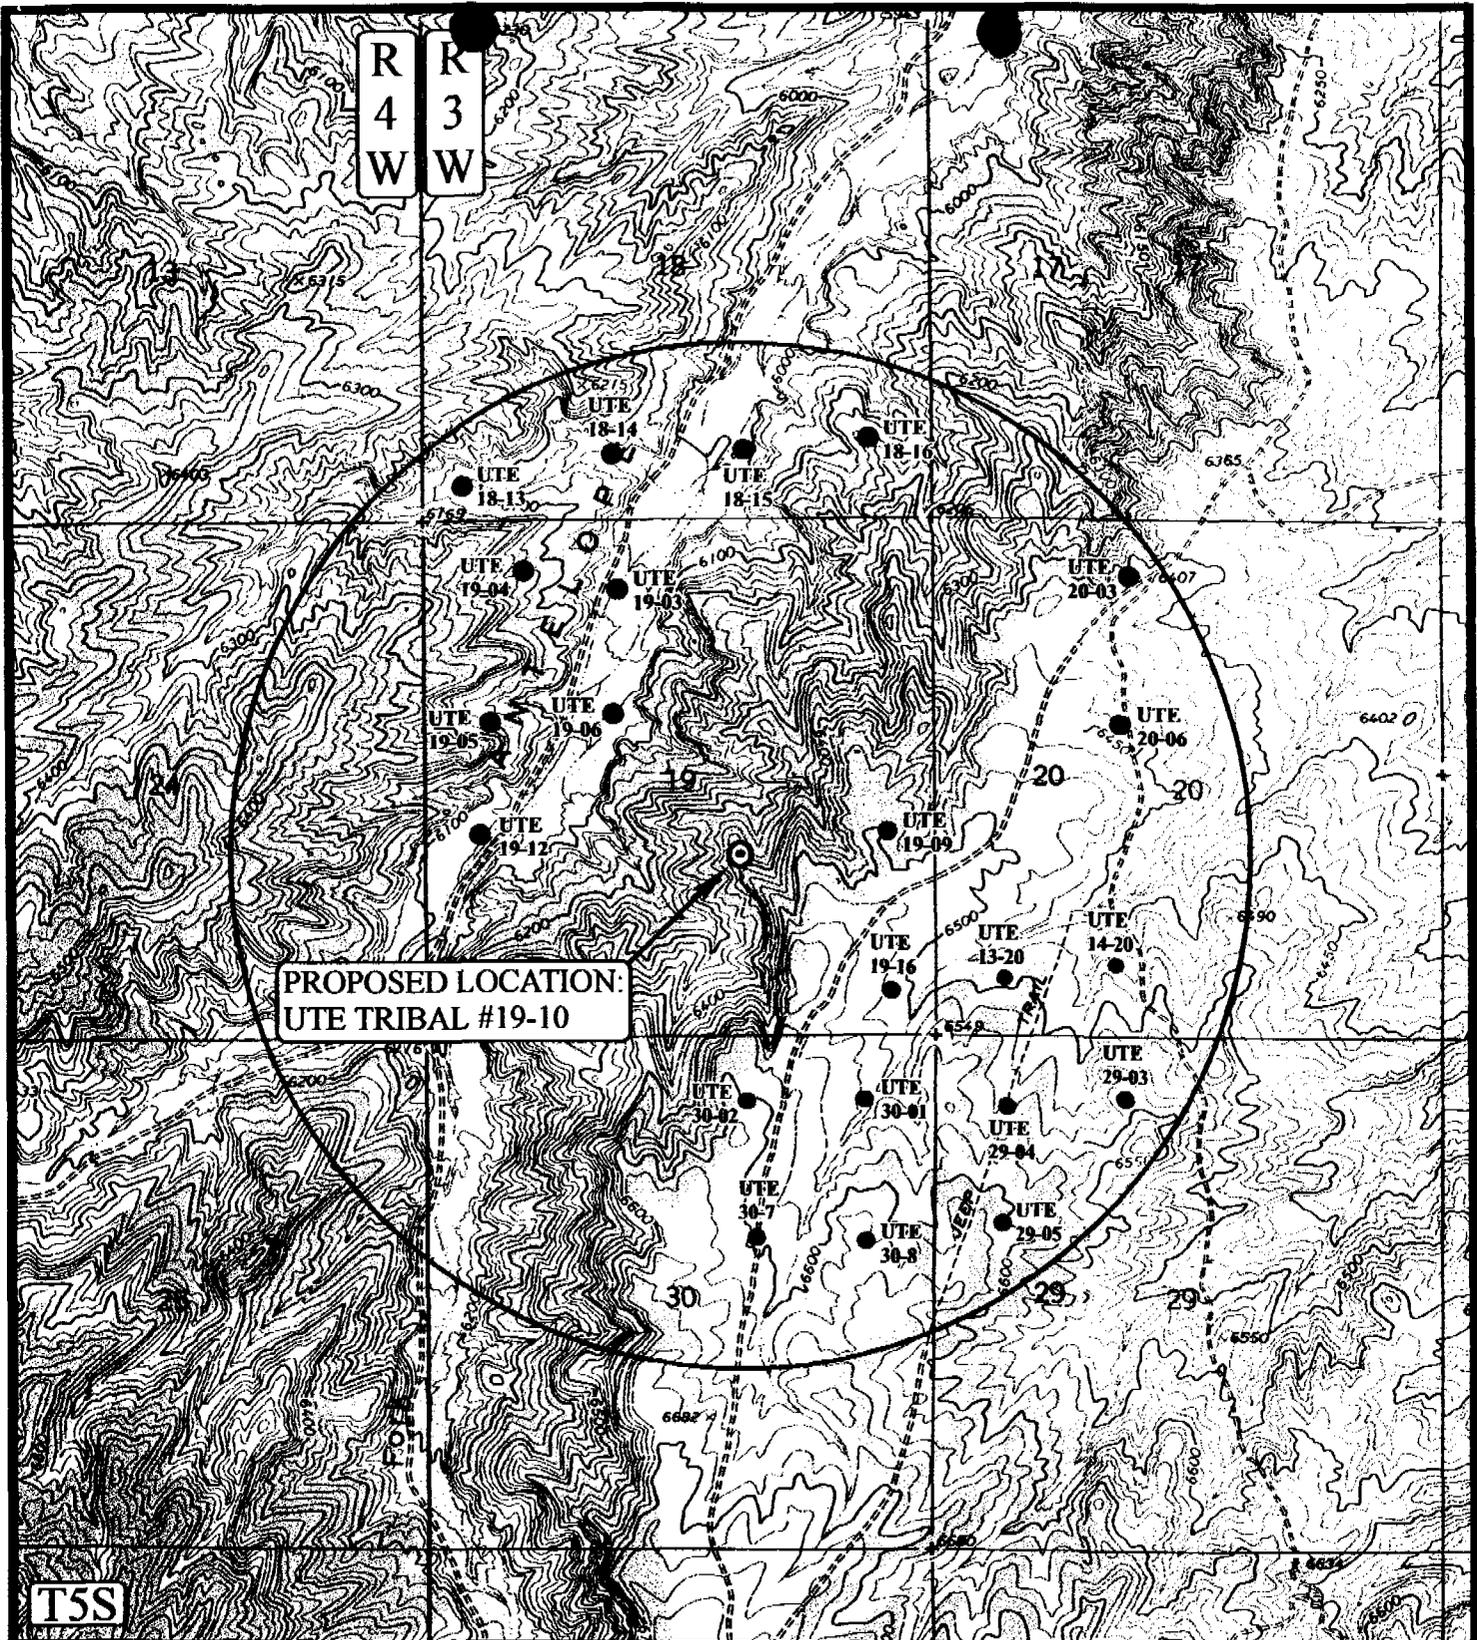

PROPOSED LOCATION:  
UTE TRIBAL #19-10

T5S

**LEGEND:**

- DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED

**PETROGLYPH OPERATING CO., INC.**

UTE TRIBAL #19-10  
SECTION 19, T5S, R3W, U.S.B.&M.  
1851' FSL 2011' FEL




Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813  
Email: uels@easilink.com

TOPOGRAPHIC  
MAP

6	2	00
MONTH	DAY	YEAR

SCALE: 1" = 2000' DRAWN BY: J.L.G. REVISED: 00-00-00



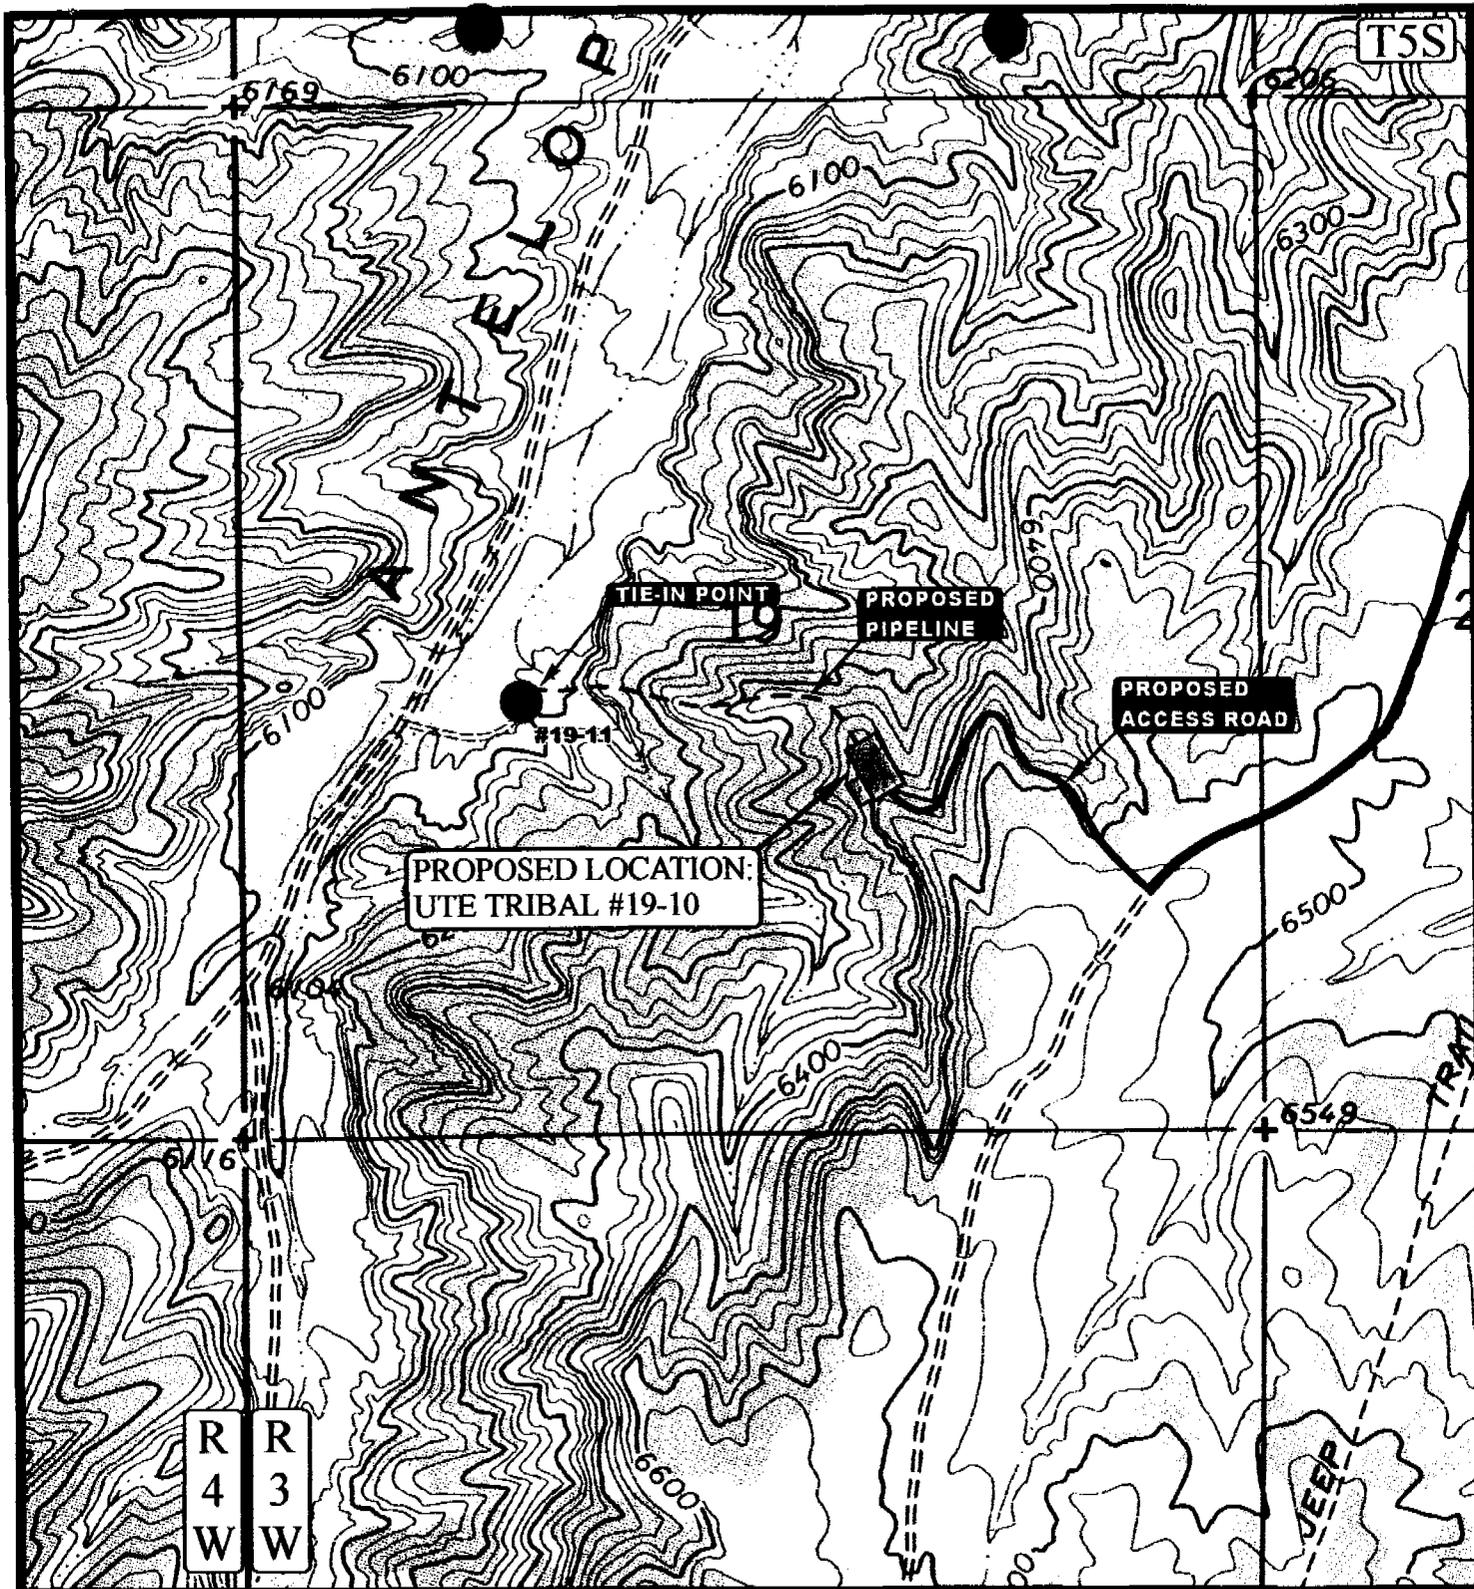

APPROXIMATE TOTAL PIPELINE DISTANCE = 1790' +/-

**LEGEND:**

- EXISTING PIPELINE
- PROPOSED PIPELINE
- PROPOSED ACCESS

N



**PETROGLYPH OPERATING CO., INC.**

UTE TRIBAL #19-10  
SECTION 19, T5S, R3W, U.S.B.&M.  
1851' FSL 2011' FEL



Uintah Engineering & Land Surveying  
85 South 200 East Vernal, Utah 84078  
(435) 789-1017 \* FAX (435) 789-1813  
Email: uels@easilink.com

TOPOGRAPHIC  
MAP

6 2 00  
MONTH DAY YEAR



SCALE: 1" = 1000' DRAWN BY: J.L.G. REVISED: 00-00-00

**WORKSHEET  
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 09/08/2000

API NO. ASSIGNED: 43-013-32182
--------------------------------

WELL NAME: UTE TRIBAL 19-10  
 OPERATOR: PETROGLYPH OPERATING CO ( N3800 )  
 CONTACT: ED TROTTER, AGENT

PHONE NUMBER: 435-789-4120

PROPOSED LOCATION:  
 NWSE 19 050S 030W  
 SURFACE: 1851 FSL 2011 FEL  
 BOTTOM: 1851 FSL 2011 FEL  
 DUCHESNE  
 ANTELOPE CREEK ( 60 )

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 2-Indian  
 LEASE NUMBER: 14-20-H62-3514  
 SURFACE OWNER: 2-Indian

PROPOSED FORMATION: DGCRK

RECEIVED AND/OR REVIEWED:

Plat  
 Bond: Fed[] Ind[2] Sta[] Fee[]  
 (No. BO4556 )

Potash (Y/N)  
 Oil Shale (Y/N) \*190 - 5 (B)  
 Water Permit  
 (No. 43-10152 )

RDCC Review (Y/N)  
 (Date: \_\_\_\_\_ )

Fee Surf Agreement (Y/N)

LOCATION AND SITING: \*Enh. Rec. Project.


R649-2-3. Unit Antelope Creek  
 R649-3-2. General  
 Siting: \_\_\_\_\_  
 R649-3-3. Exception  
 Drilling Unit  
 Board Cause No: 214-2  
 Eff Date: 6-9-2000  
 Siting: \* Per PoD

R649-3-11. Directional Drill

COMMENTS: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

STIPULATIONS: ① FEDERAL APPROVAL

\_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

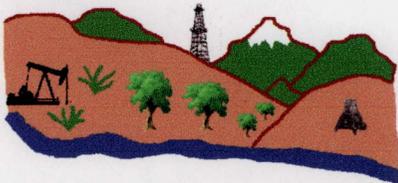


Utah Oil Gas and Mining

OPERATOR: PETROGLYPH ENERGY (N3800)

FIELD: ANTELOPE CREEK (060)

SEC. 19, T5S, R3W

COUNTY: DUCHESNE UNIT: ANTELOPE CREEK  
CAUSE: 214-2

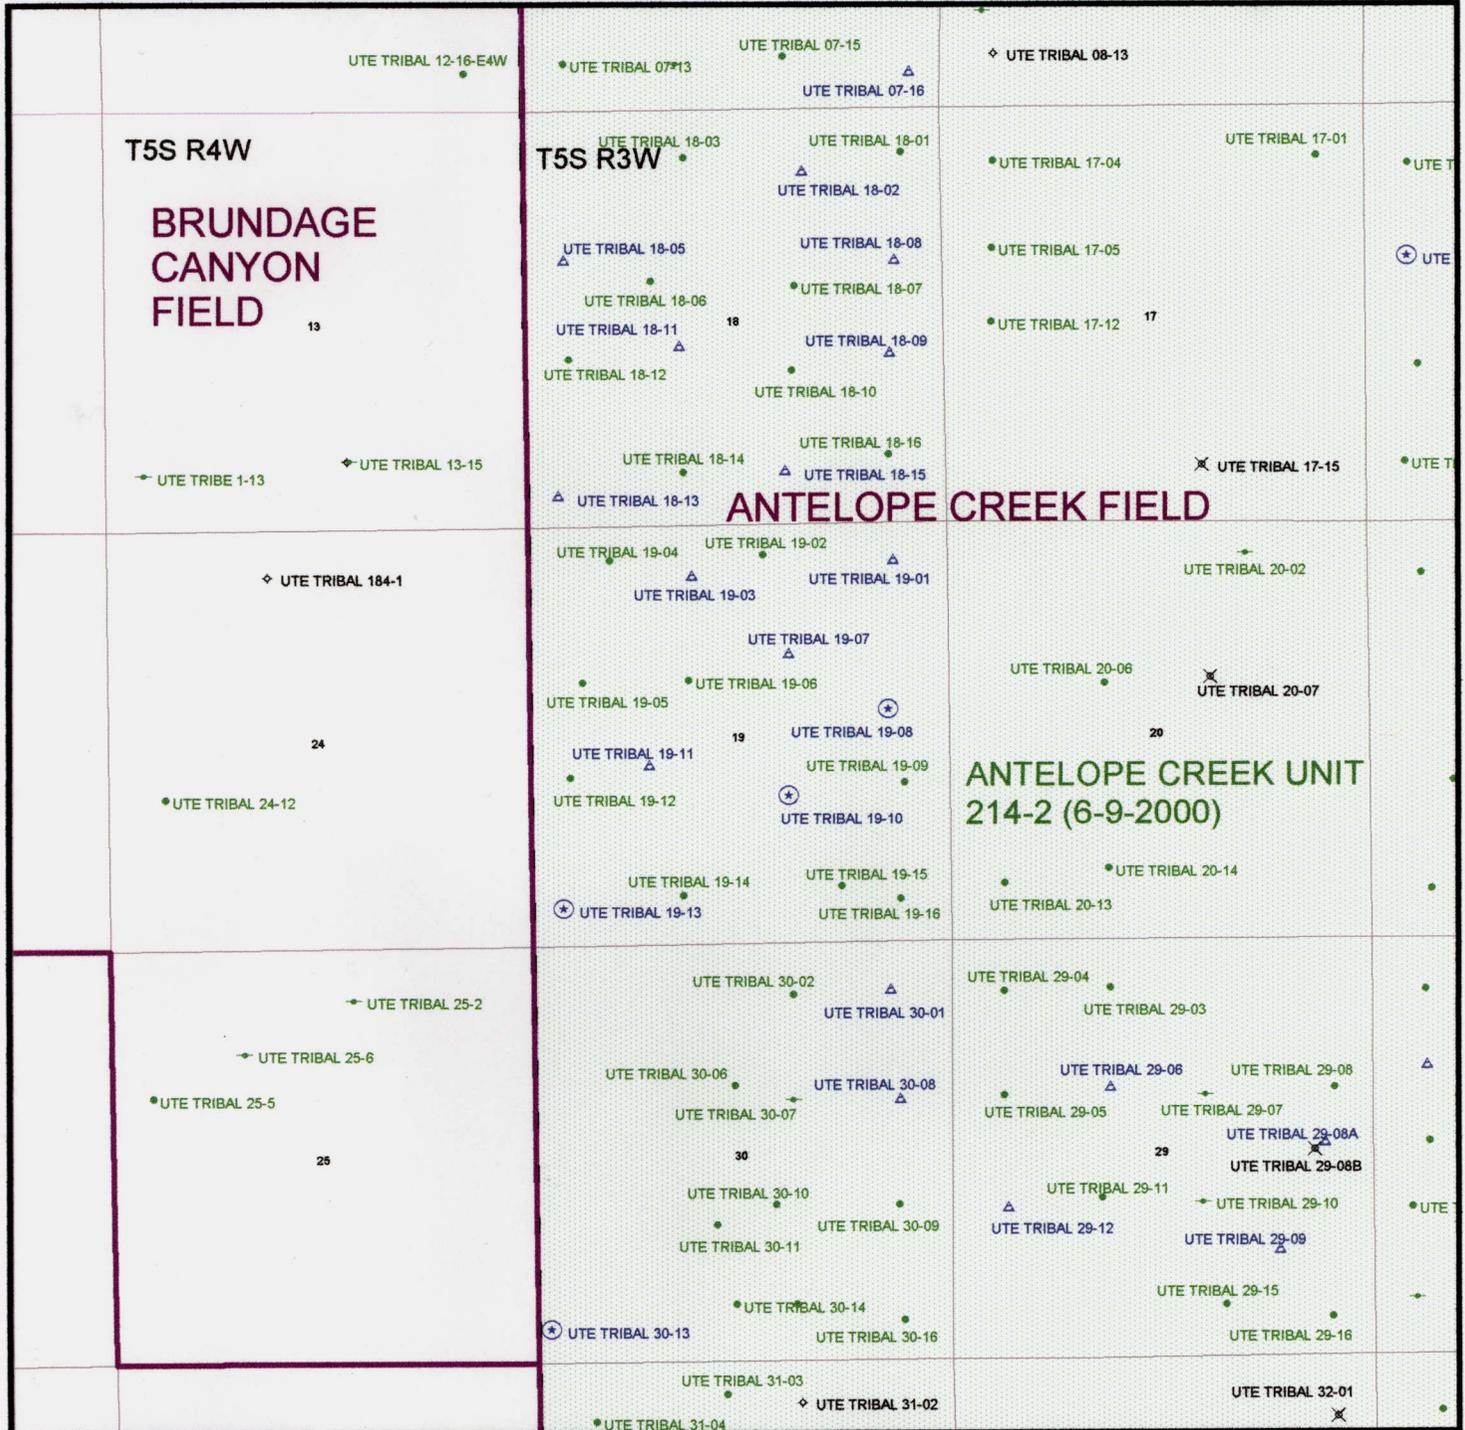



State of Utah  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt  
Governor

Kathleen Clarke  
Executive Director

Lowell P. Braxton  
Division Director

1594 West North Temple, Suite 1210

PO Box 145801

Salt Lake City, Utah 84114-5801

801-538-5340

801-359-3940 (Fax)

801-538-7223 (TDD)

September 18, 2000

Petroglyph Energy, Inc.  
PO Box 607  
Roosevelt, UT 84066


Re: Ute Tribal 19-10 Well, 1851' FSL, 2011' FEL, NW SE, Sec. 19, T. 5 South,  
R. 3 West, Duchesne County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-013-32182.

Sincerely,

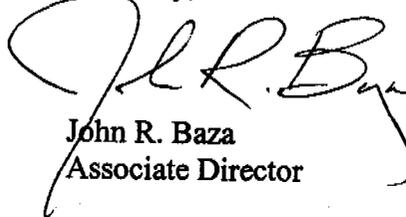

John R. Baza  
Associate Director

cc:

Enclosures

Duchesne County Assessor  
Bureau of Land Management, Vernal District Office

**Operator:** Petroglyph Energy, Inc.  
**Well Name & Number** Ute Tribal 19-10  
**API Number:** 43-013-32182  
**Lease:** BIA-14-20-H62-3514

**Location:** NW SE      **Sec.** 19      **T.** 5 South      **R.** 3 West

### Conditions of Approval

**1. General**

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

**2. Notification Requirements**

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338
- Contact Robert Krueger at (801) 538-5274.

**3. Reporting Requirements**

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

**4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.**

**UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT**

**APPLICATION FOR PERMIT TO DRILL OR DEEPEN**

1a. TYPE OF WORK  
**DRILL**       **DEEPEN**

b. TYPE OF WELL  
Oil       Gas       Single       Multiple   
Well       Well       Zone       Zone

2. Name of Operator  
**PETROGLYPH ENERGY, INC.**

3. Address and Telephone Number  
**P.O. BOX 607, ROOSEVELT, UT 84066 (435) 722-2531**

4. Location of Well (Report location clearly and in accordance with any State requirements.)  
At surface      **1851' FSL & 2011' FEL NW/SE RECEIVED**  
At proposed prod. Zone

14. Distance in miles and direction from nearest town or post office      **SEP - 5 2000**  
**20.7 MILES SOUTHWEST OF MYTON, UTAH**

15. Distance from proposed location to nearest property or lease line, ft.      **1851'**  
(Also to nearest drig. Unit line, if any)

16. No. of acres in lease      **640**

17. No. of acres assigned to this well      **40**

18. Distance from proposed location to nearest well, drilling, completed, or applied for, on this lease, ft.

19. Proposed depth      **6273'**

20. Rotary or cable tools      **ROTARY**

21. Elevations (show whether DF, RT, GR, etc.)  
**6384 FEET GRADED GROUND**

22. Approx. date work will start  
**OCTOBER 2000**

5. Lease designation and serial number  
**BIA-14-20-H62-3514**

6. If Indian, Allottee or Tribe name  
**UTE TRIBAL LAND**

7. Unit Agreement Name

8. Farm or lease name, well no.  
**UTE TRIBAL**

9. API Well No.  
**UT 19-10**

10. Field and pool, or wildcat  
**ANTELOPE CREEK**

11. Sec., T., R., M., or BLK. and survey or area  
**SEC. 19, T5S, R3W**

12. County or parish      **UINTAH**      13. State      **UTAH**

23. **PROPOSED CASING AND CEMENTING PROGRAM**

SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4"	8 5/8"	24#	250'	135 SX CLASS "G" + 2% CaCl2 + 1/4 #/SX CELLOFLAKE.
7 7/8"	5 1/2"	15.50#	6273'	50/50 POXMIX + 2% GEL + 10% SALT TO 400' ABOVE ALL ZONES OF INTEREST (+10% EXCESS). LIGHT CEMENT (11PPG+) + LCM TO 200' ABOVE OIL SHALE OR FRESH WATER INTERVALS (+ 5% EXCESS).

SEE ATTACHMENTS FOR:

- 8 POINT PLAN
- BOP SCHEMATIC
- SURFACE USE AND OPERATING PLAN
- LOCATION PLAT
- LOCATION LAYOUT
- TOPOGRAPHIC MAPS "A", "B", C AND "D"

**CONFIDENTIAL**

DIVISION OF  
OIL, GAS AND MINING

**EOG RESOURCES, INC. WILL BE THE DESIGNATED OPERATOR OF THE SUBJECT WELL UNDER BOND #BO 4556.**

Pc: UTAH DIVISION OF OIL, GAS, AND MINING  
BUREAU OF INDIAN AFFAIRS, FORT DUCHESNE, UTAH

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

SIGNED *Ed L. J. [Signature]* TITLE Agent DATE 7-14-2000

(This space for Federal or State office use)

PERMIT NO. \_\_\_\_\_ APPROVAL DATE \_\_\_\_\_

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

CONDITIONS OF APPROVAL, IF ANY

APPROVED BY *[Signature]* TITLE Assistant Field Manager Mineral Resources DATE 10/19/00

**NOTICE OF APPROVAL**

**CONDITIONS OF APPROVAL ATTACHED**

00P50585H

CONDITIONS OF APPROVAL  
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Petroglyph Operating Company Inc.

Well Name & Number: Ute Tribal 19-10

API Number: 43-013-32182

Lease Number: 14-20-H62-3514

Location: NWSE Sec. 19 T.05S R. 03W

Agreement: 14-20-H62-4650

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

RECEIVED  
Ute Tribal  
14-20-H62-4650

## CONDITIONS OF APPROVAL FOR NOTICE TO DRILL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

### A. DRILLING PROGRAM

#### 1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands to Tim Ingwell of this office **prior to setting the next casing string or requesting plugging orders**. Faxed copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

#### 2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of Onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., for a **2M** system and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

If an air compressor is on location and is being utilized to provide air for the drilling medium while drilling, the special drilling requirements in Onshore Oil and Gas Order No. 2, regarding air or gas drilling shall be adhered to. If a mist system is being utilized then the requirement for a deduster shall be waived.

#### 3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint. Surface casing setting depths are based on ground level elevations only.

As a minimum, the usable water shall be isolated and/or protected by having a cement top for the production casing at least 200 ft. above the base of the usable water zone, identified at 245 ft. If gilsonite is encountered while drilling, it shall be isolated and/or protected via the cementing program.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

All Drill Stem tests (DST) shall be accomplished during daylight hours, unless specific approval to start during other hours is obtained from the AO. However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e., lighting which is adequate for visibility and vapor proof for safe operations). Packers can be released, but tripping should not begin before daylight unless prior approval is obtained from the AO.

A cement bond log (CBL) will be run from the production casing shoe to top of the cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. Two copies of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the AO.

6. Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Such notification will be sent by telegram or other written communication, not later than five (5) days following the date on which the well is placed on production.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-5(d) shall be submitted to the appropriate Field Office within 60 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (1).

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within thirty (30) days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the AO.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries and tested for meter accuracy at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, contact one of the following individuals:

Ed Forsman (435) 789-7077  
Petroleum Engineer (435) 646-1685 (PAGER)

Jerry Kenzcka (435) 781-1190  
Petroleum Engineer

BLM FAX Machine (435) 781-4410

RECEIVED  
OCT 19 1990  
BLM DISTRICT OFFICE  
VERNAL, UTAH

## EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids.

## **SURFACE CONDITIONS OF APPROVAL**

75 foot wide corridor right-of-ways shall be granted for the project. The corridor will have an access road with 30 feet width allocated for the access road and the additional 45 feet for various surface and/or buried flowlines in it. Upon completion of each ROW being incorporated for well site use an as built description will be immediately filed with the Ute Tribe.

The Ute Tribe Energy and Mineral Department is to be notified in writing 48 hours in advance of any construction activity. The Ute Tribal office days are Monday through Thursday. A Tribal Technician is to routinely monitor construction. For all monitoring that is to exceed Tribal Technician regular working hours, EOG Resources shall make arrangements with the Ute Energy and Minerals Department.

For any deviations of submitted APD's and ROW applications, Petroglyph Energy will notify the Ute Tribe and Bureau of Indian Affairs in writing and will receive written authorization of such changes. Without authorization, Petroglyph Energy understands they will be subject to fines and penalties.

Petroglyph Energy will assure the Ute Tribe that any/all contractors and subcontractors have acquired a 2000 Tribal Business License and have "Year 2000 Access Permits" prior to construction. Contractors and subcontractors will have these permits in vehicles at all times.

All Petroglyph Energy employees and/or authorized personnel (subcontractors) in the field will have approved applicable APD's and/or ROW permits/authorizations on their person(s) during all phases of construction.

Petroglyph Energy will implement the "Safety and Emergency Plan". Petroglyph Energy will ensure its compliance.

All vehicular traffic, personnel movement, construction, and restoration activities shall be confined to the areas examined and approved, and to the existing roadways and/or evaluated access routes.

All personnel shall refrain from collecting artifacts, any paleontological fossils, and from disturbing any significant cultural resources in the area.

The personnel from the Ute Tribe Energy & Mineral Department shall be consulted if cultural remains (including paleontology fossils) from subsurface deposits are exposed or identified during construction. All construction will cease. Prior to commencing constructing in the area where cultural resources are exposed the operator must obtain authorization from the BIA and the Ute Tribal Department of Cultural Rights and Protection.

Upon completion of construction of the rights-of-way, Petroglyph Energy will notify the Ute Tribe Energy & Minerals Resources Department. This will be done so that a Tribal Technician can verify Affidavit of Completions.

Before the site is abandoned, the company will be required to restore the well site and ROWs to near their original state. The disturbed areas will be reseeded with desirable perennial vegetation.

Noxious weeds will be controlled on the well site and rights-of-way. If noxious weeds spread from the project area onto adjoining land, the company will also be responsible for their control.

Soil erosion will be mitigated by reseeding all disturbed areas.

Reserve pits will be lined with impervious synthetic liners. Prior to backfilling the reserve pit all fluids will be pumped from the pit into trucks and hauled to approved disposal sites. When the pits are backfilled, the surplus oil and mud etc. will be buried a minimum depth of 3.0 feet below the surface of the soil.

A closed production system will be used. Production fluids will be contained in leak proof tanks. Low profile tanks may be used to minimize problems with irrigation systems. All production fluids will be disposed of at approved disposal sites. Production water, oil, and other by-products will not be applied to roads or well pads for the control of dust or weeds. The indiscriminate dumping of production fluids on roads, wellsites or other areas will not be allowed.

Although the access road right of way is 30 feet wide, access roads shall have constructed travel width limited to 18 feet, except as granted for sharp curves, for intersections with other roads, and for where deep cuts and fills are required for road construction.

Surface pipelines will be constructed to lay on the soil surface, and the ROW for the pipeline will not be bladed or cleared of vegetation without site specific authorization from BIA and Ute Tribe Energy & Minerals.

Where surface pipelines do not parallel roads but cross country between stations. The line shall either be welded in place at welding stations located at wellsites or on roads near the flowline right of way and then dragged into place with a suitable piece of equipment so it will not destroy the natural vegetation. If the flowline doesn't follow existing and APD proposed new access roads then traffic shall be restricted along pipeline ROWs so that they will not be used as an access road.

Buried flowlines shall be a minimum of three feet below the surface. After the construction of the pipeline is completed the disturbed area of the ROW shall be contoured to blend into the natural landscape, and it shall be reseeded with desirable vegetation. Between September 15 and November 1 of the year following pipeline construction of the buried line all disturbed areas shall be reseeded with perennial vegetation according to BIA, or to Ute Tribe specifications.

Petroglyph Energy employees, representatives, and subcontractors shall not carry firearms on their person or in their vehicles while working on the Uintah and Ouray Indian Reservation.

CONFIDENTIAL

STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: Petroglyph Operating Co. Operator Account Number: N 3800  
Address: P.O. Box 607  
city Roosevelt  
state UT zip 84066 Phone Number: (435) 722-2531

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
4301332161	Ute Tribal 19-08		sene	19	5S	3W	Duchesne
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
B	99999	09397	10/29/2000			10-29-00	
Comments: This well will be in a commingled battery at the Ute Tribal 19-16 entity # 09397 12-11-00							

CONFIDENTIAL

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
4301332182	Ute Tribal 19-10		nwse	19	5S	3W	Duchesne
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
B	99999	12353	11/7/2000			11-17-20	
Comments: This well will be in a commingled battery at the Ute Tribal 19-11 Entity # 12353 12-11-00							

CONFIDENTIAL

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
4301331894	Ute Tribal 19-13		sww	19	5S	3W	Duchesne
Action Code	Current Entity Number	New Entity Number	Spud Date			Entity Assignment Effective Date	
A	99999	12976	11/16/2000			11-16-00	
Comments: This well will be an injection well within the Antelope Creek Field 12-11-00							

CONFIDENTIAL

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Micheal Safford

Name (Please Print)

Signature

Operations Coordinator

Title

12/4/2000

Date

RECEIVED

DEC 07 2000

DIVISION OF  
OIL, GAS AND MINING



**Petroglyph Energy, Inc.**  
1302 N. Grand  
Hutchinson, KS 67502

P.O. Box 1839  
Hutchinson, KS 67504-1839

316 665-8500  
316 665-8577 fax

C. NTIAL

December 5, 2000

Carol Daniels  
State of Utah  
Division of Oil, Gas & Mining  
1594 W. North Temple, Ste. 1210  
Salt Lake City, UT 84114

Carol:

Enclosed please find the logs listed below for the wells located in Duchesne County, Utah.

**Well Name**

Ute Tribal 29-01  
Ute Tribal 19-13  
413-013-32182-Ute Tribal 19-10

**Log**

HRI & Spectral Density Dual Spaced Neutron  
DIL & Spectral Density Dual Spaced Neutron  
HRI - *Log filed with log files*

Please hold these in confidence as permitted in division guidelines. If you need further information, please do not hesitate to call me at 316-665-8500.

Sincerely,

Brooke Maxfield  
Administrative Geological Technician  
Petroglyph Energy, Inc.  
1302 N. Grand  
Hutchinson, KS 67501  
E-mail: brooke@petroglyph.net

RECEIVED

DEC 6 8 2000

DIVISION OF  
OIL, GAS AND MINING

**CONFIDENTIAL**

Form 3160-5  
(August 1999)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**  
Do not use this form for proposals to drill or to re-enter an  
abandoned well. Use Form 3160-3 (APD) for such proposals

5. Lease Serial No. <b>1420H623514</b>
6. If Indian, Allottee or Tribe Name <b>UTE INDIAN TRIBE</b>
7. If Unit or CA Agreement, Name and No. <b>1420H624650</b>
8. Lease Name and Well No. <b>UTE TRIBAL 19-10</b>
9. API Well No. <b>4301332182</b>
10. Field and Pool, or Exploratory <b>ANTELOPE CREEK</b>
11. County or Parish, State <b>DUCHESNE, UT</b>

**SUBMIT IN TRIPLICATE- Other Instructions on reverse side**

1. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other	
2. Name of Operator <b>PETROGLYPH OPERATING COMPANY, CONTACT: MICHEAL SAFFORD COORDINATOR EMAIL: mikes@petroglyph.net</b>	
3a. Address <b>P.O. BOX 607 ROOSEVELT, UT 84066</b>	3b. Phone No. (include area code) <b>TEL: 435.722.2531 EXT: FAX: 435.722.9145</b>
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) <b>Sec 19 T05S R03W NWSE 1851FSL 2011FEL</b>	

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input checked="" type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give the subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with the BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of involved operations. If the operation results in multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

the above referenced well spud 11/07/2000.

Drilled 12-1/4" surface hole to 340' cemented with 210 sxs of PREM PLUS cement with 2% CACL2.

Drilled 7-7/8" hole to 6273' production casing 5.5" 15.5# K55 cemented with 630 sxs of Prem Plus w/ 16% gel .75% EX 1, .125 polyflake, 5# gilsonite

**RECEIVED**

JAN 30 2001

DIVISION OF  
OIL, GAS AND MINING

Name (Printed/Typed)	Title
Signature	Date

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by	Title	Date
*Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		
Office		

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

**ELECTRONIC SUBMISSION #2395 VERIFIED BY THE BLM WELL INFORMATION SYSTEM FOR PETROGLYPH OPERATING COMPANY, SENT TO THE VERNAL FIELD OFFICE**

**CONFIDENTIAL**

Form 3160-5  
(August 1999)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
**SUNDRY NOTICES AND REPORTS ON WELLS**  
Do not use this form for proposals to drill or to re-enter an  
abandoned well. Use Form 3160-3 (APD) for such proposals

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

<b>SUBMIT IN TRIPLICATE- Other Instructions on reverse side</b>		5. Lease Serial No. <b>1420H623514</b>
1. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		6. If Indian, Allottee or Tribe Name <b>UTE INDIAN TRIBE</b>
2. Name of Operator <b>PETROGLYPH OPERATING COMPANY, CONTACT: MICHEAL SAFFORD COORDINATOR EMAIL: mikes@petroglyph.net</b>		7. If Unit or CA Agreement, Name and No. <b>1420H624650</b>
3a. Address <b>P.O. BOX 607 ROOSEVELT, UT 84066</b>	3b. Phone No. (include area code) <b>TEL: 435.722.2531 EXT: FAX: 435.722.9145</b>	8. Lease Name and Well No. <b>UTE TRIBAL 19-10</b>
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) <b>Sec 19 T05S R03W NWSE 1851FSL 2011FEL</b>		9. API Well No. <b>4301332182</b>
		10. Field and Pool, or Exploratory <b>ANTELOPE CREEK</b>
		11. County or Parish, State <b>DUCHESNE, UT</b>

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> <b>PRODUCTION START-UP</b>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give the subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with the BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of involved operations. If the operation results in multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Date of first Production 12/7/2000.

**RECEIVED**  
JAN 30 2001  
DIVISION OF  
OIL, GAS AND MINING

Name (Printed/Typed)		Title	
Signature		Date	
<b>THIS SPACE FOR FEDERAL OR STATE OFFICE USE</b>			
Approved by		Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

**ELECTRONIC SUBMISSION #2408 VERIFIED BY THE BLM WELL INFORMATION SYSTEM FOR PETROGLYPH OPERATING COMPANY, SENT TO THE VERNAL FIELD OFFICE**

**CONFIDENTIAL**

Form 3160-4  
(August 1999)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires November 30, 2000

**WELL COMPLETION OR RECOMPLETION REPORT AND LOG**

1a. Type of Well:  Oil Well  Gas Well  Dry  Other  
 b. Type of Completion:  New Well  Workover  Deepen  Plug Back  Diff. Resvr.  
 Other \_\_\_\_\_

5. Lease Serial No.  
**1420H623514**

6. If Indian, Allottee or Tribe Name  
**UTE INDIAN TRIBE**

7. Unit or CA Agreement Name and No.  
**1420H624650**

2. Name of Operator  
**PETROGLYPH OPERATING COMPANY,**

CONTACT: MICHEAL SAFFORD  
EMAIL: [mikes@petroglyph.net](mailto:mikes@petroglyph.net)

8. Lease Name and Well No.  
**UTE TRIBAL 19-10**

3. Address **P.O. BOX 607  
ROOSEVELT, UT 84066**

3a. Phone No. (include area code)  
TEL: **435.722.2531 EXT:**

9. API Well No.  
**4301332182**

4. Location of Well (Report location clearly and in accordance with Federal requirements)  
At Surface **NWSE 1851FSL 2011FEL**

**CONFIDENTIAL  
PERIOD  
EXPIRED  
ON 01-02-02**

10. Field and Pool, or Exploratory  
**ANTELOPE CREEK**

At top prod. interval reported below **NWSE 1851FSL 2011FEL**

11. Sec., T., R., M., on Block and Survey or Area  
**Sec 19 T05S R03W UBM**

At total depth **NWSE 1851FSL 2011FEL**

12. County or Parish  
**DUCHESNE**

13. State  
**UT**

14. Date Spudded  
**11/8/00**

15. Date T.D. Reached  
**11/13/00**

16. Date Completed **12/2/00**  
 D & A  Ready to Prod.

17. Elevations (DF, RKB, RT, GL)\*  
**6394 KB**

18. Total Depth: MD **6273**  
TVD

19. Plug Back T.D.: MD **6230**  
TVD

20. Depth Bridge Plug Set: MD  
TVD

21. Type Electric & Other Mechanical Logs Run (Submit copy of each)  
**HRI - 12-8-00**

22. Was well cored?  No  Yes (Submit analysis)  
Was DST run?  No  Yes (Submit report)  
Directional Survey?  No  Yes (Submit copy)

23. Casing and Liner Record (Report all strings set in well)

Hole Size	Size/Grade	Wt. (#/ft.)	Top (MD)	Bottom (MD)	Stage Cementer Depth	No. of Sks. & Type of Cement	Slurry Vol. (BBL)	Cement Top*	Amount Pulled
12.25	8.625 J-55	24		340		210			
7.875	5.5 K-55	15.5		6271		630			

24. Tubing Record

Size	Depth Set(MD)	Packer Depth(MD)	Size	Depth Set(MD)	Packer Depth(MD)	Size	Depth Set(MD)	Packer Depth(MD)
2.875	5636							

25. Producing Intervals

Formation	Top	Bottom	Perforated Interval	Size	No. Holes	Perf. Status
A) GREEN RIVER	4604	5561	4604 To 5561	0.51	212	
B)						
C)						
D)						

**RECEIVED**

27. Acid, Fracture, Treatment, Cement Squeeze, Etc.

Depth Interval	Amount and Type of Material
4604 To 4659	FRAC W/ 29,900 20/40, 16/30 SAND
4748 To 4761	FRAC W/ 31,500 20/40, 16/30 SAND
4823 To 4841	FRAC W/ 32,000 20/40, 16/30 SAND
5148 To 5154	FRAC W/ 21,900 20/40, 16,30 SAND
5556 To 5561	FRAC W/ 21,500 20/40, 16/30 SAND

**JAN 30 2001**

**DIVISION OF  
OIL, GAS AND MINING**

28. Production - Interval A

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
12/7/00	12/8/00	24	→	29	20	99			GAS PUMPING UNIT
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
	0	60	→					PRODUCING OIL WELL	

28a. Production - Interval B

Date First Produced	Test Date	Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
			→						
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	
			→						

(See instructions and spaces for additional data on reverse side)  
ELECTRONIC SUBMISSION #2407 VERIFIED BY THE BLM WELL INFORMATION SYSTEM FOR PETROGLYPH OPERATING COMPANY, SENT TO THE VERNAL FIELD OFFICE

28b. Production - Interval C

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

28c. Production - Interval D

Date First Produced	Test Date	Hours Tested	Test Production →	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method
Choke Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate →	Oil BBL	Gas MCF	Water BBL	Gas:Oil Ratio	Well Status	

29. Disposition of Gas (Sold, used for fuel, vented, etc.)  
**SOLD**

30. Summary of Porous Zones (Include Aquifers):  
Show all important zones of porosity and contents thereof. Cored intervals and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures and recoveries.

31. Formation (Log) Markers

Formation	Top	Bottom	Description, Contents, etc.	Name	Top
					Meas. Depth
C5, C5.2	4604	4659		B MARKER	3929
C6	4748	4761		X MARKER	4413
C8.2, C9.1	4823	4841		Y MARKER	4448
D7	5148	5154		DOUGLAS CREEK	4550
E1.2	5556	5561		B LIMESTONE	4942
				BASE CASTLE PEAK	5496
				BASAL CARBONATE	5919

32. Additional remarks (include plugging procedure):

Date of first Production 12/7/2000.

33. Circle enclosed attachments:
- 1. Electrical/Mechanical Logs (1 full set req'd.)
  - 2. Geologic Report
  - 3. DST Report
  - 4. Directional Survey
  - 5. Sundry Notice for plugging and cement verification
  - 6. Core Analysis
  - 7. Other:

34. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records (see attached instructions):

Name (please print) \_\_\_\_\_ Title \_\_\_\_\_

Signature \_\_\_\_\_ Date \_\_\_\_\_

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and wilfully to make to any department or agency of the United States and false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**ELECTRONIC SUBMISSION #2407 VERIFIED BY THE BLM WELL INFORMATION SYSTEM FOR PETROGLYPH OPERATING COMPANY, SENT TO THE VERNAL FIELD OFFICE**

JAN 06 2001

DIVISION OF  
OIL, GAS AND MINING

1/22/2001

STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>		5. LEASE DESIGNATION AND SERIAL NUMBER: 1420H624650
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: Ute Indian Tribe
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		7. UNIT or CA AGREEMENT NAME: Ute Tribal 19-06
		8. WELL NAME and NUMBER: See Below
1. TYPE OF WELL OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____	9. API NUMBER: See Below	
2. NAME OF OPERATOR: Petroglyph Operating Company		10. FIELD AND POOL, OR WILDCAT: Antelope Creek
3. ADDRESS OF OPERATOR: P.O. Box 607 CITY Roosevelt STATE UT ZIP 84066		PHONE NUMBER: 722-2531
4. LOCATION OF WELL FOOTAGES AT SURFACE: Multiple/See Below		COUNTY: Duchesne
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		STATE: UT UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input checked="" type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: Facility Changes
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Well Name	API#	S/T/R	Type	Status	Entity#
Ute 19-10	430133218200S1	19/5S/3W	Oil	POW	12353
Ute 19-12	430133179500S1	19/05S/03W	Oil	POW	12353
Ute 19-14	430133196600S1	19/05S/03W	Oil	POW	12353
All wells were moved to the Ute Tribal 19-06 Tank Battery.					
Ute 19-06			Oil	POW	12210

NAME (PLEASE PRINT) <u>Callie Peatross</u>	TITLE <u>Production Clerk</u>
SIGNATURE <u>Callie Peatross</u>	DATE <u>04-25-03</u>

(This space for State use only)

RECEIVED  
APR 28 2003

STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 6

ENTITY ACTION FORM

Operator: Petroglyph  
Address: P.O. Box 607  
city Roosevelt  
state Utah zip 84066

Operator Account Number: N 3800

Phone Number: 435-722-2531

Well 1

API Number	Well Name		QQ	Sec	Twp	Rng	County
43013317816051	Ute Tribal 18-06		SWNW	18	55	3W	Duchesne
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
C	09387	12245	4/5/1997		March-2003		
Comments:							7/9/03 ✓
Now on 18-01 Tank Battery.							

Well 2

API Number	Well Name		QQ	Sec	Twp	Rng	County
43013317830051	Ute Tribal 18-12		NWSE	18	55	3W	Duchesne
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
C	09387	12245	4/7/1997		March-2003		
Comments:							7/9/03 ✓
Now on 18-01 Tank Battery.							

Well 3

API Number	Well Name		QQ	Sec	Twp	Rng	County
43013321820051	Ute Tribal 19-10		NWSE	19	55	3W	Duchesne
Action Code	Current Entity Number	New Entity Number	Spud Date		Entity Assignment Effective Date		
C	12353	12210	11/8/2000		March-2003		
Comments:							7/9/03 ✓
Now on 19-06 TB.							

ACTION CODES:

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (Explain in 'comments' section)

Callie Peatross  
Name (Please Print)  
Callie Peatross  
Signature  
Production Assistant  
7-7-03  
Date

RECEIVED

JUL 07 2003

DIV. OF OIL, GAS & MINING