

FILE NOTATIONS

Entered in N I D File

\_\_\_\_\_ ✓

Checked by Chief

\_\_\_\_\_

Entered On S R Sheet

\_\_\_\_\_ ✓

Copy N I D to Field Office

\_\_\_\_\_

Location Map Pinned

\_\_\_\_\_ ✓

Approval Letter

\_\_\_\_\_ ✓

Card Indexed

\_\_\_\_\_ ✓

Disapproval Letter

\_\_\_\_\_

I W R for State or Fee Land

\_\_\_\_\_

COMPLETION DATA:

Date Well Completed

3/24/57

Location Inspected

PWB

OW

WW

TA

Bond released

GW

OS

PA

State of Fee Land

\_\_\_\_\_

LOGS FILED

Driller's Log

4-15-57

Electric Logs (No.)

3

E

✓

E-I

GR

GR-N

✓

Micro

2

Lat

Mi-L

Sonic

Others

Subsequent Report of Abandonment

		X
	27	

(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office Salt Lake City

Lease No. ....

Unit .....

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	X	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

November 2, 1956, 19.....

Coon Springs Unit  
Well No. 1 is located 360 ft. from {N} line and 1980 ft. from {E} line of sec. 27  
NW NE Section 27 16S 12E SLM  
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
Coon Springs WC Emery Utah  
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is ..... ft. Not run yet

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)


Rotary drilling equipment will be used to test the Madison formation to a depth of approximately 7200' unless commercial production is found at a lesser depth  
Surface formation is Morrison  
Surface casing - approximately 550' of 10-3/4" OD J55 smls casing cemented to surface.  
Oil string - required amount of 7" OD J55 ss casing cemented with sufficient cement to protect all possible pay zones.  
Oil emulsion mud to be used under surface casing to TD. All oil and gas shows will be drill stem tested. Electric logs etc will be run before setting casing or abandonment. Stimulation treatments such as acidizing or fracturing may be employed.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company The Carter Oil Company

Address Box 472  
Vernal, Utah

CCPY (ORIGINAL SIGNED) B. M. BRADLEY  
By B M Bradley  
Title District Superintendent



(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office Salt Lake City  
Lease No. U-06205-4  
Unit Coon Springs

*Noted  
OK'd  
12/12/56*

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....	<u>Report of setting 10-3/4" casing</u>	<input checked="" type="checkbox"/>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

December 11, 1956

**Coon Springs Unit**  
**now called Government Wheatley**

Well No. 1 is located 360 ft. from N line and 1900 ft. from E line of sec. 27

NE SE Sec. 27      16S      12E      SLM  
(1/4 Sec. and Sec. No.)      (Twp.)      (Range)      (Meridian)

Coon Springs WC      Henry      Utah  
(Field)      (County or Subdivision)      (State or Territory)

The elevation of the derrick floor above sea level is 5772 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)


Run 591' (19 joints) of 10-3/4" OD 40.5# J-55 seamless casing set at 578'. Cemented with 30 sacks regular cement. Cement circulated to surface. Pumped plug with 1200f. Centralizer at 567' and 477'. Scrubbers 574-589. Job completed 8:35 PM 12-4-56.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company The Carter Oil Company  
Address Box 472  
Yernal, Utah

By COPY (ORIGINAL SIGNED) B. M. BRADLEY  
Title District Supt.


**COON SPRINGS UNIT**  
EMERY COUNTY,  
UTAH

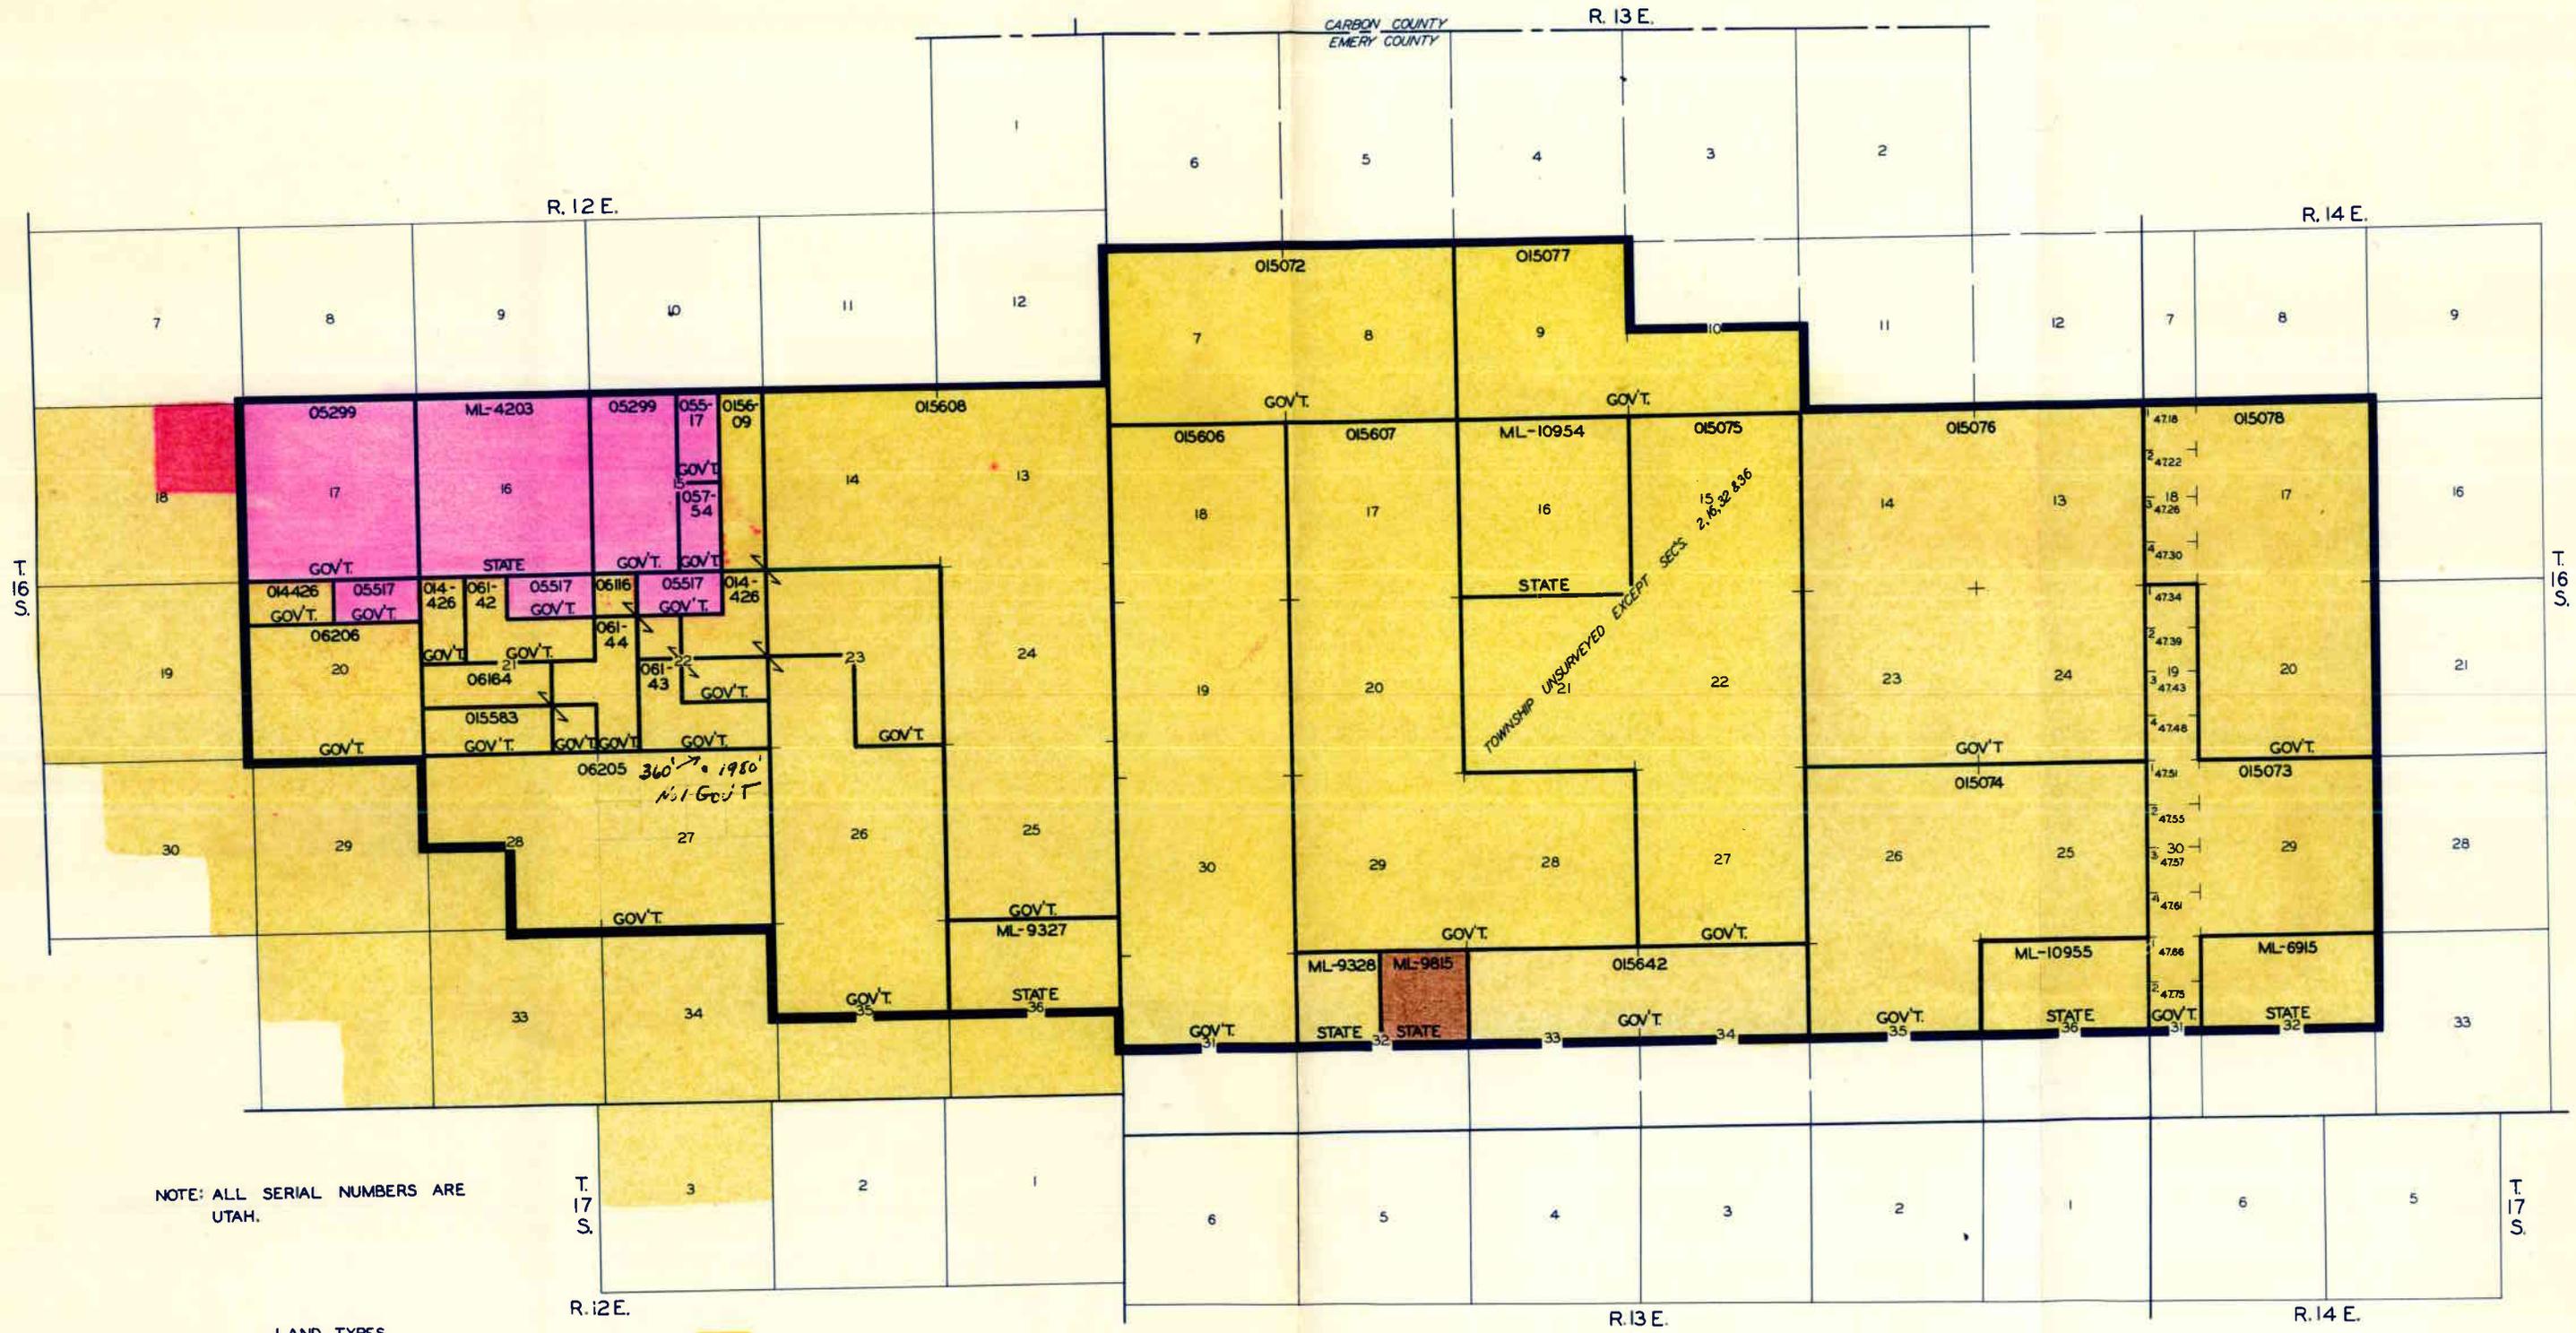

NOTE: ALL SERIAL NUMBERS ARE UTAH.

LAND TYPES		
GOV'T.	25,464.25	90.865%
STATE	2,560.00	9.135%
<b>TOTAL</b>	<b>28,024.25</b>	<b>100.000%</b>

- Carter
- Equity
- Gulf



(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office MLC

Lease No. U-0805-A

Unit Coom Springs

*Notes  
Case  
1-15-57*

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....	<u>Report of Drill Stem test</u>	<u>X</u>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

January 10, 1957

19

Government-Wholesale

Well No. 1 is located 360 ft. from N line and 1000 ft. from E line of sec. 27

N 1/2 Sec 27  
(1/4 Sec. and Sec. No.)

14S  
(Twp.)

12E  
(Range)

51M  
(Meridian)

Coom Springs Wd  
(Field)

Emery  
(County or Subdivision)

Utah  
(State or Territory)

The elevation of the derrick floor above sea level is \_\_\_\_\_ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

12-29-56

1ST #1 - RD 3,573' packer at 3,502' - Tool open at 7:30 AM, open 1 hour start in 30 minutes. Opened with strong blow, gas to surface in 10 minutes, would not burn, gas had slight H<sub>2</sub>S odor, blow remained strong through test, gaged with pilot tube - in 1/2 hr 1200 MCF, 1 hour 1210 MCF, 2 hours 1370 MCF, 3 hours 1500 MCF, 4 hours 1600 MCF. Recovered 185' slightly gas out and hourly sulphur out drilling fluid. IFF 700, FFF 225, SID 925, FRP 1600.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company The Carter Oil Company

Address Box 472


Vernal, Utah

COPY (ORIGINAL SIGNED) B. M. BRADLEY

By \_\_\_\_\_

B M Bradley

Title District Superintendent



(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office SLC  
Lease No. U-06205-4  
Unit Geom Springs

*Noted  
L-47  
2-18-57*

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....	<u>Report of Drill Stem Test</u>	<u>X</u>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

February 6, 1957, 19

~~Government-Wheatley~~  
Well No. 1 is located 360 ft. from [N] line and 2900 ft. from [E] line of sec. 27  
NW 1/2 Sec. 27 (1/4 Sec. and Sec. No.) 16S (Twp.) 12E (Range) SLM (Meridian)  
Geom Springs WC (Field) Emery (County or Subdivision) Utah (State or Territory)

The elevation of the derrick floor above sea level is 5772 ft.

DETAILS OF WORK


(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

1-21-57  
WT #3 - Packer 4197 - TD 4524 Tool open 7:02 a.m., no blow, by-passed 7:17 a.m. Open 7:37 a.m. no blow, by-passed 8:14 a.m. Open 8:26 a.m., very weak initial blow, dead in 1 minute. Recovered 8" drilling fluid. IHP 2055, IFF 0, FIP 204 30 minutes, IIP 0, FIP 2015 - no indication of tool plugging. Tool open 2 hours.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company The Carter Oil Company  
Address Box 477  
Vernal, Utah  
By B. M. Bradley  
Title District Superintendent

COPY (ORIGINAL SIGNED) B. M. BRADLEY



(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office WLC  
Lease No. W-16205-1  
Unit COON SPRINGS

*Note*  
*OK*  
*2-18-57*

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....	<u>Report of Drill Stem Test</u>	<u>X</u>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

February 6, 1957, 19

**Government-leased**

Well No. 1 is located 300 ft. from N line and 2000 ft. from E line of sec. 27

1/4 Sec. 27  
(1/4 Sec. and Sec. No.)

16E  
(Twp.)

12E  
(Range)

51N  
(Meridian)

Coon Springs WC  
(Field)

Emery  
(County or Subdivision)

Utah  
(State or Territory)

The elevation of the derrick floor above sea level is 5722 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

2-14-57

EST #2 - 1642-1650 opened tool @ 11:50 a.m. closed tool @ 2:50 p.m. Very weak initial blow increasing to weak blow at end of test. Tool open 3 hours shut in 30 minutes. Recovered 30' water cut mud and 30' water, 8,000 ppm chloride, IFF 50%, FFF 150%, SIF 1370', NF 2118.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company The Carter Oil Company

Address Box 477

Normal, Utah

By RODY (ORIGINAL) R. H. BRADLEY

R. H. Bradley  
Title District Superintendent

		X
	27	

(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office SLC  
Lease No. U-06205-A  
Unit Coon Springs

*Handwritten:*  
2-18-57

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....
NOTICE OF INTENTION TO ABANDON WELL.....	<u>Report of Drill Stem Test</u> <b>X</b>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

February 12, 1957

Government-Wheatley

Well No. 1 is located 360 ft. from N line and 1980 ft. from E line of sec. 27  
NE NE Sec. 27 16S 12E SLM  
(¼ Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
Coon Springs WC Emery Utah  
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 5772 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

2-7-57  
IST #4, TD 5169, Packer 5132. Open 8:16 a.m., faint initial blow increasing to good in 1 hour. Remained good to end of test. No gas to surface. Open 2 hours, SI 45 minutes, Recovered 120' drlg. fluid very slightly gas cut. No oil. IHP 2360', ITP 20', VTP 90', SIP 1580', VTP 2315'.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company The Carter Oil Company  
 Address Box 472  
Vernal, Utah  
 By B. N. Bradley  
 Title District Superintendent

		<b>X</b>
	<b>27</b>	

(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office **SLC**  
Lease No. **U 06205A**  
Unit **Coon Springs**

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....		SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....	<b>X</b>		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

March 22, 1957

19

**Government-Wheatley**

Well No. **1** is located **360** ft. from **N** line and **1980** ft. from **E** line of sec. **27**

**NW NE Sec 27**                      **16S**      **12E**                      **SLM**  
(1/4 Sec. and Sec. No.)                      (Twp.)                      (Range)                      (Meridian)  
**Coon Springs WC**                      **Emery**                      **Utah**  
(Field)                      (County or Subdivision)                      (State or Territory)

The elevation of the derrick floor above sea level is **5772** ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

TD 7132'

It is intended to plug and abandon the well as follows:


- Cement plugs - 25 sacks 7000-6910'
  - 50 sacks 4518-1398'
  - 25 sacks 3590-3530'
  - 25 sacks 3100-3160'
  - 25 sacks 2630-2690'
  - 30 sacks 608-518'
  - 15 sacks 30'-surface
- To install a 4" dry hole marker extending 4' above ground level

Verbal approval via: H C Scoville, Casper  
Intervals between plugs to be filled with drilling mud.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company **The Carter Oil Company**  
Address **Box 472**  
**Vernal, Utah**  
By **B M Bradley**  
Title **District Superintendent**

U. S. LAND OFFICE SLC  
SERIAL NUMBER U-06805-4  
LEASE OR PERMIT TO PROSPECT \_\_\_\_\_

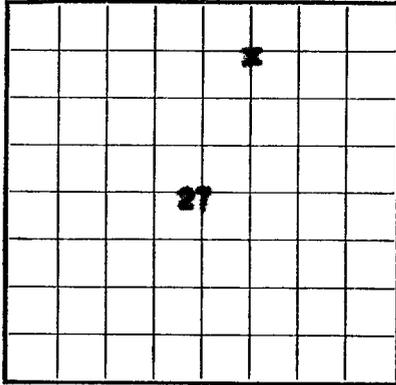

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

*7/total  
4-17-57*

LOG OF OIL OR GAS WELL

LOCATE WELL CORRECTLY

Company The Carter Oil Company Address Box 144, Durango, Colorado  
Lessor or Tract Government-Heasley Field Coom Springs WC State Utah  
Well No. 1 Sec. 27 T. 16S R. 12E Meridian SLM County Sanju  
Location 360 ft. N of E Line and 1900 W of E Line of Section 27 Elevation 5772'  
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.  
Signed [Signature]

Date April 12, 1957 Title District Chief Clerk

The summary on this page is for the condition of the well at above date.

Commenced drilling Nov 29, 1956, 19... Finished drilling March 24, 1957, 19...

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 3902 to 3573 G(CO<sub>2</sub>) No. 4, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 5, from \_\_\_\_\_ to \_\_\_\_\_  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

IMPORTANT WATER SANDS

No. 1, from None to \_\_\_\_\_ No. 3, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 4, from \_\_\_\_\_ to \_\_\_\_\_

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From-	To-	
<u>10-3/4"</u>	<u>40.5</u>	<u>8rd</u>	<u>J-55</u>	<u>592</u>	<u>HUNCO</u>	<u>-</u>	<u>-</u>	<u>0</u>	<u>Surface</u>
HISTORY OF OIL OR GAS WELL									

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>10-3/4"</u>	<u>578</u>	<u>300</u>	<u>Halliburton</u>		

PLUGS AND ADAPTERS

OLD MARK

Heaving plug—Material \_\_\_\_\_ Length \_\_\_\_\_ Depth set \_\_\_\_\_  
 Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

**SHOOTING RECORD**

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

**TOOLS USED**

Rotary tools were used from 0 feet to 7132 feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

Cable tools were used from None feet to \_\_\_\_\_ feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

**DATES**

D & A 3-24-57, 19\_\_\_\_ Put to producing \_\_\_\_\_, 19\_\_\_\_

The production for the first 24 hours was \_\_\_\_\_ barrels of fluid of which \_\_\_\_\_% was oil; \_\_\_\_\_% emulsion; \_\_\_\_\_% water; and \_\_\_\_\_% sediment. Gravity, °Bé. \_\_\_\_\_

If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_

Rock pressure, lbs. per sq. in. \_\_\_\_\_

**EMPLOYEES**

W Jacoby \_\_\_\_\_, Driller Bob Dunson \_\_\_\_\_, Driller

Arvel Bartlett \_\_\_\_\_, Driller \_\_\_\_\_, Driller

**FORMATION RECORD**

FROM—	TO—	TOTAL FEET	FORMATION
Surface	832	832	Merriam - Alternating shale & sands
832	980	148	Sunmerville - Shale & siltstone
980	1135	155	Curtis - Siltstone & sandstone
1135	1440	305	Kotrada - Sandstone & shale
1440	1755	315	Carroll - Siltstone
1755	2120	365	Navajo - Sandstone
2120	2272	102	Kayenta - Shale & sandstone
2272	2634	412	Wingate - Sandstone
2634	2876	242	Chinle - Shale
2876	2960	84	Shinarump - Sandstone and shale
2960	3455	495	Moenkopi - Shale & evaporites
3455	3846	391	Sinbad - Dolomite and siltstone
3846	3975	129	Kiabab - Limestone
3975	4435	460	Cocconino - Sandstone
4435	4830	395	Hermosa - Rice - Shale & limestone
4830	6140	1310	Pennsylvanian - Shale-limestones & sands
6140	6420	270	Humburg - Siltstones & shales
6420	6585	175	Desert - Dolomite
6585	7000	415	Madison - Dolomite
7000	7132	132	Chert Zone - Chert & dolomite

NEW MEXICO RECORDS - LOWELL, ARIZONA

APR 19 1957

		X
	27	

(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Land Office SLC  
Lease No. U 06205A  
Unit Coon Springs

*Notes  
Cook  
8-14-57*

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	X
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

August 8, 1957

Government-Wheatley

Well No. 1 is located 360 ft. from [N] line and 1980 ft. from [E] line of sec. 27  
NW NE Section 27      16S      12E      SLM  
(1/4 Sec. and Sec. No.)      (Twp.)      (Range)      (Meridian)  
Coon Springs WC      Emery      Utah  
(Field)      (County or Subdivision)      (State or Territory)

The elevation of the derrick floor above sea level is 5772 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

TD 7132'

Well plugged and abandoned as follows:

- Cement plugs - 25 sacks 7000-6940'
- 50 sacks 4518-4398'
- 25 sacks 3590-3530'
- 25 sacks 3400-3460'
- 25 sacks 2630-2690'
- 30 sacks 608-548'
- 15 sacks 30' to surface

Intervals between plugs filled with drilling mud, erected a 4" dry hole marker extending 4' above ground level. Filled pits and cleaned location, ready for inspection.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company The Carter Oil Company  
Address Box 444  
Durango, Colorado  
By B. M. Bradley  
Title District Superintendent

COPY (ORIGINAL) B. M. BRADLEY