

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 3

AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL						1. WELL NAME and NUMBER wilkin ridge federal 32-17-10-17	
2. TYPE OF WORK DRILL NEW WELL <input checked="" type="checkbox"/> REENTER P&A WELL <input type="checkbox"/> DEEPEN WELL <input type="checkbox"/>						3. FIELD OR WILDCAT EIGHT MILE FLAT	
4. TYPE OF WELL Gas Well Coalbed Methane Well: NO						5. UNIT or COMMUNITIZATION AGREEMENT NAME WILKIN RIDGE DEEP	
6. NAME OF OPERATOR GASCO PRODUCTION COMPANY						7. OPERATOR PHONE 303 483-0044	
8. ADDRESS OF OPERATOR 8 Inverness Dr. East, Suite 100, Englewood, CO, 80112						9. OPERATOR E-MAIL jlongwell@gascoenergy.com	
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE) UTU-75082			11. MINERAL OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>			12. SURFACE OWNERSHIP FEDERAL <input checked="" type="checkbox"/> INDIAN <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input type="checkbox"/>	
13. NAME OF SURFACE OWNER (if box 12 = 'fee')						14. SURFACE OWNER PHONE (if box 12 = 'fee')	
15. ADDRESS OF SURFACE OWNER (if box 12 = 'fee')						16. SURFACE OWNER E-MAIL (if box 12 = 'fee')	
17. INDIAN ALLOTTEE OR TRIBE NAME (if box 12 = 'INDIAN')			18. INTEND TO COMMINGLE PRODUCTION FROM MULTIPLE FORMATIONS YES <input type="checkbox"/> (Submit Commingling Application) NO <input checked="" type="checkbox"/>			19. SLANT VERTICAL <input checked="" type="checkbox"/> DIRECTIONAL <input type="checkbox"/> HORIZONTAL <input type="checkbox"/>	
20. LOCATION OF WELL	FOOTAGES	QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN	
LOCATION AT SURFACE	1978 FNL 1972 FEL	SWNE	17	10.0 S	17.0 E	S	
Top of Uppermost Producing Zone	1978 FNL 1972 FEL	SWNE	17	10.0 S	17.0 E	S	
At Total Depth	1978 FNL 1972 FEL	SWNE	17	10.0 S	17.0 E	S	
21. COUNTY DUCHESNE			22. DISTANCE TO NEAREST LEASE LINE (Feet) 1972			23. NUMBER OF ACRES IN DRILLING UNIT 1276	
			25. DISTANCE TO NEAREST WELL IN SAME POOL (Applied For Drilling or Completed) 2700			26. PROPOSED DEPTH MD: 13400 TVD: 13400	
27. ELEVATION - GROUND LEVEL 5933			28. BOND NUMBER UT-1233			29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE #41-3530	
ATTACHMENTS							
VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES							
<input checked="" type="checkbox"/> WELL PLAT OR MAP PREPARED BY LICENSED SURVEYOR OR ENGINEER				<input checked="" type="checkbox"/> COMPLETE DRILLING PLAN			
<input type="checkbox"/> AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)				<input type="checkbox"/> FORM 5. IF OPERATOR IS OTHER THAN THE LEASE OWNER			
<input type="checkbox"/> DIRECTIONAL SURVEY PLAN (IF DIRECTIONALLY OR HORIZONTALLY DRILLED)				<input checked="" type="checkbox"/> TOPOGRAPHICAL MAP			
NAME Roger Knight			TITLE EHS Supervisor			PHONE 303 996-1803	
SIGNATURE			DATE 11/06/2009			EMAIL rknight@gascoenergy.com	
API NUMBER ASSIGNED 43013501800000			APPROVAL  Permit Manager				

Proposed Hole, Casing, and Cement						
String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Cond	17.5	13.375	0	200		
Pipe	Grade	Length	Weight			
	Grade H-40 ST&C	40	48.0			

CONFIDENTIAL

Proposed Hole, Casing, and Cement						
String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Surf	12.25	8.625	0	3645		
Pipe	Grade	Length	Weight			
	Grade J-55 ST&C	40	32.0			

CONFIDENTIAL

Proposed Hole, Casing, and Cement						
String	Hole Size	Casing Size	Top (MD)	Bottom (MD)		
Prod	7.875	4.5	0	13400		
Pipe	Grade	Length	Weight			
	Grade P-110 LT&C	40	13.5			

CONFIDENTIAL

ONSHORE ORDER NO. 1
 Gasco Production Company
Wilkin Ridge Federal #32-17-10-17
 1978' FNL and 1972' FEL
 SW NE Section 17, T10S - R17E
 Duchesne County, Utah

CONFIDENTIAL - TIGHT HOLE

Lease No. UTU-75082

DRILLING PROGRAM

Page 1

ONSHORE OIL & GAS ORDER NO. 1
 Approval of Operations on Onshore
 Federal and Indian Oil and Gas Leases

All lease and/or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations (43 CFR 3100), Onshore Oil and Gas Order No. 1, and the approved plan of operations. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.

1. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS

<i>Formation</i>	<i>Depth</i>	<i>Subsea</i>
Wasatch	5,270'	675'
Mesaverde	9,505'	-3,560'
Castlegate	12,085'	-6,140'
Blackhawk	12,355'	-6,410'
Aberdeen	13,115'	-7,170'
T.D.	13,400'	-7,455'

2. ESTIMATED DEPTH OF ANTICIPATED WATER, OIL, GAS OR MINERAL FORMATIONS:

<i>Substance</i>	<i>Formation</i>	<i>Depth</i>
Gas	Wasatch	5,400' - 9,505'
Gas	Mesaverde	9,505' - 12,085'
Gas	Blackhawk	12,355' - 13,300'

All fresh water prospectively valuable minerals encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.



'APIWellNo:43013501800000'

3. PRESSURE CONTROL EQUIPMENT

Gasco Production Company's minimum specifications for pressure control equipment are as follows:

Ram Type: 11" Hydraulic double with annular, 5000 psi w.p.

Ram type preventers and associated equipment shall be tested to approved stack working pressure if isolated by test plug or to 70 percent of internal yield pressure of casing. Pressure shall be maintained for at least 10 minutes or until requirements of test are met, whichever is longer. If a test plug is utilized, no bleed-off pressure is acceptable. For a test not utilizing a test plug, if a decline in pressure of more than 10 percent in 30 minutes occurs, the test shall be considered to have failed. Valve on casing head below test plug shall be open during test of BOP stack.

Annular type preventers (if used) shall be tested to 50 percent of rated working pressure. Pressure shall be maintained at least 10 minutes or until provisions of test are met, whichever is longer.

As a minimum, the above test shall be performed:

- a. when initially installed;
- b. whenever any seal subject to test pressure is broken
- c. following related repairs; and
- d. at 30-day intervals

Valves shall be tested from working pressure side during BOPE tests with all down stream valves open.

When testing the kill line valve(s) the check valve shall be held open or the ball removed.

Annular preventers shall be functionally operated at least weekly.

Pipe and blind rams shall be activated each trip, however, this function need not be performed more than once a day.

A BOPE pit level drill shall be conducted weekly for each drilling crew.

Pressure tests shall apply to all related well control equipment.

All of the above described tests and/or drills shall be recorded in the drilling log.



BOP systems shall be consistent with API RP53. Pressure tests will be conducted before drilling out from under casing strings which have been set and cemented in place. Blowout preventer controls will be installed prior to drilling the surface casing plug and will remain in use until the well is completed or abandoned. Preventers will be inspected and operated at least daily to ensure good mechanical working order, and this inspection will be recorded on the daily drilling report. Preventers will be pressure tested before drilling casing cement plugs.

The District Office should be notified, with sufficient lead time, in order to have the BLM representative on location during pressure testing.

- a. The size and rating of the BOP stack is shown on the attached diagram. Although a rig has not been chosen to drill this well, most of the equipment for this depth of hole in the area use a 11", 5000 psi working pressure blowout preventor.
- b. A choke line and a kill line are to be properly installed. The kill line is not to be used as a fill-up line.
- c. The accumulator system shall have a pressure capacity to provide for repeated operation of hydraulic preventers.
- d. Drill string safety valve(s), to fit all tools in the drill string, are to be maintained on the rig floor while drilling operations are in progress.

4. PROPOSED CASING AND CEMENTING PROGRAM:

- a. The proposed casing and cementing program shall be conducted as approved to protect and/or isolate all usable water zones, potentially productive zones, lost circulation zones, abnormally pressured zones, and any prospectively valuable deposits of minerals. Any isolating medium other than cement shall receive approval prior to use. The casing setting depth shall be calculated to position the casing seat opposite a competent formation which will contain the maximum pressure to which it will be exposed during normal drilling operations. Determination of casing setting depth shall be based on all relevant factors, including; presence/absence of hydrocarbons; fracture gradients; usable water zones; formation pressures; lost circulation zones; other minerals; or other unusual characteristics. All indications of usable water shall be reported.
- b. Casing design shall assume formation pressure gradients of 0.44 to 0.50 psi per foot for exploratory wells (lacking better data).



- c. Casing design shall assume fracture gradients from 0.70 to 1.00 psi per foot for exploratory wells (lacking better data)
- d. Casing collars shall have a minimum clearance of 0.422 inches of all sides in the hole/casing annulus, with recognition that variances can be granted for justified exceptions.
- e. All waiting on cement times shall be adequate to achieve a minimum of 500 psi compressive strength at the casing shoe prior to drilling out.
- f. All casing except the conductor casing, shall be new or reconditioned and tested used casing that meets or exceeds API standards for new casing.
- g. The surface casing shall be cemented back to surface either during the primary cement job or by remedial cementing.
- h. All indications of usable water shall be reported to the authorized officer prior to running the next string of casing or before plugging orders are requested, whichever occurs first.
- i. Three centralizers will be run on the bottom three joints of surface casing with a minimum of one centralizer per joint starting with the shoe joint.
- j. Top plugs shall be used to reduce contamination of cement by displacement fluid. A bottom plug or other acceptable technique, such as a suitable preflush fluid, inner string cement method, etc. shall be utilized to help isolate the cement from contamination by the mud fluid being displaced ahead of the cement slurry.
- k. All casing strings below the conductor shall be pressure tested to 0.22 psi per foot of casing string length or 1500 psi, whichever is greater, but not to exceed 70 percent of the minimum internal yield. If pressure declines more than 10 percent in 30 minutes, corrective action shall be taken.
- l. On all exploratory wells, and on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.



m. The proposed casing program will be as follows:

<i>Purpose</i>	<i>Depth</i>	<i>Hole Size</i>	<i>O.D.</i>	<i>Weight</i>	<i>Grade</i>	<i>Type</i>	<i>New/Used</i>
Conductor	0-200'	17-1/2"	13-3/8"	48#	H-40	---	New
Surface	0-3,645'	12-1/4"	8-5/8"	32#	J-55	ST&C	New
Production	0-13,400'	7-7/8"	4-1/2"	13.5#	P-110	LT&C	New

n. Casing design subject to revision based on geologic conditions encountered.

o. The cement program will be as follows:

<i>Conductor</i>	<i>Type and Amount</i>
TOC @ Surface	200 sx Premium Type 5 mixed @ 15.6 ppg, 1.18 yield
<i>Surface</i>	<i>Type and Amount</i>
TOC @ Surface	Lead: 615 sx Hi-Lift mixed @ 11 ppg, 3.91 yield Tail: 185 sx 10-2 RFC mixed @ 14.2 ppg, 1.63 yield
<i>Production</i>	<i>Type and Amount</i>
TOC @ 2,500'	Lead: 523 sx Hi-Lift mixed @ 11.5 ppg, 3.05 yield Tail: 1429 sx 50:50 Poz mixed @ 14.1 ppg, 1.28 yield

p. Anticipated cement tops will be reported as to depth; not the expected number of sacks of cement to be used. The District Office should be notified, with sufficient lead time, in order to have a BLM representative on location while running all casing strings and cementing.

q. After cementing but before commencing any test, the casing string shall stand cemented until the cement has reached a compressive strength of at least 500 psi at the shoe. WOC time shall be recorded in the driller's log.

r. The following reports shall be filed with the District Manager within 30 days after the work is completed.



1. Progress reports, Form 3160-5 (formerly 9-331) "Sundry Notices and Reports on Wells", must include complete information concerning:
 - a. Setting of each string of casing, showing the size, grade, weight of casing set, hole size, setting depth, amounts and type of cement used, whether cement circulated or the top of the cement behind the casing, depth of cementing tools used, casing test method and results, and the date work was done. Show the spud date on the first reports submitted.
 - b. Temperature or bond logs must be submitted for each well where the casing cement was not circulated to the surface.
- s. Auxiliary equipment to be used is as follows:
 1. Kelly cock
 2. No bit float is deemed necessary.
 3. A sub with a full opening valve.

5. MUD PROGRAM

- a. The proposed circulating mediums to be employed in drilling are as follows:

<i>Interval</i>	<i>Mud Type</i>	<i>Mud Wt.</i>	<i>Visc.</i>	<i>F/L</i>	<i>pH</i>
0 - 200'	Fresh Water	8.33	1	---	7
200' - 3,645'	Fresh Water	8.33	1	---	7-8
3,645' - 13,400'	Fresh Water/DAP	9.0-11.5	30-40	12-20	8

There will be sufficient mud on location to control a blowout should one occur.
A mud test shall be performed every 24 hours after mudding up to determine, as applicable: density, viscosity, gel strength, static filtration loss, and Ph.

- b. Mud monitoring equipment to be used is as follows:



1. Periodic checks will be made each tour of the mud system. The mud level will be checked visually.
- c. No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.
- d. No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.
- e. The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

6. EVALUATION PROGRAM

The anticipated type and amount of testing, logging and coring are as follows:

- a. No drill stem tests are anticipated, however, if DST's are run, the following requirements will be adhered to:

Initial opening of drill stem test tools shall be restricted to daylight hours unless specific approval to start during other hours is obtained from the authorized officer. However, DST's may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e. lighting which is adequate for visibility and vapor-proof for safe operations). Packers can be released, but tripping shall not begin before daylight, unless prior approval is obtained from the authorized officer. Closed chamber DSTs may be accomplished day or night.

A DST that flows to the surface with evidence of hydrocarbons shall be either reversed out of the testing string under controlled surface conditions. This would involve provided some means for reverse circulation.

Separation equipment required for the anticipated recovery shall be properly installed before a test starts.

All engines within 100 feet of the wellbore that are required to "run" during the test shall have spark arresters or water cooled exhausts.



- b. The logging program will consist of a Schlumberger Platform Express or equivalent to be run from TD to Base of Surface Casing.
- c. No cores are anticipated.
- d. Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. Two copies of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with form 3160-4. Samples (cutting, fluids, and/or gases) will be submitted when requested by the authorized officer (AO).
- e. The anticipated completion program is as follows: Perform multistage fracs and complete all productive Mesaverde and Wasatch sands present in wellbore. Produce all zones together.
- f. Daily drilling and completion progress reports shall be submitted to the BLM in Vernal on a weekly basis.

7. ABNORMAL TEMPERATURES OR PRESSURES

- a. The expected bottom hole pressure is 8040 psi. The maximum bottom hole temperature anticipated is 241 degrees F.
- b. No hydrogen sulfide gas is anticipated. Abnormal pressures will be controlled with mud weight and 5000# BOP and rotating head.

8. ANTICIPATED STARTING DATES AND NOTIFICATION OF OPERATIONS

- a. Drilling is planned to commence upon approval of this application.
- b. It is anticipated that the drilling of this well will take approximately 35 days.
- c. The BLM in Vernal, Utah shall be notified of the anticipated date of location construction commencement and of anticipated spud date.



- d. No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.
- e. The spud date will be reported orally to the AO within 48 hours after spudding. If the spudding occurs on a weekend or holiday, the report will be submitted on the following regular work day. The oral report will be followed up with a Sundry Notice.
- f. In accordance with Onshore Oil and Gas Order No. 1, this well will be reported on Form 3160-6 "Monthly Report of Operations", starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report will be filed with the Vernal BLM District Office, 170 South 500 East, Vernal, UT 84078.
- g. Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.
- h. If a replacement rig is contemplated for completion operations, a "Sundry Notice" Form 3160-5 to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.
- i. Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Such notification will be sent by telegram or other written communications, not later than 5 days following the date on which the well is placed on production.
- j. Pursuant to Onshore Order No. 7, with the approval of the District Engineer, produced water may be temporarily disposed of into unlined pits for a period of up to 90 days. During the period so authorized, an application for approval of the permanent disposal method, along with the required water analysis and other information, must be submitted to the District Engineer.
- k. Pursuant to NTL-4A, lessees or operators are authorized to vent/flare gas during initial well evaluation tests, not exceeding a period of 30 days or the production of 50 MMCF of gas, whichever occurs first. An application must be filed with the District Engineer and approval received, for any venting/flaring of gas beyond the initial 30 day or authorized test period.



- l. A schematic facilities diagram as required by 43 CFR 3162.7-5 (b.9.d.), shall be submitted to the appropriate District Office within sixty (60) days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-5 (b.4.).
- m. A first production conference will be scheduled within 15 days after receipt of the first production notice.
- n. No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the SO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within 30 days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.
- o. Pursuant to Onshore Oil and Gas Order No. 1, lessees and operators have the responsibility to see that their exploration, development, production, and construction operations are conducted in a manner which conforms with applicable Federal laws and regulations and with State and local laws and regulations to the extent that such State and local laws are applicable to operations on Federal or Indian lands.

Bureau of Land Management 170 South 500 East Vernal, Utah 84078		
Phone: 435/781-4400		Fax: 435/781-4410
After Hours:		
Matt Baker	Petroleum Engineer	435/828-4470
Michael Lee	Petroleum Engineer	435/828-7875



'APIWellNo:43013501800000'


Gasco
Energy
Utah Region

DRILLING PHASE
BOP Stack Diagram

River Bend Area Utah
DATE:
Rig:

NOTE: All lengths are in feet from RIG FLOOR.

Rig Floor

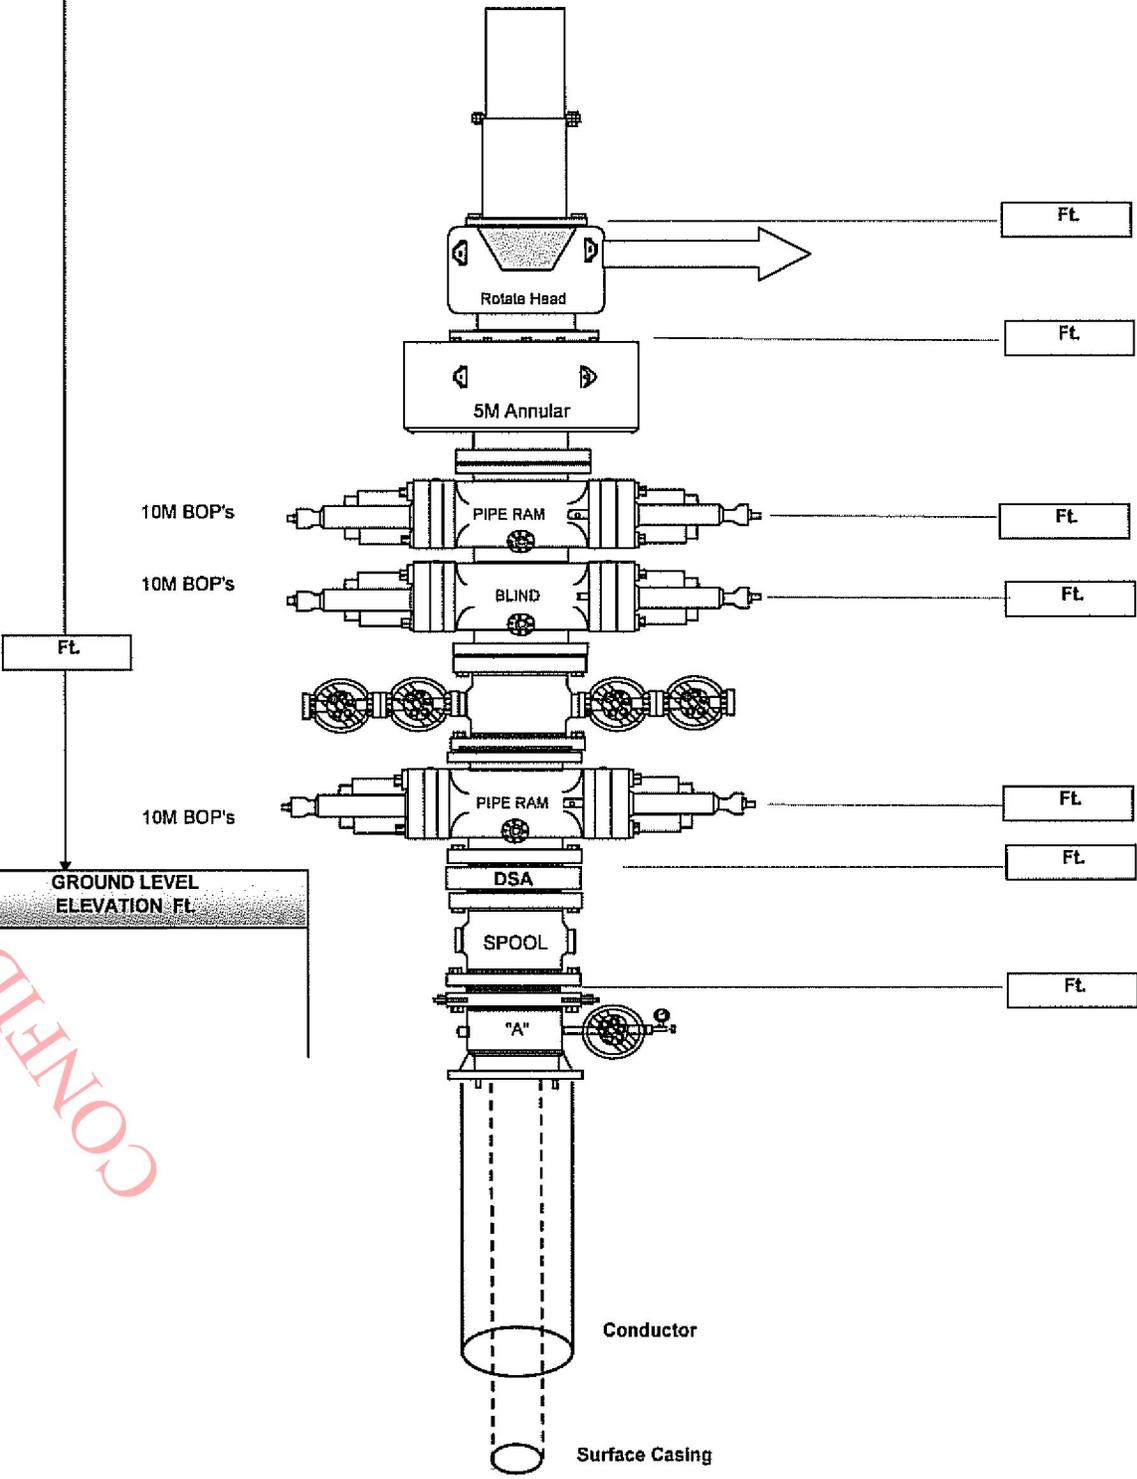


CONFIDENTIAL

10,000 psi Manifold

Adjustable Choke
(No Positive chokes in manifold)

To Shaker

Lead Filled Bull Plugs

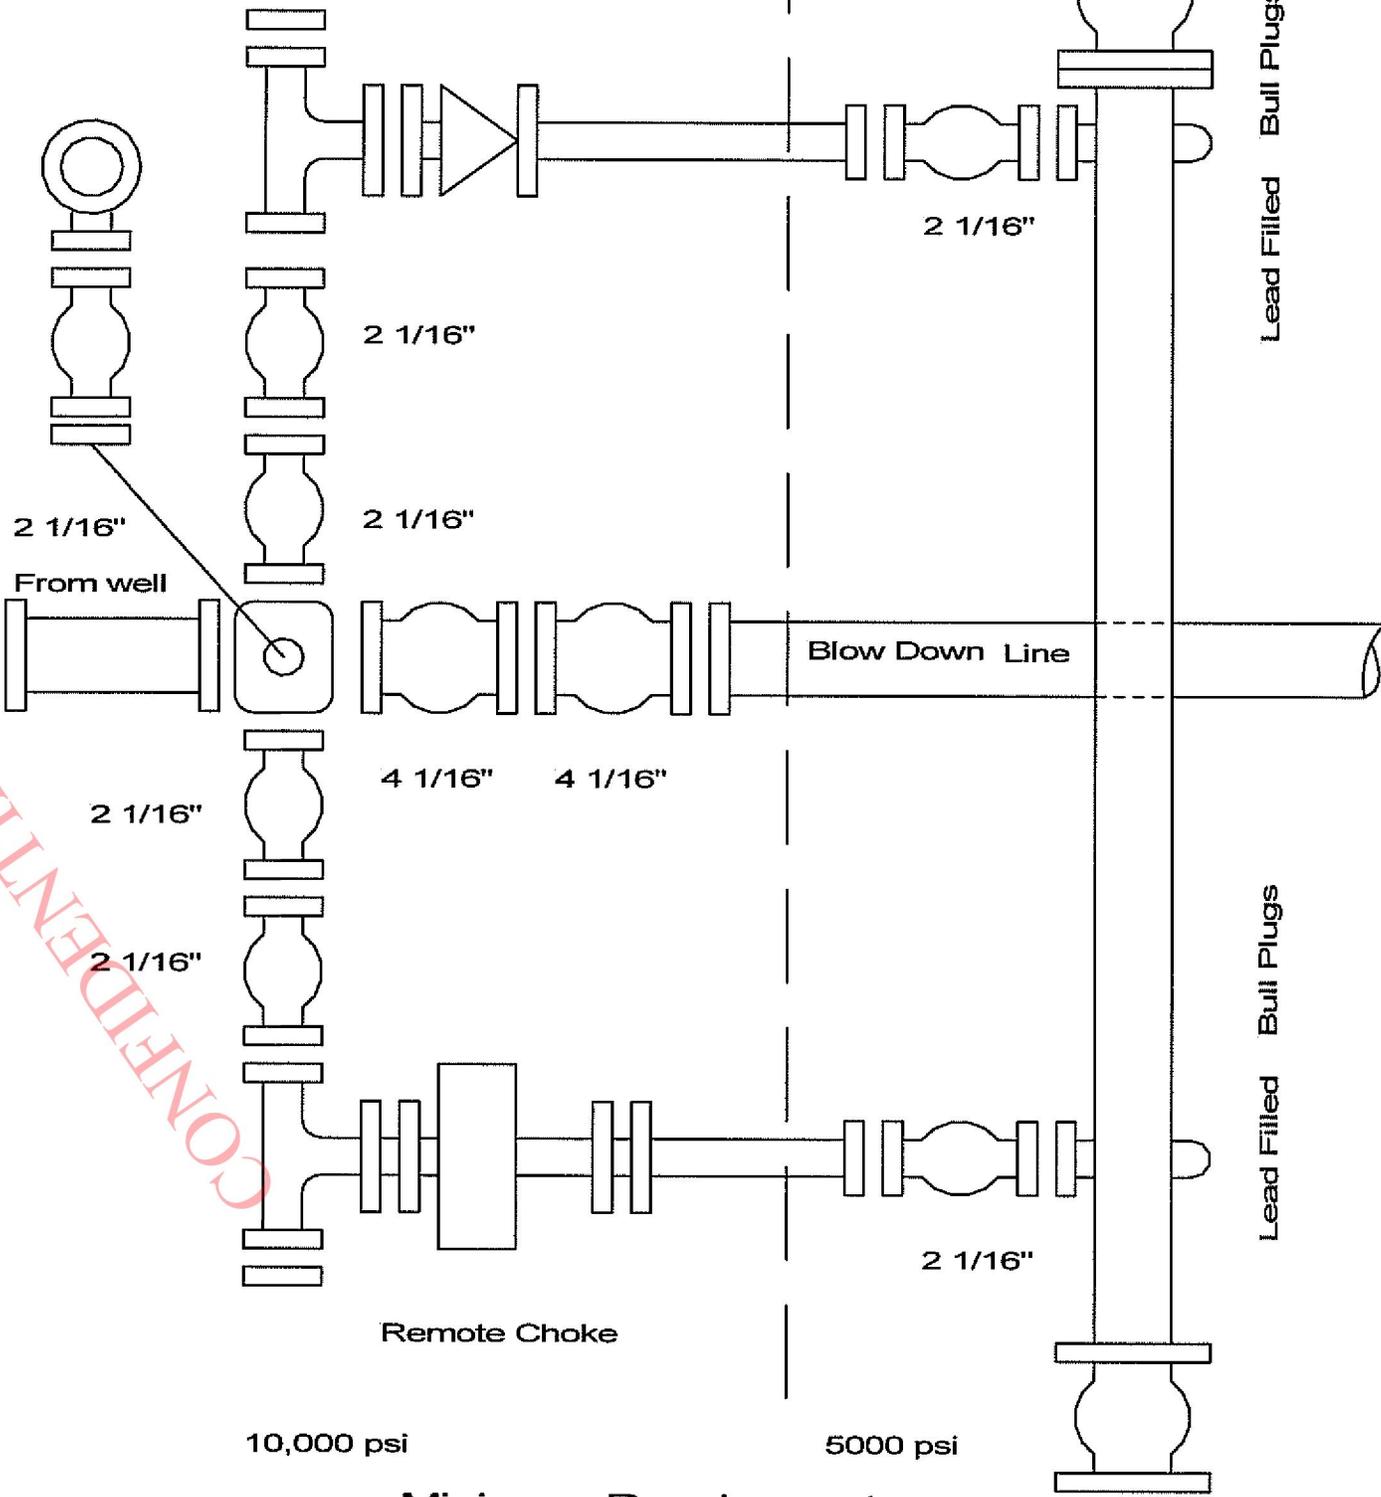

CONFIDENTIAL

**ONSHORE OIL & GAS ORDER NO. 1
NOTIFICATION REQUIREMENTS**

- Location Construction - forty-eight (48) hours prior to construction of location and access roads.
- Location Completion - prior to moving on the drilling rig.
- Spud Notice - at least twenty-four (24) hours prior to spudding the well.
- Casing String and Cementing - twenty-four (24) hours prior to running casing and cementing all casing strings.
- BOP and Related Equipment Tests - twenty-four (24) hours prior to initiating pressure tests.
- First Production - Notice within five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

The onsite inspection for the subject well site was conducted on Tuesday, October 4, 2005 at approximately 3:30 p.m. Weather conditions were cool, windy and overcast. In attendance at the onsite inspection were the following individuals:

Karl Wright	Natural Resource Specialist	Bureau of Land Management
Todd Megrath	Wildlife Biologist	SWCA
Venessa Langmacher	Permitting Agent	Permitco Inc.
Jesse Walton	Surveyor	Uintah Engineering and Land Surveying
Caleb Rounsaville	Field Supervisor	Gasco Production Company

1. **EXISTING ROADS**

- a. The proposed well site is located approximately 23.4 miles south of Myton, Utah.



'APIWellNo:43013501800000'

- b. Directions to the location from Myton, Utah are as follows:

Proceed in a southeasterly direction from Myton, Utah for approximately 12.7 miles to the Castle Peak Mine. Stay right and continue southerly for 6.6 miles to a fork in the road. Turn right and proceed southwesterly for 1.2 miles until reaching a second fork in the road. Turn right and proceed southwesterly 2.1 miles. Turn right onto the proposed new access and proceed westerly 0.8 miles until reaching the proposed location.

- c. For location of access roads within a 2-Mile radius, see Maps A & B.
- d. Improvement to existing main roads will not be required.
- e. All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.
- f. Existing roads and newly constructed roads on surface under the jurisdiction of any Surface Managing Agency shall be maintained in accordance with the standards of the SMA.

2. PLANNED ACCESS ROADS

- a. There will be 0.8 miles of new access to be constructed.
- b. The maximum grade is approximately 5%.
- c. No turnouts are planned.
- d. No low water crossings or culverts will be necessary.
- e. The access road was centerline surveyed at the time of staking.
- f. The use of surfacing material is not anticipated, however it may be necessary depending on weather conditions.
- g. No cattle guards will be necessary.



- h. Surface disturbance and vehicular travel will be limited to the approved location and approved access route. Any additional area needed will be approved in advance.
- i. Access roads and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development, (1989).
- j. The road will be constructed/upgraded to meet the standards of the anticipated traffic flow and all weather road requirements. Construction/upgrading shall include ditching, draining, graveling, crowing and capping the roadbed as necessary to provide a well constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot right-of-way will not be allowed. Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.
- k. No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.
- l. No federal right of ways will be necessary because all access is within the Wilkin Ridge Unit.
- m. A road and pipeline easement will be requested from SITLA for the portion of road/pipeline located in Section 16, T10S - R17E.

3. LOCATION OF EXISTING WELLS WITHIN A 1-MILE RADIUS OF THE PROPOSED LOCATION.
(See Map "C")

- a. Water wells - none
- b. Injection wells - none
- c. Producing wells - two



- d. Drilling wells - none
- e. Shut-in wells - none
- f. Temporarily abandoned wells - none
- g. Disposal wells -none
- h. Abandoned wells - one
- i. Dry Holes - none

4. LOCATION OF TANK BATTERIES AND PRODUCTION FACILITIES.

- a. All permanent structures (onsite for six months or longer) constructed or installed (including oil well pump jacks) will be painted Carlsbad Canyon. All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded.
- b. If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall surrounded by a containment dike of sufficient capacity to contain at a minimum, the entire contents of the largest tank within the facility/battery, unless more stringent protective requirements are deemed necessary by the authorized officer.
- c. If production is established, a production facility diagram will be submitted via Sundry Notice.
- d. All loading lines will be placed inside the berm surrounding the tank battery.
- e. Gas meter runs for each well will be located within 500 feet of the wellhead. The gas flow line will be buried or anchored down from the wellhead to the separator. Meter runs will be housed and/or fenced.
- f. The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries. Tests for meter accuracy will be conducted monthly for the first three months on new meter installations and at least quarterly thereafter. The AO will be provided with a date and time for the initial meter



calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal Field Office. All meter measurement facilities will conform with Onshore Oil and Gas Order No. 4 for liquid hydrocarbons and Onshore Oil and Gas Order No. 5 for natural gas measurement.

- g. If at any time the facilities located on public land and authorized by the terms of the lease are no longer included in the lease (due to a contraction in the unit or other lease or unit boundary change), BLM will process a change in authorization to the appropriate statute. The authorization will be subject to appropriate rental or other financial obligation as determined by the authorized officer.
- h. Any necessary pits will be properly fenced to prevent any wildlife entry.
- i. All site security guidelines identified in 43 CFR 3162.7 regulations will be adhered to.
- j. All off-lease storage, off-lease measurement, or commingling on-lease or off-lease will have prior written approval from the District Manager.
- k. All access roads will be maintained as necessary to prevent erosion and accommodate year-round traffic.
- l. The road will be maintained in a safe useable condition.
- m. Produced water will be stored in a 300 bbl heated, insulated tank, then hauled to a commercial disposal site such as Disposal Inc., or Brennan Bottom.
- n. Pipelines will follow the route shown on Map D. See Pipeline detail attached.

5. LOCATION AND TYPE OF WATER SUPPLY

- a. The proposed water source will be the Nebecker Water Station in Myton. The Water Use Claim # is 43-1721.
- b. Water will be hauled by Nebecker Water Service to the location over the access roads shown on Maps A and B.
- c. No water well will be drilled on this lease.



'APIWellNo:43013501800000'

CONFIDENTIAL

6. SOURCE OF CONSTRUCTION MATERIAL

- a. Surface and subsoil materials in the immediate area will be utilized.
- b. Any gravel used will be obtained from a commercial source.
- c. The use of materials under BLM jurisdiction will conform with 43 CFR 3610.2.3. Construction material will not be located on lease.
- d. No construction materials will be removed from Federal land.

7. METHODS OF HANDLING WASTE DISPOSAL

- a. The reserve pit will be constructed so as not to leak, break, or allow discharge.
- b. At the request of the BLM, the reserve pit will be lined with a 12 mil liner. If fractured rock is encountered, the pit will be first lined with sufficient bedding (either straw or dirt) to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash, scrap pipe, etc., that could puncture the liner will be disposed of in the pit. More stringent protective requirements may be deemed necessary by the A.O.
- c. Burning will not be allowed. All trash will be contained in a trash cage and its contents removed at the end of drilling operations and hauled to an approved disposal sight.
- d. After first production, produced waste water will be confined to a unlined pit or storage tank for a period not to exceed ninety (90) days. During the 90-day period, in accordance with Onshore Order No. 7, an application for approval of a permanent disposal method and location, along with the required water analysis, will be submitted for the AO's approval. Failure to file an application within the time allowed will be considered an incident of noncompliance.
- e. Drill cuttings are to be contained and buried in the reserve pit.
- f. Any salts and/or chemicals which are an integral part of the drilling system will be disposed of in the same manner as the drilling fluid.
- g. A chemical porta-toilet will be furnished with the drilling rig.



CONFIDENTIAL

- h. The produced fluids will be produced into a test tank until such time as construction of production facilities is completed. Any spills of oil, gas salt water or other produced fluids will be cleaned up and removed.

8. ANCILLARY FACILITIES

There are no airstrips, camps, or other facilities planned during the drilling of the proposed well.

9. WELL SITE LAYOUT

- a. The operator or his/her contractor shall contact the BLM Office at 435/781-4400 forty-eight (48) hours prior to construction activities.
- b. The reserve pit will be located on the northwest side of the location.
- c. The flare pit will be located on the east side of the reserve pit, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.
- d. The stockpiled topsoil (first six inches) will be stored on the south side of the location, between Corners 9 and 2. Topsoil along the access route will be wind rowed on the uphill side.
- e. Access to the well pad will be from the east as shown on the Pit & Pad Layout.
- f. See Location Layout for orientation of rig, cross section of drill pad and cuts and fills.
- g. The location of mud tanks; reserve pit, trash cage; pipe racks; living facilities and soil stockpiles will be shown on the Location Layout.
- h. All pits will be fenced according to the following minimum standards:
- 39 inch net wire shall be used with at least one strand or barbed wire on top of the net wire (barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
 - The net wire shall be no more than 2-inches above the ground. The barbed wire shall be 3-inches above the net wire. Total height of the fence shall be at least 42-inches.



3. Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.
4. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.
5. All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.
 - i. The reserve pit fencing will be on three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until cleanup.

10. PLANS FOR RESTORATION OF SURFACE

Producing Location

- a. Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash and junk not required for production.
- b. Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with 43 CFR 3162.7-1.
- c. If a plastic nylon reinforced liner is used it shall be torn and perforated before backfilling of the reserve pit.
- d. The reserve pit and that portion of the location not needed for production facilities or operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 120 days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed and all cans, barrels, pipe, etc., will be removed.
- e. Reclamation of unused disturbed areas on the well pad/access road no longer needed for operations, such as cut slopes, and fill areas will be accomplished by grading, leveling and seeding as recommended by the Authorized Officer. The following seed mixture has been requested by the Bureau of Land Management.



<i>Species</i>	<i>Pounds PLS/Acres</i>
Indian Ricegrass	4
High Crested Wheatgrass	4
Needlegrass	4
Threadgrass	4
TOTAL	12

Seeding will be performed immediately after the location has been reclaimed and the pit has been backfilled, regardless of the time of year. Seed will be broadcast and walked in with a dozer.

- f. The topsoil stockpile will be seeded as soon as the location has been constructed with the same recommended seed mix. The seed will be walked in with a cat.

Dry Hole

- g. At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and BLM will attach the appropriate surface rehabilitation conditions of approval.

Interim Surface Reclamation will be as follows:

1. Immediately after final well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production operations.
2. Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in the reserve pit will be removed. Other waste and spoil materials will be disposed of immediately, weather permitting, upon final well completion.
3. If a synthetic, nylon re-enforced, liner is used, the excess liner will be cut off and removed and the remaining liner will be torn and perforated while backfilling the reserve pit. Alternatively, the pit will be pumped dry, the liner folded into the pit, and the pit backfilled. The liner will be buried to a minimum of four (4) feet deep.



'APIWellNo:43013501800000'

4. The reserve pit will be reclaimed within 180 days from the date of final well completion, weather permitting.
5. The reserve pit and that portion of the location not needed for production and storage facilities, and everyday production operations, will be reshaped to the approximate original contours to the extent possible. This will be completed by backfilling and crowning the pit to prevent water from standing. Topsoil will be re-spread up to the rig anchor points, excluding the area needed for production and storage facilities and everyday production operations. Re-seeding, using appropriate reclamation methods, will occur immediately following the re-spreading of topsoil, weather permitting. The Authorized Officer will provide a seed mixture to re-vegetate the reserve pit and other unused disturbed areas at the time of the onsite.

11. SURFACE OWNERSHIP

Access Roads - The majority of the access roads are maintained by the County Road Department or the Bureau of Land Management.

Well pad - The well pad is located on lands managed by the BLM.

12. OTHER INFORMATION

a. A Class III archeological survey will be conducted by Grand River Institute. A copy of this will be submitted to the appropriate agencies by Grand River Institute.

b. The operator is responsible for informing all persons in the areas who are associated with this project that they will be subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator is to immediately stop work that might further disturb such materials, and contact the authorized officer (AO). Within five working days the AO will inform the operator as to:

-whether the materials appear eligible for the National Register of Historic Places;

-the mitigation measures the operator will likely have to undertake before the site can be used (assuming in situ preservation is not necessary); and



'APIWellNo:43013501800000'

-a time frame for the AO to complete and expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate. If the operator wishes, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials may be required. Otherwise, the operator will be responsible for mitigation costs. The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

- c. The operator will control noxious weeds along rights-of-way for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds may be obtained from the BLM, or the appropriate County Extension Office. On BLM administered land it is required that a Pesticide Use Proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.
- d. Drilling rigs and/or equipment used during drilling operations on this wellsite will not be stacked or stored on Federal Lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure.
- e. All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved plan of operations, and any applicable Notice to Lessees. The operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished the field representative to insure compliance.
- f. A complete copy of the approved APD shall be on location during construction of the location and drilling activities.
- g. There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All wells, whether drilling, producing, suspended or abandoned will be identified in accordance with 43 CFR 3162.
- h. "Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.



ONSHORE ORDER NO. 1
Gasco Production Company
Wilkin Ridge Federal #32-17-10-17
1978' FNL and 1972' FEL
SW NE Section 17, T10S - R17E
Duchesne County, Utah

CONFIDENTIAL - TIGHT HOLE

Lease No. UTU-75082

SURFACE USE PLAN

Page 12

- i. This permit will be valid for a period of one year from the date of approval. An extension period may be granted, if requested, prior to the expiration of the original approval period. After permit termination, a new application will be filed for approval for any future operations.
- j. The operator or his contractor shall contact the BLM Offices at 435/781-4400 48 hours prior to construction activities.
- k. The BLM Office shall be notified upon site completion prior to moving on the drilling rig.

13. LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION

Permit Matters

Gasco Production Company
8 Inverness Drive East, Suite 100
Englewood CO 80112
Roger Knight
303-483-0044 (O)
303-483-0011 (F)
rknight@gascoenergy.com

Drilling & Completion Matters

Gasco Production Company
8 Inverness Drive East, Suite 100
Englewood, CO 80112
John Longwell
303/483-0044 (O)
303/ 483-0011(F)

Shawn Elworthy
Roosevelt, UT
(Cell) 435-823-4272

CERTIFICATION

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and, that the work associated with the operations proposed herein will be performed by GASCO Energy, Inc. and its contractors and subcontractors in conformity with the plan and the terms and conditions under which it is approved.

This statement is subject to the provisions of 18.U.S.C. 1001 for the filing of a false statement.

October 27, 2005
Date:

Venessa Langmacher

Venessa Langmacher - PERMITCO INC.
Authorized Agent for:
Gasco Production Company



'APIWellNo:43013501800000'

PIPELINE INFORMATION
Wilkin Ridge Federal #32-17-10-17

1. The type of pipeline is a single well flow line.
2. The outside diameter (O.D.) of all will be 8 inches maximum.
3. The anticipated production through the line is approximately 2000 MCF per day.
4. The anticipated maximum test pressure is 1000 psi.
5. The anticipated operating pressure is 100-200 psi.
6. The type of pipe is steel.
7. The method of coupling is welded.
8. The pipeline will be laid on surface because of the extremely rocky surface.
9. There are no other pipelines to be associated in same right of way.
10. There will be other objects to be associated in the same right of way. (Risers, Pig Launchers Pig Traps, meters and other appurtenances as required.)
11. The total length of pipeline is approximately 7900 feet (2100' State Land, 5800' BLM Land) - see Map D.
12. The line will be laid on surface as shown on Map D. The pipeline will follow existing or proposed roads.
13. The construction width for total surface disturbing activities is 30 feet.
14. The estimated total acreage involving all surface disturbing activities is 5.4 acres.
15. Any surface disturbance created as a result of the pipeline construction will be reclaimed utilizing the reclamation procedures and seed mixture specified by the Bureau of Land Management.
16. The line will be tested with gas pressure to 1000 psi.



APIWELLNO:43013501800000

T10S, R17E, S.L.B.&M.

GASCO PRODUCTION COMPANY


Well location, WILKIN RIDGE FEDERAL #32-17-10-17, located as shown in the SW 1/4 NE 1/4 of Section 17, T10S, R17E, S.L.B.&M. Duchesne County, Utah.

BASIS OF ELEVATION

SPOT ELEVATION IN THE SW 1/4 OF SECTION 20, T10S, R17E, S.L.B.&M. TAKEN FROM THE WILKIN RIDGE QUADRANGLE, UTAH, DUCHESNE COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 6275 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

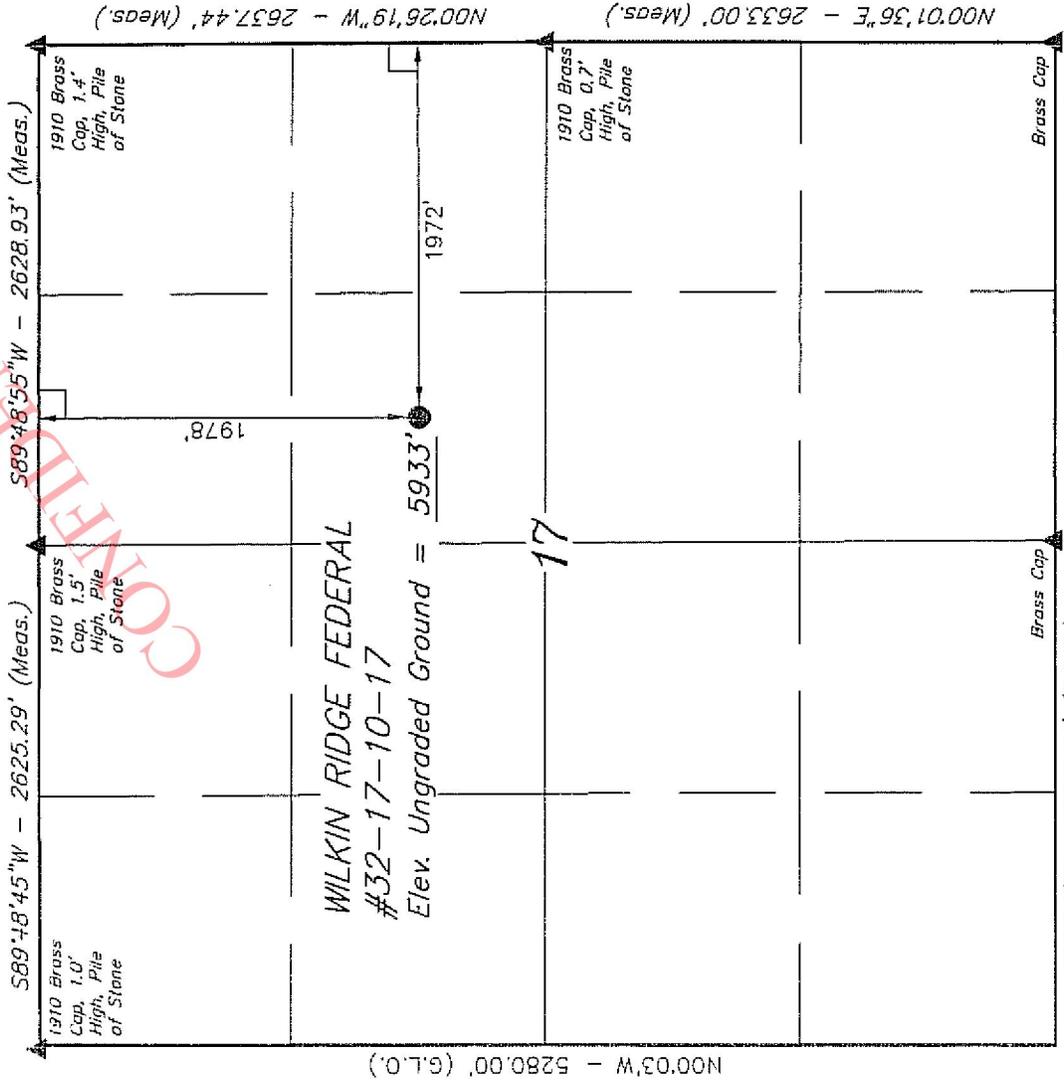

(AUTONOMOUS NAD 83)
 LATITUDE = 39°56'44.58" (39.945717)
 LONGITUDE = 110°01'40.48" (110.027911)
 (AUTONOMOUS NAD 27)
 LATITUDE = 39°56'44.71" (39.945753)
 LONGITUDE = 110°01'37.94" (110.027206)

LEGEND:

- = 90° SYMBOL
- ⊙ = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.



SCALE


CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

[Signature]
 REGISTERED LAND SURVEYOR
 REGISTRATION NO. 161319
 STATE OF UTAH

UNTAH ENGINEERING & LAND SURVEYING
 85 SOUTH 200 EAST - VERNAL, UTAH 84078
 (801) 789-1017

SCALE	DATE SURVEYED:	DATE DRAWN:
1" = 1000'	09-19-05	09-28-05
PARTY	FILE	REFERENCES
J.W. C.W. L.K.	G.L.O. PLAT	
WEATHER		
WARM		GASCO PRODUCTION COMPANY

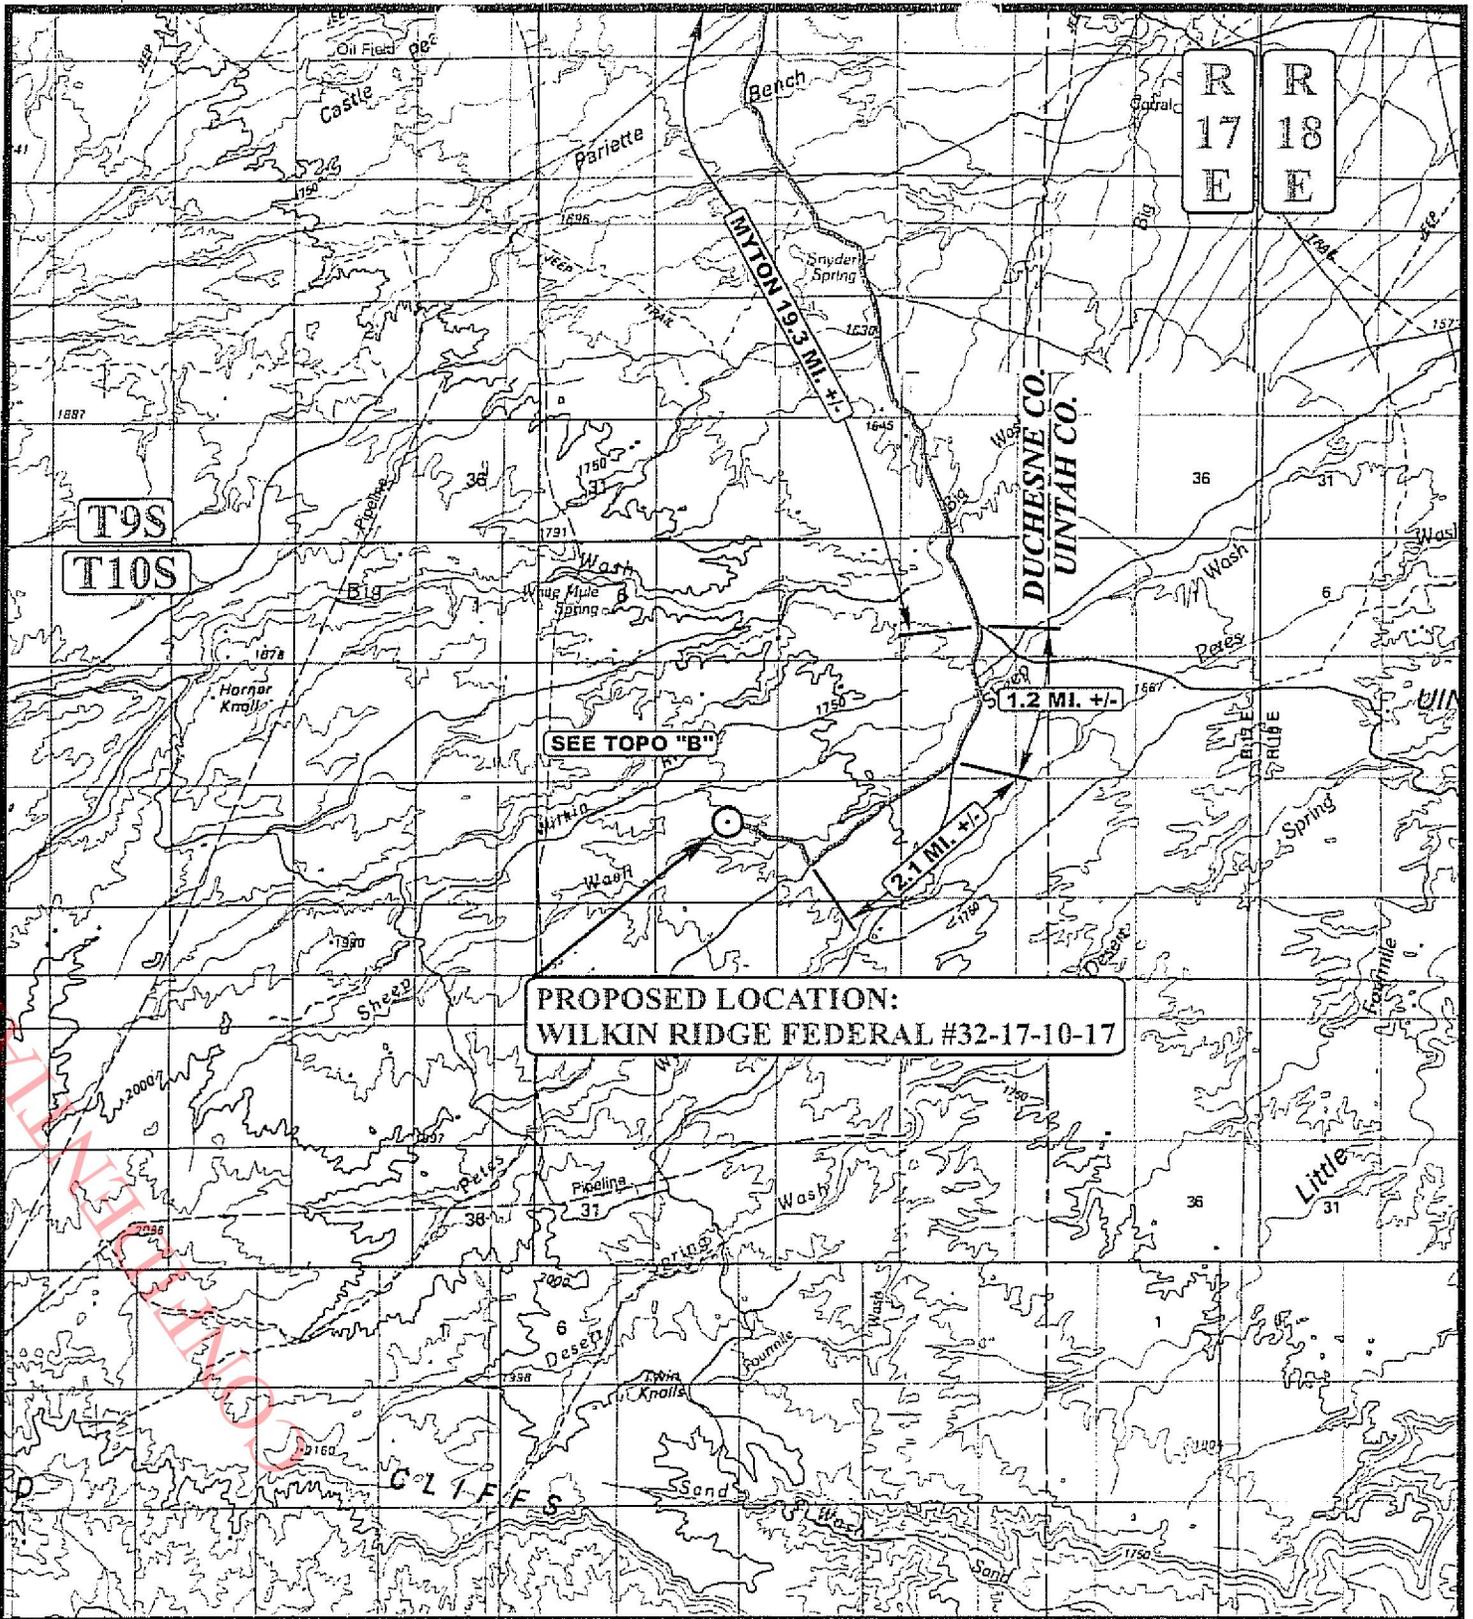

**PROPOSED LOCATION:
WILKIN RIDGE FEDERAL #32-17-10-17**

LEGEND:

○ PROPOSED LOCATION



GASCO PRODUCTION COMPANY

**WILKIN RIDGE FEDERAL #32-17-10-17
SECTION 17, T10S, R17E, S.L.B.&M.
1978' FNL 1972' FEL**




Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**

09 26 05
MONTH DAY YEAR



SCALE: 1:100,000 DRAWN BY: C.P. REVISED: 00-00-00

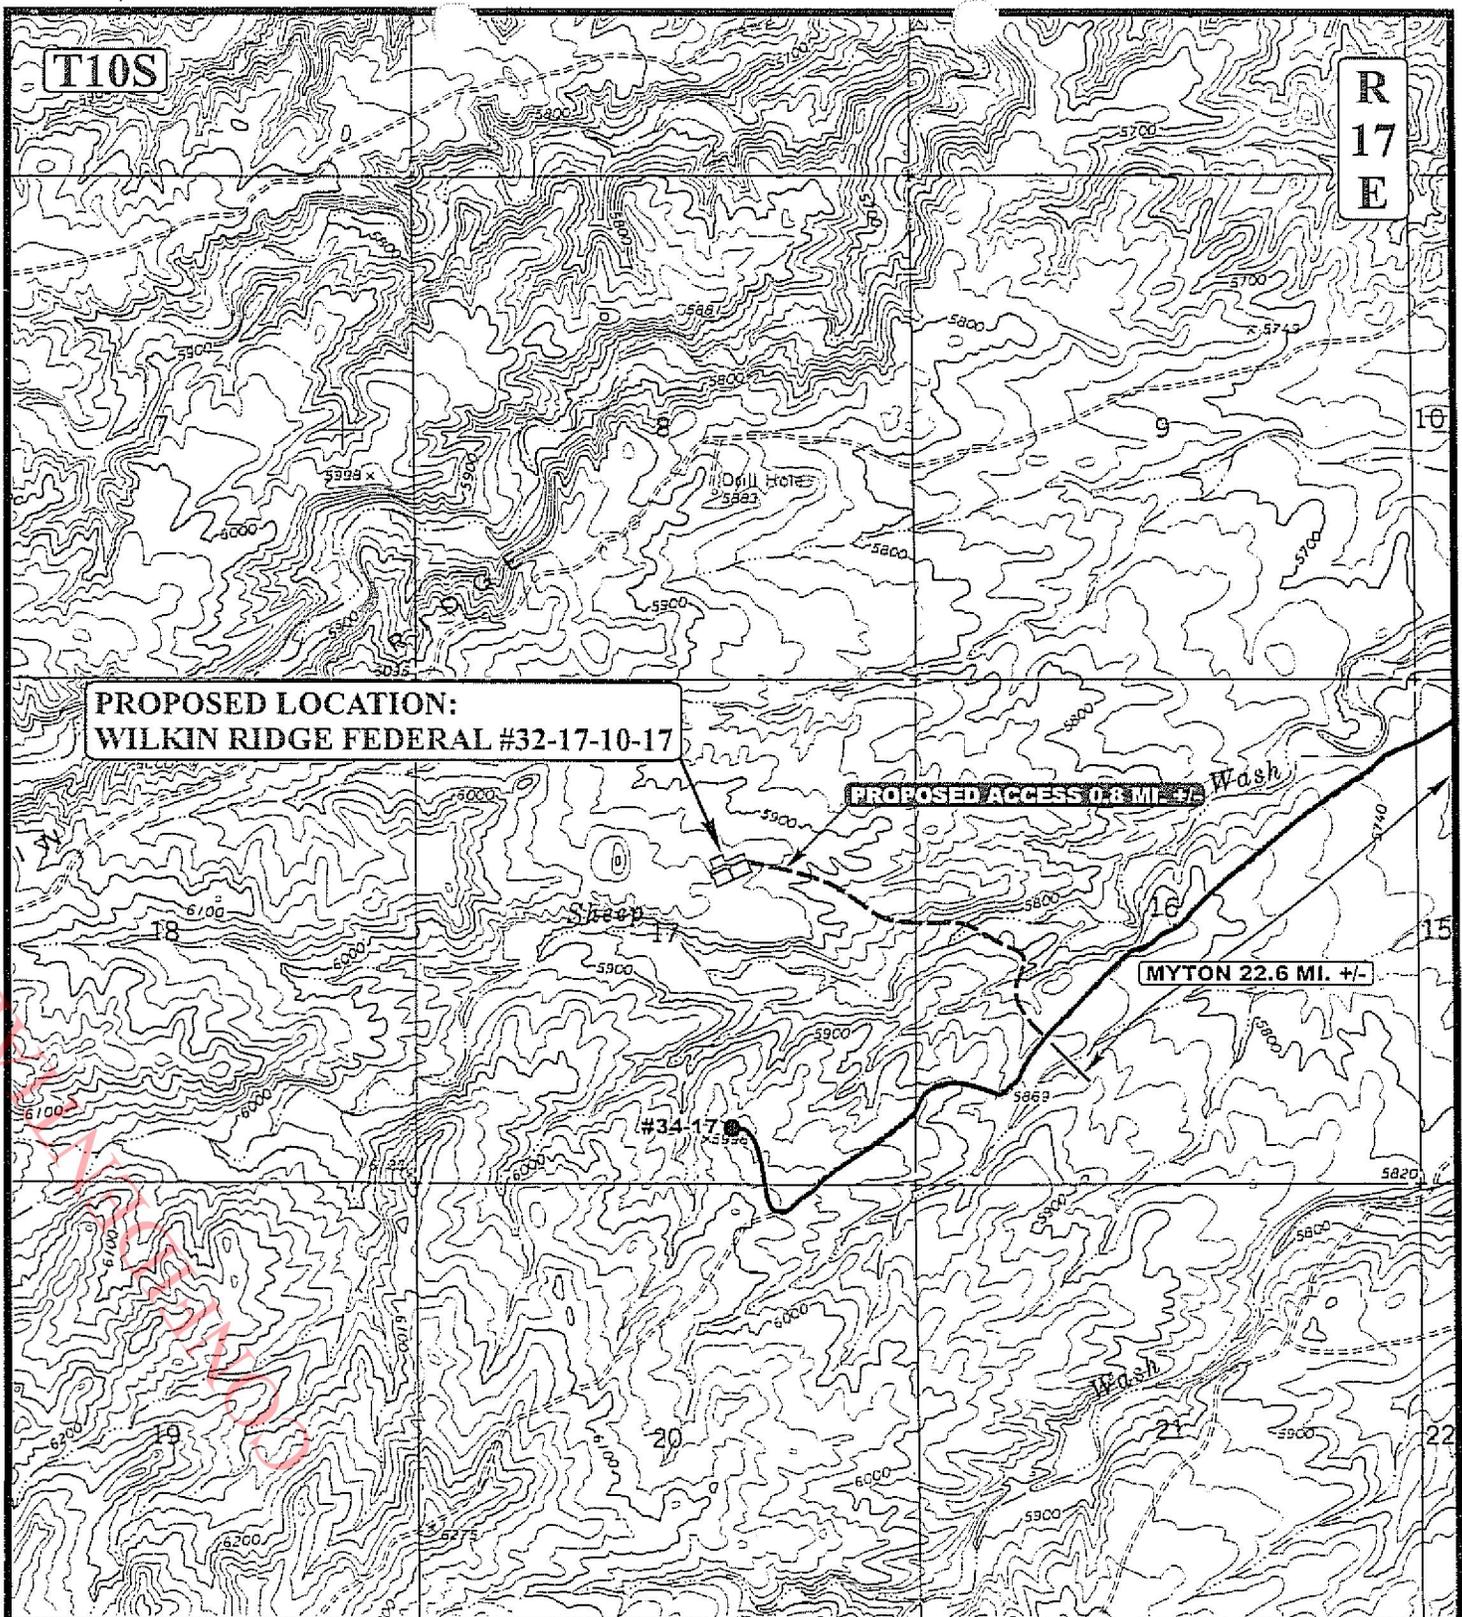

**PROPOSED LOCATION:
WILKIN RIDGE FEDERAL #32-17-10-17**

PROPOSED ACCESS ROAD 0.4 MI. +/-

MYTON 22.6 MI. +/-

LEGEND:

- EXISTING ROAD
- - - - - PROPOSED ACCESS ROAD



**GASCO PRODUCTION COMPANY
WILKIN RIDGE FEDERAL #32-17-10-17
SECTION 17, T10S, R17E, S.L.B.&M.
1978' FNL 1972' FEL**



Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813


**TOPOGRAPHIC
MAP**

09	26	05
MONTH	DAY	YEAR

SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 10-10-05



APIWellNo: 43013501800000

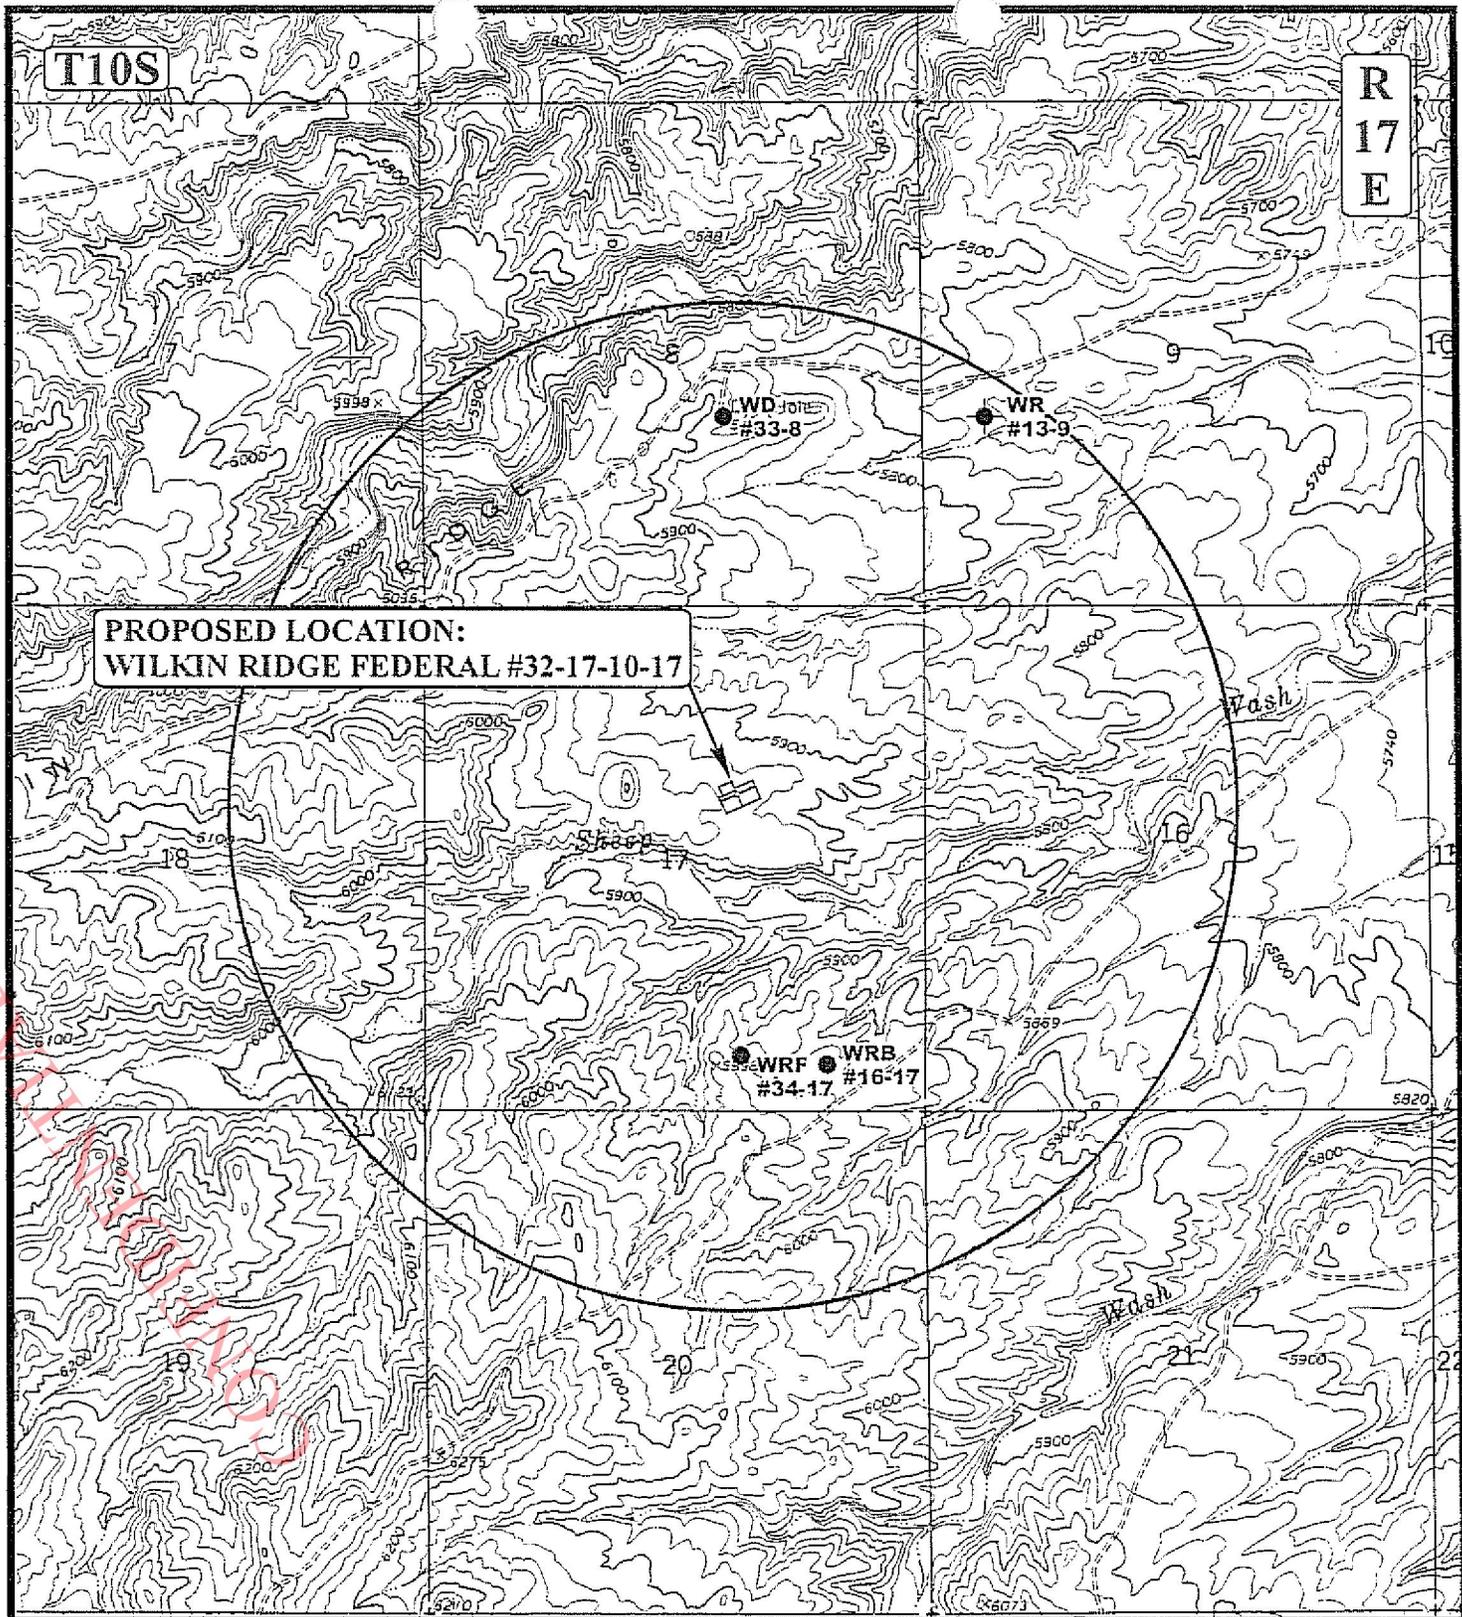


**PROPOSED LOCATION:
WILKIN RIDGE FEDERAL #32-17-10-17**

LEGEND:

- ∅ DISPOSAL WELLS
- PRODUCING WELLS
- SHUT IN WELLS
- ∅ WATER WELLS
- ABANDONED WELLS
- TEMPORARILY ABANDONED



Utah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



GASCO PRODUCTION COMPANY
WILKIN RIDGE FEDERAL #32-17-10-17
SECTION 17, T10S, R17E, S.L.B.&M.
1978' FNL 1972' FEL


TOPOGRAPHIC
MAP

09 26 05
 MONTH DAY YEAR

SCALE: 1" = 2000' | DRAWN BY: C.P. | REVISED: 00-00-00



APIWellNo: 43013501800000

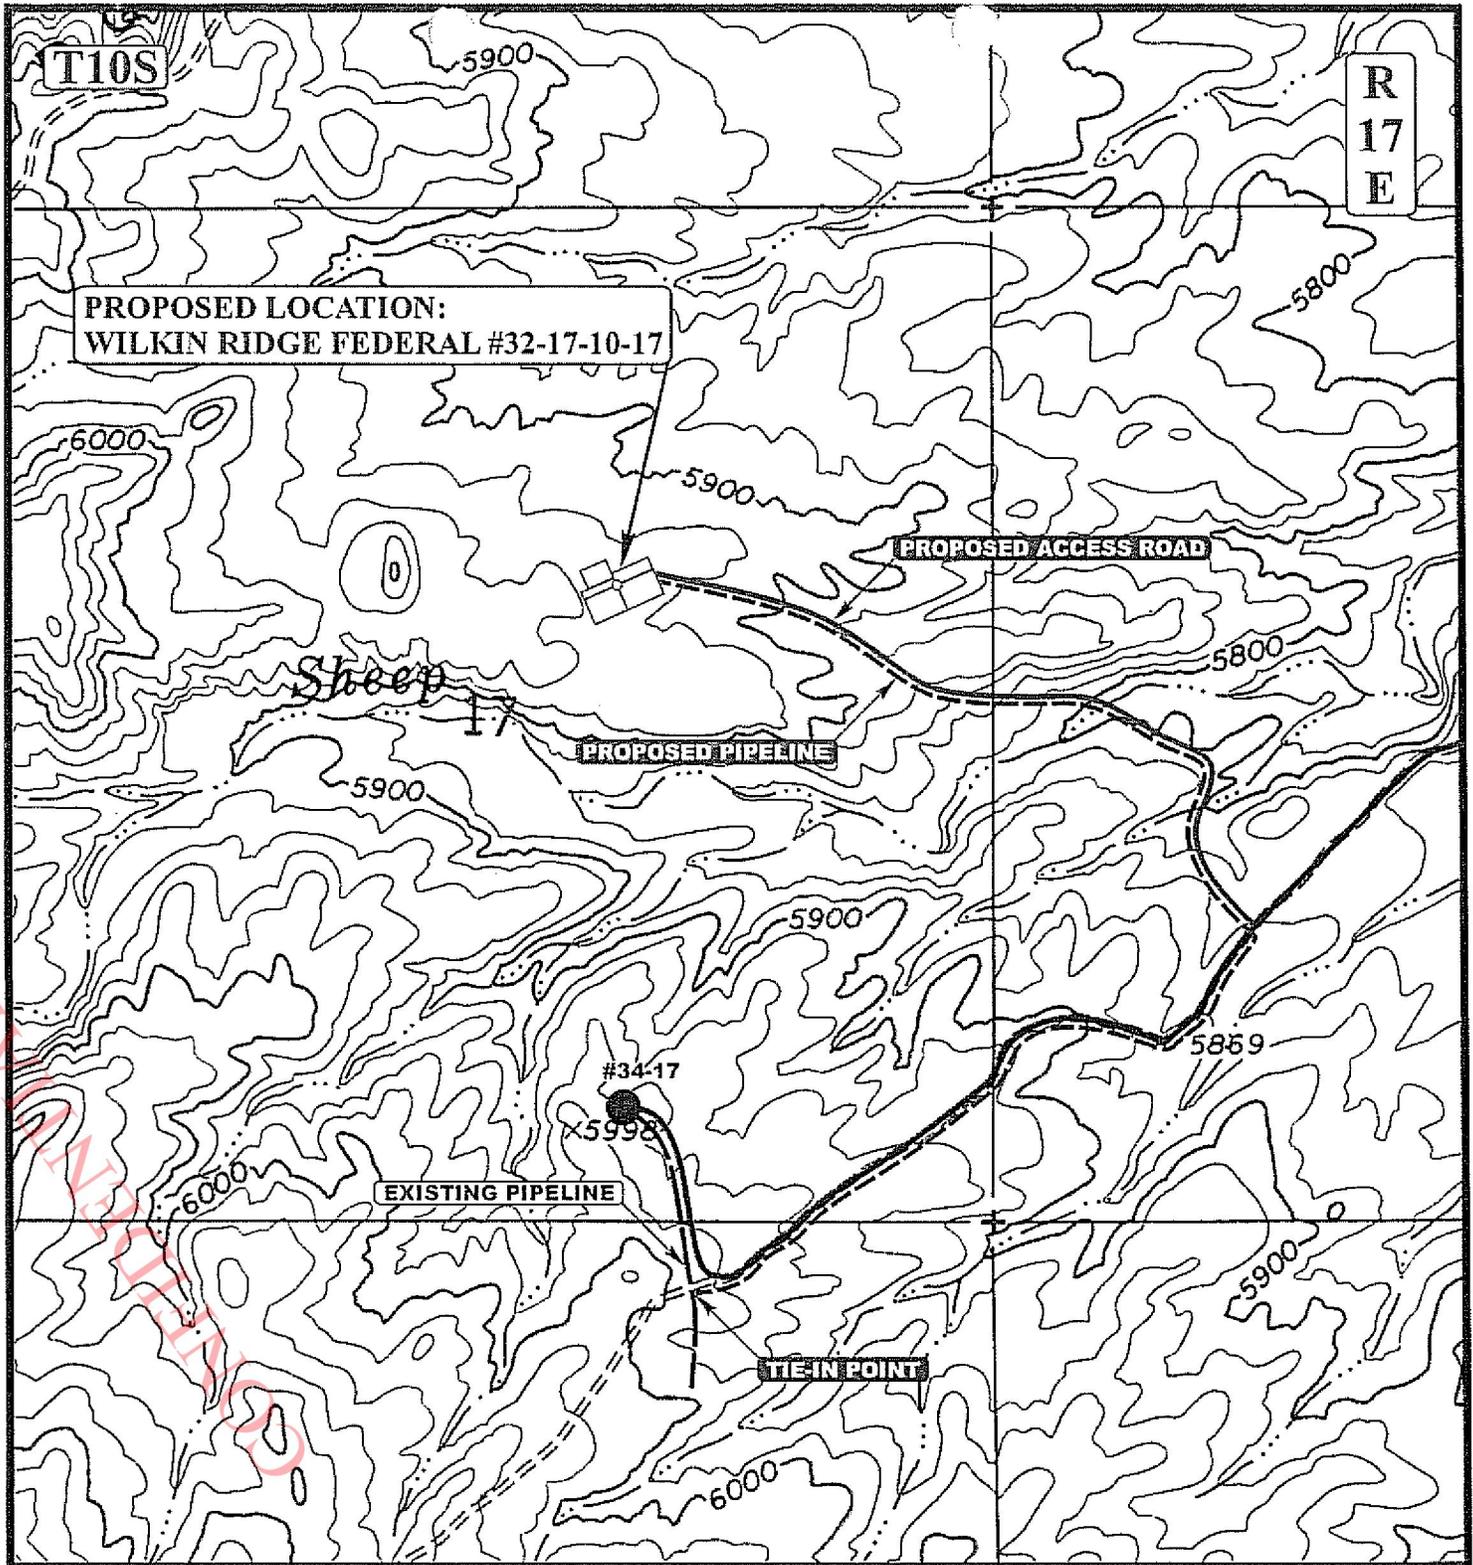

APPROXIMATE TOTAL PIPELINE DISTANCE = 7,900' +/-

LEGEND:

-  PROPOSED ACCESS ROAD
-  EXISTING PIPELINE
-  PROPOSED PIPELINE



GASCO PRODUCTION COMPANY

WILKIN RIDGE FEDERAL #32-17-10-17
SECTION 17, T10S, R17E, S.L.B.&M.
1978' FNL 1972' FEL



Utah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

09	26	05
MONTH	DAY	YEAR

SCALE: 1" = 1000' | DRAWN BY: C.P. | REVISED: 10-25-05





'APIWellNo:43013501800000'

API Number: 4301350180
Well Name: wilkin ridge federal 32-17-10-17
Township 10.0 S Range 17.0 E Section 17
Meridian: SLBM
Operator: GASCO PRODUCTION COMPANY

Map Prepared:
 Map Produced by Diana Mason

- | | |
|---------------|------------------------------------|
| Units | Wells Query |
| STATUS | Status |
| ACTIVE | APD - Approved Permit |
| EXPLORATORY | DRL - Spudded (Drilling Commenced) |
| GAS STORAGE | GIW - Gas Injection |
| NF PP OIL | GS - Gas Storage |
| NF SECONDARY | LA - Location Abandoned |
| PI OIL | LOC - New Location |
| PP GAS | OPS - Operation Suspended |
| PP GEOTHERMAL | PA - Plugged Abandoned |
| PP OIL | PGW - Producing Gas Well |
| SECONDARY | POW - Producing Oil Well |
| TERMINATED | RET - Returned APD |
| Fields | SGW - Shut-in Gas Well |
| STATUS | SOW - Shut-in Oil Well |
| Unknown | TA - Temp. Abandoned |
| ABANDONED | TW - Test Well |
| ACTIVE | WDW - Water Disposal |
| COMBINED | WIW - Water Injection Well |
| INACTIVE | WSW - Water Supply Well |
| STORAGE | |
| TERMINATED | |
| Sections | |
| Township | |

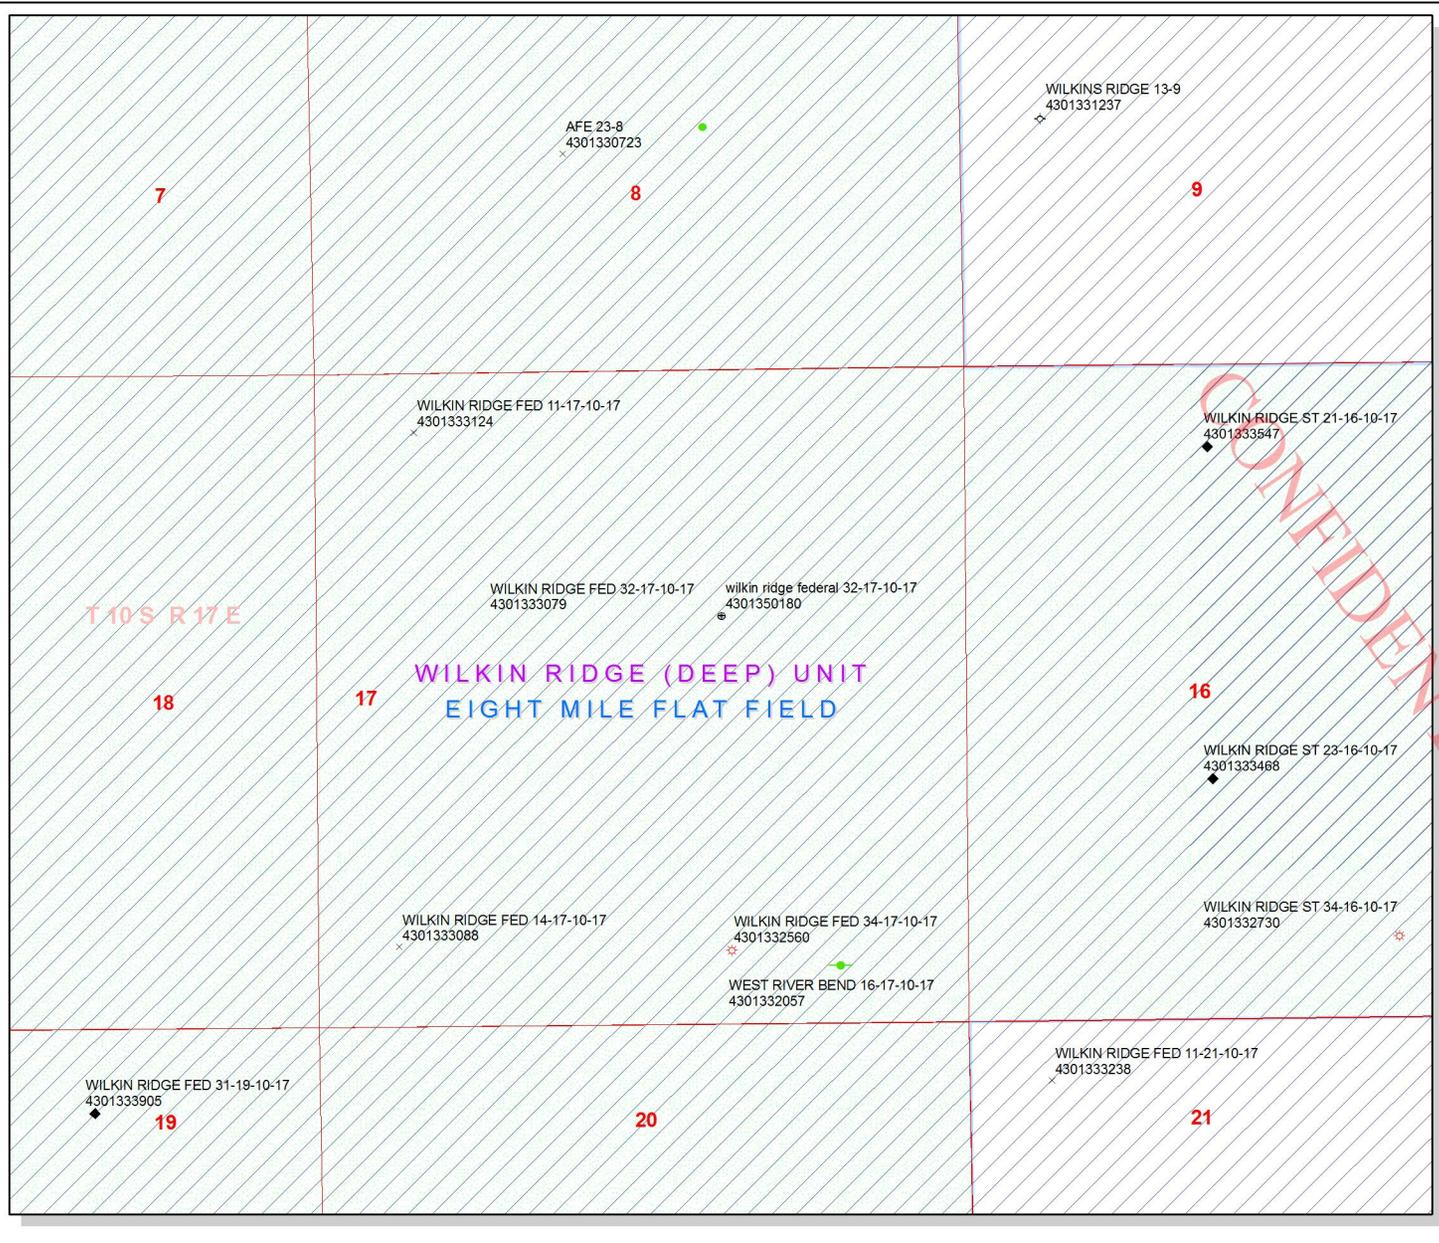

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office
P.O. Box 45155
Salt Lake City, Utah 84145-0155

IN REPLY REFER TO:
3160
(UT-922)

November 13, 2009

Memorandum

To: Assistant District Manager Minerals, Vernal District
From: Michael Coulthard, Petroleum Engineer
Subject: 2009 Plan of Development Wilkin Ridge Unit,
Duchesne and Uintah County, Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following well is planned for calendar year 2009 within the Wilkin Ridge Unit, Duchesne County, Utah.

API #	WELL NAME	LOCATION
(Proposed PZ BLACKHAWK)		
43-013-50180	Wilkin Ridge	32-17-10-17 Sec 17 T10S R17E 1978 FNL 1972 FEL

This office has no objection to permitting the well at this time.

/s/ Michael L. Coulthard

bcc: File - Wilkin Ridge Unit
Division of Oil Gas and Mining
Central Files
Agr. Sec. Chron
Fluid Chron

MCoulthard:mc:11-13-09

**WORKSHEET
APPLICATION FOR PERMIT TO DRILL**

APD RECEIVED: 11/6/2009

API NO. ASSIGNED: 43013501800000

WELL NAME: wilkin ridge federal 32-17-10-17

OPERATOR: GASCO PRODUCTION COMPANY (N2575)

PHONE NUMBER: 303 996-1803

CONTACT: Roger Knight

PROPOSED LOCATION: SWNE 17 100S 170E

Permit Tech Review:

SURFACE: 1978 FNL 1972 FEL

Engineering Review:

BOTTOM: 1978 FNL 1972 FEL

Geology Review:

COUNTY: DUCHESNE

LATITUDE: 39.94575

LONGITUDE: -110.02724

UTM SURF EASTINGS: 583104.00

NORTHINGS: 4421979.00

FIELD NAME: EIGHT MILE FLAT

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-75082

PROPOSED PRODUCING FORMATION(S): WASATCH-MESA VERDE

SURFACE OWNER: 1 - Federal

COALBED METHANE: NO

RECEIVED AND/OR REVIEWED:

- PLAT
- Bond: FEDERAL - UT-1233
- Potash
- Oil Shale 190-5
- Oil Shale 190-3
- Oil Shale 190-13
- Water Permit: #41-3530
- RDCC Review:
- Fee Surface Agreement
- Intent to Commingle

Commingling Approved

LOCATION AND SITING:

- R649-2-3.
Unit: WILKIN RIDGE DEEP
- R649-3-2. General
- R649-3-3. Exception
- Drilling Unit
Board Cause No: R649-3-2
- Effective Date:**
- Siting:**
- R649-3-11. Directional Drill

Comments: Presite Completed

Stipulations: 4 - Federal Approval - dmason
23 - Spacing - dmason



GARY R. HERBERT
Governor

GREGORY S. BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: wilkin ridge federal 32-17-10-17
API Well Number: 43013501800000
Lease Number: UTU-75082
Surface Owner: FEDERAL
Approval Date: 11/25/2009

Issued to:

GASCO PRODUCTION COMPANY, 8 Inverness Dr. East, Suite 100, Englewood, CO 80112

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of R649-3-2. The expected producing formation or pool is the WASATCH-MESA VERDE Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

- Within 24 hours following the spudding of the well – contact Carol Daniels at 801-538-5284 (please leave a voicemail message if not available)

OR

submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at <https://oilgas.ogm.utah.gov>

Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) – due within 5 days of spudding the well
- Monthly Status Report (Form 9) – due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) – due prior to implementation
- Written Notice of Emergency Changes (Form 9) – due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) – due prior to implementation
- Report of Water Encountered (Form 7) – due within 30 days after completion
- Well Completion Report (Form 8) – due within 30 days after completion or plugging

Approved By:

A handwritten signature in black ink, appearing to read "Gil Hunt", written in a cursive style.

For Gil Hunt
Associate Director, Oil & Gas

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

5. LEASE DESIGNATION AND SERIAL NUMBER:
UTU-75082

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:
WILKIN RIDGE DEEP

1. TYPE OF WELL
Gas Well

8. WELL NAME and NUMBER:
WILKIN RIDGE FED 32-17-10-17

2. NAME OF OPERATOR:
GASCO PRODUCTION COMPANY

9. API NUMBER:
43013501800000

3. ADDRESS OF OPERATOR:
8 Inverness Dr. East, Suite 100, Englewood, CO, 80112

PHONE NUMBER:
303 483-0044 Ext

9. FIELD and POOL or WILDCAT:
EIGHT MILE FLAT

4. LOCATION OF WELL
FOOTAGES AT SURFACE:
1978 FNL 1972 FEL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:
Qtr/Qtr: SWNE Section: 17 Township: 10.0S Range: 17.0E Meridian: S

COUNTY:
DUCHESNE

STATE:
UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 11/25/2011	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: 11/23/2010

By: 

NAME (PLEASE PRINT) Roger Knight	PHONE NUMBER 303 996-1803	TITLE EHS Supervisor
SIGNATURE N/A	DATE 11/19/2010	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013501800000

API: 43013501800000

Well Name: WILKIN RIDGE FED 32-17-10-17

Location: 1978 FNL 1972 FEL QTR SWNE SEC 17 TWP 100S RNG 170E MER S

Company Permit Issued to: GASCO PRODUCTION COMPANY

Date Original Permit Issued: 11/25/2009

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
- Has the approved source of water for drilling changed? Yes No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
- Is bonding still in place, which covers this proposed well? Yes No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Roger Knight

Date: 11/19/2010

Title: EHS Supervisor **Representing:** GASCO PRODUCTION COMPANY

Date: 11/23/2010

By: 

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS, AND MINING

FORM 9

5. LEASE DESIGNATION AND SERIAL NUMBER:
UTU-75082

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

6. IF INDIAN, ALLOTTEE OR TRIBE NAME:

7. UNIT or CA AGREEMENT NAME:
WILKIN RIDGE DEEP

1. TYPE OF WELL
Gas Well

8. WELL NAME and NUMBER:
WILKIN RIDGE FED 32-17-10-17

2. NAME OF OPERATOR:
GASCO PRODUCTION COMPANY

9. API NUMBER:
43013501800000

3. ADDRESS OF OPERATOR:
8 Inverness Dr. East, Suite 100 , Englewood, CO, 80112

PHONE NUMBER:
303 483-0044 Ext

9. FIELD and POOL or WILDCAT:
EIGHT MILE FLAT

4. LOCATION OF WELL FOOTAGES AT SURFACE:
1978 FNL 1972 FEL
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:
Qtr/Qtr: SWNE Section: 17 Township: 10.0S Range: 17.0E Meridian: S

COUNTY:
DUCHESNE

STATE:
UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 11/25/2012	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: 11/23/2011

By: 

NAME (PLEASE PRINT) Roger Knight	PHONE NUMBER 303 996-1803	TITLE EHS Supervisor
SIGNATURE N/A	DATE 11/22/2011	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013501800000

API: 43013501800000

Well Name: WILKIN RIDGE FED 32-17-10-17

Location: 1978 FNL 1972 FEL QTR SWNE SEC 17 TWP 100S RNG 170E MER S

Company Permit Issued to: GASCO PRODUCTION COMPANY

Date Original Permit Issued: 11/25/2009

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Roger Knight

Date: 11/22/2011

Title: EHS Supervisor **Representing:** GASCO PRODUCTION COMPANY

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.	5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-75082
1. TYPE OF WELL Gas Well	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR:	7. UNIT or CA AGREEMENT NAME: WILKIN RIDGE DEEP
3. ADDRESS OF OPERATOR: _____ PHONE NUMBER: _____ _____ Ext	8. WELL NAME and NUMBER: WILKIN RIDGE FED 32-17-10-17
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1978 FNL 1972 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SWNE Section: 17 Township: 10.0S Range: 17.0E Meridian: S	9. API NUMBER: 43013501800000
	9. FIELD and POOL or WILDCAT: EIGHT MILE FLAT
	COUNTY: DUCHESNE
	STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 11/25/2013	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input style="width: 100px;" type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: November 21, 2012

By: 

NAME (PLEASE PRINT) Roger Knight	PHONE NUMBER 303 996-1803	TITLE EHS Supervisor
SIGNATURE N/A		DATE 11/20/2012



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013501800000

API: 43013501800000

Well Name: WILKIN RIDGE FED 32-17-10-17

Location: 1978 FNL 1972 FEL QTR SWNE SEC 17 TWNP 100S RNG 170E MER S

Company Permit Issued to: GASCO PRODUCTION COMPANY

Date Original Permit Issued: 11/25/2009

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No

- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No

- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No

- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No

- Has the approved source of water for drilling changed? Yes No

- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No

- Is bonding still in place, which covers this proposed well? Yes No

Signature: Roger Knight

Date: 11/20/2012

Title: EHS Supervisor Representing: GASCO PRODUCTION COMPANY



United States Department of the Interior



BUREAU OF LAND MANAGEMENT

Utah State Office

440 West 200 South, Suite 500

Salt Lake City, UT 84101

<http://www.blm.gov/ut/st/en.html>

RECEIVED
FEB 07 2013
DIV. OF OIL, GAS & MINING

FEB 05 2013

IN REPLY REFER TO:
3180 (UTU81153X)
UT-922000

Ms. Frankie L. Martinez
Gasco Energy, Inc.
7979 East Tufts Avenue, Suite 1150
Denver, Colorado 80237

Re: Automatic Contraction
Wilkin Ridge (Deep) Unit
Uintah and Duchesne Counties, Utah

Dear Ms. Martinez:

Your letter of January 24, 2013, describes the lands automatically eliminated effective September 17, 2012, from the Wilkin Ridge (Deep) Unit Area, Uintah and Duchesne Counties, Utah, pursuant to Section 2(e) of the unit agreement and requests our concurrence. The lands you have described contain 44,447.23 acres, more or less, and constitute all legal subdivisions, no parts of which are included in the Wilkin Ridge (Deep) Participating Areas "A" and "B". As a result of the automatic contraction, the unit is reduced to 480.00 acres.

The following Federal Leases are entirely eliminated from the unit area:

UTU56947	UTU75084	UTU77063	UTU88144
UTU68387	UTU75085	UTU78214	UTU88204
UTU68620*	UTU75086	UTU78215	
UTU74400	UTU75087	UTU78216	
UTU74401	UTU75088	UTU80950	
UTU74402	UTU75235	UTU81003*	
UTU74403	UTU75236	UTU81706*	
UTU74407	UTU75514	UTU82704	
UTU74408	UTU75515	UTU82705	
UTU74836	UTU75672	UTU84262	Tract No. 43 UNLEASED*
UTU74968	UTU76031	UTU84263	
UTU74971	UTU76032	UTU84264	
UTU75079	UTU76256	UTU84265	
UTU75080	UTU76258	UTU88068	
UTU75081	UTU76716	UTU88069	
UTU75082	UTU76717	UTU88072	

*Indicates non-committed lease

The following Federal Leases are partially eliminated from the unit area:

UTU65632

UTU75083

You have complied with the requirements of Section 2(e), provided you promptly notify all interested parties. If you have any questions, please contact Judy Nordstrom at (801) 539-4108.

Sincerely,

Handwritten signature of Roger L. Bankert in black ink.

Roger L. Bankert
Chief, Branch of Minerals

Enclosure

cc: UDOGM
SITLA
ONRR w/Exhibit "B" (Attn: Nancy McCarthy)
(UTG01) BLM FOM - Vernal w/enclosure



GARY R. HERBERT
Governor

SPENCER J. COX
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

January 28, 2014

Jessica Berg
Gasco Production Company
7979 E Tufts Ave. Ste. 1150
Denver, CO 80237

Re: APDs Rescinded for Gasco Production Company,
Uintah & Duchesne County

Dear Ms. Berg:

Enclosed find the list of APDs that is being rescinded. On January 25, 2014, you requested that the division rescind the state approved APD. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded, effective January 25, 2014.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal



4304738857 ANTELOPE FED 33-15-10-18
4304736130 FEDERAL 12-21-9-19
4304738856 FEDERAL 14-20-9-19
4304739801 FEDERAL 21-17-9-19
4304738855 FEDERAL 21-20-9-19
4304738854 FEDERAL 23-20-9-19
4304738580 FEDERAL 31-22-10-18
4304738853 FEDERAL 34-17-9-19
4301350178 GATE CANYON FED 24-15-11-16
4301333438 RYE PATCH FED 22-13
4301333439 RYE PATCH FED 22-44
4301333440 RYE PATCH FED 23-11
4301333441 RYE PATCH FED 23-22
4301333442 RYE PATCH FED 23-32
4301333444 RYE PATCH FED 24-31
4301333445 RYE PATCH FED 24-43
4301333446 RYE PATCH FED 24-44
4304738574 SHEEP WASH FED 32-26-9-18
4304739778 UTELAND FED 43-3-10-18
4301350184 WILKIN RIDGE FED 11-17-10-17
4301333314 WILKIN RIDGE FED 12-33-10-17
4301332756 WILKIN RIDGE FED 14-15-10-17
4301333738 WILKIN RIDGE FED 14-29-10-17
4301333857 WILKIN RIDGE FED 22-31-10-17

4301333886 WILKIN RIDGE FED 24-30-10-17
4301333856 WILKIN RIDGE FED 24-31-10-17
4301333905 WILKIN RIDGE FED 31-19-10-17
4301333855 WILKIN RIDGE FED 31-30-10-17
4301350180 WILKIN RIDGE FED 32-17-10-17
4304739802 WILKIN RIDGE FED 32-21-10-18
4301333739 WILKIN RIDGE FED 34-29-10-17
4301333474 WILKIN RIDGE FED 41-21-10-17
4301334165 WILKIN RIDGE FED 41-27-10-17
4301334245 WILKIN RIDGE FED 41-28-10-17
4301333330 WILKIN RIDGE FED 41-31-10-17
4301334208 WILKIN RIDGE FED 42-7-11-17
4301333870 WILKIN RIDGE FED 43-21-10-17
4301333323 WILKIN RIDGE FED 43-30-10-17
4301333329 WILKIN RIDGE FED 43-31-10-17



Diana Mason <dianawhitney@utah.gov>

RE: Expired APDs

Jessica Berg <jberg@gascoenergy.com>
To: Diana Mason <dianawhitney@utah.gov>

Sat, Jan 25, 2014 at 3:11 PM

Hi Diana,

Thanks for the fyi! I'll get any outstanding renewals in ASAP.

I've had a chance to go through the State APD list, Gasco is no longer pursuing the following locations, please go ahead and rescind the list below.

Hopefully this helps clean things up a bit!

Thanks,

Jessica

4304738857 ANTELOPE FED 33-15-10-18

4304736130 FEDERAL 12-21-9-19

4304738856 FEDERAL 14-20-9-19

4304739801 FEDERAL 21-17-9-19

4304738855 FEDERAL 21-20-9-19

4304738854 FEDERAL 23-20-9-19

4304738580 FEDERAL 31-22-10-18

4304738853 FEDERAL 34-17-9-19

4301350178 GATE CANYON FED 24-15-11-16

4301333438 RYE PATCH FED 22-13

4301333439 RYE PATCH FED 22-44

4301333440 RYE PATCH FED 23-11

4301333441 RYE PATCH FED 23-22

4301333442 RYE PATCH FED 23-32

4301333444 RYE PATCH FED 24-31

4301333445 RYE PATCH FED 24-43
4301333446 RYE PATCH FED 24-44
4304738574 SHEEP WASH FED 32-26-9-18
4304739778 UTELAND FED 43-3-10-18
x 4301350184 WILKIN RIDGE FED 11-17-10-17
4301333314 WILKIN RIDGE FED 12-33-10-17
4301332756 WILKIN RIDGE FED 14-15-10-17
4301333738 WILKIN RIDGE FED 14-29-10-17
4301333857 WILKIN RIDGE FED 22-31-10-17
4301333886 WILKIN RIDGE FED 24-30-10-17
4301333856 WILKIN RIDGE FED 24-31-10-17
4301333905 WILKIN RIDGE FED 31-19-10-17
4301333855 WILKIN RIDGE FED 31-30-10-17
x 4301350180 WILKIN RIDGE FED 32-17-10-17
4304739802 WILKIN RIDGE FED 32-21-10-18
4301333739 WILKIN RIDGE FED 34-29-10-17
4301333474 WILKIN RIDGE FED 41-21-10-17
4301334165 WILKIN RIDGE FED 41-27-10-17
4301334245 WILKIN RIDGE FED 41-28-10-17
4301333330 WILKIN RIDGE FED 41-31-10-17
4301334208 WILKIN RIDGE FED 42-7-11-17
4301333870 WILKIN RIDGE FED 43-21-10-17
4301333323 WILKIN RIDGE FED 43-30-10-17
4301333329 WILKIN RIDGE FED 43-31-10-17