

# ENRON

OIL & GAS COMPANY

P.O. BOX 1815, VERNAL, UTAH 84078 (801)789-0790

September 17, 1991

Bureau of Land Management  
Vernal District  
170 South 500 East  
Vernal, Utah 84078

RE: NOTICE OF STAKING  
NATURAL BUTTES UNIT 332-8E  
Sec. 8, T10S, R21E  
Uintah County, Utah  
Lease No. U-01791

43-047-30148


Dear Mr. Forsman:

Attached is a Notice of Staking on the subject well.

If you require further information, please contact this office.

Very truly yours,  
ENRON OIL & GAS COMPANY

Jay Orr  
Sr. Pumper



Attachment

cc: Division of Oil Gas & Mining  
Doug Weaver/Rod Mellot  
Darrell Zlomke  
File

/lw  
NOSLTR

RECEIVED

SEP 19 1991

DIVISION OF  
OIL GAS & MINING

UNIT OF STATE OF UTAH  
DIVISION OF OIL GAS & MINING  
LEASE AGREEMENT FORM 9-2011-C

Oil Well  Gas Well  Other

Name of Operator  
Enron Oil & Gas Company

Address of Operator or Agent  
P.O. Box 1815, Vernal, Utah 84078

Surface Location of Well  
(Governmental 1/4 or 1/4 1/4)  
955' FSL, 2508' FEL SE/SW  
Attach Topographical or other acceptable map  
showing location, access road, and lease boundaries

4. Formation Objectives  
Wasatch

15. Estimated Well Depth  
6500'

5. Lease Number  
U-01791

6. Indian Ancestor or Tribe Name  
NA

7. Unit Agreement Name  
Natural Buttes Unit

8. Farm or Lease Name  
Natural Buttes Unit

9. Well No.  
332-8E

10. Field or Wildcat Name  
NBU/Wasatch

11. Sec., T., R., M., or  
Bn. and Survey of Area  
Sec. 8, T10S, R21E

12. County or Parish  
Uintah

13. State  
Utah

6. To Be Completed by Operator Prior to Onsite  
a. Location must staked - Completed  
b. Access Road Flagged - Completed  
c. Sketch and/or map of location, showing road, pad dimensions, reserve pit, cuts, and fills  
(To be provided at onsite)

7. To Be Considered By Operators Prior to Onsite  
a. H<sub>2</sub>S Potential - NA  
b. Private Surface Ownership NA  
c. Cultural Resources (Archaeology) 9/17/91  
d. Federal Right of Way


8. Additional Information

9. Signed Linda L. Wall Title Sr. Admin. Clerk Date 9/17/91

RECEIVED

SEP 19 1991

DIVISION OF  
OIL GAS & MINING

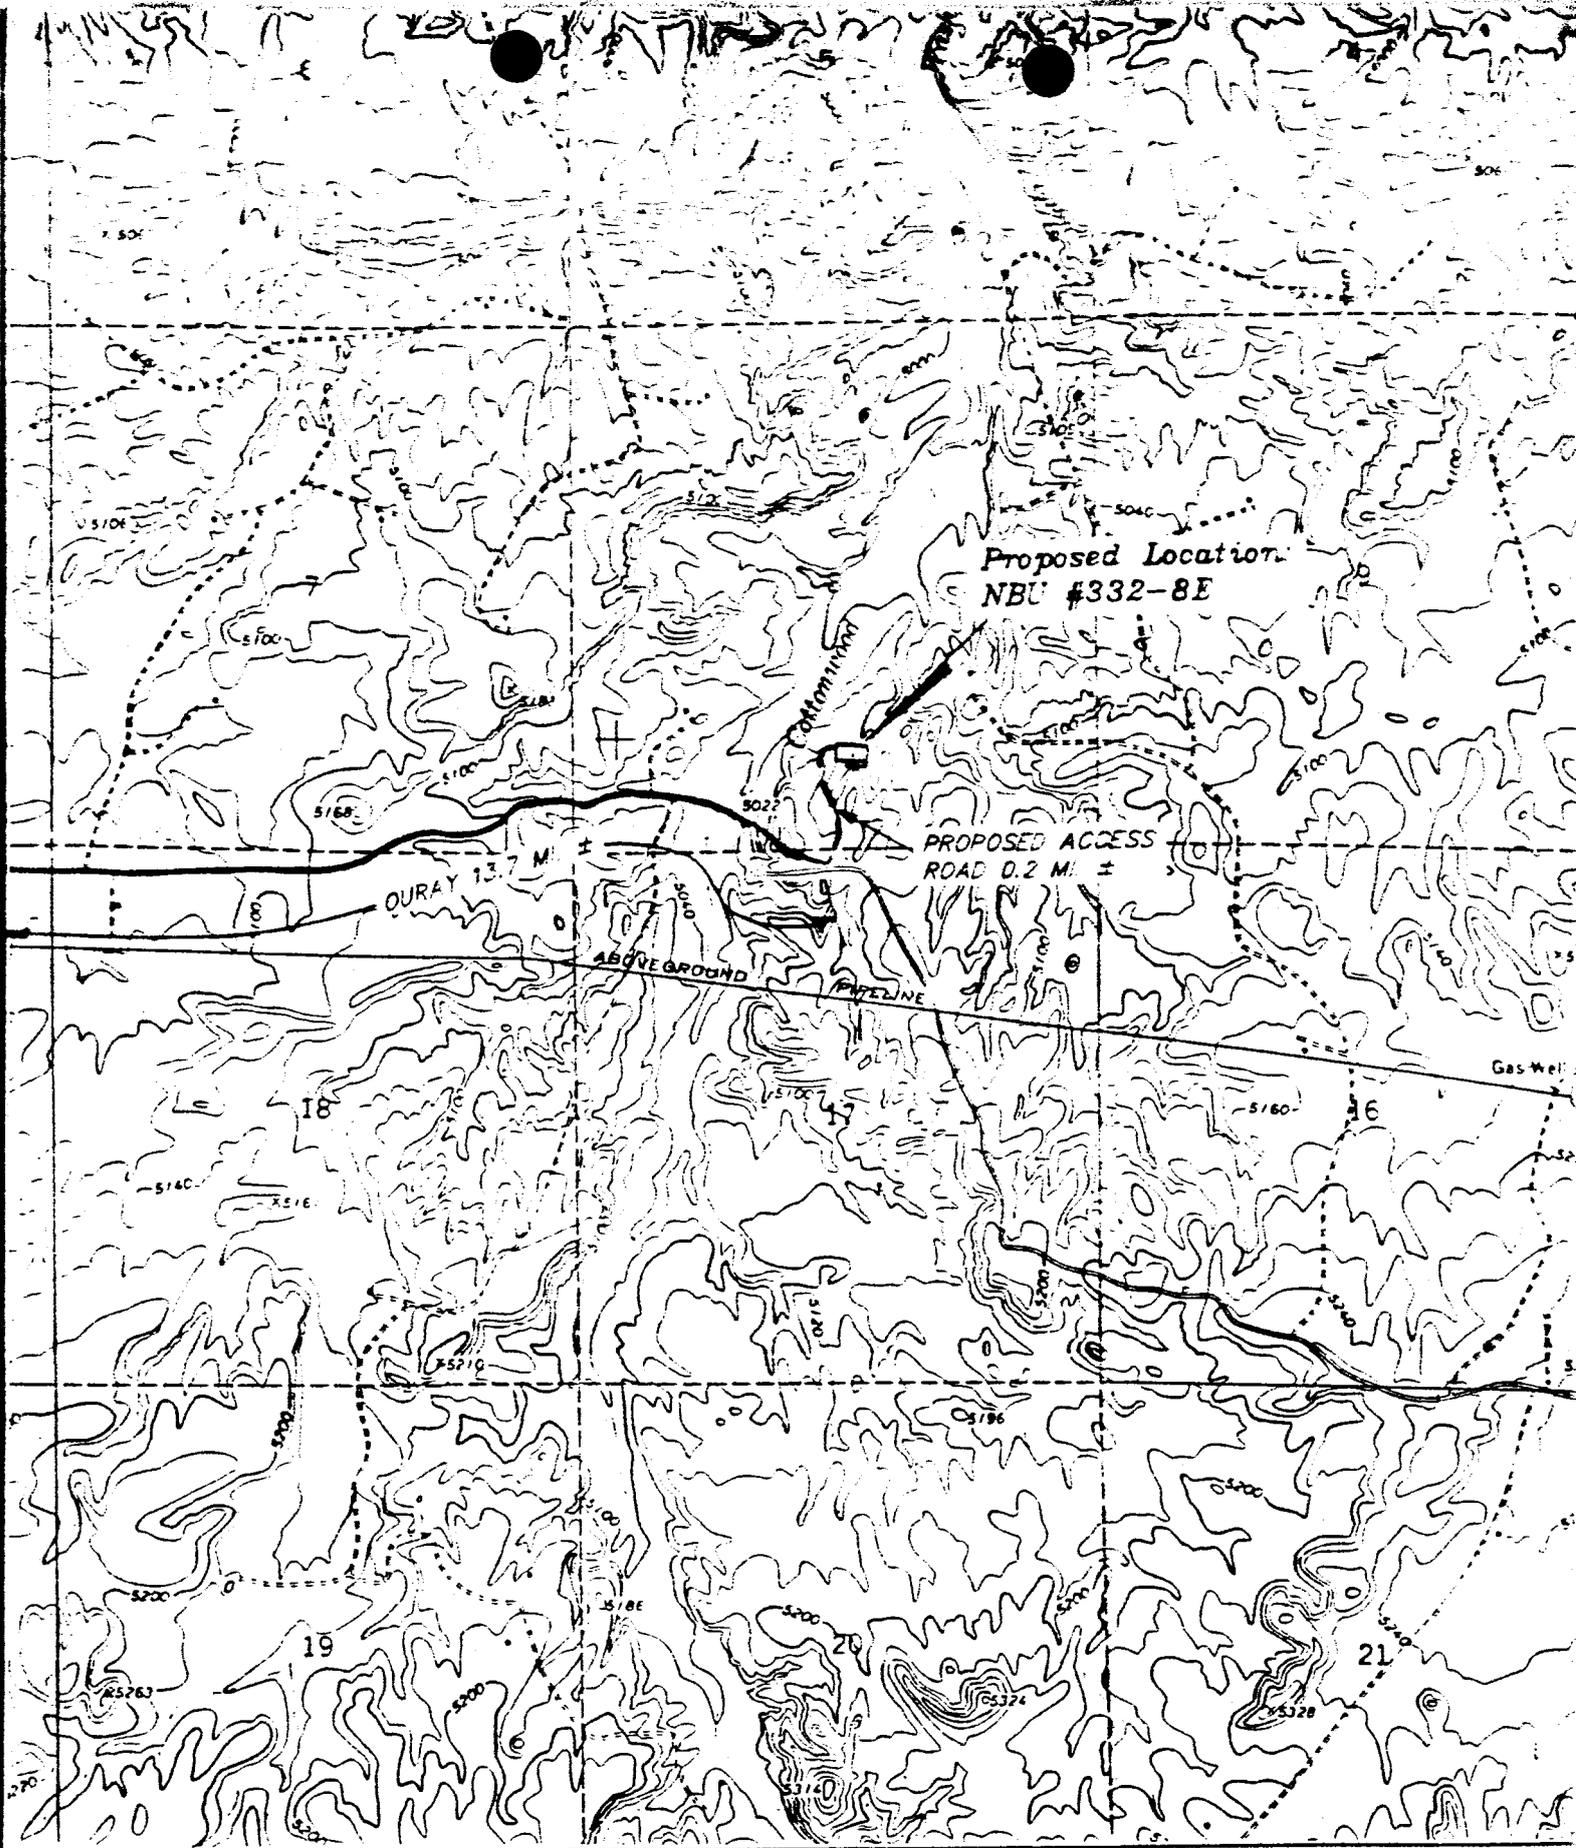

TOPOGRAPHIC  
MAP "B"

SCALE: 1" = 2000'  
DATE 9-16-91 MDA



**ENRON OIL & GAS CO.**

NBU #332-8E  
SECTION 8, T10S, R21E, S.L.B.&M.

# ENRON

## OIL & GAS COMPANY

P.O. BOX 1815, VERNAL, UTAH 84078 (801)789-0790

September 23, 1991

Bureau of Land Management  
Vernal District  
170 South 500 East  
Vernal, Utah 84078

RE: NOTICE OF STAKING  
NATURAL BUTTES UNIT 332-8E  
Sec.8, T10S, R21E  
Uintah County, Utah  
Lease No. U-01791

43-047-30148

Dear Mr. Forsman:

Attached is a corrected copy Notice of Staking on the subject well.

If you require further information, please contact this office.

Very truly yours,  
ENRON OIL & GAS COMPANY

Jay Orr  
Sr. Pumper



Attachment

cc: Division of Oil Gas & Mining  
Doug Weaver/Toni Miller  
Darrell Zlomke  
File

/lw  
NOSLTR

RECEIVED

SEP 25 1991

DIVISION OF  
OIL GAS & MINING

NOTICE OF STAKING (Not to be used in place of Application to Drill Form 9-331-C)		RMOGA 5/5/82	5. Lease Number U-01791
1. Oil Well      Gas Well X      Other			6. If Indian, Allottee or Tribe Name NA
2. Name of Operator Enron Oil & Gas Company			7. Unit Agreement Name Natural Buttes Unit
3. Address of Operator or Agent P. O. Box 1815, Vernal, Utah 84078			8. Farm or Lease Name Natural Buttes Unit
4. Surface Location of Well (Governmental 1/4 or 1/4 1/4)  955' FSL & 2508' FEL SW/SE			9. Well No. 332-8E
Attach: Topographical or other acceptable map Showing location, access road, and lease boundaries			10. Field or Wildcat Name NBU/Wasatch
14. Formation Objective(s) Wasatch	15. Estimated Well Depth 6500'		11. Sec., T., R., M., or Blk and Survey or Area Sec. 8, T10S, R21E
		12. County or Parish Uintah	13. State Utah

16. To Be Completed by Operator Prior to Onsite

- a. Location must staked - Completed
- b. Access Road Flagged - Completed
- c. Sketch and/or map of location, showing road, pad dimensions, reserve pit, cuts, and fills  
(To be provided at onsite)

17. To Be Considered By Operators Prior to Onsite

- a. H2S Potential - NA
- b. Private Surface Ownership - NA
- c. Cultural Resources (Archaeology) 9/17/91
- d. Federal Right of Way

18. Additional Information

19. Signed *Linda L. Way* Title Sr. Admin. Clerk Date 9/23/91

RECEIVED  
SEP 25 1991  
DIVISION OF  
OIL GAS & MINING

HP LASER

# ENRON

## Oil & Gas Company

1801 California Street, Suite 3400, Denver, Colorado 80202 (303) 293-2525

October 11, 1991

RECEIVED

OCT 16 1991

DIVISION OF  
OIL GAS & MINING

Utah State Office  
Bureau of Land Management  
P.O. Box 45155  
Salt Lake City, Utah 84145-0155

Attention: Mr. Robert A. Henricks  
Chief, Branch of Fluid Minerals

RE: Designations of Agent  
NBU 301-24E  
SW/4SE/4 of Sec. 24-9S-21E  
NBU 304-18E  
SW/4SE/4 of Sec. 18-9S-21E  
NBU 305-7E  
NE/4NW/4 of Sec. 7-9S-21E  
NBU 331-35E  
SE/4NE/4 of Sec. 35-9S-22E  
NBU 332-8E  
SW/4SE/4 of Sec. 8-10S-21E  
Uintah County, Utah  
Natural Buttes Prospect  
1540-AA29, 1540-AA41, 0050612-000,  
0050621-000, 0050625-000, 0050630-000,  
0050691-000

Gentlemen:

Enclosed, for your approval, are three (3) copies of five (5) separate Designations of Agent pertaining to Enron Oil & Gas Company's proposed NBU 301-24E, NBU 304-18E, NBU 305-7E, NBU 331-35E and NBU 332-8E wells. All copies have been originally executed on behalf of Coastal Oil & Gas Corporation.

If anything further is needed in connection with this matter, please contact the undersigned at the telephone number listed in the letterhead.

Yours very truly,

ENRON OIL & GAS COMPANY



Toni Lei Miller  
Project Landman

TLM/dac  
Enclosures  
9267T

cc: Vernal District, BLM (with copies of enclosures)  
Division of Oil, Gas & Mining, Attn: Ms. Tami Seering  
(with copies of enclosures)  
Jim Schaefer - Big Piney (with copies of enclosures)  
George R. McBride - Vernal (with copies of enclosures)  
Coastal Oil & Gas Corporation, Attn: Mr. Donald H. Spicer  
(without copies of enclosures)



# ENRON

OIL & GAS COMPANY

P.O. BOX 1833, VERNAL, UTAH 84078 (801) 789-0781

October 31, 1991

RECEIVED

NOV 07 1991

DIVISION OF  
OIL GAS & MINING

Bureau of Land Management  
Vernal District  
170 South 500 East  
Vernal, Utah 84078

RE: APPLICATION FOR PERMIT TO DRILL  
NATURAL BUTTES UNIT 332-8E  
SECTION 8, T10S, R21E  
UINTAH COUNTY, UTAH  
LEASE NO. U-01791


Dear Mr. Forsman:

Enclosed are the original and two (2) copies of the Application for Permit to Drill and associated attachments for the referenced well.

If further information is required regarding this matter, please contact this office.

Sincerely,

ENRON OIL & GAS COMPANY



George R. McBride  
Sr. Production Foreman

#### Attachments

cc: State Division of Oil, Gas & Mining  
D. Weaver/T. Miller  
D. Zlomke  
Suzanne Saldivar - Houston  
File

/lw  
NSU332-BEAPD

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

LEASE IDENTIFICATION AND SERIAL NO.

U-01791

IF INDICATE ABBREVIATION OF TITLE NAME

Federal

UNIT AGREEMENT NAME

Natural Buttes Unit

FARM OR LEASE NAME

Natural Buttes Unit

WELL NO.

332-8E

FIELD AND POOL OR WILDCAT

NBU/Wasatch 630

SECTION, TOWNSHIP, OR BLM AND SURVEY OF AREA

Sec. 8, T10S, R21E

COUNTY OF PALMER STATE

Uintah Utah

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1. TYPE OF WORK: DRILL  DEEPEN  PLUG BACK

2. TYPE OF WELL: OIL WELL  GAS WELL  OTHER  SINGLE ZONE  MULTIPLE ZONE

3. NAME OF OPERATOR: Enron Oil & Gas Company

4. ADDRESS OF OPERATOR: P.O. Box 1815, Vernal, Utah 84078

5. LOCATION OF WELL (Report location clearly and in accordance with any State requirements):  
At NE1/4 SW/4 SE/4 955' FSL & 2508' FEL  
At proposed prod. zone

6. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE:  
14 Miles Southeast of Ouray, Utah

7. DISTANCE FROM PROPOSED LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to deepest drg. unit line, if any): 955'

8. DISTANCE FROM PROPOSED LOCATION TO NEAREST WELL DRILLING COMPLETE OR APPLIC. FOR ON THIS LEASE FT.: Approx. 1369'

9. ELEVATIONS (Show whether DF, BT, GR etc.): 5050' GR

10. NO. OF ACRES IN LEASE: 2163.6±

11. NO. OF ACRES ASSIGNED TO THIS WELL: 80

12. PROPOSED DEPTH: 6200' WSTC

13. ROTARY OR CABLE TOOLS: Rotary

14. APPROX. DATE WORK WILL START: 11/91

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4"	9 5/8"	32.3#	200'	125 sx Class "G" + 2% CaCl2 + 1/2 #/sx celloflake. 50/50 Pozmix + 2% gel + 10% salt to 400' above all zones of interest (+ 10% excess). Light cement (11 PPG±) + LCM to 100' above oil shale or fresh water intervals (+ 5% excess).
7 7/8"	4 1/2"	10.5#	6200'	

RECEIVED

NOV 07 1991

DIVISION OF OIL GAS & MINING

SEE ATTACHMENTS FOR:

- 8 Point Plan
- Drilling Program
- BOP Schematic
- Surface Use and Operating Plan
- Location Plat
- Location Layout
- Topographic Maps "A", "B", and "C"

Enron Oil & Gas Company will be the designated operator of the subject well under Nation Wide bond #81307603.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

SIGNED: Leola L. Wall TITLE: Sr. Admin. Clerk DATE: 10/31/91

(This space for Federal or State office use)

PERMIT NO. 43-047-30148 APPROVAL DATE: APPROVED BY THE STATE OF UTAH DIVISION OF OIL, GAS, AND MINING

APPROVED BY: \_\_\_\_\_ TITLE: \_\_\_\_\_ DATE: 11-15-91

CONDITIONS OF APPROVAL, IF ANY: \_\_\_\_\_ BY: J. Matthews

WELL SPACING: 615-2-3

\*See Instructions On Reverse Side



**ENRON OIL & GAS CO.**

**T10S, R21E, S.L.B.&M.**

Well Location, NBU #332-8E, Located as Shown in the SW 1/4 SE 1/4 of Section 8, T10S, R21E, S.L.B.&M. Uintah County, Utah.


BASIS OF ELEVATION

SPOT ELEVATION AT THE SE CORNER OF SECTION 8, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN. NE QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5100 FEET.

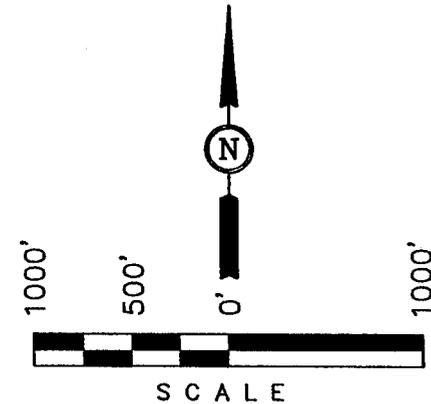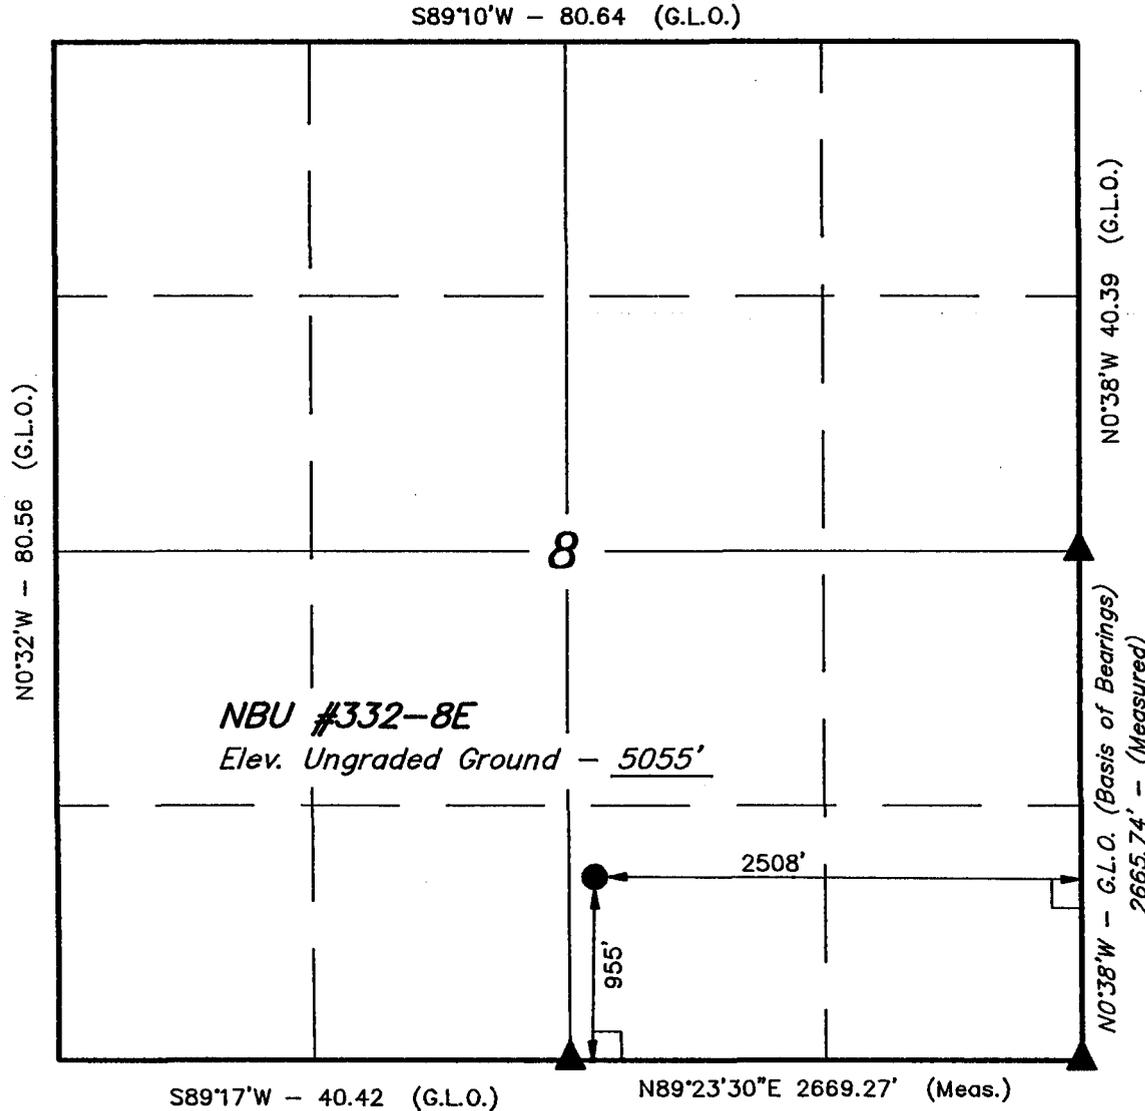

CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



REGISTERED LAND SURVEYOR  
REGISTRATION NO. 5709  
STATE OF UTAH

**UINTAH ENGINEERING & LAND SURVEYING**  
85 SOUTH - 200 EAST  
VERNAL, UTAH - 84078

SCALE 1" = 1000'	DATE 9-16-91
PARTY G.S. C.Y. J.R.S.	REFERENCES G.L.O. PLAT
WEATHER WARM	FILE ENRON OIL & GAS CO.

▲ = SECTION CORNERS LOCATED. (Brass Caps)

EIGHT POINT PLAN

NATURAL BUTTES UNIT 332-8E

SECTION 8, T10S, R21E

UINTAH COUNTY, UTAH

1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS & WATER ZONES:

FORMATIONS	DEPTH	TYPE ZONES	MAXIMUM PRESSURE
Uinta	Surface		
Green River			
Oil Shale	995'		
"H" Marker	2,709'		
"J" Marker	3,387'		
Base "M" Marker	4,019'		
Wasatch			
Peters Point	4,515	Gas	2,300 PSI
Chapita Wells	5,045	Gas	2,500 PSI
Buck Canyon	5,605	Gas	2,800 PSI
EST. TD	6,200'	Anticipated BHP	4,100 PSI

All depths are based on estimated KB elevation 5,067'. Maximum pressure estimates are based on bottom hole pressures measured on offset or near vicinity wells to the subject well.

3. PRESSURE CONTROL EQUIPMENT: BOP Schematic Diagram attached.

4. CASING PROGRAM:

<u>HOLE SIZE</u>	<u>INTERVAL</u>	<u>LENGTH</u>	<u>SIZE</u>	<u>WEIGHT</u>	<u>GRADE</u>	<u>MINIMUM SAFETY FACTOR</u>		
						<u>COLLAPSE</u>	<u>BURST</u>	<u>TENSILE</u>
12 1/4"	0' -200'	200'	9 5/8"	32.3#	H-40	1400 PSI	2270 PSI	254,000#
7 7/8"	0' -6200'	6200'	4 1/2"	10.5#	J-55	4010 PSI	4790 PSI	132,000#

All casing to be used will be new or inspected.

EIGHT POINT PLAN

NATURAL BUTTES UNIT 332-8E

PAGE NO. 2

5. MUD PROGRAM:

<u>INTERVAL</u>	<u>MUD TYPE</u>
0' - 200'	Air
200' - 4000'	Air/Water
4000' - TD	Air/3% KCl water

Severe lost circulation probable from 1000' to 3000'.  
Sufficient mud inventory will be maintained on location during drilling to handle any adverse conditions that may arise. 400 bbls of 10.0 brine water will be stored on location for well control if needed.

6. EVALUATION PROGRAM:

Logs: Dual Laterolog/GR From base of surface casing to TD.  
FDC-CNL/GR/Caliper TD to 100' above "H" Marker.  
0-150 GR, 2.68 FDC, 0-100 Linear 2" DDL.

Cores: None Programmed.  
DST' : None Programmed.

Completion: To be submitted at a later date.

7. ABNORMAL CONDITIONS:

None anticipated.

8. STANDARD REQUIRED EQUIPMENT:

- A. Choke Manifold
- B. Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

Attachment: BOP Schematic Diagram

CONDITIONS OF APPROVAL  
FOR THE SURFACE USE PROGRAM OF THE  
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Enron Oil & Gas Company  
Well Name & Number: Natural Buttes Unit 332-8e  
Lease Number: U-01791A  
Location: 955' FSL & 2508' FEL SW/SE Sec. 8 T. 10S R. 21E  
Surface Ownership: Federal Lands - BLM

NOTIFICATION REQUIREMENTS

- Location Construction - forty-eight (48) hours prior to construction of location and access roads.
- Location Completion - prior to moving on the drilling rig.
- Spud Notice - at least twenty-four (24) hours prior to spudding the well.
- Casing String and Cementing - twenty-four (24) hours prior to running casing and cementing all casing strings.
- BOP and related Equipment Tests - twenty-four (24) hours prior to running casing and tests.
- First Production Notice - within five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

## THIRTEEN POINT SURFACE USE PROGRAM

### 1. EXISTING ROADS

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing road.
- B. The proposed well site is located approximately 14 miles southeast of Ouray, Utah - See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

### 2. PLANNED ACCESS ROAD

- A. The access road will be 0.2 miles in length. See attached TOPO Map "B".
- B. The access road has a 30 foot ROW w/18 foot running surface.
- C. Maximum grade on access road will be 5%.
- D. No turn outs will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No culverts, bridges or major cuts & fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

All travel will be confined to existing access road Right-of-Way. Access roads and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service Publication: Surface Operating Standards For Oil & Gas Exploration and Development, (1989).

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the roadbed as necessary to provide a well constructed safe road.

Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of-Way will not be allowed.

Road drainage crossing shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by run off water shall be prevented by diverting water off at frequent intervals by means of cutouts. upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

No Right-of-Way applications will be required.

As operator Enron Oil & Gas Company shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

3. LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION

- A. Water wells - None.
- B. Abandoned wells - None
- C. Temporarily abandoned wells - None
- D. Disposal wells - None
- E. Drilling wells - None
- F. Producing wells - Fourteen - See attached TOPO Map "C" for location of producing wells.
- G. Shut in wells - None
- H. Injection wells - None

4. LOCATION OF EXISTING/AND OR PROPOSED FACILITIES

A. ON WELL PAD

- 1. Tank batteries - None
- 2. Production facilities will be set on location if well is successfully completed for production. Facilities will consist of well head & valves, separator, dehy, 210 BBl condensate tank, meter house and attaching piping. See attached facility diagram.
- 3. Oil gathering lines - None
- 4. A 3 1/2" gathering line will be buried from dehy to east edge of location.
- 5. Injection lines - None
- 6. Disposal lines - None
- 7. Surface pits - None

B. OFF WELL PAD

- 1. Proposed location of attendant off pad gas flowlines shall be flagged prior to archaeological clearance.
- 2. A 4 1/2" OD steel above ground natural gas pipeline will be laid approximately 1300' from proposed location to a point in the SE/SE 2f Sec. 8, T10S, R21E where it will tie into Questar Pipeline Co.s' existing line. Proposed pipeline crosses BLM administered lands within the Natural Buttes Unit, thus no Right-of-Way grant will be required. See attached Exhibit A showing pipeline route.
- 3. Proposed gas gathering pipeline will be a 4 1/2" OD steel, welded line laid on the surface.
- 4. Protective measures and devices for livestock and wildlife will be taken and or installed where required.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire content of the largest tank within the facility/battery, unless more stringent protective requirements are deemed necessary by the authorized officer.

The production facilities will be placed on the north side of location.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities required will be painted within 6 months of installation. Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded. The required paint colors is Carlsbad Canyon. If at any time the facilities located on public land and authorized by the terms of the lease are no longer included in the lease (due to a contraction in the unit or other lease or unit boundary change), BLM will process a change in authorization to the appropriate rental or other financial obligation as determined by the authorized officer.

**5. LOCATION & TYPE OF WATER SUPPLY**

- A. Water supply will be from Ouray Brine Plant at Ouray, Utah, and/or Target Trucking Inc.'s' water source in the SW/SW Sec. 35, T9S, R22E, Uintah County, Utah (State water right #49-1501).
- B. Water will be hauled by Target Trucking Inc.
- C. No water well will be drilled on lease.

**6. SOURCE OF CONSTRUCTION MATERIAL**

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of location.
- B. All construction material will come from Federal Land.
- C. No mineral materials will be required.

**7. METHODS OF HANDLING WASTE DISPOSAL**

**A. METHODS AND LOCATION**

- 1. Cuttings will be confined in the reserve pit.
- 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
- 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at an approved waste disposal facility.
- 4. Produced waste water will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. During the 90 days period, an application for approval of a permanent disposal method and location, together with the required water analysis, will be submitted for the AO's approval
- 5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on drilling rig to avoid leakage of oil to pit.

- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in reserve pit or be removed and dispose of at an authorized disposal site. Introduction of well bore hydrocarbons to reserve pit will be avoided by flaring them off in flare pit at time of recovery.

Burning will not be allowed. all trash must be contained in a trash cage and hauled away to an approved disposal site at the completion of the drilling activities.

On BLM administered land:

The reserve pit will be constructed so as not to leak, break, or allow discharge.

The reserve pit shall not be lined.

After first production, produced waste water will be confined to a lined pit or storage tank for a period not to exceed ninety (90) days. During the 90 day period, in accordance with NTL-2B, an application for approval of a permanent disposal method and location, along with required water analysis, shall be submitted for the AO's approval. Failure to file an application within the time allowed will be considered an incident of noncompliance.

**8. ANCILLARY FACILITIES**

- A. No airstrips or camps are planned for this well.

**9. WELL SITE LAYOUT**

- A. Refer to attached well site plat for related topography cuts and fills & cross sections.  
B. Refer to attached well site plat for rig layout and soil material stockpile location as approve on On-site.  
C. Refer to attached well site plat for rig orientation parking areas, and access road.

The reserve pit will be located on the south side of location. The flare pit will be located downwind of the prevailing wind direction on the south side of location a minimum of 100 feet from the well head and 30 feet from the reserve pit fence. The stockpiled topsoil will be stored on the north corner. Access to the well pad will be from the west.

- NA Diversion ditch(es) shall be construct on the \_\_\_\_\_ side of the location (above/below) the cut slope, draining to the \_\_\_\_\_
- NA Soil compacted earthen berm(s) shall be placed on the \_\_\_\_\_ side(s) of the location between the \_\_\_\_\_
- NA The drainage(s) shall be diverted around the side(s) of the well pad location.
- NA The reserve pit and/or pad locations shall be constructed long and narrow for topographic reasons \_\_\_\_\_
- NA THE \_\_\_\_\_ corner of the well pad will be rounded off to avoid the \_\_\_\_\_.

## FENCING REQUIREMENTS

All pits will be fenced according to the following minimum standards:

- A. 39 inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total eight of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16'.
- E. All wire shall be stretched by using a stretching device before is be attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is to be regularly travelled. If the well is a producer, the cattleguards (shall/shall not) be permanently mounted on concrete bases. Prior to a new road, crossing any fence located on federal land, or any fence between federal land and private land, the operator will contact the BLM, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

## 10. PLANS FOR RESTORATION OF SURFACE

### A. PRODUCING LOCATION

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion. Before any dirt work takes place, the reserve pit will be completely dry and all cans, barrels, pipe, etc., will be removed.

Contact appropriate surface management agency for required seed mixture.

B. DRY HOLE/ABANDONED LOCATION

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and BLM will attach the appropriate surface rehabilitation conditions of approval.

11. SURFACE OWNERSHIP

Access road: Federal  
Location: Federal

12. OTHER INFORMATION

- A. Enron Oil & Gas Company will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to:

-whether the materials appear eligible for the National Register of historic Places;

The mitigation measures the operator will likely have to undertake before the site can be used.

-a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials may be required. Otherwise, the operator will be responsible for mitigation costs. The AO will provide technical and procedural guideline for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

- B. As operator Enron Oil & Gas Company will control noxious weeds along Right-of-Ways for roads, pipelines, well sites or other applicable facilities. A list of noxious weeds will be obtained from the BLM, or the appropriate County Extension Office. On BLM administered land a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.

- C. Drilling rigs and/or equipment used during drilling operations on this wellsite will not be stacked or stored on Federal Lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

**Additional Surface Stipulations**

NA No construction or drilling activities shall be conducted between \_\_\_\_\_ and \_\_\_\_\_ because of \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

NA No surface occupancy will be allowed within 1,000 feet of any sage grouse strutting ground.

NA No construction or exploration activities are permitted within 1.5 mile radius of sage grouse strutting grounds from April 1 to June 30.

NA There shall be no surface disturbance within 600 feet of live water (includes stock tanks, springs, and guzzlers).

NA No cottonwood trees will be removed or damaged.

NA Pond will be constructed according to BLM specifications approximately \_\_\_\_\_ ft. \_\_\_\_\_ of the location, as flagged on onsite.

**LESSEE'S OR OPERATORS REPRESENTATIVE AND CERTIFICATION**

Enron Oil and Gas Company  
P.O. Box 1815  
Vernal, Utah 84078  
George McBride  
Telephone: (801) 789-0790

Enron Oil and Gas Company  
P.O. Box 250  
Big Piney, Wyoming  
Jim Schaefer  
Telephone: (307) 276-3331

All lease/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. Enron Oil & Gas Company is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities

The BLM Office shall be notified upon site completion prior to moving on the drilling rig.

**Certification:**

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in the Plan are to the best of my knowledge, true and correct; and that the work associated with the operations proposed here in will be performed by ENRON OIL & GAS COMPANY and its contractors and sub-contractors in conformity with this Plan and the terms and conditions under which it is approved.

10/31/91  
DATE


  
\_\_\_\_\_  
GEORGE R. MCBRIDE  
SR. PRODUCTION FOREMAN

BOP DIAGRAM

ANNULAR PREVENTOR AND BOTH RAMS ARE 900 SERIES.  
 CASING FLANGE IS 10" 900 SERIES.  
 BOPE 9" 3000#

TESTING PROCEDURE:

1. BOPE's will be tested with a professional tester to conform to Onshore Order #2 with retent every 14 days.
2. Blind & Pipe rams will be tested to rated working pressure, 3000 psig.
3. Annular preventor will be tested to 50% of working pressure, 1500 psig. Will test every 30 days.
4. Casing will be tested to 0.22 psi/ft or 1500 psig. Not to exceed 70% of burst strength, whichever is greater. In this case *1500* psig.
5. They will be tested every 14 days.
6. There are two hydraulic controls, one remote on the rig floor and the other at the accumulator.
7. All lines subject to well pressure will be pressure tested to the same pressure as blind & pipe rams.
8. Hydraulic accumulator system should be 80 gals.
9. All BOPE specifications and configurations will meet Onshore Order #2 requirements for 3000 psig BOPE specifications.

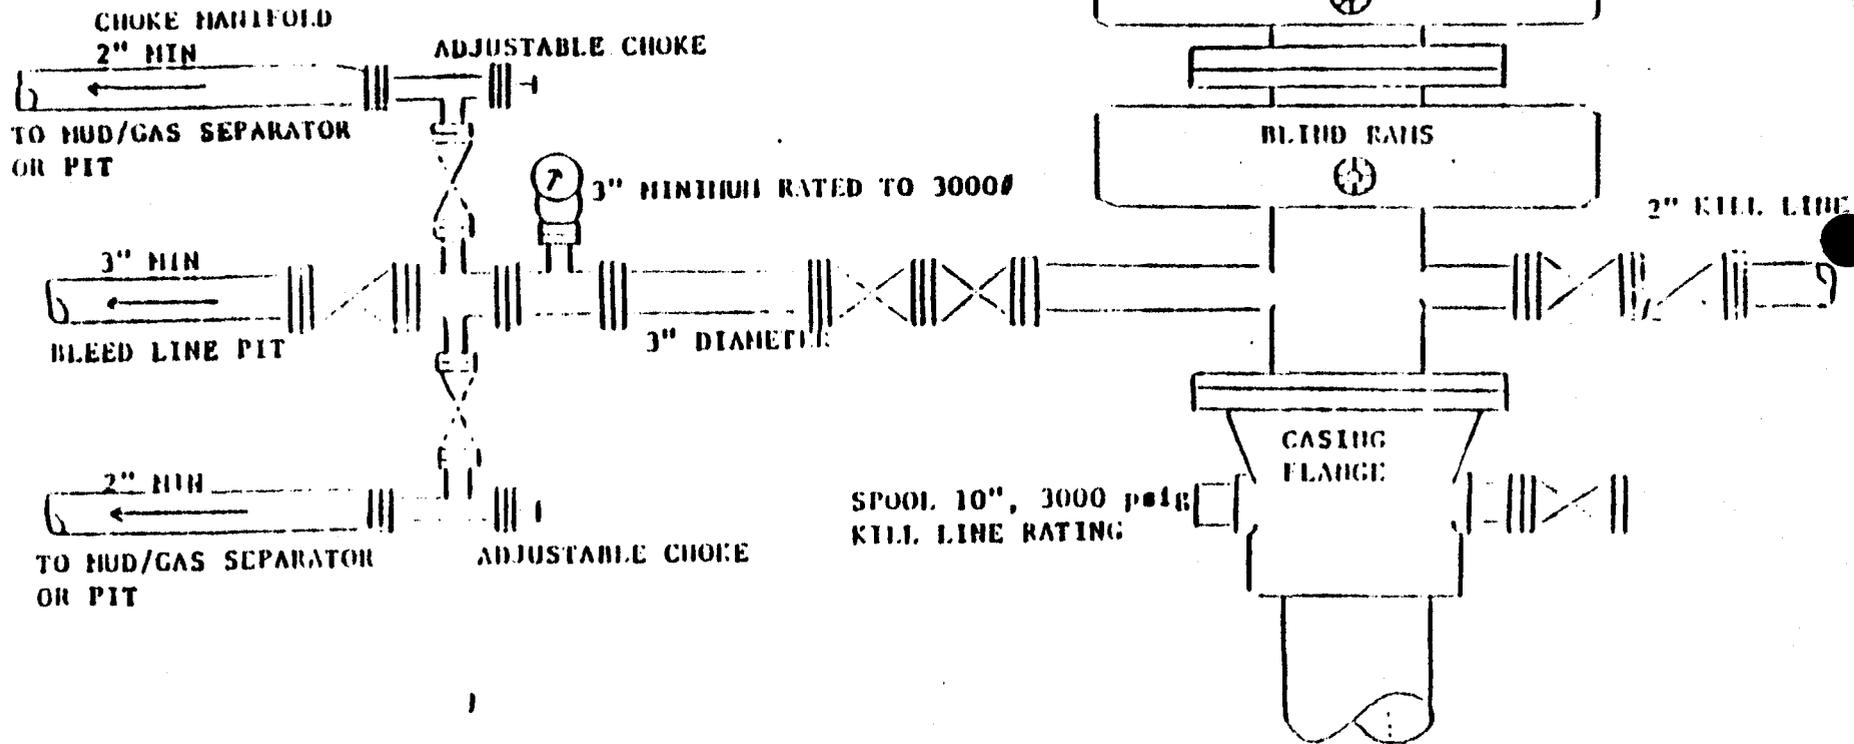

**ENRON**  
Oil & Gas Company  
**DRILLING PROGRAM**

Date: September 12, 1991

REVISION NO. & DATE: \_\_\_\_\_

PROSPECT: NATURAL BUTTES UNIT LEASE: \_\_\_\_\_

WELL NUMBER: Natural Buttes Unit 332-8E

WELL CLASSIFICATION: DW-GAS ANTICIPATED PRODUCTION: OIL \_\_\_\_\_ GAS X OTHER \_\_\_\_\_

LOCATION CALL: 700' FSL & 2000' FEL (SW SE) estimated  
Section 8, T10S, R21E  
Uintah County, Utah

ELEVATION: \_\_\_\_\_

DIRECTION LIMITATIONS: Maximum deviation for the hole will be 6° w/no more than a 1°/100' dogleg severity. See page number 4 for distance between surveys.

TYPE RIG: Land Rotary APPROVED DEPTH: 6200' PERMIT DEPTH: 6200'

CONDUCTOR NEEDED? No If yes, size & how set: \_\_\_\_\_

HOLE SIZE	CASING SIZE	DEPTH	CEMENT PROGRAM
12½"	9½"	200'	Cement w/125 sx Class "G" cement + 2% CaCl <sub>2</sub> + ¼#/sx celloflake. Circulate water ahead of slurry.
7¾"	4½"	6200'	Cover interval from TD to 400'± above zones of interest w/50/50 Pozmix + 2% gel + 10% salt. Volume to be calculated from caliper log annular volume plus 10% excess.  Cover interval to depth specified in conditions of approval with light cement plus specified additives. Volume to be calculated from caliper log annular volume to applicable upper depth plus 5% excess.  Circulate casing 2 hrs before cementing. Reciprocate casing during cementing. Pump 20 bbls fresh water ahead of slurry.

CRITERIA FOR DETERMINING CASING SEAT FOR CRITICAL STRINGS: WOC overnight before cutting off surface casing to weld on head.

WELL NAME: NATURAL BUTTES UNIT 332-8E

## CENTRALIZERS (DEPTH &amp; TYPE):

Surface - One 5-10' above shoe & top of first, second & fourth joint.Production - One @ middle of 1st jt, every third collar to Peter's Point top & every other collar across other zones of interest.

## STAGE COLLARS, BASKETS, OTHER SPECIAL EQUIPMENT:

Surface - Guide shoe & top wooden plug.Production - Guide shoe and differential fill float collar with top plug.

Marker joints @ 3000'± and 5000'±.

PUMPING RATES/SPECIAL INSTRUCTIONS: Circulate casing two hours prior to cementing. Reciprocate casing.LOGGING PROGRAM: DLL/GR from TD to base of surface casing.

FDC/CNL/GR/caliper from TD to 100' above "H" Marker.

Continue caliper to desired top of cement.

CORES: None are anticipated.SAMPLES: Collect 30' samples from below surface casing to 4100'±. Collect 10' samples from 4100'± to TD.FORMATION TESTS: None are anticipated.MUD LOGGING: (Includes services & depth): From 4100'± to TD.DETECTION & CONTROL EQUIPMENT: 10" 900 Series (3000 psig) BOP with blind and pipe rams. 10" 900 Series Annular Preventor. 10" rotating head. Test manifold and BOP's to 3000 psig, annular preventor to 1500 psig, surface casing to 1500 psig. Use certified pressure testing service company and leave a copy of the test chart in the doghouse until rig down.

DRILLING PROGRAM

WELL NAME: NATURAL BUTTES UNIT 332-8E

COMPLETION PROGRAM: To be submitted at a later date.

OTHER SERVICES: None are anticipated.

FORMATION TOPS & DEPTHS (tentative)

FORMATION NAME & TYPE    ESTIMATED DEPTH (EL)    DATUM    THICKNESS & REMARKS

See attached Prognosis.

X-MAS TREE:    10" 3000# weld on casing head, 6" 3000# x 10" 3000# tubing  
spool, 2-1/16" 3000# master valves.

MUD PROGRAM

DEPTH INTERVAL	MUD WEIGHT	VIS	Cl	OIL	WATER LOSS (cc)	TYPE OF MUD
0' to 200'						Air
200' to 4000'						Air/Water
4000' to TD						Air/3% KCl water

NOTE #1: Severe lost circulation probable from 1000' to 3000'.

NOTE #2: Maintain 400 bbls of 10.0 ppg brine water on location for well control.

WELL NAME: NATURAL BUTTES UNIT 332-81

DRILLING HAZARDS & SPECIAL INSTRUCTIONS: Lost circulation from 1000' to 3000'±. Underbalanced circulation system will require rotating head. Potential gas kicks in Green River and Wasatch. Potential shale swelling/sloughing problems. Utilize packoff head while running open hole logs. Use 10 ppg brine water for well control on trips, if necessary.

**CASING & TUBING PROGRAM**

SIZE	INTERVAL		LENGTH	WEIGHT			MINIMUM SAFETY FACTOR		
	FROM	TO		#/FT.	GRADE	THREAD	COLLAPSE (psig)	BURST (psig)	TENSILE (psig)
9-5/8"	0'	200'	200'	32.3#	H-40	ST&C	1400	2270	254,000
4-1/2"	0'	6200'	6200'	10.5#	J-55	LT&C	4010	4790	132,000

**SURVEY SCHEDULE**


DEPTH	DISTANCE BETWEEN SURVEYS	MAXIMUM DEVIATIONS FROM VERTICAL	MAXIMUM CHANGE DEGREES/100'
0' to 200'	200'	1 degree	1 degree
200' to TD	500' (or as needed)	6 degrees	1 degree

PREPARED BY: *Jim R. Schaefer Sr.*  
 Jim R. Schaefer Sr. Production Engineer

APPROVED BY: *Dennis J. Brabec*  
 Dennis J. Brabec, Drilling Superintendent

APPROVED BY: *Darrell E. Zimke*  
 Darrell E. Zimke, District Manager

NATURAL BUTTES 332-8E  
 SECTION 8, T10S, R21E  
 UINTAH COUNTY, UTAH  
 FEDERAL LEASE # U-01791

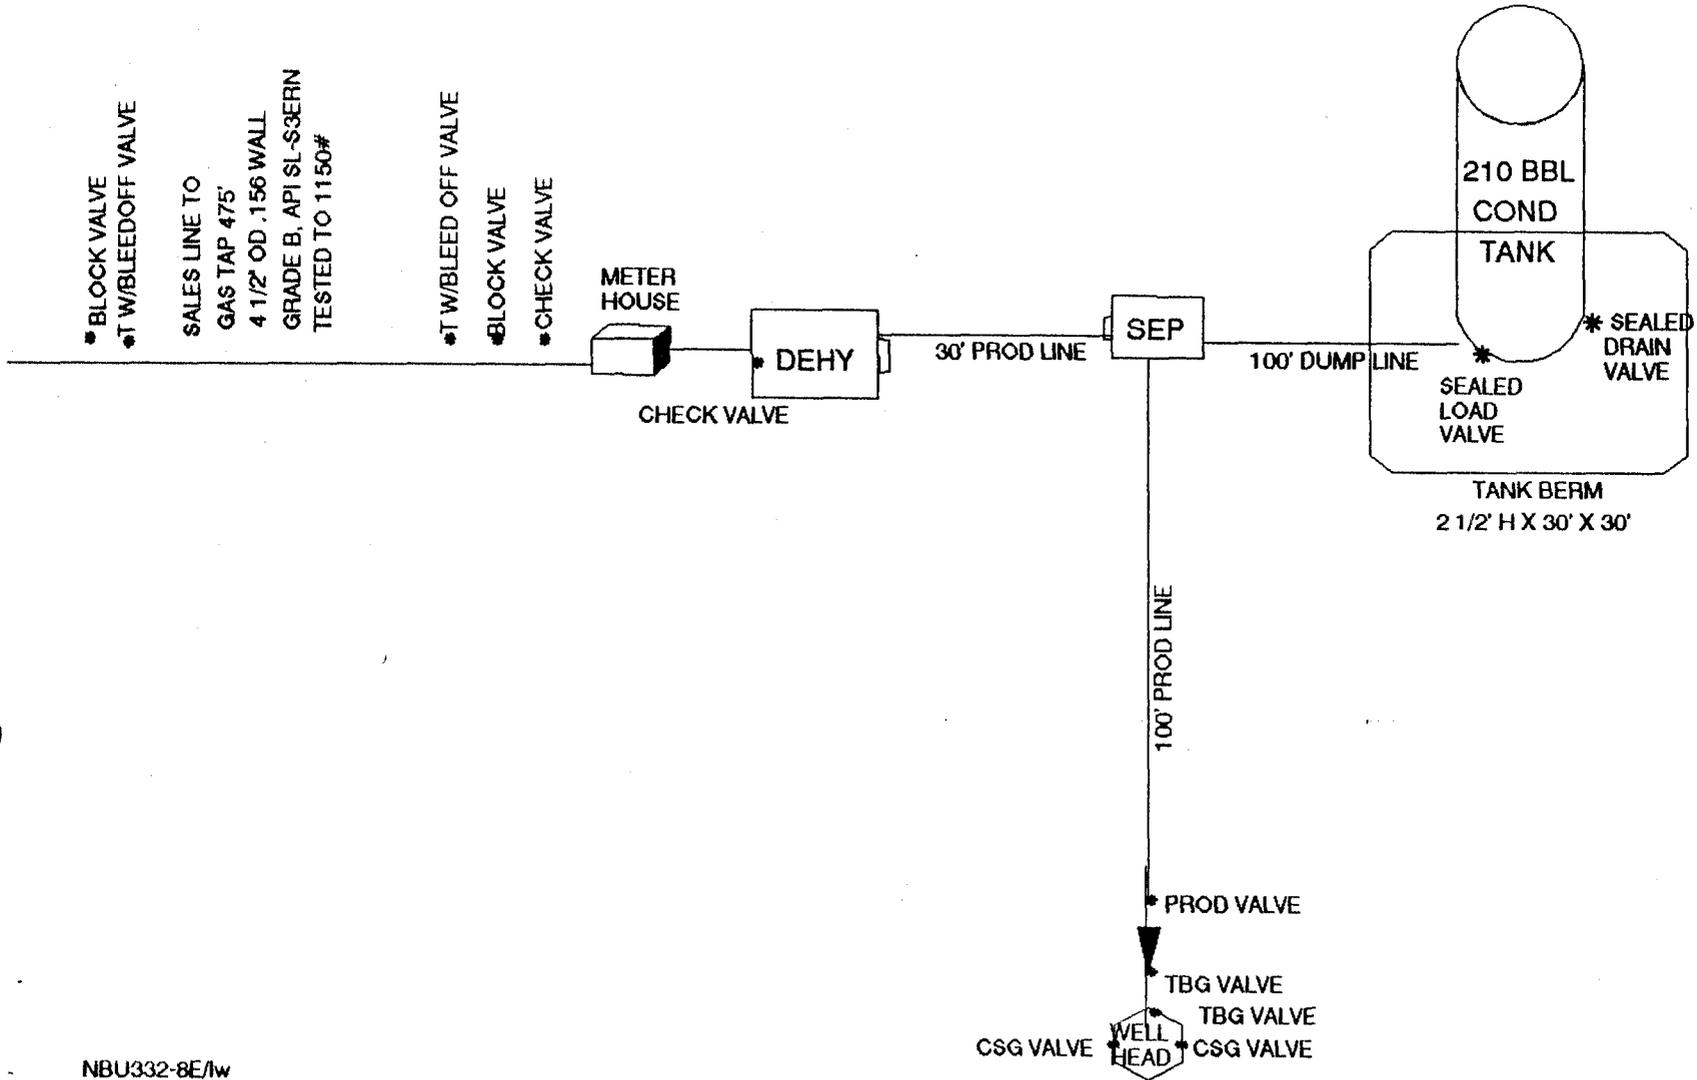

**RECEIVED**

ENRON OIL & GAS CO.


LOCATION LAYOUT FOR

NOV 07 1991





NBU #332-8E

SECTION 8, T10S, R21E, S.L.B.&M.

DIVISION OF  
OIL GAS & MINING



SCALE: 1" = 50'  
DATE: 9-16-91  
Drawn By: J.R.S.

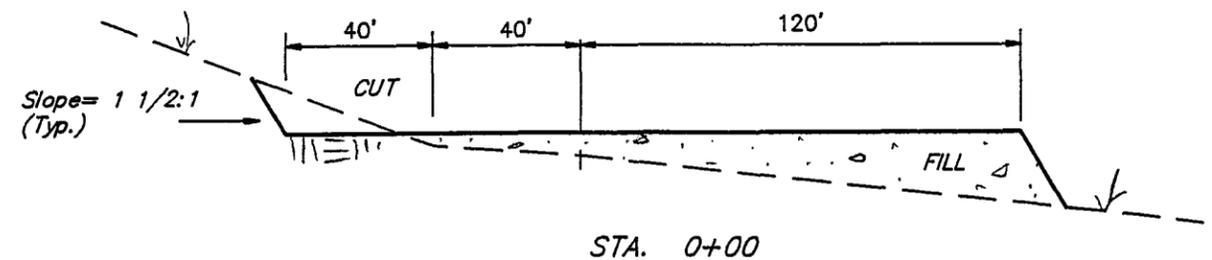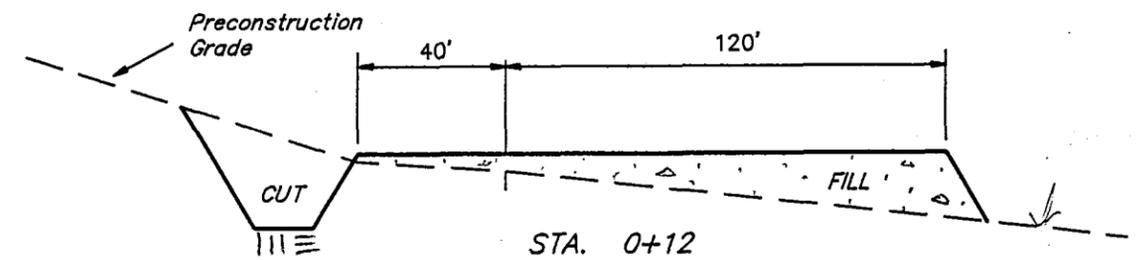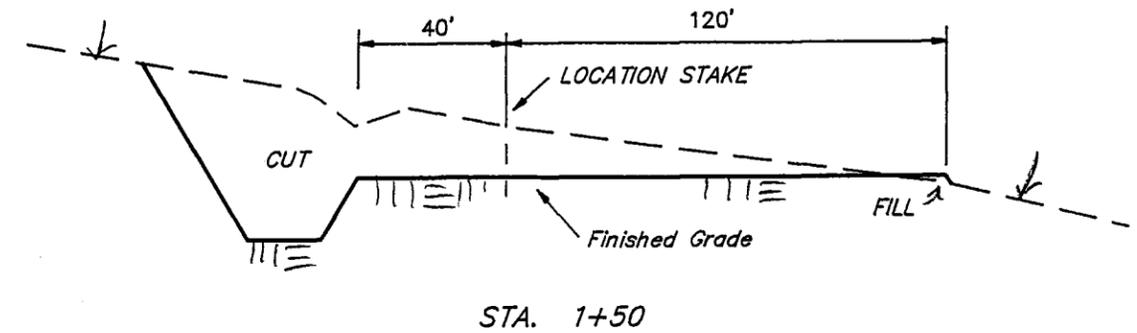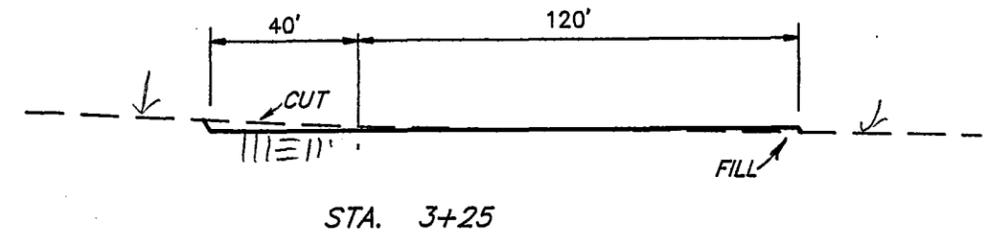


TYP. LOCATION LAYOUT  
TYP. CROSS SECTIONS

Elev. Ungraded Ground at Location Stake = 5055.3'


Elev. Graded Ground at Location Stake = 5049.8'

UINTAH ENGINEERING & LAND SURVEYING  
85 So. 200 East Vernal, Utah

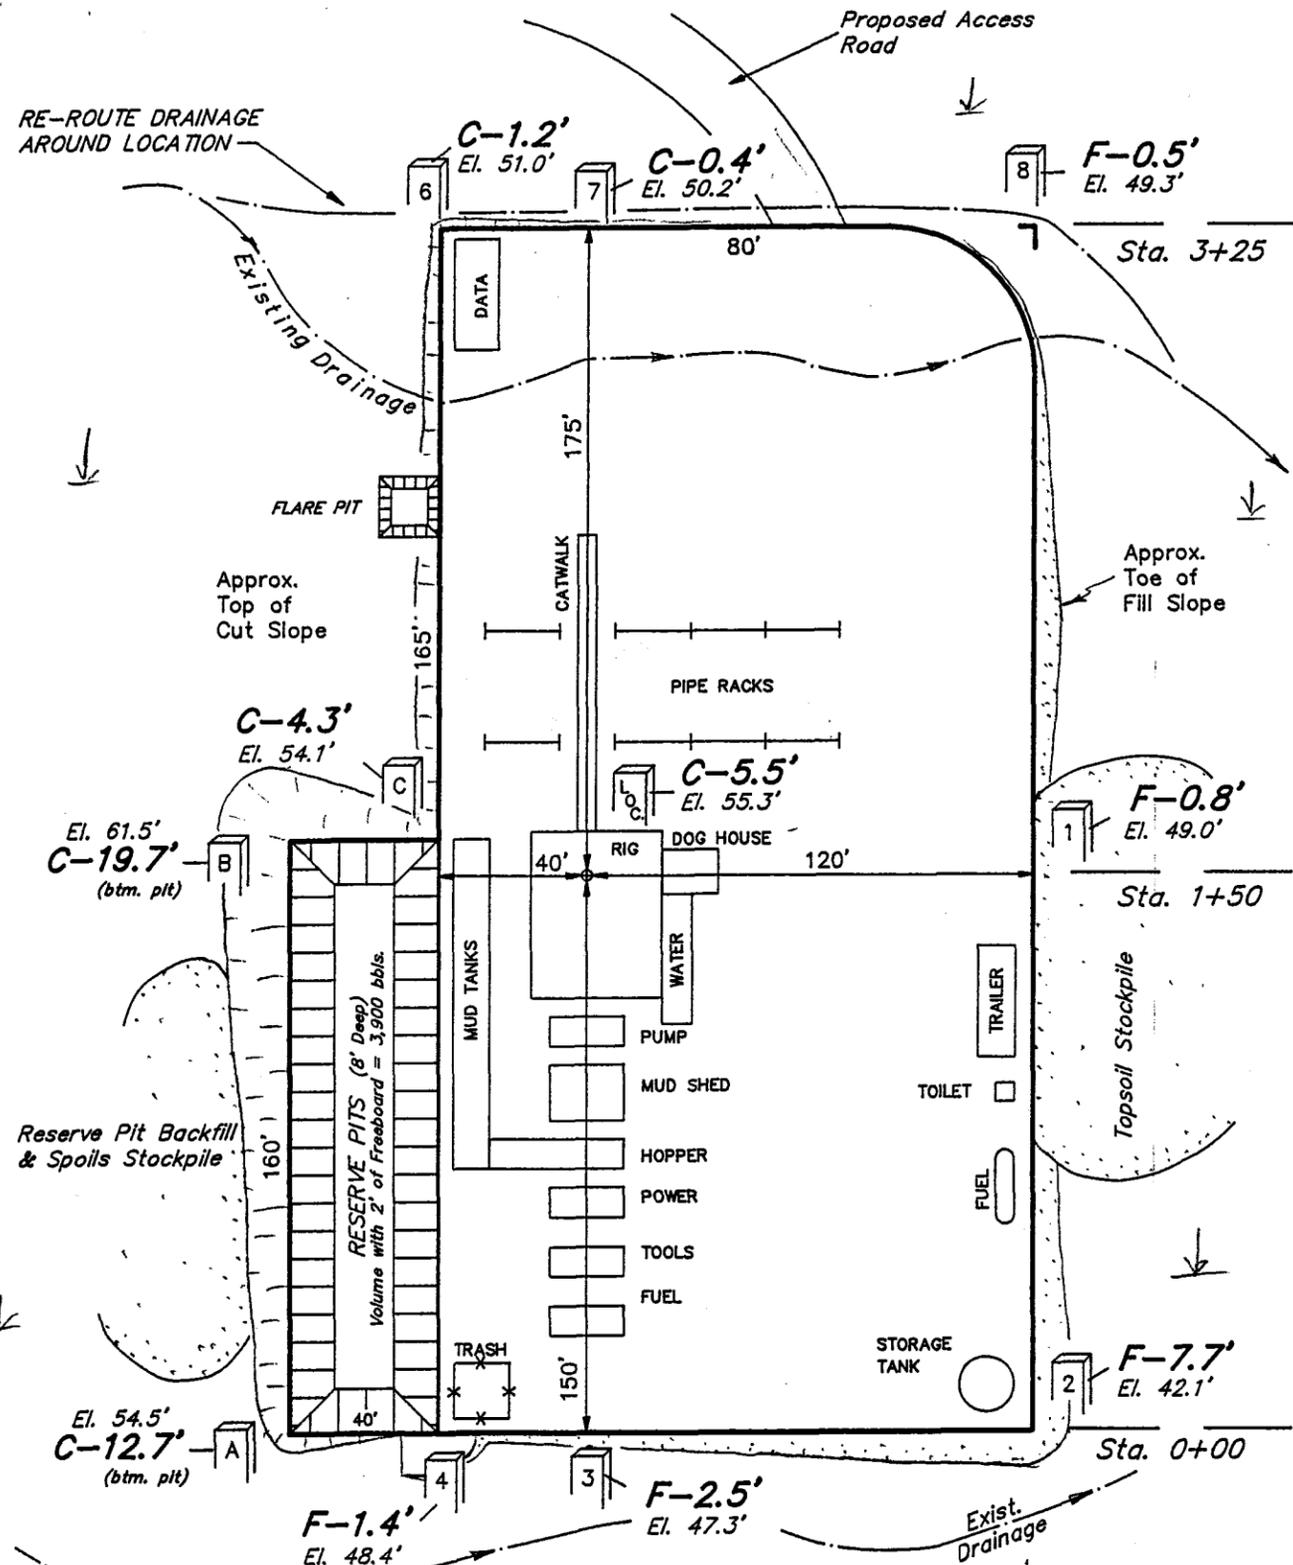

APPROXIMATE YARDAGES

(6") Topsoil Stripping	= 1,100 Cu. Yds.	EXCESS MATERIAL AFTER 5% COMPACTION	= 1,720 Cu. Yds.
Remaining Location	= 4,790 Cu. Yds.	Topsoil & Pit Backfill (1/2 Pit Vol.)	= 1,720 Cu. Yds.
<b>TOTAL CUT</b>	<b>= 5,890 CU.YDS.</b>	EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.
<b>FILL</b>	<b>= 3,960 CU.YDS.</b>		

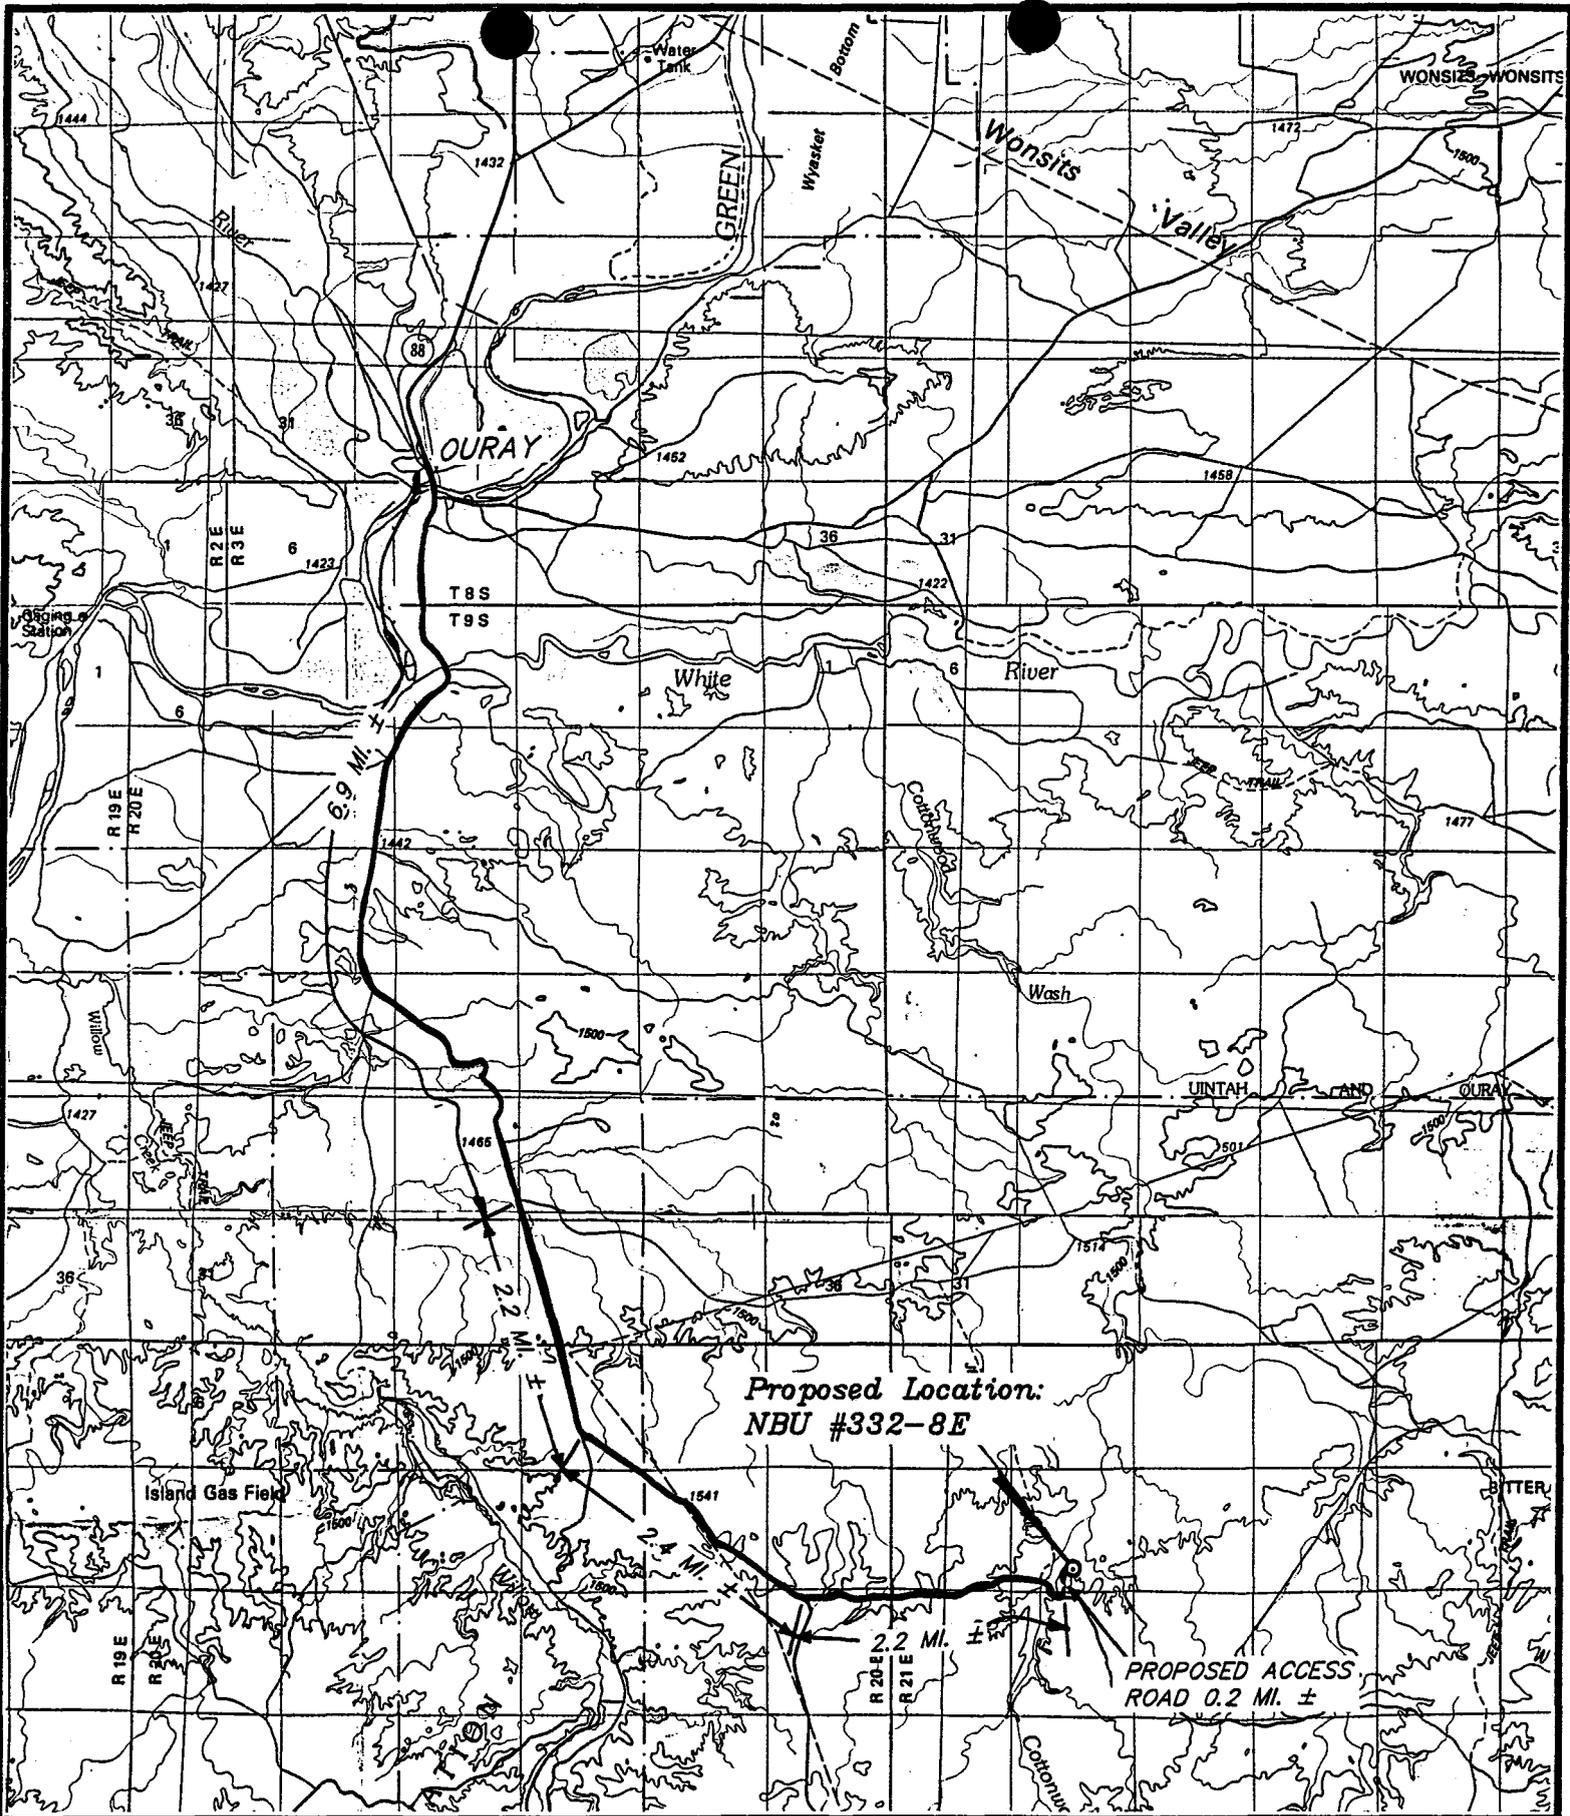

**Proposed Location:  
NBU #332-8E**

**PROPOSED ACCESS  
ROAD 0.2 Mi. ±**


**TOPOGRAPHIC  
MAP "A"**

DATE 9-16-91 MDA



**ENRON OIL & GAS CO.**

NBU #332-8E  
SECTION 8, T10S, R21E, S.L.B.&M.

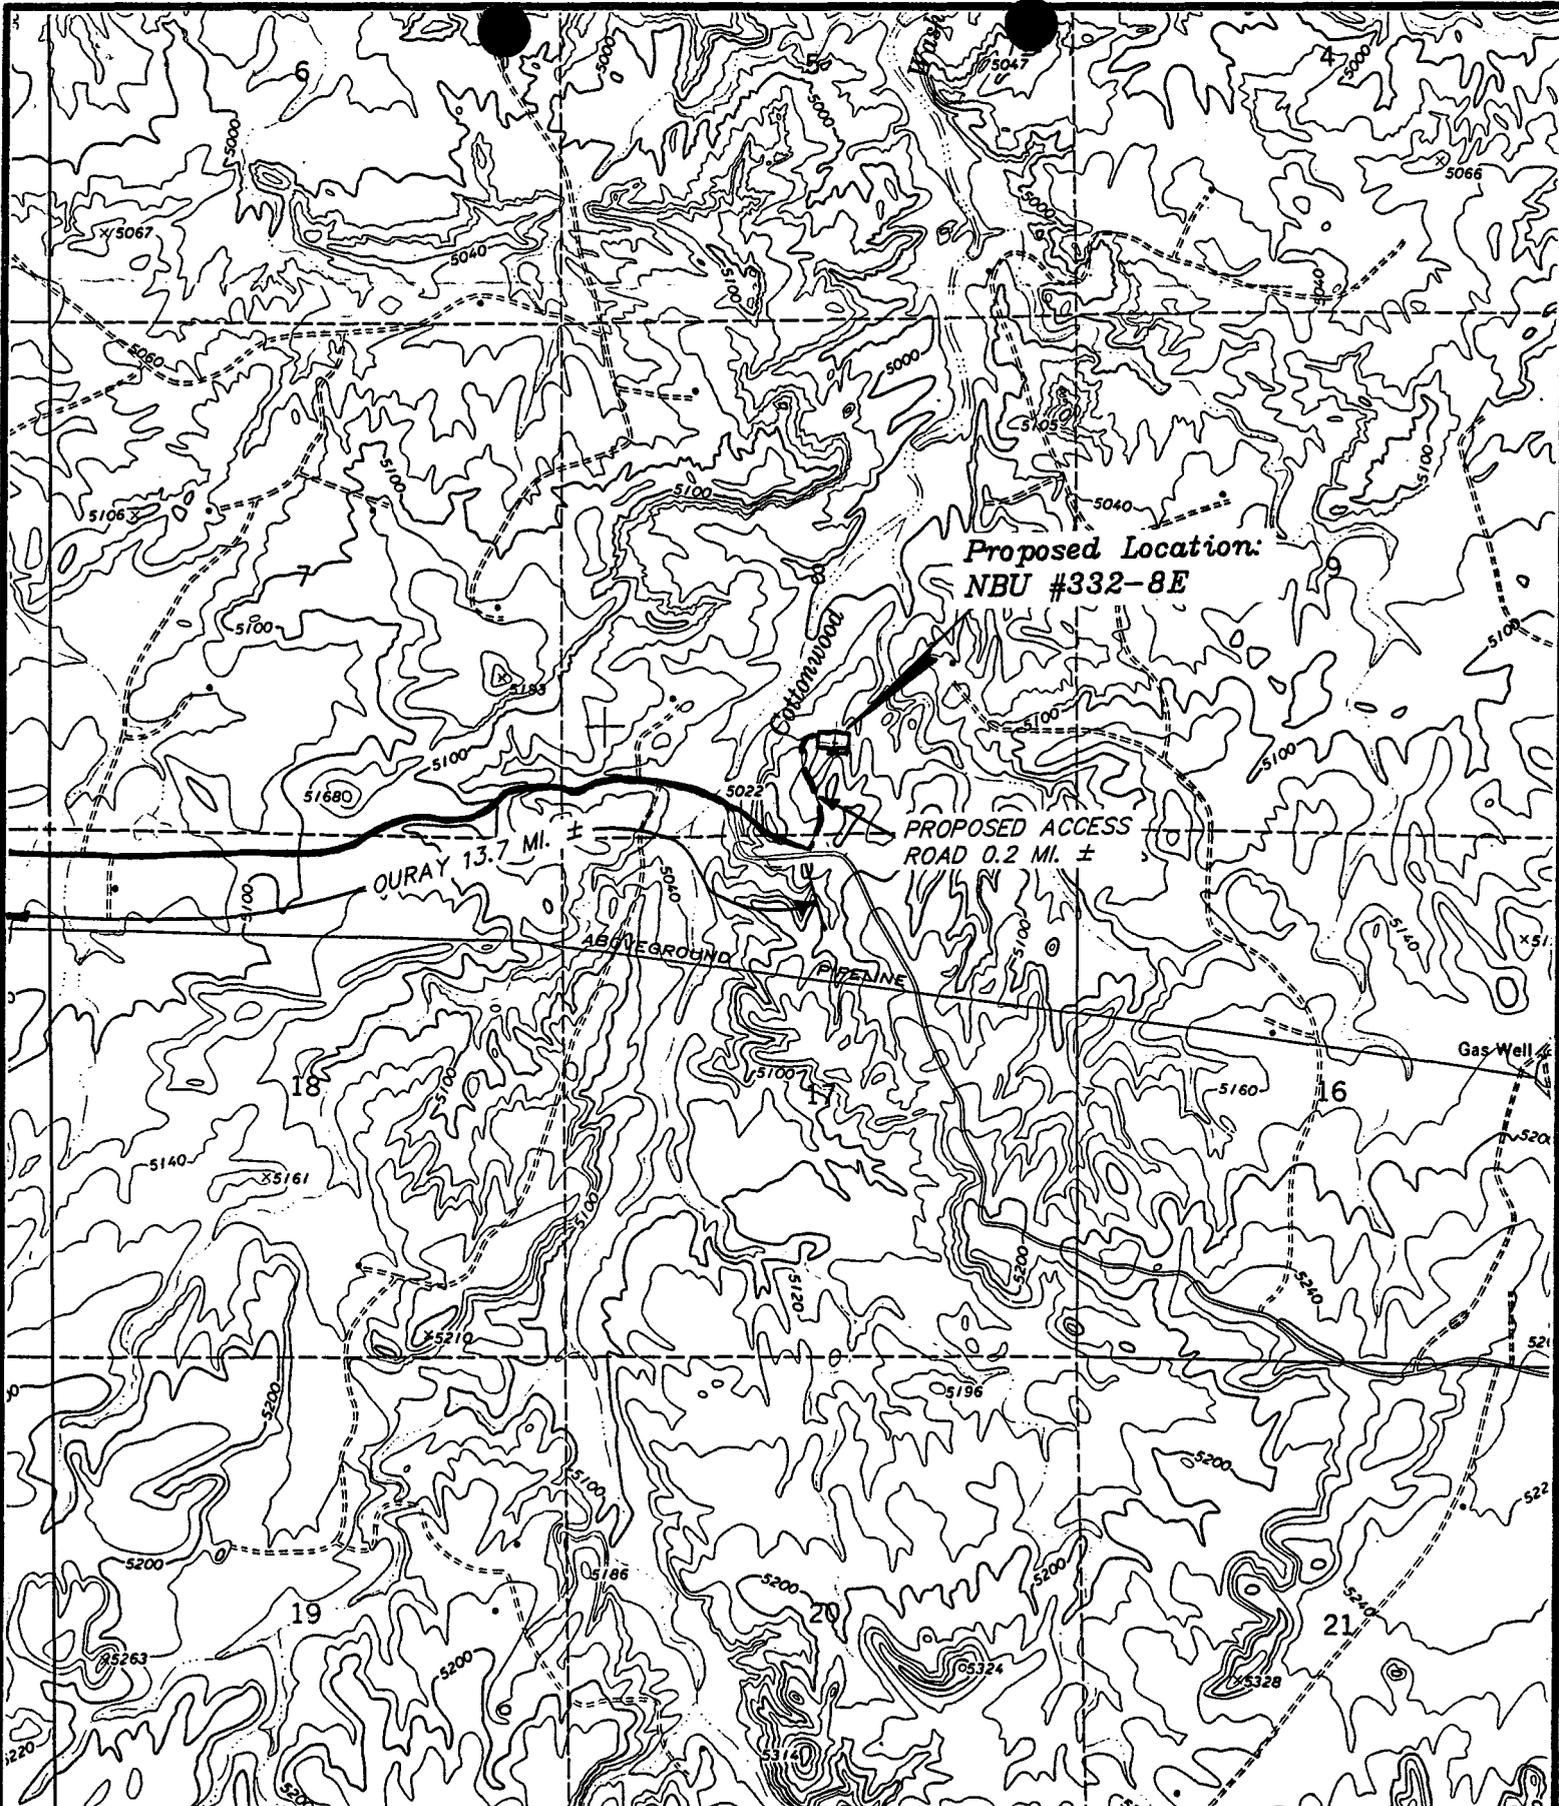

TOPOGRAPHIC

MAP "B"

SCALE: 1" = 2000'


DATE 9-16-91 MDA



ENRON OIL & GAS CO.

NBU #332-8E

SECTION 8, T10S, R21E, S.L.B.&M.

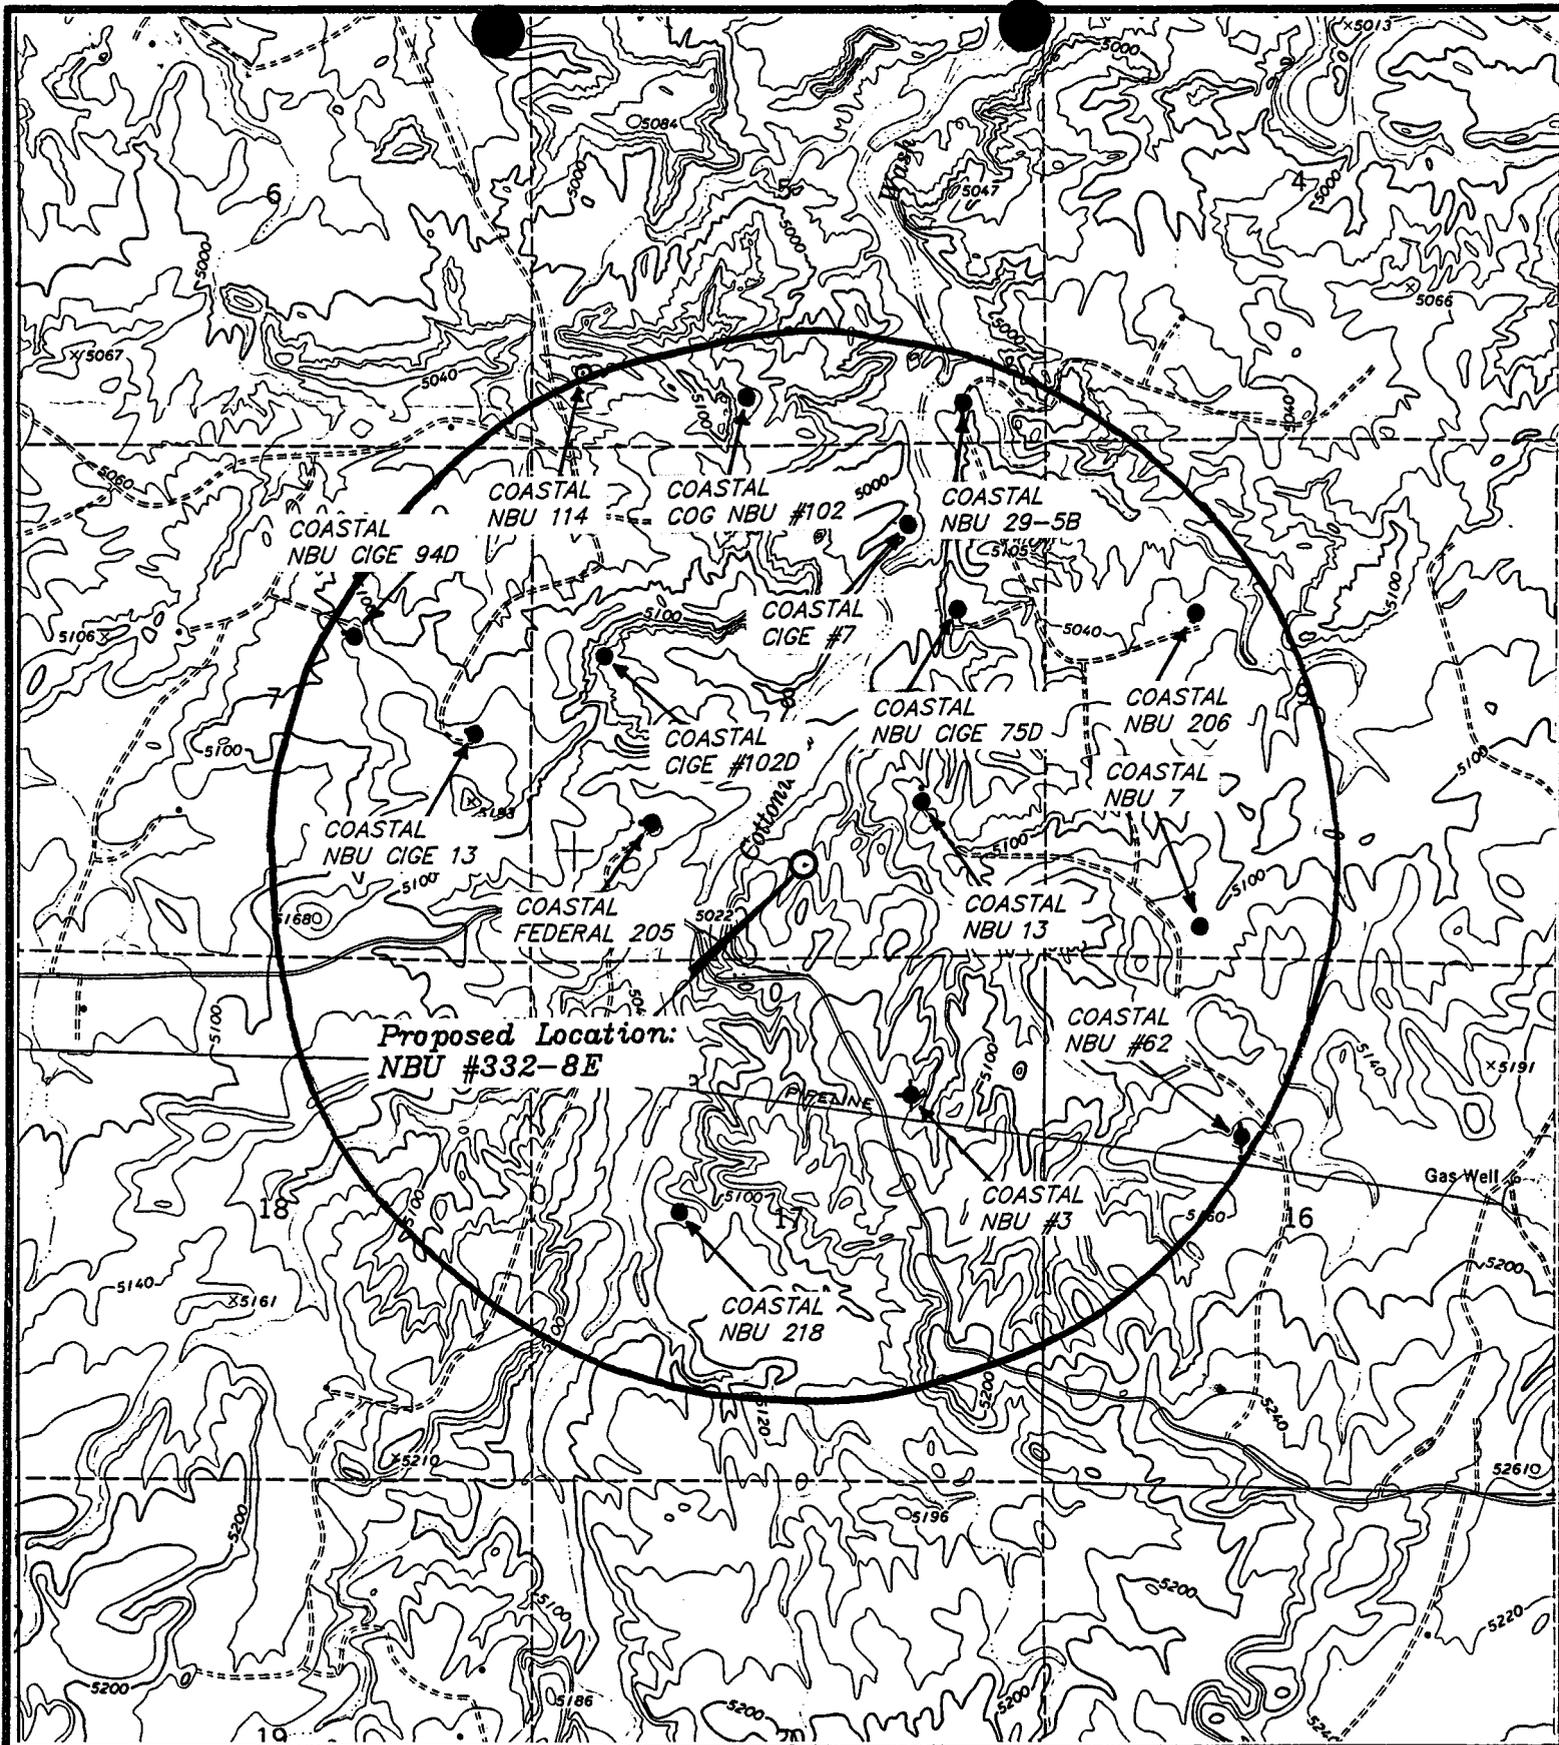

**LEGEND:**


- ⊕ = Water Wells
- = Abandoned Wells
- ◐ = Temporarily Abandoned Wells
- ⊙ = Disposal Wells
- = Drilling Wells
- = Producing Wells
- = Shut-in Wells



**ENRON OIL & GAS CO.**

NBU #332-8E  
 SECTION 8, T10S, R21E, S.L.B.&M.  
**TOPO MAP "C"**

DATE: 9-16-91 MDA

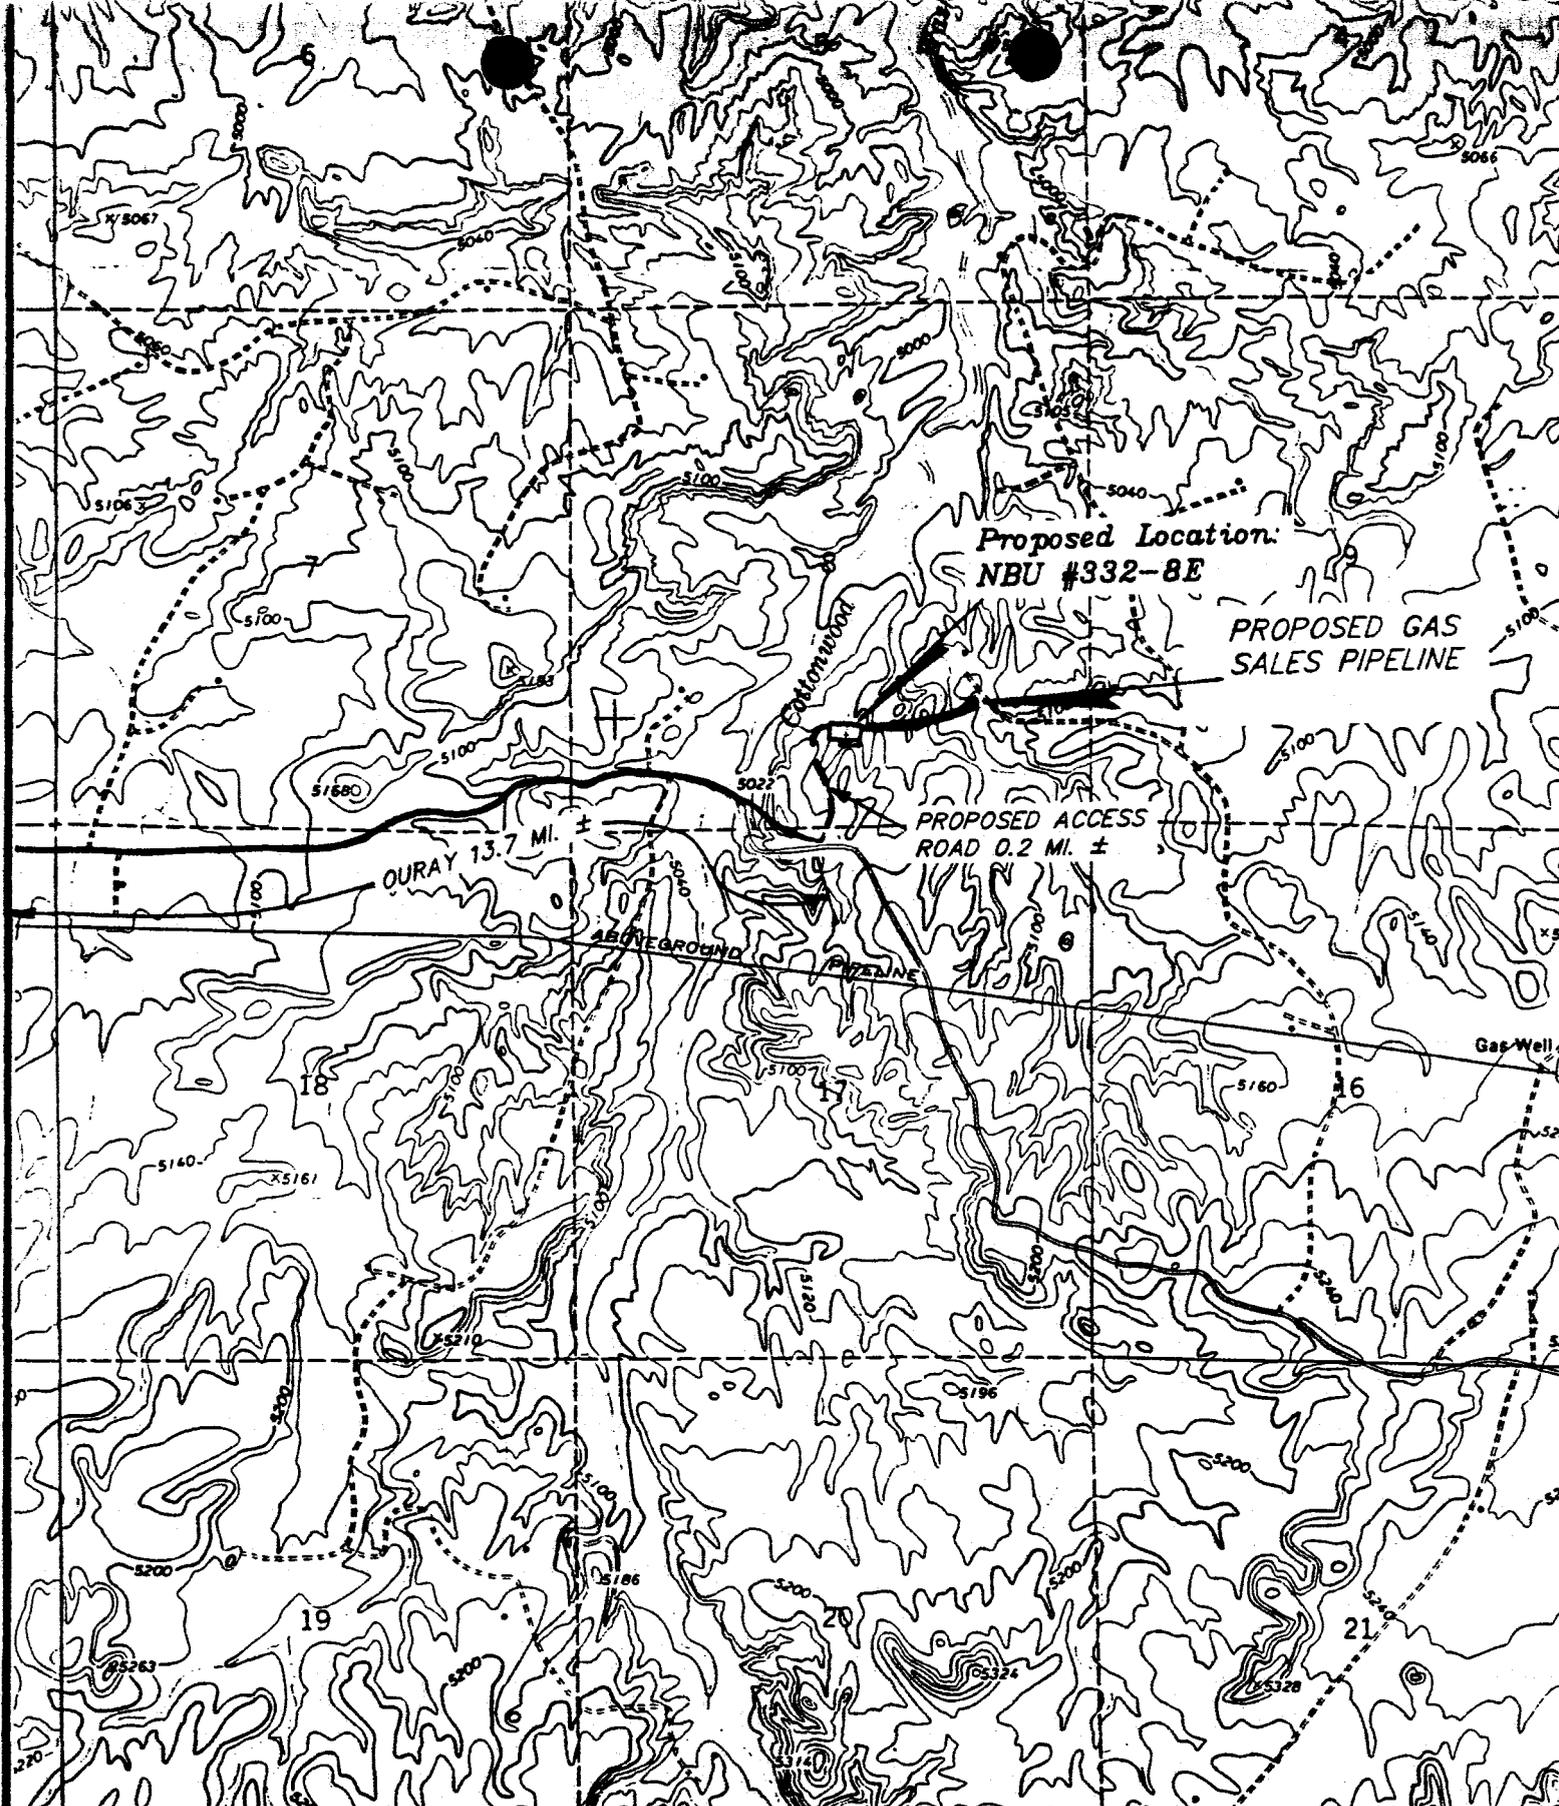

**EXHIBIT "A"**  
**GAS SALES PIPELINE**  
 SCALE: 1" = 2000'  
 DATE 9-16-91 MDA



**ENRON OIL & GAS CO.**  
 NBU #332-8E  
 SECTION 8, T10S, R21E, S.L.B.&M.

OPERATOR Enron Oil Gas N-0401 DATE 11-13-91

WELL NAME NB1 330-8F

SEC SWSE 8 T 10S R 01E COUNTY Mintah

43-047-30148  
API NUMBER

Redual (1)  
TYPE OF LEASE

CHECK OFF:

PLAT.

BOND

NEAREST WELL

LEASE

FIELD SLOM

POTASH OR OIL SHALE

PROCESSING COMMENTS:

Included in fourth supplemental POB approved 10-9-91  
water permit 49-1501 target duckburg  
Oil shale area

APPROVAL LETTER:

SPACING:

R615-2-3

Natural Buttes  
UNIT

R615-3-2

N/A  
CAUSE NO. & DATE

R615-3-3

STIPULATIONS:

✓ Oil shale area



# State of Utah

DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

Norman H. Bangerter  
Governor

Dee C. Hansen  
Executive Director

Dianne R. Nielson, Ph.D.  
Division Director

355 West North Temple  
3 Triad Center, Suite 350  
Salt Lake City, Utah 84180-1203  
801-538-5340

November 15, 1991

Enron Oil and Gas Company  
P.O. Box 1815  
Vernal, Utah 84078

Gentlemen:

Re: NBU 332-8E Well, 995 feet from the south line, 2508 feet from the east line, SW 1/4, SE 1/4, Section 8, Township 10 South, Range 21 East, Uintah County, Utah

Pursuant to Utah Code Ann. § 40-6-18, (1953, as amended), Utah Admin. R. 615-2-3, and Utah R. 615-3-4, approval to drill the referenced well is hereby granted.

In addition, the following specific actions are necessary to fully comply with this approval:

1. Compliance with the requirements of Utah Admin. R. 615-1 et seq., Oil and Gas General Rules.
2. Notification within 24 hours after drilling operations commence.
3. Submittal of Entity Action Form, Form 6, within five working days following commencement of drilling operations and whenever a change in operations or interests necessitates an entity status change.
4. Submittal of the Report of Water Encountered During Drilling, Form 7.
5. Prompt notification prior to commencing operations, if necessary, to plug and abandon the well. Notify Frank R. Matthews, Petroleum Engineer, (Office) (801)538-5340, (Home) (801)476-8613, or R.J. Firth, Associate Director, (Home) (801)571-6068.
6. Compliance with the requirements of Utah Admin. R. 615-3-20, Gas Flaring or Venting, if the well is completed for production.

Page 2  
Enron Oil and Gas Company  
NBU 332-8E Well  
November 15, 1991

Prior to commencement of the proposed drilling operations, plans for facilities for disposal of sanitary wastes at the drill site should be submitted to the local health department. These drilling operations and any subsequent well operations should be conducted in accordance with applicable state and local health department regulations. A list of local health departments and copies of applicable regulations are available from the Department of Environmental Quality, Division of Drinking Water/Sanitation, telephone (801)538-6159.

This approval shall expire one (1) year after date of issuance unless substantial and continuous operation is underway or an application for an extension is made prior to the approval expiration date. The API number assigned to this well is 43-047-32148.

Sincerely,



R.J. Firth  
Associate Director, Oil and Gas

ldc  
Enclosures  
cc: Bureau of Land Management  
J.L. Thompson  
WO11

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1. TYPE OF WORK: DRILL  DEEPEN  PLUG BACK

2. TYPE OF WELL: OIL WELL  GAS WELL  OTHER  SINGLE ZONE  MULTIPLE ZONE

3. NAME OF OPERATOR: Enron Oil & Gas Company

4. ADDRESS OF OPERATOR: P.O. Box 1815, Vernal, Utah 84078

5. LOCATION OF WELL (Report location clearly and in accordance with any State requirements \*):  
At surface: SW/4 SE/4 955' FSL & 2508' FEL  
At proposed prod. zone: *43-047-32148*

6. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE: 14 Miles Southeast of Ouray, Utah

7. DISTANCE FROM PROPOSED\* LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT. (Also to nearest drlg unit line, if any): 955'

8. DISTANCE FROM PROPOSED LOCATION\* TO NEAREST WELL, DRILLING COMPLETED, OR APPLICABLE FOR, ON THIS LEASE, FT.: Approx. 1369'

9. ELEVATIONS (Show whether DF, RT, GR, etc.): 5050' GR

13. LEASE DESIGNATION AND SERIAL N.: U-01791

14. IF INDIAN ALLOTTEE OR TRIBE NAME: Federal

15. UNIT AGREEMENT NAME: Natural Buttes Unit

16. FARM OR LEASE NAME: Natural Buttes Unit

17. WELL NO: 332-8E


18. FIELD AND POOL OR WILDCAT: NBU/Wasatch

19. SEC., T., R., M., OR BLE. AND SURVEY OR AREA: Sec. 8, T10S, R21E

20. COUNTY OR PARISH: Uintah STATE: Utah

21. PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
12 1/4"	9 5/8"	32.3#	200'	125 sx Class "G" + 2% CaCl2
7 7/8"	4 1/2"	10.5#	12345678910111213141516171819202122232425262728293031	+ 1/2 #/sx celloflake. 50/50 Pozmix + 2% gel + 10% salt to 400' above all zones of interest (+ 10% excess). Light cement (11 PPG±) + LCM to 100' above oil shale or fresh water intervals (+ 5% excess).

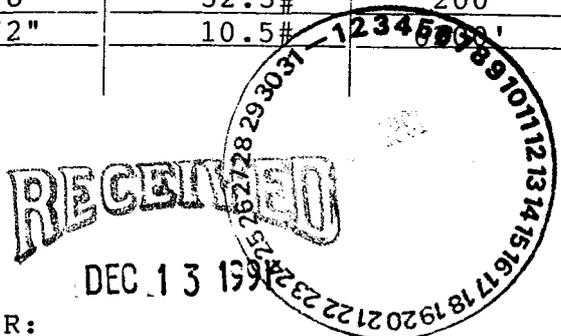

SEE ATTACHMENTS FOR:

- 8 Point Plan
- Drilling Program
- BOP Schematic
- Surface Use and Operating Plan
- Location Plat
- Location Layout
- Topographic Maps "A", "B", and "C"

DIVISION OF  
OIL GAS & MINING

Enron Oil & Gas Company will be the designated operator of the subject well under Nation Wide bond #81307603.

23. IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24. SIGNED Leola L. Wall TITLE Sr. Admin. Clerk DATE 10/31/91

(This space for Federal or State office use)

PERMIT NO. \_\_\_\_\_ APPROVAL DATE \_\_\_\_\_  
 ASSISTANT DISTRICT  
 MANAGER MINERALS  
 APPROVED BY [Signature] TITLE \_\_\_\_\_ DATE DEC 05 1991  
 CONDITIONS OF APPROVAL, IF ANY: \_\_\_\_\_

DIV O&M

\*See Instructions On Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

## CONDITION OF APPROVAL

The Interior Board of Land Appeals (IBLA) has ruled that the decision to approve an APD may be appealed under 43 CFR Part 4.21(a), by adversely affected parties. These appeal rights are further modified by 43 CFR Part 3165.3(b) which makes the decision, if contested, first subject to a State Director Review.

A Plan Conformance/NEPA Compliance Record has been completed on this Application for Permit to Drill (APD).

If the decision to approve the APD is contested under 43 CFR Part 3165.3(b), the operator will be immediately notified that no further action can be taken (unless otherwise directed by the authorized officer for protection of surface and subsurface resources) and cannot be resumed until the State Director has issued a decision on the Review. If the State Director rules favorably, the operator may be authorized to resume activities, but must recognize there is still the risk under 43 CFR Part 4.21(a) of an appeal to IBLA.

Any adversely affected party who contests a decision of the Authorized Officer may request an administrative review before the State Director. Such requests, including all supporting documentation, shall be filed with the appropriate State Director within twenty (20) business days from the date such decision was considered received. Upon request and showing good cause, an extension for submitting supporting data may be granted by the State Director. Requests for administrative review should be sent to: State Director, Bureau of Land Management, Utah State Office, P.O. Box 45155, Salt Lake City, Utah 84145-0155.

CONDITIONS OF APPROVAL  
APPLICATION FOR PERMIT TO DRILL

Company/Operator: Enron Oil & Gas Company

Well Name & Number: NBU 332-8E

Lease Number: U-01791

Location: SWSE Sec. 8 T.10S R. 21E

Surface Ownership: Public Lands administered by BLM

**NOTIFICATION REQUIREMENTS**

- Location Construction - at least forty-eight (48) hours prior to construction of location and access roads.
- Location Completion - prior to moving on the drilling rig.
- Spud Notice - at least twenty-four (24) hours prior to spudding the well.
- Casing String and Cementing - at least twenty-four (24) hours prior to running casing and cementing all casing strings.
- BOP and Related Equipment Tests - at least twenty-four (24) hours prior to initiating pressure tests.
- First Production Notice - within five (5) business days after new well begins, or production resumes after well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

## CONDITIONS OF APPROVAL FOR NOTICE TO DRILL

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Be aware fire restrictions may be in effect when location is being constructed and/or when well is being drilled. Contact the appropriate Surface Management Agency for information.

### A. DRILLING PROGRAM

1. Estimated Depth at Which Oil, Gas, Water, or Other Mineral Bearing Zones are Expected to be Encountered

Report ALL water shows and water-bearing sands to Tim Ingwell of this office. Copies of State of Utah form OGC-8-X are acceptable. If noticeable water flows are detected, submit samples to this office along with any water analyses conducted.

All usable water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling, will be recorded by depth and adequately protected. All oil and gas shows will be tested to determine commercial potential.

2. Pressure Control Equipment

The BOP and related equipment shall meet the minimum requirements of onshore Oil and Gas Order No. 2 for equipment and testing requirements, procedures, etc., and individual components shall be operable as designed. Chart recorders shall be used for all pressure tests.

Test charts, with individual test results identified, shall be maintained on location while drilling and shall be made available to a BLM representative upon request.

3. Casing Program and Auxiliary Equipment

Surface casing shall have centralizers on the bottom three joints, with a minimum of one centralizer per joint.

As a minimum, the usable water and oil shale resources shall be isolated and/or protected by having a cement top for the production casing at least 200 ft. above the top of the Mahogany oil shale, identified at ± 1940 ft. If gilsonite is encountered while drilling, it shall be isolated and or protected via the cementing program.

4. Mud Program and Circulating Medium

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

No chromate additives will be used in the mud system on Federal and Indian lands without prior BLM approval to ensure adequate protection of fresh water aquifers.

5. Coring, Logging and Testing Program

Daily drilling and completion progress reports shall be submitted to this office on a weekly basis.

All Drill Stem tests (DST) shall be accomplished during daylight hours, unless specific approval to start during other hours is obtained from the AO. However, DSTs may be allowed to continue at night if the test was initiated during daylight hours and the rate of flow is stabilized and if adequate lighting is available (i.e., lighting which is adequate for visibility and vaporproof for safe operations). Packers can be released, but tripping should not begin before daylight unless prior approval is obtained from the AO.

A cement bond log (CBL) shall be utilized to determine the top of cement (TOC) and bond quality for the production casing.

Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (Form 3160-4) will be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3164. Two copies of all logs, core descriptions, core analyses, well-test data, geologic summaries, sample description, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, will be filed with Form 3160-4. Samples (cuttings, fluids, and/or gases) will be submitted when requested by the AO.

6. Notifications of Operations

No location will be constructed or moved, no well will be plugged, and no drilling or workover equipment will be removed from a well to be placed in a suspended status without prior approval of the AO. If operations are to be suspended, prior approval of the AO will be obtained and notification given before resumption of operations.

Operator shall report production data to MMS pursuant to 30 CFR 216.5 using form MMS/3160.

Immediate Report: Spills, blowouts, fires, leaks, accidents, or any other unusual occurrences shall be promptly reported in accordance with the requirements of NTL-3A or its revision.

If a replacement rig is contemplated for completion operations, a "Sundry Notice" (Form 3160-5) to that effect will be filed, for prior approval of the AO, and all conditions of this approved plan are applicable during all operations conducted with the replacement rig.

The date on which production is commenced or resumed will be construed for oil wells as the date on which liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which liquid hydrocarbons are first produced into a permanent storage facility, whichever first occurs; and, for gas wells as the date on which associated liquid hydrocarbons are first sold or shipped from a temporary storage facility, such as a test tank, and for which a run ticket is required to be generated or, the date on which gas is first measured through permanent metering facilities, whichever first occurs.

Should the well be successfully completed for production, the AO will be notified when the well is placed in a producing status. Such notification will be sent by telegram or

other written communication, not later than five (5) days following the date on which the well is placed on production.

Gas produced from this well may not be vented or flared beyond an initial authorized test period of 30 days or 50 MMCF following its completion, whichever occurs first, without the prior written approval of the Authorized Officer. Should gas be vented or flared without approval beyond the authorized test period, the operator may be directed to shut-in the well until the gas can be captured or approval to continue venting or flaring as uneconomic is granted and the operator shall be required to compensate the lessor for that portion of the gas vented or flared without approval which is determined to have been avoidably lost.

A schematic facilities diagram as required by 43 CFR 3162.7-2, 3162.7-3, and 3162.7-4 shall be submitted to the appropriate District Office within thirty (30) days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with 43 CFR 3162.7-4.

No well abandonment operations will be commenced without the prior approval of the AO. In the case of newly drilled dry holes or failures, and in emergency situations, oral approval will be obtained from the AO. A "Subsequent Report of Abandonment" Form 3160-5, will be filed with the AO within thirty (30) days following completion of the well for abandonment. This report will indicate where plugs were placed and the current status of surface restoration. Final abandonment will not be approved until the surface reclamation work required by the approved APD or approved abandonment notice has been completed to the satisfaction of the AO or his representative, or the appropriate Surface Managing Agency.

7. Other Information

All loading lines will be placed inside the berm surrounding the tank battery.

All off-lease storage, off-lease measurement, or commingling onlease or off-lease will have prior written approval from the AO.

Gas meter runs for each well will be located within 500 feet of the wellhead. The gas flowline will be buried or anchored down from the wellhead to the meter and 500 feet downstream of the meter run or any production facilities. Meter runs will be housed and/or fenced.

The oil and gas measurement facilities will be installed on the well location. The oil and gas meters will be calibrated in place prior to any deliveries. Tests for meter accuracy will be conducted monthly for the first three months on new meter installations and at least quarterly thereafter. The AO will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports will be submitted to the Vernal District Office. All meter measurement facilities will conform with Onshore Oil & Gas Order No. 4 for liquid hydrocarbons and Onshore Oil & Gas Order No. 5 for natural gas measurement.

The use of materials under BLM jurisdiction will conform to 43 CFR 3610.2-3.

There will be no deviation from the proposed drilling and/or workover program without prior approval from the AO. Safe drilling and operating practices must be observed. All

wells, whether drilling, producing, suspended, or abandoned will be identified in accordance with 43 CFR 3162.

"Sundry Notice and Report on Wells" (Form 3160-5) will be filed for approval for all changes of plans and other operations in accordance with 43 CFR 3162.3-2.

Section 102(b)(3) of the Federal Oil and Gas Royalty Management Act of 1982, as implemented by the applicable provisions of the operating regulations at Title 43 CFR 3162.4-1(c), requires that "not later than the 5th business day after any well begins production on which royalty is due anywhere on a lease site or allocated to a lease site, or resumes production in the case of a well which has been off production for more than 90 days, the operator shall notify the authorized officer by letter or sundry notice, Form 3160-5, or orally to be followed by a letter or sundry notice, of the date on which such production has begun or resumed."

If you fail to comply with this requirement in the manner and time allowed, you shall be liable for a civil penalty of up to \$10,000 per violation for each day such violation continues, not to exceed a maximum of 20 days. See Section 109(c)(3) of the Federal Oil and Gas Royalty Management Act of 1982 and the implementing regulations at Title 43 CFR 3162.4-1(b)(5)(ii).

APD approval is valid for a period of one (1) year from the signature date. An extension period may be granted, if requested, prior to the expiration of the original approval period.

In the event after-hours approvals are necessary, please contact one of the following individuals:

Gerald E. Kenczka      (801) 781-1190  
Petroleum Engineer

Ed Forsman              (801) 789-7077  
Petroleum Engineer

BLM FAX Machine      (801) 789-3634

## EPA'S LIST OF NONEXEMPT EXPLORATION AND PRODUCTION WASTES

While the following wastes are nonexempt, they are not necessarily hazardous.

Unused fracturing fluids or acids

Gas plant cooling tower cleaning wastes

Painting wastes

Oil and gas service company wastes, such as empty drums, drum rinsate, vacuum truck rinsate, sandblast media, painting wastes, spent solvents, spilled chemicals, and waste acids

Vacuum truck and drum rinsate from trucks and drums, transporting or containing nonexempt waste

Refinery wastes

Liquid and solid wastes generated by crude oil and tank bottom reclaimers

Used equipment lubrication oils

Waste compressor oil, filters, and blowdown

Used hydraulic fluids

Waste solvents

Waste in transportation pipeline-related pits

Caustic or acid cleaners

Boiler cleaning wastes

Boiler refractory bricks

Incinerator ash

Laboratory wastes

Sanitary wastes

Pesticide wastes

Radioactive tracer wastes

Drums, insulation and miscellaneous solids.

B. DRILLING PROGRAM

1. Methods for Handling Waste Disposal

At the onsite it was not firmly decided whether or not to line the pit. That decision will depend on the subsurface soils encountered during construction. The reserve pit shall be lined if necessary to conserve water and drilling fluid.

"If a plastic nylon reinforced liner is used, it will be a minimum of 10 mil thickness with sufficient bedding (either straw or dirt) to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash, scrap pipe, etc., that could puncture the liner will be disposed of in the pit. More stringent protective requirements may be deemed necessary by the A.O."

After first production, produced waste water will be confined to a lined pit or storage tank for a period not to exceed ninety (90) days. During the 90 day period, in accordance with NTL-2B, an application for approval of a permanent disposal method and location, along with required water analysis, shall be submitted for the AO's approval. Failure to file an application within the time allowed will be considered an incident of noncompliance.

2. Additional Surface Stipulations

No construction or drilling activities shall be conducted between May 15 and June 20 because the area has been identified as crucial pronghorn habitat. Modifications may be required to the Surface Use Plan to protect the pronghorn during the kidding period from May 15 to June 20.

Two (2) silt catchment dams will be constructed according to BLM specifications where flagged. One to the northeast of the pad and the second west of the access road. The dam on the west should be large enough to protect the area where the access road enters the pad. The existing drainage is to be rerouted around the pad there.

On the flowline construction planned for the well, BLM also places these Conditions of Approval:

1. No blading will be allowed on surface pipelines.
2. Vehicle use will be restricted to the pipeline route. It would be preferable if the pipe were welded in central staging areas and then dragged across the ROW with a CAT.
3. The Bookcliff Resource Area minerals staff will be notified 24 hours prior to starting construction.
4. All surface lines will be either black or brown in color.
5. Construction of the pipeline will not occur during periods of wet soil conditions.
6. If any cultural resources are found during construction, all work will stop and the Vernal District BLM Office notified.
7. The metering of all gas will be done in accordance with On Shore Order No. 5.

8. No construction will be allowed from May 15 to June 20 because the area is a crucial antelope kidding area, unless it is approved by the area wildlife biologist.

DIVISION OF OIL, GAS AND MINING

SPUDDING INFORMATION

NAME OF COMPANY: ENRON 43-047-32148

WELL NAME: NBU 332-8E

Section 8 Township 10S Range 21E County UINTAH

Drilling Contractor COASTAL

Rig # 2

SPUDDED: Date 1-10-92

Time 11:00 AM

How DRY HOLE

Drilling will commence \_\_\_\_\_

Reported by STEVE (LEON ROSS)

Telephone # 722-4469

Date 1-10-92 SIGNED CAK

# ENRON

## OIL & GAS COMPANY

P.O. BOX 1815, VERNAL, UTAH 84078 (801)789-0790

January 14, 1992

Bureau of Land Management  
Vernal District  
170 South 500 East  
Vernal, Utah 84078

RE: SUNDRY NOTICE - BOP SPEC. REVISIONS  
NBU 301-24E - NBU 304-18E  
NBU 305-7E - NBU 331-35E  
NBU 332-8E *42-047-22148*  
Secs. 24, 18, 7 35 & 8,  
T9S& 10S, R21E & 22E S.L.B.&M  
Uintah County, Utah  
Lease Nos. U-149076, U-0575, 7,  
U-014976, U-010954A, and U-01791


Attn: Ed Forsman

Dear Mr. Forsman:

Please find attached a Sundry Notice of BOP specification revision for the subject wells.

If you require further information concerning this matter, please contact this office.

Very truly yours,  
ENRON OIL & GAS COMPANY

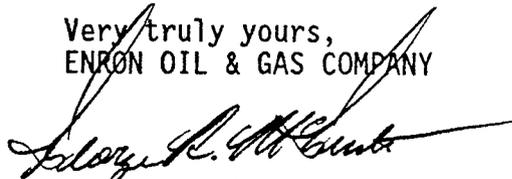

George R. McBride  
Sr. Production Foreman

cc: Division of Oil Gas & Mining  
Big Piney Office  
Doug Weaver/Toni Miller  
Suzanne Saldivar - Houston  
File

RECEIVED

JAN 15 1992

DIVISION OF  
OIL GAS & MINING

/lwSundry

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE (When approved.)  
(Other instruction on reverse side)  
Budget Bureau No. 1004-0135  
Expires August 31, 1985

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT-" for such proposals.)

5. LEASE DESIGNATION AND SERIAL NO.  
U-149076, U-0575, U-0149767  
U-010954A & U-01791

1. OIL WELL  GAS WELL  OTHER

7. UNIT AGREEMENT NAME  
Natural Buttes Unit

2. NAME OF OPERATOR  
ENRON OIL & GAS COMPANY

8. FARM OR LEASE NAME  
Natural Buttes Unit

3. ADDRESS OF OPERATOR  
P.O. BOX 1815, VERNAL, UTAH 84078

9. WELL NO.  
301-24E, 304-18E, 305-7E,  
331-35E & 332-8E

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.\*  
See also space 17 below.)  
At surface 700' FSL & 2450' FEL SW/SE, 782' FSL, & 1783' FEL SW/SE  
670' FNL & 1950' FWL NE/NW  
1531' FNL & 1153' FEL SE/NE  
955' FSL & 2508' FEL SW/SE

10. FIELD AND POOL OR WILDCAT  
NBU/Wasatch

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Secs. 24, 18, 7, 35 & 8  
T9S & 10S, R 21E & 22E

14. PERMIT NO.  
43-047-32131, 32130,  
32135, 32147, & 32148

15. ELEVATIONS (show whether DF, RY, GR, etc.)  
4892', 4766', 4681', 5092', 5050'

12. COUNTY OR PARISH  
Uintah

13. STATE  
Utah

16. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF   
FRACTURE TREAT   
SHOOT OR ACIDIZE   
REPAIR WELL   
(Other)

PULL OR ALTER CASING   
MULTIPLE COMPLETE   
ABANDON\*   
CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF   
FRACTURE TREATMENT   
SHOOTING OR ACIDIZING   
(OTHER)

REPAIRING WELL   
ALTERING CASING   
ABANDONMENT\*

(NOTE: Report results of multiple completion on Well Completion of Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Enron Oil & Gas Company proposes to revise the BOP specifications for the subject wells from a 3000 psi system to a 2000 psi system. Based on anticipated subsurface pressures as specified in the 8 Point Plans of the respective APD's, the maximum anticipated surface pressure to which the BOP would be subjected would be as follows:

- NBU 301-24E: 3230 psi - (6875' X .22 psi/ft) = 1717 psi.
- NBU 304-18E: 3350 psi - (7125' X .22 psi/ft) = 1783 psi.
- NBU 305-7E: 3450 psi - (7220' X .22 psi/ft) = 1883 psi.
- NBU 331-35E: 3400 psi - (7250' X .22 psi/ft) = 1805 psi.
- NBU 332-8E: 3100 psi - (6200' X .22 psi/ft) = 1736 psi.

NOTE: The 8 Point Plan for the NBU 332-8E incorrectly indicated an anticipated maximum BHP of 4100 psi. The correct maximum BHP should be 3100 psi.

ACCEPTED BY THE STATE  
OF UTAH DIVISION OF  
OIL, GAS, AND MINING

RECEIVED

JAN 15 1992

DATE: 1-16-92  
BY: J.A. Matthews  
DIVISION OF OIL GAS & MINING

18. I hereby certify that the foregoing is true and correct  
SIGNED Linda L. Wallace TITLE Sr. Admin. Cl. DATE 1-14-92  
(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY:

\*See Instructions on Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

# ENRON

## OIL & GAS COMPANY

P.O. BOX 1815, VERNAL, UTAH 84078 (801)789-0790

January 20, 1992

Bureau of Land Management  
Vernal District  
170 South 500 East  
Vernal, Utah 84078

RE: SUNDRY NOTICE - SPUDDING  
NATURAL BUTTES UNIT 332-8E  
Secs. 8, T10S, R21E  
Uintah County, Utah  
Lease No. U-01791


Attn: Ed Forsman

Dear Mr. Forsman:

Please find attached a Sundry Notice with spudding information on the subject wells.

If you require further information concerning this matter, please contact this office.

Very truly yours,  
ENRON OIL & GAS COMPANY

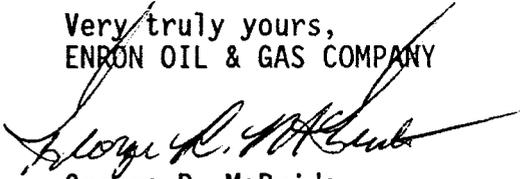  
George R. McBride  
Sr. Production Foreman

cc: Division of Oil Gas & Mining  
Big Piney Office  
Doug Weaver/Toni Miller  
Suzanne Saldivar - Houston  
File

/lwSundry

RECEIVED

JAN 22 1992

DIVISION OF  
OIL GAS & MINING

**UNITED STATES  
 DEPARTMENT OF THE INTERIOR  
 BUREAU OF LAND MANAGEMENT**

SUBMIT IN TRIPLICATE:  Not approved.  
 (Other instruction on reverse side) Budget Bureau No. 1004-0135  
 Expires August 31, 1985

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
 Use "APPLICATION FOR PERMIT-" for such proposals.)

5. LEASE DESIGNATION AND SERIAL NO.  
**u-01791**  
 6. IF INDIAN, ALLOTTEE OR TRIBE NAME

1. OIL WELL  GAS WELL  OTHER

7. UNIT AGREEMENT NAME  
**Natural Buttes Unit**

2. NAME OF OPERATOR  
**ENRON OIL & GAS COMPANY**

8. FARM OR LEASE NAME  
**Natural Buttes Unit**

3. ADDRESS OF OPERATOR  
**P.O. BOX 1815, VERNAL, UTAH 84078**

9. WELL NO.  
**332-8E**

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.\*  
 See also space 17 below.)  
 At surface  
**955' FSL & 2508' FEL SW SE**

10. FIELD AND POOL OR WILDCAT  
**NBU/Wasatch**  
 11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
**Sec. 8, T10S, R21E**

14. PERMIT NO.  
**43-047-32148**

15. ELEVATIONS (show whether DF, RY, GR, etc.)  
**5050' GR**

12. COUNTY OR PARISH  
**Uintah**  
 13. STATE  
**Utah**

**Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data**

**NOTICE OF INTENTION TO:**

TEST WATER SHUT-OFF   
 FRACTURE TREAT   
 SHOOT OR ACIDIZE   
 REPAIR WELL   
 (Other)

PULL OR ALTER CASING   
 MULTIPLE COMPLETE   
 ABANDON\*   
 CHANGE PLANS

**SUBSEQUENT REPORT OF:**

WATER SHUT-OFF   
 FRACTURE TREATMENT   
 SHOOTING OR ACIDIZING   
 (OTHER) **Spudding**

REPAIRING WELL   
 ALTERING CASING   
 ABANDONMENT\*

(NOTE: Report results of multiple completion on Well Completion of Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

**Enron Oil & Gas Company states the subject well was spudded 1/11/92  
 12 1/4" hole was drilled to 225'. 9 5/8" casing was set @ 227' and cemented with 125  
 sx Class "G" cement.  
 Oral notice was call to Ed Forsman of BLM, Vernal District Office and  
 Carol Kubly of UOGCC 1/11/92.**

**RECEIVED**  
**JAN 22 1992**  
**DIVISION OF**  
**OIL GAS & MINING**

18. I hereby certify that the foregoing is true and correct

SIGNED Linda L. Warr

TITLE **Sr. Admin. Clerk**

DATE **1/20/92**

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

\*See Instructions on Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

# ENRON

## OIL & GAS COMPANY

P.O. BOX 1815, VERNAL, UTAH 84078 (801)789-0790

January 20, 1992

Bureau of Land Management  
Vernal District  
170 South 500 East  
Vernal, Utah 84078

RE: SUNDRY NOTICE - WATER ENCOUNTER  
NATURAL BUTTES UNIT 332-8E  
Secs. 8, T10S, R21E  
Uintah County, Utah  
Lease No. U-01791


Attn: Ed Forsman

Dear Mr. Forsman:

Please find attached a Sundry Notice with water encountered information on the subject wells.

If you require further information concerning this matter, please contact this office.

Very truly yours,  
ENRON OIL & GAS COMPANY



George R. McBride  
Sr. Production Foreman

cc: Division of Oil Gas & Mining  
Big Piney Office  
Doug Weaver/Toni Miller  
Suzanne Saldivar - Houston  
File

/lwSundry

RECEIVED

JAN 22 1992

DIVISION OF  
OIL GAS & MINING

**UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT**

SUBMIT IN TRIPLICATE\* approved.  
(Other instruction on reverse side) Budget Bureau No. 1004-0135  
Expires August 31, 1985

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT-" for such proposals.)

1. OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER <input type="checkbox"/>		5. LEASE DESIGNATION AND SERIAL NO. <b>U-01791</b>	
2. NAME OF OPERATOR <b>ENRON OIL &amp; GAS COMPANY</b>		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:	
3. ADDRESS OF OPERATOR <b>P.O. BOX 1815, VERNAL, UTAH 84078</b>		7. UNIT AGREEMENT NAME <b>Natural Buttes Unit</b>	
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface <b>955' FSL &amp; 2508' FEL SW SE</b>		8. FARM OR LEASE NAME <b>Natural Buttes Unit</b>	
14. PERMIT NO. <b>43-047-32148</b>		9. WELL NO. <b>332-8E</b>	
15. ELEVATIONS (show whether DF, RY, GR, etc.) <b>5050' GR</b>		10. FIELD AND POOL OR WILDCAT <b>NBU/Wasatch</b>	
		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA <b>Sec. 8, T10S, R21E</b>	12. COUNTY OR PARISH <b>Uintah</b>
		13. STATE <b>Utah</b>	

16. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
TEST WATER SHUT-OFF <input type="checkbox"/>	PULL OR ALTER CASING <input type="checkbox"/>	WATER SHUT-OFF <input type="checkbox"/>	REPAIRING WELL <input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	MULTIPLE COMPLETE <input type="checkbox"/>	FRACTURE TREATMENT <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	ABANDON* <input type="checkbox"/>	SHOOTING OR ACIDIZING <input type="checkbox"/>	ABANDONMENT* <input type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	(OTHER) <u>Water Encounter</u>	<input checked="" type="checkbox"/>
(Other) <input type="checkbox"/>		(NOTE: Report results of multiple completion on Well Completion of Recompletion Report and Log form.)	

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

**A water flow was encountered on the subject well at 1380' and a sample was caught at that depth. The Water Analysis Report will be forwarded to your office.**

**RECEIVED**

JAN 22 1992

DIVISION OF  
OIL GAS & MINING

18. I hereby certify that the foregoing is true and correct

SIGNED <u>Linda S. Wall</u>	TITLE <b>Sr. Admin. Clerk</b>	DATE <b>1/20/92</b>
-----------------------------	-------------------------------	---------------------

APPROVED BY	TITLE	DATE
-------------	-------	------

CONDITIONS OF APPROVAL, IF ANY:

\*See Instructions on Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

REPORT OF WATER ENCOUNTERED DURING DRILLING - FORM 7 (1/89)

RECEIVED

JAN 22 1992

1. Well name and number: NBU # 332-8-E  
 API number: 43-047-32148
2. Well location: QQ SW/SE section 8 township 10S range 21-E county WINTAH
3. Well operator: ENRON OIL & GAS CO.  
 Address: P.O. Box 250 phone: 307-276-3331  
Big Piney, WY 83113
4. Drilling contractor: CONSTAL DIEI  
 Address: Box 749 phone: 303-572-1121  
DENVER, Colorado, 80201-9959

5. Water encountered (continue on reverse side if necessary)

Depth		Volume (flow rate or head)	Quality (fresh or salty)
from	to		
1380'	?	?	?

6. Formation tops: LEASITA

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

If an analysis has been made of the water encountered, please attach a copy of the report to this form.

I certify that this report is true and complete to the best of my knowledge.

Name Tommy F. Hufford Signature Tommy F. Hufford  
 Title Consultant Date 1/16/92

Comments:

OPERATOR Enron Oil & Gas Company  
 ADDRESS P.O. Box 1815  
Vernal, Utah 84078

OPERATOR ACCT. NO. 10401

WELL NO.	CURRENT ENTITY NO.	NEW ENTITY NO.	API NUMBER	WELL NAME	WELL LOCATION					SPUD DATE	EFFECTIVE DATE
					QQ	SC	TP	RG	COUNTY		
	99999	02900	43-047-32148	Natural Buttes Unit 332-8E	SWSE	8	T10S	21E	Uintah	1/11/92	1/11/92
COMMENTS: OPERATOR CHANGE - Changing over to Coastal for reporting. <i>No until WCR is received.</i> <i>* WCR received 4-17-92, operator to Coastal eff. 3-17-92, entity added. JCP</i>											
COMMENTS:											
COMMENTS:											
COMMENTS:											
COMMENTS:											

**RECEIVED**

JAN 22 1992

DIVISION OF  
 OIL GAS & MINING

*Luisa P. ...*  
 Signature

Sr. admin. Clerk 1/20/92  
 Title Date

Phone No. (801) 789-0790

- A - Establish new entity for new well (single well only)
- B - Add new well to existing entity (group or unit well)
- C - Re-assign well from one existing entity to another existing entity
- D - Re-assign well from one existing entity to a new entity
- E - Other (explain in comments section)

Use COMMENT section to explain why each Action Code was selected.

# ENRON

## OIL & GAS COMPANY

P.O. BOX 1815, VERNAL, UTAH 84078 (801)789-0790

March 20, 1992

Bureau of Land Management  
Vernal District  
170 South 500 East  
Vernal, Utah 84078

RE: SUNDRY NOTICE - INITIAL PRODUCTION  
NATURAL BUTTES UNIT 332-8E  
Sec. 8, T10S, R21E  
Uintah County, Utah  
Lease No. U-01791


Attn: Ed Forsman:

Dear Mr. Forsman:

Please find attached for your approval a Sundry Notice on subject well with initial production information.

If you require further information concerning this matter, please contact this office.

Very truly yours,  
ENRON OIL & GAS COMPANY

  
George R. McBride  
Sr. Production Foreman

cc: Division of Oil Gas & Mining  
Big Piney Office  
Doug Weaver/Toni Miller  
Suzanne Saldivar - Houston  
Diane Cross - Houston  
File

/lwSundry

RECEIVED

MAR 23 1992

DIVISION OF  
OIL GAS & MINING

**UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT**

SUBMIT IN TRIPLICATE Form approved.  
(Other instruction on reverse side) Budget Bureau No. 1004-0135  
Expires August 31, 1985

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT-" for such proposals.)

5. LEASE DESIGNATION AND SERIAL NO.  
**U-01791**

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

1. OIL WELL  GAS WELL  OTHER

7. UNIT AGREEMENT NAME  
**NATURAL BUTTES UNIT**

2. NAME OF OPERATOR  
**ENRON OIL & GAS COMPANY**

8. FARM OR LEASE NAME  
**NATURAL BUTTES UNIT**

3. ADDRESS OF OPERATOR  
**P.O. BOX 1815, VERNAL, UTAH 84078**

9. WELL NO.  
**332-8E**

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.\*  
See also space 17 below.)  
At surface  
**955' FSL & 2508' FSL SW/SE**

10. FIELD AND POOL OR WILDCAT  
**NBU/WASATCH**

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
**SEC. 8, T10S, R21E**

14. PERMIT NO.  
**43-047-32148**

15. ELEVATIONS (show whether DF, RY, GR, etc.)  
**5050'**

12. COUNTY OR PARISH  
**UINTAH**

13. STATE  
**UTAH**

**Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data**

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF	<input type="checkbox"/>	PULL OR ALTER CASING	<input type="checkbox"/>
FRACTURE TREAT	<input type="checkbox"/>	MULTIPLE COMPLETE	<input type="checkbox"/>
SHOOT OR ACIDIZE	<input type="checkbox"/>	ABANDON*	<input type="checkbox"/>
REPAIR WELL	<input type="checkbox"/>	CHANGE PLANS	<input type="checkbox"/>
(Other)			<input type="checkbox"/>

SUBSEQUENT REPORT OF:

WATER SHUT-OFF	<input type="checkbox"/>	REPAIRING WELL	<input type="checkbox"/>
FRACTURE TREATMENT	<input type="checkbox"/>	ALTERING CASING	<input type="checkbox"/>
SHOOTING OR ACIDIZING	<input type="checkbox"/>	ABANDONMENT*	<input type="checkbox"/>
(OTHER)		<b>INITIAL PRODUCTION</b>	<input checked="" type="checkbox"/>

(NOTE: Report results of multiple completion on Well Completion of Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

**Subject well was turned to CIG for sales at 12:30 PM, March 19, 1992.  
537 MCFD, TP 989, CP 1038.**

**RECEIVED**  
**MAR 23 1992**  
**DIVISION OF OIL GAS & MINING**

18. I hereby certify that the foregoing is true and correct

SIGNED *Linda S. Wall* TITLE **Sr. Admin. Clerk** DATE **3/20/92**  
(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY:

\*See Instructions on Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

# ENRON

## OIL & GAS COMPANY

P.O. BOX 1815, VERNAL, UTAH 84078 (801)789-0790

March 26, 1992

Bureau of Land Management  
Vernal District  
170 South 500 East  
Vernal, Utah 84078

RE: NATURAL BUTTES UNIT <sup>332</sup>331-8E  
Sec. 8, T10S, R21E  
Uintah County, Utah  
Lease No. U-01791


Attn: Ed Forsman:

Dear Mr. Forsman:

Please find attached a Sundry Notice requesting water disposal method approval.

If you have any questions or need additional information, please contact this office.

Very truly yours,  
ENRON OIL & GAS COMPANY

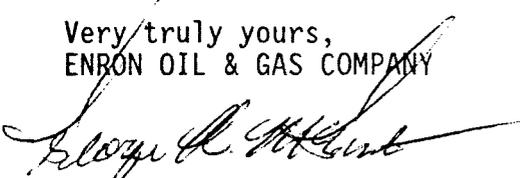  
George R. McBride  
Sr. Production Foreman

cc: Division of Oil Gas & Mining  
Big Piney Office  
Doug Weaver/Toni Miller  
Suzanne Saldivar - Houston  
Diane Cross - Houston  
File

/lwSundry

RECEIVED

MAR 27 1992

DIVISION OF  
OIL GAS & MINING

**UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT**

SUBMIT IN TRIPLICATE  
(Other instruction on  
reverse side)

Form approved.  
Budget Bureau No. 1004-0135  
Expires August 31, 1985

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT-" for such proposals.)

5. LEASE DESIGNATION AND SERIAL NO.  
**U-01791**

6. IF INDIAN ALLOTTEE OR TRIBE NAME

1. OIL WELL  GAS WELL  OTHER

7. UNIT AGREEMENT NAME  
**NATURAL BUTTES UNIT**

2. NAME OF OPERATOR  
**ENRON OIL & GAS COMPANY**

8. FARM OR LEASE NAME  
**NATURAL BUTTES UNIT**

3. ADDRESS OF OPERATOR  
**P.O. BOX 1815, VERNAL, UTAH 84078**

9. WELL NO.  
**332-8E**

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.\*  
See also space 17 below.)  
At surface  
**955' FSL & 2508' FSL SW/SE**

10. FIELD AND POOL OR WILDCAT  
**NBU/WASATCH**

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
**SEC. 8, T10S, R21E**

14. PERMIT NO.  
**43-047-32148**

15. ELEVATIONS (show whether DF, RY, GR, etc.)  
**5050'**

12. COUNTY OR PARISH  
**UINTAH**

13. STATE  
**UTAH**

16. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF   
FRACTURE TREAT   
SHOOT OR ACIDIZE   
REPAIR WELL   
(Other)

PULL OR ALTER CASING   
MULTIPLE COMPLETE   
ABANDON\*   
CHANGE PLANS   
Water Disposal Method

SUBSEQUENT REPORT OF:

WATER SHUT-OFF   
FRACTURE TREATMENT   
SHOOTING OR ACIDIZING   
(OTHER)

REPAIRING WELL   
ALTERING CASING   
ABANDONMENT\*

(NOTE: Report results of multiple completion on Well Completion of Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

*Enron Oil & Gas Company requests approval to dispose of produced water from the subject well as follows:*

1. Store in above ground tank.
2. Haul by truck to State approved disposal - Ace Oilfield Disposal, Inc.

**Accepted by the State  
of Utah Division of  
Oil, Gas and Mining  
Date: 4-2-92  
By: [Signature]**

**RECEIVED  
MAR 27 1992  
DIVISION OF  
OIL GAS & MINING**

18. I hereby certify that the foregoing is true and correct

SIGNED Luisa S. Wall

TITLE *Sr. Admin. Clerk*

DATE

*3/26/92*

APPROVED BY Federal Approval of this

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY: *Action is Necessary*

\*See Instructions on Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

# ENRON

## Oil & Gas Company

P.O. Box 250 Big Piney, Wyoming 83113 (307) 276-3331

April 14, 1992

Mr. Ed Forsman  
Bureau Of Land Management  
Vernal District  
170 South 500 East  
Vernal, Utah 84078

RE: NATURAL BUTTES UNIT 332-8E  
LEASE: U 01791  
SWSE, SEC. 8, T10S, R21E  
UINTAH COUNTY, UTAH

Dear Mr. Forsman:

Please find attached the Well Completion Report and Sundry Notice describing the completion of the subject well.

If you require additional information, please contact this office.

Very truly yours,

ENRON OIL & GAS COMPANY

  
C.C. Parsons  
District Manager

kc

cc: Utah Board of Oil, Gas and Mining  
D. Weaver  
T. Miller  
Vernal Office  
File

RECEIVED

APR 17 1992

DIVISION OF  
OIL GAS & MINING

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUBMIT IN DUPLICATE

(See other instructions on reverse side)

Form approved.  
Budget Bureau No. 42-R355.5.

5. LEASE DESIGNATION AND SERIAL NO.

U 01791

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

NATURAL BUTTES UNIT

8. FARM OR LEASE NAME

NATURAL BUTTES UNIT

9. WELL NO.

332-8E

10. FIELD AND POOL, OR WILDCAT

NATURAL BUTTES/WASATCH

11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA

SECTION 8, T10S, R21E

12. COUNTY OR PARISH

UINTAH

13. STATE

UTAH

19. ELEV. CASINGHEAD

5062' KB

23. INTERVALS DRILLED BY

ROTARY

25. WAS DIRECTIONAL SURVEY MADE

NO

27. WAS WELL CORED

NO

WELL COMPLETION OR RECOMPLETION REPORT AND LOG \*

1a. TYPE OF WELL: OIL WELL  GAS WELL  DRY  Other \_\_\_\_\_

b. TYPE OF COMPLETION: NEW WELL  WORK OVER  DEEP-EN  PLUG BACK  DIFF. RESVR.  Other \_\_\_\_\_

2. NAME OF OPERATOR  
ENRON OIL & GAS COMPANY

3. ADDRESS OF OPERATOR  
P.O. BOX 250, BIG PINEY, WYOMING 83113

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)  
At surface 955' FSL - 2508' FEL (SW/SE)  
At top prod. interval reported below SAME  
At total depth SAME

14. PERMIT NO. 43-047-32148 DATE ISSUED 11-15-92

15. DATE SPUDDED 1-14-92 16. DATE T.D. REACHED 1-22-92 17. DATE COMPL. (Ready to prod.) 3-19-92 18. ELEVATIONS (DF, REB, RT, GR, ETC.)\* 5055' NAT. GL.

20. TOTAL DEPTH, MD & TVD 6200' 21. PLUG BACK T.D., MD & TVD 6154' 22. IF MULTIPLE COMPL., HOW MANY\* ----- 23. INTERVALS DRILLED BY ROTARY

24. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TVD)\*  
5130-68' & 5582-92' WASATCH (CHAPITA WELLS)  
5805-6107' WASATCH (BUCK CANYON)

26. TYPE ELECTRIC AND OTHER LOGS RUN  
CNL, FDC, DLL, Caliper, CBL, VDL, GR & CCL 1-23-92

28. CASING RECORD (Report all strings set in well)

CASING SIZE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED
9-5/8"	32.3# H-40	218.34'	12-1/4"	125 sx Class "G" cement	NONE
4-1/2"	10.5# J-55	6166.25'	7-7/8"	175 sx Hi-Lift & 700 sx 50-50 Pozmix.	NONE

29. LINER RECORD					30. TUBING RECORD		
SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
					2-3/8"	6118.76' KB	

31. PERFORATION RECORD (Interval, size and number)				32. ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.	
INTERVAL	SIZE	NUMBER	REMARKS	DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
5130-42', 5147-51'				5805-6107'	29,000 gals Borate x-linked 2% KCl water, 96,000# 20/40 sand & 20,000# 16/30 resin coated sand.
5159-68' & 5582-92'	All .38"	w/2 SPF			(OVER)
5805-21'	.38"	w/2 SPF			
6100-07'	.38"	w/1 SPF			

33. PRODUCTION							
DATE FIRST PRODUCTION	PRODUCTION METHOD (Flowing, gas lift, pumping—size and type of pump)	WELL STATUS (Producing or shut-in)					
3-19-92	FLOWING	PRODUCING					
DATE OF TEST	HOURS TESTED	CHOKE SIZE	PROD'N. FOR TEST PERIOD	OIL—BBL.	GAS—MCF.	WATER—BBL.	GAS-OIL RATIO
4-3-92	24	19/64th	→	0 BO	358 MCFD	2 BW	
FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE	OIL—BBL.	GAS—MCF.	WATER—BBL.	OIL GRAVITY-API (CORR.)	
650 psig	800 psig	→	0 BO	358 MCFD	2 BW		

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.)  
SOLD - COLORADO INTERSTATE GAS COMPANY

TEST WITNESSED BY  
TOM HUFFORD

35. LIST OF ATTACHMENTS

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIGNED Katy Carlson TITLE REGULATORY ANALYST DATE 4-14-92

\*(See Instructions and Spaces for Additional Data on Reverse Side)



UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires September 30, 1990

**SUNDRY NOTICE AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT --" for such proposals

**SUBMIT IN TRIPLICATE**

1. Type of Well		<b>RECEIVED</b> APR 17 1992	5. Lease Designation and Serial No.
<input type="checkbox"/> Oil Well	<input checked="" type="checkbox"/> Gas Well		<input type="checkbox"/> Other
2. Name of Operator			6. If Indian, Allottee or Tribe Name
<b>ENRON OIL &amp; GAS COMPANY</b>			
3. Address and Telephone No.			7. If Unit or C.A., Agreement Designation
<b>P.O. BOX 250, BIG PINEY, WY 83113 (307) 276-3311</b>		<b>DIVISION OF OIL &amp; MINING</b>	<b>NATURAL BUTTES UNIT</b>
4. Location of Well (Footage, Sec., T., R., M., or Survey Description)			8. Well Name and No.
<b>955' FSL - 2508' FEL (SW/SE) SECTION 8, T10S, R21E</b>			<b>NATURAL BUTTES UNIT 332-8E</b>
			9. API Well No.
			<b>43-047-32148</b>
			10. Field and Pool or Exploratory Area
			<b>NATURAL BUTTES/WASATCH</b>
			11. County or Parrish, State
			<b>UINTAH, UTAH</b>

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> NOTICE OF INTENT	<input type="checkbox"/> ABANDONMENT
<input checked="" type="checkbox"/> SUBSEQUENT REPORT	<input type="checkbox"/> RECOMPLETION
<input type="checkbox"/> FINAL ABANDONMENT NOTICE	<input type="checkbox"/> PLUGGING BACK
	<input type="checkbox"/> CASING REPAIR
	<input type="checkbox"/> ALTERING CASING
	<input checked="" type="checkbox"/> OTHER <u>COMPLETION</u>
	<input type="checkbox"/> CHANGE OF PLANS
	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> NON-ROUTINE FRACTURING
	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> CONVERSION TO INJECTION

(Note: Report results of multiple completion on Well Completions or Recompletion Report and Log Form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details and give pertinent dates, including estimated date of starting any proposed work if well is directionally drilled give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work).

Enron Oil & Gas Company completed the subject well as follows:

1. Perforated intervals 5805-21' w/2 SPF and 6100-07' w/1 SPF.
2. Fracture stimulated w/29,000 gals Borate x-linked 2% KCl water, 96,000# 20/40 sand and 20,000# 16/30 resin coated sand. Flow tested.
3. Perforated interval 5582-92' w/2 SPF.
4. Set RBP @ 5200' KB.
5. Perforated intervals 5130-42', 5147-51', and 5159-68' w/2 SPF.
6. Fracture stimulated w/48,000 gals Borate x-linked 2% KCl water, 146,600# 16/30 sand and 25,750# 16/30 resin coated sand. Flow Tested.
7. Retrieved RBP and ran 2-3/8", 4.7#, J-55 production string. Landed @ 6119'.
8. Installed production facilities and placed well on production March 19, 1992.

14. I hereby certify that the foregoing is true and correct

SIGNED *Roly Carbo* TITLE Regulatory Analyst DATE 4-14-92

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY:



Routing:	
1-LCR	7-LCR
2-DTS	ZTS
3-VLC	✓
4-RJF	✓
5-RWM	✓
6-ADA	✓

Attach all documentation received by the division regarding this change.  
 Initial each listed item when completed. Write N/A if item is not-applicable.

- Change of Operator (well sold)       Designation of Agent  
 Designation of Operator       Operator Name Change Only

The operator of the well(s) listed below has changed (EFFECTIVE DATE: 3-19-92)

TO (new operator) <u>COASTAL OIL &amp; GAS CORP.</u>	FROM (former operator) <u>ENRON OIL &amp; GAS COMPANY</u>
(address) <u>P. O. BOX 749</u>	(address) <u>P. O. BOX 1815</u>
<u>DENVER, CO 80201-0749</u>	<u>VERNAL, UT 84078</u>
<u>EILEEN DANNI DEY</u>	<u>LINDA WALL</u>
phone <u>(303) 572-1121</u>	phone <u>(801) 789-0790</u>
account no. <u>N0230(X)</u>	account no. <u>N 0401</u>

Well(s) (attach additional page if needed):

Name: <u>NBU 332-8E/WSTC</u>	API: <u>43-047-32148</u>	Entity: <u>02900</u>	Sec <u>8</u> Twp <u>10S</u> Rng <u>21E</u>	Lease Type: <u>U-01791</u>
Name: _____	API: _____	Entity: _____	Sec _____ Twp _____ Rng _____	Lease Type: _____
Name: _____	API: _____	Entity: _____	Sec _____ Twp _____ Rng _____	Lease Type: _____
Name: _____	API: _____	Entity: _____	Sec _____ Twp _____ Rng _____	Lease Type: _____
Name: _____	API: _____	Entity: _____	Sec _____ Twp _____ Rng _____	Lease Type: _____
Name: _____	API: _____	Entity: _____	Sec _____ Twp _____ Rng _____	Lease Type: _____

**OPERATOR CHANGE DOCUMENTATION**

- ICF 1. (Rule R615-8-10) Sundry or other legal documentation has been received from former operator (Attach to this form). *(Rec'd 1-22-92)*
- N/A 2. (Rule R615-8-10) Sundry or other legal documentation has been received from new operator (Attach to this form). *\* Refers to Natural Buttes Unit File. (Enron desig. agent)*
- N/A 3. The Department of Commerce has been contacted if the new operator above is not currently operating any wells in Utah. Is company registered with the state? (yes/no) \_\_\_\_\_ If yes, show company file number: \_\_\_\_\_.
- N/A 4. (For Indian and Federal Wells ONLY) The BLM has been contacted regarding this change (attach Telephone Documentation Form to this report). Make note of BLM status in comments section of this form. Management review of Federal and Indian well operator changes should take place prior to completion of steps 5 through 9 below. *\* Refers to Unit File.*
- ICF 5. Changes have been entered in the Oil and Gas Information System (Wang/IBM) for each well listed above. *(5-7-92)*
- ICF 6. Cardex file has been updated for each well listed above. *(5-7-92)*
- ICF 7. Well file labels have been updated for each well listed above. *(5-7-92)*
- ICF 8. Changes have been included on the monthly "Operator, Address, and Account Changes" memo for distribution to State Lands and the Tax Commission. *(5-7-92)*
- ICF 9. A folder has been set up for the Operator Change file, and a copy of this page has been placed there for reference during routing and processing of the original documents.

ENTITY REVIEW

1. (Rule R615-8-7) Entity assignments have been reviewed for all wells listed above. Were entity changes made? (yes/no) no (If entity assignments were changed, attach copies of Form 6, Entity Action Form).

2. State Lands and the Tax Commission have been notified through normal procedures of entity changes.

BOND VERIFICATION (Fee wells only)

1. (Rule R615-3-1) The new operator of any fee lease well listed above has furnished a proper bond.

2. A copy of this form has been placed in the new and former operators' bond files.

3. The former operator has requested a release of liability from their bond (yes/no) no. Today's date 7/5/92 1992. If yes, division response was made by letter dated 7/5/92 1992.

LEASE INTEREST OWNER NOTIFICATION RESPONSIBILITY

1. (Rule R615-2-10) The former operator/lessee of any fee lease well listed above has been notified by letter dated 7/5/92 1992, of their responsibility to notify any person with an interest in such lease of the change of operator. Documentation of such notification has been requested.

2. Copies of documents have been sent to State Lands for changes involving State leases.

FILMING

1. All attachments to this form have been microfilmed. Date: May 13 1992

FILING

1. Copies of all attachments to this form have been filed in each well file.

2. The original of this form and the original attachments have been filed in the Operator Change file.

COMMENTS

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**ENRON**  
**OIL & GAS COMPANY**

P.O. BOX 1815, VERNAL, UTAH 84078 (801)789-0790

August 3, 1993

Bureau of Land Management  
Vernal District  
170 South 500 East  
Vernal, Utah 84078

RECEIVED  
AUG 26 1993  
DIVISION OF  
OIL, GAS & MINING

RE: NATURAL BUTTES UNIT 332-8E  
SEC. 8, T10S, R21E  
UINTAH COUNTY, UTAH  
LEASE NO. U-01791


Attn: Ed Forsman:

Dear Mr. Forsman:

Please find attached 3 (three) Sundry Notices requesting approval for water disposal method.

If you have any questions or need additional information, please contact this office.

Very truly yours,  
ENRON OIL & GAS COMPANY

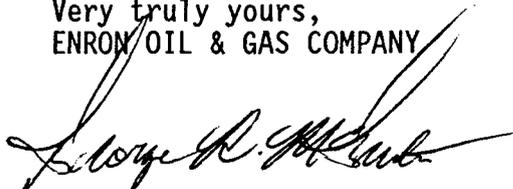

George R. McBride  
Sr. Production Foreman

cc: Division of Oil Gas & Mining  
Curt Parsons  
Doug Weaver/Toni Miller  
Diane Cross - Houston EB-2370  
File

/lwSundry

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

**SUBMIT IN TRIPLICATE**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
 ENRON OIL & GAS COMPANY

3. Address and Telephone No.  
 P.O. BOX 1815, VERNAL, UTAH 84078 (801) 789-0790

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
 955' FSL & 2508' FEL SW/SE  
 SEC. 8, T10S, R21E

5. Lease Designation and Serial No.  
 U-01791

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation  
 NATURAL BUTTES UNIT

8. Well Name and No.  
 NBU 332-8E

9. API Well No.  
 43-047-32148

10. Field and Pool, or Exploratory Area  
 NBU/WASATCH

11. County or Parish, State  
 Uintah, UTAH

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Abandonment
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Plugging Back
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Altering Casing
	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change of Plans
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Conversion to Injection
	<input checked="" type="checkbox"/> Dispose Water <small>(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)</small>

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Enron Oil & Gas Company requests approval to dispose of produced water from the subject well as follows:

1. Store in above ground tank.
2. Transport by truck to Enron Oil & Gas Company's Natural Buttes 21-20 SWD Plant.

**Accepted by the State  
of Utah Division of  
Oil, Gas and Mining**

Date: 8-30-93

By: [Signature]

14. I hereby certify that the foregoing is true and correct

Signed Linda L. Wall Title Sr. Admin. Clerk Date 8/3/93

(This space for Federal or State office use)

Approved by Federal Approval of this Title \_\_\_\_\_ Date \_\_\_\_\_  
 Conditions of approval, if distinction is Necessary

**UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT**

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires September 30, 1990

**SUNDRY NOTICE AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT --" for such proposals  
**SUBMIT IN TRIPLICATE**

<p>1. Type of Well</p> <p style="text-align: center;"> <input type="checkbox"/> Oil Well      <input checked="" type="checkbox"/> Gas Well      <input type="checkbox"/> Other         </p>	<p>5. Lease Designation and Serial No. <i>U 01791</i></p> <p>6. If Indian, Allottee or Tribe Name</p> <p>7. If Unit or C.A., Agreement Designation <i>NATURAL BUTTES UNIT</i></p> <p>8. Well Name and No. <i>NATURAL BUTTES UNIT 332-8E</i></p>
<p>2. Name of Operator <i>ENRON OIL &amp; GAS COMPANY</i></p>	<p>9. API Well No. <i>43-047-32148</i></p>
<p>3. Address and Telephone No. <i>P.O. BOX 250, BIG PINEY, WY 83113 (307) 276-3331</i></p>	<p>10. Field and Pool or Exploratory Area <i>NATURAL BUTTES/WASATCH</i></p>
<p>4. Location of Well (Footage, Sec., T., R., M., or Survey Description) <i>955' FSL - 2508' FEL (SW/SE) SECTION 8, T10S, R21E</i></p>	<p>11. COUNTY STATE <i>UINTAH, UTAH</i></p>


12. CHECK APPROPRIATE BOX(es) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> NOTICE OF INTENT	<input type="checkbox"/> ABANDONMENT
<input type="checkbox"/> SUBSEQUENT REPORT	<input type="checkbox"/> RECOMPLETION
<input type="checkbox"/> FINAL ABANDONMENT NOTICE	<input type="checkbox"/> PLUGGING BACK
	<input type="checkbox"/> CASING REPAIR
	<input type="checkbox"/> ALTERING CASING
	<input type="checkbox"/> OTHER
	<input type="checkbox"/> CHANGE OF PLANS
	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> NON-ROUTINE FRACTURING
	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> CONVERSION TO INJECTION

(Note: Report results of multiple completion on Well Completions or Recompletion Report and Log Form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details and give pertinent dates, including estimated date of starting any proposed work if well is directionally drilled give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work).

Enron Oil & Gas Company is requesting authorization for a reduction in the frequency of meter calibration from quarterly to semi-annually at the subject location. The well is currently producing approximately 75 MCFD. The reduction in frequency of calibration is not expected to adversely impact measurement accuracy but should be helpful in improving the man power efficiency of both Enron as operator and CIG as gas gatherer.



**\*NOTE: Enron will be using Nationwide Bond #NM 2308**

14. I hereby certify that the foregoing is true and correct

SIGNED *Raty Carls* TITLE *Regulatory Analyst* DATE *4-15-97*

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY:

STATE OF UTAH  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

5. LEASE DESIGNATION AND SERIAL NUMBER:  
6. IF INDIAN, ALLOTTEE OR TRIBE NAME:  
7. UNIT or CA AGREEMENT NAME:  
8. WELL NAME and NUMBER:  
Exhibit "A"  
9. API NUMBER:  
10. FIELD AND POOL, OR WILDCAT:

1. TYPE OF WELL  
OIL WELL  GAS WELL  OTHER \_\_\_\_\_  
2. NAME OF OPERATOR:  
El Paso Production Oil & Gas Company  
3. ADDRESS OF OPERATOR:  
8 South 1200 East CITY Vernal STATE Utah ZIP 84078 PHONE NUMBER:  
435-789-4433

4. LOCATION OF WELL  
FOOTAGES AT SURFACE: \_\_\_\_\_ COUNTY: \_\_\_\_\_  
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: \_\_\_\_\_ STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>Name Change</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.  
As a result of the merger between The Coastal Corporation and a wholly owned subsidiary of El Paso Energy Corporation, the name of Coastal Oil & Gas Corporation has been changed to El Paso Production Oil & Gas Company effective March 9, 2001.  
See Exhibit "A"

Bond # 400JU0708

Coastal Oil & Gas Corporation  
NAME (PLEASE PRINT) John T. Elzner TITLE Vice President  
SIGNATURE [Signature] DATE 06-15-01  
El Paso Production Oil & Gas Company  
NAME (PLEASE PRINT) John T. Elzner TITLE Vice President  
SIGNATURE [Signature] DATE 06-15-01

(This space for State use only)

RECEIVED

JUN 19 2001

DIVISION OF  
OIL, GAS AND MINING

State of Delaware  
Office of the Secretary of State

---

PAGE 1

I, HARRIET SMITH WINDSOR, SECRETARY OF STATE OF THE STATE OF DELAWARE, DO HEREBY CERTIFY THE ATTACHED IS A TRUE AND CORRECT COPY OF THE CERTIFICATE OF AMENDMENT OF "COASTAL OIL & GAS CORPORATION", CHANGING ITS NAME FROM "COASTAL OIL & GAS CORPORATION" TO "EL PASO PRODUCTION OIL & GAS COMPANY", FILED IN THIS OFFICE ON THE NINTH DAY OF MARCH, A.D. 2001, AT 11 O'CLOCK A.M.

RECEIVED

JUN 14 2001

DIVISION OF  
OIL, GAS AND MINING



*Harriet Smith Windsor*  
Harriet Smith Windsor, Secretary of State

0610204 8100

AUTHENTICATION: 1061007

010162788

DATE: 04-03-01

CERTIFICATE OF AMENDMENT

OF

CERTIFICATE OF INCORPORATION

COASTAL OIL & GAS CORPORATION (the "Company"), a corporation organized and existing under and by virtue of the General Corporation Law of the State of Delaware, DOES HEREBY CERTIFY:

FIRST: That the Board of Directors of the Company, by the unanimous written consent of its members, filed with the minutes of the Board, adopted a resolution proposing and declaring advisable the following amendment to the Certificate of Incorporation of the Company:

RESOLVED that it is deemed advisable that the Certificate of Incorporation of this Company be amended, and that said Certificate of Incorporation be so amended, by changing the Article thereof numbered "FIRST." so that, as amended, said Article shall be and read as follows:

"FIRST. The name of the corporation is El Paso Production Oil & Gas Company."

SECOND: That in lieu of a meeting and vote of stockholders, the stockholders entitled to vote have given unanimous written consent to said amendment in accordance with the provisions of Section 228 of the General Corporation Law of the State of Delaware.

THIRD: That the aforesaid amendment was duly adopted in accordance with the applicable provisions of Sections 242 and 228 of the General Corporation Law of the State of Delaware.

IN WITNESS WHEREOF, said COASTAL OIL & GAS CORPORATION has caused this certificate to be signed on its behalf by a Vice President and attested by an Assistant Secretary, this 9th day of March 2001.

COASTAL OIL & GAS CORPORATION

David L. Siddall
Vice President

Attest:

Margaret E. Roark, Assistant Secretary

RECEIVED

STATE OF DELAWARE
SECRETARY OF STATE
DIVISION OF CORPORATIONS
FILED 11:00 AM 03/09/2001
010118394 - 0610204

JUN 19 2001

DIVISION OF
OIL, GAS AND MINING



# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155

**RECEIVED**

JUL 12 2001

DIVISION OF  
OIL, GAS AND MINING

In Reply Refer To:  
3106  
UTSL-065841  
(UT-924)

JUL 10 2001

### NOTICE

El Paso Production Oil & Gas Company : Oil and Gas  
Nine Greenway Plaza :  
Houston TX 77046-0095 :

#### Name Change Recognized


Acceptable evidence has been received in this office concerning the name change of Coastal Oil & Gas Corporation into El Paso Production Oil & Gas Company with El Paso Production Oil & Gas Company being the surviving entity.

For our purposes, the name change is recognized effective March 9, 2001.

The oil and gas lease files identified on the enclosed exhibit have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Coastal Oil & Gas Corporation to El Paso Production Oil & Gas Company. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Wyoming and Colorado.



Opolonia L. Abeyta  
Acting Chief, Branch of  
Minerals Adjudication

Enclosure

1. Exhibit of Leases (1 pp)

cc: Moab Field Office  
Vernal Field Office  
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217  
~~State of Utah, DOGM~~, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114  
Teresa Thompson (UT-922)  
Joe Incardine (UT-921)

## Exhibit of Leases

UTUSL-065841A	UTU-47172	UTU-74415	UTU-53860
UTU-28652	UTU-50687	UTU-74416	UTU-66401
UTU-37943	UTU-52298	UTU-75091	UTU-67868
UTU-44089	UTU-0109054	UTU-75096	UTU-65389
UTU-44090A	UTU-0143511	UTU-75097	UTU-77084
UTU-61263	UTU-0143512	UTU-75673	UTU-61430
UTU-00343	UTU-38401	UTU-76259	UTU-72633
UTU-02651	UTU-38411	UTU-76260	UTU-72650
UTU-02651B	UTU-38418	UTU-76261	UTU-49692
UTU-0142175	UTU-38419	UTU-76493	UTU-57894
UTU-70235	UTU-38420	UTU-76495	UTU-76829
UTU-70406	UTU-38421	UTU-76503	UTU-76830
UTU-74954	UTU-38423	UTU-78228	UTU-76831
UTU-75132	UTU-38424	UTU-78714	
UTU-75699	UTU-38425	UTU-78727	
UTU-76242	UTU-38426	UTU-78734	
UTU-78032	UTU-38427	UTU-79012	
UTU-4377	UTU-38428	UTU-79011	
UTU-4378	UTU-53861	UTU-71694	
UTU-7386	UTU-58097	UTU-00576	
UTU-8344A	UTU-64376	UTU-00647	
UTU-8345	UTU-65222	UTU-01470D	
UTU-8347	UTU-65223	UTU-0136484	
UTU-8621	UTU-66746	UTU-8344	
UTU-14646	UTU-67178	UTU-8346	
UTU-15855	UTU-67549	UTU-8648	
UTU-25880	UTU-72028	UTU-28212	
UTU-28213	UTU-72632	UTU-30289	
UTU-29535	UTU-73009	UTU-31260	
UTU-29797	UTU-73010	UTU-33433	
UTU-31736	UTU-73013	UTU-34711	
UTU-34350	UTU-73175	UTU-46699	
UTU-34705	UTU-73434	UTU-78852	
UTU-37116	UTU-73435	UTU-78853	
UTU-37355	UTU-73444	UTU-78854	
UTU-37573	UTU-73450	UTU-075939	
UTU-38261	UTU-73900	UTU-0149767	
UTU-39223	UTU-74409	UTU-2078	
UTU-40729	UTU-74410	UTU-44426	
UTU-40736	UTU-74413	UTU-49530	
UTU-42469	UTU-74414	UTU-51026	

**OPERATOR CHANGE WORKSHEET**

**ROUTING**

1. GLH /		4-KAS /
2. CDW /		5-LP /
3. JLT		6-FILE

Enter date after each listed item is completed

Change of Operator (Well Sold)

Designation of Agent

Operator Name Change (Only)

**X** Merger

The operator of the well(s) listed below has changed, effective: **3-09-2001**

<b>FROM: (Old Operator):</b>
COASTAL OIL & GAS CORPORATION
Address: 9 GREENWAY PLAZA STE 2721
HOUSTON, TX 77046-0995
Phone: 1-(713)-418-4635
Account N0230

<b>TO: ( New Operator):</b>
EL PASO PRODUCTION OIL & GAS COMPANY
Address: 9 GREENWAY PLAZA STE 2721 RM 2975B
HOUSTON, TX 77046-0995
Phone: 1-(832)-676-4721
Account N1845

**CA No.**

**Unit: NATURAL BUTTES**

**WELL(S)**

NAME	API NO	ENTITY NO	SEC TWN RNG	LEASE TYPE	WELL TYPE	WELL STATUS
CIGE 137-6-10-21	43-047-31988	2900	06-10S-21E	FEDERAL	GW	P
307-6E	43-047-32014	2900	06-10S-21E	FEDERAL	GW	P
CIGE 138A-6-10-21	43-047-32049	2900	06-10S-21E	FEDERAL	GW	P
CIGE 159-6-10-21	43-047-32120	2900	06-10S-21E	FEDERAL	GW	P
NBU 1-7B	43-047-30261	2900	07-10S-21E	FEDERAL	GW	P
NBU CIGE 13-7-10-21	43-047-30420	2900	07-10S-21E	FEDERAL	GW	P
NBU CIGE 94D-7-10-21J	43-047-31164	2900	07-10S-21E	FEDERAL	GW	P
CIGE 167-7-10-21	43-047-32142	2900	07-10S-21E	FEDERAL	GW	S
CIGE 182-7-10-21	43-047-32481	2900	07-10S-21E	FEDERAL	GW	P
NBU 13-8B	43-047-30294	2900	08-10S-21E	FEDERAL	GW	P
CIGE 7-8-10-21	43-047-30358	2900	08-10S-21E	FEDERAL	GW	P
NBU CIGE 75D-8-10-21P	43-047-30954	2900	08-10S-21E	FEDERAL	GW	P
FEDERAL 205-8	43-047-31238	2900	08-10S-21E	FEDERAL	GW	P
CIGE 102D-8-10-21	43-047-31741	2900	08-10S-21E	FEDERAL	GW	P
CIGE 149-8-10-21	43-047-32056	2900	08-10S-21E	FEDERAL	GW	P
NBU 332-8E	43-047-32148	2900	08-10S-21E	FEDERAL	GW	P
CIGE 207-8-10-21	43-047-32975	2900	08-10S-21E	FEDERAL	GW	P
CIGE 208-8-10-21	43-047-32997	2900	08-10S-21E	FEDERAL	GW	P
NBU 508-8E	43-047-33124	2900	08-10S-21E	FEDERAL	GW	P
NBU 7-9B	43-047-30278	2900	09-10S-21E	FEDERAL	GW	P

**OPERATOR CHANGES DOCUMENTATION**

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 06/19/2001
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 06/19/2001
- The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 06/21/2001
- Is the new operator registered in the State of Utah: YES Business Number: 608186-0143

5. If **NO**, the operator was contacted on: N/A
6. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the (merger, name change, or operator change for all wells listed on Federal or Indian leases on: 07/10/2001
7. **Federal and Indian Units:** The BLM or BIA has approved the successor of unit operator for wells listed on: 07/10/2001
8. **Federal and Indian Communitization Agreements ("CA"):** The BLM or the BIA has approved the operator change for all wells listed involved in a CA on: 07/10/2001
9. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

---

**DATA ENTRY:**

1. Changes entered in the **Oil and Gas Database** on: 08/06/2001
2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 08/06/2001
3. Bond information entered in RBDMS on: N/A
4. Fee wells attached to bond in RBDMS on: N/A

---

**STATE BOND VERIFICATION:**

1. State well(s) covered by Bond No.: N/A

---

**FEDERAL BOND VERIFICATION:**

1. Federal well(s) covered by Bond No.: WY 2793

---

**FEE WELLS - BOND VERIFICATION/LEASE INTEREST OWNER NOTIFICATION:**

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond No: N/A
2. The **FORMER** operator has requested a release of liability from their bond on: N/A  
The Division sent response by letter on: N/A
3. (R649-2-10) The **FORMER** operator of the Fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: \_\_\_\_\_

---

**FILMING:**

1. All attachments to this form have been **MICROFILMED** on: \_\_\_\_\_

---

**FILING:**

1. **ORIGINALS/COPIES** of all attachments pertaining to each individual well have been filed in each well file on: \_\_\_\_\_

---

**COMMENTS: Master list of all wells involved in operator change from Coastal Oil & Gas Corporation to El Paso Production Oil and Gas Company shall be retained in the "Operator Change File".**

---

---

---

---

---

JAN. 17. 2003 3:34PM

WESTPORT

NO. 173 P. 2

**WESTPORT OIL AND GAS COMPANY, L.P.**

410 Seventeenth Street #2300 Denver Colorado 80202-4436  
Telephone: 303 573 5404 Fax: 303 573 5609

February 1, 2002

Department of the Interior  
Bureau of Land Management  
2850 Youngfield Street  
Lakewood, CO 80215-7093  
Attention: Ms. Martha Maxwell

RE: BLM Bond CO-1203  
BLM Nationwide Bond 158626364  
Surety - Continental Casualty Company  
Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.  
Conversion of Westport Oil and Gas Company, Inc., into Westport Oil and Gas Company, L.P.  
Assumption Rider - Westport Oil and Gas Company, L.P.

Dear Ms. Maxwell:

Pursuant to our recent conversations, please find the following list of enclosures for the BLM's consideration and approval:

Two (2) Assumption Riders, fully executed originals.  
Copies of Belco Energy Corporation merger into Westport Oil and Gas Company, Inc.  
Copies of Westport Oil and Gas Company, Inc., conversion into Westport Oil and Gas Company, L.P.  
List of all Federal/BIA/State Leases - Belco/Westport's leases - in all states.

Please inform us of any additional information needed to complete the change to Westport Oil and Gas Company, L.P., as operator of record.

I thank you for your assistance and cooperation in this matter. Please do not hesitate contacting the undersigned, should a question arise.

Sincerely,  
Westport Oil and Gas Company, L.P.

Debby J. Black  
Engineer Technician

Encl:



United States Department of the Interior **RECEIVED**

BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155

FEB 22 2002

DIVISION OF  
OIL, GAS AND MINING

In Reply Refer To:  
3106  
UTU-25566 et al  
(UT-924)

FEB 21 2002

NOTICE

Westport Oil and Gas Company L.P. : Oil and Gas  
410 Seventeenth Street, #2300 :  
Denver Colorado 80215-7093 :

Name Change Recognized

Acceptable evidence has been received in this office concerning the name change of Westport Oil and Gas Company, Inc. into Westport Oil and Gas Company, L.P. with Westport Oil and Gas Company, L.P. being the surviving entity.


For our purposes, the name change is recognized effective December 31, 2001.

The oil and gas lease files identified have been noted as to the name change. The exhibit was compiled from a list of leases obtained from our computer program. We have not abstracted the lease files to determine if the entities affected by this name change hold an interest in the leases identified nor have we attempted to identify leases where the entities are the operator on the ground maintaining no vested recorded title or operating rights interests. We will be notifying the Minerals Management Service and all applicable Bureau of Land Management offices of the change by a copy of this notice. If additional documentation for changes of operator are required by our Field Offices, you will be contacted by them.

If you identify additional leases in which the entities maintain an interest, please contact this office and we will appropriately document those files with a copy of this Notice.

Due to the name change, the name of the principal/obligor on the bond is required to be changed from Westport Oil and Gas Company, Inc. to Westport Oil and Gas Company, L.P.. You may accomplish this either by consent of surety rider on the original bond or a rider to the original bond. The bonds are held in Colorado.

UTU-03405  
UTU-20895  
UTU-25566  
UTU-43156  
UTU-49518  
UTU-49519  
UTU-49522  
UTU-49523



Robert Lopez  
Chief, Branch of  
Minerals Adjudication

cc: Moab Field Office  
Vernal Field Office  
MMS, Reference Data Branch, MS3130, PO Box 5860, Denver CO 80217  
State of Utah, DOGM, Attn: Jim Thompson (Ste. 1210), Box 145801, SLC UT 84114  
Teresa Thompson (UT-922)  
Joe Incardine (UT-921)

# memorandum

Branch of Real Estate Services  
Uintah & Ouray Agency

Date: 5 December, 2002

Reply to  
Attn of: Supervisory Petroleum Engineer

Subject: Modification of Utah Division of Oil, Gas and Mining Regulations

To: Director, Utah Division of Oil, Gas and Mining Division: John Baza

We have been advised of changes occurring with the operation of your database for Change of Operator. You will be modifying your records to reflect Change of Operator once you have received all necessary documentation from the companies involved, and perhaps in advance of our Notice of Concurrence/Approval of Change of Operator where Indian leases are involved.

We have no objection.

With further comment to Rulemaking, I wish to comment concerning the provision of Exhibits for upcoming Hearings. I would like to see the Uintah & Ouray Agency, BIA, and the Ute Indian Tribe, Energy & Mineral Resources Department added to the list of those parties that receive advance Exhibits so as to allow us to have research time prior to Hearing dates. We will be able to provide a more informed recommendation to the Oil, Gas and Mining Board. It would be best if we would receive only those Exhibits that concern Indian lands, specifically on or adjacent to Indian lands. This may be a difficult situation to attain, as it is not always clear where 'on or adjacent' occurs.

I am aware that you have gone to extra effort to correct this matter already, and I fully appreciate it. My request is intended only to allow the addition of Uintah & Ouray Agency and Ute Indian Tribe to the official listing.

We appreciate your concern, and hope that these comments are timely enough for consideration in the revision process.



CC: Minerals & Mining Section of RES  
Ute Energy & Mineral Resources Department: Executive Director  
chronos



# United States Department of the Interior

BUREAU OF INDIAN AFFAIRS

Washington, D.C. 20240

FEB 10 2003

IN REPLY REFER TO:

Real Estate Services

Carroll A. Wilson  
Principal Landman  
Westport Oil and Gas Company, L.P.  
1368 South 1200 East  
Vernal, Utah 84078

Dear Mr. Wilson:

This is in response to your request for approval of RLI Insurance Company's Nationwide Oil and Gas Lease Bond No. RLB0005239 executed effective December 17, 2002, (\$150,000 coverage) with Westport Oil and Gas Company, L. P., as principal.

This bond is hereby approved as of the date of this correspondence and will be retained in the Bureau of Indian Affairs' Division of Real Estate Services, 1849 C Street, NW, MS-4512-MIB, Washington, D.C. 20240. All Bureau oil and gas regional offices and the surety are being informed of this action.

In cases where you have existing individual and/or collective bonds on file with one or more of our regional offices, you may now request those offices, directly, to terminate in lieu of coverage under this Nationwide Bond.

Enclosed is a copy of the approved bond for your files. If we may be of further assistance in this matter, please advise.

Sincerely,

Director, Office of Trust Responsibilities

ACTING

Enclosure



# United States Department of the Interior

## BUREAU OF LAND MANAGEMENT

Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155

IN REPLY REFER TO  
UT-922

February 27, 2003

Westport Oil and Gas Company, L.P.  
Attn: Gary D. Williamson  
1670 Broadway, Suite 2800  
Denver, Colorado 80202

Re: Natural Buttes Unit  
Uintah County, Utah

Gentlemen:

On February 27, 2003, we received an indenture dated December 17, 2002, whereby El Paso Production Oil & Gas Company resigned as Unit Operator and Westport Oil and Gas Company, L.P., was designated as Successor Unit Operator for the Natural Buttes Unit, Uintah County, Utah.

This indenture was executed by all required parties and the signatory parties have complied with Sections 5 and 6 of the unit agreement. The instrument is hereby approved effective February 27, 2003. In approving this designation, the Authorized Officer neither warrants nor certifies that the designated party has obtained all required approval that would entitle it to conduct operations under the Natural Buttes Unit Agreement.

Your nationwide (Colorado) oil and gas bond No. 1203 will be used to cover all operations within the Natural Buttes Unit.

It is requested that you notify all interested parties of the change in unit operator. Copies of the approved instruments are being distributed to the appropriate federal offices, with one copy returned herewith.

Sincerely,

/s/ Robert A. Henricks

Robert A. Henricks  
Chief, Branch of Fluid Minerals

Enclosure

bcc: Field Manager - Vernal (w/enclosure)  
SITLA  
Division of Oil, Gas & Mining  
Minerals Adjudication Group  
File - Natural Buttes Unit (w/enclosure)  
Agr. Sec. Chron  
Fluid Chron

UT922:TAThompson:tt:02/27/2003

RECEIVED

FEB 28 2003

DIV. OF OIL, GAS & MINING

**STATE OF UTAH**  
DEPARTMENT OF NATURAL RESOURCES  
DIVISION OF OIL, GAS AND MINING

FORM 9

<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>		5. LEASE DESIGNATION AND SERIAL NUMBER:
Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME:
2. NAME OF OPERATOR: El Paso Production Oil & Gas Company		8. WELL NAME and NUMBER: Exhibit "A"
3. ADDRESS OF OPERATOR: 9 Greenway Plaza      CITY: Houston      STATE: TX      ZIP: 77064-0995		9. API NUMBER:
PHONE NUMBER: (832) 676-5933		10. FIELD AND POOL, OR WILDCAT:
4. LOCATION OF WELL FOOTAGES AT SURFACE:		COUNTY:
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:		STATE: <b>UTAH</b>


11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input checked="" type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> OTHER: _____
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.


Operator change to Westport Oil and Gas Company, L.P., 1670 Broadway, Suite 2800, Denver, CO. 80202-4800, effective December 17, 2002.

BOND # \_\_\_\_\_  
State Surety Bond No. RLB0005236  
Fee Bond No. RLB0005238

EL PASO PRODUCTION OIL & GAS COMPANY

By:   
Jon R. Nelsen, Attorney-in-Fact

**RECEIVED**  
**FEB 28 2003**  
DIV. OF OIL, GAS & MINING

NAME (PLEASE PRINT) <u>WESTPORT OIL AND GAS COMPANY, L.P.</u> <u>David R. Dix</u>	TITLE <u>Agent and Attorney-in-Fact</u>
SIGNATURE 	DATE <u>12/17/02</u>

(This space for State use only)

Form 3160-5  
(August 1999)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS  
Do not use this form for proposals to drill or reenter an  
abandoned well. Use Form 3160-3 (APD) for such proposals.

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

5. Lease Serial No.  
**SEE ATTACHED EXHIBIT "A"**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.  
**SEE ATTACHED EXHIBIT "A"**

9. API Well No.  
**SEE ATTACHED EXHIBIT "A"**

10. Field and Pool, or Exploratory Area

11. County or Parish, State  
**UINTAH COUNTY, UT**

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
**WESTPORT OIL & GAS COMPANY, L.P.**

3a. Address  
**P.O. BOX 1148 VERNAL, UT 84078**

3b. Phone No. (include area code)  
**(435) 781-7023**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

**SEE ATTACHED EXHIBIT "A"**

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Deepen
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Alter Casing
	<input type="checkbox"/> Fracture Treat
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Change Plans
	<input type="checkbox"/> Plug and Abandon
	<input type="checkbox"/> Convert to Injection
	<input type="checkbox"/> Plug Back
	<input type="checkbox"/> Production (Start/Resume)
	<input type="checkbox"/> Reclamation
	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Water Disposal
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Well Integrity
	<input checked="" type="checkbox"/> Other

**SUCCESSOR OF  
OPERATOR**

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zone. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed if testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator determined that the site is ready for final inspection.

WESTPORT OIL & GAS COMPANY, L.P., IS CONSIDERED TO BE THE OPERATOR ON THE ATTACHED DESCRIBED LANDS AND IS RESPONSIBLE UNDER THE TERMS AND CONDITIONS OF THE LEASE FOR THE OPERATIONS CONDUCTED ON THE LEASED LANDS OR PORTIONS THEREOF, BOND COVERAGE FOR THIS WELL IS PROVIDED BY FEDERAL NATIONWIDE BOND NO. 158626364, EFFECTIVE FEBRUARY 1, 2002, AND BIA NATIONWIDE BOND NO. RLB0005239, EFFECTIVE FEBRUARY 10, 2003.

RECEIVED  
MAR 04 2003

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

**CHERYL CAMERON**

Title

**OPERATIONS**

Signature

Date

**March 4, 2003**

DIV. OF OIL, GAS & MINING

**THIS SPACE FOR FEDERAL OR STATE USE**

Approved by

Title

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

**OPERATOR CHANGE WORKSHEET**

**ROUTING**

1. GLH
2. CDW ✓
3. FILE

**X Change of Operator (Well Sold)**

Designation of Agent/Operator

Operator Name Change

Merger

The operator of the well(s) listed below has changed, effective: **12-17-02**

<b>FROM: (Old Operator):</b>	<b>TO: (New Operator):</b>
EL PASO PRODUCTION OIL & GAS COMPANY	WESTPORT OIL & GAS COMPANY LP
Address: 9 GREENWAY PLAZA	Address: P O BOX 1148
HOUSTON, TX 77064-0995	VERNAL, UT 84078
Phone: 1-(832)-676-5933	Phone: 1-(435)-781-7023
Account No. N1845	Account No. N2115

**CA No. Unit: NATURAL BUTTES**

WELL(S)	SEC TWN RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS
NBU 1-7B	07-10S-21E	43-047-30261	2900	FEDERAL	GW	P
NBU CIGE 13-7-10-21	07-10S-21E	43-047-30420	2900	FEDERAL	GW	P
NBU CIGE 94D-7-10-21J	07-10S-21E	43-047-31164	2900	FEDERAL	GW	P
CIGE 167-7-10-21	07-10S-21E	43-047-32142	2900	FEDERAL	GW	S
CIGE 182-7-10-21	07-10S-21E	43-047-32481	2900	FEDERAL	GW	P
CIGE 200-7	07-10S-21E	43-047-31139	2900	FEDERAL	GW	PA
NBU 13-8B	08-10S-21E	43-047-30294	2900	FEDERAL	GW	P
CIGE 7-8-10-21	08-10S-21E	43-047-30358	2900	FEDERAL	GW	P
NBU CIGE 75D-8-10-21P	08-10S-21E	43-047-30954	2900	FEDERAL	GW	P
NBU FEDERAL 205-8J	08-10S-21E	43-047-31238	2900	FEDERAL	GW	P
CIGE 102D-8-10-21	08-10S-21E	43-047-31741	2900	FEDERAL	GW	S
NBU 332-8E	08-10S-21E	43-047-32148	2900	FEDERAL	GW	S
CIGE 149-8-10-21	08-10S-21E	43-047-32056	2900	FEDERAL	GW	P
CIGE 207-8-10-21	08-10S-21E	43-047-32975	2900	FEDERAL	GW	P
CIGE 208-8-10-21	08-10S-21E	43-047-32995	2900	FEDERAL	GW	P
NBU 508-8E	08-10S-21E	43-047-33124	2900	FEDERAL	GW	P
CIGE 227-9-10-21	09-10S-21E	43-047-32998	2900	FEDERAL	GW	P
NBU 431-9E	09-10S-21E	43-047-33069	2900	FEDERAL	GW	S
CIGE 254	09-10S-21E	43-047-33723	2900	FEDERAL	GW	P
CIGE 150-9-10-21	09-10S-21E	43-047-32058	2900	FEDERAL	GW	P

**OPERATOR CHANGES DOCUMENTATION**

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 02/28/2003
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 03/04/2003
- The new company has been checked through the **Department of Commerce, Division of Corporations Database** on: 03/06/2003
- Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- If **NO**, the operator was contacted on: \_\_\_\_\_

6. (R649-9-2)Waste Management Plan has been received on: IN PLACE

7. **Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM-12/31/2003 BIA-12/5/02

8. **Federal and Indian Units:**

The BLM or BIA has approved the successor of unit operator for wells listed on: 02/27/2003

9. **Federal and Indian Communization Agreements ("CA"):**

The BLM or BIA has approved the operator for all wells listed within a CA on: N/A

10. **Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on: N/A

**DATA ENTRY:**

1. Changes entered in the **Oil and Gas Database** on: 03/19/2003

2. Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 03/19/2003

3. Bond information entered in RBDMS on: N/A

4. Fee wells attached to bond in RBDMS on: N/A

**STATE WELL(S) BOND VERIFICATION:**

1. State well(s) covered by Bond Number: RLB 0005236

**FEDERAL WELL(S) BOND VERIFICATION:**

1. Federal well(s) covered by Bond Number: 158626364

**INDIAN WELL(S) BOND VERIFICATION:**

1. Indian well(s) covered by Bond Number: RLB 0005239

**FEE WELL(S) BOND VERIFICATION:**

1. (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB 0005238

2. The **FORMER** operator has requested a release of liability from their bond on: N/A

The Division sent response by letter on: N/A

**LEASE INTEREST OWNER NOTIFICATION:**

3. (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: N/A

**COMMENTS:**

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Division of Oil, Gas and Mining  
**OPERATOR CHANGE WORKSHEET**

<b>ROUTING</b>
1. DJJ
2. CDW

**X Change of Operator (Well Sold)**

Operator Name Change/Merger

The operator of the well(s) listed below has changed, effective:		<b>1/6/2006</b>
<b>FROM:</b> (Old Operator): N2115-Westport Oil & Gas Co., LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024	<b>TO:</b> ( New Operator): N2995-Kerr-McGee Oil & Gas Onshore, LP 1368 South 1200 East Vernal, UT 84078 Phone: 1-(435) 781-7024	

WELL NAME	CA No.	Unit:	NATURAL BUTTES UNIT					
	SEC	TWN	RNG	API NO	ENTITY NO	LEASE TYPE	WELL TYPE	WELL STATUS

**OPERATOR CHANGES DOCUMENTATION**

Enter date after each listed item is completed

- (R649-8-10) Sundry or legal documentation was received from the **FORMER** operator on: 5/10/2006
- (R649-8-10) Sundry or legal documentation was received from the **NEW** operator on: 5/10/2006
- The new company was checked on the **Department of Commerce, Division of Corporations Database** on: 3/7/2006
- a. Is the new operator registered in the State of Utah: YES Business Number: 1355743-0181
- b. If **NO**, the operator was contacted on:
- 5a. (R649-9-2)Waste Management Plan has been received on: IN PLACE
- 5b. Inspections of LA PA state/fee well sites complete on: n/a 3 LA wells & all PA wells transferred
- 5c. Reports current for Production/Disposition & Sundries on: ok
- 6. Federal and Indian Lease Wells:** The BLM and or the BIA has approved the merger, name change, or operator change for all wells listed on Federal or Indian leases on: BLM 3/27/2006 BIA not yet
- 7. Federal and Indian Units:**  
The BLM or BIA has approved the successor of unit operator for wells listed on: 3/27/2006
- 8. Federal and Indian Communization Agreements ("CA"):**  
The BLM or BIA has approved the operator for all wells listed within a CA on: n/a
- 9. Underground Injection Control ("UIC")** The Division has approved UIC Form 5, **Transfer of Authority to Inject**, for the enhanced/secondary recovery unit/project for the water disposal well(s) listed on:

**DATA ENTRY:**

- Changes entered in the **Oil and Gas Database** on: 5/15/2006
- Changes have been entered on the **Monthly Operator Change Spread Sheet** on: 5/15/2006
- Bond information entered in RBDMS on: 5/15/2006
- Fee/State wells attached to bond in RBDMS on: 5/16/2006
- Injection Projects to new operator in RBDMS on: \_\_\_\_\_
- Receipt of Acceptance of Drilling Procedures for APD/New on: n/a Name Change Only

**BOND VERIFICATION:**

- Federal well(s) covered by Bond Number: CO1203
- Indian well(s) covered by Bond Number: RLB0005239
- (R649-3-1) The **NEW** operator of any fee well(s) listed covered by Bond Number RLB0005236
- a. The **FORMER** operator has requested a release of liability from their bond on: n/a rider added KMG  
The Division sent response by letter on: \_\_\_\_\_

**LEASE INTEREST OWNER NOTIFICATION:**

- (R649-2-10) The **FORMER** operator of the fee wells has been contacted and informed by a letter from the Division of their responsibility to notify all interest owners of this change on: 5/16/2006

**COMMENTS:**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**

*Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
**KERR-McGEE OIL & GAS ONSHORE LP**

3a. Address  
**1368 SOUTH 1200 EAST VERNAL, UT 84078**

3b. Phone No. (include area code)  
**(435) 781-7024**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**SEE ATTACHED**

5. Lease Serial No.  
**MULTIPLE LEASES**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.  
**MUTIPLE WELLS**

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State  
**UINTAH COUNTY, UTAH**

**12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <b>CHANGE OF OPERATOR</b>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

PLEASE BE ADVISED THAT KERR-McGEE OIL & GAS ONSHORE LP, IS CONSIDERED TO BE THE OPERATOR OF THE ATTACHED WELL LOCATIONS. EFFECTIVE JANUARY 6, 2006. KERR-McGEE OIL & GAS ONSHORE LP, IS RESPONSIBLE UNDER TERMS AND CONDITIONS OF THE LEASE(S) FOR THE OPERATIONS CONDUCTED UPON LEASE LANDS. BOND COVERAGE IS PROVIDED BY STATE OF UTAH NATIONWIDE BOND NO. RLB0005237.

**RECEIVED**

**MAY 10 2006**

DIV. OF OIL, GAS & MINING

*BLM BOND = C01203  
BIA BOND = RLB0005239*

**APPROVED 5/16/06**

*Earlene Russell*  
**Division of Oil, Gas and Mining  
Earlene Russell, Engineering Technician**

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) <b>RANDY BAYNE</b>	Title <b>DRILLING MANAGER</b>
Signature <i>Randy Bayne</i>	Date <b>May 9, 2006</b>

**THIS SPACE FOR FEDERAL OR STATE USE**

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0135  
Expires November 30, 2000

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

**SUBMIT IN TRIPLICATE - Other instructions on reverse side**

1. Type of Well  
 Oil Well  Gas Well  Other

2. Name of Operator  
**WESTPORT OIL & GAS COMPANY L.P.**

3a. Address  
**1368 SOUTH 1200 EAST VERNAL, UT 84078**

3b. Phone No. (include area code)  
**(435) 781-7024**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**SEE ATTACHED**

5. Lease Serial No.  
**MULTIPLE LEASES**

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.  
**MUTIPLE WELLS**

9. API Well No.

10. Field and Pool, or Exploratory Area

11. County or Parish, State  
**UINTAH COUNTY, UTAH**

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal
			<input type="checkbox"/> Water Shut-Off
			<input type="checkbox"/> Well Integrity
			<input checked="" type="checkbox"/> Other <b>CHANGE OF OPERATOR</b>

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

EFFECTIVE JANUARY 6, 2006, WESTPORT OIL & GAS COMPANY L.P., HAS RELINQUISHED THE OPERATORSHIP OF THE ATTACHED WELL LOCATIONS TO KERR-McGEE OIL & GAS ONSHORE LP.

**APPROVED** 5/16/06  
*Earlene Russell*  
 Division of Oil, Gas and Mining  
 Earlene Russell, Engineering Technician

RECEIVED  
 MAY 10 2006

DIV OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed) <b>BRAD LANEY</b>	Title <b>ENGINEERING SPECIALIST</b>
Signature	Date <b>May 9, 2006</b>

THIS SPACE FOR FEDERAL OR STATE USE

Approved by <i>Brad Laney</i>	Title	Date <b>5-9-06</b>
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



## United States Department of the Interior

BUREAU OF LAND MANAGEMENT  
Colorado State Office  
2850 Youngfield Street  
Lakewood, Colorado 80215-7076

IN REPLY REFER TO:

CO922 (MM)  
3106  
COC017387 et. al.

March 23, 2006

### NOTICE

Kerr-McGee Oil & Gas Onshore L.P. :  
1999 Broadway, Suite 3700 : Oil & Gas  
Denver, CO 80202 :

#### Merger/Name Change - Recognized

On February 28, 2006 this office received acceptable evidence of the following mergers and name conversion:

Kerr-McGee Oil & Gas Onshore L.P., a Delaware Limited Partnership, and Kerr-McGee Oil & Gas Onshore LLC, a Delaware Limited Partnership merger with and into Westport Oil and Gas Company L.P., a Delaware Limited Partnership, and subsequent Westport Oil & Gas Company L.P. name conversion to Kerr-McGee Oil & Gas Onshore L.P.

For our purposes the merger and name conversion was effective January 4, 2006, the date the Secretary of State of Delaware authenticated the mergers and name conversion.

Kerr-McGee Oil & Gas Onshore L.P. provided a list of oil and gas leases held by the merging parties with the request that the Bureau of Land Management change all their lease records from the named entities to the new entity, Kerr-McGee Oil & Gas Onshore L.P. In response to this request each state is asked to retrieve their own list of leases in the names of these entities from the Bureau of Land Management's (BLM) automated LR2000 data base.

The oil and gas lease files identified on the list provided by Kerr-McGee Oil & Gas Onshore L.P. have been updated as to the merger and name conversion. We have not abstracted the lease files to determine if the entities affected by the acceptance of these documents holds an interest in the lease, nor have we attempt to identify leases where the entity is the operator on the ground that maintains vested record title or operating rights interests. If additional documentation, for change of operator, is required you will be contacted directly by the appropriate Field Office. The Mineral Management Services (MMS) and other applicable BLM offices were notified of the merger with a copy of this notice

Please contact this office if you identify additional leases where the merging party maintains an interest, under our jurisdiction, and we will document the case files with a copy of this notice. If the leases are under the jurisdiction of another State Office that information will be forwarded to them for their action.

Three riders accompanied the merger/name conversion documents which will add Kerr-McGee Oil and Gas Onshore LLC as a principal to the 3 Kerr-McGee bonds maintained by the Wyoming State Office. These riders will be forward to them for their acceptance.

The Nationwide Oil & Gas Continental Casualty Company Bond #158626364 (BLM Bond #CO1203), maintained by the Colorado State Office, will remain in full force and effect until an assumption rider is accepted by the Wyoming State Office that conditions their Nationwide Safeco bond to accept all outstanding liability on the oil and gas leases attached to the Colorado bond.

If you have questions about this action you may call me at 303.239.3768.

/s/Martha L. Maxwell  
Martha L. Maxwell  
Land Law Examiner  
Fluid Minerals Adjudication

**Attachment:**

List of OG Leases to each of the following offices:

MMS MRM, MS 357B-1

WY, UT, NM/OK/TX, MT/ND, WY State Offices

CO Field Offices

Wyoming State Office

Rider #1 to Bond WY2357

Rider #2 to Bond WY1865

Rider #3 to Bond WY1127



# United States Department of the Interior



BUREAU OF LAND MANAGEMENT  
Utah State Office  
P.O. Box 45155  
Salt Lake City, UT 84145-0155  
<http://www.blm.gov>

IN REPLY REFER TO:  
3106  
(UT-922)

March 27, 2006

## Memorandum

To: Vernal Field Office

From: Chief, Branch of Fluid Minerals

Subject: Merger Approval

Attached is an approved copy of the merger recognized by the Bureau of Land Management, Colorado State Office. We have updated our records to reflect the merger from Westport Oil and Gas Company L.P. into Kerr-McGee Onshore Oil and Gas Company. The merger was approved effective January 4, 2006.

Chief, Branch of  
Fluid Minerals

## Enclosure

Approval letter from BLM COSO (2 pp)

cc: MMS, Reference Data Branch, James Sykes, PO Box 25165, Denver CO 80225  
State of Utah, DOGM, Attn: Earlene Russell, PO Box 145801, SLC UT 84114  
Teresa Thompson  
Joe Incardine  
Connie Seare  
Dave Mascarenas  
Susan Bauman

RECEIVED

MAR 28 2006

DIV. OF OIL, GAS & MINERAL

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
OMB No. 1004-0137  
Expires: July 31, 2010

**SUNDRY NOTICES AND REPORTS ON WELLS**  
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.*

5. Lease Serial No.  
Multiple Leases

6. If Indian, Allottee or Tribe Name

**SUBMIT IN TRIPLICATE** – Other instructions on page 2.

1. Type of Well  
 Oil Well     Gas Well     Other

2. Name of Operator  
EOG Resources, Inc

3a. Address  
1060 EAST HIGHWAY 40, VERNAL, UT 84078

3b. Phone No. (include area code)  
435-781-9145

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
See Attached

7. If Unit of CA/Agreement, Name and/or No.  
Natural Buttes

8. Well Name and No.  
Multiple Wells

9. API Well No.  
See Attached

10. Field and Pool or Exploratory Area  
Natural Buttes

11. Country or Parish, State  
Utah, Utah

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>Change of Operator</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. has assigned all of its right, title and interest in the wells described in the attached list ("the Subject Wells") to Kerr-McGee Oil & Gas Onshore LP and will relinquish and transfer operatorship of all of the Subject Wells to Kerr-McGee Oil & Gas Onshore LP on January 1, 2010.

As of January 1, 2010, Kerr-McGee Oil & Gas Onshore LP will be considered to be the operator of each of the Subject Wells and will be responsible under the terms and conditions of the applicable lease for the operations conducted upon the leased lands. Bond coverage is provided under Kerr-McGee Oil & Gas Onshore LP's Nationwide BLM Bond No. WYB-000291.

Kerr-McGee Oil & Gas Onshore LP  
1099 18th Street, Suite 1800  
Denver, CO 80202-1918

Accepted by the  
Utah Division of  
Oil, Gas and Mining  
For Record Only *ER 1/31/2010*

By: Michael A. Nixon Date: 12/17/2009  
Michael A. Nixon  
Agent and Attorney-in-Fact

14. I hereby certify that the foregoing is true and correct.

Name (Printed/Typed)  
J. Michael Schween

Title Agent and Attorney-in-Fact

Signature [Signature] Date 12/17/2009

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

RECEIVED

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date **DEC 24 2009**

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Office **DIV. OF OIL, GAS & MINING**

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Lease #	API #	Well Name	Footages	Legal Description
UTUO2270A	4304730261	NBU 1-07B	1975' FNL 1850' FWL	T10S-R21E-07-SESW
UTUO144868	4304730262	NBU 2-15B	1630' FSL 2125' FEL	T09S-R20E-15-NWSE
ML22651	4304730267	NBU 3-02B	1819' FNL 716' FWL	T10S-R22E-02-SWNW
UTUO10954A	4304730273	NBU 4-35B	2037' FNL 2539' FWL	T09S-R22E-35-SESW
ML22650	4304730272	NBU 5-36B	1023' FNL 958' FWL	T09S-R22E-36-NWNW
UTUO1791	4304730278	NBU 7-09B	330' FSL 1600' FWL	T10S-R21E-09-SESW
UTUO1207 ST	4304730274	NBU 10-29B	1100' FSL 1540' FEL	T09S-R22E-29-SWSE
UTUO1791	4304730294	NBU 13-08B	1600' FSL 1300' FEL	T10S-R21E-08-NESE
UTUO581	4304730296	NBU 15-29B	821' FNL 687' FWL	T09S-R21E-29-NWNW
UTUO1791	4304730316	NBU 16-06B	330' FSL 900' FEL	T10S-R21E-06-SESE
UTUO2270A	4304730317	NBU 17-18B	1014' FSL 2067' FEL	T10S-R21E-18-SWSE
UTUO144869	4304730328	NBU 19-21B	2015' FNL 646' FEL	T09S-R20E-21-SENE
UTUO575	4304730363	NBU 25-20B	1905' FNL 627' FWL	T09S-R21E-20-SWNW
UTU4485	4304730364	NBU 26-13B	600' FSL 661' FEL	T10S-R20E-13-SESE
UTUO1393B	4304730367	NBU 28-04B	529' FNL 2145' FWL	T10S-R21E-04-NENW
UTUO1393B	4304730368	NBU 29-05B	398' FSL 888' FWL	T10S-R21E-05-SESE
UTUO575	4304730380	NBU 30-18B	1895' FSL 685' FEL	T09S-R21E-18-NESE
ML01197A	4304730385	NBU 31-12B	565' FNL 756' FWL	T10S-R22E-12-NWNW
UTU461	4304730396	NBU 33-17B	683' FSL 739' FWL	T09S-R22E-17-SWSW
UTUO575	4304730404	NBU 34-17B	210' FNL 710' FEL	T09S-R21E-17-NENE
UTUO149767	4304730397	NBU 35-08B	1830' FNL 660' FWL	T09S-R21E-8-SWNW
UTUO144878B	4304730470	NBU 49-12B	551' FSL 1901' FEL	T09S-R20E-12-SWSE
UTUO140225	4304730473	NBU 52-01B	659' FSL 658' FEL	T09S-R21E-01-SESE
UTUO141315	4304730474	NBU 53-03B	495' FSL 601' FWL	T09S-R21E-03-SWSW
ML21510	4304730475	NBU 54-02B	660' FSL 660' FWL	T09S-R21E-02-SWSW
UTUO1193	4304730464	NBU 57-12B	676' FSL 1976' FEL	T09S-R21E-12-SWSE
UTUO1198B	4304730463	NBU 58-23B	1634' FNL 2366' FEL	T10S-R22E-23-SWNE
UTUO37167	4304730477	NBU 62-35B	760' FNL 2252' FEL	T10S-R22E-35-NWNE
UTU10186	4304730466	NBU 63-12B	1364' FNL 1358' FEL	T10S-R20E-12-SWNE
UTUO37167	4304730577	NBU 70-34B	1859' FSL 2249' FWL	T10S-R22E-34-NESW
UTU4476	4304730578	NBU 71-26B	1877' FNL 528' FEL	T10S-R20E-26-SENE
UTUO141315	4304731150	NBU 202-03	898' FSL 1580' FEL	T09S-R21E-03-SWSE
UTUO1791	4304731238	NBU 205-08	1432' FSL 1267' FWL	T10S-R21E-08-NWSW
UTUO1791	4304731165	NBU 206-09	1789' FNL 1546' FWL	T10S-R21E-09-SESW
UTUO1393B	4304731177	NBU 207-04	1366' FSL 1445' FWL	T10S-R21E-04-NESW
UTUO149076	4304731153	NBU 210-24	1000' FSL 1000' FWL	T09S-R21E-24-SWSW
UTUO284	4304731156	NBU 211-20	916' FSL 822' FEL	T09S-R22E-20-SESE
UTUO284	4304731267	NBU 212-19	289' FSL 798' FWL	T09S-R22E-19-SWSW
UTU22650	4304731268	NBU 213-36J	597' FNL 659' FEL	T09S-R22E-36-NENE
ML22651	4304731282	NBU 217-02	2045' FSL 766' FWL	T10S-R22E-02-NWSW
UTUO2270A	4304731310	NBU 218-17	2600' FNL 1500' FWL	T10S-R21E-17-SESW
UTUO149076	4304731308	NBU 219-24	1300' FNL 500' FWL	T09S-R21E-24-NWNW
UTUO149076	4304732131	NBU 301-24E	700' FSL 2450' FEL	T09S-R21E-24-SWSE
UTUO1791	4304732010	NBU 302-09E	1899' FSL 912' FWL	T10S-R21E-09-NWSW
UTUO575	4304732130	NBU 304-18E	782' FSL 1783' FEL	T09S-R21E-18-SWSE
UTUO149767	4304732135	NBU 305-07E	670' FNL 1950' FWL	T09S-R21E-07-NENW
UTUO581	4304732282	NBU 306-18E	1604' FSL 2797' FWL	T09S-R21E-18-NESW
UTUO1791	4304732014	NBU 307-06E	1979' FSL 2000' FEL	T10S-R21E-06-NWSE
UTUO284	4304732202	NBU 308-20E	1503' FSL 954' FWL	T09S-R22E-20-NWSW
UTUO575	4304732283	NBU 309-20E	930' FNL 667' FEL	T09S-R21E-20-NENE
UTUO149075	4304732203	NBU 311-23E	1101' FSL 1978' FEL	T09S-R21E-23-SWSE
UTUO581	4304732378	NBU 313-29E	1000' FNL 660' FEL	T09S-R21E-29-NENE
UTUO141315	4304732271	NBU 314-03E	1045' FSL 2584' FWL	T09S-R21E-03-SESW
UTUO575	4304732381	NBU 316-17E	1935' FNL 1067' FWL	T09S-R21E-17-SWNW
UTUO144868B	4304732362	NBU 317-12E	867' FNL 701' FEL	T09S-R20E-12-NENE
UTUO2270A	4304737511	NBU 319-17E	807' FNL 990' FWL	T10S-R21E-17-NWNW
UTUO1188	4304732379	NBU 321-10E	940' FSL 2508' FWL	T09S-R21E-10-SESW
UTUO575B	4304732376	NBU 325-08E	832' FSL 669' FWL	T09S-R21E-08-SWSW
UTUO1393B	4304733697	NBU 326-04E	1906' FNL 695' FWL	T10S-R21E-04-SWNW
UTUO1393B	4304739303	NBU 327-05E	1117' FNL 942' FEL	T10S-R21E-05-NENE (LOT 1)
UTU4485	4304732386	NBU 328-13E	1766' FSL 1944' FWL	T10S-R20E-13-NESW
UTUO1207 ST	4304732229	NBU 329-29E	2490' FNL 949' FEL	T09S-R22E-29-SENE

RECEIVED

DEC 24 2009

DIV. OF OIL, GAS & MINING

Lease #	API #	Well Name	Footages	Legal Description
UTUO10954A	4304732147	NBU 331-35E	1531' FNL 1153' FEL	T09S-R22E-35-SENE
UTUO1791	4304732148	NBU 332-08E	955' FSL 2508' FEL	T10S-R21E-08-SWSE
ML21510	4304732518	NBU 333-02E	1951' FSL 2245' FWL	T09S-R21E-02-NESW
UTUO149075	4304732265	NBU 335-23E	1419' FNL 828' FEL	T09S-R21E-23-SENE
UTUO149076	4304732264	NBU 336-24E	2024' FNL 1958' FWL	T09S-R21E-24-SENW
UTUO284	4304732281	NBU 339-19E	1890' FSL 674' FWL	T09S-R22E-19-NWSW
UTUO284B	4304732327	NBU 340-20E	1326' FSL 2569' FEL	T09S-R22E-20-NWSE
UTUO1207 ST	4304733055	NBU 341-29E	307' FSL 898' FEL	T09S-R22E-29-SESE
UTUO10954A	4304732212	NBU 342-35E	918' FNL 2563' FEL	T09S-R22E-35-NWNE
UTUO1393B	4304739338	NBU 346-05E	2233' FSL 676' FEL	T10S-R21E-05-NESE
UTUO575B	4304732326	NBU 349-07E	1641' FNL 1036' FWL	T09S-R21E-07-SWNW
UTUO1188	4304732519	NBU 352-10E	1806' FSL 842' FWL	T09S-R21E-10-NWSW
UTUO581	4304732383	NBU 356-29E	1600' FNL 1980' FEL	T09S-R21E-29-SWNE
UTUO2270A	4304732388	NBU 358-01E	736' FSL 1941' FEL	T10S-R20E-01-SWSE
UTU4485	4304750032	NBU 359-13E	661' FSL 2149' FEL	T10S-R20E-13-SWSE
UTU4485	4304732387	NBU 360-13E	1998' FSL 775' FWL	T10S-R20E-13-NWSW
ML21510	4304733782	NBU 379-02E	1967' FSL 898' FWL	T09S-R21E-02-NWSW
UTUO575	4304733064	NBU 382-18E	2030' FSL 2172' FEL	T09S-R21E-18-NWSE
UTUO149075	4304735889	NBU 384-23E	491' FSL 929' FEL	T09S-R21E-23-SESE
UTUO149076	4304733056	NBU 386-24E	450' FSL 1850' FWL	T09S-R21E-24-SESW
UTUO284	4304733057	NBU 388-19E	382' FSL 1847' FWL	T09S-R22E-19-SESW
UTUO1207 ST	4304733049	NBU 389-29E	2226' FSL 2166' FEL	T09S-R22E-29-NWSE
UTUO1393B	4304732835	NBU 390-04E	2577' FSL 1951' FWL	T10S-R21E-04-NESW
UTUO1393B	4304732988	NBU 391-05E	1215' FSL 2090' FEL	T10S-R21E-05-SWSE
UTUO1791	4304733783	NBU 392-06E	1926' FSL 611' FEL	T10S-R21E-06-NESE
UTU4485	4304733071	NBU 393-13E	1850' FSL 2141' FEL	T10S-R20E-13-NWSE
UTU4485	4304733072	NBU 394-13E	725' FSL 2027' FWL	T10S-R20E-13-SESW
UTUO1188	4304732544	NBU 400-11E	1983' FSL 1321' FWL	T09S-R21E-11-NESW
UTUO581	4304734216	NBU 421-29E	1985 FNL, 972 FEL	T09S-R21E-29-SENE
UTUO581	4304733698	NBU 422-29E	1980' FNL 785' FWL	T09S-R21E-29-SWNW
UTUO581	4304734206	NBU 423-30E	1980' FSL 660' FEL	T09S-R21E-30-NESE
ML3142	4304733699	NBU 424-32E	744' FNL 773' FEL	T09S-R21E-32-NENE
UTUO2270A	4304740049	NBU 428-07E	660' FSL 855' FWL	T10S-R21E-07-SWSW (Lot 4)
UTUO1791	4304733069	NBU 431-09E	2599' FNL 662' FWL	T10S-R21E-09-SWNW
UTUO2270A	4304738536	NBU 434-17E	1799' FNL 2176' FWL	T10S-R21E-17-SENW
UTUO2270A	4304738376	NBU 435-17E	1837' FNL 571' FWL	T10S-R21E-17-SWNW
UTUO2270A	4304734195	NBU 436-18E	1644' FSL 748' FEL	T10S-R21E-18-NESE
UTUO2270A	4304735499	NBU 437-18E	322' FSL 748' FEL	T10S-R21E-18-SESE
ML22792	4304737534	NBU 438-19E	661' FNL 1941' FEL	T10S-R21E-19-NWNE
ML22792	4304737535	NBU 439-19E	2111' FNL 1980' FWL	T10S-R21E-19-SWNE
UTUO10953	4304736279	NBU 451-01E	1965' FSL 2132' FWL	T10S-R22E-01-NESW
ML22651	4304736053	NBU 456-02E	493' FNL 1080' FWL	T10S-R22E-02-NWNW (Lot 4)
UTUO141315	4304733063	NBU 481-03E	1490' FSL 556' FEL	T09S-R21E-03-NESE
UTUO581	4304733065	NBU 483-19E	1850' FSL 1980' FWL	T09S-R21E-19-NESW
UTUO575	4304733784	NBU 484-20E	350' FNL 823' FWL	T09S-R21E-20-NWNW
UTUO2270A	4304739897	NBU 486-07E	1895 FSL' 1834' FWL	T10S-R21E-07-NESW
UTUO575B	4304733121	NBU 489-07E	763' FSL 733' FWL	T09S-R21E-07-SWSW (Lot 4)
UTUO2270A	4304733123	NBU 497-01E	2091' FSL 894' FEL	T10S-R20E-01-NESE
UTUO577A	4304733140	NBU 506-23E	720' FNL 1818' FWL	T09S-R20E-23-NENW
UTUO1791	4304733124	NBU 508-08E	915' FSL 355' FEL	T10S-R21E-08-SESE
UTUO1197A ST	4304739283	NBU 513-12EX	1850' FNL 2133' FWL	T10S-R22E-12-SENW
UTUO2270A	4304733696	NBU 516-12E	1950' FSL 1786' FEL	T10S-R20E-12-NWSE
UTUO141315	4304733779	NBU 519-03E	1749' FSL 798' FWL	T09S-R21E-03-NWSW
UTUO575B	4304733780	NBU 521-08E	2250' FSL 900' FWL	T09S-R21E-08-NWSW
UTUO1188	4304733781	NBU 522-10E	732' FSL 841' FEL	T09S-R21E-10-SESE
UTUO2270A	4304733685	NBU 523-12E	660' FSL 660' FEL	T10S-R20E-12-SESE
UTUO2270A	4304733701	NBU 524-12E	841' FSL 1795' FEL	T10S-R20E-12-SWSE
UTUO2270A	4304739722	NBU 529-07E	704' FNL 762' FWL	T10S-R21E-07-NWNW
UTUO581	4304734639	NBU 534-18E	1885' FSL 115' FWL	T09S-R21E-18-NWSW
UTUO2270A	4304735200	NBU 535-17E	1893' FSL 580' FWL	T10S-R21E-17-NWSW
ML22791	4304735252	NBU 536-18E	734' FSL 2293' FWL	T10S-R21E-18-SESW
UTUO2270A	4304735253	NBU 537-18E	1880' FSL 1830' FEL	T10S-R21E-18-NWSE

RECEIVED

DEC 24 2009

Lease #	API #	Well Name	Footages	Legal Description
UTUO284	4304735886	NBU 538-19E	1937' FSL 1833' FWL	T09S-R22E-19-NESW
UTUO149076	4304735887	NBU 539-24E	1870' FSL 477' FEL	T09S-R21E-24-NESE
UTUO10953	4304736280	NBU 546-01E	2036' FSL 699' FWL	T10S-R22E-01-NWSW
UTUO10953	4304736278	NBU 547-01E	749' FSL 598' FWL	T10S-R22E-01-SWSW
UTU474	4304737687	NBU 553-28E	767' FNL 753' FWL	T10S-R22E-28-NWNW
UTU474	4304737686	NBU 554-28E	2023' FNL 465' FWL	T10S-R22E-28-SWNW
ML22791	4304737685	NBU 555-18E	1984' FSL 1790' FWL	T10S-R21E-18-NESW
ML22791	4304737514	NBU 556-18E	1800' FSL 870' FWL	T10S-R21E-18-NWSW
ML22791	4304737513	NBU 557-18E	852' FSL 661' FWL	T10S-R21E-18-SWSW
UTUO2270A	4304737510	NBU 558-17E	748' FSL 611' FWL	T10S-R21E-17-SWSW
UTUO2278C	4304737509	NBU 559-17E	467' FSL 2065' FWL	T10S-R21E-17-SESW
UTUO2278	4304737508	NBU 560-17E	1946' FSL 1896' FWL	T10S-R21E-17-NESW
UTUO2278	4304737512	NBU 561-17E	857' FSL 1988' FEL	T10S-R21E-17-SWSE
ML22792	4304737536	NBU 562-19E	859' FNL 859' FEL	T10S-R21E-19-NENE
ML22792	4304737537	NBU 563-19E	1982' FSL 1878' FEL	T10S-R21E-19-NWSE
UTU4476	4304738962	NBU 564-26E	665' FNL 1945' FWL	T10S-R20E-26-NENW
ML22793	4304737533	NBU 565-30E	1865' FNL 1786' FEL	T10S-R21E-30-SWNE
UTUO2270A	4304738375	NBU 566-17E	538' FNL 1806' FWL	T10S-R21E-17-NENW
UTUO1791	4304738535	NBU 567-17E	690' FNL 1988' FEL	T10S-R21E-17-NWNE
UTUO1791	4304738537	NBU 568-17E	850' FNL 807' FEL	T10S-R21E-17-NENE
UTUO1791	4304738534	NBU 569-17E	2009' FNL 1809' FEL	T10S-R21E-17-SWNE
UTUO1791	4304738529	NBU 570-17E	2031' FNL 672' FEL	T10S-R21E-17-SENE
UTUO2278	4304738377	NBU 571-17E	1964' FSL 1831' FEL	T10S-R21E-17-NWSE
UTUO2278	4304738374	NBU 572-17E	1810' FSL 739' FEL	T10S-R21E-17-NESE
UTUO2278	4304738510	NBU 573-17E	813' FSL 481' FEL	T10S-R21E-17-SESE
ML22650	4304739308	NBU 602-36E	1723' FNL 719' FWL	T09S-R22E-36-SWNW
UTUO1393B	4304739305	NBU 614-05E	716' FNL 1967' FEL	T10S-R21E-05-NWNE
UTUO1393B	4304739655	NBU 615-05E	2384' FNL 1015' FEL	T10S-R21E-05-SENE
UTUO1393B	4304739337	NBU 617-04E	933' FNL 745' FWL	T10S-R21E-04-NWNW
UTUO1393B	4304739336	NBU 618-04E	998' FSL 661' FWL	T10S-R21E-04-SWSW
UTUO1393B	4304739414	NBU 625-04E	1937' FNL 1722' FWL	T10S-R21E-04-SENW
UO01197A ST	4304739192	NBU 632-12E	860' FNL 2032' FWL	T10S-R22E-12-NENW
UO01197A ST	4304739193	NBU 633-12E	789' FNL 2179' FEL	T10S-R22E-12-NWNE
UO01197A ST	4304739190	NBU 635-12E	1808' FNL 1754' FEL	T10S-R22E-12-SWNE
UTUO1197A ST	4304739191	NBU 636-12E	1824' FNL 461' FEL	T10S-R22E-12-SENE
UTUO8512 ST	4304750016	NBU 638-13E	1926' FNL 2504' FWL	T10S-R22E-13-SENW
UTUO8512 ST	4304750019	NBU 639-13E	859' FNL 1902' FEL	T10S-R22E-13-NWNE
UTUO8512 ST	4304750014	NBU 640-13E	1619' FNL 1639' FEL	T10S-R22E-13-SWNE
UTUO8512A ST	4304750058	NBU 641-13E	990' FNL 1184' FEL	T10S-R22E-13-NENE
UTUO8512 ST	4304750013	NBU 642-13E	1949' FNL 858' FEL	T10S-R22E-13-SENE
UTUO2270A	4304739957	NBU 653-07E	660' FNL 1980' FWL	T10S-R21E-07-NENW
UTUO2270A	4304739956	NBU 654-07E	1913' FNL 522' FWL	T10S-R21E-07-SWNW
UTUO2270A	4304739860	NBU 655-07E	1926' FSL 750' FWL	T10S-R21E-07-NWSW
UTUO1791	4304739856	NBU 658-01E	2177' FNL 1784' FEL	T10S-R20E-01-SWNE
UTUO2270A	4304739858	NBU 660-12E	661' FNL 691' FEL	T10S-R20E-12-NENE
ML22790	4304750011	NBU 661-24E	1734' FSL 661' FWL	T10S-R20E-24-NWSW
ML22790	4304750017	NBU 662-24E	809' FSL 807' FWL	T10S-R20E-24-SWSW
ML22790	4304750010	NBU 663-24E	810' FSL 1979' FWL	T10S-R20E-24-SESW
ML22790	4304739867	NBU 664-24E	1810' FNL 1781' FEL	T10S-R20E-24-NWSE
ML22790	4304750018	NBU 665-24E	1950' FSL 660' FEL	T10S-R20E-24-NESE
ML22790	4304750057	NBU 666-24E	1043' FSL 1722' FEL	T10S-R20E-24-SWSE
ML22790	4304750012	NBU 667-24E	660' FSL 660' FEL	T10S-R20E-24-SESE
UTUO2270A	4304739901	NBU 668-12E	859' FNL 1915' FEL	T10S-R20E-12-NWNE
UO1207 ST	4304740084	NBU 670-29E	2018' FSL 859' FEL	T09S-R22E-29-NESE
UO1207 ST	4304750027	NBU 691-29E	680' FNL 797' FEL	T09S-R22E-29-NENE
ML3140.5	4304738330	NBU 760-36E	1320' FNL 1320' FEL	T09S-R20E-36-NENE
UTU4476	4304738632	NBU 762-26E	1506' FNL 1449' FEL	T10S-R20E-26-SWNE
ML22792	4304738332	NBU 763-19E	1258' FSL 1388' FEL	T10S-R21E-19-SWSE
ML3142	4304738331	NBU 764-32E	875' FNL 667' FWL	T09S-R21E-32-NWNW
UTUO1791	4304738633	NBU 765-09E	1000' FSL 1640' FWL	T10S-R21E-09-SESW

RECEIVED

DEC 24 2009

DIV. OF OIL, GAS & MINING

<b>STATE OF UTAH</b> DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		<b>FORM 9</b>  <b>5. LEASE DESIGNATION AND SERIAL NUMBER:</b> U-01791
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b>  Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		<b>6. IF INDIAN, ALLOTTEE OR TRIBE NAME:</b>  <b>7. UNIT or CA AGREEMENT NAME:</b> NATURAL BUTTES
<b>1. TYPE OF WELL</b> Gas Well	<b>8. WELL NAME and NUMBER:</b> NBU 332-8E	
<b>2. NAME OF OPERATOR:</b> KERR-MCGEE OIL & GAS ONSHORE, L.P.	<b>9. API NUMBER:</b> 43047321480000	
<b>3. ADDRESS OF OPERATOR:</b> P.O. Box 173779 1099 18th Street, Suite 600, Denver, CO, 80217 3779	<b>PHONE NUMBER:</b> 720 929-6515 Ext	<b>9. FIELD and POOL or WILDCAT:</b> NATURAL BUTTES
<b>4. LOCATION OF WELL</b> <b>FOOTAGES AT SURFACE:</b> 0955 FSL 2508 FEL <b>QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN:</b> Qtr/Qtr: SWSE Section: 08 Township: 10.0S Range: 21.0E Meridian: S	<b>COUNTY:</b> UINTAH  <b>STATE:</b> UTAH	
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
<b>TYPE OF SUBMISSION</b>	<b>TYPE OF ACTION</b>	
<input type="checkbox"/> NOTICE OF INTENT Approximate date work will start:	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input checked="" type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	
<input checked="" type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: 10/5/2011	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER: <input style="width: 50px;" type="text"/>	
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> APD EXTENSION	
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. THE SUBJECT WELL WAS RETURNED BACK TO PRODUCTION ON 10/05/2011.		
<p style="margin: 0;"><b>Accepted by the</b></p> <p style="margin: 0;"><b>Utah Division of</b></p> <p style="margin: 0;"><b>Oil, Gas and Mining</b></p> <p style="margin: 0;"><b>FOR RECORD ONLY</b></p>		
<b>NAME (PLEASE PRINT)</b> Sheila Wopsock	<b>PHONE NUMBER</b> 435 781-7024	<b>TITLE</b> Regulatory Analyst
<b>SIGNATURE</b> N/A	<b>DATE</b> 11/17/2011	